

Test report

Customer:

DewertOkin GmbH

Weststraße 1
32278 Kirchlengern
Germany
Tel.: +49 5223 979-0
Fax: +49 5223 751-82

RF test report

160583-AU01+W04



Industry
Canada Industrie
Canada

DewertOkin GmbH

RF Gateway

Bluetooth RF-Gateway
(BLE mode)



The test result refers exclusively to the model tested.

This test report may not be copied or published in extracts without the written authorization of the accreditation agency and/or EMV **TESTHAUS** GmbH



EMV **TESTHAUS** GmbH

Gustav-Hertz-Straße 35
94315 Straubing
Germany
Tel.: +49 9421 56868-0
Fax: +49 9421 56868-100
Email: info@emv-testhaus.com

Accreditation:



FCC facility registration number: 221458
Test Firm Type "2.948 listed": Valid until 2017-04-22
Test Firm Type "accredited": Valid until 2017-06-09
MRA US-EU, FCC designation number: DE0010
BnetzA-CAB-02/21-02/04 Valid until 2018-11-27

Industry Canada test site numbers with registration expiry date:
3472A-1, expiring 2018-11-09
3472A-2, expiring 2018-11-12

Test laboratory:

EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

The technical accuracy is guaranteed through the quality management of
EMV **TESTHAUS** GmbH.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

DewertOkin GmbH
RF Gateway
Bluetooth RF-Gateway
(BLE mode)

Table of contents

| | | |
|------|--|----|
| 1 | Summary of test results | 6 |
| 2 | Referenced publications | 8 |
| 3 | Equipment under test (EUT) | 9 |
| 4 | Test configuration and mode of operation..... | 10 |
| 4.1 | Test configuration | 10 |
| 4.2 | Attenuation of test cable(s) | 10 |
| 4.3 | Mode of operation..... | 10 |
| 5 | Measurement Procedures | 11 |
| 5.1 | AC power line conducted emissions 150 kHz to 30 MHz | 11 |
| 5.2 | 20 dB bandwidth (DTS) | 12 |
| 5.3 | 6 dB bandwidth (DTS) | 12 |
| 5.4 | Occupied bandwidth (99%)..... | 13 |
| 5.5 | Maximum conducted output power (DTS)..... | 13 |
| 5.6 | Power spectral density..... | 14 |
| 5.7 | Band-edge compliance (radiated)..... | 14 |
| 5.8 | Spurious radiated emissions 9 kHz to 10 th harmonic..... | 14 |
| 5.9 | Conducted emissions at antenna connector | 15 |
| 5.10 | Radiated emissions | 16 |
| 6 | Test results..... | 20 |
| 6.1 | AC power line conducted emissions 150 kHz to 30 MHz | 21 |
| 6.2 | 20 dB bandwidth..... | 25 |
| 6.3 | 6 dB bandwidth..... | 29 |
| 6.4 | Occupied bandwidth | 33 |
| 6.5 | Maximum conducted output power | 37 |
| 6.6 | Power spectral density..... | 41 |
| 6.7 | Band-edge compliance (radiated)..... | 48 |
| 6.8 | Spurious radiated emissions 9 kHz to 10th harmonic..... | 55 |
| 6.9 | Radio frequency radiation exposure evaluation for mobile devices | 72 |
| 7 | Equipment calibration status..... | 78 |
| 8 | Measurement uncertainties | 79 |
| 9 | Revision history | 80 |
| 10 | Additional documents | 80 |



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

DewertOkin GmbH
 RF Gateway
Bluetooth RF-Gateway
 (BLE mode)

List of figures

| | |
|--|----|
| Figure 1: Setup for AC power line conducted emissions test 150 kHz to 30 MHz | 11 |
| Figure 2: Test setup for conducted emission | 15 |
| Figure 3: Setup for radiated emission test below 30 MHz | 16 |
| Figure 4: Setup for radiated emission test from 30 MHz to 1 GHz | 17 |
| Figure 5: Setup for radiated emission test above 1 GHz..... | 18 |
| Figure 6: Chart of AC power line conducted emissions test 150 kHz to 30 MHz – phase L1 | 23 |
| Figure 7: Chart of AC power line conducted emissions test 150 kHz to 30 MHz – phase N..... | 24 |
| Figure 8: Chart of 20 dB bandwidth test, channel low..... | 26 |
| Figure 9: Chart of 20 dB bandwidth test, channel mid | 27 |
| Figure 10: Chart of 20 dB bandwidth test, channel high..... | 28 |
| Figure 11: Chart of 6 dB bandwidth test, channel low | 30 |
| Figure 12: Chart of 6 dB bandwidth test, channel mid | 31 |
| Figure 13: Chart of 6 dB bandwidth test, channel high | 32 |
| Figure 14: Chart of occupied bandwidth test, channel low | 34 |
| Figure 15: Chart of occupied bandwidth test, channel mid..... | 35 |
| Figure 16: Chart of occupied bandwidth test, channel high..... | 36 |
| Figure 17: Chart of maximum conducted output power test, channel low | 38 |
| Figure 18: Chart of maximum conducted output power test, channel mid | 39 |
| Figure 19: Chart of maximum conducted output power test, channel high | 40 |
| Figure 20: Chart of power spectral density test, channel low - complete carrier..... | 42 |
| Figure 21: Chart of power spectral density test, channel low - zoom to maximum | 43 |
| Figure 22: Chart of power spectral density test, channel mid - complete carrier | 44 |
| Figure 23: Chart of power spectral density test, channel mid - zoom to maximum..... | 45 |
| Figure 24: Chart of power spectral density test, channel high - complete carrier | 46 |
| Figure 25: Chart of power spectral density test, channel high - zoom to maximum..... | 47 |
| Figure 26: Chart of band edge compliance test, lower band edge - PK | 51 |
| Figure 27: Chart of band edge compliance test, lower band edge - AV | 51 |
| Figure 28: Chart of band edge compliance test, upper band edge - PK..... | 53 |
| Figure 29: Chart of band edge compliance test, upper band edge - AV | 53 |
| Figure 30: Chart of spurious radiated emission test 9 kHz - 30 MHz, channel low | 58 |
| Figure 31: Chart of spurious radiated emission test 9 kHz - 30 MHz, channel mid..... | 59 |
| Figure 32: Chart of spurious radiated emission test 9 kHz - 30 MHz, channel high..... | 60 |
| Figure 33: Chart of spurious radiated emission test 30 MHz - 1 GHz, channel low | 62 |
| Figure 34: Chart of spurious radiated emission test 30 MHz - 1 GHz, channel mid..... | 63 |
| Figure 35: Chart of spurious radiated emission test 30 MHz - 1 GHz, channel high..... | 64 |
| Figure 36: 1 st Chart of spurious radiated emission test 1 GHz to 10 th harmonic, channel low | 66 |
| Figure 37: 2 nd Chart of spurious radiated emission test 1 GHz to 10 th harmonic, channel low..... | 66 |
| Figure 38: 1 st Chart of spurious radiated emission test 1 GHz to 10 th harmonic, channel mid | 68 |
| Figure 39: 2 nd Chart of spurious radiated emission test 1 GHz to 10 th harmonic, channel mid | 68 |
| Figure 40: 1 st Chart of spurious radiated emission test 1 GHz to 10 th harmonic, channel high | 70 |
| Figure 41: 2 nd Chart of spurious radiated emission test 1 GHz to 10 th harmonic, channel high | 70 |



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

DewertOkin GmbH
 RF Gateway
Bluetooth RF-Gateway
 (BLE mode)

List of tables

| | |
|--|----|
| Table 1: Devices used for testing | 10 |
| Table 2: Ports of EUT and appropriate cables | 10 |
| Table 3: Attenuation of test cable | 10 |
| Table 4: Final results of 20 dB bandwidth test | 28 |
| Table 5: Final results of 6 dB bandwidth test | 32 |
| Table 6: Final results of occupied bandwidth test | 36 |
| Table 7: Final results of maximum conducted output power test..... | 40 |
| Table 8: Final results of power spectral density test | 47 |
| Table 9: Final result of band edge compliance test, lower band edge..... | 52 |
| Table 10: Final result of band edge compliance test, upper band edge | 54 |
| Table 11: Final result of spurious radiated emission test 1 GHz to 10 th harmonic, channel low..... | 67 |
| Table 12: Final result of spurious radiated emission test 1 GHz to 10 th harmonic, channel mid | 69 |
| Table 13: Final result of spurious radiated emission test 1 GHz to 10 th harmonic, channel high | 71 |
| Table 14: Limits for maximum permissible exposure (MPE) according to table 1 of §1.1310(e)..... | 73 |
| Table 15: RF field strength limits according to table 4 of RSS-102 | 74 |
| Table 16: Calculated results compared to RF field strength limits..... | 76 |
| Table 17: Equipment calibration status..... | 78 |
| Table 18: Measurement uncertainty | 79 |



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

DewertOkin GmbH
 RF Gateway
Bluetooth RF-Gateway
 (BLE mode)

1 Summary of test results

System type: Digital transmission system (DTS)

| 47 CFR part and section | Test | Equivalent to IC radio standard(s) | Page | Result | Note(s) |
|---|---|--|------|-----------------------|---------|
| 15.207 | AC power line conducted emissions 150 kHz to 30 MHz | RSS-Gen Issue 4, section 8.8 | 21 | Passed | --- |
| 15.247(a)(1) KDB 558074, section 8 | 20 dB bandwidth | RSS-247 Issue 2, section 5.1(b) | 25 | Passed | --- |
| 15.247(a)(2) KDB 558074, section 8 | 6 dB bandwidth | RSS-247 Issue 2, section 5.2(a) | 29 | Passed | 1 |
| 2.202(a) ANSI C63.10 | Occupied bandwidth (99 %) | RSS-Gen Issue 4, section 6.6 | 33 | For reference only | 1 |
| 15.247(b) KDB 558074, section 9 | Maximum conducted output power | RSS-Gen Issue 4, section 6.12 RSS-247 Issue 2, section 5.4 | 37 | Passed | --- |
| 15.247(e) KDB 558074, section 10 | Power spectral density | RSS-247 Issue 2, section 5.2(b) | 41 | Passed | --- |
| 15.247(d) KDB 558074, sections 11 & 12 | Antenna-port conducted measurements | RSS-247 Issue 2, section 5.5 | --- | Not applicable | 2 |
| 15.247(d) KDB 558074, section 13 | Band-edge compliance (radiated) | RSS-247 Issue 2, section 5.5 | 48 | Passed | --- |
| 15.247(d) KDB 558074, sections 11 & 12 | Spurious radiated emissions 9 kHz to 10 th harmonic | RSS-Gen Issue 4, section 6.13 RSS-247 Issue 2, section 5.5 | 55 | Passed | --- |
| 2.1091 | RF exposure evaluation for mobile devices | RSS-Gen Issue 4, section 3.2 (exempted form SAR and RF evaluation) | 72 | Passed | --- |

Notes:

- 1 For systems using digital modulation techniques the 6 dB bandwidth (DTS bandwidth) is regarded as the occupied bandwidth.
- 2 Spurious radiated emissions 9 kHz to 10th harmonic performed



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

DewertOkin GmbH
RF Gateway
Bluetooth RF-Gateway
(BLE mode)

Straubing, March 9, 2017



Martin Müller
Test engineer
EMV **TESTHAUS** GmbH



Rainer Heller
Head of EMC / radio department
EMV **TESTHAUS** GmbH



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

DewertOkin GmbH
RF Gateway
Bluetooth RF-Gateway
(BLE mode)

160583-AU01+W04

Page 7 of 80

2 Referenced publications

| <i>Publication</i> | <i>Title</i> |
|---|--|
| CFR 47 Part 2 October 2016 | Code of Federal Regulations, Title 47 (Telecommunication), Part 2 (Frequency allocation and radio treaty matters; General rules and regulations) of the Federal Communication Commission (FCC) |
| CFR 47 Part 15 October 2016 | Code of Federal Regulations, Title 47 (Telecommunication), Part 15 (Radio Frequency Devices) of the Federal Communication Commission (FCC) |
| KDB Publication no. 412172 August 7, 2015 | Guidelines for determining the Effective Radiated Power (ERP) and Equivalent Isotropically Radiated Power (EIRP) of an RF transmitting system |
| KDB Publication no. 447498 October 23, 2015 | RF exposure procedures and equipment authorization policies for mobile and portable devices |
| KDB Publication no. 558074 April 8, 2016 | Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 |
| ANSI C63.10 June 2013 | American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices |
| RSS-Gen, Issue 4 November 2014 | Spectrum Management and Telecommunications - Radio Standards Specification - General Requirements for Compliance of Radio Apparatus |
| RSS-102, Issue 5 March 2015 | Spectrum Management and Telecommunications - Radio Standards Specification - Radio Frequency Exposure Compliance of Radiocommunications Apparatus |
| RSS-247, Issue 2 February 2017 | Spectrum Management and Telecommunications - Radio Standards Specification - Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices |



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

DewertOkin GmbH
RF Gateway
Bluetooth RF-Gateway
(BLE mode)

160583-AU01+W04

Page 8 of 80

3 Equipment under test (EUT)

Product type: RF Gateway

Model name: Bluetooth RF-Gateway

Serial number(s): D123456 0001 -> for radiated tests
D123456 0002 -> for conducted tests

Applicant: DewertOkin GmbH

Manufacturer: DewertOkin GmbH

Version: Hardware: ---
Software: ---

Additional modifications: None

FCC ID: O3YGATEWAY1089

IC registration number: 10744A-GATEWAY1089

Application frequency band: 2400.0 MHz - 2483.5 MHz

Frequency range: 2402.0 MHz - 2480.0 MHz

Operating frequencies: 2402.0 MHz - 2480.0 MHz

Channel spacing: 1 MHz

Number of RF channels: 37 data channels
3 advertising channels

System type: Digital transmission system (DTS)

Modulation type(s): GFSK

Class of emission: F1D

Antenna type(s): PCB antenna (F-Antenna layouted)

Antenna gain(s): approximately 0 dBi

Power supply: AC supply
Nominal voltage: 120.0 V
Minimum voltage: 100.0 V
Maximum voltage: 240.0 V
Nominal frequency: 60 Hz

Temperature range: 0 °C to +40 °C

Device type: Portable Mobile Fixed



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

DewertOkin GmbH
RF Gateway
Bluetooth RF-Gateway
(BLE mode)

4 Test configuration and mode of operation

4.1 Test configuration

| <i>Device</i> | <i>Type designation</i> | <i>Serial or inventory no.</i> | <i>Manufacturer</i> |
|--------------------------------------|-------------------------|--------------------------------|---------------------|
| RF Gateway | Bluetooth RF-Gateway | D123456 0001 | DewertOkin GmbH |
| RF Gateway | Bluetooth RF-Gateway | D123456 0002 | DewertOkin GmbH |
| AC power source (120 VAC / 60 Hz) | 61605 | SEB00214 | CHROMA A.T.E. |

Table 1: Devices used for testing

| <i>Port</i> | <i>Classification</i> | <i>Cable type</i> | <i>Cable length</i> | |
|-------------|-----------------------|-------------------|---------------------|----------------------------|
| | | | <i>used</i> | <i>maximum¹</i> |
| AC power | ac power | Unshielded | 1.5 m | --- |

Table 2: Ports of EUT and appropriate cables

4.2 Attenuation of test cable(s)

| <i>Frequency (MHz)</i> | <i>Attenuation (dB).</i> |
|------------------------|--------------------------|
| 2402.0 | 0.54 |
| 2440.0 | 0.55 |
| 2480.0 | 0.55 |

Table 3: Attenuation of test cable

4.3 Mode of operation

EUT was tested in following mode(s) of operation:

BLE (Bluetooth Low Energy) mode

Channel low -> 2402.0 MHz (modulated / unmodulated)

Channel mid -> 2440.0 MHz (modulated / unmodulated)

Channel high -> 2480.0 MHz (modulated / unmodulated)

Note: Test results of EUT operating in SRD mode can be found in test report no. 160583-AU01+W03.

¹ As specified by applicant



5 Measurement Procedures

5.1 AC power line conducted emissions 150 kHz to 30 MHz

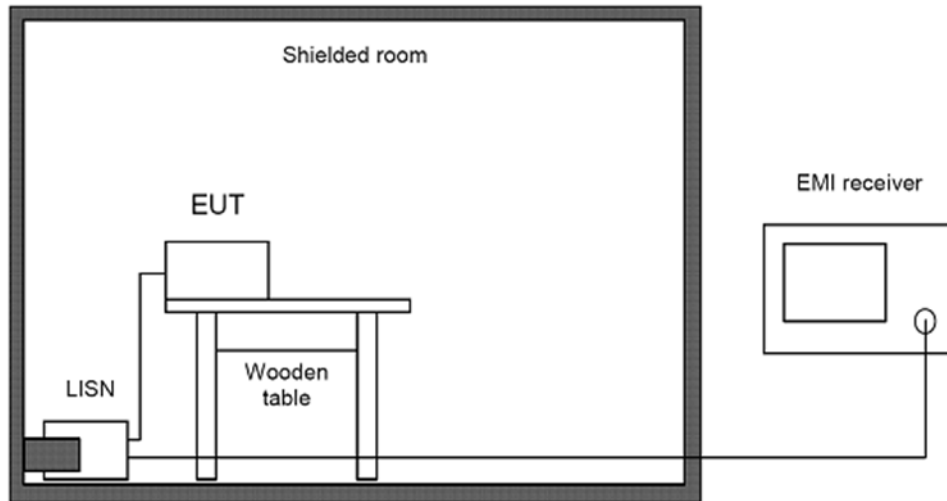


Figure 1: Setup for AC power line conducted emissions test 150 kHz to 30 MHz

The AC power line conducted emissions test method refers to section 6.2 of ANSI C63.10 and shall be as follows:

The tests of conducted emission are carried out in a shielded room using a line impedance stabilization network (LISN) 50 μ H/50 Ohms and a EMI test receiver. The EMI test receiver is connected to the LISN and set to a measurement bandwidth of 9 kHz in the frequency range from 0.15 MHz to 30 MHz. The EUT is placed on a wooden table and connected to the LISN.

For prescan covering the whole frequency range from 0.15 MHz to 30 MHz the detector function of the EMI test receiver is set to peak. After that, all peak values with less margin than 10 dB to quasi-peak limit or exceeding the limit are marked and re-measured with quasi-peak detector. If all values are below the average limit no additional measurement is necessary. Otherwise these values are re-measured using an average detector.

All peripheral devices are decoupled by connecting them to an additional line stabilization network.

5.2 20 dB bandwidth (DTS)

The 20 dB bandwidth test method for DTS systems shall be analog to the 6 dB bandwidth test method for DTS systems.

For test setup see clause 5.9.

5.3 6 dB bandwidth (DTS)

The 6 dB bandwidth (DTS bandwidth) test method for DTS systems refers to section 8.0 of KDB 558074 D01 and shall be as follows:

Spectrum analyzer settings:

Span = centered on a channel, wide enough to capture the whole channel

RBW = 100 kHz

VBW $\geq 3 \times$ RBW

Sweep time = auto coupled

Detector function = peak

Trace mode = max hold

Reference level: more than $10 \cdot \log(\text{OBW}/\text{RBW})$ dB above peak of spectral envelope

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

If possible, use the automatic bandwidth measurement capability of the spectrum analyzer using the X dB bandwidth mode with X set to 6 dB. Submit this plot(s).

For test setup see clause 5.9.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

DewertOkin GmbH
RF Gateway
Bluetooth RF-Gateway
(BLE mode)

5.4 Occupied bandwidth (99%)

The occupied bandwidth test method refers to section 6.9.3 of ANSI C63.10 and shall be as follows:

Spectrum analyzer settings:

Span = between 1.5 times and 5.0 times of the OBW, centered on a channel

RBW \geq in the range of 1% to 5% of the OBW

VBW \geq approximately three times the RBW

Sweep time = auto coupled

Detector function = peak

Trace mode = max hold

Reference level: more than $10 \cdot \log(\text{OBW}/\text{RBW})$ dB above peak of spectral envelope

Use the 99% power bandwidth function of the spectrum analyzer and report the measured bandwidth.

For test setup see clause 5.9.

5.5 Maximum conducted output power (DTS)

The maximum conducted output power test method for DTS systems refers to section 9.1.1 of KDB 558074 D01 and shall be as follows:

Spectrum analyzer settings:

Span $\geq 3 \times \text{RBW}$, centered on a channel

RBW \geq DTS bandwidth

VBW $\geq 3 \times \text{RBW}$

Sweep time = auto coupled

Detector function = peak

Trace mode = max hold

Reference level: more than $10 \cdot \log(\text{OBW}/\text{RBW})$ dB above peak of spectral envelope

Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the maximum conducted output power. Submit this plot(s).

For test setup see clause 5.9.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

DewertOkin GmbH
RF Gateway
Bluetooth RF-Gateway
(BLE mode)

5.6 Power spectral density

The power spectral density test method refers to section 10.2 of KDB 558074 D01 and shall be as follows:

Spectrum analyzer settings:

Span = 1.5 times the DTS bandwidth, centered on a channel

RBW: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$

VBW $\geq 3 \times \text{RBW}$

Sweep time = auto coupled or $\geq \text{span}/\text{RBW}$ in seconds, whichever is greater

Detector function = peak

Trace mode = max hold

Reference level: more than $10 \cdot \log(\text{OBW}/\text{RBW})$ dB above peak of spectral envelope

Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the power spectral density. Submit this plot(s).

For test setup see clause 5.9.

5.7 Band-edge compliance (radiated)

For test setup and test method see clause 5.10.

5.8 Spurious radiated emissions 9 kHz to 10th harmonic

For test setup and test method see clause 5.10.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

DewertOkin GmbH
RF Gateway
Bluetooth RF-Gateway
(BLE mode)

5.9 Conducted emissions at antenna connector

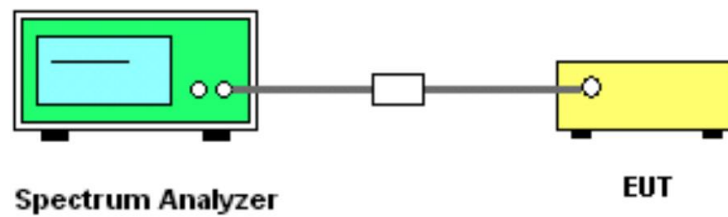


Figure 2: Test setup for conducted emission

The RF signal of the EUT is measured at the antenna connector. In case of no permanent antenna connector, a temporary antenna connector is supplied by the manufacturer. The specific insertion loss of the signal path, which is matched to 50 Ohm, is evaluated within a calibration. The test receiver is set to analyzer mode with pre-selector activated. The measurement readings on the test receiver are corrected by the signal path loss.

5.10 Radiated emissions

5.10.1 Radiated emissions below 30 MHz

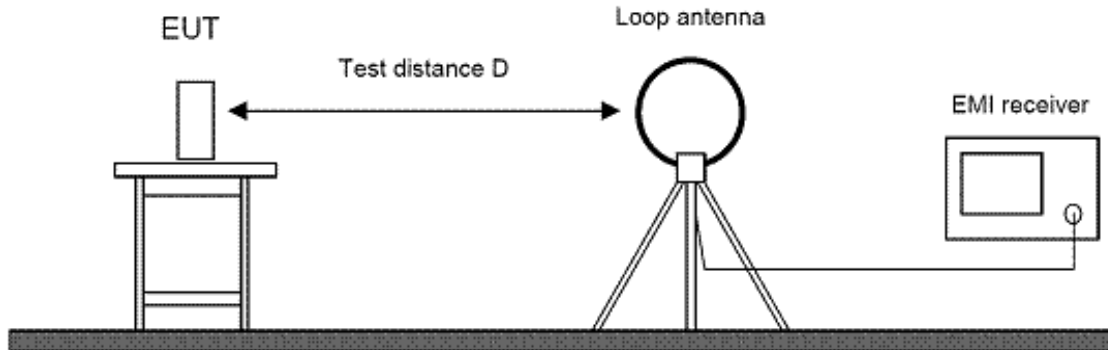


Figure 3: Setup for radiated emission test below 30 MHz

The test method for radiated emissions below 30 MHz refers to section 6.4 of ANSI C63.10 and shall be as follows:

1. EUT is configured according to ANSI C63.10. It is placed on the turntable 0.8 meter above ground. The receiving antenna is located 3 meters from the EUT. The test setup is placed inside a compact diagnostic chamber.
2. EUT and all peripherals are powered on.
3. The loop antenna is set in parallel with the antenna of the EUT.
4. The EMI receiver performs a scan from 9 kHz to 30 MHz with peak detector and measurement bandwidth set to 200 Hz for frequencies up to 150 kHz and 9 or 10 kHz for frequencies above.
5. The turn table is rotated to 8 different positions ($360^\circ / 8$).
6. The antenna is set in line with the antenna of the EUT and steps 4 and 5 are repeated.
7. Then the test setup is placed in an OATS with 3 m distance and all peak values over the limit or with less margin than 10 dB are marked and re-measured with a quasi-peak detector except for the frequency bands 9 to 90 kHz and 110 to 490 kHz, where average detector applies.
8. The turntable is rotated by 360 degrees to determine the position of the highest radiation.
9. The highest value for each frequency is recorded.

5.10.2 Radiated emissions from 30 MHz to 1 GHz

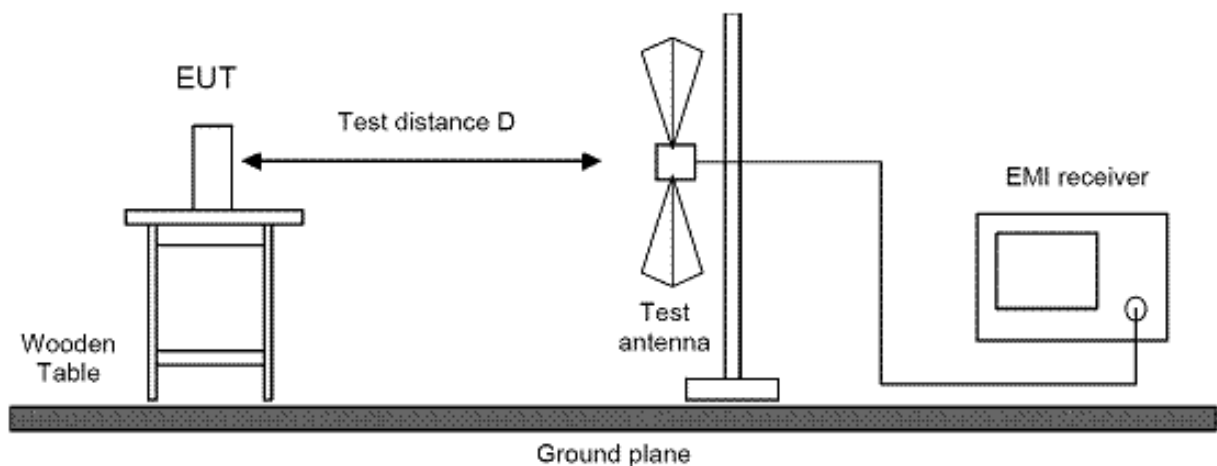


Figure 4: Setup for radiated emission test from 30 MHz to 1 GHz

The test method for radiated emissions from 30 MHz to 1 GHz refers to section 6.5 of ANSI C63.10 and shall be as follows:

1. EUT is configured according to ANSI C63.10. It is placed on the turntable 0.8 meter above ground. The receiving antenna is located 3 meters from the EUT. The test setup is placed inside a compact diagnostic chamber.
2. EUT and all peripherals are powered on.
3. The broadband antenna is set to vertical polarization.
4. The EMI receiver performs a scan from 30 MHz to 1000 MHz with peak detector and measurement bandwidth set to 120 kHz.
5. The turn table is rotated to 6 different positions ($360^\circ / 6$).
6. The antenna polarization is changed to horizontal and steps 4 and 5 are repeated.
7. Then the test setup is placed in an OATS at 3 m distance and all peak values over the limit or with less margin than 10 dB are marked and re-measured with a quasi-peak detector.
8. The turntable is rotated by 360 degrees to determine the position of the highest radiation.
9. The height of the broadband receiving antenna is varied between 1 meter and 4 meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
10. The highest value for each frequency is recorded.

5.10.3 Radiated emissions from above 1 GHz

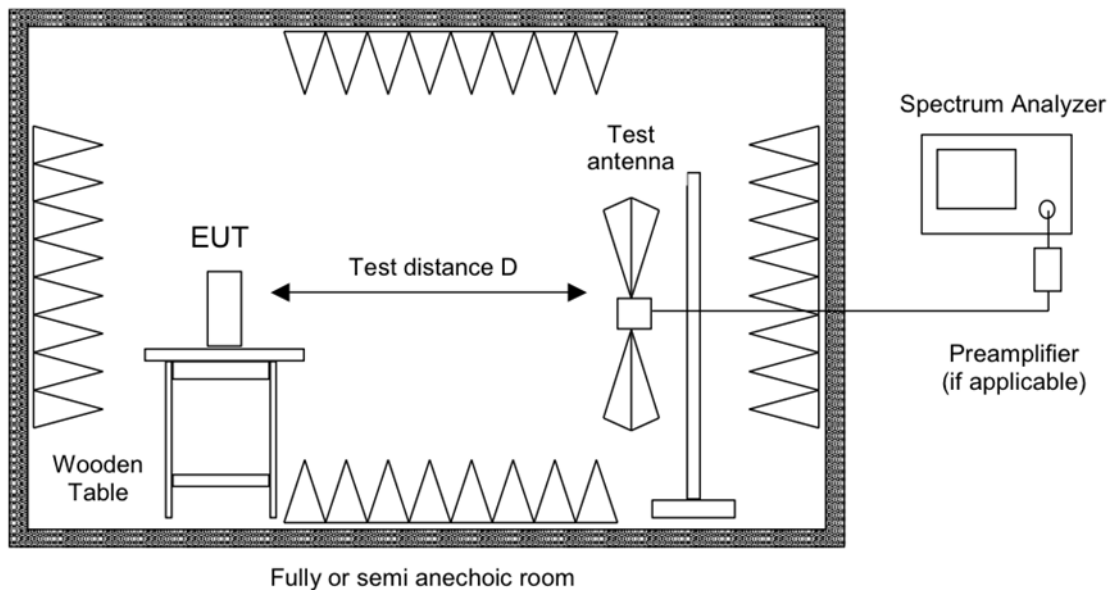


Figure 5: Setup for radiated emission test above 1 GHz

The test method for radiated emissions above 1 GHz refers to section 6.6 of ANSI C63.10 and shall be as follows:

1. EUT is configured according to ANSI C63.10. It is placed on the turntable 1.5 meter above ground. The test setup is placed inside a semi-anechoic chamber with RF absorbers on the floor.
2. EUT and all peripherals are powered on.
3. To identify the critical frequencies, extrapolatory radiated emission tests are performed at a closer distance than 3 meters (e.g. 1 meter). The critical frequencies found are noted.
4. For pre-scan the receiving antenna is located 3 meters from the EUT.
5. The broadband horn antenna is set to vertical polarization.
6. The EMI receiver performs a scan from 1 GHz to the 10th harmonic of the fundamental frequency with peak and average detector activated simultaneously and measurement bandwidth set to 1 MHz. The trace data is recorded using the max hold function.
7. The turntable is rotated in steps of 15°.
8. After a full turn by 360° the antenna polarization is changed to horizontal and steps 4 and 5 are repeated.
9. After the scan all peak values over the limit or with less margin than 10 dB are marked. If critical frequencies recorded during extrapolatory radiated emission tests are not contained, they are added to this list.
10. Emission levels at listed frequencies are maximized by moving the turntable and varying the antenna height until maximum of emission is found.
11. The turntable is rotated by 360 degrees to determine the position of the highest radiation.

12. The height of the broadband receiving antenna is varied between 1 meter and the upper height above ground to find the maximum emission field strength of both horizontal and vertical polarization. For equipment that is tested in multiple orientations, the upper height is limited to 2.5 meters or 0.5 meters above the top of the EUT, whichever is higher. For all other equipment the upper height is 4 meters.
13. The highest value for each frequency is recorded.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

DewertOkin GmbH
RF Gateway
Bluetooth RF-Gateway
(BLE mode)

6 Test results

This clause gives details about the test results as collected in the summary of test results on page 6.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

DewertOkin GmbH
RF Gateway
Bluetooth RF-Gateway
(BLE mode)

6.1 AC power line conducted emissions 150 kHz to 30 MHz

47 CFR part and section: 15.207
 Equivalent to IC radio standard(s): RSS-Gen Issue 4, section 8.8
 Measurement procedure: See 5.1

Performed by: Martin Müller Date of test: February 20, 2017

Result Test passed Test not passed

6.1.1 Test equipment

| Type | Designation | Manufacturer | Inventory no. |
|--|--------------|--------------------|---------------|
| <input checked="" type="checkbox"/> Shielded room | P92007 | Siemens Matsushita | E00107 |
| <input type="checkbox"/> EMI test receiver | ESCI 3 | Rohde & Schwarz | E00001 |
| <input type="checkbox"/> EMI test receiver | ESU 26 | Rohde & Schwarz | W00002 |
| <input checked="" type="checkbox"/> EMI test receiver | ESCS 30 | Rohde & Schwarz | E00003 |
| <input checked="" type="checkbox"/> Artificial mains network | ESH2-Z5 | Rohde & Schwarz | E00004 |
| <input type="checkbox"/> Artificial mains network | ESH2-Z5 | Rohde & Schwarz | E00005 |
| <input checked="" type="checkbox"/> Attenuator (10 dB) | 50FHB-010-10 | JFW Industries | E00471 |
| <input checked="" type="checkbox"/> Measurement software | E10 | ib comPLAN | E00443 |

6.1.2 Limits

| Frequency [MHz] | Quasi-peak [dB μ V] | Average [dB μ V] |
|-----------------|-------------------------|----------------------|
| 0.15 – 0.5 | 66 – 56 | 56 – 46 |
| 0.5 – 5.0 | 56 | 46 |
| 5 – 30 | 60 | 50 |



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

DewertOkin GmbH
 RF Gateway
Bluetooth RF-Gateway
 (BLE mode)

6.1.3 Test results


| Frequency range | Step size | IF Bandwidth | Detector | | Measurement Time | | Preamplifier |
|------------------|-----------|--------------|----------|------------|------------------|------------|--------------|
| | | | Prescan | Final scan | Prescan | Final scan | |
| 150 kHz – 30 MHz | 4 kHz | 9 kHz | PK | AV | 1 ms | 1 s | off |
| 150 kHz – 30 MHz | 4 kHz | 9 kHz | PK | QPK | 1 ms | 1 s | off |



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

DewertOkin GmbH
 RF Gateway
Bluetooth RF-Gateway
 (BLE mode)

Interference Voltage Test

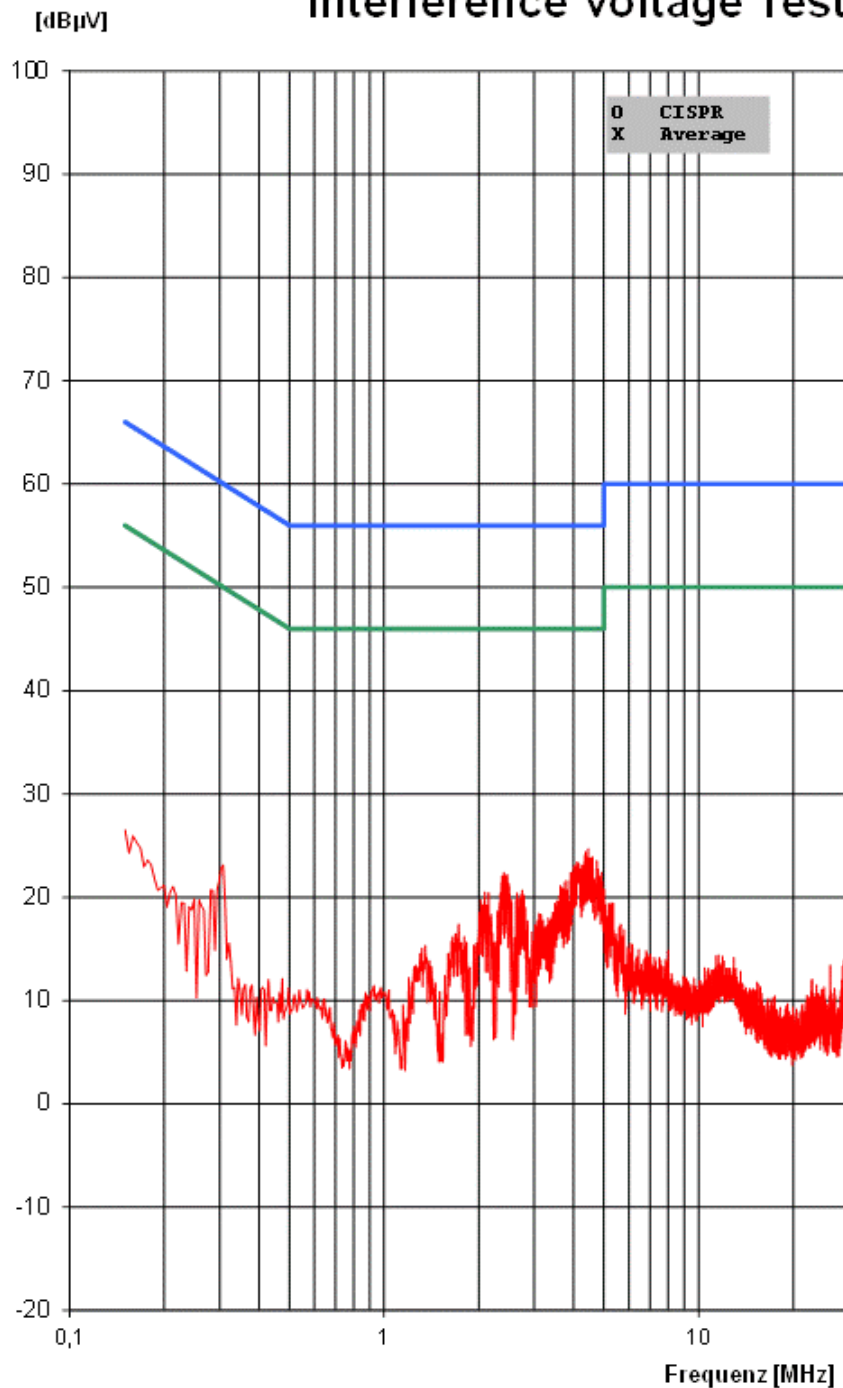

REGULATIONS:
47 CFR, 15.207
PEAK / CISPR / AV

TEST EQUIPMENT:
R&S ESCS30 (E00003)
R&S ESH2-Z5 (E00004)

ORDER NO.:
160583-AU01+W04

EUT:
DewertOkin GmbH
Gateway
RF-Gateway
D123456 0001

OPERATION MODE:
BLE mode

Mains 120V AC /60Hz
Phase

TEST FACILITY:
EMV TESTHAUS GmbH
Gustav-Hertz-Straße 35
94315 Straubing

DATE / TIME:
2017-02-20 09:31:05
24°C 26% 98kPa

TEST ENGINEER:
Martin Müller

StoSp_L1.E10


Figure 6: Chart of AC power line conducted emissions test 150 kHz to 30 MHz – phase L1



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

DewertOkin GmbH
RF Gateway
Bluetooth RF-Gateway
(BLE mode)

Interference Voltage Test

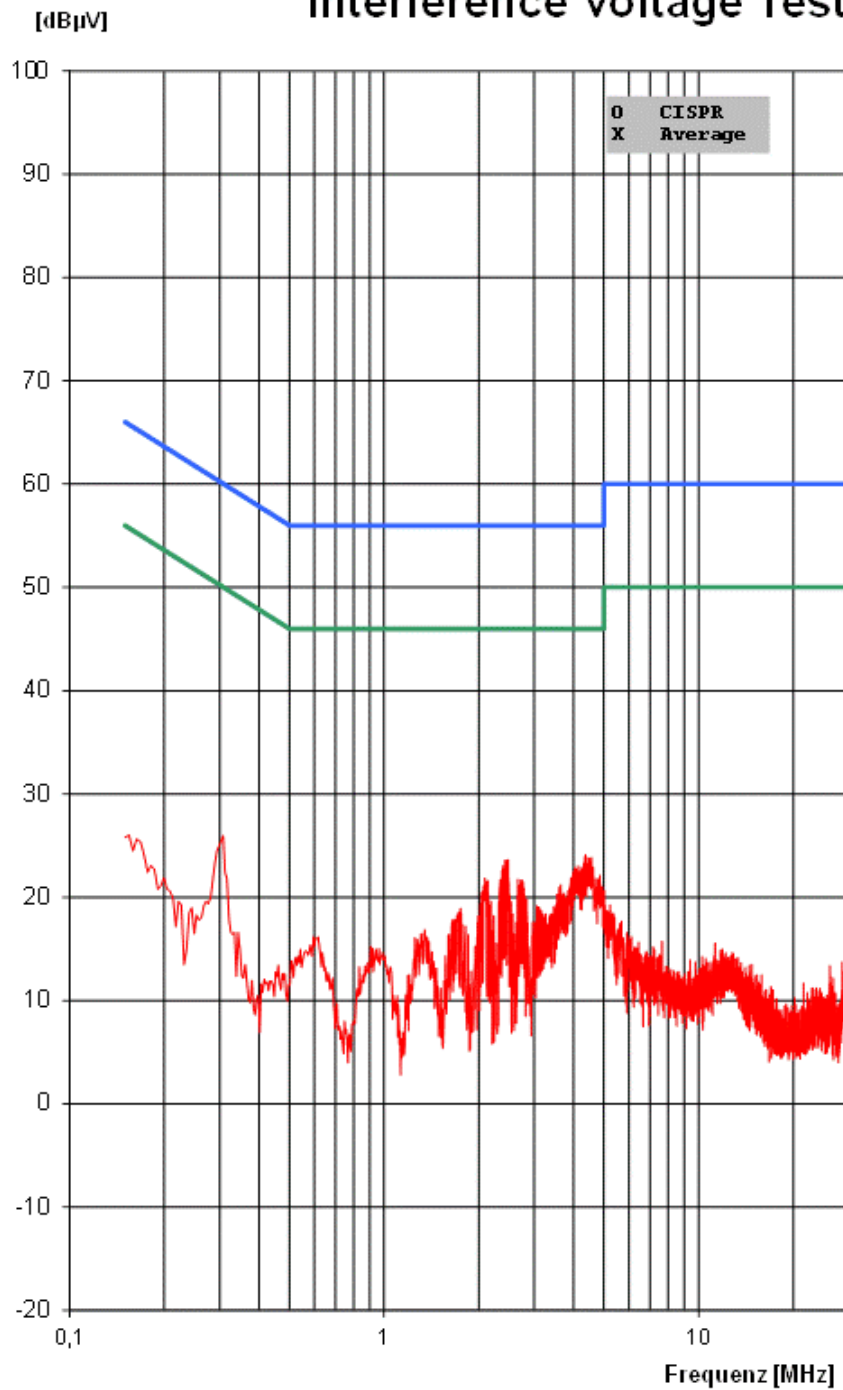

REGULATIONS:
47 CFR, 15.207
PEAK / CISPR / AV

TEST EQUIPMENT:
R&S ESCS30 (E00003)
R&S ESH2-Z5 (E00004)

ORDER NO.:
160583-AU01+W04

EUT:
DewertOkin GmbH
Gateway
RF-Gateway
D123456 0001

OPERATION MODE:
BLE mode

Mains 120V AC /60Hz
Neutral

TEST FACILITY:
EMV TESTHAUS GmbH
Gustav-Hertz-Straße 35
94315 Straubing

DATE / TIME:
2017-02-20 09:31:05
24°C 26% 98kPa

TEST ENGINEER:
Martin Müller

StoSp_N.E10

Figure 7: Chart of AC power line conducted emissions test 150 kHz to 30 MHz – phase N



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

DewertOkin GmbH
RF Gateway
Bluetooth RF-Gateway
(BLE mode)

6.2 20 dB bandwidth

47 CFR part and section: 15.247(a)(1)
Equivalent to IC radio standard(s): RSS-247 Issue 2, section 5.1(b)
Measurement procedure: See 5.2

Performed by: Martin Müller Date of test: February 13, 2017

Result Test passed Test not passed

6.2.1 Test equipment

| Type | Designation | Manufacturer | Inventory no. |
|--|-------------|-----------------|---------------|
| <input checked="" type="checkbox"/> Laboratory environment | --- | --- | --- |
| <input type="checkbox"/> EMI test receiver | ESCI 3 | Rohde & Schwarz | E00001 |
| <input checked="" type="checkbox"/> EMI test receiver | ESU 26 | Rohde & Schwarz | W00002 |

6.2.2 Limits for digital transmission systems

None -> results recorded for information only.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

DewertOkin GmbH
RF Gateway
Bluetooth RF-Gateway
(BLE mode)

6.2.3 Test results

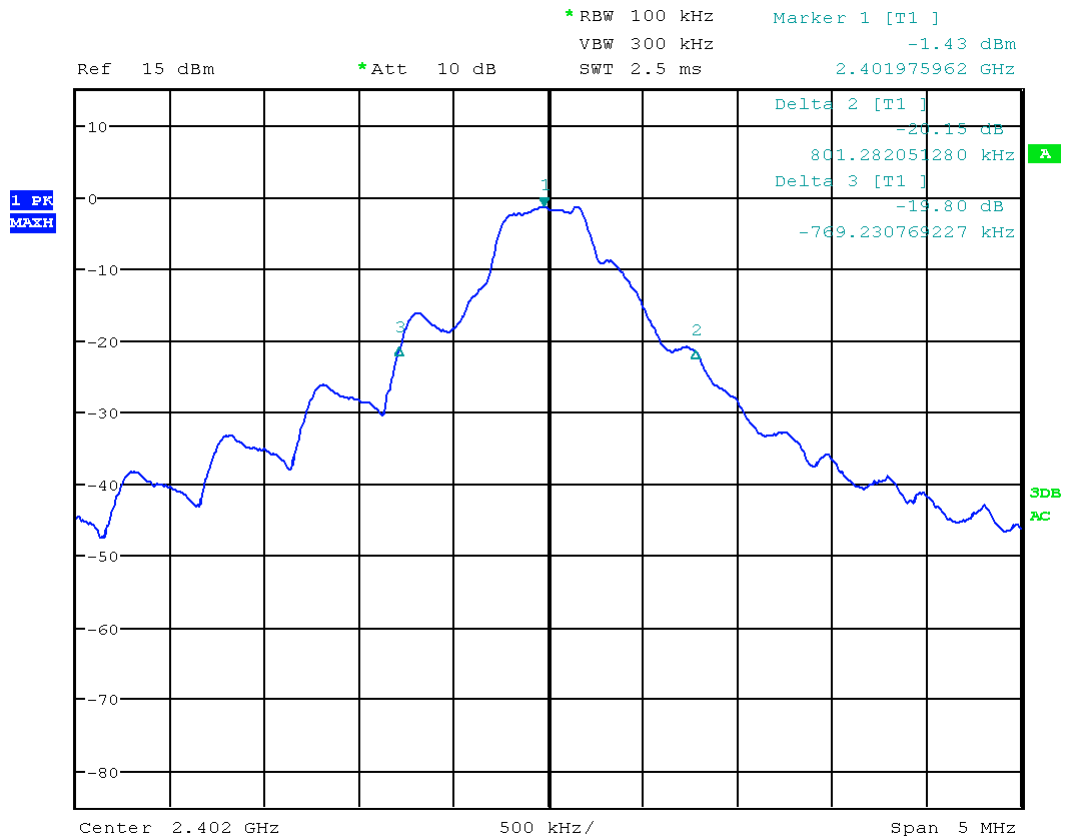


Figure 8: Chart of 20 dB bandwidth test, channel low

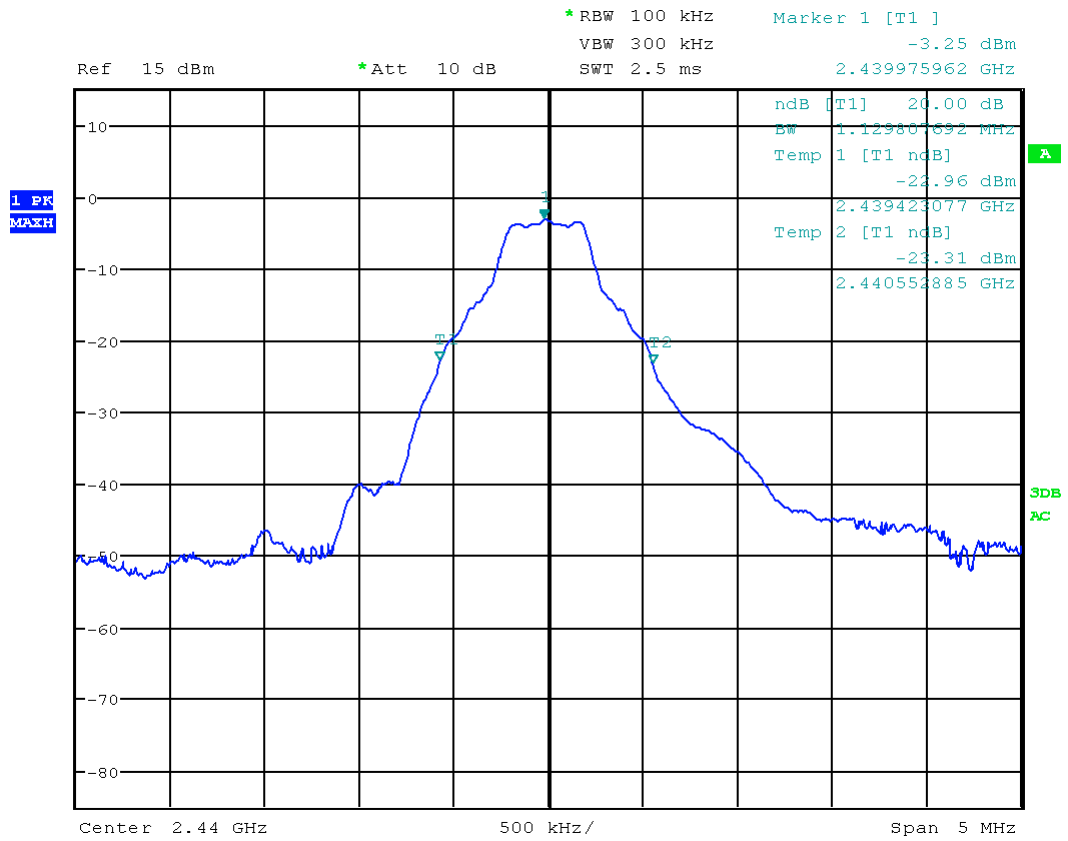


Figure 9: Chart of 20 dB bandwidth test, channel mid



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

DewertOkin GmbH
 RF Gateway
Bluetooth RF-Gateway
 (BLE mode)

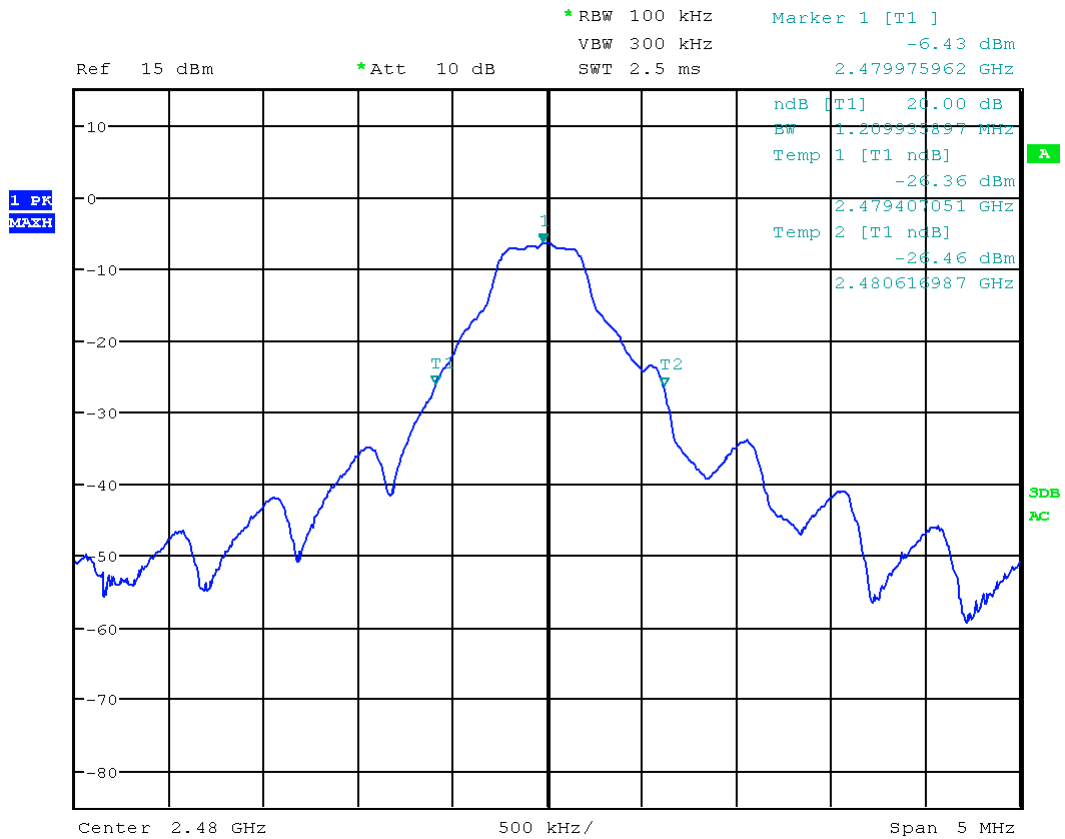


Figure 10: Chart of 20 dB bandwidth test, channel high

| f [MHz] | 20dB-BW [MHz] | f _{lower} [MHz] | f _{upper} [MHz] | Lower band edge [MHz] | Upper band edge [MHz] | Result |
|----------|---------------|--------------------------|--------------------------|-----------------------|-----------------------|-------------|
| 2401.976 | 1.570 | 2401.207 | 2402.777 | 2400.0 | 2483.5 | within band |
| 2439.976 | 1.130 | 2439.423 | 2440.553 | 2400.0 | 2483.5 | within band |
| 2479.976 | 1.210 | 2479.407 | 2480.617 | 2400.0 | 2483.5 | within band |

Table 4: Final results of 20 dB bandwidth test



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

DewertOkin GmbH
 RF Gateway
Bluetooth RF-Gateway
 (BLE mode)

6.3 6 dB bandwidth

47 CFR part and section: 15.247(a)(2)
Equivalent to IC radio standard(s): RSS-247 Issue 2, section 5.2(a)
Measurement procedure: See 5.3

Performed by: Martin Müller Date of test: February 13, 2017

Result: Test passed Test not passed

6.3.1 Test equipment

| Type | Designation | Manufacturer | Inventory no. |
|--|-------------|-----------------|---------------|
| <input checked="" type="checkbox"/> Laboratory environment | --- | --- | --- |
| <input type="checkbox"/> EMI test receiver | ESCI 3 | Rohde & Schwarz | E00001 |
| <input checked="" type="checkbox"/> EMI test receiver | ESU 26 | Rohde & Schwarz | W00002 |

6.3.2 Limits for digital transmission systems

The minimum 6 dB bandwidth shall be at least 500 kHz.
In addition 6 dB bandwidth must be contained within the designated frequency band.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

DewertOkin GmbH
RF Gateway
Bluetooth RF-Gateway
(BLE mode)

6.3.3 Test results

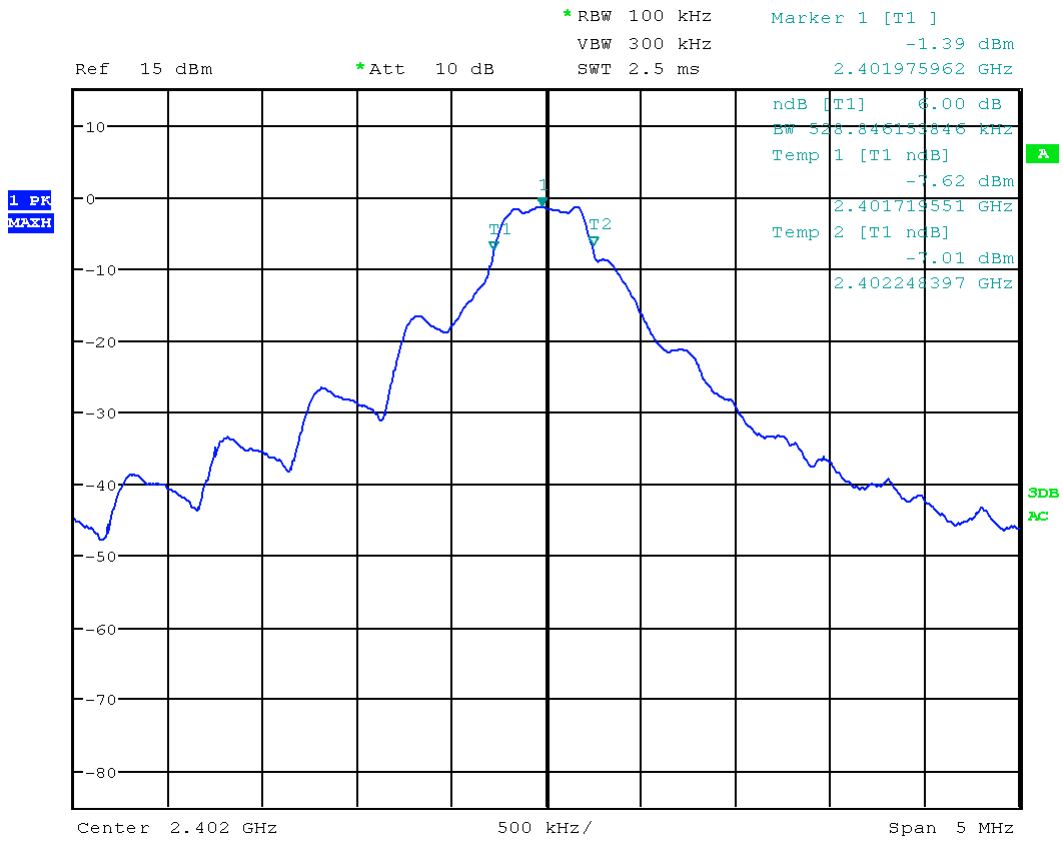


Figure 11: Chart of 6 dB bandwidth test, channel low



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

DewertOkin GmbH
 RF Gateway
Bluetooth RF-Gateway
 (BLE mode)

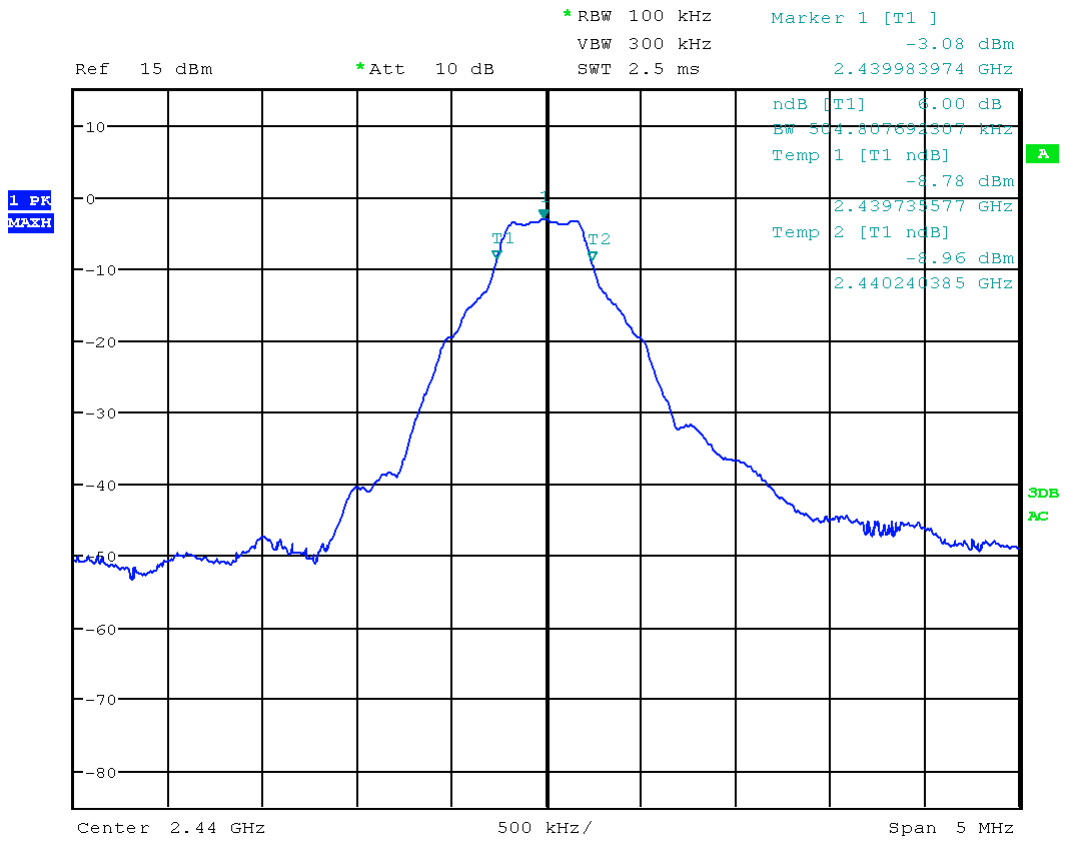


Figure 12: Chart of 6 dB bandwidth test, channel mid

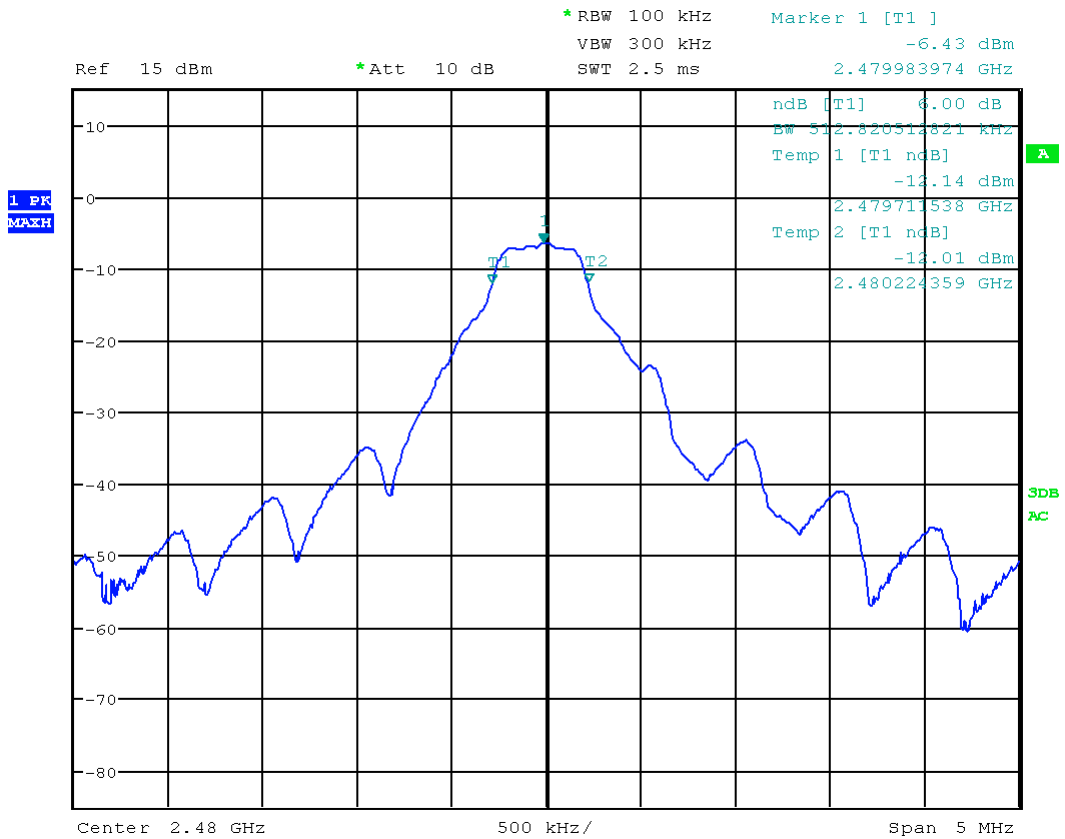


Figure 13: Chart of 6 dB bandwidth test, channel high

| f [MHz] | 6dB-BW [MHz] | f _{lower} [MHz] | f _{upper} [MHz] | Lower band edge [MHz] | Upper band edge [MHz] | Result |
|----------|--------------|--------------------------|--------------------------|-----------------------|-----------------------|--------|
| 2401.976 | 0.529 | 2401.720 | 2402.248 | 2400.0 | 2483.5 | Pass |
| 2439.984 | 0.505 | 2439.736 | 2440.240 | 2400.0 | 2483.5 | Pass |
| 2479.984 | 0.513 | 2479.712 | 2480.224 | 2400.0 | 2483.5 | Pass |

Table 5: Final results of 6 dB bandwidth test



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

DewertOkin GmbH
 RF Gateway
Bluetooth RF-Gateway
 (BLE mode)

6.4 Occupied bandwidth

47 CFR part and section: 2.202(a)
Equivalent to IC radio standard(s): RSS-Gen Issue 4, section 6.6
Measurement procedure: See 5.4

Performed by: Martin Müller Date of test: February 14, 2017

Result Test passed Test not passed

6.4.1 Test equipment

| Type | Designation | Manufacturer | Inventory no. |
|--|-------------|-----------------|---------------|
| <input checked="" type="checkbox"/> Laboratory environment | --- | --- | --- |
| <input type="checkbox"/> EMI test receiver | ESCI 3 | Rohde & Schwarz | E00001 |
| <input checked="" type="checkbox"/> EMI test receiver | ESU 26 | Rohde & Schwarz | W00002 |

6.4.2 Limits

None -> results recorded for setting the proper reference level.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

DewertOkin GmbH
RF Gateway
Bluetooth RF-Gateway
(BLE mode)

6.4.3 Test results

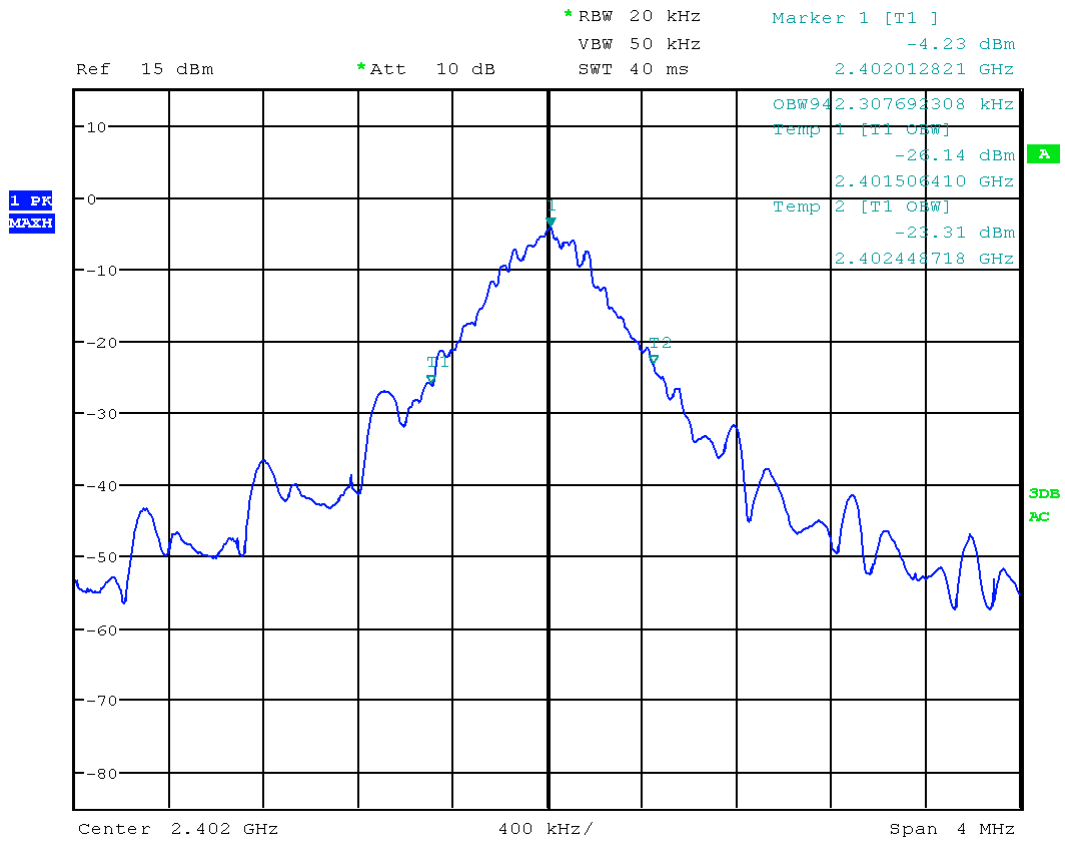


Figure 14: Chart of occupied bandwidth test, channel low

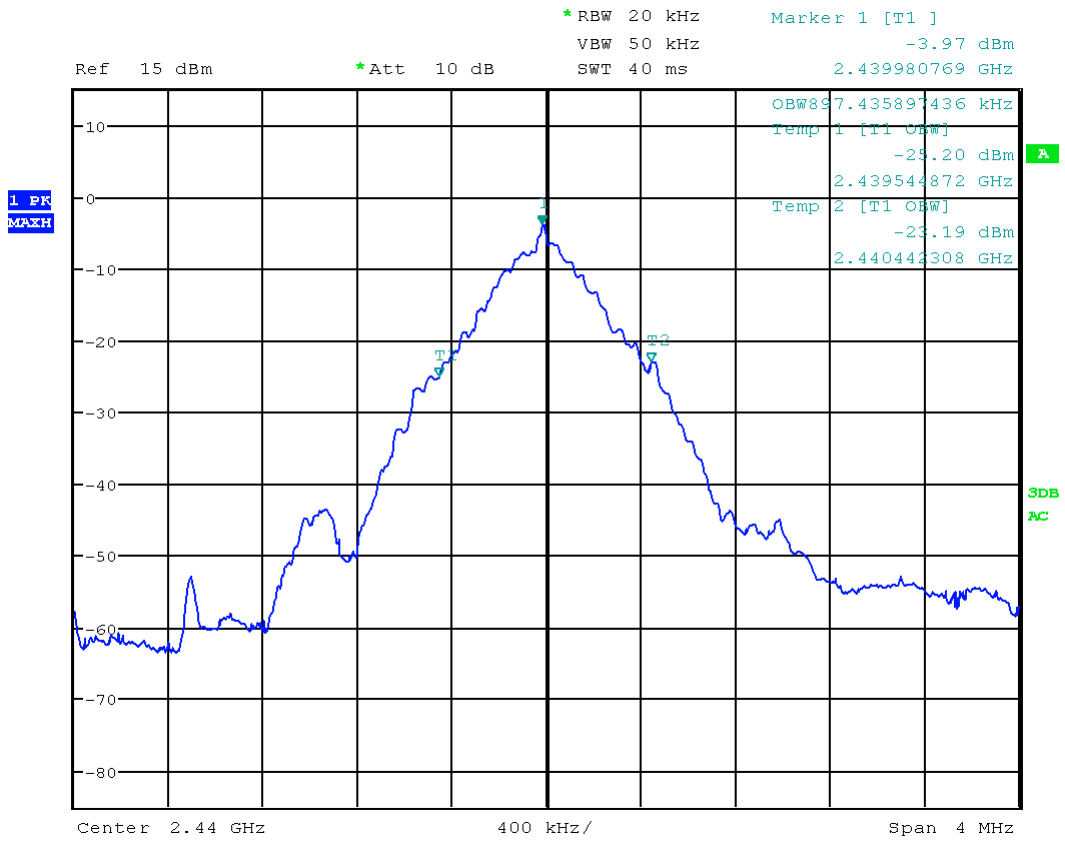


Figure 15: Chart of occupied bandwidth test, channel mid

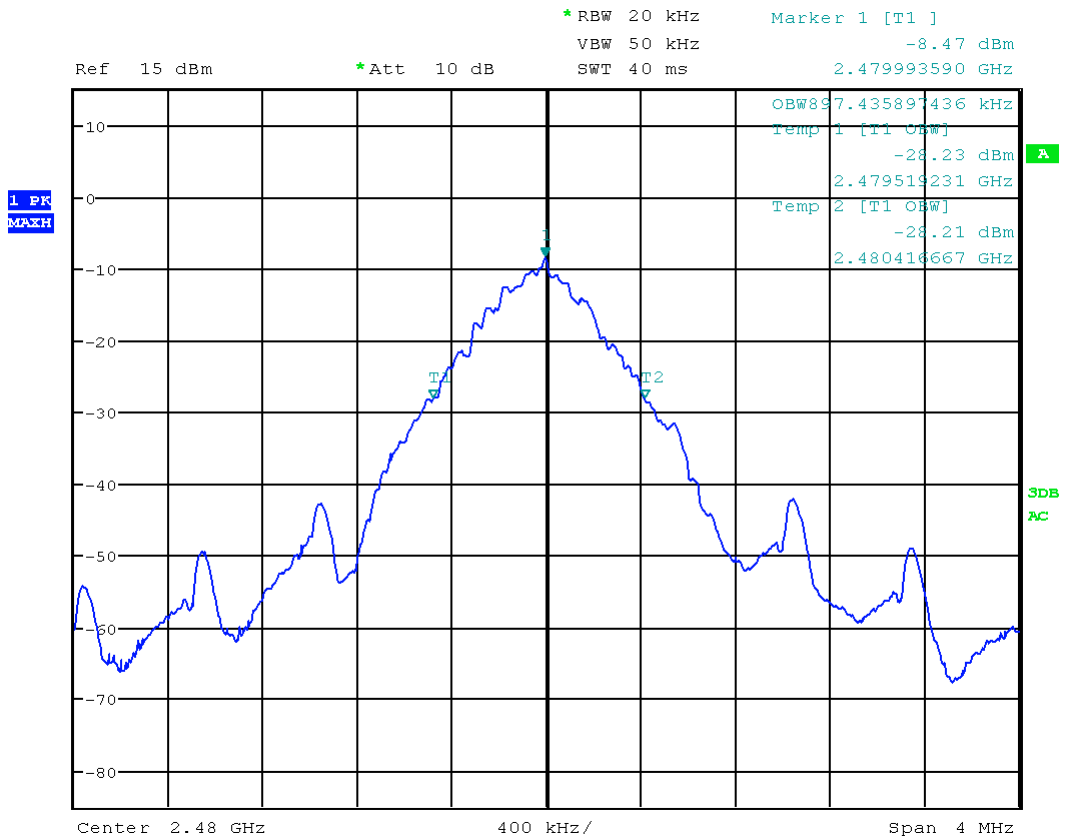


Figure 16: Chart of occupied bandwidth test, channel high

| f [MHz] | Occ. BW [MHz] | f _{lower} [MHz] | f _{upper} [MHz] | Lower band edge [MHz] | Upper band edge [MHz] | Result |
|----------|---------------|--------------------------|--------------------------|-----------------------|-----------------------|-------------|
| 2402.013 | 0.942 | 2401.506 | 2402.449 | 2400.0 | 2483.5 | within band |
| 2439.981 | 0.897 | 2439.545 | 2440.442 | 2400.0 | 2483.5 | within band |
| 2479.994 | 0.897 | 2479.520 | 2480.417 | 2400.0 | 2483.5 | within band |

Table 6: Final results of occupied bandwidth test



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

DewertOkin GmbH
 RF Gateway
Bluetooth RF-Gateway
 (BLE mode)

6.5 Maximum conducted output power

47 CFR part and section: 15.247(b)
Equivalent to IC radio standard(s): RSS-Gen Issue 4, section 6.12
RSS-247 Issue 2, section 5.4
Measurement procedure: See 5.5

Performed by: Martin Müller Date of test: February 14, 2017

Result Test passed Test not passed

6.5.1 Test equipment

| Type | Designation | Manufacturer | Inventory no. |
|--|-------------|-----------------|---------------|
| <input checked="" type="checkbox"/> Laboratory environment | --- | --- | --- |
| <input type="checkbox"/> EMI test receiver | ESCI 3 | Rohde & Schwarz | E00001 |
| <input checked="" type="checkbox"/> EMI test receiver | ESU 26 | Rohde & Schwarz | W00002 |

6.5.2 Limits for digital transmission systems

1 watt (30 dBm).



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

DewertOkin GmbH
RF Gateway
Bluetooth RF-Gateway
(BLE mode)

6.5.3 Test results

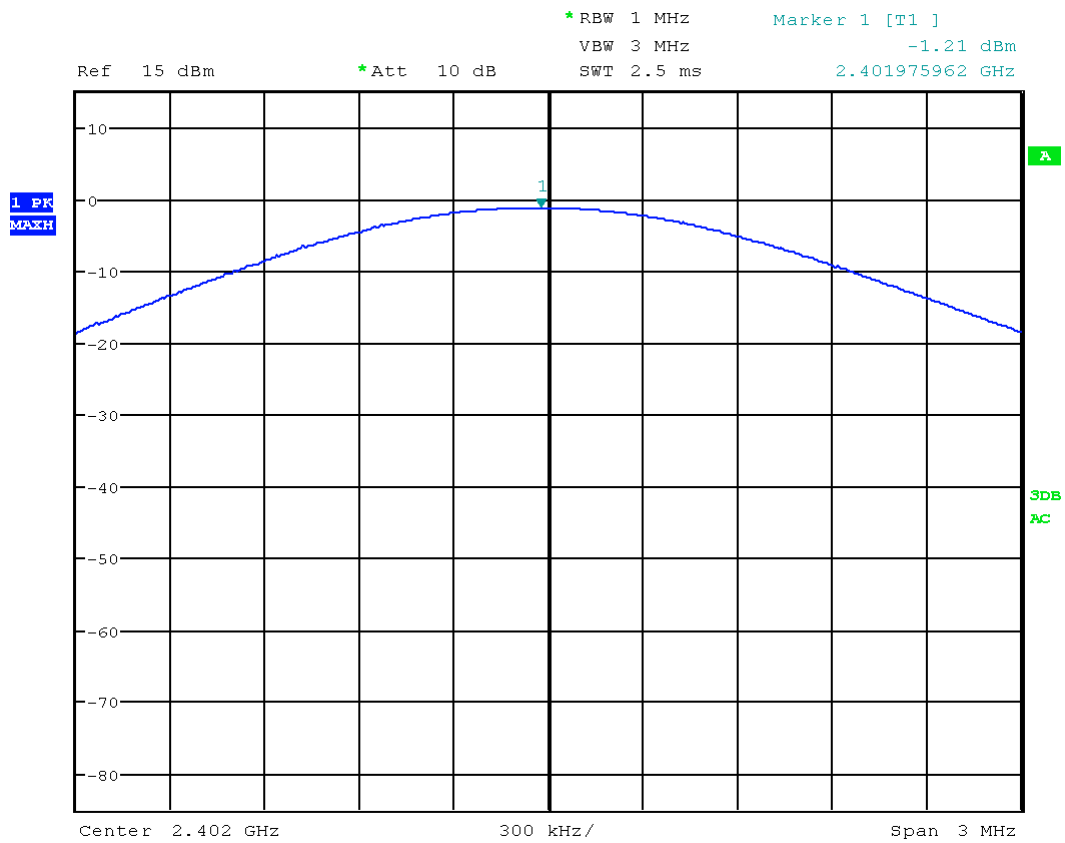


Figure 17: Chart of maximum conducted output power test, channel low



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

DewertOkin GmbH
 RF Gateway
Bluetooth RF-Gateway
 (BLE mode)

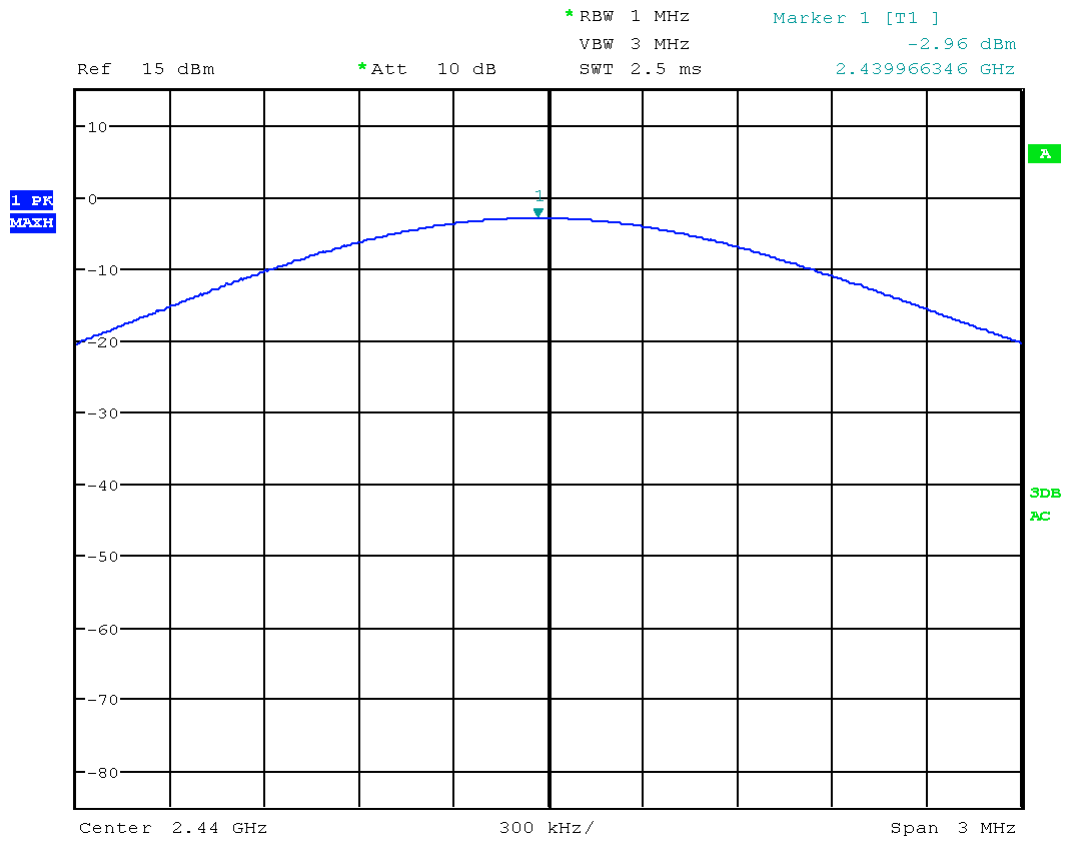


Figure 18: Chart of maximum conducted output power test, channel mid

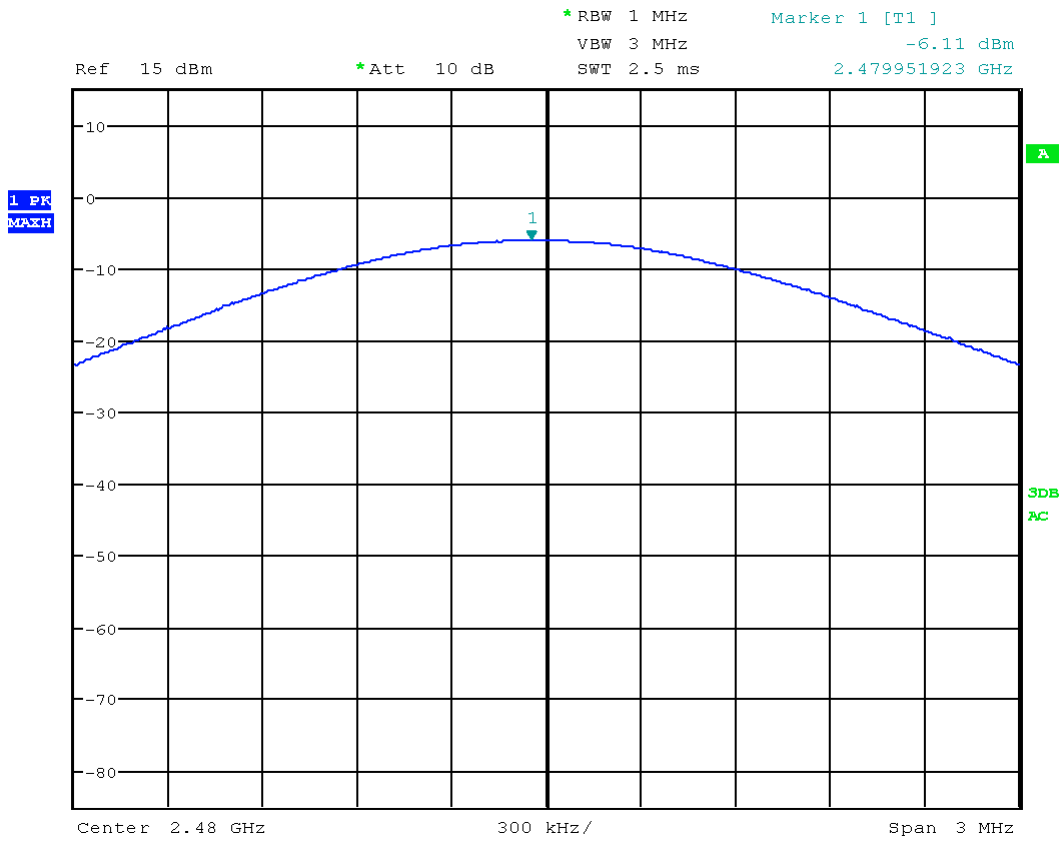


Figure 19: Chart of maximum conducted output power test, channel high

| f [MHz] | P _{meas} [dBm] | a _{testcable} [dB] | Maximum conducted output power [dBm] | Limit [dBm] | Result |
|----------|-------------------------|-----------------------------|--------------------------------------|-------------|--------|
| 2401.976 | -1.21 | 0.54 | -0.67 | 30.0 | Pass |
| 2439.966 | -2.96 | 0.55 | -2.41 | 30.0 | Pass |
| 2479.952 | -6.11 | 0.55 | -5.56 | 30.0 | Pass |

Table 7: Final results of maximum conducted output power test

6.6 Power spectral density

47 CFR part and section: 15.247(e)
Equivalent to IC radio standard(s): RSS-247 Issue 2, section 5.2(b)
Measurement procedure: See 5.6

Performed by: Martin Müller Date of test: February 14, 2017

Result Test passed Test not passed

6.6.1 Test equipment

| Type | Designation | Manufacturer | Inventory no. |
|--|-------------|-----------------|---------------|
| <input checked="" type="checkbox"/> Laboratory environment | --- | --- | --- |
| <input type="checkbox"/> EMI test receiver | ESCI 3 | Rohde & Schwarz | E00001 |
| <input checked="" type="checkbox"/> EMI test receiver | ESU 26 | Rohde & Schwarz | W00002 |

6.6.2 Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

DewertOkin GmbH
RF Gateway
Bluetooth RF-Gateway
(BLE mode)

6.6.3 Test results

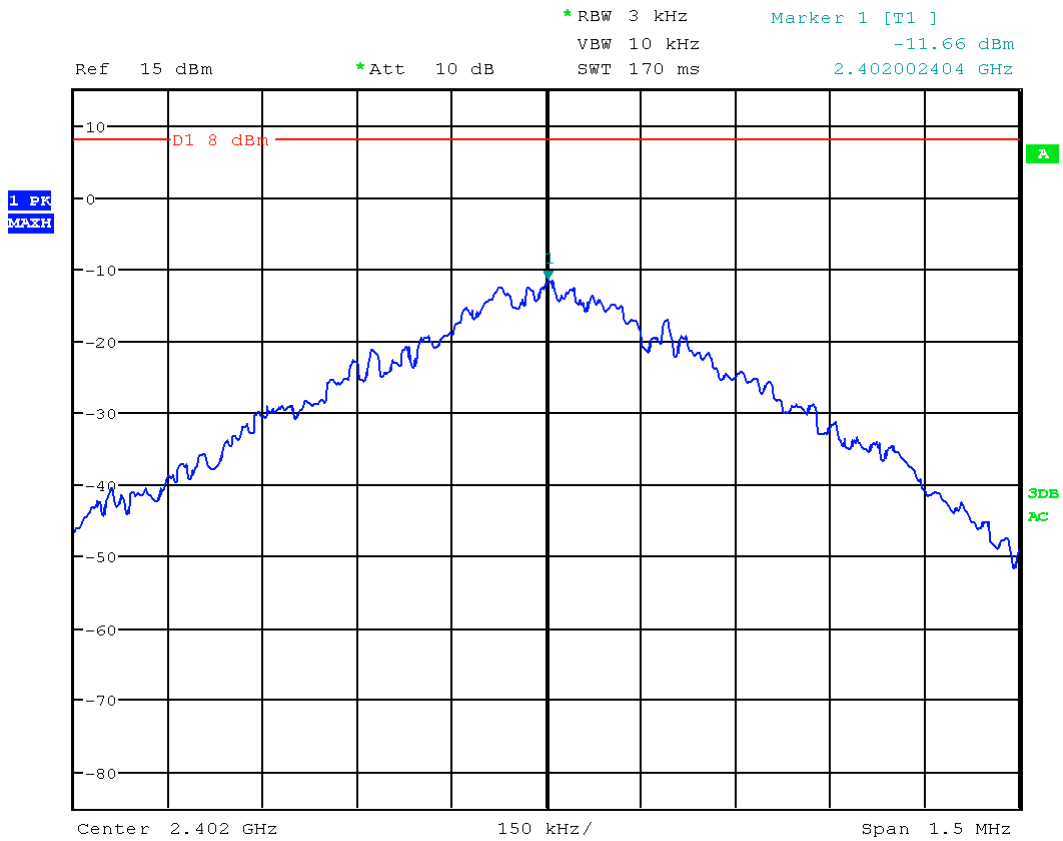


Figure 20: Chart of power spectral density test, channel low - complete carrier

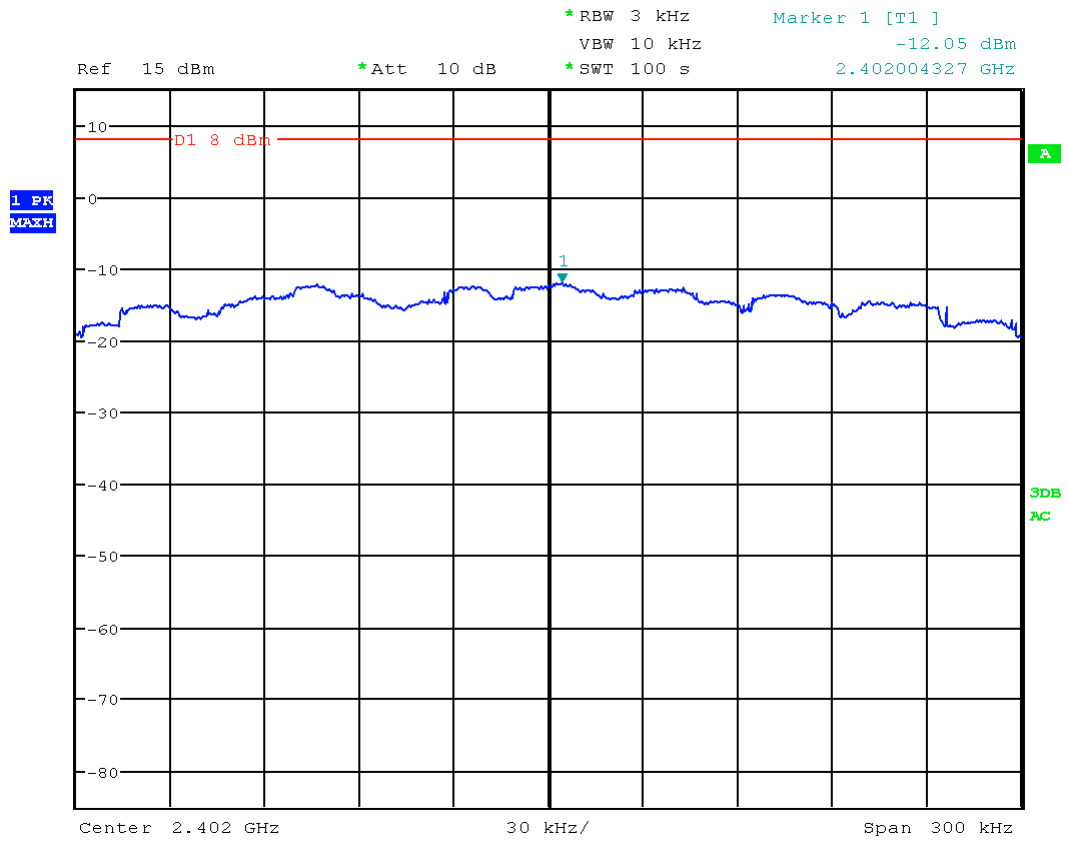


Figure 21: Chart of power spectral density test, channel low - zoom to maximum

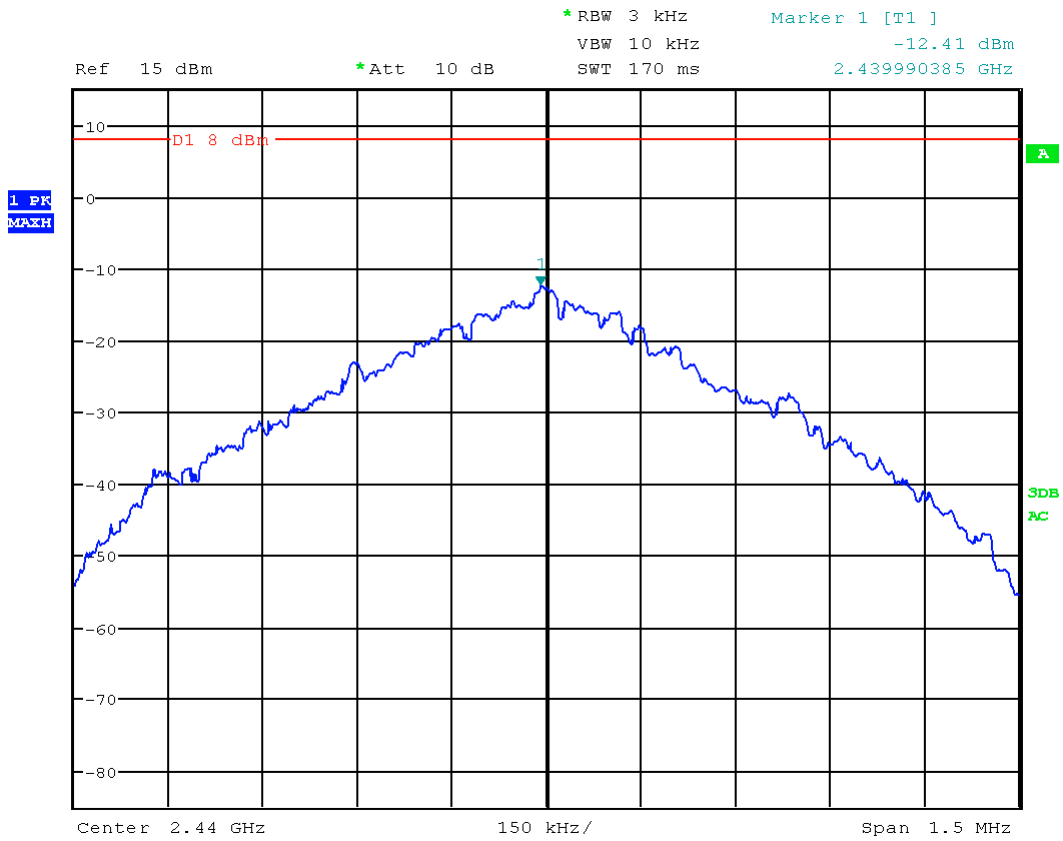


Figure 22: Chart of power spectral density test, channel mid - complete carrier

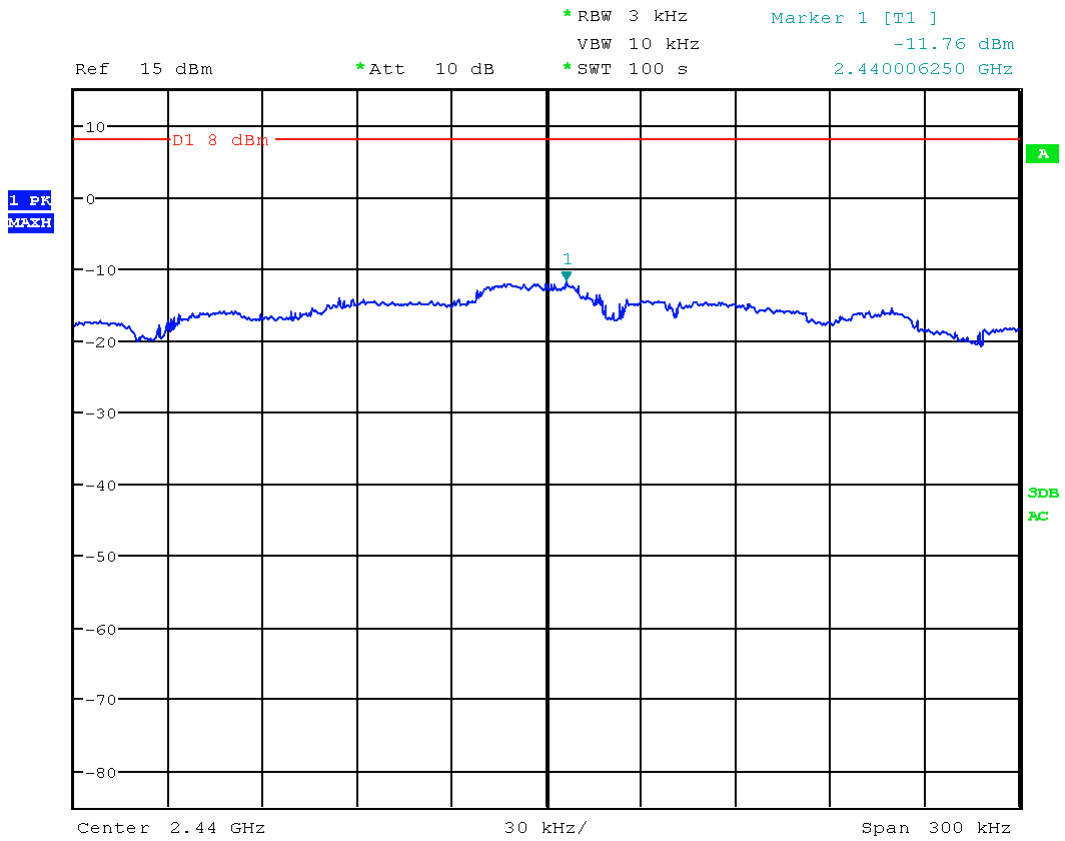


Figure 23: Chart of power spectral density test, channel mid - zoom to maximum



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

DewertOkin GmbH
 RF Gateway
Bluetooth RF-Gateway
 (BLE mode)

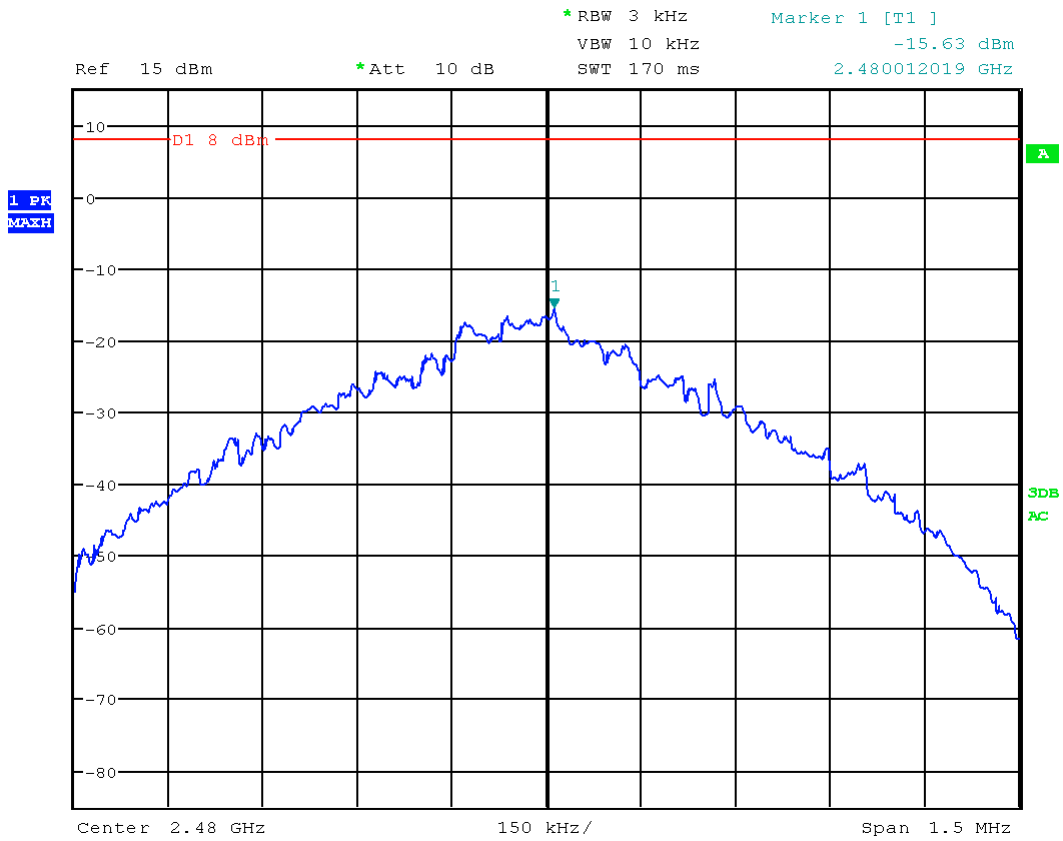


Figure 24: Chart of power spectral density test, channel high - complete carrier



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

DewertOkin GmbH
 RF Gateway
Bluetooth RF-Gateway
 (BLE mode)

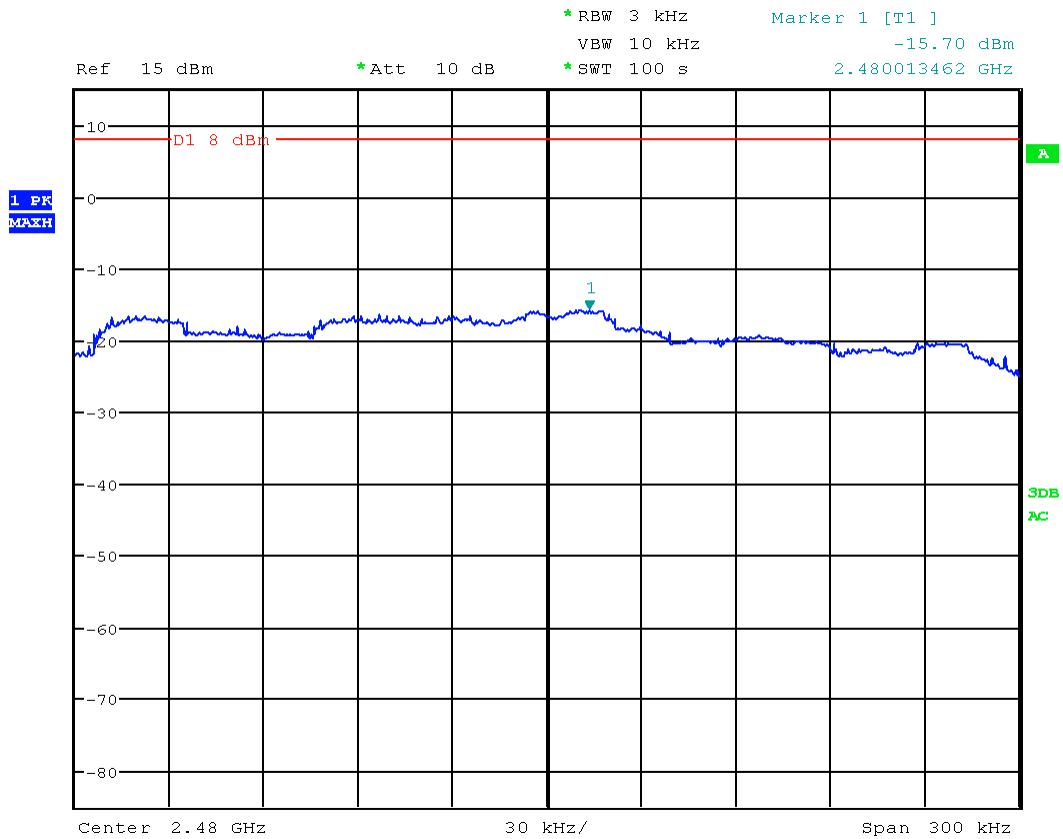


Figure 25: Chart of power spectral density test, channel high - zoom to maximum

| f [MHz] | P _{meas} [dBm] | a _{testcable} [dB] | Power spectral density [dBm / 3 kHz] | Limit [dBm / 3 kHz] | Result |
|----------|-------------------------|-----------------------------|--------------------------------------|---------------------|--------|
| 2402.002 | -11.66 | 0.54 | -11.12 | 8.0 | Pass |
| 2440.006 | -11.76 | 0.55 | -11.21 | 8.0 | Pass |
| 2480.012 | -15.63 | 0.55 | -15.08 | 8.0 | Pass |

Table 8: Final results of power spectral density test

6.7 Band-edge compliance (radiated)

47 CFR part and section: 15.247(d)
 Equivalent to IC radio standard(s): RSS-247 Issue 2, section 5.5
 Measurement procedure: See 5.7

Performed by: Martin Müller Date of test: February 16, 2017

Result Test passed Test not passed

6.7.1 Test equipment

| Type | Designation | Manufacturer | Inventory no. |
|---|-----------------|--------------------------|---------------|
| <input type="checkbox"/> Compact Diagnostic Chamber (CDC) | VK041.0174 | Albatross Projects | E00026 |
| <input type="checkbox"/> Open Area Test Site (OATS) | --- | EMV TESTHAUS GmbH | E00354 |
| <input type="checkbox"/> Semi Anechoic Chamber (SAC) | --- | Albatross Projects | E00716 |
| <input checked="" type="checkbox"/> Anechoic Chamber (AC) | --- | EMV TESTHAUS GmbH | E00100 |
| <input type="checkbox"/> EMI test receiver (CDC) | ESCI 3 | Rohde & Schwarz | E00001 |
| <input type="checkbox"/> EMI test receiver | ESU 26 | Rohde & Schwarz | W00002 |
| <input type="checkbox"/> EMI test receiver (SAC) | ESR 7 | Rohde & Schwarz | E00739 |
| <input type="checkbox"/> EMI test receiver (OATS) | ESCI 3 | Rohde & Schwarz | E00552 |
| <input checked="" type="checkbox"/> EMI test receiver | ESW 44 | Rohde & Schwarz | E00895 |
| <input type="checkbox"/> Preamplifier | AMF-5D-00501800 | Miteq | W00089 |
| <input type="checkbox"/> Preamplifier | AMF-6F-16002650 | Miteq | W00090 |
| <input type="checkbox"/> Loop antenna | HFH2-Z2 | Rohde & Schwarz | E00060 |
| <input type="checkbox"/> TRILOG broadband antenna (CDC) | VULB 9160 | Schwarzbeck | E00011 |
| <input type="checkbox"/> TRILOG broadband antenna (OATS) | VULB 9163 | Schwarzbeck | E00013 |
| <input type="checkbox"/> TRILOG broadband antenna (SAC) | VULB 9162 | Schwarzbeck | E00643 |
| <input type="checkbox"/> Horn antenna | BBHA 9120D | Schwarzbeck | W00052 |
| <input checked="" type="checkbox"/> Horn antenna | BBHA 9120D | Schwarzbeck | W00053 |
| <input type="checkbox"/> Horn antenna | BBHA 9170 | Schwarzbeck | W00055 |
| <input type="checkbox"/> Measurement software | E10 | ib comPLAN | E00443 |
| <input type="checkbox"/> Measurement software | EMC 32 | Rohde & Schwarz | E00777 |



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

DewertOkin GmbH
 RF Gateway
Bluetooth RF-Gateway
 (BLE mode)

6.7.2 Limits

- < -20 dBc outside restricted bands
- < 54 dB μ V/m (average detector) inside restricted bands
- < 74 dB μ V/m (peak detector) inside restricted bands



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

DewertOkin GmbH
RF Gateway
Bluetooth RF-Gateway
(BLE mode)

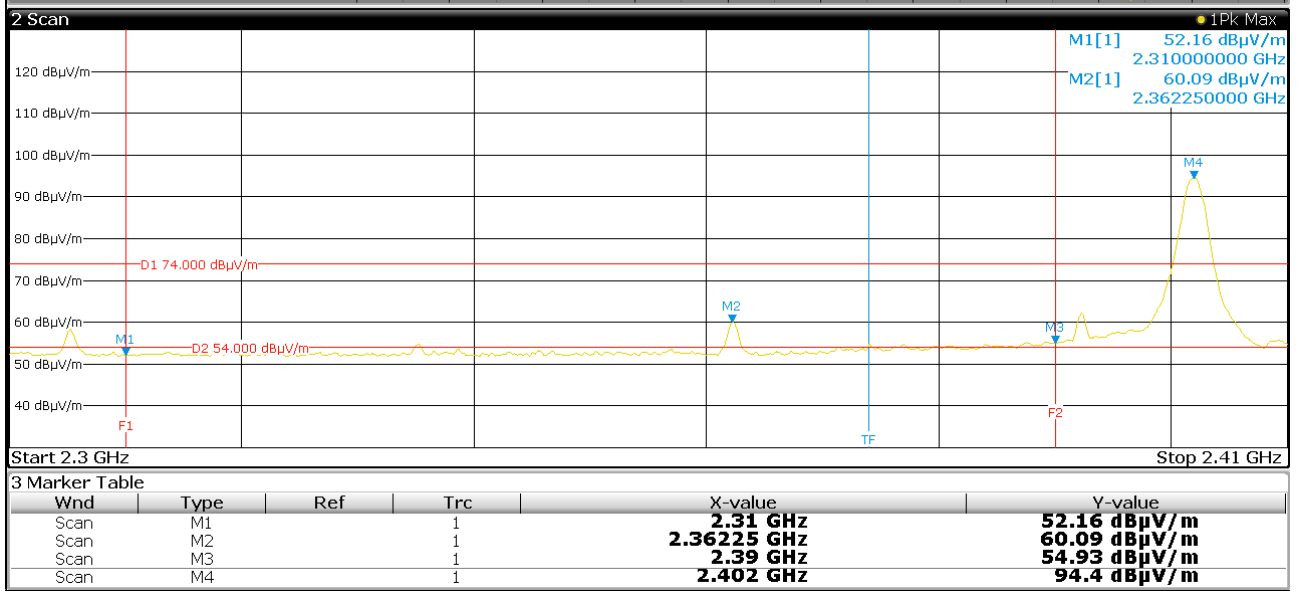


Figure 26: Chart of band edge compliance test, lower band edge - PK

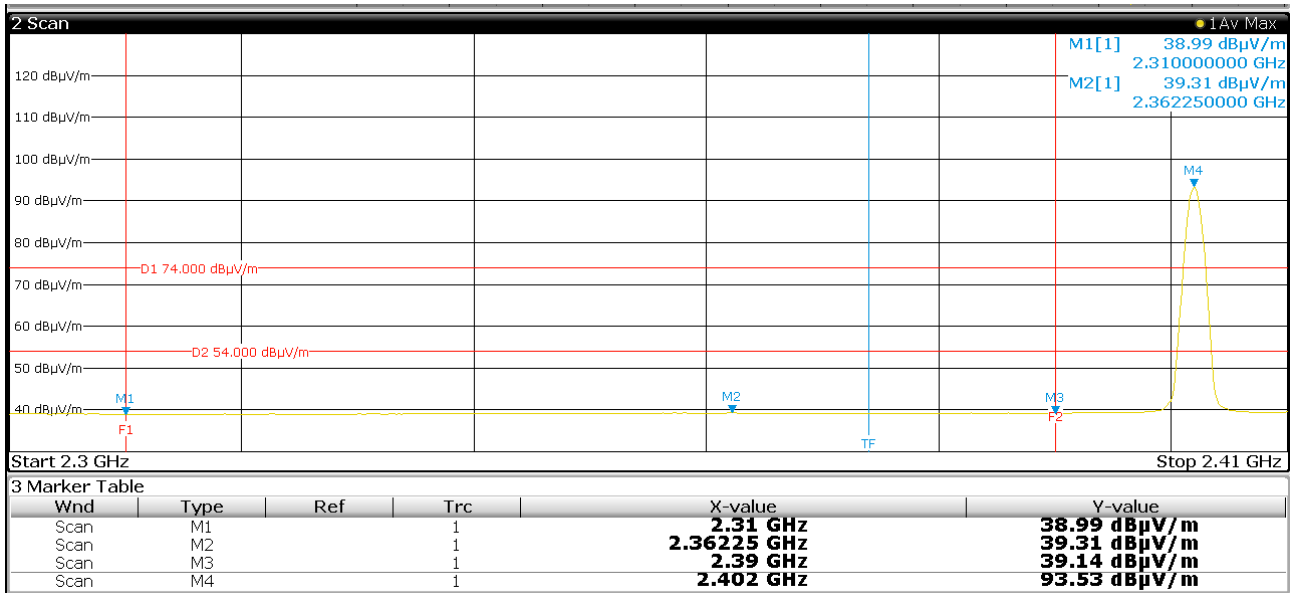


Figure 27: Chart of band edge compliance test, lower band edge - AV



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

DewertOkin GmbH
 RF Gateway
Bluetooth RF-Gateway
 (BLE mode)

| f [MHz] | E _{meas} [dB μ V/m] | Detector | Restricted Band | Limit [dB μ V/m] | Result |
|----------|----------------------------------|----------|-----------------|----------------------|---------|
| 2310.000 | 52.16 | PK | Yes | 74 | Pass |
| 2310.000 | 38.99 | AV | | 54 | Pass |
| 2362.250 | 60.09 | PK | | 74 | Pass |
| 2362.250 | 39.31 | AV | | 54 | Pass |
| 2390.000 | 54.93 | PK | | 74 | Pass |
| 2390.000 | 39.14 | AV | | 54 | Pass |
| 2402.000 | 94.40 | PK | No | ---- | Carrier |
| 2402.000 | 93.53 | AV | | ---- | Carrier |

Table 9: Final result of band edge compliance test, lower band edge



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

DewertOkin GmbH
 RF Gateway
Bluetooth RF-Gateway
 (BLE mode)

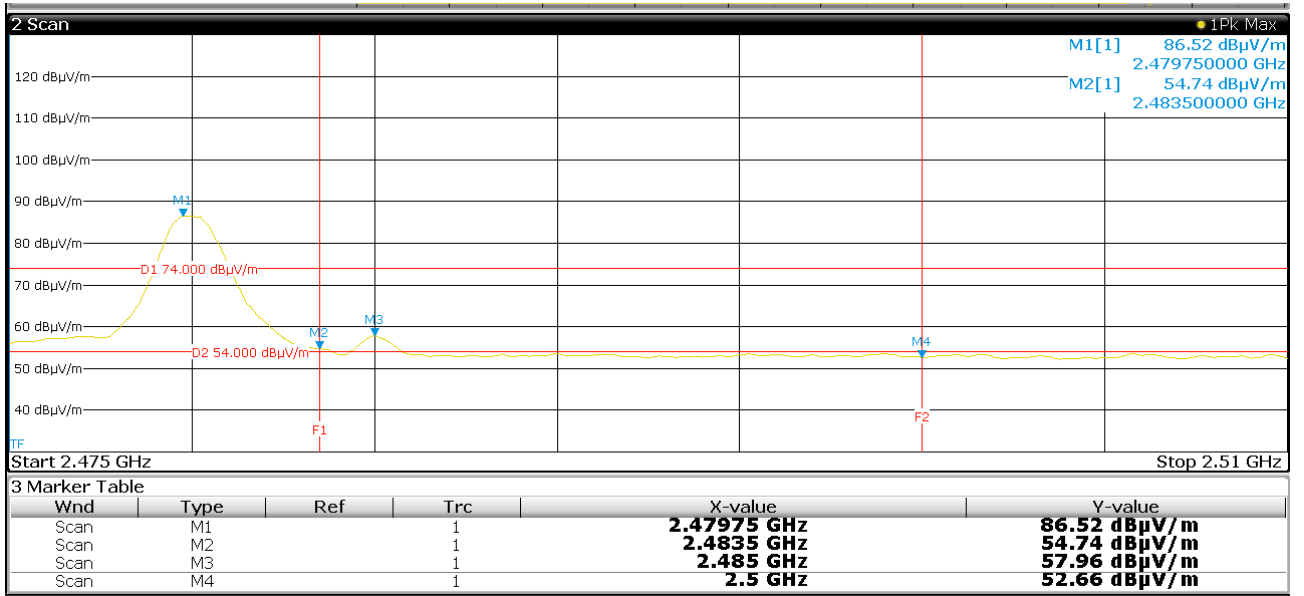


Figure 28: Chart of band edge compliance test, upper band edge - PK

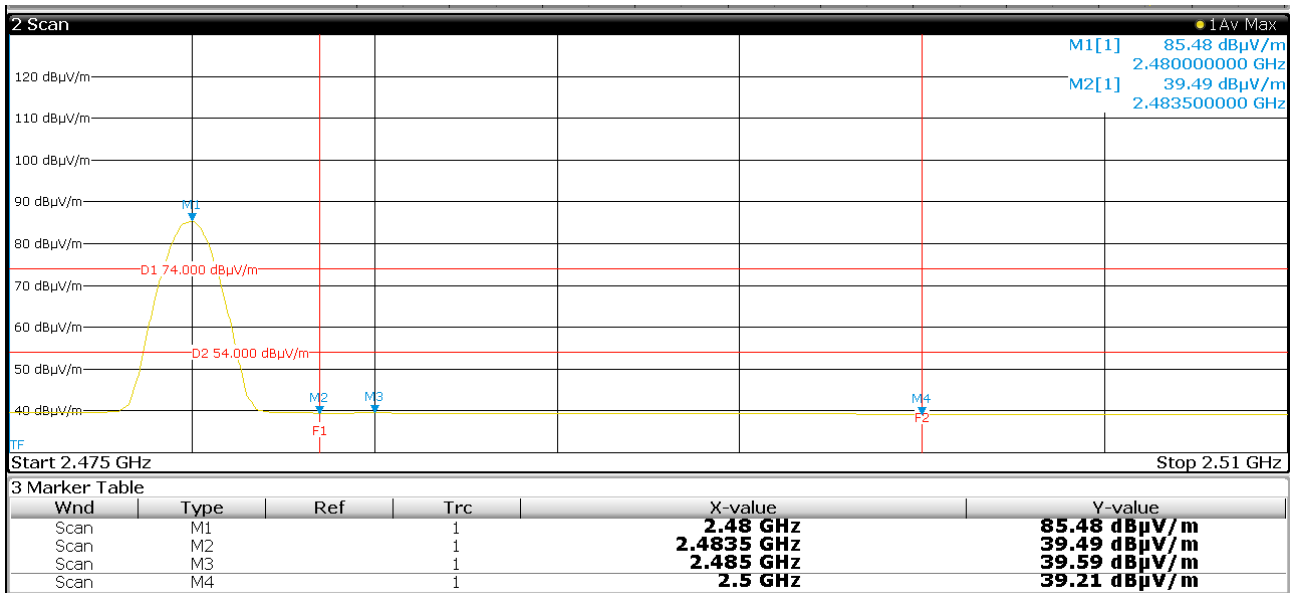


Figure 29: Chart of band edge compliance test, upper band edge - AV



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

DewertOkin GmbH
 RF Gateway
Bluetooth RF-Gateway
 (BLE mode)

| f[MHz] | E _{meas} [dB μ V/m] | Detector | Restricted Band | Limit [dB μ V/m] | Result |
|----------|----------------------------------|----------|-----------------|----------------------|---------|
| 2479.750 | 86.52 | PK | No | ---- | Carrier |
| 2480.000 | 85.48 | AV | | ---- | Carrier |
| 2483.500 | 54.74 | PK | Yes | 74 | Pass |
| 2483.500 | 39.49 | AV | | 54 | Pass |
| 2485.000 | 57.96 | PK | | 74 | Pass |
| 2485.000 | 39.59 | AV | | 54 | Pass |
| 2500.000 | 52.66 | PK | | 74 | Pass |
| 2500.000 | 39.21 | AV | | 54 | Pass |

Table 10: Final result of band edge compliance test, upper band edge



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

DewertOkin GmbH
 RF Gateway
Bluetooth RF-Gateway
 (BLE mode)

6.8 Spurious radiated emissions 9 kHz to 10th harmonic

47 CFR part and section: 15.247(d)
 Equivalent to IC radio standard(s): RSS-Gen Issue 4, section 6.13
 RSS-247 Issue 2, section 5.5
 Measurement procedure: See 5.8

Performed by: Martin Müller Date of test: March 6, 2017

Result: Test passed Test not passed

6.8.1 Test equipment

| Type | Designation | Manufacturer | Inventory no. |
|--|-----------------|--------------------------|---------------|
| <input checked="" type="checkbox"/> Compact Diagnostic Chamber (CDC) | VK041.0174 | Albatross Projects | E00026 |
| <input checked="" type="checkbox"/> Open Area Test Site (OATS) | --- | EMV TESTHAUS GmbH | E00354 |
| <input type="checkbox"/> Semi Anechoic Chamber (SAC) | --- | Albatross Projects | E00716 |
| <input checked="" type="checkbox"/> Anechoic Chamber (AC) | --- | EMV TESTHAUS GmbH | E00100 |
| <input checked="" type="checkbox"/> EMI test receiver (CDC) | ESCI 3 | Rohde & Schwarz | E00001 |
| <input checked="" type="checkbox"/> EMI test receiver | ESU 26 | Rohde & Schwarz | W00002 |
| <input type="checkbox"/> EMI test receiver (SAC) | ESR 7 | Rohde & Schwarz | E00739 |
| <input checked="" type="checkbox"/> EMI test receiver (OATS) | ESCI 3 | Rohde & Schwarz | E00552 |
| <input checked="" type="checkbox"/> EMI test receiver | ESW 44 | Rohde & Schwarz | E00895 |
| <input type="checkbox"/> Preamplifier | AMF-5D-00501800 | Miteq | W00089 |
| <input checked="" type="checkbox"/> Preamplifier | AMF-6F-16002650 | Miteq | W00090 |
| <input checked="" type="checkbox"/> Loop antenna | HFH2-Z2 | Rohde & Schwarz | E00060 |
| <input checked="" type="checkbox"/> TRILOG broadband antenna (CDC) | VULB 9160 | Schwarzbeck | E00011 |
| <input checked="" type="checkbox"/> TRILOG broadband antenna (OATS) | VULB 9163 | Schwarzbeck | E00013 |
| <input type="checkbox"/> TRILOG broadband antenna (SAC) | VULB 9162 | Schwarzbeck | E00643 |
| <input type="checkbox"/> Horn antenna | BBHA 9120D | Schwarzbeck | W00052 |
| <input checked="" type="checkbox"/> Horn antenna | BBHA 9120D | Schwarzbeck | W00053 |
| <input checked="" type="checkbox"/> Horn antenna | BBHA 9170 | Schwarzbeck | W00055 |
| <input checked="" type="checkbox"/> Measurement software | E10 | ib comPLAN | E00443 |
| <input type="checkbox"/> Measurement software | EMC 32 | Rohde & Schwarz | E00777 |



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

DewertOkin GmbH
 RF Gateway
Bluetooth RF-Gateway
 (BLE mode)

6.8.2 Limits < 1 GHz

| Frequency [MHz] | Field strength Fs [$\mu\text{V/m}$] | Field strength [dB $\mu\text{V/m}$] | Measurement distance d [m] |
|-----------------|---------------------------------------|--------------------------------------|----------------------------|
| 0.009 – 0.490 | 266.6 – 4.9 | 48.5 – 13.8 | 300 |
| 0.490 – 1.705 | 48.98 – 14.08 | 33.8 – 22.97 | 30 |
| 1.705 – 30.0 | 30 | 29.54 | 30 |
| 30 – 88 | 100 | 40 | 3 |
| 88 – 216 | 150 | 43.5 | 3 |
| 216 - 960 | 200 | 46 | 3 |
| Above 960 | 500 | 54 | 3 |

Recalculation factor is determined according to ANSI C63.10, section 6.4.4.2 “Extrapolation from the measurement of a single point”:

$$d_{\text{near field}} = 47.77 / f_{\text{MHz}}, \text{ or}$$

$$f_{\text{MHz}} = 47.77 / d_{\text{near field}}$$

The frequency f_{MHz} at which the near field distance is equal to the limit and/or test distance is important for selection of the right formula for determining the recalculation factor:

$$\begin{aligned} f_{\text{MHz}}(300 \text{ m}) &\approx 0.159 \text{ MHz} \\ f_{\text{MHz}}(30 \text{ m}) &\approx 1.592 \text{ MHz} \\ f_{\text{MHz}}(3 \text{ m}) &\approx 15.923 \text{ MHz} \end{aligned}$$

For $9 \text{ kHz} \leq f \leq 159 \text{ kHz}$ and $490 \text{ kHz} < f \leq 1.592 \text{ MHz}$:

$$\text{Recalculation factor} = -40 \log(d_{\text{limit}} / d_{\text{measure}})$$

For $159 \text{ kHz} < f \leq 490 \text{ kHz}$ and $1.592 \text{ MHz} < f \leq 15.923 \text{ MHz}$:

$$\text{Recalculation factor} = -40 \log(d_{\text{near field}} / d_{\text{measure}}) - 20 \log(d_{\text{limit}} / d_{\text{near field}})$$

For $f > 15.923 \text{ MHz}$:

$$\text{Recalculation factor} = -20 \log(d_{\text{limit}} / d_{\text{measure}})$$

The limits in the graphics and value lists are derived from the general radiated emission limits as specified in 15.209 using the recalculation factor as described above.

6.8.3 Limits > 1 GHz

- < -20dBc outside restricted bands
- < 54dB μV (average detector) inside restricted bands
- < 74dB μV (peak detector) inside restricted bands



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

DewertOkin GmbH
RF Gateway
Bluetooth RF-Gateway
(BLE mode)

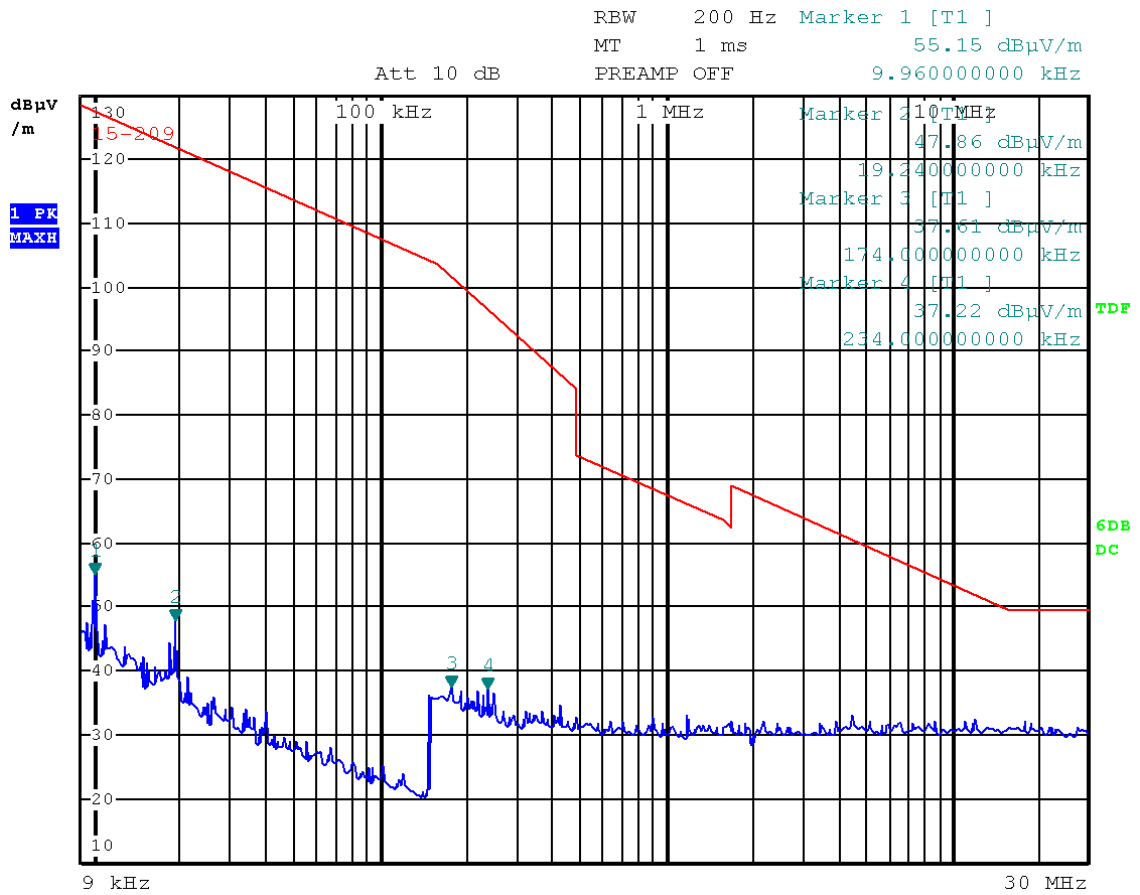


Figure 30: Chart of spurious radiated emission test 9 kHz - 30 MHz, channel low

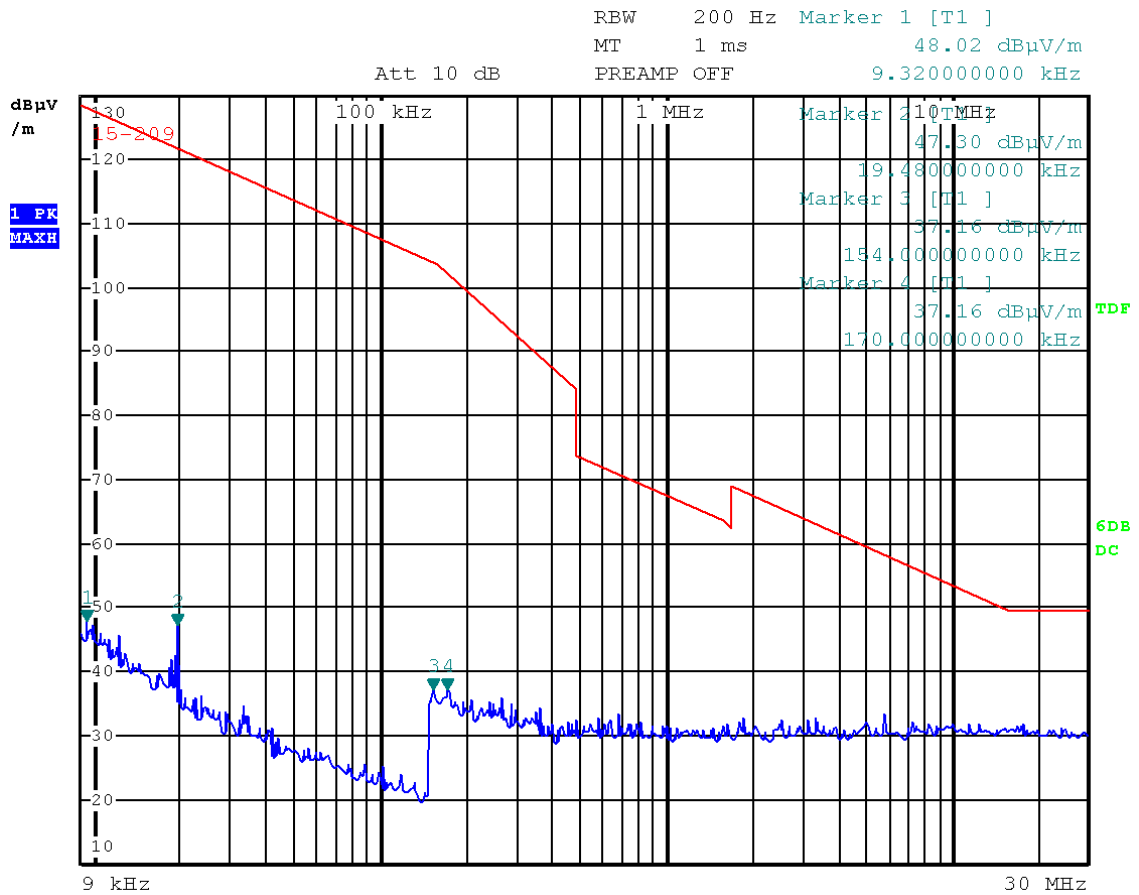


Figure 31: Chart of spurious radiated emission test 9 kHz - 30 MHz, channel mid

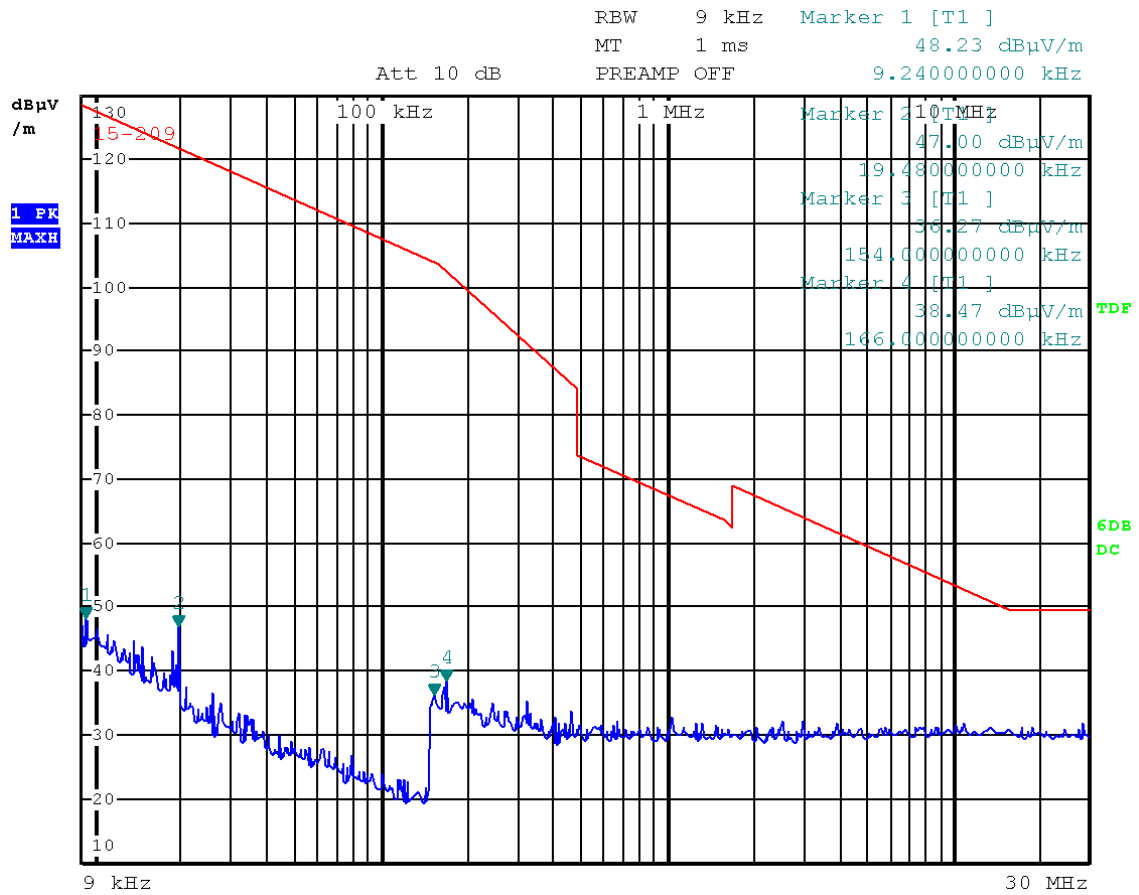


Figure 32: Chart of spurious radiated emission test 9 kHz - 30 MHz, channel high

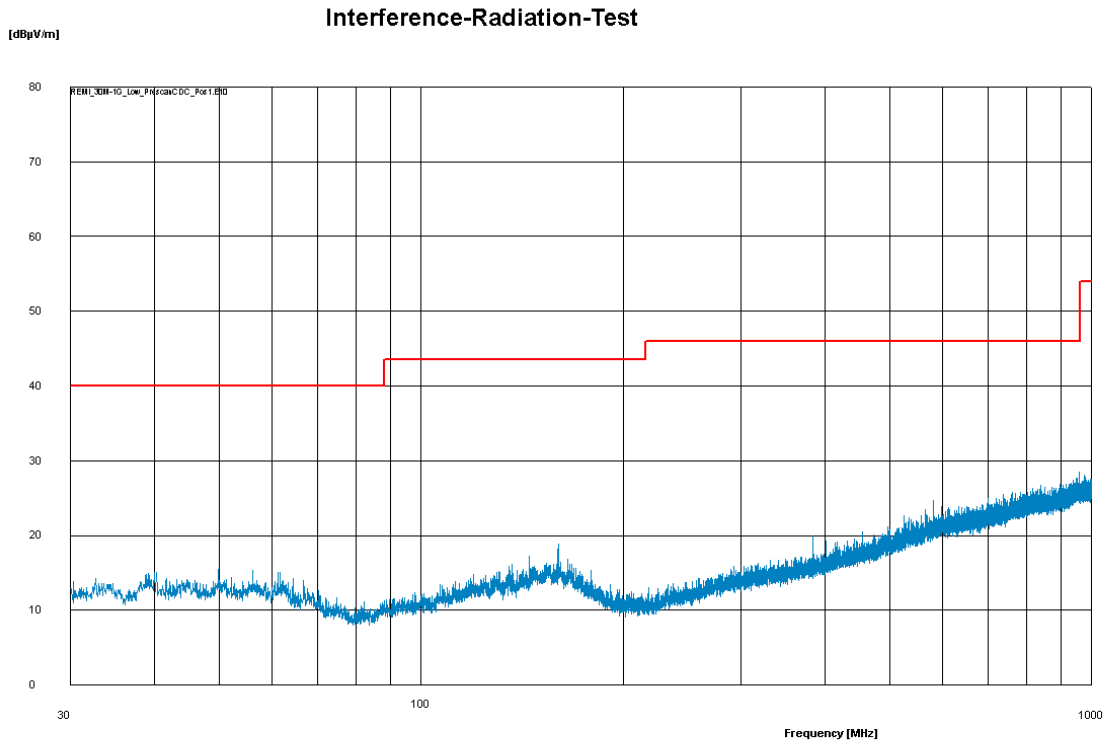


Figure 33: Chart of spurious radiated emission test 30 MHz - 1 GHz, channel low

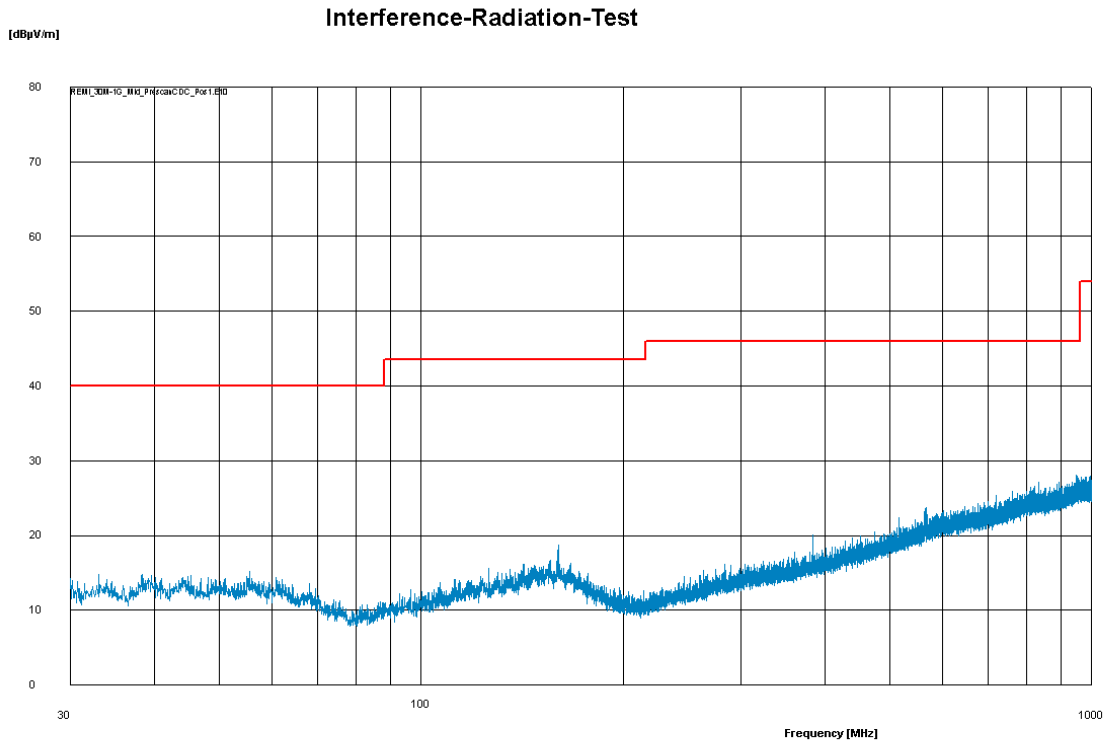


Figure 34: Chart of spurious radiated emission test 30 MHz - 1 GHz, channel mid

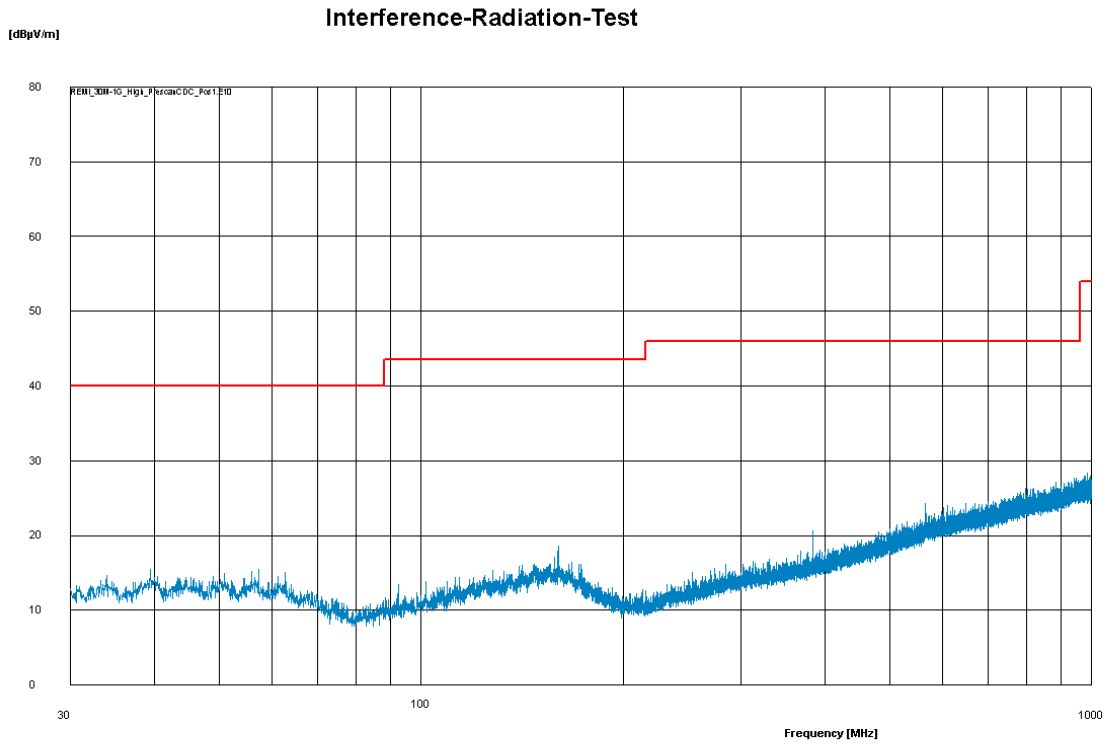


Figure 35: Chart of spurious radiated emission test 30 MHz - 1 GHz, channel high

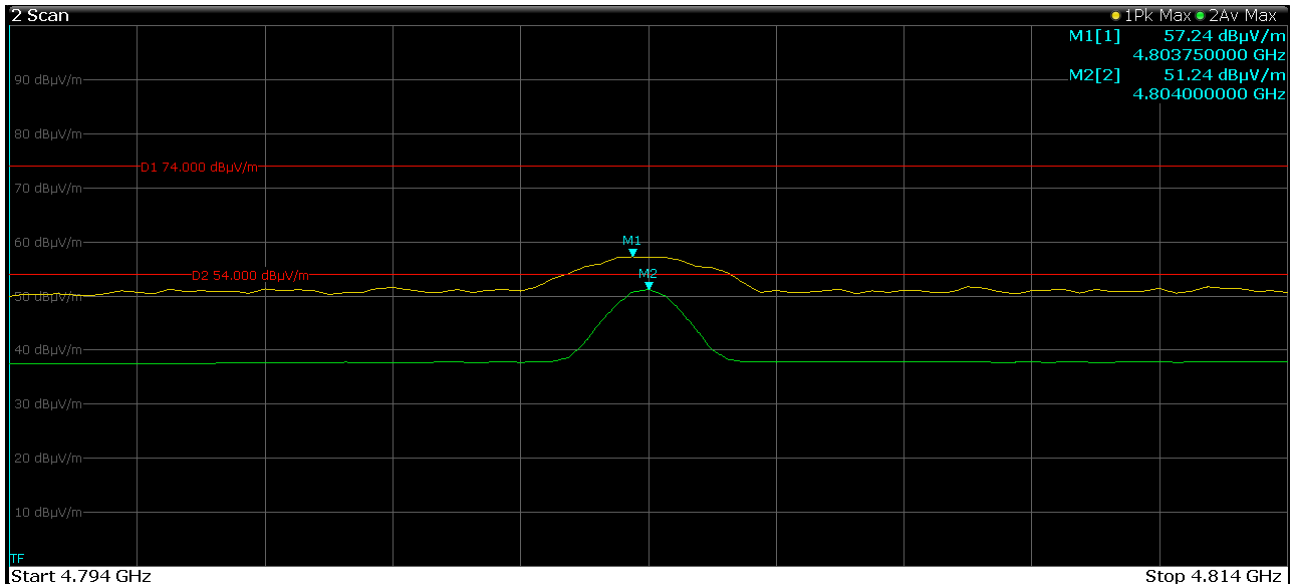


Figure 36: 1st Chart of spurious radiated emission test 1 GHz to 10th harmonic, channel low

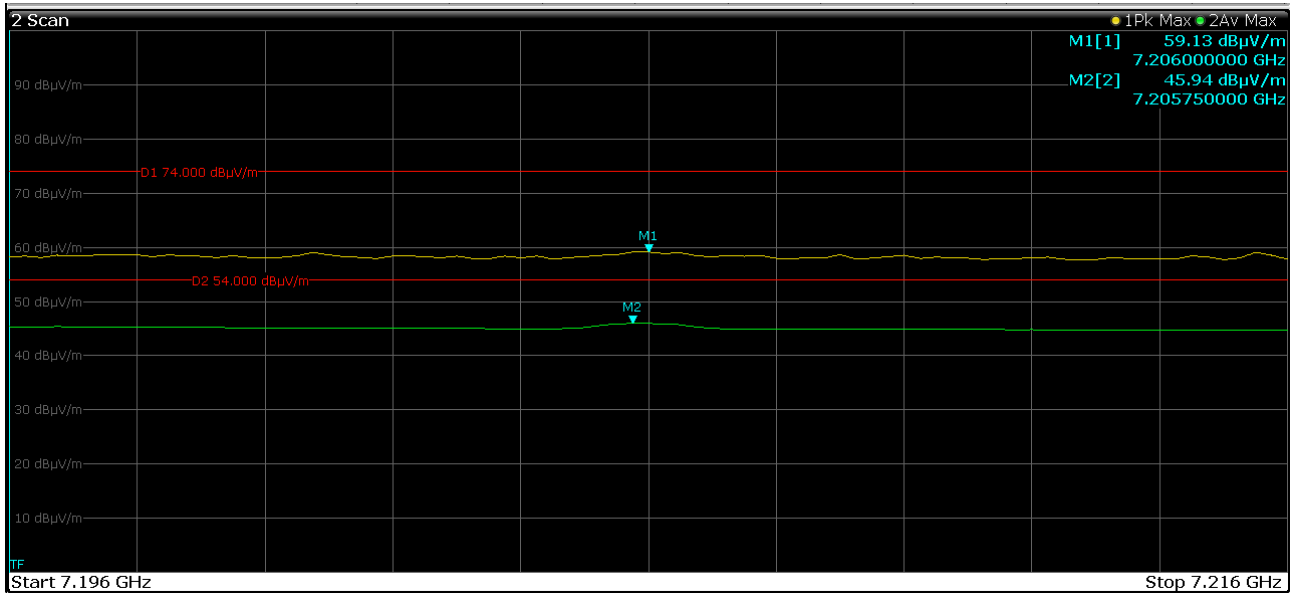


Figure 37: 2nd Chart of spurious radiated emission test 1 GHz to 10th harmonic, channel low

| Channel low | | | | | | | | | |
|-------------|-------------------------------|---------|--------------|--------------|----------------|----------|-------------|-------------------|---------|
| f[GHz] | E _{meas} [dBμV/m] | EUT-Pos | Polarization | Table [°] | Height [cm] | Detector | Restr. Band | Limit [dBμV/m] | Result |
| 2.4020 | 94.40 ¹⁾ | 1 | H | 329 | 170 | PK | No | --- | Carrier |
| 2.4020 | 93.53 ¹⁾ | | | | | AV | | --- | Carrier |
| 4.8038 | 57.24 | 1 | H | 214 | 138 | PK | Yes | 74 | Pass |
| 4.8040 | 51.24 | | | | | AV | | 54 | Pass |
| 7.2060 | 59.13 | 2 | H | 253 | 195 | PK | No | -20 dBc | Pass |
| 7.2058 | 45.94 | | | | | AV | | -20 dBc | Pass |

Table 11: Final result of spurious radiated emission test 1 GHz to 10th harmonic, channel low

1) see clause 6.7



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

DewertOkin GmbH
 RF Gateway
Bluetooth RF-Gateway
 (BLE mode)

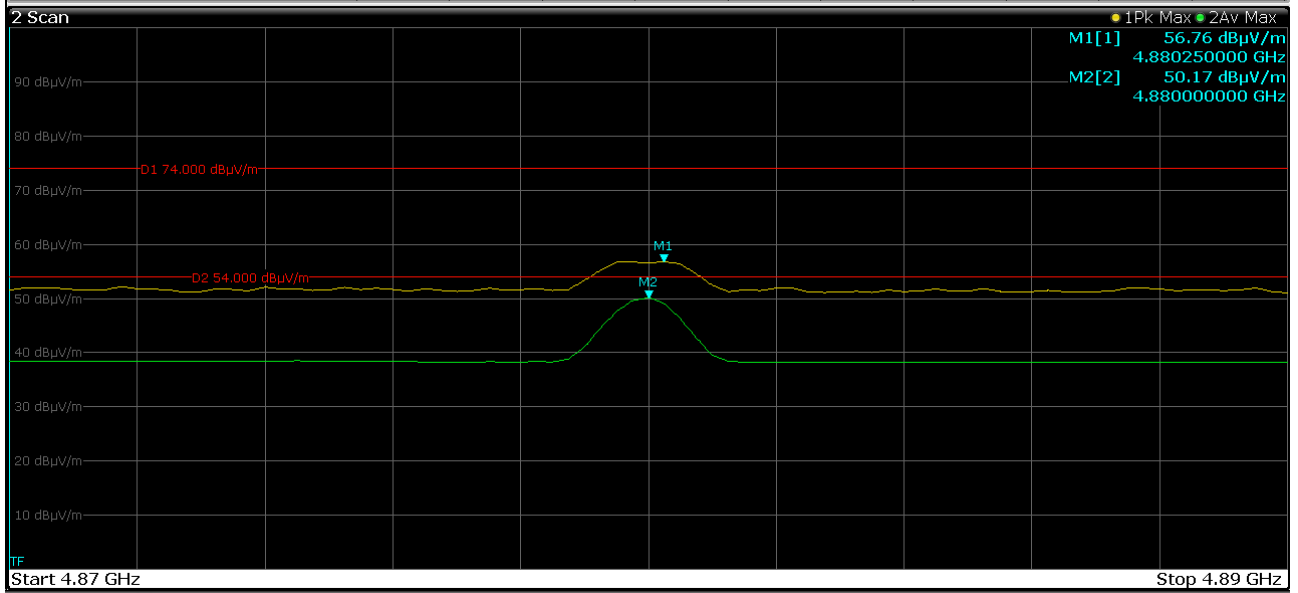


Figure 38: 1st Chart of spurious radiated emission test 1 GHz to 10th harmonic, channel mid

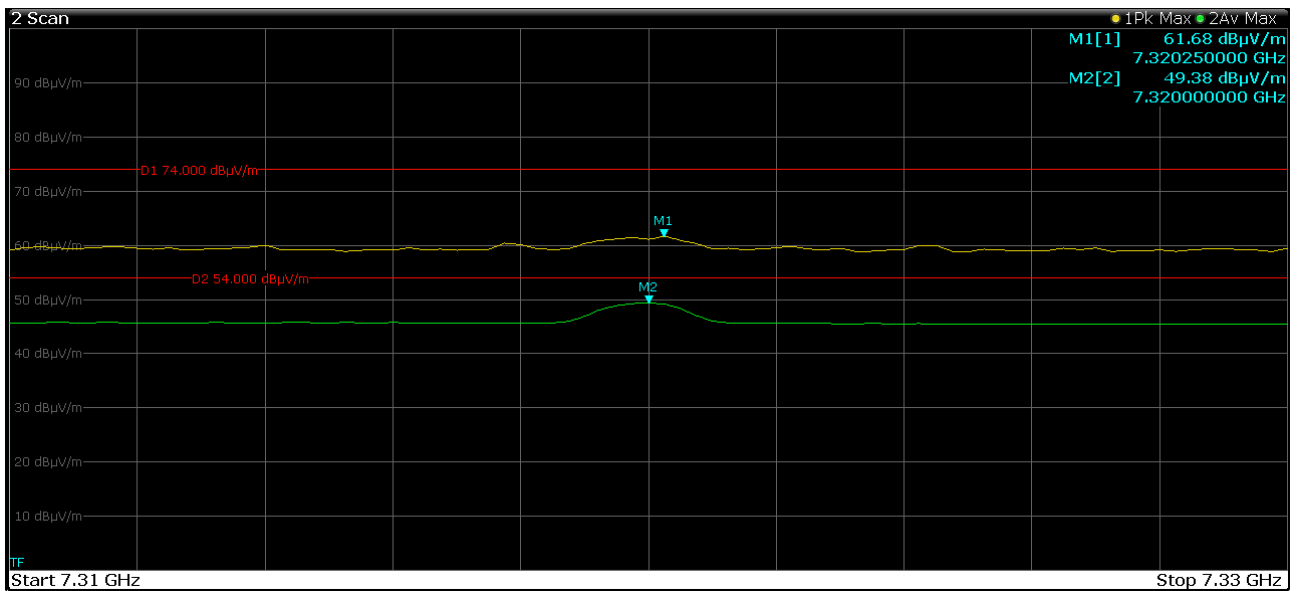


Figure 39: 2nd Chart of spurious radiated emission test 1 GHz to 10th harmonic, channel mid

| Channel mid | | | | | | | | | |
|-------------|-------------------------------------|---------|--------------|--------------|----------------|----------|-------------|-------------------------|--------|
| f[GHz] | E _{meas} [dB μ V/m] | EUT-Pos | Polarization | Table [°] | Height [cm] | Detector | Restr. Band | Limit [dB μ V/m] | Result |
| 4.8803 | 56.76 | 1 | H | 31 | 142 | PK | Yes | 74 | Pass |
| 4.8800 | 50.17 | | | | | AV | | 54 | Pass |
| 7.3203 | 61.68 | 2 | H | 244 | 174 | PK | Yes | 74 | Pass |
| 7.3200 | 49.38 | | | | | AV | | 54 | Pass |

Table 12: Final result of spurious radiated emission test 1 GHz to 10th harmonic, channel mid



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

DewertOkin GmbH
 RF Gateway
Bluetooth RF-Gateway
 (BLE mode)

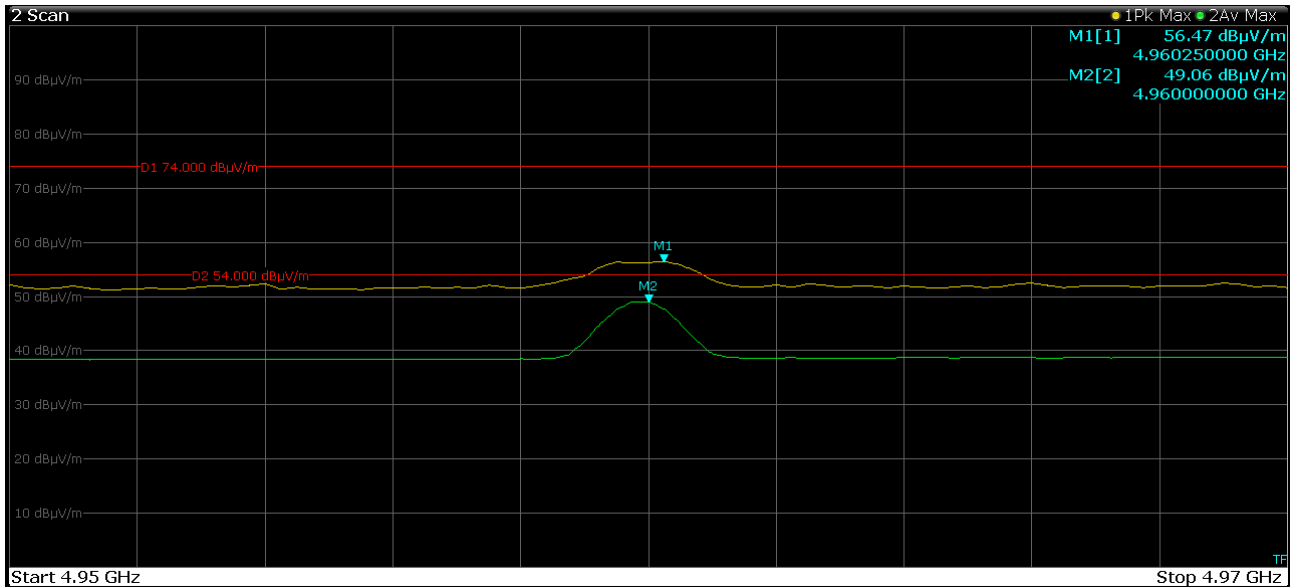


Figure 40: 1st Chart of spurious radiated emission test 1 GHz to 10th harmonic, channel high

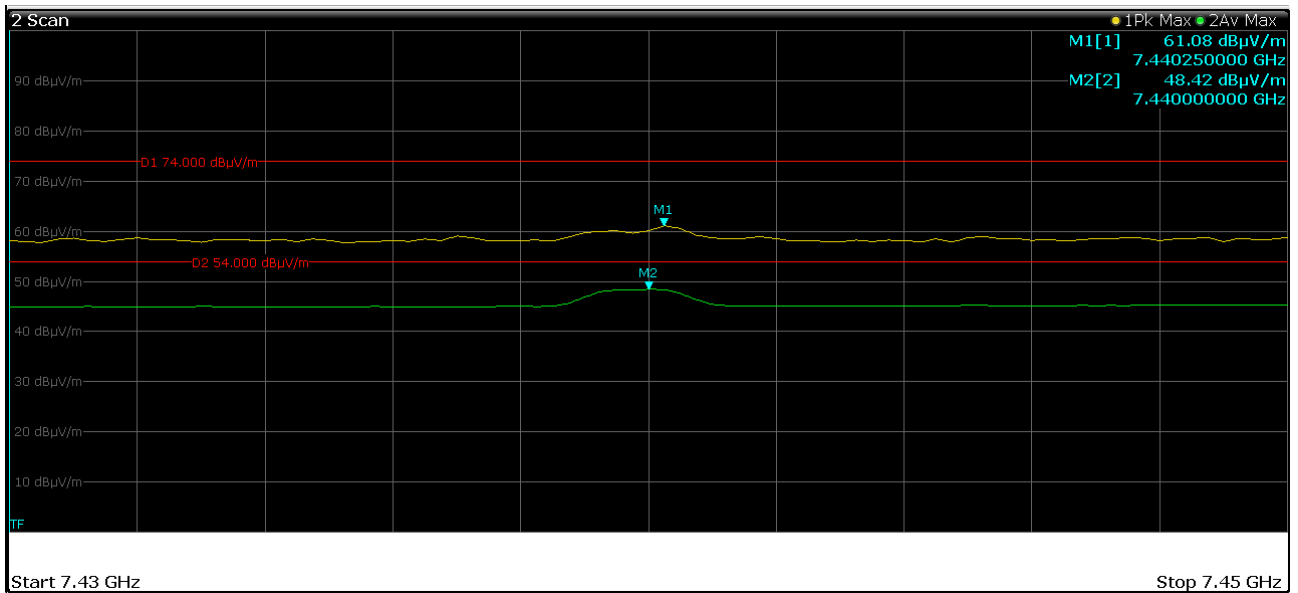


Figure 41: 2nd Chart of spurious radiated emission test 1 GHz to 10th harmonic, channel high

| Channel high | | | | | | | | | |
|--------------|-------------------------------|---------|--------------|--------------|----------------|----------|-------------|-------------------|--------|
| f[GHz] | E _{meas} [dBμV/m] | EUT-Pos | Polarization | Table [°] | Height [cm] | Detector | Restr. Band | Limit [dBμV/m] | Result |
| 4.9603 | 56.47 | 1 | H | 216 | 147 | PK | Yes | 74 | Pass |
| 4.9600 | 49.06 | | | | | AV | | 54 | Pass |
| 7.4403 | 61.08 | 2 | H | 310 | 192 | PK | Yes | 74 | Pass |
| 7.4400 | 48.42 | | | | | AV | | 54 | Pass |

Table 13: Final result of spurious radiated emission test 1 GHz to 10th harmonic, channel high



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

DewertOkin GmbH
 RF Gateway
Bluetooth RF-Gateway
 (BLE mode)

6.9 Radio frequency radiation exposure evaluation for mobile devices

Reference(s): 47 CFR Part 2, §2.1091
KDB 447498 D01, section 7
RSS Gen Issue 4, section 3.2
RSS-102 Issue 5, section 2.5.2

| | | | |
|---------------|---|--|---------------|
| Performed by: | Martin Müller | Date of test: | March 8, 2017 |
| Result: | <input checked="" type="checkbox"/> Test passed | <input type="checkbox"/> Test not passed | |

6.9.1 Data of equipment under test (EUT)

| | | | |
|--|------------------------------------|---|-------------------------------|
| Antenna connector (see clause 3): | <input type="checkbox"/> permanent | <input checked="" type="checkbox"/> temporary | <input type="checkbox"/> none |
| Antenna detachable: | <input type="checkbox"/> yes | <input checked="" type="checkbox"/> no | |
| Tune-up function: | <input type="checkbox"/> yes | <input checked="" type="checkbox"/> no | |
| Maximum antenna gain (see clause 3): | logarithmic 0.0 dBi | numeric 1.0 | |
| Maximum conducted output power (see clause 6.5): | logarithmic -0.67 dBm | numeric 0.86 mW | |
| Maximum equivalent isotropically radiated power: | logarithmic -0.67 dBm | numeric 0.86 mW | |
| Maximum operation frequency (see clause 3): | 2480.000 MHz | | |

6.9.2 Standalone Requirements for EUT

6.9.2.1 Requirements

This estimation follows the general guidelines for RF Exposure according to KDB 447498.

As noted in §2.1091(b) a mobile device is defined as “a transmitting device designed to be used in other than fixed locations and to generally be used in such a way that a **separation distance of at least 20 centimeters** is normally maintained between the transmitter's radiating structure(s) and the body of the user or nearby persons.”

According to §2.1091(c) the limits to be used for evaluation are defined in §1.1310.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

DewertOkin GmbH
RF Gateway
Bluetooth RF-Gateway
(BLE mode)

As specified in §1.1310(d)(2) at operating frequencies less than or equal to 6 GHz, the limits for maximum permissible exposure (MPE), derived from whole-body SAR limits and listed in Table 1 of §1.1310(e) may be used.

Table 14 below shows the limits for Maximum Permissible Exposure (MPE) to radiofrequency electromagnetic fields.

| Frequency range (MHz) | Electric field strength (V/m) | Magnetic field strength (A/m) | Power density (mW/cm ²) | Averaging time (minutes) |
|--|----------------------------------|----------------------------------|--|-----------------------------|
| (A) Limits for Occupational/Controlled Exposure | | | | |
| 0.3 - 3.0 | 614 | 1.63 | *100 | 6 |
| 3.0 - 30 | 1842/f | 4.89/f | *900/f ² | 6 |
| 30 - 300 | 61.4 | 0.163 | 1.0 | 6 |
| 300 - 1500 | | | f/300 | 6 |
| 1500 - 100000 | | | 5 | 6 |
| (B) Limits for General Population/Uncontrolled Exposure | | | | |
| 0.3 - 1.34 | 614 | 1.63 | *100 | 30 |
| 1.34 - 30 | 824/f | 2.19/f | *180/f ² | 30 |
| 30 - 300 | 27.5 | 0.073 | 0.2 | 30 |
| 300 - 1500 | | | f/1500 | 30 |
| 1500 - 100000 | | | 1.0 | 30 |

Table 14: Limits for maximum permissible exposure (MPE) according to table 1 of §1.1310(e)

Notes:

1. f = frequency in MHz.
2. * = Plane-wave equivalent power density.



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

DewertOkin GmbH
 RF Gateway
Bluetooth RF-Gateway
 (BLE mode)

Appropriate RF Field Strength Limits for Devices Used by the General Public (Uncontrolled Environment) can be found in table 4 of RSS-102, section 4:

| Frequency Range (MHz) | Electric Field (V/m rms) | Magnetic Field (A/m rms) | Power Density (W/m ²) | Reference Period (minutes) |
|-----------------------|---------------------------|--|-----------------------------------|----------------------------|
| 0.003-10 | 83 | 90 | - | Instantaneous* |
| 0.1-10 | - | 0.73/f | - | 6** |
| 1.1-10 | 87/f ^{0.5} | - | - | 6** |
| 10-20 | 27.46 | 0.0728 | 2 | 6 |
| 20-48 | 58.07/f ^{0.25} | 0.1540/f ^{0.25} | 8.944/f ^{0.5} | 6 |
| 48-300 | 22.06 | 0.05852 | 1.291 | 6 |
| 300-6000 | 3.142 f ^{0.3417} | 0.008335 f ^{0.3417} | 0.02619 f ^{0.6834} | 6 |
| 6000-15000 | 61.4 | 0.163 | 10 | 6 |
| 15000-150000 | 61.4 | 0.163 | 10 | 616000/f ^{1.2} |
| 150000-300000 | 0.158 f ^{0.5} | 4.21 x 10 ⁻⁴ f ^{0.5} | 6.67 x 10 ⁻⁵ f | 616000/f ^{1.2} |

Note: f is frequency in MHz.
 *Based on nerve stimulation (NS).
 ** Based on specific absorption rate (SAR).

Table 15: RF field strength limits according to table 4 of RSS-102

6.9.2.2 Results

Maximum peak value of electric field strength measured at 2402.0 MHz in a distance of 3 m:
 $E_{\text{radiated}}(3 \text{ m}) = \underline{94.40 \text{ dB}\mu\text{V/m}}$ (see clause 6.7)

Alternatively, the maximum peak value of electric field strength can be calculated using the maximum equivalent isotropically radiated power EIRP according to the formula noted in section 1.1 of KDB Publication no. 412172 D01. The value of EIRP is the product of the linear values of the measured maximum conducted output power and the antenna gain (see clause 6.9.1).

$$E_{\text{conducted}}(3 \text{ m}) = \frac{\sqrt{30 \cdot \text{EIRP}}}{d} = \frac{\sqrt{30 \cdot 0.86 \cdot 10^{-3} \text{ W}}}{3 \text{ m}} = 0.0534 \text{ V/m}$$

$$E_{\text{conducted}}(3 \text{ m}) = \underline{94.56 \text{ dB}\mu\text{V/m}}$$

For further calculations the maximum of both values is selected as the measured value:

$$E_{\text{meas}}(3 \text{ m}) = \underline{94.56 \text{ dB}\mu\text{V/m}}$$



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

DewertOkin GmbH
 RF Gateway
Bluetooth RF-Gateway
 (BLE mode)

Recalculation factor is determined according to ANSI C63.10, section 6.4.4.2 "Extrapolation from the measurement of a single point":

$$f_{\text{MHz}} = 47.77 / d_{\text{near field}}$$

The frequency f_{MHz} at which the near field distance is equal to the limit and/or test distance is important for selection of the right formula for determining the recalculation factor:

$$\begin{aligned} f_{\text{MHz}}(3 \text{ m}) &\approx 15.923 \text{ MHz} \\ f_{\text{MHz}}(20 \text{ cm}) &\approx 238.850 \text{ MHz} \ll 2400 \text{ MHz} \end{aligned}$$

$$\Rightarrow \text{Recalculation factor} = -20 \log(d_{\text{limit}} / d_{\text{measure}})$$

Although expressed in "dB μ V/m" the source of the field strength is magnetic and the value is recorded with a loop antenna measuring magnetic field. Using wave impedance in free space of about $120 \cdot \pi \Omega$ (51.5 dB) magnetic field strength results in:

$$H_{\text{meas}}(3 \text{ m}) = E_{\text{meas}}(3 \text{ m}) - 51.5 \text{ dB} = 94.56 \text{ dB}\mu\text{V/m} - 51.5 \text{ dB} = \underline{\underline{43.06 \text{ dB}\mu\text{A/m}}}$$

Worst case field strength is calculated for a separation distance of 20 centimeters.

Using an extrapolation factor of 20 dB/decade ($\sim r^{-1}$) results in:

$$E_{\text{calc}}(20 \text{ cm}) = 94.56 \text{ dB}\mu\text{V/m} - 20 \cdot \log(0.2 \text{ m} / 3 \text{ m}) = 94.56 \text{ dB}\mu\text{V/m} + 23.52 \text{ dB}$$

$$E_{\text{calc}}(20 \text{ cm}) = 118.08 \text{ dB}\mu\text{V/m} = \underline{\underline{0.802 \text{ V/m}}}$$

Using an extrapolation factor of 20 dB/decade ($\sim r^{-1}$) results in:

$$H_{\text{calc}}(20 \text{ cm}) = 43.06 \text{ dB}\mu\text{A/m} - 20 \cdot \log(0.2 \text{ m} / 3 \text{ m}) = 43.06 \text{ dB}\mu\text{A/m} + 23.52 \text{ dB}$$

$$H_{\text{calc}}(20 \text{ cm}) = 66.58 \text{ dB}\mu\text{A/m} = \underline{\underline{2.133 \cdot 10^{-3} \text{ A/m}}}$$

Worst case power density is calculated for a separation distance of 20 centimeters by using the respective field strengths for an extrapolation factor of 20 dB/decade ($\sim r^{-1}$):

$$S_{\text{calc}}(20 \text{ cm}) = E_{\text{calc}}(20 \text{ cm}) \cdot H_{\text{calc}}(20 \text{ cm}) = 0.802 \text{ V/m} \cdot 2.133 \cdot 10^{-3} \text{ A/m}$$

$$S_{\text{calc}}(20 \text{ cm}) = \underline{\underline{0.0017 \text{ W/m}^2}} = \underline{\underline{0.00017 \text{ mW/cm}^2}}$$



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

DewertOkin GmbH
RF Gateway
Bluetooth RF-Gateway
(BLE mode)

Comparing the calculated results to the limits for general population/uncontrolled exposure at 2400.0 MHz shows that even with worst case calculation using peak values the limits are kept.

| E-field | | | |
|---|---|---|---|
| $E_{\text{calc}}(20 \text{ cm})$ (V/m) | Limit 47 CFR Par 1, §1.1310(e) (V/m) | Limit RSS-102, table 2 (V/m) | |
| 0.802 | --- | 44.898 | |
| H-field | | | |
| $H_{\text{calc}}(20 \text{ cm})$ (A/m) | Limit 47 CFR Par 1, §1.1310(e) (A/m) | Limit RSS-102, table 2 (A/m) | |
| 0.0021 | --- | 0.119 | |
| Power density | | | |
| $S_{\text{calc}}(20 \text{ cm})$ (mW/cm ²) | Limit 47 CFR Par 1, §1.1310(e) (mW/cm ²) | $S_{\text{calc}}(20 \text{ cm})$ (W/m ²) | Limit RSS-102, table 2 (W/m ²) |
| 0.00017 | 1.0 | 0.0017 | 5.348 |

Table 16: Calculated results compared to RF field strength limits

6.9.3 Requirements for simultaneous transmission

According to customer, simultaneous transmission of SRD and BLE is not intended to be used. However, the following calculations show that MPE and RF field strength limits would be kept even with simultaneous transmission of SRD and BLE.

6.9.3.1 Requirements

As noted in KDB 447498 D01, section 7.2, simultaneous transmission MPE test exclusion applies when the sum of the MPE ratios for all simultaneously transmitting antennas incorporated in a host device is ≤ 1.0 , according to calculated/estimated, numerically modeled, or measured field strengths or power density.

In case of simultaneous transmission the standalone results are used for calculation according to the following formulas:

$$\sum_{i=SRD}^{BLE} \frac{E_i}{E_{limit\ i}} \leq 1 \Leftrightarrow \frac{E_{SRD}(V/m)}{E_{limit\ SRD}(V/m)} + \frac{E_{BLE}(V/m)}{E_{limit\ BLE}(V/m)} \leq 1$$

$$\sum_{i=SRD}^{BLE} \frac{H_i}{H_{limit\ i}} \leq 1 \Leftrightarrow \frac{H_{SRD}(A/m)}{H_{limit\ SRD}(A/m)} + \frac{H_{BLE}(A/m)}{H_{limit\ BLE}(A/m)} \leq 1$$

$$\sum_{i=SRD}^{BLE} \frac{S_i}{S_{limit\ i}} \leq 1 \Leftrightarrow \frac{S_{SRD}(W/m^2)}{S_{limit\ SRD}(W/m^2)} + \frac{S_{BLE}(W/m^2)}{S_{limit\ BLE}(W/m^2)} \leq 1$$



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

DewertOkin GmbH
RF Gateway
Bluetooth RF-Gateway
(BLE mode)

Note: As for power density using the limit according to RSS-102, table 2, gives the worst case ratio, the values in W/m^2 are selected.

6.9.3.2 Results

With values for SRD mode taken from clause 6.9.2.2 of test report no. 160583-AU01+W03 the results are:

$$\frac{E_{SRD}(V/m)}{E_{limit\ SRD}(V/m)} + \frac{E_{BLE}(V/m)}{E_{limit\ BLE}(V/m)} = \frac{0.968\ V/m + 0.802\ V/m}{44.898\ V/m} \approx 0.039 \leq 1 \quad \checkmark$$

$$\frac{H_{SRD}(A/m)}{H_{limit\ SRD}(A/m)} + \frac{H_{BLE}(A/m)}{H_{limit\ BLE}(A/m)} = \frac{0.0026\ A/m + 0.0021\ A/m}{0.119\ A/m} \approx 0.039 \leq 1 \quad \checkmark$$

$$\frac{S_{SRD}(W/m^2)}{S_{limit\ SRD}(W/m^2)} + \frac{S_{BLE}(W/m^2)}{S_{limit\ BLE}(W/m^2)} = \frac{0.0025\ W/m^2 + 0.0017\ W/m^2}{5.348\ W/m^2} \approx 0.0008 \leq 1 \quad \checkmark$$



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

DewertOkin GmbH
RF Gateway
Bluetooth RF-Gateway
(BLE mode)

7 Equipment calibration status

| Description | Modell number | Serial number | Inventory number(s) | Last calibration | Next calibration |
|----------------------------------|--------------------------|-------------------------|----------------------------|------------------|------------------|
| Test receiver | ESCI 3 | 100013 | E00001 | 2016-02 | 2018-02 |
| Test receiver | ESCI 3 | 100328 | E00552 | 2016-09 | 2018-09 |
| Test receiver | ESCS 30 | 825442/0002 | E00003 | 2016-04 | 2018-04 |
| Test receiver | ESU 26 | 100026 | W00002 | 2016-02 | 2018-02 |
| Test receiver | ESR 7 | 101059 | E00739 | 2016-04 | 2018-04 |
| Test receiver | ESW 44 | 101538 | E00895 | 2016-12 | 2018-12 |
| Broadband horn antenna | BBHA 9120D | 9120D-593 | W00053 | 2016-03 | 2018-03 |
| Broadband horn antenna | BBHA 9170 | BBHA 9170 | W00055 | 2016-03 | 2018-03 |
| Preamplifier | AMF-5D-00501800-28-13P | 1319793 | W00089 | 2015-06 | 2017-06 |
| Preamplifier | AMF-6F-16002650-25-10P | 1317552 | W00090 | 2015-06 | 2017-06 |
| LISN | ESH2-Z5 | 893406/009 | E00005 | 2016-02 | 2018-02 |
| Loop antenna | HFH2-Z2 | 871398/0050 | E00060 | 2016-09 | 2018-09 |
| Broadband antenna | VULB 9160 | 9160-3050 | E00011 | 2015-09 | 2017-09 |
| Broadband antenna | VULB 9163 | 9163-114 | E00013 | 2015-09 | 2017-09 |
| Shielded room | P92007 | B83117C1109T211 | E00107 | N/A | |
| Compact diagnostic chamber (CDC) | VK041.0174 | D62128-A502-A69-2-0006 | E00026 | N/A | |
| Open area test site (OATS) | --- | --- | E00354 | 2015-10 | 2017-10 |
| Semi anechoic chamber (SAC) | SAC3 | C62128-A520-A643-x-0006 | E00716 | 2015-09 | 2017-09 |
| Climatic chamber 340 I | VC ³ 4034 | 58566123250010 | C00015 | 2016-10 | 2018-10 |
| Cable set shielded room | Cable no. 30 | --- | E00424 | 2016-07 | 2018-07 |
| Cable set CDC | Cables no. 37 and 38 | --- | E00459 E00460 | 2015-05 | 2017-05 |
| Cable set OATS 3 m | Cables no. 19, 34 and 36 | --- | E00453 E00456 E00458 | 2015-11 | 2017-11 |
| Cable set SAC 3 m | Cables no. 57, 58 and 59 | --- | E00453 E00455 E00458 | 2015-10 | 2017-10 |

Table 17: Equipment calibration status

- Note 1: Expiration date of measurement facility registration (OATS) by
 - FCC (registration number 221458): 2017-04
 - Industry Canada (test sites number 3472A-1 and 3472A-2): 2018-11
- Note 2: Expiration date of test firm accreditation for OATS and SAC:
 FCC test firm type "accredited": 2017-06



EMV **TESTHAUS** GmbH
 Gustav-Hertz-Straße 35
 94315 Straubing
 Germany

DewertOkin GmbH
 RF Gateway
Bluetooth RF-Gateway
 (BLE mode)

8 Measurement uncertainties

| Description | Max. deviation | k= |
|--|----------------------------------|----|
| Conducted emission AMN (9kHz to 30 MHz) | ± 4.1 dB | 2 |
| Carrier frequency separation Number of hopping frequencies Time of occupancy (dwell time) | ± 5.0 % | 2 |
| Bandwidth tests | ± 2.0 % | 2 |
| Maximum conducted output power | ± 1.5 dB | 2 |
| Power spectral density | ± 3.0 dB | 2 |
| Spurious RF conducted emissions | ± 3.0 dB | 2 |
| Radiated emission open field or semi-anechoic chamber 9 kHz to 30 MHz 30 MHz to 300 MHz 300MHz to 1 GHz | ± 4.8 dB ± 5.4 dB ± 5.9 dB | 2 |
| Radiated emission anechoic chamber (> 1000 MHz) | ± 4.5 dB | 2 |

Table 18: Measurement uncertainty

The uncertainty stated is the expanded uncertainty obtained by multiplying the standard uncertainty by the coverage factor k. For a confidence level of 95 % the coverage factor k is 2.



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

DewertOkin GmbH
RF Gateway
Bluetooth RF-Gateway
(BLE mode)

9 Revision history

| <i>Revision</i> | <i>Date</i> | <i>Issued by</i> | <i>Description of modifications</i> |
|-----------------|-------------|------------------|-------------------------------------|
| 0 | 2017-03-09 | Martin Müller | First edition |

10 Additional documents

- Annex A: Pictures of test setup and EUT-positions
- Annex B: Pictures of EUT (external)
- Annex C: Pictures of EUT (internal)



EMV **TESTHAUS** GmbH
Gustav-Hertz-Straße 35
94315 Straubing
Germany

DewertOkin GmbH
RF Gateway
Bluetooth RF-Gateway
(BLE mode)