

Case 1_Measurement Report for Multi-TX Evaluator

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	210.0 x 130.0 x 8.5	

Exposure Conditions


Phantom Section	Position	Test Distance [mm]	Band	Group	UID	Rev	Frequency [MHz]	Channel Number
Flat HSL	BACK	0.00	WLAN 5GHz	WLAN	10544	AAD	5290.000	58
Flat HSL	BACK	0.00	WLAN 5GHz	WLAN	10544	AAD	5775.000	155
Flat HSL	BACK	0.00	ISM 2.4 GHz Band	Bluetooth	10032	CAA	2441.000	39
Flat HSL	BACK	0.00	WLAN 5GHz / ISM 2.4 GHz Band	WLAN / Bluetooth	10544 / 10032	AAD / CAA	5775.000 / 2441.000	155 / 39

Hardware Setup

Phantom	Probe	Calibration Date	DAE	Calibration Date
ELI V8.0 (20deg probe tilt)	EX3DV4 - SN7729	2024-01-22	DAE4 Sn1303	2023-11-20

SAR Measurement Results

Scan Name	psSAR1g [W/kg]	psSAR10g [W/kg]
Combined Scan	1.15	0.395

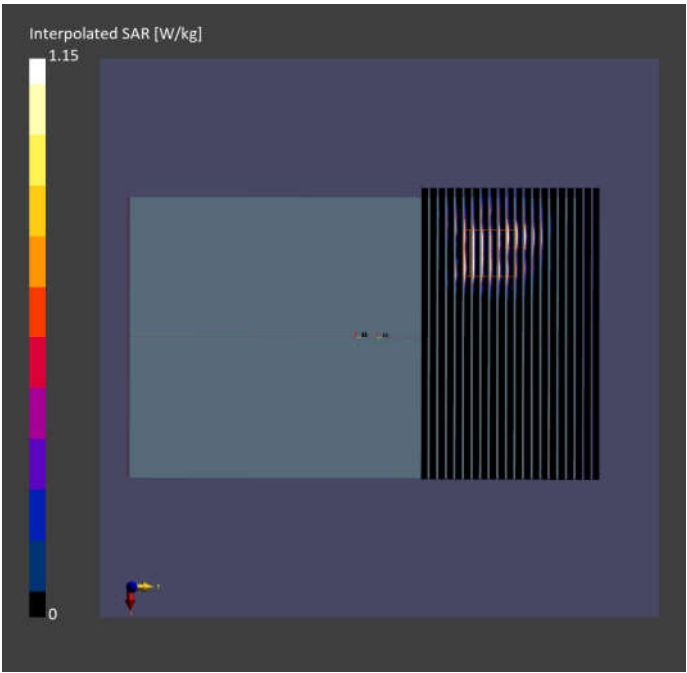

Case 2_Measurement Report for Multi-TX Evaluator

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	210.0 x 130.0 x 8.5	

Exposure Conditions


Phantom Section	Position	Test Distance [mm]	Band	Group	UID	Rev	Frequency [MHz]	Channel Number
Flat HSL	BACK	0.00	U-NII-7	WLAN	10755	AAC	6665.000	143
Flat HSL	BACK	0.00	U-NII-8	WLAN	11026	AAB	6905.000	191
Flat HSL	BACK	0.00	ISM 2.4 GHz Band	Bluetooth	10032	CAA	2441.000	39
Flat HSL	BACK	0.00	ISM 2.4 GHz Band / U-NII-7	Bluetooth / WLAN	10032 / 10755	CAA / AAC	2441.000 / 6665.000	39 / 143

Hardware Setup

Phantom	Probe	Calibration Date	DAE	Calibration Date
ELI V8.0 (20deg probe tilt)	EX3DV4 - SN7729	2024-01-22	DAE4 Sn1303	2023-11-20
ELI V8.0 (20deg probe tilt)	EX3DV4 - SN7764	2023-10-05	DAE4 Sn1303	2023-11-20

SAR Measurement Results

Scan Name	psSAR1g [W/kg]	psSAR10g [W/kg]
Combined Scan	1.21	0.314

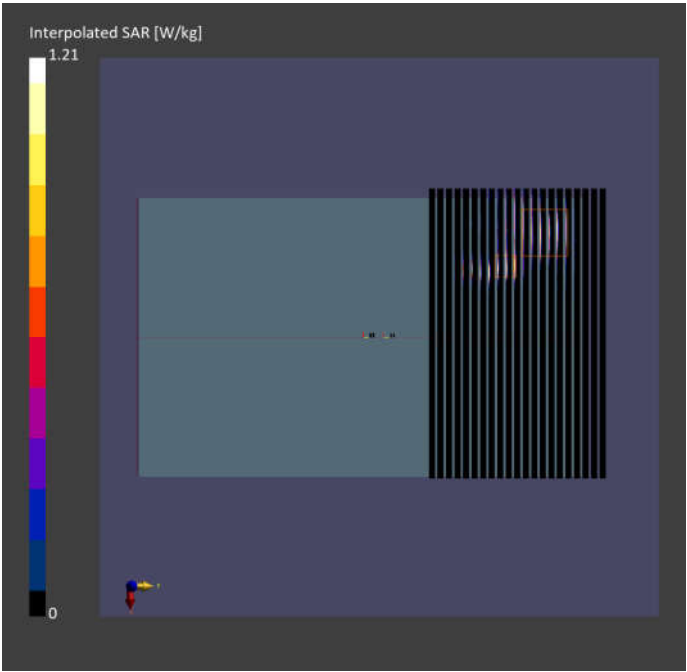

Case 3_Measurement Report for Multi-TX Evaluator

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	210.0 x 130.0 x 8.5	

Exposure Conditions


Phantom Section	Position	Test Distance [mm]	Band	Group	UID	Rev	Frequency [MHz]	Channel Number
Flat HSL	EDGE TOP	0.00	WLAN 5GHz	WLAN	10062	CAE	5300.000	60
Flat HSL	EDGE TOP	0.00	WLAN 5GHz	WLAN	10544	AAD	5690.000	138
Flat HSL	EDGE TOP	0.00	ISM 2.4 GHz Band	Bluetooth	10032	CAA	2441.000	39
Flat HSL	EDGE TOP	0.00	WLAN 5GHz / ISM 2.4 GHz Band	WLAN / Bluetooth	10062 / 10032	CAE / CAA	5300.000 / 2441.000	60 / 39

Hardware Setup

Phantom	Probe	Calibration Date	DAE	Calibration Date
ELI V8.0 (20deg probe tilt)	EX3DV4-SN7729	2024-01-22	DAE4 Sn1303	2023-11-20

SAR Measurement Results

Scan Name	psSAR1g [W/kg]	psSAR10g [W/kg]
Combined Scan	1.31	0.323

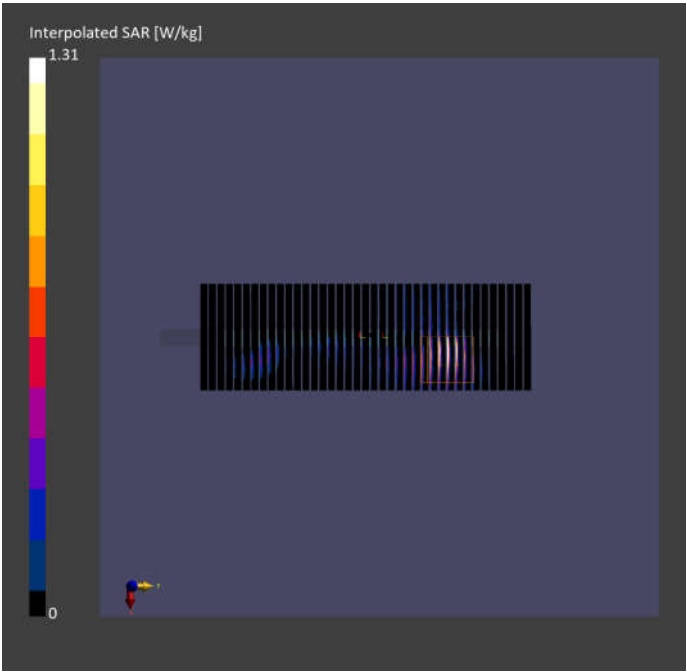

Case 4_Measurement Report for Multi-TX Evaluator

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	210.0 x 130.0 x 8.5	

Exposure Conditions


Phantom Section	Position	Test Distance [mm]	Band	Group	UID	Rev	Frequency [MHz]	Channel Number
Flat HSL	EDGE TOP	0.00	U-NII-7	WLAN	11026	AAB	6745.000	159
Flat HSL	EDGE TOP	0.00	U-NII-8	WLAN	11026	AAB	6905.000	191
Flat HSL	EDGE TOP	0.00	ISM 2.4 GHz Band	Bluetooth	10032	CAA	2441.000	39
Flat HSL	EDGE TOP	0.00	ISM 2.4 GHz Band / ISM 2.4 GHz Band	Bluetooth / Bluetooth	10032 / 10032	CAA / CAA	2441.000 / 2441.000	39 / 39

Hardware Setup

Phantom	Probe	Calibration Date	DAE	Calibration Date
ELI V8.0 (20deg probe tilt)	EX3DV4 - SN7729	2024-01-22	DAE4 Sn1303	2023-11-20
ELI V8.0 (20deg probe tilt)	EX3DV4 - SN7764	2023-10-05	DAE4 Sn1303	2023-11-20

SAR Measurement Results

Scan Name	psSAR1g [W/kg]	psSAR10g [W/kg]
Combined Scan	0.942	0.227

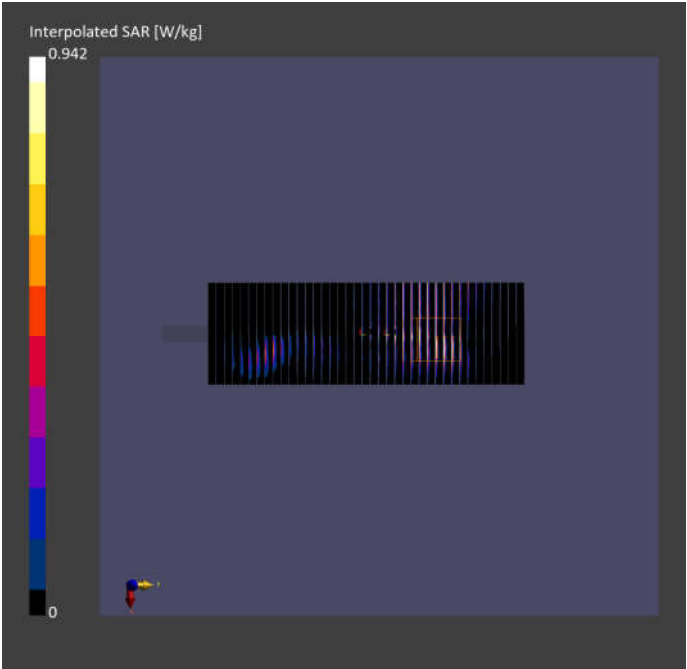

Case 5_Measurement Report for Multi-TX Evaluator

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	210.0 x 130.0 x 8.5	

Exposure Conditions


Phantom Section	Position	Test Distance [mm]	Band	Group	UID	Rev	Frequency [MHz]	Channel Number
Flat HSL	BACK	0.00	WLAN 2.4GHz	WLAN	10012	CAB	2462.000	11
Flat HSL	BACK	0.00	WLAN 5GHz	WLAN	10544	AAD	5290.000	58
Flat HSL	BACK	0.00	WLAN 5GHz	WLAN	10544	AAD	5775.000	155
Flat HSL	BACK	0.00	WLAN 5GHz / WLAN 2.4GHz	WLAN / WLAN	10544 / 10012	AAD / CAB	5775.000 / 2462.000	155 / 11

Hardware Setup

Phantom	Probe	Calibration Date	DAE	Calibration Date
ELI V8.0 (20deg probe tilt)	EX3DV4-SN7729	2024-01-22	DAE4 Sn1303	2023-11-20

SAR Measurement Results

Scan Name	psSAR1g [W/kg]	psSAR10g [W/kg]
Combined Scan	1.15	0.398

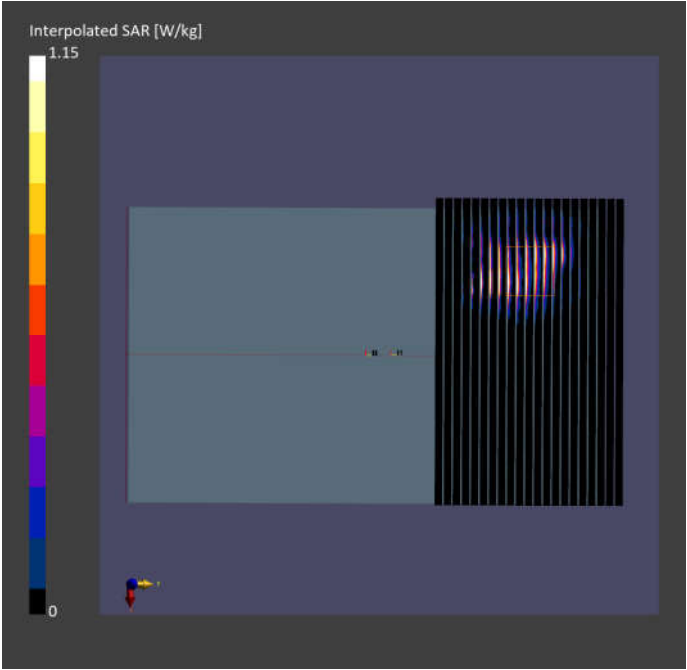

Case 6_Measurement Report for Multi-TX Evaluator

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	210.0 x 130.0 x 8.5	

Exposure Conditions


Phantom Section	Position	Test Distance [mm]	Band	Group	UID	Rev	Frequency [MHz]	Channel Number
Flat HSL	BACK	0.00	WLAN 2.4GHz	WLAN	10012	CAB	2462.000	11
Flat HSL	BACK	0.00	WLAN 5GHz	WLAN	10544	AAD	5290.000	58
Flat HSL	BACK	0.00	WLAN 5GHz	WLAN	10544	AAD	5775.000	155
Flat HSL	BACK	0.00	ISM 2.4 GHz Band	Bluetooth	10032	CAA	2441.000	39
Flat HSL	BACK	0.00	WLAN 5GHz / WLAN 2.4GHz	WLAN / WLAN	10544 / 10012	AAD / CAB	5775.000 / 2462.000	155 / 11

Hardware Setup

Phantom	Probe	Calibration Date	DAE	Calibration Date
ELI V8.0 (20deg probe tilt)	EX3DV4-SN7729	2024-01-22	DAE4 Sn1303	2023-11-20

SAR Measurement Results

Scan Name	psSAR1g [W/kg]	psSAR10g [W/kg]
Combined Scan	1.15	0.268

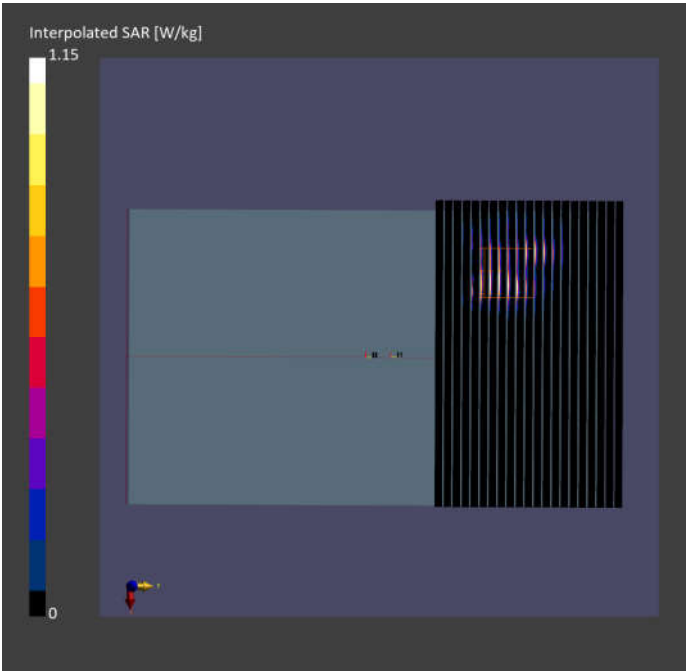

Case 7_Measurement Report for Multi-TX Evaluator

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	210.0 x 130.0 x 8.5	

Exposure Conditions


Phantom Section	Position	Test Distance [mm]	Band	Group	UID	Rev	Frequency [MHz]	Channel Number
Flat HSL	BACK	0.00	WLAN 2.4GHz	WLAN	10012	CAB	2462.000	11
Flat HSL	BACK	0.00	WLAN 5GHz	WLAN	10544	AAD	5290.000	58
Flat HSL	BACK	0.00	WLAN 5GHz	WLAN	10544	AAD	5775.000	155
Flat HSL	BACK	0.00	ISM 2.4 GHz Band	Bluetooth	10032	CAA	2441.000	39
Flat HSL	BACK	0.00	WLAN 2.4GHz / WLAN 5GHz	WLAN / WLAN	10012 / 10544	CAB / AAD	2462.000 / 5290.000	11 / 58

Hardware Setup

Phantom	Probe	Calibration Date	DAE	Calibration Date
ELI V8.0 (20deg probe tilt)	EX3DV4 - SN7729	2024-01-22	DAE4 Sn1303	2023-11-20

SAR Measurement Results

Scan Name	psSAR1g [W/kg]	psSAR10g [W/kg]
Combined Scan	1.45	0.524

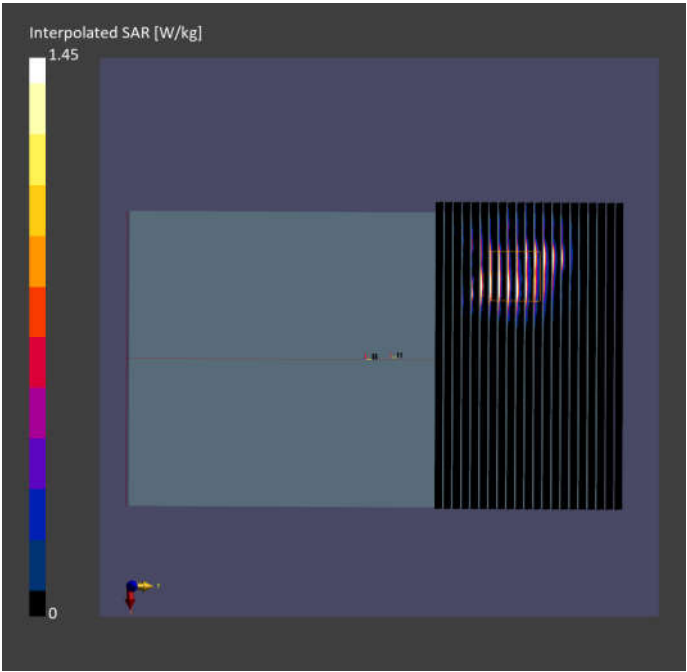

Case 8_Measurement Report for Multi-TX Evaluator

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	210.0 x 130.0 x 8.5	

Exposure Conditions


Phantom Section	Position	Test Distance [mm]	Band	Group	UID	Rev	Frequency [MHz]	Channel Number
Flat HSL	BACK	0.00	WLAN 2.4GHz	WLAN	10012	CAB	2462.000	11
Flat HSL	BACK	0.00	U-NII-7	WLAN	11026	AAB	6745.000	159
Flat HSL	BACK	0.00	U-NII-8	WLAN	11026	AAB	6905.000	191
Flat HSL	BACK	0.00	WLAN 2.4GHz / WLAN 2.4GHz	WLAN / WLAN	10012 / 10012	CAB / CAB	2462.000 / 2462.000	11 / 11

Hardware Setup

Phantom	Probe	Calibration Date	DAE	Calibration Date
ELI V8.0 (20deg probe tilt)	EX3DV4 - SN7729	2024-01-22	DAE4 Sn1303	2023-11-20
ELI V8.0 (20deg probe tilt)	EX3DV4 - SN7764	2023-10-05	DAE4 Sn1303	2023-11-20

SAR Measurement Results

Scan Name	psSAR1g [W/kg]	psSAR10g [W/kg]
Combined Scan	1.25	0.428

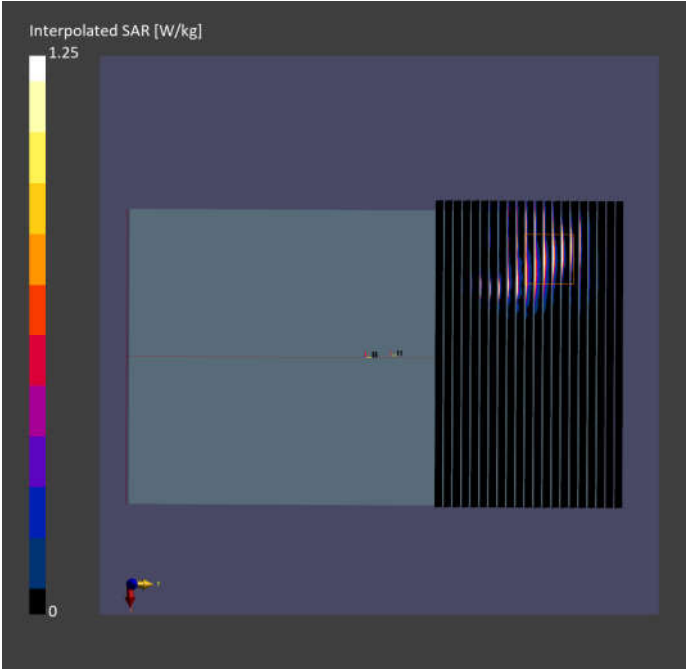

Case 9_Measurement Report for Multi-TX Evaluator

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	210.0 x 130.0 x 8.5	

Exposure Conditions


Phantom Section	Position	Test Distance [mm]	Band	Group	UID	Rev	Frequency [MHz]	Channel Number
Flat HSL	BACK	0.00	WLAN 2.4GHz	WLAN	10012	CAB	2462.000	11
Flat HSL	BACK	0.00	U-NII-7	WLAN	11026	AAB	6745.000	159
Flat HSL	BACK	0.00	U-NII-8	WLAN	11026	AAB	6905.000	191
Flat HSL	BACK	0.00	ISM 2.4 GHz Band	Bluetooth	10032	CAA	2441.000	39
Flat HSL	BACK	0.00	WLAN 2.4GHz / U-NII-8	WLAN / WLAN	10012 / 11026	CAB / AAB	2462.000 / 6905.000	11 / 191

Hardware Setup

Phantom	Probe	Calibration Date	DAE	Calibration Date
ELI V8.0 (20deg probe tilt)	EX3DV4 - SN7729	2024-01-22	DAE4 Sn1303	2023-11-20
ELI V8.0 (20deg probe tilt)	EX3DV4 - SN7764	2023-10-05	DAE4 Sn1303	2023-11-20

SAR Measurement Results

Scan Name	psSAR1g [W/kg]	psSAR10g [W/kg]
Combined Scan	1.16	0.322

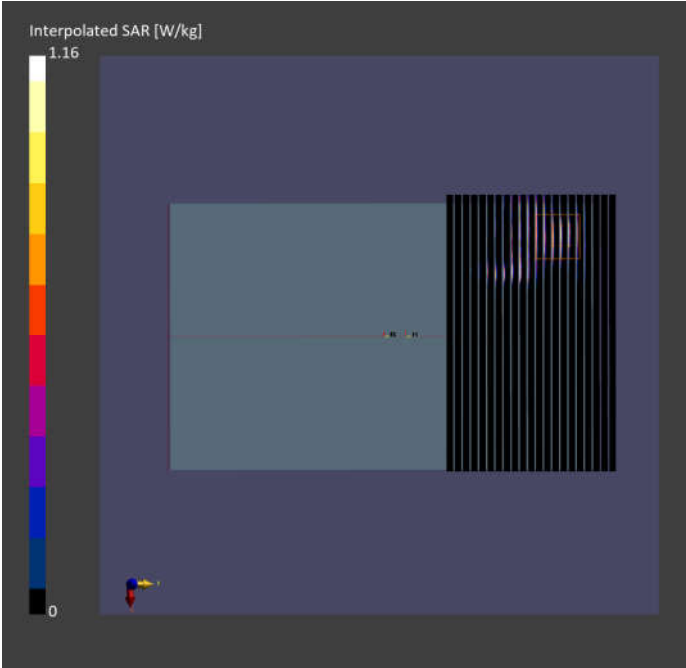

Case 10_Measurement Report for Multi-TX Evaluator

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	210.0 x 130.0 x 8.5	

Exposure Conditions


Phantom Section	Position	Test Distance [mm]	Band	Group	UID	Rev	Frequency [MHz]	Channel Number
Flat HSL	BACK	0.00	WLAN 2.4GHz	WLAN	10012	CAB	2462.000	11
Flat HSL	BACK	0.00	U-NII-7	WLAN	11026	AAB	6745.000	159
Flat HSL	BACK	0.00	U-NII-8	WLAN	11026	AAB	6905.000	191
Flat HSL	BACK	0.00	ISM 2.4 GHz Band	Bluetooth	10032	CAA	2441.000	39
Flat HSL	BACK	0.00	WLAN 2.4GHz / U-NII-8	WLAN / WLAN	10012 / 11026	CAB / AAB	2462.000 / 6985.000	11 / 191

Hardware Setup

Phantom	Probe	Calibration Date	DAE	Calibration Date
ELI V8.0 (20deg probe tilt)	EX3DV4 - SN7729	2024-01-22	DAE4 Sn1303	2023-11-20
ELI V8.0 (20deg probe tilt)	EX3DV4 - SN7764	2023-10-05	DAE4 Sn1303	2023-11-20

SAR Measurement Results

Scan Name	psSAR1g [W/kg]	psSAR10g [W/kg]
Combined Scan	1.26	0.429

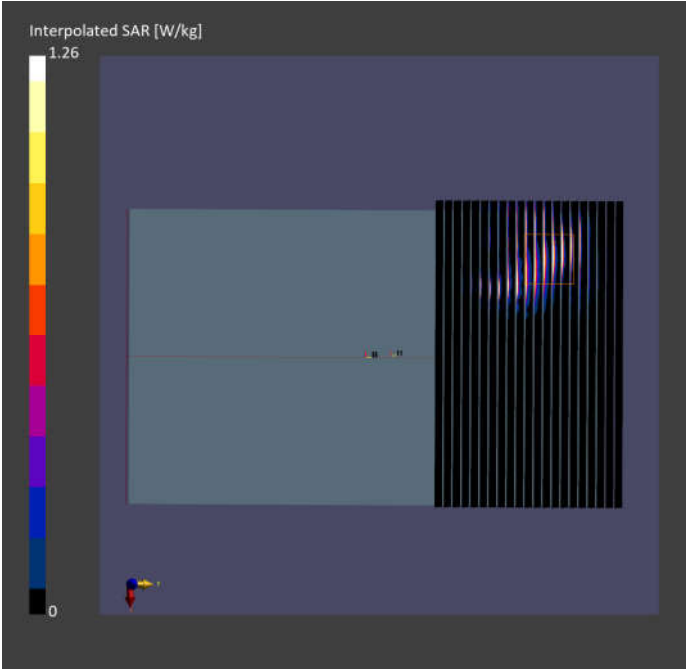

Case 11_Measurement Report for Multi-TX Evaluator

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	210.0 x 130.0 x 8.5	

Exposure Conditions


Phantom Section	Position	Test Distance [mm]	Band	Group	UID	Rev	Frequency [MHz]	Channel Number
Flat HSL	EDGE TOP	0.00	WLAN 2.4GHz	WLAN	10012	CAB	2412.000	1
Flat HSL	EDGE TOP	0.00	WLAN 2.4GHz	WLAN	10012	CAB	2437.000	6
Flat HSL	EDGE TOP	0.00	WLAN 5GHz	WLAN	10062	CAE	5300.000	60
Flat HSL	EDGE TOP	0.00	WLAN 5GHz	WLAN	10544	AAD	5775.000	155
Flat HSL	EDGE TOP	0.00	WLAN 5GHz / WLAN 2.4GHz	WLAN / WLAN	10544 / 10012	AAD / CAB	5775.000 / 2437.000	155 / 6

Hardware Setup

Phantom	Probe	Calibration Date	DAE	Calibration Date
ELI V8.0 (20deg probe tilt)	EX3DV4 - SN7729	2024-01-22	DAE4 Sn1303	2023-11-20

SAR Measurement Results

Scan Name	psSAR1g [W/kg]	psSAR10g [W/kg]
Combined Scan	1.32	0.331

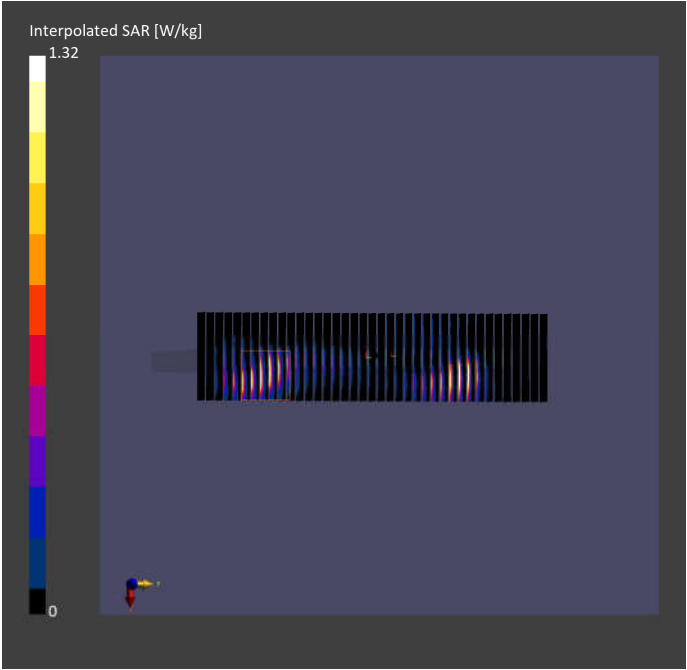

Case 12_Measurement Report for Multi-TX Evaluator

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	210.0 x 130.0 x 8.5	

Exposure Conditions


Phantom Section	Position	Test Distance [mm]	Band	Group	UID	Rev	Frequency [MHz]	Channel Number
Flat HSL	EDGE TOP	0.00	WLAN 2.4GHz	WLAN	10012	CAB	2437.000	6
Flat HSL	EDGE TOP	0.00	WLAN 5GHz	WLAN	10062	CAE	5300.000	60
Flat HSL	EDGE TOP	0.00	WLAN 5GHz	WLAN	10544	AAD	5775.000	155
Flat HSL	EDGE TOP	0.00	ISM 2.4 GHz Band	Bluetooth	10032	CAA	2441.000	39
Flat HSL	EDGE TOP	0.00	WLAN 5GHz / WLAN 2.4GHz	WLAN / WLAN	10544 / 10012	AAD / CAB	5775.000 / 2437.000	155 / 6

Hardware Setup

Phantom	Probe	Calibration Date	DAE	Calibration Date
ELI V8.0 (20deg probe tilt)	EX3DV4 - SN7729	2024-01-22	DAE4 Sn1303	2023-11-20

SAR Measurement Results

Scan Name	psSAR1g [W/kg]	psSAR10g [W/kg]
Combined Scan	1.21	0.323

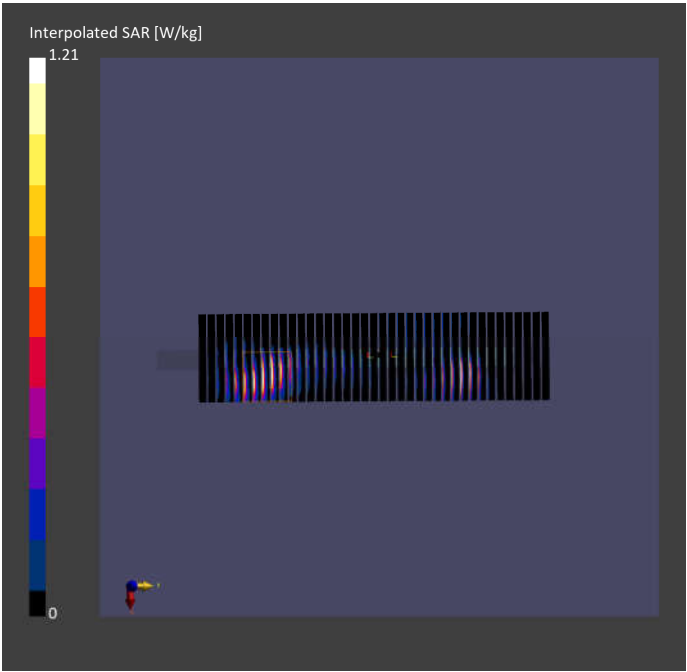

Case 13_Measurement Report for Multi-TX Evaluator

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	210.0 x 130.0 x 8.5	

Exposure Conditions


Phantom Section	Position	Test Distance [mm]	Band	Group	UID	Rev	Frequency [MHz]	Channel Number
Flat HSL	EDGE TOP	0.00	WLAN 2.4GHz	WLAN	10012	CAB	2437.000	6
Flat HSL	EDGE TOP	0.00	WLAN 5GHz	WLAN	10062	CAE	5300.000	60
Flat HSL	EDGE TOP	0.00	WLAN 5GHz	WLAN	10544	AAD	5775.000	155
Flat HSL	EDGE TOP	0.00	ISM 2.4 GHz Band	Bluetooth	10032	CAA	2441.000	39
Flat HSL	EDGE TOP	0.00	WLAN 5GHz / WLAN 2.4GHz	WLAN / WLAN	10544 / 10012	AAD / CAB	5775.000 / 2437.000	155 / 6

Hardware Setup

Phantom	Probe	Calibration Date	DAE	Calibration Date
ELI V8.0 (20deg probe tilt)	EX3DV4 - SN7729	2024-01-22	DAE4 Sn1303	2023-11-20

SAR Measurement Results

Scan Name	psSAR1g [W/kg]	psSAR10g [W/kg]
Combined Scan	1.17	0.416

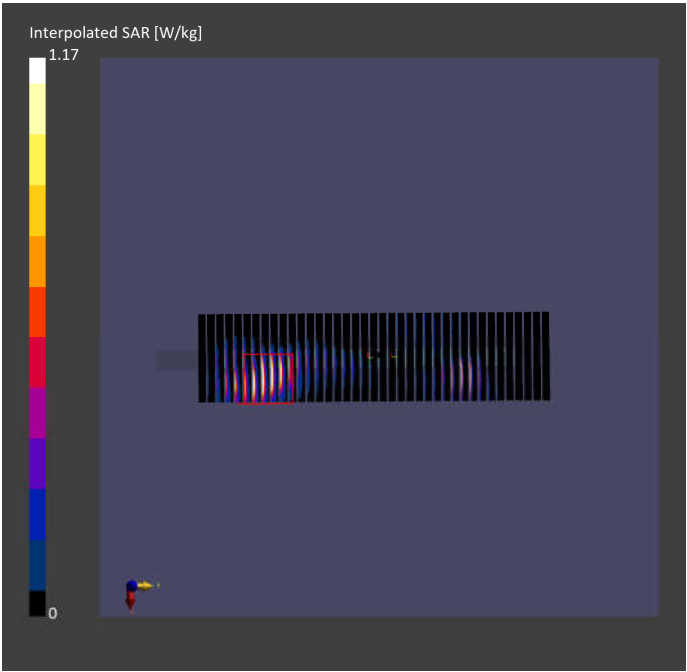

Case 14_Measurement Report for Multi-TX Evaluator

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	210.0 x 130.0 x 8.5	

Exposure Conditions


Phantom Section	Position	Test Distance [mm]	Band	Group	UID	Rev	Frequency [MHz]	Channel Number
Flat HSL	EDGE TOP	0.00	WLAN 2.4GHz	WLAN	100 12	CAB	2412.000	1
Flat HSL	EDGE TOP	0.00	WLAN 2.4GHz	WLAN	100 12	CAB	2437.000	6
Flat HSL	EDGE TOP	0.00	U-NII-7	WLAN	110 26	AAB	6745.000	159
Flat HSL	EDGE TOP	0.00	U-NII-8	WLAN	110 26	AAB	6905.000	191
Flat HSL	EDGE TOP	0.00	U-NII-7 / WLAN 2.4GHz	WLAN / WLAN	110 26 / 100 12	AAB / CAB	6745.000 / 2412.000	159 / 1

Hardware Setup

Phantom	Probe	Calibration Date	DAE	Calibration Date
ELI V8.0 (20deg probe tilt)	EX3DV4 - SN7764	2023-10-05	DAE4 Sn1303	2023-11-20
ELI V8.0 (20deg probe tilt)	EX3DV4 - SN7729	2024-01-22	DAE4 Sn1303	2023-11-20

SAR Measurement Results

Scan Name	psSAR1g [W/kg]	psSAR10g [W/kg]
Combined Scan	1.27	0.434

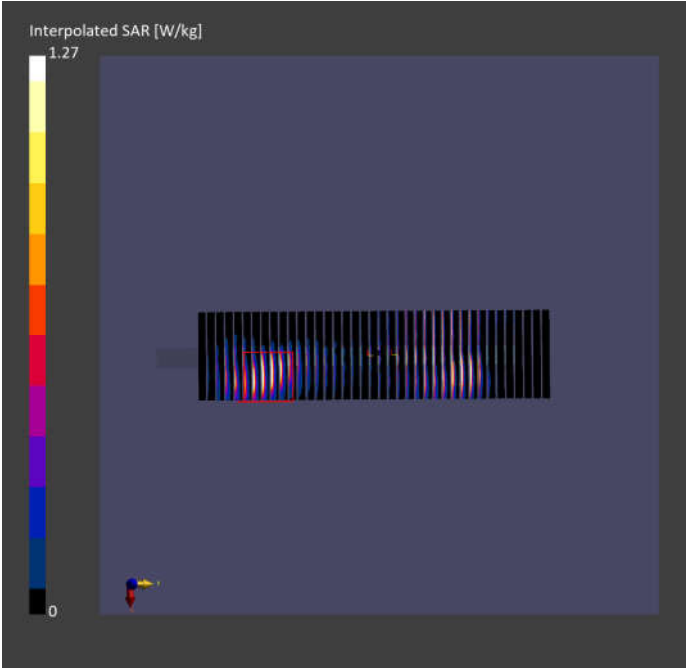

Case 15_Measurement Report for Multi-TX Evaluator

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	210.0 x 130.0 x 8.5	

Exposure Conditions


Phantom Section	Position	Test Distance [mm]	Band	Group	UID	Rev	Frequency [MHz]	Channel Number
Flat HSL	EDGE TOP	0.00	WLAN 2.4GHz	WLAN	100 12	CAB	2437.000	6
Flat HSL	EDGE TOP	0.00	U-NII-7	WLAN	110 26	AAB	6745.000	159
Flat HSL	EDGE TOP	0.00	U-NII-8	WLAN	110 26	AAB	6905.000	191
Flat HSL	EDGE TOP	0.00	ISM 2.4 GHz Band	Bluetooth	100 32	CAA	2441.000	39
Flat HSL	EDGE TOP	0.00	U-NII-7 / ISM 2.4 GHz Band	WLAN / Bluetooth	110 26 / 100 32	AAB / CAA	6745.000 / 2441.000	159 / 39

Hardware Setup

Phantom	Probe	Calibration Date	DAE	Calibration Date
ELI V8.0 (20deg probe tilt)	EX3DV4 - SN7764	2023-10-05	DAE4 Sn1303	2023-11-20
ELI V8.0 (20deg probe tilt)	EX3DV4 - SN7729	2024-01-22	DAE4 Sn1303	2023-11-20

SAR Measurement Results

Scan Name	psSAR1g [W/kg]	psSAR10g [W/kg]
Combined Scan	1.22	0.425

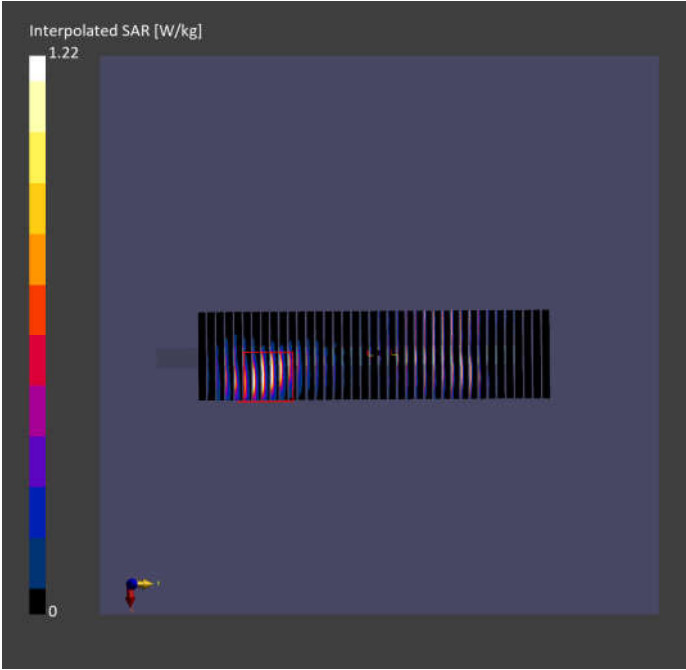

Case 16_Measurement Report for Multi-TX Evaluator

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	210.0 x 130.0 x 8.5	

Exposure Conditions


Phantom Section	Position	Test Distance [mm]	Band	Group	UID	Rev	Frequency [MHz]	Channel Number
Flat HSL	EDGE TOP	0.00	WLAN 2.4GHz	WLAN	10012	CAB	2412.000	1
Flat HSL	EDGE TOP	0.00	U-NII-7	WLAN	11026	AAB	6745.000	159
Flat HSL	EDGE TOP	0.00	U-NII-8	WLAN	11026	AAB	6905.000	191
Flat HSL	EDGE TOP	0.00	ISM 2.4 GHz Band	Bluetooth	10032	CAA	2441.000	39
Flat HSL	EDGE TOP	0.00	ISM 2.4 GHz Band / U-NII-7	Bluetooth / WLAN	10032 / 11026	CAA / AAB	2441.000 / 6745.000	39 / 159

Hardware Setup

Phantom	Probe	Calibration Date	DAE	Calibration Date
ELI V8.0 (20deg probe tilt)	EX3DV4 - SN7729	2024-01-22	DAE4 Sn1303	2023-11-20
ELI V8.0 (20deg probe tilt)	EX3DV4 - SN7764	2023-10-05	DAE4 Sn1303	2023-11-20

SAR Measurement Results

Scan Name	psSAR1g [W/kg]	psSAR10g [W/kg]
Combined Scan	1.26	0.374

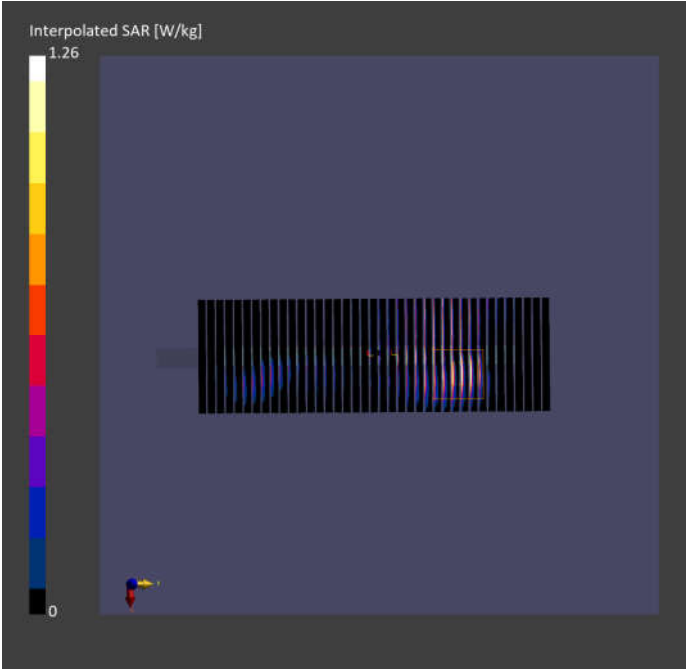

Case 17_Measurement Report for Multi-TX Evaluator

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	210.0 x 130.0 x 8.5	

Exposure Conditions


Phantom Section	Position	Test Distance [mm]	Band	Group	UID	Rev	Frequency [MHz]	Channel Number
Flat HSL	BACK	0.00	WLAN 5GHz	WLAN	10544	AAD	5290.000	58
Flat HSL	BACK	0.00	WLAN 5GHz	WLAN	10544	AAD	5775.000	155
Flat HSL	BACK	0.00	ISM 2.4 GHz Band	Bluetooth	10032	CAA	2441.000	39
Flat HSL	BACK	0.00	WLAN 5GHz / WLAN 5GHz	WLAN / WLAN	10544 / 10544	AAD / AAD	5775.000 / 5290.000	155 / 58

Hardware Setup

Phantom	Probe	Calibration Date	DAE	Calibration Date
ELI V8.0 (20deg probe tilt)	EX3DV4 - SN7729	2024-01-22	DAE4 Sn1303	2023-11-20

SAR Measurement Results

Scan Name	psSAR1g [W/kg]	psSAR10g [W/kg]
Combined Scan	1.57	0.520

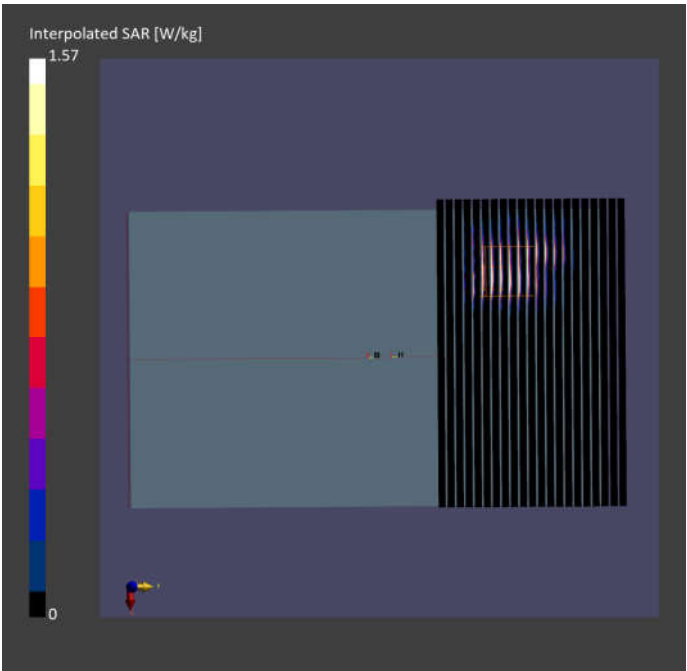

Case 18_Measurement Report for Multi-TX Evaluator

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	210.0 x 130.0 x 8.5	

Exposure Conditions


Phantom Section	Position	Test Distance [mm]	Band	Group	UID	Rev	Frequency [MHz]	Channel Number
Flat HSL	BACK	0.00	WLAN 5GHz	WLAN	10544	AAD	5290.000	58
Flat HSL	BACK	0.00	U-NII-7	WLAN	11026	AAB	6745.000	159
Flat HSL	BACK	0.00	U-NII-5	WLAN	11026	AAB	6425.000	95
Flat HSL	BACK	0.00	ISM 2.4 GHz Band	Bluetooth	10032	CAA	2441.000	39
Flat HSL	BACK	0.00	U-NII-7 / WLAN 5GHz	WLAN / WLAN	11026 / 10544	AAB / AAD	6745.000 / 5290.000	159 / 58

Hardware Setup

Phantom	Probe	Calibration Date	DAE	Calibration Date
ELI V8.0 (20deg probe tilt)	EX3DV4 - SN7764	2023-10-05	DAE4 Sn1303	2023-11-20
ELI V8.0 (20deg probe tilt)	EX3DV4 - SN7729	2024-01-22	DAE4 Sn1303	2023-11-20

SAR Measurement Results

Scan Name	psSAR1g [W/kg]	psSAR10g [W/kg]
Combined Scan	1.52	0.417

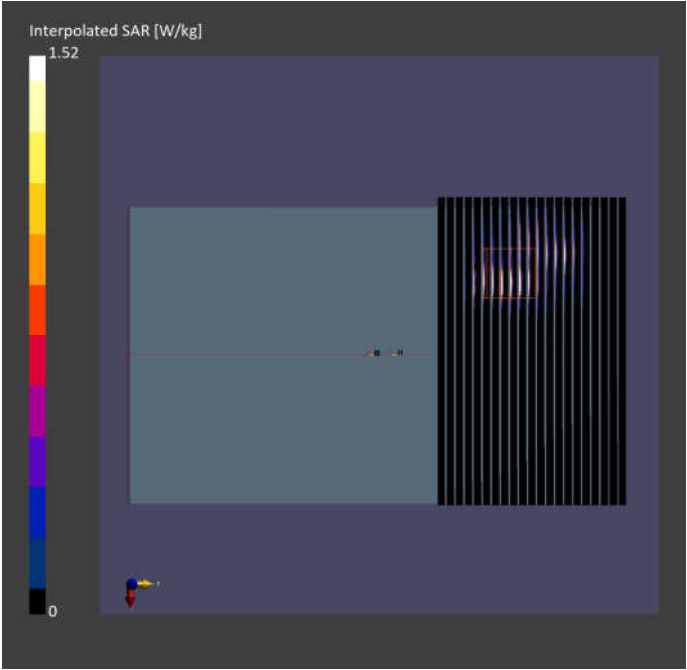

Case 19_Measurement Report for Multi-TX Evaluator

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	210.0 x 130.0 x 8.5	

Exposure Conditions


Phantom Section	Position	Test Distance [mm]	Band	Group	UID	Rev	Frequency [MHz]	Channel Number
Flat HSL	EDGE TOP	0.00	WLAN 5GHz	WLAN	105 44	AAD	5290.000	58
Flat HSL	EDGE TOP	0.00	WLAN 5GHz	WLAN	105 44	AAD	5690.000	138
Flat HSL	EDGE TOP	0.00	WLAN 5GHz	WLAN	105 44	AAD	5775.000	155
Flat HSL	EDGE TOP	0.00	WLAN 5GHz	WLAN	100 62	CAE	5300.000	60
Flat HSL	EDGE TOP	0.00	ISM 2.4 GHz Band	Bluetooth	100 32	CAA	2441.000	39
Flat HSL	EDGE TOP	0.00	WLAN 5GHz / WLAN 5GHz	WLAN / WLAN	100 62 / 105 44	CAE / AAD	5300.000 / 5290.000	60 / 58

Hardware Setup

Phantom	Probe	Calibration Date	DAE	Calibration Date
ELI V8.0 (20deg probe tilt)	EX3DV4 - SN7729	2024-01-22	DAE4 Sn1303	2023-11-20

SAR Measurement Results

Scan Name	psSAR1g [W/kg]	psSAR10g [W/kg]
Combined Scan	1.26	0.333

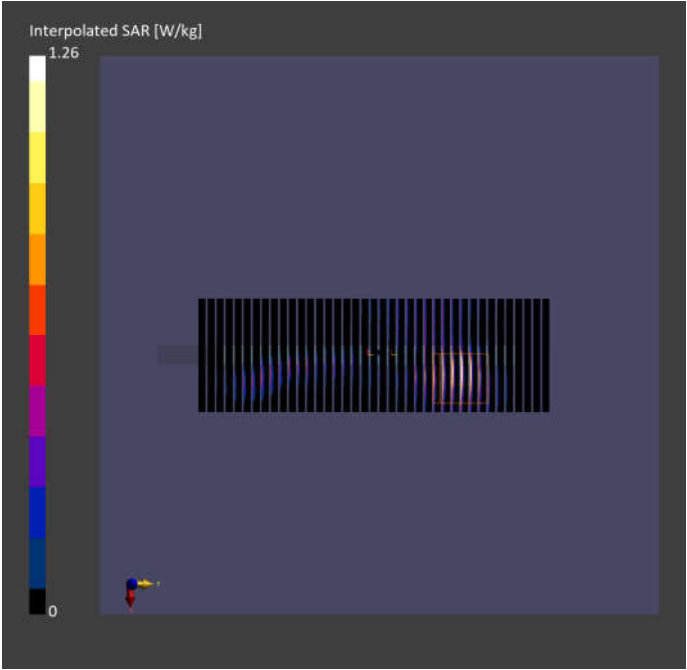

Case 20_Measurement Report for Multi-TX Evaluator

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	210.0 x 130.0 x 8.5	

Exposure Conditions

Phantom Section	Position	Test Distance [mm]	Band	Group	UID	Rev	Frequency [MHz]	Channel Number
Flat HSL	EDGE	0.00	WLAN 5GHz	WLAN	105	AAD	5290.000	58
	TOP				44			
Flat HSL	EDGE	0.00	WLAN 5GHz	WLAN	100	CAE	5300.000	60
	TOP				62			
Flat HSL	EDGE	0.00	U-NII-7	WLAN	110	AAB	6745.000	149
	TOP				26			
Flat HSL	EDGE	0.00	U-NII-8	WLAN	110	AAB	6905.000	191
	TOP				26			
Flat HSL	EDGE	0.00	ISM 2.4 GHz	Bluetooth	100	CAA	2441.000	39
	TOP		Band		32			
Flat HSL	EDGE	0.00	WLAN 5GHz /	WLAN /	100	CAE / AAD	5300.000 /	60 / 58
	TOP		WLAN 5GHz	WLAN	62 /		5290.000	
					105			
					44			

Hardware Setup

Phantom	Probe	Calibration Date	DAE	Calibration Date
ELI V8.0 (20deg probe tilt)	EX3DV4 - SN7764	2023-10-05	DAE4 Sn1303	2023-11-20
ELI V8.0 (20deg probe tilt)	EX3DV4 - SN7729	2024-01-22	DAE4 Sn1303	2023-11-20

SAR Measurement Results

Scan Name	psSAR1g [W/kg]	psSAR10g [W/kg]
Combined Scan	1.33	0.355

