

Page: 1 of 255

RF Exposure report





The following samples were submitted and identified on behalf of the client as:

Product Name Portable Tablet Computer

Brand Name Lenovo
Model No. TB350XU

Applicant Lenovo (Shanghai) Electronics Technology Co., Ltd.

Section 304-305, Building No. 4, # 222, Meiyue Road,

China (Shanghai) Pilot Free Trade Zone

Standards IEEE/ANSI C95.1-1992, IEEE 1528-2013

FCC ID O57TB350XU

Date of EUT Receipt Jul. 12, 2022

Date of Test(s) Aug. 10, 2022 ~ Aug. 19, 2022

Date of Issue Aug. 31, 2022

In the configuration tested, the EUT complied with the standards specified above.

Remarks:

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Taiwan Ltd. Central RF Lab or testing done by SGS Taiwan Ltd. Central RF Lab in connection with distribution or use of the product described in this report must be approved by SGS Taiwan Ltd. Central RF Lab in writing.

Signed on behalf of SGS

Clerk / Ruby Ou	PM / Kiki Lin	Approved By / John Yeh
Ruby Ou	Liki Lin	John Teh

Date: Aug. 31, 2022

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

303 Idiwan Eta.



Page: 2 of 255

Revision History

Report Number	Revision	Description	Issue Date	Revised By	Remark
TESA2207000200ES	00	Initial creation of document	Aug. 26, 2022	Ruby Ou	*
TESA2207000200ES	01	 Modify The block diagram of system check in page 15. Add appendix D 	Aug. 31, 2022	Ruby Ou	
Net					

Note:

The mark " * " is the revised version of the report due to comments submitted by the certification.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at the times-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of locuments in the limits of liability, indemnification and purisdiction issues to the company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. prosecuted to the fullest extent of the law.



Page: 3 of 255

Contents

1	GENERAL INFORMATION	5
	1.1 Test Methodology	5
	1.2 Description of EUT	
	1.3 Maximum value	8
2	MEASUREMENT SYSTEM	9
	2.1 Test Facility	9
	2.2 SAR System	
3	SAR SYSTEM VERIFICATION	
	3.1 Tissue Simulating Liquid	
	3.2 Tissue Simulant Liquid measurement	
	3.3 Measurement results of Tissue Simulant Liquid	
	3.4 The composition of the tissue simulating liquid:	
	3.5 System check	
	3.6 System check results	16
4	TEST CONFIGURATIONS	
	4.1 Test Environment	
	4.2 Test Note	17
	4.3 Test position	24
	4.4 Test limit	
	4.5 Proximity sensor operation description	
5	Maximum OUTPUT POWER	51
	5.1 GSM/GPRS/EDGE	
	5.2 WCDMA	
	5.3 FDD LTE	60
	5.4 TDD LTE	146
	5.5 LTE DL CA	158
	5.6 LTE DL MIMO	163
	5.7 WLAN	164
	5.8 Bluetooth	
	5.9 BLE	169
6	SUMMARY OF RESULTS	
	6.1 Decision rules	174
	6.2 Summary of SAR Results	174
	6.3 Reporting statements of conformity	180
	6.4 Conclusion	
7	SIMULTANEOUS TRANSMISSION ANALYSIS	
	7.1 Simultaneous Transmission Scenarios:	181
	7.2 Estimated SAR calculation	182
	7.3 SPLSR evaluation and analysis	182
	7.4 Conclusion	
8	INSTRUMENTS LIST	
9	UNCERTAINTY BUDGET	
10	SAR MEASUREMENT results	
11	SAR SYSTEM check results	245

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

所持力有成功 * 地報告記术性到规成之株血程具 * 門中却成体血程体出列人* 全報音术整本公司音曲正可 * 不可能力接致 * This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be responsible to the full extent of the law. prosecuted to the fullest extent of the law.



Page: 4 of 255

12	AP	PENDIXES	255
	12.1	SAR_Appendix A Photographs	255
		SAR_Appendix B DAE & Probe Cal. Certificate	
	12.3	SAR_Appendix C Phantom Description & Dipole Cal. Certificate	255
		SAR_Appendix D Modulation system check	



Page: 5 of 255

GENERAL INFORMATION

1.1 Test Methodology

The SAR testing method and procedure for this device is in accordance with the following standards:

IEEE/ANSI C95.1-1992

IEEE 1528-2013

KDB447498D01v06

KDB865664D01v01r04

KDB865664D02v01r02

KDB616217D04v01r02

KDB941225D01v03r01

KDB941225D05v02r05

KDB941225D05Av01r02

KDB248227D01v02r01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw



Page: 6 of 255

Description of EUT

Product Name	Portable Tablet Computer		
Brand Name	Lenovo		
Model No.	TB350XU		
FCC ID	O57TB350XU		
Mode	GSM GPRS EDGE RMC 12.2Kbps HSDPA HSUPA HSPA+ DC-HSDPA LTE: QPSK, 16QAM, 64QAM WLAN: 802.11a/b/g/n/ac HT20/HT40/VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE		
CS	GSM (DTM multi class B)	1/8.3	
	GPRS (support multi class 12 max)	1/2 (1Dn4UP) 1/2.76 (1Dn3UP) 1/4.1 (1Dn2UP) 1/8.3 (1Dn1UP)	
Duty Cycle	EDGE (support multi class 12 max)	1/2 (1Dn4UP) 1/2.76 (1Dn3UP) 1/4.1 (1Dn2UP) 1/8.3 (1Dn1UP)	
	WCDMA	1	
	LTE FDD	1	
	LTE TDD	0.633	
	WLAN802.11	Please refer to page 170-173	
	Bluetooth	0.765	
	GSM850	824-849	
Supported radios (TX Frequency	GSM1900	1850-1910	
Range, MHz)	WCDMA Band II	1850-1910	
	WCDMA Band IV	1710-1755	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at the times-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. prosecuted to the fullest extent of the law.



Page: 7 of 255

	WCDMA Band V	824-849
	LTE FDD Band 2	1850-1910
	LTE FDD Band 4	1710-1755
	LTE FDD Band 5	824-849
66	LTE FDD Band 7	2500-2570
	LTE FDD Band 12	699-716
	LTE FDD Band 13	777-787
Supported radios (TX Frequency	LTE FDD Band 25	1850-1915
Range, MHz)	LTE FDD Band 26	814-849
	LTE TDD Band 38	2570-2620
	LTE TDD Band 41	2496-2690
	LTE FDD Band 66	1710-1780
	802.11 b/g/n	2.4GHz (2400.0 – 2483.5 MHz)
	802.11a/n/ac	5.2GHz (5150.0 –5350.0 MHz) 5.6GHz (5470.0 – 5725.0 MHz) 5.8GHz (5725.0 – 5850.0 MHz)
	Bluetooth 5.2	2.4GHz (2400.0 – 2483.5 MHz)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at the times-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of locuments in the limits of liability, indemnification and purisdiction issues to the company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. prosecuted to the fullest extent of the law.



Page: 8 of 255

1.3 Maximum value

Summary of Maximum SAR Value		
	Highest SAR 1g	
Mode	Body	
	(W/kg)	
LTE _Band 12	1.19	

Summary of Maximum SAR				
	Highest SAR 1g			
Mode	Body			
	(W/kg)			
Bluetooth(GFSK)	0.17			
2.4G WLAN	0.52			
5G WLAN	0.77			



Page: 9 of 255

MEASUREMENT SYSTEM

2.1 **Test Facility**

Laboratory	Test Site Address	Test Site Name	FCC Designation number	IC CAB identifier
SGS Taiwan Ltd. Central RF Lab. (TAF code 3702)	1F, No. 8, Alley 15, Lane 120, Sec. 1, NeiHu Road, Neihu	SAR 2	TW0029	
	District, Taipei City, 11493, Taiwan.	SAR 6		
	, , , , ,	SAR 1		
	Township, Taoyuan County, 33383, Taiwan	SAR 4	TW0028	TW3702
	No.134, Wu Kung Road,	SAR 3		
	New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan	SAR 7	TW0027	

Note: Test site name is remarked on the equipment list in each section of this report as an indication where measurements occurred in specific test site and address.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

所持力有成功 * 地報告記术性到规成之株血程具 * 門中却成体血程体出列人* 全報音术整本公司音曲正可 * 不可能力接致 * This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be responsible to the full extent of the law. prosecuted to the fullest extent of the law.




Page: 10 of 255

2.2 SAR System

Block Diagram (DASY6)

The DASY system used for performing compliance tests consists of the following items:

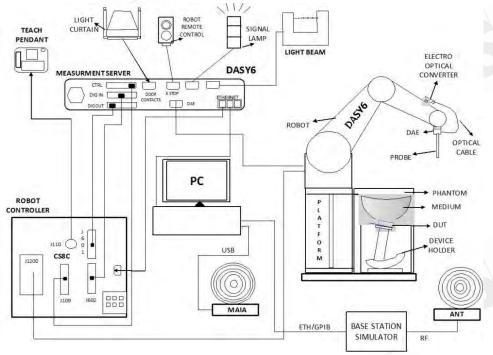

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy
 of the probe positioning.
- A computer running Windows 10 and the DASY6 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is a drawn to the limitation of liability, indemflication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279 f (886-2) 2298-0488 www.sgs.com.tw



Page: 11 of 255

FX3DV4 F-Field Probe

EX3DV4 E-F	leid Probe	
Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	Basic Broad Band Calibration in air Conversion Factors (CF) for HSL 750/835/1750/1900/2450/2600/5250/5600/5750 MHz Additional CF for other liquids and frequencies upon request	
Frequency	10 MHz to > 6 GHz	
Directivity	± 0.3 dB in HSL (rotation around probe axis)	
	± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic	$10 \mu W/g \text{ to > } 100 \text{ mW/g}$	
Range	Linearity: ± 0.2 dB (noise: typically < 1 μW/g)	
Dimensions	Tip diameter: 2.5 mm	
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.	

f (886-2) 2298-0488

台灣檢驗科技股份有限公司



Page: 12 of 255

PHANTOM (FI I)

PHANTOW (E	.LI)
Model	ELI
Construction	The ELI phantom is used for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.
Shell	2 ± 0.2 mm
Thickness	
Filling Volume	Approx. 30 liters
Dimensions	Major axis: 600 mm
	Minor axis: 400 mm

DEVICE HOLDER (FLI)

DEVICE HOLDER (LLI)				
Construction	The device holder (Supporter) for Notebook is made by POM (polyoxymethylene resin), which is non-metal and non-conductive. The height can be adjusted to fit varies kind of notebooks.			
		Device Holder		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SCST Stawan Ltd. No 134 Wit King Road New Taipoi Industrial Park Withu District New Taipoi City, Taipon City, Taipon



Page: 13 of 255

3 SAR SYSTEM VERIFICATION

3.1 Tissue Simulating Liquid

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with homogeneous tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15cm.

3.2 Tissue Simulant Liquid measurement

The dielectric properties for this Head-simulant fluid were measured by using the SPEAG Dielectric Assessment Kit (DAKS-3.5)

All dielectric parameters of tissue simulates were measured within 24 hours of SAR measurements. The measured conductivity and permittivity are all within \pm 5% of the target values.

3.3 Measurement results of Tissue Simulant Liquid

Measured Frequency (MHz)	Liquid Temp. (°C)	Target Dielectric Constant, εr	Target Conductivity, σ (S/m)	Measured Dielectric Constant, εr	Measured Conductivity, σ (S/m)	% dev εr	% dev σ	Limit	Measurement Date
704	22.6°C	42.145	0.887	41.627	0.882	-1.23%	-0.56%	± 5%	Aug. 10, 2022
707.5	22.6°C	42.127	0.887	41.625	0.883	-1.19%	-0.47%	± 5%	Aug. 10, 2022
711	22.6°C	42.108	0.887	41.586	0.884	-1.24%	-0.38%	± 5%	Aug. 10, 2022
750	22.6°C	41.900	0.890	41.380	0.886	-1.24%	-0.45%	± 5%	Aug. 10, 2022
782	22.6°C	41.749	0.894	41.232	0.889	-1.24%	-0.53%	± 5%	Aug. 10, 2022
821.5	22.3°C	41.564	0.898	41.077	0.894	-1.17%	-0.49%	± 5%	Aug. 11, 2022
824.2	22.3°C	41.551	0.899	41.069	0.895	-1.16%	-0.41%	± 5%	Aug. 11, 2022
826.4	22.3°C	41.540	0.899	41.042	0.896	-1.20%	-0.33%	± 5%	Aug. 11, 2022
829	22.3°C	41.528	0.899	41.038	0.896	-1.18%	-0.37%	± 5%	Aug. 11, 2022
831.5	22.3°C	41.516	0.900	41.027	0.897	-1.18%	-0.29%	± 5%	Aug. 11, 2022
835	22.3°C	41.500	0.900	41.022	0.898	-1.15%	-0.22%	± 5%	Aug. 11, 2022
836.5	22.3°C	41.500	0.902	41.021	0.898	-1.15%	-0.40%	± 5%	Aug. 11, 2022
836.6	22.3°C	41.500	0.902	41.020	0.898	-1.16%	-0.41%	± 5%	Aug. 11, 2022
841.5	22.3°C	41.500	0.907	41.019	0.902	-1.16%	-0.55%	± 5%	Aug. 11, 2022
844	22.3°C	41.500	0.910	41.010	0.905	-1.18%	-0.52%	± 5%	Aug. 11, 2022
846.6	22.3°C	41.500	0.912	40.994	0.908	-1.22%	-0.49%	± 5%	Aug. 11, 2022
848.8	22.3°C	41.500	0.915	40.993	0.911	-1.22%	-0.42%	± 5%	Aug. 11, 2022
1712.4	22.6°C	40.125	1.350	40.366	1.354	0.60%	0.30%	± 5%	Aug. 12, 2022
1720	22.6°C	40.114	1.354	40.359	1.358	0.61%	0.27%	± 5%	Aug. 12, 2022
1732.4	22.6°C	40.107	1.361	40.335	1.365	0.57%	0.30%	± 5%	Aug. 12, 2022
1732.5	22.6°C	40.096	1.361	40.317	1.366	0.55%	0.34%	± 5%	Aug. 12, 2022
1745	22.6°C	40.079	1.369	40.307	1.372	0.57%	0.25%	± 5%	Aug. 12, 2022
1750	22.6°C	40.071	1.371	40.296	1.375	0.56%	0.26%	± 5%	Aug. 12, 2022
1752.6	22.6°℃	40.068	1.373	40.290	1.377	0.55%	0.30%	± 5%	Aug. 12, 2022
1770	22.6°C	40.043	1.383	40.287	1.387	0.61%	0.30%	± 5%	Aug. 12, 2022
1850.2	22.8°℃	40.000	1.400	40.243	1.402	0.61%	0.14%	± 5%	Aug. 13, 2022
1852.4	22.8℃	40.000	1.400	40.236	1.402	0.59%	0.14%	± 5%	Aug. 13, 2022
1860	22.8℃	40.000	1.400	40.224	1.403	0.56%	0.21%	± 5%	Aug. 13, 2022
1880	22.8°C	40.000	1.400	40.220	1.404	0.55%	0.29%	± 5%	Aug. 13, 2022
1882.5	22.8℃	40.000	1.400	40.215	1.405	0.54%	0.36%	± 5%	Aug. 13, 2022
1900	22.8℃	40.000	1.400	40.212	1.406	0.53%	0.43%	± 5%	Aug. 13, 2022
1905	22.8℃	40.000	1.400	40.204	1.407	0.51%	0.50%	± 5%	Aug. 13, 2022
1907.6	22.8℃	40.000	1.400	40.203	1.408	0.51%	0.57%	± 5%	Aug. 13, 2022
1909.8	22.8°C	40.000	1.400	40.201	1.408	0.50%	0.57%	± 5%	Aug. 13, 2022

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

「限公司 t(

t (886-2) 2299-3279 f (886-2) 2298-0488 www.sgs.com.tw



Page: 14 of 255

Measured Frequency (MHz)	Liquid Temp. (°C)	Target Dielectric Constant, εr	Target Conductivity, σ (S/m)	Measured Dielectric Constant, εr	Measured Conductivity, σ (S/m)	% dev εr	% dev σ	Limit	Measuremer Date
2402	22.6°℃	39.282	1.757	39.750	1.773	1.19%	0.88%	± 5%	Aug. 14, 202
2412	22.6°C	39.265	1.766	39.721	1.782	1.16%	0.89%	± 5%	Aug. 14, 202
2437	22.6°℃	39.222	1.788	39.713	1.805	1.25%	0.92%	± 5%	Aug. 14, 202
2441	22.6°℃	39.215	1.792	39.689	1.807	1.21%	0.84%	± 5%	Aug. 14, 202
2450	22.6°C	39.200	1.800	39.686	1.817	1.24%	0.94%	± 5%	Aug. 14, 202
2462	22.6°℃	39.184	1.813	39.650	1.828	1.19%	0.84%	± 5%	Aug. 14, 202
2480	22.6°℃	39.160	1.832	39.642	1.848	1.23%	0.87%	± 5%	Aug. 14, 202
2506	22.5°C	39.125	1.860	39.603	1.876	1.22%	0.87%	± 5%	Aug. 15, 202
2510	22.5°C	39.120	1.864	39.574	1.882	1.16%	0.97%	± 5%	Aug. 15, 20
2535	22.5°C	39.087	1.891	39.571	1.908	1.24%	0.92%	± 5%	Aug. 15, 20
2549.5	22.5°C	39.067	1.906	39.557	1.924	1.25%	0.94%	± 5%	Aug. 15, 20
2560	22.5°C	39.053	1.917	39.542	1.935	1.25%	0.92%	± 5%	Aug. 15, 20
2580	22.5°C	39.027	1.939	39.511	1.955	1.24%	0.84%	± 5%	Aug. 15, 20
2593	22.5°C	39.009	1.953	39.477	1.970	1.20%	0.89%	± 5%	Aug. 15, 20
2595	22.5°C	39.007	1.955	39.471	1.971	1.19%	0.84%	± 5%	Aug. 15, 20
2600	22.5°C	39.000	1.960	39.468	1.978	1.20%	0.92%	± 5%	Aug. 15, 20
2610	22.5°C	38.988	1.971	39.467	1.989	1.23%	0.91%	± 5%	Aug. 15, 20
2636.5	22.5°C	38.954	2.000	39.402	2.019	1.15%	0.94%	± 5%	Aug. 15, 20
2680	22.5°C	38.900	2.048	39.367	2.067	1.20%	0.93%	± 5%	Aug. 15, 20
2506	22.2°C	39.125	1.860	39.603	1.876	1.22%	0.87%	± 5%	Aug. 16, 20
2510	22.2°C	39.120	1.864	39.593	1.880	1.21%	0.86%	± 5%	Aug. 16, 20
2535	22.2°C	39.087	1.891	39.544	1.908	1.17%	0.92%	± 5%	Aug. 16, 20
2549.5	22.2°C	39.067	1.906	39.540	1.924	1.21%	0.94%	± 5%	Aug. 16, 20
2560	22.2°C	39.053	1.917	39.510	1.934	1.17%	0.87%	± 5%	Aug. 16, 20
2580	22.2°C	39.027	1.939	39.503	1.956	1.22%	0.89%	± 5%	Aug. 16, 20
2593	22.2°C	39.009	1.953	39.497	1.970	1.25%	0.89%	± 5%	Aug. 16, 20
2595	22.2°C	39.007	1.955	39.471	1.972	1.19%	0.89%	± 5%	Aug. 16, 20
2600	22.2°C	39.000	1.960	39.460	1.977	1.18%	0.87%	± 5%	Aug. 16, 20
2610	22.2°C	38.988	1.971	39.451	1.989	1.19%	0.91%	± 5%	Aug. 16, 20
2636.5	22.2°C	38.954	2.000	39.434	2.017	1.23%	0.84%	± 5%	Aug. 16, 20
2680	22.2°C	38.900	2.048	39.359	2.066	1.18%	0.88%	± 5%	Aug. 16, 20
5180	22.6°C	36.020	4.639	36.531	4.692	1.42%	1.14%	± 5%	Aug. 17, 20
5240	22.6°C	35.960	4.700	36.478	4.751	1.44%	1.09%	± 5%	Aug. 17, 20
5250	22.6°C	35.950	4.710	36.453	4.760	1.40%	1.06%	± 5%	Aug. 17, 20
5300	22.6°C	35.900	4.760	36.406	4.814	1.41%	1.13%	± 5%	Aug. 17, 20
5510	22.9°C	35.635	4.976	36.152	5.030	1.45%	1.10%	± 5%	Aug. 18, 20
5590	22.9°C	35.515	5.060	35.998	5.116	1.36%	1.12%	± 5%	Aug. 18, 20
5600	22.9°C	35.500	5.070	36.008	5.124	1.43%	1.07%	± 5%	Aug. 18, 20
5670	22.9°C	35.430	5.140	35.930	5.198	1.41%	1.13%	± 5%	Aug. 18, 20
5750	22.4°C	35.350	5.220	35.854	5.275	1.43%	1.05%	± 5%	Aug. 19, 20
5755	22.4°C	35.345	5.225	35.843	5.285	1.41%	1.15%	± 5%	Aug. 19, 20
5795	22.4°C	35.305	5.265	35.796	5.322	1.39%	1.08%	± 5%	Aug. 19, 20



Page: 15 of 255

The composition of the tissue simulating liquid:

Simulating Liquids for 600 MHz -10 GHz. Manufactured by SPEAG:


Broad-band head	SPEAG Product	Frequency range (MHz)	Main Ingredients
tissue simulating liquids	HBBL600- 10000V6	600 - 10000	Water, Oil

3.5 System check

The microwave circuit arrangement for system check is sketched in below. The daily system accuracy verification occurs within the flat section of the SAM phantom and ELI phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% from the target

The tests were conducted on the same days as the measurement of the DUT. The obtained results from the system accuracy verification are displayed with SAR values normalized to 1W forward power delivered to the dipole.

During the tests, the liquid depth from the center of the flat phantom to the liquid top surface was 15 cm above in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

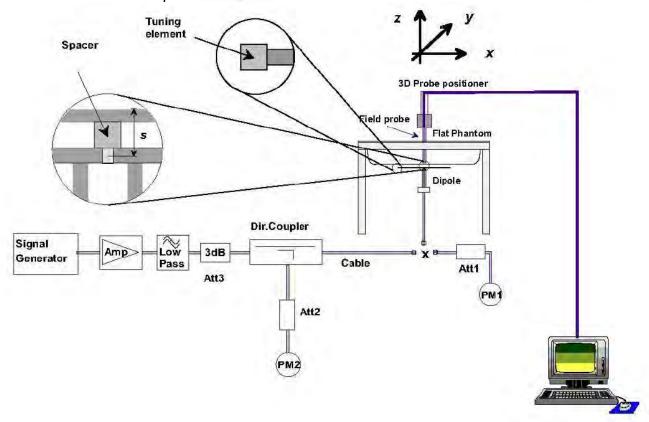

The block diagram of system check

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not experate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 16 of 255

System check results 3.6

Validation Kit	S/N	Frequency (MHz)	1W Target 1g-SAR (W/kg)	pin=250mW Measured 1g-SAR (W/kg)	Normalized to 1W 1g-SAR (W/kg)	Deviation (%)	Limit	Measurement Date
D750V3	1015	750	8.51	1.94	7.76	-8.81	± 10%	Aug.10,2022
D835V2	4d063	835	9.64	2.32	9.28	-3.73	± 10%	Aug.11,2022
D1750V2	1008	1750	36.6	9.14	36.56	-0.11	± 10%	Aug.12,2022
D1900V2	5d173	1900	39.6	9.98	39.92	0.81	± 10%	Aug.13,2022
D2450V2	727	2450	52.8	13.3	53.2	0.76	± 10%	Aug.14,2022
D2600V2	1005	2600	56.8	13.9	55.6	-2.11	± 10%	Aug.15,2022
D2600V2	1005	2600	56.8	13.9	55.6	-2.11	± 10%	Aug.16,2022

Validation Kit	S/N	Frequency (MHz)	1W Target 1g-SAR (W/kg)	pin=100mW Measured 1g-SAR (W/kg)	Normalized to 1W 1g-SAR (W/kg)	Deviation (%)	Limit	Measurement Date
D5GHzV2	1023	5250	81	8.74	87.4	7.90	± 10%	Aug.17,2022
D5GHzV2	1023	5600	84.4	8.44	84.4	0.00	± 10%	Aug.18,2022
D5GHzV2	1023	5750	81	8.09	80.9	-0.12	± 10%	Aug.19,2022

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at the times-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of locuments in the limits of liability, indemnification and purisdiction issues to the company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 17 of 255

TEST CONFIGURATIONS

4.1 **Test Environment**

Ambient Temperature: 22±2° C Tissue Simulating Liquid: 22±2° C

4.2 **Test Note**

'General: Measurements are performed respectively on the lowest, middle and highest channels of the operating band(s).

'General: The EUT is set to maximum power level during all tests, and at the beginning of each test the battery is fully charged.

'General: During the SAR testing, the DASY system checks power drift by comparing the e-field strength of one specific location measured at the beginning with that measured at the end of the SAR testing.

General: According to KDB447498D01v06, testing of other required channels is not required when the reported 1-g SAR for the highest output channel is ≤ 0.8 W/kg, when the transmission band is ≤ 100 MHz.

General: According to KDB865664D01v01r04, SAR measurement variability must be assessed for each frequency band. When the original highest measured SAR is ≥ 0.8 W/kg, repeated that measurement once. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).

'GSM: SAR test reduction for GPRS/EDGE mode is determined by the sourcebased time-averaged output power. The data mode with highest specified timeaveraged output power should be tested for SAR compliance.

'UMTS (HSDPA): The 3G SAR test reduction procedure is applied to HSDPA with 12.2 kbps RMC as the primary mode. Since the maximum output power in a secondary mode (HSDPA) is ≤ ¼ dB higher than the primary mode (WCDMA), SAR measurement is not required for the secondary mode (HSDPA). The following 4 subtests were completed according to Release 5 procedures in section 5.2 of 3GPP TS 34.121. A summary of these setting are illustrated below:

Sub-test	βε	βa	βa (SF)	$\beta c/\beta a$	$\beta_{hs}^{(I)}$	CM (dB)(2)
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15(3)	15/15(3)	64	12/15(3)	24/15	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{ls} = \beta_{ls}/\beta_c = 30/15 \Leftrightarrow \beta_{ls} = 30/15 *\beta_c$

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$.

Note 3: For subtest 2 the β₀/β₄ ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

UMTS (HSPA): The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) with 12.2 kbps RMC as the primary mode. Since the maximum output power in a secondary mode (HSPA) is ≤ ¼ dB higher than the primary mode (WCDMA), SAR measurement is not required for the secondary mode (HSPA). The following 5 sub-tests were completed according to Release 6

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

解析子方式就明・加報音音光性無利側成之体的理具(門時以体的理解性別人・各報音光を存立可管固定)・不可能切接線。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

> t (886-2) 2299-3279 f (886-2) 2298-0488 www.sas.com.tw



Page: 18 of 255

procedures in section 5.2 of 3GPP TS 34.121. A summary of these setting are illustrated below:

Sub- test	βε	β_{d}	β _d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	$\beta_{\rm ed}$	β _{ed} (SF)	β _{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E- TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15		2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 *\beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hc}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS- DPCCH, E-DPDCH and E-DPDCH an DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to β_c = 10/15 and β_d = 15/15.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g. Note 6: βed cannot be set directly; it is set by Absolute Grant Value.

UMTS (HSPA+): The 3G SAR test reduction procedure is applied to HSPA+ with 12.2 kbps RMC as the primary mode. Since the maximum output power in a secondary mode (HSPA+) is ≤ ¼ dB higher than the primary mode (WCDMA), SAR measurement is not required for the secondary mode (HSPA+). The following 1 subtest was completed according to Release 7 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

Table C.11.1.4: β values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM-

1	Sub-	β _c ₊	βd⊎	β _{HS} ₊	β _{ec} ₊	β _{ed} ₊	β _{ed} ₊	CM⊹	MPR√	AG⊹	E-TFCI	E-TFCI
	test₽	(Note3)↔		(Note1)₽	42	(2xSF2) ↔	(2xSF4)√	(dB)√	(dB)⊬	Index⊍	(Note 5)4	(boost)₽
						(Note 4)₽	(Note 4)₽	(Note 2)₽	(Note 2)+	(Note 4)		
ŀ	1.₽	1₽	0₽	30/15₽	30/15₽	βed1: 30/15√	βed3: 24/15√	3.5₽	2.5₽	14₽	105₽	105₽
						βed2: 30/15√	β _{ed} 4: 24/15₽					

 Δ ACK, Δ NACK and Δ CQI = 30/15 with β_{hs} = 30/15 * β_c .4

CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).4 Note 2:

Note 3: DPDCH is not configured, therefore the β_0 is set to 1 and β_d = 0 by default.

Note 4: βed can not be set directly; it is set by Absolute Grant Value. ₽

All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-Note 5: DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.

'UMTS (DC-HSDPA): The 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable. Since the maximum output power in a secondary mode (DC-HSDPA) is $\leq \frac{1}{4}$ dB higher than the primary mode (WCDMA), SAR measurement is not required for the secondary mode (DC-HSDPA). The following tests were completed according to procedures in section 7.3.13 of 3GPP TS 34.108 v9.5.0. A summary of these setting are illustrated below:

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

解析子方式就明・加報音音光性無利側成之体的理具(門時以体的理解性別人・各報音光を存立可管固定)・不可能切接線。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 19 of 255

Table C.8.1.12: Fixed Reference Channel H-Set 12

-	Parameter <i>₀</i>	Unit₽	Value₽				
	Avg. Inf. Bit Rate₽	kbps₽	60₽				
	Distance₽	TTI's₽	1₽				
Number	of HARQ Processes₽	Proces	6₽				
		ses₽	6				
Informati	on Bit Payload ($N_{ extit{ iny{INF}}}$) \wp	Bits₽	120₽				
Number	Code Blocks₽	Blocks₽	1₽				
■ Binary C	hannel Bits Per TTI₽	Bits₽	960₽				
■ Total Ava	ailable SML's in UE₽	SML's₽	19200₽				
Number	of SML's per HARQ Proc.₽	SML's₽	3200₽				
Coding F	Rate₽	ė,	0.15₽				
Number	of Physical Channel Codes₽	Codes₽	1₽				
 Modulation 		₽	QPSK₽				
■ Note 1:	The RMC is intended to be used f	or DC-HSD	PA				
mode and both cells shall transmit with identical							
parameters as listed in the table.√							
Note 2:	Maximum number of transmission retransmission is not allowed. The						

Inf. Bit Payload [120]				
CRC Addition [120	24 CRC				
Code Block Segmentation [144					
Turbo-Encoding (R=1/3)			432		12	Tail Bits
1st Rate Matching			432			
RV Selection [960]		
Physical Channel Segmentation	960					

constellation version 0 shall be used.

Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

The following 4 sub-tests for HSDPA were completed according to Release 8 procedures in section 5.2 of 3GPP TS34.121. A summary of subtest settings are illustrated below:

Sub-test	βε	βa	βa (SF)	$\beta c/\beta a$	$\beta_{hs}^{(I)}$	CM (dB)(2)
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15(3)	15/15(3)	64	12/15(3)	24/15	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 *\beta_c$

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$.

Note 3: For subtest 2 the βc/βa ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to β_e = 11/15 and β_d = 15/15.

"LTE: LTE modes test according to KDB 941225D05v02r05.

a. Per Section 5.2.1, the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 20 of 255

- Using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
- When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel.
- When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel. b. Per Section 5.2.2, the largest channel bandwidth and measure SAR for QPSK with 50% RB allocation
- The procedures required for 1 RB allocation in 5.2.1 are applied to measure the SAR for QPSK with 50% RB allocation.
- c. Per Section 5.2.3, the largest channel bandwidth and measure SAR for QPSK with 100% RB allocation
- For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 5.2.1 and 5.2.2 are ≤ 0.8 W/kg.
- Otherwise, SAR is measured for the highest output power channel and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
- d. Per Section 5.2.4, Higher order modulations
- For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in sections 5.2.1, 5.2.2 and 5.2.3 to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is > 1/2 dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/ka.
- e. Per Section 5.3, other channel bandwidth standalone SAR test requirements
- For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section 5.2 to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is > ½ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279 f (886-2) 2298-0488 www.sas.com.tw



Page: 21 of 255

reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg. The equivalent channel configuration for the RB allocation, RB offset and modulation etc. is determined for the smaller channel bandwidth according to the same number of RB allocated in the largest channel bandwidth.

TDD LTE was tested at highest duty factor using UL-DL configuration 0 with 6 UL subframes and 2 special subframes using extended cyclic prefix only and special subframe configuration 6. SAR tests were performed at maximum output power and worst-case transmission duty factor in extended cyclic prefix. Per 3GPP 36.211 Section 4.2, the duty factor for UL-DL configuration 0/special subframe configuration 6 using extended cyclic prefix is 0.633.

According to KDB 941225 D05, SAR testing for TDD LTE must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP TDD LTE configurations. The TDD-LTE of this device supports frame structure type 2 defined in 3GPP TS 36.211 section 4.2, and the frame structure configuration can be tabulated as below.

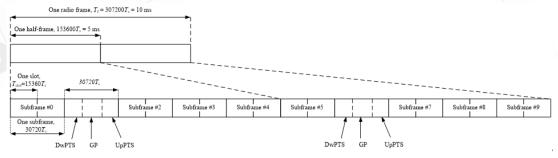


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 22 of 255

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS)

	Special	No	ormal cyclic prefix in	downlink∂	Ext	tended cyclic prefix ir	n downlink∂
•	subframe	DwPTS.	Upl	ets.	DwPTS.	Upl	ZIS∂
	onfiguratio n∂	ą.	Normal cyclic prefix↓ in uplink∂	Extended cyclic prefix ↓ in uplink⊮	ą.	Normal cyclic prefix in uplink⊮	Extended cyclic prefix in uplink
-	0€	6592 · <i>T</i> _s ₽			7680 ⋅ T _s ₽		
-	1₽	19760· <i>T</i> s ⁴³			20480 · T _s		
-	2₽	21952·T _s	$(1+X)\cdot 2192\cdot T_s$	$(1+X)\cdot 2560\cdot T_{s}$	23040·T _s	$(1+X)\cdot 2192\cdot T_{s}$	$(1+X)\cdot 2560\cdot T_{\rm s}$
	3₽	24144·T _s	, , ,	. , ,	25600 · T _s		
•	4₽	26336·T _s			7680 · T _s +		
•	5₽	6592 · T _s ₽			20480 · T _s	$(2+X)\cdot 2192\cdot T_s$	$(2+X)\cdot 2560\cdot T_s$
•	6₽	19760∙ <i>T</i> _s ₽	()	()	23040 · T _s	φ	e e
•	7₽	21952·T _s	$(2+X)\cdot 2192\cdot T_s$	$(2+X)\cdot 2560\cdot T_{\rm s}$	12800 · T _s &		
•	8₽	24144·T _s			- -2	- 43	- 4
	9₽	13168 · T _s &			-0	- ₽	- ₽

Table 4.2-2: Uplink-downlink configurations

•	Uplink-downlink ⊌	Downlink-to-Uplink →	Subframe number-									
	configuration <i>₀</i>	Switch-point periodicity∂	0₽	1₽	2₽	3₽	4₽	5₊	6₽	7₽	8₽	9₽
•	042	5 <u>ms</u> -	D₽	S₽	U₽	U₽	Ç	D₽	S₽	Û	U₽	Π÷
•	1₽	5 <u>ms</u> ₽	D₽	S₽	U₽	U₽	D₽	D₽	S₽	U₽	U₽	D₽
•	2₽	5 <u>ms</u> ₽	D₽	S₽	U₽	D₽	D₽	D₽	S₽	U₽	D₽	D₽
•	3₽	10 <u>ms</u> ⊬	D₽	S₽	U₽	U₽	Ç	٥	D₽	٦	D₽	D↔
•	4₽	10 <u>ms</u> .	D₽	S₽	U₽	U₽	Ĉ	٥	D₽	ů	D₽	D₽
-	5₽	10 <u>ms</u> .	D₽	S₽	U₽	D₽						
•	6₽	5 <u>ms</u> ₽	D₀	S₽	U₽	U₽	U₽	D₽	S₽	U₽	U₽	D₽

Considering the highest transmission duty cycle. TDD LTE was tested using Uplink-Downlink configuration 0 with 6 uplink subframe and 2 special subframe. The special subframe was set to special subframe configuration 6 using extended cyclic prefix uplink. Therefore, SAR testing for TDD LTE was measured at the maximum output power with highest transmission duty cycle of 63.33%.

LTE downlink CA: The device supports the carrier aggregation in the downlink. All uplink communications are identical to the Release 8 specifications. Uplink maximum output power is measured with downlink carrier aggregation active, only for the channel with highest measured maximum output power when downlink carrier aggregation is inactive, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than 1/4 dB higher than the maximum output power measured when downlink carrier aggregation inactive. The downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements. The nominal channel spacing is determined by [BW1 + BW2 - 0.1*|BW1 - BW2|]/2 MHz, where BW1 and BW2 are the channel bandwidths of the CC in a 2-CC aggregation configuration. The downlink PCC channel should be paired with the uplink channel unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sas.com.tw



Page: 23 of 255

according to normal configurations, as if there is no carrier aggregation. The downlink SCC should be adjacent to the PCC and remain within the downlink transmission band for contiguous intra-band CA. For non-contiguous intra-band CA, the SCC should be selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band. For inter-band CA, the SCC should be near the middle of its transmission band. When downlink carrier aggregation is active uplink maximum output power remain within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive, so SAR evaluation is not required for downlink carrier aggregation.

WLAN 2.4GHz: 802.11b DSSS SAR Test Requirements: SAR is measured for 2.4 GHz 802.11b DSSS mode using the highest measured maximum output power channel, when the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration. When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

WLAN 2.4GHz: 802.11g/n OFDM SAR Test Exclusion Requirements: SAR is not required for 802.11g/n since the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤

'WLAN 5GHz: Initial Test Configuration: An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. When the reported SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until the reported SAR is ≤ 1.2 W/kg or all required channels are tested. Since the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for subsequent test configuration.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This documents is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 24 of 255

4.3 **Test position**

Tablet mode SAR test position (0mm)

For full-size tablet, according to KDB 616217 D04, SAR evaluation is required for back surface and edges of the devices. The back surface and edges of the tablet are tested with the tablet touching the phantom. Exposures from antennas through the front surface of the display section of a tablet are generally limited to the user's hands. Exposures to hands for typical consumer transmitters used in tablets are not expected to exceed the extremity SAR limit; therefore, SAR evaluation for the front surface of tablet display screens are generally not necessary. When voice mode is supported on a tablet and it is limited to speaker mode or headset operations only, additional SAR testing for this type of voice use is not required.



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 25 of 255

Test limit

§ 2.1093(d)(1)

Applications for equipment authorization of portable RF sources subject to routine environmental evaluation must contain a statement confirming compliance with the limits specified in § 1.1310 as part of their application. Technical information showing the basis for this statement must be submitted to the Commission upon request. The SAR limits specified in § 1.1310(a) through (c) of this chapter shall be used for evaluation of portable devices transmitting in the frequency range from 100 kHz to 6 GHz. Portable devices that transmit at frequencies above 6 GHz shall be evaluated in terms of the MPE limits specified in Table 1 to § 1.1310(e)(1). A minimum separation distance applicable to the operating configurations and exposure conditions of the device shall be used for the evaluation. In general, maximum time-averaged power levels must be used for evaluation. All unlicensed personal communications service (PCS) devices and unlicensed NII devices shall be subject to the limits for general population/uncontrolled exposure.

Radiofrequency radiation exposure limits.

§ 1.1310(a)

Specific absorption rate (SAR) shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in § 1.1307(b) within the frequency range of 100 kHz to 6 GHz (inclusive).

§ 1.1310(b)

The SAR limits for occupational/controlled exposure are 0.4 W/kg, as averaged over the whole body, and a peak spatial-average SAR of 8 W/kg, averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the parts of the human body treated as extremities. such as hands, wrists, feet, ankles, and pinnae, where the peak spatial-average SAR limit for occupational/controlled exposure is 20 W/kg, averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). Exposure may be averaged over a time period not to exceed 6 minutes to determine compliance with occupational/controlled SAR limits.

The SAR limits for general population/uncontrolled exposure are 0.08 W/kg, as averaged over the whole body, and a peak spatial-average SAR of 1.6 W/kg, averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the parts of the human body treated as extremities, such as hands, wrists, feet, ankles, and pinnae, where the peak spatialaverage SAR limit is 4 W/kg, averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). Exposure may be averaged over a time period not to exceed 30 minutes to determine compliance with general population/uncontrolled SAR limits.

Note to paragraphs (a) through (c):

SAR is a measure of the rate of energy absorption due to exposure to RF electromagnetic energy. These SAR limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized SAR in Section 4.2 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz," ANSI/IEEE Std C95.1-1992, copyright 1992 by the Institute of Electrical and

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279 f (886-2) 2298-0488 www.sas.com.tw



Page: 26 of 255

Electronics Engineers, Inc., New York, New York 10017. These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in "Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields," NCRP Report No. 86, Section 17.4.5, copyright 1986 by NCRP, Bethesda, Maryland 20814. Limits for whole body SAR and peak spatial-average SAR are based on recommendations made in both of these documents. The MPE limits in Table 1 are based generally on criteria published by the NCRP in "Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields," NCRP Report No. 86, Sections 17.4.1, 17.4.1.1, 17.4.2 and 17.4.3, copyright 1986 by NCRP, Bethesda, Maryland 20814. In the frequency range from 100 MHz to 1500 MHz, these MPE exposure limits for field strength and power density are also generally based on criteria recommended by the ANSI in Section 4.1 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz," ANSI/IEEE Std C95.1-1992, copyright 1992 by the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017.

Portable devices that transmit at frequencies above 6 GHz shall be evaluated in terms of the MPE limits specified in Table 1 to § 1.1310(e)(1).

According to ANSI/IEEE C95.1-1992, the criteria listed in the following Table shall be used to evaluate the environmental impact of human exposure to radio frequency (RF) radiation as specified in §1.1310.

Peak Spatially Averaged Power Density was evaluated over a circular area of 4cm2 per interim FCC Guidance for near-field power density evaluations per October 2018 TCB Workshop notes



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sas.com.tw



Page: 27 of 255

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)				
	(i) Limits for Occupational/Controlled Exposure							
0.3-3.0	614	1.63	*(100)	≤6				
3.0-30	1842/f	4.89/f	*(900/f ²)	<6				
30-300	61.4	0.163	1.0	<6				
300-1,500			f/300	<6				
1,500- 100,000			5	<6				
	(ii) Limits for General Population/Uncontrolled Exposure							
0.3-1.34	614	1.63	*(100)	<30				
1.34-30	824/f	2.19/f	*(180/f ²)	<30				
30-300	27.5	0.073	0.2	<30				
300-1,500			f/1500	<30				
1,500- 100,000			1.0	<30				

f = frequency in MHz. * = Plane-wave equivalent power density. Table 1 to § 1.1310(e)(1) - Limits for Maximum Permissible Exposure (MPE)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at the times-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of locuments in the limits of liability, indemnification and purisdiction issues to the company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. prosecuted to the fullest extent of the law.



Page: 28 of 255

4.5 Proximity sensor operation description

The P-sensor being used to reduce output power is capacitive in which when the object such as human body, metal or plastic is being approached, the sensing capacitance would be increased with the antenna pad. Once the capacitance is accumulated, and reached over the threshold as set in MCU of the microchip, the interruption signal is pulled low (High state without trigger) and further inform modem module of the transmitter to make power reduction.

4.5.1 Proximity sensor measurement procedure

- 1. The proximity sensor is collocated with WWAN/WLAN antenna.
- 2. Output power is measured, and monitored by using the base station simulator and power sensor/power meter. A RF cables with sufficient length was being attached from the antenna port of the module, and used for the measurement. The appropriate loss attenuated from cable is compensated in the test setup.



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd



Page: 29 of 255

4.5.2 Trigger distances for back/top side

Test procedure:

- 1. The entire back surface or edge of the tablet is positioned below a flat phantom filled with the required tissue equivalent medium and positioned at least 20 mm further than the distance that triggers power reduction.
- 2. The back surface or edge is moved toward the phantom in 3 mm steps until the sensor triggers.
- 3. The back surface or edge is again moved toward the phantom, but in 1 mm steps, until it is at least 5 mm past the triggering point or touching the phantom
- 4. If the tablet is not touching the phantom, it is moved in 3 mm steps until it touches the phantom to confirm that the sensor remains triggered and the maximum power stays reduced.
- 5. The back surface or edge is then moved back (further away) from the phantom until maximum output power is returned to the normal maximum level.
- 6. The process is then reversed by moving the tablet away from the phantom to determine triggering release, until it is at least 10 mm beyond the point that triggers the return of normal maximum power.
- 7. The measured output power within \pm 5 mm of the triggering points, or until the tablet is touching the phantom, for movements to and from the phantom should be tabulated.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 30 of 255

8. To ensure all production units are compliant, it is generally necessary to reduce the triggering distance determined from the triggering tests by 1 mm, or more if it is necessary, and use the smallest distance for movements to and from the phantom, minus 1 mm, as the sensor triggering distance for determining the SAR measurement distance.

9. For back/top, the trigger distance of proximity sensor is tabulated below.

Trigger distance (mm)	Back	Тор
Ant 1	17	18
Ant 2	13	14
Ant 4	15	16

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

JOJ Idiwali Eta.



Page: 31 of 255

4.5.3 Tilt angle testing

Test procedure:

- 1. The influence of table tilt angles to proximity sensor triggering is determined by positioning each tablet edge that contains a transmitting antenna, perpendicular to the flat phantom, at the smallest sensor triggering test distance determined in sections 1.6.2 by rotating the tablet around the edge next to the phantom in ≤ 10 deg increments until the tablet is +/- 45deg or more from the vertical position at 0 deg.
- 2. If sensor triggering is released and normal maximum output power is restored within the +/- 45deg range, the procedures in step 1) should be repeated by reducing the tablet to phantom separation distance by 1 mm until the proximity sensor no longer releases triggering, and maximum output power remains in the reduced mode.
- The smallest separation distance determined in steps 1) and 2), minus 1 mm, is the sensor triggering distance for tablet tilt coverage. The smallest separation distance determined in sections 1.6.2, 1.6.3 minus 1 mm should be used in the SAR measurements.
- 4. The influence of tablet tilt angles to proximity sensor triggering is determined by positioning top and right sides, please refer to table 1.6.5 and 1.6.6.
- 5. After the tilt angle testing for top edge, the sensor is not released during +/- 45deg, so trigger distance - 1mm should be used in the SAR measurements.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 32 of 255

4.5.4 Proximity sensor coverage

The following procedures do not apply and are not required when the antenna and sensor are collocated and the peak SAR location is overlapping with the sensor.

Test procedure:

- The back surface or edges of the tablet is positioned at a test separation distance less than or equal to the distance required for back surface or edge triggering, with both the antenna and sensor pad located at least 20 mm laterally outside the edge (boundary) of the phantom, along the direction of maximum antenna and sensor offset.
- The similar sequence of steps applied to determine sensor triggering distance in section 1.6.2 are used to verify back surface and edge sensor coverage by moving the tablet (sensor and antenna) horizontally toward the phantom while maintaining the same vertical separation between the back surface or edge and the phantom.
- After the exact location where triggering of power reduction is determined, with respect to the sensor and antenna, the tablet movement should be continued, in 3 mm increments, until both the sensor and antenna(s) are fully under the phantom and at least 20 mm inside the phantom edge.
- The process is then repeated from the other direction, at the opposite end of maximum antenna and sensor offset, by rotating the tablet 180 degrees.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Page: 33 of 255

4.5.5 Results

The measured output power within ± 5 mm of the triggering points, or until the tablet is touching the phantom, for movements to and from the phantom is tabulated in the following.

Back Surface

Moving device toward the phantom

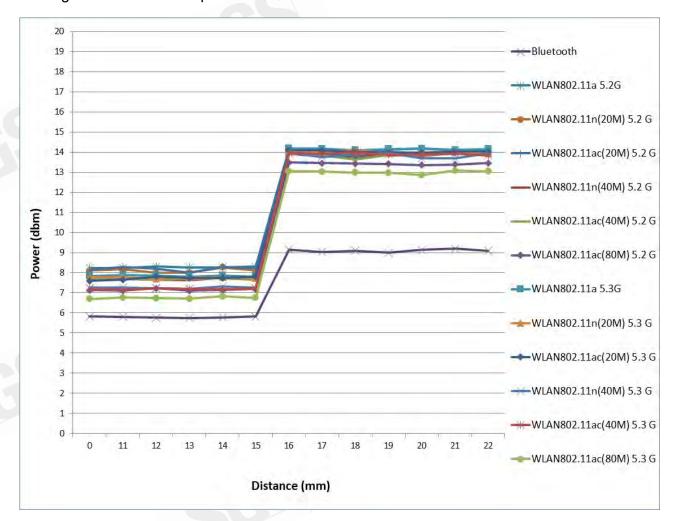


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 34 of 255

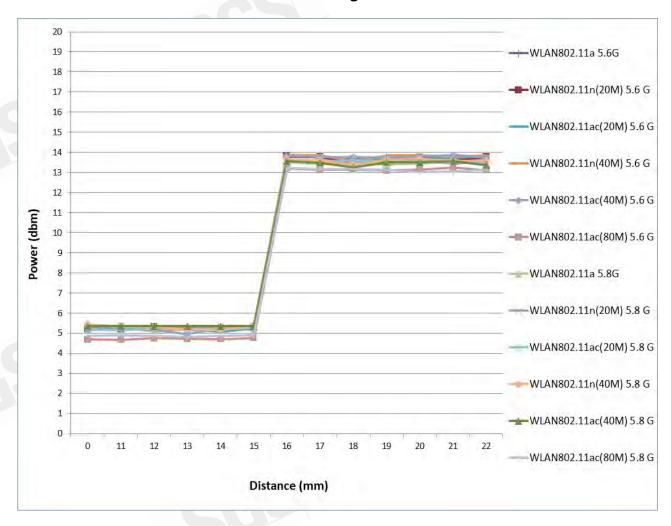

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號


台灣檢驗科技股份有限公司

t (886-2) 2299-3279 f (886-2) 2298-0488

www.sgs.com.tw



Page: 35 of 255

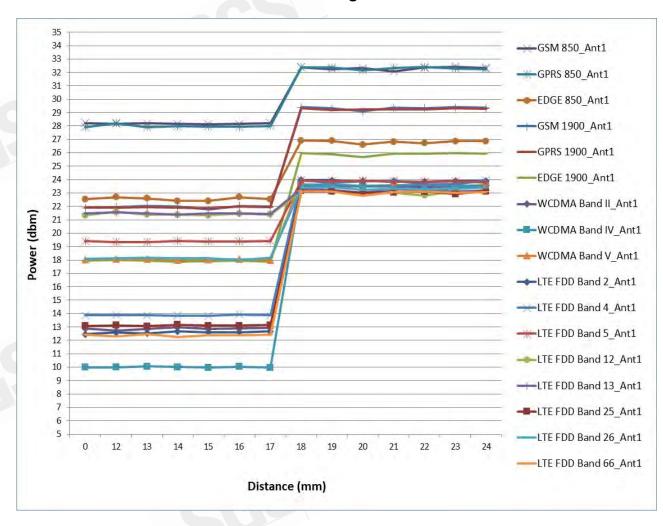

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Lt



Page: 36 of 255



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


解非另有說明: 東東古部米里到測点之樣面具頁 中時比較面僅來留知大。各種古光整本公司青田計刊,不可能分複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, fany. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SCST Support High ** Not 134 Will Willing Road Now Taippi Industrial Park** Willy District** Now Taippi City** Taippin City*** Taippin City** Taippin City***



Page: 37 of 255

Moving device away from the phantom

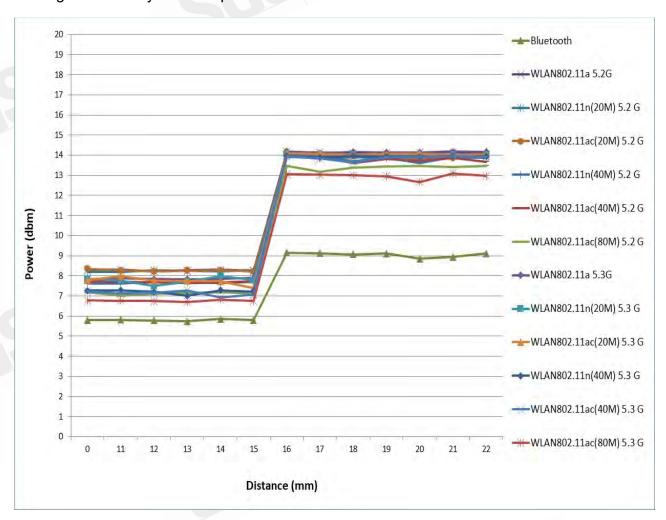


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd



Page: 38 of 255

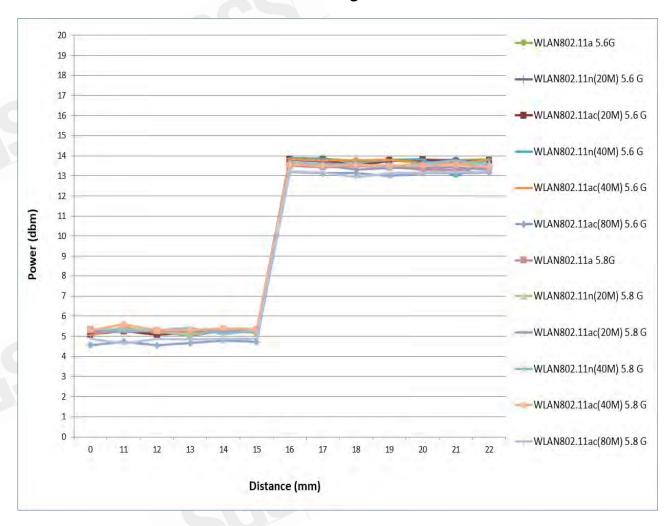


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

JOJ Idiwali Eta.



Page: 39 of 255

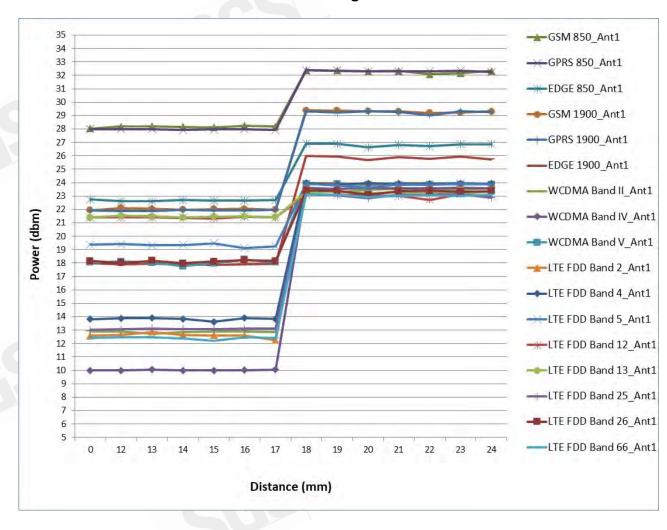


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd



Page: 40 of 255

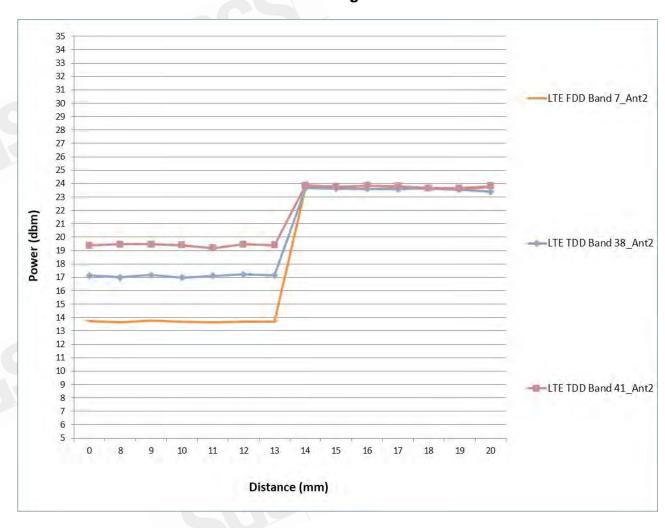

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

解非另有說明: 東東古部米里到測点之樣面具頁 中時比較面僅來留知大。各種古光整本公司青田計刊,不可能分複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, fany. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SCST Support High ** Not 134 Will Willing Road Now Taippi Industrial Park** Willy District** Now Taippi City** Taippin City*** Taippin City** Taippin City***


JOJ Idiwan Eta.



Page: 41 of 255

Top side

Moving device toward the phantom

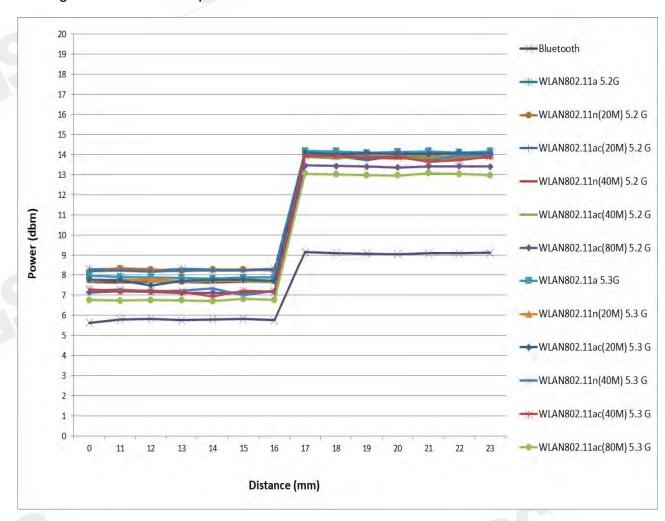


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488



Page: 42 of 255

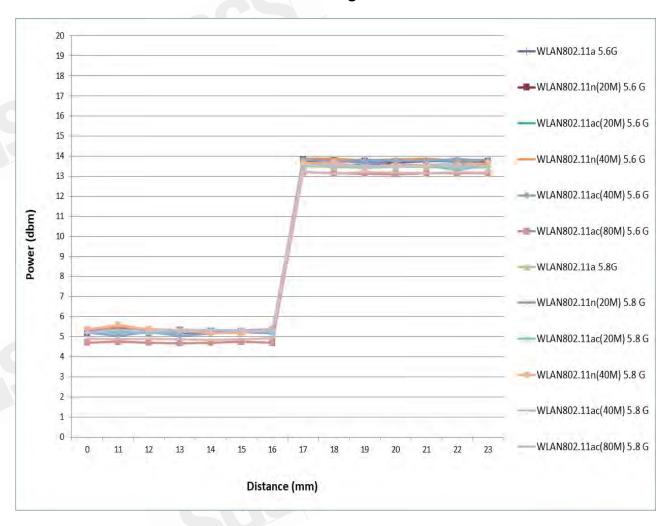


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd



Page: 43 of 255

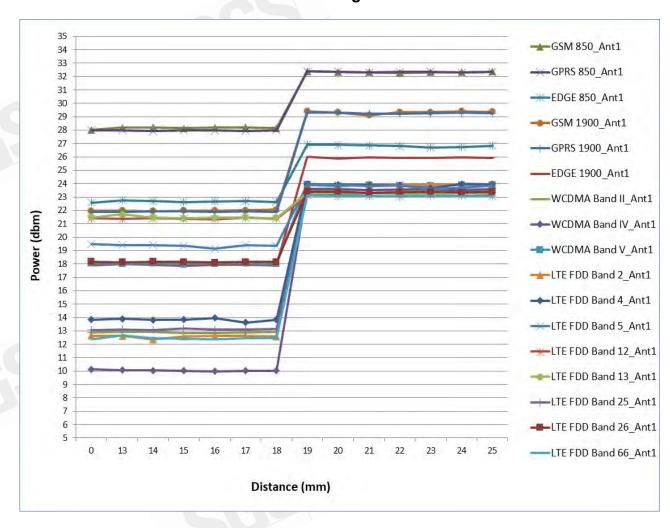


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Lt



Page: 44 of 255

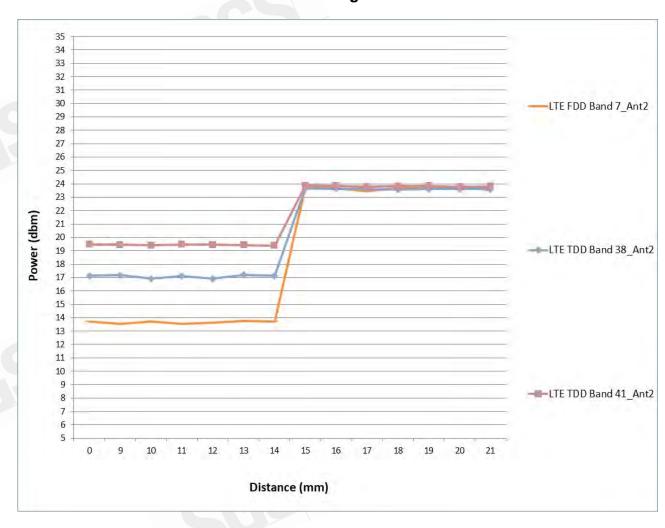

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

解非另有說明: 東東古部米里到測点之樣面具頁 中時比較面僅來留知大。各種古光整本公司青田計刊,不可能分複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, fany. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SCST Support High ** Not 134 Will Willing Road Now Taippi Industrial Park** Willy District** Now Taippi City** Taippin City*** Taippin City** Taippin City***

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司


t (886-2) 2299-3279

f (886-2) 2298-0488



Page: 45 of 255

Moving device away from the phantom

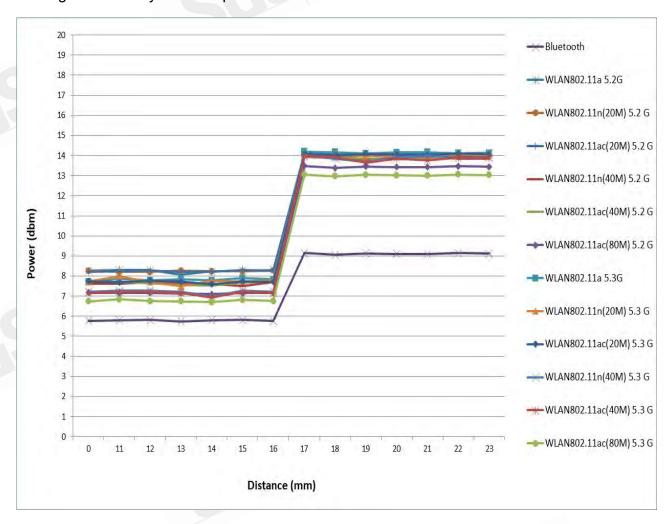


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 46 of 255

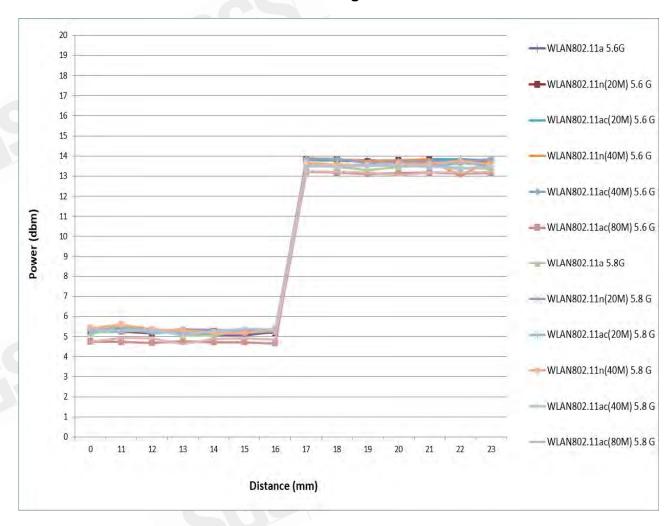


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 47 of 255

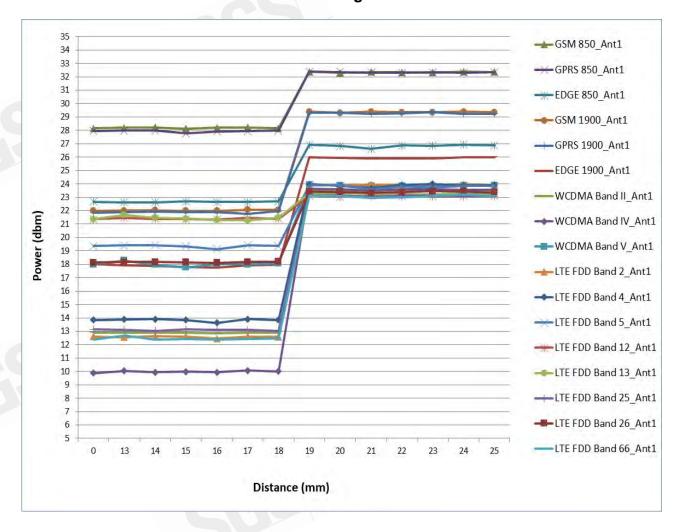


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 48 of 255

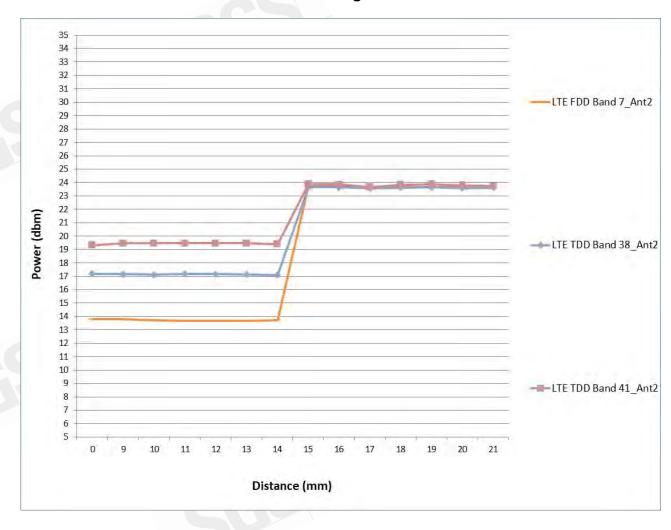

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

解非另有說明: 東東古部米里到測点之樣面具頁 中時比較面僅來留知大。各種古光整本公司青田計刊,不可能分複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, fany. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SCST Support High ** Not 134 Will Willing Road Now Taippi Industrial Park** Willy District** Now Taippi City** Taippin City*** Taippin City** Taippin City***



Page: 49 of 255

Table 4.5 Tilt angle test results

Antenna	P-sensor ON/OFF	-50 deg	-45 deg	-40 deg	-30 deg	-20 deg	-10 deg	0 deg	10 deg	20 deg	30 deg	40 deg	45 deg	50 deg
1	18mm	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON
2	14mm	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON	ON
4	16mm	ON	ON	ON	ON	ON	ON	ON	ON	NO	ON	ON	ON	ON

During the tilt angle testing, the sensor is not released, so trigger distance - 1 is used in the SAR measurement.

Note:

- 1. The triggering variations and hysteresis effect has been evaluated separately according to the tissue-equivalent medium required for each frequency band, and sensor triggering does not change with different tissue-equivalent media.
- 2. Conducted power is monitored qualitatively to identify the general triggering characteristics and recorded quantitatively, versus spacing.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 50 of 255

4.5.6 Operation description for P-sensor

Power Reduction Design Specification (for P-sensor)

With P-sensor mechanism, the maximum reduced power table in chapter 5 would be the default power when P-sensor failure or malfunction.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 51 of 255

MAXIMUM OUTPUT POWER

5.1 GSM/GPRS/EDGE

sensor off

nsor off								
EUT mode	Frequency (MHz)	СН		Max. Rated Avg. Power + Max.Tolerance - (dBm)		Bu	power Avg.	Source-based time average power Avg.
	201.0	10		,	•		(dBm)	(dBm)
GSM 850	824.2	12			32.5		32.34	23.31
(GMSK)	836.6	19			32.5		32.38	23.35
(05.1)	848.8	25			32.5		32.33	23.30
	The	division factor c	ompared	to the nu	umber of TX	time s	slot	
	Div	ision factor					1 TX tim	e slot
	DIV					-9.0	3	
		В	urst aver	age pow	er			
Max. Ma	32.5		31.5		30	29		
			1Dn	1UP	1Dn2U	Р	1Dn3UP	1Dn4UP
			Multi- d	class 8	Multi- clas	s 10	Multi- class 11	Multi- class 12
EUT mode	Frequency (MHz)	СН		/g. Bm)	Avg. (dBm))	Avg. (dBm)	Avg. (dBm)
GPRS 850	824.2	128	32.	.25	31.45		29.78	28.64
(GMSK)	836.6	190	32.	.38	31.48		29.93	28.91
(GIVISIC)	848.8	251	32.	.23	31.34		29.76	28.63
		Source-l	pased tim	ne avera	ge power			
GPRS 850	824.2	128	23.	.22	25.43		25.52	25.63
(GMSK)	836.6	190	23.	.35	25.46		25.67	25.90
(Olvion)	848.8	251	23.		25.32		25.50	25.62
	The d	ivision factor c	ompared	to the nu				
	Division factor		1 TX ti	me slot 03	2 TX time -6.02	slot	3 TX time slot -4.26	4 TX time slot

t (886-2) 2299-3279



Page: 52 of 255

Downt average waver										
			Ві	urst aver	age pow	er				
	. Rated Avg. Pov ax. Tolerance (dB			2	7	24		22.5		22
				1Dn	1UP	1Dn2U	P	1Dn3UP		1Dn4UP
				Multi-	class 8	Multi- clas	s 10	Multi- class 1	1	Multi- class 12
EUT mode	Frequency		СН	Α١	/g.	Avg.		Avg.		Avg.
LOTITIONE	(MHz)				Bm)	(dBm)		(dBm)		(dBm)
EDGE 850	824.2		128	26.90		23.85		22.46		21.79
(8PSK)	836.6		190	26.		23.75		22.40		21.63
(3. 2.1)	848.8		251	26.		23.81		22.37		21.73
		ı				ge power			-	
EDGE 850	824.2			17.		17.83		18.20		18.78
(8PSK)			190	17.	_	17.73		18.14		18.62
, ,	848.8	مان بنامان	251	17.		17.79	4:	18.11		18.72
	Ine	uivisi	on lactor co		to the hume slot	umber of TX		3 TX time sk	1	4 TV time elet
	Division factor			1 1X ti		2 TX time -6.02	SIOT	-4.26	JL	4 TX time slot -3.01
			-9.	03	-0.02		-4.20	80	ource-based time	
				. Rated	Вι	ırst average	30	average		
FLIT mode	EUT mode Frequency CH				Power +		power		power	
(MHz)			0			olerance		Avg.		Avg.
					(c	lBm)		(dBm)		(dBm)
	1850.2		512	2	2	29.5		29.31		20.28
GSM1900 (GMS	K) 1880		661		2	29.5		29.40		20.37
`	1909.8		810	810 29.5		29.5	29.27			20.24
		e divisi				ımber of TX	time s			-
				•				1 TX tir	ne	slot
		Division	factor	or					03	
			Bı	ırst aver	age pow	er		<u> </u>		
Max	. Rated Avg. Pov	/er +								
	ax. Tolerance (dB			29		29		27		26
				1Dn		1Dn2U		1Dn3UP		1Dn4UP
					class 8	Multi- clas	s 10	Multi- class 1	1	Multi- class 12
EUT mode	Frequency		СН	A۱	-	Avg.		Avg.		Avg.
	(MHz)				3m)	(dBm)		(dBm)		(dBm)
GPRS 1900	1850.2		512	29.		28.80		26.92		25.88
(GMSK)	1880		661	29.		28.93		26.95		25.93
	1909.8		810	29.		28.70		26.85		25.80
	Source-b 1850.2 512			20.		22.78		22.66		22.87
GPRS 1900	1880		661	20.		22.76		22.69		22.92
(GMSK)	1909.8		810	20.		22.68		22.59		22.79
						umber of TX	time			22.10
					me slot	2 TX time		3 TX time slo	ot I	4 TX time slot
	Division factor			-9.		-6.02		-4.26		-3.01
L										-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at the times-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of locuments in the limits of liability, indemnification and purisdiction issues to the company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 53 of 255

	P						
		В	urst average pow	er			
	. Rated Avg. Pow ax. Tolerance (dB		26	26	23.5	22	
			1Dn1UP	1Dn2UP	1Dn3UP	1Dn4UP	
			Multi- class 8	Multi- class 10	Multi- class 11	Multi- class 12	
EUT mode	Frequency	СН	Avg.	Avg.	Avg.	Avg.	
EUTHIOGE	(MHz)	СП	(dBm)	(dBm)	(dBm)	(dBm)	
EDGE 1900	1850.2	512	25.99	24.99	23.15	21.94	
(8PSK)	1880	661	25.93	24.79	23.14	21.82	
(or Six)	1909.8	810	25.79	24.81	23.11	21.80	
		Source-b	ased time averag	ge power			
EDGE 1900	1850.2	512	16.96	18.97	18.89	18.93	
(8PSK)	1880	661	16.90	18.77	18.88	18.81	
(or Sit)	(8PSK) 1909.8 810		16.76	18.79	18.85	18.79	
	The	division factor co	ompared to the nu	ımber of TX time	slot		
	Division factor		1 TX time slot	2 TX time slot	3 TX time slot	4 TX time slot	
	DIVISIONIACIO		-9.03	-6.02	-4.26	-3.01	

sensor on

ensor on						
EUT mode	Frequency (MHz)	СН	Max. Rated Avg. Power + Max.Tolerance	Burst average power	Source-based time average power	
	(IVII IZ)			Avg.	Avg.	
			(dBm)	(dBm)	(dBm)	
CCM 0F0	824.2	128	29	27.99	18.96	
GSM 850 (GMSK)	836.6	190	29	28.07	19.04	
(GWSK)	848.8	251	29	28.23	19.20	
	The divis	ion factor compared	to the number of TX	time slot		
	Division	n factor		1 TX ti	me slot	
	DIVISIO	i lactor		-9.03		



Page: 54 of 255

N.4	Data d Aven Dave		В	urst avera	age pow	er					
	Rated Avg. Pow x. Tolerance (dB			2		26		24		23	
				1Dn	1UP	1Dn2Ul	Р	1Dn3UP		1Dn4UP	
				Multi- d	class 8	Multi- class	s 10	Multi- class 11		Multi- class 12	
EUT mode	Frequency	CI	_	A۷	g.	Avg.		Avg.		Avg.	
LOTITIOGE	(MHz)			(dB		(dBm)		(dBm)		(dBm)	
GPRS 850	824.2	12	8	27.	78	24.88		22.75		21.75	
(GMSK)	836.6	19		28.	01	24.92		22.93		21.83	
(OMOIT)	848.8	25		27.94 24.89				22.81		21.81	
		S	ource-b	ased tim	ne averaç	ge power					
GPRS 850	824.2	12		18.	75	18.86		18.49		18.74	
(GMSK)	836.6	19		18.	98	18.90		18.67		18.82	
(GWGIT)	848.8	25		18.		18.87		18.55		18.80	
	The	division f	actor co			ımber of TX					
	Division factor			me slot		slot	3 TX time slo	ot	4 TX time slot		
	Bivisioniadioi		-9.0	03	-6.02		-4.26		-3.01		
			В	urst avera	age pow	er					
	Max. Rated Avg. Power + Max. Tolerance (dBm)				23		18			17	
					1UP	1Dn2UP		1Dn3UP		1Dn4UP	
				Multi- d	class 8	Multi- class	s 10	Multi- class 1	1	Multi- class 12	
CLIT mode	Frequency	CI	1	Avg.		Avg.		Avg.		Avg.	
EUT mode	(MHz)	Cl	٦	(dB	Sm)	(dBm)		(dBm)		(dBm)	
EDGE 850	824.2	12	128		37	19.77		17.76		16.68	
(8PSK)	836.6	19	0	22.	65	19.88		17.77		16.65	
(OF SIX)	848.8	25	251 22.7		71	19.82		17.49		16.60	
		S	ource-b	based time average power							
EDGE 850	824.2	12	8	13.	34	13.75		13.50		13.67	
(8PSK)	836.6	19	0	13.	62	13.86		13.51		13.64	
(or six)	848.8	25		13.		13.80		13.23		13.59	
	The	division f	actor co	ompared	to the nu	ımber of TX	time				
	Division factor			1 TX tii	me slot	2 TX time	slot	3 TX time slo	ot	4 TX time slot	
	DIVISIONIACIO			-9.0	03	-6.02		-4.26		-3.01	
					May	. Rated	Rı	ırst average	So	urce-based time	
	Frequency	,				Power +	ы	power		average	
EUT mode	(MHz)	'	CH	l		olerance		powei		power	
	(1011 12)					IBm)		Avg.		Avg.	
					,	,		(dBm)		(dBm)	
	1850.2		512	2	2	22.5		21.99		12.96	
GSM1900 (GMSI	<) 1880		66	1	2	22.5		22.05		13.02	
	1909.8		810)	2	22.5		22.07		13.04	
	The	division	factor c	ompared	to the nu	ımber of TX t	ime s	lot			
								1 TX tir	ne	slot	
	D	ivision fac	ctor						.03		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at the times-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of locuments in the limits of liability, indemnification and purisdiction issues to the company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. prosecuted to the fullest extent of the law.



Page: 55 of 255

Burst average power									
	Rated Avg. Pow x. Tolerance (dB	er +	22.5	19.5	17.5	16.5			
			1Dn1UP	1Dn2UP	1Dn3UP	1Dn4UP			
			Multi- class 8	Multi- class 10	Multi- class 11	Multi- class 12			
EUT mode	Frequency	СН	Avg.	Avg.	Avg.	Avg.			
EUT mode	(MHz)	Сп	(dBm)	(dBm)	(dBm)	(dBm)			
CDDS 1000	SPRS 1900 1850.2 512		21.87	19.43	17.38	16.22			
(GMSK)	1880	661	21.98	19.38	17.36	16.17			
(GIVISIN)	1909.8	810	21.89	19.39	17.33	16.20			
		Source-	based time avera	ge power					
GPRS 1900 1850.2 512			12.84	13.41	13.12	13.21			
			12.95	13.36	13.10	13.16			
(GIVISIN)	(GMSK) 1909.8 810		12.86	13.37	13.07	13.19			
	The	division factor c	compared to the number of TX time slot						
	Division factor		1 TX time slot	2 TX time slot	3 TX time slot	4 TX time slot			
	DIVISION IACIOI		-9.03	-6.02	-4.26	-3.01			
		В	urst average pow	er					
	Rated Avg. Pow x. Tolerance (dB)		18	15	13	12			
			1Dn1UP	1Dn2UP	1Dn3UP	1Dn4UP			
			Multi- class 8	Multi- class 10	Multi- class 11	Multi- class 12			
EUT mode	Frequency	СН	Avg.	Avg.	Avg.	Avg.			
EUTITIOGE	(MHz)	СП	(dBm)	(dBm)	(dBm)	(dBm)			
EDGE 1900	1850.2	512	17.87	14.56	12.60	11.61			
(8PSK)	1880	661	17.56	14.64	12.66	11.67			
(OFSK)	1909.8	810	17.97	14.72	12.71	11.50			
		Source-l	based time avera	ge power					
EDGE 1900	1850.2	512	8.84	8.54	8.34	8.60			
	1880	661	8.53	8.62	8.40	8.66			
(OF SIX)	(8PSK) 1909.8 810			8.70	8.45	8.49			
	The	division factor c	ompared to the nu	umber of TX time	slot				
	Division factor		1 TX time slot	2 TX time slot	3 TX time slot	4 TX time slot			
	DIVISION IACIO		-9.03	-6.02	-4.26	-3.01			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SCST Stawan Ltd. No 134 Wit King Road New Taipoi Industrial Park Withu District New Taipoi City, Taipon City, Taipon



Page: 56 of 255

5.2 WCDMA

sensor off

SCHSOI OH						
		WCDMA II				
	TX Channel					
F	requency (MHz)	1852.4	1880	1907.6		
Max. Rated Avg.	Power+Max. Tolerance (dBm)		24.00			
3GPP Rel 99	RMC 12.2Kbps	23.53	23.57	23.41		
	HSDPA Subtest-1	23.38	23.32	23.39		
2000 Dale	HSDPA Subtest-2	23.40	23.39	23.37		
3GPP Rel 5	HSDPA Subtest-3	22.83	22.92	22.92		
	HSDPA Subtest-4	22.79	22.92	22.84		
	HSUPA Subtest-1	23.33	23.42	23.36		
	HSUPA Subtest-2	21.29	21.45	21.43		
3GPP Rel 6	HSUPA Subtest-3	22.31	22.46	22.30		
	HSUPA Subtest-4	21.44	21.36	21.37		
	HSUPA Subtest-5	23.29	23.36	23.37		
3GPP Rel 7	HSPA+	20.90	20.88	20.88		
	DC-HSDPA Subtest-1	23.30	23.40	23.35		
20DD D -1 0	DC-HSDPA Subtest-2	23.38	23.31	23.39		
3GPP Rel 8	DC-HSDPA Subtest-3	22.91	22.88	22.90		
	DC-HSDPA Subtest-4	22.96	22.81	22.89		



Page: 57 of 255

	Band		WCDMA IN	/
	TX Channel	1312	1413	1513
	Frequency (MHz)	1712.4	1732.6	1752.6
Max. Rated Avg	. Power+Max. Tolerance (dBm)		24.00	
3GPP Rel 99	RMC 12.2Kbps	23.61	23.56	23.62
	HSDPA Subtest-1	23.36	23.42	23.44
3GPP Rel 5	HSDPA Subtest-2	23.35	23.43	23.38
SGPP Rei S	HSDPA Subtest-3	22.79	22.85	22.84
	HSDPA Subtest-4	22.91	22.81	22.87
	HSUPA Subtest-1	23.46	23.33	23.34
	HSUPA Subtest-2	21.46	21.31	21.45
3GPP Rel 6	HSUPA Subtest-3	22.38	22.37	22.41
	HSUPA Subtest-4	21.47	21.34	21.43
	HSUPA Subtest-5	23.44	23.38	23.42
3GPP Rel 7	HSPA+	20.82	20.84	20.93
	DC-HSDPA Subtest-1	23.34	23.43	23.32
3GPP Rel 8	DC-HSDPA Subtest-2	23.32	23.45	23.34
SGPP Rei o	DC-HSDPA Subtest-3	22.79	22.81	22.96
	DC-HSDPA Subtest-4	22.82	22.96	22.88
	Band		WCDMA\	/
	TX Channel	4132	4183	4233
	requency (MHz)	826.4	836.6	846.6
Max. Rated Avg	. Power+Мах. Tolerance (dВm)		24.00	
3GPP Rel 99	RMC 12.2Kbps	23.84	23.91	23.79
	HSDPA Subtest-1	23.42	23.47	23.30
3GPP Rel 5	HSDPA Subtest-2	23.49	23.32	23.32
SGPP Rei S	HSDPA Subtest-3	22.82	22.86	22.98
	HSDPA Subtest-4	22.82	22.81	22.85
	HSUPA Subtest-1	23.40	23.45	23.42
	HSUPA Subtest-2	21.34	21.40	21.35
3GPP Rel 6	HSUPA Subtest-3	22.46	22.34	22.49
	HSUPA Subtest-4	21.35	21.46	21.32
	HSUPA Subtest-5	23.39	23.46	23.44
3GPP Rel 7	HSPA+	20.84	20.83	20.96
	DC-HSDPA Subtest-1	23.49	23.44	23.34
3GPP Rel 8	DC-HSDPA Subtest-2	23.49	23.49	23.47
JOFF REIO	DC-HSDPA Subtest-3	22.93	22.95	22.84
	DC-HSDPA Subtest-4	22.98	22.90	22.96

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at the times-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. prosecuted to the fullest extent of the law.



Page: 58 of 255

sensor on

	Band		WCDMA II	
	TX Channel	9262	9400	9538
	Frequency (MHz)	1852.4	1880	1907.6
Max. Rated Avo	g. Power+Max. Tolerance (dBm)		13.00	
3GPP Rel 99	RMC 12.2Kbps	12.94	12.84	12.85
	HSDPA Subtest-1	11.85	11.84	11.96
2000 Dal 5	HSDPA Subtest-2	11.95	11.87	11.96
3GPP Rel 5	HSDPA Subtest-3	11.46	11.43	11.57
	HSDPA Subtest-4	11.43	11.42	11.53
	HSUPA Subtest-1	11.99	11.88	11.92
	HSUPA Subtest-2	11.96	11.91	11.95
3GPP Rel 6	HSUPA Subtest-3	10.93	10.91	10.94
	HSUPA Subtest-4	11.92	11.85	11.92
	HSUPA Subtest-5	11.00	10.89	10.90
3GPP Rel 7	HSPA+	11.90	11.78	11.82
	DC-HSDPA Subtest-1	11.78	11.82	11.89
0000 0 10	DC-HSDPA Subtest-2	11.87	11.83	11.90
3GPP Rel 8	DC-HSDPA Subtest-3	11.32	11.82 7 11.83 2 11.28 3 11.32 WCDMA IV	11.48
	DC-HSDPA Subtest-4	11.38	11.32	11.48
	Band		WCDMA I\	/
	TX Channel	1312	1413	1513
	Frequency (MHz)	1712.4	1732.6	1752.6
Max. Rated Avo	g. Power+Max. Tolerance (dBm)		10.50	
3GPP Rel 99	RMC 12.2Kbps	10.03	10.07	10.08
	HSDPA Subtest-1	9.06	9.04	9.13
3GPP Rel 5	HSDPA Subtest-2	8.99	8.96	9.00
301 1 Nei 3	HSDPA Subtest-3	8.67	8.63	8.69
	HSDPA Subtest-4	8.60	8.57	8.61
	HSUPA Subtest-1	8.50	8.49	8.63
	HSUPA Subtest-2	9.11	9.00	9.08
3GPP Rel 6	HSUPA Subtest-3	8.23	8.17	8.31
	HSUPA Subtest-4	9.08	9.06	9.17
	HSUPA Subtest-5	8.24	8.17	8.19
3GPP Rel 7	HSPA+	9.08	8.85	9.06
	DC-HSDPA Subtest-1	8.99	8.90	9.11
3GPP Rel 8	DC-HSDPA Subtest-2	8.89	8.96	8.88
3GPP Rel 8	DC-HSDPA Subtest-2 DC-HSDPA Subtest-3 DC-HSDPA Subtest-4	8.89 8.63	8.96 8.59 8.56	8.68 8.46


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at the times-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of locuments in the limits of liability, indemnification and purisdiction issues to the company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. prosecuted to the fullest extent of the law.



Page: 59 of 255

		WCDMA\		
	4132	4183	4233	
Fi	826.4	836.6	846.6	
Max. Rated Avg.	Power+Max. Tolerance (dBm)		18.50	
3GPP Rel 99	RMC 12.2Kbps	18.01	18.02	18.07
	HSDPA Subtest-1	17.14	17.16	17.08
3GPP Rel 5	HSDPA Subtest-2	17.20	17.18	17.09
SGPP Rei S	HSDPA Subtest-3	16.71	16.69	16.58
	HSDPA Subtest-4	16.59	16.66	16.55
	HSUPA Subtest-1	16.56	16.48	16.43
	HSUPA Subtest-2	17.08	16.99	17.02
3GPP Rel 6	HSUPA Subtest-3	16.12	16.00	16.07
	HSUPA Subtest-4	17.06	16.97	17.05
	HSUPA Subtest-5	16.09	16.03	15.99
3GPP Rel 7	HSPA+	16.97	16.97	16.92
	DC-HSDPA Subtest-1	17.05	17.06	17.02
2CDD Dal 0	DC-HSDPA Subtest-2	17.17	17.05	17.06
3GPP Rel 8	DC-HSDPA Subtest-3	16.66	16.54	16.46
	DC-HSDPA Subtest-4	16.44	16.60	16.50





Page: 60 of 255

5.3 FDD LTE

sensor off

			LTE	Band 2									
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	(dBm)	Target	MDD					
	Frequenc	y (MHz)		1860	1880	1900	Power + Max. Tolerance	MPR Allowed per 3GPP(dB)					
	Char	nnel		18700	18900	19100	(dBm)	JOI I (GD)					
		1	0	23.98	23.96	23.97	24.00	0					
	QPSK	O.DOV	1	50	23.77	23.89	23.92	24.00	0				
			1	99	23.82	23.94	23.90	24.00	0				
20		50	0	22.81	22.81	22.94	23.00	1					
		50	25	22.81	22.93	22.85	23.00	1					
			50	50	22.84	22.79	22.79	23.00	1				
		100	0	22.91	22.92	22.76	23.00	1					
	16-QAM	1	0	22.97	22.95	22.94	23.00	1					
							1	50	22.78	22.84	22.83	23.00	1
		1	99	22.86	22.77	22.81	23.00	1					
20		50	0	21.90	21.91	21.84	22.00	2					
		50	25	21.91	21.81	21.85	22.00	2					
		50	50	21.84	21.82	21.82	22.00	2					
		100	0	21.91	21.91	21.74	22.00	2					
		1	0	21.96	21.92	21.87	22.00	2					
		1	50	21.80	21.89	21.92	22.00	2					
		1	99	21.87	21.89	21.89	22.00	2					
20	64-QAM	50	0	20.83	20.77	20.89	21.00	3					
		50	25	20.82	20.88	20.90	21.00	3					
		50	50	20.82	20.86	20.77	21.00	3					
		100	0	20.77	20.88	20.77	21.00	3					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SCST Stawan Ltd. No 134 Wit King Road New Taipoi Industrial Park Withu District New Taipoi City, Taipon City, Taipon



Page: 61 of 255

			LTE	Band 2				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	(dBm)	Target Power +	MPR
	Frequenc	y (MHz)		1857.5	1880	1902.5	Max. Tolerance	Allowed per 3GPP(dB)
	Channel				18900	19125	(dBm)	OOI I (db)
		1	0	23.85	23.93	23.95	24.00	0
	1	36	23.79	23.94	23.75	24.00	0	
		1	74	23.76	23.83	23.93	24.00	0
15	15 QPSK	36	0	22.77	22.82	22.82	23.00	1
		36	18	22.87	22.78	22.91	23.00	1
		36	37	22.82	22.91	22.92	23.00	1
		75	0	22.89	22.77	22.94	23.00	1
		1	0	22.76	22.81	22.80	23.00	1
		1	36	22.95	22.89	22.82	23.00	1
		1	74	22.91	22.76	22.89	23.00	1
15	16-QAM	36	0	21.78	21.94	21.83	22.00	2
		36	18	21.94	21.91	21.79	22.00	2
		36	37	21.76	21.84	21.88	22.00	2
		75	0	21.78	21.81	21.90	22.00	2
		1	0	21.81	21.78	21.84	22.00	2
		1	36	21.76	21.83	21.78	22.00	2
		1	74	21.92	21.89	21.92	22.00	2
15	64-QAM	36	0	20.94	20.87	20.80	21.00	3
		36	18	20.76	20.89	20.81	21.00	3
		36	37	20.78	20.89	20.77	21.00	3
		75	0	20.92	20.93	20.81	21.00	3

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 www.sgs.com.tw

台灣檢驗科技股份有限公司

t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 62 of 255

			LTE	Band 2				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	(dBm)	Target Power +	MDD
	Frequenc	y (MHz)		1855	1880	1905	Max. Tolerance	MPR Allowed per 3GPP(dB)
	Channel				18900	19150	(dBm)	JGFF(UD)
		1	0	23.94	23.87	23.82	24.00	0
		1	25	23.86	23.94	23.93	24.00	0
		1	49	23.85	23.84	23.85	24.00	0
10	QPSK	25	0	22.82	22.77	22.91	23.00	1
		25	12	22.79	22.83	22.79	23.00	1
		25	25	22.93	22.87	22.82	23.00	1
		50	0	22.86	22.88	22.75	23.00	1
		1	0	22.78	22.86	22.84	23.00	1
		1	25	22.75	22.94	22.86	23.00	1
		1	49	22.81	22.90	22.90	23.00	1
10	16-QAM	25	0	21.83	21.93	21.92	22.00	2
		25	12	21.78	21.77	21.87	22.00	2
		25	25	21.91	21.95	21.87	22.00	2
		50	0	21.81	21.77	21.84	22.00	2
		1	0	21.88	21.92	21.82	22.00	2
		1	25	21.79	21.90	21.77	22.00	2
		1	49	21.82	21.81	21.78	22.00	2
10	64-QAM	25	0	20.85	20.80	20.78	21.00	3
		25	12	20.83	20.81	20.82	21.00	3
		25	25	20.90	20.93	20.79	21.00	3
		50	0	20.81	20.86	20.83	21.00	3

t (886-2) 2299-3279

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

f (886-2) 2298-0488

www.sgs.com.tw Member of SGS Group



Page: 63 of 255

			LTE	Band 2				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	(dBm)	Target	MDD
	Frequency (MHz)				1880	1907.5	Power + Max. Tolerance	Allowed per
	Channel				18900	19175	(dBm)	JGFF(UB)
		1	0	23.86	23.94	23.82	24.00	0
		1	12	23.75	23.81	23.84	24.00	0
		1	24	23.94	23.83	23.93	24.00	0
5 QPSK	QPSK	12	0	22.84	22.93	22.76	23.00	1
		12	6	22.83	22.86	22.79	23.00	3GPP(dB) 0 0 0 1 1 1 1 1 1 2 2 2 2 2 2 2 3 3 3
		12	13	22.84	22.75	22.87	23.00	1
		25	0	22.94	22.87	22.85	23.00	1
		1	0	22.87	22.91	22.92	23.00	1
		1	12	22.80	22.92	22.92	23.00	1
		1	24	22.77	22.77	22.81	23.00	1
5	16-QAM	12	0	21.84	21.79	21.90	22.00	2
		12	6	21.80	21.82	21.94	22.00	2
		12	13	21.89	21.92	21.93	22.00	2
		25	0	21.94	21.84	21.92	22.00	2
		1	0	21.95	21.93	21.80	22.00	2
		1	12	21.82	21.78	21.89	22.00	2
		1	24	21.91	21.77	21.91	22.00	2
5	64-QAM	12	0	20.95	20.84	20.81	21.00	3
		12	6	20.94	20.80	20.78	21.00	3
		12	13	20.93	20.89	20.78	21.00	3
		25	0	20.79	20.81	20.85	21.00	3



Page: 64 of 255

			LTE	Band 2				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	(dBm)	Target Power + MP	MDD
	Frequenc	y (MHz)		1851.5	1880	1908.5	Max. Tolerance	MPR Allowed per 3GPP(dB)
	Channel				18900	19185	(dBm)	JGFF(UD)
		1	0	23.76	23.79	23.79	24.00	0
		1	7	23.76	23.90	23.79	24.00	0
		1	14	23.84	23.95	23.91	24.00	0
3	QPSK	8	0	22.91	22.87	22.85	23.00	1
		8	4	22.75	22.94	22.87	23.00	1
		8	7	22.84	22.92	22.91	23.00	1
		15	0	22.84	22.81	22.79	23.00	1
		1	0	22.75	22.78	22.95	23.00	1
		1	7	22.95	22.79	22.80	23.00	1
		1	14	22.84	22.88	22.81	23.00	1
3	16-QAM	8	0	21.78	21.83	21.87	22.00	2
		8	4	21.80	21.87	21.80	22.00	2
		8	7	21.79	21.84	21.88	22.00	2
		15	0	21.84	21.86	21.80	22.00	2
		1	0	21.75	21.77	21.87	22.00	2
		1	7	21.80	21.93	21.94	22.00	2
		1	14	21.77	21.90	21.76	22.00	2
3	64-QAM	8	0	20.85	20.84	20.94	21.00	3
		8	4	20.78	20.90	20.87	21.00	3
		8	7	20.84	20.95	20.95	21.00	3
		15	0	20.81	20.81	20.90	21.00	3

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 65 of 255

			LTE	Band 2				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	Target Power +	MPR		
	Frequenc	y (MHz)		1850.7	1880	1909.3	Max. Tolerance	Allowed per 3GPP(dB)
	Channel				18900	19193	(dBm)	JGFF(UD)
		1	0	23.94	23.91	23.79	24.00	0
		1	2	23.79	23.88	23.85	24.00	0
		1	5	23.77	23.80	23.79	24.00	0
1.4	QPSK	3	0	22.76	22.80	22.81	24.00	0
		3	2	22.79	22.81	22.75	24.00	0
		3	3	22.84	22.92	22.93	24.00	0
		6	0	22.83	22.93	22.89	23.00	1
		1	0	22.82	22.79	22.94	23.00	1
		1	2	22.81	22.76	22.85	23.00	1
		1	5	22.93	22.83	22.87	23.00	1
1.4	16-QAM	3	0	21.78	21.75	21.80	23.00	1
		3	2	21.92	21.88	21.81	23.00	1
		3	3	21.86	21.82	21.90	23.00	1
		6	0	21.82	21.84	21.85	22.00	2
		1	0	21.76	21.88	21.93	22.00	2
		1	2	21.79	21.82	21.81	22.00	2
		1	5	21.77	21.80	21.93	22.00	2
1.4	64-QAM	3	0	20.86	20.82	20.79	22.00	2
		3	2	20.91	20.93	20.90	22.00	2
		3	3	20.89	20.88	20.77	22.00	2
		6	0	20.93	20.88	20.84	21.00	3

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

台灣檢驗科技股份有限公司

f (886-2) 2298-0488



Page: 66 of 255

			LTE	Band 4				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	Target Power +	MPR	
	Frequenc	y (MHz)		1720	1732.5	1745	Max. Tolerance	Allowed per 3GPP(dB)
	Channel				20175	20300	(dBm)	JOIT (UD)
		1	0	23.97	23.89	23.91	24.00	0
		1	50	23.88	23.81	23.80	24.00	0
		1	99	23.72	23.75	23.77	24.00	0
20	QPSK	50	0	22.83	22.75	22.85	23.00	1
		50	25	22.72	22.84	22.82	23.00	1
		50	50	22.91	22.80	22.87	23.00	1
		100	0	22.90	22.74	22.76	23.00	1
		1	0	22.82	22.75	22.83	23.00	1
		1	50	22.89	22.77	22.74	23.00	1
		1	99	22.90	22.89	22.72	23.00	1
20	16-QAM	50	0	21.83	21.75	21.86	22.00	2
		50	25	21.80	21.75	21.74	22.00	2
		50	50	21.79	21.83	21.75	22.00	2
		100	0	21.75	21.84	21.76	22.00	2
		1	0	21.78	21.82	21.89	22.00	2
		1	50	21.77	21.79	21.71	22.00	2
		1	99	21.78	21.75	21.84	22.00	2
20	64-QAM	50	0	20.90	20.76	20.88	21.00	3
		50	25	20.81	20.71	20.84	21.00	3
		50	50	20.83	20.72	20.73	21.00	3
		100	0	20.84	20.90	20.74	21.00	3

t (886-2) 2299-3279

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

f (886-2) 2298-0488



Page: 67 of 255

			LTE	Band 4				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	Target Power +	MPR	
	Frequenc	y (MHz)		1717.5	1732.5	1747.5	Max. Tolerance	Allowed per 3GPP(dB)
	Channel				20175	20325	(dBm)	COLL (GD)
		1	0	23.79	23.86	23.75	24.00	0
		1	36	23.71	23.85	23.72	24.00	0
		1	74	23.84	23.84	23.76	24.00	0
15	QPSK	36	0	22.86	22.79	22.73	23.00	1
		36	18	22.89	22.81	22.87	23.00	1
		36	37	22.78	22.87	22.80	23.00	1
		75	0	22.77	22.90	22.83	23.00	1
		1	0	22.84	22.72	22.81	23.00	1
		1	36	22.79	22.85	22.87	23.00	1
		1	74	22.87	22.78	22.80	23.00	1
15	16-QAM	36	0	21.85	21.90	21.82	22.00	2
		36	18	21.79	21.85	21.88	22.00	2
		36	37	21.76	21.79	21.75	22.00	2
		75	0	21.88	21.74	21.85	22.00	2
		1	0	21.73	21.72	21.72	22.00	2
		1	36	21.89	21.78	21.83	22.00	0 0 1 1 1 1 1 1 1 2 2 2 2 2 2 2 2 2 3
		1	74	21.73	21.86	21.89	22.00	2
15	64-QAM	36	0	20.77	20.79	20.82	21.00	3
		36	18	20.88	20.86	20.72	21.00	3
		36	37	20.86	20.85	20.89	21.00	3
		75	0	20.81	20.72	20.91	21.00	3

t (886-2) 2299-3279

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

f (886-2) 2298-0488



Page: 68 of 255

			LTE	Band 4				
BW(MHz)	Modulation	RB Size	RB Offset	Conducted power (dBm) Target Power +				
	Frequenc	y (MHz)		1715	1732.5	1750	Max. Tolerance	MPR Allowed per 3GPP(dB)
	Channel				20175	20350	(dBm)	OCI I (GD)
		1	0	23.88	23.90	23.87	24.00	0
		1	25	23.86	23.85	23.83	24.00	0
		1	49	23.83	23.80	23.86	24.00	0
10	QPSK	25	0	22.88	22.89	22.87	23.00	1
		25	12	22.73	22.74	22.84	23.00	1
		25	25	22.79	22.72	22.84	23.00	1
		50	0	22.74	22.74	22.88	23.00	1
		1	0	22.74	22.74	22.82	23.00	1
		1	25	22.81	22.87	22.88	23.00	1
		1	49	22.84	22.73	22.87	23.00	1
10	16-QAM	25	0	21.90	21.87	21.82	22.00	2
		25	12	21.72	21.79	21.88	22.00	2
		25	25	21.76	21.86	21.75	22.00	2
		50	0	21.75	21.89	21.74	22.00	2
		1	0	21.90	21.87	21.79	22.00	2
		1	25	21.90	21.78	21.79	22.00	2
		1	49	21.73	21.89	21.78	22.00	2
10	64-QAM	25	0	20.78	20.83	20.80	21.00	3
		25	12	20.88	20.87	20.87	21.00	3
		25	25	20.77	20.77	20.79	21.00	3
1		50	0	20.78	20.88	20.72	21.00	3

台灣檢驗科技股份有限公司



Page: 69 of 255

			LTE	Band 4				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	Target Power +	MPR		
	Frequenc	y (MHz)		1712.5	1732.5	1752.5	Max. Tolerance	Allowed per
	Channel				20175	20375	(dBm)	COLL (GB)
		1	0	23.77	23.87	23.86	24.00	0
		1	12	23.85	23.76	23.79	24.00	0
		1	24	23.82	23.89	23.79	24.00	0
5	QPSK	12	0	22.88	22.76	22.89	23.00	1
		12	6	22.77	22.76	22.78	23.00	1
		12	13	22.75	22.72	22.77	23.00	3GPP(dB) 0 0 0 1
		25	0	22.89	22.71	22.88	23.00	1
		1	0	22.77	22.86	22.73	23.00	1
		1	12	22.76	22.88	22.85	23.00	1
		1	24	22.86	22.87	22.88	23.00	1
5	16-QAM	12	0	21.87	21.72	21.71	22.00	2
		12	6	21.71	21.78	21.84	22.00	2
		12	13	21.76	21.80	21.79	22.00	2
		25	0	21.85	21.86	21.79	22.00	2
		1	0	21.77	21.89	21.80	22.00	2
		1	12	21.84	21.83	21.72	22.00	2
		1	24	21.87	21.80	21.73	22.00	2
5	64-QAM	12	0	20.80	20.74	20.83	21.00	3
		12	6	20.91	20.76	20.87	21.00	3
		12	13	20.75	20.79	20.86	21.00	3
		25	0	20.81	20.71	20.87	21.00	3

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

f (886-2) 2298-0488



Page: 70 of 255

			LTE	Band 4				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	(dBm)	Target	MDD
	Frequency (MHz)				1732.5	1753.5	Power + Max.	Allowed per
	Channel				20175	20385	Tolerance (dBm)	3GPP(dB) 0 0 0 1 1 1 1 1 1 2 2 2 2 2 2 2 3 3 3 3
		1	0	23.88	23.83	23.75	24.00	0
		1	7	23.81	23.87	23.72	24.00	0
		1	14	23.91	23.81	23.73	24.00	0
3	QPSK	8	0	22.91	22.82	22.80	23.00	1
		8	4	22.84	22.81	22.86	23.00	1
		8	7	22.72	22.81	22.81	23.00	1
		15	0	22.86	22.76	22.79	23.00	1
		1	0	22.77	22.89	22.91	23.00	1
		1	7	22.76	22.82	22.79	23.00	1
		1	14	22.85	22.85	22.91	23.00	1
3	16-QAM	8	0	21.84	21.88	21.77	22.00	2
		8	4	21.73	21.76	21.86	22.00	2
		8	7	21.86	21.74	21.72	22.00	2
		15	0	21.86	21.79	21.84	22.00	2
		1	0	21.86	21.71	21.74	22.00	2
		1	7	21.78	21.77	21.75	22.00	2
		1	14	21.87	21.90	21.73	22.00	2
3	64-QAM	8	0	20.83	20.85	20.76	21.00	3
		8	4	20.72	20.76	20.78	21.00	3
		8	7	20.87	20.80	20.77	21.00	3
		15	0	20.71	20.90	20.84	21.00	3

台灣檢驗科技股份有限公司



Page: 71 of 255

			LTE	Band 4				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	(dBm)	Target	MDD
	Frequenc	y (MHz)		1710.7	1732.5	1754.3	Power + Max. Tolerance	Allowed per
	Channel				20175	20393	(dBm)	3GPP(dB) 0 0 0 0 0 1 1 1 1 1 1 2 2 2 2 2
		1	0	23.87	23.76	23.85	24.00	0
		1	2	23.91	23.80	23.79	24.00	0
		1	5	23.85	23.88	23.76	24.00	0
1.4	QPSK	3	0	22.81	22.90	22.74	24.00	0
		3	2	22.76	22.90	22.86	24.00	Allowed per 3GPP(dB) 0 0 0 0 0 1 1 1 1 1 1 2 2 2 2 2 2 2 2
		3	3	22.88	22.72	22.84	24.00	0
		6	0	22.86	22.77	22.79	23.00	1
		1	0	22.75	22.73	22.76	23.00	1
		1	2	22.84	22.75	22.88	23.00	1
		1	5	22.74	22.80	22.86	23.00	1
1.4	16-QAM	3	0	21.86	21.83	21.71	23.00	1
		3	2	21.77	21.85	21.72	23.00	1
		3	3	21.90	21.86	21.74	23.00	1
		6	0	21.72	21.71	21.80	22.00	2
		1	0	21.88	21.72	21.75	22.00	2
		1	2	21.73	21.75	21.81	22.00	2
		1	5	21.88	21.89	21.71	22.00	2
1.4	64-QAM	3	0	20.90	20.82	20.72	22.00	2
		3	2	20.74	20.77	20.72	22.00	2
		3	3	20.87	20.83	20.87	22.00	2
		6	0	20.86	20.89	20.82	21.00	3

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279 台灣檢驗科技股份有限公司

f (886-2) 2298-0488



Page: 72 of 255

			LTE	Band 5				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	Target Power +	MPR	
	Frequenc	y (MHz)		829	836.5	844	Max. Tolerance	Allowed per 3GPP(dB)
	Channel				20525	20600	(dBm)	OOI I (ub)
		1	0	23.89	23.91	23.87	24.00	0
		1	25	23.71	23.69	23.84	24.00	0
		1	49	23.74	23.83	23.80	24.00	0
10	QPSK	25	0	22.69	22.65	22.90	23.00	1
		25	12	22.77	22.84	22.84	23.00	1
		25	25	22.81	22.83	22.78	23.00	1
		50	0	22.74	22.73	22.83	23.00	1
		1	0	22.72	22.73	22.77	23.00	1
		1	25	22.65	22.68	22.70	23.00	1
		1	49	22.73	22.79	22.79	23.00	1
10	16-QAM	25	0	21.80	21.68	21.84	22.00	2
		25	12	21.80	21.72	21.74	22.00	2
		25	25	21.69	21.81	21.84	22.00	2
		50	0	21.82	21.78	21.79	22.00	2
		1	0	21.82	21.67	21.65	22.00	2
		1	25	21.66	21.74	21.73	22.00	2
		1	49	21.82	21.76	21.69	22.00	2
10	64-QAM	25	0	20.80	20.77	20.66	21.00	3
		25	12	20.81	20.82	20.75	21.00	3
		25	25	20.72	20.85	20.72	21.00	3
		50	0	20.80	20.80	20.79	21.00	3

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 73 of 255

			LTE	Band 5				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	(dBm)	Target Power +	MDD
	Frequency (MHz)				836.5	846.5	Max. Tolerance	Allowed per
	Channel				20525	20625	(dBm)	3GPP(dB) 0 0 0 1 1 1 1 1 1 2 2 2 2 2 2 2 3 3 3 3
		1	0	23.76	23.84	23.69	24.00	0
		1	12	23.82	23.83	23.72	24.00	0
		1	24	23.80	23.71	23.81	24.00	0
5	5 QPSK	12	0	22.67	22.83	22.70	23.00	1
		12	6	22.80	22.83	22.85	23.00	1
		12	13	22.68	22.79	22.75	23.00	1
		25	0	22.85	22.83	22.80	23.00	1
		1	0	22.76	22.81	22.75	23.00	1
		1	12	22.69	22.82	22.79	23.00	1
		1	24	22.71	22.76	22.72	23.00	1
5	16-QAM	12	0	21.82	21.79	21.80	22.00	
		12	6	21.79	21.66	21.73	22.00	2
		12	13	21.65	21.69	21.73	22.00	2
		25	0	21.85	21.71	21.81	22.00	2
		1	0	21.77	21.76	21.73	22.00	
1		1	12	21.72	21.80	21.81	22.00	
		1	24	21.67	21.73	21.80	22.00	
5	64-QAM	12	0	20.75	20.84	20.69	21.00	3
		12	6	20.83	20.70	20.84	21.00	3
		12	13	20.78	20.76	20.68	21.00	3
		25	0	20.73	20.67	20.69	21.00	3



Page: 74 of 255

			LTE	Band 5				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	(dBm)	Target Power +	MDD
	Frequenc	y (MHz)		825.5	836.5	847.5	Max. Tolerance	Allowed per
	Channel				20525	20635	(dBm)	•
		1	0	23.66	23.69	23.72	24.00	0
	3 QPSK	1	7	23.79	23.76	23.67	24.00	0
		1	14	23.79	23.85	23.75	24.00	0
3		8	0	22.82	22.68	22.67	23.00	1
		8	4	22.66	22.67	22.68	23.00	1
		8	7	22.68	22.76	22.75	23.00	1
		15	0	22.73	22.81	22.70	23.00	1
		1	0	22.66	22.71	22.69	23.00	1
		1	7	22.69	22.71	22.68	23.00	1
		1	14	22.81	22.75	22.70	23.00	1
3	16-QAM	8	0	21.83	21.67	21.69	22.00	2
		8	4	21.66	21.84	21.75	22.00	2
		8	7	21.76	21.81	21.77	22.00	2
		15	0	21.72	21.77	21.75	22.00	2
		1	0	21.74	21.79	21.78	22.00	2
		1	7	21.80	21.78	21.67	22.00	2
		1	14	21.69	21.84	21.79	22.00	2
3	64-QAM	8	0	20.82	20.68	20.70	21.00	3
		8	4	20.83	20.82	20.82	21.00	3
		8	7	20.75	20.82	20.71	21.00	3
		15	0	20.76	20.69	20.81	21.00	3

f (886-2) 2298-0488



Page: 75 of 255

			LTE	Band 5				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	(dBm)	Target Power +	MDD
	Frequency (MHz)				836.5	848.3	Max. Tolerance	Allowed per
	Channel				20525	20643	(dBm)	OCI I (GD)
		1	0	23.79	23.72	23.68	24.00	0
		1	2	23.65	23.81	23.73	24.00	0
		1	5	23.72	23.70	23.82	24.00	0
1.4	1.4 QPSK	3	0	23.80	23.75	23.67	24.00	0
		3	2	23.75	23.77	23.74	24.00	3GPP(dB) 0 0
		3	3	23.70	23.68	23.69	24.00	0
		6	0	22.81	22.75	22.66	23.00	1
		1	0	22.66	22.77	22.77	23.00	1
		1	2	22.69	22.65	22.71	23.00	1
		1	5	22.80	22.70	22.79	23.00	1
1.4	16-QAM	3	0	22.81	22.74	22.79	23.00	1
		3	2	22.68	22.68	22.78	23.00	1
		3	3	22.76	22.72	22.80	23.00	1
		6	0	21.81	21.68	21.71	22.00	2
		1	0	21.73	21.71	21.71	22.00	2
		1	2	21.75	21.68	21.73	22.00	2
		1	5	21.69	21.79	21.66	22.00	2
1.4	64-QAM	3	0	21.79	21.72	21.66	22.00	2
		3	2	21.68	21.79	21.74	22.00	2
		3	3	21.80	21.71	21.81	22.00	2
,		6	0	20.67	20.85	20.73	21.00	3

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 76 of 255

			LTE	Band 7				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	(dBm)	Target Power +	MDD
	Frequency (MHz)				2535	2560	Max. Tolerance	Allowed per
	Channel				21100	21350	(dBm)	+ MPR Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
		1	0	23.77	23.64	23.58	24.00	0
		1	50	23.43	23.35	23.46	24.00	0
		1	99	23.43	23.53	23.44	24.00	0
20	20 QPSK	50	0	22.37	22.47	22.35	23.00	1
		50	25	22.45	22.47	22.40	23.00	Allowed per 3GPP(dB) 0 0 0 1 1 1 1 1 2 2 2 2 2 2 2 3
		50	50	22.50	22.45	22.39	23.00	1
		100	0	22.49	22.41	22.39	23.00	1
		1	0	22.46	22.50	22.36	23.00	1
		1	50	22.52	22.48	22.47	23.00	1
		1	99	22.50	22.37	22.53	23.00	1
20	16-QAM	50	0	21.39	21.44	21.36	22.00	2
		50	25	21.37	21.44	21.50	22.00	2
		50	50	21.36	21.50	21.39	22.00	2
		100	0	21.35	21.50	21.48	22.00	2
		1	0	21.47	21.51	21.38	22.00	2
		1	50	21.43	21.50	21.40	22.00	2
		1	99	21.52	21.41	21.45	22.00	2
20	64-QAM	50	0	20.53	20.51	20.42	21.00	3
		50	25	20.35	20.39	20.47	21.00	3
		50	50	20.36	20.49	20.44	21.00	3
		100	0	20.51	20.51	20.53	21.00	3

台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279

f (886-2) 2298-0488 www.sgs.com.tw



Page: 77 of 255

			LTE	Band 7				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	(dBm)	Target Power +	MDD
	Frequency (MHz)				2535	2562.5	Max. Tolerance	Allowed per
	Channel				21100	21375	(dBm)	MPR Allowed per 3GPP(dB) 0 0 0 1 1 1 1 1 1 2 2 2 2 2 2 2 2 3 3 3 3
		1	0	23.48	23.51	23.51	24.00	0
		1	36	23.40	23.49	23.52	24.00	0
		1	74	23.41	23.54	23.44	24.00	0
15	15 QPSK	36	0	22.49	22.39	22.40	23.00	1
		36	18	22.52	22.55	22.52	23.00	1
		36	37	22.39	22.38	22.45	23.00	1
		75	0	22.36	22.38	22.45	23.00	1
		1	0	22.40	22.50	22.36	23.00	1
		1	36	22.36	22.42	22.41	23.00	1
		1	74	22.44	22.45	22.51	23.00	1
15	16-QAM	36	0	21.40	21.41	21.41	22.00	2
		36	18	21.40	21.49	21.45	22.00	2
		36	37	21.42	21.38	21.40	22.00	2
		75	0	21.41	21.48	21.50	22.00	2
		1	0	21.42	21.47	21.49	22.00	2
		1	36	21.47	21.52	21.41	22.00	2
		1	74	21.42	21.46	21.36	22.00	2
15	64-QAM	36	0	20.37	20.41	20.37	21.00	3
		36	18	20.55	20.43	20.46	21.00	3
		36	37	20.53	20.37	20.53	21.00	3
ı		75	0	20.46	20.39	20.45	21.00	3

f (886-2) 2298-0488



Page: 78 of 255

			LTE	Band 7				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	(dBm)	Target Power +	MPR
	Frequency (MHz)			2505	2535	2565	Max. Tolerance	Allowed per 3GPP(dB)
	Channel				21100	21400	(dBm)	OCI I (dD)
		1	0	23.40	23.46	23.35	24.00	0
		1	25	23.44	23.36	23.46	24.00	0
		1	49	23.44	23.44	23.37	24.00	0
10	10 QPSK	25	0	22.54	22.44	22.42	23.00	1
		25	12	22.55	22.46	22.40	23.00	1
		25	25	22.54	22.53	22.43	23.00	1
		50	0	22.51	22.54	22.48	23.00	1
		1	0	22.50	22.39	22.45	23.00	1
		1	25	22.48	22.46	22.53	23.00	1
		1	49	22.52	22.40	22.45	23.00	1
10	16-QAM	25	0	21.38	21.37	21.46	22.00	2
		25	12	21.45	21.41	21.53	22.00	2
		25	25	21.45	21.46	21.54	22.00	2
		50	0	21.37	21.35	21.50	22.00	2
		1	0	21.47	21.43	21.38	22.00	2
		1	25	21.50	21.41	21.37	22.00	2
		1	49	21.52	21.48	21.52	22.00	2
10	64-QAM	25	0	20.53	20.44	20.37	21.00	3
		25	12	20.36	20.49	20.48	21.00	3
		25	25	20.41	20.36	20.36	21.00	3
		50	0	20.39	20.44	20.52	21.00	3

台灣檢驗科技股份有限公司



Page: 79 of 255

			LTE	Band 7				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	(dBm)	Target Power +	MPR
	Frequency (MHz)				2535	2567.5	Max. Tolerance	Allowed per 3GPP(dB)
	Channel				21100	21425	(dBm)	OOI I (GD)
		1	0	23.41	23.41	23.50	24.00	0
		1	12	23.39	23.47	23.36	24.00	0
		1	24	23.42	23.44	23.41	24.00	0
5	5 QPSK	12	0	22.52	22.39	22.41	23.00	1
		12	6	22.46	22.46	22.47	23.00	1
		12	13	22.53	22.52	22.36	23.00	1
		25	0	22.50	22.40	22.47	23.00	1
		1	0	22.48	22.39	22.40	23.00	1
		1	12	22.51	22.50	22.51	23.00	1
		1	24	22.50	22.37	22.54	23.00	1
5	16-QAM	12	0	21.45	21.52	21.48	22.00	2
		12	6	21.43	21.36	21.52	22.00	2
		12	13	21.36	21.51	21.39	22.00	2
		25	0	21.52	21.44	21.47	22.00	2
		1	0	21.53	21.36	21.41	22.00	2
		1	12	21.48	21.50	21.52	22.00	2
		1	24	21.52	21.43	21.45	22.00	2
5	64-QAM	12	0	20.55	20.41	20.35	21.00	3
		12	6	20.47	20.43	20.35	21.00	3
		12	13	20.44	20.51	20.52	21.00	3
		25	0	20.35	20.43	20.53	21.00	3

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 80 of 255

			LTE	Band 12				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	(dBm)	Target Power +	MDD
	Frequency (MHz)				707.5	711	Max. Tolerance	Allowed per
	Channel				23095	23130	(dBm)	3GPP(dB) 0 0 0 1 1 1 1 1 1 2 2 2 2 2 2 2 3 3 3 3
		1	0	23.12	23.08	23.02	24.00	0
1		1	25	23.04	23.11	23.09	24.00	0
1 1		1	49	22.99	23.08	23.03	24.00	0
10	10 QPSK	25	0	22.05	21.96	22.12	23.00	1
		25	12	21.97	22.04	21.96	23.00	1
		25	25	22.04	22.00	22.14	23.00	1
		50	0	22.08	22.06	21.99	23.00	1
		1	0	22.13	22.14	22.03	23.00	1
		1	25	22.12	22.14	22.02	23.00	1
		1	49	21.99	22.08	22.02	23.00	1
10	16-QAM	25	0	20.97	20.97	21.05	22.00	2
		25	12	20.99	21.10	20.97	22.00	2
		25	25	20.99	21.15	20.95	22.00	2
		50	0	21.11	21.07	21.03	22.00	2
		1	0	21.03	21.07	21.12	22.00	2
		1	25	20.96	20.96	21.12	22.00	2
		1	49	20.98	21.14	21.10	22.00	2
10	64-QAM	25	0	20.03	20.11	19.98	21.00	3
1		25	12	20.09	20.09	19.98	21.00	3
		25	25	20.13	19.99	20.10	21.00	3
		50	0	20.10	20.09	20.11	21.00	3



Page: 81 of 255

			LTE	Band 12				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	(dBm)	Target Power +	MDD
	Frequency (MHz)				707.5	713.5	Max. Tolerance	Allowed per
	Channel				23095	23155	(dBm)	MPR Allowed per 3GPP(dB) 0 0 0 1 1 1 1 1 2 2 2 2 2 2 2 3 3 3 3
		1	0	22.97	23.01	22.93	24.00	0
		1	12	23.05	23.11	23.10	24.00	0
		1	24	23.05	22.99	22.99	24.00	0
5	5 QPSK	12	0	21.99	21.94	22.00	23.00	1
		12	6	22.12	22.02	22.12	23.00	1
		12	13	22.13	22.04	21.99	23.00	Allowed per 3GPP(dB) 0 0 0 1 1 1 1 1 1 2 2 2 2 2 2 2 3 3 3
		25	0	22.01	22.08	22.03	23.00	1
		1	0	22.01	21.92	22.01	23.00	1
		1	12	22.14	21.94	22.11	23.00	1
		1	24	22.03	22.11	21.94	23.00	1
5	16-QAM	12	0	21.04	21.09	20.98	22.00	
		12	6	20.99	20.94	21.05	22.00	2
		12	13	21.01	21.00	21.07	22.00	2
		25	0	21.03	21.03	20.97	22.00	2
		1	0	20.97	21.05	21.00	22.00	
		1	12	21.03	21.04	20.94	22.00	
		1	24	21.11	20.94	21.07	22.00	
5	64-QAM	12	0	20.00	20.07	20.05	21.00	3
		12	6	20.03	20.02	20.08	21.00	3
	[12	13	20.15	20.02	19.96	21.00	3
		25	0	20.12	20.09	20.05	21.00	3

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

台灣檢驗科技股份有限公司

f (886-2) 2298-0488



Page: 82 of 255

			LTE	Band 12				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	(dBm)	Target Power +	MPR
	Frequency (MHz)				707.5	714.5	Max. Tolerance	Allowed per 3GPP(dB)
	Channel				23095	23165	(dBm)	JOH I (db)
	1 0				23.09	23.04	24.00	0
		1	7	22.97	23.02	22.95	24.00	0
		1	14	23.00	23.08	23.11	24.00	0
3 QPSK	8	0	21.94	22.00	22.11	23.00	1	
		8	4	22.09	21.94	21.96	23.00	1
		8	7	22.08	21.95	22.02	23.00	1
		15	0	22.09	21.99	22.04	23.00	1
		1	0	22.11	22.07	22.04	23.00	1
		1	7	21.97	21.94	22.03	23.00	1
		1	14	22.08	21.98	22.11	23.00	1
3	16-QAM	8	0	21.02	21.05	20.96	22.00	2
		8	4	21.03	21.11	21.11	22.00	2
		8	7	21.02	21.10	21.03	22.00	2
		15	0	21.02	21.07	21.02	22.00	2
		1	0	20.97	21.02	20.93	22.00	2
		1	7	21.07	21.04	21.04	22.00	2
		1	14	21.01	21.02	21.03	22.00	2
3	64-QAM	8	0	20.01	20.11	19.93	21.00	3
		8	4	19.97	20.09	19.97	21.00	3
		8	7	20.01	19.94	19.94	21.00	3
		15	0	19.94	20.00	19.97	21.00	3

台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279

f (886-2) 2298-0488 www.sgs.com.tw



Page: 83 of 255

			LTE	Band 12				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	(dBm)	Target Power +	MDD
	Frequency (MHz)				707.5	715.3	Max. Tolerance	Allowed per
	Channel				23095	23173	(dBm)	JOI 1 (UD)
		1	0	23.05	23.03	22.96	24.00	0
		1	2	22.98	23.06	23.06	24.00	0
	1.4 QPSK	1	5	23.01	23.01	22.93	24.00	0
1.4		3	0	22.94	22.98	23.03	24.00	0
		3	2	23.00	22.94	23.06	24.00	0
		3	3	22.96	23.10	23.06	24.00	3GPP(dB) 0 0 0 0 0 0 1 1 1 1 1 1 2 2 2 2 2 2 2
		6	0	22.10	22.06	22.06	23.00	1
		1	0	22.06	22.07	22.03	23.00	1
		1	2	22.02	22.06	21.95	23.00	1
		1	5	22.04	21.98	22.09	23.00	1
1.4	16-QAM	3	0	21.94	22.11	22.10	23.00	1
		3	2	22.01	21.98	22.06	23.00	1
		3	3	22.11	21.95	22.11	23.00	1
		6	0	21.05	21.11	21.06	22.00	2
		1	0	21.02	20.98	21.11	22.00	2
		1	2	21.03	21.06	21.00	22.00	2
		1	5	21.05	20.94	21.09	22.00	2
1.4	64-QAM	3	0	20.94	21.12	21.03	22.00	2
		3	2	20.98	20.93	21.04	22.00	2
		3	3	21.11	20.99	21.03	22.00	2
		6	0	20.05	19.95	19.98	21.00	3

f (886-2) 2298-0488

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279



Page: 84 of 255

			LTE	Band 13				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ducted power (dBm)	Target Power +	MPR
	Frequency (MHz)				782	-	Max.	Allowed per
	Channel				23230	-	Tolerance (dBm)	3GPP(dB)
		1	0		23.31		24.00	0
		1	25		23.27		24.00	0
		1	49		23.29		24.00	0
10	10 QPSK	25	0		22.22		23.00	1
		25	12		22.25		23.00	1
		25	25		22.13		23.00	1
		50	0		22.24		23.00	1
		1	0		22.12		23.00	1
		1	25		22.14		23.00	1
		1	49		22.14		23.00	1
10	16-QAM	25	0		21.20		22.00	2
		25	12		21.09		22.00	2
		25	25		21.28		22.00	2
		50	0		21.22		22.00	2
		1	0		21.19		22.00	2
		1	25		21.12		22.00	2
		1	49		21.26		22.00	2
10	64-QAM	25	0		20.26		21.00	3
		25	12		20.26		21.00	3
		25	25		20.25		21.00	3
		50	0		20.21		21.00	3

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 85 of 255

			LTE	Band 13				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	(dBm)	Target Power +	MPR
	Frequenc	y (MHz)		779.5	782	784.5	Max. Tolerance	Allowed per 3GPP(dB)
	Channel 1 0				23230	23255	(dBm)	3011 (db)
		0	23.17	23.22	23.24	24.00	0	
		1	12	23.17	23.17	23.23	24.00	0
		1	24	23.16	23.22	23.23	24.00	0
5	QPSK	12	0	22.20	22.21	22.26	23.00	1
		12	6	22.29	22.14	22.21	23.00	1
		12	13	22.27	22.21	22.19	23.00	1
		25	0	22.13	22.14	22.19	23.00	1
		1	0	22.24	22.29	22.16	23.00	1
		1	12	22.27	22.11	22.22	23.00	1
		1	24	22.15	22.28	22.15	23.00	1
5	16-QAM	12	0	21.18	21.12	21.27	22.00	2
		12	6	21.22	21.17	21.25	22.00	2
		12	13	21.13	21.25	21.16	22.00	2
		25	0	21.28	21.29	21.14	22.00	2
		1	0	21.19	21.19	21.22	22.00	2
		1	12	21.20	21.18	21.10	22.00	2
		1	24	21.13	21.27	21.29	22.00	2
5	64-QAM	12	0	20.23	20.14	20.10	21.00	3
		12	6	20.11	20.25	20.10	21.00	3
		12	13	20.19	20.13	20.28	21.00	0 0 1 1 1 1 1 1 1 2 2 2 2 2 2 2 2 2 3
		25	0	20.21	20.11	20.11	21.00	3



Page: 86 of 255

			LTE	Band 25				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	(dBm)	Target Power +	MPR
	Frequenc	y (MHz)		1860	1882.5	1905	Max. Tolerance	Allowed per 3GPP(dB)
	Channel				26365	26590	(dBm)	OOI I (db)
		1	0	23.11	23.15	23.09	24.00	0
		1	50	23.04	22.94	23.07	24.00	0
		1	99	22.95	23.05	23.02	24.00	0
20	QPSK	50	0	21.95	21.91	22.05	23.00	1
		50	25	22.02	21.95	21.98	23.00	1
		50	50	21.93	22.08	22.02	23.00	1
		100	0	21.97	21.97	22.08	23.00	1
		1	0	22.01	21.93	21.99	23.00	1
		1	50	22.05	21.98	22.03	23.00	1
		1	99	21.95	22.07	22.00	23.00	1
20	16-QAM	50	0	21.04	21.04	20.90	22.00	2
		50	25	21.07	20.92	20.91	22.00	2
		50	50	20.89	20.92	21.07	22.00	2
		100	0	20.99	21.06	21.01	22.00	2
		1	0	20.99	21.01	20.98	22.00	2
		1	50	20.89	20.97	21.07	22.00	2
		1	99	20.93	20.90	20.93	22.00	2
20	64-QAM	50	0	20.02	19.91	19.94	21.00	3
		50	25	19.98	20.02	20.05	21.00	3
		50	50	19.98	19.94	20.09	21.00	3
		100	0	20.06	19.91	20.00	21.00	3


No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 87 of 255

			LTE	Band 25				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	(dBm)	Target Power +	MDD
	Frequenc		1857.5	1882.5	1907.5	Max. Tolerance	Allowed per	
	Channel				26365	26615	(dBm)	COLL (GD)
		0	23.08	23.05	23.07	24.00	0	
		1	36	23.08	23.06	23.08	24.00	0
		1	74	22.90	23.03	23.08	24.00	0
15	QPSK	36	0	22.06	22.05	21.92	23.00	1
		36	18	22.00	22.01	21.90	23.00	1
		36	37	22.06	21.90	21.99	23.00	1
		75	0	22.04	22.06	22.05	23.00	1
		1	0	21.98	21.92	21.99	23.00	1
		1	36	22.07	22.04	22.06	23.00	1
		1	74	22.02	21.94	21.91	23.00	1
15	16-QAM	36	0	20.95	21.09	20.93	22.00	2
		36	18	21.09	21.04	21.00	22.00	2
		36	37	20.94	21.08	21.05	22.00	2
		75	0	21.07	20.91	20.99	22.00	2
		1	0	21.08	21.06	20.92	22.00	2
		1	36	21.01	20.91	20.96	22.00	2
		1	74	20.90	20.89	21.04	22.00	2
15	64-QAM	36	0	19.89	20.04	20.07	21.00	3
		36	18	20.05	19.99	19.97	21.00	3
		36	37	19.99	20.02	19.92	21.00	3GPP(dB) 0 0 0 1 1 1 1 1 1 2 2 2 2 2 2 2 3
		75	0	19.95	20.05	20.00	21.00	3





Page: 88 of 255

			LTE	Band 25				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	(dBm)	Target	MDD
	Frequenc		1855	1882.5	1910	Power + Max. Tolerance	Allowed per	
	Channel				26365	26640	(dBm)	3GPP(dB) 0 0 0 1 1 1 1 1 1 2 2 2 2 2 2 2 3 3 3
		0	23.01	23.06	23.07	24.00	0	
		1	25	23.02	23.07	22.95	24.00	0
		1	49	23.06	23.07	23.07	24.00	0
10	QPSK	25	0	22.06	22.00	22.03	23.00	1
		25	12	21.92	22.09	21.94	23.00	1
		25	25	22.01	21.95	21.97	23.00	1
		50	0	21.94	22.07	21.94	23.00	1
		1	0	21.96	22.00	21.98	23.00	1
		1	25	22.09	22.03	21.94	23.00	1
		1	49	22.03	21.92	22.07	23.00	1
10	16-QAM	25	0	20.90	20.99	21.02	22.00	2
		25	12	21.04	21.01	21.00	22.00	2
		25	25	21.04	21.03	20.93	22.00	2
		50	0	20.93	21.02	21.00	22.00	2
		1	0	21.04	20.92	21.00	22.00	2
		1	25	21.02	21.00	20.95	22.00	2
		1	49	21.03	20.99	21.07	22.00	2
10	64-QAM	25	0	20.07	20.04	19.94	21.00	3
		25	12	20.06	19.92	19.95	21.00	3
		25	25	20.02	20.00	19.94	21.00	Allowed per 3GPP(dB) 0 0 0 1 1 1 1 1 2 2 2 2 2 2 2 3
		50	0	20.08	19.95	19.91	21.00	3

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279

f (886-2) 2298-0488



Page: 89 of 255

			LTE	Band 25				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	(dBm)	Target Power +	MDD
	Frequenc		1852.5	1882.5	1912.5	Max. Tolerance	Allowed per	
	Channel				26365	26665	(dBm)	COLL (GD)
		0	22.97	22.95	22.94	24.00	0	
		1	12	22.98	23.07	23.08	24.00	0
		1	24	23.06	23.04	22.91	24.00	0
5	QPSK	12	0	22.03	21.91	22.03	23.00	1
		12	6	22.04	21.98	21.90	23.00	1
		12	13	22.04	21.92	22.05	23.00	1
		25	0	21.89	21.91	22.07	23.00	1
		1	0	22.02	21.91	21.91	23.00	1
		1	12	22.07	22.01	21.97	23.00	1
		1	24	22.08	21.98	22.01	23.00	1
5	16-QAM	12	0	20.96	20.96	21.03	22.00	2
		12	6	21.02	21.00	21.06	22.00	2
		12	13	21.07	21.06	21.06	22.00	3GPP(dB) 0 0 0 1 1 1 1 1 1 2 2 2 2 2 2 2 3 3 3
		25	0	20.92	21.05	21.03	22.00	2
		1	0	20.99	20.90	21.06	22.00	2
		1	12	21.06	21.01	20.94	22.00	2
		1	24	21.02	20.92	20.92	22.00	2
5	64-QAM	12	0	19.92	20.00	19.95	21.00	3
		12	6	19.98	20.00	20.02	21.00	3
		12	13	19.92	20.07	19.95	21.00	Allowed pe 3GPP(dB) 0 0 0 1 1 1 1 1 2 2 2 2 2 2 3
		25	0	20.09	20.01	19.90	21.00	3



Page: 90 of 255

			LTE	Band 25				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	(dBm)	Target Power +	MDD
	Frequenc		1851.5	1882.5	1913.5	Max. Tolerance	Allowed per	
	Channel				26365	26675	(dBm)	COLL (GD)
		1	0	23.02	22.92	23.08	24.00	0
		1	7	22.90	22.97	23.03	24.00	0
		1	14	22.97	23.04	22.96	24.00	0
3	QPSK	8	0	21.97	21.89	21.96	23.00	1
		8	4	21.90	21.92	22.08	23.00	1
		8	7	22.03	21.90	22.07	23.00	1
		15	0	22.08	21.96	21.95	23.00	1
		1	0	22.02	21.99	21.97	23.00	1
		1	7	22.09	22.02	21.96	23.00	1
		1	14	21.95	21.94	22.01	23.00	1
3	16-QAM	8	0	20.98	20.90	21.02	22.00	2
		8	4	20.96	20.92	20.95	22.00	2
		8	7	21.01	21.02	21.04	22.00	2
		15	0	20.96	20.94	20.93	22.00	2
		1	0	21.07	20.98	20.94	22.00	2
		1	7	21.01	20.93	21.04	22.00	2
		1	14	21.07	20.94	20.96	22.00	2
3	64-QAM	8	0	19.99	19.97	19.98	21.00	3
		8	4	19.94	20.07	19.96	21.00	3
		8	7	20.05	19.95	20.00	21.00	3GPP(dB) 0 0 1 1 1 1 1 1 2 2 2 2 2 2 3
		15	0	19.95	19.94	20.00	21.00	3

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279

f (886-2) 2298-0488



Page: 91 of 255

			LTE	Band 25				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	(dBm)	Target Power +	MPR
	Frequenc	1850.7	1882.5	1914.3	Max. Tolerance	Allowed per 3GPP(dB)		
	Channel				26365	26683	(dBm)	OCI I (dD)
		0	23.03	23.07	22.96	24.00	0	
		1	2	23.01	22.95	23.05	24.00	0
		1	5	22.98	23.09	22.93	24.00	0
1.4	QPSK	3	0	22.90	22.97	23.03	24.00	0
		3	2	22.92	22.97	22.96	24.00	0
		3	3	22.92	23.05	22.96	24.00	0
		6	0	22.04	22.07	21.92	23.00	1
		1	0	21.94	22.03	22.07	23.00	1
		1	2	22.02	21.99	21.97	23.00	1
		1	5	21.91	22.02	21.97	23.00	1
1.4	16-QAM	3	0	21.98	22.05	22.04	23.00	1
		3	2	21.93	21.91	22.06	23.00	1 1 1
		3	3	22.09	22.09	22.02	23.00	1
		6	0	21.00	21.02	21.02	22.00	2
		1	0	20.91	20.93	20.90	22.00	2
		1	2	21.06	20.90	21.07	22.00	2
		1	5	21.09	20.94	21.07	22.00	2
1.4	64-QAM	3	0	21.04	21.03	20.98	22.00	2
		3	2	20.98	20.99	21.02	22.00	2
		3	3	20.92	21.03	21.09	22.00	1 2 2 2 2 2 2
		6	0	20.08	20.07	19.91	21.00	3

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279

f (886-2) 2298-0488 www.sgs.com.tw



Page: 92 of 255

			LTE Bai	nd 26_FCC				
BW(MHz)	Modulation	RB Size	RB Offset		ucted power	(dBm)	Target	
	Frequenc	821.5	831.5	841.5	Power + Max. Tolerance	Allowed per		
	Channel				26865	26965	(dBm)	3GPP(dB) 0 0 0 1 1 1 1 1 1 2 2 2 2 2 2 2 3 3 3 3
		1	0	23.38	23.41	23.27	24.00	0
		1	36	23.26	23.31	23.16	24.00	0
		1	74	23.24	23.34	23.03	24.00	0
15	QPSK	36	0	22.22	22.26	22.21	23.00	1
		36	18	22.21	22.34	22.08	23.00	1
		36	37	22.21	22.20	22.11	23.00	1
		75	0	22.16	22.21	22.15	23.00	1
		1	0	22.26	22.28	22.18	23.00	1
		1	36	22.09	22.35	22.06	23.00	1
		1	74	22.12	22.32	22.14	23.00	Allowed pe 3GPP(dB) 0 0 0 1 1 1 1 1 2 2 2 2 2 2 2 3 3 3
15	16-QAM	36	0	21.19	21.27	21.16	22.00	2
		36	18	21.27	21.30	21.05	22.00	2
		36	37	21.20	21.26	21.07	22.00	2
		75	0	21.14	21.28	21.20	22.00	2
		1	0	21.20	21.32	21.20	22.00	2
		1	36	21.09	21.28	21.11	22.00	2
		1	74	21.13	21.28	21.14	22.00	2
15	64-QAM	36	0	20.29	20.32	20.07	21.00	3
		36	18	20.24	20.34	34 20.08 2°	21.00	
		36	37	20.23	20.20	20.05	21.00	3
		75	0	20.20	20.31	20.22	21.00	3

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 93 of 255

			LTE Ba	nd 26_FCC				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	(dBm)	Target Power +	MPR
	Frequenc	y (MHz)		819	831.5	844	Max. Tolerance	Allowed per 3GPP(dB)
	Channel				26865	26990	(dBm)	JOI I (db)
		0	23.26	23.13	23.18	24.00	0	
		1	25	23.21	23.19	23.09	24.00	0
		1	49	23.14	23.14	23.14	24.00	0
10	QPSK	25	0	22.12	22.23	22.18	23.00	1
		25	12	22.18	22.13	22.11	23.00	1
		25	25	22.10	22.12	22.24	23.00	1
		50	0	22.29	22.10	22.16	23.00	1
		1	0	22.21	22.10	22.28	23.00	1
		1	25	22.15	22.15	22.24	23.00	1
		1	49	22.28	22.22	22.25	23.00	1
10	16-QAM	25	0	21.13	21.21	21.25	22.00	2
		25	12	21.21	21.15	21.23	22.00	2
		25	25	21.19	21.27	21.28	22.00	2
		50	0	21.15	21.28	21.26	22.00	2
		1	0	21.26	21.23	21.25	22.00	2
1 1		1	25	21.20	21.11	21.29	22.00	2
		1	49	21.11	21.11	21.28	22.00	2
10	64-QAM	25	0	20.11	20.16	20.23	21.00	3
		25	12	20.27	20.27	20.24	21.00	3
		25	25	20.22	20.27	20.23	21.00	3
l		50	0	20.28	20.15	20.13	21.00	3



Page: 94 of 255

			LTE Bar	nd 26_FCC				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	(dBm)	Target Power +	MDD
	Frequenc		816.5	831.5	846.5	Max. Tolerance	Allowed per	
	Channel				26865	27015	(dBm)	JOH (GD)
		0	23.14	23.25	23.11	24.00	0	
		1	12	23.10	23.22	23.19	24.00	0
		1	24	23.22	23.15	23.25	24.00	0
5	QPSK	12	0	22.21	22.15	22.10	23.00	1
		12	6	22.26	22.23	22.09	23.00	1
		12	13	22.23	22.26	22.23	23.00	1
		25	0	22.16	22.10	22.20	23.00	1
		1	0	22.11	22.23	22.12	23.00	1
		1	12	22.11	22.21	22.19	23.00	1
		1	24	22.29	22.25	22.28	23.00	1
5	16-QAM	12	0	21.15	21.12	21.26	22.00	2
		12	6	21.28	21.21	21.11	22.00	2
		12	13	21.24	21.20	21.24	22.00	2
		25	0	21.14	21.17	21.18	22.00	2
		1	0	21.11	21.27	21.24	22.00	2
		1	12	21.14	21.25	21.12	22.00	2
		1	24	21.09	21.29	21.14	22.00	2
5	64-QAM	12	0	20.14	20.19	20.16	21.00	3
		12	6	20.25	20.23	20.13	21.00	3
		12	13	20.25	20.23	20.17	21.00	3GPP(dB) 0 0 1 1 1 1 1 2 2 2 2 2 2 3
		25	0	20.20	20.21	20.22	21.00	3

t (886-2) 2299-3279

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

f (886-2) 2298-0488



Page: 95 of 255

			LTE Bar	nd 26_FCC				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	Target Power +	MPR		
	Frequenc	y (MHz)		815.5	831.5	847.5	Max. Tolerance	Allowed per 3GPP(dB)
	Channel				26865	27025	(dBm)	JOH I (db)
		1	0	23.13	23.18	23.20	24.00	0
		1	7	23.25	23.19	23.24	24.00	0
		1	14	23.16	23.19	23.23	24.00	0
3	QPSK	8	0	22.14	22.22	22.13	23.00	1
		8	4	22.27	22.21	22.22	23.00	1
		8	7	22.22	22.26	22.27	23.00	1
		15	0	22.19	22.11	22.18	23.00	1
		1	0	22.14	22.15	22.22	23.00	1
		1	7	22.11	22.19	22.18	23.00	1
		1	14	22.09	22.18	22.14	23.00	1
3	16-QAM	8	0	21.28	21.14	21.20	22.00	2
		8	4	21.17	21.16	21.24	22.00	2
		8	7	21.28	21.18	21.28	22.00	2
		15	0	21.18	21.20	21.29	22.00	2
		1	0	21.23	21.15	21.09	22.00	2
		1	7	21.16	21.12	21.09	22.00	2
		1	14	21.19	21.24	21.20	22.00	2
3	64-QAM	8	0	20.24	20.17	20.16	21.00	3
		8	4	20.17	20.11	20.26	21.00	3
		8	7	20.16	20.20	20.22	21.00	3
		15	0	20.18	20.14	20.17	21.00	3

f (886-2) 2298-0488

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279



Page: 96 of 255

			LTE Bai	nd 26_FCC				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	(dBm)	Target Power +	MPR
	Frequenc	y (MHz)		814.7	831.5	848.3	Max. Tolerance	Allowed per 3GPP(dB)
	Channel				26865	27033	(dBm)	JOH (GD)
		1	0	23.15	23.21	23.18	24.00	0
1 1		1	2	23.16	23.20	23.24	24.00	0
		1	5	23.10	23.20	23.14	24.00	0
1.4	QPSK	3	0	22.12	22.14	22.18	24.00	0
		3	2	22.16	22.23	22.22	24.00	0
		3	3	22.13	22.13	22.26	24.00	0
		6	0	22.12	22.19	22.10	23.00	1
		1	0	22.14	22.27	22.18	23.00	1
		1	2	22.20	22.20	22.19	23.00	1
		1	5	22.17	22.27	22.11	23.00	1
1.4	16-QAM	3	0	21.19	21.10	21.25	23.00	1
		3	2	21.19	21.09	21.14	23.00	1
		3	3	21.15	21.24	21.28	23.00	1
		6	0	21.24	21.27	21.19	22.00	2
		1	0	21.19	21.13	21.28	22.00	2
1 1		1	2	21.25	21.15	21.10	22.00	2
		1	5	21.23	21.28	21.13	22.00	2
1.4	64-QAM	3	0	20.21	20.11	20.22	22.00	2
		3	2	20.16 20.11 20.16	22.00	2		
		3	3	20.17	20.22	20.14	22.00	2
l		6	0	20.14	20.28	20.11	21.00	3



Page: 97 of 255

			LTE	Band 66					
BW(MHz)	Modulation	RB Size	RB Offset	Cond	Conducted power (dBm) Target Power +				
	Frequenc		1720	1745	1770	Max. Tolerance	Allowed per		
	Channel				132322	132572	(dBm)	MPR Allowed per 3GPP(dB) 0 0 0 1 1 1 1 1 1 2 2 2 2 2 2 2 2 3 3 3 3 3	
		1	0	22.68	23.12	22.59	24.00	0	
		1	50	22.54	23.07	22.52	24.00	0	
		1	99	22.46	23.05	22.43	24.00	0	
20	QPSK	50	0	21.39	22.04	21.49	23.00	1	
		50	25	21.48	21.95	21.46	23.00	1	
		50	50	21.48	22.09	21.54	23.00	1	
		100	0	21.41	22.05	21.49	23.00	1	
		1	0	21.43	21.99	21.36	23.00	1	
		1	50	21.52	22.13	21.53	23.00	1	
		1	99	21.55	22.08	21.37	23.00	1	
20	16-QAM	50	0	20.41	21.15	20.54	22.00	2	
		50	25	20.44	21.07	20.38	22.00	2	
		50	50	20.52	21.03	20.52	22.00	2	
		100	0	20.42	21.06	20.55	22.00	2	
		1	0	20.44	21.12	20.41	22.00	2	
		1	50	20.40	21.04	20.40	22.00	2	
		1	99	20.45	20.99	20.40	22.00	2	
20	64-QAM	50	0	19.48	20.01	19.48	21.00	3	
		50	25	19.48	20.13	19.41	21.00	3	
		50	50	19.40	20.12	19.48	21.00	3	
		100	0	19.40	19.96	19.50	21.00	3	

t (886-2) 2299-3279

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

f (886-2) 2298-0488



Page: 98 of 255

			LTE	Band 66				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	MPR			
	Frequenc	1717.5	1745	1772.5	Power + Max. Tolerance	Allowed per 3GPP(dB)		
	Channel				132322	132597	(dBm)	JOI I (db)
	1 0				23.09	22.54	24.00	0
		1	36	22.46	23.12	22.43	24.00	0
		1	74	22.55	23.11	22.46	24.00	0
15	QPSK	36	0	21.36	21.97	21.45	23.00	1
		36	18	21.38	21.96	21.54	23.00	1
		36	37	21.38	22.06	21.46	23.00	1
		75	0	21.42	22.09	21.36	23.00	1
		1	0	21.44	21.95	21.41	23.00	1
		1	36	21.44	21.97	21.39	23.00	1
		1	74	21.47	22.06	21.50	23.00	1
15	16-QAM	36	0	20.42	21.10	20.43	22.00	2
		36	18	20.39	20.94	20.49	22.00	2
		36	37	20.50	20.99	20.41	22.00	0 0 0 1 1 1 1 1 1 2 2 2 2 2 2 2 2 2 3
		75	0	20.36	21.10	20.53	22.00	2
		1	0	20.51	20.95	20.49	22.00	2
		1	36	20.45	20.98	20.48	22.00	2
		1	74	20.36	21.12	20.38	22.00	2
15	64-QAM	36	0	19.36	20.05	19.51	21.00	3
		36	18	19.35	20.12	19.52	21.00	3
		36	37	19.45	20.12	19.45	21.00	3
		75	0	19.49	20.03	19.49	21.00	3

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Page: 99 of 255

			LTE	Band 66				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	(dBm)	Target Power +	MDD
	Frequenc	y (MHz)		1715	1745	1775	Max. Tolerance	Allowed per
	Channel				132322	132622	(dBm)	0 0 0 1 1 1 1 1 1 1 2 2 2 2 2 2 2 2 2 2
		1	0	22.51	23.11	22.44	24.00	0
		1	25	22.49	22.99	22.36	24.00	0
		1	49	22.36	22.96	22.55	24.00	0
10 QPSK	QPSK	25	0	21.49	21.97	21.37	23.00	1
		25	12	21.45	22.06	21.47	23.00	Allowed per 3GPP(dB) 0 0 0 1 1 1 1 1 2 2 2 2 2 2 2 3 3 3
		25	25	21.55	21.96	21.53	23.00	1
		50	0	21.52	21.94	21.37	23.00	1
		1	0	21.45	22.00	21.42	23.00	1
		1	25	21.46	22.13	21.36	23.00	1
		1	49	21.48	22.02	21.41	23.00	1
10	16-QAM	25	0	20.52	21.07	20.41	22.00	2
		25	12	20.51	21.07	20.41	22.00	2
		25	25	20.40	21.00	20.53	22.00	2
		50	0	20.47	21.13	20.45	22.00	2
		1	0	20.37	20.93	20.48	22.00	2
		1	25	20.42	20.97	20.40	22.00	2
		1	49	20.38	21.01	20.48	22.00	2
10	64-QAM	25	0	19.51	19.97	19.50	21.00	3
		25	12	19.50	20.05	19.46	21.00	3
		25	25	19.46	20.08	19.50	21.00	Allowed per 3GPP(dB) 0 0 0 1 1 1 1 1 2 2 2 2 2 2 2 3 3 3 3
		50	0	19.39	19.96	19.37	21.00	3

台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 100 of 255

			LTE	Band 66				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	MDD			
	Frequenc		1712.5	1745	1777.5	Power + Max. Tolerance	Allowed per	
	Channel				132322	132647	(dBm)	3GPP(dB) 0 0 0 1 1 1 1 1 1 2 2 2 2 2 2 2 3 3 3 3 3
		1	0	22.47	23.06	22.43	24.00	0
		1	12	22.52	23.02	22.48	24.00	0
		1	24	22.47	23.12	22.55	24.00	0
5	QPSK	12	0	21.47	21.97	21.43	23.00	1
		12	6	21.40	22.04	21.50	23.00	1
		12	13	21.48	22.00	21.39	23.00	1
		25	0	21.40	21.99	21.41	23.00	1
		1	0	21.37	22.12	21.37	23.00	1
		1	12	21.41	22.02	21.47	23.00	1
		1	24	21.43	22.06	21.43	23.00	1
5	16-QAM	12	0	20.48	21.00	20.36	22.00	2
		12	6	20.44	21.00	20.37	22.00	2
		12	13	20.43	20.93	20.37	22.00	2
		25	0	20.39	21.10	20.40	22.00	2
		1	0	20.37	21.12	20.44	22.00	2
		1	12	20.39	21.03	20.49	22.00	2
		1	24	20.36	21.00	20.48	22.00	2
5	64-QAM	12	0	19.54	19.96	19.38	21.00	3
		12	6	19.47	19.98	19.51	21.00	3
		12	13	19.43	20.12	19.48	21.00	3
		25	0	19.40	20.13	19.49	21.00	3

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 101 of 255

			LTE	Band 66				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	(dBm)	Target Power +	MDD
	Frequenc		1711.5	1745	1778.5	Max. Tolerance	Allowed per	
	Channel				132322	132657	(dBm)	MPR Allowed per 3GPP(dB) 0 0 0 1 1 1 1 1 1 2 2 2 2 2 2 2 2 3 3 3 3 3
		1	0	22.49	22.95	22.55	24.00	0
		1	7	22.55	23.07	22.38	24.00	0
		1	14	22.37	22.95	22.51	24.00	0
3	QPSK	8	0	21.52	21.97	21.38	23.00	1
		8	4	21.40	22.05	21.42	23.00	1
		8	7	21.52	22.06	21.36	23.00	1
		15	0	21.38	22.07	21.36	23.00	1
		1	0	21.44	22.10	21.40	23.00	1
		1	7	21.51	22.00	21.45	23.00	1
		1	14	21.39	22.12	21.45	23.00	1
3	16-QAM	8	0	20.41	20.98	20.52	22.00	2
		8	4	20.44	20.99	20.48	22.00	2
		8	7	20.48	21.12	20.42	22.00	2
		15	0	20.42	21.04	20.54	22.00	2
		1	0	20.48	20.99	20.35	22.00	2
		1	7	20.45	21.06	20.49	22.00	2
		1	14	20.42	20.98	20.44	22.00	2
3	64-QAM	8	0	19.47	19.98	19.43	21.00	3
		8	4	19.36	19.96	19.48	21.00	3
		8	7	19.47	20.10	19.48	21.00	3
		15	0	19.40	19.96	19.42	21.00	3

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 102 of 255

			LTE	Band 66					
BW(MHz)	Modulation	RB Size	RB Offset	Conducted power (dBm) Target Power +					
	Frequenc		1710.7	1745	1779.3	Max. Tolerance	Allowed per		
	Channel				132322	132665	(dBm)	MPR Allowed per 3GPP(dB) 0 0 0 0 0 1 1 1 1 1 1 2 2 2 2 2 2 2 2	
		1	0	22.38	23.05	22.35	24.00	0	
		1	2	22.45	23.08	22.45	24.00	0	
		1	5	22.50	23.05	22.37	24.00	0	
1.4	QPSK	3	0	22.36	22.94	22.38	24.00	0	
		3	2	22.46	23.11	22.41	24.00	0	
		3	3	22.45	23.12	22.48	24.00	0	
		6	0	21.44	21.97	21.48	23.00	1	
		1	0	21.47	22.01	21.43	23.00	1	
		1	2	21.46	21.98	21.52	23.00	1	
		1	5	21.54	22.04	21.46	23.00	1	
1.4	16-QAM	3	0	21.39	21.99	21.49	23.00	1	
		3	2	21.49	22.00	21.37	23.00	1	
		3	3	21.44	22.06	21.44	23.00	1	
		6	0	20.38	21.10	20.52	22.00	2	
		1	0	20.45	20.99	20.50	22.00	2	
		1	2	20.52	21.08	20.40	22.00	2	
		1	5	20.53	21.10	20.38	22.00	2	
1.4	64-QAM	3	0	20.48	21.12	20.50	22.00	2	
		3	2	20.47	21.12	20.41	22.00	2	
		3	3	20.50	21.10	20.37	22.00	2	
[6	0	19.40	20.09	19.49	21.00	3	

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 103 of 255

sensor on

			LTE	Band 2				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	(dBm)	Target	MDD
	Frequenc	cy (MHz)		1860	1880	1900	Power + Max. Tolerance	MPR Allowed per
	Channel				18900	19100	(dBm)	JOFF(UD)
		1	0	12.46	12.66	12.64	13.50	0
		1	50	12.42	12.53	12.48	13.50	0
		1	99	12.46	12.48	12.46	13.50	0
20	QPSK	50	0	12.50	12.54	12.46	13.50	0
		50	25	12.53	12.47	12.41	13.50	0
		50	50	12.49	12.46	12.52	13.50	0
		100	0	12.51	12.46	12.46	13.50	0
		1	0	12.36	12.37	12.52	13.50	0
		1	50	12.45	12.39	12.44	13.50	0
		1	99	12.45	12.51	12.40	13.50	0
20	16-QAM	50	0	12.39	12.52	12.50	13.50	0
		50	25	12.53	12.37	12.37	13.50	0
		50	50	12.46	12.52	12.39	13.50	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
		100	0	12.46	12.44	12.50	13.50	0
		1	0	12.48	12.36	12.51	13.50	0
		1	50	12.41	12.43	12.41	13.50	0
		1	99	12.44	12.53	12.35	13.50	0
20	64-QAM	50	0	12.40	12.38	12.49	13.50	0
		50	25	12.35	12.43	12.37	13.50	0
		50	50	12.49	12.52	12.38	13.50	0
		100	0	12.40	12.46	12.49	13.50	0



Page: 104 of 255

			LTE	Band 2				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	Target Power +	MDD	
	Frequenc	1857.5	1880	1902.5	Max. Tolerance	Allowed per		
	Channel				18900	19125	(dBm)	3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
		1	0	12.43	12.53	12.49	13.50	0
		1	36	12.48	12.38	12.43	13.50	0
		1	74	12.48	12.42	12.35	13.50	0
15	QPSK	36	0	12.41	12.43	12.51	13.50	0
		36	18	12.37	12.47	12.37	13.50	0
		36	37	12.51	12.53	12.49	13.50	0
		75	0	12.50	12.43	12.54	13.50	0
		1	0	12.51	12.36	12.54	13.50	0
		1	36	12.40	12.45	12.41	13.50	0
		1	74	12.43	12.43	12.44	13.50	0
15	16-QAM	36	0	12.42	12.36	12.42	13.50	0
		36	18	12.43	12.50	12.43	13.50	0
		36	37	12.54	12.44	12.48	13.50	0
		75	0	12.42	12.47	12.36	13.50	0
		1	0	12.37	12.45	12.55	13.50	0
		1	36	12.38	12.52	12.39	13.50	0
		1	74	12.53	12.51	12.38	13.50	0
15	64-QAM	36	0	12.48	12.51	12.39	13.50	0
		36	18	12.41	12.40	12.38	13.50	0
		36	37	12.48	12.50	12.41	13.50	0 0 0 0 0 0 0 0 0 0 0
		75	0	12.52	12.39	12.55	13.50	0



Page: 105 of 255

			LTE	Band 2					
BW(MHz)	Modulation	RB Size	RB Offset	Conducted power (dBm) Target Power + N					
	Frequenc		1855	1880	1905	Max. Tolerance	Allowed per		
	Channel				18900	19150	(dBm)	3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	
		1	0	12.45	12.46	12.52	13.50	0	
		1	25	12.41	12.48	12.38	13.50	0	
		1	49	12.41	12.42	12.39	13.50	0	
10	QPSK	25	0	12.50	12.50	12.46	13.50	0	
		25	12	12.43	12.40	12.41	13.50	0	
		25	25	12.35	12.52	12.37	13.50	0	
		50	0	12.35	12.52	12.37	13.50	0	
		1	0	12.49	12.52	12.43	13.50	0	
		1	25	12.37	12.40	12.38	13.50	0	
		1	49	12.45	12.36	12.53	13.50	0	
10	16-QAM	25	0	12.43	12.43	12.36	13.50	0	
		25	12	12.52	12.52	12.39	13.50	0	
		25	25	12.37	12.48	12.37	13.50	0	
		50	0	12.51	12.40	12.42	13.50	0	
		1	0	12.49	12.43	12.43	13.50	0	
		1	25	12.39	12.47	12.42	13.50	0	
		1	49	12.52	12.49	12.48	13.50	0	
10	64-QAM	25	0	12.42	12.38	12.38	13.50	0	
		25	12	12.44	12.35	12.41	13.50	0	
		25	25	12.53	12.45	12.54	13.50	0	
L		50	0	12.51	12.39	12.54	13.50	0	



Page: 106 of 255

			LTE	Band 2				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	(dBm)	Target Power +	MDD
	Frequenc		1852.5	1880	1907.5	Max. Tolerance	Allowed per	
	Channel				18900	19175	(dBm)	+ MPR Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
		1	0	12.48	12.39	12.48	13.50	0
		1	12	12.49	12.36	12.39	13.50	0
		1	24	12.35	12.50	12.55	13.50	0
5	QPSK	12	0	12.46	12.47	12.45	13.50	0
		12	6	12.42	12.36	12.51	13.50	0
		12	13	12.49	12.45	12.47	13.50	0
		25	0	12.53	12.54	12.45	13.50	0
		1	0	12.50	12.44	12.37	13.50	0
		1	12	12.52	12.38	12.43	13.50	0
		1	24	12.55	12.52	12.38	13.50	0
5	16-QAM	12	0	12.54	12.45	12.53	13.50	0
		12	6	12.48	12.40	12.52	13.50	0
		12	13	12.49	12.39	12.40	13.50	0
		25	0	12.55	12.54	12.44	13.50	0
		1	0	12.42	12.53	12.52	13.50	0
		1	12	12.44	12.54	12.35	13.50	0
		1	24	12.48	12.42	12.37	13.50	0
5	64-QAM	12	0	12.49	12.42	12.51	13.50	0
		12	6	12.46	12.55	12.36	13.50	0
		12	13	12.51	12.46	12.54	13.50	0
		25	0	12.43	12.45	12.50	13.50	0

台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279

f (886-2) 2298-0488



Page: 107 of 255

			LTE	Band 2				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	Target Power +	MDD		
	Frequenc	1851.5	1880	1908.5	Max. Tolerance	Allowed per		
	Channel				18900	19185	(dBm)	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
		1	0	12.50	12.55	12.50	13.50	0
		1	7	12.39	12.37	12.53	13.50	0
		1	14	12.54	12.45	12.47	13.50	0
3	QPSK	8	0	12.40	12.43	12.53	13.50	0
		8	4	12.42	12.41	12.49	13.50	0
		8	7	12.47	12.52	12.48	13.50	0
		15	0	12.50	12.51	12.46	13.50	0
		1	0	12.46	12.52	12.41	13.50	0
		1	7	12.46	12.50	12.42	13.50	0
		1	14	12.47	12.50	12.53	13.50	0
3	16-QAM	8	0	12.45	12.35	12.45	13.50	0
		8	4	12.48	12.36	12.36	13.50	0
		8	7	12.46	12.49	12.43	13.50	0
		15	0	12.43	12.40	12.52	13.50	0
		1	0	12.40	12.40	12.46	13.50	0
		1	7	12.47	12.50	12.40	13.50	0
		1	14	12.42	12.47	12.44	13.50	0
3	64-QAM	8	0	12.38	12.51	12.43	13.50	0
		8	4	12.37	12.52	12.41	13.50	0
		8	7	12.40	12.51	12.44	13.50	0 0 0 0 0 0 0
		15	0	12.50	12.41	12.37	13.50	0

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 108 of 255

			1.75	D 10				
			LIE	Band 2				
BW(MHz)	Modulation	RB Size	RB Offset	Conducted power (dBm) Target Power +				
	Frequenc	1850.7	1880	1909.3	Max. Tolerance	Allowed per		
	Channel				18900	19193	(dBm)	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
		1	0	12.53	12.43	12.51	13.50	0
		1	2	12.45	12.50	12.50	13.50	0
		1	5	12.35	12.43	12.51	13.50	0
1.4	QPSK	3	0	12.39	12.42	12.36	13.50	0
		3	2	12.48	12.45	12.36	13.50	0
		3	3	12.39	12.51	12.54	13.50	0
		6	0	12.38	12.44	12.45	13.50	0
		1	0	12.40	12.55	12.42	13.50	0
		1	2	12.36	12.54	12.47	13.50	0
		1	5	12.36	12.53	12.45	13.50	0
1.4	16-QAM	3	0	12.47	12.51	12.49	13.50	0
		3	2	12.36	12.43	12.45	13.50	0
		3	3	12.51	12.36	12.52	13.50	0
		6	0	12.49	12.39	12.54	13.50	0
		1	0	12.49	12.49	12.42	13.50	0
		1	2	12.49	12.36	12.47	13.50	0
		1	5	12.42	12.39	12.40	13.50	0
1.4	64-QAM	3	0	12.52	12.44	12.36	13.50	0
		3	2	12.39	12.36	12.35	13.50	0
		3	3	12.53	12.48	12.51	13.50	0 0 0 0 0
		6	0	12.50	12.49	12.55	13.50	0

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

台灣檢驗科技股份有限公司

f (886-2) 2298-0488



Page: 109 of 255

			LTE	Band 4				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	(dBm)	Target	MDD
	Frequenc	1720	1732.5	1745	Power + Max. Tolerance	Allowed per		
	Channel				20175	20300	(dBm)	3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
		0	13.92	13.89	13.79	14.00	0	
		1	50	13.67	13.60	13.61	14.00	0
		1	99	13.64	13.61	13.76	14.00	0
20	QPSK	50	0	13.75	13.77	13.74	14.00	0
		50	25	13.78	13.68	13.63	14.00	0
		50	50	13.74	13.72	13.74	14.00	0
		100	0	13.63	13.62	13.61	14.00	0
		1	0	13.74	13.72	13.71	14.00	0
		1	50	13.75	13.71	13.78	14.00	0
		1	99	13.78	13.64	13.75	14.00	0
20	16-QAM	50	0	13.76	13.63	13.60	14.00	0
		50	25	13.60	13.79	13.64	14.00	0
		50	50	13.75	13.67	13.70	14.00	0
		100	0	13.61	13.72	13.67	14.00	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
		1	0	13.66	13.61	13.77	14.00	0
		1	50	13.75	13.76	13.61	14.00	0
		1	99	13.65	13.73	13.64	14.00	0
20	64-QAM	50	0	13.64	13.61	13.79	14.00	0
		50	25	13.79	13.64	13.68	14.00	0
		50	50	13.77	13.66	13.74	14.00	Allowed pe 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
		100	0	13.79	13.80	13.69	14.00	0

台灣檢驗科技股份有限公司



Page: 110 of 255

			LTE	Band 4				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	Target Power +	MDD	
	Frequenc		1717.5	1732.5	1747.5	Max. Tolerance	Allowed per	
	Channel				20175	20325	(dBm)	3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
		1	0	13.78	13.71	13.60	14.00	0
		1	36	13.64	13.75	13.73	14.00	0
		1	74	13.67	13.64	13.78	14.00	0
15	QPSK	36	0	13.77	13.78	13.76	14.00	0
		36	18	13.73	13.75	13.76	14.00	0
		36	37	13.72	13.77	13.60	14.00	0
		75	0	13.80	13.63	13.71	14.00	0
		1	0	13.76	13.79	13.61	14.00	0
		1	36	13.78	13.72	13.77	14.00	0
		1	74	13.65	13.71	13.68	14.00	0
15	16-QAM	36	0	13.68	13.61	13.76	14.00	0
		36	18	13.69	13.69	13.77	14.00	0
		36	37	13.78	13.66	13.75	14.00	0
		75	0	13.74	13.64	13.65	14.00	0
		1	0	13.72	13.66	13.62	14.00	0
		1	36	13.73	13.68	13.80	14.00	0
		1	74	13.75	13.64	13.79	14.00	0
15	64-QAM	36	0	13.66	13.60	13.61	14.00	0
		36 18 13.76 13.	13.68	13.76	14.00	0		
		36	37	13.63	13.62	13.65	14.00	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
		75	0	13.77	13.68	13.64	14.00	0

t (886-2) 2299-3279

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

f (886-2) 2298-0488



Page: 111 of 255

			LTE	Band 4				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	Target Power +	MDD	
	Frequenc		1715	1732.5	1750	Max. Tolerance	Allowed per	
	Channel				20175	20350	(dBm)	3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
		1	0	13.73	13.80	13.73	14.00	0
		1	25	13.61	13.62	13.74	14.00	0
		1	49	13.72	13.61	13.66	14.00	0
10	QPSK	25	0	13.78	13.78	13.77	14.00	0
		25	12	13.78	13.68	13.66	14.00	0
		25	25	13.68	13.67	13.74	14.00	0
		50	0	13.74	13.76 13.77	13.62	14.00	0
		1	0	13.63	13.77	13.61	14.00	0
		1	25	13.63	13.76	13.74	14.00	0
		1	49	13.75	13.72	13.77	14.00	0
10	16-QAM	25	0	13.61	13.75	13.60	14.00	0
		25	12	13.61	13.74	13.77	14.00	0
		25	25	13.70	13.72	13.72	14.00	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
		50	0	13.76	13.77	13.71	14.00	0
		1	0	13.62	13.60	13.65	14.00	0
		1	25	13.73	13.63	13.79	14.00	0
		1	49	13.62	13.80	13.73	14.00	0
10	64-QAM	25	0	13.73	13.74	13.69	14.00	0
		25	12	13.70	13.66	13.74	14.00	0
		25	25	13.62	13.75	13.75	14.00	Allowed pe 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
<u> </u>		50	0	13.74	13.65	13.69	14.00	0



Page: 112 of 255

			LTE	Band 4				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	Target Power +	MPR	
	Frequenc		1712.5	1732.5	1752.5	Max. Tolerance	Allowed per 3GPP(dB)	
	Channel				20175	20375	(dBm)	JOFF(UD)
		1	0	13.69	13.67	13.74	14.00	0
1 1		1	12	13.60	13.73	13.79	14.00	0
		1	24	13.63	13.64	13.77	14.00	0
5	QPSK	12	0	13.68	13.77	13.63	14.00	0
		12	6	13.67	13.77	13.71	14.00	0
		12	13	13.80	13.67	13.63	14.00	0
		25	0	13.62	13.67	13.61	14.00	0
		1	0	13.79	13.66	13.76	14.00	0
		1	12	13.68	13.66	13.68	14.00	0
		1	24	13.75	13.78	13.78	14.00	0
5	16-QAM	12	0	13.61	13.79	13.65	14.00	0
		12	6	13.72	13.76	13.79	14.00	0
		12	13	13.61	13.77	13.70	14.00	0
		25	0	13.78	13.65	13.75	14.00	0
		1	0	13.67	13.62	13.70	14.00	0
1		1	12	13.76	13.65	13.77	14.00	0
1 1		1	24	13.62	13.67	13.78	14.00	0
5	64-QAM	12	0	13.69	13.70	13.66	14.00	0
		12	6	13.71	13.70	13.72	14.00	0
		12	13	13.78	13.68	13.68	14.00	0
			0	13.66	13.76	13.63	14.00	0

t (886-2) 2299-3279

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

f (886-2) 2298-0488



Page: 113 of 255

			LTE	Band 4				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	Target Power +	MPR	
	Frequenc	1711.5	1732.5	1753.5	Max. Tolerance	Allowed per 3GPP(dB)		
	Channel				20175	20385	(dBm)	JOIT (UD)
		1	0	13.68	13.65	13.76	14.00	0
		1	7	13.63	13.65	13.69	14.00	0
		1	14	13.70	13.61	13.66	14.00	0
3	QPSK	8	0	13.74	13.76	13.61	14.00	0
		8	4	13.71	13.79	13.68	14.00	0
		8	7	13.72	13.63	13.64	14.00	0
		15	0	13.67	13.70	13.60	14.00	0
		1	0	13.63	13.74	13.70	14.00	0
		1	7	13.71	13.76	13.79	14.00	0
		1	14	13.74	13.79	13.67	14.00	0
3	16-QAM	8	0	13.79	13.63	13.73	14.00	0
		8	4	13.76	13.76	13.76	14.00	0
		8	7	13.75	13.62	13.61	14.00	0
		15	0	13.66	13.78	13.62	14.00	0
		1	0	13.60	13.67	13.63	14.00	0
		1	7	13.70	13.68	13.78	14.00	0
[1	14	13.67	13.76	13.76	14.00	0
3	64-QAM	8	0	13.73	13.67	13.64	14.00	0
		8	4	13.75	13.68	13.62	14.00	0
		8	7	13.72	13.66	13.76	14.00	0
		15	0	13.69	13.78	13.66	14.00	0

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279

f (886-2) 2298-0488



Page: 114 of 255

			LTE	Band 4				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	MPR			
	Frequenc		1710.7	1732.5	1754.3	Power + Max. Tolerance	Allowed per 3GPP(dB)	
	Channel				20175	20393	(dBm)	OCIT (GB)
		0	13.64	13.77	13.77	14.00	0	
		1	2	13.68	13.80	13.77	14.00	0
		1	5	13.71	13.74	13.60	14.00	0
1.4	QPSK	3	0	13.75	13.65	13.70	14.00	0
		3	2	13.60	13.69	13.74	14.00	0
		3	3	13.76	13.71	13.63	14.00	0
		6	0	13.68	13.75	13.73	14.00	0
		1	0	13.72	13.60	13.65	14.00	0
		1	2	13.76	13.61	13.69	14.00	0
		1	5	13.64	13.72	13.61	14.00	0
1.4	16-QAM	3	0	13.63	13.65	13.71	14.00	0
		3	2	13.67	13.77	13.77	14.00	0
		3	3	13.62	13.68	13.76	14.00	0
		6	0	13.66	13.72	13.68	14.00	0
		1	0	13.67	13.61	13.65	14.00	0
		1	2	13.78	13.71	13.64	14.00	0
		1	5	13.61	13.73	13.68	14.00	0
1.4	64-QAM	3	0	13.62	13.78	13.77	14.00	0
		3	2	13.63	13.66	13.70	14.00	0
		3	3	13.66	13.60	13.74	14.00	0
		6	0	13.61	13.77	13.76	14.00	0



Page: 115 of 255

			LTE	Band 5				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	Target Power +	MPR		
	Frequenc		829	836.5	844	Max. Tolerance	Allowed per 3GPP(dB)	
	Channel				20525	20600	(dBm)	OOI I (ub)
		1	0	19.44	19.39	19.38	20.00	0
		1	25	19.29	19.19	19.36	20.00	0
		1	49	19.26	19.31	19.30	20.00	0
10	QPSK	25	0	19.27	19.25	19.23	20.00	0
		25	12	19.34	19.26	19.35	20.00	0
		25	25	19.31	19.27	19.29	20.00	0
		50	0	19.26	19.28	19.16	20.00	0
		1	0	19.18	19.34	19.30	20.00	0
		1	25	19.20	19.18	19.20	20.00	0
		1	49	19.22	19.35	19.19	20.00	0
10	16-QAM	25	0	19.28	19.33	19.31	20.00	0
		25	12	19.24	19.24	19.33	20.00	0
		25	25	19.32	19.33	19.35	20.00	0
		50	0	19.17	19.25	19.25	20.00	0
		1	0	19.20	19.28	19.34	20.00	0
		1	25	19.27	19.17	19.27	20.00	0
		1	49	19.28	19.19	19.34	20.00	0
10	64-QAM	25	0	19.17	19.34	19.21	20.00	0
		25	12	19.20	19.20	19.18	20.00	0
		25	25	19.16	19.20	19.32	20.00	0 0 0 0 0 0 0 0 0 0 0 0 0 0
		50	0	19.25	19.28	19.18	20.00	0

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 116 of 255

			LTE	Band 5				
BW(MHz)	Modulation	RB Size	RB Offset	Conducted power (dBm) Target Power + M				
	Frequenc		826.5	836.5	846.5	Max. Tolerance	MPR Allowed per 3GPP(dB)	
	Channel				20525	20625	(dBm)	JOFF(UD)
		1	0	19.21	19.26	19.18	20.00	0
		1	12	19.17	19.32	19.24	20.00	0
		1	24	19.31	19.18	19.30	20.00	0
5	QPSK	12	0	19.24	19.35	19.29	20.00	0
		12	6	19.27	19.33	19.22	20.00	0
		12	13	19.34	19.27	19.33	20.00	0
		25	0	19.34	19.30	19.17	20.00	0
		1	0	19.30	19.26	19.35	20.00	0
		1	12	19.32	19.31	19.28	20.00	0
		1	24	19.18	19.27	19.19	20.00	0
5	16-QAM	12	0	19.24	19.21	19.23	20.00	0
		12	6	19.35	19.27	19.22	20.00	0
		12	13	19.25	19.29	19.26	20.00	0
		25	0	19.34	19.25	19.30	20.00	0
		1	0	19.30	19.33	19.35	20.00	0
		1	12	19.26	19.33	19.26	20.00	0
		1	24	19.16	19.27	19.33	20.00	0
5	64-QAM	12	0	19.17	19.16	19.18	20.00	0
		12	6	19.36	19.24	19.26	20.00	0
		12	13	19.17	19.27	19.16	20.00	0
			0	19.35	19.19	19.31	20.00	0



Page: 117 of 255

			LTE	Band 5				
BW(MHz)	Modulation	RB Size	RB Offset	Conducted power (dBm) Target Power + M				
	Frequenc		825.5	836.5	847.5	Max. Tolerance	MPR Allowed per 3GPP(dB)	
	Channel				20525	20635	(dBm)	JOH I (db)
		1	0	19.25	19.27	19.28	20.00	0
1 1		1	7	19.30	19.34	19.33	20.00	0
		1	14	19.30	19.21	19.33	20.00	0
3	QPSK	8	0	19.19	19.36	19.21	20.00	0
		8	4	19.17	19.19	19.34	20.00	0
		8	7	19.27	19.27	19.28	20.00	0
		15	0	19.36	19.20	19.34	20.00	0
		1	0	19.19	19.23	19.20	20.00	0
		1	7	19.17	19.29	19.23	20.00	0
		1	14	19.22	19.19	19.28	20.00	0
3	16-QAM	8	0	19.32	19.26	19.36	20.00	0
		8	4	19.34	19.34	19.24	20.00	0
		8	7	19.27	19.31	19.18	20.00	0
		15	0	19.17	19.21	19.32	20.00	0
		1	0	19.30	19.29	19.31	20.00	0
1		1	7	19.35	19.35	19.25	20.00	0
		1	14	19.26	19.33	19.18	20.00	0
3	64-QAM	8	0	19.19	19.34	19.32	20.00	0
1		8	4	19.28	19.34	19.16	20.00	0
		8	7	19.30	19.26	19.35	20.00	0
			0	19.29	19.18	19.17	20.00	0

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

台灣檢驗科技股份有限公司

f (886-2) 2298-0488



Page: 118 of 255

			LTE	Band 5				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	Target Power +	MDD		
	Frequenc		824.7	836.5	848.3	Max. Tolerance	Allowed per	
	Channel				20525	20643	(dBm)	MPR Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
		1	0	19.31	19.33	19.17	20.00	0
1 1		1	2	19.19	19.24	19.23	20.00	0
		1	5	19.28	19.27	19.31	20.00	0
1.4	QPSK	3	0	19.29	19.18	19.24	20.00	0
		3	2	19.24	19.30	19.26	20.00	0
		3	3	19.28	19.19	19.19	20.00	0
		6	0	19.30	19.17	19.26	20.00	0
		1	0	19.31	19.17	19.24	20.00	0
		1	2	19.30	19.26	19.25	20.00	0
		1	5	19.26	19.19	19.29	20.00	0
1.4	16-QAM	3	0	19.36	19.27	19.19	20.00	0
		3	2	19.21	19.20	19.20	20.00	0
		3	3	19.32	19.36	19.28	20.00	Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
		6	0	19.26	19.25	19.32	20.00	0
		1	0	19.32	19.26	19.20	20.00	0
1		1	2	19.32	19.24	19.20	20.00	0
		1	5	19.22	19.28	19.26	20.00	0
1.4	64-QAM	3	0	19.17	19.22	19.24	20.00	0
1 1		3	2	19.34	19.22	19.28	20.00	0
		3	3	19.20	19.25	19.26	20.00	0
		6	0	19.26	19.22	19.32	20.00	0

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 119 of 255

			LTE	Band 7				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	(dBm)	Target Power +	MPR
	Frequenc		2510	2535	2560	Max. Tolerance	Allowed per 3GPP(dB)	
	Channel				21100	21350	(dBm)	OOI I (GD)
		0	13.75	13.66	13.63	14.50	0	
		1	50	13.50	13.55	13.43	14.50	0
		1	99	13.54	13.48	13.48	14.50	0
20	QPSK	50	0	13.40	13.54	13.45	14.50	0
		50	25	13.55	13.59	13.50	14.50	0
		50	50	13.57	13.59	13.42	14.50	0
		100	0	13.43	13.51	13.54	14.50	0
		1	0	13.57	13.56	13.54	14.50	0
		1	50	13.51	13.43	13.59	14.50	0
		1	99	13.51	13.42	13.40	14.50	0
20	16-QAM	50	0	13.42	13.40	13.51	14.50	0
		50	25	13.53	13.54	13.59	14.50	0
		50	50	13.50	13.54	13.52	14.50	0
		100	0	13.57	13.50	13.50	14.50	0
		1	0	13.43	13.50	13.40	14.50	0
		1	50	13.46	13.42	13.40	14.50	0
		1	99	13.45	13.59	13.56	14.50	0
20	64-QAM	50	0	13.60	13.51	13.46	14.50	0
		50	25	13.58	13.48	13.47	14.50	0
		50	50	13.58	13.43	13.51	14.50	0 0 0 0 0 0 0 0 0 0 0
		100	0	13.49	13.51	13.52	14.50	0

台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279 f (886-2) 2298-0488 www.sgs.com.tw



Page: 120 of 255

			LTE	Band 7				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	Target Power +	MPR	
	Frequenc		2507.5	2535	2562.5	Max. Tolerance	Allowed per 3GPP(dB)	
	Channel				21100	21375	(dBm)	JOIT (UD)
		1	0	13.55	13.50	13.44	14.50	0
		1	36	13.48	13.58	13.47	14.50	0
		1	74	13.52	13.58	13.45	14.50	0
15	QPSK	36	0	13.59	13.53	13.45	14.50	0
		36	18	13.50	13.41	13.59	14.50	0
		36	37	13.46	13.42	13.56	14.50	0
		75	0	13.56	13.49	13.45	14.50	0
		1	0	13.56	13.46	13.41	14.50	0
		1	36	13.46	13.48	13.58	14.50	0
		1	74	13.58	13.54	13.49	14.50	0
15	16-QAM	36	0	13.53	13.47	13.53	14.50	0
		36	18	13.55	13.43	13.43	14.50	0
		36	37	13.50	13.52	13.42	14.50	0
		75	0	13.49	13.55	13.49	14.50	0
		1	0	13.54	13.43	13.46	14.50	0
		1	36	13.44	13.50	13.60	14.50	0
		1	74	13.58	13.56	13.42	14.50	0
15	64-QAM	36	0	13.54	13.54	13.44	14.50	0
		36	18 13.54 13.46 13.46	13.46	14.50	0		
		36	37	13.51	13.51	13.43	14.50	0
		75	0	13.46	13.49	13.51	14.50	0

t (886-2) 2299-3279

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

f (886-2) 2298-0488



Page: 121 of 255

			LTE	Band 7				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	lucted power	Target	MDD	
	Frequenc	2505	2535	2565	Power + Max. Tolerance	MPR Allowed per 3GPP(dB)		
	Channel				21100	21400	(dBm)	3011 (db)
		0	13.58	13.57	13.41	14.50	0	
		1	25	13.42	13.40	13.45	14.50	0
		1	49	13.45	13.42	13.45	14.50	0
10	QPSK	25	0	13.47	13.43	13.51	14.50	0
		25	12	13.58	13.52	13.44	14.50	0
		25	25	13.48	13.51	13.55	14.50	0
		50	0	13.50	13.45	13.55	14.50	0
		1	0	13.51	13.57	13.53	14.50	0
		1	25	13.54	13.42	13.53	14.50	0
		1	49	13.41	13.50	13.56	14.50	0
10	16-QAM	25	0	13.48	13.56	13.59	14.50	0
		25	12	13.44	13.48	13.49	14.50	0
		25	25	13.42	13.55	13.43	14.50	0
		50	0	13.49	13.49	13.49	14.50	0
		1	0	13.40	13.41	13.41	14.50	0
		1	25	13.47	13.41	13.56	14.50	0
		1	49	13.53	13.43	13.55	14.50	0
10	64-QAM	25	0	13.46	13.58	13.45	14.50	0
		25	12	13.55	13.40	13.41	14.50	0
		25	25 25 13.51 13	13.44	13.52	14.50	0	
		50	0	13.53	13.46	13.48	14.50	0

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 122 of 255

			LTE	Band 7				
BW(MHz)	Modulation	RB Size	RB Offset	Conducted power (dBm) Target Power +				
	Frequenc	2502.5	2535	2567.5	Max. Tolerance	MPR Allowed per 3GPP(dB)		
	Channel				21100	21425	(dBm)	OOI I (db)
		1	0	13.56	13.56	13.41	14.50	0
1 1		1	12	13.50	13.56	13.47	14.50	0
		1	24	13.45	13.55	13.58	14.50	0
5	QPSK	12	0	13.48	13.56	13.40	14.50	0
		12	6	13.44	13.52	13.50	14.50	0
		12	13	13.48	13.58	13.55	14.50	0
		25	0	13.52	13.42	13.59	14.50	0
		1	0	13.48	13.58	13.41	14.50	0
		1	12	13.51	13.45	13.47	14.50	0
		1	24	13.46	13.57	13.56	14.50	0
5	16-QAM	12	0	13.45	13.44	13.53	14.50	0
		12	6	13.43	13.42	13.56	14.50	0
		12	13	13.49	13.42	13.52	14.50	0
		25	0	13.48	13.56	13.46	14.50	0
		1	0	13.46	13.55	13.50	14.50	0
1		1	12	13.56	13.45	13.49	14.50	0
		1	24	13.56	13.47	13.58	14.50	0
5	64-QAM	12	0	13.42	13.41	13.40	14.50	0
[12	6	13.56	13.52	13.59	14.50	0
		12	13	13.42	13.51	13.44	14.50	0
		25	0	13.57	13.52	13.54	14.50	0

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 123 of 255

			LTE	Band 12				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	Target Power +	MPR		
	Frequenc		704	707.5	711	Max. Tolerance	Allowed per 3GPP(dB)	
	Channel				23095	23130	(dBm)	JOH (GD)
		1	0	21.44	21.33	21.34	21.50	0
		1	25	21.18	21.12	21.13	21.50	0
		1	49	21.13	21.11	21.29	21.50	0
10	QPSK	25	0	21.20	21.21	21.16	21.50	0
		25	12	21.22	21.12	21.30	21.50	0
		25	25	21.13	21.23	21.19	21.50	0
		50	0	21.27	21.27	21.25	21.50	0
		1	0	21.20	21.16	21.15	21.50	0
		1	25	21.29	21.19	21.15	21.50	0
		1	49	21.24	21.28	21.17	21.50	0
10	16-QAM	25	0	21.13	21.12	21.22	21.50	0
		25	12	21.19	21.21	21.13	21.50	0
		25	25	21.12	21.15	21.29	21.50	0
		50	0	21.26	21.20	21.28	21.50	0
		1	0	21.12	21.28	21.24	21.50	0
		1	25	21.10	21.26	21.24	21.50	0
		1	49	21.26	21.27	21.19	21.50	0
10	64-QAM	25	0	21.21	21.26	21.12	21.50	0
		25	12	21.12	21.14	21.17	21.50	0
		25	25	21.11	21.24	21.23	21.50	0 0 0 0 0 0 0 0 0 0
		50	0	21.12	21.18	21.16	21.50	0



Page: 124 of 255

			LTE	Band 12				
BW(MHz)	Modulation	RB Size	RB Offset	Conducted power (dBm) Target Power +				
	Frequenc		701.5	707.5	713.5	Max. Tolerance	MPR Allowed per 3GPP(dB)	
	Channel				23095	23155	(dBm)	JOI 1 (UD)
		1	0	21.14	21.19	21.19	21.50	0
		1	12	21.17	21.15	21.15	21.50	0
		1	24	21.22	21.20	21.11	21.50	0
5	QPSK	12	0	21.28	21.20	21.16	21.50	0
		12	6	21.19	21.26	21.20	21.50	0
		12	13	21.19	21.27	21.11	21.50	0
		25	0	21.22	21.14	21.23	21.50	0
		1	0	21.27	21.17	21.14	21.50	0
		1	12	21.17	21.15	21.25	21.50	0
		1	24	21.10	21.13	21.28	21.50	0
5	16-QAM	12	0	21.12	21.27	21.18	21.50	0
		12	6	21.14	21.18	21.27	21.50	0
		12	13	21.14	21.13	21.13	21.50	0
		25	0	21.29	21.24	21.27	21.50	0
		1	0	21.25	21.20	21.25	21.50	0
1		1	12	21.27	21.21	21.27	21.50	0
		1	24	21.29	21.22	21.28	21.50	0
5	64-QAM	12	0	21.13	21.27	21.23	21.50	0
[12	6	21.24	21.13	21.12	21.50	0
		12	13	21.27	21.14	21.19	21.50	0
		25	0	21.18	21.17	21.11	21.50	0



Page: 125 of 255

			LTE	Band 12				
BW(MHz)	Modulation	RB Size	RB Offset	Conducted power (dBm) Target Power +				
	Frequenc		700.5	707.5	714.5	Max. Tolerance	MPR Allowed per 3GPP(dB)	
	Channel				23095	23165	(dBm)	JOIT (UD)
		1	0	21.25	21.18	21.12	21.50	0
		1	7	21.27	21.16	21.17	21.50	0
		1	14	21.19	21.12	21.13	21.50	0
3	QPSK	8	0	21.29	21.18	21.19	21.50	0
		8	4	21.25	21.27	21.15	21.50	0
		8	7	21.19	21.22	21.19	21.50	0
		15	0	21.21	21.21	21.12	21.50	0
		1	0	21.11	21.16	21.15	21.50	0
		1	7	21.12	21.24	21.25	21.50	0
		1	14	21.13	21.16	21.19	21.50	0
3	16-QAM	8	0	21.15	21.25	21.12	21.50	0
		8	4	21.15	21.22	21.25	21.50	0
		8	7	21.21	21.22	21.23	21.50	0
		15	0	21.10	21.16	21.26	21.50	0
		1	0	21.15	21.21	21.25	21.50	0
1 1		1	7	21.30	21.20	21.22	21.50	0
1		1	14	21.21	21.20	21.24	21.50	0
3	64-QAM	8	0	21.10	21.11	21.11	21.50	0
1 1		8	4	21.27	21.14	21.19	21.50	0
		8	7	21.16	21.24	21.14	21.50	0
		15	0	21.23	21.26	21.29	21.50	0

t (886-2) 2299-3279

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

f (886-2) 2298-0488



Page: 126 of 255

			LTE	Band 12				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	(dBm)	Target Power +	MDD
	Frequenc	cy (MHz)		699.7	707.5	715.3	Max. Tolerance	Allowed per
	Channel				23095	23173	(dBm)	3011 (db)
		1	0	21.17	21.16	21.20	21.50	0
1 1		1	2	21.17	21.13	21.27	21.50	0
		1	5	21.29	21.12	21.12	21.50	0
1.4	QPSK	3	0	21.26	21.11	21.12	21.50	0
		3	2	21.21	21.25	21.13	21.50	0
		3	3	21.12	21.12	21.17	21.50	0
		6	0	21.11	21.11	21.19	21.50	0
		1	0	21.28	21.27	21.26	21.50	0
		1	2	21.15	21.13	21.20	21.50	0
		1	5	21.13	21.25	21.19	21.50	0
1.4	16-QAM	3	0	21.10	21.19	21.19	21.50	0
		3	2	21.12	21.17	21.14	21.50	0
		3	3	21.27	21.26	21.29	21.50	0
		6	0	21.30	21.30	21.14	21.50	0
		1	0	21.29	21.18	21.16	21.50	0
1 1		1	2	21.24	21.27	21.15	21.50	0
		1	5	21.13	21.22	21.20	21.50	0
1.4	64-QAM	3	0	21.19	21.17	21.26	21.50	0
1		3	2	21.15	21.22	21.22	21.50	0
		3	3	21.19	21.28	21.30	21.50	3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
		6	0	21.19	21.23	21.14	21.50	0

t (886-2) 2299-3279

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

f (886-2) 2298-0488



Page: 127 of 255

			LTEI	Band 13				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ducted power (dBm)	Target	
	Frequenc		-	782	-	Power + Max. Tolerance	MPR Allowed per 3GPP(dB)	
	Channel					(dBm)	SGPP(dB)	
		1	0		21.50		21.50	0
		1	25		21.44		21.50	0
		1	49		21.39		21.50	0
10	QPSK	25	0		21.43		21.50	0
		25	12		21.33		21.50	0
		25	25		21.31		21.50	0
		50	0		21.27		21.50	0
		1	0		21.40		21.50	0
		1	25		21.32		21.50	0
		1	49		21.41		21.50	0
10	16-QAM	25	0		21.26		21.50	0
		25	12		21.30		21.50	0
		25	25		21.32		21.50	0 0 0 0
		50	0		21.35		21.50	0
		1	0		21.31		21.50	0
		1	25		21.26		21.50	0
		1	49		21.32		21.50	0
10	64-QAM	25	0		21.44		21.50	0
		25	12		21.45		21.50	0
		25	25		21.33		21.50	0
		50	0		21.44	· · · · · · · · · · · · · · · · · · ·	21.50	0



Page: 128 of 255

			LTE	Band 13					
BW(MHz)	Modulation	RB Size	RB Offset	Cond	Conducted power (dBm) Target				
	Frequenc		779.5	782	784.5	Power + Max. Tolerance	MPR Allowed per 3GPP(dB)		
	Channel				23230	23255	(dBm)	3311 (db)	
		1	0	21.26	21.40	21.20	21.50	0	
		1	12	21.30	21.24	21.37	21.50	0	
		1	24	21.34	21.35	21.39	21.50	0	
5	QPSK	12	0	21.33	21.30	21.36	21.50	0	
		12	6	21.23	21.22	21.22	21.50	0	
		12	13	21.30	21.20	21.33	21.50	0	
		25	0	21.29	21.30	21.25	21.50	0	
		1	0	21.32	21.40	21.25	21.50	0	
		1	12	21.31	21.26	21.21	21.50	0	
		1	24	21.39	21.28	21.30	21.50	0	
5	16-QAM	12	0	21.36	21.36	21.27	21.50	0	
		12	6	21.29	21.26	21.24	21.50	0	
		12	13	21.36	21.27	21.32	21.50	0	
		25	0	21.22	21.23	21.24	21.50	0	
		1	0	21.39	21.39	21.34	21.50	0	
		1	12	21.33	21.21	21.22	21.50	0	
		1	24	21.33	21.36	21.20	21.50	0	
5	64-QAM	12	0	21.31	21.22	21.23	21.50	0	
		12	6	21.33	21.29	21.24	21.50	0	
		12	13	21.31	21.38	21.36	21.50	0	
		25	0	21.22	21.33	21.24	21.50	0	



Page: 129 of 255

			LTE	Band 25				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	Target	MDD	
	Frequenc		1860	1882.5	1905	Power + Max. Tolerance	MPR Allowed per 3GPP(dB)	
	Channel				26365	26590	(dBm)	3GPP(UB)
		1	0	13.11	13.15	13.12	14.00	0
		1	50	12.92	12.95	13.00	14.00	0
		1	99	12.99	13.06	12.93	14.00	0
20	QPSK	50	0	13.06	12.92	12.93	14.00	0
		50	25	12.98	13.05	12.94	14.00	0
		50	50	13.06	12.93	12.94	14.00	0
		100	0	12.98	13.02	13.06	14.00	0
		1	0	13.08	13.02	13.04	14.00	0
		1	50	13.06	13.07	13.03	14.00	0
		1	99	12.90	13.01	13.06	14.00	0
20	16-QAM	50	0	12.96	12.91	12.91	14.00	0
		50	25	12.95	12.96	12.96	14.00	0
		50	50	12.92	12.90	13.04	14.00	0
		100	0	13.07	13.08	13.00	14.00	0
		1	0	12.97	12.97	13.05	14.00	0
		1	50	13.02	12.98	12.91	14.00	0
		1	99	13.05	12.91	13.04	14.00	0
20	64-QAM	50	0	12.92	12.94	12.99	14.00	0
		50	25	13.06	12.95	13.08	14.00	0
		50	50	13.05	12.96	13.08	14.00	0
		100	0	12.96	12.90	12.95	14.00	0

t (886-2) 2299-3279

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

f (886-2) 2298-0488



Page: 130 of 255

			LTE	Band 25				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	MPR			
	Frequenc		1857.5	1882.5	1907.5	Power + Max. Tolerance	Allowed per 3GPP(dB)	
	Channel				26365	26615	(dBm)	OOI I (UD)
		1	0	12.92	13.05	13.01	14.00	0
		1	36	12.98	12.97	13.01	14.00	0
		1	74	13.00	13.00	13.06	14.00	0
15	QPSK	36	0	12.94	12.91	12.97	14.00	0
		36	18	12.95	13.02	12.99	14.00	0
		36	37	12.96	12.92	12.95	14.00	0
		75	0	12.90	13.08	12.93	14.00	0
		1	0	13.01	12.95	13.03	14.00	0
		1	36	12.98	12.91	12.97	14.00	0
		1	74	12.97	13.05	12.94	14.00	0
15	16-QAM	36	0	12.97	13.07	12.98	14.00	0
		36	18	13.00	13.05	12.96	14.00	0
		36	37	12.96	13.08	13.07	14.00	0
		75	0	13.07	12.98	13.01	14.00	0
		1	0	12.99	12.95	13.02	14.00	0
		1	36	12.97	12.97	12.96	14.00	0
		1	74	13.09	13.08	12.95	14.00	0
15	64-QAM	36	0	13.04	12.97	12.96	14.00	0
		36	18	13.09	13.10	12.90	14.00	0
		36	37	12.90	13.02	13.05	14.00	0
		75	0	13.03	13.06	13.09	14.00	0

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 131 of 255

			LTE	Band 25				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	(dBm)	Target Power +	MDD
	Frequenc		1855	1882.5	1910	Max. Tolerance	Allowed per	
	Channel				26365	26640	(dBm)	OCI I (db)
		1	0	12.95	12.90	12.95	14.00	0
		1	25	13.07	12.92	12.90	14.00	0
		1	49	13.03	12.90	13.04	14.00	0
10	QPSK	25	0	12.96	13.02	13.04	14.00	0
		25	12	12.94	13.03	13.08	14.00	0
		25	25	13.05	13.05	12.99	14.00	0
		50	0	13.07	13.07	12.95	14.00	0
		1	0	13.02	13.09	12.99	14.00	0
		1	25	12.90	12.97	12.96	14.00	0
		1	49	12.95	13.10	12.90	14.00	0
10	16-QAM	25	0	13.05	12.94	12.99	14.00	0
		25	12	13.07	12.99	12.97	14.00	0
		25	25	13.05	13.10	12.94	14.00	0 0 0 0 0 0 0 0
		50	0	12.91	12.91	12.97	14.00	0
		1	0	13.10	13.00	13.09	14.00	0
		1	25	13.08	12.97	12.91	14.00	0
		1	49	12.97	13.08	12.96	14.00	0
10	64-QAM	25	0	13.01	13.01	12.95	14.00	0
		25	12	13.04	13.01	13.01	14.00	0
		25	25	13.09	12.91	13.09	14.00	0
		50	0	12.96	12.92	12.97	14.00	0

台灣檢驗科技股份有限公司



Page: 132 of 255

			LTE	Band 25				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	(dBm)	Target Power +	MPR
	Frequenc		1852.5	1882.5	1912.5	Max. Tolerance	Allowed per 3GPP(dB)	
	Channel				26365	26665	(dBm)	JOH F (GD)
		1	0	13.06	13.04	12.94	14.00	0
		1	12	12.96	13.06	13.06	14.00	0
		1	24	12.96	13.06	12.92	14.00	0
5	QPSK	12	0	13.03	13.02	12.93	14.00	0
		12	6	13.03	12.93	13.06	14.00	0
		12	13	13.06	13.10	12.99	14.00	0
		25	0	12.92	13.09	12.95	14.00	0
		1	0	13.02	13.01	13.01	14.00	0
		1	12	13.03	12.95	13.03	14.00	0
		1	24	13.03	12.91	12.91	14.00	0
5	16-QAM	12	0	12.92	13.05	12.91	14.00	0
		12	6	13.10	13.00	12.99	14.00	0
		12	13	12.99	12.98	13.03	14.00	0
		25	0	13.05	13.06	12.97	14.00	0
		1	0	13.04	12.93	12.95	14.00	0
		1	12	13.09	12.96	13.05	14.00	0
		1	24	12.96	13.06	12.90	14.00	0
5	64-QAM	12	0	12.97	13.04	13.06	14.00	0
		12	6	13.08	13.03	13.09	14.00	0
		12	13	13.05	12.94	13.05	14.00	0
			0	13.00	12.93	12.94	14.00	0

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 133 of 255

			LTE	Band 25				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	Target Power +	MPR		
	Frequenc		1851.5	1882.5	1913.5	Max. Tolerance	Allowed per 3GPP(dB)	
	Channel				26365	26675	(dBm)	OOI I (ub)
		1	0	13.09	12.97	13.01	14.00	0
		1	7	13.07	12.94	12.96	14.00	0
		1	14	12.91	12.92	12.96	14.00	0
3 QF	QPSK	8	0	13.10	12.93	12.97	14.00	0
		8	4	13.05	13.07	13.01	14.00	0
		8	7	12.97	12.97	13.09	14.00	0
		15	0	12.92	12.93	13.04	14.00	0
		1	0	12.95	13.06	12.95	14.00	0
		1	7	13.09	13.03	12.99	14.00	0
		1	14	12.92	13.08	13.07	14.00	0
3	16-QAM	8	0	13.04	12.91	12.92	14.00	0
		8	4	13.08	12.94	13.10	14.00	0
		8	7	12.90	12.97	12.91	14.00	0
		15	0	12.96	13.06	13.03	14.00	0
		1	0	13.07	12.98	13.07	14.00	0
		1	7	12.94	13.04	12.93	14.00	0
		1	14	12.91	13.06	13.06	14.00	0
3	64-QAM	8	0	13.06	12.95	12.98	14.00	0
		8	4	13.07	13.03	13.10	14.00	0
		8	7	13.04	13.08	12.93	14.00	0
		15	0	13.06	13.09	12.99	14.00	0



Page: 134 of 255

			LTE	Band 25				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	Target Power +	MPR		
	Frequenc	y (MHz)		1850.7	1882.5	1914.3	Max. Tolerance	Allowed per 3GPP(dB)
	Channel				26365	26683	(dBm)	OOI I (ub)
		1	0	12.96	12.95	13.08	14.00	0
		1	2	13.01	12.94	12.99	14.00	0
		1	5	12.92	12.95	13.09	14.00	0
1.4 Q	QPSK	3	0	13.03	12.91	13.05	14.00	0
		3	2	12.98	12.97	13.01	14.00	0
		3	3	12.93	13.09	13.03	14.00	0
		6	0	13.01	13.09	12.97	14.00	0
		1	0	12.95	12.98	13.06	14.00	0
		1	2	13.08	12.98	13.04	14.00	0
		1	5	12.99	12.97	13.06	14.00	0
1.4	16-QAM	3	0	13.05	13.09	13.00	14.00	0
		3	2	13.06	13.06	12.97	14.00	0
		3	3	12.99	12.93	13.06	14.00	0
		6	0	12.93	13.01	12.99	14.00	0
		1	0	13.07	12.95	13.07	14.00	0
		1	2	12.92	13.01	13.08	14.00	0
		1	5	13.04	12.92	12.91	14.00	0
1.4	64-QAM	3	0	12.94	13.01	13.08	14.00	0
		3	2	13.10	12.99	13.00	14.00	0
		3	3	13.09	13.08	12.99	14.00	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
		6	0	13.09	13.09	12.94	14.00	0

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279

f (886-2) 2298-0488



Page: 135 of 255

			LTE Ba	nd 26_FCC				
BW(MHz)	Modulation	RB Size	RB Offset	Conducted power (dBm) Target Power + N				
	Frequenc	y (MHz)		821.5	831.5	841.5	Max. Tolerance	Allowed per
	Channel				26865	26965	(dBm)	3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
		1	0	18.16	18.21	18.15	19.00	0
		1	36	18.08	18.00	17.92	19.00	0
		1	74	18.00	17.95	17.96	19.00	0
15	QPSK	36	0	18.03	18.05	17.99	19.00	0
		36	18	18.04	18.00	17.99	19.00	0
		36	37	17.93	18.00	18.02	19.00	0
		75	0	18.05	18.00	18.06	19.00	0
		1	0	17.93	17.91	17.97	19.00	0
		1	36	17.96	17.95	17.93	19.00	0
		1	74	18.09	18.05	18.05	19.00	0
15	16-QAM	36	0	17.98	17.97	17.91	19.00	0
		36	18	17.91	17.92	17.96	19.00	0
		36	37	17.94	18.02	18.05	19.00	0
		75	0	17.96	18.04	17.95	19.00	0
		1	0	17.98	18.10	18.00	19.00	0
		1	36	17.92	17.99	18.08	19.00	0
		1	74	18.04	17.99	18.08	19.00	0
15	64-QAM	36	0	18.07	18.08	17.91	19.00	0
		36	18	17.99	18.04	17.91	19.00	0
		36	37	17.94	18.07	17.91	19.00	0 0 0 0 0 0 0 0 0 0 0 0 0
		75	0	17.90	18.01	18.07	19.00	0

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 136 of 255

			LTE Ba	nd 26_FCC				
BW(MHz)	Modulation	RB Size	RB Offset	Conducted power (dBm) Target Power +				
	Frequenc	y (MHz)		819	831.5	844	Max. Tolerance	Allowed per
	Channel				26865	26990	(dBm)	MPR Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
		1	0	17.95	17.93	17.91	19.00	0
		1	25	17.91	18.05	18.00	19.00	0
		1	49	18.08	17.92	18.03	19.00	0
10	QPSK	25	0	17.90	17.97	17.92	19.00	0
		25	12	18.04	17.90	18.00	19.00	0
		25	25	17.92	17.98	17.90	19.00	0
		50	0	18.02	17.99	17.98	19.00	0
		1	0	18.03	17.92	18.06	19.00	0
		1	25	17.94	18.00	17.97	19.00	0
		1	49	18.05	18.06	17.97	19.00	0
10	16-QAM	25	0	17.91	17.94	18.00	19.00	0
		25	12	18.04	18.05	18.06	19.00	0
		25	25	18.00	18.04	18.00	19.00	0
		50	0	17.92	18.01	18.05	19.00	0
		1	0	18.08	17.94	18.01	19.00	0
		1	25	18.03	18.01	18.04	19.00	0
		1	49	17.97	18.09	18.08	19.00	0
10	64-QAM	25	0	17.91	18.01	17.97	19.00	0
		25	12	17.92	18.06	17.93	19.00	0
		25	25	18.03	17.99	18.02	19.00	Allowed pe 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
,		50	0	17.99	18.03	18.05	19.00	0

f (886-2) 2298-0488



Page: 137 of 255

			LTE Bai	nd 26_FCC				
BW(MHz)	Modulation	RB Size	RB Offset	Conducted power (dBm) Target Power +				
	Frequenc	y (MHz)		816.5	831.5	846.5	Max. Tolerance	MPR Allowed per 3GPP(dB)
	Channel				26865	27015	(dBm)	3011 (db)
		1	0	17.96	18.05	18.01	19.00	0
1 1		1	12	17.94	18.00	17.99	19.00	0
		1	24	17.98	18.00	18.02	19.00	0
5 QPSK	QPSK	12	0	18.02	17.96	18.04	19.00	0
		12	6	18.06	18.09	18.07	19.00	0
		12	13	17.92	17.90	18.07	19.00	0
		25	0	18.03	17.95	18.05	19.00	0
		1	0	17.99	18.00	18.02	19.00	0
		1	12	18.00	18.07	18.07	19.00	0
		1	24	18.05	17.90	18.05	19.00	0
5	16-QAM	12	0	18.01	18.07	18.02	19.00	0
		12	6	17.93	18.00	17.97	19.00	0
		12	13	18.03	18.10	17.94	19.00	0
		25	0	17.90	18.05	18.09	19.00	0
		1	0	17.91	17.90	18.03	19.00	0
1		1	12	18.10	18.08	18.07	19.00	0
		1	24	18.07	17.96	18.03	19.00	0
5	64-QAM	12	0	18.03	18.08	17.94	19.00	0
[12	6	18.03	17.95	17.98	19.00	0
		12	13	17.92	17.96	18.03	19.00	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
		25	0	18.09	17.94	17.98	19.00	0

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 138 of 255

			LTE Bai	nd 26_FCC				
BW(MHz)	Modulation	RB Size	RB Offset	Conducted power (dBm) Target Power +				
	Frequenc	y (MHz)		815.5	831.5	847.5	Max. Tolerance	Allowed per
	Channel				26865	27025	(dBm)	JOIT (UD)
		1	0	17.91	18.04	18.00	19.00	0
		1	7	17.90	18.02	18.07	19.00	0
		1	14	18.08	18.04	18.01	19.00	0
3 QPSK	QPSK	8	0	17.93	18.10	17.95	19.00	0
		8	4	18.03	17.96	17.97	19.00	0
		8	7	17.91	17.92	17.99	19.00	0
		15	0	17.99	17.97	17.95	19.00	0
		1	0	17.98	18.05	18.03	19.00	0
		1	7	18.06	18.07	17.91	19.00	0
		1	14	17.94	18.08	18.04	19.00	0
3	16-QAM	8	0	18.03	17.97	17.90	19.00	0
		8	4	18.01	17.91	18.03	19.00	0
		8	7	18.02	18.05	17.95	19.00	0
		15	0	18.02	18.09	17.92	19.00	0
		1	0	17.97	18.01	17.96	19.00	0
		1	7	18.02	17.95	18.03	19.00	0
		1	14	17.96	18.02	17.92	19.00	0
3	64-QAM	8	0	18.01	18.09	18.06	19.00	0
		8	4	18.06	18.04	17.91	19.00	0
		8	7	17.99	17.93	17.93	19.00	3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
		15	0	18.05	18.07	17.98	19.00	0

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 139 of 255

			LTE Bai	nd 26_FCC				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	(dBm)	Target Power +	MPR
	Frequenc	y (MHz)		814.7	831.5	848.3	Max. Tolerance	Allowed per 3GPP(dB)
	Channel				26865	27033	(dBm)	OOI I (db)
		1	0	18.00	18.04	18.09	19.00	0
		1	2	17.95	18.08	17.95	19.00	0
		1	5	17.99	17.92	18.03	19.00	0
1.4	QPSK	3	0	18.08	18.07	18.01	19.00	0
		3	2	18.00	18.10	18.01	19.00	0
		3	3	18.04	17.94	17.95	19.00	0
		6	0	17.98	18.05	17.93	19.00	0
		1	0	17.93	18.04	18.08	19.00	0
		1	2	17.91	18.07	18.04	19.00	0
		1	5	17.95	17.90	18.07	19.00	0
1.4	16-QAM	3	0	18.08	18.00	17.97	19.00	0
		3	2	17.95	18.04	18.07	19.00	0
		3	3	18.05	17.96	17.98	19.00	0
		6	0	18.09	17.97	18.07	19.00	0
		1	0	17.94	17.93	18.04	19.00	0
		1	2	17.94	18.03	18.00	19.00	0
		1	5	17.93	18.09	17.92	19.00	0
1.4	64-QAM	3	0	18.04	18.03	18.01	19.00	0
		3	2	17.91	17.94	18.03	19.00	0
		3	3	18.05	18.06	18.06	19.00	0
		6	0	17.95	17.92	17.95	19.00	0



Page: 140 of 255

			LTE	Band 66				
BW(MHz)	Modulation	RB Size	RB Offset	Conducted power (dBm) Target Power +				
	Frequenc		1720	1745	1770	Max. Tolerance	MPR Allowed per	
	Channel				132322	132572	(dBm)	JOIT (UD)
		1	0	12.41	12.49	12.45	12.50	0
		1	50	12.38	12.27	12.36	12.50	0
		1	99	12.33	12.30	12.24	12.50	0
20	QPSK	50	0	12.32	12.36	12.32	12.50	0
		50	25	12.31	12.31	12.22	12.50	0
		50	50	12.24	12.29	12.24	12.50	0
		100	0	12.32	12.31	12.27	12.50	0
		1	0	12.23	12.22	12.37	12.50	0
		1	50	12.37	12.39	12.34	12.50	0
		1	99	12.25	12.29	12.32	12.50	0
20	16-QAM	50	0	12.39	12.39	12.36	12.50	0
		50	25	12.22	12.36	12.22	12.50	0
		50	50	12.36	12.25	12.26	12.50	0
		100	0	12.26	12.27	12.39	12.50	0
		1	0	12.40	12.38	12.21	12.50	0
		1	50	12.34	12.31	12.24	12.50	0
		1	99	12.31	12.26	12.29	12.50	0
20	64-QAM	50	0	12.28	12.22	12.24	12.50	0
	ļ	50	25	12.32	12.40	12.21	12.50	0
		50	50	12.36	12.23	12.33	12.50	0 0 0 0 0 0 0 0 0 0 0 0 0 0
<u> </u>		100	0	12.40	12.35	12.40	12.50	0

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 141 of 255

			LTE	Band 66				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	(dBm)	Target	MPR
	Frequenc	1717.5	1745	1772.5	Max. Tolerance	Allowed per 3GPP(dB)		
	Channel			132047	132322	132597	(dBm)	3011 (db)
		1	0	12.24	12.20	12.22	12.50	0
		1	36	12.27	12.22	12.31	12.50	0
		1	74	12.33	12.30	12.29	12.50	0
15	QPSK	36	0	12.23	12.37	12.20	12.50	0
		36	18	12.23	12.39	12.33	12.50	0
		36	37	12.38	12.22	12.29	12.50	0
		75	0	12.29	12.28	12.36	12.50	0
		1	0	12.22	12.35	12.27	12.50	0
		1	36	12.26	12.24	12.33	12.50	0
		1	74	12.34	12.32	12.21	12.50	0
15	16-QAM	36	0	12.30	12.22	12.35	12.50	0
		36	18	12.22	12.24	12.29	12.50	0
		36	37	12.38	12.27	12.25	12.50	0
		75	0	12.33	12.38	12.34	12.50	0
		1	0	12.30	12.27	12.29	12.50	0
		1	36	12.24	12.32	12.24	12.50	0
		1	74	12.35	12.31	12.37	12.50	0
15	64-QAM	36	0	12.27	12.29	12.36	12.50	0
		36	18	12.32	12.37	12.34	12.50	0
		36	37	12.26	12.37	12.37	12.50	0
		75	0	12.29	12.34	12.31	12.50	0

t (886-2) 2299-3279

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

f (886-2) 2298-0488



Page: 142 of 255

			LTE	Band 66				
BW(MHz)	Modulation	RB Size	RB Offset	Conducted power (dBm) Target				
	Frequenc		1715	1745	1775	Power + Max. Tolerance	MPR Allowed per 3GPP(dB)	
	Channel				132322	132622	(dBm)	JGFF(GB)
		1	0	12.27	12.29	12.29	12.50	0
		1	25	12.20	12.28	12.30	12.50	0
		1	49	12.22	12.24	12.22	12.50	0
10	QPSK	25	0	12.26	12.38	12.36	12.50	0
		25	12	12.34	12.21	12.22	12.50	0
		25	25	12.23	12.22	12.28	12.50	0
		50	0	12.21	12.38	12.31	12.50	0
		1	0	12.31	12.32	12.30	12.50	0
		1	25	12.29	12.23	12.39	12.50	0
		1	49	12.32	12.21	12.26	12.50	0
10	16-QAM	25	0	12.22	12.36	12.22	12.50	0
		25	12	12.28	12.21	12.37	12.50	0
		25	25	12.29	12.36	12.25	12.50	0
		50	0	12.21	12.32	12.40	12.50	0
		1	0	12.28	12.32	12.39	12.50	0
		1	25	12.34	12.32	12.30	12.50	0
		1	49	12.25	12.33	12.31	12.50	0
10	64-QAM	25	0	12.37	12.22	12.31	12.50	0
		25	12	12.25	12.37	12.37	12.50	0
		25	25	12.38	12.29	12.33	12.50	0
			0	12.33	12.20	12.33	12.50	0

t (886-2) 2299-3279

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

f (886-2) 2298-0488



Page: 143 of 255

			LTE	Band 66				
BW(MHz)	Modulation	RB Size	RB Offset	Conducted power (dBm) Target Power +				
	Frequenc	1712.5	1745	1777.5	Max. Tolerance	Allowed per		
	Channel				132322	132647	(dBm)	MPR Allowed per 3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
		1	0	12.36	12.24	12.35	12.50	0
		1	12	12.25	12.31	12.39	12.50	0
		1	24	12.40	12.29	12.30	12.50	0
5	QPSK	12	0	12.37	12.37	12.28	12.50	0
		12	6	12.27	12.35	12.24	12.50	0
		12	13	12.25	12.33	12.31	12.50	0
		25	0	12.26	12.30	12.36	12.50	0
		1	0	12.33	12.33	12.29	12.50	0
		1	12	12.36	12.23	12.26	12.50	0
		1	24	12.37	12.27	12.29	12.50	0
5	16-QAM	12	0	12.23	12.35	12.39	12.50	0
		12	6	12.29	12.32	12.28	12.50	0
		12	13	12.22	12.21	12.33	12.50	0
		25	0	12.32	12.39	12.38	12.50	0
		1	0	12.29	12.34	12.22	12.50	0
		1	12	12.30	12.31	12.29	12.50	0
		1	24	12.28	12.25	12.21	12.50	0
5	64-QAM	12	0	12.30	12.31	12.38	12.50	0
		12	6	12.24	12.28	12.22	12.50	0
		12	13	12.26	12.26	12.36	12.50	3GPP(dB) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
ı		25	0	12.31	12.23	12.38	12.50	0

f (886-2) 2298-0488



Page: 144 of 255

			LTE	Band 66				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	Target Power +	MPR		
	Frequenc	y (MHz)		1711.5	1745	1778.5	Max. Tolerance	Allowed per 3GPP(dB)
	Channel				132322	132657	(dBm)	oci i (ub)
		1	0	12.30	12.21	12.37	12.50	0
		1	7	12.37	12.35	12.33	12.50	0
		1	14	12.37	12.40	12.21	12.50	0
3 QPSI	QPSK	8	0	12.38	12.36	12.36	12.50	0
		8	4	12.25	12.37	12.35	12.50	0
		8	7	12.23	12.28	12.27	12.50	0
		15	0	12.22	12.25	12.28	12.50	0
		1	0	12.31	12.34	12.33	12.50	0
		1	7	12.24	12.35	12.26	12.50	0
		1	14	12.35	12.30	12.31	12.50	0
3	16-QAM	8	0	12.34	12.23	12.23	12.50	0
		8	4	12.31	12.40	12.40	12.50	0
		8	7	12.21	12.27	12.38	12.50	0
		15	0	12.34	12.35	12.27	12.50	0
		1	0	12.24	12.28	12.38	12.50	0
		1	7	12.24	12.24	12.25	12.50	0
		1	14	12.35	12.36	12.22	12.50	0
3	64-QAM	8	0	12.37	12.28	12.36	12.50	0
		8	4	12.28	12.37	12.26	12.50	0
		8	7	12.31	12.30	12.23	12.50	0
		15	0	12.26	12.39	12.31	12.50	0



Page: 145 of 255

			LTE	Band 66				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	(dBm)	Target Power +	MPR
	Frequenc	y (MHz)		1710.7	1745	1779.3	Max. Tolerance	Allowed per 3GPP(dB)
	Char	nel		131979	132322	132665		
		1	0	12.27	12.35	12.31	12.50	0
		1	2	12.30	12.27	12.31	12.50	0
		1	5	12.32	12.35	12.25	12.50	0
1.4	QPSK	3	0	12.37	12.33	12.29	12.50	0
		3	2	12.37	12.31	12.37	12.50	0
		3	3	12.31	12.28	12.30	12.50	0
		6	0	12.35	12.27	12.24	12.50	0
		1	0	12.36	12.37	12.37	12.50	0
		1	2	12.24	12.26	12.22	12.50	0
		1	5	12.37	12.25	12.20	12.50	0
1.4	16-QAM	3	0	12.36	12.32	12.20	12.50	0
		3	2	12.36	12.30	12.20	12.50	0
		3	3	12.30	12.26	12.25	12.50	0
		6	0	12.37	12.37	12.38	12.50	0
		1	0	12.22	12.28	12.29	12.50	0
		1	2	12.32	12.40	12.24	12.50	0
		1	5	12.34	12.35	12.29	12.50	0
1.4	64-QAM	3	0	12.37	12.36	12.33	12.50	0
1		3	2	12.34	12.32	12.32	12.50	0
		3	3	12.30	12.26	12.30	12.50	0
		6	0	12.26	12.22	12.35	12.50	0

f (886-2) 2298-0488



Page: 146 of 255

5.4 TDD LTE

sensor off

ensor on			LTE	Band 38				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	(dBm)	Target Power +	MPR
	Frequenc	y (MHz)		2580	2595	2610		Allowed per 3GPP(dB)
	Char	nnel		37850				
		1	0	23.66	23.60	23.56	24.00	0
		1	50	23.35	23.51	23.45	24.00	0
		1	99	23.37	23.53	23.35	24.00	0
20	QPSK	50	0	22.42	22.46	22.47	23.00	1
		50	25	22.50	22.44	22.42	23.00	1
		50	50	22.50	22.49	22.46	23.00	1
		100	0	22.49	22.54	22.51	23.00	1
		1	0	22.45	22.50	22.37	23.00	1
		1	50	22.42	22.36	22.53	23.00	1
		1	99	22.37	22.48	22.54	23.00	1
20	16-QAM	50	0	21.48	21.40	21.40	22.00	2
		50	25	21.41	21.42	21.36	22.00	2
		50	50	21.50	21.48	21.42	22.00	2
		100	0	21.41	21.55	21.50	22.00	2
		1	0	21.41	21.47	21.42	22.00	2
		1	50	21.44	21.51	21.36	22.00	2
		1	99	21.49	21.37	21.40	22.00	2
20	64-QAM	50	0	20.48	20.46	20.39	21.00	3
	·	50	25	20.47	20.52	20.40	21.00	3
		50	50	20.46	20.54	20.38	21.00	3
ı		100	0	20.52	20.36	20.44	21.00	3



Page: 147 of 255

			LTE	Band 38				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	(dBm)	Target Power +	MPR
	Frequenc	y (MHz)		2577.5	2595	2612.5	Max. Tolerance	Allowed per 3GPP(dB)
	Char	nnel		37825	38000	38175	(dBm)	COLL (GD)
		1	0	23.55	23.50	23.55	24.00	0
		1	36	23.39	23.53	23.53	24.00	0
		1	74	23.51	23.42	23.38	24.00	0
15	QPSK	36	0	22.42	22.43	22.48	23.00	1
		36	18	22.55	22.42	22.49	23.00	1
		36	37	22.51	22.54	22.46	23.00	1
		75	0	22.47	22.39	22.48	23.00	1
		1	0	22.45	22.36	22.49	23.00	1
		1	36	22.54	22.41	22.46	23.00	1
		1	74	22.54	22.42	22.47	23.00	1
15	16-QAM	36	0	21.35	21.49	21.47	22.00	2
		36	18	21.43	21.46	21.47	22.00	2
		36	37	21.50	21.52	21.39	22.00	2
		75	0	21.38	21.52	21.43	22.00	2
		1	0	21.38	21.39	21.36	22.00	2
		1	36	21.45	21.40	21.45	22.00	2
		1	74	21.49	21.52	21.54	22.00	2
15	64-QAM	36	0	20.47	20.51	20.53	21.00	3
		36	18	20.38	20.53	20.52	21.00	3
		36	37	20.52	20.36	20.47	21.00	3
		75	0	20.43	20.47	20.47	21.00	3



Page: 148 of 255

			LTE	Band 38				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	(dBm)	Target Power +	MPR
	Frequenc	y (MHz)		2575	2595	2615	Max. Tolerance	Allowed per 3GPP(dB)
	Char	nnel		37800	38000	38200	(dBm)	OGI I (db)
		1	0	23.52	23.47	23.42	24.00	0
		1	25	23.52	23.43	23.52	24.00	0
		1	49	23.41	23.36	23.50	24.00	0
10	QPSK	25	0	22.36	22.42	22.41	23.00	1
		25	12	22.39	22.48	22.54	23.00	1
		25	25	22.45	22.54	22.53	23.00	1
		50	0	22.49	22.38	22.54	23.00	1
		1	0	22.53	22.46	22.36	36 23.00	1
		1	25	22.51	22.55	22.50	23.00	1
		1	49	22.50	22.46	22.45	23.00	1
10	16-QAM	25	0	21.39	21.44	21.35	22.00	2
		25	12	21.37	21.36	21.42	22.00	2
		25	25	21.46	21.53	21.38	22.00	2
		50	0	21.45	21.45	21.39	22.00	2
		1	0	21.42	21.37	21.54	22.00	2
		1	25	21.42	21.39	21.42	22.00	2
		1	49	21.35	21.43	21.38	22.00	2
10	64-QAM	25	0	20.45	20.41	20.46	21.00	3
		25	12	20.45	20.40	20.44	21.00	3
		25	25	20.49	20.39	20.43	21.00	3
		50	0	20.36	20.42	20.46	21.00	3

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279 f (886-2) 2298-0488 www.sgs.com.tw



Page: 149 of 255

			LTE	Band 38				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	(dBm)	Target Power +	MPR
	Frequenc	y (MHz)		2572.5	2595	2617.5	Max. Tolerance	Allowed per 3GPP(dB)
	Char	nnel		37775	38000	38225	(dBm)	001 1 (ub)
		1	0	23.47	23.43	23.52	24.00	0
		1	12	23.49	23.52	23.54	24.00	0
		1	24	23.42	23.35	23.51	24.00	0
5	QPSK	12	0	22.49	22.38	22.38	23.00	1
		12	6	22.46	22.45	22.44	23.00	1
		12	13	22.41	22.42	22.39	23.00	1
		25	0	22.47	22.38	22.36	23.00	1
		1	0	22.42	22.37	22.44	23.00	1
		1	12	22.41	22.39	22.54	23.00	1
		1	24	22.46	22.46	22.47	23.00	1
5	16-QAM	12	0	21.51	21.51	21.40	22.00	2
		12	6	21.41	21.41	21.43	22.00	2
		12	13	21.50	21.45	21.41	22.00	2
		25	0	21.38	21.38	21.35	22.00	2
		1	0	21.53	21.53	21.45	22.00	2
		1	12	21.43	21.47	21.47	22.00	2
		1	24	21.45	21.44	21.42	22.00	2
5	64-QAM	12	0	20.50	20.43	20.38	21.00	3
	0. 0	12	6	20.50	20.44	20.50	21.00	3
		12	13	20.43	20.35	20.44	21.00	3
		25	0	20.54	20.52	20.52	21.00	3

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 150 of 255

						age. 1				
		_		LTE	Band 41				_	_
BW(MHz)	Modulation	RB Size	RB Offset		Cond	ucted power	(dBm)		Target Power +	MPR
	Frequen	cy (MHz)		2506	2549.5	2593	2636.5	2680	Max. Tolerance	Allowed per 3GPP(dB)
	Cha	nnel		39750	40185	40620	41055	41490	(dBm)	0011 (db)
		1	0	23.79	23.68	23.87	23.85	23.81	24.00	0
		1	50	23.70	23.83	23.75	23.66	23.66	24.00	0
		1	99	23.77	23.75	23.84	23.68	23.73	24.00	0
20	QPSK	50	0	22.71	22.79	22.79	22.81	22.79	23.00	1
		50	25	22.79	22.85	22.67	22.81	22.73	23.00	1
		50	50	22.75	22.77	22.84	22.73	22.79	23.00	1
		100	0	22.74	22.79	22.69	22.68	22.68	23.00	1
		1	0	22.69	22.66	22.73	22.82	22.84	23.00	1
		1	50	22.80	22.69	22.70	22.73	22.75	23.00	1
		1	99	22.78	22.74	22.66	22.66	22.76	23.00	1
20	16-QAM	50	0	21.73	21.69	21.83	21.74	21.70	22.00	2
		50	25	21.75	21.81	21.69	21.82	21.83	22.00	2
		50	50	21.70	21.74	21.68	21.75	21.74	22.00	2
		100	0	21.73	21.75	21.70	21.73	21.79	22.00	2
		1	0	21.78	21.84	21.84	21.71	21.68	22.00	2
		1	50	21.78	21.76	21.76	21.69	21.80	22.00	2
00	04.0414	1	99	21.78	21.78	21.74	21.66	21.68	22.00	2
20	64-QAM	50	0	20.73	20.69	20.70	20.71	20.65	21.00	3
		50	25	20.71	20.82	20.80	20.75	20.77	21.00	3
		50	50	20.74	20.80	20.77	20.72	20.77	21.00	3
		100	0	20.76	20.69	20.82	20.68	20.75	21.00	3
				LIE	Band 41					
BW(MHz)	Modulation	RB Size	RB Offset		Cond	ucted power	(dBm)		Target Power +	MPR
	Frequen	cy (MHz)		2503.5	2548.3	2593	2637.8	2682.5	Max.	Allowed per 3GPP(dB)
	Cha	nnel		39725	40173	40620	41068	41515	Tolerance (dBm)	3GPP(UB)
I		1	0	23.71	23.74	23.79	23.74	23.83	24.00	0
		1	36	23.83	23.70	23.77	23.71	23.83	24.00	0
		1	74	23.85	23.82	23.67	23.79	23.67	24.00	0
15	QPSK	36	0	22.75	22.82	22.84	22.68	22.71	23.00	1
		36	18	22.77	22.78	22.79	22.75	22.81	23.00	1
		36	37	22.65	22.81	22.68	22.77	22.71	23.00	1
		75	0	22.82	22.68	22.67	22.81	22.79	23.00	1
		1	0	22.82	22.71	22.71	22.79	22.78	23.00	1
		1	36	22.66	22.69	22.80	22.73	22.67	23.00	1
		1	74	22.68	22.81	22.68	22.74	22.81	23.00	1
15	16-QAM	36	0	21.74	21.67	21.84	21.75	21.80	22.00	2
(1		36	18	21.78	21.78	21.68	21.76	21.74	22.00	2
]		36	37	21.73	21.83	21.66	21.83	21.75	22.00	2
l		75	0	21.83	21.78	21.74	21.67	21.85	22.00	2
		1	0	21.68	21.77	21.75	21.79	21.82	22.00	2
		1	36	21.73	21.73	21.69	21.72	21.83	22.00	2
		1	74	21.82	21.66	21.81	21.69	21.66	22.00	2
15	64-QAM	36	0	20.72	20.84	20.80	20.83	20.74	21.00	3
		36	18	20.82	20.70	20.80	20.70	20.77	21.00	3
		36	37	20.77	20.75	20.67	20.76	20.65	21.00	3
1		75	0	20.66	20.71	20.74	20.75	20.84	21.00	3

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at the times-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of locuments in the limits of liability, indemnification and purisdiction issues to the company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

Member of SGS Group



Page: 151 of 255

				LTE	Band 41					
BW(MHz)	Modulation	RB Size	RB Offset		Cond	ucted power	(dBm)		Target Power +	MPR
	Frequen	cy (MHz)		2501	2547	2593	2639	2685	Max. Tolerance	Allowed pe
	Cha	nnel		39700	40160	40620	41080	41540	(dBm)	OCI I (GD)
		1	0	23.79	23.81	23.72	23.84	23.74	24.00	0
		1	25	23.70	23.80	23.80	23.71	23.72	24.00	0
		1	49	23.83	23.79	23.79	23.82	23.66	24.00	0
10	QPSK	25	0	22.66	22.83	22.82	22.76	22.72	23.00	1
		25	12	22.78	22.79	22.72	22.83	22.74	23.00	1
		25	25	22.75	22.75	22.80	22.81	22.82	23.00	1
		50	0	22.76	22.66	22.76	22.76	22.70	23.00	1
		1	0	22.76	22.70	22.80	22.82	22.67	23.00	1
		1	25	22.65	22.65	22.77	22.80	22.70	23.00	1
		1	49	22.66	22.67	22.65	22.82	22.76	23.00	1
10	16-QAM	25	0	21.67	21.79	21.67	21.83	21.79	22.00	2
		25	12	21.81	21.81	21.81	21.78	21.70	22.00	2
		25	25	21.74	21.80	21.71	21.71	21.83	22.00	2
		50	0	21.83	21.66	21.76	21.79	21.82	22.00	2
		1	0	21.66	21.76	21.80	21.74	21.69	22.00	2
		1	25	21.80	21.68	21.70	21.84	21.71	22.00	2
40	04.0414	1	49	21.71	21.71	21.67	21.69	21.72	22.00	2
10	64-QAM	25	0	20.69	20.73	20.81	20.68	20.79	21.00	3
		25	12	20.82	20.78	20.66	20.84	20.77	21.00	3
		25 50	25 0	20.84	20.71	20.65 20.72	20.75 20.68	20.83	21.00	3
		50	U			20.72	20.00	20.75	21.00	<u> </u>
				LIE	Band 41					
BW(MHz)	Modulation	RB Size	RB Offset		Cond	ucted power	(dBm)		Target Power +	MPR
	Frequen	cy (MHz)		2498.5	2545.8	2593	2640.3	2687.5	Max.	Allowed pe
	Cha	nnel		39675	40148	40620	41093	41565	Tolerance (dBm)	3GPP(dB)
		1	0	23.77	23.74	23.72	23.73	23.75	24.00	0
		1	12	23.83	23.79	23.67	23.66	23.72	24.00	0
		1	24	23.83	23.70	23.82	23.85	23.68	24.00	0
5	QPSK	12	0	22.71	22.81	22.76	22.71	22.82	23.00	1
		12	6	22.69	22.79	22.74	22.69	22.77	23.00	1
		12	13	22.68	22.72	22.74	22.84	22.83	23.00	1
		25	0	22.66	22.70	22.76	22.80	22.74	23.00	1
	_ 	1	0	22.75	22.69	22.78	22.85	22.68	23.00	1
		1	12	22.71	22.75	22.69	22.84	22.76	23.00	1
		1	24	22.80	22.66	22.68	22.68	22.80	23.00	1
5	16-QAM	12	0	21.83	21.69	21.71	21.76	21.83	22.00	2
		12	6	21.79	21.81	21.66	21.77	21.79	22.00	2
		12	13	21.70	21.75	21.85	21.85	21.68	22.00	2
		25	0	21.73	21.81	21.69	21.68	21.74	22.00	2
		1	0	21.66	21.84	21.83	21.71	21.79	22.00	2
		1	12	21.78	21.75	21.66	21.77	21.70	22.00	2
					24 66	21.80	21.76	21.72	22.00	2
		1	24	21.83	21.66					
5	64-QAM	12	0	20.68	20.69	20.74	20.75	20.75	21.00	3
5	64-QAM	12 12	0 6	20.68 20.76	20.69 20.82	20.74 20.82	20.75 20.75	20.75 20.83	21.00 21.00	3
5	64-QAM	12	0	20.68	20.69	20.74	20.75	20.75	21.00	3

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at the times-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of locuments in the limits of liability, indemnification and purisdiction issues to the company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. prosecuted to the fullest extent of the law.



Page: 152 of 255

sensor on

	LTE Band 38												
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	(dBm)	Target Power +	MPR					
	Frequenc	y (MHz)		2580	2595	2610	Max. Tolerance	Allowed per 3GPP(dB)					
	Char	nnel		37850	38000	38150	(dBm)	OCI I (db)					
		1	0	17.11	17.15	17.21	17.50	0					
		1	50	17.08	16.99	16.98	17.50	0					
		1	99	17.00	17.07	17.01	17.50	0					
20	QPSK	50	0	17.09	16.95	17.02	17.50	0					
		50	25	16.95	16.95	16.91	17.50	0					
		50	50	17.05	17.05	17.06	17.50	0					
		100	0	16.93	17.02	16.93	17.50	0					
		1	0	16.98	16.98	17.06	17.50	0					
		1	50	17.06	16.91	16.95	17.50	0					
		1	99	17.07	17.01	17.07	17.50	0					
20	16-QAM	50	0	16.99	17.05	17.04	17.50	0					
		50	25	16.96	16.93	16.90	17.50	0					
		50	50	16.92	16.91	17.07	17.50	0					
		100	0	17.02	17.04	16.97	17.50	0					
		1	0	16.90	17.03	17.03	17.50	0					
		1	50	16.97	17.01	17.04	17.50	0					
		1	99	17.01	17.06	17.00	17.50	0					
20	64-QAM	50	0	17.00	16.99	17.07	17.50	0					
		50	25	17.08	17.10	17.05	17.50	0					
		50	50	16.97	17.00	16.94	17.50	0					
		100	0	16.93	17.01	16.96	17.50	0					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at the times-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of locuments in the limits of liability, indemnification and purisdiction issues to the company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 www.sgs.com.tw



Page: 153 of 255

			LTE	Band 38				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	(dBm)	Target Power +	MPR
	Frequenc	y (MHz)		2577.5	2595	2612.5	Max. Tolerance	Allowed per 3GPP(dB)
	Char	nnel		37825	38000	38175	(dBm)	JGFF(GD)
		1	0	16.94	17.01	17.10	17.50	0
		1	36	16.99	16.95	16.98	17.50	0
		1	74	16.91	16.90	17.00	17.50	0
15	QPSK	36	0	17.10	17.03	16.96	17.50	0
		36	18	17.10	17.03	16.99	17.50	0
		36	37	16.96	16.93	17.06	17.50	0
		75	0	17.05	16.94	17.03	17.50	0
		1	0	17.10	16.96	16.94	17.50	0
		1	36	16.91	16.90	16.95	17.50	0
		1	74	17.08	16.97	17.09	17.50	0
15	16-QAM	36	0	17.03	16.94	17.07	17.50	0
		36	18	16.93	16.92	17.04	17.50	0
		36	37	16.94	17.07	17.03	17.50	0
		75	0	16.92	17.05	17.01	17.50	0
		1	0	17.01	16.95	16.93	17.50	0
		1	36	17.05	17.07	16.97	17.50	0
		1	74	16.90	16.99	16.91	17.50	0
15	64-QAM	36	0	16.93	17.04	16.99	17.50	0
		36	18	16.93	17.08	16.93	17.50	0
		36	37	17.02	16.91	16.98	17.50	0
		75	0	16.98	16.91	17.05	17.50	0

台灣檢驗科技股份有限公司



Page: 154 of 255

			LTC	Band 38				
			LIE	Danu 38				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	(dBm)	Target Power +	MPR
	Frequenc	y (MHz)		2575	2595	2615	Max. Tolerance	Allowed per 3GPP(dB)
	Char	nel		37800	38000	38200	00 (dBm)	
		1	0	16.93	17.07	17.07	17.50	0
		1	25	17.00	16.97	16.92	17.50	0
		1	49	17.08	17.05	17.09	17.50	0
10	QPSK	25	0	17.00	17.06	17.09	17.50	0
		25	12	16.95	16.92	16.97	17.50	0
		25	25	17.06	16.94	16.96	17.50	0
		50	0	16.94	16.97	16.91	17.50	0
		1	0	17.04	17.02	16.93	17.50	0
		1	25	16.98	16.95	17.10	17.50	0
		1	49	16.99	16.94	17.05	17.50	0
10	16-QAM	25	0	16.91	16.98	16.94	17.50	0
		25	12	17.05	16.91	17.01	17.50	0
		25	25	16.91	17.04	17.08	17.50	0
		50	0	17.06	16.90	17.07	17.50	0
		1	0	16.99	16.90	16.96	17.50	0
		1	25	17.00	16.94	16.94	17.50	0
		1	49	16.99	16.92	16.97	17.50	0
10	64-QAM	25	0	16.96	16.93	16.95	17.50	0
		25	12	17.10	17.02	16.95	17.50	0
		25	25	17.09	17.00	17.08	17.50	0
		50	0	16.99	17.04	17.02	17.50	0



Page: 155 of 255

			LTE	Band 38				
BW(MHz)	Modulation	RB Size	RB Offset	Cond	ucted power	(dBm)	Target Power +	MPR
	Frequenc	y (MHz)		2572.5	2595	2617.5	Max. Tolerance	Allowed per 3GPP(dB)
	Char	nel		37775	38000	38225	(dBm)	COLT (GD)
		1	0	17.00	17.03	16.95	17.50	0
		1	12	17.09	17.07	17.08	17.50	0
		1	24	17.10	17.04	16.94	17.50	0
5	QPSK	12	0	16.96	16.96	17.09	17.50	0
		12	6	17.06	16.98	16.98	17.50	0
		12	13	16.97	17.02	16.91	17.50	0
		25	0	17.02	17.05	16.94	17.50	0
		1	0	16.97	17.03	16.95	17.50	0
		1	12	17.04	17.03	16.99	17.50	0
		1	24	17.00	16.92	17.00	17.50	0
5	16-QAM	12	0	17.01	16.93	17.06	17.50	0
		12	6	17.10	17.01	17.05	17.50	0
		12	13	17.06	17.03	17.09	17.50	0
		25	0	17.07	16.95	17.06	17.50	0
		1	0	16.92	16.99	16.93	17.50	0
		1	12	17.10	17.07	16.99	17.50	0
		1	24	17.08	17.05	17.07	17.50	0
5	64-QAM	12	0	17.02	17.06	17.02	17.50	0
		12	6	17.07	17.09	16.99	17.50	0
	 	12	13	16.94	17.08	17.01	17.50	0
		25	0	17.01	17.04	16.93	17.50	0



Page: 156 of 255

						age. I				
				LTE	Band 41					
BW(MHz)	Modulation	RB Size	RB Offset		Cond	ucted power	(dBm)		Target Power +	MPR
	Frequen	cy (MHz)		2506	2549.5	2593	2636.5	2680	Max. Tolerance	Allowed per 3GPP(dB)
	Cha	innel		39750	40185	40620	41055	41490	(dBm)	0011 (db)
		1	0	19.49	19.31	19.30	19.33	19.28	19.50	0
		1	50	19.10	19.19	19.07	19.06	19.16	19.50	0
		1	99	19.07	19.13	19.16	19.17	19.16	19.50	0
20	QPSK	50	0	19.03	19.20	19.09	19.15	19.12	19.50	0
		50	25	19.17	19.18	19.01	19.16	19.19	19.50	0
		50	50	19.13	19.09	19.12	19.05	19.14	19.50	0
		100	0	19.15 19.16	19.07 19.08	19.16 19.14	19.03 19.04	19.17 19.05	19.50 19.50	0
		1	50	19.16	19.06	19.14	19.04	19.05	19.50	0
		1	99	19.02	19.14	19.08	19.00	19.14	19.50	0
20	16-QAM	50	0	19.15	19.03	19.20	19.02	19.00	19.50	0
20	10 07 111	50	25	19.20	19.08	19.03	19.17	19.14	19.50	0
		50	50	19.10	19.08	19.15	19.14	19.06	19.50	0
		100	0	19.06	19.17	19.05	19.17	19.13	19.50	0
		1	0	19.19	19.02	19.11	19.13	19.03	19.50	0
		1	50	19.17	19.19	19.06	19.17	19.02	19.50	0
		1	99	19.16	19.00	19.05	19.12	19.11	19.50	0
20	64-QAM	50	0	19.09	19.08	19.11	19.05	19.19	19.50	0
		50	25	19.05	19.01	19.02	19.10	19.17	19.50	0
		50	50	19.18	19.13	19.15	19.04	19.18	19.50	0
		100	0	19.11	19.14	19.00	19.04	19.18	19.50	0
				LTE	Band 41					
BW(MHz)	Modulation	RB Size	RB Offset		Cond	ucted power	(dBm)		Target	
	Frequen	cy (MHz)		2503.5	2548.3	2593	2637.8	2682.5	Power + Max.	MPR Allowed per
	Cha	innel		39725	40173	40620	41068	41515	Tolerance (dBm)	3GPP(dB)
		1	0	19.15	19.14	19.08	19.12	19.16	19.50	0
		1	36	19.04	19.10	19.18	19.11	19.12	19.50	0
		1	74	19.00	19.16	19.05	19.10	19.15	19.50	0
15	QPSK	36	0	19.18	19.12	19.06	19.09	19.08	19.50	0
		36	18	19.03	19.15	19.06	19.19	19.08	19.50	0
		36	37	19.06	19.11	19.02	19.03	19.00	19.50	0
		75	0	19.01	19.19	19.08	19.16	19.02	19.50	0
		1	0	19.06	19.12	19.00	19.19	19.05	19.50	0
		1	36	19.11	19.16	19.05	19.10	19.10	19.50	0
45	40.0444	1	74	19.08	19.00	19.09	19.16	19.18	19.50	0
15	16-QAM	36	0	19.17	19.09	19.19	19.10	19.07	19.50	0
1		36	18	19.04	19.07	19.02	19.08	19.00	19.50	0
		36 75	37 0	19.12	19.06	19.11	19.07	19.18	19.50	0
		1	0	19.16 19.09	19.19 19.08	19.19 19.18	19.16 19.11	19.02 19.10	19.50 19.50	0
		1	36	19.09	19.08	19.18	19.11	19.10	19.50	0
		1	74	19.10	19.10	19.12	19.00	19.06	19.50	0
15	64-QAM	36	0	19.04	19.03	19.19	19.09	19.01	19.50	0
'5	OT SCHINI	36	18	19.03	19.00	19.05	19.03	19.00	19.50	0
		36	37	19.18	19.05	19.18	19.05	19.13	19.50	0
			٠.							

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at the times-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of locuments in the limits of liability, indemnification and purisdiction issues to the company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. prosecuted to the fullest extent of the law.



Page: 157 of 255

				LTE	Band 41					
BW(MHz)	Modulation	RB Size	RB Offset		Cond	ucted power	(dBm)		Target	1400
	Frequenc	y (MHz)		2501	2547	2593	2639	2685	Power + Max. Tolerance	MPR Allowed pe 3GPP(dB)
	Char	nnel		39700	40160	40620	41080	41540	(dBm)	JOFF(GB)
		1	0	19.13	19.11	19.10	19.03	19.08	19.50	0
		1	25	19.17	19.07	19.05	19.14	19.10	19.50	0
		1	49	19.04	19.04	19.05	19.01	19.05	19.50	0
10	QPSK	25	0	19.08	19.16	19.15	19.02	19.01	19.50	0
		25	12	19.12	19.12	19.01	19.01	19.08	19.50	0
		25	25	19.13	19.09	19.07	19.08	19.10	19.50	0
		50	0	19.08	19.11	19.09	19.19	19.04	19.50	0
		1	0	19.19	19.17	19.10	19.19	19.01	19.50	0
		1	25	19.07	19.04	19.14	19.12	19.09	19.50	0
		1	49	19.03	19.10	19.16	19.05	19.05	19.50	0
10	16-QAM	25	0	19.01	19.13	19.11	19.11	19.05	19.50	0
		25	12	19.02	19.15	19.03	19.20	19.04	19.50	0
		25	25	19.15	19.02	19.04	19.19	19.12	19.50	0
		50	0	19.13	19.19	19.02	19.09	19.11	19.50	0
		1	0	19.06	19.13	19.12	19.06	19.17	19.50	0
		1	25	19.13	19.05	19.15	19.03	19.14	19.50	0
		1	49	19.04	19.01	19.15	19.07	19.03	19.50	0
10	64-QAM	25	0	19.01	19.19	19.09	19.02	19.05	19.50	0
		25	12	19.20	19.05	19.02	19.06	19.18	19.50	0
		25	25	19.05	19.14	19.11	19.02	19.18	19.50	0
		50	0	19.16	19.05	19.06	19.20	19.18	19.50	0

				LTE	Band 41					
BW(MHz)	Modulation	RB Size	RB Offset		Cond	ucted power	(dBm)		Target Power +	MPR
	Frequenc	y (MHz)		2498.5	2545.8	2593	2640.3	2687.5	Max. Tolerance	Allowed per 3GPP(dB)
	Chan	nnel		39675	40148	40620	41093	41565	(dBm)	OOI I (db)
		1	0	19.11	19.18	19.16	19.11	19.13	19.50	0
		1	12	19.19	19.16	19.07	19.03	19.08	19.50	0
		1	24	19.01	19.06	19.06	19.17	19.06	19.50	0
5	QPSK	12	0	19.02	19.17	19.17	19.12	19.05	19.50	0
		12	6	19.14	19.07	19.10	19.05	19.15	19.50	0
		12	13	19.16	19.15	19.01	19.14	19.09	19.50	0
		25	0	19.14	19.13	19.00	19.08	19.13	19.50	0
		1	0	19.06	19.19	19.12	19.05	19.01	19.50	0
		1	12	19.04	19.08	19.05	19.15	19.15	19.50	0
		1	24	19.09	19.09	19.10	19.18	19.12	19.50	0
5	16-QAM	12	0	19.03	19.00	19.01	19.11	19.17	19.50	0
		12	6	19.02	19.03	19.20	19.18	19.08	19.50	0
		12	13	19.20	19.19	19.19	19.13	19.05	19.50	0
		25	0	19.05	19.03	19.13	19.01	19.00	19.50	0
		1	0	19.10	19.09	19.04	19.15	19.06	19.50	0
		1	12	19.05	19.15	19.05	19.14	19.14	19.50	0
		1	24	19.04	19.12	19.16	19.01	19.05	19.50	0
5	64-QAM	12	0	19.03	19.01	19.06	19.03	19.19	19.50	0
		12	6	19.15	19.12	19.07	19.09	19.04	19.50	0
		12	13	19.14	19.18	19.09	19.15	19.15	19.50	0
		25	0	19.10	19.11	19.14	19.13	19.07	19.50	0

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at the times-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of locuments in the limits of liability, indemnification and purisdiction issues to the company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. prosecuted to the fullest extent of the law.




Page: 158 of 255

5.5 LTE DL CA

LTE Downlink 2CA conducted power table

sensor off

						Two Com	ponent Cai	rrier Maximu	m Conduc	ted Power					
				PCC						so	CC		Power	(Level 1)	
PCC Band	PCC Bandwidth [MHz]	PCC (UL) Channel	PCC (UL) Frequency [MHz]	Modulation	PCC (UL) RB	PCC (UL) RB Offset	PCC (DL) Channel	PCC (DL) Frequency [MHz]	SCC Band	SCC Bandwidth [MHz]	SCC (DL) Channel	SCC (DL) Frequency [MHz]	LTE Tx.Power with DL CA active (dBm)	LTE Tx.Power with DL CA inactive (dBm)	Configurations
LTE B2	20	19100	1900	QPSK	1	0	1100	1980	LTE B2	20	902	1960.2	23.69	23.97	CA2C
LTE B2	20	18700	1860	QPSK	1	0	700	1940	LTE B2	20	898	1959.8	23.78	23.98	CA2C
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B7	20	3152	2660.2	23.33	23.58	CA7C
LTE B7	20	20850	2510	QPSK	1	0	2850	2630	LTE B7	20	3048	2649.8	23.41	23.77	CA7C
LTE B38	20	38150	2610	QPSK	1	0	38150	2610	LTE B38	20	37952	2590.2	23.24	23.56	CA38C
LTE B38	20	37850	2580	QPSK	1	0	37850	2580	LTE B38	20	38048	2599.8	23.30	23.66	CA38C
LTE B41	20	41490	2680	QPSK	1	0	41490	2680	LTE B41	20	41292	2660.2	23.55	23.81	CA41C
LTE B41	20	39750	2506	QPSK	1	0	39750	2506	LTE B41	20	39948	2525.8	23.51	23.79	CA41C
LTE B7	20	20850	2510	QPSK	1	0	2850	2630	LTE B7	20	3350	2680	23.41	23.77	CA7A-7A
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B7	20	2850	2630	23.33	23.58	CA7A-7A
LTE B41	20	39750	2506	QPSK	1	0	39750	2506	LTE B41	20	41490	2680	23.51	23.79	CA41A-41A
LTE B41	20	41490	2680	QPSK	1	0	41490	2680	LTE B41	20	39750	2506	23.55	23.81	CA41A-41A
LTE B66	20	132072	1720	QPSK	1	0	66536	2120	LTE B66	20	67036	2170	22.30	22.68	CA 66A-66A
LTE B66	20	132572	1770	QPSK	1	0	67036	2170	LTE B66	20	66536	2120	22.21	22.59	CA 66A-66A
LTE B2	20	18700	1860	QPSK	1	0	700	1940	LTE B5	10	2525	881.5	23.82	23.98	CA2A-5A
LTE B5	10	20525	836.5	QPSK	1	0	2525	881.5	LTE B2	20	900	1960	23.64	23.91	CA2A-5A
LTE B4	20	20050	1720	QPSK	1	0	2050	2120	LTE B5	10	2525	881.5	23.71	23.97	CA4A-5A
LTE B5	10	20525	836.5	QPSK	1	0	2525	881.5	LTE B4	20	2175	2132.5	23.54	23.91	CA4A-5A
LTE B5	10	20525	836.5	QPSK	1	0	2525	881.5	LTE B7	20	3100	2655	23.61	23.91	CA5A-7A
LTE B7	20	20850	2510	QPSK	1	0	2850	2630	LTE B5	10	2525	881.5	23.46	23.77	CA5A-7A
LTE B5	10	20525	836.5	QPSK	1	0	2525	881.5	LTE B41	20	40620	2593	23.63	23.91	CA 5A-41A
LTE B41	20	40620	2593	QPSK	1	0	40620	2593	LTE B5	10	2525	881.5	23.52	23.87	CA5A-41A
LTE B5	10	20525	836.5	QPSK	1	0	2525	881.5	LTE B66	20	66786	2145	23.55	23.91	CA5A-66A
LTE B66	20	132322	1745	QPSK	1	0	66786	2145	LTE B5	10	2525	881.5	22.63	23.12	CA5A-66A
LTE B26	15	26865	831.5	QPSK	1	0	8865	876.5	LTE B41	20	40620	2593	23.12	23.41	CA26A-41A
LTE B41	20	40620	2593	QPSK	1	0	40620	2593	LTE B26	15	8865	876.5	23.47	23.87	CA 26A-41A






Page: 159 of 255

sensor on

						Two Com	onent Ca	rrier Maximu	ım Conduc	ted Power					
				PCC						sc	C		Power	(Level 1)	
PCC Band	PCC Bandwidth [MHz]	PCC (UL) Channel	PCC (UL) Frequency [MHz]	Modulation	PCC (UL) RB	PCC (UL) RB Offset	PCC (DL) Channel	PCC (DL) Frequency [MHz]	SCC Band	SCC Bandwidth [MHz]	SCC (DL) Channel	SCC (DL) Frequency [MHz]	LTE Tx.Power with DL CA active (dBm)	LTE Tx.Power with DL CA inactive (dBm)	Configuration
LTE B2	20	19100	1900	QPSK	1	0	1100	1980	LTE B2	20	902	1960.2	12.12	12.64	CA2C
LTE B2	20	18700	1860	QPSK	50	25	700	1940	LTE B2	20	898	1959.8	12.24	12.53	CA2C
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B7	20	3152	2660.2	13.14	13.63	CA7C
LTE B7	20	20850	2510	QPSK	1	0	2850	2630	LTE B7	20	3048	2649.8	13.35	13.75	CA7C
LTE B38	20	38150	2610	QPSK	1	0	38150	2610	LTE B38	20	37952	2590.2	17.06	17.21	CA38C
LTE B38	20	37850	2580	QPSK	1	0	37850	2580	LTE B38	20	38048	2599.8	16.93	17.11	CA38C
LTE B41	20	41490	2680	QPSK	1	0	41490	2680	LTE B41	20	41292	2660.2	18.84	19.28	CA41C
LTE B41	20	39750	2506	QPSK	1	0	39750	2506	LTE B41	20	39948	2525.8	19.18	19.49	CA41C
LTE B7	20	20850	2510	QPSK	1	0	2850	2630	LTE B7	20	3350	2680	13.28	13.75	CA7A7A
LTE B7	20	21350	2560	QPSK	1	0	3350	2680	LTE B7	20	2850	2630	13.11	13.63	CA7A7A
LTE B41	20	39750	2506	QPSK	1	0	39750	2506	LTE B41	20	41490	2680	19.22	19.49	CA41A-41A
LTE B41	20	41490	2680	QPSK	1	0	41490	2680	LTE B41	20	39750	2506	18.79	19.28	CA41A-41A
LTE B66	20	132072	1720	QPSK	1	0	66536	2120	LTE B66	20	67036	2170	11.98	12.41	CA 66A-66A
LTE B66	20	132572	1770	QPSK	1	0	67036	2170	LTE B66	20	66536	2120	12.04	12.45	CA 66A-66A
LTE B2	20	18900	1880	QPSK	1	0	900	1960	LTE B5	10	2525	881.5	12.29	12.66	CA2A-5A
LTE B5	10	20450	829	QPSK	1	0	2450	874	LTE B2	20	900	1960	19.15	19.44	CA2A-5A
LTE B4	20	20050	1720	QPSK	1	0	2050	2120	LTE B5	10	2525	881.5	13.55	13.92	CA4A-5A
LTE B5	10	20450	829	QPSK	1	0	2450	874	LTE B4	20	2175	2132.5	19.10	19.44	CA4A-5A
LTE B5	10	20450	829	QPSK	1	0	2450	874	LTE B7	20	3100	2655	19.16	19.44	CA5A-7A
LTE B7	20	20850	2510	QPSK	1	0	2850	2630	LTE B5	10	2525	881.5	13.44	13.75	CA5A-7A
LTE B5	10	20450	829	QPSK	1	0	2450	874	LTE B41	20	40620	2593	19.02	19.44	CA5A-41A
LTE B41	20	39750	2506	QPSK	1	0	39750	2506	LTE B5	10	2525	881.5	19.12	19.49	CA5A-41A
LTE B5	10	20450	829	QPSK	1	0	2450	874	LTE B66	20	66786	2145	19.09	19.44	CA5A-66A
LTE B66	20	132322	1745	QPSK	1	0	66786	2145	LTE B5	10	2525	881.5	12.22	12.49	CA5A-66A
LTE B26	15	26865	831.5	QPSK	1	0	8865	876.5	LTE B41	20	40620	2593	17.86	18.21	CA 26A-41A
LTE B41	20	39750	2506	QPSK	1	0	39750	2506	LTE B26	15	8865	876.5	19.21	19.49	CA26A-41A





Page: 160 of 255

LTE CA information

A)

The device supports downlink LTE Carrier Aggregation (CA) only. Other Release 10 features or higher features are not supported, including Enhanced SC-FDMA, Uplink MIMO or other antenna diversity configurations etc. All uplink communications are identical to the Release 8 Specifications.

The possible downlink LTE CA combinations supported by this device are as below tables per 3GPP TS 36.521-1. The conducted power measurement results of downlink LTE CA are provided as above per 3GPP TS 36.521-1. According to KDB 941225 D05A and RF exposure procedures in TCB workshop April 2018, the downlink LTE CA SAR test is not required.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 161 of 255

B)

CA combination table

Index	2CC	Restriction	Completely Covered by Measurement Superset
2CC #1	CA 2C		No
2CC #2	CA 7C		No
2CC #3	CA 38C		No
2CC #4	CA 41C		No
2CC #5	CA 7A-7A		No
2CC #6	CA 41A-41A		No
2CC #7	CA 66A-66A	766	No
2CC #8	CA 2A-5A		No
2CC #9	CA 4A-5A		No
2CC #10	CA 5A-7A		No
2CC #11	CA 5A-41A		No
2CC #12	CA 5A-66A		No
2CC #13	CA 26A-41A		No



Page: 162 of 255

Note:

- 1) The channel spacing and aggregated channel bandwidth for CA are identical to the associated specification in 3GPP TS 36.521-1.
- 2) The reference test frequencies for CA refers to 3GPP TS 36.508.
- 3) Testing is not required in bands or modes not intended/allowed for US operation
- 4) Based on TCB workshop April 2018, only indicate "No" in CA combination table need power measurement

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 163 of 255

5.6 LTE DL MIMO

SAR test exclusion for LTE DL MIMO was determined by UL power measurements with and without DL MIMO. SAR for DL MIMO was not needed since the maximum output power with DL MIMO active was not > 0.25dB higher than the maximum output power with DL MIMO inactive.

sensor off

			DL MIMO	maximum	power verifi	cation			
			PCC				TX power level 1 (dBm)		
			UL				DL MIMO	DL MIMO	
Band	Bandwidth [MHz]	Modulation	RB	RB Offset	Frequency [MHz]	Channel	active	inactive	
LTE B2	20	QPSK	1	0	1860	18700	23.73	23.98	
LTE B4	20	QPSK	1	0	1720	20050	23.70	23.97	
LTE B5	10	QPSK	1	0	836.5	20525	23.60	23.91	
LTE B7	20	QPSK	1	0	2510	20850	23.49	23.77	
LTE B26	15	QPSK	1	0	831.5	26865	23.14	23.41	
LTE B66	20	QPSK	1	0	1745	132322	22.82	23.12	
LTE B38	20	QPSK	1	0	2580	37850	23.41	23.66	
LTE B41	20	QPSK	1	0	2593	40620	23.59	23.87	

sensor on

			DL MIMO	maximum	power verifi	cation			
			PCC				TX power level 1 (dBm)		
			UL				DL MIMO	DL MIMO	
Band	Bandwidth [MHz]	Modulation	RB	RB Offset	Frequency [MHz]	Channel	active	inactive	
LTE B2	20	QPSK	1	0	1880	18900	12.27	12.66	
LTE B4	20	QPSK	1	0	1720	20050	13.48	13.92	
LTE B5	10	QPSK	1	0	829	20450	18.98	19.44	
LTE B7	20	QPSK	1	0	2510	20850	13.39	13.75	
LTE B26	15	QPSK	1	0	831.5	26865	18.01	18.21	
LTE B66	20	QPSK	1	0	1745	132322	12.11	12.49	
LTE B38	20	QPSK	1	0	2610	38150	16.73	17.21	
LTE B41	20	QPSK	1	0	2506	39750	19.13	19.49	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

所持力有成功 * 地報告記术性到规成之株血程具 * 門中却成体血程体出列人* 全報音术整本公司音曲正可 * 不可能力接致 * This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be responsible to the full extent of the law. prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

www.sgs.com.tw



Page: 164 of 255

5.7 WLAN

nsor off						
	_		Ant 4			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		1	2412		11.00	10.47
	802.11b	6	2437	1Mbps	11.00	10.64
		11	2462		11.00	10.68
		1	2412		14.50	14.14
2.45GHz	802.11g	6	2437	6Mbps	14.50	14.17
		11	2462	1 '	14.50	14.15
		1	2412		14.00	13.52
	802.11n20-HT0	6	2437	MCS0	14.00	13.66
		11	2462	1	14.00	13.58
			Ant 4			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		36	5180		14.50	14.14
		40	5200	1	14.50	14.08
	802.11a	44	5220	- 6Mbps	14.50	14.12
		48	5240	1	14.50	14.17
		36	5180		14.50	14.01
	000 44 00 1170	40	5200	1	14.50	13.99
	802.11n20-HT0	44	5220	MCS0	14.50	14.00
		48	5240	1	14.50	13.92
5.15-5.25 GHz		36	5180		14.50	13.92
	802.11ac20-VHT0	40	5200	MCS0	14.50	13.95
	002.11aC2U-VH1U	44	5220	IVICSU	14.50	14.03
		48	5240		14.50	14.02
	802.11n40-HT0	38	5190	MCS0	14.00	13.88
	002.111 14 0 - Π10	46	5230	IVICOU	14.00	13.92
	802.11ac40-VHT0	38	5190	MCS0	14.00	13.79
		46	5230		14.00	13.92
	802.11ac80-VHT0	42	5210	MCS0	13.50	13.48



Page: 165 of 255

		· ·	Ant 4			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		52	5260		14.50	14.14
	802.11a	56	5280	6Mbps	14.50	14.10
	002.11a	60	5300	Olvibbs	14.50	14.19
		64	5320		14.50	14.15
		52	5260		14.50	13.89
	000 44×00 LITO	56	5280	MCS0	14.50	14.02
	802.11n20-HT0	60	5300		14.50	14.06
		64	5320		14.50	13.99
5.25-5.35 GHz		52	5260		14.50	14.01
	000 4400 V/UTO	56	5280	MCCO	14.50	14.03
	802.11ac20-VHT0	60	5300	MCS0	14.50	14.10
		64	5320		14.50	14.03
	000 44×40 LITO	54	5270	MCCO	14.00	13.91
	802.11n40-HT0	62	5310	MCS0	14.00	13.98
	000 44 40 \ // ITO	54	5270	MCCO	14.00	13.85
	802.11ac40-VHT0	62	5310	MCS0	14.00	13.95
	802.11ac80-VHT0	58	5290	MCS0	13.50	13.06

台灣檢驗科技股份有限公司



Page: 166 of 255

		,	Ant 4			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		100	5500		14.00	13.80
	000.44	120	5600	1	14.00	13.81
	802.11a	140	5700	- 6Mbps	14.00	13.72
		144	5720	1	14.00	13.84
		100	5500		14.00	13.77
	000 44 00 1570	120	5600		14.00	13.75
	802.11n20-HT0	140	5700	MCS0	14.00	13.80
		144	5720	1	14.00	13.74
		100	5500		14.00	13.74
		120	5600	1	14.00	13.81
	802.11ac20-VHT0	140	5700	MCS0	14.00	13.73
5.6GHz		144	5720	1	14.00	13.71
		102	5510		14.00	13.73
		118	5590	1	14.00	13.71
	802.11n40-HT0	134	5670	MCS0	14.00	13.88
		142	5710	-	14.00	13.75
		102	5510		14.00	13.67
		118	5590	1	14.00	13.57
	802.11ac40-VHT0	134	5670	MCS0	14.00	13.84
		142	5710	1	14.00	13.80
		106	5530		13.50	13.20
	802.11ac80-VHT0	122	5610	MCS0	13.50	13.02
		138	5690	1	13.50	12.95
			Ant 4		.0.00	12.00
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		149	5745		14.00	13.50
	802.11a	157	5785	6Mbps	14.00	13.48
		165	5825		14.00	13.54
		149	5745		14.00	13.52
	802.11n20-HT0	157	5785	MCS0	14.00	13.63
		165	5825		14.00	13.57
5.8GHz		149	5745]	14.00	13.55
0.001 12	802.11ac20-VHT0	157	5785	MCS0	14.00	13.61
		165	5825		14.00	13.50
	802.11n40-HT0	151	5755	MCS0	14.00	13.66
	002.111170-1110	159	5795	10000	14.00	13.55
	802.11ac40-VHT0	151	5755	MCS0	14.00	13.48
		159	5795		14.00	13.56
	802.11ac80-VHT0	155	5775	MCS0	13.50	13.23

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at the times-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of locuments in the limits of liability, indemnification and purisdiction issues to the company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw



Page: 167 of 255

Band	Mode 802.11a 802.11n20-HT0	36 40 44 48 36	Frequency (MHz) 5180 5200 5220 5240	Data Rate 6Mbps	Max. Rated Avg. Power + Max. Tolerance (dBm) 8.50 8.50 8.50	Average power (dBm) 8.32 8.29
Band	802.11a	36 40 44 48	5180 5200 5220		Power + Max. Tolerance (dBm) 8.50 8.50	9.32 8.32 8.29
		40 44 48	5200 5220	6Mbps	8.50	8.29
_		40 44 48	5200 5220	6Mbps	8.50	8.29
_		48	5220	6 6 Nibps		
	802.11n20-HT0					8.31
	802.11n20-HT0	36			8.50	8.30
	802.11n20-HT0	50	5180		8.50	8.22
	802.11n20-HT0	40	5200	MCS0	8.50	8.12
	302	44	5220	IVICSU	8.50	8.21
_		48	5240		8.50	8.29
5.15-5.25 GHz		36	5180] [8.50	8.24
	802.11ac20-VHT0	40	5200	MCS0	8.50	8.17
	002.110020-11110	44	5220	WOOO	8.50	8.30
		48	5240		8.50	8.20
	802.11n40-HT0	38	5190	MCS0	8.00	7.61
_	002.1111101110	46	5230		8.00	7.72
	802.11ac40-VHT0	38	5190	MCS0	8.00	7.74
_		46	5230		8.00	7.64
	802.11ac80-VHT0	42	5210	MCS0	7.50	7.20
		F	Ant 4	1		
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		52	5260		8.00	7.87
	802.11a	56	5280	6Mbps	8.00	7.91
	002.11a	60	5300	GIVIDPS	8.00	7.92
_		64	5320		8.00	7.79
		52	5260		8.00	7.80
	ļ	56	5280	MCS0	8.00	7.71
	802.11n20-HT0	60	5300		8.00	7.72
	802.11n20-HT0	60				
	802.11n20-HT0	64	5320		8.00	7.71
5.25-5.35 GHz	802.11n20-HT0	64 52	5320 5260		8.00	7.79
5.25-5.35 GHz		64 52 56	5320 5260 5280	MCS0	8.00 8.00	7.79 7.66
5.25-5.35 GHz	802.11n20-HT0 802.11ac20-VHT0	64 52 56 60	5320 5260 5280 5300	MCS0	8.00 8.00 8.00	7.79 7.66 7.66
5.25-5.35 GHz		64 52 56 60 64	5320 5260 5280 5300 5320	- MCS0	8.00 8.00 8.00 8.00	7.79 7.66 7.66 7.76
5.25-5.35 GHz	802.11ac20-VHT0	64 52 56 60 64 54	5320 5260 5280 5300 5320 5270	MCS0 -	8.00 8.00 8.00 8.00 7.50	7.79 7.66 7.66 7.76 7.30
5.25-5.35 GHz		64 52 56 60 64 54	5320 5260 5280 5300 5320 5270 5310	-	8.00 8.00 8.00 8.00 7.50 7.50	7.79 7.66 7.66 7.76 7.30 7.13
5.25-5.35 GHz	802.11ac20-VHT0	64 52 56 60 64 54	5320 5260 5280 5300 5320 5270	-	8.00 8.00 8.00 8.00 7.50	7.79 7.66 7.66 7.76 7.30

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at the times-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of locuments in the limits of liability, indemnification and purisdiction issues to the company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. prosecuted to the fullest extent of the law.



Page: 168 of 255

			1 nt 1			
		,	Ant 4			
Band	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		100	5500		5.50	5.26
	000.44	120	5600	1	5.50	5.25
	802.11a	140	5700	6Mbps	5.50	5.19
		144	5720	1	5.50	5.18
		100	5500		5.50	5.14
	000 44 00 1170	120	5600		5.50	5.16
	802.11n20-HT0	140	5700	MCS0	5.50	5.29
		144	5720	1	5.50	5.20
		100	5500		5.50	5.24
	000 4400 \/LITO	120	5600	MCCO	5.50	5.20
	802.11ac20-VHT0	140	5700	MCS0	5.50	5.30
5.6GHz		144	5720		5.50	5.25
		102	5510		5.50	5.12
	902 11×10 LITO	118	5590	MCS0	5.50	5.18
	802.11n40-HT0	134	5670	IVICSU	5.50	5.33
		142	5710		5.50	5.25
		102	5510		5.50	5.26
	802.11ac40-VHT0	118	5590	MCS0	5.50	5.20
	002.11a040-V1110	134	5670	IVICSU	5.50	5.22
		142	5710		5.50	5.18
		106	5530		5.00	4.71
	802.11ac80-VHT0	122	5610	MCS0	5.00	4.66
		138	5690		5.00	4.77
		,	Ant 4			
Mode	Mode	Channel	Frequency (MHz)	Data Rate	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
		149	5745		5.50	5.15
	802.11a	157	5785	6Mbps	5.50	5.35
		165	5825		5.50	5.18
		149	5745	1	5.50	5.37
	802.11n20-HT0	157	5785	MCS0	5.50	5.29
		165	5825		5.50	5.37
5.8GHz		149	5745		5.50	5.16
0.001 12	802.11ac20-VHT0	157	5785	MCS0	5.50	5.30
		165	5825		5.50	5.21
	802.11n40-HT0	151	5755	MCS0	5.50	5.06
	002.1711101110	159	5795	555	5.50	5.39
	802.11ac40-VHT0	151	5755	MCS0	5.50	5.38
		159	5795		5.50	5.23
	802.11ac80-VHT0	155	5775	MCS0	5.00	4.93

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at the times-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of locuments in the limits of liability, indemnification and purisdiction issues to the company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sgs.com.tw



Page: 169 of 255

5.8 Bluetooth

sensor off

			1Mbps		2Mbps		3Mbps	
Mode	Channel	Frequency (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
	CH 00	2402		9.10		5.53		5.43
BR/EDR	CH 39	2441	10.00	9.04	6.00	5.41	6.00	5.44
	CH 78	2480		9.15		5.60		5.61

sensor on

CIISOI O	!!							
			1Mbps		2Mbps		3Mbps	
Mode	Channel	Frequency (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Average power (dBm)
	CH 00	2402		5.22		5.21		5.13
BR/EDR	CH 39	2441	6.00	5.84	6.00	5.51	6.00	5.50
	CH 78	2480		5.78		5.26		5.21

5.9 BLE


Mode	Channel	Frequency	(GFSK
Wode	Channel	(MHz)	Max. Rated Avg.Power + Max. Tolerance (dBm)	Average Output Power (dBm)
	CH 00	2402		-4.55
BLE_1M	CH 19	2440	-4	-4.73
	CH 39	2480		-4.58
Mode	Channel	Frequency	(GFSK
ivioue	Chariner	(MHz)	Max. Rated Avg.Power + Max. Tolerance (dBm)	Average Output Power (dBm)
	CH 00	2402		-4.86
BLE_2M	CH 19	2440	-4	-4.99
1	CH 39	2480		-4.78



Page: 170 of 255

2.4G b duty

(8.38/8.42=0.995) Scaling Factor=1.005

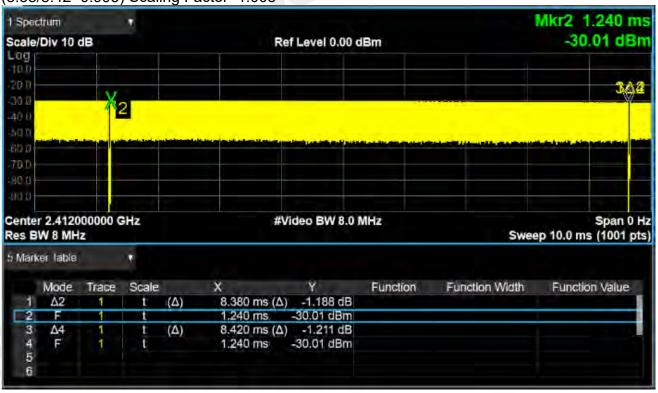

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

所持力有成功 * 地報告記术性到规成之株血程具 * 門中却成体血程体出列人* 全報音术整本公司音曲正可 * 不可能力接致 * This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be responsible to the full extent of the law. prosecuted to the fullest extent of the law.


台灣檢驗科技股份有限公司



Page: 171 of 255

BT duty

(2.86/3.74=0.765) Scaling Factor=1.307

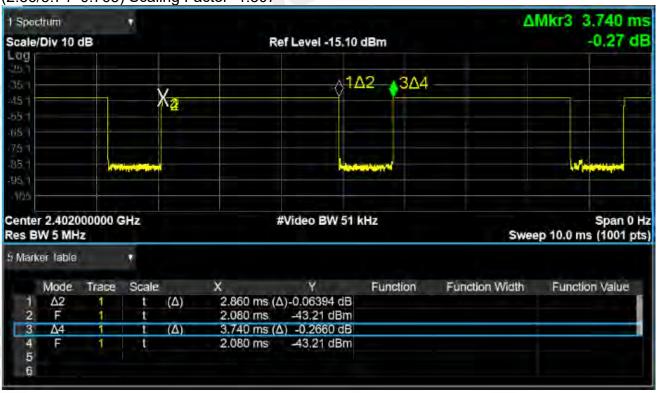

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


所持力有成功 * 地報告記术性到规成之株血程具 * 門中却成体血程体出列人* 全報音术整本公司音曲正可 * 不可能力接致 * This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be responsible to the full extent of the law. prosecuted to the fullest extent of the law.



Page: 172 of 255

5G a duty

(1.392/1.428=0.975) Scaling Factor=1.026

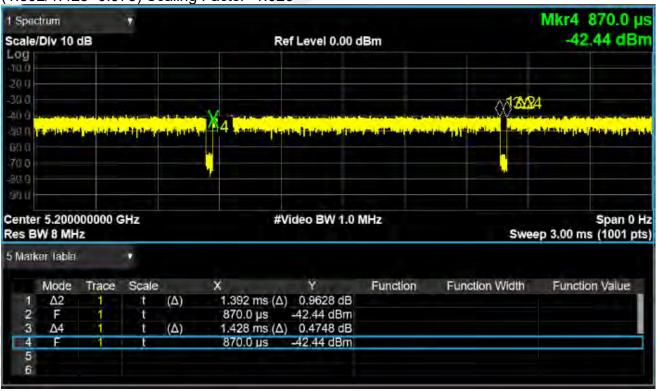

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


f (886-2) 2298-0488



Page: 173 of 255

5G n(40M) duty

(936/974=0.961) Scaling Factor=1.041

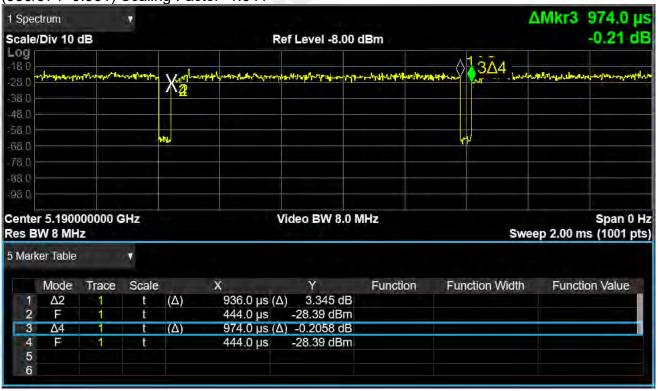

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 174 of 255

SUMMARY OF RESULTS

6.1 **Decision rules**

Reported measurement data comply with Test Methodology in section 1.1.

Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

Summary of SAR Results 6.2

sensor off Ant1

Band	Position	Distance	CH	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling		AR over 1g kg)	Plot page
Dailu	1 USIGOTI	(mm)	OII	(MHz)	Tolerance (dBm)	(dBm)	Coaling	Measured	Reported	1 lot page
GPRS850<1Dn4Up>	Back Surface	16	128	824.2	29.0	28.64	108.64%	0.266	0.289	-
GPRS850<1Dn4Up>	Back Surface	16	190	836.6	29.0	28.91	102.09%	0.305	0.311	001
GPRS850<1Dn4Up>	Back Surface	16	251	848.8	29.0	28.63	108.89%	0.270	0.294	-
GPRS850<1Dn4Up>	Top Edge	17	190	836.6	29.0	28.91	102.09%	0.101	0.103	-
GPRS850<1Dn4Up>	Bottom Edge	0	190	836.6	29.0	28.91	102.09%	0.027	0.028	-
GPRS850<1Dn4Up>	Left Edge	0	190	836.6	29.0	28.91	102.09%	0.133	0.136	-
GPRS850<1Dn4Up>	Right Edge	0	190	836.6	29.0	28.91	102.09%	0.040	0.041	-
2nd source spot-check	Back Surface	16	190	836.6	29.0	28.91	102.09%	0.293	0.299	-
GPRS1900<1Dn4Up>	Back Surface	16	512	1850.2	26.0	25.88	102.80%	0.444	0.456	-
GPRS1900<1Dn4Up>	Back Surface	16	661	1880	26.0	25.93	101.62%	0.490	0.498	002
GPRS1900<1Dn4Up>	Back Surface	16	810	1909.8	26.0	25.80	104.71%	0.439	0.460	-
GPRS1900<1Dn4Up>	Top Edge	17	661	1880	26.0	25.93	101.62%	0.345	0.351	-
GPRS1900<1Dn4Up>	Bottom Edge	0	661	1880	26.0	25.93	101.62%	0.019	0.020	-
GPRS1900<1Dn4Up>	Left Edge	0	661	1880	26.0	25.93	101.62%	0.114	0.116	-
GPRS1900<1Dn4Up>	Right Edge	0	661	1880	26.0	25.93	101.62%	0.030	0.030	-
2nd source spot-check	Back Surface	16	661	1880	26.0	25.93	101.62%	0.456	0.463	-

Band	Position	Distance	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling		SAR over 1g /kg)	Plot page
Banu	Position	(mm)	CH	(MHz)	Tolerance (dBm)	(dBm)	Staling	Measured	Reported	riot page
WCDMA Band II	Back Surface	16	9262	1852.4	24.0	23.53	111.43%	0.723	0.806	\.
WCDMA Band II	Back Surface	16	9400	1880	24.0	23.57	110.41%	0.805	0.889	003
WCDMA Band II	Back Surface	16	9538	1907.6	24.0	23.41	114.55%	0.772	0.884	
WCDMA Band II	Top Edge	17	9400	1880	24.0	23.57	110.41%	0.487	0.538	-
WCDMA Band II	Bottom Edge	0	9400	1880	24.0	23.57	110.41%	0.011	0.012	-
WCDMA Band II	Left Edge	0	9400	1880	24.0	23.57	110.41%	0.055	0.061	-
WCDMA Band II	Right Edge	0	9400	1880	24.0	23.57	110.41%	0.017	0.019	-
2nd source spot-check	Back Surface	16	9400	1880	24.0	23.57	110.41%	0.788	0.870	-
WCDMA Band IV	Back Surface	16	1312	1712.4	24.0	23.61	109.40%	0.538	0.589	-
WCDMA Band IV	Back Surface	16	1412	1732.4	24.0	23.56	110.66%	0.519	0.574	-
WCDMA Band IV	Back Surface	16	1513	1752.6	24.0	23.62	109.14%	0.607	0.663	004
WCDMA Band IV	Top Edge	17	1513	1752.6	24.0	23.62	109.14%	0.372	0.406	-
WCDMA Band IV	Bottom Edge	0	1513	1752.6	24.0	23.62	109.14%	0.022	0.024	-
WCDMA Band IV	Left Edge	0	1513	1752.6	24.0	23.62	109.14%	0.073	0.080	-
WCDMA Band IV	Right Edge	0	1513	1752.6	24.0	23.62	109.14%	0.019	0.021	-
2nd source spot-check	Back Surface	16	1513	1752.6	24.0	23.62	109.14%	0.602	0.657	
WCDMA Band V	Back Surface	16	4132	826.4	24.0	23.84	103.75%	0.361	0.375	-
WCDMA Band V	Back Surface	16	4183	836.6	24.0	23.91	102.09%	0.386	0.394	005
WCDMA Band V	Back Surface	16	4233	846.6	24.0	23.79	104.95%	0.370	0.388	-
WCDMA Band V	Top Edge	17	4183	836.6	24.0	23.91	102.09%	0.139	0.142	-
WCDMA Band V	Bottom Edge	0	4183	836.6	24.0	23.91	102.09%	0.021	0.021	-
WCDMA Band V	Left Edge	0	4183	836.6	24.0	23.91	102.09%	0.073	0.075	-
WCDMA Band V	Right Edge	0	4183	836.6	24.0	23.91	102.09%	0.014	0.014	-
2nd source spot-check	Back Surface	16	4183	836.6	24.0	23.91	102.09%	0.351	0.358	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

解析子方式就明・加報音音光性無利側成之体的理具(門時以体的理解性別人・各報音光を存立可管固定)・不可能切接線。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 www.sgs.com.tw

台灣檢驗科技股份有限公司



Page: 175 of 255

	D		PD PD		Distance		F	Max Rated Avg.	Measured		Averaged SAF	Rover 1g (W/kg)	
Mode	Bandwidth (MHz)	Modulation	RB RB Size start	Position	Distance (mm)	CH	Freq. (MHz)	Power + Max. Tolerance (dBm)	Avg. Power (dBm)	Scaling	Measured	Reported	Plot page
LTE Band 2 LTE Band 2 LTE Band 2			1 0	Back Surface Back Surface Back Surface	16 16 16	18700 18900 19100	1860 1880 1900	24.00 24.00 24.00	23.98 23.96 23.97	100.46% 100.93% 100.69%	0.828 0.755 0.739	0.832 0.762 0.744	
LTE Band 2 LTE Band 2 LTE Band 2			50 0 100RB 1 0	Back Surface Back Surface Top Edge	16 16 17	19100 18900 18700	1860 1880 1860	23.00 23.00 24.00	22.94 22.92 23.98	101.39% 101.86% 100.46% 101.39%	0.672 0.655 0.407 0.313	0.681 0.667 0.409 0.317	-
LTE Band 2 LTE Band 2 LTE Band 2	20MHz	QPSK	50 0 100RB	Top Edge Top Edge Bottom Edge	17 17 0	19100 18900 18700	1860 1880 1860	23.00 23.00 24.00	22.94 22.92 23.98	101.39% 101.86% 100.46%	0.313 0.299 0.013	0.317 0.305 0.013	-
LTE Band 2 LTE Band 2 LTE Band 2	201112	G OK	50 0 100RB	Bottom Edge Bottom Edge Left Edge	0	19100 18900 18700	1860 1880 1860	23.00 23.00 24.00	22.94 22.92 23.98	101.39% 101.86% 100.46%	0.011 0.008 0.051	0.011 0.009 0.051	-
LTE Band 2 LTE Band 2 LTE Band 2			50 0 100RB	Left Edge Left Edge Right Edge	0 0	19100 18900 18700	1860 1880 1860	23.00 23.00 24.00	22.94 22.92 23.98	101.39% 101.86% 100.46%	0.036 0.035 0.018	0.037 0.036 0.018	-
LTE Band 2 LTE Band 2			50 0 100RB	Right Edge Right Edge Back Surface	0 0 16	19100 18900 18700	1860 1880 1860	23.00 23.00 24.00	22.94 22.92 23.98	101.39% 101.86% 100.46%	0.014 0.011 0.783	0.014 0.011 0.787	-
repeated LTE Band 4	20MHz	QPSK	1 0	Back Surface Back Surface	16	18700 18700 20050	1860	24.00 24.00	23.98 23.97	100.46%	0.818	0.822	007
LTE Band 4 LTE Band 4			1 0	Back Surface Back Surface Back Surface	16 16	20175 20300 20050	1732.5 1745	24.00 24.00 23.00	23.89 23.91	102.57% 102.09%	0.477 0.481	0.489	-
LTE Band 4 LTE Band 4 LTE Band 4			100RB	Back Surface Top Edge	16 16 17	20050 20050	1720 1720 1720	23.00 24.00	22.91 22.90 23.97	102.09% 102.33% 100.69%	0.415 0.432 0.380	0.424 0.442 0.383	-
LTE Band 4 LTE Band 4 LTE Band 4	20MHz	QPSK	50 50 100RB	Top Edge Top Edge Bottom Edge	17 17 0	20050 20050 20050	1720 1720 1720	23.00 23.00 24.00	22.91 22.90 23.97	102.09% 102.33% 100.69%	0.309 0.315 0.024	0.315 0.322 0.024	
LTE Band 4 LTE Band 4 LTE Band 4	20111 2	G OK	50 50 100RB 1 0	Bottom Edge Bottom Edge Left Edge	0 0	20050 20050 20050	1720 1720 1720	23.00 23.00 24.00	22.91 22.90 23.97	102.09% 102.33% 100.69%	0.018 0.017 0.071	0.018 0.017 0.071	
LTE Band 4 LTE Band 4 LTE Band 4			50 50 100RB	Left Edge Left Edge Right Edge	0	20050 20050 20050	1720 1720 1720	23.00 23.00 24.00	22.91 22.90 23.97	102.09% 102.33% 100.69%	0.055 0.051 0.021	0.056 0.052 0.021	-
LTE Band 4 LTE Band 4			50 50 100RB	Right Edge Right Edge Back Surface	0 0 16	20050 20050 20050	1720 1720 1720	23.00 23.00 24.00	22.91 22.90 23.97	102.09% 102.33% 100.69%	0.017 0.017 0.492	0.017 0.017 0.495	-
LTE Band 5 LTE Band 5			1 0	Back Surface Back Surface	16	20450 20525	829 836.5	24.00 24.00	23.89	102.57%	0.197	0.202	- 008
LTE Band 5			1 0 1 0 25 0	Back Surface Back Surface Back Surface Back Surface	16 16	20525 20600 20600 20600	844 844	24.00 24.00 23.00 23.00	23.87 22.90	102.09% 103.04% 102.33% 103.99%	0.222 0.175	0.229 0.179	
LTE Band 5 LTE Band 5 LTE Band 5 LTE Band 5			1 0 25 0	Top Edge Top Edge	16 17 17	20525 20600	844 836.5 844	24.00 23.00	22.83 23.91 22.90	102.09% 102.33%	0.162 0.105 0.083	0.168 0.107 0.085	-
LTE Band 5 LTE Band 5 LTE Band 5	10MHz	QPSK	50RB 1 0 25 0	Top Edge Bottom Edge Bottom Edge Bottom Edge	17 0 0	20600 20525 20600	844 836.5 844	23.00 24.00 23.00	22.83 23.91 22.90	103.99% 102.09% 102.33%	0.081 0.029 0.020	0.084 0.030 0.020	-
LTE Band 5 LTE Band 5 LTE Band 5			50RB 1 0 25 0	Left Edge	0	20600 20525 20600	844 836.5 844	23.00 24.00 23.00	22.83 23.91 22.90	103.99% 102.09% 102.33%	0.020 0.075 0.067	0.021 0.077 0.069	-
LTE Band 5 LTE Band 5 LTE Band 5			50RB 1 0 25 0	Left Edge Right Edge Right Edge	0	20600 20525 20600	844 836.5 844	23.00 24.00 23.00	22.83 23.91 22.90	103.99% 102.09% 102.33%	0.061 0.014 0.011	0.063 0.014 0.011	-
LTE Band 5 2nd source spot-check			50RB	Right Edge Back Surface	0 16	20600 20525	844 844 836.5	23.00 24.00	22.83 23.91	102.33% 103.99% 102.09%	0.011 0.010 0.222	0.011 0.010 0.227	-
LTE Band 12 LTE Band 12 LTE Band 12			1 0 1 25 1 25	Back Surface Back Surface Back Surface	16 16	23060 23095 23130	704 707.5 711	24.00 24.00 24.00	23.12 23.11 23.09	122.46% 122.74% 123.31%	0.232 0.215 0.220	0.284 0.264 0.271	009
LTE Band 12 LTE Band 12 LTE Band 12 LTE Band 12			25 25 50RB	Back Surface Back Surface	16 16	23130 23060 23060	711 711 704 704	23.00 23.00 24.00	22.14	123.31% 121.90% 123.59%	0.220 0.143 0.121 0.097	0.271 0.174 0.150 0.119	
LTE Band 12 LTE Band 12			25 50 50RB	Top Edge Top Edge Top Edge	17 17	23130 23060	711 704	23.00 23.00	23.12 22.14 22.08	122.46% 121.90% 123.59%	0.076	0.093 0.095	•
LTE Band 12 LTE Band 12 LTE Band 12	10MHz	QPSK	1 0 25 50 50RB	Bottom Edge Bottom Edge Bottom Edge Left Edge	0	23060 23130 23060 23060	704 711 704 704	24.00 23.00 23.00	23.12 22.14 22.08 23.12	122.46% 121.90% 123.59% 122.46%	0.023 0.020 0.015 0.062	0.028 0.024 0.019 0.076	- : -
LTE Band 12 LTE Band 12 LTE Band 12			1 0 25 50 50RB	Left Edge Left Edge Left Edge	0 0	23060 23130 23060	704 711 704	24.00 23.00 23.00	23.12 22.14 22.08	122.46% 121.90% 123.59%	0.062 0.049 0.044	0.076 0.060 0.054	:
LTE Band 12 LTE Band 12 LTE Band 12			1 0 25 50 50RB	Right Edge Right Edge Right Edge	0	23060 23130 23060	704 711 704	24.00 23.00 23.00	23.12 22.14 22.08	122.46% 121.90% 123.59%	0.012 0.007 0.007	0.015 0.009 0.008	:
2nd source spot-check LTE Band 13			1 0	Back Surface Back Surface	16	23060 23230	704 782	24.00 24.00	23.12	122.46%	0.199	0.244	010
LTE Band 13 LTE Band 13 LTE Band 13			25 12 50RB 1 0	Back Surface Back Surface Top Edge	16 16	23230 23230 23230	782 782 782	23.00 23.00 24.00	22.25 22.24 23.31	118.85% 119.12% 117.22%	0.199 0.203 0.107	0.237 0.242 0.125	_:_
LTE Band 13 LTE Band 13 LTE Band 13			25 25 50RB	Top Edge Top Edge Bottom Edge	17 17	23230 23230 23230	782 782 782	23.00 23.00 24.00	22.25 22.24 23.31	118.85% 119.12% 117.22%	0.088 0.085 0.029	0.105 0.101 0.034	÷
LTE Band 13 LTE Band 13	10MHz	QPSK	25 25 50RB	Bottom Edge Bottom Edge	0	23230 23230	782 782	23.00 23.00	22.25 22.24	118.85% 119.12%	0.021	0.025 0.021	- :
LTE Band 13 LTE Band 13 LTE Band 13			1 0 25 25 50RB	Left Edge Left Edge Left Edge	0	23230 23230 23230	782 782 782	24.00 23.00 23.00	23.31 22.25 22.24	117.22% 118.85% 119.12%	0.070 0.053 0.049	0.082 0.063 0.058	
LTE Band 13 LTE Band 13 LTE Band 13			1 0 25 25 50RB	Right Edge Right Edge Right Edge	0	23230 23230 23230	782 782 782	24.00 23.00 23.00	23.31 22.25 22.24	117.22% 118.85% 119.12%	0.014 0.008 0.008	0.016 0.009 0.010	-
2nd source spot-check LTE Band 25			1 0	Back Surface Back Surface	16	23230 26140	782 1860	24.00 24.00	23.31	117.22%	0.227	0.266	-
LTE Band 25 LTE Band 25 LTE Band 25			1 0 1 0 50 50	Back Surface Back Surface Back Surface	16 16 16	26365 26590 26365	1882.5 1905 1882.5	24.00 24.00 23.00	23.15 23.09 22.08	121.62% 123.31% 123.59%	0.593 0.573 0.418	0.721 0.707 0.517	011 - -
LTE Band 25 LTE Band 25 LTE Band 25			100RB 1 0 50 50	Back Surface Top Edge Top Edge	16 17 17	26590 26365 26365	1905 1882.5 1882.5	23.00 24.00 23.00	22.08 23.15 22.08	123.59% 121.62% 123.59%	0.433 0.586 0.405	0.535 0.713 0.501	-
LTE Band 25 LTE Band 25 LTE Band 25 LTE Band 25	20MHz	QPSK	100RB 1 0 50 50	Top Edge Bottom Edge Bottom Edge	17 0 0	26590 26365 26365	1905 1882.5 1882.5	23.00 24.00 23.00	22.08 23.15 22.08	123.59% 121.62% 123.59%	0.399 0.011 0.007	0.493 0.013 0.009	-
LTE Band 25 LTE Band 25 LTE Band 25 LTE Band 25			100RB 1 0 50 50	Bottom Edge Left Edge Left Edge	0	26590 26365 26365	1905 1882.5 1882.5	23.00 24.00 23.00	22.08 23.15 22.08	123.59% 121.62% 123.59%	0.006 0.054 0.039	0.007 0.066 0.048	-
LTE Band 25 LTE Band 25			100RB 1 0 50 50	Left Edge Right Edge	0	26365 26365 26365 26365	1905 1882.5 1882.5	23.00 23.00 24.00 23.00	22.08 22.08 23.15 22.08	123.59%	0.034	0.042	
LTE Band 25 LTE Band 25 2nd source spot-check			100RB	Right Edge Right Edge Back Surface	0 16	26590 26365	1905 1882.5	23.00 23.00 24.00	22.08 22.08 23.15	123.59% 123.59% 121.62%	0.012 0.010 0.570	0.015 0.012 0.693	-
LTE Band 26 FCC LTE Band 26 FCC			1 0 1 0	Back Surface Back Surface	16 16	26765 26865	821.5 831.5	24.00 24.00	23.38 23.41	115.35% 114.55%	0.226 0.247	0.261 0.283	012
LTE Band 26 FCC LTE Band 26 FCC LTE Band 26 FCC			1 0 36 18 75RB	Back Surface Back Surface Back Surface	16 16 16	26965 26865 26865	841.5 831.5 831.5	24.00 23.00 23.00	23.27 22.34 22.21	118.30% 116.41% 119.95%	0.231 0.212 0.203	0.273 0.247 0.243	1
LTE Band 26 FCC LTE Band 26 FCC LTE Band 26 FCC			1 0 36 25 75RB	Top Edge Top Edge Top Edge	17 17 17	26865 26865 26865	831.5 831.5 831.5	24.00 23.00 23.00	23.41 22.34 22.21	114.55% 116.41% 119.95%	0.098 0.077 0.074	0.112 0.090 0.089	
LTE Band 26 FCC LTE Band 26 FCC LTE Band 26 FCC	15MHz	QPSK	1 0 36 25 75RB	Bottom Edge Bottom Edge Bottom Edge	0	26865 26865 26865	831.5 831.5 831.5	24.00 23.00 23.00	23.41 22.34 22.21	114.55% 116.41% 119.95%	0.024 0.017 0.018	0.027 0.020 0.022	
LTE Band 26 FCC LTE Band 26 FCC LTE Band 26 FCC			1 0 36 25 75RB	Left Edge Left Edge Left Edge	0 0	26865 26865 26865	831.5 831.5 831.5 831.5	24.00 23.00 23.00	22.21 23.41 22.34 22.21	114.55% 116.41% 119.95%	0.045 0.038 0.036	0.052 0.044 0.043	
LTE Band 26 FCC LTE Band 26 FCC			1 0 36 25	Right Edge Right Edge	0	26865 26865	831.5 831.5	24.00 23.00	23.41 22.34	114.55% 116.41%	0.013	0.015 0.011	1:
LTE Band 26 FCC 2nd source spot-check LTE Band 66			1 0	Right Edge Back Surface Back Surface	16	26865 26865 132072	831.5 831.5 1720	23.00 24.00 24.00	22.21 23.41 22.68	119.95% 114.55% 135.52%	0.008 0.231 0.511	0.010 0.265 0.693	
LTE Band 66 LTE Band 66			1 0	Back Surface Back Surface	16 16	132322 132572	1745 1770	24.00 24.00	23.12 22.59	122.46% 138.36%	0.574	0.703 0.695	013
LTE Band 66 LTE Band 66 LTE Band 66			50 50 100RB 1 0 50 50	Back Surface Back Surface Top Edge	16 16 17	132322 132322 132322 132322	1745 1745 1745 1745	23.00 23.00 24.00 23.00	22.09 22.05 23.12 22.09	123.31% 124.45% 122.46% 123.31%	0.501 0.508 0.415 0.366	0.618 0.632 0.508 0.451	-
LTE Band 66 LTE Band 66 LTE Band 66	20MHz	QPSK	50 50 100RB	Top Edge Top Edge Bottom Edge	17 17 0	132322 132322	1745 1745	23.00 24.00	22.05 23.12	124.45% 122.46%	0.352	0.438 0.032	-
LTE Band 66 LTE Band 66 LTE Band 66	AUMPL		50 50 100RB	Bottom Edge Bottom Edge Left Edge	0	132322 132322 132322	1745 1745 1745	23.00 23.00 24.00	22.09 22.05 23.12	123.31% 124.45% 122.46%	0.020 0.019 0.077	0.025 0.024 0.094	
LTE Band 66 LTE Band 66 LTE Band 66 LTE Band 66			50 50 100RB	Left Edge Left Edge Right Edge	0	132322 132322 132322	1745 1745 1745	23.00 23.00 24.00	22.09 22.06 23.12	123.31% 124.45% 122.46%	0.061 0.066 0.020	0.075 0.082 0.024	-
LTE Band 66 LTE Band 66 LTE Band 66			1 0 50 50 100RB	Right Edge Right Edge	0	132322 132322	1745 1745	23.00 23.00	22.09 22.05	123.31% 124.45%	0.014	0.017	-
2nd source spot-check	4 -4	4 la a l	oialboot C	Back Surface	16	132322	1745	24.00	23.12	122.46%	0.560	0.686	ECC 4

^{* -} repeated at the highest SAR measurement according to the KDB 865664 D01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issued defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 176 of 255

sensor off Ant2

Mode LTE Band 7 LTE Band 8 LTE Band 8 LTE Band 80 LTE Band 30	(MH12)	Modulation OPSK	1 50 100 1 100 1 1 100 1 1 1 1 1 1 1 50 100 1 100 1 1 1 1	Start	Position Back Surface Top Edge Top Edge Top Edge Bottom Edge Left Edge Left Edge Right Edge Right Edge Back Surface	(mm) 12 12 12 12 12 12 13 13 13 0 0 0 0 0 12 12 12 12 13 13 13 13 13 13 13 13 13 13 13 13 13	CH 20850 21150 21150 20850	(MHz) 2510 2535 2550 2560 2510 2510 2510 2510 2510 2510 2510 251	Power + Max. Tolerance (dfm) 24.00 24.00 24.00 24.00 23.00 23.00 24.00 23.00 24.00 23.00 24.00 23.00 24.00 23.00 24.00 23.00 24.00 23.00 24.00 23.00 24.00 23.00 24.00 23.00 24.00 23.00 24.00 23.00 24.00 23.00 24.00 23.00	Arg, Power (dBm) (dBm) (dBm) (dBm) (23.77 23.64 23.56 22.50 22.49 23.77 22.50 22.49 23.77 22.50 22.49 23.77 22.50 22.49 23.77 22.50 22.49 23.77 22.50 22.49 23.77 22.50 22.49 23.77 22.50 22.49 23.77 22.50 22.49 23.77 22.50 22.49 23.77 22.50 22.49 23.77 22.50 22.49 23.77 22.50 22.49 23.77 22.50 22.49 23.77	Scaling 105.44% 108.64% 110.15% 111.20% 112.20% 112.46% 105.44% 112.20% 112.46% 112.20% 112.46% 112.20% 112.46% 112.20% 112.46% 112.20% 112.46% 112.20% 112.46% 112.20% 112.46% 112.20% 112.46% 112.20% 112.46%	Measured 0.726 0.726 0.887 0.887 0.818 0.803 0.819 0.227 0.270 0.222 0.018 0.017 0.007 0.008 0.072 0.075 0.008 0.025 0.028	Reported 0.765 0.765 0.759 0.757 0.678 0.678 0.336 0.331 0.023 0.020 0.099 0.099 0.091 0.097 0.097 0.097 0.097	Piot page 014
LTE Bard 7 LTE Bard 8 LTE Bard 88 LTE Bard 98	20MHz	QPSK	100 1 1 50 100 1 100 1 1 50 1 100 1 1 50 1 1 100 1 1 1 1 1 1 1 50	0 0 50 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Back Surface Back Surface Back Surface Back Surface Back Surface Back Surface Top Edge Top Edge Top Edge Bottom Edge Bottom Edge Bottom Edge Left Edge Left Edge Left Edge Right Edge Right Edge Back Surface Back Surface Back Surface Back Surface Back Surface	12 12 12 12 13 13 13 13 0 0 0 0 0 0 0 0 0 0 0 12 12 13 13 13 13 0 0 0 0 0 0 0 0 0 1 1 1 1 1	21100 21350 20850	2535 2560 2510 2510 2510 2510 2510 2510 2510 251	24.00 24.00 23.00 23.00 23.00 24.00 23.00 24.00 23.00 24.00 23.00 23.00 24.00 23.00 24.00 23.00 23.00 23.00 23.00 23.00 23.00	23.64 23.58 22.50 22.49 23.77 22.50 22.49 23.77 22.50 22.49 23.77 22.50 22.49 23.77 22.50 22.49 23.77 22.50 22.49	108.64% 110.15% 112.20% 112.46% 112.20% 112.46% 112.20% 112.20% 112.20% 112.20% 112.20% 112.20% 112.20% 112.20% 112.20% 112.20% 112.20% 112.46% 112.20% 112.46% 112.20% 112.46% 112.20% 112.46%	0.899 0.887 0.616 0.003 0.319 0.277 0.280 0.022 0.018 0.017 0.008 0.072 0.070 0.035 0.025	0.759 0.757 0.891 0.678 0.336 0.311 0.315 0.023 0.020 0.019 0.093 0.081 0.037 0.037	
LTE Band 7 LTE Band 8 LTE Band 8 LTE Band 88 LTE Band	20MHz	QPSK	100 1 1 50 100 1 100 1 1 50 1 100 1 1 50 1 1 100 1 1 1 1 1 1 1 50	0 50 ORB 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Back Surface Back Surface Back Surface Back Surface Back Surface Top Edge Top Edge Top Edge Top Edge Bottom Edge Bottom Edge Bottom Edge Bottom Edge Left Edge Left Edge Left Edge Right Edge Right Edge Right Edge Right Edge Back Surface Back Surface Back Surface Back Surface Back Surface	12 12 12 13 13 13 13 0 0 0 0 0 0 0 0 0 0 0 0 0 0	21350 20850	2580 2510 2510 2510 2510 2510 2510 2510 251	24.00 23.00 23.00 24.00 23.00 23.00 23.00 24.00 23.00 24.00 24.00 23.00 24.00 23.00 24.00 23.00 23.00 23.00	23.58 22.50 22.49 23.77 22.50 22.49 23.77 22.50 22.49 23.77 22.50 22.49 23.77 22.50 22.49 23.77 22.50 22.49	110.15% 112.20% 112.20% 105.44% 112.20% 112.20% 112.20% 112.20% 112.20% 112.46% 105.44% 112.46% 105.44% 112.46% 112.46% 112.46% 112.46% 112.46% 112.46% 112.46% 112.46% 112.46%	0.887 0.616 0.603 0.319 0.277 0.280 0.022 0.018 0.017 0.088 0.072 0.070 0.035 0.028	0.757 0.691 0.678 0.336 0.311 0.315 0.023 0.020 0.019 0.093 0.081 0.079 0.037 0.037	
LTE Band 7 LTE Band 8 LTE Band 8 LTE Band 88	20MHz	QPSK	100 1 1 50 100 1 100 1 1 50 1 100 1 1 50 1 1 100 1 1 1 1 1 1 1 50	0 ORB 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Back Surface Back Surface Top Edge Top Edge Top Edge Top Edge Bottom Edge Bottom Edge Bottom Edge Bottom Edge Left Edge Left Edge Left Edge Right Edge Right Edge Black Surface Black Surface Black Surface Black Surface Black Surface	12 12 13 13 13 0 0 0 0 0 0 0 0 0 0 0 12 12	20850 30850 30850	2510 2510 2510 2510 2510 2510 2510 2510	23.00 23.00 24.00 23.00 23.00 24.00 23.00 24.00 23.00 24.00 23.00 24.00 23.00 24.00 23.00 23.00 23.00	22.50 22.49 23.77 22.50 22.49 23.77 22.50 22.49 23.77 22.50 22.49 23.77 22.50 22.49 23.77 22.50 22.49	112.20% 112.46% 105.44% 112.20% 112.20% 112.46% 105.44% 112.20% 105.44% 112.20% 105.44% 112.20% 112.20% 112.20%	0.616 0.603 0.319 0.277 0.280 0.022 0.018 0.017 0.088 0.072 0.070 0.035 0.028	0.891 0.678 0.336 0.311 0.315 0.023 0.020 0.019 0.093 0.081 0.079 0.037 0.031	
LTE Bard 7 LTE Bard 8 LTE Bard 8 LTE Bard 8 LTE Bard 88 LTE Bard 88 LTE Bard 38 LTE Bar	20MHz	OPSK	100 1 1 50 100 1 100 1 1 50 1 100 1 1 50 1 1 100 1 1 1 1 1 1 1 50	ORB 0 0 50 ORB 0 0 0 ORB 0 O	Back Surface Top Edge Top Edge Top Edge Top Edge Top Edge Top Edge Bottom Edge Bottom Edge Bottom Edge Bottom Edge Left Edge Left Edge Left Edge Right Edge Right Edge Right Edge Back Surface Back Surface Back Surface Back Surface	12 13 13 13 13 0 0 0 0 0 0 0 0 0 0 0 0 0 12 12 12 12	20850 20850	2510 2510 2510 2510 2510 2510 2510 2510	23.00 24.00 23.00 23.00 23.00 24.00 23.00 24.00 23.00 24.00 23.00 24.00 23.00 24.00 23.00 24.00	22.49 23.77 22.50 22.49 23.77 22.50 22.49 23.77 22.50 22.49 23.77 22.50 22.49 23.77 22.50	112.46% 105.44% 112.20% 112.46% 105.44% 112.20% 112.46% 105.44% 112.20% 112.46% 105.44% 112.20% 112.46% 112.20%	0.603 0.319 0.277 0.280 0.022 0.018 0.017 0.088 0.072 0.070 0.035 0.028	0.878 0.336 0.311 0.315 0.023 0.020 0.019 0.093 0.081 0.079 0.037 0.031 0.028	
LTE Band 7 LTE Band 8 LTE Band 8 LTE Band 88 LTE Band 38 LTE B	20MHz	QPSK	1 50 100 1 100 1 1 100 1 1 1 1 1 1 1 50 100 1 100 1 1 1 1	0 50 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Top Edge Top Edge Top Edge Bottom Edge Bottom Edge Bottom Edge Bottom Edge Left Edge Left Edge Left Edge Right Edge Right Edge Right Edge Back Surface Back Surface Back Surface Back Surface	13 13 13 0 0 0 0 0 0 0 0 0 0 0 12 12	20850 20850	2510 2510 2510 2510 2510 2510 2510 2510	24.00 23.00 24.00 23.00 24.00 23.00 24.00 23.00 24.00 23.00 24.00 23.00 24.00 23.00 24.00	23.77 22.50 22.49 23.77 22.50 22.49 23.77 22.50 22.49 23.77 22.50 22.49 23.77 22.50	105.44% 112.20% 112.46% 105.44% 112.20% 112.46% 105.44% 105.44% 112.20% 112.46% 105.44% 105.44%	0.319 0.277 0.280 0.022 0.018 0.017 0.088 0.072 0.070 0.035 0.028	0.336 0.311 0.315 0.023 0.020 0.019 0.093 0.081 0.079 0.037 0.031	
LTE Band 7 LTE Band 30	20MHz	QPSK	100 1 1 50 100 1 1 50 1 100 1 1 50 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	50 ORB 0 0 0 0 0 0 0 25	Top Edge Top Edge Bottom Edge Bottom Edge Bottom Edge Bottom Edge Left Edge Left Edge Left Edge Left Edge Right Edge Right Edge Back Surface Back Surface Back Surface Back Surface	13 13 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 1 2 1 2 1	20850 20850 20850 20850 20850 20850 20850 20850 20850 20850 20850 20850 20850 3850 3850	2510 2510 2510 2510 2510 2510 2510 2510	23.00 23.00 24.00 23.00 23.00 24.00 23.00 23.00 24.00 24.00 23.00 23.00 23.00 23.00	22.50 22.49 23.77 22.50 22.49 23.77 22.50 22.49 23.77 22.50 22.49 23.77 22.50	112.20% 112.46% 105.44% 112.20% 112.46% 105.44% 112.20% 112.46% 105.44% 112.20% 112.46%	0.277 0.280 0.022 0.018 0.017 0.088 0.072 0.070 0.035 0.028	0.311 0.315 0.023 0.020 0.019 0.093 0.081 0.079 0.037 0.031	
LTE Band 7 LTE Band 8 LTE Band 8 LTE Band 8 LTE Band 88 LTE Band 38 L	20MHz	QPSK	100 1 1 50 100 1 1 50 1 100 1 1 50 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	ORB 0 0 50 ORB 0 0 50 ORB 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Top Edge Bottom Edge Bottom Edge Bottom Edge Bottom Edge Left Edge Left Edge Left Edge Right Edge Right Edge Back Surface Back Surface Back Surface Back Surface	13 0 0 0 0 0 0 0 0 0 0 0 0 12 12	20850 20850 20850 20850 20850 20850 20850 20850 20850 20850 20850 20850 20850 3850	2510 2510 2510 2510 2510 2510 2510 2510	23.00 24.00 23.00 23.00 24.00 23.00 23.00 24.00 23.00 23.00 23.00	22.49 23.77 22.50 22.49 23.77 22.50 22.49 23.77 22.50 22.49 23.77 22.50 22.49	112.46% 105.44% 112.20% 112.46% 105.44% 112.20% 112.46% 105.44% 112.20% 112.20%	0.280 0.022 0.018 0.017 0.088 0.072 0.070 0.035 0.028 0.025	0.315 0.023 0.020 0.019 0.093 0.081 0.079 0.037 0.031 0.028	
LTE Band 7 LTE Band 9 LTE Band 9 LTE Band 98	20MHz	QPSK	1 50 100 1 100 1 1 1 1 1 1 1 50 100 100	0 50 PRB 5	Bottom Edge Bottom Edge Bottom Edge Left Edge Left Edge Left Edge Right Edge Right Edge Right Edge Back Surface Back Surface Back Surface Back Surface	0 0 0 0 0 0 0 0 0 0 0 12 12	20850 20850 20850 20850 20850 20850 20850 20850 20850 20850 20850 37850 38000	2510 2510 2510 2510 2510 2510 2510 2510	24.00 23.00 23.00 24.00 23.00 23.00 24.00 23.00 23.00 23.00	23.77 22.50 22.49 23.77 22.50 22.49 23.77 22.50 22.49	105.44% 112.20% 112.46% 105.44% 112.20% 112.46% 105.44% 112.20% 112.46%	0.022 0.018 0.017 0.088 0.072 0.070 0.035 0.028 0.025	0.023 0.020 0.019 0.093 0.081 0.079 0.037 0.031	
LTE Band 7 LTE Band 8 LTE Band 8 LTE Band 38	20MHz	QPSK	100 1 50 100 1 50 1 100 1 1 1 1 1 1 1 50	50 ORB 0 50 ORB 0 50 ORB 0 50 ORB 0 0 0 0 0 25	Bottom Edge Bottom Edge Left Edge Left Edge Left Edge Right Edge Right Edge Right Edge Back Surface Back Surface Back Surface Back Surface	0 0 0 0 0 0 0 0 12 12 12 12	20850 20850 20850 20850 20850 20850 20850 20850 20850 20850 37850 38000	2510 2510 2510 2510 2510 2510 2510 2510	23.00 23.00 24.00 23.00 23.00 24.00 23.00 23.00 23.00	22.50 22.49 23.77 22.50 22.49 23.77 22.50 22.49	112.20% 112.46% 105.44% 112.20% 112.46% 105.44% 112.20% 112.46%	0.018 0.017 0.088 0.072 0.070 0.035 0.028	0.020 0.019 0.093 0.081 0.079 0.037 0.031	
LTE Band 7 LTE Band 18 LTE Band 38			1 50 100 1 1 1 1 1 1 50 1 1 1 50	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Left Edge Left Edge Right Edge Right Edge Right Edge Right Edge Right Edge Back Surface Back Surface Back Surface Back Surface Back Surface	0 0 0 0 0 0 0 12 12 12	20850 20850 20850 20850 20850 20850 20850 20850 37850 38000	2510 2510 2510 2510 2510 2510 2510 2510	24.00 23.00 23.00 24.00 23.00 23.00 23.00	23.77 22.50 22.49 23.77 22.50 22.49	105.44% 112.20% 112.46% 105.44% 112.20% 112.46%	0.088 0.072 0.070 0.035 0.028 0.025	0.093 0.081 0.079 0.037 0.031 0.028	
LTE Bard 7 LTE Bard 37 LTE Bard 38			100 1 1 50 100 1 1 1 1 1 50	50 ORB 0 50 ORB 0 50 ORB 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Left Edge Left Edge Right Edge Right Edge Right Edge Right Edge Back Surface Back Surface Back Surface Back Surface	0 0 0 0 0 0 12	20850 20850 20850 20850 20850 20850 20850 37850 38000	2510 2510 2510 2510 2510 2510 2510 2510	23.00 23.00 24.00 23.00 23.00 23.00	22.50 22.49 23.77 22.50 22.49	112.20% 112.46% 105.44% 112.20% 112.46%	0.072 0.070 0.035 0.028 0.025	0.081 0.079 0.037 0.031 0.028	
LTE Band 7 LTE Band 8 LTE Band 88 LTE Band 38			100 1 1 50 100 1 1 1 1 1 50	00RB 0 50 00RB 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Left Edge Right Edge Right Edge Right Edge Right Edge Back Surface Back Surface Back Surface Back Surface Back Surface	0 0 0 0 0 12 12 12 12	20850 20850 20850 20850 20850 20850 37850 38000	2510 2510 2510 2510 2510 2510 2580	23.00 24.00 23.00 23.00	22.49 23.77 22.50 22.49	112.46% 105.44% 112.20% 112.46%	0.070 0.035 0.028 0.025	0.079 0.037 0.031 0.028	
LTE Band 7 LTE Band 37 LTE Band 38			1 50 100 1 1 1 1 1 1 50 1 1 1 50 1 1 1 1	0 50 0RB 0 0 0 0 0	Right Edge Right Edge Right Edge Back Surface Back Surface Back Surface Back Surface Back Surface	0 0 0 12 12 12 12	20850 20850 20850 20850 20850 37850 38000	2510 2510 2510 2510 2510 2580	24.00 23.00 23.00	23.77 22.50 22.49	105.44% 112.20% 112.46%	0.035 0.028 0.025	0.037 0.031 0.028	
LITE Band 7 LITE Band 7 LITE Band 7 LITE Band 8 LITE Band 88			1 1 1 1 1 50	50 ORB 0 0 0 0 0 25	Right Edge Right Edge Back Surface Back Surface Back Surface Back Surface Back Surface	0 0 12 12 12 12	20850 20850 20850 37850 38000	2510 2510 2510 2510	23.00 23.00	22.50 22.49	112.20% 112.46%	0.028 0.025	0.031 0.028	·
LTE Board 7 Zer Source speciations. LTE Board 38			1 1 1 1 1 50	0 0 0 0 0 0 25	Right Edge Back Surface Back Surface Back Surface Back Surface Back Surface	12 12 12 12 12	20850 20850 37850 38000	2510 2510 2580	23.00	22.49	112.46%	0.025	0.028	
Zrid Source gold-check LTE Band 38			1 1 1 1 1 50	0 0 0 0 25	Back Surface Back Surface Back Surface Back Surface	12 12 12 12	20850 37850 38000	2510 2580						
LTE Band 38			1 50	0 0 0 0 25	Back Surface Back Surface Back Surface	12 12 12	37850 38000	2580	24.00	23.77	105.44%	0.701		
LTE Band 38			1 50	0 0 25	Back Surface Back Surface	12 12	38000						0.739	
LTE Band 38			1 50	0 0 25	Back Surface Back Surface	12 12	38000		24.00	23.66	108.14%	0.400	0.433	045
LTE Bard 38			1 50	0 25	Back Surface	12			24.00	23.66	108.14%	0.400	0.433	015
LTE Bard 38				25				2610	24.00	23.56	110.66%	0.362	0.425	
LTE Band 38						12	37850	2580	24.00	23.50	112.20%	0.362	0.401	-
LTE Band 38			4		Back Surface	12	38000	2595	23.00	22.54	111.17%	0.325	0.361	-
LTE Band 38 LTE Band 38 LTE Band 38 LTE Band 38 LTE Band 38 LTE Band 38 LTE Band 38				0	Top Edge	13	37850	2580	24.00	23.66	108.14%	0.172	0.186	-
LTE Band 38 LTE Band 38 LTE Band 38 LTE Band 38 LTE Band 38 LTE Band 38			50	25	Top Edge	13	37850	2580	23.00	22.50	112.20%	0.144	0.162	
LTE Band 38 LTE Band 38 LTE Band 38 LTE Band 38 LTE Band 38				0RB	Top Edge	13	38000	2595	23.00	22.54	111.17%	0.142	0.158	
LTE Band 38 LTE Band 38 LTE Band 38		QPSK	1	0	Bottom Edge	0	37850	2580	24.00	23.66	108.14%	0.004	0.004	-
LTE Band 38 LTE Band 38	20MHz	QPSK	50	25	Bottom Edge	0	37850	2580	23.00	22.50	112.20%	0.002	0.002	
LTE Band 38			100	0RB	Bottom Edge	0	38000	2595	23.00	22.54	111.17%	0.003	0.004	
			1	0	Left Edge	0	37850	2580	24.00	23.66	108.14%	0.068	0.074	
LTE Band 38			50	25	Left Edge	0	37850	2580	23.00	22.50	112.20%	0.059	0.066	
			100	0RB	Left Edge	0	38000	2595	23.00	22.54	111.17%	0.055	0.061	
LTE Band 38			1	0	Right Edge	0	37850	2580	24.00	23.66	108.14%	0.045	0.049	
LTE Band 38			50	25	Right Edge	0	37850	2580	23.00	22.50	112.20%	0.037	0.042	
LTE Band 38				0RB	Right Edge	0	38000	2595	23.00	22.54	111.17%	0.038	0.042	-
2nd source spot-check			1	0	Back Surface	12	37850	2580	24.00	23.66	108.14%	0.382	0.413	
LTE Band 41				0	Back Surface	12	39750	2506	24.00	23.79	104.95%	0.398	0.418	-
LTE Band 41			1	50	Back Surface	12	40185	2549.5	24.00	23.79	104.95%	0.398	0.463	-
LTE Band 41			1	0	Back Surface	12	40185	2549.5	24.00	23.87	103.99%	0.445	0.488	016
LTE Band 41			1	0	Back Surface	12	41055	2636.5	24.00	23.85	103.51%	0.461	0.400	- 010
LTE Band 41			1	Ö	Back Surface	12	41490	2680	24.00	23.81	104.47%	0.438	0.458	
LTE Band 41			50	25	Back Surface	12	40185	2549.5	23.00	22.85	103.51%	0.359	0.372	-
LTE Band 41				0RB	Back Surface	12	40185	2549.5	23.00	22.79	104.95%	0.377	0.396	
LTE Band 41			1	0	Top Edge	13	40620	2593	24.00	23.87	103.04%	0.202	0.208	
LTE Band 41			50	25	Top Edge	13	40185	2549.5	23.00	22.85	103.51%	0.169	0.175	
LTE Band 41	20MHz	OPSK	100	0RB	Top Edge	13	40185	2549.5	23.00	22.79	104.95%	0.164	0.172	
LTE Band 41	ZUMFIZ	ur an	1	0	Bottom Edge	0	40620	2593	24.00	23.87	103.04%	0.007	0.008	
LTE Band 41	\ .		50	25	Bottom Edge	0	40185	2549.5	23.00	22.85	103.51%	0.004	0.005	
LTE Band 41			100	ORB	Bottom Edge	0	40185	2549.5	23.00	22.79	104.95%	0.005	0.005	
LTE Band 41			1	0	Left Edge	0	40620	2593	24.00	23.87	103.04%	0.072	0.074	
LTE Band 41			50	25	Left Edge	0	40185	2549.5	23.00	22.85	103.51%	0.061	0.063	
LTE Band 41			100	ORB	Left Edge	0	40185	2549.5	23.00	22.79	104.95%	0.060	0.063	
LTE Band 41				0	Right Edge	0	40620	2593	24.00	23.87	103.04%	0.061	0.063	
					Right Edge	0	40185	2549.5	23.00	22.85	103.51%	0.048	0.050	
LTE Band 41 LTE Band 41			50	25 ORB	Right Edge	0	40185	2549.5 2549.5	23.00				0.046	

sensor on Ant1

0011001 011 <u></u> / 1111	•									
Band	Position	Distance	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling		SAR over 1g /kg)	Plot page
band	Position	(mm)	Cn	(MHz)	Tolerance (dBm)	(dBm)	Scaling	Measured	Reported	Plot page
GPRS850<1Dn4Up>	Back Surface	0	128	824.2	23.0	21.75	133.35%	0.572	0.763	-
GPRS850<1Dn4Up>	Back Surface	0	190	836.6	23.0	21.83	130.92%	0.590	0.772	017
GPRS850<1Dn4Up>	Back Surface	0	251	848.8	23.0	21.81	131.52%	0.566	0.744	-
GPRS850<1Dn4Up>	Top Edge	0	190	836.6	23.0	21.83	130.92%	0.224	0.293	-
2nd source spot-check	Back Surface	0	190	836.6	23.0	21.83	130.92%	0.553	0.724	-
GPRS1900<1Dn4Up>	Back Surface	0	512	1850.2	16.5	16.22	106.66%	0.609	0.650	018
GPRS1900<1Dn4Up>	Back Surface	0	661	1880	16.5	16.17	107.89%	0.585	0.631	-
GPRS1900<1Dn4Up>	Back Surface	0	810	1909.8	16.5	16.20	107.15%	0.601	0.644	-
GPRS1900<1Dn4Up>	Top Edge	0	512	1850.2	16.5	16.22	106.66%	0.564	0.602	-
2nd source spot-check	Back Surface	0	512	1850.2	16.5	16.22	106.66%	0.571	0.609	-

Band	Position	Distance	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling		SAR over 1g /kg)	Plot page
banu	Position	(mm)	On	(MHz)	Tolerance (dBm)	(dBm)	Scaling	Measured	Reported	riot page
WCDMA Band II	Back Surface	0	9262	1852.4	13.0	12.94	101.39%	0.654	0.663	019
WCDMA Band II	Back Surface	0	9400	1880	13.0	12.84	103.75%	0.619	0.642	
WCDMA Band II	Back Surface	0	9538	1907.6	13.0	12.85	103.51%	0.582	0.602	\ -
WCDMA Band II	Top Edge	0	9262	1852.4	13.0	12.94	101.39%	0.627	0.636	
2nd source spot-check	Back Surface	0	9262	1852.4	13.0	12.94	101.39%	0.598	0.606	-
WCDMA Band IV	Back Surface	0	1312	1712.4	10.5	10.03	111.43%	0.341	0.380	
WCDMA Band IV	Back Surface	0	1412	1732.4	10.5	10.07	110.41%	0.332	0.367	
WCDMA Band IV	Back Surface	0	1513	1752.6	10.5	10.08	110.15%	0.362	0.399	020
WCDMA Band IV	Top Edge	0	1513	1752.6	10.5	10.08	110.15%	0.322	0.355	-
2nd source spot-check	Back Surface	0	1513	1752.6	10.5	10.08	110.15%	0.336	0.370	
WCDMA Band V	Back Surface	0	4132	826.4	18.5	18.01	111.94%	0.530	0.593	-
WCDMA Band V	Back Surface	0	4183	836.6	18.5	18.02	111.69%	0.512	0.572	-
WCDMA Band V	Back Surface	0	4233	846.6	18.5	18.07	110.41%	0.547	0.604	021
WCDMA Band V	Top Edge	0	4233	846.6	18.5	18.07	110.41%	0.259	0.286	-
2nd source spot-check	Back Surface	0	4233	846.6	18.5	18.07	110.41%	0.517	0.571	-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

解非分月説明・江東古台未惟育測貳之様品買真「同時比様品惟保留別人。本報告未經本公司書面計可,不可部份復製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

**SCST STATES OF A TABLE TO A TRANSITE OF A TABLE TO A TRANSITE OF A TRANS

f (886-2) 2298-0488



Page: 177 of 255

Moc. March													Averaged SAI	R over 1g (W/kg)	
1	Mode		Modulation		RB start	Position		СН				Scaling		Reported	Plot page
1.1 0 Residence 2 1902 1905 19	TE Band 2			1	0	Rank Surface	0	18700	1860	13.50	12.46	127.08%		'	_
1 2 Bab Arbert 2 1900 190				i	0			18900	1880	13.50	12.66	121.34%	0.587	0.712	022
Color Colo	TE Band 2			1	0	Back Surface	0			13.50				0.684	
1 2 Triple 2 1500	TE Band 2			50	0	Back Surface	0	18900	1860	13.50	12.54	124.74%	0.531	0.662	
Column C		20MHz	QPSK	100								125.60%		0.693	
1.5 1.5														0.671	
The control of the														0.639	
The Second The Company T	TE Band 2							18700						0.664	
Color	ource spot-check			1	0	Back Surface		18900	1880	13.50	12.66	121.34%	0.557	0.676	
A. Based Color C	TE Road 4			- 1		Dook Curfoso	0	20050	1720	14.00	12.02	101 969/	1.000	1 100	023
1.15 Bard 1.15 9 80 80 100 1	TF Band 4			1		Back Surface		20175	1732.5		13.89			0.960	020
175 Bend	TE Band 4			1		Back Surface		20300	1745	14.00	13.79	104.95%	1.020	1.071	
Chemical Color C	TE Band 4			50	25	Back Surface		20050	1720	14.00	13.78	105.20%	0.988	1.039	
11 Sept 1 10 10 10 10 10 10 10					0	Back Surface	0							1.004	
Vit Band						Back Surface								0.986	
Till Band														1.058	
T. F. Bard		20MHz	QPSK											0.953	
VER Bend 4 50 27 You follow 0 20000 1700 1400 1374 1400 1	TE Band 4														
CTE Bend 1 100 0 70 tr Egy 0 20175 17215 1420 1377 15445 0.979 0.00							0							0.944	-
THE Benefit Company of the Company o	TE Band 4						0			14.00					<u> </u>
THE Bend 1 2009	TE Band 4							20300	1745	14.00			0.678	0.927	-
1 0 Bas Suffices 0 20000 1720 1400 1392 1018/8 972 308 308 308 308 308 308 308 308 309		l												0.946	
	ource spot-check			1										0.990	
TIT Bard 5	repeated	20MHz	QPSK	1										1.070	
TE Bard 1															
THE Bard S														0.877	024
THE Bases 10MeV CPSK 5000 Bases Service 0 2000 844 2010 19.35 118.14% 0.694 0.77														0.838	-
LTE Bard 5														0.827	-
LTR Bard 5														0.736	-
LTE Band 5	TE Band 5	10MHZ	QPSK	50		Back Surface				20.00	19.28				
Company Comp				1											
The bases speciment The Board Surface The Surface															
THE Band 12															
LTE Band 12 1 0 Back Surface 0 23006 707.5 21.50 21.33 103.99% 1,000 11.50 1.15	and sportings					Duck Curioc		20400	020	20.00	10.44	110.70%	0.070	0.700	
1 0 Back Surface 0 23130 711 2150 2134 10375% 1000 105	TE Band 12			1	0	Back Surface	0	23060	704	21.50	21.44	101.39%	1.170	1.186	025
LTE Bard 12 10MHz	TE Band 12			1	0	Back Surface	0	23095	707.5	21.50	21.33	103.99%	1.100	1.144	
LTE Bard 12 CPSK 25 25 Back Surface 0 23995 7775 2150 2122 10641% 1010 107														1.058	
LTE Band 12 10MHz														1.039	
LTE Bard 12 1				25	25			23095	707.5		21.23	106.41%		1.075	
TE Band 12		10MHz	QPSK					23130			21.30	104.71%		1.068	
LTE Band 12 LTE Band 13 LTE Band 25 LTE Band 26 LTE Ba				50	RB										
TE Band 12 10MHz				1	0									0.733	
Television Tel															
TE Bard 13	IE Band 12														
TE Band 13	reneated	10MHz	OPSK											1.136	- :
LTE Band 25 LTE Ba							-								
CPSK 1	TE Band 13			1	0	Back Surface	0	23230	782	21.50	21.50	100.00%	1.120	1.120	026
LTE Band 13 10MHz GPSK 1	TE Band 13			25				23230	782	21.50	21.43	101.62%	1.070	1.087	
LTE Band 13 25				50			0	23230	782	21.50	21.27	105.44%	1.050	1.107	
SORB Top Edge 0 22/300 782 21/50 21/27 100.44% 0.811 0.85		10MHz	QPSK	1				23230	782	21.50	21.50	100.00%	0.861	0.861	
1 0 Bank Surface 0 22220 782 2150 2150 100,00% 1.100 1.100				25	0			23230	782	21.50	21.43	101.62%	0.842	0.856	
1 0 Back Surface 0 26140 1800 14.00 13.11 122.74% 0.622 0.76 LTE Band 25	IE Band 13			50							21.27				-
1	nuive spot-cneck			-	U	pack Surface	0	23230	/82	∠1.50	∠1.50	100.00%	1.100	1.100	
1	TF Band 25			1	0	Back Surface	0	26140	1860	14.00	13.11	122 74%	0.622	0.763	· .
TE Band 25 CP CP CP CP CP CP CP C				1			-							0.784	027
LTE Band 25 20MHz				1										0.756	1
LTE Band 25 1							0							0.779	-
TE Band 25 1		20MHz	QPSK	100				26590						0.749	-
TTE Band 25	TE Band 25			1		Top Edge	0	26365	1882.5	14.00	13.15	121.62%	0.620	0.754	-
1 0 Back Surface 0 20365 1882.5 14.00 13.15 12.162% 0.599 0.72												124.17%		0.736	-
1 0 Back Surface 0 26765 821.5 19.00 18.16 121.34% 0.640 0.77 ITE Band 26 FCC 1 0 Back Surface 0 26865 831.5 19.00 18.12 119.95% 0.663 0.79 ITE Band 26 FCC 1 0 Back Surface 0 26865 831.5 19.00 18.12 119.95% 0.663 0.79 ITE Band 26 FCC 15Mez 0 Construction 0 Back Surface 0 26865 831.5 19.00 18.15 121.62% 0.638 0.79 ITE Band 26 FCC 15Mez 0 Construction 0 Back Surface 0 26865 831.5 19.00 18.05 124.45% 0.625 0.77 ITE Band 26 FCC 15Mez 0 Construction 0 Construction 0 Construction 0 0.80 0.80 0.80 0.80 ITE Band 26 FCC 15Mez 0 Construction 0						Top Edge		26590	1905	14.00	13.06	124.17%	0.600	0.745	-
TE Band 26 FCC	ource spot-check			1	0	Back Surface	0	26365	1882.5	14.00	13.15	121.62%	0.599	0.728	-
TE Band 26 FCC	Rand 26 ECC				e	Raph Cultura		20705	824 E	10.00	18 10	121 249/	0.640	0.777	
TE Band 28 FCC	Band 26 FCC			1		Back Surface		26865	021.5 831.5	19.00		119 95%	0.040		028
TE Band 28 FCC				1										0.776	-
LTE Bard 26 FCC 15MHz QPSK 7759B Bask Surface 0 28965 6415 19.00 18.06 124.17% 0.917 0.76 124 119.5% 0.917 0.76 124 119.5% 0.917 0.76 124 119.5% 0.917 0.76 124 119.5% 0.917 0.76 124 119.5% 0.917 0.76 124 119.5% 0.917 0.76 124 119.5% 0.917 0.76 124 119.5% 0.917 0.918 124 119.5% 0.918 124 124 124 124 124 124 124 124 124 124				36										0.778	
LTE Bard 26 FCC 36		15MHz	QPSK											0.766	-
LTE Bard 28 FCC 36	Band 26 FCC			1	0	Top Edge	0	26865	831.5	19.00	18.21	119.95%	0.287	0.344	
LTE Band 26 FCC 75/98 Top Edge 0 26995 841.5 19.00 18.00 124.17% 0.256 0.31 2				36	0	Top Edge	0	26865	831.5	19.00	18.05	124.45%	0.275	0.342	
Zef source spot-fries. 1 0 Back Surface 0 26805 831.5 19.00 18.21 119.95% 0.649 0.77 LTE Band 66 1 0 Back Surface 0 132072 1720 12.59 12.41 100.09% 0.811 0.82 LTE Band 66 1 0 Back Surface 0 1320272 174.5 12.59 12.49 100.23% 0.834 0.82 LTE Band 66 1 0 Back Surface 0 132572 1770 12.59 12.45 101.10% 0.080 0.81 LTE Band 66 50 0 Back Surface 0 132572 1770 12.50 12.36 101.10% 0.090 0.81 LTE Band 69 50 0 Back Surface 0 132272 1775 12.50 12.36 103.28% 0.764 0.776 0.776 0.776 0.776 0.776 0.776 0.776 0.776 0.776 0.776 0.776 0.776		l		75	RB	Top Edge	0	26965	841.5	19.00	18.06	124.17%	0.256	0.318	-
LTE Bard 66 1 0 Back Surface 0 132322 1745 12:50 12:49 100:23% 0.834 0.83 LTE Bard 66 1 0 Back Surface 0 132572 1770 12:50 12:45 101:16% 0.808 0.81 LTE Bard 66 5 0 Back Surface 0 132572 1775 12:50 12:36 103:26% 0.764 0.78	ource spot-check			1	0	Back Surface	0	26865	831.5	19.00	18.21	119.95%	0.649	0.778	-
LTE Band 66 1 0 Bank Surface 0 1323/22 1745 12:50 12:49 100:23% 0.834 0.83 LTE Band 66 1 0 Bank Surface 0 1325/72 1770 12:50 12:45 101:16% 0.808 0.81 LTE Band 66 50 0 Bank Surface 0 1325/72 1775 12:50 12:36 103:26% 0.764 0.78								_							
LTE Bard 66 1 0 Bask Surface 0 132572 1770 12:50 12:45 101:16% 0.808 0.81 LTE Bard 66 5 0 132322 1745 12:50 12:36 103:28% 0.794 0.797 50 0 Bask Surface 0 132322 1745 12:50 12:36 103:28% 0.794 0.797 50 0 0 Bask Surface 0 132322 1745 12:50 12:36 103:28% 0.794 0.797 50 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	TE Band 66			1		Back Surface		132072	1720	12.50		102.09%		0.828	
LTE Band 66 50 0 Back Surface 0 132322 1745 12.50 12.36 103.28% 0.764 0.78						Back Surface						100.23%			029
LTE Band 66 100RB Back Surface 0 132072 1720 12.50 12.32 104.23% 0.789 0.82							0	132322	1745 1720	12.50 12.50	12.36	103.28%		0.789 0.822	-
		20MH+	Obsk	100										0.822	
		ZUMFIZ	ur an	1										0.794	
						Top Edge								0.811	-
LTE Band 66 50 0 Top Edge 0 132322 1745 12.50 12.36 103.26% 0.771 0.79		l		50				132322		12.50		103.28%		0.796	
LTE Band 66 100RB Top Edge 0 132072 1720 12.50 12.32 104.23% 0.765 0.79						Top Edge	0	132072	1720	12.50		104.23%		0.797	
	ource spot-check	l		1										0.776	

^{* -} repeated at the highest SAR measurement according to the KDB 865664 D01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at the times-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of locuments in the limits of liability, indemnification and purisdiction issues to the company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. prosecuted to the fullest extent of the law.



Page: 178 of 255

sensor on Ant2

Mode	Bandwidth	Modulation	RB	RB	Position	Distance	CH	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Scaling	Averaged SAR	over 1g (W/kg)	Plot page			
mode	(MHz)	modulion	Size	start	T GSIBGIT	(mm)	on .	(MHz)	Tolerance (dBm)	(dBm)	County	Measured	Reported	riorpage			
LTE Band 7			1	0	Back Surface	0	20850	2510	14.50	13.75	118.85%	0.549	0.652	030			
LTE Band 7			1	0	Back Surface	0	21100	2535	14.50	13.66	121.34%	0.519	0.630				
LTE Band 7			1	0	Back Surface	0	21350	2560	14.50	13.63	122.18%	0.522	0.638				
LTE Band 7			50	25	Back Surface	0	21100	2535	14.50	13.59	123.31%	0.512	0.631				
LTE Band 7	20MHz	QPSK	10	ORB	Back Surface	0	21350	2560	14.50	13.54	124.74%	0.520	0.649				
LTE Band 7			1	0	Top Edge	0	20850	2510	14.50	13.75	118.85%	0.532	0.632				
LTE Band 7			50	25	Top Edge	0	21100	2535	14.50	13.59	123.31%	0.502	0.619				
LTE Band 7			10	ORB	Top Edge	0	21350	2560	14.50	13.54	124.74%	0.511	0.637				
2nd source spot-check			1	0	Back Surface	0	20850	2510	14.50	13.75	118.85%	0.512	0.609	-			
LTE Band 38			1	0	Back Surface	0	37850	2580	17.50	17.11	109.40%	0.518	0.567				
LTE Band 38			1	0	Back Surface	0	38000	2595	17.50	17.15	108.39%	0.522	0.566				
LTE Band 38			1	0	Back Surface	0	38150	2610	17.50	17.21	106.91%	0.544	0.582	031			
LTE Band 38			50	0	Back Surface	0	37850	2580	17.50	17.09	109.90%	0.517	0.568				
LTE Band 38	20MHz	QPSK	QPSK	QPSK	QPSK	100	ORB	Back Surface	0	38000	2595	17.50	17.02	111.69%	0.520	0.581	
LTE Band 38			1	0	Top Edge	0	38150	2610	17.50	17.21	106.91%	0.516	0.552				
LTE Band 38	\		50	0	Top Edge	0	37850	2580	17.50	17.09	109.90%	0.496	0.545				
LTE Band 38			10	ORB	Top Edge	0	38000	2595	17.50	17.02	111.69%	0.501	0.560				
2nd source spot-check			1	0	Back Surface	0	38150	2610	17.50	17.21	106.91%	0.474	0.507				
LTE Band 41			1	0	Back Surface	0	39750	2506	19.50	19.49	100.23%	0.776	0.778	032			
LTE Band 41			1	0	Back Surface	0	40185	2549.5	19.50	19.31	104.47%	0.728	0.761				
LTE Band 41			1	0	Back Surface	0	40620	2593	19.50	19.30	104.71%	0.738	0.773				
LTE Band 41			1	0	Back Surface	0	41055	2636.5	19.50	19.33	103.99%	0.741	0.771	-			
LTE Band 41		1	1	0	Back Surface	0	41490	2680	19.50	19.28	105.20%	0.725	0.763				
LTE Band 41	20MHz	QPSK	50	0	Back Surface	0	40185	2549.5	19.50	19.20	107.15%	0.716	0.767				
LTE Band 41		1	10	ORB	Back Surface	0	41490	2680	19.50	19.17	107.89%	0.718	0.775				
LTE Band 41		1	1	0	Top Edge	0	39750	2506	19.50	19.49	100.23%	0.456	0.457				
LTE Band 41		1	50	0	Top Edge	0	40185	2549.5	19.50	19.20	107.15%	0.434	0.465				
LTE Band 41			10	ORB	Top Edge	0	41490	2680	19.50	19.17	107.89%	0.428	0.462	-			
2nd source spot-check		I	1	0	Back Surface	0	39750	2506	19.50	19 49	100.23%	0.723	0.725				





Page: 179 of 255

sensor off Ant4

		Distance		Freq.	Max. Rated Avg.	Measured	Duty cycle	Power	Averaged SAF	over 1g (W/kg)	
Mode	Position	(mm)	СН	(MHz)	Power + Max. Tolerance (dBm)	Avg. Power (dBm)	scaling	scaling	Measured	Reported	Plot page
WLAN 802.11b	Back Surface	0	11	2462	11.00	10.68	1.01	107.65%	0.478	0.517	033
WLAN 802.11b	Top Edge	0	-11	2462	11.00	10.68	1.01	107.65%	0.192	0.208	-
WLAN 802.11b	Bottom Edge	0	- 1	2412	11.00	10.47	1.01	112.98%	0.001	0.001	-
WLAN 802.11b	Left Edge	0	1	2412	11.00	10.47	1.01	112.98%	0.018	0.020	-
WLAN 802.11b	Right Edge	0	1	2412	11.00	10.47	1.01	112.98%	0.023	0.026	
2nd source spot-check	Back Surface	0	11	2462	11.00	10.68	1.01	107.65%	0.422	0.457	
					•						
									4	lower to (M/kg)	

Mode Po:		Distance		Freq. (MHz)	Max. Rated Avg. Power + Max. Tolerance (dBm)	Measured Avg. Power (dBm)	Duty cycle scaling	Power scaling	Averaged SAR over 1g (W/kg)		
	Position	(mm)	СН						Measured	Reported	Plot page
Bluetooth(GFSK)	Back Surface	14	78	2480	10.00	9.15	1.31	121.62%	0.023	0.037	034
Bluetooth(GFSK)	Top Edge	15	78	2480	10.00	9.15	1.31	121.62%	0.015	0.024	-
Bluetooth(GFSK)	Bottom Edge	0	78	2480	10.00	9.15	1.31	121.62%	0.001	0.002	-
Bluetooth(GFSK)	Left Edge	0	78	2480	10.00	9.15	1.31	121.62%	0.009	0.015	-
Bluetooth(GFSK)	Right Edge	0	78	2480	10.00	9.15	1.31	121.62%	0.012	0.019	-
2nd source spot-check	Back Surface	14	78	2480	10.00	9.15	1.31	121.62%	0.020	0.032	-

Mode Position	Dis	Position Distance (mm)	Distance	Distance	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle	Power	Averaged SAR	over 1g (W/kg)	Plot page
	Position		СН	(MHz)	Tolerance (dBm)	(dBm)	scaling	scaling	Measured	Reported	Plot page		
WLAN 802.11a 5.2G	Back Surface	14	48	5240	14.50	14.17	1.03	107.89%	0.137	0.152			
WLAN 802.11a 5.2G	Top Edge	15	48	5240	14.50	14.17	1.03	107.89%	0.295	0.327	035		
WLAN 802.11a 5.2G	Bottom Edge	0	48	5240	14.50	14.17	1.03	107.89%	0.001	0.001	-		
WLAN 802.11a 5.2G	Left Edge	0	48	5240	14.50	14.17	1.03	107.89%	0.011	0.012	-		
WLAN 802.11a 5.2G	Right Edge	0	48	5240	14.50	14.17	1.03	107.89%	0.101	0.112	-		
2nd source spot-check	Top Edge	15	48	5240	14.50	14.17	1.03	107.89%	0.227	0.251	-		

Mode Position	Davida	Darwa	Desition	Desition	Desition	Desition	Desition	Desides	Dealle	Decide	Desilies	Distance	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle	Power	Averaged SAR	over 1g (W/kg)	Plot page
	(mm)	СН	(MHz)	Tolerance (dBm)	(dBm)	scaling	scaling	Measured	Reported	Flot page											
WLAN 802.11a 5.3G	Back Surface	14	60	5300	14.50	14.19	1.03	107.40%	0.169	0.186	-										
WLAN 802.11a 5.3G	Top Edge	15	60	5300	14.50	14.19	1.03	107.40%	0.295	0.325	036										
WLAN 802.11a 5.3G	Bottom Edge	0	60	5300	14.50	14.19	1.03	107.40%	0.001	0.001	-										
WLAN 802.11a 5.3G	Left Edge	0	60	5300	14.50	14.19	1.03	107.40%	0.015	0.017	-										
WLAN 802.11a 5.3G	Right Edge	0	60	5300	14.50	14.19	1.03	107.40%	0.125	0.138	-										
2nd source spot-check	Top Edge	15	60	5300	14.50	14.19	1.03	107.40%	0.254	0.280	-										

Mode Position	Distance	Distance	Distance	Distance	Distance	Distance	Distance	Distance	Distance	Distance	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle	Power	Averaged SAR over 1g (W/kg)		Distance
	(mm)	СН	(MHz)	Tolerance (dBm)	(dBm)	scaling	scaling	Measured	Reported	Plot page									
WLAN 802.11n(40M) 5.6G	Back Surface	14	134	5670	14.00	13.88	1.04	102.80%	0.251	0.269	\-								
WLAN 802.11n(40M) 5.6G	Top Edge	15	134	5670	14.00	13.88	1.04	102.80%	0.588	0.629	037								
WLAN 802.11n(40M) 5.6G	Bottom Edge	0	134	5670	14.00	13.88	1.04	102.80%	0.003	0.003	-								
WLAN 802.11n(40M) 5.6G	Left Edge	0	134	5670	14.00	13.88	1.04	102.80%	0.033	0.035	-								
WLAN 802.11n(40M) 5.6G	Right Edge	0	134	5670	14.00	13.88	1.04	102.80%	0.238	0.255	-								
2nd source spot-check	Top Edge	15	134	5670	14.00	13.88	1.04	102.80%	0.499	0.534									

Mode Position	Position	Distance	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle	Power	Averaged SAR	over 1g (W/kg)	Plot page
	FUSIDIT	(mm)	СН	(MHz)	Tolerance (dBm)	(dBm)	scaling	scaling	Measured	Reported	Piot page
WLAN 802.11n(40M) 5.8	G Back Surface	14	151	5755	14.00	13.66	1.04	108.14%	0.277	0.312	-
WLAN 802.11n(40M) 5.8	G Top Edge	15	151	5755	14.00	13.66	1.04	108.14%	0.562	0.633	038
WLAN 802.11n(40M) 5.8	G Bottom Edge	0	151	5755	14.00	13.66	1.04	108.14%	0.002	0.003	-
WLAN 802.11n(40M) 5.8	G Left Edge	0	151	5755	14.00	13.66	1.04	108.14%	0.031	0.035	-
WLAN 802.11n(40M) 5.8	G Right Edge	0	151	5755	14.00	13.66	1.04	108.14%	0.244	0.275	-
2nd source spot-check	Top Edge	15	151	5755	14.00	13.66	1.04	108.14%	0.512	0.576	-



Page: 180 of 255

sensor on Ant4

Mode	Position	Distance	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle	Power	Averaged SAF	Rover 1g (W/kg)	Plot pag
mode	1 USIBUIT	(mm)	0	(MHz)	Tolerance (dBm)	(dBm)	scaling	scaling	Measured	Reported	1 lot page
Bluetooth(GFSK)	Back Surface	0	39	2441	6.00	5.84	1.31	103.75%	0.124	0.168	039
Bluetooth(GFSK)	Top Edge	0	39	2441	6.00	5.84	1.31	103.75%	0.042	0.057	-
2nd source spot-check	Back Surface	0	39	2441	6.00	5.84	1.31	103.75%	0.111	0.151	-
Mode	Position	Distance (mm)	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle scaling	Power scaling	Averaged SAF	R over 1g (W/kg)	Plot pag
		(mm)		(MHz)	Tolerance (dBm)	(dBm)	scaling	scaling	Measured	Reported	
WLAN 802.11a 5.2G	Back Surface	0	36	5180	8.50	8.32	1.03	104.23%	0.525	0.561	· .
WLAN 802.11a 5.2G	Top Edge	0	36	5180	8.50	8.32	1.03	104.23%	0.713	0.762	040
2nd source spot-check	Top Edge	0	36	5180	8.50	8.32	1.03	104.23%	0.664	0.710	
Mode	Position	Distance	СН	Freq.	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle	Power scaling	Averaged SAR over 1g (W/kg)		Plot pa
Mode	1 0010011	(mm)	0.1	(MHz)	Tolerance (dBm)	(dBm)	scaling		Measured	Reported	Погра
WLAN 802.11a 5.3G	Back Surface	0	60	5300	8.00	7.92	1.03	101.86%	0.550	0.575	-
WLAN 802.11a 5.3G	Top Edge	0	60	5300	8.00	7.92	1.03	101.86%	0.612	0.640	041
2nd source spot-check	Top Edge	0	60	5300	8.00	7.92	1.03	101.86%	0.583	0.609	-
Mode	Position	Distance (mm)	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Duty cycle scaling	Power scaling	Averaged SAR over 1g (W/kg)		Plot pa
		(mm)		(MHZ)	Tolerance (dBm)	(dBm)	scaling	scaling	Measured	Reported	
WLAN 802.11n(40M) 5.6G	Back Surface	0	134	5670	5.50	5.33	1.04	103.99%	0.425	0.460	-
WLAN 802.11n(40M) 5.6G	Top Edge	0	134	5670	5.50	5.33	1.04	103.99%	0.616	0.667	042
2nd source spot-check	Top Edge	0	134	5670	5.50	5.33	1.04	103.99%	0.578	0.626	-
Mode	Position	Distance	СН	Freq. (MHz)	Max. Rated Avg. Power + Max.	Measured Avg. Power	Aug Power Duty cycle	Power	Averaged SAR over 1g (W/kg)		Plot page
		(mm)		(MHZ)	Tolerance (dBm)	(dBm)	scaling	scaling	Measured	Reported	
WLAN 802.11n(40M) 5.8G	Back Surface	0	159	5795	5.50	5.39	1.04	102.57%	0.387	0.413	-
WLAN 802.11n(40M) 5.8G	Top Edge	0	159	5795	5.50	5.39	1.04	102.57%	0.725	0.774	043
2nd source spot-check	Top Edge	0	159	5795	5.50	5.39	1.04	102.57%	0.702	0.750	-

Note:

Reported SAR = measured SAR * Power scaling * Duty cycle scaling

Reporting statements of conformity 6.3

The conformity statement in this report is based solely on the test results, measurement uncertainty is excluded.

6.4 Conclusion

The device is compliant because all the standalone results are less than their corresponding criteria.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司



Page: 181 of 255

SIMULTANEOUS TRANSMISSION ANALYSIS

Simultaneous Transmission Scenarios:

Simultaneous Transmit Configurations	Body
WLAN 5GHz Ant4 + BT Ant4	Yes
WWAN + WLAN 2.4GHz Ant4	Yes
WWAN + WLAN 5GHz Ant4	Yes
WWAN + WLAN 5GHz Ant4 + BT Ant4	Yes



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at the times-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of locuments in the limits of liability, indemnification and purisdiction issues to the company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. prosecuted to the fullest extent of the law.



Page: 182 of 255

7.2 **Estimated SAR calculation**

According to KDB447498 D01v06 - When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

Estimated SAR =
$$\frac{\text{Max.tune up power (mW)}}{\text{Min. test separation distance(mm)}} \times \frac{\sqrt{f(\text{GHz})}}{7.5}$$

If the minimum test separation distance is < 5mm, a distance of 5mm is used for estimated SAR calculation. When the test separation distance is >50mm, the 0.4W/kg is used for SAR-1g.

7.3 SPLSR evaluation and analysis

Per KDB447498D01, when the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR sum to peak location separation ratio(SPLSR).

The simultaneous transmitting antennas in each operating mode and exposure condition combination must be considered one pair at a time to determine the SAR to peak location separation ratio to qualify for test exclusion.

The ratio is determined by (SAR1 + SAR2)^1.5/Ri, rounded to two decimal digits, and must be ≤ 0.04 for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion.

SAR1 and SAR2 are the highest reported or estimated SAR for each antenna in the pair, and Ri is the separation distance between the peak SAR locations for the antenna pair in mm.

When standalone test exclusion applies, SAR is estimated; the peak location is assumed to be at the feed-point or geometric center of the antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 183 of 255

Simultaneous Transmission Combination

sensor on Ant1

				FCC Rep	orted SAR		Scenario1	Scenario2	Scenario3	Scenario4
			0	2	5	6	5+6	0+2	0+5	0+5+6
	Exposure Pos	ition	WWAN Ant 1	2.4GHz WLAN Ant 4	5GHz WLAN Ant 4	Bluetooth Ant 4	Summed	Summed	Summed	Summed
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/k
GPRS850<1Dn4Up>	Back Surface	0	0.741	0.517	0.575	0.168	0.743	1.258	1.316	1.484
GF1(3030<1D1140p>	Top Edge	0	0.281	0.208	0.774	0.057	0.831	0.489	1.055	1.112
GPRS1900<1Dn4Up>	Back Surface	0	0.619	0.517	0.575	0.168	0.743	1.136	1.194	1.362
51 10 1500 1151140p	Top Edge	0	0.573	0.208	0.774	0.057	0.831	0.781	1.347	1.404
WCDMA Band II	Back Surface	0	0.663	0.517	0.575	0.168	0.743	1.180	1.238	1.406
WODWA Band II	Top Edge	0	0.636	0.208	0.774	0.057	0.831	0.844	1.410	1.467
WCDMA Band IV	Back Surface	0	0.399	0.517	0.575	0.168	0.743	0.916	0.974	1.142
WODING Band IV	Top Edge	0	0.355	0.208	0.774	0.057	0.831	0.563	1.129	1.186
WCDMA Band V	Back Surface	0	0.604	0.517	0.575	0.168	0.743	1.121	1.179	1.347
WCDINA Balld V	Top Edge	0	0.286	0.208	0.774	0.057	0.831	0.494	1.060	1.117
LTE	Back Surface	0	0.712	0.517	0.575	0.168	0.743	1.229	1.287	1.455
Band 2	Top Edge	0	0.671	0.208	0.774	0.057	0.831	0.879	1.445	1.502
LTE	Back Surface	0	1.100	0.517	0.575	0.168	0.743	1.617	1.675	1.843
Band 4	Top Edge	0	0.953	0.208	0.774	0.057	0.831	1.161	1.727	1.784
LTE	Back Surface	0	0.877	0.517	0.575	0.168	0.743	1.394	1.452	1.620
Band 5	Top Edge	0	0.390	0.208	0.774	0.057	0.831	0.598	1.164	1.221
LTE	Back Surface	0	1.186	0.517	0.575	0.168	0.743	1.703	1.761	1.929
Band 12	Top Edge	0	0.749	0.208	0.774	0.057	0.831	0.957	1.523	1.580
LTE	Back Surface	0	1.120	0.517	0.575	0.168	0.743	1.637	1.695	1.863
Band 13	Top Edge	0	0.861	0.208	0.774	0.057	0.831	1.069	1.635	1.692
LTE	Back Surface	0	0.784	0.517	0.575	0.168	0.743	1.301	1.359	1.527
Band 25	Top Edge	0	0.754	0.208	0.774	0.057	0.831	0.962	1.528	1.585
LTE	Back Surface	0	0.795	0.517	0.575	0.168	0.743	1.312	1.370	1.538
Band 26_FCC	Top Edge	0	0.344	0.208	0.774	0.057	0.831	0.552	1.118	1.175
LTE	Back Surface	0	0.836	0.517	0.575	0.168	0.743	1.353	1.411	1.579
Band 66	Top Edge	0	0.819	0.208	0.774	0.057	0.831	1.027	1.593	1.650

sensor on Ant2

				FCC Rep	orted SAR		Scenario1	Scenario2	Scenario3	Scenario4
			0	2	5	6	5+6	0+2	0+5	0+5+6
	Exposure Pos	Exposure Position	WWAN Ant 2	2.4GHz WLAN Ant 4	5GHz WLAN Ant 4	Bluetooth Ant 4	Summed	Summed	Summed	Summed
		1g SAR 1g SAR 1g SAR 1g SAR (W/kg) (W/kg) (W/kg) (W/kg)		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)			
LTE	Back Surface	0	0.652	0.517	0.575	0.168	0.743	1.169	1.227	1.395
Band 7	Top Edge	0	0.637	0.208	0.774	0.057	0.831	0.845	1.411	1.468
LTE	Back Surface	0	0.582	0.517	0.575	0.168	0.743	1.099	1.157	1.325
Band 38	Top Edge	0	0.560	0.208	0.774	0.057	0.831	0.768	1.334	1.391
LTE	Back Surface	0	0.778	0.517	0.575	0.168	0.743	1.295	1.353	1.521
Band 41	Top Edge	0	0.465	0.208	0.774	0.057	0.831	0.673	1.239	1.296

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at the times-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of locuments in the limits of liability, indemnification and purisdiction issues to the company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 184 of 255

WLAN ant4 full power + WWAN ant1 reduce power

No P-ser	sor supported on Botto	m / Left / Right	edges		FCC Rep	orted SAR		Scenario1	Scenario2	Scenario3	Scenario
				0	2	5	6	5+6	0+2	0+5	0+5+6
		WWAN Ant 1	WLAN	WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth	Summed	Summed	Summed	Summed
	Exposure Position	(Back / Top Sensor on)	Ant 4 (Sensor off)	Ant 1 1g SAR	Ant 4 1g SAR	Ant 4 1g SAR	Ant 4 1g SAR	Sullilled	Suillilled		Julillieu
		Selisor off)		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/
	Back Surface	0	2.4G 0 / 5G&BT 14	0.741	0.517	0.312	0.037	0.349	1.258	1.053	1.090
GPRS850<1Dn4Up>	Top Edge	0	2.4G 0 / 5G&BT 15 0	0.281	0.208	0.633	0.024	0.657	0.489	0.914	0.938
GFK3630 CIDII4Op	Bottom Edge Left Edge	0	0	0.026	0.001	0.005	0.002	0.050	0.029	0.031	0.033
	Right Edge	0	0	0.041	0.026	0.275	0.019	0.294	0.067	0.316	0.335
	Back Surface	0	2.4G 0 / 5G&BT 14	0.619	0.517	0.312	0.037	0.349	1.136	0.931	0.968
	Top Edge	0	2.4G 0 / 5G&BT 15	0.573	0.208	0.633	0.024	0.657	0.781	1.206	1.230
GPRS1900<1Dn4Up>	Bottom Edge	0	0	0.020	0.001	0.003	0.002	0.005	0.021	0.023	0.025
	Left Edge	0	0	0.116	0.020	0.035	0.015	0.050	0.136	0.151	0.166
	Right Edge Back Surface	0	0 2 4G 0 / 5G&BT 14	0.030	0.026	0.275	0.019	0.294	0.056	0.305	1.012
-	Top Edge	0	2.4G 0 / 5G&BT 14	0.636	0.517	0.633	0.037	0.657	0.844	1.269	1.012
WCDMA Band II	Bottom Edge	0	0	0.012	0.001	0.003	0.002	0.005	0.013	0.015	0.017
ŧ	Left Edge	0	0	0.061	0.020	0.035	0.015	0.050	0.081	0.096	0.111
	Right Edge	0	0	0.019	0.026	0.275	0.019	0.294	0.045	0.294	0.313
	Back Surface	0	2.4G 0 / 5G&BT 14	0.399	0.517	0.312	0.037	0.349	0.916	0.711	0.748
MODMA D	Top Edge	0	2.4G 0 / 5G&BT 15	0.355	0.208	0.633	0.024	0.657	0.563	0.988	1.012
WCDMA Band IV	Bottom Edge Left Edge	0	0	0.024	0.001	0.003	0.002	0.005	0.025	0.027	0.029
	Right Edge	0	0	0.080	0.020	0.035	0.019	0.050	0.100	0.115	0.130
	Back Surface	0	2.4G 0 / 5G&BT 14	0.604	0.517	0.312	0.037	0.349	1.121	0.916	0.953
	Top Edge	0	2.4G 0 / 5G&BT 15	0.286	0.208	0.633	0.024	0.657	0.494	0.919	0.943
WCDMA Band V	Bottom Edge	0	0	0.021	0.001	0.003	0.002	0.005	0.022	0.024	0.026
	Left Edge	0	0	0.075	0.020	0.035	0.015	0.050	0.095	0.110	0.125
400	Right Edge	0	0	0.014	0.026	0.275	0.019	0.294	0.040	0.289	0.308
	Back Surface Top Edge	0	2.4G 0 / 5G&BT 14 2.4G 0 / 5G&BT 15	0.712	0.517	0.312	0.037	0.349	1.229 0.879	1.024	1.061
LTE	Bottom Edge	0	0	0.013	0.208	0.003	0.024	0.005	0.014	0.016	0.018
Band 2	Left Edge	0	0	0.051	0.020	0.035	0.015	0.050	0.071	0.086	0.101
	Right Edge	0	0	0.018	0.026	0.275	0.019	0.294	0.044	0.293	0.312
	Back Surface	0	2.4G 0 / 5G&BT 14	1.100	0.517	0.312	0.037	0.349	1.617	1.412	1.449
LTE	Top Edge	0	2.4G 0 / 5G&BT 15	0.953	0.208	0.633	0.024	0.657	1.161	1.586	1.610
Band 4	Bottom Edge	0	0	0.024	0.001	0.003	0.002	0.005	0.025	0.027	0.029
-	Left Edge Right Edge	0	0	0.071	0.020	0.035	0.015	0.050	0.091	0.106	0.121
	Back Surface	0	2.4G 0 / 5G&BT 14	0.877	0.517	0.312	0.037	0.349	1.394	1.189	1.226
	Top Edge	0	2.4G 0 / 5G&BT 15	0.390	0.208	0.633	0.024	0.657	0.598	1.023	1.047
LTE Band 5	Bottom Edge	0	0	0.030	0.001	0.003	0.002	0.005	0.031	0.033	0.035
	Left Edge	0	0	0.077	0.020	0.035	0.015	0.050	0.097	0.112	0.127
	Right Edge	0	0	0.014	0.026	0.275	0.019	0.294	0.040	0.289	0.308
-	Back Surface	0	2.4G 0 / 5G&BT 14 2.4G 0 / 5G&BT 15	1.186 0.749	0.517	0.312	0.037	0.349	1.703 0.957	1.498	1.535
LTE	Top Edge Bottom Edge	0	0	0.749	0.208	0.003	0.024	0.005	0.029	0.031	0.033
Band 12	Left Edge	0	0	0.076	0.020	0.035	0.015	0.050	0.096	0.111	0.126
	Right Edge	0	0	0.015	0.026	0.275	0.019	0.294	0.041	0.290	0.309
	Back Surface	0	2.4G 0 / 5G&BT 14	1.120	0.517	0.312	0.037	0.349	1.637	1.432	1.469
LTF	Top Edge	0	2.4G 0 / 5G&BT 15	0.861	0.208	0.633	0.024	0.657	1.069	1.494	1.518
Band 13	Bottom Edge	0	0	0.034	0.001	0.003	0.002	0.005	0.035	0.037	0.039
	Left Edge	0	0	0.082	0.020	0.035	0.015	0.050	0.102	0.117	0.132
	Right Edge Back Surface	0	2.4G 0 / 5G&BT 14	0.016	0.026	0.275	0.019	0.294	1.301	1.096	1.133
	Top Edge	0	2.4G 0 / 5G&BT 15	0.754	0.208	0.633	0.024	0.657	0.962	1.387	1.411
LTE Band 25	Bottom Edge	0	0	0.013	0.001	0.003	0.002	0.005	0.014	0.016	0.018
	Left Edge	0	0	0.066	0.020	0.035	0.015	0.050	0.086	0.101	0.116
	Right Edge	0	0	0.022	0.026	0.275	0.019	0.294	0.048	0.297	0.316
	Back Surface	0	2.4G 0 / 5G&BT 14	0.795	0.517	0.312	0.037	0.349	1.312	1.107	1.144
LTE	Top Edge	0	2.4G 0 / 5G&BT 15	0.344	0.208	0.633	0.024	0.657	0.552	0.977	1.001
Band 26_FCC	Bottom Edge Left Edge	0	0	0.027	0.001	0.003	0.002	0.005	0.028	0.030	0.032
	Right Edge	0	0	0.052	0.020	0.035	0.015	0.050	0.072	0.087	0.102
	Back Surface	0	2.4G 0 / 5G&BT 14	0.836	0.517	0.312	0.037	0.349	1.353	1.148	1.185
			2.4G 0 / 5G&BT 15	0.819	0.208	0.633	0.024	0.657	1.027	1.452	1.476
	Top Edge	0	2.4G 0 / 5G&B1 15	0.019	0.200	0.000	0.024			1.402	1.470
LTE Band 66	Top Edge Bottom Edge	0	0	0.032	0.001	0.003	0.002	0.005	0.033	0.035	0.037

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at the times-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of locuments in the limits of liability, indemnification and purisdiction issues to the company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. prosecuted to the fullest extent of the law.



Page: 185 of 255

WLAN ant4 reduce power + WWAN ant2 full power

No P-ser	sor supported on Bottom	/ Left / Right ed	ges		FCC Rep	orted SAR		Scenario1	Scenario2	Scenario3	Scenario4
				0	2	5	6	5+6	0+2	0+5	0+5+6
	Exposure Position	WWAN Ant 2	WLAN Ant 4 (Back / Top	WWAN Ant 2	2.4GHz WLAN Ant 4	5GHz WLAN Ant 4	Bluetooth Ant 4	Summed	Summed	Summed	Summed
		(Sensor off)	Sensor on)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
	Back Surface	12	0	0.765	0.517	0.575	0.168	0.743	1.282	1.340	1.508
	Top Edge	13	0	0.336	0.208	0.774	0.057	0.831	0.544	1.110	1.167
LTE Band 7	Bottom Edge	0	0	0.023	0.001	0.003	0.002	0.005	0.024	0.026	0.028
	Left Edge	0	0	0.093	0.020	0.035	0.015	0.050	0.113	0.128	0.143
	Right Edge	0	0	0.037	0.026	0.275	0.020	0.295	1.282 0.544 0.024 0.113 0.063 0.950 0.394 0.005 0.094	0.312	0.332
	Back Surface	12	0	0.433	0.517	0.575	0.168	0.743	0.950	1.008	1.176
	Top Edge	13	0	0.186	0.208	0.774	0.057	0.831	0.394	0.960	1.017
LTE Band 38	Bottom Edge	0	0	0.004	0.001	0.003	0.002	0.005	0.005	0.007	0.009
	Left Edge	0	0	0.074	0.020	0.035	0.015	0.050	0.094	0.109	0.124
	Right Edge	0	0	0.049	0.026	0.275	0.020	0.295	0.075	0.324	0.344
	Back Surface	12	0	0.488	0.517	0.575	0.168	0.743	1.005	1.063	1.231
	Top Edge	13	0	0.208	0.208	0.774	0.057	0.831	0.416	0.982	1.039
LTE Band 41	Bottom Edge	0	0	0.008	0.001	0.003	0.002	0.005	0.009	0.011	0.013
	Left Edge	0	0	0.074	0.020	0.035	0.015	0.050	0.094	0.109	0.124
	Right Edge	0	0	0.063	0.026	0.275	0.020	0.295	0.089	0.338	0.358



Page: 186 of 255

WLAN ant4 full power + WWAN ant1 full power

No P-se	ensor supported on Botto	m / Left / Right	edges		FCC Rep	orted SAR		Scenario1	Scenario2	Scenario3	Scenario
			ı	0	2	5	6	5+6	0+2	0+5	0+5+6
	Exposure Position	WWAN Ant 1	WLAN Ant 4	WWAN Ant 1	2.4GHz WLAN	5GHz WLAN	Bluetooth Ant 4	Summed	Summed	Summed	Summed
	Exposure Position	(Sensor off)	(Sensor off)	100.1	1g SAR	1g SAR	Ant 4 1g SAR				
				1g SAR (W/kg)	(W/kg)	(W/kg)	(W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/
	Back Surface	16	2.4G 0 / 5G&BT 14	0.311	0.517	0.312	0.037	0.349	0.828	0.623	0.660
GPRS850<1Dn4Up>	Top Edge	17	2.4G 0 / 5G&BT 15	0.103	0.208	0.633	0.024	0.657	0.311	0.736	0.760
SPRS850 CIDN4Up	Bottom Edge Left Edge	0	0	0.028	0.001	0.003	0.002	0.005	0.029	0.031	0.033
	Right Edge	0	0	0.136	0.020	0.035	0.015	0.090	0.156	0.171	0.186
	Back Surface	16	2.4G 0 / 5G&BT 14	0.498	0.517	0.312	0.037	0.349	1.015	0.810	0.847
	Top Edge	17	2.4G 0 / 5G&BT 15	0.351	0.208	0.633	0.024	0.657	0.559	0.984	1.008
PRS1900<1Dn4Up>	Bottom Edge	0	0	0.020	0.001	0.003	0.002	0.005	0.021	0.023	0.025
	Left Edge	0	0	0.116	0.020	0.035	0.015	0.050	0.136	0.151	0.166
	Right Edge	0	0	0.030	0.026	0.275	0.019	0.294	0.056	0.305	0.324
	Back Surface	16	2.4G 0 / 5G&BT 14	0.889	0.517	0.312	0.037	0.349	1.406	1.201	1.238
	Top Edge	17	2.4G 0 / 5G&BT 15	0.538	0.208	0.633	0.024	0.657	0.746	1.171	1.195
WCDMA Band II	Bottom Edge	0	0	0.012	0.001	0.003	0.002	0.005	0.013	0.015	0.017
	Left Edge	0	0	0.061	0.020	0.035	0.015	0.050	0.081	0.096	0.111
	Right Edge	0	0	0.019	0.026	0.275	0.019	0.294	0.045	0.294	0.313
	Back Surface	16	2.4G 0 / 5G&BT 14	0.663	0.517	0.312	0.037	0.349	1.180	0.975	1.012
	Top Edge	17	2.4G 0 / 5G&BT 15	0.406	0.208	0.633	0.024	0.657	0.614	1.039	1.063
WCDMA Band IV	Bottom Edge	0	0	0.024	0.001	0.003	0.002	0.005	0.025	0.027	0.029
	Left Edge	0	0	0.080				0.050	0.100	0.115	
	Right Edge Back Surface	16	0 2.4G 0 / 5G&BT 14	0.021	0.026	0.275	0.019	0.294	0.047	0.296	0.315 0.743
	Top Edge	17	2.4G 0 / 5G&BT 15	0.142	0.208	0.633	0.037	0.657	0.911	0.706	0.743
WCDMA Band V	Bottom Edge	0	0	0.021	0.001	0.003	0.002	0.005	0.022	0.024	0.026
	Left Edge	0	0	0.075	0.020	0.035	0.015	0.050	0.095	0.110	0.125
	Right Edge	0	0	0.014	0.026	0.275	0.019	0.294	0.040	0.289	0.308
	Back Surface	16	2.4G 0 / 5G&BT 14	0.832	0.517	0.312	0.037	0.349	1.349	1.144	1.181
	Top Edge	17	2.4G 0 / 5G&BT 15	0.409	0.208	0.633	0.024	0.657	0.617	1.042	1.066
LTE Band 2	Bottom Edge	0	0	0.013	0.001	0.003	0.002	0.005	0.014	0.016	0.018
	Left Edge	0	0	0.051	0.020	0.035	0.015	0.050	0.071	0.086	0.101
	Right Edge	0	0	0.018	0.026	0.275	0.019	0.294	0.044	0.293	0.312
	Back Surface	16	2.4G 0 / 5G&BT 14	0.512	0.517	0.312	0.037	0.349	1.029	0.824	0.861
LTE	Top Edge	17	2.4G 0 / 5G&BT 15	0.383	0.208	0.633	0.024	0.657	0.591	1.016	1.040
Band 4	Bottom Edge	0	0	0.024	0.001	0.003	0.002	0.005	0.025	0.027	0.029
	Left Edge	0	0	0.071	0.020	0.035	0.015	0.050	0.091	0.106	0.121
	Right Edge Back Surface	16	2.4G 0 / 5G&BT 14	0.021	0.026	0.275	0.019	0.294	0.047	0.296	0.315
	Top Edge	17	2.4G 0 / 5G&BT 14 2.4G 0 / 5G&BT 15	0.247	0.208	0.633	0.037	0.657	0.764	0.559	0.764
LTE	Bottom Edge	0	0	0.030	0.200	0.003	0.002	0.005	0.031	0.033	0.035
Band 5	Left Edge	0	0	0.077	0.020	0.035	0.015	0.050	0.097	0.112	0.127
	Right Edge	0	0	0.014	0.026	0.275	0.019	0.294	0.040	0.289	0.308
	Back Surface	16	2.4G 0 / 5G&BT 14	0.284	0.517	0.312	0.037	0.349	0.801	0.596	0.633
	Top Edge	17	2.4G 0 / 5G&BT 15	0.119	0.208	0.633	0.024	0.657	0.327	0.752	0.776
LTE Band 12	Bottom Edge	0	0	0.028	0.001	0.003	0.002	0.005	0.029	0.031	0.033
	Left Edge	0	0	0.076	0.020	0.035	0.015	0.050	0.096	0.111	0.126
	Right Edge	0	0	0.015	0.026	0.275	0.019	0.294	0.041	0.290	0.309
	Back Surface	16	2.4G 0 / 5G&BT 14	0.305	0.517	0.312	0.037	0.349	0.822	0.617	0.654
LTE	Top Edge	17	2.4G 0 / 5G&BT 15	0.125	0.208	0.633	0.024	0.657	0.333	0.758	0.782
Band 13	Bottom Edge	0	0	0.034	0.001	0.003	0.002	0.005	0.035	0.037	0.039
	Left Edge	0	0	0.082	0.020	0.035	0.015	0.050	0.102	0.117	0.132
	Right Edge Back Surface	0 16	0 2.4G 0 / 5G&BT 14	0.016	0.026	0.275	0.019	0.294	0.042 1.238	0.291	0.310
	Back Surface Top Edge	16	2.4G 0 / 5G&BT 14	0.721	0.517	0.312	0.037	0.349	1.238	1.033	1.070
LTE	Bottom Edge	0	2.4G 0 / 5G&B1 15	0.713	0.206	0.003	0.024	0.005	0.921	0.016	0.018
Band 25	Left Edge	0	0	0.066	0.020	0.035	0.015	0.050	0.086	0.101	0.116
	Right Edge	0	0	0.022	0.026	0.035	0.019	0.000	0.048	0.101	0.316
	Back Surface	16	2.4G 0 / 5G&BT 14	0.283	0.517	0.312	0.037	0.349	0.800	0.595	0.632
	Top Edge	17	2.4G 0 / 5G&BT 15	0.112	0.208	0.633	0.024	0.657	0.320	0.745	0.769
LTE Band 26 FCC	Bottom Edge	0	0	0.027	0.001	0.003	0.002	0.005	0.028	0.030	0.032
	Left Edge	0	0	0.052	0.020	0.035	0.015	0.050	0.072	0.087	0.102
	Right Edge	0	0	0.015	0.026	0.275	0.019	0.294	0.041	0.290	0.309
	Back Surface	16	2.4G 0 / 5G&BT 14	0.703	0.517	0.312	0.037	0.349	1.220	1.015	1.052
	Top Edge	17	2.4G 0 / 5G&BT 15	0.508	0.208	0.633	0.024	0.657	0.716	1.141	1.165
LTE Band 66	Bottom Edge	0	0	0.032	0.001	0.003	0.002	0.006	0.033	0.035	0.037
	Left Edge	0	0	0.094	0.020	0.035	0.015	0.050	0.114	0.129	0.144
	Right Edge	0	0	0.024	0.026	0.275	0.019	0.294	0.050	0.299	0.318

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

原并另有說明,此報告結果性質測能之樣節俱東自即此樣節但來留卯天。本報告未經本公司書間計可,不可能分復製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd



Page: 187 of 255

WLAN ant4 full power + WWAN ant2 full power

No P	sensor supported on Bo	ttom / Left / Righ	t edges		FCC Rep	orted SAR		Scenario1	Scenario2	Scenario3	Scenario4
				0	2	5	6	5+6	0+2	0+5	0+5+6
	Exposure Position	WWAN Ant 2	WLAN Ant 4	WWAN Ant 2	2.4GHz WLAN Ant 4	5GHz WLAN Ant 4	Bluetooth Ant 4	Summed	Summed	Summed	Summed
		(Sensor off)	(Sensor off)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
	Back Surface	12	2.4G 0 / 5G&BT 14	0.765	0.517	0.312	0.037	0.349	1.282	1.077	1.114
	Top Edge	13	2.4G 0 / 5G&BT 15	0.336	0.208	0.633	0.024	0.657	0.544	0.969	0.993
LTE Band 7	Bottom Edge	0	0	0.023	0.001	0.003	0.002	0.005	0.024	0.026	0.028
	Left Edge	0	0	0.093	0.020	0.035	0.015	0.050	0.113	0.128	0.143
	Right Edge	0	2.4G 0 / 5G&BT 15 0.336 0.208 0.633 0.024 0.657 0.544 0.3 0 0.023 0.001 0.003 0.002 0.005 0.024 0.1 0 0.093 0.020 0.035 0.015 0.050 0.113 0. 0 0.037 0.026 0.275 0.019 0.294 0.063 0. 2.4G 0 / 5G&BT 14 0.433 0.517 0.312 0.037 0.349 0.950 0. 2.4G 0 / 5G&BT 15 0.186 0.208 0.633 0.024 0.657 0.394 0. 0 0.004 0.001 0.003 0.002 0.005 0.005 0.005	0.312	0.331						
	Back Surface	12	2.4G 0 / 5G&BT 14	0.433	0.517	0.312	0.037	0.349	0.950	0.745	0.782
	Top Edge	13	2.4G 0 / 5G&BT 15	0.186	0.208	0.633	0.024	0.657	0.394	0.819	0.843
LTE Band 38	Bottom Edge	0	0	0.004	0.001	0.003	0.002	0.005	0.005	0.007	0.009
	Left Edge	0	0	0.074	0.020	0.035	0.015	0.050	0.094	0.109	0.124
	Right Edge	0	0	0.049	0.026	0.275	0.019	0.294	0.075	0.324	0.343
	Back Surface	12	2.4G 0 / 5G&BT 14	0.488	0.517	0.312	0.037	0.349	1.005	0.800	0.837
	Top Edge	13	2.4G 0 / 5G&BT 15	0.208	0.208	0.633	0.024	0.657	0.416	0.841	0.865
LTE Band 41	Bottom Edge	0	0	0.008	0.001	0.003	0.002	0.005	0.009	0.011	0.013
	Left Edge	0	0	0.074	0.020	0.035	0.015	0.050	0.094	0.109	0.124
	Right Edge	0	0	0.063	0.026	0.275	0.019	0.294	0.089	0.338	0.357





f (886-2) 2298-0488



Page: 188 of 255

	Scenario 2: WWAN + WLAN 2.45GHz Ant4												
Position	Conditions	SAR Value	Coordinates (cm)			ΣSAR	Peak Location	SPLSR	Simultaneous Transmission SAR				
FOSITION	Conditions	(W/kg)	х	у	z	(W/kg)	Separation Distance (mm)	OFLOR	Test				
Back Surface	LTE Band 4	1.100	80.40	-63.90	-2.47	-	-	-	-				
Dack Surface	WLAN 2.4G Ant4	0.517	75.20	23.00	-2.45	1.617	87.06	0.024	SPLSR ≤ 0.04, Not required				

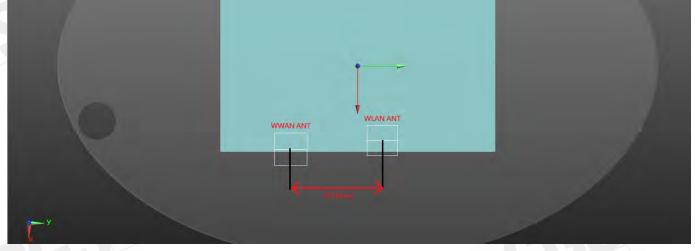




台灣檢驗科技股份有限公司



Page: 189 of 255

	Scenario 4: WWAN + WLAN 5GHz Ant4 + BT Ant4													
Position	Conditions	SAR Value	Co	oordinates (c	m)	ΣSAR	Peak Location	SPLSR	Simultaneous Transmission SAR					
Position	Conditions	(W/kg)	х	у	Z	(W/kg)	Separation Distance (mm)	SPLOK	Test					
	LTE Band 4	1.100	80.40	-63.90	-2.47	-	-		-					
Back Surface	WLAN 5G Ant4	0.575	76.00	47.60	-2.59	1.675	111.59	0.019	SPLSR ≤ 0.04, Not required					
Back Surface -	BT Ant4	0.168	76.60	22.80	-3.36	1.268	86.79	0.016	SPLSR ≤ 0.04, Not required					
	WLAN 5G Ant4 + BT Ant4	0.743	76.60	22.80	-3.36	1.843	86.79	0.029	SPLSR ≤ 0.04, Not required					

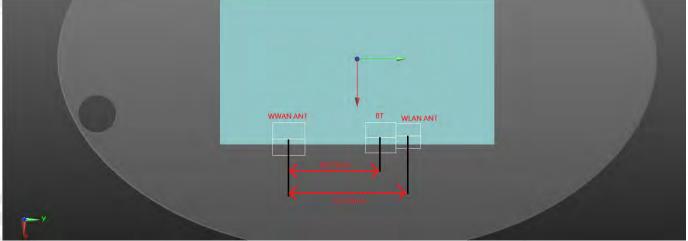

*For peak SAR location of WLAN Ant4 + BT Ant4, using the peak SAR location with smallest separation distance between LTE - WLAN Ant4 pair and LTE - BT Ant4 pair to be the worst case condition.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

所持力有成功 * 地報告記术性到规成之株血程具 * 門中却成体血程体出列人* 全報音术整本公司音曲正可 * 不可能力接致 * This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be responsible to the full extent of the law. prosecuted to the fullest extent of the law.



Page: 190 of 255

	Scenario 2: WWAN + WLAN 2.45GHz Ant4												
Position	Conditions	SAR Value	Coordinates (cm)			ΣSAR	Peak Location	SPLSR	Simultaneous Transmission SAR				
FOSITION	Conditions	(W/kg)	х	у	z	(W/kg)	Separation Distance (mm)	SFLSK	Test				
Back Surface	LTE Band 12	1.186	77.50	-45.00	-2.66	-	-		-				
Dack Surface	WLAN 2.4G Ant4	0.517	75.20	23.00	-2.45	1.703	68.04	0.033	SPLSR ≤ 0.04, Not required				

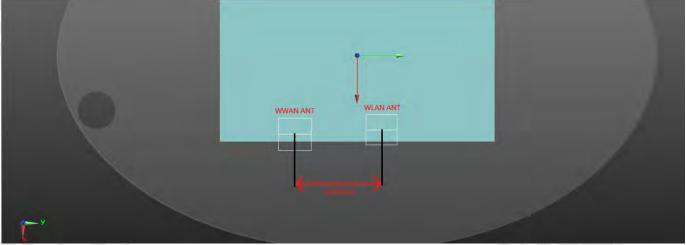


f (886-2) 2298-0488



Page: 191 of 255

	Scenario 4: WWAN + WLAN 5GHz Ant4 + BT Ant4													
Position	Conditions	SAR Value	Coordinates (cm)			ΣSAR	Peak Location	SPLSR	Simultaneous Transmission SAR					
Position	Conditions	(W/kg)	х	у	Z	(W/kg)	Separation Distance (mm)	SPLSK	Test					
	LTE Band 5	0.877	77.40	-51.00	-2.62	-	-		-					
Back Surface	WLAN 5G Ant4	0.575	76.00	47.60	-2.59	1.452	98.61	0.018	SPLSR ≤ 0.04, Not required					
Dack Surface	BT Ant4	0.168	76.60	22.80	-3.36	1.045	73.81	0.014	SPLSR ≤ 0.04, Not required					
	WLAN 5G Ant4 + BT Ant4	0.743	76.60	22.80	-3.36	1.620	73.81	0.028	SPLSR ≤ 0.04, Not required					

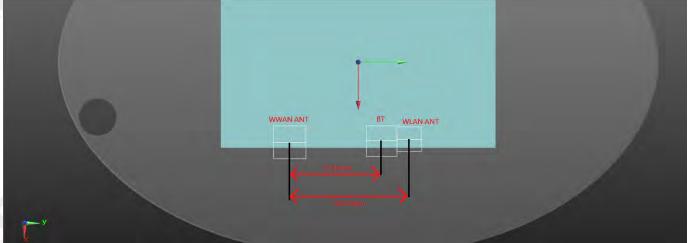

*For peak SAR location of WLAN Ant4 + BT Ant4, using the peak SAR location with smallest separation distance between LTE - WLAN Ant4 pair and LTE - BT Ant4 pair to be the worst case condition.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

所持力有成功 * 地報告記术性到规成之株血程具 * 門中却成体血程体出列人* 全報音术整本公司音曲正可 * 不可能力接致 * This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be responsible to the full extent of the law. prosecuted to the fullest extent of the law.



Page: 192 of 255


	Scenario 2: WWAN + WLAN 2.45GHz Ant4												
Position	Conditions	SAR Value	Coordinates (cm)			ΣSAR	Peak Location	SPLSR	Simultaneous Transmission SAR				
FOSITION	Conditions	(W/kg)	х	у	z	(W/kg)	Separation Distance (mm)	OFLOR	Test				
Back Surface	LTE Band 13	1.120	77.40	-51.00	-2.61	ı	-	-	-				
Dack Surface	WLAN 2.4G Ant4	0.517	75.20	23.00	-2.45	1.637	74.03	0.028	SPLSR ≤ 0.04, Not required				

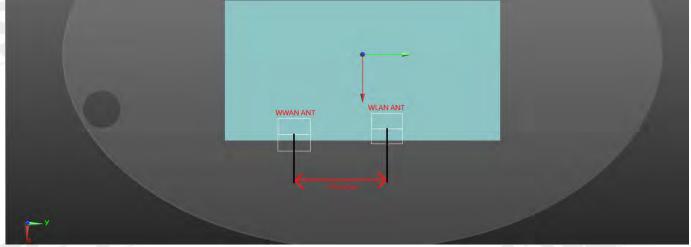



Page: 193 of 255

		So	enario 4: W	WAN + WLA	N 5GHz Ant	4 + BT Ant4			
Position	Conditions	SAR Value	Co	oordinates (c	em)	ΣSAR	Peak Location	SPLSR	Simultaneous Transmission SAR
	Conditions	(W/kg)	х	у	z	(W/kg)	Separation Distance (mm)	SFLSK	Test
	LTE Band 12	1.186	77.50	-45.00	-2.66	-	-	-	-
Back Surface	WLAN 5G Ant4	0.575	76.00	47.60	-2.59	1.761	92.61	0.025	SPLSR ≤ 0.04, Not required
Back Surface	BT Ant4	0.168	76.60	22.80	-3.36	1.354	67.81	0.023	SPLSR ≤ 0.04, Not required
	WLAN 5G Ant4 + BT Ant4	0.743	76.60	22.80	-3.36	1.929	67.81	0.040	SPLSR ≤ 0.04, Not required

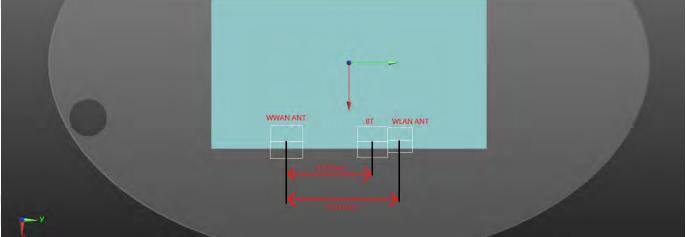

*For peak SAR location of WLAN Ant4 + BT Ant4, using the peak SAR location with smallest separation distance between LTE - WLAN Ant4 pair and LTE - BT Ant4 pair to be the worst case condition.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

所持力有成功 * 地報告記术性到规成之株血程具 * 門中却成体血程体出列人* 全報音术整本公司音曲正可 * 不可能力接致 * This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be responsible to the full extent of the law. prosecuted to the fullest extent of the law.



Page: 194 of 255

		Sc	cenario 4: W	WAN + WLA	N 5GHz Ant	4 + BT Ant4			
Position	Conditions	SAR Value	Co	oordinates (c	m)	ΣSAR	Peak Location	SPLSR	Simultaneous Transmission SAR
		(W/kg)	х	у	z	(W/kg)	Separation Distance (mm)		Test
	LTE Band 13	1.120	77.40	-51.00	-2.61	-	-	-	-
Back Surface	WLAN 5G Ant4	0.575	76.00	47.60	-2.59	1.695	98.61	0.022	SPLSR ≤ 0.04, Not required
Back Surface	BT Ant4	0.168	76.60	22.80	-3.36	1.288	73.81	0.020	SPLSR ≤ 0.04, Not required
	WLAN 5G Ant4 + BT Ant4	0.743	76.60	22.80	-3.36	1.863	73.81	0.034	SPLSR ≤ 0.04, Not required

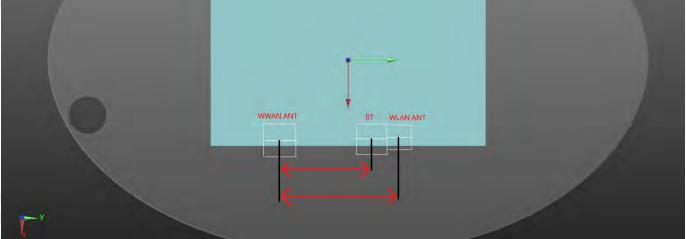

*For peak SAR location of WLAN Ant4 + BT Ant4, using the peak SAR location with smallest separation distance between LTE - WLAN Ant4 pair and LTE - BT Ant4 pair to be the worst case condition.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

所持力有成功 * 地報告記术性到规成之株血程具 * 門中却成体血程体出列人* 全報音术整本公司音曲正可 * 不可能力接致 * This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be responsible to the full extent of the law. prosecuted to the fullest extent of the law.



Page: 195 of 255

		So	cenario 4: W	WAN + WLA	N 5GHz Ant	4 + BT Ant4				
Position	Conditions	SAR Value	Coordinates (cm)			ΣSAR	Peak Location	SPLSR	Simultaneous Transmission SAR	
	Conditions	(W/kg)	х	у	z	(W/kg)	Separation Distance (mm)	OI LOIK	Test	
	LTE Band 4	0.953	-8.10	-60.90	-3.62	-	-	-	-	
Top Edge	WLAN 5G Ant4	0.774	-9.00	59.40	-4.39	1.727	120.31	0.019	SPLSR ≤ 0.04, Not required	
Top Eage	BT Ant4	0.057	-9.20	12.20	-4.74	1.010	73.12	0.014	SPLSR ≤ 0.04, Not required	
	WLAN 5G Ant4 + BT Ant4	0.831	-9.20	12.20	-4.74	1.784	73.12	0.033	SPLSR ≤ 0.04, Not required	

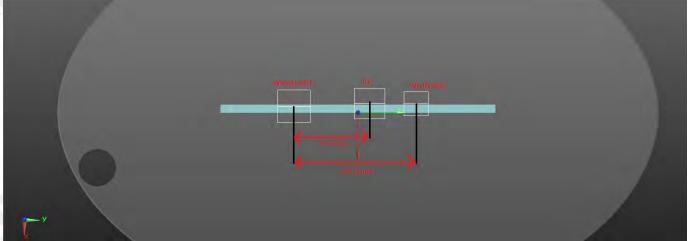

*For peak SAR location of WLAN Ant4 + BT Ant4, using the peak SAR location with smallest separation distance between LTE - WLAN Ant4 pair and LTE - BT Ant4 pair to be the worst case condition.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

所持力有成功 * 地報告記术性到规成之株血程具 * 門中却成体血程体出列人* 全報音术整本公司音曲正可 * 不可能力接致 * This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be responsible to the full extent of the law. prosecuted to the fullest extent of the law.



Page: 196 of 255

		Sc	enario 4: W	WAN + WLA	N 5GHz Ant	4 + BT Ant4				
Position	Conditions	SAR Value	Coordinates (cm)			ΣSAR	Peak Location	SPLSR	Simultaneous Transmission SAR	
	Conditions	(W/kg)	х	у	Z	(W/kg)	Separation Distance (mm)	SPLSK	Test	
	LTE Band 13	0.861	-6.50	-52.50	-3.68	-	-	-	-	
Top Edge	WLAN 5G Ant4	0.774	-9.00	59.40	-4.39	1.635	111.93	0.019	SPLSR ≤ 0.04, Not required	
Top Eage	BT Ant4	0.057	-9.20	12.20	-4.74	0.918	64.76	0.014	SPLSR ≤ 0.04, Not required	
	WLAN 5G Ant4 + BT Ant4	0.831	-9.20	12.20	-4.74	1.692	64.76	0.034	SPLSR ≤ 0.04, Not required	

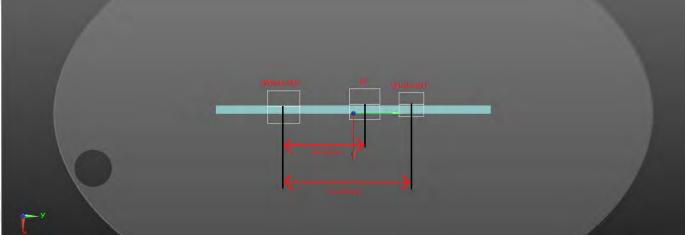

*For peak SAR location of WLAN Ant4 + BT Ant4, using the peak SAR location with smallest separation distance between LTE - WLAN Ant4 pair and LTE - BT Ant4 pair to be the worst case condition.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

所持力有成功 * 地報告記术性到规成之株血程具 * 門中却成体血程体出列人* 全報音术整本公司音曲正可 * 不可能力接致 * This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be responsible to the full extent of the law. prosecuted to the fullest extent of the law.



Page: 197 of 255

		So	enario 4: W	WAN + WLA	N 5GHz Ant	4 + BT Ant4			
Position	Conditions	SAR Value	Coordinates (cm)			ΣSAR	Peak Location	SPLSR	Simultaneous Transmission SAR
	Conditions	(W/kg)	х	у	z	(W/kg)	Separation Distance (mm)	SFLSK	Test
	LTE Band 66	0.819	-8.10	-60.90	-3.65	-	-	-	-
Top Edge	WLAN 5G Ant4	0.774	-9.00	59.40	-4.39	1.593	120.31	0.017	SPLSR ≤ 0.04, Not required
Top Eage	BT Ant4	0.057	-9.20	12.20	-4.74	0.876	73.12	0.011	SPLSR ≤ 0.04, Not required
	WLAN 5G Ant4 + BT Ant4	0.831	-9.20	12.20	-4.74	1.650	73.12	0.029	SPLSR ≤ 0.04, Not required

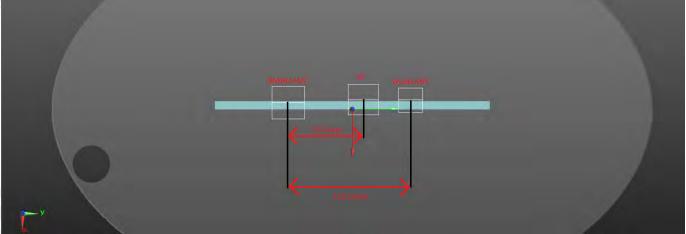

*For peak SAR location of WLAN Ant4 + BT Ant4, using the peak SAR location with smallest separation distance between LTE - WLAN Ant4 pair and LTE - BT Ant4 pair to be the worst case condition.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

所持力有成功 * 地報告記术性到规成之株血程具 * 門中却成体血程体出列人* 全報音术整本公司音曲正可 * 不可能力接致 * This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be responsible to the full extent of the law. prosecuted to the fullest extent of the law.



Page: 198 of 255

		Scenario 4	4: WWAN +	WLAN 5GHz	Ant4_15mn	n + BT Ant4_1	5mm		
Position	Conditions	SAR Value	Co	oordinates (c	m)	ΣSAR	Peak Location	SPLSR	Simultaneous Transmission SAR
		(W/kg)	х	у	z	(W/kg)	Separation Distance (mm)	SFLSK	Test
	LTE Band 4	0.953	-8.10	-60.90	-3.62	-	-	-	-
Top Edge	WLAN 5G Ant4_15mm	0.633	-10.00	53.20	-4.39	1.586	114.12	0.018	SPLSR ≤ 0.04, Not required
Top Eage	BT Ant4_15mm	0.024	-8.00	3.80	-4.53	0.977	64.71	0.015	SPLSR ≤ 0.04, Not required
	WLAN 5G Ant4_15mm + BT Ant4_15mm	0.657	-8.00	3.80	-4.53	1.610	64.71	0.032	SPLSR ≤ 0.04, Not required

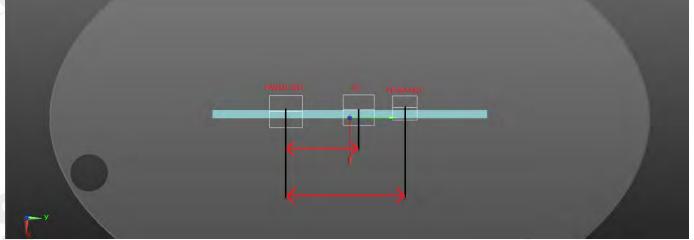

*For peak SAR location of WLAN Ant4 + BT Ant4, using the peak SAR location with smallest separation distance between LTE - WLAN Ant4 pair and LTE - BT Ant4 pair to be the worst case condition.

7.4 Conclusion

The simultaneous transmission is compliant because both SAR sum and/or SPLSR are less than their corresponding criteria.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

SGS Taiwan Ltd

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279 f (886-2) 2298-0488

www.sgs.com.tw



Page: 199 of 255

INSTRUMENTS LIST

		SAR Te	st Site: SAR_3			
Manufacturer	Device	Туре	Serial number	Date of last calibration	Date of next calibration	
SPEAG	Dosimetric E-Field Probe	EX3DV4	7686	Oct/05/2021	Oct/04/2022	
SPEAG	System Validation Dipole	D750V3	1015	Oct/14/2021	Oct/13/2022	
SPEAG	System Validation Dipole	D835V2	4d063	Oct/18/2021	Oct/17/2022	
SPEAG	System Validation Dipole	D1750V2	1008	Oct/19/2021	Oct/18/2022	
SPEAG	System Validation Dipole	D1900V2	5d173	Apr/28/2022	Apr/27/2023	
SPEAG	System Validation Dipole	D2450V2	727	Apr/25/2022	Apr/24/2023	
SPEAG	System Validation Dipole	D2600V2	1005	Jan/18/2022	Jan/17/2023	
SPEAG	System Validation Dipole	D5GHzV2	1023	Jan/27/2022	Jan/26/2023	
SPEAG	Data acquisition Electronics	DAE4	1665	Feb/28/2022	Feb/27/2023	
SPEAG	Software	DASY 52 V52.10.4	N/A	Calibration not required	Calibration no required	
SPEAG	Phantom	ELI	N/A	Calibration not required	Calibration no required	
R&S	Radio Communication Test	CMW 500	165070	Oct/12/2021	Oct/11/2022	
SPEAG	Dielectric Assessment Kit	DAKS-3.5	1053	Feb/28/2022	Feb/27/2023	
Agilent	Dual-directional coupler	772D	MY52180142	Nov/02/2021	Nov/01/2022	
Agilent	Dual-directional coupler	778D	MY52180302	Oct/29/2021	Oct/28/2022	
EMCI	Amplifier	ZHL-42	980189	Calibration not required	Calibration no required	
EMCI	Amplifier	ZVE-8G	980190	Calibration not required	Calibration no required	
R&S	MXG Analog Signal Generator	SMB100A03	182996	Dec/08/2021	Dec/07/2022	
R&S	Power Meter	NRX	102191	Jan/22/2022	Jan/21/2023	
R&S	Power Sensor	NRP18S	101358	Jan/22/2022	Jan/21/2023	
R&S	Power Sensor	NRP18S	109065	Oct/12/2021	Oct/11/2022	
LKM	Digital thermometer	DTM3000	EC14010603	Nov/09/2021	Nov/08/2022	
TECPEL	Digital thermometer	DTM-303A	TP190085	Jan/14/2022	Jan/13/2023	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at the times-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of locuments in the limits of liability, indemnification and purisdiction issues to the company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 200 of 255

UNCERTAINTY BUDGET

Measurement Uncertainty evaluation template for DUT SAR test (3-6G)

A	С	D	е		f	g	h=c * f / e	i=c * g / e	k
Source of Uncertainty	Tolerance/ Uncertainty	Probability Distributio	Div	Div Value	ci (1g)	ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Vef
Measurement system									
Probe calibration	6.55%	N	1	1	1	1	6.55%	6.55%	8
Isotropy , Axial	3.50%	R	√3	1.732	1	1	2.02%	2.02%	8
lsotropy, Hemispherical	9.60%	R	√3	1.732	1	1	5.54%	5.54%	8
Modulation Response	2.40%	R	√3	1.732	1	1	1.40%	1.40%	8
Boundary Effect	1.00%	R	√3	1.732	1	1	0.58%	0.58%	8
Linearity	4.70%	R	√3	1.732	1	1	2.71%	2.71%	8
Detection Limits	1.00%	R	√3	1.732	1	1	0.58%	0.58%	8
Readout Electronics	0.30%	N	1	1	1	1	0.30%	0.30%	8
Response time	0.80%	R	√3	1.732	1	1	0.46%	0.46%	8
Integration Time	2.60%	R	√3	1.732	1	1	1.50%	1.50%	8
Measurement drift (class A evaluation)	1.75%	R	√3	1.732	1	1	1.01%	1.01%	8
RF ambient condition - noise	3.00%	R	√3	1.732	1	1	1.73%	1.73%	8
RF ambient conditions - reflections	3.00%	R	√3	1.732	1	1	1.73%	1.73%	80
Probe positioner Mechanical restrictions	0.40%	R	√3	1.732	1	1	0.23%	0.23%	8
Probe Positioning with respect to phantom shell	2.90%	R	√3	1.732	1	1	1.67%	1.67%	8
Post-processing	1.00%	R	√3	1.732	1	1	0.58%	0.58%	8
Max SAR Eval	1.00%	R	√3	1.732	1	1	0.58%	0.58%	8
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	√3	1.732	1	1	2.89%	2.89%	8
Phantom and Setup									
Phantom Uncertainty	4.00%	R	√3	1.732	1	1	2.31%	2.31%	œ
Liquid permittivity (mea.)	1.45%	N	1	1	0.64	0.43	0.93%	0.62%	М
Liquid Conductivity (mea.)	1.15%	N	1	1	0.6	0.49	0.69%	0.56%	М
Combined standard uncertainty		RSS					11.77%	11.74%	
Expant uncertainty (95% confidence interval), K=2							23.55%	23.47%	



Page: 201 of 255

Measurement Uncertainty evaluation template for DUT SAR test (0.3-3G)

A	С	D	е		f	g	h=c * f / e	i=c * g / e	k
Source of Uncertainty	Tolerance/ Uncertainty	Probability Distributio	Div	Div Value	ci (1g)	ci (10g)	Standard uncertainty	Standard uncertainty	vi, or Vef
Measurement system									
Probe calibration	6.00%	N	1	1	1	1	6.00%	6.00%	∞
lsotropy , Axial	3.50%	R	√3	1.732	1	1	2.02%	2.02%	∞
lsotropy, Hemispherical	9.60%	R	√3	1.732	1	1	5.54%	5.54%	∞
Modulation Response	2.40%	R	√3	1.732	1	1	1.40%	1.40%	∞
Boundary Effect	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Linearity	4.70%	R	√3	1.732	1	1	2.71%	2.71%	∞
Detection Limits	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Readout Electronics	0.30%	N	1	1	1	1	0.30%	0.30%	∞
Response time	0.80%	R	√3	1.732	1	1	0.46%	0.46%	∞
Integration Time	2.60%	R	√3	1.732	1	1	1.50%	1.50%	∞
Measurement drift (class A evaluation)	1.75%	R	√3	1.732	1	1	1.01%	1.01%	∞
RF ambient condition -	3.00%	R	√3	1.732	1	1	1.73%	1.73%	∞
RF ambient conditions - reflections	3.00%	R	√3	1.732	1	1	1.73%	1.73%	∞
Probe positioner Mechanical restrictions	0.40%	R	√3	1.732	1	1	0.23%	0.23%	∞
Probe Positioning with respect to phantom shell	2.90%	R	√3	1.732	1	1	1.67%	1.67%	∞
Post-processing	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Max SAR Eval	1.00%	R	√3	1.732	1	1	0.58%	0.58%	∞
Test Sample related									
Test sample positioning	2.90%	N	1	1	1	1	2.90%	2.90%	M-1
Device Holder Uncertainty	3.60%	N	1	1	1	1	3.60%	3.60%	M-1
Drift of output power	5.00%	R	√3	1.732	1	1	2.89%	2.89%	∞
Phantom and Setup	-								
Phantom Uncertainty	4.00%	R	√3	1.732	1	1	2.31%	2.31%	∞
Liquid permittivity (mea.)	1.25%	N	1	1	0.64	0.43	0.80%	0.54%	М
Liquid Conductivity (mea.)	0.97%	N	1	1	0.6	0.49	0.58%	0.48%	М
Combined standard uncertainty		RSS					11.46%	11.43%	
Expant uncertainty (95% confidence interval), K=2							22.92%	22.86%	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SCST Stawan Ltd. No 134 Wit King Road New Taipoi Industrial Park Withu District New Taipoi City, Taipon City, Taipon



Page: 202 of 255

10 SAR MEASUREMENT RESULTS

Date: 2022/8/11

ID: 001

Report No.: TESA2207000200ES

GPRS 850_Body_Back Surface_CH 190_16mm_Ant1

Communication System: GPRS (1Dn4Up); Frequency: 836.6 MHz; Duty cycle= 1:2 Medium parameters used: f = 837 MHz; $\sigma = 0.898$ S/m; $\varepsilon_r = 41.02$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.3°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(10.36, 10.36, 10.36); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x91x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.427 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.350 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 0.491 W/kg

SAR(1 g) = 0.305 W/kg; SAR(10 g) = 0.191 W/kg

Smallest distance from peaks to all points 3 dB below = 17.2 mm

Ratio of SAR at M2 to SAR at M1 = 63.2%

Maximum value of SAR (measured) = 0.399 W/kg

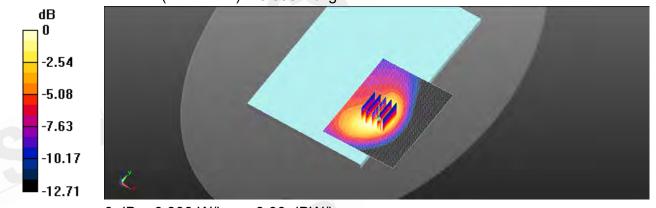

0 dB = 0.399 W/kg = -3.99 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 203 of 255

Date: 2022/8/13

ID: 002

Report No.: TESA2207000200ES

GPRS 1900_Body_Back Surface_CH 661_16mm_Ant1

Communication System: GPRS (1Dn4Up); Frequency: 1880 MHz; Duty cycle= 1:2 Medium parameters used: f = 1880 MHz; $\sigma = 1.404 \text{ S/m}$; $\varepsilon_r = 40.22$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(8.83, 8.83, 8.83); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x91x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.651 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.506 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.873 W/kg

SAR(1 g) = 0.490 W/kg; SAR(10 g) = 0.260 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 57%

Maximum value of SAR (measured) = 0.686 W/kg

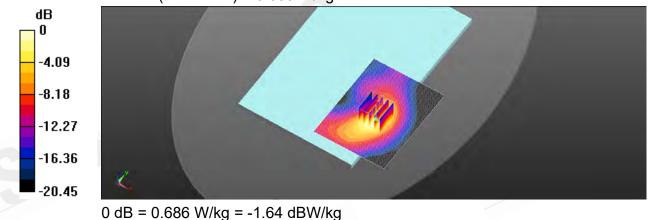

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 204 of 255

Date: 2022/8/13

ID: 003

Report No.: TESA2207000200ES

WCDMA Band II_Body_Back Surface_CH 9400_16mm_Ant1

Communication System: WCDMA; Frequency: 1880 MHz; Duty cycle= 1:1

Medium parameters used: f = 1880 MHz; $\sigma = 1.404 \text{ S/m}$; $\varepsilon_r = 40.22$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(8.83, 8.83, 8.83); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x91x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 1.04 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.083 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.805 W/kg; SAR(10 g) = 0.425 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 58.5%

Maximum value of SAR (measured) = 1.09 W/kg

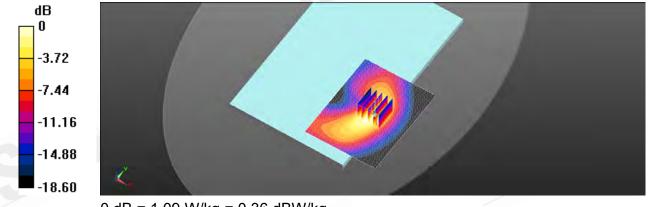

0 dB = 1.09 W/kg = 0.36 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 205 of 255

Date: 2022/8/12

ID: 004

Report No.: TESA2207000200ES

WCDMA Band IV_Body_Back Surface_CH 1513_16mm_Ant1

Communication System: WCDMA; Frequency: 1752.6 MHz; Duty cycle= 1:1

Medium parameters used: f = 1753 MHz; $\sigma = 1.377$ S/m; $\varepsilon_r = 40.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.6°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(9.16, 9.16, 9.16); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x91x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.788 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.159 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.607 W/kg; SAR(10 g) = 0.326 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 59.6%

Maximum value of SAR (measured) = 0.820 W/kg

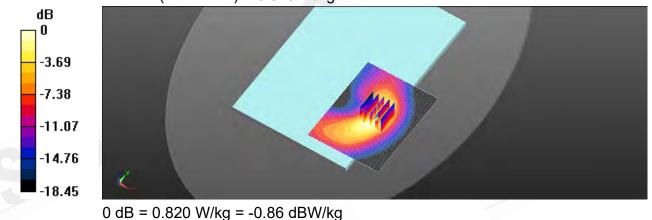

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 206 of 255

Date: 2022/8/11

ID: 005

Report No.: TESA2207000200ES

WCDMA Band V_Body_Back Surface_CH 4183_16mm_Ant1

Communication System: WCDMA; Frequency: 836.6 MHz; Duty cycle= 1:1

Medium parameters used: f = 837 MHz; $\sigma = 0.898 \text{ S/m}$; $\varepsilon_r = 41.02$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.3°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(10.36, 10.36, 10.36); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x91x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.493 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.018 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 0.643 W/kg

SAR(1 g) = 0.386 W/kg; SAR(10 g) = 0.236 W/kg

Smallest distance from peaks to all points 3 dB below = 12.9 mm

Ratio of SAR at M2 to SAR at M1 = 60.6%

Maximum value of SAR (measured) = 0.519 W/kg

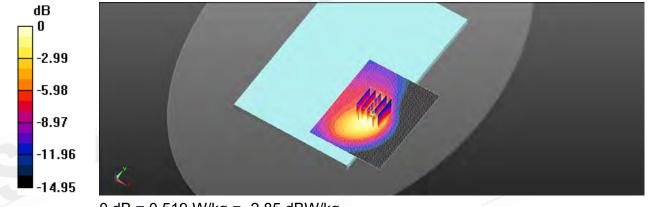

0 dB = 0.519 W/kg = -2.85 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 207 of 255

Date: 2022/8/13

ID: 006

Report No.: TESA2207000200ES

LTE Band 2 (20MHz)_Body_Back Surface_CH 18700_QPSK_1-0_16mm_Ant1

Communication System: LTE; Frequency: 1860 MHz; Duty cycle= 1:1

Medium parameters used: f = 1860 MHz; σ = 1.403 S/m; ε_r = 40.224; ρ = 1000 kg/m³

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(8.83, 8.83, 8.83); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x91x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 1.08 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.814 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 1.46 W/kg

SAR(1 g) = 0.828 W/kg; SAR(10 g) = 0.446 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 58.9%

Maximum value of SAR (measured) = 1.12 W/kg

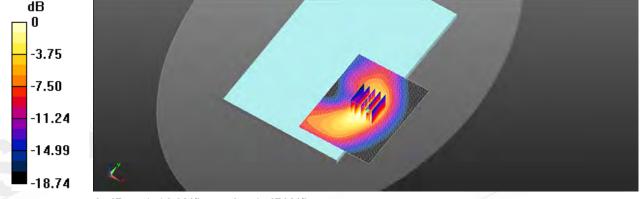

0 dB = 1.12 W/kg = 0.51 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 208 of 255

Date: 2022/8/12

ID: 007

Report No.: TESA2207000200ES

LTE Band 4 (20MHz)_Body_Back Surface_CH 20050_QPSK_1-0_16mm_Ant1

Communication System: LTE; Frequency: 1720 MHz; Duty cycle= 1:1

Medium parameters used: f = 1720 MHz; σ = 1.358 S/m; ε_r = 40.359; ρ = 1000 kg/m³

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.6°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(9.16, 9.16, 9.16); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x91x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.659 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.496 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 0.876 W/kg

SAR(1 g) = 0.508 W/kg; SAR(10 g) = 0.277 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 61.2%

Maximum value of SAR (measured) = 0.666 W/kg

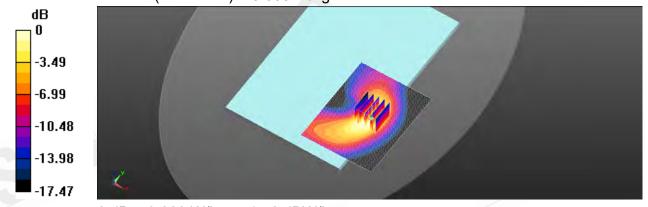

0 dB = 0.666 W/kg = -1.76 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 209 of 255

Date: 2022/8/11

ID: 008

Report No.: TESA2207000200ES

LTE Band 5 (10MHz)_Body_Back Surface_CH 20525_QPSK_1-0_16mm_Ant1

Communication System: LTE; Frequency: 836.5 MHz; Duty cycle= 1:1

Medium parameters used: f = 836.5 MHz; $\sigma = 0.898 \text{ S/m}$; $\varepsilon_r = 41.021$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.3°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(10.36, 10.36, 10.36); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x91x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.313 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.538 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.387 W/kg

SAR(1 g) = 0.242 W/kg; SAR(10 g) = 0.152 W/kg

Smallest distance from peaks to all points 3 dB below = 15.8 mm

Ratio of SAR at M2 to SAR at M1 = 62.9%

Maximum value of SAR (measured) = 0.315 W/kg

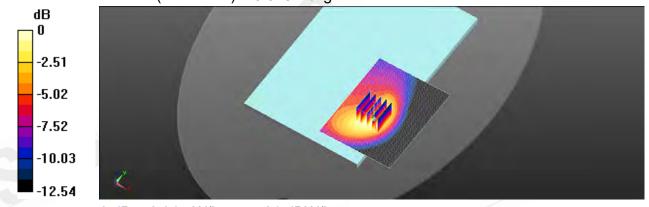

0 dB = 0.315 W/kg = -5.01 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 210 of 255

Date: 2022/8/10

ID: 009

Report No.: TESA2207000200ES

LTE Band 12 (10MHz)_Body_Back Surface_CH 23060_QPSK_1-0_16mm_Ant1

Communication System: LTE; Frequency: 704 MHz; Duty cycle= 1:1

Medium parameters used: f = 704 MHz; $\sigma = 0.882$ S/m; $\varepsilon_r = 41.627$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.6°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(10.73, 10.73, 10.73); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x91x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.326 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.049 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.398 W/kg

SAR(1 g) = 0.232 W/kg; SAR(10 g) = 0.144 W/kg

Smallest distance from peaks to all points 3 dB below = 19.5 mm

Ratio of SAR at M2 to SAR at M1 = 65.7%

Maximum value of SAR (measured) = 0.312 W/kg

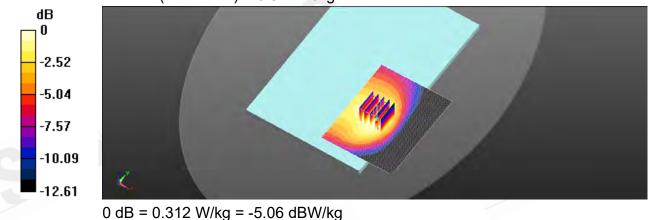

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 211 of 255

Date: 2022/8/10

ID: 010

Report No.: TESA2207000200ES

LTE Band 13 (10MHz)_Body_Back Surface_CH 23230_QPSK_1-0_16mm_Ant1

Communication System: LTE; Frequency: 782 MHz; Duty cycle= 1:1

Medium parameters used: f = 782 MHz; $\sigma = 0.889 \text{ S/m}$; $\epsilon_r = 41.232$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.6°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(10.73, 10.73, 10.73); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x91x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.335 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.535 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.412 W/kg

SAR(1 g) = 0.260 W/kg; SAR(10 g) = 0.166 W/kg

Smallest distance from peaks to all points 3 dB below = 17.3 mm

Ratio of SAR at M2 to SAR at M1 = 63.7%

Maximum value of SAR (measured) = 0.336 W/kg

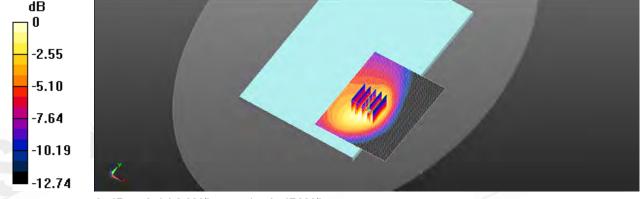

0 dB = 0.336 W/kg = -4.73 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 212 of 255

Date: 2022/8/13

ID: 011

Report No.: TESA2207000200ES

LTE Band 25 (20MHz)_Body_Back Surface_CH 26365_QPSK_1-0_16mm_Ant1

Communication System: LTE; Frequency: 1882.5 MHz; Duty cycle= 1:1

Medium parameters used: f = 1882.5 MHz; $\sigma = 1.405 \text{ S/m}$; $\varepsilon_r = 40.215$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(8.83, 8.83, 8.83); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x91x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.806 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.395 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.593 W/kg; SAR(10 g) = 0.316 W/kg

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 57.2%

Maximum value of SAR (measured) = 0.832 W/kg

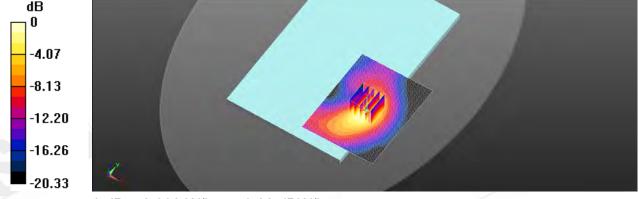

0 dB = 0.832 W/kg = -0.80 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 213 of 255

Date: 2022/8/11

ID: 012

Report No.: TESA2207000200ES

LTE Band 26 (15MHz)_Body_Back Surface_CH 26865_QPSK_1-0_16mm_Ant1

Communication System: LTE; Frequency: 831.5 MHz; Duty cycle= 1:1

Medium parameters used: f = 831.5 MHz; $\sigma = 0.897 \text{ S/m}$; $\varepsilon_r = 41.027$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.3°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(10.36, 10.36, 10.36); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x91x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.318 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.967 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 0.396 W/kg

SAR(1 g) = 0.247 W/kg; SAR(10 g) = 0.155 W/kg

Smallest distance from peaks to all points 3 dB below = 15.8 mm

Ratio of SAR at M2 to SAR at M1 = 62.8%

Maximum value of SAR (measured) = 0.323 W/kg

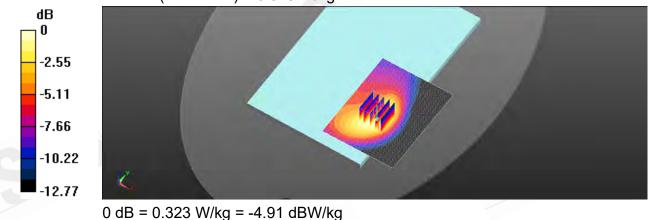

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 214 of 255

Date: 2022/8/12

ID: 013

Report No.: TESA2207000200ES

LTE Band 66 (20MHz)_Body_Back Surface_CH 132322_QPSK_1-0_16mm_Ant1

Communication System: LTE; Frequency: 1745 MHz; Duty cycle= 1:1

Medium parameters used: f = 1745 MHz; σ = 1.372 S/m; ε_r = 40.307; ρ = 1000 kg/m³

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.6°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(9.16, 9.16, 9.16); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x91x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.741 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.102 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 0.992 W/kg

SAR(1 g) = 0.574 W/kg; SAR(10 g) = 0.313 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 61.2%

Maximum value of SAR (measured) = 0.749 W/kg

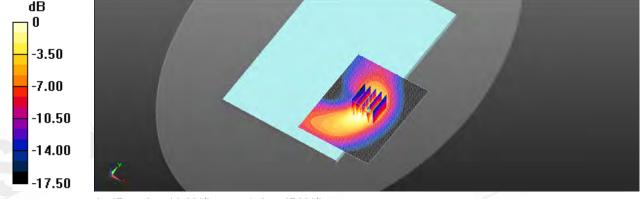

0 dB = 0.749 W/kg = -1.25 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sas.com.tw



Page: 215 of 255

Date: 2022/8/15

ID: 014

Report No.: TESA2207000200ES

LTE Band 7 (20MHz)_Body_Back Surface_CH 20850_QPSK_1-0_12mm_Ant2

Communication System: LTE; Frequency: 2510 MHz; Duty cycle= 1:1

Medium parameters used: f = 2510 MHz; $\sigma = 1.882 \text{ S/m}$; $\varepsilon_r = 39.574$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.5°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(8.02, 8.02, 8.02); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x111x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 1.04 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.111 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.726 W/kg; SAR(10 g) = 0.399 W/kg

Smallest distance from peaks to all points 3 dB below = 13.4 mm

Ratio of SAR at M2 to SAR at M1 = 48.2%

Maximum value of SAR (measured) = 1.03 W/kg

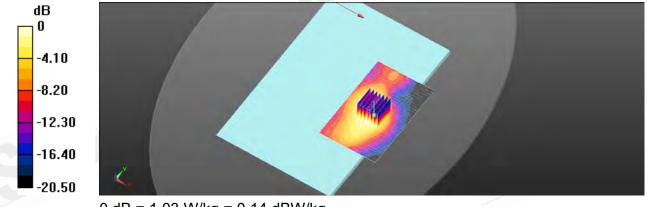

0 dB = 1.03 W/kg = 0.14 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 216 of 255

Date: 2022/8/15

ID: 015

Report No.: TESA2207000200ES

LTE Band 38 (20MHz)_Body_Back Surface_CH 37850_QPSK_1-0_12mm_Ant2

Communication System: LTE; Frequency: 2580 MHz; Duty cycle= 1:1.58

Medium parameters used: f = 2580 MHz; $\sigma = 1.955 \text{ S/m}$; $\varepsilon_r = 39.511$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.5°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(8.02, 8.02, 8.02); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (91x121x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.626 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.689 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 0.842 W/kg

SAR(1 g) = 0.400 W/kg; SAR(10 g) = 0.214 W/kg

Smallest distance from peaks to all points 3 dB below = 12.1 mm

Ratio of SAR at M2 to SAR at M1 = 46.1%

Maximum value of SAR (measured) = 0.599 W/kg

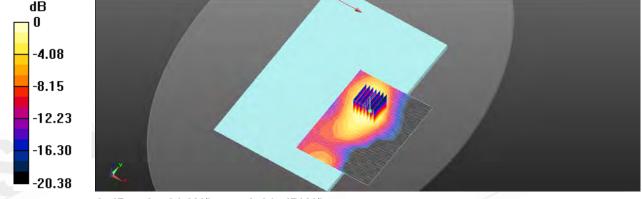

0 dB = 0.599 W/kg = -2.23 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 217 of 255

Date: 2022/8/15

ID: 016

Report No.: TESA2207000200ES

LTE Band 41 (20MHz)_Body_Back Surface_CH 40620_QPSK_1-0_12mm_Ant2

Communication System: LTE; Frequency: 2593 MHz; Duty cycle= 1:1.58

Medium parameters used: f = 2593 MHz; $\sigma = 1.97$ S/m; $\varepsilon_r = 39.477$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.5°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(8.02, 8.02, 8.02); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (91x121x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.730 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.948 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 0.988 W/kg

SAR(1 g) = 0.474 W/kg; SAR(10 g) = 0.253 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 46.1%

Maximum value of SAR (measured) = 0.701 W/kg

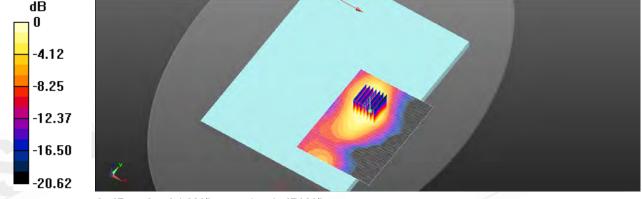

0 dB = 0.701 W/kg = -1.54 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 218 of 255

Date: 2022/8/11

ID: 017

Report No.: TESA2207000200ES

GPRS 850_Body_Back Surface_CH 190_0mm Ant1

Communication System: GPRS (1Dn4Up); Frequency: 836.6 MHz; Duty cycle= 1:2 Medium parameters used: f = 837 MHz; $\sigma = 0.898$ S/m; $\varepsilon_r = 41.02$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.3°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(10.36, 10.36, 10.36); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x91x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.602 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.255 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 1.55 W/kg

SAR(1 g) = 0.590 W/kg; SAR(10 g) = 0.267 W/kg

Smallest distance from peaks to all points 3 dB below = 8.7 mm

Ratio of SAR at M2 to SAR at M1 = 45.2%

Maximum value of SAR (measured) = 0.823 W/kg

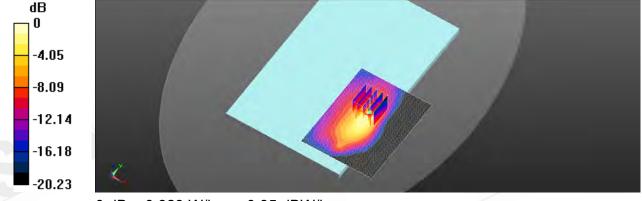

0 dB = 0.823 W/kg = -0.85 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sas.com.tw



Page: 219 of 255

Date: 2022/8/13

ID: 018

Report No.: TESA2207000200ES

GPRS 1900_Body_Back Surface_CH 512_0mm_Ant1

Communication System: GPRS (1Dn4Up); Frequency: 1850.2 MHz; Duty cycle= 1:2 Medium parameters used: f = 1850.2 MHz; $\sigma = 1.402 \text{ S/m}$; $\varepsilon_r = 40.243$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(8.83, 8.83, 8.83); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x101x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.794 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.236 V/m; Power Drift = -0.19 dB


Peak SAR (extrapolated) = 1.40 W/kg

SAR(1 g) = 0.609 W/kg; SAR(10 g) = 0.253 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 46.3%

Maximum value of SAR (measured) = 0.984 W/kg

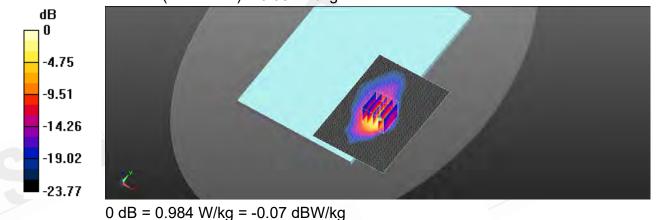

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 220 of 255

Date: 2022/8/13

ID: 019

Report No.: TESA2207000200ES

WCDMA Band II_Body_Back Surface_CH 9262_0mm_Ant1

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty cycle= 1:1

Medium parameters used: f = 1852.4 MHz; $\sigma = 1.402 \text{ S/m}$; $\varepsilon_r = 40.236$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(8.83, 8.83, 8.83); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x91x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 1.19 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.256 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.654 W/kg; SAR(10 g) = 0.269 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 43%

Maximum value of SAR (measured) = 1.16 W/kg

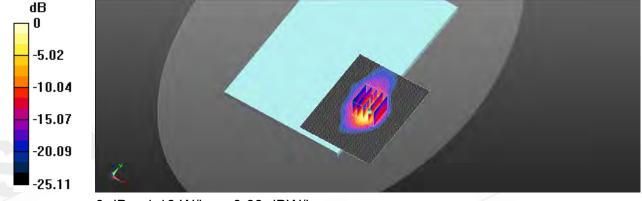

0 dB = 1.16 W/kg = 0.63 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 221 of 255

Date: 2022/8/12

ID: 020

Report No.: TESA2207000200ES

WCDMA Band IV_Body_Back Surface_CH 1513_0mm_Ant1

Communication System: WCDMA; Frequency: 1752.6 MHz; Duty cycle= 1:1

Medium parameters used: f = 1753 MHz; $\sigma = 1.377$ S/m; $\varepsilon_r = 40.29$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.6°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(9.16, 9.16, 9.16); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x91x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.660 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.254 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.843 W/kg

SAR(1 g) = 0.362 W/kg; SAR(10 g) = 0.151 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 42.9%

Maximum value of SAR (measured) = 0.641 W/kg

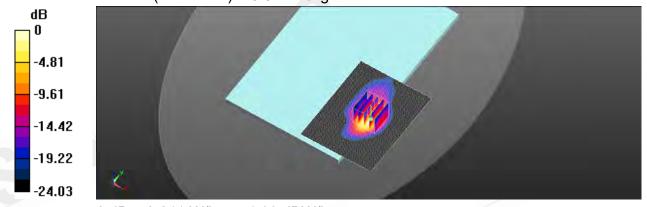

0 dB = 0.641 W/kg = -1.93 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 222 of 255

Date: 2022/8/11

ID: 021

Report No.: TESA2207000200ES

WCDMA Band V_Body_Back Surface_CH 4233_0mm_Ant1

Communication System: WCDMA; Frequency: 846.6 MHz; Duty cycle= 1:1

Medium parameters used: f = 847 MHz; $\sigma = 0.908$ S/m; $\varepsilon_r = 40.994$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.3°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(10.36, 10.36, 10.36); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x91x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.779 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.493 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 0.547 W/kg; SAR(10 g) = 0.249 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 45.8%

Maximum value of SAR (measured) = 0.998 W/kg

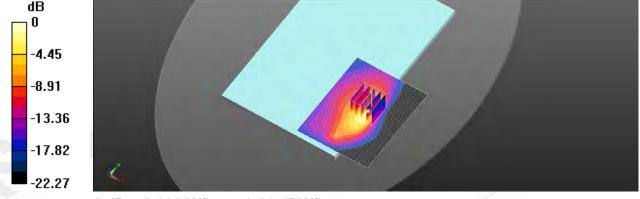

0 dB = 0.998 W/kg = -0.01 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 223 of 255

Date: 2022/8/13

ID: 022

Report No.: TESA2207000200ES

LTE Band 2 (20MHz)_Body_Back Surface_CH 18900_QPSK_1-0_0mm_Ant1

Communication System: LTE; Frequency: 1880 MHz; Duty cycle= 1:1

Medium parameters used: f = 1880 MHz; $\sigma = 1.404 \text{ S/m}$; $\varepsilon_r = 40.22$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(8.83, 8.83, 8.83); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (51x91x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 1.12 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.214 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.587 W/kg; SAR(10 g) = 0.234 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 47.5%

Maximum value of SAR (measured) = 1.09 W/kg

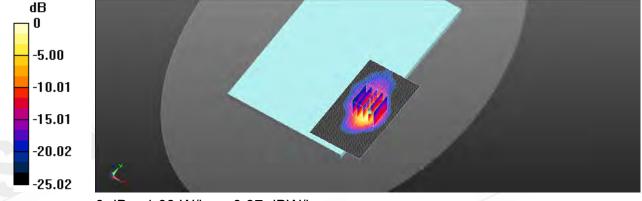

0 dB = 1.09 W/kg = 0.37 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 224 of 255

Date: 2022/8/12

ID: 023

Report No.: TESA2207000200ES

LTE Band 4 (20MHz)_Body_Back Surface_CH 20050_QPSK_1-0_0mm_Ant1

Communication System: LTE; Frequency: 1720 MHz; Duty cycle= 1:1

Medium parameters used: f = 1720 MHz; σ = 1.358 S/m; ε_r = 40.359; ρ = 1000 kg/m³

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.6°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(9.16, 9.16, 9.16); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x91x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 1.47 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.332 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 2.43 W/kg

SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.463 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 44.7%

Maximum value of SAR (measured) = 1.80 W/kg

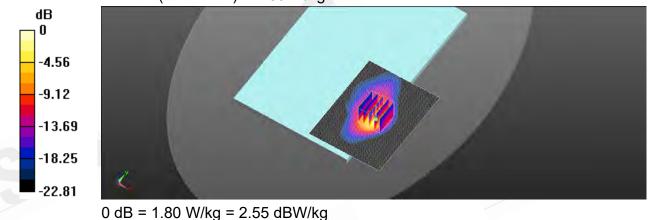

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 225 of 255

Date: 2022/8/11

ID: 024

Report No.: TESA2207000200ES

LTE Band 5 (10MHz)_Body_Back Surface_CH 20450_QPSK_1-0_0mm_Ant1

Communication System: LTE; Frequency: 829 MHz; Duty cycle= 1:1

Medium parameters used: f = 829 MHz; $\sigma = 0.896$ S/m; $\varepsilon_r = 41.038$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.3°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(10.36, 10.36, 10.36); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x91x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.735 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.574 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 2.17 W/kg

SAR(1 g) = 0.771 W/kg; SAR(10 g) = 0.353 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 47.9%

Maximum value of SAR (measured) = 1.37 W/kg

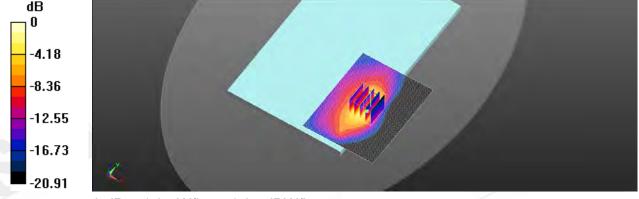

0 dB = 1.37 W/kg = 1.37 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 226 of 255

Date: 2022/8/10

ID: 025

Report No.: TESA2207000200ES

LTE Band 12 (10MHz)_Body_Back Surface_CH 23060_QPSK_1-0_0mm_Ant1

Communication System: LTE; Frequency: 704 MHz; Duty cycle= 1:1

Medium parameters used: f = 704 MHz; $\sigma = 0.882$ S/m; $\varepsilon_r = 41.627$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.6°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(10.73, 10.73, 10.73); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x91x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 1.14 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.636 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 3.63 W/kg

SAR(1 g) = 1.17 W/kg; SAR(10 g) = 0.528 W/kg

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 47.8%

Maximum value of SAR (measured) = 2.28 W/kg

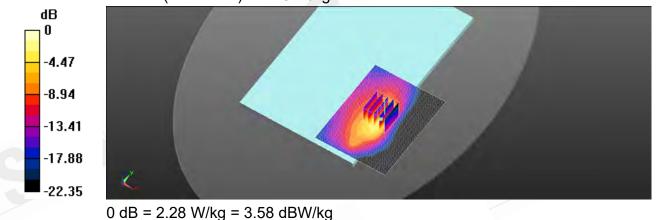

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 227 of 255

Date: 2022/8/10

ID: 026

Report No.: TESA2207000200ES

LTE Band 13 (10MHz)_Body_Back Surface_CH 23230_QPSK_1-0_0mm_Ant1

Communication System: LTE; Frequency: 782 MHz; Duty cycle= 1:1

Medium parameters used: f = 782 MHz; $\sigma = 0.889 \text{ S/m}$; $\epsilon_r = 41.232$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.6°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(10.73, 10.73, 10.73); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x91x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.947 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.085 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 2.83 W/kg

SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.552 W/kg

Smallest distance from peaks to all points 3 dB below = 8.7 mm

Ratio of SAR at M2 to SAR at M1 = 47.1%

Maximum value of SAR (measured) = 1.73 W/kg

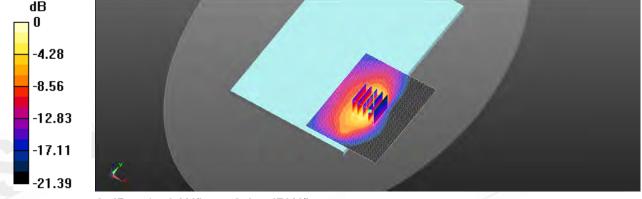

0 dB = 1.73 W/kg = 2.37 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 www.sas.com.tw

t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 228 of 255

Date: 2022/8/13

ID: 027

Report No.: TESA2207000200ES

LTE Band 25 (20MHz)_Body_Back Surface_CH 26365_QPSK_1-0_0mm_Ant1

Communication System: LTE; Frequency: 1882.5 MHz; Duty cycle= 1:1

Medium parameters used: f = 1882.5 MHz; $\sigma = 1.405 \text{ S/m}$; $\varepsilon_r = 40.215$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(8.83, 8.83, 8.83); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x91x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.895 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.143 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 0.645 W/kg; SAR(10 g) = 0.265 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 44.8%

Maximum value of SAR (measured) = 1.08 W/kg

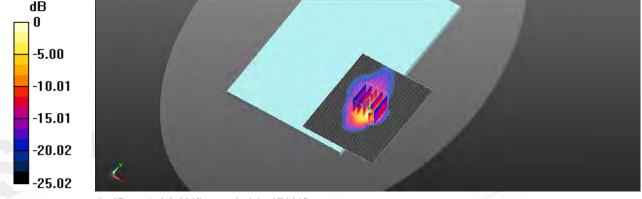

0 dB = 1.08 W/kg = 0.33 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 229 of 255

Date: 2022/8/11

ID: 028

Report No.: TESA2207000200ES

LTE Band 26 (15MHz)_Body_Back Surface_CH 26865_QPSK_1-0_0mm_Ant1

Communication System: LTE; Frequency: 831.5 MHz; Duty cycle= 1:1

Medium parameters used: f = 831.5 MHz; $\sigma = 0.897 \text{ S/m}$; $\varepsilon_r = 41.027$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.3°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(10.36, 10.36, 10.36); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x91x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 0.630 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.431 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 1.88 W/kg

SAR(1 g) = 0.663 W/kg; SAR(10 g) = 0.304 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 47.9%

Maximum value of SAR (measured) = 1.18 W/kg

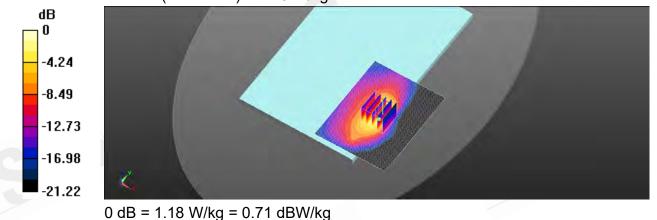

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 www.sas.com.tw

t (886-2) 2299-3279 f (886-2) 2298-0488



Page: 230 of 255

Date: 2022/8/12

ID: 029

Report No.: TESA2207000200ES

LTE Band 66 (20MHz)_Body_Back Surface_CH 132322_QPSK_1-0_0mm_Ant1

Communication System: LTE; Frequency: 1745 MHz; Duty cycle= 1:1

Medium parameters used: f = 1745 MHz; $\sigma = 1.372 \text{ S/m}$; $\varepsilon_r = 40.307$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.6°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(9.16, 9.16, 9.16); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x91x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 1.13 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.214 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 1.90 W/kg

SAR(1 g) = 0.834 W/kg; SAR(10 g) = 0.354 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 44.4%

Maximum value of SAR (measured) = 1.40 W/kg

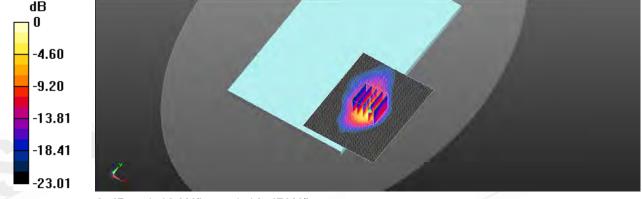

0 dB = 1.40 W/kg = 1.46 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 231 of 255

Date: 2022/8/16

ID: 030

Report No.: TESA2207000200ES

LTE Band 7 (20MHz)_Body_Back Surface_CH 20850_QPSK_1-0_0mm_Ant2

Communication System: LTE; Frequency: 2510 MHz; Duty cycle= 1:1

Medium parameters used: f = 2510 MHz; $\sigma = 1.88 \text{ S/m}$; $\epsilon_r = 39.593$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.7°C; Liquid temperature: 22.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(8.02, 8.02, 8.02); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x111x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.928 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.215 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 1.68 W/kg

SAR(1 g) = 0.549 W/kg; SAR(10 g) = 0.222 W/kg

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 38.2%

Maximum value of SAR (measured) = 0.945 W/kg

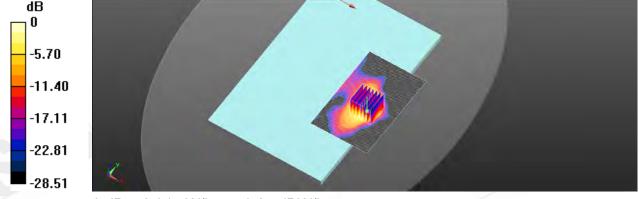

0 dB = 0.945 W/kg = -0.25 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 232 of 255

Date: 2022/8/16

ID: 031

Report No.: TESA2207000200ES

LTE Band 38 (20MHz)_Body_Back Surface_CH 38150_QPSK_1-0_0mm_Ant2

Communication System: LTE; Frequency: 2610 MHz; Duty cycle= 1:1.58

Medium parameters used: f = 2610 MHz; $\sigma = 1.989 \text{ S/m}$; $\varepsilon_r = 39.451$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.7°C; Liquid temperature: 22.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(8.02, 8.02, 8.02); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (91x121x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 1.02 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.563 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 1.71 W/kg

SAR(1 g) = 0.544 W/kg; SAR(10 g) = 0.213 W/kg

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 42.5%

Maximum value of SAR (measured) = 1.01 W/kg

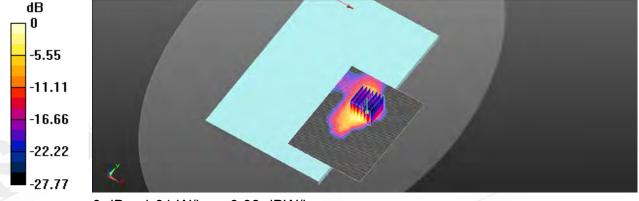

0 dB = 1.01 W/kg = 0.03 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279 f (886-2) 2298-0488

www.sas.com.tw



Page: 233 of 255

Date: 2022/8/16

ID: 032

Report No. :TESA2207000200ES

LTE Band 41 (20MHz)_Body_Back Surface_CH 39750_QPSK_1-0_0mm_Ant2

Communication System: LTE; Frequency: 2506 MHz; Duty cycle= 1:1.58

Medium parameters used: f = 2506 MHz; σ = 1.876 S/m; ε_r = 39.603; ρ = 1000 kg/m³

Phantom section: Flat Section

Ambient temperature: 22.7°C; Liquid temperature: 22.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(8.02, 8.02, 8.02); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (91x121x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 1.31 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.923 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 2.34 W/kg

SAR(1 g) = 0.776 W/kg; SAR(10 g) = 0.323 W/kg

Smallest distance from peaks to all points 3 dB below = 7 mm

Ratio of SAR at M2 to SAR at M1 = 44.9%

Maximum value of SAR (measured) = 1.38 W/kg

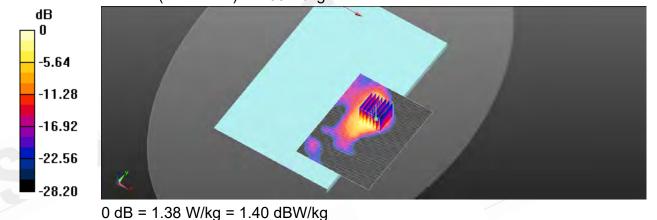

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 234 of 255

Date: 2022/8/14

ID: 033

Report No.: TESA2207000200ES

WLAN 802.11b_Body_Back Surface_CH 11_0mm_Ant4

Communication System: WLAN; Frequency: 2462 MHz; Duty cycle= 1:1.005

Medium parameters used: f = 2462 MHz; $\sigma = 1.828 \text{ S/m}$; $\varepsilon_r = 39.65$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.6°C; Liquid temperature: 22.6°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(8.32, 8.32, 8.32); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x91x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.779 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.234 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 1.37 W/kg

SAR(1 g) = 0.478 W/kg; SAR(10 g) = 0.192 W/kg

Smallest distance from peaks to all points 3 dB below = 7.8 mm

Ratio of SAR at M2 to SAR at M1 = 45%

Maximum value of SAR (measured) = 0.945 W/kg

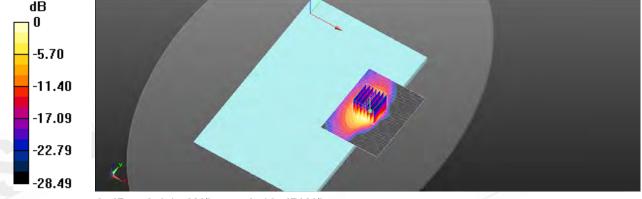

0 dB = 0.945 W/kg = -0.42 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 235 of 255

Date: 2022/8/14

ID: 034

Report No.: TESA2207000200ES

Bluetooth(GFSK)_Body_Back Surface_CH 78_14mm_Ant4

Communication System: Bluetooth; Frequency: 2480 MHz; Duty cycle= 1:1.307

Medium parameters used: f = 2480 MHz; $\sigma = 1.848 \text{ S/m}$; $\varepsilon_r = 39.642$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.6°C; Liquid temperature: 22.6°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(8.32, 8.32, 8.32); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x91x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.0343 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.667 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.0500 W/kg

SAR(1 g) = 0.023 W/kg; SAR(10 g) = 0.011 W/kg

Smallest distance from peaks to all points 3 dB below = 7.8 mm

Ratio of SAR at M2 to SAR at M1 = 46.5%

Maximum value of SAR (measured) = 0.0352 W/kg

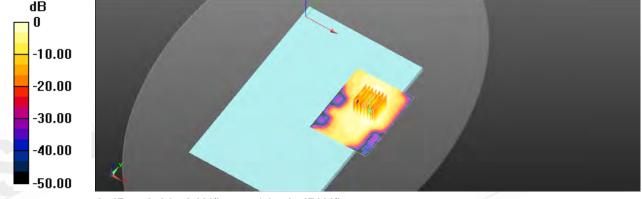

0 dB = 0.0352 W/kg = -14.53 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 236 of 255

Date: 2022/8/17

ID: 035

Report No.: TESA2207000200ES

WLAN 802.11a 5.2G_Body_Top Edge_CH 48_15mm_Ant4

Communication System: WLAN; Frequency: 5240 MHz; Duty cycle= 1:1.026

Medium parameters used: f = 5240 MHz; σ = 4.751 S/m; ε_r = 36.478; ρ = 1000 kg/m³

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.6°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(5.81, 5.81, 5.81); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (91x131x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.543 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.128 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 0.984 W/kg

SAR(1 g) = 0.295 W/kg; SAR(10 g) = 0.111 W/kg

Smallest distance from peaks to all points 3 dB below = 11.1 mm

Ratio of SAR at M2 to SAR at M1 = 57.4%

Maximum value of SAR (measured) = 0.528 W/kg

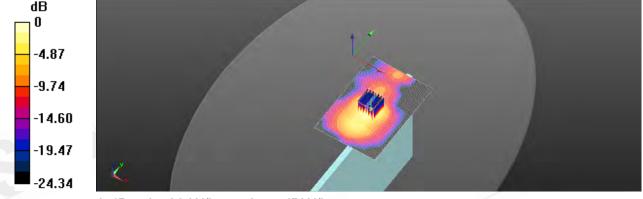

0 dB = 0.528 W/kg = -2.77 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 237 of 255

Date: 2022/8/17

ID: 036

Report No.: TESA2207000200ES

WLAN 802.11a 5.3G_Body_Top Edge_CH 60_15mm_Ant4

Communication System: WLAN; Frequency: 5300 MHz; Duty cycle= 1:1.026

Medium parameters used: f = 5300 MHz; σ = 4.814 S/m; ε_r = 36.406; ρ = 1000 kg/m³

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.6°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(5.81, 5.81, 5.81); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (91x131x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 0.551 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.810 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.295 W/kg; SAR(10 g) = 0.111 W/kg

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 55.9%

Maximum value of SAR (measured) = 0.542 W/kg

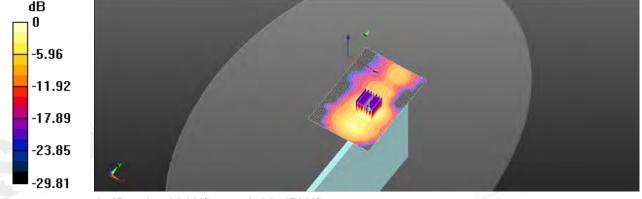

0 dB = 0.542 W/kg = -2.66 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 238 of 255

Date: 2022/8/18

ID: 037

Report No.: TESA2207000200ES

WLAN 802.11n(40M) 5.6G_Body_Top Edge_CH 134_15mm_Ant4

Communication System: WLAN; Frequency: 5670 MHz; Duty cycle= 1:1.041

Medium parameters used: f = 5670 MHz; $\sigma = 5.198 \text{ S/m}$; $\varepsilon_r = 35.93$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 22.9°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(5.16, 5.16, 5.16); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x131x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.14 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.075 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 2.17 W/kg

SAR(1 g) = 0.588 W/kg; SAR(10 g) = 0.212 W/kg

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 54.2%

Maximum value of SAR (measured) = 1.10 W/kg

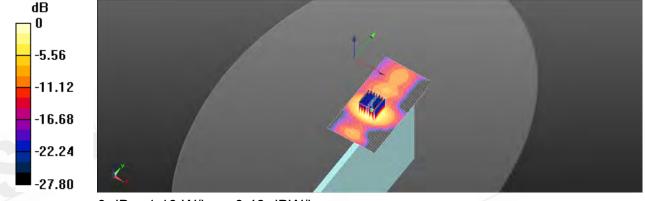

0 dB = 1.10 W/kg = 0.43 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 239 of 255

Date: 2022/8/19

ID: 038

Report No.: TESA2207000200ES

WLAN 802.11n(40M) 5.8G_Body_Top Edge_CH 151_15mm_Ant4

Communication System: WLAN; Frequency: 5755 MHz; Duty cycle= 1:1.041

Medium parameters used: f = 5755 MHz; σ = 5.285 S/m; ε_r = 35.843; ρ = 1000 kg/m³

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 22.4°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(5.3, 5.3, 5.3); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x131x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.10 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.566 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 2.13 W/kg

SAR(1 g) = 0.562 W/kg; SAR(10 g) = 0.204 W/kg

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 53.3%

Maximum value of SAR (measured) = 1.07 W/kg

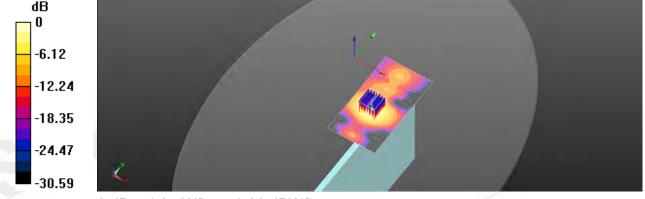

0 dB = 1.07 W/kg = 0.29 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 240 of 255

Date: 2022/8/14

ID: 039

Report No.: TESA2207000200ES

Bluetooth(GFSK)_Body_Back Surface_CH 39_0mm_Ant4

Communication System: Bluetooth; Frequency: 2441 MHz; Duty cycle= 1:1.307

Medium parameters used: f = 2441 MHz; $\sigma = 1.807$ S/m; $\varepsilon_r = 39.689$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.6°C; Liquid temperature: 22.6°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(8.32, 8.32, 8.32); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x91x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 0.210 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.352 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.316 W/kg

SAR(1 g) = 0.124 W/kg; SAR(10 g) = 0.059 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 35.3%

Maximum value of SAR (measured) = 0.226 W/kg

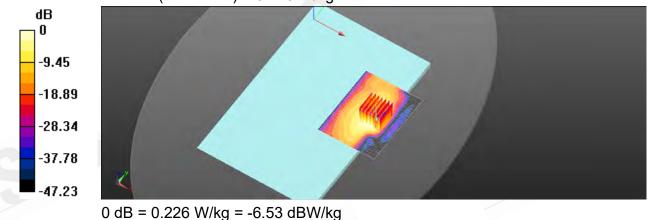

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 241 of 255

Date: 2022/8/17

ID: 040

Report No.: TESA2207000200ES

WLAN 802.11a 5.2G_Body_Top Edge_CH 36_0mm_Ant4

Communication System: WLAN; Frequency: 5180 MHz; Duty cycle= 1:1.026

Medium parameters used: f = 5180 MHz; σ = 4.692 S/m; ε_r = 36.531; ρ = 1000 kg/m³

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.6°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(5.81, 5.81, 5.81); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (101x131x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.86 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.254 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 3.46 W/kg

SAR(1 g) = 0.713 W/kg; SAR(10 g) = 0.163 W/kg

Smallest distance from peaks to all points 3 dB below = 4.7 mm

Ratio of SAR at M2 to SAR at M1 = 52%

Maximum value of SAR (measured) = 1.64 W/kg

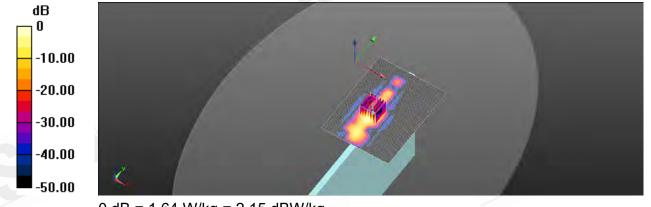

0 dB = 1.64 W/kg = 2.15 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sas.com.tw



Page: 242 of 255

Date: 2022/8/17

ID: 041

Report No.: TESA2207000200ES

WLAN 802.11a 5.3G_Body_Top Edge_CH 60_0mm_Ant4

Communication System: WLAN; Frequency: 5300 MHz; Duty cycle= 1:1.026

Medium parameters used: f = 5300 MHz; σ = 4.814 S/m; ε_r = 36.406; ρ = 1000 kg/m³

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.6°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(5.81, 5.81, 5.81); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x131x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 1.51 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.256 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 3.03 W/kg

SAR(1 g) = 0.612 W/kg; SAR(10 g) = 0.141 W/kg

Smallest distance from peaks to all points 3 dB below = 4.3 mm

Ratio of SAR at M2 to SAR at M1 = 52.1%

Maximum value of SAR (measured) = 1.43 W/kg

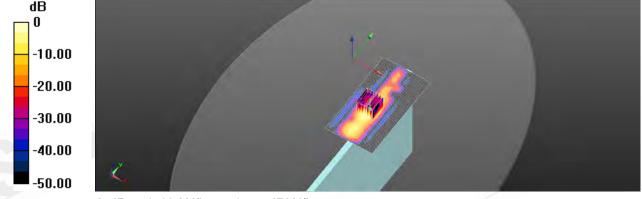

0 dB = 1.43 W/kg = 1.55 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 243 of 255

Date: 2022/8/18

ID: 042

Report No.: TESA2207000200ES

WLAN 802.11n(40M) 5.6G_Body_Top Edge_CH 134_0mm_Ant4

Communication System: WLAN; Frequency: 5670 MHz; Duty cycle= 1:1.041

Medium parameters used: f = 5670 MHz; $\sigma = 5.198 \text{ S/m}$; $\varepsilon_r = 35.93$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 22.9°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(5.16, 5.16, 5.16); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x131x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 2.03 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.254 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 3.53 W/kg

SAR(1 g) = 0.616 W/kg; SAR(10 g) = 0.133 W/kg

Smallest distance from peaks to all points 3 dB below = 4.7 mm

Ratio of SAR at M2 to SAR at M1 = 49.1%

Maximum value of SAR (measured) = 1.56 W/kg

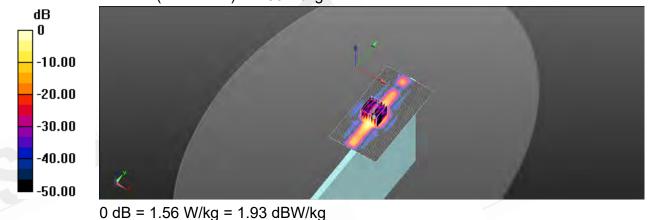

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 244 of 255

Date: 2022/8/19

ID: 043

Report No.: TESA2207000200ES

WLAN 802.11n(40M) 5.8G_Body_Top Edge_CH 159_0mm_Ant4

Communication System: WLAN; Frequency: 5795 MHz; Duty cycle= 1:1.041

Medium parameters used: f = 5795 MHz; σ = 5.322 S/m; ε_r = 35.796; ρ = 1000 kg/m³

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 22.4°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(5.3, 5.3, 5.3); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x131x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 2.31 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.254 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 4.61 W/kg

SAR(1 g) = 0.725 W/kg; SAR(10 g) = 0.156 W/kg

Smallest distance from peaks to all points 3 dB below = 4.3 mm

Ratio of SAR at M2 to SAR at M1 = 48.2%

Maximum value of SAR (measured) = 1.88 W/kg

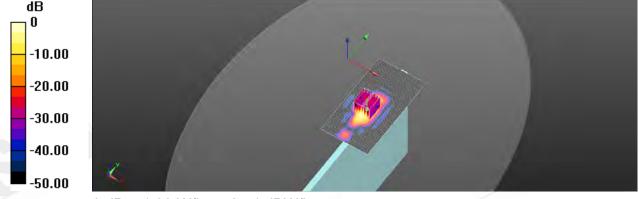

0 dB = 1.88 W/kg = 2.74 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 245 of 255

11 SAR SYSTEM CHECK RESULTS

Date: 2022/8/10

Report No.: TESA2207000200ES

Dipole 750 MHz_SN:1015

Communication System: CW; Frequency: 750 MHz; Duty cycle= 1:1

Medium parameters used: f = 750 MHz; $\sigma = 0.886 \text{ S/m}$; $\varepsilon_r = 41.38$; $\rho = 800 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.6°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(10.73, 10.73, 10.73); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection) Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (41x141x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 2.55 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 46.60 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 2.77 W/kg

SAR(1 g) = 1.94 W/kg; SAR(10 g) = 1.31 W/kg

Smallest distance from peaks to all points 3 dB below = 12 mm

Ratio of SAR at M2 to SAR at M1 = 71.6%

Maximum value of SAR (measured) = 2.43 W/kg

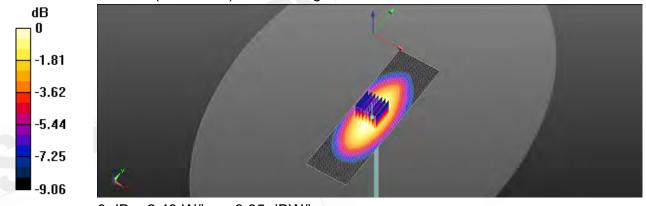

0 dB = 2.43 W/kg = 3.85 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 246 of 255

Date: 2022/8/11

Report No.: TESA2207000200ES Dipole 835 MHz SN:4d063

Communication System: CW; Frequency: 835 MHz; Duty cycle= 1:1

Medium parameters used: f = 835 MHz; $\sigma = 0.898 \text{ S/m}$; $\varepsilon_r = 41.022$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.3°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(10.36, 10.36, 10.36); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (51x121x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 2.88 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.11 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 3.45 W/kg

SAR(1 g) = 2.32 W/kg; SAR(10 g) = 1.53 W/kg

Smallest distance from peaks to all points 3 dB below = 18 mm

Ratio of SAR at M2 to SAR at M1 = 67.6%

Maximum value of SAR (measured) = 2.94 W/kg

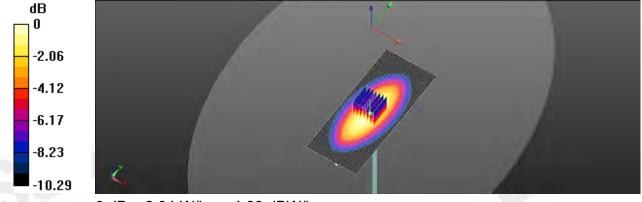

0 dB = 2.94 W/kg = 4.68 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 247 of 255

Date: 2022/8/12

Report No.: TESA2207000200ES Dipole 1750 MHz_SN:1008

Communication System: CW; Frequency: 1750 MHz; Duty cycle= 1:1

Medium parameters used: f = 1750 MHz; $\sigma = 1.375 \text{ S/m}$; $\varepsilon_r = 40.296$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.6°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(9.16, 9.16, 9.16); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (51x81x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 13.1 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 95.18 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 16.9 W/kg

SAR(1 g) = 9.14 W/kg; SAR(10 g) = 4.81 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 54.8%

Maximum value of SAR (measured) = 13.1 W/kg

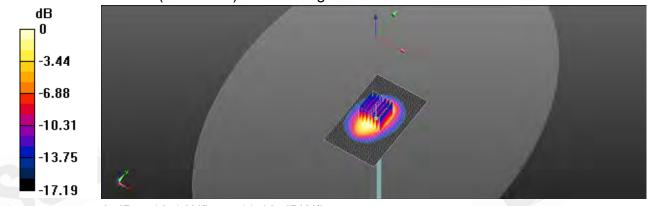

0 dB = 13.1 W/kg = 11.18 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 248 of 255

Date: 2022/8/13

Report No.: TESA2207000200ES **Dipole 1900 MHz_SN:5d173**

Communication System: CW; Frequency: 1900 MHz; Duty cycle= 1:1

Medium parameters used: f = 1900 MHz; $\sigma = 1.406 \text{ S/m}$; $\varepsilon_r = 40.212$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.8°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(8.83, 8.83, 8.83); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (51x91x1): Interpolated grid: dx=15 mm, dy=15 mm

Maximum value of SAR (interpolated) = 14.9 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 93.41 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 18.2 W/kg

SAR(1 g) = 9.98 W/kg; SAR(10 g) = 5.25 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 55.5%

Maximum value of SAR (measured) = 14.4 W/kg

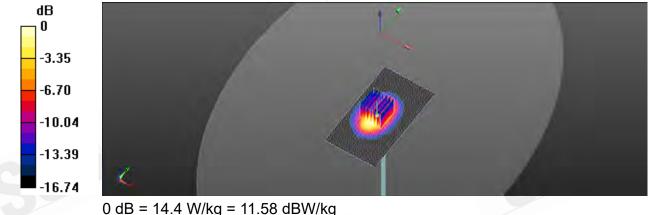

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司

No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279

f (886-2) 2298-0488

www.sas.com.tw



Page: 249 of 255

Date: 2022/8/14

Report No.: TESA2207000200ES

Dipole 2450 MHz SN:727

Communication System: CW; Frequency: 2450 MHz; Duty cycle= 1:1

Medium parameters used: f = 2450 MHz; $\sigma = 1.817 \text{ S/m}$; $\varepsilon_r = 39.686$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.6°C; Liquid temperature: 22.6°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(8.32, 8.32, 8.32); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (51x61x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 22.0 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 99.08 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 27.4 W/kg

SAR(1 g) = 13.3 W/kg; SAR(10 g) = 6.19 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 49.1%

Maximum value of SAR (measured) = 20.3 W/kg

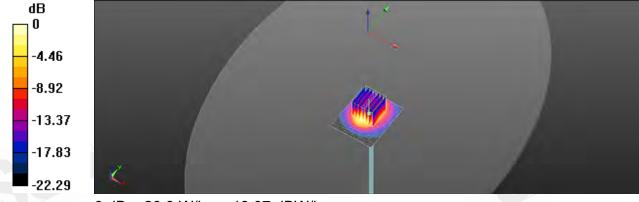

0 dB = 20.3 W/kg = 13.07 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 250 of 255

Date: 2022/8/15

Report No.: TESA2207000200ES **Dipole 2600 MHz_SN:1005**

Communication System: CW; Frequency: 2600 MHz; Duty cycle= 1:1

Medium parameters used: f = 2600 MHz; $\sigma = 1.978 \text{ S/m}$; $\varepsilon_r = 39.468$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.4°C; Liquid temperature: 22.5°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(8.02, 8.02, 8.02); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x91x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 22.7 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 104.7 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 28.9 W/kg

SAR(1 g) = 13.9 W/kg; SAR(10 g) = 6.3 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 49%

Maximum value of SAR (measured) = 21.5 W/kg

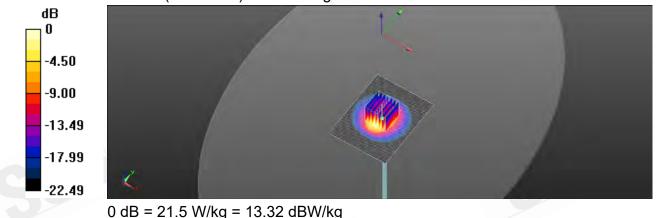

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 251 of 255

Date: 2022/8/16

Report No.: TESA2207000200ES **Dipole 2600 MHz_SN:1005**

Communication System: CW; Frequency: 2600 MHz; Duty cycle= 1:1

Medium parameters used: f = 2600 MHz; $\sigma = 1.977 \text{ S/m}$; $\varepsilon_r = 39.46$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.7°C; Liquid temperature: 22.2°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(8.02, 8.02, 8.02); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (71x91x1): Interpolated grid: dx=12 mm, dy=12 mm

Maximum value of SAR (interpolated) = 22.3 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 101.3 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 28.6 W/kg

SAR(1 g) = 13.9 W/kg; SAR(10 g) = 6.28 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 52.2%

Maximum value of SAR (measured) = 21.3 W/kg

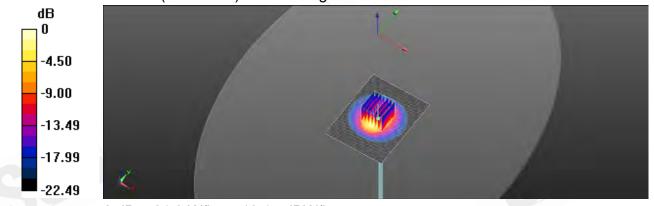

0 dB = 21.3 W/kg = 13.15 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 252 of 255

Date: 2022/8/17

Report No.: TESA2207000200ES Dipole 5250 MHz_SN:1023

Communication System: CW; Frequency: 5250 MHz; Duty cycle= 1:1

Medium parameters used: f = 5250 MHz; $\sigma = 4.76$ S/m; $\varepsilon_r = 36.453$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient temperature: 22.3°C; Liquid temperature: 22.6°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(5.81, 5.81, 5.81); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (51x51x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 19.2 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 65.43 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 34.1 W/kg

SAR(1 g) = 8.74 W/kg; SAR(10 g) = 2.5 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 56.8%

Maximum value of SAR (measured) = 18.2 W/kg

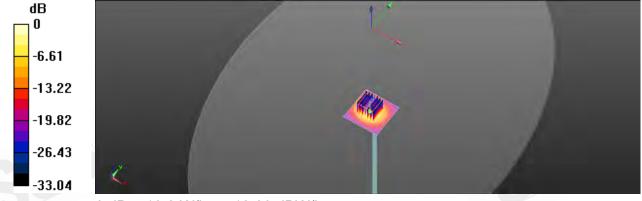

0 dB = 18.2 W/kg = 12.60 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 253 of 255

Date: 2022/8/18

Report No.: TESA2207000200ES **Dipole 5600 MHz_SN:1023**

Communication System: CW; Frequency: 5600 MHz; Duty cycle= 1:1

Medium parameters used: f = 5600 MHz; $\sigma = 5.124 \text{ S/m}$; $\varepsilon_r = 36.008$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.5°C; Liquid temperature: 22.9°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(5.16, 5.16, 5.16); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665; Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x91x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 18.9 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 62.70 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 36.4 W/kg

SAR(1 g) = 8.44 W/kg; SAR(10 g) = 2.36 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 53.4%

Maximum value of SAR (measured) = 18.0 W/kg

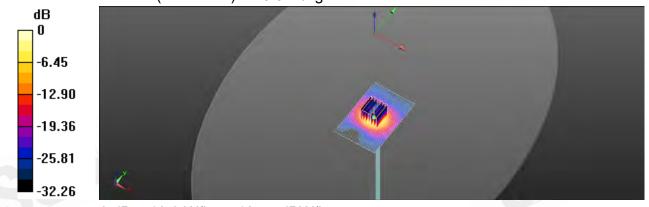

0 dB = 18.0 W/kg = 12.55 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 254 of 255

Date: 2022/8/19

Report No.: TESA2207000200ES **Dipole 5750 MHz SN:1023**

Communication System: CW; Frequency: 5750 MHz; Duty cycle= 1:1

Medium parameters used: f = 5750 MHz; $\sigma = 5.275 \text{ S/m}$; $\varepsilon_r = 35.854$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient temperature: 22.1°C; Liquid temperature: 22.4°C

DASY5 Configuration:

Probe: EX3DV4 - SN7686; ConvF(5.3, 5.3, 5.3); Calibrated: 2021/10/05

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1665: Calibrated: 2022/02/28

Phantom: ELI

DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Area Scan (61x91x1): Interpolated grid: dx=10 mm, dy=10 mm

Maximum value of SAR (interpolated) = 17.4 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 58.25 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 31.2 W/kg

SAR(1 g) = 8.09 W/kg; SAR(10 g) = 2.31 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 57.3%

Maximum value of SAR (measured) = 16.9 W/kg

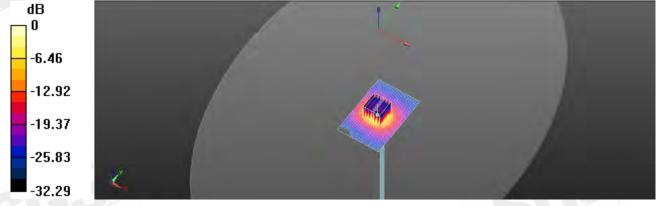

0 dB = 16.9 W/kg = 12.27 dBW/kg

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司



Page: 255 of 255

Refer to separated files for the following appendixes.

- 12.1 SAR_Appendix A Photographs
- 12.2 SAR_Appendix B DAE & Probe Cal. Certificate
- 12.3 SAR_Appendix C Phantom Description & Dipole Cal. Certificate
- 12.4 SAR_Appendix D Modulation system check

- End of report -

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司