



FCC Test Report

REPORT NO.: RF930407L06

MODEL NO.: GP00001-00C02

RECEIVED: 07 April, 2004

TESTED: 13 April, 2004 ~ 16 April, 2004

APPLICANT: Global Sun Technology Inc.

ADDRESS: No. 13, Tung Yuan Rd., Jung Li Industrial Park,
Jung Li City, Tao Yuan Hsien, Taiwan

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: 47 14th Lin, Chiapau Tsun, Linko, Taipei, Taiwan,
R.O.C.

This test report consists of 69 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by any government agencies. The test results in the report only apply to the tested sample.



TABLE OF CONTENTS

1.	CERTIFICATION	4
2.	SUMMARY OF TEST RESULTS	5
3.	GENERAL INFORMATION	6
3.1.	GENERAL DESCRIPTION OF EUT	6
3.2.	DESCRIPTION OF TEST MODES	7
3.3.	GENERAL DESCRIPTION OF APPLIED STANDARDS	7
3.4.	DESCRIPTION OF SUPPORT UNITS	8
3.5.	CONFIGURATION OF SYSTEM UNDER TEST	8
4.	TEST TYPES AND RESULTS	9
4.1.	MODULATION CHARACTERISTICS	9
4.1.1.	DESCRIPTION OF MODULATION TECHNIQUE	9
4.1.2.	THE ACTIVE TIME SLOT 8 MODULATED FRAME PLOT	10
4.2.	OUTPUT POWER MEASUREMENT	12
4.2.1.	LIMITS OF OUTPUT POWER MEASUREMENT	12
4.2.2.	TEST INSTRUMENTS	12
4.2.3.	TEST PROCEDURES	13
4.2.4.	TEST SETUP	14
4.2.5.	EUT OPERATING CONDITIONS	15
4.2.6.	TEST RESULTS	16
4.3.	FREQUENCY STABILITY MEASUREMENT	19
4.3.1.	LIMITS OF FREQUENCY STABILITY MEASUREMENT	19
4.3.2.	TEST INSTRUMENTS	19
4.3.3.	TEST PROCEDURE	20
4.3.4.	TEST SETUP	20
4.3.5.	TEST RESULTS	21
4.4.	OCCUPIED BANDWIDTH MEASUREMENT	23
4.4.1.	LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT	23
4.4.2.	TEST INSTRUMENTS	23
4.4.3.	TEST SETUP	23
4.4.4.	TEST PROCEDURES	24
4.4.5.	EUT OPERATING CONDITION	24
4.4.6.	TEST RESULTS	24
4.5.	BAND EDGE MEASUREMENT	31
4.5.1.	LIMITS OF BAND EDGE MEASUREMENT	31
4.5.2.	TEST INSTRUMENTS	31



4.5.3.	TEST SETUP.....	31
4.5.4.	TEST PROCEDURES	32
4.5.5.	EUT OPERATING CONDITION	32
4.5.6.	TEST RESULTS	33
4.6.	CONDUCTED SPURIOUS EMISSIONS	35
4.6.1.	LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT	35
4.6.2.	TEST INSTRUMENTS.....	35
4.6.3.	TEST PROCEDURE.....	36
4.6.4.	TEST SETUP.....	36
4.6.5.	EUT OPERATING CONDITIONS	37
4.6.6.	TEST RESULTS	38
4.7.	RADIATED EMISSION MEASUREMENT	50
4.7.1.	LIMITS OF RADIATED EMISSION MEASUREMENT	50
4.7.2.	TEST INSTRUMENTS.....	51
4.7.3.	TEST PROCEDURES	52
4.7.4.	DEVIATION FROM TEST STANDARD	52
4.7.5.	TEST SETUP.....	53
4.7.6.	EUT OPERATING CONDITIONS	53
4.7.7.	TEST RESULTS	54
4.8.	EFFECTIVE RADIATED POWER MEASUREMENT	57
4.8.1.	LIMITS OF RADIATED EMISSION MEASUREMENT	57
4.8.2.	TEST INSTRUMENTS.....	58
4.8.3.	TEST PROCEDURES	59
4.8.4.	DEVIATION FROM TEST STANDARD	59
4.8.5.	TEST SETUP.....	60
4.8.6.	EUT OPERATING CONDITIONS	60
4.8.7.	TEST RESULTS	61
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	67
6.	INFORMATION ON THE TESTING LABORATORIES	69



1. CERTIFICATION

PRODUCT : GPRS PC Card
BRAND NAME : Global Sun
MODEL NO. : GP00001-00C02
TEST ITEM: ENGINEERING SAMPLE
APPLICANT : Global Sun Technology Inc.
TEST STANDARDS : FCC Part 24, Subpart E, ANSI C63.4-2001

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from 13 April, 2004 ~ 16 April, 2004. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

PREPARED BY: Stacy Hsieh, **DATE:** 23 April, 2004
Stacy Hsieh

APPROVED BY: Cody Chang, **DATE:** 23 April, 2004
Cody Chang / Supervisor



2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC 47 CFR Part 24 & Part 2 / IC RSS-133			
Standard Section	Test Type and Limit	Result	REMARK
2.1047(d)	Modulation Characteristics	PASS	NA
2.1046, 24.232	Maximum Peak Output Power Limit: max. 2 watts e.i.r.p peak power	PASS	Meet the requirement of limit Minimum passing margin is -28.60dBm at 1850.20MHz.
2.1055, 24.235	Frequency Stability AFC Freq. Error vs. Voltage AFC Freq. Error vs. Temperature Limit: max. ± 0.1 ppm	PASS	Meet the requirement of limit.
2.1049, 24.238(b)	Occupied Bandwidth	PASS	Meet the requirement of limit.
24.238(b)	Band Edge Measurements	PASS	NA
2.1051, 24.238	Conducted Spurious Emissions	PASS	Meet the requirement of limit Minimum passing margin is -24.51dB at 5646.00MHz.
2.1053, 24.238	Radiated Spurious Emissions	PASS	Meet the requirement of limit Minimum passing margin is -2.29dB at 331.30MHz.



3. GENERAL INFORMATION

3.1. GENERAL DESCRIPTION OF EUT

PRODUCT	GPRS PC Card
MODEL NO.	GP00001-00C02
POWER SUPPLY	3.3Vdc from host equipment
MODULATION TYPE	GMSK
FREQUENCY RANGE	Tx Frequency : 1850.2MHz~1909.8MHz (PCS band) Rx Frequency : 1930.2MHz~1989.8MHz (PCS band)
NUMBER OF CHANNEL	299
MAX. CONDUCTED PEAK OUTPUT POWER	28.60dBm (0.724Watts)
MAX. RADITED EIRP PEAK OUTPUT POWER	29.70dBm (0.933Watts)
ANTENNA TYPE	Dipole antenna
DATA CABLE	NA
I/O PORTS	Earphone port
ASSOCIATED DEVICES	Earphone

NOTE:

1. The EUT is single band GPRS PC Card. The protocol of this system is the PCS1900.
2. There are three types of antennas provided to this EUT:

Antenna	Antenna Type	Antenna Gain (dBi)
1	Dipole antenna	1.00 dBi
2	Dipole antenna	0.05 dBi
3	Dipole antenna	-1.99 dBi

3. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



3.2. DESCRIPTION OF TEST MODES

299 channels are provided to this EUT in the PCS1900 band. Therefore choice the low, middle and high channels to testing.

Channel	Frequency	Channel	Frequency
512(low cha.)	1850.2MHz	661(middle cha.)	1880.0 MHz
810(high cha.)	1909.8 MHz	NA	

NOTE:

1. Below 1 GHz, the channel 512, 661, and 810 were pre-tested in chamber. The channel 512, worst case one was chosen for final test.
2. Above 1 GHz, the channel 512, 661, and 810 were tested individually.
3. When the Power Control Level set 0, the worst case, was chosen for final test.
4. The channel space is 0.2MHz.
5. There are three sets of dipole antenna. After pre-tested, we reported two test mode. Mode A is for dipole antenna with largest antenna gain, and mode B is dipole antenna with smallest antenna gain.

3.3. GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a GPRS PC Card. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 24

IC RSS-133

ANSI C63.4: 2001

ANSI / TIA / EIA-603-A-2001

All test items have been performed and recorded as per the above standards.



3.4. DESCRIPTION OF SUPPORT UNITS



The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	DELL	PP05L	25191592336	E2K24CLNS
2	MODEM	ACEEX	1414V/3	0401008248	IFAXDM1414
3.	PRINTER	EPSON	LQ-300+	DCGY048265	FCC DoC Approved
4	UNIVERSAL RADIO COMMUNICATION TESTER	R&S	CMU200	101372	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.2m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core
3	NA
4	NA

NOTE: All power cords of the above support units are non shielded (1.8m).

3.5. CONFIGURATION OF SYSTEM UNDER TEST

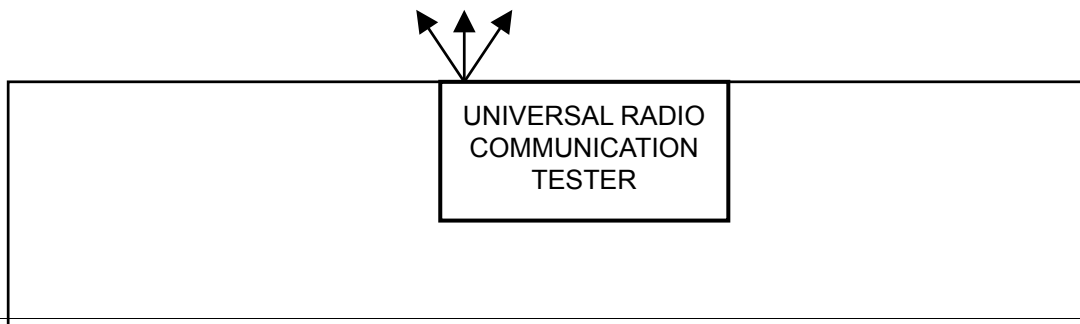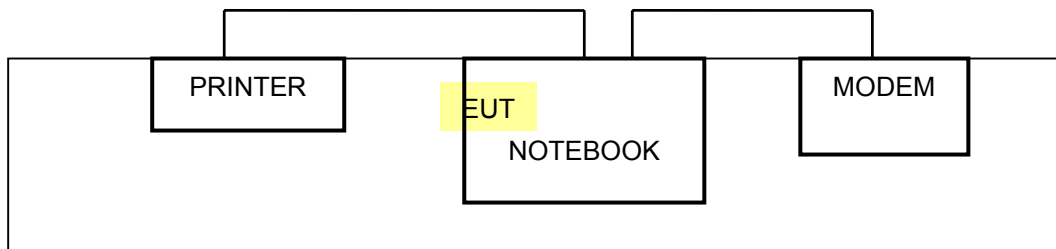



4. TEST TYPES AND RESULTS

4.1. MODULATION CHARACTERISTICS

4.1.1. DESCRIPTION OF MODULATION TECHNIQUE


According to FCC 2.1047(d), the system is used the digital modulation and accomplished with the PCS requirement as defined in the 3GGP TS 05:01, TS 05:02, TS 05:04. It uses narrowband TDMA. Eight simultaneous calls can occupy the same radio frequency.

There are 299 channels and channel space is 200kHz. The frequency band 1850~1910MHz is allocated to the uplink and 1930~1990MHz to the downlink. The uplink and downlink channel space is 80MHz and is duplex at the same time.


The modulation scheme used the GMSK (Gaussian Minimum Shift Keying) that is the special case of FSK (frequency Shift Keying). The each time slot is last about 580 μ s and data length is 156.25bits. A frame contains the eight time slots.



4.1.2. THE ACTIVE TIME SLOT 8 MODULATED FRAME PLOT

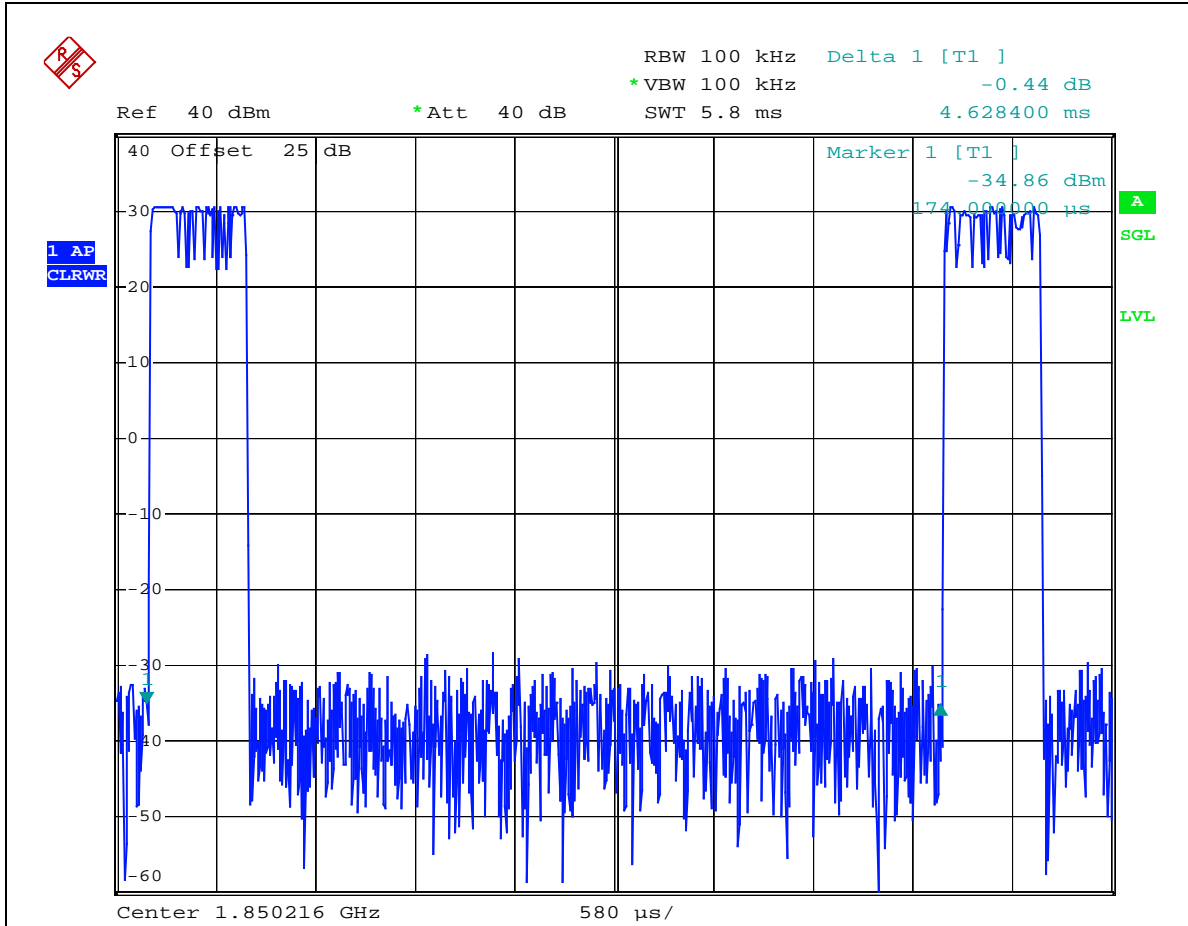

Date: 15.APR.2004 21:23:29

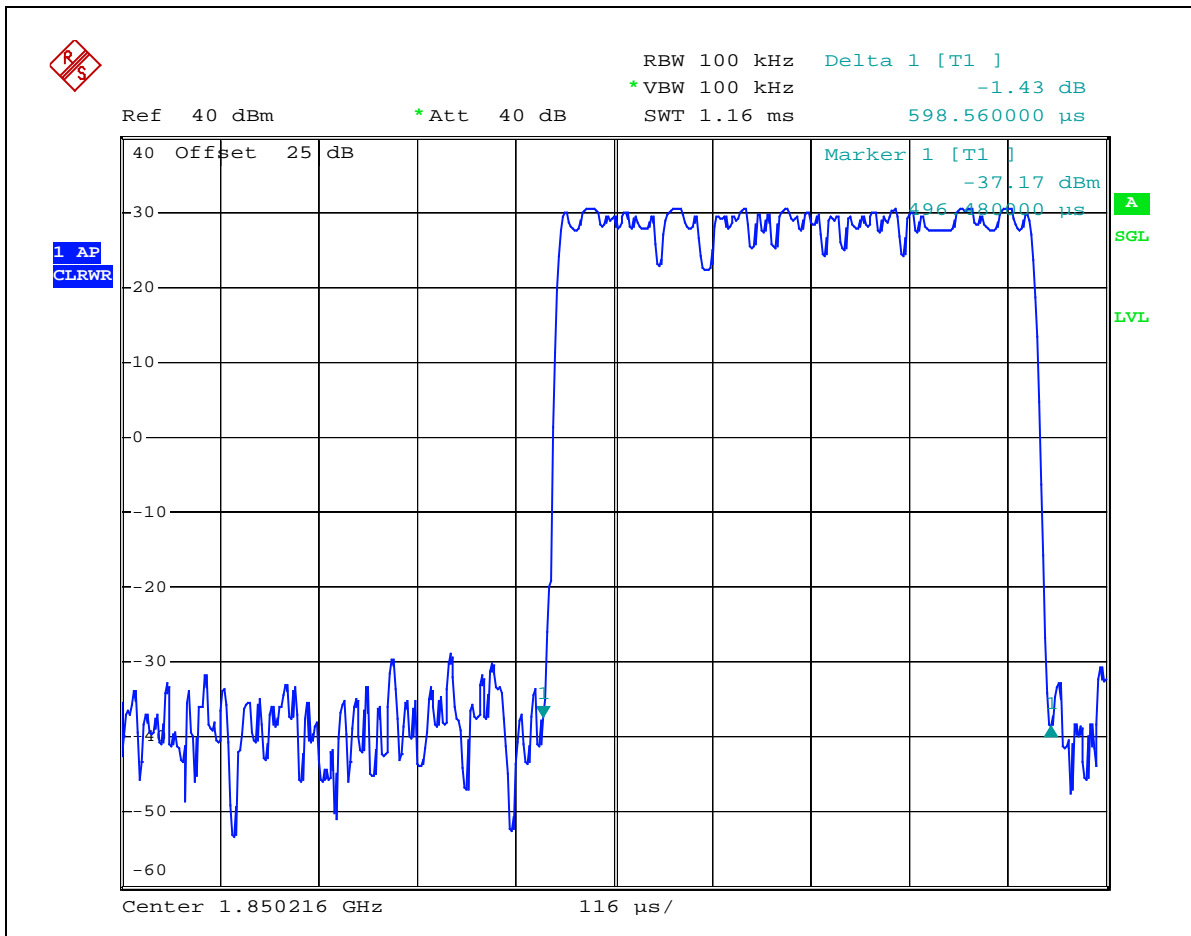

Date: 15.APR.2004 21:24:29



4.2. OUTPUT POWER MEASUREMENT

4.2.1. LIMITS OF OUTPUT POWER MEASUREMENT

The radiated peak output power shall be according to the specific rule Part 24.232(b) that “Mobile / Portable station are limited to 2 watts e.i.r.p” and 24.232(c) specific that “Peak transmit power must be measure over any interval of continuous transmission using instrumentation calibration in terms of rms-equivalent voltage.”

4.2.2. TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
* ROHDE & SCHWARZ Spectrum Analyzer	FSP40	100035	Apr. 15, 2005
* ROHDE & SCHWARZ Signal Generator	SMP04	10001	May 05, 2004
* ROHDE & SCHWARZ Universal Radio Communication Tester	CMU200	836072/086	Apr. 21, 2005
* EMCO Horn Antenna	3115	9811-5623	Jul. 27, 2004
* EMCO Horn Antenna	3115	9811-5619	Jul. 15, 2004
* EMCO Turn Table & Tower Controller	2090	NA	NA
* Software	ADT_Radiated_V 5.14	NA	NA
* Mini-Circuits Power Splitter	ZAPD-4	400005	NA
* Hewlett Packard RF cable	8120-6192	01428251	NA
* JFW 20dB attenuation	50HF-020-SMA	NA	NA
* Suhner RF cable	Sucoflex104	204850/4	NA

- NOTE:** 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
2. “*” = These equipments are used for the final measurement.
3. The test was performed in ADT RF fully anechoic chamber No. 2.




4.2.3. TEST PROCEDURES

- a. The EUT was set up for the maximum peak power with GPRS link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels, 512, 661 and 810(low, middle and high operational frequency range.)
- b. The conducted peak output power used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. The path loss included the splitter loss, cable loss and 20dB pad loss. The spectrum set RB/VB 3MHz, then read peak power value and record to the test. (All transmitted path loss shall be considered in the test report data.)
- c. E.I.R.P peak power measurement. In the fully anechoic chamber, EUT placed on the 1.5m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- d. The substitution horn antenna is substituted for EUT at the same position and signal generator export the CW signal to the calibration antenna. Rotated the Turn Table to find the maximum radiation power. "Raw" is the spectrum reading value, "SG" is signal generator export power, "TX Gain" is calibration antenna isotropic gain value, "TX cable" is the transmitted cable loss between the calibration antenna and signal generator. The "Factor" means that the transmission path loss is equal to "SG" - "TX cable" + "TX Gain" - "Raw".
- e. Actually the real E.I.R.P peak power is equal to "Read Value" + "Factor"
- f. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.P.R \text{ power} - 2.15 \text{dBi}$.

NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak detection (PK)


4.2.4. TEST SETUP

EIRP Power Measurement

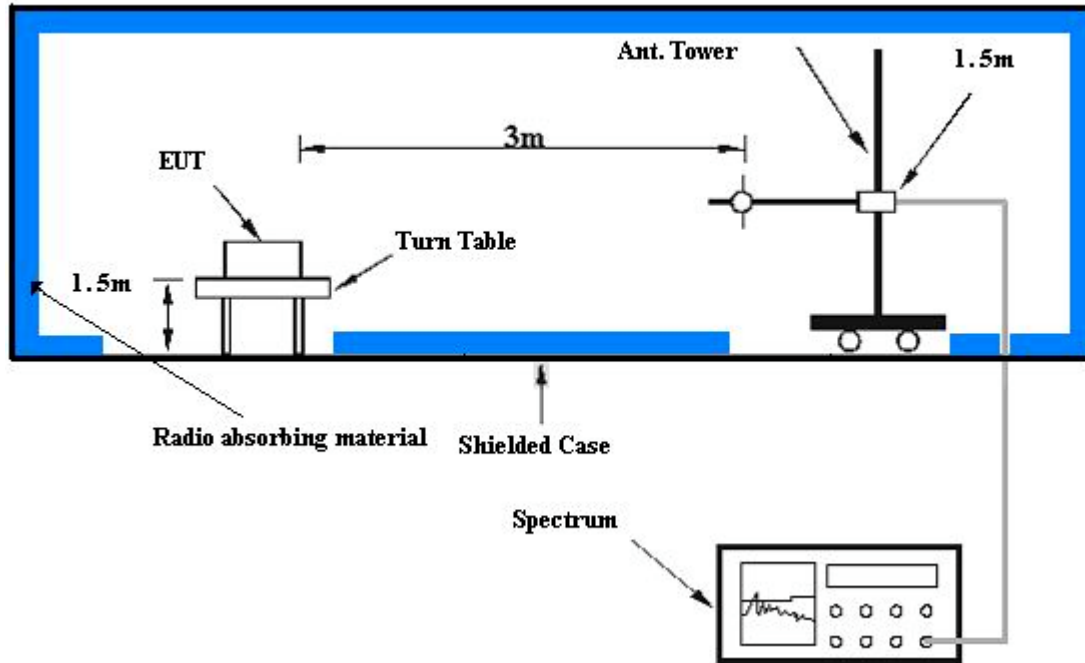

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

Conducted Power Measurement

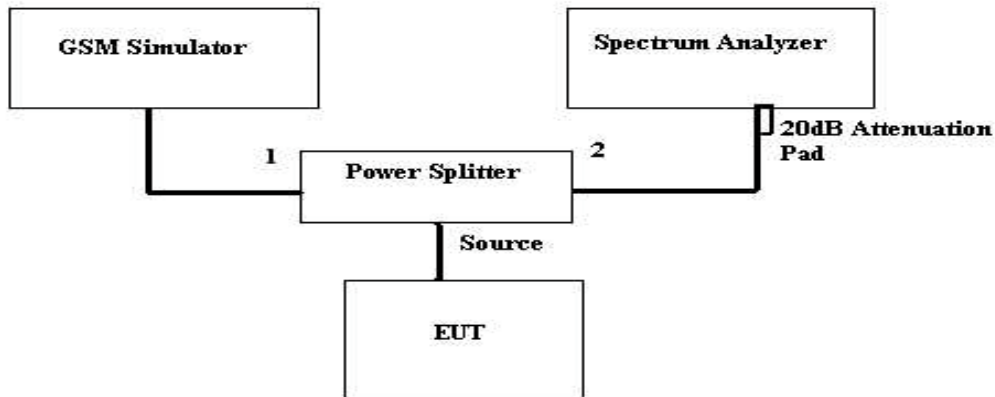

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.5. EUT OPERATING CONDITIONS

- a. Plug the EUT in a notebook system placed on a testing table.
- b. The notebook system makes a phone call to the GSM simulator.
- c. The GSM simulator station system controlled an EUT to export maximum output power under transmission mode and specific channel frequency.
- d. The notebook system sent "H" messages to its screen.
- e. The notebook system sent "H" messages to modem.
- f. The notebook system sent "H" messages to printer, and the printer prints them on paper.
- g. Repeated d ~ f.



4.2.6. TEST RESULTS

EUT	GPRS PC Card	MODEL	GP00001-00C02
MODE	TX connected	POWER CONTROL LEVEL	0
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak
ENVIRONMENTAL CONDITIONS	21 deg. C, 65 % RH, 999 hPa	TESTED BY: Gary Chang	

CONDUCTED PEAK OUTPUT POWER					
Channel No.	Frequency (MHz)	Raw Value (dBm)	Correction Factor (dB)	Peak Output Power	
				dBm	Watt
512	1850.2	25.20	3.40	28.60	0.72
661	1880.0	25.00	3.40	28.40	0.69
810	1909.8	25.14	3.36	28.50	0.71

NOTE: 1. Peak Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).
 2. Correction Factor (dB) = Power Splitter Loss (dB) + Cable Loss (dB).



EUT	GPRS PC Card	MODEL	GP00001-00C02
MODE	TX (Mode A)	POWER CONTROL LEVEL	0
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak
ENVIRONMENTAL CONDITIONS	21 deg. C, 65 % RH, 999 hPa	TESTED BY: Gary Chang	

PEAK POWER (EIRP)					
Channel No.	Frequency (MHz)	Raw Value (dBm)	Correction Factor (dB)	Peak Output Power	
				dBm	Watt
512	1850.2	21.70	8.00	29.70	0.93
661	1880.0	21.60	8.00	29.60	0.91
810	1909.8	21.70	8.00	29.70	0.93

NOTE: 1. Peak Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).
 2. Correction Factor (dB) = Receiver Antenna Gain (dBi) + Cable lose (dB) + Free Space Loss (dB).



EUT	GPRS PC Card	MODEL	GP00001-00C02
MODE	TX (Mode B)	POWER CONTROL LEVEL	0
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak
ENVIRONMENTAL CONDITIONS	21 deg. C, 65 % RH, 999 hPa	TESTED BY: Gary Chang	

PEAK POWER (EIRP)					
Channel No.	Frequency (MHz)	Raw Value (dBm)	Correction Factor (dB)	Peak Output Power	
				dBm	Watt
512	1850.2	19.40	8.00	27.40	0.55
661	1880.0	19.60	8.00	27.60	0.58
810	1909.8	19.70	8.00	27.60	0.58

- NOTE:** 1. Peak Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).
 2. Correction Factor (dB) = Receiver Antenna Gain (dBi) + Cable lose (dB) + Free Space Loss (dB).



4.3. FREQUENCY STABILITY MEASUREMENT

4.3.1. LIMITS OF FREQUENCY STABILITY MEASUREMENT

According to the FCC part 2.4235 shall be tested the frequency stability. The rule is defined that” The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.” The frequency error rate is according to the JTC standard that the frequency error rate shall be accurate to within 0.1 ppm of the received frequency from the base station. The test extreme voltage is according to the 2.1055(d)(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment and the extreme temperature rule is comply with the 2.1055(a)(1) $-30^{\circ}\text{C} \sim 50^{\circ}\text{C}$.

4.3.2. TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
*ROHDE & SCHWARZ Universal Radio Communication Tester	CMU200	836072/086	Apr. 21, 2005
* Hewlett Packard RF cable	8120-6192	01428251	NA
* Suhner RF cable	Sucoflex104	204850/4	NA
*WIT Standard Temperature & Humidity Chamber	TH-4S-C	W981030	Jul. 12, 2004

- NOTE:**
1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
 2. “*” = These equipments are used for the final measurement.
 3. The test was performed in ADT RF OVEN room.




4.3.3. TEST PROCEDURE

- a. Because of the measure the carrier frequency under the condition of the AFC lock, it shall be used the mobile station in the GRRP link mode. This is accomplished with the use of the R&S CMU200 simulator station. The oven room could control the temperatures and humidity. The GPRS link channel is the 661.
- b. Power must be removed when changing from one temperature to another or one voltage to another voltage. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- c. EUT is connected the external power supply to control the DC input power. The various Volts from the minimum 3.3 Volts to 4.2 Volts. Each step shall be record the frequency error rate.
- d. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing.
- e. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the GSM simulator.

4.3.4. TEST SETUP

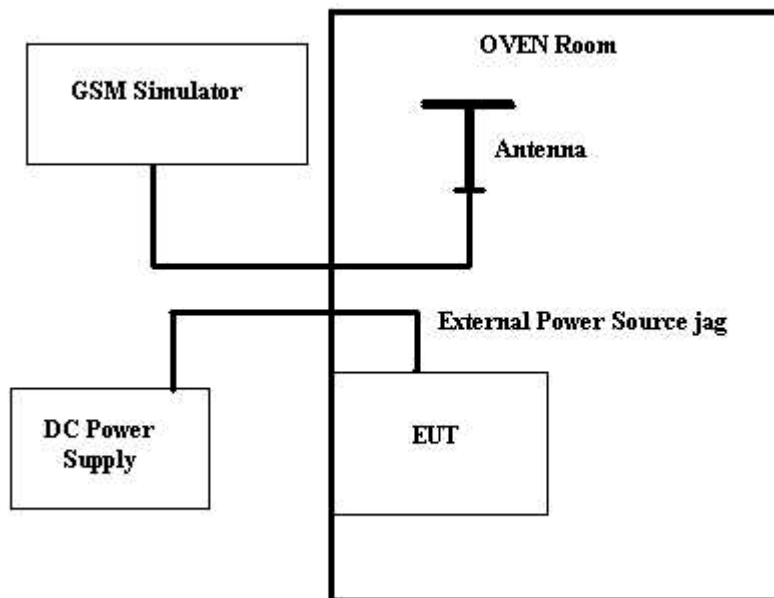



4.3.5. TEST RESULTS

EUT	GPRS PC Card	MODEL	GP00001-00C02
MODE	TX connected	POWER CONTROL LEVEL	0
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	500 Bursts
ENVIRONMENTAL CONDITIONS	21 deg. C, 65 % RH, 999 hPa	TESTED BY: Gary Chang	

AFC FREQUENCY ERROR vs. VOLTAGE AND TEMPERATURE				
Temp. (°C)	Voltage (Volts)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
50	138	32	0.0170	0.1
	120	33	0.0176	0.1
	102	34	0.0181	0.1
40	138	26	0.0138	0.1
	120	25	0.0133	0.1
	102	24	0.0128	0.1
30	138	27	0.0144	0.1
	120	26	0.0138	0.1
	102	26	0.0138	0.1
20	138	29	0.0154	0.1
	120	30	0.0160	0.1
	102	31	0.0165	0.1
10	138	31	0.0165	0.1
	120	31	0.0165	0.1
	102	32	0.0170	0.1



EUT	GPRS PC Card	MODEL	GP00001-00C02
MODE	TX connected	POWER CONTROL LEVEL	0
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	500 Bursts
ENVIRONMENTAL CONDITIONS	21 deg. C, 65 % RH, 999 hPa	TESTED BY: Gary Chang	

AFC FREQUENCY ERROR vs. VOLTAGE AND TEMPERATURE				
Temp. (°C)	Voltage (Volts)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
0	138	30	0.0160	0.1
	120	31	0.0165	0.1
	102	32	0.0170	0.1
-10	138	34	0.0180	0.1
	120	34	0.0180	0.1
	102	33	0.0176	0.1
-20	138	34	0.0180	0.1
	120	35	0.0186	0.1
	102	33	0.0176	0.1
-30	138	33	0.0176	0.1
	120	34	0.0180	0.1
	102	34	0.0180	0.1



4.4. OCCUPIED BANDWIDTH MEASUREMENT

4.4.1. LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT

According to FCC 24.238(b) specified that emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

4.4.2. TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
* ROHDE & SCHWARZ Spectrum Analyzer	FSP40	100035	Apr. 15, 2005
* ROHDE & SCHWARZ Universal Radio Communication Tester	CMU200	836072/086	Apr. 21, 2005
* Mini-Circuits Power Splitter	ZAPD-4	400005	NA
* Hewlett Packard RF cable	8120-6192	01428251	NA
* JFW 20dB attenuation	50HF-020-SMA	NA	NA
* Suhner RF cable	Sucoflex104	204850/4	NA

- NOTE:** 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
2. "*" = These equipments are used for the final measurement.

4.4.3. TEST SETUP

Same as Item 4.2.4 (Conducted Power Setup)



4.4.4. TEST PROCEDURES

- a. The EUT was set up for the maximum peak power with GPRS link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels, 512, 661 and 810(low, middle and high operational frequency range.)
- b. The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. This splitter loss and cable loss are the worst loss 4dB in the transmitted path track.
- c. FCC 24.238(b) required a measurement bandwidth is the fundamental emission below 26dB bandwidth.

4.4.5. EUT OPERATING CONDITION


- a. Plug the EUT in a notebook system placed on a testing table.
- b. The notebook system makes a phone call to the GSM simulator.
- c. The GSM simulator station system controlled an EUT to export maximum output power under transmission mode and specific channel frequency.
- d. The notebook system sent "H" messages to its screen.
- e. The notebook system sent "H" messages to modem.
- f. The notebook system sent "H" messages to printer, and the printer prints them on paper.
- g. Repeated d ~ f.

4.4.6. TEST RESULTS

Frequency (MHz)	Max. Output Power -26 dBc Bandwidth (kHz)	Min. Output Power -26 dBc Bandwidth (kHz)
1850.2	294	300
1880.0	308	306
1909.8	298	300




-26 dBc Bandwidth (Channel 512 Max. Power)

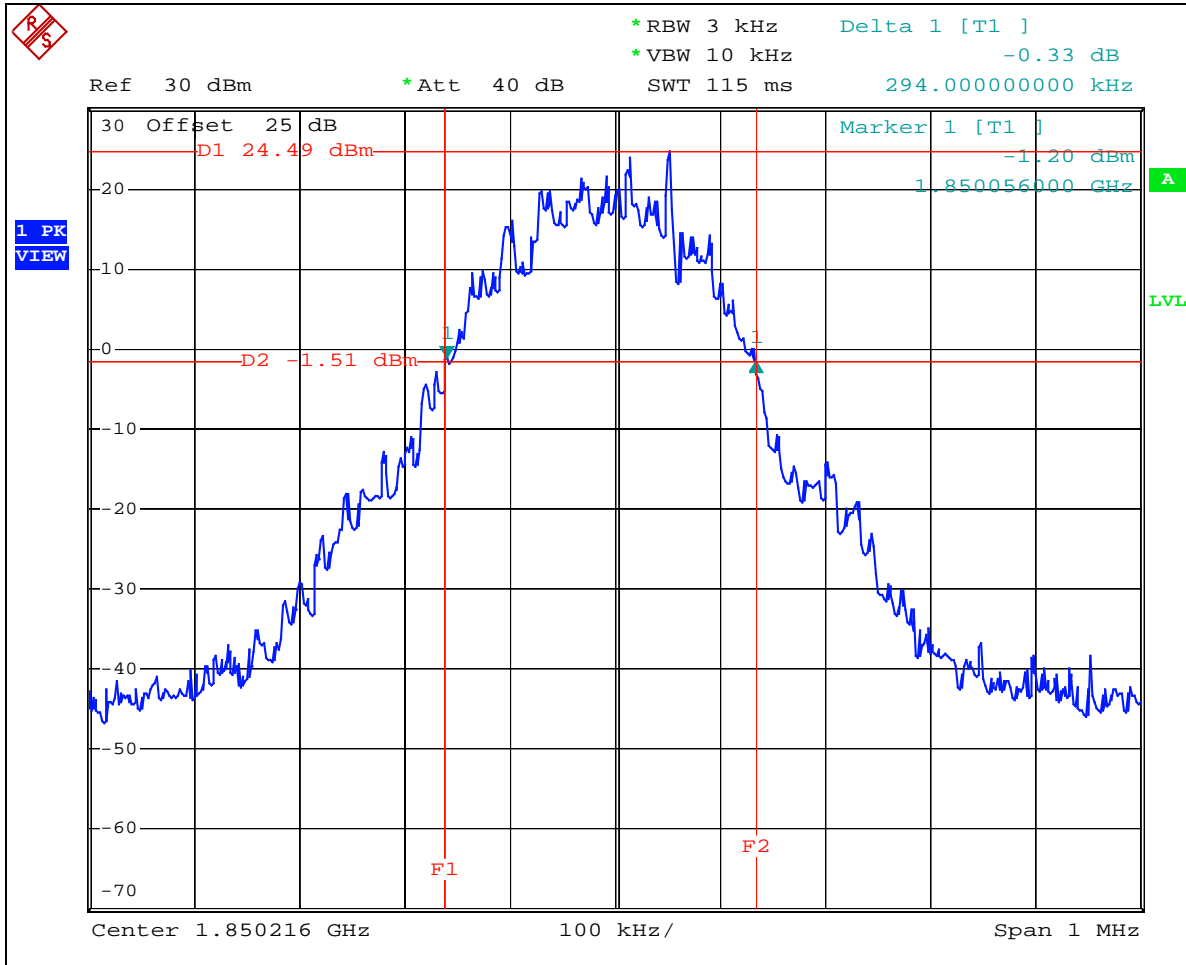

Date: 15.APR.2004 21:18:03




-26 dBc Bandwidth (Channel 512 Min. Power)

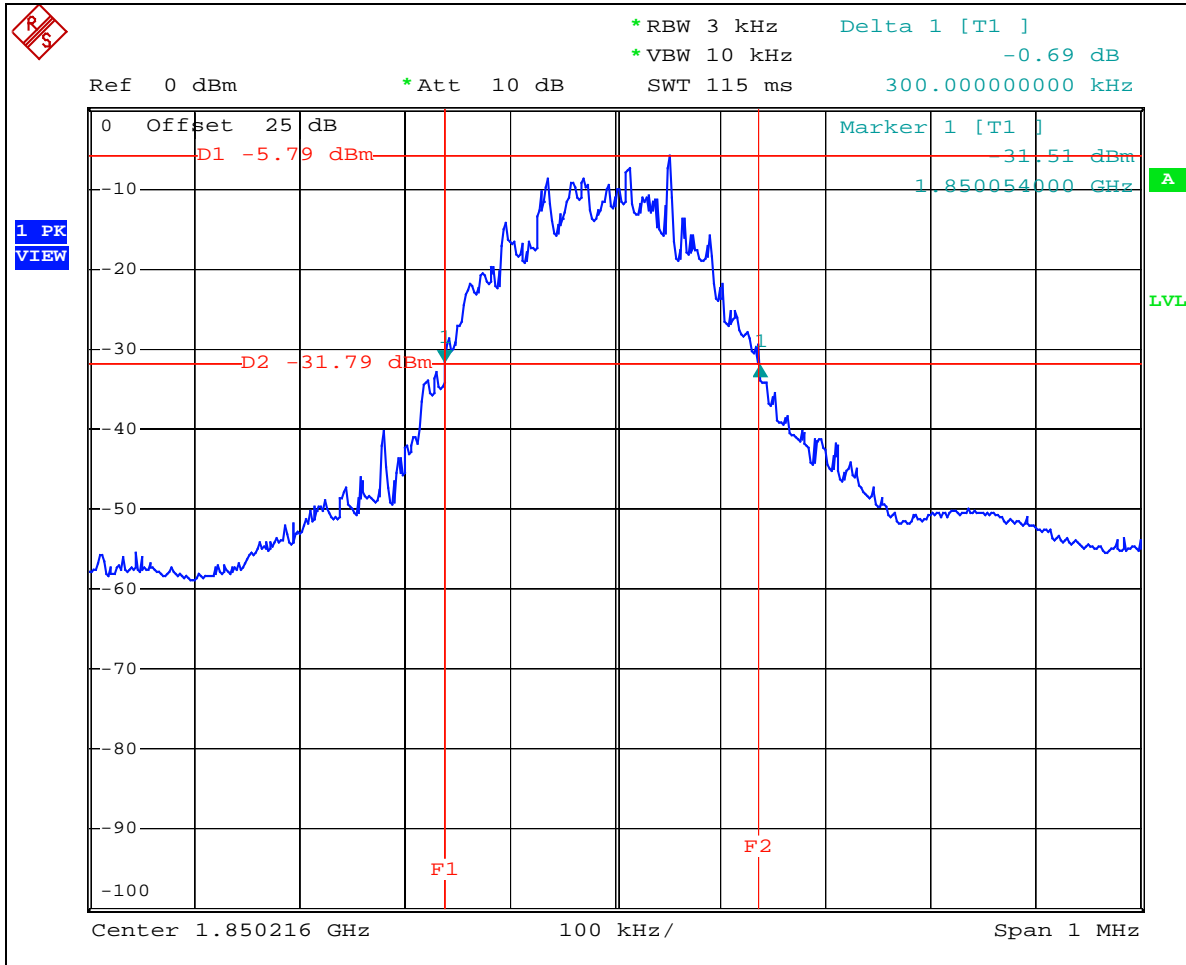

Date: 15.APR.2004 21:17:12




-26 dBc Bandwidth (Channel 661 Max. Power)

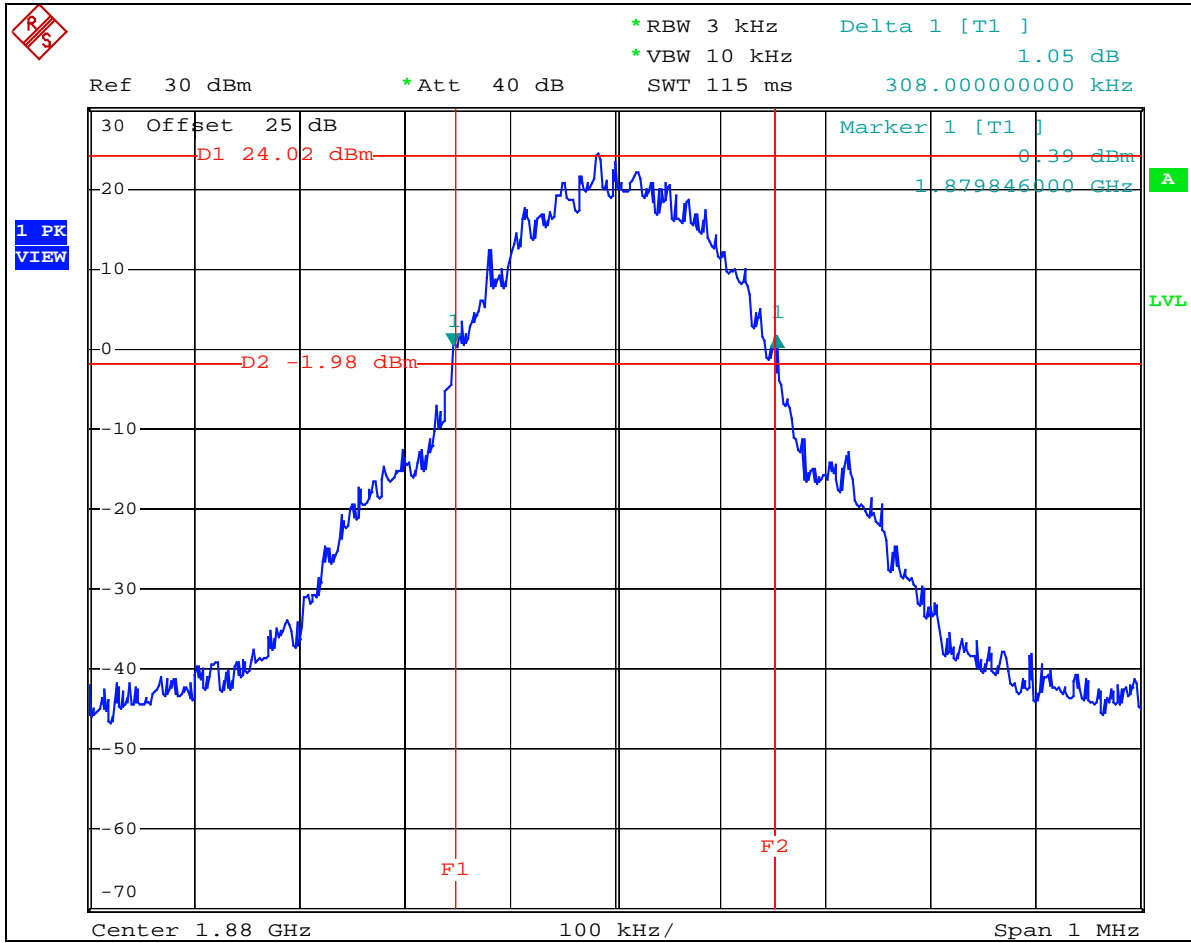

Date: 15.APR.2004 21:13:42




-26 dBc Bandwidth (Channel 661 Min. Power)

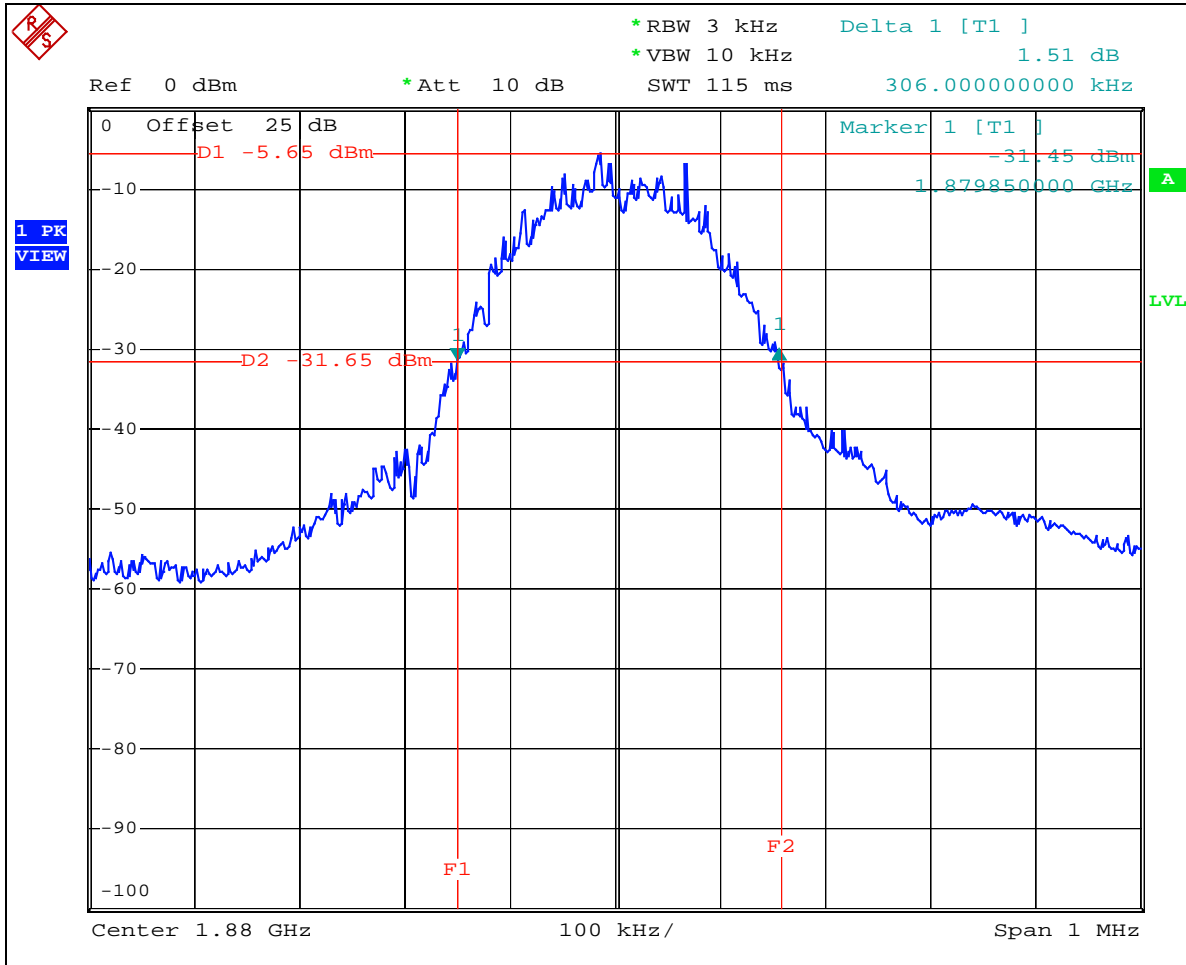

Date: 15.APR.2004 21:09:25




-26 dBc Bandwidth (Channel 810 Max. Power)

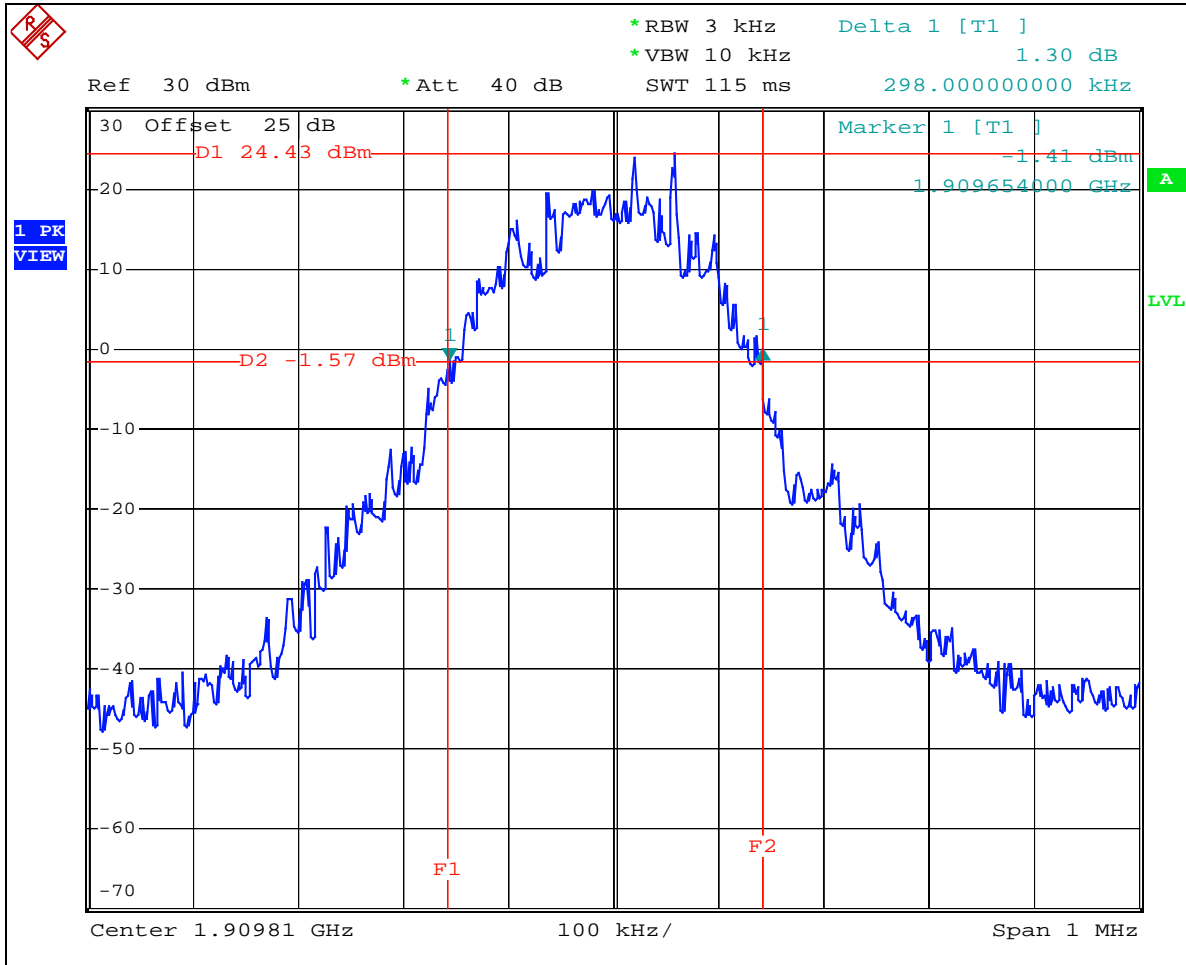

Date: 15.APR.2004 21:14:32



-26 dBc Bandwidth (Channel 810 Min. Power)

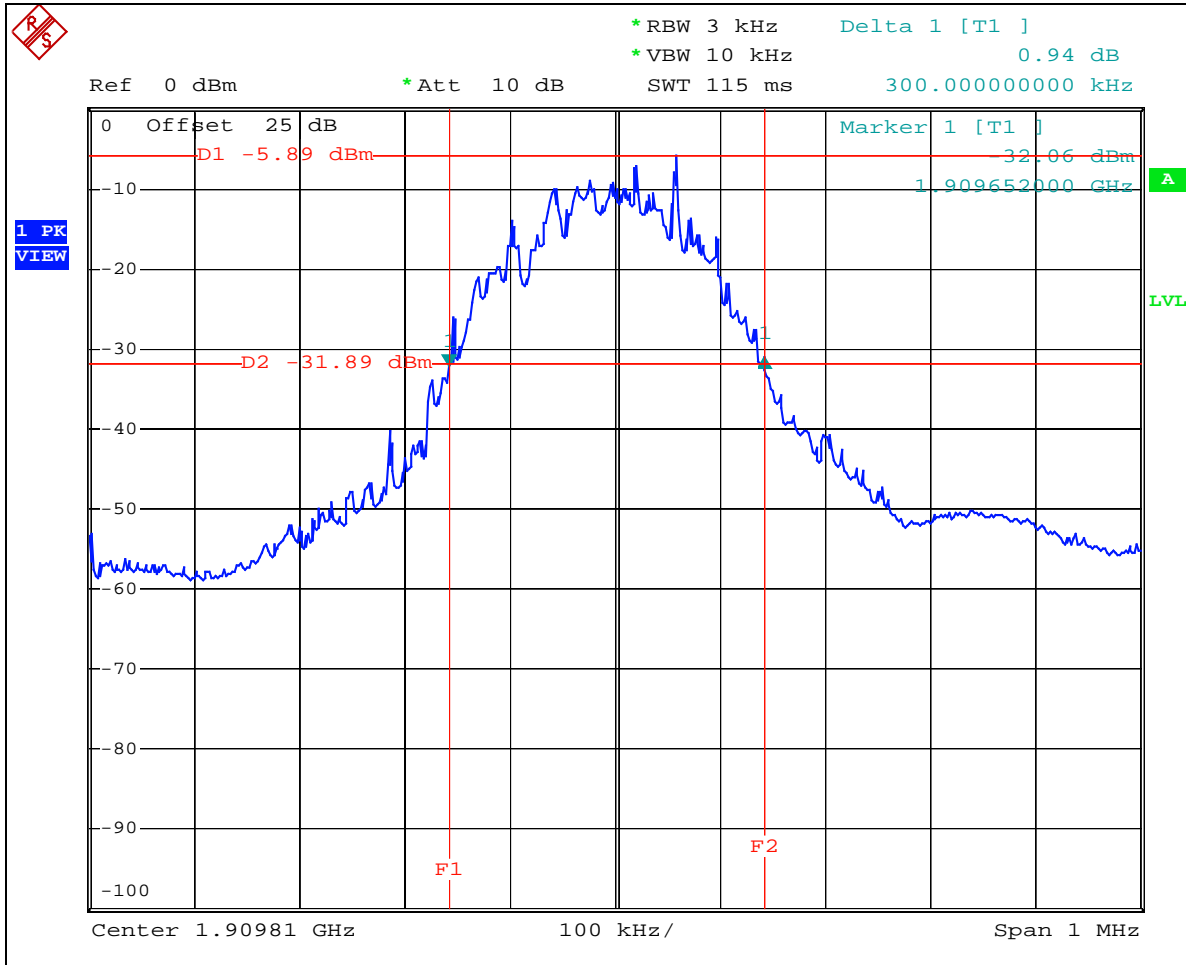

Date: 15.APR.2004 21:16:14



4.5. BAND EDGE MEASUREMENT

4.5.1. LIMITS OF BAND EDGE MEASUREMENT

The PCS frequency bands refer to the FCC 24.229 rule. According to FCC 24.238(b) specified that emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. Then we measure that the bandwidth is about 300kHz and the resolution bandwidth is 3kHz.

4.5.2. TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
* ROHDE & SCHWARZ Spectrum Analyzer	FSP40	100035	Apr. 15, 2005
* ROHDE & SCHWARZ Universal Radio Communication Tester	CMU200	836072/086	Apr. 21, 2005
* Mini-Circuits Power Splitter	ZAPD-4	400005	NA
* Hewlett Packard RF cable	8120-6192	01428251	NA
* JFW 20dB attenuation	50HF-020-SMA	NA	NA
* Suhner RF cable	Sucoflex104	204850/4	NA

NOTE: 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
 2. "*" = These equipments are used for the final measurement.

4.5.3. TEST SETUP

Same as Item 4.2.4 (Conducted Power Setup)



4.5.4. TEST PROCEDURES

- a. The EUT was set up for the maximum peak power with GPRS link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 2 channels, 512 and 810(low and high operational frequency range.)
- b. The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. This splitter loss and cable loss are the worst loss 4dB in the transmitted path track.
- c. The center frequency of spectrum is the band edge frequency and span is 2 MHz. RB of the spectrum is 3kHz and VB of the spectrum is 10kHz.
- d. Record the max trace plot into the test report.


4.5.5. EUT OPERATING CONDITION

- a. Plug the EUT in a notebook system placed on a testing table.
- b. The notebook system makes a phone call to the GSM simulator.
- c. The GSM simulator station system controlled an EUT to export maximum output power under transmission mode and specific channel frequency.
- d. The notebook system sent "H" messages to its screen.
- e. The notebook system sent "H" messages to modem.
- f. The notebook system sent "H" messages to printer, and the printer prints them on paper.
- g. Repeated d ~ f.



4.5.6. TEST RESULTS


Lower Band Edge:

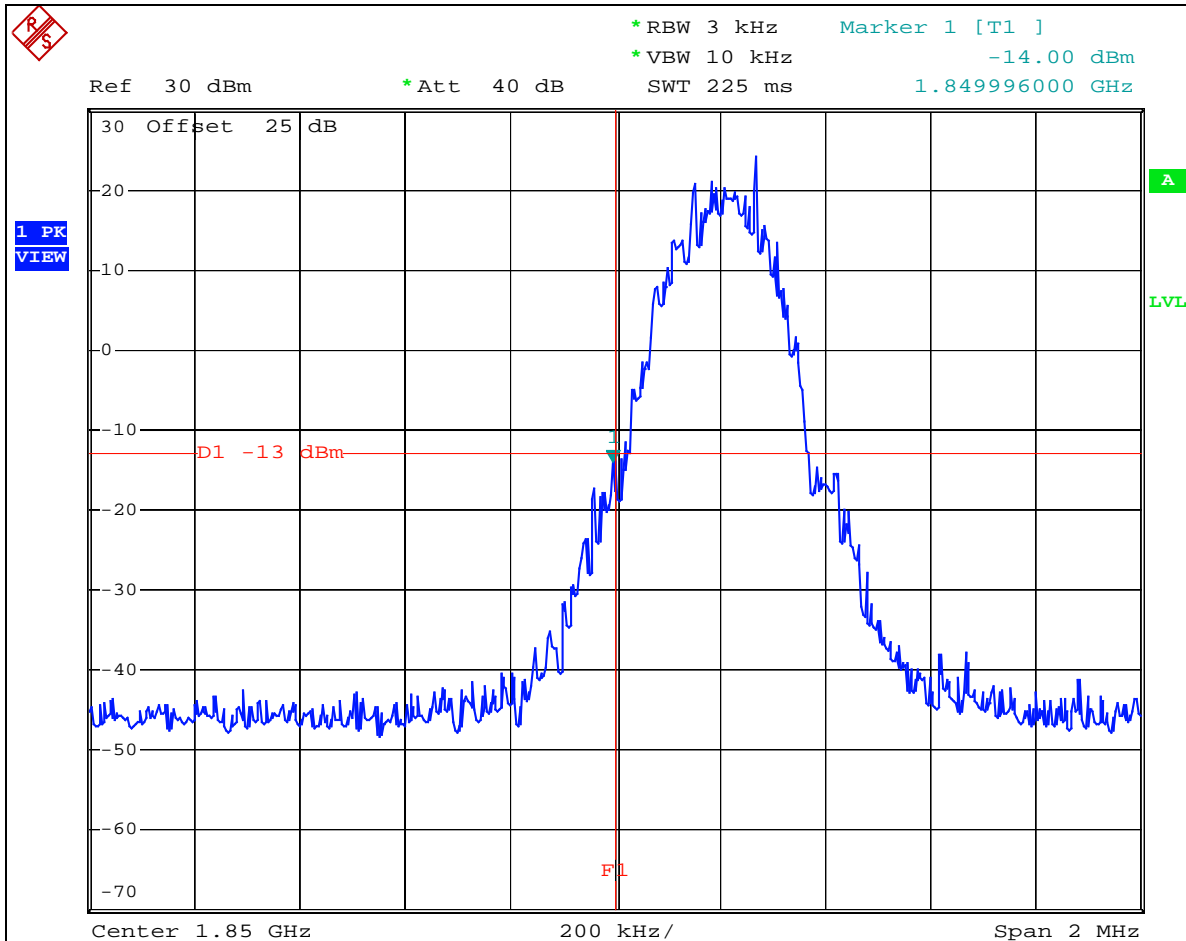

Date: 15.APR.2004 21:39:13



Higher Band Edge:

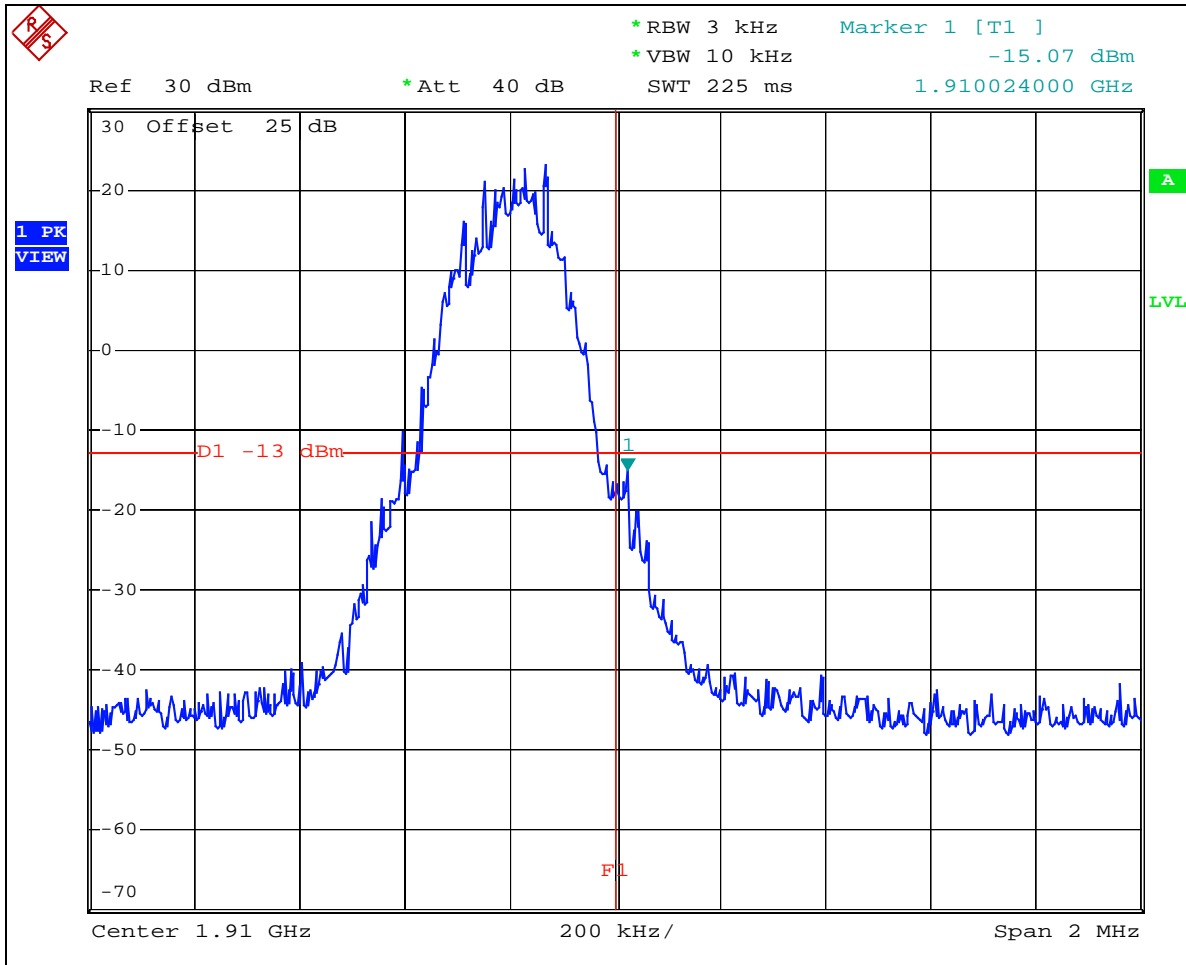

Date: 15.APR.2004 21:38:16



4.6. CONDUCTED SPURIOUS EMISSIONS

4.6.1. LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

In the FCC 24.238(a), On any frequency outside a licensee’s frequency block within USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. The limit translates in the relevant power range (1 to 0.001W). At 1W(Power Control Level 0) the specified minimum attenuation becomes 43dB and the limit of emission equal to -13dBm . At 0.001W(Power Control Level 15) the specified minimum attenuation becomes 13dB and the emission of limit equal to -13dBm . So the limit of emission is the same absolute specified line. In the FCC 24.238(c), When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee’s frequency block edges (low channel 512 and high channel 810), both upper and lower edges are compliance with FCC 24.238(b), Adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

4.6.2. TEST INSTRUMENTS


DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
* ROHDE & SCHWARZ Spectrum Analyzer	FSP40	100035	Apr. 15, 2005
* ROHDE & SCHWARZ Signal Generator	SMP04	10001	May 05, 2004
* ROHDE & SCHWARZ Universal Radio Communication Tester	CMU200	836072/086	Apr. 21, 2005
* Wainwright Instruments Band Reject Filter	WRCG1850/1910- 1830/1930- 60/10SS	SN1	NA
* Wainwright Instruments High Pass Filter	WHK3.1/18G-10SS	SN1	NA
* Mini-Circuits Power Splitter	ZAPD-4	400005	NA
* Hewlett Packard RF cable	8120-6192	01428251	NA
* JFW 20dB attenuation	50HF-020-SMA	NA	NA
* Suhner RF cable	Sucoflex104	204850/4	NA

NOTE: 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
 2. “*” = These equipments are used for the final measurement.

4.6.3. TEST PROCEDURE

- a. The EUT was set up for the maximum peak power with GPRS link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels, 512, 661 and 810(low, middle and high operational frequency range.)
- b. The conducted spurious emission used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. This splitter loss and cable loss are the worst loss 4dB in the transmitted path track.
- c. When the spectrum scanned from 9kHz to 3GHz, it shall be connected to the band reject filter attenuated the carried frequency. The spectrum set RB/VB 1MHz.
- d. When the spectrum scanned from 3kHz to 20GHz, it shall be connected to the high pass filter attenuated the carried frequency. The spectrum set RB/VB 1MHz.

4.6.4. TEST SETUP

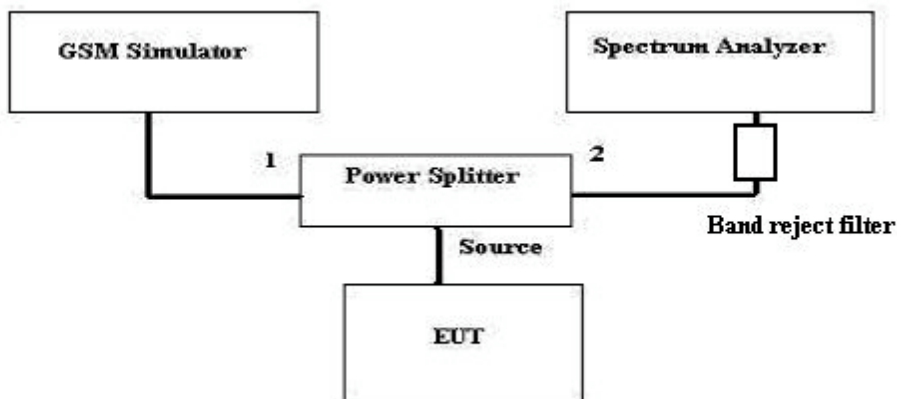




4.6.5. EUT OPERATING CONDITIONS

- a. Plug the EUT in a notebook system placed on a testing table.
- b. The notebook system makes a phone call to the GSM simulator.
- c. The GSM simulator station system controlled an EUT to export maximum output power under transmission mode and specific channel frequency.
- d. The notebook system sent "H" messages to its screen.
- e. The notebook system sent "H" messages to modem.
- f. The notebook system sent "H" messages to printer, and the printer prints them on paper.
- g. Repeated d ~ f.




4.6.6. TEST RESULTS

Channel 512 (9kHz~3GHz):

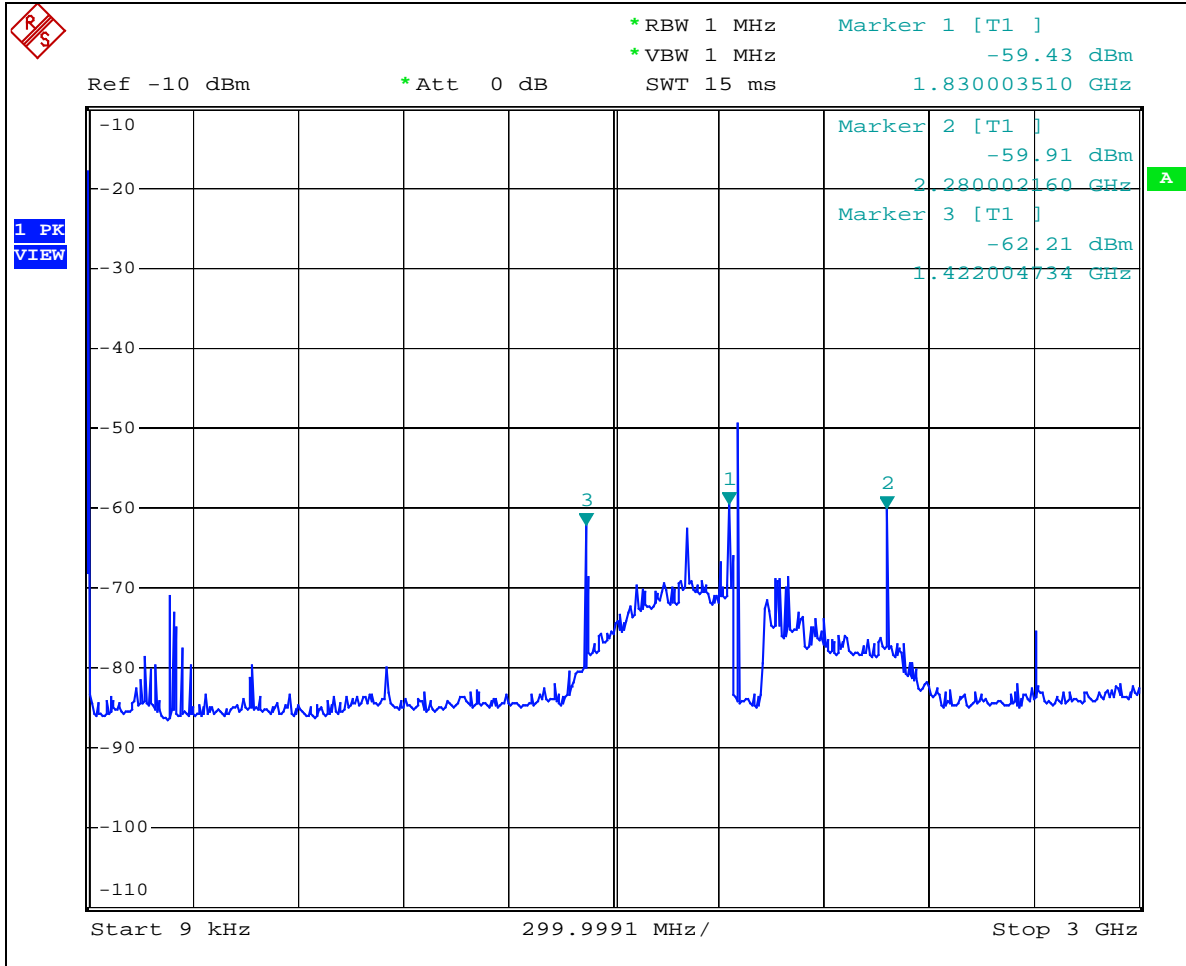




Channel 512 (3GHz~10GHz):

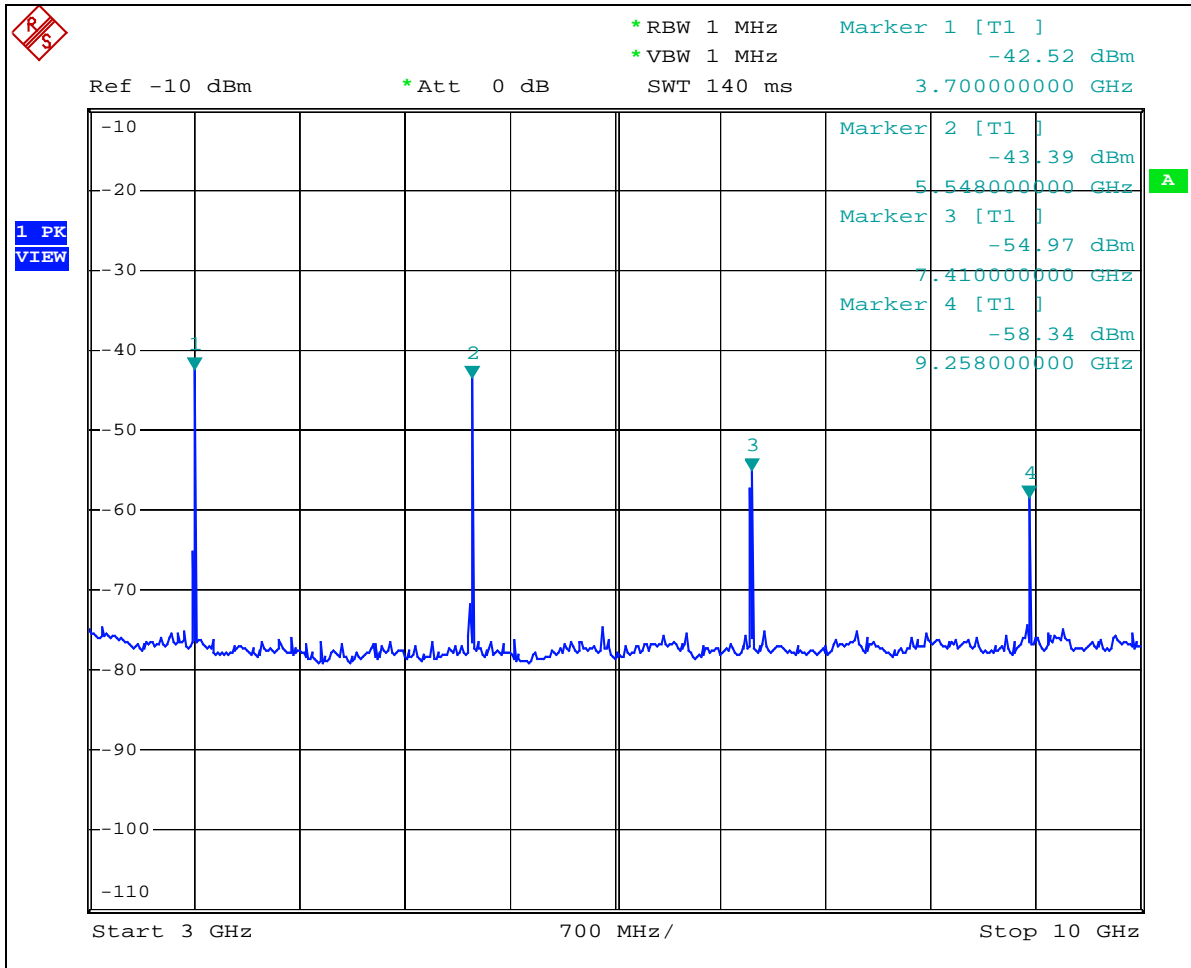

Date: 19.APR.2004 16:13:06




Channel 512 (10GHz~20GHz):

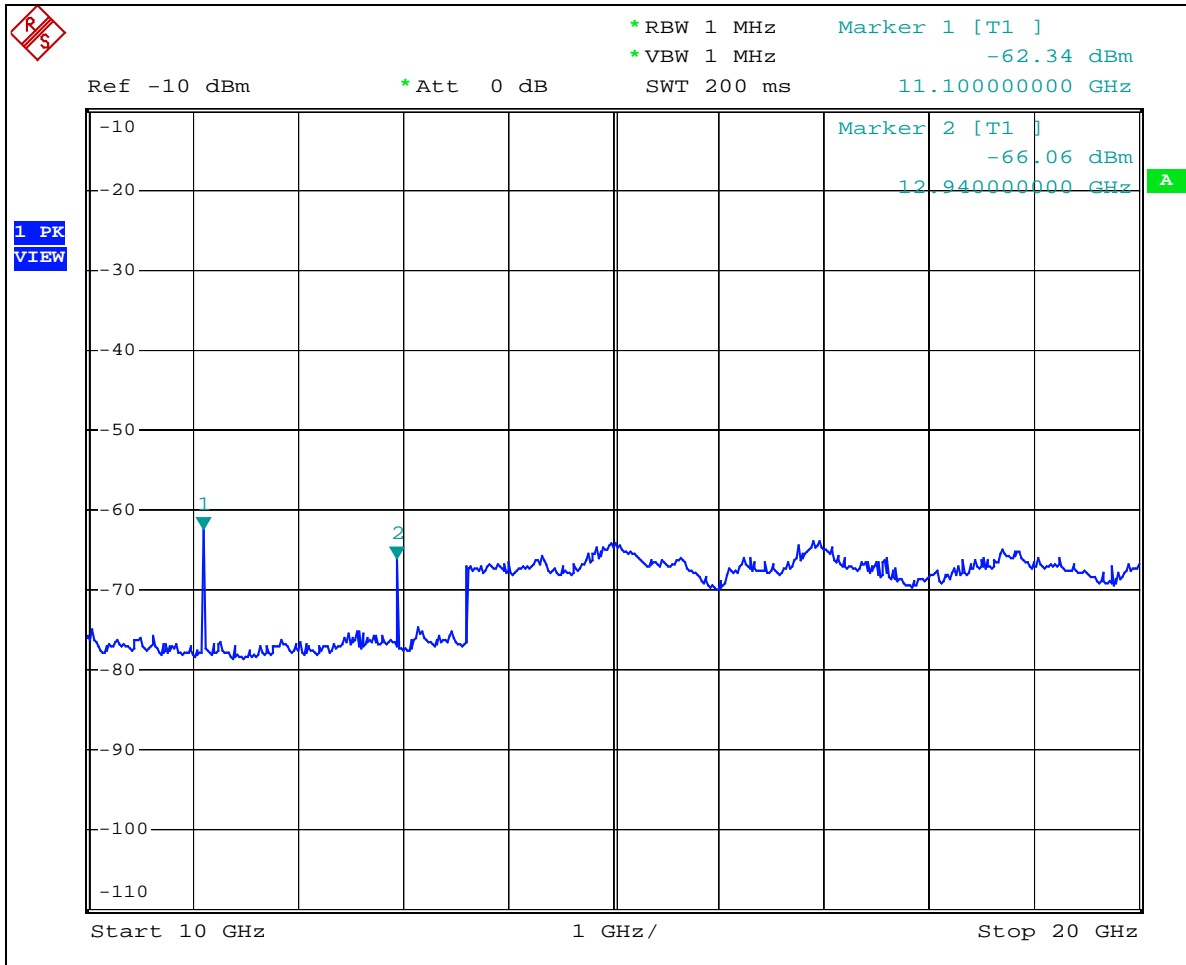

Date: 19.APR.2004 16:14:10




Channel 661 (9kHz~3GHz):

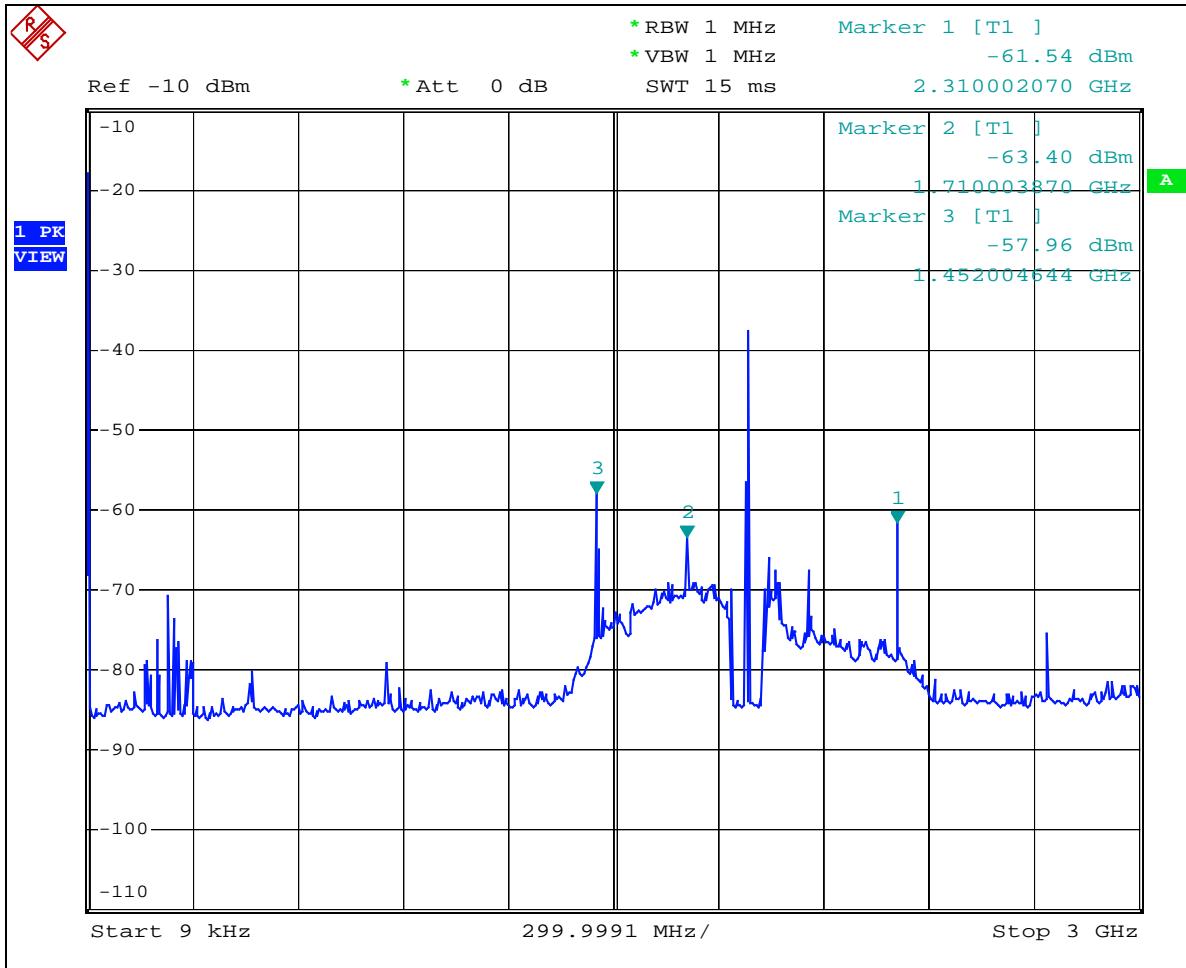

Date: 15.APR.2004 20:46:48




Channel 661 (3GHz~10GHz):

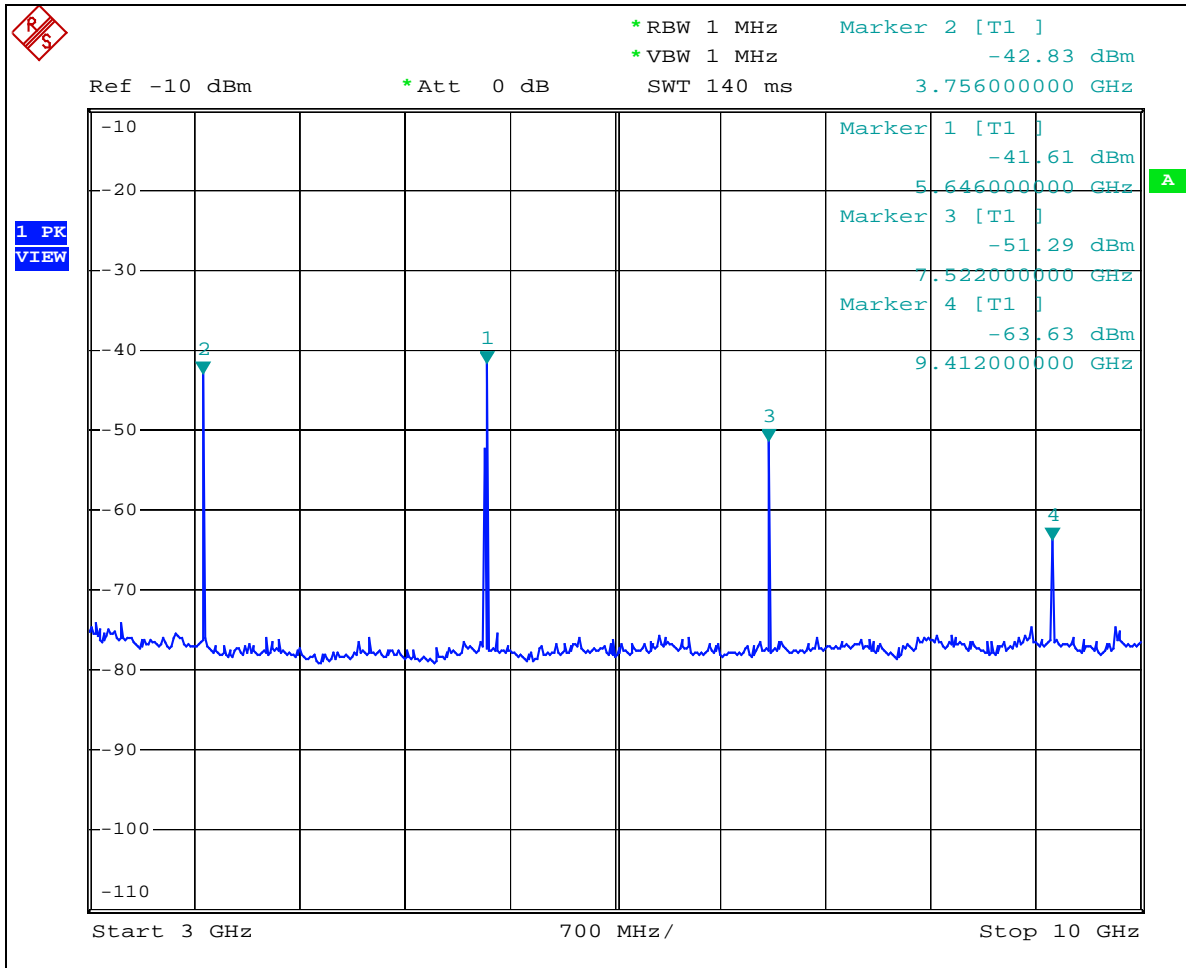

Date: 19.APR.2004 16:14:50




Channel 661 (10GHz~20GHz):

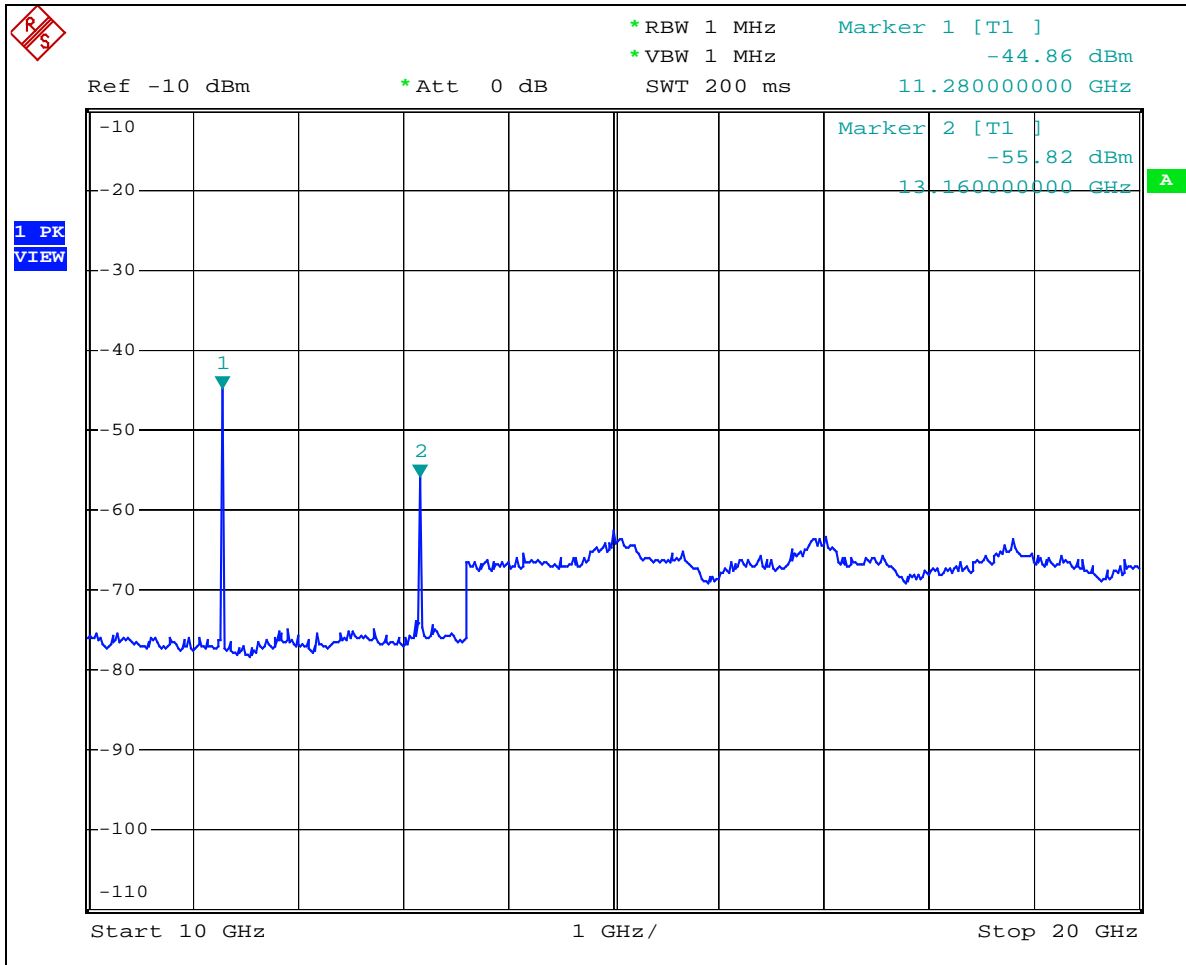

Date: 19.APR.2004 16:15:44




Channel 810 (9kHz~3GHz):

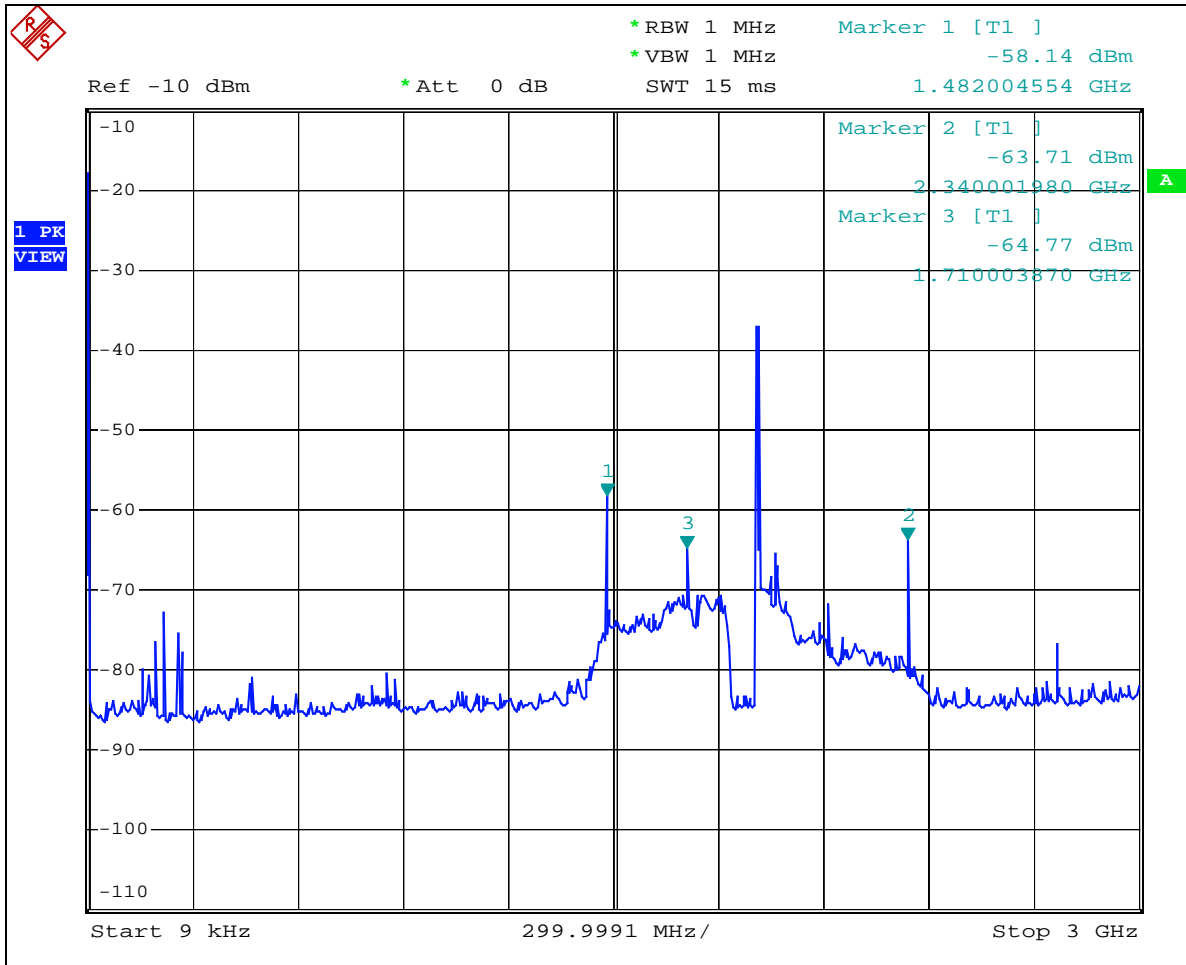

Date: 15.APR.2004 20:51:33




Channel 810 (3GHz~10GHz):

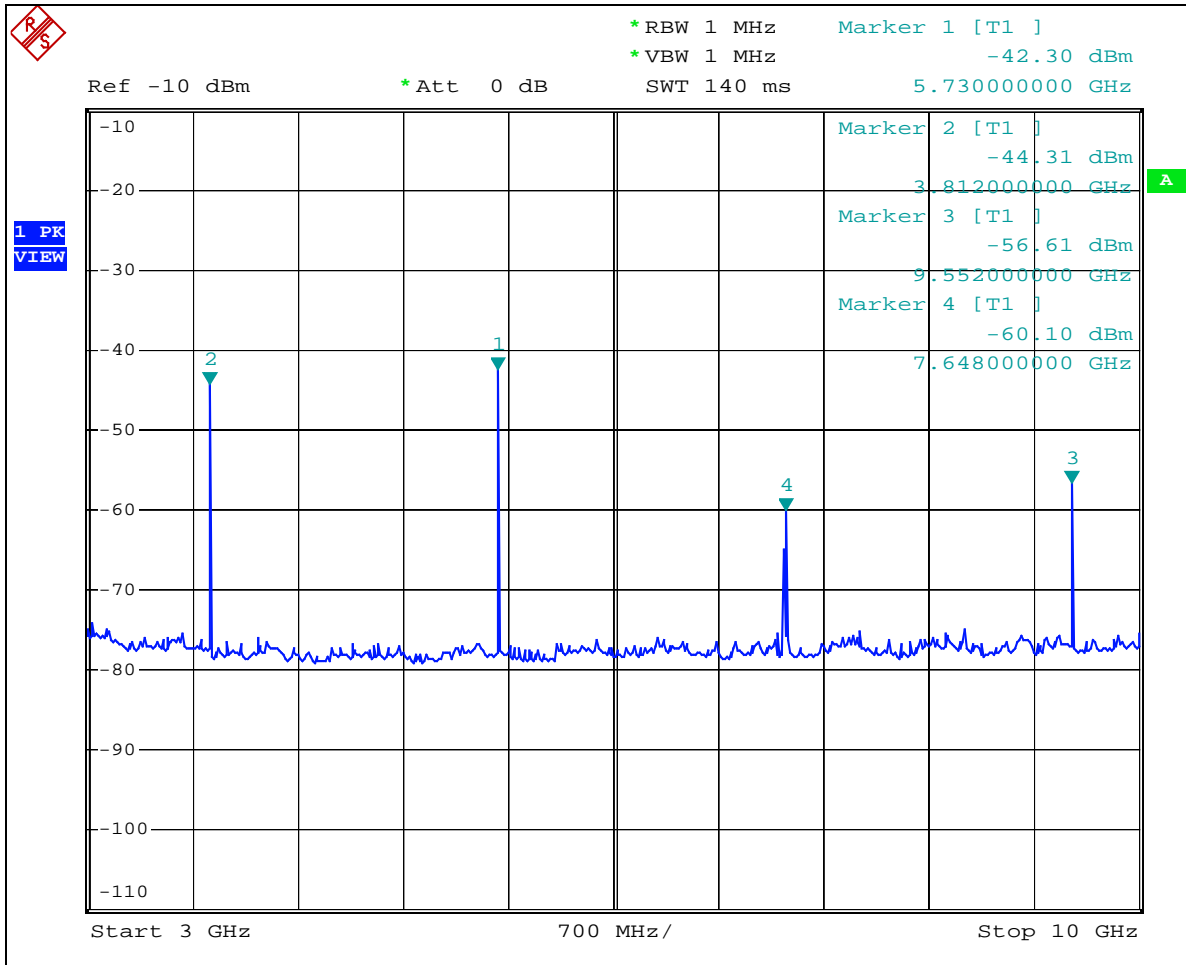

Date: 15.APR.2004 20:53:01



Channel 810 (10GHz~20GHz):

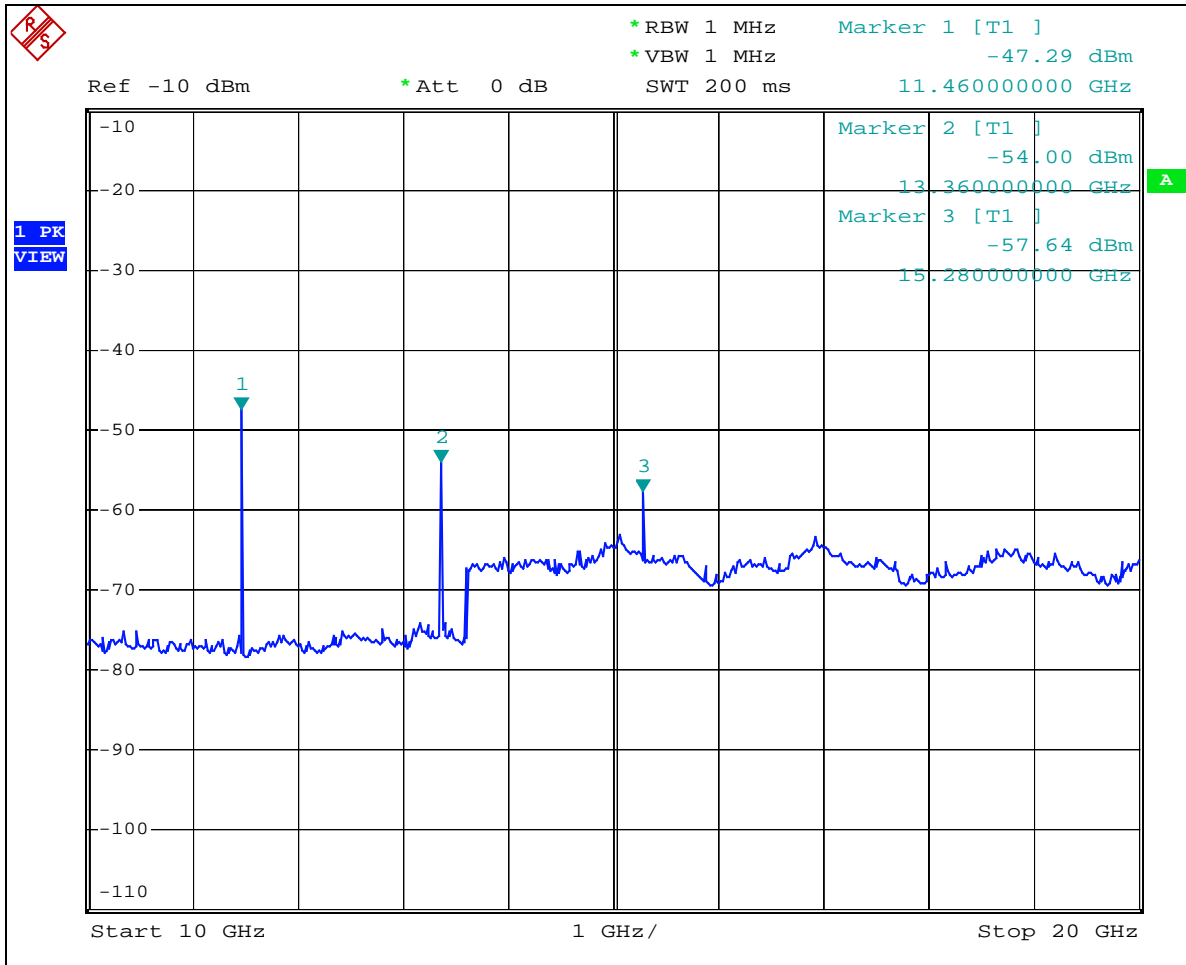

Date: 15.APR.2004 20:56:24



EUT	GPRS PC Card	MODEL	GP00001-00C02
MODE	Tx Channel 512	POWER CONTROL LEVEL	0
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak
ENVIRONMENTAL CONDITIONS	21 deg. C, 65 % RH, 991 hPa	TESTED BY: Gary Chang	

CONDUCTED SPURIOUS EMISSION					
Frequency (MHz)	Raw (dBm)	Correction Factor (dB)	Conducted Level (dBm)	Limit (dBm)	Margin
1422.00	-62.21	3.20	-59.01	-13.00	-46.01
1830.00	-59.43	2.70	-56.73	-13.00	-43.73
2280.00	-59.91	3.00	-56.91	-13.00	-43.91
3700.00	-42.52	2.50	-40.02	-13.00	-27.02
5548.00	-43.39	4.00	-39.39	-13.00	-26.39
7410.00	-54.97	4.10	-50.87	-13.00	-37.87
9258.00	-58.34	3.00	-55.34	-13.00	-42.34
11000.00	-62.34	3.10	-59.24	-13.00	-46.24
12940.00	-66.06	1.50	-64.56	-13.00	-51.56

NOTE: 1. Peak Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).

2. Correction Factor (dB) = Power Splitter Loss (dB) + Cable Loss (dB).



EUT	GPRS PC Card	MODEL	GP00001-00C02
MODE	Tx Channel 661	POWER CONTROL LEVEL	0
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak
ENVIRONMENTAL CONDITIONS	21 deg. C, 65 % RH, 991 hPa	TESTED BY: Gary Chang	

CONDUCTED SPURIOUS EMISSION					
Frequency (MHz)	Raw (dBm)	Correction Factor (dB)	Conducted Level (dBm)	Limit (dBm)	Margin
1452.00	-57.96	3.30	-54.66	-13.00	-41.66
1710.00	-63.40	2.60	-60.80	-13.00	-47.80
2310.00	-61.54	2.90	-58.64	-13.00	-45.64
3756.00	-42.83	2.60	-40.23	-13.00	-27.23
5646.00	-41.61	4.10	-37.51	-13.00	-24.51
7520.00	-51.29	4.30	-46.99	-13.00	-33.99
9412.00	-63.63	2.80	-60.83	-13.00	-47.83
11280.00	-44.83	3.30	-41.53	-13.00	-28.53
13160.00	-55.82	1.80	-54.02	-13.00	-38.02

NOTE: 1. Peak Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).
 2. Correction Factor (dB) = Power Splitter Loss (dB) + Cable Loss (dB).



EUT	GPRS PC Card	MODEL	GP00001-00C02
MODE	Tx Channel 810	POWER CONTROL LEVEL	0
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak
ENVIRONMENTAL CONDITIONS	21 deg. C, 65 % RH, 991 hPa	TESTED BY: Gary Chang	

CONDUCTED SPURIOUS EMISSION					
Frequency (MHz)	Raw (dBm)	Correction Factor (dB)	Conducted Level (dBm)	Limit (dBm)	Margin
1482.00	-58.14	3.20	-54.94	-13.00	-41.94
1710.00	-64.77	2.70	-62.07	-13.00	-49.07
2340.00	-63.71	2.50	-61.21	-13.00	-48.21
3812.00	-44.31	2.70	-41.61	-13.00	-28.61
5730.00	-42.30	4.30	-38.00	-13.00	-25.00
7648.00	-60.10	5.10	-55.00	-13.00	-42.00
9552.00	-56.61	3.70	-52.91	-13.00	-39.91
11460.00	-47.29	2.90	-44.39	-13.00	-31.39
13360.00	-54.00	1.80	-52.20	-13.00	-39.20
15280.00	-57.64	5.4	-52.24	-13.00	-39.24

NOTE: 1. Peak Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).
 2. Correction Factor (dB) = Power Splitter Loss (dB) + Cable Loss (dB).



4.7. RADIATED EMISSION MEASUREMENT

4.7.1. LIMITS OF RADIATED EMISSION MEASUREMENT

In the FCC 24.238(a), On any frequency outside a licensee's frequency block within USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. The limit translates in the relevant power range (1 to 0.001W). At 1W(Power Control Level 0) the specified minimum attenuation becomes 43dB and the limit of emission equal to -13dBm . At 0.001W(Power Control Level 15) the specified minimum attenuation becomes 13dB and the emission of limit equal to -13dBm . So the limit of emission is the same absolute specified line.



4.7.2. TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESIB7	100188	Jan. 13, 2005
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Dec. 15, 2004
BILOG Antenna SCHWARZBECK	VULB9168	9168-157	Feb. 03, 2005
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-407	Feb. 03, 2005
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA 9170241	Feb. 23, 2005
Preamplifier Agilent	8449B	3008A01961	Jan. 22, 2005
Preamplifier Agilent	8447D	2944A10629	Jan. 14, 2005
RF signal cable HUBER+SUHNER	SUCOFLEX 104	218182/4	Mar. 04, 2005
RF signal cable HUBER+SUHNER	SUCOFLEX 104	218194/4	Mar. 04, 2005
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower ADT.	AT100	AT93021702	NA
Turn Table ADT.	TT100.	TT93021702	NA
Controller ADT.	SC100.	SC93021702	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 2.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The IC Site Registration No. is IC4924-2.



4.7.3. TEST PROCEDURES


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 10 meters away from the receiving antenna, which was mounted on antenna tower and its position at 0.8 m above the ground.
- c. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading and recorded the value.
- d. The EUT is replaced by a horn antenna connected to a signal generator tuned to the frequency of emission.
- e. The signal generator level has to be adjusted to have the same emission nature.
- f. The radiated power can be calculated via the factor and antenna gain.
- g. Repeat step 1-6 for horizontal polarization.

NOTE: 1. The resolution bandwidth of spectrum analyzer is 10 kHz and the video bandwidth is 300 kHz for spurious emission below 1GHz.
2. The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for spurious emission above 1GHz.
3. The resolution bandwidth of spectrum analyzer is 100kHz and the video bandwidth is 100kHz for the transmitter output measurement,.

4.7.4. DEVIATION FROM TEST STANDARD

No deviation

4.7.5. TEST SETUP

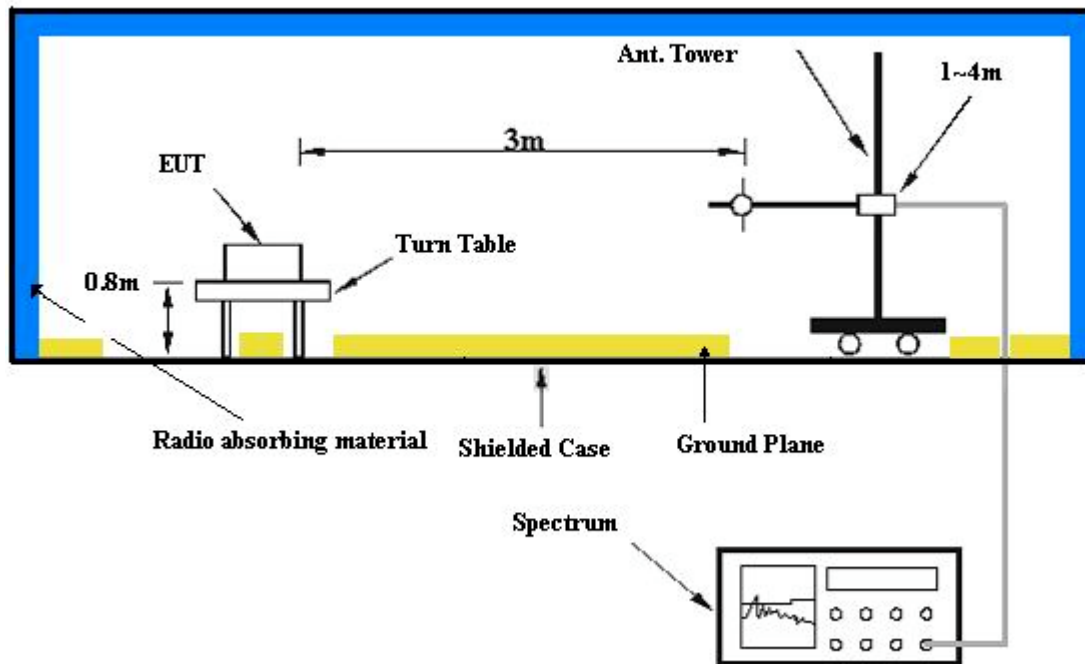

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.7.6. EUT OPERATING CONDITIONS

- Plug the EUT in a notebook system placed on a testing table.
- The notebook system makes a phone call to the GSM simulator.
- The GSM simulator station system controlled an EUT to export maximum output power under transmission mode and specific channel frequency.
- The notebook system sent "H" messages to its screen.
- The notebook system sent "H" messages to modem.
- The notebook system sent "H" messages to printer, and the printer prints them on paper.
- Repeated d ~ f.



4.7.7. TEST RESULTS

EUT	GPRS PC Card	MODEL	GP00001-00C02
MODE	TX connected Mode A Channel 512	FREQUENCY RANGE	Below 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	22 deg. C, 60 % RH, 991 hPa	TESTED BY: Steven Lu	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	123.31	30.56 QP	43.50	-12.94	3.00 H	241	17.30	13.26
2	199.12	32.75 QP	43.50	-10.75	1.00 H	10	21.29	11.46
3	224.39	28.53 QP	46.00	-17.47	1.25 H	76	16.11	12.42
4	249.66	28.42 QP	46.00	-17.58	1.00 H	94	15.20	13.22
5	331.30	43.71 QP	46.00	-2.29	1.00 H	25	28.49	15.22
6	370.18	32.19 QP	46.00	-13.81	1.00 H	307	16.09	16.09
7	432.38	31.91 QP	46.00	-14.09	2.00 H	34	14.31	17.60
8	465.43	40.64 QP	46.00	-5.36	1.75 H	13	22.36	18.27
9	465.43	40.64 QP	46.00	-5.36	1.75 H	13	22.36	18.27
10	498.48	31.44 QP	46.00	-14.56	1.50 H	31	12.73	18.71
11	531.52	30.38 QP	46.00	-15.62	1.50 H	31	11.05	19.34
12	597.62	27.43 QP	46.00	-18.57	1.50 H	241	6.49	20.95
13	731.74	29.77 QP	46.00	-16.23	2.00 H	37	6.69	23.08

NOTE:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. This is valid for all 3 channels.



EUT	GPRS PC Card	MODEL	GP00001-00C02
MODE	TX connected Mode A Channel 512	FREQUENCY RANGE	Below 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	22 deg. C, 60 % RH, 991 hPa	TESTED BY: Steven Lu	

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	35.83	27.18 QP	40.00	-12.82	1.25 V	112	12.61	14.57
2	166.07	28.48 QP	43.50	-15.02	1.00 V	148	14.17	14.30
3	224.39	22.63 QP	46.00	-23.37	1.00 V	175	10.21	12.42
4	249.66	24.64 QP	46.00	-21.36	2.00 V	316	11.43	13.22
5	333.25	36.09 QP	46.00	-9.91	1.25 V	304	20.82	15.26
6	376.01	33.61 QP	46.00	-12.39	1.25 V	139	17.38	16.22
7	432.38	27.08 QP	46.00	-18.92	2.00 V	52	9.47	17.60
8	465.43	37.83 QP	46.00	-8.17	1.75 V	61	19.55	18.27
9	498.48	25.80 QP	46.00	-20.20	1.75 V	61	7.09	18.71
10	531.52	26.07 QP	46.00	-19.93	1.25 V	52	6.73	19.34
11	597.62	24.40 QP	46.00	-21.60	1.00 V	37	3.46	20.95
12	817.27	28.43 QP	46.00	-17.57	1.50 V	160	4.49	23.95
13	931.96	28.78 QP	46.00	-17.22	1.25 V	316	3.33	25.45

NOTE:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. This is valid for all 3 channels.



EUT	GPRS PC Card	MODEL	GP00001-00C02
MODE	TX connected Mode B Channel 512	FREQUENCY RANGE	Below 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	21 deg. C, 60 % RH, 991 hPa	TESTED BY: Steven Lu	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	123.31	29.46 QP	43.50	-14.04	3.00 H	310	16.20	13.26
2	199.12	29.36 QP	43.50	-14.14	1.75 H	220	17.90	11.46
3	224.39	28.64 QP	46.00	-17.36	1.50 H	76	16.22	12.42
4	249.66	29.61 QP	46.00	-16.39	1.00 H	88	16.39	13.22
5	333.25	40.73 QP	46.00	-5.27	1.00 H	190	25.47	15.26
6	368.24	31.59 QP	46.00	-14.41	3.00 H	85	15.54	16.05
7	432.38	29.80 QP	46.00	-16.20	1.75 H	31	12.19	17.60
8	467.37	42.40 QP	46.00	-3.60	1.75 H	37	24.10	18.30
9	500.42	31.56 QP	46.00	-14.44	1.50 H	10	12.82	18.74
10	533.47	33.52 QP	46.00	-12.48	1.50 H	355	14.15	19.37
11	599.56	28.37 QP	46.00	-17.63	1.25 H	256	7.37	21.00
12	640.38	29.23 QP	46.00	-16.77	1.00 H	22	7.67	21.55

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	35.83	25.81 QP	40.00	-14.19	1.00 V	130	11.24	14.57
2	160.24	30.67 QP	43.50	-12.83	1.00 V	196	15.80	14.87
3	199.12	28.78 QP	43.50	-14.72	1.00 V	10	17.32	11.46
4	307.98	31.02 QP	46.00	-14.98	1.50 V	151	16.34	14.68
5	331.30	34.38 QP	46.00	-11.62	1.25 V	169	19.16	15.22
6	348.80	34.53 QP	46.00	-11.47	1.50 V	160	18.91	15.62
7	401.28	31.38 QP	46.00	-14.62	1.00 V	160	14.60	16.78
8	457.66	34.52 QP	46.00	-11.48	1.00 V	136	16.35	18.17
9	465.43	37.00 QP	46.00	-9.00	1.75 V	43	18.72	18.27
10	531.52	27.39 QP	46.00	-18.61	1.00 V	55	8.05	19.34

NOTE:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. This is valid for all 3 channels.



4.8. EFFECTIVE RADIATED POWER MEASUREMENT

4.8.1. LIMITS OF RADIATED EMISSION MEASUREMENT

In the FCC 24.238(a), On any frequency outside a licensee's frequency block within USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. The limit translates in the relevant power range (1 to 0.001W). At 1W(Power Control Level 0) the specified minimum attenuation becomes 43dB and the limit of emission equal to -13dBm . At 0.001W(Power Control Level 15) the specified minimum attenuation becomes 13dB and the emission of limit equal to -13dBm . So the limit of emission is the same absolute specified line.



4.8.2. TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESIB7	100188	Jan. 13, 2005
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Dec. 15, 2004
BILOG Antenna SCHWARZBECK	VULB9168	9168-157	Feb. 03, 2005
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-407	Feb. 03, 2005
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA 9170241	Feb. 23, 2005
Preamplifier Agilent	8449B	3008A01961	Jan. 22, 2005
Preamplifier Agilent	8447D	2944A10629	Jan. 14, 2005
RF signal cable HUBER+SUHNER	SUCOFLEX 104	218182/4	Mar. 04, 2005
RF signal cable HUBER+SUHNER	SUCOFLEX 104	218194/4	Mar. 04, 2005
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower ADT.	AT100	AT93021702	NA
Turn Table ADT.	TT100.	TT93021702	NA
Controller ADT.	SC100.	SC93021702	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 2.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The IC Site Registration No. is IC4924-2.



4.8.3. TEST PROCEDURES


- h. The EUT was placed on the top of a rotating table 0.8 meters above the ground. The table was rotated 360 degrees to determine the position of the highest radiation.
- i. The EUT was set 10 meters away from the receiving antenna, which was mounted on antenna tower and its position at 0.8 m above the ground.
- j. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading and recorded the value.
- k. The EUT is replaced by a horn antenna connected to a signal generator tuned to the frequency of emission.
- l. The signal generator level has to be adjusted to have the same emission nature.
- m. The radiated power can be calculated via the factor and antenna gain.
- n. Repeat step 1-6 for horizontal polarization.

- NOTE:**
- 1. The resolution bandwidth of spectrum analyzer is 10 kHz and the video bandwidth is 300 kHz for spurious emission below 1GHz.
 - 2. The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for spurious emission above 1GHz.
 - 4. The resolution bandwidth of spectrum analyzer is 100kHz and the video bandwidth is 100kHz for the transmitter output measurement,.

4.8.4. DEVIATION FROM TEST STANDARD

No deviation

4.8.5. TEST SETUP

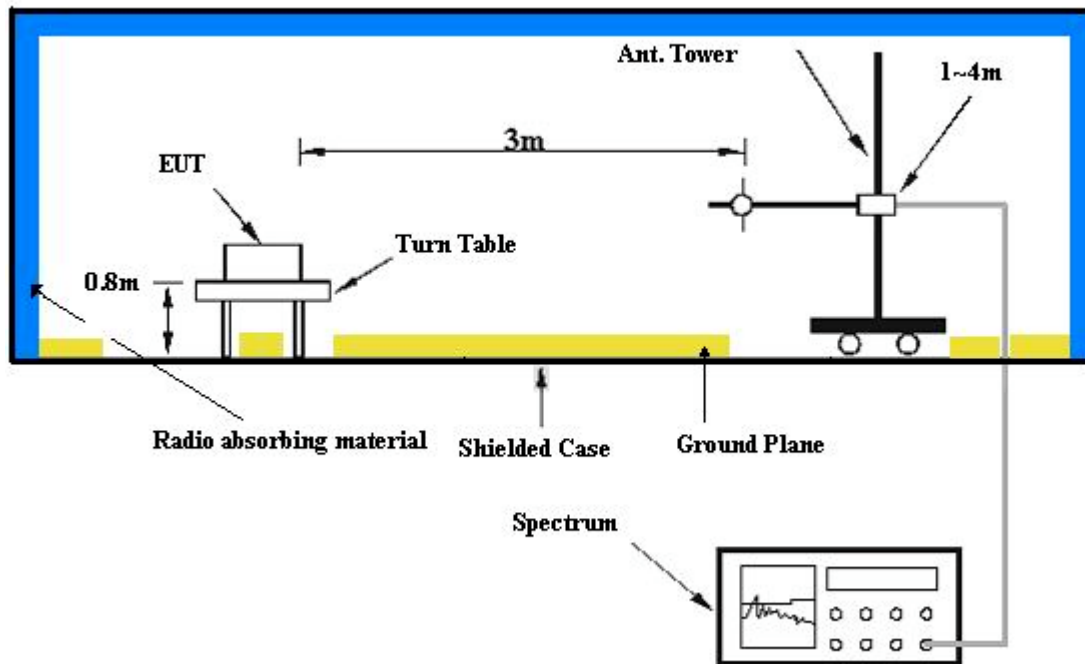

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.8.6. EUT OPERATING CONDITIONS

- h. Plug the EUT in a notebook system placed on a testing table.
- i. The notebook system makes a phone call to the GSM simulator.
- j. The GSM simulator station system controlled an EUT to export maximum output power under transmission mode and specific channel frequency.
- k. The notebook system sent "H" messages to its screen.
- l. The notebook system sent "H" messages to modem.
- m. The notebook system sent "H" messages to printer, and the printer prints them on paper.
- n. Repeated d ~ f.



4.8.7. TEST RESULTS

EUT	GPRS PC Card	MODEL	GP00001-00C02
MODE	TX connected Mode A Channel 512	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	20 deg. C, 69 % RH, 991 hPa
TESTED BY	Gary Chang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	3700.40	56.70	-13.00	-48.87	9.27	-39.60
2	5550.60	54.32	-13.00	-52.37	10.47	-41.90
3	7400.80	57.30	-13.00	-49.44	10.24	-39.20
4	9251.00	60.34	-13.00	-46.73	10.53	-36.20
5	11101.20	60.45	-13.00	-47.64	11.24	-36.40
6	12951.40	59.21	-13.00	-49.00	11.10	-37.90
7	14801.60	63.35	-13.00	-46.70	13.50	-33.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	3700.40	58.47	-13.00	-44.67	9.27	-35.40
2	5550.60	59.55	-13.00	-47.27	10.47	-36.80
3	7400.80	60.91	-13.00	-45.94	10.24	-35.70
4	9251.00	64.02	-13.00	-43.23	10.53	-32.70
5	11101.20	61.16	-13.00	-46.84	11.24	-35.60
6	12951.40	60.17	-13.00	-47.30	11.10	-36.20
7	14801.60	63.25	-13.00	-46.10	13.50	-32.60

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).



EUT	GPRS PC Card	MODEL	GP00001-00C02
MODE	TX connected Mode A Channel 661	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	20 deg. C, 69 % RH, 991 hPa
TESTED BY	Gary Chang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	3760.00	58.40	-13.00	-47.08	9.18	-37.90
2	5640.00	55.39	-13.00	-51.18	10.28	-40.90
3	7520.00	57.05	-13.00	-50.33	10.13	-40.20
4	9400.00	60.99	-13.00	-46.65	10.55	-36.10
5	1280.00	62.98	-13.00	-46.13	12.03	-34.10
6	13160.00	58.62	-13.00	-49.03	11.53	-37.50
7	15040.00	63.76	-13.00	-45.68	12.58	-33.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	3760.00	59.57	-13.00	-46.08	9.18	-36.90
2	5640.00	58.38	-13.00	-48.18	10.28	-37.90
3	7520.00	60.68	-13.00	-46.23	10.13	-36.10
4	9400.00	62.45	-13.00	-44.65	10.55	-34.10
5	1280.00	61.70	-13.00	-47.13	12.03	-35.10
6	13160.00	58.46	-13.00	-49.33	11.53	-37.80
7	15040.00	63.42	-13.00	-45.68	12.58	-33.10

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).



EUT	GPRS PC Card	MODEL	GP00001-00C02
MODE	TX connected Mode A Channel 810	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	20 deg. C, 69 % RH, 991 hPa
TESTED BY	Gary Chang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	3818.40	63.02	-13.00	-44.28	9.27	-35.10
2	5727.60	55.94	-13.00	-51.38	10.47	-41.10
3	7636.80	59.91	-13.00	-47.33	10.24	-37.20
4	9546.00	61.88	-13.00	-45.75	10.53	-35.20
5	11455.20	62.51	-13.00	-46.13	11.24	-34.10
6	13364.40	62.06	-13.00	-46.63	11.10	-35.10
7	15273.60	61.97	-13.00	-47.68	13.50	-35.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	3818.40	62.41	-13.00	-43.08	9.27	-33.90
2	5727.60	60.70	-13.00	-46.38	10.47	-36.10
3	7636.80	58.91	-13.00	-47.63	10.24	-37.50
4	9546.00	63.52	-13.00	-43.75	10.53	-33.20
5	11455.20	63.86	-13.00	-44.53	11.24	-32.50
6	13364.40	60.82	-13.00	-47.43	11.10	-35.90
7	15273.60	61.42	-13.00	-47.68	13.50	-35.10

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).



EUT	GPRS PC Card	MODEL	GP00001-00C02
MODE	TX connected Mode B Channel 512	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	20 deg. C, 69 % RH, 991 hPa
TESTED BY	Gary Chang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	3700.40	56.71	-13.00	-48.89	9.19	-39.70
2	5550.60	55.53	-13.00	-48.39	10.29	-38.10
3	7400.80	53.47	-13.00	-50.33	10.13	-40.20
4	9251.00	54.26	-13.00	-49.40	10.20	-39.20
5	11101.20	55.46	-13.00	-49.53	11.33	-38.20
6	12951.40	57.34	-13.00	-48.20	11.80	-36.40
7	14801.60	62.72	-13.00	-46.70	12.00	-34.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	3700.40	61.06	-13.00	-44.39	9.19	-35.20
2	5550.60	54.70	-13.00	-49.49	10.29	-39.20
3	7400.80	53.83	-13.00	-50.83	10.13	-40.70
4	9251.00	54.96	-13.00	-51.00	10.20	-40.80
5	11101.20	55.90	-13.00	-50.03	11.33	-38.70
6	12951.40	59.32	-13.00	-48.30	11.80	-36.50
7	14801.60	63.06	-13.00	-43.05	12.00	-31.05

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).



EUT	GPRS PC Card	MODEL	GP00001-00C02
MODE	TX connected Mode B Channel 661	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	20 deg. C, 69 % RH, 991 hPa
TESTED BY	Gary Chang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	3760.00	59.03	-13.00	-46.38	9.18	-37.20
2	5640.00	53.09	-13.00	-53.78	10.28	-43.50
3	7520.00	51.81	-13.00	-54.33	10.13	-44.20
4	9400.00	53.49	-13.00	-53.45	10.55	-42.90
5	1280.00	55.96	-13.00	-52.63	12.03	-40.60
6	13160.00	58.69	-13.00	-46.63	11.53	-35.10
7	15040.00	62.93	-13.00	-43.68	12.58	-31.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	3760.00	61.44	-13.00	-41.38	9.18	-32.20
2	5640.00	57.86	-13.00	-46.38	10.28	-36.10
3	7520.00	53.89	-13.00	-50.33	10.13	-40.20
4	9400.00	53.89	-13.00	-53.05	10.55	-42.50
5	1280.00	55.29	-13.00	-50.63	12.03	-38.60
6	13160.00	58.57	-13.00	-46.63	11.53	-35.10
7	15040.00	63.30	-13.00	-45.48	12.58	-32.90

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).



EUT	GPRS PC Card	MODEL	GP00001-00C02
MODE	TX connected Mode B Channel 810	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	20 deg. C, 69 % RH, 991 hPa
TESTED BY	Gary Chang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	3818.40	60.37	-13.00	-45.17	9.27	-35.90
2	5727.60	55.75	-13.00	-51.57	10.47	-41.10
3	7636.80	53.74	-13.00	-53.04	10.24	-42.80
4	9546.00	53.04	-13.00	-54.03	10.53	-43.50
5	11455.20	55.67	-13.00	-52.15	11.24	-40.91
6	13364.40	58.21	-13.00	-49.80	11.10	-38.70
7	15273.60	62.07	-13.00	-48.60	13.50	-35.10



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)
1	3818.40	63.24	-13.00	-39.77	9.27	-30.50
2	5727.60	56.15	-13.00	-51.27	10.47	-40.80
3	7636.80	56.28	-13.00	-50.15	10.24	-39.91
4	9546.00	53.87	-13.00	-51.00	10.53	-40.47
5	11455.20	56.14	-13.00	-52.14	11.24	-40.90
6	13364.40	59.60	-13.00	-47.90	11.10	-36.80
7	15273.60	61.85	-13.00	-45.60	13.50	-32.10


NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

RADIATED EMISSION TEST (Mode A)

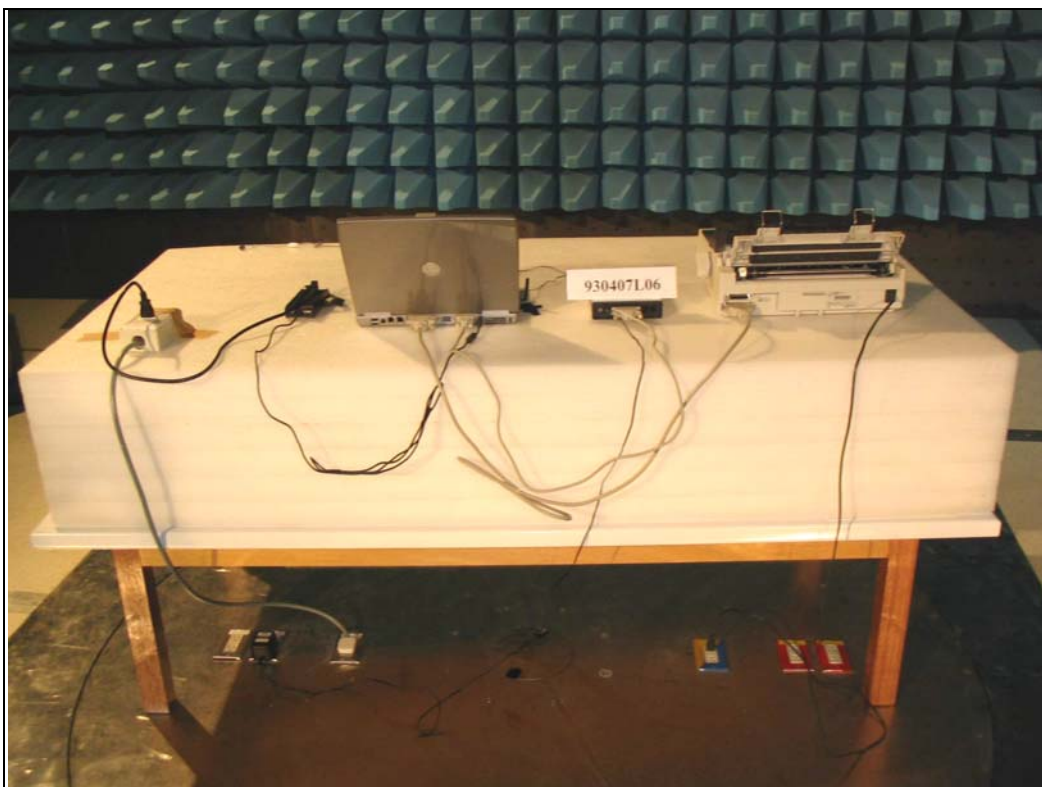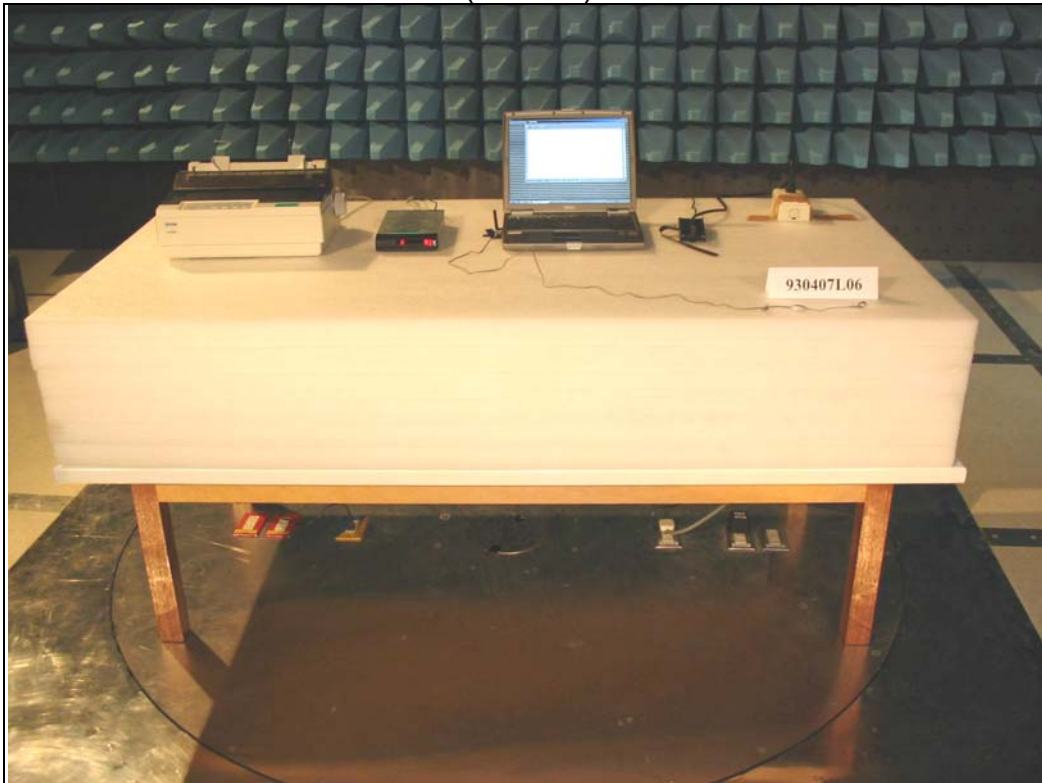

(Mode B)

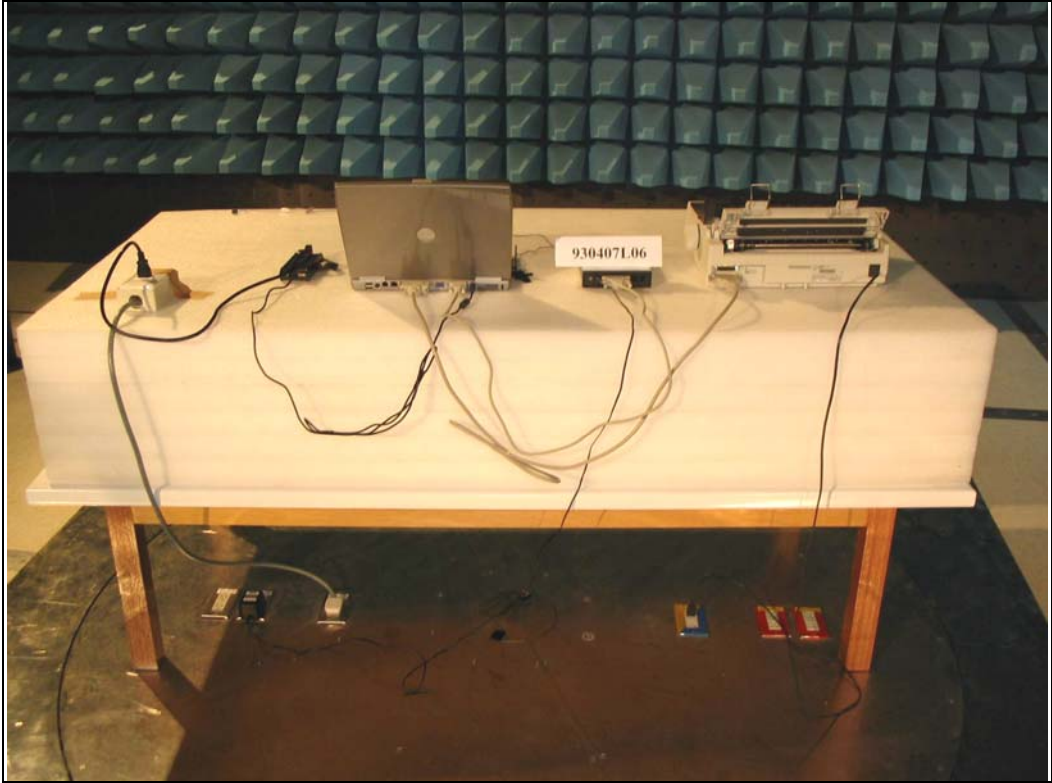



6. INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP, UL
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Linko RF Lab.

Tel: 886-3-3270910

Fax: 886-3-3270892

Email: service@mail.adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.