



Horizontal

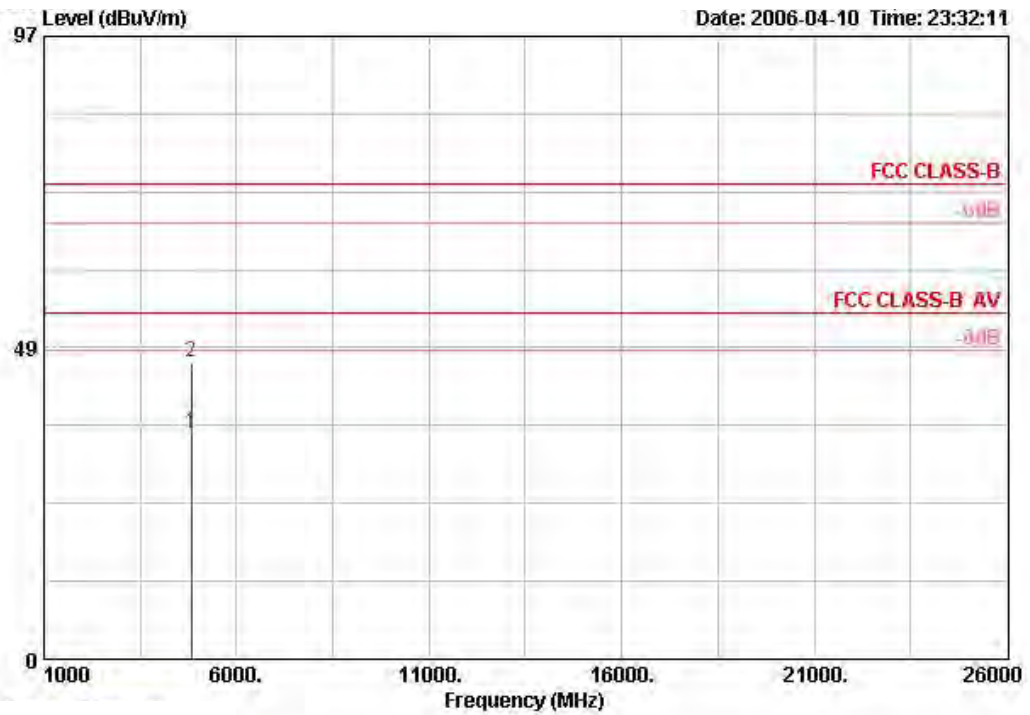

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	4823.960	35.04	-18.96	54.00	33.22	4.68	35.10	32.24	AVERAGE	100	310
2 @	4823.960	46.35	-27.65	74.00	33.22	4.68	35.10	43.56	PEAK	100	310


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11b Channel 6 / Ant. 1

Vertical

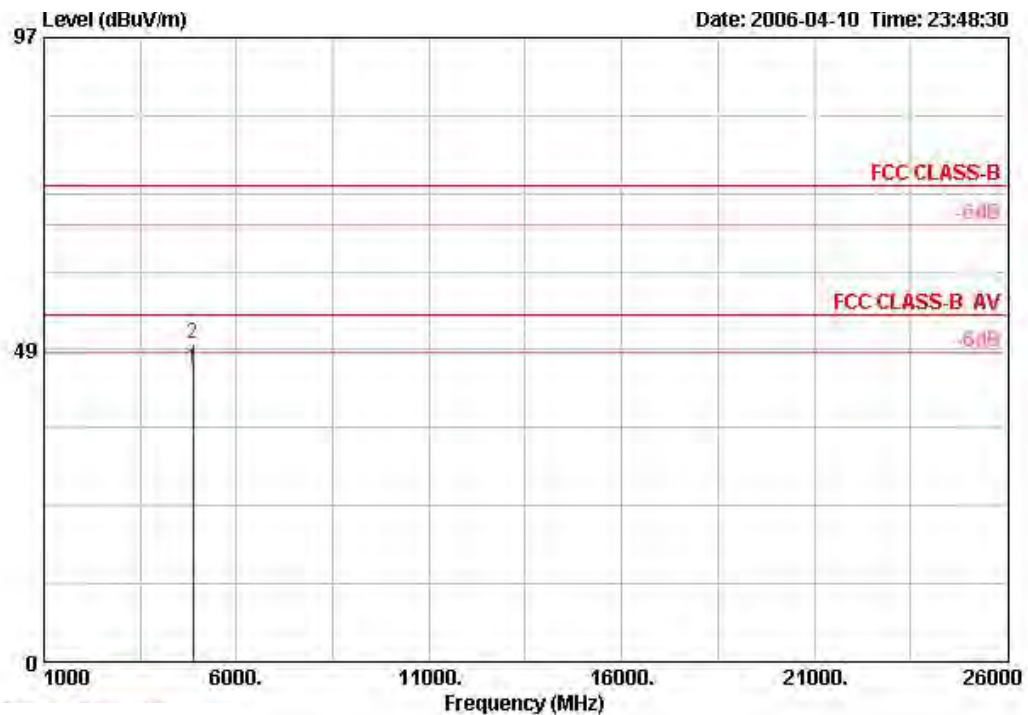

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	4874.060	45.38	-8.62	54.00	33.33	4.69	35.10	42.45	AVERAGE	125	341
2 @	4874.060	49.45	-24.55	74.00	33.33	4.69	35.10	46.52	PEAK	125	341


Horizontal

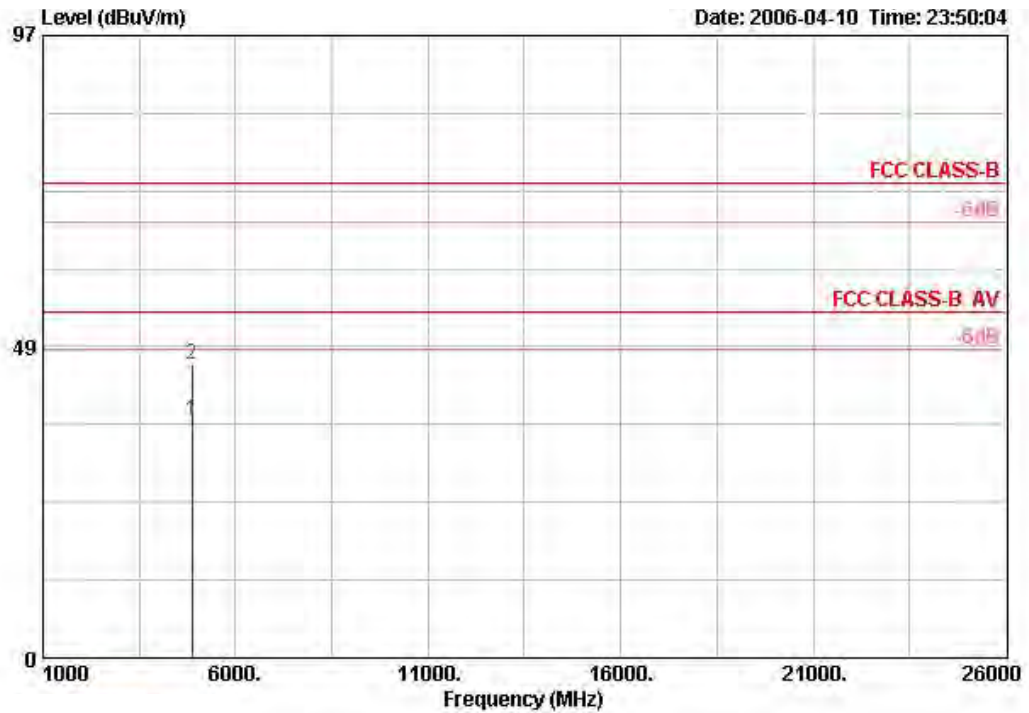

	Freq	Level	Over Limit	Antenna Line	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1 @	4874.000	37.01	-16.99	54.00	33.33	4.69	35.10	34.09 AVERAGE	124	327
2 @	4874.000	45.73	-28.27	74.00	33.33	4.69	35.10	42.80 PEAK	124	327


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11b Channel 11 / Ant. 1

Vertical

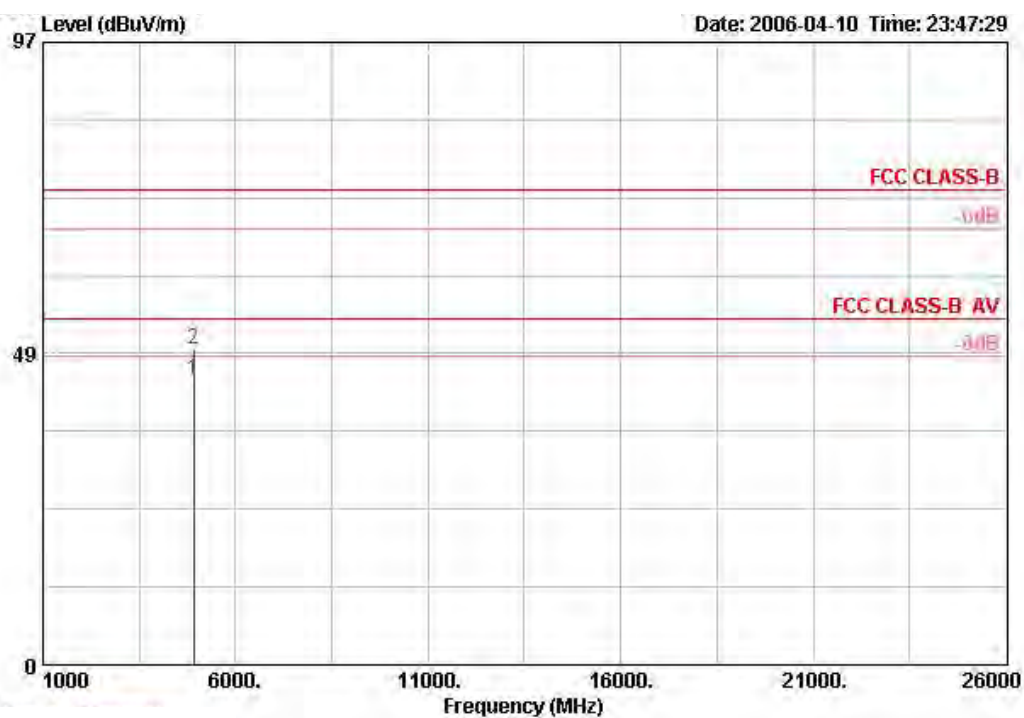

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	4924.000	44.39	-9.61	54.00	33.45	4.73	35.10	41.31	AVERAGE	124	340
2 @	4924.000	49.24	-24.76	74.00	33.45	4.73	35.10	46.17	PEAK	124	340


Horizontal

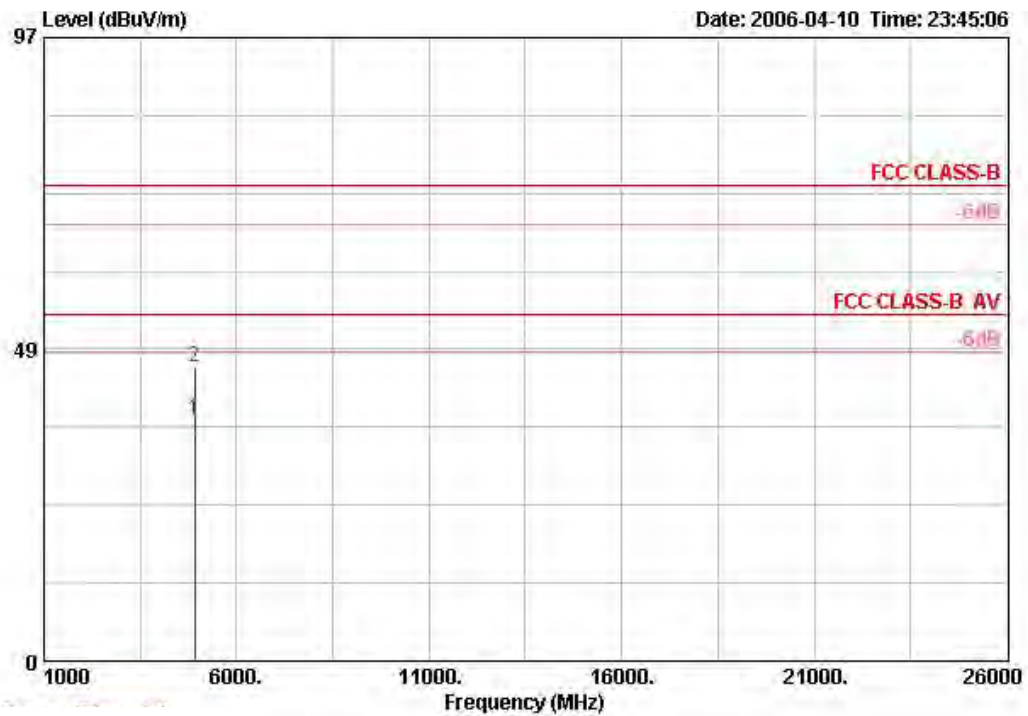

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBUV/m	dB	dBUV/m	dB/m	dB	dB	dBUV		cm	deg
1 @	4924.000	37.49	-16.51	54.00	33.45	4.73	35.10	34.42	AVERAGE	113	309
2 @	4924.000	45.72	-28.28	74.00	33.45	4.73	35.10	42.64	PEAK	113	309


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11g Channel 1 / Ant. 1

Vertical

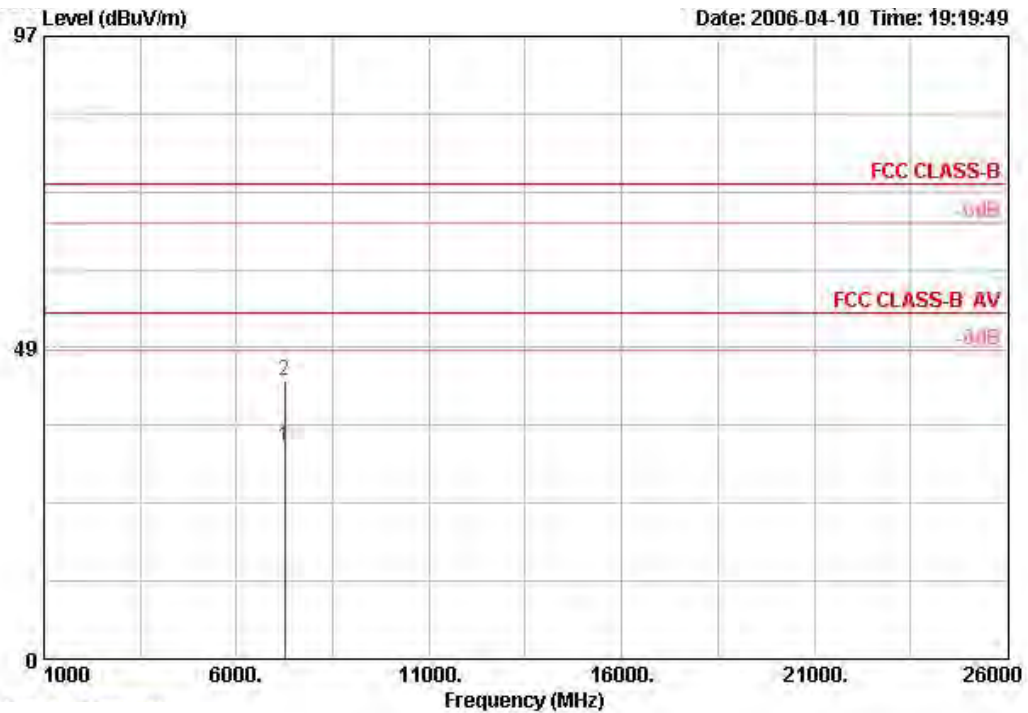

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	7246.900	33.10	-20.90	54.00	33.22	4.68	35.10	30.30	AVERAGE	119	287
2 @	7246.900	43.36	-30.65	74.00	33.22	4.68	35.10	40.56	PEAK	119	287


Horizontal

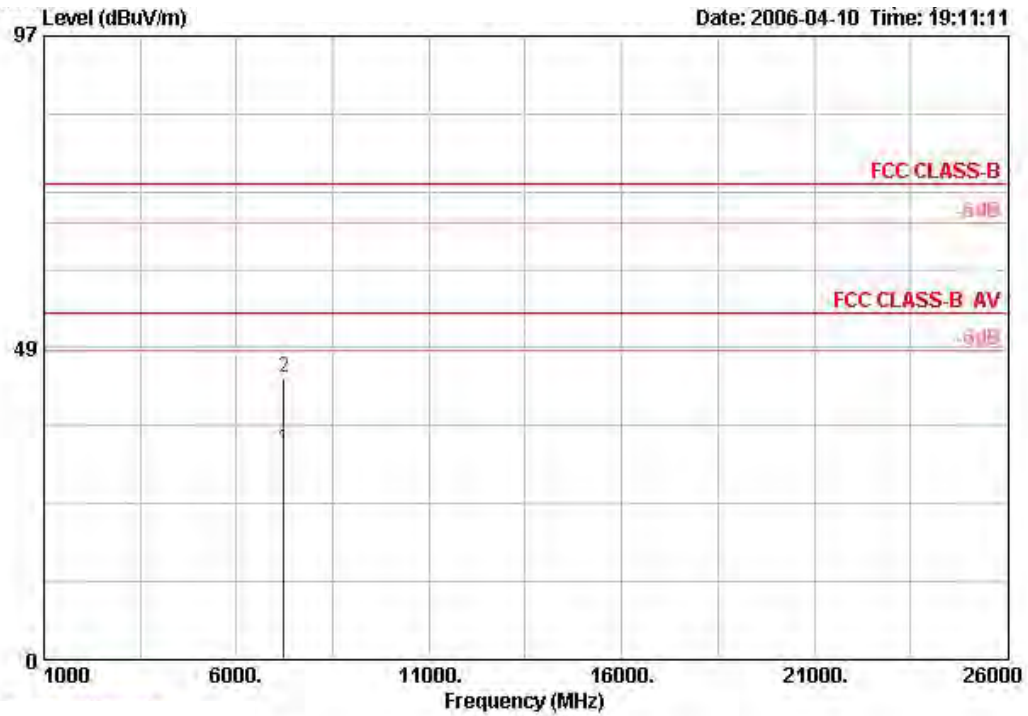

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	7238.200	32.88	-21.12	54.00	33.22	4.68	35.10	30.09	AVERAGE	133	0
2 @	7238.200	43.97	-30.03	74.00	33.22	4.68	35.10	41.18	PEAK	133	0


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11g Channel 6 / Ant. 1

Vertical

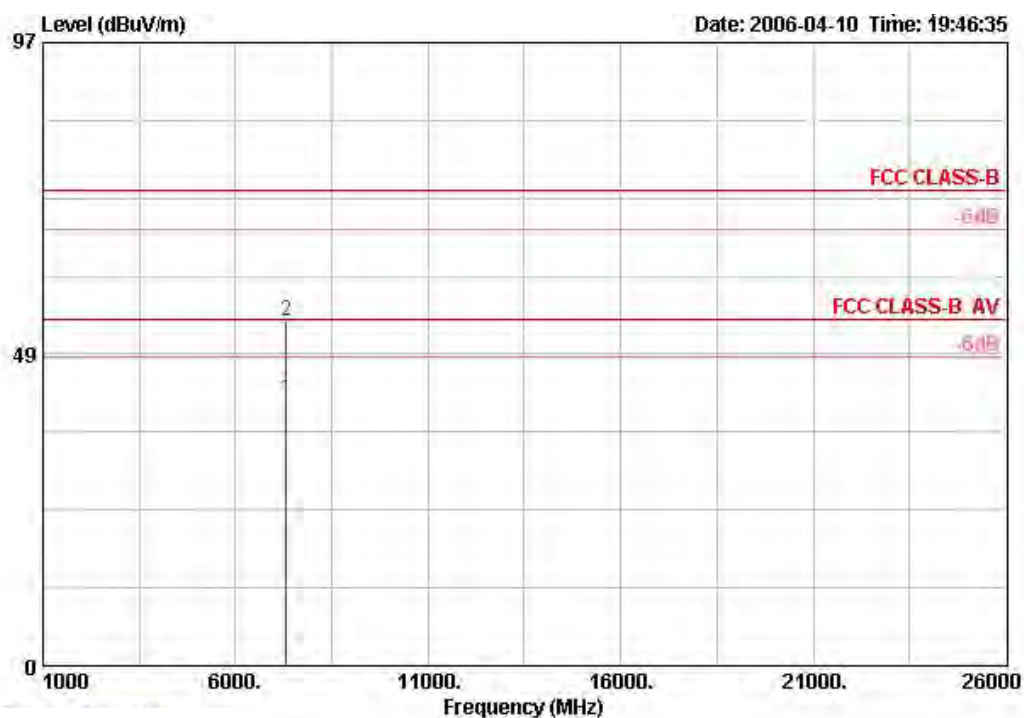

	Freq	Level	Over Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1 @	7311.000	41.46	-12.54	54.00	36.24	5.39	35.32	35.14 AVERAGE	141	281
2 @	7311.000	53.67	-20.33	74.00	36.24	5.39	35.32	47.35 PEAK	141	281


Horizontal

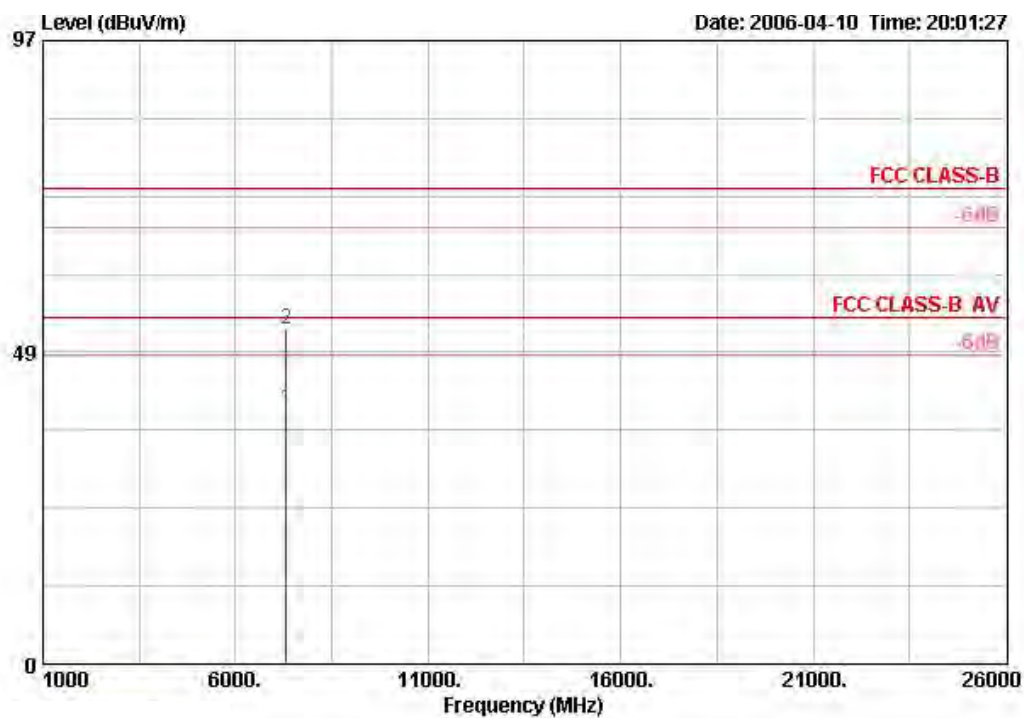

	Freq	Level	Over Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	7310.600	39.62	-14.38	54.00	36.24	5.39	35.32	33.30	AVERAGE	153	290
2 @	7310.600	51.97	-22.03	74.00	36.24	5.39	35.32	45.66	PEAK	153	290


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11g Channel 11 / Ant. 1

Vertical

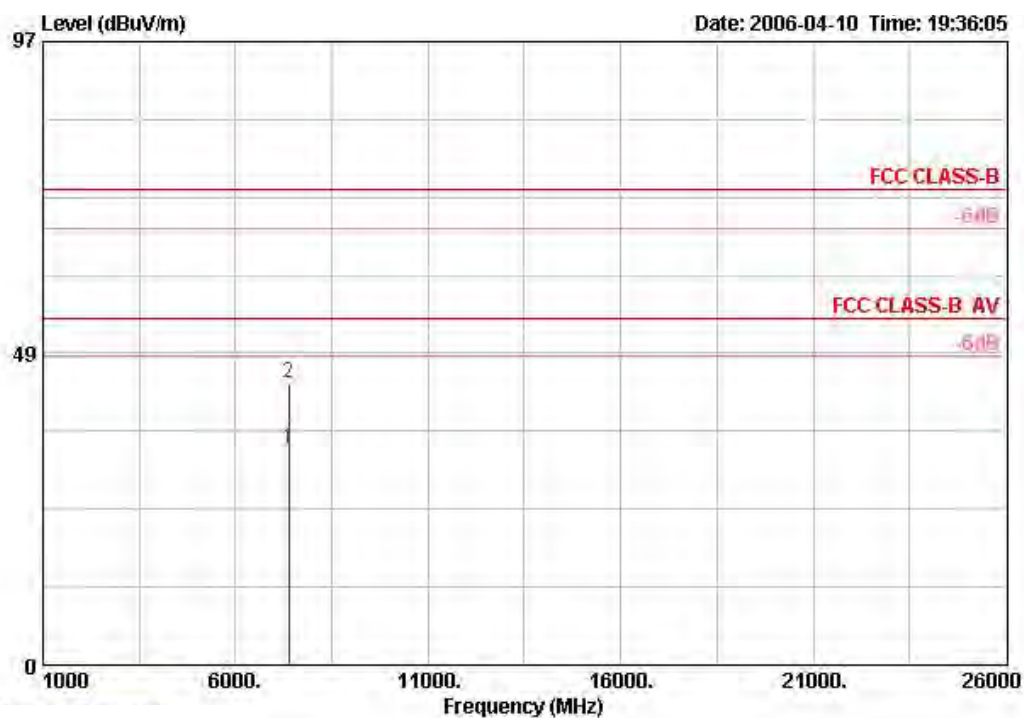

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	7386.200	33.51	-20.49	54.00	33.45	4.73	35.10	30.44	AVERAGE	131	307
2 @	7386.200	43.78	-30.22	74.00	33.45	4.73	35.10	40.71	PEAK	131	308


Horizontal

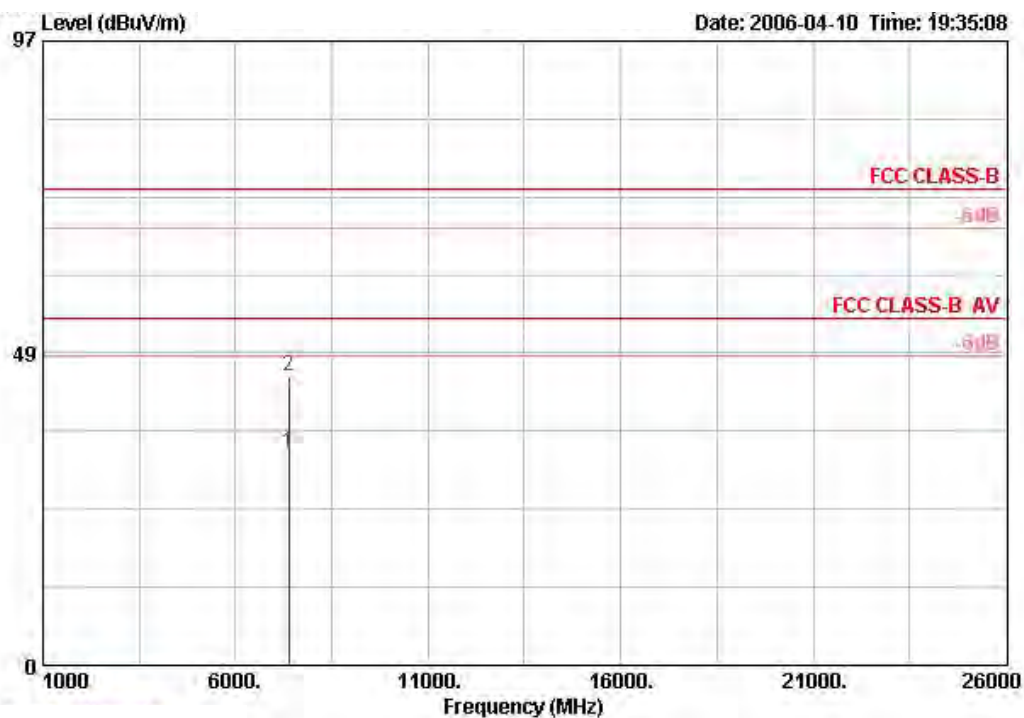

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	7386.100	33.14	-20.86	54.00	33.45	4.73	35.10	30.06	AVERAGE	108	359
2 @	7386.100	44.82	-29.18	74.00	33.45	4.73	35.10	41.75	PEAK	108	359

Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Channel 149 / Ant. 1


Vertical

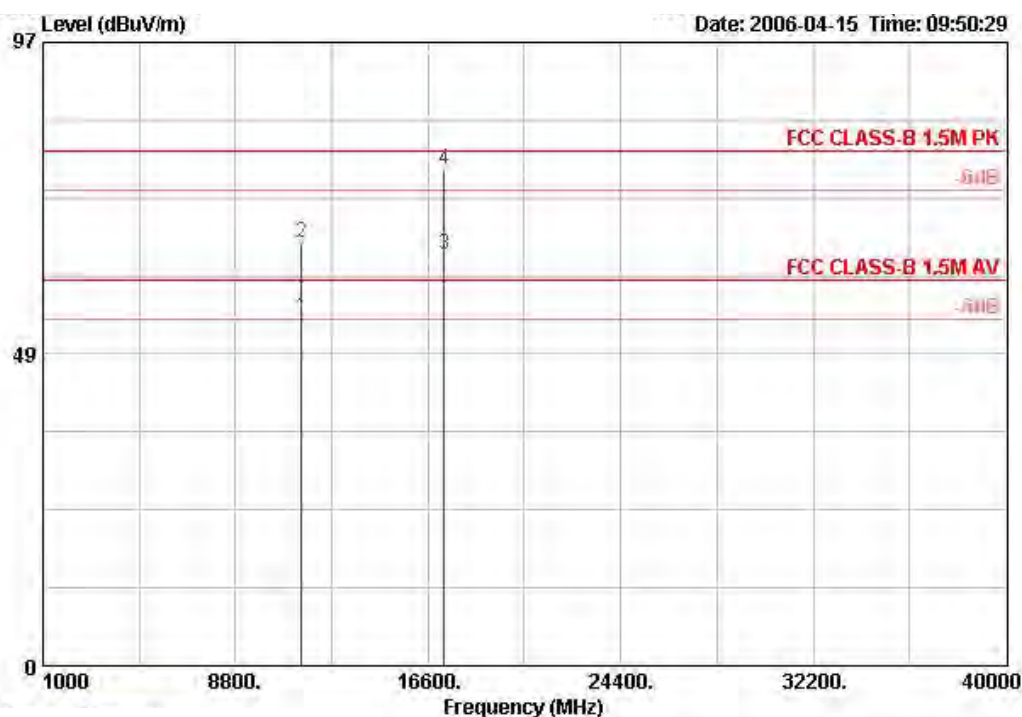

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	11489.360	54.19	-5.81	60.00	39.20	6.96	35.10	43.13	AVERAGE	117	234
2 @	11489.360	65.77	-14.23	80.00	39.20	6.96	35.10	54.71	PEAK	117	234
3 @	17233.760	64.07			40.93	18.15	35.00	40.00	AVERAGE	100	237
4 @	17236.560	77.30	-2.70	80.00	40.93	18.15	35.00	53.22	PEAK	100	237

Note: Item 3 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.


Horizontal

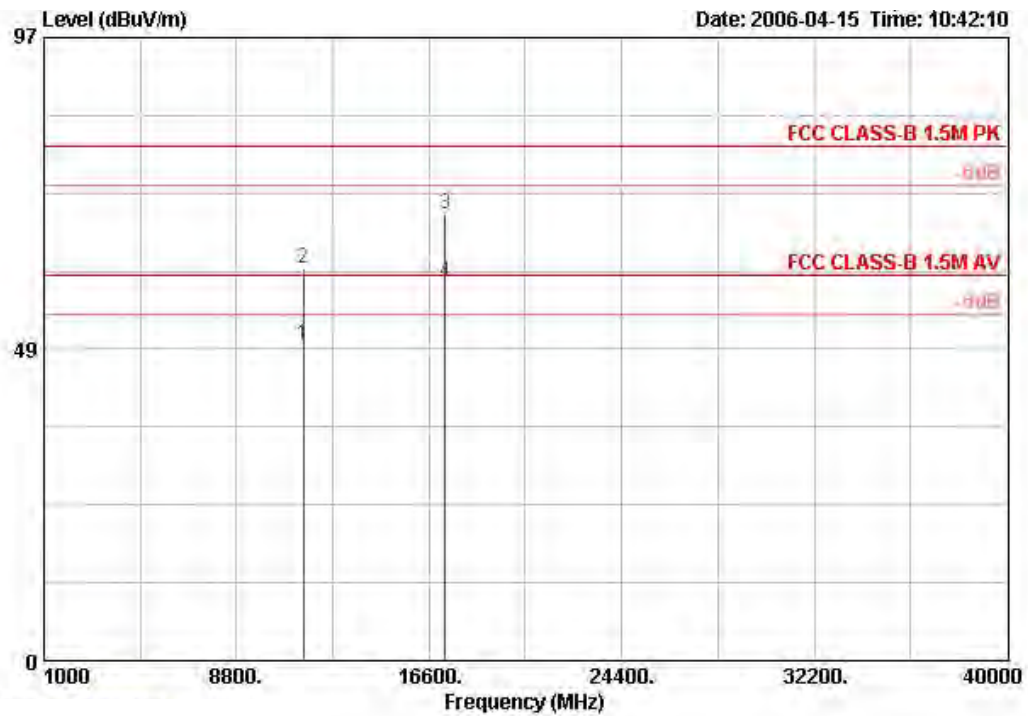

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	11489.920	49.17	-10.83	60.00	39.20	6.96	35.10	38.11	AVERAGE	115	252
2 @	11489.920	61.10	-18.90	80.00	39.20	6.96	35.10	50.04	PEAK	115	252
3 @	17234.120	69.52	-10.48	80.00	40.93	18.15	35.00	45.44	PEAK	107	243
4 @	17234.120	59.03	-0.97	60.00	40.93	18.15	35.00	34.95	AVERAGE	107	243

Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Channel 157 / Ant. 1


Vertical

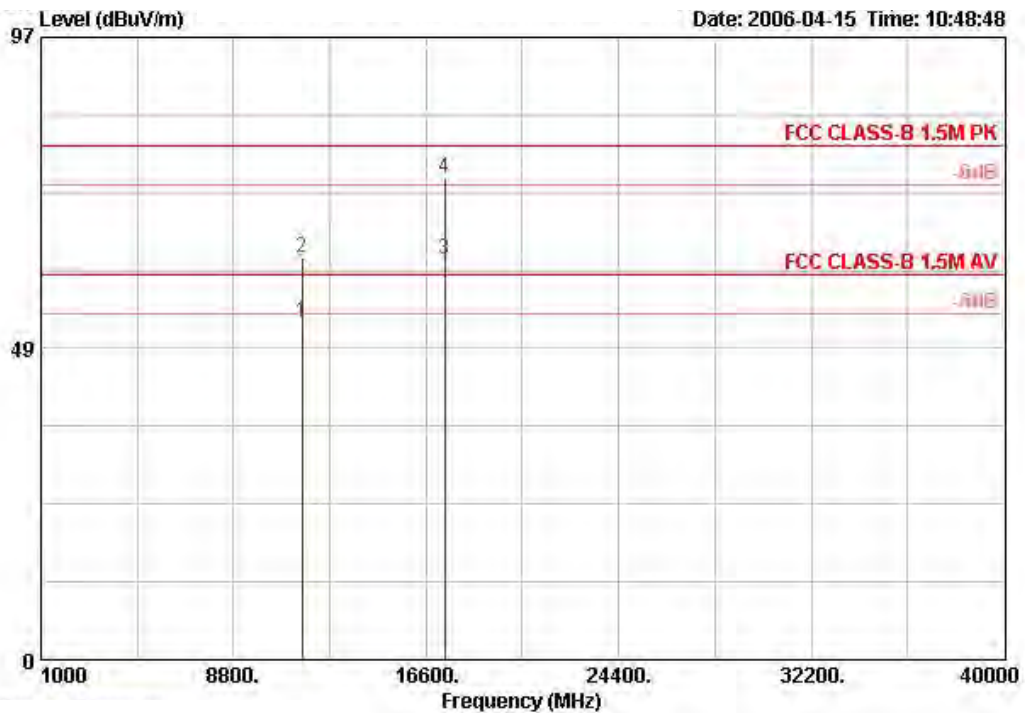

	Freq	Level	Over	Limit	Antenna	Cable	Preamp	Read		Ant	Table
	MHz	dBuV/m	Limit	Line	Factor	Loss	Factor	Level	Remark	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	11570.000	52.48	-7.52	60.00	39.21	7.06	35.13	41.34	AVERAGE	115	230
2 @	11570.000	62.52	-17.48	80.00	39.21	7.06	35.13	51.39	PEAK	115	230
3 @	17352.760	62.49			41.44	17.41	35.04	38.68	AVERAGE	100	231
4 @	17352.760	74.95	-5.05	80.00	41.44	17.41	35.04	51.14	PEAK	100	231

Note: Item 3 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

Horizontal

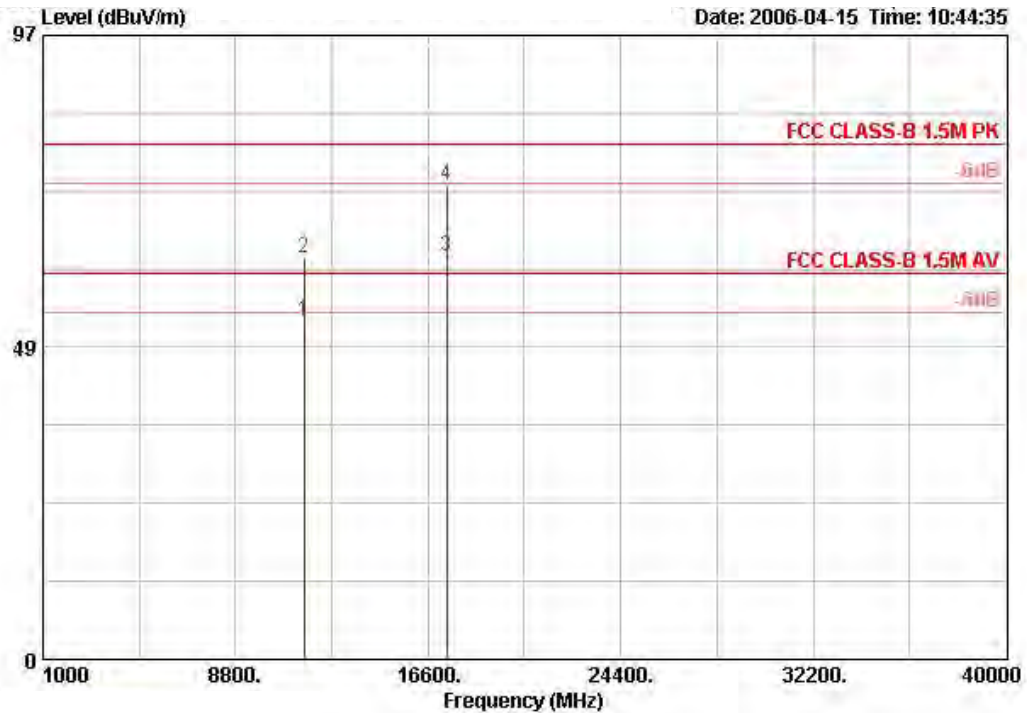


	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	11569.760	52.53	-7.47	60.00	39.21	7.06	35.13	41.39	AVERAGE	114	253
2 @	11569.760	62.43	-17.57	80.00	39.21	7.06	35.13	51.29	PEAK	114	253
3 @	17352.520	62.75			41.44	17.41	35.04	38.94	AVERAGE	117	235
4 @	17352.520	73.67	-6.33	80.00	41.44	17.41	35.04	49.86	PEAK	117	235

Note: Item 3 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Channel 165 / Ant. 1


Vertical

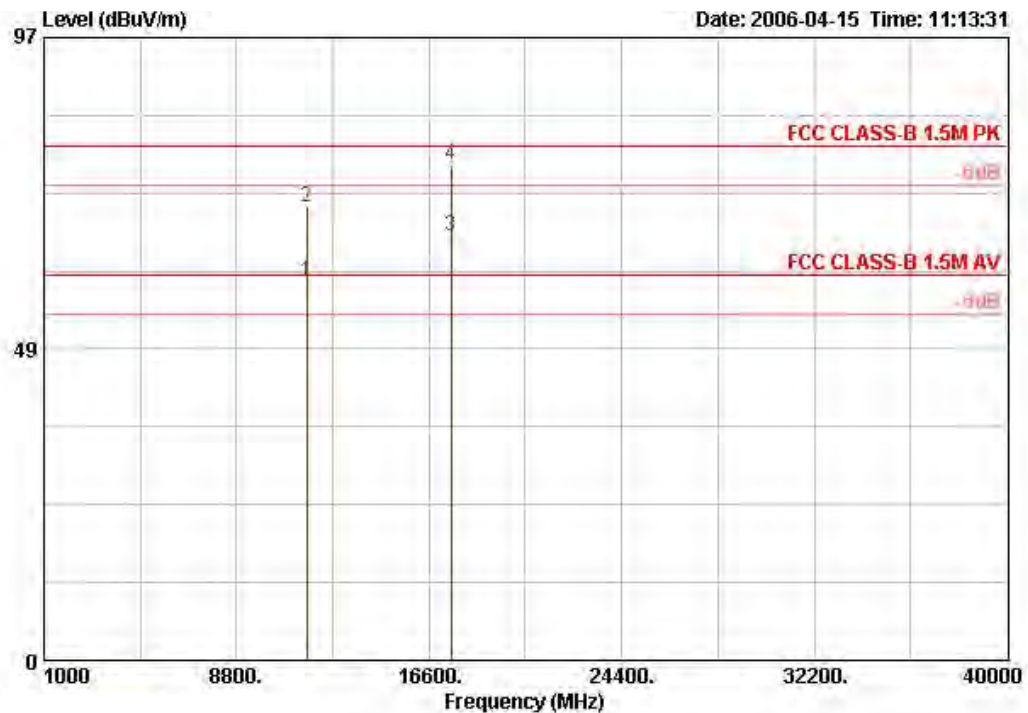

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	11652.320	58.90	-1.10	60.00	39.23	7.15	35.16	47.68	AVERAGE	115	246
2 @	11652.320	70.47	-9.53	80.00	39.23	7.15	35.16	59.25	PEAK	115	246
3 @	17474.480	66.21			41.95	16.66	35.09	42.68	AVERAGE	100	229
4 @	17474.480	77.10	-2.90	80.00	41.95	16.66	35.09	53.58	PEAK	100	229

Note: Item 3 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

Horizontal

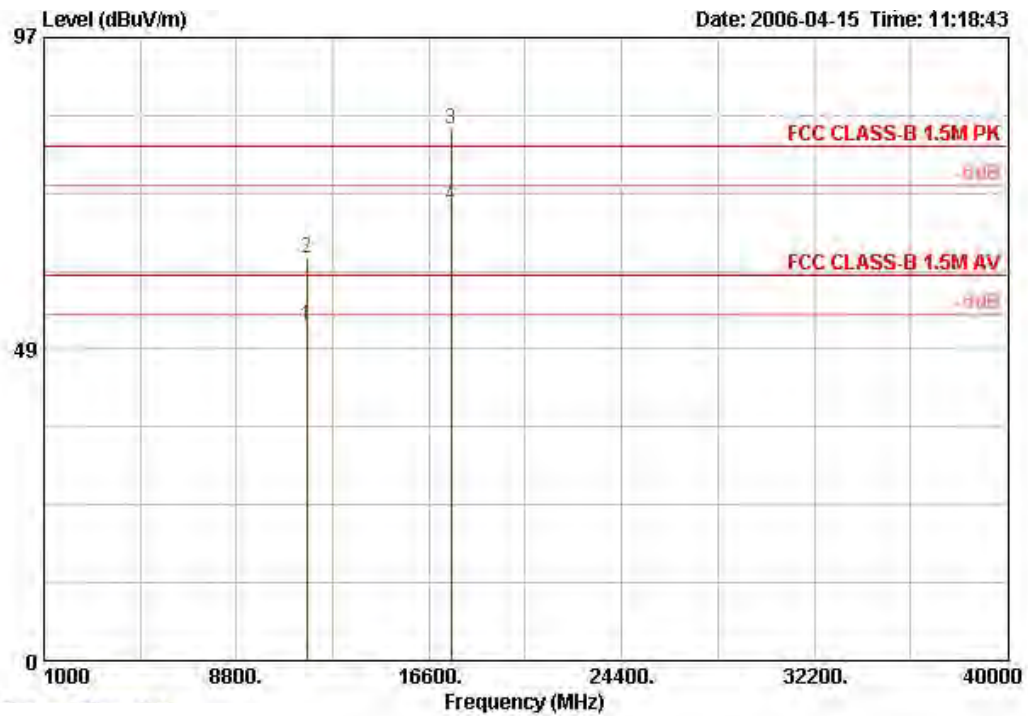


	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	11650.960	52.06	-7.94	60.00	39.23	7.15	35.16	40.84	AVERAGE	116	252
2 @	11650.960	62.74	-17.26	80.00	39.23	7.15	35.16	51.52	PEAK	116	252
3 @	17474.520	82.82			41.95	16.66	35.09	59.30	PEAK	119	243
4 @	17474.520	70.89			41.95	16.66	35.09	47.36	AVERAGE	119	243

Note: Item 3, 4 are on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Turbo Channel 152 / Ant. 1

Vertical

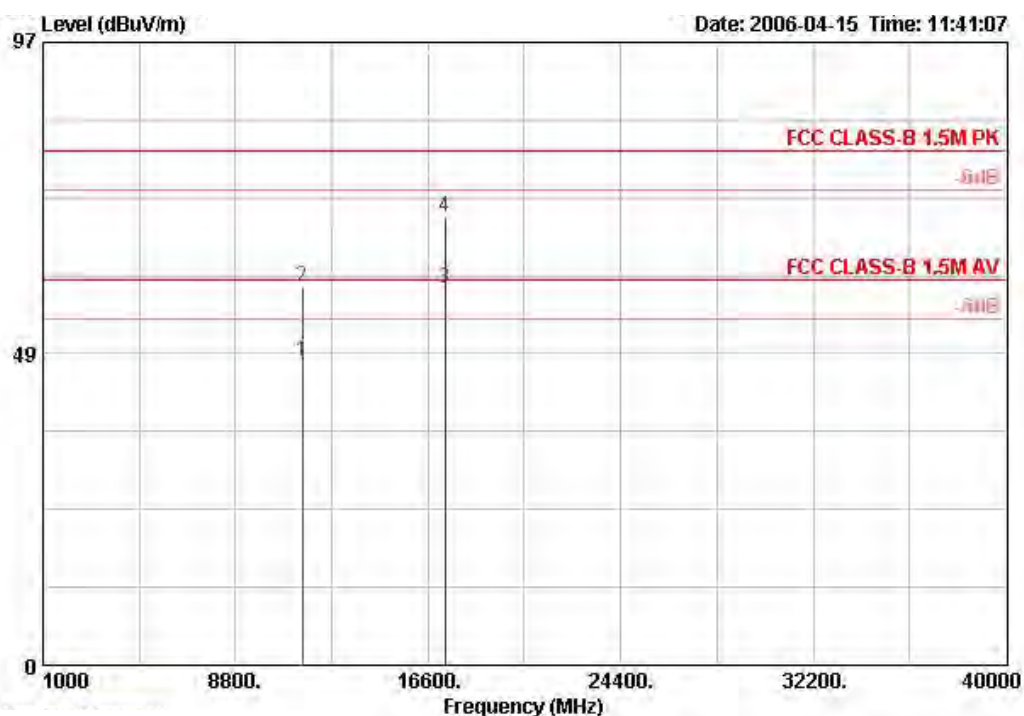

	Freq	Level	Over Limit	Antenna Line	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1 @	11522.520	47.34	-12.66	60.00	39.20	7.01	35.11	36.24 AVERAGE	115	230
2 @	11522.520	59.03	-20.97	80.00	39.20	7.01	35.11	47.93 PEAK	115	230
3 @	17280.160	58.80	-1.20	60.00	41.15	17.90	35.01	34.76 AVERAGE	100	228
4 @	17280.160	69.85	-10.15	80.00	41.15	17.90	35.01	45.81 PEAK	100	228

Horizontal

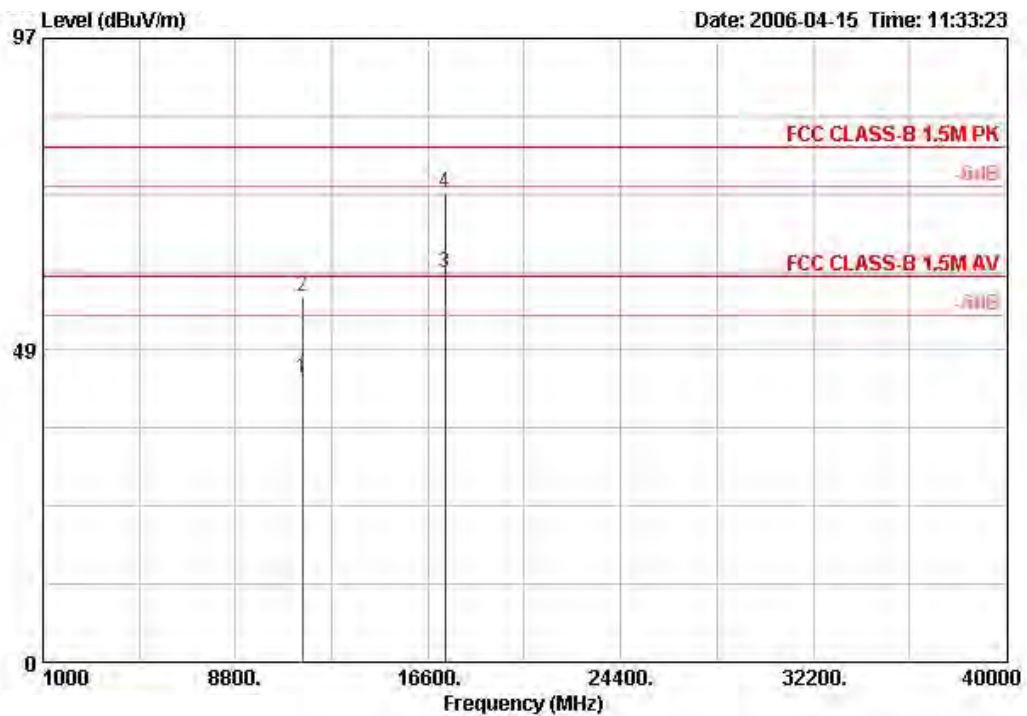


	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	11522.640	44.08	-15.92	60.00	39.20	7.01	35.11	32.98	AVERAGE	118	252
2 @	11522.640	56.84	-23.16	80.00	39.20	7.01	35.11	45.74	PEAK	118	252
3 @	17280.160	60.51			41.15	17.90	35.01	36.47	AVERAGE	118	247
4 @	17280.160	72.84	-7.16	80.00	41.15	17.90	35.01	48.80	PEAK	118	247

Note: Item 3 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Turbo Channel 160 / Ant. 1

Vertical

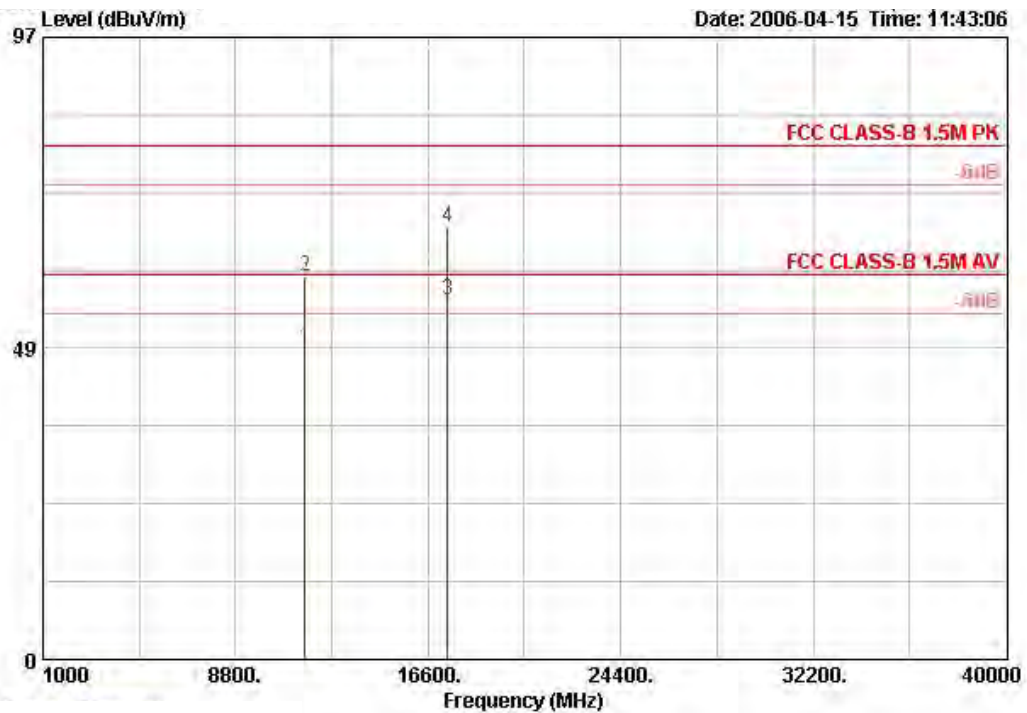

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	11596.480	48.68	-11.32	60.00	39.22	7.10	35.14	37.50	AVERAGE	106	246
2 @	11596.480	59.64	-20.36	80.00	39.22	7.10	35.14	48.46	PEAK	106	246
3 @	17401.720	56.11	-3.89	60.00	41.66	16.91	35.06	32.60	AVERAGE	100	231
4 @	17401.720	67.29	-12.71	80.00	41.66	16.91	35.06	43.78	PEAK	100	231

Horizontal

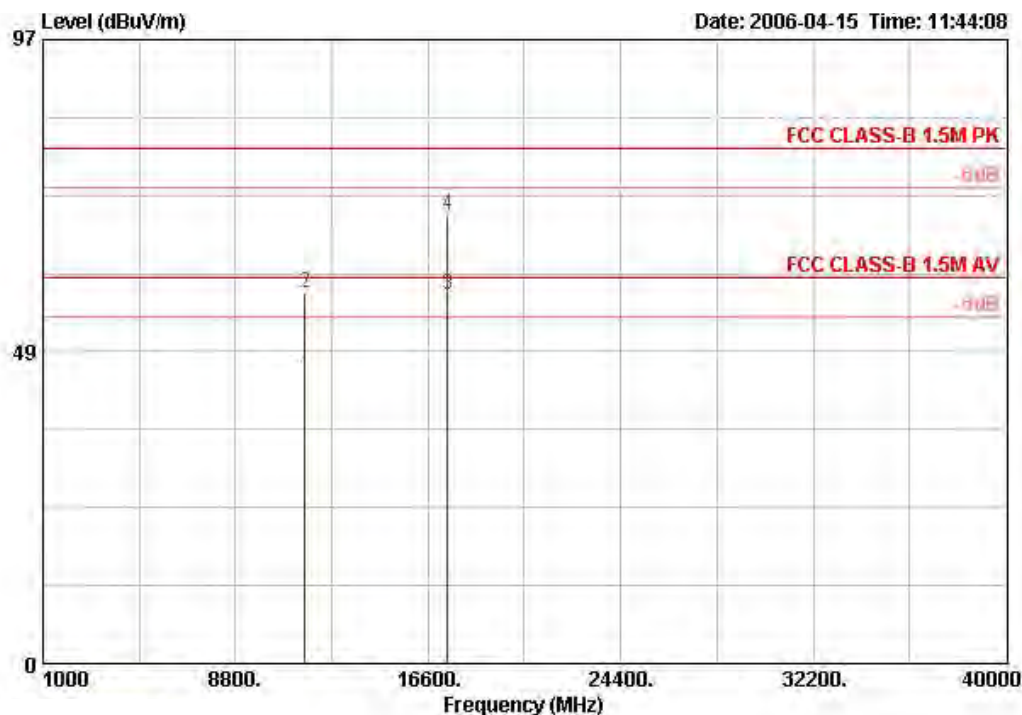

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 @	11600.920	44.32	-15.68	60.00	39.22	7.10	35.14	33.14	AVERAGE	119	244
2 @	11600.920	57.50	-22.50	80.00	39.22	7.10	35.14	46.32	PEAK	119	244
3 @	17396.240	57.30	-2.70	60.00	41.59	17.16	35.06	33.61	AVERAGE	117	235
4 @	17396.240	69.79	-10.21	80.00	41.59	17.16	35.06	46.11	PEAK	117	235

Note:


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11b Channel 1 / Ant. 2

Vertical

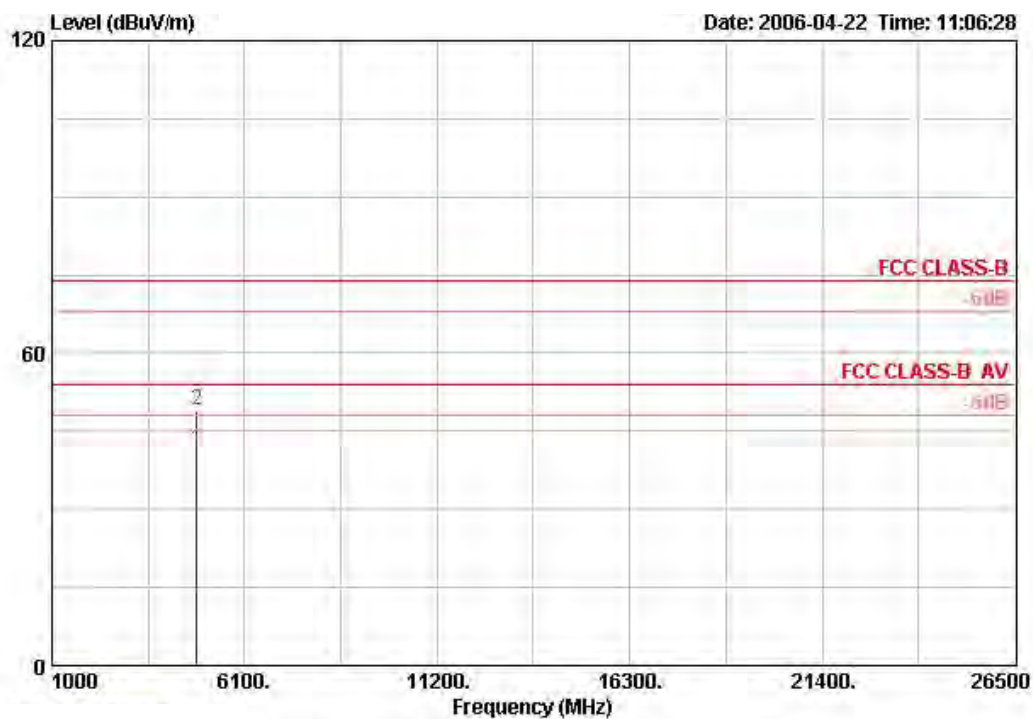

	Freq	Level	Over Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1	4824.010	41.37	-12.63	54.00	33.22	4.68	35.10	38.57 AVERAGE	143	207
2	4824.014	49.16	-24.84	74.00	33.22	4.68	35.10	46.36 PEAK	143	207


Horizontal

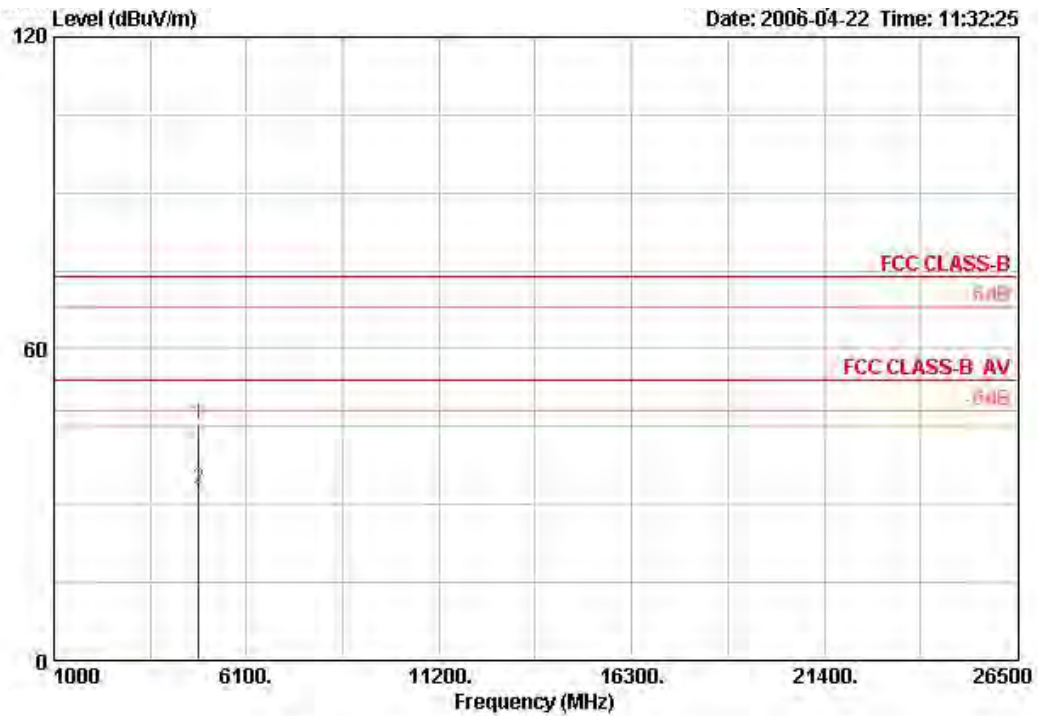

	Freq	Level	Over Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	4823.960	45.57	-28.43	74.00	33.22	4.68	35.10	42.77	PEAK	100	323
2	4824.028	33.07	-20.93	54.00	33.22	4.68	35.10	30.27	AVERAGE	100	323


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11b Channel 6 / Ant. 2

Vertical

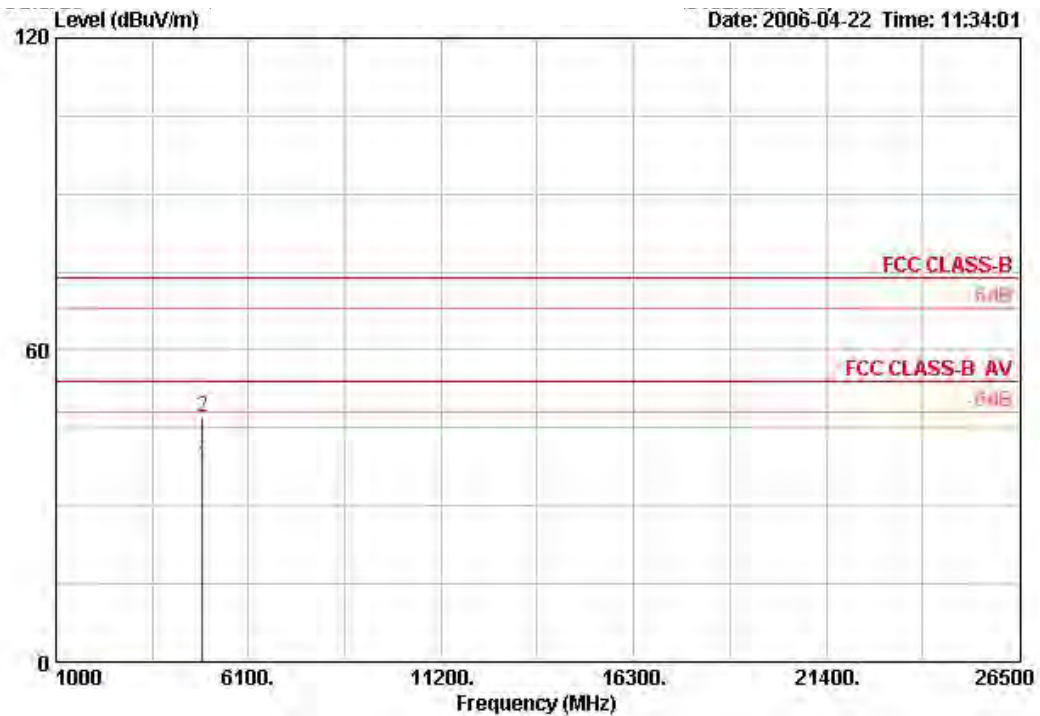

	Freq	Level	Over Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB	dB	dBuV		cm	deg
1	4873.960	37.47	-16.53	54.00	33.33	4.69	35.10	34.54 AVERAGE	100	323
2	4873.960	47.10	-26.90	74.00	33.33	4.69	35.10	44.17 PEAK	100	323


Horizontal

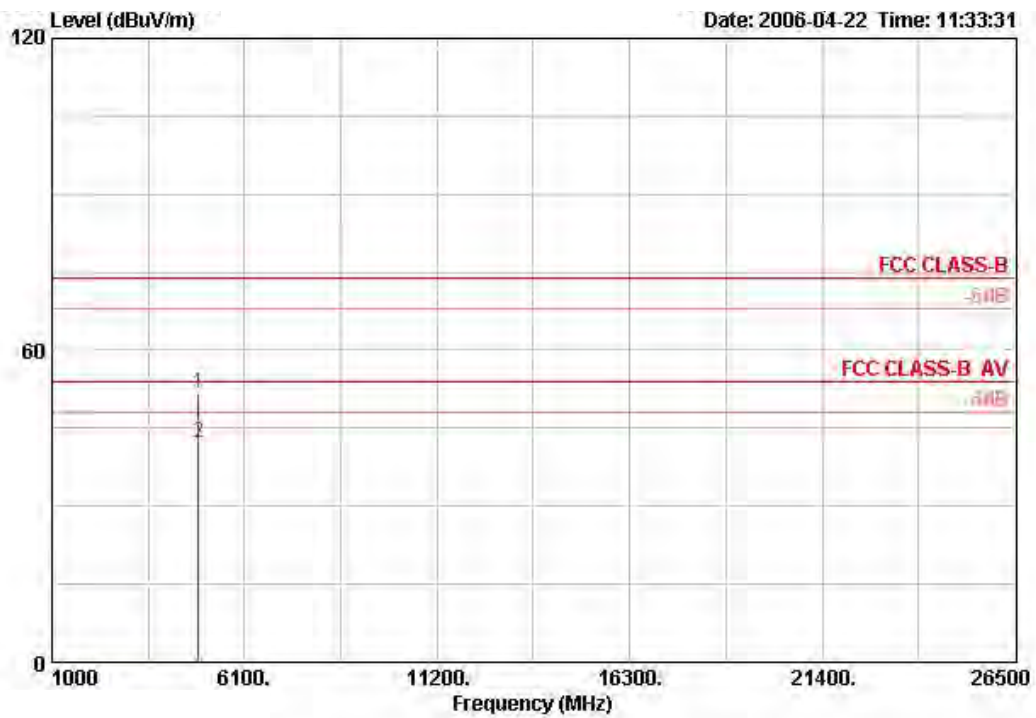

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBUV/m	dB	dBUV/m	dB/m	dB	dB	dBUV		cm	deg
1	4873.960	51.70	-22.30	74.00	33.33	4.69	35.10	48.77	PEAK	100	323
2	4873.960	42.29	-11.71	54.00	33.33	4.69	35.10	39.36	AVERAGE	100	323


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11b Channel 11 / Ant. 2

Vertical

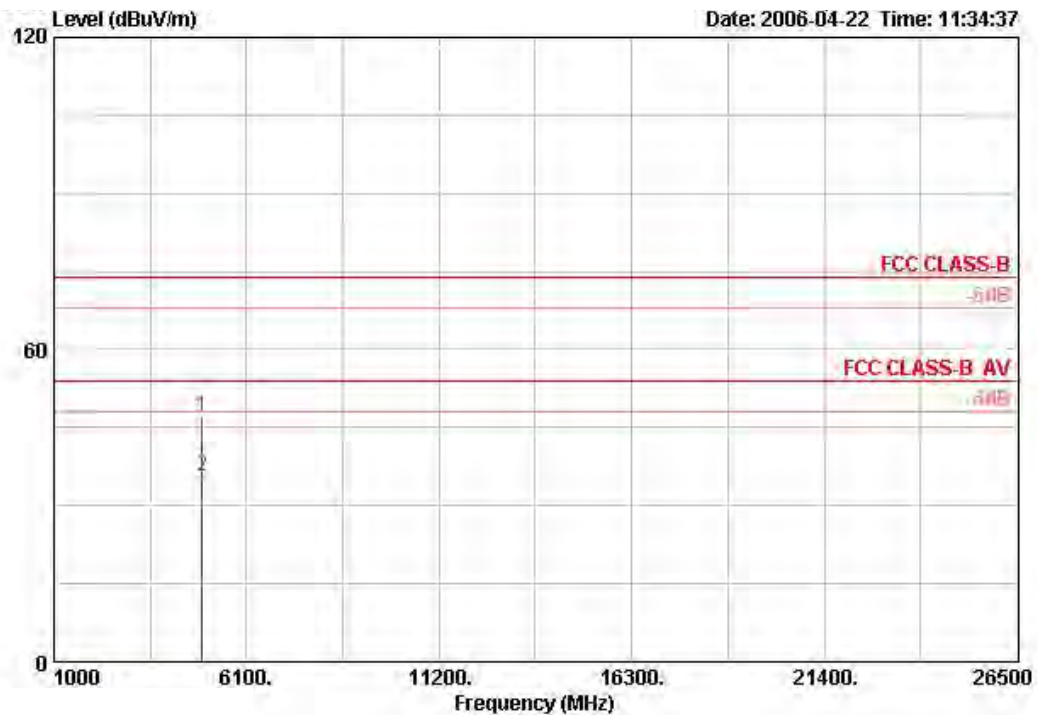

	Freq	Level	Over Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB		dB/m	dB	dB	dBuV		cm	deg
1	4924.808	46.94	-27.06	74.00	33.45	4.73	35.10	43.86	PEAK	100	323
2	4924.808	35.71	-18.29	54.00	33.45	4.73	35.10	32.64	AVERAGE	100	323


Horizontal

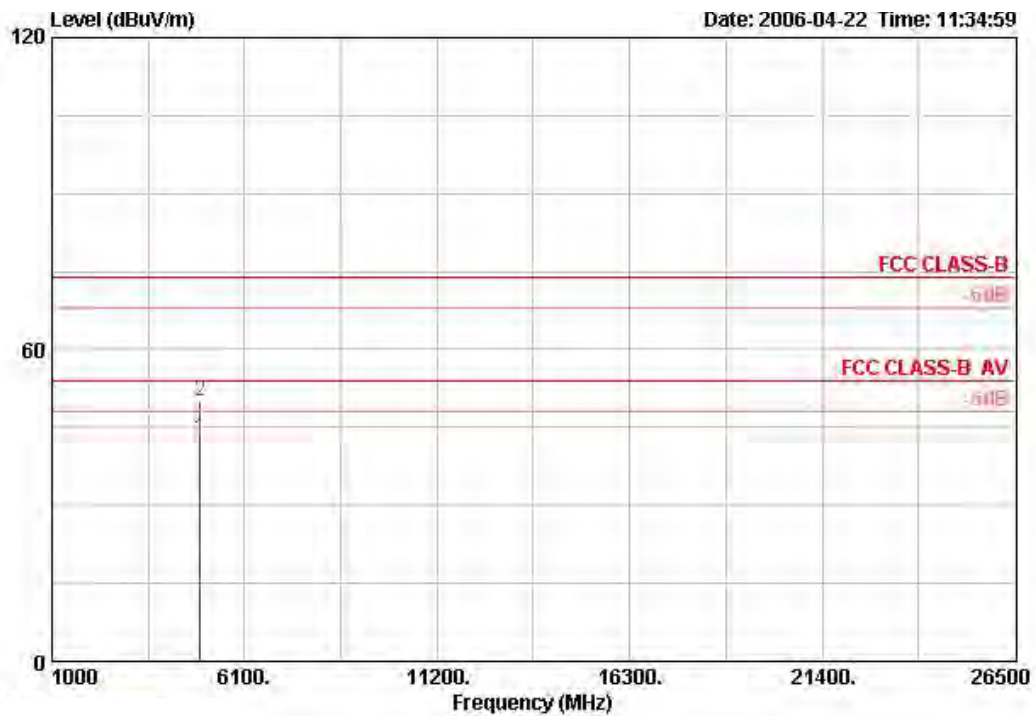

	Freq	Level	Over Limit	Antenna Line	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1	4924.808	42.73	-11.27	54.00	33.45	4.73	35.10	39.65 AVERAGE	100	323
2	4924.808	50.13	-23.87	74.00	33.45	4.73	35.10	47.05 PEAK	100	323


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11g Channel 1 / Ant. 2

Vertical

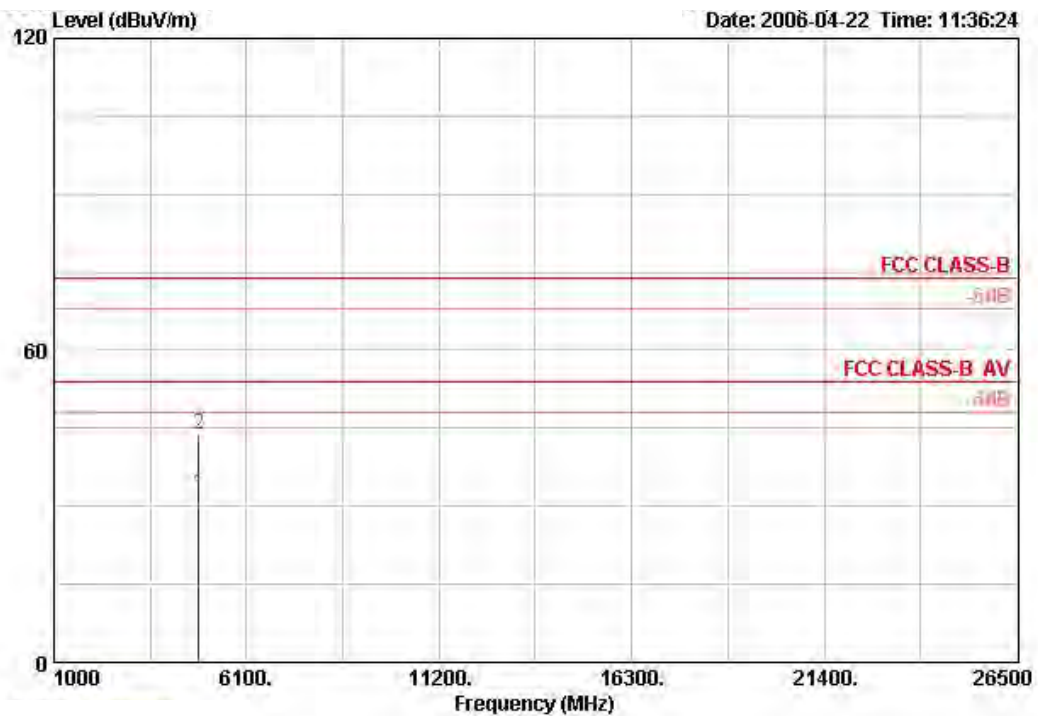

	Freq	Level	Over Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1	4823.380	32.42	-21.58	54.00	33.22	4.68	35.10	29.63 AVERAGE	100	323
2	4823.380	43.84	-30.16	74.00	33.22	4.68	35.10	41.05 PEAK	100	323


Horizontal

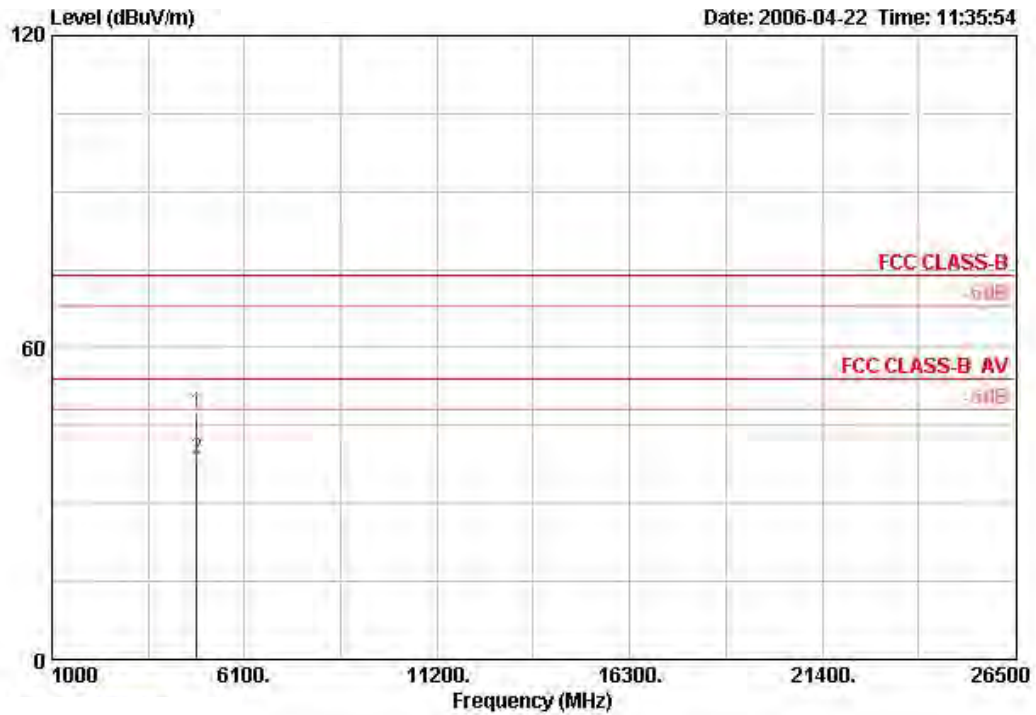

	Freq	Level	Over Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	4823.380	47.52	-26.48	74.00	33.22	4.68	35.10	44.72	PEAK	100	323
2	4823.380	38.71	-15.29	54.00	33.22	4.68	35.10	35.91	AVERAGE	100	323


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11g Channel 6 / Ant. 2

Vertical

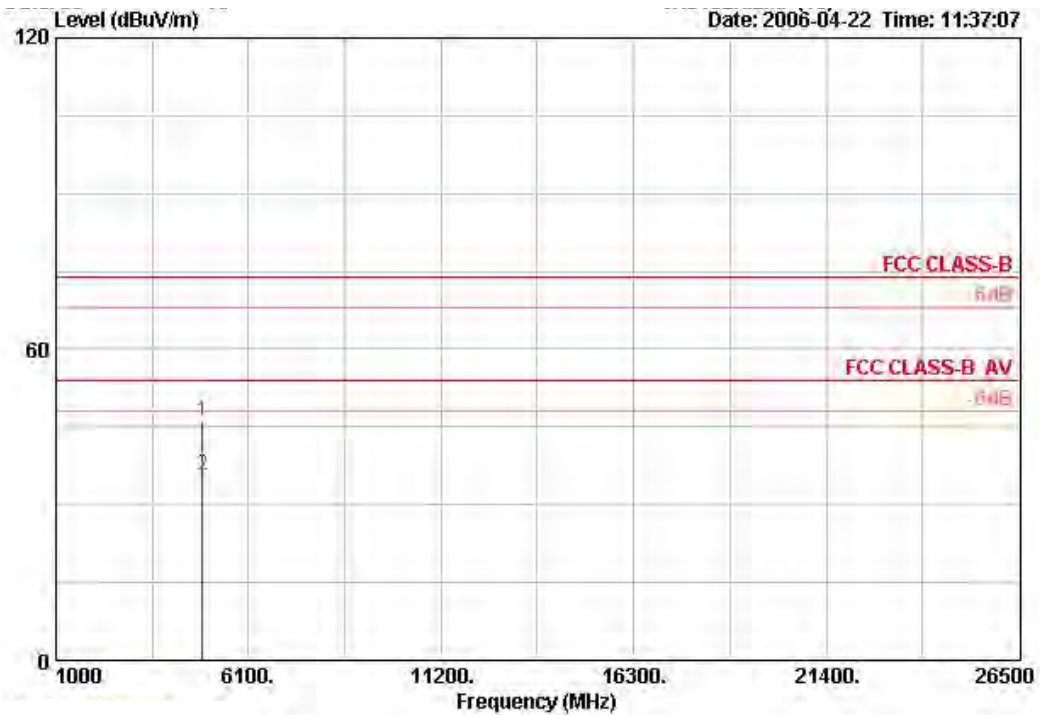

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	4873.924	46.13	-27.87	74.00	33.33	4.69	35.10	43.20	PEAK	100	323
2	4873.924	35.73	-18.27	54.00	33.33	4.69	35.10	32.80	AVERAGE	100	323


Horizontal

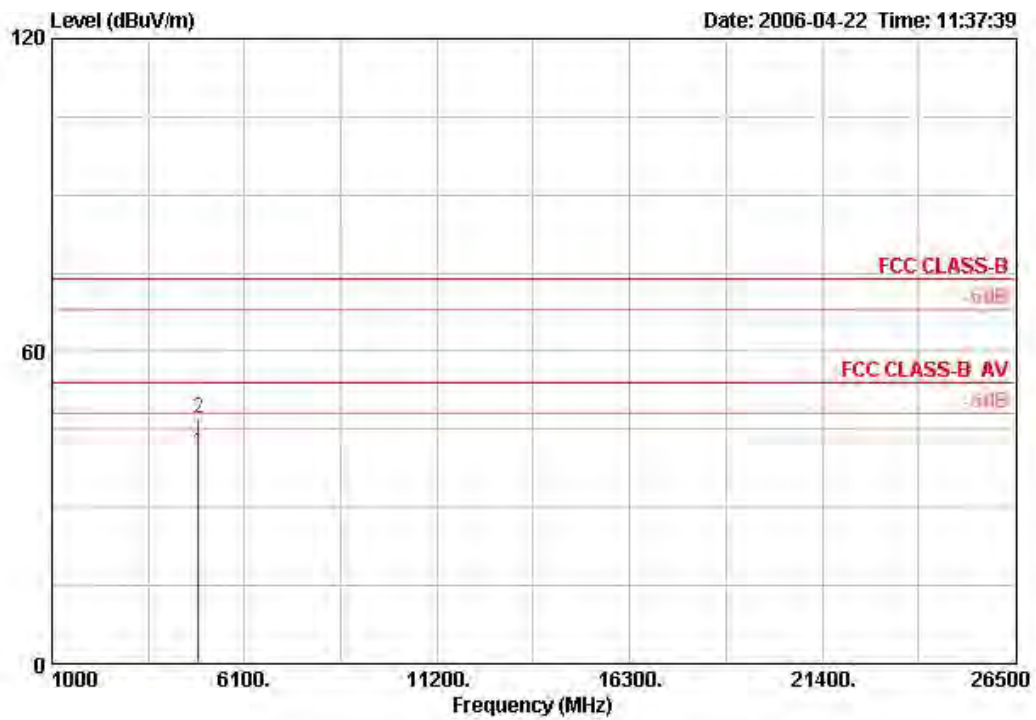

	Freq	Level	Over Limit	Antenna Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	4873.924	40.60	-13.40	54.00	33.33	4.69	35.10	37.67	AVERAGE	100	323
2	4873.924	46.96	-27.04	74.00	33.33	4.69	35.10	44.04	PEAK	100	323


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11g Channel 11 / Ant. 2

Vertical

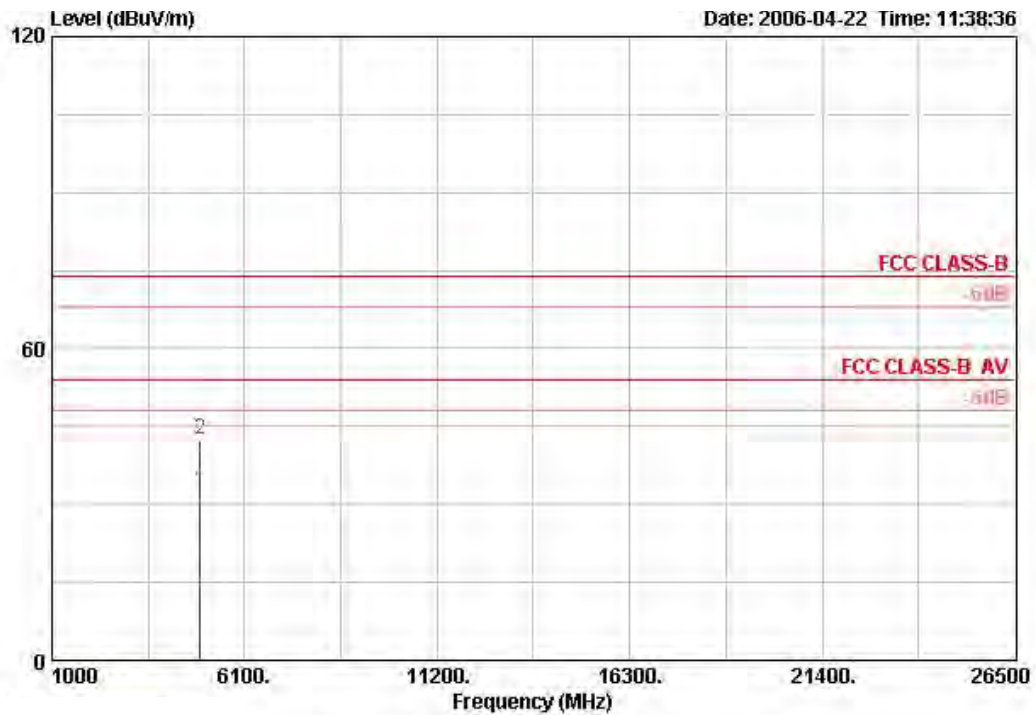

	Freq	Level	Over Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB	dB	dBuV		cm	deg
1	4924.104	32.74	-21.26	54.00	33.45	4.73	35.10	29.67 AVERAGE	100	323
2	4924.104	42.52	-31.48	74.00	33.45	4.73	35.10	39.45 PEAK	100	323


Horizontal

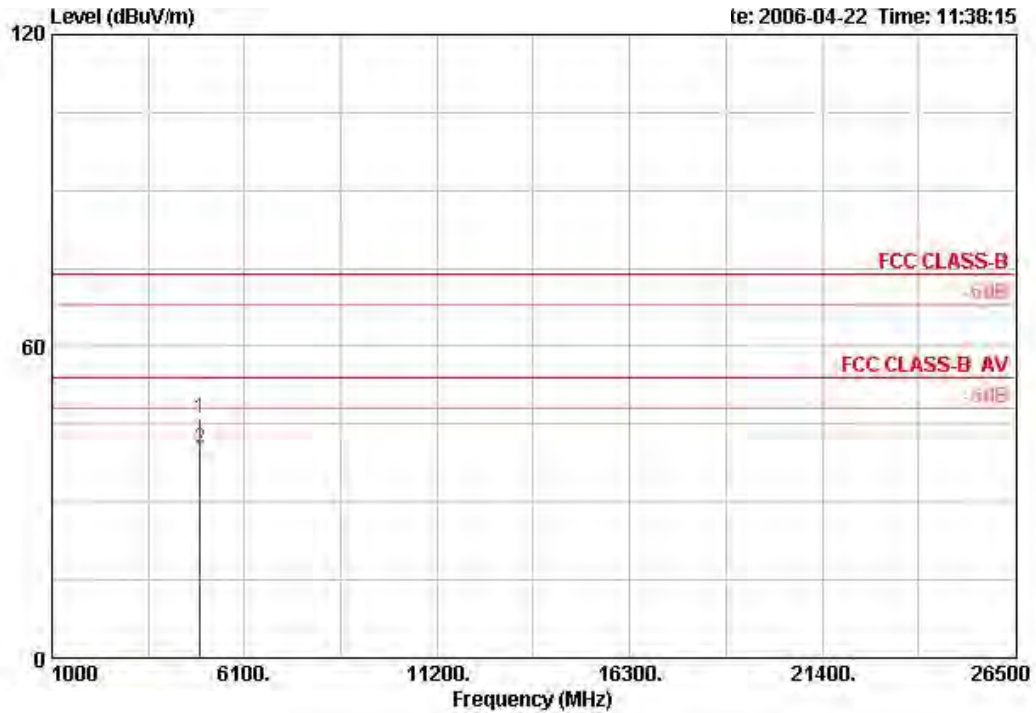

	Freq	Level	Over Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dB/m	dB	dB	dBuV		cm	deg
1	4924.104	46.11	-27.89	74.00	4.73	35.10	43.04	PEAK	100	323
2	4924.104	40.31	-13.69	54.00	4.73	35.10	37.23	AVERAGE	100	323


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Channel 149 / Ant. 2

Vertical

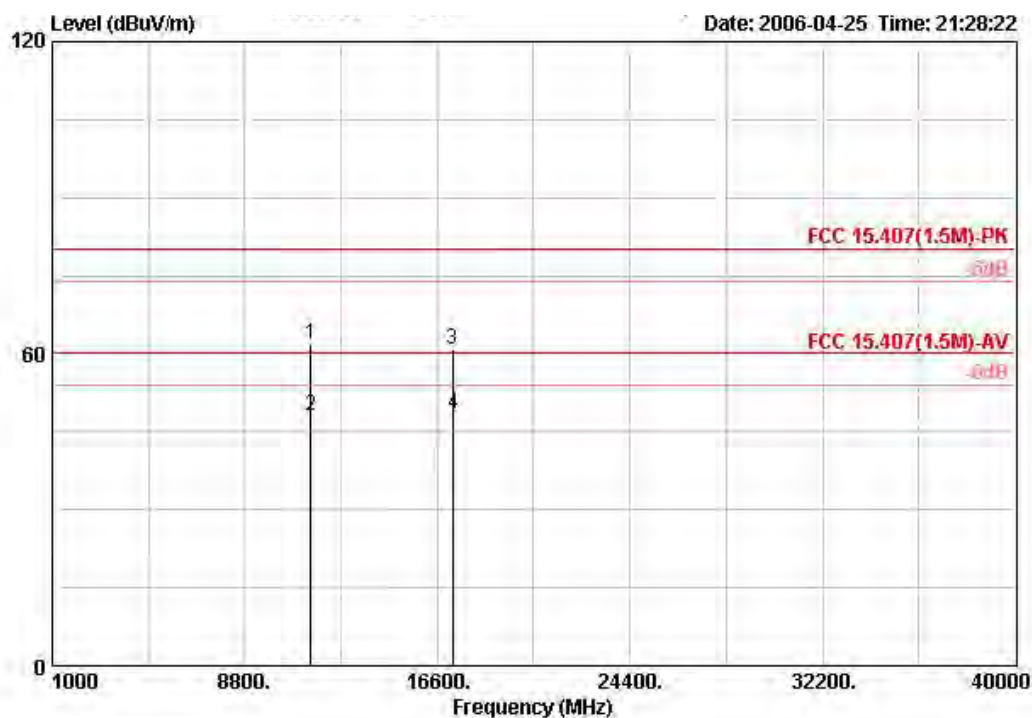

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp			
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pol/Phase
			dB	dBuV/m	dBuV	dB/m	dB	dB		Distance
										m
1	11483.800	61.65	-18.35	80.00	50.28	38.69	7.66	34.98	PEAK	VERTICAL
2	11487.320	48.19	-11.81	60.00	36.83	38.69	7.66	34.98	AVERAGE	VERTICAL
3	17229.400	60.84	-19.16	80.00	44.41	42.47	8.87	34.91	PEAK	VERTICAL
4	17236.520	48.52	-11.48	60.00	32.11	42.47	8.87	34.92	AVERAGE	VERTICAL


Horizontal

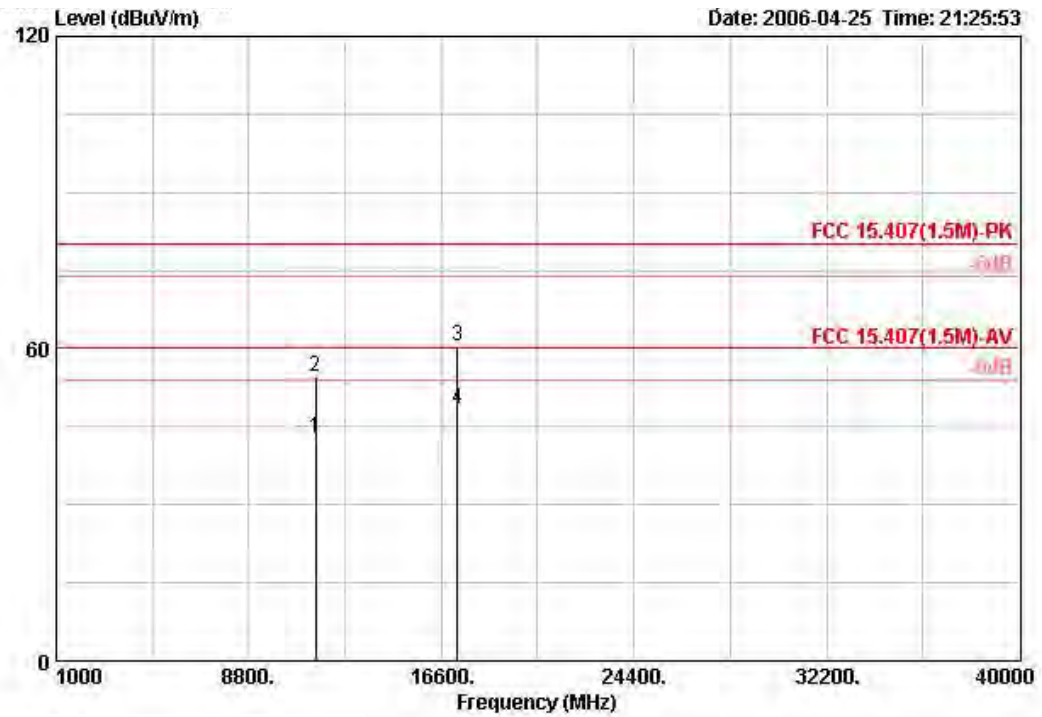

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1	11489.640	42.67	-17.33	60.00	31.31	38.69	7.66	34.98	AVERAGE	HORIZONTAL	3
2	11491.640	54.55	-25.45	80.00	43.19	38.69	7.65	34.98	PEAK	HORIZONTAL	3
3	17233.520	60.40	-19.60	80.00	43.98	42.47	8.87	34.92	PEAK	HORIZONTAL	3
4	17240.880	48.29	-11.71	60.00	31.88	42.47	8.87	34.92	AVERAGE	HORIZONTAL	3


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Channel 157 / Ant. 2

Vertical

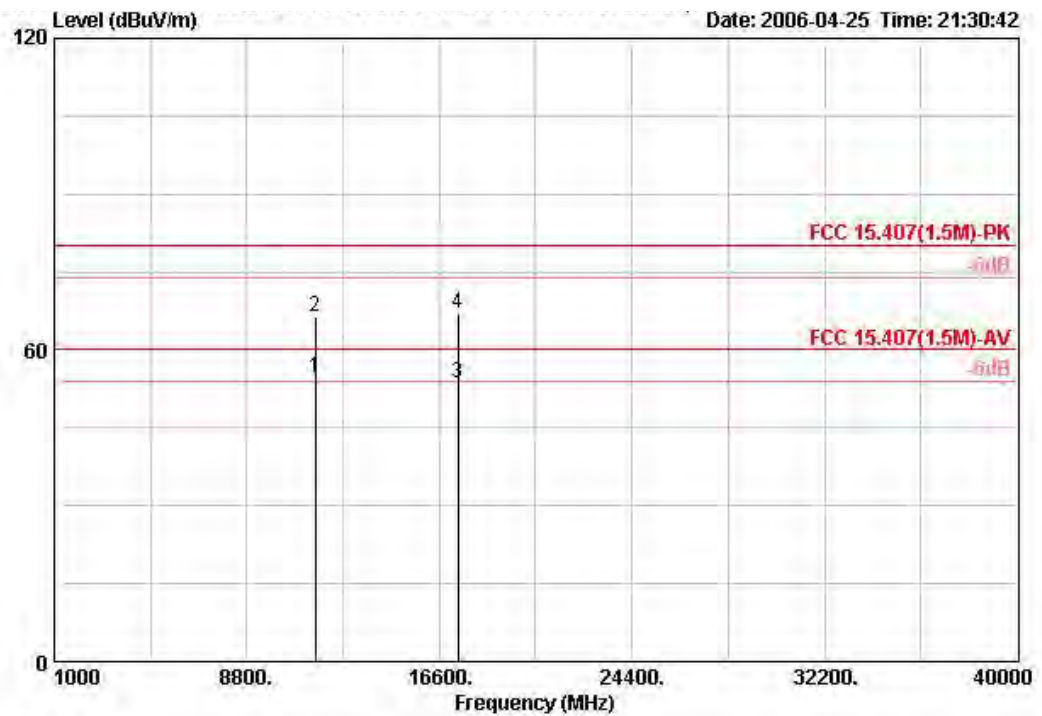

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1 !	11570.640	54.62	-5.38	60.00	43.14	38.81	7.67	35.00	AVERAGE	VERTICAL	3
2	11570.840	66.40	-13.60	80.00	54.92	38.81	7.67	35.00	PEAK	VERTICAL	3
3	17358.760	53.75	-6.25	60.00	36.81	43.05	8.86	34.97	AVERAGE	VERTICAL	3
4	17360.240	66.93	-13.07	80.00	49.98	43.05	8.86	34.97	PEAK	VERTICAL	3


Horizontal

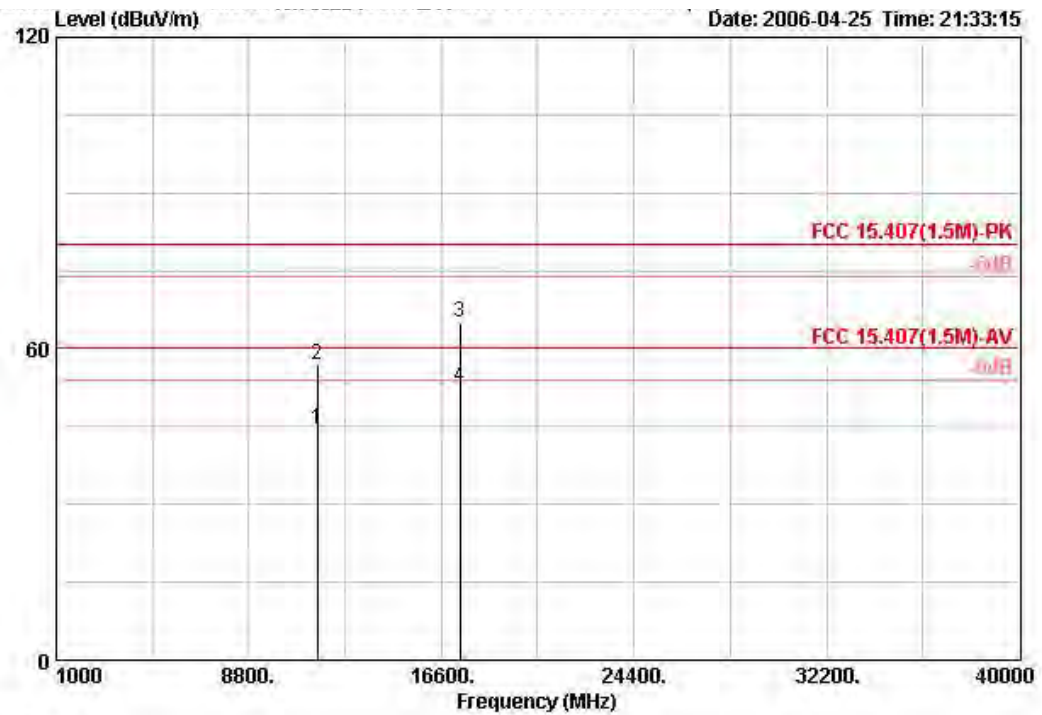

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1	11570.560	44.54	-15.46	60.00	33.06	38.81	7.67	35.00	AVERAGE	HORIZONTAL	3
2	11570.880	56.89	-23.11	80.00	45.41	38.81	7.67	35.00	PEAK	HORIZONTAL	3
3	17357.280	65.00	-15.00	80.00	48.04	43.05	8.86	34.96	PEAK	HORIZONTAL	3
4	17357.800	52.62	-7.38	60.00	35.67	43.05	8.86	34.96	AVERAGE	HORIZONTAL	3


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Channel 165 / Ant. 2

Vertical

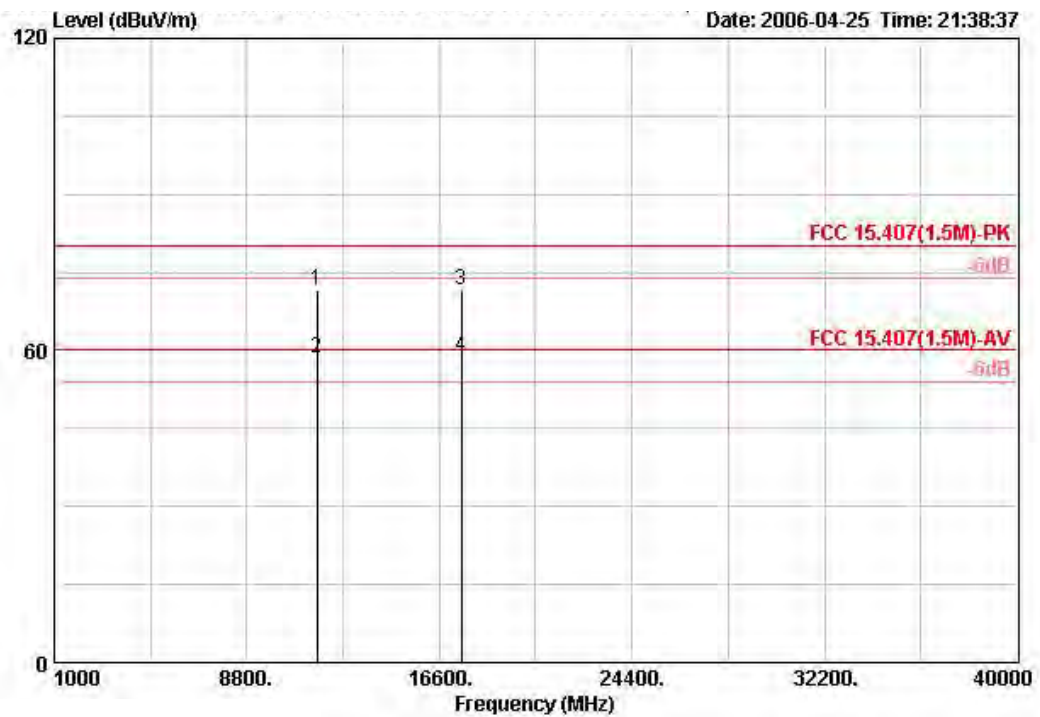

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1	11645.280	71.54	-8.46	80.00	59.94	38.92	7.69	35.01	PEAK	VERTICAL	3
2 !	11649.760	58.58	-1.42	60.00	46.98	38.92	7.69	35.01	AVERAGE	VERTICAL	3
3	17474.000	71.54	-8.46	80.00	54.05	43.63	8.85	35.00	PEAK	VERTICAL	3
4 !	17474.040	58.88	-1.12	60.00	41.40	43.63	8.85	35.00	AVERAGE	VERTICAL	3


Horizontal

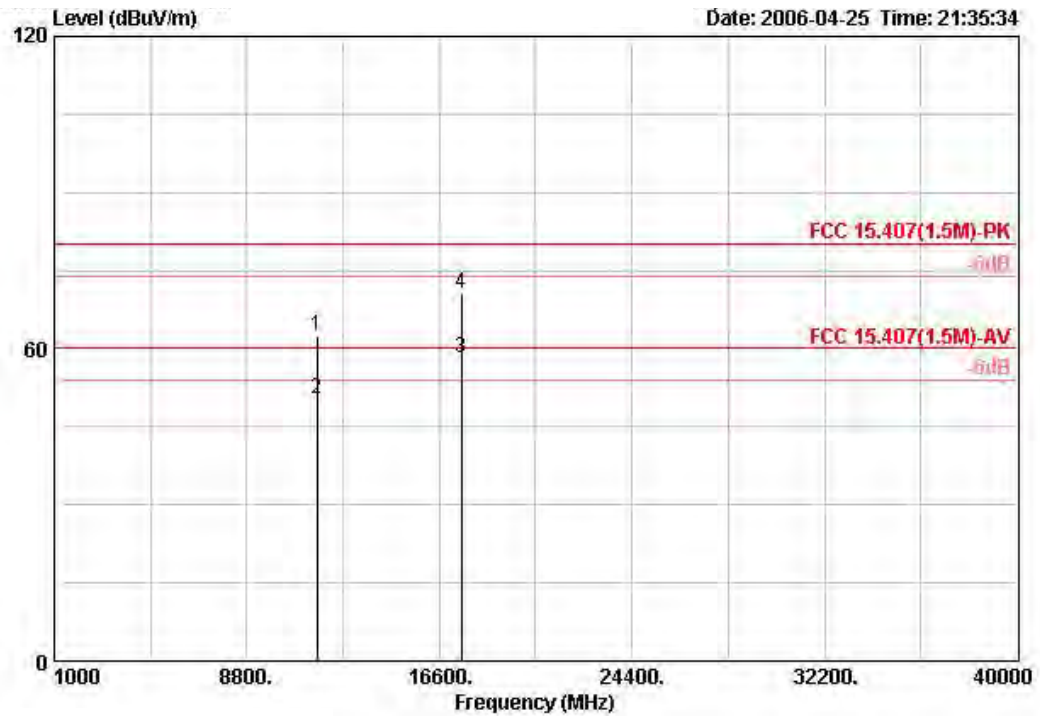

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1	11647.880	62.54	-17.46	80.00	50.95	38.92	7.69	35.01	PEAK	HORIZONTAL	3
2	11649.520	50.36	-9.64	60.00	38.76	38.92	7.69	35.01	AVERAGE	HORIZONTAL	3
3	17474.400	58.32	-1.68	60.00	40.83	43.63	8.85	35.00	AVERAGE	HORIZONTAL	3
4	17476.880	70.76	-9.24	80.00	53.27	43.63	8.85	35.00	PEAK	HORIZONTAL	3

Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Turbo Channel 152 / Ant. 2

Vertical

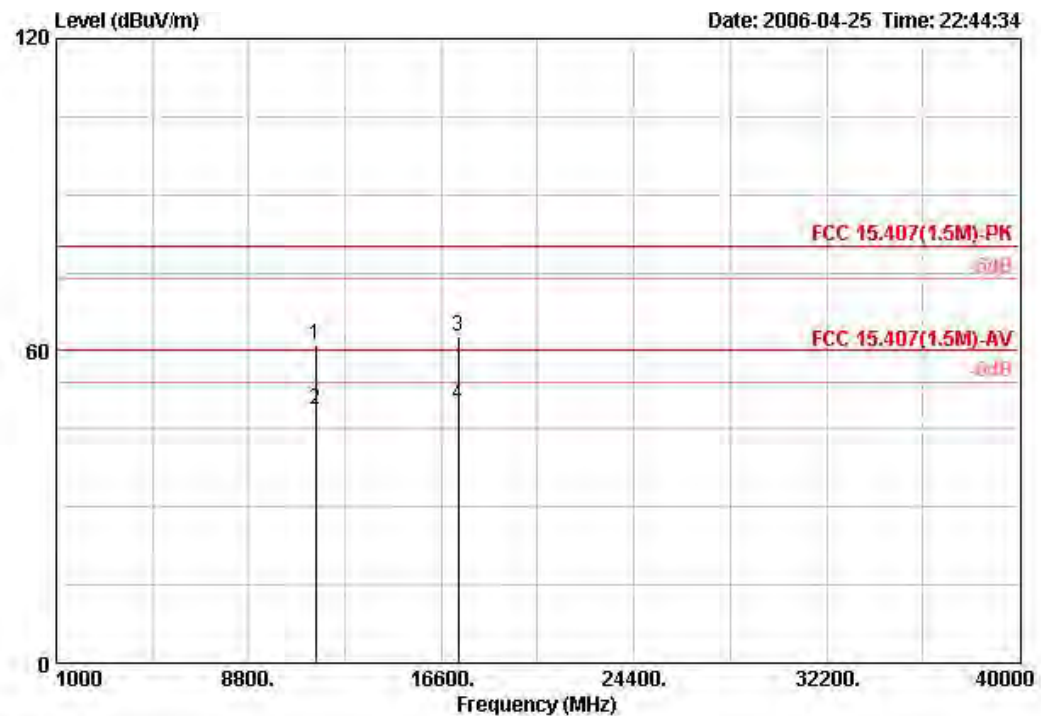

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1	11522.400	60.99	-19.01	80.00	49.61	38.73	7.65	35.00	PEAK	VERTICAL	3
2	11522.960	48.56	-11.44	60.00	37.18	38.73	7.65	35.00	AVERAGE	VERTICAL	3
3	17282.440	62.76	-17.24	80.00	46.11	42.72	8.87	34.94	PEAK	VERTICAL	3
4	17284.800	49.79	-10.21	60.00	33.14	42.72	8.87	34.94	AVERAGE	VERTICAL	3