

Test Report of FCC CFR 47 Part 15 Subpart C

On Behalf of

SHENZHEN OXUNDA ELECTRONIC LIMITED

FCC ID: OCXFN-811
Product Description: WIFI MODULE
Model No.: FN-8110M
Supplementary Model: FN-8111M, FN-8112M

Prepared for: SHENZHEN OXUNDA ELECTRONIC LIMITED
Six Floor,B5 Building,Anle Industrial,Hangcheng Road,Gushu
Baoan District,Shenzhen City,Guangdong Province

Prepared by: Bontek Compliance Testing Laboratory Ltd
1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East
Road, Nanshan, Shenzhen, China
Tel: 86-755-86337020
Fax: 86-755-86337028

Report No.: BCT12FR-0813E

Issue Date: June 18, 2012

Test Date: June 14~18, 2012

Test by:

Reviewed By:



Nie Quan



Kevin Chi

TABLE OF CONTENTS

1. GENERAL INFORMATION	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 RELATED SUBMITTAL(S) / GRANT (S) AND TEST METHODOLOGY.....	4
1.3 TEST FACILITY.....	4
2. SYSTEM TEST CONFIGURATION.....	5
2.1 EUT CONFIGURATION.....	5
2.2 EUT EXERCISE	5
2.3 GENERAL TEST PROCEDURES.....	5
2.4 MEASUREMENT UNCERTAINTY	5
2.5 TEST EQUIPMENT LIST AND DETAILS	6
3. SUMMARY OF TEST RESULTS.....	8
4. TEST OF AC POWER LINE CONDUCTED EMISSION	9
4.1 APPLICABLE STANDARD.....	9
4.2 TEST SETUP DIAGRAM.....	9
4.3 TEST RESULT	9
5. TEST OF MAXIMUM PEAK OUTPUT POWER.....	10
5.1 APPLICABLE STANDARD.....	10
5.2 EUT SETUP.....	10
5.3 TEST EQUIPMENT LIST AND DETAILS	10
5.4 TEST PROCEDURE	10
5.5 TEST RESULT	10
6. TEST OF PEAK POWER SPECTRAL DENSITY	21
6.1 APPLICABLE STANDARD.....	21
6.2 EUT SETUP.....	21
6.3 TEST EQUIPMENT LIST AND DETAILS	21
6.4 TEST PROCEDURE	21
6.5 TEST RESULT	21
7. TEST OF 6DB BANDWIDTH.....	32
7.1 APPLICABLE STANDARD.....	32
7.2 EUT SETUP.....	32
7.3 TEST EQUIPMENT LIST AND DETAILS	32
7.4 TEST PROCEDURE	32
7.5 TEST RESULT	32
8. TEST OF CONDUCTED SPURIOUS EMISSION	43
8.1 APPLICABLE STANDARD.....	43
8.2 EUT SETUP.....	43
8.3 TEST EQUIPMENT LIST AND DETAILS	43
8.4 TEST PROCEDURE	43
8.5 TEST RESULT	43
9. TEST OF RADIATED SPURIOUS EMISSION	47
9.1 RADIATED SPURIOUS EMISSION	47
9.2 RESTRICTED BAND EDGES.....	63
10. ANTENNA REQUIREMENT	72
10.1 STANDARD APPLICABLE.....	72
10.2 ANTENNA CONNECTED CONSTRUCTION	72

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: **SHENZHEN OXUNDA ELECTRONIC LIMITED**
Address of applicant: Six Floor,B5 Building,Anle Industrial,Hangcheng Road,Gushu Baoan District,Shenzhen City,Guangdong Province
Manufacturer: **SHENZHEN OXUNDA ELECTRONIC LIMITED**
Address of manufacturer: Six Floor,B5 Building,Anle Industrial,Hangcheng Road,Gushu Baoan District,Shenzhen City,Guangdong Province

General Description of E.U.T

Items	Description
EUT Description:	WIFI MODULE
Trade Name:	FN-LINK
Model No.:	FN-8110M
Supplementary Model:	FN-8111M, FN-8112M
Frequency Band:	IEEE 802.11b/g, IEEE 802.11n HT20 (DTS Band) : 2412MHz~2462MHz, IEEE 802.11n HT40 (DTS Band) : 2422MHz~2452MHz
Channel Spacing:	IEEE 802.11b/g, 802.11n HT20/HT40: 5MHz
Number of Channels:	IEEE 802.11b/g, 802.11n HT20:11 Channels IEEE 802.11n HT40 :7 Channels
Transmit Data Rate:	IEEE802.11b : 11 , 5.5 , 2 , 1 Mbps IEEE802.11g : 54 , 48 , 36 , 24 , 18 , 12 , 9 , 6 Mbps IEEE802.11n HT20 : 130 , 117 , 104 , 78 , 52 , 39 , 26 , 13 Mbps IEEE802.11n HT40 : 270 , 243 , 216 , 162 , 108 , 81 , 54 , 27 Mbps
Type of Modulation:	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20/40: OFDM (64QAM, 16QAM, QPSK, BPSK)
Antenna Type:	Built-in Antenna
Rated Voltage:	Intput:3.3VDC

Remark: * The test data gathered are from the production sample provided by the manufacturer.
* **Supplementary models have same circuit and appearance.**

1.2 Related Submittal(s) / Grant (s) and Test Methodology

The tests were performed based on the Electromagnetic Interference (EMI) tests performed on the EUT. Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 - 2003 Radiated testing was performed at an antenna to EUT distance 3 meters.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.207, 15.209 and 15.247 rules and the FCC publication KDB558074 of Guidance on Measurements for Digital Transmission Systems (47 CFR 15.247).

1.3 Test Facility

All measurement required was performed at laboratory of Bontek Compliance Testing Laboratory Ltd at 1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East Road, Nanshan, Shenzhen, China.

The test facility is recognized, certified, or accredited by the following organizations:

FCC – Registration No.: 338263

BONTEK COMPLIANCE TESTING LABORATORY LTD. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 338263, March 03, 2011.

IC Registration No.: 7631A

The 3m alternate test site of BONTEK COMPLIANCE TESTING LABORATORY LTD. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 7631A on January 25, 2011.

CNAS - Registration No.: L3923

BONTEK COMPLIANCE TESTING LABORATORY LTD. to ISO/IEC 17025:25 General Requirements for the Competence of Testing and Calibration Laboratories(CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing. The acceptance letter from the CNAS is maintained in our files: Registration: L3923, March 22, 2012.

TUV - Registration No.: UA 50203122-0001

BONTEK COMPLIANCE TESTING LABORATORY LTD. An assessment of the laboratory was conducted according to the "Procedures and Conditions for EMC Test Laboratories" with reference to EN ISO/IEC 17025 by a TUV Rheinland auditor. Audit Report NO. 17010783-002.

2. SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The calibrated antennas used to sample the radiated field strength are mounted on a non-conductive, motorized antenna mast 3 or 10 meters from the leading edge of the turntable.

2.3 General Test Procedures

Conducted Emissions: The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 7.1 of ANSI C63.4-2003 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak detector mode.

Radiated Emissions: The EUT is placed on a turntable, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4-2009.

2.4 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Power Line Conducted Emission	+/- 2.3 dB
Radiated Emission	+/- 3.4 dB

Uncertainty figures are valid to a confidence level of 95%.

2.5 Test Equipment List and Details

Test equipments list of Shenzhen Bontek Compliance Testing Laboratory Co., Ltd .

No.	Equipment	Manufacturer	Model No.	S/N	Calculator date	Calculator due date
1	EMI Test Receiver	R&S	ESCI	100687	2012-4-6	2013-4-5
2	EMI Test Receiver	R&S	ESPI	100097	2011-7-25	2012-7-24
3	Amplifier	HP	8447D	1937A02492	2012-4-6	2013-4-5
4	Horn Antenna	R/S	CH14-H052	1091698	2012-4-6	2013-4-5
5	Horn Antenna	SCHWARZBECK	BBHA9120A	0499	2011-11-28	2012-11-27
6	Single Power Conductor Module	FCC	FCC-LISN-5-50-1-01-CISPR25	07101	2012-4-6	2013-4-5
7	Single Power Conductor Module	FCC	FCC-LISN-5-50-1-01-CISPR25	07102	2012-4-6	2013-4-5
8	Power Clamp	SCHWARZBECK	MDS-21	3812	2012-4-6	2013-4-5
9	Positioning Controller	C&C	CC-C-1F	MF7802113	N/A	N/A
10	Electrostatic Discharge Simulator	TESEQ	NSG437	125	2011-4-11	2012-4-10
11	Fast Transient Burst Generator	SCHAFFNER	MODULA6150	34572	2012-4-6	2013-4-5
12	Fast Transient Noise Simulator	Noiseken	FNS-105AX	10501	2011-6-16	2012-6-15
14	Color TV Pattern Generator	PHILIPS	PM5418	TM209947	N/A	N/A
15	Power Frequency Magnetic Field Generator	EVERFINE	EMS61000-8K	608002	2012-4-6	2013-4-5
16	Capacitive Coupling Clamp	TESEQ	CDN8014	25096	2012-4-6	2013-4-5
17	High Field Biconical Antenna	ELECTRO-METRICS	EM-6913	166	2011-11-28	2012-11-27
18	Log Periodic Antenna	ELECTRO-METRICS	EM-6950	811	2011-11-28	2012-11-27
19	Remote Active Vertical Antenna	ELECTRO-METRICS	EM-6892	304	2011-11-28	2012-11-27
20	TRILOG Broadband Test-Antenna	SCHWARZBECK	VULB9163	9163-324	N/A	N/A
21	Teo Line Single Phase Module	SCHWARZBECK	NSLK8128	8128247	2011-10-24	2012-10-23
22	Triple-Loop Antenna	EVERFINE	LLA-2	711002	2012-4-6	2013-4-5
23	Electric bridge	Jhai	JK2812C	803024	N/A	N/A
24	RF POWER AMPLIFIER	FRANKONIA	FLL-75	1020A1109	2012-4-6	2013-4-5
25	CDN	FRANKONIA	CDN M2+M3	A3027019	2012-4-6	2013-4-5
26	6DB Attenuator	FRANKONIA	N/A	1001698	2012-4-6	2013-4-5
27	EM Injection clamp	FCC	F-203I-23mm	091536	2012-4-6	2013-4-5

28	9kHz-2.4GHz signal generator 2024	MARCONI	10S/6625-99-457-8730	112260/042	2012-4-6	2013-4-5
29	10dB attenuator	ELECTRO-METRICS	EM-7600	836	2012-4-6	2013-4-5
30	ISN	TESEQ	ISN-T800	30301	2011-6-23	2012-6-22
31	10KV surge generator	SANKI	SKS-0510M	048110003E321	2011-11-14	2012-11-13
32	HRMONICS&FLICKRE ANALYSER	VOLTECH	PM6000	200006700433	2011-6-27	2012-6-26
33	Spectrum Analyzer	R&S	FSP	100397	2011-11-2	2012-11-1
34	Broadband preamplifier	SCHWARZBECK	BBV9718	9718-182	2012-4-6	2013-4-5
35	Temperature & Humidity Chamber	TOPSTAT	TOS-831A	3438A05208	2012-4-6	2013-4-5

3. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.207	AC Power Line Conducted Emission	N/A
FCC §15.247(b)	Maximum Peak Output Power	Pass
FCC §15.247(e)	Power Spectral Density	Pass
FCC §15.247(a)	6dB Bandwidth	Pass
FCC §15.247 (d)	Conducted Spurious Emission	Pass
FCC §15.205 and §15.209 &	Radiated Spurious Emission	Pass
FCC §15.203/15.247(b)/(c)	Antenna Requirement	Pass

4. TEST OF AC POWER LINE CONDUCTED EMISSION


4.1 Applicable Standard

Refer to FCC §15.207.

For a Low-power Radio-frequency Device is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency Range (MHz)	Limits (dBuV)	
	Quasi-Peak	Average
0.150~0.500	66~56	56~46
0.500~5.000	56	46
5.000~30.00	60	50

4.2 Test Setup Diagram

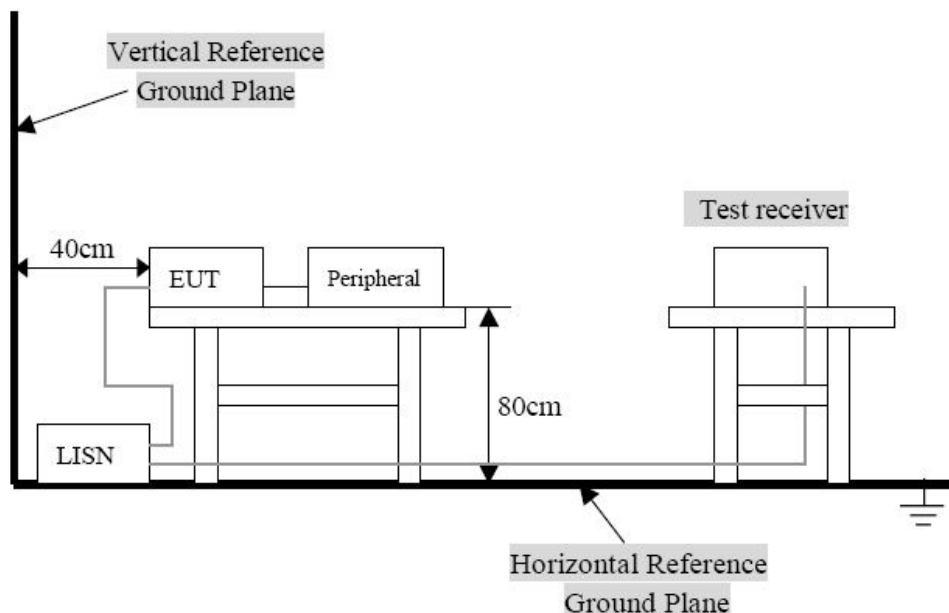

Remark: 1. The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC 15.207 limits.


2. The EUT is excluded from investigation of Disturbance Voltage at The Mains Terminals, for it is powered by DC 3V. According to the Section 15.207(d), measurement to demonstrate compliance with the limits of Disturbance Voltage at The Mains Terminals are not required to the devices which only employed battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

5. Test of Maximum Peak Output Power

5.1 Applicable Standard

Refer to FCC §15.247 (b)

5.2 EUT Setup

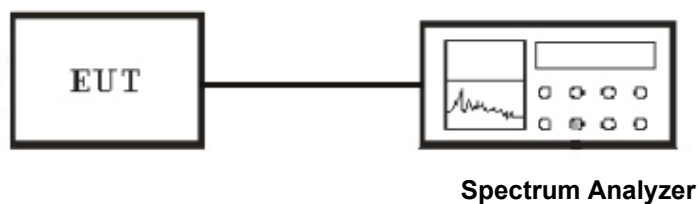

5.3 Test Equipment List and Details

See section 2.5.

5.4 Test Procedure

Connect the EUT to spectrum analyzer, set the center frequency of the spectrum analyzer to the channel center frequency. Set the RBW to 1MHz and VBW to 3MHz.

Measurement of Digital Transmission Systems Operating under Section 15.247

5.5 Test Result

Temperature (°C) : 22~23	EUT: WIFI MODULE
Humidity (%RH) : 50~54	M/N: FN-8110M
Barometric Pressure (mbar) : 950~1000	Operation Condition: Tx Mode

IEEE 802.11b mode

Channel	Channel Frequency (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Pass / Fail
Low	2412	9.34	30	PASS
Middle	2437	10.34	30	PASS
High	2462	11.01	30	PASS

NOTE : 1. At final test to get the worst-case emission at 11Mbps.

IEEE 802.11g mode

Channel	Channel Frequency (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Pass / Fail
Low	2412	9.06	30	PASS
Middle	2437	9.54	30	PASS
High	2462	9.89	30	PASS

NOTE : 1. At final test to get the worst-case emission at 54Mbps.

IEEE 802.11n HT20 mode

Channel	Channel Frequency (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Pass / Fail
Low	2412	8.25	30	PASS
Middle	2437	8.09	30	PASS
High	2462	8.93	30	PASS


NOTE : 1. At final test to get the worst-case emission at 13Mbps.

IEEE 802.11n HT40 mode


Channel	Channel Frequency (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Pass / Fail
Low	2422	4.85	30	PASS
Middle	2437	5.00	30	PASS
High	2452	5.47	30	PASS

NOTE : 1. At final test to get the worst-case emission at 27Mbps.


MAXIMUM PEAK OUTPUT POWER (802.11b MODE CH Low)

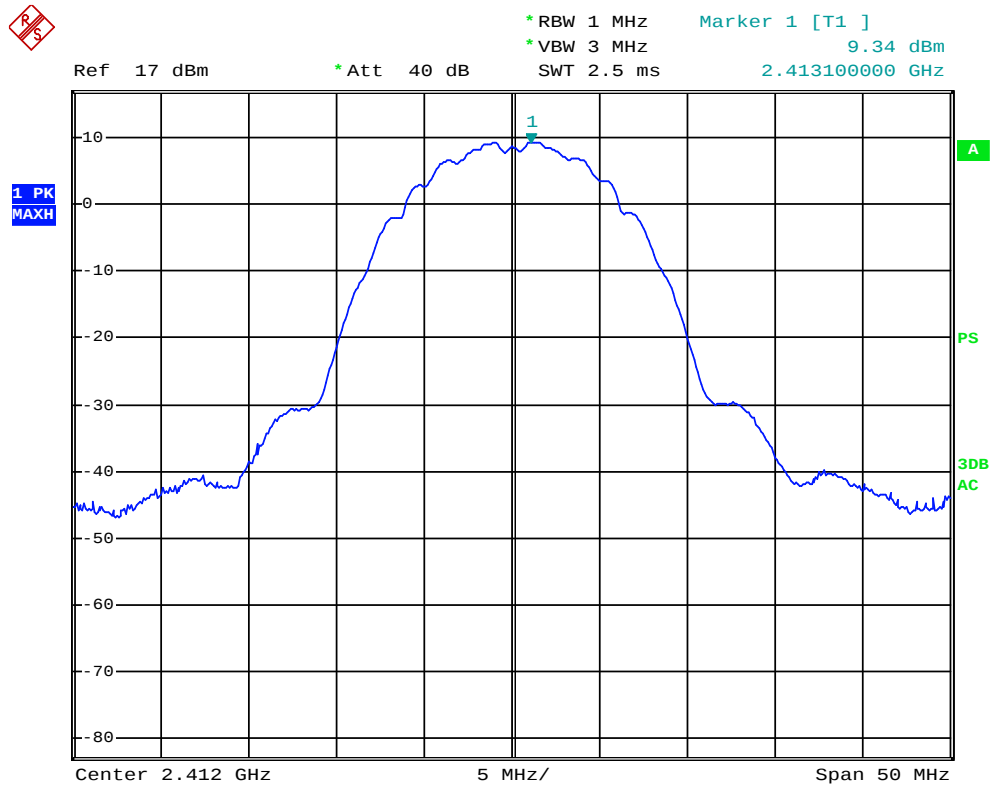


MAXIMUM PEAK OUTPUT POWER (802.11b MODE CH Mid)

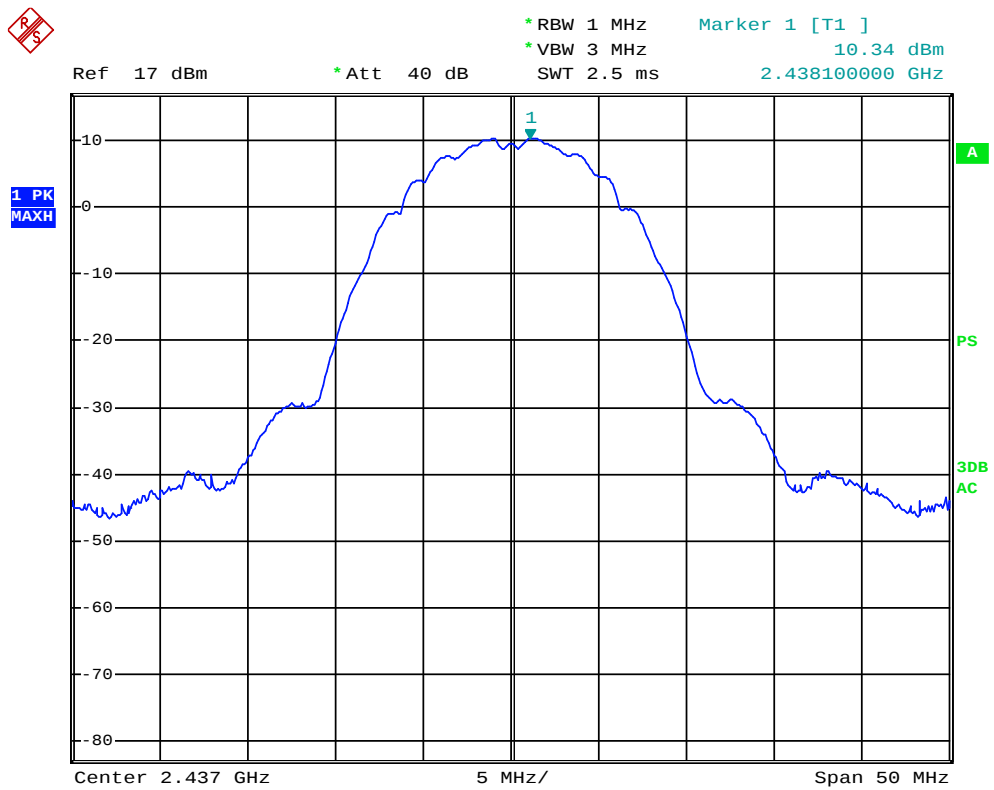


MAXIMUM PEAK OUTPUT POWER (802.11b MODE CH High)

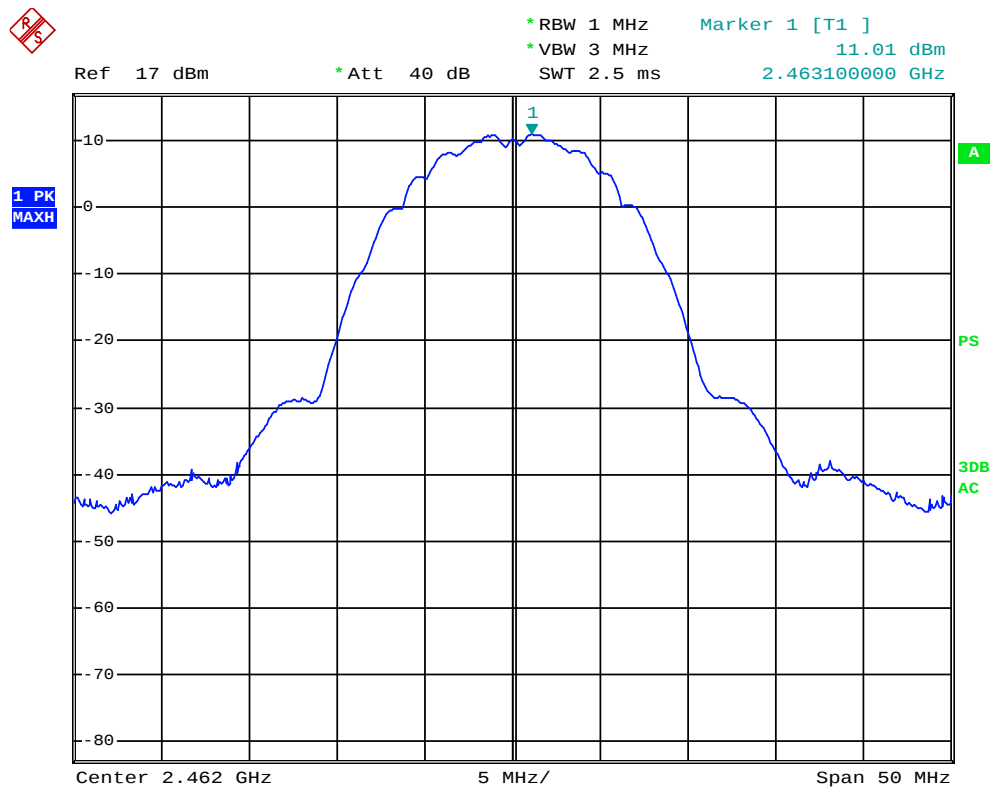


MAXIMUM PEAK OUTPUT POWER (802.11g MODE CH Low)

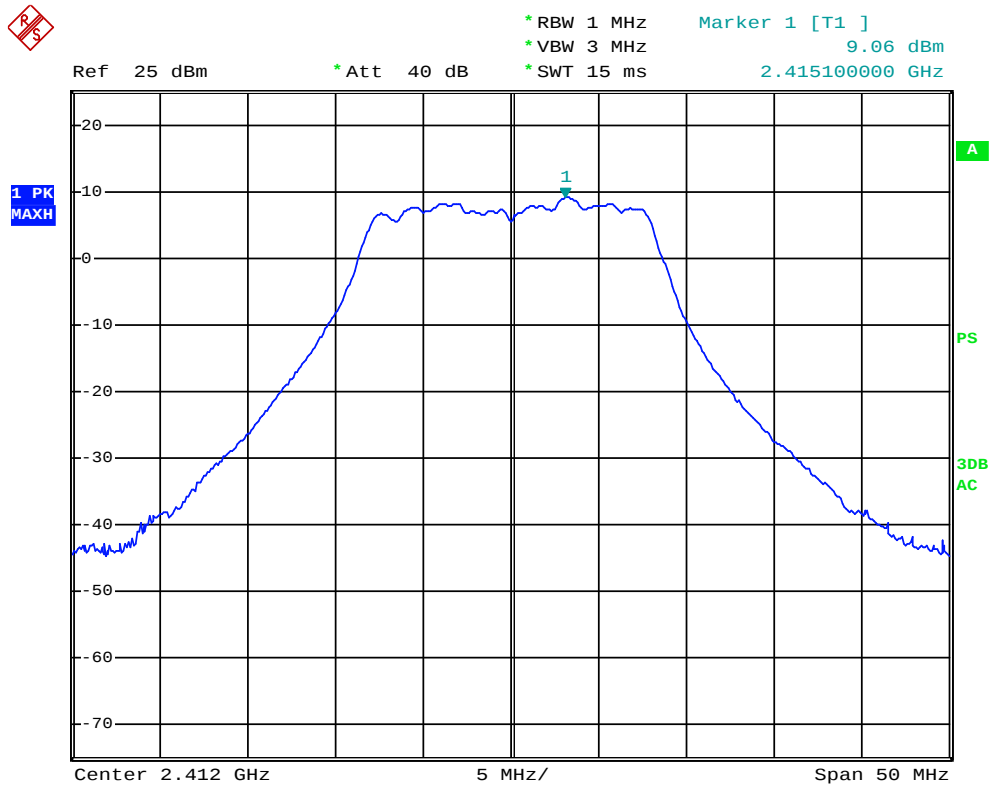


MAXIMUM PEAK OUTPUT POWER (802.11g MODE CH Mid)

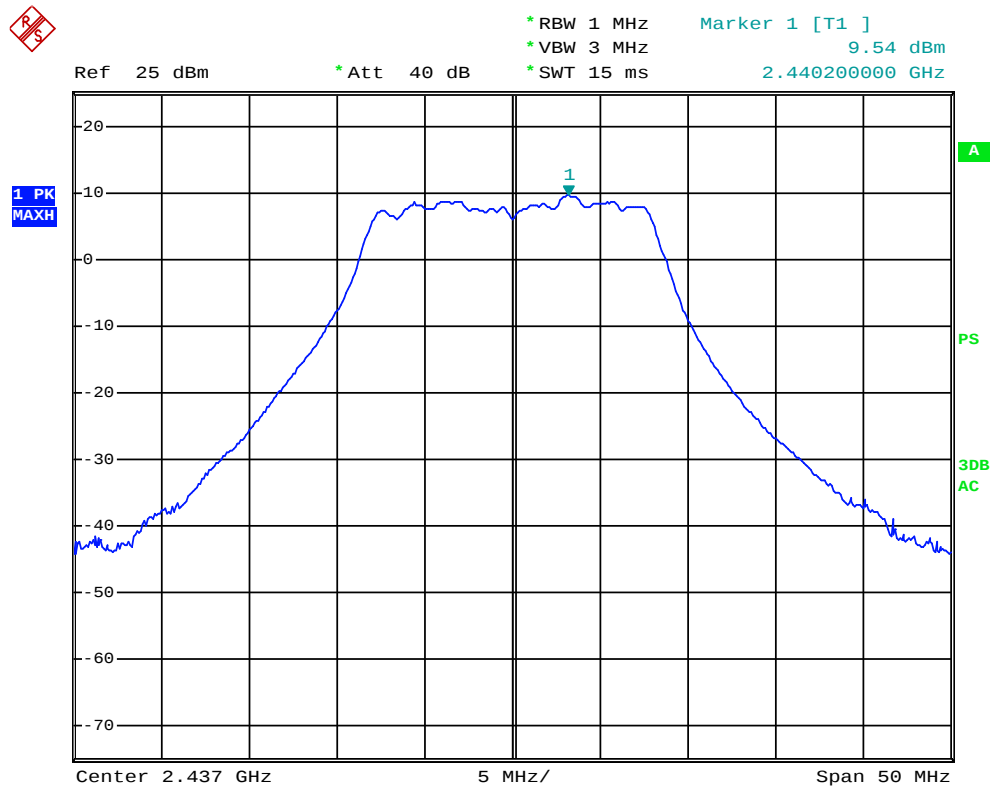


MAXIMUM PEAK OUTPUT POWER (802.11g MODE CH High)

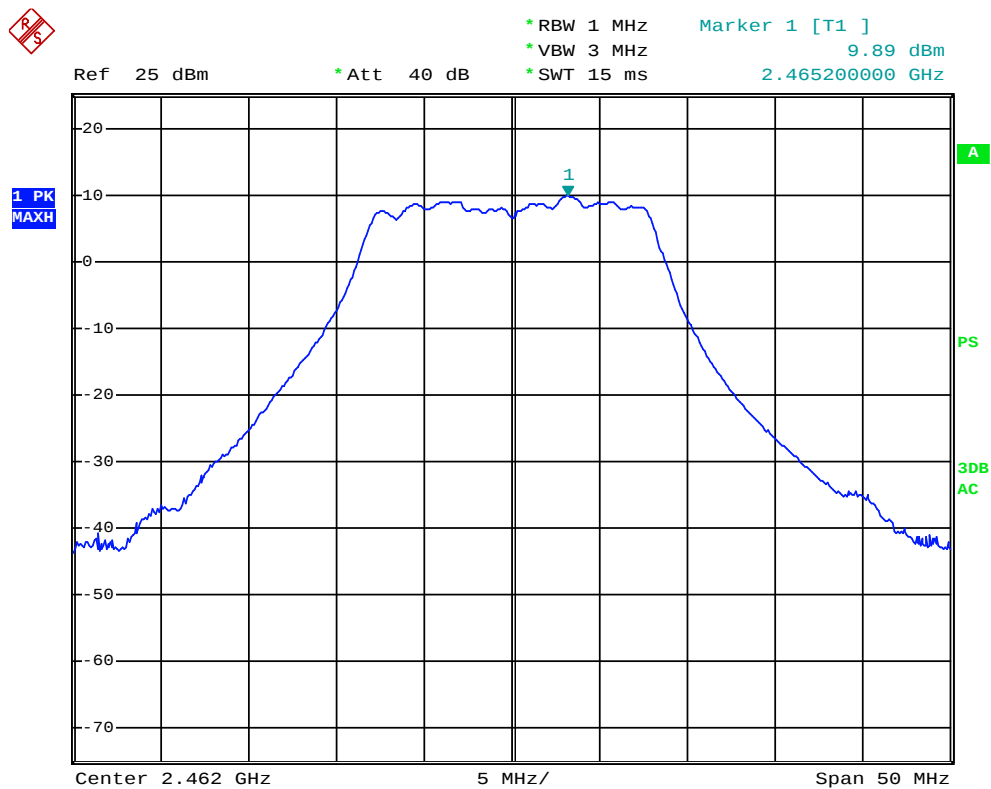


MAXIMUM PEAK OUTPUT POWER (802.11n HT20 MODE CH Low)

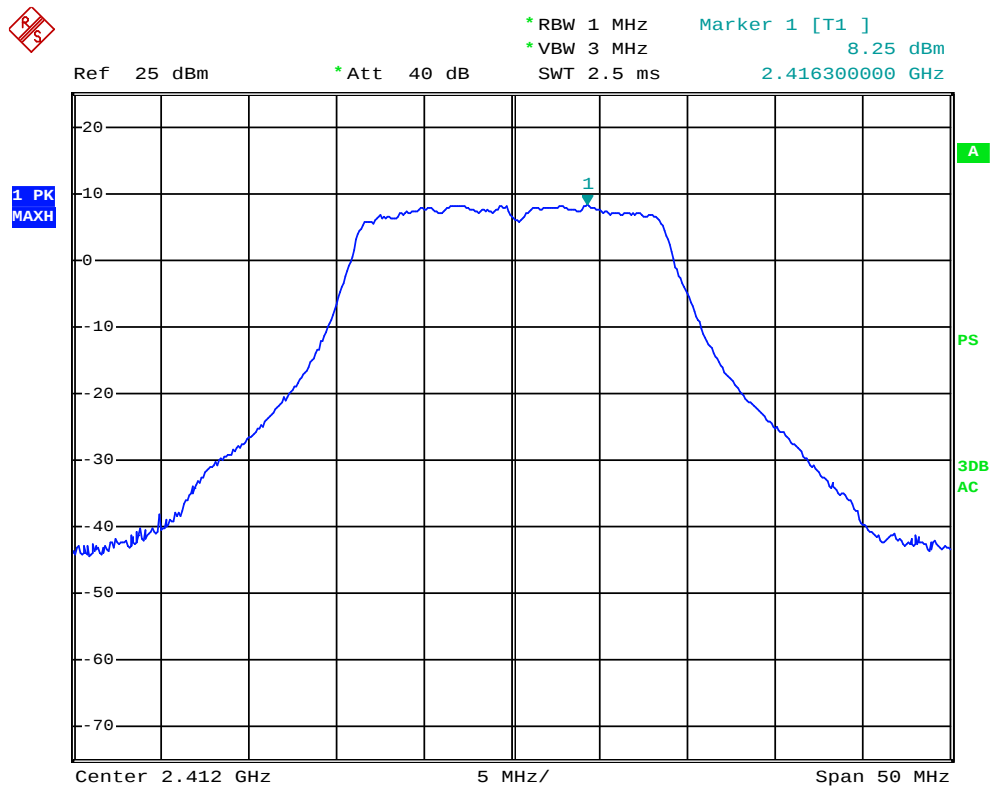


MAXIMUM PEAK OUTPUT POWER (802.11n HT20 MODE CH Mid)

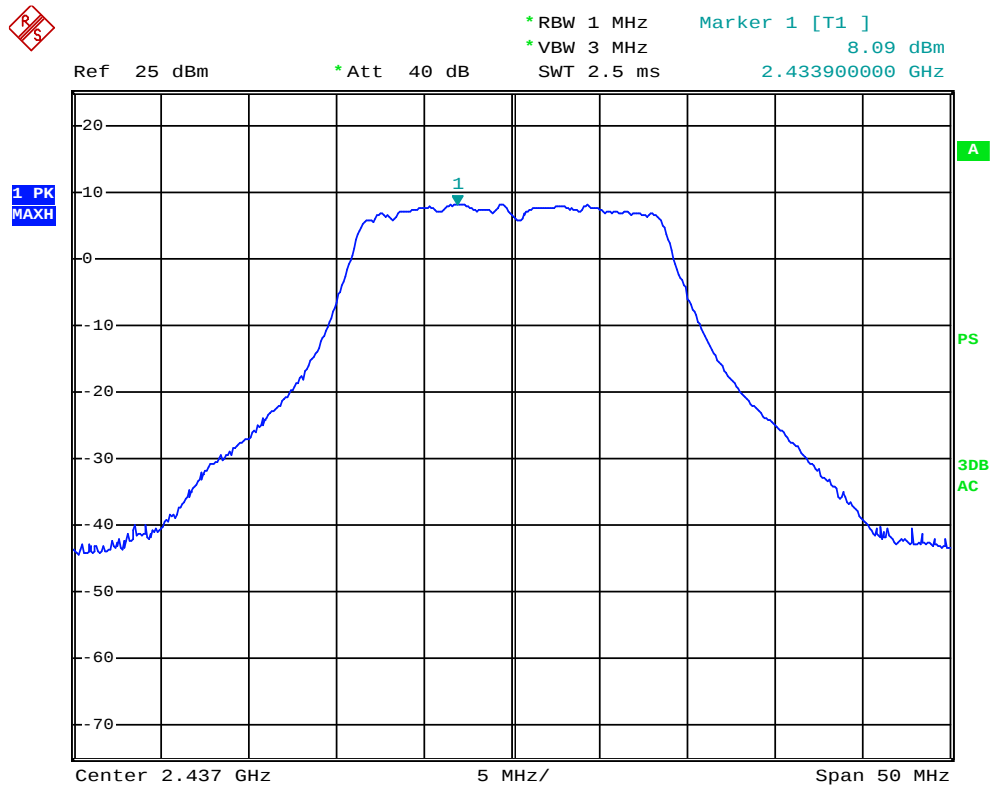


MAXIMUM PEAK OUTPUT POWER (802.11n HT20 MODE CH High)

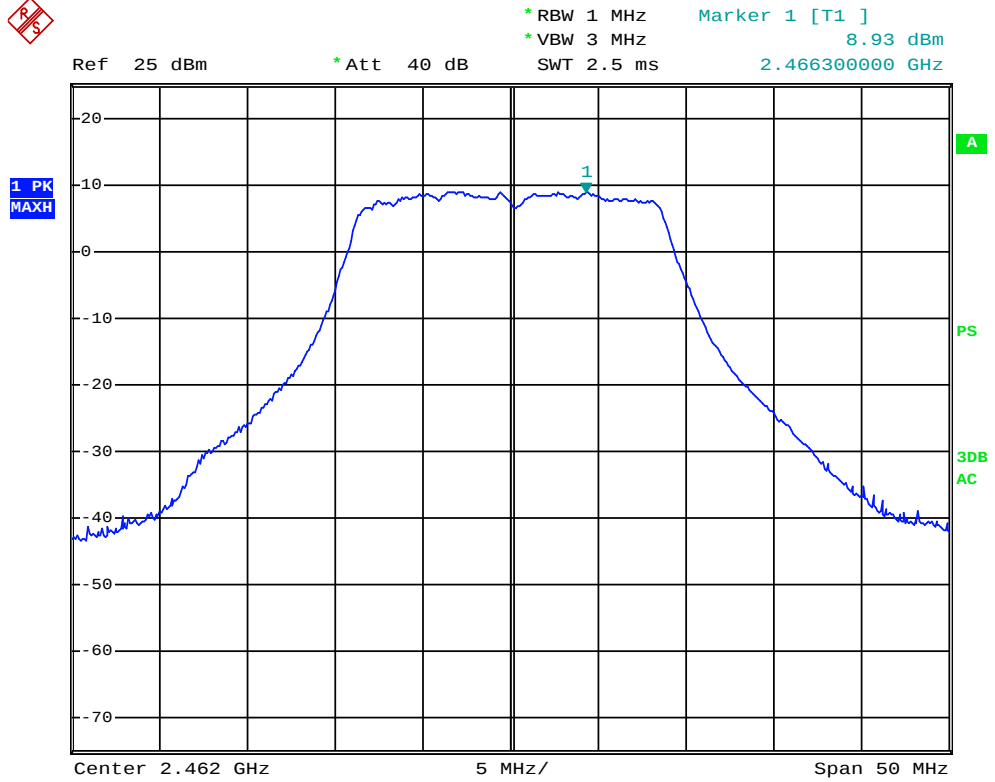


MAXIMUM PEAK OUTPUT POWER (802.11n HT40 MODE CH Low)

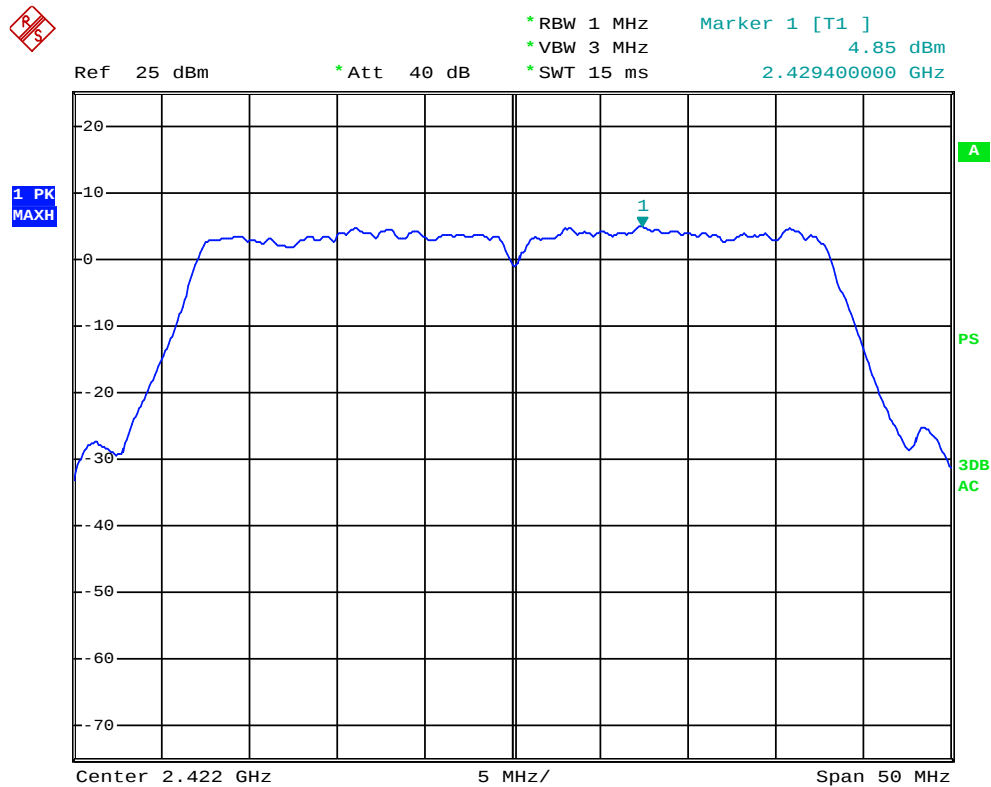

MAXIMUM PEAK OUTPUT POWER (802.11n HT40 MODE CH Mid)

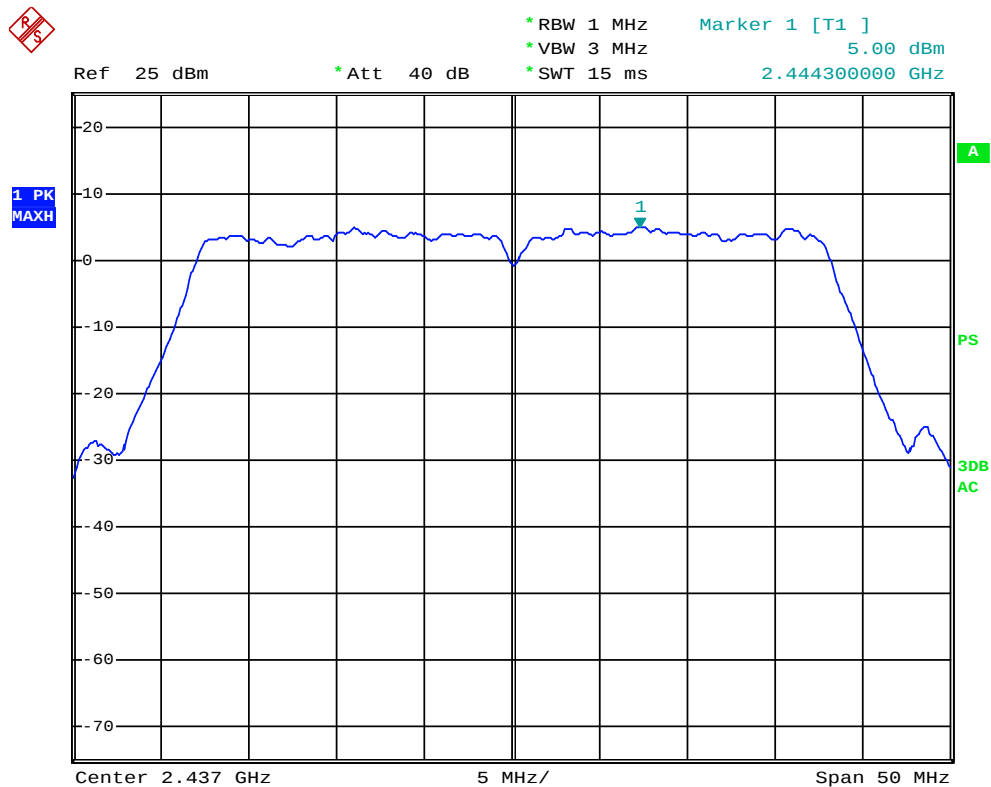

MAXIMUM PEAK OUTPUT POWER (802.11n HT40 MODE CH High)

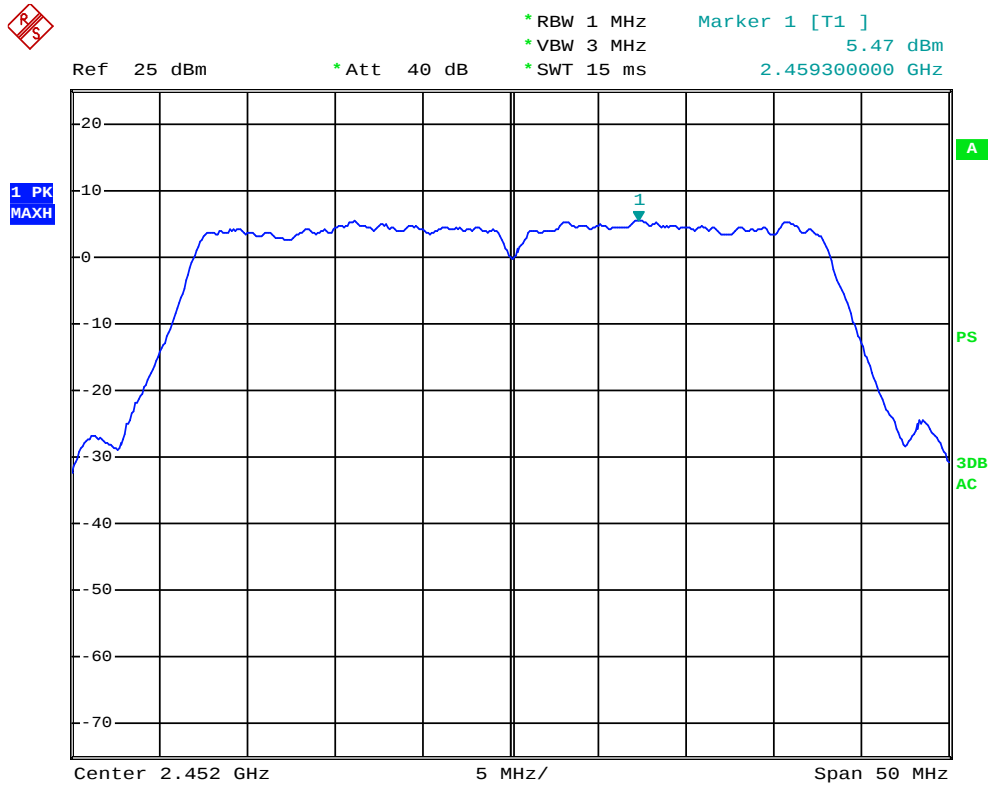


6. Test of Peak Power Spectral Density

6.1 Applicable Standard

Refer to FCC §15.247 (e).

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

6.2 EUT Setup

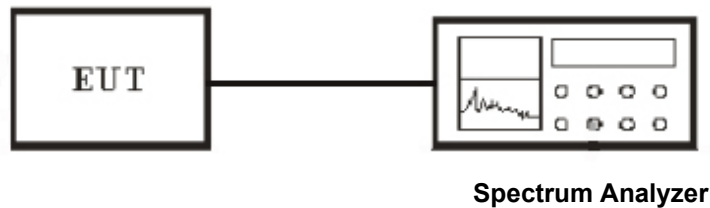

6.3 Test Equipment List and Details

See section 2.5.

6.4 Test Procedure

The transmitter output was connected to the spectrum analyzer, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using $RBW=3\text{KHz}$ and $VBW \geq RBW$, set sweep time=span / 3KHz.

The power spectral density was measured and recorded. The sweep time is allowed to be longer than span / 3KHz for a full response of the mixer in the spectrum analyzer.

6.5 Test Result

Temperature (°C) : 22~23	EUT: WIFI MODULE
Humidity (%RH) : 50~54	M/N: FN-8110M
Barometric Pressure (mbar) : 950~1000	Operation Condition: Tx Mode

IEEE 802.11b mode

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)	Maximum Limit (dBm)	Pass / Fail
Low	2412	-18.37	8	PASS
Middle	2437	-17.03	8	PASS
High	2462	-15.90	8	PASS

NOTE : 1. At final test to get the worst-case emission at 11Mbps.

IEEE 802.11g mode

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)	Maximum Limit (dBm)	Pass / Fail
Low	2412	-15.96	8	PASS
Middle	2437	-17.07	8	PASS
High	2462	-15.69	8	PASS

NOTE : 1. At final test to get the worst-case emission at 6Mbps.

IEEE 802.11n HT20 mode

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz (dBm)	Maximum Limit (dBm)	Pass / Fail
Low	2412	-15.95	8	PASS
Middle	2437	-17.51	8	PASS
High	2462	-16.17	8	PASS


NOTE : 1. At final test to get the worst-case emission at 13Mbps.

IEEE 802.11n HT40 mode


Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)	Maximum Limit (dBm)	Pass / Fail
Low	2422	-17.04	8	PASS
Middle	2437	-15.96	8	PASS
High	2452	-17.41	8	PASS

NOTE : 1. At final test to get the worst-case emission at 27Mbps.


POWER SPECTRAL DENSITY (802.11b MODE CH Low)

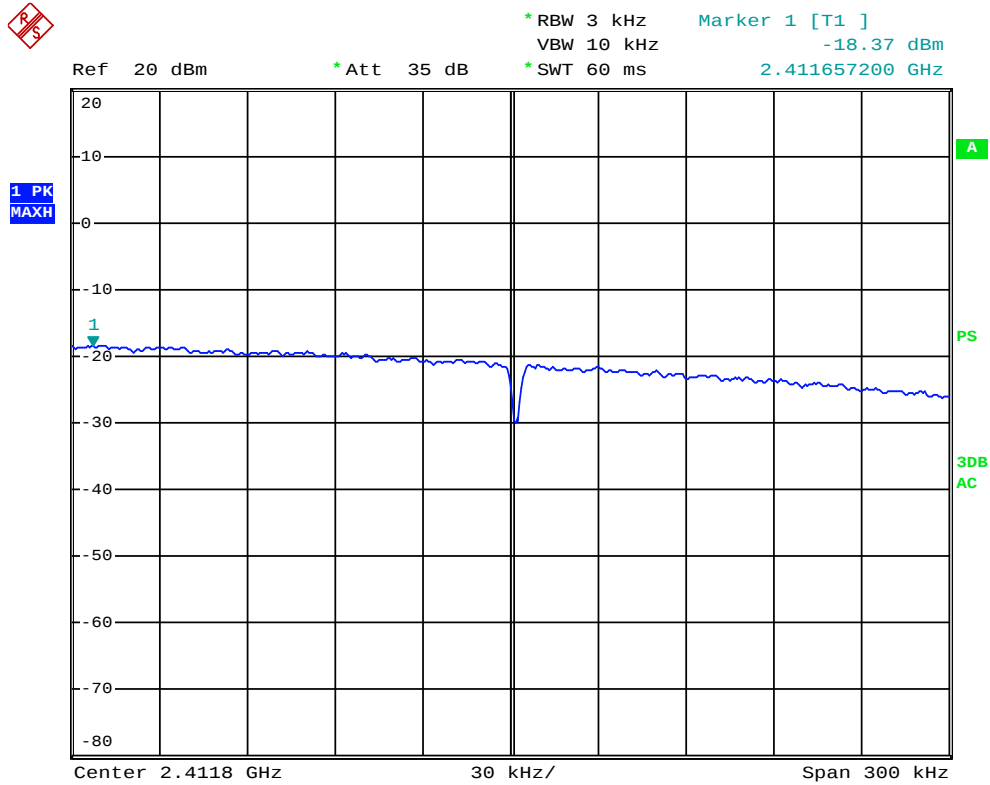


POWER SPECTRAL DENSITY (802.11b MODE CH Mid)

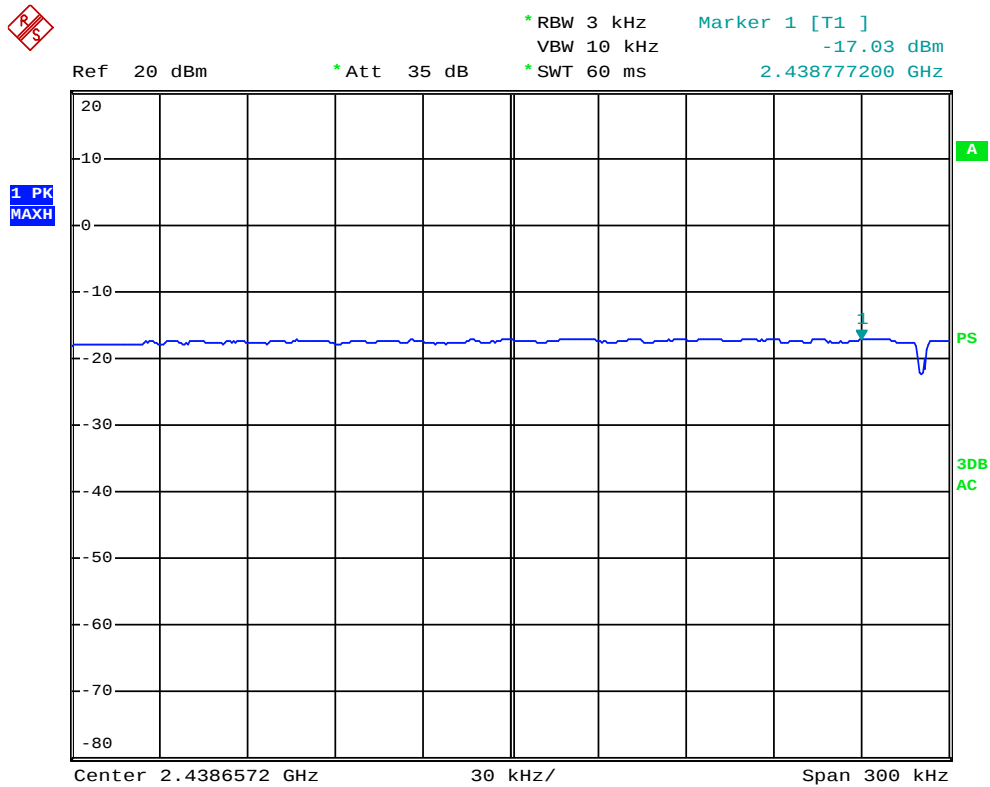


POWER SPECTRAL DENSITY (802.11b MODE CH High)

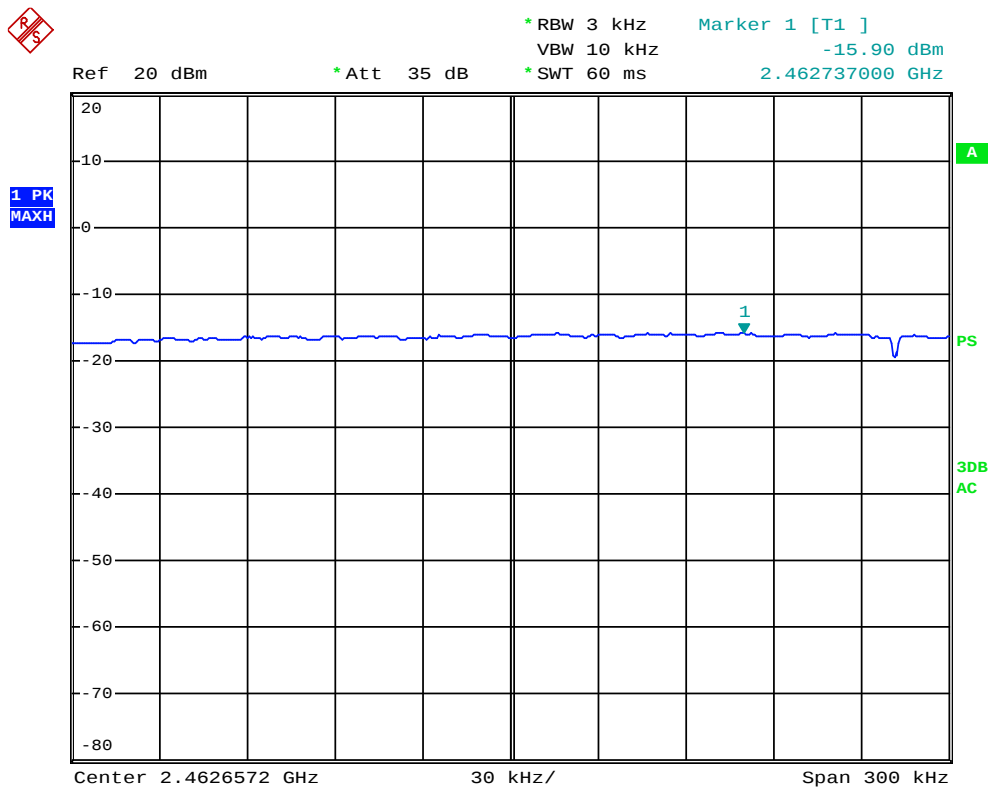


POWER SPECTRAL DENSITY (802.11g MODE CH Low)

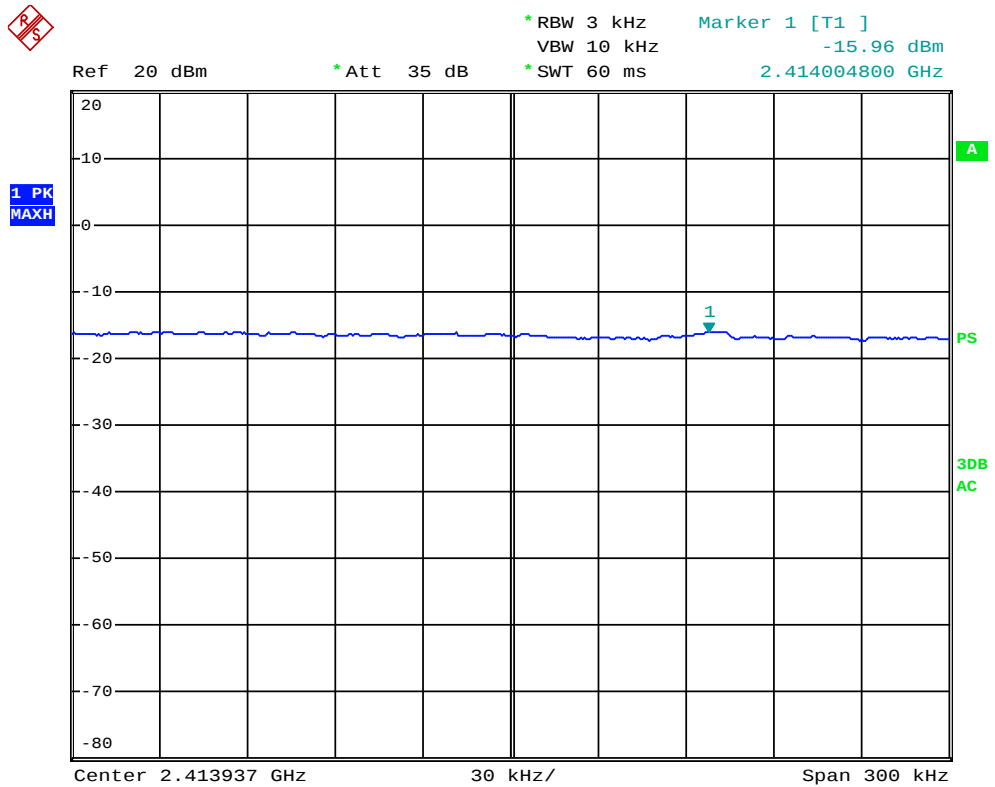


POWER SPECTRAL DENSITY (802.11g MODE CH Mid)

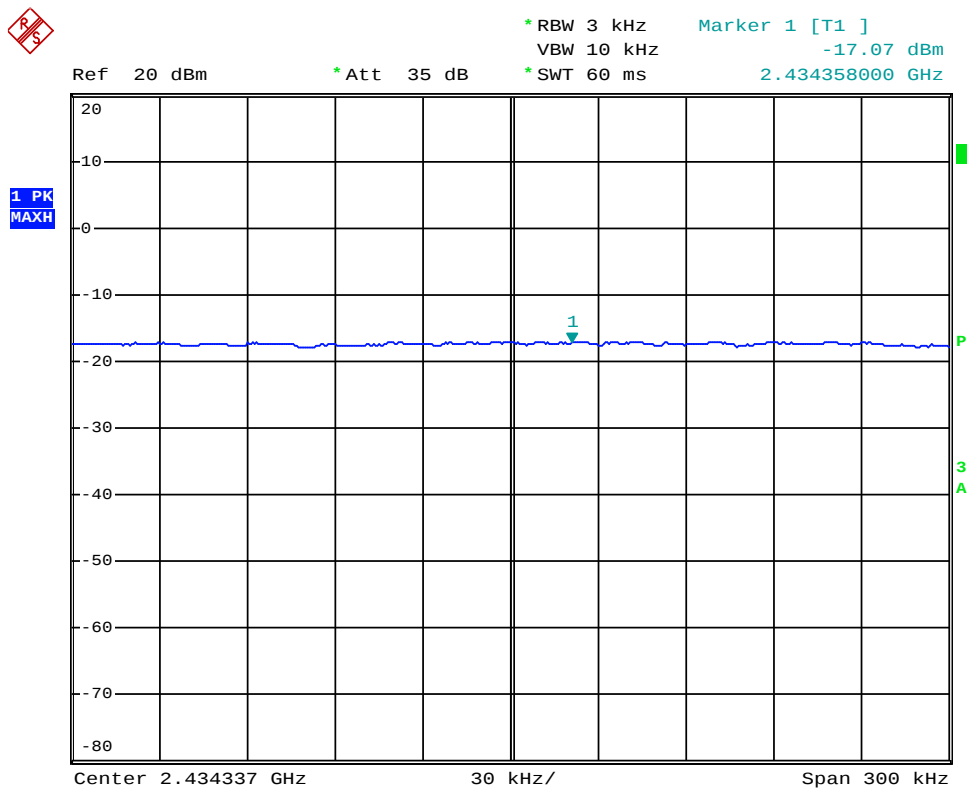


POWER SPECTRAL DENSITY (802.11g MODE CH High)

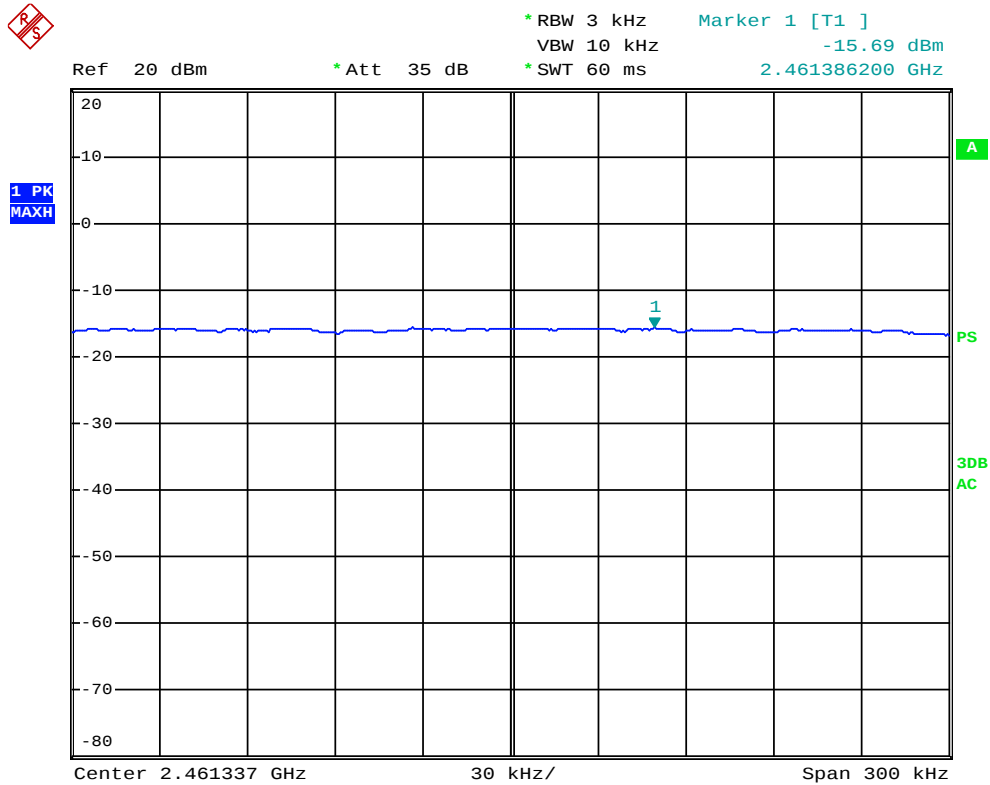

POWER SPECTRAL DENSITY (802.11n HT20 MODE CH Low)

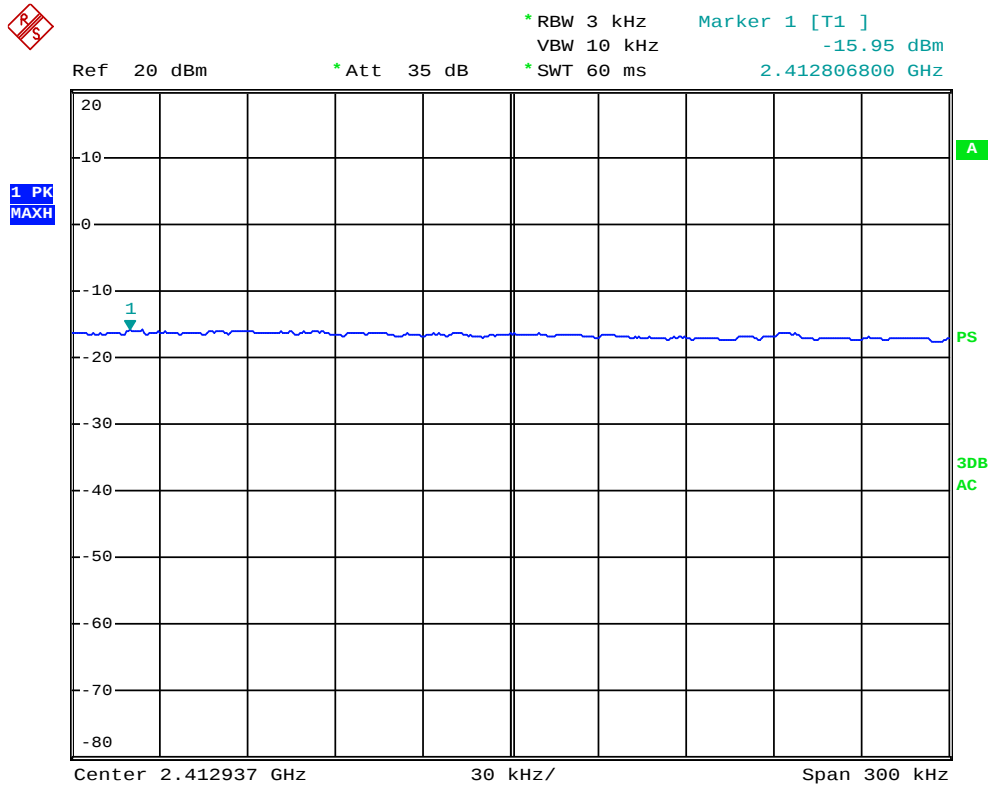

POWER SPECTRAL DENSITY (802.11n HT20 MODE CH Mid)

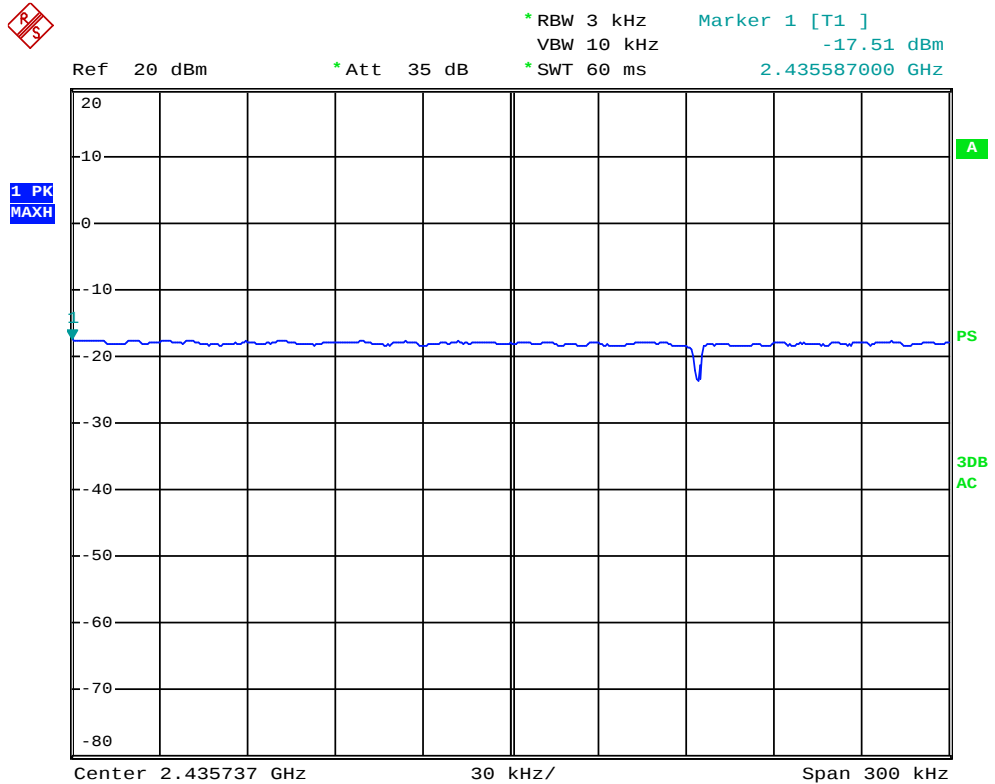

POWER SPECTRAL DENSITY (802.11n HT20 MODE CH High)




*RBW 3 kHz Marker 1 [T1]
VBW 10 kHz -16.17 dBm
*SWT 60 ms 2.461349600 GHz

Ref 20 dBm

*Att 35 dB

1 PK
MAXH

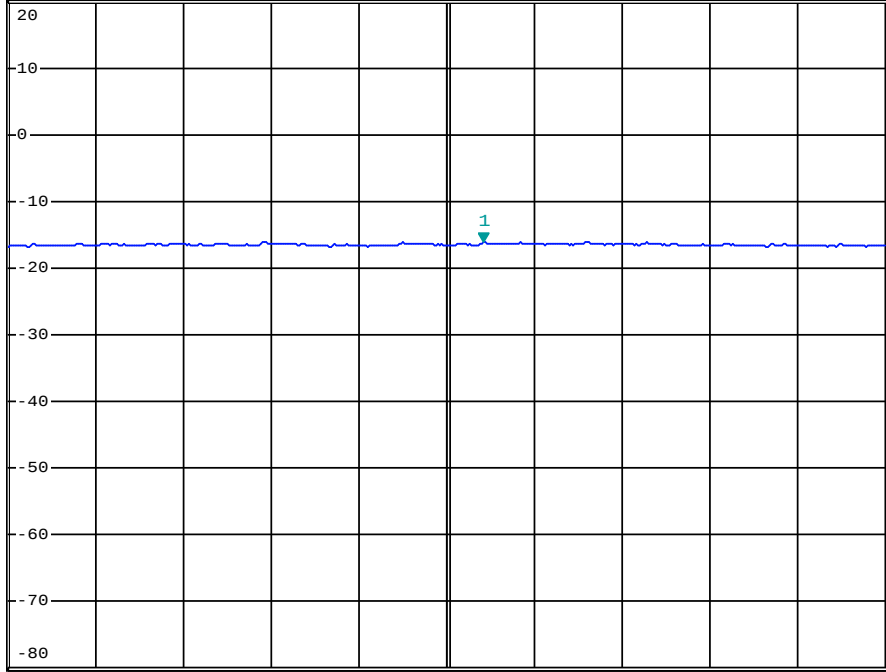


Center 2.461337 GHz


30 kHz/

Span 300 kHz

POWER SPECTRAL DENSITY (802.11n HT40 MODE CH Low)

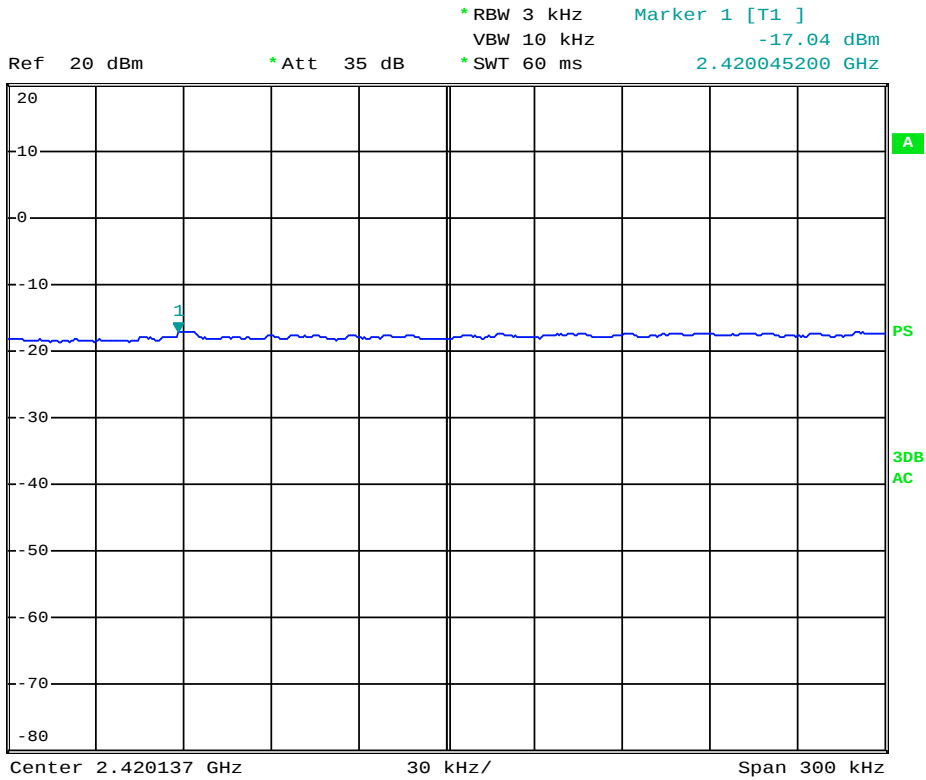

POWER SPECTRAL DENSITY (802.11n HT40 MODE CH Mid)

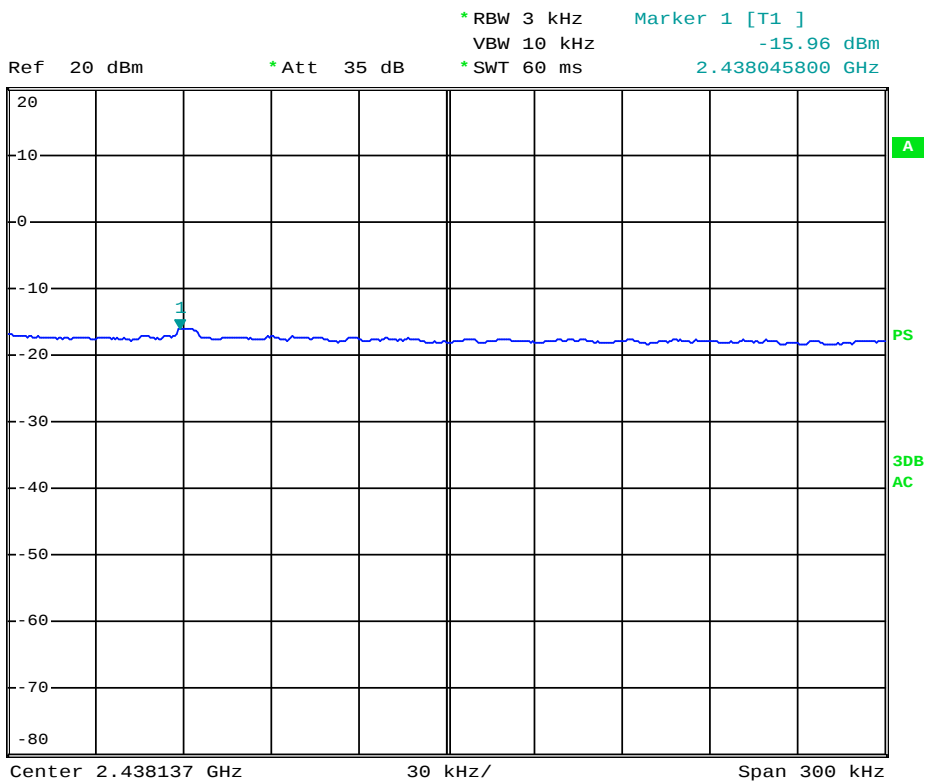

POWER SPECTRAL DENSITY (802.11n HT40 MODE CH High)




*RBW 3 kHz Marker 1 [T1]
VBW 10 kHz -17.41 dBm
*SWT 60 ms 2.463481000 GHz

Ref 20 dBm

*Att 35 dB

1 PK
MAXH

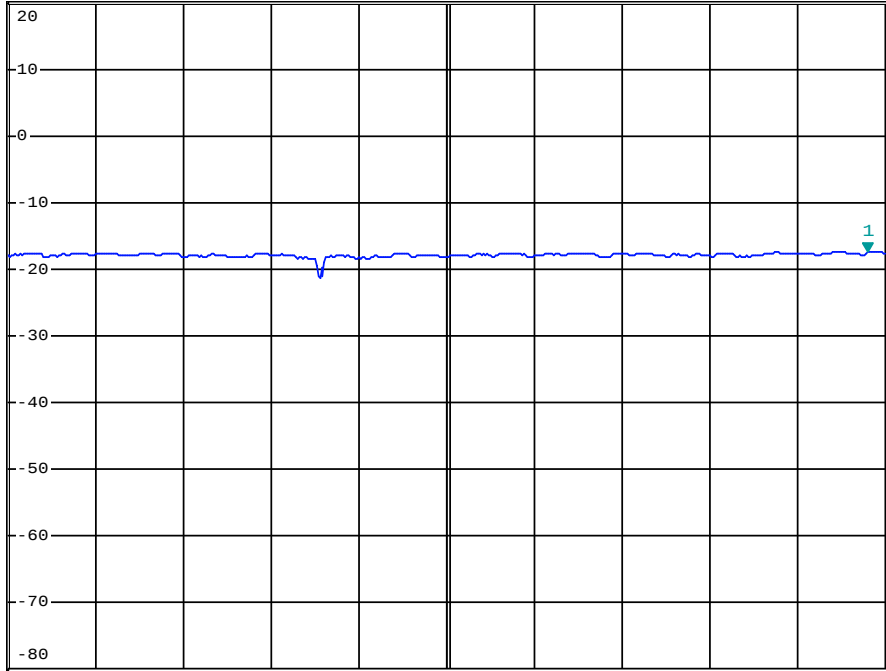

Center 2.463337 GHz

30 kHz/

Span 300 kHz


7. Test of 6dB Bandwidth

7.1 Applicable Standard

Refer to FCC §15.247 (a) (2).

The minimum 6 dB bandwidth shall be at least 500 kHz.

7.2 EUT Setup

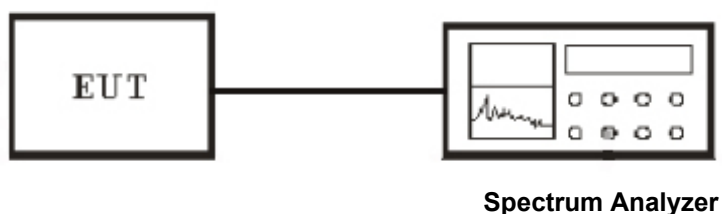

7.3 Test Equipment List and Details

See section 2.5.

7.4 Test Procedure

The transmitter output was connected to a spectrum analyzer. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 100 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

7.5 Test Result

Temperature (°C) : 22~23	EUT: WIFI MODULE
Humidity (%RH) : 50~54	M/N: FN-8110M
Barometric Pressure (mbar) : 950~1000	Operation Condition: Tx Mode

IEEE 802.11b mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass / Fail
Low	2412	9500	500	PASS
Middle	2437	8700	500	PASS
High	2462	10200	500	PASS

NOTE : 1. At final test to get the worst-case emission at 11Mbps.

IEEE 802.11g mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass / Fail
Low	2412	16500	500	PASS
Middle	2437	16600	500	PASS
High	2462	16600	500	PASS

NOTE : 1. At final test to get the worst-case emission at 6Mbps.

IEEE 802.11n HT20 mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass / Fail
Low	2412	17800	500	PASS
Middle	2437	17800	500	PASS
High	2462	17900	500	PASS


NOTE : 1. At final test to get the worst-case emission at 13Mbps.

IEEE 802.11n HT40 mode


Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass / Fail
Low	2422	36300	500	PASS
Middle	2437	36500	500	PASS
High	2452	36500	500	PASS

NOTE : 1. At final test to get the worst-case emission at 27Mbps.

6dB BANDWIDTH (802.11b MODE CH Low)

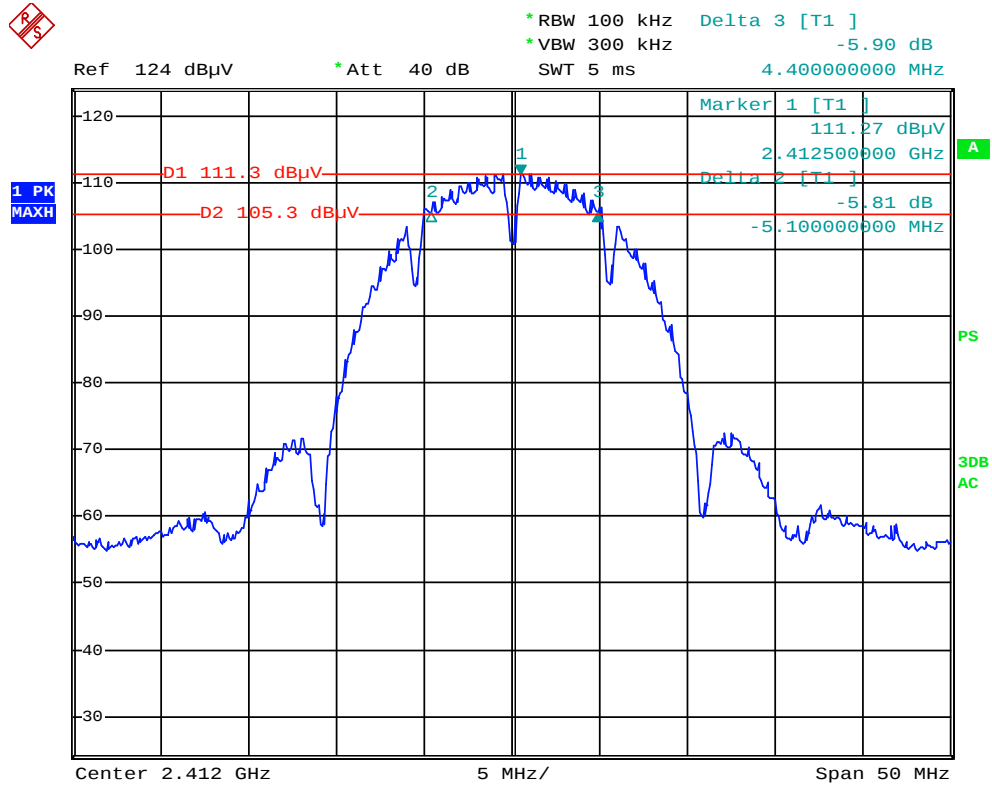


6dB BANDWIDTH (802.11b MODE CH Mid)

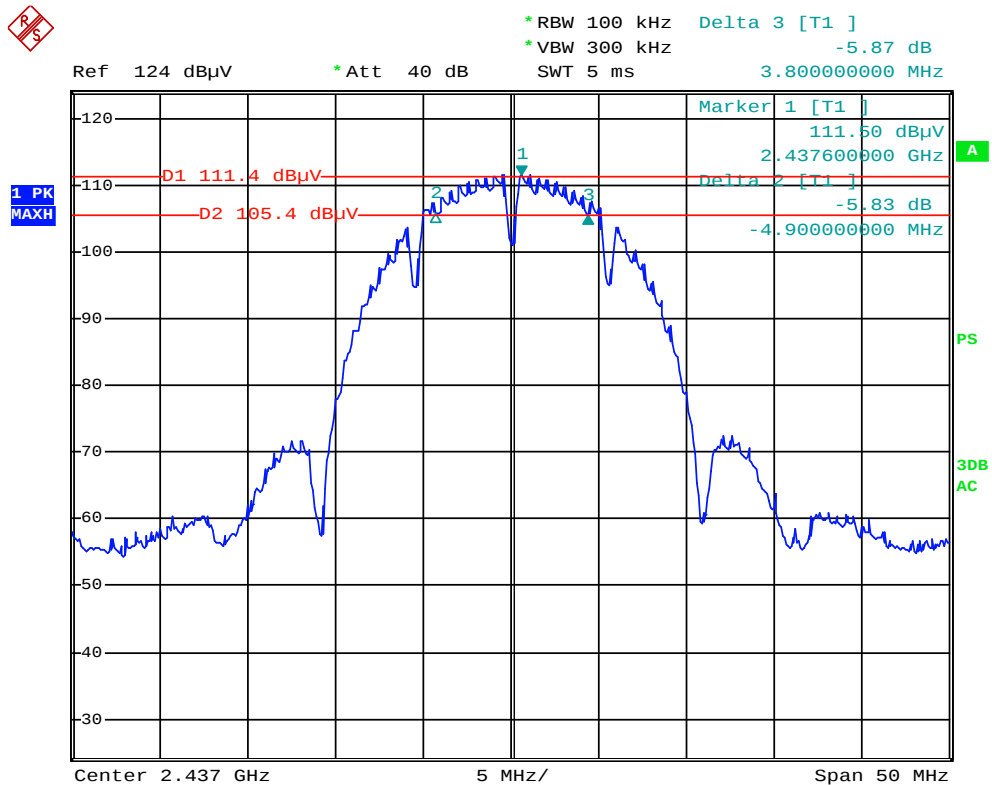


6dB BANDWIDTH (802.11b MODE CH High)




* RBW 100 kHz Delta 3 [T1]
 * VBW 300 kHz -4.86 dB
 * Att 40 dB
 * Ref 124 dBμV
 * SWT 5 ms 4.600000000 MHz

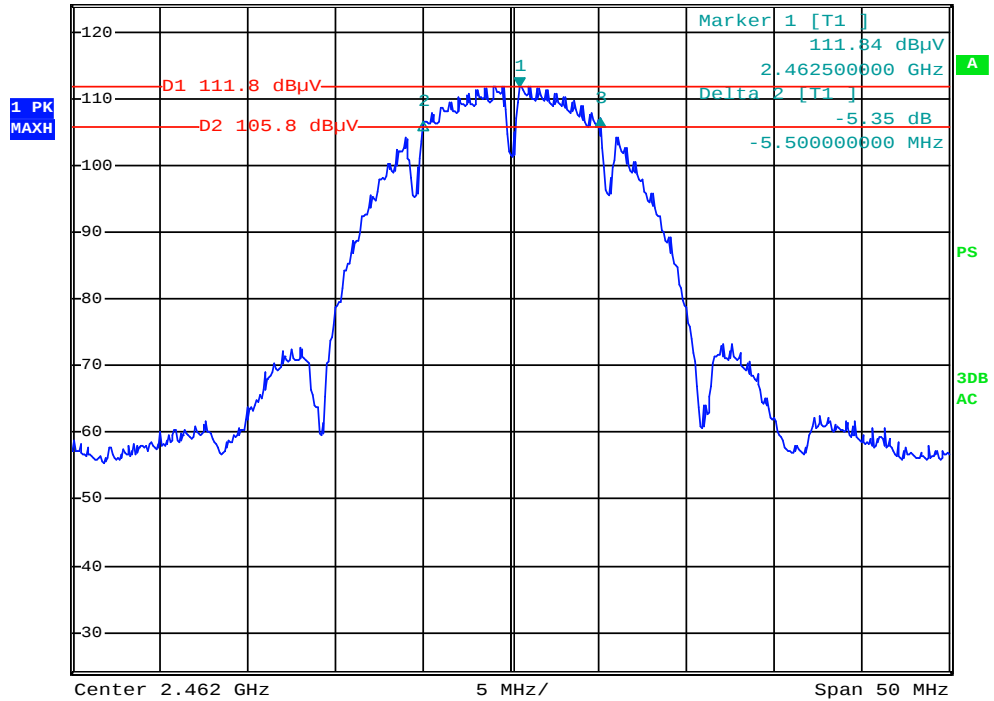

6dB BANDWIDTH (802.11g MODE CH Low)

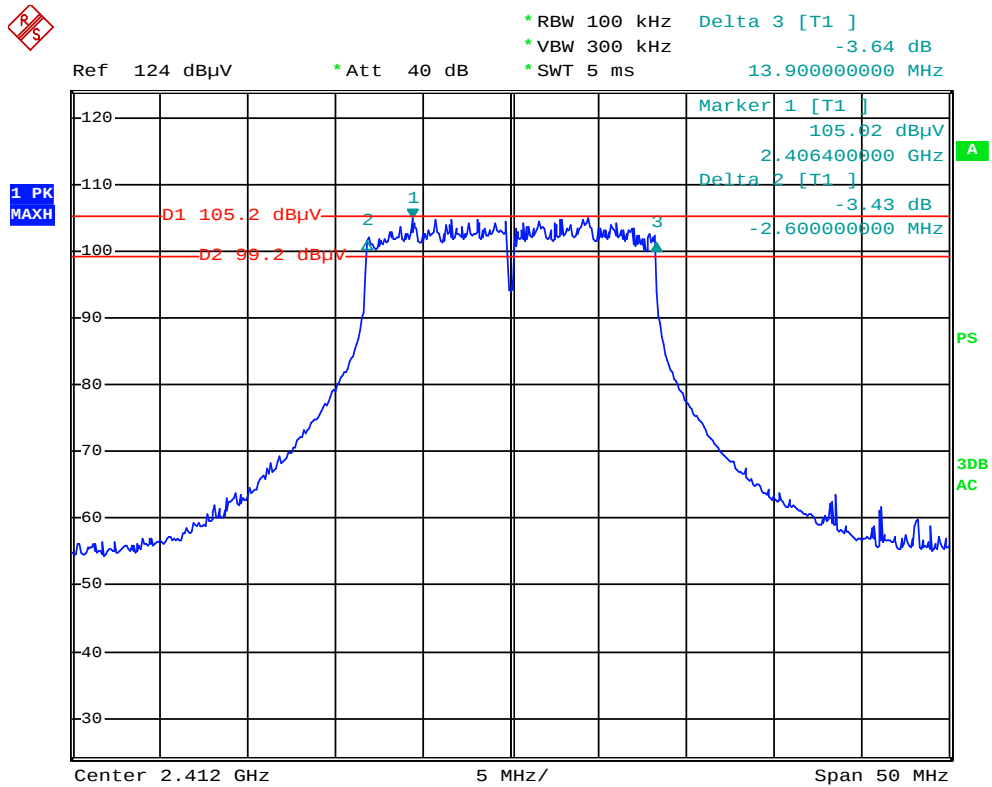


6dB BANDWIDTH (802.11g MODE CH Mid)

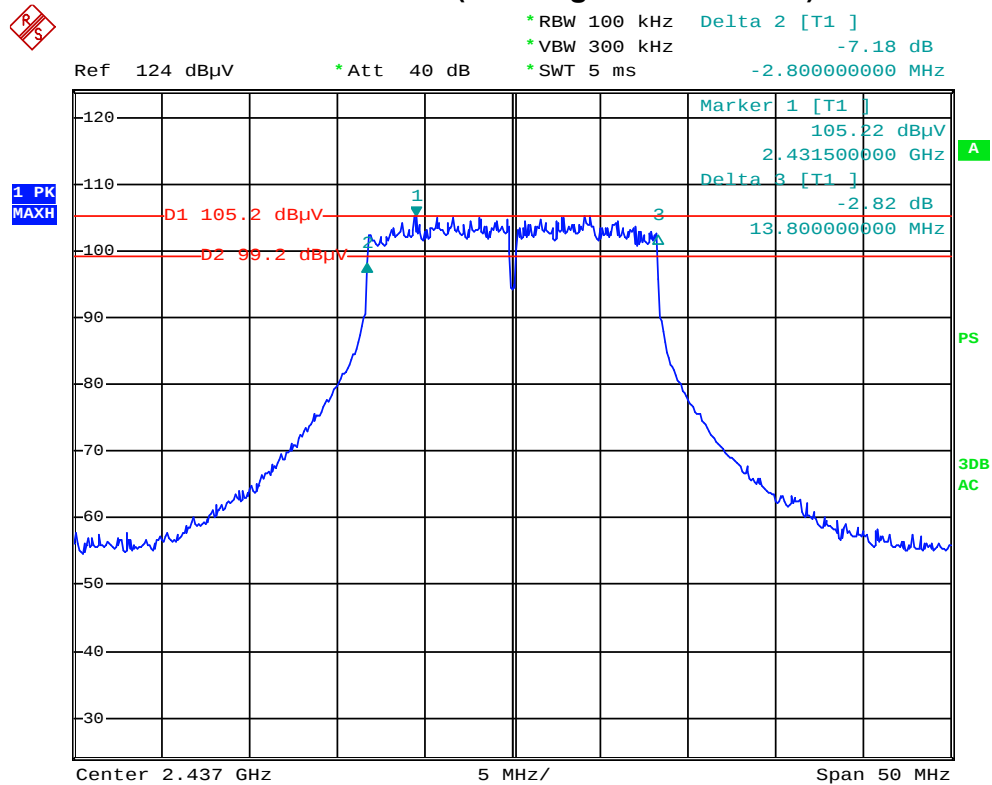


6dB BANDWIDTH (802.11g MODE CH High)




Ref 124 dBμV * Att 40 dB * RBW 100 kHz Delta 3 [T1] -3.15 dB
 * VBW 300 kHz * SWT 5 ms 13.900000000 MHz

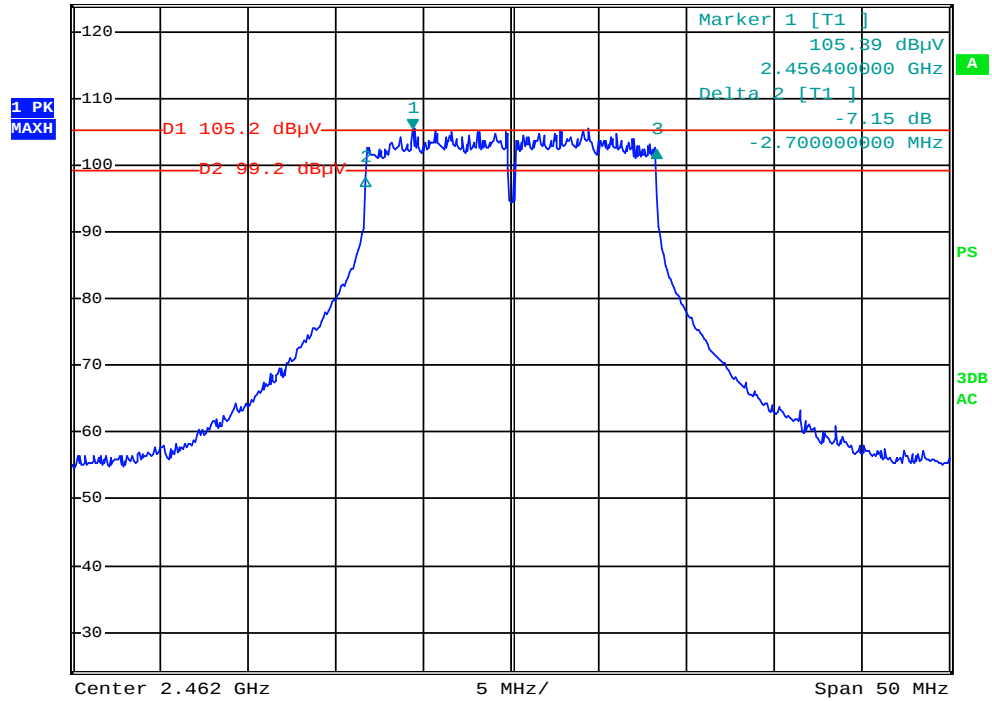


6dB BANDWIDTH (802.11n HT20 MODE CH Low)

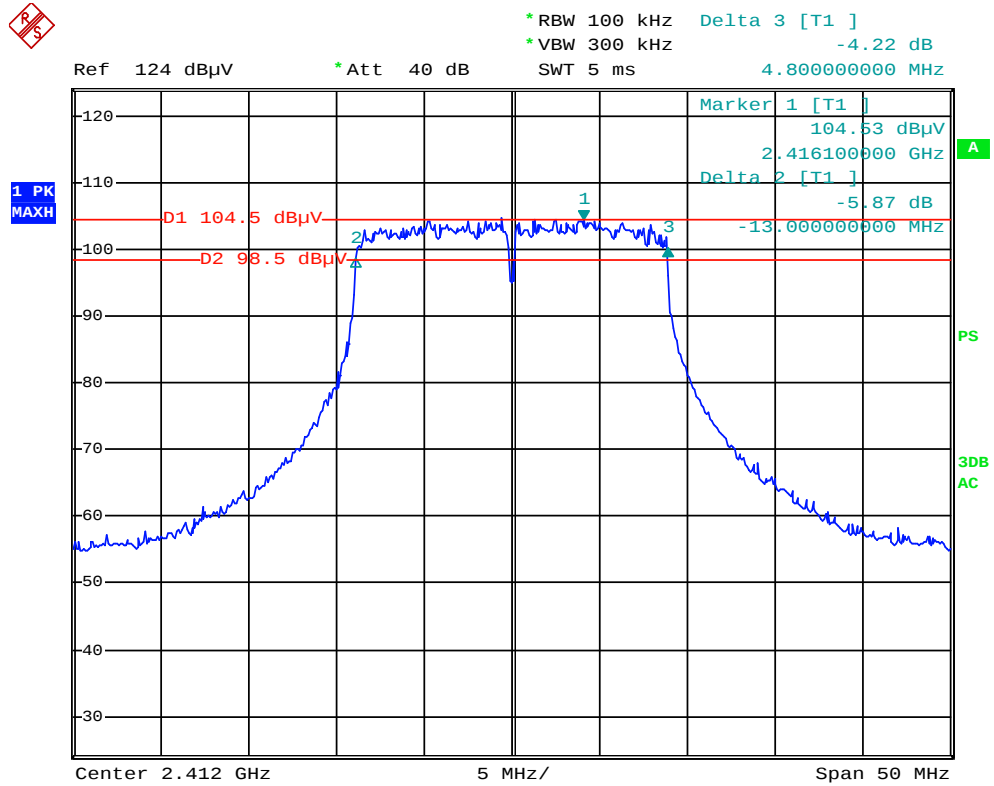


6dB BANDWIDTH (802.11n HT20 MODE CH Mid)

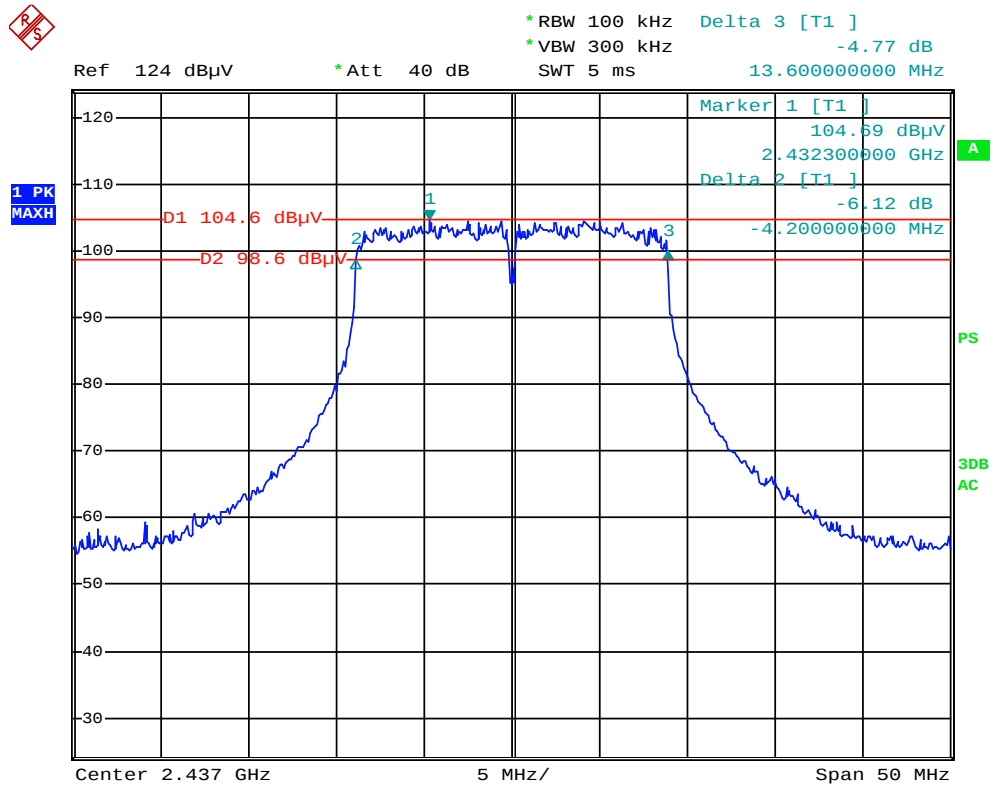


6dB BANDWIDTH (802.11n HT20 MODE CH High)

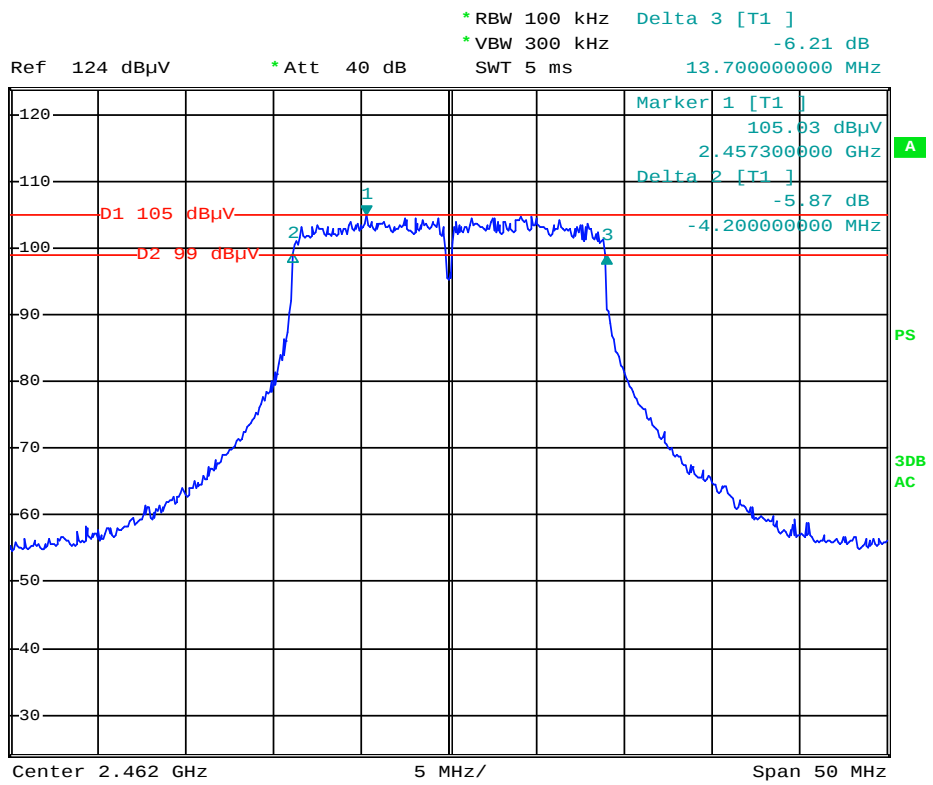

6dB BANDWIDTH (802.11n HT40 MODE CH Low)

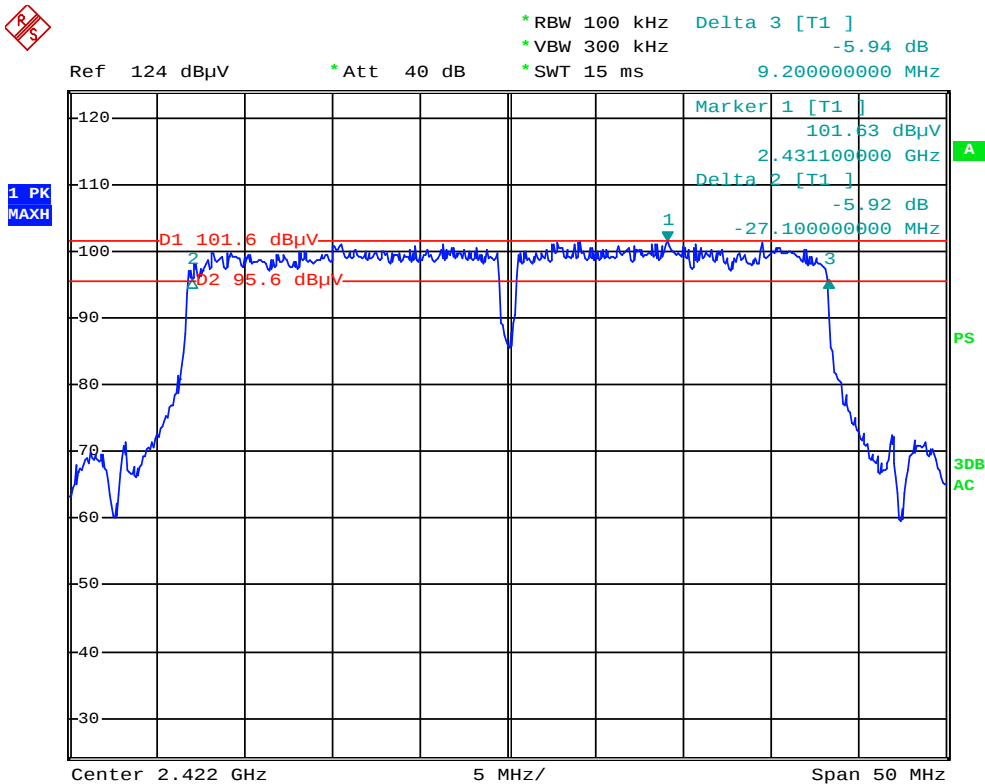


6dB BANDWIDTH (802.11n HT40 MODE CH Mid)

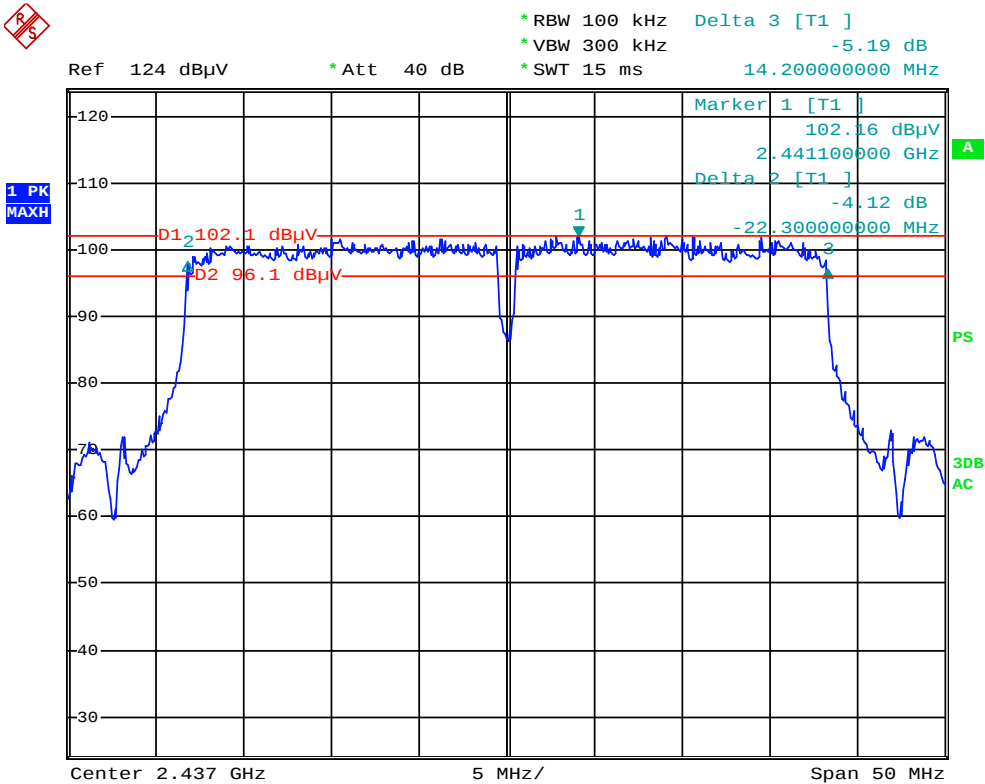



6dB BANDWIDTH (802.11n HT40 MODE CH High)

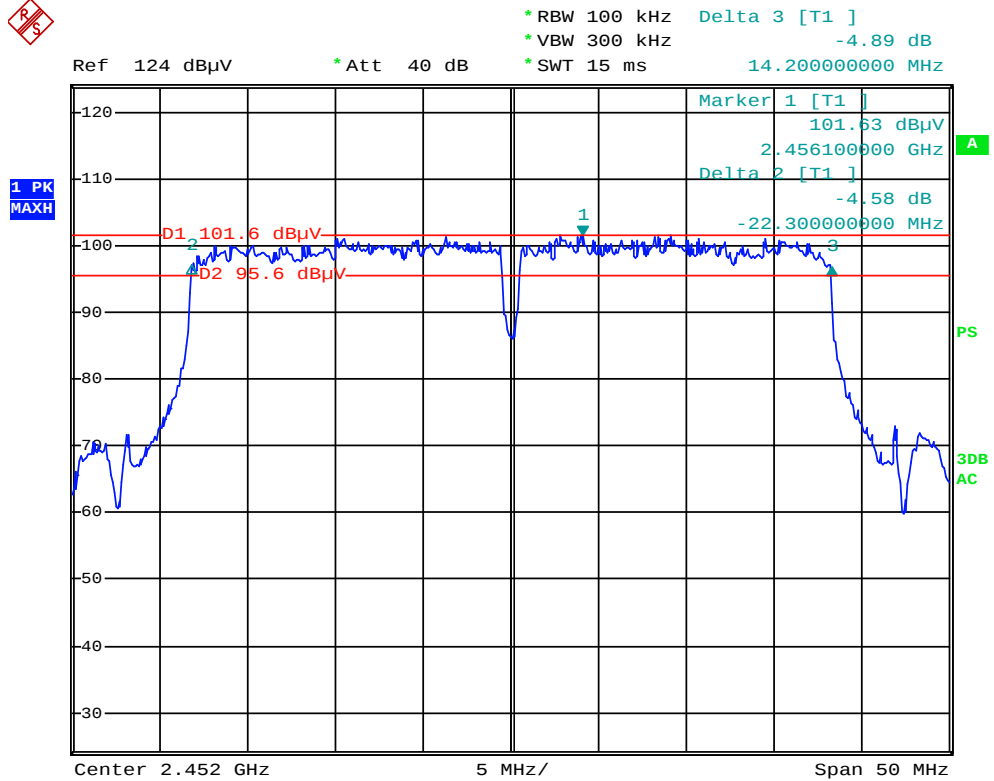


8. Test of Conducted Spurious Emission

8.1 Applicable Standard

Refer to FCC §15.247 (d).

Output power was measured based on the use of RMS averaging over a time interval, therefore the required attenuation is 30 dB.

8.2 EUT Setup

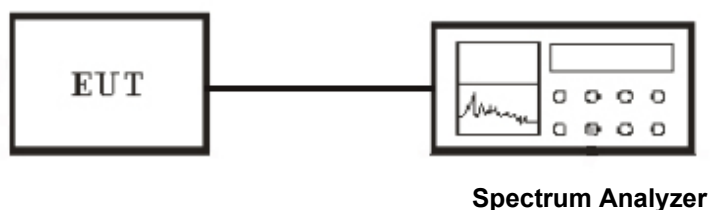

8.3 Test Equipment List and Details

See section 2.5.

8.4 Test Procedure

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

The spectrum from 30 MHz to 26.5 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

8.5 Test Result

Temperature (°C) : 22~23	EUT: WIFI MODULE
Humidity (%RH) : 50~54	M/N: FN-8110M
Barometric Pressure (mbar) : 950~1000	Operation Condition: TX Mode

IEEE 802.11b mode**CH Low**

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pass/Fail
2412.6535	111.27	N/A	N/A	
1197.014	53.33	91.27	-37.94	PASS
4910.2404	54.67	91.27	-36.60	PASS
6979.038	57.24	91.27	-34.03	PASS

CH Mid

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pass/Fail
2437.1524	111.60	N/A	N/A	
1462.2444	54.37	91.60	-37.23	PASS
4857.1943	56.52	91.60	-35.07	PASS
6819.8998	53.21	91.60	-38.39	PASS

CH High

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pass/Fail
2462.5352	111.84	N/A	N/A	
1303.1062	52.63	91.84	-39.21	PASS
5493.7474	55.72	91.84	-36.12	PASS
6766.8537	57.09	91.84	-34.75	PASS

IEEE 802.11g mode**CH Low**

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pass/Fail
2412.6352	105.00	N/A	N/A	
1409.7984	52.17	85.00	-32.83	PASS
5865.0701	55.92	85.00	-29.08	PASS
6713.8076	57.07	85.00	-27.93	PASS

CH Mid

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pass/Fail
2436.9525	105.20	N/A	N/A	
1674.4288	53.14	85.50	-32.36	PASS
5546.7935	54.82	85.50	-30.68	PASS
6766.8537	57.23	85.50	-28.27	PASS

CH High

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pass/Fail
2461.5352	105.39	N/A	N/A	
1780.521	52.99	85.39	-32.40	PASS
6501.6232	57.27	85.39	-28.12	PASS
6979.038	57.15	85.39	-28.24	PASS

IEEE 802.11n HT20 mode**CH Low**

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pass/Fail
2411.8565	104.53	N/A	N/A	
1462.2444	53.82	84.53	-30.71	PASS
5440.7014	55.51	84.53	-29.02	PASS
6925.9919	57.92	84.53	-26.61	PASS

CH Mid

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pass/Fail
2437.5246	104.59	N/A	N/A	
1674.4288	53.03	84.59	-31.56	PASS
5546.7935	54.63	84.59	-29.96	PASS
6713.8076	57.56	84.59	-27.03	PASS

CH High

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pass/Fail
2462.5385	105.03	N/A	N/A	
1886.6132	52.29	85.03	-32.74	PASS
5546.7935	54.84	85.03	-30.19	PASS
6925.9919	57.81	85.03	-27.22	PASS

IEEE 802.11n HT40 mode**CH Low**

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pass/Fail
2422.8563	101.53	N/A	N/A	
1780.521	53.43	81.53	-28.10	PASS
6012.7248	56.25	81.53	-25.28	PASS
6861.4623	57.70	81.53	-23.83	PASS

CH Mid

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pass/Fail
2437.5263	102.16	N/A	N/A	
1037.8757	53.22	82.16	-28.94	PASS
4963.2865	54.92	82.16	-27.24	PASS
6660.7615	57.42	82.16	-24.74	PASS

CH High

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Margin (dB)	Pass/Fail
2452.6535	101.53	N/A	N/A	
1727.4749	52.71	81.53	-28.82	PASS
5599.8396	56.85	81.53	-24.68	PASS
6779.038	57.52	81.53	-24.01	PASS

9. Test of Radiated Spurious Emission

9.1 Radiated Spurious Emission

9.1.1 Limits

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3338	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e-g, Sections 15.231 and 15.241.

15.209 (b) In the emission table above, the tighter limit applies at the band edges.

9.1.2 EUT Setup

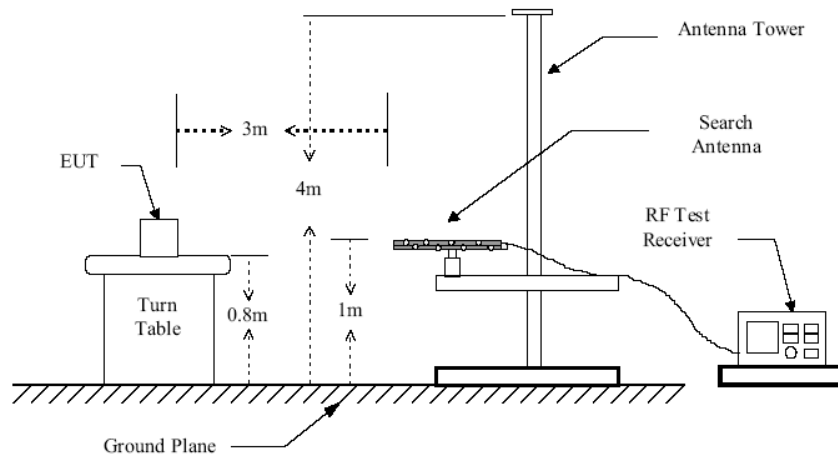


Figure 1 : Frequencies measured below 1 GHz configuration

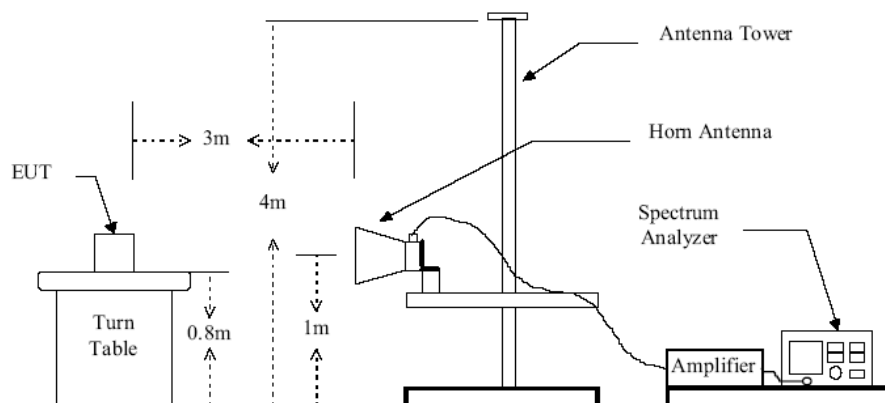


Figure 2 : Frequencies measured above 1 GHz configuration

9.1.3 Test Procedure

- a). The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b). While measuring the radiated emission below 1GHz, the EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. While measuring the radiated emission above 1GHz, the EUT was set 3 meters away from the interference-receiving antenna.
- c). The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
- d). For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e). The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f). If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE :

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

9.1.4 Test Result

Temperature (°C) : 22~23	EUT: WIFI MODULE
Humidity (%RH) : 50~54	M/N: FN-8110M
Barometric Pressure (mbar) : 950~1000	Operation Condition: ON & TX Mode

Note: In this testing, the EUT was respectively tested in three different orientations. That is:

- (1) EUT was lie vertically, and then its Antenna oriented upward
- (2) EUT was lie vertically, and then its Antenna oriented downward
- (3) EUT was lie flatwise, and then its Antenna oriented to the receiving antenna

The worst test data see following pages When the EUT was lie flatwise, and its Antenna oriented to the receiving antenna, the worst test data was got as following table.

WORST-CASE RADIATED EMISSION BELOW 1 GHz

Normal operating Mode:

Horizontal

Frequency	Meter Reading	Antenna Factor	Cable Loss	Emission Levels	Limits	Margin	Detector Mode
(MHz)	(dB μ V)	(dB/M)	(dB)	(dB μ V/M)	(dB μ V/M)	(dB)	PK/QP
84.32	26.40	7.97	1.18	36.56	40.00	-3.44	QP
160.01	16.50	12.60	1.59	30.69	43.50	-12.81	QP
402.48	14.50	14.44	2.72	36.66	46.00	-9.34	QP
652.74	14.50	18.00	3.05	35.55	46.00	-10.45	QP
726.46	9.60	20.84	3.84	34.28	46.00	-11.72	QP
823.46	10.30	21.80	4.14	36.24	46.00	-9.76	QP
N/A	----	----	----	----	----	----	----

Vertical

Frequency	Meter Reading	Antenna Factor	Cable Loss	Emission Levels	Limits	Margin	Detector Mode
(MHz)	(dB μ V)	(dB/M)	(dB)	(dB μ V/M)	(dB μ V/M)	(dB)	PK/QP
142.52	21.40	7.89	1.01	30.30	40.00	-9.70	QP
191.02	16.10	12.60	1.59	30.29	43.50	-13.21	QP
216.24	25.70	12.20	2.02	39.92	46.00	-6.08	QP
239.52	22.80	14.44	2.72	39.96	46.00	-6.04	QP
503.36	16.50	18.00	3.05	37.55	46.00	-8.45	QP
749.74	13.20	21.80	4.14	39.14	46.00	-6.86	QP
N/A	----	----	----	----	----	----	----

REMARK: Emission level (dB μ V/m) =Antenna Factor (dB/m) + Cable loss (dB) + Meter Reading (dB μ V).

TRANSMITTER RADIATED EMISSION ABOVE 1 GHz

IEEE 802.11b TX (CH Low)

Horizontal

TX / IEEE 802.11b mode / CH Low				Measurement Distance at 3m Horizontal polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4824.15	51.24	32.81	3.71	41.34	0.69	47.12	74.00	-26.88	P
4824.15	39.25	32.81	3.71	41.34	0.69	35.13	54.00	-18.87	A
7236.35	49.85	38.83	4.93	41.42	1.44	53.62	74.00	-20.38	P
7236.35	37.49	38.83	4.93	41.42	1.44	41.26	54.00	-12.74	A
9645.85	48.75	38.75	5.74	38.43	0.61	55.42	74.00	-18.58	P
9645.85	37.69	38.75	5.74	38.43	0.61	44.36	54.00	-9.64	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

Vertical

TX / IEEE 802.11b mode / CH Low				Measurement Distance at 3m Vertical polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4823.85	53.62	32.81	3.70	41.34	0.69	49.49	74.00	-24.51	P
4823.85	42.00	32.81	3.70	41.34	0.69	37.87	54.00	-16.13	A
7236.18	51.42	38.83	4.93	41.42	1.44	55.19	74.00	-18.81	P
7236.18	39.85	38.83	4.93	41.42	1.44	43.62	54.00	-10.38	A
9647.94	50.24	38.75	5.74	38.43	0.61	56.92	74.00	-17.08	P
9647.94	39.68	38.75	5.74	38.43	0.61	46.36	54.00	-7.64	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow: Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.

IEEE 802.11b TX (CH Middle)

Horizontal

				Measurement Distance at 3m Horizontal polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4876.53	51.28	32.93	3.73	41.41	0.71	47.24	74.00	-26.76	P
4876.53	41.96	32.93	3.73	41.41	0.71	37.92	54.00	-16.08	A
7309.41	50.24	38.93	4.96	41.32	1.59	54.40	74.00	-19.60	P
7309.41	39.42	38.93	4.96	41.32	1.59	43.58	54.00	-10.42	A
9747.83	49.85	38.85	5.75	38.24	0.55	56.76	74.00	-17.24	P
9747.83	38.65	38.85	5.75	38.24	0.55	45.56	54.00	-8.44	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

Vertical

TX / IEEE 802.11b mode / CH Middle				Measurement Distance at 3m Vertical polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4876.92	53.64	32.93	3.73	41.42	0.71	49.60	74.00	-24.40	P
4876.92	43.84	32.93	3.73	41.42	0.71	39.80	54.00	-14.20	A
7309.25	51.51	38.93	4.96	41.32	1.59	55.67	74.00	-18.33	P
7309.25	40.93	38.93	4.96	41.32	1.59	45.09	54.00	-8.91	A
9748.35	52.14	38.85	5.75	38.24	0.55	59.05	74.00	-14.95	P
9748.35	40.57	38.85	5.75	38.24	0.55	47.48	54.00	-6.52	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow: Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.

IEEE 802.11b TX (CH High)

Horizontal

TX / IEEE 802.11b mode / CH High				Measurement Distance at 3m Horizontal polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4923.85	52.46	33.03	3.76	41.49	0.73	48.50	74.00	-25.50	P
4923.85	42.11	33.03	3.76	41.49	0.73	38.15	54.00	-15.85	A
7385.69	51.24	39.04	4.99	41.21	1.76	55.82	74.00	-18.18	P
7385.69	39.51	39.04	4.99	41.21	1.76	44.09	54.00	-9.91	A
9848.15	50.24	38.95	5.76	38.06	0.49	57.39	74.00	-16.61	P
9848.15	38.96	38.95	5.76	38.06	0.49	46.10	54.00	-7.90	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

Vertical

TX / IEEE 802.11b mode / CH High				Measurement Distance at 3m Vertical polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4924.03	53.84	33.03	3.76	41.49	0.73	49.88	74.00	-24.12	P
4924.03	43.45	33.03	3.76	41.49	0.73	39.49	54.00	-14.51	A
7386.08	52.41	39.04	4.99	41.21	1.76	56.99	74.00	-17.01	P
7386.08	40.57	39.04	4.99	41.21	1.76	45.15	54.00	-8.85	A
9847.35	52.11	38.95	5.76	38.06	0.49	59.25	74.00	-14.75	P
9847.35	41.35	38.95	5.76	38.06	0.49	48.49	54.00	-5.51	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow: Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.

IEEE 802.11g TX (CH Low)

Horizontal

TX / IEEE 802.11g mode / CH Low				Measurement Distance at 3m Horizontal polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4824.23	52.12	32.81	3.71	41.34	0.69	48.00	74.00	-26.00	P
4824.23	42.11	32.81	3.71	41.34	0.69	37.99	54.00	-16.01	A
7236.00	51.24	38.83	4.93	41.42	1.44	55.01	74.00	-18.99	P
7236.00	40.35	38.83	4.93	41.42	1.44	44.12	54.00	-9.88	A
9642.15	50.22	38.74	5.74	38.44	0.61	56.88	74.00	-17.12	P
9642.15	38.95	38.74	5.74	38.44	0.61	45.61	54.00	-8.39	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

Vertical

TX / IEEE 802.11g mode / CH Low				Measurement Distance at 3m Vertical polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4824.00	54.24	32.81	3.70	41.34	0.69	50.11	74.00	-23.89	P
4824.00	43.97	32.81	3.70	41.34	0.69	39.84	54.00	-14.16	A
7236.39	51.62	38.83	4.93	41.42	1.44	55.39	74.00	-18.61	P
7236.39	41.52	38.83	4.93	41.42	1.44	45.29	54.00	-8.71	A
9641.57	52.21	38.74	5.74	38.44	0.62	58.87	74.00	-15.13	P
9641.57	41.25	38.74	5.74	38.44	0.62	47.91	54.00	-6.09	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow: Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.

IEEE 802.11g TX (CH Middle)

Horizontal

TX / IEEE 802.11g mode / CH Middle				Measurement Distance at 3m Horizontal polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4871.16	50.24	32.92	3.73	41.41	0.71	46.19	74.00	-27.81	P
4871.16	41.35	32.92	3.73	41.41	0.71	37.30	54.00	-16.70	A
7318.25	49.85	38.95	4.96	41.31	1.61	54.06	74.00	-19.94	P
7318.25	40.22	38.95	4.96	41.31	1.61	44.43	54.00	-9.57	A
9748.35	50.24	38.85	5.75	38.24	0.55	57.15	74.00	-16.85	P
9748.35	39.58	38.85	5.75	38.24	0.55	46.49	54.00	-7.51	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

Vertical

TX / IEEE 802.11g mode / CH Middle				Measurement Distance at 3m Vertical polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4871.56	53.62	32.92	3.73	41.41	0.71	49.57	74.00	-24.43	P
4871.56	44.17	32.92	3.73	41.41	0.71	40.12	54.00	-13.88	A
7317.24	51.24	38.94	4.96	41.31	1.61	55.45	74.00	-18.55	P
7317.24	42.33	38.94	4.96	41.31	1.61	46.54	54.00	-7.46	A
9747.26	52.34	38.85	5.75	38.25	0.55	59.25	74.00	-14.75	P
9747.26	41.52	38.85	5.75	38.25	0.55	48.43	54.00	-5.57	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow: Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.

IEEE 802.11g TX (CH High)

Horizontal

TX / IEEE 802.11g mode / CH High				Measurement Distance at 3m Horizontal polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4924.35	51.24	33.03	3.76	41.49	0.73	47.28	74.00	-26.72	P
4924.35	40.26	33.03	3.76	41.49	0.73	36.30	54.00	-17.70	A
7384.86	49.87	39.04	4.99	41.21	1.75	54.44	74.00	-19.56	P
7384.86	38.65	39.04	4.99	41.21	1.75	43.22	54.00	-10.78	A
9847.56	50.14	38.95	5.76	38.06	0.49	57.28	74.00	-16.72	P
9847.56	39.85	38.95	5.76	38.06	0.49	46.99	54.00	-7.01	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

Vertical

TX / IEEE 802.11g mode / CH High				Measurement Distance at 3m Vertical polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4923.85	53.22	33.03	3.76	41.49	0.73	49.26	74.00	-24.74	P
4923.85	42.61	33.03	3.76	41.49	0.73	38.65	54.00	-15.35	A
7385.94	51.33	39.04	4.99	41.21	1.76	55.91	74.00	-18.09	P
7385.94	40.25	39.04	4.99	41.21	1.76	44.83	54.00	-9.17	A
9847.59	52.64	38.95	5.76	38.06	0.49	59.78	74.00	-14.22	P
9847.59	41.24	38.95	5.76	38.06	0.49	48.38	54.00	-5.62	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow: Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.

IEEE 802.11n HT20 TX (CH Low)

Horizontal

TX / IEEE 802.11n HT20 mode / CH Low				Measurement Distance at 3m Horizontal polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4824.35	50.24	32.81	3.71	41.34	0.69	46.12	74.00	-27.88	P
4824.35	38.95	32.81	3.71	41.34	0.69	34.83	54.00	-19.17	A
7235.86	51.22	38.83	4.93	41.43	1.43	54.99	74.00	-19.01	P
7235.86	38.97	38.83	4.93	41.43	1.43	42.74	54.00	-11.26	A
9648.35	50.22	38.75	5.74	38.43	0.61	56.90	74.00	-17.10	P
9648.35	38.64	38.75	5.74	38.43	0.61	45.32	54.00	-8.68	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

Vertical

TX / IEEE 802.11n HT20 mode / CH Low				Measurement Distance at 3m Vertical polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4823.59	52.64	32.81	3.70	41.34	0.69	48.51	74.00	-25.49	P
4823.59	41.25	32.81	3.70	41.34	0.69	37.12	54.00	-16.88	A
7236.24	53.26	38.83	4.93	41.42	1.44	57.03	74.00	-16.97	P
7236.24	41.25	38.83	4.93	41.42	1.44	45.02	54.00	-8.98	A
9647.15	52.14	38.75	5.74	38.43	0.61	58.81	74.00	-15.19	P
9647.15	40.36	38.75	5.74	38.43	0.61	47.03	54.00	-6.97	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow: Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.

IEEE 802.11n HT20 TX (CH Middle)

Horizontal

TX / IEEE 802.11n HT20 mode / CH Middle				Measurement Distance at 3m Horizontal polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4872.69	50.24	32.92	3.73	41.41	0.71	46.19	74.00	-27.81	P
4872.69	40.36	32.92	3.73	41.41	0.71	36.31	54.00	-17.69	A
7311.54	49.87	38.94	4.96	41.32	1.60	54.05	74.00	-19.95	P
7311.54	38.65	38.94	4.96	41.32	1.60	42.83	54.00	-11.17	A
9748.27	50.24	38.85	5.75	38.24	0.55	57.15	74.00	-16.85	P
9748.27	39.85	38.85	5.75	38.24	0.55	46.76	54.00	-7.24	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

Vertical

TX / IEEE 802.11n HT20 mode / CH Middle				Measurement Distance at 3m Vertical polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4873.26	52.14	32.92	3.73	41.41	0.71	48.09	74.00	-25.91	P
4873.26	42.33	32.92	3.73	41.41	0.71	38.28	54.00	-15.72	A
7312.25	51.84	38.94	4.96	41.32	1.60	56.02	74.00	-17.98	P
7312.25	40.25	38.94	4.96	41.32	1.60	44.43	54.00	-9.57	A
9748.65	51.68	38.85	5.75	38.24	0.55	58.59	74.00	-15.41	P
9748.65	41.25	38.85	5.75	38.24	0.55	48.16	54.00	-5.84	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow: Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.

IEEE 802.11n HT20 TX (CH High)

Horizontal

TX / IEEE 802.11n HT20 mode / CH High				Measurement Distance at 3m Horizontal polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4923.85	51.14	33.03	3.76	41.49	0.73	47.18	74.00	-26.82	P
4923.85	40.35	33.03	3.76	41.49	0.73	36.39	54.00	-17.61	A
7386.54	50.28	39.04	4.99	41.21	1.76	54.86	74.00	-19.14	P
7386.54	39.48	39.04	4.99	41.21	1.76	44.06	54.00	-9.94	A
9849.33	49.87	38.95	5.76	38.06	0.49	57.02	74.00	-16.98	P
9849.33	39.65	38.95	5.76	38.06	0.49	46.80	54.00	-7.20	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

Vertical

TX / IEEE 802.11n HT20 mode / CH High				Measurement Distance at 3m Vertical polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4923.16	53.26	33.03	3.76	41.48	0.73	49.30	74.00	-24.70	P
4923.16	42.17	33.03	3.76	41.48	0.73	38.21	54.00	-15.79	A
7385.46	52.86	39.04	4.99	41.21	1.75	57.43	74.00	-16.57	P
7385.46	41.33	39.04	4.99	41.21	1.75	45.90	54.00	-8.10	A
9849.17	52.34	38.95	5.76	38.06	0.49	59.49	74.00	-14.51	P
9849.17	42.65	38.95	5.76	38.06	0.49	49.80	54.00	-4.20	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow: Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.

IEEE 802.11n HT40 TX (CH Low)

Horizontal

TX / IEEE 802.11n HT40 mode / CH Low				Measurement Distance at 3m Horizontal polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4843.16	50.24	32.85	3.72	41.36	0.70	46.15	74.00	-27.85	P
4843.16	39.86	32.85	3.72	41.36	0.70	35.77	54.00	-18.23	A
7264.86	49.87	38.87	4.94	41.38	1.50	53.79	74.00	-20.21	P
7264.86	38.56	38.87	4.94	41.38	1.50	42.48	54.00	-11.52	A
9687.35	50.24	38.79	5.75	38.36	0.59	57.01	74.00	-16.99	P
9687.35	38.97	38.79	5.75	38.36	0.59	45.74	54.00	-8.26	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

Vertical

TX / IEEE 802.11n HT40 mode / CH Low				Measurement Distance at 3m Vertical polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4844.65	52.64	32.86	3.72	41.37	0.70	48.55	74.00	-25.45	P
4844.65	41.35	32.86	3.72	41.37	0.70	37.26	54.00	-16.74	A
7265.14	51.24	38.87	4.94	41.38	1.50	55.17	74.00	-18.83	P
7265.14	40.33	38.87	4.94	41.38	1.50	44.26	54.00	-9.74	A
9686.35	53.26	38.79	5.75	38.36	0.59	60.03	74.00	-13.97	P
9686.35	41.57	38.79	5.75	38.36	0.59	48.34	54.00	-5.66	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow: Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.

IEEE 802.11n HT40 TX (CH Middle)

Horizontal

TX / IEEE 802.11n HT40 mode / CH Middle				Measurement Distance at 3m Horizontal polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4873.26	51.24	32.92	3.73	41.41	0.71	47.19	74.00	-26.81	P
4873.26	38.59	32.92	3.73	41.41	0.71	34.54	54.00	-19.46	A
7312.19	50.24	38.94	4.96	41.32	1.60	54.42	74.00	-19.58	P
7312.19	40.16	38.94	4.96	41.32	1.60	44.34	54.00	-9.66	A
9747.85	49.87	38.85	5.75	38.24	0.55	56.78	74.00	-17.22	P
9747.85	38.97	38.85	5.75	38.24	0.55	45.88	54.00	-8.12	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

Vertical

TX / IEEE 802.11n HT40 mode / CH Middle				Measurement Distance at 3m Vertical polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4874.59	53.26	32.92	3.73	41.41	0.71	49.22	74.00	-24.78	P
4874.59	41.14	32.92	3.73	41.41	0.71	37.10	54.00	-16.90	A
7312.24	52.87	38.94	4.96	41.32	1.60	57.05	74.00	-16.95	P
7312.24	42.33	38.94	4.96	41.32	1.60	46.51	54.00	-7.49	A
9747.16	51.24	38.85	5.75	38.25	0.55	58.15	74.00	-15.85	P
9747.16	40.16	38.85	5.75	38.25	0.55	47.07	54.00	-6.93	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow: Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit

IEEE 802.11n HT40 TX (CH High)

Horizontal

TX / IEEE 802.11n HT40 mode / CH High				Measurement Distance at 3m Horizontal polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4903.26	50.14	32.99	3.75	41.45	0.72	46.14	74.00	-27.86	P
4903.26	39.87	32.99	3.75	41.45	0.72	35.87	54.00	-18.13	A
7354.89	51.24	39.00	4.98	41.26	1.69	55.65	74.00	-18.35	P
7354.89	38.59	39.00	4.98	41.26	1.69	43.00	54.00	-11.00	A
9808.35	50.24	38.91	5.76	38.13	0.51	57.29	74.00	-16.71	P
9808.35	39.87	38.91	5.76	38.13	0.51	46.92	54.00	-7.08	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

Vertical

TX / IEEE 802.11n HT40 mode / CH High				Measurement Distance at 3m Vertical polarity					
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	(P/Q/A)
4904.15	52.47	32.99	3.75	41.46	0.72	48.47	74.00	-25.53	P
4904.15	41.24	32.99	3.75	41.46	0.72	37.24	54.00	-16.76	A
7353.65	53.25	39.00	4.98	41.26	1.69	57.65	74.00	-16.35	P
7353.65	40.15	39.00	4.98	41.26	1.69	44.55	54.00	-9.45	A
9808.15	52.14	38.91	5.76	38.13	0.52	59.19	74.00	-14.81	P
9808.15	41.25	38.91	5.76	38.13	0.52	48.30	54.00	-5.70	A
N/A	----	----	----	----	----	----	----	----	P
N/A	----	----	----	----	----	----	----	----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow: Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit

9.2 RESTRICTED BAND EDGES

TEST RESULT

IEEE 802.11b mode

Channel	Freq.(MHz)	Level(dBuV)	Limit(dBuV)	Margin(dB)	Detector
	2390	51.50	74	-22.50	Peak
LOW	2390	48.81	54	-5.19	Average
	2483.5	54.08	74	-19.92	Peak
HIGH	2483.5	49.85	54	-4.15	Average

IEEE 802.11g mode

Channel	Freq.(MHz)	Level(dBuV)	Limit(dBuV)	Margin(dB)	Detector
	2390	53.48	74	-20.52	Peak
LOW	2390	47.45	54	-6.55	Average
	2483.5	53.71	74	-20.29	Peak
HIGH	2483.5	49.10	54	-4.9	Average


IEEE 802.11n HT20 mode

Channel	Freq.(MHz)	Level(dBuV)	Limit(dBuV)	Margin(dB)	Detector
	2390	52.51	74	-21.49	Peak
LOW	2390	49.94	54	-4.06	Average
	2483.5	52.84	74	-21.16	Peak
HIGH	2483.5	48.80	54	-5.2	Average


IEEE 802.11n HT40 mode

Channel	Freq.(MHz)	Level(dBuV)	Limit(dBuV)	Margin(dB)	Detector
	2390	55.03	74	-18.97	Peak
LOW	2390	49.88	54	-4.12	Average
	2483.5	55.85	74	-18.15	Peak
HIGH	2483.5	48.16	54	-5.84	Average


CH Low (802.11b MODE-Peak)

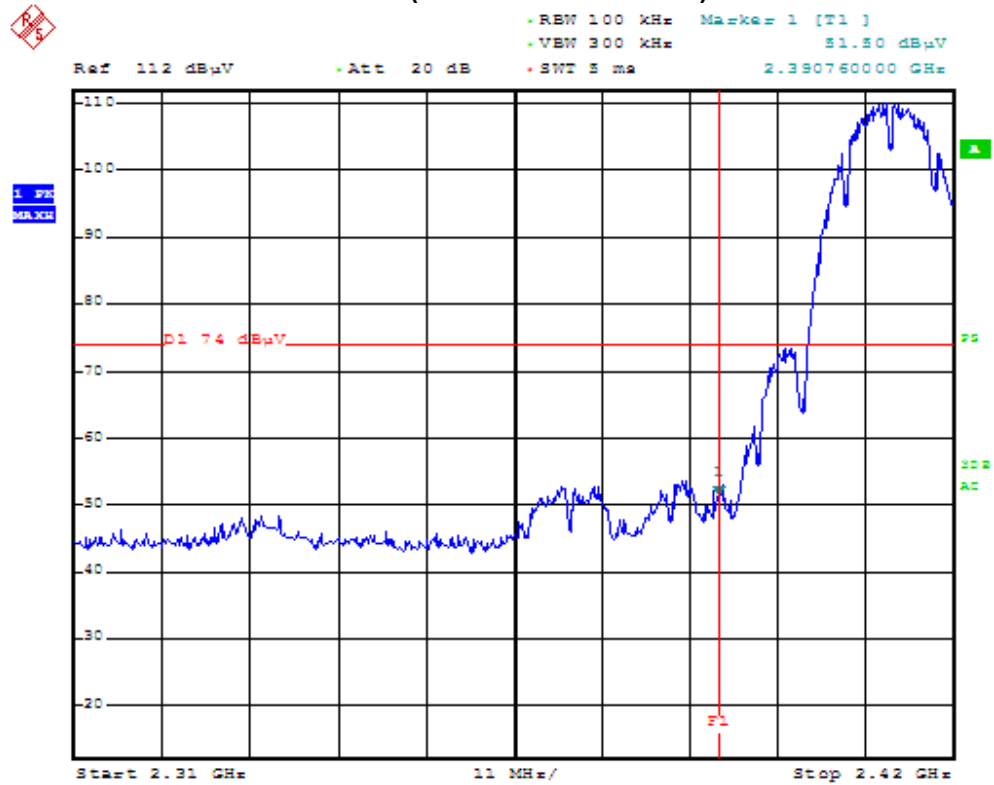


CH Low (802.11b MODE-Average)

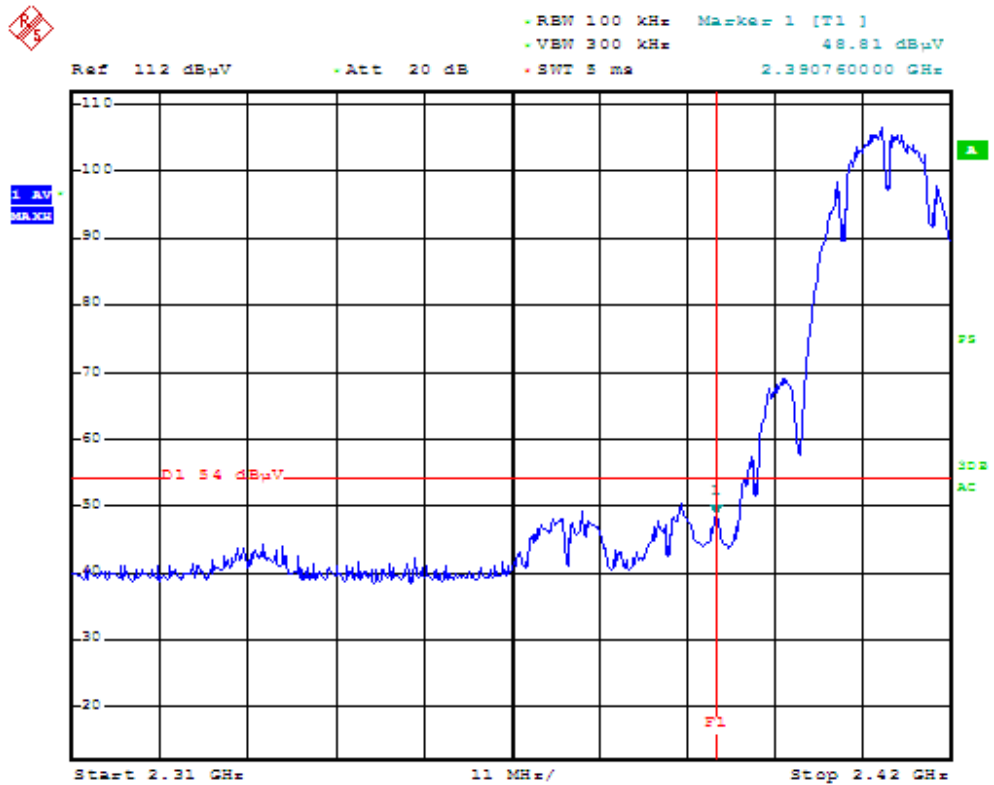


CH High (802.11b MODE-Peak)

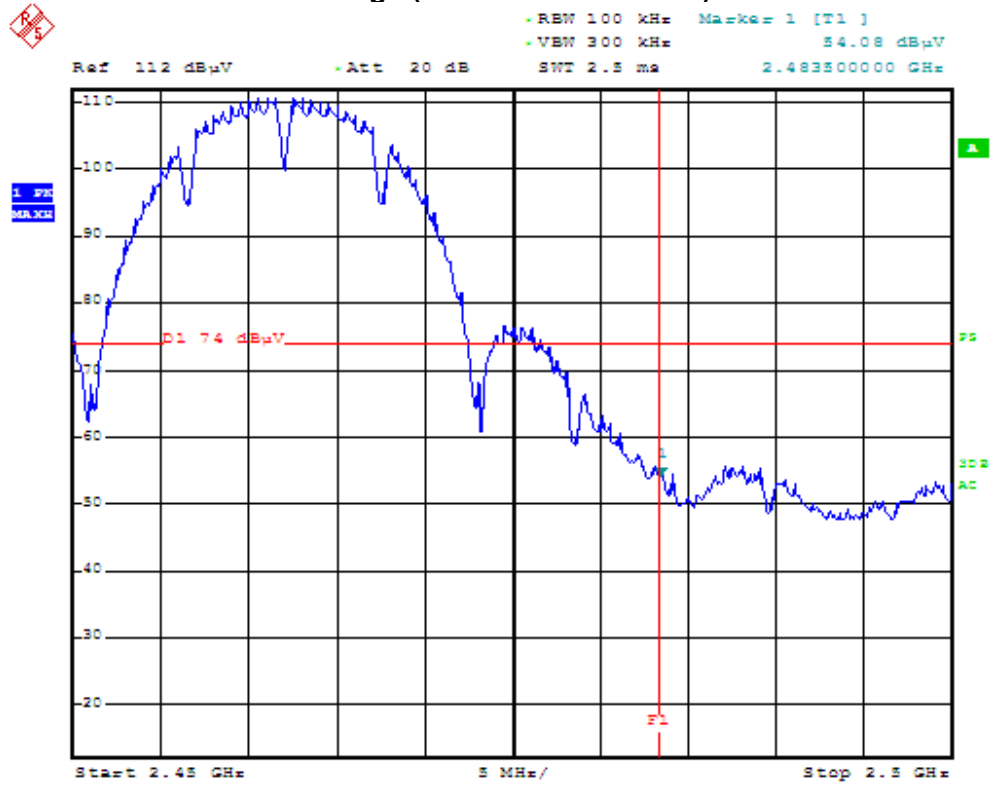


CH High (802.11b MODE-Average)

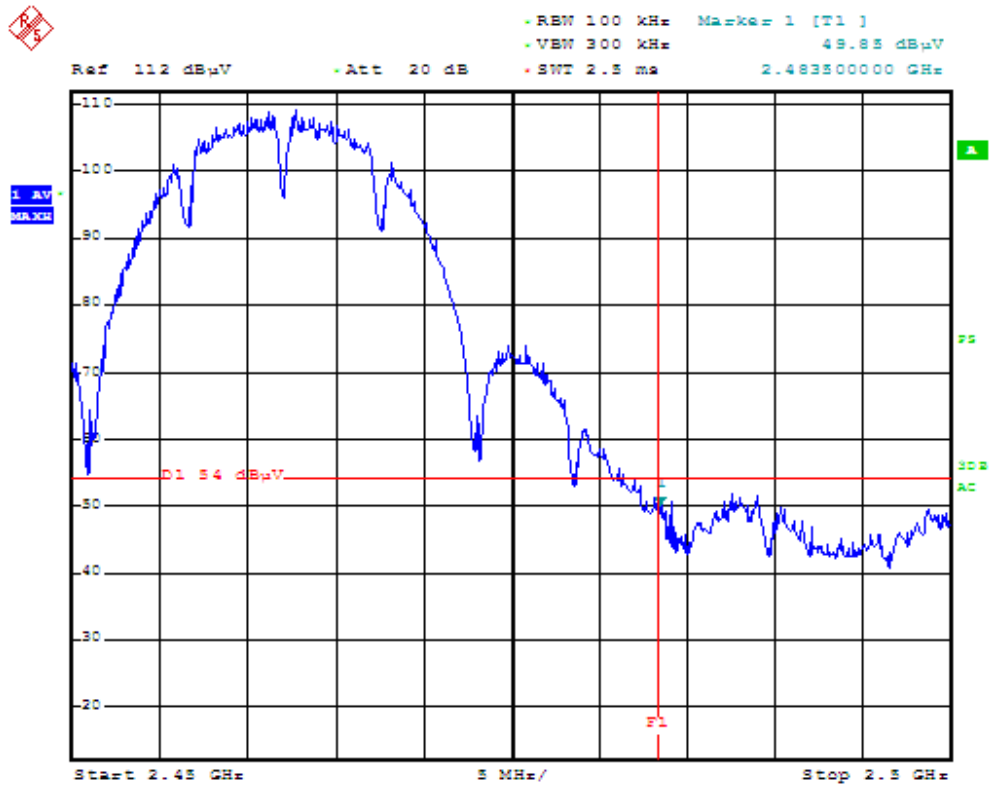


CH Low (802.11g MODE=Peak)

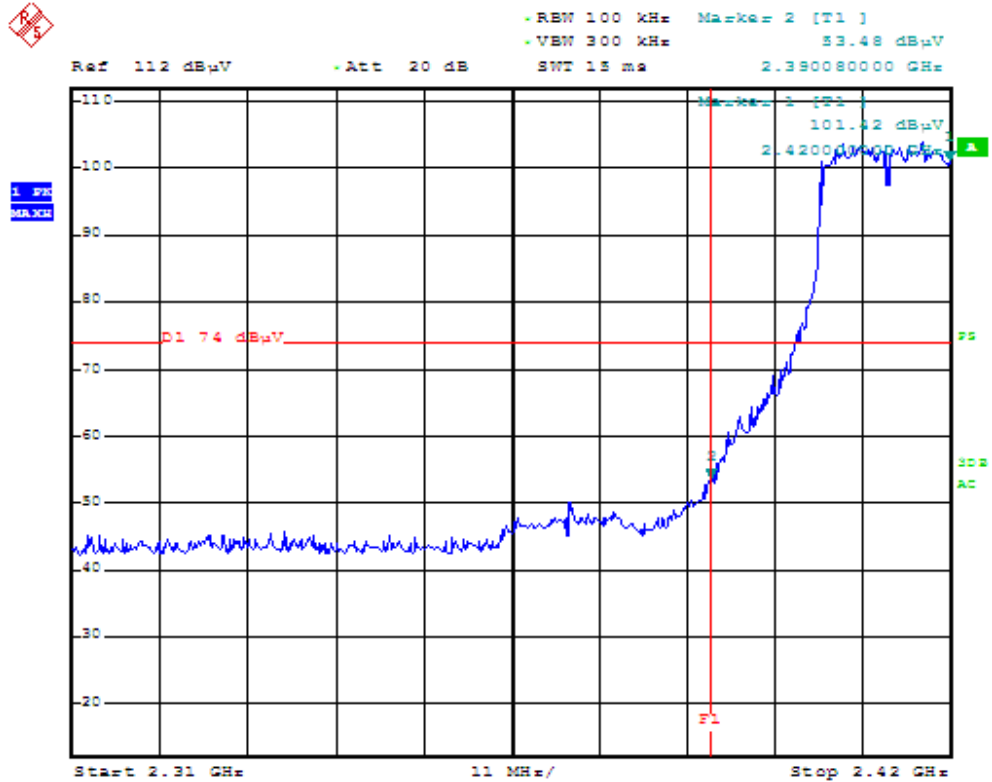


CH Low (802.11g MODE=Average)

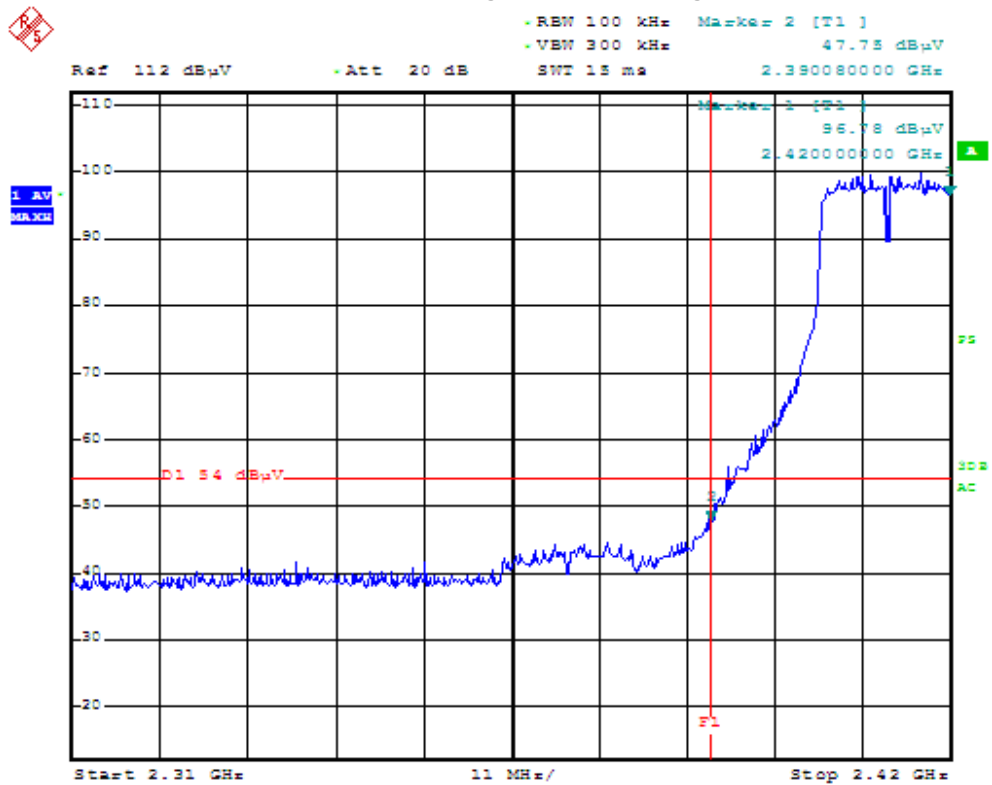


CH High (802.11g MODE-Peak)

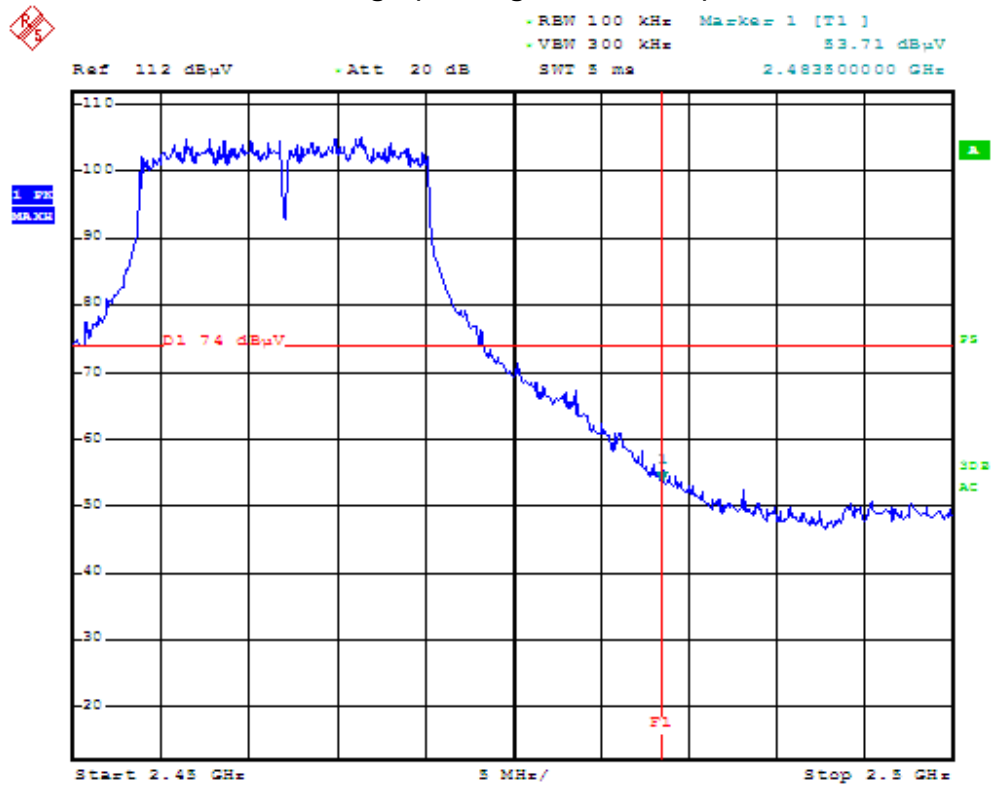


CH High (802.11g MODE-Average)

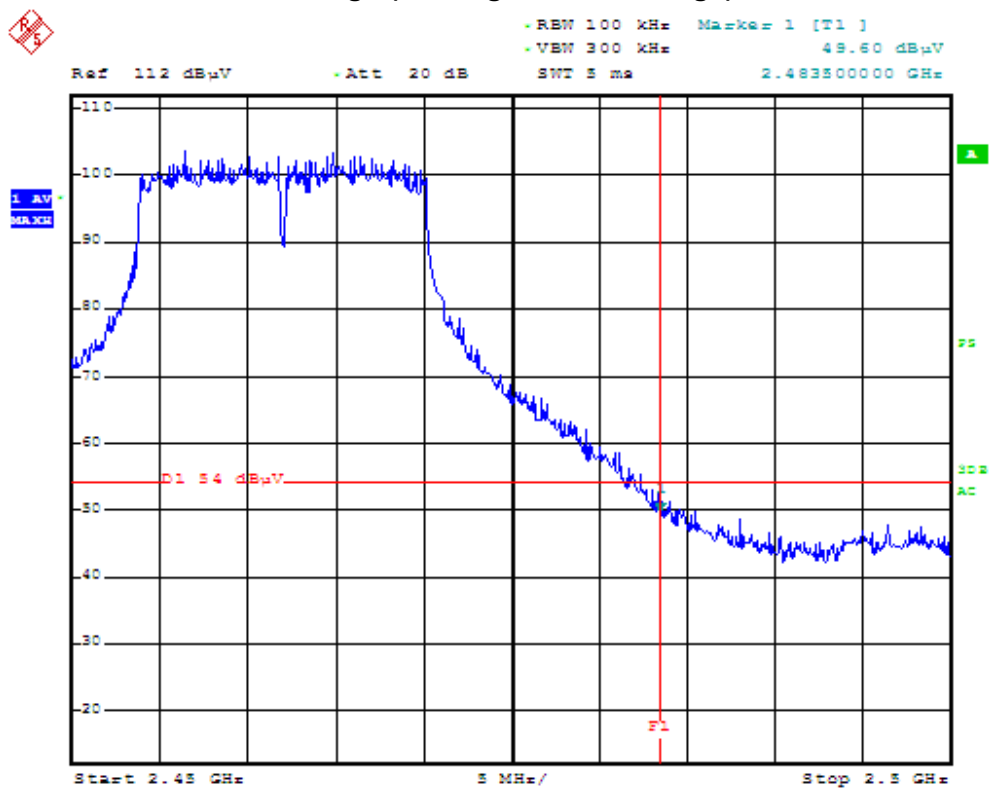


CH Low (802.11n HT20 MODE-Peak)

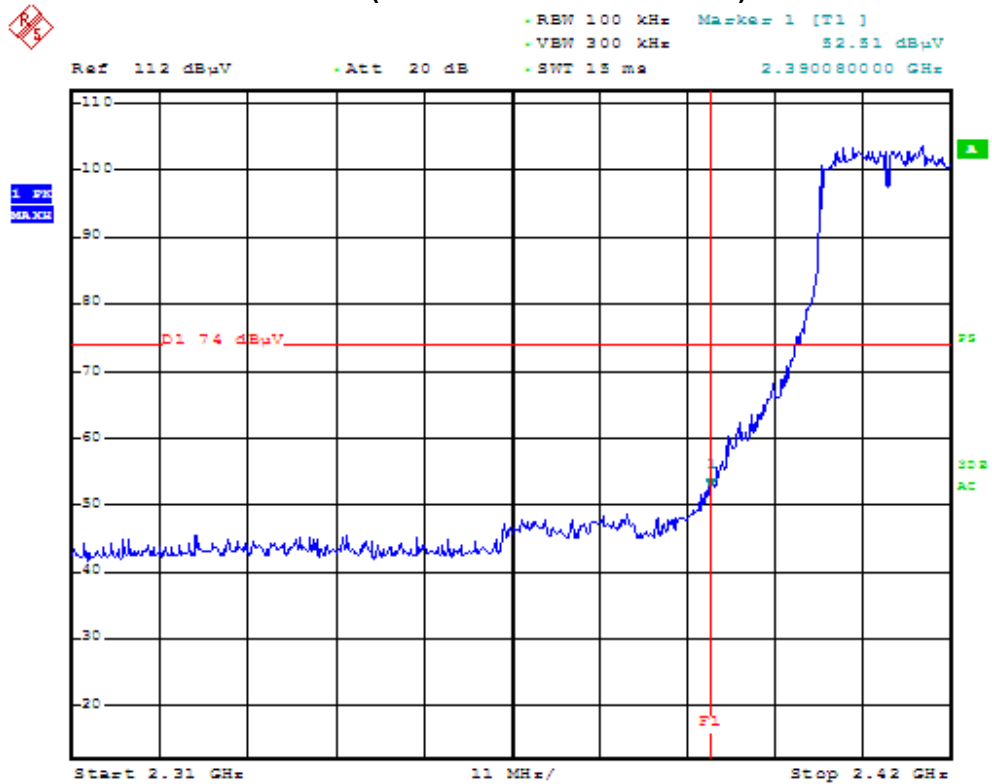


CH Low (802.11n HT20 MODE-Average)

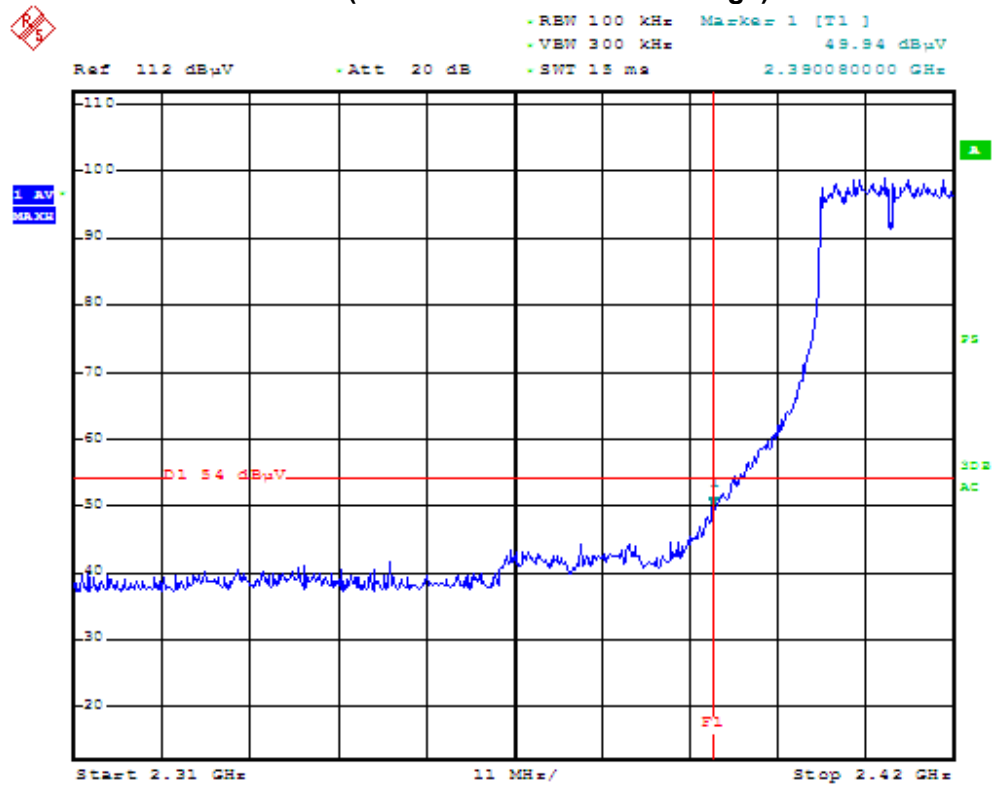


CH High (802.11n HT20 MODE-Peak)

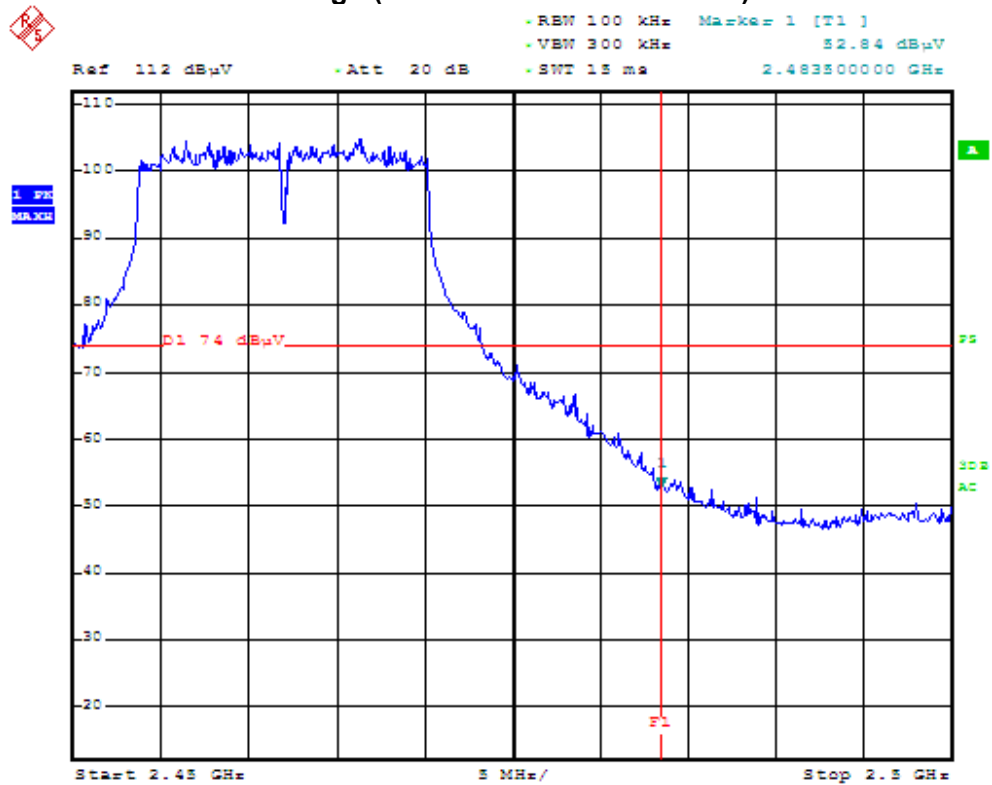


CH High (802.11n HT20 MODE-Average)

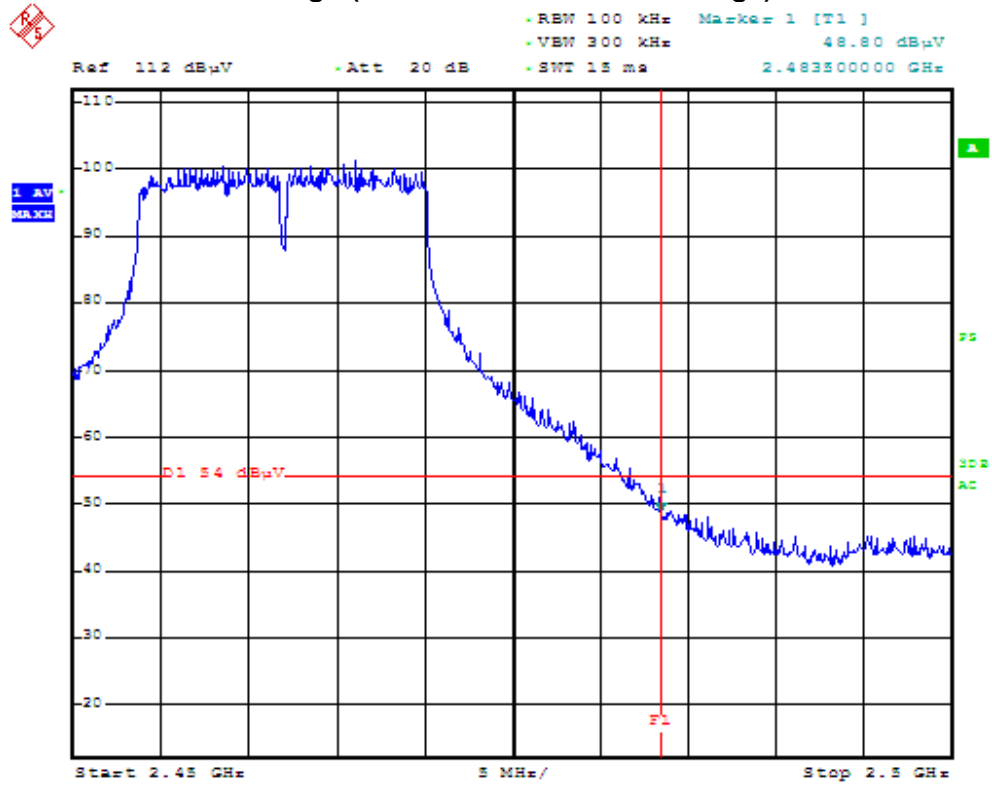


CH Low (802.11n HT40 MODE-Peak)

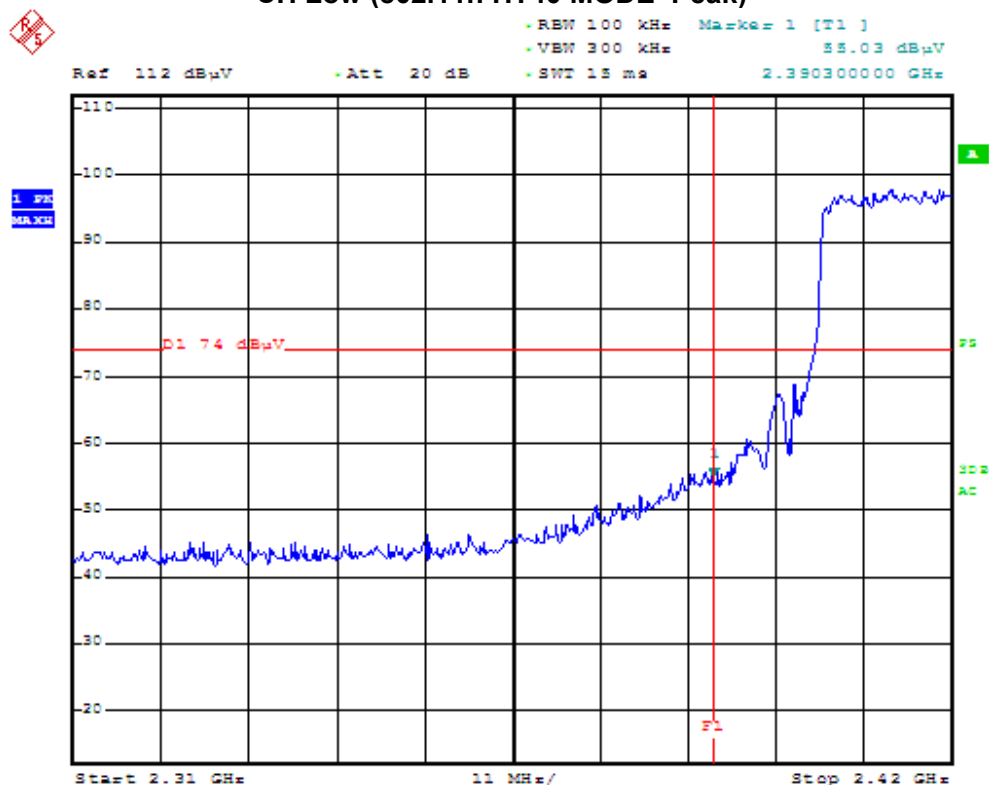


CH Low (802.11n HT40 MODE-Average)

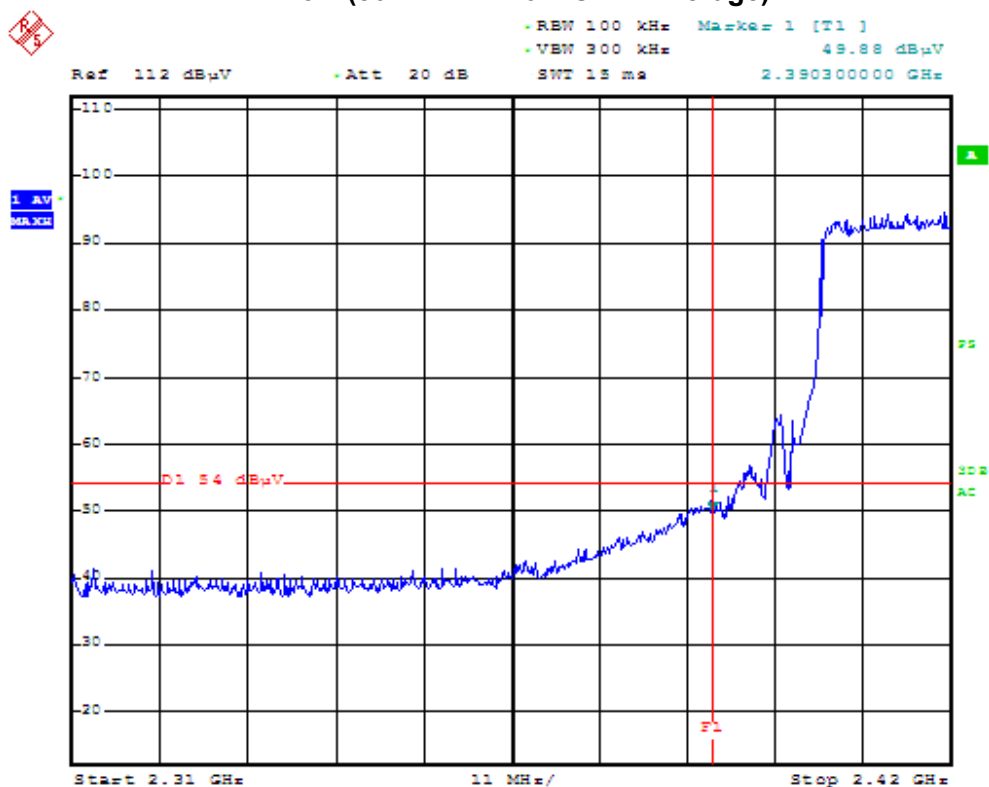

CH High (802.11n HT40 MODE-Peak)

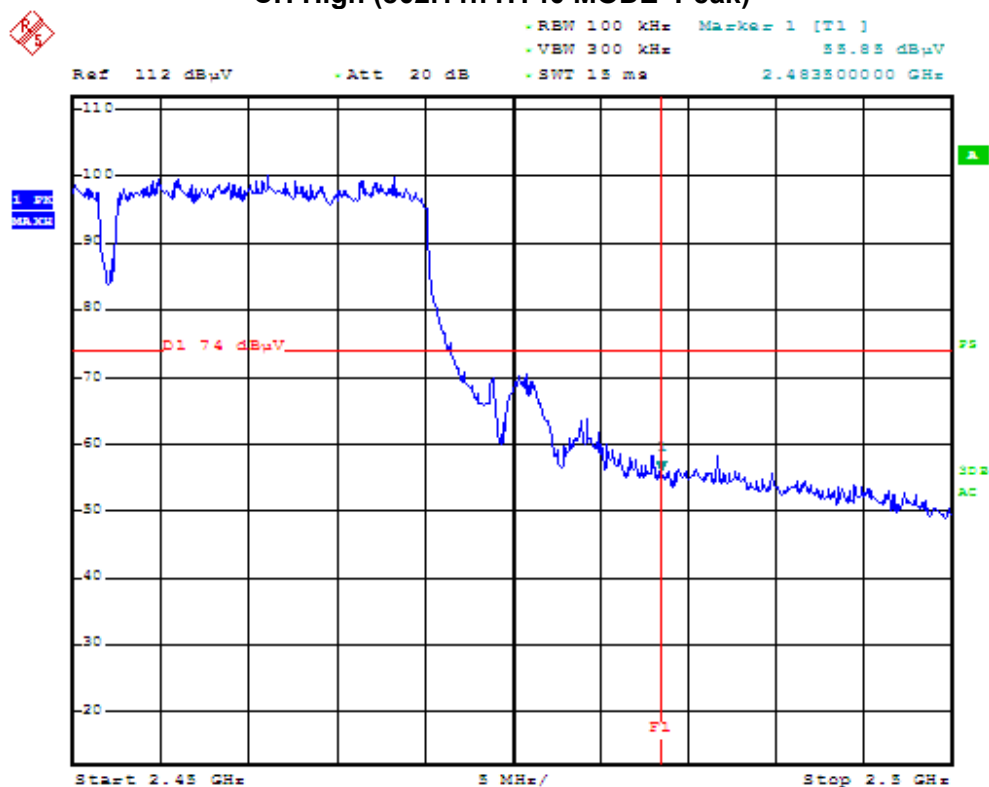

CH High (802.11n HT40 MODE-Average)

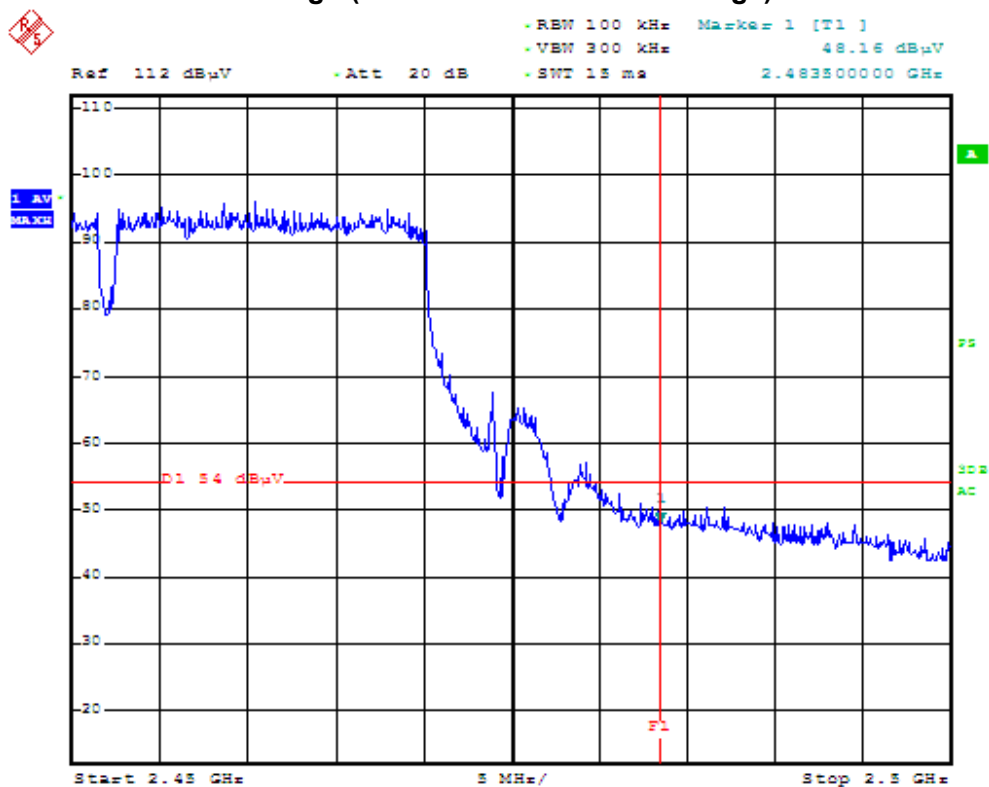

10. ANTENNA REQUIREMENT

10.1 Standard Applicable

Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Section 15.247(b)/(c):

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


If the intentional radiator is used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

10.2 Antenna Connected Construction

The antenna connector is designed with permanent attachment and no consideration of replacement.


APPENDIX A – EUT EXTERNAL PHOTOGRAPHS

EUT –Front View

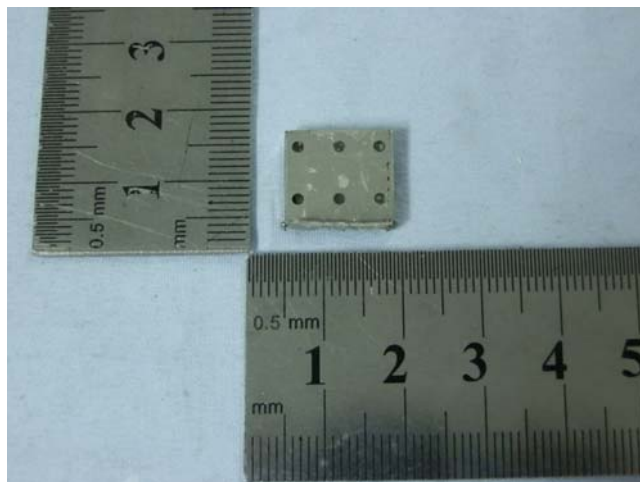


APPENDIX B – EUT INTERNAL PHOTOGRAPHS

EUT –PCB View

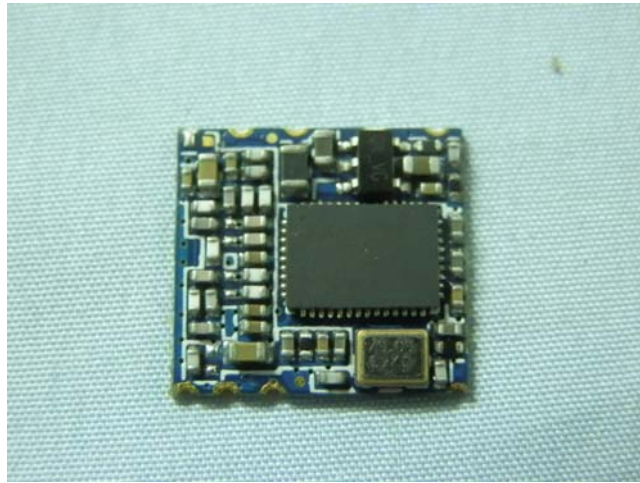

APPENDIX C - TEST SETUP PHOTOGRAPHS

Radiated Emission

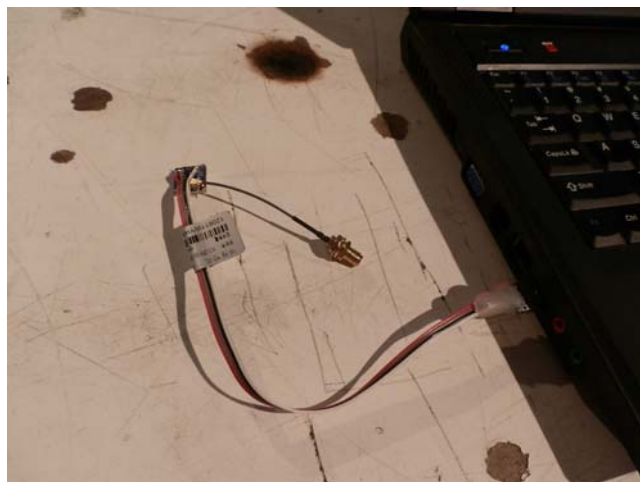

APPENDIX D – BONTEK ACCREDITATION CERTIFICATES

 
China National Accreditation Service for Conformity Assessment
LABORATORY ACCREDITATION CERTIFICATE
(Registration No. CNAS L3923)
Shenzhen Bontek Compliance Testing Laboratory Co., Ltd.
<u>1/F., Block East H-3, OCT Eastern Ind. Zone, the 1st Road,</u>
<u>Xiangshan East Street, Nanshan District, Shenzhen, Guangdong, China</u>
<i>is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories(CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence of testing.</i>
<i>The scope of accreditation is detailed in the attached appendices bearing the same registration number as above. The appendices form an integral part of this certificate.</i>
Date of Issue: 2012-03-22
Date of Expiry: 2015-03-21
Date of Initial Accreditation: 2009-02-27
Date of Update: 2012-03-22

Signed on behalf of China National Accreditation Service for Conformity Assessment
China National Accreditation Service for Conformity Assessment (CNAS) is authorized by Certification and Accreditation Administration of the People's Republic of China (CNCA) to operate the national accreditation schemes for conformity assessment. CNAS is the signatory to International Laboratory Accreditation Cooperation Multilateral Recognition Arrangement (ILAC MRA) and Asia Pacific Laboratory Accreditation Cooperation Multilateral Recognition Arrangement (APLAC MRA).
No.CNAS AL 2
0003595



Certificate

of

Appointment

No. UA 50203122-0001

The Applicant

**Bontek Compliance Testing
Laboratory Ltd**
1/F, Block East H-3, OCT Eastern
Industrial Zone, Qiaocheng East Rd.
Nanshan, Shenzhen, Guangdong
P.R. China

has been authorized to carry out EMC tests
by order and under supervision of TÜV Rheinland according to .

EN55011, EN55012, EN55013, EN55014-1, EN55014-2, EN55015, EN55020
CISPR11, CISPR12, CISPR13, CISPR14-1, CISPR14-2, CISPR15, EN55022
EN55024, EN55025, CISPR20, CISPR22, CISPR24, CISPR25
EN/IEC61000-3-2/-3, EN/IEC61000-4-2/-4/-5/-6/-8/-11
EN/IEC61547, EN/IEC62040-2, EN/IEC61000-6-1
EN/IEC61000-6-2, EN/IEC61000-6-3, EN/IEC61000-6-4
EN/IEC60601-1-2, EN/IEC61326-1, EN/IEC61326-x(x=2,3,4, or 5)

An assessment of the laboratory was conducted according to the "Procedures and
Conditions for Appointments of EMC Test Laboratories" with reference to
EN ISO/IEC 17025 by a TÜV Rheinland auditor.

Audit Report No. 17010783-002

This certificate is valid until the next scheduled audit or up to 18 months,
at the discretion of TÜV Rheinland.

Date of issue: 06.05.2011

TÜV Rheinland/CCIC (Qingdao) Co., Ltd.
18 Hong Kong Middle Road, Qingdao 266071, P.R.China
Tel: +86-532-8578-1778
Fax: +86-532-8578-1079 <http://www.chn.tuv.com>

Certification Body


Shawn Peng



FEDERAL COMMUNICATIONS COMMISSION

**Laboratory Division
7435 Oakland Mills Road
Columbia, MD 21046**

March 03, 2011

Registration Number: 338263

Bontek Compliance Testing Laboratory Ltd
1/F, Block East H-3, OCT Eastern Ind. Zone,
Qiaocheng East Road, Nanshan,
Shenzhen,
China

Attention: Tony Wu, General Manager

Re: Measurement facility located at Hua Qiao Cheng East Ind. Area, Shenzhen, China
Anechoic chamber (3 meter)
Date of Renewal: March 03, 2011

Dear Sir or Madam:

Your request for renewal of the registration of the subject measurement facility has been received. The information submitted has been placed in your file and the registration has been renewed. The name of your organization will remain on the list of facilities whose measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that the file must be updated for any changes made to the facility and the registration must be renewed at least every three years.

Measurement facilities that have indicated that they are available to the public to perform measurement services on a fee basis may be found on the FCC website www.fcc.gov under E-Filing, OET Equipment Authorization Electronic Filing, Test Firms.

Sincerely,



Phyllis Parrish
Industry Analyst