



FCC CFR47 CERTIFICATION

PART 24E

TEST REPORT

FOR

PICO 1900 BASESTATION

MODEL: WAVE 2000 PICO BS PLUS

FCC ID: OEW-AGBBP1

REPORT NUMBER: 03U2268-1

ISSUE DATE: SEPTEMBER 30, 2003

Prepared for
**INTERWAVE COMMUNICATIONS
2495 LEGHORN STREET
MOUNTAIN VIEW, CA 94043
USA**

Prepared by
**COMPLIANCE CERTIFICATION SERVICES
561F MONTEREY ROAD, ROUTE 2
MORGAN HILL, CA 95037, USA
TEL: (408) 463-0885
FAX: (408) 463-0888**



TABLE OF CONTENT

1.	TEST RESULT CERTIFICATION	3
2.	EUT DESCRIPTION	4
3.	ENGINEERING JUSTIFICATION	4
4.	TEST METHODOLOGY	4
5.	TEST FACILITY	4
6.	ACCREDITATION AND LISTING	4
7.	MEASURING INSTRUMENT CALIBRATION	4
8.	TEST SETUP, PROCEDURE AND RESULT	5
8.1.	SECTION 2.1046: RF POWER OUTPUT	5
8.2.	SECTION 2.1047: MODULATION CHARACTERISTICS	14
8.3.	SECTION 2.1049: EMISSION MASK & OCCUPIED BANDWIDTH	14
8.4.	SECTION 2.1051: SPURIOUS EMISSION AT ANTENNA TERMINAL	19
8.5.	SECTION 2.1053: FIELD STRENGTH OF SPURIOUS RADIATION	25
8.6.	SECTION 2.1055: FREQUENCY STABILITY	29
8.7.	RADIATED EMISSION	33
8.8.	POWERLINE CONDUCTED EMISSION	39
9.	APENDIX	45
9.1.	EXTERNAL & INTERNAL PHOTOS	45
9.2.	SCHEMATICS	45
9.3.	BLOCK DIAGRAM	45
9.4.	USER MANUAL	45

1. TEST RESULT CERTIFICATION

COMPANY NAME: INTERWAVE COMMUNICATIONS
2495 LEGHORN STREET
MOUNTAINT VIEW, CA 94043, USA

EUT DESCRIPTION: PICO 1900 BASESTATION

MODEM NAME: WAVE 2000 PICO BS PLUS


DATE TESTED: SEPTEMBER 30, 2003

TYPE OF EQUIPMENT	INTENTIONAL RADIATOR
EQUIPMENT TYPE	LICENSED TX MODULE IN MOBILE APPLICATION
MEASUREMENT PROCEDURE	ANSI 63.4 / 2001, TIA/EIA 603
PROCEDURE	CERTIFICATION
FCC RULE	CFR 47 PART 24 SUBPART E

Compliance Certification Services, Inc. tested the above equipment for compliance with the requirement set forth in CFR 47, PART 24 Subpart E-Cellular Radiotelephone Service. The equipment in the configuration described in this report, shows the measured emission levels emanating from the equipment do not exceed the specified limit.


Note : This document reports conditions under which testing was conducted and results of tests performed. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document.

Tested By:



VIEN TRAN
EMC TECHNICIAN
COMPLIANCE CERTIFICATION SERVICES

Released For CCS By:



THU CHAN
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES

2. EUT DESCRIPTION

The 1900MHz CDMA Cellular Base Station has:

- an output power 28.1dBm (EIRP)
- a dual omni direction, which is helical pattern type antenna, with 0dBi gain
- the transmitting of frequency range 1930 ~ 1990MHz

3. ENGINEERING JUSTIFICATION

A 2-turn ferrite was added to the power supply, at EUT side. (Manufacturing by Steward, P/N 28A2024-0A0).

4. TEST METHODOLOGY

Both conducted and radiated testing were performed according to the procedures documented on chapter 13 of ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055 and 2.1057.

5. TEST FACILITY

The open area test sites and conducted measurement facilities used to collect the radiated data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

6. ACCREDITATION AND LISTING

The test facilities used to perform radiated and conducted emissions tests are accredited by National Voluntary Laboratory Accreditation Program for the specific scope of accreditation under Lab Code: 200065-0 to perform Electromagnetic Interference tests according to FCC PART 15 AND CISPR 22 requirements. No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government. In addition, the test facilities are listed with Federal Communications Commission (reference no: 31040/SIT (1300B3) and 31040/SIT (1300F2))

7. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

8. TEST SETUP, PROCEDURE AND RESULT

8.1. SECTION 2.1046: RF POWER OUTPUT

INSTRUMENTS LIST

TEST EQUIPMENT LIST				
Name of Equipment	Manufacturer	Model No.	Serial No.	Due Date
LISN, 10 kHz ~ 30 MHz	FCC	50/250-25-2	114	9/6/2004
Line Filter	Lindgren	LMF-3489	497	CNR
LISN, 10 kHz ~ 30 MHz	Solar	8012-50-R-24-BNC	837990	9/6/2004
EMI Test Receiver	R & S	ESHS 20	827129/006	4/17/2004
Antenna, Horn 1 ~ 18 GHz	EMCO	3115	2238	2/4/2004
Quasi-Peak Adaptor	HP	85650A	2811A01155	5/16/2004
SA RF Section, 1.5 GHz	HP	85680B	2732A03661	5/16/2004
Preamplifier, 1300 MHz	HP	8447D	2944A06589	8/22/2004
Antenna, Bilog	Chase	CBL6112B	2586	3/6/2004
SA Display Section 2	HP	85662A	2816A16696	5/16/2004
Spectrum Analyzer	HP	E4446A	US42070220	1/13/2004
Dipole Antenna	ETS	DB-4	1629	5/15/2004
EMI Receiver, 9 kHz ~ 2.9 GHz	HP	8542E	3942A00286	11/20/2004
RF Filter Section	HP	85420E	3705A00256	11/21/2004
Bilog Antenna	A.R.A	LPB-2520/A	1185	6/24/2004
Antenna, Horn 1 ~ 18 GHz	EMCO	3115	9001-3245	2/4/2004
Signal Generator, 2 ~ 40 GHz	R & S	SMP04	DE 34210	05/25/04

MEASUREMENT PROCEDURE


- 1). On a test site, the EUT shall be placed on a turntable, and in the position closest to the normal use as declared by the user.
- 2). The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the frequency of the transmitter.
- 3). The output of the test antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.
- 4). The transmitter shall be switched on, if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
- 5). The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- 6). The transmitter shall than be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- 7). The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- 8). The maximum signal level detected by the measuring receiver shall be noted.
- 9). The transmitter shall be replaced by a tuned dipole (substitution antenna).
- 10). The substitution antenna shall be oriented for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- 11). The substitution antenna shall be connected to a calibrated signal generator.
- 12). If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- 13). The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.

14). The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver.


15). The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.

16). The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.


17). The measure of the effective radiated power is the larger of the two levels recorded, at the input to the substitution antenna, corrected for the gain of the substitution antenna if necessary.

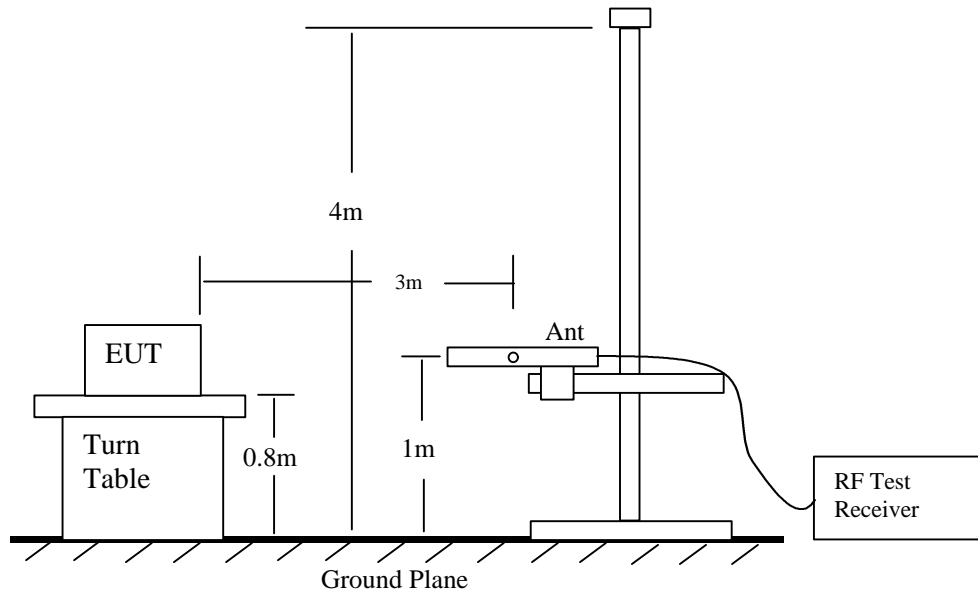

Radiated Emission Measurement 30 to 1000 MHz

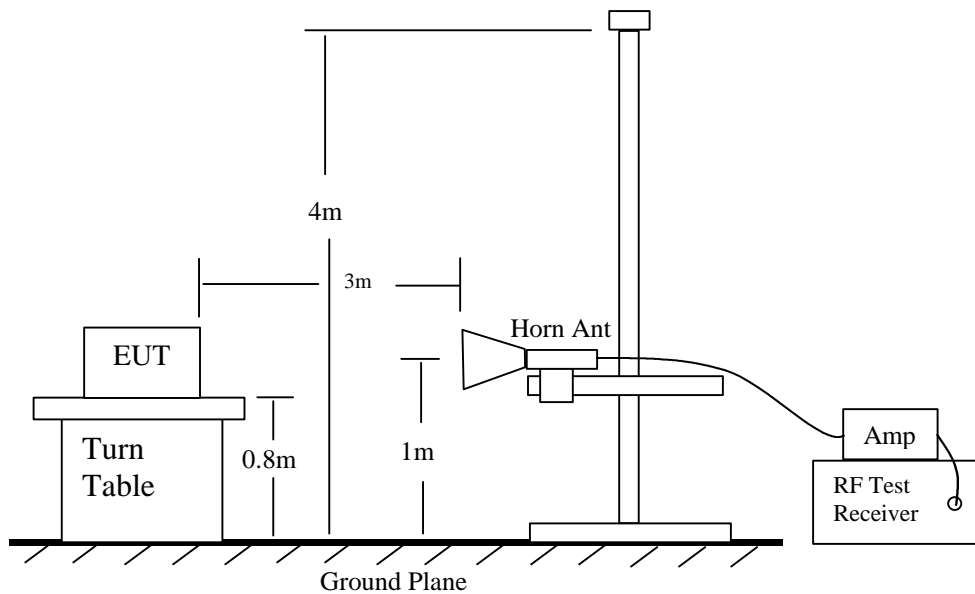

Radiated Emission Above 1000 MHz

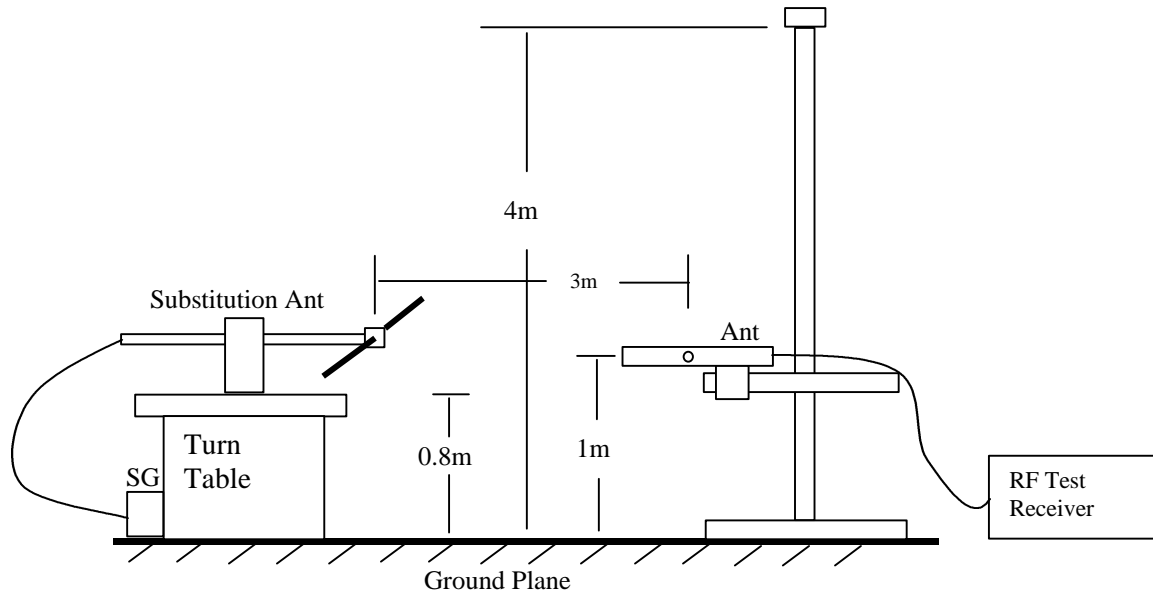

Radiated Emission – Substitution Method Set-up

MEASUREMENT RESULT:

Output Power Measurement:


	FREQUENCY	RF CONDUCTED	EIRP
		AVERAGE	PEAK
	(MHz)	(dBm)	(dBm)
LOW	1931.50	17.00	26.0
MID	1860.00	17.20	28.1
HI	1988.75	16.90	27.9

THE ANTENNA GAIN IS 0dBi

Radiated Emissions



FRONT

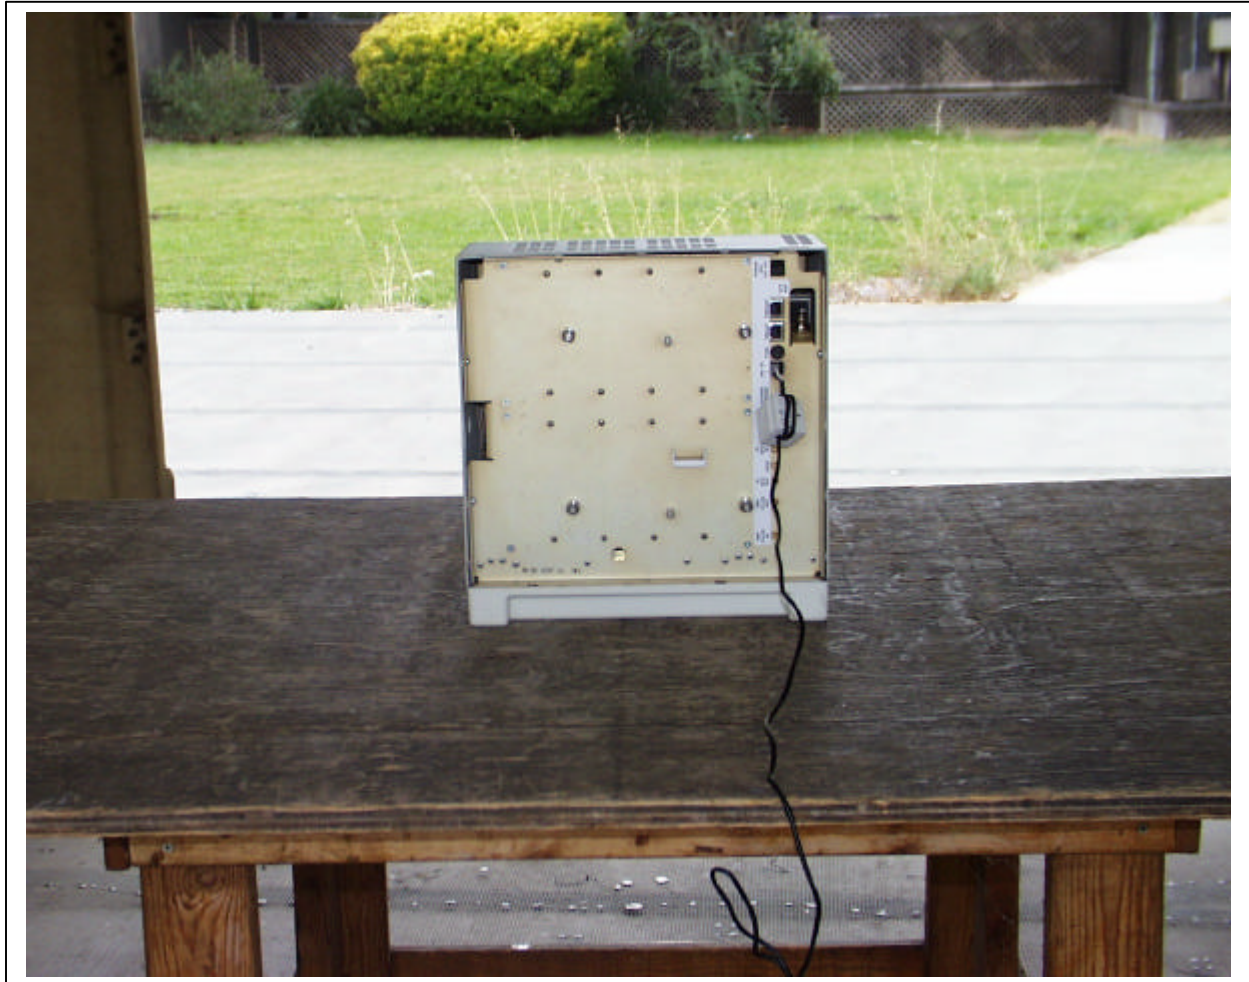

BACK

FUNDAMENTAL OUTPUT POWER (EIRP) LOW, MID AND HIGH CHANNELS

9/12/2003 Compliance Certification Services, Morgan Hill Open Field Site

Test Engineer: VIEN TRAN
Project #: 03U2268-1
Company: INTERWAVE COMMUNICATIONS
EUT Description: 1900MHz PICO - CELLULAR BASESTATION
EUT M/N: WAVE 2000 BS PLUS _ 1900MHz PICO
Test Target: FCC PART 24
Mode Operation: Tx- FUNDAMENTAL _ SUBSTITUTION _ LOW, MID, HI CHANNELS

Test Equipment:

EMCO Horn 1-18GHz T60; S/N: 2238 @3m	Pre-amplifier 1-26GHz	Spectrum Analyzer Agilent E4446A Analyzer	Horn > 18GHz	Limit EIRP
---	-----------------------	--	--------------	---------------

Hi Frequency Cables
☐ (2 ft) ☐ (2-3 ft) ☒ (4-6 ft) ☐ (12 ft)

Peak Measurements:
Fundamental: RBW>99% or 26dB Emissions BW
VBW=RBW=3MHz
Bandedge: RBW=>1% Emissions BW
VBW=>3*RBW
Spurious: RBW=1MHz
VBW=1MHz

f GHz	SA reading (dBuV)	SG reading (dBuV)	CL (dB)	Gain (dBi)	Gain (dBd)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
LOW CH									
1.931	93.9	18.1	0.5	7.3	0.0	24.9	33.0	-8.1	V
1.931	95.0	19.2	0.5	7.3	0.0	26.0	33.0	-7.0	H
MID CH									
1.960	96.6	20.8	0.5	7.3	0.0	27.6	33.0	-5.4	V
1.960	97.5	21.3	0.5	7.3	0.0	28.1	33.0	-4.9	H
HI CH									
1.969	98.0	20.5	0.5	7.3	0.0	27.3	33.0	-5.7	V
1.969	97.1	21.1	0.5	7.3	0.0	27.9	33.0	-5.1	H
RBW = VBW = 3MHz									

8.2. SECTION 2.1047: MODULATION CHARACTERISTICS


Not Applicable.

8.3. SECTION 2.1049: EMISSION MASK & OCCUPIED BANDWIDTH

PROVISIONS APPLICABLE

According to CFR 47 section 22.917.


TEST SETUP

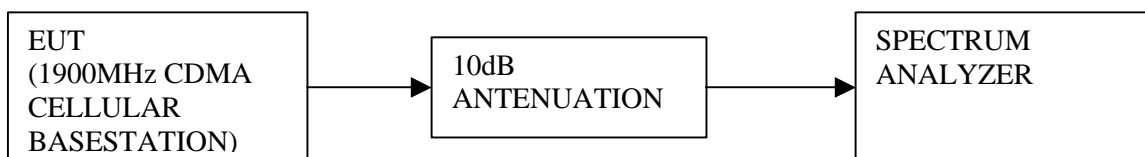


RESULTS:

		99%	-26dBc
	FREQUENCY	BANDWIDTH	BANDWIDTH
CHANNEL	(MHz)	(KHz)	(KHz)
LOW	1931.25	1285.8	1408
MID	1960	1260.3	1590
HI	1988.75	1249.1	1368


Set-up Configuration

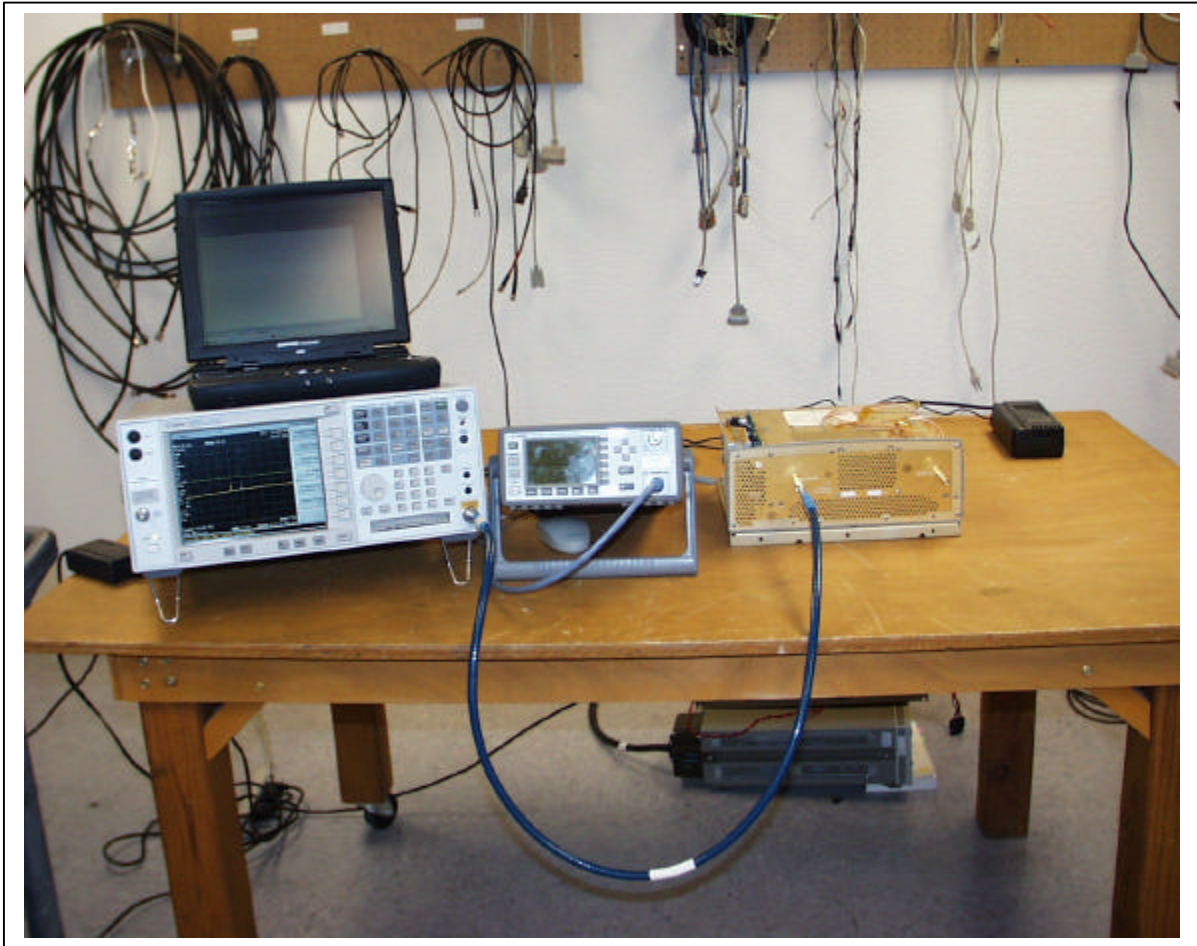


Low Channel Occupied Bandwidth:

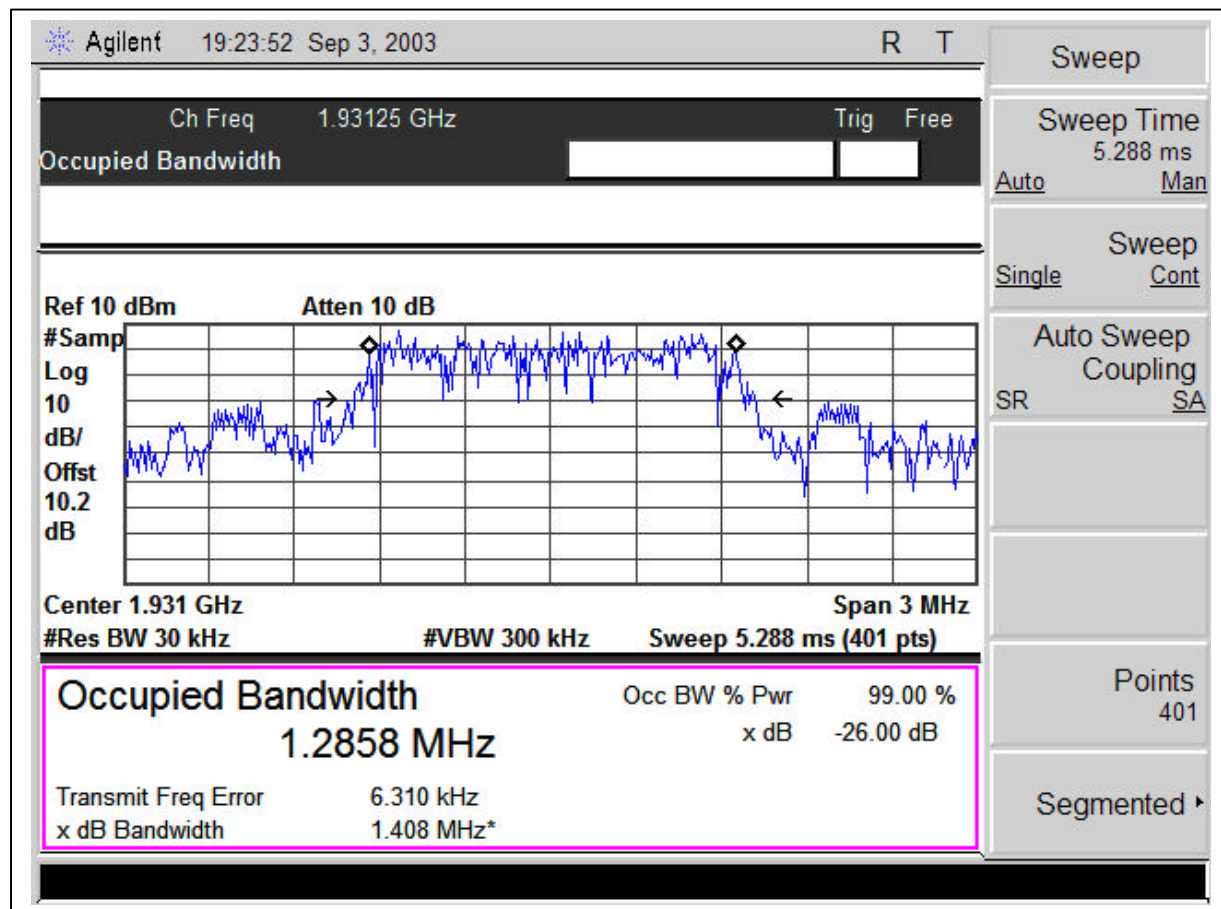

Mid Channel Occupied Bandwidth:

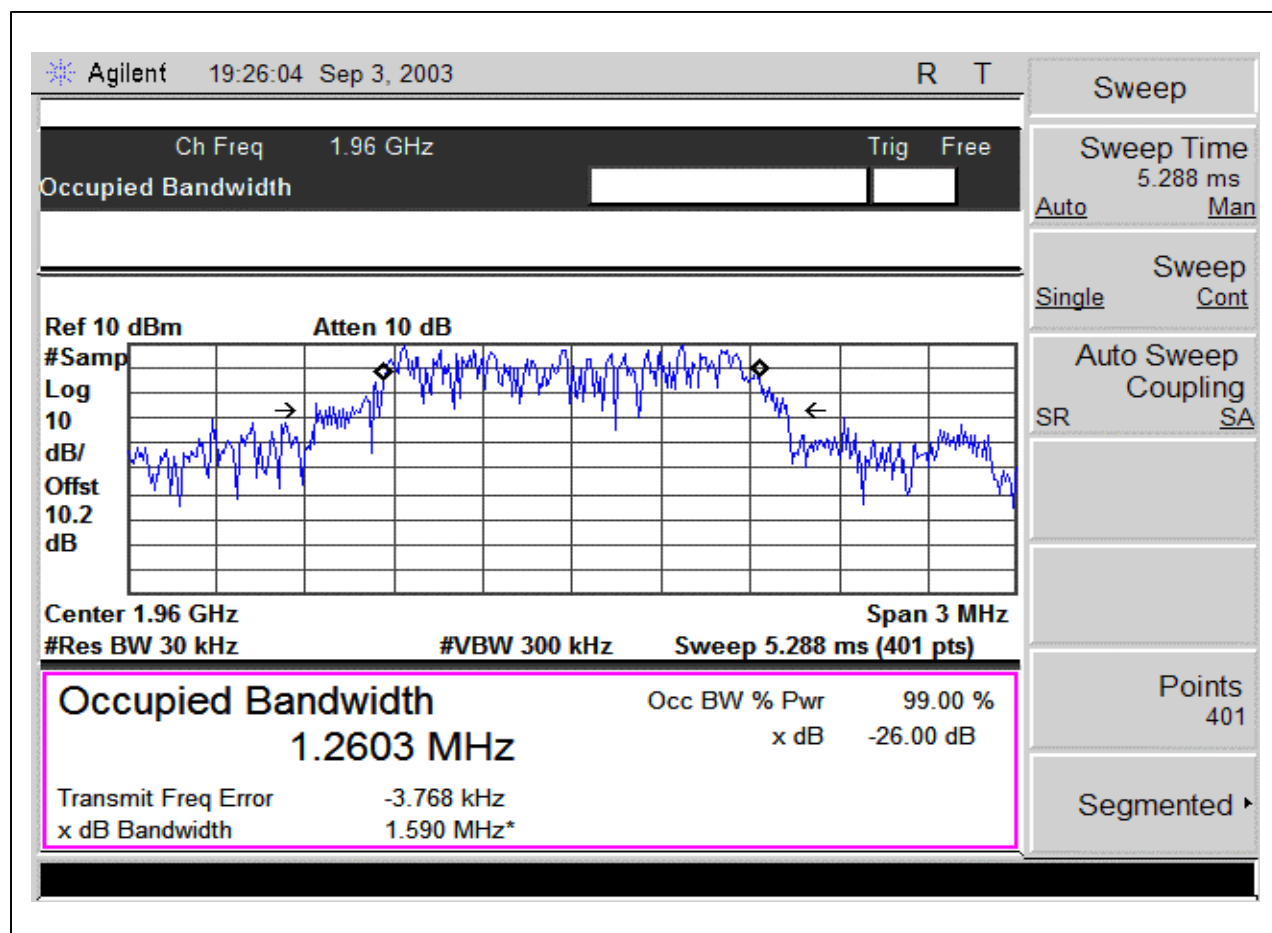

Hi Channel Occupied Bandwidth

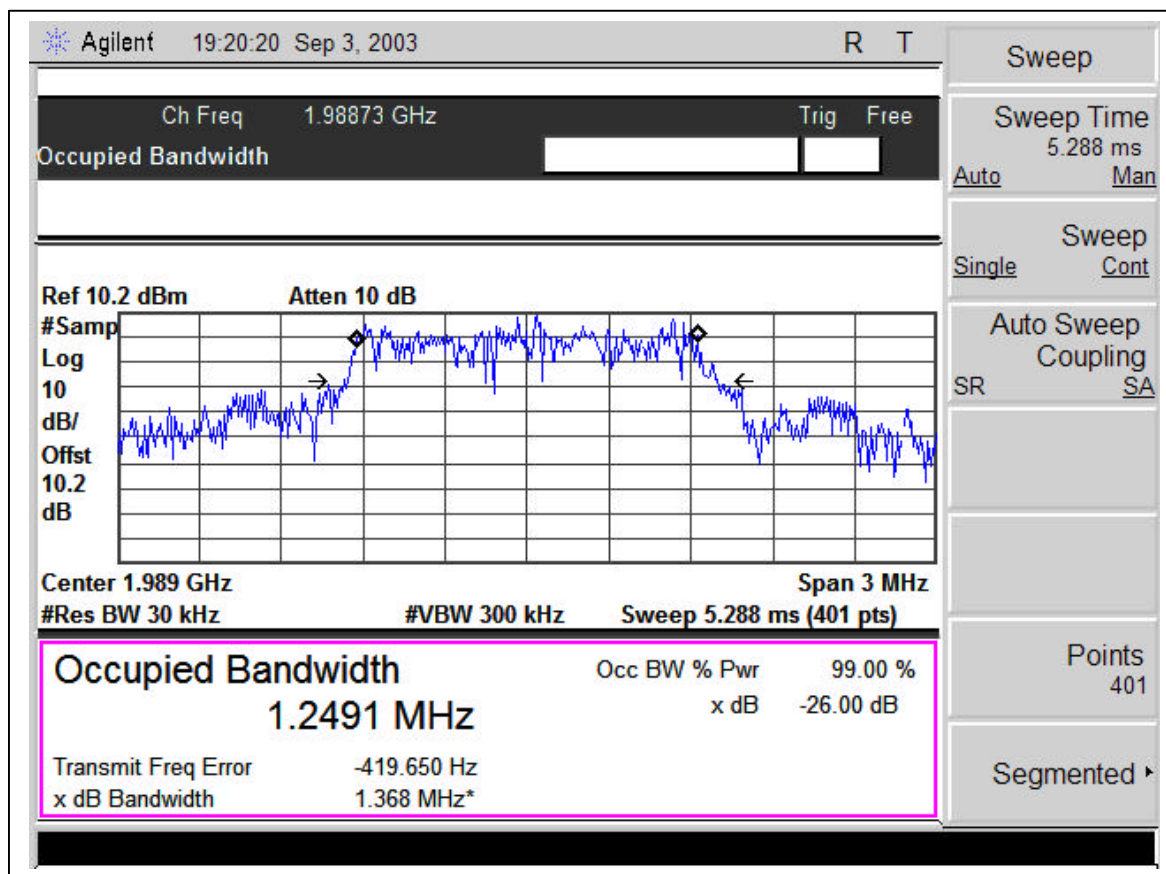

8.4. SECTION 2.1051: SPURIOUS EMISSION AT ANTENNA TERMINAL

INSTRUMENTS LIST

EQUIPMENT	MANUFACTURE	MODEL NO.	SERIAL NO.	CAL. DUE DATE
PSA Analyzer	Agilent	E446A	US42070220	1/13/04
10dB Attenuator	Agilent	8493C	59028	N/A

TEST SETUP



Set-up Configuration


TEST PROCEDURE

- 1) EUT's RF output connector (made solely for the purpose of the test) is connected to the spectrum analyzer, and set as close as possible to the bottom of the block edge and one set as close as possible to the top of the block edge. Set the RES BW to 1% of the emission bandwidth to show compliance with the -13dBm limit, in the 1 MHz bands immediately outside and adjacent to the top and bottom edges of the frequency block.
- 2) For the Out-of-Band measurements a 1 MHz RES BW was used to scan from 15 MHz to 10xfo of the fundamental carrier for all frequency block. A display line was placed at -13dBm to show compliance for spurious, and harmonics.
- 3) 22.917(f): Mobile emissions in base frequency range. The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitter operated must be attenuated to a level not to exceed -80dBm at the transmit antenna connector.


MEASUREMENT RESULT:

BAND EDGE

LOW_BAND EDGE LOW CH 25 – CENTER FREQUENCY: 1930MHz

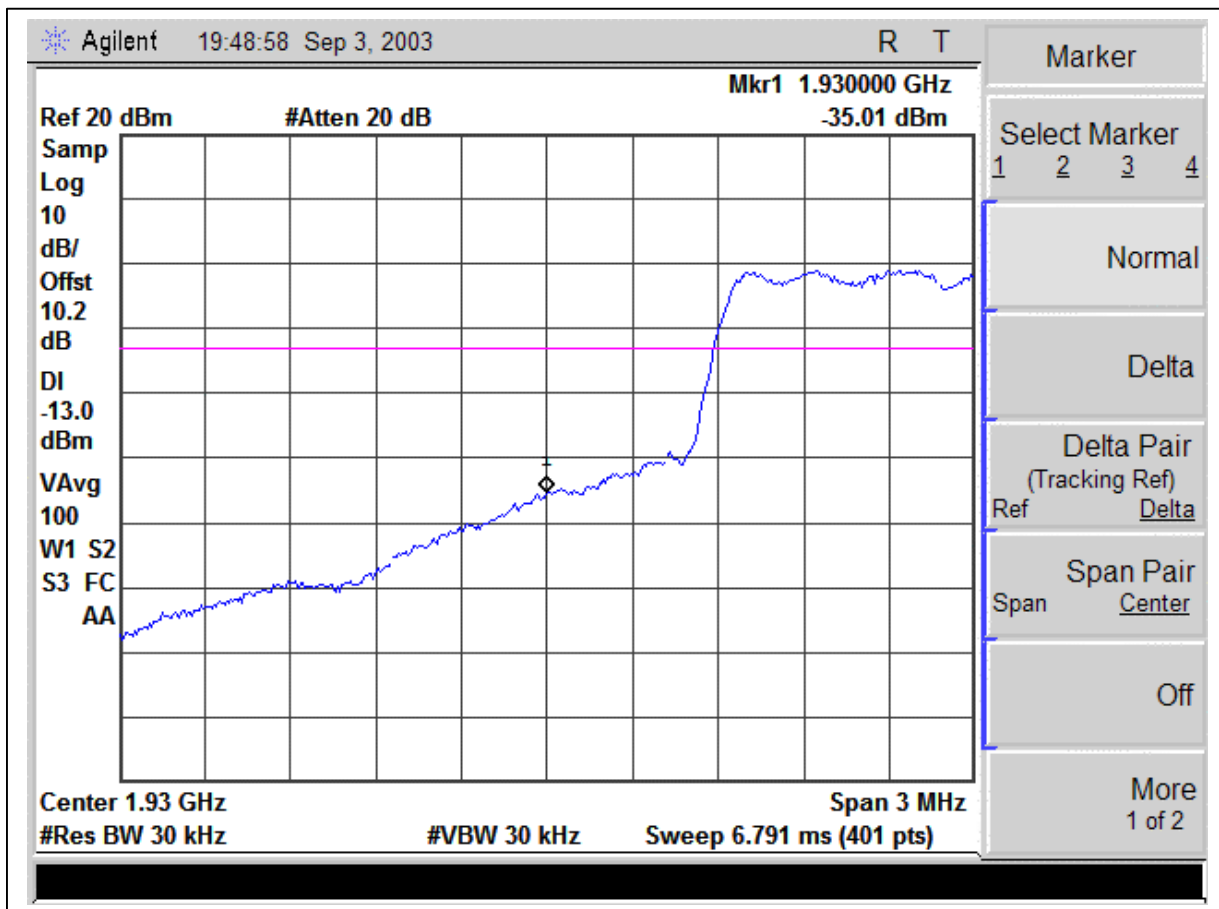


HI BAND EDGE LOW CH 1075 – CENTER FREQUENCY: 1990MHz

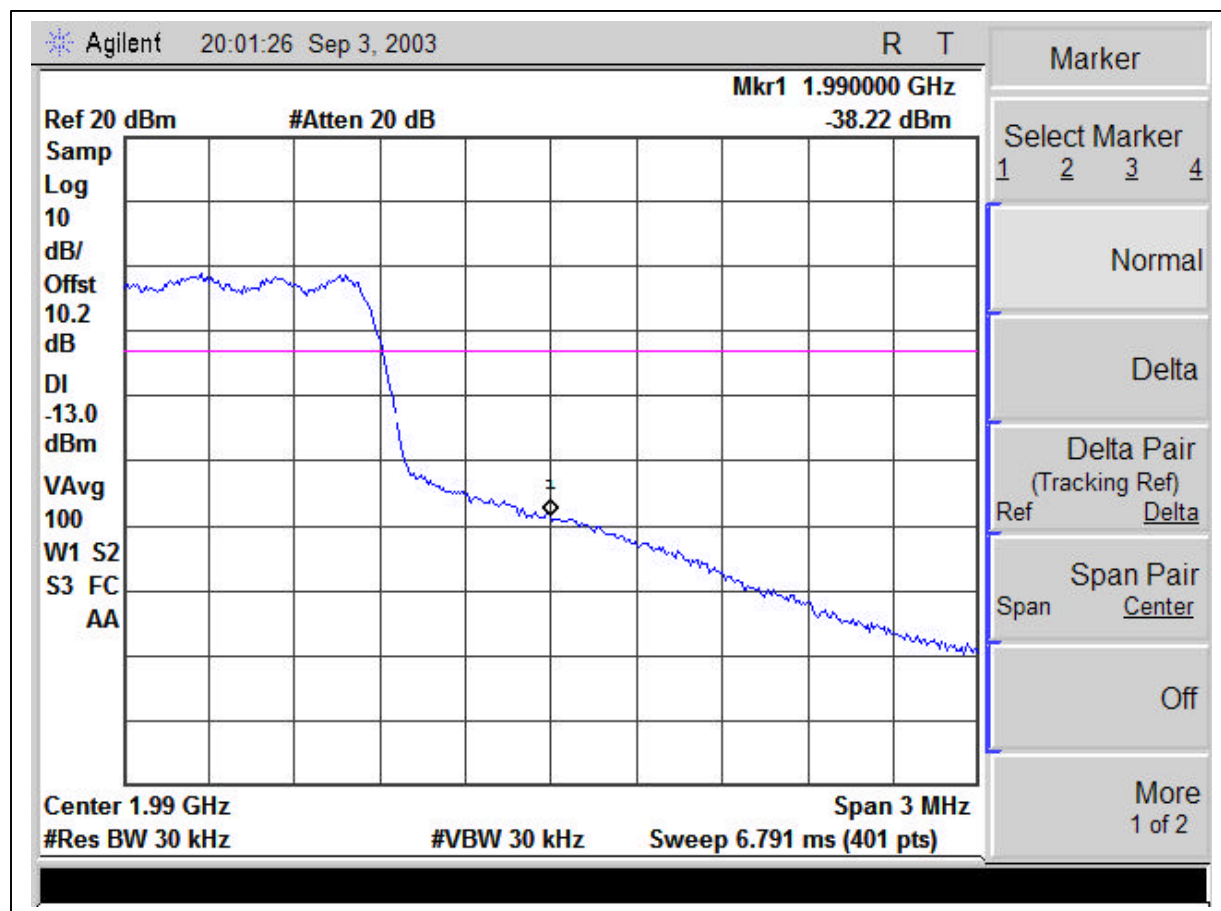


SPURIOUS


OUT OF BAND EMISSION – LOW CHANNEL

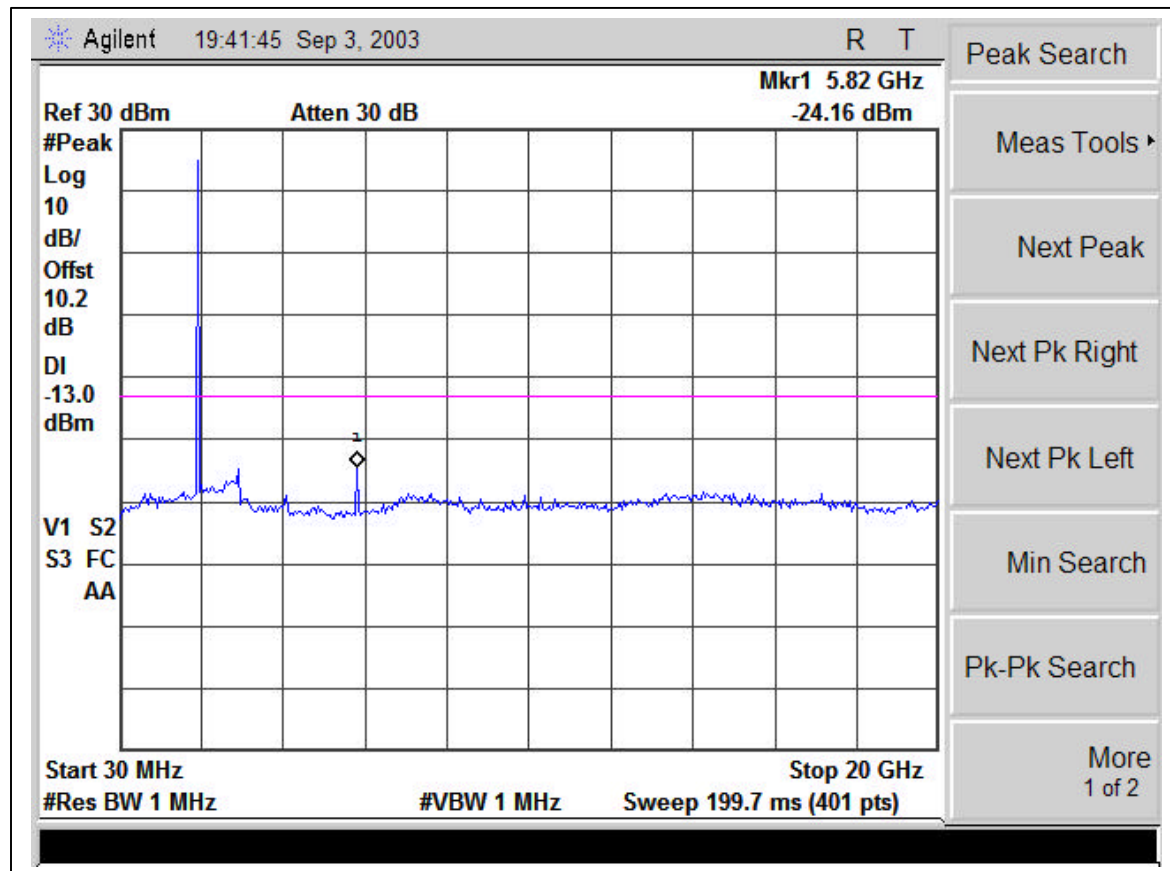

OUT OF BAND EMISSION – MID CHANNEL

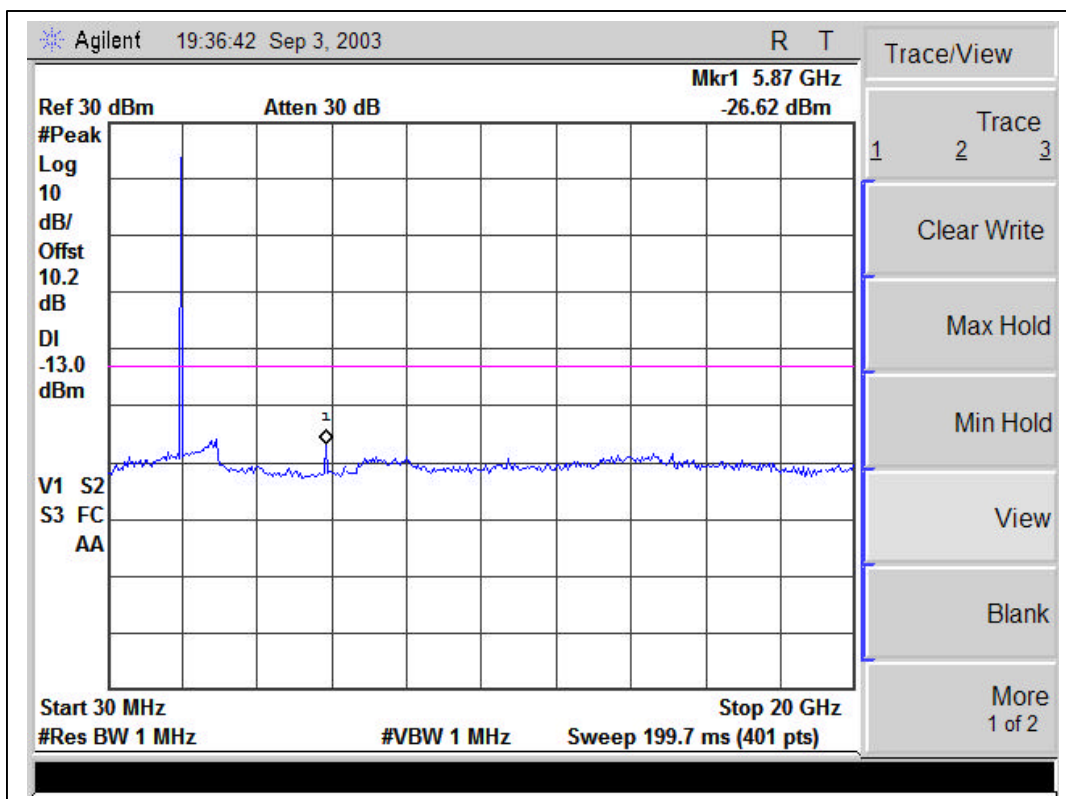

OUT OF BAND EMISSION – HI CHANNEL

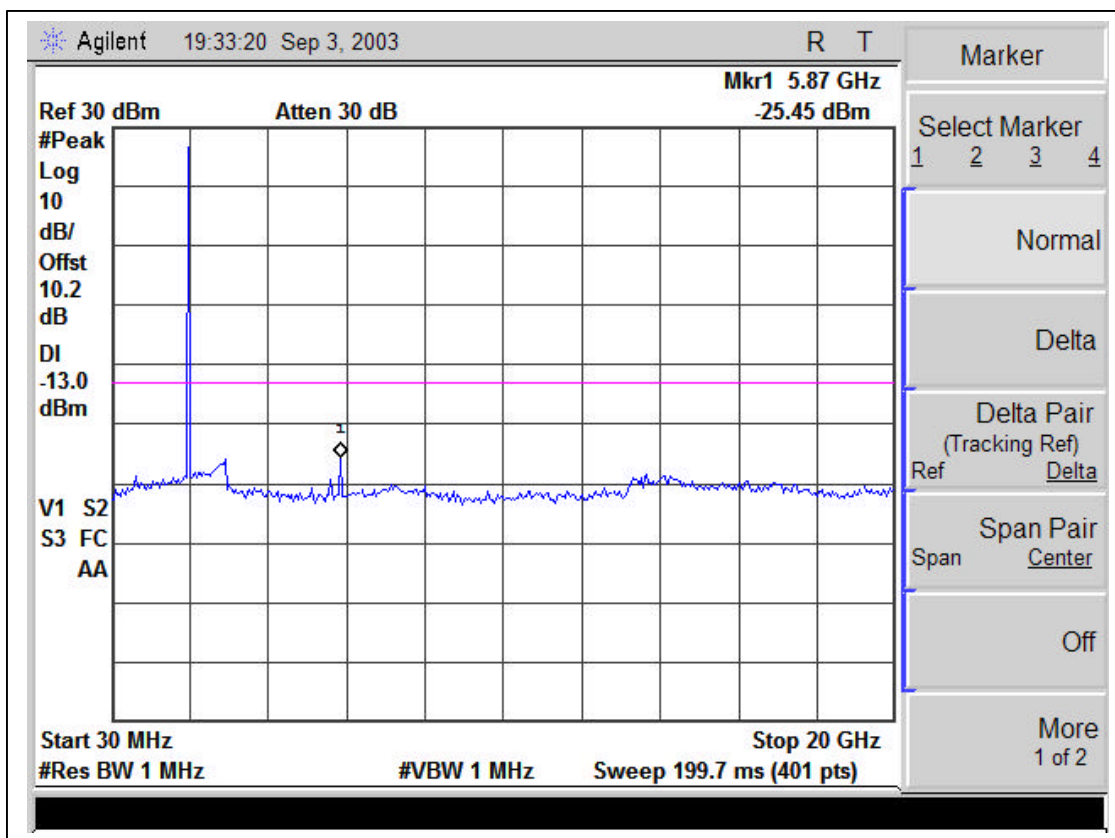


8.5. SECTION 2.1053: FIELD STRENGTH OF SPURIOUS RADIATION

INSTRUMENTS LIST


TEST EQUIPMENT LIST				
Name of Equipment	Manufacturer	Model No.	Serial No.	Due Date
LISN, 10 kHz ~ 30 MHz	FCC	50/250-25-2	114	9/6/2004
Line Filter	Lindgren	LMF-3489	497	CNR
LISN, 10 kHz ~ 30 MHz	Solar	8012-50-R-24-BNC	837990	9/6/2004
EMI Test Receiver	R & S	ESHS 20	827129/006	4/17/2004
Antenna, Horn 1 ~ 18 GHz	EMCO	3115	2238	2/4/2004
Quasi-Peak Adaptor	HP	85650A	2811A01155	5/16/2004
SA RF Section, 1.5 GHz	HP	85680B	2732A03661	5/16/2004
Preamplifier, 1300 MHz	HP	8447D	2944A06589	8/22/2004
Antenna, Bilog	Chase	CBL6112B	2586	3/6/2004
SA Display Section 2	HP	85662A	2816A16696	5/16/2004
Spectrum Analyzer	HP	E4446A	US42070220	1/13/2004
Dipole Antenna	ETS	DB-4	1629	5/15/2004
EMI Receiver, 9 kHz ~ 2.9 GHz	HP	8542E	3942A00286	11/20/2004
RF Filter Section	HP	85420E	3705A00256	11/21/2004
Bilog Antenna	A.R.A	LPB-2520/A	1185	6/24/2004
Antenna, Horn 1 ~ 18 GHz	EMCO	3115	9001-3245	2/4/2004
Signal Generator, 2 ~ 40 GHz	R & S	SMP04	DE 34210	05/25/04

Detector Function Setting of Test Receiver

Frequency Range (MHz)	Detector Function	Resolution Bandwidth	Video Bandwidth
Above 1000	<input checked="" type="checkbox"/> Peak <input type="checkbox"/> Average	<input checked="" type="checkbox"/> 1 MHz <input type="checkbox"/> 1 MHz	<input checked="" type="checkbox"/> 1 MHz <input type="checkbox"/> 10 Hz

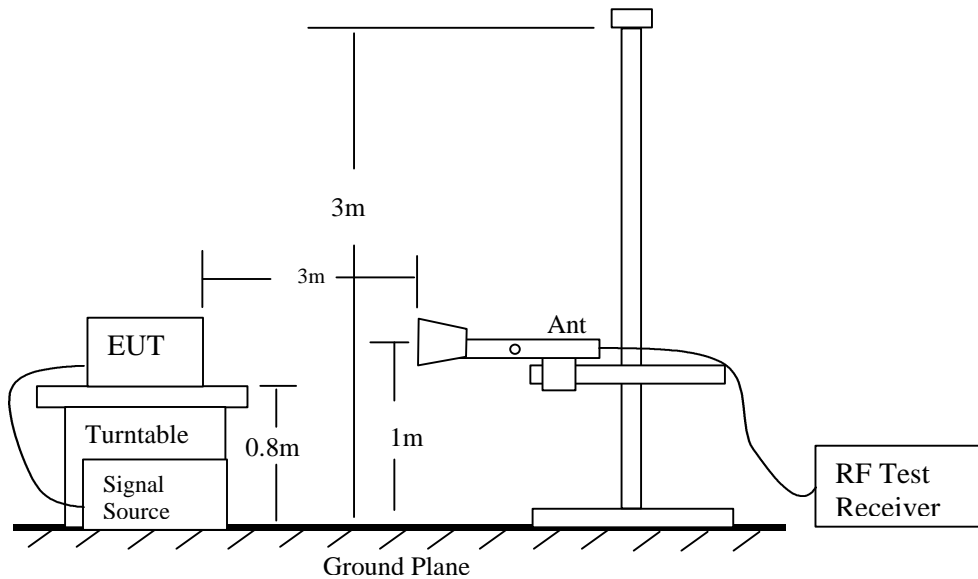

Radiated Emission Measurement

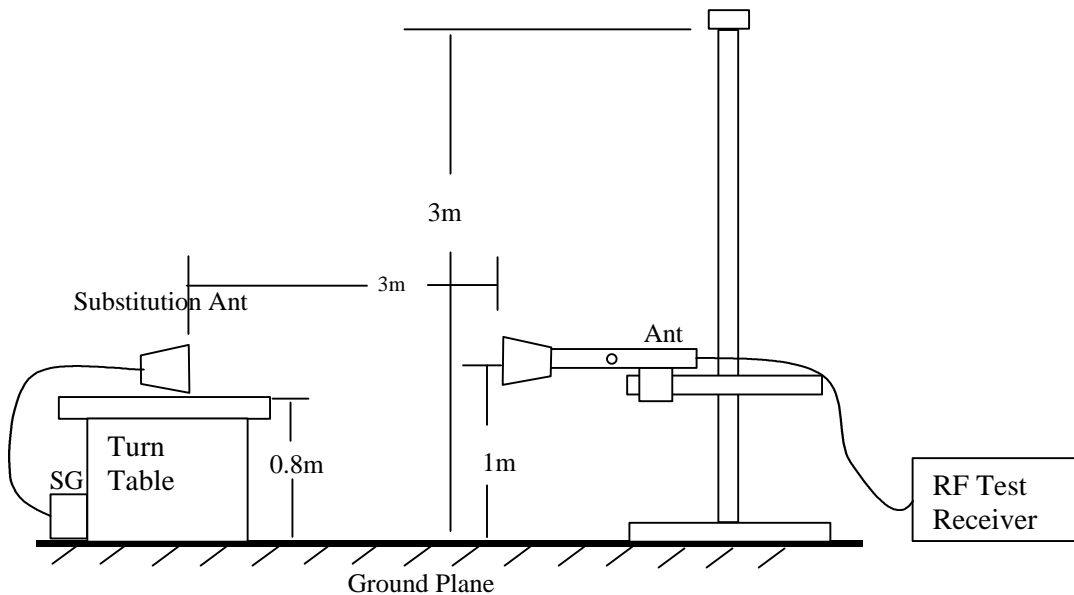

Radiated Emission – Substitution Method set-up

TEST PROCEDURE

- 1). On a test site, the EUT shall be placed on a turntable, and in the position closest to the normal use as declared by the user.
- 2). The test antenna shall be oriented initially for vertical polarization located 1m from the EUT to correspond to the frequency of the transmitter.
- 3). The output of the test antenna shall be connected to the measuring receiver and either a peak or average detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.
- 4). The transmitter shall be switched on, if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
- 5). The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- 6). The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- 7). The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- 8). The maximum signal level detected by the measuring receiver shall be noted.
- 9). The transmitter shall be replaced by a substitution antenna.
- 10). The substitution antenna shall be oriented for vertical polarization.
- 11). The substitution antenna shall be connected to a calibrated signal generator.
- 12). If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- 13). The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.
- 14). The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver.
- 15). The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
- 16). The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.
- 17). The measure of the effective radiated power is the larger of the two levels recorded, at the input to the substitution antenna, corrected for the gain of the substitution antenna if necessary.

MEASUREMENT RESULT

No non-compliance noted, as shown below

Harmonics / Spurious and Substitution Emissions, Low / Mid / High Channels:

9/12/2003 Compliance Certification Services, Morgan Hill Open Field Site

Test Engineer: VIEN TRAN
Project #: 03U2268-1
Company: INTERWAVE COMMUNICATIONS
EUT Description: 1900MHz PICO - CELL - TRANSMITTER
EUT ALN: WAVE 2000 BS PLUS _ 1900MHz PICO
Test Target: FCC PART 24
Mode Operation: Tx_HARMONIC & SPUR _ SUBSTITUTION _ LOW, MID, HI CHANNELS

Test Equipment:

IMCO Horn 1-18GHz T60; S/N: 2238 @3m	Pre-amplifier 1-26GHz T34 HP 8449B	Spectrum Analyzer Agilent E4446A Analyzer	Horn > 18GHz	Limit EIRP
---	---------------------------------------	--	--------------	---------------

Hi Frequency Cables
☐ (2 ft) ☐ (2-3 ft) ☒ (+- 6 ft) ☐ (12 ft)

Peak Measurements:
Fundamental: RBW>99% or 26dB Emissions BW VBW=RBW
Bandedge: RBW>1% Emissions BW VBW> 3*RBW
Spurious: RBW=1MHz VBW=1MHz

f GHz	SA reading (dBuV)	SG reading (dBuV)	CL (dB)	Gain (dBi)	Gain (dBd)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
LOW CH-1931.25MHz									
3.863	59.1	-41.0	0.8	9.6	7.4	-32.3	-13.0	-19.3	V
5.794	63.3	-39.0	1.1	11.2	9.1	-28.8	-13.0	-15.8	V
7.725	48.9	-45.0	1.3	11.2	9.1	-35.0	-13.0	-22.0	V
9.656	44.0	-48.3	1.4	11.4	9.2	-38.4	-13.0	-25.4	V, NOISE FLOOR
3.863	55.8	-44.4	0.8	9.6	7.4	-35.7	-13.0	-22.7	H
5.794	60.5	-39.8	1.1	11.2	9.1	-29.6	-13.0	-16.6	H
7.725	40.1	-54.4	1.3	11.2	9.1	-44.4	-13.0	-31.4	H
9.656	44.8	-48.0	1.4	11.4	9.2	-38.1	-13.0	-25.1	H, NOISE FLOOR
NO OTHER EMISSION FOUND AFTER 5TH HARMONIC									
MID CH-1960MHz									
3.920	60.4	-40.4	0.8	9.6	7.4	-31.6	-13.0	-18.6	V
5.880	62.5	-38.5	1.1	11.2	9.1	-28.3	-13.0	-15.3	V
7.840	45.0	-49.8	1.3	11.2	9.1	-39.9	-13.0	-26.9	V
9.800	43.9	-48.3	1.5	11.6	9.4	-38.2	-13.0	-25.2	V, NOISE FLOOR
3.920	58.5	-41.6	0.8	9.6	7.4	-32.8	-13.0	-19.8	H
5.880	60.2	-37.3	1.1	11.2	9.1	-27.1	-13.0	-14.1	H
7.840	44.7	-48.3	1.3	11.2	9.1	-38.4	-13.0	-25.4	H
9.800	43.2	-50.0	1.5	11.6	9.4	-39.9	-13.0	-26.9	H, NOISE FLOOR
NO OTHER EMISSION FOUND AFTER 5TH HARMONIC									
HI CH-1989.75MHz									
3.975	61.7	-38.0	0.8	9.6	7.5	-29.2	-13.0	-16.2	V
5.965	58.1	-41.0	1.1	11.3	9.1	-30.8	-13.0	-17.8	V
7.955	40.5	-52.8	1.3	11.2	9.0	-42.9	-13.0	-29.9	V
9.944	38.0	-52.5	1.5	11.8	9.6	-42.2	-13.0	-29.2	V, NOISE FLOOR
3.975	63.4	-36.2	0.8	9.6	7.5	-27.4	-13.0	-14.4	H
5.965	58.7	-38.0	1.1	11.3	9.1	-27.8	-13.0	-14.8	H
7.955	37.5	-58.4	1.3	11.2	9.0	-48.5	-13.0	-35.5	H
9.944	36.0	-57.2	1.5	11.8	9.6	-46.9	-13.0	-33.9	H, NOISE FLOOR
NO OTHER EMISSION FOUND AFTER 5TH HARMONIC									

Completed scan from 30MHz to 10th harmonic.

8.6. SECTION 2.1055: FREQUENCY STABILITY


INSTRUMENTS LIST

EQUIPMENT	MANUFACTURE	MODEL NO.	SERIAL NO.	CAL. DUE DATE
PSA Analyzer	Agilent	E446A	US42070220	1/13/04
Environmental Chamber	Thermotron	SE 600-10-10	2980	4/23/04
10dB Attenuator	Agilent	8493C	59028	N/A
DC Power Supply	Kenwood	PA36-3A	7060074	N/A

Detector Function Setting of Test Receiver

Frequency Range (MHz)	Detector Function	Resolution Bandwidth	Video Bandwidth
Above 1000	Peak	300 Hz	300 Hz

TEST SETUP

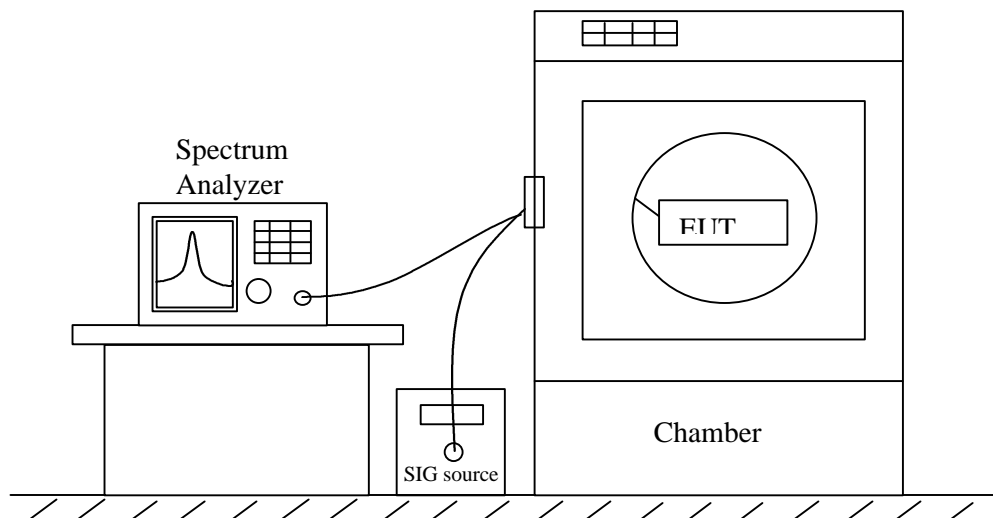



TEST PROCEDURE

- **Frequency stability versus environmental temperature**

- 1). Setup the configuration per figure 6 for frequencies measurement inside the environmental chamber. Set the temperature of the chamber to 25°C. Set SA Resolution Bandwidth low enough to obtain the desired frequency resolution and measure the EUT 25°C operating frequency as reference frequency.
- 2). Turn EUT off and set Chamber temperature to -30°C.
- 3). Allow sufficient time (approximately 20 to 30 minus after chamber reach the assigned temperature) for EUT to stabilize. Turn on EUT and measure the EUT operating frequency. Turn off EUT after the measurement.
- 4). Repeat step 3 with a 10°C increased per stage until the highest temperature of +50°C reached, record all measured frequencies on each temperature step.

- **Frequency stability versus AC input voltage**

- 1). Setup the configuration per figure 6 and set chamber temperature to 25°C. Use a variable AC power supply to power the EUT and set AC output voltage to EUT nominal input AC voltage. Set SA Resolution Bandwidth low enough to obtain the desired frequency resolution and measure the EUT 25°C operating frequency as reference frequency.
- 2). Slowly reduce the EUT input voltage to specified extreme voltage variation ($\pm 15\%$) and record the maximum frequency change.

MEASUREMENT RESULT

No non-compliance noted, as shown below.

FREQUENCY STABILITY

Reference Frequency: CDMA Mid Channel 1959.3125MHz @ 25°C Limit: to stay ± 2.5 ppm = 4898.281 Hz				
Power Supply (AC/DC ADAPTER)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
48.00	50	1959.311800	0.357	± 2.5
48.00	40	1959.310800	0.868	± 2.5
48.00	30	1959.311460	0.531	± 2.5
48.00	25	1959.312500	0	± 2.5
48.00	20	1959.311700	0.408	± 2.5
48.00	10	1959.313300	-0.408	± 2.5
48.00	0	1959.313655	-0.589	± 2.5

Reference Frequency: CDMA Mid Channel 1959.3125MHz @ 25°C Limit: to stay ± 2.5 ppm = 4898.281 Hz				
Power Supply (Vac)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
120.00	25	1959.312500	0	± 2.5
102	25	1959.314200	-0.868	± 2.5
138	25	1959.310800	0.868	± 2.5

NOTE: Per manufacturer specification, the environmental temperature should be from 0 degree C to 50 degree C.

8.7. RADIATED EMISSION

TEST EQUIPMENT LIST				
Name of Equipment	Manufacturer	Model No.	Serial No.	Due Date
LISN, 10 kHz ~ 30 MHz	FCC	50/250-25-2	114	9/6/2004
Line Filter	Lindgren	LMF-3489	497	CNR
LISN, 10 kHz ~ 30 MHz	Solar	8012-50-R-24-BNC	837990	9/6/2004
EMI Test Receiver	R & S	ESHS 20	827129/006	4/17/2004
Antenna, Horn 1 ~ 18 GHz	EMCO	3115	2238	2/4/2004
Quasi-Peak Adaptor	HP	85650A	2811A01155	5/16/2004
SA RF Section, 1.5 GHz	HP	85680B	2732A03661	5/16/2004
Preamplifier, 1300 MHz	HP	8447D	2944A06589	8/22/2004
Antenna, Bilog	Chase	CBL6112B	2586	3/6/2004
SA Display Section 2	HP	85662A	2816A16696	5/16/2004
Spectrum Analyzer	HP	E4446A	US42070220	1/13/2004
Dipole Antenna	ETS	DB-4	1629	5/15/2004
EMI Receiver, 9 kHz ~ 2.9 GHz	HP	8542E	3942A00286	11/20/2004
RF Filter Section	HP	85420E	3705A00256	11/21/2004
Bilog Antenna	A.R.A	LPB-2520/A	1185	6/24/2004
Antenna, Horn 1 ~ 18 GHz	EMCO	3115	9001-3245	2/4/2004
Signal Generator, 2 ~ 40 GHz	R & S	SMP04	DE 34210	05/25/04

TEST PERIPHERALS				
Device Type	Manufacturer	Model Number	Serial Number	FCC ID
AC/DC ADAPTER	UNKNOWN	AW10-3R3-4	2513721	DOC
AC/DC ADAPTER	COMPAQ	LE9702A	N/A	DOC
AC/DC ADAPTER	APX	N/A	SP130948R	DOC
LAPTOP	COMPAQ	1456VQL1N	N/A	DOC
HUB	LINKSYS	EZX88W	N/A	DOC
GPS ANTENNA	CUSTOMER MADE	N/A	N/A	N/A


TEST I / O CABLES								
Cable No	I/O Port	# of I/O Port	Connector Type	Type of Cable	Cable Length	Data Traffic	Bundled	Remark
1	AC	3	US115V	SHIELDED	2m	NO	NO	N/A
2	DC	3	DC	SHIELDED	2m	NO	NO	Ferrites were added on both sides of EUT cable
3	ETHERNET CABLE	1	RJ45	SHIELDED	30m	YES	NO	
4	COAX CABLE	1	N - TYPE	SHIELDED	30m	NO	YES	
5	ETHERNET CABLE	1	RS232	UN-SHIELED	2m	YES	NO	
								N/A

NOTE: A 2-turn ferrite was added to EUT power supply side (Manufacturing by Steward P/N 28A2024-0A0).

Detector Setting of Spectrum Analyzer

Frequency Range (MHz)	Detector Function	Resolution Bandwidth	Video Bandwidth
30 to 1000	<input checked="" type="checkbox"/> Peak	<input checked="" type="checkbox"/> 100 KHz	<input checked="" type="checkbox"/> 100 KHz
	<input checked="" type="checkbox"/> Quasi Peak	<input checked="" type="checkbox"/> 1 MHz	<input checked="" type="checkbox"/> 1 MHz

TEST SETUP

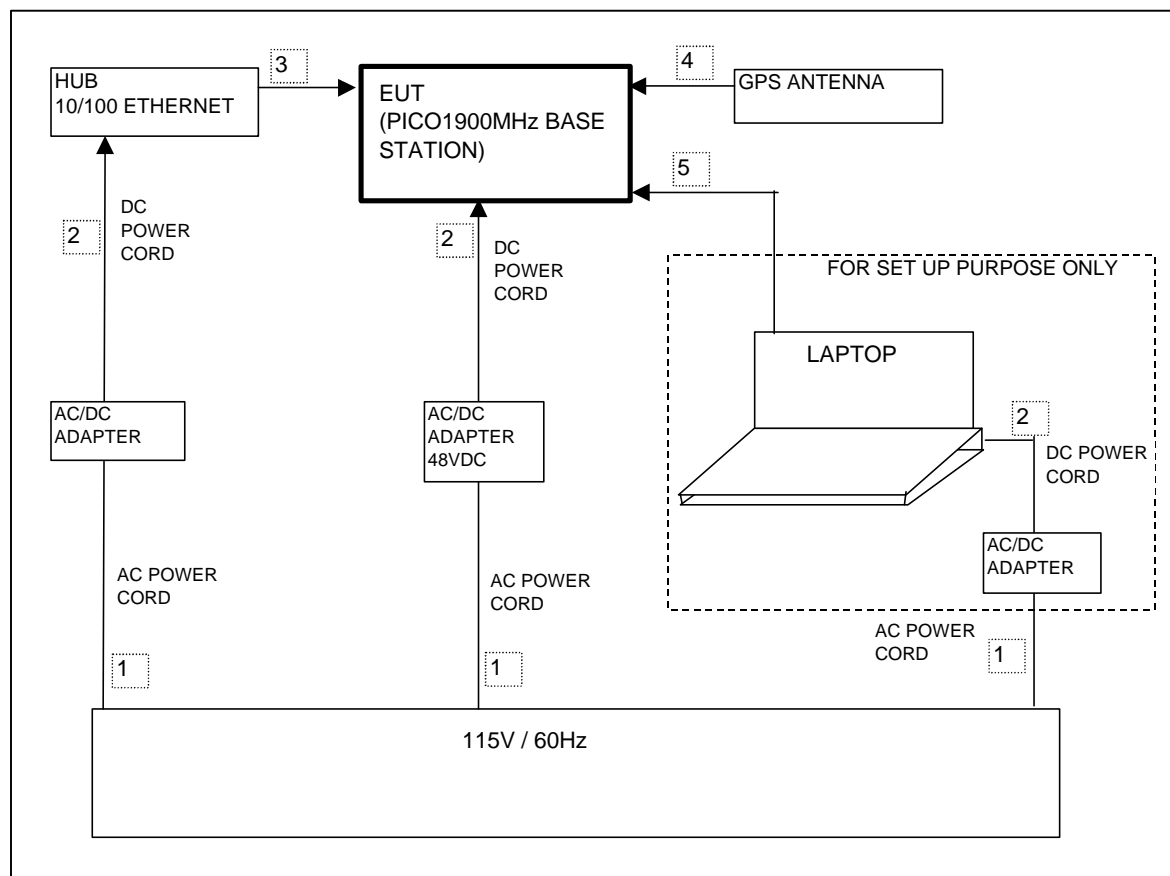


TEST PROCEDURE

1. The EUT was placed on the turn table 0.8 meter above ground inside 3 meter Anechoic Chamber.
2. Set the resolution bandwidth to 120KHz in the test receiver and select Peak function to scan the frequency below 1 GHz.
3. Shift the interference-receiving antenna located in antenna tower upwards and downwards between 1 and 4 meters above ground and find out the local peak emission on frequency domain.
4. Locate the interference-receiving antenna at the position where the local peak reach the maximum emission.
5. Rotate the turn table and stop at the angle where the measurement device has maximum reading
6. Shift the interference-receiving antenna again to detect the maximum emission of the local peak
7. If the reading of the local peak under Peak function is lower than limit by 6dB, then Quasi Peak detection is not needed and this reading should be recorded. And if it is higher than Peak limit, then the test is fail. Others, switch the receiver to Quasi Peak function, set the resolution bandwidth to 100kHz and repeat the procedures (3)~(6). If the reading is lower than limit, this reading should be recorded, otherwise, the test is fail.

MEASUREMENT RESULT


No non-compliance noted, as shown below.

DIGITAL TEST

						<p><i>Project #:</i> 03U2268-1</p> <p><i>Report #:</i> 03U2268-1 B SITE</p> <p><i>Date & Time:</i> 09/16/03 2:24 PM</p> <p><i>Test Engr:</i> VIEN TRAN</p>					
<p>FCC, VCCI, CISPR, CE, AUSTEL, NZ UL, CSA, TUV, BSMI, DHHS, NVLAP</p> <p>561F MONTEREY ROAD, SAN JOSE, CA 95037-9001 PHONE: (408) 463-0885 FAX: (408) 463-0888</p>											
<p><i>Company:</i> INTERWAVE COMMUNICATIONS</p> <p><i>EUT Description:</i> WAVE 20000 BS PLUS (1900MHz)</p> <p><i>Test Configuration :</i> EUT/ETHERNET/LAPTOP/HUB/ANTENNA</p> <p><i>Type of Test:</i> PART 24 (1900MHz FCC CLASS A)</p> <p><i>Mode of Operation:</i> DIGITAL TEST Tx @ WORST CASE</p>											
<< Main Sheet											
Freq.	Reading	AF	Closs	Pre-amp	Level	Limit	Margin	Pol	Az	Height	Mark
(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	FCC A	(dB)	(H/V)	(Deg)	(Meter)	(P/Q/A)
525.36	49.80	18.09	5.83	29.20	44.52	46.40	-1.88	10mV	0.00	1.00	P
525.36	48.00	18.09	5.83	29.20	42.72	46.40	-3.68	10mH	0.00	1.00	P
450.00	46.00	16.72	5.36	29.04	39.03	46.40	-7.37	10mV	0.00	1.00	P
339.89	48.10	14.20	4.58	28.58	38.30	46.40	-8.10	10mH	0.00	1.00	P
117.96	48.80	12.80	2.74	29.08	35.26	43.50	-8.24	10mV	0.00	1.00	P
176.95	49.00	9.65	3.27	28.89	33.03	43.50	-10.47	10mV	0.00	1.00	P
6 Worst Data											


Radiated Emission photos

front view:

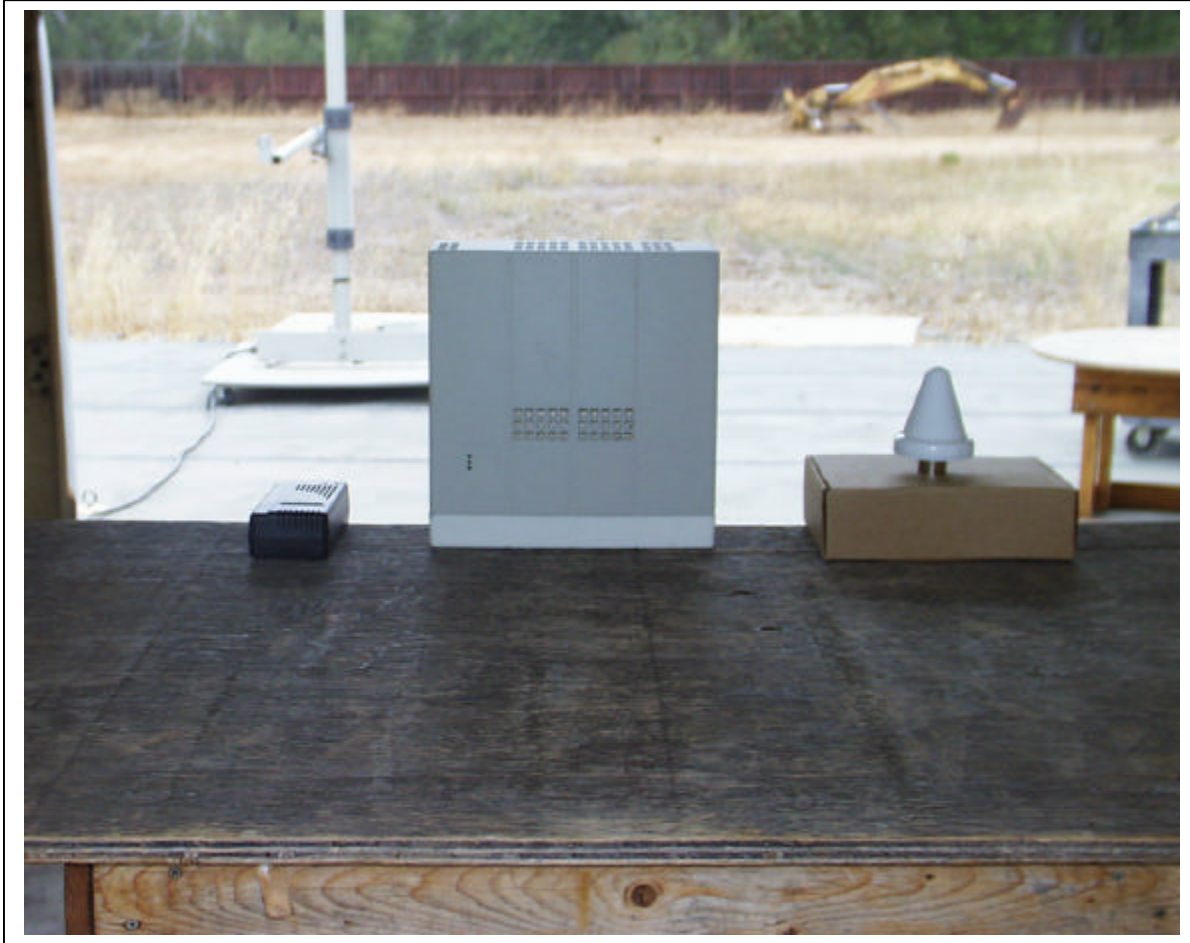

NOTES: Tested with receiving GPS antenna

rear view:

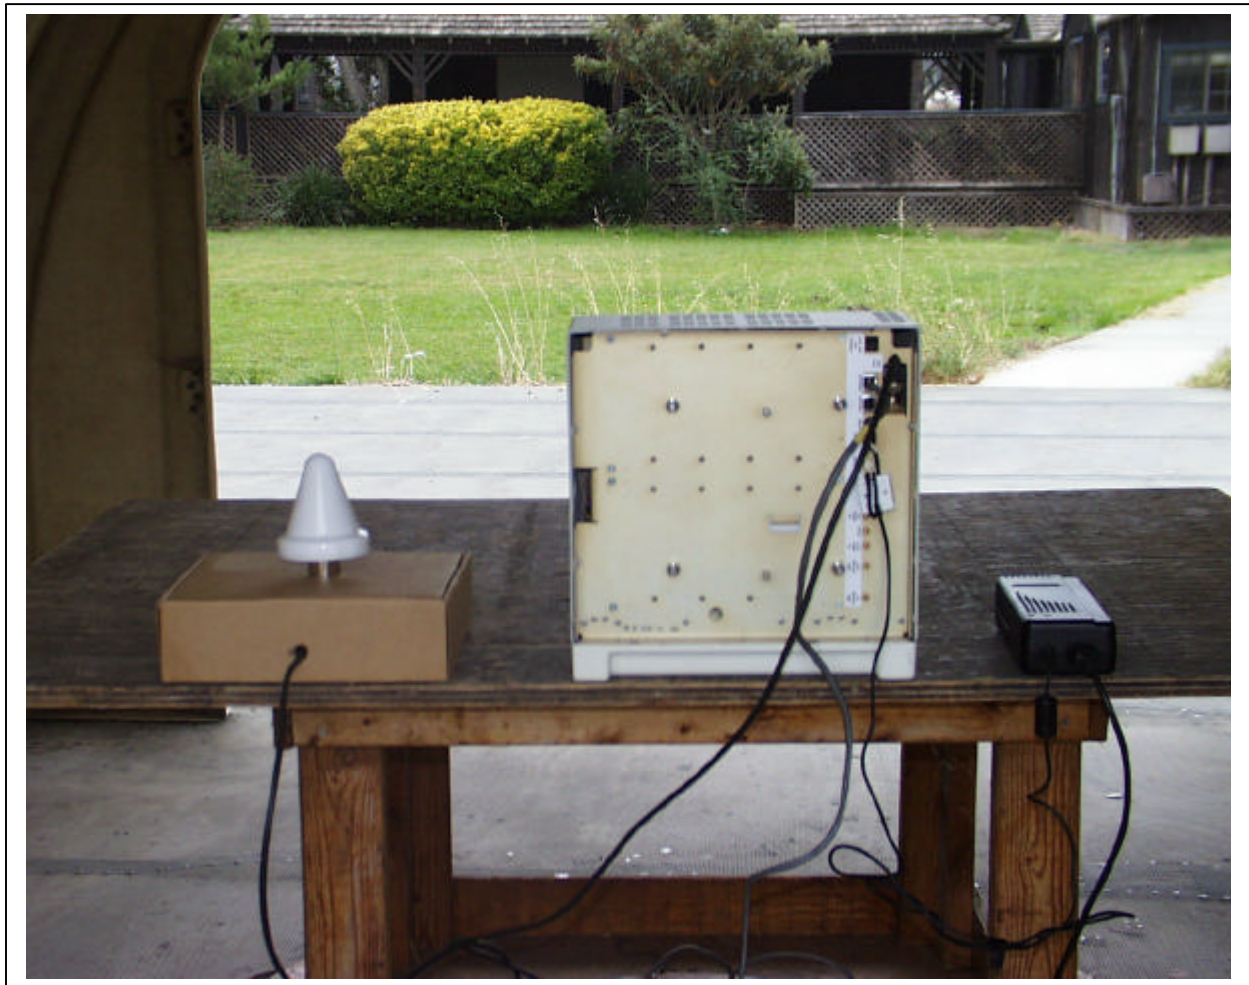


NOTES: Tested with receiving GPS antenna

8.8. POWERLINE CONDUCTED EMISSION

Detector Function Setting of Test Receiver

Frequency Range (MHz)	Detector Function	Resolution Bandwidth	Video Bandwidth
150 KHz to 30 MHz	<input checked="" type="checkbox"/> Peak <input type="checkbox"/> CISPR Quasi Peak	<input checked="" type="checkbox"/> 9 KHz	<input checked="" type="checkbox"/> 9 KHz


TEST SETUP

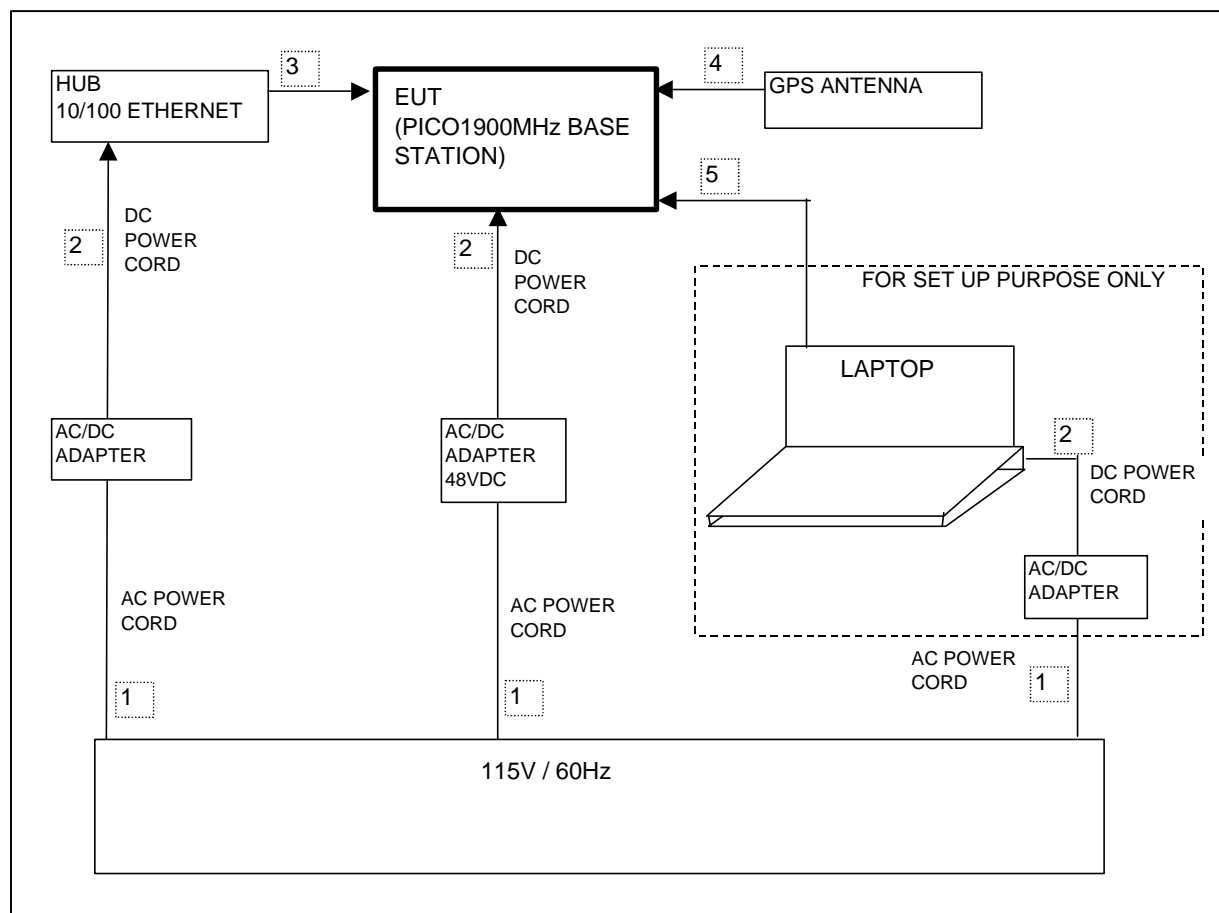

TEST PROCEDURE


1. The EUT was placed on a wooden table 40 cm from a vertical ground plane and approximately 80 cm above the horizontal ground plane on the floor. The EUT was set to transmit in a continuous mode.
2. Line conducted data was recorded for both NEUTRAL and HOT lines.

MEASUREMENT L1 & L2 RESULTS

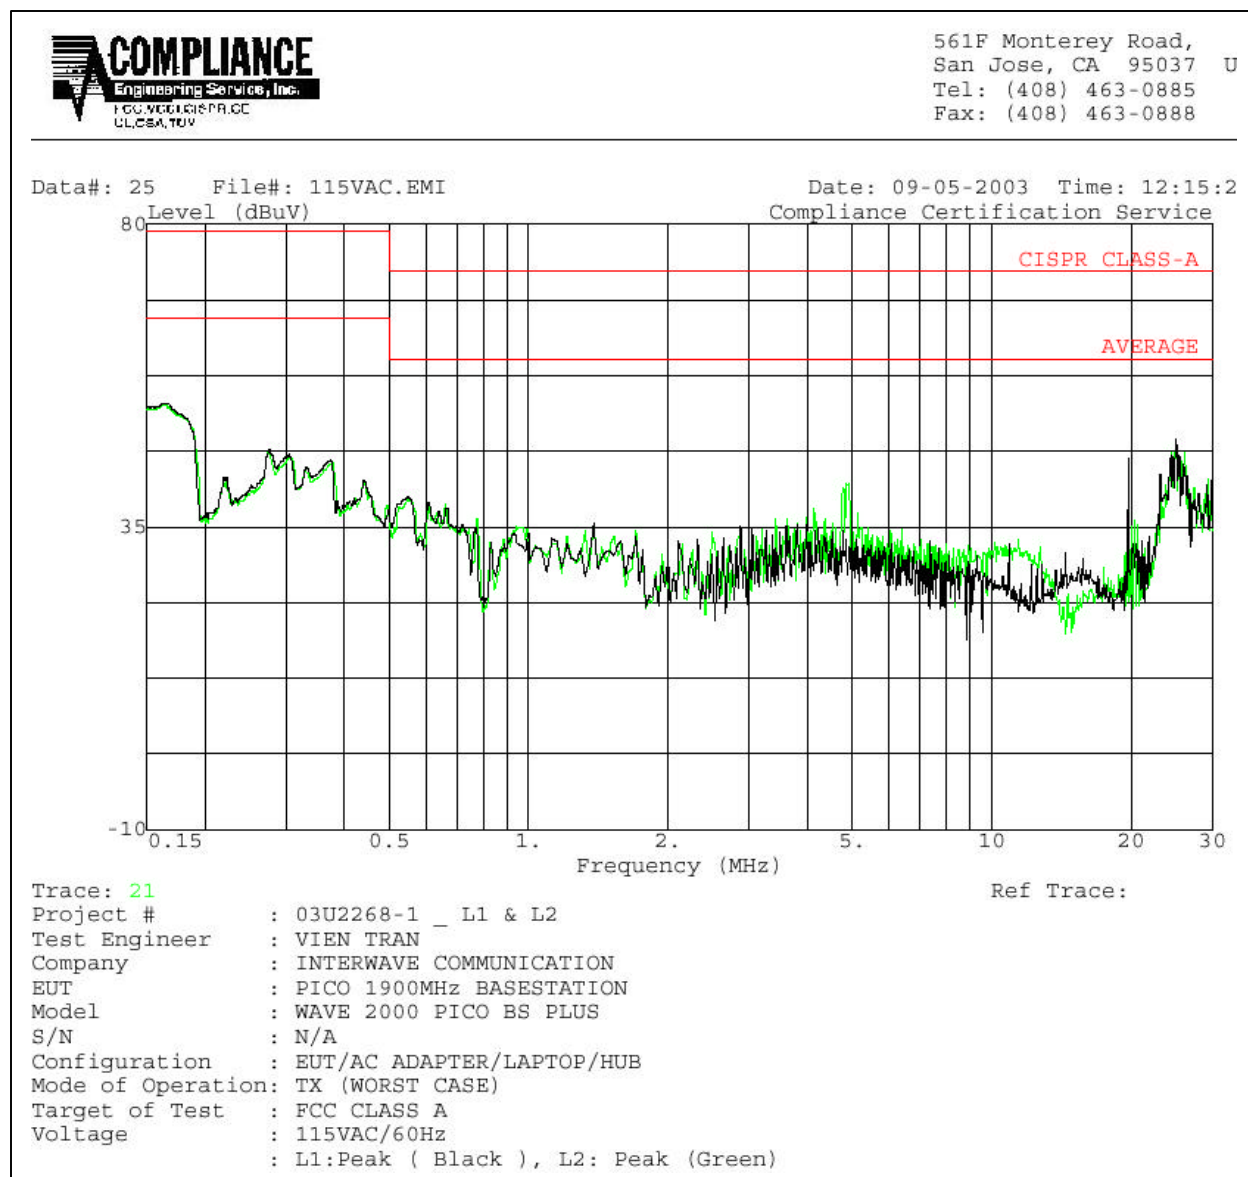

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq.	Reading			Closs	Limit	EN A	Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.16	53.28	--	--	0.00	79.00	66.00	-25.72	-12.72	L1
0.27	45.78	--	--	0.00	79.00	66.00	-33.22	-20.22	L1
24.90	47.90	--	--	0.00	73.00	60.00	-25.10	-12.10	L1
0.16	53.36	--	--	0.00	79.00	66.00	-25.64	-12.64	L2
0.27	46.54	--	--	0.00	79.00	66.00	-32.46	-19.46	L2
24.90	48.88	--	--	0.00	73.00	60.00	-24.12	-11.12	L2
6 Worst Data									

LINE CONDUCTION - FRONT

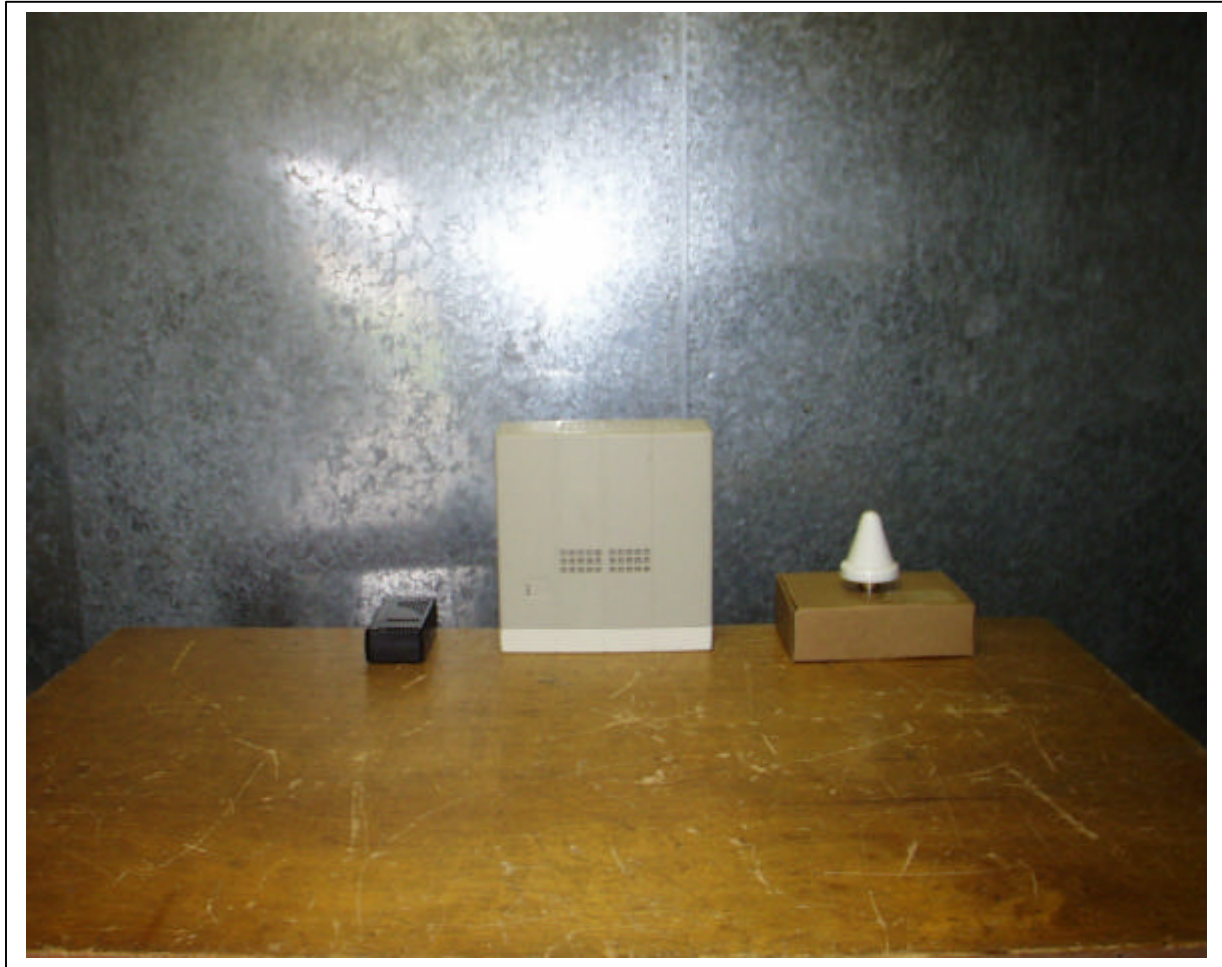

LINE CONDUCTION - BACK



9. APENDIX

- 9.1. EXTERNAL & INTERNAL PHOTOS**
- 9.2. SCHEMATICS**
- 9.3. BLOCK DIAGRAM**
- 9.4. USER MANUAL**

END OF REPORT