



DATE: 23 July 2020

I.T.L. (PRODUCT TESTING) LTD.

FCC Radio Test Report

For

Corning Optical Communication Wireless

Equipment under test:

Building Wireless Systems (BWS) v1.0

Low Power Radio (LPR)

(AWS-3 Section 2110-2220MHz Band)

Tested by:

A. Shelly

Approved by:

D. Shidlowsky

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.



Measurement/Technical Report for Corning Optical Communication Wireless Building Wireless Systems (BWS) v1.0

FCC ID: OJF1LPR

This report concerns: Original Grant:
 Class II change: X
 Class I change:

Equipment type: B21 - Part 20 Industrial Booster (CMRS)

Limits used: 47CFR Parts 2; 27

Measurement procedure used is KDB 935210 D05 v01r03 April 2019 and
ANSI IEEE C63.26-2015

Substitution Method used as in ANSI TIA-603-E-2016

Application for Certification
prepared by:

D. Shidlowsky
ITL (Product Testing) Ltd.
1 Bat Sheva St.
Lod 7120101
Israel
e-mail davids@iltglobal.org

Applicant for this device:
(different from "prepared by")

Isaac Nissan
Corning Optical Communication Wireless
8253 1st Street
Vienna, VA 22812
U.S.A.
Tel: +1-703 855-1773
e-mail: NissanI@corning.com



TABLE OF CONTENTS

1	GENERAL INFORMATION	4
1.1	Administrative Information	4
1.2	List of Accreditations	5
1.3	Product Description	6
1.4	Test Methodology	6
1.5	Test Facility	6
1.6	Measurement Uncertainty	6
2	SYSTEM TEST CONFIGURATION	7
2.1	Justification	7
2.2	EUT Exercise Software	7
2.3	Special Accessories	7
2.4	Equipment Modifications	7
2.5	Configuration of Tested System	9
3	TEST SET-UP PHOTOS	10
4	RF POWER OUTPUT	13
4.1	Test Specification	13
4.2	Test Procedure	13
4.3	Test Limit	13
4.4	Test Results	13
4.5	Test Equipment Used; RF Power Output	53
5	OCCUPIED BANDWIDTH	54
5.1	Test Specification	54
5.2	Test Procedure	54
5.3	Test Limit	54
5.4	Test Results	54
5.5	Test Equipment Used; Occupied Bandwidth	75
6	SPURIOUS EMISSIONS AT ANTENNA TERMINALS	76
6.1	Test Specification	76
6.2	Test Procedure	76
6.3	Test Limit	76
6.4	Test Results	76
6.5	Test Equipment Used; Spurious Emissions at Antenna Terminals	110
7	SPURIOUS RADIATED EMISSION	111
7.1	Test Specification	111
7.2	Test Procedure	111
7.3	Test Limit	112
7.4	Test Results	112
7.5	Test Instrumentation Used; Radiated Measurements	113
8	APPENDIX A - CORRECTION FACTORS	114
8.1	Correction factors for RF OATS Cable 35m	114
8.2	Correction factors for RF OATS Cable 10m	115
8.3	Correction factors for Horn Antenna	116
8.4	Correction factors for Horn Antenna	117
8.5	Correction factors for Log Periodic Antenna	118
8.6	Correction factors for Biconical Antenna	119
8.7	Correction factors for ACTIVE LOOP ANTENNA	120



1 General Information

1.1 Administrative Information

Manufacturer:	Corning Optical Communication Wireless
Manufacturer's Address:	8253 1st Street Vienna, VA 22812 U.S.A. Tel: +1-703 855-1773
Manufacturer's Representative:	Isaac Nissan
Equipment Under Test (E.U.T):	Building Wireless Systems (BWS) v1.0
Equipment Model No.:	Low Power Radio (LPR)
Equipment Serial No.:	Not Designated
Date of Receipt of E.U.T:	11.05.2020
Start of Test:	11.05.2020
End of Test:	21.07.2020
Test Laboratory Location:	I.T.L (Product Testing) Ltd. 1 Batsheva St, Lod, Israel 7116002
Test Specifications:	FCC Parts 2; 27



1.2 List of Accreditations

The EMC laboratory of I.T.L. is accredited by/registered with the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), FCC Designation Number is IL1005.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-20025, R-2729, T-20028, G-20068.
5. Department of Innovation, Science and Economic Development (ISED) Canada, CAB identifier: IL1002.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.

1.3 Product Description

Corning's BWS™ platform 1.0 is the first fully-digital, end-to-end in-building cellular solution, for medium size venues.

Corning's Low Power Radio (LPR) units are the end-point antennas connected by optical cable to the BWS system Digital Router Unit (DRU) (distribution/routing of RF samples via CPRI stream), and to the system Power Supply Unit (PSU) for power.

LPR is the first release of Corning's fully-digital radio remote unit, providing plug-and-play, cost-effective processing, minimizing power loss and noise.

1.4 Test Methodology

Both conducted and radiated testing were performed according to the procedures in KDB 935210 D05 v01r03 April 2019 and ANSI/TIA-603-E-2016. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.5 Test Facility

Both conducted and radiated emissions tests were performed at I.T.L.'s testing facility in Lod, Israel. I.T.L.'s EMC Laboratory is accredited by A2LA, certificate No. 1152.01 and its FCC Designation Number is IL1005.

1.6 Measurement Uncertainty

Conducted Emission (CISPR 11, EN 55011, CISPR 32, EN 55032, ANSI C63.4)

0.15 – 30 MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 3.44 dB

Radiated Emission (CISPR 11, EN 55011, CISPR 32, EN 55032, ANSI C63.4) for open site 30-1000MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 4.98 dB



2 System Test Configuration

2.1 Justification

The E.U.T. was previously tested for FCC certification as follows:

The EUT consists of the LPR (Low-Power Remote Module) which is connected with the head-end ICRAN equipment (BBU and DRU) using fiber optic cable.

The RF source signals are represented in the setup by BBU unit.

An "Exercise" SW on the computer was used to enable/disable transmission of the EUT, while the EUT output was connected to the spectrum analyzer.

The system was tested under maximum gain conditions.

Only peak power testing was done on the both ports, all other testing was performed

1 port (see customer declaration on following page regarding the identical ports).

Presently the following tests were performed in order to allow the use of 5G:

RF output power, occupied bandwidth, and spurious emissions.

Testing was performed on the following configuration:

Frequency Range (MHz)		
Service/Band	Downlink (DL)	Technology
AWS-3	2110-2200	LTE, QPSK

2.2 EUT Exercise Software

vHCM SW ver. 1.0 used for commands delivery. These commands are used to enable/disable the EUT transmission.

EUT Embedded SW versions are:

DRU ver dru_d719_10_25

LPR ver LPR_D803_01.63

2.3 Special Accessories

No special accessories were needed in order to achieve compliance.

2.4 Equipment Modifications

No modifications were necessary in order to achieve compliance.



CORNING

Declaration

Date: December 25, 2019

RE: Corning Optical Communication Wireless
P/N: LPR-3C-2A2P2W-10
FCC ID: OJF1LPR

I hereby declare that the MIMO stream 1 and MIMO stream 2 of the LPR-3C-2A2P2W-10 have the identical RF chain including antenna gain of 2dBi.

Authorized Signature:

Printed Name:


Isaac Nissan



2.5 Configuration of Tested System

Product Name	Building Wireless Systems (BWS) v1.0
Model Name	Low Power Radio (LPR)
Working voltage	100-240VAC/ 48VDC
Mode of operation	Industrial Booster for AWS-3 band
Modulations	16QAM, 64QAM, 256QAM, QPSK
Operating Frequency Range	2110-2200 MHz
Transmit power	~15.0 dBm
Antenna Gain	2dBi
DATA rate	N/A
Modulation BW	5MHz, 10MHz, 15 MHz, 20MHz
DC Voltage and DC current applied to the final amplifying device	36-60VDC, (nominal voltage 48V)/ 2A

3 Test Set-Up Photos

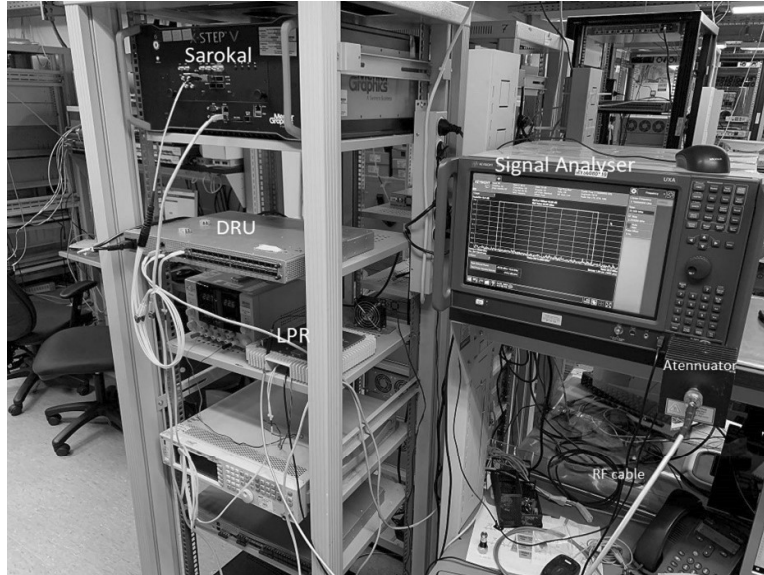


Figure 1. Conducted Emission From Antenna Port Tests



Figure 2. Radiated Emission Test 9kHz - 30MHz



Figure 3. Radiated Emission Test 30 - 200 MHz



Figure 4. Radiated Emission Test 200 - 1000MHz



Figure 5. Radiated Emission Test 1-18GHz

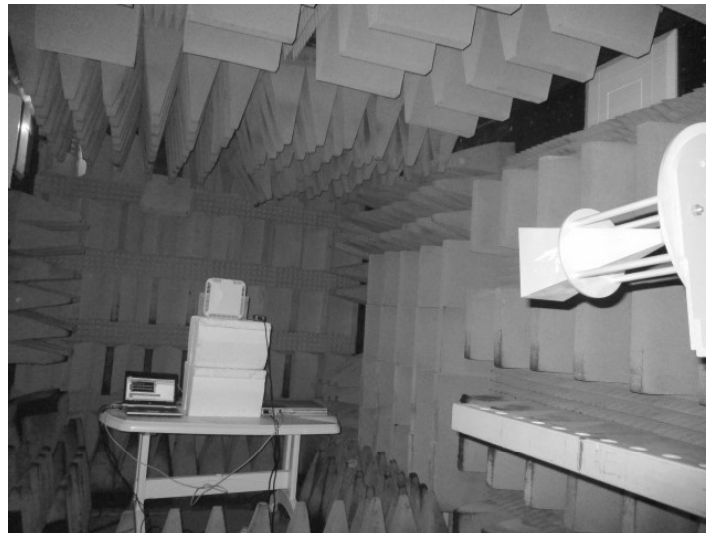


Figure 6. Radiated Emission Test 18-22GHz



4 RF Power Output

4.1 Test Specification

FCC Part 27, Subpart C (27.50) (d)

4.2 Test Procedure

(Temperature (22°C)/ Humidity (30%RH))

The E.U.T. antenna terminal was connected to the Spectrum Analyzer through an external attenuator and an appropriate coaxial cable. Special attention was taken to prevent Spectrum Analyzer RF input overload.

4.3 Test Limit

An EIRP of 1640 watts/MHz when transmitting with an emission bandwidth greater than 1 MHz (62.1 dBm/MHz)

4.4 Test Results

JUDGEMENT: Passed

See additional information in Table 1 to Table 3 and Figure 7 to Figure 105 for Antenna Port 1 SISO.

See additional information in Table 1 to Table 6 and Figure 106 to Figure 204 for Antenna Port 2 MIMO.

Modulation	Bandwidth	Sub Carrier	Operation Frequency	Reading	Antenna Gain	EIRP	Limit	Margin
	(MHz)	(kHz)	(MHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
16QAM	5	15	2112.5	19.38	2.0	21.38	62.1	-40.7
		30	2112.5	19.54	2.0	21.54	62.1	-40.6
		15	2155.0	20.25	2.0	22.25	62.1	-39.9
		30	2115.0	20.20	2.0	22.20	62.1	-39.9
		15	2197.5	20.18	2.0	22.18	62.1	-39.9
		30	2197.5	20.05	2.0	22.05	62.1	-40.1
	10	15	2115.0	20.03	2.0	22.03	62.1	-40.1
		30	2115.0	19.87	2.0	21.87	62.1	-40.2
		60	2115.0	19.85	2.0	21.85	62.1	-40.3
		15	2155.0	19.90	2.0	21.90	62.1	-40.2
		30	2155.0	20.32	2.0	22.32	62.1	-39.8
		60	2155.0	19.98	2.0	21.98	62.1	-40.1
		15	2195.0	20.04	2.0	22.04	62.1	-40.1
		30	2195.0	20.07	2.0	22.07	62.1	-40.0
		60	2195.0	19.99	2.0	21.99	62.1	-40.1
	15	15	2117.5	20.43	2.0	22.43	62.1	-39.7
		30	2117.5	20.33	2.0	22.33	62.1	-39.8
		60	2117.5	19.76	2.0	21.76	62.1	-40.3
		15	2155.0	20.30	2.0	22.30	62.1	-39.8
		30	2155.0	20.02	2.0	22.02	62.1	-40.1
		60	2155.0	20.02	2.0	22.02	62.1	-40.1
		15	2192.0	20.11	2.0	22.11	62.1	-40.0
		30	2192.0	20.25	2.0	22.25	62.1	-39.9
		60	2192.0	20.04	2.0	22.04	62.1	-40.1
	20	15	2120.0	19.98	2.0	21.98	62.1	-40.1
		30	2120.0	19.94	2.0	21.94	62.1	-40.2
		60	2120.0	19.98	2.0	21.98	62.1	-40.1
		15	2155.0	20.10	2.0	22.10	62.1	-40.0
		30	2155.0	20.05	2.0	22.05	62.1	-40.1
		60	2155.0	20.17	2.0	22.17	62.1	-39.9
		15	2190.0	19.97	2.0	21.97	62.1	-40.1
		30	2190.0	19.97	2.0	21.97	62.1	-40.1
		60	2190.0	19.95	2.0	21.95	62.1	-40.2

Table 1 RF Power Output 16QAM, Antenna Port 1 SISO

Modulation	Bandwidth	Sub Carrier	Operation Frequency	Reading	Antenna Gain	EIRP	Limit	Margin
	(MHz)	(kHz)	(MHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
64QAM	5	15	2112.5	19.72	2.0	21.72	62.1	-40.4
		30	2112.5	19.85	2.0	21.85	62.1	-40.3
		15	2155.0	20.36	2.0	22.36	62.1	-39.7
		30	2155.0	20.16	2.0	22.16	62.1	-39.9
		15	2197.5	20.01	2.0	22.01	62.1	-40.1
		30	2197.5	20.08	2.0	22.08	62.1	-40.0
	10	15	2115.0	19.72	2.0	21.72	62.1	-40.4
		30	2115.0	19.77	2.0	21.77	62.1	-40.3
		60	2115.0	19.84	2.0	21.84	62.1	-40.3
		15	2155.0	19.99	2.0	21.99	62.1	-40.1
		30	2155.0	19.96	2.0	21.96	62.1	-40.1
		60	2155.0	20.07	2.0	22.07	62.1	-40.0
		15	2195.0	20.12	2.0	22.12	62.1	-40.0
		30	2195.0	19.91	2.0	21.91	62.1	-40.2
		60	2195.0	20.05	2.0	22.05	62.1	-40.1
	15	15	2117.5	19.18	2.0	21.18	62.1	-40.9
		30	2117.5	20.40	2.0	22.40	62.1	-39.7
		60	2117.5	20.45	2.0	22.45	62.1	-39.7
		15	2155.0	20.44	2.0	22.44	62.1	-39.7
		30	2155.0	20.13	2.0	22.13	62.1	-40.0
		60	2155.0	20.41	2.0	22.41	62.1	-39.7
		15	2192.5	20.22	2.0	22.22	62.1	-39.9
		30	2192.5	20.19	2.0	22.19	62.1	-39.9
		60	2192.5	20.24	2.0	22.24	62.1	-39.9
	20	15	2120.0	19.95	2.0	21.95	62.1	-40.2
		30	2120.0	19.90	2.0	21.90	62.1	-40.2
		60	2120.0	19.91	2.0	21.91	62.1	-40.2
		15	2155.0	20.09	2.0	22.09	62.1	-40.0
		30	2155.0	20.20	2.0	22.20	62.1	-39.9
		60	2155.0	20.18	2.0	22.18	62.1	-39.9
		15	2190.0	20.02	2.0	22.02	62.1	-40.1
		30	2190.0	20.11	2.0	22.11	62.1	-40.0
		60	2190.0	19.87	2.0	21.87	62.1	-40.2

Table 2 RF Power Output 64QAM, Antenna Port 1 SISO

Modulation	Bandwidth	Sub Carrier	Operation Frequency	Reading	Antenna Gain	EIRP	Limit	Margin
	(MHz)	(kHz)	(MHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
256QAM	5	15	2112.5	19.47	2.0	21.47	62.1	-40.6
		30	2112.5	19.71	2.0	21.71	62.1	-40.4
		15	2155.0	20.36	2.0	22.36	62.1	-39.7
		30	2155.0	20.37	2.0	22.37	62.1	-39.7
		15	2197.5	20.05	2.0	22.05	62.1	-40.1
		30	2197.5	20.09	2.0	22.09	62.1	-40.0
	10	15	2115.0	19.84	2.0	21.84	62.1	-40.3
		30	2115.0	19.79	2.0	21.79	62.1	-40.3
		60	2115.0	19.85	2.0	21.85	62.1	-40.3
		15	2155.0	20.15	2.0	22.15	62.1	-40.0
		30	2155.0	20.20	2.0	22.20	62.1	-39.9
		60	2155.0	20.10	2.0	22.10	62.1	-40.0
		15	2195.0	19.96	2.0	21.96	62.1	-40.1
		30	2195.0	20.06	2.0	22.06	62.1	-40.0
		60	2195.0	19.93	2.0	21.93	62.1	-40.2
	15	15	2117.5	20.37	2.0	22.37	62.1	-39.7
		30	2117.5	20.12	2.0	22.12	62.1	-40.0
		60	2117.5	20.54	2.0	22.54	62.1	-39.6
		15	2155.0	20.22	2.0	22.22	62.1	-39.9
		30	2155.0	20.25	2.0	22.25	62.1	-39.9
		60	2155.0	20.48	2.0	22.48	62.1	-39.6
		15	2192.5	20.18	2.0	22.18	62.1	-39.9
		30	2192.5	20.09	2.0	22.09	62.1	-40.0
		60	2192.5	20.22	2.0	22.22	62.1	-39.9
	20	15	2120.0	19.95	2.0	21.95	62.1	-40.2
		30	2120.0	20.13	2.0	22.13	62.1	-40.0
		60	2120.0	20.26	2.0	22.26	62.1	-39.8
		15	2155.0	20.25	2.0	22.25	62.1	-39.9
		30	2155.0	20.31	2.0	22.31	62.1	-39.8
		60	2155.0	20.27	2.0	22.27	62.1	-39.8
		15	2190.0	19.94	2.0	21.94	62.1	-40.2
		30	2190.0	20.40	2.0	22.40	62.1	-39.7
		60	2190.0	20.38	2.0	22.38	62.1	-39.7

Table 3 RF Power Output 256QAM, Antenna Port 1 SISO

Modulation	Bandwidth	Sub Carrier	Operation Frequency	Reading	Antenna Gain	EIRP	Limit	Margin
	(MHz)	(kHz)	(MHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
16QAM	5	15	2112.5	19.89	2.0	21.89	62.1	-40.2
		30	2112.5	20.10	2.0	22.10	62.1	-40.0
		15	2155.0	20.37	2.0	22.37	62.1	-39.7
		30	2155.0	19.89	2.0	21.89	62.1	-40.2
		15	2197.5	20.01	2.0	22.01	62.1	-40.1
		30	2197.5	20.03	2.0	22.03	62.1	-40.1
	10	15	2115.0	19.95	2.0	21.95	62.1	-40.2
		30	2115.0	19.92	2.0	21.92	62.1	-40.2
		60	2115.0	19.97	2.0	21.97	62.1	-40.1
		15	2155.0	19.93	2.0	21.93	62.1	-40.2
		30	2155.0	19.98	2.0	21.98	62.1	-40.1
		60	2155.0	20.01	2.0	22.01	62.1	-40.1
		15	2195.0	20.06	2.0	22.06	62.1	-40.0
		30	2195.0	20.00	2.0	22.00	62.1	-40.1
		60	2195.0	19.97	2.0	21.97	62.1	-40.1
	15	15	2117.5	20.31	2.0	22.31	62.1	-39.8
		30	2117.5	19.94	2.0	21.94	62.1	-40.2
		60	2117.5	20.26	2.0	22.26	62.1	-39.8
		15	2155.0	20.32	2.0	22.32	62.1	-39.8
		30	2155.0	20.36	2.0	22.36	62.1	-39.7
		60	2155.0	19.81	2.0	21.81	62.1	-40.3
		15	2192.5	20.02	2.0	22.02	62.1	-40.1
		30	2192.5	20.40	2.0	22.40	62.1	-39.7
		60	2192.5	20.02	2.0	22.02	62.1	-40.1
	20	15	2120.0	20.00	2.0	22.00	62.1	-40.1
		30	2120.0	20.02	2.0	22.02	62.1	-40.1
		60	2120.0	20.26	2.0	22.26	62.1	-39.8
		15	2155.0	20.31	2.0	22.31	62.1	-39.8
		30	2155.0	20.29	2.0	22.29	62.1	-39.8
		60	2155.0	20.16	2.0	22.16	62.1	-39.9
		15	2190.0	19.92	2.0	21.92	62.1	-40.2
		30	2190.0	20.17	2.0	22.17	62.1	-39.9
		60	2190.0	19.93	2.0	21.93	62.1	-40.2

Table 4 RF Power Output 16QAM, Antenna Port 2 MIMO

Modulation	Bandwidth	Sub Carrier	Operation Frequency	Reading	Antenna Gain	EIRP	Limit	Margin
	(MHz)	(kHz)	(MHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
64QAM	5	15	2112.5	19.75	2.0	21.75	62.1	-40.4
		30	2112.5	20.06	2.0	22.06	62.1	-40.0
		15	2155.0	20.24	2.0	22.24	62.1	-39.9
		30	2155.0	19.98	2.0	21.98	62.1	-40.1
		15	2197.5	19.91	2.0	21.91	62.1	-40.2
		30	2197.5	19.91	2.0	21.91	62.1	-40.2
	10	15	2115.0	19.75	2.0	21.75	62.1	-40.4
		30	2115.0	19.98	2.0	21.98	62.1	-40.1
		60	2115.0	19.80	2.0	21.80	62.1	-40.3
		15	2155.0	20.29	2.0	22.29	62.1	-39.8
		30	2155.0	20.01	2.0	22.01	62.1	-40.1
		60	2155.0	19.99	2.0	21.99	62.1	-40.1
		15	2195.0	20.09	2.0	22.09	62.1	-40.0
		30	2195.0	20.02	2.0	22.02	62.1	-40.1
		60	2195.0	20.04	2.0	22.04	62.1	-40.1
	15	15	2117.5	20.24	2.0	22.24	62.1	-39.9
		30	2117.5	20.05	2.0	22.05	62.1	-40.1
		60	2117.5	20.25	2.0	22.25	62.1	-39.9
		15	2155.0	20.02	2.0	22.02	62.1	-40.1
		30	2155.0	20.37	2.0	22.37	62.1	-39.7
		60	2155.0	20.07	2.0	22.07	62.1	-40.0
		15	2192.5	20.34	2.0	22.34	62.1	-39.8
		30	2192.5	20.12	2.0	22.12	62.1	-40.0
		60	2192.5	20.01	2.0	22.01	62.1	-40.1
	20	15	2120.0	19.92	2.0	21.92	62.1	-40.2
		30	2120.0	19.93	2.0	21.93	62.1	-40.2
		60	2120.0	20.10	2.0	22.10	62.1	-40.0
		15	2155.0	19.99	2.0	21.99	62.1	-40.1
		30	2155.0	19.96	2.0	21.96	62.1	-40.1
		60	2155.0	19.99	2.0	21.99	62.1	-40.1
		15	2190.0	20.05	2.0	22.05	62.1	-40.1
		30	2190.0	20.16	2.0	22.16	62.1	-39.9
		60	2190.0	20.21	2.0	22.21	62.1	-39.9

Table 5 RF Power Output 64QAM, Antenna Port 2 MIMO

Modulation	Bandwidth	Sub Carrier	Operation Frequency	Reading	Antenna Gain	EIRP	Limit	Margin
	(MHz)	(kHz)	(MHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
256QAM	5	15	2112.5	19.83	2.0	21.83	62.1	-40.3
		30	2112.5	19.96	2.0	21.96	62.1	-40.1
		15	2155.0	20.26	2.0	22.26	62.1	-39.8
		30	2155.0	20.07	2.0	22.07	62.1	-40.0
		15	2197.5	19.71	2.0	21.71	62.1	-40.4
		30	2197.5	19.78	2.0	21.78	62.1	-40.3
	10	15	2115.0	19.73	2.0	21.73	62.1	-40.4
		30	2115.0	19.84	2.0	21.84	62.1	-40.3
		60	2115.0	20.19	2.0	22.19	62.1	-39.9
		15	2155.0	20.03	2.0	22.03	62.1	-40.1
		30	2155.0	20.35	2.0	22.35	62.1	-39.8
		60	2155.0	20.19	2.0	22.19	62.1	-39.9
		15	2195.0	19.75	2.0	21.75	62.1	-40.4
		30	2195.0	19.96	2.0	21.96	62.1	-40.1
		60	2195.0	19.78	2.0	21.78	62.1	-40.3
	15	15	2117.5	20.24	2.0	22.24	62.1	-39.9
		30	2117.5	20.04	2.0	22.04	62.1	-40.1
		60	2117.5	20.11	2.0	22.11	62.1	-40.0
		15	2155.0	20.34	2.0	22.34	62.1	-39.8
		30	2155.0	20.39	2.0	22.39	62.1	-39.7
		60	2155.0	20.42	2.0	22.42	62.1	-39.7
		15	2192.5	20.32	2.0	22.32	62.1	-39.8
		30	2192.5	20.03	2.0	22.03	62.1	-40.1
		60	2192.5	19.98	2.0	21.98	62.1	-40.1
	20	15	2120.0	19.92	2.0	21.92	62.1	-40.2
		30	2120.0	19.78	2.0	21.78	62.1	-40.3
		60	2120.0	20.29	2.0	22.29	62.1	-39.8
		15	2155.0	19.95	2.0	21.95	62.1	-40.2
		30	2155.0	20.24	2.0	22.24	62.1	-39.9
		60	2155.0	20.31	2.0	22.31	62.1	-39.8
		15	2190.0	20.01	2.0	22.01	62.1	-40.1
		30	2190.0	20.31	2.0	22.31	62.1	-39.8
		60	2190.0	20.13	2.0	22.13	62.1	-40.0

Table 6 RF Power Output 256QAM, Antenna Port 2 MIMO



Figure 7: 16QAM 5MHz B.W.; 2112.5MHz, 15kHz

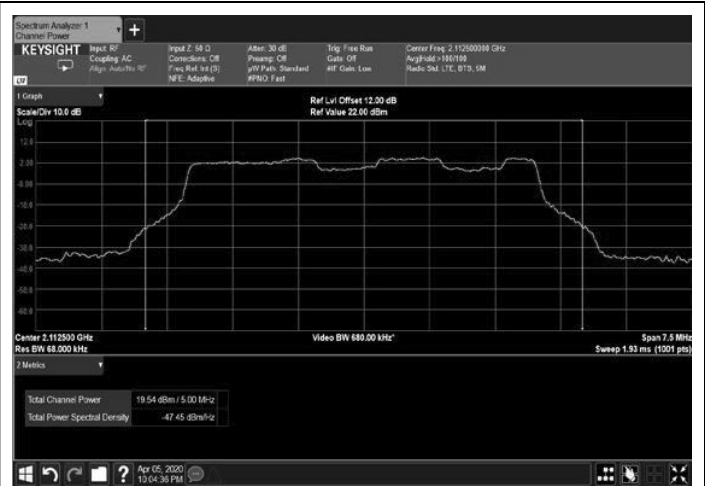


Figure 8: 16QAM 5MHz B.W.; 2112.5MHz, 30kHz

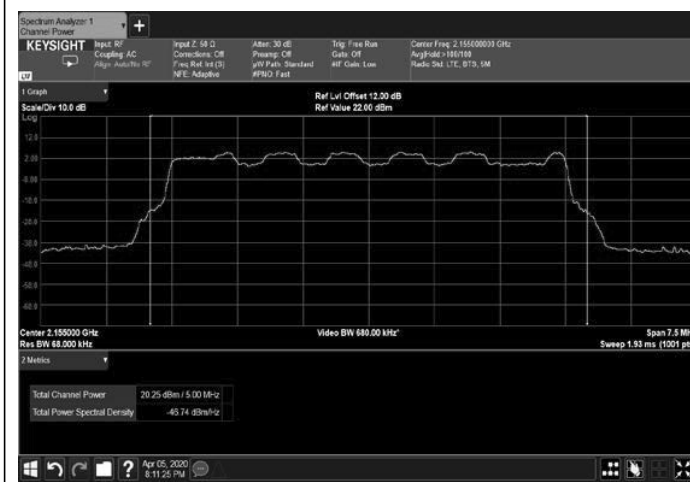


Figure 9: 16QAM 5MHz B.W.; 2155.0MHz, 15kHz

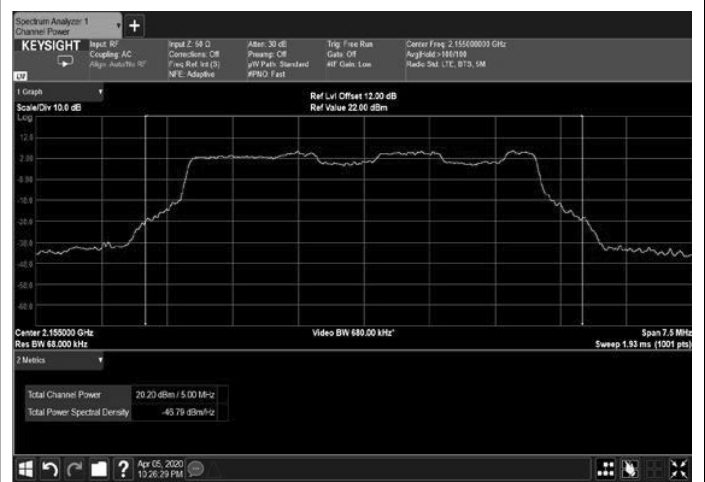


Figure 10: 16QAM 5MHz B.W.; 2155.0MHz, 30kHz



Figure 11: 16QAM 5MHz B.W.; 2197.5MHz, 15kHz

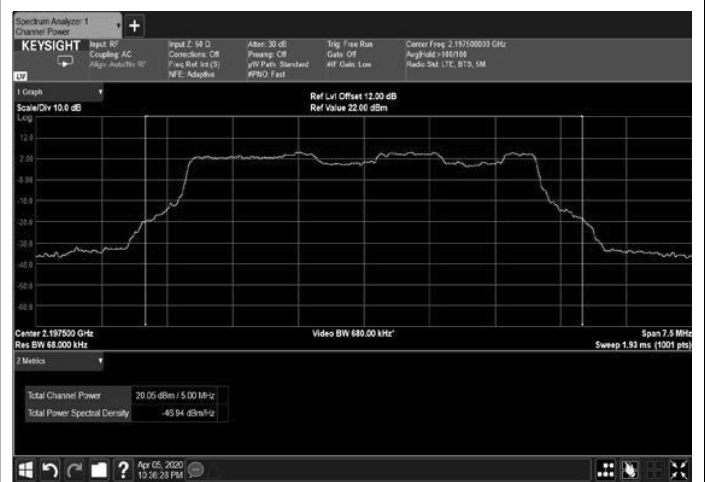


Figure 12: 16QAM 5MHz B.W.; 2197.5MHz, 30kHz



Figure 13: 16QAM 10MHz B.W.; 2115.0MHz, 15kHz



Figure 14: 16QAM 10MHz B.W.; 2115.0MHz, 30kHz



Figure 15: 16QAM 10MHz B.W.; 2115.0MHz, 60kHz

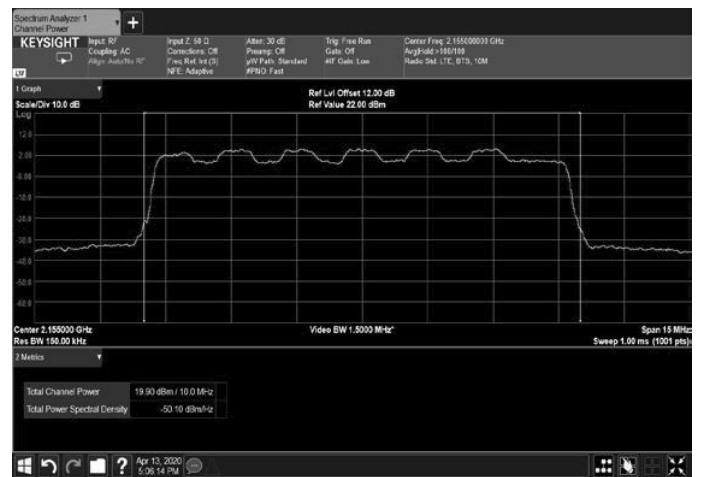


Figure 16: 16QAM 10MHz B.W.; 2155.0MHz, 15kHz



Figure 17: 16QAM 10MHz B.W.; 2155.0MHz, 30kHz

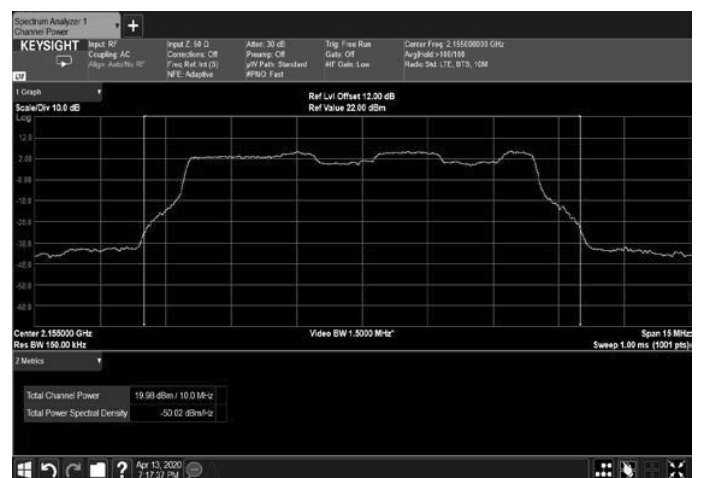


Figure 18: 16QAM 10MHz B.W.; 2155.0MHz, 60kHz

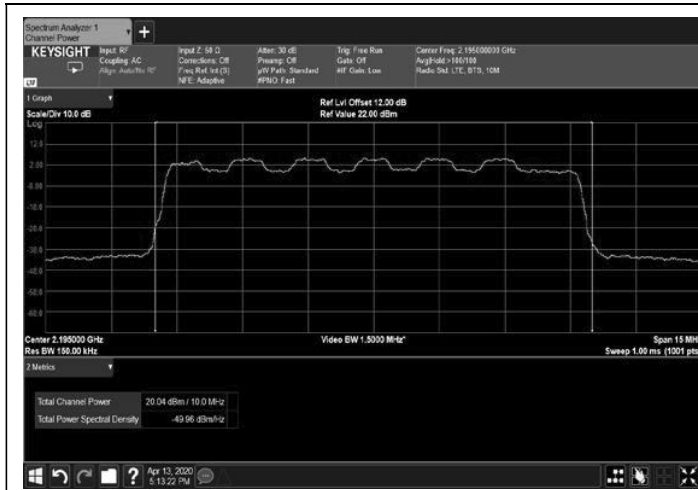


Figure 19: 16QAM 10MHz B.W.; 2195.0MHz, 15kHz



Figure 20: 16QAM 10MHz B.W.; 2195.0MHz, 30kHz



Figure 21: 16QAM 10MHz B.W.; 2195.0MHz, 60kHz



Figure 22: 16QAM 15MHz B.W.; 2117.5MHz, 15kHz



Figure 23: 16QAM 15MHz B.W.; 2117.5MHz, 30kHz

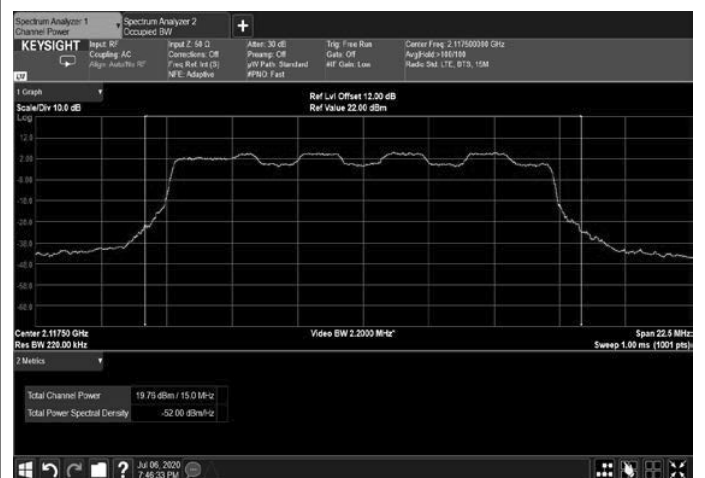


Figure 24: 16QAM 15MHz B.W.; 2117.5MHz, 60kHz



Figure 25: 16QAM 15MHz B.W.; 2155.0MHz, 15kHz



Figure 26: 16QAM 15MHz B.W.; 2155.0MHz, 30kHz

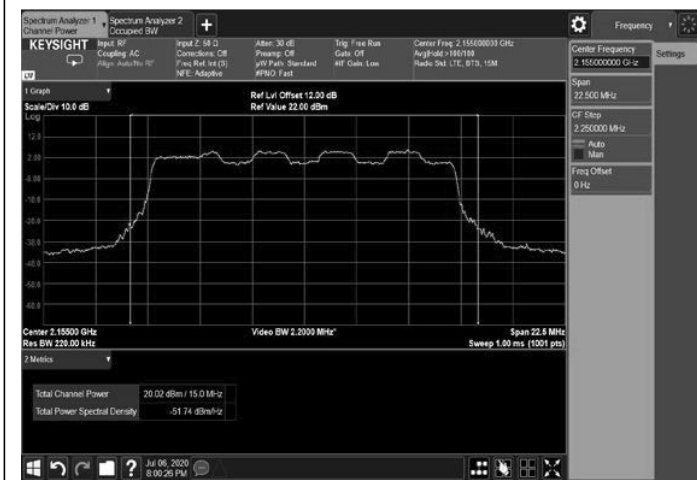


Figure 27: 16QAM 15MHz B.W.; 2155.0MHz, 60kHz

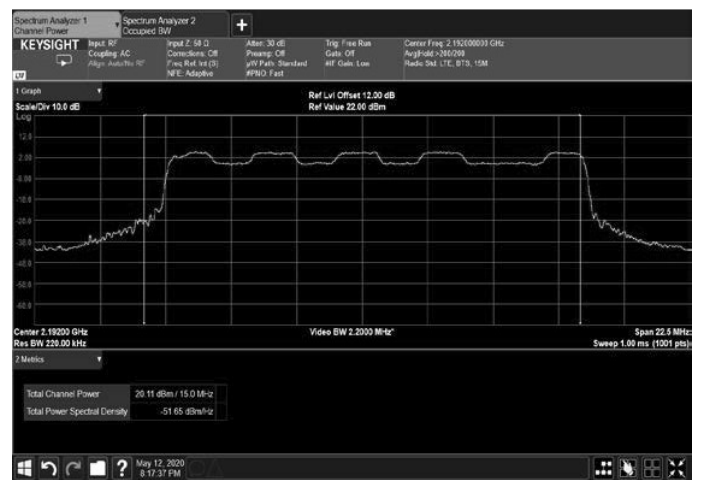


Figure 28: 16QAM 15MHz B.W.; 2192.0MHz, 15kHz



Figure 29: 16QAM 15MHz B.W.; 2192.0MHz, 30kHz

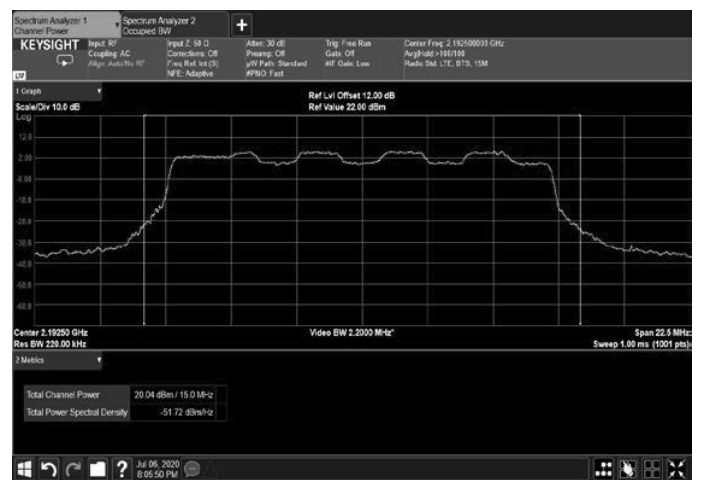


Figure 30: 16QAM 15MHz B.W.; 2192.0MHz, 60kHz



Figure 31: 16QAM 20MHz B.W.; 2120.0MHz, 15kHz

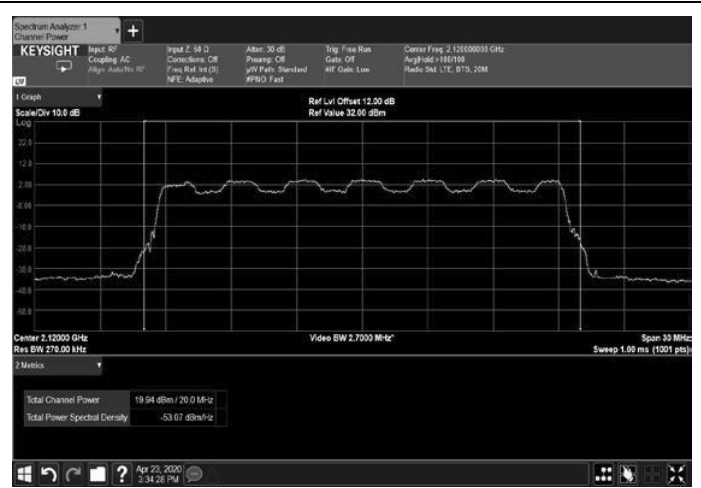


Figure 32: 16QAM 20MHz B.W.; 2120.0MHz, 30kHz



Figure 33: 16QAM 20MHz B.W.; 2120.0MHz, 60kHz



Figure 34: 16QAM 20MHz B.W.; 2155.0MHz, 15kHz



Figure 35: 16QAM 20MHz B.W.; 2155.0MHz, 30kHz



Figure 36: 16QAM 20MHz B.W.; 2155.0MHz, 60kHz

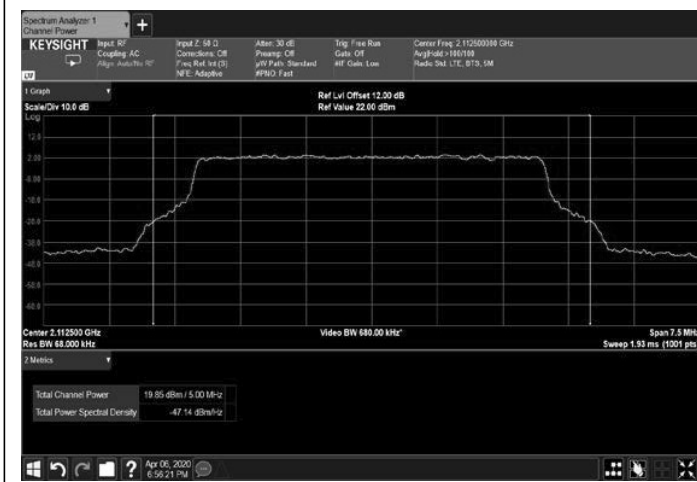




Figure 43: 64QAM 5MHz B.W.; 2155.0MHz, 30kHz



Figure 44: 64QAM 5MHz B.W.; 2197.5MHz, 15kHz



Figure 45: 64QAM 5MHz B.W.; 2197.5MHz, 30kHz



Figure 46: 64QAM 10MHz B.W.; 2115.0MHz, 15kHz

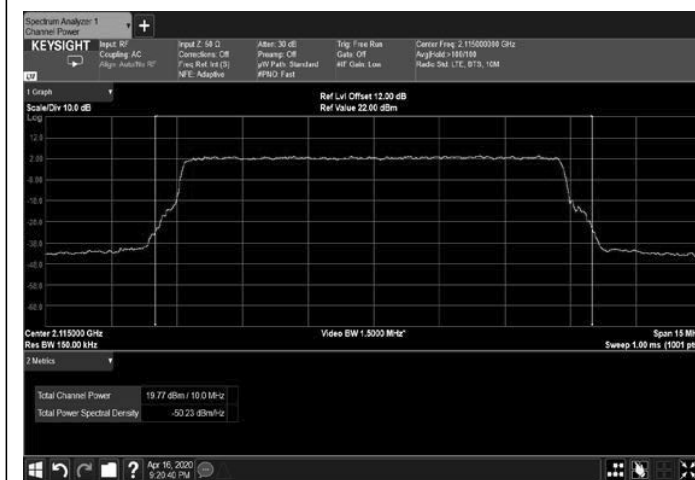


Figure 47: 64QAM 10MHz B.W.; 2115.0MHz, 30kHz



Figure 48: 64QAM 10MHz B.W.; 2115.0MHz, 60kHz



Figure 49: 64QAM 10MHz B.W.; 2155.0MHz, 15kHz



Figure 50: 64QAM 10MHz B.W.; 2155.0MHz, 30kHz



Figure 51: 64QAM 10MHz B.W.; 2155.0MHz, 60kHz



Figure 52: 64QAM 10MHz B.W.; 2195.0MHz, 15kHz



Figure 53: 64QAM 10MHz B.W.; 2195.0MHz, 30kHz

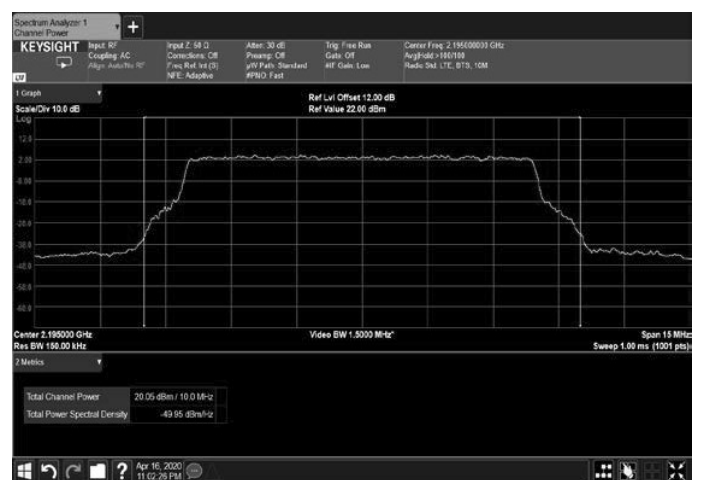
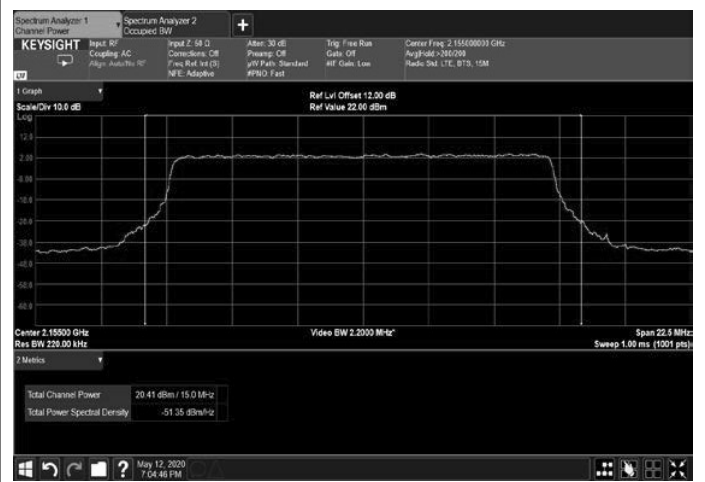
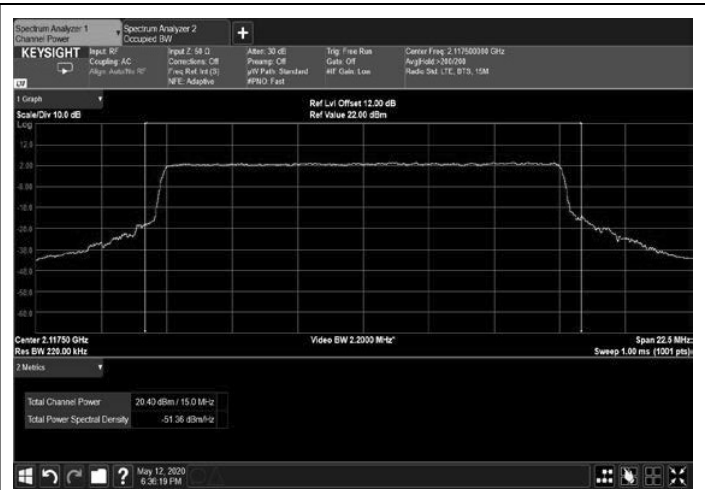
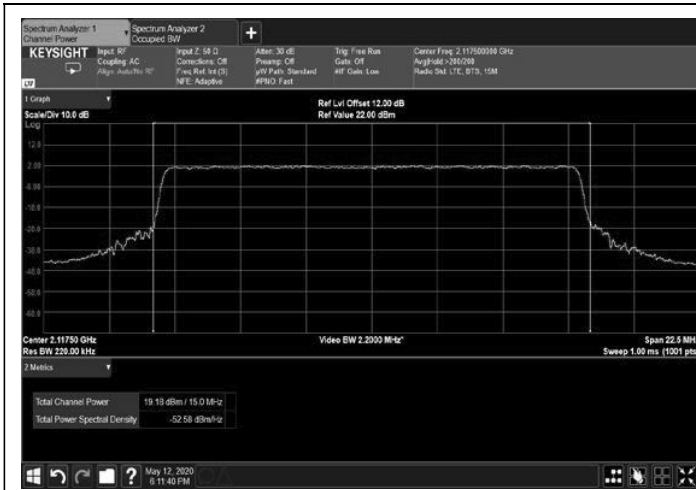


Figure 54: 64QAM 10MHz B.W.; 2195.0MHz, 60kHz



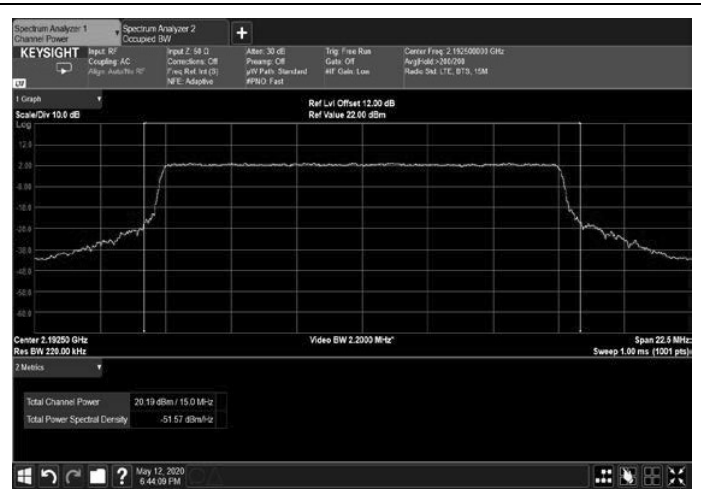
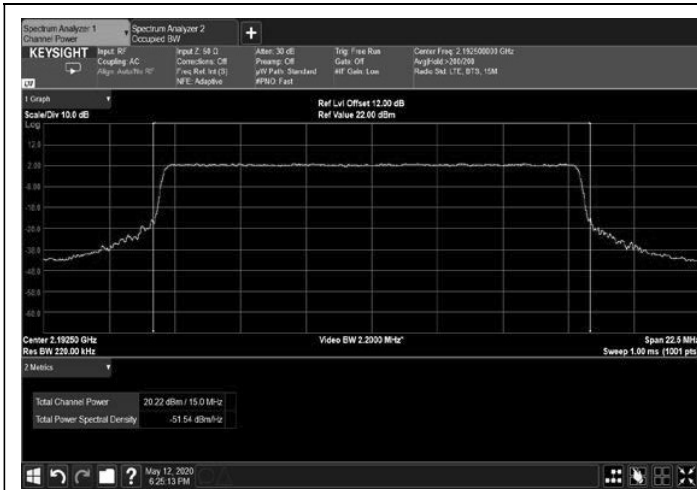






Figure 73: 256QAM 20MHz B.W.; 2112.5MHz, 15kHz

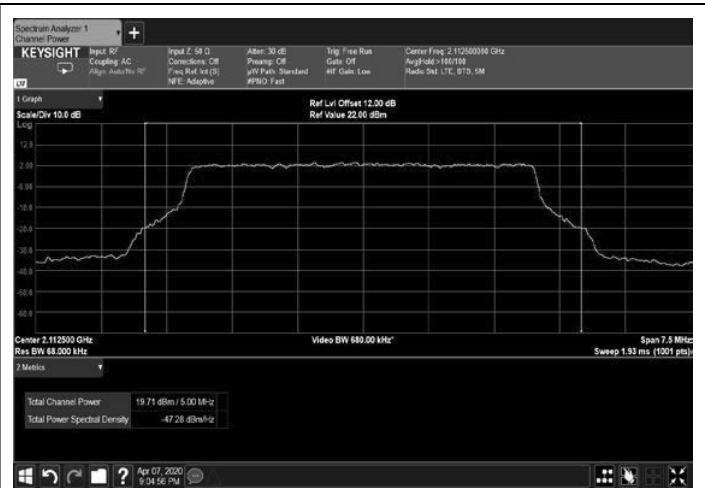


Figure 74: 256QAM 5MHz B.W.; 2112.5MHz, 30kHz



Figure 75: 256QAM 5MHz B.W.; 2155.0MHz, 15kHz

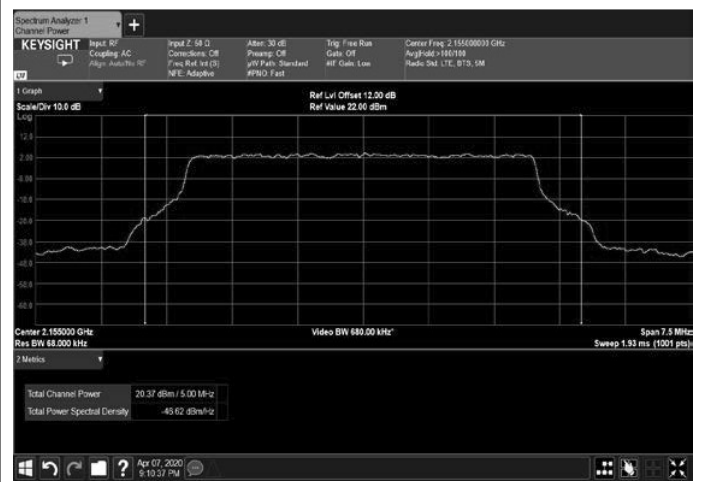


Figure 76: 256QAM 5MHz B.W.; 2115.0MHz, 30kHz



Figure 77: 256QAM 5MHz B.W.; 2179.5MHz, 15kHz

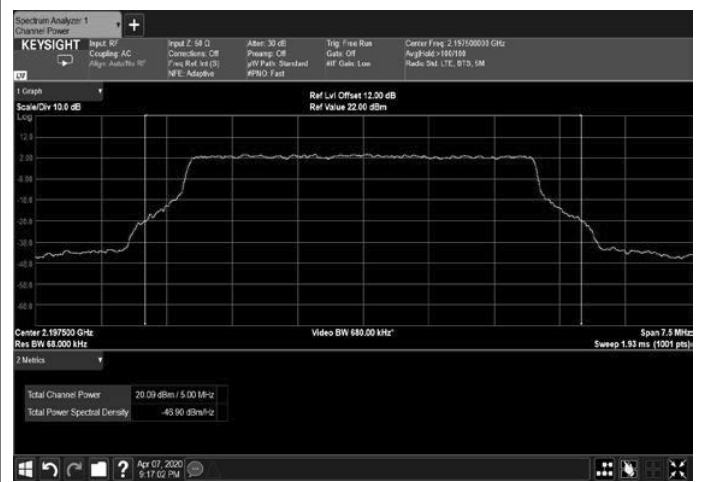


Figure 78: 256QAM 5MHz B.W.; 2179.5MHz, 30kHz

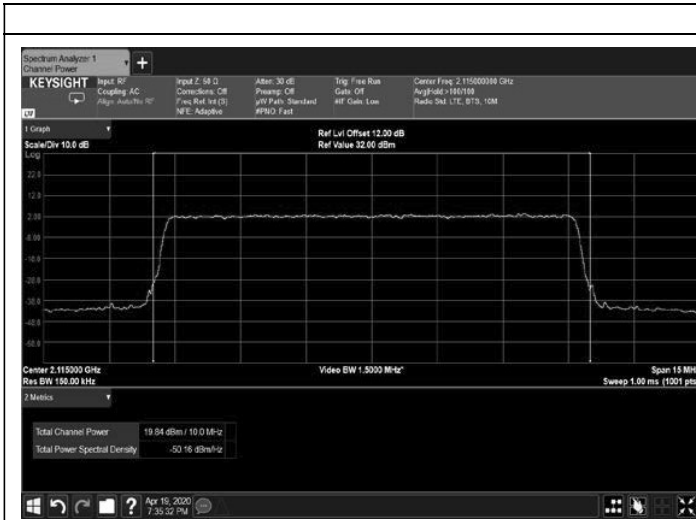


Figure 79: 256QAM 10MHz B.W.; 2115.0MHz, 15kHz

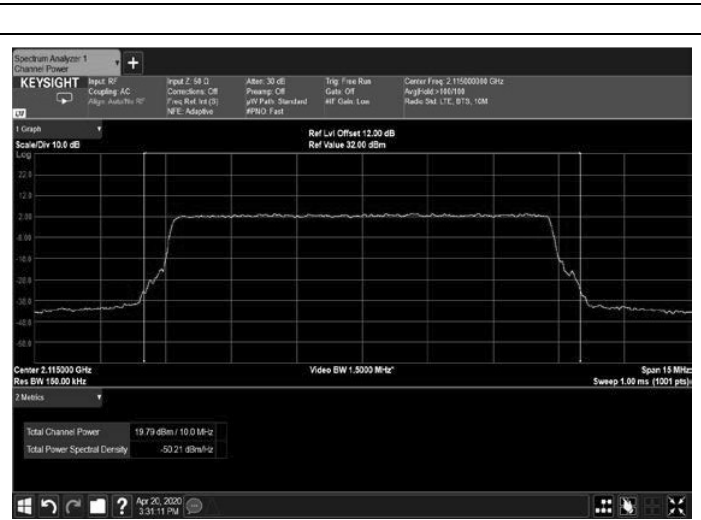


Figure 80: 256QAM 10MHz B.W.; 2115.0MHz, 30kHz



Figure 81: 256QAM 10MHz B.W.; 2115.0MHz, 60kHz



Figure 82: 256QAM 10MHz B.W.; 2155.0MHz, 15Hz



Figure 83: 256QAM 10MHz B.W.; 2115.0MHz, 30kHz



Figure 84: 256QAM 10MHz B.W.; 2115.0MHz, 60kHz

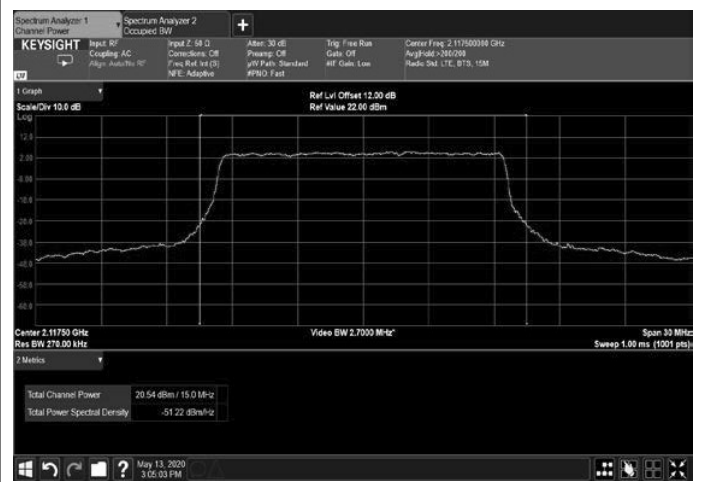
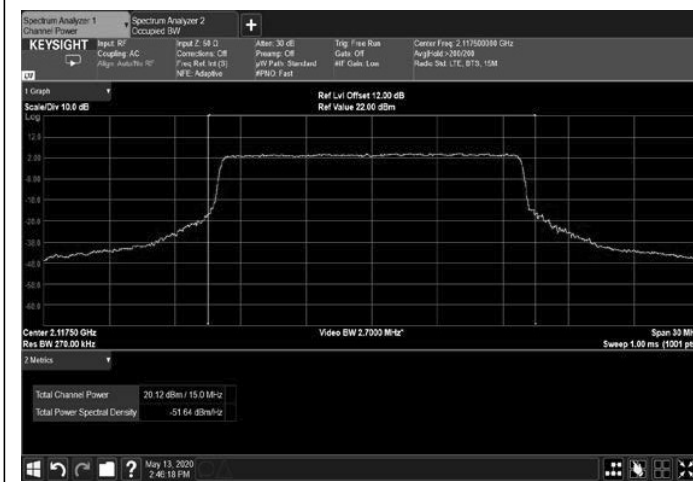
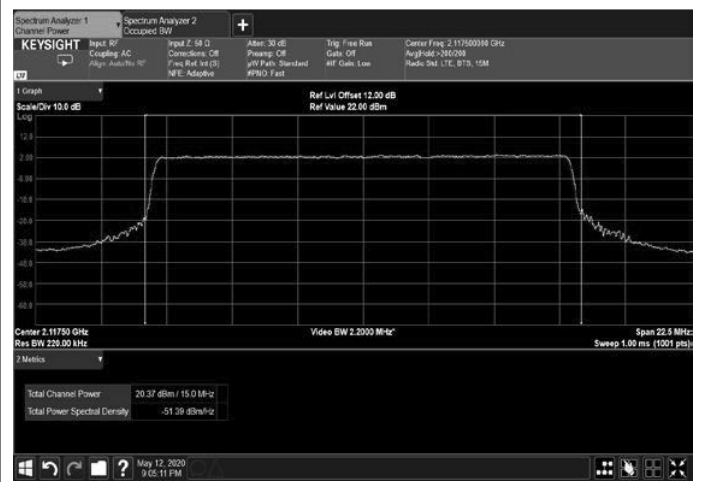




Figure 91: 256QAM 15MHz B.W.; 2155.0MHz, 15kHz



Figure 92: 256QAM 15MHz B.W.; 2155.0MHz, 30kHz



Figure 93: 256QAM 15MHz B.W.; 2155.0MHz, 60kHz

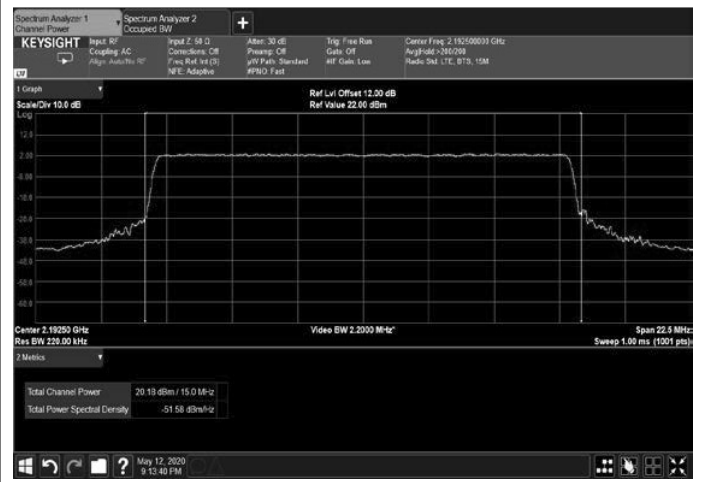


Figure 94: 256QAM 15MHz B.W.; 2192.5MHz, 15Hz

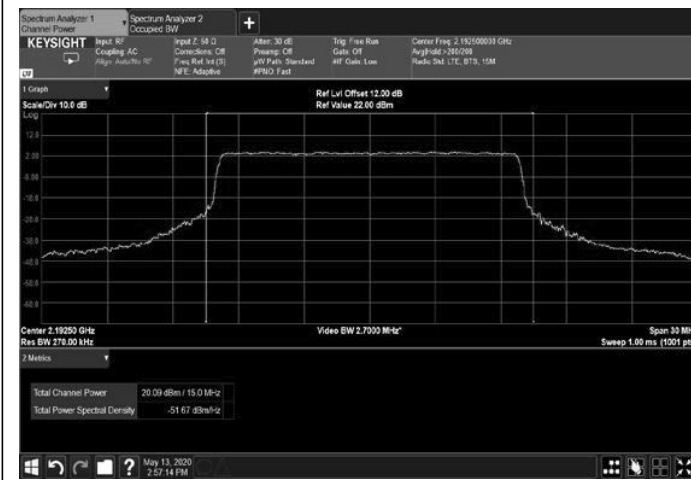


Figure 95: 256QAM 15MHz B.W.; 2192.5MHz, 30kHz

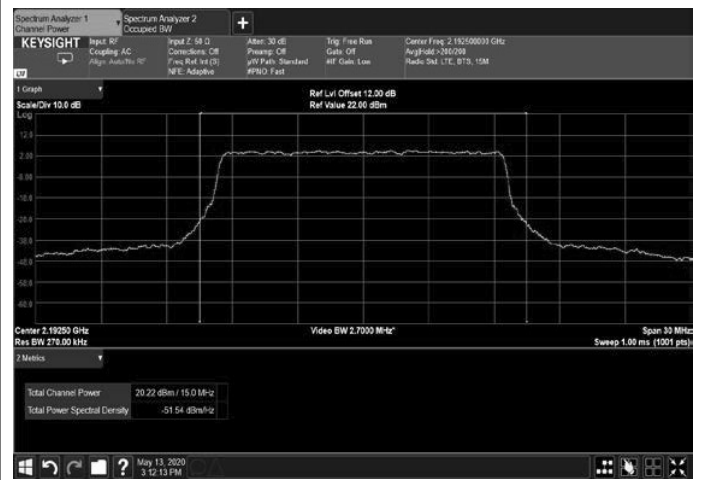


Figure 96: 256QAM 10MHz B.W.; 2192.5MHz, 60kHz

