



ISRAEL TESTING LABORATORIES
Global Certifications You Can Trust



DATE: 16 February 2016

I.T.L. (PRODUCT TESTING) LTD.
FCC Radio Test Report
for
**Corning Optical Communication
Wireless**

Equipment under test:

ONE- Optical Network Evolution DAS

**RAU-5x Remote Antenna Unit PN:
RAU5xUS/RAU5xUS-A**

**ESMR-CELL-PCS-LTE-AWS
(ESMR-CELL-PCS Section)**

Tested by:


M. Zohar

Approved by:


D. Shidlow

This report must not be reproduced, except in full, without the written
permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.



ISRAEL TESTING LABORATORIES
Global Certifications You Can Trust



Measurement/Technical Report for Corning Optical Communication Wireless ONE- Optical Network Evolution DAS

FCC ID: OJF1RAU5X

This report concerns:

Original Grant: X

Class II change:

Class I change:

Equipment type:

PCS Licensed Transmitter

Limits used:

47CFR Parts 2, 22, 24, 27, 90

Measurement procedure used is ANSI C63.4-2014, KDB 971168 D01 and KDB 935210.

Substitution Method used as in ANSI/TIA-603-C: 2004

Application for Certification

prepared by:

R. Pinchuck

ITL (Product Testing) Ltd.

1 Bat Sheva St.

Lod 7120101

Israel

e-mail rpinchuck@itl.co.il

Applicant for this device:

(different from "prepared by")

Habib Riazi

Corning Optical Communication Wireless

13221 Woodland Park Rd., Suite #400

Herndon, VA. 20171

U.S.A.

Tel: +1-541-758-2880

Fax: +1-703-848-0260

e-mail: RiaziH@corning.com



TABLE OF CONTENTS

1. GENERAL INFORMATION	5
1.1 Administrative Information	5
1.2 List of Accreditations	6
1.3 Product Description	7
1.4 Test Methodology	8
1.5 Test Facility	8
1.6 Measurement Uncertainty	8
2. SYSTEM TEST CONFIGURATION	9
2.1 Justification	9
2.2 EUT Exercise Software	9
2.3 Special Accessories	9
2.4 Equipment Modifications	9
2.5 Configuration of Tested System	10
3. TEST SET-UP PHOTOS	11
4. PEAK OUTPUT POWER (CELL)	14
4.1 Test Specification	14
4.2 Test Procedure	14
4.3 Test Results	14
4.4 Test Equipment Used; Peak Output Power (CELL)	20
5. OCCUPIED BANDWIDTH (CELL)	21
5.1 Test Specification	21
5.2 Test Procedure	21
5.3 Test Results	22
5.4 Test Equipment Used; Occupied Bandwidth CELL	32
6. OUT OF BAND EMISSIONS AT ANTENNA TERMINALS (CELL)	33
6.1 Test Specification	33
6.2 Test Procedure	33
6.3 Test Results	33
6.4 Test Equipment Used; Out of Band Emission at Antenna Terminals CELL	37
7. BAND EDGE SPECTRUM (CELL)	38
7.1 Test Specification	38
7.2 Test Procedure	38
7.3 Test Results	39
7.4 Test Equipment Used; Band Edge Spectrum CELL	43
8. OUT OF BAND EMISSIONS (RADIATED) (CELL)	44
8.1 Test Specification	44
8.2 Test Procedure	44
8.3 Test Results	45
8.4 Test Instrumentation Used, Radiated Measurements CELL	46
9. PEAK OUTPUT POWER (ESMR)	47
9.1 Test Specification	47
9.2 Test Procedure	47
9.3 Test Results	47
9.4 Test Equipment Used; Peak Power (ESMR)	51
10. OCCUPIED BANDWIDTH (ESMR)	52
10.1 Test Specification	52
10.2 Test Procedure	52
10.3 Test Results	52
10.4 Test Equipment Used; Occupied Bandwidth (ESMR)	59



11.	OUT OF BAND EMISSIONS AT ANTENNA TERMINALS (ESMR) -----	60
11.1	Test Specification	60
11.2	Test Procedure	60
11.3	Test Results	60
11.4	Test Equipment Used; Out of Band Emissions at Antenna Terminals (ESMR).....	64
12.	BAND EDGE SPECTRUM (ESMR) -----	65
12.1	Test Specification	65
12.2	Test Procedure	65
12.3	Test Results	65
12.4	Test Equipment Used; Band Edge Spectrum ESMR	69
13.	OUT OF BAND EMISSIONS (RADIATED) (ESMR)-----	70
13.1	Test Specification	70
13.2	Test Procedure	70
13.3	Test Results	71
13.4	Test Equipment Used; Out of Band Emissions (Radiated) (ESMR)	72
14.	PEAK OUTPUT POWER (PCS) -----	73
14.1	Test Specification	73
14.2	Test Procedure	73
14.3	Test Results	73
14.4	Test Equipment Used; Peak Output Power PCS	79
15.	OCCUPIED BANDWIDTH (PCS) -----	80
15.1	Test Specification	80
15.2	Test Procedure	80
15.3	Test Results	81
15.4	Test Equipment Used; Occupied Bandwidth PCS	91
16.	OUT OF BAND EMISSIONS AT ANTENNA TERMINALS (PCS)-----	92
16.1	Test Specification	92
16.2	Test procedure	92
16.3	Test Results	92
16.4	Test Equipment Used; Out of Band Emission at Antenna Terminals PCS.....	96
17.	BAND EDGE SPECTRUM (PCS) -----	97
17.1	Test Specification	97
17.2	Test Procedure	97
17.1	Test Results	97
17.2	Test Equipment Used; Band Edge Spectrum PCS	101
18.	OUT OF BAND EMISSIONS (RADIATED) (PCS) -----	102
18.1	Test Specification	102
18.2	Test Procedure	102
18.3	Results Table	103
18.4	Test Instrumentation Used, Radiated Measurements (PCS)	104
19.	APPENDIX A - CORRECTION FACTORS -----	105
19.1	Correction factors for CABLE	105
19.2	Correction factors for Double Ridged Waveguide Horn ANTENNA	106
19.3	Correction factors for Horn ANTENNA	107
19.4	Correction factors for Biconical Antenna.....	108
19.5	Correction factors for Log Periodic	109
19.6	Correction factors for Active Loop Antenna	110



1. General Information

1.1 Administrative Information

Manufacturer:	Corning Optical Communication Wireless
Manufacturer's Address:	13221 Woodland Park Rd., Suite #400 Herndon, VA. 20171, U.S.A. Tel: +1-541-758-2880 Fax: +1-703-848-0260
Manufacturer's Representative:	Habib Riazi
Equipment Under Test (E.U.T):	ONE- Optical Network Evolution DAS
Equipment Model No.:	RAU-5x Remote Antenna Unit PN: RAU5xUS/RAU5xUS-A
Equipment Serial No.:	Not Designated
Date of Receipt of E.U.T:	29 November 2015
Start of Test:	29 November 2015
End of Test:	10 December 2015
Test Laboratory Location:	I.T.L (Product Testing) Ltd. 1 Batsheva St, Lod, Israel 7116002
Test Specifications:	FCC Parts 22, 24, 27, 90



1.2 List of Accreditations

The EMC laboratory of I.T.L. is accredited by/registered with the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), FCC Designation Number IL1005.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-3006, R-2729, T-1877, G-245.
5. Industry Canada (Canada), IC File No.: 46405-4025; Site Nos. IC 4025A-1, IC 4025A-2.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.

1.3 Product Description

The Optical Network Platform (ONE™) by Corning provides a flexible in-building RF and network digital coverage solution based on a fiber optic transport backbone.

The fiber-optics infrastructure is easily deployable via a wide range of pre-terminated composite cables and advanced end-to-end equipment. Easy to design, Plug and Play™ connectors, significantly reduce installation cost and deployment time.

The ONE™ solution is an ideal fit for large, high-rise or campus-style deployments. It generates significant CAPEX savings and OPEX savings through the use of user configurable sectorization and an infrastructure that is simple to deploy and efficient in usage.

Dynamic sectorization management allows precise service distribution control to meet changing density needs, and provides further savings by enabling sharing of equipment at various levels for service providers.

Radio source agnostic, remote units can be used as network extenders. Ethernet capability with dedicated fiber link for Wi-Fi offload brings a higher level of granularity and support for devices and applications with very high speed requirements.

Model name	RAU5x ONE wireless platform
Working voltage	48VDC
Mode of operation	DAS Remote Unit
Modulations	ESMR/CELL/PCS/AWS bands: GSM,WCDMA,LTE LTE700 band: QPSK,16QAM,64QAM
Frequency Range	ESMR: 862M-869M CELL: 869M-894M PCS: 1930M-1995M LTE : 728M-758M AWS: 2110M-2180M
Transmit power	ESMR/CELL/LTE: ~15dBm PCS/AWS: ~20dBm
Antenna Gain	12.5dBi
DATA rate	N/A
Modulation BW	GSM: 500KHz WCDMA: 5MHz LTE: 10MHz/5MHz(for ESMR band)
Temperature (°C)/ Humidity (%RH)	26°C / 35%



1.4 Test Methodology

Both conducted and radiated testing were performed according to the procedures in KDB 971168 D01, KDB 935210 and ANSI C63.4: 2014. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.5 Test Facility

Both conducted and radiated emissions tests were performed at I.T.L.'s testing facility in Lod, Israel. I.T.L.'s EMC Laboratory is accredited by A2LA, certificate No. 1152.01 and its FCC Designation Number is IL1005.

1.6 Measurement Uncertainty

Radiated Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4) for open site 30-1000MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 4.98 dB

2. System Test Configuration

2.1 *Justification*

The test setup was configured to closely resemble the standard installation.
The EUT consists of the HEU, the OIU and the RAU5x.
All source signals are represented in the setup by appropriate signal generators.
An “Exercise” SW on the computer was used to enable / disable transmission of the RAU5x, while the EUT output was connected to the spectrum analyzer.
All channels transmitted during the testing.
There is neither an intermediate amplified nor donor antenna in the uplink.
All components included in the UL path are connected by cables.

2.2 *EUT Exercise Software*

HCM_2.0 Build2 RC1
ACM_2a00_18_01.bin
RMM_5a00_18_01.bin
OIM_7a03_18_01.bin
RAU5_9a64_18_03.bin

2.3 *Special Accessories*

No special accessories were needed in order to achieve compliance.

2.4 *Equipment Modifications*

No modifications were needed in order to achieve compliance.

2.5 Configuration of Tested System

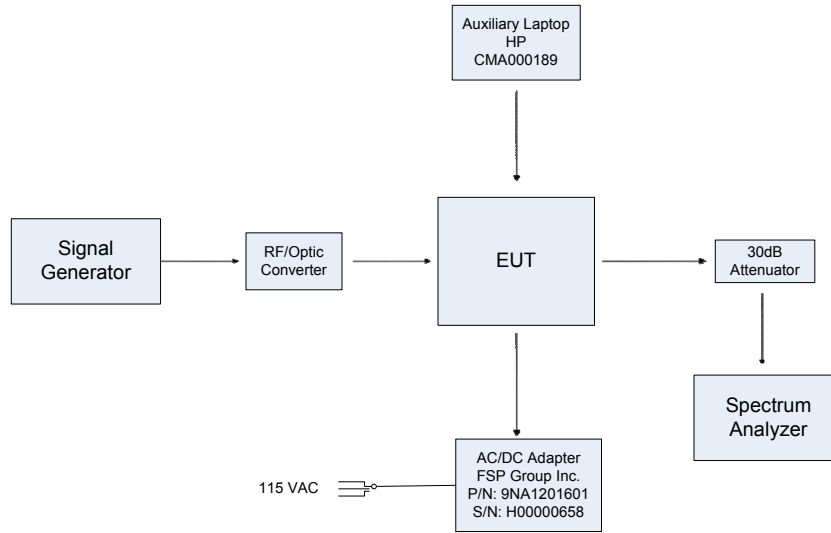


Figure 1. Test Set-Up Conducted

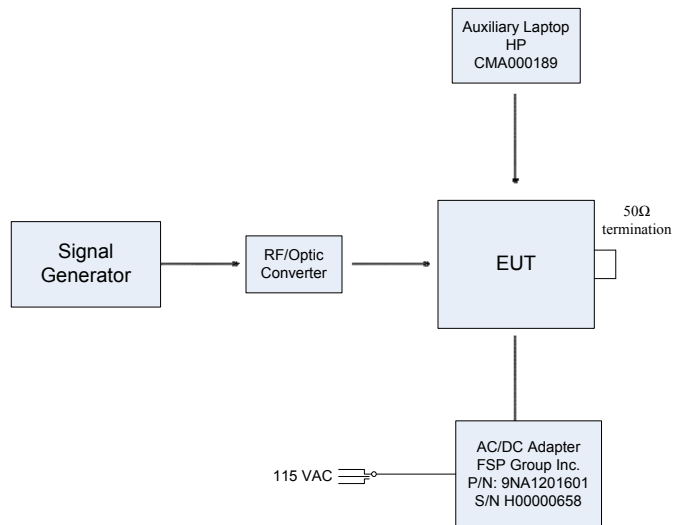


Figure 2. Test Set-Up Radiated

3. Test Set-Up Photos

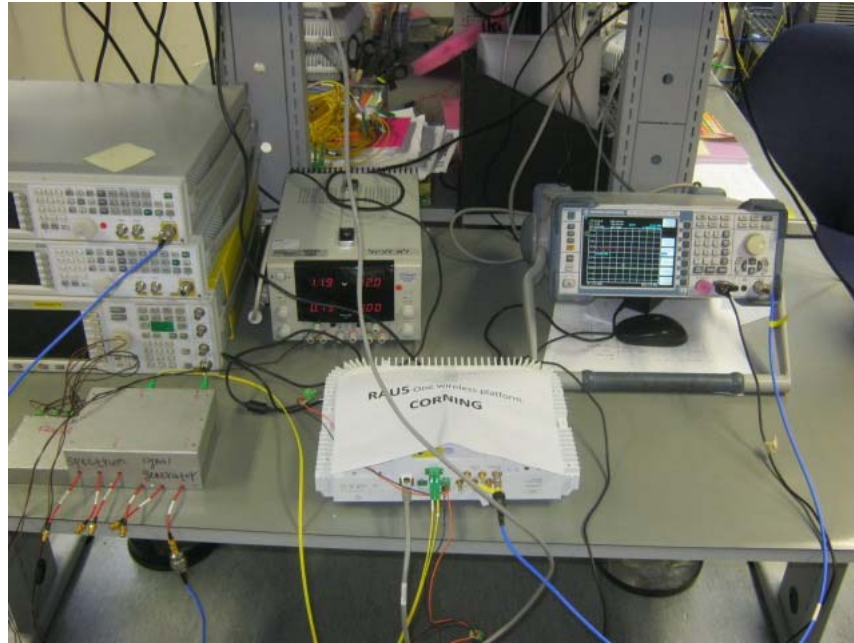


Figure 3. Conducted Emission From Antenna Port Tests



Figure 4. Radiated Emission Test



Figure 5. Radiated Emission Test



Figure 6. Radiated Emission Test



Figure 7. Radiated Emission Test

4. Peak Output Power (CELL)

4.1 Test Specification

FCC Part 22.913(a)

4.2 Test Procedure

Peak Power Output must not exceed 500 Watts (57dBm).

The E.U.T. antenna terminal was connected to the Spectrum Analyzer through an external attenuator and an appropriate coaxial cable (loss=30.5 dB). The E.U.T. RF output was modulated. RBW was set to 1%-5% from the OBW. Special attention was taken to prevent Spectrum Analyzer RF input overload. The E.U.T was evaluated at the low, mid and high channels (874.0, 8881.0 and 889.0) of the 3 modulations: LTE 64QAM, GSM, WCDMA.

4.3 Test Results

Modulation	Operation Frequency (MHz)	Reading (dBm)	Specification (dBm)	Margin (dB)
LTE 64QAM	874.0	16.1	57.00	-40.9
	881.0	16.7	57.00	-40.3
	889.0	16.7	57.00	-40.3
GSM	870.2	16.4	57.00	-40.6
	881.0	15.3	57.00	-41.7
	892.8	16.5	57.00	-40.5
WCDMA	871.5	16.1	57.00	-40.9
	881.0	16.5	57.00	-40.5
	891.5	16.8	57.00	-40.2

Figure 8 Peak Output Power CELL

See additional information in *Figure 9 to Figure 17*.

JUDGEMENT: Passed by 40.2 dB

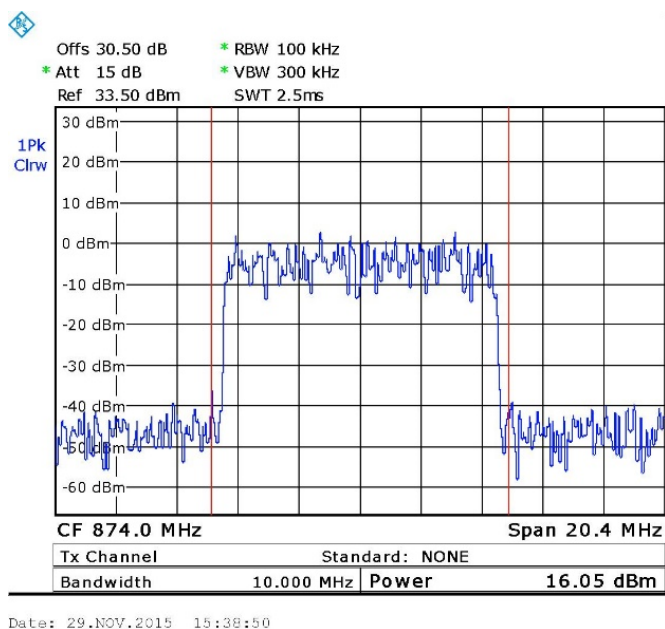


Figure 9. LTE 64QAM - 874.00 MHz

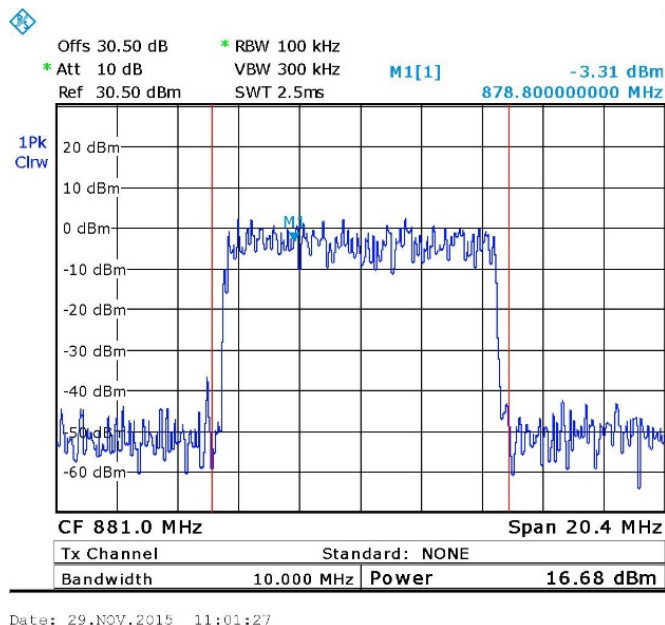


Figure 10. LTE 64QAM - 881.00 MHz

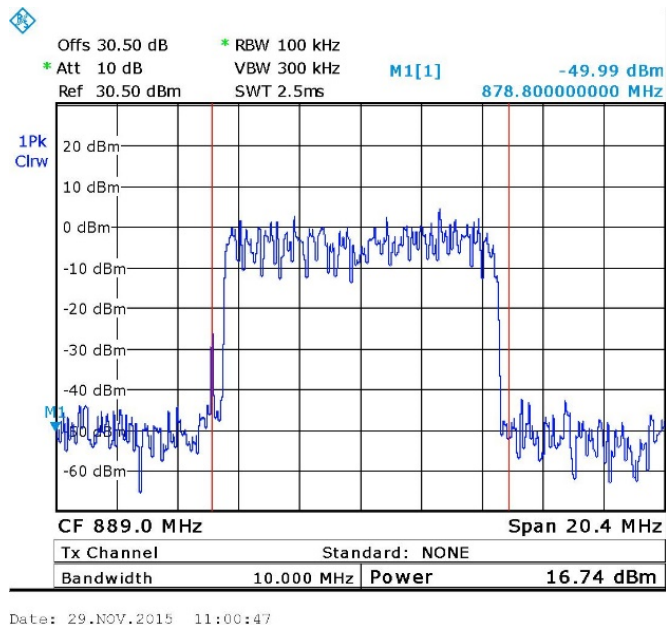


Figure 11. LTE 64QAM - 889.0 MHz

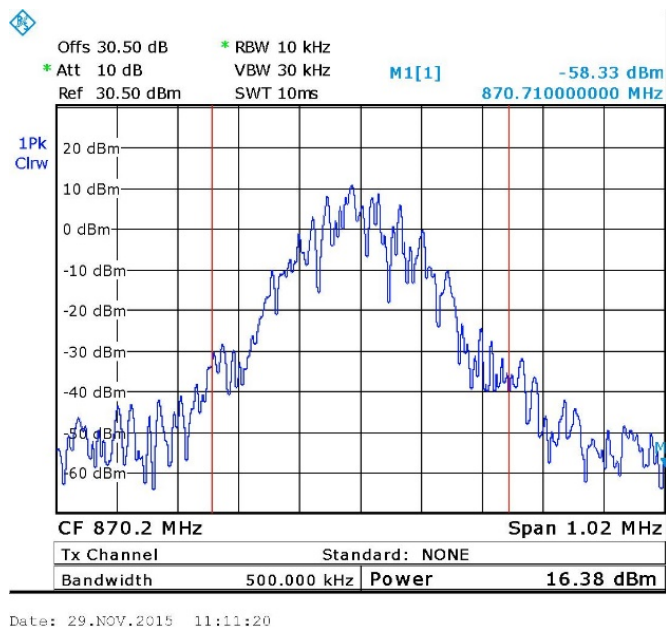


Figure 12. GSM - 870.2 MHz

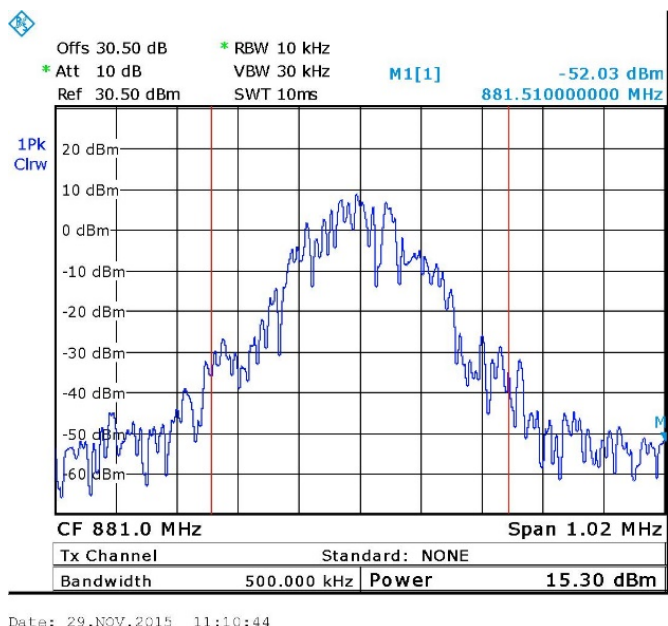


Figure 13. GSM - 881.0 MHz

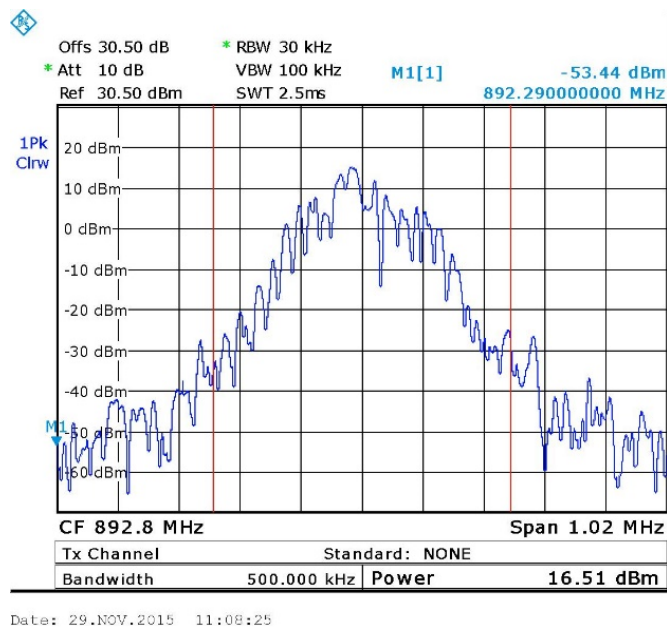


Figure 14. GSM - 892.8 MHz

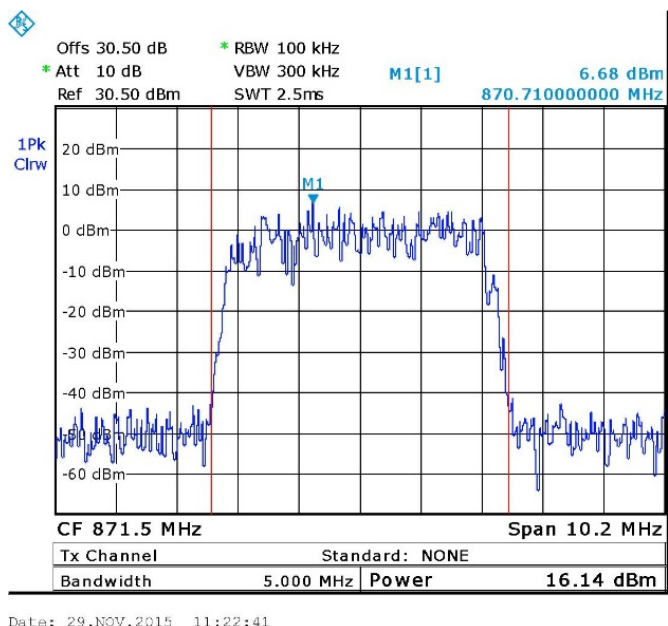


Figure 15. W-CDMA - 871.5 MHz

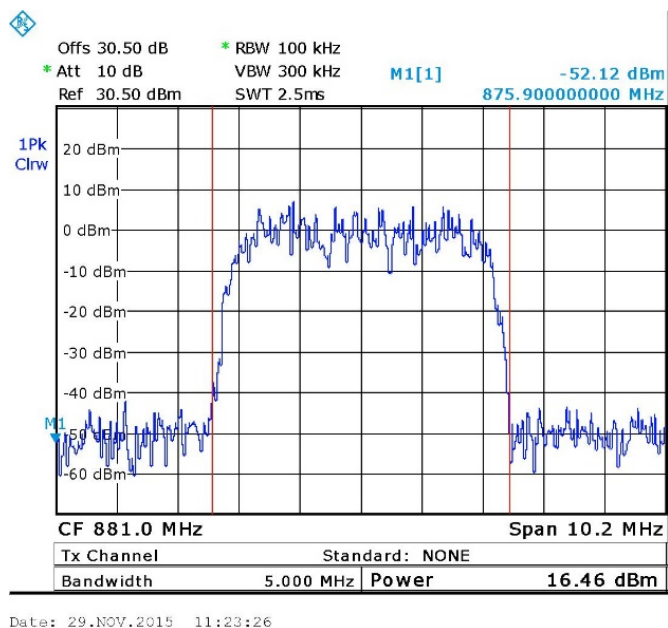


Figure 16. W-CDMA - 881.0 MHz

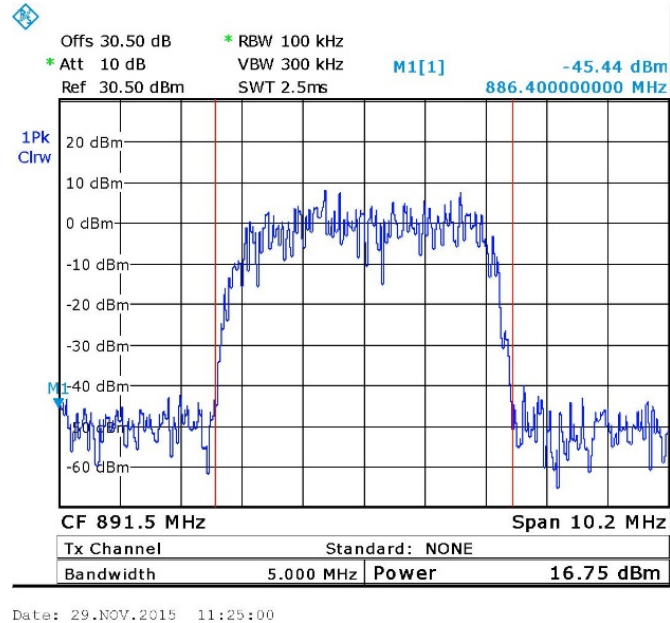


Figure 17. W-CDMA - 891.5 MHz



4.4 Test Equipment Used; Peak Output Power (CELL)

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibration	Period
Spectrum Analyzer	R&S	FSL6	100194	January 1, 2015	1 year
Vector Signal Generator	Agilent	N5182A	MY48180244	July 16, 2015	1 year
30 dB Attenuator	Weinschel Engineering	49-30-34	PD426	January 14, 2015	1 year

Figure 18 Test Equipment Used

5. Occupied Bandwidth (CELL)

5.1 Test Specification

FCC Part 2, Section 1049

5.2 Test Procedure

The E.U.T. was set to the applicable test frequency with modulation. The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator (at the output port test) and an appropriate coaxial cable. RBW was set to 1%-5% from OBW.

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limit, the mean powers radiated are each equal to 0.5% of the total mean power radiated by a given emission.

The function 99% power bandwidth was used for this evaluation

Occupied bandwidth measured was repeated in the input terminal of the E.U.T.

The E.U.T was evaluated at the low, mid and high channels of the 3 modulations: LTE 64QAM, GSM and WCDMA.

5.3 Test Results

Modulation	port	Operating Frequency (MHz)	Reading (MHz)
LTE 64QAM	Input	874.0	8.98
LTE 64QAM	Output	874.0	8.99
LTE 64QAM	Input	881.0	8.98
LTE 64QAM	Output	881.0	8.94
LTE 64QAM	Input	889.0	8.98
LTE 64QAM	Output	889.0	8.99
GSM	Input	870.2	0.24
GSM	Output	870.2	0.24
GSM	Input	881.0	0.24
GSM	Output	881.0	0.24
GSM	Input	892.8	0.24
GSM	Output	892.8	0.24
WCDMA	Input	871.5	4.17
WCDMA	Output	871.5	4.19
WCDMA	Input	881.0	4.17
WCDMA	Output	881.0	4.19
WCDMA	Input	891.5	4.17
WCDMA	Output	891.5	4.17

Figure 19 Occupied Bandwidth CELL

See additional information in *Figure 20 to Figure 37*.

JUDGEMENT: Passed

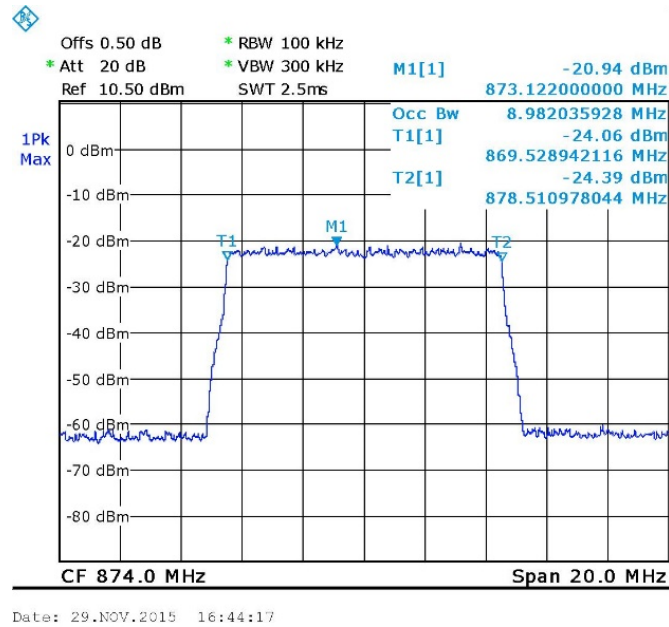


Figure 20. LTE 64QAM - 874.0MHz Input

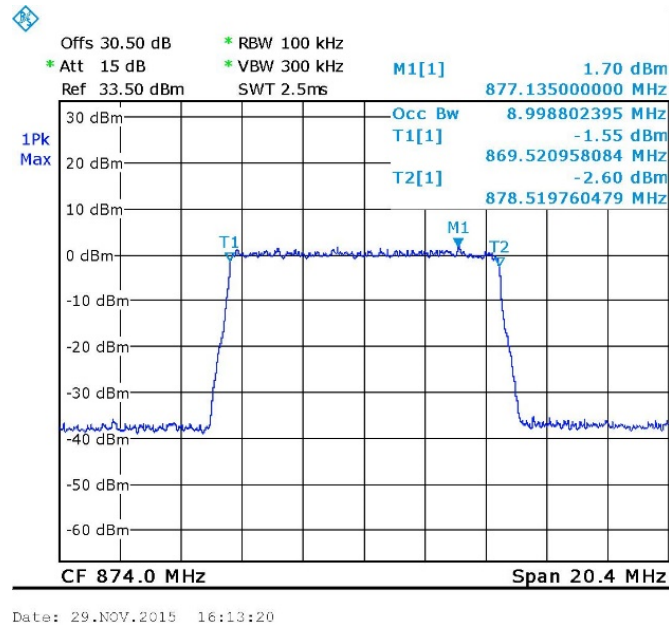


Figure 21. LTE 64QAM - 874.0MHz Output

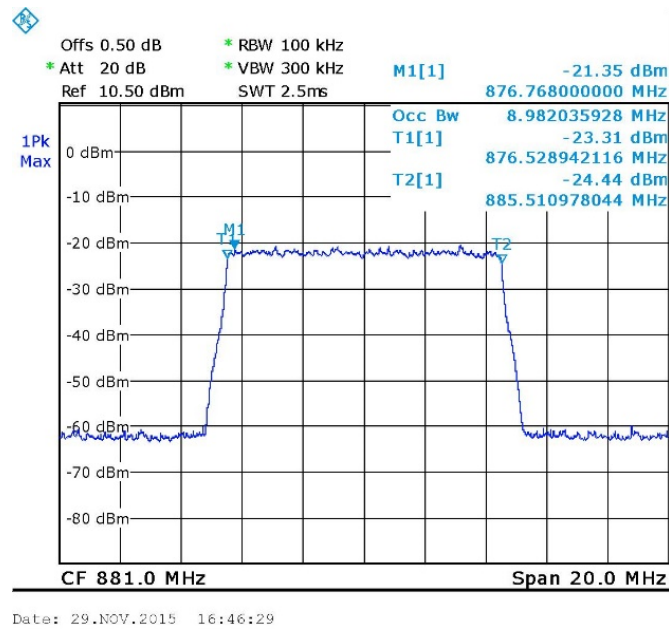


Figure 22. LTE 64QAM - 881.0 MHz Input

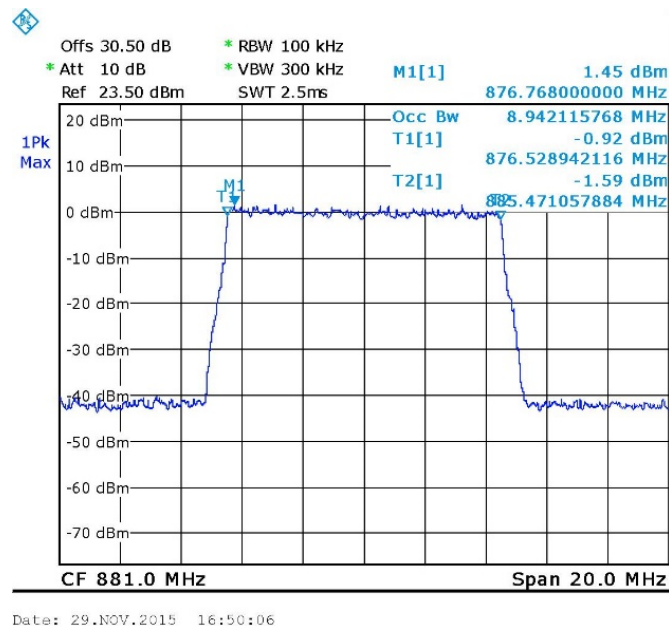


Figure 23. LTE 64QAM - 881.0MHz Output

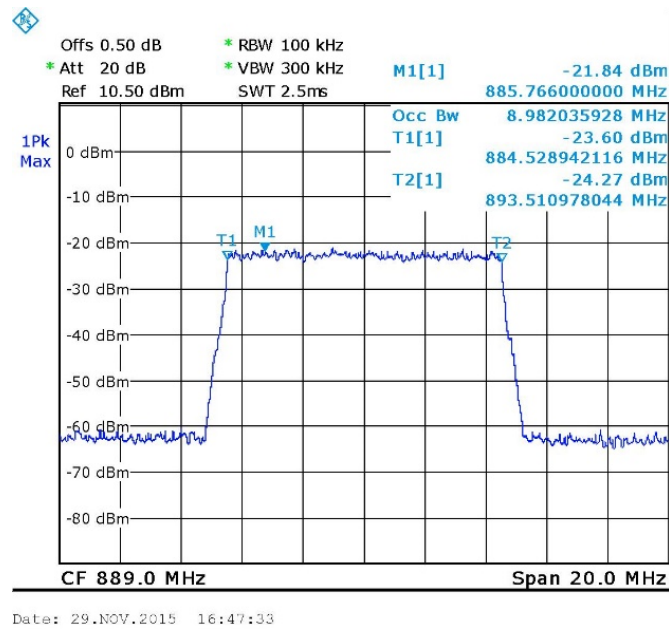


Figure 24. LTE 64QAM - 889.0 MHz Input

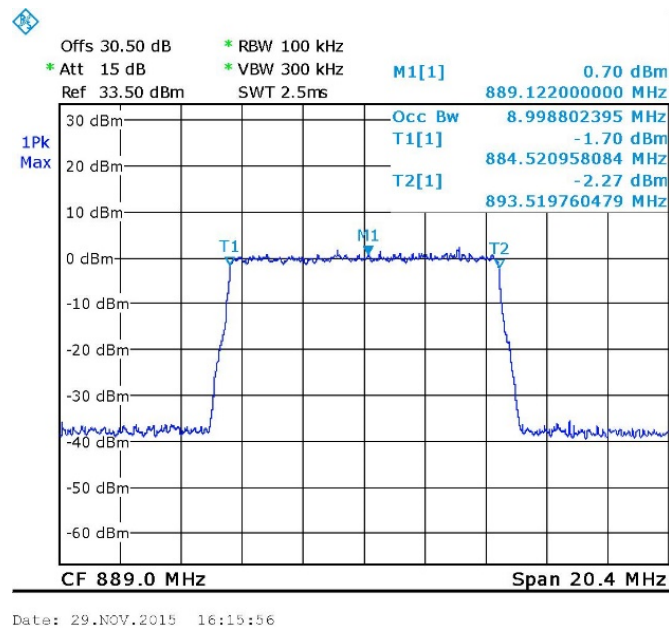


Figure 25. LTE 64QAM - 889.0 MHz Output

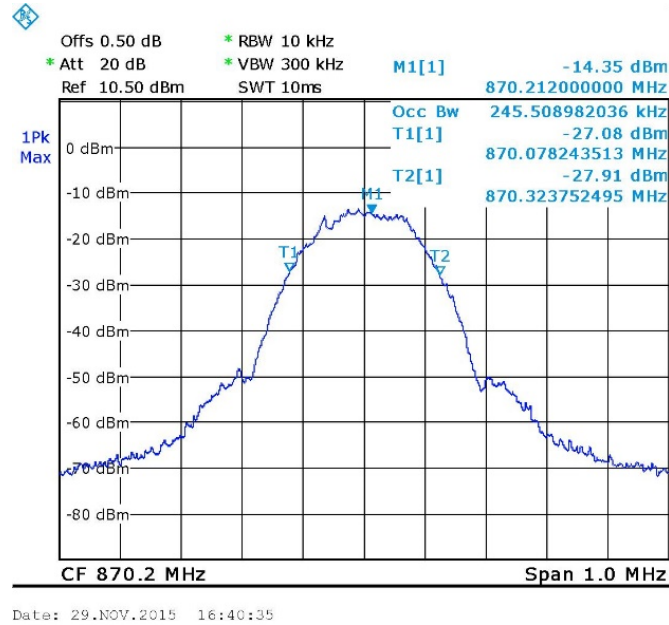


Figure 26. GSM - 870.2MHz Input

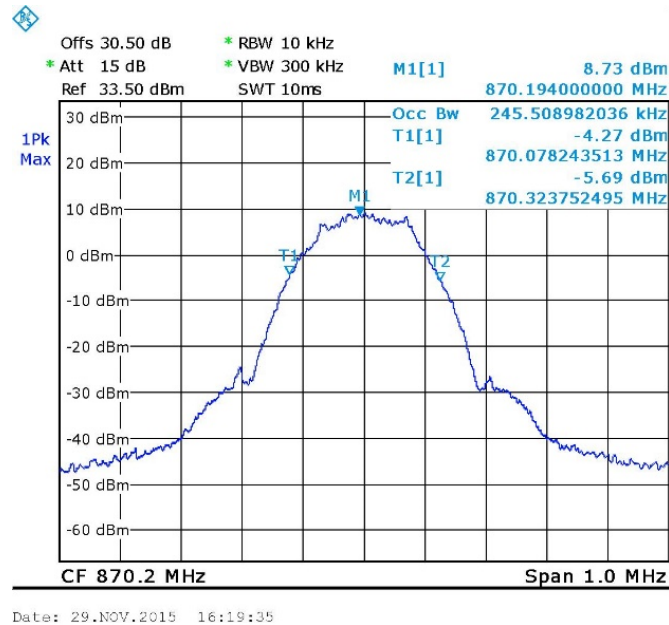


Figure 27. GSM - 870.2MHz Output

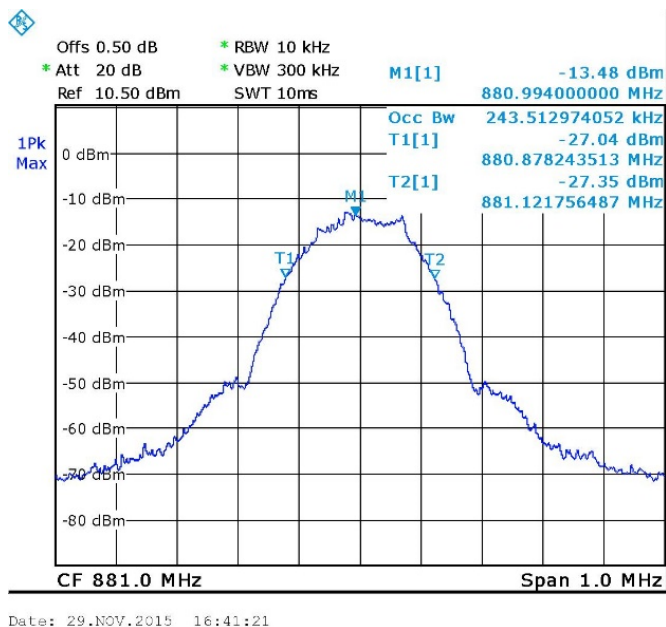


Figure 28. GSM - 881.0 MHz Input

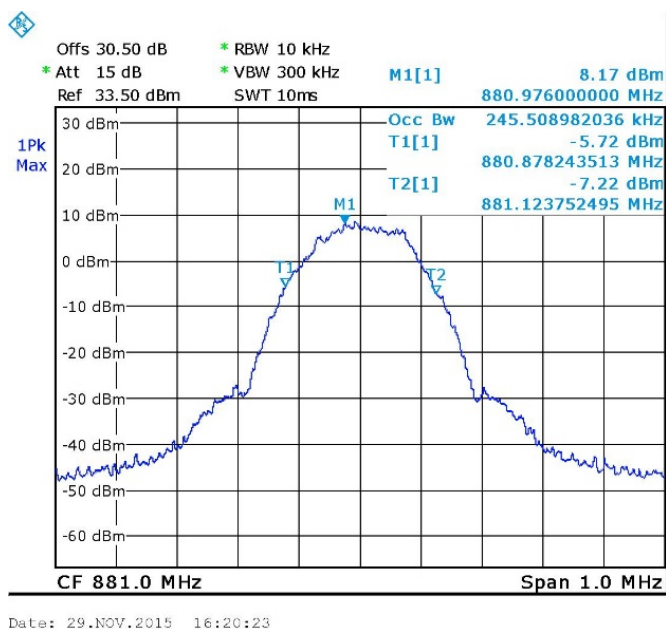


Figure 29. GSM - 881.0MHz Output

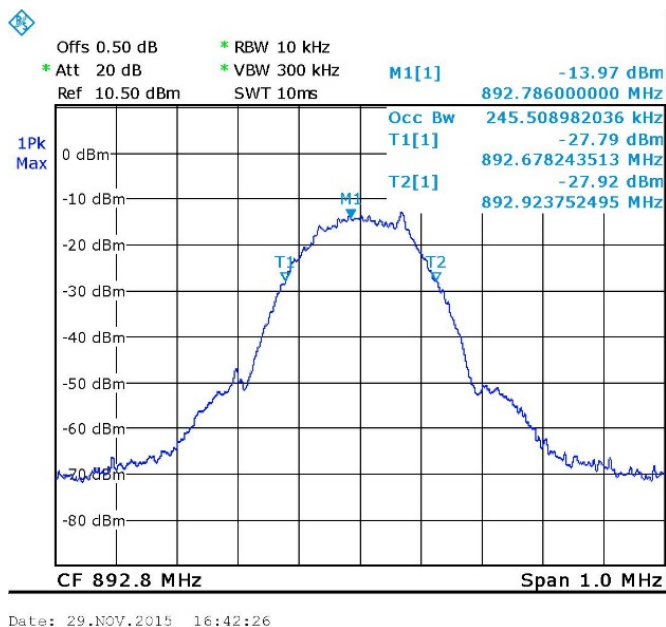


Figure 30. GSM - 892.8 MHz Input

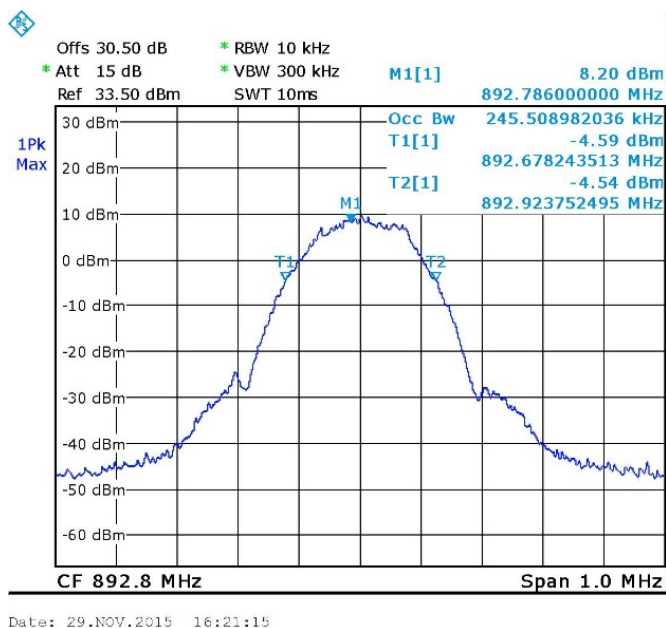


Figure 31. GSM -892.8 MHz Output

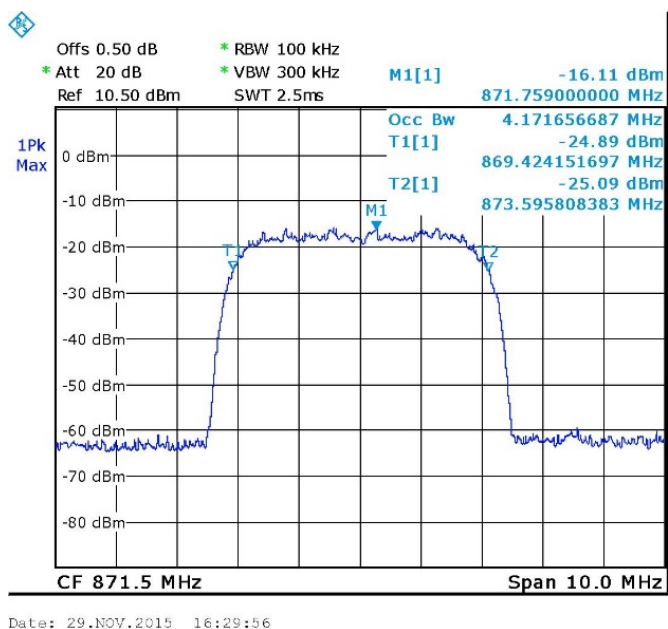


Figure 32.WCDMA - 871.5MHz Input

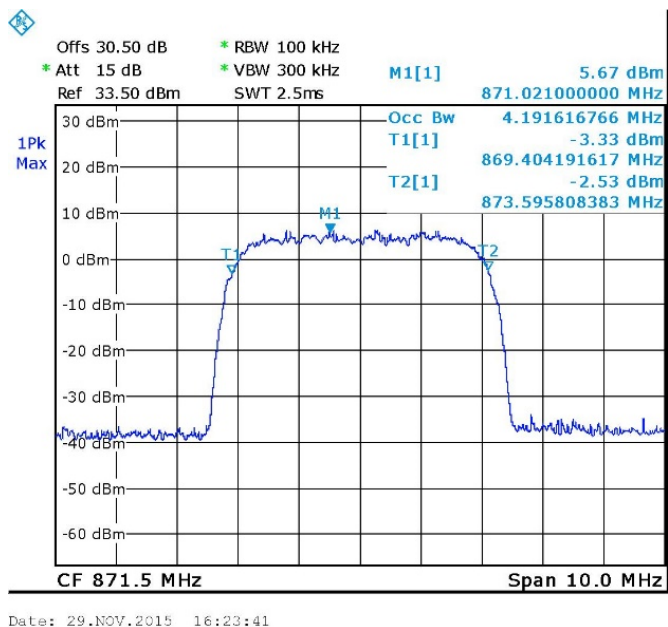


Figure 33. WCDMA - 871.5MHz Output

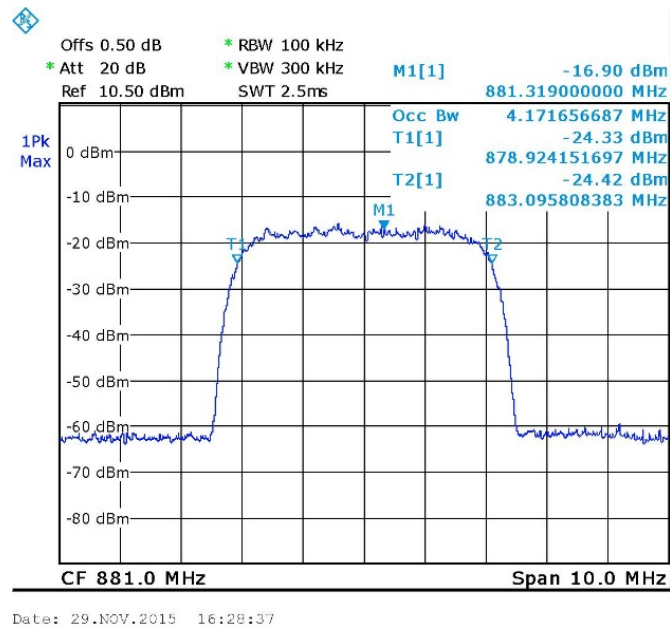


Figure 34. WCDMA - 881.0 MHz Input

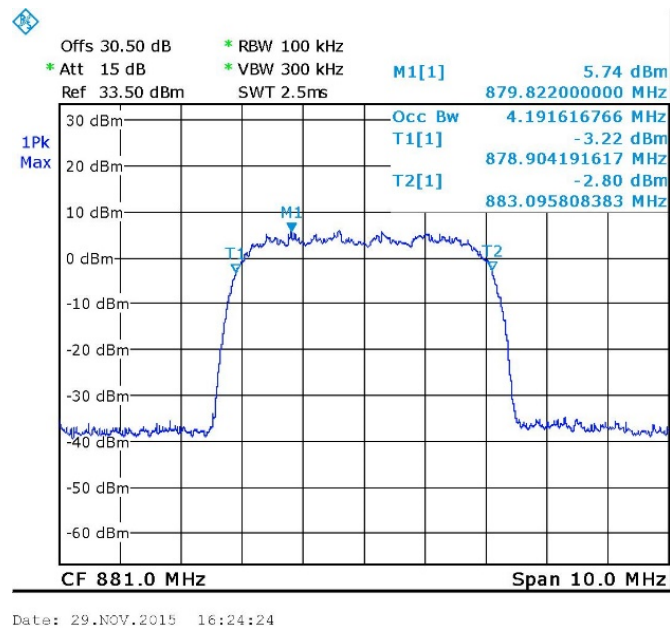


Figure 35. WCDMA - 881.0MHz Output

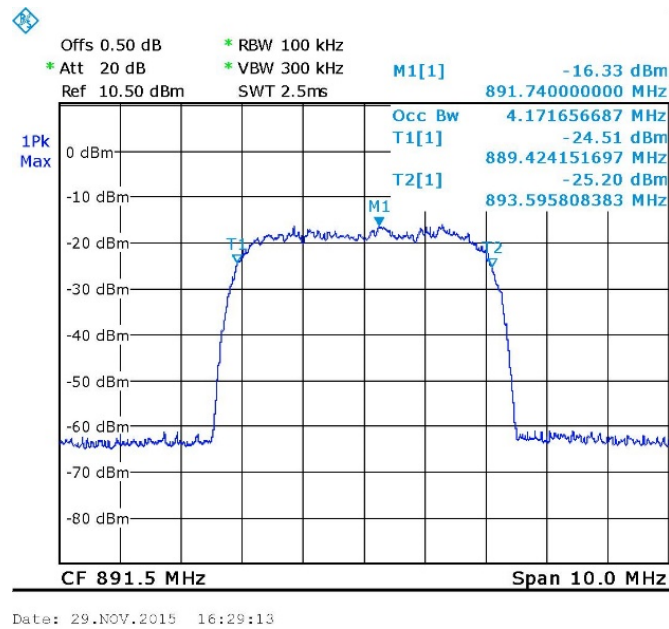


Figure 36. WCDMA - 891.5 MHz Input

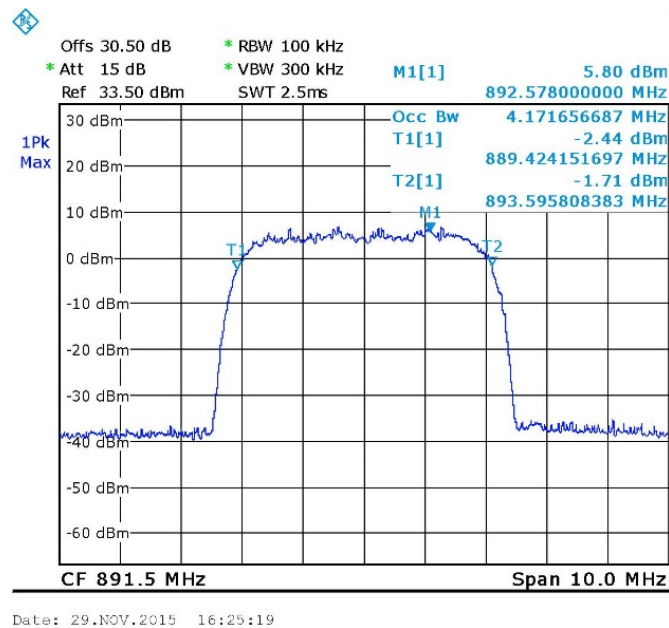


Figure 37. WCDMA - 891.5 MHz Output



5.4 Test Equipment Used; Occupied Bandwidth CELL

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibration	Period
Spectrum Analyzer	R&S	FSL6	100194	January 1, 2015	1 year
Vector Signal Generator	Agilent	N5182A	MY48180244	July 16, 2015	1 year
30 dB Attenuator	Weinschel Engineering	49-30-34	PD426	January 14, 2015	1 year

Figure 38 Test Equipment Used

6. Out of Band Emissions at Antenna Terminals (CELL)

6.1 Test Specification

FCC Part 22, Section 917(a); FCC Part 2.1051

6.2 Test Procedure

The power of any emission outside of the authorized bandwidth must be attenuated below the transmitting power (P) by a factor of at least

$43 + \log (P)$ dB, yielding -13dBm .

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator and an appropriate coaxial cable (max total Loss= 33.0 dB).

The resolution bandwidth was set to 1.0 kHz for the frequency range 9 kHz – 1 MHz, 100 kHz for the frequency range 1 MHz to 1 GHz, and 1 MHz in the frequency range 1 – 22 GHz.

The E.U.T was evaluated at the low, mid and high channels of each of the 3 modulations: LTE 64QAM, GSM, WCDMA.

6.3 Test Results

See additional information in *Figure 39* to *Figure 47*.

JUDGEMENT: Passed

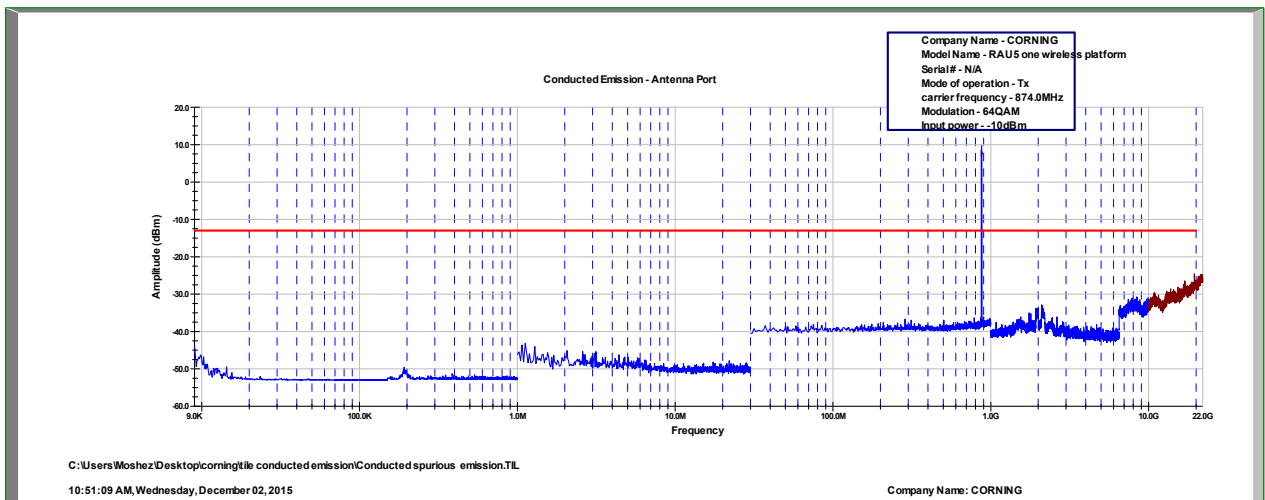


Figure 39 LTE 64QAM — 874.0 MHz

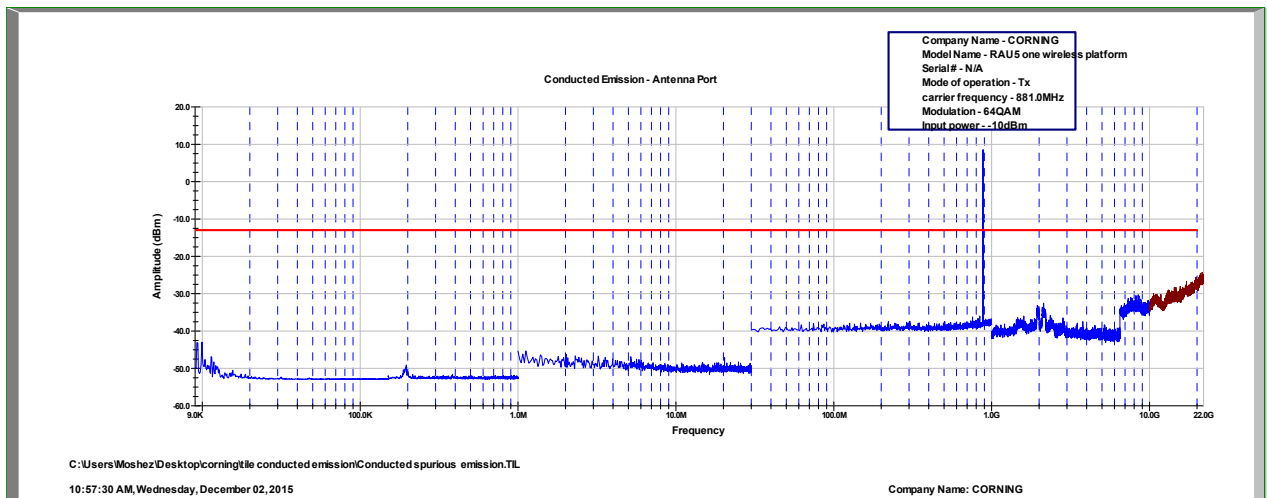


Figure 40 LTE 64QAM — 881.0 MHz

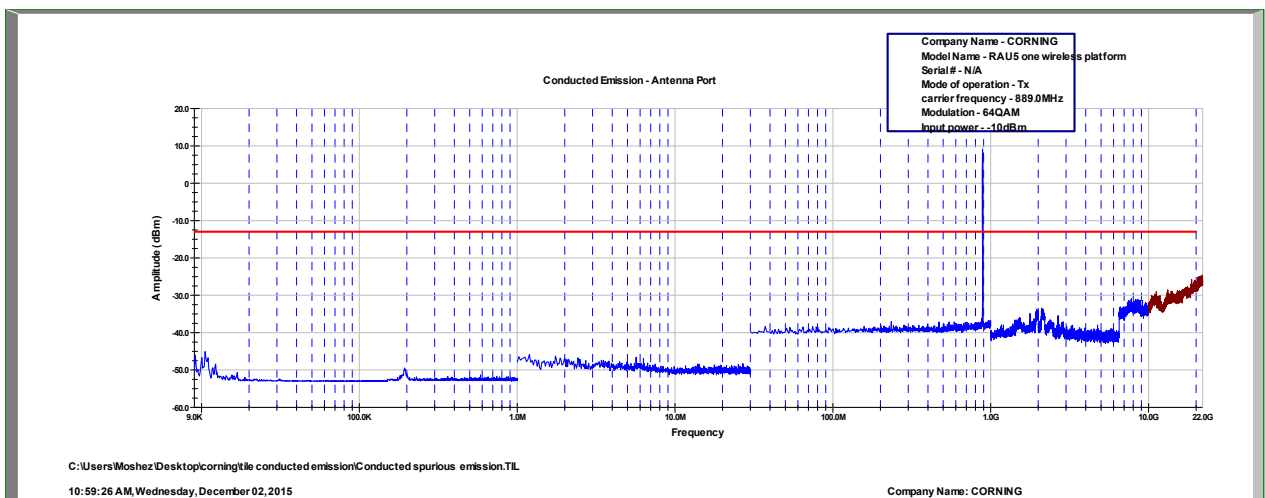


Figure 41 LTE 64QAM — 889.0 MHz

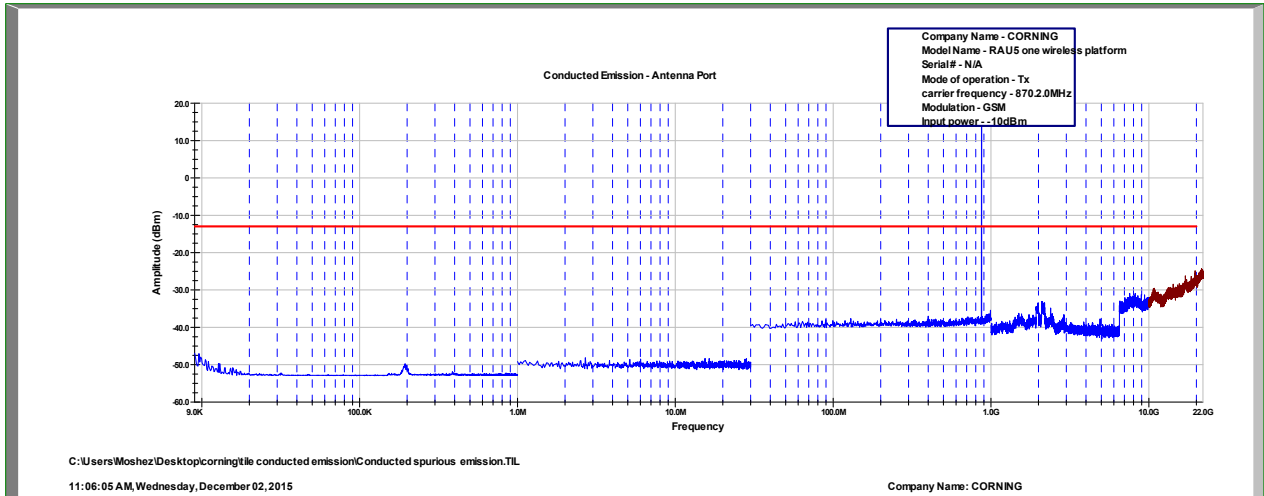


Figure 42. GSM — 870.2 MHz

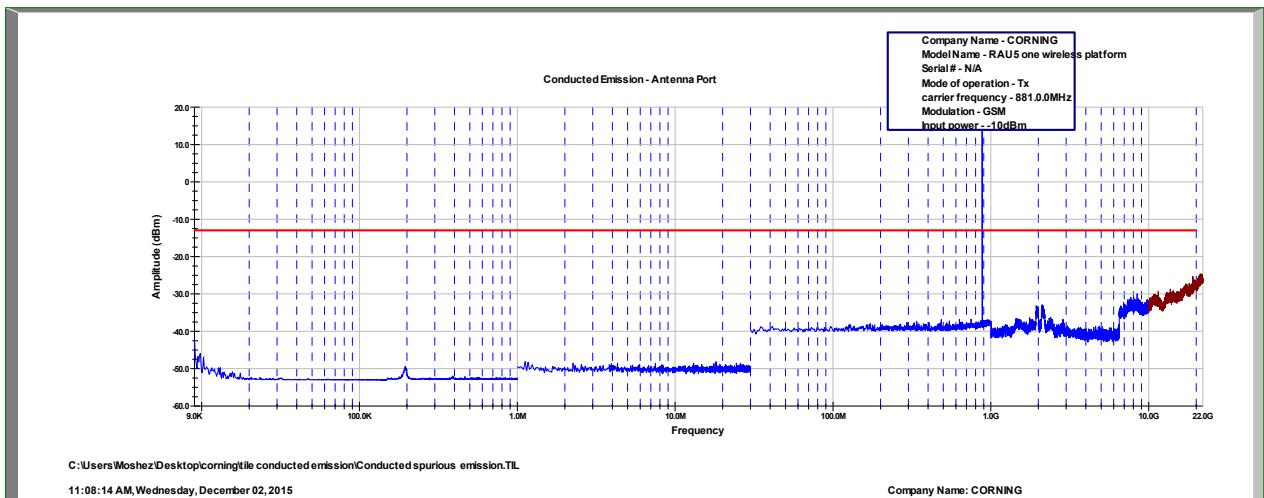


Figure 43. GSM — 881.0 MHz

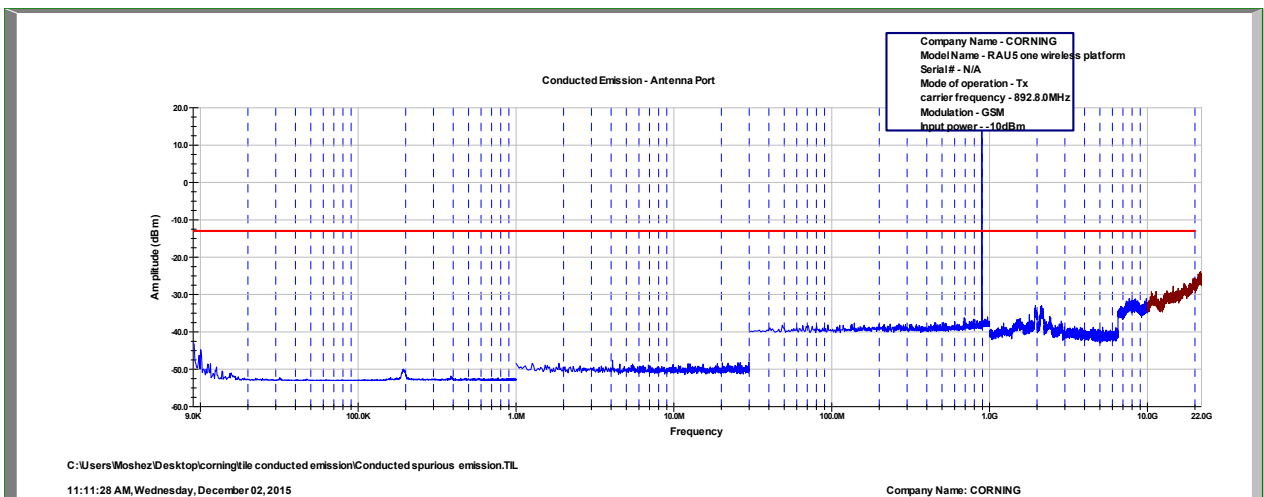


Figure 44. GSM — 892.8 MHz

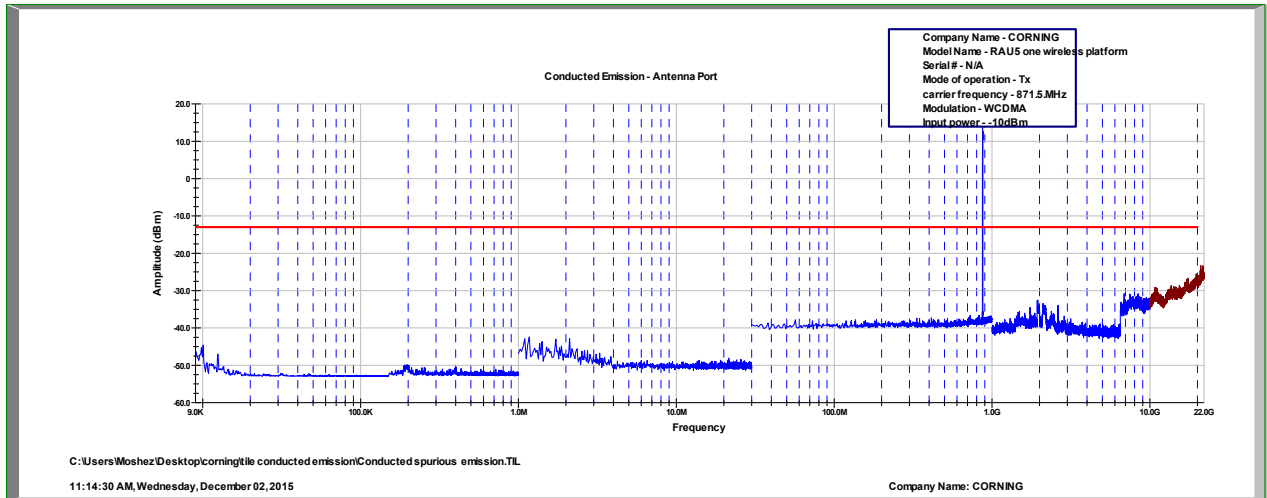


Figure 45. WCDMA — 871.5 MHz

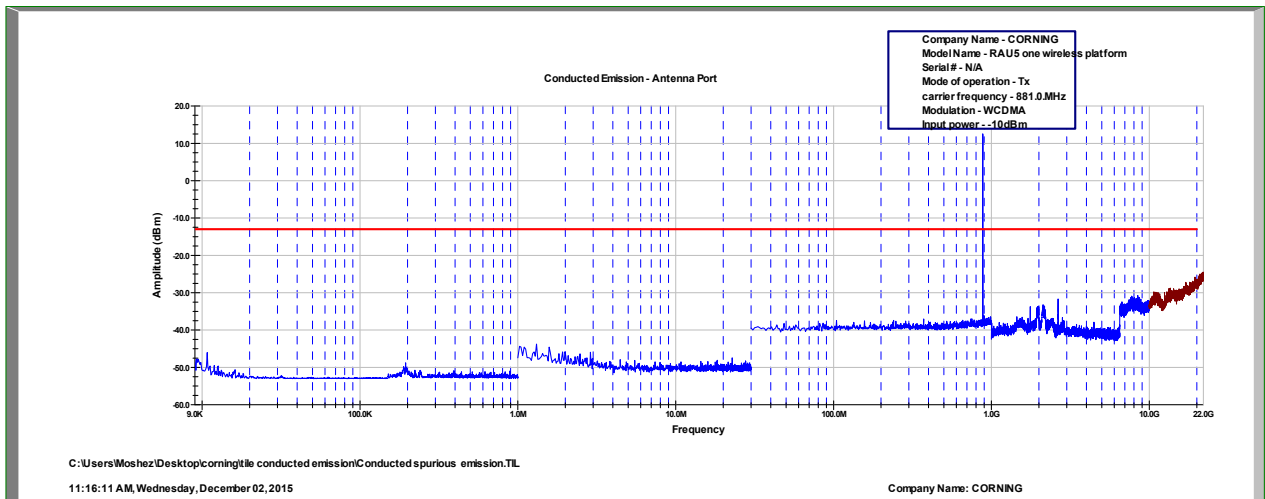


Figure 46. WCDMA — 881.0 MHz

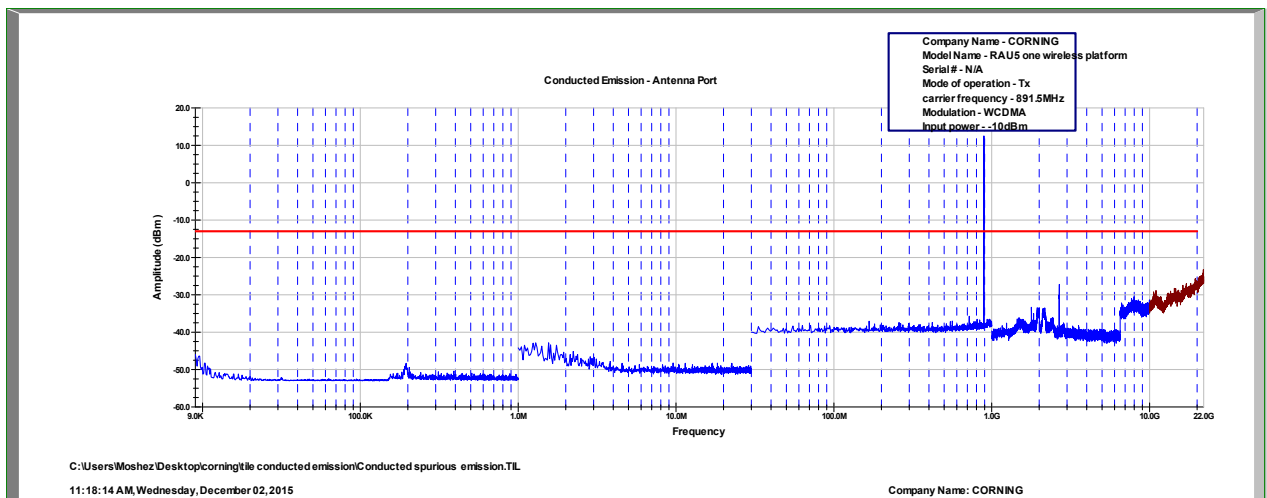


Figure 47. WCDMA — 891.5 MHz



6.4 Test Equipment Used; Out of Band Emission at Antenna Terminals CELL

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibration	Period
Spectrum Analyzer	HP	8592L	3826A01204	March 4, 2015	1 year
Vector Signal Generator	Agilent	N5182A	MY48180244	July 16, 2015	1 year
30 dB Attenuator	Weinschel Engineering	49-30-34	PD426	January 14, 2015	1 year

Figure 48 Test Equipment Used