



**DATE: 5 December 2016**

**I.T.L. (PRODUCT TESTING) LTD.**  
**FCC Radio Test Report**  
**For**

**Corning Optical Communication Wireless**

**Equipment under test:**

**ONE - Optical Network Evolution DAS**

**RAU-5X Remote Antenna Unit**

**AWS-3, CELL/ESMR, LTE, PCS  
(LTE Section)**

Tested by:

M. Zohar

Approved by:

D. Shidlowsky

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.



**Measurement/Technical Report for  
Corning Optical Communication Wireless  
ONE - Optical Network Evolution DAS  
RAU-5X  
(LTE Section)**

**FCC ID: OJF1RAU5X**

This report concerns:      Original Grant:  
                                    Class II change: X  
                                    Class I change:  
  
Equipment type:      Part 20 Industrial Booster (CMRS)  
  
Limits used:      47CFR Parts 2; 27  
  
Measurement procedure used is KDB 971168 D03 v01 and KDB 935210 D05 v01r01  
  
Substitution Method used as in ANSI/TIA-603-D: 2010  
  
Application for Certification      Applicant for this device:  
prepared by:                      (different from "prepared by")  
R. Pinchuck                      Habib Riazi  
ITL (Product Testing) Ltd.      Corning Optical Communication Wireless  
1 Bat Sheva St.                   13221 Woodland Park Rd., Suite #400  
Lod 7120101                      Herndon, VA. 20171  
Israel                              U.S.A.  
e-mail: rpinchuck@itl.co.il      Tel: +1-541-758-2880  
                                    Fax: +1-703-848-0260  
                                    e-mail: RiaziH@corning.com

# TABLE OF CONTENTS

|  |           |
|--|-----------|
| <b>1. GENERAL INFORMATION -----</b>  | <b>5</b>  |
| 1.1 Administrative Information.....  | 5         |
| 1.2 List of Accreditations .....   | 6         |
| 1.3 Product Description .....  | 7         |
| 1.4 Test Methodology .....   | 7         |
| 1.5 Test Facility .....  | 7         |
| 1.6 Measurement Uncertainty .....  | 7         |
| <b>2. SYSTEM TEST CONFIGURATION-----</b>                                   | <b>8</b>  |
| 2.1 Justification.....   | 8         |
| 2.2 EUT Exercise Software .....  | 8         |
| 2.3 Special Accessories .....  | 8         |
| 2.4 Equipment Modifications .....  | 8         |
| 2.5 Configuration of Tested System .....                                   | 9         |
| <b>3. TEST SET-UP PHOTOS-----</b>  | <b>11</b> |
| <b>4. RF POWER OUTPUT LTE-----</b>   | <b>15</b> |
| 4.1 Test Specification .....   | 15        |
| 4.2 Test Procedure .....   | 15        |
| 4.3 Test Limit.....  | 15        |
| 4.4 Test Results.....  | 15        |
| 4.5 Test Equipment Used; RF Power Output LTE .....                         | 21        |
| <b>5. OCCUPIED BANDWIDTH LTE-----</b>                                      | <b>22</b> |
| 5.1 Test Specification .....   | 22        |
| 5.2 Test Procedure .....   | 22        |
| 5.3 Test Limit.....  | 22        |
| 5.4 Test Results.....  | 22        |
| 5.5 Test Equipment Used; Occupied Bandwidth LTE .....                      | 32        |
| <b>6. SPURIOUS EMISSIONS AT ANTENNA TERMINALS LTE-----</b>                 | <b>33</b> |
| 6.1 Test Specification .....   | 33        |
| 6.2 Test Procedure .....   | 33        |
| 6.3 Test Limit.....  | 33        |
| 6.4 Test Results.....  | 33        |
| 6.5 Test Equipment Used; Spurious Emissions at Antenna Terminals LTE ..... | 37        |
| <b>7. BAND EDGE SPECTRUM LTE-----</b>                                      | <b>38</b> |
| 7.1 Test Specification .....   | 38        |
| 7.2 Test procedure .....   | 38        |
| 7.3 Test Limit.....  | 38        |
| 7.4 Test Results.....  | 38        |
| 7.5 Test Equipment Used; Band Edge Spectrum LTE.....                       | 42        |
| <b>8. SPURIOUS RADIATED EMISSION LTE-----</b>                              | <b>43</b> |
| 8.1 Test Specification .....   | 43        |
| 8.2 Test Procedure .....   | 43        |
| 8.3 Test Limit.....  | 44        |
| 8.4 Test Results.....  | 44        |
| 8.5 Test Instrumentation Used; Radiated Measurements.....                  | 45        |
| <b>9. INTERMODULATION CONDUCTED -----</b>                                  | <b>46</b> |
| 9.1 Test Procedure .....   | 46        |
| 9.2 Test Limit.....  | 46        |
| 9.3 Test Results.....  | 46        |
| 9.4 Test Equipment Used; Intermodulation Conducted .....                   | 47        |
| <b>10. INTERMODULATION RADIATED -----</b>                                  | <b>48</b> |
| 10.1 Test Procedure .....  | 48        |
| 10.2 Test Limit.....   | 49        |
| 10.3 Test Results.....   | 49        |
| 10.4 Test Instrumentation Used; Radiated Measurements Intermodulation..... | 50        |



|  |           |
|--|-----------|
| <b>11. OUT-OF-BAND REJECTION (LTE)</b>                 | <b>51</b> |
| 11.1 Test Specification .....                          | 51        |
| 11.2 Test Procedure .....                              | 51        |
| 11.3 Test Limit.....                                   | 51        |
| 11.4 Test Results.....                                 | 51        |
| 11.5 Test Equipment Used; Out-of-Band Rejection .....  | 52        |
| <b>12. APPENDIX A - CORRECTION FACTORS</b>             | <b>53</b> |
| 12.1 Correction factors for RF OATS Cable 35m.....     | 53        |
| 12.2 Correction factors for RF OATS Cable 10m.....     | 54        |
| 12.3 Correction factors for Horn Antenna .....         | 55        |
| 12.4 Correction factors for Horn ANTENNA.....          | 56        |
| 12.5 Correction factors for Log Periodic Antenna ..... | 57        |
| 12.6 Correction factors for Biconical Antenna.....     | 58        |
| 12.7 Correction factors for ACTIVE LOOP ANTENNA .....  | 59        |



## 1. General Information

### 1.1 Administrative Information

Manufacturer: Corning Optical Communication Wireless  
Manufacturer's Address: 13221 Woodland Park Rd., Suite #400  
Herndon, VA. 20171  
U.S.A.  
Tel: +1-541-758-2880  
Fax: +1-703-848-0260  
Manufacturer's Representative: Habib Riazi

Equipment Under Test (E.U.T): ONE - Optical Network Evolution DAS  
Equipment Model No.: RAU-5X  
Equipment Serial No.: 0516110015  
Date of Receipt of E.U.T: July 3, 2016  
Start of Test: July 10, 2016  
End of Test: September 15, 2016  
Test Laboratory Location: I.T.L (Product Testing) Ltd.  
1 Batsheva St,  
Lod,  
Israel 7120101  
Test Specifications: FCC Parts 2; 27



## 1.2 *List of Accreditations*

The EMC laboratory of I.T.L. is accredited by/registered with the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), FCC Designation Number is IL1005.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-3006, R-2729, T-1877, G-245.
5. Industry Canada (Canada), IC File No.: 46405-4025; Site No. IC 4025A-1, IC 4025A-2.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.



### 1.3 **Product Description**

The Optical Network Platform (ONE™) by Corning provides a flexible in-building RF and network digital coverage solution based on a fiber optic transport backbone.

The fiber-optics infrastructure is easily deployable via a wide range of pre-terminated composite cables and advanced end-to-end equipment. Easy to design, Plug and Play™ connectors, significantly reduce installation cost and deployment time.

The ONE™ solution is an ideal fit for large, high-rise or campus-style deployments. It generates significant CAPEX savings and OPEX savings through the use of user configurable sectorization and an infrastructure that is simple to deploy and efficient in usage.

Dynamic sectorization management allows precise service distribution control to meet changing density needs, and provides further savings by enabling sharing of equipment at various levels for service providers.

Radio source agnostic, remote units can be used as network extenders. Ethernet capability with dedicated fiber link for Wi-Fi offload brings a higher level of granularity and support for devices and applications with very high speed requirements.

### 1.4 **Test Methodology**

Radiated testing was performed according to the procedures in KDB 971168 D03 v01 and KDB 935210 D05 v01r01

Radiated testing was performed at an antenna to EUT distance of 3 meters.

### 1.5 **Test Facility**

Both conducted and radiated emissions tests were performed at I.T.L.'s testing facility in Lod, Israel. I.T.L.'s EMC Laboratory is accredited by A2LA, certificate No. 1152.01 and its FCC Designation Number is IL1005.

### 1.6 **Measurement Uncertainty**

Conducted Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4)

0.15 – 30 MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 3.44 dB

Radiated Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4) for open site 30-1000MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 4.98 dB



## 2. System Test Configuration

### 2.1 *Justification*

The E.U.T. was originally FCC certified on 02/18/2016 under FCC ID: OJF1RAU5X.

The E.U.T. transmitter is certified to operate as a 5 band remote unit as part of a booster system that can operate with FCC ID: OJF1RXU.

No changes have been made to the E.U.T.

The C2PC change is to allow the E.U.T. to operate as a 5 band remote unit as part of a booster system that can operate with the new RXU2325 certified under FCC ID: OJF1RXUN.

The E.U.T. has been fully tested with the RXU2325 and results presented in the four reports (for bands AWS-3, CELL/ESMR, PCS & LTE) submitted with this application.

The test setup was configured to closely resemble the standard installation.

The EUT consists of the HEU, the OIU and the RAU5x.

All source signals are represented in the setup by appropriate signal generators.

An "Exercise" SW on the computer was used to enable / disable transmission of the RAU5x, while the EUT output was connected to the spectrum analyzer.

All channels transmitted during the testing.

There is neither an intermediate amplified nor donor antenna in the uplink.

All components included in the UL path are connected by cables.

### 2.2 *EUT Exercise Software*

HCM\_2.2 Build23

ACM\_2a00\_22\_11.bin

RMM\_5a00\_22\_02. bin

OIM\_7a03\_22\_05. bin

RAU5\_9a64\_22\_12.bin

### 2.3 *Special Accessories*

No special accessories were needed in order to achieve compliance.

### 2.4 *Equipment Modifications*

No modifications were necessary in order to achieve compliance.

## 2.5 Configuration of Tested System

|                          |   |
|--------------------------|---|
| Product Name             | ONE Wireless Platform   |
| Model Name               | RAU-5X  |
| Working voltage          | 48.0VDC (via ac/dc adapter:<br>Manufacturer: FSP GROUP<br>P/N: 9NA1201601<br>S/N: H00003056 |
| Mode of operation        | Industrial Booster for LTE band   |
| Modulations              | QPSK, 16QAM, 64QAM  |
| Assigned Frequency Range | 728.0MHz-758.0MHz   |
| Transmit power           | ~20.0dBm  |
| Antenna Gain             | 12.5dBi   |
| DATA rate                | N/A   |
| Modulation BW            | 10.0MHz   |



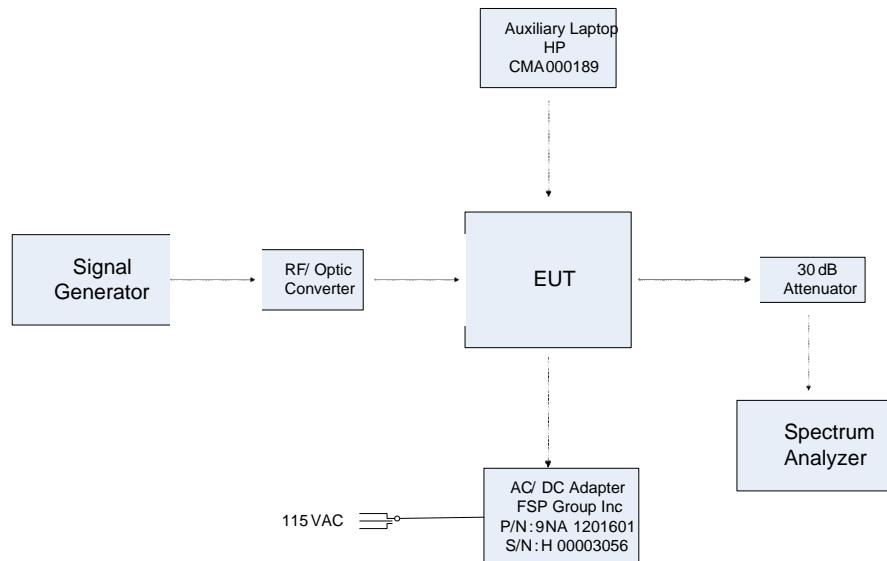


Figure 1. Conducted Test Set-Up

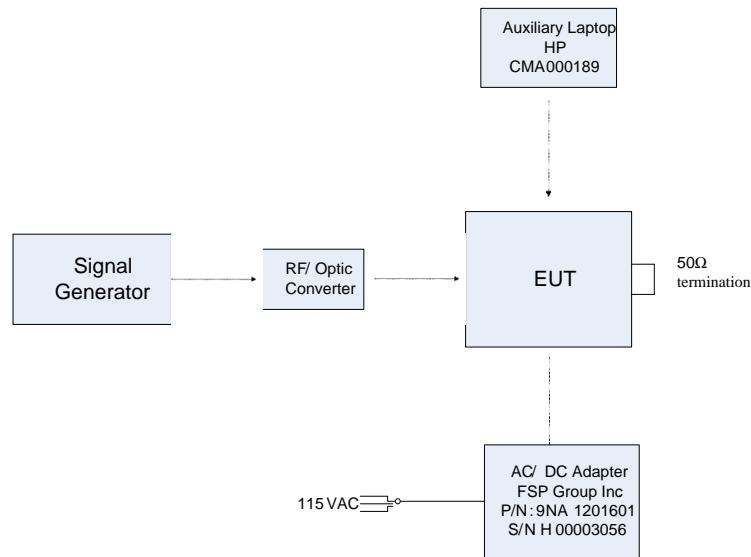

**Figure 2. Radiated Test Set-Up**

### 3. Test Set-Up Photos

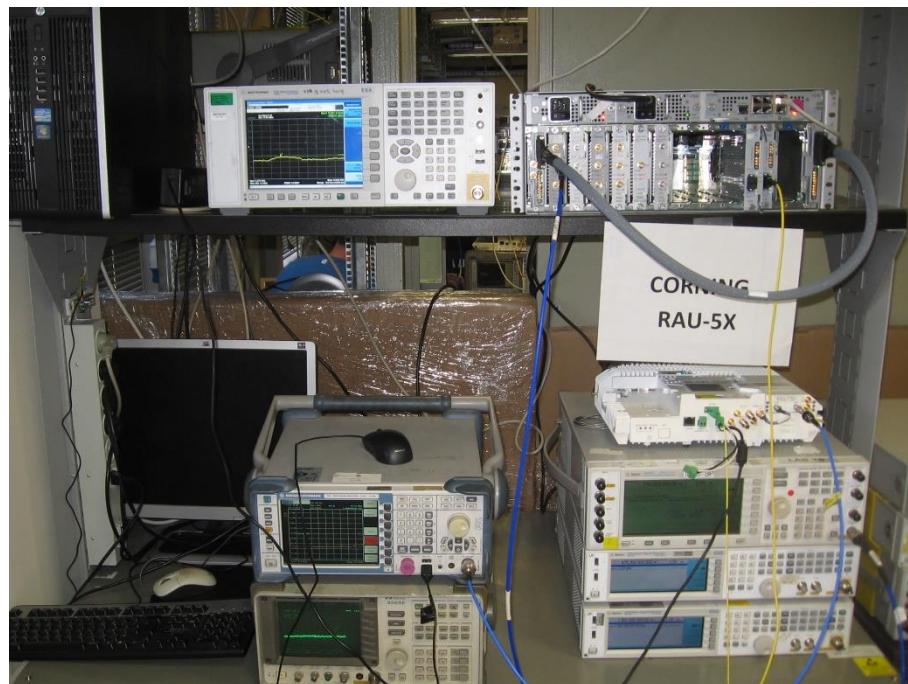


**Figure 3. Conducted Emission From Antenna Port Test**



**Figure 4. Radiated Emission Test**



**Figure 5. Radiated Emission Test**

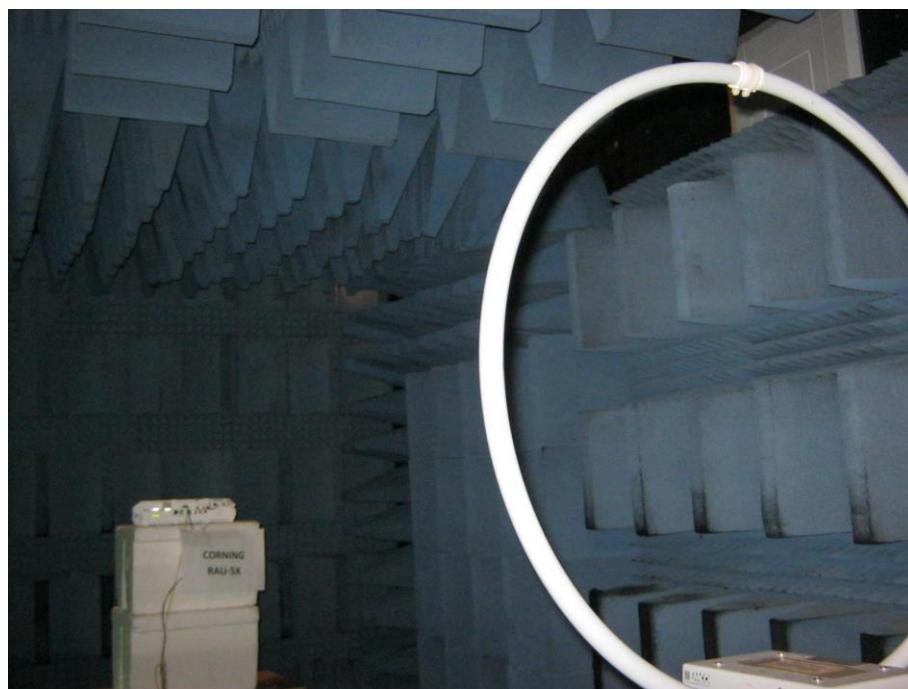


**Figure 6. Radiated Emission Test**



**Figure 7. Radiated Emission Test**



**Figure 8. Radiated Emission Test**

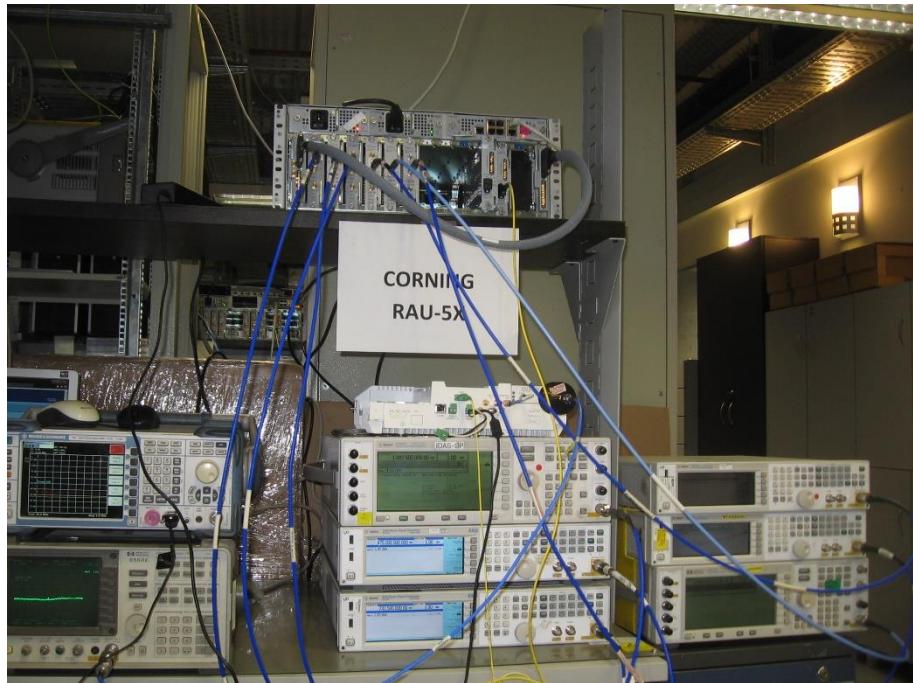

**Figure 9. Intermodulated Conducted Emission Test**



## 4. RF Power Output LTE

### 4.1 Test Specification

FCC Part 27, Subpart C (27.50)

### 4.2 Test Procedure

(Temperature (23°C)/ Humidity (36%RH))

The E.U.T. antenna terminal was connected to the Spectrum Analyzer through an external attenuator (31.0 dB) and an appropriate coaxial cable. Special attention was taken to prevent Spectrum Analyzer RF input overload. The Spectrum Analyzer was set to 100 kHz RBW.

### 4.3 Test Limit

Peak Power Output must not exceed 1000W (60 dBm).

### 4.4 Test Results

| Modulation | Operation Frequency<br>(MHz) | Reading<br>(dBm) | Antenna Gain<br>(dBi) | EIRP<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|------------|------------------------------|------------------|-----------------------|---------------|----------------|----------------|
| LTE 64QAM  | 733.0                        | 16.7             | 12.5                  | 29.2          | 60.0           | -30.8          |
| LTE 64QAM  | 747.0                        | 16.7             | 12.5                  | 29.2          | 60.0           | -30.8          |
| LTE 64QAM  | 753.0                        | 16.5             | 12.5                  | 29.0          | 60.0           | -31.0          |
| LTE 16QAM  | 733.0                        | 16.5             | 12.5                  | 29.0          | 60.0           | -31.0          |
| LTE 16QAM  | 747.0                        | 16.7             | 12.5                  | 29.2          | 60.0           | -30.8          |
| LTE 16QAM  | 753.0                        | 15.4             | 12.5                  | 27.9          | 60.0           | -32.1          |
| LTE QPSK   | 733.0                        | 16.5             | 12.5                  | 29.0          | 60.0           | -31.0          |
| LTE QPSK   | 747.0                        | 16.8             | 12.5                  | 29.3          | 60.0           | -30.7          |
| LTE QPSK   | 753.0                        | 16.4             | 12.5                  | 28.9          | 60.0           | -31.1          |

Figure 10 RF Power Output LTE

JUDGEMENT: Passed

See additional information in *Figure 11* to *Figure 19*.

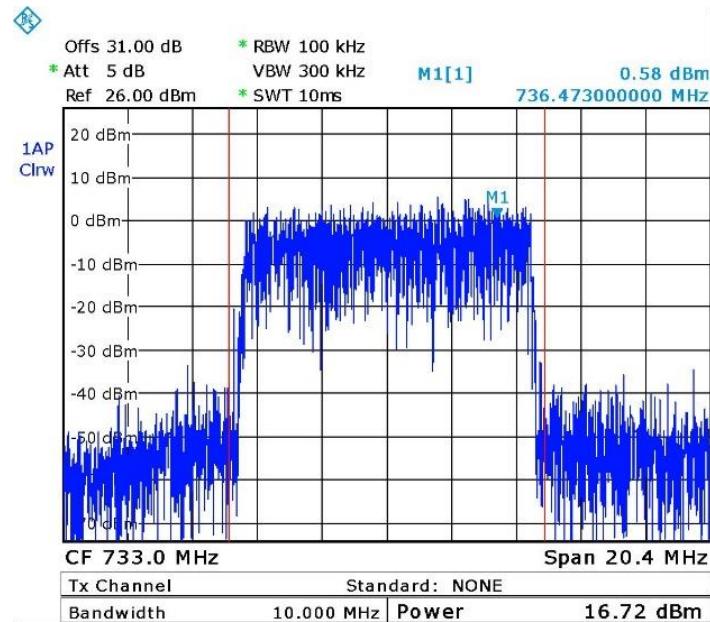


Figure 11. — 64QAM, 733 MHz



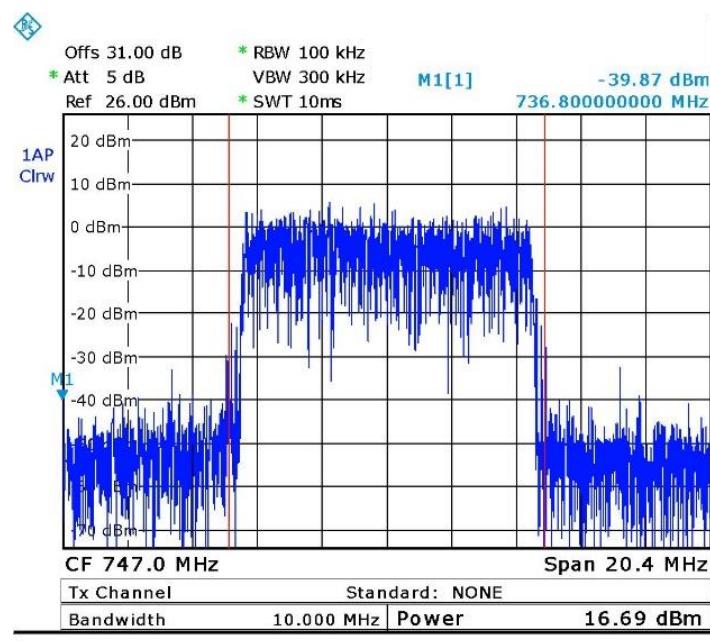


Figure 12. — 64QAM 747 MHz

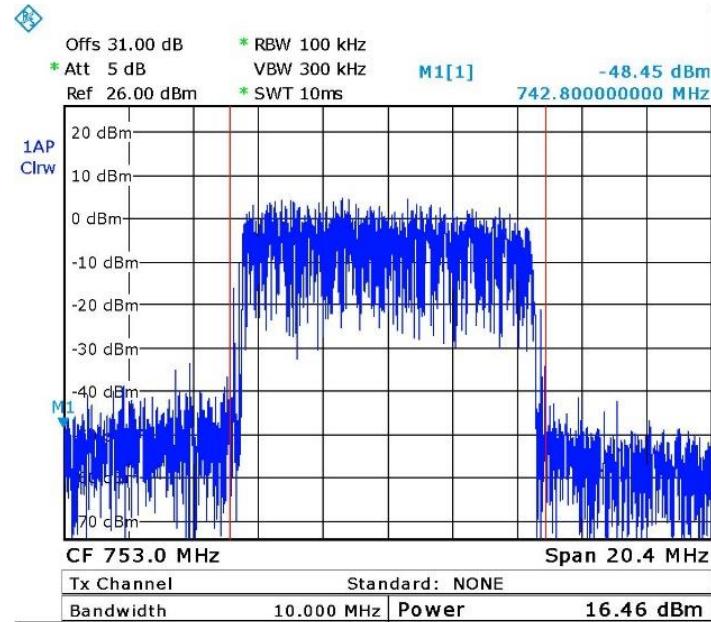


Date: 10.JUL.2016 14:38:59

Figure 13. — 64QAM 753 MHz

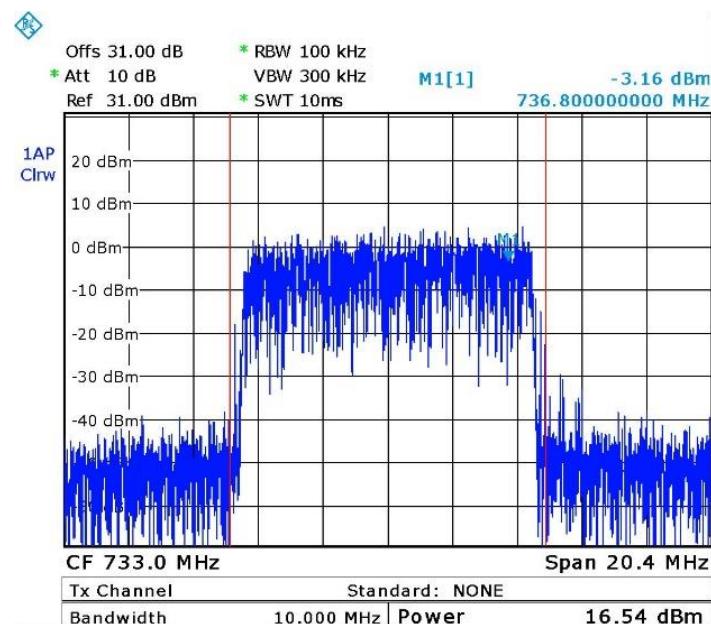


Date: 10.JUL.2016 15:23:07

Figure 14. — 16QAM 733 MHz

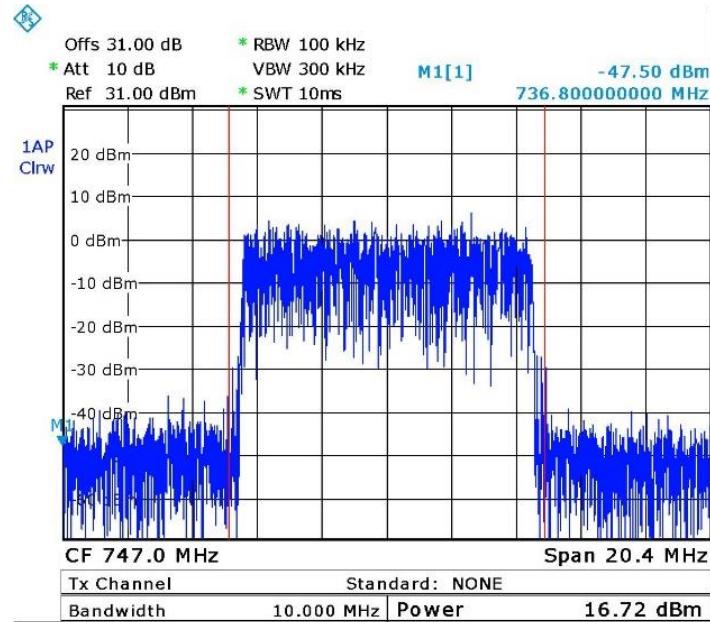


Date: 10.JUL.2016 15:23:47

Figure 15. — 16QAM 747 MHz

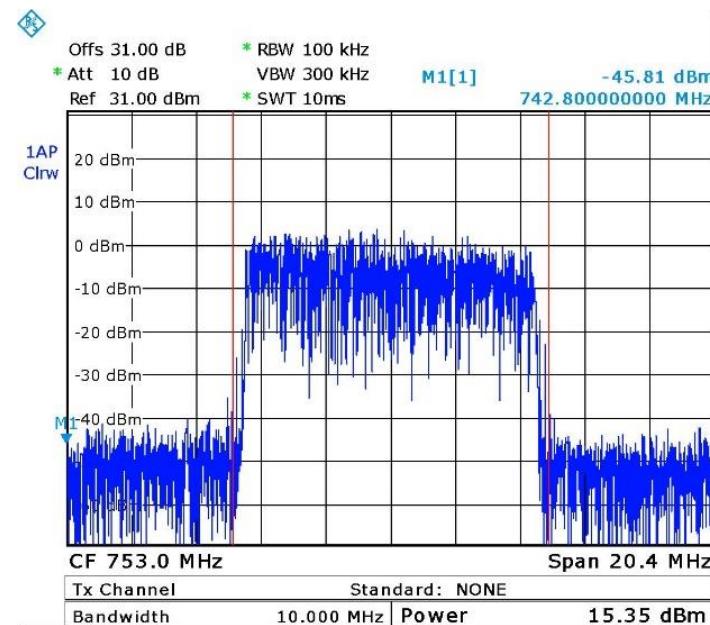


Date: 10.JUL.2016 15:24:16

Figure 16. — 16QAM 753 MHz

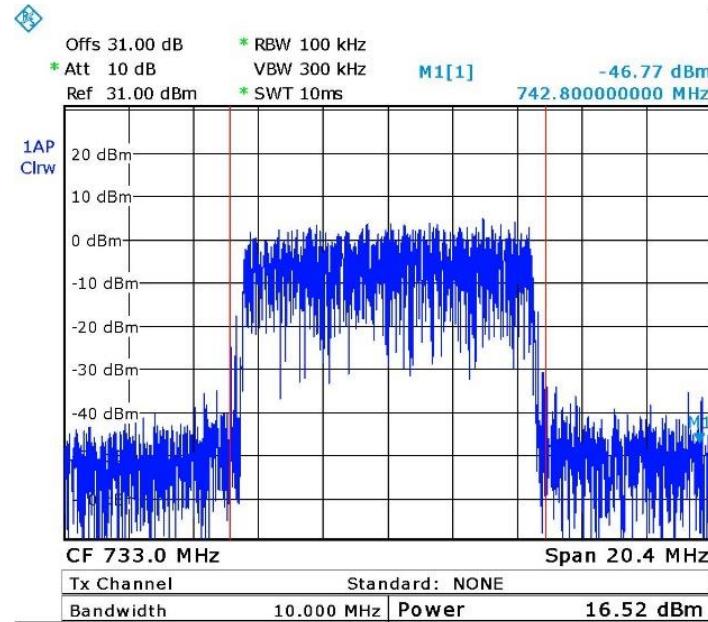


Date: 10.JUL.2016 15:26:13

Figure 17. — QPSK 733 MHz

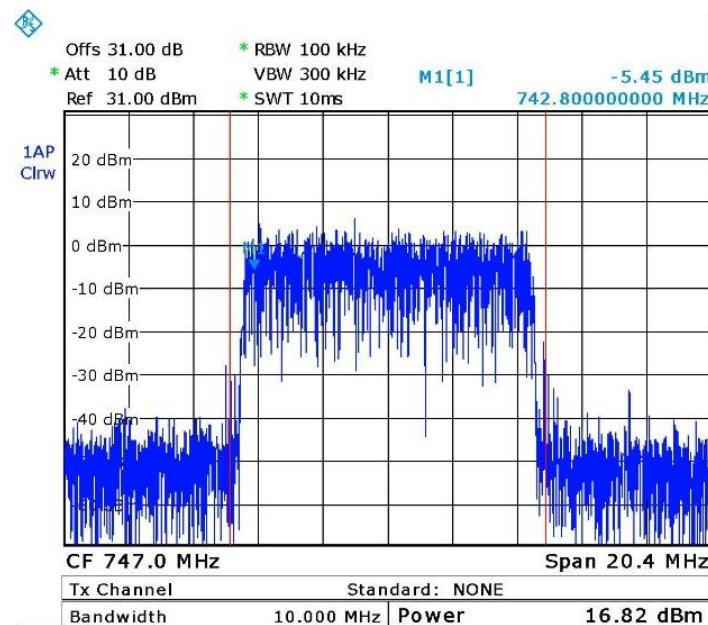

Date: 10.JUL.2016 15:25:43

Figure 18. — QPSK 747 MHz

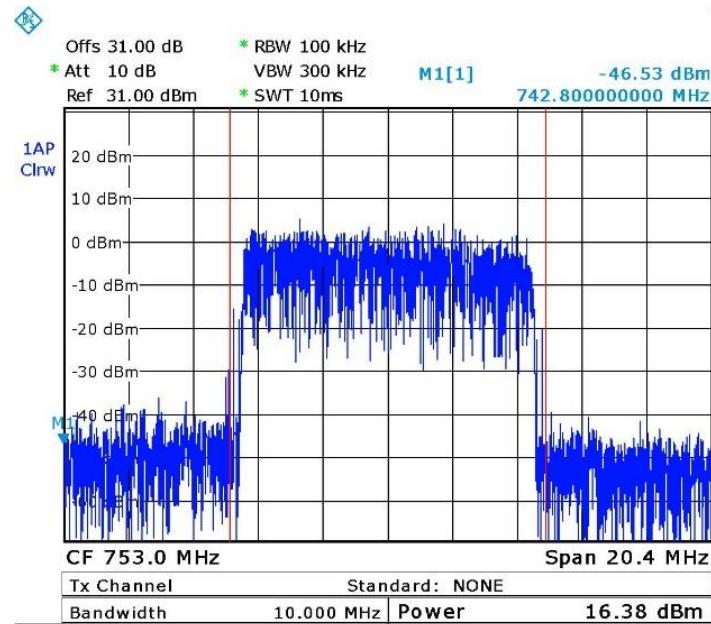

Date: 10.JUL.2016 15:25:06

Figure 19. — QPSK 753 MHz



#### 4.5 Test Equipment Used; RF Power Output LTE

| Instrument              | Manufacturer | Model    | Serial Number | Calibration           |                      |
|-------------------------|--------------|----------|---------------|-----------------------|----------------------|
|                         |              |          |               | Last Calibration Date | Next Calibration Due |
| Spectrum Analyzer       | R&S          | FSL6     | 100194        | February 29, 2016     | March 1, 2017        |
| Vector Signal Generator | Agilent      | N5172B   | MY51350584    | July 1, 2016          | July 1, 2017         |
| 30 dB Attenuator        | MCL          | BW-S30W5 | 533           | July 5, 2016          | July 5, 2017         |

**Figure 20 Test Equipment Used**

## 5. Occupied Bandwidth LTE

### 5.1 Test Specification

FCC Part 2, Section 1049

### 5.2 Test Procedure

(Temperature (22°C)/ Humidity (35%RH))

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator and an appropriate coaxial cable (loss=31.0 dB). The spectrum analyzer was set to proper resolution B.W.

OBW function (99%) was employed for this evaluation.

Occupied bandwidth measured was repeated in the input terminal of the E.U.T.

### 5.3 Test Limit

N/A


### 5.4 Test Results

| Modulation | Port            | Operating Frequency | Reading |
|------------|-----------------|---------------------|---------|
|            | (Input/ Output) | (MHz)               | (MHz)   |
| LTE 64QAM  | Input           | 733.0               | 9.0     |
| LTE 64QAM  | Output          | 733.0               | 9.0     |
| LTE 64QAM  | Input           | 747.0               | 9.0     |
| LTE 64QAM  | Output          | 747.0               | 8.9     |
| LTE 64QAM  | Input           | 753.0               | 8.9     |
| LTE 64QAM  | Output          | 753.0               | 8.9     |
| LTE 16QAM  | Input           | 733.0               | 8.9     |
| LTE 16QAM  | Output          | 733.0               | 8.9     |
| LTE 16QAM  | Input           | 747.0               | 8.9     |
| LTE 16QAM  | Output          | 747.0               | 9.0     |
| LTE 16QAM  | Input           | 753.0               | 8.9     |
| LTE 16QAM  | Output          | 753.0               | 8.9     |
| LTE QPSK   | Input           | 733.0               | 8.9     |
| LTE QPSK   | Output          | 733.0               | 8.9     |
| LTE QPSK   | Input           | 747.0               | 8.9     |
| LTE QPSK   | Output          | 747.0               | 8.9     |
| LTE QPSK   | Input           | 753.0               | 8.9     |
| LTE QPSK   | Output          | 753.0               | 8.9     |

Figure 21 Occupied Bandwidth LTE


JUDGEMENT: Passed

See additional information in *Figure 22* to *Figure 39*.

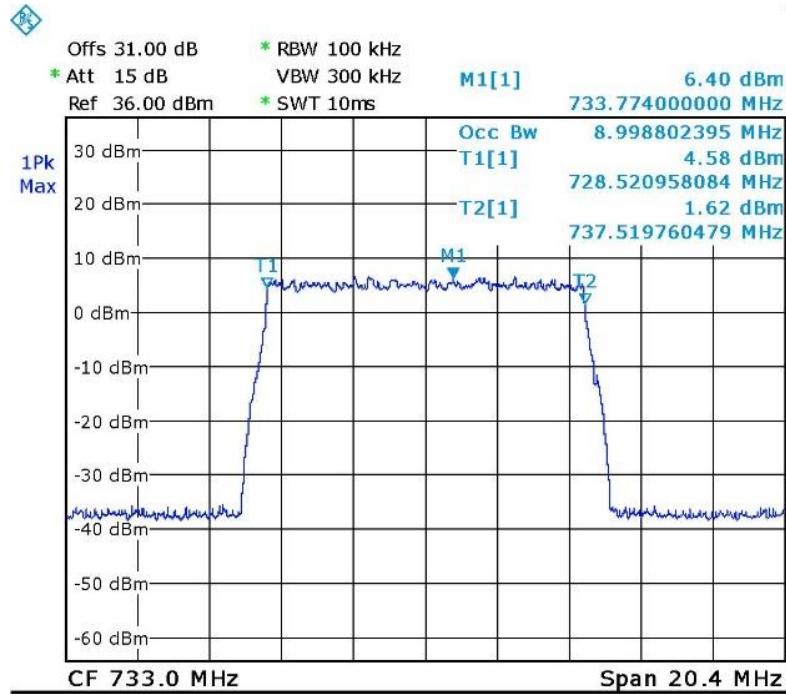


Date: 10.JUL.2016 14:52:10

Figure 22. — 64QAM 733 MHz IN

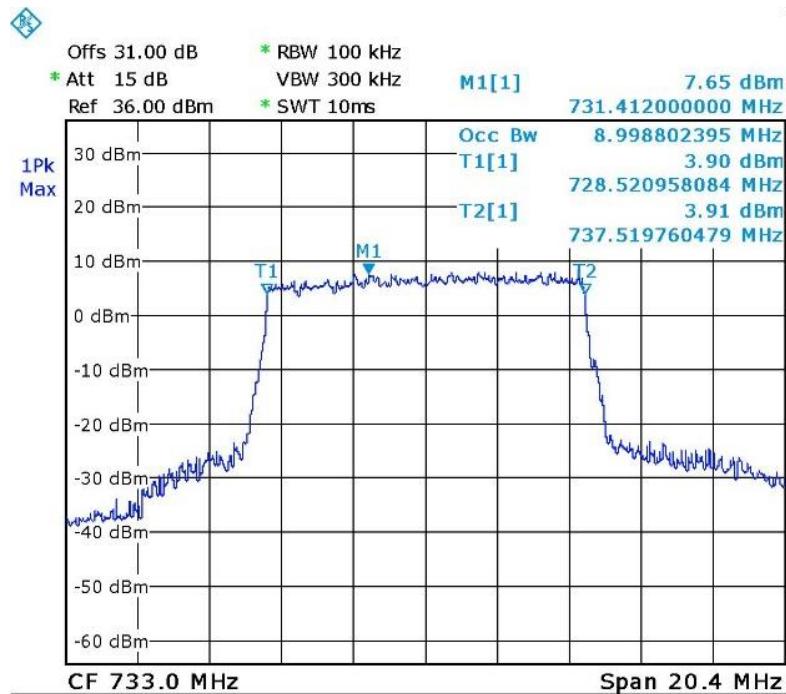


Date: 10.JUL.2016 14:46:48

Figure 23. — 64QAM 733 MHz OUT

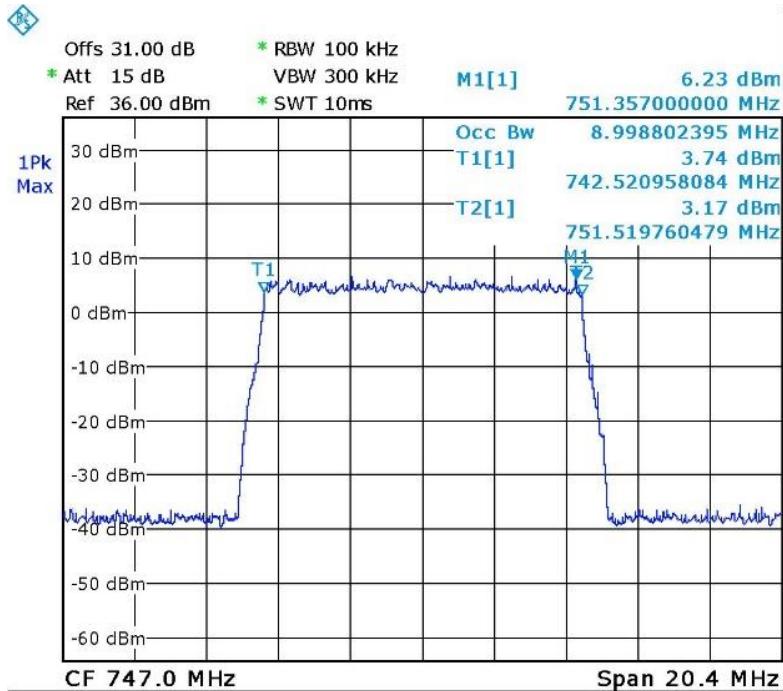


Date: 10.JUL.2016 14:52:35

Figure 24. — 64QAM 747 MHz IN

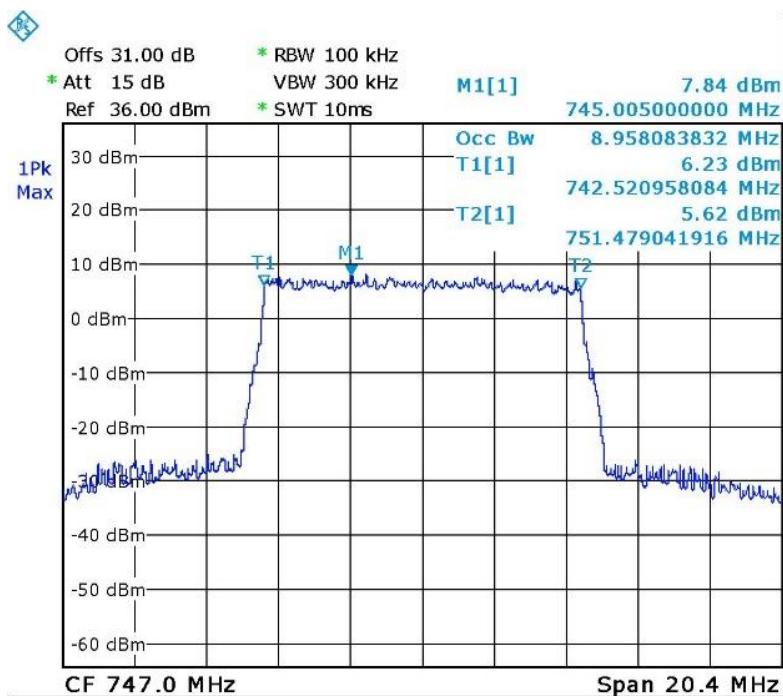


Date: 10.JUL.2016 14:46:11

Figure 25. — 64QAM 747 MHz OUT

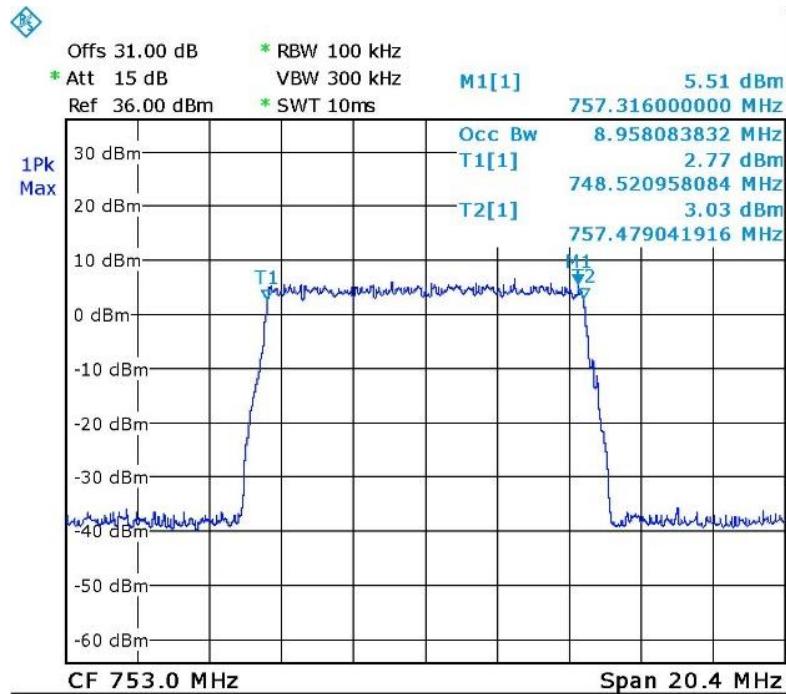


Date: 10.JUL.2016 14:52:56

Figure 26. — 64QAM 753 MHz IN

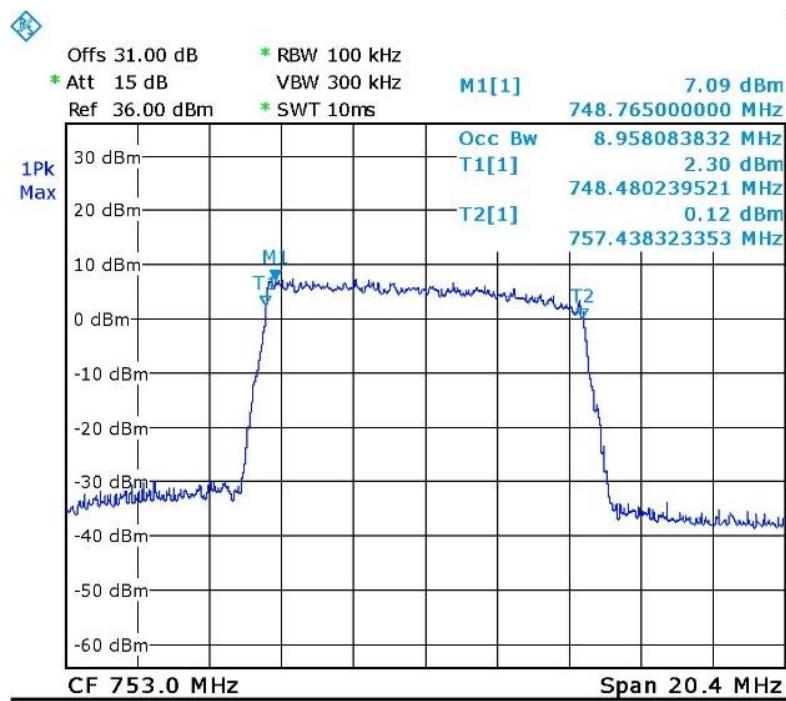


Date: 10.JUL.2016 14:45:36

Figure 27. — 64QAM 753 MHz OUT

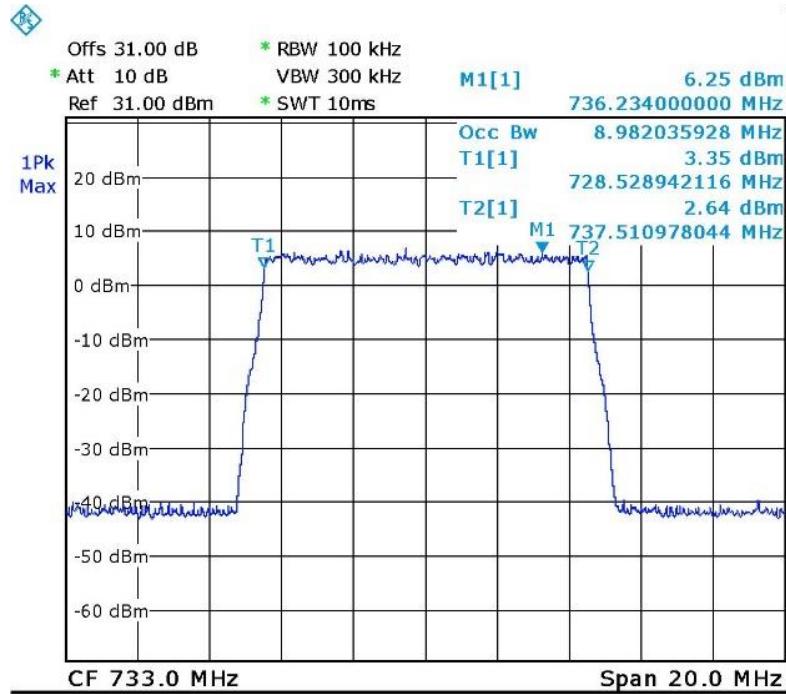


Date: 11.JUL.2016 09:53:38

Figure 28. — 16QAM 733 MHz IN

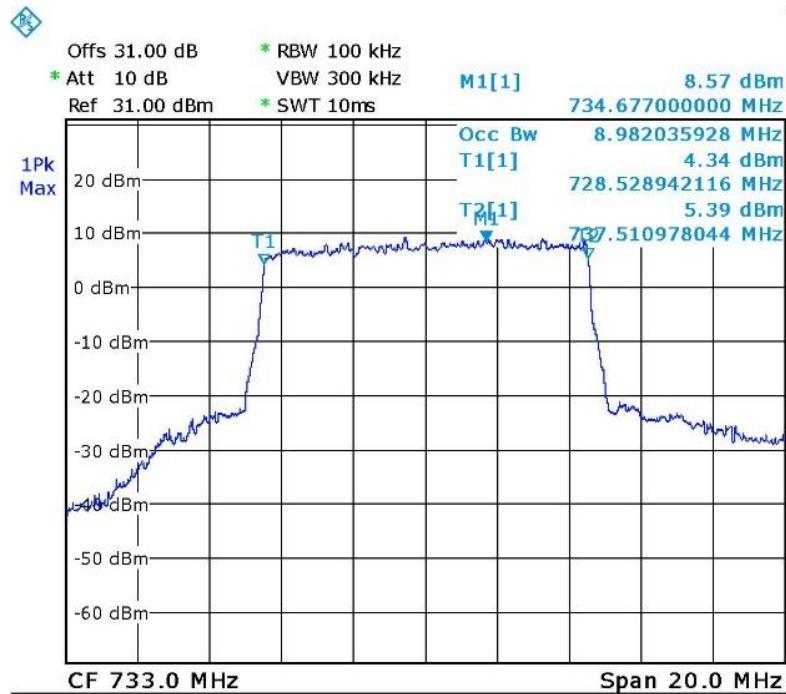


Date: 11.JUL.2016 09:32:16

Figure 29. — 16QAM 733 MHz OUT

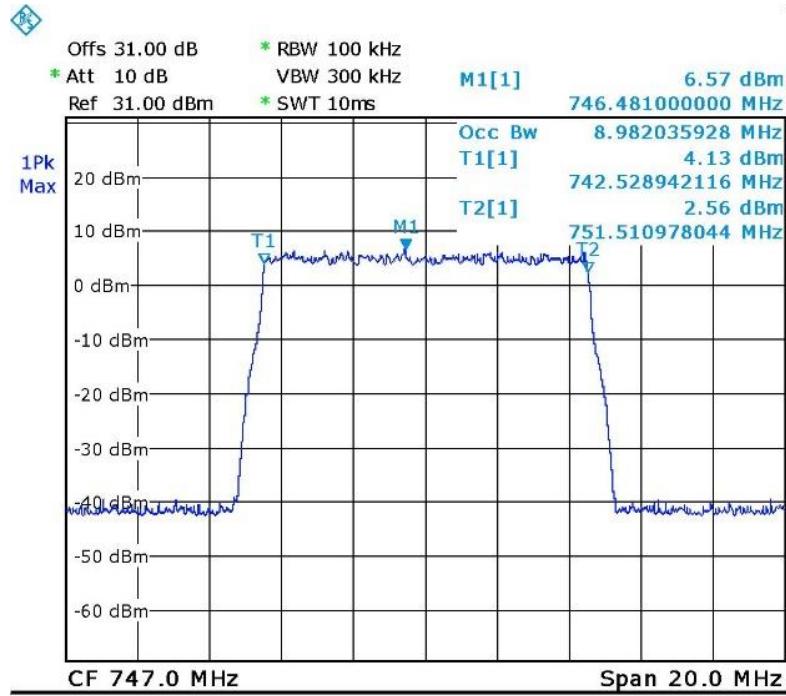


Date: 11.JUL.2016 09:53:02

Figure 30. — 16QAM 747 MHz IN

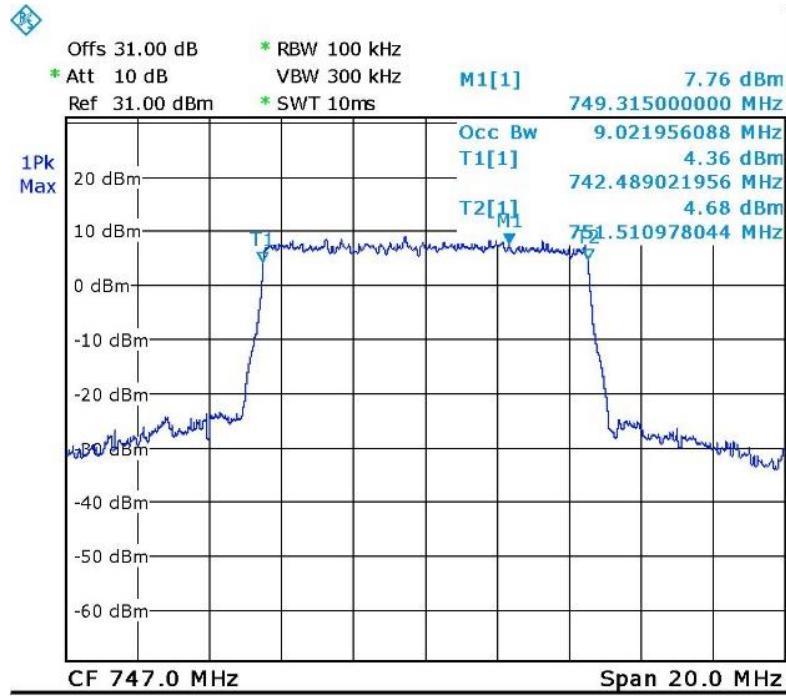


Date: 11.JUL.2016 09:33:36

Figure 31. — 16QAM 747 MHz OUT

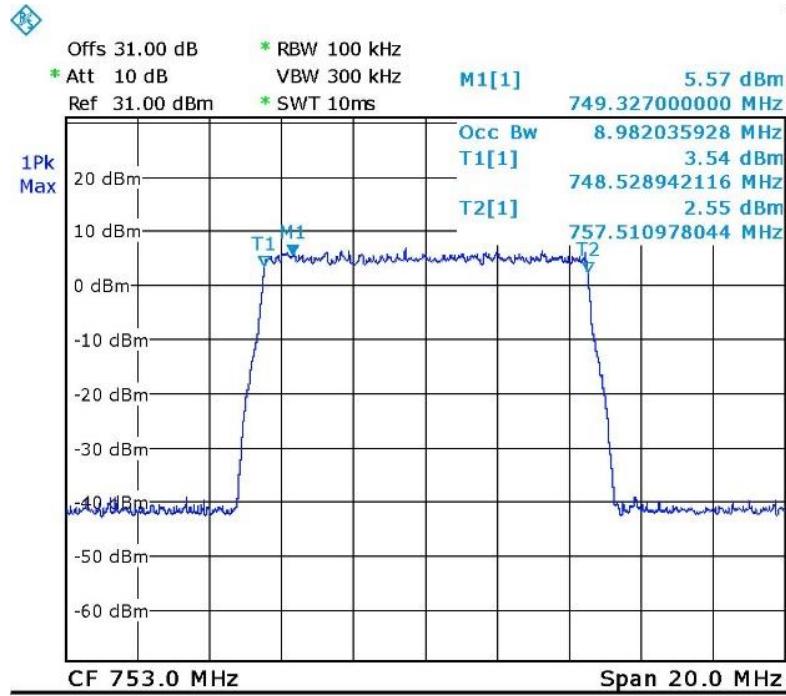


Date: 11.JUL.2016 09:52:20

Figure 32. — 16QAM 753 MHz IN

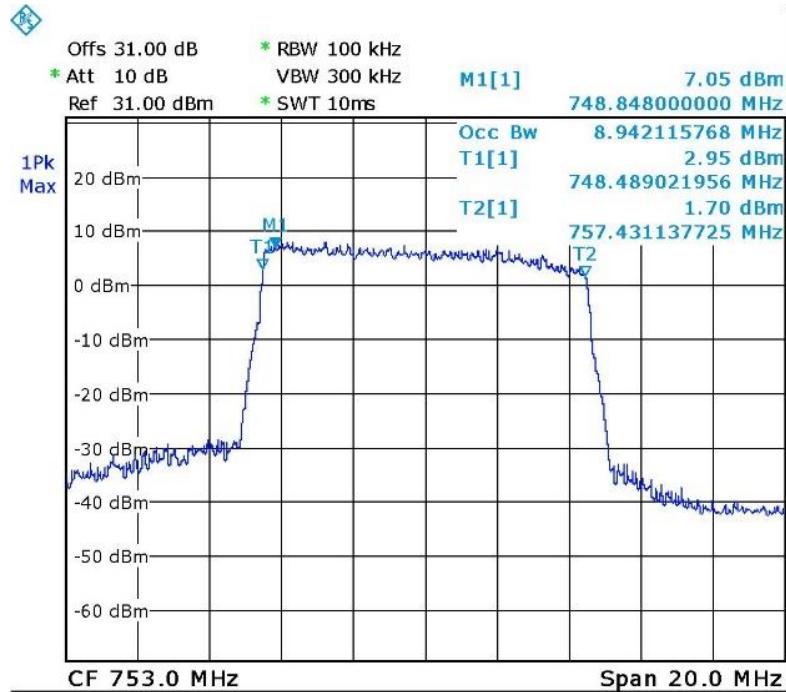


Date: 11.JUL.2016 09:34:13

Figure 33. — 16QAM 753 MHz OUT

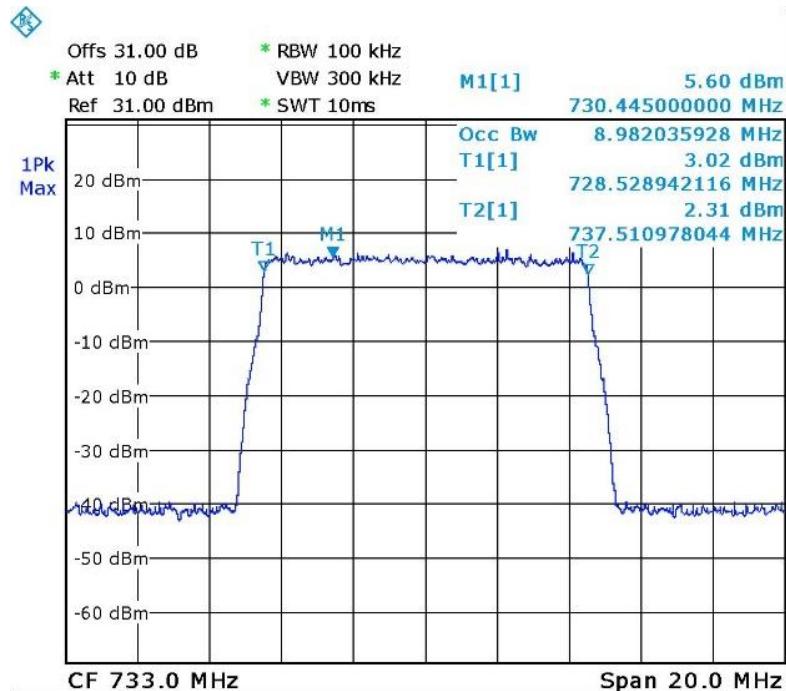


Date: 11.JUL.2016 09:39:50

Figure 34. — QPSK 733 MHz IN

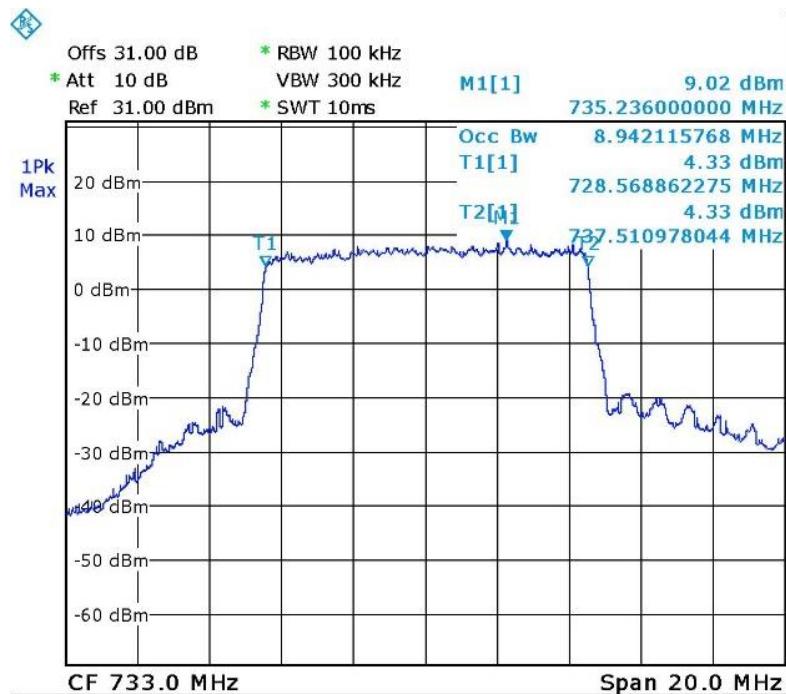


Date: 11.JUL.2016 09:36:39

Figure 35. — QPSK 733 MHz OUT

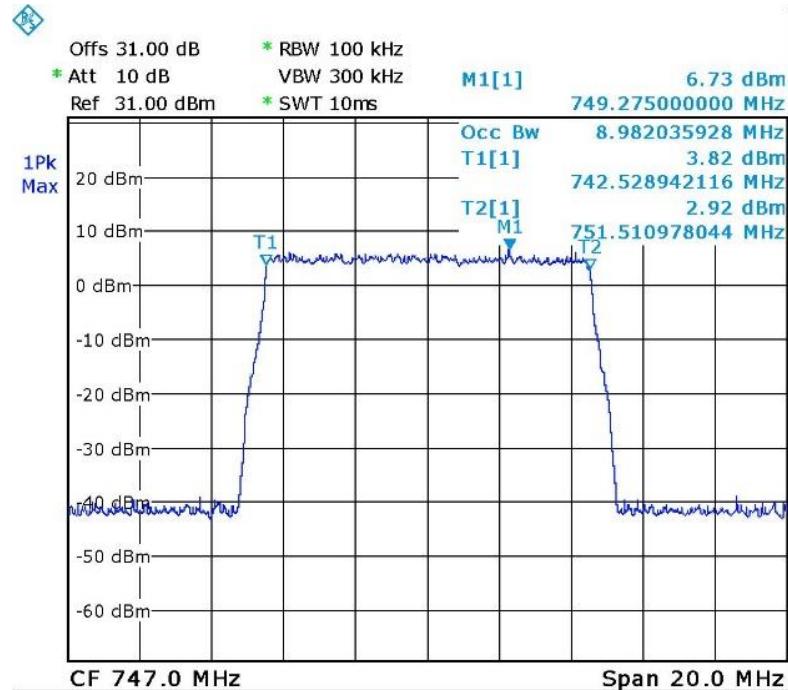


Date: 11.JUL.2016 09:40:28

Figure 36. — QPSK 747 MHz IN

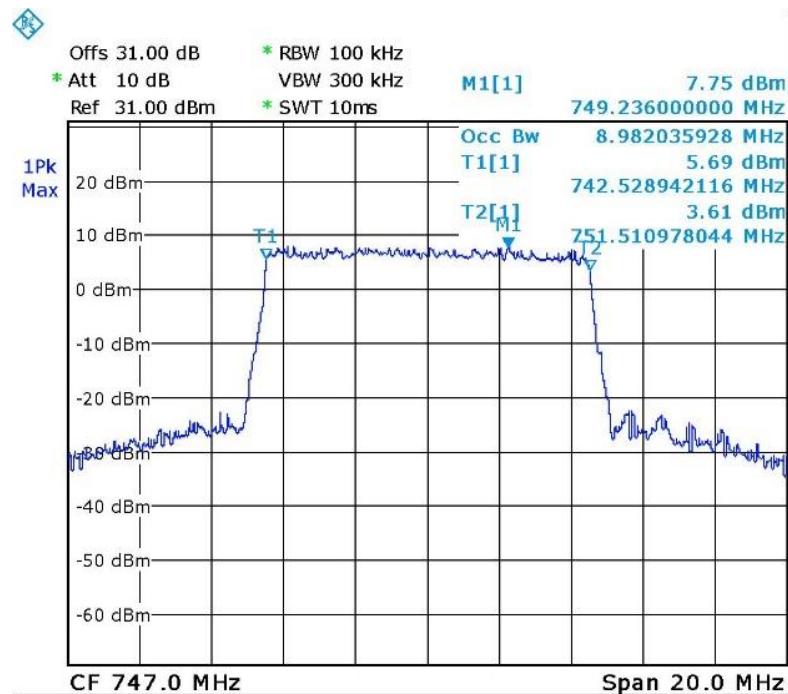


Date: 11.JUL.2016 09:35:43

Figure 37. — QPSK 747 MHz OUT

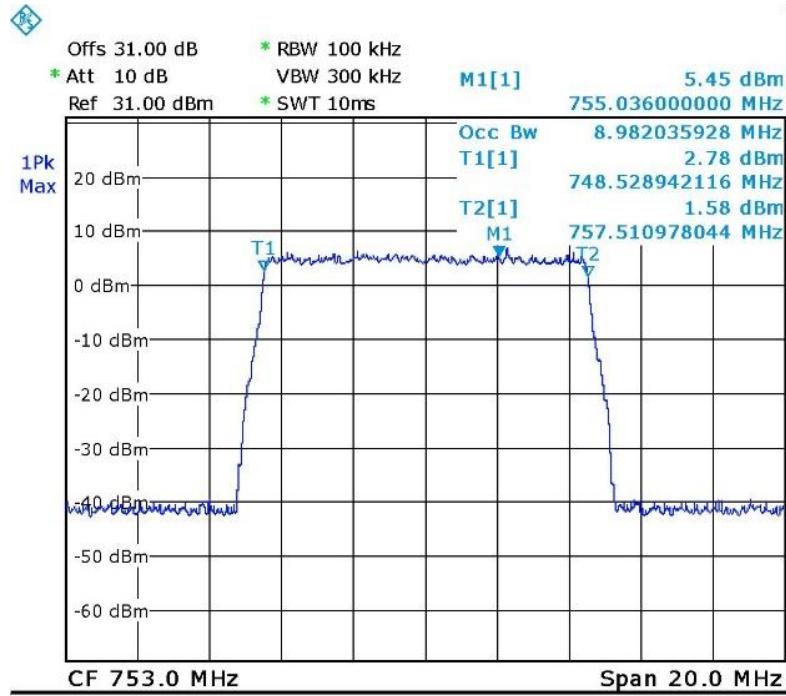

Date: 11.JUL.2016 09:41:34

Figure 38. — QPSK 753 MHz IN

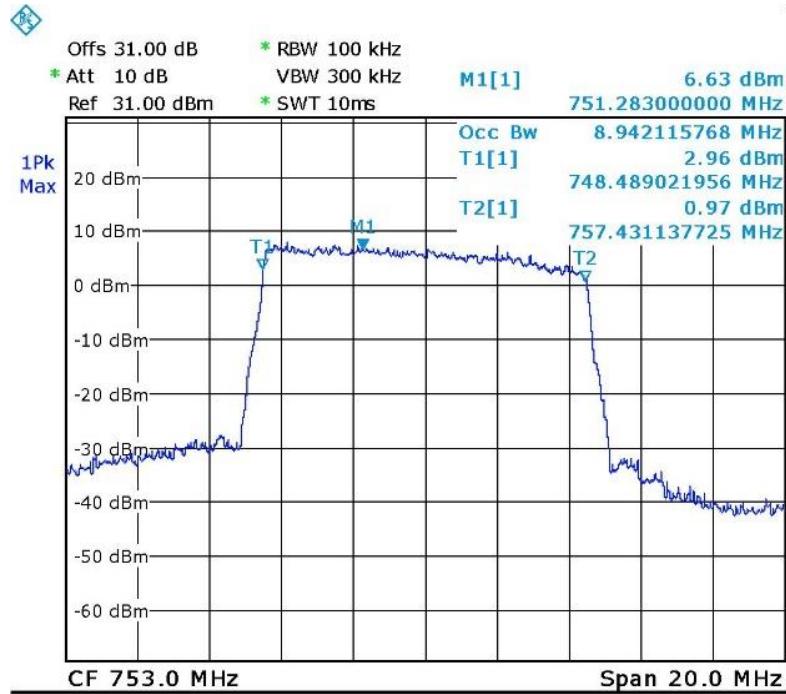

Date: 11.JUL.2016 09:35:09

Figure 39. — QPSK 753 MHz OUT



## 5.5 **Test Equipment Used; Occupied Bandwidth LTE**

| Instrument              | Manufacturer | Model    | Serial Number | Calibration           |                      |
|-------------------------|--------------|----------|---------------|-----------------------|----------------------|
|                         |              |          |               | Last Calibration Date | Next Calibration Due |
| Spectrum Analyzer       | R&S          | FSL6     | 100194        | February 29, 2016     | March 1, 2017        |
| Vector Signal Generator | Agilent      | N5172B   | MY51350584    | July 1, 2016          | July 1, 2017         |
| 30 dB Attenuator        | MCL          | BW-S30W5 | 533           | July 5, 2016          | July 5, 2017         |

**Figure 40 Test Equipment Used**



## 6. Spurious Emissions at Antenna Terminals LTE

### 6.1 ***Test Specification***

FCC Part 27, Subpart C, Sections 27.53(c)(1) (3) 27.53 (g)

### 6.2 ***Test Procedure***

(Temperature (23°C)/ Humidity (36%RH))

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator and an appropriate coaxial cable (max loss=31.5dB).

The spectrum analyzer was set to 1 kHz R.B.W for the frequency range of 9 kHz – 1 MHz, 100 kHz for the frequency range of 1 – 30 MHz, and 1 MHz for the frequency range of 30 MHz – 10 GHz.


### 6.3 ***Test Limit***

The power of any emission outside of the authorized operating frequency ranges (728 -758 MHz) must be attenuated below the transmitting power (P) by a factor of  $43 + 10 \log (P)$  dB.


### 6.4 ***Test Results***

JUDGEMENT: Passed


See additional information in Figure 41 to *Figure 49*.

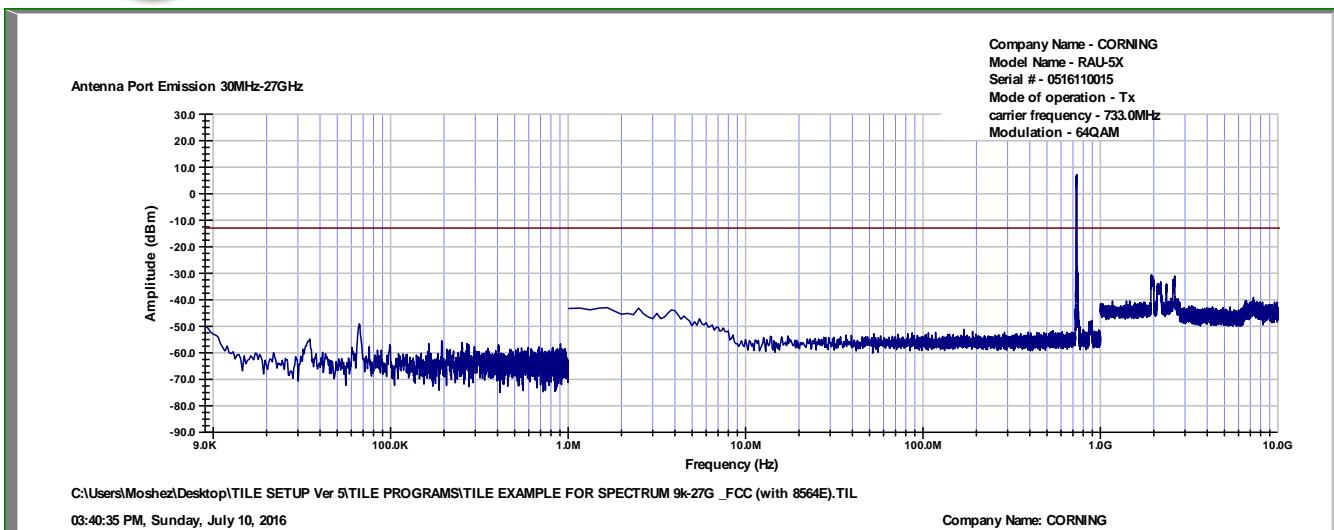

**Figure 41** Spurious Emissions at Antenna Terminals 64QAM, 733MHz

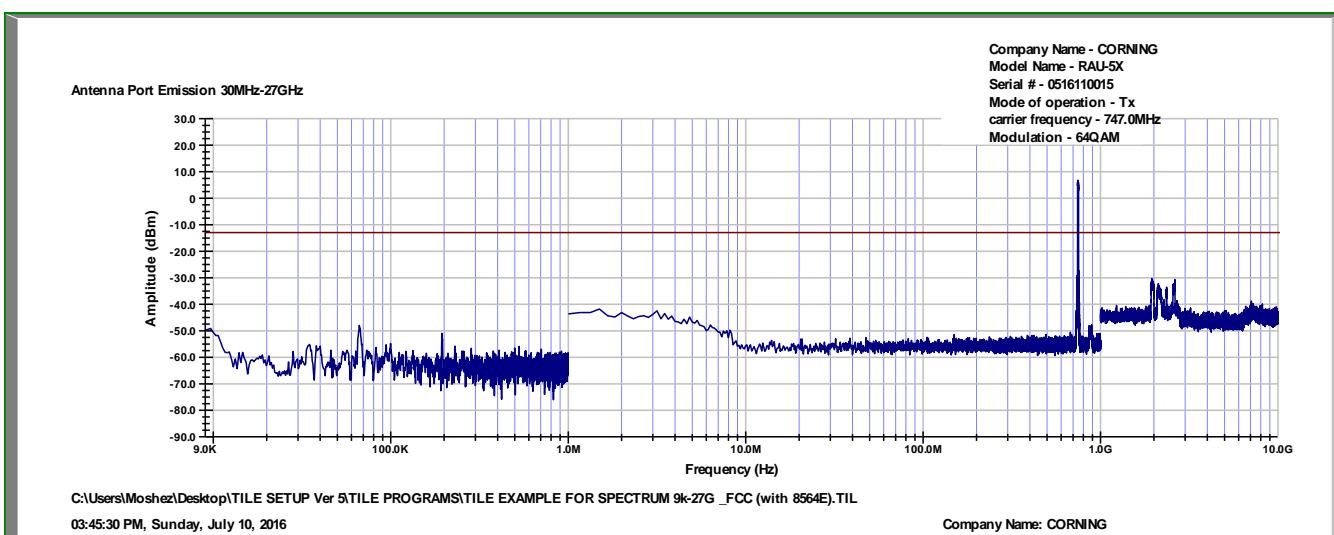

**Figure 42** Spurious Emissions at Antenna Terminals 64QAM, 747MHz

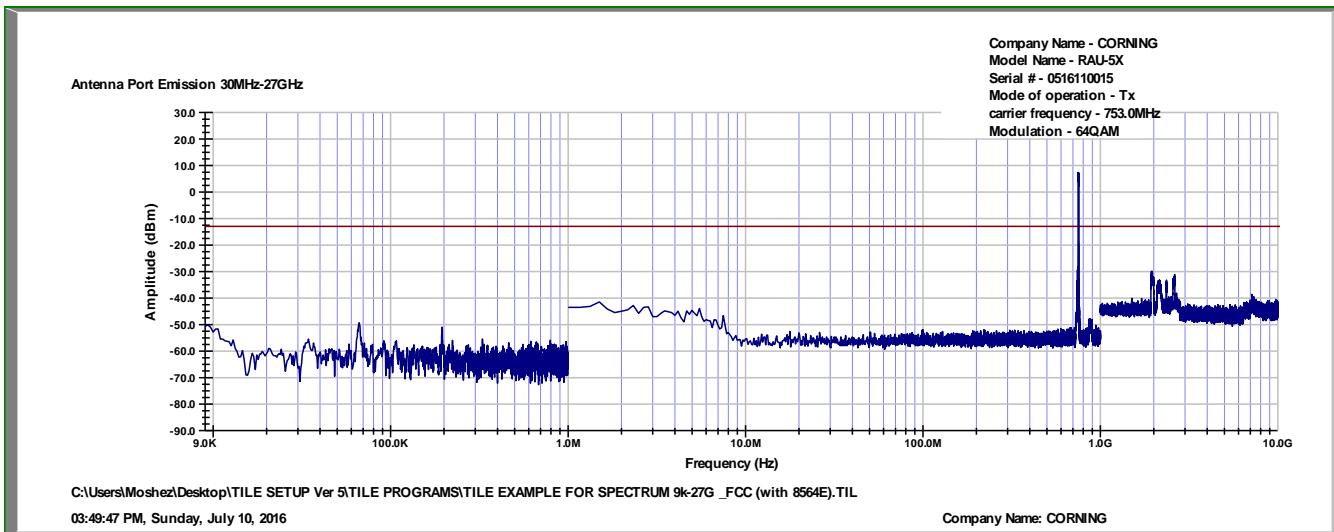

**Figure 43** Spurious Emissions at Antenna Terminals 64QAM, 753MHz

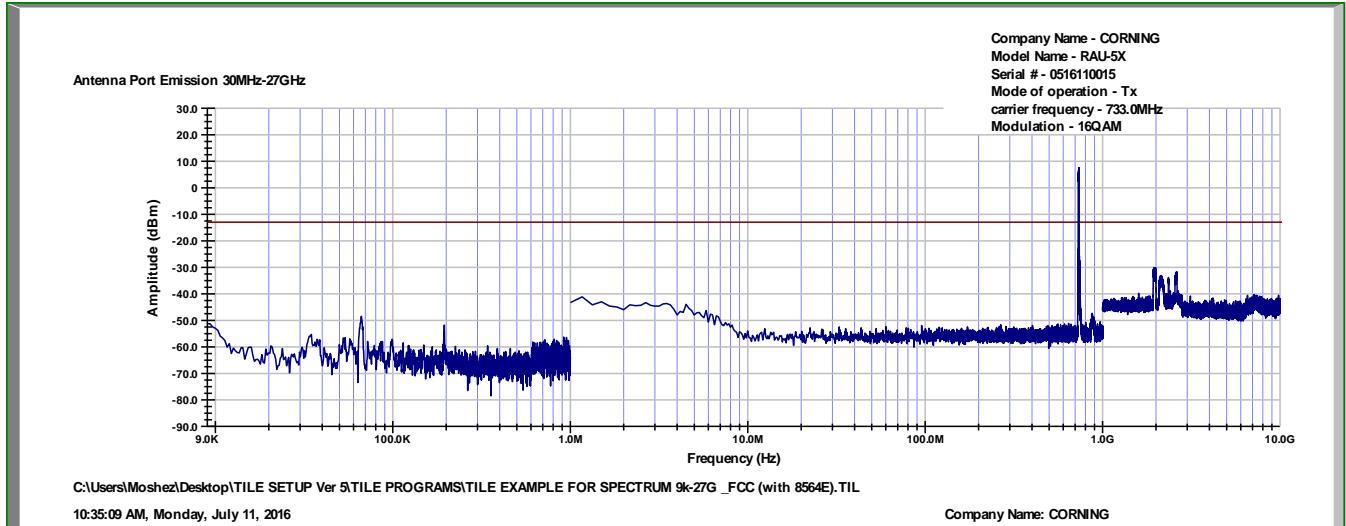


Figure 44 Spurious Emissions at Antenna Terminals 16QAM, 733MHz

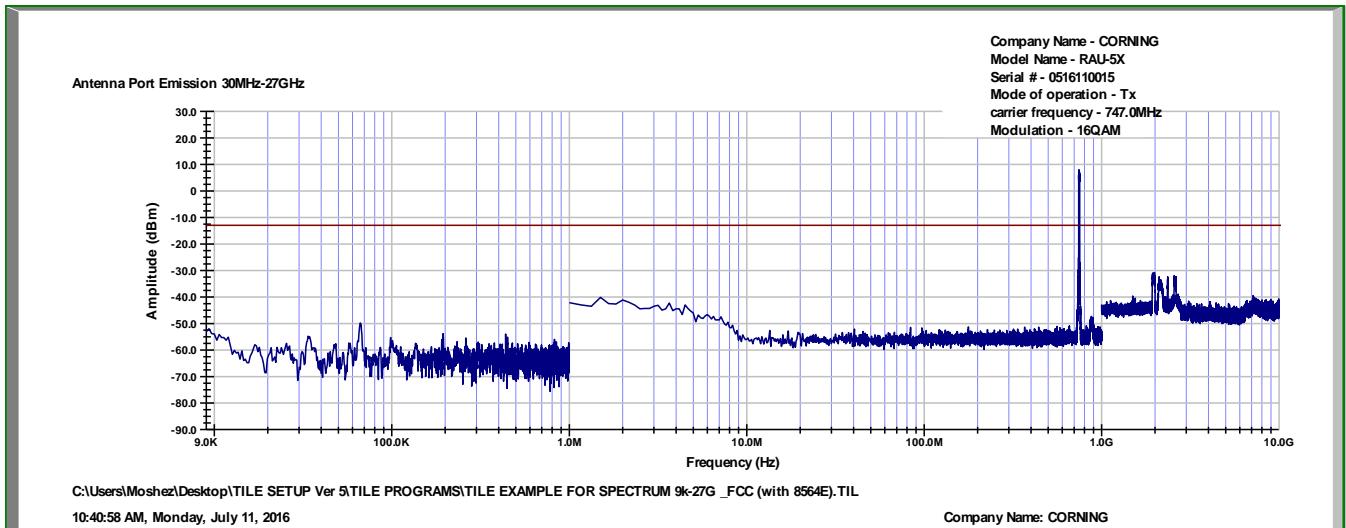


Figure 45 Spurious Emissions at Antenna Terminals 16QAM, 747MHz

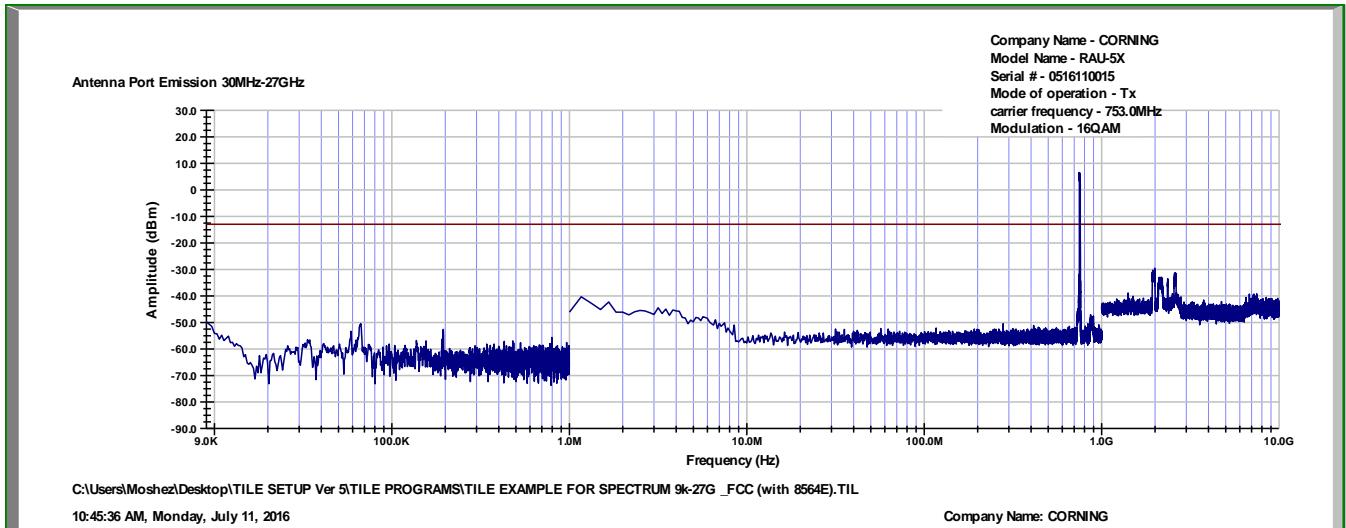


Figure 46 Spurious Emissions at Antenna Terminals 16QAM, 753MHz

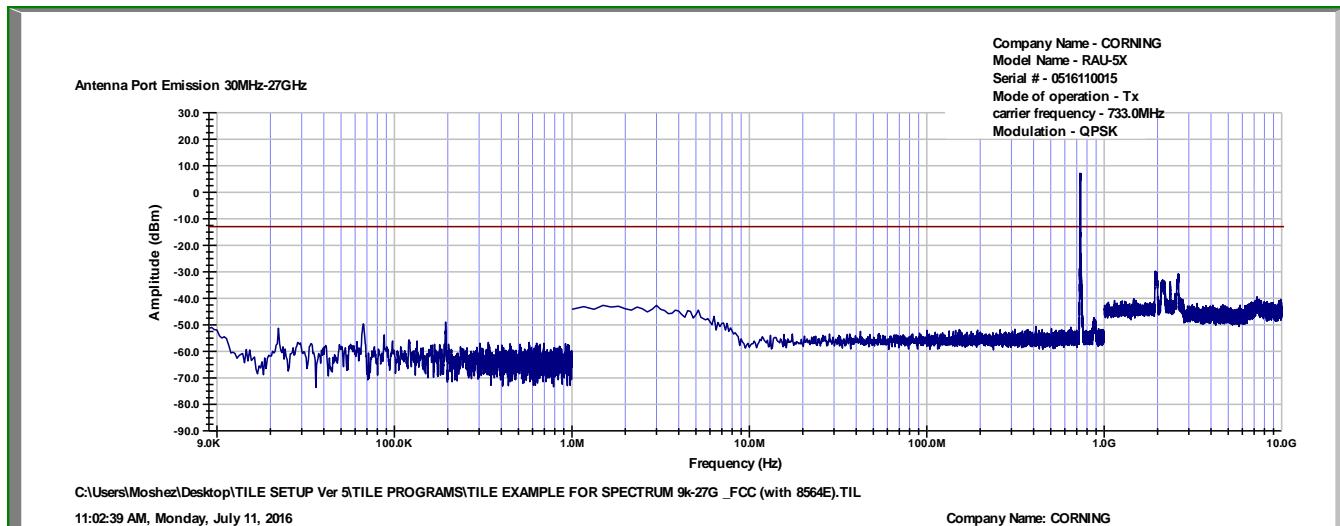


Figure 47 Spurious Emissions at Antenna Terminals QPSK, 733MHz

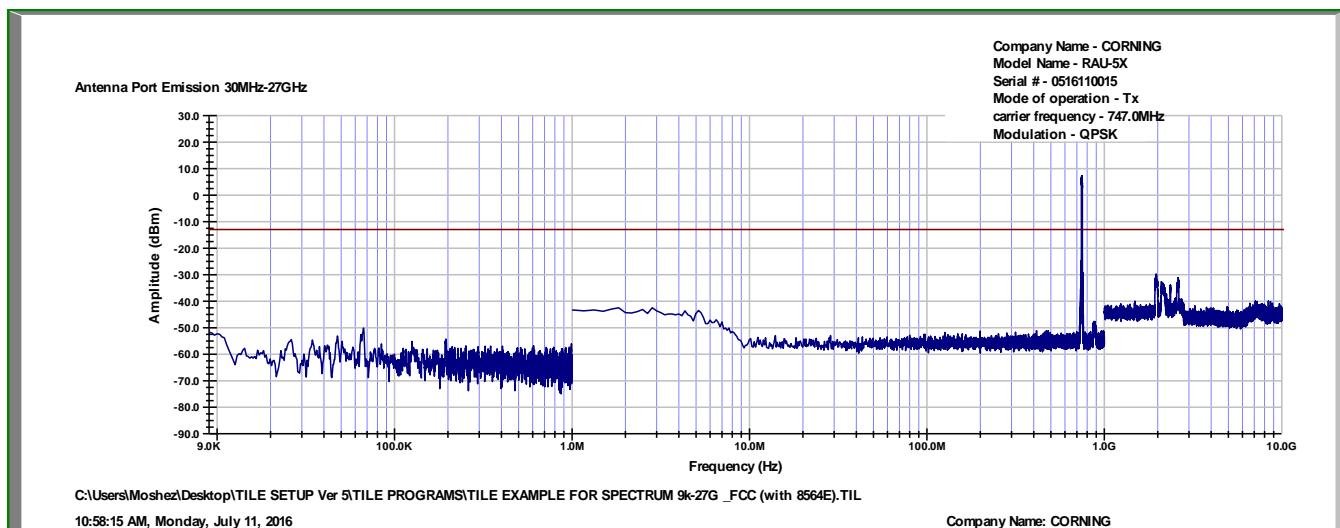


Figure 48 Spurious Emissions at Antenna Terminals QPSK, 747MHz

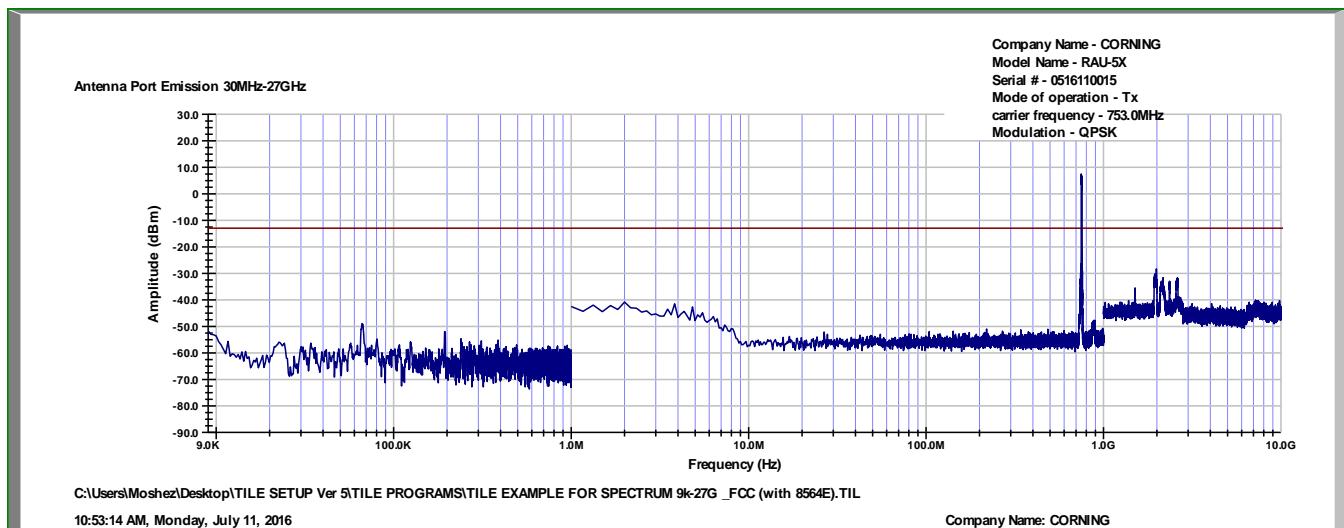


Figure 49 Spurious Emissions at Antenna Terminals QPSK, 753MHz



## 6.5 **Test Equipment Used; Spurious Emissions at Antenna Terminals LTE**

| Instrument                  | Manufacturer | Model    | Serial Number | Calibration           |                      |
|-----------------------------|--------------|----------|---------------|-----------------------|----------------------|
|                             |              |          |               | Last Calibration Date | Next Calibration Due |
| EXG Vector Signal Generator | Agilent      | N5172B   | MY51350584    | July 1, 2016          | July 1, 2017         |
| Spectrum Analyzer           | HP           | 8592L    | 3826A01204    | March 13, 2016        | March 13, 2017       |
| 30 dB Attenuator            | MCL          | BW-S30W5 | 533           | July 5, 2016          | July 5, 2017         |

**Figure 50 Test Equipment Used**



## 7. Band Edge Spectrum LTE

### 7.1 Test Specification

FCC Part 27, Subpart C, Section 27.53 (c)(1)

### 7.2 Test procedure

(Temperature (22°C)/ Humidity (35%RH))

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator and an appropriate coaxial cable (31.0 dB).

The spectrum analyzer was set to 100 kHz R.B.W.

### 7.3 Test Limit

The power of any emission outside of the authorized operating frequency ranges (728 - 758 MHz) must be attenuated below the transmitting power (P) by a factor of at least  $43 + \log(P)$  dB, yielding -13dBm.

### 7.4 Test Results

| Modulation | Operation Frequency<br>(MHz) | Band Edge Frequency<br>(MHz) | Reading<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|------------|------------------------------|------------------------------|------------------|----------------|----------------|
| LTE64QAM   | 733.0                        | 728.0                        | -19.5            | -13.0          | -6.5           |
| LTE64QAM   | 753.0                        | 758.0                        | -20.8            | -13.0          | -7.8           |
| LTE16QAM   | 733.0                        | 728.0                        | -21.1            | -13.0          | -8.1           |
| LTE16QAM   | 753.0                        | 758.0                        | -25.1            | -13.0          | -12.1          |
| LTEQPSK    | 733.0                        | 728.0                        | -23.2            | -13.0          | -10.2          |
| LTEQPSK    | 753.0                        | 758.0                        | -24.2            | -13.0          | -11.2          |

Figure 51 Band Edge Spectrum Results LTE

JUDGEMENT: Passed by 6.5 dB

See additional information in *Figure 52* to *Figure 57*.

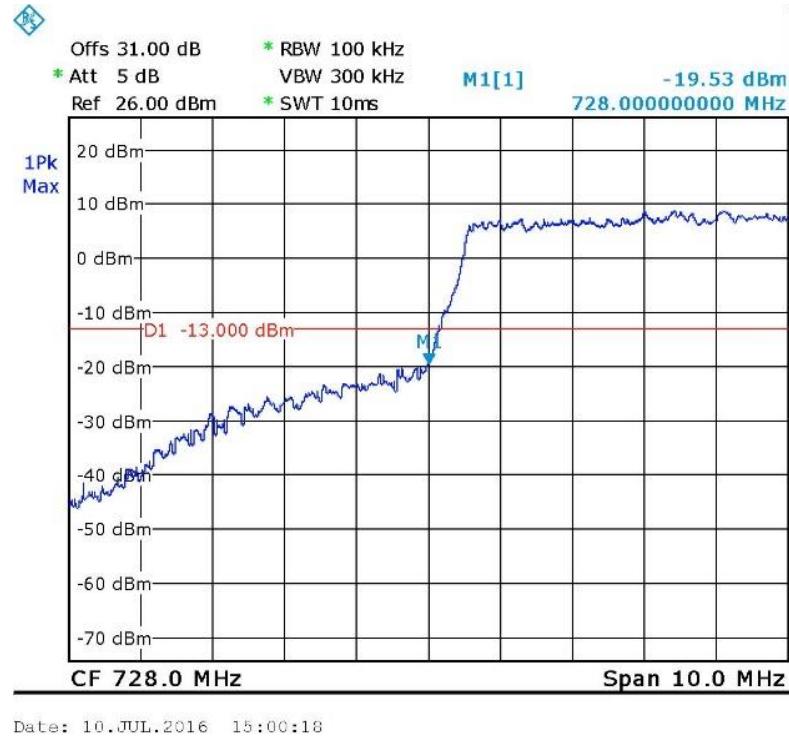


Figure 52.—64QAM 733.0 MHz



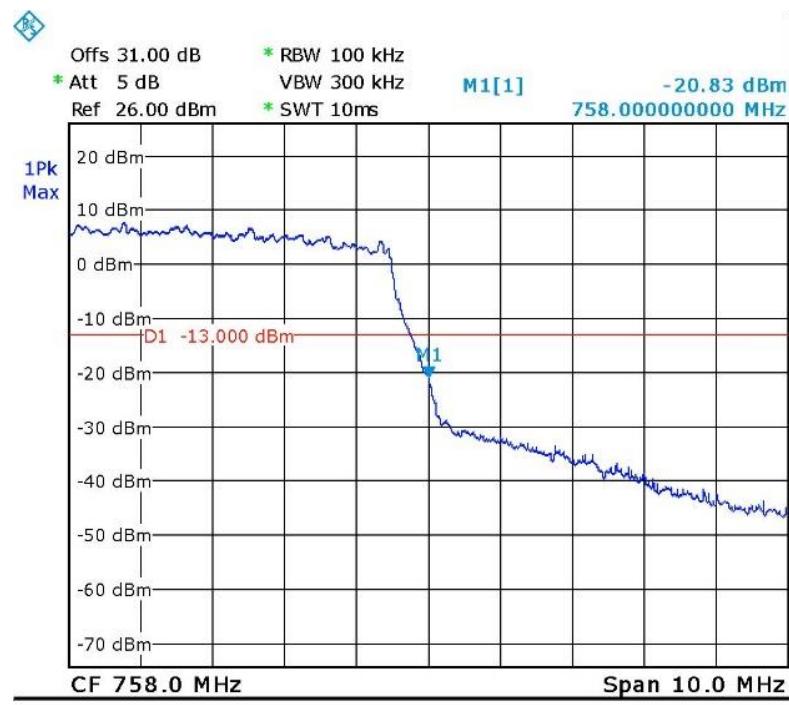


Figure 53. — 64QAM 753.0 MHz

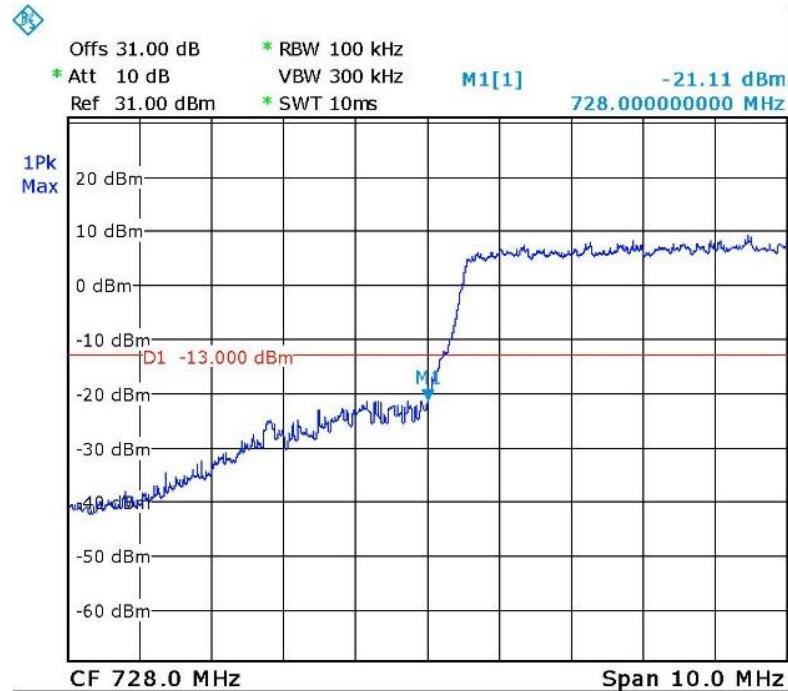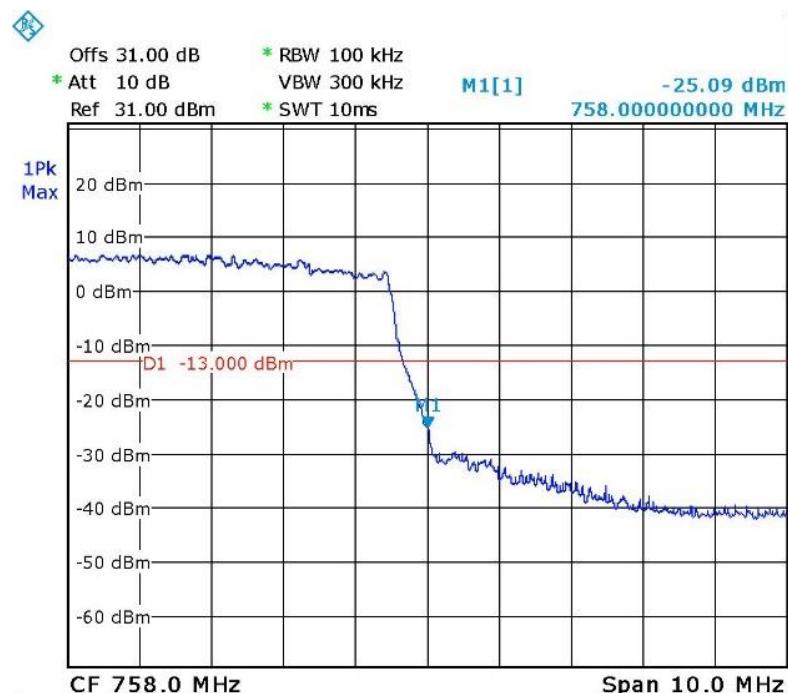

Date: 10.JUL.2016 15:37:48

**Figure 54.—16QAM 733.0 MHz**

Date: 10.JUL.2016 15:36:35

**Figure 55. — 16QAM 753.0 MHz**

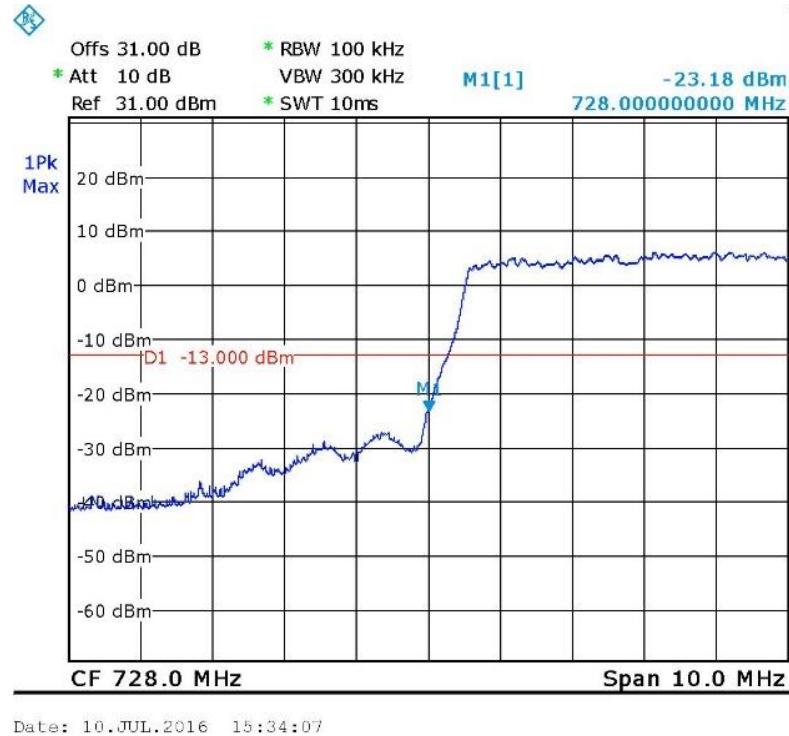


Figure 56. — QPSK 733.0 MHz

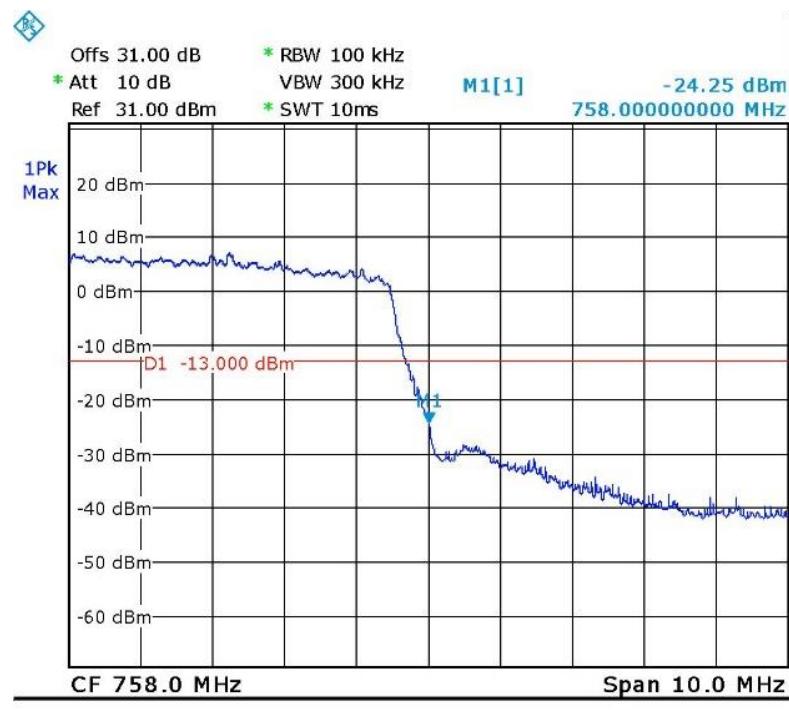


Figure 57. — QPSK 753.0 MHz



## 7.5 Test Equipment Used; Band Edge Spectrum LTE

| Instrument              | Manufacturer | Model    | Serial Number | Calibration           |                      |
|-------------------------|--------------|----------|---------------|-----------------------|----------------------|
|                         |              |          |               | Last Calibration Date | Next Calibration Due |
| Spectrum Analyzer       | R&S          | FSL6     | 100194        | February 29, 2016     | March 1, 2017        |
| Vector Signal Generator | Agilent      | N5172B   | MY51350584    | July 1, 2016          | July 1, 2017         |
| 30 dB Attenuator        | MCL          | BW-S30W5 | 533           | July 5, 2016          | July 5, 2017         |

Figure 58 Test Equipment Used

## 8. Spurious Radiated Emission LTE

### 8.1 ***Test Specification***

FCC, Part 27, Subpart C, Section 27.53 (g)

### 8.2 ***Test Procedure***

(Temperature (27°C)/ Humidity (68%RH))

The test method was based on ANSI/TIA-603-D: 2010, Section 2.2.12 Unwanted Emissions: Radiated Spurious.

#### **For measurements between 0.009MHz-30.0MHz:**

The E.U.T was tested inside the shielded room at a distance of 3 meters and the E.U.T was placed on a non-metallic table, 1.5 meters above the ground. The frequency range 0.009MHz-30MHz was scanned. The readings were maximized by the turntable azimuth between 0-360°, and the antenna polarization. The emissions were measured at a distance of 3 meters.

#### **For measurements between 30.0MHz-1.0GHz:**

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The frequency range 30.0MHz -1.0GHz was scanned and the list of the highest emissions was verified and updated accordingly.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

The emissions were measured at a distance of 3 meters.

#### **For measurements between 1.0GHz-10.0GHz:**

The E.U.T was tested inside the shielded room at a distance of 3 meters and the E.U.T was placed on a non-metallic table, 1.5 meters above the ground. The frequency range 1.0GHz -10.0GHz was scanned. The readings were maximized by the turntable azimuth between 0-360°, and the antenna polarization. The emissions were measured at a distance of 3 meters.

The E.U.T. was replaced by a substitution antenna (dipole 30MHz-1GHz, Horn Antenna above 1GHz) driven by a signal generator. The height was readjusted for maximum reading. The signal generator level was adjusted to obtain the same reading on the EMI receiver as in step (a).

The signals observed in step (a) were converted to radiated power using:

$$P_d(\text{dBm}) = P_g(\text{dBm}) - \text{Cable Loss (dB)} + \text{Substitution Antenna Gain (dBD)}$$

$P_d$  = Dipole equivalent power (result).

$P_g$  = Signal generator output level.

A Peak detector was used for this test.

The test was performed in 3 operation frequencies: low mid and high.

Testing was performed when the RF port was connected to 50 Ω termination.

The table below describe only results with the highest radiation.



### 8.3 Test Limit

The power of any emission outside of the authorized operating frequency ranges (728-758MHz) must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB, yielding  $-13$  dBm.

### 8.4 Test Results

| Carrier Channel<br>(MHz) | Freq.<br>(MHz) | Antenna Pol.<br>(V/H) | Maximum Peak Level<br>(dB $\mu$ V/m) | Signal Generator RF Output<br>(dBm) | Cable Loss<br>(dB) | Antenna Gain<br>(dBd) | Effective Radiated Power Level<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|--------------------------|----------------|-----------------------|--------------------------------------|-------------------------------------|--------------------|-----------------------|---|----------------|----------------|
| 733.0                    | 1466.0         | V                     | 50.3                                 | -49.3                               | 0.5                | 6.0                   | -43.8                                   | -13.00         | -30.8          |
|                          | 1466.0         | H                     | 50.4                                 | -49.2                               | 0.5                | 6.0                   | -43.7                                   | -13.00         | -30.7          |
| 747.0                    | 1494.0         | V                     | 50.4                                 | -49.3                               | 0.5                | 6.0                   | -43.8                                   | -13.00         | -30.8          |
|                          | 1494.0         | H                     | 50.4                                 | -49.2                               | 0.5                | 6.0                   | -43.7                                   | -13.00         | -30.7          |
| 753.0                    | 1506.0         | V                     | 50.5                                 | -49.2                               | 0.5                | 6.0                   | -43.7                                   | -13.00         | -30.7          |
|                          | 1506.0         | H                     | 50.6                                 | -49.0                               | 0.5                | 6.0                   | -43.5                                   | -13.00         | -30.5          |

Figure 59 Spurious Radiated Emission LTE

JUDGEMENT: Passed by 30.5dB

The E.U.T met the requirements of the FCC, Part 27, Subpart C, Section 27.53 (g) specifications.



## 8.5 Test Instrumentation Used; Radiated Measurements

| Instrument                  | Manufacturer    | Model            | Serial Number | Calibration           |                      |
|-----------------------------|-----------------|------------------|---------------|-----------------------|----------------------|
|                             |                 |                  |               | Last Calibration Date | Next Calibration Due |
| EMI Receiver                | HP              | 85422E           | 3906A00276    | March 3, 2016         | March 3, 2017        |
| RF Filter Section           | HP              | 85420E           | 3705A00248    | March 3, 2016         | March 3, 2017        |
| EMI Receiver                | R&S             | ESCI7            | 100724        | February 29, 2016     | March 1, 2017        |
| Spectrum Analyzer           | HP              | 8593EM           | 3536A00120ADI | March 10, 2016        | March 10, 2017       |
| Active Loop Antenna         | EMCO            | 6502             | 9506-2950     | November 5, 2015      | November 30, 2016    |
| Antenna Biconical           | EMCO            | 3110B            | 9912-3337     | March 24, 2016        | March 24, 2018       |
| Antenna Log Periodic        | EMCO            | 3146             | 9505-4081     | April 23, 2016        | April 23, 2017       |
| Horn Antenna 1G-18G         | ETS             | 3115             | 29845         | May 19, 2015          | May 19, 2018         |
| Low Noise Amplifier         | Narda           | LNA-DBS-0411N313 | 013           | March 1, 2015         | September 30, 2016   |
| Low Noise Amplifier         | Sophia Wireless | LNA 28-B         | 232           | March 1, 2015         | September 30, 2016   |
| MXG Vector Signal Generator | Agilent         | N5182A           | MY49060440    | July 1, 2016          | July 1, 2017         |
| Semi Anechoic Civil Chamber | ETS             | S81              | SL 11643      | N/A                   | N/A                  |
| Antenna Mast                | ETS             | 2070-2           | -             | N/A                   | N/A                  |
| Turntable                   | ETS             | 2087             | -             | N/A                   | N/A                  |
| Mast & Table Controller     | ETS/EMCO        | 2090             | 9608-1456     | N/A                   | N/A                  |

Figure 60 Test Equipment Used

## 9. Intermodulation Conducted

### 9.1 Test Procedure

(Temperature (22°C)/ Humidity (37%RH))

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator and an appropriate coaxial cable (max loss = 40.0dB). The spectrum analyzer was set to 1 kHz resolution BW for the frequency range 9.0-150.0 kHz, 10 kHz for the frequency range 150 kHz–1.0 MHz, 100 kHz for the frequency range 1.0 MHz – 30 MHz, and 1MHz for the frequency range 30 MHz - 24GHz.

6 input signals were sent simultaneously to the E.U.T. as follows:

LTE band: 742.0 MHz, 0 dBm

CELL&ESMR band: 878.0 MHz, 0 dBm

PCS band: 1962.5 MHz, 0 dBm

AWS-3 band: 2145.0 MHz, 0 dBm

WCS band: 2355.0MHz, 0 dBm

TDD 2.5G band: 2593.0MHz, 0 dBm

The frequency range of 9 kHz – 24.0 GHz was scanned for unwanted signals.

### 9.2 Test Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB, yielding -13dBm.

### 9.3 Test Results

JUDGEMENT: Passed

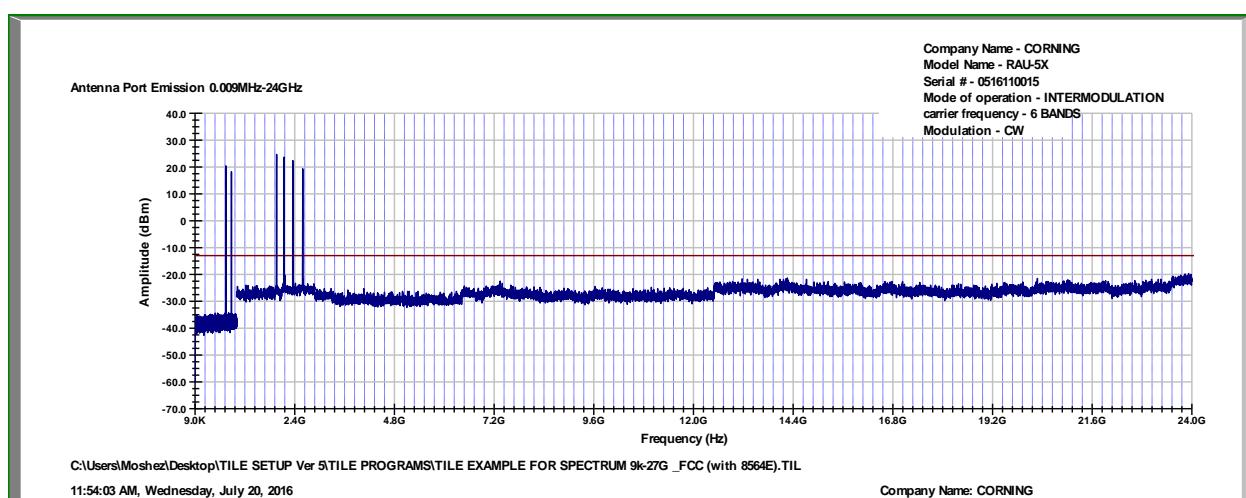


Figure 61 Intermodulation Conducted



**9.4 Test Equipment Used; Intermodulation Conducted**

| Instrument                  | Manufacturer         | Model      | Serial Number | Calibration           |                      |
|-----------------------------|----------------------|------------|---------------|-----------------------|----------------------|
|                             |                      |            |               | Last Calibration Date | Next Calibration Due |
| Spectrum Analyzer           | HP                   | 8564E      | 3442A00275    | March 10, 2016        | March 10, 2017       |
| EXG Vector Signal Generator | Agilent              | N5172B     | TE4384        | July 1, 2016          | July 1, 2017         |
| EXG Vector Signal Generator | Agilent              | N5172B     | MY513500584   | July 1, 2016          | July 1, 2017         |
| MXG Vector Signal Generator | Agilent              | N5182A     | MY48180244    | July 1, 2016          | July 1, 2017         |
| MXG Vector Signal Generator | Agilent              | N5182A     | MY49060440    | July 1, 2016          | July 1, 2017         |
| Signal Generator            | HP                   | E4432B     | GB40050998    | July 1, 2016          | July 1, 2017         |
| ESG Vector Signal Generator | Agilent              | E4438C     | MY45094064    | July 1, 2016          | July 1, 2017         |
| 30 dB Attenuator            | MCL                  | BW-S30W5   | 533           | July 5, 2016          | July 5, 2017         |
| 6 dB Attenuator             | Weinschel Associates | WA 40-6-34 | 568           | July 6, 2016          | July 6, 2017         |

**Figure 62 Test Equipment Used**

## 10. Intermodulation Radiated

### 10.1 Test Procedure

(Temperature (27°C)/ Humidity (68%RH))

The test method was based on ANSI/TIA-603-D: 2010, Section 2.2.12 Unwanted Emissions: Radiated Spurious.

#### For measurements between 0.009MHz-30.0MHz:

The E.U.T was tested inside the shielded room at a distance of 3 meters and the E.U.T was placed on a non-metallic table, 1.5 meters above the ground. The frequency range 0.009MHz-30MHz was scanned. The readings were maximized by the turntable azimuth between 0-360°, and the antenna polarization. The emissions were measured at a distance of 3 meters.

#### For measurements between 30.0MHz-1.0GHz:

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The frequency range 30.0MHz -1.0GHz was scanned and the list of the highest emissions was verified and updated accordingly.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

The emissions were measured at a distance of 3 meters.

#### For measurements between 1.0GHz-24.0GHz:

The E.U.T was tested inside the shielded room at a distance of 3 meters and the E.U.T was placed on a non-metallic table, 1.5 meters above the ground. The frequency range 1.0GHz -24.0GHz was scanned. The readings were maximized by the turntable azimuth between 0-360°, and the antenna polarization.

The emissions were measured at a distance of 3 meters.

The E.U.T. was replaced by a substitution antenna (dipole 30MHz-1GHz, Horn Antenna above 1GHz) driven by a signal generator. The height was readjusted for maximum reading. The signal generator level was adjusted to obtain the same reading on the EMI receiver as in step (a).

The signals observed in step (a) were converted to radiated power using:

$$P_d(\text{dBm}) = P_g(\text{dBm}) - \text{Cable Loss (dB)} + \text{Substitution Antenna Gain (dBd)}$$

$P_d$  = Dipole equivalent power (result).

$P_g$  = Signal generator output level.

6 input signals were sent simultaneously to the E.U.T. as follows:

LTE band: 742.0 MHz, 0 dBm

CELL&ESMR band: 878.0 MHz, 0 dBm

PCS band: 1962.5 MHz, 0 dBm

AWS-3 band: 2145.0MHz, 0 dBm

WCS band: 2355.0MHz, 0 dBm

TDD 2.5G band: 2593.0MHz, 0 dBm



A Peak detector was used for this test.

The test was performed in 3 operation frequencies: low, mid and high.

Testing was performed when the RF port was connected to  $50 \Omega$  termination.

The table below describe only results with the highest radiation.

## 10.2 Test Limit

The power of any emission outside of the authorized operating frequency ranges (MHz) must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB, yielding  $-13$  dBm.

## 10.3 Test Results

JUDGEMENT: Passed

| Freq.<br>(MHz) | Antenna<br>Pol. | Maximum<br>Peak Level<br>(dB $\mu$ V/m) | Signal<br>Generator<br>RF Output<br>(dBm) | Cable<br>Loss<br>(dB) | Antenna<br>Gain<br>(dBd) | Effective<br>Radiated<br>Power Level<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|----------------|-----------------|---|---|-----------------------|--------------------------|---|----------------|----------------|
| 1009.0         | V               | 50.0                                    | -49.6                                     | 0.5                   | 6.0                      | -44.1   | -13.0          | -31.1          |
| 1009.0         | H               | 50.0                                    | -49.2                                     | 0.5                   | 6.0                      | -43.7   | -13.0          | -30.7          |
| 1332.0         | V               | 50.3                                    | -49.1                                     | 0.5                   | 6.0                      | -43.6   | -13.0          | -30.6          |
| 1332.0         | H               | 50.2                                    | -49.2                                     | 0.5                   | 6.0                      | -43.7   | -13.0          | -30.7          |
| 1372.5         | V               | 50.4                                    | -49.1                                     | 0.5                   | 6.0                      | -43.6   | -13.0          | -30.6          |
| 1372.5         | H               | 50.3                                    | -49.2                                     | 0.5                   | 6.0                      | -43.7   | -13.0          | -30.7          |
| 2093.5         | V               | 50.5                                    | -50.2                                     | 0.5                   | 7.0                      | -43.7   | -13.0          | -30.7          |
| 2093.5         | H               | 50.4                                    | -49.6                                     | 0.5                   | 7.0                      | -43.1   | -13.0          | -30.1          |
| 2565.0         | V               | 53.7                                    | -47.0                                     | 0.5                   | 7.0                      | -40.5   | -13.0          | -27.5          |
| 2565.0         | H               | 53.4                                    | -46.6                                     | 0.5                   | 7.0                      | -40.1   | -13.0          | -27.1          |
| 3223.5         | V               | 56.4                                    | -48.5                                     | 0.5                   | 10.0                     | -39.0   | -13.0          | -26            |
| 3223.5         | H               | 56.3                                    | -48.2                                     | 0.5                   | 10.0                     | -38.7   | -13.0          | -25.7          |
| 3413.0         | V               | 56.5                                    | -48.5                                     | 0.5                   | 10.0                     | -39.0   | -13.0          | -26            |
| 3413.0         | H               | 56.5                                    | -48.2                                     | 0.5                   | 10.0                     | -38.7   | -13.0          | -25.7          |
| 3832.0         | V               | 56.2                                    | -42.7                                     | 0.5                   | 9.5                      | -33.7   | -13.0          | -20.7          |
| 3832.0         | H               | 56.3                                    | -42.4                                     | 0.5                   | 9.5                      | -33.4   | -13.0          | -20.4          |
| 4444.0         | V               | 56.5                                    | -42.3                                     | 0.5                   | 9.5                      | -33.3   | -13.0          | -20.3          |
| 4444.0         | H               | 56.6                                    | -42.1                                     | 0.5                   | 9.5                      | -33.1   | -13.0          | -20.1          |
| 5099.0         | V               | 56.9                                    | -46.2                                     | 0.5                   | 10.8                     | -35.9   | -13.0          | -22.9          |
| 5099.0         | H               | 56.7                                    | -45.0                                     | 0.5                   | 10.8                     | -34.7   | -13.0          | -21.7          |

Figure 63 Intermodulation Radiated Results



**10.4 Test Instrumentation Used; Radiated Measurements Intermodulation**

| Instrument                  | Manufacturer    | Model            | Serial Number | Calibration           |                      |
|-----------------------------|-----------------|------------------|---------------|-----------------------|----------------------|
|                             |                 |                  |               | Last Calibration Date | Next Calibration Due |
| EMI Receiver                | HP              | 85422E           | 3906A00276    | March 3, 2016         | March 3, 2017        |
| RF Filter Section           | HP              | 85420E           | 3705A00248    | March 3, 2016         | March 3, 2017        |
| EMI Receiver                | R&S             | ESCI7            | 100724        | February 29, 2016     | March 1, 2017        |
| Spectrum Analyzer           | HP              | 8593EM           | 3536A00120ADI | March 10, 2016        | March 10, 2017       |
| Active Loop Antenna         | EMCO            | 6502             | 9506-2950     | November 5, 2015      | November 30, 2016    |
| Antenna Biconical           | EMCO            | 3110B            | 9912-3337     | March 24, 2016        | March 24, 2018       |
| Antenna Log Periodic        | EMCO            | 3146             | 9505-4081     | April 23, 2016        | April 23, 2017       |
| Horn Antenna 1G-18G         | ETS             | 3115             | 29845         | May 19, 2015          | May 19, 2018         |
| Horn Antenna 18G-26G        | ARA             | SWH-28           | 1007          | March 30, 2014        | September 30, 2016   |
| Low Noise Amplifier         | Narda           | LNA-DBS-0411N313 | 013           | March 1, 2015         | September 30, 2016   |
| Low Noise Amplifier         | Sophia Wireless | LNA 28-B         | 232           | March 1, 2015         | September 30, 2016   |
| Signal Generator            | Marconi         | 2022D            | 119196015     | March 1, 2016         | March 1, 2017        |
| Signal Generator            | HP              | 8648C            | 3623A04126    | February 29, 2016     | March 1, 2017        |
| Signal Generator            | HP              | ESG-4000A/E4422A | US36220118    | February 29, 2016     | March 1, 2017        |
| MXG Vector Signal Generator | Agilent         | N5182A           | MY49060440    | July 1, 2016          | July 1, 2017         |
| ESG Vector Signal Generator | Agilent         | E4438C           | MY45094064    | July 1, 2016          | July 1, 2017         |
| Signal Generator            | Agilent         | E4432B           | GB40050998    | July 1, 2016          | July 1, 2017         |
| Semi Anechoic Civil Chamber | ETS             | S81              | SL 11643      | N/A                   | N/A                  |
| Antenna Mast                | ETS             | 2070-2           | -             | N/A                   | N/A                  |
| Turntable                   | ETS             | 2087             | -             | N/A                   | N/A                  |
| Mast & Table Controller     | ETS/EMCO        | 2090             | 9608-1456     | N/A                   | N/A                  |

**Figure 64 Intermodulation Radiated Results**

## 11. Out-of-Band Rejection (LTE)

## 11.1 *Test Specification*

KDB 935210 D05 v01r01, Section 3.3

## 11.2 *Test Procedure*

(Temperature (21°C)/ Humidity (35% RH))

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator and an appropriate coaxial cable (max Loss= 31.0 dB).

The signal and spectrum analyzer frequency range was set to  $\pm 250\%$  of the passband, Dwell time set to approximately 10msec.


RBW was set between 1% to 5% of the E.U.T passband and VBW set to  $\geq 3 \times \text{RBW}$ .

### 11.3 Test Limit

N/A

## 11.4 *Test Results*

JUDGEMENT: Passed

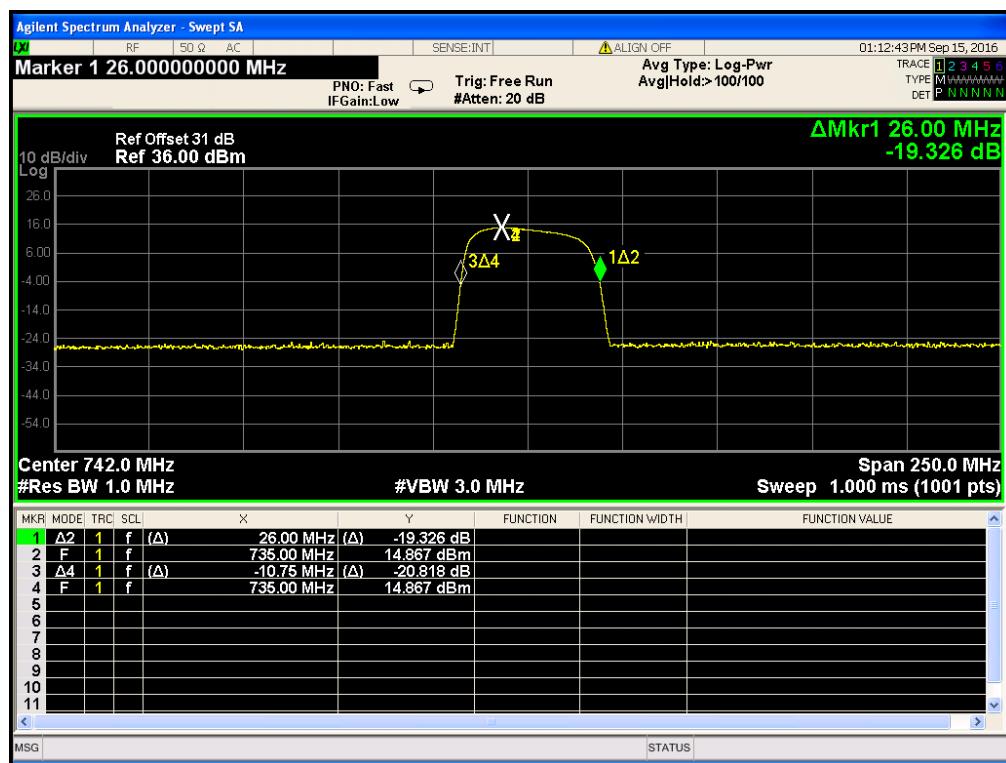

**Figure 65. — Out-of-Band Rejection Plot**



### 11.5 **Test Equipment Used; Out-of-Band Rejection**

| Instrument                  | Manufacturer | Model    | Serial Number | Calibration           |                       |
|-----------------------------|--------------|----------|---------------|-----------------------|-----------------------|
|                             |              |          |               | Last Calibration Date | Next Calibration Date |
| EXA Spectrum Analyzer       | Agilent      | N9010A   | MY48030391    | March 16, 2016        | March 16, 2018        |
| EXG Vector Signal Generator | Agilent      | N5172B   | MY49060440    | November 19, 2014     | November 19, 2017     |
| 30 dB Attenuator            | MCL          | BW-S30W5 | 533           | July 5, 2016          | July 5, 2017          |

**Figure 66 Test Equipment Used**

12.

## APPENDIX A - CORRECTION FACTORS

## 12.1 Correction factors for

## ***RF OATS Cable 35m***

*ITL #1784*

| Frequency ( MHz) | Cable loss (dB) |
|------------------|-----------------|
| 10.0             | 0.3             |
| 20.0             | 0.2             |
| 50.0             | -0.1            |
| 100.0            | -0.6            |
| 200.0            | -1.2            |
| 500.0            | -2.3            |
| 1000.0           | -3.6            |



**12.2 Correction factors for RF OATS Cable 10m**  
**ITL #1794**

| Frequency(MHz) | Cable loss(dB) |
|----------------|----------------|
| 10.0           | -0.3           |
| 20.0           | -0.3           |
| 50.0           | -0.5           |
| 100.0          | -0.7           |
| 200.0          | -1.1           |
| 500.0          | -1.8           |
| 1000.0         | -2.7           |



### 12.3 Correction factors for

**Horn Antenna**  
**Model: SWH-28**  
**at 1 meter range.**

| FREQUENCY<br>(GHz) | AFE<br>(dB /m) | Gain<br>(dB1) |
|--------------------|----------------|---------------|
| 18.0               | 40.3           | 16.1          |
| 19.0               | 40.3           | 16.3          |
| 20.0               | 40.3           | 16.1          |
| 21.0               | 40.3           | 16.3          |
| 22.0               | 40.4           | 16.8          |
| 23.0               | 40.5           | 16.4          |
| 24.0               | 40.5           | 16.6          |
| 25.0               | 40.5           | 16.7          |
| 26.0               | 40.6           | 16.4          |



## 12.4 Correction factors for

**Horn ANTENNA**

**Model: 3115**

**Antenna serial number: 29845**

**3 meter range**

| f(GHz) | AF(dB/m) | GA(dB) |
|--------|----------|--------|
| 0.75   | 25       | 3      |
| 1G     | 23.5     | 7      |
| 1.5G   | 26       | 8      |
| 2G     | 29       | 7      |
| 2.5G   | 27.5     | 10     |
| 3G     | 30       | 10     |
| 3.5G   | 31.5     | 10     |
| 4G     | 32.5     | 9.5    |
| 4.5G   | 32.5     | 10.5   |
| 5G     | 33       | 10.5   |
| 5.5G   | 35       | 10.5   |
| 6G     | 36.5     | 9.5    |
| 6.5G   | 36.5     | 10     |
| 7G     | 37.5     | 10     |
| 7.5G   | 37.5     | 10     |
| 8G     | 37.5     | 11     |
| 8.5G   | 38       | 11     |
| 9G     | 37.5     | 11.5   |
| 9.5G   | 38       | 11.5   |
| 10G    | 38.5     | 11.5   |
| 10.5G  | 38.5     | 12     |
| 11G    | 38.5     | 12.5   |
| 11.5G  | 38.5     | 13     |
| 12G    | 38       | 13.5   |
| 12.5G  | 38.5     | 13     |
| 13G    | 40       | 12     |
| 13.5G  | 41       | 12     |
| 14G    | 40       | 13     |
| 14.5G  | 39       | 14     |
| 15G    | 38       | 15.5   |
| 15.5G  | 37.5     | 16     |
| 16G    | 37.5     | 16     |
| 16.5G  | 39       | 15     |
| 17G    | 40       | 15     |
| 17.5G  | 42       | 13.5   |
| 18G    | 42.5     | 13     |



## 12.5 Correction factors for

### Log Periodic Antenna EMCO, Model 3146, Serial #9505-4081

| Frequency [MHz] | AF [dB/m] |
|-----------------|-----------|
| 200.0           | 11.47     |
| 250.0           | 12.06     |
| 300.0           | 14.77     |
| 400.0           | 15.77     |
| 500.0           | 18.01     |
| 600.0           | 18.84     |
| 700.0           | 20.93     |
| 800.0           | 21.27     |
| 900.0           | 22.44     |
| 1000.0          | 24.10     |



## 12.6 Correction factors for

### *Biconical Antenna*

*EMCO, Model 3110B,  
Serial #9912-3337*

| Frequency [MHz] | AF<br>[dB/m] |
|-----------------|--------------|
| 30.0            | 14.18        |
| 35.0            | 13.95        |
| 40.0            | 12.84        |
| 45.0            | 11.23        |
| 50.0            | 11.10        |
| 60.0            | 10.39        |
| 70.0            | 9.34         |
| 80.0            | 9.02         |
| 90.0            | 9.31         |
| 100.0           | 8.95         |
| 120.0           | 11.53        |
| 140.0           | 12.20        |
| 160.0           | 12.56        |
| 180.0           | 13.49        |
| 200.0           | 15.27        |



**12.7 Correction factors for ACTIVE LOOP ANTENNA**

**Model 6502  
S/N 9506-2950**

| f(MHz) | MAF(dBs/m) | AF(dB/m) |
|--------|------------|----------|
| 0.01   | -33.1      | 18.4     |
| 0.02   | -37.2      | 14.3     |
| 0.03   | -38.2      | 13.3     |
| 0.05   | -39.8      | 11.7     |
| 0.1    | -40.1      | 11.4     |
| 0.2    | -40.3      | 11.2     |
| 0.3    | -40.3      | 11.2     |
| 0.5    | -40.3      | 11.2     |
| 0.7    | -40.3      | 11.2     |
| 1      | -40.1      | 11.4     |
| 2      | -40        | 11.5     |
| 3      | -40        | 11.5     |
| 4      | -40.1      | 11.4     |
| 5      | -40.2      | 11.3     |
| 6      | -40.4      | 11.1     |
| 7      | -40.4      | 11.1     |
| 8      | -40.4      | 11.1     |
| 9      | -40.5      | 11       |
| 10     | -40.5      | 11       |
| 20     | -41.5      | 10       |
| 30     | -43.5      | 8        |