

DATE: 05 February 2008

I.T.L. (PRODUCT TESTING) LTD.
FCC EMC/Radio Test Report
for
MobileAccess Networks

Equipment under test:


**WLAN Module With WCE (WiFi Coverage Extender) for
DAS With 4 Cisco 1242 Access Points**

860M With WCE*

* See customer's declaration on page 7.

Written by: 
D. Shidlow, Documentation

Approved by: 
E. Pitt, Test Engineer

Approved by: 
I. Raz, EMC Laboratory Manager

This report must not be reproduced, except in full, without the written
permission of I.T.L. (Product Testing) Ltd.
This report relates only to items tested.



Measurement/Technical Report for
MobileAccess Networks
WLAN Module With WCE (WiFi Coverage
Extender) for DAS With 4 Cisco 1242 Access Points

860M With WCE
FCC ID: OJFMA860WCE
05 February 2008

This report concerns: Original Grant x Class II change

Class B verification Class A verification Class I change

Equipment type: Direct Sequence Spread Spectrum Transmitter

Request Issue of Grant:

 x Immediately upon completion of review

Limits used:

CISPR 22

Part 15 x

Measurement procedure used is ANSI C63.4-2003.

Application for Certification

prepared by:

Ishaishou Raz

ITL (Product Testing) Ltd.

Kfar Bin Nun

D.N. Shimshon 99780

Israel

e-mail Sraz@itl.co.il

Applicant for this device:

(different from "prepared by")

Steve Blum

Mobile Access Networks

8391 Old Courthouse Rd., Suite #300

Vienna, VA. 22182

U.S.A.

Tel: +1-541-758-2880

Fax: +1-703-848-0260

e-mail: sblum@mobileaccess.com

TABLE OF CONTENTS

1.	GENERAL INFORMATION-----	6
1.1	Administrative Information.....	6
1.2	List of Accreditations	8
1.3	Product Description	9
1.4	Test Methodology	9
1.5	Test Facility	9
1.6	Measurement Uncertainty	9
2.	SYSTEM TEST CONFIGURATION-----	10
2.1	Justification.....	10
2.2	EUT Exercise Software	10
2.3	Special Accessories	10
2.4	Equipment Modifications	10
2.5	Configuration of Tested System.....	11
3.	THEORY OF OPERATION -----	12
3.1	Theory of Operation	12
4.	SPURIOUS RADIATED EMISSION IN THE RESTRICTED BAND, BELOW 1 GHZ	
	5GHZ TRANSMITTER 802.11B/G+802.11A SIGNALS-----	14
4.1	Test Specification	14
4.2	Test Procedure	14
4.3	Test Data	15
4.4	Test Instrumentation Used, Radiated Measurements	20
4.5	Field Strength Calculation	21
5.	SPURIOUS RADIATED EMISSION IN THE RESTRICTED BAND, ABOVE 1 GHZ	
	5GHZ TRANSMITTER 802.11B/G+802.11A SIGNALS-----	22
5.1	Radiated Emission Above 1 GHz.....	22
5.2	Test Data	23
5.3	Test Instrumentation Used, Radiated Measurements Above 1 GHz	30
6.	26 DB BANDWIDTH 5 GHZ TRANSMITTER 802.11B/G+802.11A SIGNALS -----	31
6.1	Test procedure	31
6.2	Test Equipment Used.....	38
7.	MAXIMUM CONDUCTED OUTPUT POWER 5 GHZ TRANSMITTER	
	802.11B/G+802.11A SIGNALS-----	39
7.1	Test procedure	39
7.2	Results table.....	46
7.3	Test Equipment Used.....	47
8.	PEAK POWER SPECTRAL DENSITY 5GHZ TRANSMITTER 802.11B/G+802.11A	
	SIGNALS -----	48
8.1	Test procedure	48
8.2	Results table.....	54
8.3	Test Equipment Used.....	55
9.	RATIO OF PEAK EXCURSION OF MODULATION ENVELOPE TO MAXIMUM	
	CONDUCTED OUTPUT POWER 5GHZ TRANSMITTER 802.11B/G+802.11A	
	SIGNALS -----	56
9.1	Test procedure	56
9.2	Results table.....	62
9.3	Test Equipment Used.....	63
10.	PEAK POWER OUTPUT OUT OF 5150-5250; 5725-5825 MHZ BANDS 5 GHZ	
	TRANSMITTER 802.11B/G+802.11A SIGNALS-----	64
10.1	Test procedure	64
10.2	Results table.....	132
10.3	Test Equipment Used.....	133

11.	BAND EDGE SPECTRUM 5GHZ TRANSMITTER 802.11B/G+802.11A SIGNALS----	134
11.1	Test procedure	134
11.2	Results table.....	140
11.3	Results table.....	141
11.4	Test Equipment Used.....	142
12.	ANTENNA GAIN 5GHZ TRANSMITTER 802.11B/G+802.11A SIGNALS -----	143
13.	R.F EXPOSURE/SAFETY 5GHZ TRANSMITTER 802.11B/G+802.11A SIGNALS ----	144
14.	RADIATED EMISSION PER FCC PART 15 SUB-PART B TEST DATA	
	802.11B/G+802.11A SIGNALS-----	145
14.1	Test Specification	145
14.2	Test Procedure.....	145
14.3	Test Data	146
14.4	Test Instrumentation Used, Radiated Measurements	151
14.5	Field Strength Calculation	152
15.	SPURIOUS RADIATED EMISSION IN THE RESTRICTED BAND, BELOW 1 GHZ	
	5GHZ TRANSMITTER 802.11B/G+802.11A + CELL + PCS SIGNALS -----	153
15.1	Test Specification	153
15.2	Test Procedure.....	153
15.3	Test Data	154
15.4	Test Instrumentation Used, Radiated Measurements	159
15.5	Field Strength Calculation	160
16.	SPURIOUS RADIATED EMISSION IN THE RESTRICTED BAND, ABOVE 1 GHZ	
	5GHZ TRANSMITTER 802.11B/G+802.11A + CELL + PCS SIGNALS -----	161
16.1	Radiated Emission Above 1 GHz.....	161
16.2	Test Data	162
16.3	Test Instrumentation Used, Radiated Measurements Above 1 GHz.....	169
17.	26 DB BANDWIDTH 5 GHZ TRANSMITTER 802.11B/G+802.11A + CELL + PCS	
	SIGNALS -----	170
17.1	Test procedure	170
17.2	Test Equipment Used.....	177
18.	MAXIMUM CONDUCTED OUTPUT POWER 5 GHZ TRANSMITTER	
	802.11B/G+802.11A + CELL + PCS SIGNALS -----	178
18.1	Test procedure	178
18.2	Results table.....	185
18.3	Test Equipment Used.....	186
19.	PEAK POWER SPECTRAL DENSITY 5GHZ TRANSMITTER 802.11B/G+802.11A +	
	CELL + PCS SIGNALS -----	187
19.1	Test procedure	187
19.2	Results table.....	193
19.3	Test Equipment Used.....	194
20.	RATIO OF PEAK EXCURSION OF MODULATION ENVELOPE TO MAXIMUM	
	CONDUCTED OUTPUT POWER 5GHZ TRANSMITTER 802.11B/G+802.11A +	
	CELL + PCS SIGNALS -----	195
20.1	Test procedure	195
20.2	Results table.....	201
20.3	Test Equipment Used.....	202
21.	PEAK POWER OUTPUT OUT OF 5150-5250; 5725-5825 MHZ BANDS 5 GHZ	
	TRANSMITTER 802.11B/G+802.11A + CELL + PCS SIGNALS -----	203
21.1	Test procedure	203
21.2	Results table.....	264
21.3	Test Equipment Used.....	265

22.	BAND EDGE SPECTRUM 5GHZ TRANSMITTER 802.11B/G+802.11A + CELL + PCS SIGNALS -----	266
22.1	Test procedure	266
22.2	Results table.....	271
22.3	Results table.....	272
22.4	Test Equipment Used.....	273
23.	ANTENNA GAIN 5GHZ TRANSMITTER 802.11B/G+802.11A + CELL + PCS SIGNALS -----	274
24.	R.F EXPOSURE/SAFETY 5GHZ TRANSMITTER 802.11B/G+802.11A + CELL + PCS SIGNALS -----	275
25.	RADIATED EMISSION PER FCC PART 15 SUB-PART B TEST DATA 802.11B/G+802.11A + CELL + PCS SIGNALS -----	276
25.1	Test Specification	276
25.2	Test Procedure.....	276
25.3	Test Data	277
25.4	Test Instrumentation Used, Radiated Measurements	282
25.5	Field Strength Calculation	283
26.	INTERMODULATION TESTS-----	284
26.1	Test procedure	284
26.2	Test Equipment Used.....	292
27.	APPENDIX A - CORRECTION FACTORS -----	293
27.1	Correction factors for CABLE.....	293
27.2	Correction factors for CABLE.....	294
27.3	Correction factors for CABLE.....	295
27.4	Correction factors for CABLE.....	296
27.5	Correction factors for LOG PERIODIC ANTENNA	297
27.6	Correction factors for LOG PERIODIC ANTENNA	298
27.7	Correction factors for BICONICAL ANTENNA.....	299
27.8	Correction factors for BICONICAL ANTENNA.....	300
27.9	Correction factors for Double-Ridged Waveguide Horn	301
27.10	Correction factors for Horn Antenna	302
27.11	Correction factors for Horn Antenna	303
27.12	Correction factors for ACTIVE LOOP ANTENNA	304

1. General Information

1.1 Administrative Information

Manufacturer:	MobileAccess Networks
Manufacturer's Address:	8391 Old Courthouse Rd. Suite #300 Vienna, VA 22182 U.S.A. Tel: +1-541-758-2880 Fax: +1-703-848-0260
Manufacturer's Representative:	Steve Blum
Equipment Under Test (E.U.T):	WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Cisco 1242 Access Points
Equipment Model No.:	860M With WCE (See customer's declaration on following page).
Equipment Serial No.:	1. 860M: 73903D 2. WCE: 739038
Date of Receipt of E.U.T:	27.01.08
Start of Test:	27.01.08
End of Test:	04.02.08
Test Laboratory Location:	I.T.L (Product Testing) Ltd. Kfar Bin Nun, ISRAEL 99780
Test Specifications:	See Section 2

15/11/2007

DECLARATION

I HEREBY DECLARE THAT THE FOLLOWING PRODUCT:

860M

IS IDENTICAL ELECTRONICALLY, PHYSICALLY, AND
MECHANICALLY TO:

MA-860

Please relate to them all (from an EMC point of view) as the
same product.

Thank you,

Signature:  _____

Shai Rachamim
Verification Engineer
MobileAccess Networks
Ofek One Center, Bldg.2
Northern Industrial Zone
Lod, Israel 71293

E-mail: ShaiR@MobileAccess.com
Wired: +972-8-9183804
Unwired: +972-52-6994548

1.2 List of Accreditations

The EMC laboratory of I.T.L. is accredited by the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), Registration No. 90715.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-1350, R-1285.
5. Industry Canada (Canada), File No. IC 4025.
6. TUV Product Services, England, ASLLAS No. 97201.
7. Nemko (Norway), Authorization No. ELA 207.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.

1.3 Product Description

The MobileAccess 860 WLAN Solution delivers pervasive WLAN coverage throughout enterprise environments using a unique multi-service wireless architecture. With the MA-860 approach, enterprises can seamlessly translate their WLAN investments and design expertise into a comprehensive, multi-service wireless solution.

The MA-860 combines WLAN services with signals from other wireless sources, including voice and data services from multiple wireless operators, public safety, and building automation applications. It then distributes the combined RF signals over a common set of broadband cables and antennas. One-Click calibration between the MA-860 module and the MobileAccess Wi-Fi Coverage Expander (WCE) ensures optimal coverage by mirroring the coverage footprint and system behavior of “AP-on-Ceiling” deployments for 802.11a and 802.11b/g WLAN services.

This Wire-it-Once™ approach spreads WLAN deployment costs across multiple wireless service needs, providing facility-wide coverage for WLAN and all other wireless services while creating a flexible infrastructure that adapts to evolving technology requirements.

In addition, the MA-860 WLAN solution locates Access Points (APs) in secure telecom closets alongside other LAN internetworking equipment, yielding significant operational benefits:

- Provides physical security of the APs
- Makes APs more accessible to IT staff
- Reduces ongoing operational expenses

1.4 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4: 2003. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.5 Test Facility

The radiated emissions tests were performed at I.T.L.’s testing facility at Kfar Bin-Nun, Israel. This site is a FCC listed test laboratory (FCC Registration No. 90715, date of listing August 22, 2006).

I.T.L.’s EMC Laboratory is also accredited by A2LA, certificate No. 1152.01.

1.6 Measurement Uncertainty

Radiated Emission

The Open Site complies with the ± 4 dB Normalized Site Attenuation requirements of ANSI C63.4-2003. In accordance with Paragraph 5.4.6.1 of this standard, this tolerance includes instrumentation calibration errors, measurement technique errors, and errors due to site anomalies.

2. System Test Configuration

2.1 Justification

The EUT consists of the 860M, WCE and an access point. The system combines 802.11 signals with the cellular signals. The cellular signals are represented in the setup by the CELL and PCS portion of the setup, which were connected to the EUT through MobileAccess standard infrastructure (i.e. RIU, BU, RHU and a controller) to represent a normal installation of the EUT. CELL and PCS portions were used for intermodulation tests only.

An "Exercise" SW on the laptops was used to trigger the access points to transmit continuously, while the EUT output was connected to the spectrum analyzer.

2.2 EUT Exercise Software

The Access Point (AP) (as part of the EUT) was triggered to transmit using an "Exercise SW".

The program "Air Magnet" was used to trigger the AP to continuously transmit packets.

2.3 Special Accessories

No special accessories were needed to achieve compliance.

2.4 Equipment Modifications

No modifications were necessary in order to achieve compliance.

2.5 Configuration of Tested System

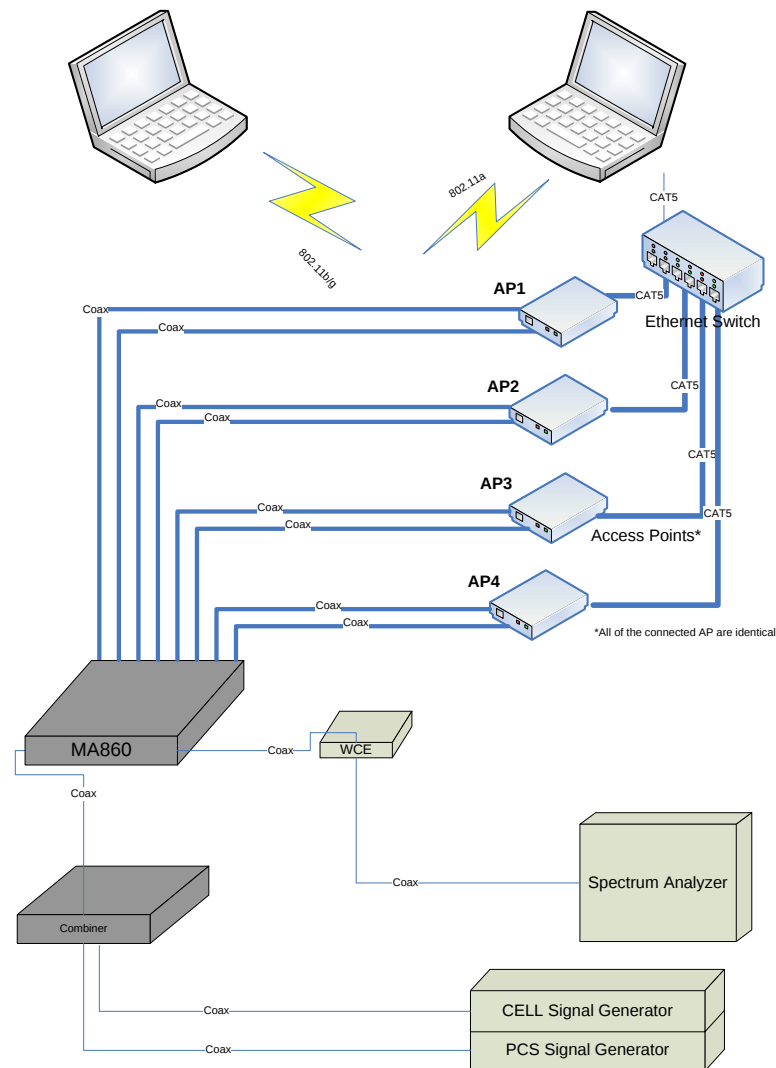


Figure 1. Configuration of Tested System

Note: The system was tested using four identical Cisco Access Points M/N 1242, S/N FTX1108B616, S/N FTX11013B13Q, S/N FTX1108B60Z, S/N FTX1108B605, FCC ID: LDK102056.

3. Theory of Operation

3.1 Theory of Operation



Making Wireless an Indoor State of Mind

► MA-860 WLAN Solution


MobileAccess 860 WLAN Module

MA-860 Solution Overview

The MobileAccess 860 WLAN Solution delivers pervasive WLAN coverage throughout enterprise environments using a unique multi-service wireless architecture. With the MA-860 approach, enterprises can seamlessly translate their WLAN investments and design expertise into a comprehensive, multi-service wireless solution.

The MA-860 combines WLAN services with signals from other wireless sources, including voice and data services from multiple wireless operators, public safety, and building automation applications. It then distributes the combined RF signals over a common set of broadband cables and antennas. One-Click calibration between the MA-860 module and the MobileAccess Wi-Fi Coverage Expander (WCE) ensures optimal coverage by mirroring the coverage footprint and system behavior of "AP-on-Ceiling" deployments for 802.11a and 802.11b/g WLAN services.

This Wire-it-Once™ approach spreads WLAN deployment costs across multiple wireless service needs, providing facility-wide coverage for WLAN and all other wireless services while creating a flexible infrastructure that adapts to evolving technology requirements.

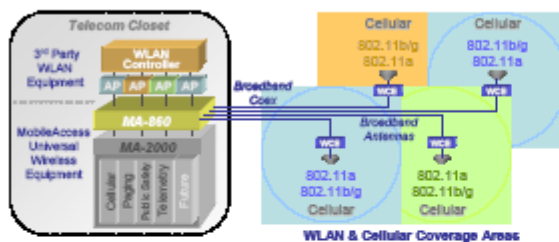

In addition, the MA-860 WLAN solution locates Access Points (APs) in secure telecom closets alongside other LAN internetworking equipment, yielding significant operational benefits:

- Provides physical security of the APs
- Makes APs more accessible to IT staff
- Reduces ongoing operational expenses



Benefits

Cost-Effective Multi-Service Solution

- Delivers WLAN and other wireless RF signals over a single multi-service infrastructure
- Spreads WLAN deployment costs across multiple wireless services

Dependable WLAN Coverage

- MobileAccess WLAN architecture mirrors the behaviors and coverage footprint of "AP-on-Ceiling" deployment
- One-Click compensation ensures optimal 802.11b/g and 802.11a coverage
- Dedicated AP to antenna relationships ensure transparent support for WLAN applications such as VOIP and location services (RTLS)
- Redundant power option

Centralized & Secure AP Management

- Lowers operating expenses
- Provides physical security and simplifies management

Proactive End-to-End Monitoring

- Remote SNMP monitoring for status, alerting, and fault detection
- Monitoring extends to attached multi-service antennas

Simplified IT Deployment Model

- Uses standard WLAN design techniques



8391 Old Courthouse Road, Suite 300, Vienna, VA 22182

Tel: (866) 438-9288, (703) 848-0200 TAC: (800) 787-1266 Fax: (703) 848-0280

www.mobileaccess.com

MA-860 Product Specifications

802.11 RF Parameters Power

860(M/R) with Wi-Fi Coverage Expander (WCE):

	802.11a	802.11b/g
Gain TX (dB)	0	0
Output Power (dBm)	17	b: 20 g: 17
Gain RX (dB)	4	4
NF RX (dB)	5	5
Flatness (dB)	+/- 2.0	+/- 1.5

860(M/R) Module Standalone:

	802.11a	802.11b/g
Insertion Loss (dB)	3	2
Flatness (dB)	+/- 1.0	+/- 1.0

Mobile Services Parameters

	Cell		PCS
Band (MHz)	698-960		1710-1990
Insertion Loss (dB)			
MA-860	1.0		2.5
WCE	1.2		3.5
System	2.2		6.0

RF Connections

860(M/R)

802.11 b/g	(4) SMA Female, 50 ohm
802.11 a	(4) SMA Female, 50 ohm
Mobile Services	(4) SMA Female, 50 ohm
Antenna Ports	(4) N-type Female, 50 ohm

WCE

Coax (860 facing)	(1) N-type Male
Coax (Ant facing)	(1) N-type Female

Standards and Approvals

FCC-47, CFR 15.109, Part 15 Sections B, C, and E
UL / IEC 60950 -1
UL1950 Fire Safety requirements
UL2043 Fire/Plenum (WCE)
CE EN 60950
CAN/CSA C22.2 No 60950

Management

The 860(M/R) can be configured and monitored through either a local RS-485 connection or a Web browser application via an RJ-45 Ethernet connection

Power

2 DC Power Inputs
DC-1 = 28V Mandatory DC Power, 86 Watts
DC-2= 9.8V Optional Redundant Power, 40 Watts

Physical Specifications

Dimensions	860(M/R): 242 mm x 279 mm x 38 mm (9.54 in x 10.98 in x 1.5 in) WCE: 130 mm x 120 mm x 20 mm (5.12 in x 4.73in x 0.8 in)
------------	---

Weight	860(M/R): 2.82 kg (6.2 lb) WCE: 0.80 kg (1.8 lb)
--------	---

Environmental Specifications

Temperature	
Operating	0°C to +50°C (32°F to 122°F)
Storage	-20°C to +85°C (-4°C to 185°C)
Humidity	
Operating	95% (non-condensing)
Storage	95% (non-condensing)


Ordering Information

860M	860 WLAN Module
860R	860 WLAN Module
	- Redundant Power Supply Option
WCE	Wi-Fi Coverage Expander

Accessory Kits for mounting 860(M/R):

AK-860-1000	860 with MA-1000
AK-860-1200	860 with MA-1200
AK-860-MDLT	860 with ModuLite
AK-860-2000	860 with MA-2000
AK-860-SA	860 stand alone
AK-860-2000L	860 with MA-2000 Lite
AK-860-PWR	Redundant Power Supply

Wiring Diagram

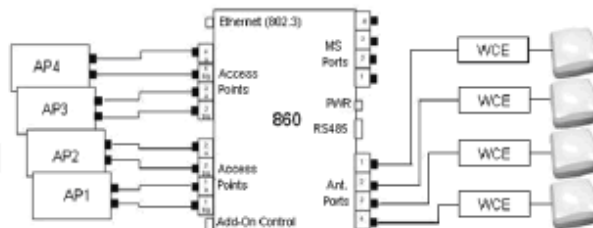

8391 Old Courthouse Road, Suite 300, Vienna, VA 22182
Tel: (866)436-9286, (703) 848-0200 TAC: (800) 787-1288 Fax: (703) 848-0280
www.mobileaccess.com

4. Spurious Radiated Emission in the Restricted Band, Below 1 GHz 5GHz Transmitter 802.11b/g+802.11a Signals

4.1 Test Specification

9kHz-1000 MHz, F.C.C., Part 15, Subpart C

4.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3.

See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 3.1.

The frequency range 9 kHz-1000 MHz was scanned, and the list of the highest emissions was verified and updated accordingly.

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 9 kHz-30 MHz, the loop antenna was rotated on its vertical axis, The antenna height (center of loop) was 1 meter.

In the frequency range 30-1000 MHz, the readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

Verification of the E.U.T emissions was based on the following methods:

- Turning the E.U.T on and off.

- Using a frequency span less than 10 MHz.

- Observation of the signal level during turntable rotation. Background noise is not affected by the rotation of the E.U.T.

The E.U.T. was tested at the operating frequencies of, 5180, 5200, 5240, 5745, 5765, and 5805 MHz using the following modulations: 64QAM, and BPSK.

4.3 Test Data

JUDGEMENT: Passed by 3.5 dB.

The margin between the emission level and the specification limit is 3.5 dB in the worst case at the frequency of 39.70 MHz, vertical polarization.

The EUT met the requirements of the F.C.C. Part 15, Subpart C, specification.

The results for all operating frequencies and modulations were the same.

TEST PERSONNEL:

Tester Signature: _____

Date: 05.02.08

Typed/Printed Name: A. Sharabi

Radiated Emission

E.U.T Description WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Cisco 1242 Access Points

Type 860M With WCE

Serial Number: 1. 860M: 73903D
2. WCE: 739038

Specification: FCC Part 15, Subpart C

Antenna Polarization: Horizontal Frequency range: 30 MHz to 300 MHz
Antenna: 3 meters distance Detectors: Peak, Quasi-peak

Frequency	Peak Amp	QP Amp	Correction	Specification	Margin
(MHz)	(dB μ V/m)	(dB μ V/m)	(dB)	(dB μ V/m)	(dB)
39.70	31.7	27.3	13.4	40.0	-12.7
46.92	28.4	23.5	12.1	40.0	-16.5
162.58	36.0	31.7	15.4	43.5	-11.8
175.07	40.8	35.8	15.9	43.5	-7.7
207.20	37.1	32.2	18.0	43.5	-11.3
242.11	40.6	36.0	20.0	46.0	-10.0

**Figure 2. Radiated Emission. Antenna Polarization: HORIZONTAL.
Detectors: Peak, Quasi-peak**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Radiated Emission

E.U.T Description WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Cisco 1242 Access Points

Type 860M With WCE


Serial Number: 1. 860M: 73903D
2. WCE: 739038

Specification: FCC Part 15, Subpart C

Antenna Polarization: Horizontal
Antenna: 3 meters distance

Frequency range: 30 MHz to 300 MHz
Detectors: Peak, Quasi-peak

 13:48:32 FEB 04, 2008

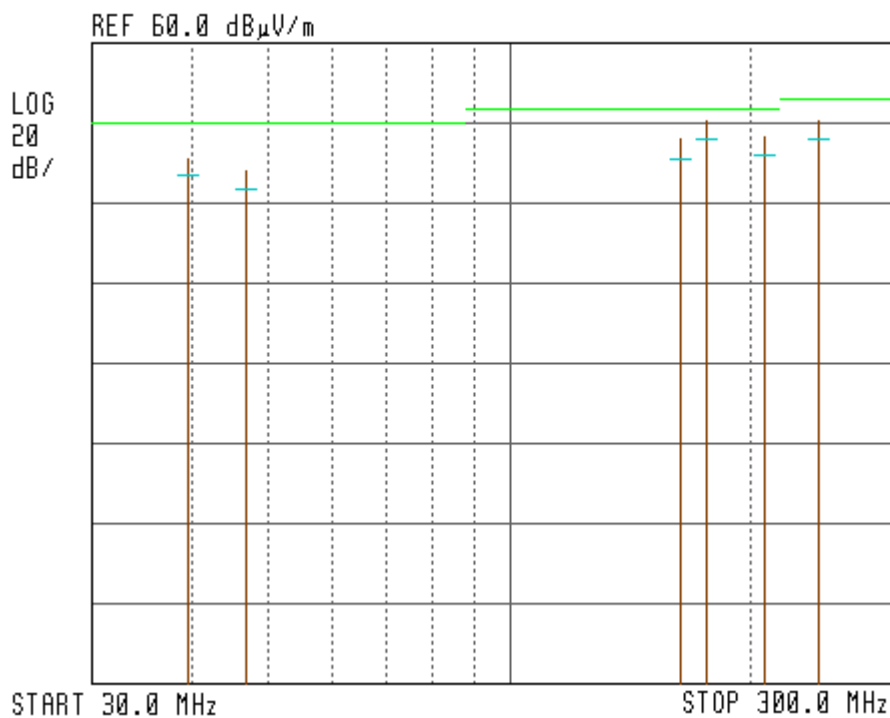

**Figure 3. Radiated Emission. Antenna Polarization: HORIZONTAL
Detectors: Peak, Quasi-peak**

Note:

1. Horizontal axis shows logarithmic frequency scale.
2. The vertical axis shows amplitude (in dB μ V/m).
3. Peak detection is designated by the top of each vertical line.
4. Quasi-peak detection is designated by the first dash mark (from the top) of each vertical line.

Radiated Emission

E.U.T Description WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Cisco 1242 Access Points

Type 860M With WCE

Serial Number: 1. 860M: 73903D
2. WCE: 739038

Specification: FCC Part 15, Subpart C

Antenna Polarization: Vertical
Antenna: 3 meters distance

Frequency range: 30 MHz to 300 MHz
Detectors: Peak, Quasi-peak

Frequency	Peak Amp	QP Amp	Correction	Specification	Margin
(MHz)	(dB μ V/m)	(dB μ V/m)	(dB)	(dB μ V/m)	(dB)
34.93	36.0	32.1	14.7	40.0	-7.9
39.70	41.6	36.5	13.4	40.0	-3.5
46.15	44.4	34.8	12.2	40.0	-5.2
162.58	41.6	38.8	15.4	43.5	-4.7
175.07	40.9	37.6	15.9	43.5	-5.9
242.11	38.6	34.7	20.0	46.0	-11.3

**Figure 4. Radiated Emission. Antenna Polarization: VERTICAL.
Detectors: Peak, Quasi-peak**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Radiated Emission

E.U.T Description WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Cisco 1242 Access Points

Type 860M With WCE


Serial Number: 1. 860M: 73903D
2. WCE: 739038

Specification: FCC Part 15, Subpart C

Antenna Polarization: Vertical
Antenna: 3 meters distance

Frequency range: 30 MHz to 300 MHz
Detectors: Peak, Quasi-peak

12:34:02 FEB 04, 2008

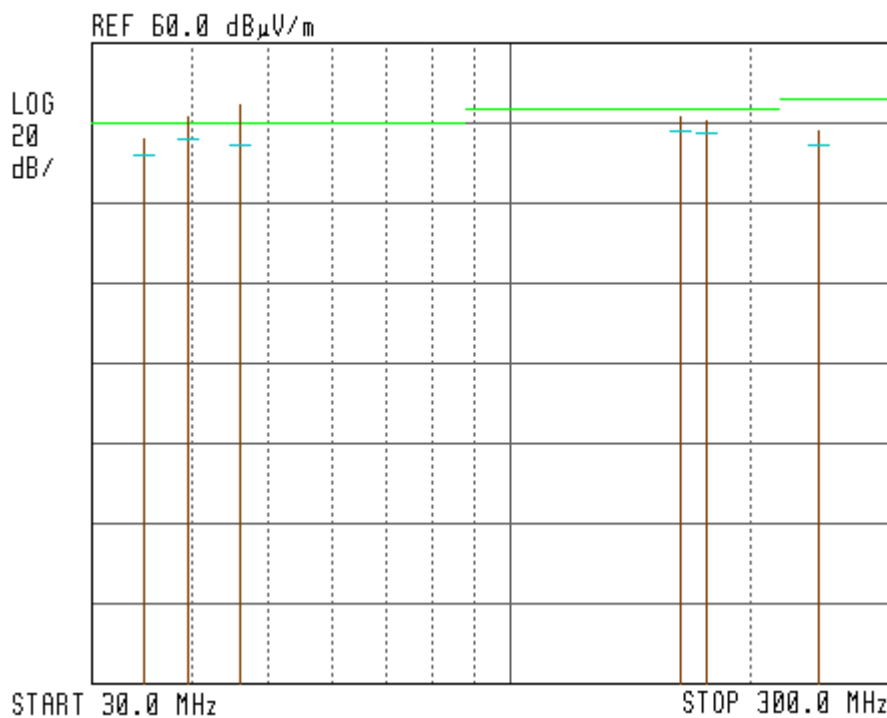

**Figure 5. Radiated Emission. Antenna Polarization: VERTICAL.
Detectors: Peak, Quasi-peak**

Note:

1. Horizontal axis shows logarithmic frequency scale.
2. The vertical axis shows amplitude (in dB μ V/m).
3. Peak detection is designated by the top of each vertical line.
4. Quasi-peak detection is designated by the first dash mark (from the top) of each vertical line.

4.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3411A00102	November 12, 2007	1 year
RF Section	HP	85420E	3427A00103	November 12, 2007	1 year
Antenna Bioconical	ARA	BCD 235/B	1041	March 22, 2007	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	November 22, 2007	1 year
Active Loop Antenna	EMCO	6502	9506-2950	October 15, 2007	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

4.5 Field Strength Calculation

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$[\text{dB}\mu\text{v/m}] \text{ FS} = \text{RA} + \text{AF} + \text{CF}$$

FS:	Field Strength [dB μ v/m]
RA:	Receiver Amplitude [dB μ v]
AF:	Receiving Antenna Correction Factor [dB/m]
CF:	Cable Attenuation Factor [dB]

No external pre-amplifiers are used.

5. Spurious Radiated Emission in the Restricted Band, Above 1 GHz 5GHz Transmitter 802.11b/g+802.11a Signals

5.1 Radiated Emission Above 1 GHz

The E.U.T operation mode and test set-up are as described in Section 3.

See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 3.1.

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.

In the frequency range 1-2.9 GHz, a computerized EMI receiver complying to CISPR 16 requirements was used.

In the frequency range 2.9-40.0 GHz, a spectrum analyzer including a low noise amplifier was used. During average measurements, the IF bandwidth was 1 MHz and the video bandwidth was 100Hz. During peak measurements, the IF bandwidth was 1 MHz and the video bandwidth was 3 MHz.

The test distance was 3 meters.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

Verification of the E.U.T emissions was based on the following methods: turning the E.U.T on and off; using a frequency span less than 10 MHz; observation of the signal level during turntable rotation. (Background noise is not affected by the rotation of the E.U.T.)

The E.U.T. was tested at the operating frequencies of, 5180, 5200, 5240, 5745, 5765, and 5805 MHz using the following modulations: 64QAM, and BPSK.

5.2 Test Data

JUDGEMENT: Passed by 1.3 dB

For the operating frequencies of 5180, 5200, and 5240, the signals in the frequency range of 1.0 – 40.0 GHz were more than 20 dB below the specification limit.

For the operation frequency of 5745 MHz, the margin between the emission level and the specification limit is 2.9 dB in the worst case at the frequency of 11490.00 MHz, vertical polarization.

For the operation frequency of 5765 MHz, the margin between the emission level and the specification limit is 1.5 dB in the worst case at the frequency of 11530.00 MHz, vertical polarization.

For the operation frequency of 5805 MHz, the margin between the emission level and the specification limit is 1.3 dB in the worst case at the frequency of 11610.00 MHz, vertical polarization.

The results for all modulations were the same.

The EUT met the requirements of the F.C.C. Part 15, Subpart C, specification.

TEST PERSONNEL:

Tester Signature: 

Date: 05.02.08

Typed/Printed Name: A. Sharabi

Radiated Emission Above 1 GHz

E.U.T Description WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Cisco 1242 Access Points

Type 860M With WCE

Serial Number: 1. 860M: 73903D
2. WCE: 739038

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 40.0 GHz

Test Distance: 3 meters Detector: Peak

Operation Frequency: 5745 MHz

Freq.	Polarity	Peak Amp	Peak. Specification	Peak. Margin
(MHz)	(H/V)	(dB μ V/m)	(dB μ V/m)	(dB)
11490.00	H	58.7*	74.0	-15.3
11490.00	V	60.9*	74.0	-13.1

Figure 6. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL. Detector: Peak

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Amp” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

Radiated Emission Above 1 GHz

E.U.T Description WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Cisco 1242 Access Points

Type 860M With WCE

Serial Number: 1. 860M: 73903D
2. WCE: 739038

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 40.0 GHz

Test Distance: 3 meters Detector: Average

Operation Frequency: 5745 MHz

Freq.	Polarity	Average Amp	Average Specification	Peak. Margin
(MHz)	(H/V)	(dBμV/m)	(dB μV/m)	(dB)
11490.00	H	48.4*	54.0	-5.6
11490.00	V	51.1*	54.0	-2.9

Figure 7. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL. Detector: Average

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Amp” includes correction factor.

* Correction Factor = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

Radiated Emission Above 1 GHz

E.U.T Description WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Cisco 1242 Access Points

Type 860M With WCE

Serial Number: 1. 860M: 73903D
2. WCE: 739038

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 40.0 GHz

Test Distance: 3 meters Detector: Peak

Operation Frequency: 5765 MHz

Freq.	Polarity	Peak Amp	Peak. Specification	Peak. Margin
(MHz)	(H/V)	(dB μ V/m)	(dB μ V/m)	(dB)
11530.00	H	58.5*	74.0	-15.5
11530.00	V	66.2*	74.0	-7.8

Figure 8. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL. Detector: Peak

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Amp” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

Radiated Emission Above 1 GHz

E.U.T Description	WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Cisco 1242 Access Points
Type	860M With WCE
Serial Number:	1. 860M: 73903D 2. WCE: 739038

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 40.0 GHz
Test Distance: 3 meters Detector: Average
Operation Frequency: 5765 MHz

Freq.	Polarity	Average Amp	Average Specification	Peak. Margin
(MHz)	(H/V)	(dBμV/m)	(dB μV/m)	(dB)
11530.00	H	49.3*	54.0	-4.7
11530.00	V	52.5*	54.0	-1.5

Figure 9. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL. Detector: Average

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Amp” includes correction factor.

* Correction Factor = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

Radiated Emission Above 1 GHz

E.U.T Description WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Cisco 1242 Access Points

Type 860M With WCE

Serial Number: 1. 860M: 73903D
2. WCE: 739038

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 40.0 GHz

Test Distance: 3 meters Detector: Peak

Operation Frequency: 5805 MHz

Freq.	Polarity	Peak Amp	Peak. Specification	Peak. Margin
(MHz)	(H/V)	(dBμV/m)	(dB μV/m)	(dB)
11610.00	H	58.8*	74.0	-15.2
11610.00	V	68.5*	74.0	-6.5

Figure 10. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL. Detector: Peak

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Amp” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

Radiated Emission Above 1 GHz

E.U.T Description WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Cisco 1242 Access Points

Type 860M With WCE

Serial Number: 1. 860M: 73903D
2. WCE: 739038

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 40.0 GHz

Test Distance: 3 meters Detector: Average

Operation Frequency: 5805 MHz

Freq.	Polarity	Average Amp	Average Specification	Peak. Margin
(MHz)	(H/V)	(dB μ V/m)	(dB μ V/m)	(dB)
11610.00	H	49.5*	54.0	-4.5
11610.00	V	52.7*	54.0	-1.3

Figure 11. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL. Detector: Average

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Amp” includes correction factor.

* Correction Factor = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

5.3 Test Instrumentation Used, Radiated Measurements Above 1 GHz

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
Receiver	HP	85422E	3411A00102	November 12, 2007	1 year
RF Section	HP	85420E	3427A00103	November 12, 2007	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A
Antenna-Log Periodic	A.H.System	SAS-200/511	253	February 4, 2007	2 years
Double Ridged Waveguide Horn Antenna	EMCO	3115	29845	March 15, 2006	2 years
Horn Antenna	ARA	SWH-28	1008	December 8, 2006	2 year
Horn Antenna	Narda	V637	0410	December 8, 2006	2 year
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS-0411N313	013	November 2, 2007	1 year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	February 8, 2007	1 year
Low Noise Amplifier	MK Milliwave	MKT6-3000 400-30-13P	399	February 8, 2007	1 year
Spectrum Analyzer	HP	8592L	3826A01204	February 22, 2007	1 year
Spectrum Analyzer	HP	8546E	3442A00275	November 14, 2007	1 year
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

6. 26 dB Bandwidth 5 GHz Transmitter 802.11b/g+802.11a Signals

6.1 Test procedure

The E.U.T. was set to the applicable test frequency. The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator (20 dB) and appropriate coaxial cable (cable loss = 1 dB). The spectrum analyzer was set to 300 kHz resolution BW. The spectrum bandwidth of the E.U.T. was measured and recorded.

The E.U.T. was tested at 5180, 5200, 5240, 5745, 5765, and 5805 MHz with the following modulations: 64QAM (54Mbit/sec) and BPSK (6Mbit/sec).

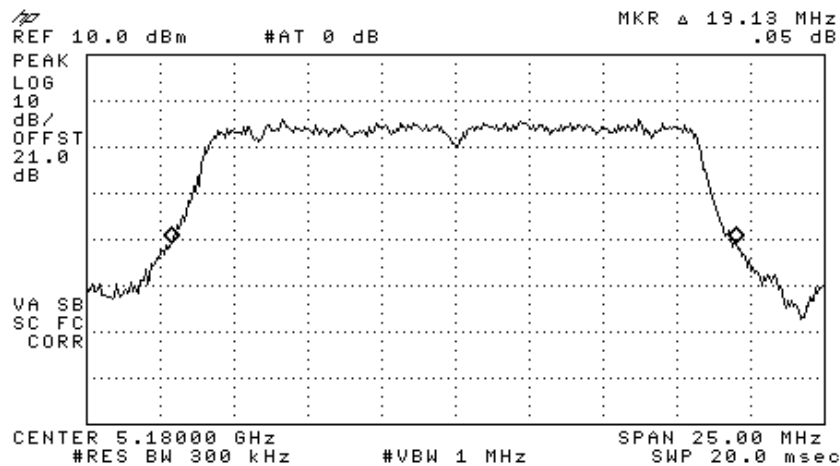


Figure 12 —5180 MHz 64QAM

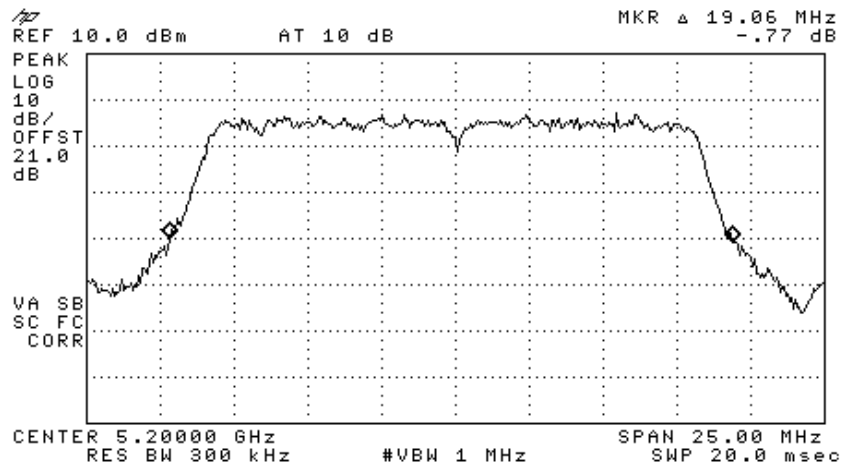


Figure 13 —5200 MHZ 64QAM

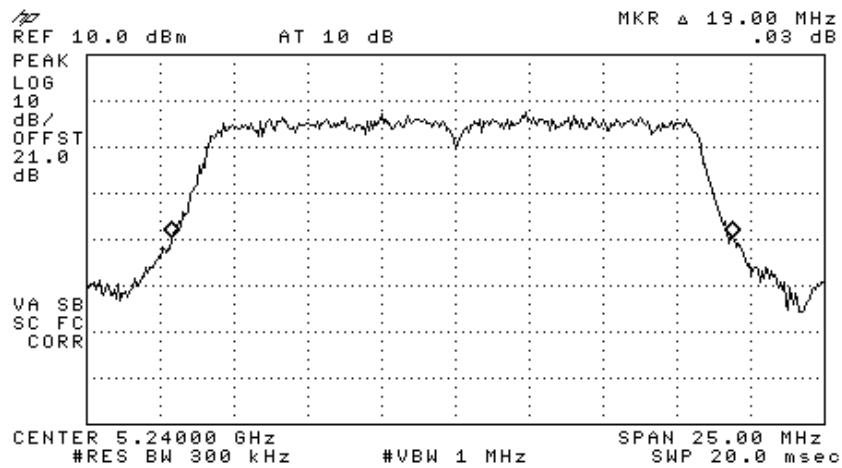


Figure 14 —5240 MHZ 64QAM

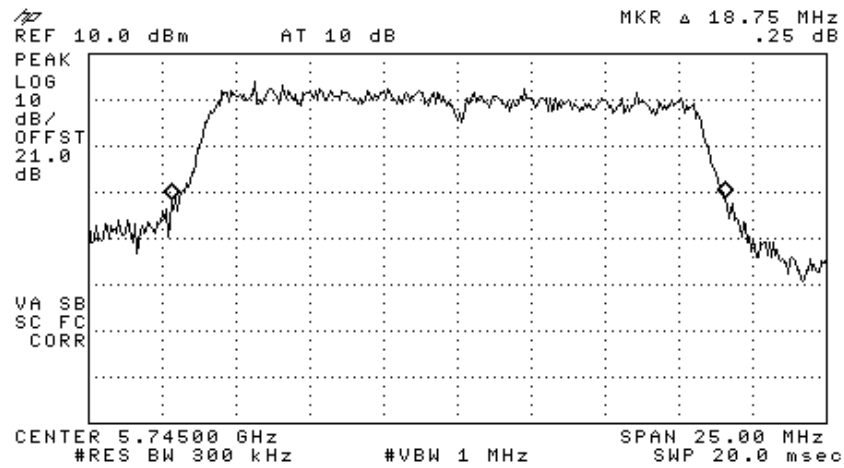


Figure 15 —5745 MHz 64QAM

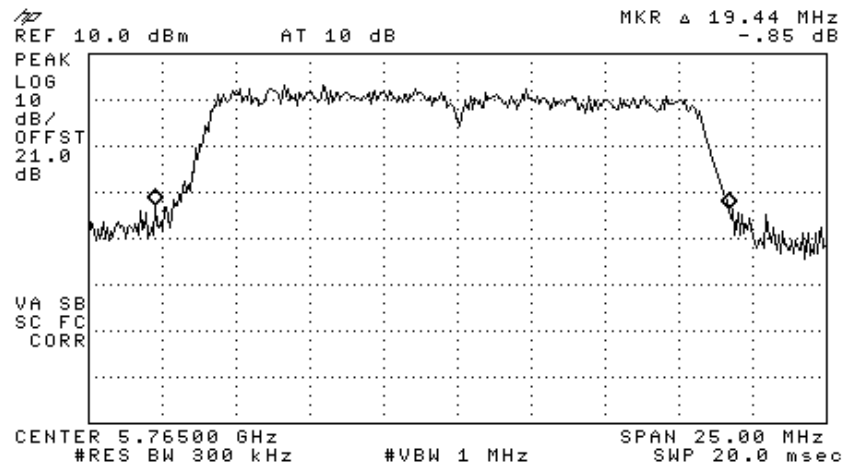


Figure 16 —5765 MHz 64QAM

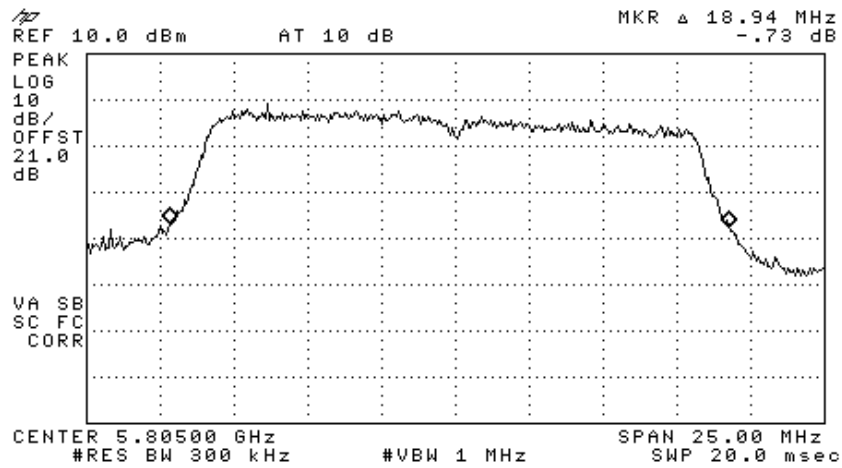


Figure 17 —5805 MHz 64QAM

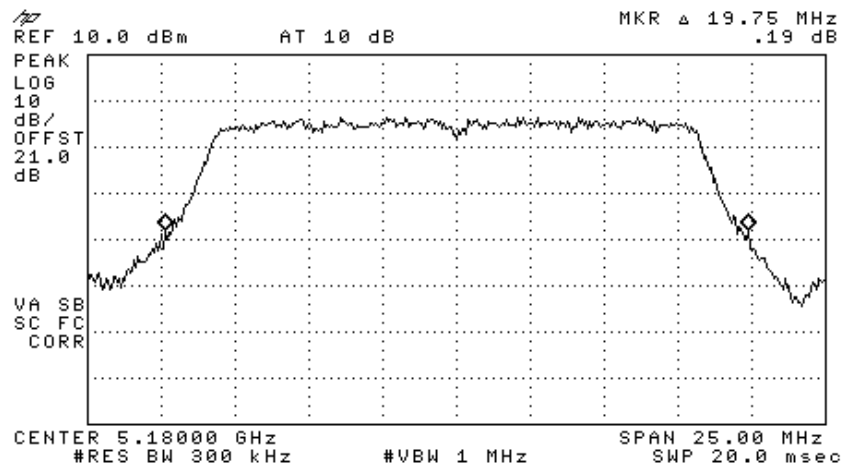


Figure 18 —5180 MHz BPSK

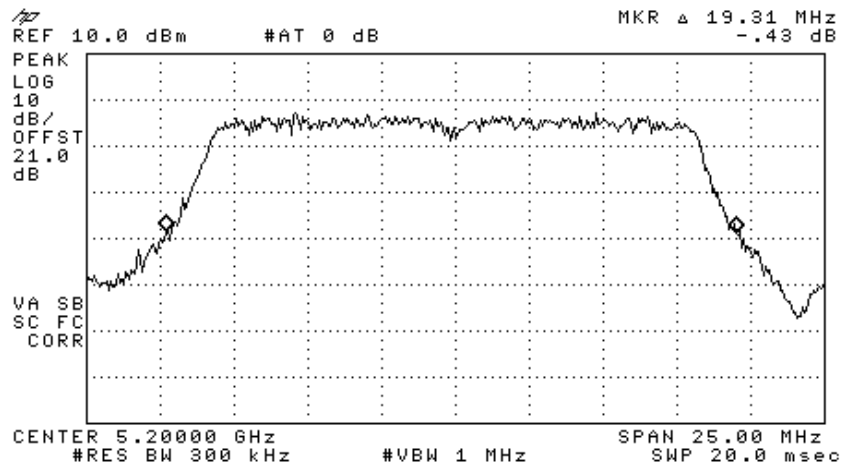


Figure 19 —5200 MHz BPSK

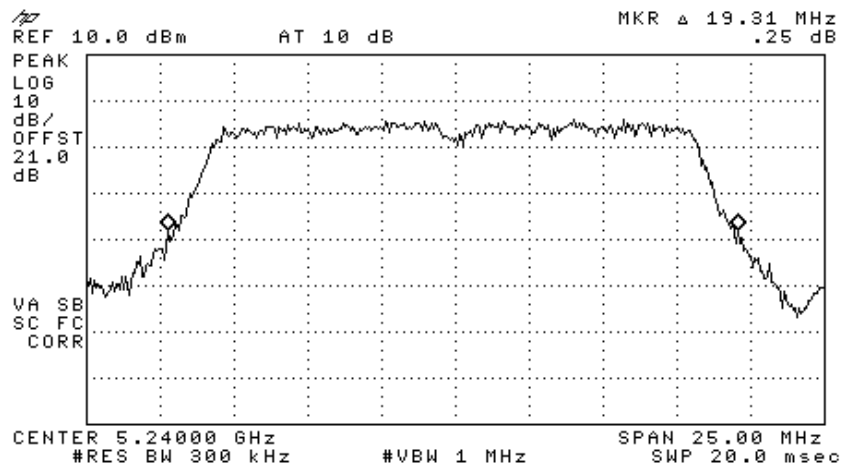


Figure 20 —5240 MHz BPSK

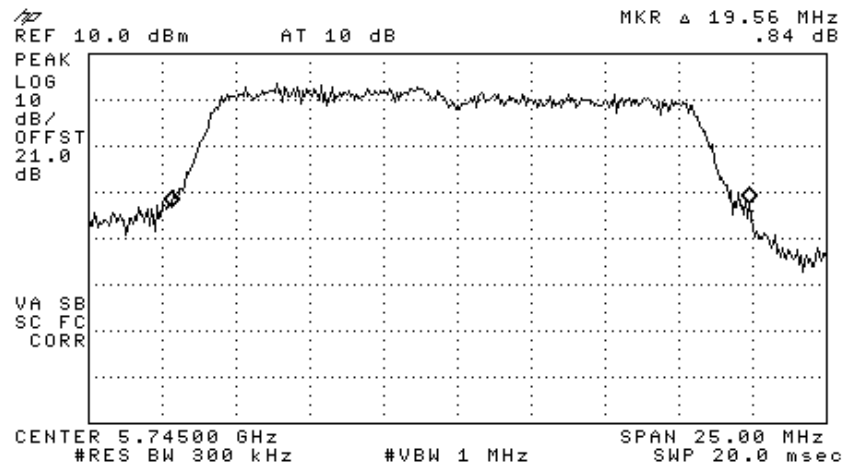


Figure 21 —5745 MHz BPSK

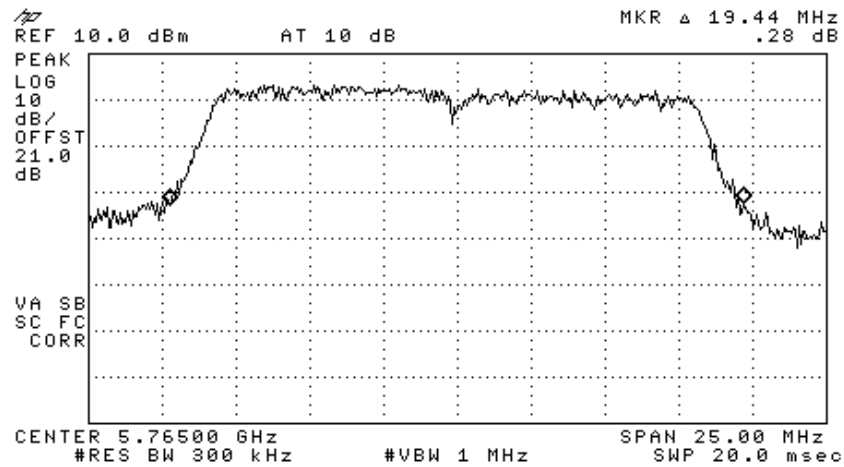


Figure 22 —5765 MHz BPSK

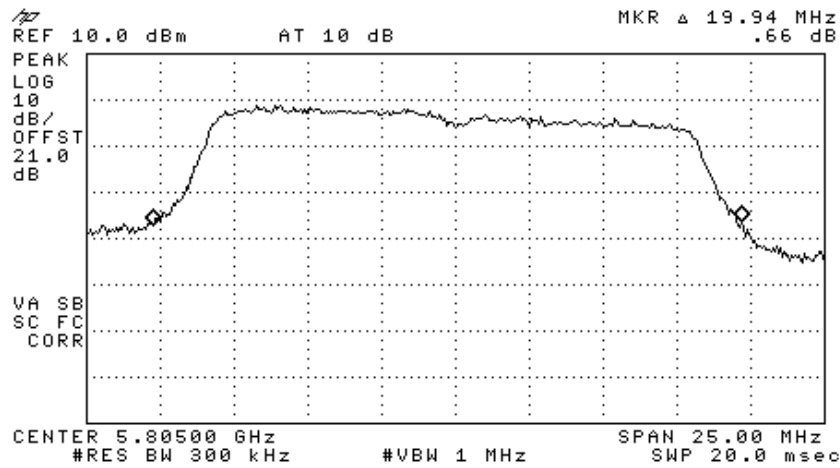


Figure 23 —5805 MHZ BPSK

Operation Frequency (MHz)	Modulation	26 dB Bandwidth (dBm)
5180	64QAM	19.13
	BPSK	19.75
5200	64QAM	19.06
	BPSK	19.31
5240	64QAM	19.00
	BPSK	19.31
5745	64QAM	18.75
	BPSK	19.56
5765	64QAM	19.44
	BPSK	19.44
5805	64QAM	18.94
	BPSK	19.94

TEST PERSONNEL:

Tester Signature: *E. Pitt*

Date: 05.02.08

Typed/Printed Name: E. Pitt

6.2 Test Equipment Used.

26 dB Minimum Bandwidth

Instrument	Manufacturer	Model	Serial/Part Number	Calibration	
				Last Calibr.	Period
Spectrum Analyzer	HP	8592L	3826A01204	February 22, 2007	1 year
Attenuator	Jyebao	-	FAT-AM5AF5G6G2W20	May 9, 2007	1 year
Cable	Rhophase	KPS-5000-KPS	A1674	February 8, 2007	1 year
Cable	Rhophase	KPS-1501-1000	A1675	December 16, 2006	1 year

Figure 24 Test Equipment Used

7. Maximum Conducted Output Power 5 GHz Transmitter 802.11b/g+802.11a Signals

7.1 Test procedure

The E.U.T. antenna terminal was connected to the Spectrum Analyzer through an external attenuator (20 dB) and an appropriate coaxial cable (Cable Loss = 1 dB). The Spectrum Analyzer was set to 1.0 MHz resolution BW. Sample detector and maximum hold were used.

The E.U.T. was tested at 5180, 5200, 5240, 5745, 5765, and 5805 MHz with the following modulations: 64QAM (54Mbit/sec) and BPSK (6Mbit/sec).

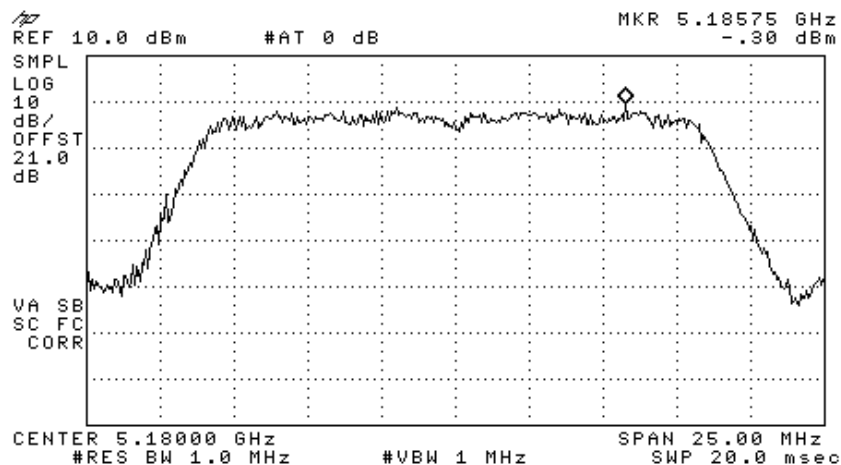


Figure 25 5180 MHz 64QAM

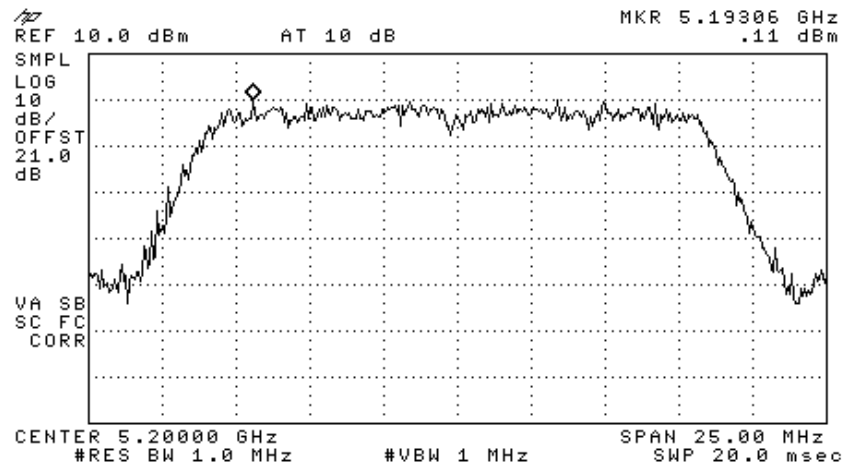


Figure 26 5200 MHz 64QAM

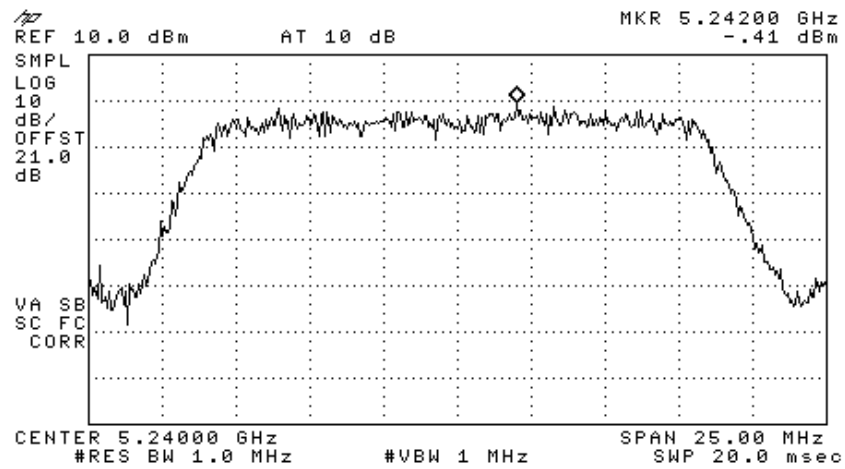


Figure 27 5240 MHz 64QAM

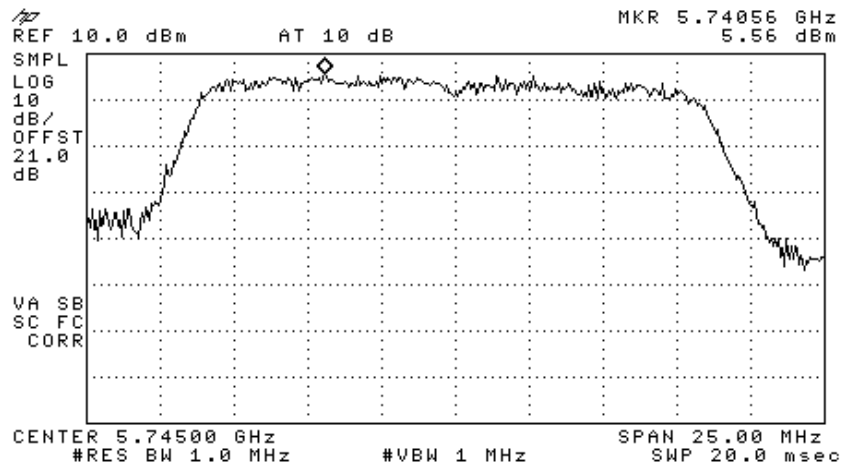


Figure 28 5745 MHz 64QAM

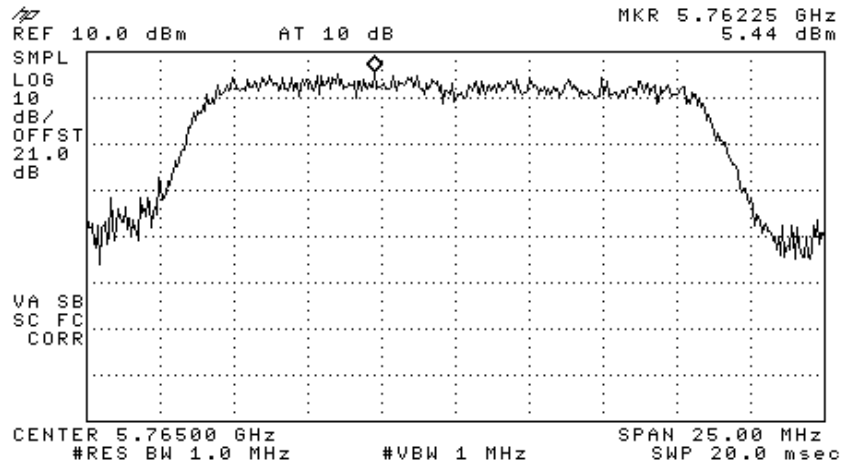


Figure 29 5765 MHz 64QAM

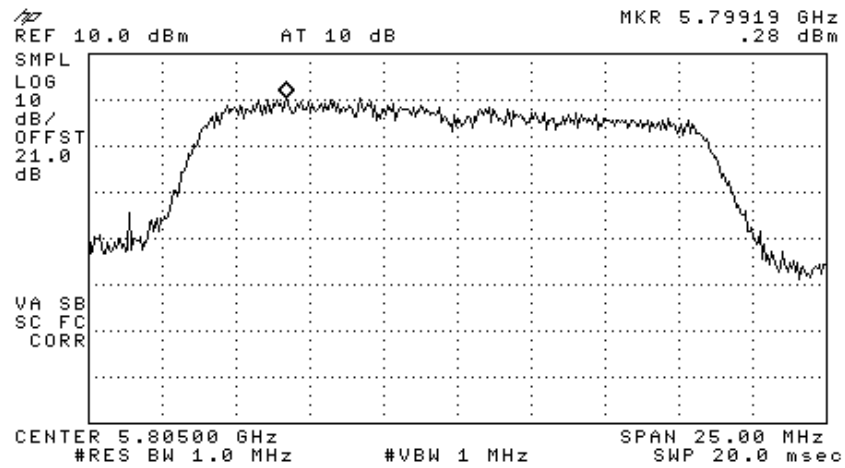


Figure 30 5805 MHz 64QAM

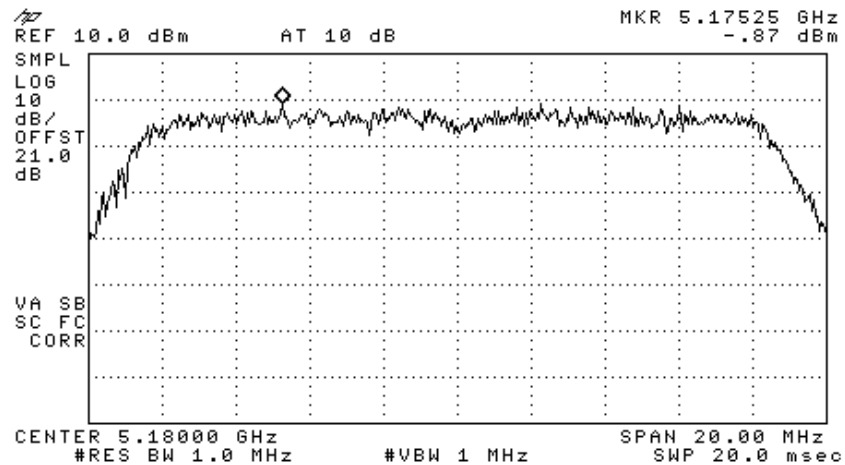


Figure 31 5180 MHz BPSK

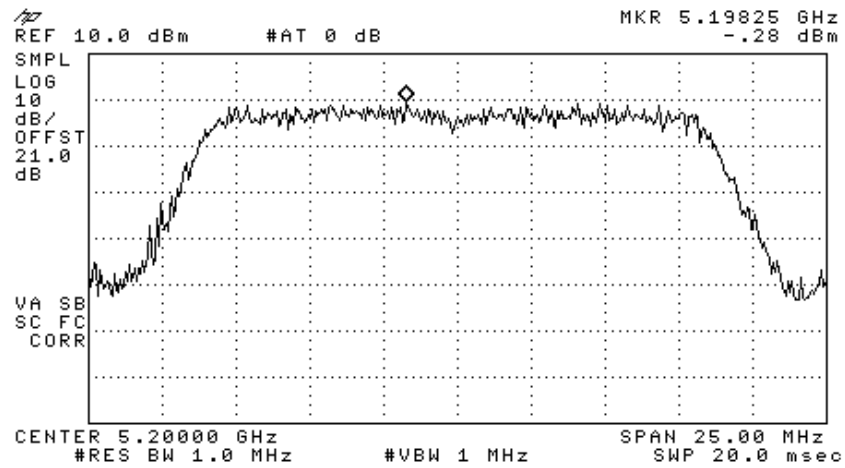


Figure 32 5200 MHz BPSK

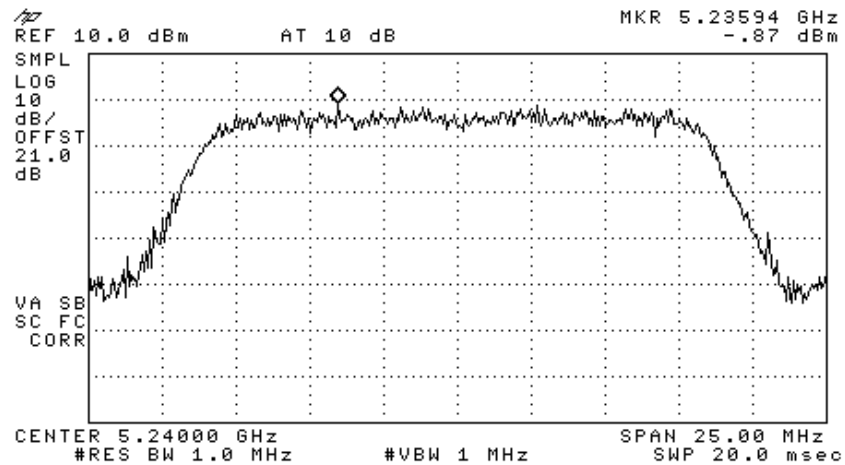


Figure 33 5240 MHz BPSK

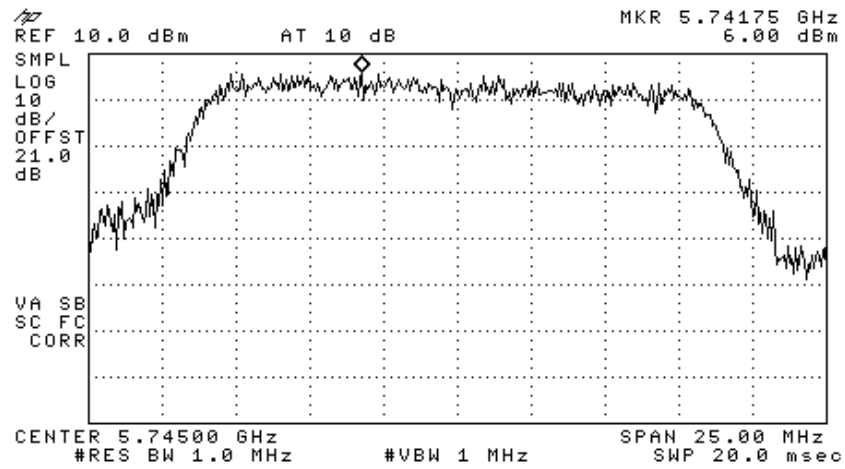


Figure 34 5745 MHz BPSK

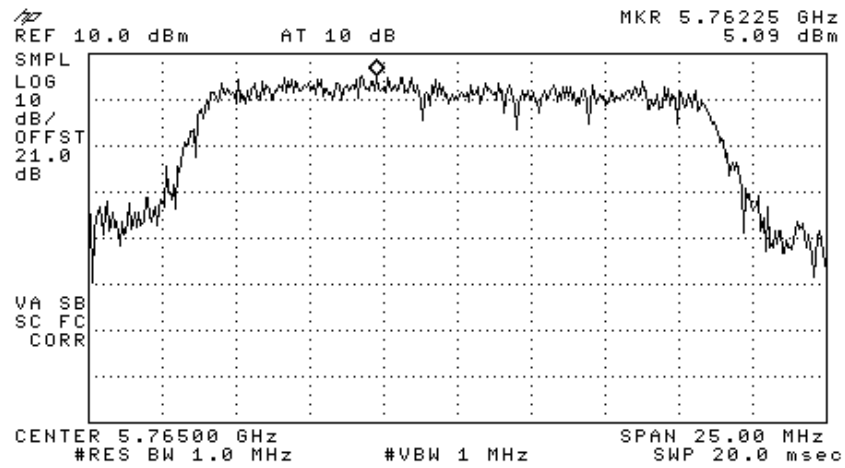


Figure 35 5765 MHz BPSK

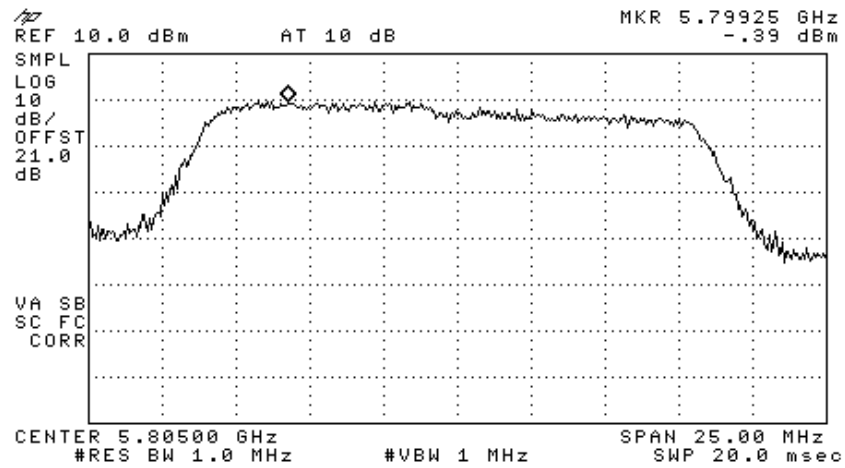


Figure 36 5805 MHz BPSK

7.2 Results table

E.U.T. Description: WLAN Module With WCE (WiFi Coverage Extender) for DAS
With 4 Cisco 1242 Access Points

Model No.: 860M With WCE

Serial Number: 1. 860M: 73903D 2. WCE: 739038

Specification: F.C.C. Part 15, Subpart E

Operation Frequency (MHz)	Modulation	Power (dBm)	Specification (dBm)	Margin (dB)
5180	64QAM	12.52	15.83	-3.31
	BPSK	12.09	15.96	-3.87
5200	64QAM	12.91	15.80	-2.89
	BPSK	12.58	15.86	-3.28
5240	64QAM	12.37	15.78	-3.41
	BPSK	12.00	15.86	-3.86
5745	64QAM	18.29	28.73	-10.44
	BPSK	18.91	28.91	-10.00
5765	64QAM	18.33	28.89	-10.56
	BPSK	17.98	28.89	-10.91
5805	64QAM	13.05	28.77	-15.72
	BPSK	12.61	29.00	-16.39

Figure 37 Maximum Peak Power Output

Note: Antenna Gain is 7 dBi

Peak Output Power = Reading + 10log EBW

For 5.18; 5.20, 5.24 GHz Peak Output Power Limit = 4 + 10log EBW – (Antenna Gain –6)

For 5.745; 5.765, 5.805 GHz Peak Output Power Limit = 17 + 10log EBW – (Antenna Gain –6)

JUDGEMENT: Passed by 2.89 dB

TEST PERSONNEL:

Tester Signature: 

Date: 05.02.08

Typed/Printed Name: E. Pitt

7.3 Test Equipment Used.

Peak Power Output

Instrument	Manufacturer	Model	Serial/Part Number	Calibration	
				Last Calibr.	Period
Spectrum Analyzer	HP	8592L	3826A01204	February 22, 2007	1 year
Attenuator	Jyebao	-	FAT-AM5AF5G6G2W20	May 9, 2007	1 year
Cable	Rhophase	KPS-5000-KPS	A1674	February 8, 2007	1 year

Figure 38 Test Equipment Used

8. Peak Power Spectral Density 5GHz Transmitter 802.11b/g+802.11a Signals

[In accordance with section 15.407(a)]

8.1 Test procedure

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator (20dB) and an appropriate coaxial cable (Cable Loss = 1 dB). The spectrum analyzer was set to 1 MHz resolution BW. and 1 MHz video BW. The spectrum peaks were located at at 5180, 5200, 5240, 5745, 5765, and 5805 MHz with the following modulations: 64QAM (54Mbit/sec) and BPSK (6Mbit/sec).

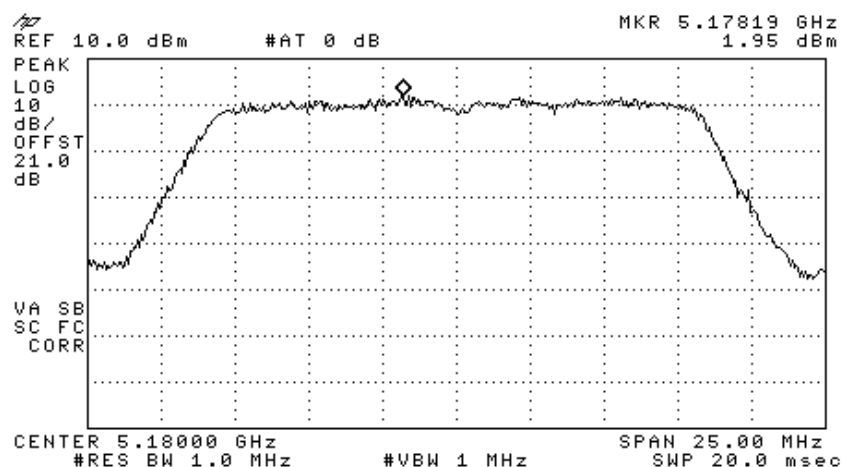


Figure 39 —5180 MHz 64QAM

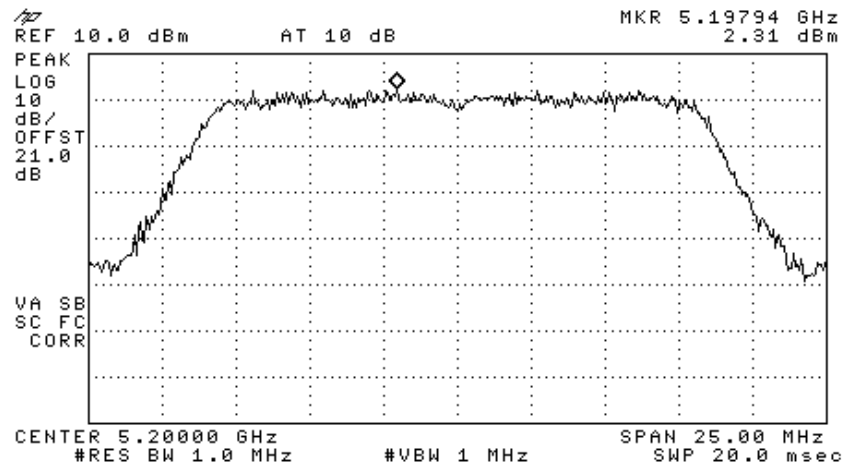


Figure 40 —5200 MHz 64QAM

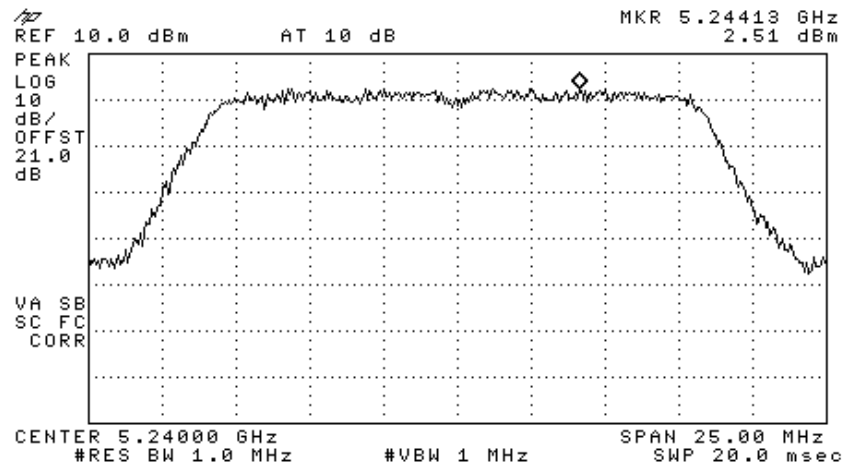


Figure 41 —5240 MHz 64QAM

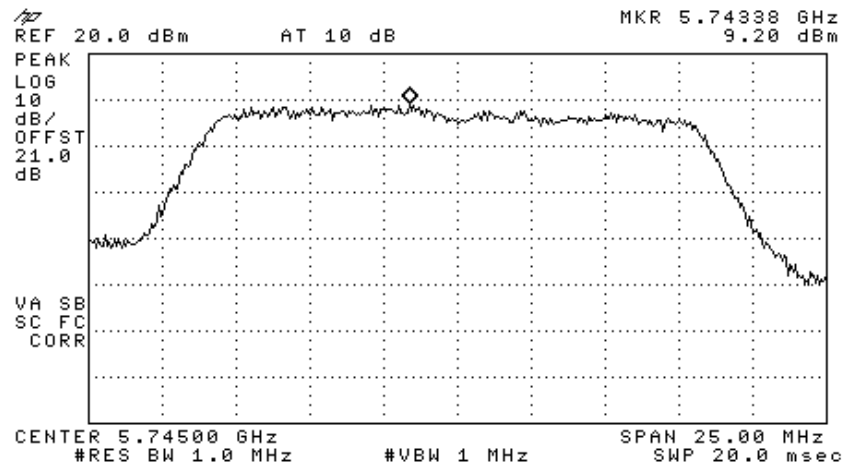


Figure 42 —5745 MHz 64QAM

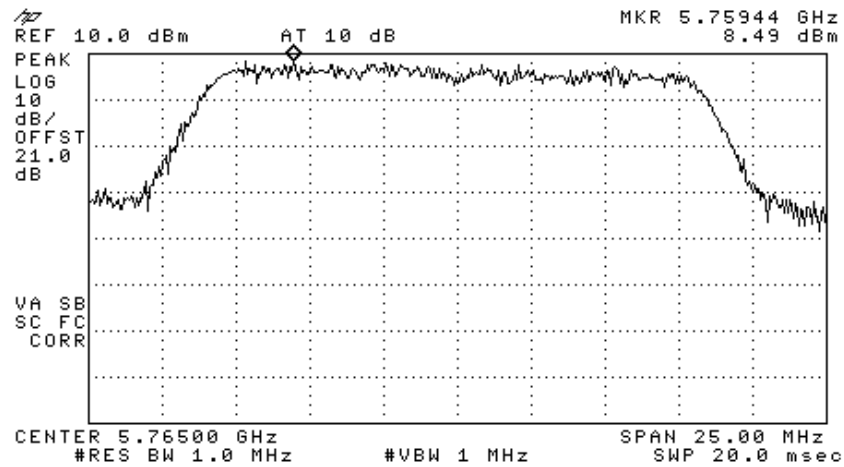


Figure 43 —5765 MHz 64QAM

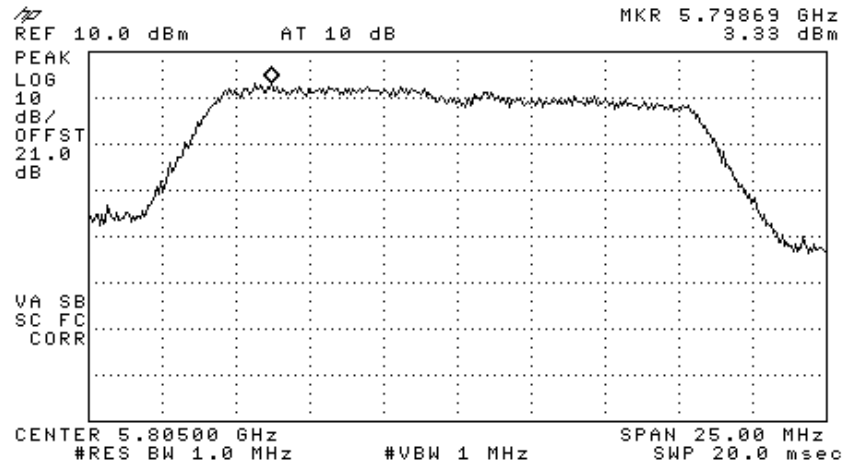


Figure 44 —5805 MHz 64QAM

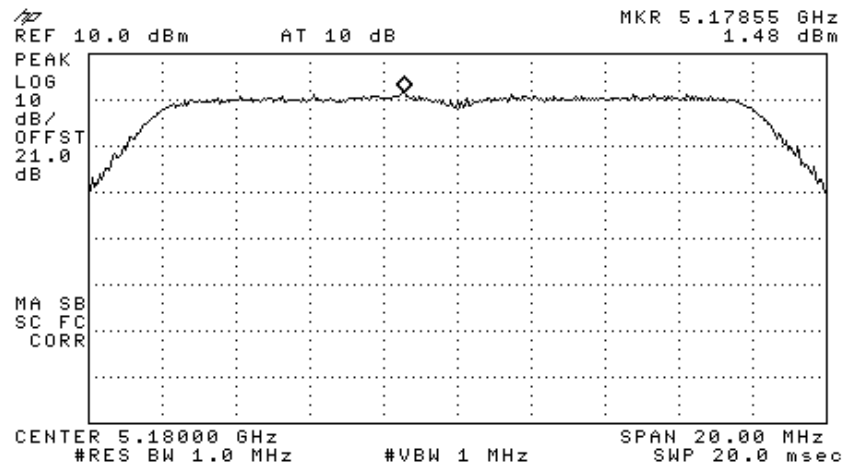


Figure 45 —5180 MHz BPSK

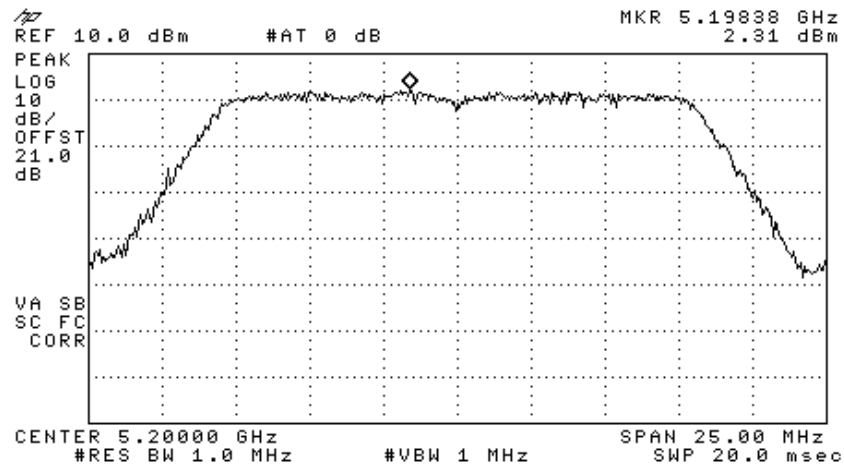


Figure 46 —5200 MHz BPSK

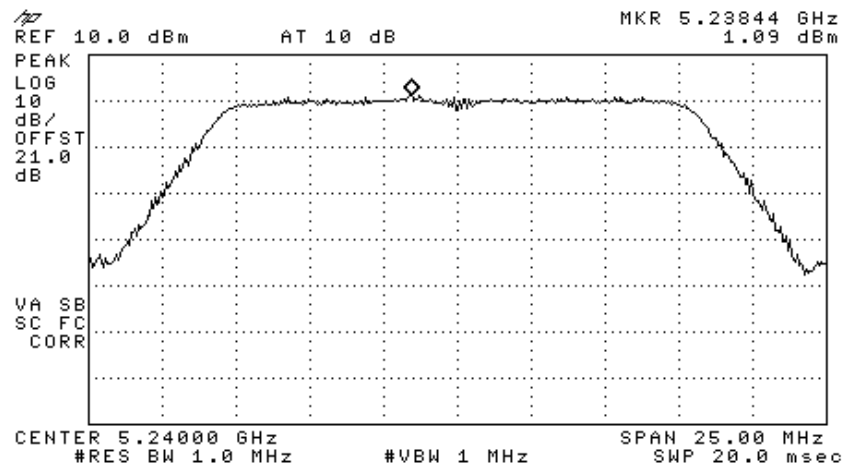


Figure 47 —5240 MHz BPSK

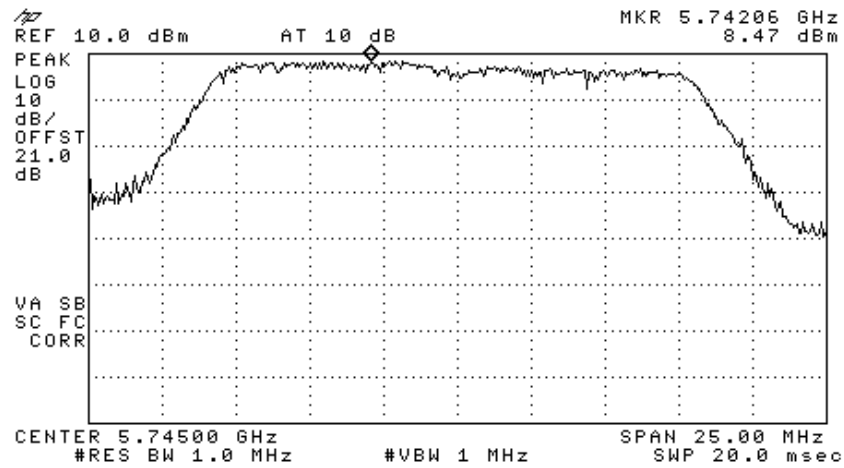


Figure 48 —5745 MHz BPSK

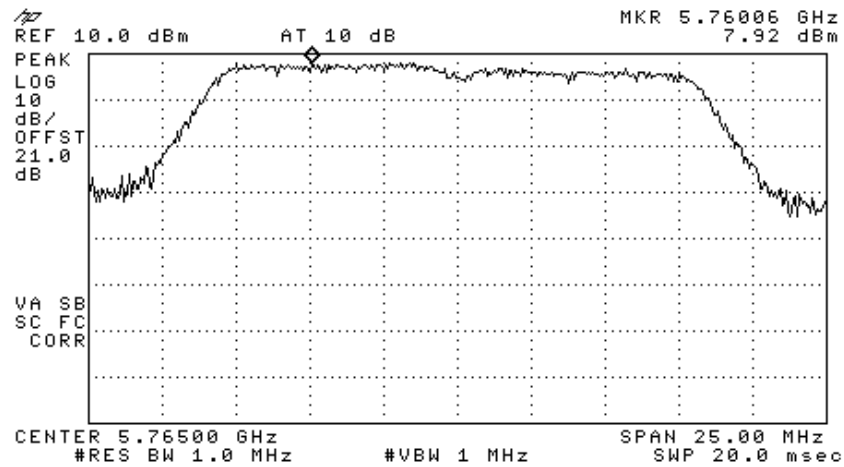


Figure 49 —5765 MHz BPSK

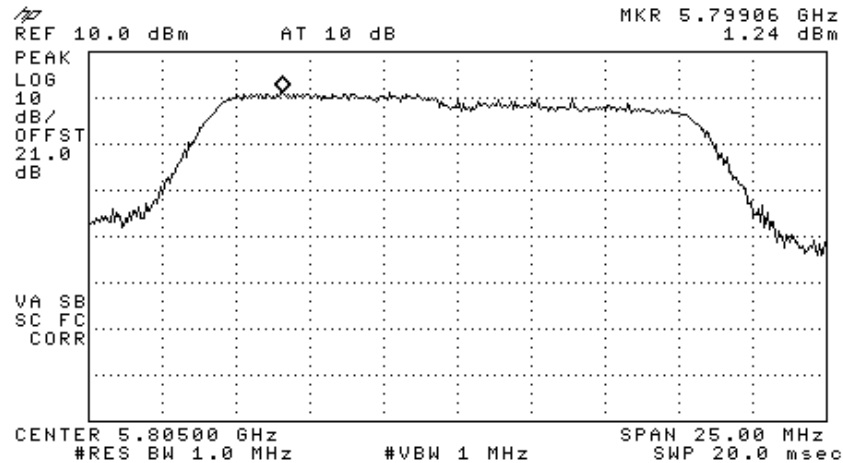


Figure 50 —5805 MHz BPSK

8.2 Results table

E.U.T. Description: WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Cisco 1242 Access Points

Model No.: 860M With WCE

Serial Number: 1. 860M: 73903D 2. WCE: 739038

Specification: F.C.C. Part 15, Subpart E (15.407(a))

Operation Frequency (MHz)	Modulation	Reading Spectrum Analyzer (dBm)	Specification (dBm)	Margin (dB)
5180	64QAM	1.95	3	-1.05
	BPSK	1.48	3	-1.52
5200	64QAM	2.31	3	-0.69
	BPSK	2.31	3	-0.69
5240	64QAM	2.51	3	-0.49
	BPSK	1.09	3	-1.91
5745	64QAM	9.2	16	-6.80
	BPSK	8.47	16	-7.53
5765	64QAM	8.49	16	-7.51
	BPSK	7.92	16	-8.08
5805	64QAM	3.33	16	-12.67
	BPSK	1.4	16	-14.60

Figure 51 Test Results



JUDGEMENT:

Passed by 0.67 dB

TEST PERSONNEL:

Tester Signature: E. Pitt

Date: 05.02.08

Typed/Printed Name: E. Pitt

8.3 Test Equipment Used.

Peak Power Spectral Density

Instrument	Manufacturer	Model	Serial/Part Number	Calibration	
				Last Calibr.	Period
Spectrum Analyzer	HP	8592L	3826A01204	February 22, 2007	1 year
Attenuator	Jyebao	-	FAT-AM5AF5G6G2W20	May 9, 2007	1 year
Cable	Rhophase	KPS-5000-KPS	A1674	February 8, 2007	1 year

Figure 52 Test Equipment Used

9. Ratio of Peak Excursion of Modulation Envelope to Maximum Conducted Output Power 5GHz Transmitter 802.11b/g+802.11a Signals

[In accordance with section 15.407(a)(6)]

9.1 Test procedure

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator (20dB) and an appropriate coaxial cable (Cable Loss = 1 dB). The spectrum analyzer was set to 1 MHz resolution BW. and 1 MHz video BW.

Trace A: Sample Detector

Trace B: Peak Detector

The E.U.T. was tested at 5180, 5200, 5240, 5745, 5765, and 5805 MHz with the following modulations: 64QAM (54Mbit/sec) and BPSK (6Mbit/sec).

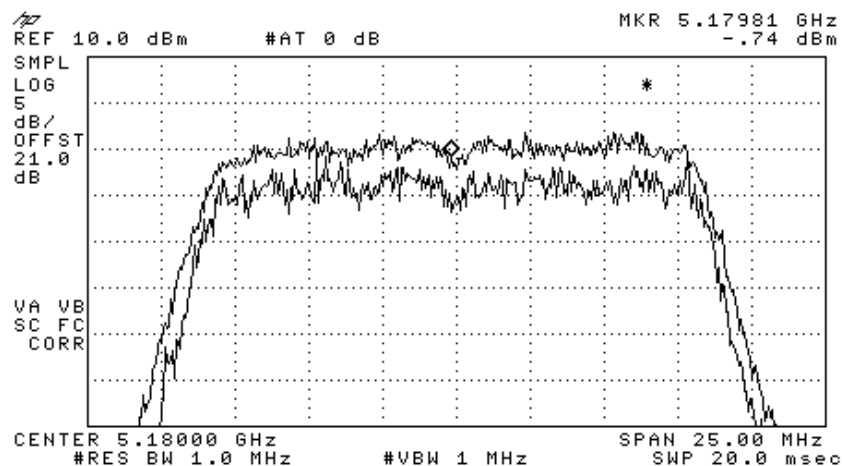


Figure 53 —5180 MHz 64QAM

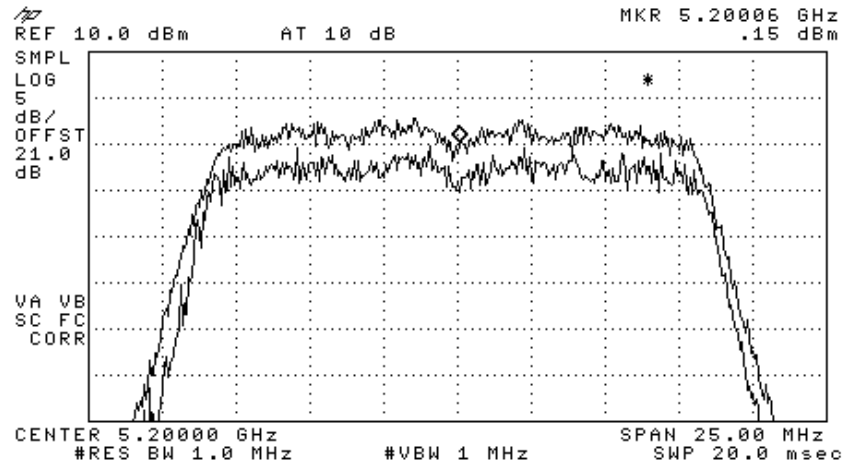


Figure 54 —5200 MHz 64QAM

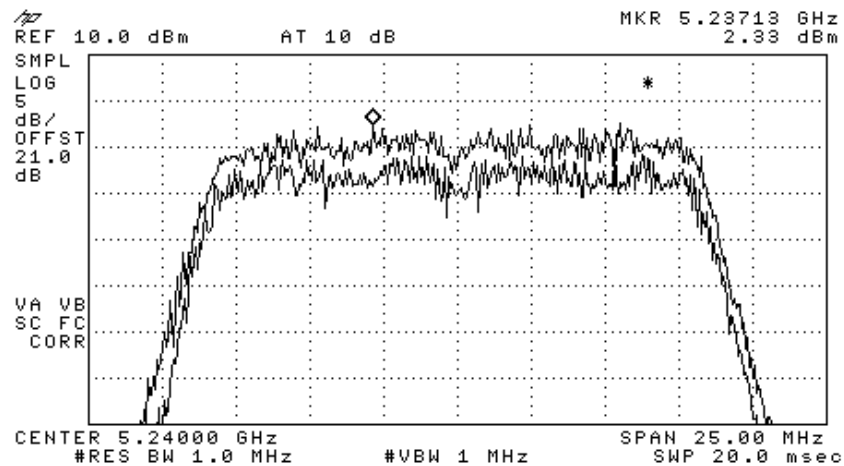


Figure 55 —5240 MHz 64QAM

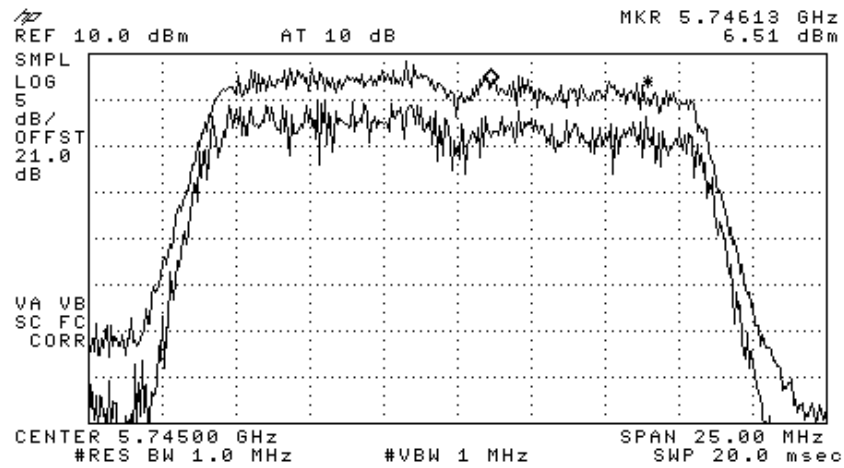


Figure 56 —5745 MHz 64QAM

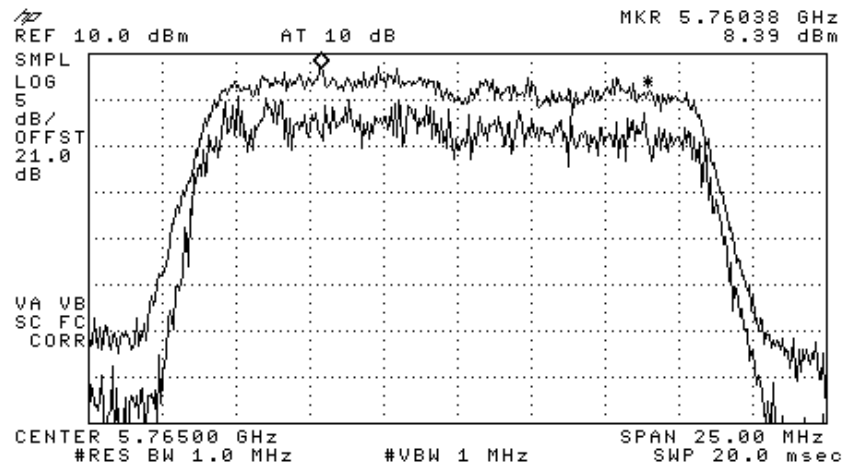


Figure 57 —5765 MHz 64QAM

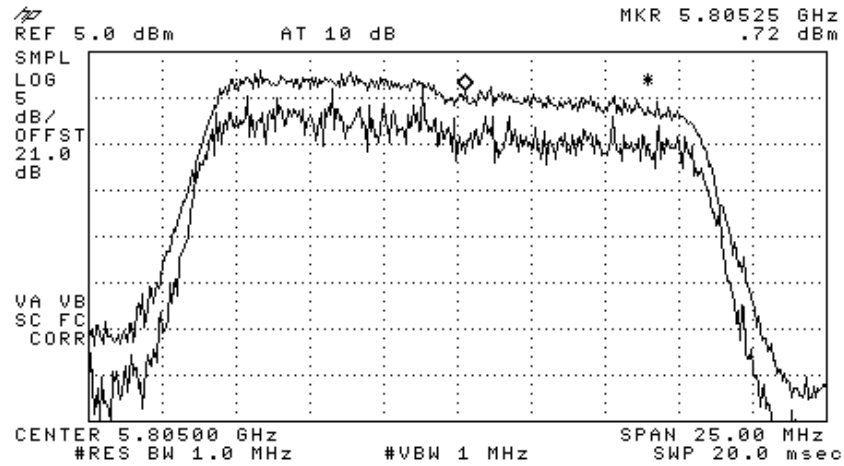


Figure 58 —5805 MHz 64QAM

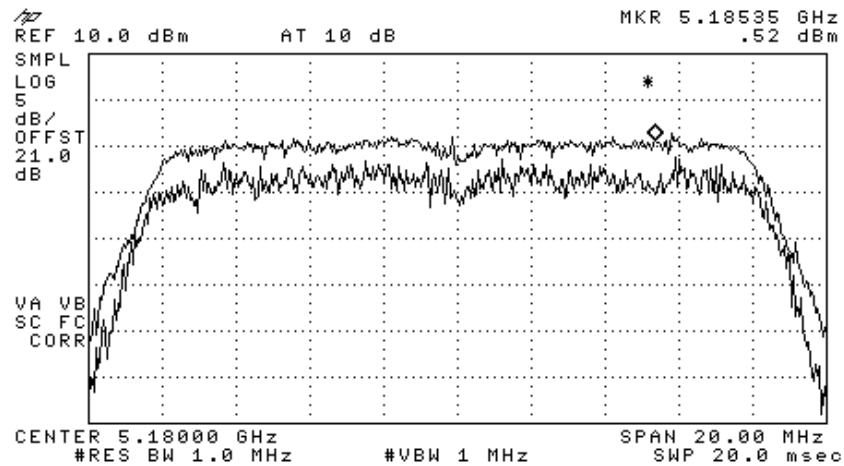


Figure 59 —5180 MHz BPSK

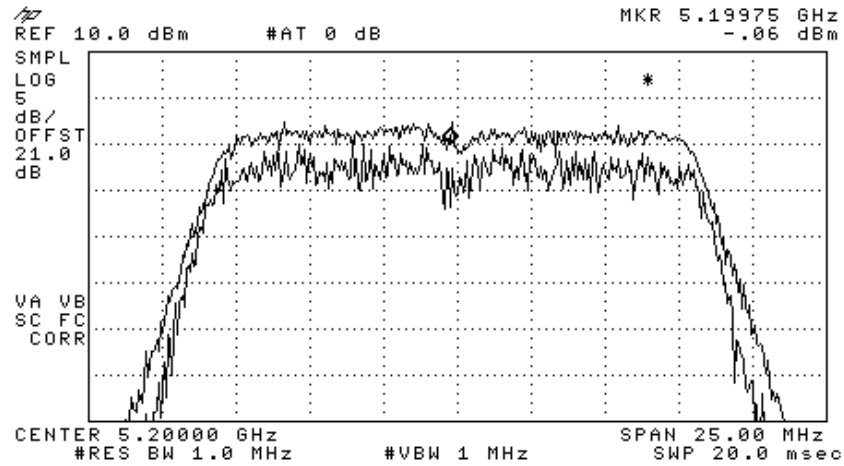


Figure 60 —5200 MHz BPSK

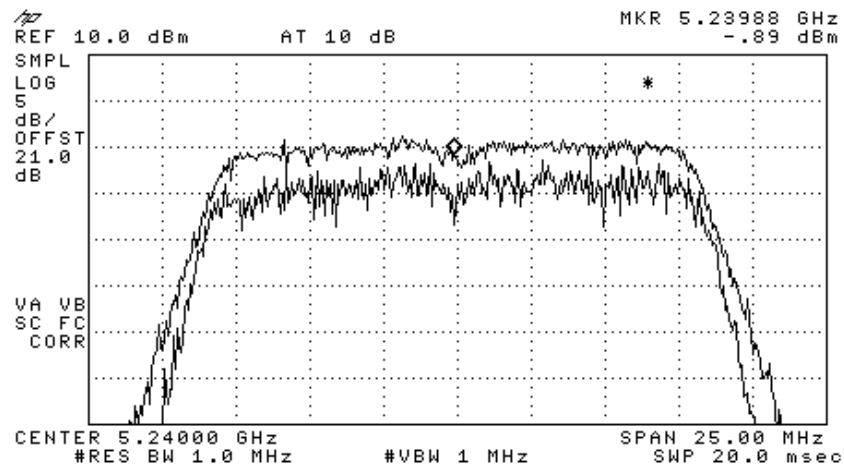


Figure 61 —5240 MHz BPSK

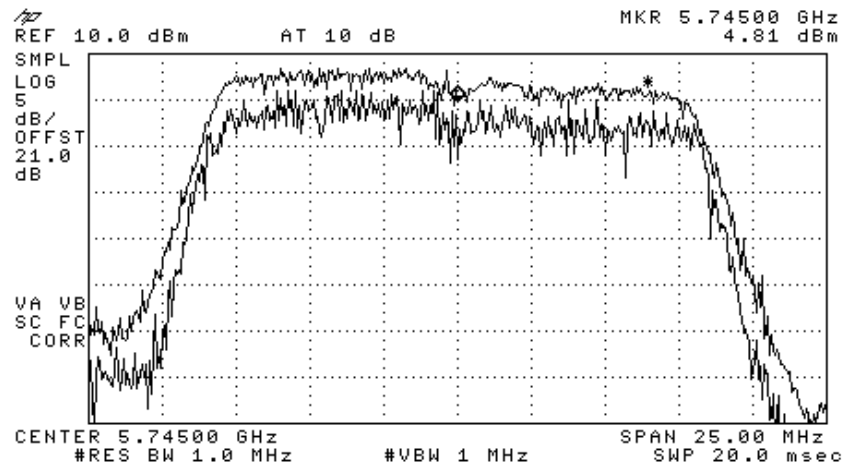


Figure 62 —5745 MHz BPSK

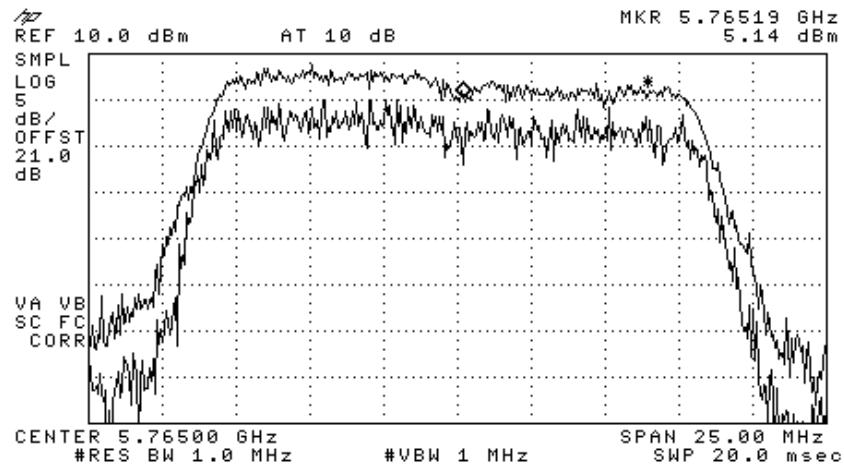


Figure 63 —5765 MHz BPSK

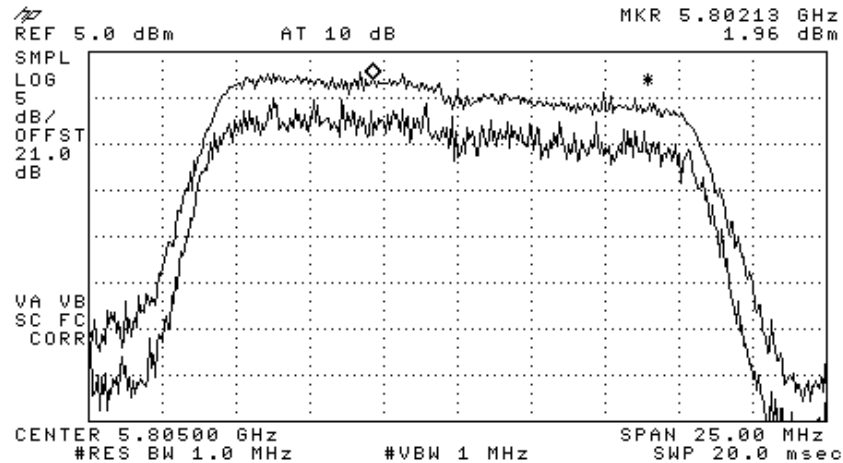


Figure 64 —5805 MHz BPSK

9.2 Results table

E.U.T. Description: WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Cisco 1242 Access Points

Model No.: 860M With WCE

Serial Number: 1. 860M: 73903D 2. WCE: 739038

Specification: F.C.C. Part 15, Subpart E (15.407(a)(6))

Operation Frequency (MHz)	Modulation	Delta (dB)	Specification (dB)	Margin (dB)
5180	64QAM	6.0	13	-7.0
	BPSK	5.7	13	-7.3
5200	64QAM	5.3	13	-7.7
	BPSK	6.7	13	-6.3
5240	64QAM	6.5	13	-6.5
	BPSK	7.6	13	-5.4
5745	64QAM	5.4	13	-7.6
	BPSK	6.2	13	-6.8
5765	64QAM	7.16	13	-5.84
	BPSK	7.3	13	-5.7
5805	64QAM	6.8	13	-6.2
	BPSK	5.8	13	-7.2

Figure 65 Test Results

JUDGEMENT: Passed by 5.4 dB

TEST PERSONNEL:

Tester Signature: 

Date: 05.02.08

Typed/Printed Name: E. Pitt

9.3 Test Equipment Used.

Peak Power Spectral Density

Instrument	Manufacturer	Model	Serial/Part Number	Calibration	
				Last Calibr.	Period
Spectrum Analyzer	HP	8592L	3826A01204	February 22, 2007	1 year
Attenuator	Jyebao	-	FAT-AM5AF5G6G2W20	May 9, 2007	1 year
Cable	Rhophase	KPS-5000-KPS	A1674	February 8, 2007	1 year

Figure 66 Test Equipment Used

10. Peak Power Output Out of 5150-5250; 5725-5825 MHz Bands 5 GHz Transmitter 802.11b/g+802.11a Signals

10.1 Test procedure

The E.U.T. antenna terminal was connected to the spectrum analyzer through an appropriate coaxial cable. The spectrum analyzer was set to 1 MHz resolution BW except for the frequency range 9 kHz-150 kHz where the RBW was set to 1kHz and the frequency range 150 kHz-10.0 MHz where the RBW was set to 10kHz. The frequency range from 9 kHz to 40 GHz was scanned. Level of spectrum components out of the 5150-5250; 5725-5825 MHz bands was measured at the selected operation frequencies.

The E.U.T. was tested at 5180, 5200, 5240, 5745, 5765, and 5805 MHz with the following modulations: 64QAM (54Mbit/sec) and BPSK (6Mbit/sec).

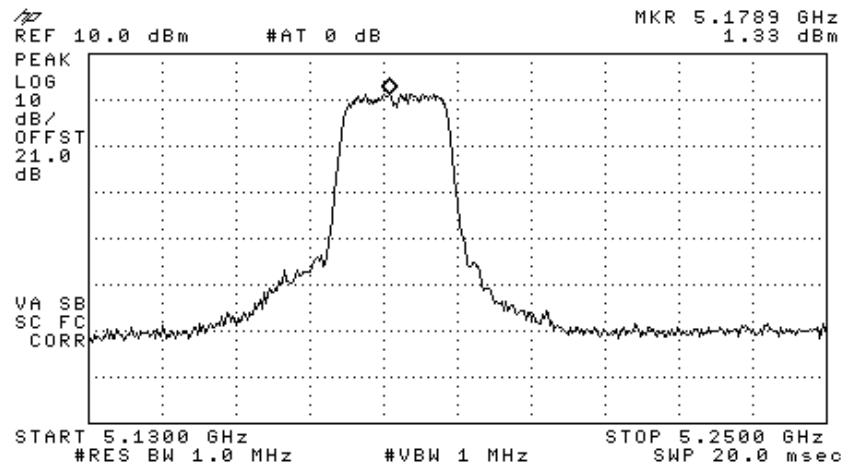


Figure 67 —5180 MHz 64QAM

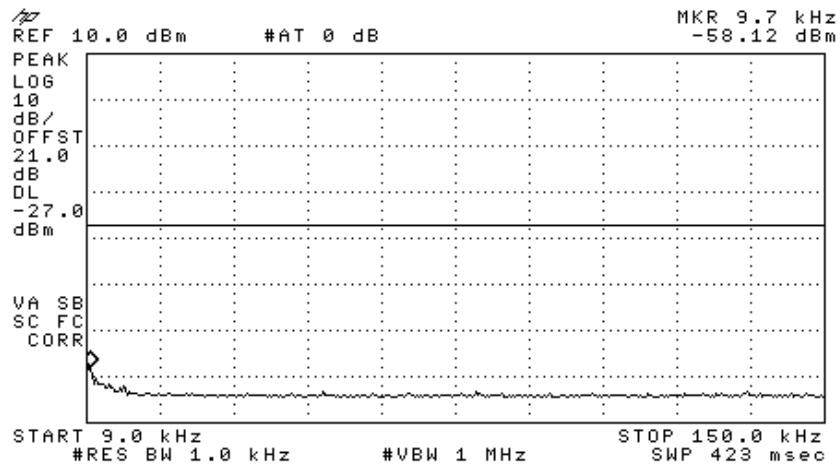


Figure 68 —5180 MHz 64QAM

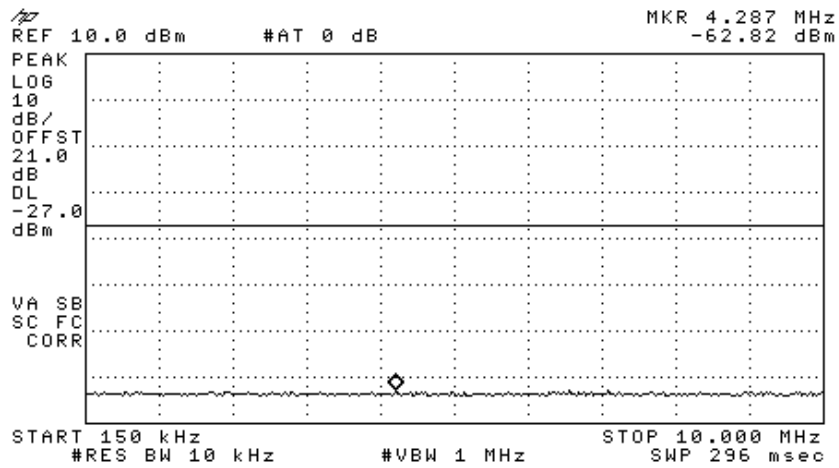


Figure 69 —5180 MHz 64QAM

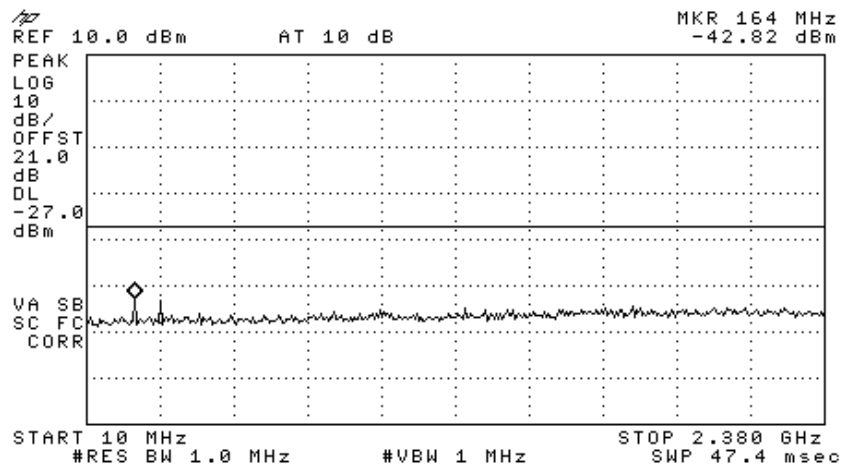


Figure 70 —5180 MHz 64QAM

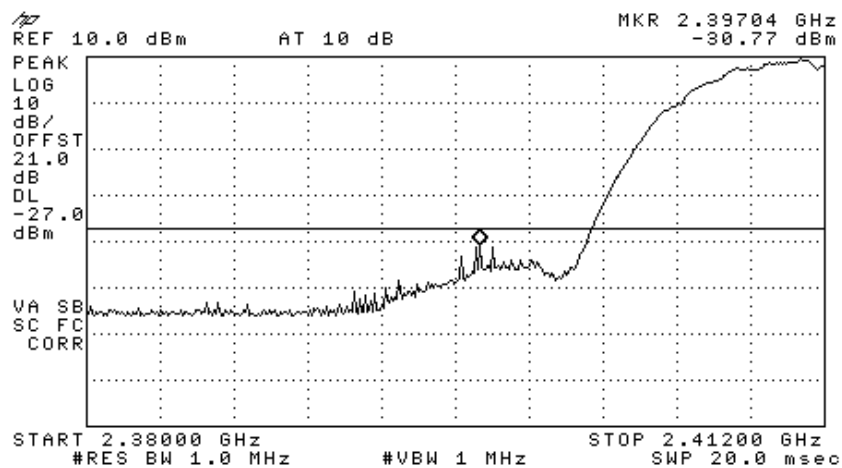


Figure 71 —5180 MHz 64QAM

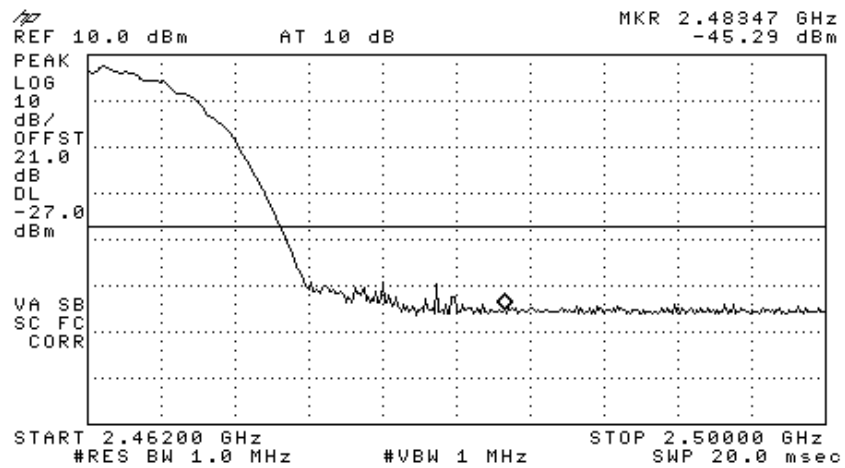


Figure 72 —5180 MHz 64QAM

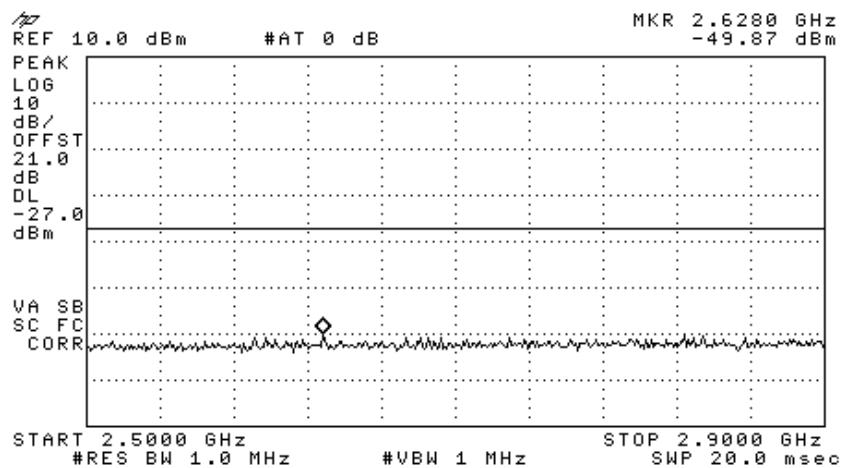


Figure 73 —5180 MHz 64QAM

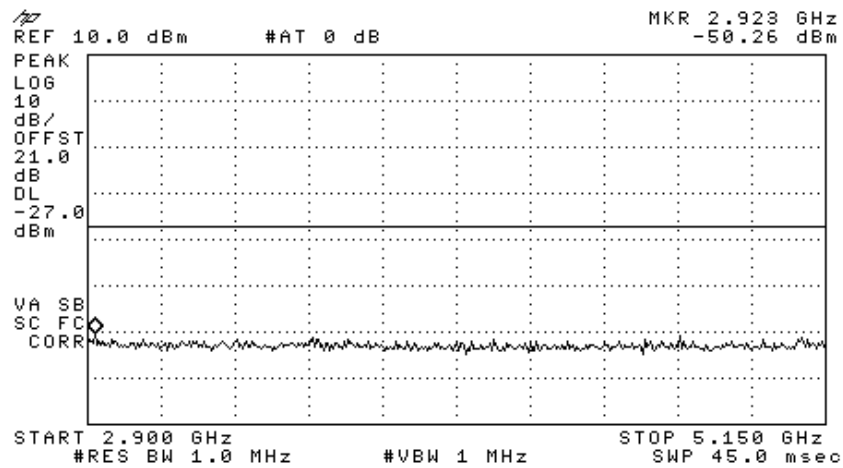


Figure 74 —5180 MHz 64QAM

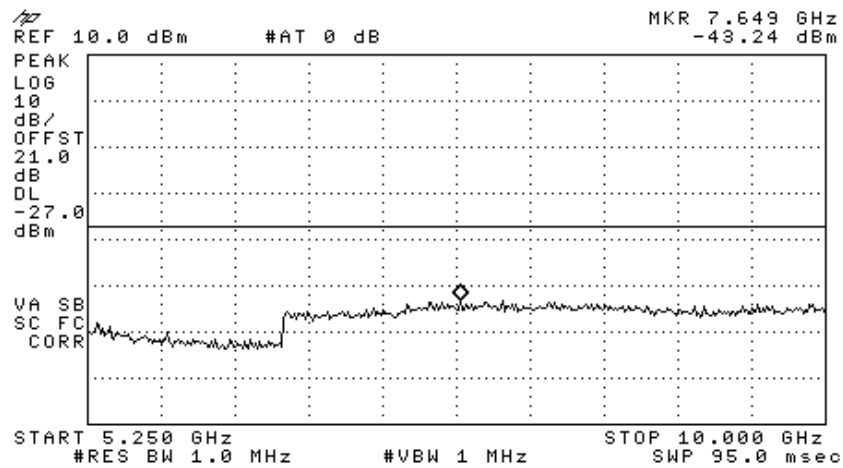


Figure 75 —5180 MHz 64QAM

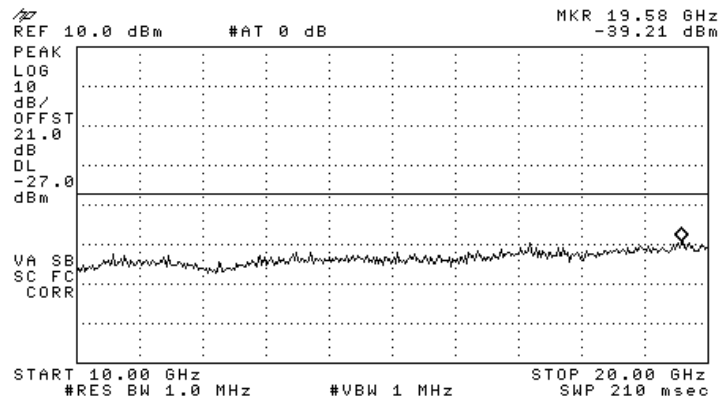


Figure 76 —5180 MHz 64QAM

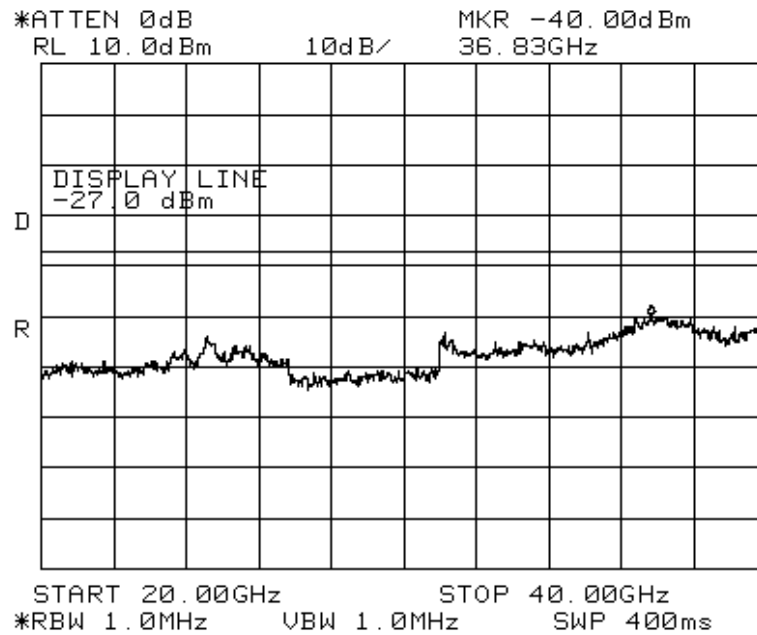


Figure 77 —5180 MHz 64QAM

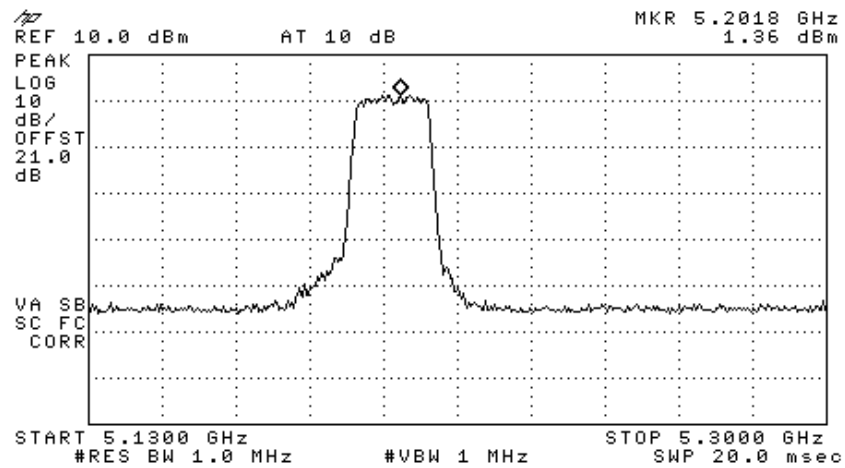


Figure 78 —5200 MHz 64QAM

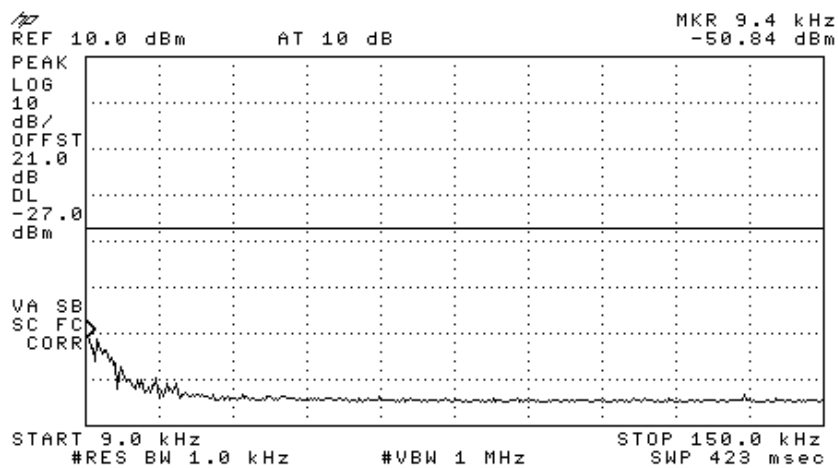


Figure 79 —5200 MHz 64QAM

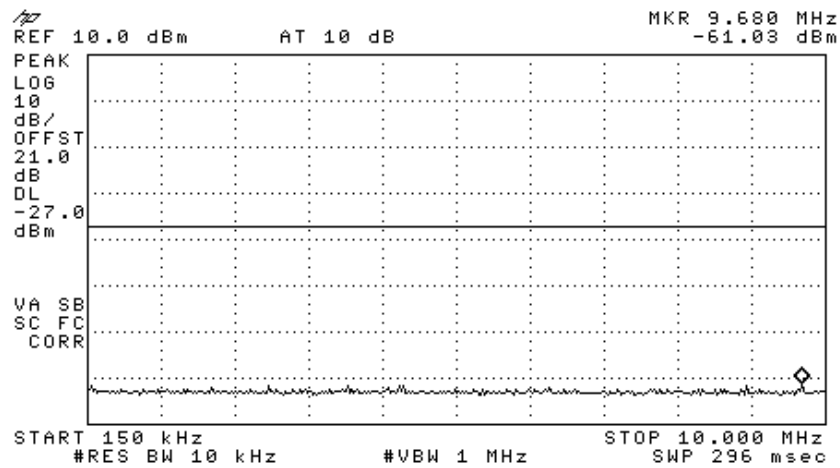


Figure 80 —5200 MHz 64QAM

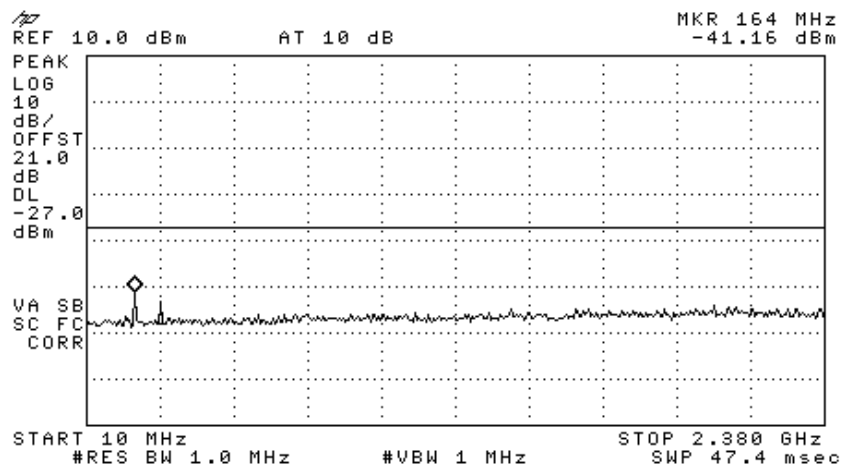


Figure 81 —5200 MHz 64QAM

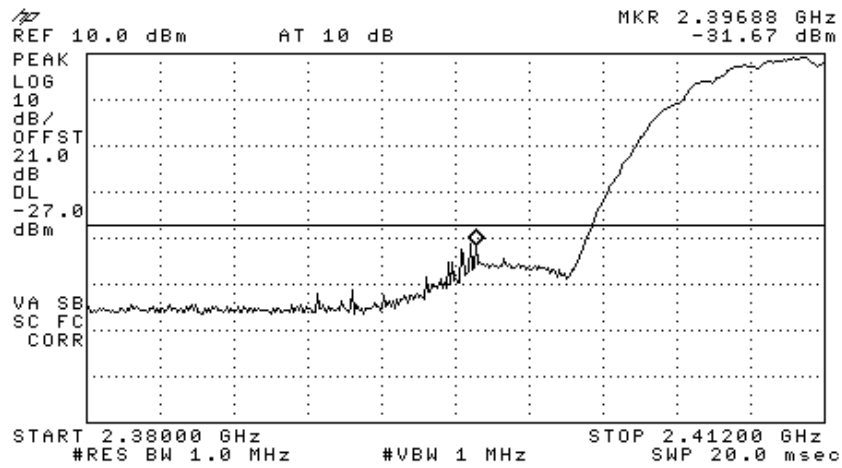


Figure 82 —5200 MHz 64QAM

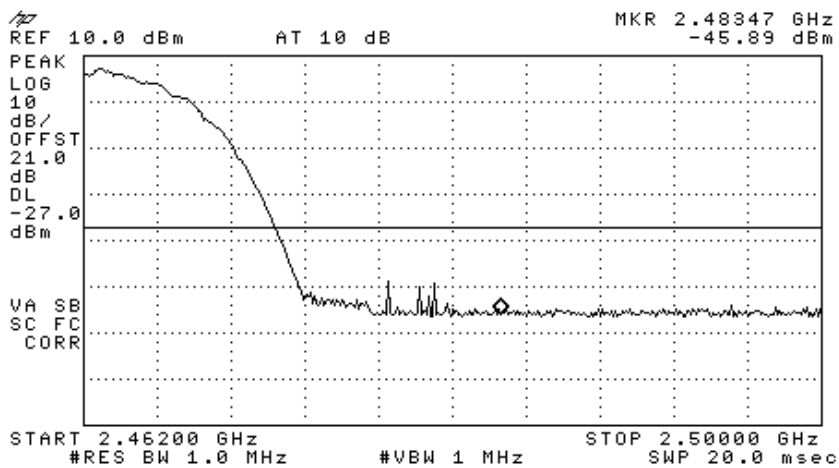


Figure 83 —5200 MHz 64QAM

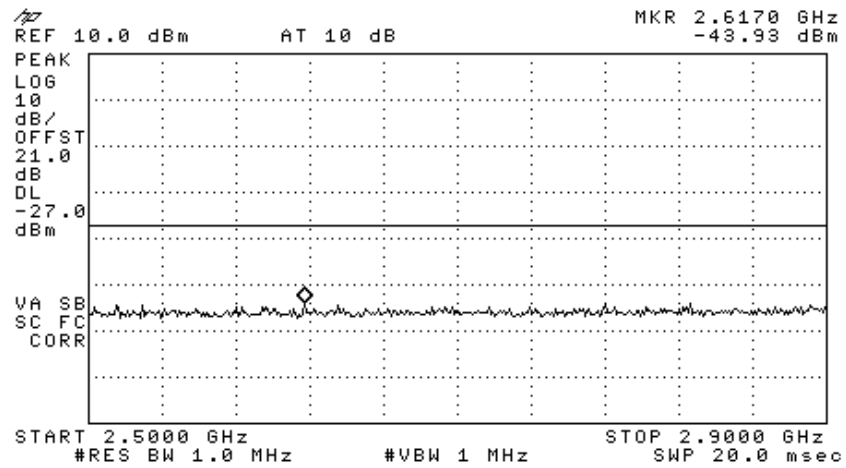


Figure 84 —5200 MHz 64QAM

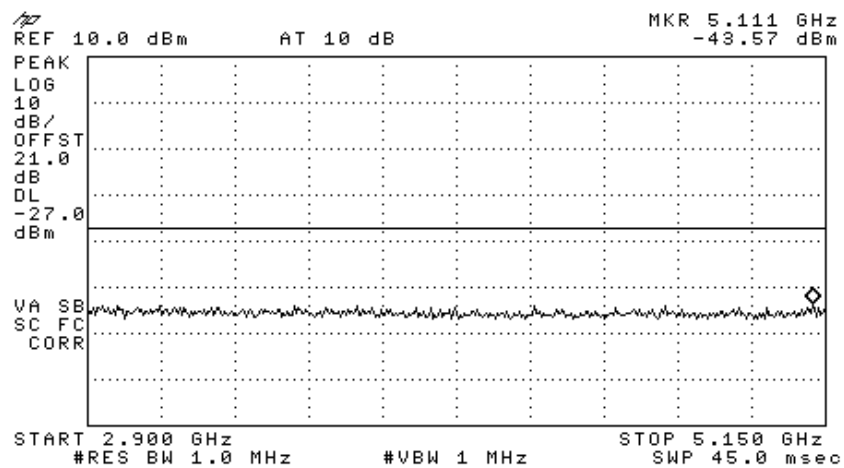


Figure 85 —5200 MHz 64QAM

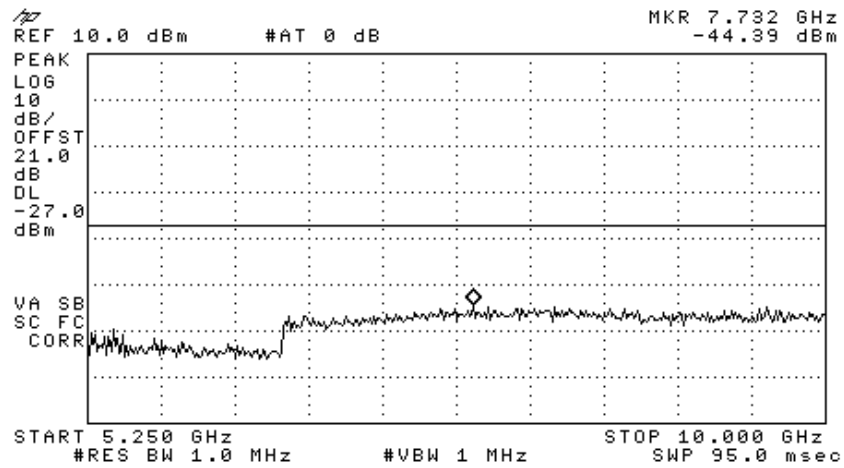


Figure 86 —5200 MHz 64QAM

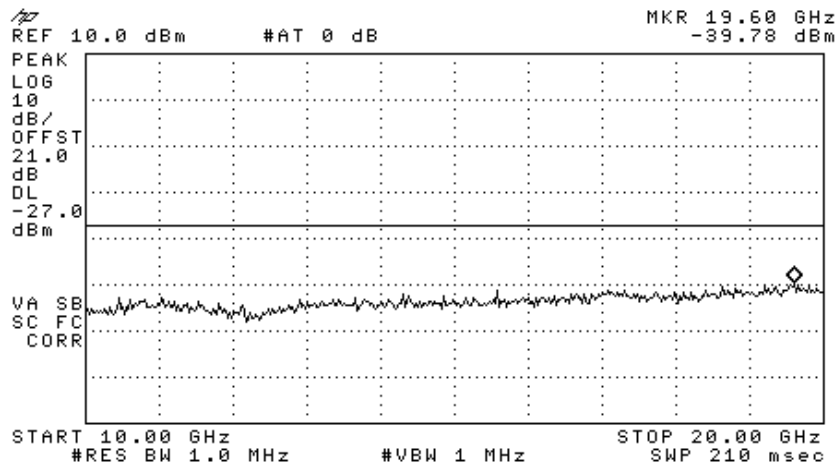


Figure 87 —5200 MHz 64QAM

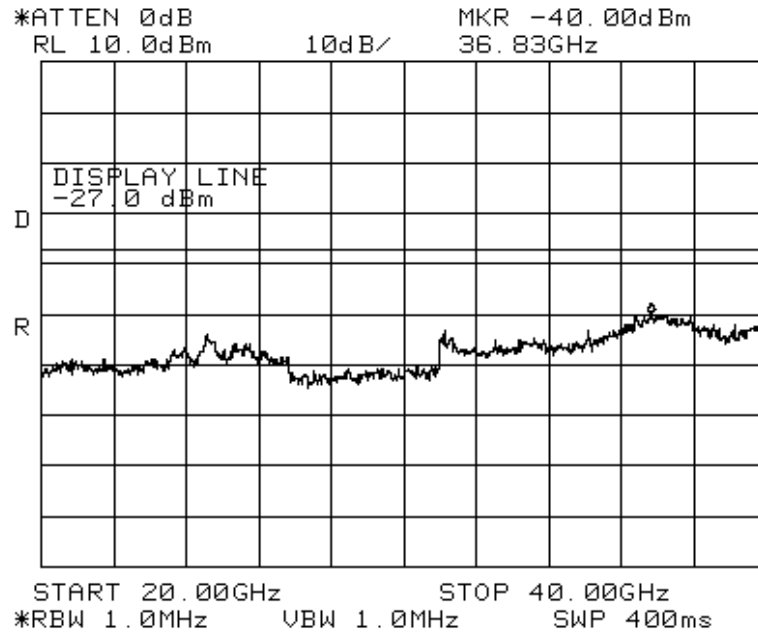


Figure 88 —5200 MHz 64QAM

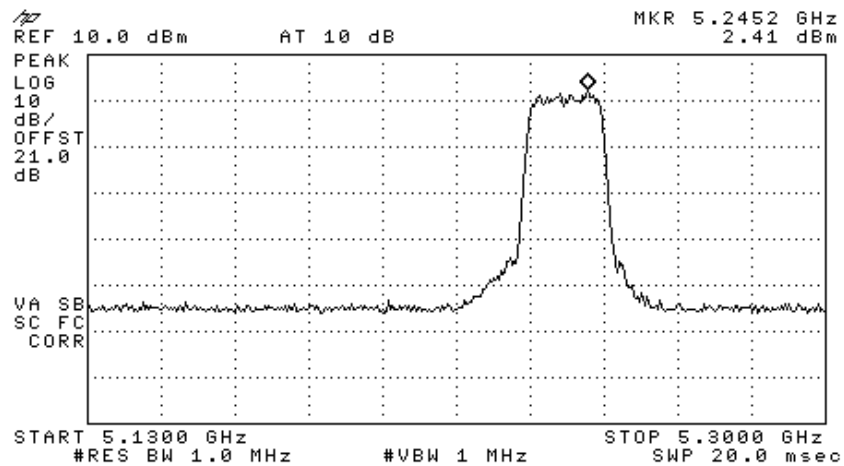


Figure 89 —5240 MHz 64QAM

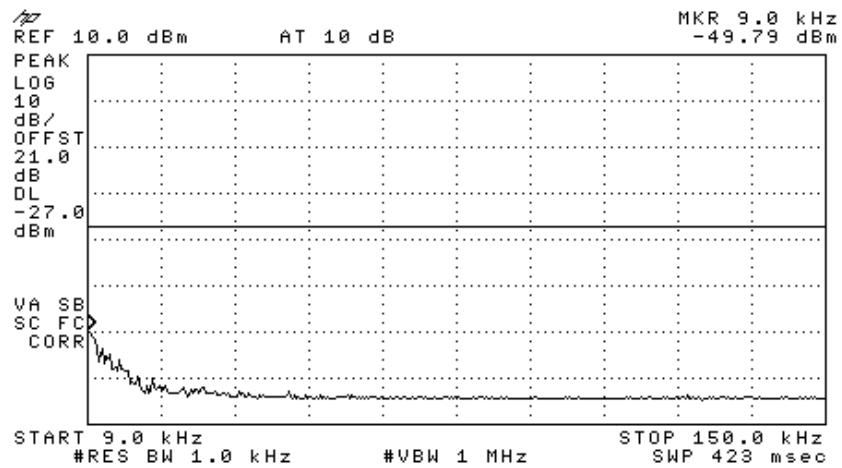


Figure 90 —5240 MHz 64QAM

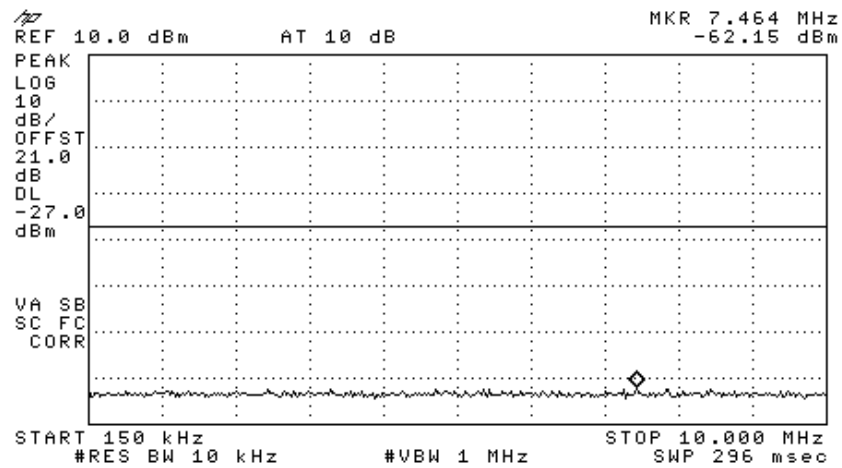


Figure 91 —5240 MHz 64QAM

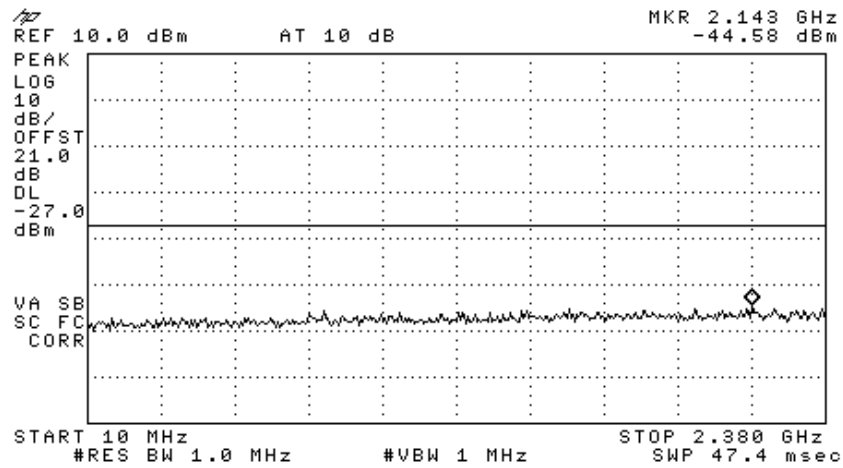


Figure 92 —5240 MHz 64QAM

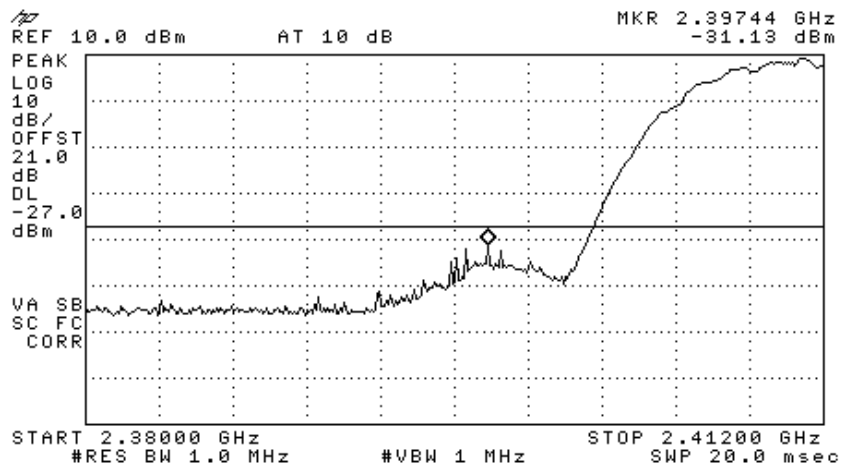


Figure 93 —5240 MHz 64QAM

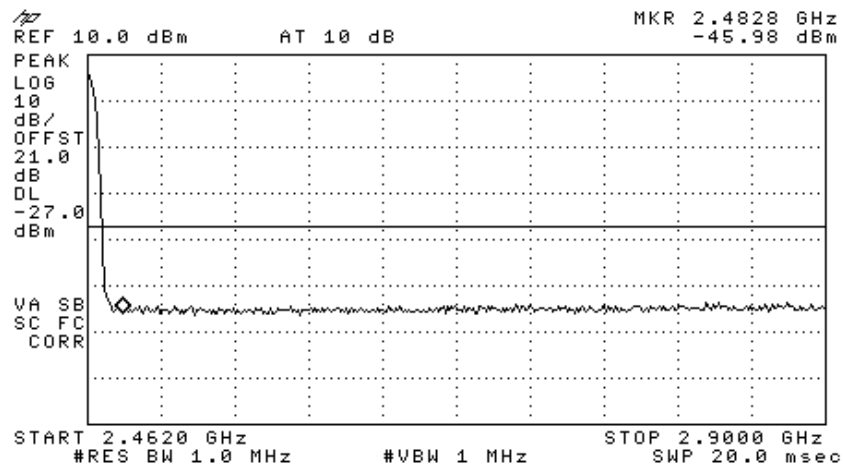


Figure 94 —5240 MHz 64QAM

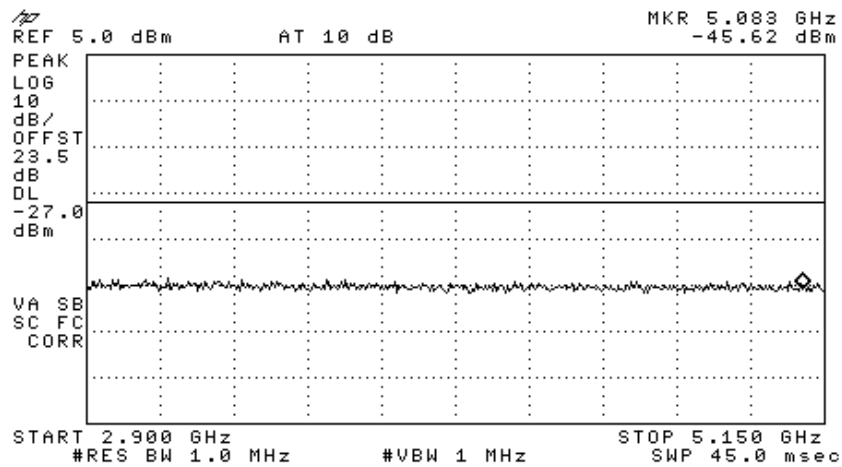


Figure 95 —5240 MHz 64QAM

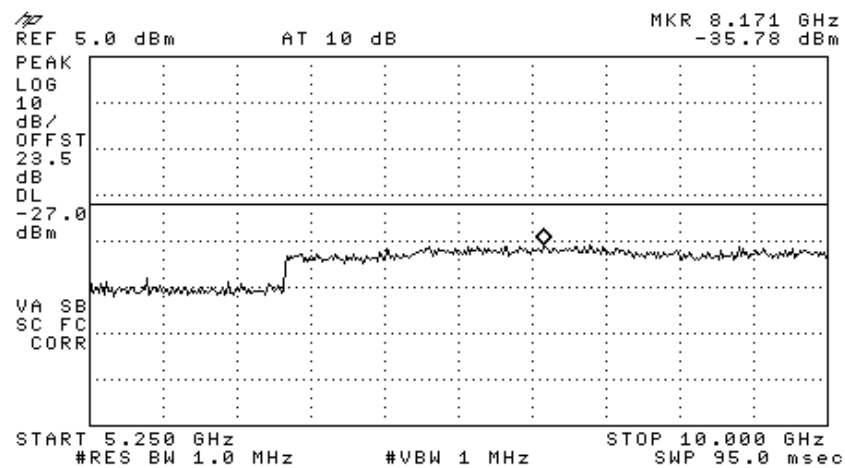


Figure 96 — 5240 MHz 64QAM

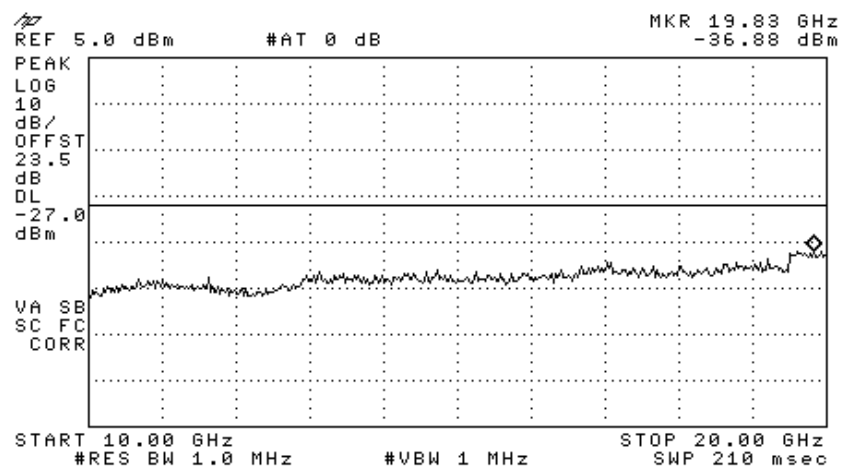


Figure 97 —5240 MHz 64QAM

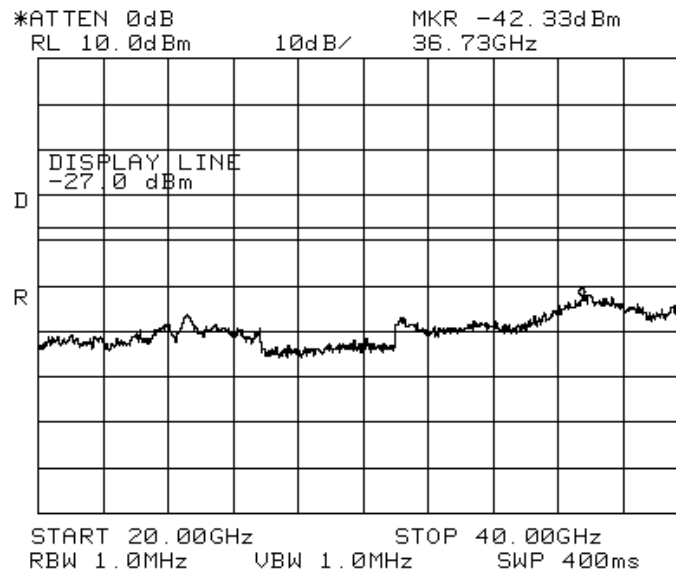


Figure 98 —5240 MHz 64QAM

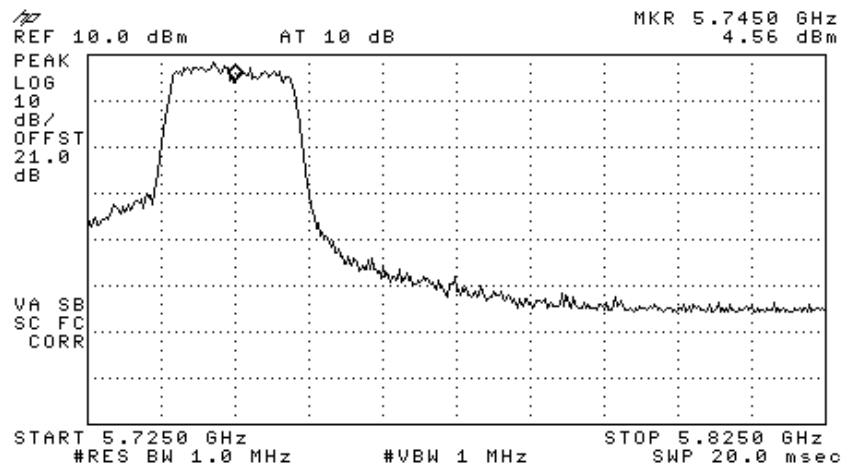


Figure 99 —5745 MHz 64QAM

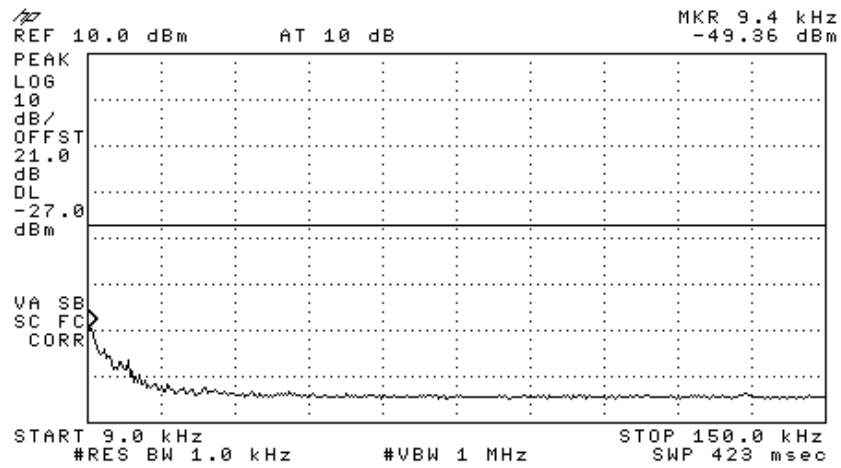


Figure 100 —5745 MHz 64QAM

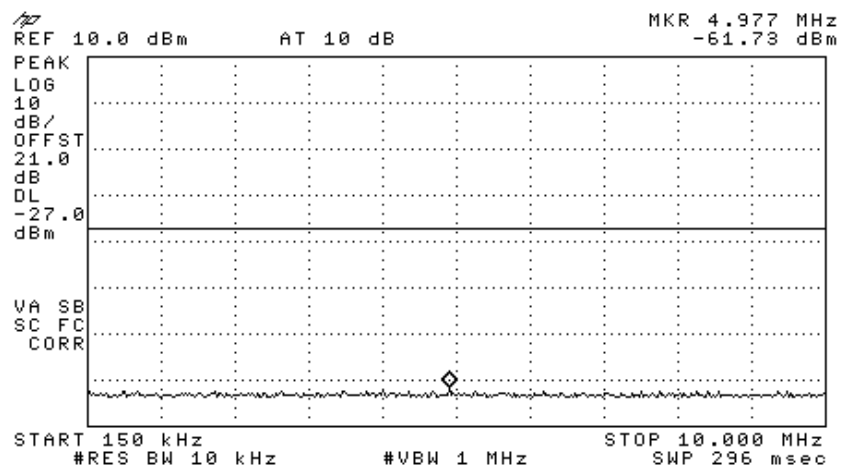


Figure 101 —5745 MHz 64QAM

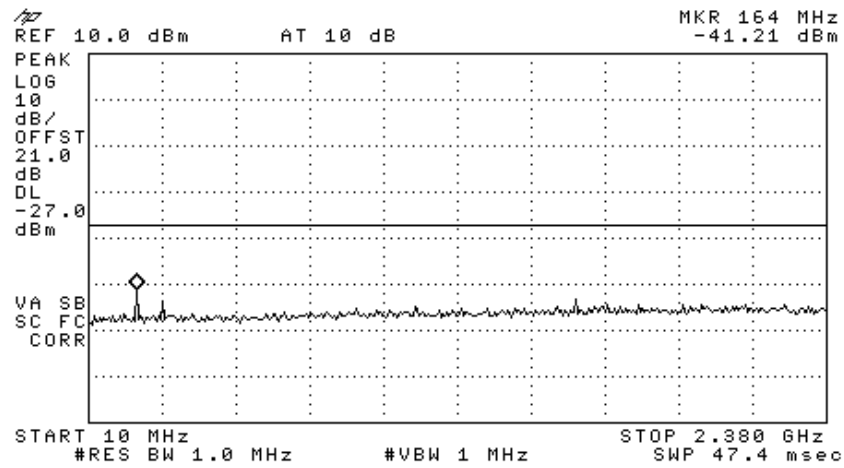


Figure 102 —5745 MHz 64QAM

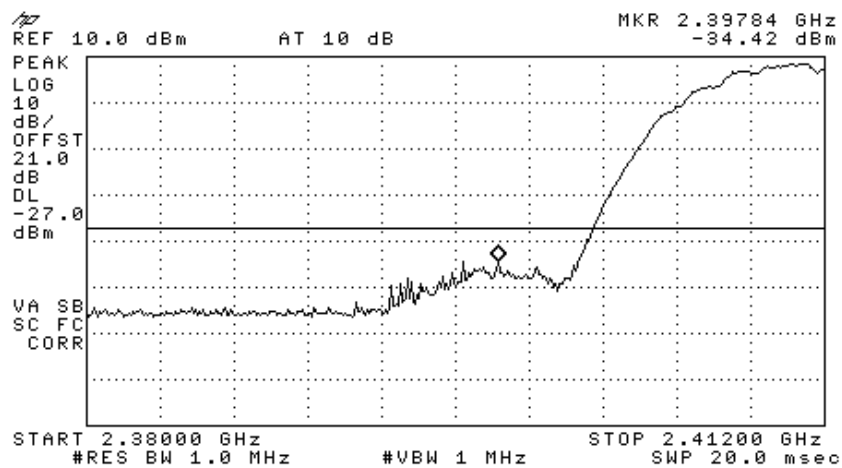


Figure 103 —5745 MHz 64QAM

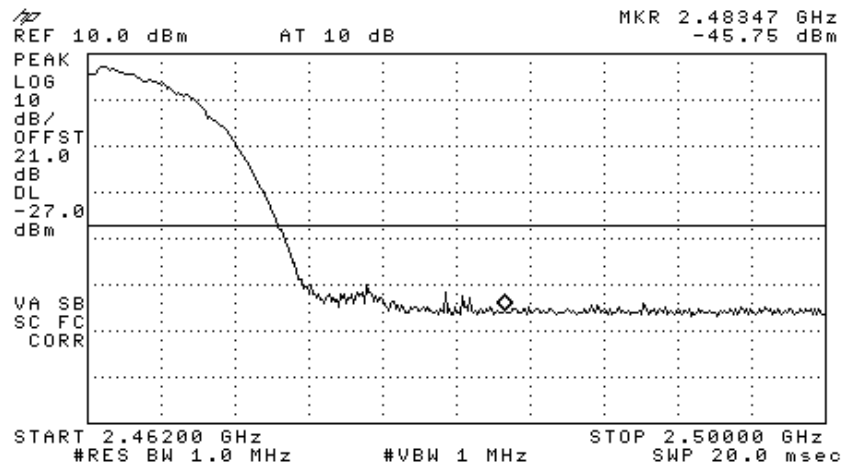


Figure 104 —5745 MHz 64QAM

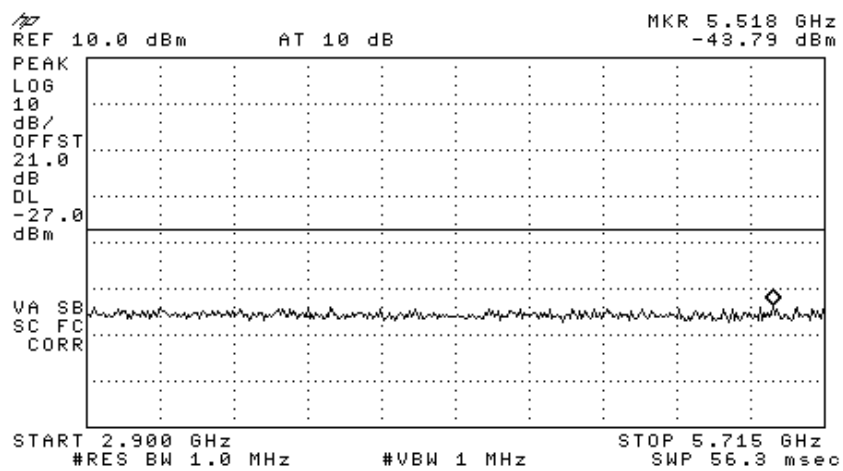


Figure 105 —5745 MHz 64QAM

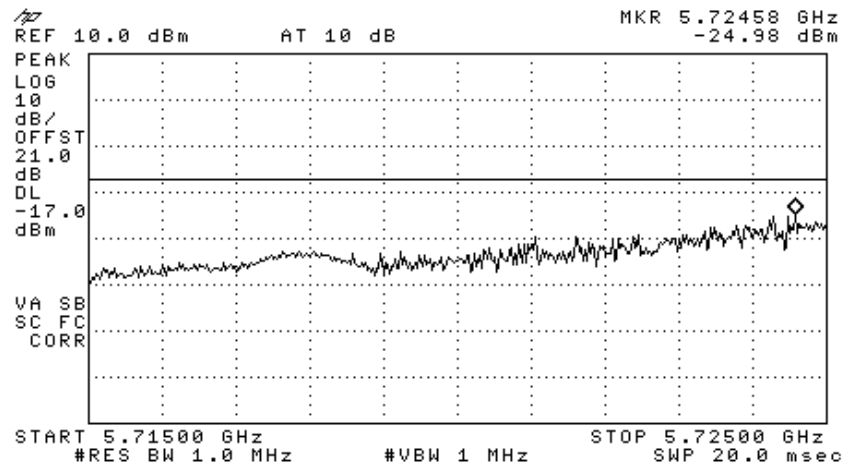


Figure 106 —5745 MHz 64QAM

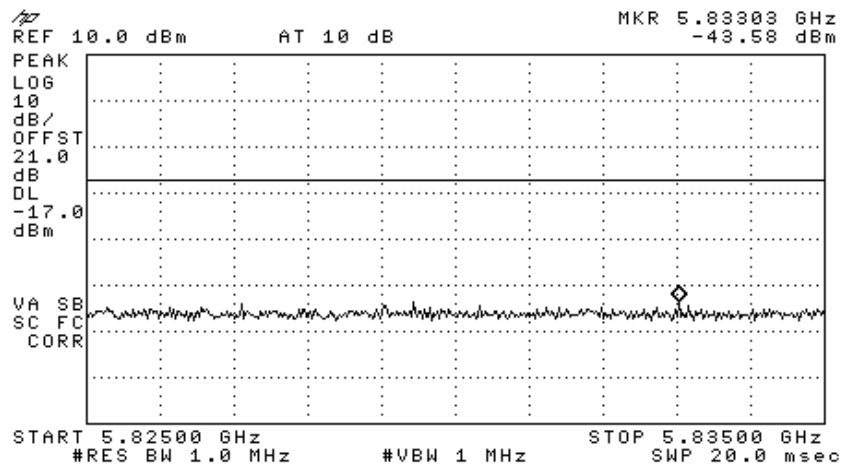


Figure 107 —5745 MHz 64QAM

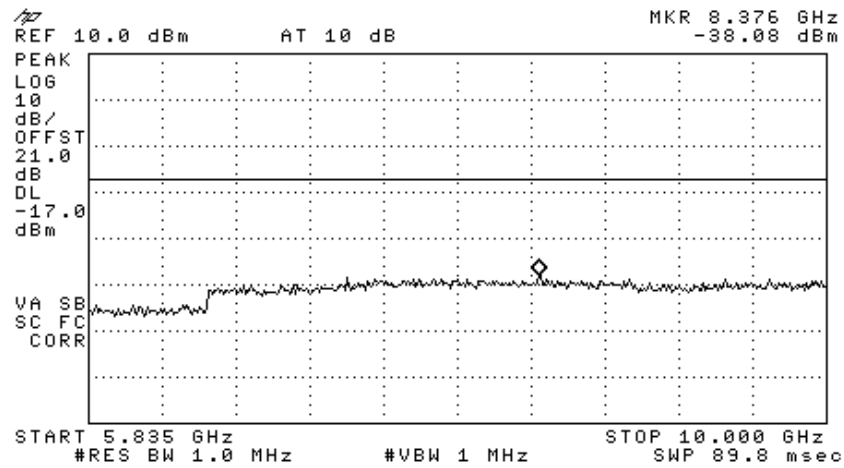


Figure 108 —5745 MHz 64QAM

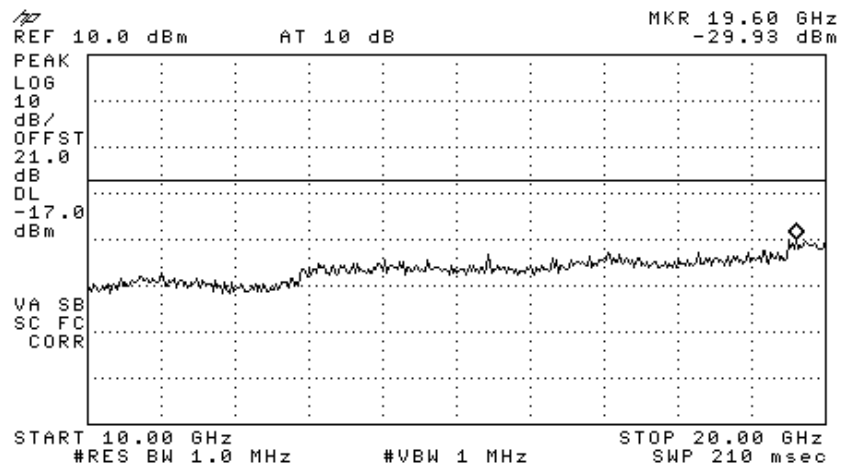


Figure 109 —5745 MHz 64QAM

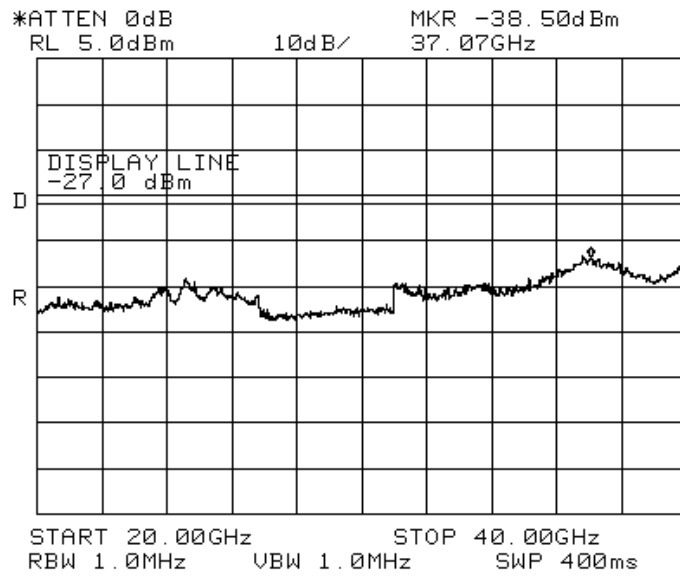


Figure 110 —5745 MHz 64QAM

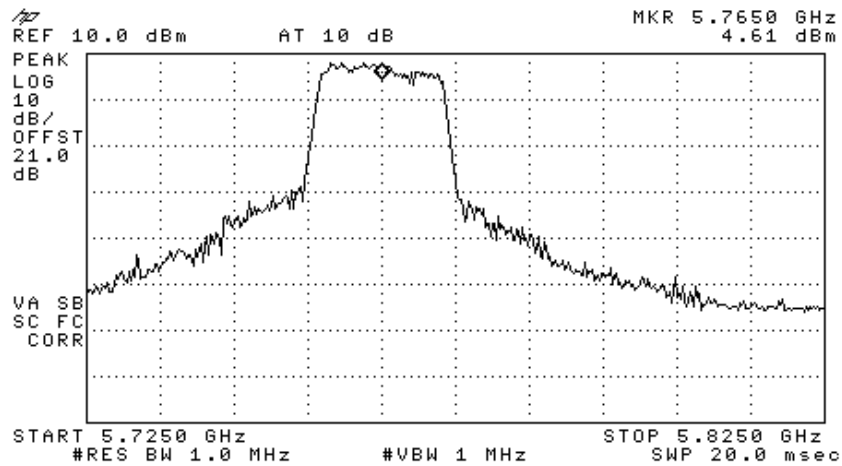


Figure 111 —5765 MHz 64QAM

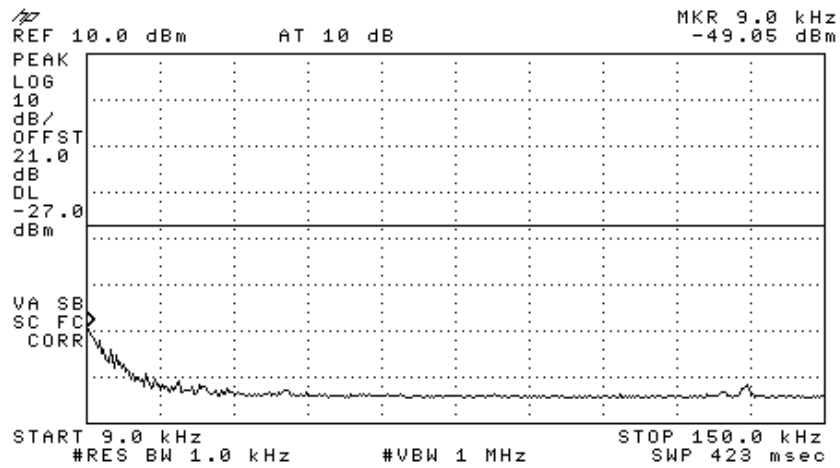


Figure 112 —5765 MHz 64QAM

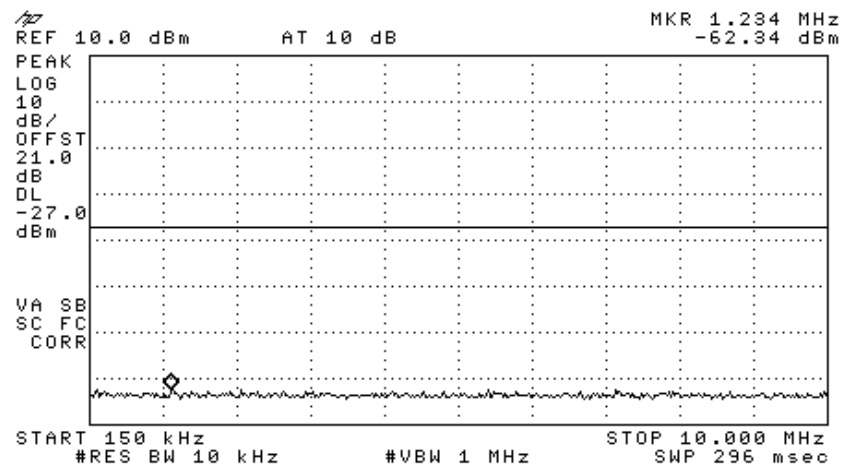


Figure 113 —5765 MHz 64QAM

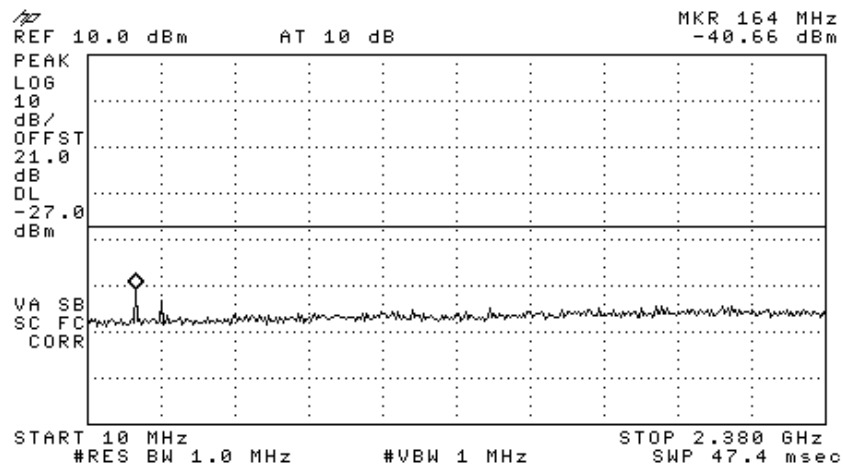


Figure 114 —5765 MHz 64QAM

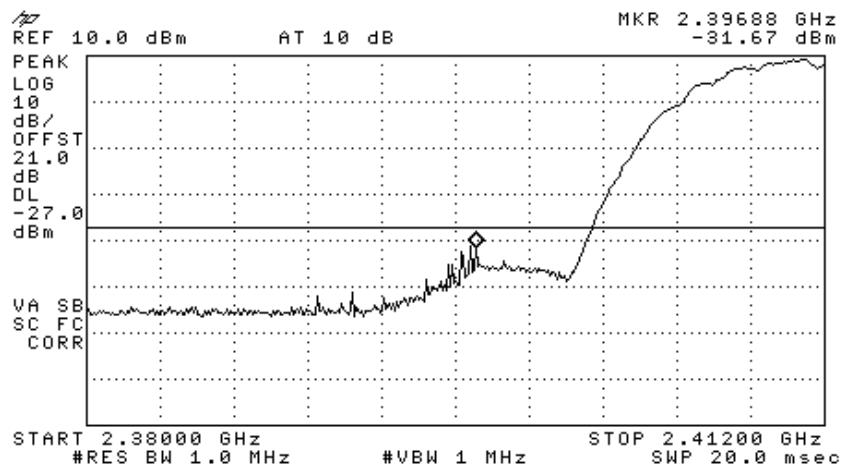


Figure 115 —5765 MHz 64QAM

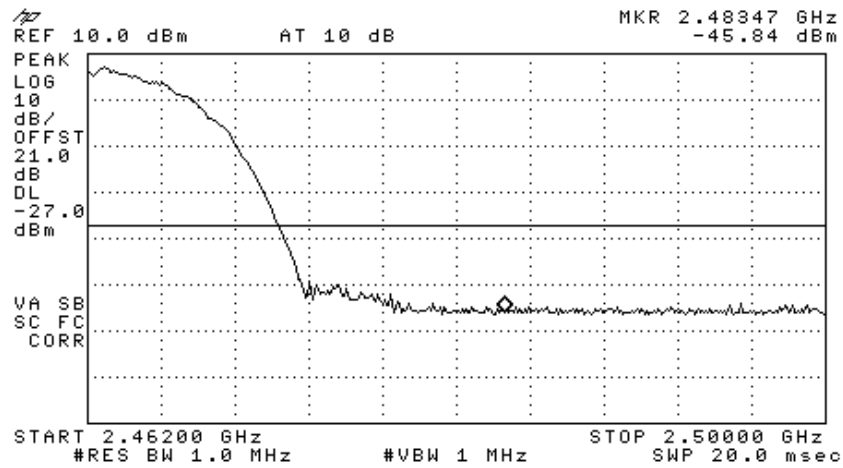


Figure 116 —5765 MHz 64QAM

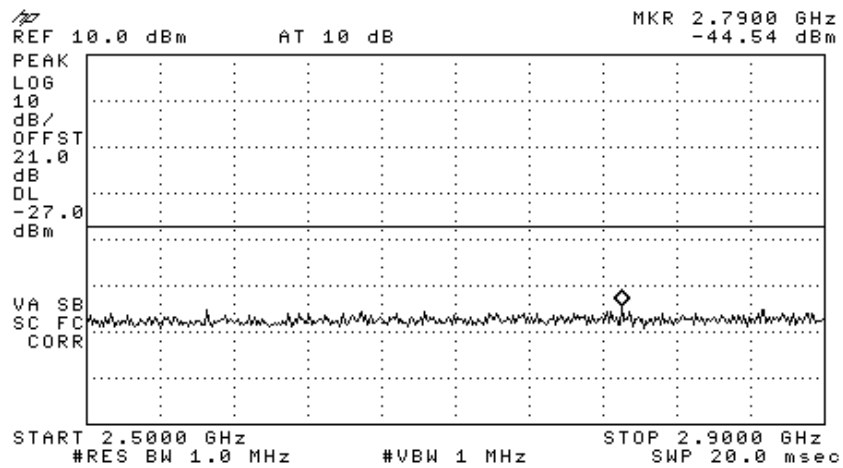


Figure 117 —5765 MHz 64QAM

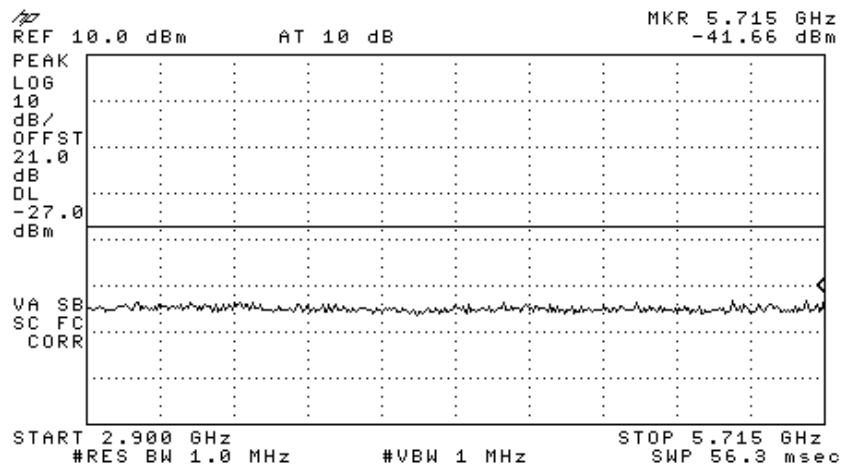


Figure 118 —5765 MHz 64QAM

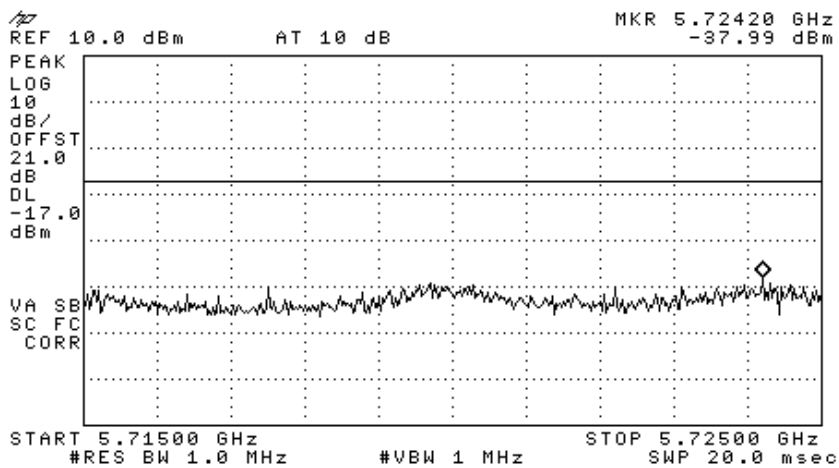


Figure 119 —5765 MHz 64QAM

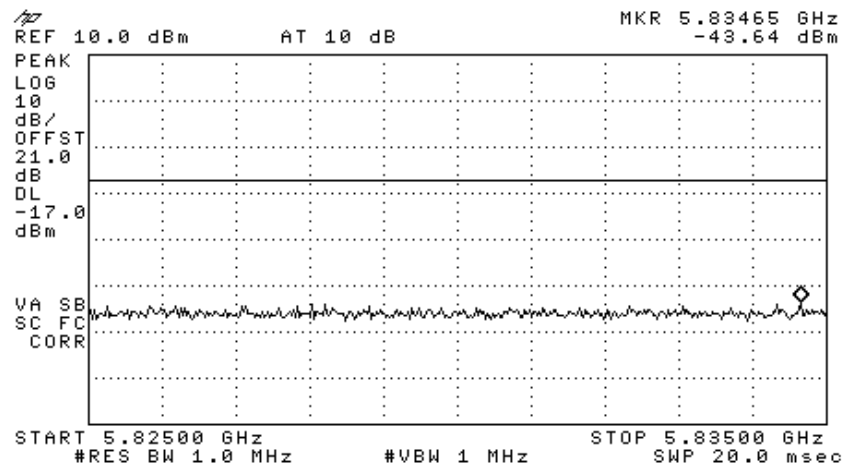


Figure 120 —5765 MHz 64QAM

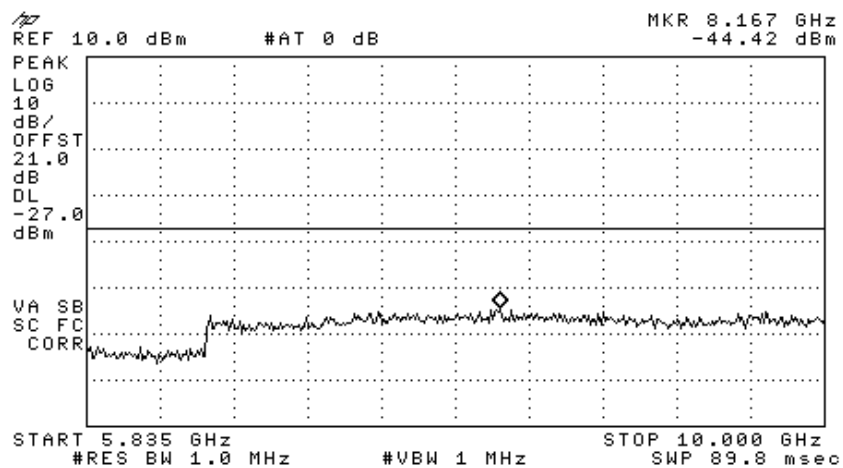


Figure 121 —5765 MHz 64QAM

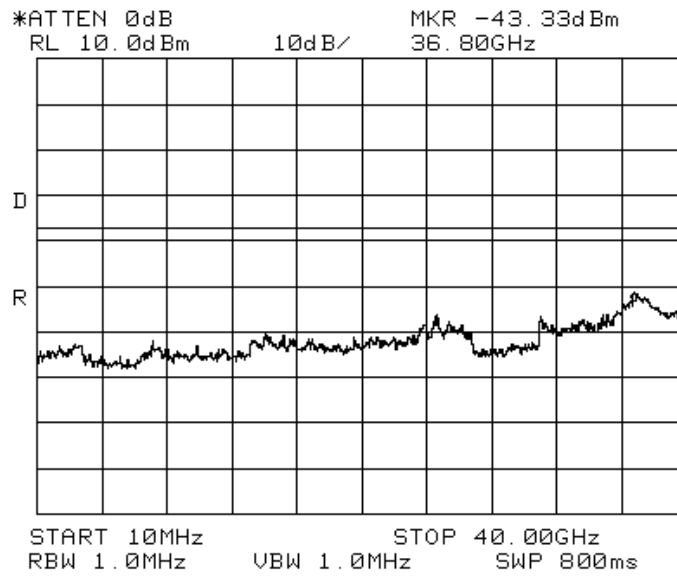


Figure 122 —5765 MHz 64QAM

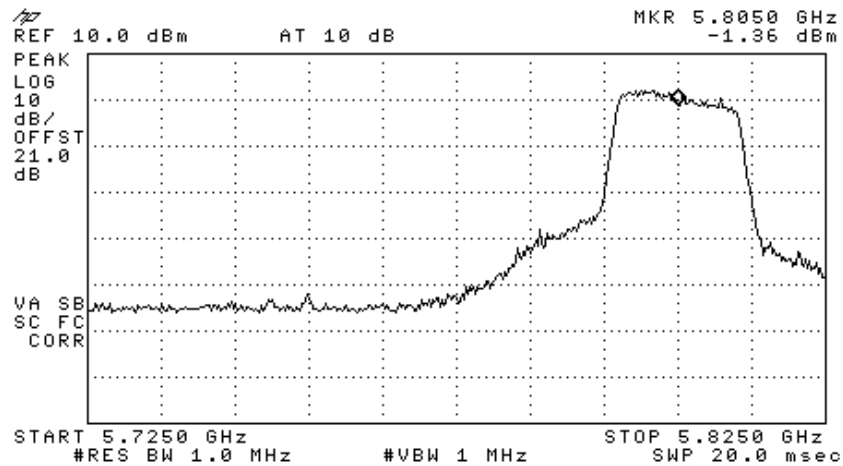


Figure 123 —5805 MHz 64QAM

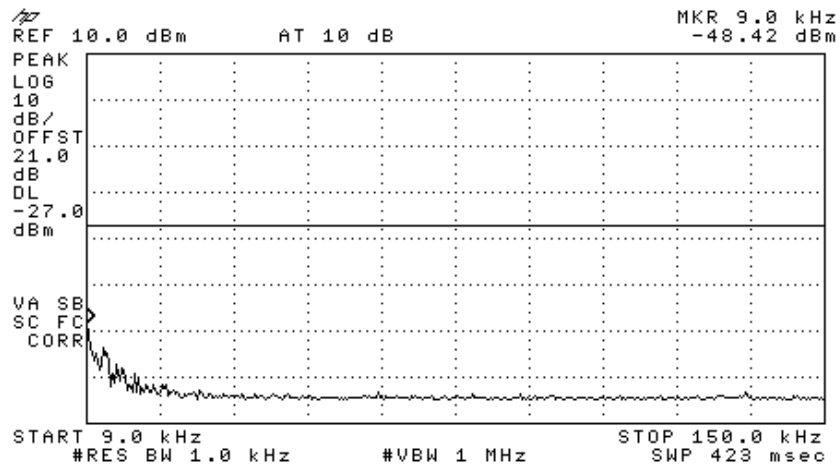


Figure 124 —5805 MHz 64QAM

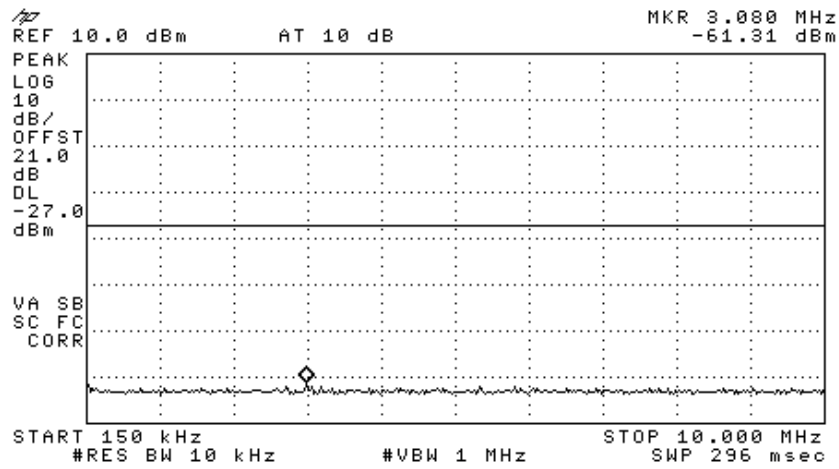


Figure 125 —5805 MHz 64QAM

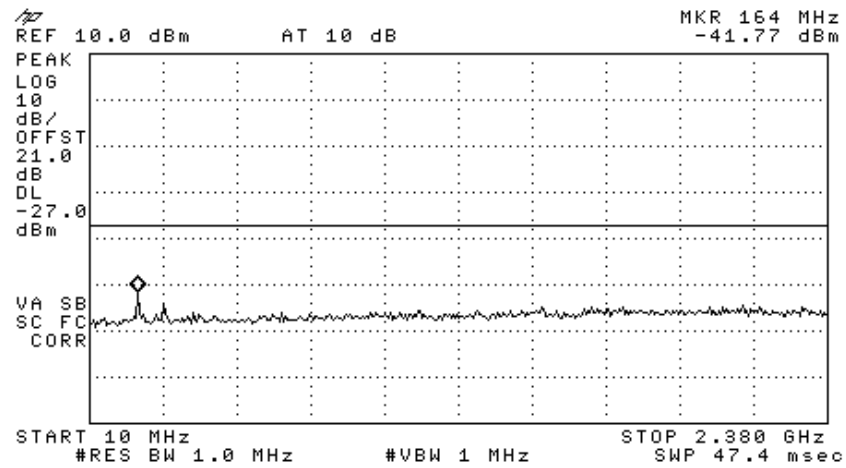


Figure 126 —5805 MHz 64QAM

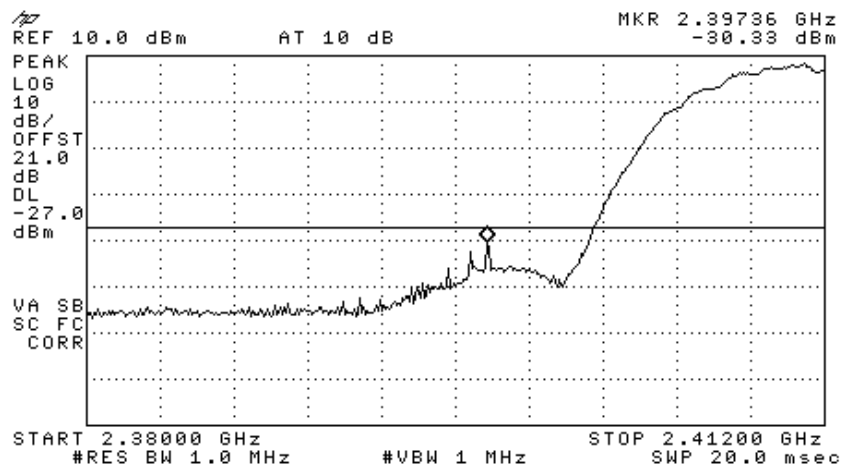


Figure 127 —5805 MHz 64QAM

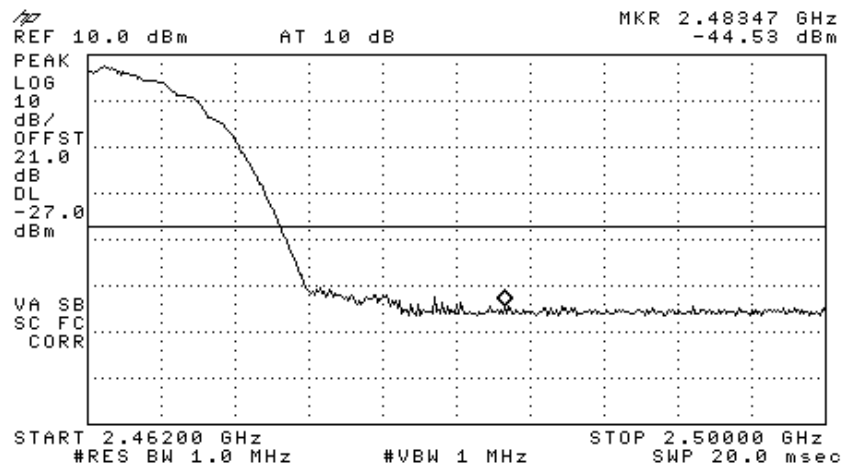


Figure 128 —5805 MHz 64QAM

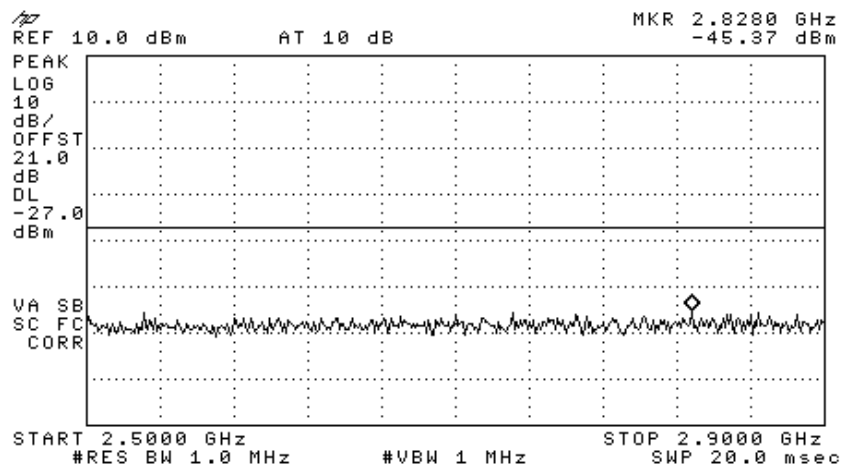


Figure 129 —5805 MHz 64QAM

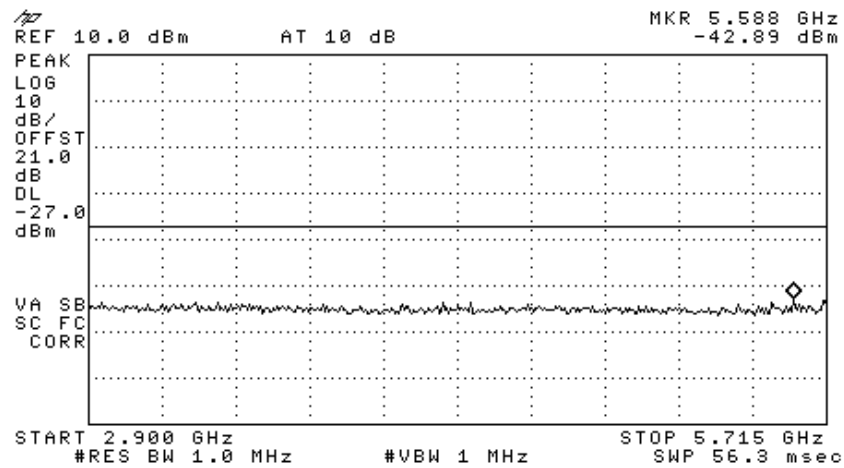


Figure 130 —5805 MHz 64QAM

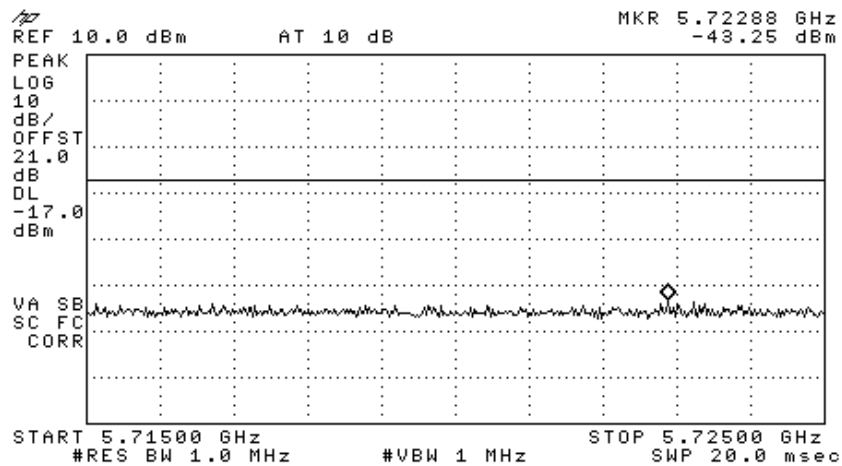


Figure 131 —5805 MHz 64QAM

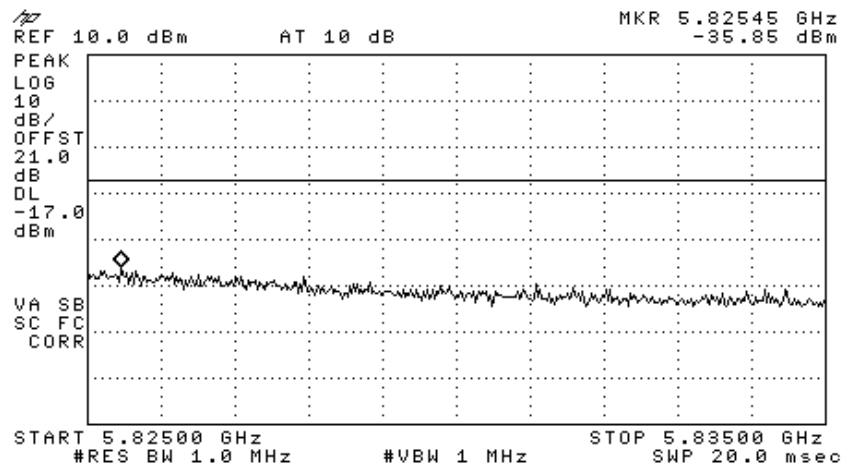


Figure 132 —5805 MHz 64QAM

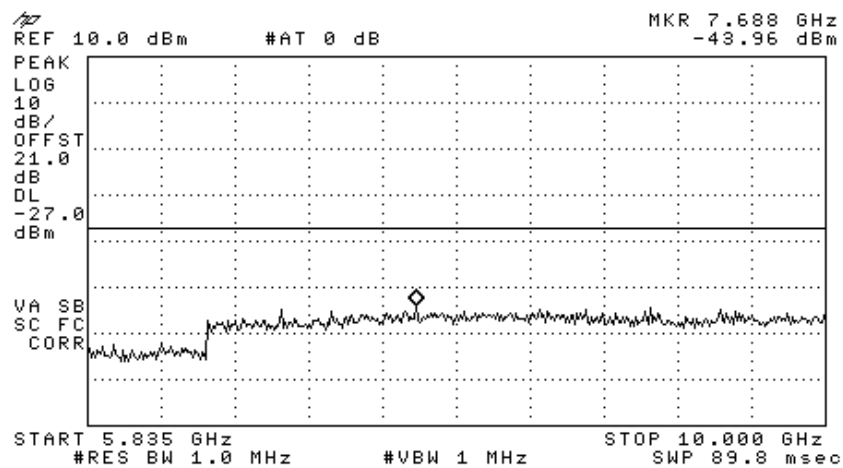


Figure 133 —5805 MHz 64QAM

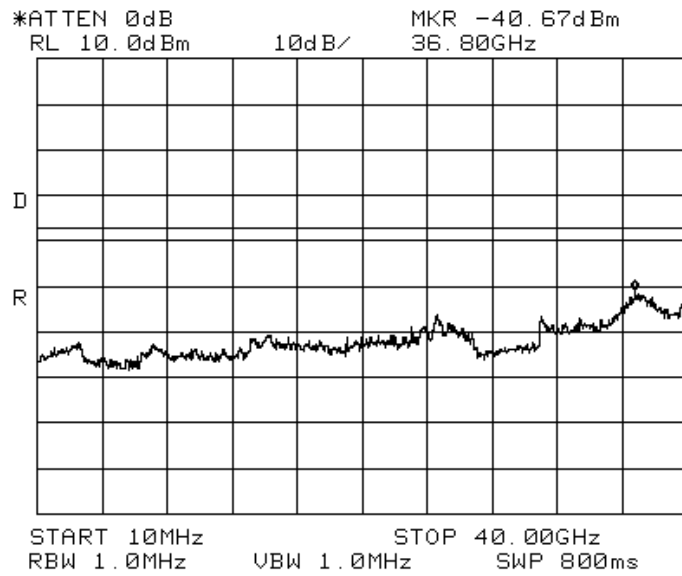


Figure 134 —5805 MHz 64QAM

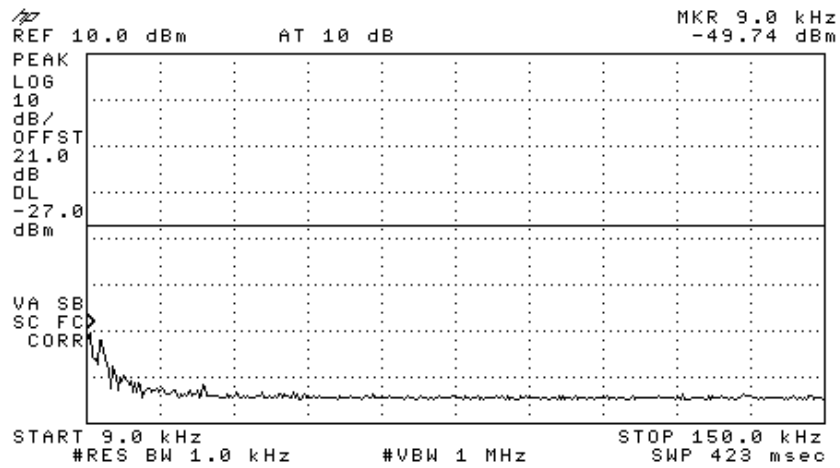


Figure 135 —5180 MHz BPSK

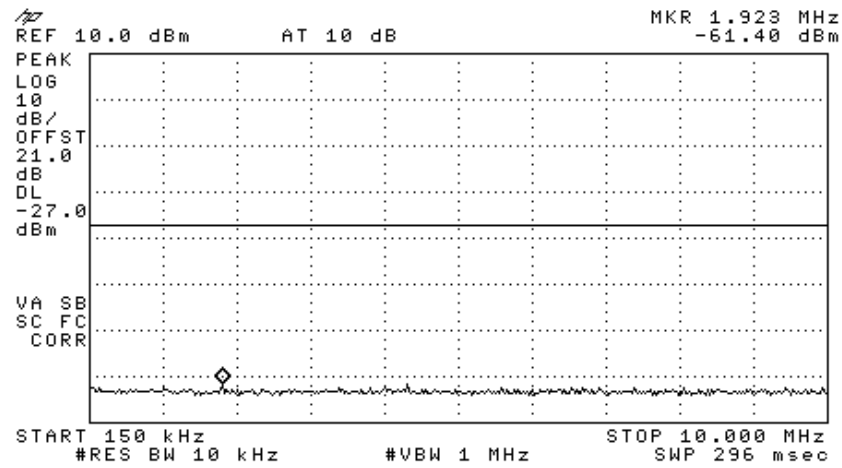


Figure 136 —5180 MHz BPSK

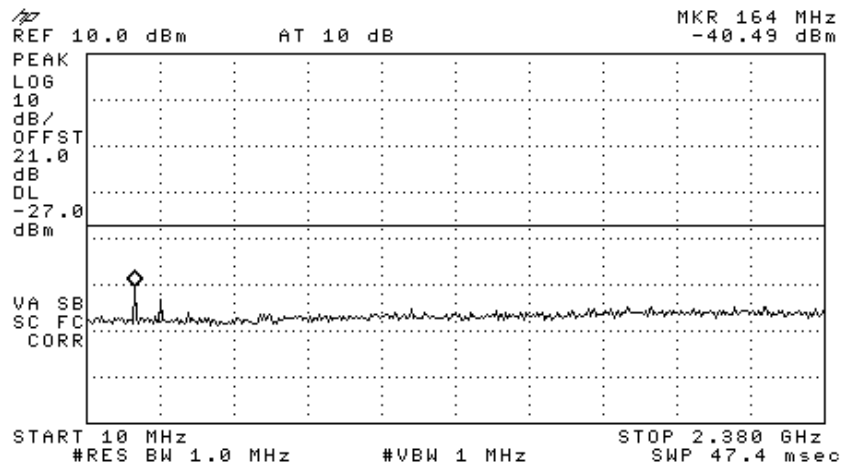


Figure 137 —5180 MHz BPSK

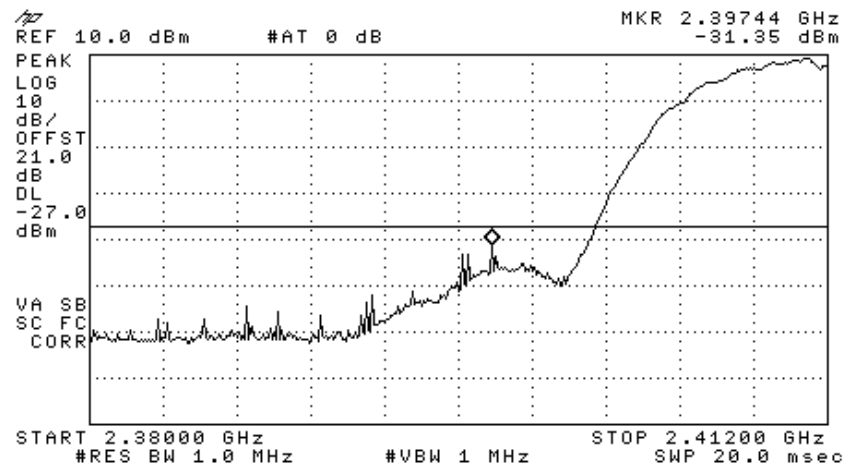


Figure 138 —5180 MHz BPSK

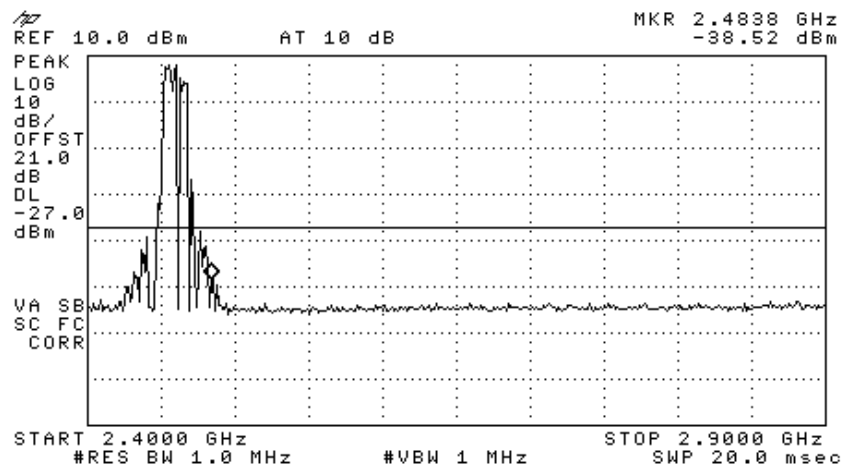


Figure 139 —5180 MHz BPSK

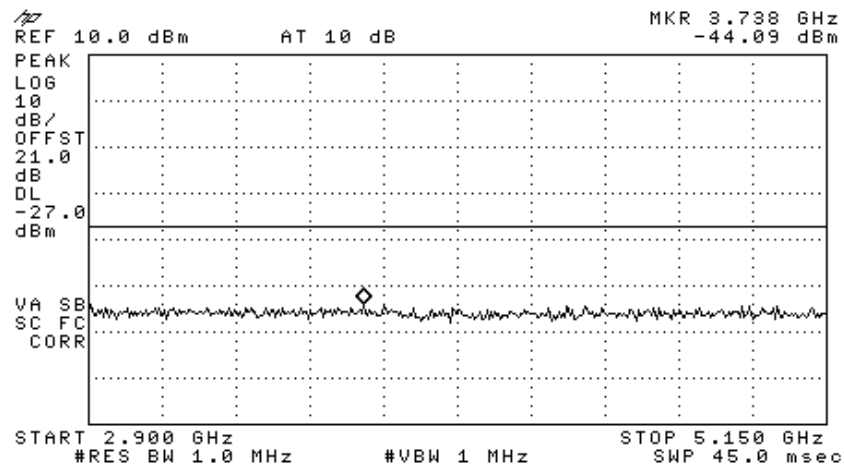


Figure 140 —5180 MHz BPSK

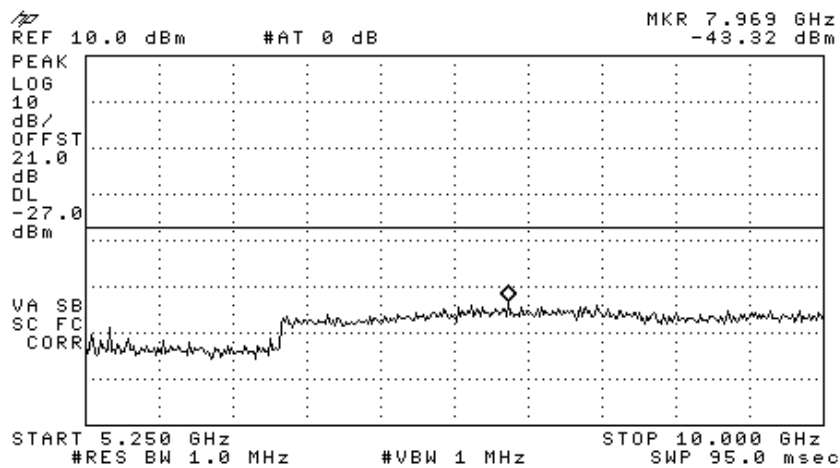


Figure 141 —5180 MHz BPSK

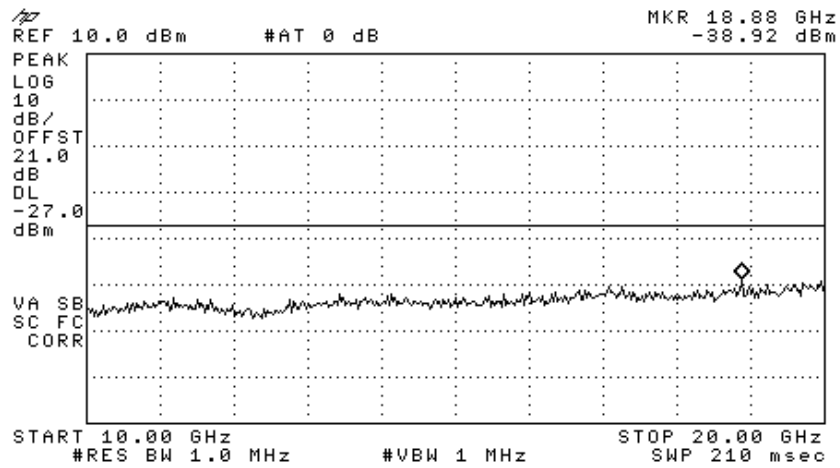


Figure 142 —5180 MHz BPSK

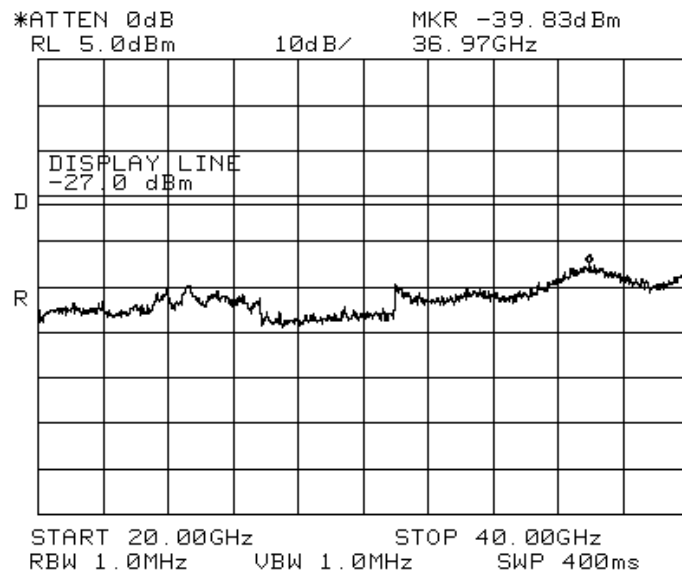


Figure 143 —5180 MHz BPSK

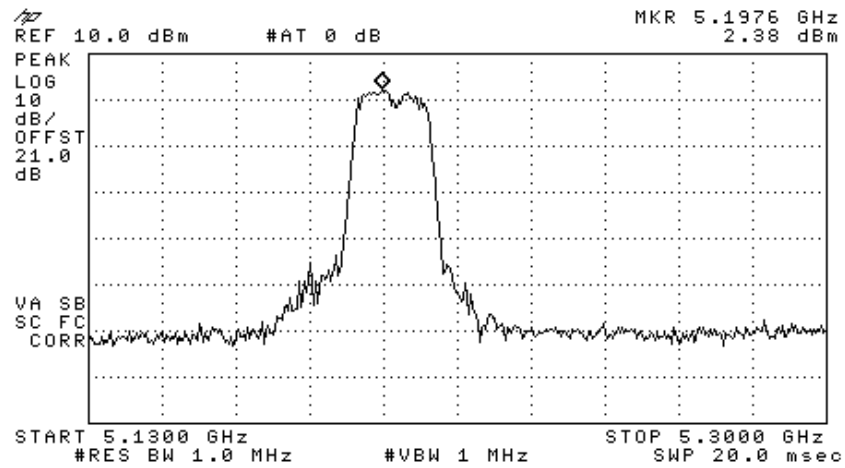


Figure 144 —5200 MHz BPSK

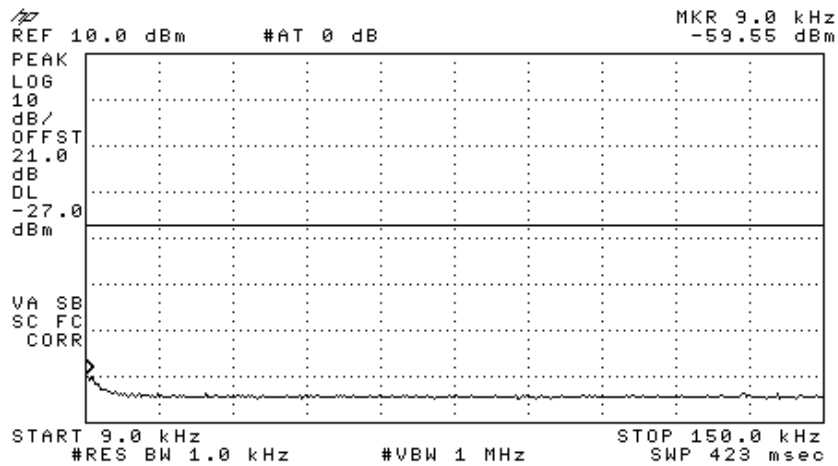


Figure 145 —5200 MHz BPSK

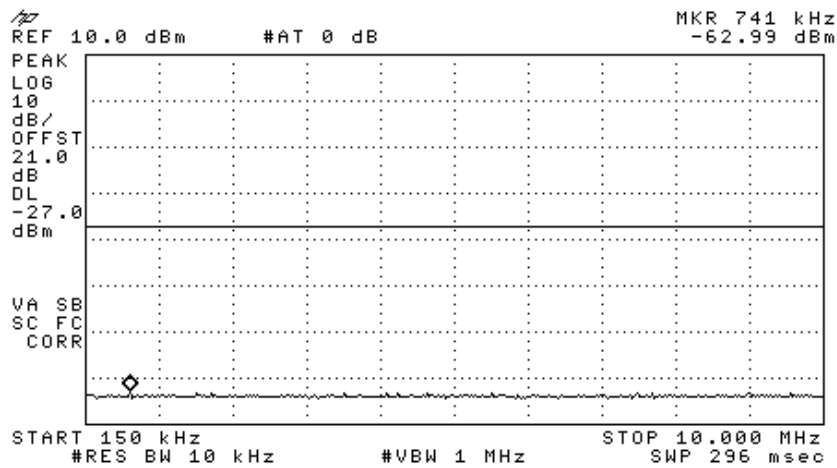


Figure 146 —5200 MHz BPSK

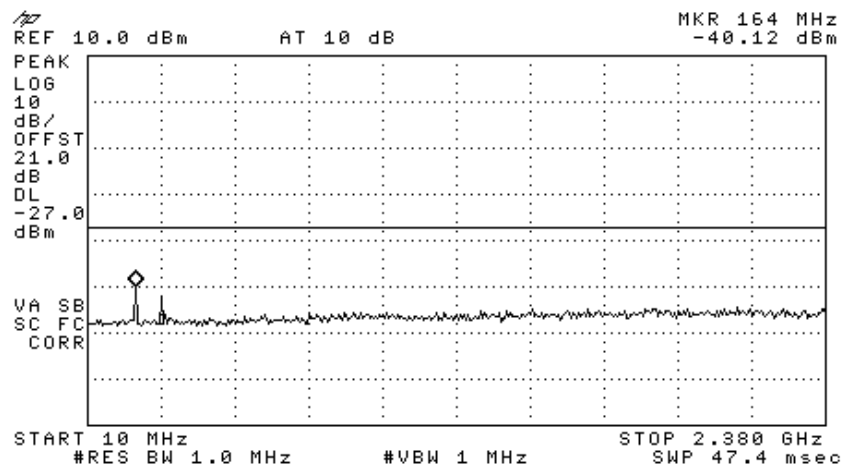


Figure 147 —5200 MHz BPSK

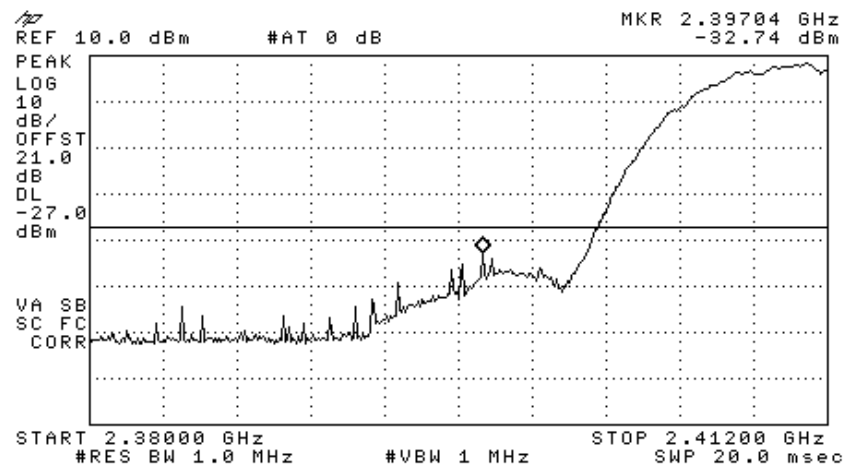


Figure 148 —5200 MHz BPSK

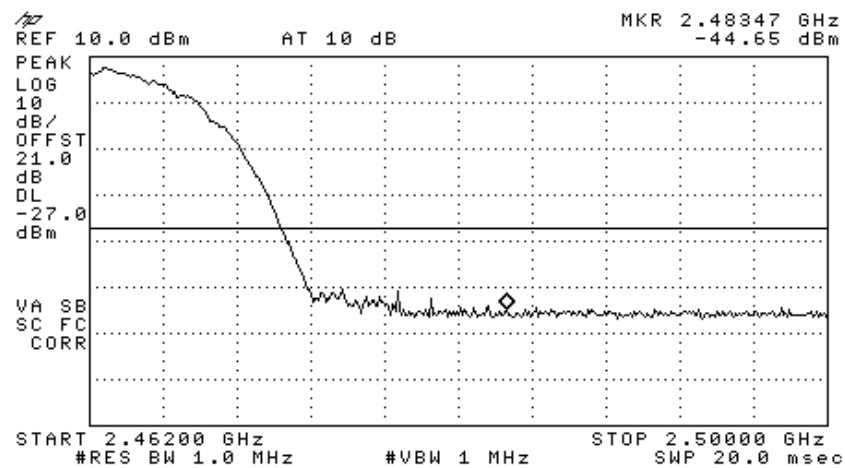


Figure 149 —5200 MHz BPSK

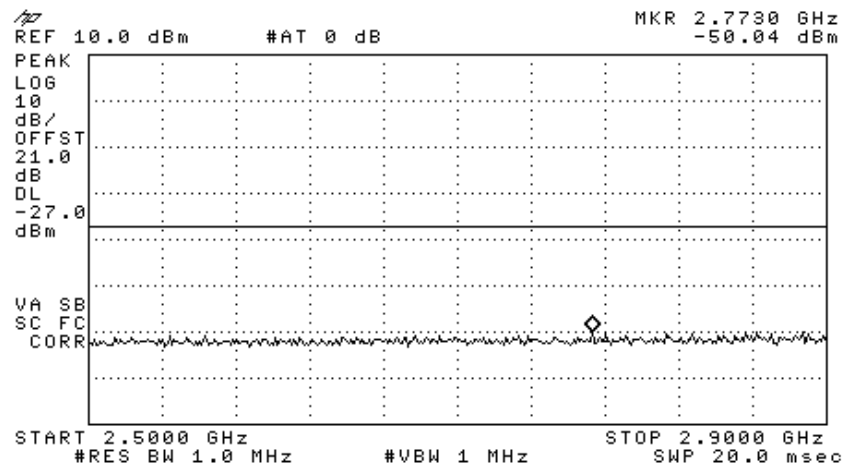


Figure 150 —5200 MHz BPSK

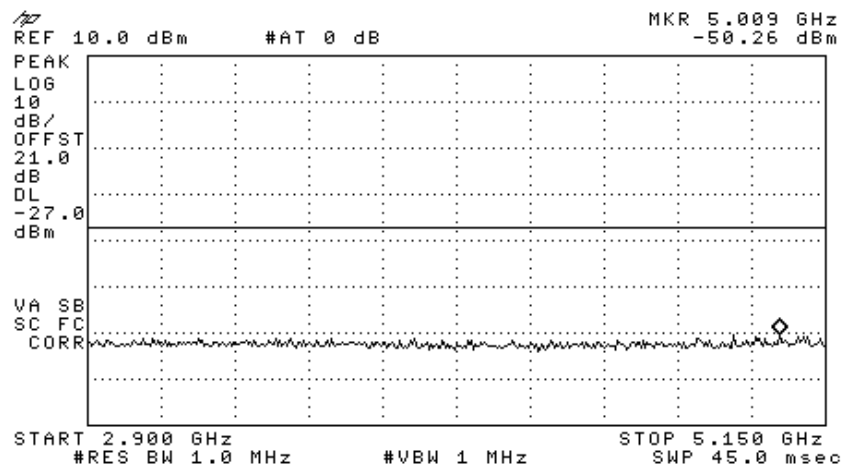


Figure 151 —5200 MHz BPSK

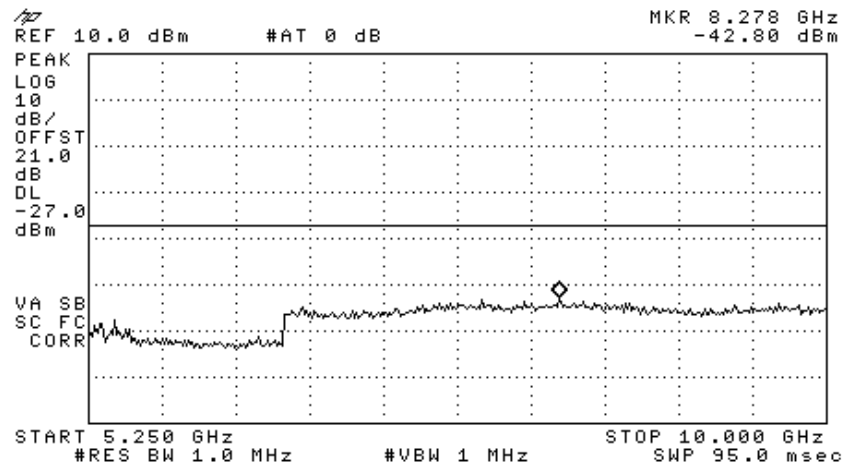


Figure 152 —5200 MHz BPSK

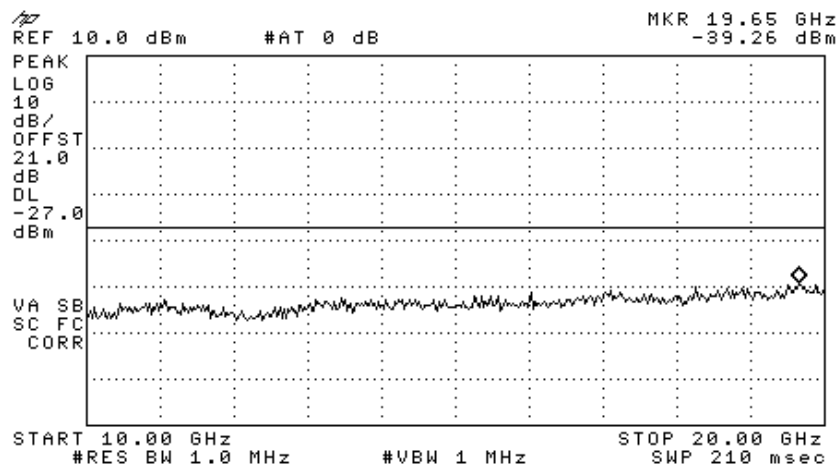


Figure 153 —5200 MHz BPSK

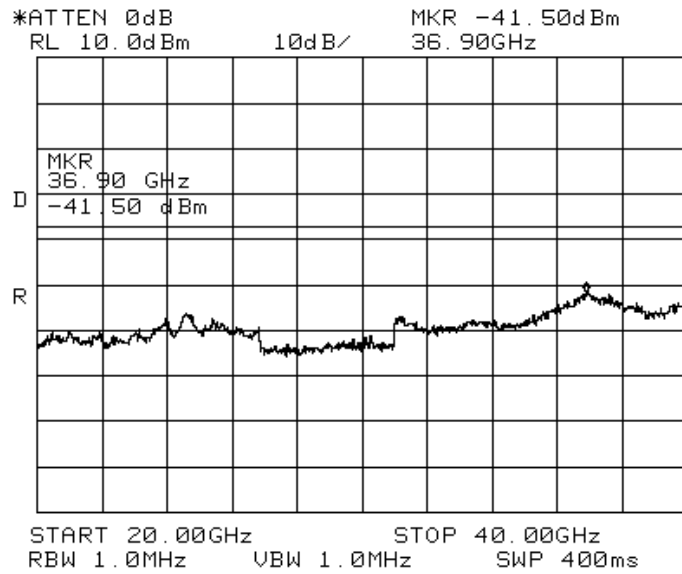


Figure 154 —5200 MHz BPSK

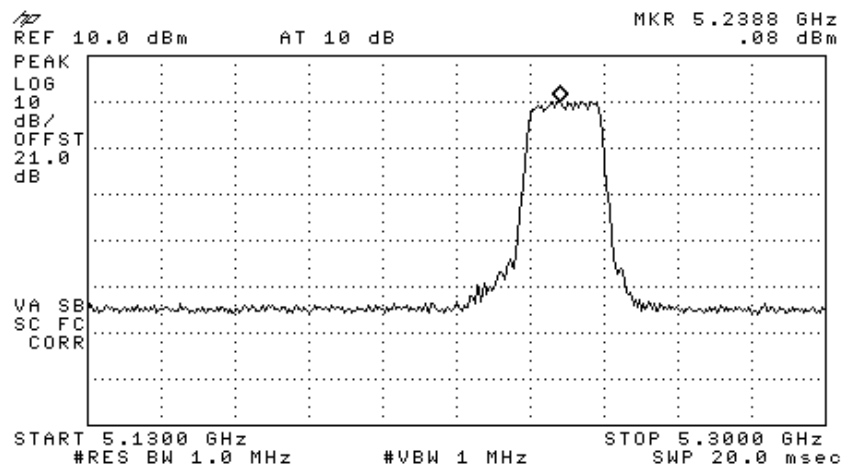


Figure 155 —5240 MHz BPSK

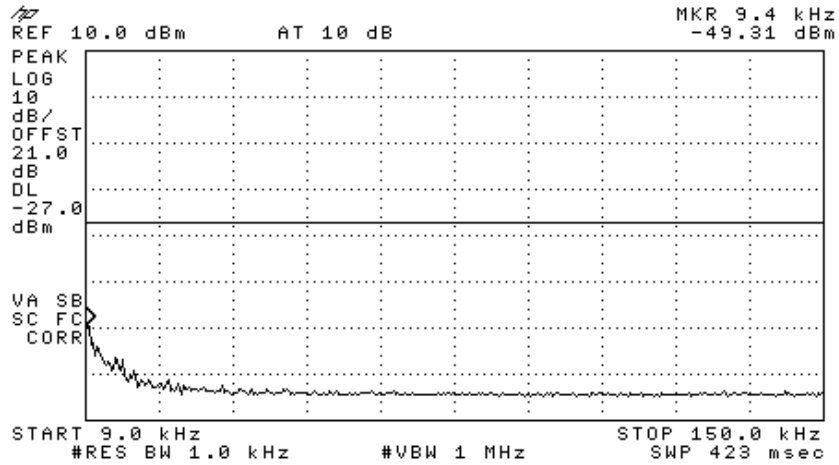


Figure 156 —5240 MHz BPSK

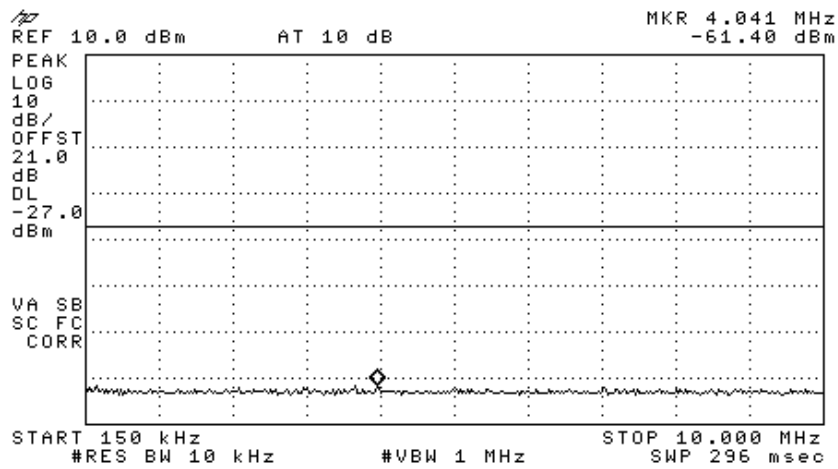


Figure 157 —5240 MHz BPSK

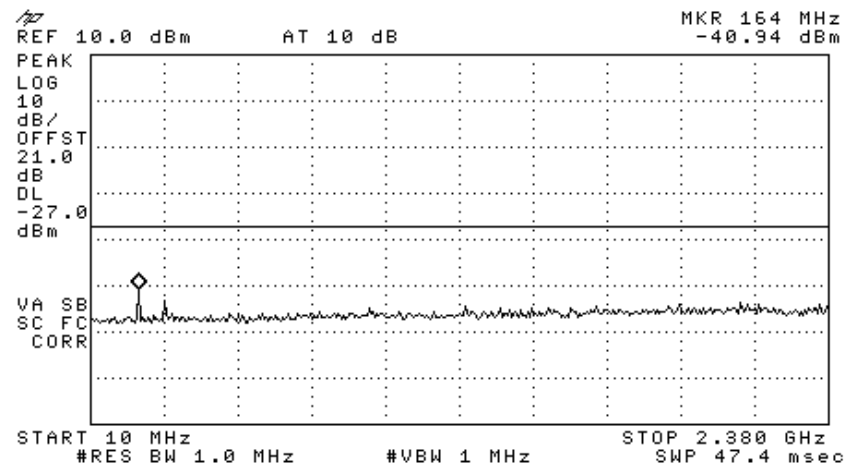


Figure 158 —5240 MHz BPSK

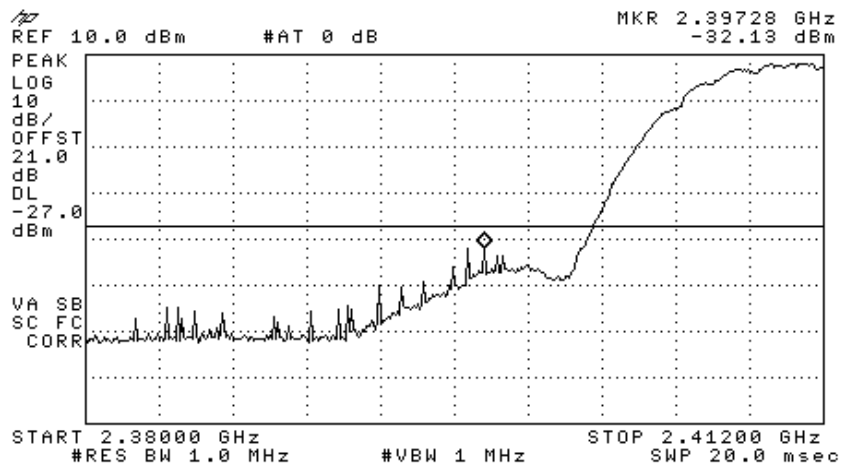


Figure 159 —5240 MHz BPSK

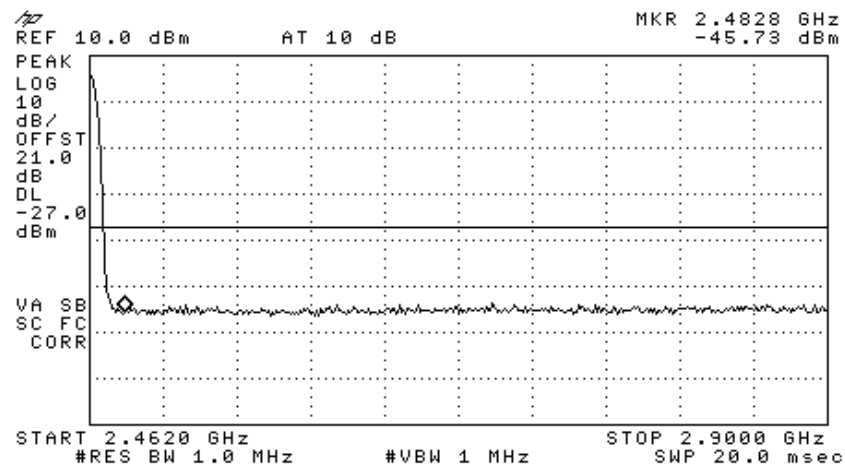


Figure 160 —5240 MHz BPSK

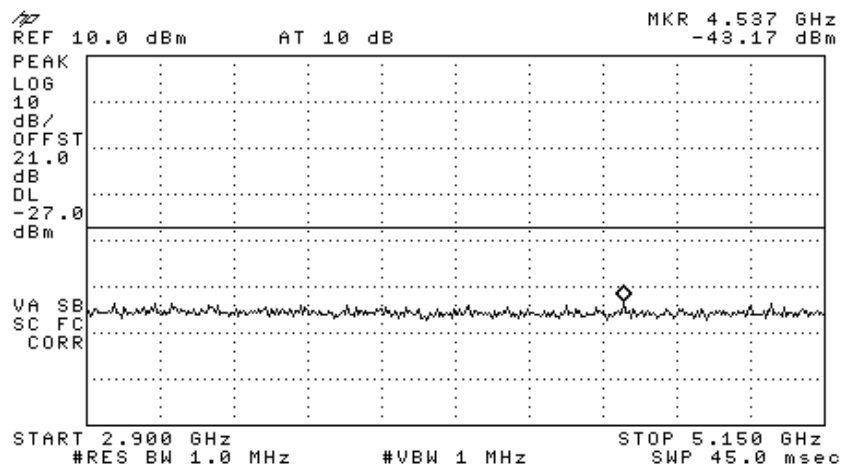


Figure 161 —5240 MHz BPSK

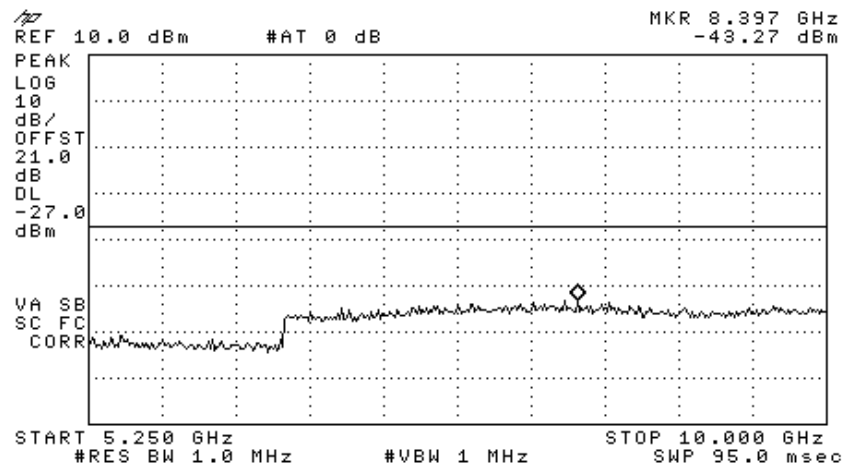


Figure 162 —5240 MHz BPSK

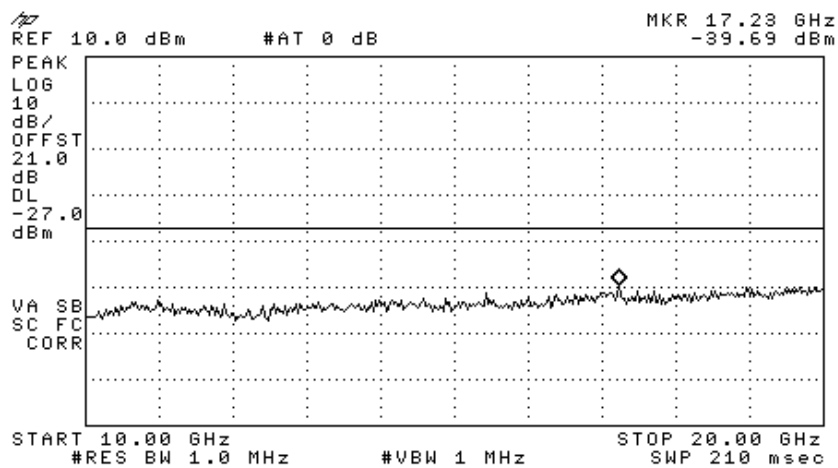


Figure 163 —5240 MHz BPSK

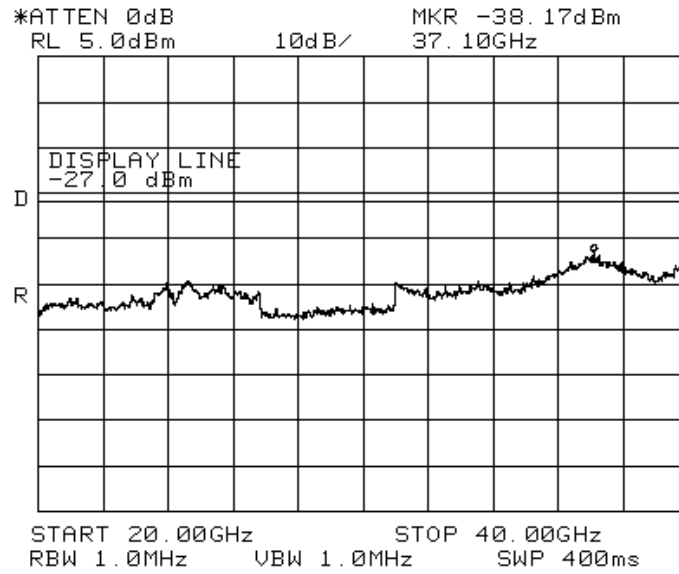


Figure 164 —5240 MHz BPSK

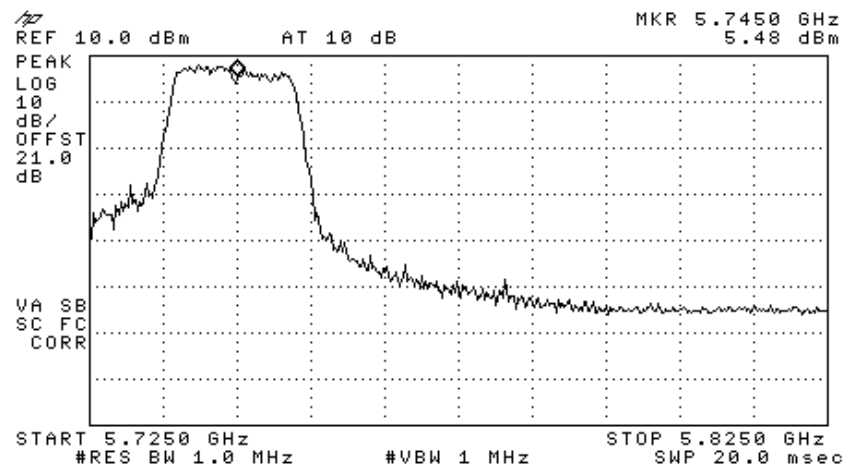


Figure 165 —5745 MHz BPSK

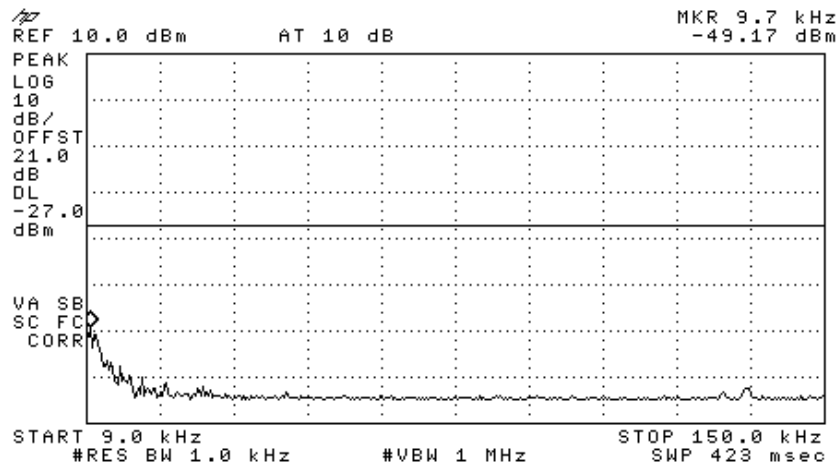


Figure 166 —5745 MHz BPSK

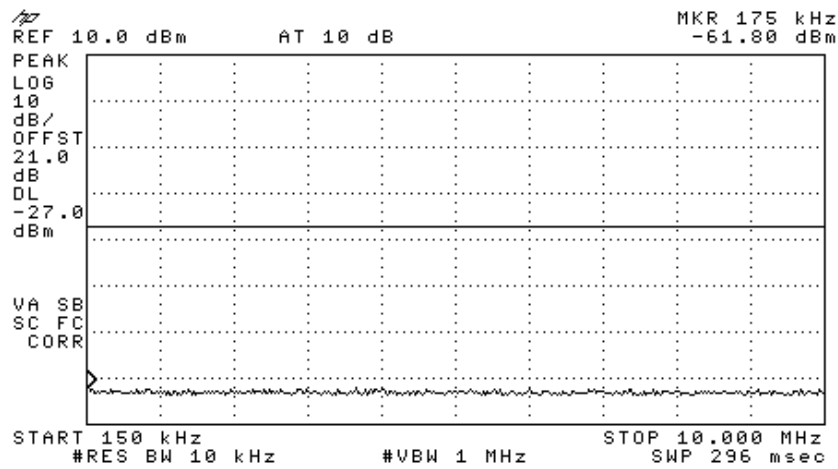


Figure 167 —5745 MHz BPSK

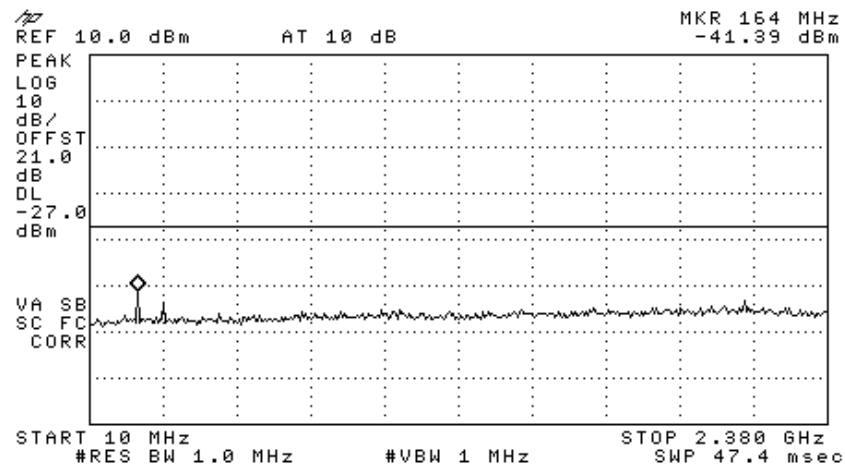


Figure 168 —5745 MHz BPSK

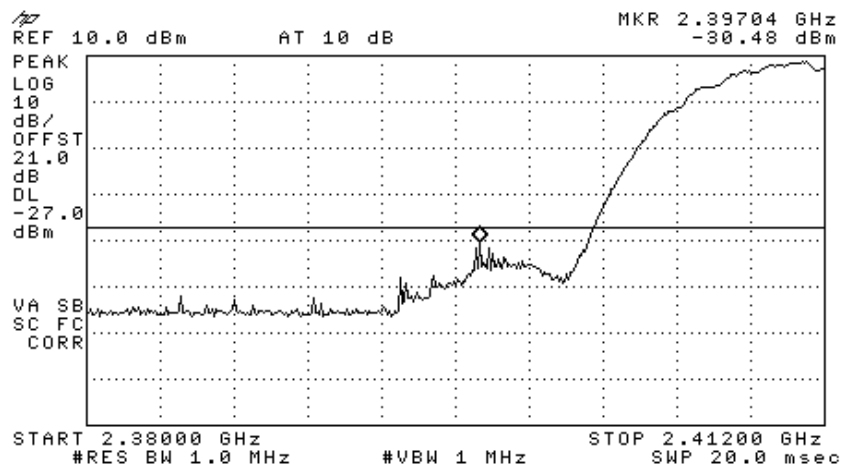


Figure 169 —5745 MHz BPSK

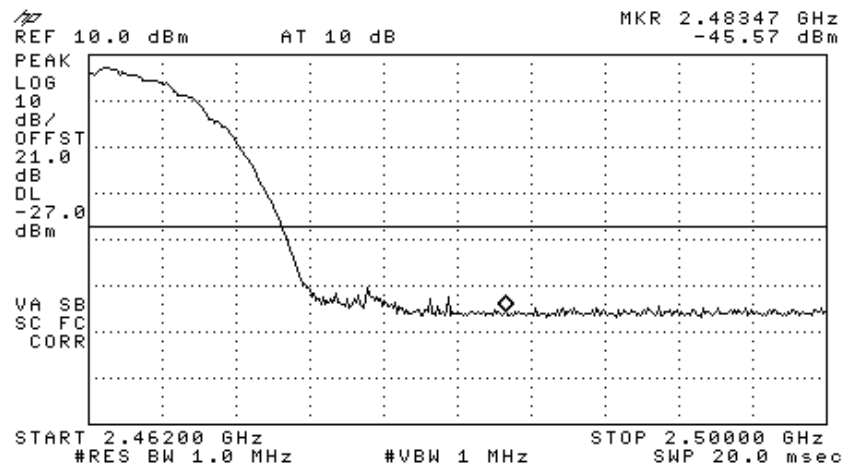


Figure 170 —5745 MHz BPSK

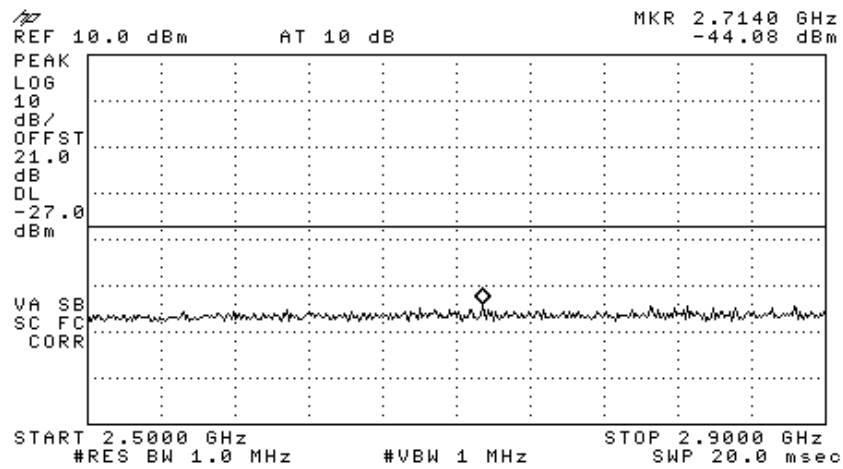


Figure 171 —5745 MHz BPSK

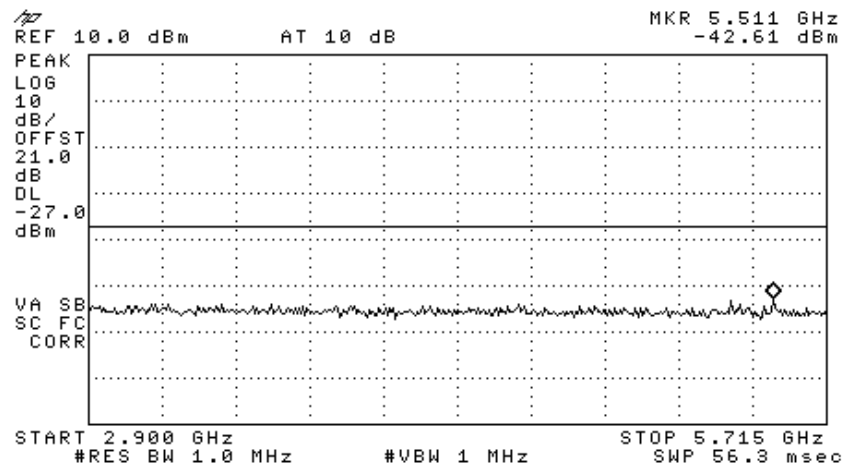


Figure 172 —5745 MHz BPSK

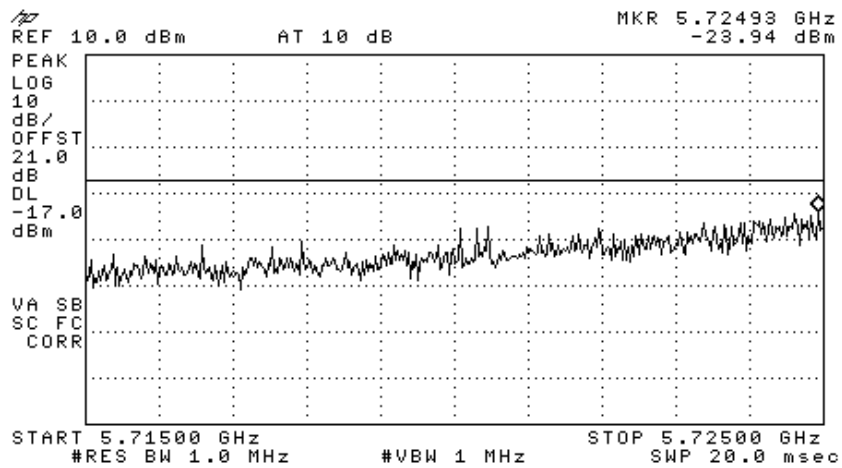


Figure 173 —5745 MHz BPSK

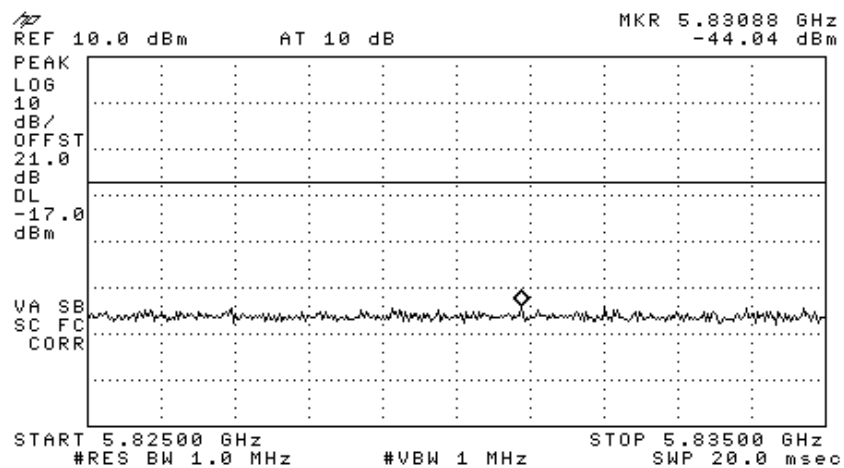


Figure 174 —5745 MHz BPSK

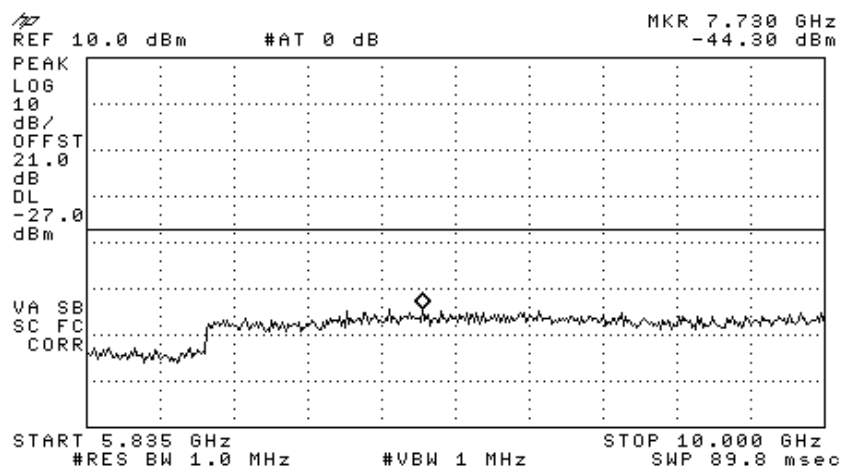


Figure 175 —5745 MHz BPSK

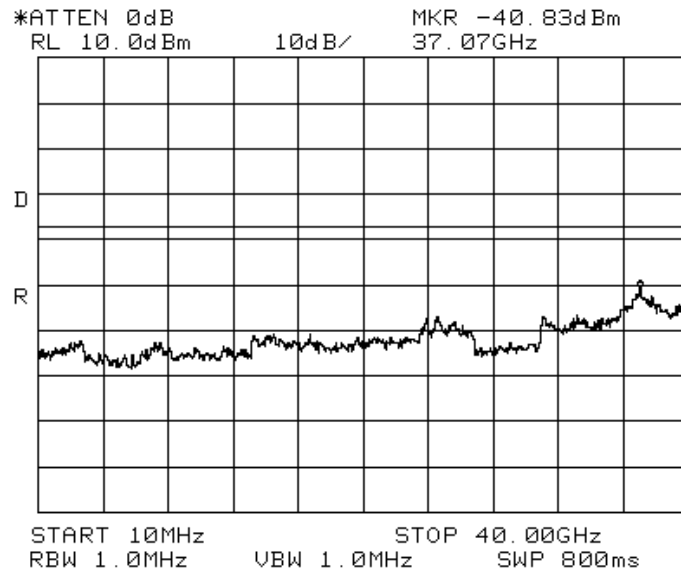


Figure 176 —5745 MHz BPSK

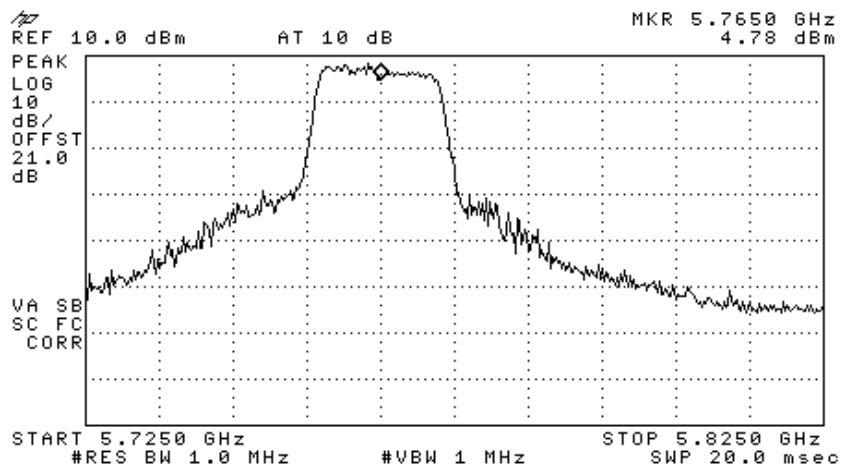


Figure 177 —5765 MHz BPSK

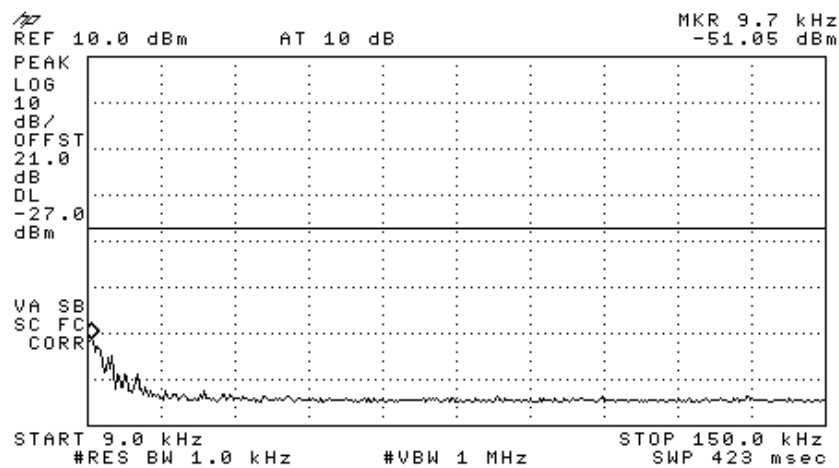


Figure 178 —5765 MHz BPSK

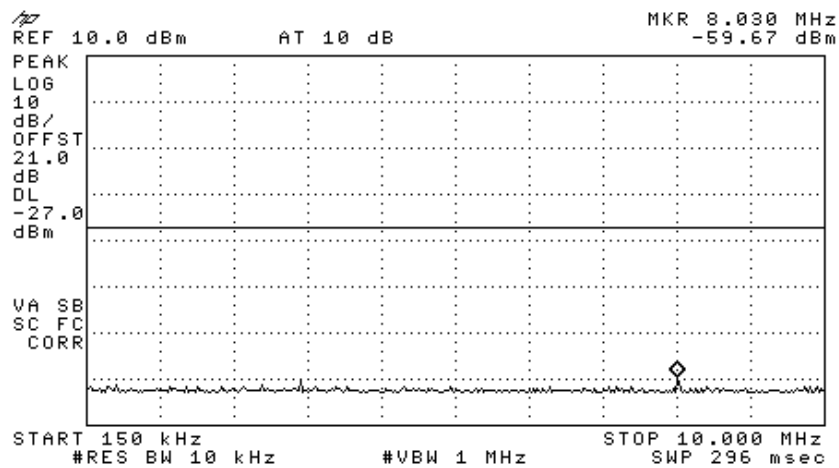


Figure 179 —5765 MHz BPSK

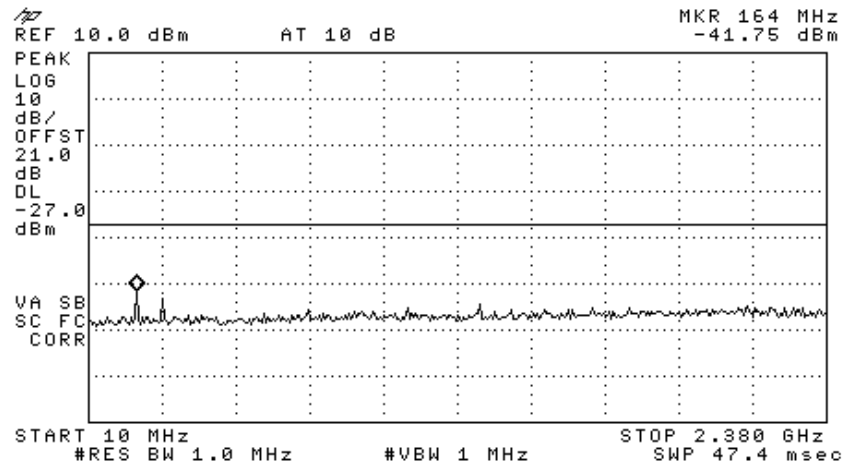


Figure 180 —5765 MHz BPSK

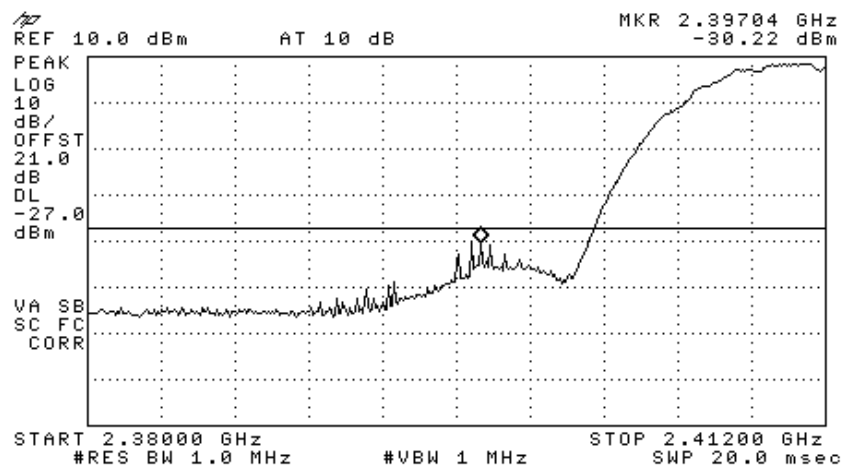


Figure 181 —5765 MHz BPSK

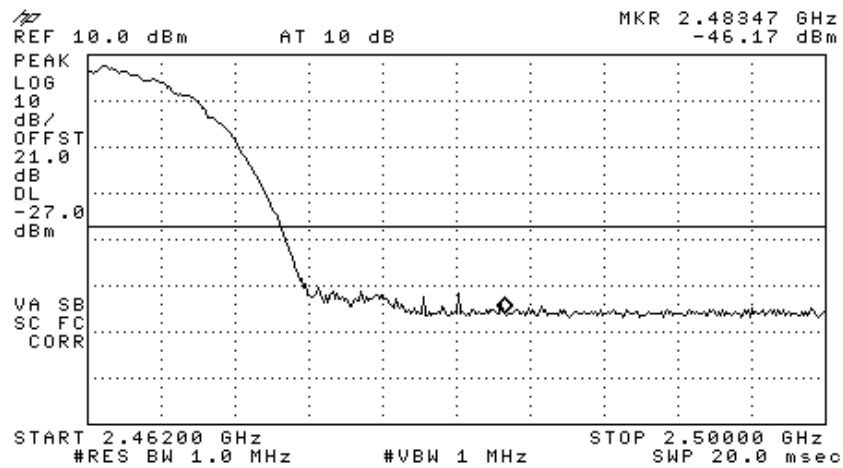


Figure 182 —5765 MHz BPSK

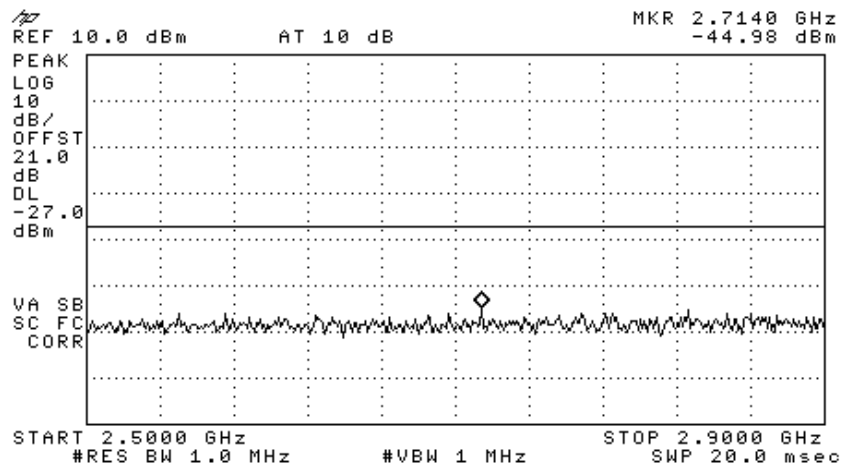


Figure 183 —5765 MHz BPSK

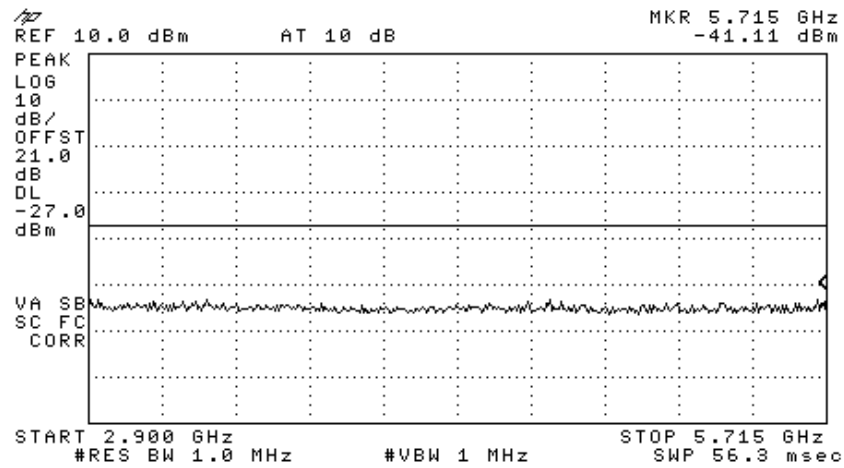


Figure 184 —5765 MHz BPSK

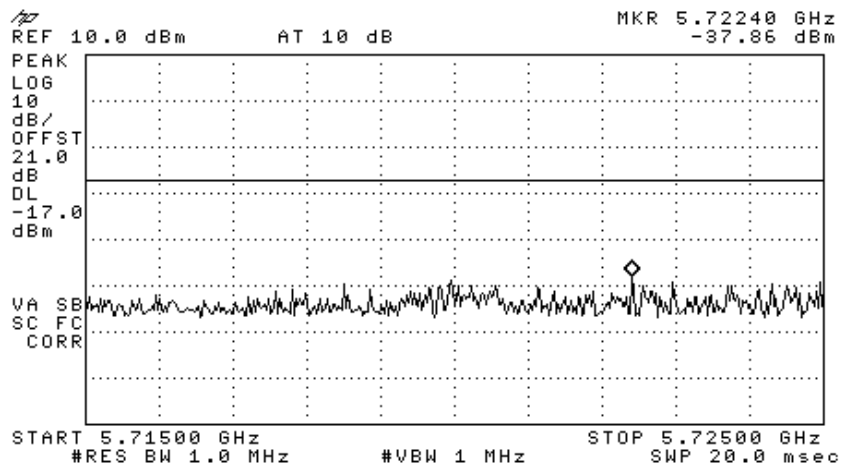


Figure 185 —5765 MHz BPSK

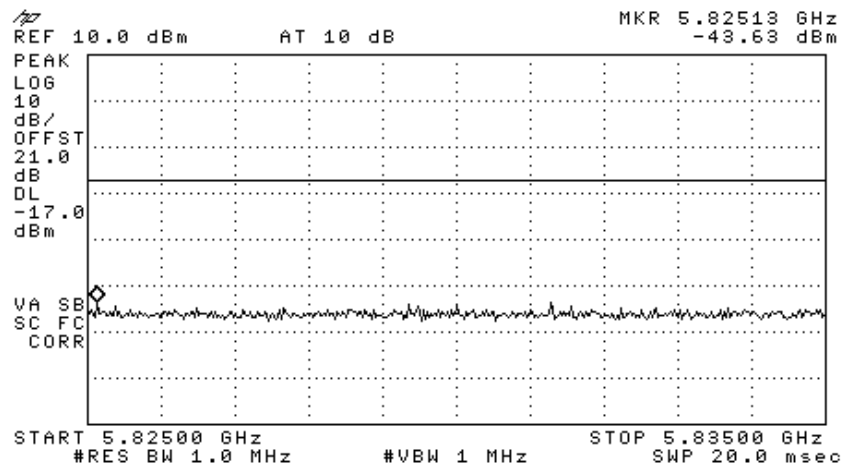


Figure 186 —5765 MHz BPSK

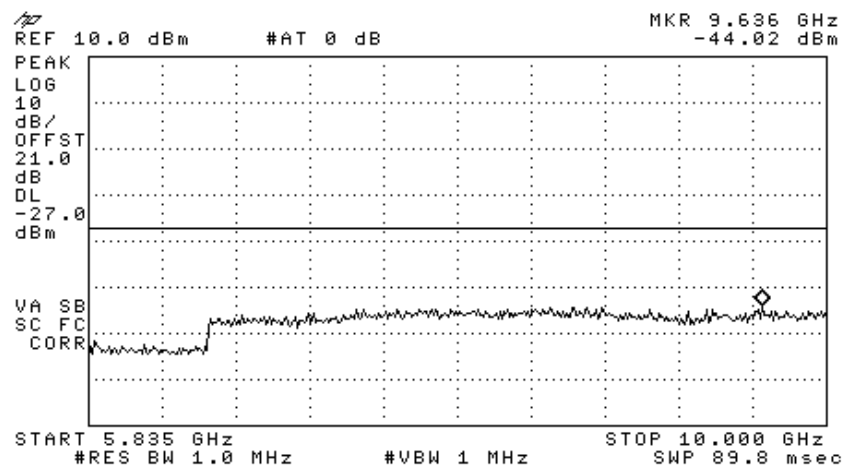


Figure 187 —5765 MHz BPSK

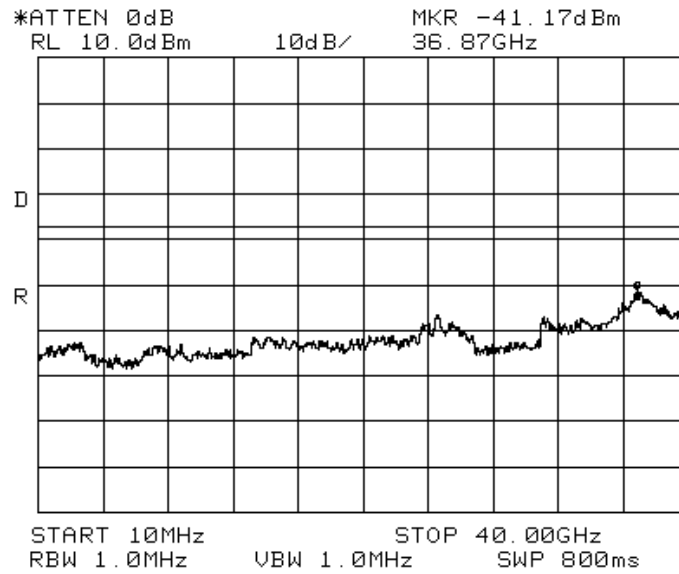


Figure 188 —5765 MHz BPSK

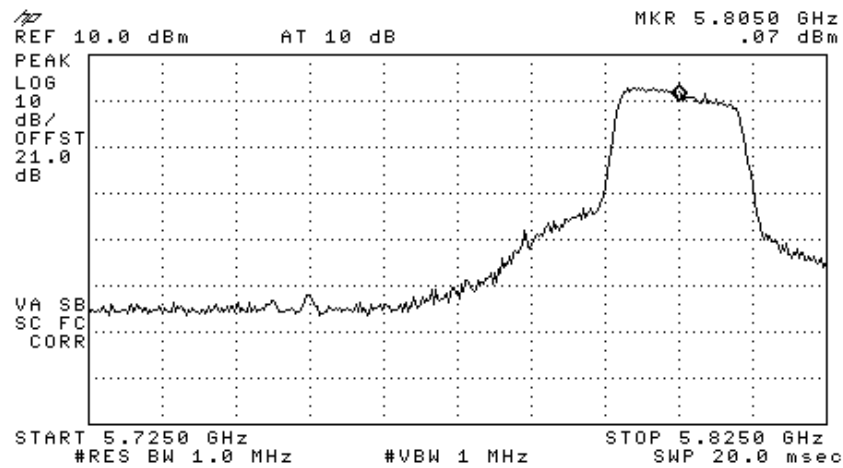


Figure 189 —5805 MHz BPSK

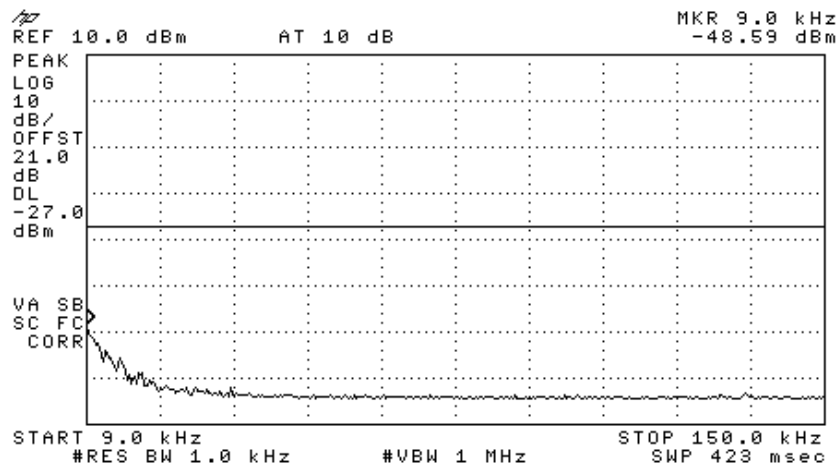


Figure 190 —5805 MHz BPSK

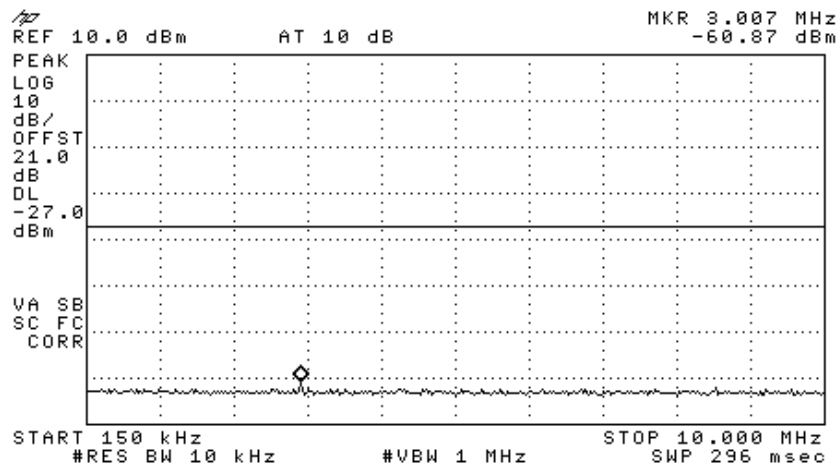


Figure 191 —5805 MHz BPSK

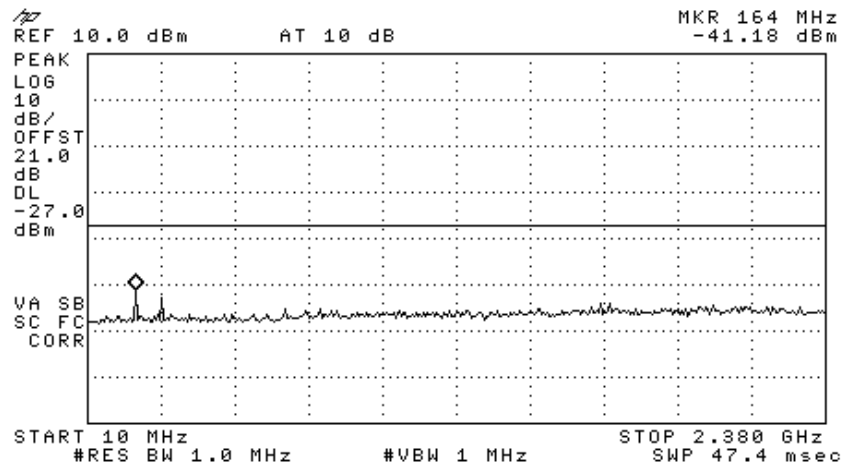


Figure 192 —5805 MHz BPSK

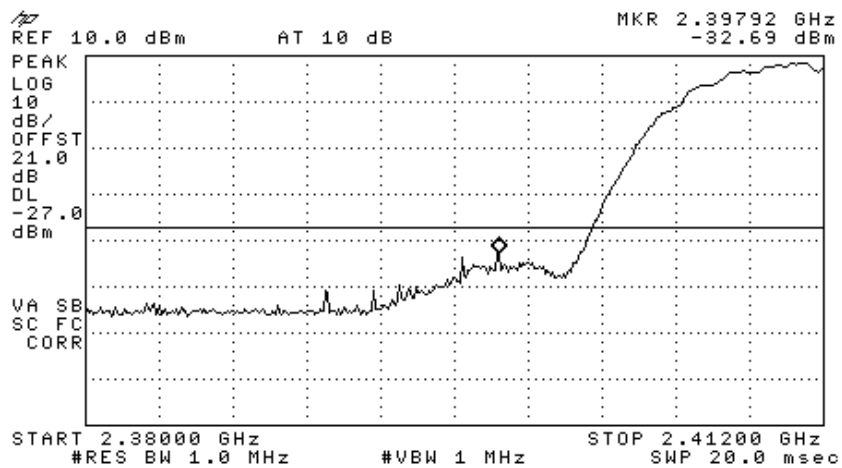


Figure 193 —5805 MHz BPSK

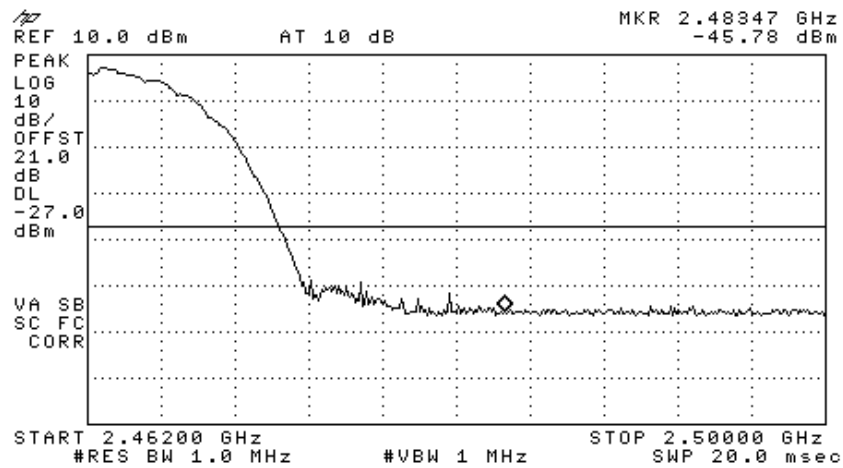


Figure 194 —5805 MHz BPSK

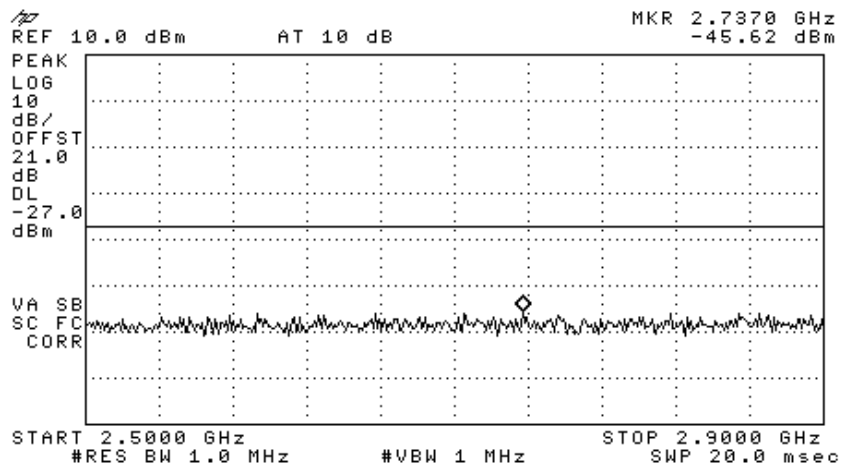


Figure 195 —5805 MHz BPSK

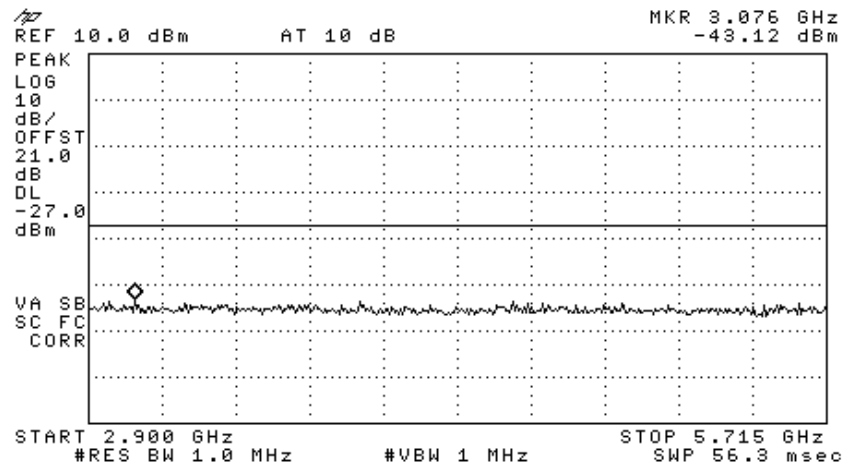


Figure 196 —5805 MHz BPSK

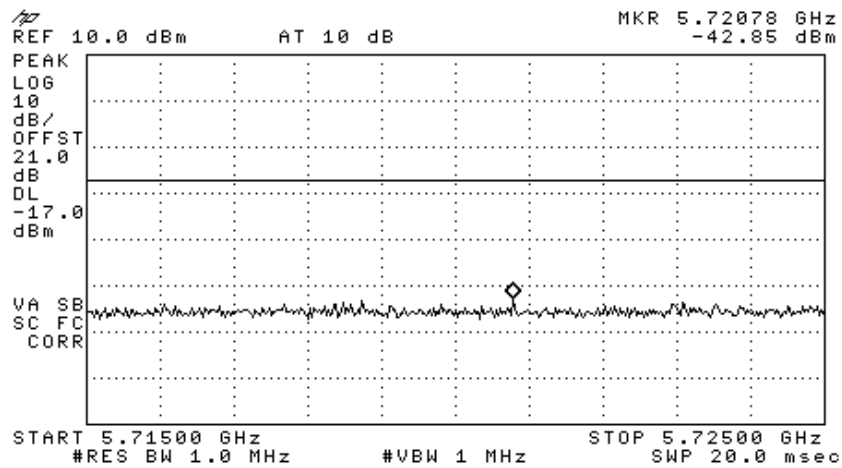


Figure 197 —5805 MHz BPSK

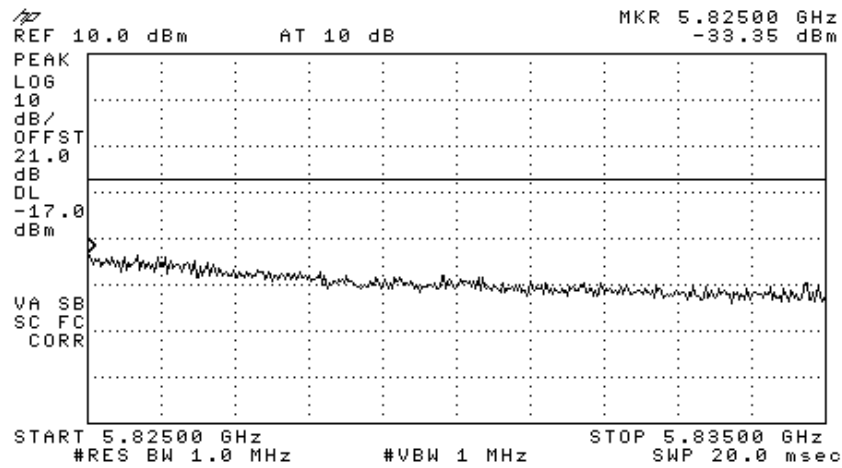


Figure 198 —5805 MHz BPSK

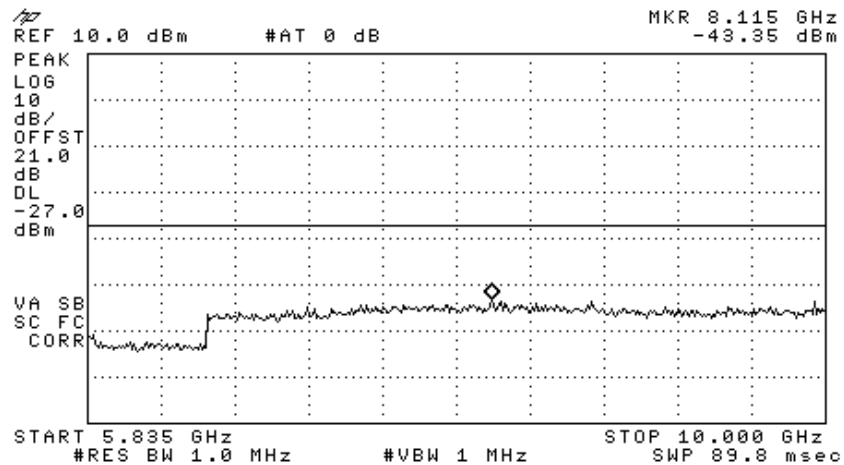


Figure 199 —5805 MHz BPSK

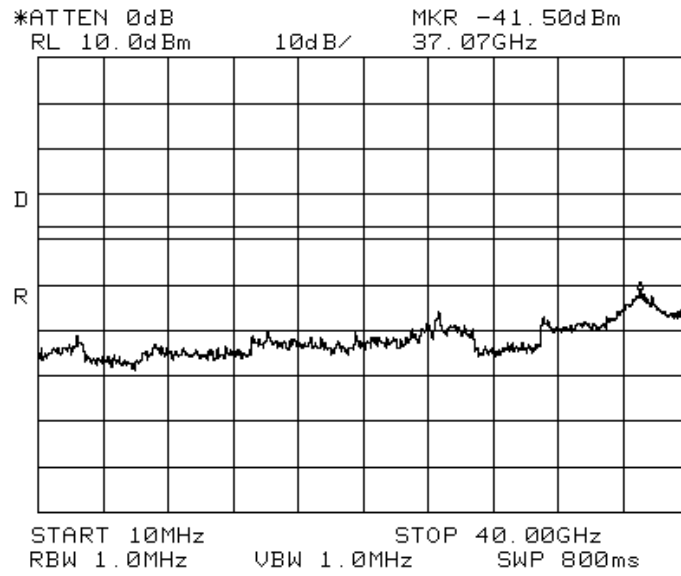


Figure 200 —5805 MHz BPSK

10.2 Results table

E.U.T Description: WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Cisco 1242 Access Points

Model No.: 860M With WCE

Serial Number: 1. 860M: 73903D 2. WCE: 739038

Specification: F.C.C. Part 15, Subpart E

Operation Frequency (MHz)	Modulation	Reading (dBm)	Specification (dBm)	Margin (dB)
5180	64QAM	-30.77	-27.0	-3.77
	BPSK	-31.35	-27.0	-4.35
5200	64QAM	-31.67	-27.0	-4.67
	BPSK	-32.74	-27.0	-5.74
5240	64QAM	-31.13	-27.0	-4.13
	BPSK	-32.13	-27.0	-5.13
5745	64QAM	-24.98	-17.0	-7.98
	BPSK	-23.94	-17.0	-6.94
5765	64QAM	-31.67	-27.0	-4.67
	BPSK	-30.22	-27.0	-3.22
5805	64QAM	-30.33	-27.0	-3.33
	BPSK	-32.69	-27.0	-5.69

Figure 201 Peak Power Output of 5150-5250; 5725-5825 MHz Bands

JUDGEMENT: Passed by 3.22 dB

TEST PERSONNEL:

Tester Signature: 

Date: 05.02.08

Typed/Printed Name: E. Pitt

10.3 Test Equipment Used.

Peak Power Output of 5150-5825 MHz Band

Instrument	Manufacturer	Model	Serial/Part Number	Calibration	
				Last Calibr.	Period
Spectrum Analyzer	HP	8592L	3826A01204	February 22, 2007	1 year
Spectrum Analyzer	HP	8564E	3442A00275	November 14, 2007	1 year
Attenuator	Jyebao	-	FAT-AM5AF5G6G2W20	May 9, 2007	1 year
Cable	Rhophase	KPS-5000-KPS	A1674	February 8, 2007	1 year

Figure 202 Test Equipment Used

11. Band Edge Spectrum 5GHz Transmitter 802.11b/g+802.11a Signals

[In Accordance with section 15.407)

11.1 Test procedure

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator (20 dB) and an appropriate coaxial cable (cable loss = 1 dB). The spectrum analyzer was set to 1 MHz resolution BW. Maximum power level below 5150 MHz and above 5350 MHz was measured at 5180 MHz and 5240MHz correspondingly. Maximum power level below 5725 MHz and above 5825 MHz was measured at 5745 MHz and 5805 MHz correspondingly.

The E.U.T. was tested at 5180, 5240, 5745, and 5805 MHz with the following modulations: 64QAM (54Mbit/sec) and BPSK (6Mbit/sec).

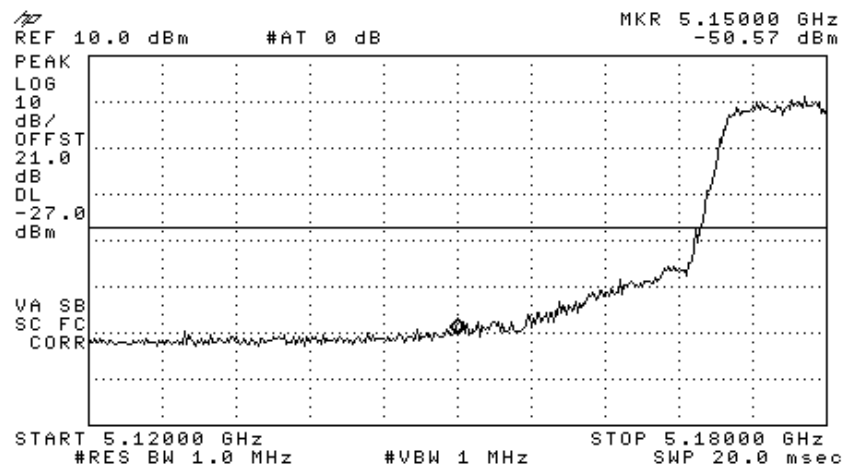


Figure 203 —5180 MHz 64QAM

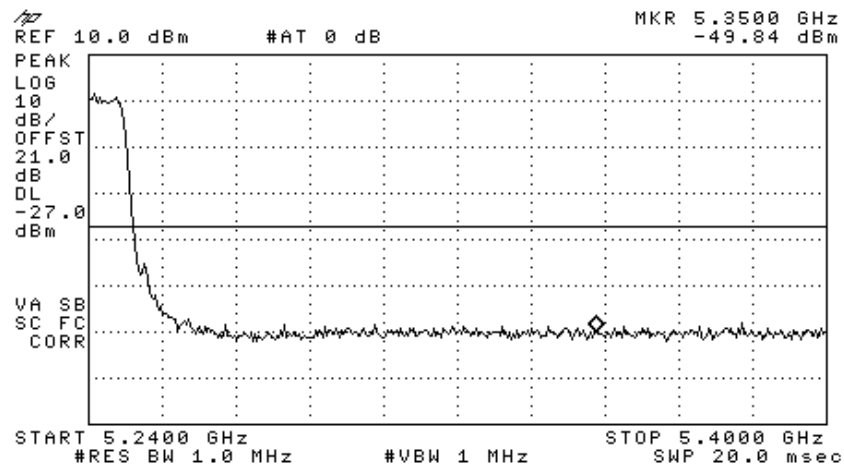


Figure 204 —5240 MHz 64QAM

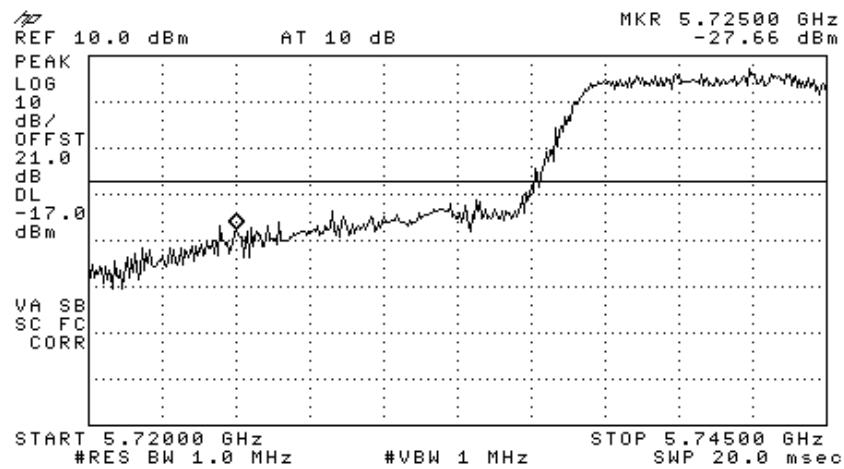


Figure 205 —5720 MHz 64QAM

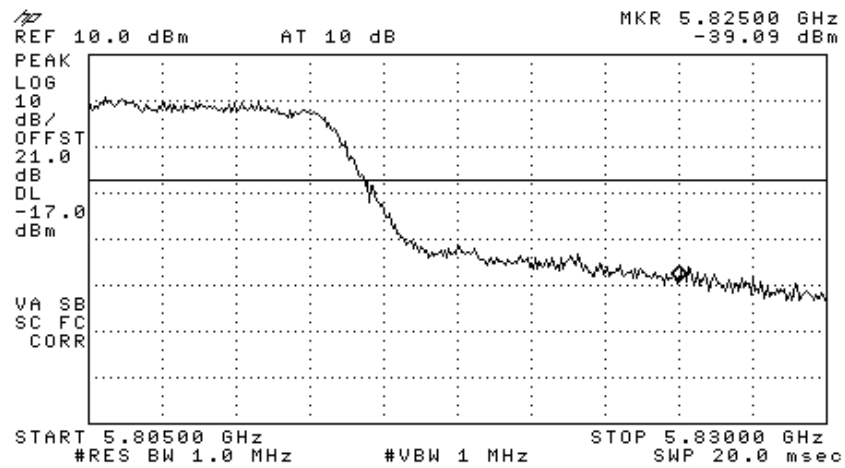


Figure 206 —5805 MHz 64QAM

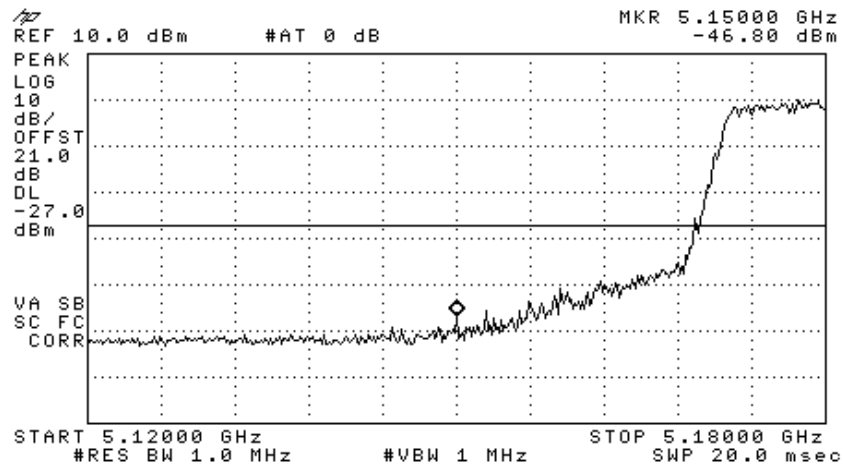


Figure 207 —5180 MHz BPSK

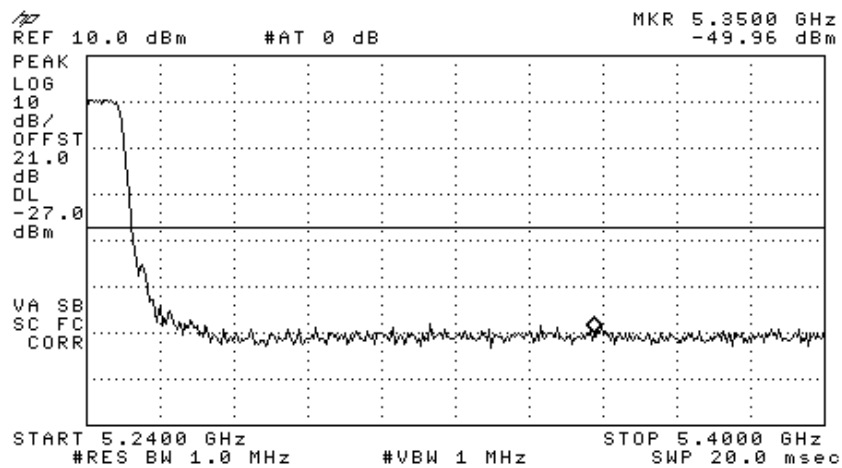


Figure 208 —5240 MHz BPSK

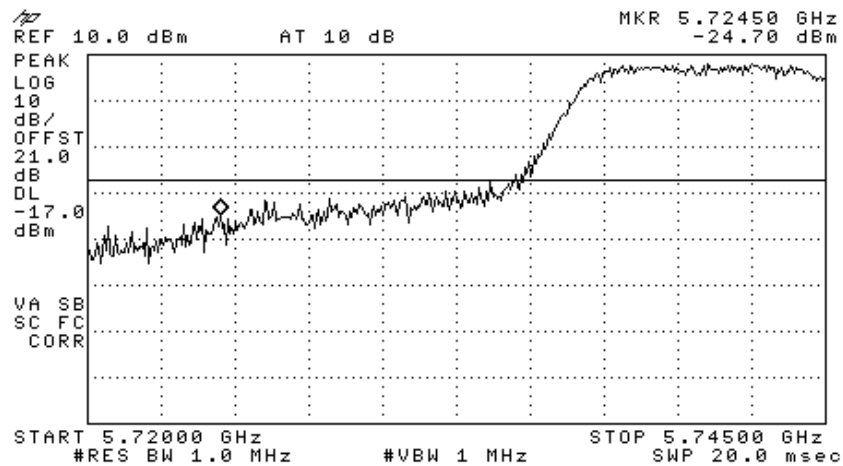


Figure 209 —5720 MHz BPSK

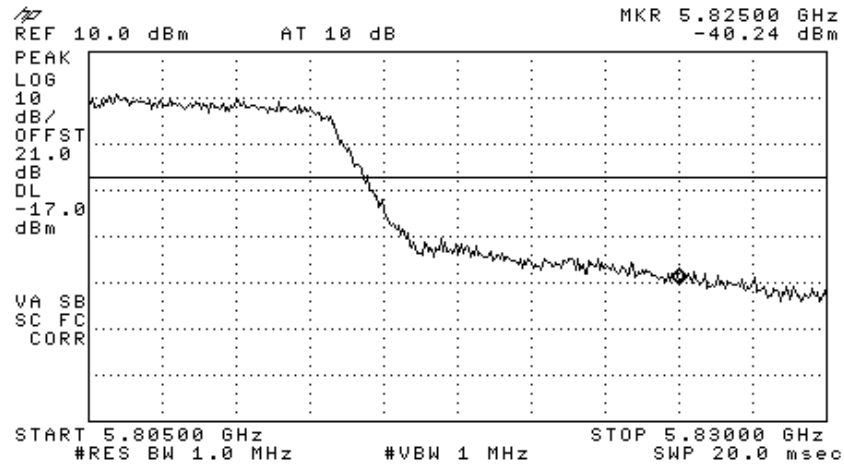


Figure 210 —5805 MHz BPSK

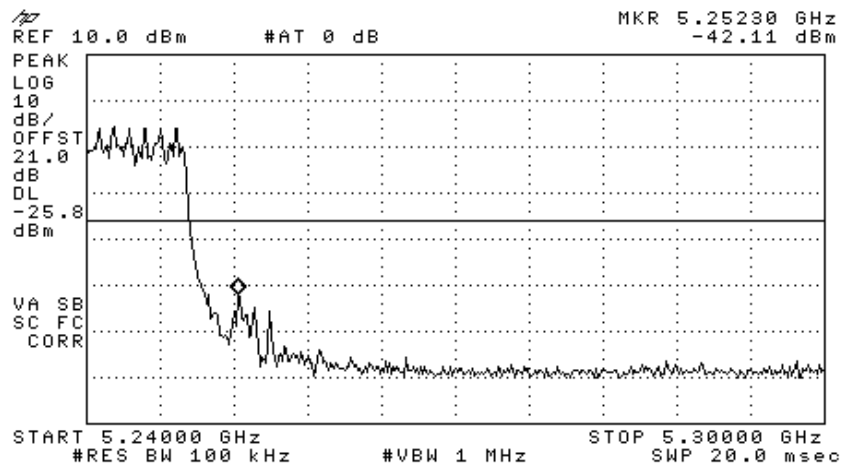


Figure 211 —Band Edge at 5.25 GHz Operation at 5.24 GHz 64QAM (Section 15.215(c))

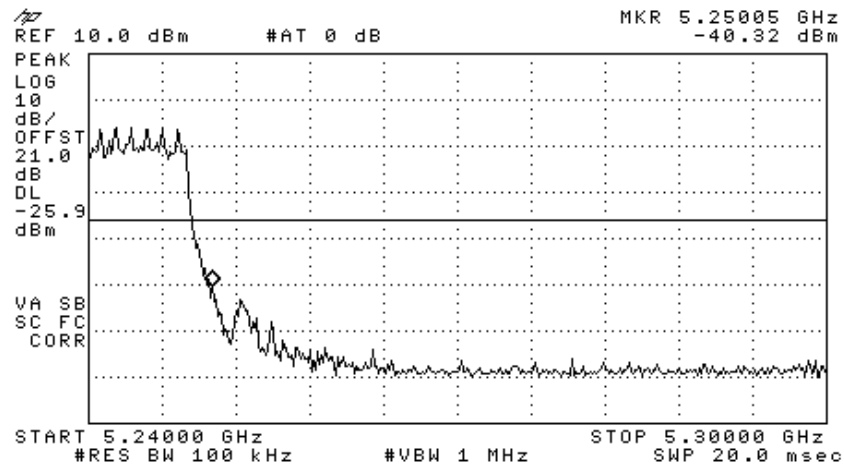


Figure 212 —Band Edge at 5.25 GHz Operation at 5.24 GHz BPSK (Section 15.215(c))

11.2 Results table

E.U.T. Description: WLAN Module With WCE (WiFi Coverage Extender) for DAS
With 4 Cisco 1242 Access Points

Model No.: 860M With WCE

Serial Number: 1. 860M: 73903D 2. WCE: 739038

Specification: F.C.C. Part 15, Subpart C (15.215(c))

Operation Frequency (MHz)	Modulation	Band Edge Frequency (MHz)	Result (dBc)	Specification (dBc)	Margin (dB)
5240	64QAM	5252	36.31	20.0	-16.31
	BPSK	5252	34.42	20.0	-14.42

Figure 213 Band Edge at 5.25 GHz operation at 5.24 GHz

JUDGEMENT: Passed by 14.42 dB

TEST PERSONNEL:

Tester Signature: 

Date: 05.02.08

Typed/Printed Name: E. Pitt

11.3 Results table

E.U.T. Description: WLAN Module With WCE (WiFi Coverage Extender) for DAS
 With 4 Cisco 1242 Access Points
 Model No.: 860M With WCE
 Serial Number: 1. 860M: 73903D 2. WCE: 739038
 Specification: F.C.C. Part 15, Subpart C (15.407)

Operation Frequency (MHz)	Modulation	Band Edge Frequency (MHz)	Result (dBm)	Specification (dBm)	Margin (dB)
5180	64QAM	5150	-50.57	-27.0	-23.57
	BPSK	5150	-46.80	-27.0	-19.80
5240	64QAM	5350	-49.84	-27.0	-22.84
	BPSK	5350	-49.96	-27.0	-22.90
5745	64QAM	5725	-27.66	-17.0	-10.66
	BPSK	5725	-24.70	-17.0	-7.70
5805	64QAM	5825	-39.09	-17.0	-22.09
	BPSK	5825	-40.24	-17.0	-23.24

Figure 214 Band Edge Spectrum

JUDGEMENT: Passed by 7.70 dB

TEST PERSONNEL:

Tester Signature: 

Date: 05.02.08

Typed/Printed Name: E. Pitt

11.4 Test Equipment Used.

Band edge Spectrum

Instrument	Manufacturer	Model	Serial/Part Number	Calibration	
				Last Calibr.	Period
Spectrum Analyzer	HP	8592L	3826A01204	February 22, 2007	1 year
Attenuator	Jyebao	-	FAT-AM5AF5G6G2W20	May 9, 2007	1 year
Cable	Rhophase	KPS-5000-KPS	A1674	February 8, 2007	1 year

Figure 215 Test Equipment Used

12. Antenna Gain 5GHz Transmitter 802.11b/g+802.11a Signals

The antenna gain is 7 dBi.

13. R.F Exposure/Safety 5GHz Transmitter 802.11b/g+802.11a Signals

Typical use of the E.U.T. is repeating WiFi signals for DAS. The typical placement of the E.U.T. is on a wall near the ceiling. The typical distance between the E.U.T. and the user in the worst case application, is >1 m.

Calculation of Maximum Permissible Exposure (MPE)
Based on Section 1.1307(b)(1) Requirements

(a) FCC limits at 5745 MHz is: $1 \frac{mW}{cm^2}$

Using table 1 of Section 1.1310 limit for general population/uncontrolled exposures, the above level is an average over 30 minutes.

(b) The power density produced by the E.U.T. is

$$S = \frac{P_t G_t}{4\pi R^2}$$

P_t - Transmitted Power (Peak) 77.8 mW= 18.91 dBm

G_t - Antenna Gain, 7 dBi = 5

R - Distance from Transmitter using 1 m worst case

(c) The peak power density is :

$$S_p = \frac{77.8 \times 5}{4\pi(100)^2} = 3.1 \times 10^{-3} \frac{mW}{cm^2}$$

(d) The duty cycle of transmission in actual worst case is 50%.

The average power source is:

$$38.9mW$$

(e) The averaged power density of the E.U.T. is:

$$S_{AV} = \frac{38.9 \times 5}{4\pi(100)^2} = 1.55 \times 10^{-3} \frac{mW}{cm^2}$$

(f) This is 3 orders of magnitude below the FCC limit.

14. Radiated Emission Per FCC Part 15 Sub-Part B Test Data 802.11b/g+802.11a Signals

14.1 Test Specification

30-40000 MHz, FCC Part 15, Subpart B, CLASS B

14.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 4.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The effect of varying the position of the cables was investigated to find the configuration that produces maximum emission.

The frequency range 30-4000 MHz was scanned, and the list of the highest emissions was verified and updated accordingly.

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 2.9 - 40 GHz, a spectrum analyzer including a low noise amplifier was used. The test distance was 3 meters. During peak measurements, the I.F. bandwidth was 1 MHz, and video bandwidth 3 MHz. During average measurements, the I.F. bandwidth was 1 MHz and video bandwidth was 100 Hz.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization. Verification of the E.U.T emissions was based on the following methods: turning the E.U.T on and off; using a frequency span less than 10 MHz; observation of the signal level during turntable rotation. (Background noise is not affected by the rotation of the E.U.T.)

The emissions were measured at a distance of 3 meters.

The E.U.T. was tested in both Rx and Tx modes.

The E.U.T. was tested at the operating frequencies of, 5180, 5200, 5240, 5745, 5765, and 5805 MHz using the following modulations: 64QAM, and BPSK.

14.3 Test Data

JUDGEMENT: Passed by 3.5 dB.


The results for all operating frequencies and modulations were the same.

The margin between the emission level and the specification limit is 3.5 dB in the worst case at the frequency of 39.70 MHz, vertical polarization.

The EUT met the requirements of the F.C.C. Part 15, Subpart B, specification.

The results for all operating frequencies and modulations were the same.

TEST PERSONNEL:

Tester Signature: 

Date: 05.02.08

Typed/Printed Name: A. Sharabi

Radiated Emission

E.U.T Description WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Cisco 1242 Access Points

Type 860M With WCE

Serial Number: 1. 860M: 73903D
2. WCE: 739038

Specification: FCC Part 15, Subpart B, Class B

Antenna Polarization: Horizontal
Antenna: 3 meters distance

Frequency range: 30 MHz to 300 MHz
Detectors: Peak, Quasi-peak

Frequency	Peak Amp	QP Amp	Correction	Specification	Margin
(MHz)	(dB μ V/m)	(dB μ V/m)	(dB)	(dB μ V/m)	(dB)
39.70	31.7	27.3	13.4	40.0	-12.7
46.92	28.4	23.5	12.1	40.0	-16.5
162.58	36.0	31.7	15.4	43.5	-11.8
175.07	40.8	35.8	15.9	43.5	-7.7
207.20	37.1	32.2	18.0	43.5	-11.3
242.11	40.6	36.0	20.0	46.0	-10.0

**Figure 216. Radiated Emission. Antenna Polarization: HORIZONTAL.
Detectors: Peak, Quasi-peak**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Radiated Emission

E.U.T Description WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Cisco 1242 Access Points

Type 860M With WCE


Serial Number: 1. 860M: 73903D
2. WCE: 739038

Specification: FCC Part 15, Subpart B, Class B

Antenna Polarization: Horizontal
Antenna: 3 meters distance

Frequency range: 30 MHz to 300 MHz
Detectors: Peak, Quasi-peak

 13:48:32 FEB 04, 2008

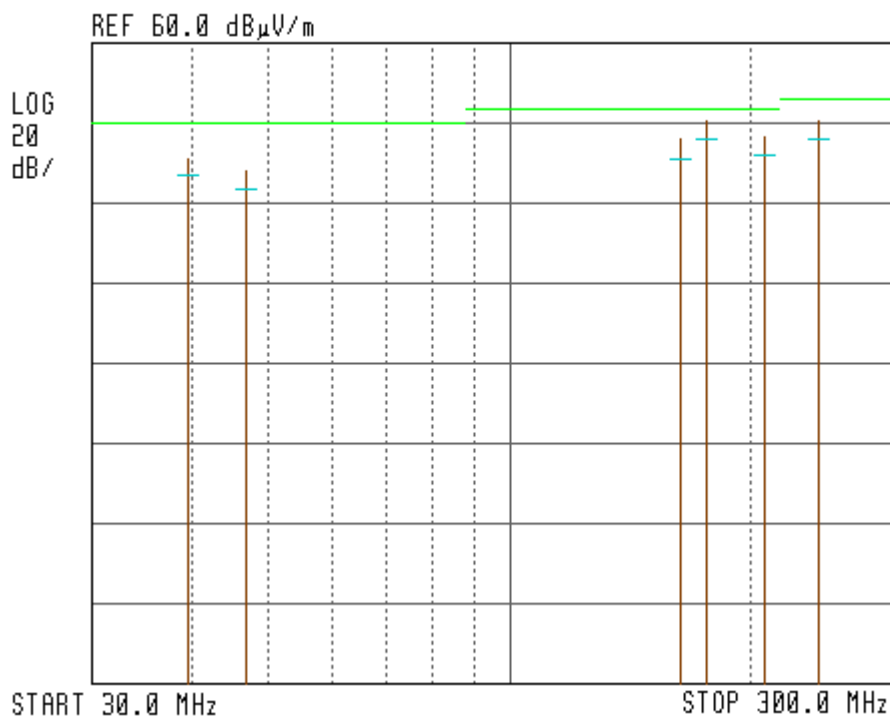

**Figure 217. Radiated Emission. Antenna Polarization: HORIZONTAL
Detectors: Peak, Quasi-peak**

Note:

1. Horizontal axis shows logarithmic frequency scale.
2. The vertical axis shows amplitude (in dB μ V/m).
3. Peak detection is designated by the top of each vertical line.
4. Quasi-peak detection is designated by the first dash mark (from the top) of each vertical line.

Radiated Emission

E.U.T Description WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Cisco 1242 Access Points

Type 860M With WCE

Serial Number: 1. 860M: 73903D
2. WCE: 739038

Specification: FCC Part 15, Subpart B, Class B

Antenna Polarization: Vertical
Antenna: 3 meters distance

Frequency range: 30 MHz to 300 MHz
Detectors: Peak, Quasi-peak

Frequency	Peak Amp	QP Amp	Correction	Specification	Margin
(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dBμV/m)	(dB)
34.93	36.0	32.1	14.7	40.0	-7.9
39.70	41.6	36.5	13.4	40.0	-3.5
46.15	44.4	34.8	12.2	40.0	-5.2
162.58	41.6	38.8	15.4	43.5	-4.7
175.07	40.9	37.6	15.9	43.5	-5.9
242.11	38.6	34.7	20.0	46.0	-11.3

**Figure 218. Radiated Emission. Antenna Polarization: VERTICAL.
Detectors: Peak, Quasi-peak**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Radiated Emission

E.U.T Description WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Cisco 1242 Access Points

Type 860M With WCE


Serial Number: 1. 860M: 73903D
2. WCE: 739038

Specification: FCC Part 15, Subpart B, Class B

Antenna Polarization: Vertical
Antenna: 3 meters distance

Frequency range: 30 MHz to 300 MHz
Detectors: Peak, Quasi-peak

 12:34:02 FEB 04, 2008

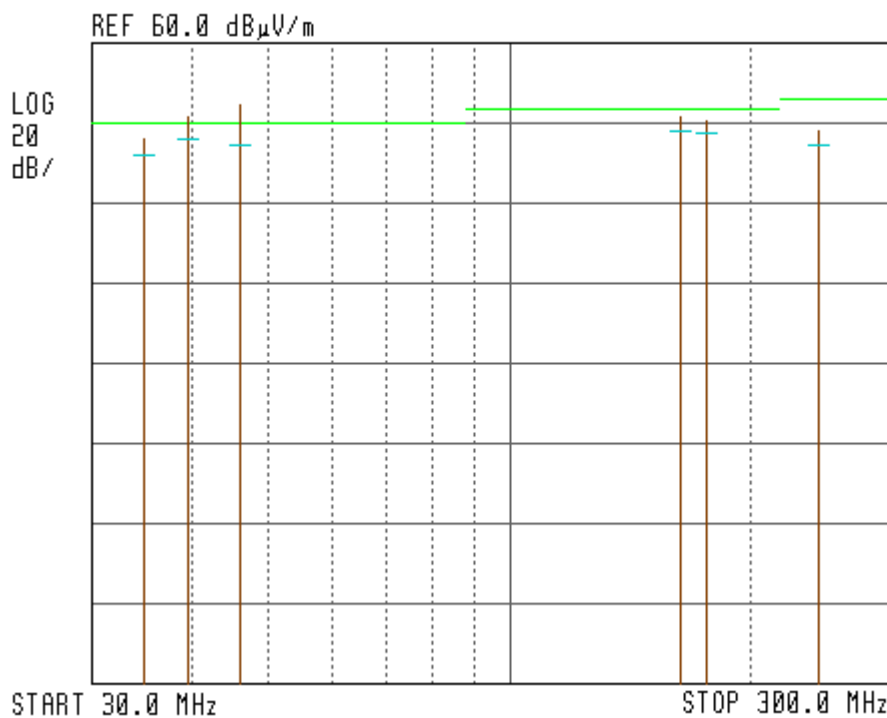

**Figure 219. Radiated Emission. Antenna Polarization: VERTICAL.
Detectors: Peak, Quasi-peak**

Note:

1. Horizontal axis shows logarithmic frequency scale.
2. The vertical axis shows amplitude (in dB μ V/m).
3. Peak detection is designated by the top of each vertical line.
4. Quasi-peak detection is designated by the first dash mark (from the top) of each vertical line.

14.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial No.	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 12, 2007	1 Year
RF Filter Section	HP	85420E	3705A00248	November 12, 2007	1 Year
Antenna Biconical	ARA	BCD 235/B	1041	March 22, 2007	1 Year
Antenna Log Periodic	ARA	LPD-2010/A	1038	November 22, 2007	1 Year
Antenna Log Periodic	A.H. Systems	SAS-200/511	253	February 4, 2007	2 Years
Double Ridged Waveguide Horn Antenna	EMCO	3115	29845	March 15, 2006	2 Years
Horn Antenna	ARA	SWH-28	1008	December 8, 2006	2 Years
Horn Antenna	Narda	V637	0410	December 8, 2006	2 Years
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS-0411N313	013	November 2, 2007	1 Year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	February 8, 2007	1 Year
Low Noise Amplifier	MK Milliwave	MKT6-3000 4000-30-13P	399	February 8, 2007	1 Year
Spectrum Analyzer	HP	8592L	3826A01204	February 22, 2007	1 Year
Spectrum Analyzer	HP	8564E	3442A00275	November 14, 2007	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKG19982	N/A	N/A

14.5 Field Strength Calculation

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$FS = RA + AF + CF$$

FS:	Field Strength [dB μ v/m]
RA:	Receiver Amplitude [dB μ v]
AF:	Receiving Antenna Correction Factor [dB/m]
CF:	Cable Attenuation Factor [dB]

No external pre-amplifiers are used.

15. Spurious Radiated Emission in the Restricted Band, Below 1 GHz 5GHz Transmitter 802.11b/g+802.11a + CELL + PCS Signals

15.1 Test Specification

9kHz-1000 MHz, F.C.C., Part 15, Subpart C

15.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3.

See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 3.1.

The frequency range 9 kHz-1000 MHz was scanned, and the list of the highest emissions was verified and updated accordingly.

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 9 kHz-30 MHz, the loop antenna was rotated on its vertical axis, The antenna height (center of loop) was 1 meter.

In the frequency range 30-1000 MHz, the readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

Verification of the E.U.T emissions was based on the following methods:

- Turning the E.U.T on and off.

- Using a frequency span less than 10 MHz.

- Observation of the signal level during turntable rotation. Background noise is not affected by the rotation of the E.U.T.

The E.U.T. was tested at the operating frequencies of, 5180, 5200, 5240, 5745, 5765, and 5805 MHz using the following modulations:,64QAM, and BPSK.

15.3 Test Data

JUDGEMENT: Passed by 3.5 dB.

The margin between the emission level and the specification limit is 3.5 dB in the worst case at the frequency of 39.70 MHz, vertical polarization.

The EUT met the requirements of the F.C.C. Part 15, Subpart C, specification.

The results for all operating frequencies and modulations were the same.

TEST PERSONNEL:

Tester Signature: _____

Date: 05.02.08

Typed/Printed Name: A. Sharabi

Radiated Emission

E.U.T Description WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Cisco 1242 Access Points

Type 860M With WCE

Serial Number: 1. 860M: 73903D
2. WCE: 739038

Specification: FCC Part 15, Subpart C

Antenna Polarization: Horizontal Frequency range: 30 MHz to 300 MHz
Antenna: 3 meters distance Detectors: Peak, Quasi-peak

Frequency	Peak Amp	QP Amp	Correction	Specification	Margin
(MHz)	(dB μ V/m)	(dB μ V/m)	(dB)	(dB μ V/m)	(dB)
39.70	31.7	27.3	13.4	40.0	-12.7
46.92	28.4	23.5	12.1	40.0	-16.5
162.58	36.0	31.7	15.4	43.5	-11.8
175.07	40.8	35.8	15.9	43.5	-7.7
207.20	37.1	32.2	18.0	43.5	-11.3
242.11	40.6	36.0	20.0	46.0	-10.0

**Figure 220. Radiated Emission. Antenna Polarization: HORIZONTAL.
Detectors: Peak, Quasi-peak**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Radiated Emission

E.U.T Description WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Cisco 1242 Access Points

Type 860M With WCE


Serial Number: 1. 860M: 73903D
2. WCE: 739038

Specification: FCC Part 15, Subpart C

Antenna Polarization: Horizontal
Antenna: 3 meters distance

Frequency range: 30 MHz to 300 MHz
Detectors: Peak, Quasi-peak

 13:48:32 FEB 04, 2008

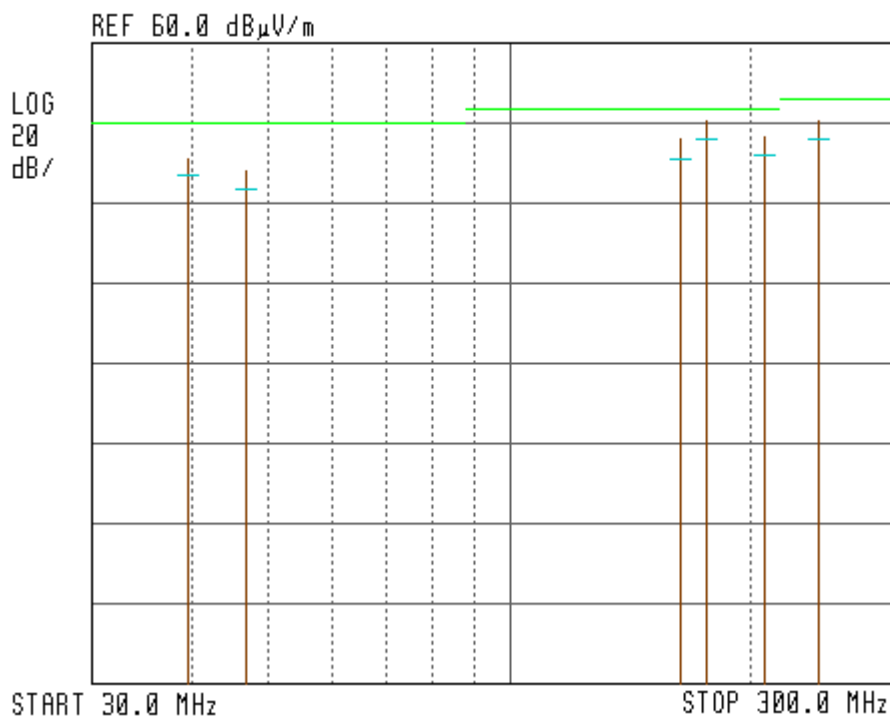

**Figure 221. Radiated Emission. Antenna Polarization: HORIZONTAL
Detectors: Peak, Quasi-peak**

Note:

1. Horizontal axis shows logarithmic frequency scale.
2. The vertical axis shows amplitude (in dB μ V/m).
3. Peak detection is designated by the top of each vertical line.
4. Quasi-peak detection is designated by the first dash mark (from the top) of each vertical line.

Radiated Emission

E.U.T Description WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Cisco 1242 Access Points

Type 860M With WCE

Serial Number: 1. 860M: 73903D
2. WCE: 739038

Specification: FCC Part 15, Subpart C

Antenna Polarization: Vertical
Antenna: 3 meters distance

Frequency range: 30 MHz to 300 MHz
Detectors: Peak, Quasi-peak

Frequency (MHz)	Peak Amp (dB μ V/m)	QP Amp (dB μ V/m)	Correction (dB)	Specification (dB μ V/m)	Margin (dB)
34.93	36.0	32.1	14.7	40.0	-7.9
39.70	41.6	36.5	13.4	40.0	-3.5
46.15	44.4	34.8	12.2	40.0	-5.2
162.58	41.6	38.8	15.4	43.5	-4.7
175.07	40.9	37.6	15.9	43.5	-5.9
242.11	38.6	34.7	20.0	46.0	-11.3

**Figure 222. Radiated Emission. Antenna Polarization: VERTICAL.
Detectors: Peak, Quasi-peak**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Radiated Emission

E.U.T Description WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Cisco 1242 Access Points

Type 860M With WCE

Serial Number: 1. 860M: 73903D
2. WCE: 739038

Specification: FCC Part 15, Subpart C

Antenna Polarization: Vertical
Antenna: 3 meters distance

Frequency range: 30 MHz to 300 MHz
Detectors: Peak, Quasi-peak

12:34:02 FEB 04, 2008

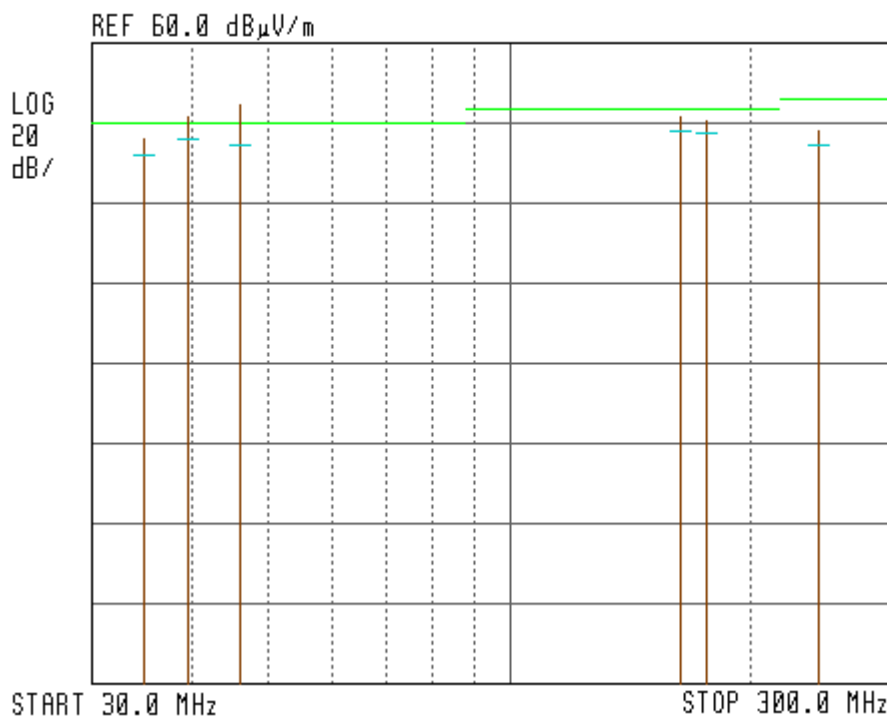


Figure 223. Radiated Emission. Antenna Polarization: VERTICAL. Detectors: Peak, Quasi-peak

Note:

1. Horizontal axis shows logarithmic frequency scale.
2. The vertical axis shows amplitude (in dB μ V/m).
3. Peak detection is designated by the top of each vertical line.
4. Quasi-peak detection is designated by the first dash mark (from the top) of each vertical line.

15.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3411A00102	November 12, 2007	1 year
RF Section	HP	85420E	3427A00103	November 12, 2007	1 year
Antenna Bioconical	ARA	BCD 235/B	1041	March 22, 2007	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	November 22, 2007	1 year
Active Loop Antenna	EMCO	6502	9506-2950	October 15, 2007	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

15.5 Field Strength Calculation

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$[\text{dB}\mu\text{v/m}] \text{ FS} = \text{RA} + \text{AF} + \text{CF}$$

FS:	Field Strength [dB μ v/m]
RA:	Receiver Amplitude [dB μ v]
AF:	Receiving Antenna Correction Factor [dB/m]
CF:	Cable Attenuation Factor [dB]

No external pre-amplifiers are used.

16. Spurious Radiated Emission in the Restricted Band, Above 1 GHz 5GHz Transmitter 802.11b/g+802.11a + CELL + PCS Signals

16.1 Radiated Emission Above 1 GHz

The E.U.T operation mode and test set-up are as described in Section 3.

See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 3.1.

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.

In the frequency range 1-2.9 GHz, a computerized EMI receiver complying to CISPR 16 requirements was used.

In the frequency range 2.9-40.0 GHz, a spectrum analyzer including a low noise amplifier was used. During average measurements, the IF bandwidth was 1 MHz and the video bandwidth was 100Hz. During peak measurements, the IF bandwidth was 1 MHz and the video bandwidth was 3 MHz.

The test distance was 3 meters.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

Verification of the E.U.T emissions was based on the following methods: turning the E.U.T on and off; using a frequency span less than 10 MHz; observation of the signal level during turntable rotation. (Background noise is not affected by the rotation of the E.U.T.)

The E.U.T. was tested at the operating frequencies of, 5180, 5200, 5240, 5745, 5765, and 5805 MHz using the following modulations: 64QAM, and BPSK.

16.2 Test Data

JUDGEMENT: Passed by 1.3 dB

For the operating frequencies of 5180, 5200, and 5240, the signals in the frequency range of 1.0 – 40.0 GHz were more than 20 dB below the specification limit.

For the operation frequency of 5745 MHz, the margin between the emission level and the specification limit is 2.9 dB in the worst case at the frequency of 11490.00 MHz, vertical polarization.

For the operation frequency of 5765 MHz, the margin between the emission level and the specification limit is 1.5 dB in the worst case at the frequency of 11530.00 MHz, vertical polarization.

For the operation frequency of 5805 MHz, the margin between the emission level and the specification limit is 1.3 dB in the worst case at the frequency of 11610.00 MHz, vertical polarization.

The results for all modulations were the same.

The EUT met the requirements of the F.C.C. Part 15, Subpart C, specification.

TEST PERSONNEL:

Tester Signature: 

Date: 05.02.08

Typed/Printed Name: A. Sharabi

Radiated Emission Above 1 GHz

E.U.T Description WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Cisco 1242 Access Points

Type 860M With WCE

Serial Number: 1. 860M: 73903D
2. WCE: 739038

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 40.0 GHz

Test Distance: 3 meters Detector: Peak

Operation Frequency: 5745 MHz

Freq.	Polarity	Peak Amp	Peak. Specification	Peak. Margin
(MHz)	(H/V)	(dB μ V/m)	(dB μ V/m)	(dB)
11490.00	H	58.7*	74.0	-15.3
11490.00	V	60.9*	74.0	-13.1

Figure 224. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL. Detector: Peak

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Amp” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

Radiated Emission Above 1 GHz

E.U.T Description WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Cisco 1242 Access Points

Type 860M With WCE

Serial Number: 1. 860M: 73903D
2. WCE: 739038

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 40.0 GHz

Test Distance: 3 meters Detector: Average

Operation Frequency: 5745 MHz

Freq.	Polarity	Average Amp	Average Specification	Peak. Margin
(MHz)	(H/V)	(dB μ V/m)	(dB μ V/m)	(dB)
11490.00	H	48.4*	54.0	-5.6
11490.00	V	51.1*	54.0	-2.9

Figure 225. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL. Detector: Average

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Amp” includes correction factor.

* Correction Factor = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

Radiated Emission Above 1 GHz

E.U.T Description WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Cisco 1242 Access Points

Type 860M With WCE

Serial Number: 1. 860M: 73903D
2. WCE: 739038

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 40.0 GHz

Test Distance: 3 meters Detector: Peak

Operation Frequency: 5765 MHz

Freq.	Polarity	Peak Amp	Peak. Specification	Peak. Margin
(MHz)	(H/V)	(dB μ V/m)	(dB μ V/m)	(dB)
11530.00	H	58.5*	74.0	-15.5
11530.00	V	66.2*	74.0	-7.8

Figure 226. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL. Detector: Peak

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Amp” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

Radiated Emission Above 1 GHz

E.U.T Description WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Cisco 1242 Access Points

Type 860M With WCE

Serial Number: 1. 860M: 73903D
2. WCE: 739038

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 40.0 GHz

Test Distance: 3 meters Detector: Average

Operation Frequency: 5765 MHz

Freq.	Polarity	Average Amp	Average Specification	Peak. Margin
(MHz)	(H/V)	(dBμV/m)	(dB μV/m)	(dB)
11530.00	H	49.3*	54.0	-4.7
11530.00	V	52.5*	54.0	-1.5

Figure 227. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL. Detector: Average

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Amp” includes correction factor.

* Correction Factor = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

Radiated Emission Above 1 GHz

E.U.T Description WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Cisco 1242 Access Points

Type 860M With WCE

Serial Number: 1. 860M: 73903D
2. WCE: 739038

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 40.0 GHz

Test Distance: 3 meters Detector: Peak

Operation Frequency: 5805 MHz

Freq.	Polarity	Peak Amp	Peak. Specification	Peak. Margin
(MHz)	(H/V)	(dB μ V/m)	(dB μ V/m)	(dB)
11610.00	H	58.8*	74.0	-15.2
11610.00	V	68.5*	74.0	-6.5

Figure 228. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL. Detector: Peak

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Amp” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

Radiated Emission Above 1 GHz

E.U.T Description WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Cisco 1242 Access Points

Type 860M With WCE

Serial Number: 1. 860M: 73903D
2. WCE: 739038

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 40.0 GHz

Test Distance: 3 meters Detector: Average

Operation Frequency: 5805 MHz

Freq.	Polarity	Average Amp	Average Specification	Peak. Margin
(MHz)	(H/V)	(dB μ V/m)	(dB μ V/m)	(dB)
11610.00	H	49.5*	54.0	-4.5
11610.00	V	52.7*	54.0	-1.3

Figure 229. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL. Detector: Average

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Amp” includes correction factor.

* Correction Factor = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

16.3 Test Instrumentation Used, Radiated Measurements Above 1 GHz

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
Receiver	HP	85422E	3411A00102	November 12, 2007	1 year
RF Section	HP	85420E	3427A00103	November 12, 2007	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	ThinkJet2225	2738508357	N/A	N/A
Antenna-Log Periodic	A.H.System	SAS-200/511	253	February 4, 2007	2 years
Double Ridged Waveguide Horn Antenna	EMCO	3115	29845	March 15, 2006	2 years
Horn Antenna	ARA	SWH-28	1008	December 8, 2006	2 year
Horn Antenna	Narda	V637	0410	December 8, 2006	2 year
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS-0411N313	013	November 2, 2007	1 year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	February 8, 2007	1 year
Low Noise Amplifier	MK Milliwave	MKT6-3000 400-30-13P	399	February 8, 2007	1 year
Spectrum Analyzer	HP	8592L	3826A01204	February 22, 2007	1 year
Spectrum Analyzer	HP	8546E	3442A00275	November 14, 2007	1 year
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

17. 26 dB Bandwidth 5 GHz Transmitter 802.11b/g+802.11a + CELL + PCS Signals

17.1 Test procedure

The E.U.T. was set to the applicable test frequency. The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator (20 dB) and appropriate coaxial cable (cable loss = 1 dB). The spectrum analyzer was set to 300 kHz resolution BW. The spectrum bandwidth of the E.U.T. was measured and recorded.

The E.U.T. was tested at 5180, 5200, 5240, 5745, 5765, and 5805 MHz with the following modulations: 64QAM (54Mbit/sec) and BPSK (6Mbit/sec).

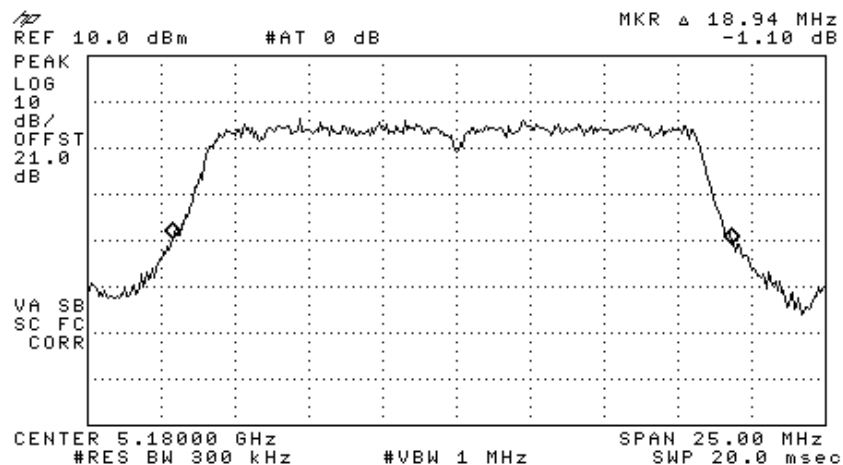


Figure 230 —5180 MHz 64QAM

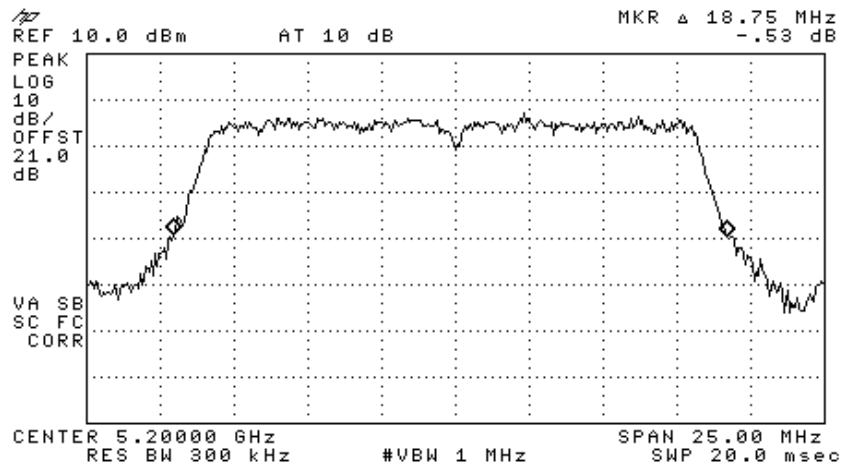


Figure 231 —5200 MHz 64QAM

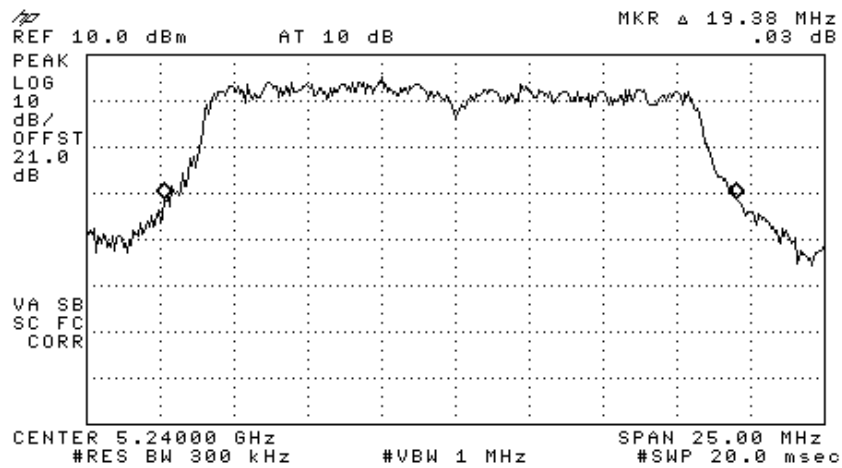


Figure 232 —5240 MHz 64QAM

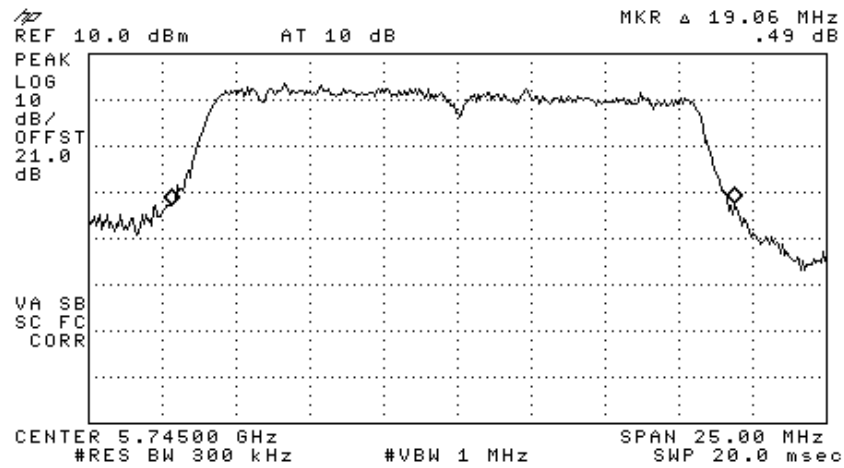


Figure 233 —5745 MHz 64QAM

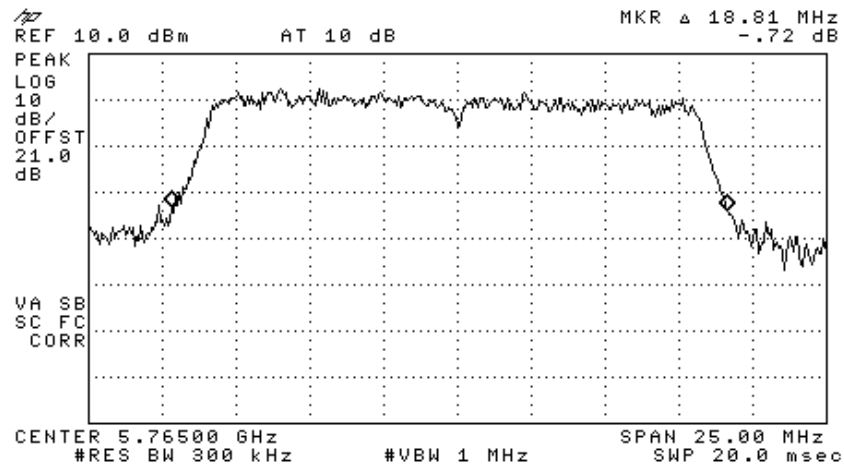


Figure 234 —5765 MHz 64QAM

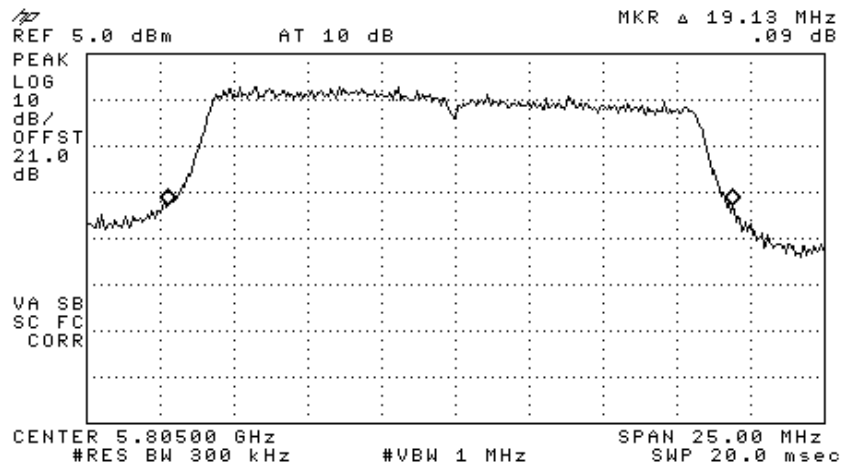


Figure 235 —5805 MHz 64QAM

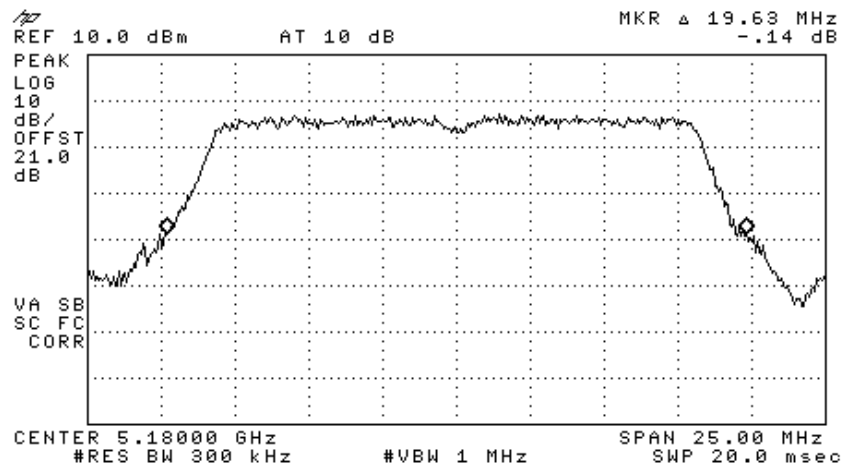


Figure 236 —5180 MHz BPSK

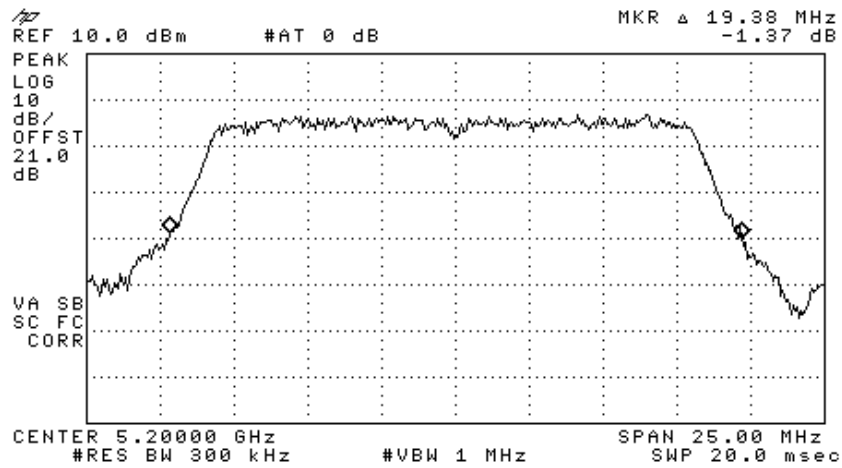


Figure 237 —5200 MHZ BPSK

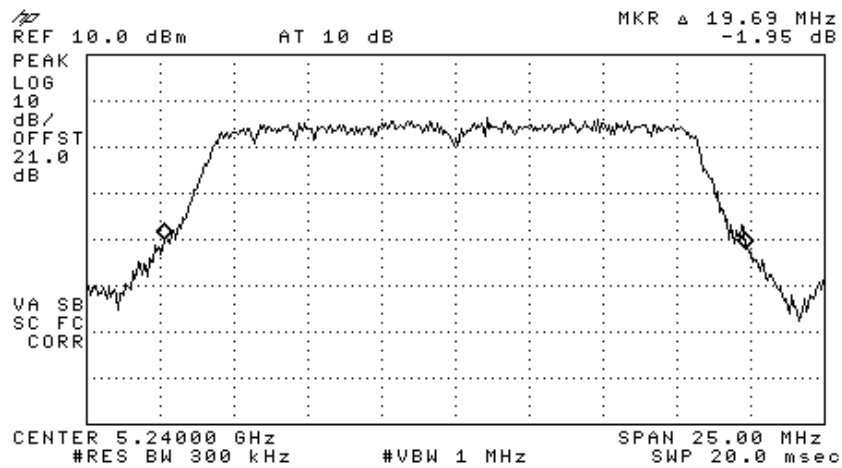


Figure 238 —5240 MHZ BPSK

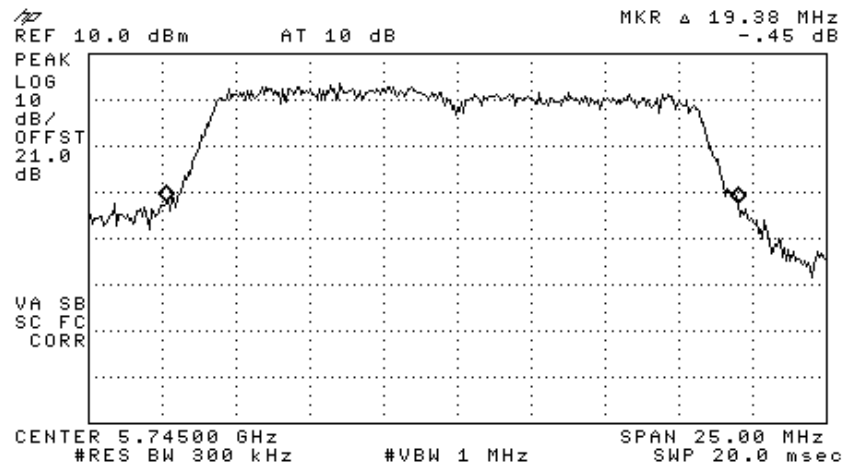


Figure 239 —5745 MHz BPSK

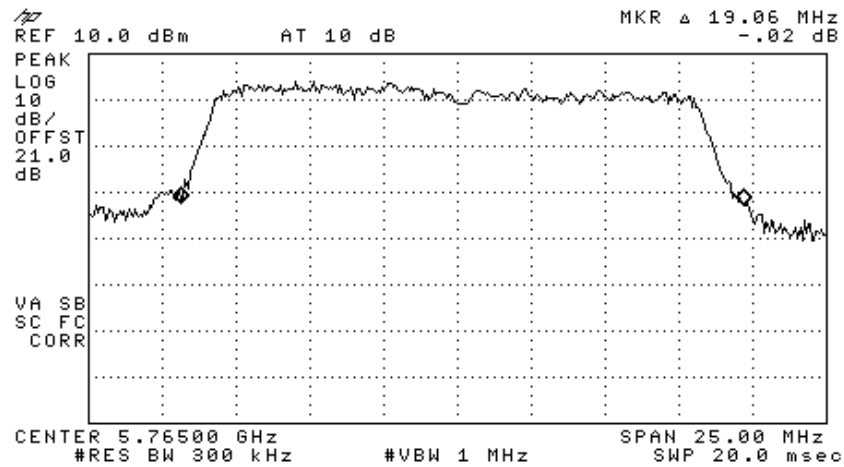


Figure 240 —5765 MHz BPSK

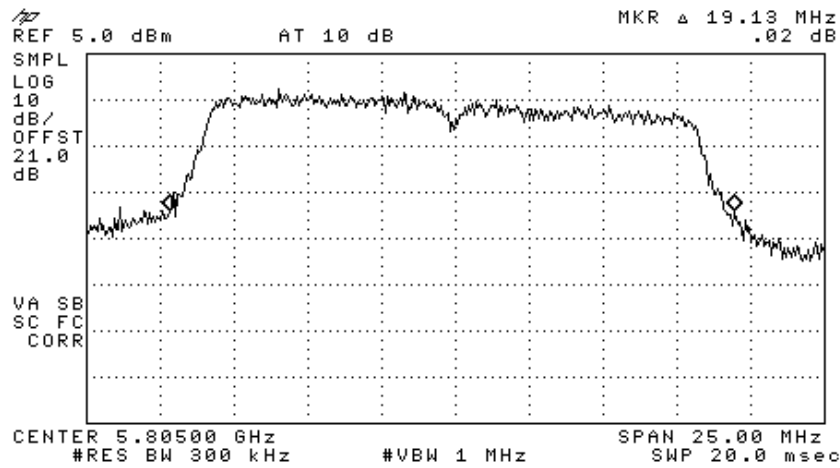


Figure 241 —5805 MHZ BPSK

Operation Frequency (MHz)	Modulation	26 dB Bandwidth (dBm)
5180	64QAM	18.94
	BPSK	19.63
5200	64QAM	18.75
	BPSK	19.38
5240	64QAM	19.38
	BPSK	19.69
5745	64QAM	19.06
	BPSK	19.38
5765	64QAM	18.81
	BPSK	19.06
5805	64QAM	19.13
	BPSK	19.13

TEST PERSONNEL:

Tester Signature: 

Date: 05.02.08

Typed/Printed Name: E. Pitt

17.2 Test Equipment Used.

26 dB Minimum Bandwidth

Instrument	Manufacturer	Model	Serial/Part Number	Calibration	
				Last Calibr.	Period
Spectrum Analyzer	HP	8592L	3826A01204	February 22, 2007	1 year
Attenuator	Jyebao	-	FAT-AM5AF5G6G2W20	May 9, 2007	1 year
Cable	Rhophase	KPS-5000-KPS	A1674	February 8, 2007	1 year
Cable	Rhophase	KPS-1501-1000	A1675	December 16, 2006	1 year

Figure 242 Test Equipment Used

18. Maximum Conducted Output Power 5 GHz Transmitter 802.11b/g+802.11a + CELL + PCS Signals

18.1 Test procedure

The E.U.T. antenna terminal was connected to the Spectrum Analyzer through an external attenuator (20 dB) and an appropriate coaxial cable (Cable Loss = 1 dB). The Spectrum Analyzer was set to 1.0 MHz resolution BW. Sample detector and maximum hold were used.

The E.U.T. was tested at 5180, 5200, 5240, 5745, 5765, and 5805 MHz with the following modulations: 64QAM (54Mbit/sec) and BPSK (6Mbit/sec).

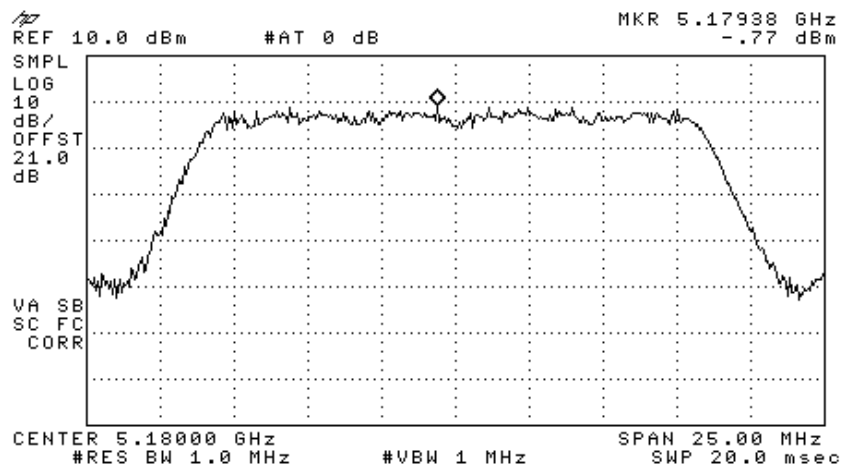


Figure 243 5180 MHz 64QAM

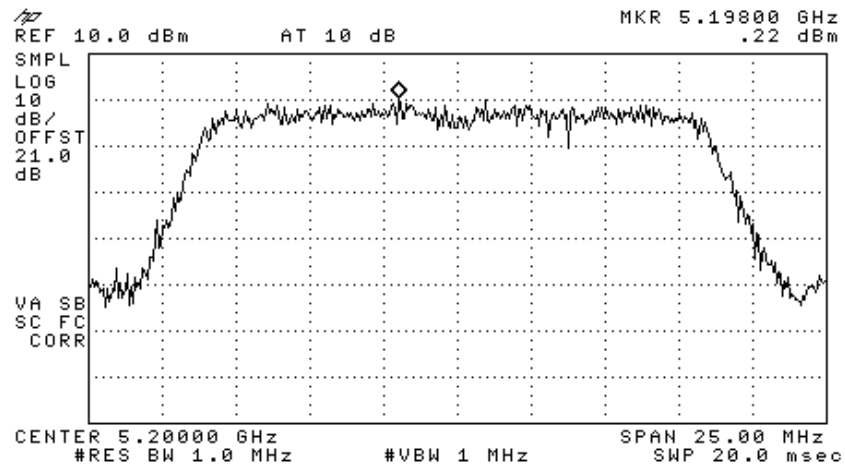


Figure 244 5200 MHz 64QAM

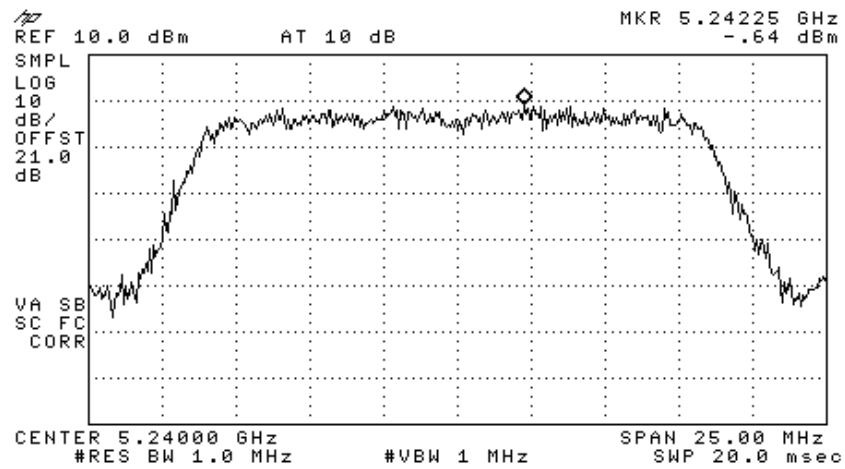


Figure 245 5240 MHz 64QAM

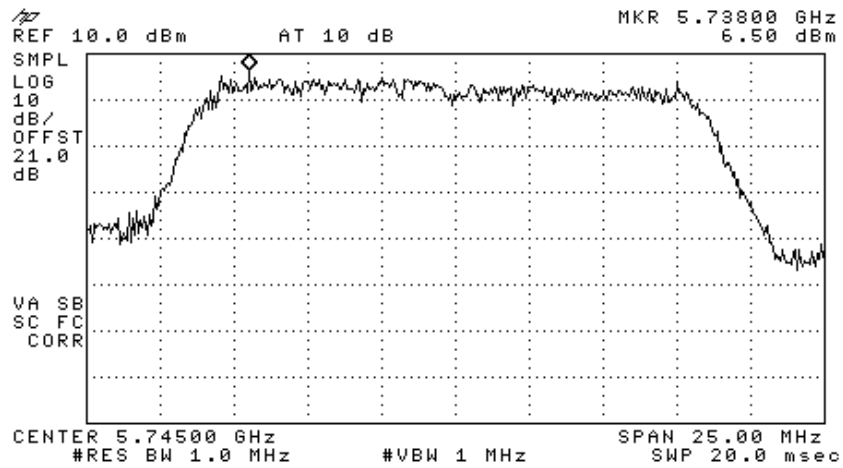


Figure 246 5745 MHz 64QAM

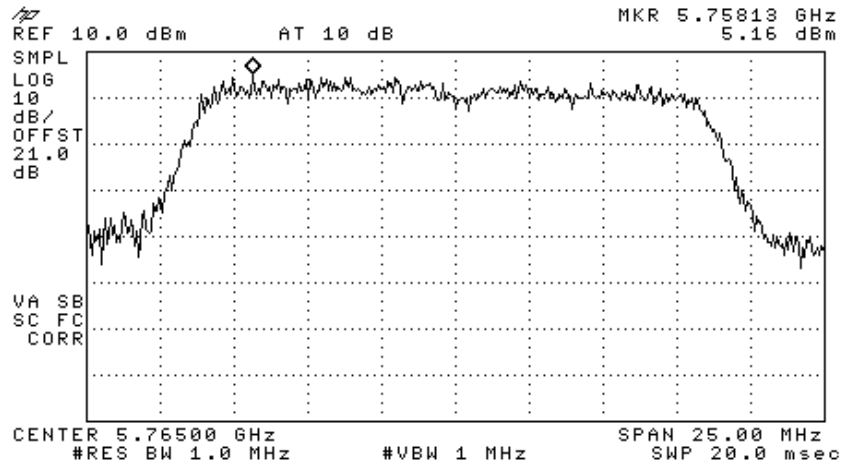


Figure 247 5765 MHz 64QAM

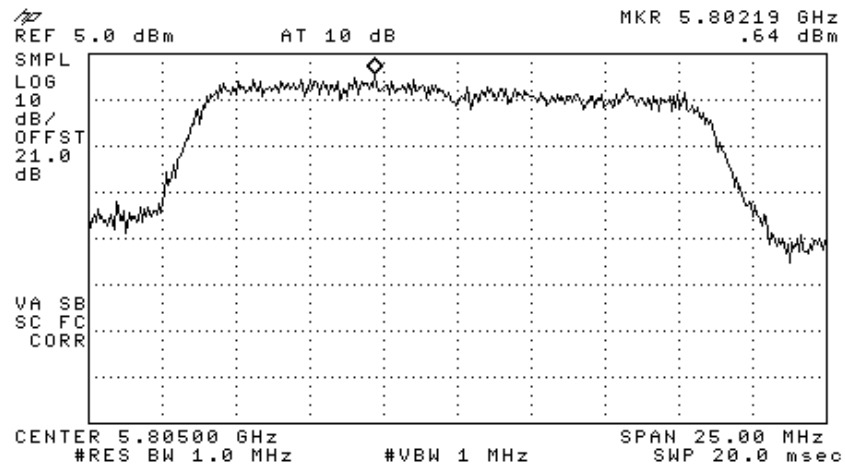


Figure 248 5805 MHz 64QAM

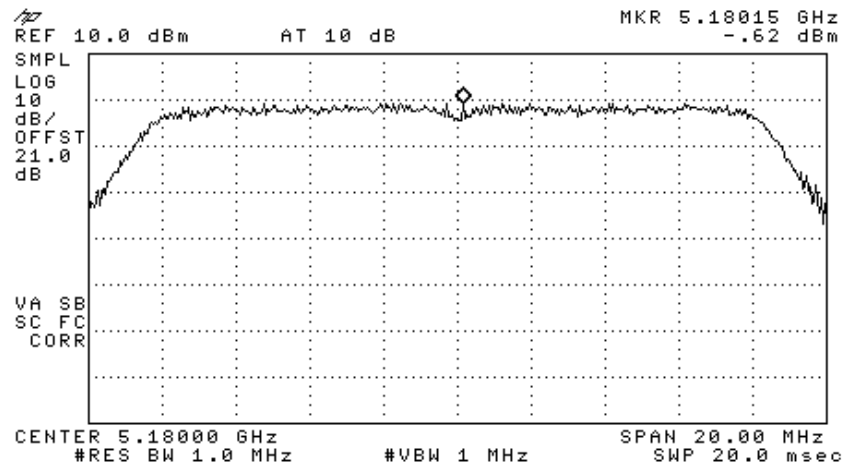


Figure 249 5180 MHz BPSK

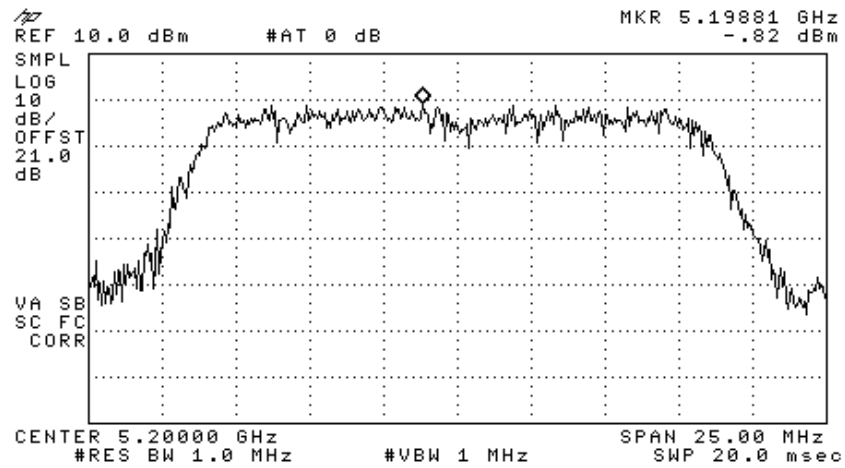


Figure 250 5200 MHz BPSK

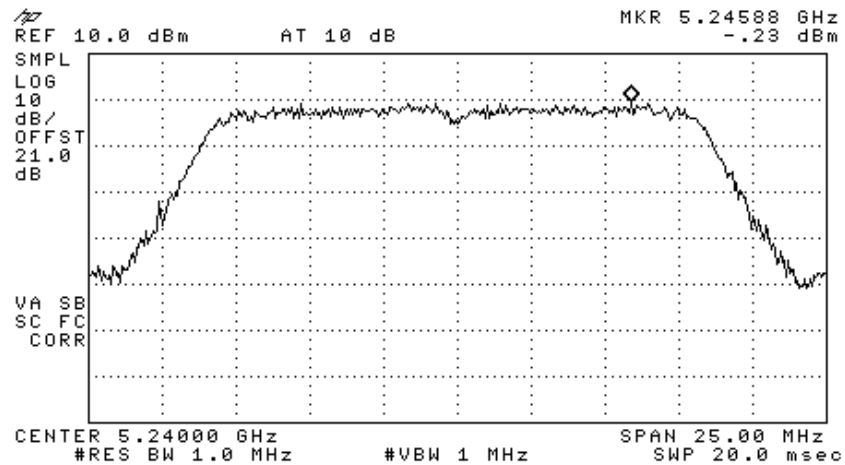


Figure 251 5240 MHz BPSK

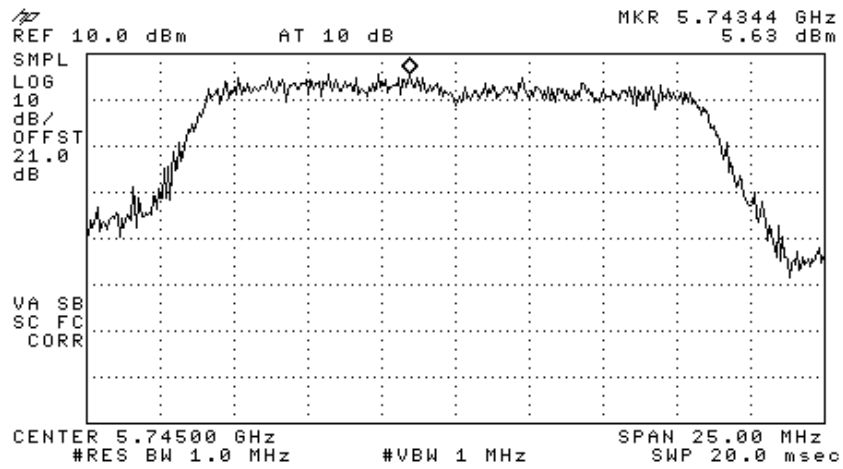


Figure 252 5745 MHz BPSK

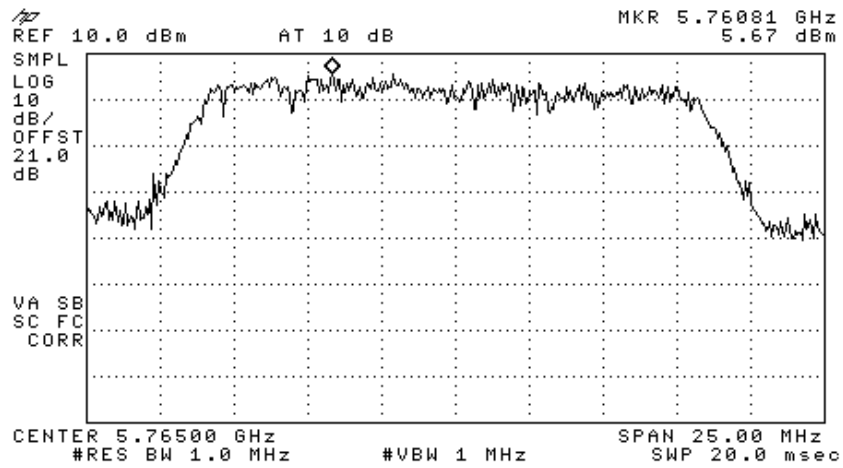


Figure 253 5765 MHz BPSK

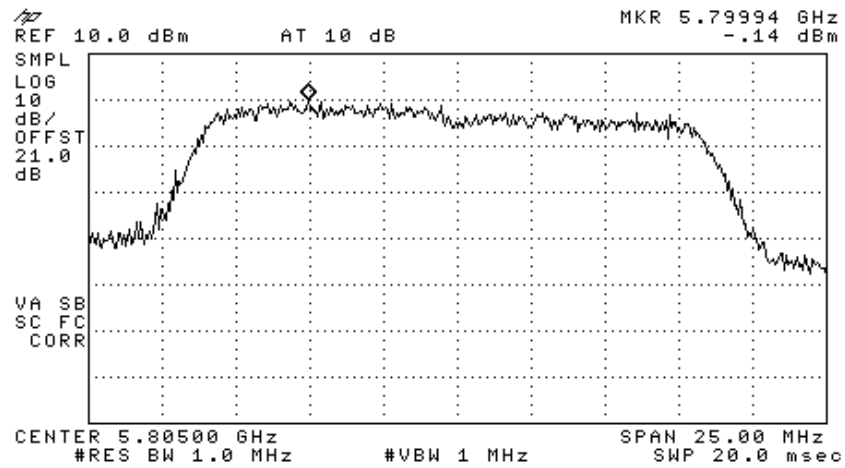


Figure 254 5805 MHz BPSK

18.2 Results table

E.U.T. Description: WLAN Module With WCE (WiFi Coverage Extender) for DAS
With 4 Cisco 1242 Access Points

Model No.: 860M With WCE

Serial Number: 1. 860M: 73903D 2. WCE: 739038

Specification: F.C.C. Part 15, Subpart E

Operation Frequency (MHz)	Modulation	Power (dBm)	Specification (dBm)	Margin (dB)
5180	64QAM	12.05	15.77	-3.72
	BPSK	12.31	15.93	-3.62
5200	64QAM	12.95	15.73	-2.78
	BPSK	12.05	15.87	-3.82
5240	64QAM	12.23	15.70	-3.47
	BPSK	12.71	15.94	-3.23
5745	64QAM	19.30	28.80	-9.50
	BPSK	18.5	28.87	-10.37
5765	64QAM	17.90	28.74	-10.84
	BPSK	18.47	28.8	-10.33
5805	64QAM	13.46	28.82	-15.36
	BPSK	12.68	28.82	-16.14

Figure 255 Maximum Peak Power Output

Note: Antenna Gain is 7 dBi

Peak Output Power = Reading + 10log EBW

For 5.18; 5.20, 5.24 GHz Peak Output Power Limit = 4 + 10log EBW – (Antenna Gain –6)

For 5.745; 5.765, 5.805 GHz Peak Output Power Limit = 17 + 10log EBW – (Antenna Gain –6)

JUDGEMENT: Passed by 2.78 dB

TEST PERSONNEL:

Tester Signature: E. Pitt

Date: 05.02.08

Typed/Printed Name: E. Pitt

18.3 Test Equipment Used.

Peak Power Output

Instrument	Manufacturer	Model	Serial/Part Number	Calibration	
				Last Calibr.	Period
Spectrum Analyzer	HP	8592L	3826A01204	February 22, 2007	1 year
Attenuator	Jyebao	-	FAT-AM5AF5G6G2W20	May 9, 2007	1 year
Cable	Rhophase	KPS-5000-KPS	A1674	February 8, 2007	1 year

Figure 256 Test Equipment Used

19. Peak Power Spectral Density 5GHz Transmitter 802.11b/g+802.11a + CELL + PCS Signals

[In accordance with section 15.407(a)]

19.1 Test procedure

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator (20dB) and an appropriate coaxial cable (Cable Loss = 1 dB). The spectrum analyzer was set to 1 MHz resolution BW. and 1 MHz video BW. The spectrum peaks were located at at 5180, 5200, 5240, 5745, 5765, and 5805 MHz with the following modulations: 64QAM (54Mbit/sec) and BPSK (6Mbit/sec).

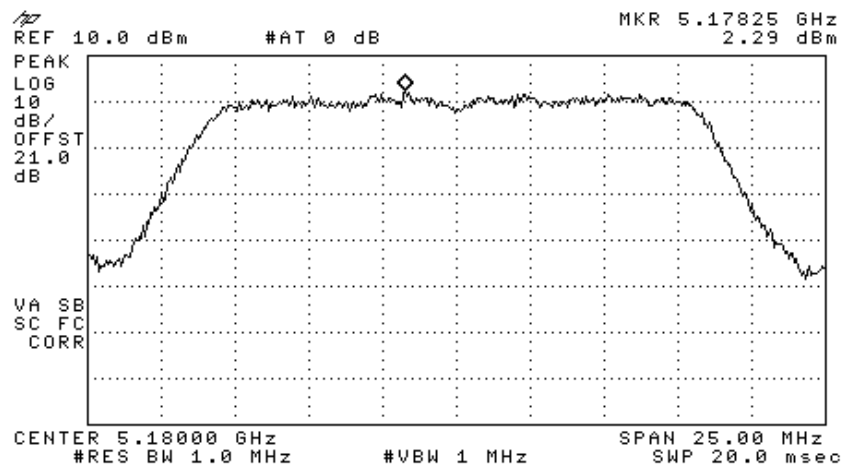


Figure 257 —5180 MHz 64QAM

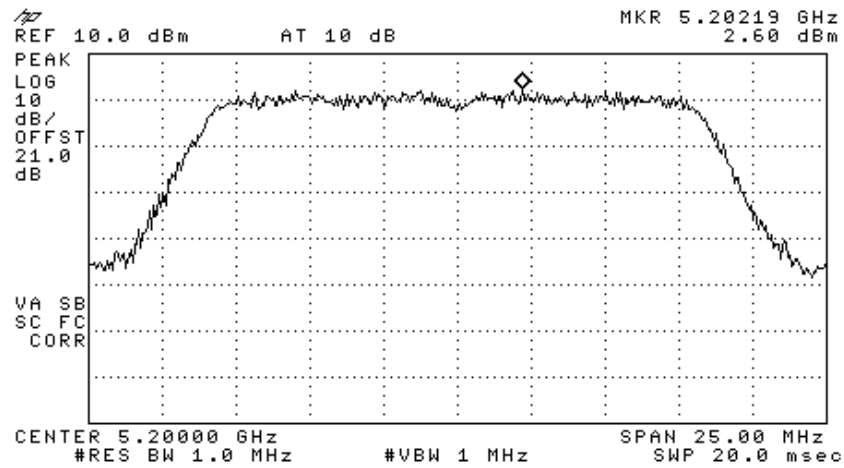


Figure 258 —5200 MHz 64QAM

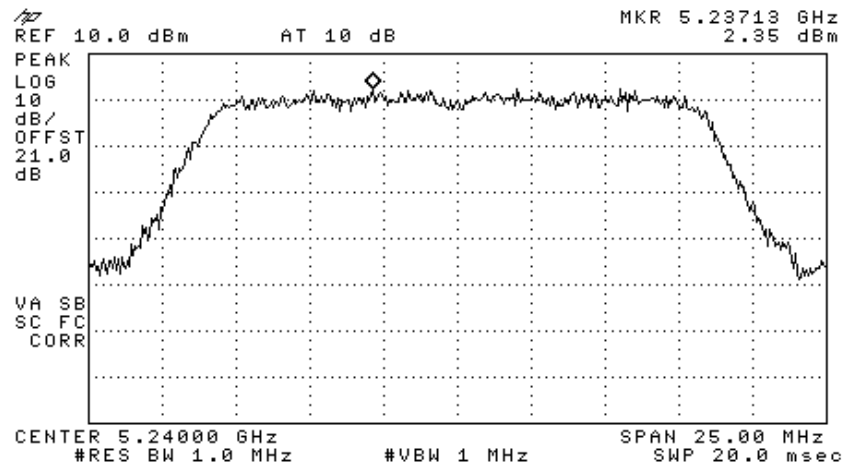


Figure 259 —5240 MHz 64QAM

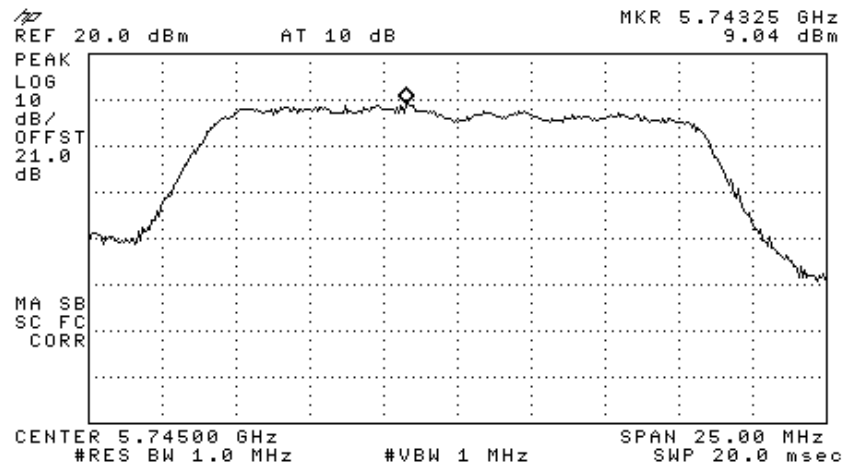


Figure 260 —5745 MHz 64QAM

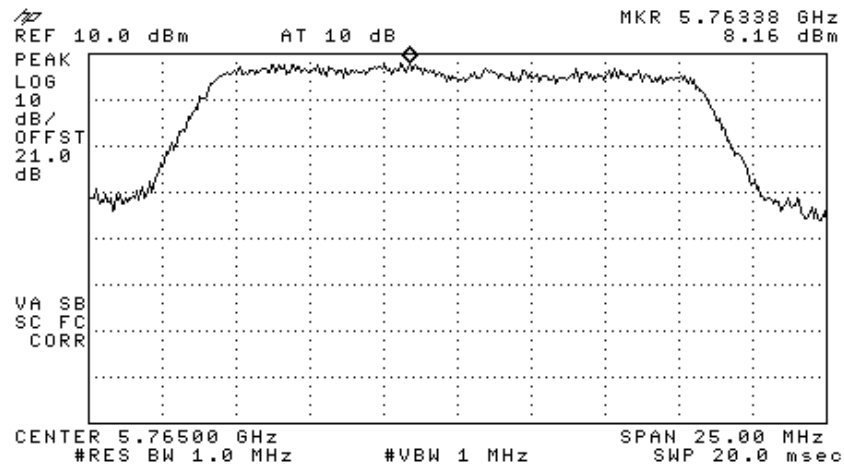


Figure 261 —5765 MHz 64QAM

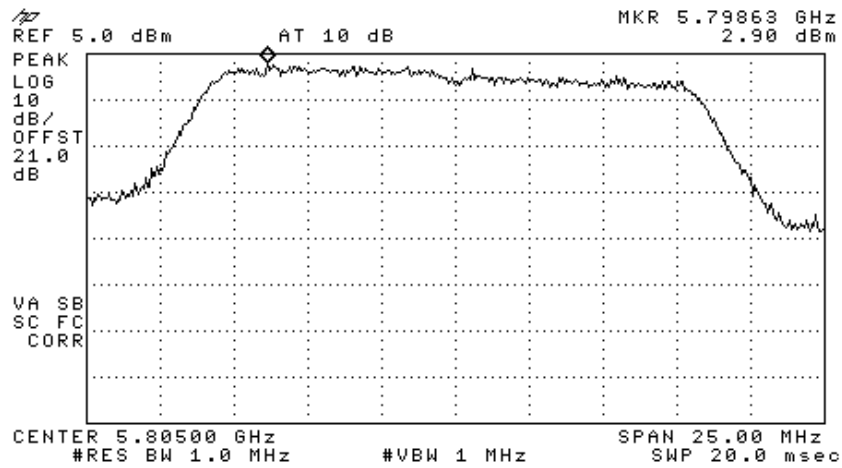


Figure 262 —5805 MHz 64QAM

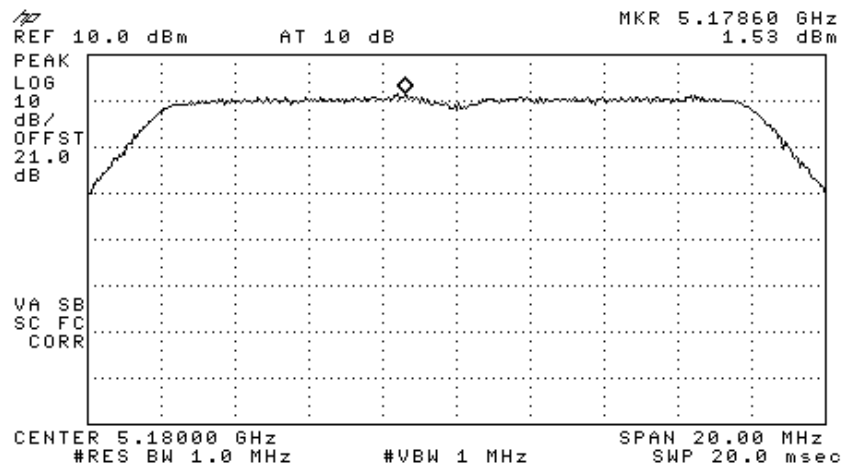


Figure 263 —5180 MHz BPSK

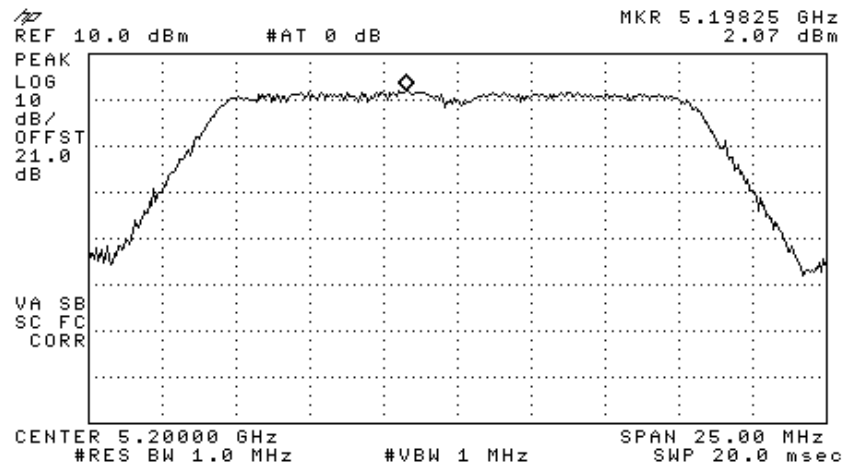


Figure 264 —5200 MHz BPSK

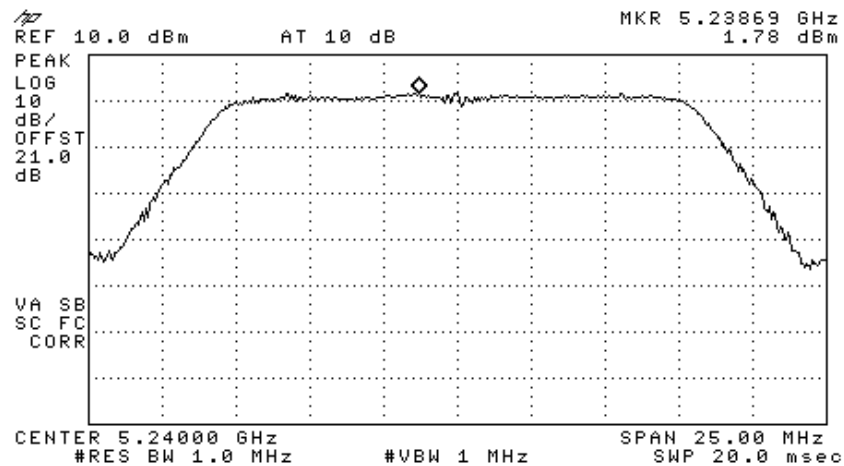


Figure 265 —5240 MHz BPSK

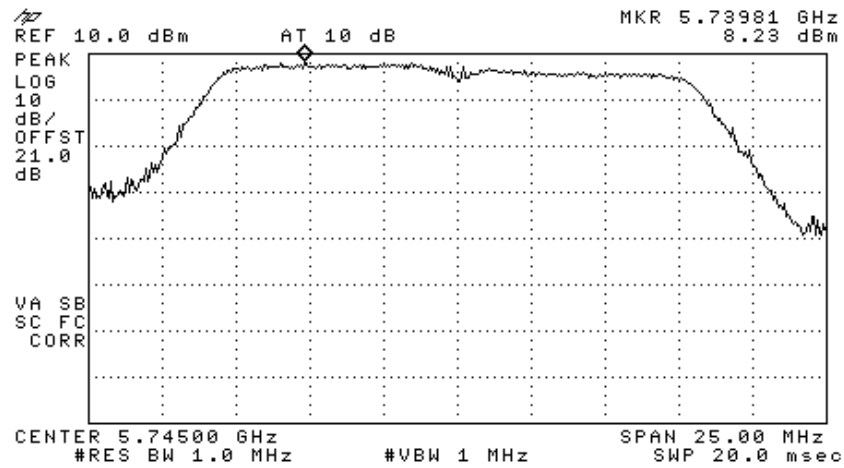


Figure 266 —5745 MHz BPSK

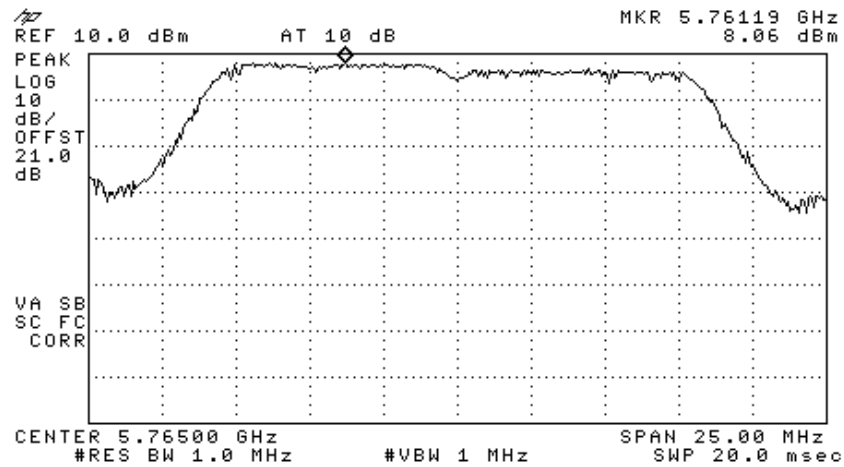


Figure 267 —5765 MHz BPSK

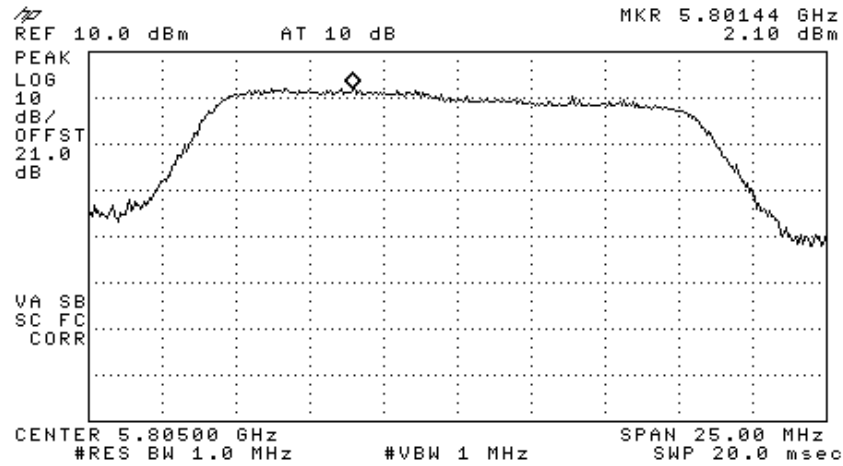


Figure 268 —5805 MHz BPSK

19.2 Results table

E.U.T. Description: WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Cisco 1242 Access Points

Model No.: 860M With WCE

Serial Number: 1. 860M: 73903D 2. WCE: 739038

Specification: F.C.C. Part 15, Subpart E (15.407(a))

Operation Frequency (MHz)	Modulation	Reading Spectrum Analyzer (dBm)	Specification (dBm)	Margin (dB)
5180	64QAM	2.29	3	-0.71
	BPSK	1.53	3	-1.47
5200	64QAM	2.60	3	-0.40
	BPSK	2.07	3	-0.93
5240	64QAM	2.35	3	-0.65
	BPSK	1.78	3	-1.22
5745	64QAM	9.04	16	-6.96
	BPSK	8.23	16	-7.77
5765	64QAM	8.16	16	-7.84
	BPSK	8.06	16	-7.94
5805	64QAM	2.9	16	-13.1
	BPSK	2.1	16	-13.9

Figure 269 Test Results

JUDGEMENT:

Passed by 0.71 dB

TEST PERSONNEL:

Tester Signature: 

Date: 05.02.08

Typed/Printed Name: E. Pitt

19.3 Test Equipment Used.

Peak Power Spectral Density

Instrument	Manufacturer	Model	Serial/Part Number	Calibration	
				Last Calibr.	Period
Spectrum Analyzer	HP	8592L	3826A01204	February 22, 2007	1 year
Attenuator	Jyebao	-	FAT-AM5AF5G6G2W20	May 9, 2007	1 year
Cable	Rhophase	KPS-5000-KPS	A1674	February 8, 2007	1 year

Figure 270 Test Equipment Used

20. Ratio of Peak Excursion of Modulation Envelope to Maximum Conducted Output Power 5GHz Transmitter 802.11b/g+802.11a + CELL + PCS Signals

[In accordance with section 15.407(a)(6)]

20.1 Test procedure

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator (20dB) and an appropriate coaxial cable (Cable Loss = 1 dB). The spectrum analyzer was set to 1 MHz resolution BW. and 1 MHz video BW.

Trace A: Sample Detector

Trace B: Peak Detector

The E.U.T. was tested at 5180, 5200, 5240, 5745, 5765, and 5805 MHz with the following modulations: 64QAM (54Mbit/sec) and BPSK (6Mbit/sec).

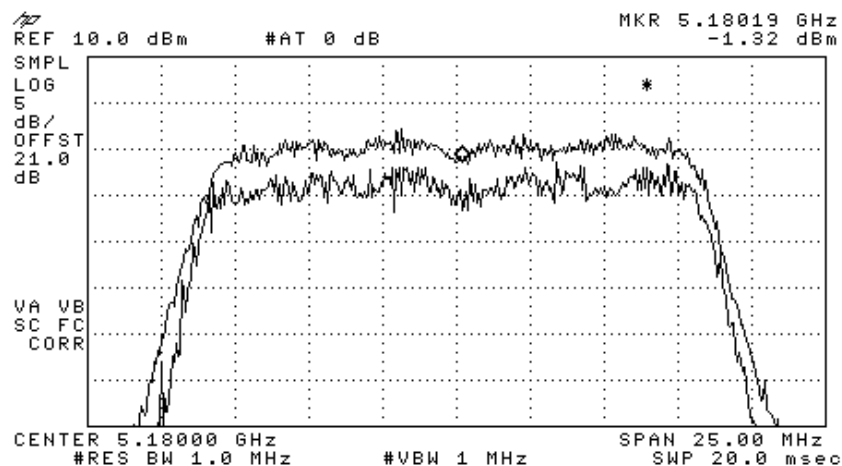


Figure 271 —5180 MHz 64QAM

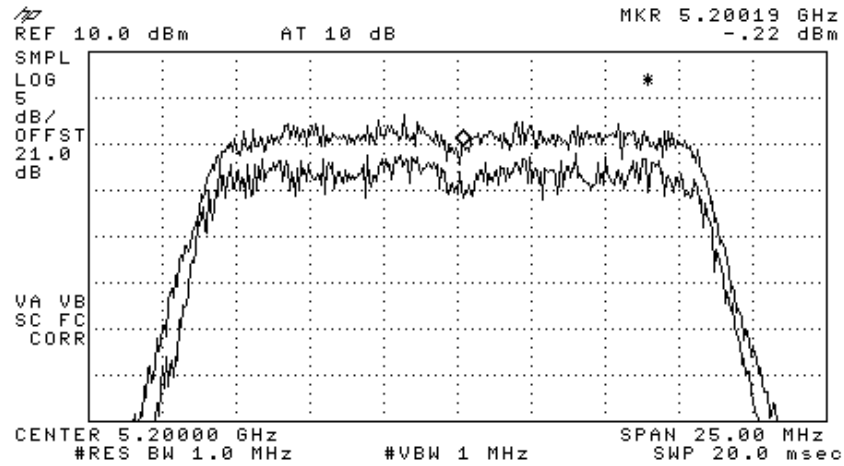


Figure 272 —5200 MHz 64QAM

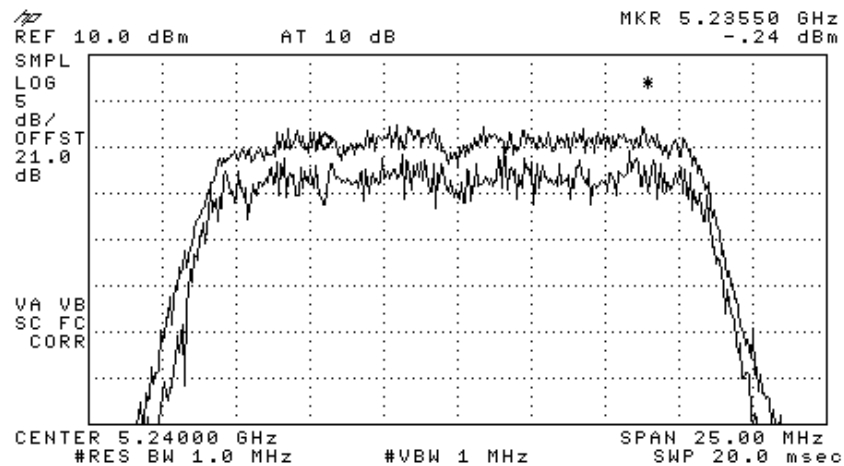


Figure 273 —5240 MHz 64QAM

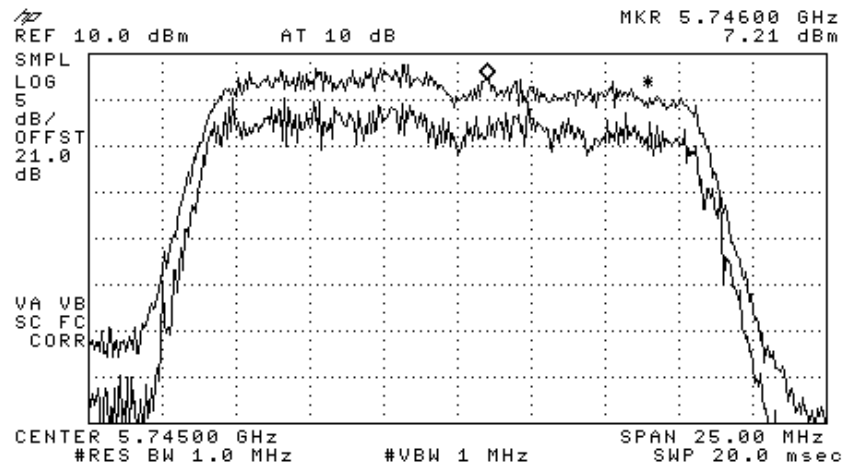


Figure 274 —5745 MHz 64QAM

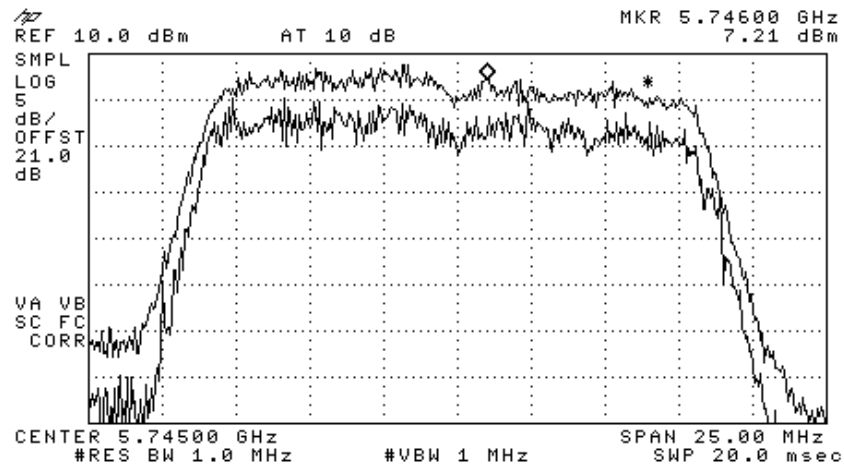


Figure 275 —5765 MHz 64QAM

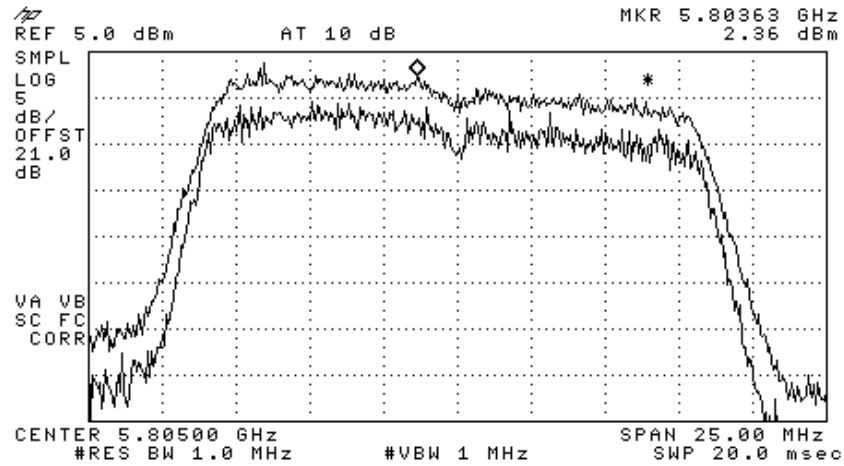


Figure 276 —5805 MHz 64QAM

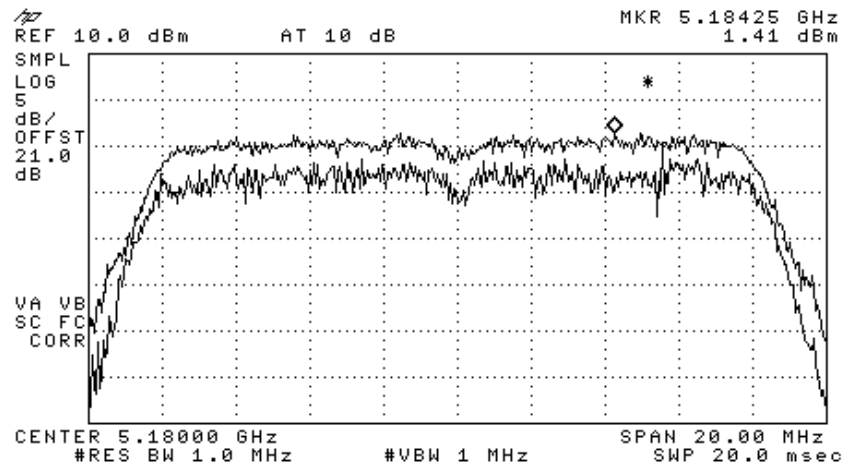


Figure 277 —5180 MHz BPSK

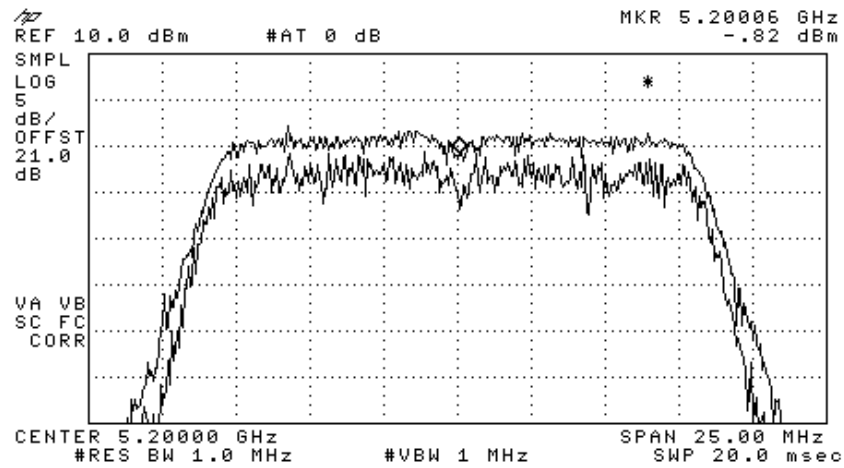


Figure 278 —5200 MHz BPSK

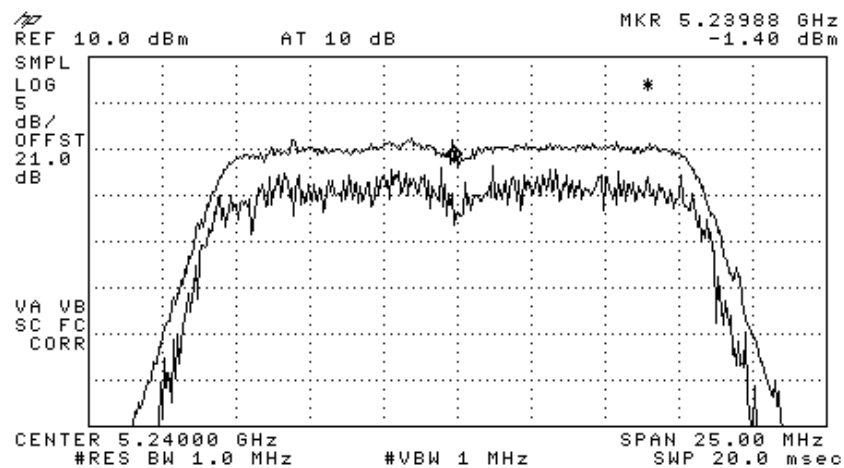


Figure 279 —5240 MHz BPSK

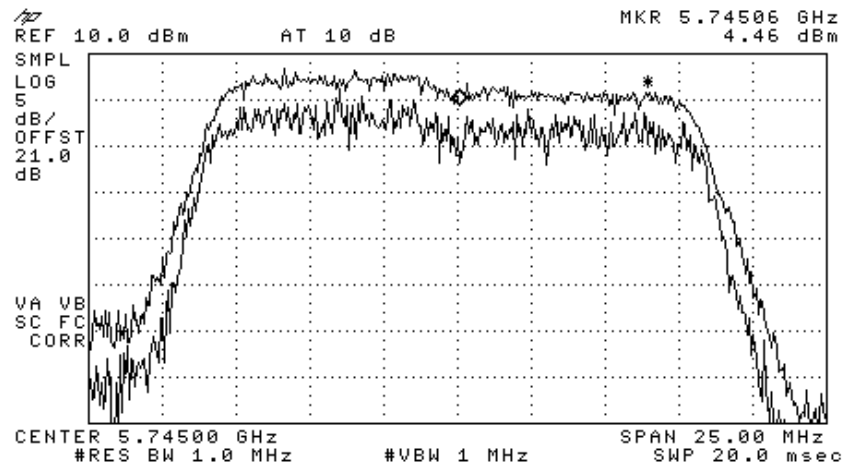


Figure 280 —5745 MHz BPSK

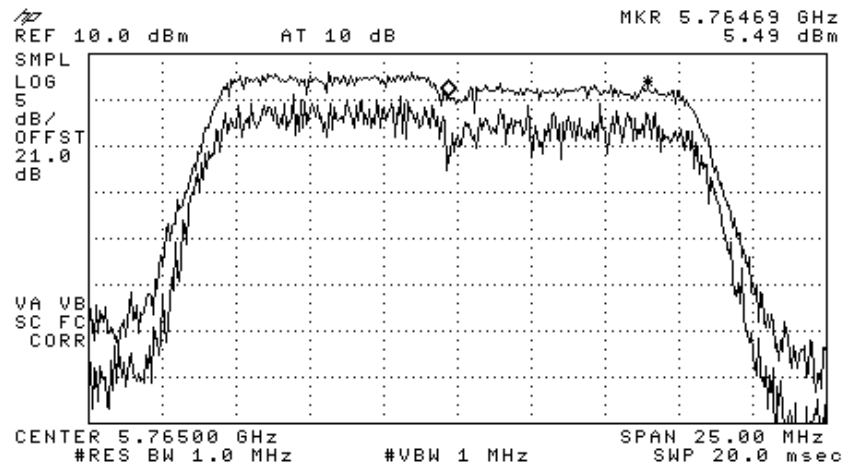


Figure 281 —5765 MHz BPSK

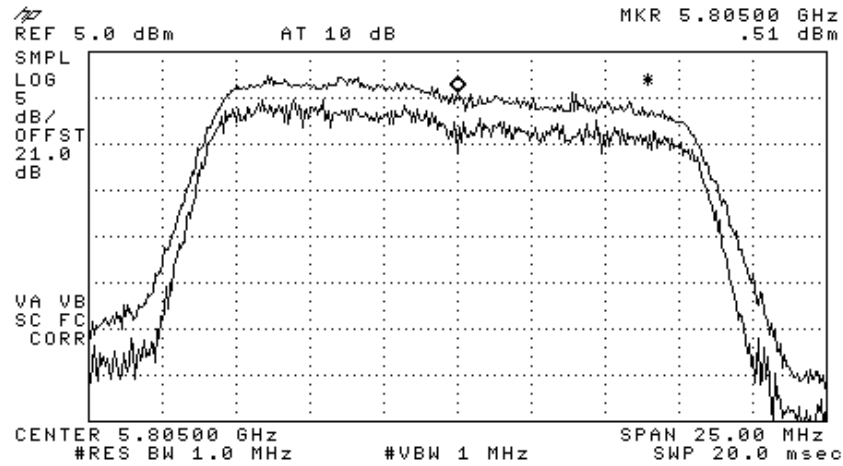


Figure 282 —5805 MHz BPSK

20.2 Results table

E.U.T. Description: WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Cisco 1242 Access Points

Model No.: 860M With WCE

Serial Number: 1. 860M: 73903D 2. WCE: 739038

Specification: F.C.C. Part 15, Subpart E (15.407(a)(6))

Operation Frequency (MHz)	Modulation	Delta (dB)	Specification (dB)	Margin (dB)
5180	64QAM	5.30	13	-7.70
	BPSK	5.90	13	-7.10
5200	64QAM	5.65	13	-7.35
	BPSK	6.00	13	-7.00
5240	64QAM	6.00	13	-7.00
	BPSK	6.80	13	-6.20
5745	64QAM	5.8	13	-7.20
	BPSK	6.2	13	-6.80
5765	64QAM	6.4	13	-6.60
	BPSK	6.4	13	-6.60
5805	64QAM	5.3	13	-7.70
	BPSK	6.3	13	-6.70

Figure 283 Test Results



JUDGEMENT: Passed by 6.60 dB

TEST PERSONNEL:

Tester Signature: 

Date: 05.02.08

Typed/Printed Name: E. Pitt

20.3 Test Equipment Used.

Peak Power Spectral Density

Instrument	Manufacturer	Model	Serial/Part Number	Calibration	
				Last Calibr.	Period
Spectrum Analyzer	HP	8592L	3826A01204	February 22, 2007	1 year
Attenuator	Jyebao	-	FAT-AM5AF5G6G2W20	May 9, 2007	1 year
Cable	Rhophase	KPS-5000-KPS	A1674	February 8, 2007	1 year

Figure 284 Test Equipment Used

21. Peak Power Output Out of 5150-5250; 5725-5825 MHz Bands 5 GHz Transmitter 802.11b/g+802.11a + CELL + PCS Signals

21.1 Test procedure

The E.U.T. antenna terminal was connected to the spectrum analyzer through an appropriate coaxial cable. The spectrum analyzer was set to 1 MHz resolution BW except for the frequency range 9 kHz-150 kHz where the RBW was set to 1kHz and the frequency range 150 kHz-10.0 MHz where the RBW was set to 10kHz. The frequency range from 9 kHz to 40 GHz was scanned. Level of spectrum components out of the 5150-5250; 5725-5825 MHz bands was measured at the selected operation frequencies.

The E.U.T. was tested at 5180, 5200, 5240, 5745, 5765, and 5805 MHz with the following modulations: 64QAM (54Mbit/sec) and BPSK (6Mbit/sec).

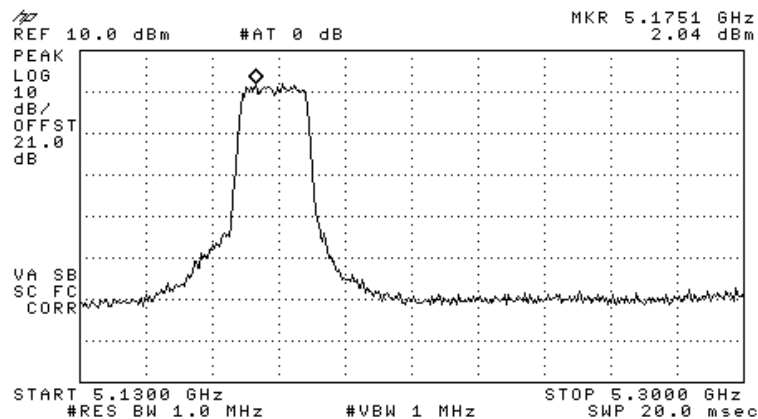


Figure 285 —5180 MHz 64QAM

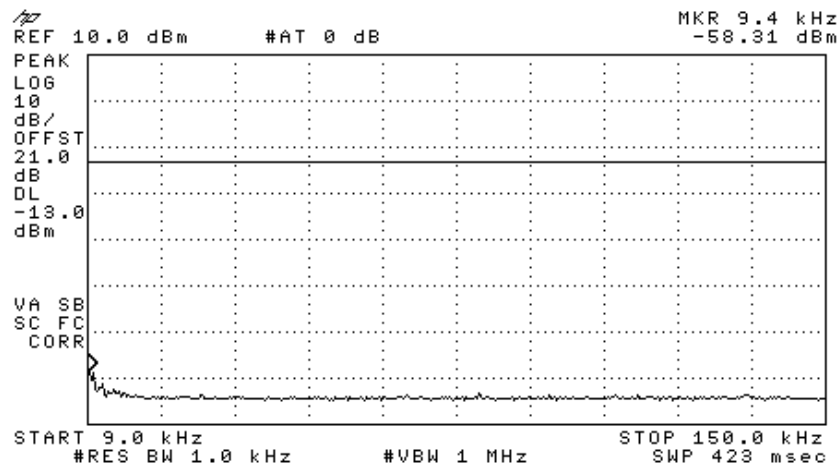


Figure 286 —5180 MHz 64QAM

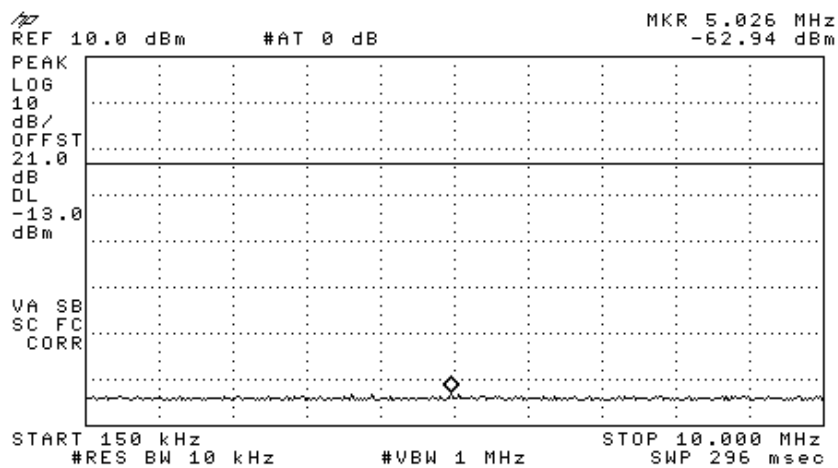


Figure 287 —5180 MHz 64QAM

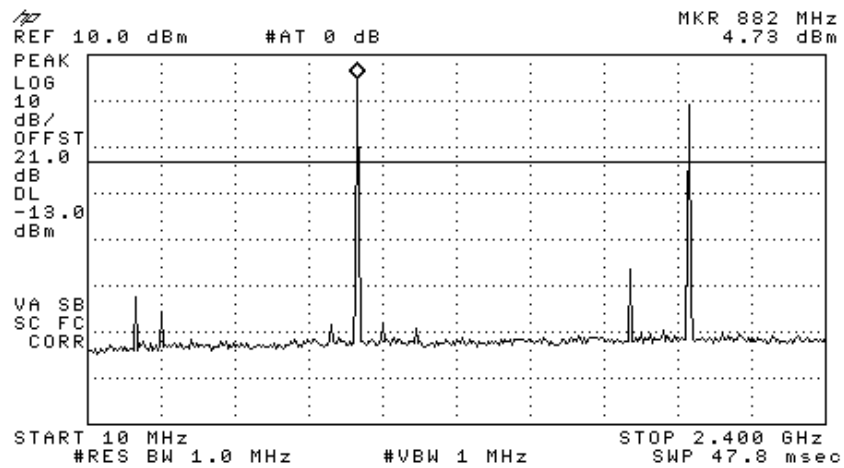


Figure 288 —5180 MHz 64QAM

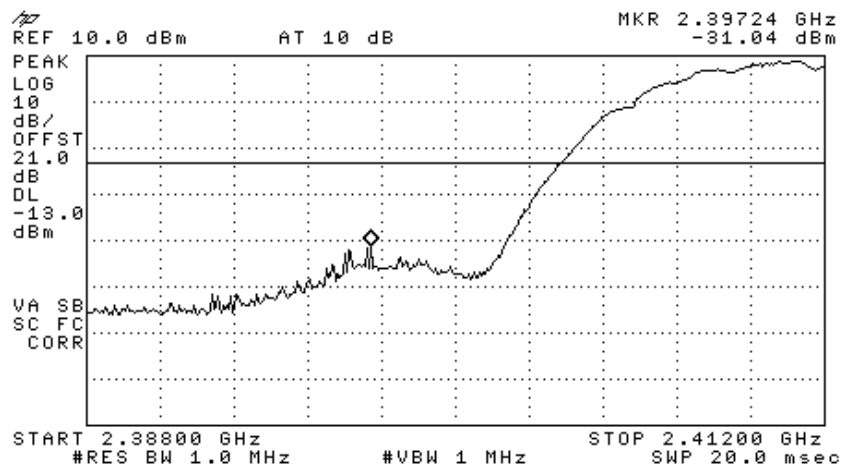


Figure 289 —5180 MHz 64QAM

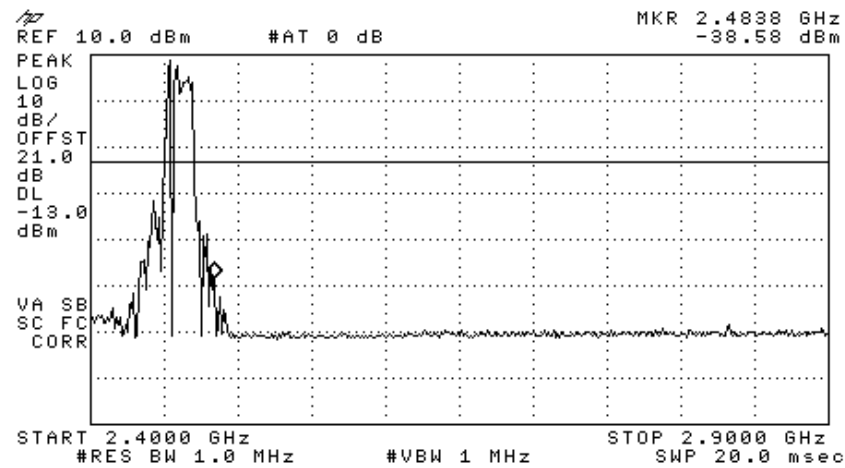


Figure 290 —5180 MHz 64QAM

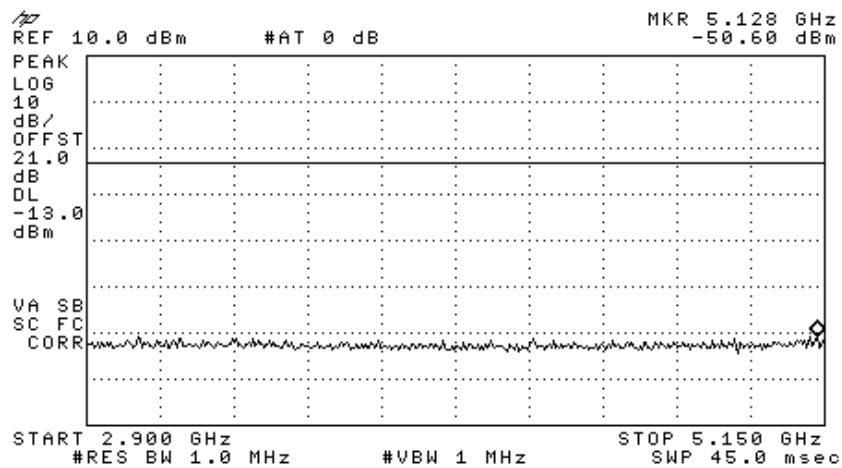


Figure 291 —5180 MHz 64QAM

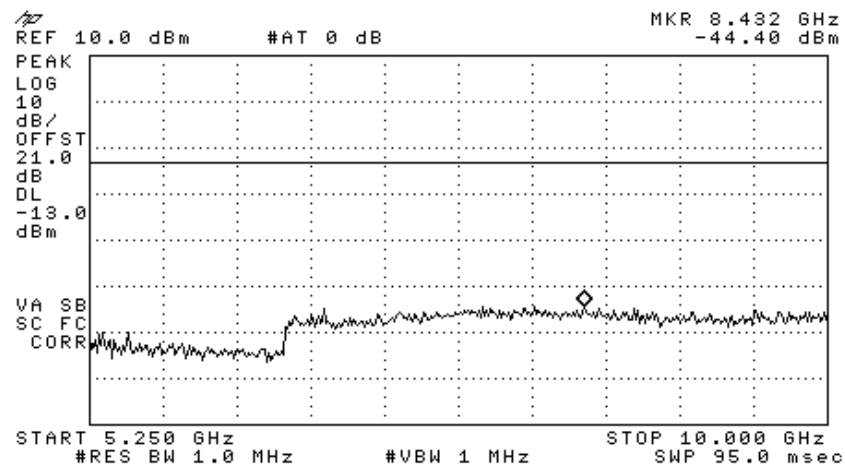


Figure 292 —5180 MHz 64QAM

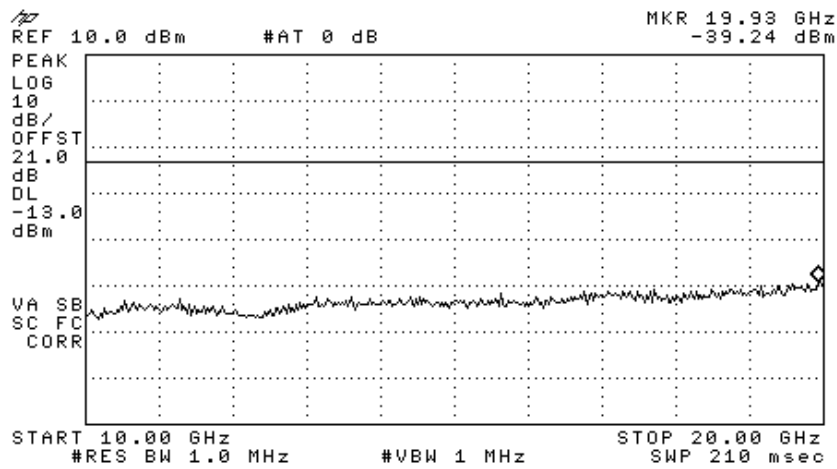


Figure 293 —5180 MHz 64QAM

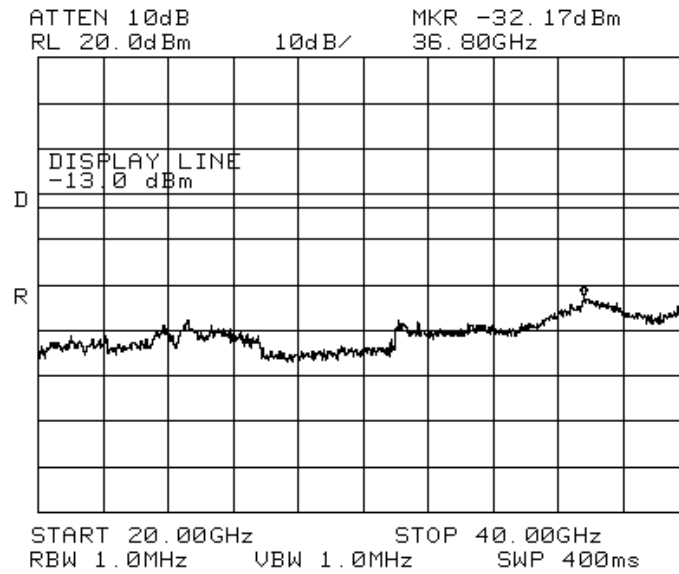


Figure 294 —5180 MHz 64QAM

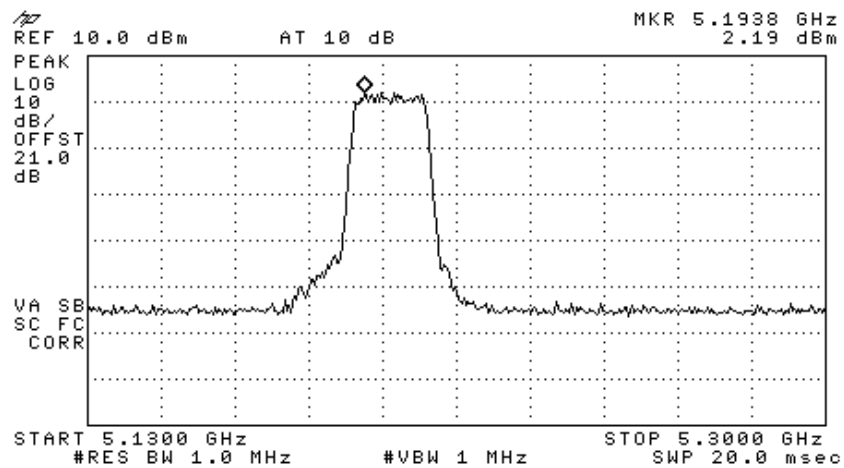


Figure 295 —5200 MHz 64QAM

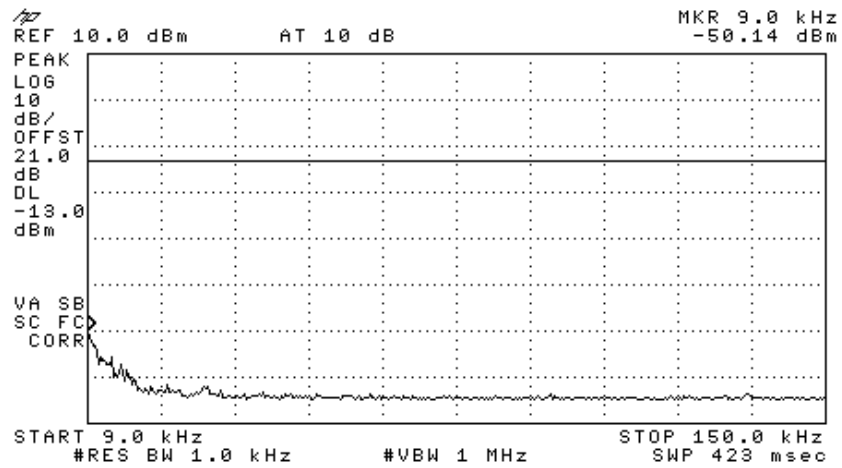


Figure 296 —5200 MHz 64QAM

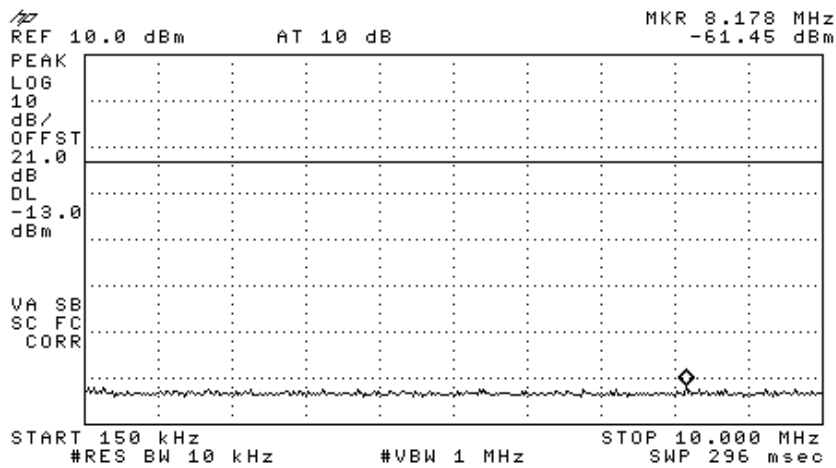


Figure 297 —5200 MHz 64QAM

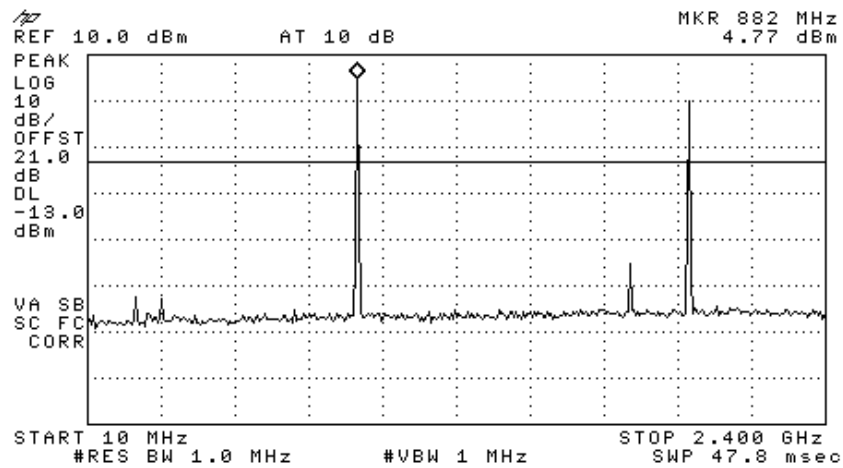


Figure 298 —5200 MHz 64QAM

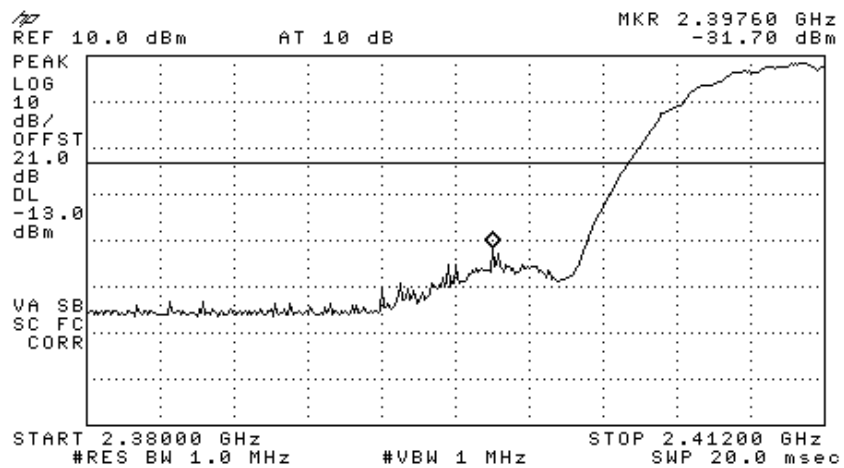


Figure 299 —5200 MHz 64QAM

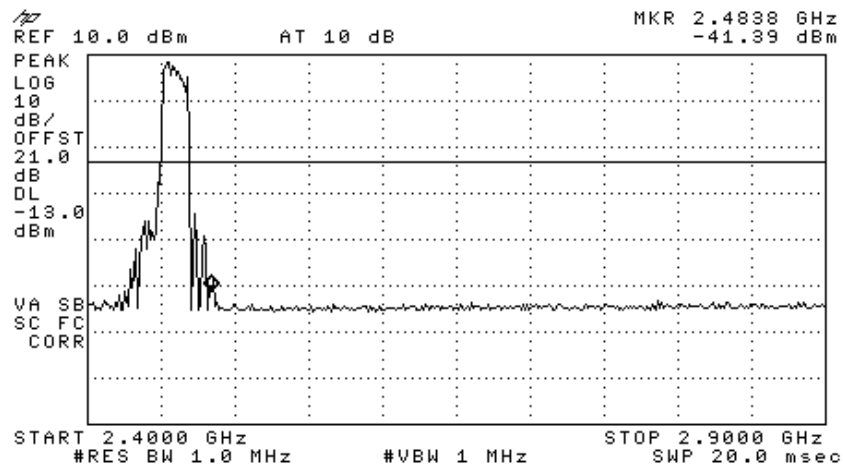


Figure 300 —5200 MHz 64QAM

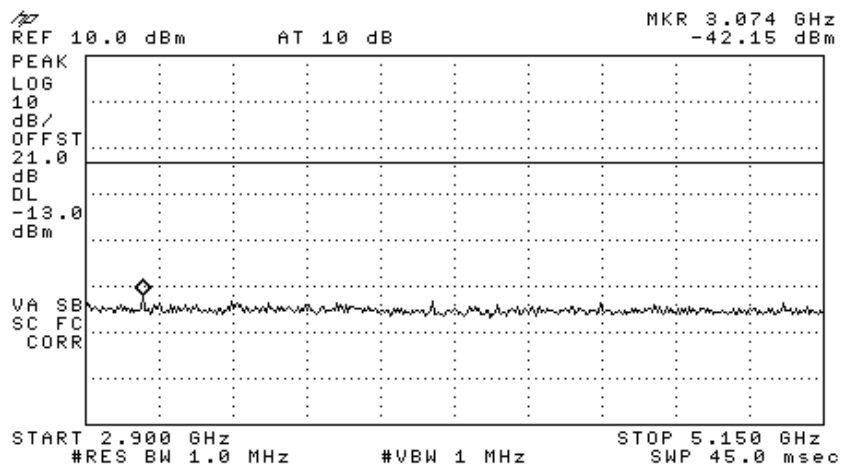


Figure 301 —5200 MHz 64QAM

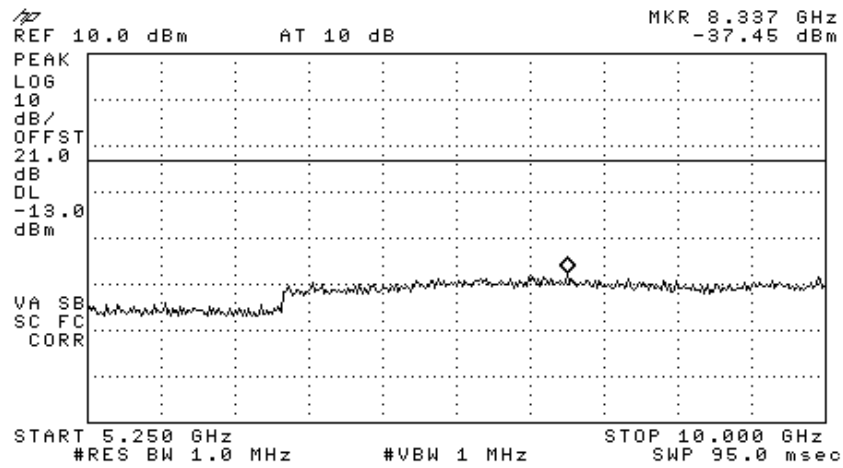


Figure 302 —5200 MHz 64QAM

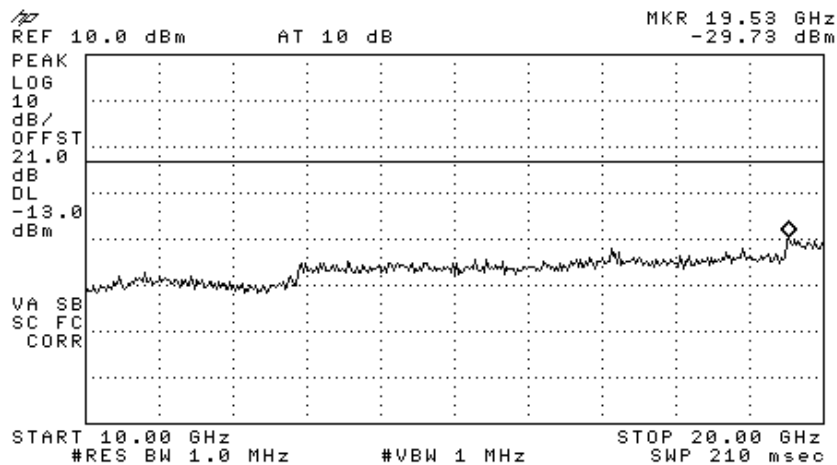


Figure 303 —5200 MHz 64QAM

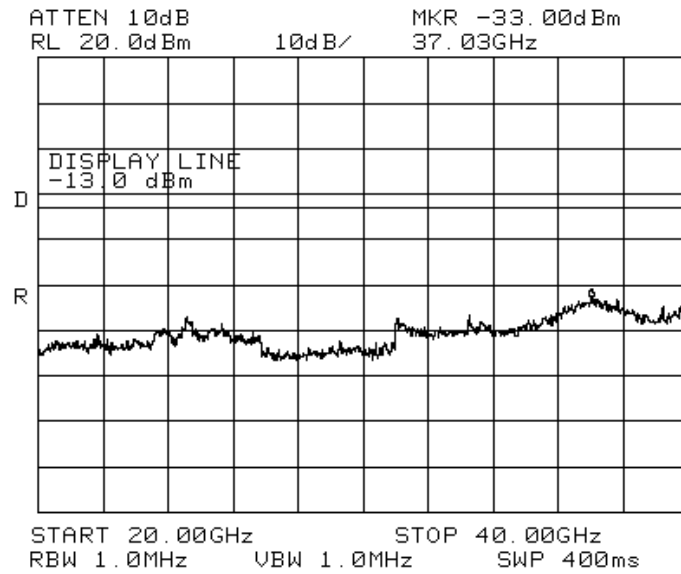


Figure 304 —5200 MHz 64QAM

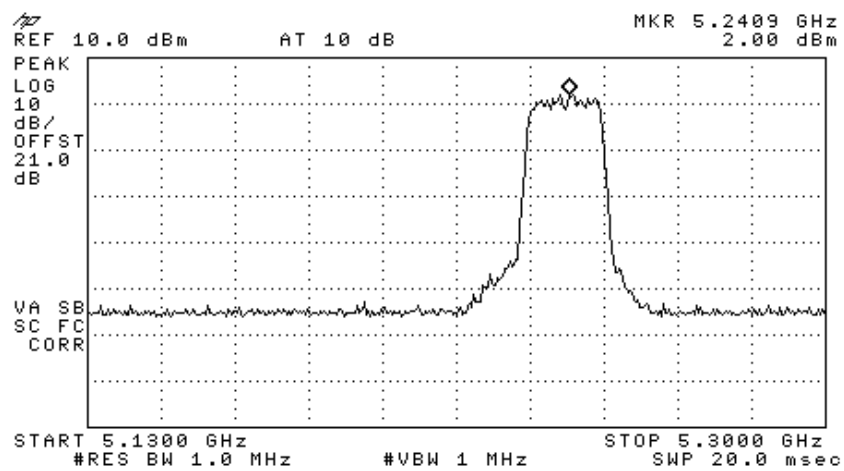


Figure 305 —5240 MHz 64QAM

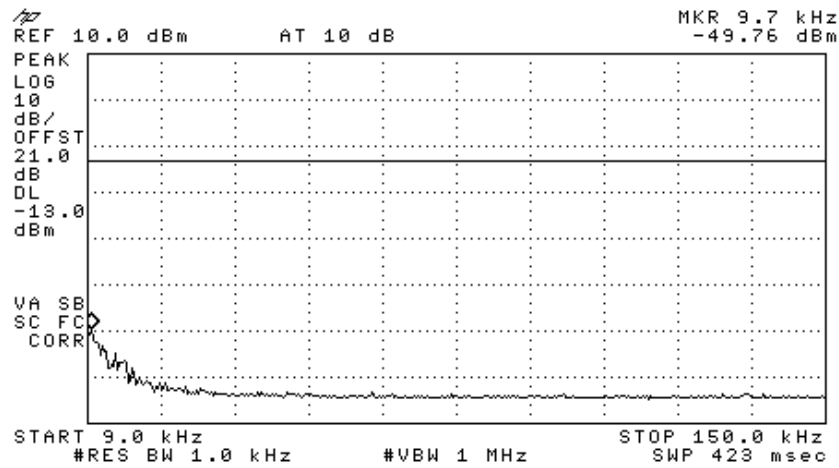


Figure 306 —5240 MHz 64QAM

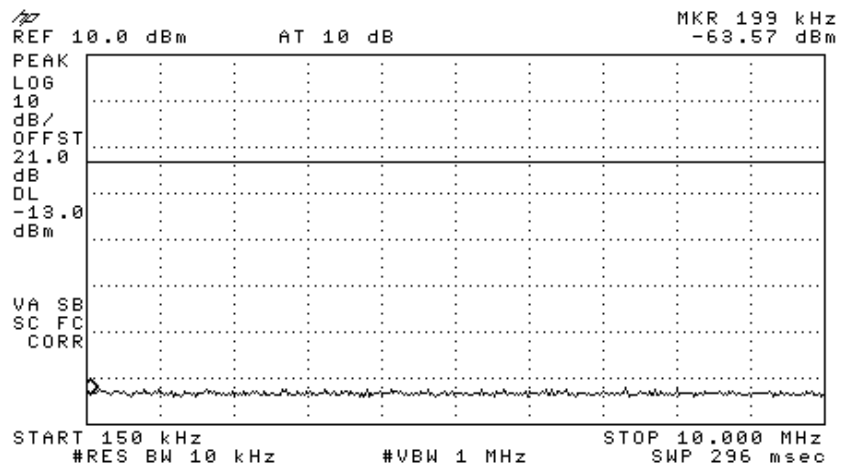


Figure 307 —5240 MHz 64QAM

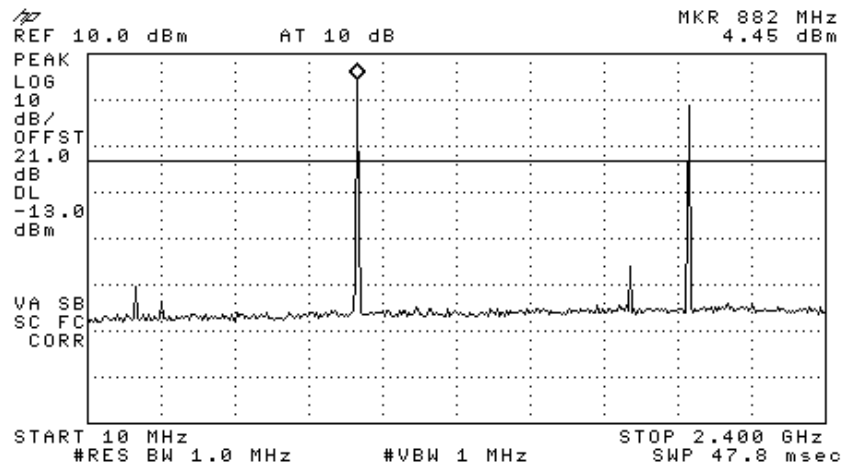


Figure 308 —5240 MHz 64QAM

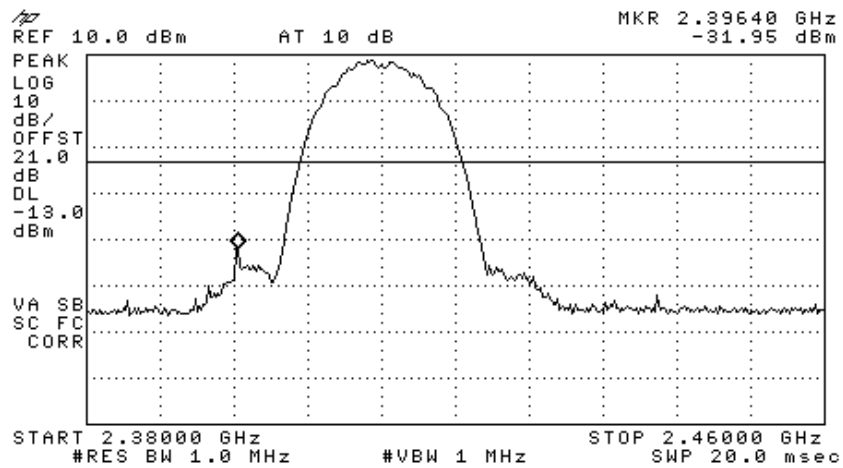


Figure 309 —5240 MHz 64QAM

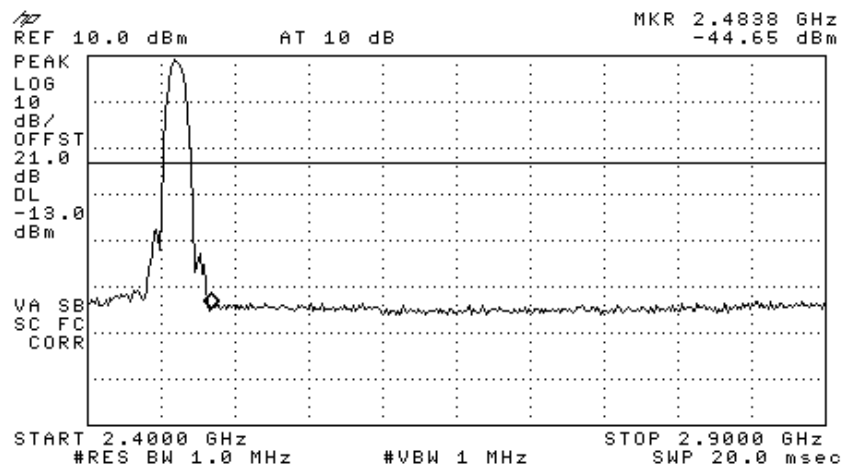


Figure 310 —5240 MHz 64QAM

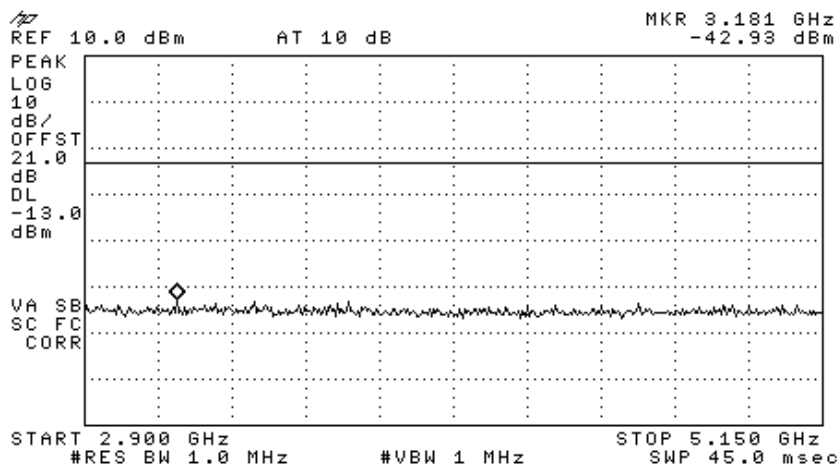


Figure 311 —5240 MHz 64QAM

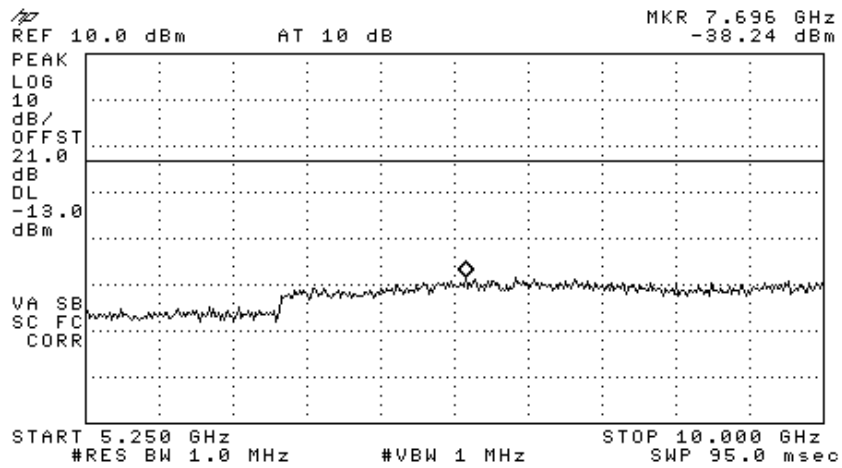


Figure 312 —5240 MHz 64QAM

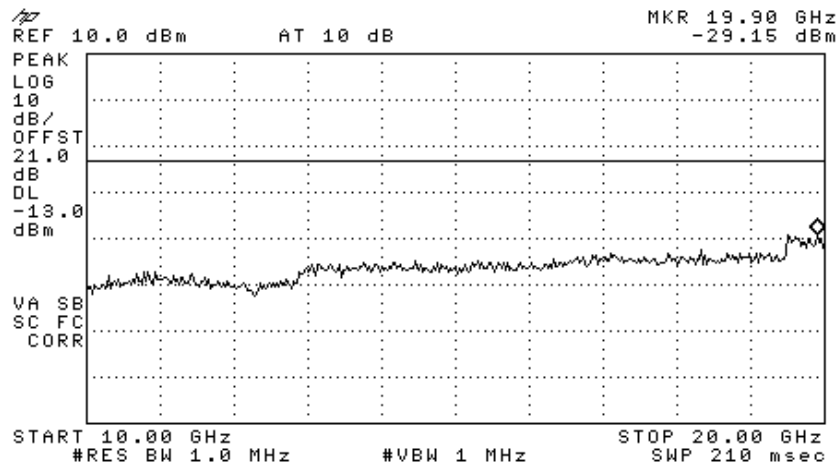


Figure 313 —5240 MHz 64QAM

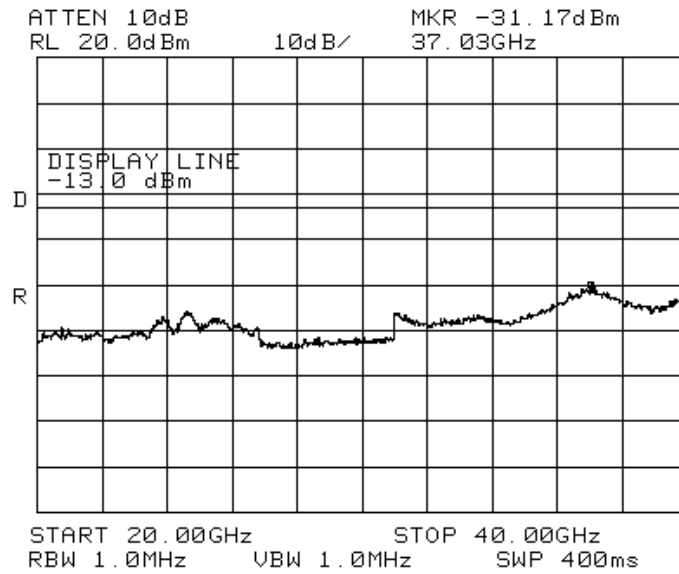


Figure 314 —5240 MHz 64QAM

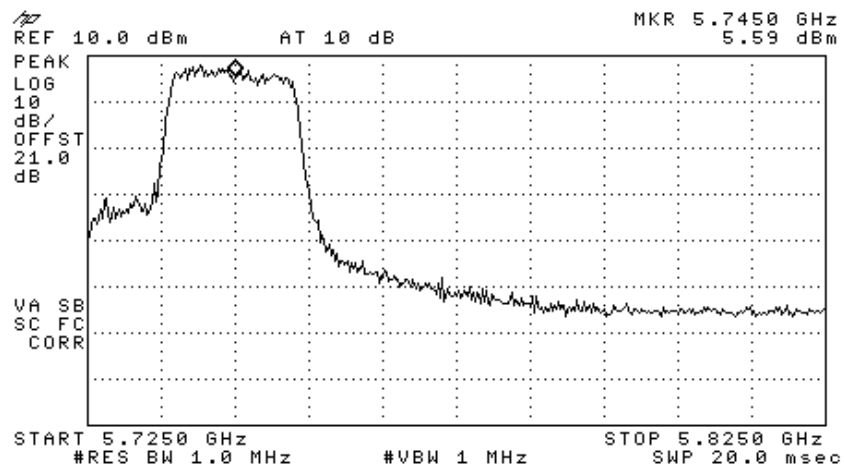


Figure 315 —5745 MHz 64QAM

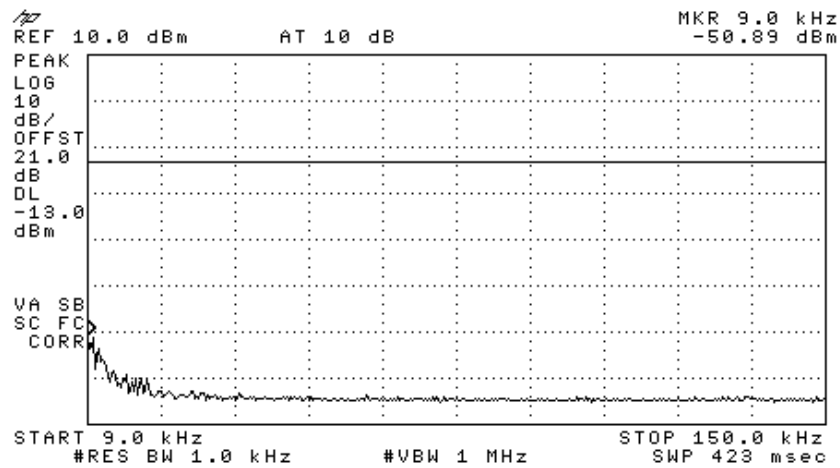


Figure 316 —5745 MHz 64QAM

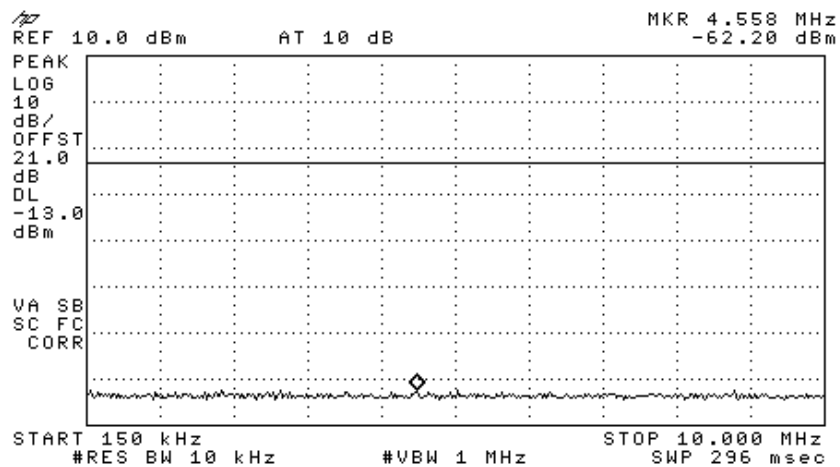


Figure 317 —5745 MHz 64QAM

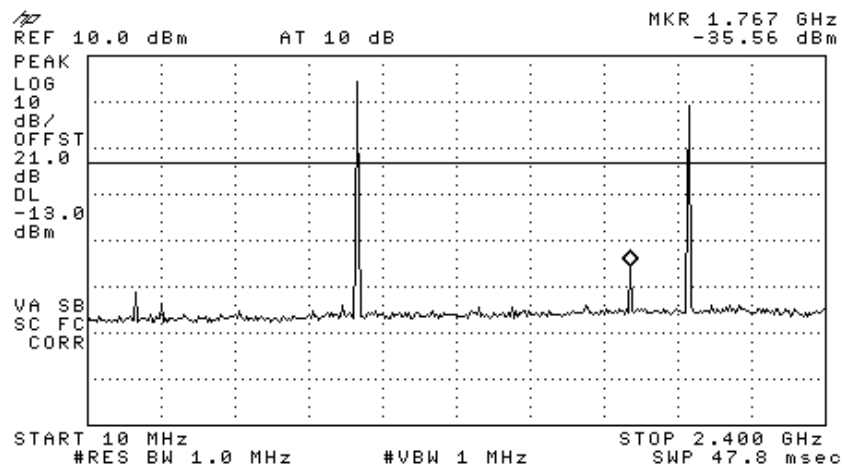


Figure 318 —5745 MHz 64QAM

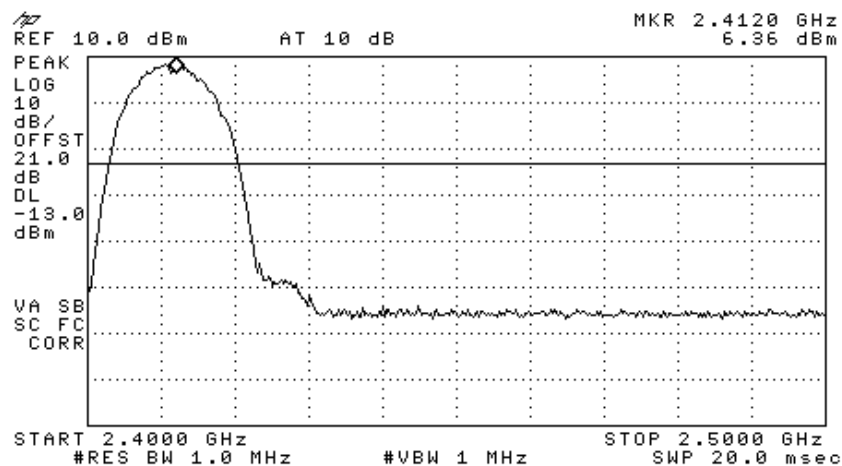


Figure 319 —5745 MHz 64QAM

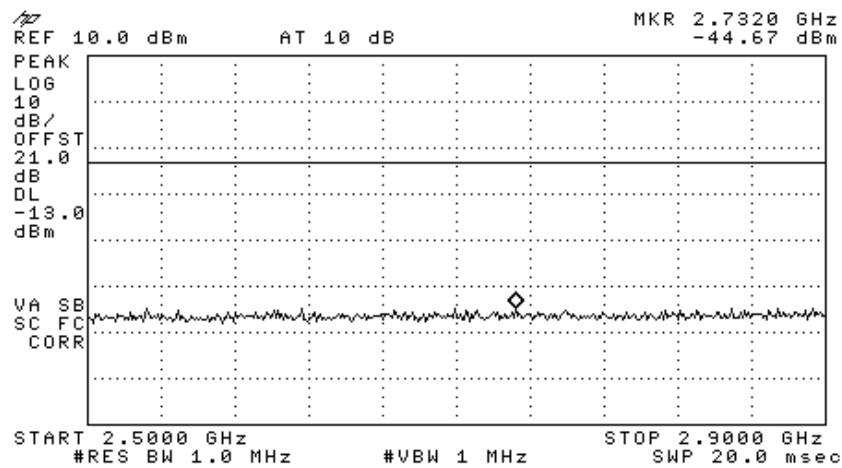


Figure 320 —5745 MHz 64QAM

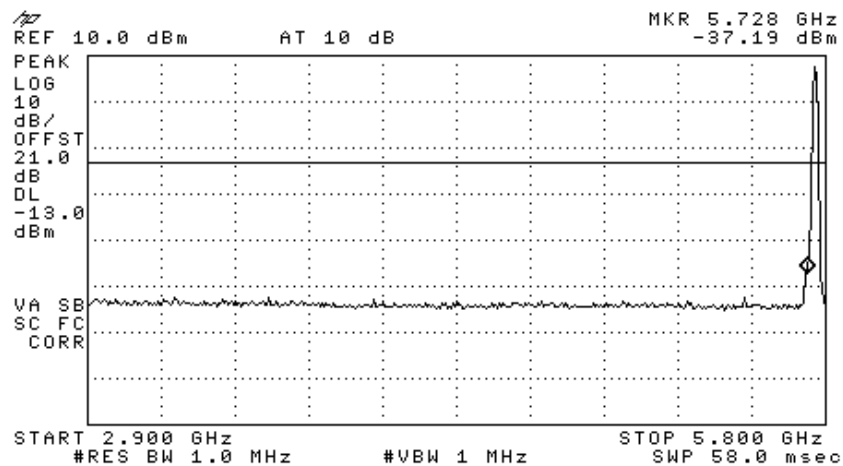


Figure 321 —5745 MHz 64QAM

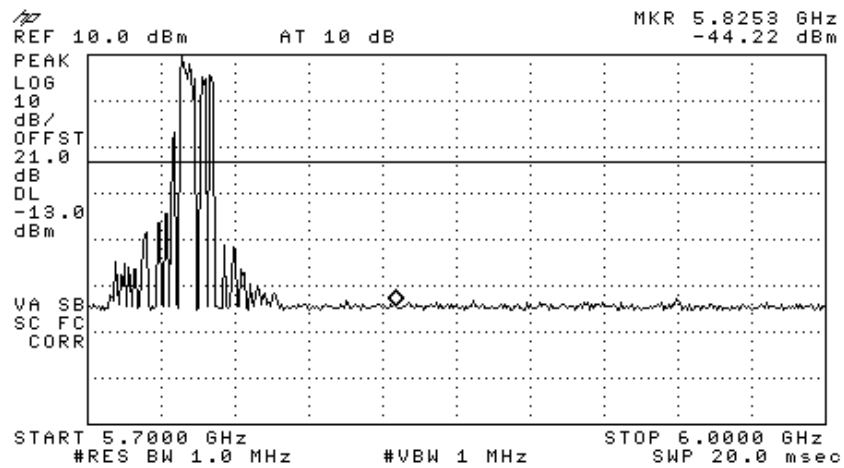


Figure 322 —5745 MHz 64QAM

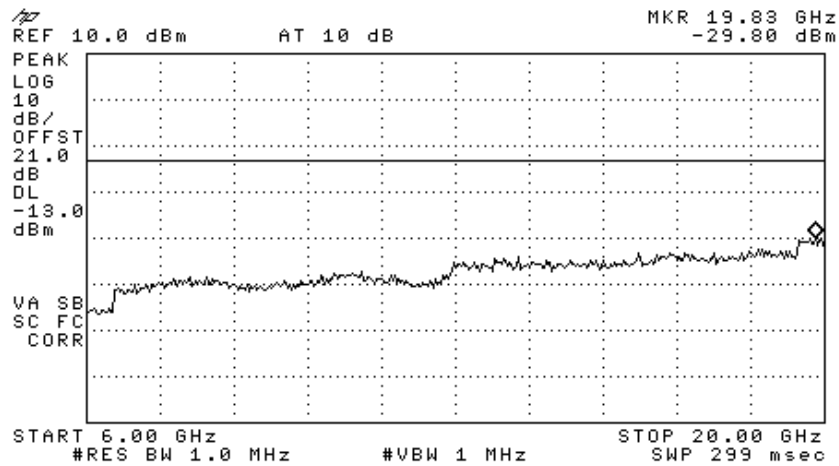


Figure 323 —5745 MHz 64QAM

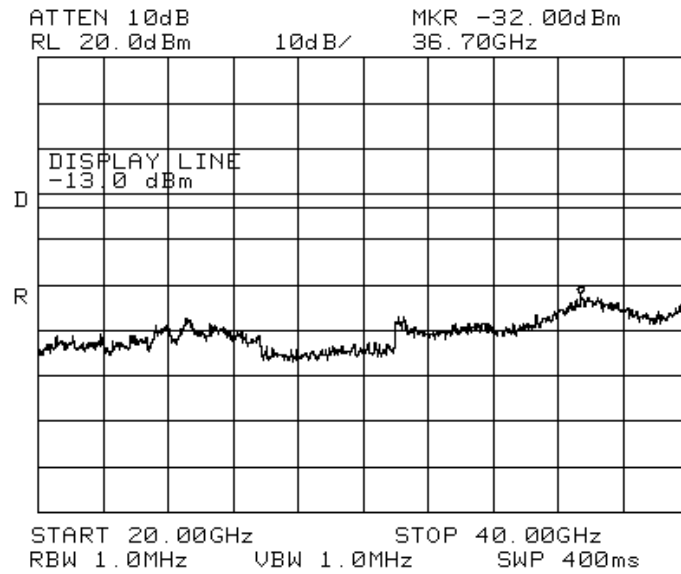


Figure 324 —5745 MHz 64QAM

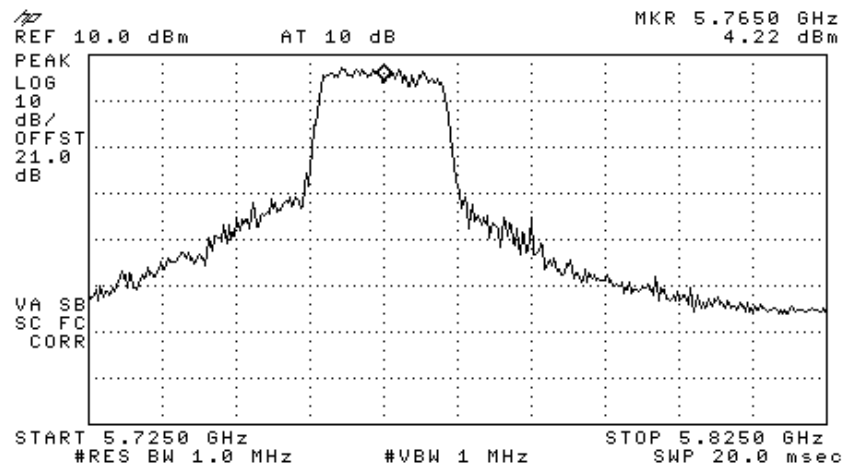


Figure 325 —5765 MHz 64QAM

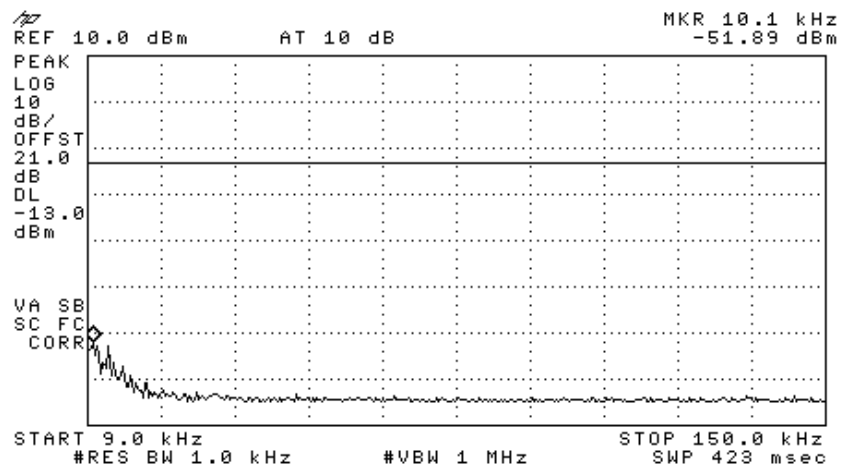


Figure 326 —5765 MHz 64QAM

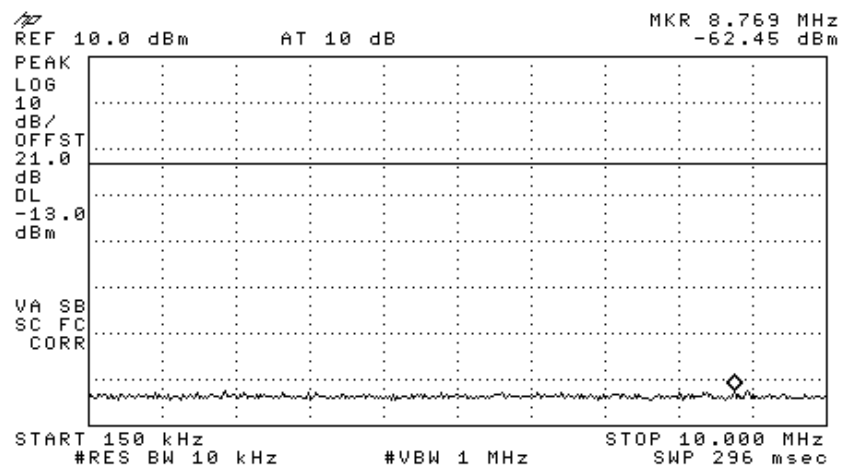


Figure 327 —5765 MHz 64QAM

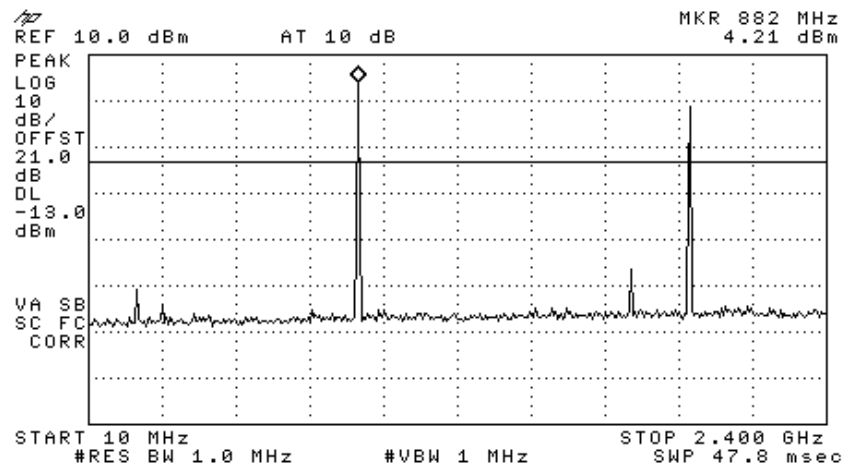


Figure 328 —5765 MHz 64QAM

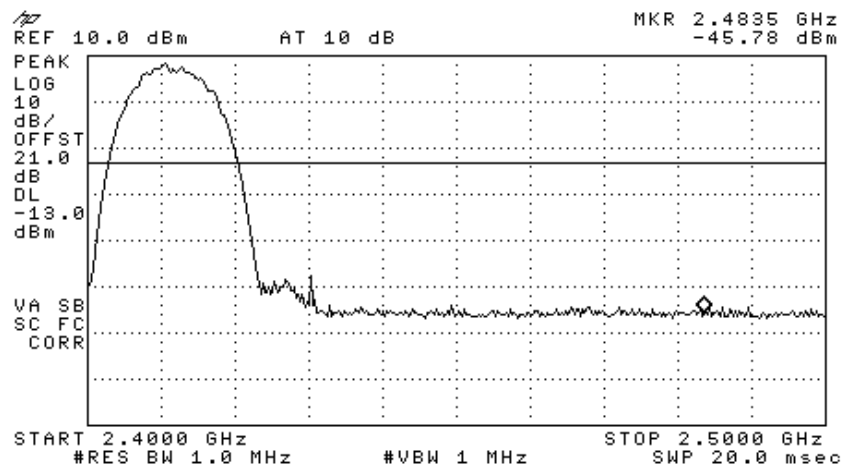


Figure 329 —5765 MHz 64QAM

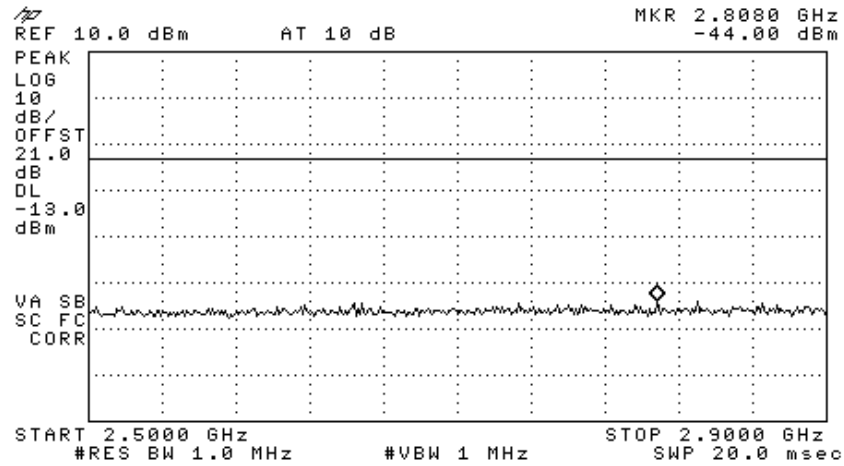


Figure 330 —5765 MHz 64QAM

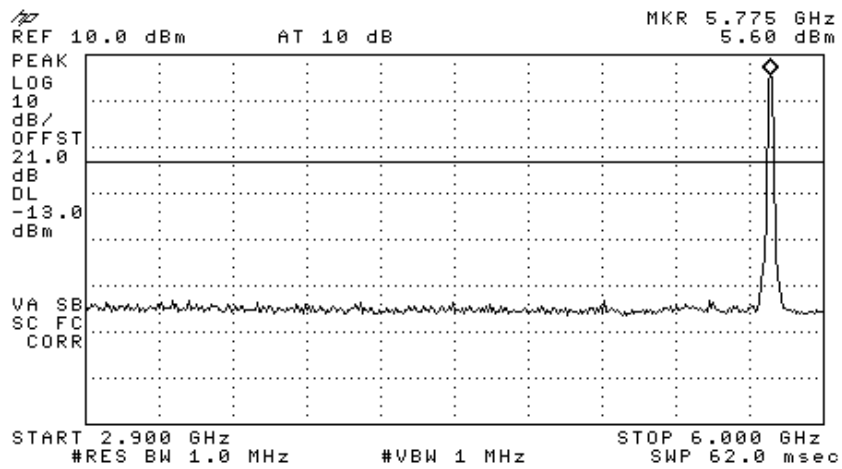


Figure 331 —5765 MHz 64QAM

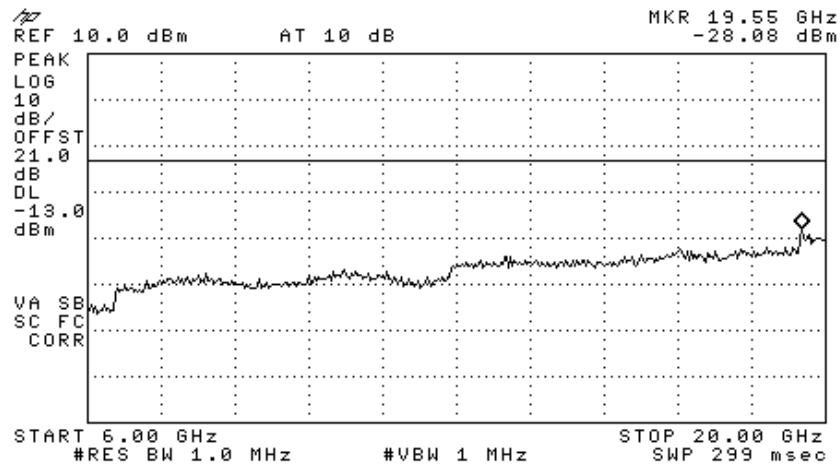


Figure 332 —5765 MHz 64QAM

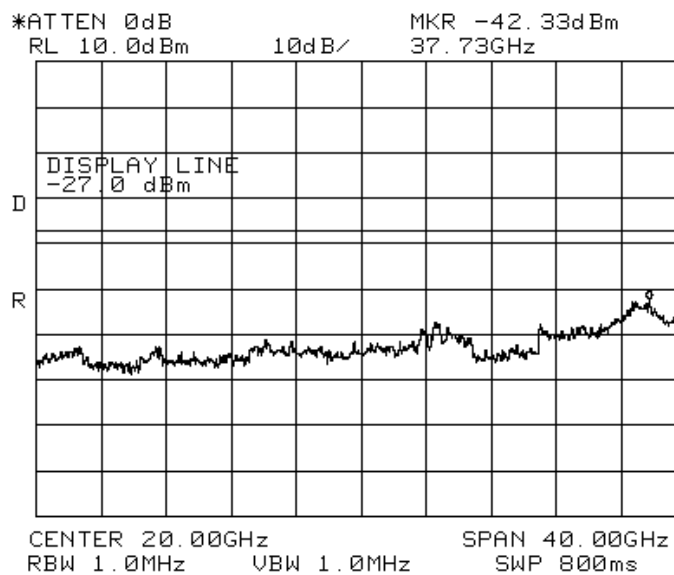


Figure 333 —5765 MHz 64QAM

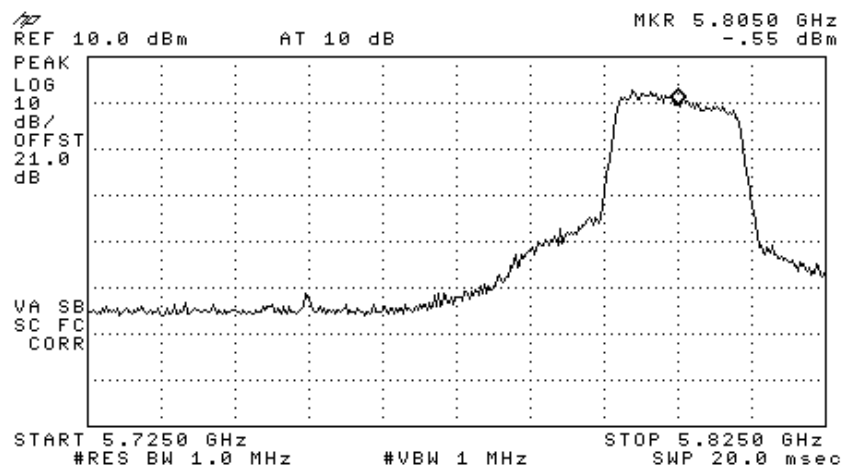


Figure 334 —5805 MHz 64QAM

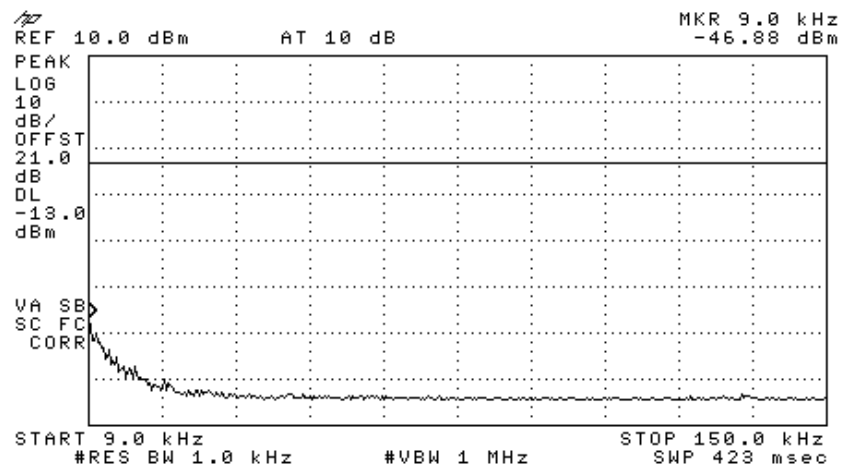


Figure 335 —5805 MHz 64QAM

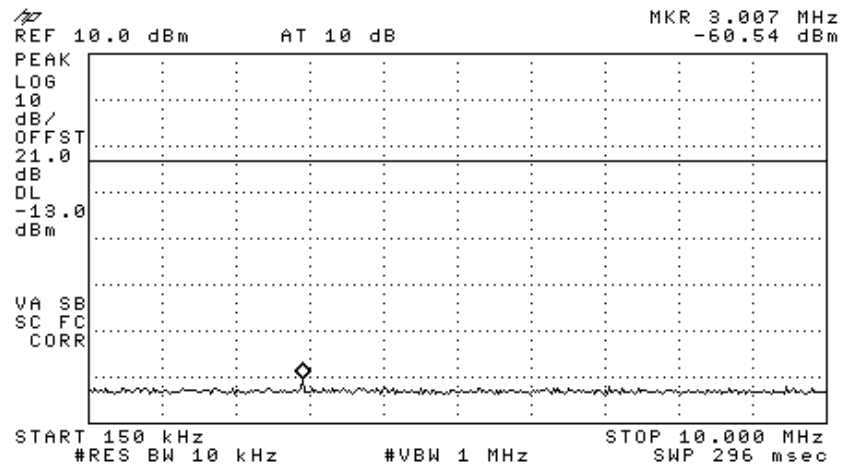


Figure 336 —5805 MHz 64QAM

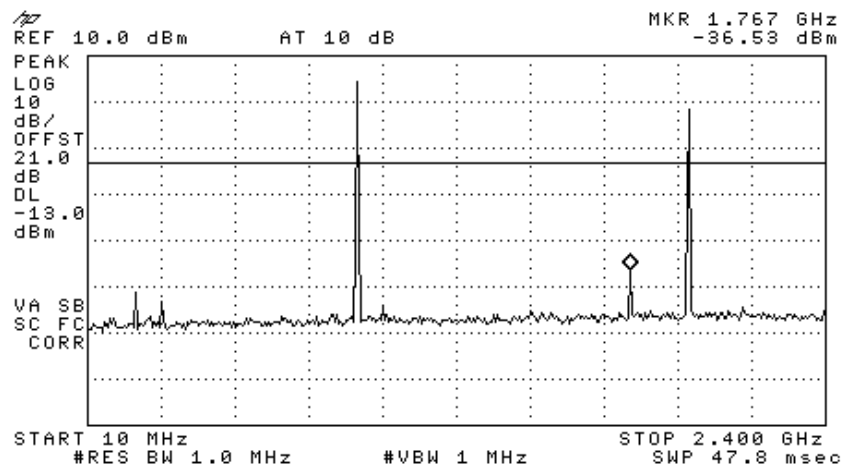


Figure 337 —5805 MHz 64QAM

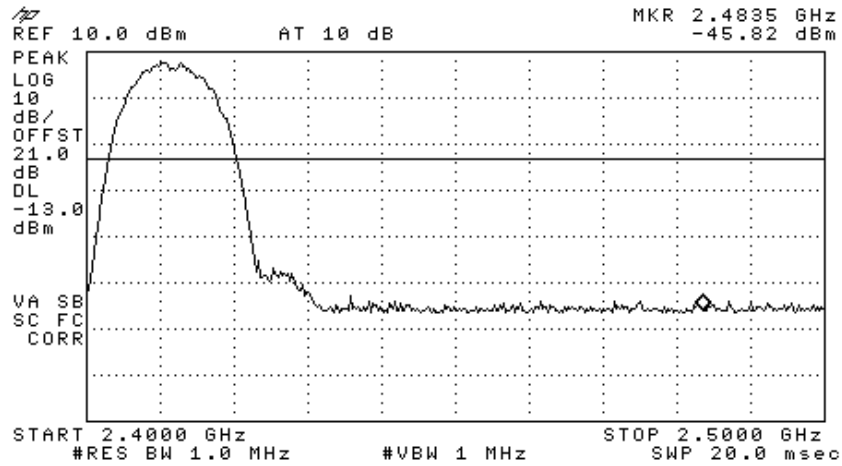


Figure 338 —5805 MHz 64QAM

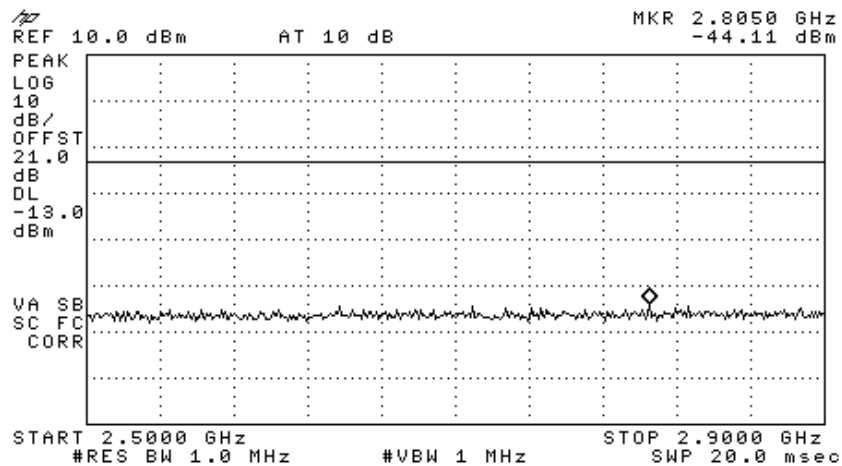


Figure 339 —5805 MHz 64QAM

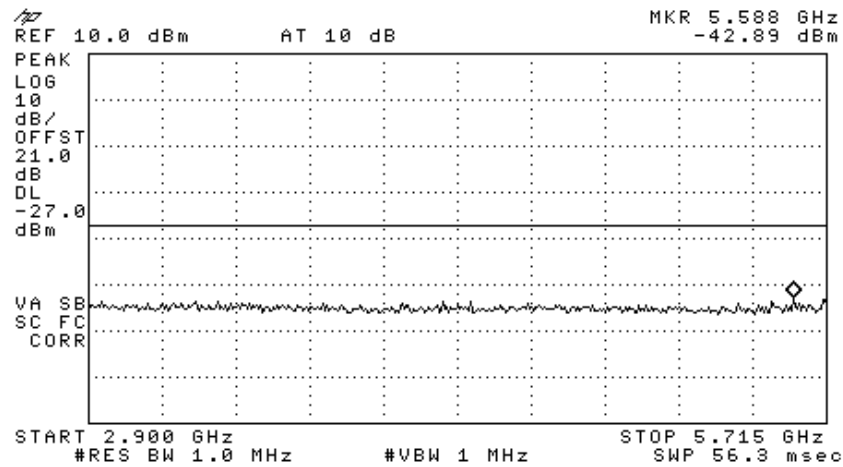


Figure 340 —5805 MHz 64QAM

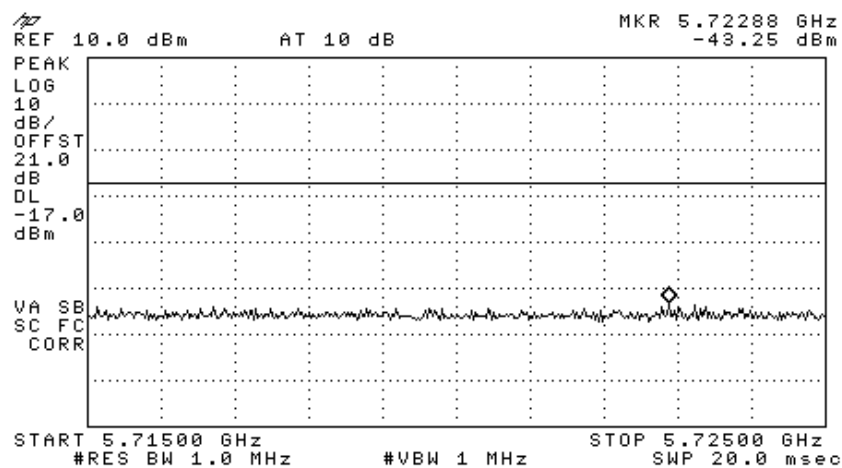


Figure 341 —5805 MHz 64QAM

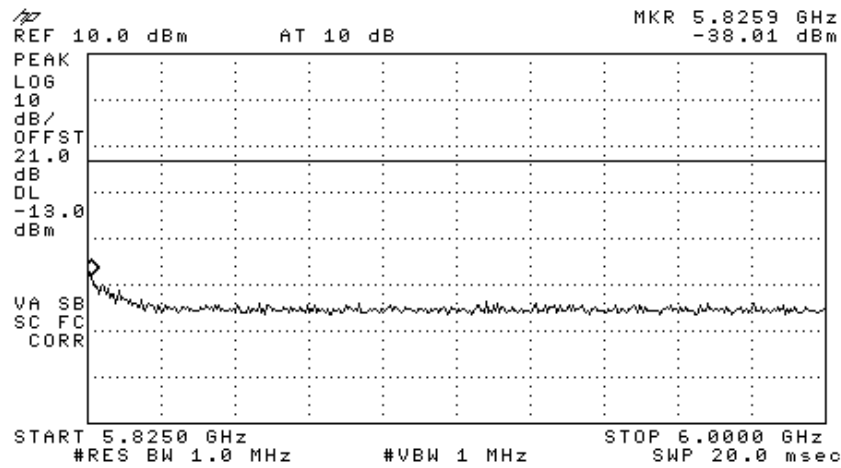


Figure 342 —5805 MHz 64QAM

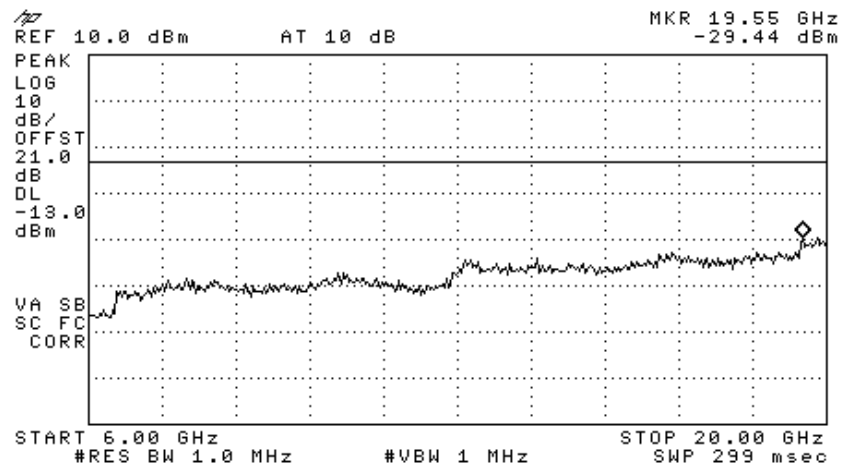


Figure 343 —5805 MHz 64QAM

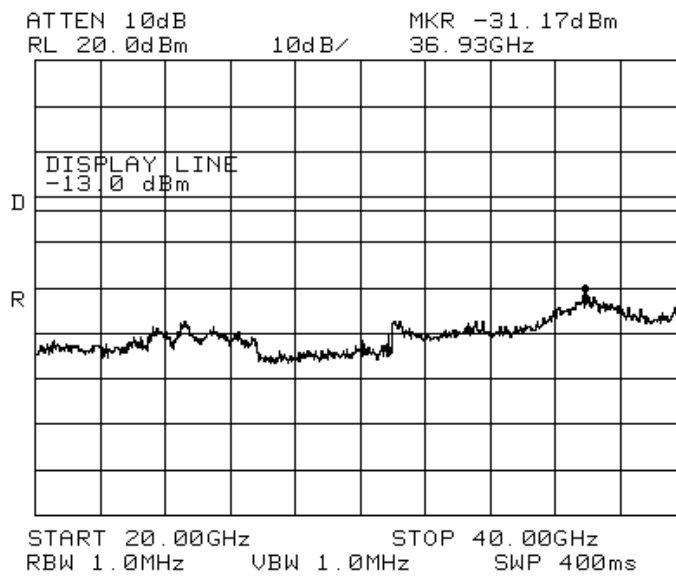


Figure 344 —5805 MHz 64QAM

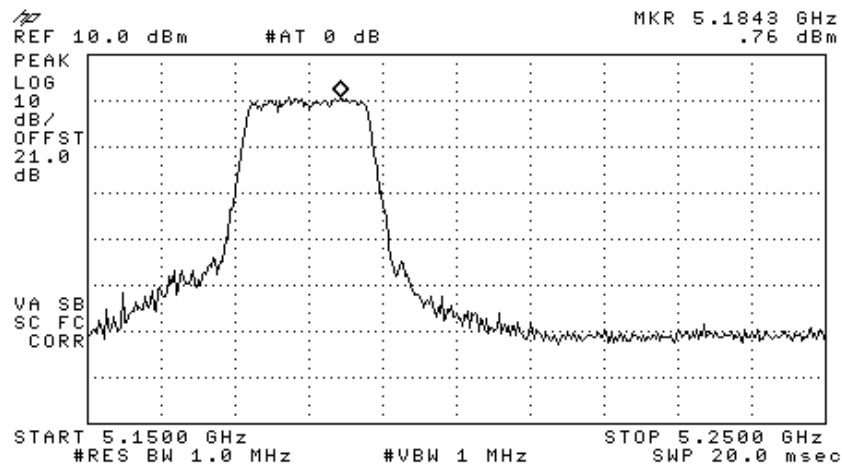


Figure 345 —5180 MHz BPSK

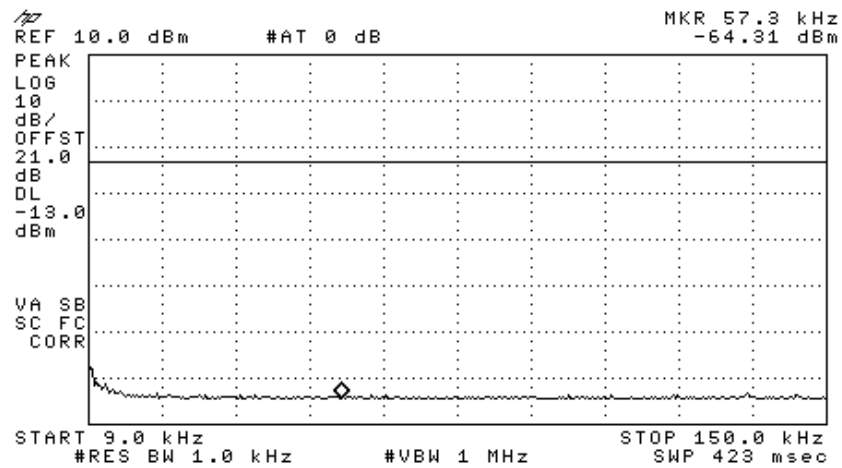


Figure 346 —5180 MHz BPSK

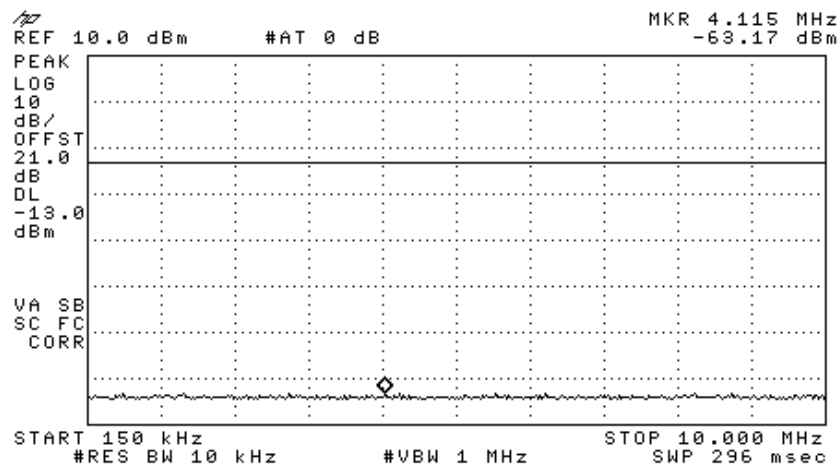


Figure 347 —5180 MHz BPSK

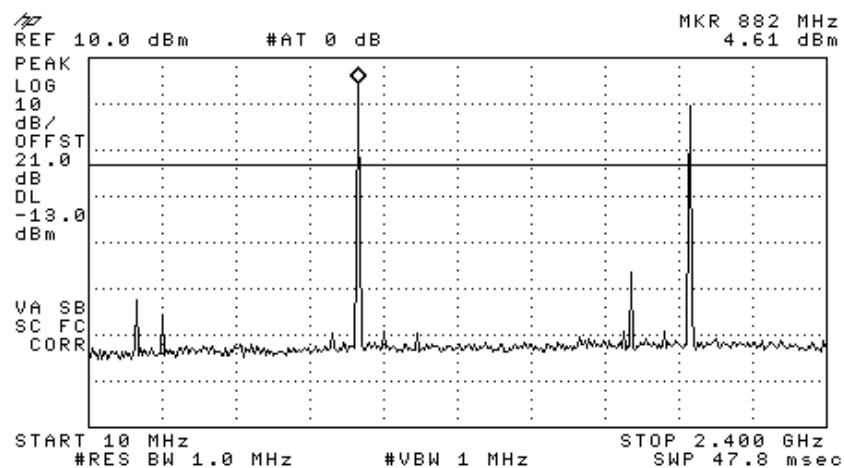


Figure 348 —5180 MHz BPSK

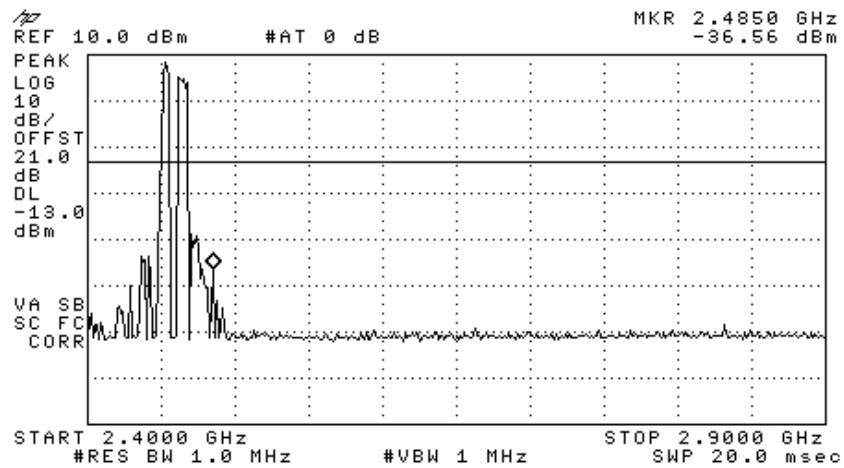


Figure 349 —5180 MHz BPSK

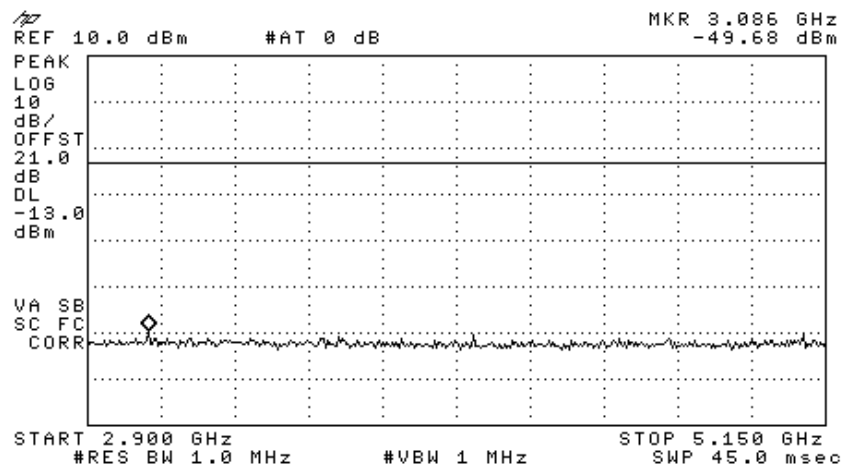


Figure 350 —5180 MHz BPSK

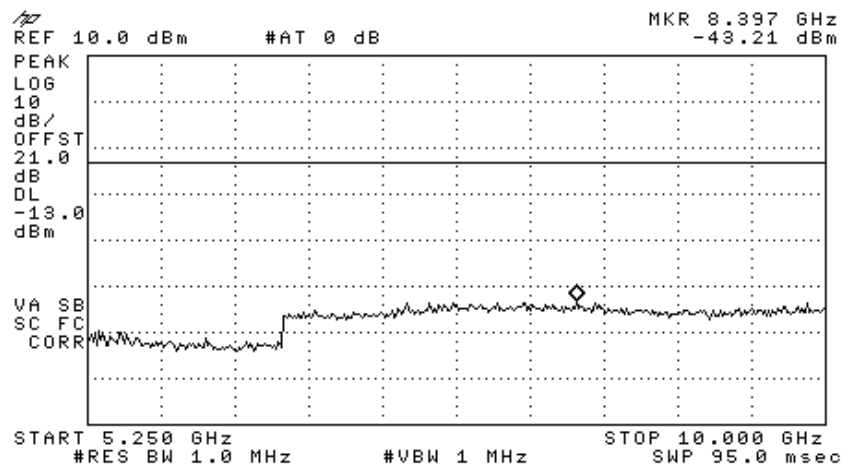


Figure 351 —5180 MHz BPSK

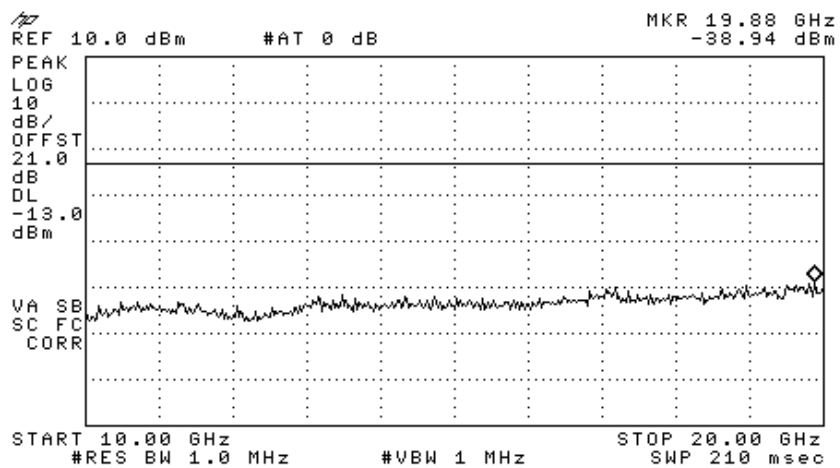


Figure 352 —5180 MHz BPSK

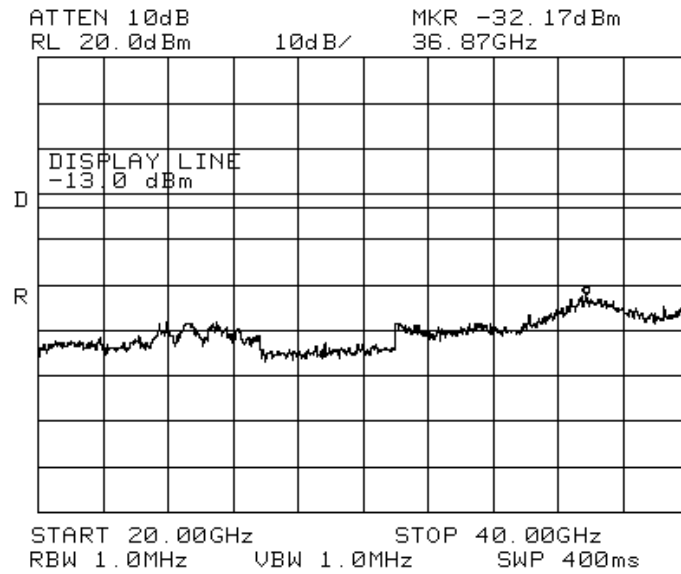


Figure 353 —5180 MHz BPSK

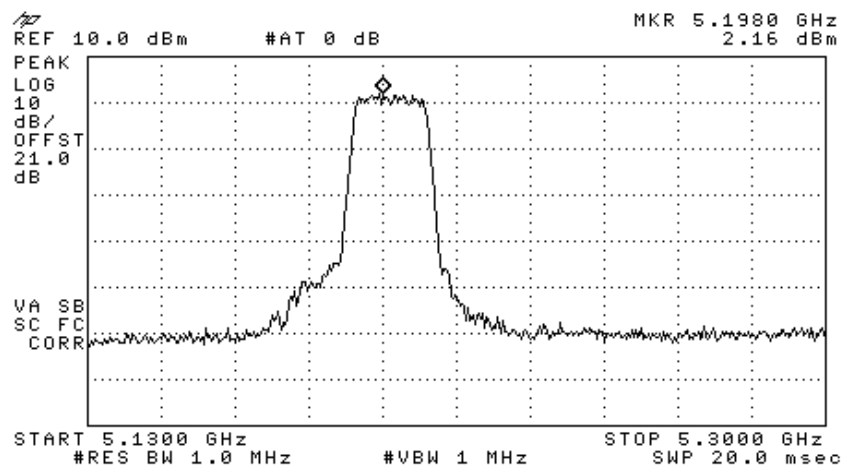


Figure 354 —5200 MHz BPSK

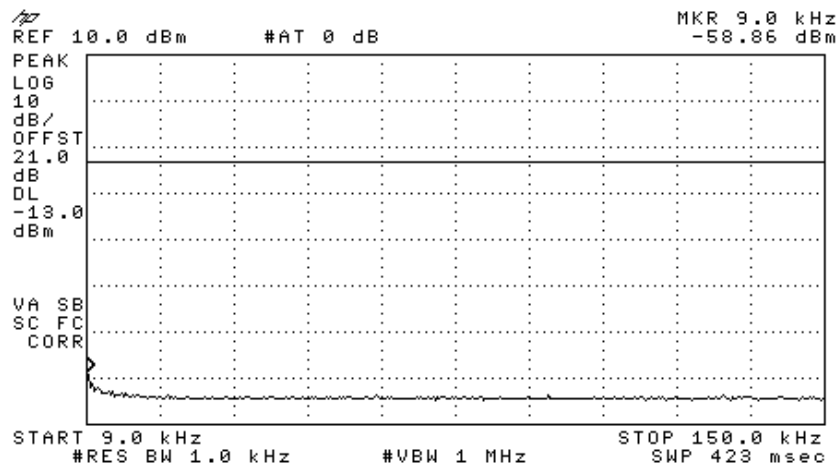


Figure 355 —5200 MHz BPSK

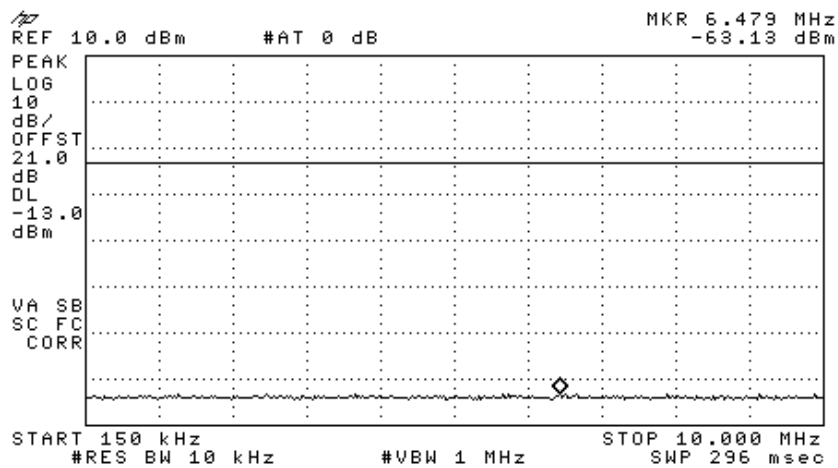


Figure 356 —5200 MHz BPSK

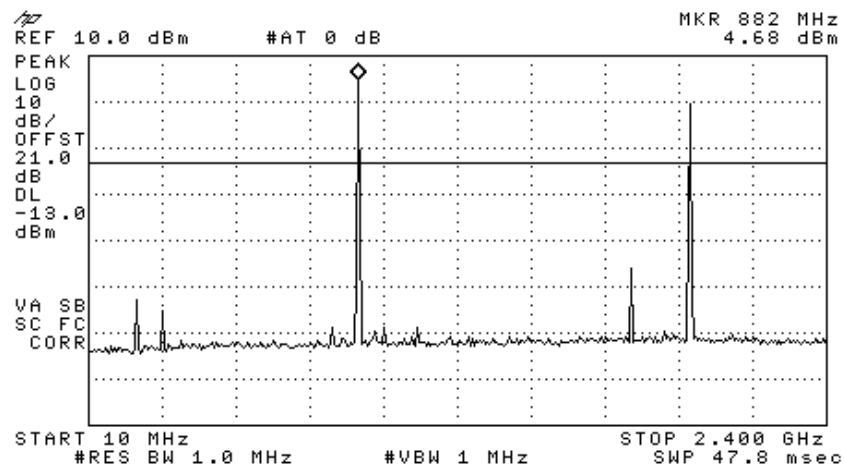


Figure 357 —5200 MHz BPSK

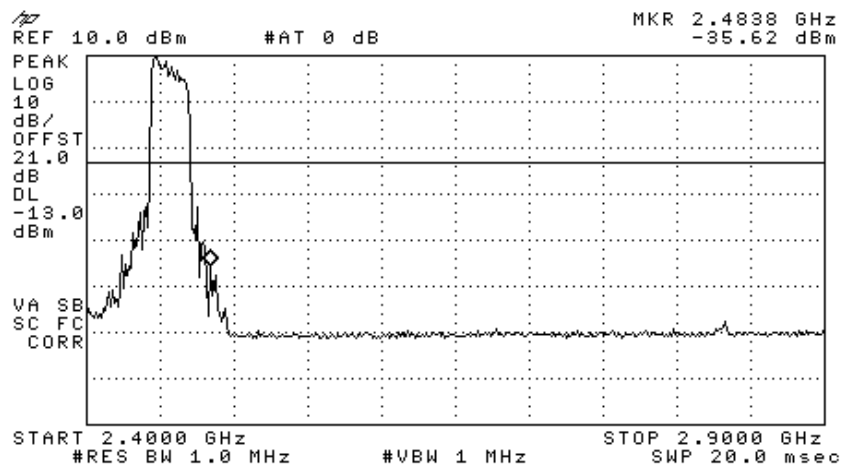


Figure 358 —5200 MHz BPSK

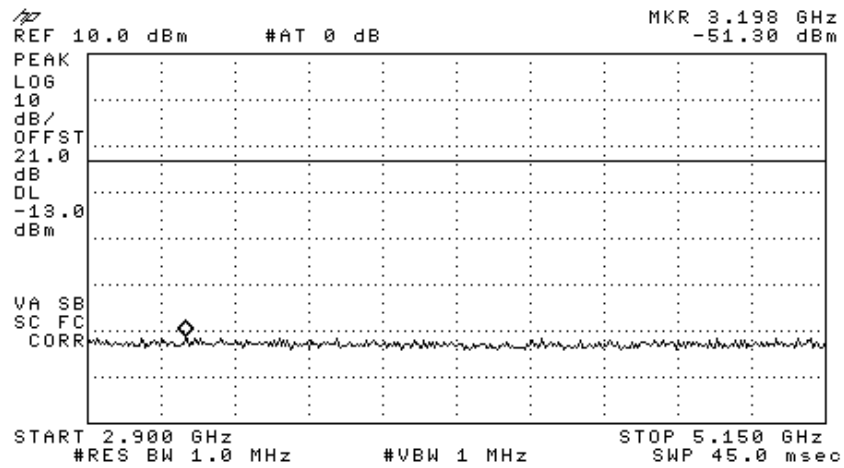


Figure 359 —5200 MHz BPSK

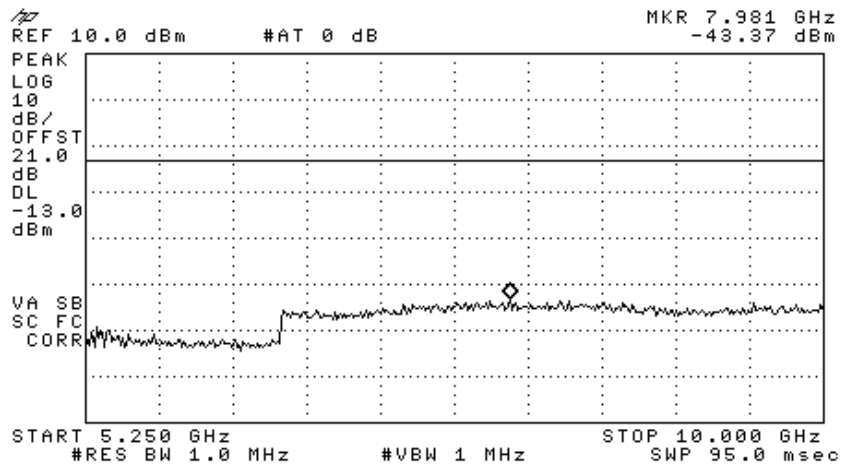


Figure 360 —5200 MHz BPSK

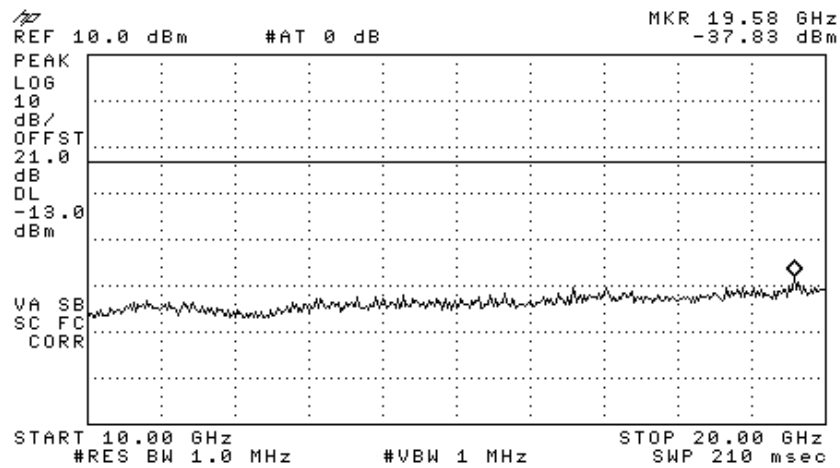


Figure 361 —5200 MHz BPSK

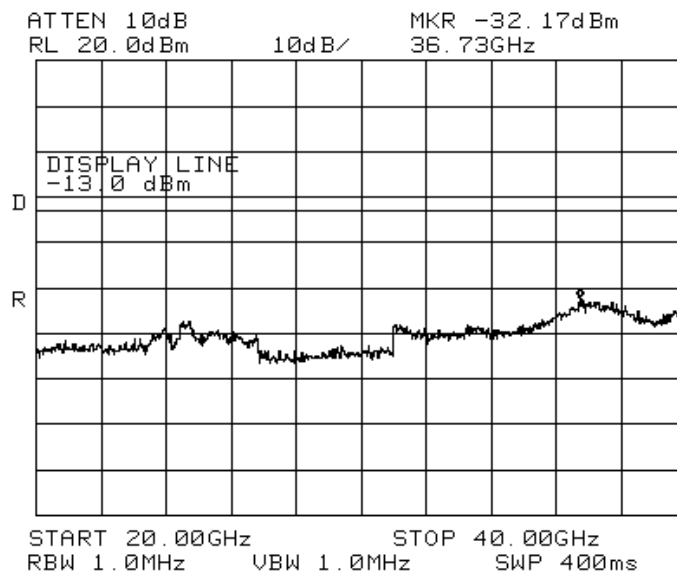


Figure 362 —5200 MHz BPSK

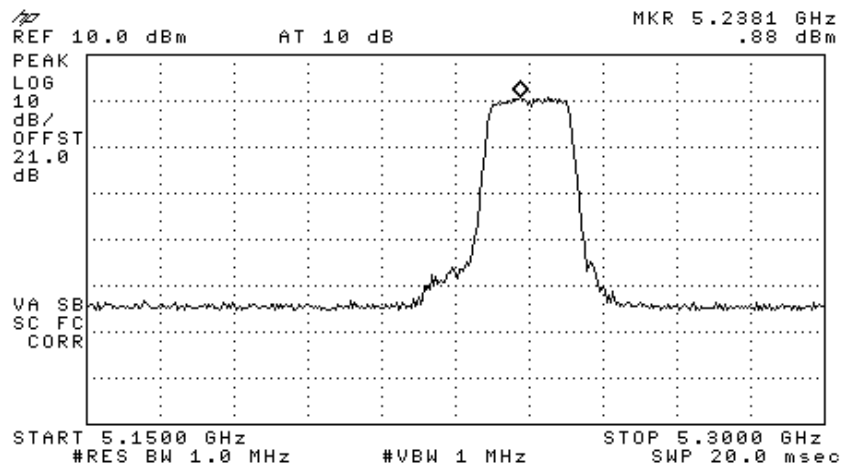


Figure 363 —5240 MHz BPSK

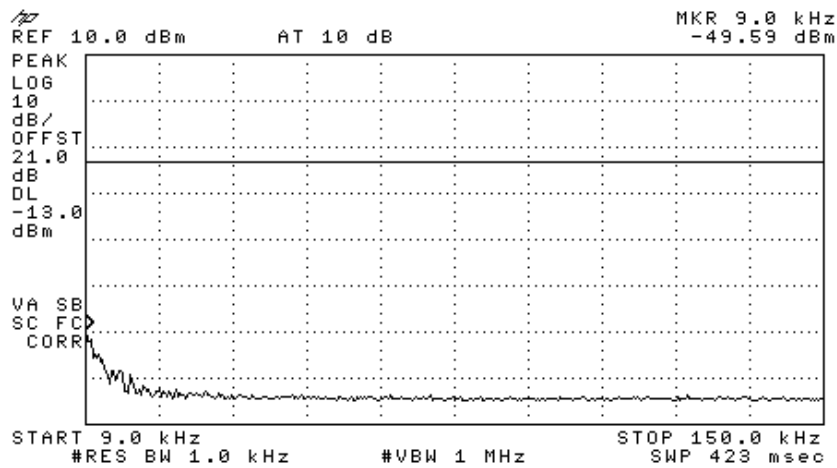


Figure 364 —5240 MHz BPSK

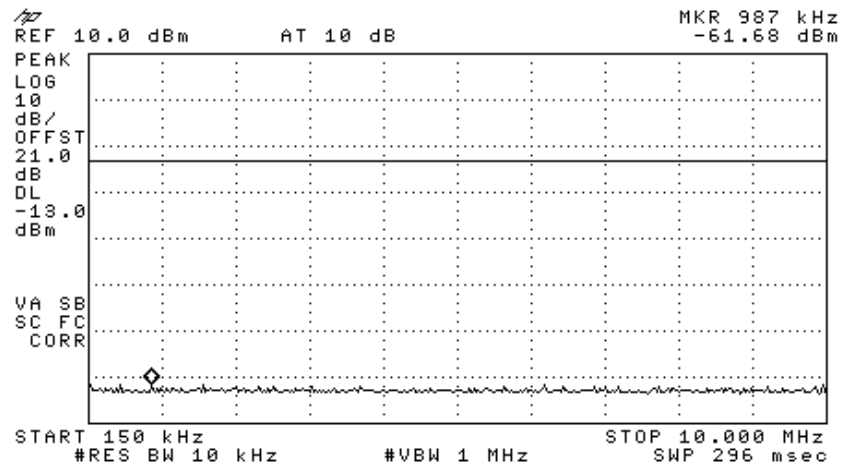


Figure 365 —5240 MHz BPSK

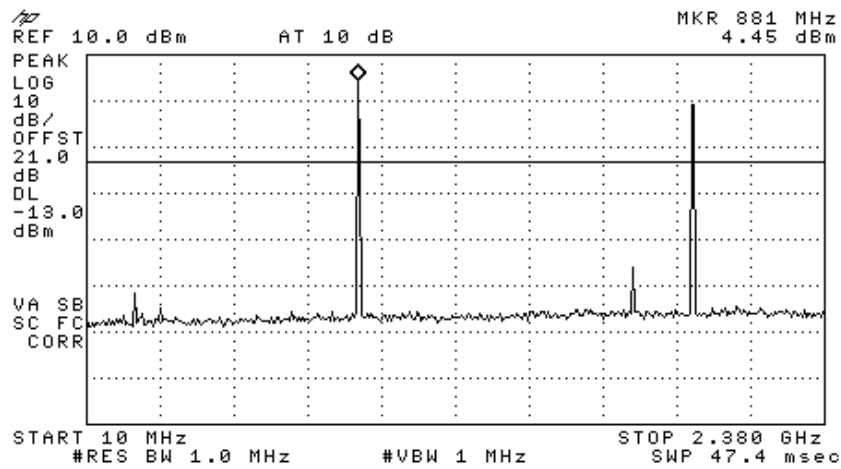


Figure 366 —5240 MHz BPSK

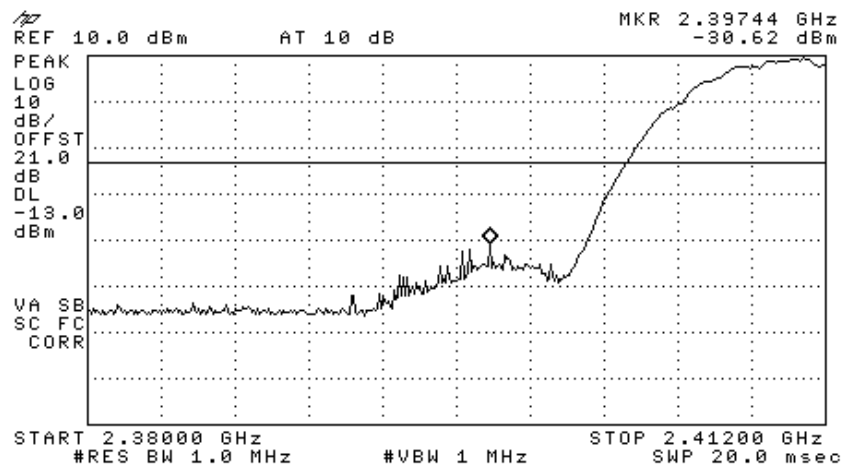


Figure 367 —5240 MHz BPSK

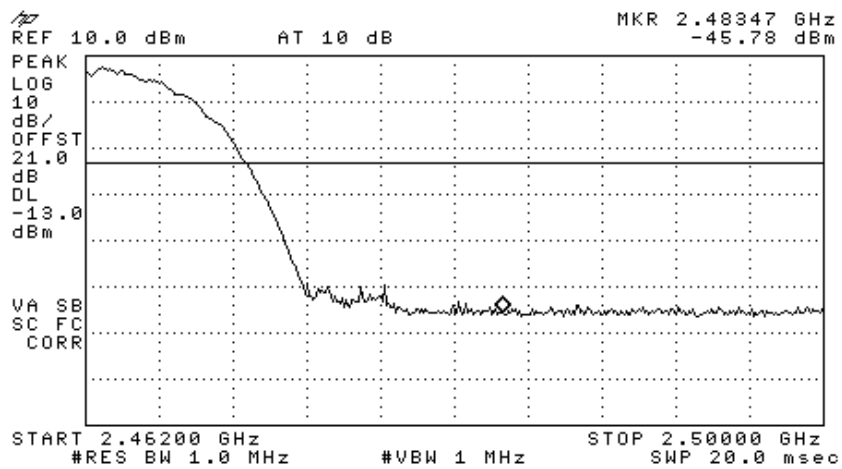


Figure 368 —5240 MHz BPSK

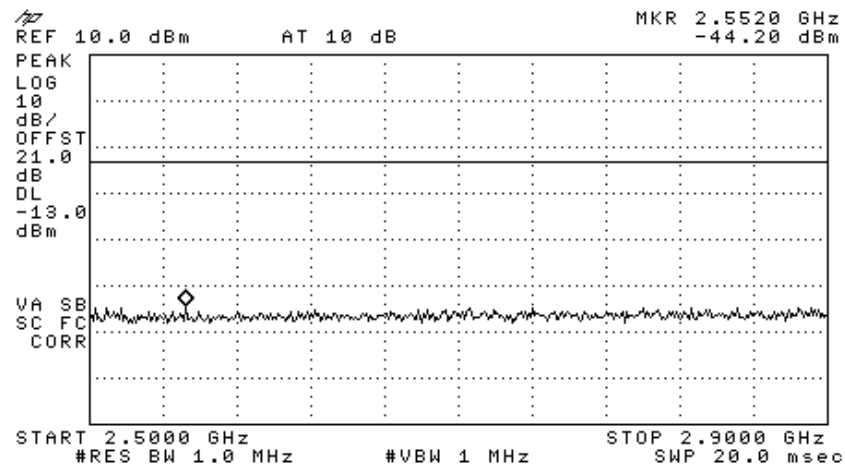


Figure 369 —5240 MHz BPSK

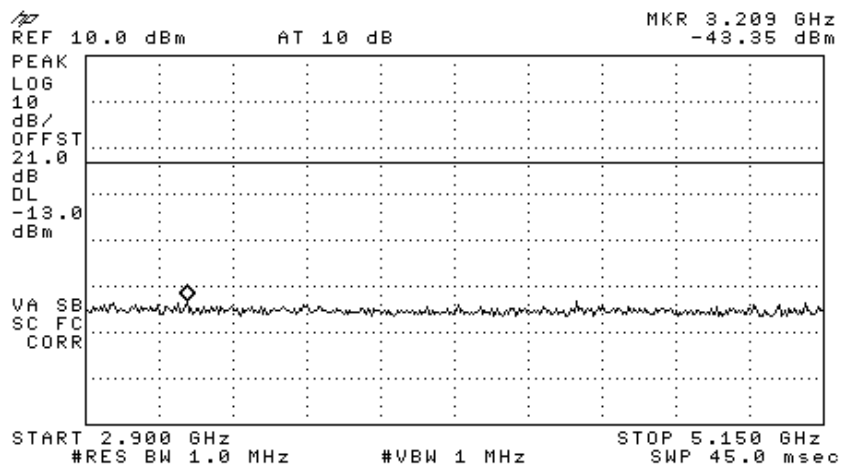


Figure 370 —5240 MHz BPSK

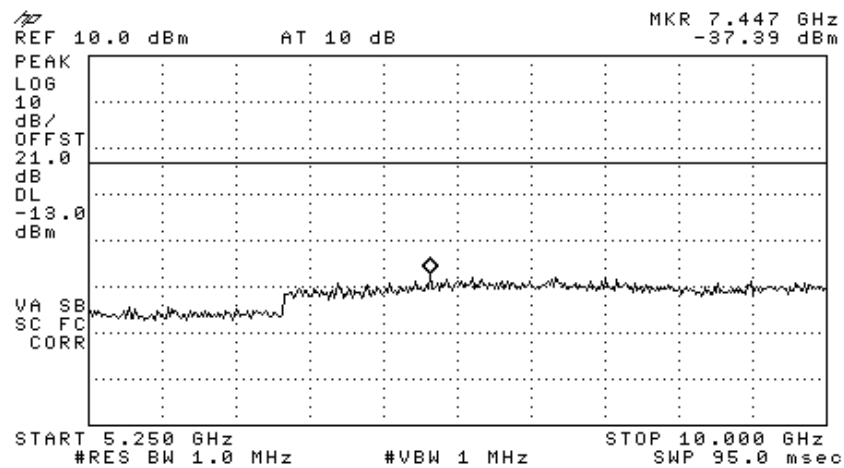


Figure 371 —5240 MHz BPSK

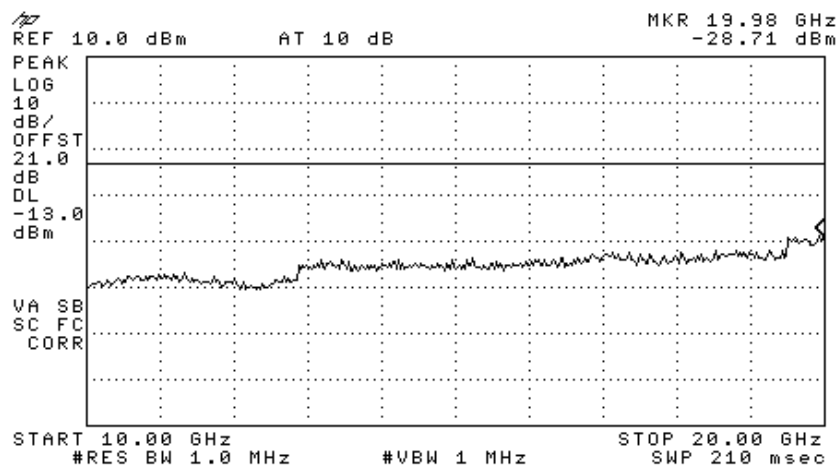


Figure 372 —5240 MHz BPSK

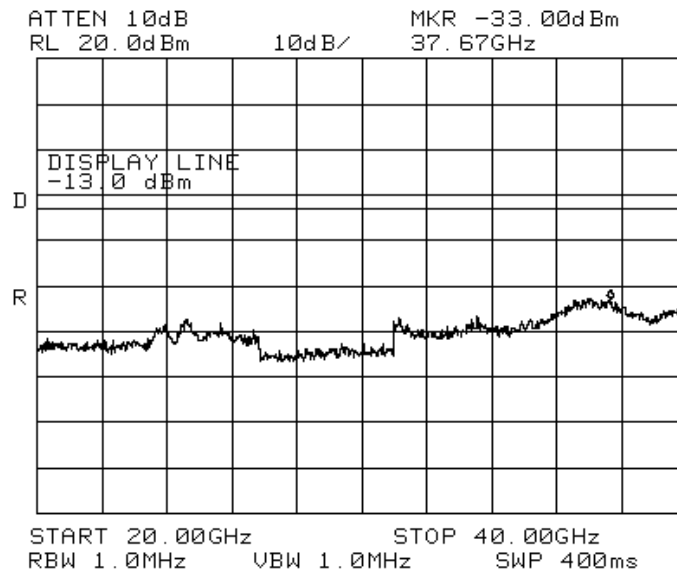


Figure 373 —5240 MHz BPSK

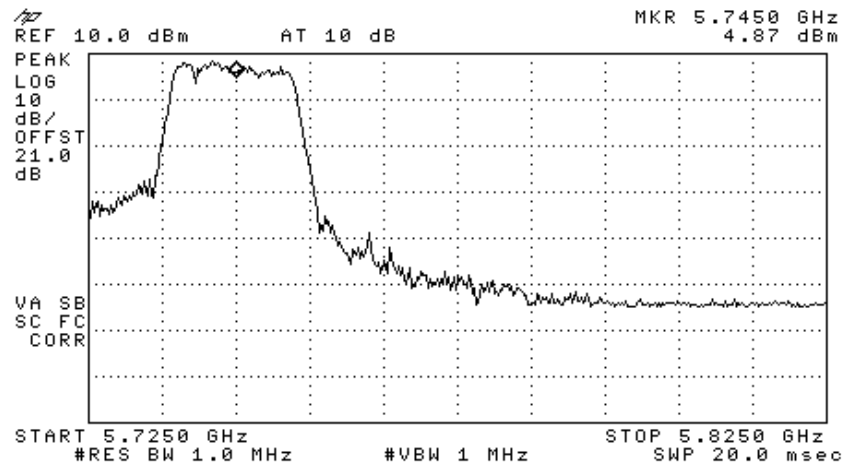


Figure 374 —5745 MHz BPSK

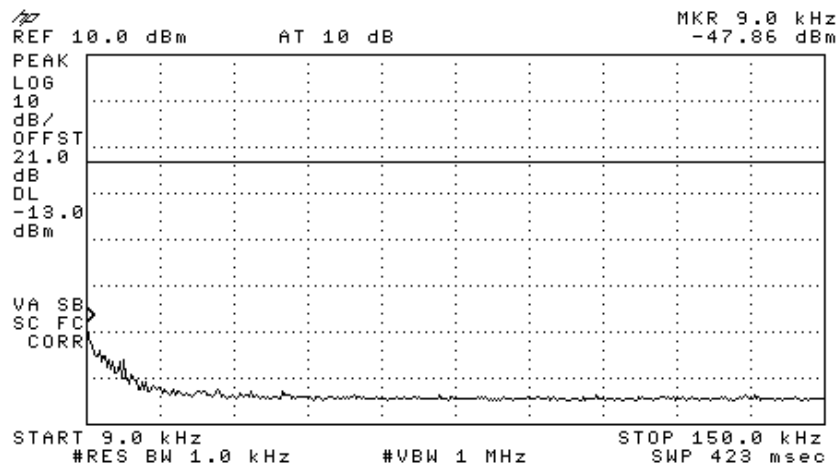


Figure 375 —5745 MHz BPSK

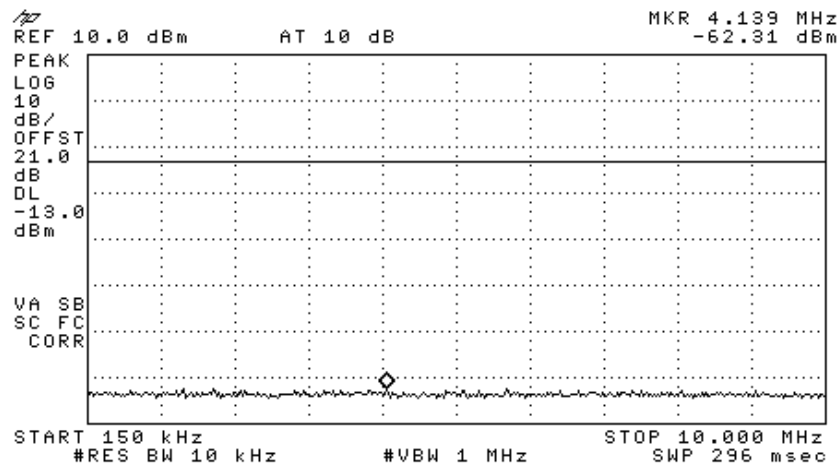


Figure 376 —5745 MHz BPSK

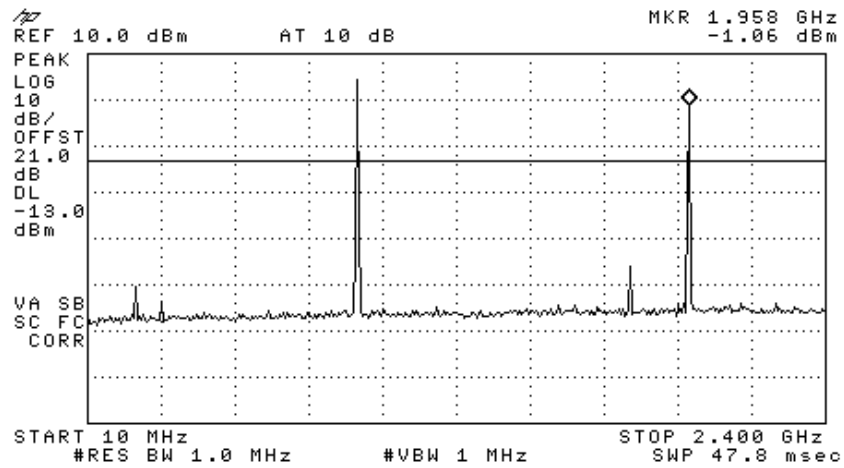


Figure 377 —5745 MHz BPSK

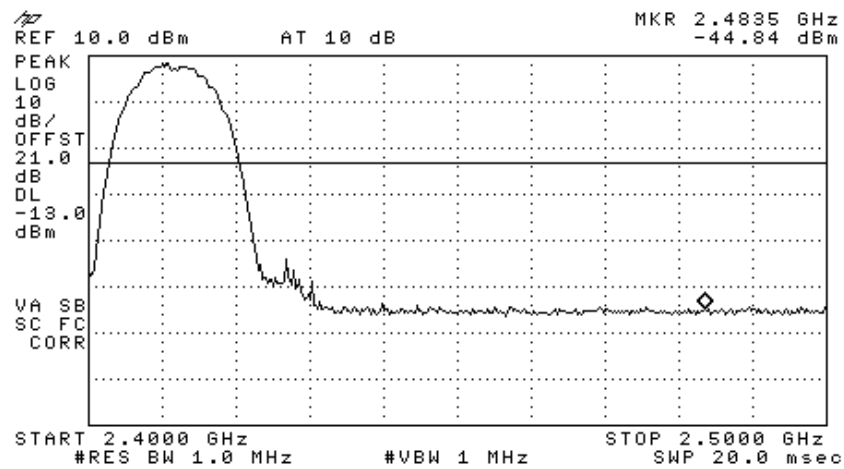


Figure 378 —5745 MHz BPSK

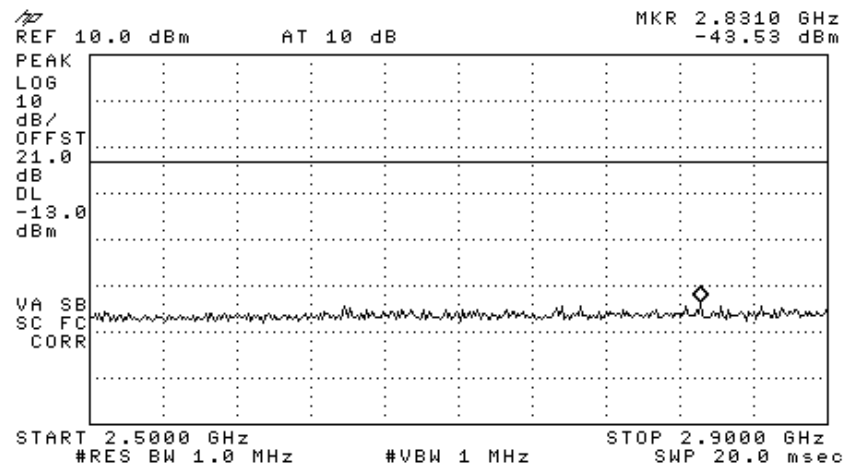


Figure 379 —5745 MHz BPSK

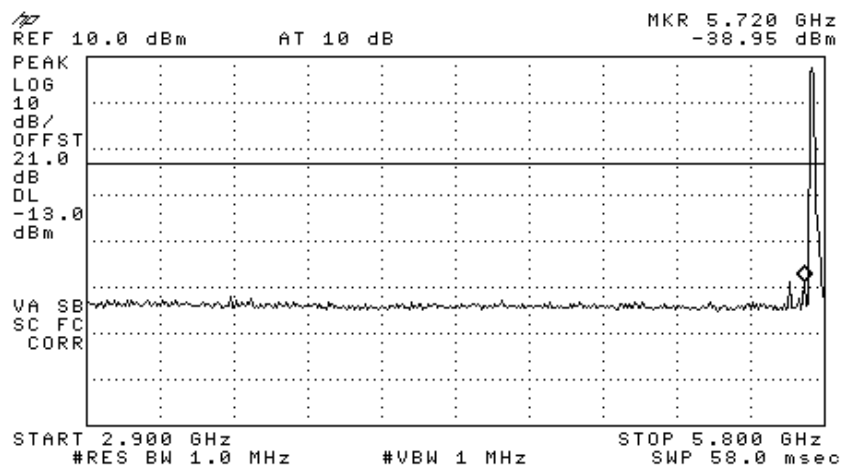


Figure 380 —5745 MHz BPSK

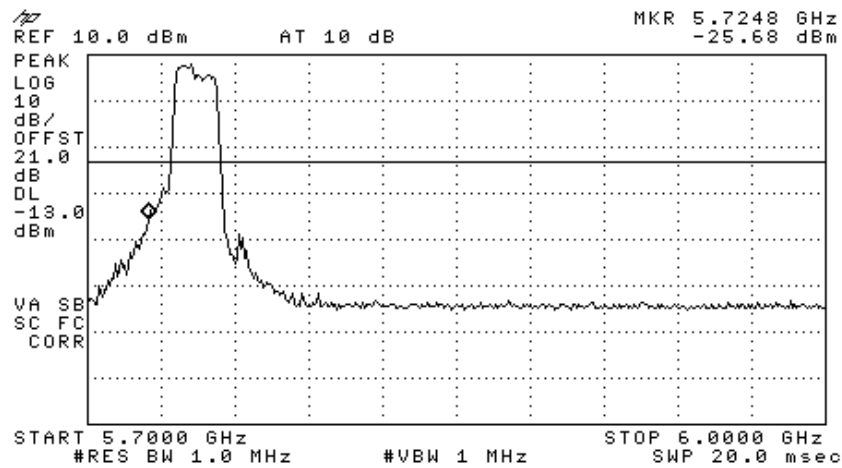


Figure 381 —5745 MHz BPSK

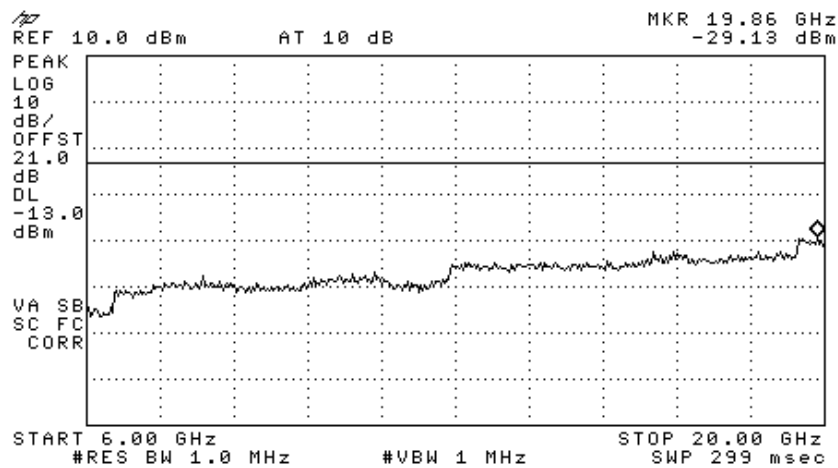


Figure 382 —5745 MHz BPSK

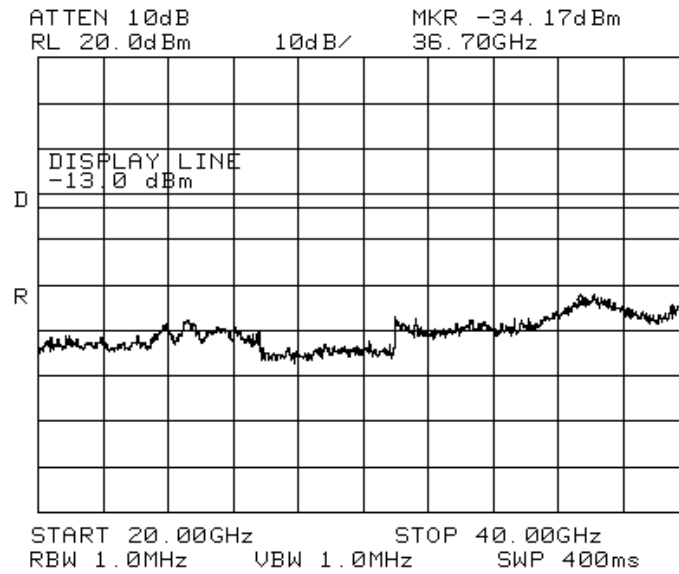


Figure 383 —5745 MHz BPSK

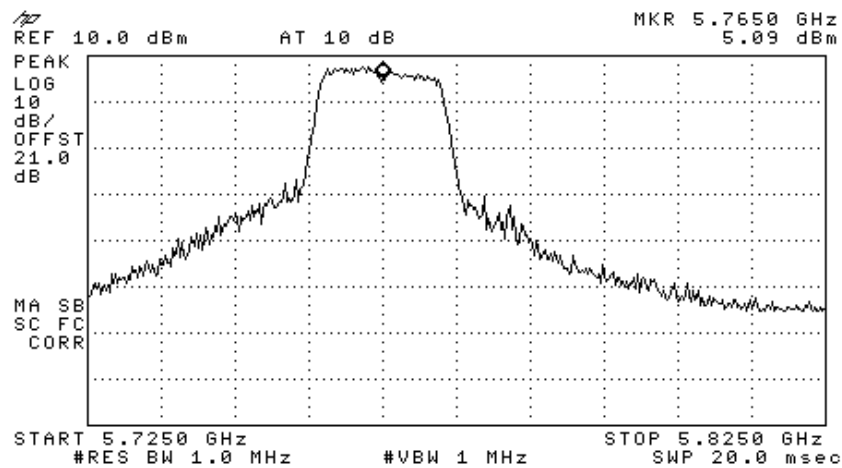


Figure 384 —5765 MHz BPSK

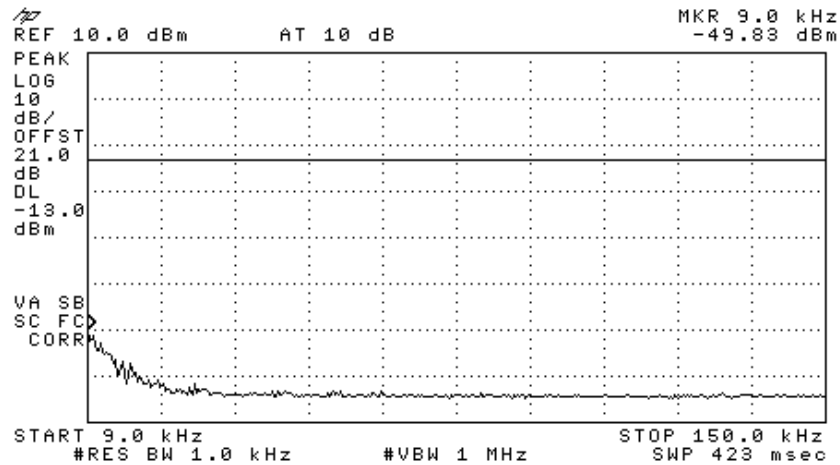


Figure 385 —5765 MHz BPSK

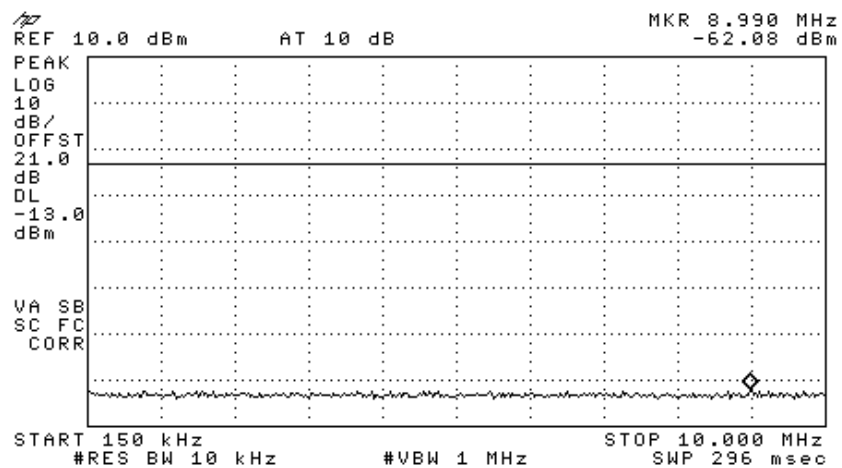


Figure 386 —5765 MHz BPSK

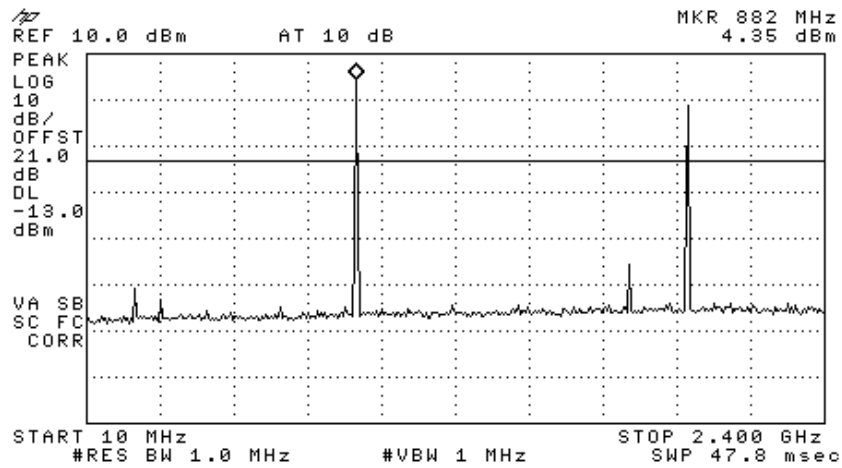


Figure 387 —5765 MHz BPSK

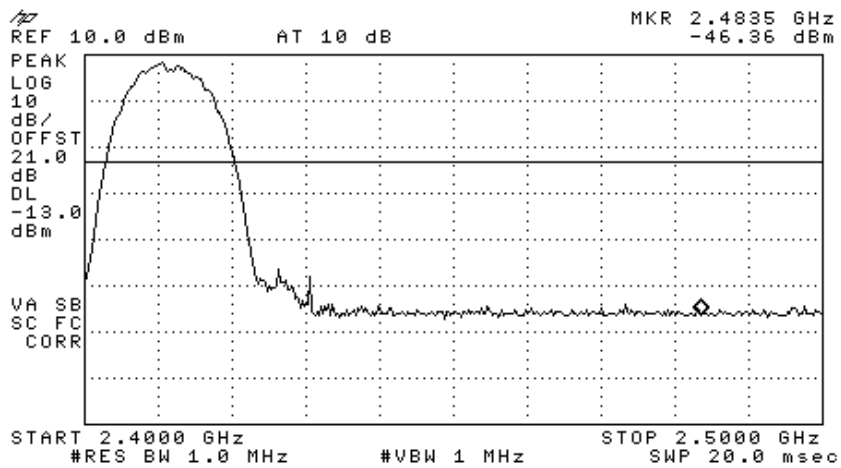


Figure 388 —5765 MHz BPSK

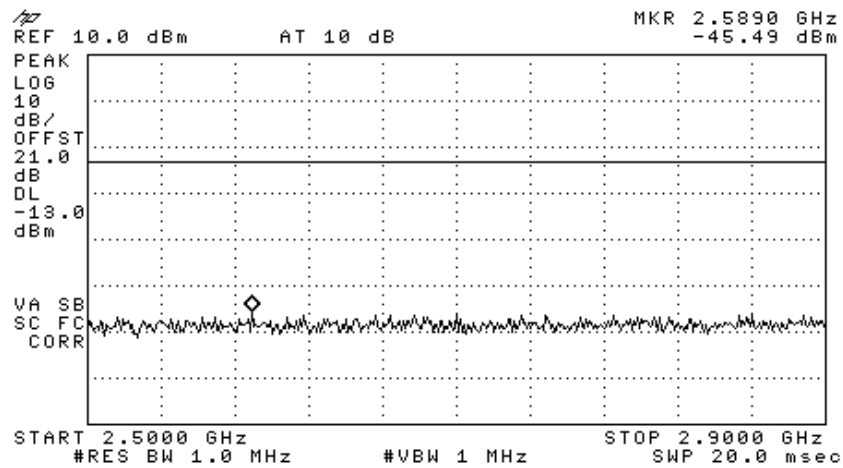


Figure 389 —5765 MHz BPSK

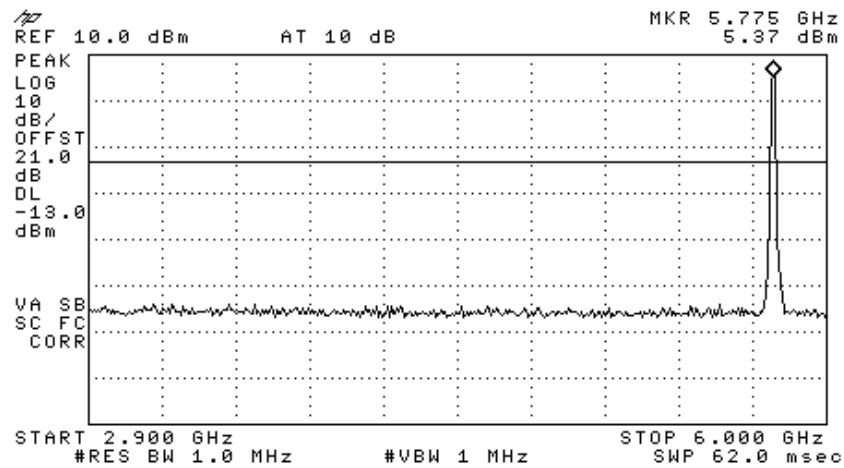


Figure 390 —5765 MHz BPSK

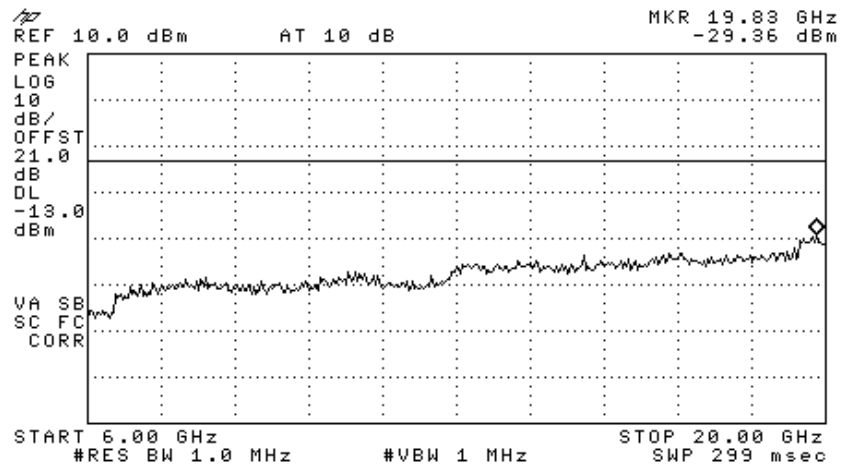


Figure 391 —5765 MHz BPSK

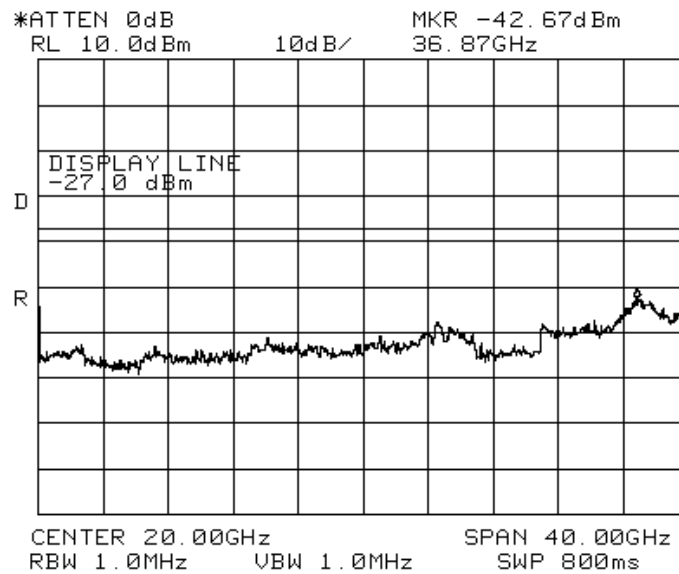


Figure 392 —5765 MHz BPSK

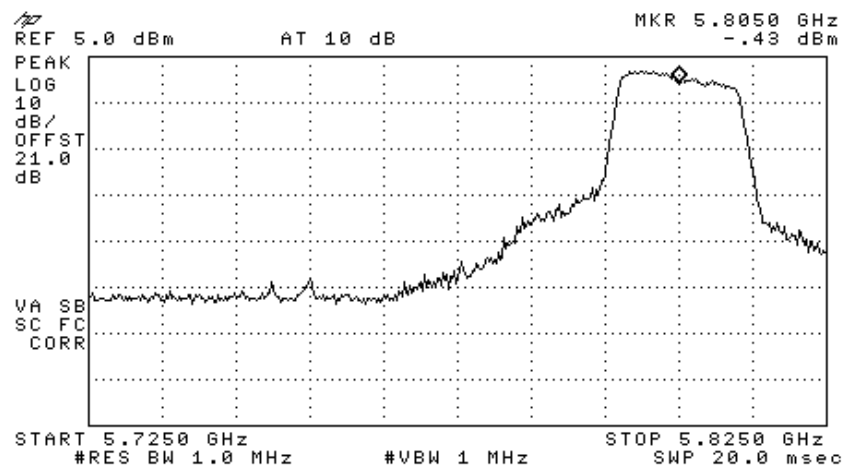


Figure 393 —5805 MHz BPSK

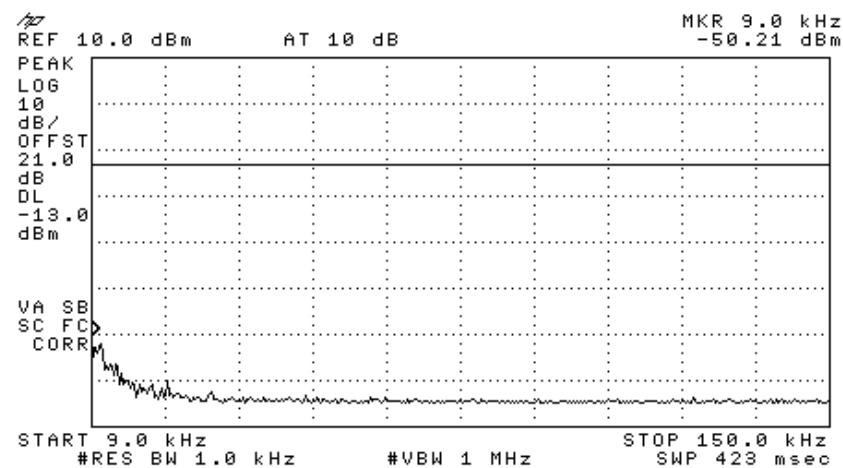


Figure 394 —5805 MHz BPSK

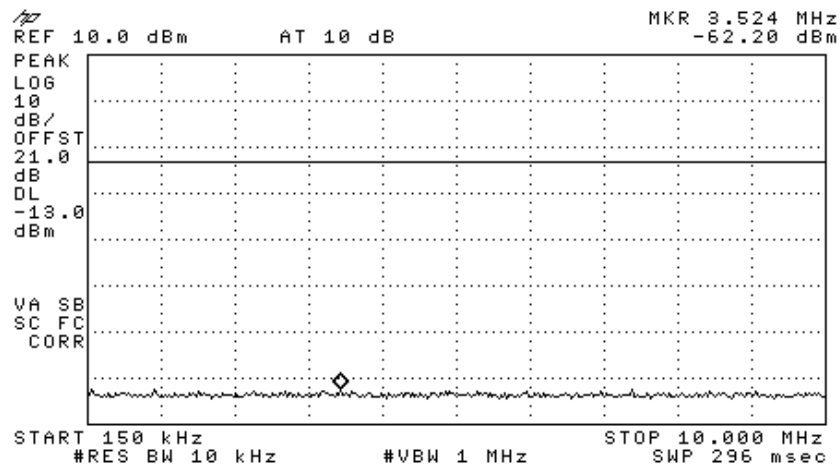


Figure 395 —5805 MHz BPSK

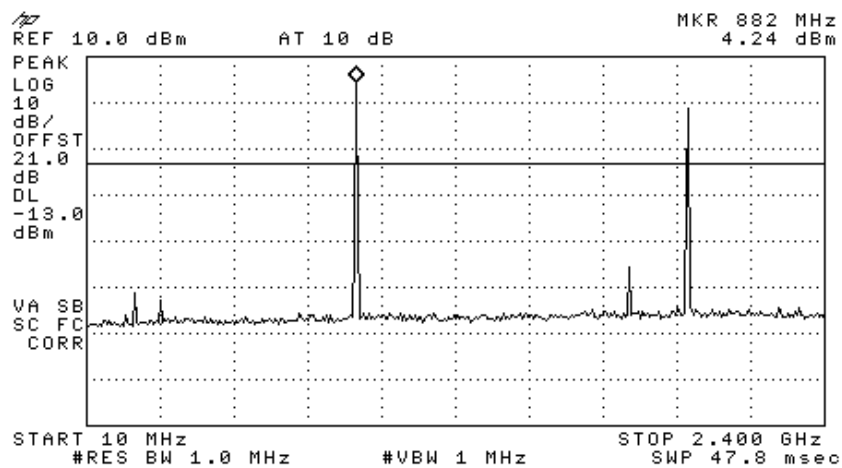


Figure 396 —5805 MHz BPSK

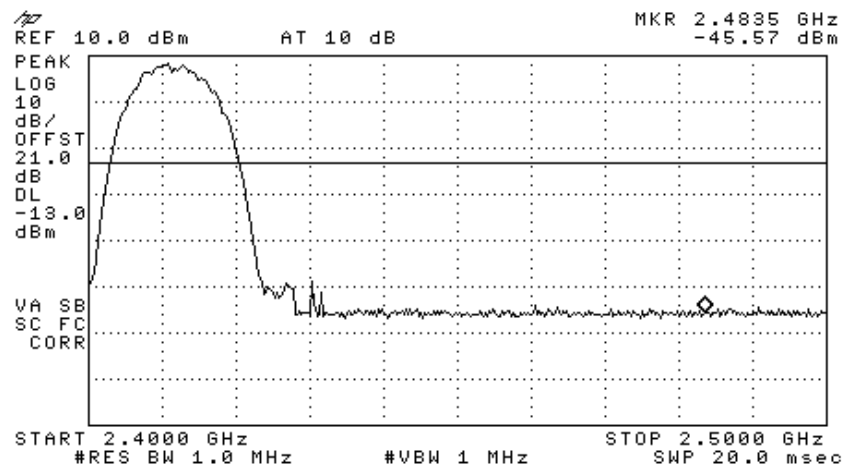


Figure 397 —5805 MHz BPSK

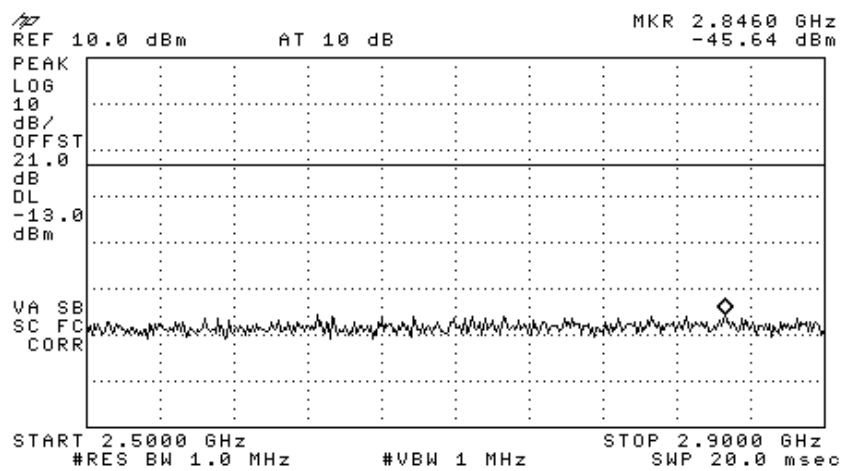


Figure 398 —5805 MHz BPSK

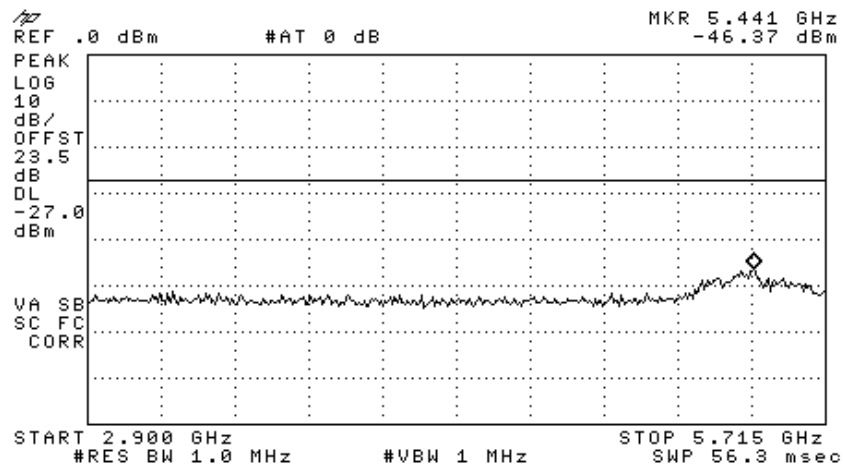


Figure 399 —5805 MHz BPSK

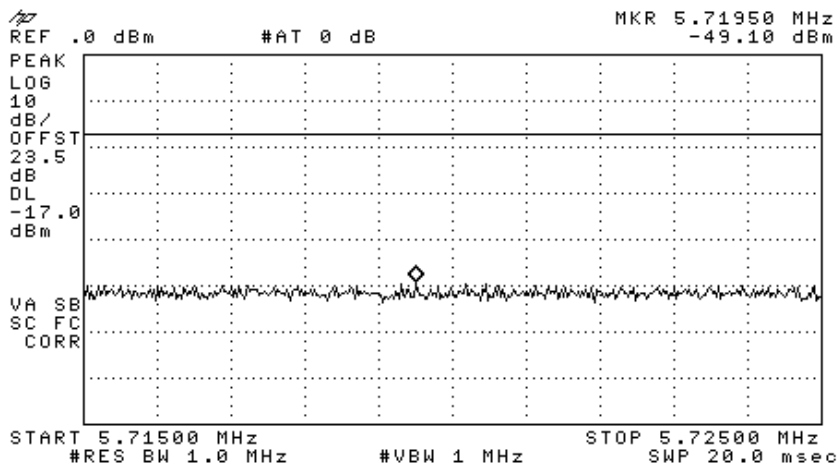


Figure 400 —5805 MHz BPSK

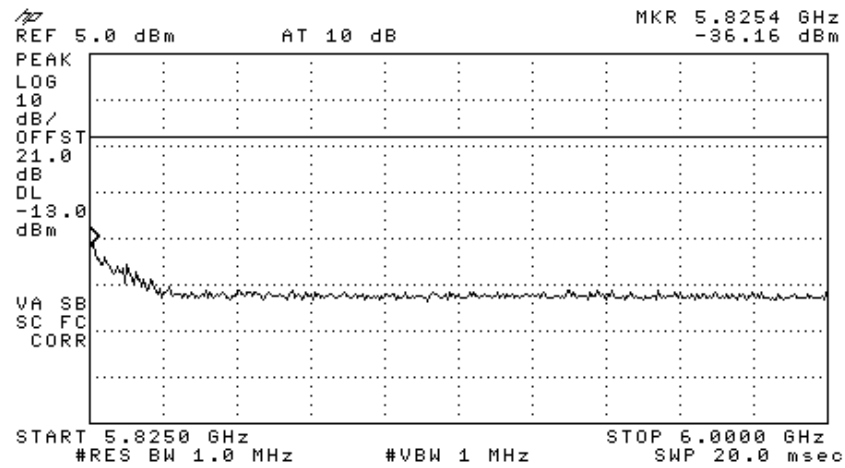


Figure 401 —5805 MHz BPSK

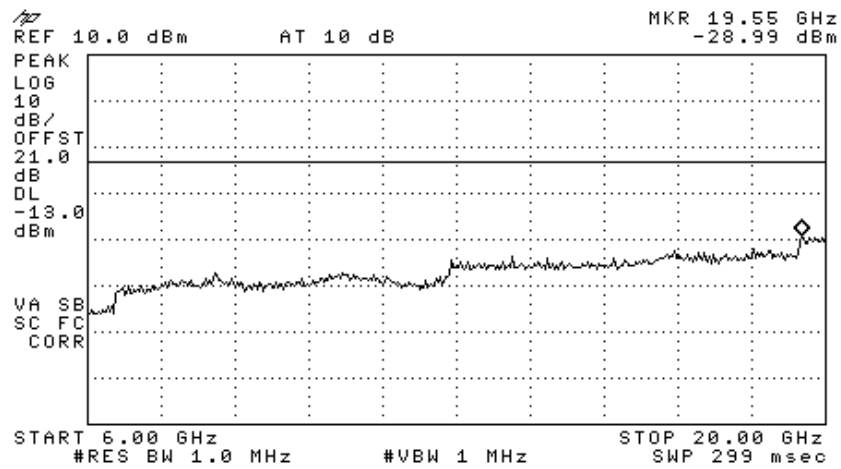


Figure 402 —5805 MHz BPSK

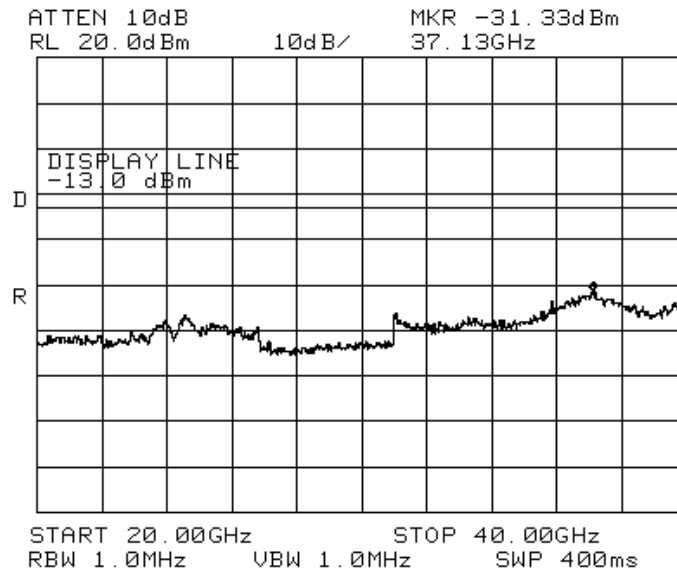


Figure 403 —5805 MHz BPSK

21.2 Results table

E.U.T Description: WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Cisco 1242 Access Points

Model No.: 860M With WCE

Serial Number: 1. 860M: 73903D 2. WCE: 739038

Specification: F.C.C. Part 15, Subpart E

Operation Frequency (MHz)	Modulation	Reading (dBm)	Specification (dBm)	Margin (dB)
5180	64QAM	-31.04	27.0	-4.04
	BPSK	-36.56	27.0	-9.56
5200	64QAM	-29.73	27.0	-2.73
	BPSK	-35.62	27.0	-8.62
5240	64QAM	-29.15	27.0	-2.15
	BPSK	-28.71	27.0	-1.71
5745	64QAM	-29.80	-17.0	-2.80
	BPSK	-25.68	-17.0	-8.68
5765	64QAM	-28.08	-27.0	-1.00
	BPSK	-29.36	-27.0	-2.36
5805	64QAM	-29.44	-27.0	-2.44
	BPSK	-28.99	-27.0	-1.99

Figure 404 Peak Power Output of 5150-5250; 5725-5825 MHz Bands

JUDGEMENT: Passed by 1.00 dB

TEST PERSONNEL:

Tester Signature: 

Date: 05.02.08

Typed/Printed Name: E. Pitt

21.3 Test Equipment Used.

Peak Power Output of 5150-5825 MHz Band

Instrument	Manufacturer	Model	Serial/Part Number	Calibration	
				Last Calibr.	Period
Spectrum Analyzer	HP	8592L	3826A01204	February 22, 2007	1 year
Spectrum Analyzer	HP	8564E	3442A00275	November 14, 2007	1 year
Attenuator	Jyebao	-	FAT-AM5AF5G6G2W20	May 9, 2007	1 year
Cable	Rhophase	KPS-5000-KPS	A1674	February 8, 2007	1 year

Figure 405 Test Equipment Used

22. Band Edge Spectrum 5GHz Transmitter 802.11b/g+802.11a + CELL + PCS Signals

[In Accordance with section 15.407)

22.1 Test procedure

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator (20 dB) and an appropriate coaxial cable (cable loss = 1 dB). The spectrum analyzer was set to 1 MHz resolution BW. Maximum power level below 5150 MHz and above 5350 MHz was measured at 5180 MHz and 5240MHz correspondingly. Maximum power level below 5725 MHz and above 5825 MHz was measured at 5745 MHz and 5805 MHz correspondingly.

The E.U.T. was tested at 5180, 5240, 5745, and 5805 MHz with the following modulations: 64QAM (54Mbit/sec) and BPSK (6Mbit/sec).

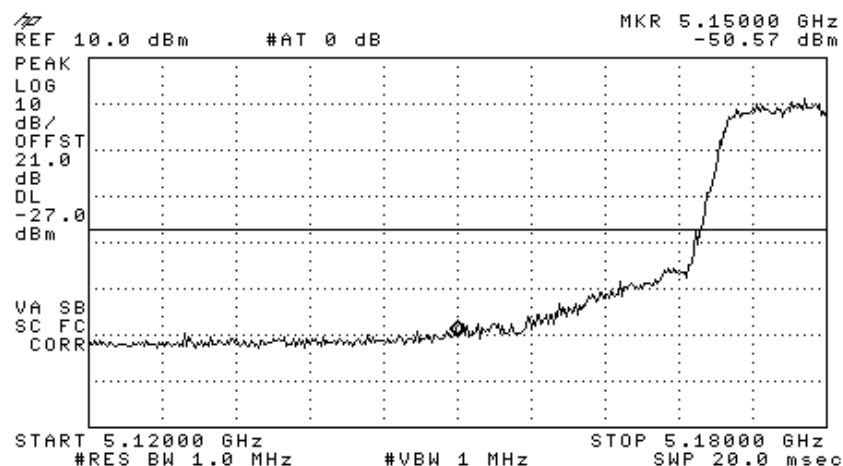


Figure 406 —5180 MHz 64QAM

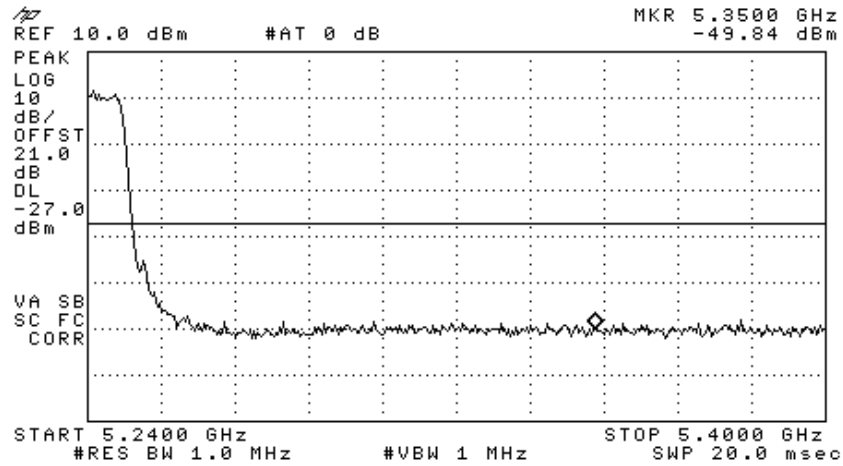


Figure 407 —5240 MHz 64QAM

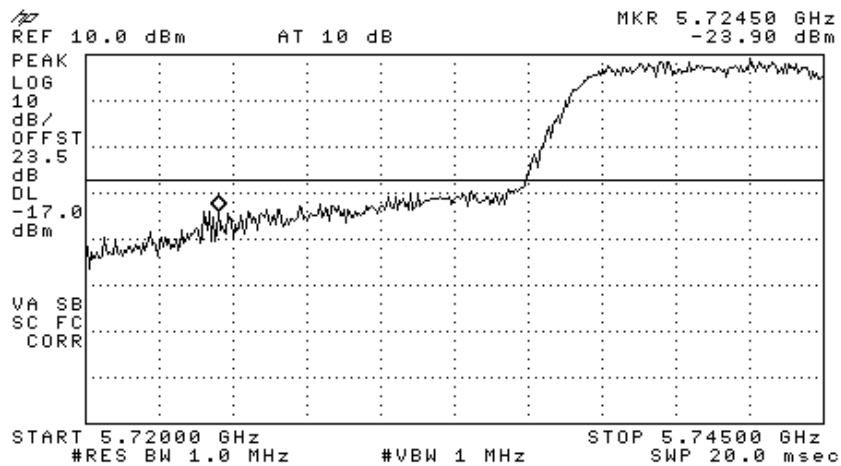


Figure 408 —5745 MHz 64QAM

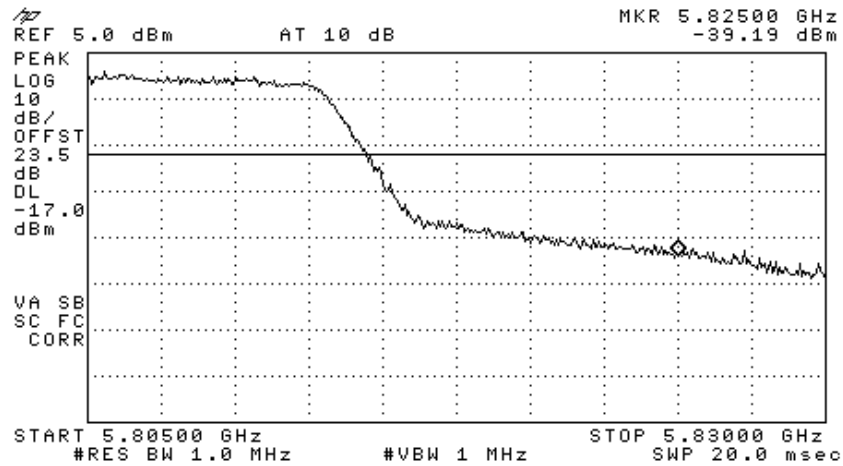


Figure 409 —5805 MHz 64QAM

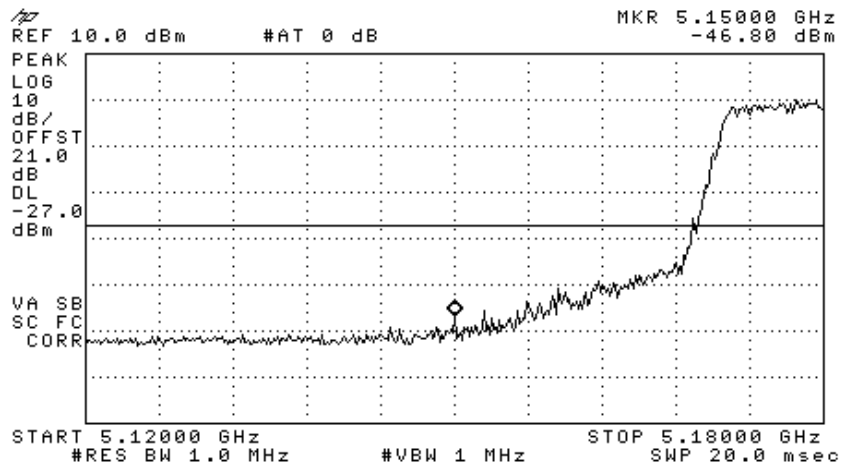


Figure 410 —5180 MHz BPSK

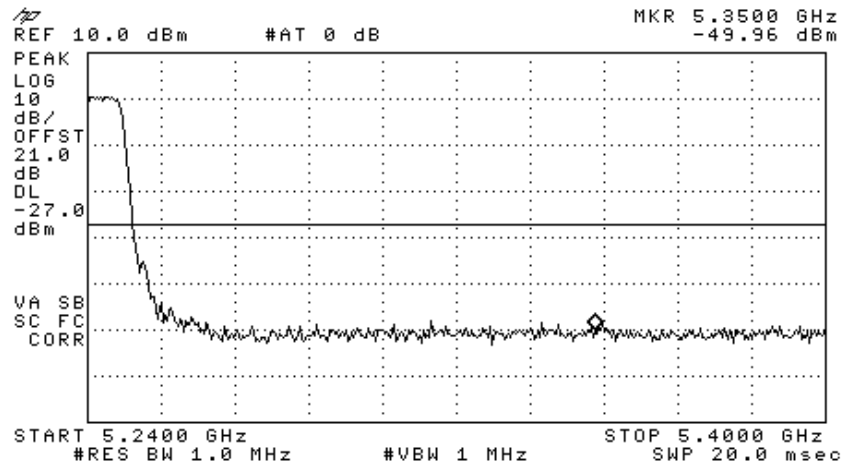


Figure 411 —5240 MHz BPSK

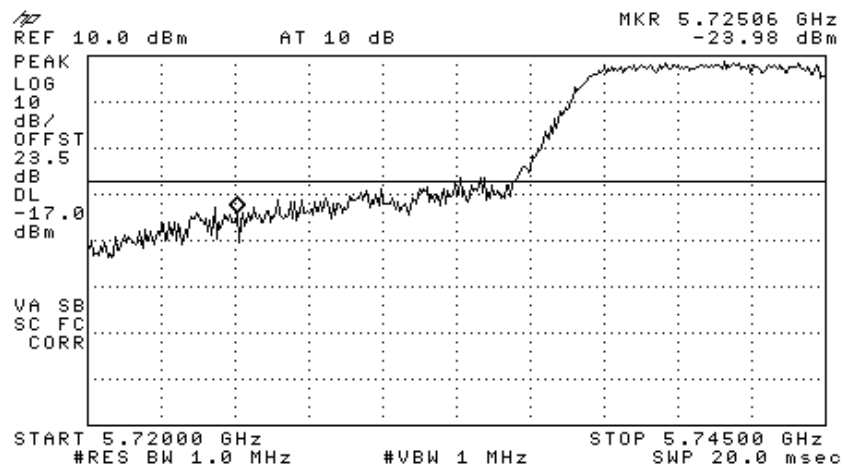


Figure 412 —5745 MHz BPSK

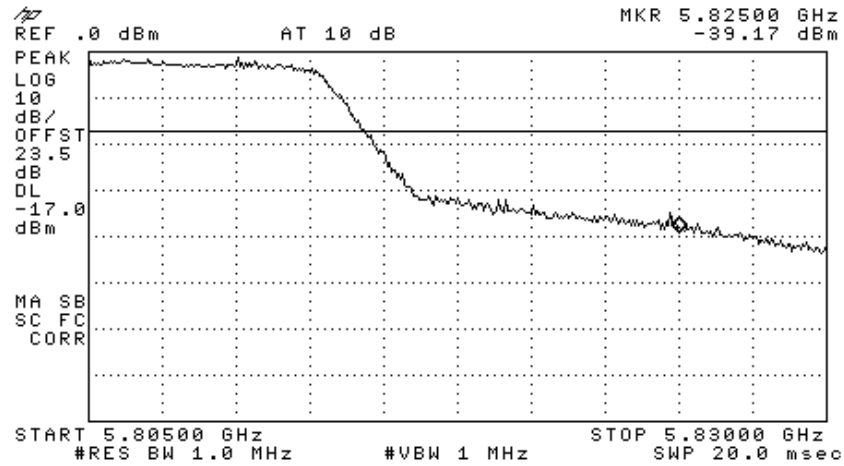


Figure 413 —5805 MHz BPSK

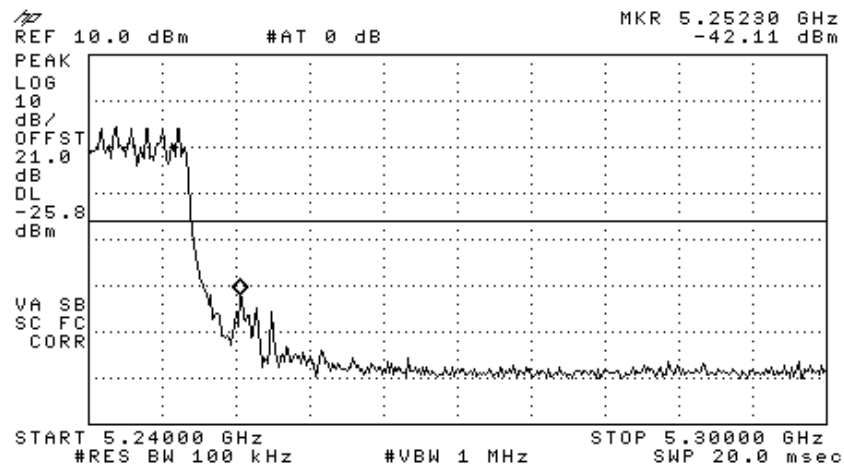


Figure 414 —Band Edge at 5.25 GHz Operation at 5.24 GHz 64QAM (Section 15.215(c))

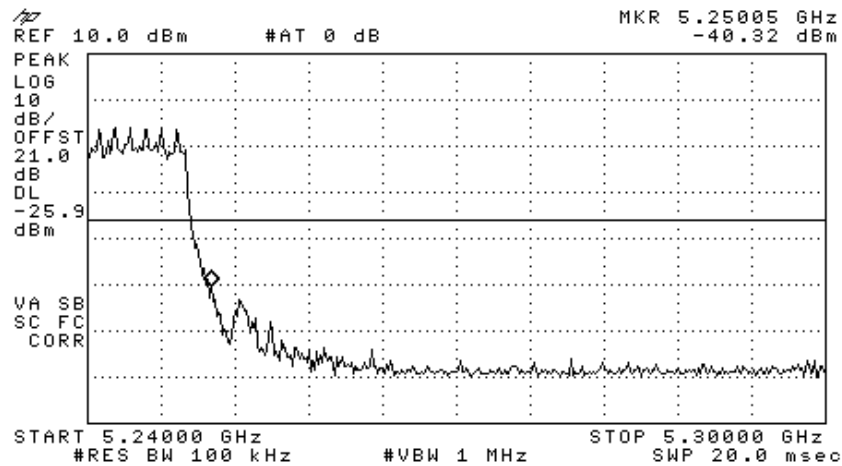


Figure 415 —Band Edge at 5.25 GHz Operation at 5.24 GHz BPSK (Section 15.215(c))

22.2 Results table

E.U.T. Description: WLAN Module With WCE (WiFi Coverage Extender) for DAS
 With 4 Cisco 1242 Access Points
 Model No.: 860M With WCE
 Serial Number: 1. 860M: 73903D 2. WCE: 739038
 Specification: F.C.C. Part 15, Subpart C (15.215(c))

Operation Frequency (MHz)	Modulation	Band Edge Frequency (MHz)	Result (dBc)	Specification (dBc)	Margin (dB)
5240	64QAM	5252	-42.11	20.0	-22.11
	BPSK	5252	-40.32	20.0	-20.32

Figure 416 Band Edge at 5.25 GHz operation at 5.24 GHz

JUDGEMENT: Passed by dB

TEST PERSONNEL:

Tester Signature: _____

Date:

Typed/Printed Name: E. Pitt

22.3 Results table

E.U.T. Description: WLAN Module With WCE (WiFi Coverage Extender) for DAS
 With 4 Cisco 1242 Access Points
 Model No.: 860M With WCE
 Serial Number: 1. 860M: 73903D 2. WCE: 739038
 Specification: F.C.C. Part 15, Subpart C (15.407)

Operation Frequency (MHz)	Modulation	Band Edge Frequency (MHz)	Result (dBm)	Specification (dBm)	Margin (dB)
5180	64QAM	5150	-50.57	-27.0	-23.57
	BPSK	5150	-46.80	-27.0	-19.80
5240	64QAM	5350	-49.84	-27.0	-22.84
	BPSK	5350	-49.96	-27.0	-22.96
5745	64QAM	5725	-23.90	-17.0	-6.90
	BPSK	5725	-23.98	-17.0	-6.98
5805	64QAM	5825	-39.19	-17.0	-22.19
	BPSK	5825	-39.17	-17.0	-22.17

Figure 417 Band Edge Spectrum

JUDGEMENT: Passed by 6.90 dB

TEST PERSONNEL:

Tester Signature: 

Date: 05.02.08

Typed/Printed Name: E. Pitt

22.4 Test Equipment Used.

Band edge Spectrum

Instrument	Manufacturer	Model	Serial/Part Number	Calibration	
				Last Calibr.	Period
Spectrum Analyzer	HP	8592L	3826A01204	February 22, 2007	1 year
Attenuator	Jyebao	-	FAT-AM5AF5G6G2W20	May 9, 2007	1 year
Cable	Rhophase	KPS-5000-KPS	A1674	February 8, 2007	1 year

Figure 418 Test Equipment Used

23. Antenna Gain 5GHz Transmitter 802.11b/g+802.11a + CELL + PCS Signals

The antenna gain is 7 dBi.

24. R.F Exposure/Safety 5GHz Transmitter 802.11b/g+802.11a + CELL + PCS Signals

Typical use of the E.U.T. is repeating WiFi signals for DAS. The typical placement of the E.U.T. is on a wall near the ceiling. The typical distance between the E.U.T. and the user in the worst case application, is >1 m.

Calculation of Maximum Permissible Exposure (MPE)
Based on Section 1.1307(b)(1) Requirements

(f) FCC limits at 5745 MHz is: $1 \frac{mW}{cm^2}$

Using table 1 of Section 1.1310 limit for general population/uncontrolled exposures, the above level is an average over 30 minutes.

(g) The power density produced by the E.U.T. is

$$S = \frac{P_t G_t}{4\pi R^2}$$

P_t - Transmitted Power (Peak) 85.1 mW= 19.3 dBm

G_t - Antenna Gain, 7 dBi = 5

R - Distance from Transmitter using 1 m worst case

(h) The peak power density is :

$$S_p = \frac{85.1 \times 5}{4\pi(100)^2} = 3.4 \times 10^{-3} \frac{mW}{cm^2}$$

(i) The duty cycle of transmission in actual worst case is 50%.

The average power source is:

$$42.55mW$$

(j) The averaged power density of the E.U.T. is:

$$S_{AV} = \frac{42.55 \times 5}{4\pi(100)^2} = 1.7 \times 10^{-3} \frac{mW}{cm^2}$$

(f) This is 3 orders of magnitude below the FCC limit.

25. Radiated Emission Per FCC Part 15 Sub-Part B Test Data 802.11b/g+802.11a + CELL + PCS Signals

25.1 Test Specification

30-40000 MHz, FCC Part 15, Subpart B, CLASS B

25.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 4.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The effect of varying the position of the cables was investigated to find the configuration that produces maximum emission.

The frequency range 30-4000 MHz was scanned, and the list of the highest emissions was verified and updated accordingly.

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 2.9 - 40 GHz, a spectrum analyzer including a low noise amplifier was used. The test distance was 3 meters. During peak measurements, the I.F. bandwidth was 1 MHz, and video bandwidth 3 MHz. During average measurements, the I.F. bandwidth was 1 MHz and video bandwidth was 100 Hz.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization. Verification of the E.U.T emissions was based on the following methods: turning the E.U.T on and off; using a frequency span less than 10 MHz; observation of the signal level during turntable rotation. (Background noise is not affected by the rotation of the E.U.T.)

The emissions were measured at a distance of 3 meters.

The E.U.T. was tested in both Rx and Tx modes.

The E.U.T. was tested at the operating frequencies of, 5180, 5200, 5240, 5745, 5765, and 5805 MHz using the following modulations: 64QAM, and BPSK.

25.3 Test Data

JUDGEMENT: Passed by 3.5 dB.

The results for all operating frequencies and modulations were the same.

The margin between the emission level and the specification limit is 3.5 dB in the worst case at the frequency of 39.70 MHz, vertical polarization.

The EUT met the requirements of the F.C.C. Part 15, Subpart B, specification.

The results for all operating frequencies and modulations were the same.

TEST PERSONNEL:

Tester Signature: 

Date: 05.02.08

Typed/Printed Name: A. Sharabi

Radiated Emission

E.U.T Description WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Cisco 1242 Access Points

Type 860M With WCE

Serial Number: 1. 860M: 73903D
2. WCE: 739038

Specification: FCC Part 15, Subpart B, Class B

Antenna Polarization: Horizontal
Antenna: 3 meters distance

Frequency range: 30 MHz to 300 MHz
Detectors: Peak, Quasi-peak

Frequency	Peak Amp	QP Amp	Correction	Specification	Margin
(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dBμV/m)	(dB)
39.70	31.7	27.3	13.4	40.0	-12.7
46.92	28.4	23.5	12.1	40.0	-16.5
162.58	36.0	31.7	15.4	43.5	-11.8
175.07	40.8	35.8	15.9	43.5	-7.7
207.20	37.1	32.2	18.0	43.5	-11.3
242.11	40.6	36.0	20.0	46.0	-10.0

**Figure 419. Radiated Emission. Antenna Polarization: HORIZONTAL.
Detectors: Peak, Quasi-peak**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Radiated Emission


E.U.T Description	WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Cisco 1242 Access Points
Type	860M With WCE
Serial Number:	1. 860M: 73903D 2. WCE: 739038

Specification: FCC Part 15, Subpart B, Class B

Antenna Polarization: Horizontal
Antenna: 3 meters distance

Frequency range: 30 MHz to 300 MHz
Detectors: Peak, Quasi-peak

13:48:32 FEB 04, 2008

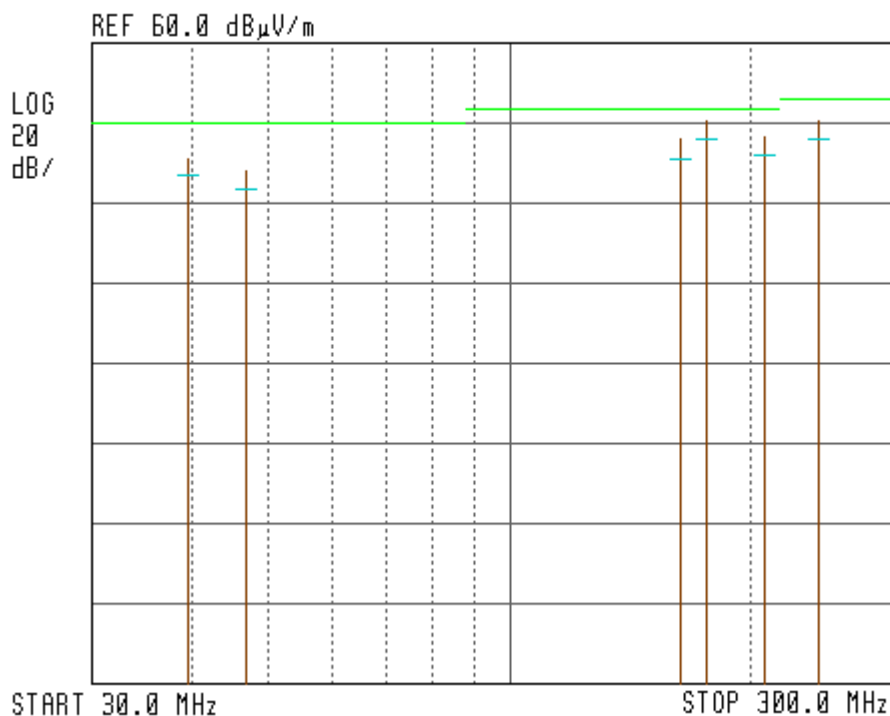

**Figure 420. Radiated Emission. Antenna Polarization: HORIZONTAL
Detectors: Peak, Quasi-peak**

Note:

1. Horizontal axis shows logarithmic frequency scale.
2. The vertical axis shows amplitude (in dB $\mu\text{V/m}$).
3. Peak detection is designated by the top of each vertical line.
4. Quasi-peak detection is designated by the first dash mark (from the top) of each vertical line.

Radiated Emission

E.U.T Description WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Cisco 1242 Access Points

Type 860M With WCE

Serial Number: 1. 860M: 73903D
2. WCE: 739038

Specification: FCC Part 15, Subpart B, Class B

Antenna Polarization: Vertical
Antenna: 3 meters distance

Frequency range: 30 MHz to 300 MHz
Detectors: Peak, Quasi-peak

Frequency	Peak Amp	QP Amp	Correction	Specification	Margin
(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dBμV/m)	(dB)
34.93	36.0	32.1	14.7	40.0	-7.9
39.70	41.6	36.5	13.4	40.0	-3.5
46.15	44.4	34.8	12.2	40.0	-5.2
162.58	41.6	38.8	15.4	43.5	-4.7
175.07	40.9	37.6	15.9	43.5	-5.9
242.11	38.6	34.7	20.0	46.0	-11.3

**Figure 421. Radiated Emission. Antenna Polarization: VERTICAL.
Detectors: Peak, Quasi-peak**

Note: Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Radiated Emission

E.U.T Description WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Cisco 1242 Access Points

Type 860M With WCE

Serial Number: 1. 860M: 73903D
2. WCE: 739038

Specification: FCC Part 15, Subpart B, Class B

Antenna Polarization: Vertical
Antenna: 3 meters distance

Frequency range: 30 MHz to 300 MHz
Detectors: Peak, Quasi-peak

12:34:02 FEB 04, 2008

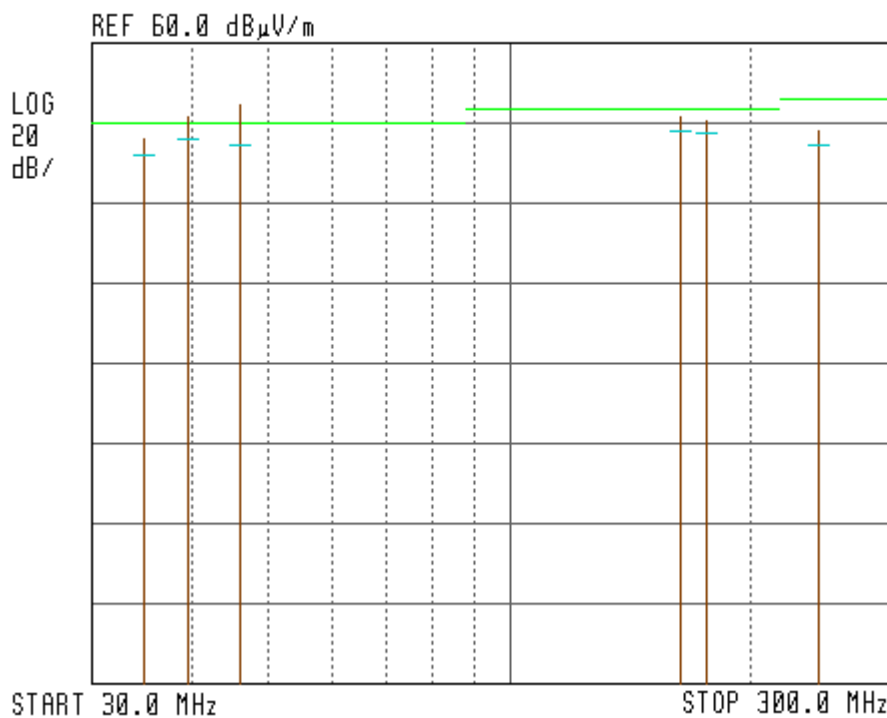


Figure 422. Radiated Emission. Antenna Polarization: VERTICAL. Detectors: Peak, Quasi-peak

Note:

1. Horizontal axis shows logarithmic frequency scale.
2. The vertical axis shows amplitude (in dB μV/m).
3. Peak detection is designated by the top of each vertical line.
4. Quasi-peak detection is designated by the first dash mark (from the top) of each vertical line.

25.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial No.	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 12, 2007	1 Year
RF Filter Section	HP	85420E	3705A00248	November 12, 2007	1 Year
Antenna Biconical	ARA	BCD 235/B	1041	March 22, 2007	1 Year
Antenna Log Periodic	ARA	LPD-2010/A	1038	November 22, 2007	1 Year
Antenna Log Periodic	A.H. Systems	SAS-200/511	253	February 4, 2007	2 Years
Double Ridged Waveguide Horn Antenna	EMCO	3115	29845	March 15, 2006	2 Years
Horn Antenna	ARA	SWH-28	1008	December 8, 2006	2 Years
Horn Antenna	Narda	V637	0410	December 8, 2006	2 Years
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS-0411N313	013	November 2, 2007	1 Year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	February 8, 2007	1 Year
Low Noise Amplifier	MK Milliwave	MKT6-3000 4000-30-13P	399	February 8, 2007	1 Year
Spectrum Analyzer	HP	8592L	3826A01204	February 22, 2007	1 Year
Spectrum Analyzer	HP	8564E	3442A00275	November 14, 2007	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKG19982	N/A	N/A

25.5 Field Strength Calculation

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$FS = RA + AF + CF$$

FS:	Field Strength [dB μ v/m]
RA:	Receiver Amplitude [dB μ v]
AF:	Receiving Antenna Correction Factor [dB/m]
CF:	Cable Attenuation Factor [dB]

No external pre-amplifiers are used.

26. Intermodulation Tests

26.1 Test procedure

An access point having maximum RF output power was used for this test.

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator (20 dB) and an appropriate coaxial cable (cable loss = 3.5 dB). The spectrum analyzer was set to 1 kHz resolution BW for the frequency range 9.0-150.0 kHz, 10kHz for the frequency range 10kHz-10.0MHz, 100kHz for the frequency range 10.0MHz-2.4385GHz, and 1MHz for the frequency range 2.4385-25.0GHz.

4 input signals were sent simultaneously to the E.U.T. as follows:

802.11b/g: in the frequency range 2400-2483 MHz, 2412MHz 64QAM

802.11a: in the frequency range 5150-5250 MHz, 5180MHz BPSK

CELL: in the frequency range 869-894 MHz, 890MHz FM dev. 100kHz

PCS: in the frequency range 1930-1990 MHz, 1985MHz CDMA

The frequency range of 9kHz – 40.0GHz was scanned for unwanted signals.

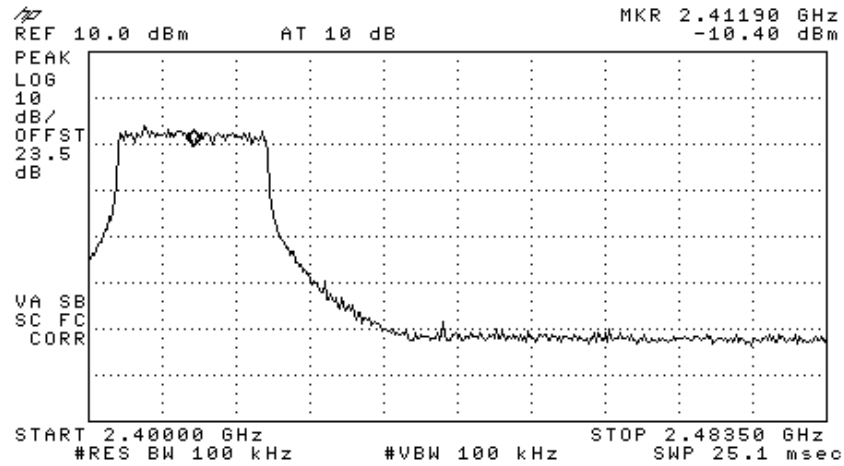


Figure 423 —2412MHz 64QAM

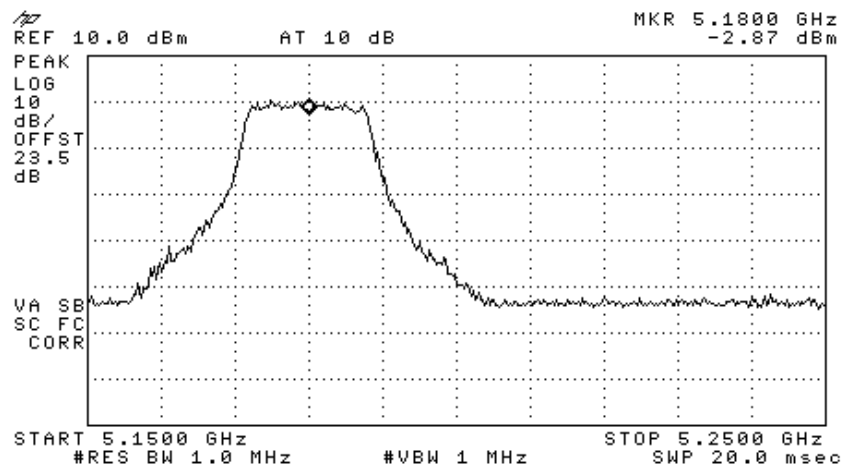


Figure 424 —5180MHz BPSK

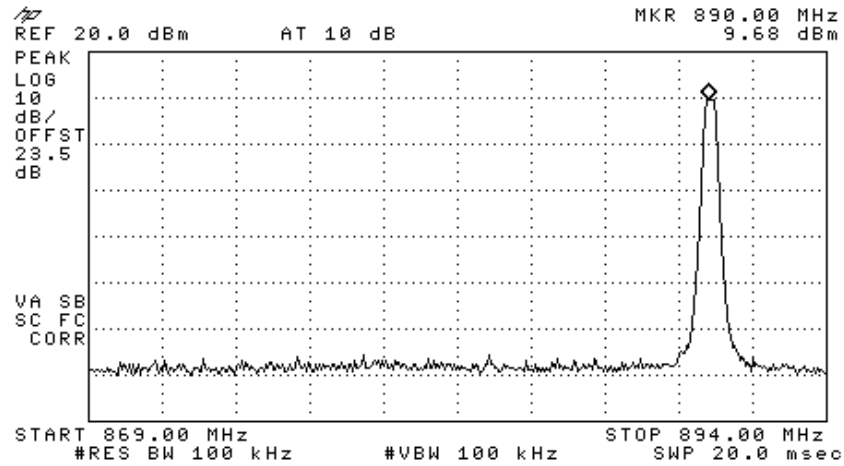


Figure 425 —890MHz FM

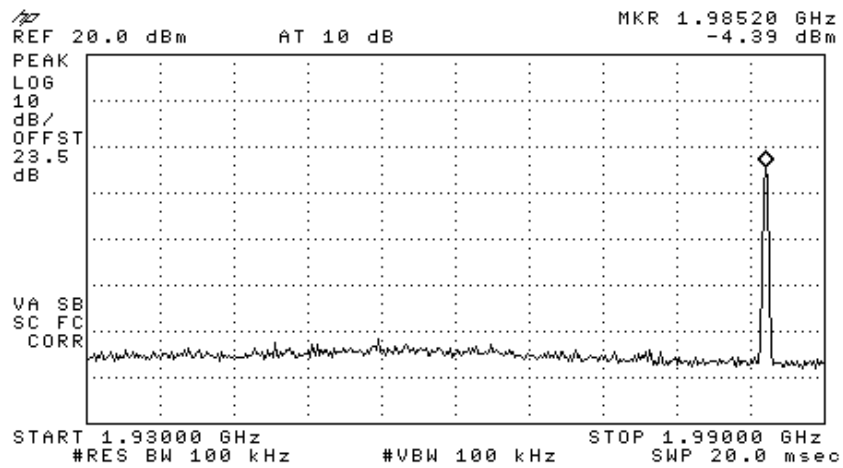


Figure 426 —1985MHz CDMA

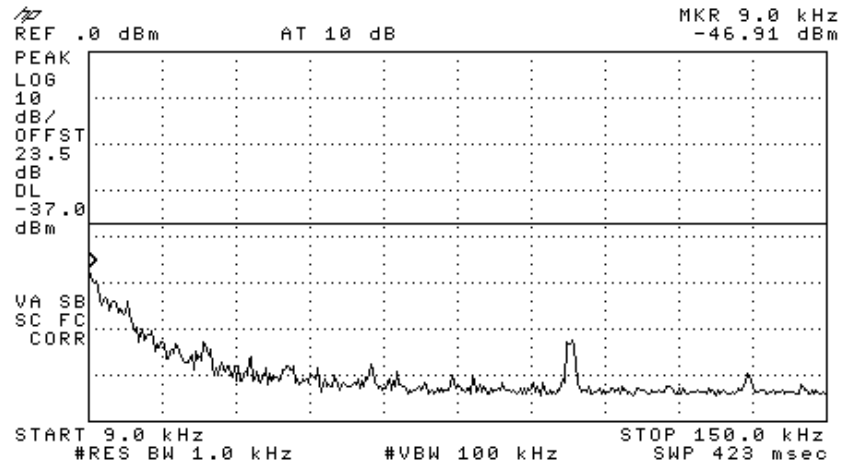


Figure 427

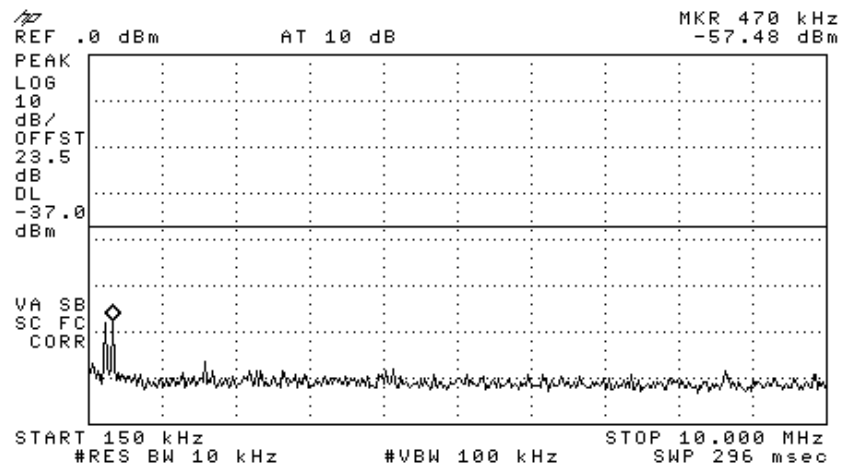


Figure 428

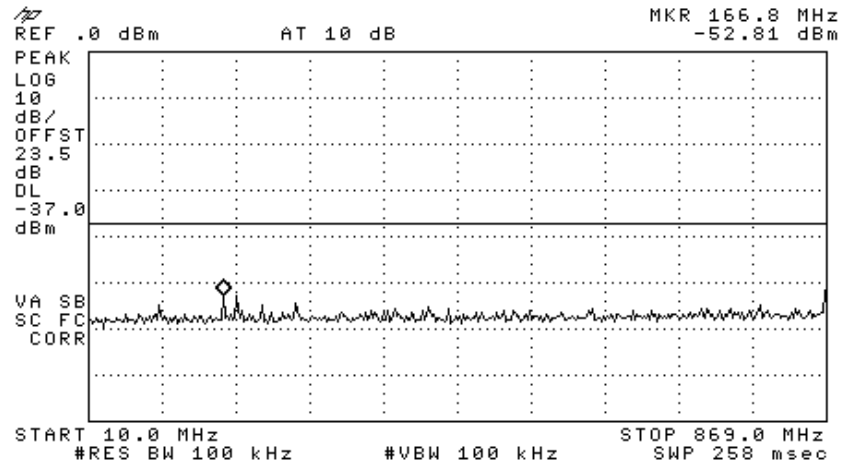


Figure 429

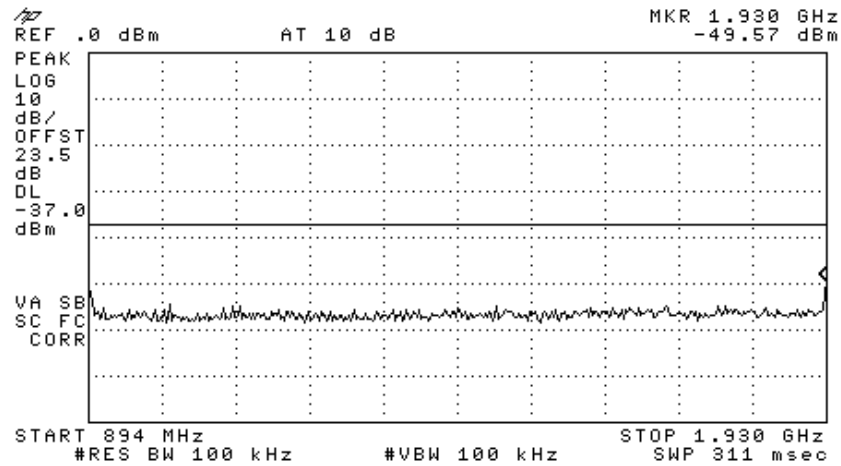


Figure 430

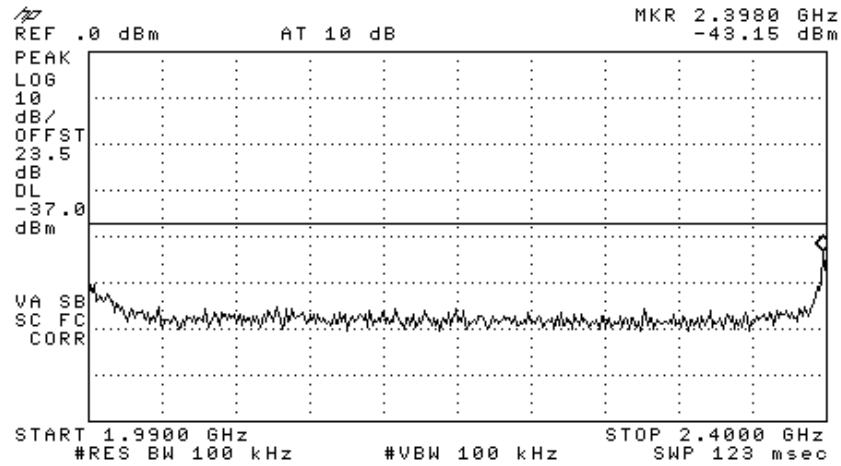


Figure 431

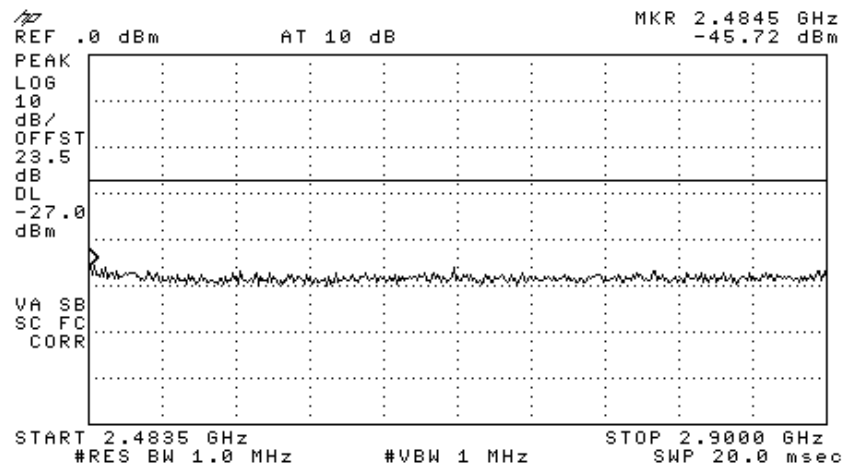


Figure 432

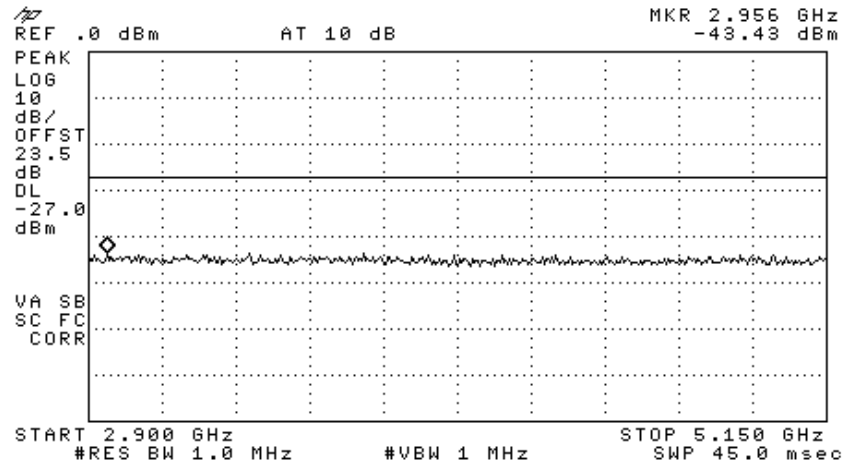


Figure 433

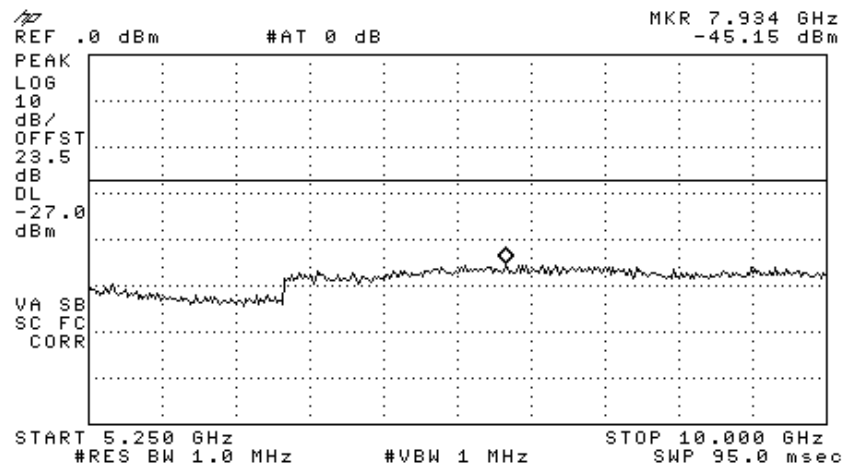


Figure 434

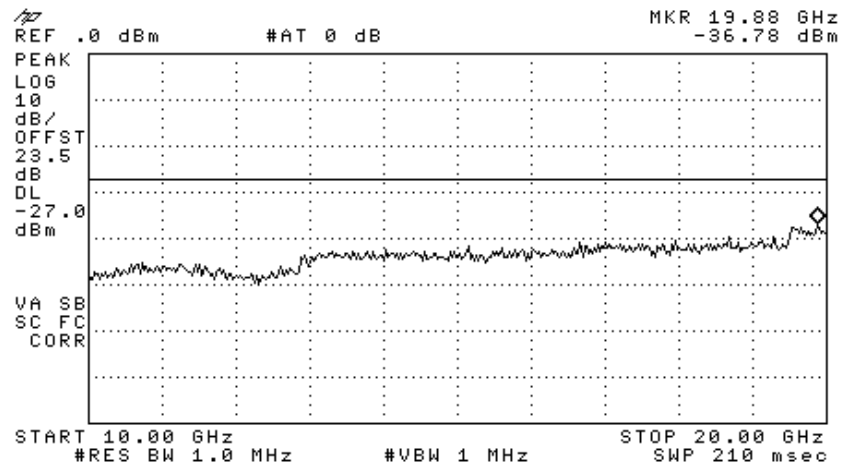


Figure 435

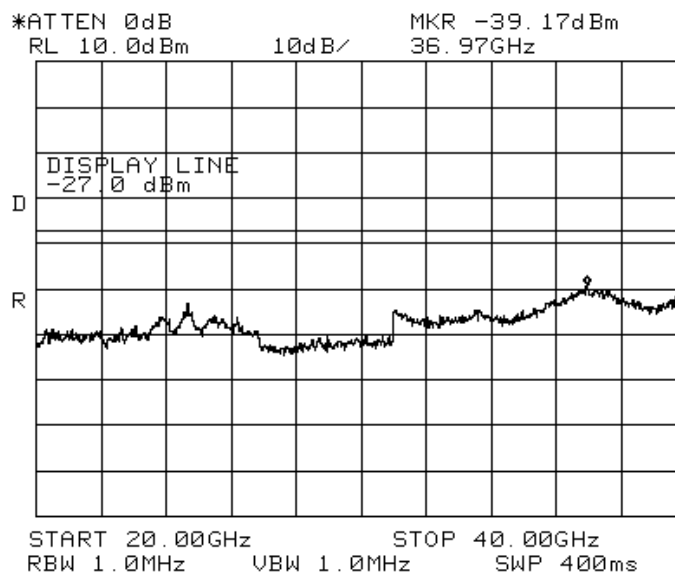


Figure 436

JUDGEMENT: Passed

TEST PERSONNEL:

Tester Signature: E. Pitt

Date: 05.02.08

Typed/Printed Name: E. Pitt

26.2 Test Equipment Used.

Intermodulation

Instrument	Manufacturer	Model	Serial/Part Number	Calibration	
				Last Calibr.	Period
Spectrum Analyzer	HP	8592L	3826A01204	February 22, 2007	1 year
Spectrum Analyzer	HP	8564E	3442A00275	November 26, 2006	1 year
Attenuator	Jyebao	-	FAT-AM5AF5G6G2W20	May 9, 2007	1 year
Cable	Rhophase	KPS-1501-1000	A1675	February 8, 2007	1 year

Figure 437 Test Equipment Used

27. APPENDIX A - CORRECTION FACTORS

27.1 Correction factors for

CABLE

from EMI receiver
to test antenna
at 3 meter range.

FREQUENCY (MHz)	CORRECTION FACTOR (dB)	FREQUENCY (MHz)	CORRECTION FACTOR (dB)
10.0	0.3	1200.0	7.3
20.0	0.6	1400.0	7.8
30.0	0.8	1600.0	8.4
40.0	0.9	1800.0	9.1
50.0	1.1	2000.0	9.9
60.0	1.2	2300.0	11.2
70.0	1.3	2600.0	12.2
80.0	1.4	2900.0	13.0
90.0	1.6		
100.0	1.7		
150.0	2.0		
200.0	2.3		
250.0	2.7		
300.0	3.1		
350.0	3.4		
400.0	3.7		
450.0	4.0		
500.0	4.3		
600.0	4.7		
700.0	5.3		
800.0	5.9		
900.0	6.3		
1000.0	6.7		

NOTES:

1. The cable type is RG-214.
2. The overall length of the cable is 27 meters.
3. The above data is located in file 27MO3MO.CBL on the disk marked "Radiated Emission Tests EMI Receiver".

27.2 Correction factors for CABLE
from EMI receiver
to test antenna
at 3 meter range.

FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.2
2.0	1.6
3.0	2.0
4.0	2.4
5.0	3.0
6.0	3.4
7.0	3.8
8.0	4.2
9.0	4.6
10.0	5.0
12.0	5.8

NOTES:

- 1. The cable type is RG-8.*
- 2. The overall length of the cable is 10 meters.*

27.3 Correction factors for

CABLE

from spectrum analyzer
to test antenna above 2.9 GHz

FREQUENCY (GHz)	CORRECTION FACTOR (dB)	FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.9	14.0	9.1
2.0	2.7	15.0	9.5
3.0	3.5	16.0	9.9
4.0	4.2	17.0	10.2
5.0	4.9	18.0	10.4
6.0	5.5	19.0	10.7
7.0	6.0	20.0	10.9
8.0	6.5	21.0	11.2
9.0	7.0	22.0	11.6
10.0	7.5	23.0	11.9
11.0	7.9	24.0	12.3
12.0	8.3	25.0	12.6
13.0	8.7	26.0	13.0

NOTES:

1. The cable type is SUCOFLEX 104 E manufactured by SUHNER.
2. The cable is used for measurements above 2.9 GHz.
3. The overall length of the cable is 10 meters.

27.4 Correction factors for

CABLE

from EMI receiver
to test antenna
at 10 meter range.

FREQUENCY (MHz)	CORRECTION FACTOR (dB)	FREQUENCY (MHz)	CORRECTION FACTOR (dB)
10.0	0.3	1200.0	9.8
20.0	0.8	1400.0	10.0
30.0	0.9	1600.0	11.3
40.0	1.2	1800.0	12.2
50.0	1.4	2000.0	13.1
60.0	1.6	2300.0	14.5
70.0	1.8	2600.0	15.9
80.0	1.9	2900.0	16.4
90.0	2.0		
100.0	2.1		
150.0	2.6		
200.0	3.2		
250.0	3.8		
300.0	4.2		
350.0	4.6		
400.0	5.1		
450.0	5.3		
500.0	5.6		
600.0	6.3		
700.0	7.0		
800.0	7.6		
900.0	8.0		
1000.0	8.7		

NOTES:

1. The cable type is RG-214.
2. The overall length of the cable is 34 meters.
3. The above data is located in file 34M10MO.CBL on the disk marked "Radiated Emissions Tests EMI Receiver".

12.6 Correction factors for LOG PERIODIC ANTENNA

**Type LPD 2010/A
at 3 and 10 meter ranges.**

Distance of 3 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.1
250.0	10.2
300.0	12.5
400.0	15.4
500.0	16.1
600.0	19.2
700.0	19.4
800.0	19.9
900.0	21.2
1000.0	23.5

Distance of 10 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.0
250.0	10.1
300.0	11.8
400.0	15.3
500.0	15.6
600.0	18.7
700.0	19.1
800.0	20.2
900.0	21.1
1000.0	23.2

NOTES:

1. Antenna serial number is 1038.
2. The above lists are located in file number 38M30.ANT for a 3 meter range,
and file number 38M100.ANT for a 10 meter range.
3. The files mentioned above are located on the disk marked "Radiated Emission
Test EMI Receiver".

27.5 Correction factors for

LOG PERIODIC ANTENNA

**Type SAS-200/511
at 3 meter range.**

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
1.0	24.9
1.5	27.8
2.0	29.9
2.5	31.2
3.0	32.8
3.5	33.6
4.0	34.3
4.5	35.2
5.0	36.2
5.5	36.7
6.0	37.2
6.5	38.1

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
7.0	38.6
7.5	39.2
8.0	39.9
8.5	40.4
9.0	40.8
9.5	41.1
10.0	41.7
10.5	42.4
11.0	42.5
11.5	43.1
12.0	43.4
12.5	44.4
13.0	44.6

NOTES:

1. Antenna serial number is 253.
2. The above lists are located in file number SAS3M0.ANT for a 3 meter range.
3. The files mentioned above are located on the disk marked "Antenna Factors".

27.6 Correction factors for BICONICAL ANTENNA
Type BCD-235/B,
at 3 meter range

FREQUENCY (MHz)	AFE (dB/m)
20.0	19.4
30.0	14.8
40.0	11.9
50.0	10.2
60.0	9.1
70.0	8.5
80.0	8.9
90.0	9.6
100.0	10.3
110.0	11.0
120.0	11.5
130.0	11.7
140.0	12.1
150.0	12.6
160.0	12.8
170.0	13.0
180.0	13.5
190.0	14.0
200.0	14.8
210.0	15.3
220.0	15.8
230.0	16.2
240.0	16.6
250.0	17.6
260.0	18.2
270.0	18.4
280.0	18.7
290.0	19.2
300.0	19.9
310	20.7
320	21.9
330	23.4
340	25.1
350	27.0

NOTES:

1. Antenna serial number is 1041.
2. The above list is located in file 19BC10M1.ANT on the disk marked "Radiated Emissions Tests EMI Receiver".

27.7 Correction factors for BICONICAL ANTENNA
Type BCD-235/B,
10 meter range

FREQUENCY (MHz)	AFE (dB/m)
30.0	12.1
40.0	10.6
50.0	10.6
60.0	8.9
70.0	8.5
80.0	9.6
90.0	9.4
100.0	9.6
110.0	10.3
120.0	10.7
130.0	12.6
140.0	12.7
150.0	12.7
160.0	13.8
170.0	13.7
180.0	14.9
190.0	13.4
200.0	13.1
210.0	14.0
220.0	14.5
230.0	15.8
240.0	16.0
250.0	16.6
260.0	16.7
270.0	18.3
280.0	18.5
290.0	19.3
300.0	20.9

NOTES:

1. Antenna serial number is 1041.
2. The above list is located in file 41BC10M1.ANT on the disk marked "Radiated Emissions Tests EMI Receiver".

27.8 Correction factors for Double-Ridged Waveguide Horn

**Model: 3115, S/N 29845
at 3 meter range.**

FREQUENCY	ANTENNA	ANTENN	FREQUENCY	ANTENNA	ANTENNA
(GHz)	FACTOR	A Gain	(GHz)	FACTOR	Gain
1.0	24.8	5.4	10.0	38.8	11.4
1.5	26.1	7.6	10.5	38.9	11.8
2.0	28.6	7.7	11.0	39.0	12.1
2.5	29.8	8.4	11.5	39.6	11.8
3.0	31.4	8.4	12.0	39.8	12.0
3.5	32.4	8.7	12.5	39.6	12.5
4.0	33.7	8.6	13.0	40.0	12.5
4.5	33.4	9.9	13.5	39.8	13.0
5.0	34.5	9.7	14.0	40.2	13.0
5.5	35.1	9.9	14.5	40.6	12.9
6.0	35.4	10.4	15.0	41.3	12.4
6.5	35.6	10.8	15.5	39.5	14.6
7.0	36.2	10.9	16.0	38.8	15.5
7.5	37.3	10.4	16.5	40.0	14.6
8.0	37.7	10.6	17.0	41.4	13.4
8.5	38.3	10.5	17.5	44.8	10.3
9.0	38.5	10.8	18.0	47.2	8.1
9.5	38.7	11.1			

27.9 Correction factors for

Horn Antenna
Model: SWH-28
at 1 meter range.

FREQUENCY (GHz)	APE (dB /m)	Gain (dB1)
18.0	40.3	16.1
19.0	40.3	16.3
20.0	40.3	16.1
21.0	40.3	16.3
22.0	40.4	16.8
23.0	40.5	16.4
24.0	40.5	16.6
25.0	40.5	16.7
26.0	40.6	16.4

27.10 Correction factors for

Horn Antenna Model: V637

FREQUENCY (GHz)	AFE (dB /m)	Gain (dB1)
26.0	43.6	14.9
27.0	43.7	15.1
28.0	43.8	15.3
29.0	43.9	15.5
30.0	43.9	15.8
31.0	44.0	16.0
32.0	44.1	16.2
33.0	44.1	16.4
34.0	44.1	16.7
35.0	44.2	16.9
36.0	44.2	17.1
37.0	44.2	17.4
38.0	44.2	17.6
39.0	44.2	17.8
40.0	44.2	18.0

27.11 Correction factors for ACTIVE LOOP ANTENNA

Model 6502

S/N 9506-2950

FREQUENCY	Magnetic Antenna Factor	Electric Antenna Factor
(MHz)	(dB)	(dB)
.009	-35.1	16.4
.010	-35.7	15.8
.020	-38.5	13.0
.050	-39.6	11.9
.075	-39.8	11.8
.100	-40.0	11.6
.150	-40.0	11.5
.250	-40.0	11.6
.500	-40.0	11.5
.750	-40.1	11.5
1.000	-39.9	11.7
2.000	-39.5	12.0
3.000	-39.4	12.1
4.000	-39.7	11.9
5.000	-39.7	11.8
10.000	40.2	11.3
15.000	-40.7	10.8
20.000	-40.5	11.0
25.000	-41.3	10.2
30.000	42.3	9.2