

DATE: 28 February 2008

I.T.L. (PRODUCT TESTING) LTD.
FCC EMC/Radio Test Report
for
MobileAccess Networks

Equipment under test:


**WLAN Module With WCE (WiFi Coverage Extender) for
DAS With 4 Meru AP200 Access Points**

860M With WCE*

* See customer's declaration on page 7.

Written by: 
D. Shidowsky, Documentation

Approved by: 
E. Pitt, Test Engineer

Approved by: 
I. Raz, EMC Laboratory Manager

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.



Measurement/Technical Report for MobileAccess Networks

WLAN Module With WCE (WiFi Coverage Extender) for DAS With
4 Meru AP200 Access Points

860M With WCE

FCC ID: OJFMA860WME

28 February 2008

This report concerns: Original Grant x Class II change

Class B verification Class A verification Class I change

Equipment type: Direct Sequence Spread Spectrum Transmitter

Request Issue of Grant:

x Immediately upon completion of review

Limits used:

CISPR 22 Part 15 x

Measurement procedure used is ANSI C63.4-2003.

Application for Certification

prepared by:

Ishaishou Raz

ITL (Product Testing) Ltd.

Kfar Bin Nun

D.N. Shimshon 99780

Israel

e-mail Sraz@itl.co.il

Applicant for this device:

(different from "prepared by")

Steve Blum

Mobile Access Networks

8391 Old Courthouse Rd., Suite #300

Vienna, VA. 22182

U.S.A.

Tel: +1-541-758-2880

Fax: +1-703-848-0260

e-mail: sblum@mobileaccess.com

TABLE OF CONTENTS

1. GENERAL INFORMATION -----	6
1.1 Administrative Information.....	6
1.2 List of Accreditations	8
1.3 Product Description	9
1.4 Test Methodology.....	9
1.5 Test Facility	9
1.6 Measurement Uncertainty	9
2. SYSTEM TEST CONFIGURATION-----	10
2.1 Justification.....	10
2.2 EUT Exercise Software	10
2.3 Special Accessories	10
2.4 Equipment Modifications	10
2.5 Configuration of Tested System.....	11
3. THEORY OF OPERATION -----	12
3.1 Theory of Operation	12
4. SPURIOUS RADIATED EMISSION IN THE RESTRICTED BAND, BELOW 1 GHZ 5GHZ TRANSMITTER 802.11B/G+802.11A SIGNALS-----	14
4.1 Test Specification	14
4.2 Test Procedure.....	14
4.3 Test Data	15
4.4 Test Instrumentation Used, Radiated Measurements	20
4.5 Field Strength Calculation	21
5. SPURIOUS RADIATED EMISSION IN THE RESTRICTED BAND, ABOVE 1 GHZ 5GHZ TRANSMITTER 802.11B/G+802.11A SIGNALS-----	22
5.1 Radiated Emission Above 1 GHz.....	22
5.2 Test Data.....	23
5.3 Test Instrumentation Used, Radiated Measurements Above 1 GHz	36
6. 26 DB BANDWIDTH 5 GHZ TRANSMITTER 802.11B/G+802.11A SIGNALS -----	37
6.1 Test procedure	37
6.2 Test Equipment Used.....	44
7. MAXIMUM CONDUCTED OUTPUT POWER 5 GHZ TRANSMITTER 802.11B/G+802.11A SIGNALS-----	45
7.1 Test procedure	45
7.2 Results table.....	52
7.3 Test Equipment Used.....	53
8. PEAK POWER SPECTRAL DENSITY 5GHZ TRANSMITTER 802.11B/G+802.11A SIGNALS -----	54
8.1 Test procedure	54
8.2 Results table.....	60
8.3 Test Equipment Used.....	61
9. RATIO OF PEAK EXCURSION OF MODULATION ENVELOPE TO MAXIMUM CONDUCTED OUTPUT POWER 5GHZ TRANSMITTER 802.11B/G+802.11A SIGNALS -----	62
9.1 Test procedure	62
9.2 Results table.....	68
9.3 Test Equipment Used.....	69
10. PEAK POWER OUTPUT OUT OF 5150-5250; 5725-5825 MHZ BANDS 5 GHZ TRANSMITTER 802.11B/G+802.11A SIGNALS-----	70
10.1 Test procedure	70
10.2 Results table.....	115
10.3 Test Equipment Used.....	116

11. BAND EDGE SPECTRUM 5GHZ TRANSMITTER 802.11B/G+802.11A SIGNALS	117
11.1 Test procedure	117
11.2 Results table.....	122
11.3 Results table.....	123
11.4 Test Equipment Used.....	124
12. ANTENNA GAIN 5GHZ TRANSMITTER 802.11B/G+802.11A SIGNALS	125
13. R.F EXPOSURE/SAFETY 5GHZ TRANSMITTER 802.11B/G+802.11A SIGNALS	126
14. RADIATED EMISSION PER FCC PART 15 SUB-PART B TEST DATA 802.11B/G+802.11A SIGNALS	127
14.1 Test Specification	127
14.2 Test Procedure.....	127
14.3 Test Data.....	128
14.4 Test Instrumentation Used, Radiated Measurements	133
14.5 Field Strength Calculation	134
15. SPURIOUS RADIATED EMISSION IN THE RESTRICTED BAND, BELOW 1 GHZ 5GHZ TRANSMITTER 802.11B/G+802.11A + CELL + PCS SIGNALS	135
15.1 Test Specification	135
15.2 Test Procedure.....	135
15.3 Test Data.....	136
15.4 Test Instrumentation Used, Radiated Measurements	141
15.5 Field Strength Calculation	142
16. SPURIOUS RADIATED EMISSION IN THE RESTRICTED BAND, ABOVE 1 GHZ 5GHZ TRANSMITTER 802.11B/G+802.11A + CELL + PCS SIGNALS	143
16.1 Radiated Emission Above 1 GHz.....	143
16.2 Test Data.....	144
16.3 Test Instrumentation Used, Radiated Measurements Above 1 GHz.....	157
17. 26 DB BANDWIDTH 5 GHZ TRANSMITTER 802.11B/G+802.11A + CELL + PCS SIGNALS	158
17.1 Test procedure	158
17.2 Test Equipment Used.....	165
18. MAXIMUM CONDUCTED OUTPUT POWER 5 GHZ TRANSMITTER 802.11B/G+802.11A + CELL + PCS SIGNALS	166
18.1 Test procedure	166
18.2 Results table.....	173
18.3 Test Equipment Used.....	174
19. PEAK POWER SPECTRAL DENSITY 5GHZ TRANSMITTER 802.11B/G+802.11A + CELL + PCS SIGNALS	175
19.1 Test procedure	175
19.2 Results table.....	181
19.3 Test Equipment Used.....	182
20. RATIO OF PEAK EXCURSION OF MODULATION ENVELOPE TO MAXIMUM CONDUCTED OUTPUT POWER 5GHZ TRANSMITTER 802.11B/G+802.11A + CELL + PCS SIGNALS	183
20.1 Test procedure	183
20.2 Results table.....	189
20.3 Test Equipment Used.....	190
21. PEAK POWER OUTPUT OUT OF 5150-5250; 5725-5825 MHZ BANDS 5 GHZ TRANSMITTER 802.11B/G+802.11A + CELL + PCS SIGNALS	191
21.1 Test procedure	191
21.2 Results table.....	234
21.3 Test Equipment Used.....	235

22. BAND EDGE SPECTRUM 5GHZ TRANSMITTER 802.11B/G+802.11A + CELL + PCS SIGNALS -----	236
22.1 Test procedure	236
22.2 Results table.....	241
22.3 Results table.....	242
22.4 Test Equipment Used.....	243
23. ANTENNA GAIN 5GHZ TRANSMITTER 802.11B/G+802.11A + CELL + PCS SIGNALS -----	244
24. R.F EXPOSURE/SAFETY 5GHZ TRANSMITTER 802.11B/G+802.11A + CELL + PCS SIGNALS -----	245
25. RADIATED EMISSION PER FCC PART 15 SUB-PART B TEST DATA 802.11B/G+802.11A + CELL + PCS SIGNALS -----	246
25.1 Test Specification	246
25.2 Test Procedure.....	246
25.3 Test Data.....	247
25.4 Test Instrumentation Used, Radiated Measurements	252
25.5 Field Strength Calculation	253
26. INTERMODULATION TESTS-----	254
26.1 Test procedure	254
26.2 Test Equipment Used.....	262
27. APPENDIX A - CORRECTION FACTORS-----	263
27.1 Correction factors for CABLE	263
27.2 Correction factors for CABLE	264
27.3 Correction factors for CABLE	265
27.4 Correction factors for CABLE	266
27.6 Correction factors for LOG PERIODIC ANTENNA	267
27.5 Correction factors for LOG PERIODIC ANTENNA	268
27.6 Correction factors for BICONICAL ANTENNA	269
27.7 Correction factors for BICONICAL ANTENNA.....	270
27.8 Correction factors for Double-Ridged Waveguide Horn	271
27.9 Correction factors for Horn Antenna	272
27.10 Correction factors for Horn Antenna	273
27.11 Correction factors for ACTIVE LOOP ANTENNA	274

1. General Information

1.1 Administrative Information

Manufacturer: MobileAccess Networks

Manufacturer's Address: 8391 Old Courthouse Rd.
Suite #300
Vienna, VA 22182
U.S.A.
Tel: +1-541-758-2880
Fax: +1-703-848-0260

Manufacturer's Representative: Steve Blum

Equipment Under Test (E.U.T): WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points

Equipment Model No.: 860M With WCE (See customer's declaration on following page).

Equipment Serial No.: 1. 860M: 73903D
2. WCE: 739038

Date of Receipt of E.U.T: 19.02.08

Start of Test: 19.02.08

End of Test: 28.02.08

Test Laboratory Location: I.T.L (Product Testing) Ltd.
Kfar Bin Nun,
ISRAEL 99780

Test Specifications: See Section 2

Note: Tests using the spectrum analyzer HP 8592L, S/N 3826A01204, were performed between 11-21 February 2008.



15/11/2007

DECLARATION

I HEREBY DECLARE THAT THE FOLLOWING PRODUCT:

860M

IS IDENTICAL ELECTRONICALLY, PHYSICALLY, AND
MECHANICALLY TO:

MA-860

Please relate to them all (from an EMC point of view) as the
same product.

Thank you,

Signature: 

Shai Rachamim
Verification Engineer
MobileAccess Networks
Ofek One Center, Bldg.2
Northern Industrial Zone
Lod, Israel 71293

E-mail: ShaiR@MobileAccess.com
Wired: +972-8-9183804
Unwired: +972-52-6994548



1.2 List of Accreditations

The EMC laboratory of I.T.L. is accredited by the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), Registration No. 90715.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-1350, R-1285.
5. Industry Canada (Canada), File No. IC 4025.
6. TUV Product Services, England, ASLLAS No. 97201.
7. Nemko (Norway), Authorization No. ELA 207.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.

1.3 Product Description

The MobileAccess 860 WLAN Solution delivers pervasive WLAN coverage throughout enterprise environments using a unique multi-service wireless architecture. With the MA-860 approach, enterprises can seamlessly translate their WLAN investments and design expertise into a comprehensive, multi-service wireless solution.

The MA-860 combines WLAN services with signals from other wireless sources, including voice and data services from multiple wireless operators, public safety, and building automation applications. It then distributes the combined RF signals over a common set of broadband cables and antennas. One-Click calibration between the MA-860 module and the MobileAccess Wi-Fi Coverage Expander (WCE) ensures optimal coverage by mirroring the coverage footprint and system behavior of “AP-on-Ceiling” deployments for 802.11a and 802.11b/g WLAN services.

This Wire-it-Once™ approach spreads WLAN deployment costs across multiple wireless service needs, providing facility-wide coverage for WLAN and all other wireless services while creating a flexible infrastructure that adapts to evolving technology requirements.

In addition, the MA-860 WLAN solution locates Access Points (APs) in secure telecom closets alongside other LAN internetworking equipment, yielding significant operational benefits:

- Provides physical security of the APs
- Makes APs more accessible to IT staff
- Reduces ongoing operational expenses

1.4 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4: 2003. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.5 Test Facility

The radiated emissions tests were performed at I.T.L.’s testing facility at Kfar Bin-Nun, Israel. This site is a FCC listed test laboratory (FCC Registration No. 90715, date of listing August 22, 2006).

I.T.L.’s EMC Laboratory is also accredited by A2LA, certificate No. 1152.01.

1.6 Measurement Uncertainty

Radiated Emission

The Open Site complies with the ± 4 dB Normalized Site Attenuation requirements of ANSI C63.4-2003. In accordance with Paragraph 5.4.6.1 of this standard, this tolerance includes instrumentation calibration errors, measurement technique errors, and errors due to site anomalies.

2. System Test Configuration

2.1 *Justification*

The EUT consists of the 860M, WCE and an access point. The system combines 802.11 signals with the cellular signals. The cellular signal are represented in the setup by the CELL and PCS portion of the setup, which were connected to the EUT through MobileAccess standard infrastructure (i.e. RIU, BU, RHU and a controller) to represent a normal installation of the EUT. CELL and PCS portions were used for intermodulation tests only.

An “Exercise” SW on the laptops was used to trigger the access points to transmit continuously, while the EUT output was connected to the spectrum analyzer.

2.2 *EUT Exercise Software*

The Acces Point (AP) (as part of the EUT) was triggered to transmit using an “Exercise SW”.

The program “Air Magnet” was used to trigger the AP to continuously transmit packets.

2.3 *Special Accessories*

No special accessories were needed to achieve compliance.

2.4 *Equipment Modifications*

No modifications were necessary in order o achieve compliance.

2.5 Configuration of Tested System

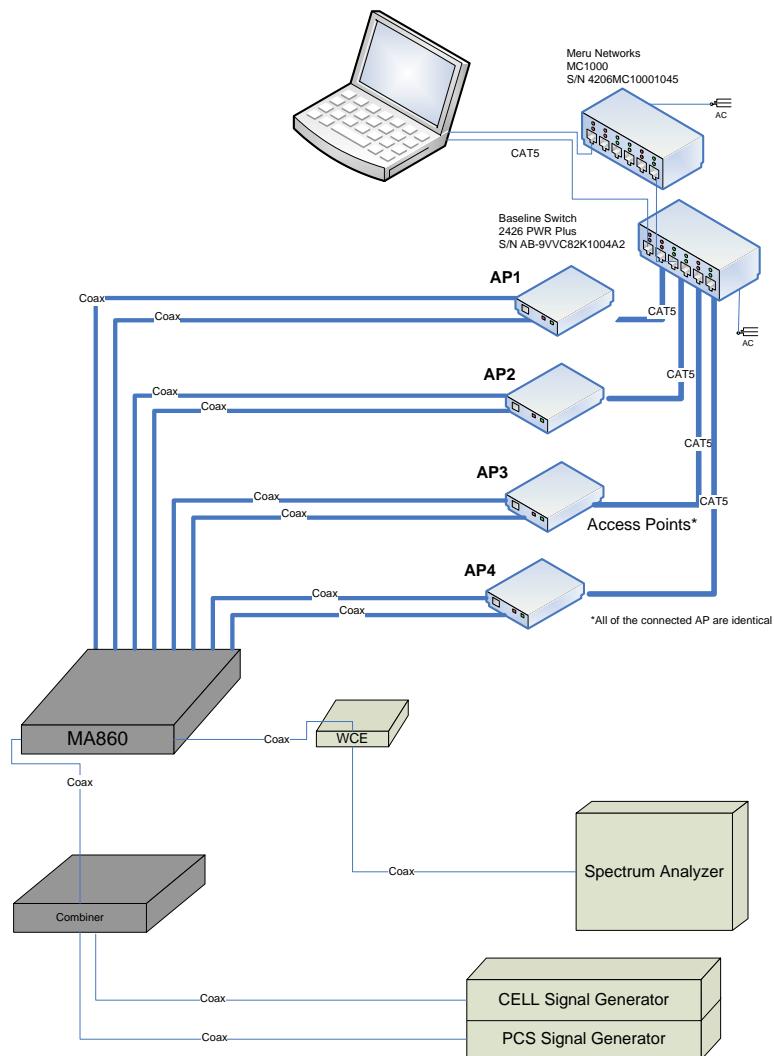


Figure 1. Configuration of Tested System

Note: The system was tested using four identical Meru Access Points
 M/N AP200, S/N: 0406AP20800CE6005A1D,
 S/N: 5305AP208000CE6004F50, S/N: 0406AP208000CE600594B,
 S/N: 5105AP208000CE600484A, FCC ID: RE7-AP200.

3. Theory of Operation

3.1 Theory of Operation


MA-860 WLAN Solution

MA-860 Solution Overview

The MobileAccess 860 WLAN Solution delivers pervasive WLAN coverage throughout enterprise environments using a unique multi-service wireless architecture. With the MA-860 approach, enterprises can seamlessly translate their WLAN investments and design expertise into a comprehensive, multi-service wireless solution.

The MA-860 combines WLAN services with signals from other wireless sources, including voice and data services from multiple wireless operators, public safety, and building automation applications. It then distributes the combined RF signals over a common set of broadband cables and antennas. One-Click calibration between the MA-860 module and the MobileAccess Wi-Fi Coverage Expander (WCE) ensures optimal coverage by mirroring the coverage footprint and system behavior of "AP-on-Ceiling" deployments for 802.11a and 802.11b/g WLAN services.

This Wire-it-Once™ approach spreads WLAN deployment costs across multiple wireless service needs, providing facility-wide coverage for WLAN and all other wireless services while creating a flexible infrastructure that adapts to evolving technology requirements.

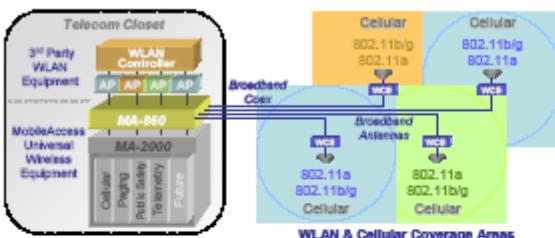

In addition, the MA-860 WLAN solution locates Access Points (APs) in secure telecom closets alongside other LAN internetworking equipment, yielding significant operational benefits:

- ▶ Provides physical security of the APs
- ▶ Makes APs more accessible to IT staff
- ▶ Reduces ongoing operational expenses

Making Wireless an Indoor State of Mind

MobileAccess 860 WLAN Module



Benefits

Cost-Effective Multi-Service Solution

- ▶ Delivers WLAN and other wireless RF signals over a single multi-service infrastructure
- ▶ Spreads WLAN deployment costs across multiple wireless services

Dependable WLAN Coverage

- ▶ MobileAccess WLAN architecture mirrors the behaviors and coverage footprint of "AP-on-Ceiling" deployment
- ▶ One-Click compensation ensures optimal 802.11b/g and 802.11a coverage
- ▶ Dedicated AP to antenna relationships ensure transparent support for WLAN applications such as VOIP and location services (RTLS)
- ▶ Redundant power option

Centralized & Secure AP Management

- ▶ Lowers operating expenses
- ▶ Provides physical security and simplifies management

Proactive End-to-End Monitoring

- ▶ Remote SNMP monitoring for status, alerting, and fault detection
- ▶ Monitoring extends to attached multi-service antennas

Simplified IT Deployment Model

- ▶ Uses standard WLAN design techniques



8391 Old Courthouse Road, Suite 300, Vienna, VA 22182
 Tel: (800)436-9266, (703) 848-0200 TAC: (800) 787-1266 Fax: (703) 848-0280
www.mobileaccess.com


MA-860 Product Specifications

802.11 RF Parameters			Power																									
860(M/R) with Wi-Fi Coverage Expander (WCE):			Power																									
<table border="1"> <thead> <tr> <th></th> <th>802.11a</th> <th>802.11b/g</th> </tr> </thead> <tbody> <tr> <td>Gain TX (dB)</td> <td>0</td> <td>0</td> </tr> <tr> <td>Output Power (dBm)</td> <td>17</td> <td>b: 20 g: 17</td> </tr> <tr> <td>Gain RX (dB)</td> <td>4</td> <td>4</td> </tr> <tr> <td>NF RX (dB)</td> <td>5</td> <td>5</td> </tr> <tr> <td>Flatness (dB)</td> <td>+/- 2.0</td> <td>+/- 1.5</td> </tr> </tbody> </table>				802.11a	802.11b/g	Gain TX (dB)	0	0	Output Power (dBm)	17	b: 20 g: 17	Gain RX (dB)	4	4	NF RX (dB)	5	5	Flatness (dB)	+/- 2.0	+/- 1.5	2 DC Power Inputs DC-1 = 28V Mandatory DC Power, 86 Watts DC-2= 9.8V Optional Redundant Power, 40 Watts							
	802.11a	802.11b/g																										
Gain TX (dB)	0	0																										
Output Power (dBm)	17	b: 20 g: 17																										
Gain RX (dB)	4	4																										
NF RX (dB)	5	5																										
Flatness (dB)	+/- 2.0	+/- 1.5																										
860(M/R) Module Standalone:			Physical Specifications																									
<table border="1"> <thead> <tr> <th></th> <th>802.11a</th> <th>802.11b/g</th> </tr> </thead> <tbody> <tr> <td>Insertion Loss (dB)</td> <td>3</td> <td>2</td> </tr> <tr> <td>Flatness (dB)</td> <td>+/- 1.0</td> <td>+/- 1.0</td> </tr> </tbody> </table>				802.11a	802.11b/g	Insertion Loss (dB)	3	2	Flatness (dB)	+/- 1.0	+/- 1.0	860(M/R): 242 mm x 279 mm x 38 mm (9.54 in x 10.98 in x 1.5 in) WCE: 130 mm x 120 mm x 20 mm (5.12 in x 4.73in x 0.8 in)																
	802.11a	802.11b/g																										
Insertion Loss (dB)	3	2																										
Flatness (dB)	+/- 1.0	+/- 1.0																										
Mobile Services Parameters			Weight																									
<table border="1"> <thead> <tr> <th></th> <th>Cell</th> <th></th> <th>PCS</th> </tr> </thead> <tbody> <tr> <td>Band (MHz)</td> <td>896-960</td> <td></td> <td>1710-1990</td> </tr> <tr> <td>Insertion Loss (dB)</td> <td></td> <td></td> <td></td> </tr> <tr> <td>MA-860</td> <td>1.0</td> <td></td> <td>2.5</td> </tr> <tr> <td>WCE</td> <td>1.2</td> <td></td> <td>3.5</td> </tr> <tr> <td>System</td> <td>2.2</td> <td></td> <td>6.0</td> </tr> </tbody> </table>				Cell		PCS	Band (MHz)	896-960		1710-1990	Insertion Loss (dB)				MA-860	1.0		2.5	WCE	1.2		3.5	System	2.2		6.0	860(M/R): 2.82 kg (6.2 lb) WCE: 0.80 kg (1.8 lb)	
	Cell		PCS																									
Band (MHz)	896-960		1710-1990																									
Insertion Loss (dB)																												
MA-860	1.0		2.5																									
WCE	1.2		3.5																									
System	2.2		6.0																									
RF Connections			Environmental Specifications																									
<table border="1"> <thead> <tr> <th>860(M/R)</th> <th>Cell</th> <th></th> <th>PCS</th> </tr> </thead> <tbody> <tr> <td>802.11 b/g</td> <td>(4) SMA Female, 50 ohm</td> <td></td> <td></td> </tr> <tr> <td>802.11 a</td> <td>(4) SMA Female, 50 ohm</td> <td></td> <td></td> </tr> <tr> <td>Mobile Services</td> <td>(4) SMA Female, 50 ohm</td> <td></td> <td></td> </tr> <tr> <td>Antenna Ports</td> <td>(4) N-type Female, 50 ohm</td> <td></td> <td></td> </tr> </tbody> </table>			860(M/R)	Cell		PCS	802.11 b/g	(4) SMA Female, 50 ohm			802.11 a	(4) SMA Female, 50 ohm			Mobile Services	(4) SMA Female, 50 ohm			Antenna Ports	(4) N-type Female, 50 ohm			Temperature Operating: 0°C to +50°C (32°F to 122°F) Storage: -20°C to +85°C (-4°C to 185°C) Humidity Operating: 95% (non-condensing) Storage: 95% (non-condensing)					
860(M/R)	Cell		PCS																									
802.11 b/g	(4) SMA Female, 50 ohm																											
802.11 a	(4) SMA Female, 50 ohm																											
Mobile Services	(4) SMA Female, 50 ohm																											
Antenna Ports	(4) N-type Female, 50 ohm																											
WCE			Ordering Information																									
<table border="1"> <thead> <tr> <th>Coax (860 facing)</th> <th>(1) N-type Male</th> </tr> <tr> <th>Coax (Ant facing)</th> <th>(1) N-type Female</th> </tr> </thead> </table>			Coax (860 facing)	(1) N-type Male	Coax (Ant facing)	(1) N-type Female	860M 860 WLAN Module 860R 860 WLAN Module - Redundant Power Supply Option WCE Wi-Fi Coverage Expander																					
Coax (860 facing)	(1) N-type Male																											
Coax (Ant facing)	(1) N-type Female																											
Standards and Approvals			Accessory Kits for mounting 860(M/R):																									
FCC-47, CFR 15.109, Part 15 Sections B, C, and E UL / IEC 60950 -1 UL1980 Fire Safety requirements UL2043 Fire/Plenum (WCE) CE EN 60950 CAN/CSA C22.2 No 60950			AK-860-1000 860 with MA-1000 AK-860-1200 860 with MA-1200 AK-860-MDLT 860 with ModuLite AK-860-2000 860 with MA-2000 AK-860-SA 860 stand alone AK-860-2000L 860 with MA-2000 Lite AK-860-PWR Redundant Power Supply																									

Management

The 860(M/R) can be configured and monitored through either a local RS-485 connection or a Web browser application via an RJ-45 Ethernet connection

Wiring Diagram

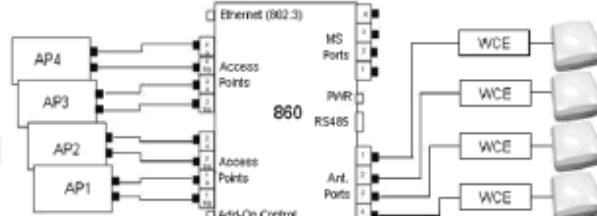

8391 Old Courthouse Road, Suite 300, Vienna, VA 22182

Tel: (800)436-9266, (703) 848-0200 TAC (600) 737-1266 Fax: (703) 848-0280

www.mobileaccess.com

4. Spurious Radiated Emission in the Restricted Band, Below 1 GHz 5GHz Transmitter 802.11b/g+802.11a Signals

4.1 **Test Specification**

9kHz-1000 MHz, F.C.C., Part 15, Subpart C

4.2 **Test Procedure**

The E.U.T. operation mode and test set-up are as described in Section 3.

See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 3.1.

The frequency range 9 kHz-1000 MHz was scanned, and the list of the highest emissions was verified and updated accordingly.

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 9 kHz-30 MHz, the loop antenna was rotated on its vertical axis, The antenna height (center of loop) was 1 meter.

In the frequency range 30-1000 MHz, the readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

Verification of the E.U.T emissions was based on the following methods:

Turning the E.U.T on and off.

Using a frequency span less than 10 MHz.

Observation of the signal level during turntable rotation. Background noise is not affected by the rotation of the E.U.T.

The E.U.T. was tested at the operating frequencies of, 5180, 5200, 5240, 5745, 5765, and 5805 MHz using the following modulations: 64QAM, and BPSK.

4.3 **Test Data**

JUDGEMENT: Passed by 0.3 dB.

The margin between the emission level and the specification limit is 0.3 dB in the worst case at the frequency of 396.03 MHz, horizontal polarization.

The EUT met the requirements of the F.C.C. Part 15, Subpart C, specification.

The results for all three operating frequencies and modulations were the same.

TEST PERSONNEL:

Tester Signature:  Date: 02.03.08

Typed/Printed Name: A. Sharabi

Radiated Emission

E.U.T Description WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points
 Type 860M With WCE
 Serial Number: 1. 860M: 73903D
 2. WCE: 739038

Specification: FCC Part 15, Subpart C

Antenna Polarization: Horizontal Frequency range: 30 MHz to 1000 MHz
 Antenna: 3 meters distance Detectors: Peak, Quasi-peak

Signal Number	Frequency (MHz)	Peak dBuV/m	QP dBuV/m	QP Delta L 1 (dB)	Avg dBuV/m	Av Delta L 2 (dB)	Corr (dB)
1	66.248650	26.1	23.2	-16.8			-2.5
2	250.004650	44.8	41.8	-4.2			20.3
3	264.010850	43.5	39.8	-6.2			21.0
4	264.017200	43.7	40.3	-5.7			21.0
5	396.012500	48.1	45.7	-0.3			18.9
6	499.896550	54.5	27.6	-18.4			20.4

Figure 2. Radiated Emission. Antenna Polarization: HORIZONTAL. Detectors: Peak, Quasi-peak

Note: QP Delta refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.


Radiated Emission

E.U.T Description	WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points
Type	860M With WCE
Serial Number:	1. 860M: 73903D 2. WCE: 739038

Specification: FCC Part 15, Subpart C

Antenna Polarization: Horizontal
Antenna: 3 meters distance

Frequency range: 30 MHz to 1000 MHz
Detectors: Peak, Quasi-peak

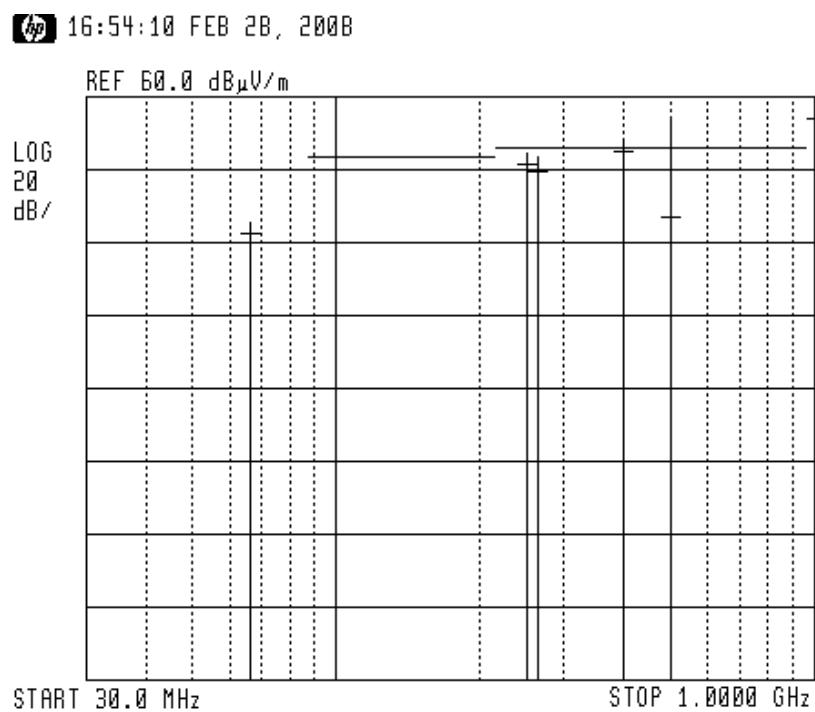

**Figure 3. Radiated Emission. Antenna Polarization: HORIZONTAL
Detectors: Peak, Quasi-peak**

Note:

1. Horizontal axis shows logarithmic frequency scale.
2. The vertical axis shows amplitude (in dB μ V/m).
3. Peak detection is designated by the top of each vertical line.
4. Quasi-peak detection is designated by the first dash mark (from the top) of each vertical line.

Radiated Emission

E.U.T Description WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points
 Type 860M With WCE
 Serial Number: 1. 860M: 73903D
 2. WCE: 739038

Specification: FCC Part 15, Subpart C

Antenna Polarization: Vertical
 Antenna: 3 meters distance

Frequency range: 30 MHz to 1000 MHz
 Detectors: Peak, Quasi-peak

Signal Number	Frequency (MHz)	Peak dBuV/m	QP dBuV/m	QP Delta L 1 (dB)	Avg dBuV/m	Av Delta L 2 (dB)	Corr (dB)
1	132.000055	31.4	28.7	-14.8			6.1
2	232.600000	42.7	38.2	-7.8			18.8
3	264.000000	42.5	39.0	-6.9			21.0
4	396.019850	47.5	43.3	-2.7			18.9
5	498.360850	50.4	35.5	-10.5			20.4
6	500.012100	49.0	40.7	-5.3			20.4

Figure 4. Radiated Emission. Antenna Polarization: VERTICAL.
Detectors: Peak, Quasi-peak

Note: QP Delta refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.


Radiated Emission

E.U.T Description	WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points
Type	860M With WCE
Serial Number:	1. 860M: 73903D 2. WCE: 739038

Specification: FCC Part 15, Subpart C

Antenna Polarization: Vertical
Antenna: 3 meters distance

Frequency range: 30 MHz to 1000 MHz
Detectors: Peak, Quasi-peak

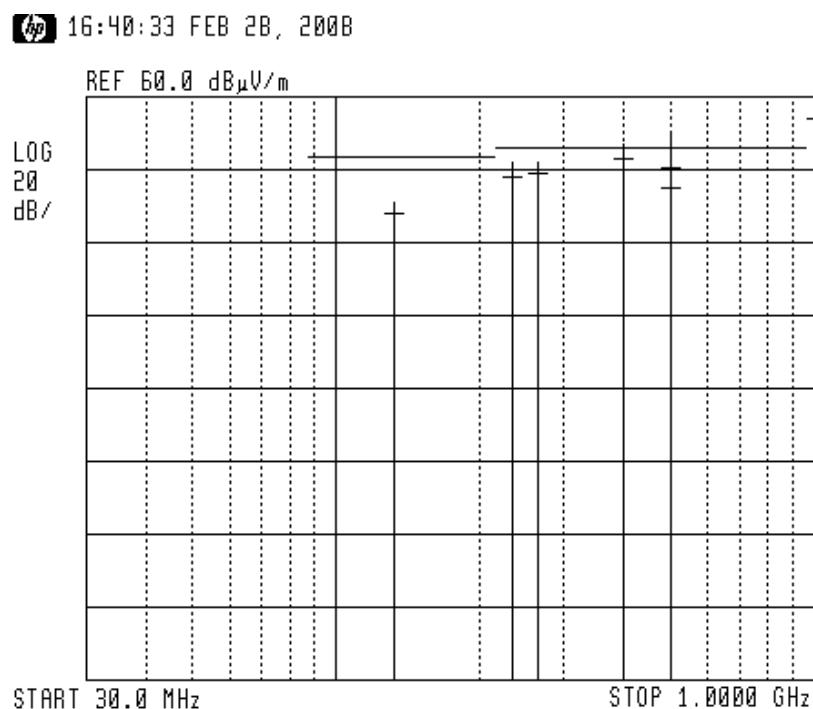

**Figure 5. Radiated Emission. Antenna Polarization: VERTICAL.
Detectors: Peak, Quasi-peak**

Note:

1. Horizontal axis shows logarithmic frequency scale.
2. The vertical axis shows amplitude (in dB μ V/m).
3. Peak detection is designated by the top of each vertical line.
4. Quasi-peak detection is designated by the first dash mark (from the top) of each vertical line.

4.4 ***Test Instrumentation Used, Radiated Measurements***

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3411A00102	November 12, 2007	1 year
RF Section	HP	85420E	3427A00103	November 12, 2007	1 year
Antenna Bioconical	ARA	BCD 235/B	1041	March 22, 2007	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	November 22, 2007	1 year
Active Loop Antenna	EMCO	6502	9506-2950	October 15, 2007	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A



4.5 Field Strength Calculation

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$[\text{dB}\mu\text{v}/\text{m}] \text{ FS} = \text{RA} + \text{AF} + \text{CF}$$

FS: Field Strength [dB μ v/m]
RA: Receiver Amplitude [dB μ v]
AF: Receiving Antenna Correction Factor [dB/m]
CF: Cable Attenuation Factor [dB]

No external pre-amplifiers are used.

5. Spurious Radiated Emission in the Restricted Band, Above 1 GHz 5GHz Transmitter 802.11b/g+802.11a Signals

5.1 Radiated Emission Above 1 GHz

The E.U.T operation mode and test set-up are as described in Section 3.

See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 3.1.

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.

In the frequency range 1-2.9 GHz, a computerized EMI receiver complying to CISPR 16 requirements was used.

In the frequency range 2.9-40.0 GHz, a spectrum analyzer including a low noise amplifier was used. During average measurements, the IF bandwidth was 1 MHz and the video bandwidth was 100Hz. During peak measurements, the IF bandwidth was 1 MHz and the video bandwidth was 3 MHz.

The test distance was 3 meters.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

Verification of the E.U.T emissions was based on the following methods: turning the E.U.T on and off; using a frequency span less than 10 MHz; observation of the signal level during turntable rotation. (Background noise is not affected by the rotation of the E.U.T.)

The E.U.T. was tested at the operating frequencies of, 5180, 5200, 5240, 5745, 5765, and 5805 MHz using the following modulations: 64QAM, and BPSK.

5.2 **Test Data**

JUDGEMENT: Passed by 8.9 dB

For the operation frequency of 5180 MHz, the margin between the emission level and the specification limit is 10.0 dB in the worst case at the frequency of 10360.00 MHz, horizontal and vertical polarizations.

For the operation frequency of 5200 MHz, the margin between the emission level and the specification limit is 11.0 dB in the worst case at the frequency of 10400.00 MHz, horizontal and vertical polarizations.

For the operation frequency of 5240 MHz, the margin between the emission level and the specification limit is 10.0 dB in the worst case at the frequency of 10480.00 MHz, horizontal and vertical polarizations.

For the operation frequency of 5745 MHz, the margin between the emission level and the specification limit is 11.0 dB in the worst case at the frequency of 11490.00 MHz, vertical polarization.

For the operation frequency of 5765 MHz, the margin between the emission level and the specification limit is 9.0 dB in the worst case at the frequency of 11530.00 MHz, horizontal polarization.

For the operation frequency of 5805 MHz, the margin between the emission level and the specification limit is 8.9 dB in the worst case at the frequency of 11610.00 MHz, horizontal polarization.

The results for all modulations were the same.

The EUT met the requirements of the F.C.C. Part 15, Subpart C, specification.

TEST PERSONNEL:

Tester Signature:  Date: 02.03.05

Typed/Printed Name: E. Pitt



Radiated Emission Above 1 GHz

E.U.T Description	WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points
Type	860M With WCE
Serial Number:	1. 860M: 73903D 2. WCE: 739038

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 40.0 GHz
Test Distance: 3 meters Detector: Peak
Operation Frequency: 5180 MHz

Freq.	Polarity	Peak Amp	Peak Specification	Peak Margin
(MHz)	(H/V)	(dB μ V/m)	(dB μ V/m)	(dB)
10360.00	H	61.9*	74.0	-12.1
10360.00	V	62.2*	74.0	-11.8

Figure 6. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL. Detector: Peak

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Amp” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

Radiated Emission Above 1 GHz

E.U.T Description WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points
 Type 860M With WCE
 Serial Number: 1. 860M: 73903D
 2. WCE: 739038

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 40.0 GHz
 Test Distance: 3 meters Detector: Average
 Operation Frequency: 5180 MHz

Freq.	Polarity	Average Amp	Average Specification	Peak Margin
(MHz)	(H/V)	(dB μ V/m)	(dB μ V/m)	(dB)
10360.00	H	44.0*	54.0	-10.0
10360.00	V	44.0*	54.0	-10.0

**Figure 7. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.
Detector: Average**

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Amp” includes correction factor.

* Correction Factor = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

Radiated Emission Above 1 GHz

E.U.T Description	WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points
Type	860M With WCE
Serial Number:	1. 860M: 73903D 2. WCE: 739038

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 40.0 GHz
 Test Distance: 3 meters Detector: Peak
 Operation Frequency: 5200 MHz

Freq.	Polarity	Peak Amp	Peak. Specification	Peak. Margin
(MHz)	(H/V)	(dB μ V/m)	(dB μ V/m)	(dB)
10400.00	H	52.0*	74.0	-22.0
10400.00	V	52.0*	74.0	-22.0

Figure 8. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL. Detector: Peak

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Amp” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

Radiated Emission Above 1 GHz

E.U.T Description WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points
 Type 860M With WCE
 Serial Number: 1. 860M: 73903D
 2. WCE: 739038

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 40.0 GHz
 Test Distance: 3 meters Detector: Average
 Operation Frequency: 5200 MHz

Freq.	Polarity	Average Amp	Average Specification	Peak Margin
(MHz)	(H/V)	(dB μ V/m)	(dB μ V/m)	(dB)
10400.00	H	43.0*	54.0	-11.0
10400.00	V	43.0*	54.0	-11.0

**Figure 9. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.
Detector: Average**

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Amp” includes correction factor.

* Correction Factor = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

Radiated Emission Above 1 GHz

E.U.T Description	WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points
Type	860M With WCE
Serial Number:	1. 860M: 73903D 2. WCE: 739038

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 40.0 GHz
 Test Distance: 3 meters Detector: Peak
 Operation Frequency: 5240 MHz

Freq.	Polarity	Peak Amp	Peak. Specification	Peak. Margin
(MHz)	(H/V)	(dB μ V/m)	(dB μ V/m)	(dB)
10480.00	H	52.0*	74.0	-22.0
10480.00	V	52.0*	74.0	-22.0

Figure 10. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL. Detector: Peak

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Amp” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

Radiated Emission Above 1 GHz

E.U.T Description WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points
 Type 860M With WCE
 Serial Number: 1. 860M: 73903D
 2. WCE: 739038

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 40.0 GHz
 Test Distance: 3 meters Detector: Average
 Operation Frequency: 5240 MHz

Freq.	Polarity	Average Amp	Average Specification	Peak Margin
(MHz)	(H/V)	(dB μ V/m)	(dB μ V/m)	(dB)
10480.00	H	44.0*	54.0	-10.0
10480.00	V	44.0*	54.0	-10.0

**Figure 11. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.
Detector: Average**

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Amp” includes correction factor.

* Correction Factor = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

Radiated Emission Above 1 GHz

E.U.T Description	WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points
Type	860M With WCE
Serial Number:	1. 860M: 73903D 2. WCE: 739038

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 40.0 GHz
 Test Distance: 3 meters Detector: Peak
 Operation Frequency: 5745 MHz

Freq. (MHz)	Polarity (H/V)	Peak Amp (dB μ V/m)	Peak. Specification (dB μ V/m)	Peak. Margin (dB)
11490.00	H	55.1*	74.0	-18.9
11490.00	V	55.1*	74.0	-18.9

Figure 12. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL. Detector: Peak

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Amp” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

Radiated Emission Above 1 GHz

E.U.T Description WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points
 Type 860M With WCE
 Serial Number: 1. 860M: 73903D
 2. WCE: 739038

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 40.0 GHz
 Test Distance: 3 meters Detector: Average
 Operation Frequency: 5745 MHz

Freq.	Polarity	Average Amp	Average Specification	Peak Margin
(MHz)	(H/V)	(dB μ V/m)	(dB μ V/m)	(dB)
11490.00	H	42.2*	54.0	-11.8
11490.00	V	43.0*	54.0	-11.0

**Figure 13. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.
Detector: Average**

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Amp” includes correction factor.

* Correction Factor = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

Radiated Emission Above 1 GHz

E.U.T Description	WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points
Type	860M With WCE
Serial Number:	1. 860M: 73903D 2. WCE: 739038

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical	Frequency range: 1.0 GHz to 40.0 GHz
Test Distance: 3 meters	Detector: Peak
Operation Frequency: 5765 MHz	

Freq. (MHz)	Polarity (H/V)	Peak Amp (dB μ V/m)	Peak. Specification (dB μ V/m)	Peak. Margin (dB)
11530.00	H	55.3*	74.0	-18.7
11530.00	V	55.3*	74.0	-18.7

Figure 14. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL. Detector: Peak

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Amp” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

Radiated Emission Above 1 GHz

E.U.T Description WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points
 Type 860M With WCE
 Serial Number: 1. 860M: 73903D
 2. WCE: 739038

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 40.0 GHz
 Test Distance: 3 meters Detector: Average
 Operation Frequency: 5765 MHz

Freq.	Polarity	Average Amp	Average Specification	Peak Margin
(MHz)	(H/V)	(dB μ V/m)	(dB μ V/m)	(dB)
11530.00	H	45.0*	54.0	-9.0
11530.00	V	44.0*	54.0	-10.0

**Figure 15. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.
Detector: Average**

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Amp” includes correction factor.

* Correction Factor = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

Radiated Emission Above 1 GHz

E.U.T Description	WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points
Type	860M With WCE
Serial Number:	1. 860M: 73903D 2. WCE: 739038

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 40.0 GHz
 Test Distance: 3 meters Detector: Peak
 Operation Frequency: 5805 MHz

Freq.	Polarity	Peak Amp	Peak. Specification	Peak. Margin
(MHz)	(H/V)	(dB μ V/m)	(dB μ V/m)	(dB)
11610.00	H	56.4*	74.0	-17.6
11610.00	V	56.4*	74.0	-17.6

Figure 16. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL. Detector: Peak

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Amp” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

Radiated Emission Above 1 GHz

E.U.T Description WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points
 Type 860M With WCE
 Serial Number: 1. 860M: 73903D
 2. WCE: 739038

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 40.0 GHz
 Test Distance: 3 meters Detector: Average
 Operation Frequency: 5805 MHz

Freq.	Polarity	Average Amp	Average Specification	Peak Margin
(MHz)	(H/V)	(dB μ V/m)	(dB μ V/m)	(dB)
11610.00	H	45.1*	54.0	-8.9
11610.00	V	44.7*	54.0	-9.3

**Figure 17. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.
Detector: Average**

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Amp” includes correction factor.

* Correction Factor = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

5.3 Test Instrumentation Used, Radiated Measurements Above 1 GHz

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
Receiver	HP	85422E	3411A00102	November 12, 2007	1 year
RF Section	HP	85420E	3427A00103	November 12, 2007	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A
Antenna-Log Periodic	A.H.System	SAS-200/511	253	February 4, 2007	2 years
Double Ridged Waveguide Horn Antenna	EMCO	3115	29845	March 15, 2006	2 years
Horn Antenna	ARA	SWH-28	1008	December 8, 2006	2 year
Horn Antenna	Narda	V637	0410	December 8, 2006	2 year
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS-0411N313	013	November 2, 2007	1 year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	January 9, 2008	1 year
Low Noise Amplifier	MK Milliwave	MKT6-3000 400-30-13P	399	January 9, 2008	1 year
Spectrum Analyzer	HP	8593EM	3536A00120	February 26, 2008	1 year
Spectrum Analyzer	HP	8546E	3442A00275	November 14, 2007	1 year
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

6. 26 dB Bandwidth 5 GHz Transmitter 802.11b/g+802.11a Signals

6.1 *Test procedure*

The E.U.T. was set to the applicable test frequency. The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator (20 dB) and appropriate coaxial cable (cable loss = 1 dB). The spectrum analyzer was set to 300 kHz resolution BW. The spectrum bandwidth of the E.U.T. was measured and recorded.

The E.U.T. was tested at 5180, 5200, 5240, 5745, 5765, and 5805 MHz with the following modulations: 64QAM (54Mbit/sec) and BPSK (6Mbit/sec).

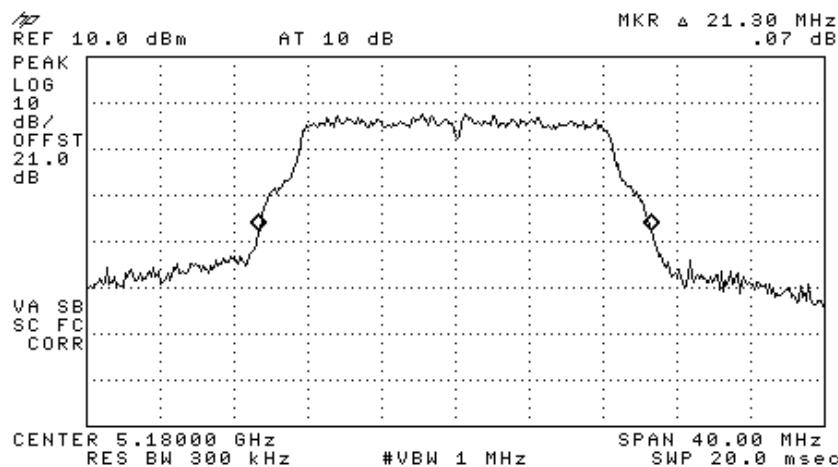


Figure 18 —5180 MHz 64QAM

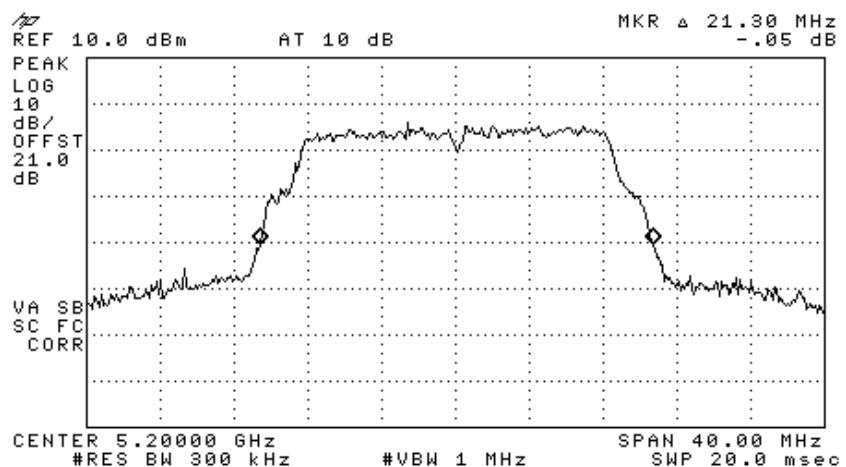


Figure 19 —5200 MHZ 64QAM

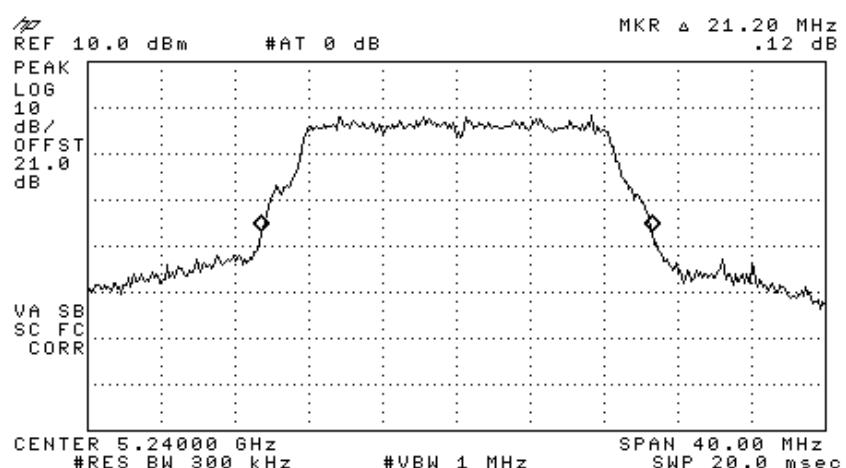


Figure 20 —5240 MHZ 64QAM

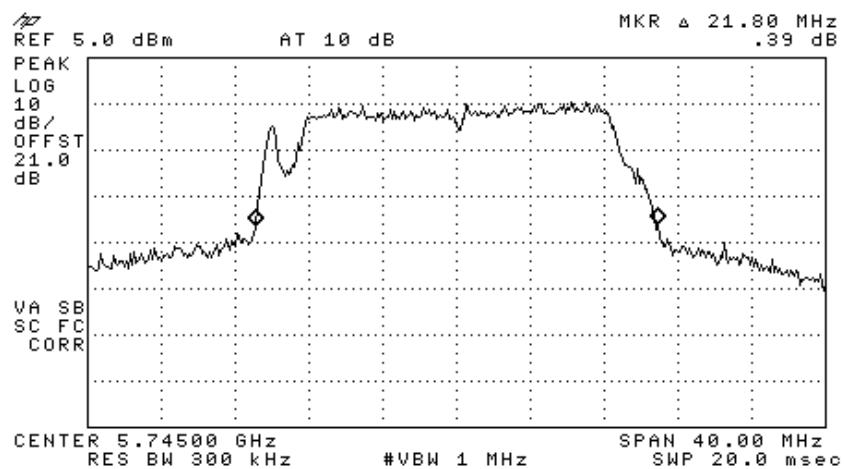


Figure 21 —5745 MHz 64QAM

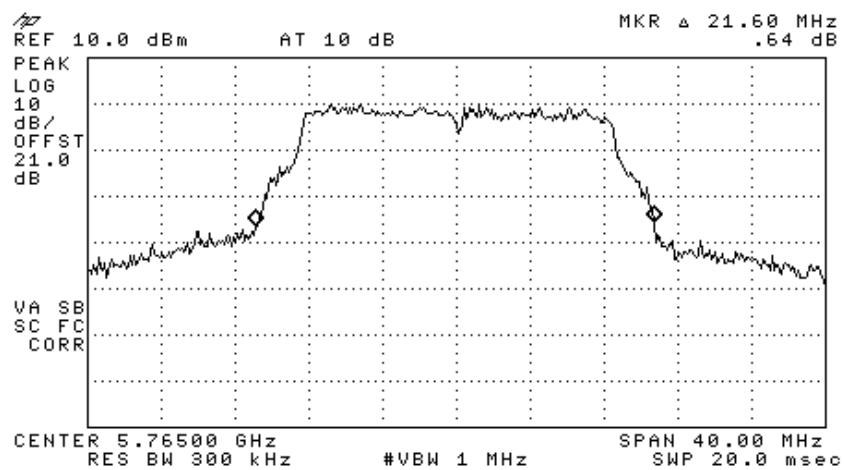


Figure 22 —5765 MHz 64QAM

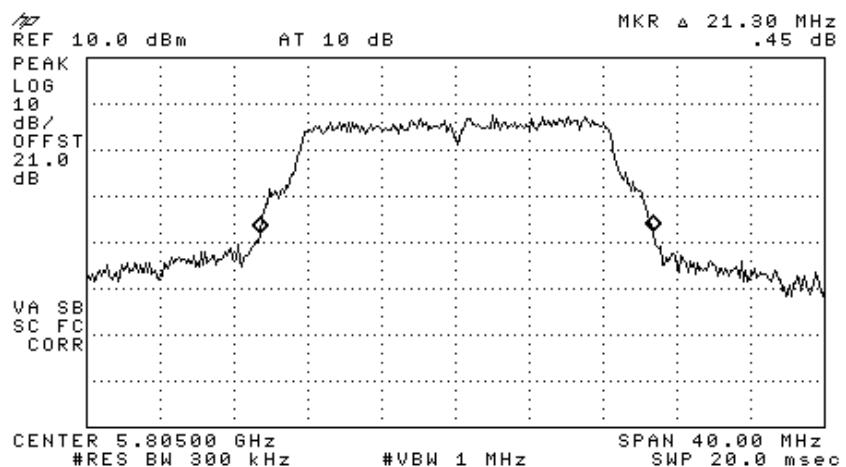


Figure 23 —5805 MHZ 64QAM

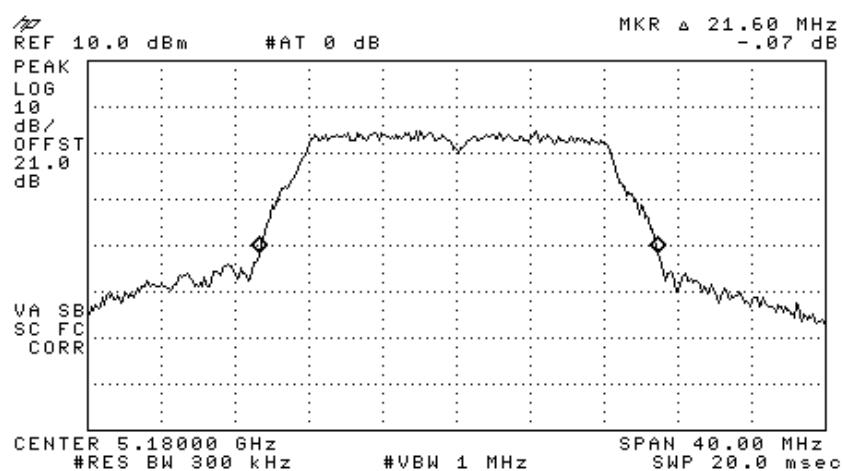


Figure 24 —5180 MHz BPSK

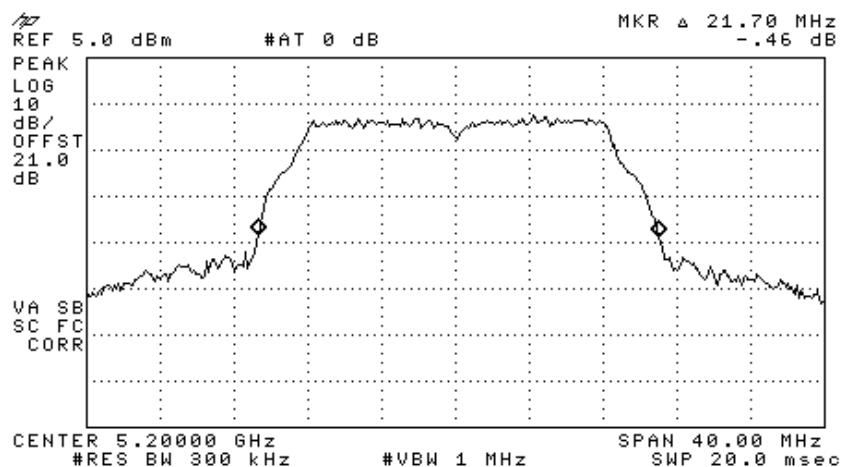


Figure 25 —5200 MHZ BPSK

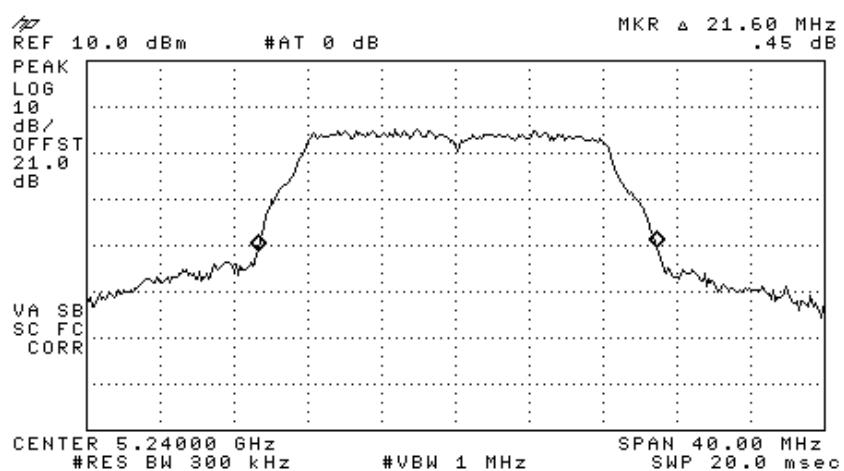


Figure 26 —5240 MHZ BPSK

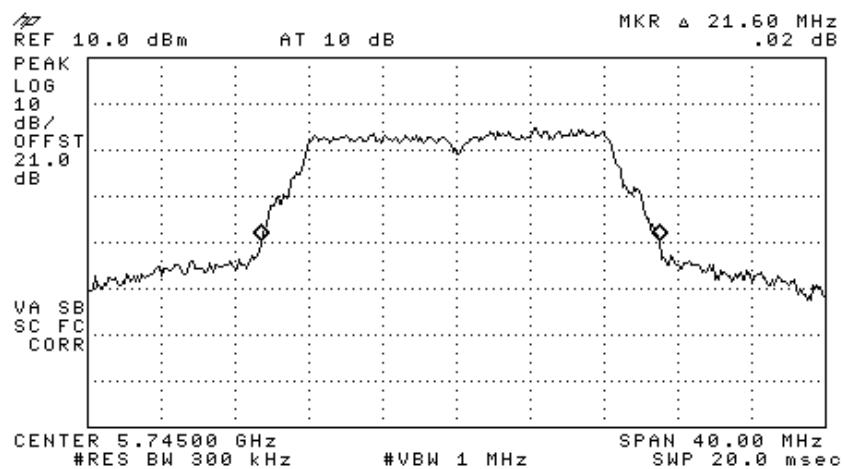


Figure 27 —5745 MHz BPSK

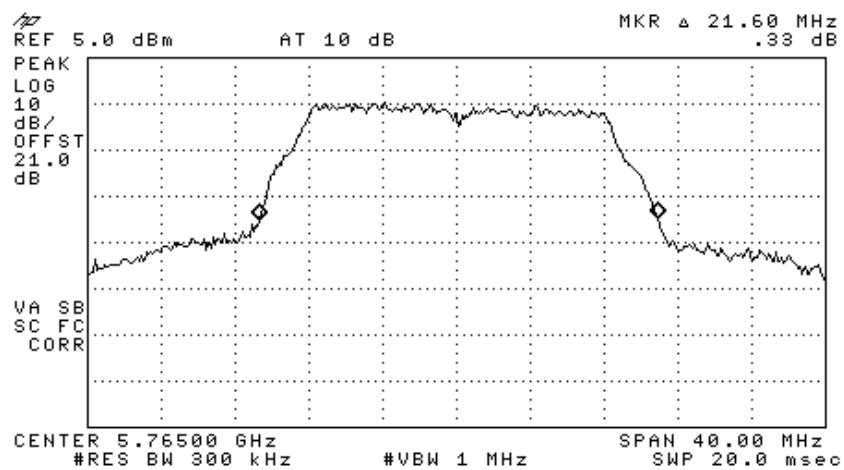


Figure 28 —5765 MHz BPSK

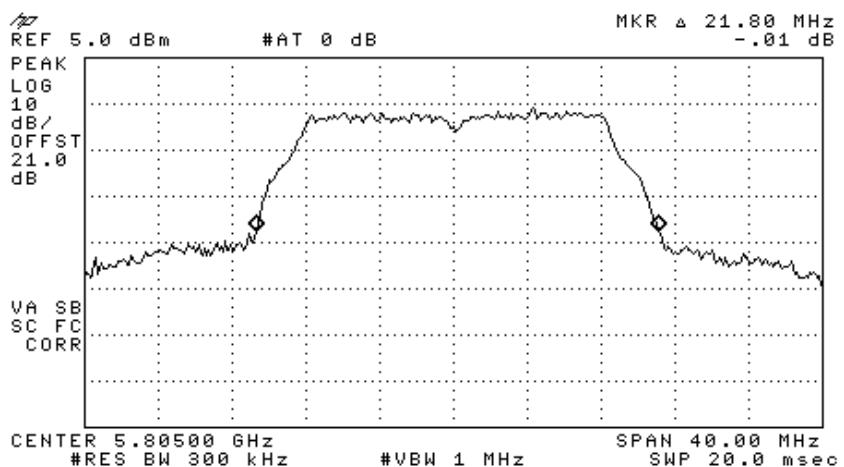


Figure 29 —5805 MHZ BPSK

Operation Frequency (MHz)	Modulation	26 dB Bandwidth (dBm)
5180	64QAM	21.30
	BPSK	21.60
5200	64QAM	21.30
	BPSK	21.70
5240	64QAM	21.20
	BPSK	21.60
5745	64QAM	21.00
	BPSK	21.60
5765	64QAM	21.60
	BPSK	21.60
5805	64QAM	21.30
	BPSK	21.80

TEST PERSONNEL:

Tester Signature: Pitt

Date: 28.02.08

Typed/Printed Name: E. Pitt

6.2 **Test Equipment Used.**

26 dB Minimum Bandwidth

Instrument	Manufacturer	Model	Serial/Part Number	Calibration	
				Last Calibr.	Period
Spectrum Analyzer	HP	8592L	3826A01204	February 22, 2007	1 year
Attenuator	Jyebao	-	FAT-AM5AF5G6G2W20	May 9, 2007	1 year
Cable	Rhophase	KPS-5000-KPS	A1674	February 8, 2008	1 year
Cable	Rhophase	KPS-1501-1000	A1675	February 8, 2008	1 year

Figure 30 Test Equipment Used

7. Maximum Conducted Output Power 5 GHz Transmitter 802.11b/g+802.11a Signals

7.1 *Test procedure*

The E.U.T. antenna terminal was connected to the Spectrum Analyzer through an external attenuator (20 dB) and an appropriate coaxial cable (Cable Loss = 1 dB). The Spectrum Analyzer was set to 1.0 MHz resolution BW. Sample detector and maximum hold were used.

The E.U.T. was tested at 5180, 5200, 5240, 5745, 5765, and 5805 MHz with the following modulations: 64QAM (54Mbit/sec) and BPSK (6Mbit/sec).

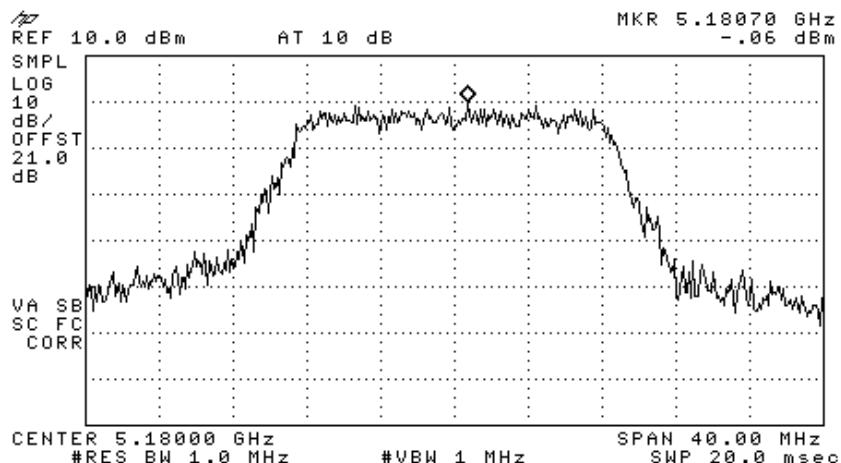


Figure 31 5180 MHz 64QAM

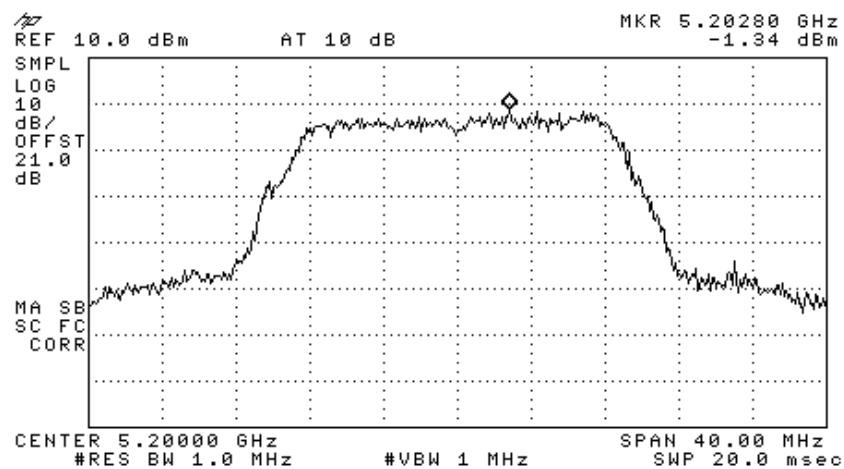


Figure 32 5200 MHz 64QAM

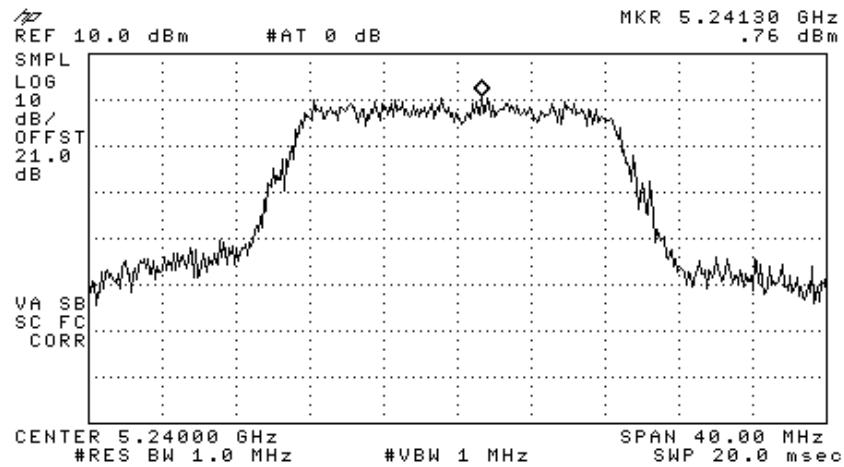


Figure 33 5240 MHz 64QAM

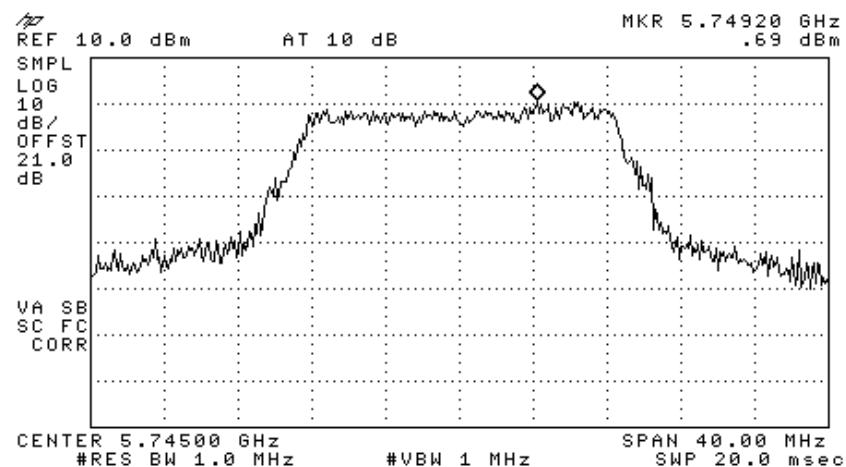


Figure 34 5745 MHz 64QAM

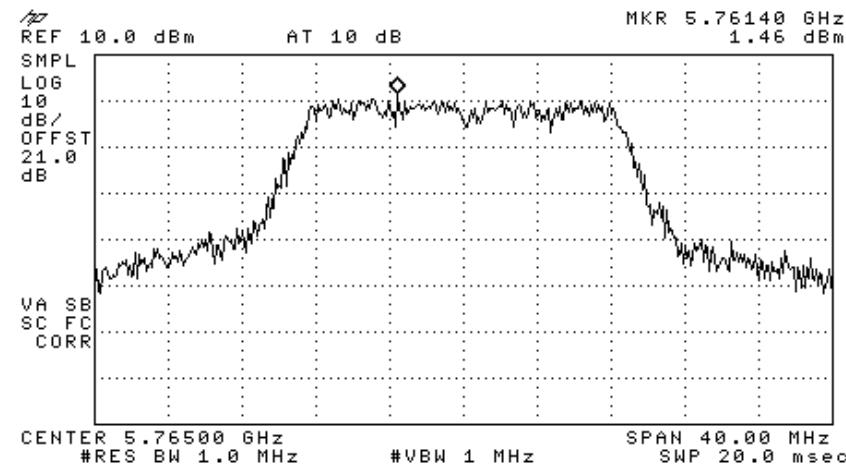


Figure 35 5765 MHz 64QAM

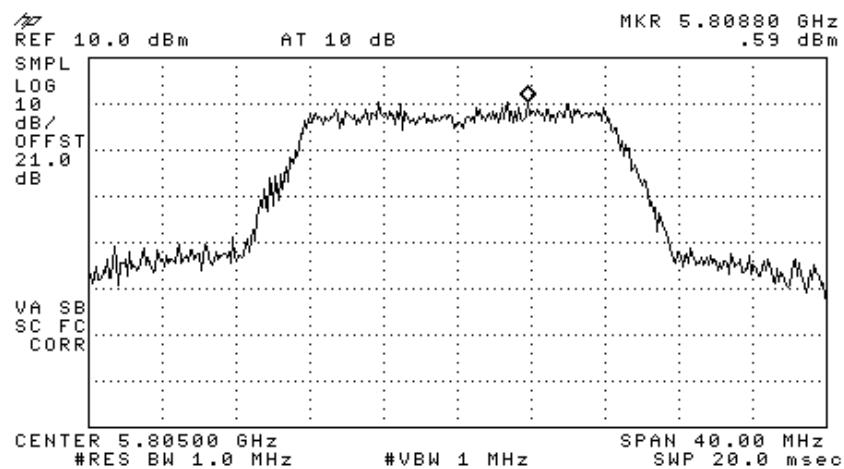


Figure 36 5805 MHz 64QAM

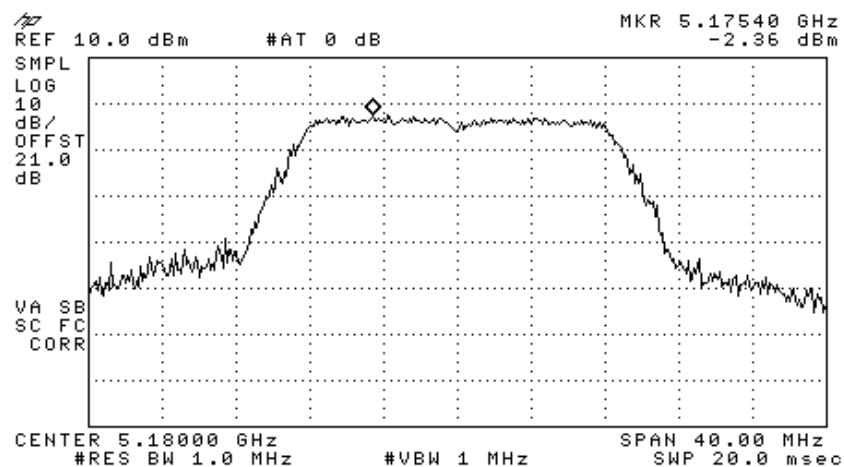


Figure 37 5180 MHz BPSK

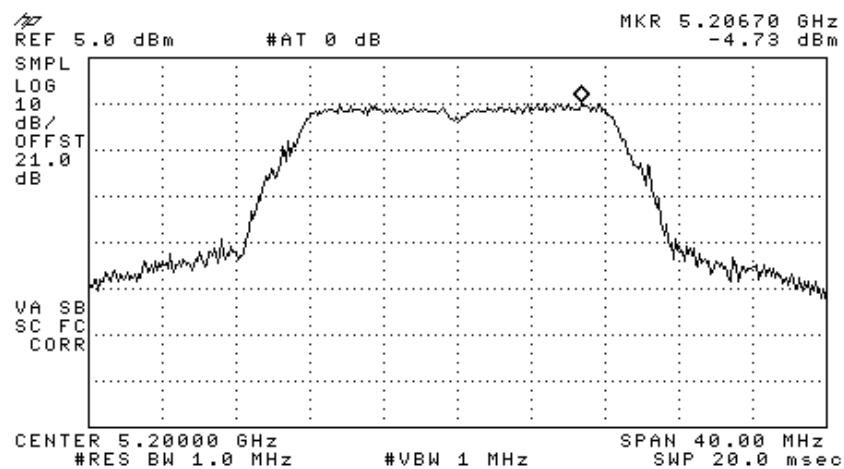


Figure 38 5200 MHz BPSK

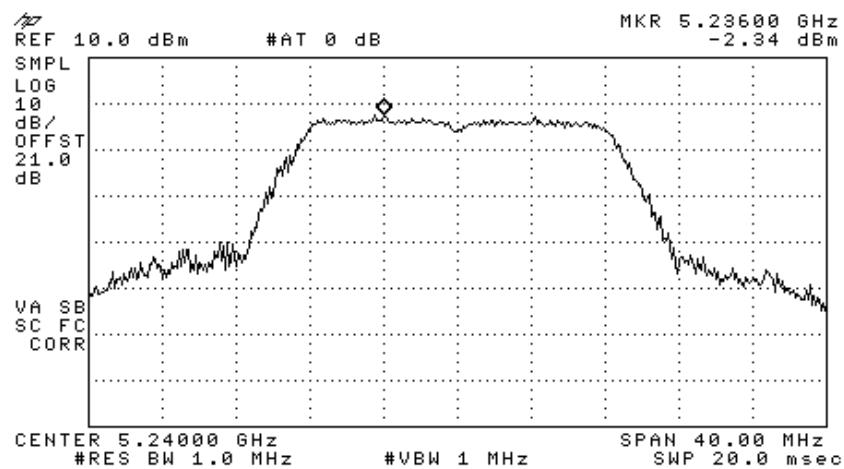


Figure 39 5240 MHz BPSK

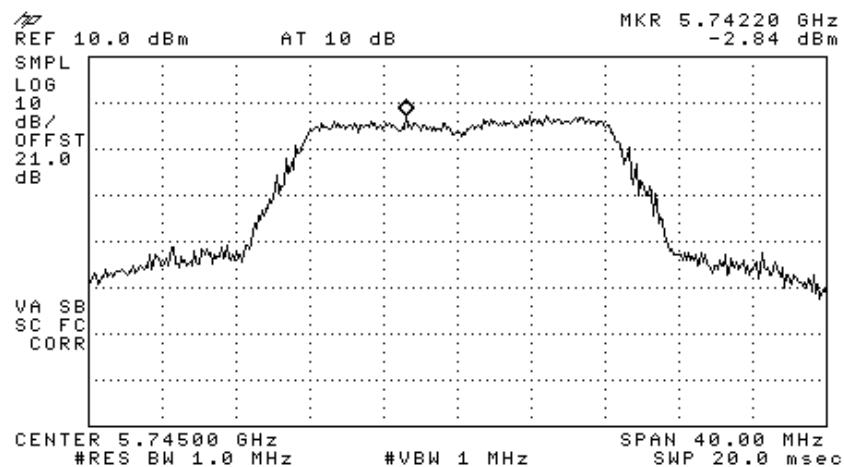


Figure 40 5745 MHz BPSK

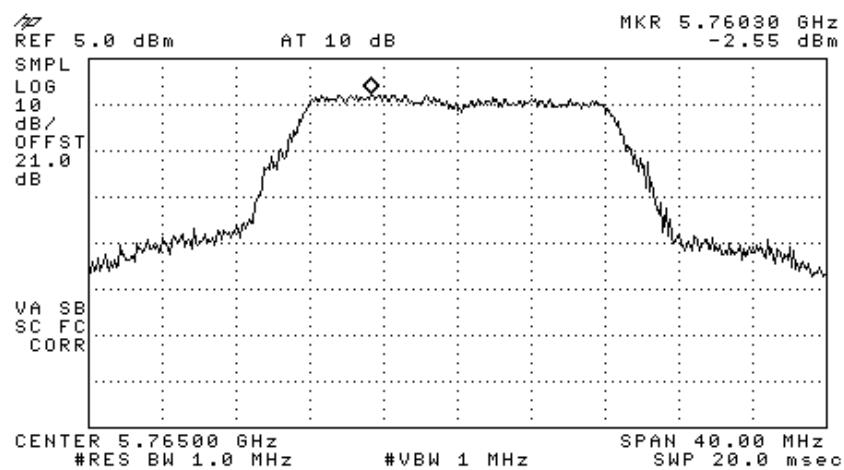


Figure 41 5765 MHz BPSK

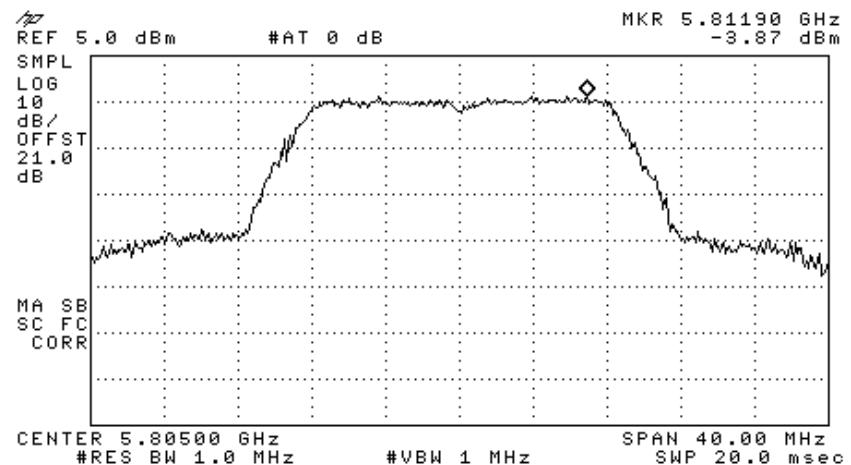


Figure 42 5805 MHz BPSK

7.2 Results table

E.U.T. Description: WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points

Model No.: 860M With WCE

Serial Number: 1. 860M: 73903D 2. WCE: 739038

Specification: F.C.C. Part 15, Subpart E

Operation Frequency (MHz)	Modulation	Power (dBm)	Specification (dBm)	Margin (dB)
5180	64QAM	13.22	16.0	-2.78
	BPSK	11.0	16.0	-5.00
5200	64QAM	11.94	16.0	-4.06
	BPSK	8.63	16.0	-7.37
5240	64QAM	14.0	16.0	-2.00
	BPSK	11.0	16.0	-5.00
5745	64QAM	14.07	29.0	-14.93
	BPSK	10.5	29.0	-18.50
5765	64QAM	14.8	29.0	-14.20
	BPSK	10.79	29.0	-18.21
5805	64QAM	13.87	29.0	-15.13
	BPSK	9.51	29.0	-19.49

Figure 43 Maximum Peak Power Output

Note: Antenna Gain is 7 dBi

Peak Output Power = Reading + $10\log_{10} EBW$

For 5.18; 5.20, 5.24 GHz Peak Output Power Limit = $4 + 10\log_{10} EBW - (\text{Antenna Gain} - 6)$ or 16 whichever is less.

For 5.745; 5.765, 5.805 GHz Peak Output Power Limit = $17 + 10\log_{10} EBW - (\text{Antenna Gain} - 6)$ or 29 whichever is less.



JUDGEMENT: Passed by 2.00 dB

TEST PERSONNEL:

Tester Signature: *Pitt* Date: 28.02.08
Typed/Printed Name: E. Pitt

7.3 *Test Equipment Used.*

Peak Power Output

Instrument	Manufacturer	Model	Serial/Part Number	Calibration	
				Last Calibr.	Period
Spectrum Analyzer	HP	8592L	3826A01204	February 22, 2007	1 year
Attenuator	Jyebao	-	FAT-AM5AF5G6G2W20	May 9, 2007	1 year
Cable	Rhophase	KPS-5000-KPS	A1674	February 8, 2008	1 year

Figure 44 Test Equipment Used

8. Peak Power Spectral Density 5GHz Transmitter 802.11b/g+802.11a Signals

[In accordance with section 15.407(a)]

8.1 Test procedure

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator (20dB) and an appropriate coaxial cable (Cable Loss = 1 dB). The spectrum analyzer was set to 1 MHz resolution BW. and 1 MHz video BW. The spectrum peaks were located at 5180, 5200, 5240, 5745, 5765, and 5805 MHz with the following modulations: 64QAM (54Mbit/sec) and BPSK (6Mbit/sec).

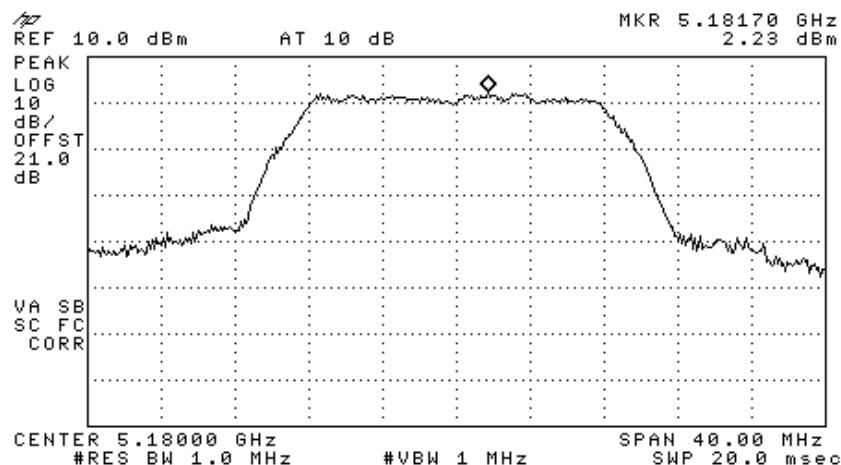


Figure 45 — 5180 MHz 64QAM

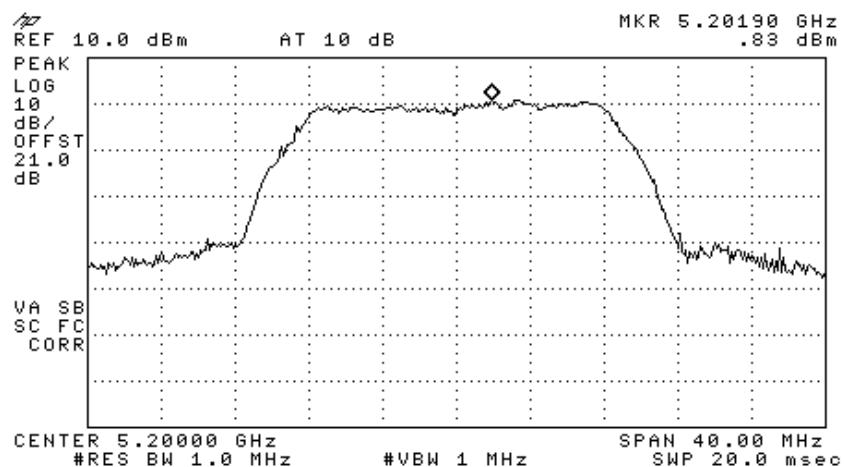


Figure 46 —5200 MHz 64QAM

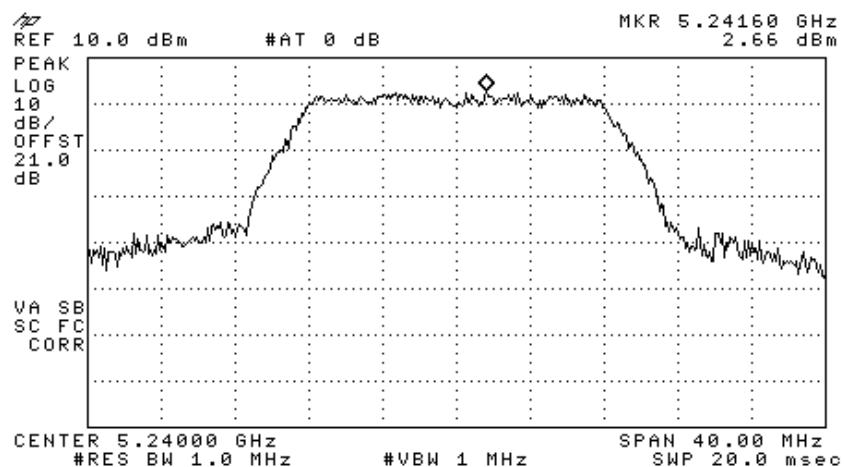


Figure 47 —5240 MHz 64QAM

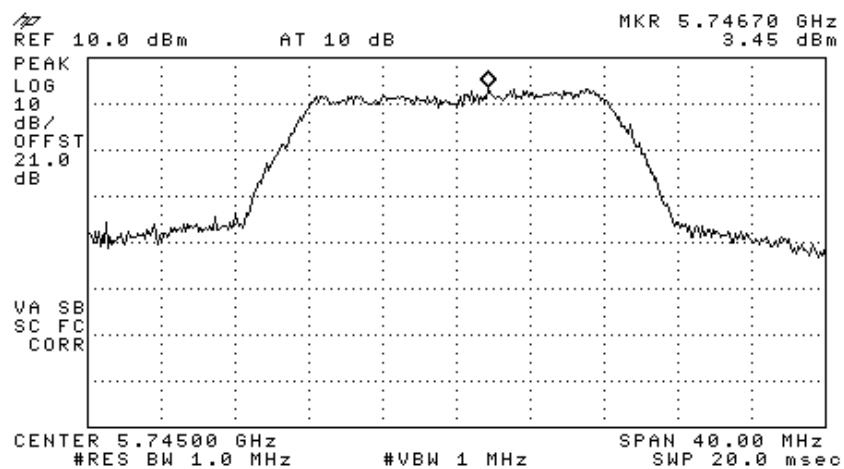


Figure 48 —5745 MHz 64QAM

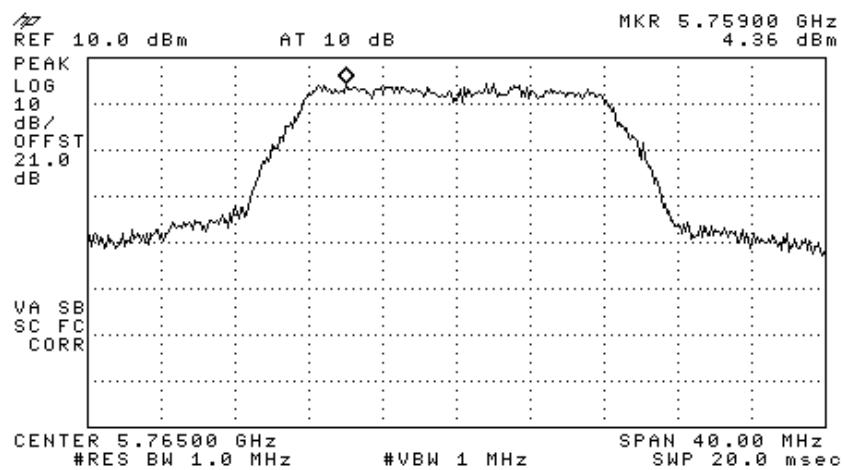


Figure 49 —5765 MHz 64QAM

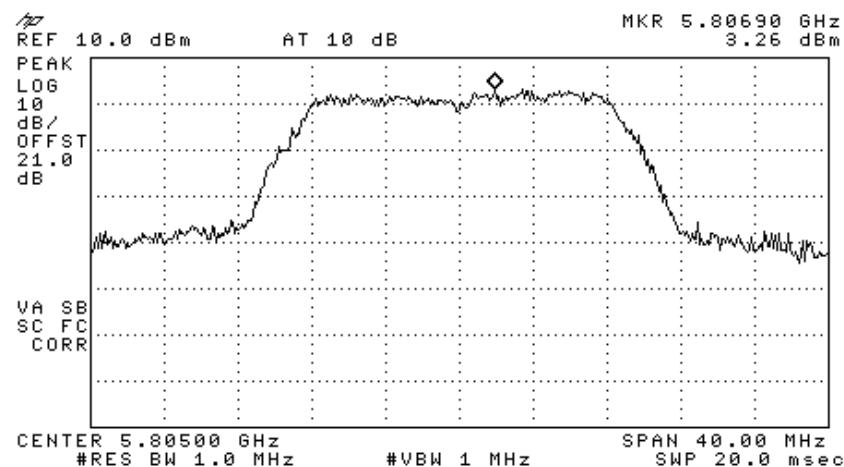


Figure 50 —5805 MHz 64QAM

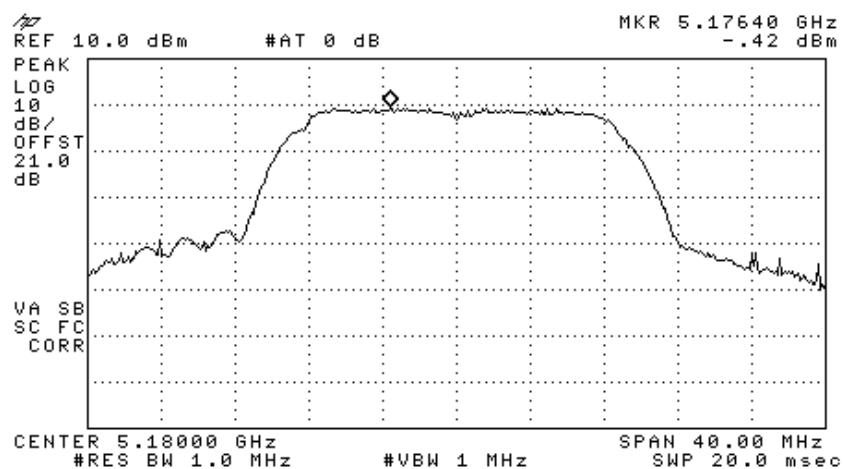


Figure 51 —5180 MHz BPSK

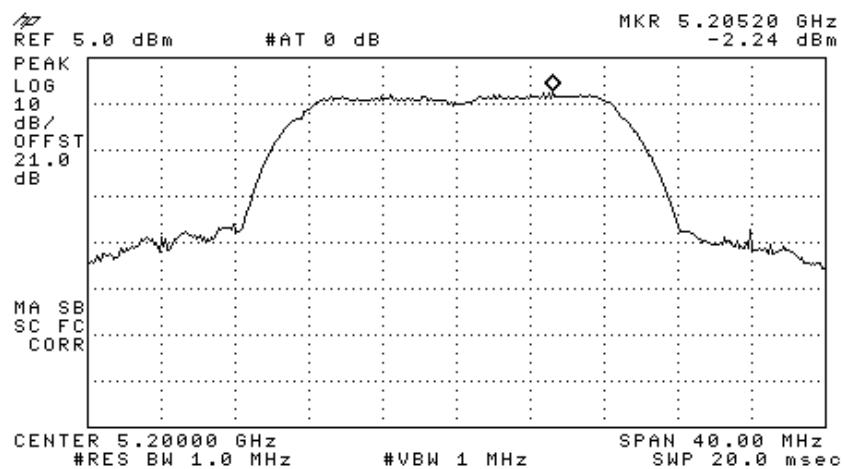


Figure 52 —5200 MHz BPSK

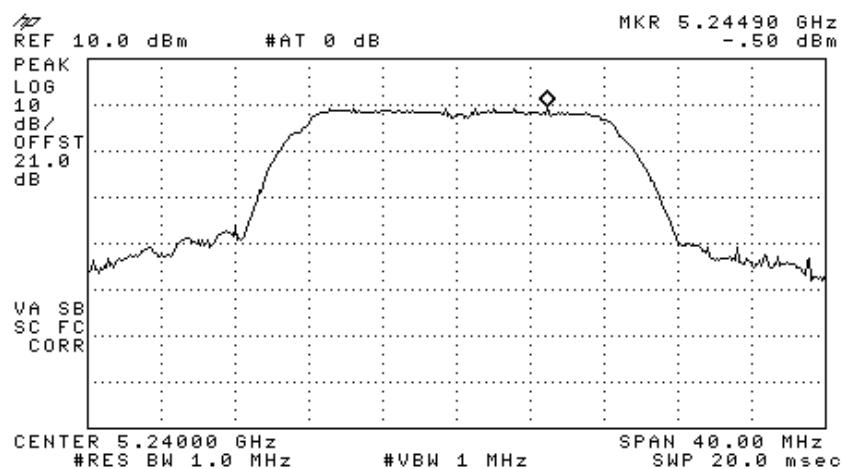


Figure 53 —5240 MHz BPSK

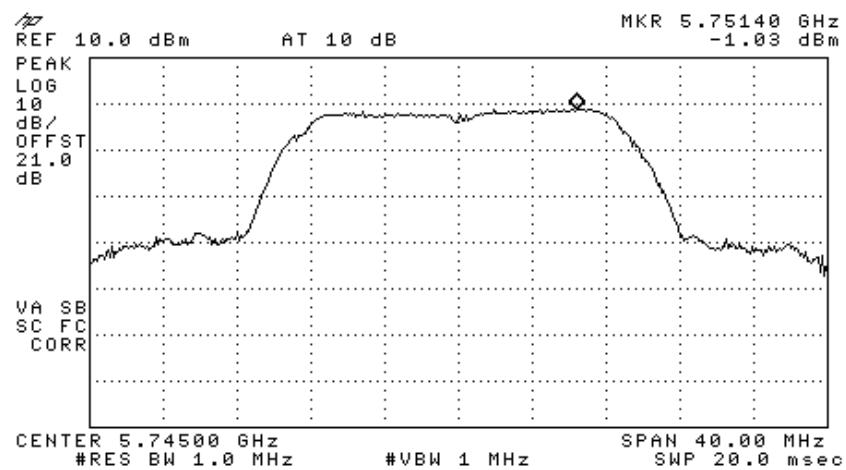


Figure 54 —5745 MHz BPSK

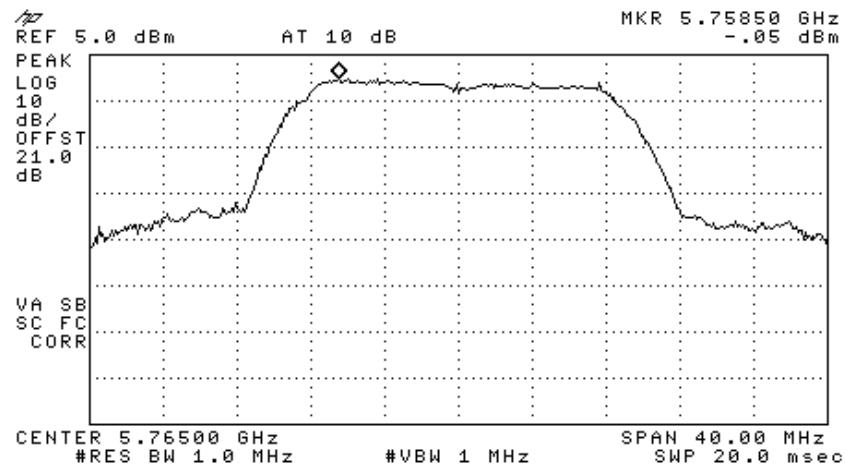


Figure 55 —5765 MHz BPSK

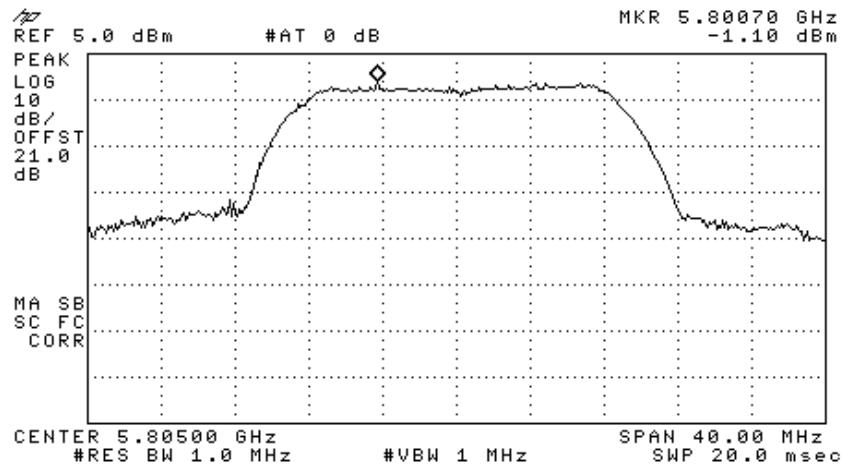


Figure 56 —5805 MHz BPSK

8.2 Results table

E.U.T. Description: WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points
 Model No.: 860M With WCE
 Serial Number: 1. 860M: 73903D 2. WCE: 739038
 Specification: F.C.C. Part 15, Subpart E (15.407(a))

Operation Frequency (MHz)	Modulation	Reading Spectrum Analyzer (dBm)	Specification (dBm)	Margin (dB)
5180	64QAM	2.23	3	-0.77
	BPSK	0.42	3	-2.58
5200	64QAM	0.83	3	-2.17
	BPSK	2.24	3	-0.76
5240	64QAM	2.66	3	-0.34
	BPSK	0.50	3	-2.50
5745	64QAM	3.45	16	-12.55
	BPSK	1.03	16	-14.97
5765	64QAM	4.36	16	-11.64
	BPSK	0.05	16	-15.95
5805	64QAM	3.26	16	-12.74
	BPSK	1.10	16	-14.90

Figure 57 Test Results



JUDGEMENT: Passed by 0.34 dB

TEST PERSONNEL:

Tester Signature: E. Pitt

Date: 28.02.08

Typed/Printed Name: E. Pitt

8.3 Test Equipment Used.

Peak Power Spectral Density

Instrument	Manufacturer	Model	Serial/Part Number	Calibration	
				Last Calibr.	Period
Spectrum Analyzer	HP	8592L	3826A01204	February 22, 2007	1 year
Attenuator	Jyebao	-	FAT-AM5AF5G6G2W20	May 9, 2007	1 year
Cable	Rhophase	KPS-5000-KPS	A1674	February 8, 2008	1 year

Figure 58 Test Equipment Used

9. Ratio of Peak Excursion of Modulation Envelope to Maximum Conducted Output Power 5GHz Transmitter 802.11b/g+802.11a Signals

[In accordance with section 15.407(a)(6)]

9.1 ***Test procedure***

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator (20dB) and an appropriate coaxial cable (Cable Loss = 1 dB). The spectrum analyzer was set to 1 MHz resolution BW. and 1 MHz video BW.

Trace A: Sample Detector

Trace B: Peak Detector

The E.U.T. was tested at 5180, 5200, 5240, 5745, 5765, and 5805 MHz with the following modulations: 64QAM (54Mbit/sec) and BPSK (6Mbit/sec).

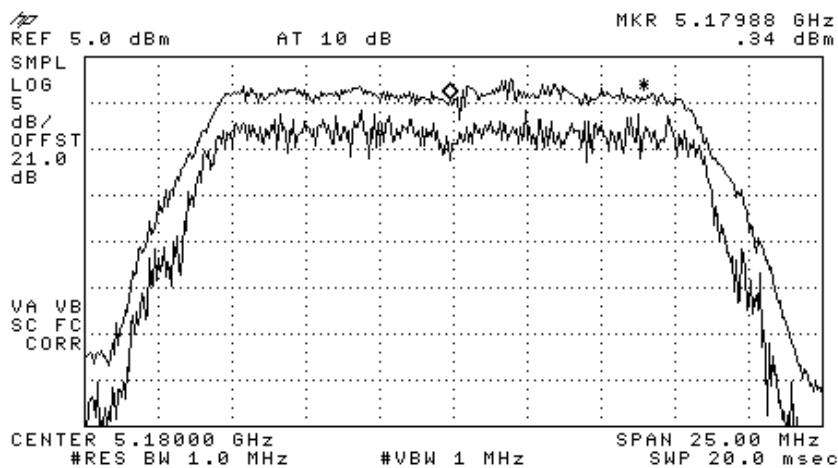


Figure 59 —5180 MHz 64QAM

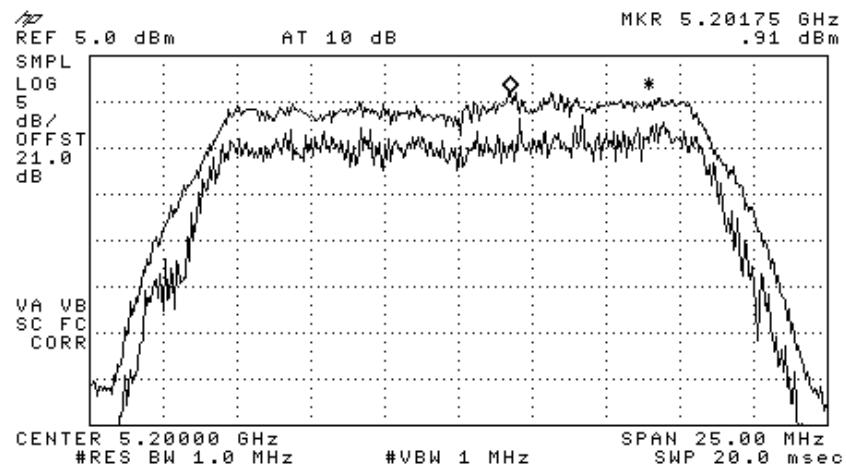


Figure 60 —5200 MHz 64QAM

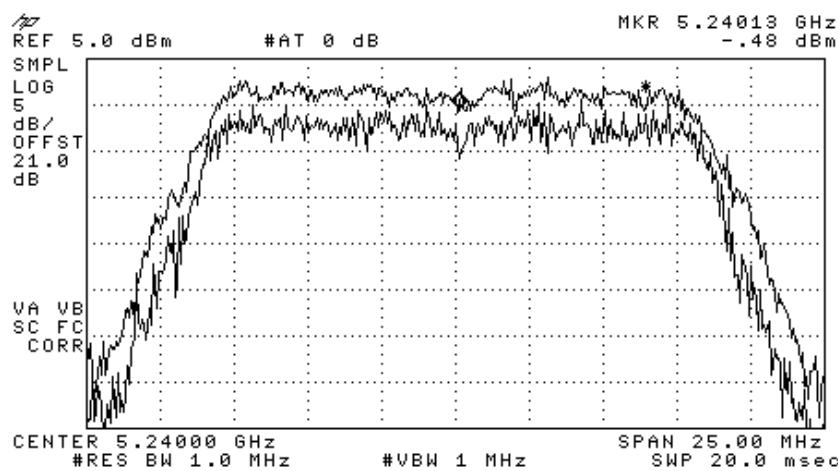


Figure 61 —5240 MHz 64QAM

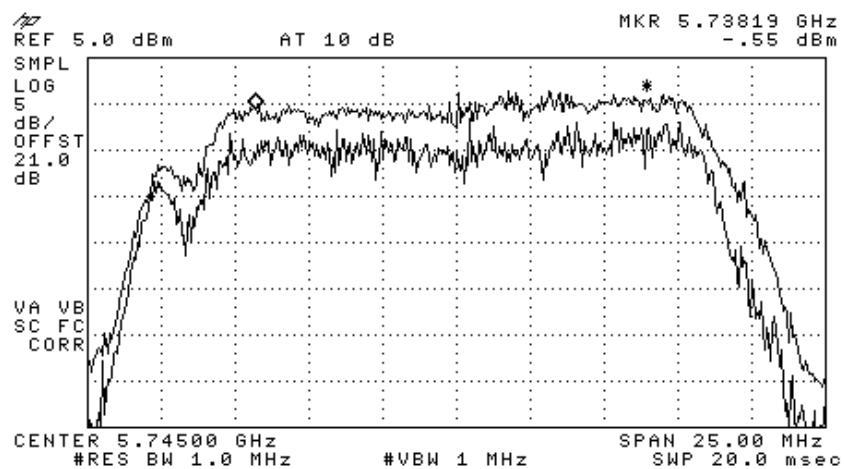


Figure 62 —5745 MHz 64QAM

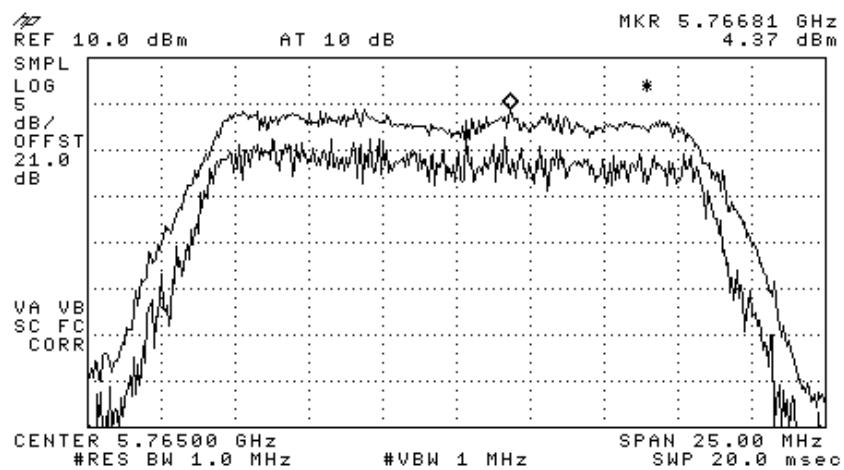


Figure 63 —5765 MHz 64QAM

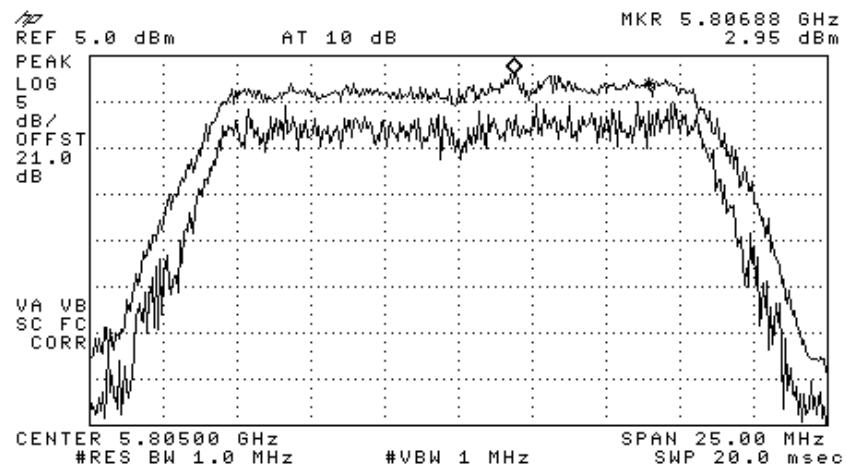


Figure 64 —5805 MHz 64QAM

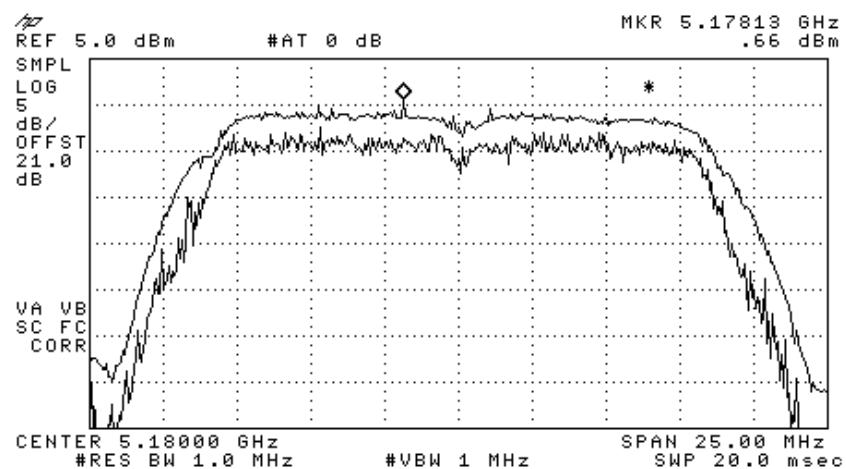


Figure 65 —5180 MHz BPSK

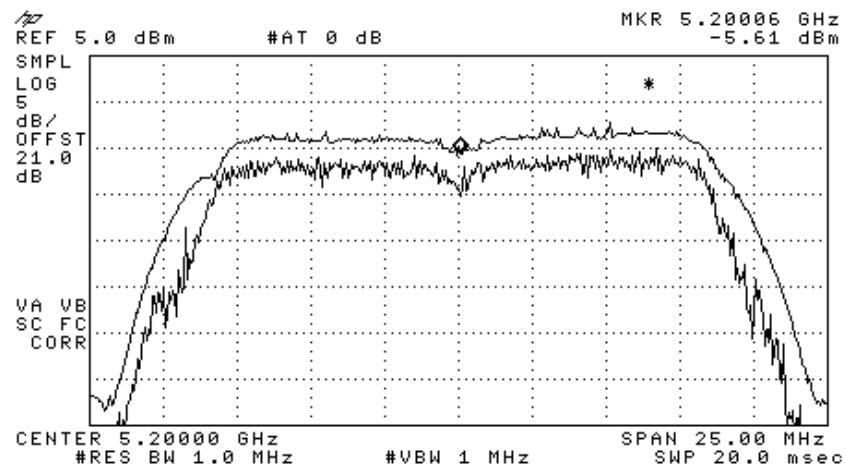


Figure 66 —5200 MHz BPSK

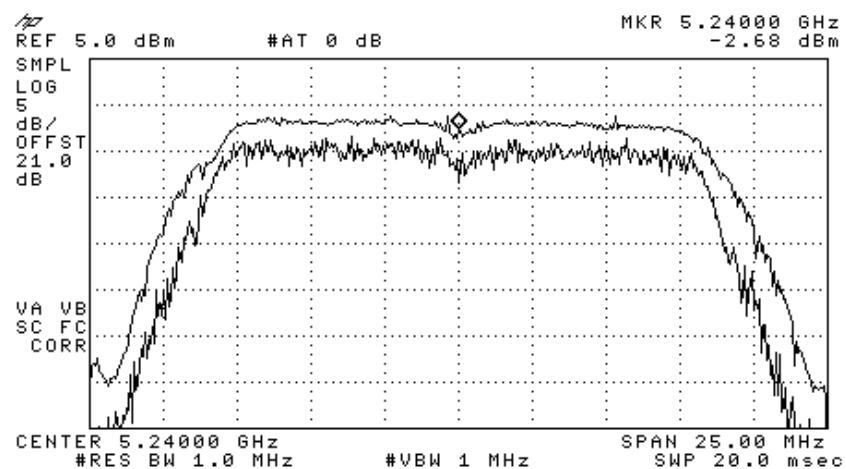


Figure 67 —5240 MHz BPSK

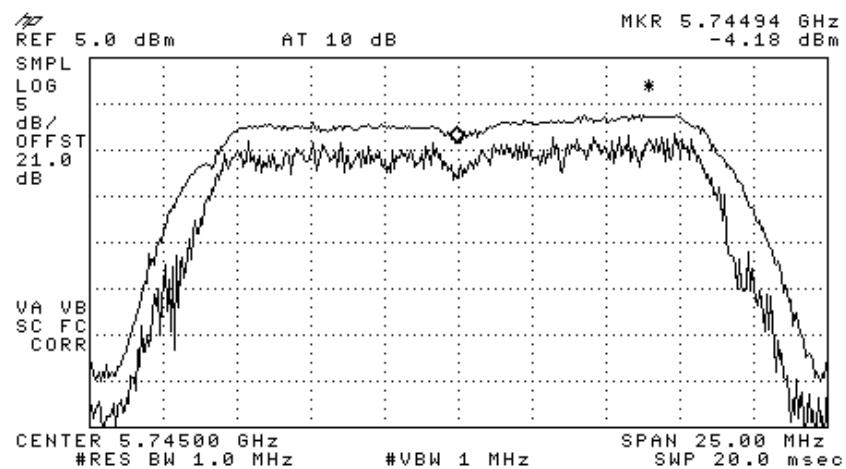


Figure 68 —5745 MHz BPSK

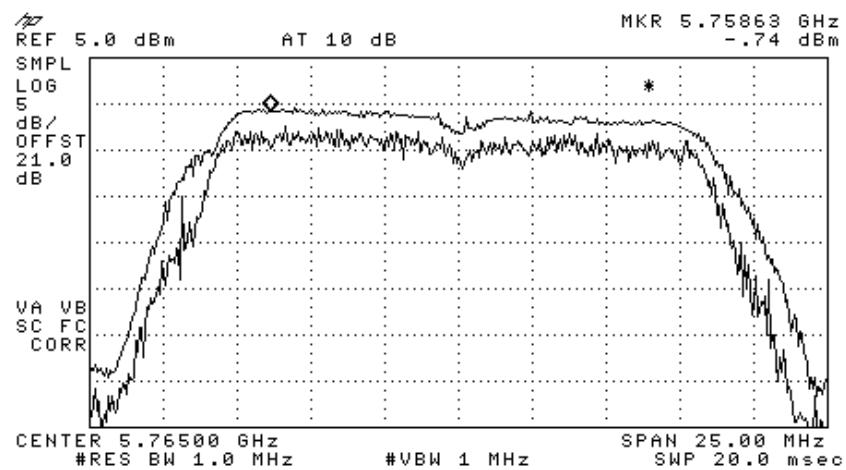


Figure 69 —5765 MHz BPSK

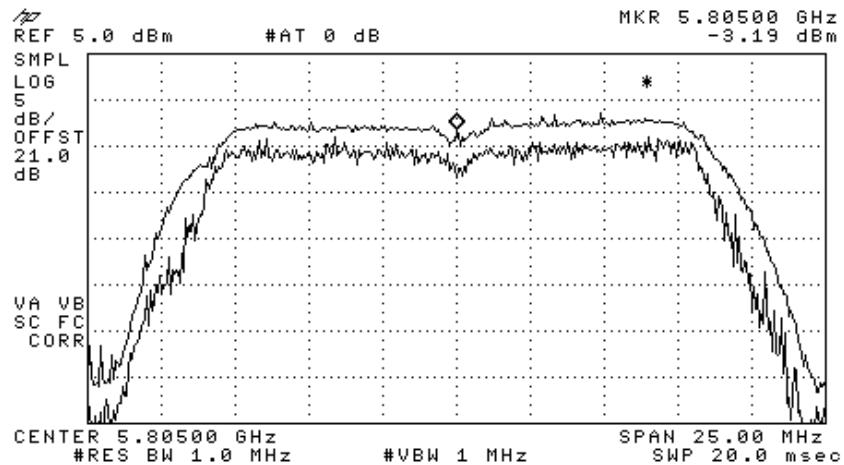


Figure 70 —5805 MHz BPSK

9.2 Results table

E.U.T. Description: WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points
 Model No.: 860M With WCE
 Serial Number: 1. 860M: 73903D 2. WCE: 739038
 Specification: F.C.C. Part 15, Subpart E (15.407(a)(6))

Operation Frequency (MHz)	Modulation	Delta (dB)	Specification (dB)	Margin (dB)
5180	64QAM	6.5	13	-6.5
	BPSK	4.4	13	-8.6
5200	64QAM	5.6	13	-7.4
	BPSK	4.7	13	-8.3
5240	64QAM	5.3	13	-7.7
	BPSK	5.8	13	-7.2
5745	64QAM	5.4	13	-7.6
	BPSK	4.3	13	-8.7
5765	64QAM	7.0	13	-6.0
	BPSK	4.1	13	-6.9
5805	64QAM	5.3	13	-7.7
	BPSK	5.3	13	-7.7

Figure 71 Test Results



JUDGEMENT: Passed by 6.0 dB

TEST PERSONNEL:

Tester Signature: Pitt Date: 28.02.08
Typed/Printed Name: E. Pitt

9.3 Test Equipment Used.

Peak Power Spectral Density

Instrument	Manufacturer	Model	Serial/Part Number	Calibration	
				Last Calibr.	Period
Spectrum Analyzer	HP	8592L	3826A01204	February 22, 2007	1 year
Attenuator	Jyebao	-	FAT-AM5AF5G6G2W20	May 9, 2007	1 year
Cable	Rhophase	KPS-5000-KPS	A1674	February 8, 2008	1 year

Figure 72 Test Equipment Used

10. Peak Power Output Out of 5150-5250; 5725-5825 MHz Bands 5 GHz Transmitter 802.11b/g+802.11a Signals

10.1 Test procedure

The E.U.T. antenna terminal was connected to the spectrum analyzer through an appropriate coaxial cable. The spectrum analyzer was set to 1 MHz resolution BW except for the frequency range 9 kHz-150 kHz where the RBW was set to 1kHz and the frequency range 150 kHz-10.0 MHz where the RBW was set to 10kHz. The frequency range from 9 kHz to 40 GHz was scanned. Level of spectrum components out of the 5150-5250; 5725-5825 MHz bands was measured at the selected operation frequencies.

The E.U.T. was tested at 5180, 5200, 5240, 5745, 5765, and 5805 MHz with the following modulations: 64QAM (54Mbit/sec) and BPSK (6Mbit/sec).

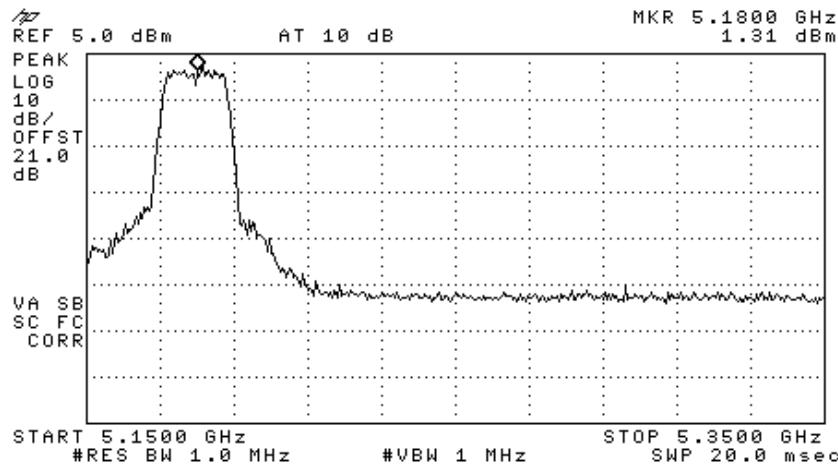


Figure 73 —5180 MHz 64QAM

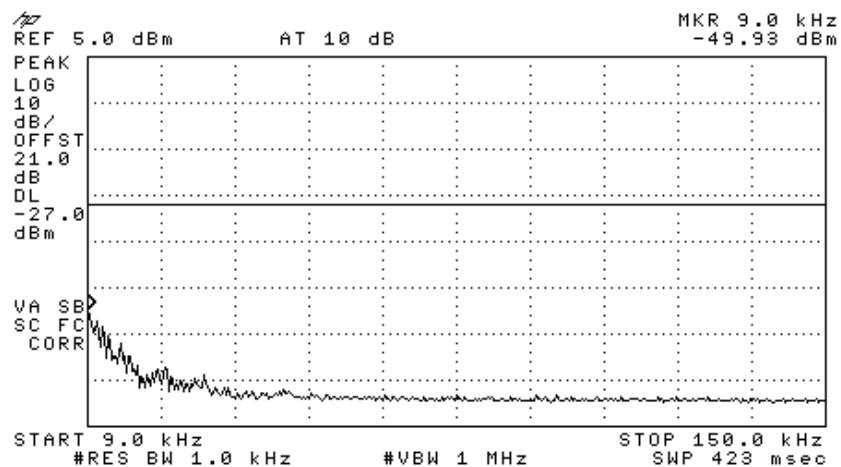


Figure 74 —5180 MHz 64QAM

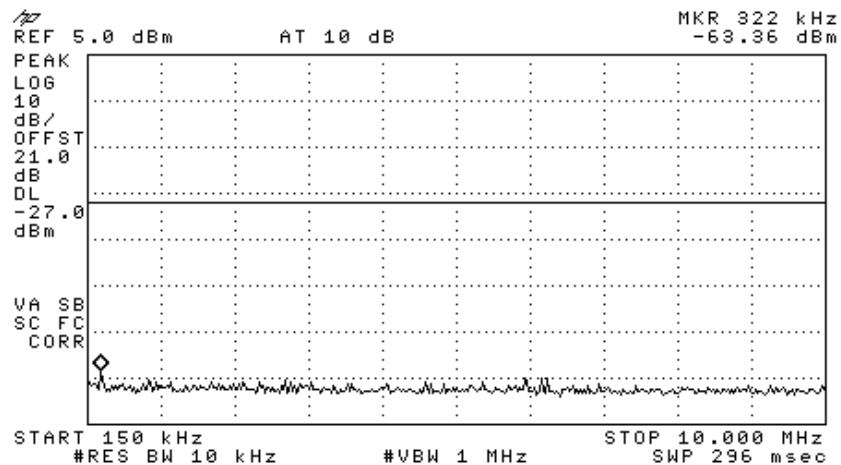


Figure 75 —5180 MHz 64QAM

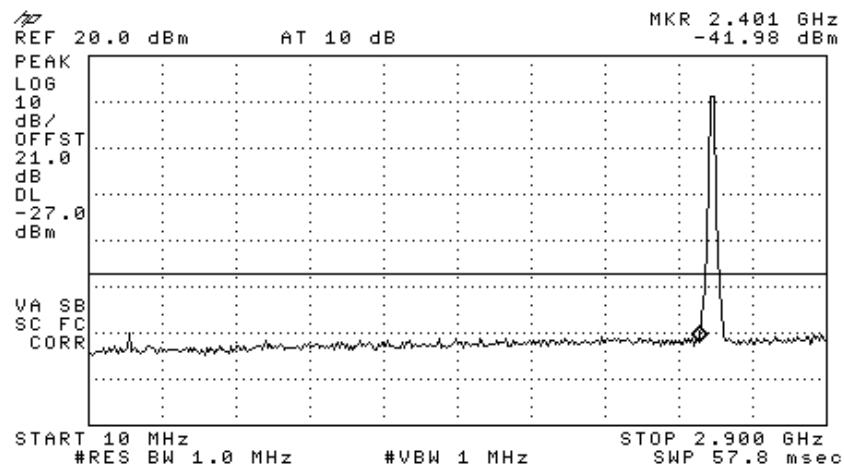


Figure 76 —5180 MHz 64QAM

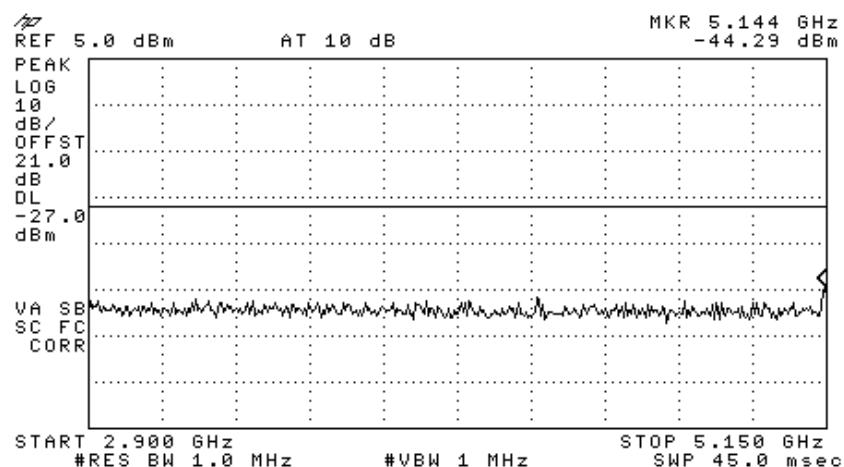


Figure 77 —5180 MHz 64QAM

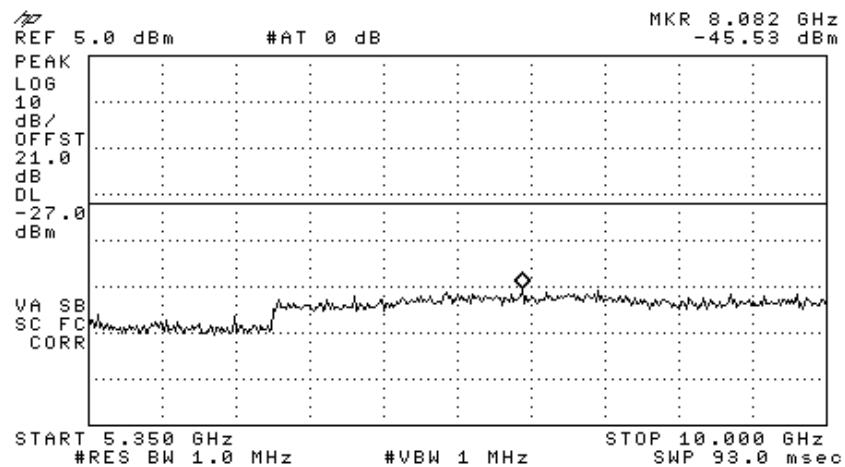


Figure 78 —5180 MHz 64QAM

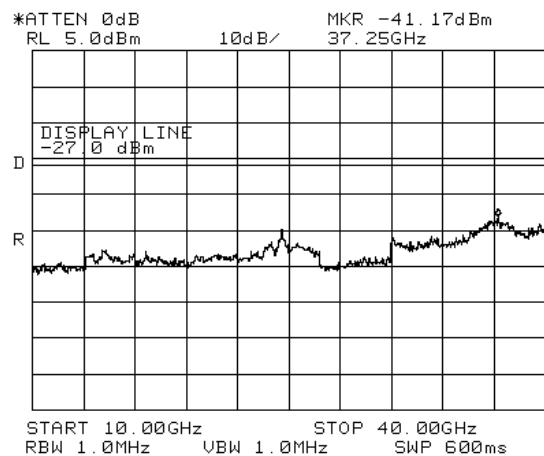


Figure 79 —5180 MHz 64QAM

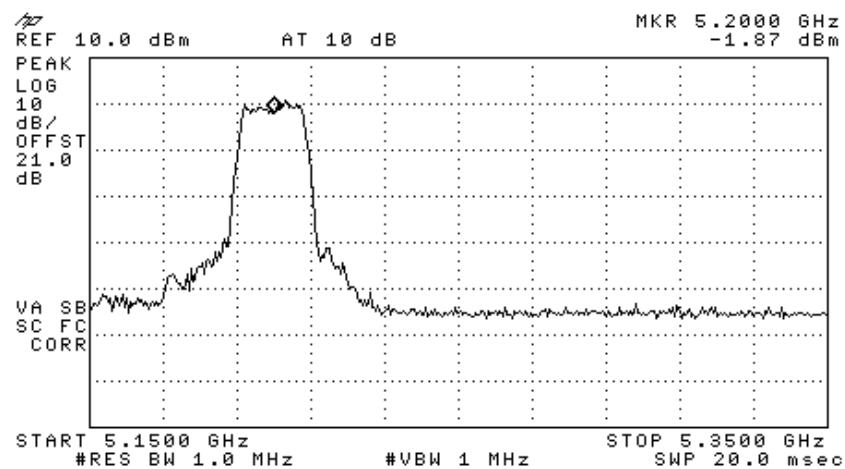


Figure 80 —5200 MHz 64QAM

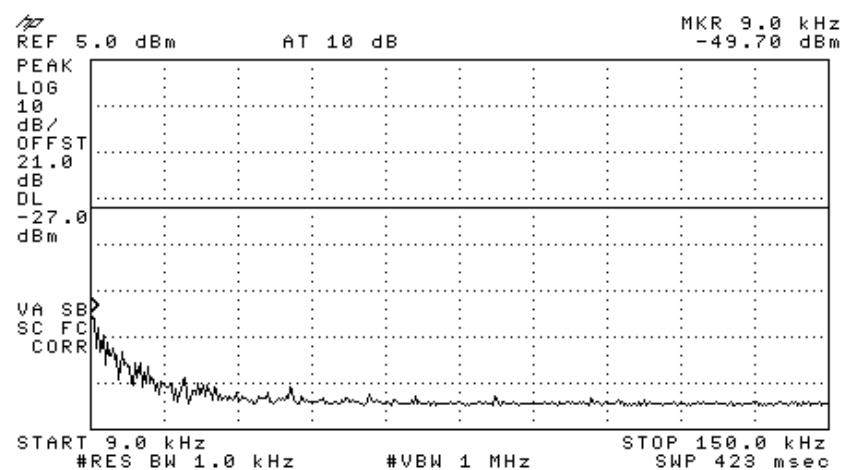


Figure 81 —5200 MHz 64QAM

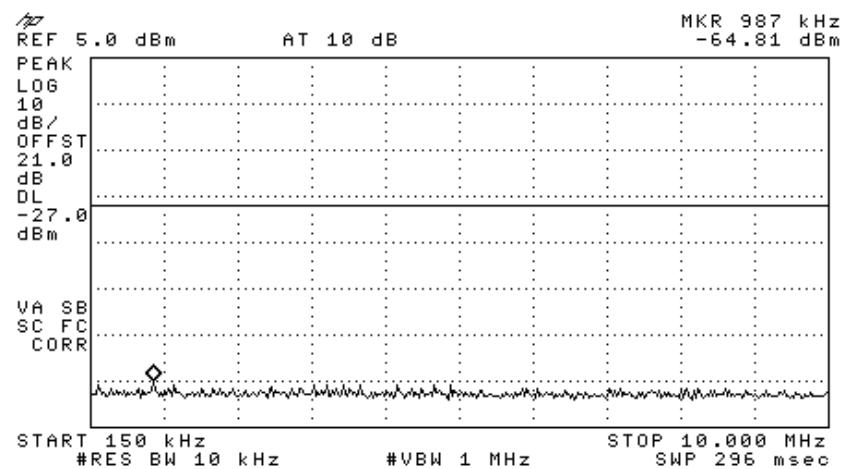


Figure 82 — 5200 MHz 64QAM

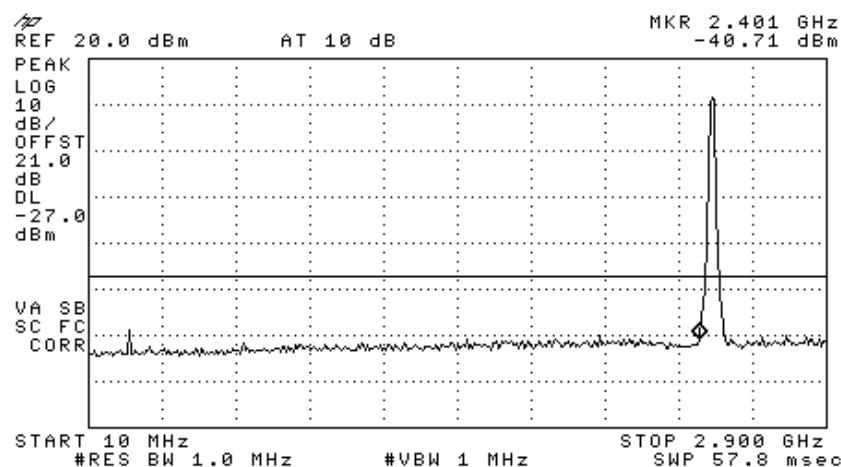


Figure 83 — 5200 MHz 64QAM

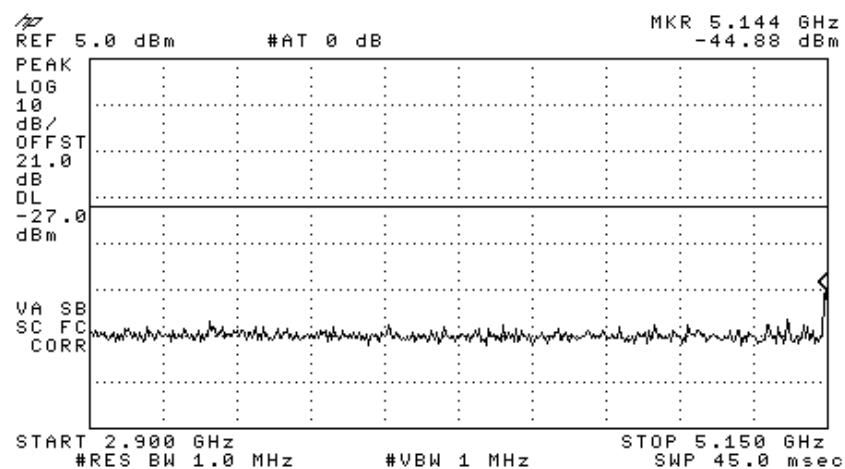


Figure 84 —5200 MHz 64QAM

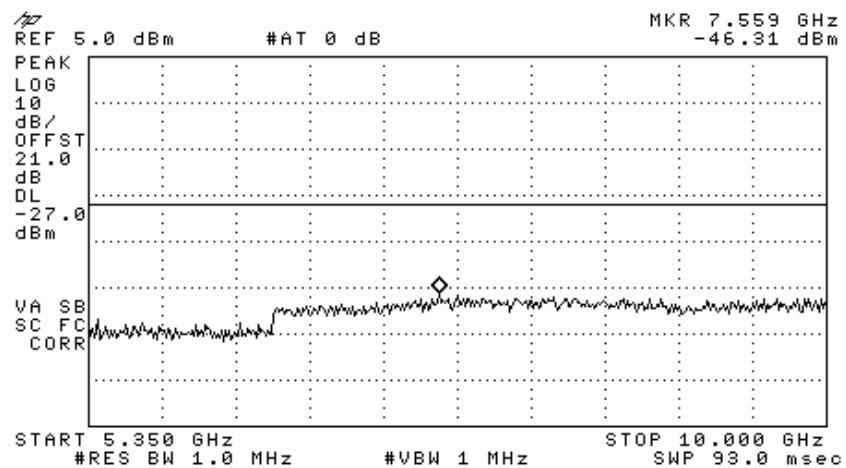


Figure 85 —5200 MHz 64QAM

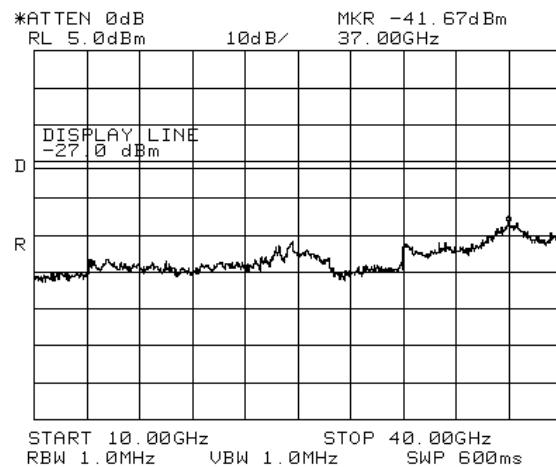


Figure 86 —5200 MHz 64QAM

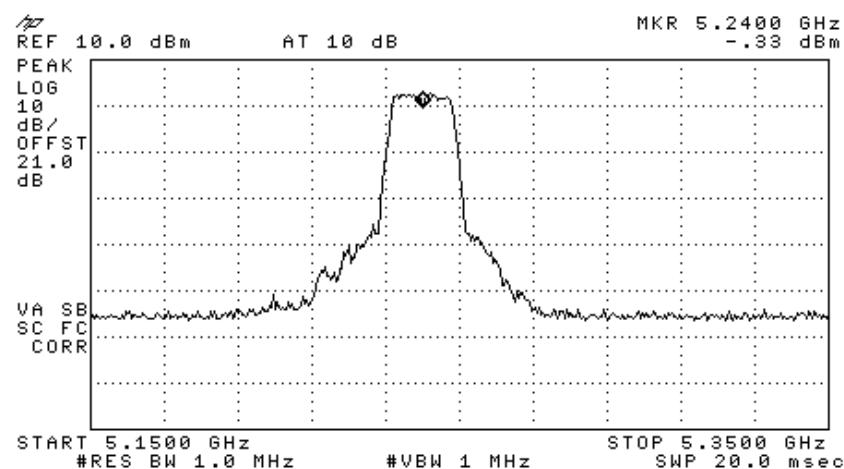


Figure 87 —5240 MHz 64QAM

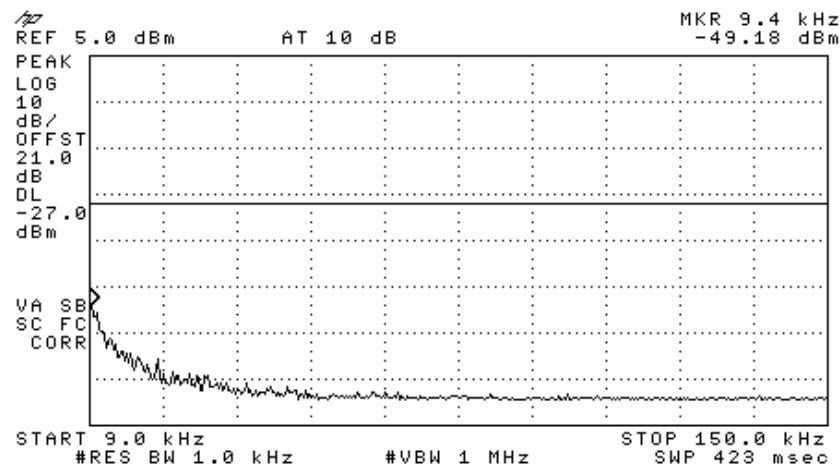


Figure 88 —5240 MHz 64QAM

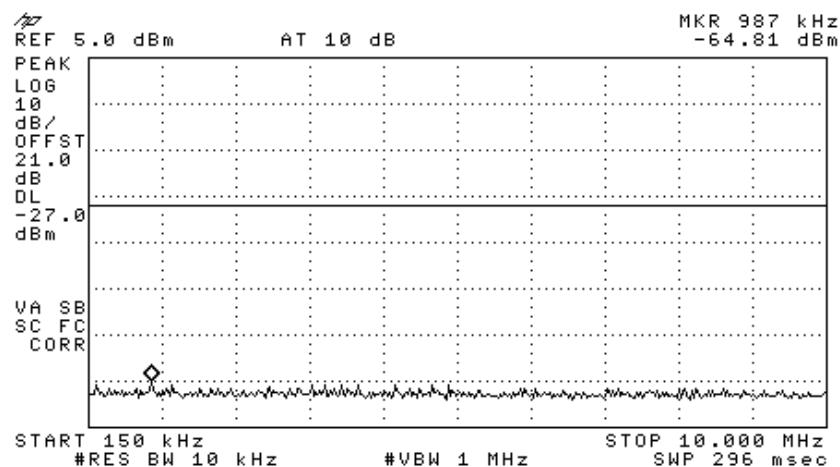


Figure 89 —5240 MHz 64QAM

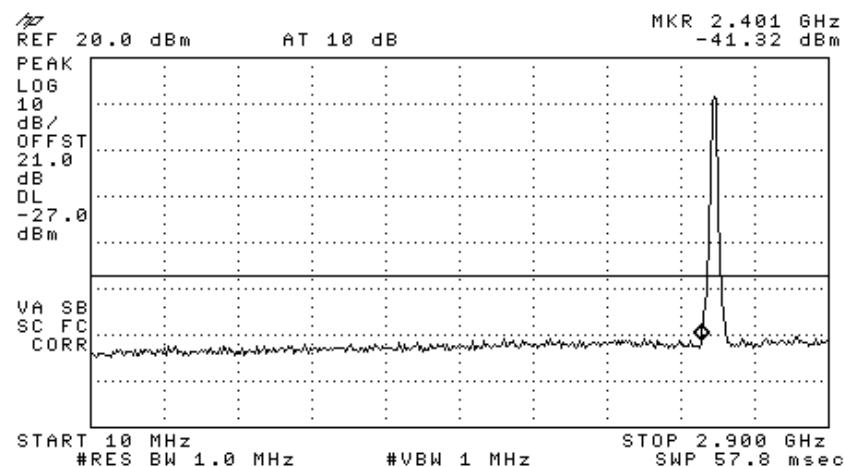


Figure 90 —5200 MHz 64QAM

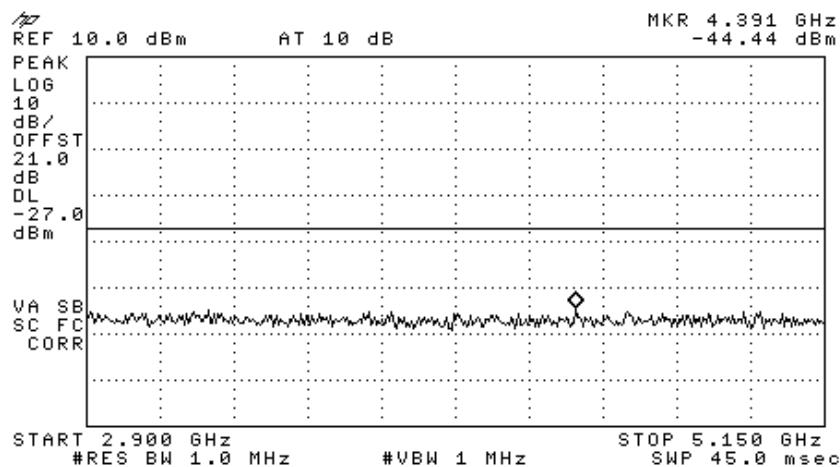


Figure 91 —5200 MHz 64QAM

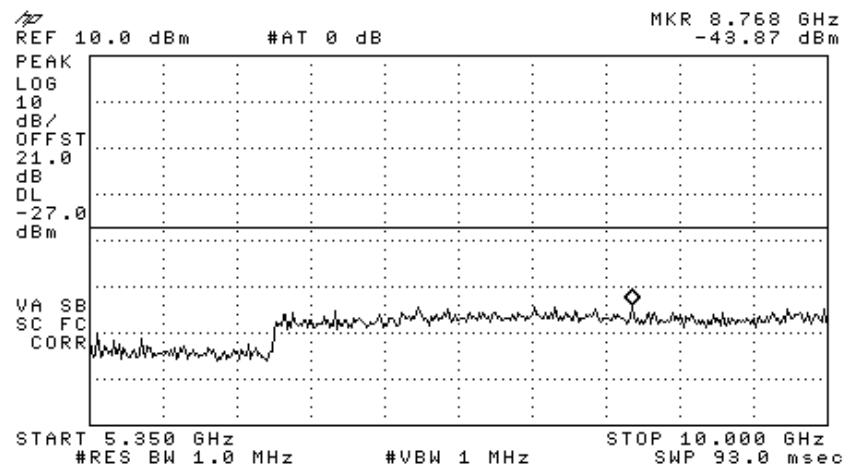


Figure 92 —5200 MHz 64QAM

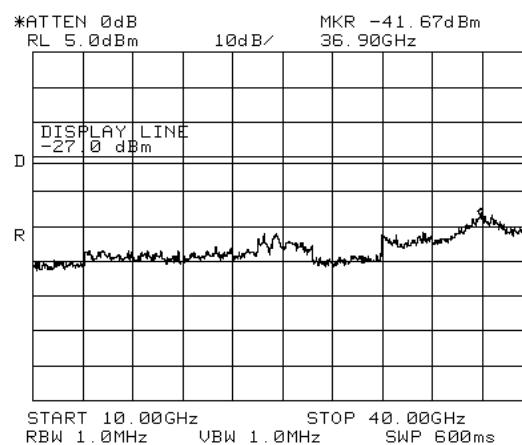


Figure 93 —5240 MHz 64QAM

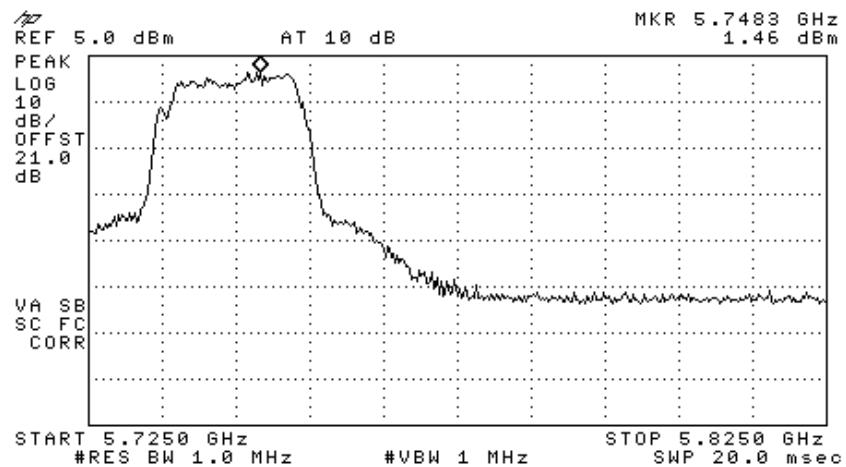


Figure 94 —5745 MHz 64QAM

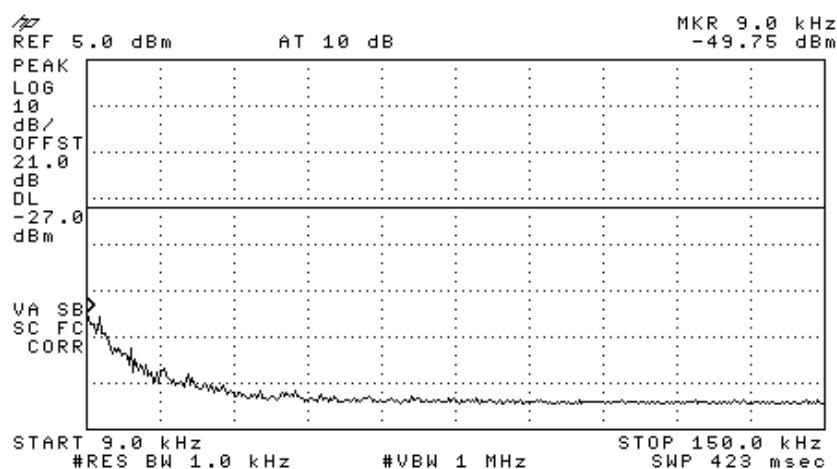


Figure 95 —5745 MHz 64QAM

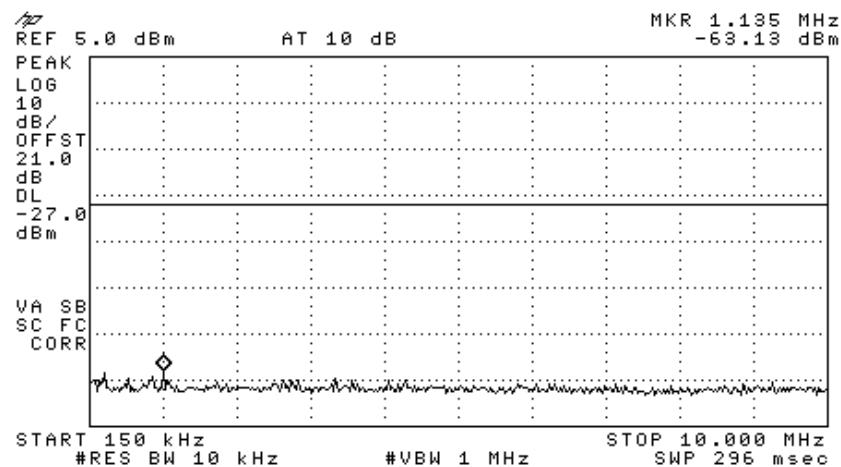


Figure 96 —5745 MHz 64QAM

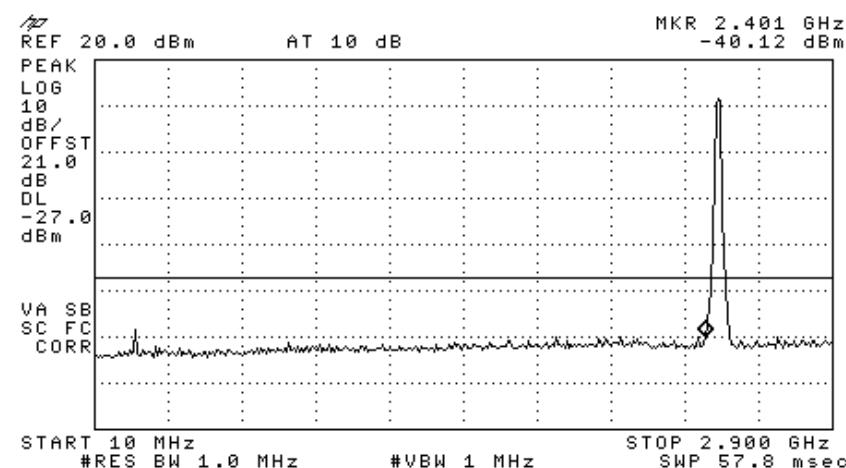


Figure 97 —5745 MHz 64QAM

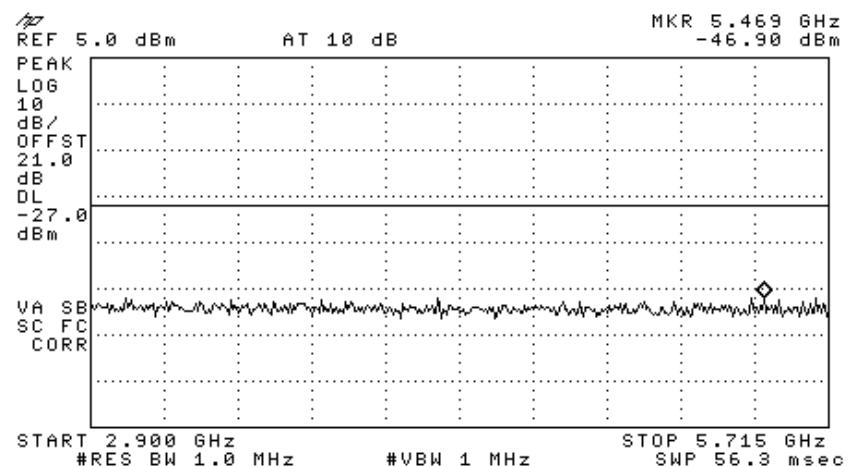


Figure 98 —5745 MHz 64QAM

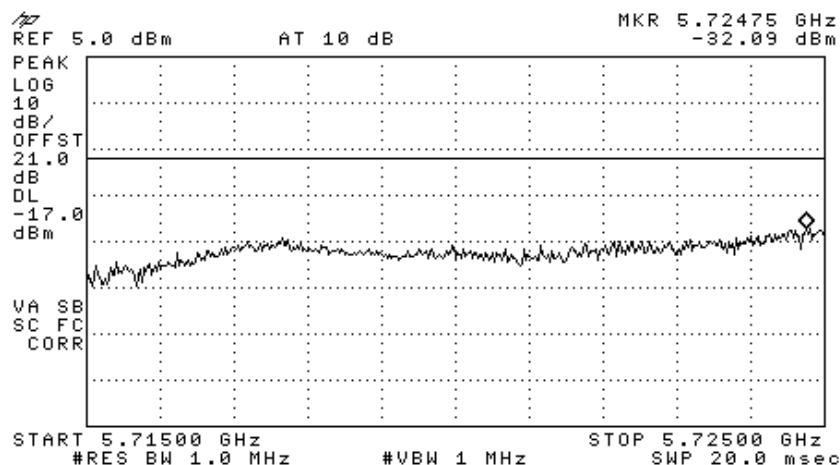


Figure 99 —5745 MHz 64QAM

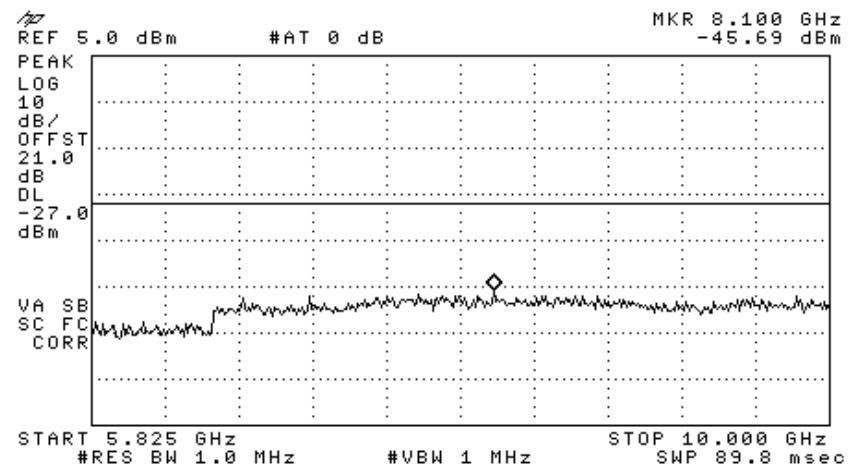


Figure 100 —5745 MHz 64QAM

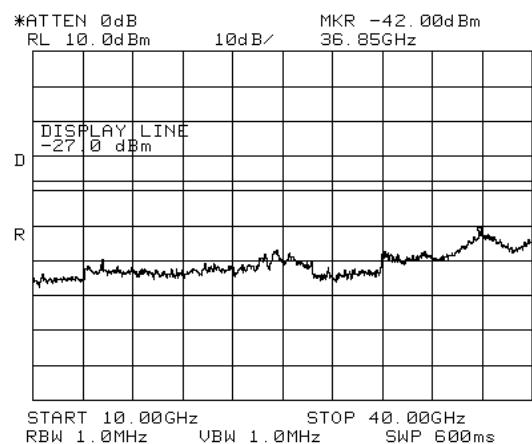


Figure 101 —5745 MHz 64QAM

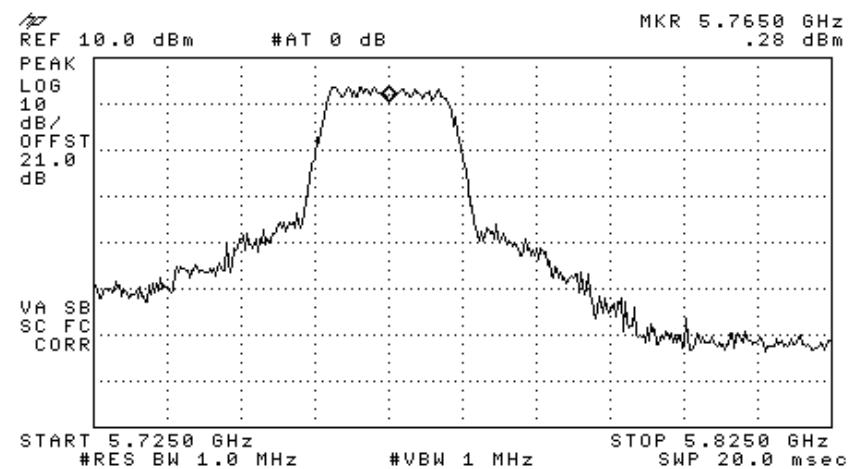


Figure 102 —5765 MHz 64QAM

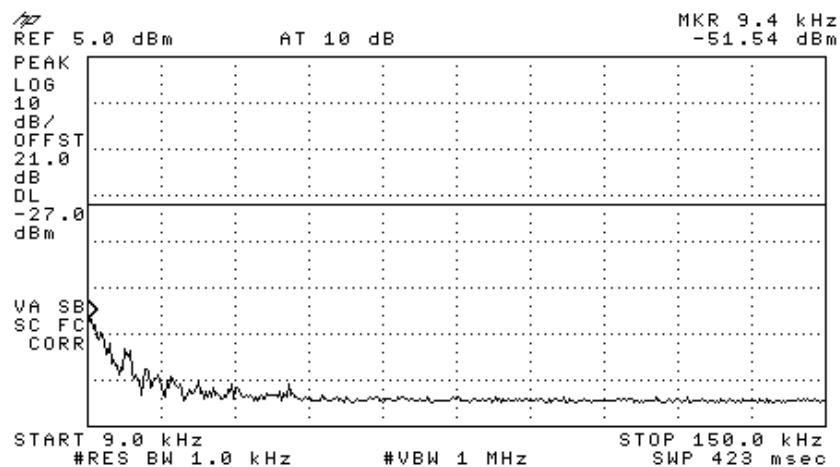


Figure 103 —5765 MHz 64QAM

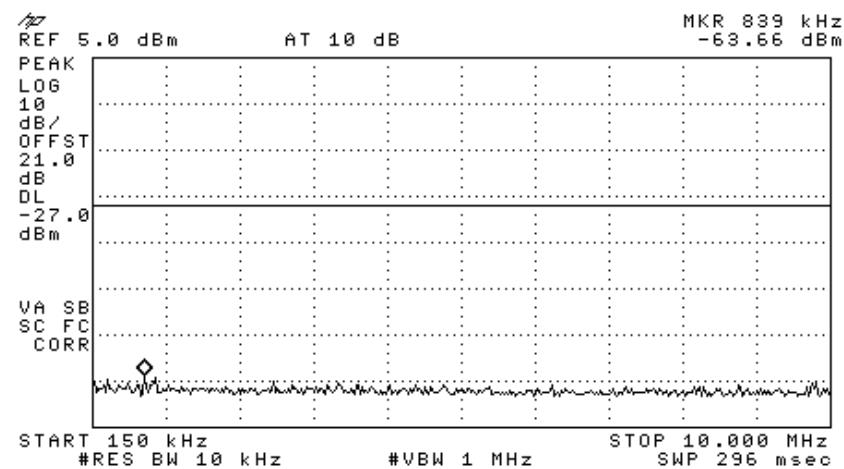


Figure 104 —5765 MHz 64QAM

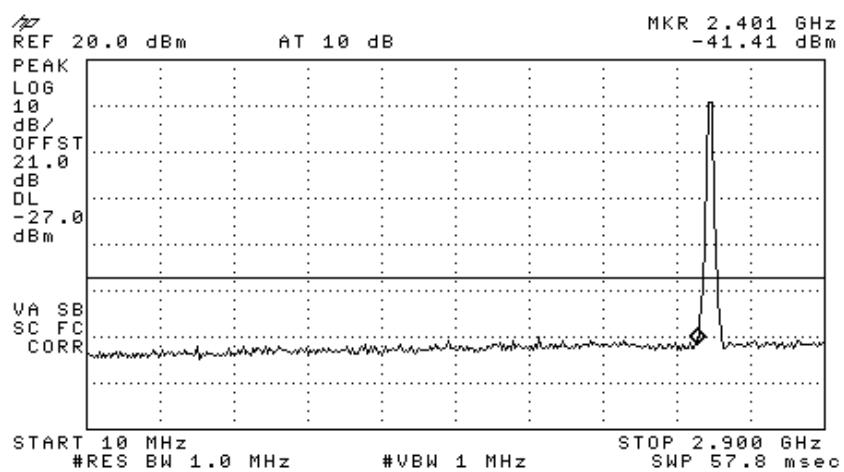


Figure 105 —5765 MHz 64QAM

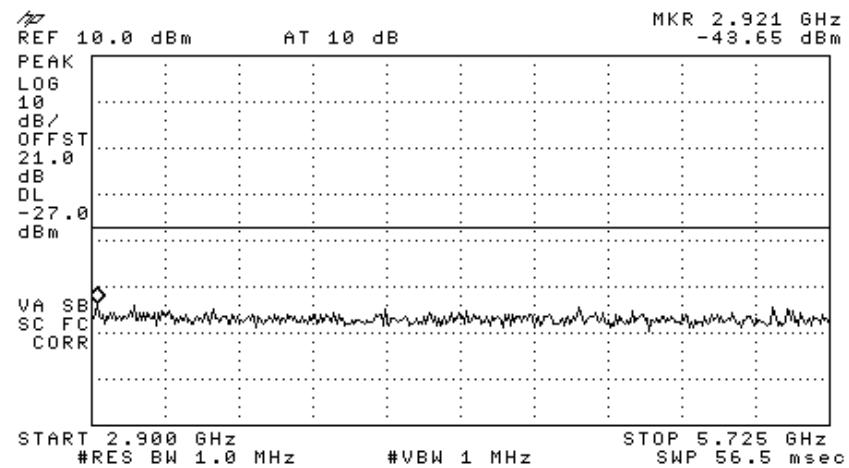


Figure 106 —5765 MHz 64QAM

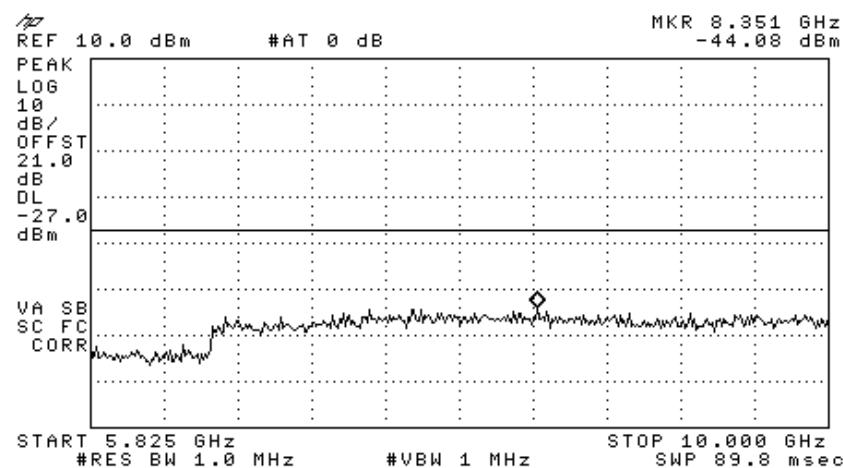


Figure 107 —5765 MHz 64QAM

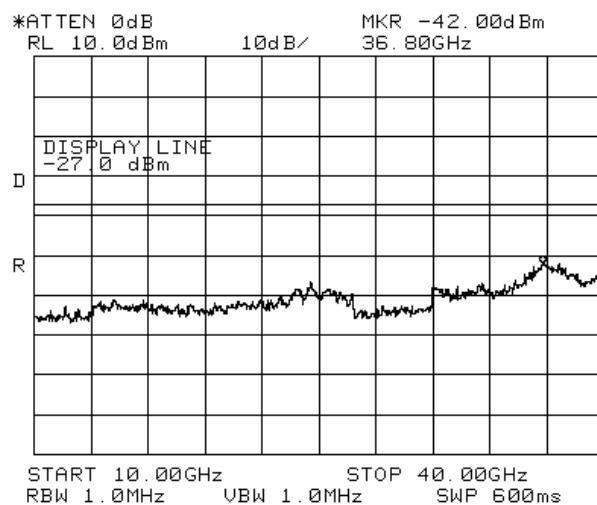


Figure 108 —5765 MHz 64QAM

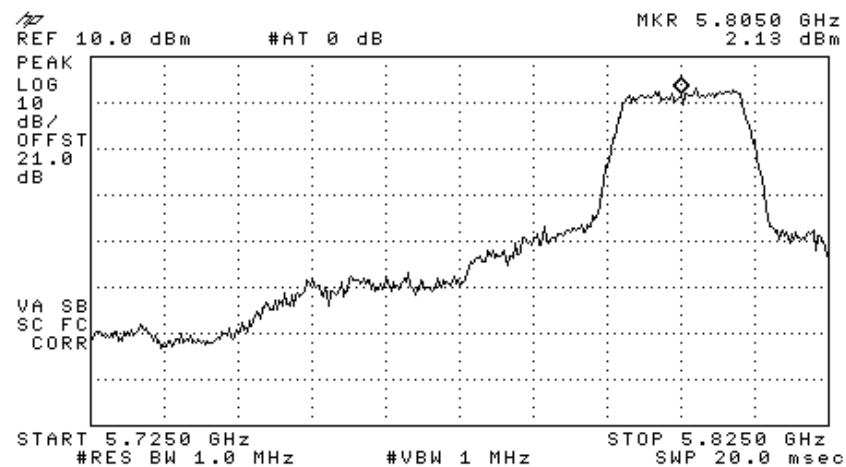


Figure 109 —5805 MHz 64QAM

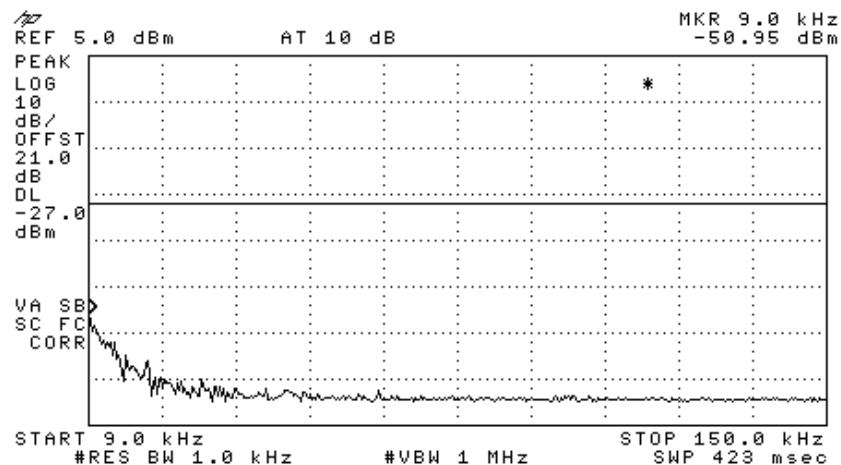


Figure 110 — 5805 MHz 64QAM

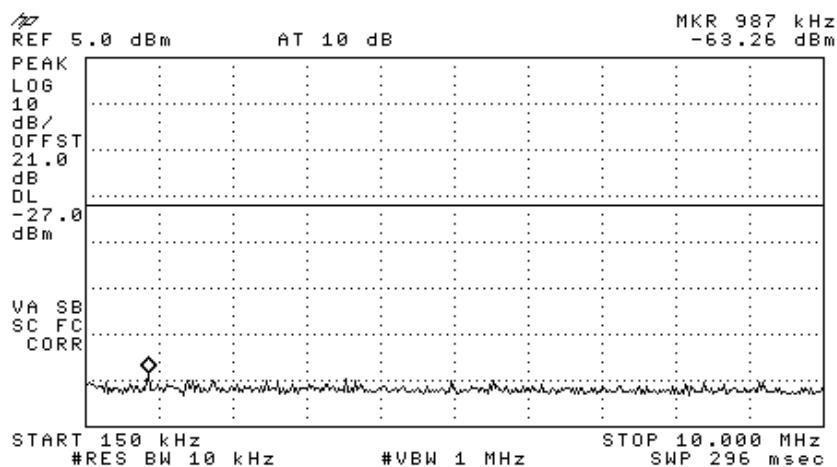


Figure 111 — 5805 MHz 64QAM

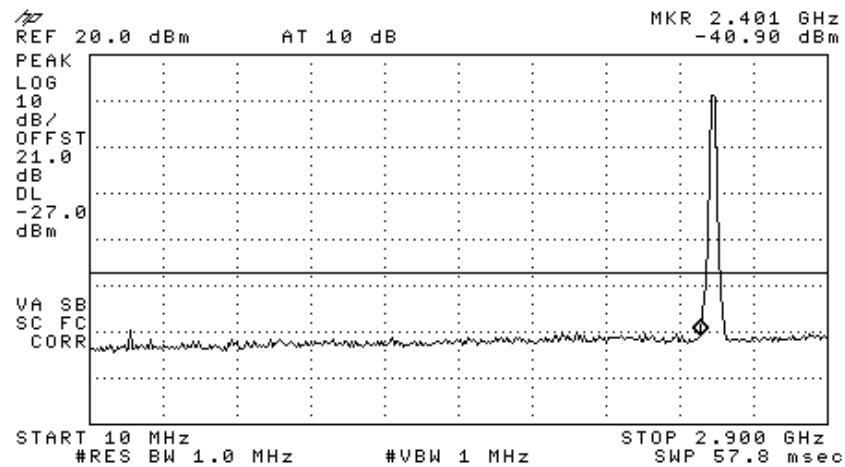


Figure 112 —5805 MHz 64QAM

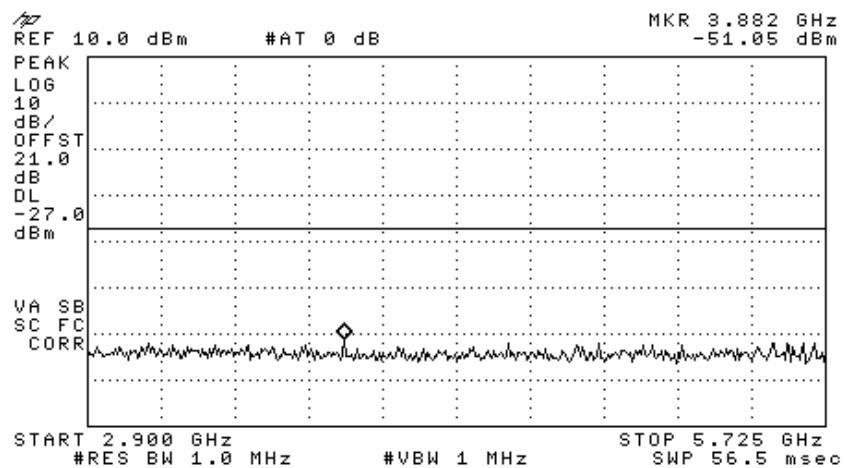


Figure 113 —5805 MHz 64QAM

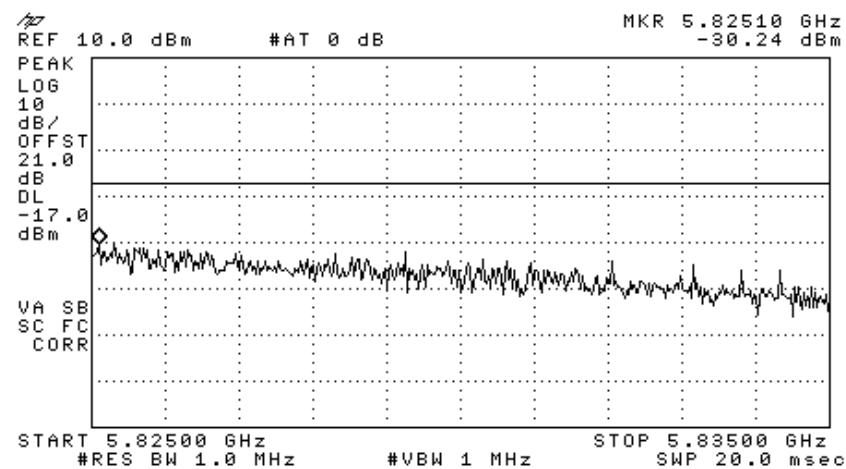


Figure 114 — 5805 MHz 64QAM

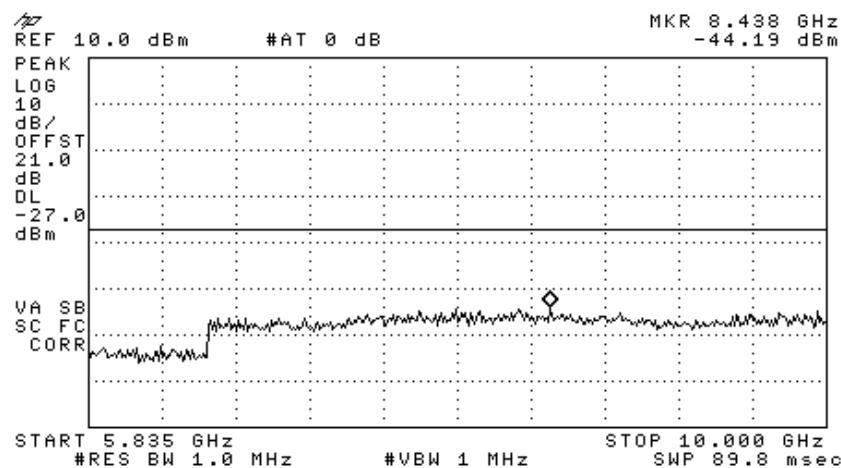


Figure 115 — 5805 MHz 64QAM

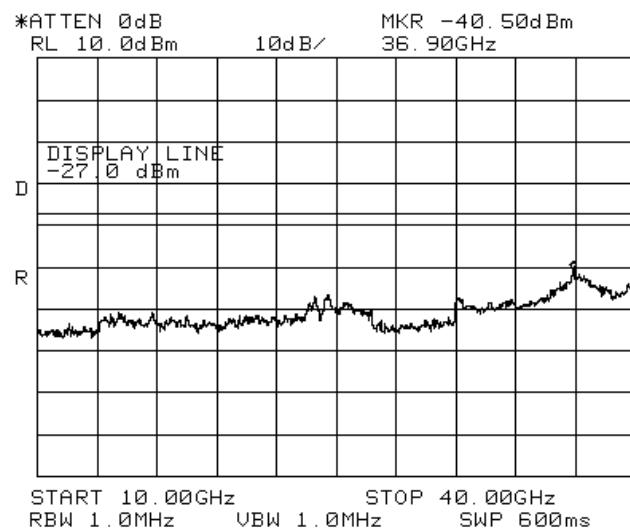


Figure 116 — 5805 MHz 64QAM

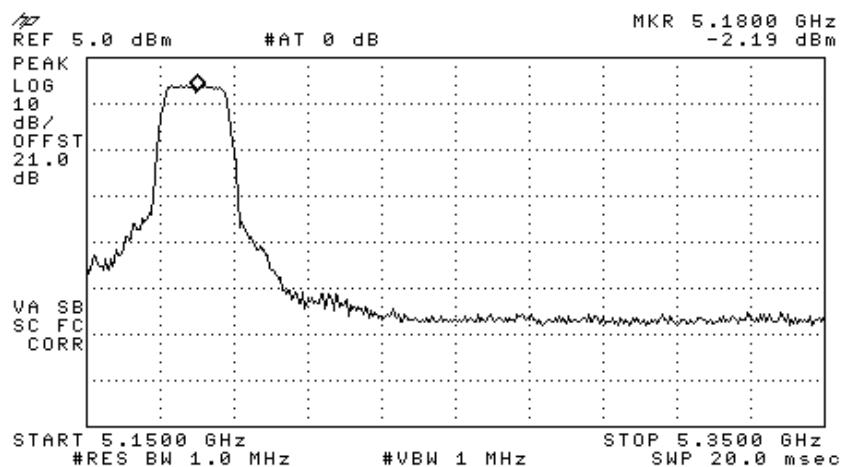


Figure 117 — 5180 MHz BPSK

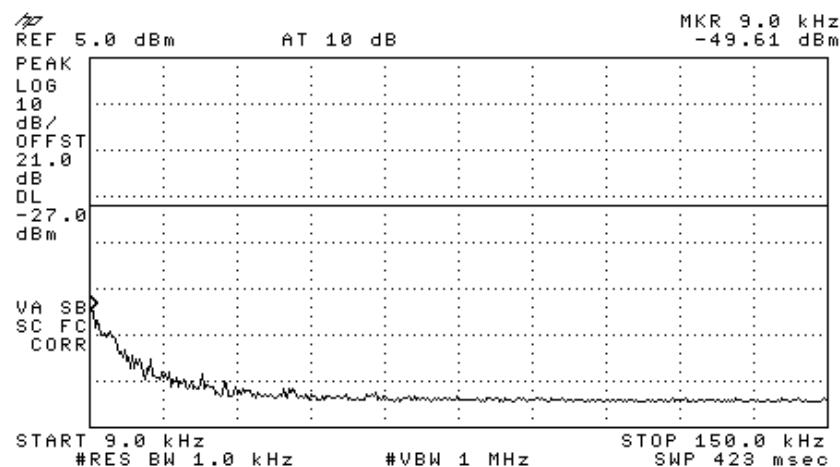


Figure 118 —5180 MHz BPSK

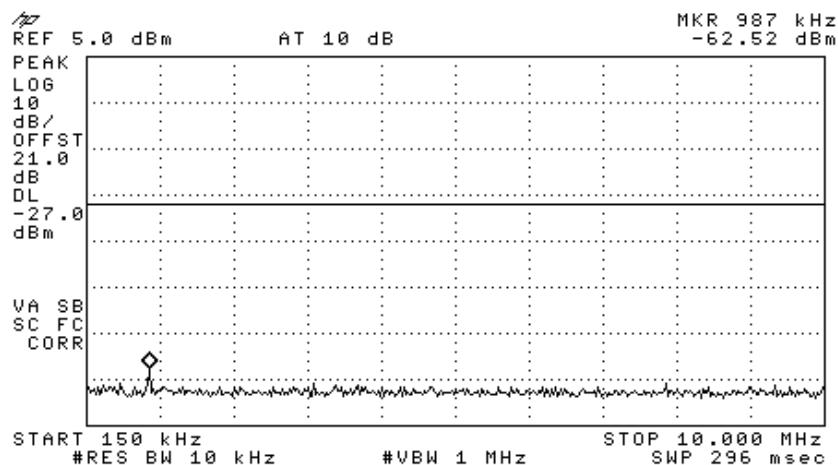


Figure 119 —5180 MHz BPSK

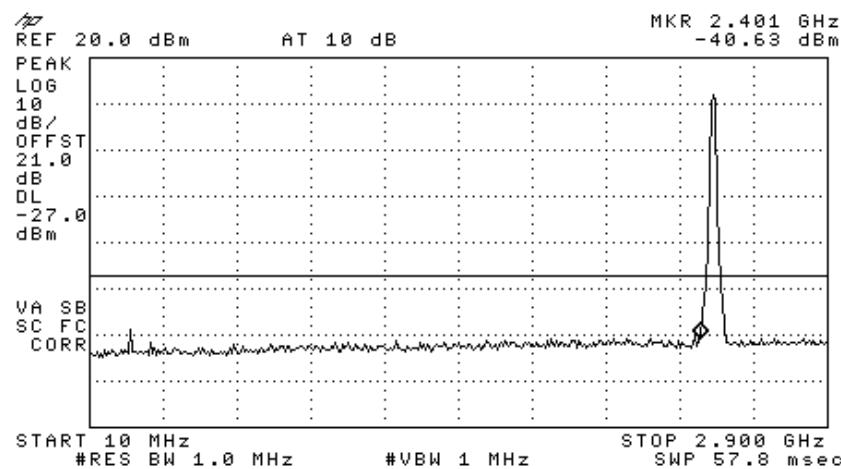


Figure 120 —5180 MHz BPSK

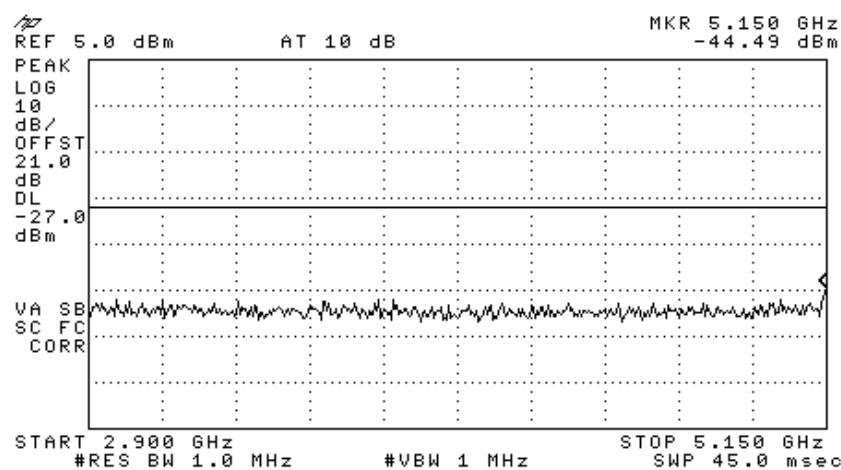


Figure 121 —5180 MHz BPSK

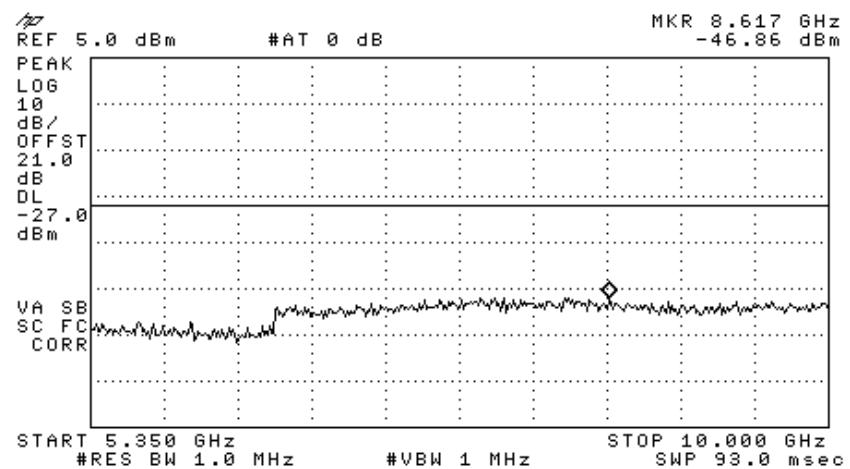


Figure 122 —5180 MHz BPSK

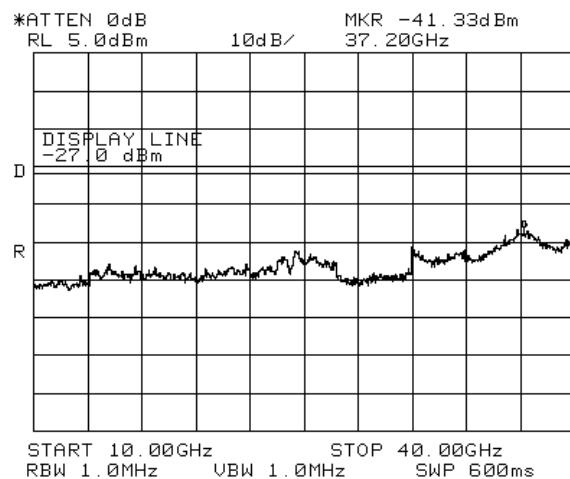


Figure 123 —5180 MHz BPSK

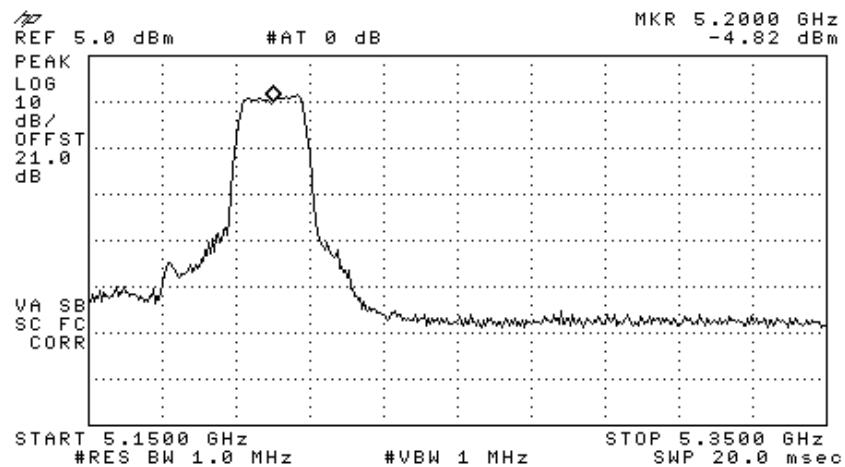


Figure 124 —5200 MHz BPSK

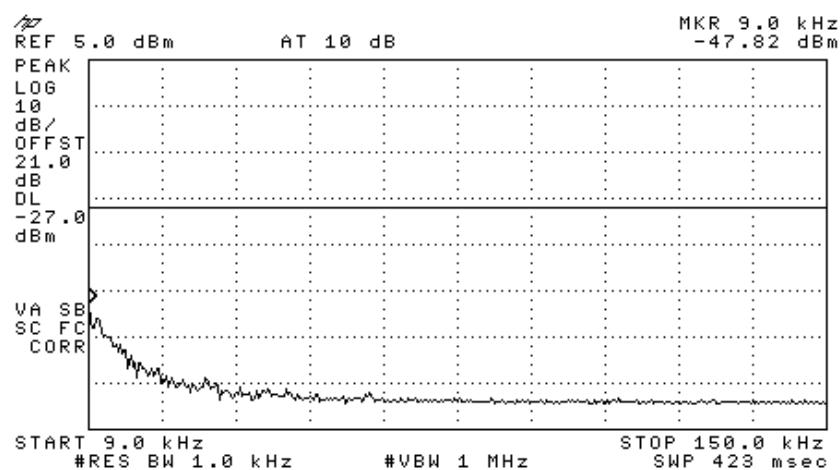


Figure 125 —5200 MHz BPSK

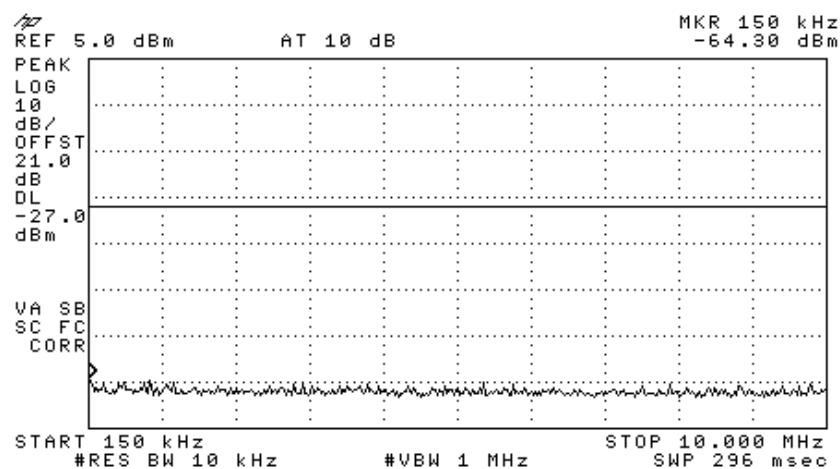


Figure 126 —5200 MHz BPSK

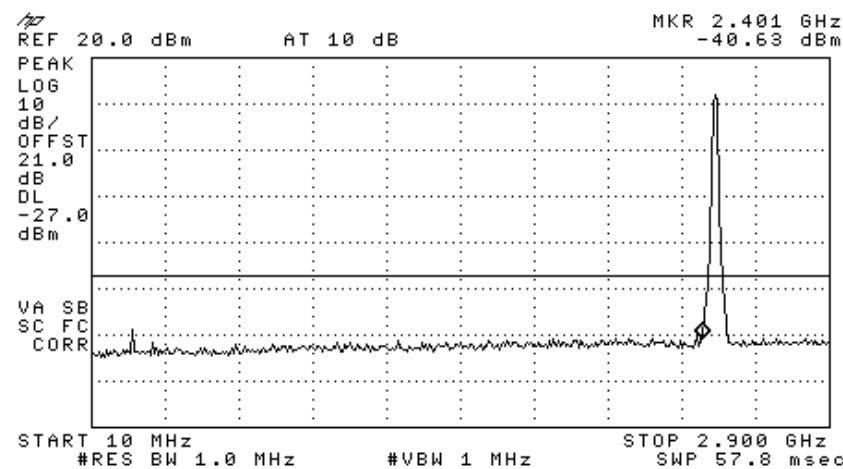


Figure 127 —5200 MHz BPSK

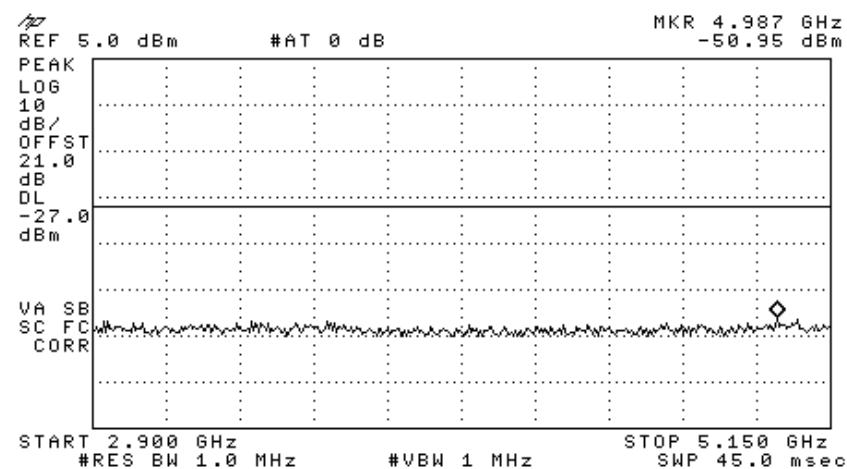


Figure 128 —5200 MHz BPSK

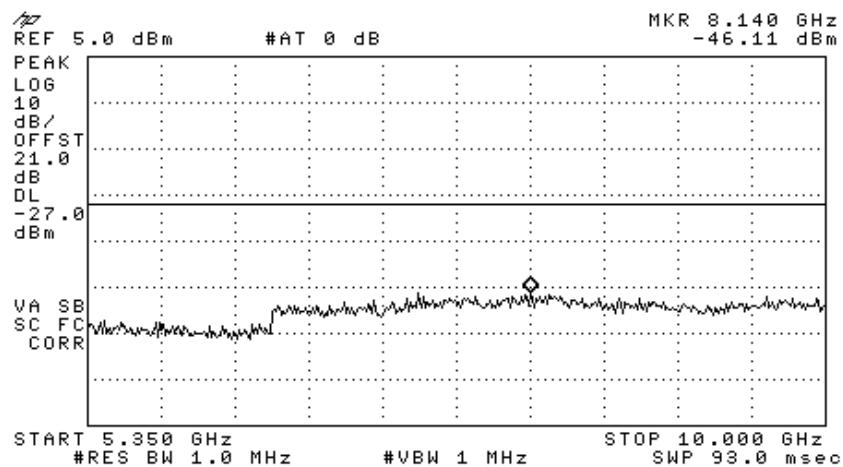


Figure 129 —5200 MHz BPSK

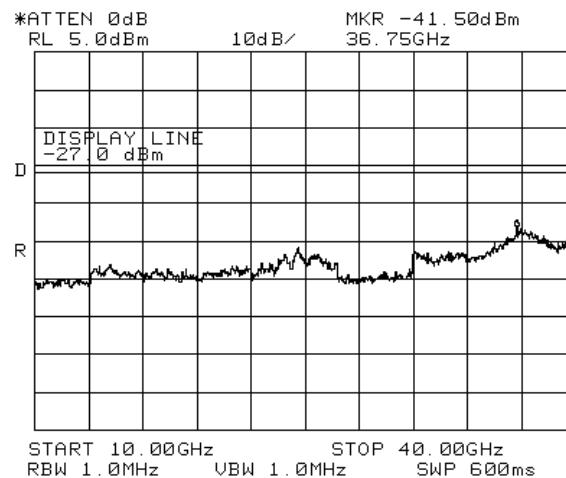


Figure 130 —5200 MHz BPSK

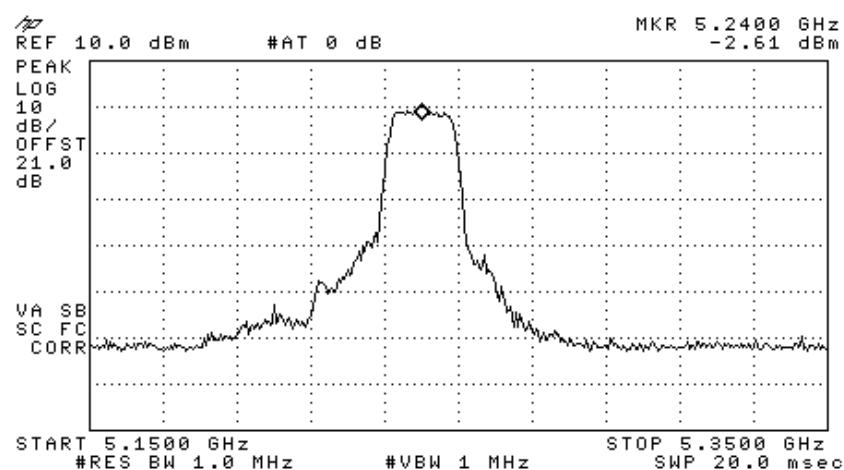


Figure 131 —5240 MHz BPSK

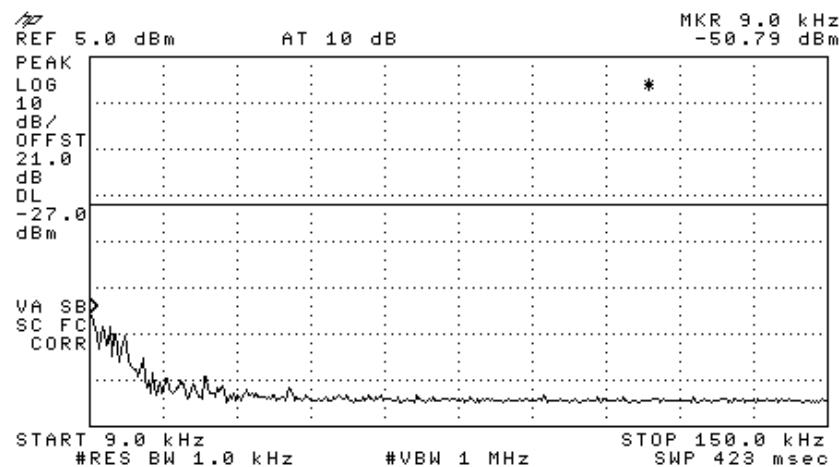


Figure 132 —5240 MHz BPSK

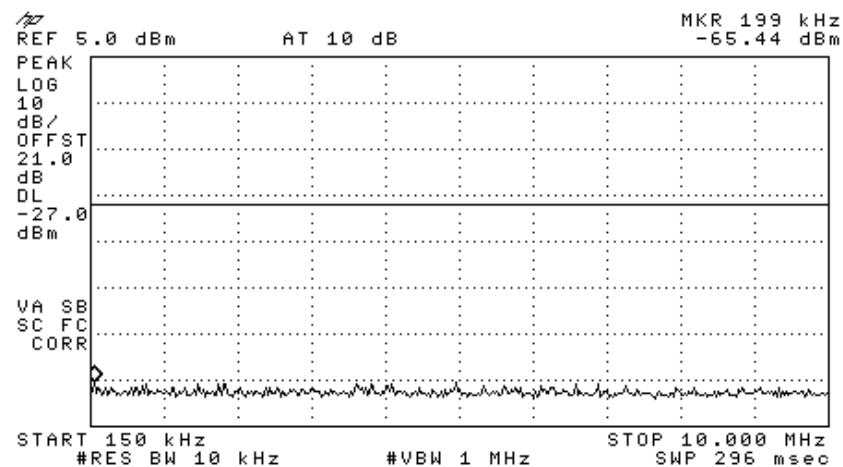


Figure 133 —5240 MHz BPSK

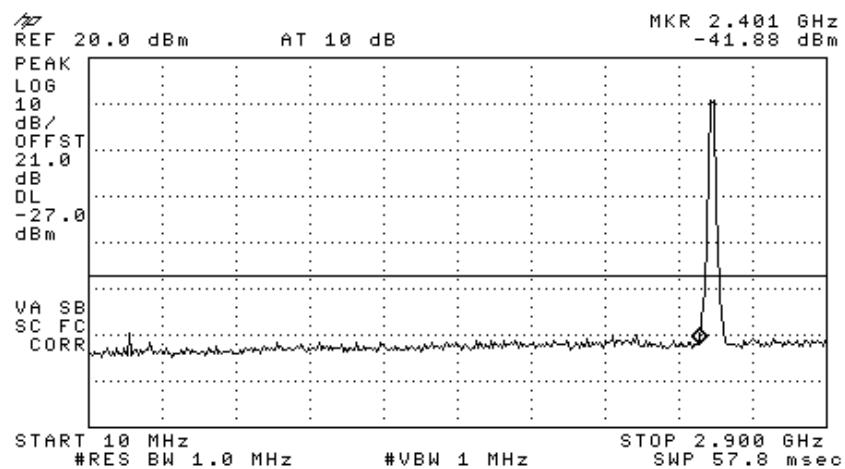


Figure 134 —5240 MHz BPSK

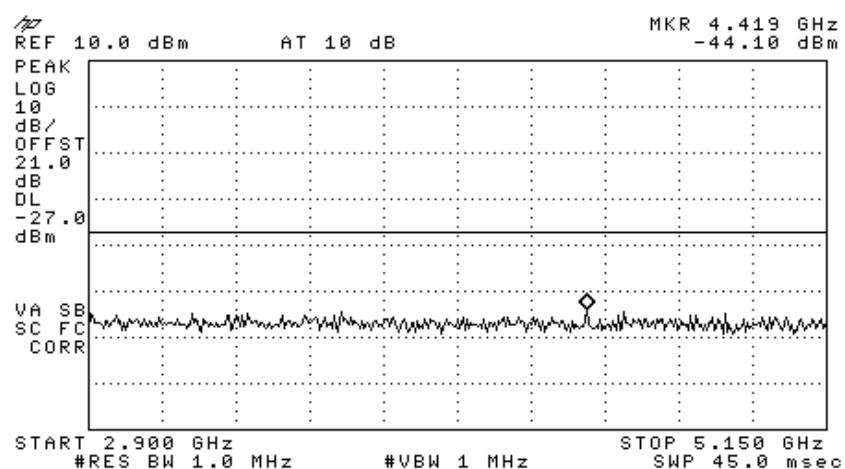


Figure 135 —5240 MHz BPSK

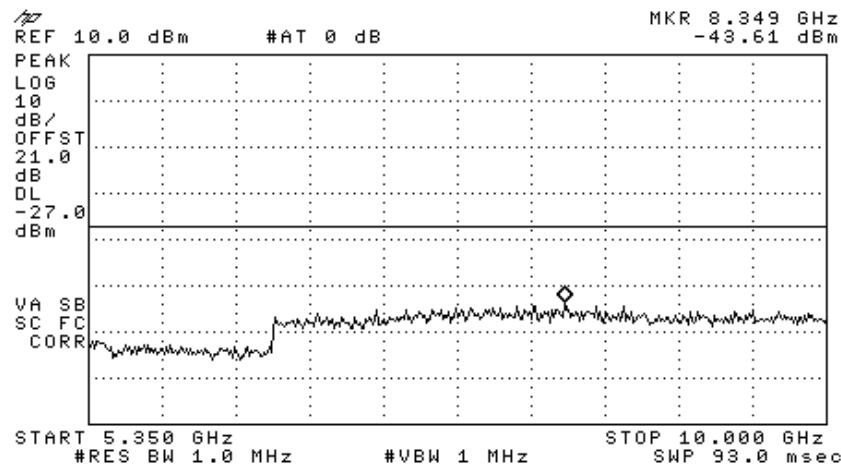


Figure 136 —5240 MHz BPSK

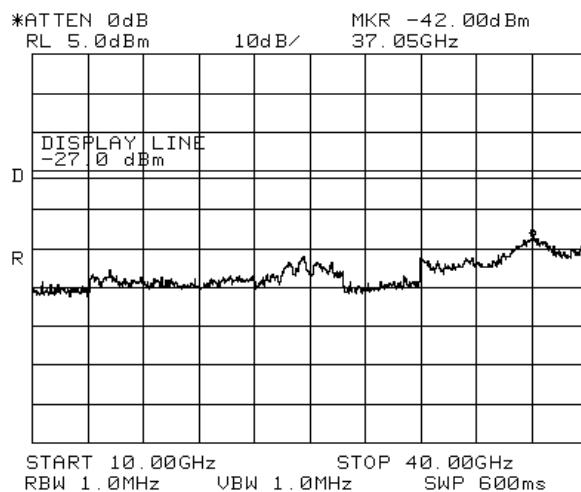


Figure 137 —5240 MHz BPSK

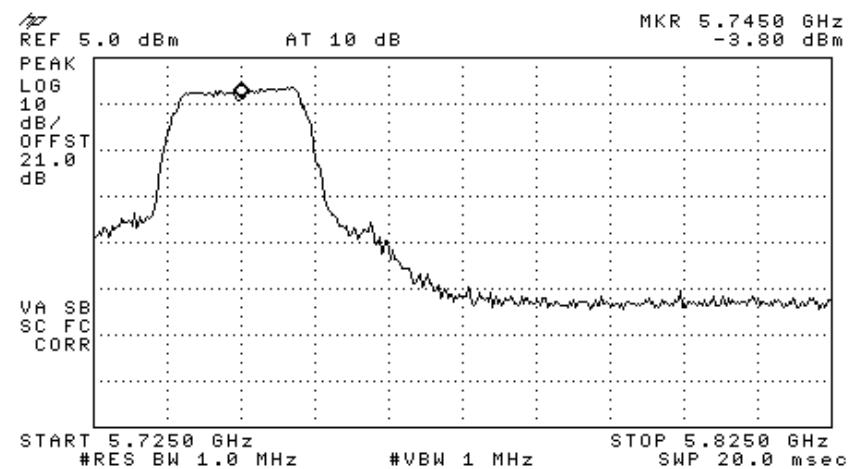


Figure 138 —5745 MHz BPSK

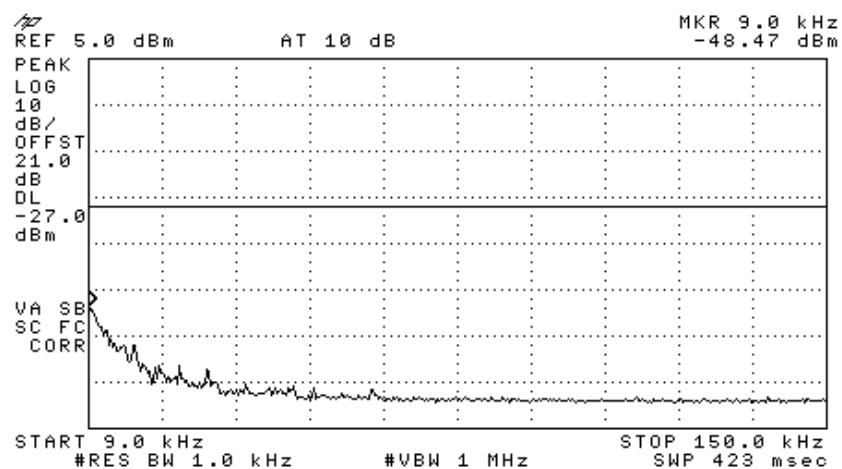


Figure 139 —5745 MHz BPSK

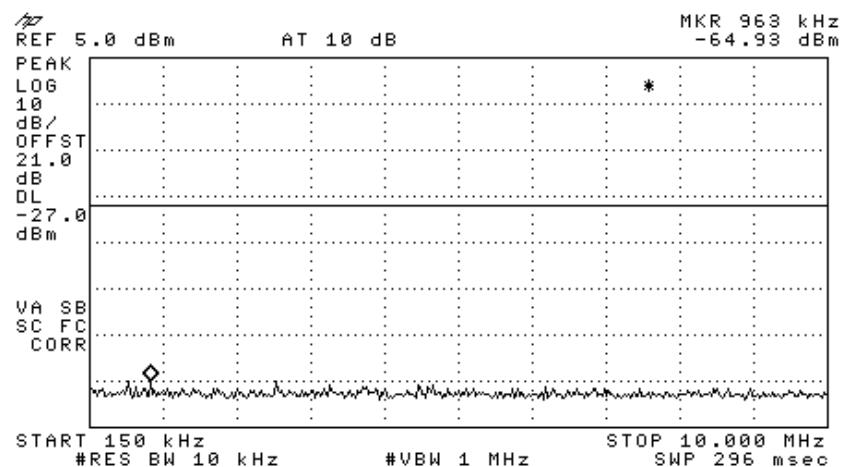


Figure 140 —5745 MHz BPSK

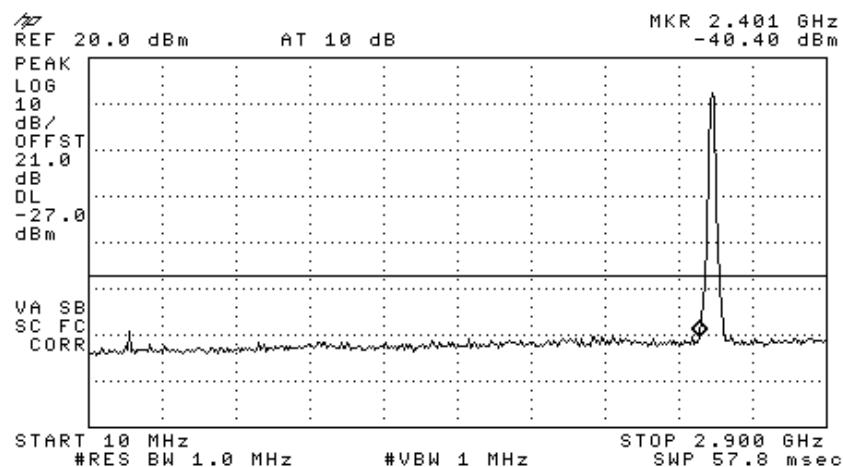


Figure 141 —5745 MHz BPSK

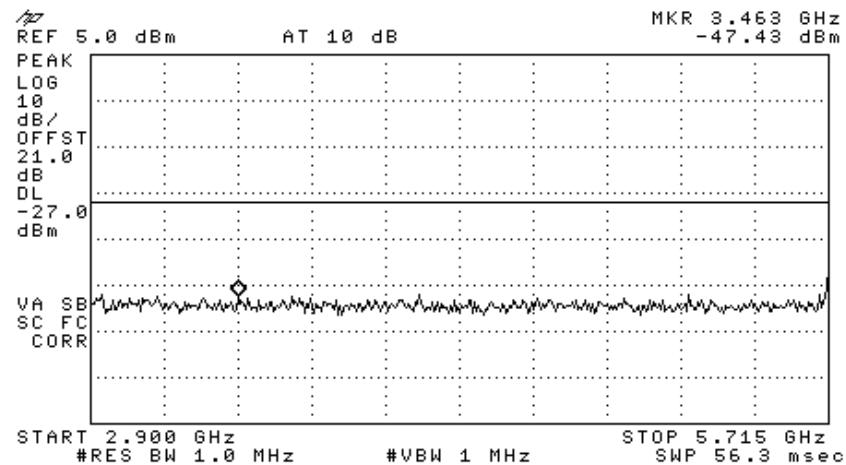


Figure 142 —5745 MHz BPSK

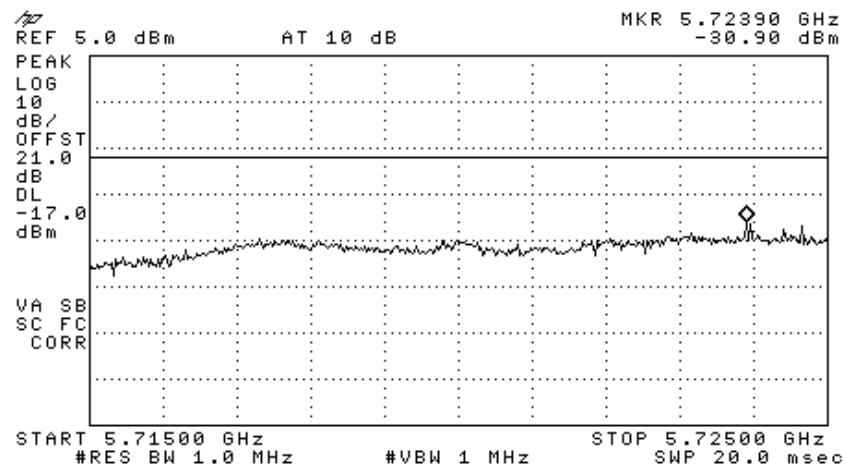


Figure 143 —5745 MHz BPSK

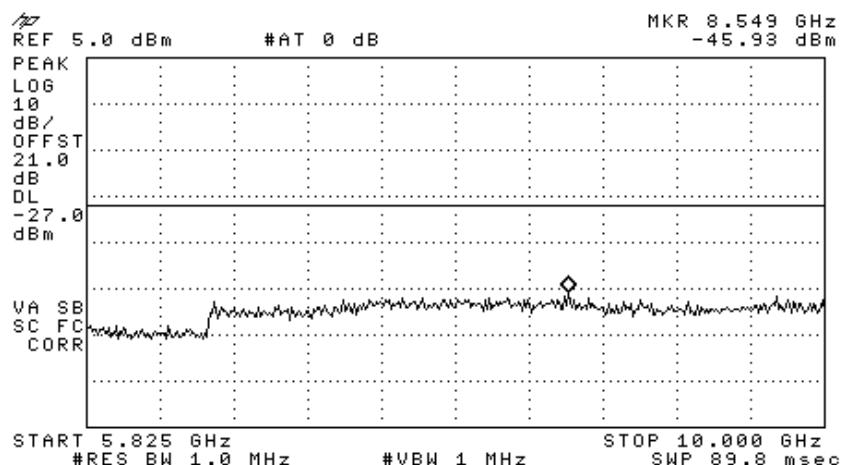


Figure 144 —5745 MHz BPSK

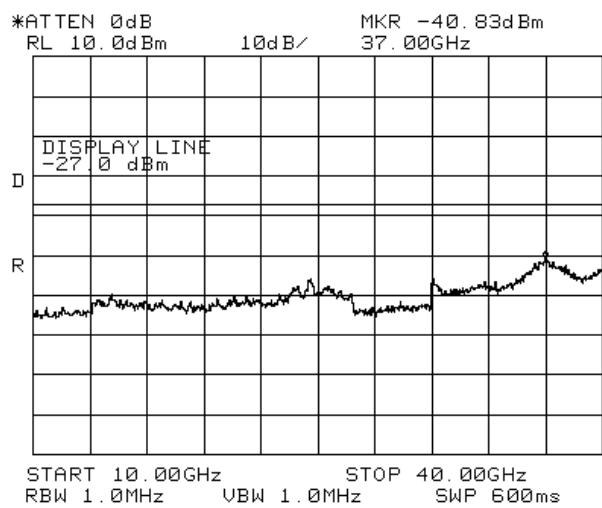


Figure 145 —5745 MHz BPSK

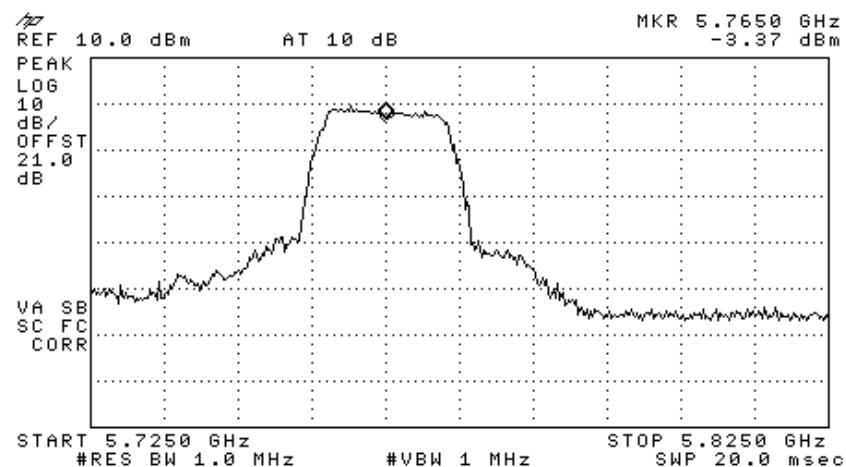


Figure 146 —5765 MHz BPSK

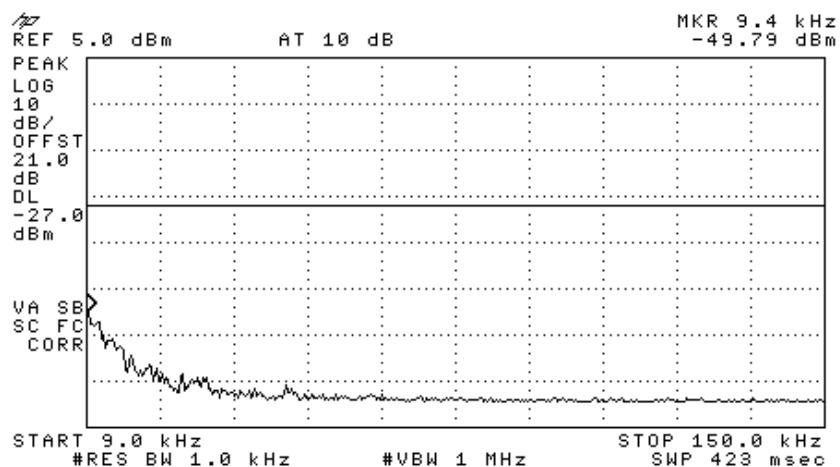


Figure 147 —5765 MHz BPSK

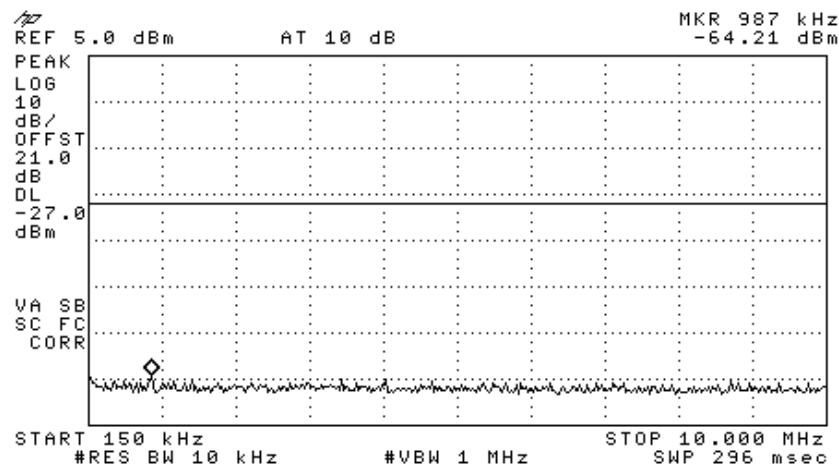


Figure 148 —5765 MHz BPSK

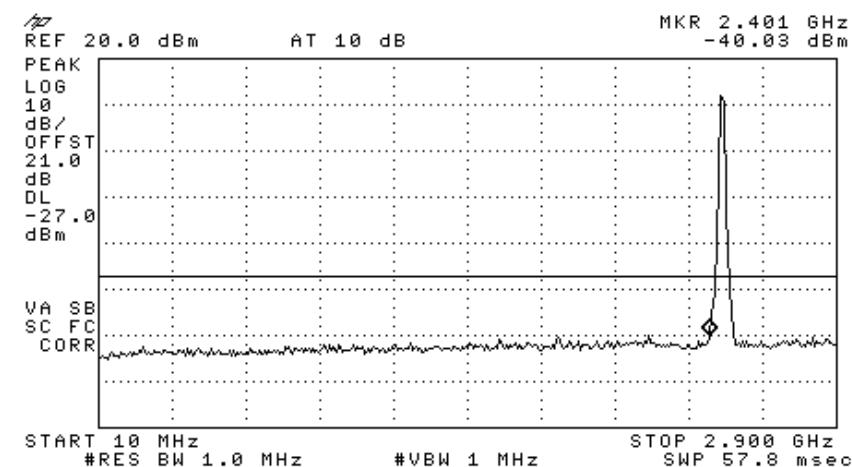


Figure 149 —5765 MHz BPSK

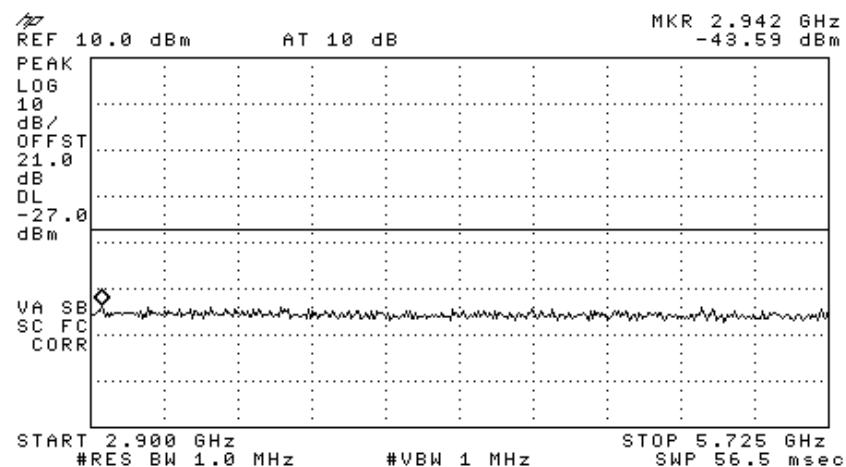


Figure 150 —5765 MHz BPSK

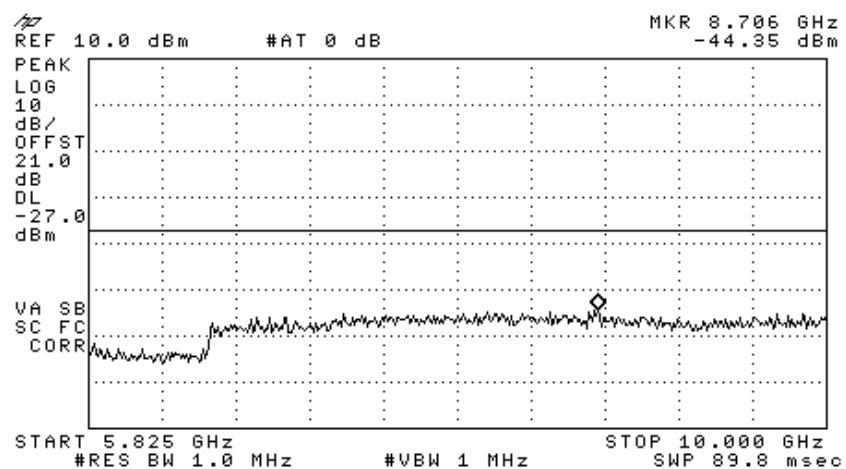


Figure 151 —5765 MHz BPSK

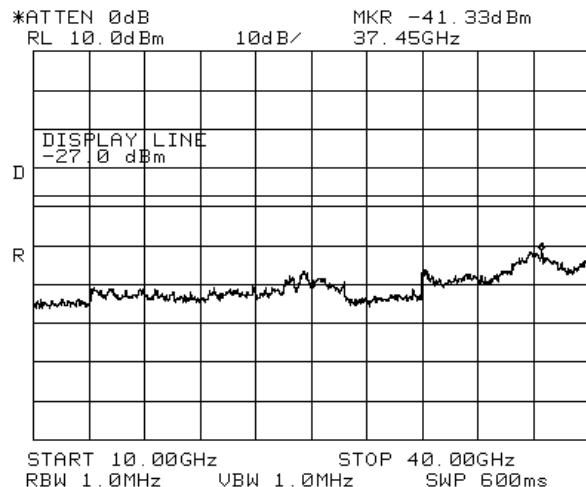


Figure 152 —5765 MHz BPSK

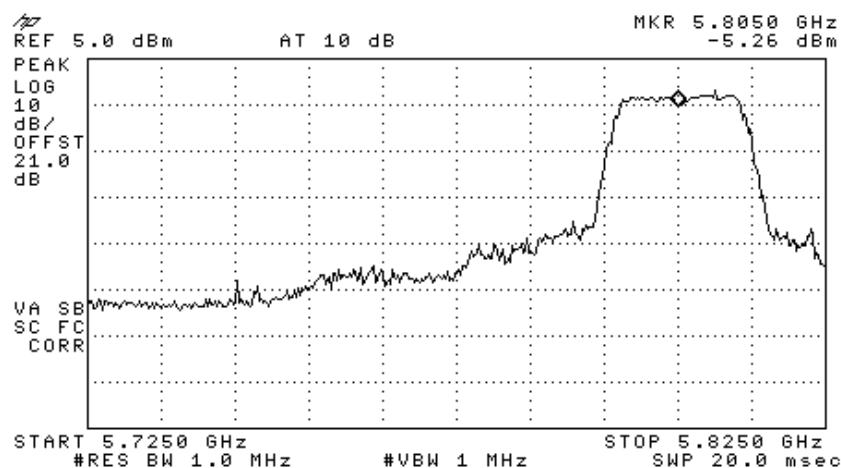


Figure 153 —5805 MHz BPSK

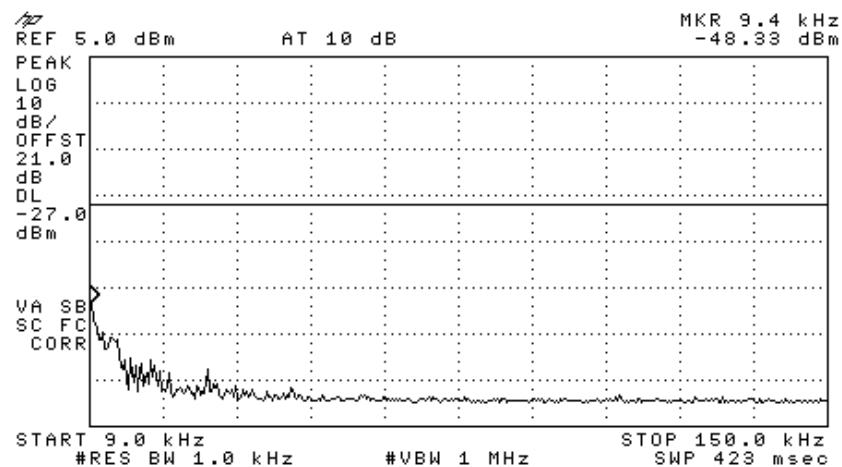


Figure 154 —5805 MHz BPSK

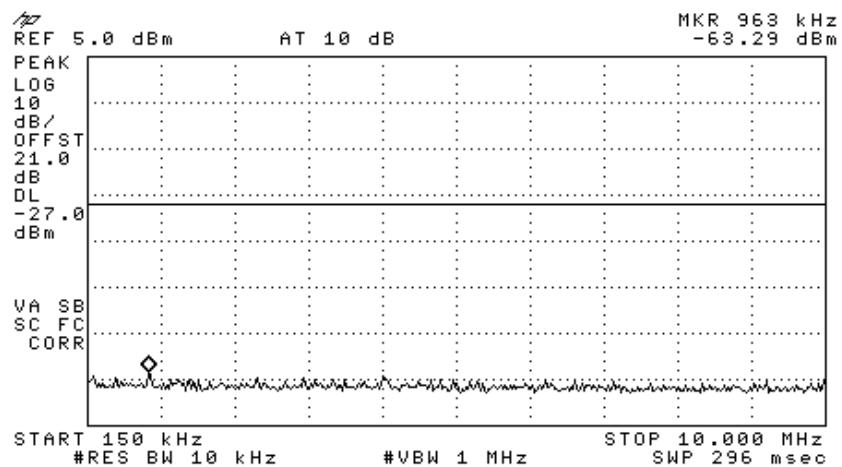


Figure 155 —5805 MHz BPSK

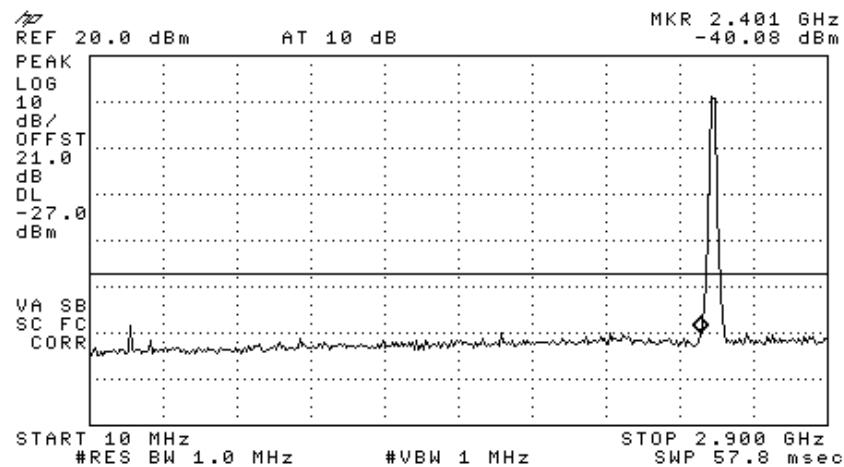


Figure 156 —5805 MHz BPSK

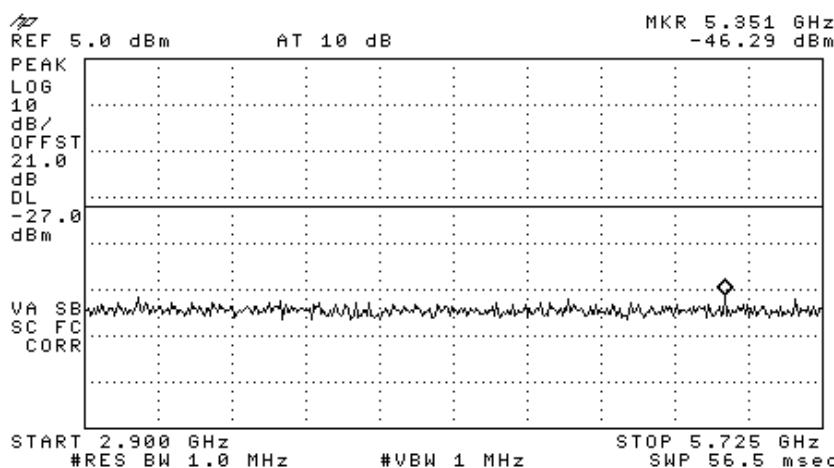


Figure 157 —5805 MHz BPSK

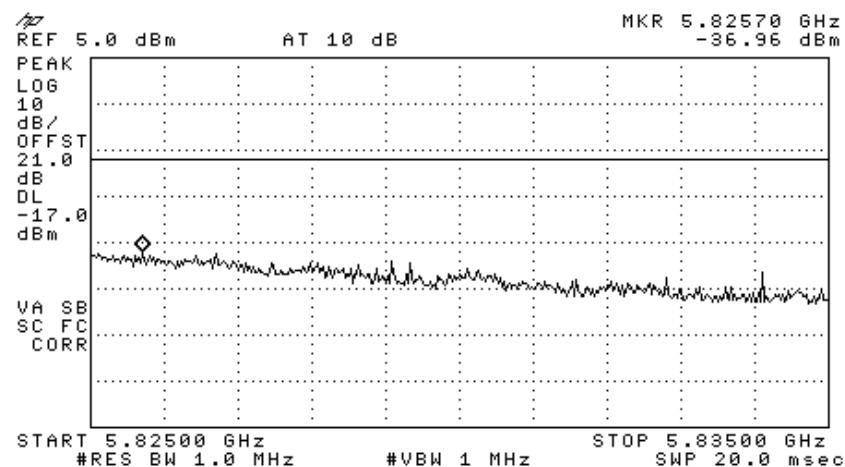


Figure 158 —5805 MHz BPSK

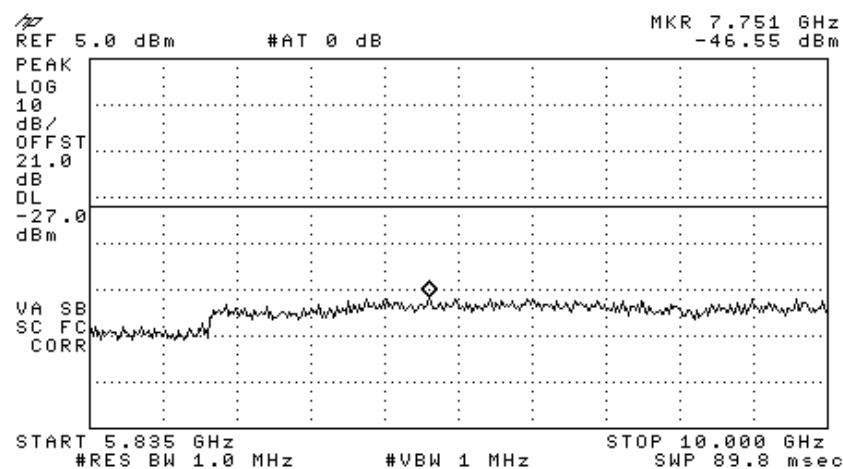


Figure 159 —5805 MHz BPSK

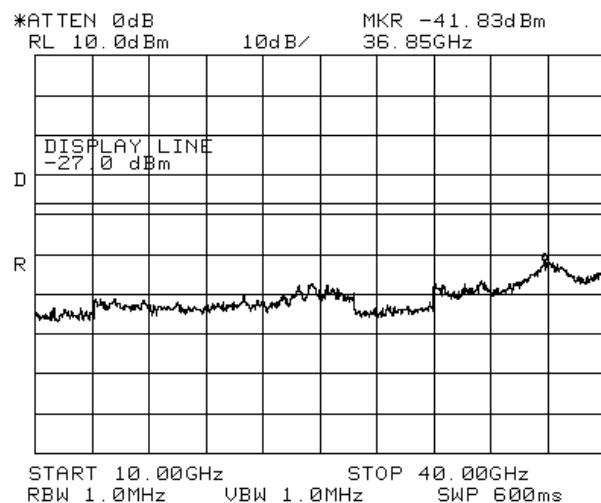


Figure 160 — 5805 MHz BPSK

10.2 Results table

E.U.T Description: WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points

Model No.: 860M With WCE

Serial Number: 1. 860M: 73903D 2. WCE: 739038

Specification: F.C.C. Part 15, Subpart E

Operation Frequency (MHz)	Modulation	Reading (dBm)	Specification (dBm)	Margin (dB)
5180	64QAM	-41.17	-27.0	-14.17
	BPSK	-40.63	-27.0	-13.63
5200	64QAM	-40.71	-27.0	-13.71
	BPSK	-40.63	-27.0	-13.63
5240	64QAM	-41.32	-27.0	-14.32
	BPSK	-41.88	-27.0	-14.88
5745	64QAM	-40.12	-27.0	-13.12
	BPSK	-40.40	-27.0	-13.40
5765	64QAM	-41.41	-27.0	-14.41
	BPSK	-40.03	-27.0	-13.03
5805	64QAM	-30.27	-17.0	-13.27
	BPSK	-40.08	-27	-13.08

Figure 161 Peak Power Output of 5150-5250; 5725-5825 MHz Bands

JUDGEMENT: Passed by 13.03 dB

TEST PERSONNEL:

Tester Signature: E. Pitt Date: 28.02.08

Typed/Printed Name: E. Pitt

10.3 **Test Equipment Used.**

Peak Power Output of 5150-5825 MHz Band

Instrument	Manufacturer	Model	Serial/Part Number	Calibration	
				Last Calibr.	Period
Spectrum Analyzer	HP	8592L	3826A01204	February 22, 2007	1 year
Spectrum Analyzer	HP	8564E	3442A00275	November 14, 2007	1 year
Attenuator	Jyebao	-	FAT-AM5AF5G6G2W20	May 9, 2007	1 year
Cable	Rhophase	KPS-5000-KPS	A1674	February 8, 2008	1 year

Figure 162 Test Equipment Used

11. Band Edge Spectrum 5GHz Transmitter 802.11b/g+802.11a Signals

[In Accordance with section 15.407)

11.1 Test procedure

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator (20 dB) and an appropriate coaxial cable (cable loss = 1 dB). The spectrum analyzer was set to 1 MHz resolution BW. Maximum power level below 5150 MHz and above 5350 MHz was measured at 5180 MHz and 5240MHz correspondingly. Maximum power level below 5725 MHz and above 5825 MHz was measured at 5745 MHz and 5805 MHz correspondingly.

The E.U.T. was tested at 5180, 5240, 5745, and 5805 MHz with the following modulations: 64QAM (54Mbit/sec) and BPSK (6Mbit/sec).

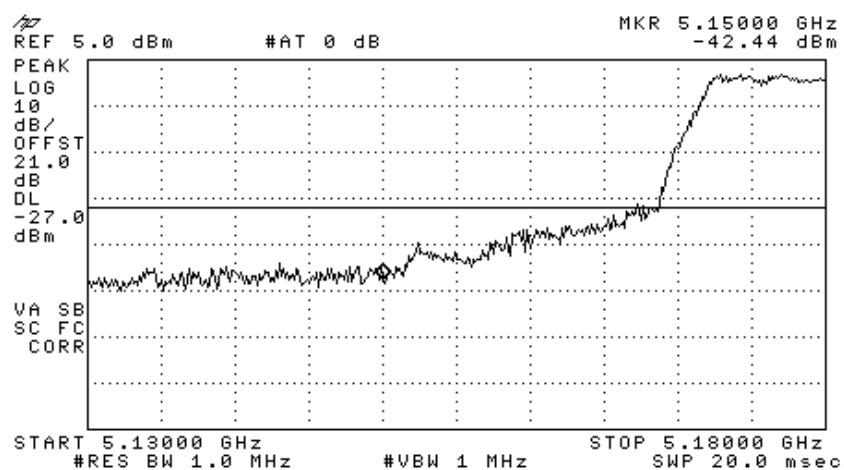


Figure 163 —5180 MHz 64QAM

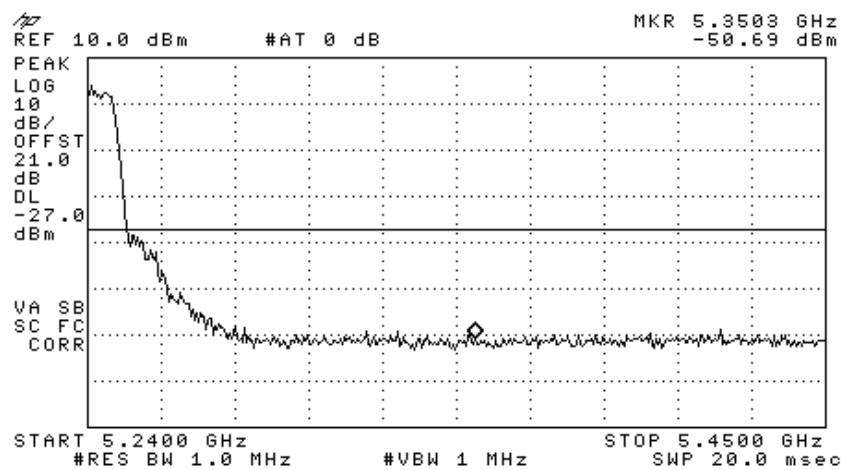


Figure 164 —5240 MHz 64QAM

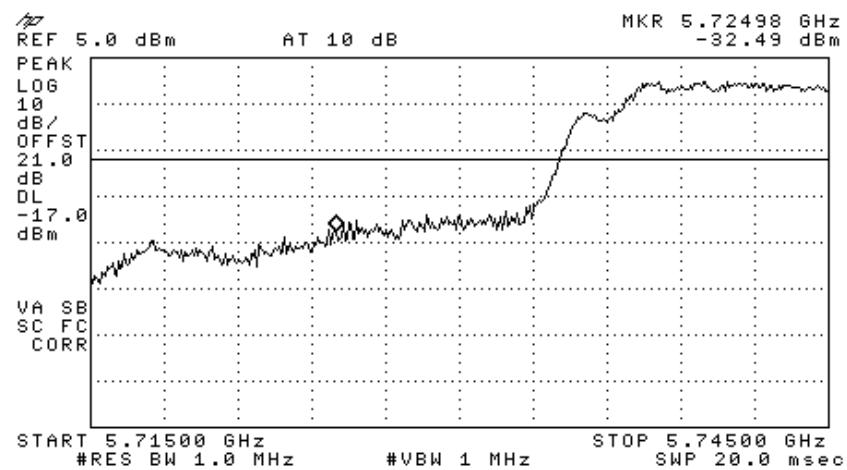


Figure 165 —5745 MHz 64QAM

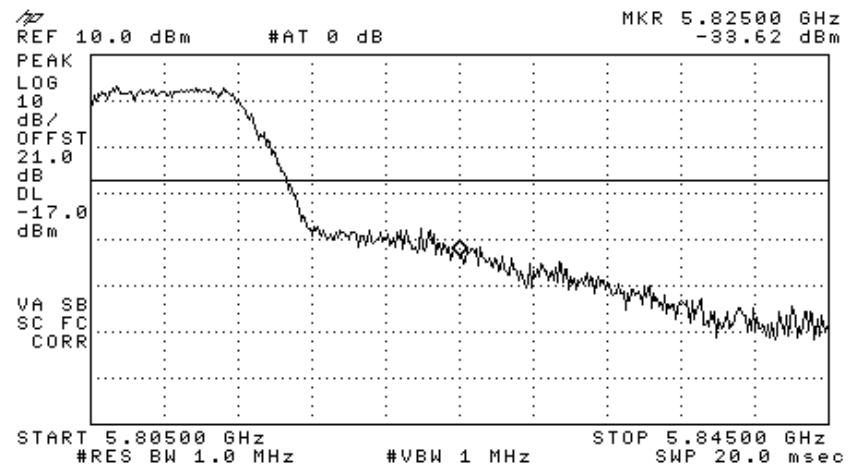


Figure 166 —5805 MHz 64QAM

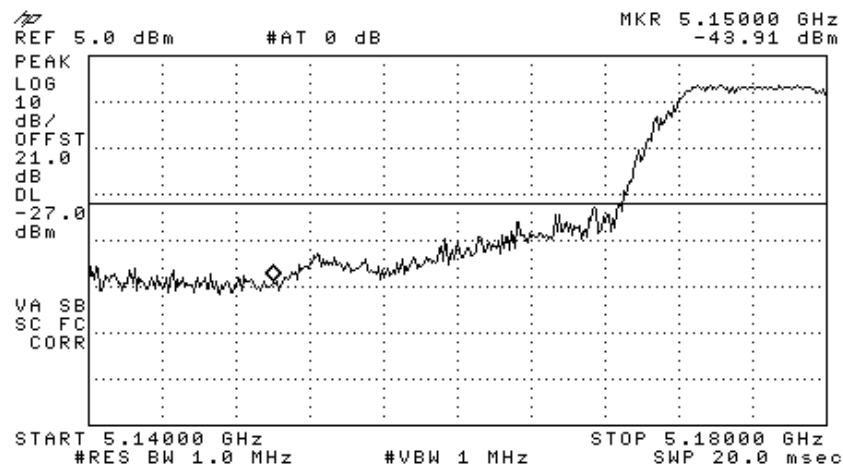


Figure 167 —5180 MHz BPSK

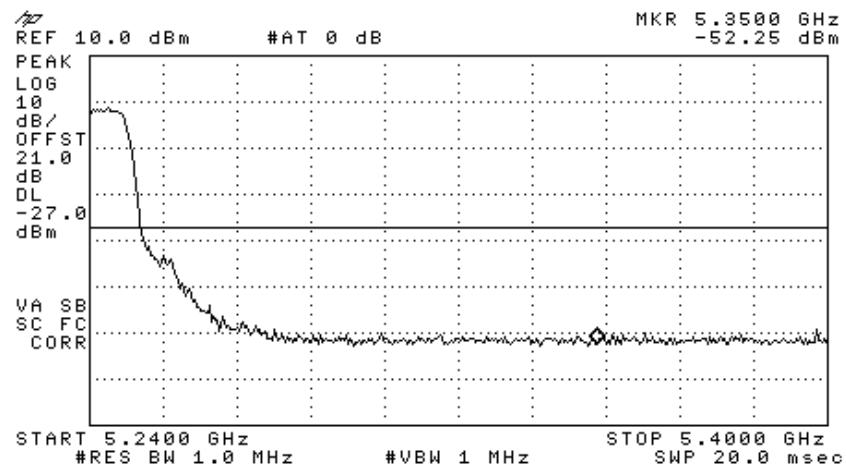


Figure 168 —5240 MHz BPSK

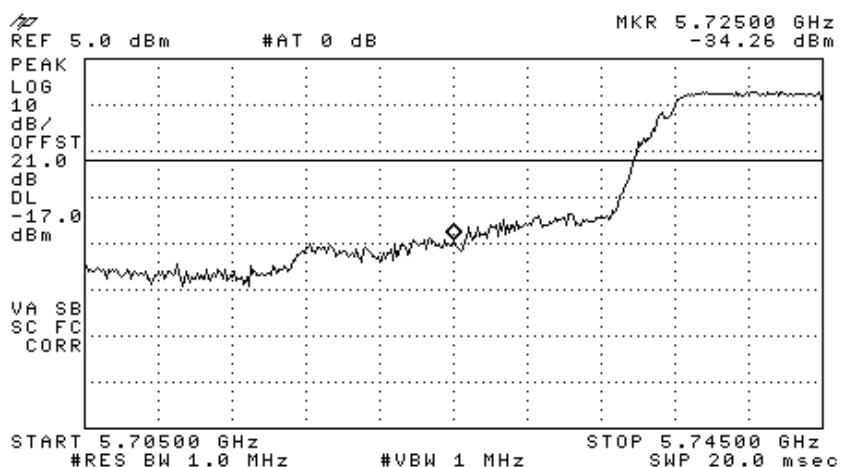


Figure 169 —5745 MHz BPSK

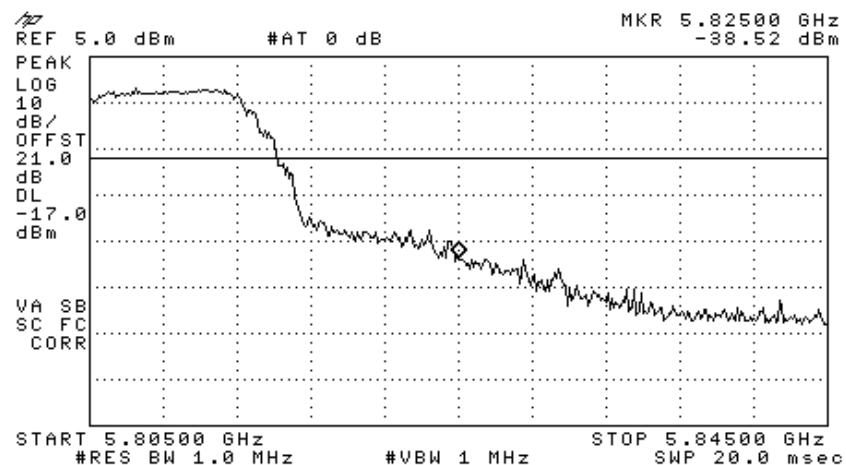


Figure 170 —5805 MHz BPSK

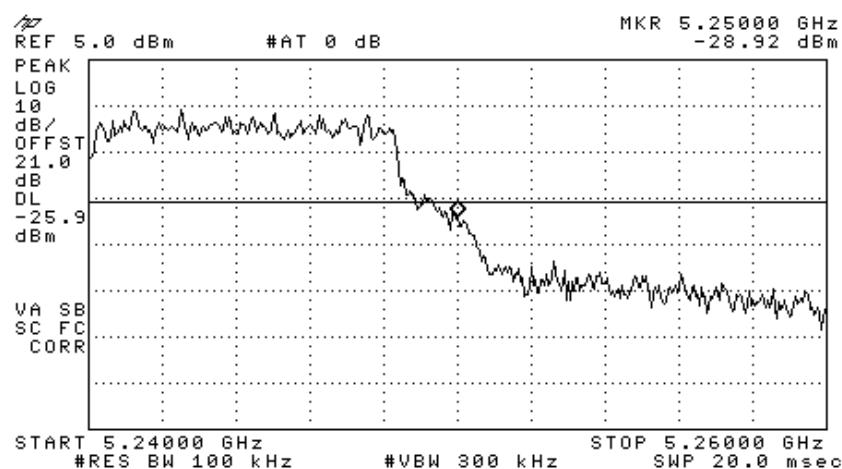


Figure 171 —Band Edge at 5.25 GHz Operation at 5.24 GHz 64QAM (Section 15.215(c))

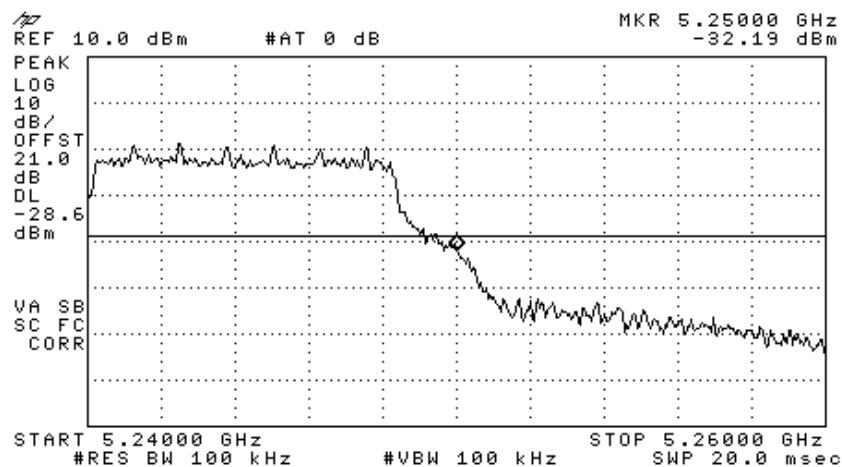


Figure 172 —Band Edge at 5.25 GHz Operation at 5.24 GHz BPSK (Section 15.215(c))

11.2 Results table

E.U.T. Description: WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points

Model No.: 860M With WCE

Serial Number: 1. 860M: 73903D 2. WCE: 739038

Specification: F.C.C. Part 15, Subpart C (15.215(c))

Operation Frequency (MHz)	Modulation	Band Edge Frequency (MHz)	Result (dBc)	Specification (dBc)	Margin (dB)
5240	64QAM	5250	23.0	20.0	-3.0
	BPSK	5250	23.6	20.0	-3.6

Figure 173 Band Edge at 5.25 GHz operation at 5.24 GHz

JUDGEMENT: Passed by 3.0 dB

TEST PERSONNEL:

Tester Signature: E. Pitt

Date: 28.02.08

Typed/Printed Name: E. Pitt

11.3 Results table

E.U.T. Description: WLAN Module With WCE (WiFi Coverage Extender) for DAS
With 4 Meru AP200 Access Points

Model No.: 860M With WCE

Serial Number: 1. 860M: 73903D 2. WCE: 739038

Specification: F.C.C. Part 15, Subpart C (15.407)

Operation Frequency (MHz)	Modulation	Band Edge Frequency (MHz)	Result (dBm)	Specification (dBm)	Margin (dB)
5180	64QAM	5150	-42.44	-27.0	-15.44
	BPSK	5150	-43.91	-27.0	-16.91
5240	64QAM	5350	-50.69	-27.0	-23.69
	BPSK	5350	-52.25	-27.0	-25.25
5725	64QAM	5725	-32.49	-17.0	-15.49
	BPSK	5725	-34.26	-17.0	-17.26
5825	64QAM	5825	-33.62	-17.0	-16.62
	BPSK	5825	-38.52	-17.0	-21.52

Figure 174 Band Edge Spectrum

JUDGEMENT: Passed by 15.44 dB

TEST PERSONNEL:

Tester Signature: Pitt Date: 28.02.08

Typed/Printed Name: E. Pitt

11.4 **Test Equipment Used.**

Band edge Spectrum

Instrument	Manufacturer	Model	Serial/Part Number	Calibration	
				Last Calibr.	Period
Spectrum Analyzer	HP	8592L	3826A01204	February 22, 2007	1 year
Attenuator	Jyebao	-	FAT-AM5AF5G6G2W20	May 9, 2007	1 year
Cable	Rhophase	KPS-5000-KPS	A1674	February 8, 2008	1 year

Figure 175 Test Equipment Used



12. Antenna Gain 5GHz Transmitter 802.11b/g+802.11a Signals

The antenna gain is 7 dBi.

13. R.F Exposure/Safety 5GHz Transmitter 802.11b/g+802.11a Signals

Typical use of the E.U.T. is repeating WiFi signals for DAS. The typical placement of the E.U.T. is on a wall near the ceiling. The typical distance between the E.U.T. and the user in the worst case application, is >1 m.

Calculation of Maximum Permissible Exposure (MPE)

Based on Section 1.1307(b)(1) Requirements

(a) FCC limits at 5745 MHz is: $1 \frac{mW}{cm^2}$

Using table 1 of Section 1.1310 limit for general population/uncontrolled exposures, the above level is an average over 30 minutes.

(b) The power density produced by the E.U.T. is

$$S = \frac{P_t G_t}{4\pi R^2}$$

P_t - Transmitted Power (Peak) 20 mW= 13 dBm

G_t - Antenna Gain, 7 dBi = 5

R- Distance from Transmitter using 1 m worst case

(c) The peak power density is :

$$S_p = \frac{20 \times 5}{4\pi(100)^2} = 0.8 \times 10^{-3} \frac{mW}{cm^2}$$

(d) The duty cycle of transmission in actual worst case is 50%.

The average power source is:

10mW

(e) The averaged power density of the E.U.T. is:

$$S_{AV} = 0.4 \times 10^{-3} \frac{mW}{cm^2}$$

(f) This is 3 orders of magnitude below the FCC limit.

14. Radiated Emission Per FCC Part 15 Sub-Part B Test Data 802.11b/g+802.11a Signals

14.1 ***Test Specification***

30-40000 MHz, FCC Part 15, Subpart B, CLASS B

14.2 ***Test Procedure***

The E.U.T. operation mode and test set-up are as described in Section 4.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The effect of varying the position of the cables was investigated to find the configuration that produces maximum emission.

The frequency range 30-40000 MHz was scanned, and the list of the highest emissions was verified and updated accordingly.

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 2.9 - 40 GHz, a spectrum analyzer including a low noise amplifier was used. The test distance was 3 meters. During peak measurements, the I.F. bandwidth was 1 MHz, and video bandwidth 3 MHz. During average measurements, the I.F. bandwidth was 1 MHz and video bandwidth was 100 Hz.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization. Verification of the E.U.T emissions was based on the following methods: turning the E.U.T on and off; using a frequency span less than 10 MHz; observation of the signal level during turntable rotation. (Background noise is not affected by the rotation of the E.U.T.)

The emissions were measured at a distance of 3 meters.

The E.U.T. was tested in both Rx and Tx modes.

The E.U.T. was tested at the operating frequencies of, 5180, 5200, 5240, 5745, 5765, and 5805 MHz using the following modulations: 64QAM, and BPSK.

14.3 **Test Data**

JUDGEMENT: Passed by 0.3 dB.

The margin between the emission level and the specification limit is 0.3 dB in the worst case at the frequency of 396.03 MHz, horizontal polarization.

The signals in the band 1.0 – 40.0 GHz were more than 20 dB below the specification limit.

The EUT met the requirements of the F.C.C. Part 15, Subpart B, Class B, specification.

The results for all three operating frequencies and modulations were the same.

TEST PERSONNEL:

Tester Signature:  Date: 02.03.08

Typed/Printed Name: A. Sharabi

Radiated Emission

E.U.T Description WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points
 Type 860M With WCE
 Serial Number: 1. 860M: 73903D
 2. WCE: 739038

Specification: FCC Part 15, Subpart B, Class B

Antenna Polarization: Horizontal Frequency range: 30 MHz to 1000 MHz
 Antenna: 3 meters distance Detectors: Peak, Quasi-peak

Signal Number	Frequency (MHz)	Peak dBuV/m	QP dBuV/m	QP Delta L 1 (dB)	Avg dBuV/m	Av Delta L 2 (dB)	Corr (dB)
1	66.248650	26.1	23.2	-16.8			-2.5
2	250.004650	44.8	41.8	-4.2			20.3
3	264.010850	43.5	39.8	-6.2			21.0
4	264.017200	43.7	40.3	-5.7			21.0
5	396.012500	48.1	45.7	-0.3			18.9
6	499.896550	54.5	27.6	-18.4			20.4

Figure 176. Radiated Emission. Antenna Polarization: HORIZONTAL. Detectors: Peak, Quasi-peak

Note: QP Delta refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.


Radiated Emission

E.U.T Description	WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points
Type	860M With WCE
Serial Number:	1. 860M: 73903D 2. WCE: 739038

Specification: FCC Part 15, Subpart B, Class B

Antenna Polarization: Horizontal
Antenna: 3 meters distance

Frequency range: 30 MHz to 1000 MHz
Detectors: Peak, Quasi-peak

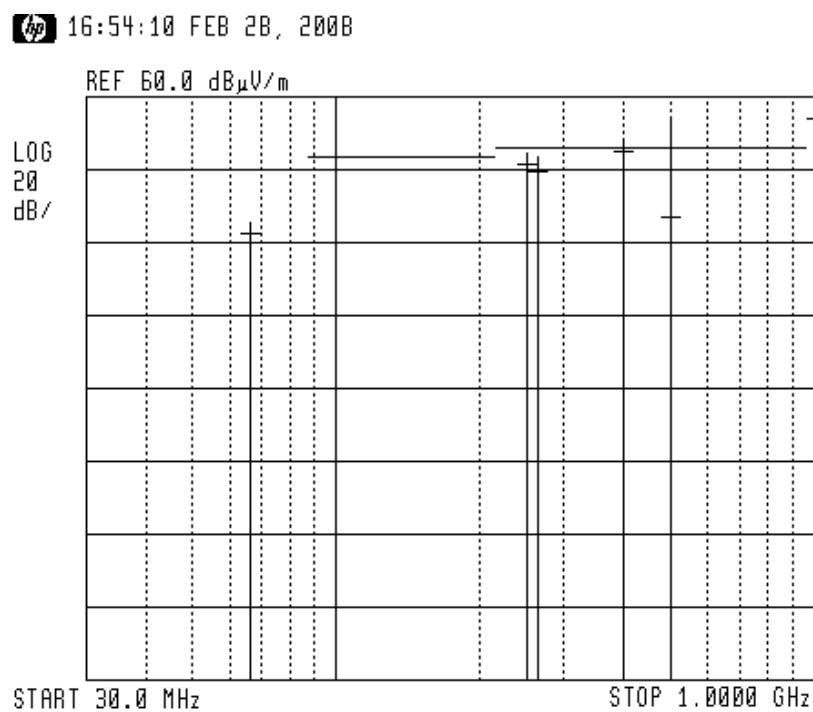

**Figure 177. Radiated Emission. Antenna Polarization: HORIZONTAL
Detectors: Peak, Quasi-peak**

Note:

1. Horizontal axis shows logarithmic frequency scale.
2. The vertical axis shows amplitude (in dB μ V/m).
3. Peak detection is designated by the top of each vertical line.
4. Quasi-peak detection is designated by the first dash mark (from the top) of each vertical line.

Radiated Emission

E.U.T Description WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points
 Type 860M With WCE
 Serial Number: 1. 860M: 73903D
 2. WCE: 739038

Specification: FCC Part 15, Subpart B, Class B

Antenna Polarization: Vertical
 Antenna: 3 meters distance

Frequency range: 30 MHz to 1000 MHz
 Detectors: Peak, Quasi-peak

Signal Number	Frequency (MHz)	Peak dBuV/m	QP dBuV/m	QP Delta L 1 (dB)	Avg dBuV/m	Av Delta L 2 (dB)	Corr (dB)
1	132.000055	31.4	28.7	-14.8			6.1
2	232.600000	42.7	38.2	-7.8			18.8
3	264.000000	42.5	39.0	-6.9			21.0
4	396.019850	47.5	43.3	-2.7			18.9
5	498.360850	50.4	35.5	-10.5			20.4
6	500.012100	49.0	40.7	-5.3			20.4

Figure 178. Radiated Emission. Antenna Polarization: VERTICAL. Detectors: Peak, Quasi-peak

Note: QP Delta refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.


Radiated Emission

E.U.T Description	WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points
Type	860M With WCE
Serial Number:	1. 860M: 73903D 2. WCE: 739038

Specification: FCC Part 15, Subpart B, Class B

Antenna Polarization: Vertical
Antenna: 3 meters distance

Frequency range: 30 MHz to 1000 MHz
Detectors: Peak, Quasi-peak

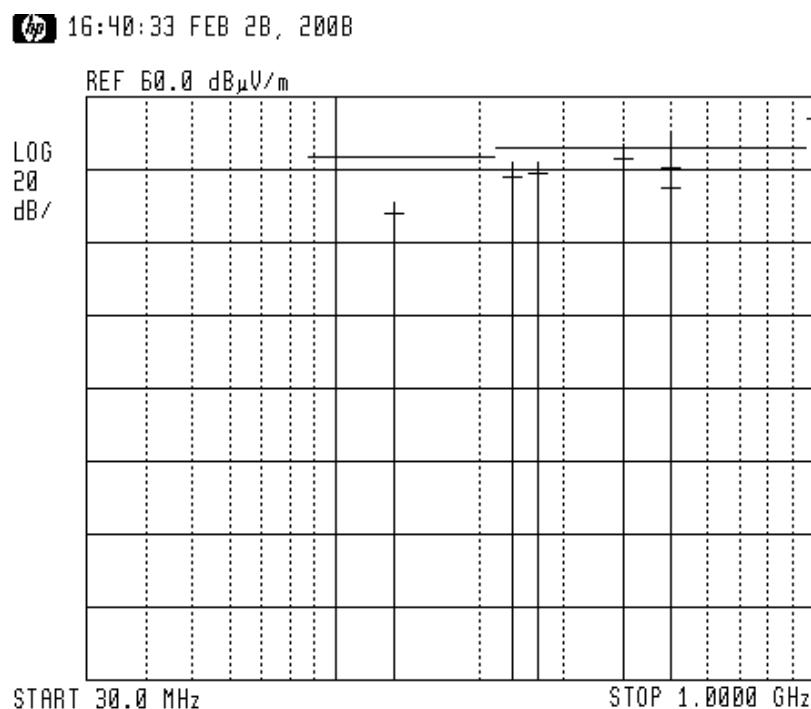

**Figure 179. Radiated Emission. Antenna Polarization: VERTICAL.
Detectors: Peak, Quasi-peak**

Note:

1. Horizontal axis shows logarithmic frequency scale.
2. The vertical axis shows amplitude (in dB μ V/m).
3. Peak detection is designated by the top of each vertical line.
4. Quasi-peak detection is designated by the first dash mark (from the top) of each vertical line.

14.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial No.	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 12, 2007	1 Year
RF Filter Section	HP	85420E	3705A00248	November 12, 2007	1 Year
Antenna Biconical	ARA	BCD 235/B	1041	March 22, 2007	1 Year
Antenna Log Periodic	ARA	LPD-2010/A	1038	November 22, 2007	1 Year
Antenna Log Periodic	A.H. Systems	SAS-200/511	253	February 4, 2007	2 Years
Double Ridged Waveguide Horn Antenna	EMCO	3115	29845	March 15, 2006	2 Years
Horn Antenna	ARA	SWH-28	1008	December 8, 2006	2 Years
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS-0411N313	013	November 2, 2007	1 Year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	January 9, 2007	1 Year
Low Noise Amplifier	MK Milliwave	MKT6-3000 4000-30-13P	399	January 9, 2007	1 Year
Spectrum Analyzer	HP	8593EM	3536A00120	February 26, 2008	1 Year
Spectrum Analyzer	HP	8564E	3442A00275	November 14, 2007	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKG19982	N/A	N/A



14.5 **Field Strength Calculation**

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$FS = RA + AF + CF$$

FS: Field Strength [dB μ v/m]

RA: Receiver Amplitude [dB μ v]

AF: Receiving Antenna Correction Factor [dB/m]

CF: Cable Attenuation Factor [dB]

No external pre-amplifiers are used.

15. Spurious Radiated Emission in the Restricted Band, Below 1 GHz 5GHz Transmitter 802.11b/g+802.11a + CELL + PCS Signals

15.1 ***Test Specification***

9kHz-1000 MHz, F.C.C., Part 15, Subpart C

15.2 ***Test Procedure***

The E.U.T. operation mode and test set-up are as described in Section 3.

See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 3.1.

The frequency range 9 kHz-1000 MHz was scanned, and the list of the highest emissions was verified and updated accordingly.

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 9 kHz-30 MHz, the loop antenna was rotated on its vertical axis, The antenna height (center of loop) was 1 meter.

In the frequency range 30-1000 MHz, the readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

Verification of the E.U.T emissions was based on the following methods:

Turning the E.U.T on and off.

Using a frequency span less than 10 MHz.

Observation of the signal level during turntable rotation. Background noise is not affected by the rotation of the E.U.T.

The E.U.T. was tested at the operating frequencies of, 5180, 5200, 5240, 5745, 5765, and 5805 MHz using the following modulations:,64QAM, and BPSK.



15.3 **Test Data**

JUDGEMENT: Passed by 0.3 dB.

The margin between the emission level and the specification limit is 0.3 dB in the worst case at the frequency of 396.03 MHz, horizontal polarization.

The EUT met the requirements of the F.C.C. Part 15, Subpart C, specification.

The results for all three operating frequencies and modulations were the same.

TEST PERSONNEL:

Tester Signature:  Date: 02.03.08

Typed/Printed Name: A. Sharabi

Radiated Emission

E.U.T Description WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points
 Type 860M With WCE
 Serial Number: 1. 860M: 73903D
 2. WCE: 739038

Specification: FCC Part 15, Subpart C

Antenna Polarization: Horizontal Frequency range: 30 MHz to 1000 MHz
 Antenna: 3 meters distance Detectors: Peak, Quasi-peak

Signal Number	Frequency (MHz)	Peak dBuV/m	QP dBuV/m	QP Delta L 1 (dB)	Avg dBuV/m	Av Delta L 2 (dB)	Corr (dB)
1	66.248650	26.1	23.2	-16.8			-2.5
2	250.004650	44.8	41.8	-4.2			20.3
3	264.010850	43.5	39.8	-6.2			21.0
4	264.017200	43.7	40.3	-5.7			21.0
5	396.012500	48.1	45.7	-0.3			18.9
6	499.896550	54.5	27.6	-18.4			20.4

Figure 180. Radiated Emission. Antenna Polarization: HORIZONTAL. Detectors: Peak, Quasi-peak

Note: QP Delta refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.


Radiated Emission

E.U.T Description	WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points
Type	860M With WCE
Serial Number:	1. 860M: 73903D 2. WCE: 739038

Specification: FCC Part 15, Subpart C

Antenna Polarization: Horizontal
Antenna: 3 meters distance

Frequency range: 30 MHz to 1000 MHz
Detectors: Peak, Quasi-peak

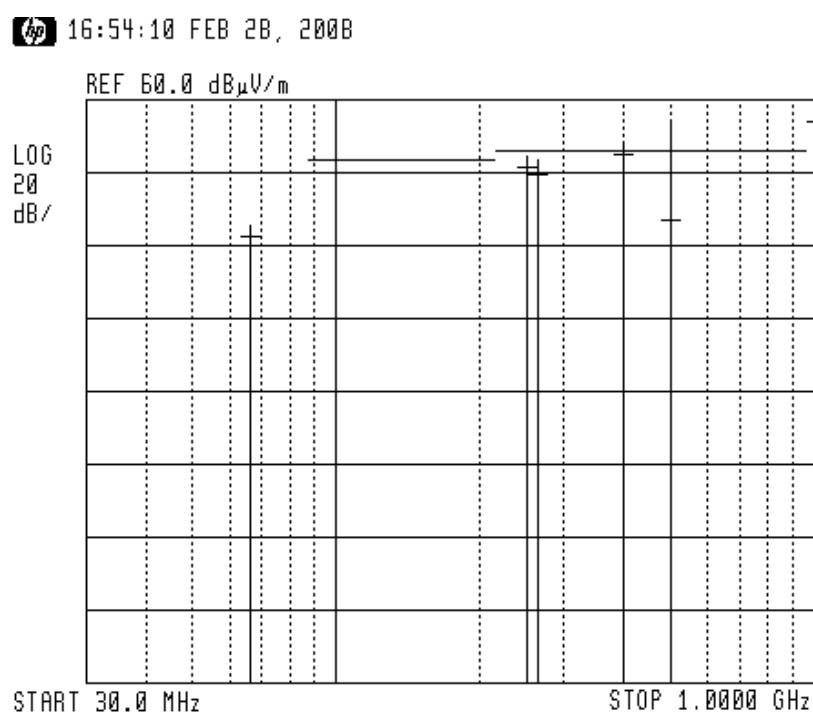

**Figure 181. Radiated Emission. Antenna Polarization: HORIZONTAL
Detectors: Peak, Quasi-peak**

Note:

1. Horizontal axis shows logarithmic frequency scale.
2. The vertical axis shows amplitude (in dB μ V/m).
3. Peak detection is designated by the top of each vertical line.
4. Quasi-peak detection is designated by the first dash mark (from the top) of each vertical line.

Radiated Emission

E.U.T Description WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points
 Type 860M With WCE
 Serial Number: 1. 860M: 73903D
 2. WCE: 739038

Specification: FCC Part 15, Subpart C

Antenna Polarization: Vertical
 Antenna: 3 meters distance

Frequency range: 30 MHz to 1000 MHz
 Detectors: Peak, Quasi-peak

Signal Number	Frequency (MHz)	Peak dBuV/m	QP dBuV/m	QP Delta L 1 (dB)	Avg dBuV/m	Av Delta L 2 (dB)	Corr (dB)
1	132.000055	31.4	28.7	-14.8			6.1
2	232.600000	42.7	38.2	-7.8			18.8
3	264.000000	42.5	39.0	-6.9			21.0
4	396.019850	47.5	43.3	-2.7			18.9
5	498.360850	50.4	35.5	-10.5			20.4
6	500.012100	49.0	40.7	-5.3			20.4

Figure 182. Radiated Emission. Antenna Polarization: VERTICAL. Detectors: Peak, Quasi-peak

Note: QP Delta refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.


Radiated Emission

E.U.T Description	WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points
Type	860M With WCE
Serial Number:	1. 860M: 73903D 2. WCE: 739038

Specification: FCC Part 15, Subpart C

Antenna Polarization: Vertical
Antenna: 3 meters distance

Frequency range: 30 MHz to 1000 MHz
Detectors: Peak, Quasi-peak

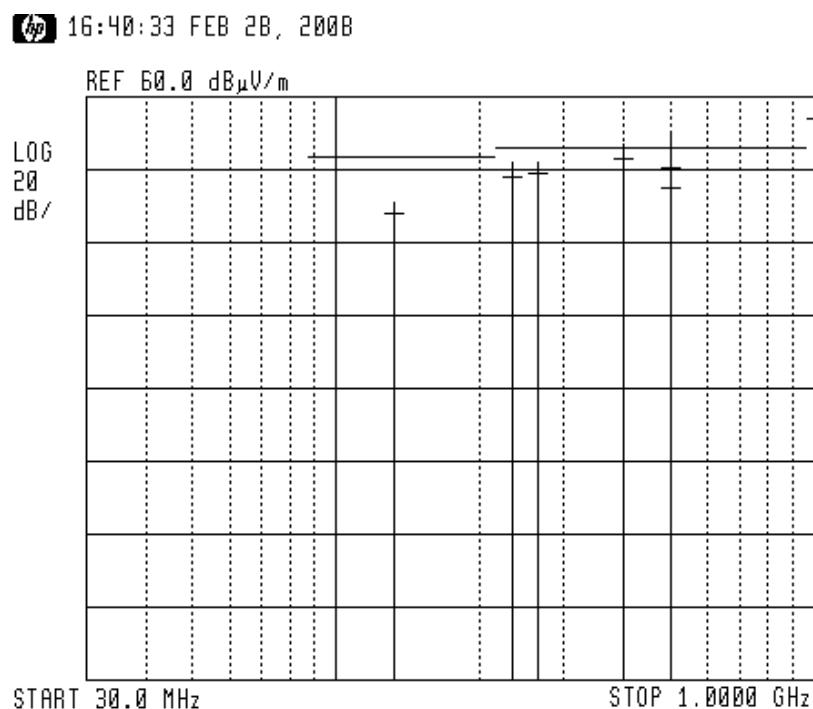

**Figure 183. Radiated Emission. Antenna Polarization: VERTICAL.
Detectors: Peak, Quasi-peak**

Note:

1. Horizontal axis shows logarithmic frequency scale.
2. The vertical axis shows amplitude (in dB μ V/m).
3. Peak detection is designated by the top of each vertical line.
4. Quasi-peak detection is designated by the first dash mark (from the top) of each vertical line.

15.4 ***Test Instrumentation Used, Radiated Measurements***

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3411A00102	November 12, 2007	1 year
RF Section	HP	85420E	3427A00103	November 12, 2007	1 year
Antenna Bi-conical	ARA	BCD 235/B	1041	March 22, 2007	1 year
Antenna Log Periodic	ARA	LPD-2010/A	1038	November 22, 2007	1 year
Active Loop Antenna	EMCO	6502	9506-2950	October 15, 2007	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A



15.5 **Field Strength Calculation**

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$[\text{dB}\mu\text{v}/\text{m}] \text{ FS} = \text{RA} + \text{AF} + \text{CF}$$

FS: Field Strength [dB μ v/m]
RA: Receiver Amplitude [dB μ v]
AF: Receiving Antenna Correction Factor [dB/m]
CF: Cable Attenuation Factor [dB]

No external pre-amplifiers are used.

16. Spurious Radiated Emission in the Restricted Band, Above 1 GHz 5GHz Transmitter 802.11b/g+802.11a + CELL + PCS Signals

16.1 Radiated Emission Above 1 GHz

The E.U.T operation mode and test set-up are as described in Section 3.

See Section 3.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 3.1.

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.

In the frequency range 1-2.9 GHz, a computerized EMI receiver complying to CISPR 16 requirements was used.

In the frequency range 2.9-40.0 GHz, a spectrum analyzer including a low noise amplifier was used. During average measurements, the IF bandwidth was 1 MHz and the video bandwidth was 100Hz. During peak measurements, the IF bandwidth was 1 MHz and the video bandwidth was 3 MHz.

The test distance was 3 meters.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

Verification of the E.U.T emissions was based on the following methods: turning the E.U.T on and off; using a frequency span less than 10 MHz; observation of the signal level during turntable rotation. (Background noise is not affected by the rotation of the E.U.T.)

The E.U.T. was tested at the operating frequencies of, 5180, 5200, 5240, 5745, 5765, and 5805 MHz using the following modulations: 64QAM, and BPSK.

16.2 Test Data

JUDGEMENT: Passed by 8.9 dB

For the operation frequency of 5180 MHz, the margin between the emission level and the specification limit is 10.0 dB in the worst case at the frequency of 10360.00 MHz, horizontal and vertical polarizations.

For the operation frequency of 5200 MHz, the margin between the emission level and the specification limit is 11.0 dB in the worst case at the frequency of 10400.00 MHz, horizontal and vertical polarizations.

For the operation frequency of 5240 MHz, the margin between the emission level and the specification limit is 10.0 dB in the worst case at the frequency of 10480.00 MHz, horizontal and vertical polarizations.

For the operation frequency of 5745 MHz, the margin between the emission level and the specification limit is 11.0 dB in the worst case at the frequency of 11490.00 MHz, vertical polarization.

For the operation frequency of 5765 MHz, the margin between the emission level and the specification limit is 9.0 dB in the worst case at the frequency of 11530.00 MHz, horizontal polarization.

For the operation frequency of 5805 MHz, the margin between the emission level and the specification limit is 8.9 dB in the worst case at the frequency of 11610.00 MHz, horizontal polarization.

The results for all modulations were the same.

The EUT met the requirements of the F.C.C. Part 15, Subpart C, specification.

TEST PERSONNEL:

Tester Signature: E. Pitt

Date: 02.03.08

Typed/Printed Name: E. Pitt

Radiated Emission Above 1 GHz

E.U.T Description WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points
 Type 860M With WCE
 Serial Number: 1. 860M: 73903D
 2. WCE: 739038

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 40.0 GHz
 Test Distance: 3 meters Detector: Peak
 Operation Frequency: 5180 MHz

Freq. (MHz)	Polarity (H/V)	Peak Amp (dB μ V/m)	Peak. Specification (dB μ V/m)	Peak. Margin (dB)
10360.00	H	61.9*	74.0	-12.1
10360.00	V	62.2*	74.0	-11.8

Figure 184. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL. Detector: Peak

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Amp” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

Radiated Emission Above 1 GHz

E.U.T Description WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points
 Type 860M With WCE
 Serial Number: 1. 860M: 73903D
 2. WCE: 739038

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 40.0 GHz
 Test Distance: 3 meters Detector: Average
 Operation Frequency: 5180 MHz

Freq.	Polarity	Average Amp	Average Specification	Peak Margin
(MHz)	(H/V)	(dB μ V/m)	(dB μ V/m)	(dB)
10360.00	H	44.0*	54.0	-10.0
10360.00	V	44.0*	54.0	-10.0

Figure 185. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL. Detector: Average

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Amp” includes correction factor.

* Correction Factor = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

Radiated Emission Above 1 GHz

E.U.T Description	WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points
Type	860M With WCE
Serial Number:	1. 860M: 73903D 2. WCE: 739038

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 40.0 GHz
 Test Distance: 3 meters Detector: Peak
 Operation Frequency: 5200 MHz

Freq. (MHz)	Polarity (H/V)	Peak Amp (dB μ V/m)	Peak. Specification (dB μ V/m)	Peak. Margin (dB)
10400.00	H	52.0*	74.0	-22.0
10400.00	V	52.0*	74.0	-22.0

Figure 186. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL. Detector: Peak

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Amp” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

Radiated Emission Above 1 GHz

E.U.T Description WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points
 Type 860M With WCE
 Serial Number: 1. 860M: 73903D
 2. WCE: 739038

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 40.0 GHz
 Test Distance: 3 meters Detector: Average
 Operation Frequency: 5200 MHz

Freq.	Polarity	Average Amp	Average Specification	Peak Margin
(MHz)	(H/V)	(dB μ V/m)	(dB μ V/m)	(dB)
10400.00	H	43.0*	54.0	-11.0
10400.00	V	43.0*	54.0	-11.0

Figure 187. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL. Detector: Average

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Amp” includes correction factor.

* Correction Factor = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

Radiated Emission Above 1 GHz

E.U.T Description	WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points
Type	860M With WCE
Serial Number:	1. 860M: 73903D 2. WCE: 739038

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 40.0 GHz
 Test Distance: 3 meters Detector: Peak
 Operation Frequency: 5240 MHz

Freq. (MHz)	Polarity (H/V)	Peak Amp (dB μ V/m)	Peak. Specification (dB μ V/m)	Peak. Margin (dB)
10480.00	H	52.0*	74.0	-22.0
10480.00	V	52.0*	74.0	-22.0

Figure 188. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL. Detector: Peak

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Amp” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

Radiated Emission Above 1 GHz

E.U.T Description WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points
 Type 860M With WCE
 Serial Number: 1. 860M: 73903D
 2. WCE: 739038

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 40.0 GHz
 Test Distance: 3 meters Detector: Average
 Operation Frequency: 5240 MHz

Freq.	Polarity	Average Amp	Average Specification	Peak Margin
(MHz)	(H/V)	(dB μ V/m)	(dB μ V/m)	(dB)
10480.00	H	44.0*	54.0	-10.0
10480.00	V	44.0*	54.0	-10.0

Figure 189. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL. Detector: Average

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Amp” includes correction factor.

* Correction Factor = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

Radiated Emission Above 1 GHz

E.U.T Description	WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points
Type	860M With WCE
Serial Number:	1. 860M: 73903D 2. WCE: 739038

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 40.0 GHz
 Test Distance: 3 meters Detector: Peak
 Operation Frequency: 5745 MHz

Freq. (MHz)	Polarity (H/V)	Peak Amp (dB μ V/m)	Peak. Specification (dB μ V/m)	Peak. Margin (dB)
11490.00	H	55.1*	74.0	-18.9
11490.00	V	55.1*	74.0	-18.9

Figure 190. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL. Detector: Peak

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Amp” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

Radiated Emission Above 1 GHz

E.U.T Description WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points
 Type 860M With WCE
 Serial Number: 1. 860M: 73903D
 2. WCE: 739038

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 40.0 GHz
 Test Distance: 3 meters Detector: Average
 Operation Frequency: 5745 MHz

Freq.	Polarity	Average Amp	Average Specification	Peak Margin
(MHz)	(H/V)	(dB μ V/m)	(dB μ V/m)	(dB)
11490.00	H	42.2*	54.0	-11.8
11490.00	V	43.0*	54.0	-11.0

Figure 191. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL. Detector: Average

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Amp” includes correction factor.

* Correction Factor = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

Radiated Emission Above 1 GHz

E.U.T Description	WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points
Type	860M With WCE
Serial Number:	1. 860M: 73903D 2. WCE: 739038

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 40.0 GHz
 Test Distance: 3 meters Detector: Peak
 Operation Frequency: 5765 MHz

Freq. (MHz)	Polarity (H/V)	Peak Amp (dB μ V/m)	Peak. Specification (dB μ V/m)	Peak. Margin (dB)
11530.00	H	55.3*	74.0	-18.7
11530.00	V	55.3*	74.0	-18.7

Figure 192. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL. Detector: Peak

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Amp” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

Radiated Emission Above 1 GHz

E.U.T Description WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points
 Type 860M With WCE
 Serial Number: 1. 860M: 73903D
 2. WCE: 739038

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 40.0 GHz
 Test Distance: 3 meters Detector: Average
 Operation Frequency: 5765 MHz

Freq.	Polarity	Average Amp	Average Specification	Peak Margin
(MHz)	(H/V)	(dB μ V/m)	(dB μ V/m)	(dB)
11530.00	H	45.0*	54.0	-9.0
11530.00	V	44.0*	54.0	-10.0

Figure 193. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL. Detector: Average

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Amp” includes correction factor.

* Correction Factor = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

Radiated Emission Above 1 GHz

E.U.T Description	WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points
Type	860M With WCE
Serial Number:	1. 860M: 73903D 2. WCE: 739038

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical	Frequency range: 1.0 GHz to 40.0 GHz
Test Distance: 3 meters	Detector: Peak
Operation Frequency: 5805 MHz	

Freq. (MHz)	Polarity (H/V)	Peak Amp (dB μ V/m)	Peak. Specification (dB μ V/m)	Peak. Margin (dB)
11610.00	H	56.4*	74.0	-17.6
11610.00	V	56.4*	74.0	-17.6

Figure 194. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL. Detector: Peak

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Amp” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

Radiated Emission Above 1 GHz

E.U.T Description WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points
 Type 860M With WCE
 Serial Number: 1. 860M: 73903D
 2. WCE: 739038

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 40.0 GHz
 Test Distance: 3 meters Detector: Average
 Operation Frequency: 5805 MHz

Freq.	Polarity	Average Amp	Average Specification	Peak Margin
(MHz)	(H/V)	(dB μ V/m)	(dB μ V/m)	(dB)
11610.00	H	45.1*	54.0	-8.9
11610.00	V	44.7*	54.0	-9.3

Figure 195. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL. Detector: Average

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Amp” includes correction factor.

* Correction Factor = Antenna Factor + Cable Loss- Low Noise Amplifier Gain

16.3 Test Instrumentation Used, Radiated Measurements Above 1 GHz

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
Receiver	HP	85422E	3411A00102	November 12, 2007	1 year
RF Section	HP	85420E	3427A00103	November 12, 2007	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A
Antenna-Log Periodic	A.H.System	SAS-200/511	253	February 4, 2007	2 years
Double Ridged Waveguide Horn Antenna	EMCO	3115	29845	March 15, 2006	2 years
Horn Antenna	ARA	SWH-28	1008	December 8, 2006	2 year
Horn Antenna	Narda	V637	0410	December 8, 2006	2 year
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS-0411N313	013	November 2, 2007	1 year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	January 9, 2008	1 year
Low Noise Amplifier	MK Milliwave	MKT6-3000 400-30-13P	399	January 9, 2008	1 year
Spectrum Analyzer	HP	8593EM	3536A00120	February 26, 2008	1 year
Spectrum Analyzer	HP	8546E	3442A00275	November 14, 2007	1 year
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

17. 26 dB Bandwidth 5 GHz Transmitter 802.11b/g+802.11a + CELL + PCS Signals

17.1 *Test procedure*

The E.U.T. was set to the applicable test frequency. The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator (20 dB) and appropriate coaxial cable (cable loss = 1 dB). The spectrum analyzer was set to 300 kHz resolution BW. The spectrum bandwidth of the E.U.T. was measured and recorded.

The E.U.T. was tested at 5180, 5200, 5240, 5745, 5765, and 5805 MHz with the following modulations: 64QAM (54Mbit/sec) and BPSK (6Mbit/sec).

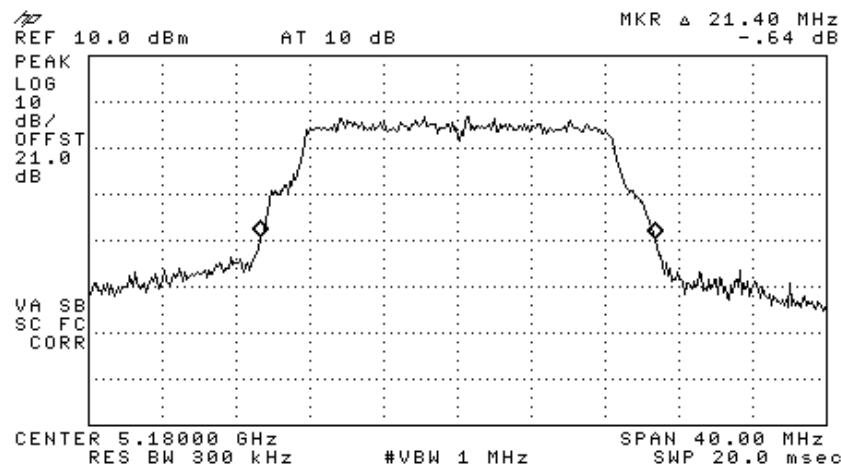


Figure 196 — 5180 MHz 64QAM

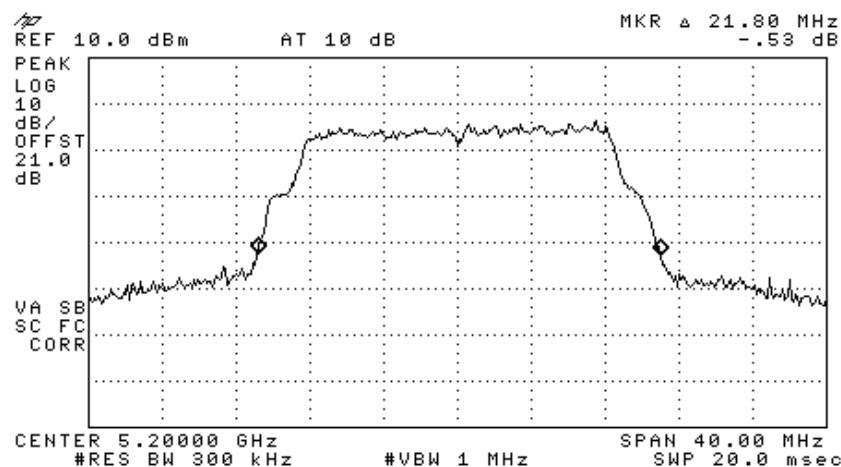


Figure 197 —5200 MHZ 64QAM

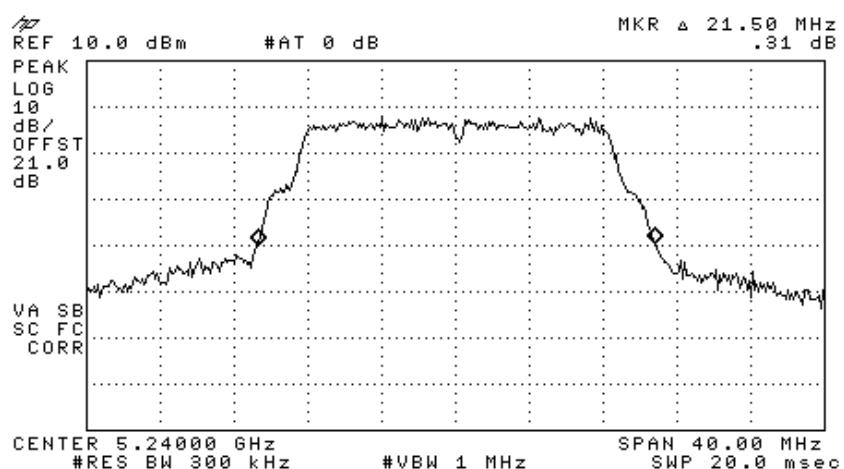


Figure 198 —5240 MHZ 64QAM

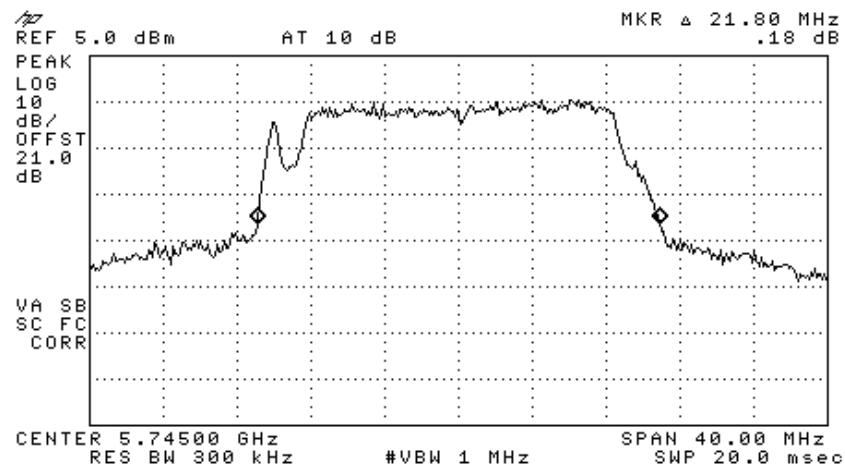


Figure 199 —5745 MHz 64QAM

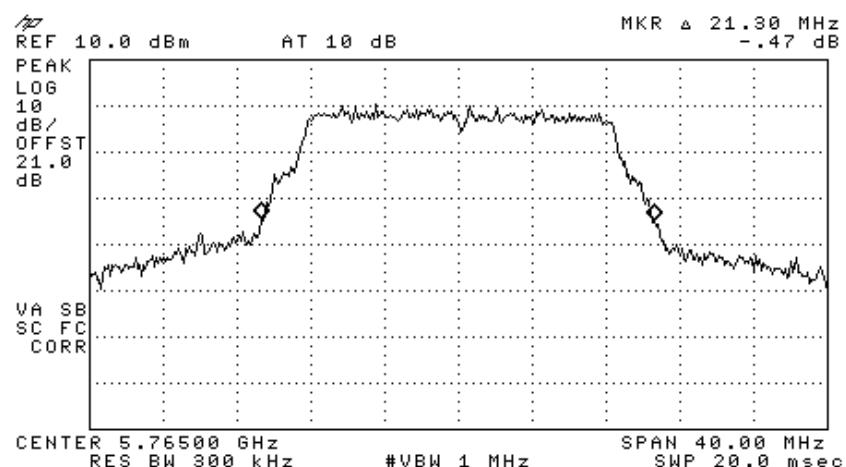


Figure 200 —5765 MHz 64QAM

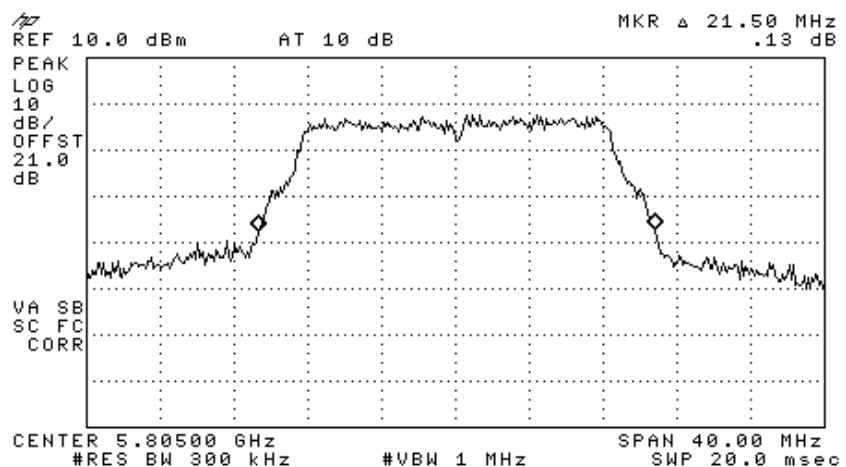


Figure 201 —5805 MHZ 64QAM

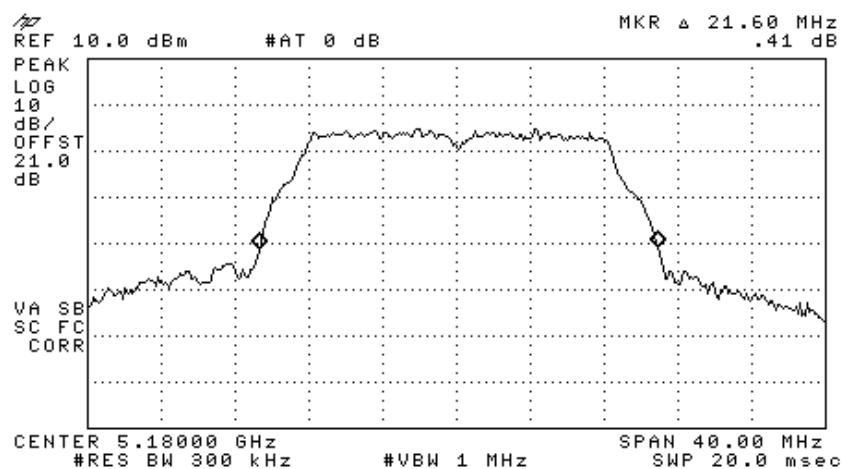


Figure 202 —5180 MHz BPSK

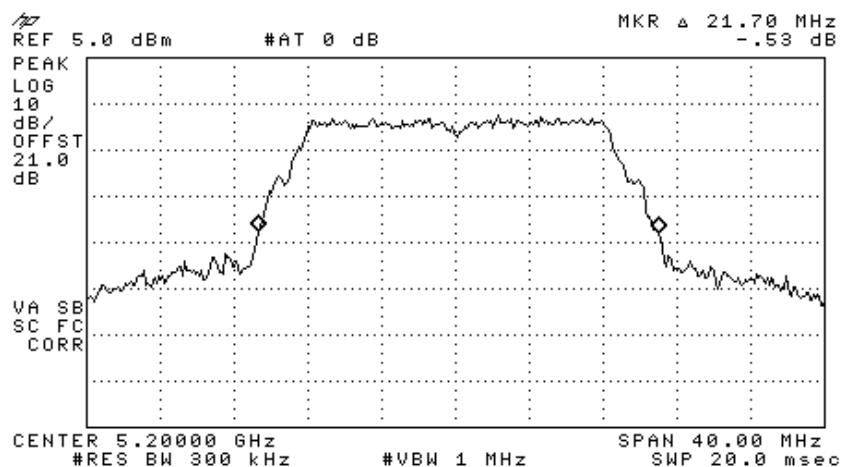


Figure 203 —5200 MHZ BPSK

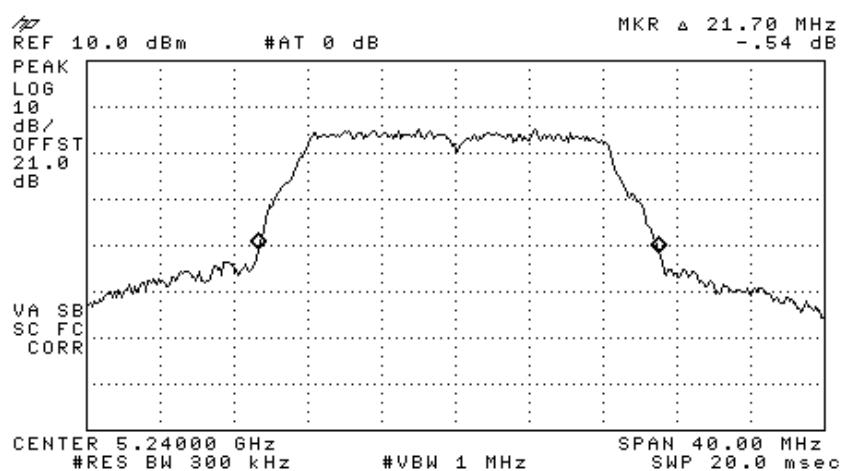


Figure 204 —5240 MHZ BPSK

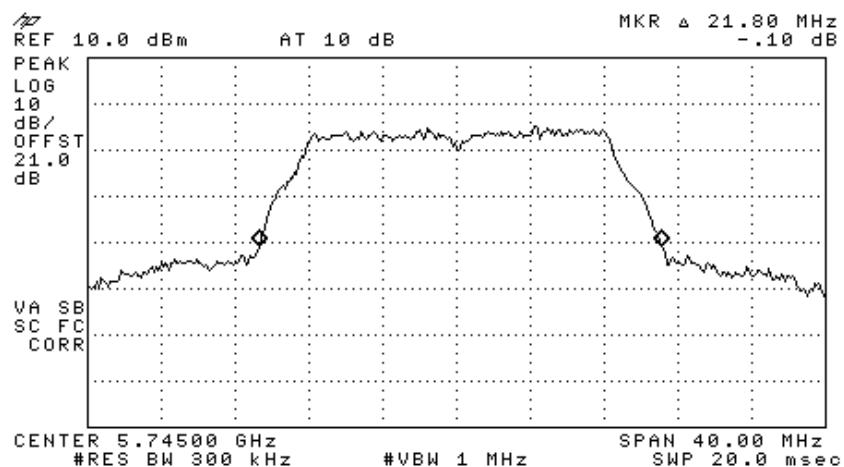


Figure 205 —5745 MHz BPSK

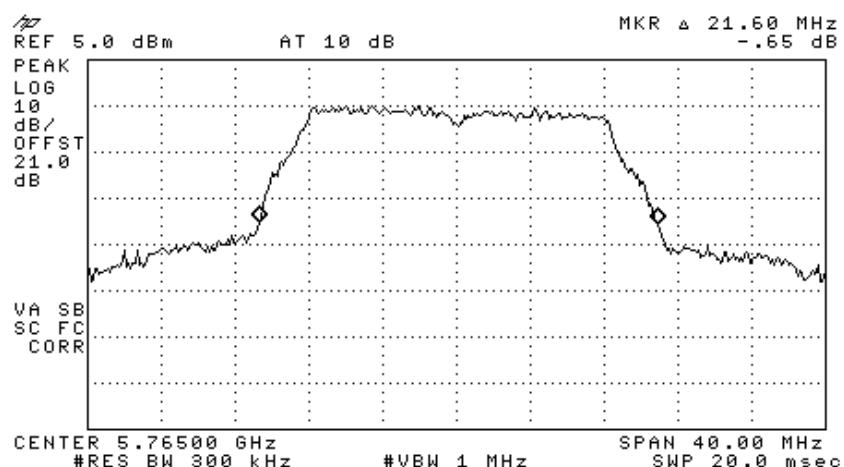


Figure 206 —5765 MHz BPSK

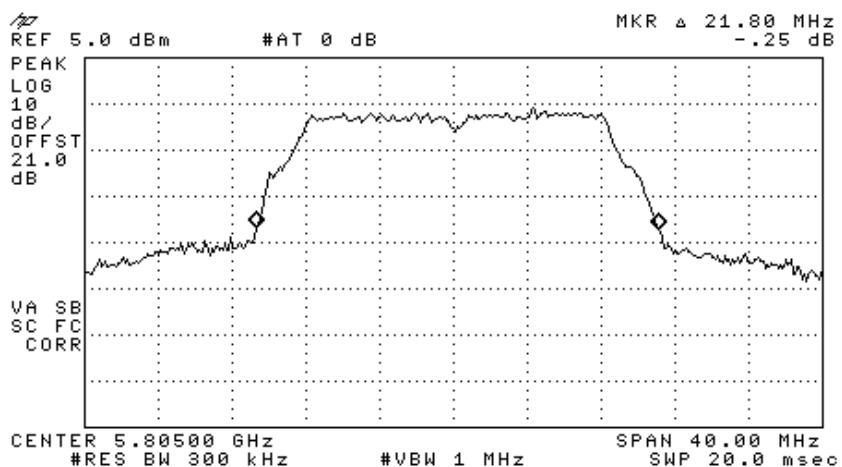


Figure 207 —5805 MHZ BPSK

Operation Frequency (MHz)	Modulation	26 dB Bandwidth (dBm)
5180	64QAM	21.40
	BPSK	21.60
5200	64QAM	21.80
	BPSK	21.70
5240	64QAM	21.50
	BPSK	21.70
5745	64QAM	21.80
	BPSK	21.80
5765	64QAM	21.30
	BPSK	21.60
5805	64QAM	21.50
	BPSK	21.80

TEST PERSONNEL:

Tester Signature: E. Pitt

Date: 28.02.08

Typed/Printed Name: E. Pitt

17.2 **Test Equipment Used.**

26 dB Minimum Bandwidth

Instrument	Manufacturer	Model	Serial/Part Number	Calibration	
				Last Calibr.	Period
Spectrum Analyzer	HP	8592L	3826A01204	February 22, 2007	1 year
Attenuator	Jyebao	-	FAT-AM5AF5G6G2W20	May 9, 2007	1 year
Cable	Rhophase	KPS-5000-KPS	A1674	February 8, 2008	1 year
Cable	Rhophase	KPS-1501-1000	A1675	February 8, 2008	1 year

Figure 208 Test Equipment Used

18. Maximum Conducted Output Power 5 GHz Transmitter 802.11b/g+802.11a + CELL + PCS Signals

18.1 Test procedure

The E.U.T. antenna terminal was connected to the Spectrum Analyzer through an external attenuator (20 dB) and an appropriate coaxial cable (Cable Loss = 1 dB). The Spectrum Analyzer was set to 1.0 MHz resolution BW. Sample detector and maximum hold were used.

The E.U.T. was tested at 5180, 5200, 5240, 5745, 5765, and 5805 MHz with the following modulations: 64QAM (54Mbit/sec) and BPSK (6Mbit/sec).

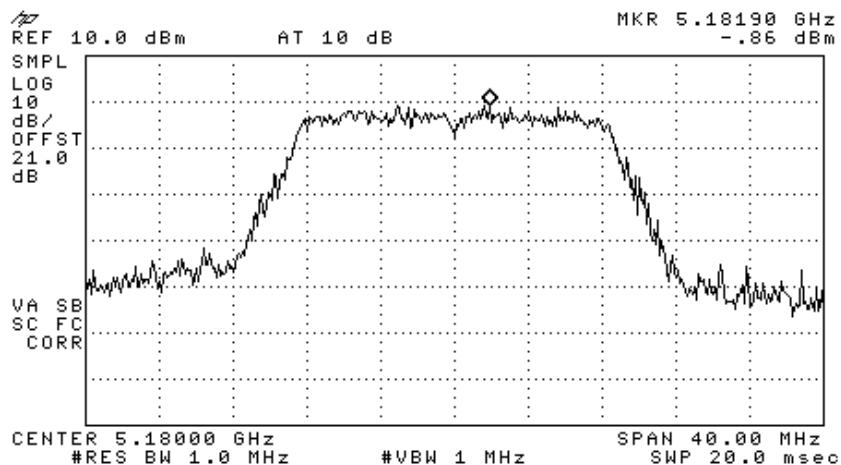


Figure 209 5180 MHz 64QAM

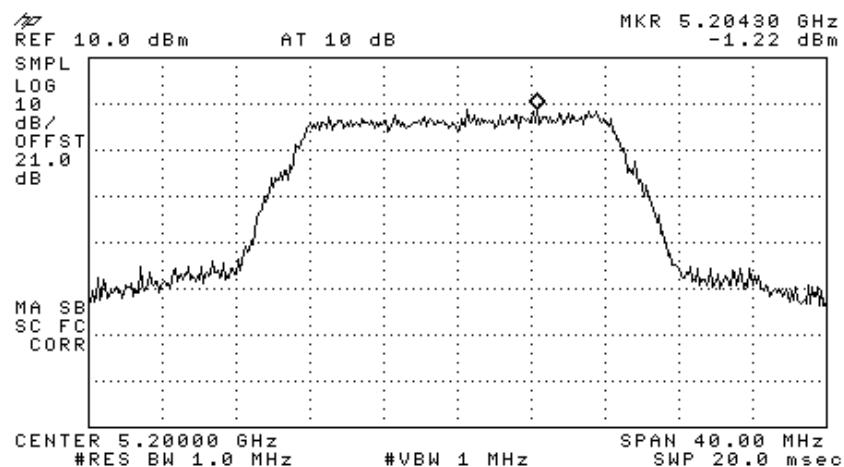


Figure 210 5200 MHz 64QAM

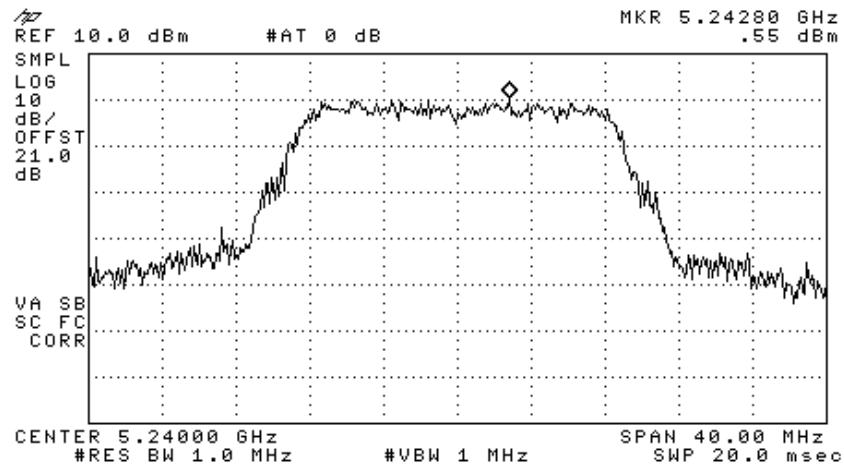


Figure 211 5240 MHz 64QAM

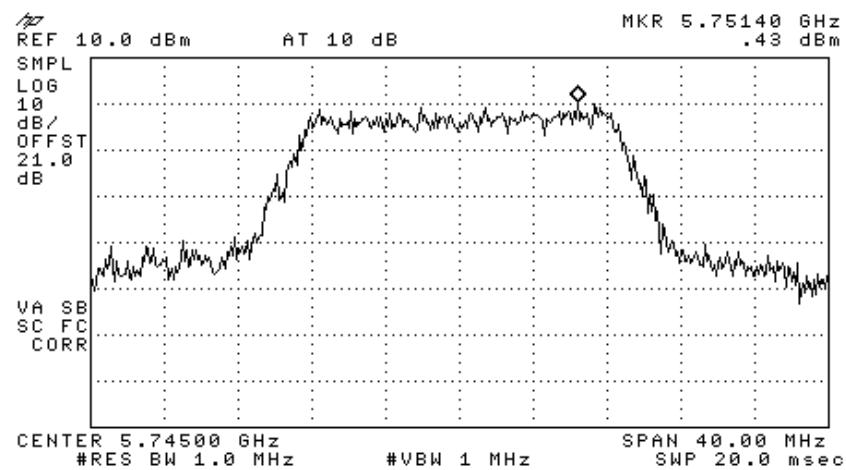


Figure 212 5745 MHz 64QAM

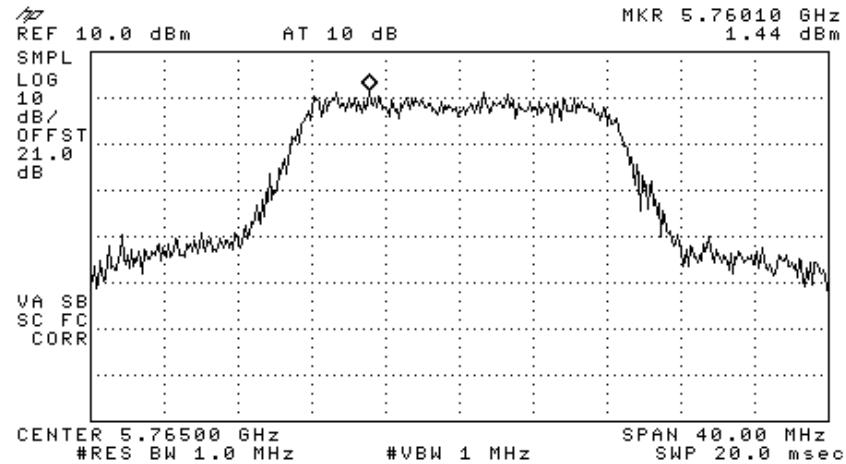


Figure 213 5765 MHz 64QAM

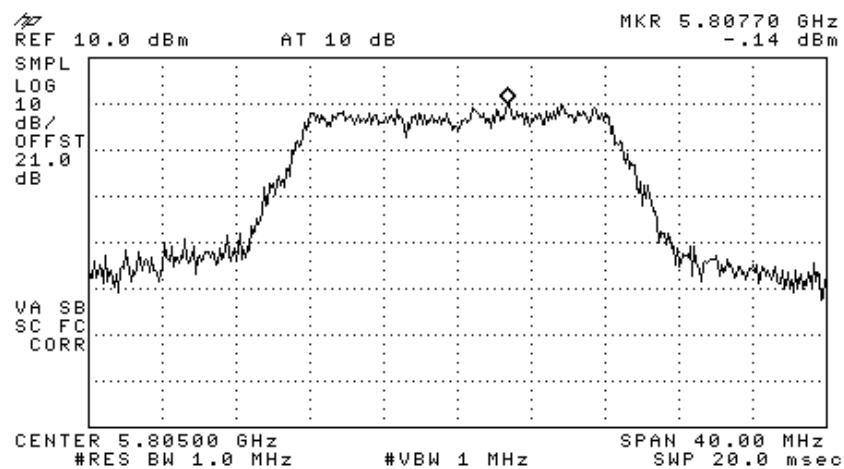


Figure 214 5805 MHz 64QAM

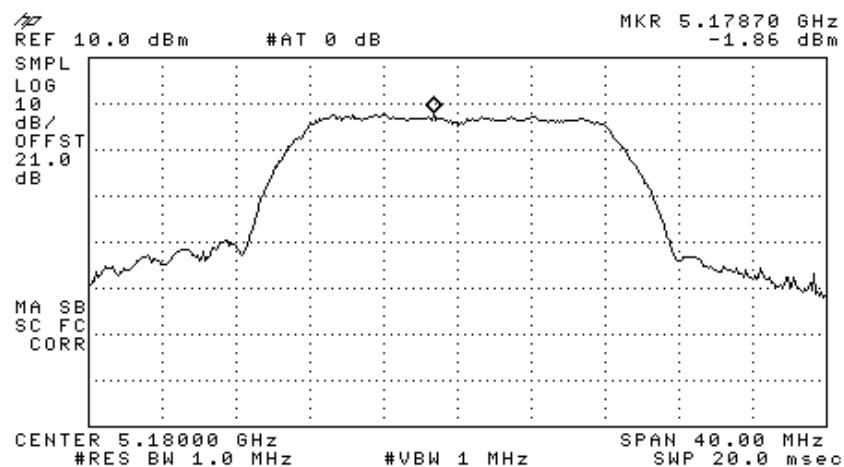


Figure 215 5180 MHz BPSK

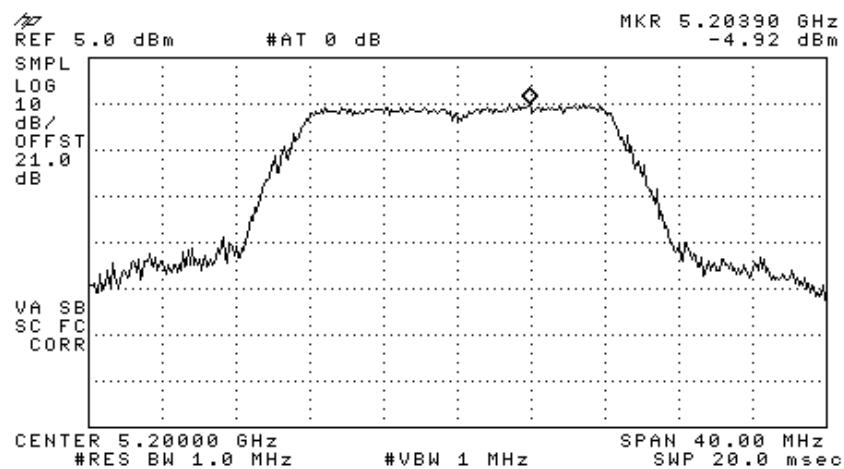


Figure 216 5200 MHz BPSK

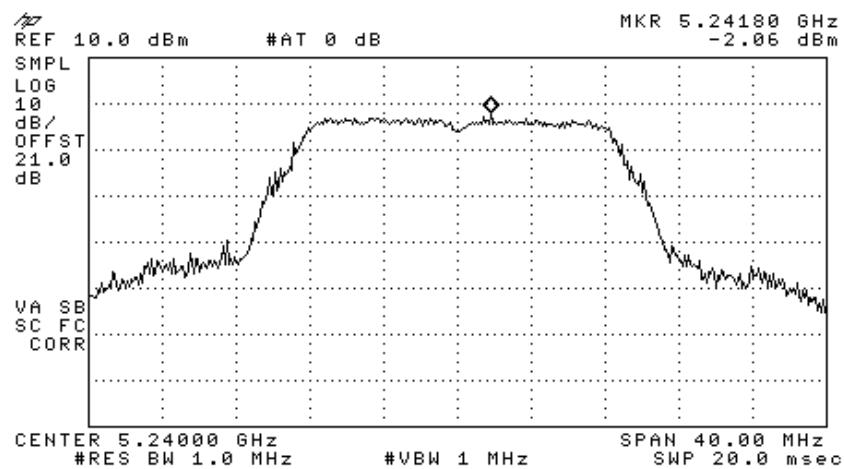


Figure 217 5240 MHz BPSK

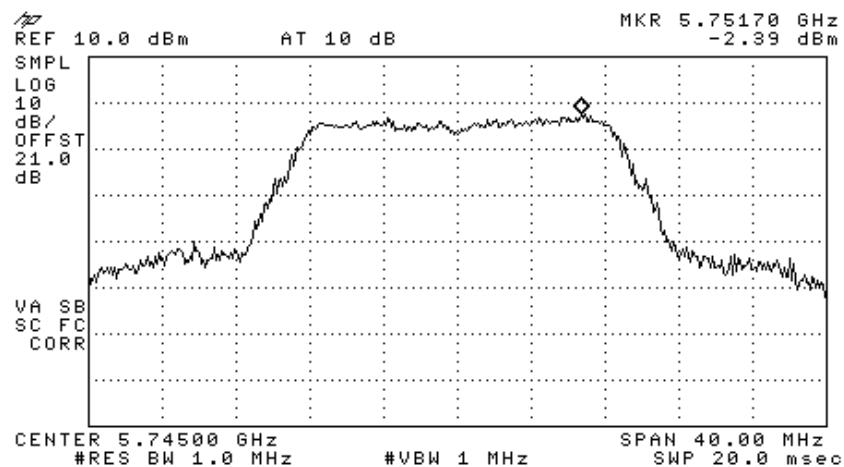


Figure 218 5745 MHz BPSK

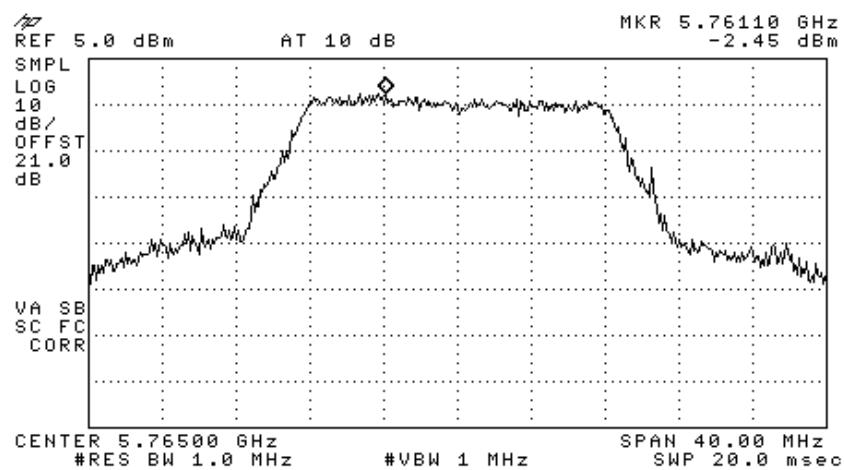


Figure 219 5765 MHz BPSK

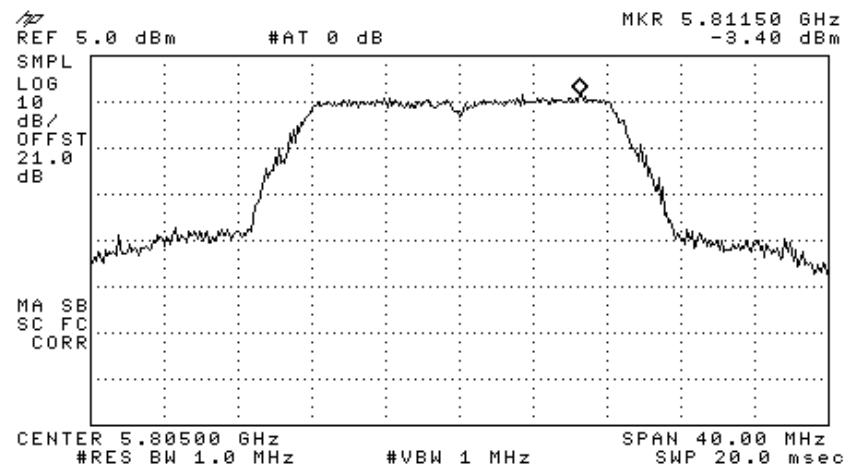


Figure 220 5805 MHz BPSK

18.2 Results table

E.U.T. Description: WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points

Model No.: 860M With WCE

Serial Number: 1. 860M: 73903D 2. WCE: 739038

Specification: F.C.C. Part 15, Subpart E

Operation Frequency (MHz)	Modulation	Power (dBm)	Specification (dBm)	Margin (dB)
5180	64QAM	12.44	16	-3.56
	BPSK	11.5	16	-4.50
5200	64QAM	12.16	16	-3.84
	BPSK	8.44	16	-7.56
5240	64QAM	13.87	16	-2.13
	BPSK	11.30	16	-4.70
5745	64QAM	13.81	29	-15.19
	BPSK	10.99	29	-18.01
5765	64QAM	14.72	29	-14.28
	BPSK	10.89	29	-18.11
5805	64QAM	13.18	29	-5.82
	BPSK	10.0	29	-19.0

Figure 221 Maximum Peak Power Output

Note: Antenna Gain is 7 dBi

Peak Output Power = Reading + $10\log_{10} EBW$

For 5.18; 5.20, 5.24 GHz Peak Output Power Limit = $4 + 10\log_{10} EBW - (\text{Antenna Gain} - 6)$ or 16 whichever is less.

For 5.745; 5.765, 5.805 GHz Peak Output Power Limit = $17 + 10\log_{10} EBW - (\text{Antenna Gain} - 6)$ or 29 whichever is less.

JUDGEMENT: Passed by 2.13 dB

TEST PERSONNEL:

Tester Signature:  Date: 28.02.08
 Typed/Printed Name: E. Pitt

18.3 Test Equipment Used.

Peak Power Output

Instrument	Manufacturer	Model	Serial/Part Number	Calibration	
				Last Calibr.	Period
Spectrum Analyzer	HP	8592L	3826A01204	February 22, 2007	1 year
Attenuator	Jyebao	-	FAT-AM5AF5G6G2W20	May 9, 2007	1 year
Cable	Rhophase	KPS-5000-KPS	A1674	February 8, 2008	1 year

Figure 222 Test Equipment Used

19. Peak Power Spectral Density 5GHz Transmitter 802.11b/g+802.11a + CELL + PCS Signals

[In accordance with section 15.407(a)]

19.1 Test procedure

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator (20dB) and an appropriate coaxial cable (Cable Loss = 1 dB). The spectrum analyzer was set to 1 MHz resolution BW. and 1 MHz video BW. The spectrum peaks were located at 5180, 5200, 5240, 5745, 5765, and 5805 MHz with the following modulations: 64QAM (54Mbit/sec) and BPSK (6Mbit/sec).

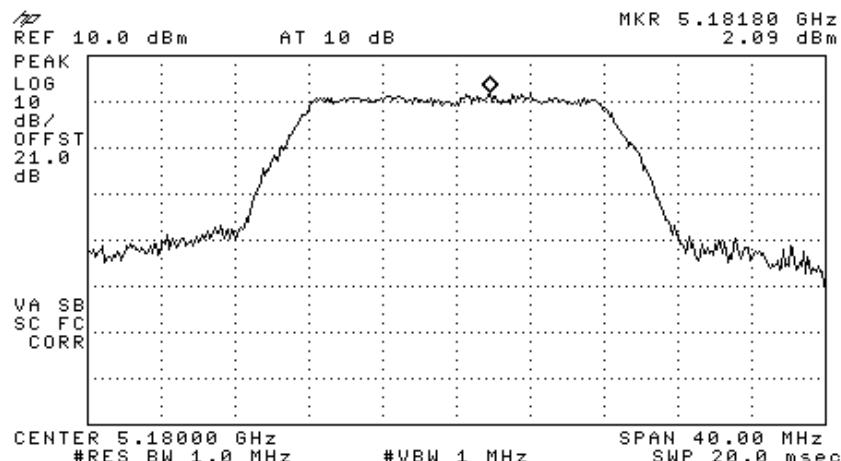


Figure 223 —5180 MHz 64QAM

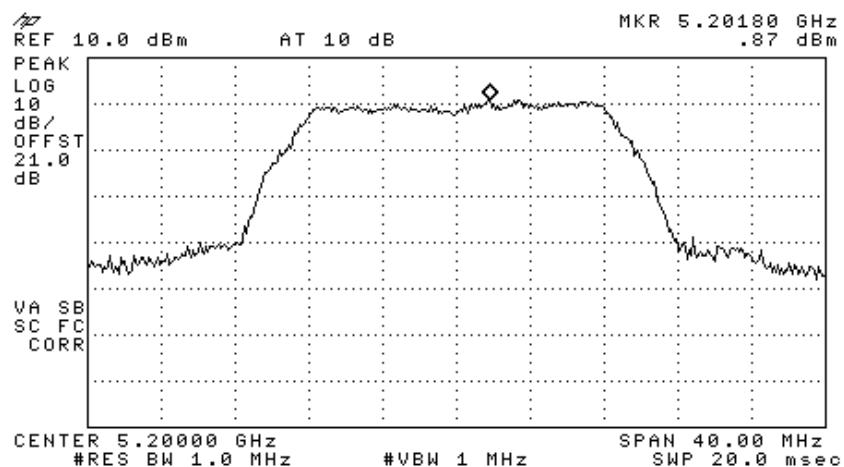


Figure 224 —5200 MHz 64QAM

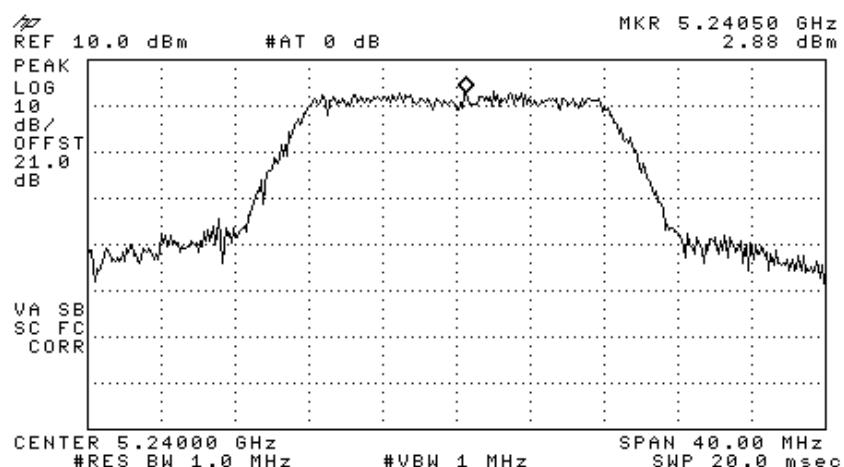


Figure 225 —5240 MHz 64QAM

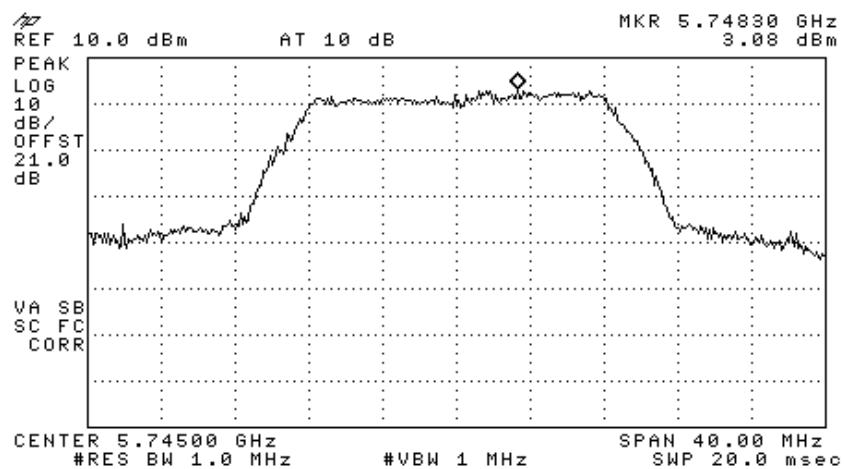


Figure 226 —5745 MHz 64QAM

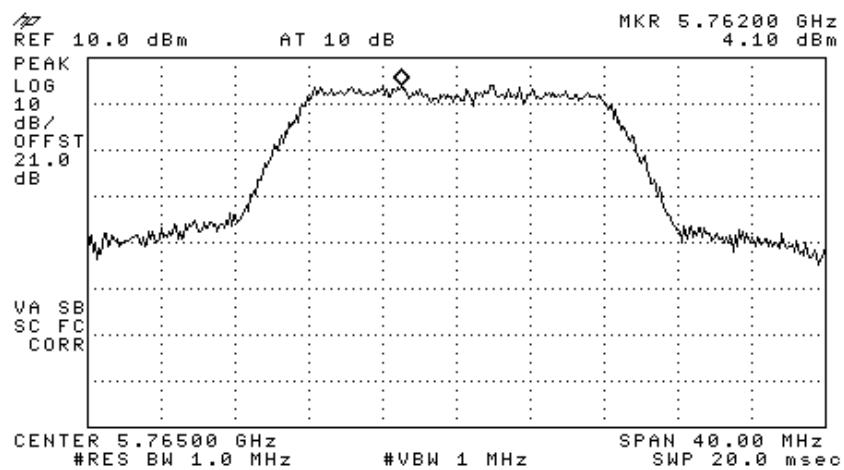


Figure 227 —5765 MHz 64QAM

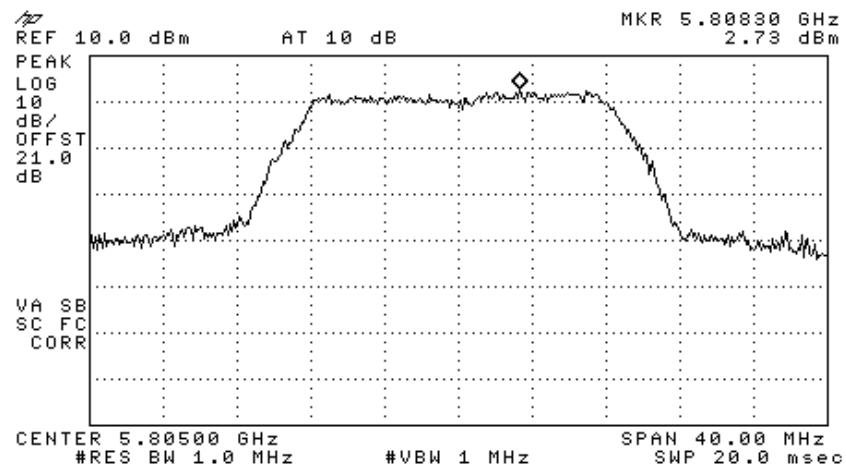


Figure 228 —5805 MHz 64QAM

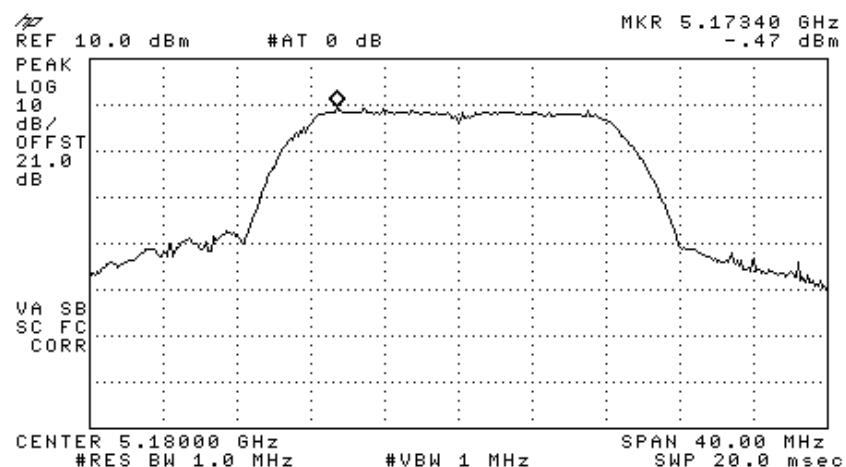


Figure 229 —5180 MHz BPSK

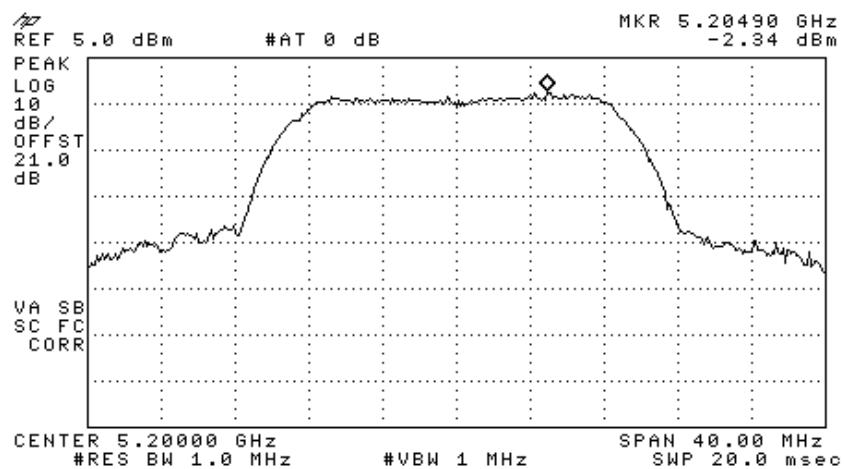


Figure 230 —5200 MHz BPSK

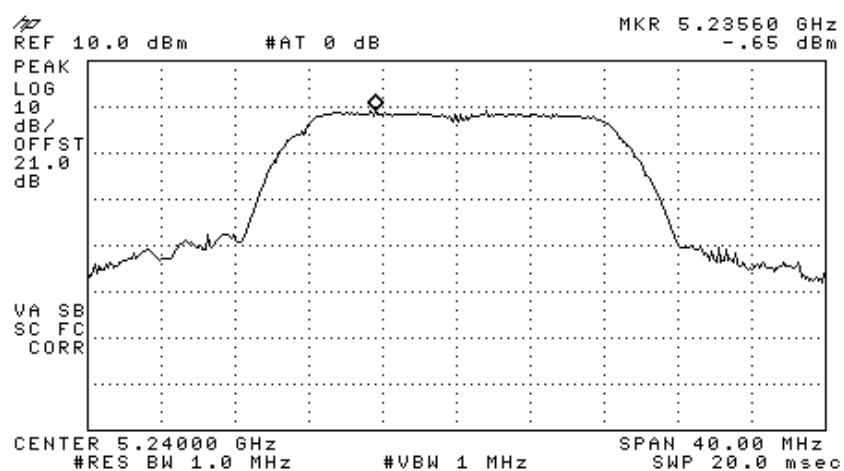


Figure 231 —5240 MHz BPSK

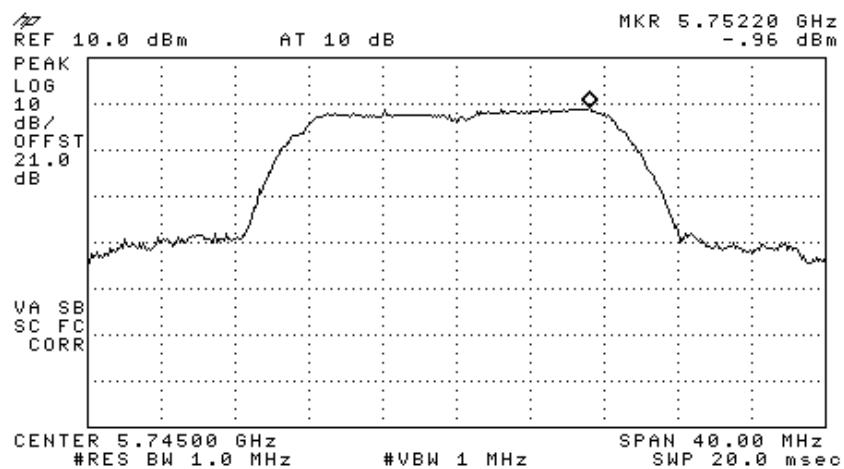


Figure 232 —5745 MHz BPSK

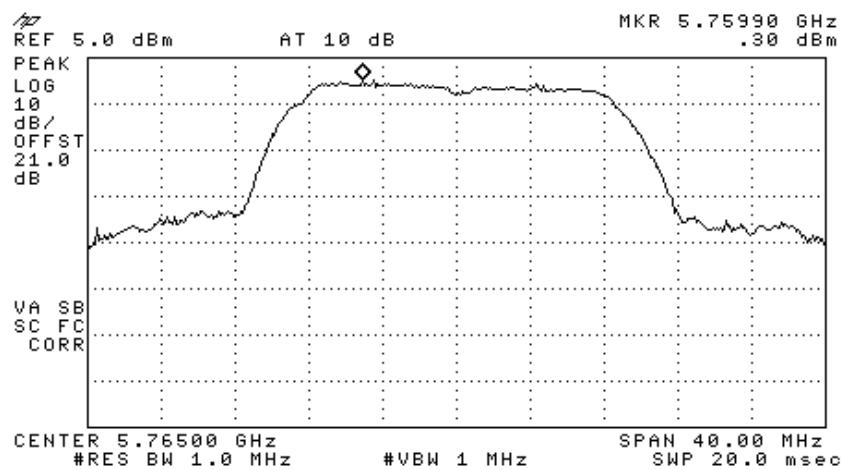


Figure 233 —5765 MHz BPSK

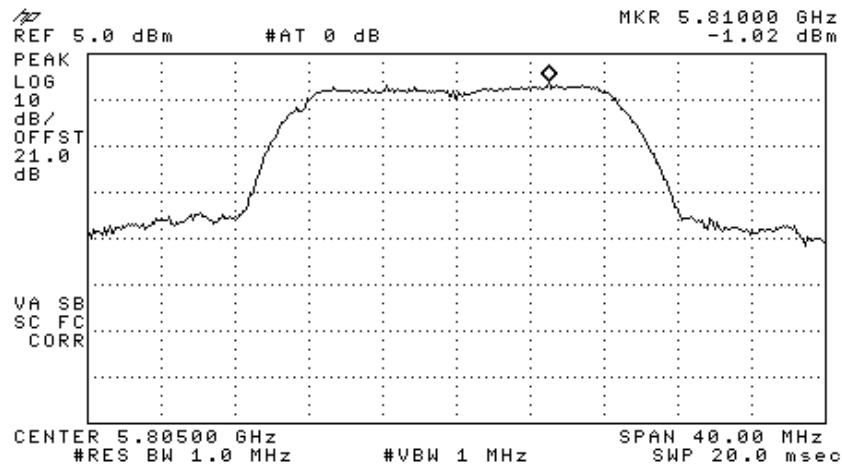


Figure 234 —5805 MHz BPSK

19.2 Results table

E.U.T. Description: WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points
 Model No.: 860M With WCE
 Serial Number: 1. 860M: 73903D 2. WCE: 739038
 Specification: F.C.C. Part 15, Subpart E (15.407(a))

Operation Frequency (MHz)	Modulation	Reading Spectrum Analyzer (dBm)	Specification (dBm)	Margin (dB)
5180	64QAM	2.09	3	-0.91
	BPSK	0.47	3	-2.53
5200	64QAM	0.87	3	-2.13
	BPSK	2.34	3	-0.66
5240	64QAM	2.88	3	-0.12
	BPSK	0.65	3	-2.35
5745	64QAM	3.08	16	-12.92
	BPSK	0.96	16	-15.04
5765	64QAM	4.1	16	-11.9
	BPSK	0.3	16	-15.7
5805	64QAM	2.73	16	-13.27
	BPSK	1.02	16	-14.98

Figure 235 Test Results



JUDGEMENT: Passed by 0.12 dB

TEST PERSONNEL:

Tester Signature: E. Pitt Date: 28.02.08

Typed/Printed Name: E. Pitt

19.3 Test Equipment Used.

Peak Power Spectral Density

Instrument	Manufacturer	Model	Serial/Part Number	Calibration	
				Last Calibr.	Period
Spectrum Analyzer	HP	8592L	3826A01204	February 22, 2007	1 year
Attenuator	Jyebao	-	FAT-AM5AF5G6G2W20	May 9, 2007	1 year
Cable	Rhophase	KPS-5000-KPS	A1674	February 8, 2008	1 year

Figure 236 Test Equipment Used

20. Ratio of Peak Excursion of Modulation Envelope to Maximum Conducted Output Power 5GHz Transmitter 802.11b/g+802.11a + CELL + PCS Signals

[In accordance with section 15.407(a)(6)]

20.1 Test procedure

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator (20dB) and an appropriate coaxial cable (Cable Loss = 1 dB). The spectrum analyzer was set to 1 MHz resolution BW. and 1 MHz video BW.

Trace A: Sample Detector

Trace B: Peak Detector

The E.U.T. was tested at 5180, 5200, 5240, 5745, 5765, and 5805 MHz with the following modulations: 64QAM (54Mbit/sec) and BPSK (6Mbit/sec).

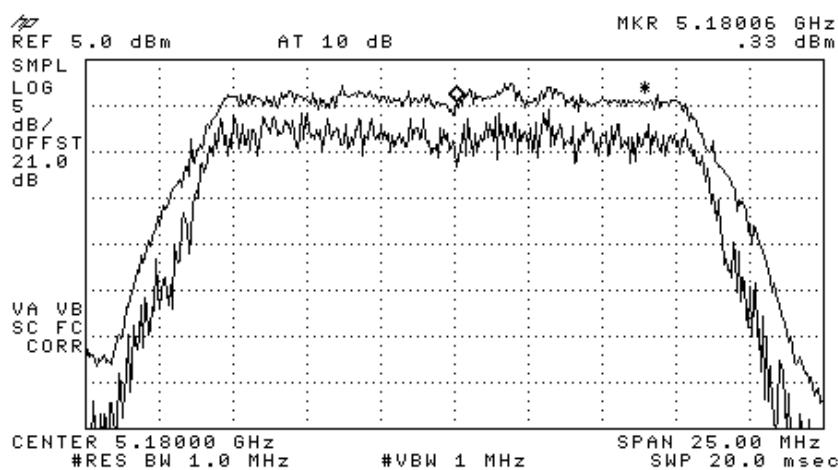


Figure 237 — 5180 MHz 64QAM

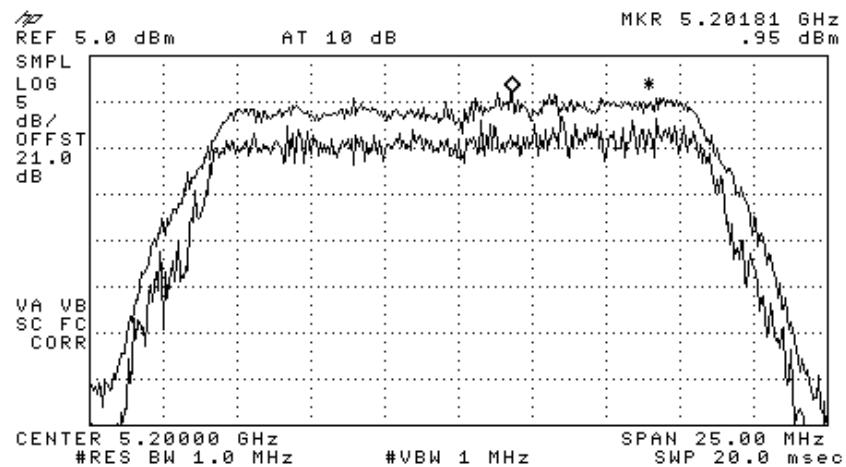


Figure 238 —5200 MHz 64QAM

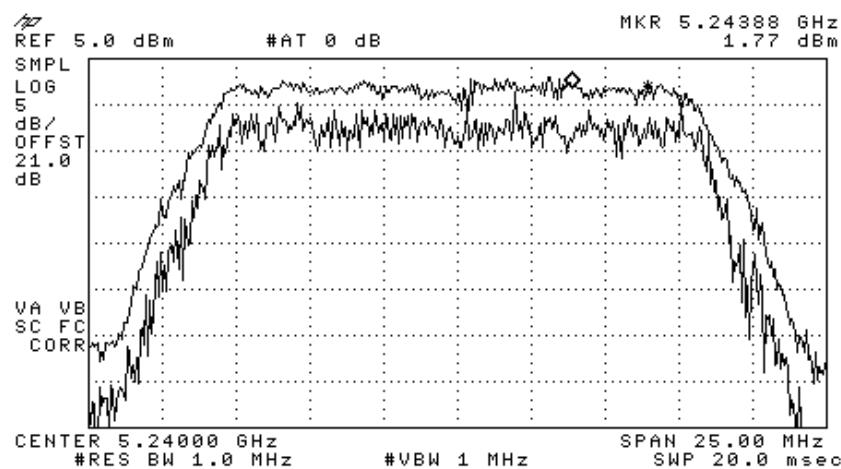


Figure 239 —5240 MHz 64QAM

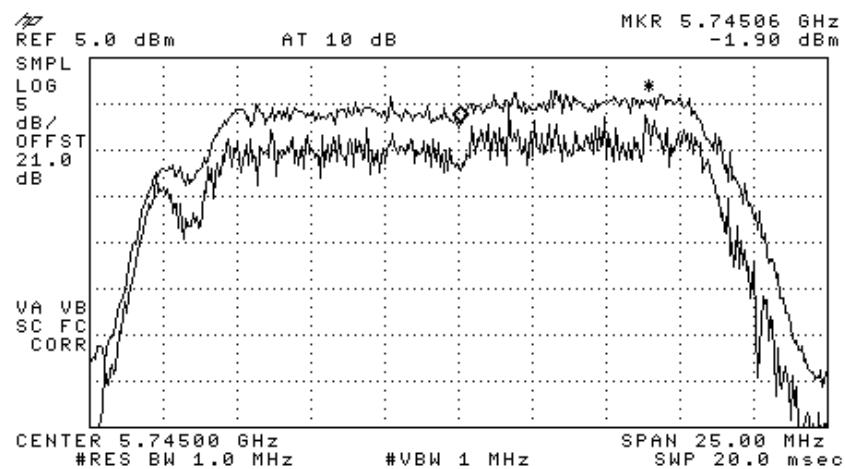


Figure 240 —5745 MHz 64QAM

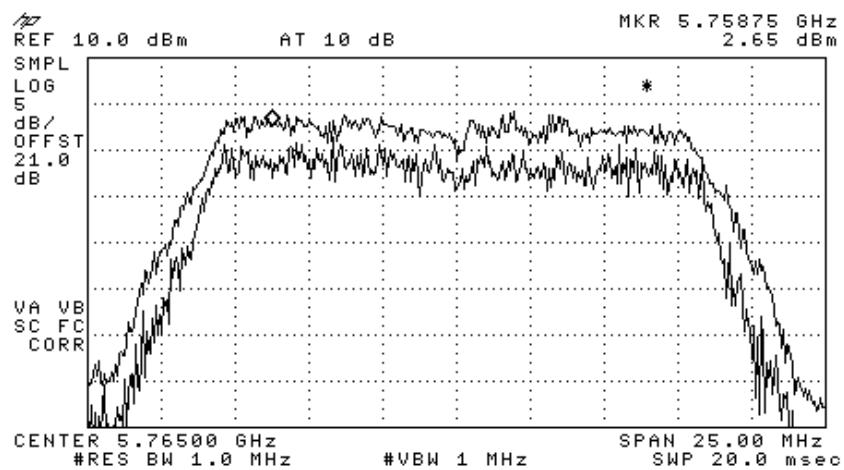


Figure 241 —5765 MHz 64QAM

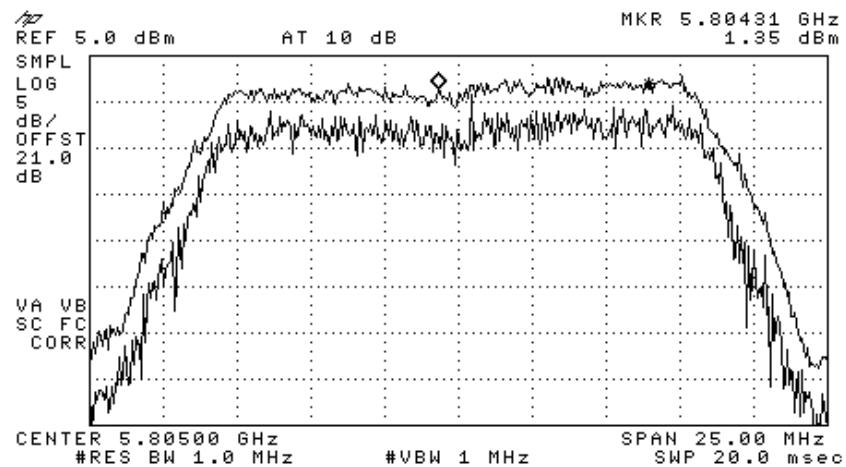


Figure 242 —5805 MHz 64QAM

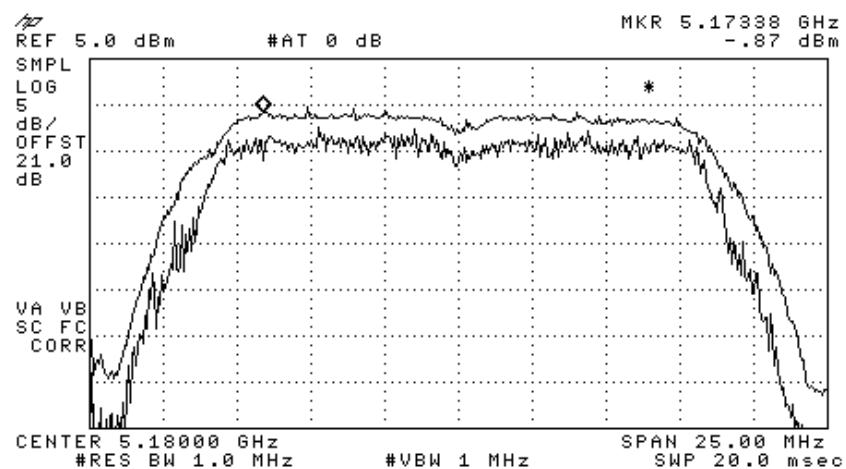


Figure 243 —5180 MHz BPSK

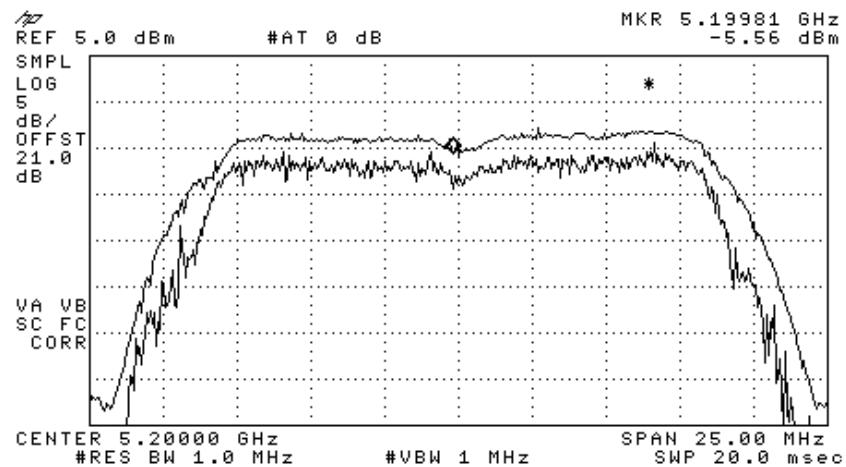


Figure 244 —5200 MHz BPSK

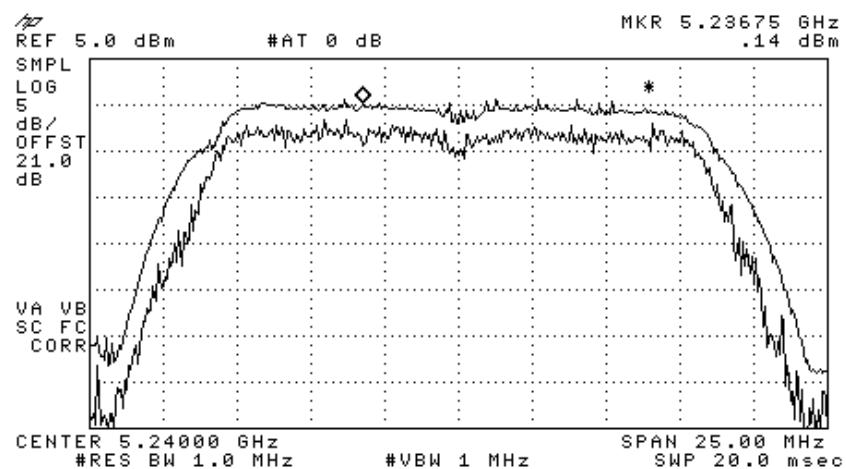


Figure 245 —5240 MHz BPSK

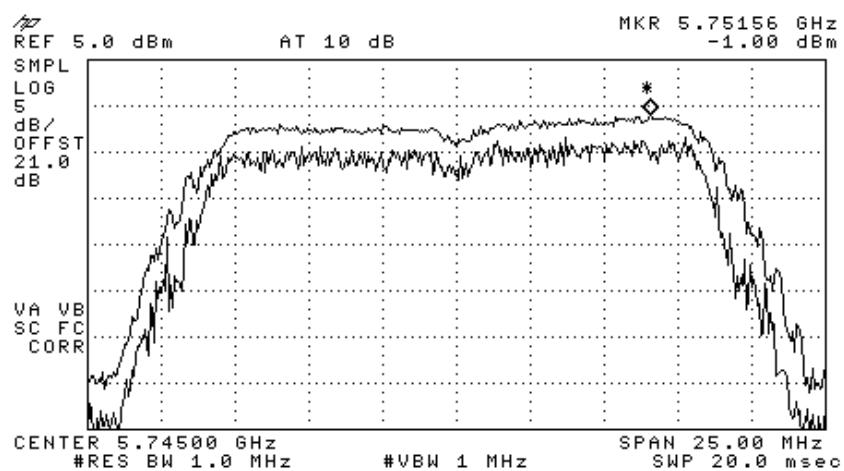


Figure 246 —5745 MHz BPSK

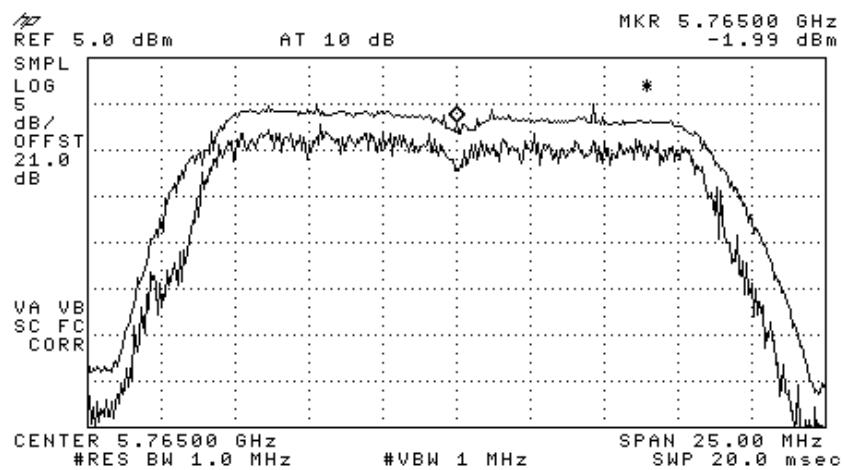


Figure 247 —5765 MHz BPSK

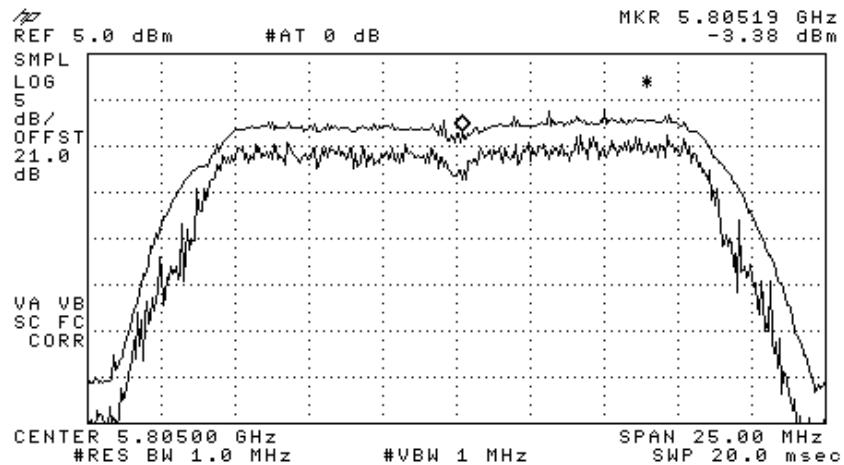


Figure 248 —5805 MHz BPSK

20.2 Results table

E.U.T. Description: WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points
 Model No.: 860M With WCE
 Serial Number: 1. 860M: 73903D 2. WCE: 739038
 Specification: F.C.C. Part 15, Subpart E (15.407(a)(6))

Operation Frequency (MHz)	Modulation	Delta (dB)	Specification (dB)	Margin (dB)
5180	64QAM	6.9	13	-6.1
	BPSK	5.3	13	-7.7
5200	64QAM	5.6	13	-7.4
	BPSK	4.1	13	-8.9
5240	64QAM	5.8	13	-7.2
	BPSK	4.6	13	-8.4
5745	64QAM	5.3	13	-7.7
	BPSK	4.8	13	-8.2
5765	64QAM	5.8	13	-7.2
	BPSK	5.2	13	-7.8
5805	64QAM	5.3	13	-7.7
	BPSK	5.2	13	-7.8

Figure 249 Test Results



JUDGEMENT: Passed by 6.1 dB

TEST PERSONNEL:

Tester Signature: Pitt Date: 28.02.08

Typed/Printed Name: E. Pitt

20.3 Test Equipment Used.

Peak Power Spectral Density

Instrument	Manufacturer	Model	Serial/Part Number	Calibration	
				Last Calibr.	Period
Spectrum Analyzer	HP	8592L	3826A01204	February 22, 2007	1 year
Attenuator	Jyebao	-	FAT-AM5AF5G6G2W20	May 9, 2007	1 year
Cable	Rhophase	KPS-5000-KPS	A1674	February 8, 2008	1 year

Figure 250 Test Equipment Used

21. Peak Power Output Out of 5150-5250; 5725-5825 MHz Bands 5 GHz Transmitter 802.11b/g+802.11a + CELL + PCS Signals

21.1 *Test procedure*

The E.U.T. antenna terminal was connected to the spectrum analyzer through an appropriate coaxial cable. The spectrum analyzer was set to 1 MHz resolution BW except for the frequency range 9 kHz-150 kHz where the RBW was set to 1kHz and the frequency range 150 kHz-10.0 MHz where the RBW was set to 10kHz. The frequency range from 9 kHz to 40 GHz was scanned. Level of spectrum components out of the 5150-5250; 5725-5825 MHz bands was measured at the selected operation frequencies.

The E.U.T. was tested at 5180, 5200, 5240, 5745, 5765, and 5805 MHz with the following modulations: 64QAM (54Mbit/sec) and BPSK (6Mbit/sec).

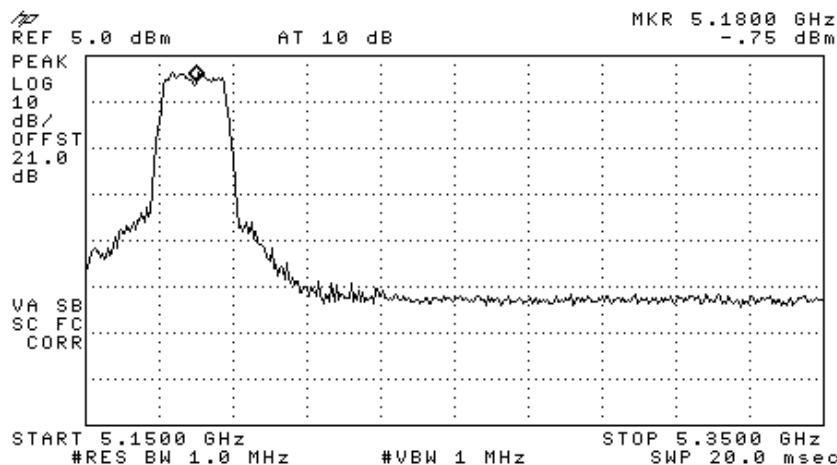


Figure 251 —5180 MHz 64QAM

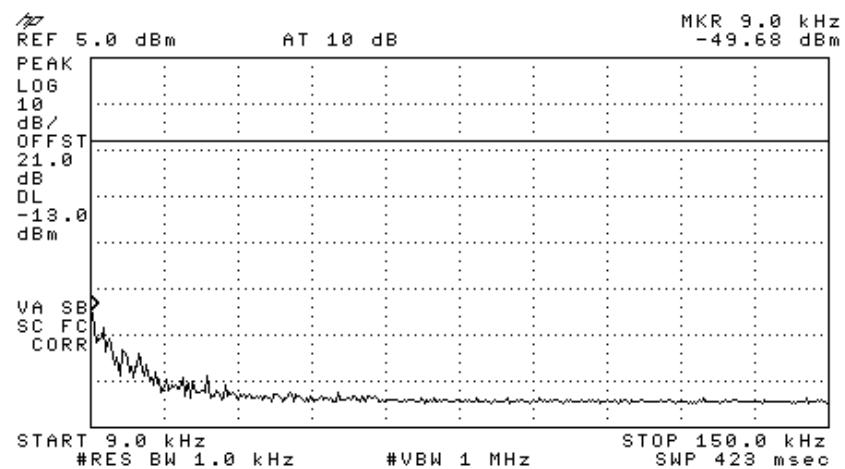


Figure 252 —5180 MHz 64QAM

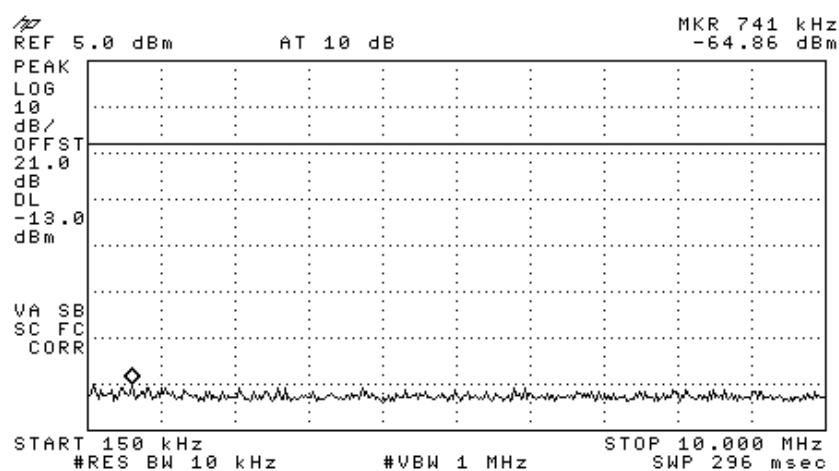


Figure 253 —5180 MHz 64QAM

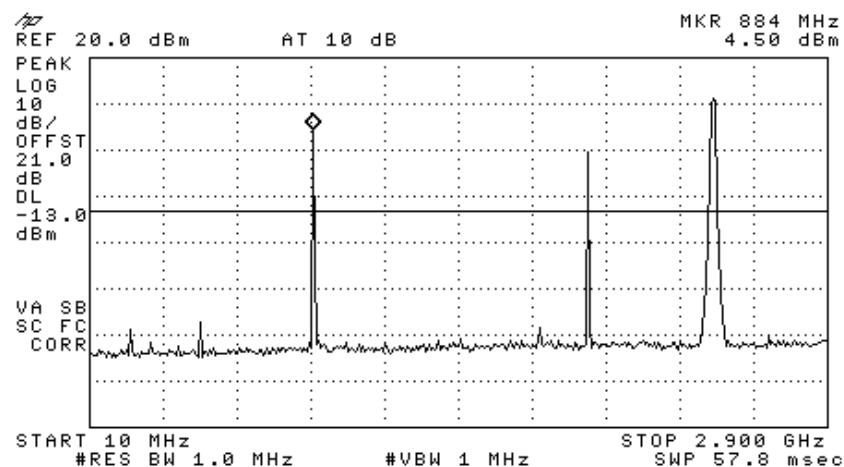


Figure 254 —5180 MHz 64QAM

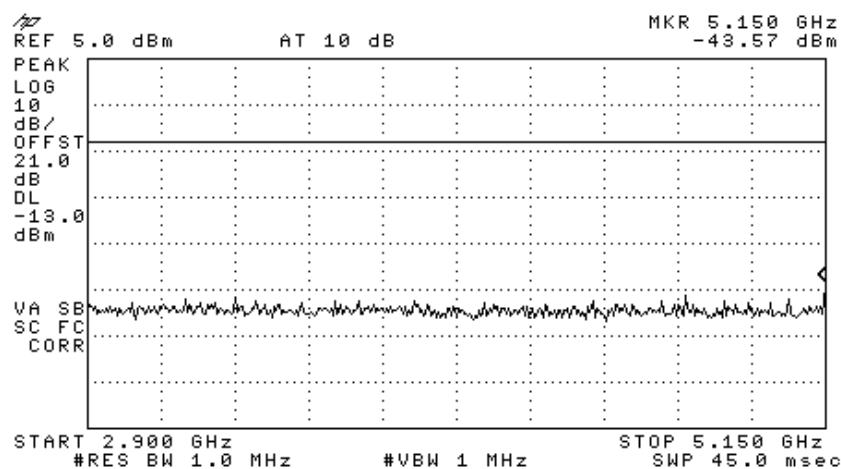


Figure 255 —5180 MHz 64QAM

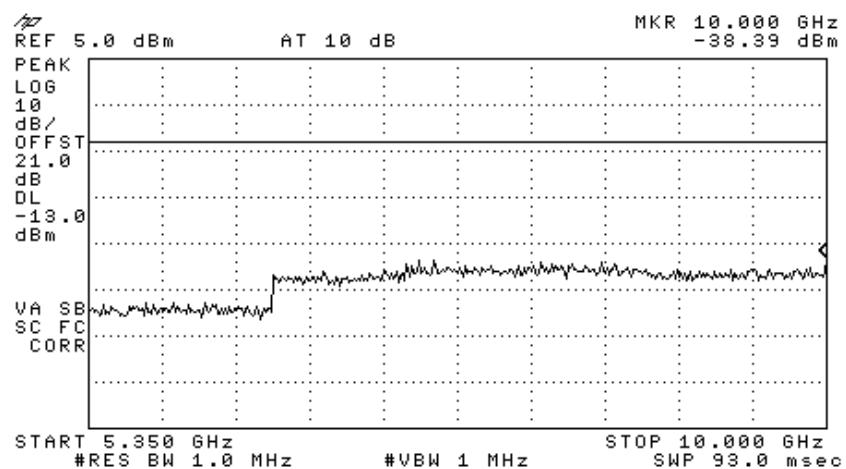


Figure 256 —5180 MHz 64QAM

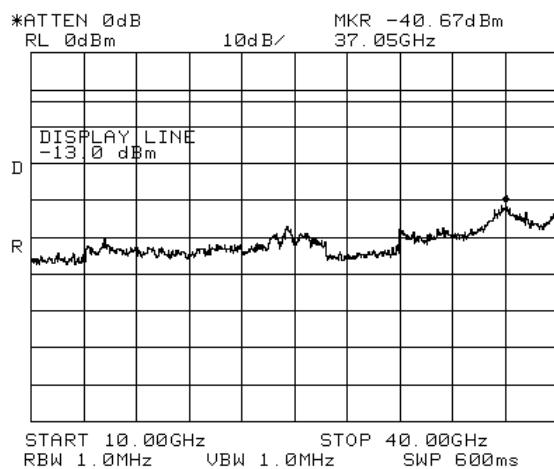


Figure 257 —5180 MHz 64QAM

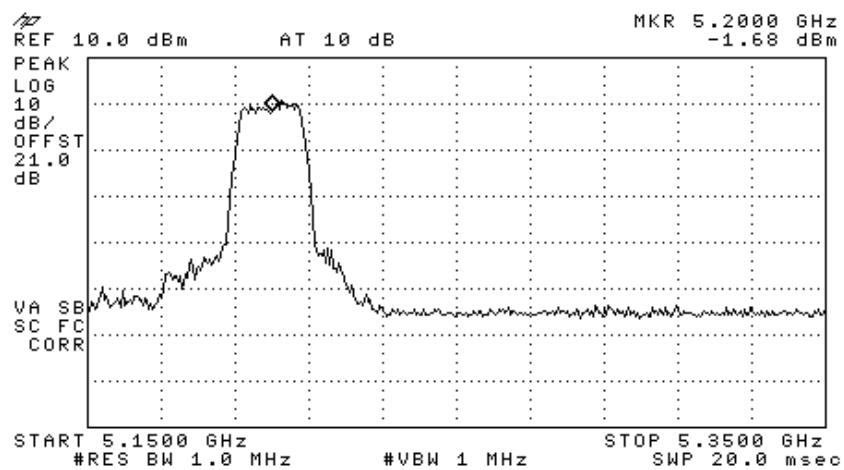


Figure 258 —5200 MHz 64QAM

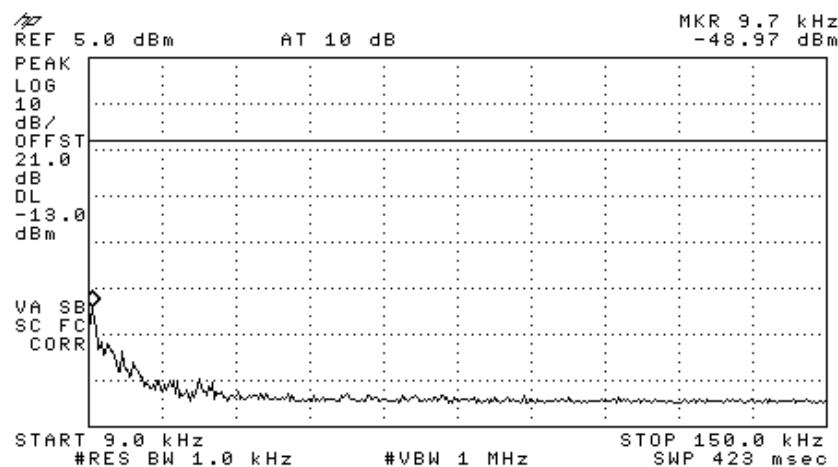


Figure 259 —5200 MHz 64QAM

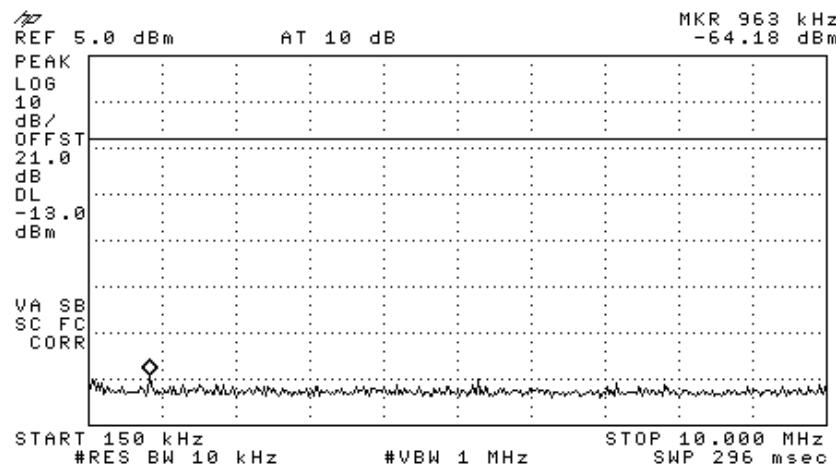


Figure 260 — 5200 MHz 64QAM

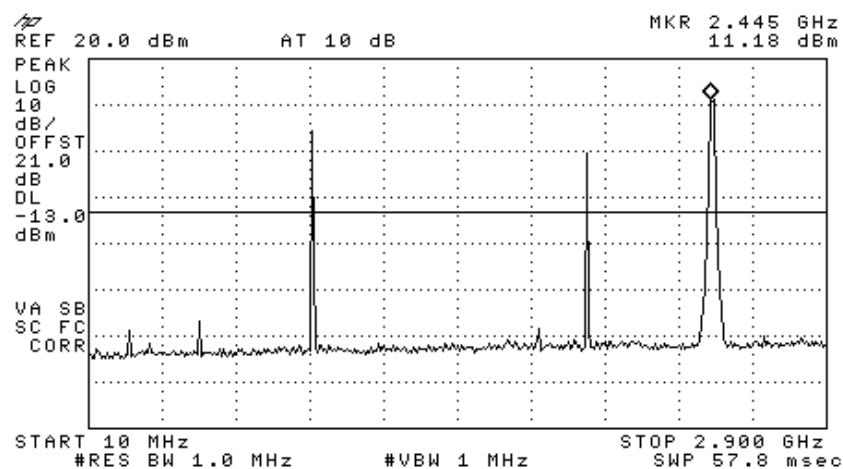


Figure 261 — 5200 MHz 64QAM

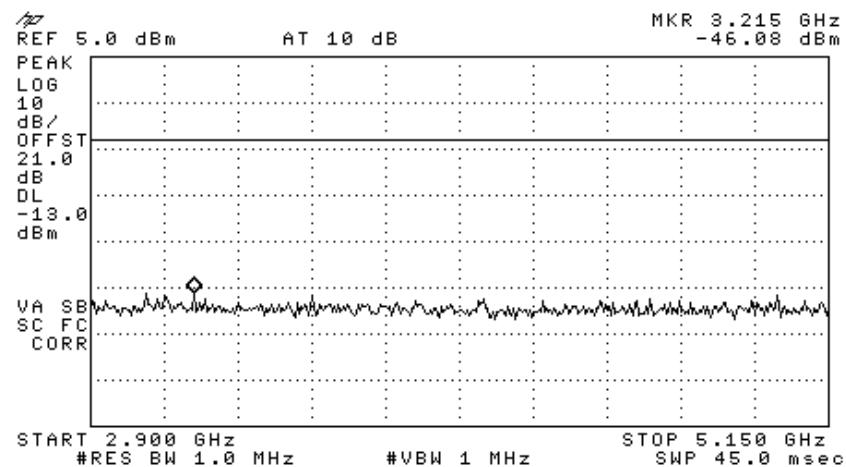


Figure 262 —5200 MHz 64QAM

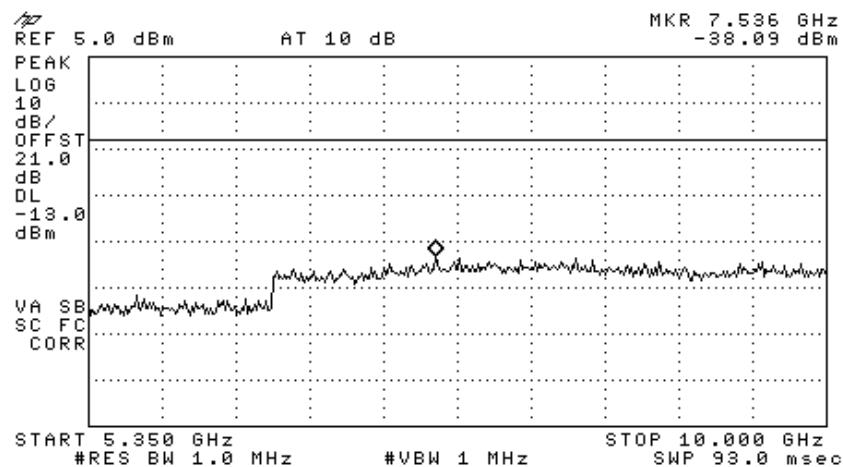


Figure 263 —5200 MHz 64QAM

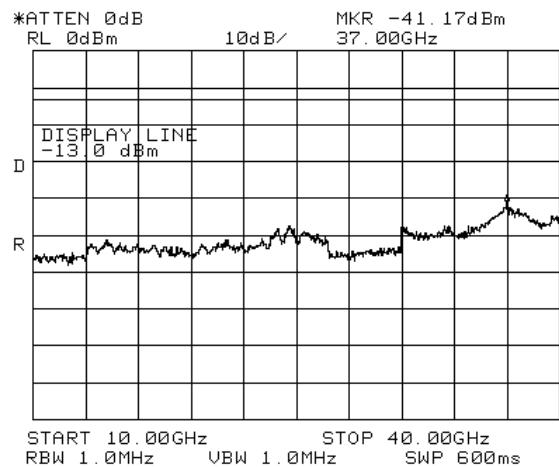


Figure 264 —5200 MHz 64QAM

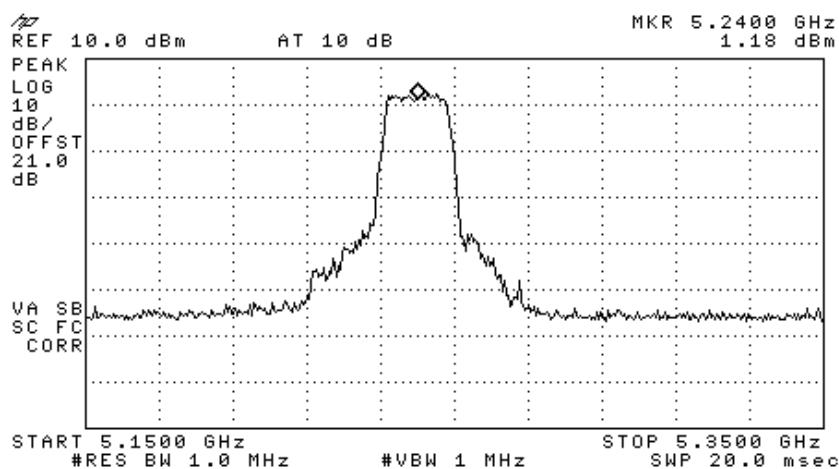


Figure 265 —5240 MHz 64QAM

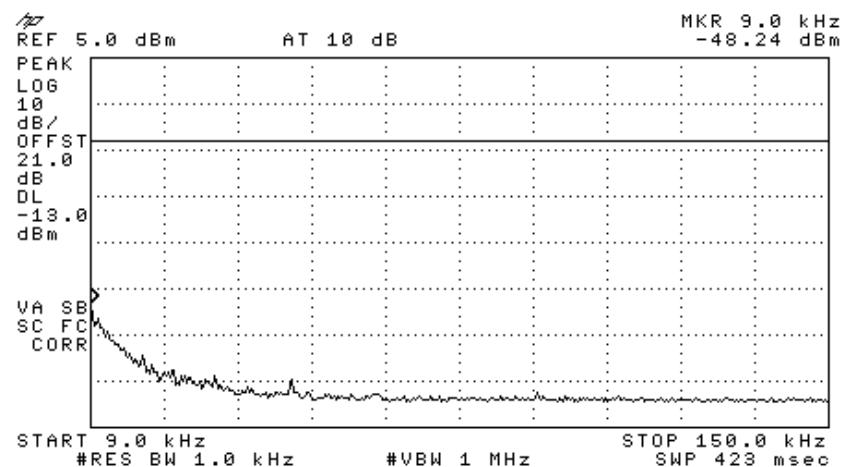


Figure 266 —5240 MHz 64QAM

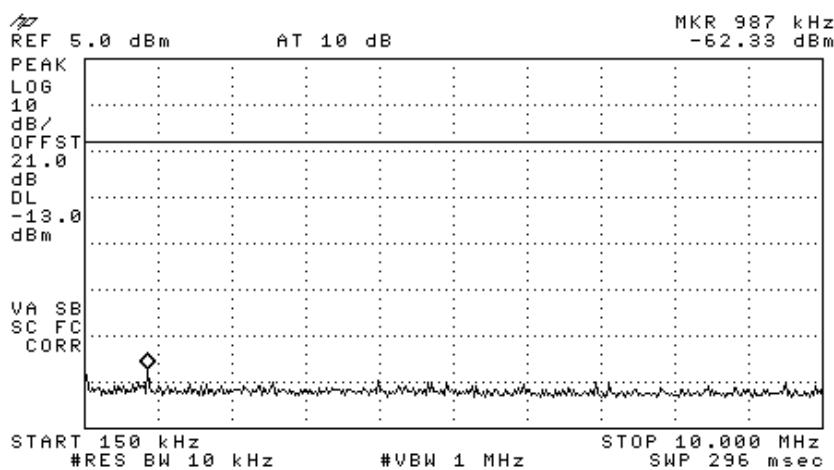


Figure 267 —5240 MHz 64QAM

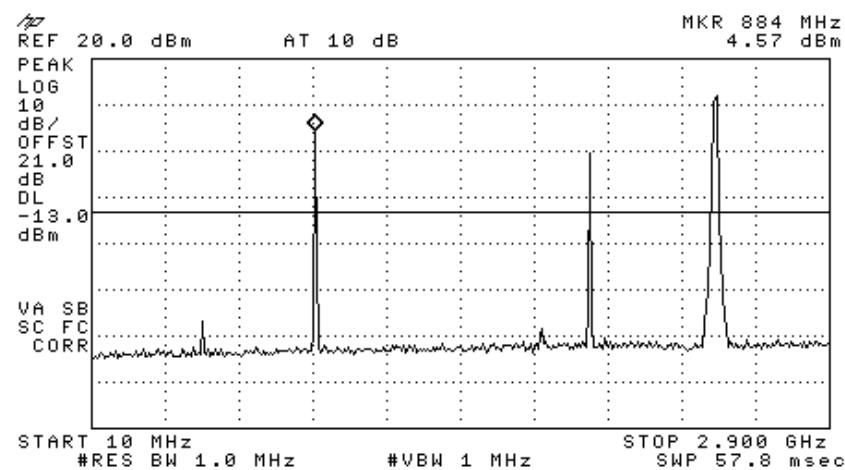


Figure 268 —5240 MHz 64QAM

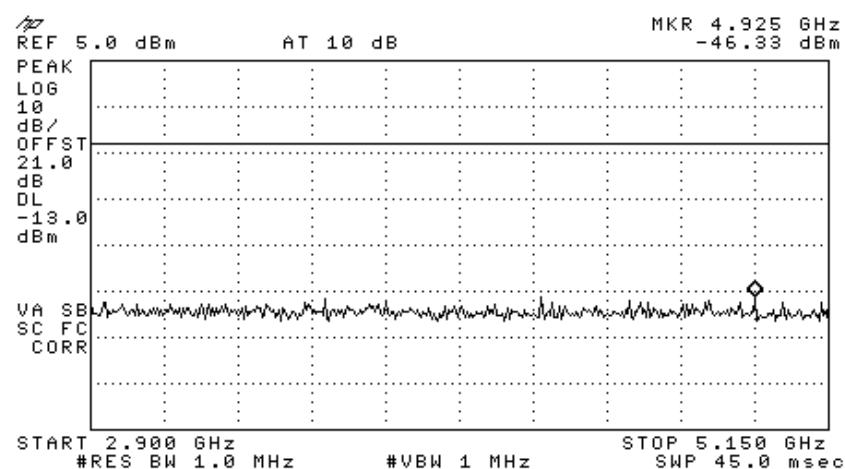


Figure 269 —5240 MHz 64QAM

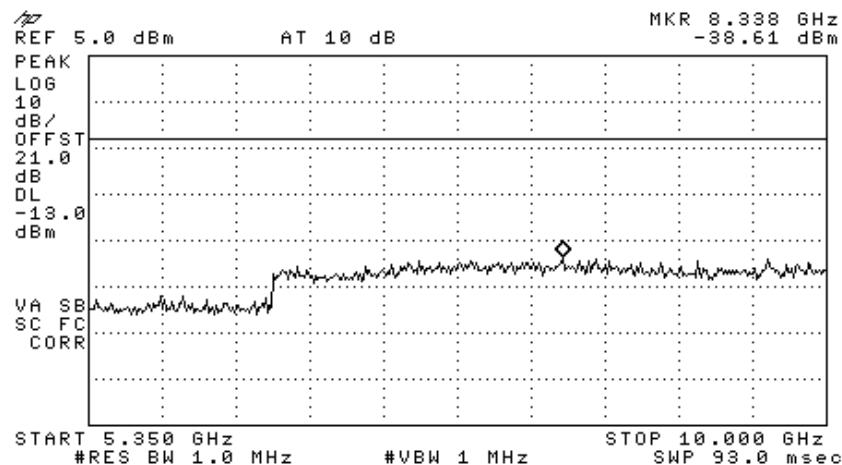


Figure 270 —5240 MHz 64QAM

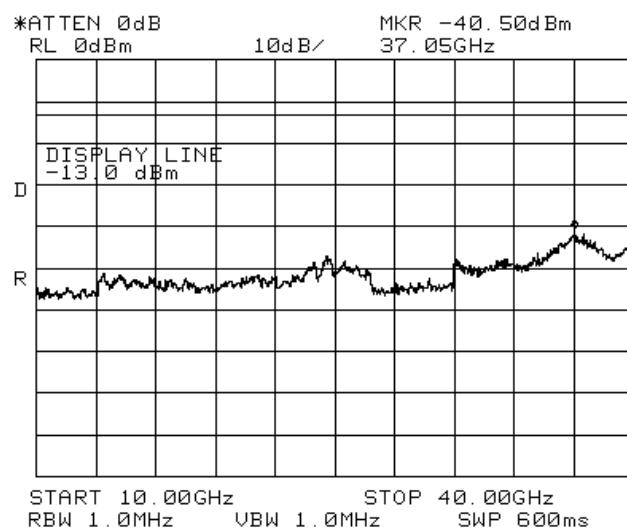


Figure 271 —5240 MHz 64QAM

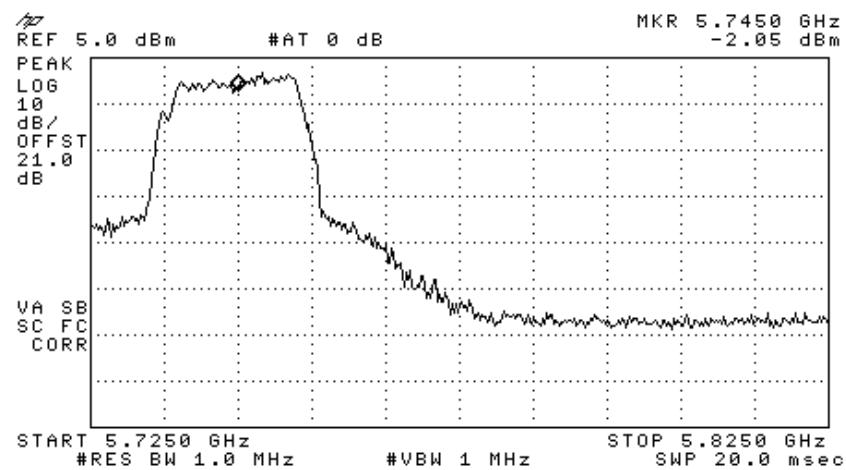


Figure 272 —5745 MHz 64QAM

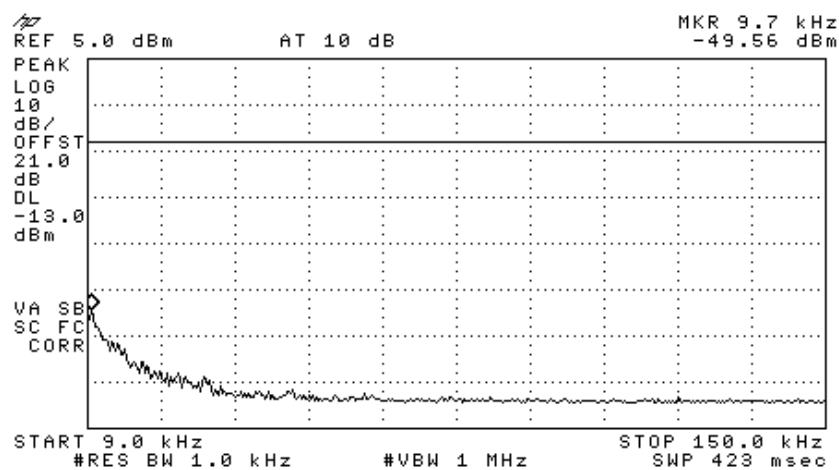


Figure 273 —5745 MHz 64QAM

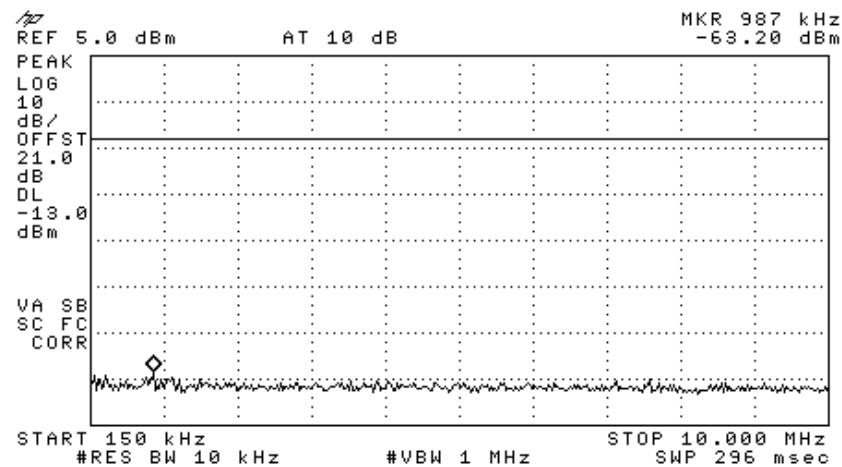


Figure 274 —5745 MHz 64QAM

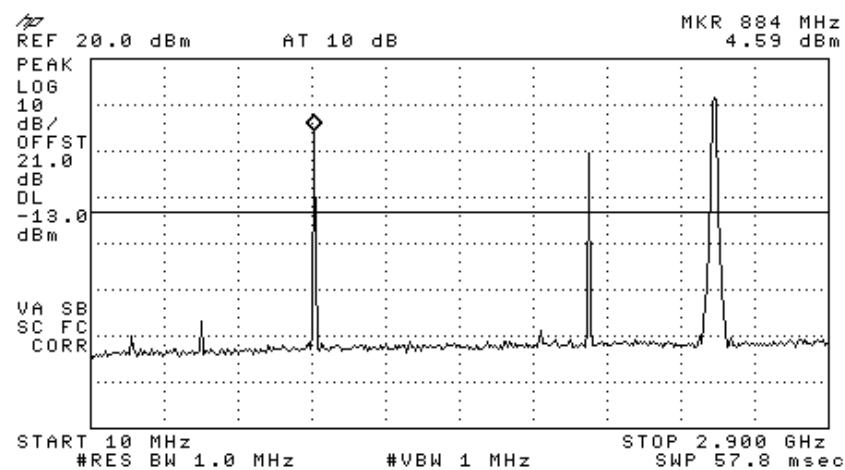


Figure 275 —5745 MHz 64QAM

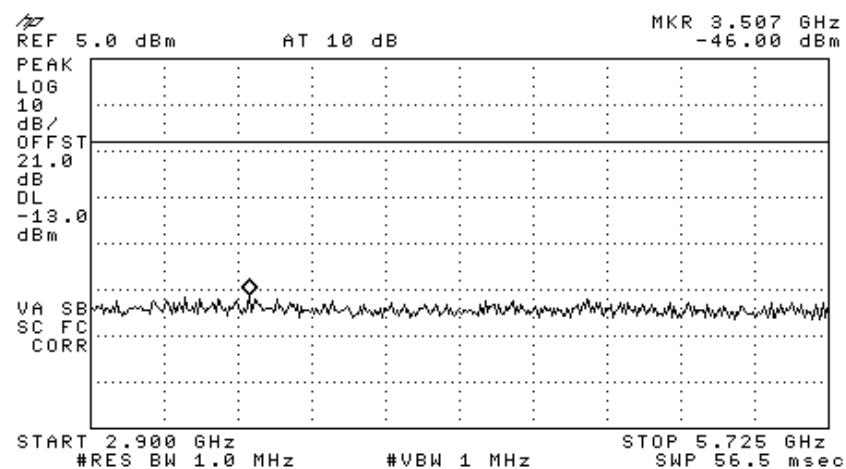


Figure 276 —5745 MHz 64QAM

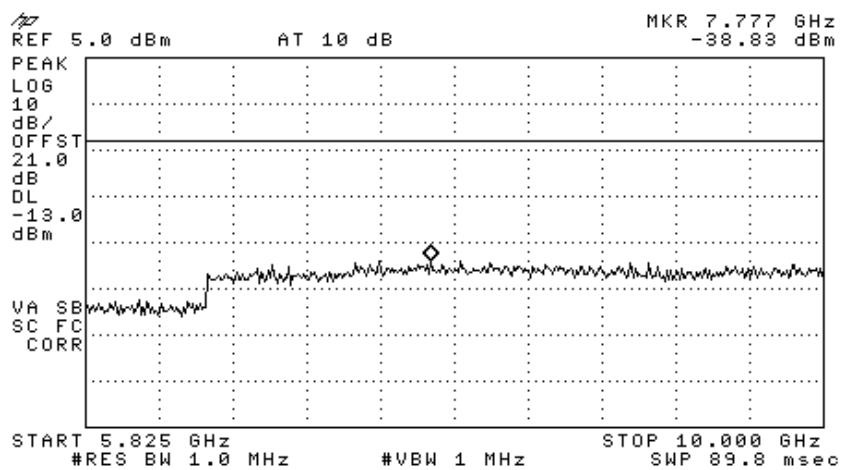


Figure 277 —5745 MHz 64QAM

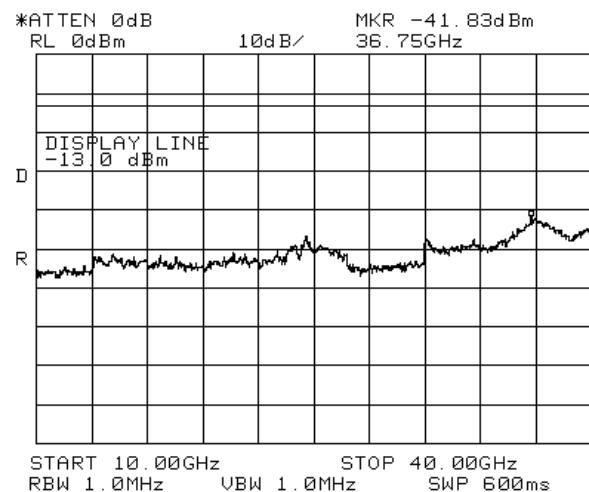


Figure 278 —5745 MHz 64QAM

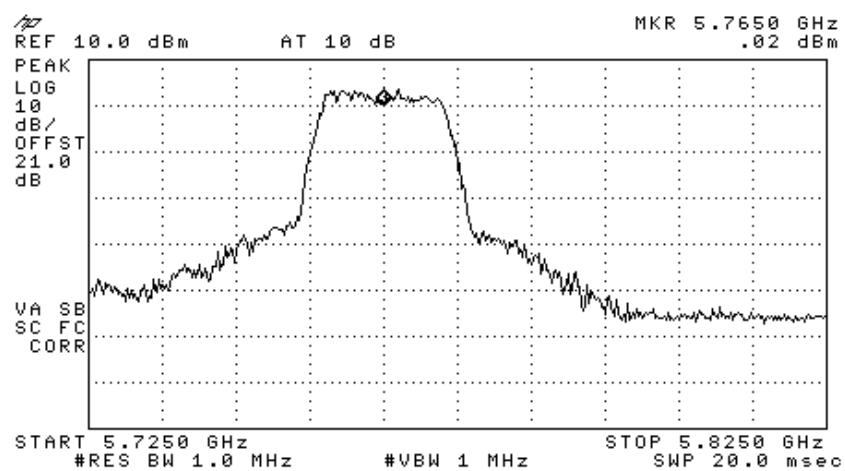


Figure 279 —5765 MHz 64QAM

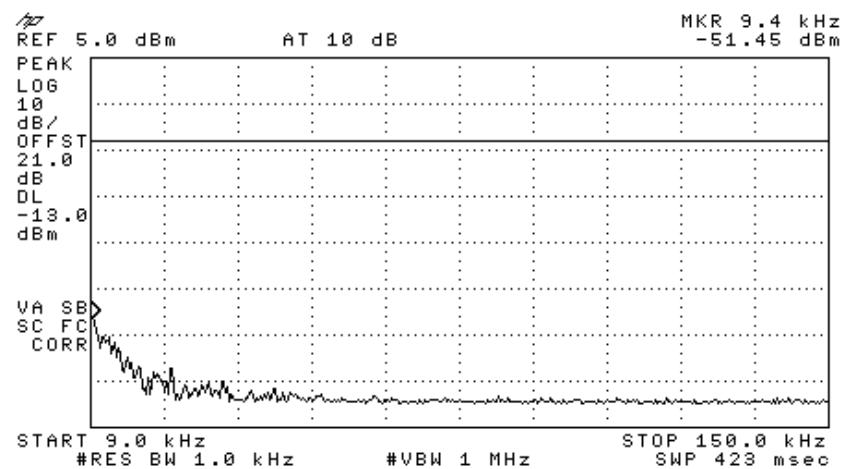


Figure 280 — 5765 MHz 64QAM

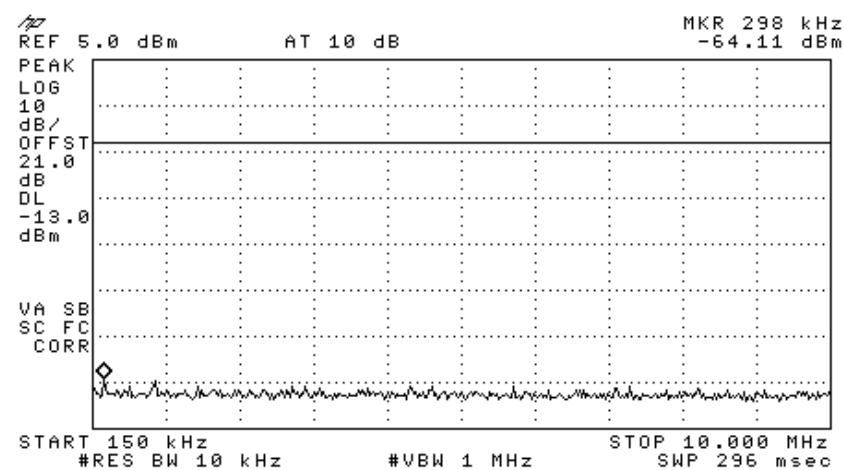


Figure 281 — 5765 MHz 64QAM

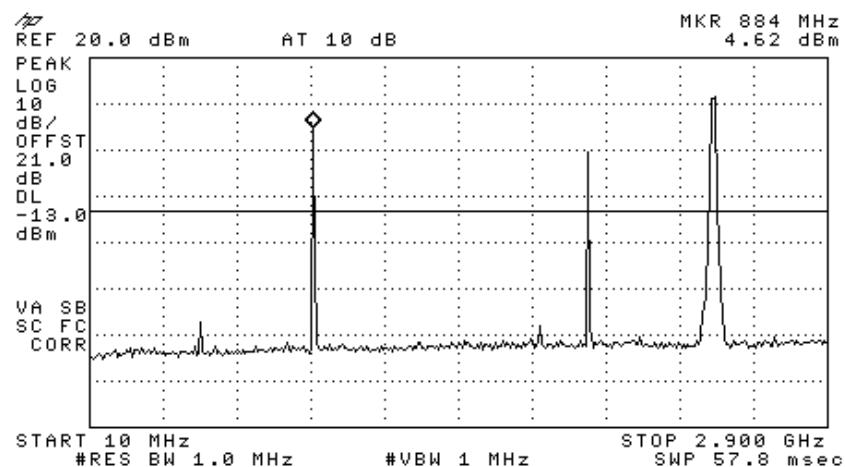


Figure 282 —5745 MHz 64QAM

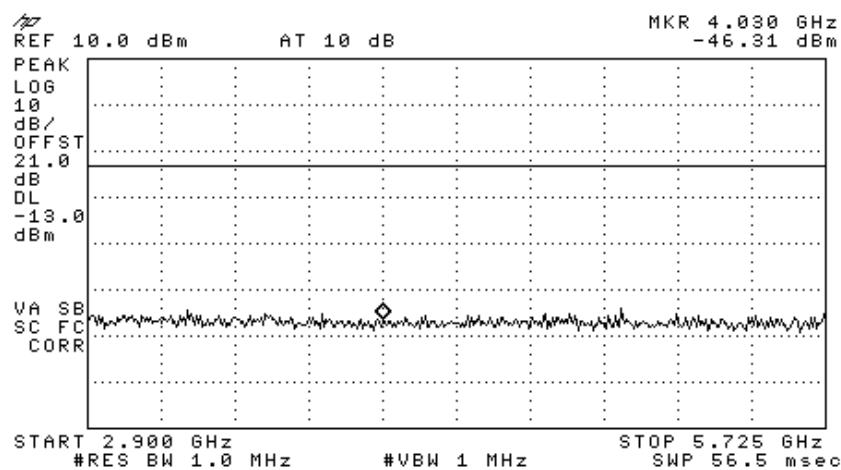


Figure 283 —5765 MHz 64QAM

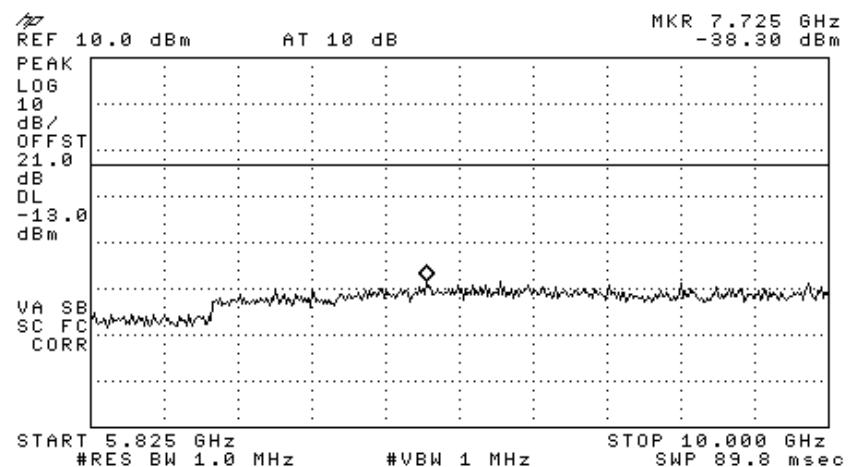


Figure 284 —5765 MHz 64QAM

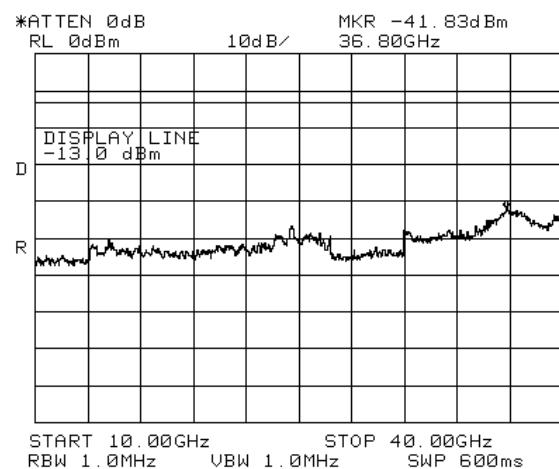


Figure 285 —5765 MHz 64QAM

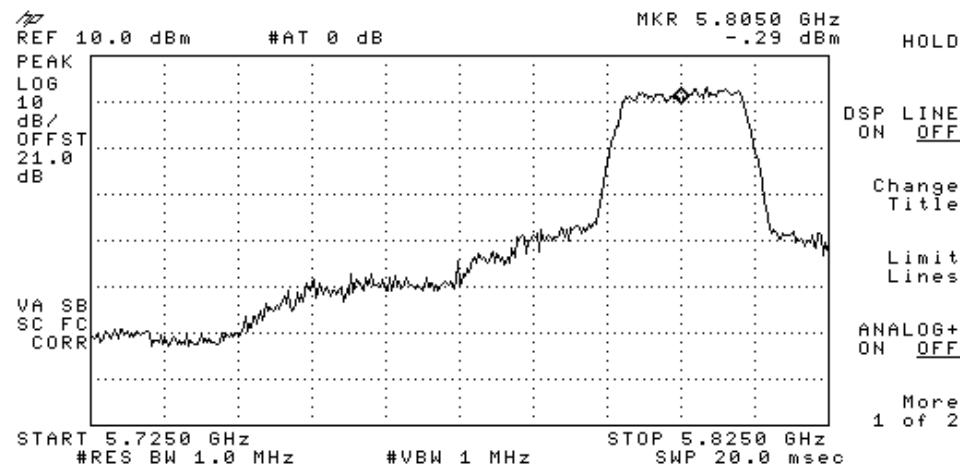


Figure 286 —5805 MHz 64QAM

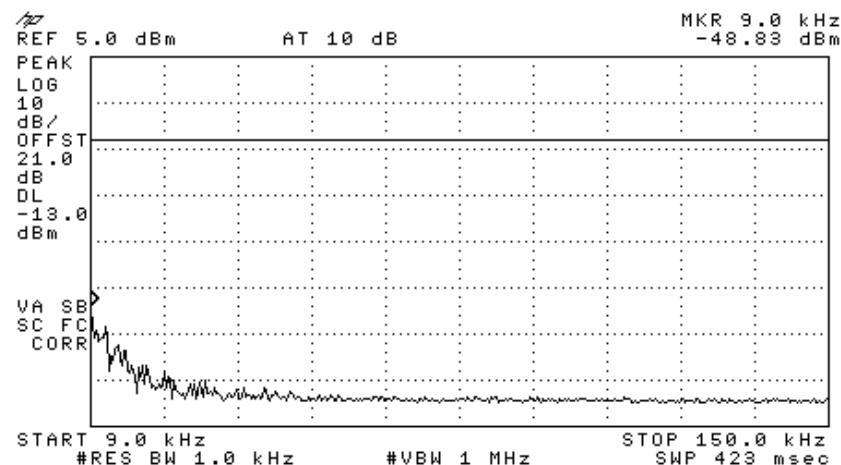


Figure 287 —5805 MHz 64QAM

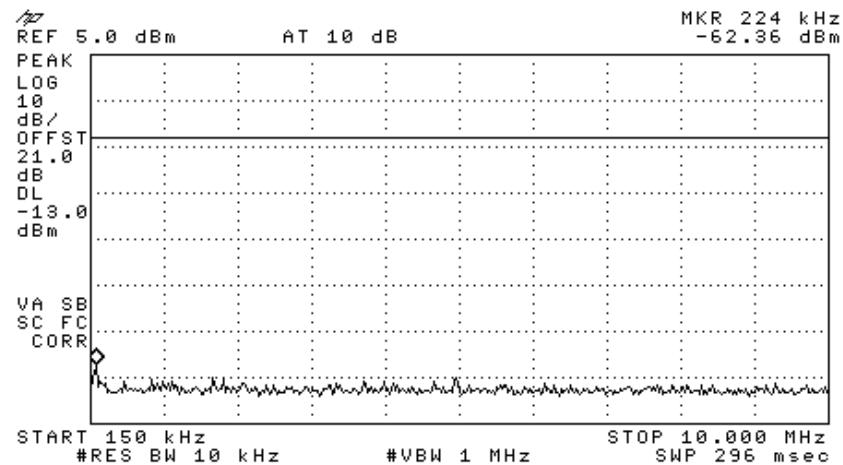


Figure 288 —5805 MHz 64QAM

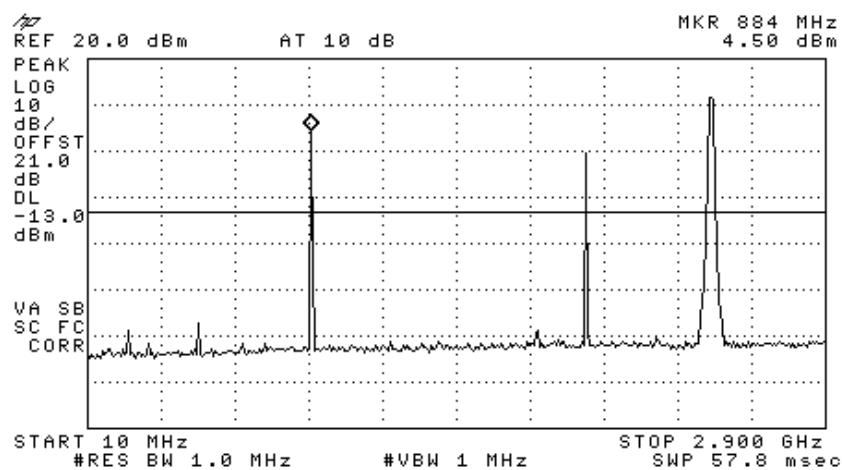


Figure 289 —5805 MHz 64QAM

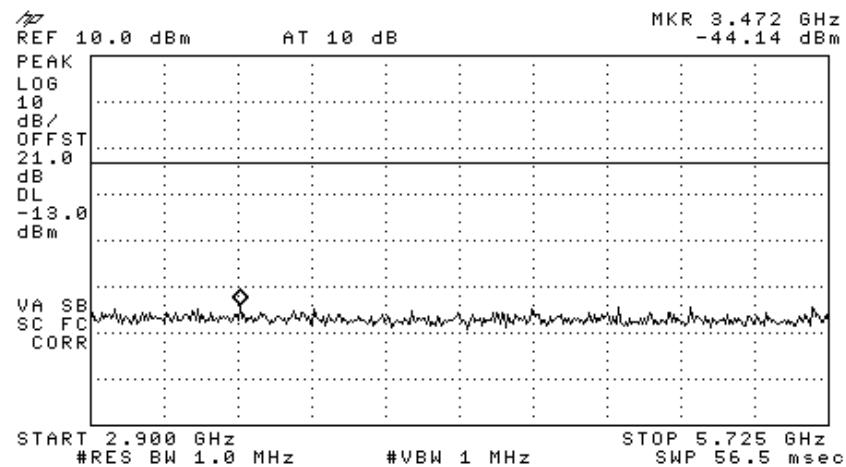


Figure 290 —5805 MHz 64QAM

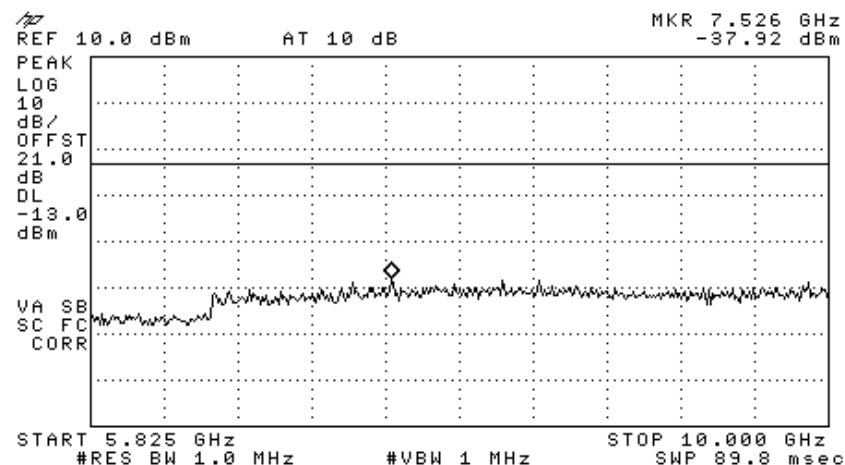


Figure 291 —5805 MHz 64QAM

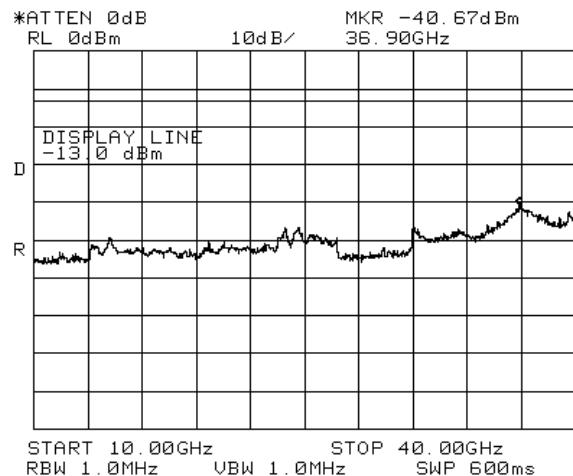


Figure 292 —5805 MHz 64QAM

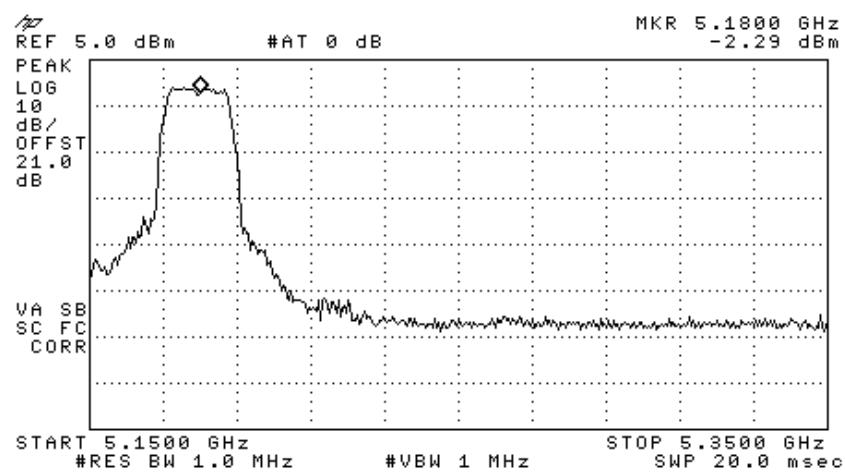


Figure 293 —5180 MHz BPSK

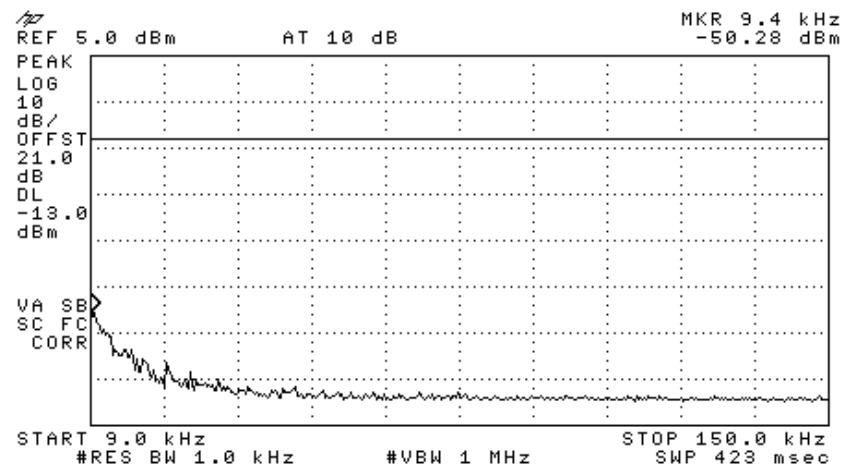


Figure 294 —5180 MHz BPSK

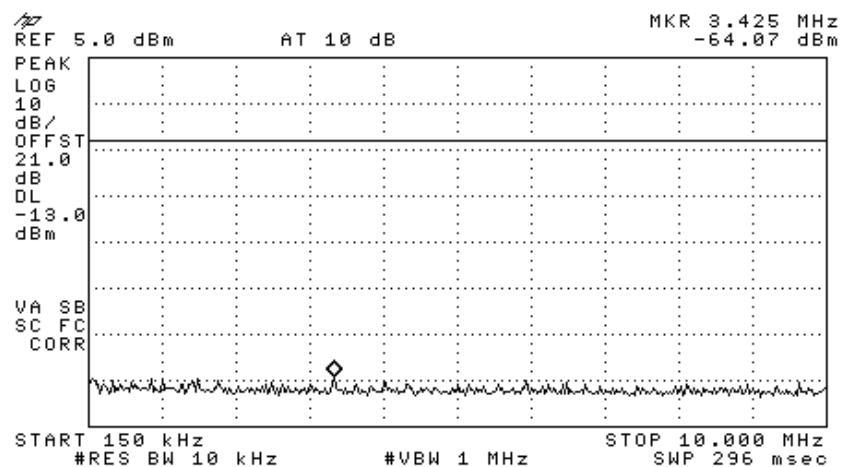


Figure 295 —5180 MHz BPSK

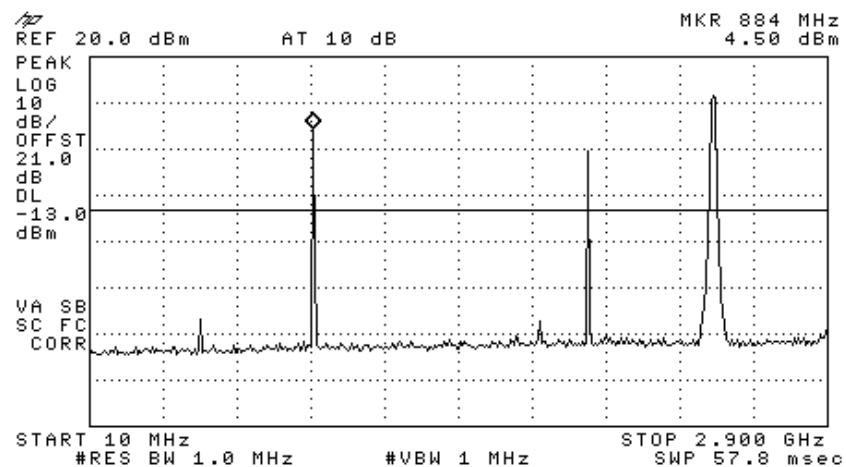


Figure 296 —5180 MHz BPSK

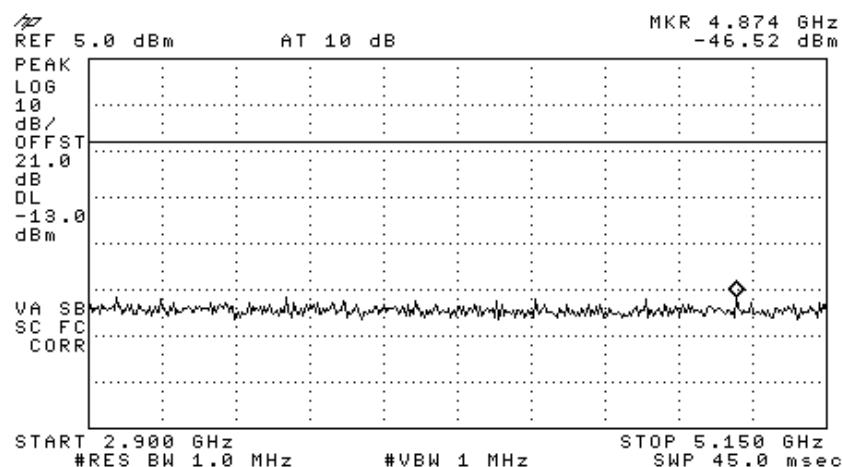


Figure 297 —5180 MHz BPSK

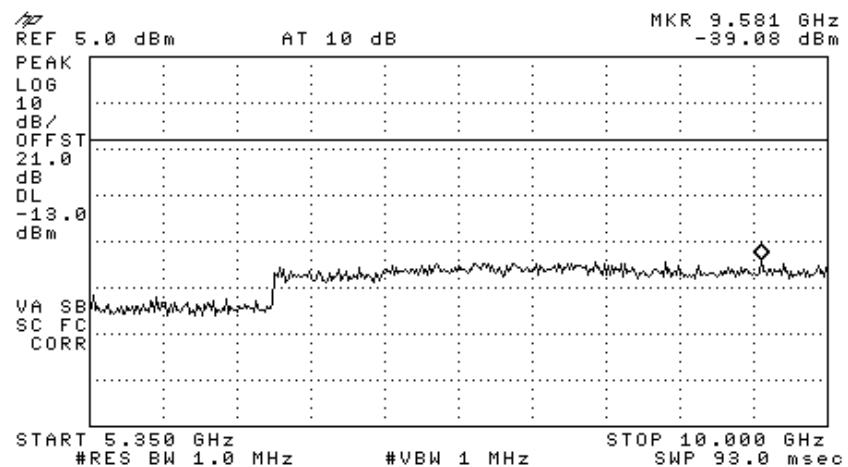


Figure 298 —5180 MHz BPSK

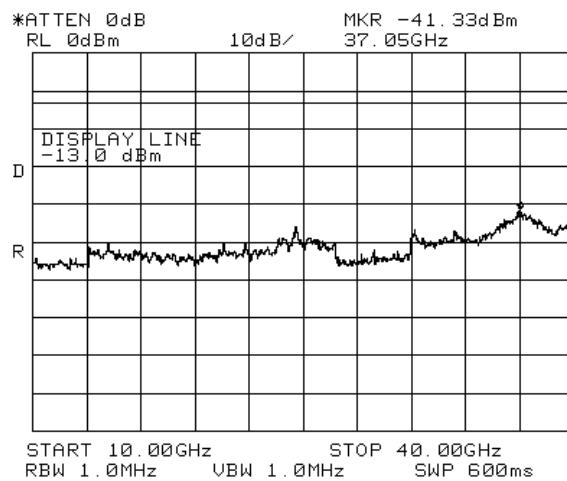


Figure 299 —5180 MHz BPSK

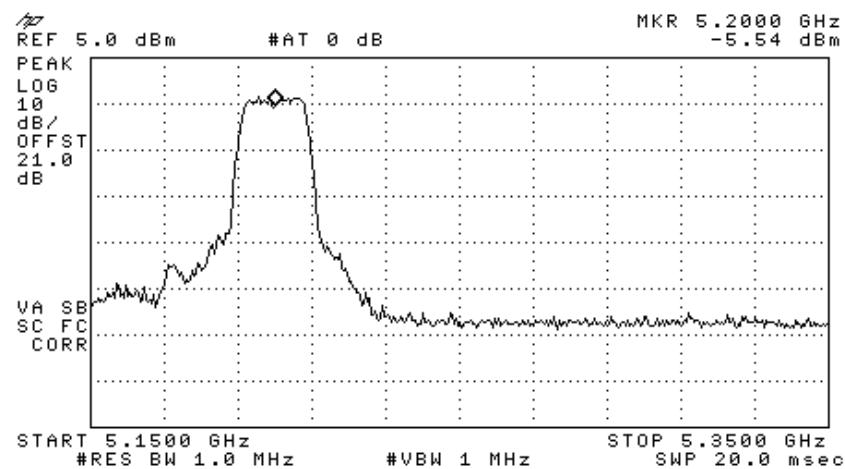


Figure 300 —5200 MHz BPSK

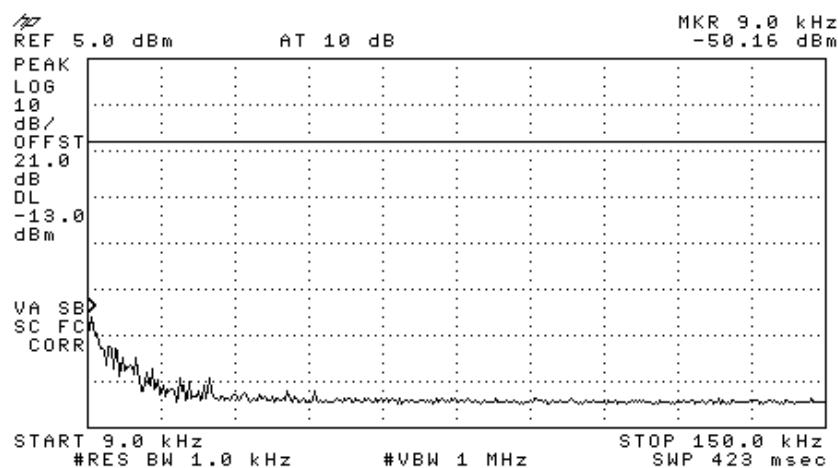


Figure 301 —5200 MHz BPSK

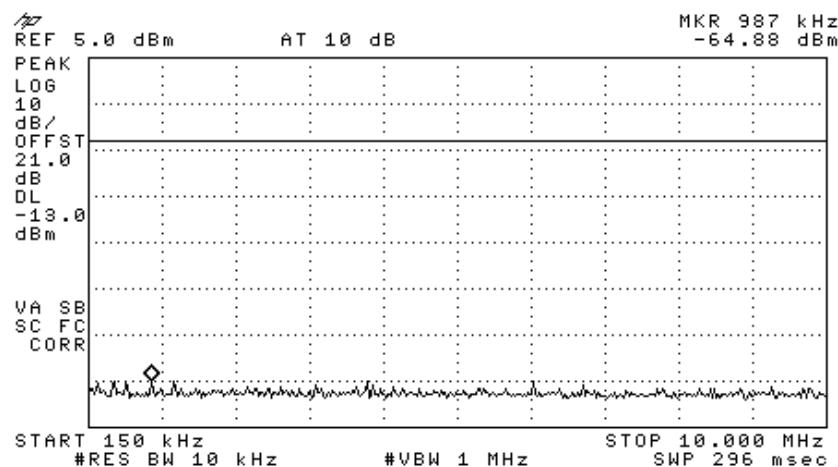


Figure 302 —5200 MHz BPSK

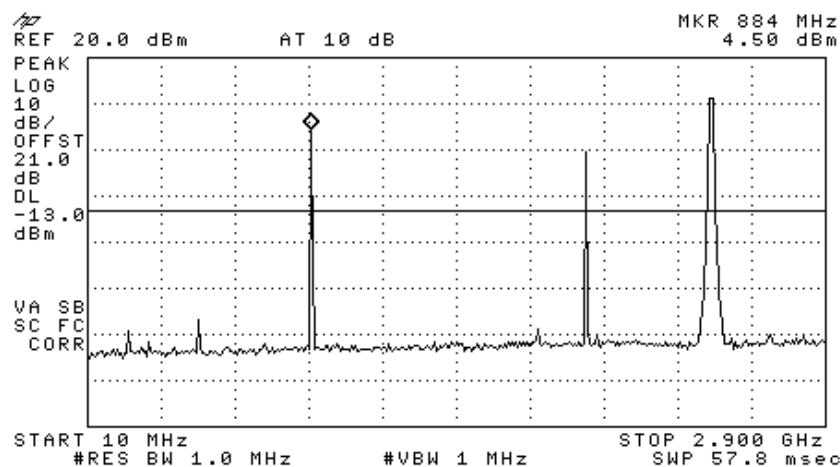


Figure 303 —5200 MHz BPSK

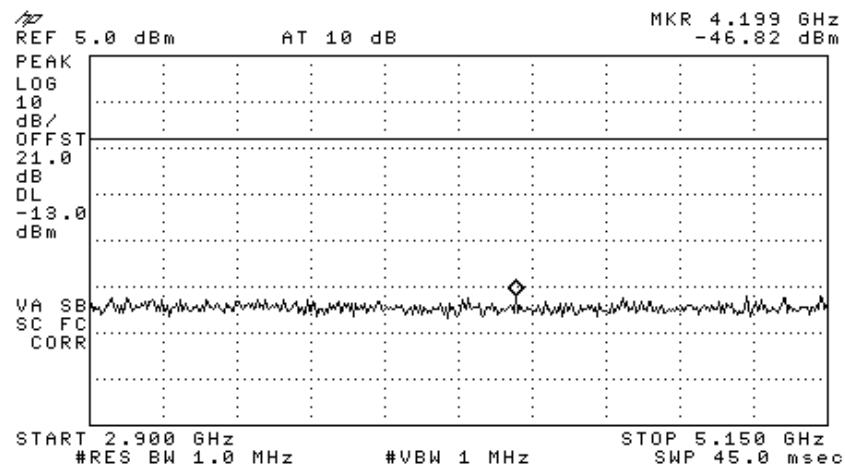


Figure 304 —5200 MHz BPSK

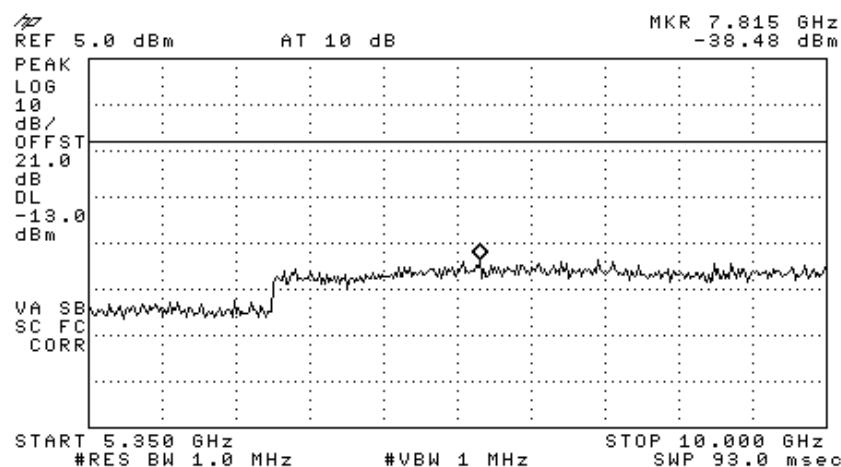


Figure 305 —5200 MHz BPSK

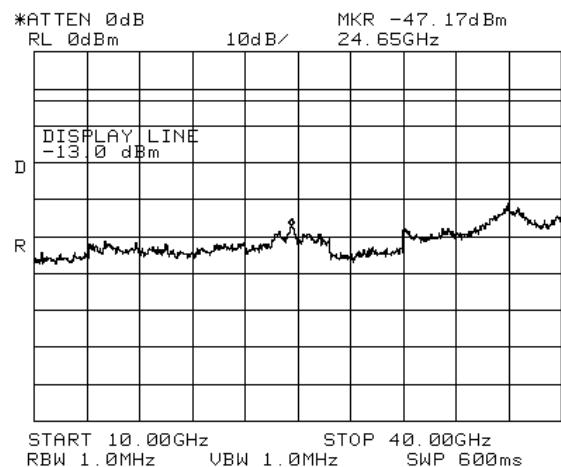


Figure 306 —5200 MHz BPSK

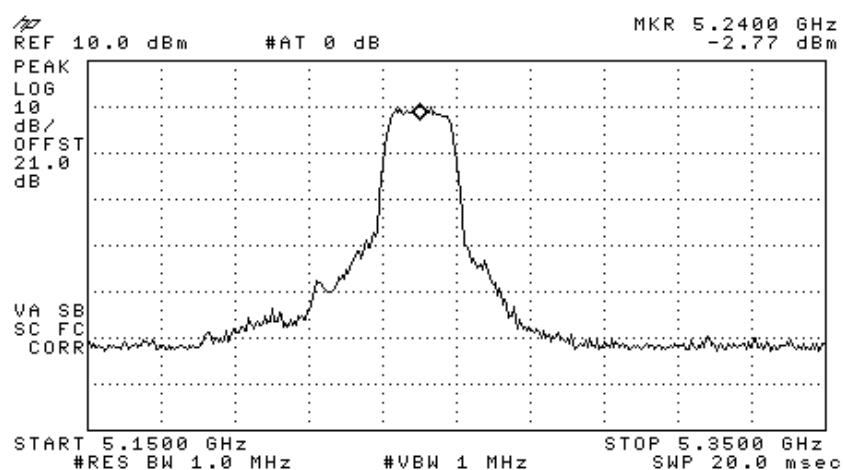


Figure 307 —5240 MHz BPSK

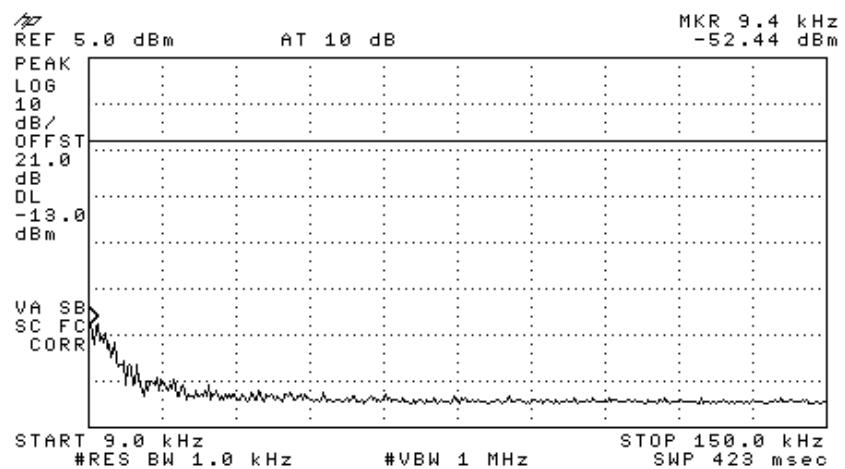


Figure 308 —5240 MHz BPSK

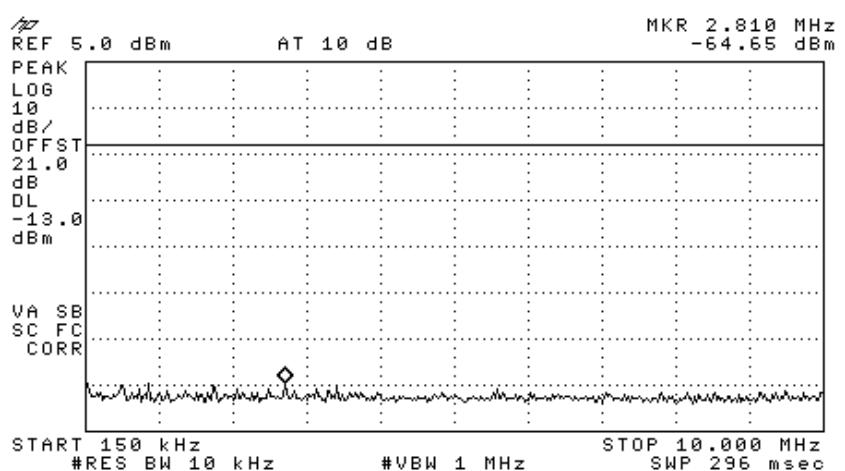


Figure 309 —5240 MHz BPSK

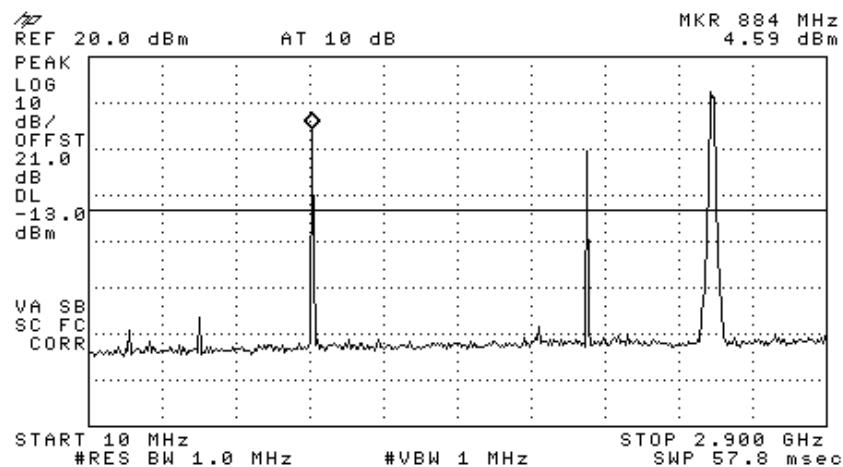


Figure 310 — 5240 MHz BPSK

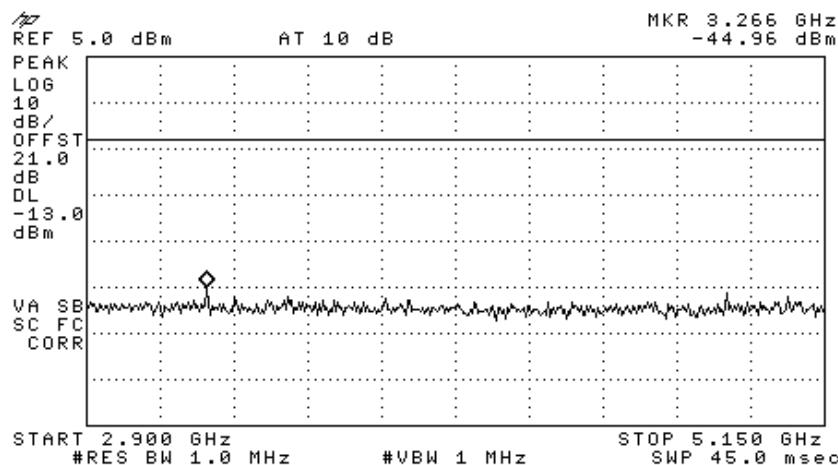


Figure 311 — 5240 MHz BPSK

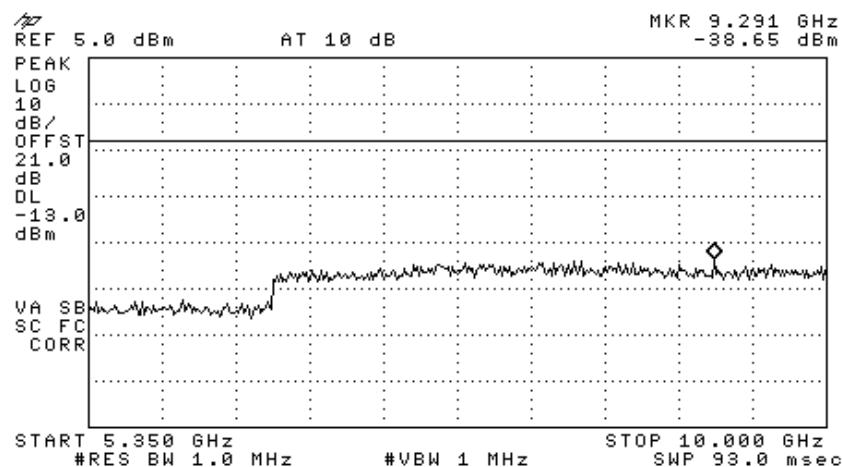


Figure 312 —5240 MHz BPSK

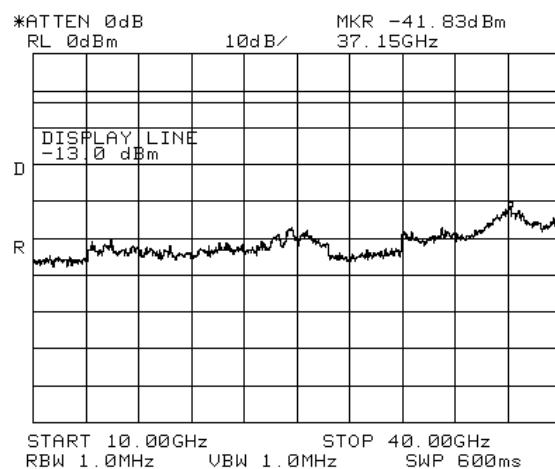


Figure 313 —5240 MHz BPSK

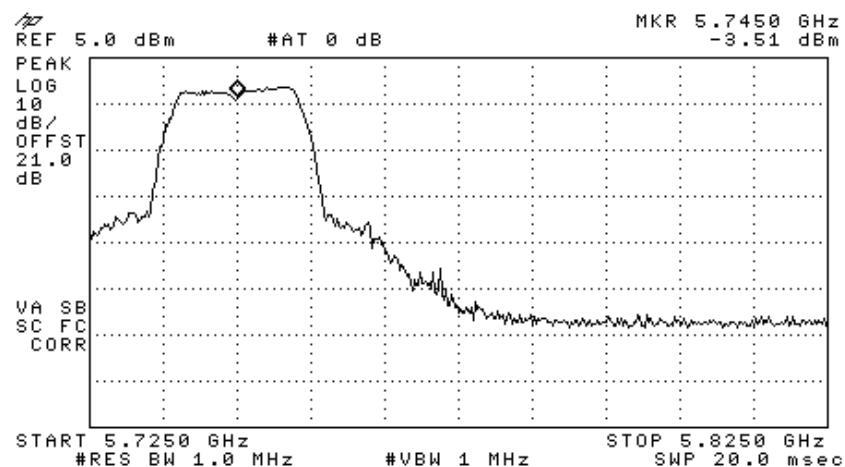


Figure 314 —5745 MHz BPSK

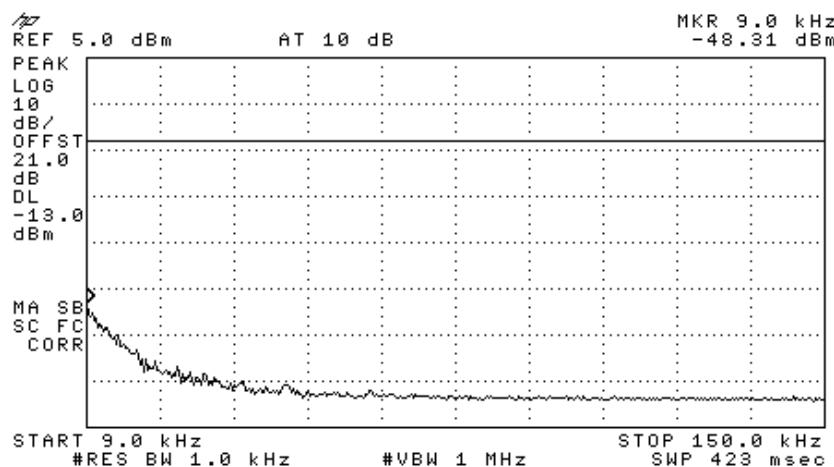


Figure 315 —5745 MHz BPSK

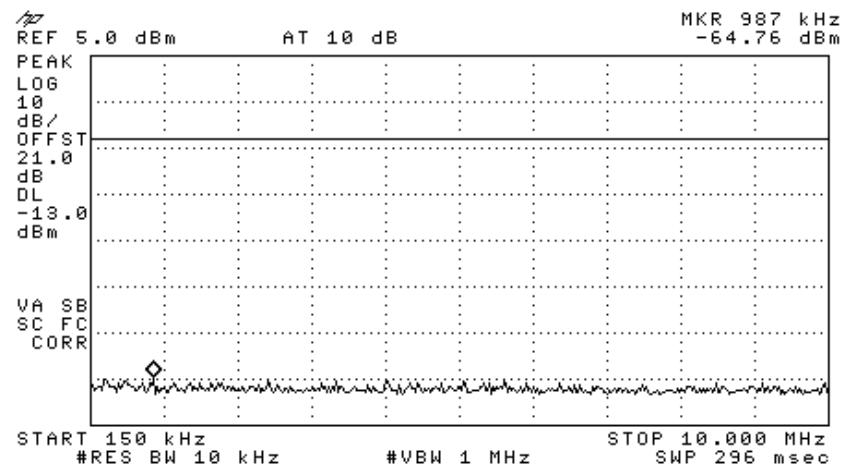


Figure 316 —5745 MHz BPSK

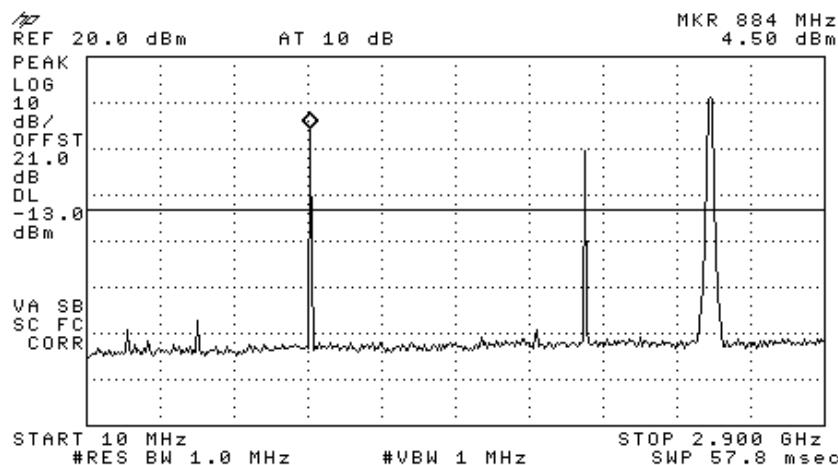


Figure 317 —5745 MHz BPSK

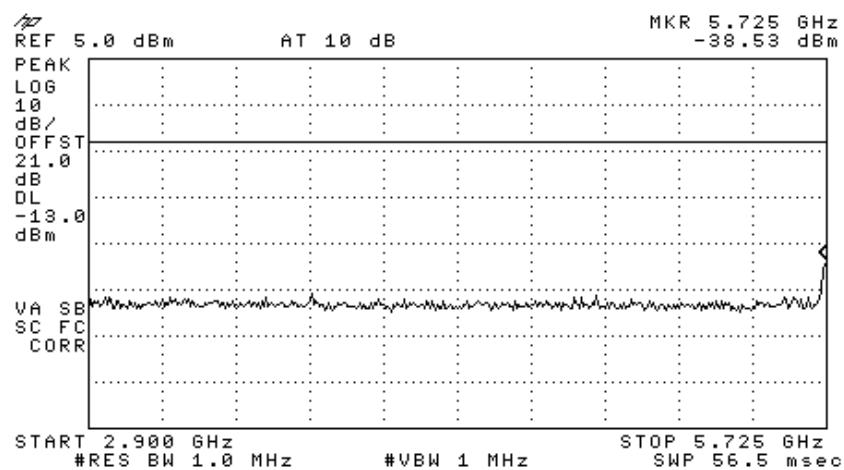


Figure 318 —5745 MHz BPSK

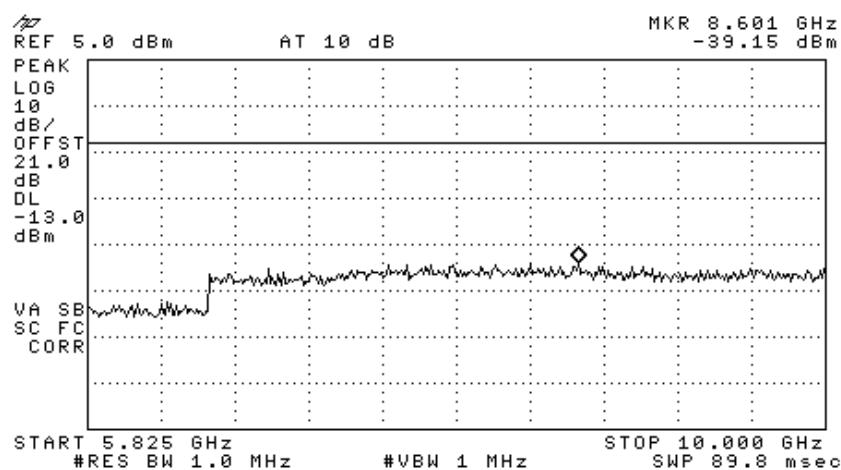


Figure 319 —5745 MHz BPSK

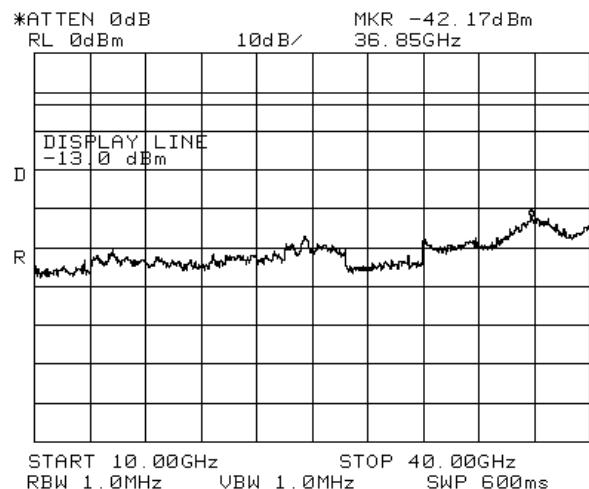


Figure 320 —5745 MHz BPSK

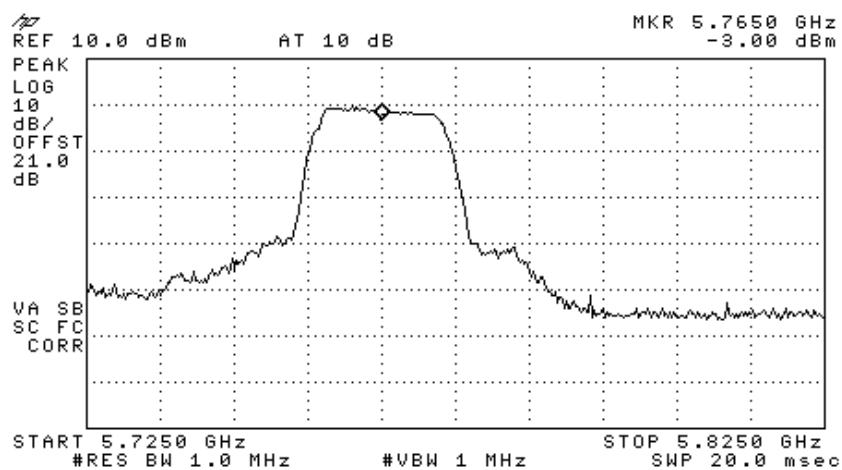


Figure 321 —5765 MHz BPSK

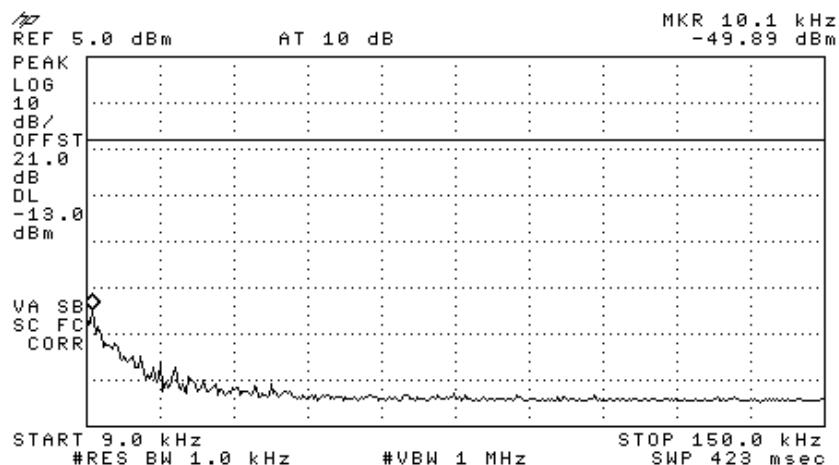


Figure 322 —5765 MHz BPSK

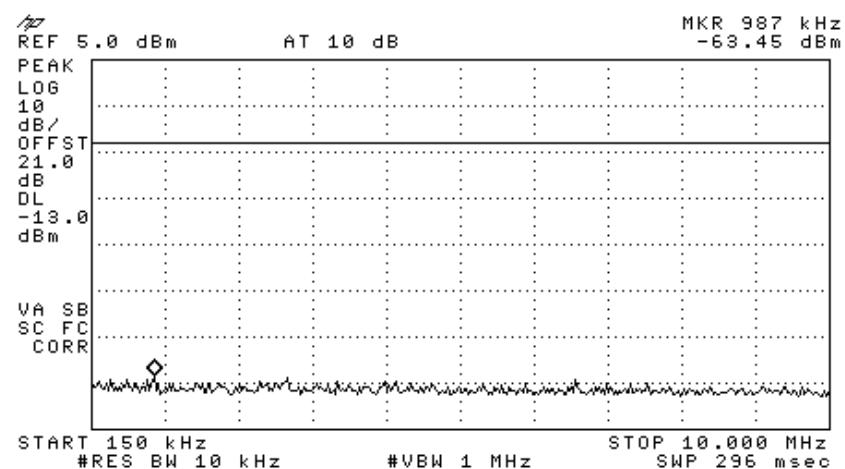


Figure 323 —5765 MHz BPSK

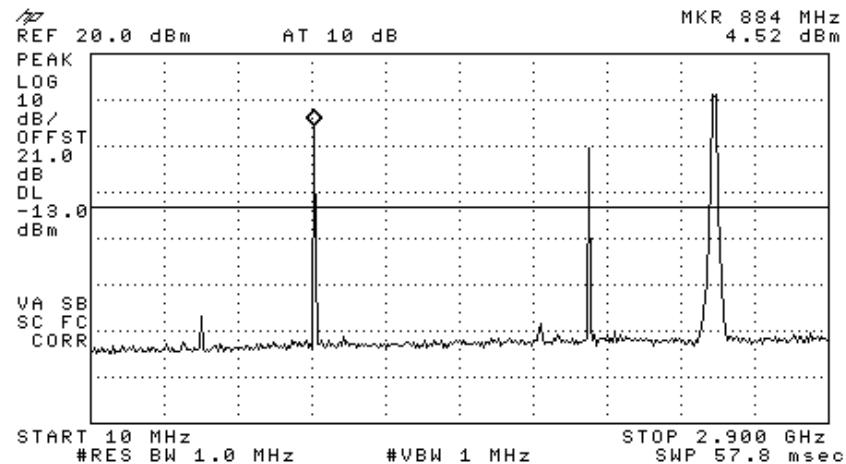


Figure 324 —5765 MHz BPSK

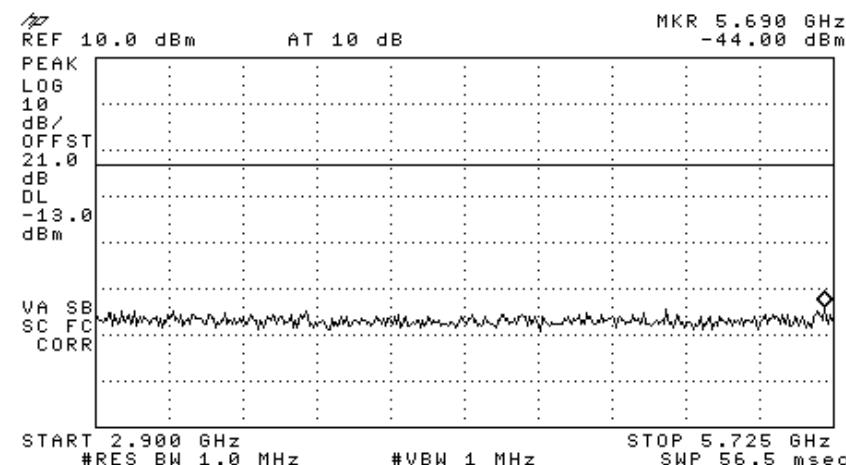


Figure 325 —5765 MHz BPSK

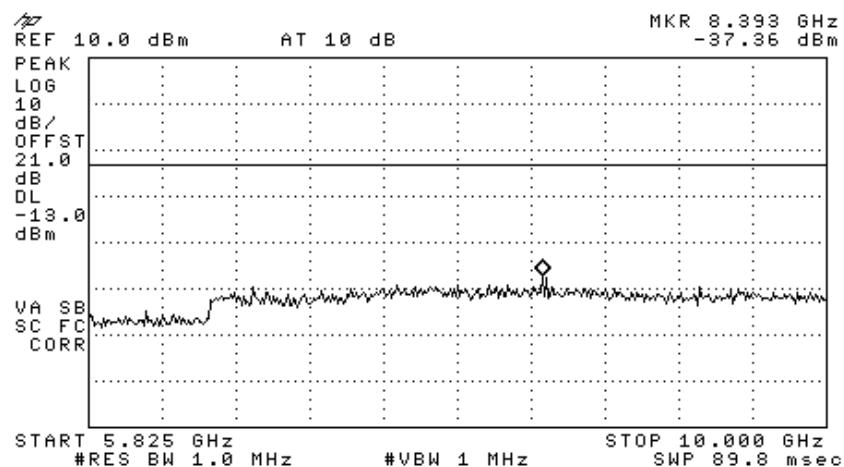


Figure 326 —5765 MHz BPSK

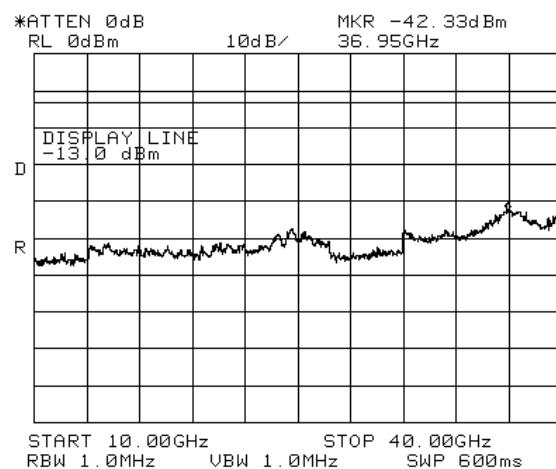


Figure 327 —5765 MHz BPSK

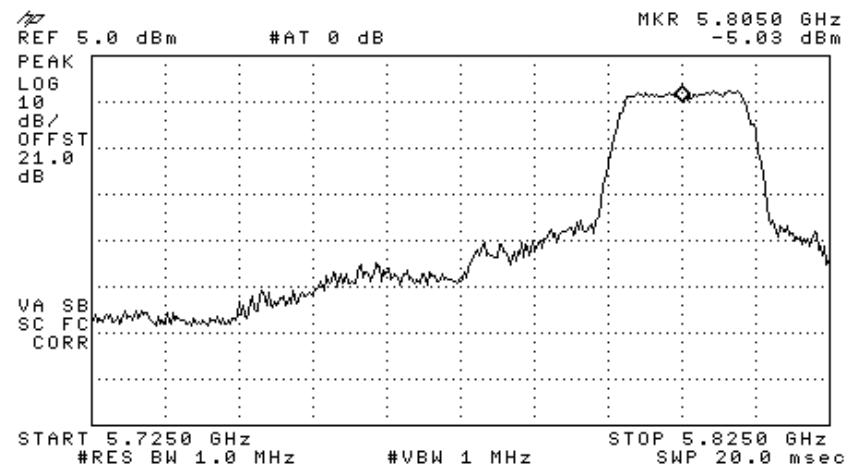


Figure 328 —5805 MHz BPSK

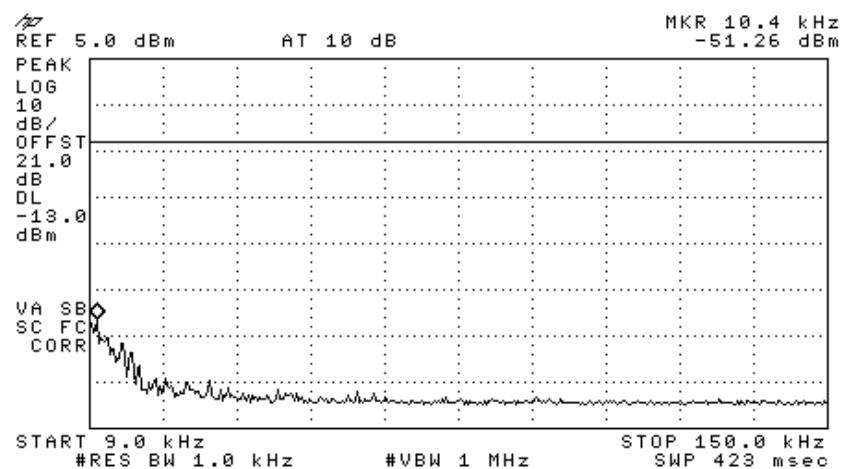


Figure 329 —5805 MHz BPSK

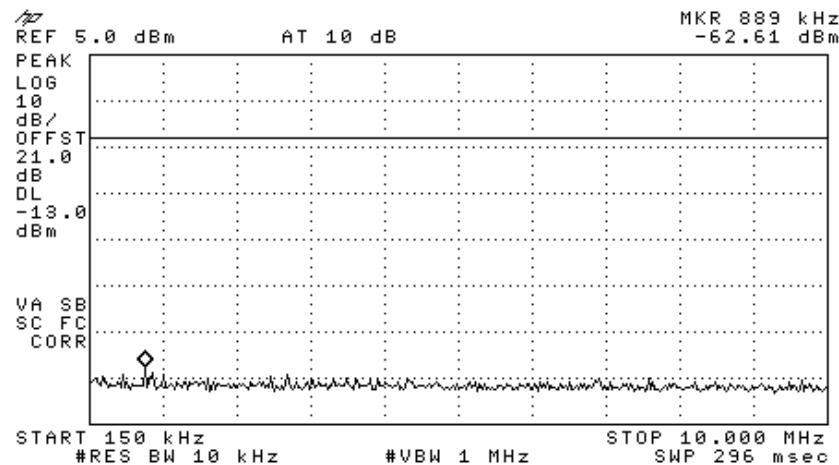


Figure 330 —5805 MHz BPSK

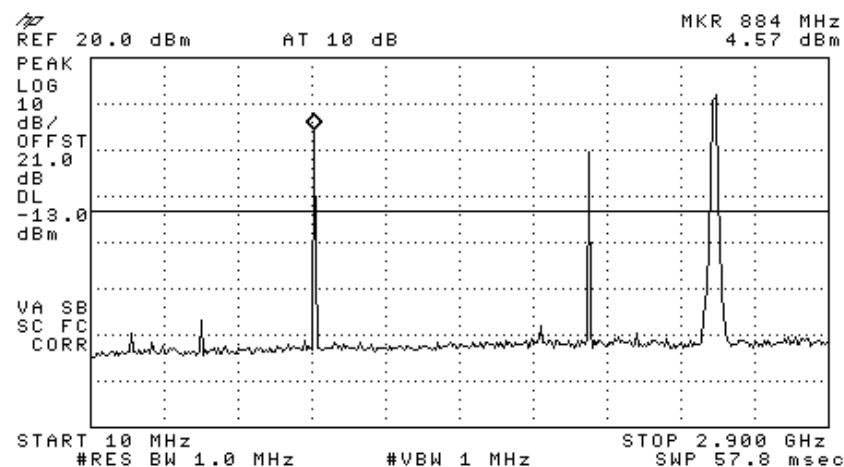


Figure 331 —5805 MHz BPSK

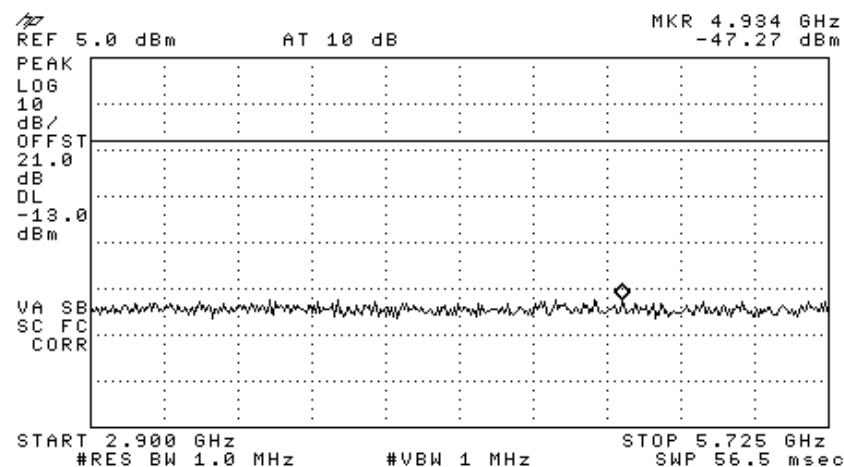


Figure 332 —5805 MHz BPSK

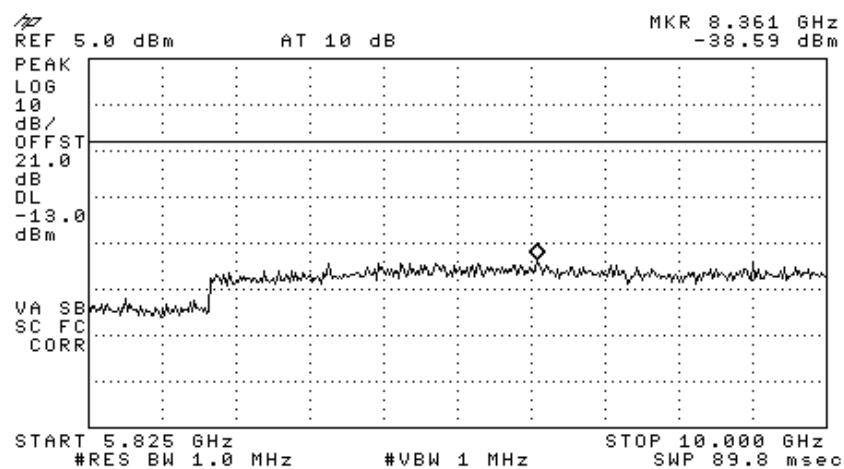


Figure 333 —5805 MHz BPSK

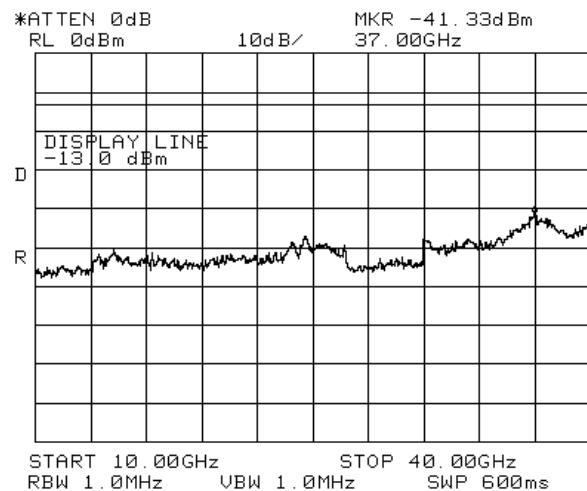


Figure 334 —5805 MHz BPSK

21.2 Results table

E.U.T Description: WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points

Model No.: 860M With WCE

Serial Number: 1. 860M: 73903D 2. WCE: 739038

Specification: F.C.C. Part 15, Subpart E

Operation Frequency (MHz)	Modulation	Reading (dBm)	Specification (dBm)	Margin (dB)
5180	64QAM	-38.39	-13.0	-25.39
	BPSK	-39.08	-13.0	-26.08
5200	64QAM	-38.09	-13.0	-25.09
	BPSK	-38.48	-13.0	-25.48
5240	64QAM	-38.61	-13.0	-25.61
	BPSK	-38.65	-13.0	-25.65
5745	64QAM	-38.83	-13.0	-28.83
	BPSK	-38.53	-13.0	-25.53
5765	64QAM	-38.30	-13.0	-25.30
	BPSK	-37.36	-13.0	-24.36
5805	64QAM	-37.92	-13.0	-24.92
	BPSK	-38.59	-13.0	-25.59

Figure 335 Peak Power Output of 5150-5250; 5725-5825 MHz Bands

JUDGEMENT: Passed by 24.36 dB

TEST PERSONNEL:

Tester Signature: E. Pitt Date: 28.02.08

Typed/Printed Name: E. Pitt

21.3 **Test Equipment Used.**

Peak Power Output of 5150-5825 MHz Band

Instrument	Manufacturer	Model	Serial/Part Number	Calibration	
				Last Calibr.	Period
Spectrum Analyzer	HP	8592L	3826A01204	February 22, 2007	1 year
Spectrum Analyzer	HP	8564E	3442A00275	November 14, 2007	1 year
Attenuator	Jyebao	-	FAT-AM5AF5G6G2W20	May 9, 2007	1 year
Cable	Rhophase	KPS-5000-KPS	A1674	February 8, 2008	1 year

Figure 336 Test Equipment Used

22. Band Edge Spectrum 5GHz Transmitter 802.11b/g+802.11a + CELL + PCS Signals

[In Accordance with section 15.407)

22.1 Test procedure

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator (20 dB) and an appropriate coaxial cable (cable loss = 1 dB). The spectrum analyzer was set to 1 MHz resolution BW. Maximum power level below 5150 MHz and above 5350 MHz was measured at 5180 MHz and 5240MHz correspondingly. Maximum power level below 5725 MHz and above 5825 MHz was measured at 5745 MHz and 5805 MHz correspondingly.

The E.U.T. was tested at 5180, 5240, 5745, and 5805 MHz with the following modulations: 64QAM (54Mbit/sec) and BPSK (6Mbit/sec).

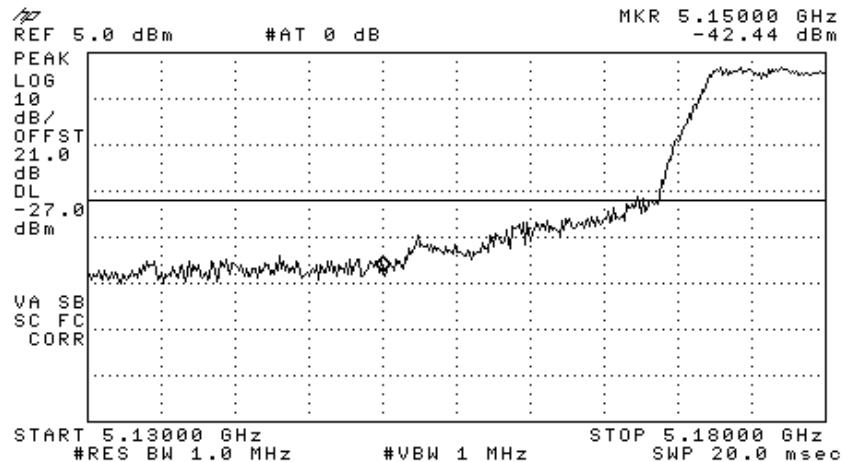


Figure 337 — 5180 MHz 64QAM

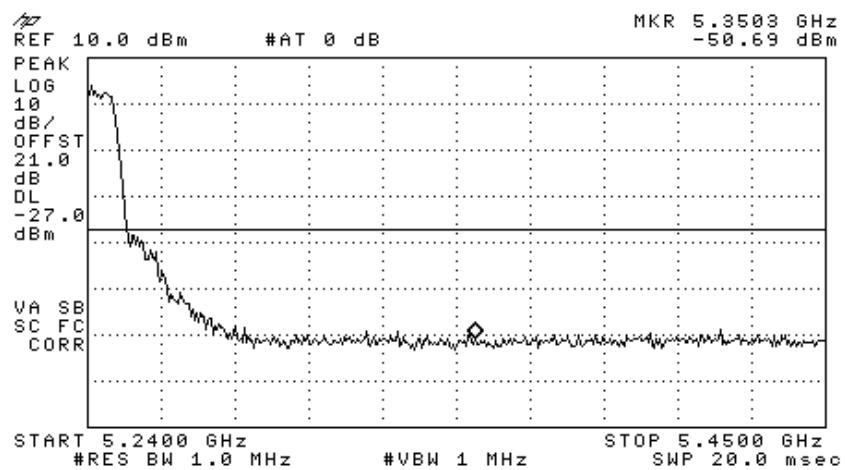


Figure 338 —5240 MHz 64QAM

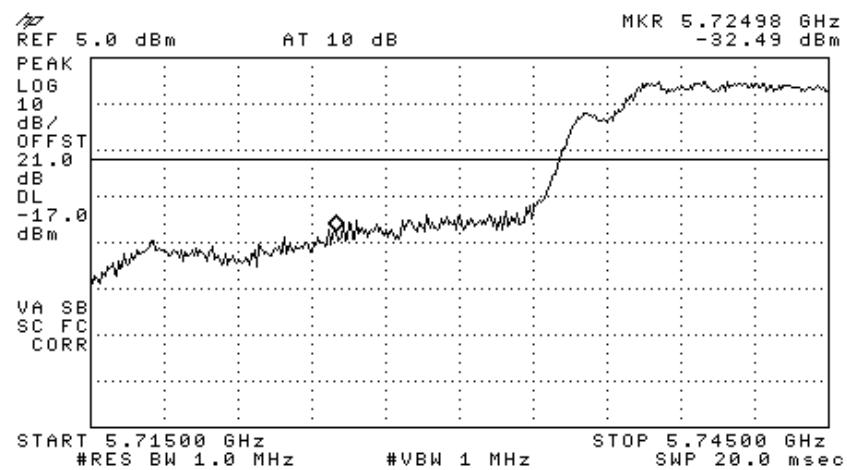


Figure 339 —5745 MHz 64QAM

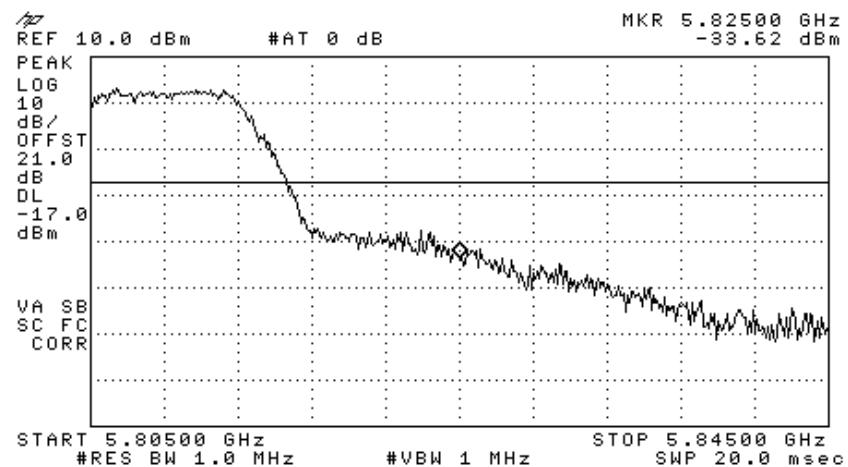


Figure 340 —5805 MHz 64QAM

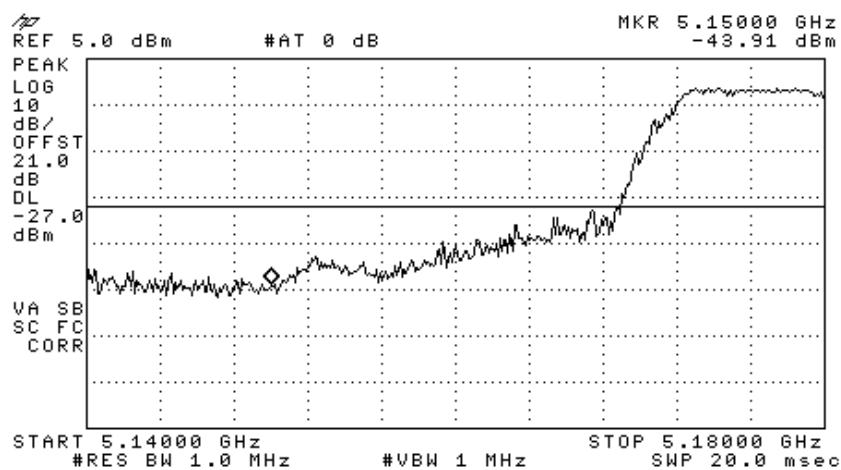


Figure 341 —5180 MHz BPSK

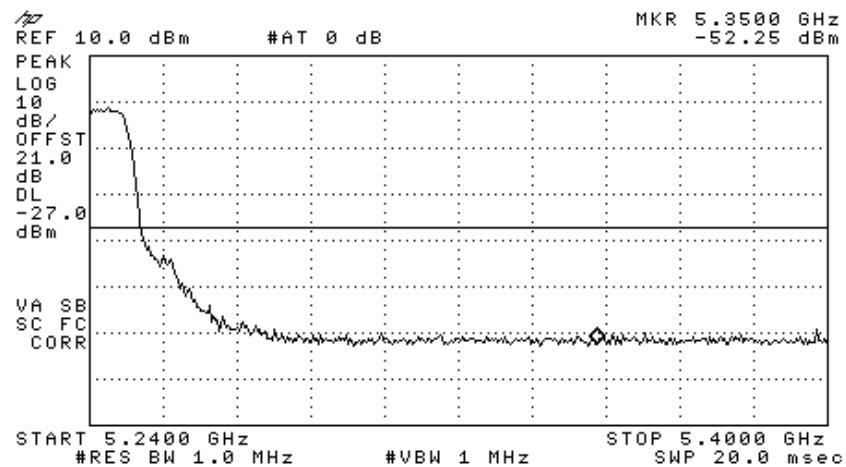


Figure 342 —5240 MHz BPSK

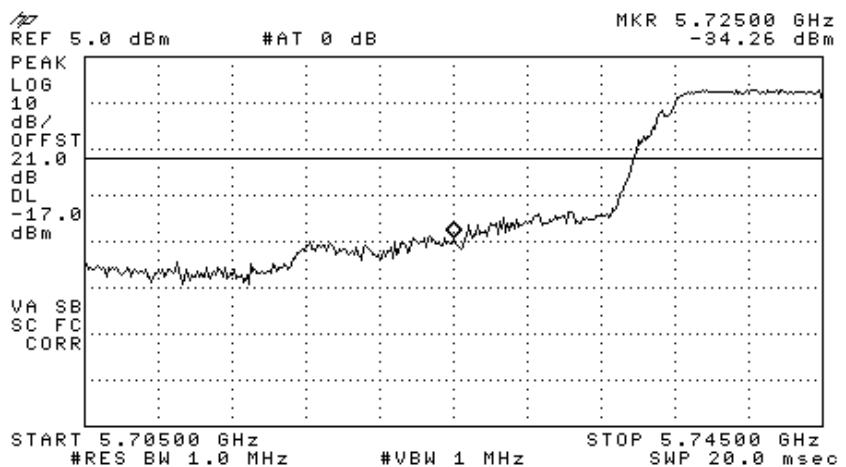


Figure 343 —5745 MHz BPSK

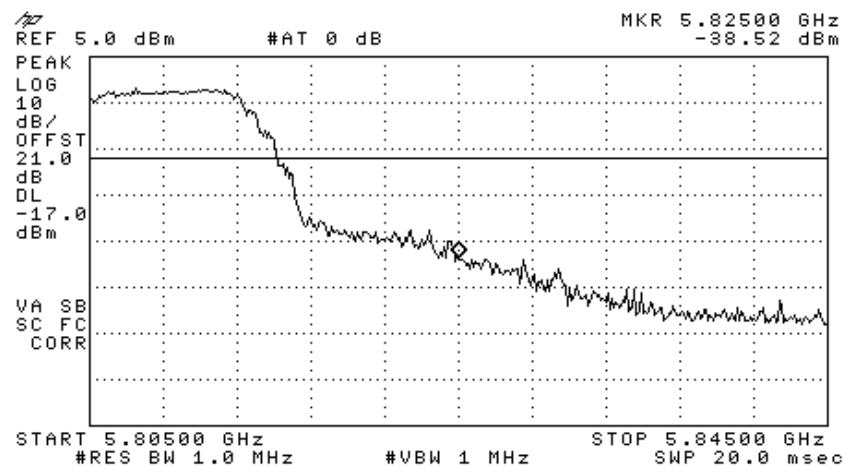


Figure 344 —5805 MHz BPSK

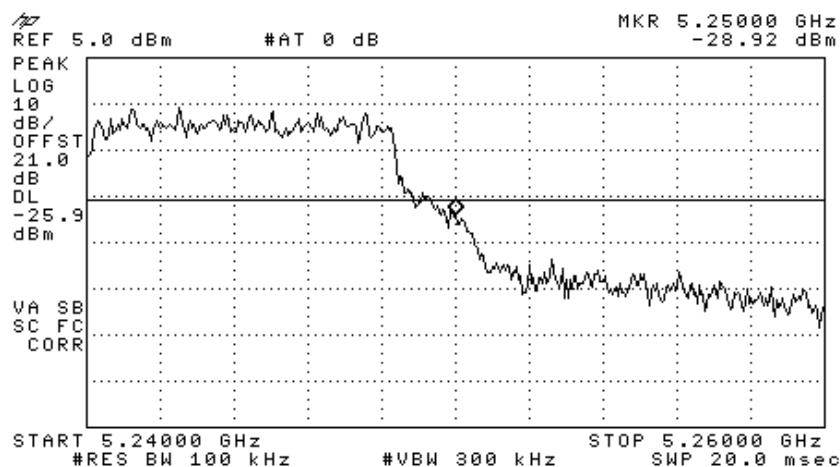


Figure 345 —Band Edge at 5.25 GHz Operation at 5.24 GHz 64QAM (Section 15.215(c))

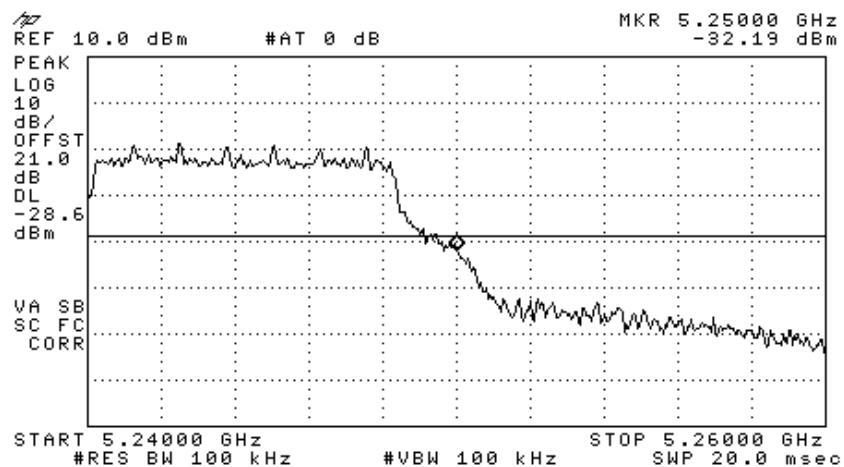


Figure 346 —Band Edge at 5.25 GHz Operation at 5.24 GHz BPSK (Section 15.215(c))

22.2 Results table

E.U.T. Description: WLAN Module With WCE (WiFi Coverage Extender) for DAS
With 4 Meru AP200 Access Points

Model No.: 860M With WCE

Serial Number: 1. 860M: 73903D 2. WCE: 739038

Specification: F.C.C. Part 15, Subpart C (15.215(c))

Operation Frequency (MHz)	Modulation	Band Edge Frequency (MHz)	Result (dBc)	Specification (dBc)	Margin (dB)
5240	64QAM	5250	23.0	20.0	-3.0
	BPSK	5250	23.6	20.0	-3.6

Figure 347 Band Edge at 5.25 GHz operation at 5.24 GHz

JUDGEMENT: Passed by 3.0 dB

TEST PERSONNEL:

Tester Signature:  Date: 28.02.08

Typed/Printed Name: E. Pitt

22.3 Results table

E.U.T. Description: WLAN Module With WCE (WiFi Coverage Extender) for DAS
With 4 Meru AP200 Access Points

Model No.: 860M With WCE

Serial Number: 1. 860M: 73903D 2. WCE: 739038

Specification: F.C.C. Part 15, Subpart C (15.407)

Operation Frequency (MHz)	Modulation	Band Edge Frequency (MHz)	Result (dBm)	Specification (dBm)	Margin (dB)
5180	64QAM	5150	-42.44	-27.0	-15.44
	BPSK	5150	-43.91	-27.0	-16.91
5240	64QAM	5350	-50.69	-27.0	-23.69
	BPSK	5350	-52.25	-27.0	-25.25
5725	64QAM	5725	-32.49	-17.0	-15.49
	BPSK	5725	-34.26	-17.0	-17.26
5825	64QAM	5825	-33.62	-17.0	-16.62
	BPSK	5825	-38.52	-17.0	-21.52

Figure 348 Band Edge Spectrum

JUDGEMENT: Passed by 15.44 dB

TEST PERSONNEL:

Tester Signature: Pitt Date: 28.02.08

Typed/Printed Name: E. Pitt

22.4 **Test Equipment Used.**

Band edge Spectrum

Instrument	Manufacturer	Model	Serial/Part Number	Calibration	
				Last Calibr.	Period
Spectrum Analyzer	HP	8592L	3826A01204	February 22, 2007	1 year
Attenuator	Jyebao	-	FAT-AM5AF5G6G2W20	May 9, 2007	1 year
Cable	Rhophase	KPS-5000-KPS	A1674	February 8, 2008	1 year

Figure 349 Test Equipment Used



23. Antenna Gain 5GHz Transmitter 802.11b/g+802.11a + CELL + PCS Signals

The antenna gain is 7 dBi.

24. R.F Exposure/Safety 5GHz Transmitter 802.11b/g+802.11a + CELL + PCS Signals

Typical use of the E.U.T. is repeating WiFi signals for DAS. The typical placement of the E.U.T. is on a wall near the ceiling. The typical distance between the E.U.T. and the user in the worst case application, is >1 m.

Calculation of Maximum Permissible Exposure (MPE)

Based on Section 1.1307(b)(1) Requirements

(f) FCC limits at 5745 MHz is: $1 \frac{mW}{cm^2}$

Using table 1 of Section 1.1310 limit for general population/uncontrolled exposures, the above level is an average over 30 minutes.

(g) The power density produced by the E.U.T. is

$$S = \frac{P_t G_t}{4\pi R^2}$$

P_t- Transmitted Power (Peak) 21.3 mW= 13.28 dBm

G_T- Antenna Gain, 7 dBi = 5

R- Distance from Transmitter using 1 m worst case

(h) The peak power density is :

$$S_p = \frac{21.3 \times 5}{4\pi(100)^2} = 0.85 \times 10^{-3} \frac{mW}{cm^2}$$

(i) The duty cycle of transmission in actual worst case is 50%.

The average power source is:

10.65mW

(j) The averaged power density of the E.U.T. is:

$$S_{AV} = 0.425 \times 10^{-3} \frac{mW}{cm^2}$$

(f) This is 3 orders of magnitude below the FCC limit.

25. Radiated Emission Per FCC Part 15 Sub-Part B Test Data 802.11b/g+802.11a + CELL + PCS Signals

25.1 ***Test Specification***

30-40000 MHz, FCC Part 15, Subpart B, CLASS B

25.2 ***Test Procedure***

The E.U.T. operation mode and test set-up are as described in Section 4.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The effect of varying the position of the cables was investigated to find the configuration that produces maximum emission.

The frequency range 30-40000 MHz was scanned, and the list of the highest emissions was verified and updated accordingly.

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 2.9 - 40 GHz, a spectrum analyzer including a low noise amplifier was used. The test distance was 3 meters. During peak measurements, the I.F. bandwidth was 1 MHz, and video bandwidth 3 MHz. During average measurements, the I.F. bandwidth was 1 MHz and video bandwidth was 100 Hz.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization. Verification of the E.U.T emissions was based on the following methods: turning the E.U.T on and off; using a frequency span less than 10 MHz; observation of the signal level during turntable rotation. (Background noise is not affected by the rotation of the E.U.T.)

The emissions were measured at a distance of 3 meters.

The E.U.T. was tested in both Rx and Tx modes.

The E.U.T. was tested at the operating frequencies of, 5180, 5200, 5240, 5745, 5765, and 5805 MHz using the following modulations: 64QAM, and BPSK.

25.3 **Test Data**

JUDGEMENT: Passed by 0.3 dB.


The margin between the emission level and the specification limit is 0.3 dB in the worst case at the frequency of 396.03 MHz, horizontal polarization.

The signals in the band 1.0 – 40.0 GHz were more than 20 dB below the specification limit.

The EUT met the requirements of the F.C.C. Part 15, Subpart B, Class B, specification.

The results for all three operating frequencies and modulations were the same.

TEST PERSONNEL:

Tester Signature:  Date: 02.03.08

Typed/Printed Name: A. Sharabi

Radiated Emission

E.U.T Description WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points
 Type 860M With WCE
 Serial Number: 1. 860M: 73903D
 2. WCE: 739038

Specification: FCC Part 15, Subpart B, Class B

Antenna Polarization: Horizontal
 Antenna: 3 meters distance

Frequency range: 30 MHz to 1000 MHz
 Detectors: Peak, Quasi-peak

Signal Number	Frequency (MHz)	Peak dBuV/m	QP dBuV/m	QP Delta L 1 (dB)	Avg dBuV/m	Av Delta L 2 (dB)	Corr (dB)
1	66.248650	26.1	23.2	-16.8			-2.5
2	250.004650	44.8	41.8	-4.2			20.3
3	264.010850	43.5	39.8	-6.2			21.0
4	264.017200	43.7	40.3	-5.7			21.0
5	396.012500	48.1	45.7	-0.3			18.9
6	499.896550	54.5	27.6	-18.4			20.4

Figure 350. Radiated Emission. Antenna Polarization: HORIZONTAL. Detectors: Peak, Quasi-peak

Note: QP Delta refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.


Radiated Emission

E.U.T Description	WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points
Type	860M With WCE
Serial Number:	1. 860M: 73903D 2. WCE: 739038

Specification: FCC Part 15, Subpart B, Class B

Antenna Polarization: Horizontal
Antenna: 3 meters distance

Frequency range: 30 MHz to 1000 MHz
Detectors: Peak, Quasi-peak

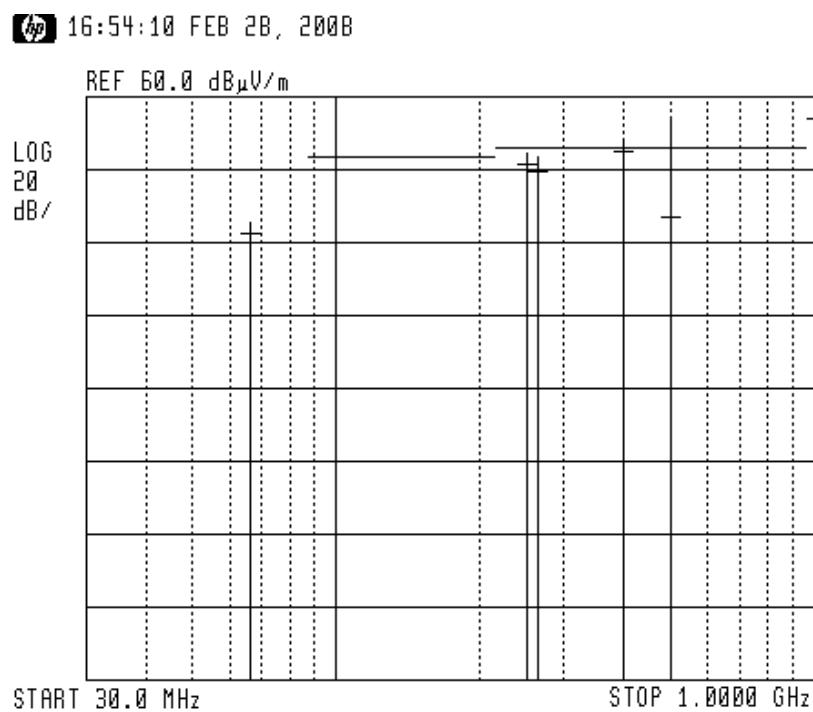

**Figure 351. Radiated Emission. Antenna Polarization: HORIZONTAL
Detectors: Peak, Quasi-peak**

Note:

1. Horizontal axis shows logarithmic frequency scale.
2. The vertical axis shows amplitude (in dB μ V/m).
3. Peak detection is designated by the top of each vertical line.
4. Quasi-peak detection is designated by the first dash mark (from the top) of each vertical line.

Radiated Emission

E.U.T Description WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points
 Type 860M With WCE
 Serial Number: 1. 860M: 73903D
 2. WCE: 739038

Specification: FCC Part 15, Subpart B, Class B

Antenna Polarization: Vertical
 Antenna: 3 meters distance

Frequency range: 30 MHz to 1000 MHz
 Detectors: Peak, Quasi-peak

Signal Number	Frequency (MHz)	Peak dBuV/m	QP dBuV/m	QP Delta L 1 (dB)	Avg dBuV/m	Av Delta L 2 (dB)	Corr (dB)
1	132.000055	31.4	28.7	-14.8			6.1
2	232.600000	42.7	38.2	-7.8			18.8
3	264.000000	42.5	39.0	-6.9			21.0
4	396.019850	47.5	43.3	-2.7			18.9
5	498.360850	50.4	35.5	-10.5			20.4
6	500.012100	49.0	40.7	-5.3			20.4

Figure 352. Radiated Emission. Antenna Polarization: VERTICAL. Detectors: Peak, Quasi-peak

Note: QP Delta refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.


Radiated Emission

E.U.T Description	WLAN Module With WCE (WiFi Coverage Extender) for DAS With 4 Meru AP200 Access Points
Type	860M With WCE
Serial Number:	1. 860M: 73903D 2. WCE: 739038

Specification: FCC Part 15, Subpart B, Class B

Antenna Polarization: Vertical
Antenna: 3 meters distance

Frequency range: 30 MHz to 1000 MHz
Detectors: Peak, Quasi-peak

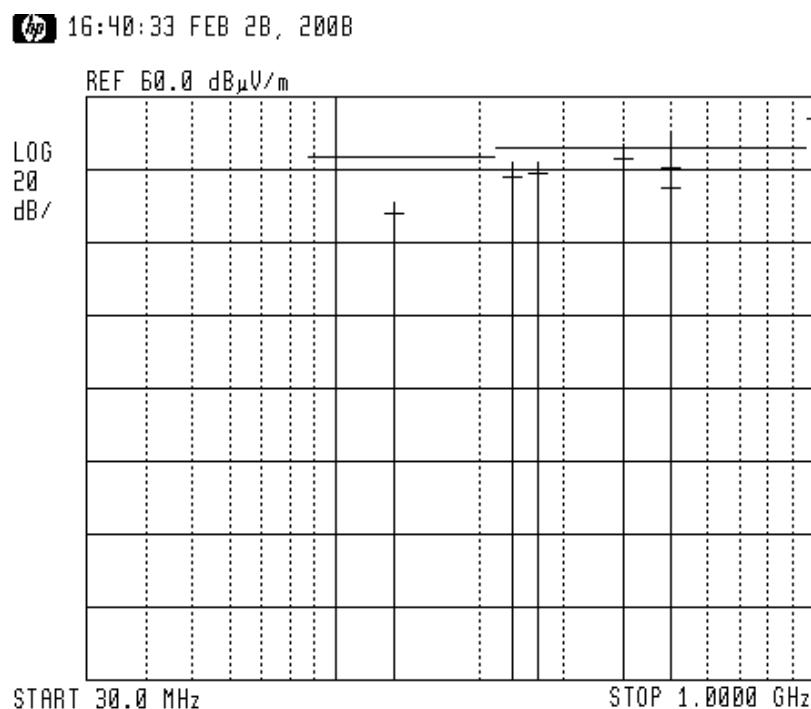

**Figure 353. Radiated Emission. Antenna Polarization: VERTICAL.
Detectors: Peak, Quasi-peak**

Note:

1. Horizontal axis shows logarithmic frequency scale.
2. The vertical axis shows amplitude (in dB μ V/m).
3. Peak detection is designated by the top of each vertical line.
4. Quasi-peak detection is designated by the first dash mark (from the top) of each vertical line.

25.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial No.	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	November 12, 2007	1 Year
RF Filter Section	HP	85420E	3705A00248	November 12, 2007	1 Year
Antenna Biconical	ARA	BCD 235/B	1041	March 22, 2007	1 Year
Antenna Log Periodic	ARA	LPD-2010/A	1038	November 22, 2007	1 Year
Antenna Log Periodic	A.H. Systems	SAS-200/511	253	February 4, 2007	2 Years
Double Ridged Waveguide Horn Antenna	EMCO	3115	29845	March 15, 2006	2 Years
Horn Antenna	ARA	SWH-28	1008	December 8, 2006	2 Years
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS-0411N313	013	November 2, 2007	1 Year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	January 9, 2007	1 Year
Low Noise Amplifier	MK Milliwave	MKT6-3000 4000-30-13P	399	January 9, 2007	1 Year
Spectrum Analyzer	HP	8593EM	3536A00120	February 26, 2008	1 Year
Spectrum Analyzer	HP	8564E	3442A00275	November 14, 2007	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKG19982	N/A	N/A



25.5 **Field Strength Calculation**

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$FS = RA + AF + CF$$

FS: Field Strength [dB μ v/m]

RA: Receiver Amplitude [dB μ v]

AF: Receiving Antenna Correction Factor [dB/m]

CF: Cable Attenuation Factor [dB]

No external pre-amplifiers are used.

26. Intermodulation Tests

26.1 *Test procedure*

An access point having maximum RF output power was used for this test.

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator (20 dB) and an appropriate coaxial cable (cable loss = 3.5 dB). The spectrum analyzer was set to 1 kHz resolution BW for the frequency range 9.0-150.0 kHz, 10kHz for the frequency range 10kHz-10.0MHz, 100kHz for the frequency range 10.0MHz-2.4385GHz, and 1MHz for the frequency range 2.4385-25.0GHz.

4 input signals were sent simultaneously to the E.U.T. as follows:

802.11b/g: in the frequency range 2400-2483 MHz, 2412MHz 64QAM

802.11a: in the frequency range 5150-5250 MHz, 5180MHz BPSK

CELL: in the frequency range 869-894 MHz, 890MHz FM dev. 100kHz

PCS: in the frequency range 1930-1990 MHz, 1985MHz CDMA

The frequency range of 9kHz – 40.0GHz was scanned for unwanted signals.

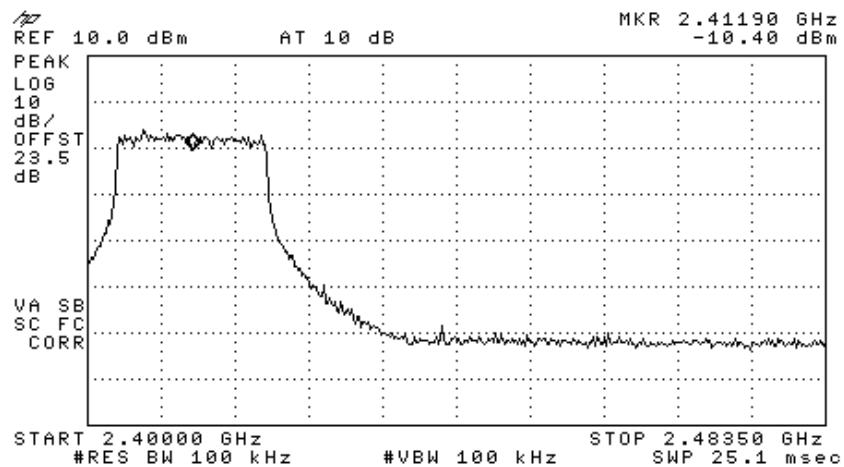


Figure 354 —2412MHz 64QAM

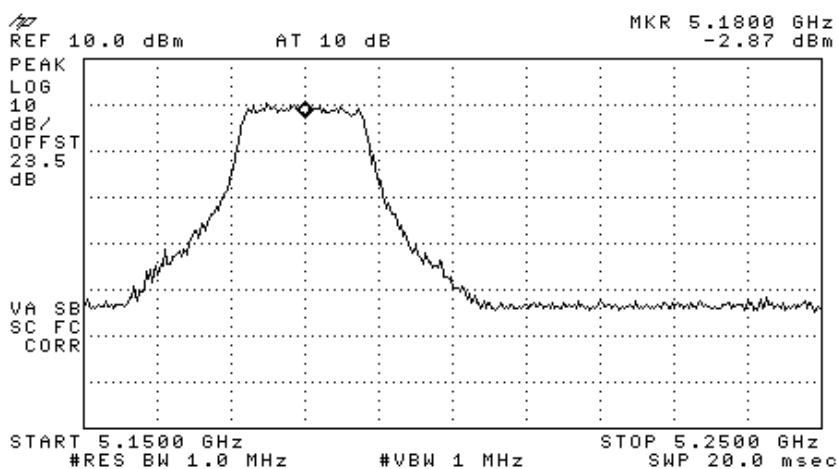


Figure 355 —5180MHz BPSK

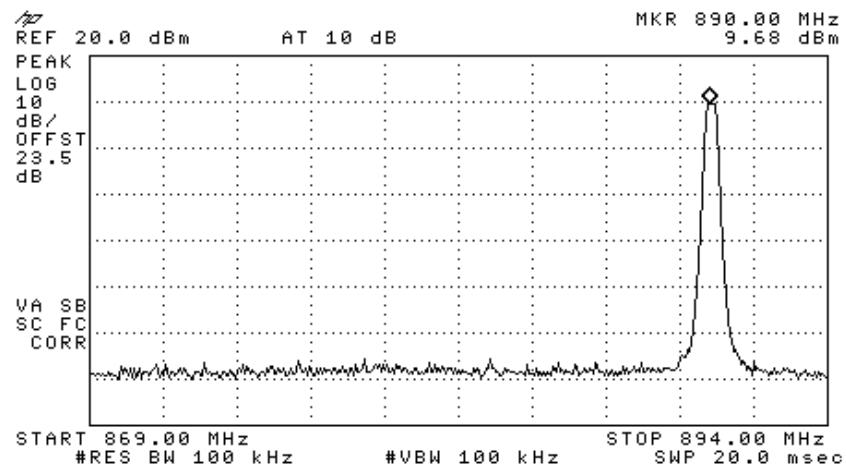


Figure 356 —890MHz FM

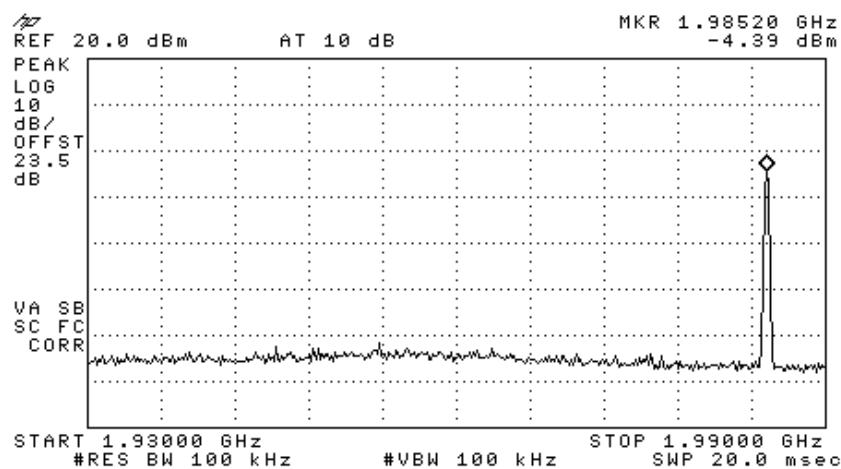


Figure 357 —1985MHz CDMA

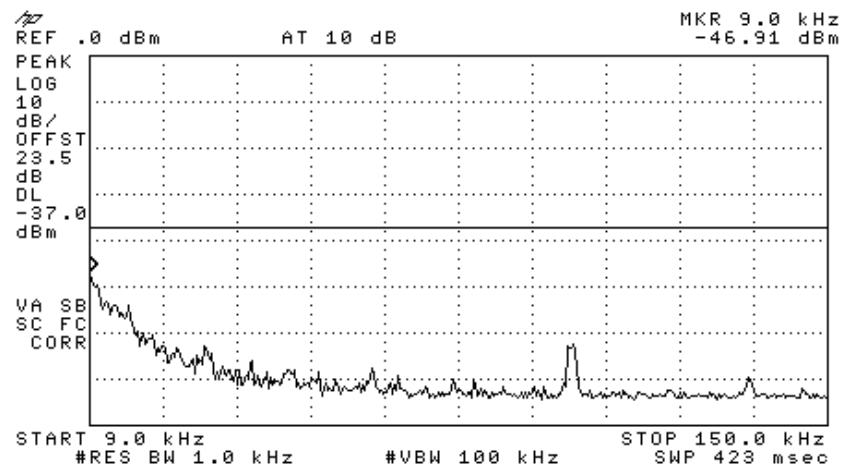


Figure 358

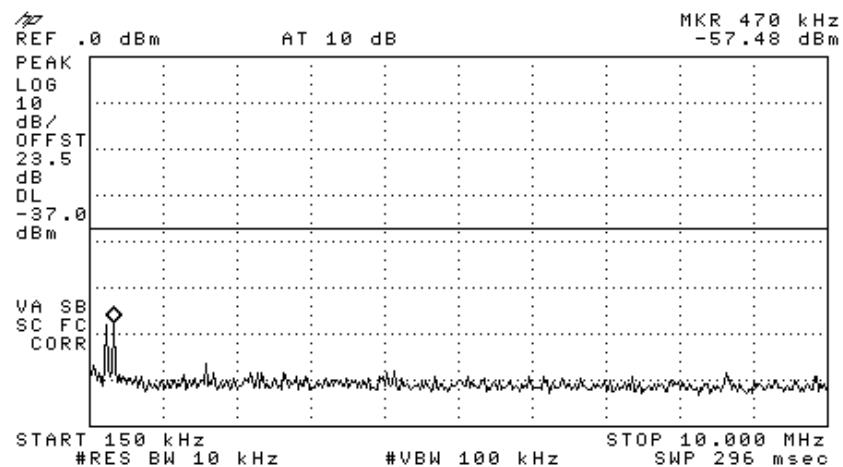


Figure 359

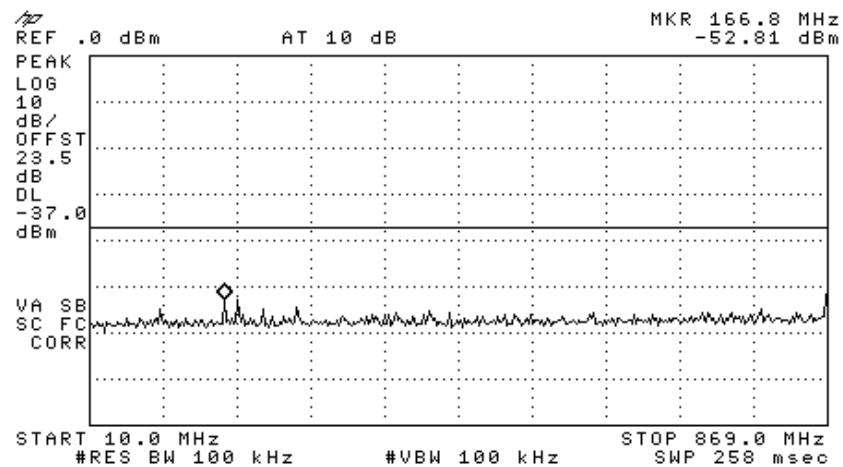


Figure 360

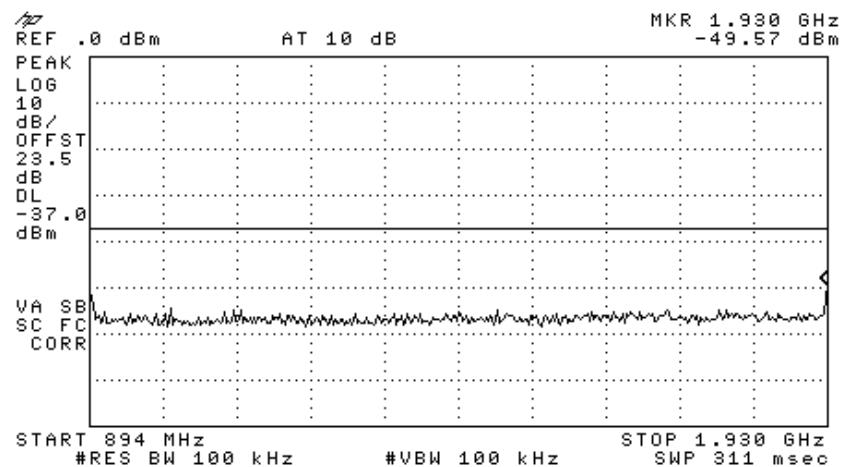


Figure 361

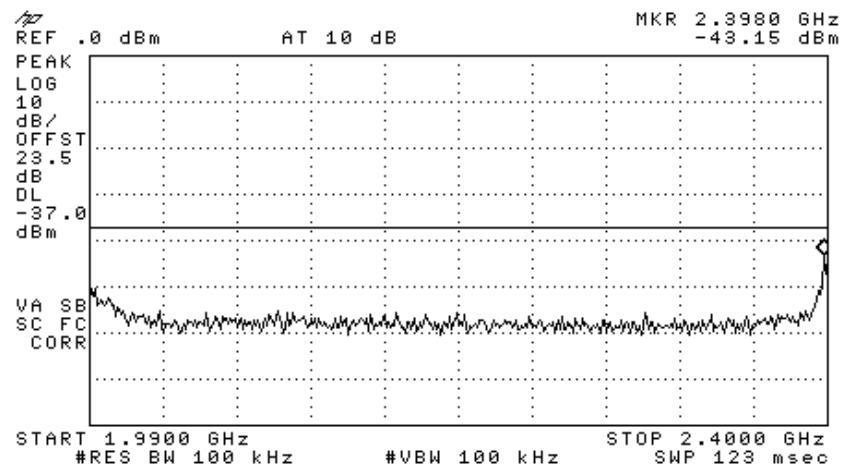


Figure 362

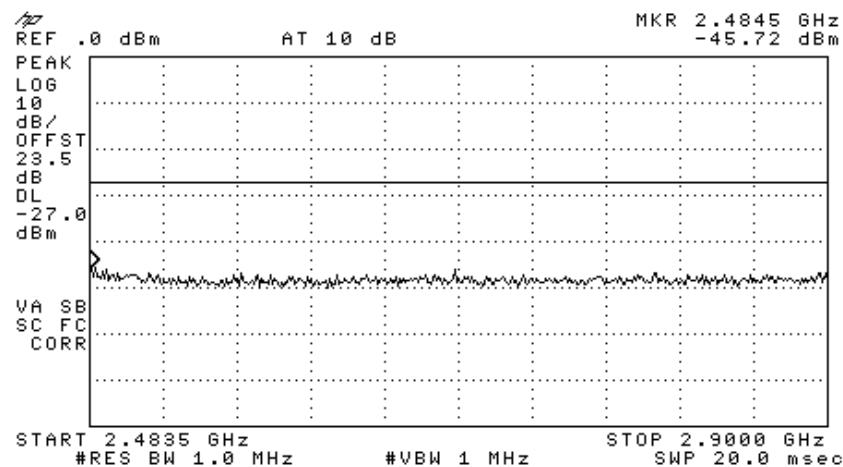


Figure 363

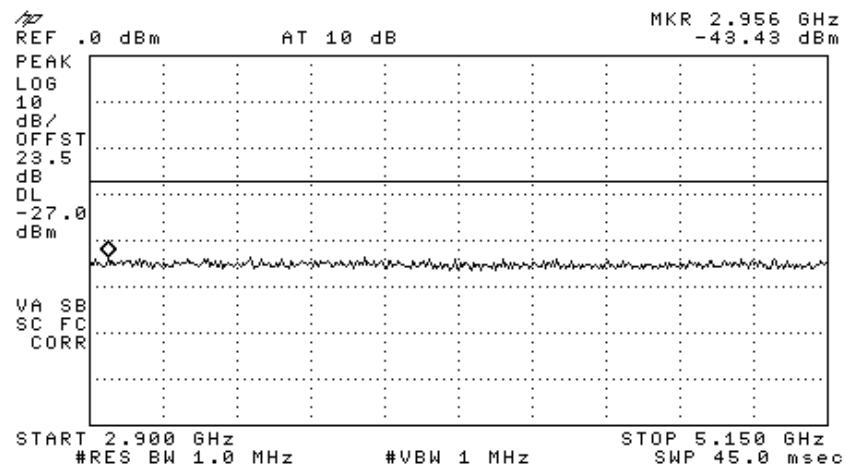


Figure 364

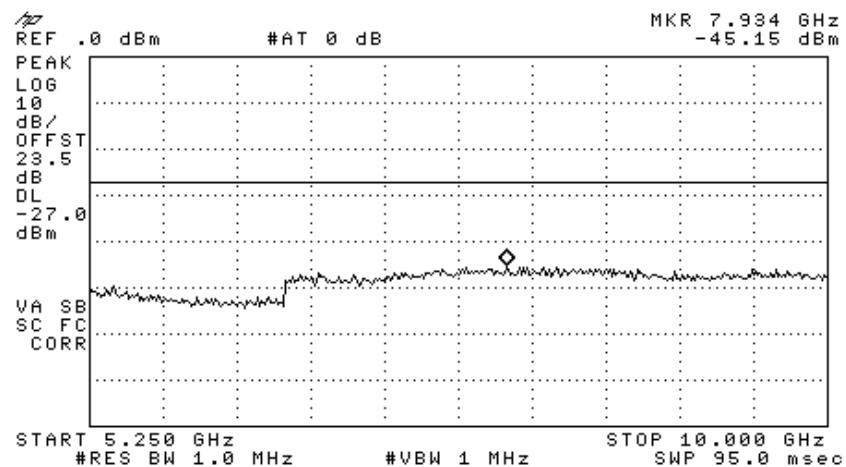


Figure 365

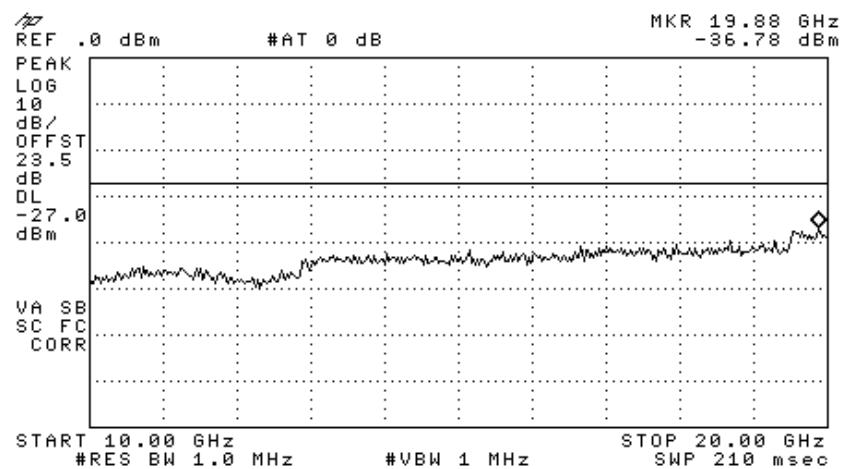


Figure 366

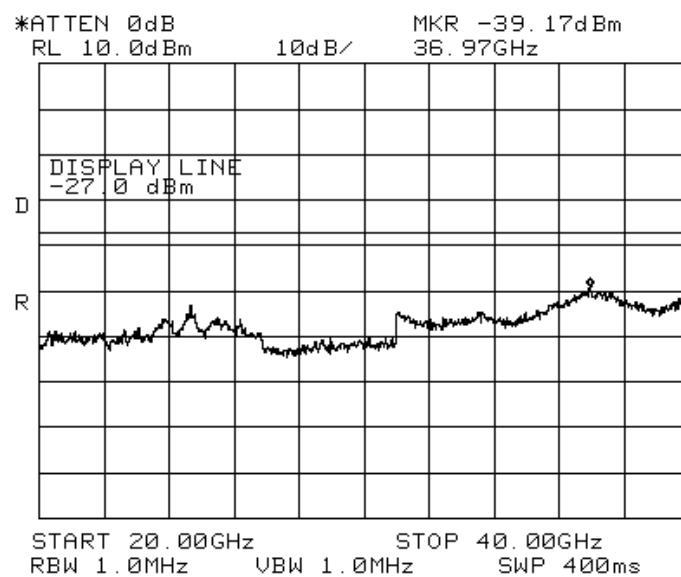


Figure 367

JUDGEMENT: Passed

TEST PERSONNEL:

Tester Signature: *E Pitt* Date: 28.02.08

Typed/Printed Name: E. Pitt

26.2 Test Equipment Used.

Intermodulation

Instrument	Manufacturer	Model	Serial/Part Number	Calibration	
				Last Calibr.	Period
Spectrum Analyzer	HP	8592L	3826A01204	February 22, 2007	1 year
Spectrum Analyzer	HP	8564E	3442A00275	November 26, 2006	1 year
Attenuator	Jyebao	-	FAT-AM5AF5G6G2W20	May 9, 2007	1 year
Cable	Rhophase	KPS-1501-1000	A1675	February 8, 2007	1 year

Figure 368 Test Equipment Used

27. APPENDIX A - CORRECTION FACTORS

27.1 *Correction factors for*

CABLE

**from EMI receiver
to test antenna
at 3 meter range.**

FREQUENCY (MHz)	CORRECTION FACTOR (dB)	FREQUENCY (MHz)	CORRECTION FACTOR (dB)
10.0	0.3	1200.0	7.3
20.0	0.6	1400.0	7.8
30.0	0.8	1600.0	8.4
40.0	0.9	1800.0	9.1
50.0	1.1	2000.0	9.9
60.0	1.2	2300.0	11.2
70.0	1.3	2600.0	12.2
80.0	1.4	2900.0	13.0
90.0	1.6		
100.0	1.7		
150.0	2.0		
200.0	2.3		
250.0	2.7		
300.0	3.1		
350.0	3.4		
400.0	3.7		
450.0	4.0		
500.0	4.3		
600.0	4.7		
700.0	5.3		
800.0	5.9		
900.0	6.3		
1000.0	6.7		

NOTES:

1. The cable type is RG-214.
2. The overall length of the cable is 27 meters.
3. The above data is located in file 27MO3MO.CBL on the disk marked "Radiated Emission Tests EMI Receiver".

27.2 Correction factors for

CABLE from EMI receiver to test antenna at 3 meter range.

FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.2
2.0	1.6
3.0	2.0
4.0	2.4
5.0	3.0
6.0	3.4
7.0	3.8
8.0	4.2
9.0	4.6
10.0	5.0
12.0	5.8

NOTES:

1. The cable type is RG-8.
2. The overall length of the cable is 10 meters.

27.3 Correction factors for

CABLE from spectrum analyzer to test antenna above 2.9 GHz

FREQUENCY (GHz)	CORRECTION FACTOR (dB)	FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.9	14.0	9.1
2.0	2.7	15.0	9.5
3.0	3.5	16.0	9.9
4.0	4.2	17.0	10.2
5.0	4.9	18.0	10.4
6.0	5.5	19.0	10.7
7.0	6.0	20.0	10.9
8.0	6.5	21.0	11.2
9.0	7.0	22.0	11.6
10.0	7.5	23.0	11.9
11.0	7.9	24.0	12.3
12.0	8.3	25.0	12.6
13.0	8.7	26.0	13.0

NOTES:

1. The cable type is SUCOFLEX 104 E manufactured by SUHNER.
2. The cable is used for measurements above 2.9 GHz.
3. The overall length of the cable is 10 meters.

27.4 Correction factors for

CABLE from EMI receiver to test antenna at 10 meter range.

FREQUENCY (MHz)	CORRECTION FACTOR (dB)	FREQUENCY (MHz)	CORRECTION FACTOR (dB)
10.0	0.3	1200.0	9.8
20.0	0.8	1400.0	10.0
30.0	0.9	1600.0	11.3
40.0	1.2	1800.0	12.2
50.0	1.4	2000.0	13.1
60.0	1.6	2300.0	14.5
70.0	1.8	2600.0	15.9
80.0	1.9	2900.0	16.4
90.0	2.0		
100.0	2.1		
150.0	2.6		
200.0	3.2		
250.0	3.8		
300.0	4.2		
350.0	4.6		
400.0	5.1		
450.0	5.3		
500.0	5.6		
600.0	6.3		
700.0	7.0		
800.0	7.6		
900.0	8.0		
1000.0	8.7		

NOTES:

1. The cable type is RG-214.
2. The overall length of the cable is 34 meters.
3. The above data is located in file 34M10MO.CBL on the disk marked "Radiated Emissions Tests EMI Receiver".

12.6 Correction factors for LOG PERIODIC ANTENNA
Type LPD 2010/A
at 3 and 10 meter ranges.

Distance of 3 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.1
250.0	10.2
300.0	12.5
400.0	15.4
500.0	16.1
600.0	19.2
700.0	19.4
800.0	19.9
900.0	21.2
1000.0	23.5

Distance of 10 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.0
250.0	10.1
300.0	11.8
400.0	15.3
500.0	15.6
600.0	18.7
700.0	19.1
800.0	20.2
900.0	21.1
1000.0	23.2

NOTES:

1. Antenna serial number is 1038.
2. The above lists are located in file number 38M30.ANT for a 3 meter range, and file number 38M100.ANT for a 10 meter range.
3. The files mentioned above are located on the disk marked "Radiated Emission Test EMI Receiver".

27.5 Correction factors for

LOG PERIODIC ANTENNA

Type SAS-200/511
at 3 meter range.

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
1.0	24.9
1.5	27.8
2.0	29.9
2.5	31.2
3.0	32.8
3.5	33.6
4.0	34.3
4.5	35.2
5.0	36.2
5.5	36.7
6.0	37.2
6.5	38.1

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
7.0	38.6
7.5	39.2
8.0	39.9
8.5	40.4
9.0	40.8
9.5	41.1
10.0	41.7
10.5	42.4
11.0	42.5
11.5	43.1
12.0	43.4
12.5	44.4
13.0	44.6

NOTES:

1. Antenna serial number is 253.
2. The above lists are located in file number SAS3M0.ANT for a 3 meter range.
3. The files mentioned above are located on the disk marked "Antenna Factors".

27.6 Correction factors for
**BICONICAL ANTENNA
Type BCD-235/B,
at 3 meter range**

FREQUENCY (MHz)	AFE (dB/m)
20.0	19.4
30.0	14.8
40.0	11.9
50.0	10.2
60.0	9.1
70.0	8.5
80.0	8.9
90.0	9.6
100.0	10.3
110.0	11.0
120.0	11.5
130.0	11.7
140.0	12.1
150.0	12.6
160.0	12.8
170.0	13.0
180.0	13.5
190.0	14.0
200.0	14.8
210.0	15.3
220.0	15.8
230.0	16.2
240.0	16.6
250.0	17.6
260.0	18.2
270.0	18.4
280.0	18.7
290.0	19.2
300.0	19.9
310	20.7
320	21.9
330	23.4
340	25.1
350	27.0

NOTES:

1. Antenna serial number is 1041.
2. The above list is located in file 19BC10M1.ANT on the disk marked "Radiated Emissions Tests EMI Receiver".

27.7 *Correction factors for* *BICONICAL ANTENNA*
Type BCD-235/B,
10 meter range

FREQUENCY (MHz)	AFE (dB/m)
30.0	12.1
40.0	10.6
50.0	10.6
60.0	8.9
70.0	8.5
80.0	9.6
90.0	9.4
100.0	9.6
110.0	10.3
120.0	10.7
130.0	12.6
140.0	12.7
150.0	12.7
160.0	13.8
170.0	13.7
180.0	14.9
190.0	13.4
200.0	13.1
210.0	14.0
220.0	14.5
230.0	15.8
240.0	16.0
250.0	16.6
260.0	16.7
270.0	18.3
280.0	18.5
290.0	19.3
300.0	20.9

NOTES:

1. Antenna serial number is 1041.
2. The above list is located in file 41BC10M1.ANT on the disk marked "Radiated Emissions Tests EMI Receiver".



27.8 Correction factors for Double-Ridged Waveguide Horn

**Model: 3115, S/N 29845
at 3 meter range.**

FREQUENCY (GHz)	ANTENNA FACTOR (dB 1/m)	ANTENN A Gain (dBi)	FREQUENCY (GHz)	ANTENNA FACTOR (dB 1/m)	ANTENNA Gain (dBi)
1.0	24.8	5.4	10.0	38.8	11.4
1.5	26.1	7.6	10.5	38.9	11.8
2.0	28.6	7.7	11.0	39.0	12.1
2.5	29.8	8.4	11.5	39.6	11.8
3.0	31.4	8.4	12.0	39.8	12.0
3.5	32.4	8.7	12.5	39.6	12.5
4.0	33.7	8.6	13.0	40.0	12.5
4.5	33.4	9.9	13.5	39.8	13.0
5.0	34.5	9.7	14.0	40.2	13.0
5.5	35.1	9.9	14.5	40.6	12.9
6.0	35.4	10.4	15.0	41.3	12.4
6.5	35.6	10.8	15.5	39.5	14.6
7.0	36.2	10.9	16.0	38.8	15.5
7.5	37.3	10.4	16.5	40.0	14.6
8.0	37.7	10.6	17.0	41.4	13.4
8.5	38.3	10.5	17.5	44.8	10.3
9.0	38.5	10.8	18.0	47.2	8.1
9.5	38.7	11.1			

27.9 Correction factors for

Horn Antenna

**Model: SWH-28
at 1 meter range.**

FREQUENCY (GHz)	AFE (dB /m)	Gain (dB1)
18.0	40.3	16.1
19.0	40.3	16.3
20.0	40.3	16.1
21.0	40.3	16.3
22.0	40.4	16.8
23.0	40.5	16.4
24.0	40.5	16.6
25.0	40.5	16.7
26.0	40.6	16.4

27.10 Correction factors for
**Horn Antenna
Model: V637**

FREQUENCY (GHz)	AFE (dB /m)	Gain (dB1)
26.0	43.6	14.9
27.0	43.7	15.1
28.0	43.8	15.3
29.0	43.9	15.5
30.0	43.9	15.8
31.0	44.0	16.0
32.0	44.1	16.2
33.0	44.1	16.4
34.0	44.1	16.7
35.0	44.2	16.9
36.0	44.2	17.1
37.0	44.2	17.4
38.0	44.2	17.6
39.0	44.2	17.8
40.0	44.2	18.0

27.11 Correction factors for ACTIVE LOOP ANTENNA

Model 6502

S/N 9506-2950

FREQUENCY (MHz)	Magnetic Antenna Factor (dB)	Electric Antenna Factor (dB)
.009	-35.1	16.4
.010	-35.7	15.8
.020	-38.5	13.0
.050	-39.6	11.9
.075	-39.8	11.8
.100	-40.0	11.6
.150	-40.0	11.5
.250	-40.0	11.6
.500	-40.0	11.5
.750	-40.1	11.5
1.000	-39.9	11.7
2.000	-39.5	12.0
3.000	-39.4	12.1
4.000	-39.7	11.9
5.000	-39.7	11.8
10.000	40.2	11.3
15.000	-40.7	10.8
20.000	-40.5	11.0
25.000	-41.3	10.2
30.000	42.3	9.2