

DATE: 2 December 2010

I.T.L. (PRODUCT TESTING) LTD.

FCC Radio Test Report

for

Mobile Access Networks

Equipment under test:

VE LTE 700 MHz MIMO Lower Band Comprising:

1. VE Control Unit 2. VE Access Pod

1. VCU-LTE700L-12E 2. VAP-LTE700LE-EXTAN

Written by:




D. Shidlowsky, Documentation

Approved by:



A. Sharabi, Test Engineer

Approved by:



I. Raz, EMC Laboratory Manager

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.

Measurement/Technical Report for

FCC ID: OJFVELTE700L

This report concerns:

Original Grant: X

Class II change:

Class I change:

Equipment type:

Licensed Non-Broadcast Station Transmitter

Limits used:

47CFR Part 27 Subpart C

Measurement procedure used is ANSI C63.4-2003.

Substitution Method used as in ANSI/TIA-603-D: 2010

Application for Certification
prepared by:

Ishaishou Raz

ITL (Product Testing) Ltd.

Kfar Bin Nun

D.N. Shimshon 99780

Israel

e-mail sraz@itl.co.il

Applicant for this device:
(different from "prepared by")

Steve Blum

Mobile Access Networks

8391 Old Courthouse Rd., Suite #300

Vienna, VA. 22182

U.S.A.

Tel: +1-541-758-2880

Fax: +1-703-848-0260

e-mail: sblum@mobileaccess.com

TABLE OF CONTENTS

1. GENERAL INFORMATION -----	4
1.1 Administrative Information.....	4
1.2 List of Accreditations	5
1.3 Product Description	6
1.4 Test Methodology.....	6
1.5 Test Facility	6
1.6 Measurement Uncertainty	7
2. SYSTEM TEST CONFIGURATION-----	8
2.1 Justification.....	8
2.2 EUT Exercise Software	8
2.3 Special Accessories	8
2.4 Equipment Modifications	8
2.5 Configuration of Tested System.....	8
3. CONDUCTED AND RADIATED MEASUREMENT TEST SET-UPS PHOTO-----	9
4. CONDUCTED EMISSION FROM AC POWER LINES -----	11
4.1 Test Specification	11
4.2 Test Procedure	11
4.3 Measured Data.....	11
4.4 Test Instrumentation Used, Conducted Measurement	16
5. MAXIMUM PEAK OUTPUT POWER -----	17
5.1 Test Specification	17
5.2 Test procedure	17
5.3 Results table.....	20
5.4 Test Equipment Used.....	21
6. EMISSION BANDWIDTH-----	22
6.1 Test Specification	22
6.2 Test Procedure	22
6.3 Results Table	29
6.4 Test Equipment Used.....	30
7. CONDUCTED SPURIOUS EMISSIONS -----	31
7.1 Test Specification	31
7.2 Test procedure	31
7.3 Results table.....	44
7.4 Test Equipment Used.....	45
8. BAND EDGE MEASUREMENTS -----	46
8.1 Test Specification	46
8.2 Test procedure	46
8.3 Results table.....	50
8.4 Test Equipment Used.....	51
9. SPURIOUS RADIATED EMISSION -----	52
9.1 Test Specification	52
9.2 Test Procedure	52
9.3 Test Results	55
9.4 Test Instrumentation Used, Radiated Measurements	55
10. FREQUENCY STABILITY -----	56
11. APPENDIX A - CORRECTION FACTORS -----	60
11.1 Correction factors for CABLE	60
11.2 Correction factors for CABLE	61
11.3 Correction factors for CABLE	62
11.4 Correction factors for LOG PERIODIC ANTENNA	63
11.5 Correction factors for Double-Ridged Waveguide Horn	64

1. General Information

1.1 ***Administrative Information***

Manufacturer: Mobile Access Networks

Manufacturer's Address: 8391 Old Courthouse Rd.
Suite #300
Vienna, VA 22182
U.S.A.
Tel: +1-541-758-2880
Fax: +1-703-848-0260

Manufacturer's Representative: Steve Blum

Equipment Under Test (E.U.T): VE LTE 700 MHz MIMO Lower Band Comprising:
1. VE Control Unit 2. VE Access Pod

Equipment Model No.: 1. VCU-LTE700L-12E 2. VAP-LTE700LE-EXTAN

Equipment Serial No.: 1. 00101200036 2. 00101600069

Date of Receipt of E.U.T: 13.10.10

Start of Test: 13.10.10

End of Test: 07.11.10

Test Laboratory Location: I.T.L (Product Testing) Ltd.
Kfar Bin Nun,
ISRAEL 99780

Test Specifications: FCC Part 27 Subpart C

1.2 List of Accreditations

The EMC laboratory of I.T.L. is accredited by the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), Registration No. 90715.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-1350, R-1285.
5. Industry Canada (Canada), IC File No.: 46405-4025; Site No. IC 4025B-1.
6. TUV Product Services, England, ASLLAS No. 97201.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.

1.3 **Product Description**

The MobileAccessVE LTE 700 MHz MIMO solution provides enhanced, cost effective, in-building LTE MIMO coverage for any small to large-sized enterprise environment. This solution is quickly and easily deployed using the existing Ethernet cabling infrastructure without affecting existing LAN services or performance.

The MobileAccessVE solution distributes LTE MIMO service to VE Access Pods (VAPs) installed throughout the enterprise and which distribute the services via external antennas, and provide Ethernet connectivity (and PoE pass-through) to LAN terminals. VE seamlessly coexists with the Enterprise LAN and does not consume LAN capacity.

The VAPs are distributed on each floor and plug into existing standard Ethernet jacks. They are powered via PoE technology and managed via a VE Control Unit (VCU) located in the floor's telco closet. For site coverage that requires more than one VCU, several VCUs can be aggregated under a single Master VCU. The Master VCU provides the interface to the carrier's capacity sources and management.

This enhanced LTE 700 MIMO coverage solution can be quickly and easily installed with minimal disturbance to the enterprise. In less than a few hours and with no additional cables being required, a scalable and flexible solution is provided at a significantly lower total installation cost.

In a single-tier installation the VCU is connected to both the service provider's equipment and the Ethernet switch, and distributes Ethernet and mobile services to up to 12 VAPs distributed over one or more adjacent floors.

Multi-tier installation includes the Master VCU that supports up to 12 Slave VCUs. In this type of installation the provider's services are fed to the Master VCU through which the Slave VCUs are controlled and managed.

1.4 **Test Methodology**

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4: 2003. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.5 **Test Facility**

The radiated emissions tests were performed at I.T.L.'s testing facility at Kfar Bin-Nun, Israel. This site is a FCC listed test laboratory (FCC Registration No. 90715, date of listing 03 September 2009).

I.T.L.'s EMC Laboratory is also accredited by A2LA, certificate No. 1152.01.

1.6 *Measurement Uncertainty*

Conducted Emission

The uncertainty for this test is 2 dB.

Radiated Emission

The Open Site complies with the ± 4 dB Normalized Site Attenuation requirements of ANSI C63.4-2003. In accordance with Paragraph 5.4.6.1 of this standard, this tolerance includes instrumentation calibration errors, measurement technique errors, and errors due to site anomalies.

2. System Test Configuration

2.1 **Justification**

The test setup was configured to closely resemble the standard installation.

The EUT consists of the VCU and the VAP.

The LTE source signal is represented in the setup by appropriate signal generator.

An “Exercise” SW on the computer was used to enable / disable transmission of the VAP, while the EUT output was connected to the spectrum analyzer.

Both MIMO channels transmit during the testing.

2.2 **EUT Exercise Software**

The Element Management System EngGUI ver. 2.6 build 01 used for commands delivery.

These commands are used to enable / disable of VAP transmission.

APod Embedded SW version 2.6 build 08

VCU Embedded SW version 2.6 build 51

2.3 **Special Accessories**

No special accessories were needed in order to achieve compliance.

2.4 **Equipment Modifications**

No modifications were necessary in order to achieve compliance.

2.5 **Configuration of Tested System**

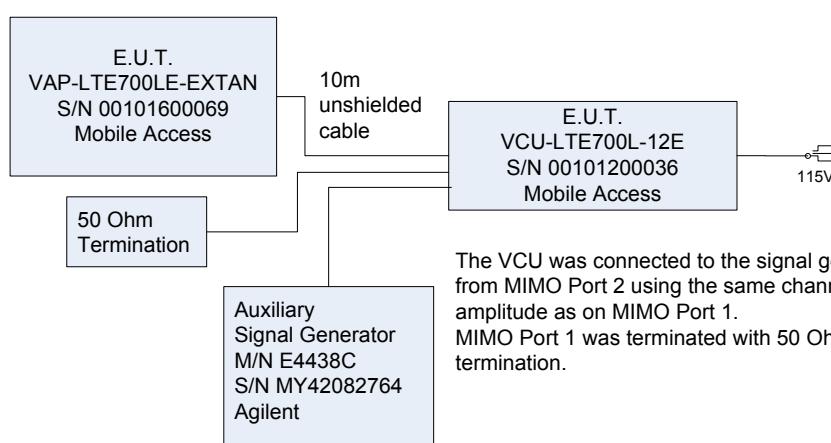


Figure 1. Test Set-up

3. Conducted and Radiated Measurement Test Set-ups Photo

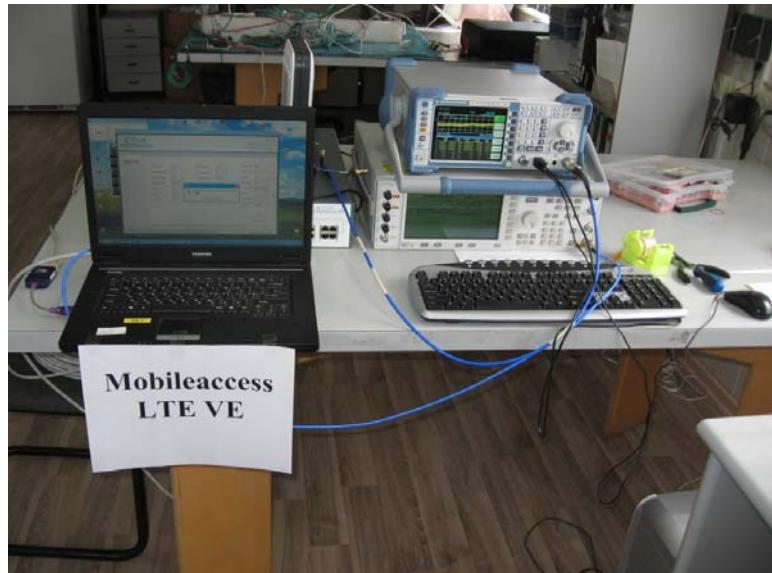


Figure 2. Conducted Emission From Antenna Ports Tests



Figure 3. Radiated Emission Test



Figure 4. Frequency Error Test

4. Conducted Emission From AC Power Lines

4.1 Test Specification

F.C.C., Part 15, Subpart C

4.2 Test Procedure

The E.U.T operation mode and test set-up are as described in Section 3.1. In order to minimize background noise interference, the conducted emission testing was performed inside a shielded room, with the E.U.T placed on an 0.8 meter high wooden table, 0.4 meter from the room's vertical wall.

The E.U.T was powered from 115 V AC / 60 Hz via a 50 Ohm / 50 μ Hn Line Impedance Stabilization Network (LISN) on the phase and neutral lines. The LISN's were grounded to the shielded room ground plane (floor), and were kept at least 0.8 meters from the nearest boundary of the E.U.T

The center of the E.U.T AC cable was folded back and forth, in order to form a bundle less than 0.40 meters and a total cable length of 1 meter.

The emission voltages at the LISN's outputs were measured using a computerized receiver, complying with CISPR 16 requirements. The specification limits are loaded to the receiver via a 3.5" floppy disk and are displayed on the receiver's spectrum display.

A frequency scan between 0.15 and 30 MHz was performed at 9 kHz I.F. band width, and using peak detection.

The spectral components having the highest level on each line were measured using a quasi-peak and average detector.

4.3 Measured Data

JUDGEMENT: Passed by 4.0 dB

The margin between the emission levels and the specification limit is, in the worst case, 14.5 dB for the phase line at 0.20 MHz and 4.0 dB at 15.49 MHz for the neutral line.

The EUT met the F.C.C. Part 15, Subpart C specification requirements.

The details of the highest emissions are given in *Figure 5* to *Figure 8*.

TEST PERSONNEL:

Tester Signature:  Date: 02.12.10

Typed/Printed Name: A. Sharabi

Conducted Emission

E.U.T Description VE LTE 700 MHz MIMO Lower Band Comprising:
 1. VE Control Unit 2. VE Access Pod

Type 1. VCU-LTE700L-12E 2. VAP-LTE700LE-EXTAN

Serial Number: 1. 00101200036 2. 00101600069

Specification: F.C.C., Part 15, Subpart C

Lead: Phase

Detectors: Peak, Quasi-peak, Average

Signal Number	Frequency (MHz)	Peak (dBuV)	QP (dBuV)	QP Delta L 1 (dB)	Avg (dBuV)	Av Delta L 2 (dB)	Corr (dB)
1	0.200975	50.8	48.6	-15.0	39.1	-14.5	0.0
2	0.300988	31.6	29.3	-31.0	20.3	-30.0	0.0
3	4.945385	27.8	23.9	-32.1	10.8	-35.2	0.0
4	10.001020	35.7	39.3	-20.7	34.3	-15.7	0.0
5	15.380320	38.5	38.4	-21.6	29.4	-20.6	0.0
6	20.259159	28.5	26.6	-33.4	23.2	-26.8	0.0

Figure 5. Detectors: Peak, Quasi-peak, AVERAGE .

Note: *QP Delta/Av Delta refer to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.*

Conducted Emission

E.U.T Description

VE LTE 700 MHz MIMO Lower Band Comprising:

1. VE Control Unit 2. VE Access Pod

Type

1. VCU-LTE700L-12E 2. VAP-LTE700LE-EXTAN

Serial Number:

1. 00101200036 2. 00101600069

Specification: F.C.C., Part 15, Subpart C

Lead: Phase

Detectors: Peak, Quasi-peak, Average



ACTV DET: PEAK
MEAS DET: PEAK QP AVG
MKR 200 kHz
49.86 dB μ V

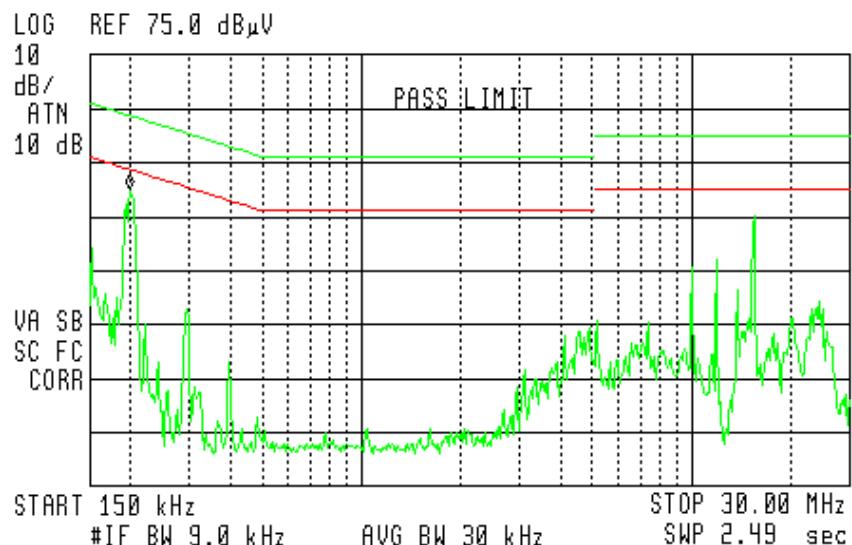


Figure 6. Detectors: Peak, Quasi-peak, Average

Conducted Emission

E.U.T Description VE LTE 700 MHz MIMO Lower Band Comprising:
 1. VE Control Unit 2. VE Access Pod

Type 1. VCU-LTE700L-12E 2. VAP-LTE700LE-EXTAN

Serial Number: 1. 00101200036 2. 00101600069

Specification: F.C.C., Part 15, Subpart C

Lead: Neutral

Detectors: Peak, Quasi-peak, Average

Signal Number	Frequency (MHz)	Peak (dBuV)	QP (dBuV)	QP Delta L 1 (dB)	Avg (dBuV)	Av Delta L 2 (dB)	Corr (dB)
1	0.200123	50.4	48.5	-15.2	38.8	-14.9	0.0
2	0.301208	31.3	29.4	-30.8	20.2	-30.0	0.0
3	5.903470	28.1	22.3	-37.7	17.0	-33.0	0.0
4	10.001164	36.2	39.5	-20.5	35.2	-14.8	0.0
5	11.935639	25.8	18.8	-41.2	19.5	-30.5	0.0
6	15.489729	48.3	47.2	-12.8	46.0	-4.0	0.0

Figure 7. Detectors: Peak, Quasi-peak, AVERAGE

Note: QP Delta/Av Delta refer to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Conducted Emission

E.U.T Description VE LTE 700 MHz MIMO Lower Band Comprising:
 1. VE Control Unit 2. VE Access Pod

Type 1. VCU-LTE700L-12E 2. VAP-LTE700LE-EXTAN

Serial Number: 1. 00101200036 2. 00101600069

Specification: F.C.C., Part 15, Subpart C

Lead: Neutral

Detectors: Peak, Quasi-peak, Average



ACTV DET: PEAK
 MEAS DET: PEAK QP AVG
 MKR 15.45 MHz
 46.34 dB μ V

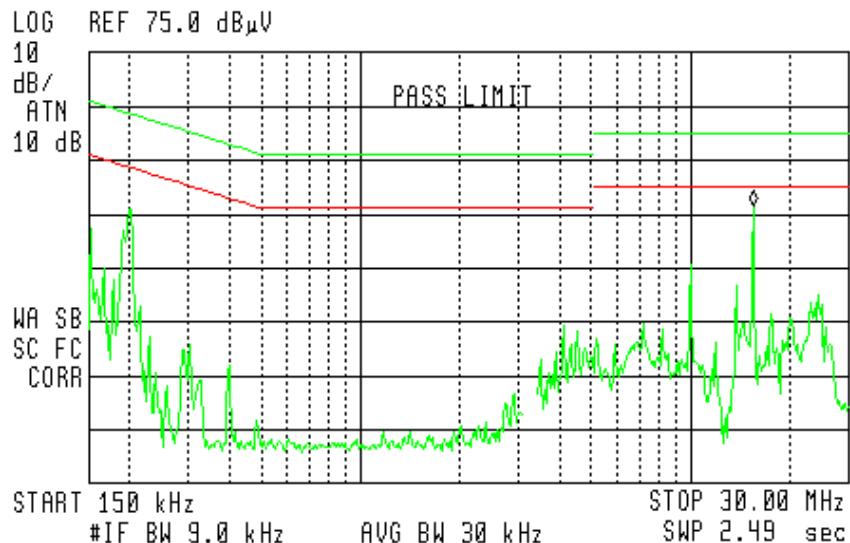


Figure 8 Conducted Emission: NEUTRAL
Detectors: Peak, Quasi-peak, Average

4.4 **Test Instrumentation Used, Conducted Measurement**

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
LISN	Fischer	FCC-LISN-2A	127	March 3, 2010	1 Year
LISN	Fischer	FCC-LISN-2A	128	March 3, 2010	1 Year
EMI Receiver	HP	85422E	3906A00276	November 10, 2009	1 Year
RF Filter Section	HP	85420E	3705A00248	November 10, 2009	1 Year
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

5. Maximum Peak Output Power

5.1 Test Specification

FCC Part 27, Subpart C (27.50(h)(2))

5.2 Test procedure

Peak Power Output must not exceed 1000 W. The E.U.T. antenna terminal was connected to the Spectrum Analyzer through an external attenuator and an appropriate coaxial cable (21 dB). The E.U.T. RF output was OFDMA, 64QAM 16QAM and QPSK at 10 MHz bandwidth in the 728-746 MHz bands. Special attention was taken to prevent Spectrum Analyzer RF input overload. The Spectrum Analyzer was set to 100 kHz RBW.

Signal generator output power was 1.4dBm.

Antenna type :Dipole antenna with N type connector (Antenna Gain : 7dBi)

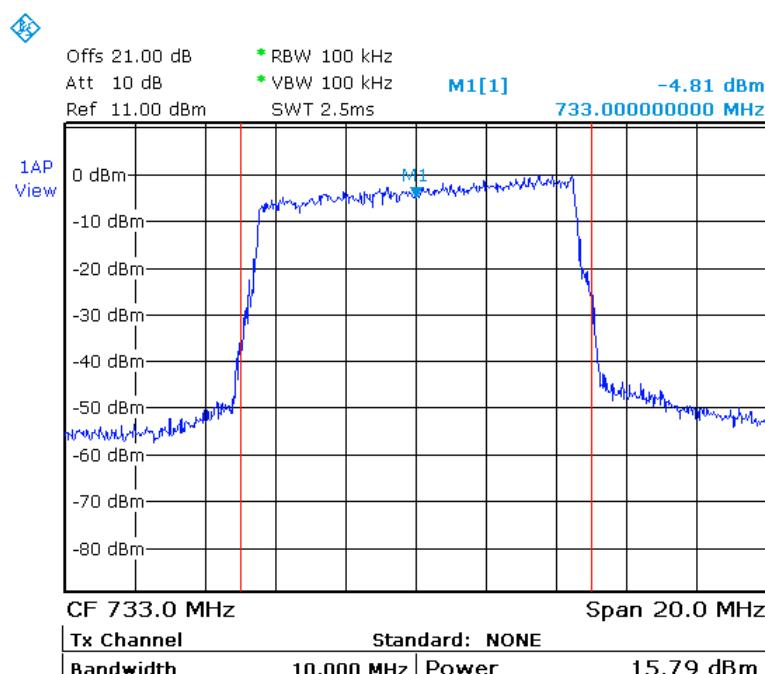


Figure 9.— 733.00 MHz QPSK

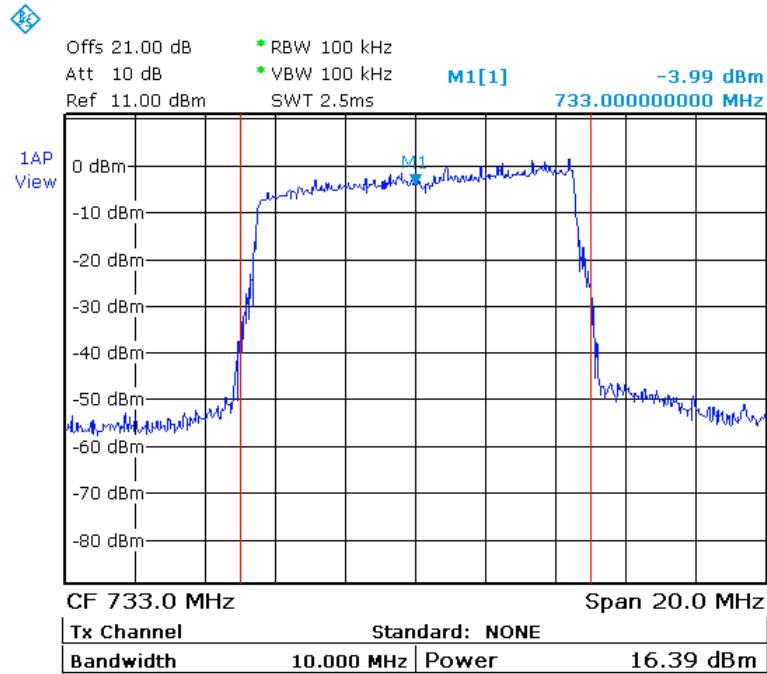


Figure 10.— 733.00 MHz 16QAM



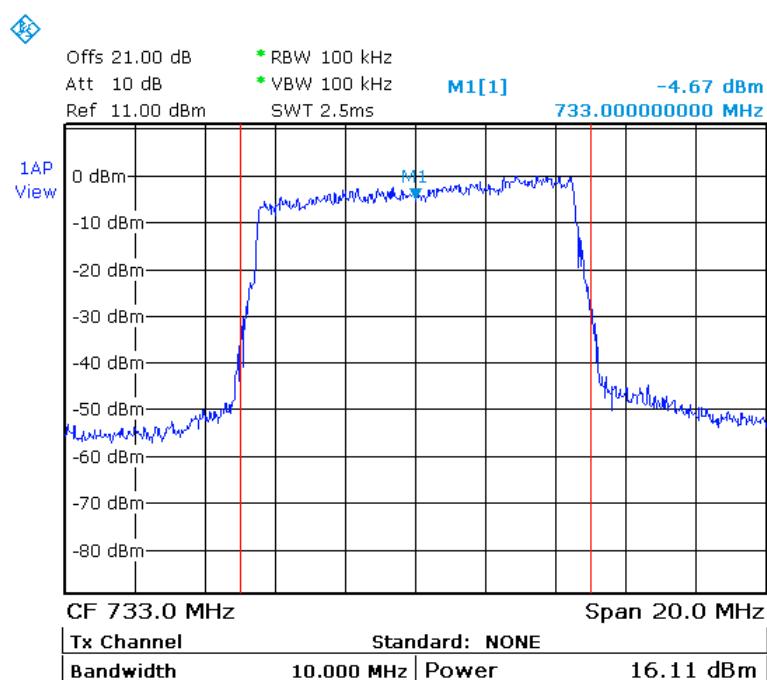


Figure 11.— 733.00 MHz 64QAM

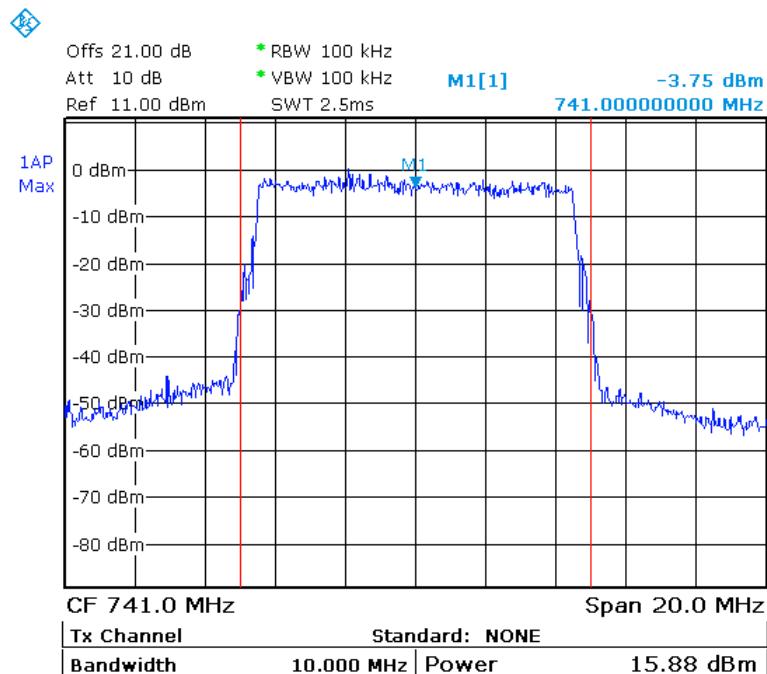

Date: 13.OCT.2010 14:32:44

Figure 12.— 741.00 MHz QPSK

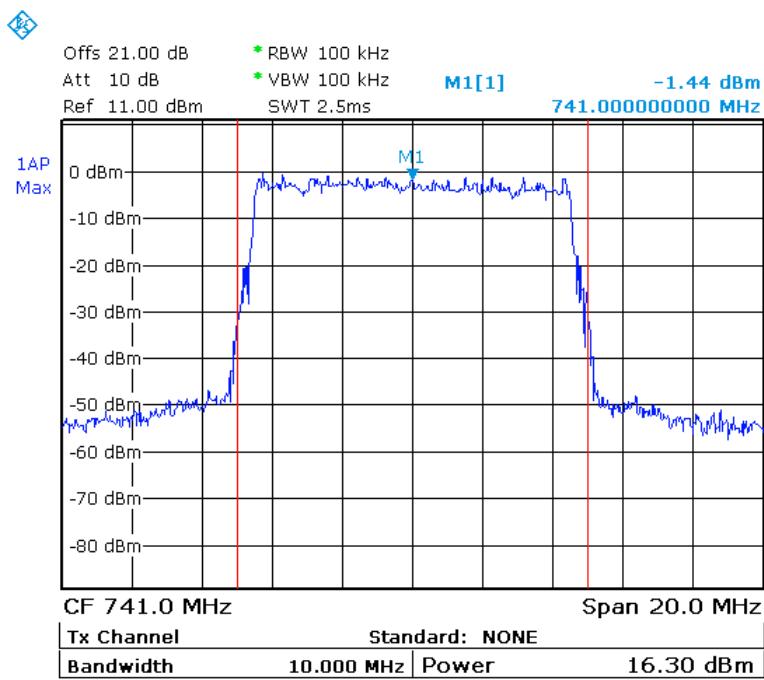

Date: 13.OCT.2010 14:34:03

Figure 13.— 741.00 MHz 16QAM

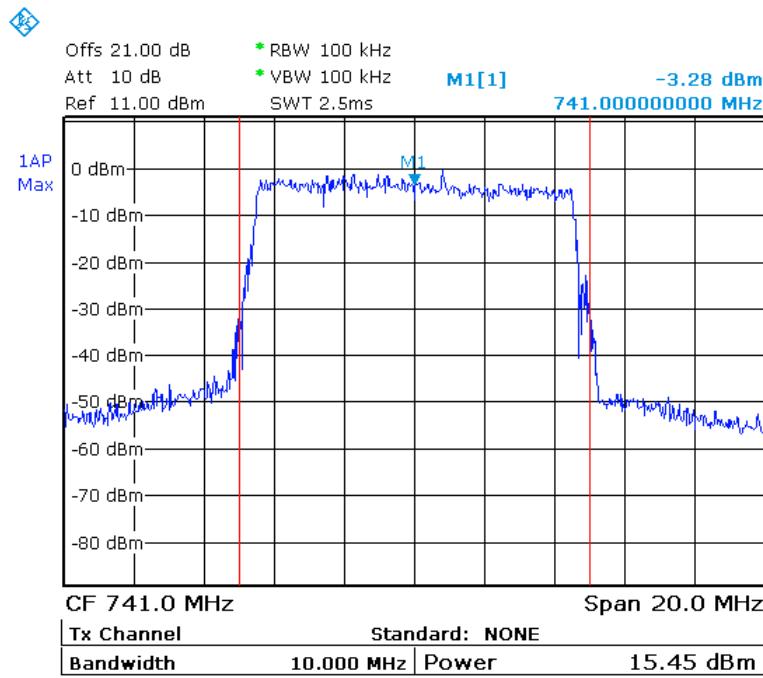


Figure 14.— 741.00 MHz 64QAM

5.3 Results table

E.U.T. Description: VE LTE 700 MHz MIMO Lower Band Comprising:

1. VE Control Unit 2. VE Access Pod

Model No.: 1. VCU-LTE700L-12E 2. VAP-LTE700LE-EXTAN

Serial Number: 1. 00101200036 2. 00101600069

Specification: FCC Part 27, Subpart C, Section 27.50 (h) (2)

Modulation	Operation Frequency (MHz)	Reading (dBm)	Antenna Gain (dB)	Reading (EIRP) (dBm)	Reading (EIRP) (mW)	MIMO Total (EIRP) (W)	Specification (W)
QPSK	733.0	15.79	7	22.79	190.11	0.38	1000
16QAM	733.0	16.39	7	23.39	218.27	0.44	1000
64QAM	733.0	16.11	7	23.11	204.64	0.41	1000
QPSK	741.0	15.88	7	22.88	194.09	0.39	1000
16QAM	741.0	16.30	7	23.30	213.80	0.43	1000
64QAM	741.0	15.45	7	22.45	175.79	0.35	1000

Note: The peak output power is the combined maximum conducted output power.

Figure 15 Maximum Peak Power Output

JUDGEMENT: Passed

TEST PERSONNEL:

Tester Signature:  Date: 02.12.10

Typed/Printed Name: A. Sharabi

5.4 **Test Equipment Used.**

Maximum Peak Output Power

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibration	Period
Spectrum Analyzer	RHODE&SCHWARZ	FSL6	100194	July 22, 2010	1 Year
Signal Generator	Agilent	E4438C	MY42082764	July 21, 2010	1 year
Attenuator	Jyebao	-	FAT-AM5AF5G6G 2W20	October 12, 2010	1 year
Cable	TestLINE	18	11556	October 12, 2010	1 year

Figure 16 Test Equipment Used

6. Emission Bandwidth

6.1 Test Specification

FCC Part 2, Section 1049; FCC Part 27 Section 27.53(m)(6)

6.2 Test Procedure

The E.U.T. was set to the applicable test frequency with OFDMA and 64QAM, 16QAM, QPSK 10 MHZ modulation in the 728-746MHz band.

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator (at the output test) and an appropriate coaxial cable (21.0dB). The spectrum analyzer was set to proper resolution B.W.

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limit, the mean powers radiated are each equal to 0.5% of the total mean power radiated by a given emission.

Occupied bandwidth measured was repeated in the input terminal of the E.U.T.



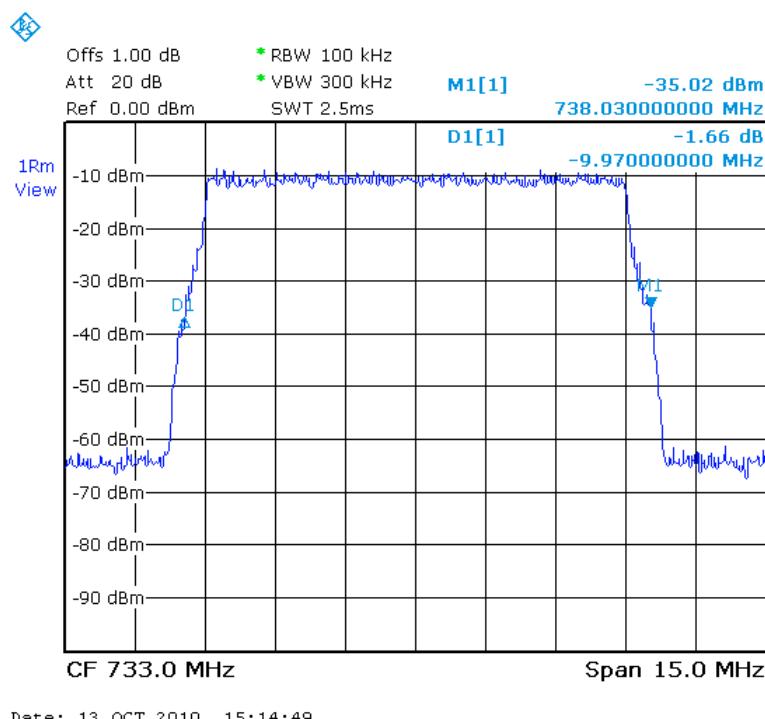


Figure 17.— 733.00 MHz QPSK IN

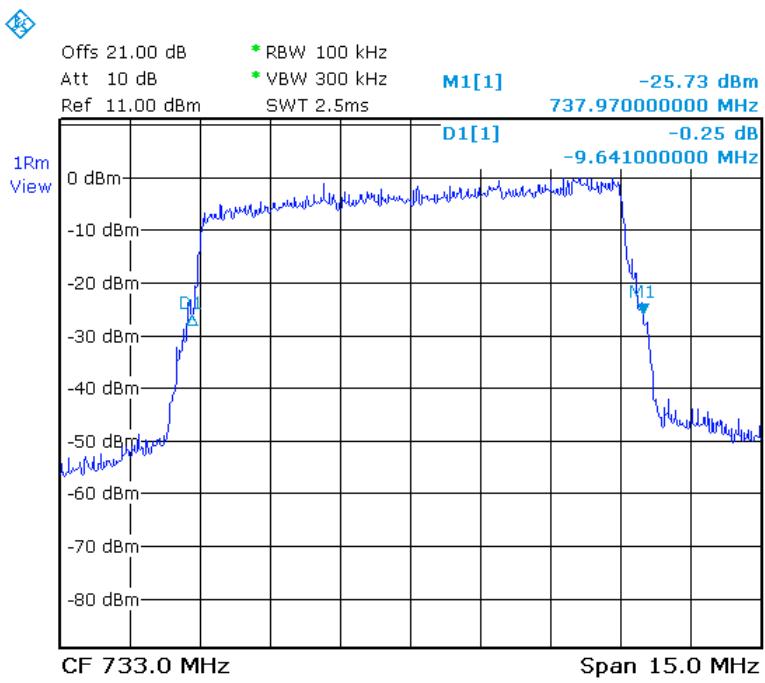

Date: 13.OCT.2010 15:07:04

Figure 18.— 733.00 MHz QPSK OUT

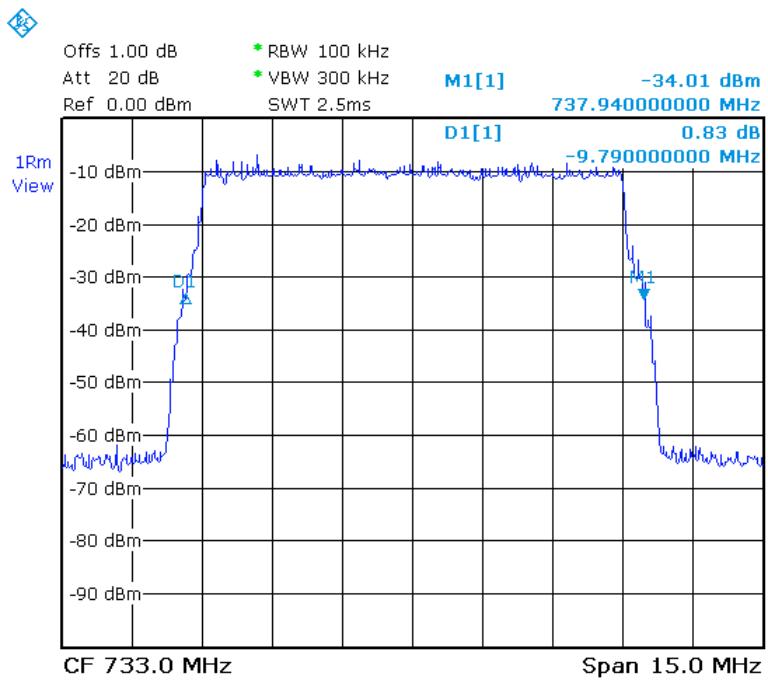

Date: 13.OCT.2010 15:12:50

Figure 19.— 733.00 MHz 16QAM IN

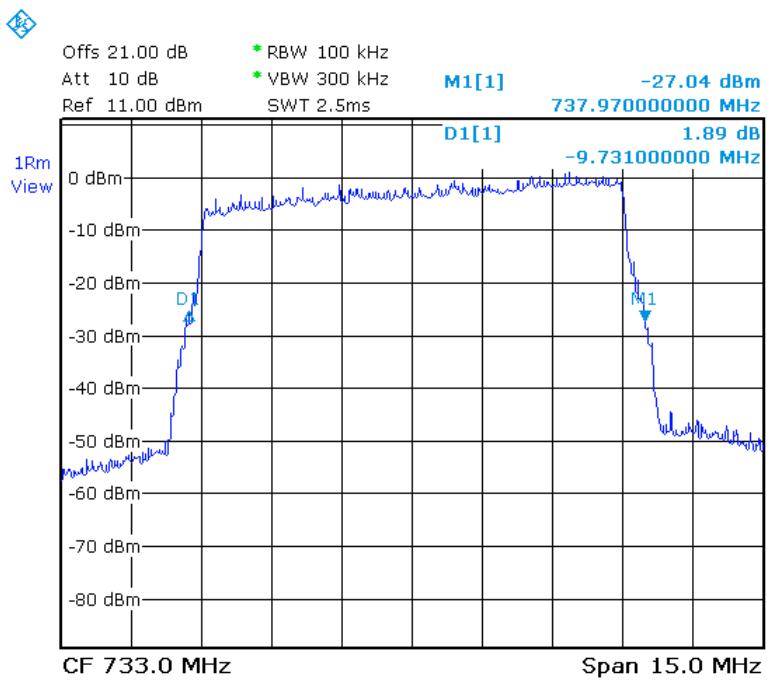


Figure 20.— 733.00 MHz 16QAM OUT



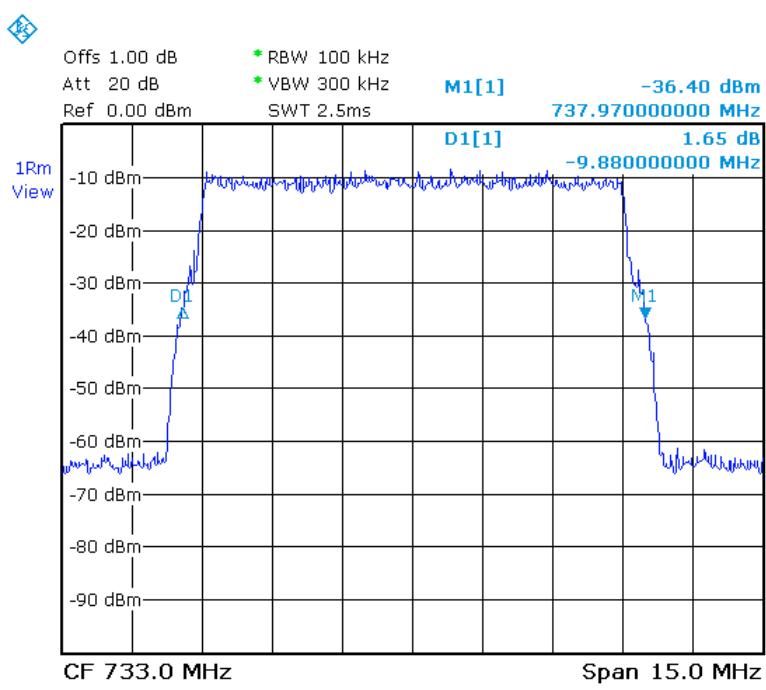


Figure 21.— 733.00 MHz 64QAM IN

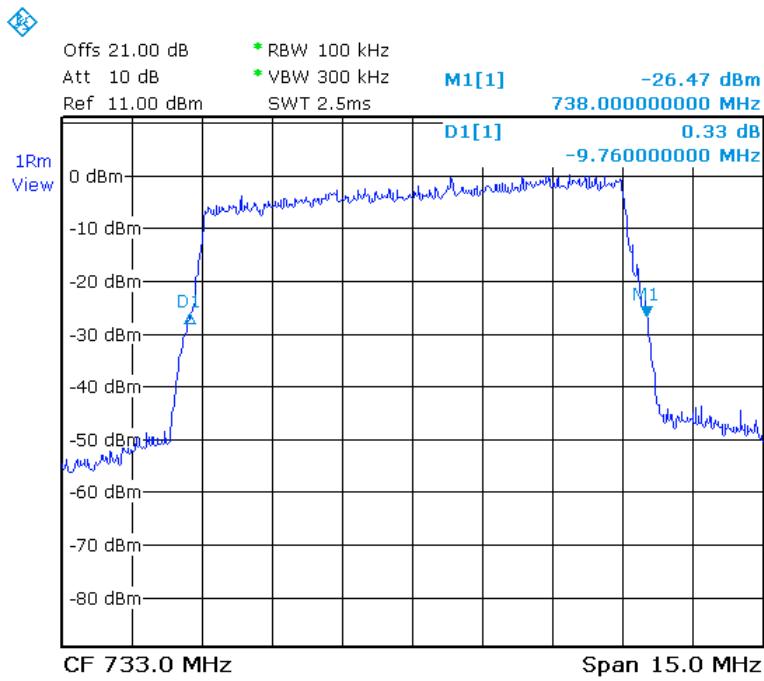


Date: 13.OCT.2010 15:08:06

Figure 22.— 733.00 MHz 64QAM OUT

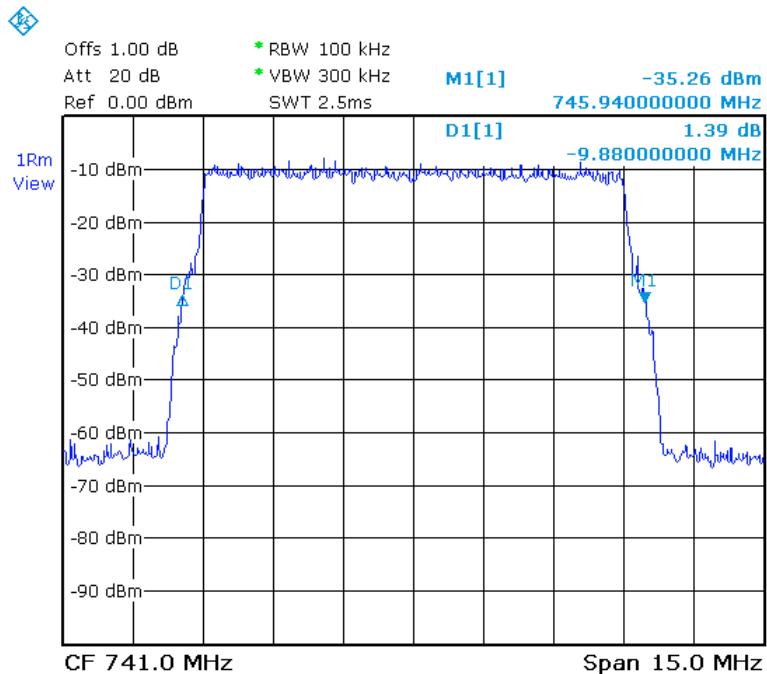


Date: 13.OCT.2010 15:16:02

Figure 23.— 741.00 MHz QPSK IN

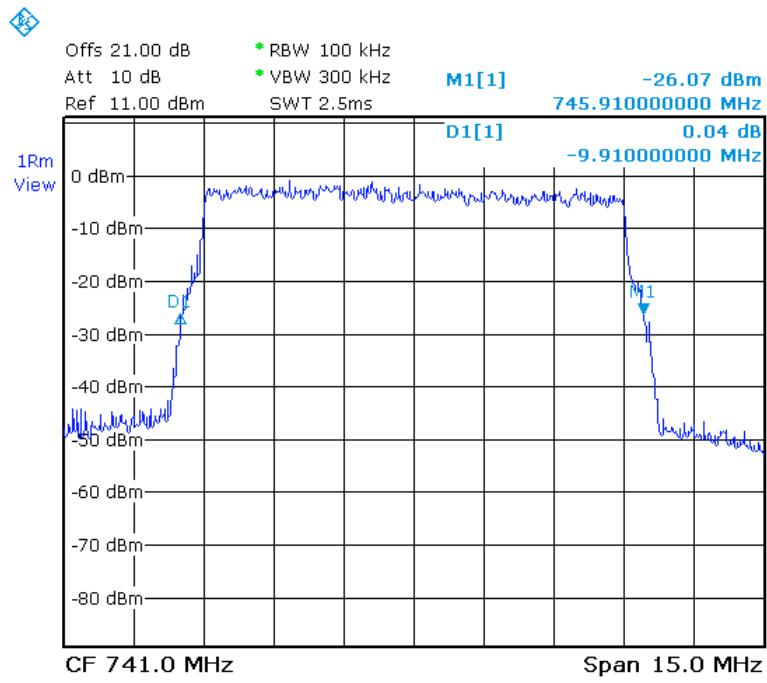


Date: 13.OCT.2010 15:04:20

Figure 24.— 741.00 MHz QPSK OUT

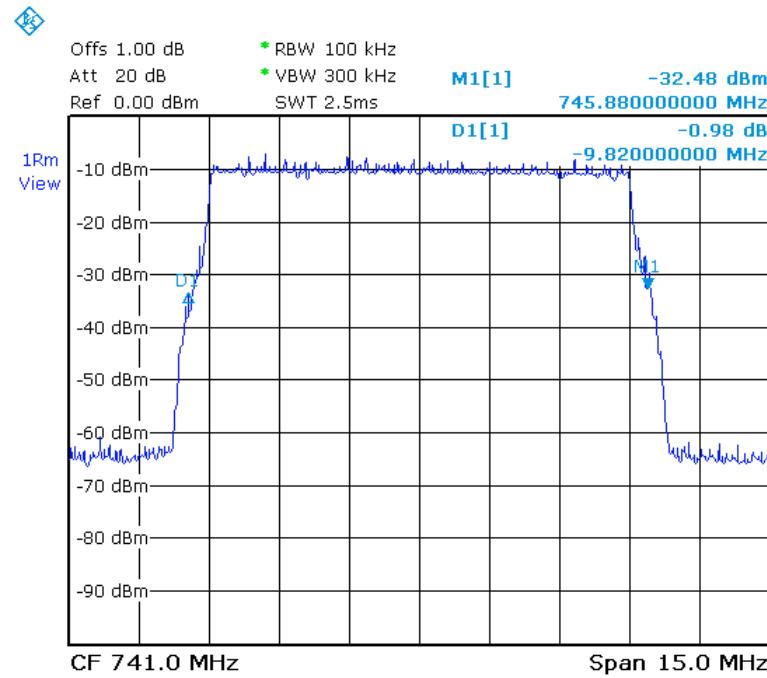


Date: 13.OCT.2010 15:17:17

Figure 25.— 741.00 MHz 16QAM IN

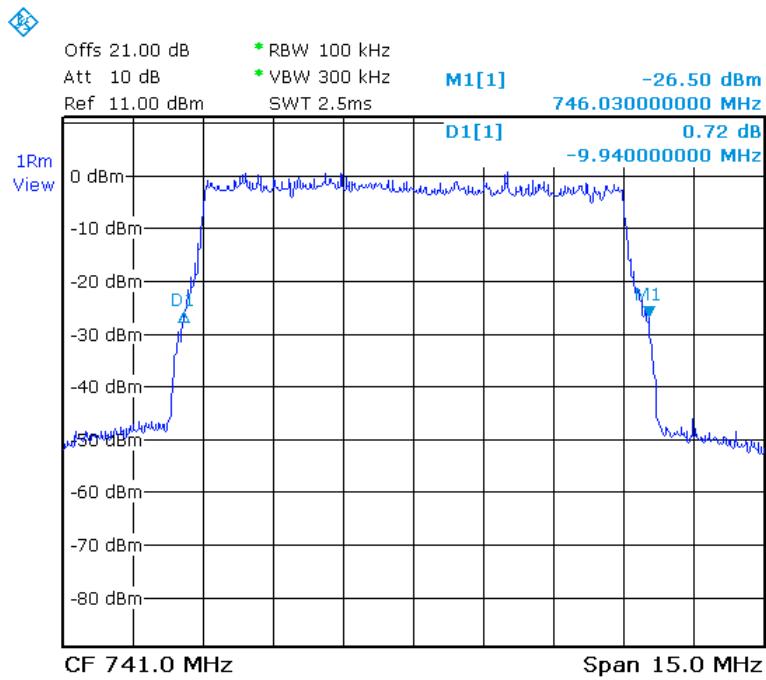

Date: 13.OCT.2010 15:02:03

Figure 26.— 741.00 MHz 16QAM OUT

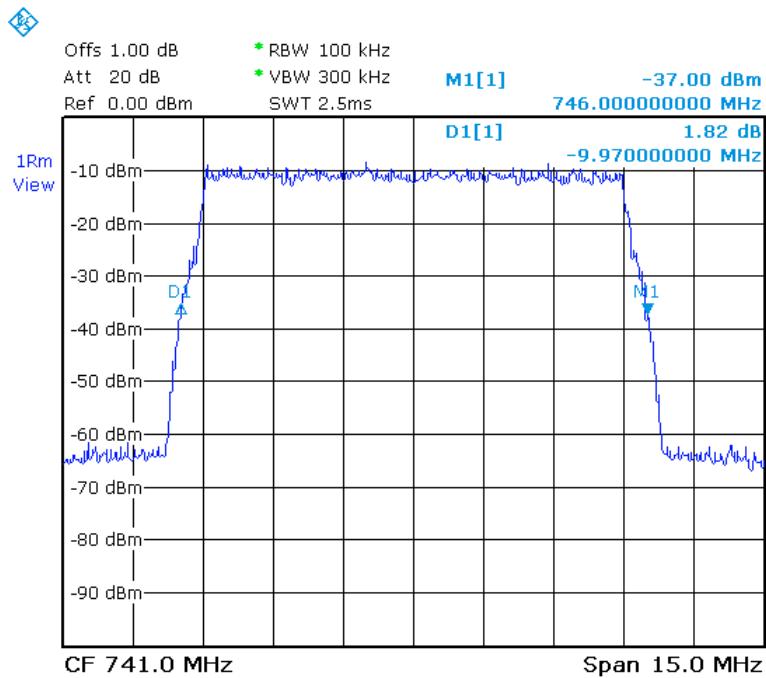

Date: 13.OCT.2010 15:18:17

Figure 27.— 741.00 MHz 64QAM IN

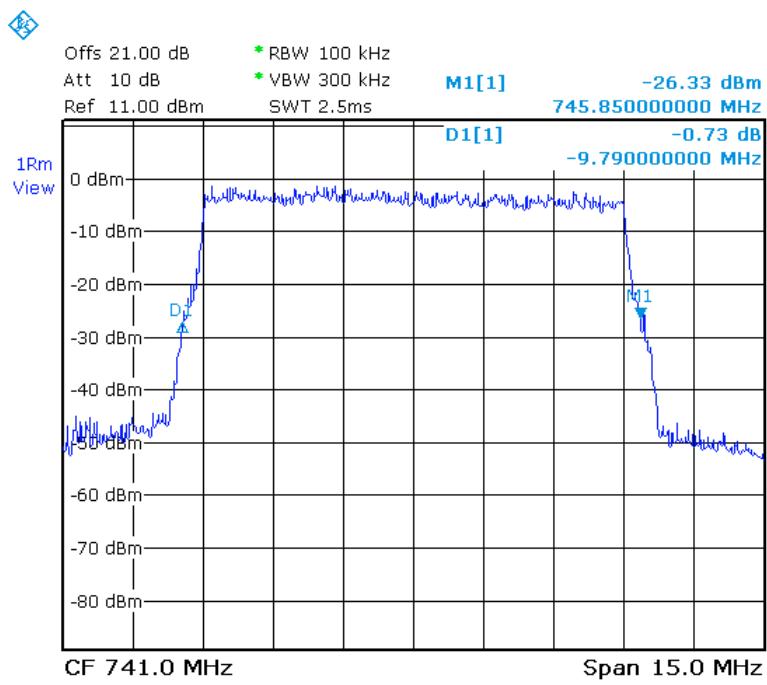


Figure 28.— 741.00 MHz 64QAM OUT

6.3 Results Table

E.U.T. Description: VE LTE 700 MHz MIMO Lower Band Comprising:

1. VE Control Unit 2. VE Access Pod

Model No.: 1. VCU-LTE700L-12E 2. VAP-LTE700LE-EXTAN

Serial Number: 1. 00101200036 2. 00101600069

Specification: FCC Part 2, Section 1049; FCC Part 27 Section 27.53(m)(6)

Operating Frequency (MHz)	Modulation		Reading (26dBc) (MHz)
733.00	QPSK	Input	9.97
		Output	9.64
	16QAM	Input	9.79
		Output	9.73
	64QAM	Input	9.88
		Output	9.76
741.00	QPSK	Input	9.88
		Output	9.91
	16QAM	Input	9.82
		Output	9.94
	64QAM	Input	9.97
		Output	9.79

Figure 29 Emission Bandwidth

JUDGEMENT: Passed

TEST PERSONNEL:

Tester Signature: A. Sharabi Date: 02.12.10

Typed/Printed Name: A. Sharabi

6.4 **Test Equipment Used.**

Occupied Bandwidth

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibration	Period
Spectrum Analyzer	RHODE&SCHWARZ	FSL6	100194	July 22, 2010	1 Year
Signal Generator	Agilent	E4438C	MY42082764	July 21, 2010	1 year
Attenuator	Jyebao	-	FAT- AM5AF5G6G 2W20	October 12, 2010	1 year
Cable	TestLINE	18	11556	October 12, 2010	1 year

Figure 30 Test Equipment Used

7. Conducted Spurious Emissions

7.1 *Test Specification*


FCC Part 27, Subpart C, Section 27.53 (m)

7.2 *Test procedure*

The power of any emission outside of the authorized operating frequency ranges 728 MHz-746 MHz must be attenuated below the transmitting power (P) by a factor of $43 + 10 \log (P)$ dB .


The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator and an appropriate coaxial cable (20.2dB).

The signal generator was configured for 0dBm output power and 10MHz LTE signal, modulated with 64QAM, 16QAM and QPSK

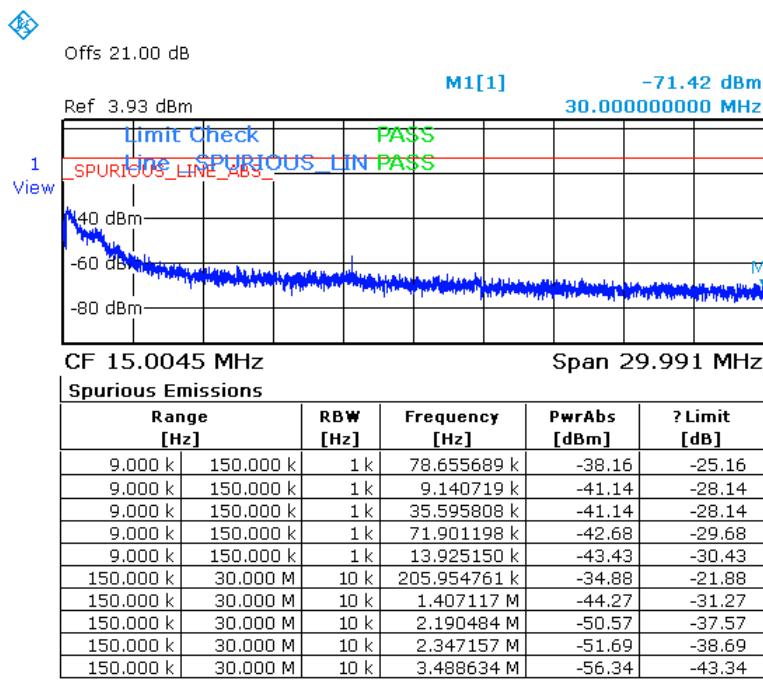


Date: 17.OCT.2010 09:44:18

Figure 31.— 733.00 MHz QPSK

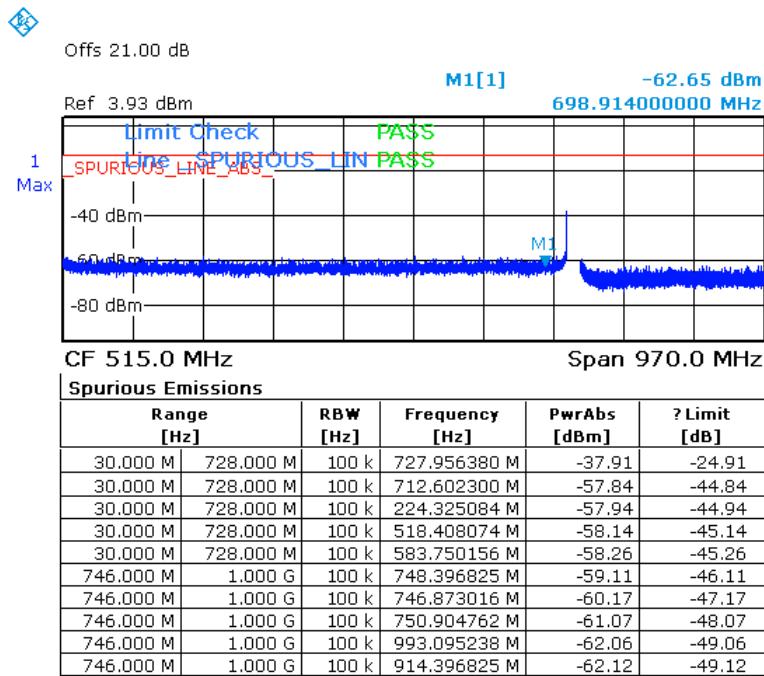

Date: 17.OCT.2010 09:57:32

Figure 32.— 733.00 MHz QPSK

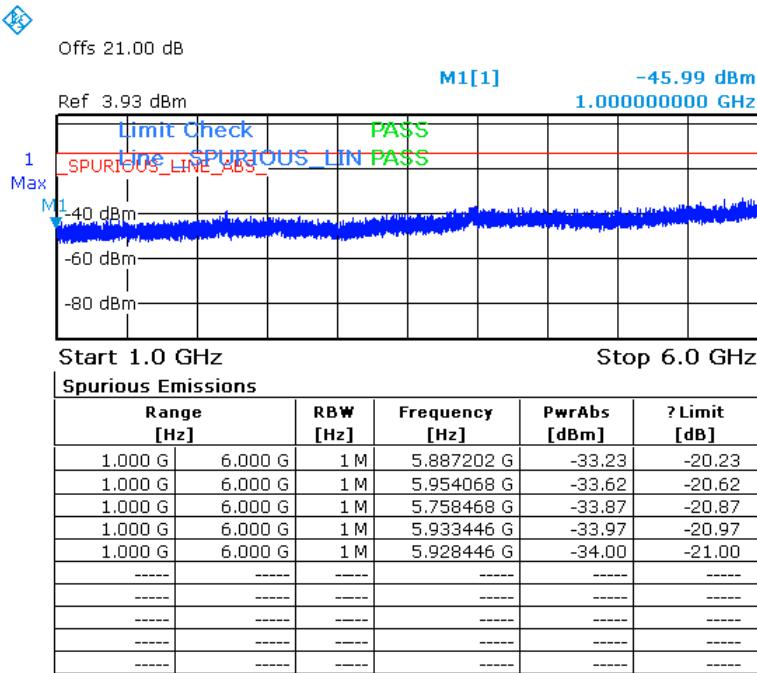

Date: 17.OCT.2010 09:59:16

Figure 33.— 733.00 MHz QPSK



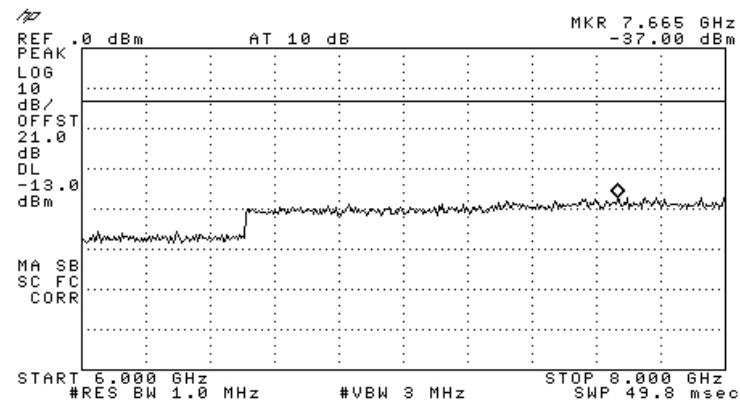


Figure 34.— 733.00 MHz QPSK

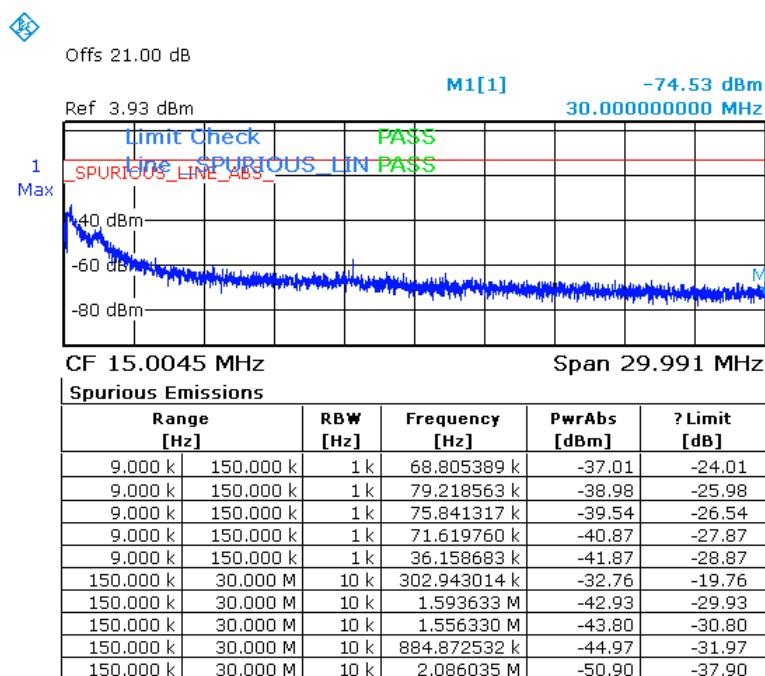


Date: 17.OCT.2010 09:45:43

Figure 35.— 733.00 MHz 16QAM

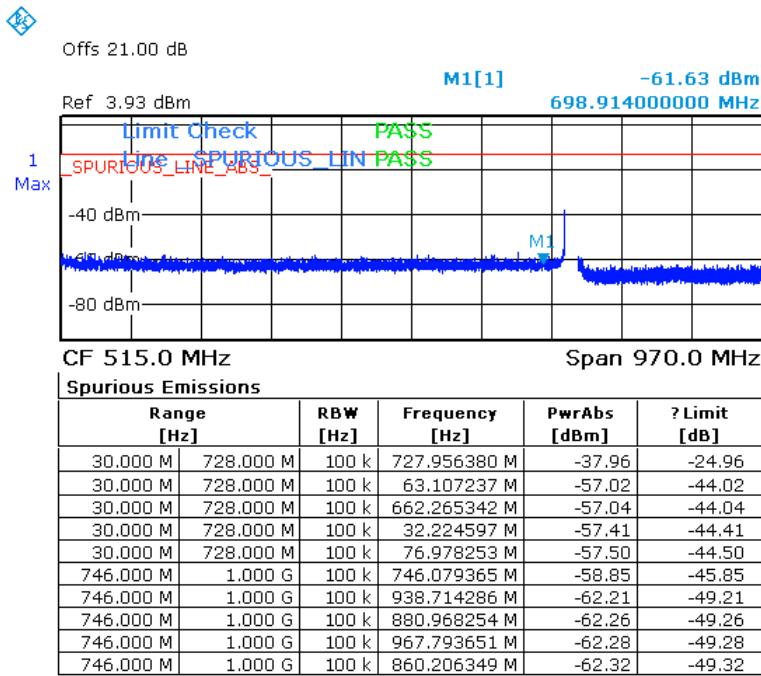

Date: 17.OCT.2010 09:56:30

Figure 36.— 733.00 MHz 16QAM

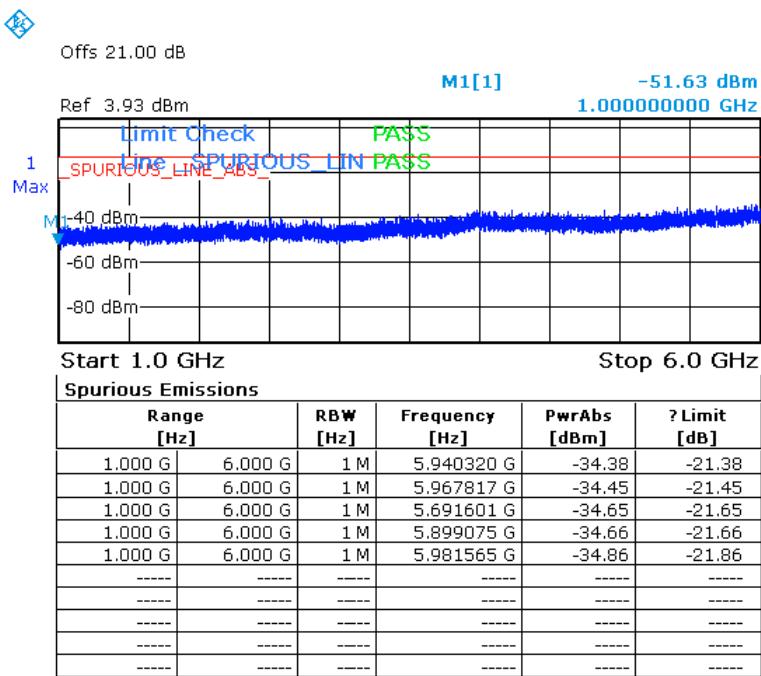

Date: 17.OCT.2010 10:00:38

Figure 37.— 733.00 MHz 16QAM

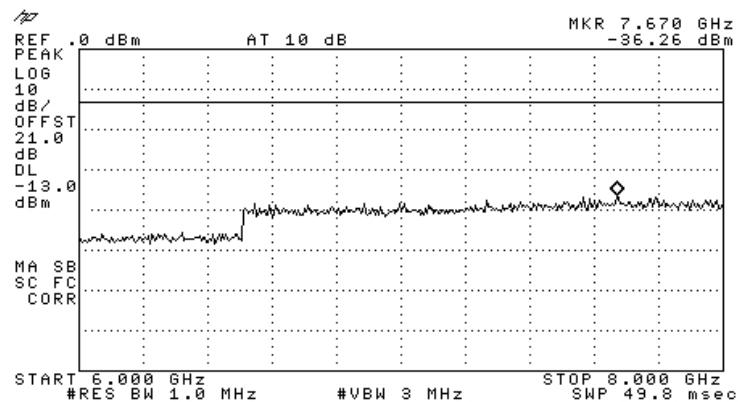


Figure 38.— 733.00 MHz 16QAM



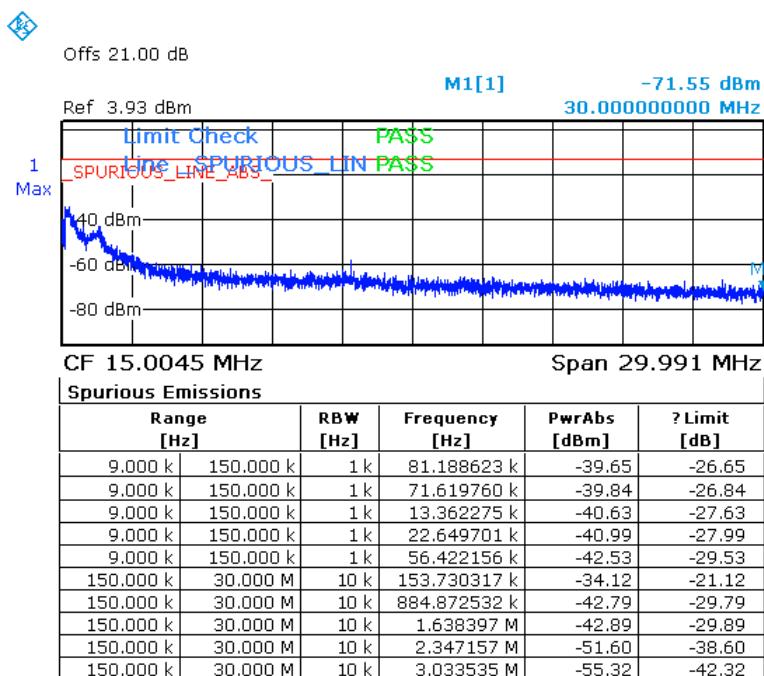


Figure 39.— 733.00 MHz 64QAM

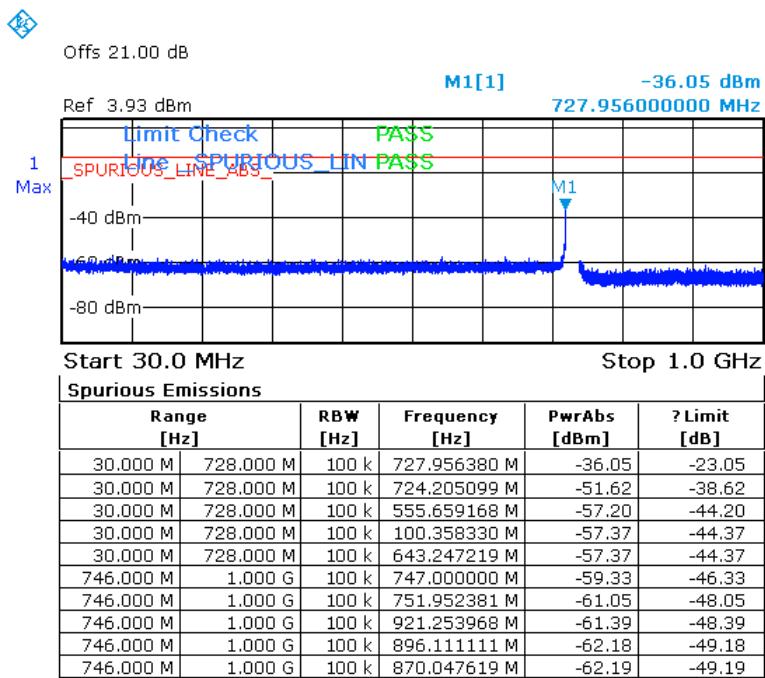

Date: 17.OCT.2010 09:55:11

Figure 40.— 733.00 MHz 64QAM

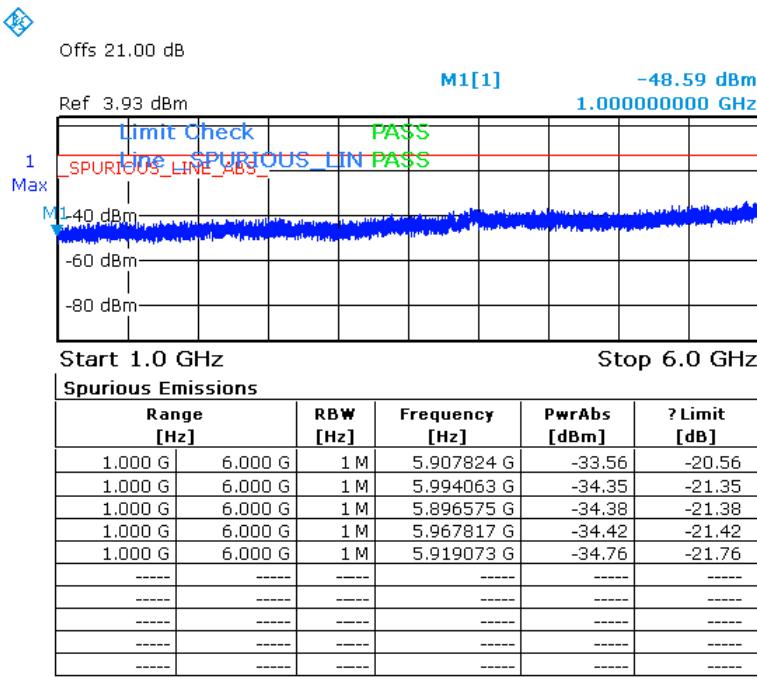

Date: 17.OCT.2010 10:01:34

Figure 41.— 733.00 MHz 64QAM

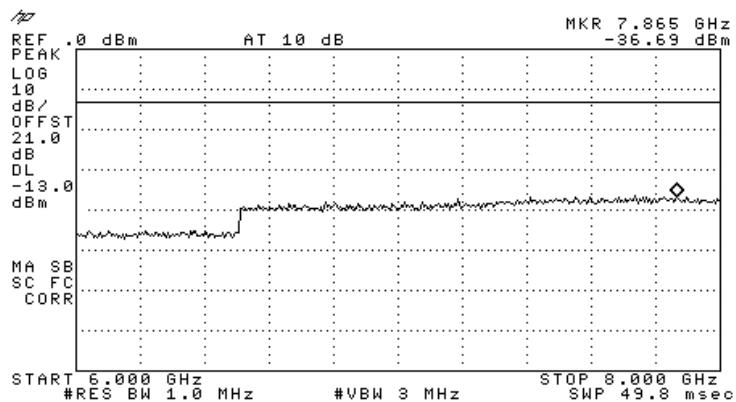


Figure 42.— 733.00 MHz 64QAM

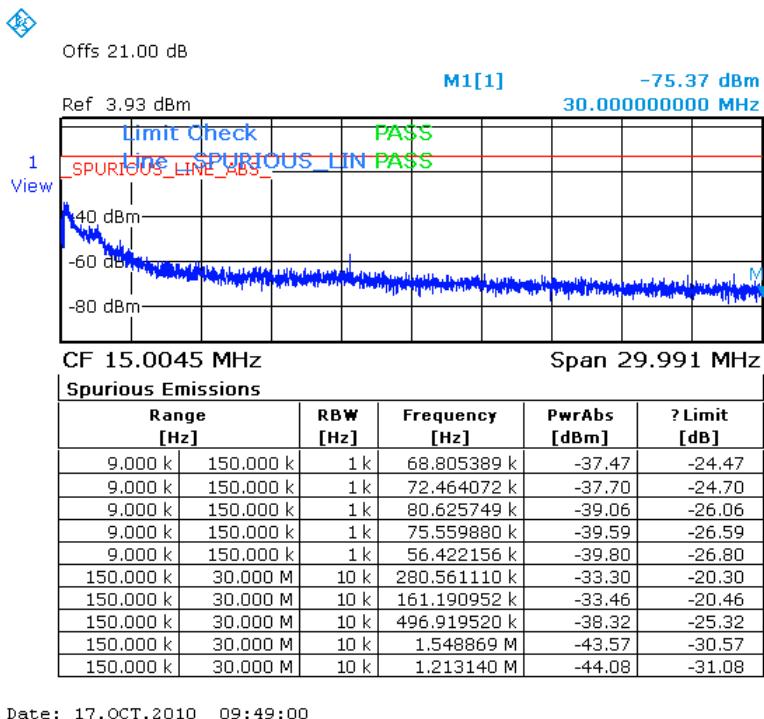


Figure 43.— 741.00 MHz QPSK

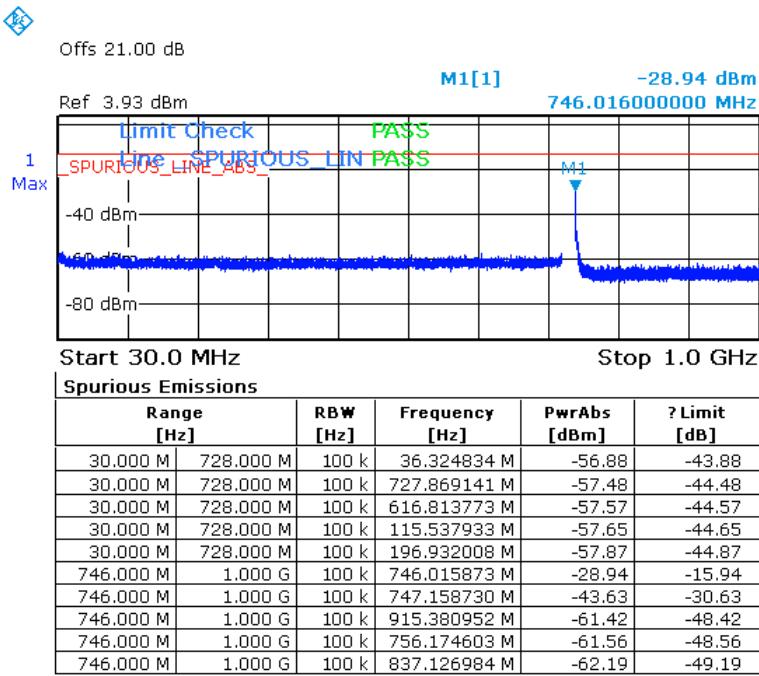
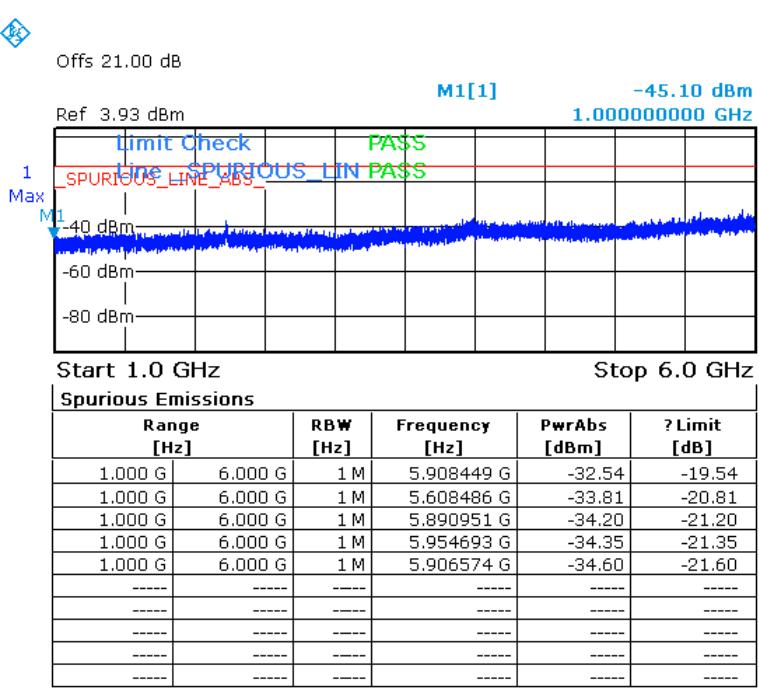


Figure 44 — 741.00 MHz QPSK





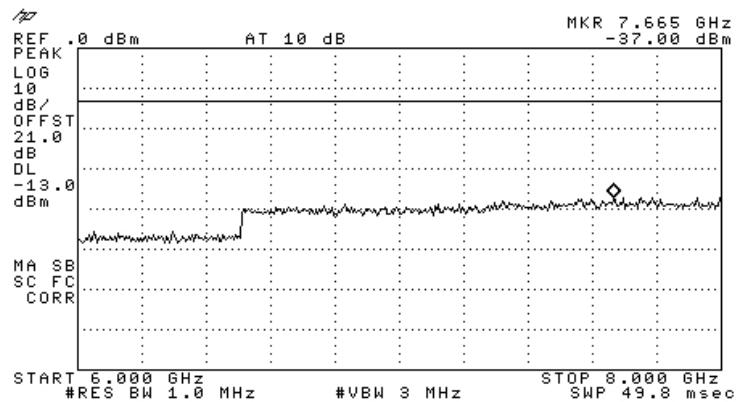


Figure 46.— 741.00 MHz QPSK

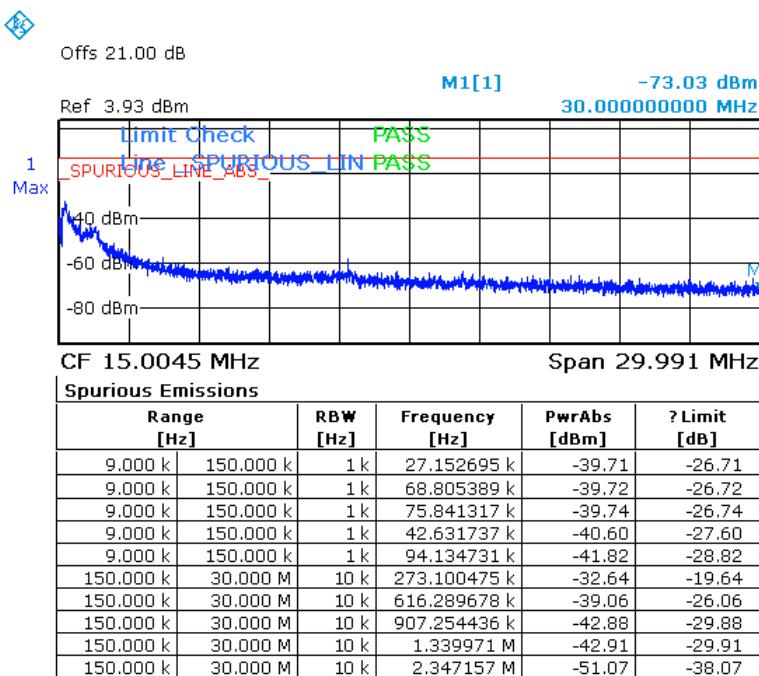


Date: 17.OCT.2010 09:48:21

Figure 47.— 741.00 MHz 16QAM

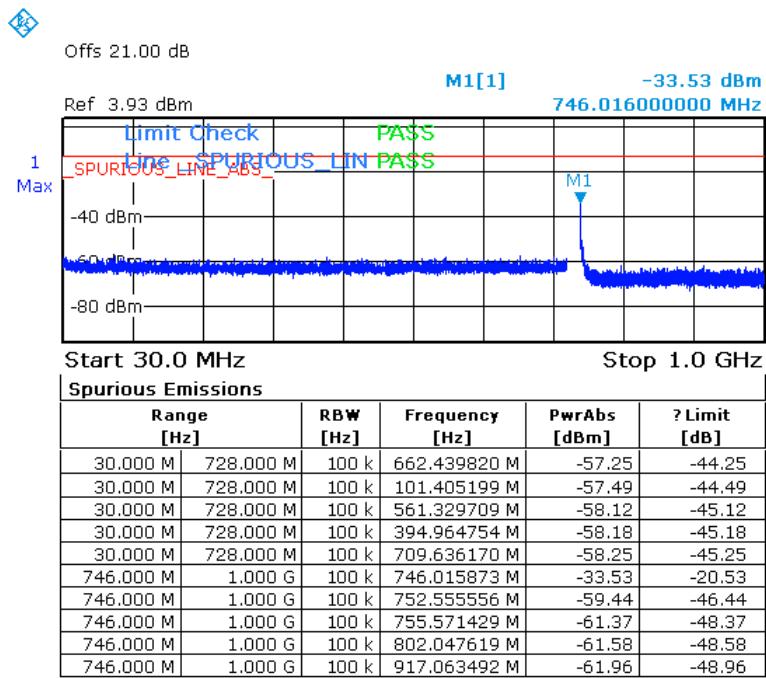

Date: 17.OCT.2010 09:52:19

Figure 48.— 741.00 MHz 16QAM

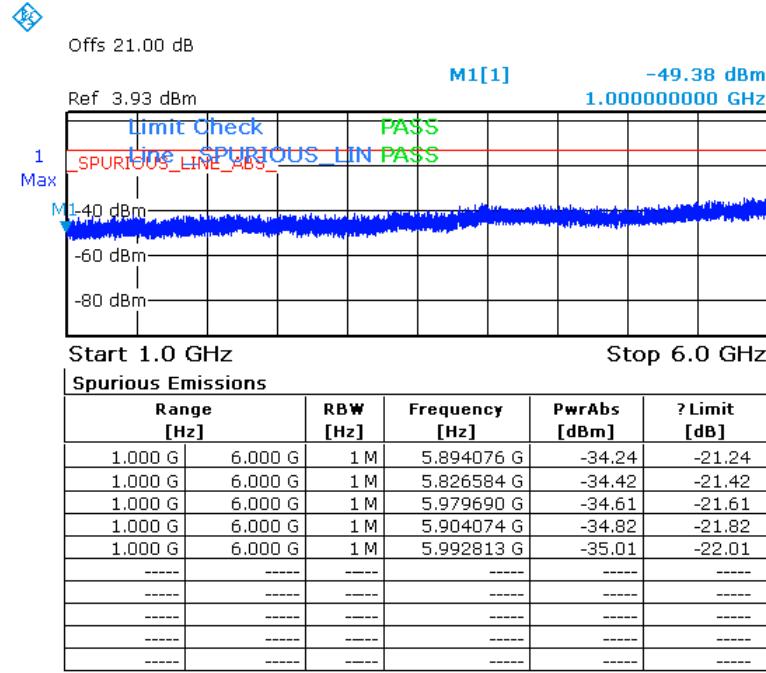

Date: 17.OCT.2010 10:04:20

Figure 49.— 741.00 MHz 16QAM



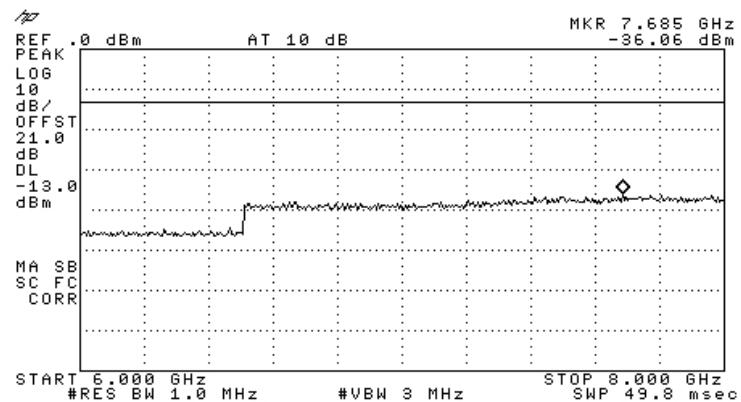


Figure 50.— 741.00 MHz 16QAM

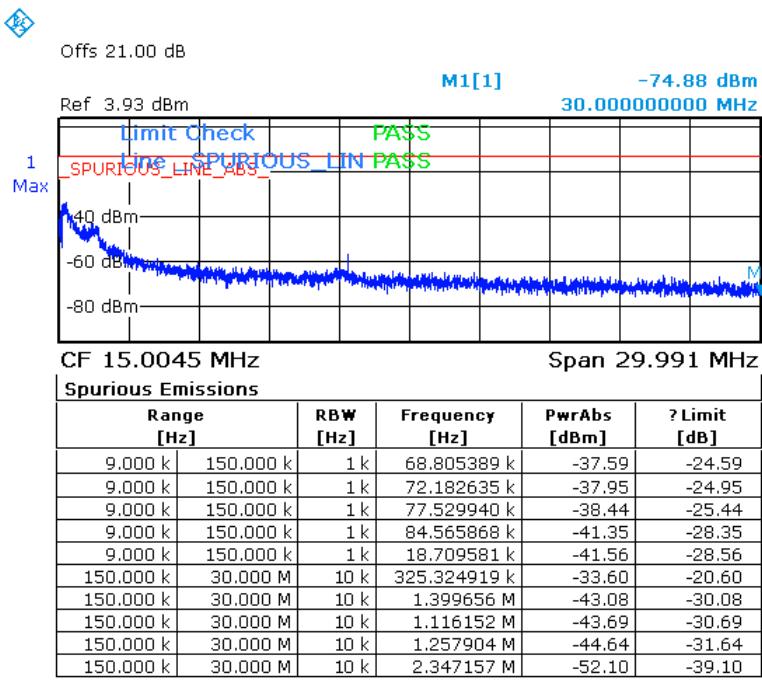


Date: 17.OCT.2010 09:47:17

Figure 51.— 741.00 MHZ 64QAM

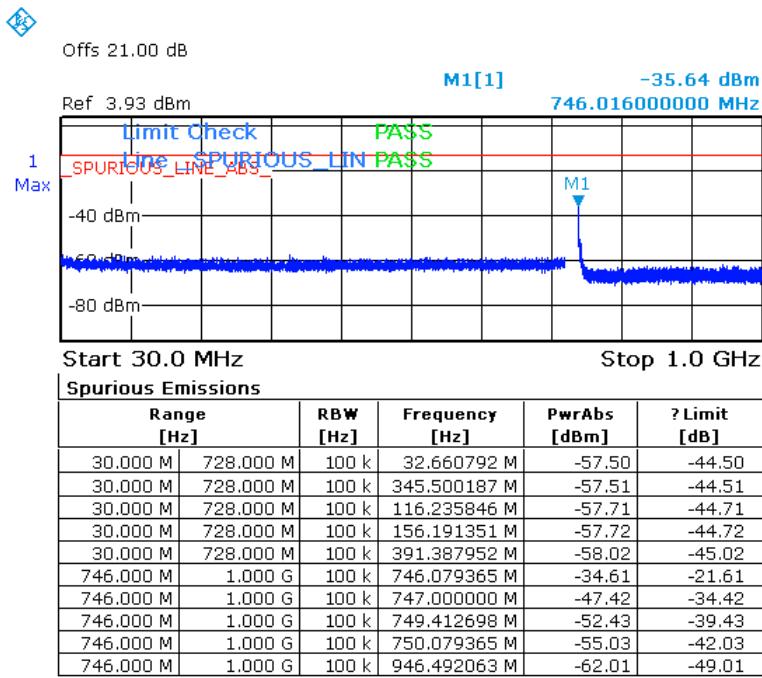

Date: 17.OCT.2010 09:53:47

Figure 52.— 741.00 MHZ 64QAM

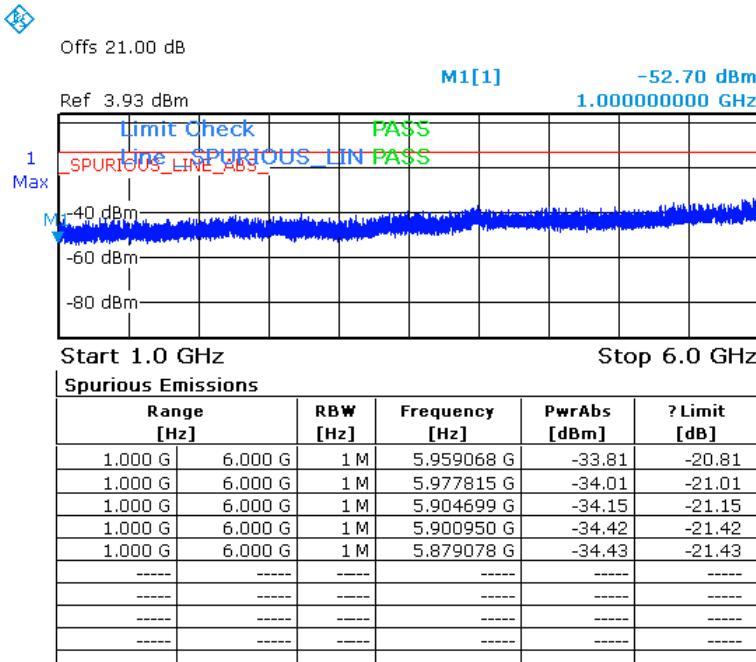

Date: 17.OCT.2010 10:03:15

Figure 53.— 741.00 MHZ 64QAM

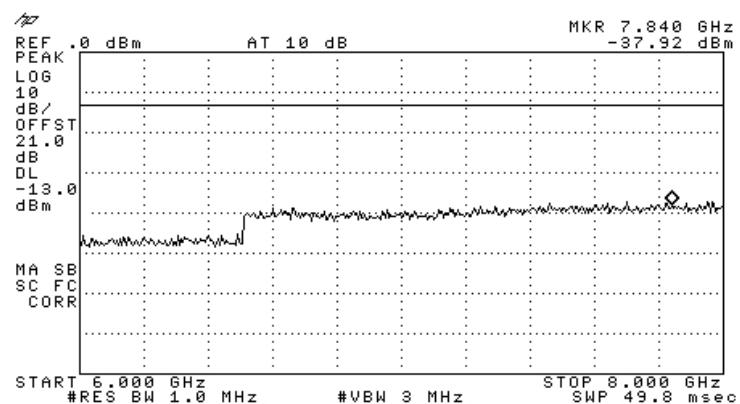


Figure 54.— 741.00 MHZ 64QAM

7.3 Results table

E.U.T. Description: VE LTE 700 MHz MIMO Lower Band Comprising:

1. VE Control Unit 2. VE Access Pod

Model No.: 1. VCU-LTE700L-12E 2. VAP-LTE700LE-EXTAN

Serial Number: 1. 00101200036 2. 00101600069

Specification: FCC Part 27, Subpart C, Section 27.53 (m)

Modulation	Operation Frequency	Frequency (MHz)	Reading (dBm)	Specification (dBm)	Margin (dB)
QPSK	733.0	7665.00	-37.00	-13.0	-24.00
16QAM		7670.00	-36.26	-13.0	-23.26
64QAM		727.95	-36.05	-13.0	-23.05
QPSK	741.0	746.01	-28.94	-13.0	-15.94
16QAM		746.01	-33.53	-13.0	-20.53
64QAM		746.01	-35.64	-13.0	-22.64

Figure 55 Conducted Spurious Emission Results

JUDGEMENT: Passed by 15.9 dB

TEST PERSONNEL:

Tester Signature: 

Date: 02.12.10

Typed/Printed Name: A. Sharabi

7.4 **Test Equipment Used.**

Spurious Emissions at Antenna Terminals

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibration	Period
Spectrum Analyzer	HP	8592L	3826A01204	March 14, 2010	1 year
Spectrum Analyzer	RHODE&SCHWARZ	FSL6	100194	July 22, 2010	1 Year
Signal Generator	Agilent	E4438C	MY42082764	July 21, 2010	1 year
Attenuator	Jyebao	-	FAT- AM5AF5G6G 2W20	October 12, 2010	1 year
Cable	TestLINE	18	11556	October 12, 2010	1 year

Figure 56 Test Equipment Used

8. Band Edge Measurements

8.1 Test Specification

FCC Part 27, Subpart C, Section 27.53 (m)

8.2 Test procedure

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + \log(P)$ dB, yielding -13 dBm.

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator and an appropriate coaxial cable (21.0 dB).

The spectrum analyzer was set to 100 kHz R.B.W.

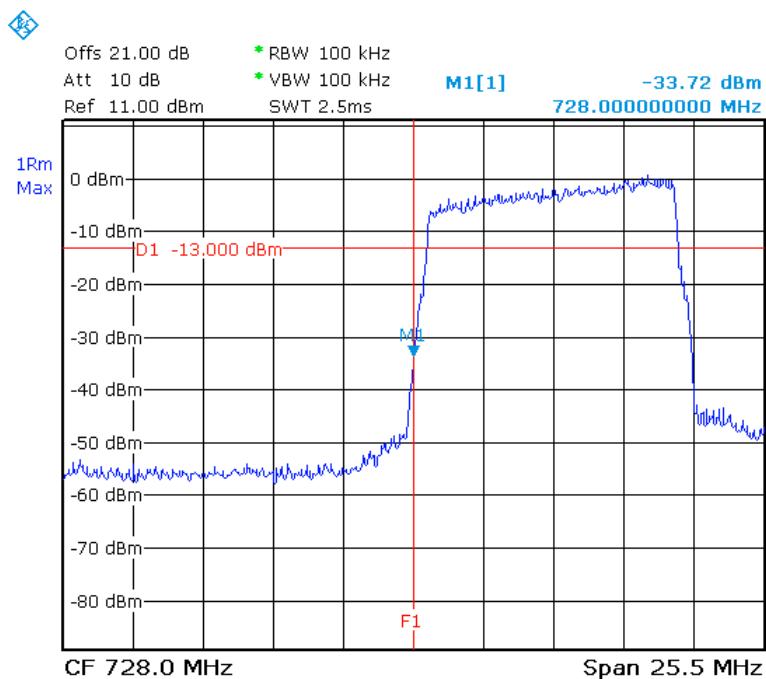


Figure 57.— 733.00 MHz QPSK

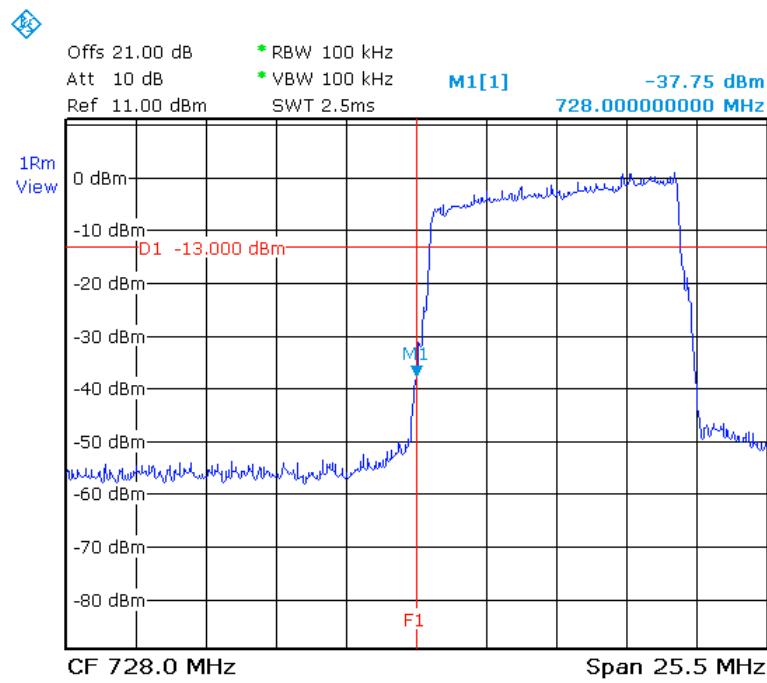


Figure 58.— 733.00 MHz 16QAM



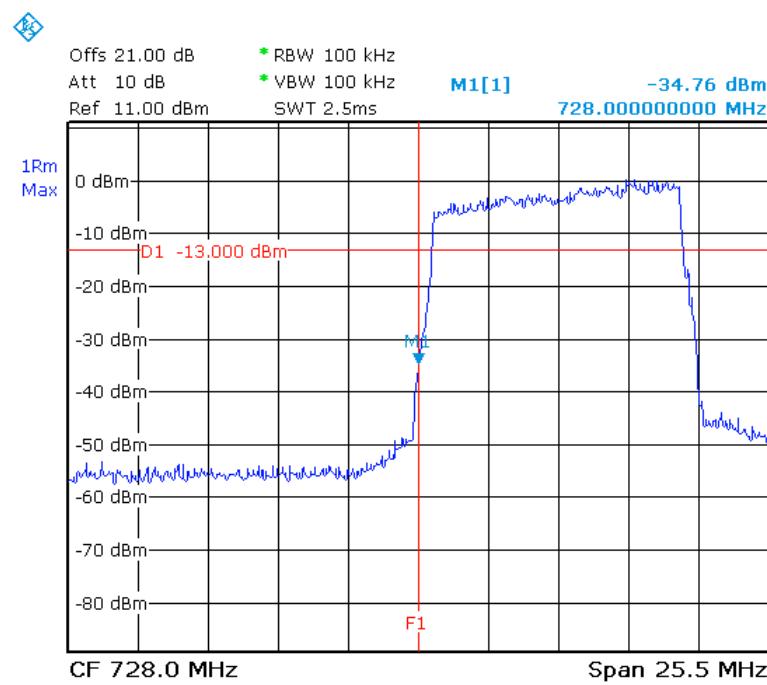


Figure 59.— 733.00 MHz 64QAM

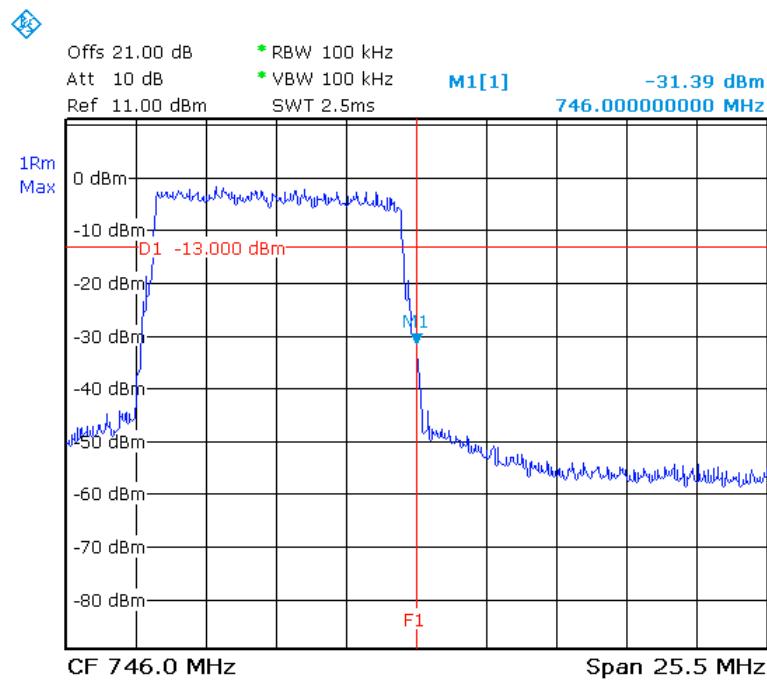


Date: 13.OCT.2010 14:50:16

Figure 60.— 741.00 MHz QPSK

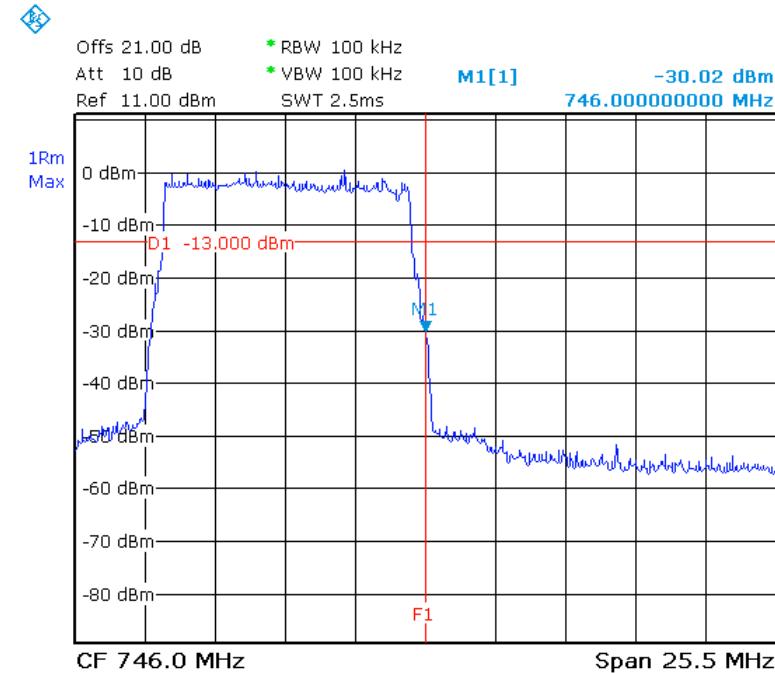

Date: 13.OCT.2010 14:51:09

Figure 61.— 741.00 MHz 16QAM

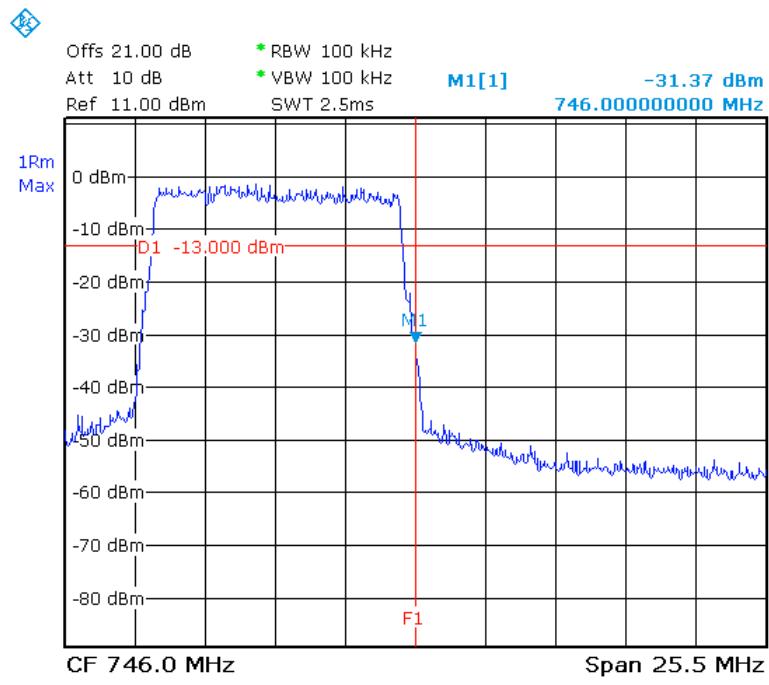

Date: 13.OCT.2010 14:48:59

Figure 62.— 741.00 MHz 64QAM

8.3 Results table

E.U.T. Description: VE LTE 700 MHz MIMO Lower Band Comprising:
 1. VE Control Unit 2. VE Access Pod
 Model No.: 1. VCU-LTE700L-12E 2. VAP-LTE700LE-EXTAN
 Serial Number: 1. 00101200036 2. 00101600069
 Specification: FCC Part 27, Subpart C, Section 27.53 (m)

Bandwidth	Operation Frequency (MHz)	Frequency (MHz)	Reading (dBm)	Specification (dBm)	Margin (dB)
QPSK	733.0	728.00	-33.72	-13.0	-20.72
	741.0	746.00	-31.39	-13.0	-18.39
16QAM	733.0	728.00	-37.75	-13.0	-24.75
	741.0	746.00	-30.02	-13.0	-17.02
64QAM	733.0	728.00	-34.76	-13.0	-21.76
	741.0	746.00	-31.37	-13.0	-18.37

Figure 63 Band Edge Measurements Results

JUDGEMENT: Passed by 17.02 dB

TEST PERSONNEL:

Tester Signature:  Date: 02.12.10

Typed/Printed Name: A. Sharabi

8.4 Test Equipment Used.

Band Edge Measurements

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibration	Period
Spectrum Analyzer	RHODE&SCHWARZ	FSL6	100194	July 22, 2010	1 Year
Signal Generator	Agilent	E4438C	MY42082764	July 21, 2010	1 year
Attenuator	Jyebao	-	FAT- AM5AF5G6G 2W20	October 12, 2010	1 year
Cable	TestLINE	18	11556	October 12, 2010	1 year

Figure 64 Test Equipment Used

9. Spurious Radiated Emission

9.1 ***Test Specification***

FCC, Part 27, Subpart C Section 27.53 (m)

9.2 ***Test Procedure***

The test method was based on ANSI/TIA-603-D: 2010, Section 2.2.12
Unwanted Emissions: Radiated Spurious.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB, yielding -13 dBm.

- (a) The E.U.T. operation mode and test set-up are as described in Section 3. A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 1.

The frequency range 9 kHz-20 GHz was scanned and the list of the highest emissions was verified and updated accordingly.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization. The emissions were measured at a distance of 3 meters.

- (b) The E.U.T. was replaced by a substitution antenna (dipole 30MHz-1GHz, Horn Antenna above 1GHz) driven by a signal generator. The height was readjusted for maximum reading. The signal generator level was adjusted to obtain the same reading on the EMI receiver as in step (a).

The signals observed in step (a) were converted to radiated power using:
 $P_d(\text{dBm}) = P_g(\text{dBm}) - \text{Cable Loss (dB)} + \text{Substitution Antenna Gain (dB)}$

P_d = Dipole equivalent power (result).

P_g = Signal generator output level.

The controller was connected to 2 signal generators on the same RF channel (one OFDMA modulated and the other CW).

Both Signal generators were 0dBm output power.

The E.U.T. was tested in downlink mode.

733 MHz

2nd Harmonic:

Modulation	Freq. (MHz)	Antenna Pol.	Maximum Peak Level (dB μ V/m)	Signal Generator RF Output (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	Effective Radiated Power Level (dBm)	Spec. (dBm)	Margin (dB)
QPSK	1466.10	V	57.5	-43.79	5.15	7.6	-41.34	-13.0	-28.34
QPSK	1466.10	H	58.4	-43.03	5.15	7.6	-40.58	-13.0	-27.58
16QAM	1466.10	V	56.5	-44.79	5.15	7.6	-42.34	-13.0	-29.34
16QAM	1466.10	H	57.2	-44.23	5.15	7.6	-41.78	-13.0	-28.78
64QAM	1466.10	V	57.6	-43.69	5.15	7.6	-41.24	-13.0	-28.24
64QAM	1466.10	H	56.8	-44.63	5.15	7.6	-42.18	-13.0	-29.18

3rd Harmonic:

Modulation	Freq. (MHz)	Antenna Pol.	Maximum Peak Level (dB μ V/m)	Signal Generator RF Output (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	Effective Radiated Power Level (dBm)	Spec. (dBm)	Margin (dB)
QPSK	2199.10	V	62.4	-38.49	6.85	7.98	-37.36	-13.0	-24.36
QPSK	2199.10	H	63.1	-38.49	6.85	7.98	-37.36	-13.0	-24.36
16QAM	2199.10	V	62.2	-38.69	6.85	7.98	-37.56	-13.0	-24.56
16QAM	2199.10	H	61.3	-40.4	6.85	7.98	-39.27	-13.0	-26.27
64QAM	2199.10	V	60.5	-40.39	6.85	7.98	-39.26	-13.0	-26.26
64QAM	2199.10	H	61.4	-40.3	6.85	7.98	-39.17	-13.0	-26.17

IF:

Modulation	Freq. (MHz)	Antenna Pol.	Maximum Peak Level (dB μ V/m)	Signal Generator RF Output (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	Effective Radiated Power Level (dBm)	Spec. (dBm)	Margin (dB)
64QAM	261.20	H	55.35	-42.46	1.9	1.47	-42.89	-13.0	-29.89
64QAM	261.20	V	50.02	-47.79	1.9	1.47	-48.22	-13.0	-35.22
64QAM	281.20	H	50.35	-48.36	1.9	1.47	-48.79	-13.0	-35.79
64QAM	281.20	V	49.57	-47.6	2.1	1.35	-48.35	-13.0	-35.35

741 MHz

2nd Harmonic:

Modulation	Freq. (MHz)	Antenna Pol.	Maximum Peak Level (dB μ V/m)	Signal Generator RF Output (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	Effective Radiated Power Level (dBm)	Spec. (dBm)	Margin (dB)
QPSK	1482.50	V	60.2	-41.09	5.15	7.6	-38.64	-13.0	-25.64
QPSK	1482.50	H	60.3	-41.13	5.15	7.6	-38.68	-13.0	-25.68
16QAM	1482.50	V	59.8	-41.49	5.15	7.6	-39.04	-13.0	-26.04
16QAM	1482.50	H	59.9	-41.53	5.15	7.6	-39.08	-13.0	-26.08
64QAM	1482.50	V	60.2	-41.09	5.15	7.6	-38.64	-13.0	-25.64
64QAM	1482.50	H	61.2	-40.23	5.15	7.6	-37.78	-13.0	-24.78

3rd Harmonic:

Modulation	Freq. (MHz)	Antenna Pol.	Maximum Peak Level (dB μ V/m)	Signal Generator RF Output (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	Effective Radiated Power Level (dBm)	Spec. (dBm)	Margin (dB)
QPSK	2223.50	V	65.3	-35.59	6.85	7.98	-34.46	-13.0	-21.46
QPSK	2223.50	H	65.4	-36.3	6.85	7.98	-35.17	-13.0	-22.17
16QAM	2223.50	V	64.9	-35.99	6.85	7.98	-34.86	-13.0	-21.86
16QAM	2223.50	H	64.7	-37	6.85	7.98	-35.87	-13.0	-22.87
64QAM	2223.50	V	65.5	-35.39	6.85	7.98	-34.26	-13.0	-21.26
64QAM	2223.50	H	65.1	-36.6	6.85	7.98	-35.47	-13.0	-22.47

IF:

Modulation	Freq. (MHz)	Antenna Pol.	Maximum Peak Level (dB μ V/m)	Signal Generator RF Output (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	Effective Radiated Power Level (dBm)	Spec. (dBm)	Margin (dB)
64QAM	261.20	H	56.20	-42.51	1.9	1.47	-42.94	-13.0	-29.94
64QAM	261.20	V	52.34	-45.47	1.9	1.47	-45.90	-13.0	-32.90
64QAM	281.20	H	50.47	-49.26	2.1	1.35	-50.01	-13.0	-37.01
64QAM	281.20	V	50.56	-46.61	2.1	1.35	-47.36	-13.0	-34.36

9.3 Test Results

JUDGEMENT: Passed by 21.26 dB

The E.U.T met the requirements of the FCC, Part 27, Subpart C, Section 27.53 specifications.

TEST PERSONNEL:

Tester Signature:  Date: 02.12.10

Typed/Printed Name: A. Sharabi

9.4 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3411A00102	November 10, 2009	1 year
RF Section	HP	85420E	3427A00103	November 10, 2009	1 year
Antenna Log Periodic	A.H. Systems	SAS-200/511	253	January 29, 2009	2 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	ThinkJet 2225	2738508357.0	N/A	N/A
Spectrum Analyzer	HP	8592L	3826A01204	March 14, 2010	1 year
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS-0411N313	013	January 13, 2010	1 year
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	January 13, 2010	1 year
Signal Generator	Agilent	E4438C	MY42082764	July 21, 2010	2 years
Double Ridged Waveguide Horn Antenna	EMCO	3115	29845	March 16, 2010	2 year

10. Frequency Stability

10.1 Test Specification

Part 27 Section 27.54

10.2 Test Procedure

The E.U.T operation mode and test setup are as described in Section 2. The E.U.T. was operated with a CW signal in the downlink path.

The E.U.T. was placed inside a temperature chamber. The E.U.T. was operated from 115 VAC at normal temperature and the chamber temperature was set to +20°C.

The spectrum analyzer was set to 50.0 kHz span and 1.0 kHz resolution B.W.

The carrier frequency was measured and recorded (reference frequency reading).

The carrier frequency measurement was repeated for:

- (a). +20°C and 97.5 VAC
- (b). +20°C and 132.5 VAC
- (c). -30°C and 97.5 VAC
- (d). -30°C and 115 VAC
- (e). -30°C and 132.5 VAC
- (f). +50°C and 97.5 VAC
- (g). +50°C and 115 VAC
- (h). +50°C and 132.5 VAC

The carrier frequency was measured and recorded after at least 20 minutes of exposing the E.U.T. to the temperature.

The E.U.T. was operated at 733.00 and 741.00 MHz.

Frequency Stability

E.U.T Description VE LTE 700 MHz MIMO Lower Band Comprising:
 1. VE Control Unit 2. VE Access Pod

Type 1. VCU-LTE700L-12E 2. VAP-LTE700LE-EXTAN

Serial Number: 1. 00101200036 2. 00101600069

Specification: Part 27 Section 27.54

Operation Frequency (MHz)				$\Delta f(\text{max})$ (kHz)	Spec. (kHz)
	Temp	Volt	Readings		
733.00	+20°C	97.5	732.999900 MHz	+0.025	±1.9
	+20°C	115	732.999875 MHz	-	±1.9
	+20°C	132.5	732.999870 MHz	-0.005	±1.9
	-30°C	97.5	732.999935 MHz	+0.06	±1.9
	-30°C	115	732.999935 MHz	+0.06	±1.9
	-30°C	132.5	732.999940 MHz	+0.065	±1.9
	+50°C	97.5	733.000140 MHz	+0.265	±1.9
	+50°C	115	733.000125 MHz	+0.25	±1.9
	+50°C	132.5	733.000125 MHz	+0.25	±1.9

Figure 65. Frequency Stability

Notes:

1. Δf = Reference frequency – frequency reading.
2. Reference reading measured at 115 VAC, + 20°C.
3. Specification: spec: ± 1 ppm = ± 1.9 kHz

Frequency Stability

E.U.T Description VE LTE 700 MHz MIMO Lower Band Comprising:
 1. VE Control Unit 2. VE Access Pod

Type 1. VCU-LTE700L-12E 2. VAP-LTE700LE-EXTAN

Serial Number: 1. 00101200036 2. 00101600069

Specification: Part 27 Section 27.54

Operation Frequency (MHz)				$\Delta f(max)$ (kHz)	Spec. (kHz)
	Temp	Volt	Readings		
741.00	+20°C	97.5	740.999895 MHz	-0.01	±1.9
	+20°C	115	740.999905 MHz	-	±1.9
	+20°C	132.5	740.999875 MHz	-0.03	±1.9
	-30°C	97.5	740.999945 MHz	+0.04	±1.9
	-30°C	115	740.999945 MHz	+0.04	±1.9
	-30°C	132.5	740.999935 MHz	+0.03	±1.9
	+50°C	97.5	741.000105 MHz	+0.02	±1.9
	+50°C	115	741.000110 MHz	+0.205	±1.9
	+50°C	132.5	741.000110 MHz	+0.205	±1.9

Figure 66. Frequency Stability

Notes:

4. Δf = Reference frequency – frequency reading.
5. Reference reading measured at 115 VAC, + 20°C.
6. Specification: spec: ± 1 ppm = ± 1.9 kHz

JUDGEMENT: Passed

The E.U.T met the requirements of the FCC, Part 27, Subpart C, Section 27.54 specifications.

TEST PERSONNEL:

Tester Signature:  Date: 02.12.10

Typed/Printed Name: A. Sharabi

10.3 Test Instrumentation Used, Radiated Measurements

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
Environmental Chamber	THERMOTRON CORP	SM 32C Mini Max	25-1030	March 4, 2009	2 Years
Digital Voltage Meter	Escort	EDM1111A	10313121	November 3, 2008	2 Years
Variable Voltage Transformer	Variac Voltage Co.	-	-	N/A	N/A
Spectrum Analyzer	HP	8594E	3809U03785	March 8, 2010	1 Year

11. APPENDIX A - CORRECTION FACTORS

11.1 **Correction factors for CABLE
from EMI receiver
to test antenna
at 3 meter range.**

FREQUENCY (MHz)	CORRECTION FACTOR (dB)	FREQUENCY (MHz)	CORRECTION FACTOR (dB)
10.0	0.3	1200.0	7.3
20.0	0.6	1400.0	7.8
30.0	0.8	1600.0	8.4
40.0	0.9	1800.0	9.1
50.0	1.1	2000.0	9.9
60.0	1.2	2300.0	11.2
70.0	1.3	2600.0	12.2
80.0	1.4	2900.0	13.0
90.0	1.6		
100.0	1.7		
150.0	2.0		
200.0	2.3		
250.0	2.7		
300.0	3.1		
350.0	3.4		
400.0	3.7		
450.0	4.0		
500.0	4.3		
600.0	4.7		
700.0	5.3		
800.0	5.9		
900.0	6.3		
1000.0	6.7		

NOTES:

1. The cable type is RG-214.
2. The overall length of the cable is 27 meters.
3. The above data is located in file 27MO3MO.CBL on the disk marked "Radiated Emission Tests EMI Receiver".

**11.2 Correction factors for CABLE
from EMI receiver
to test antenna
at 3 meter range.**

FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.2
2.0	1.6
3.0	2.0
4.0	2.4
5.0	3.0
6.0	3.4
7.0	3.8
8.0	4.2
9.0	4.6
10.0	5.0
12.0	5.8

NOTES:

1. The cable type is RG-8.
2. The overall length of the cable is 10 meters.

11.3 Correction factors for

CABLE

from spectrum analyzer
to test antenna above 2.9 GHz

FREQUENCY (GHz)	CORRECTION FACTOR (dB)	FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.9	14.0	9.1
2.0	2.7	15.0	9.5
3.0	3.5	16.0	9.9
4.0	4.2	17.0	10.2
5.0	4.9	18.0	10.4
6.0	5.5	19.0	10.7
7.0	6.0	20.0	10.9
8.0	6.5	21.0	11.2
9.0	7.0	22.0	11.6
10.0	7.5	23.0	11.9
11.0	7.9	24.0	12.3
12.0	8.3	25.0	12.6
13.0	8.7	26.0	13.0

NOTES:

1. The cable type is SUCOFLEX 104 E manufactured by SUHNER.
2. The cable is used for measurements above 2.9 GHz.
3. The overall length of the cable is 10 meters.

11.4 Correction factors for

LOG PERIODIC ANTENNA

Type SAS-200/511
at 3 meter range.

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
1.0	24.9
1.5	27.8
2.0	29.9
2.5	31.2
3.0	32.8
3.5	33.6
4.0	34.3
4.5	35.2
5.0	36.2
5.5	36.7
6.0	37.2
6.5	38.1

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
7.0	38.6
7.5	39.2
8.0	39.9
8.5	40.4
9.0	40.8
9.5	41.1
10.0	41.7
10.5	42.4
11.0	42.5
11.5	43.1
12.0	43.4
12.5	44.4
13.0	44.6

NOTES:

1. Antenna serial number is 253.
2. The above lists are located in file number SAS3M0.ANT for a 3 meter range.
3. The files mentioned above are located on the disk marked "Antenna Factors".

11.5 Correction factors for Double-Ridged Waveguide Horn

**Model: 3115, S/N 29845
at 3 meter range.**

FREQUENCY (GHz)	ANTENNA FACTOR (dB 1/m)	ANTENN A Gain (dBi)	FREQUENCY (GHz)	ANTENNA FACTOR (dB 1/m)	ANTENNA Gain (dBi)
1.0	24.8	5.4	10.0	38.8	11.4
1.5	26.1	7.6	10.5	38.9	11.8
2.0	28.6	7.7	11.0	39.0	12.1
2.5	29.8	8.4	11.5	39.6	11.8
3.0	31.4	8.4	12.0	39.8	12.0
3.5	32.4	8.7	12.5	39.6	12.5
4.0	33.7	8.6	13.0	40.0	12.5
4.5	33.4	9.9	13.5	39.8	13.0
5.0	34.5	9.7	14.0	40.2	13.0
5.5	35.1	9.9	14.5	40.6	12.9
6.0	35.4	10.4	15.0	41.3	12.4
6.5	35.6	10.8	15.5	39.5	14.6
7.0	36.2	10.9	16.0	38.8	15.5
7.5	37.3	10.4	16.5	40.0	14.6
8.0	37.7	10.6	17.0	41.4	13.4
8.5	38.3	10.5	17.5	44.8	10.3
9.0	38.5	10.8	18.0	47.2	8.1
9.5	38.7	11.1			