



Test Report

Product Name : RF Remote Control

Model No. : M9710T

FCC ID. : OLJM9710

Applicant : Ming Jong Technologies Co., Ltd.

Address : 8F, No. 1, Lane 16, Sze Chuan Road, Panchiao City,
Taipei Hsien, Taiwan, R.O.C.

Date of Receipt : Aug. 09, 2001

Date of Test : Aug. 12, 2001

Report No. : 018L018FI

The Test Results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of QuieTek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Test Report Certification

Test Date : Aug. 12, 2001
Report No. : 018L018FI



Accredited by NIST (NVLAP)
NVLAP Lab Code: 200347-0

Product Name : RF Remote Control
Applicant : Ming Jong Technologies Co., Ltd.
Address : 8F, No. 1, Lane 16, Sze Chuan Road, Panchiao
City, Taipei Hsien, Taiwan, R.O.C.
Manufacturer : Ming Jong Technologies Co., Ltd.
Model No. : M9710T
FCC ID. : OLJM9710
Rated Voltage : DC 12V
Trade Name : MING JONG
Measurement Standard : FCC Part 15 Intentional Radiators for Subpart C
Paragraph 15.231
Measurement Procedure : ANSI C63.4:1992
Test Result : Complied

The Test Results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of QuieTek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Documented By : ChiaLin Chen
(ChiaLin Chen)

Tested By : W.R
(Wallace Pan)

Approved By : Gene Chang
(Gene Chang)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION.....	4
1.1. EUT Description.....	4
1.2. Operation Description	5
1.3. Tested System Details.....	6
1.4. Configuration of tested System	6
1.5. EUT Exercise Software.....	6
1.6. Test Facility	7
2. Radiated Emission.....	8
2.1. Test Equipment.....	8
2.2. Test Setup	8
2.3. Limits.....	9
2.4. Test Procedure	10
2.5. Test Result of Radiated Emission.....	11
3. Occupied Bandwidth of Raidated Emission.....	14
3.1. Test Equipment.....	14
3.2. Test Setup	14
3.3. Test Condition	14
3.4. Limits.....	14
3.5. Test Procedure	14
3.6. Test Result of Occupied Bandwidth of Raidated Emission.....	15
4. Duty Cycle Measurement.....	16
4.1. Test Equipment.....	16
4.2. Test Setup	16
4.3. Test Condition	16
4.4. Test Proceudre	16
4.5. Test Result of Duty Cycle Measurement.....	17
5. EMI Reduction Method During Compliance Testing	18

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	RF Remote Control
Trade Name	MING JONG
FCC ID.	OLJM9710
Model No.	M9710T
EUT Voltage	DC 12V
Freq. Range of Operation	433.9MHz
Type of Modulation	AM

Note:

1. The EUT is a RF periodic Remote intend to use in household or related application.
2. These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15 Subpart C Paragraph 15.231.
3. This device is a composite device in accordance with Part 15 regulations. The function for the receiver was, measured and made a test report that the report number is 018L018F, certified under verification.

1.2. Operation Description

The EUT is a 433.9MHz transmitter intend to use in household wireless receptacle application.

The remote control signal can be transferred to receiver in 433.9MHz AM modulation.

The transmission antenna is soldered on the PCB directly.


The super generations type receiver was used. An external excitation was used when the test of receiver was performed.

1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

None

1.4. Configuration of tested System

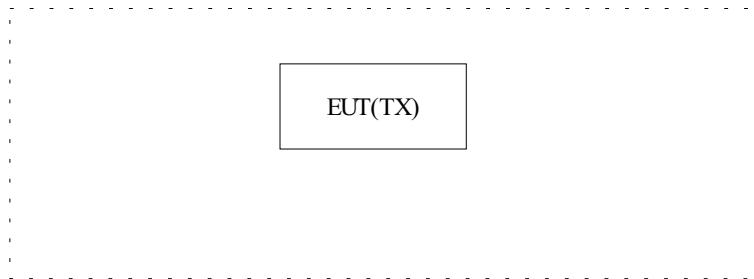

1.5. EUT Exercise Software

- (1) Setup the EUT and simulators as shown on 1.4.
- (2) Enable RF function of EUT.
- (3) EUT will work in typical condition.

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

Site Description: November 3, 1998 File on
Federal Communications Commission
FCC Engineering Laboratory
7435 Oakland Mills Road
Columbia, MD 21046
Reference 31040/SIT1300F2
September 30, 1998 Accreditation on NVLAP
NVLAP Lab Code: 92195



Site Name: Quietek Corporation

Site Address: No.5-22, Ruei-Shu Valley, Ruei-Ping Tsuen
Lin Kou Shiang, Taipei 244 Taiwan, R.O.C.

2. Radiated Emission


2.1. Test Equipment

The following test equipment are used during the radiated emission test:

Test Site	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Site # 1	X Test Receiver	R & S	ESVS 10 / 834468/003	July, 2001
	Spectrum Analyzer	Advantest	R3162/ 00803480	May, 2001
	Pre-Amplifier	Advantest	BB525C/ 3307A01812	May, 2001
Site # 2	X Bilog Antenna	SCHAFFNER	CBL6112B / 2697	Nov., 2000
	X Test Receiver	R & S	ESCS 30 / 836858/022	Nov., 2001
	Spectrum Analyzer	Advantest	3162 / 100803466	N/A
	Pre-Amplifier	Advantest	BB525C/3307A01814	N/A
	X Bilog Antenna	SCHAFFNER	CBL6112B / 2705	Oct., 2000
	X Horn Antenna	ETS	3115 / 0005-6160	July, 2001
	X Pre-Amplifier	QTK	QTK-AMP-01/ 0001	July, 2001

Note: 1. All equipments that need to calibrate are with calibration period of 1 year.
 2. Mark "X" test instruments are used to measure the final test results.

2.2. Test Setup

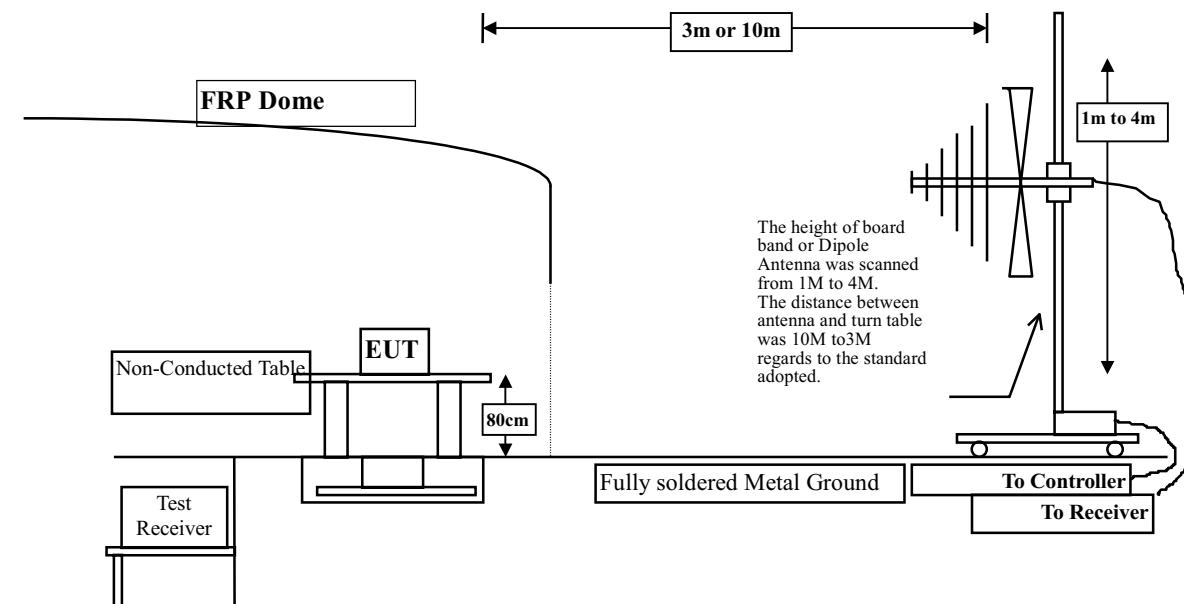

2.3. Limits

➤ FCC Part 15 Subpart C Paragraph 15.231 Limit

Fundamental Frequency MHz	Field strength of fundamental		Field Strength of spurious emissions	
	uV/m	dBuV/m	uV/m	dBuV/m
40.66-40.70	2250	67.0	225	47.0
70-130	1250	61.9	125	41.9
130-174	1250-3750 ¹	61.9 – 71.5	125-375 ¹	41.9 – 51.5
174-260	3750	71.5	375	51.5
260-470	3750-12500 ¹	71.5 – 81.9	375-1250 ¹	51.5 – 61.9
above 470	12500	81.9	1250	61.9

Remarks : 1. RF Line Voltage (dBuV) = 20 log RF Line Voltage (uV)
 2. In the Above Table, the tighter limit applies at the band edges.
 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

➤ Frequencies in restricted band are complied to limits on Paragraph15.209.

Frequency MHz	15.209 Limits (dBuV/m @3m)
30-88	40
88-216	43.5
216-960	46
Above 960	54

Remarks : 1. RF Line Voltage (dBuV) = 20 log RF Line Voltage (uV)
 2. In the Above Table, the tighter limit applies at the band edges.
 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

2.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4:1992 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter (R&S Test Receiver ESCS 30) is 120 kHz and above 1GHz is 1MHz.

The frequency range from **30MHz to 10th harmonics** is checked.

2.5. Test Result of Radiated Emission

Product : RF Remote Control
Test Item : Fundamental Radiated Emission Data
Test Site : No.1 OATS
Test Mode : Normal Operation

Freq.	Cable Loss	Probe Factor	PreAMP	Reading	Measurement	Margin	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

**Horizontal:
Fundamental Detector**

433.900	1.00	21.11	27.41	79.91	72.61	8.18	80.79
---------	------	-------	-------	-------	-------	------	-------

Average Detector

Horizontal:

PEAK= 72.61dBuV/m; Duty Cycle= 20 LOG (0.196); Average= Peak +Duty Cycle= 58.45 dBuV/m

**Vertical:
Fundamental Detector**

433.870	1.00	18.72	27.41	62.35	54.67	26.12	80.79
---------	------	-------	-------	-------	-------	-------	-------

Average Detector

Vertical:

PEAK= 54.67dBuV/m; Duty Cycle= 20 LOG (0.196); Average= Peak +Duty Cycle= 40.52 dBuV/m

Note:

1. All Readings are Quasi-Peak and Average value.
2. “ * ”, means this data is the worst emission level.
3. Measurement = Reading Level + Probe Factor + Cable loss – Preamp.
4. “- -“, means the average measurement was not performed when the peak measured data under the limit of average detection.

Product : RF Remote Control
Test Item : Harmonic Radiated Emission Data
Test Site : No.1 OATS
Test Mode : Normal Operation

Freq.	Cable Loss	Probe Factor	PreAMP Level	Reading	Measurement	Margin	Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

Horizontal:
Peak Detector

867.746	1.60	23.52	27.46	47.51	45.17	15.62	60.79
---------	------	-------	-------	-------	-------	-------	-------

Average Detector

Vertical:
Peak Detector

867.700	1.60	25.09	27.46	38.96	38.19	22.6	60.79
---------	------	-------	-------	-------	-------	------	-------

Average Detector

Note:

1. For Average Detect: Probe Factor = Antenna Factor+Duty cycle Factor. All Readings below 1GHz are Quasi-Peak, above are average value.
2. Emission Level = Reading Level + Antenna Factor + Cable loss
3. The average measurement was not performed when the peak measured data under the limit of average detection.
4. “- -”, means the average measurement was not performed when the peak measured data under the limit of average detection.

Product : RF Remote Control
 Test Item : General Radiated Emission Data
 Test Site : No.1 OATS
 Test Mode : Normal Operation

Freq. MHz	Cable Loss dB	Probe Factor dB	PreAMP Level dB	Reading		Measurement	Margin	Limit
				dBuV	dBuV/m	dB	dBuV/m	

Horizontal:

194.900	1.72	6.05	0.00	1.85	9.62	20.38	30.00
254.500	2.03	10.36	0.00	2.64	15.03	21.97	37.00
358.200	2.56	11.45	0.00	1.83	15.84	21.16	37.00
* 405.200	2.80	13.18	0.00	16.91	32.89	4.11	37.00
436.000	2.96	13.65	0.00	12.03	28.64	8.36	37.00
762.800	4.65	17.85	0.00	3.08	25.58	11.42	37.00

Vertical:

228.200	1.89	7.73	0.00	2.17	11.80	18.20	30.00
341.400	2.48	10.80	0.00	4.44	17.71	19.29	37.00
369.600	2.62	12.70	0.00	5.31	20.63	16.37	37.00
* 401.000	2.78	14.45	0.00	12.15	29.38	7.62	37.00
434.800	2.95	15.29	0.00	7.50	25.75	11.25	37.00
776.400	4.72	17.86	0.00	2.04	24.62	12.38	37.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. “*”, means this data is the worst emission level.
3. Emission Level = Reading Level + Antenna Factor + Cable loss

3. Occupied Bandwidth of Radiated Emission


3.1. Test Equipment

The following test equipments are used during the radiated emission tests:

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X Spectrum Analyzer	Advantest	R3272 / 72421194	May, 2001
X Horn Antenna	EM	EM6917 / 103325	May, 2001

Note: 1. All equipment upon which need to calibrated are with calibration period of 1 year.
2. Mark "X" test instruments are used to measure the final test results.

3.2. Test Setup

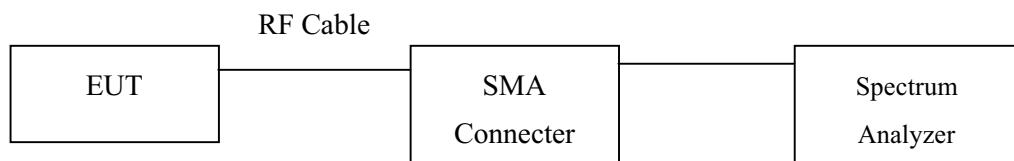

3.3. Test Condition

Standard Temperature and Humidity, Standard Test Voltage

3.4. Limits

- (1) The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70MHz and below 900MHz.
- (2) The bandwidth of the emission shall be no wider than 0.5% of the center frequency for devices operating above 900MHz.

3.5. Test Procedure


The EUT on a non-conducted table was positioned such that the distance from antenna to the EUT was 15cm.

The bandwidth of radiated emission is measured under the EUT condition produced the generated carrier signal.

3.6. Test Result of Occupied Bandwidth of Raidated Emission

Product : RF Remote Control
 Test Item : Occupied Bandwidth of Raidated Emission
 Test Site : No.1 OATS
 Test Mode : Normal Operation

Center Frequency	433	MHz
Allowable Bandwidth (70-900 MHz:0.25%, Above 900MHz: 0.5%)	1082.5	kHz
Bandwidth at 20dB down (Max)	572	kHz
Result	Complied with regulation	

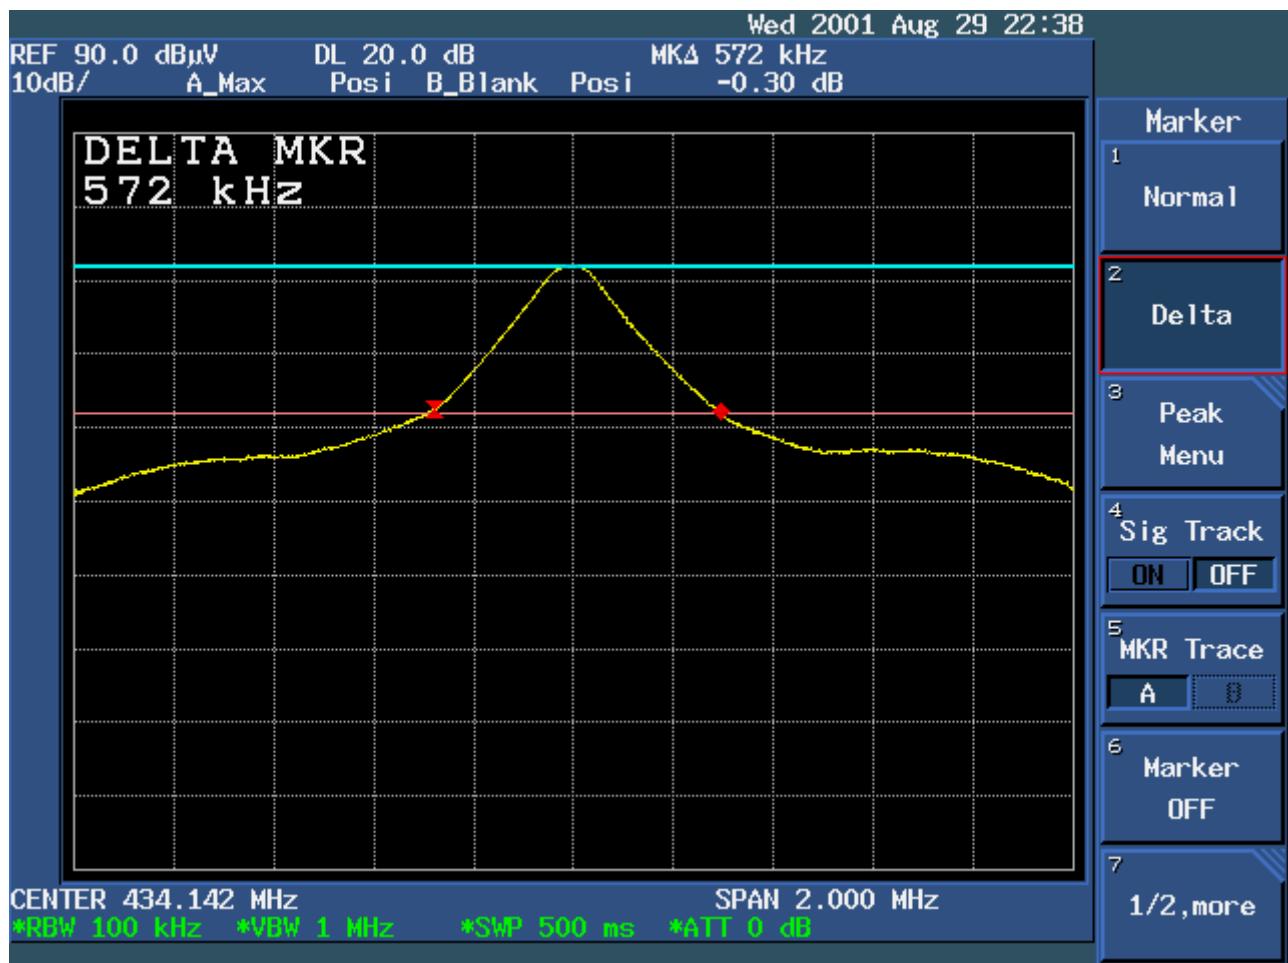

4. Duty Cycle Measurement


4.1. Test Equipment

The following test equipments are used during the radiated emission tests:

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X Spectrum Analyzer	Advantest	R3272 / 72421194	May, 2001
X Horn Antenna	EM	EM6917 / 103325	May, 2001

Note: 1. All equipment upon which need to calibrated are with calibration period of 1 year.
2. Mark "X" test instruments are used to measure the final test results.

4.2. Test Setup

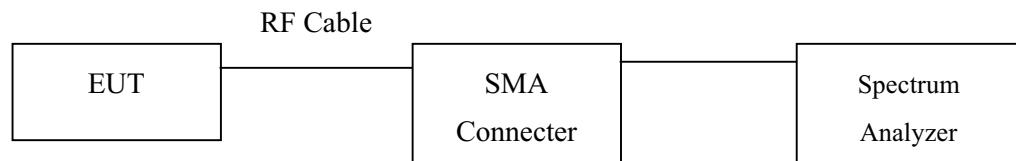

4.3. Test Condition

Standard Temperature and Humidity, Standard Test Voltage



4.4. Test Procedure

The EUT on a non-conducted table was positioned such that the distance from antenna to the EUT was 15cm.

The bandwidth of radiated emission is measured under the EUT condition produced the generated carrier signal.

4.5. Test Result of Duty Cycle Measurement

Product : RF Remote Control
 Test Item : Duty Cycle Measurement
 Test Site : No.1 OATS
 Test Mode : Normal Operation

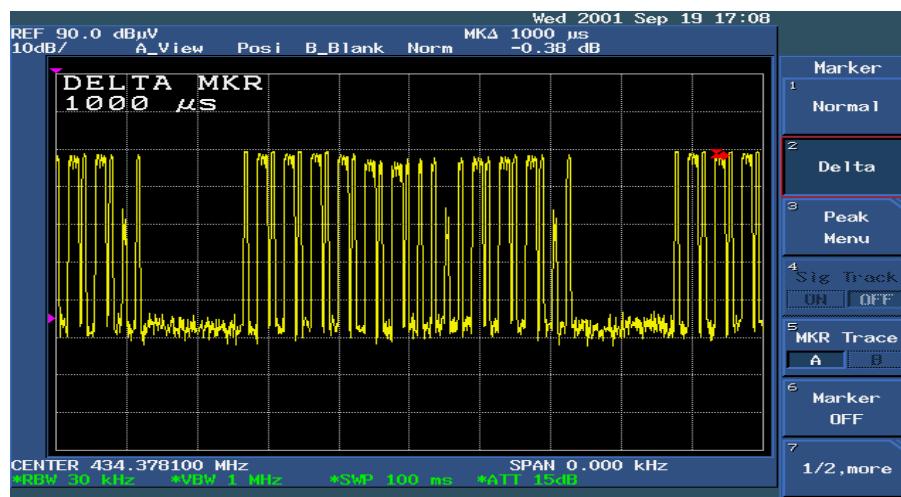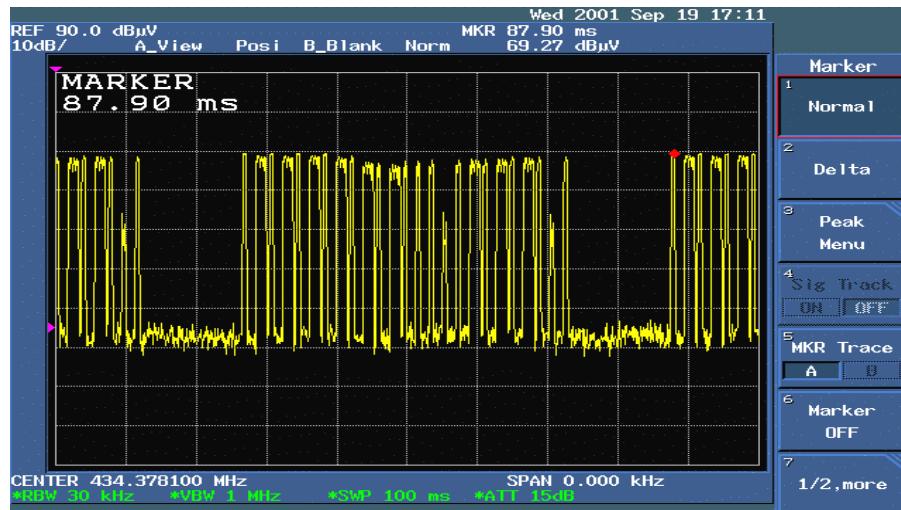

Duty Cycle:

$$22 * 0.3\text{ms} + 13 * 1\text{ms} = 19.6\text{ms}$$

$$19.6 / 100 = 0.196$$

$$20 \log 0.196 = -14.15488\text{dB}$$

$$\text{Duty Cycle} = -14.15488\text{dB}$$

5. EMI Reduction Method During Compliance Testing

No modification was made during testing.

Attachment 1 : EUT Test Photographs

Attachment 2 : EUT Detailed Photographs