
SAR Test Report

Report No.: AGCX0M120701S1

FCC ID : ONGANDROID53
PRODUCT DESIGNATION : WCDMA MOBILE PHONE
BRAND NAME : MAXWEST
MODEL NAME : ANDROID 5100
CLIENT : MAXWEST TELECOM
DATE OF ISSUE : Jul. 20,2012
STANDARD(S) : FCC Oet65 Supplement C June 2001
: IEEE Std. 1528-2003,47CFR § 2.1093
REPORT VERSION : V1.0

Attestation of Global Compliance(Shenzhen) Co., Ltd.

CAUTION: This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

Test Report Certification

Applicant Name	:	MAXWEST TELECOM
Applicant Address	:	11037 warner ave #201 fountain valley, ca, 92708 USA
Manufacturer Name	:	MAXWEST TELECOM
Manufacturer Address	:	11037 warner ave #201 fountain valley, ca, 92708 USA
Product Designation	:	WCDMA MOBILE PHONE
Brand Name	:	MAXWEST
Model Name	:	ANDROID 5100
EUT Voltage	:	DC3.7V by battery
Applicable Standard	:	FCC Oet65 Supplement C June 2001 IEEE Std. 1528-2003,47CFR § 2.1093
Test Date	:	Jul 18,2012
Test Results	:	MAX SAR MEASUREMENT(1g) Head:1.028 W/Kg Body:0.428W/Kg (2G) Head: 1.095W/Kg Body:0.341 W/Kg(Scaling SAR=1.275 W/Kg)(3G)
Performed Location	:	Attestation of Global Compliance(Shenzhen) Co., Ltd. 2 F, Building 2, No.1-No.4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang Street, Bao'an District, Shenzhen, China

Documented By

Yoyo Zhang

Yoyo Zhang

Jul. 20,2012

Checked By

Angela Li

Angela Li

Jul. 20,2012

Authorized By

Solger Zhang

Solger Zhang

Jul. 20,2012

TABLE OF CONTENTS

1. GENERAL INFORMATION	3
1.1. EUT DESCRIPTION.....	3
1.2. TEST PROCEDURE	5
1.3. TEST ENVIRONMENT.....	5
2. SAR MEASUREMENT SYSTEM	6
2.1. COMOSAR SYSTEM DESCRIPTION.....	6
2.2. COMOSAR E-FIELD PROBE	8
2.3 ROBOT	8
2.4. VIDEO POSITIONING SYSTEM	9
2.5. DEVICE HOLDER	9
2.6. SAM TWIN PHANTOM	10
3. TISSUE SIMULATING LIQUID	11
3.1. THE COMPOSITION OF THE TISSUE SIMULATING LIQUID.....	11
3.2. TISSUE CALIBRATION RESULT	11
3.3. TISSUE DIELECTRIC PARAMETERS FOR HEAD AND BODY PHANTOMS.....	12
4. SAR MEASUREMENT PROCEDURE	13
4.1. SAR SYSTEM VALIDATION.....	13
4.2. SAR MEASUREMENT PROCEDURE	15
5. SAR EXPOSURE LIMITS	16
6. TEST EQUIPMENT LIST	17
7. MEASUREMENT UNCERTAINTY	18
8. CONDUCTED POWER MEASUREMENT	19
9. TEST RESULTS	23
9.1. SAR TEST RESULTS SUMMARY	23
APPENDIX A. SAR SYSTEM VALIDATION DATA	28
APPENDIX B. SAR MEASUREMENT DATA.....	36
APPENDIX C. TEST SETUP PHOTOGRAPHS &EUT PHOTOGRAPS.....	124
APPENDIX D. PROBE CALIBRATION DATA	137
APPENDIX E. DIPOLE CALIBRATION DATA.....	146

1. General Information

1.1. EUT Description

General Information	
Product Designation	WCDMA MOBILE PHONE
Test Model	ANDROID 5100
Hardware Version	E1108_V1.3
Software Version	20120507_e1108_v73_hjy1MAXWEST
Device Category	Portable
RF Exposure Environment	Uncontrolled
Antenna Type	Internal
GSM and GPRS	
Support Band	☒ GSM 850 ☒ PCS 1900 (U.S. Bands) ☒ GSM 900 ☒ DCS 1800 (Non-U.S. Bands)
GPRS Type	Class B
GPRS Class	Class 8,10 ,12(1Tx+4Rx, 2Tx+3Rx, 3Tx+2Rx, 4Tx+1Rx)
TX Frequency Range	GSM 850 : 824.2~848.8MHz; PCS 1900: 1850.2~1909.8MHz;
RX Frequency Range	GSM 850 : 869~894MHz PCS 1900: 1930~1990MHz
Release Version	R99
Type of modulation	GMSK for GSM/GPRS
Antenna Gain	1.0dBi
Max. Output Power (Avg. Burst Power)	GSM850: 31.21dBm (32.46dBm Peak Power) PCS1900:28.36 dBm (29.47 dBm Peak Power)
Max. Output Power (Radiated)	GSM850: 30.71 dBm- ERP PCS1900: 28.64dBm- EIRP
WCDMA	
Support Band	U.S. Bands: ☒ UMTS FDD Band II ☒ UMTS FDD Band V Non-U.S. Bands: ☐ UMTS FDD Band I ☐ UMTS FDD Band III ☐ UMTS FDD Band VIII
HS Type	HSPA(HSUPA/HSDPA)

TX Frequency Range	WCDMA FDD BAND II: 1852.4 -1907.6MHz WCDMA FDD BAND V: 826.4-846.6MHz
RX Frequency Range	WCDMA FDD BAND II: 1930-1990MHz WCDMA FDD BAND V: 869-894MHz
Release Version	Rel-6
Type of modulation	QPSK
Antenna Gain	1.0dBi for GSM850 and UMTS BAND V 1.0dBi for PCS1900 and UMTS BAND II
Max. Output Power (Avg. Burst Power)	Band II: 21.31dBm (22.64dBm Peak Power) Band V: 23.26dBm (23.34dBm Peak Power)
Max. Output Power (Radiated)	Band II: 20.49dBm- ERP Band V: 21.51dBm- EIRP
Bluetooth	
Bluetooth Version	☐ V2.0 ☐ V2.1 ☒ V2.1+EDR ☐ V3.0 ☐ V3.0+EDR
Operation Frequency	2402~2480MHz
Type of modulation	☒ GFSK ☒ π/4-DQPSK ☒ 8-DPSK
Max. Output Power (Peak Conducted)	1.31dBm
Antenna Gain	0.8dBi
WIFI	
WIFI Specifi-WCDMA MOBILE PHONE	☐ 802.11a ☒ 802.11b ☒ 802.11g ☒ 802.11n(20) ☒ 802.11n(40)
Operation Frequency	2412~2462MHz
Max. Output Power	11b:10.31dBm,11g:10.57dBm,11n(20):7.21dBm,11n(40):4.41dBm
Antenna Gain	Antenna (max): 0.8dBi
Accessories	
Battery	Brand name: MAXWEST Model No. : Type: ANDROID 5100 Voltage and Capacitance: 3.7 V &1750mA
Adapter	Brand name: MAXWEST Model No. : Type: ANDROID 5100 Input: AC 100-240V~200mA 50-60Hz Output: DC 5V-1.0A
Earphone	Brand name: MAXWEST Model No. : ANDROID 5100

Note: The sample used for testing is end product.

1.2. Test Procedure

1	Setup the EUT and simulators as shown on above.
2	Turn on the power of all equipment.
3	EUT Communicate with CMU 200, and test them respectively at U.S. bands


1.3. Test Environment

Ambient conditions in the laboratory:

Items	Required	Actual
Temperature (°C)	18-25	21± 2
Humidity (%RH)	30-70	55±2

2. SAR Measurement System

2.1. COMOSAR System Description

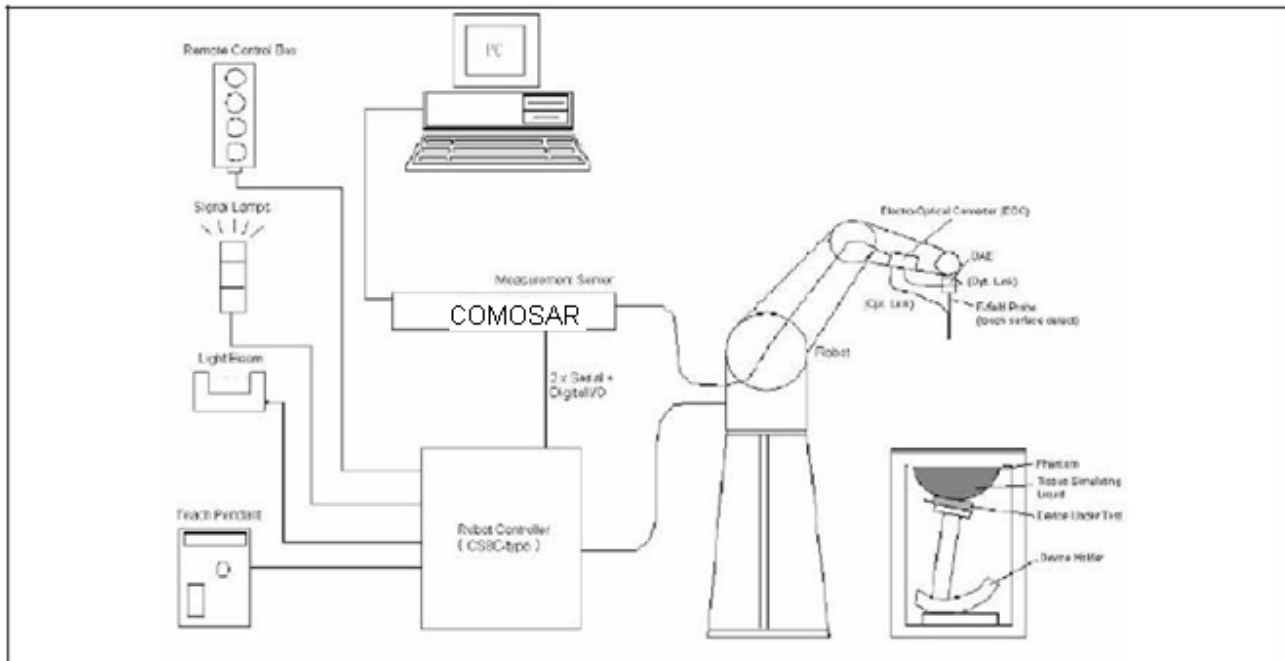

The COMOSAR system for performing compliance tests consists of the following items:

A standard high precision 6-axis robot with controller, teach pendant and software.

An arm extension for accommodating the data acquisition electronics (DAE).

A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital Communicate Mobile WCDMA MOBILE PHONE to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.

The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.

A computer running WinXP and the Opensar software.

Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.

The phantom, the device holder and other accessories according to the targeted measurement.

2.1.1. Applications

Predefined procedures and evaluations for automated compliance testing with all worldwide standards, e.g., IEEE 1528, OET 65, IEC 62209-1, IEC 62209-2, EN 50360, EN 50383 and others.

2.1.2. Area Scans

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 10mm² step integral, with 1mm interpolation used to locate the peak SAR area used for zoom scan assessments.

When an Area Scan has measured all reachable points, it computes the field maxima found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE 1528-2003, EN 50361 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan).

2.1.3. Zoom Scan (Cube Scan Averaging)

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. A density of 1000 kg/m³ is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1 g cube is 10mm, with the side length of the 10 g cube 21,5mm.

The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications utilize a physical step of 7x7x7 (5mmx5mmx5mm) providing a volume of 30mm in the X & Y axis, and 30mm in the Z axis.

2.1.4. Uncertainty of Inter-/Extrapolation and Averaging

In order to evaluate the uncertainty of the interpolation, extrapolation and averaged SAR calculation algorithms of the Post processor, COMOSAR allows the generation of measurement grids which are artificially predefined by analytically based test functions. Therefore, the grids of area scans and zoom scans can be filled with uncertainty test data, according to the SAR benchmark functions of IEEE 1528. The three analytical functions shown in equations as below are used to describe the possible range of the expected SAR distributions for the tested handsets. The field gradients are covered by the spatially flat distribution f1, the spatially steep distribution f3 and f2 accounts for H-field cancellation on the phantom/tissue surface.

$$f_1(x, y, z) = A e^{-\frac{z}{2a}} \cos^2 \left(\frac{\pi}{2} \frac{\sqrt{x'^2 + y'^2}}{5a} \right)$$

$$f_2(x, y, z) = A e^{-\frac{z}{a}} \frac{a^2}{a^2 + x'^2} \left(3 - e^{-\frac{2z}{a}} \right) \cos^2 \left(\frac{\pi}{2} \frac{y'}{3a} \right)$$

$$f_3(x, y, z) = A \frac{a^2}{\frac{a^2}{4} + x'^2 + y'^2} \left(e^{-\frac{2z}{a}} + \frac{a^2}{2(a + 2z)^2} \right)$$

2.2. COMOSAR E-Field Probe

The SAR measurement is conducted with the dissymmetric probe manufactured by SPEAG.

The probe is specially designed and calibrated for use in liquid with high permittivity. The dissymmetric probe has special calibration in liquid at different frequency.

SPEAG conducts the probe calibration in compliance with international and national standards (e.g. IEEE 1528, EN62209-1, IEC 62209, etc.) Under ISO17025. The calibration data are in Appendix D.

2.2.1. Isotropic E-Field Probe Specification

Model	SSE5	
Manufacture	Satimo	
frequency	0.3 GHz-6GHz Linearity:±0.2dB(300 MHz-6GHz)	
Dynamic Range	0.01W/Kg-100W/Kg Linearity:±0.2dB	
Dimensions	Overall length:330mm Length of individual dipoles:4.5mm Maximum external diameter:8mm Probe Tip external diameter:5mm Distance between dipoles/ probe extremity:2.7mm	
Appli-WCDMA MOBILE PHONE	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 3 GHz with precision of better 30%.	

2.3 Robot

The COMOSAR system uses the high precision robots TX90 XL type out of the newer series from Satimo SA (France).For the 6-axis controller COMOSAR system, the KUKA robot controller version from Satimo is used.

The XL robot series have many features that are important for our application:

- High precision (repeatability 0.02 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)
- 6-axis controller



2.4. Video Positioning System

The video positioning system is used in OpenSAR to check the probe. Which is composed of a camera, LED, mirror and mechanical parts. The camera is piloted by the main computer with firewire link.

During the process, the actual position of the probe tip with respect to the robot arm is measured, as well as the probe length and the horizontal probe offset. The software then corrects all movements, such that the robot coordinates are valid for the probe tip.

The repeatability of this process is better than 0.1 mm. If a position has been taught with an aligned probe, the same position will be reached with another aligned probe within 0.1 mm, even if the other probe has different dimensions. During probe rotations, the probe tip will keep its actual position.




2.5. Device Holder

The COMOSAR device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (EPR).

Thus the device needs no repositioning when changing the angles.


The COMOSAR device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon_r = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

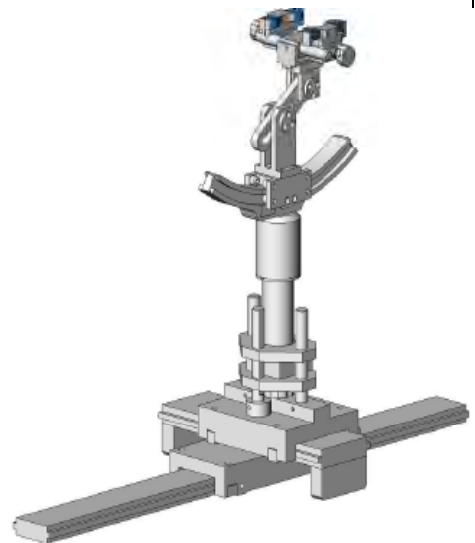

2.6. SAM Twin Phantom

The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region where shell thickness increases to 6mm). It has three measurement areas:

- Left head
- Right head
- Flat phantom

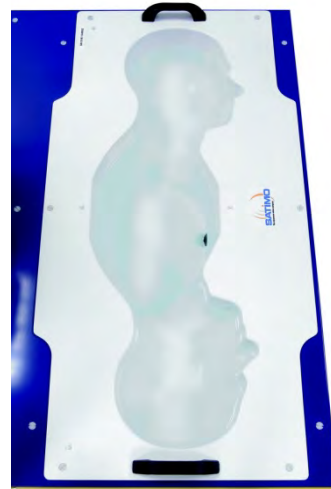

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

3. Tissue Simulating Liquid

3.1. The composition of the tissue simulating liquid

Ingredient	835MHz	835MHz	1900MHz	1900MHz
(% Weight)	Head	Body	Head	Body
Water	40.45	52.4	54.90	40.5
Salt	1.39	1.40	0.18	0.50
Sugar	57.6	45.0	0.00	58.0
HEC	0.40	1.00	0.00	0.50
Preventol	0.10	0.20	0.00	0.50
DGBE	0.00	0.00	44.92	0.00

3.2. Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using COMOSAR Dielectric Probe Kit and R&S Network Analyzer ZVL6 .

Head Tissue Stimulant Measurement				
Frequency (MHz)	Description	Dielectric Parameters		Tissue Temp [°C]
835MHz	Reference result ±5% window	ϵ_r 41.48 39.43-43.58	δ [s/m] 0.90 0.86-0.95	N/A
	Jul 18,2012	41.69	0.88	21

Body Tissue Stimulant Measurement				
Frequency (MHz)	Description	Dielectric Parameters		Tissue Temp [°C]
835MHz	Reference result ±5% window	ϵ_r 55.20 52.44-57.96	δ [s/m] 0.97 0.92-1.02	N/A
	Jul 18,2012	55.43	0.98	21

Head Tissue Stimulant Measurement				
Frequency (MHz)	Description	Dielectric Parameters		Tissue Temp [°C]
1900MHz	Reference result ±5% window	ϵ_r 40.00 38.00-42.00	δ [s/m] 1.40 1.33-1.47	N/A
	Jul 18,2012	40.07	1.39	21

Body Tissue Stimulant Measurement				
Frequency (MHz)	Description	Dielectric Parameters		Tissue Temp [°C]
1900MHz	Reference result ±5% window	ϵ_r 53.30 50.64-55.97	δ [s/m] 1.52 1.44-1.60	N/A
	Jul 18,2012	53.28	1.48	21

3.3. Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.


Target Frequency (MHz)	head		body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

(ϵ_r = relative permittivity, σ = conductivity and $\rho = 1000 \text{ kg/m}^3$)

4. SAR Measurement Procedure

4.1. SAR System Validation

4.1.1. Validation Dipoles

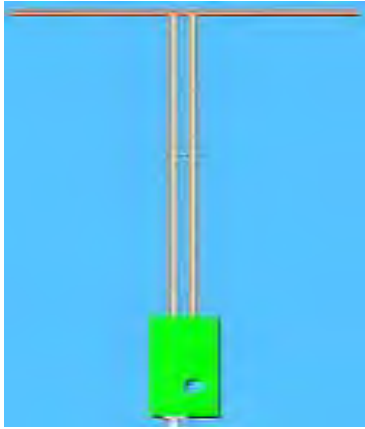

The dipoles used is based on the IEEE-1528 standard, and is complied with mechanical and electrical specifications in line with the requirements of both IEEE and FCC Supplement C. the table below provides details for the mechanical and electrical Specifications for the dipoles.

Frequency	L (mm)	h (mm)	d (mm)
900 MHz	149.0	83.3	3.6
1900MHz	68	39.5	3.6

4.1.2. Validation Result

System Performance Check at 835 MHz &1900MHz for Head				
Validation Kit: SN 46/11DIP 0G900-185				
Frequency [MHz]	Description	SAR [w/kg] 1g	SAR [w/kg] 10g	Tissue Temp.[°C]
835 MHz	Reference result ± 10% window	10.9 9.81 to 11.99	6.99 6.29 to 7.69	N/A
	Jul 18,2012	10.90	6.52	21.0
Validation Kit: SN 46/11DIP 1G1900-187				
Frequency [MHz]	Description	SAR [w/kg] 1g	SAR [w/kg] 10g	Tissue Temp.[°C]
1900 MHz	Reference result ± 10% window	39.7 35.73 to 43.67	20.5 18.45 to 22.55	N/A
	Jul 18,2012	41.40	20.95	21.0
Note: All SAR values are normalized to 1W forward power.				

4.2. SAR Measurement Procedure

The COMOSAR calculates SAR using the following equation,

$$SAR = \frac{\sigma |E|^2}{\rho}$$

σ : represents the simulated tissue conductivity

ρ : represents the tissue density

The EUT is set to transmit at the required power in line with product specification, at each frequency relating to the LOW, MID, and HIGH channel settings.

Pre-scans are made on the device to establish the location for the transmitting antenna, using a large area scan in either air or tissue simulation fluid.

The EUT is placed against the Universal Phantom where the maximum area scan dimensions are larger than the physical size of the resonating antenna. When the scan size is not large enough to cover the peak SAR distribution, it is modified by either extending the area scan size in both the X and Y directions, or the device is shifted within the predefined area.

The area scan is then run to establish the peak SAR location (interpolated resolution set at 1mm²) which is then used to orient the center of the zoom scan. The zoom scan is then executed and the 1g and 10g averages are derived from the zoom scan volume (interpolated resolution set at 1mm³).

When multiple peak SAR location were found during the same configuration or test mode, Zoom scan shall performed on each peak SAR location, only the peak point with maximum SAR value will be reported for the configuration or test mode.

5. SAR Exposure Limits

SAR assessments have been made in line with the requirements of IEEE-1528, FCC Supplement C, and comply with ANSI/IEEE C95.1-1992 “Uncontrolled Environments” limits. These limits apply to a location which is deemed as “Uncontrolled Environment” which can be described as a situation where the general public may be exposed to an RF source with no prior knowledge or control over their exposure.

Limits for General Population/Uncontrolled Exposure (W/kg)

Type Exposure	Uncontrolled Environment Limit
Spatial Peak SAR (1g cube tissue for brain or body)	1.60 W/kg

6. Test Equipment List

Equipment description	Manufacturer/Model	Identification No.	Current calibration date	Next calibration date
SAR Probe	Satimo	SN_3511_EP132	12/09/2011	12/08/2012
Phantom	Satimo	SN_4511_SAM90	Validated. No cal required.	Validated. No cal required.
Liquid	Satimo	-	Validated. No cal required.	Validated. No cal required.
Comm Tester	R&S - CMU200	069Y7-158-13-712	12/09/2011	12/08/2012
Multimeter	Keithley 2000	1188656	12/09/2011	12/08/2012
Dipole	Satimo SID900	SN46/11 DIP 0G900-185	12/09/2011	12/08/2014
Dipole	Satimo SID1900	SN46/11 DIP 1G900-187	12/09/2011	12/08/2014
Amplifier	Aethercomm	SN 046	12/09/2011	12/08/2012
Power Meter	HP E4418A	US38261498	03/30/2012	03/29/2013
Network Analyzer	Rhode & Schwarz ZVA	SN100132	02/07/2012	02/06/2013

Note: Per KDB 50824 Dipole SAR Validation Verification, AGC Lab has adopted 3 years calibration intervals. On annual basis, every measurement dipole has been evaluated and is in compliance with the following criteria:

1. There is no physical damage on the dipole;
2. System validation with specific dipole is within 10% of calibrated value;
3. Return-loss is within 20% of calibrated measurement;
4. Impedance is within 5Ω of calibrated measurement.

7. Measurement Uncertainty

Satimo Uncertainty									
Measurement uncertainty for 300 MHz to 6 GHz averaged over 1 gram / 10 gram.									
Error Description	Sec	Tol (±%)	Prob. Dist.	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g) (±%)	Std. Unc. (10g)(±%)	(Vi) Veff
Measurement System									
Probe Calibration	E.2.1	6	N	1	1	1	6	6	∞
Axial Isotropy	E.2.2	3	R		$(1-C_p)^{1/2}$	$(1-C_p)^{1/2}$	1.22474	1.22474	∞
Hemispherical Isotropy	E.2.2	5	R		$\sqrt{C_p}$	$\sqrt{C_p}$	2.04124	2.04124	∞
Boundary Effects	E.2.3	1	R		1	1	0.57735	0.57735	∞
Linearity	E.2.4	5	R		1	1	2.88675	2.88675	∞
System Detection Limits	E.2.5	1	R		1	1	0.57735	0.57735	∞
Readout Electronics	E.2.6	0.5	N	1	1	1	0.5	0.5	∞
Response Time	E.2.7	0.2	R		1	1	0.11547	0.11547	∞
Integration Time	E.2.8	2	R		1	1	1.1547	1.1547	∞
RF Ambient Noise	E.6.1	3	R		1	1	1.73205	1.73205	∞
Probe Positioner Mechanical Tolerance	E.6.2	2	R		1	1	1.1547	1.1547	∞
Probe Positioning with Respect to Phantom Shell	E.6.3	1	R		1	1	0.57735	0.57735	∞
Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	E.5.2	1.5	R		1	1	0.86603	0.86603	∞
Dipole									
Device Positioning	8.E.4.2	1	N		1	1	0.57735	0.57735	N-1
Power Drift	8.6.6.2	2	R		1	1	1.1547	1.1547	∞
Phantom and Tissue Parameters									
Phantom Uncertainty	E.3.1	4	R		1	1	2.3094	2.3094	∞
Liquid Conductivity (target)	E.3.2	5	R		0.64	0.43	1.84752	1.2413	∞
Liquid Conductivity (meas.)	E.3.3	2.5	N	1	0.64	0.43	1.6	1.075	∞
Liquid Permittivity (target)	E.3.2	3	R		0.6	0.49	1.03923	0.8487	∞
Liquid Permittivity (meas.)	E.3.3	2.5	N	1	0.6	0.49	1.5	1.225	M
Combined Standard Uncertainty			RSS				8.09272	7.9296	
Expanded Uncertainty (95%CONFIDENCE INTERVAL)			k				16.18544	15.8592	

8. Conducted Power Measurement

Mode	Frequency(MHz)	Peak Power	Avg. Burst Power(dBm)	Duty cycle Factor(dBm)	Frame Power(dBm)
Maximum Power					
GSM850	824.2	32.46	31.21	-9	22.21
	836.6	32.41	31.17	-9	22.17
	848.8	32.37	31.14	-9	22.14
GPRS850 (1 Slot)	824.2	32.43	31.13	-9	22.13
	836.6	32.39	31.09	-9	22.09
	848.8	32.36	30.07	-9	21.07
GPRS850 (2 Slot)	824.2	29.54	28.44	-6	22.44
	836.6	29.51	28.41	-6	22.41
	848.8	29.47	28.37	-6	22.37
GPRS850 (3 Slot)	824.2	27.43	26.43	-4.26	22.17
	836.6	27.39	26.41	-4.26	22.15
	848.8	27.36	26.37	-4.26	22.11
GPRS850 (4 Slot)	824.2	26.55	25.43	-3	22.43
	836.6	26.51	25.39	-3	22.39
	848.8	26.47	25.36	-3	22.36
PCS1900	1850.2	29.47	28.36	-9	19.36
	1880	29.43	28.33	-9	19.33
	1909.8	29.39	28.29	-9	19.29
GPRS1900 (1 Slot)	1850.2	29.51	28.21	-9	19.21
	1880	29.47	28.17	-9	19.17
	1909.8	29.44	28.14	-9	19.14
GPRS1900 (2 Slot)	1850.2	26.36	25.37	-6	19.37
	1880	26.32	25.34	-6	19.34
	1909.8	26.29	25.31	-6	19.31
GPRS850 (3 Slot)	1850.2	25.11	24.21	-4.26	19.95
	1880	25.07	24.18	-4.26	19.92
	1909.8	25.04	24.15	-4.26	19.89
GPRS850 (4 Slot)	1850.2	23.51	22.39	-3	19.39
	1880	23.47	22.36	-3	19.36
	1909.8	23.46	22.34	-3	19.34

Note 1:

The Frame Power (Source-based time-averaged Power) is scaled the maximum burst average power based on time slots. The calculated methods are show as following:

Frame Power = Max burst power (1 Up Slot) – 9 dB

Frame Power = Max burst power (2 Up Slot) – 6 dB

Frame Power = Max burst power (3 Up Slot) -4.26dB

Frame Power = Max burst power (4 Up Slot) – 3 dB

UMTS BAND II

Mode	Frequency (MHz)	Peak Power	Avg. Burst Power
WCDMA 1900 RMC(12.2bps)	1852.4	22.64	21.31
	1880	22.61	21.29
	1907.6	22.57	21.27
WCDMA 1900 AMR	1852.4	22.55	21.21
	1880	22.51	21.19
	1907.6	22.47	21.17
HSPA Subtest 1	1852.4	22.41	21.14
	1880	22.38	21.11
	1907.6	22.34	21.07
HSPA Subtest 2	1852.4	22.31	21.05
	1880	22.29	21.03
	1907.6	22.26	21.01
HSPA Subtest 3	1852.4	22.27	21.04
	1880	22.25	21.02
	1907.6	22.23	21.00
HSPA Subtest 4	1852.4	22.31	21.04
	1880	22.27	21.05
	1907.6	22.33	21.06
HSPA Subtest 5	1852.4	22.37	21.09
	1880	22.39	21.10
	1907.6	22.43	21.15

UMTS BAND V

Mode	Frequency (MHz)	Peak Power	Avg. Burst Power
WCDMA 850 RMC	826.4	23.34	23.26
	835.0	23.31	23.23
	846.6	23.29	23.16
WCDMA 850 AMR	826.4	23.27	23.07
	835.0	23.23	22.94
	846.6	23.19	22.89
HSPA Subtest 1	826.4	22.69	22.51
	835.0	22.66	22.47
	846.6	22.63	22.43
HSPA Subtest 2	826.4	22.61	22.37
	835.0	22.56	22.41
	846.6	22.53	22.42
HSPA Subtest 3	826.4	22.51	22.39
	835.0	22.52	22.41
	846.6	22.47	22.37
HSPA Subtest 4	826.4	22.46	22.35
	835.0	22.49	22.37
	846.6	22.48	22.36
HSPA Subtest 5	826.4	22.51	22.41
	835.0	22.54	22.44
	846.6	22.57	22.43

According to 3GPP 25.101 sub-clause 6.2.2 , the maximum output power is allowed to be reduced by following the table.

Table 6.1aA: UE maximum output power with HS-DPCCH and E-DCH

UE Transmit Channel Configuration	CM(db)	MPR(db)
For all combinations of ,DPDCH,DPCCH HS-DPDCH,E-DPDCH and E-DPCCH	$0 \leq CM \leq 3.5$	$MAX(CM-1,0)$
Note: $CM=1$ for $\beta_o/\beta_d=12/15$, $\beta_{hs}/\beta_c=24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.		

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done .However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensation for the power back-off by increasing the gain of TX_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.

9. Test Results

9.1. SAR Test Results Summary

9.1.1. Test position and configuration

Head SAR was performed with the device configured in the positions according to IEEE1528, and Body SAR was performed with the device 15mm from the phantom. Body SAR was also performed with the headset attached and without.

9.1.2. Body SAR with Headset

Testing with the headset was performed at the position and channels that resulted in the highest body SAR. This testing was performed with GPRS transmitting with 2/3/4 uplink timeslots. This operation mode represents the maximum SAR situation, when downloading data via GPRS and listening to music by headset. SAR without the headset attached was significantly higher than with the headset, and also was verified several times and confirmed, so the final test data shown were the worst case without headset. In the Body SAR test result table, body-worn means display of device down, body-front means display of device up.

9.1.3. Operation Mode

This is a multi-slot class 12 device capable of 4 uplink timeslots. During the head SAR test, the device was transmitting with maximum 1 uplink timeslot; during the body SAR test, it was transmitting with maximum 4 uplink timeslots. Additionally, this device doesn't support dual transfer mode (DTM).

9.1.4. Co-located

According to KDB 447498 and KDB 648474, due to the Max peak power for Bluetooth is 3.43dBm less than Pref and the Max peak power for Wi-Fi is less than 13.8dBm, the Maximum SAR for GSM part < 1.2W/Kg, thus, regardless the closest separation distance between the GSM antenna and Bluetooth Antenna(The distance between the GSM antenna and Bluetooth Antenna is less than 5cm;The Bluetooth and the Wi-Fi share with the same antenna), stand-alone SAR and simultaneous transmission SAR is not required.

Other reference document: KDB 941225.

SAR MEASUREMENT									
Ambient Temperature (°C) : 21 ± 2						Relative Humidity (%): 55			
Liquid Temperature (°C) : 21 ± 2						Depth of Liquid (cm):>15			
Product: WCDMA MOBILE PHONE									
Test Mode: GSM850 with GMSK modulation									
Configuration			Antenna Position	Frequency		Avg. Burst Power (dBm)	Power Drift (≤±0.2 dB)	SAR (1g) (W/kg)	Limit (W/kg)
SIM	Position	Status		channel	MHz				
<1>	Left Head	Cheek	Fixed	128	824.2	31.21	--	--	1.6
				190	836.6	31.17	-0.02	0.251	1.6
				251	848.8	31.14	--	--	1.6
		Tilted	Fixed	128	824.2	31.21	--	--	1.6
				190	836.6	31.17	-0.02	0.251	1.6
				251	848.8	31.14	--	--	1.6
	Right Head	Cheek	Fixed	128	824.2	31.21	--	--	1.6
				190	836.6	31.17	-0.10	0.321	1.6
				251	848.8	31.14	--	--	1.6
		Tilted	Fixed	128	824.2	31.21	--	--	1.6
				190	836.6	31.17	-0.03	0.244	1.6
				251	848.8	31.14	--	--	1.6

Note: when the 1-g SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. refer to KDB 941225.

1.6

Note: when the 1-g SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. refer to KDB 941225.

Ambient Temperature (°C) : 21 ± 2

Relative Humidity (%): 55

Liquid Temperature (°C) : 21 ± 2

Depth of Liquid (cm):>15

Product: WCDMA MOBILE PHONE

Test Mode: PCS1900 with GMSK modulation

Configuration			Antenna Position	Frequency		Avg. Burst Power (dBm)	Power Drift (<±0.2 dB)	SAR (1g) (W/kg)	Limit (W/kg)
SIM	Position	Status		channel	MHz				
<1>	Left Head	Cheek	Fixed	512	1850.2	28.36	--	--	1.6
				661	1880.0	28.33	-0.05	0.412	1.6
				810	1909.8	28.29	--	--	1.6
		Tilted	Fixed	512	1850.2	28.36	--	--	1.6
				661	1880.0	28.33	-0.04	0.660	1.6
				810	1909.8	28.29	--	--	1.6
	Right Head	Cheek	Fixed	512	1850.2	28.36	-0.01	0.866	1.6
				661	1880.0	28.33	-0.02	0.812	1.6
				810	1909.8	28.29	-0.04	0.660	1.6
		Tilted	Fixed	512	1850.2	28.36	0.02	1.028	1.6
				661	1880.0	28.33	0. 01	0.985	1.6
				810	1909.8	28.29	-0.03	0.747	1.6

Note: when the 1-g SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. refer to KDB 941225.

Note: when the 1-g SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. refer to KDB 941225.

Ambient Temperature (°C) : 21 ± 2

Relative Humidity (%): 55

Depth of Liquid (cm):>15

Product: WCDMA MOBILE PHONE

Test Mode: WCDMA band II with QPSK modulation

Configuration			Antenna Position	Frequency		Avg. Burst Power (dBm)	Power Drift (<±0.2 dB)	SAR (1g) (W/kg)	Limit (W/kg)
SIM	Position	Status		channel	MHz				
<2>	Left Head	Cheek	Fixed	9262	1852.4	21.31	--	--	1.6
				9400	1880	21.29	-0.05	0.531	1.6
				9538	1907.6	21.27	--	--	1.6
		Tilted	Fixed	9262	1852.4	21.31	--	--	1.6
				9400	1880	21.29	-0.03	0.620	1.6
				9538	1907.6	21.27	--		1.6
	Right Head	Cheek	Fixed	9262	1852.4	21.31	0.18	1.095	1.6
				9400	1880	21.29	0.10	0.905	1.6
				9538	1907.6	21.27	0.02	0.719	1.6
		Tilted	Fixed	9262	1852.4	21.31	0.15	0.994	1.6
				9400	1880	21.29	-0.01	0.800	1.6
				9538	1907.6	21.27	-0.04	0.603	1.6

Note: when the 1-g SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. refer to KDB 941225.

Ambient Temperature (°C) : 21 ± 2

Relative Humidity (%): 55

Depth of Liquid (cm):>15

Product: WCDMA MOBILE PHONE

Test Mode: WCDMA band II with QPSK modulation

Configuration			Antenna Position	Frequency		Avg. Burst Power (dBm)	Power Drift (<±0.2 dB)	SAR (1g) (W/kg)	Limit (W/kg)
SIM	Position	Status		channel	MHz				
<2>	Body	RMC (towards grounds)	Fixed	9262	1852.4	21.21	--	--	1.6
				9400	1880	21.19	-0.03	0.341	1.6
				9538	1907.6	21.17	--	--	1.6
		RMC (towards phantom)	Fixed	9262	1852.4	21.21	--	--	1.6
				9400	1880	21.19	-0.01	0.125	1.6
				9538	1907.6	21.17	--	--	1.6
		HSPA (towards grounds)	Fixed	9262	1852.4	21.14	--	--	1.6
				9400	1880	21.11	-0.04	0.123	1.6
				9538	1907.6	21.07	--	--	1.6
		RMC Earphone (towards grounds)	Fixed	9262	1852.4	21.21	--	--	1.6
				9400	1880	21.19	-0.02	0.168	1.6
				9538	1907.6	21.17	--	--	1.6

Note: when the 1-g SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. refer to KDB 941225.

Ambient Temperature (°C) : 21 ± 2

Relative Humidity (%): 55

Liquid Temperature (°C) : 21 ± 2

Depth of Liquid (cm):>15

Product: WCDMA MOBILE PHONE

Test Mode: WCDMA band V with QPSK modulation

Configuration			Antenna Position	Frequency		Avg. Burst Power (dBm)	Power Drift (<±0.2 dB)	SAR (1g) (W/kg)	Limit (W/kg)
SIM	Position	Status		channel	MHz				
<2>	Left Head	Cheek	Fixed	4132	826.4	23.26	--	--	1.6
				4182	835.0	23.23	-0.05	0.268	1.6
				4233	846.6	23.16	--	--	1.6
		Tilted	Fixed	4132	826.4	23.26	--	--	1.6
				4182	835.0	23.23	-0.06	0.250	1.6
				4233	846.6	23.16	--	--	1.6
	Right Head	Cheek	Fixed	4132	826.4	23.26	--	--	1.6
				4182	835.0	23.23	-0.02	0.316	1.6
				4233	846.6	23.16	--	--	1.6
		Tilted	Fixed	4132	826.4	23.26	--	--	1.6
				4182	835.0	23.23	0. 01	0.393	1.6
				4233	846.6	23.16	--	--	1.6

Note: when the 1-g SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. refer to KDB 941225.

Ambient Temperature (°C) : 21 ± 2

Relative Humidity (%): 55

Liquid Temperature (°C) : 21 ± 2

Depth of Liquid (cm):>15

Product: WCDMA MOBILE PHONE

Test Mode: WCDMA band V with QPSK modulation

Configuration			Antenna Position	Frequency		Avg. Burst Power (dBm)	Power Drift (<±0.2 dB)	SAR (1g) (W/kg)	Limit (W/kg)
SIM	Position	Status		channel	MHz				
<2>	Body	RMC (towards grounds)	Fixed	4132	826.4	23.07	--	--	1.6
				4182	835.0	22.94	-0.05	0.155	1.6
				4233	846.6	22.89	--	--	1.6
		RMC (towards phantom)	Fixed	4132	826.4	23.07	--	--	1.6
				4182	835.0	22.94	-0.09	0.115	1.6
				4233	846.6	22.89	--	--	1.6
		HSPA (towards grounds)	Fixed	4132	826.4	22.51	--	--	1.6
				4182	835.0	22.47	-0.06	0.156	1.6
				4233	846.6	22.43	--	--	1.6
		HSPA Earphone (towards ear)	Fixed	4132	826.4	23.07	--	--	1.6
				4182	835.0	22.94	-0.08	0.125	1.6
				4233	846.6	22.89	--	--	1.6

Note: when the 1-g SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. refer to KDB 941225.

Appendix A. SAR System Validation Data**Date: Jul 18,2012**

Test Laboratory: AGC Lab

System Check Head 900 MHz**DUT: Dipole 900 MHz Type: SID 900**

Communication System CW; Communication System Band: D850(850.0 MHz); Duty Cycle: 1:1; Conv.F=6.79

Frequency: 850 MHz; Medium parameters used: $f = 850$ MHz; $\sigma = 0.88$ mho/m; $\epsilon_r = 41.69$; $\rho = 1000$ kg/m³ ;


Phantom section: Flat Section ; Input Power=10dBm

Ambient temperature (°C): 21, Liquid temperature (°C): 21

Satimo Configuration:



Probe:SSE5; Calibrated: 12/09/2011

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM1; Type: SAM
- Measurement SW: OpenSAR V4_02_01

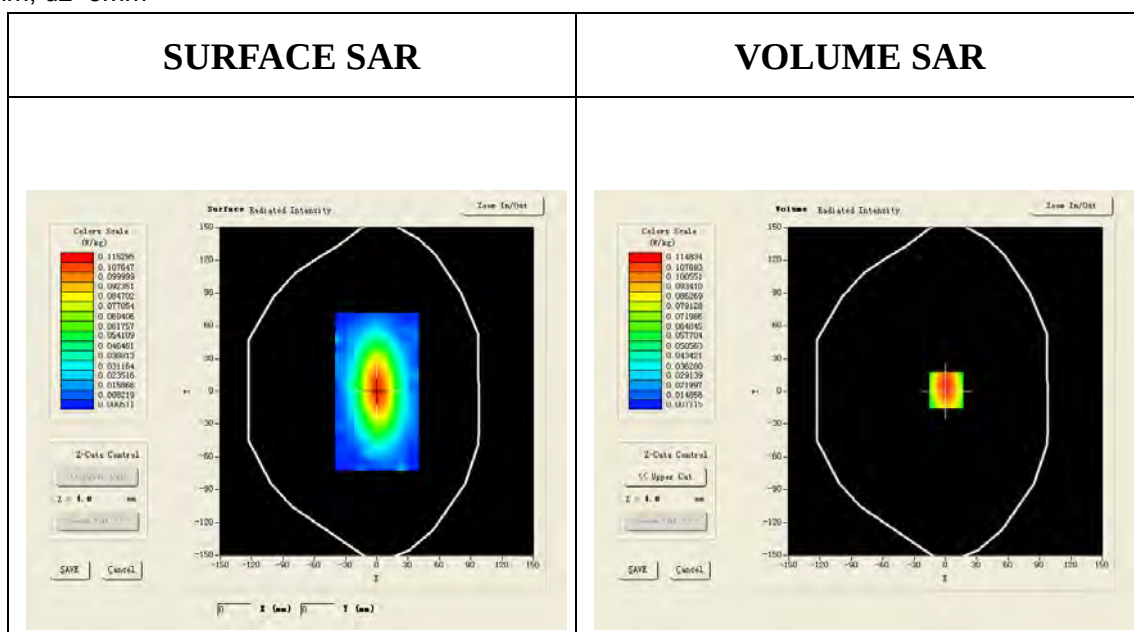Configuration/System Check GSM850 Head/Area Scan: Measurement grid: dx=8mm, dy=8mm**Configuration/System Check GSM850 Head/Zoom Scan :** Measurement grid: dx=8mm, dy=8mm, dz=5mm**Maximum location: X=1.00, Y=1.00**

SAR 10g (W/Kg)	0.065167
SAR 1g (W/Kg)	0.108969

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.1148	0.0719	0.0449	0.0282

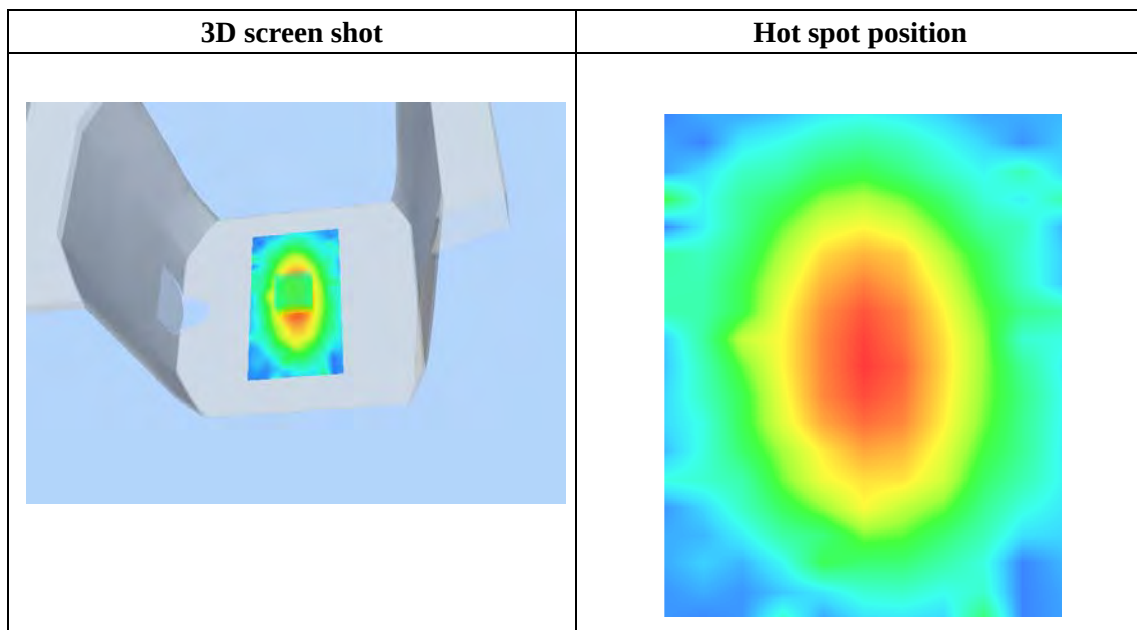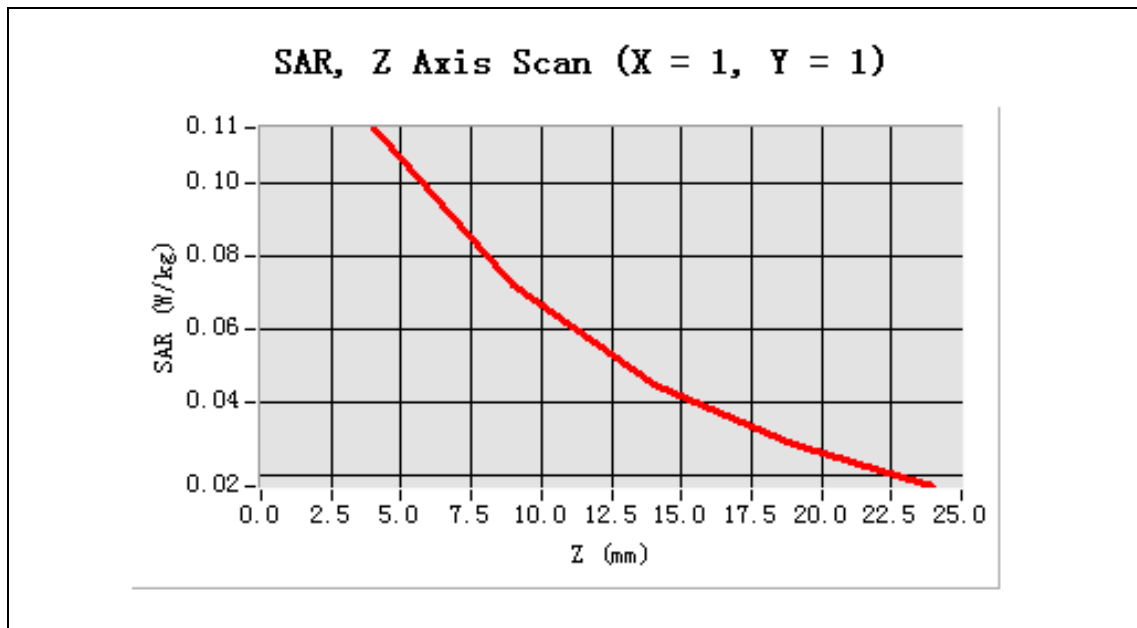

Test Laboratory: AGC Lab

Date: Jul 18,2012

System Check Head 1900MHz

DUT: Dipole 1900 MHz ; Type: SID 1900

Communication System: CW; Communication System Band: D1900 (1900.0 MHz); Duty Cycle:1:1;

Conv.F=6.42Frequency: 1900 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 40.07$; $\rho = 1000$ kg/m³ ;


Phantom section: Flat Section ; Input Power=10dBm

Ambient temperature (°C): 21, Liquid temperature (°C): 21

Satimo Configuration:



Probe:SSE5; Calibrated: 12/09/2011

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM1; Type: SAM
- Measurement SW: OpenSAR V4_02_01

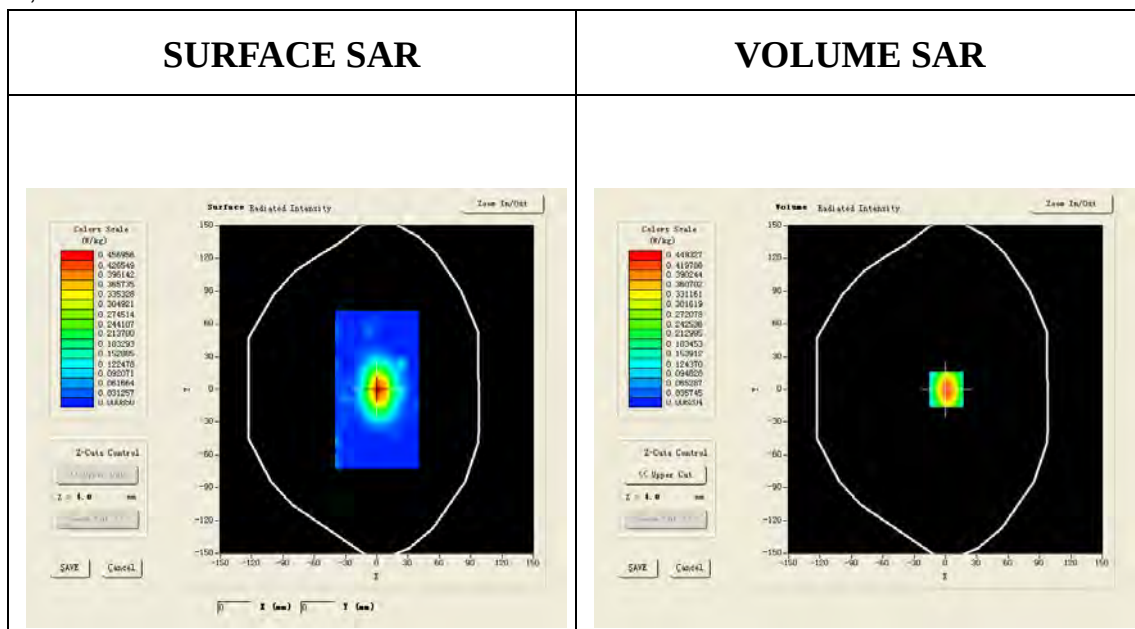Configuration/System Check PCS1900 Head/Area Scan: Measurement grid: dx=8mm,dy=8mm**Configuration/System Check PCS1900 Head/Zoom Scan:** Measurement grid: dx=8mm, dy=8mm, dz=5mm**Maximum location: X=1.00, Y=0.00**

SAR 10g (W/Kg)	0.209504
SAR 1g (W/Kg)	0.413964

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.4493	0.2484	0.1341	0.0719

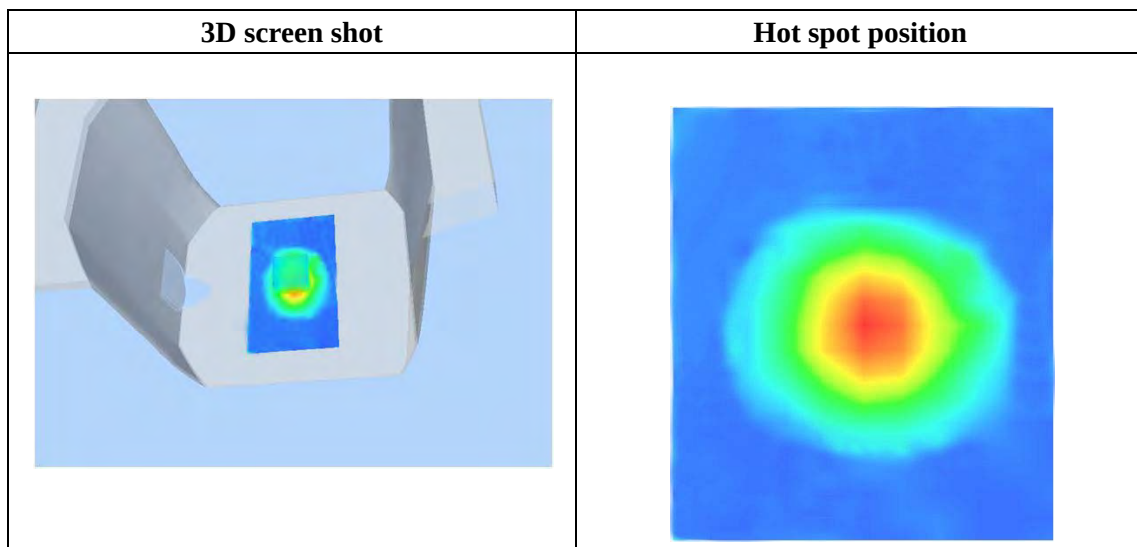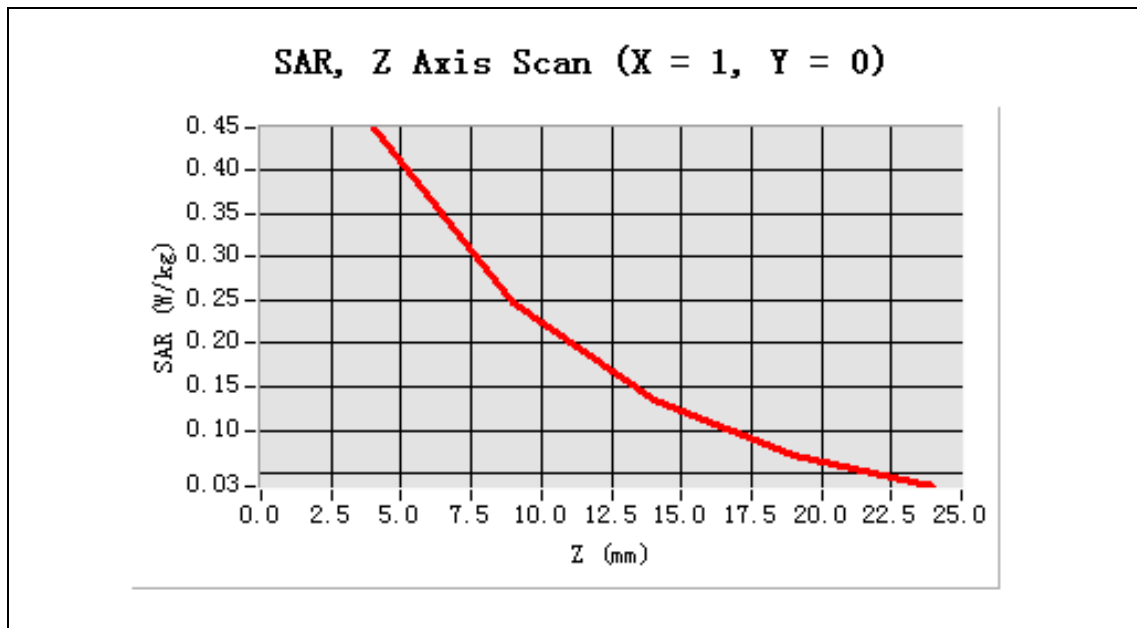

Appendix B. SAR measurement Data

Test Laboratory: AGC Lab

Date: Jul 18,2012

GSM 850 Middle-touch-Left

DUT: WCDMA MOBILE PHONE ; Type: ANDROID 5100

Communication System: Generic GSM; Communication System Band: GSM 850; Duty Cycle: 1:8.3;

Conv.F=6.79 Frequency: 836.6 MHz; Medium parameters used: $f = 835$ MHz; $\sigma = 0.88$ mho/m; $\epsilon_r = 41.69$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

Ambient temperature (°C): 21.0, Liquid temperature (°C): 21.0

Satimo Configuration:


Probe:SSE5; Calibrated: 12/09/2011

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM1; Type: SAM
- Measurement SW: OpenSAR V4_02_01

Configuration/GSM850 Mid Touch-Left/Area Scan (6x8x1): Measurement grid: dx=20mm, dy=20mm



Configuration/GSM850 Mid Touch-Left/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Left head
Device Position	Cheek
Band	GSM850
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

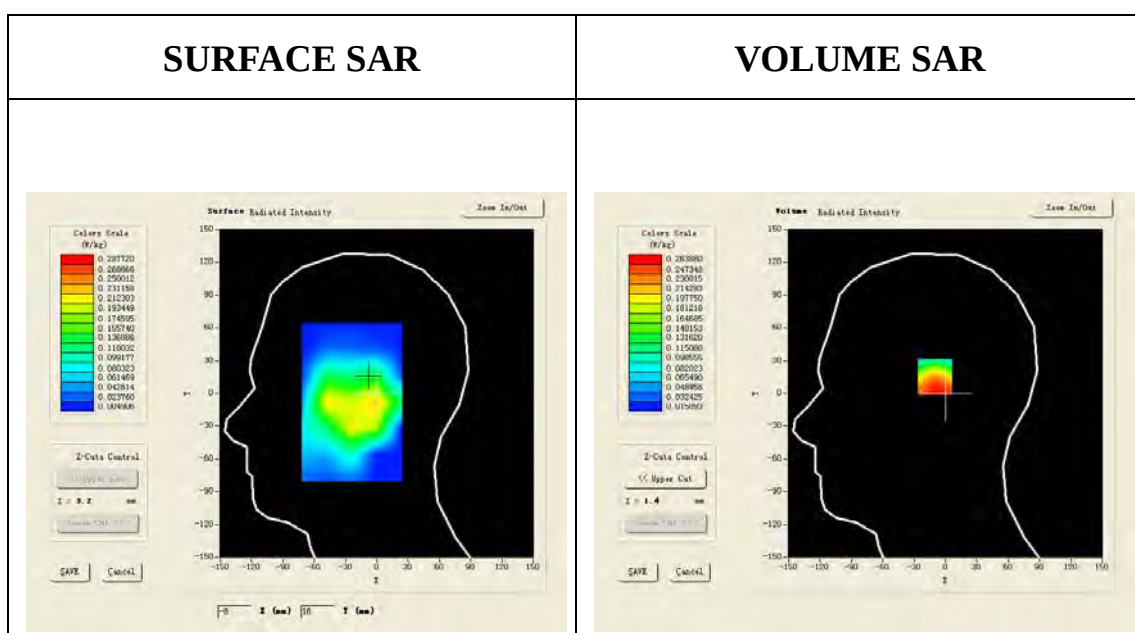

Maximum location: X=-8.00, Y=16.00

SAR 10g (W/Kg)	0.166325
SAR 1g (W/Kg)	0.251260

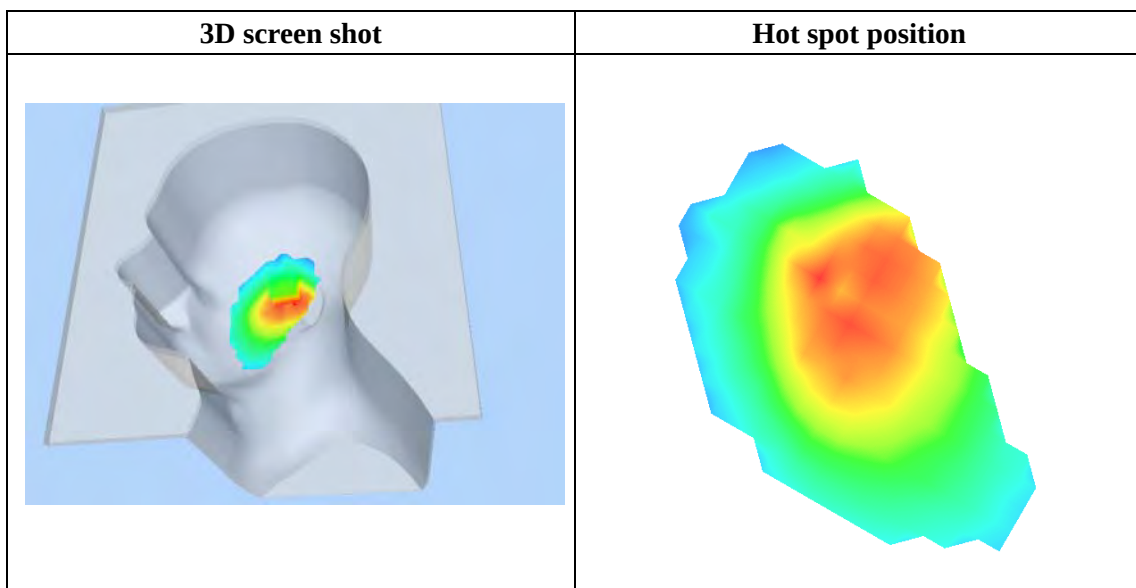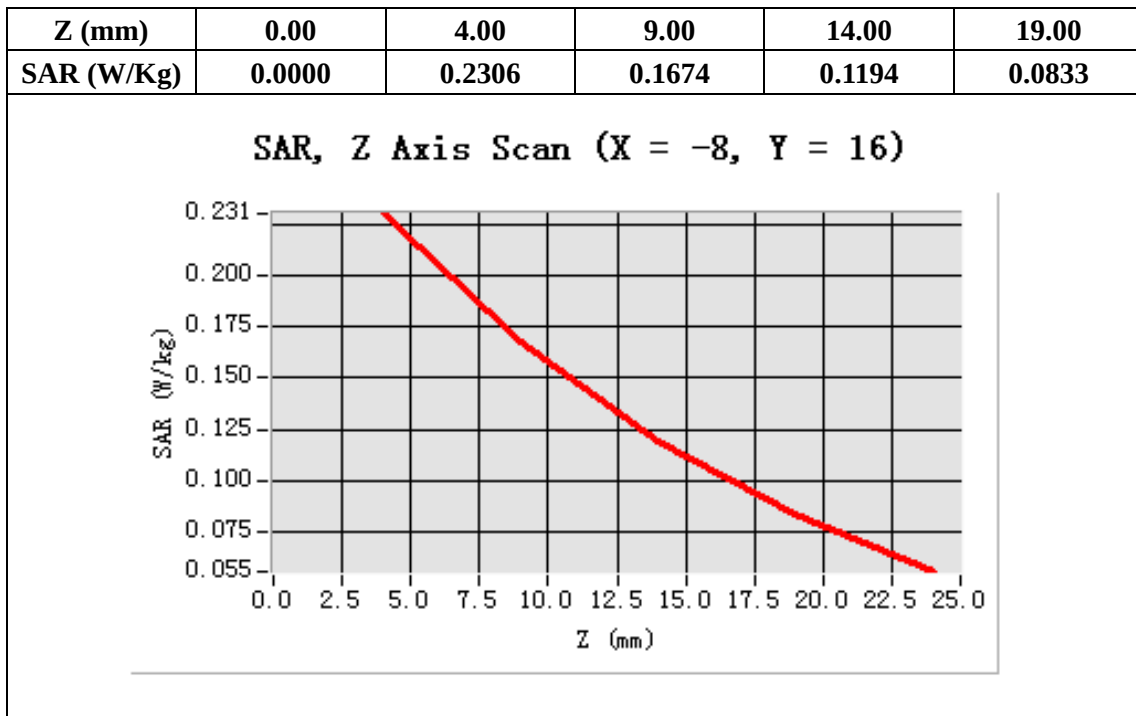

Test Laboratory: AGC Lab

Date: Jul 18,2012

GSM 850 Mid Tilt-left

DUT: WCDMA MOBILE PHONE ; Type: ANDROID 5100

Communication System: Generic GSM; Communication System Band: GSM 850; Duty

Cycle: 1:8.3; Conv.F=6.79;Frequency: 836.6 MHz; Medium parameters used: $f = 835$ MHz; $\sigma = 0.88$ mho/m; $\epsilon_r = 41.69$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

Ambient temperature (°C): 21.0, Liquid temperature(°C): 21.0

Satimo Configuration:


Probe:SSE5; Calibrated: 12/09/2011

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM1; Type: SAM
- Measurement SW: OpenSAR V4_02_01

Configuration/GSM850 Mid Tilt-Left/Area Scan (6x8x1): Measurement grid: dx=20mm, dy=20mm



Configuration/GSM850 Mid Tilt-Left/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm,dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Left head
Device Position	Tilt
Band	GSM850
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

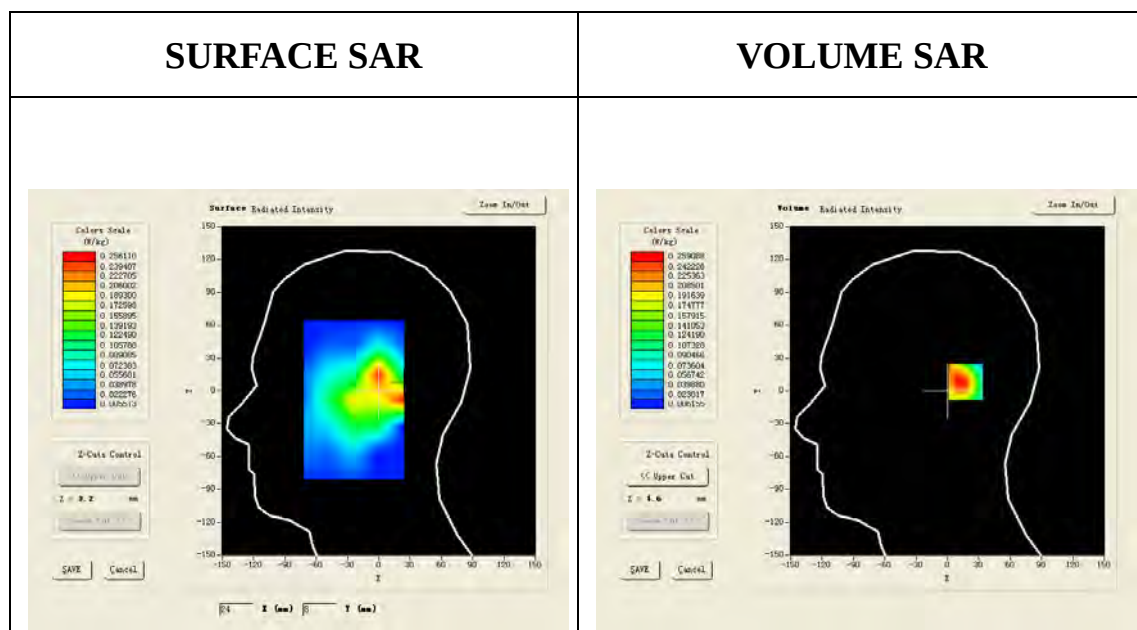

Maximum location: X=24.00, Y=8.00

SAR 10g (W/Kg)	0.143046
SAR 1g (W/Kg)	0.250749

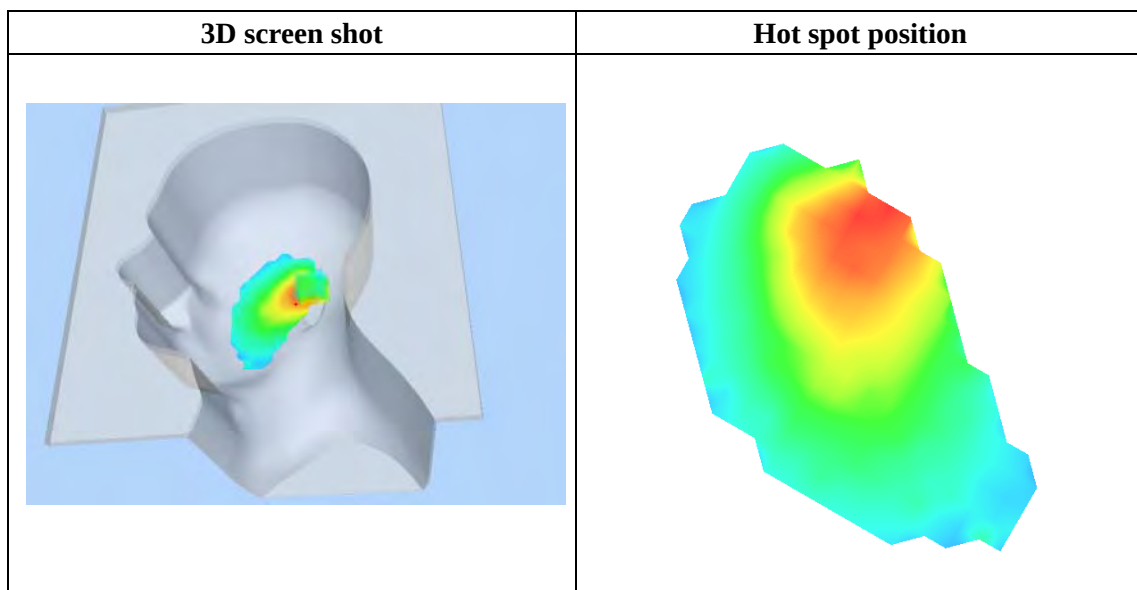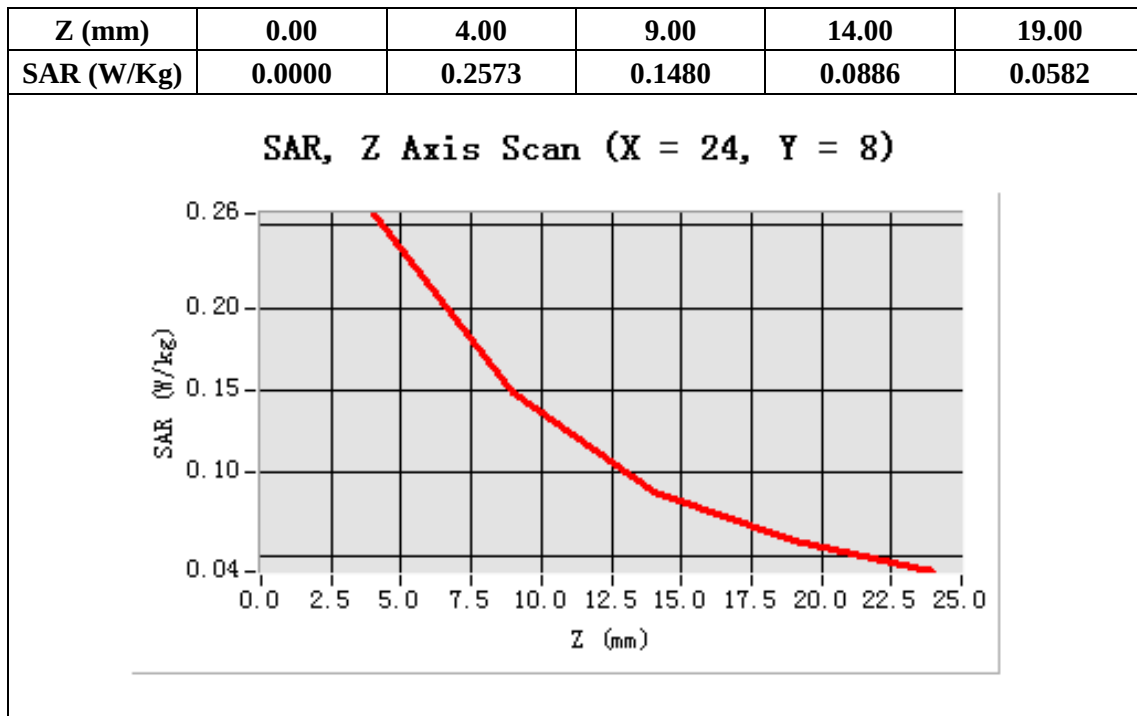

Test Laboratory: AGC Lab

Date: Jul 18,2012

GSM 850 Middle touch-Right

DUT: WCDMA MOBILE PHONE ; Type: ANDROID 5100

Communication System: Generic GSM; Communication System Band: GSM 850; Duty Cycle: 1:8.3;

Conv.F=6.79;Frequency: 836.6 MHz; Medium parameters used: $f = 835$ MHz; $\sigma = 0.88$ mho/m; $\epsilon_r = 41.69$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

Ambient temperature (°C): 21.0, Liquid temperature (°C): 21.0

Satimo Configuration:


Probe:SSE5; Calibrated: 12/09/2011

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM1; Type: SAM
- Measurement SW: OpenSAR V4_02_01

Configuration/GSM850 Mid Touch-Right/Area Scan: Measurement grid: dx=20mm, dy=20mm



Configuration/GSM850 Mid Touch-Right/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Right head
Device Position	Cheek
Band	GSM850
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

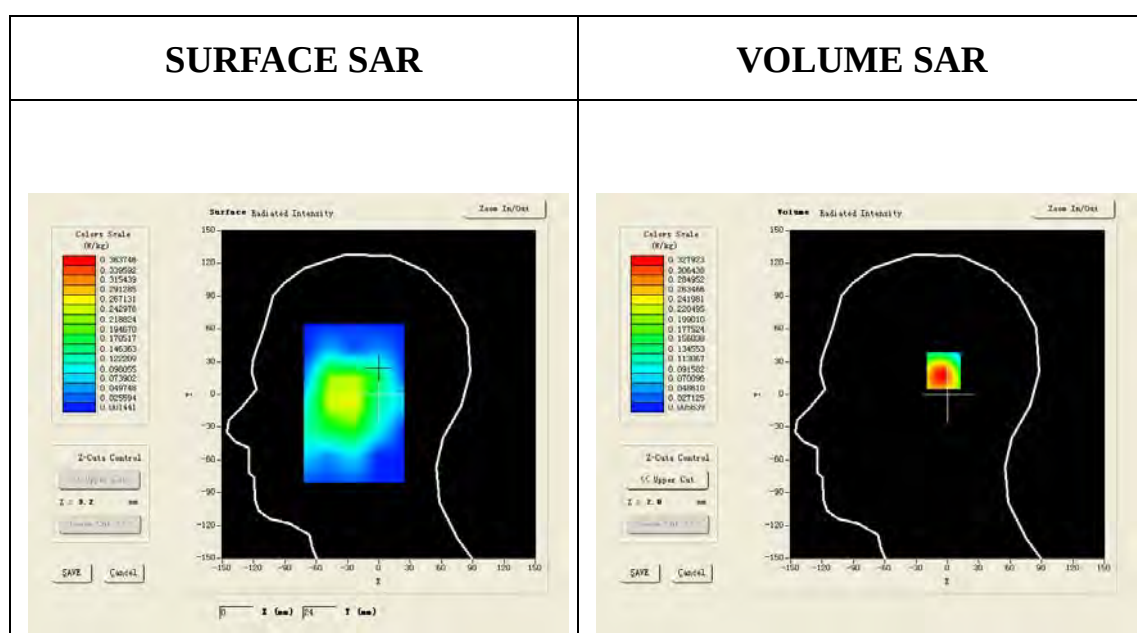

Maximum location: X=-1.00, Y=23.00

SAR 10g (W/Kg)	0.183302
SAR 1g (W/Kg)	0.320702

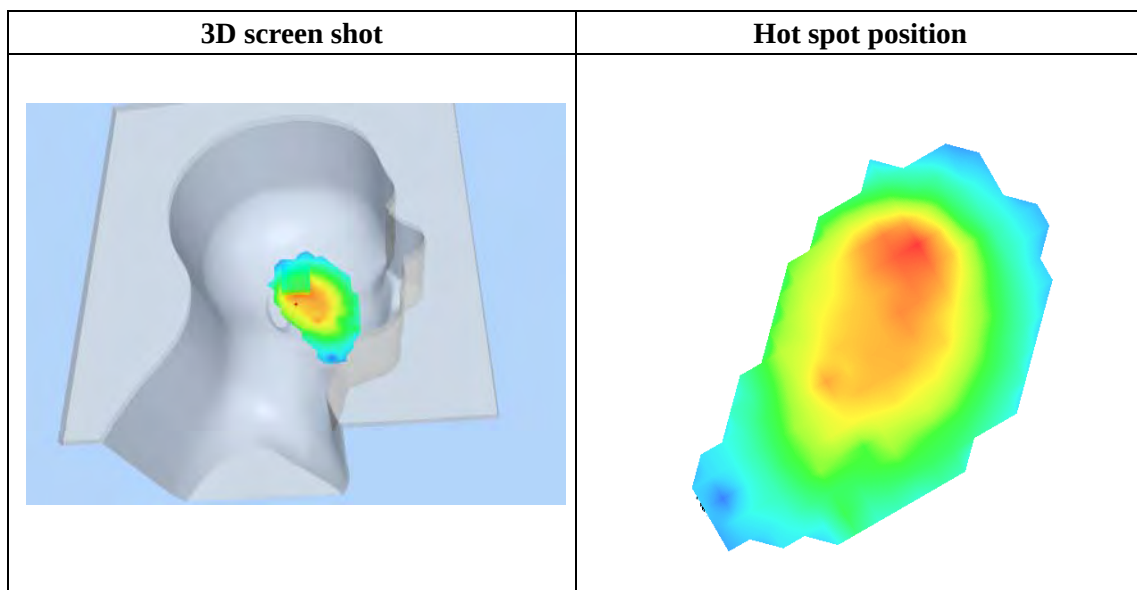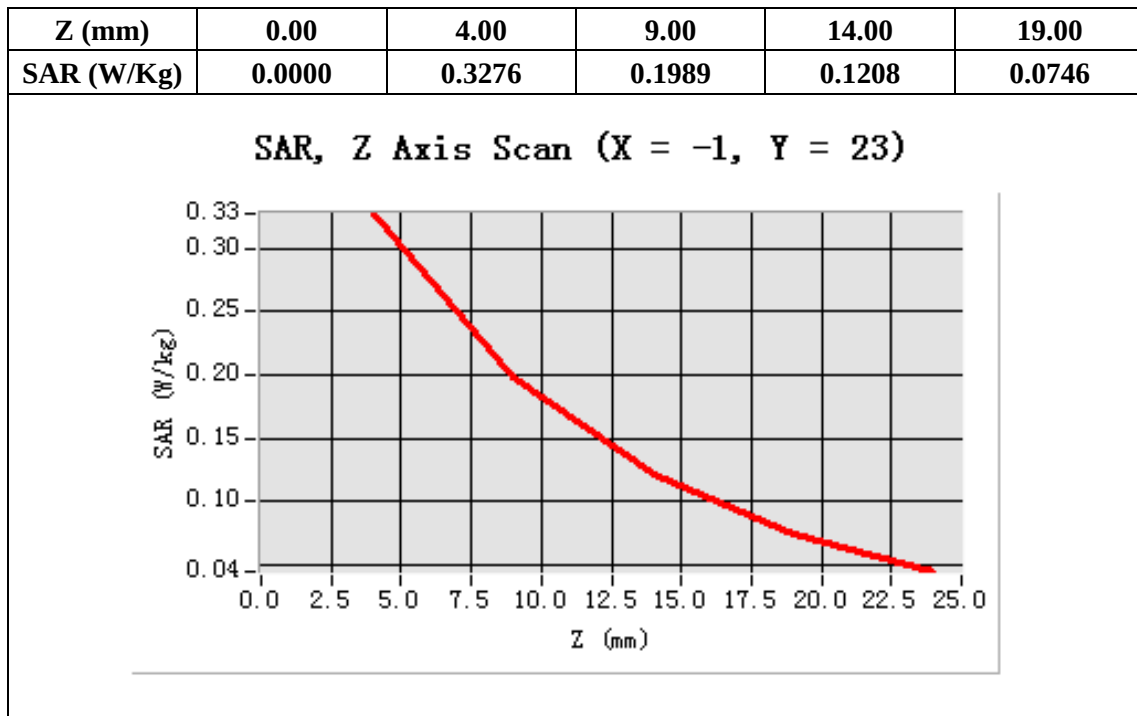

Test Laboratory: AGC Lab

Date: Jul 18,2012

GSM 850 Mid-tilt-Right

DUT: WCDMA MOBILE PHONE ; Type: ANDROID 5100

Communication System: Generic GSM; Communication System Band: GSM 850; Duty Cycle: 1:8.3;

Conv.F=6.79;Frequency: 836.6 MHz; Medium parameters used: $f = 835$ MHz; $\sigma = 0.88$ mho/m; $\epsilon_r = 41.69$;
 $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

Ambient temperature (°C): 21.0, Liquid temperature (°C): 21.0

Satimo Configuration:


Probe:SSE5; Calibrated: 12/09/2011

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM1; Type: SAM
- Measurement SW: OpenSAR V4_02_01

Configuration/GSM850 Mid Tilt-Right/Area Scan: Measurement grid: dx=20mm, dy=20mm



Configuration/GSM850 Mid Tilt-Right/Zoom Scan: Measurement grid: dx=8mm,
dy=8mm, dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Right head
Device Position	Tilt
Band	GSM850
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

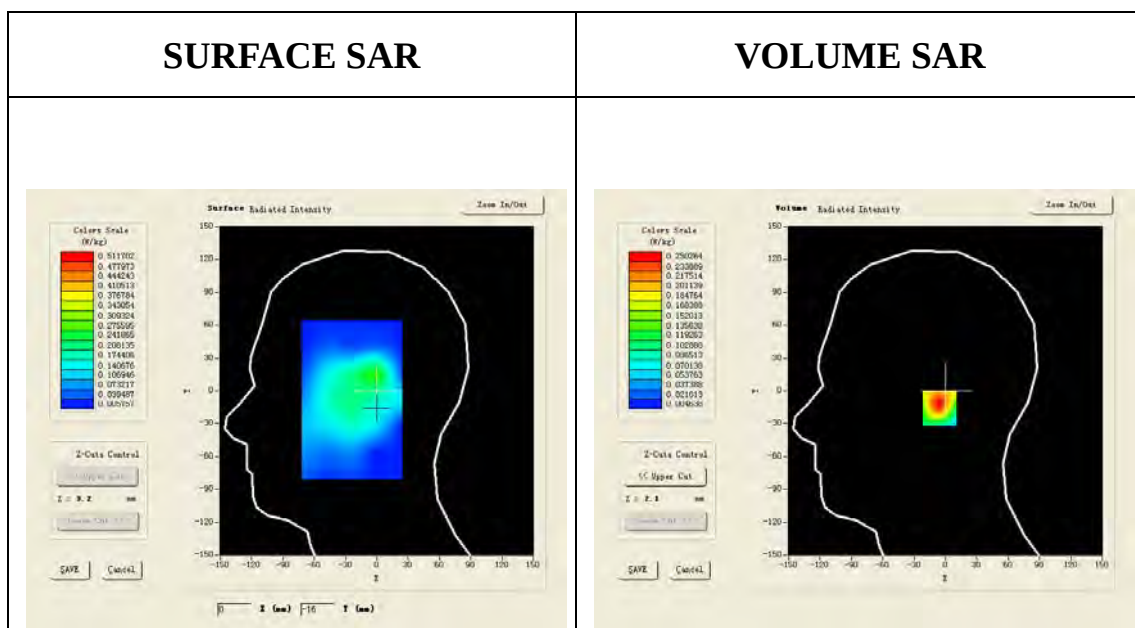

Maximum location: X=0.00, Y=-16.00

SAR 10g (W/Kg)	0.128351
SAR 1g (W/Kg)	0.244083

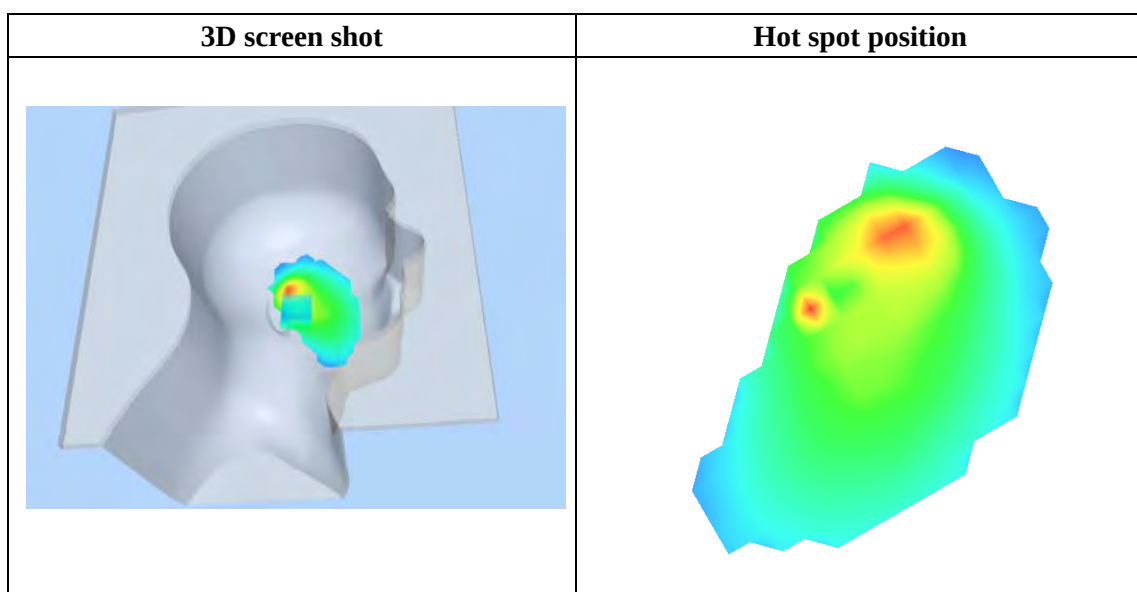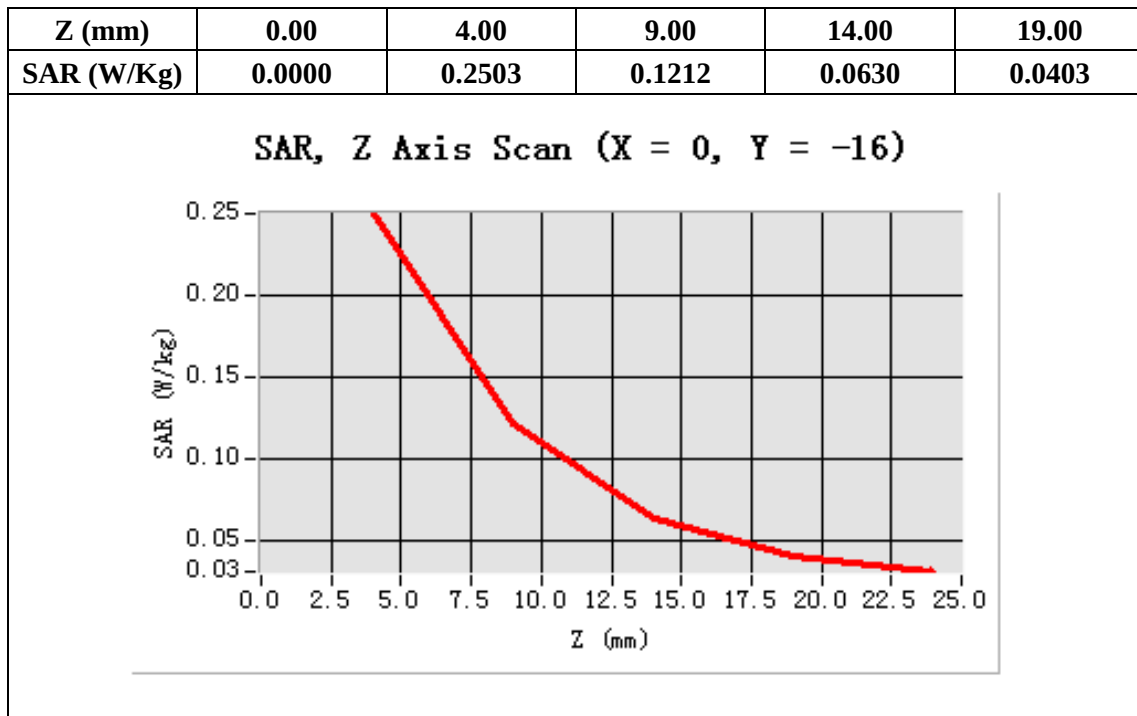

Test Laboratory: AGC Lab

Date: Jul 18,2012

GSM 850 Mid- Body-Back

DUT: WCDMA MOBILE PHONE; Type: ANDROID 5100

Communication System: Generic GSM; Communication System Band: GSM 850; Duty Cycle: 1:8.3;

Conv.F=6.79;Frequency: 836.6 MHz; Medium parameters used: $f = 835$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 55.43$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

Ambient temperature (°C): 21.0, Liquid temperature (°C): 21.0

Satimo Configuration:


Probe:SSE5; Calibrated: 12/09/2011

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM1; Type: SAM
- Measurement SW: OpenSAR V4_02_01

Configuration/GSM850 Mid Body-Back/Area Scan (6x8x1): Measurement grid: dx=20mm, dy=20mm



Configuration/GSM850 Mid Body-Back/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

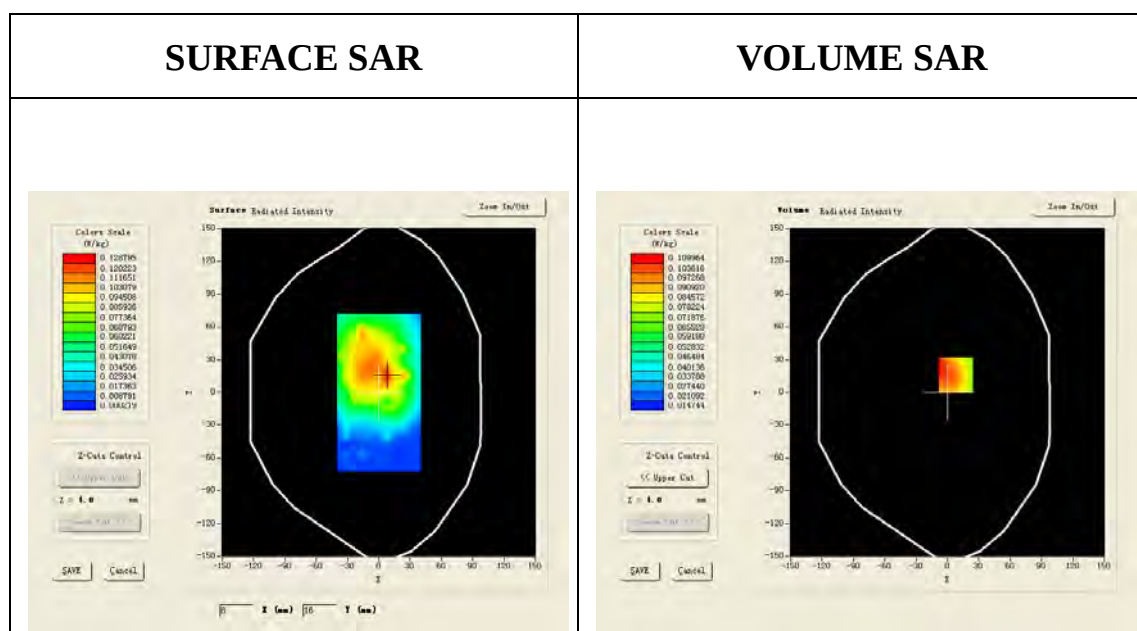

Maximum location: X=8.00, Y=16.00

SAR 10g (W/Kg)	0.074361
SAR 1g (W/Kg)	0.110385

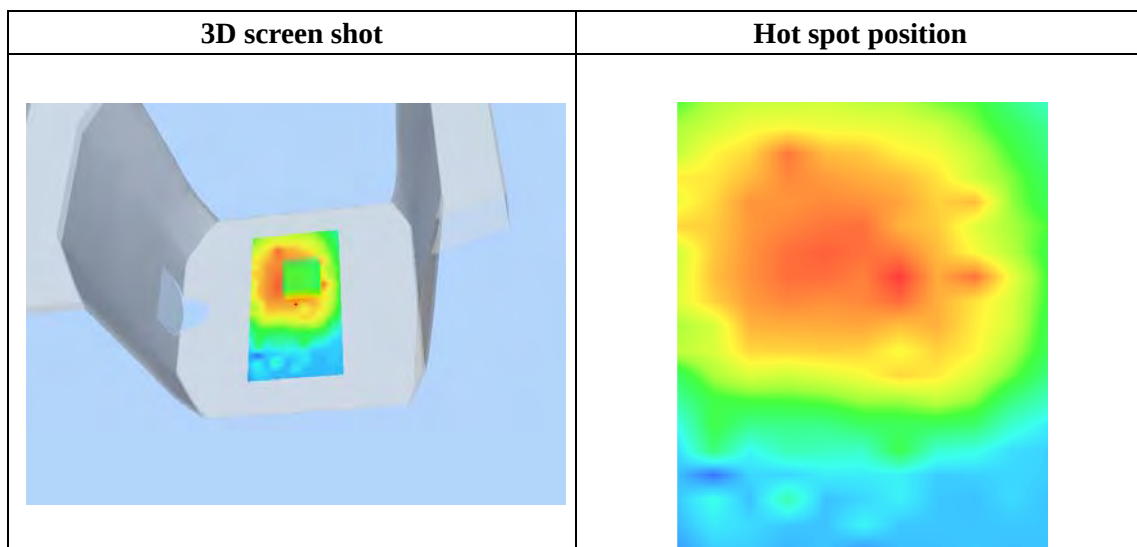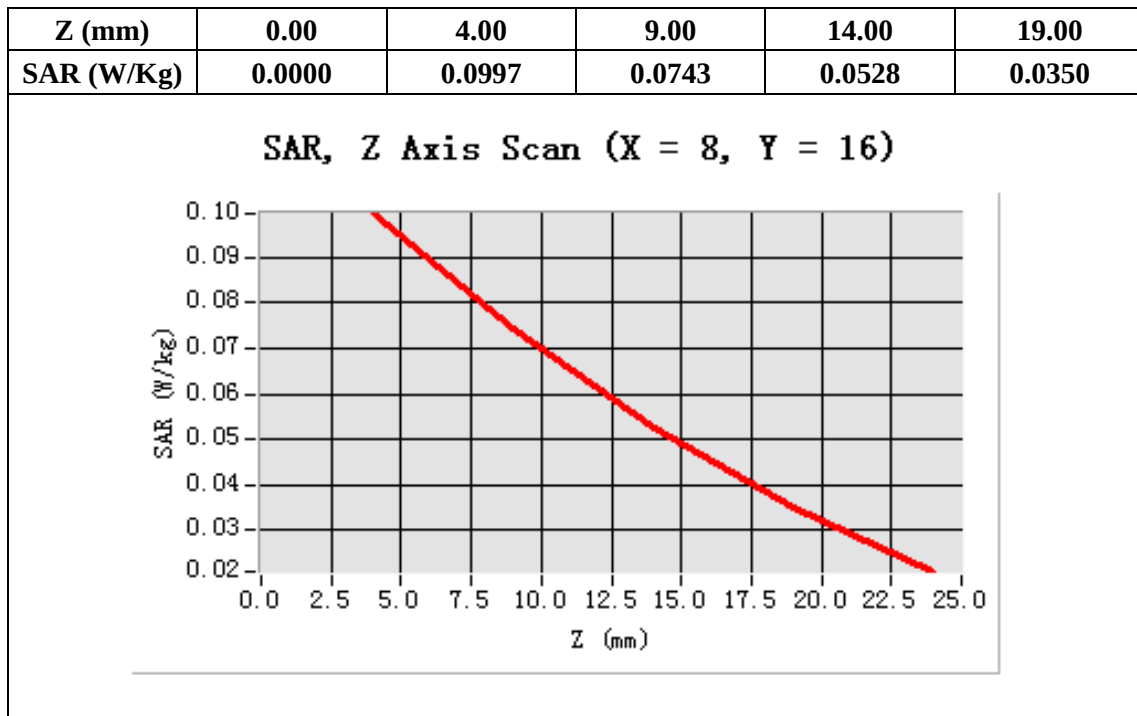

Test Laboratory: AGC Lab

Date: Jul 18,2012

GSM 850 Mid- body- Back (2up)

DUT: WCDMA MOBILE PHONE; Type: ANDROID 5100

Communication System: GPRS -2 Slot; Communication System Band: GSM850; Duty Cycle: 1:4.2 ;

Conv.F=6.79;Frequency: 836.6 MHz; Medium parameters used: $f = 835$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 55.43$; $\rho = 1000\text{kg/m}^3$;

Phantom section: Flat Section

Ambient temperature ($^{\circ}\text{C}$): 21.0, Liquid temperature ($^{\circ}\text{C}$): 21.0


Satimo Configuration:

Probe:SSE5; Calibrated: 12/09/2011

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM1; Type: SAM
- Measurement SW: OpenSAR V4_02_01



Configuration/GPRS850 Mid Body-Back/Area Scan (6x8x1): Measurement grid: dx=20mm, dy=20mm**Configuration/GPRS850 Mid Body-Back/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm;**

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	Middle
Signal	TDMA (Crest factor: 4.0)

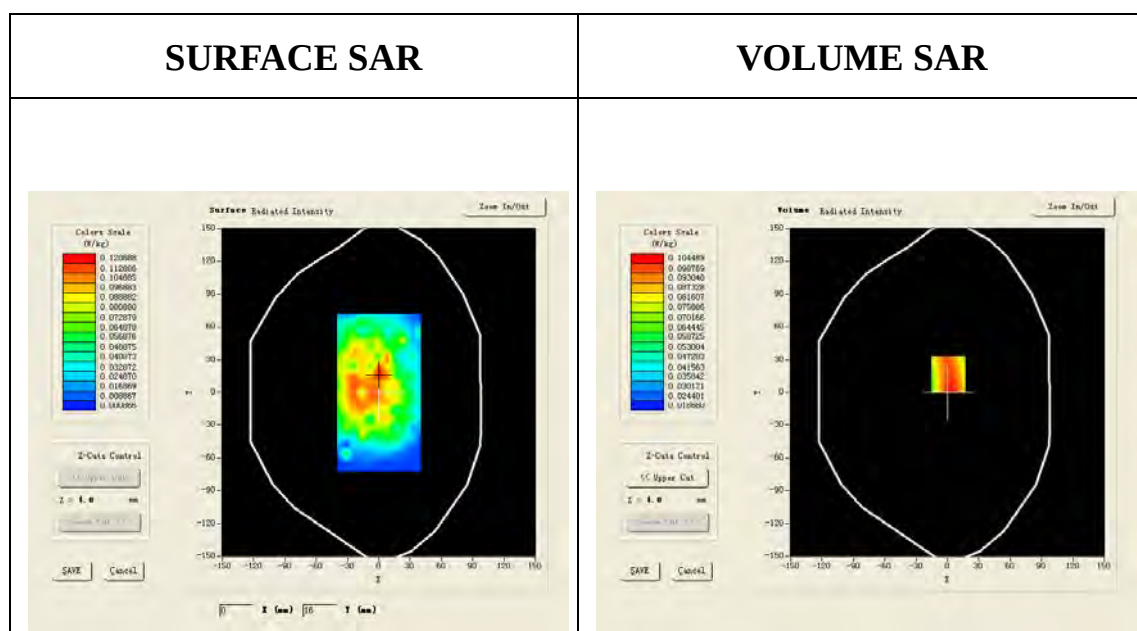

Maximum location: X=1.00, Y=17.00

SAR 10g (W/Kg)	0.078157
SAR 1g (W/Kg)	0.108895

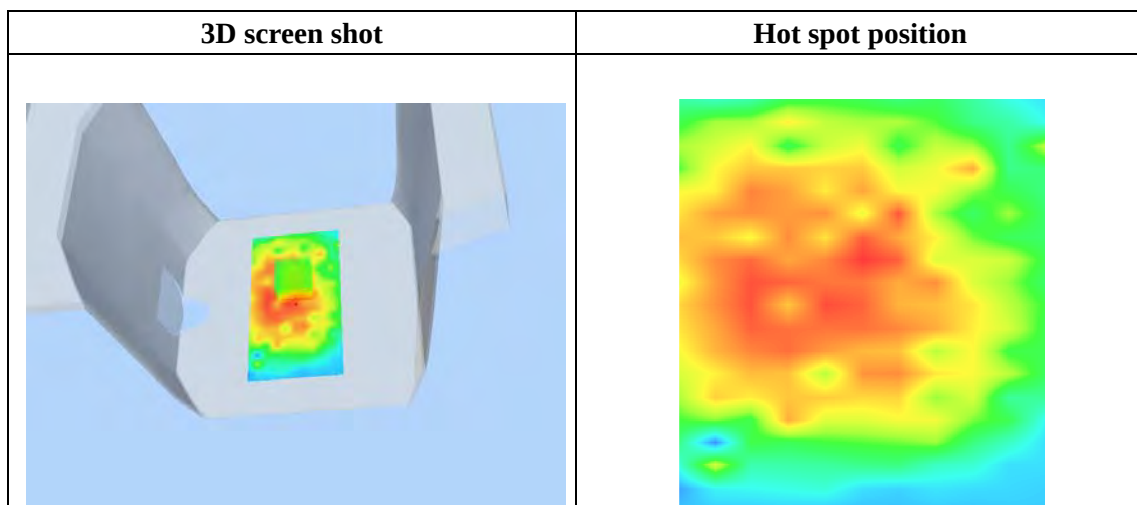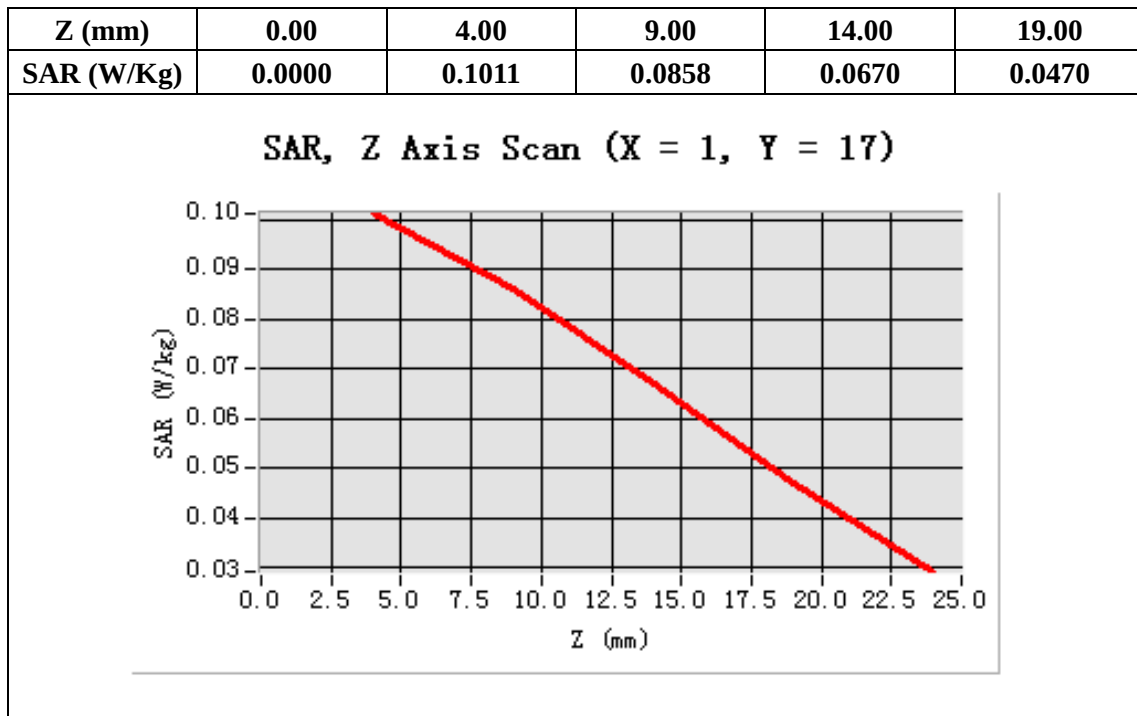

Test Laboratory: AGC Lab

Date: Jul 18,2012

GPRS 850 Mid-Body-back (3up)

DUT: WCDMA MOBILE PHONE; Type: ANDROID 5100

Communication System: GPRS -3 Slot; Communication System Band: GSM 850; Duty Cycle: 1:2.8 ;
 Conv.F=6.79;Frequency: 836.6 MHz; Medium parameters used: $f = 835$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 55.43$;
 $\rho = 1000\text{kg/m}^3$;

Phantom section: Flat Section

Ambient temperature ($^{\circ}\text{C}$): 21.0, Liquid temperature ($^{\circ}\text{C}$): 21.0


Satimo Configuration:

Probe:SSE5; Calibrated: 12/09/2011

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM1; Type: SAM
- Measurement SW: OpenSAR V4_02_01



Configuration/GPRS850 Mid Body-Back/Area Scan (6x8x1): Measurement grid: dx=20mm, dy=20mm**Configuration/GPRS850 Mid Body-Back/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm;**

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	Middle
Signal	TDMA (Crest factor:2.7)

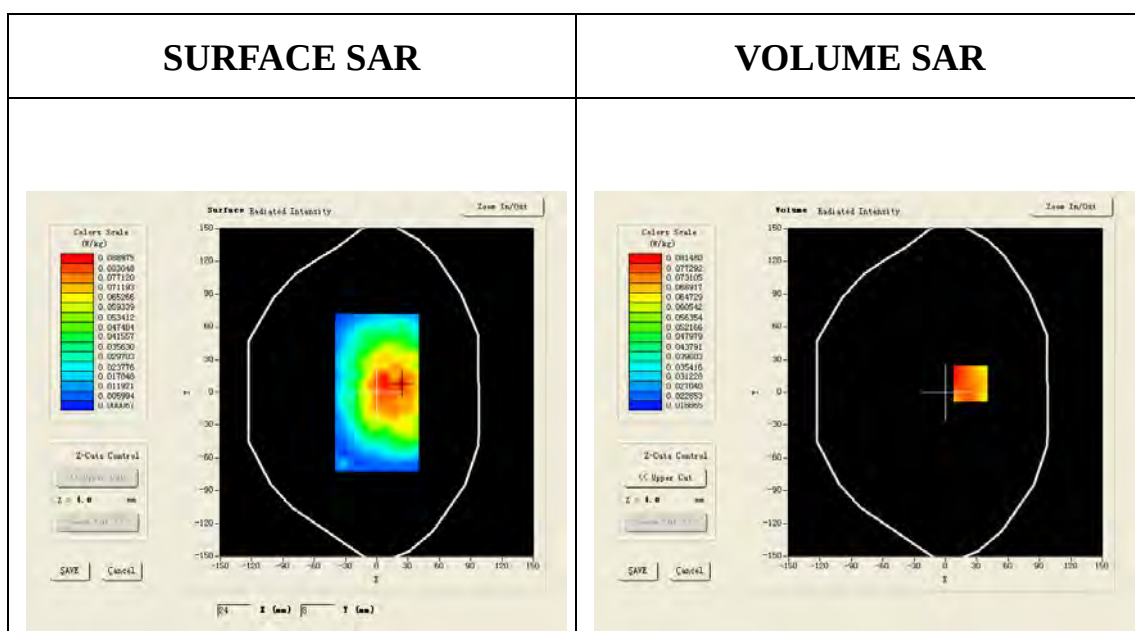

Maximum location: X=24.00, Y=8.00

SAR 10g (W/Kg)	0.060259
SAR 1g (W/Kg)	0.082509

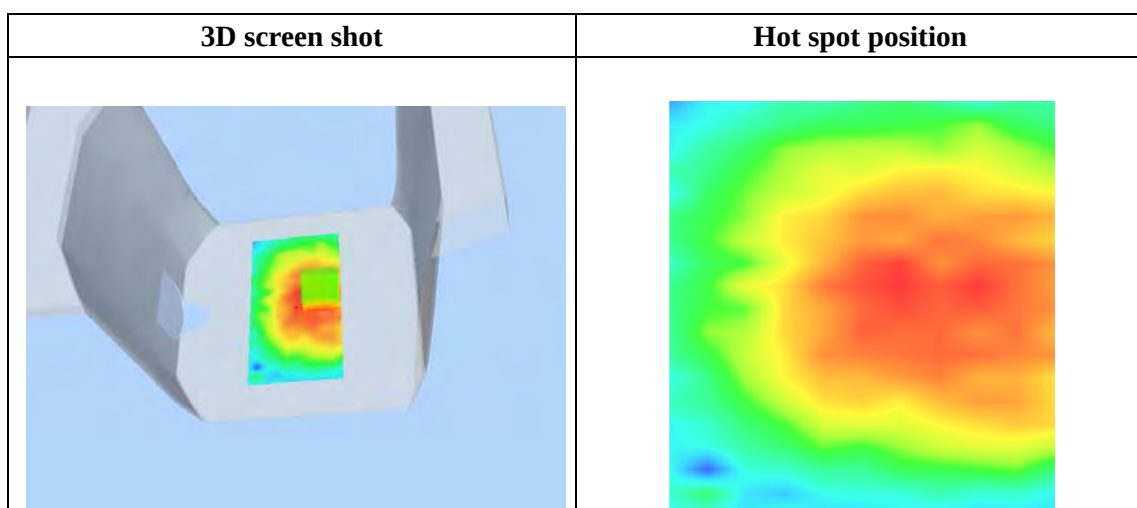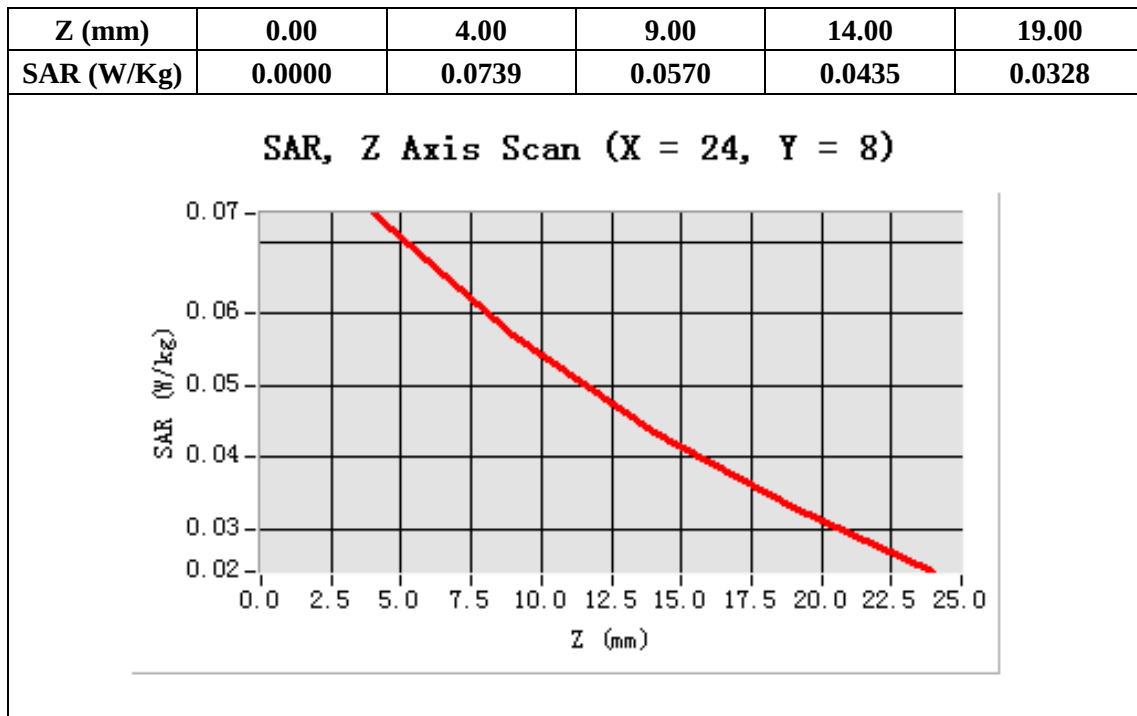

Test Laboratory: AGC Lab

Date: Jul 18,2012

GPRS 850 Mid-body-Back (4up)

DUT: WCDMA MOBILE PHONE; Type: ANDROID 5100

Communication System: GPRS -4 Slot; Communication System Band: GSM 850; Duty Cycle: 1:2.1 ;

Conv.F=6.79;Frequency: 836.6 MHz; Medium parameters used: $f = 835$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 55.43$; $\rho = 1000\text{kg/m}^3$;

Phantom section: Flat Section

Ambient temperature ($^{\circ}\text{C}$): 21.0, Liquid temperature ($^{\circ}\text{C}$): 21.0


Satimo Configuration:

Probe:SSE5; Calibrated: 12/09/2011

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM1; Type: SAM
- Measurement SW: OpenSAR V4_02_01

Configuration/GPRS850 Mid Body-Back/Area Scan: Measurement grid: $\text{dx}=20\text{mm}$, $\text{dy}=20\text{mm}$ Configuration/GPRS850 Mid Body-Back/Zoom Scan: Measurement grid: $\text{dx}=8\text{mm}$, $\text{dy}=8\text{mm}$, $\text{dz}=5\text{mm}$;

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	Middle
Signal	TDMA (Crest factor: 2.0)

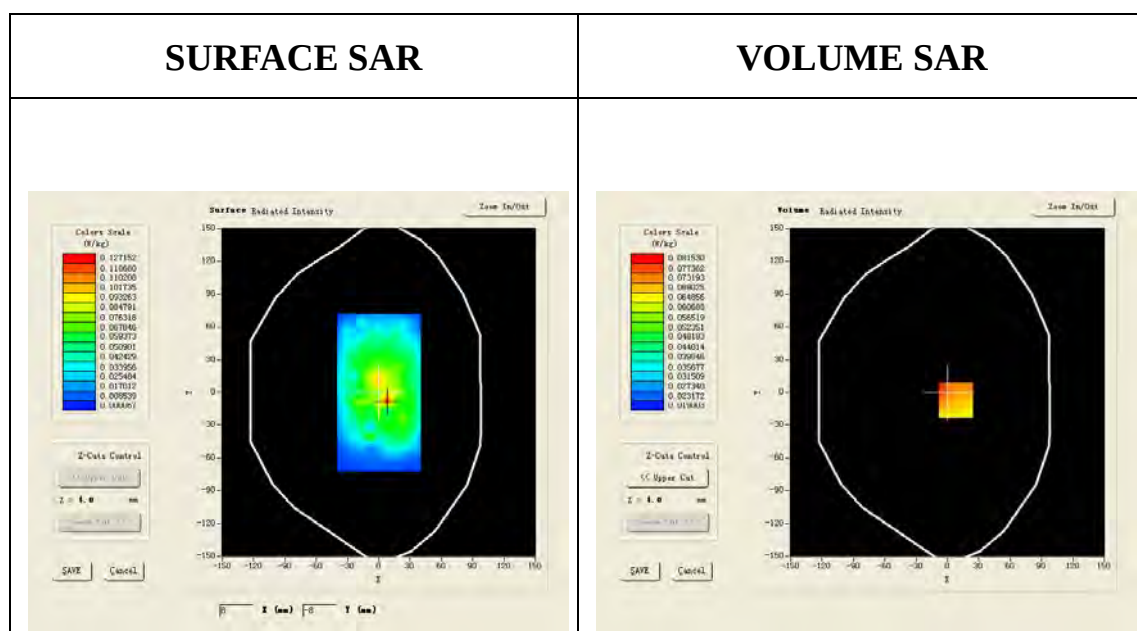




Maximum location: X=8.00, Y=-7.00

SAR 10g (W/Kg)	0.058082
SAR 1g (W/Kg)	0.080630

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.0699	0.0580	0.0450	0.0321

SAR, Z Axis Scan (X = 8, Y = -7)

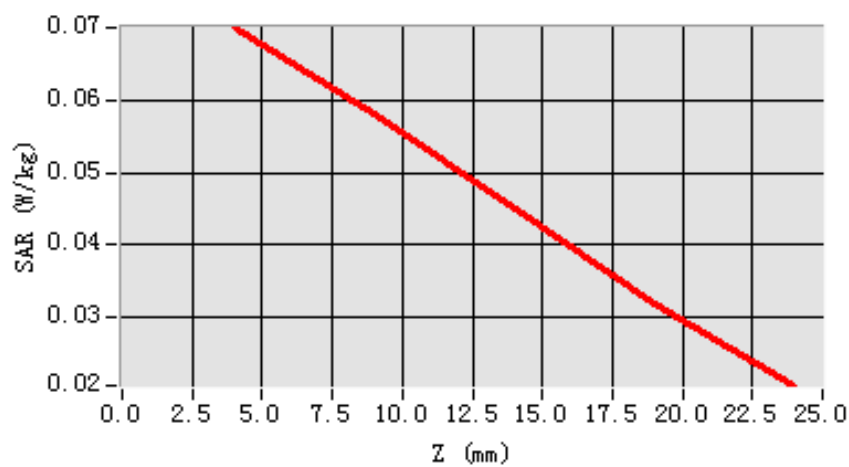

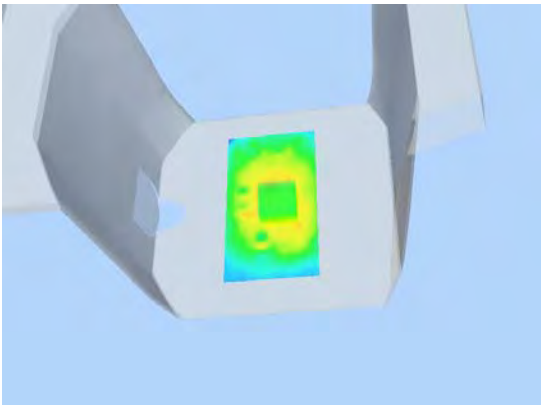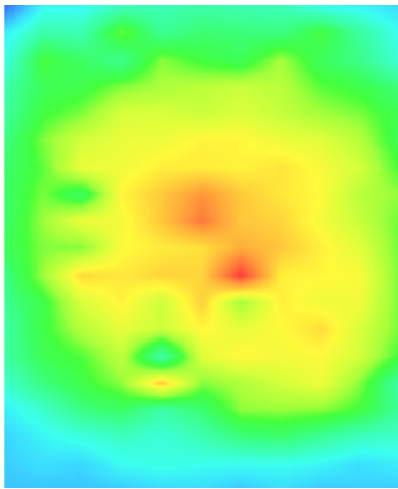3D screen shot	Hot spot position
	

Test Laboratory: AGC Lab**Date: Jul 18,2012****GSM 850 Mid- Body- Front (MS)****DUT: WCDMA MOBILE PHONE; Type: ANDROID 5100**

Communication System: Generic GSM; Communication System Band: GSM 850; Duty Cycle: 1:8.3;

Conv.F=6.79;Frequency: 836.6 MHz; Medium parameters used: $f = 835$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 55.43$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

Ambient temperature (°C): 21.0, Liquid temperature (°C): 21.0


Satimo Configuration:

Probe:SSE5; Calibrated: 12/09/2011



- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM1; Type: SAM
- Measurement SW: OpenSAR V4_02_01

Configuration/GSM850 Mid Body- Front /Area Scan (6x8x1): Measurement grid: dx=20mm, dy=20mm**Configuration/GSM850 Mid Body- Front Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm;**

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

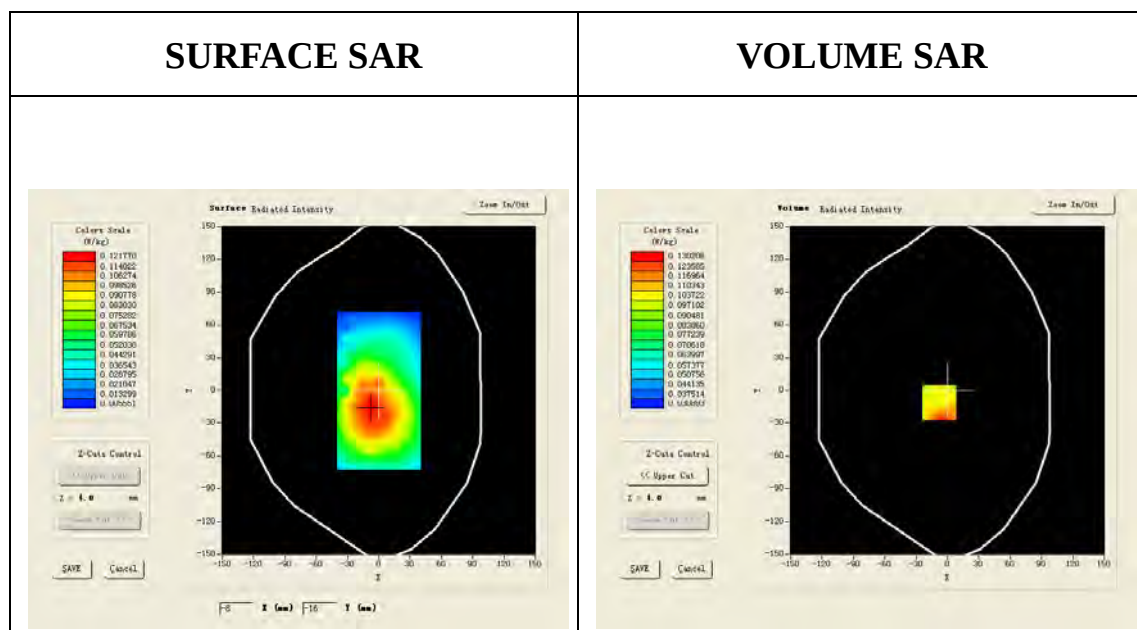**Maximum location: X=-8.00, Y=-11.00**

SAR 10g (W/Kg)	0.094377
SAR 1g (W/Kg)	0.125198

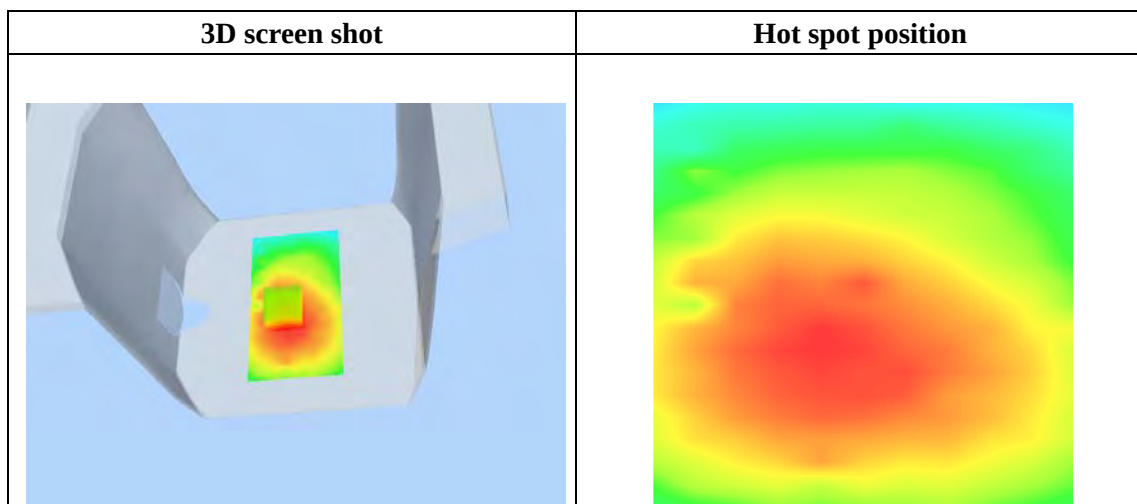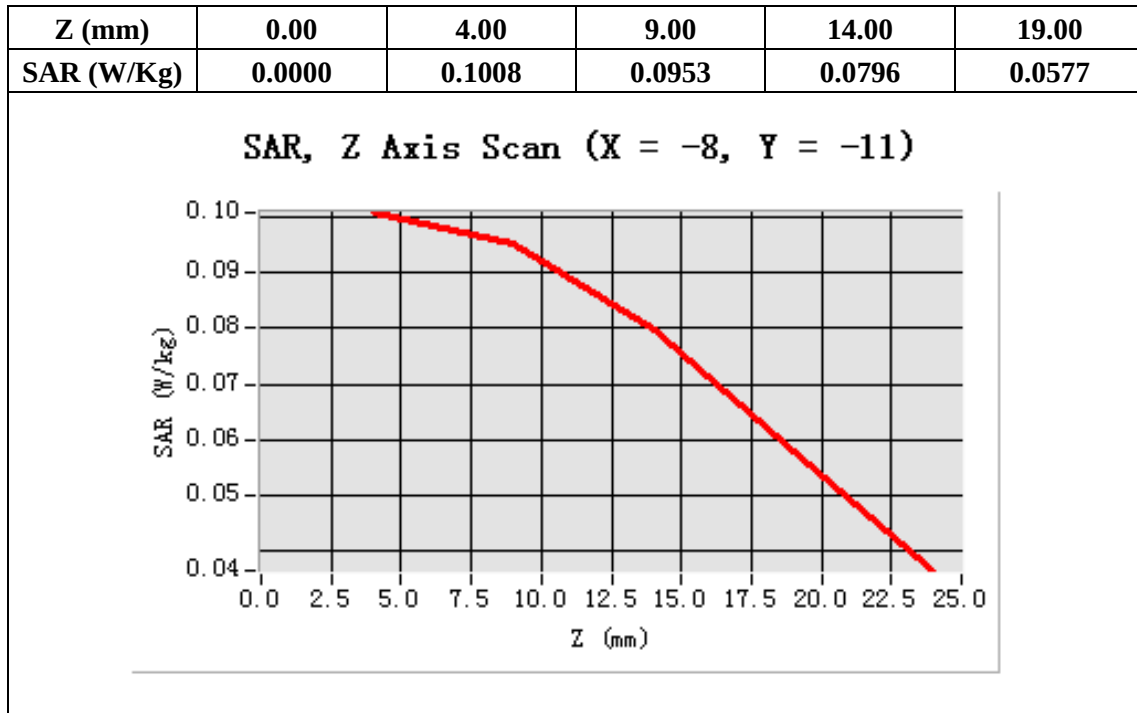

Test Laboratory: AGC Lab

Date: Jul 18,2012

GSM 850 Mid- Body- Back (MS with earphone)

DUT: WCDMA MOBILE PHONE; Type: ANDROID 5100

Communication System: Generic GSM; Communication System Band: GSM 850; Duty Cycle: 1:8.3;

Conv.F=6.79;Frequency: 836.6 MHz; Medium parameters used: $f = 835$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 55.43$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

Ambient temperature (°C): 21.0, Liquid temperature (°C): 21.0

Satimo Configuration:


Probe:SSE5; Calibrated: 12/09/2011

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM1; Type: SAM
- Measurement SW: OpenSAR V4_02_01

Configuration/GSM850 Mid Body-Back/Area Scan (6x8x1): Measurement grid: dx=20mm, dy=20mm



Configuration/GSM850 Mid Body-Back/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

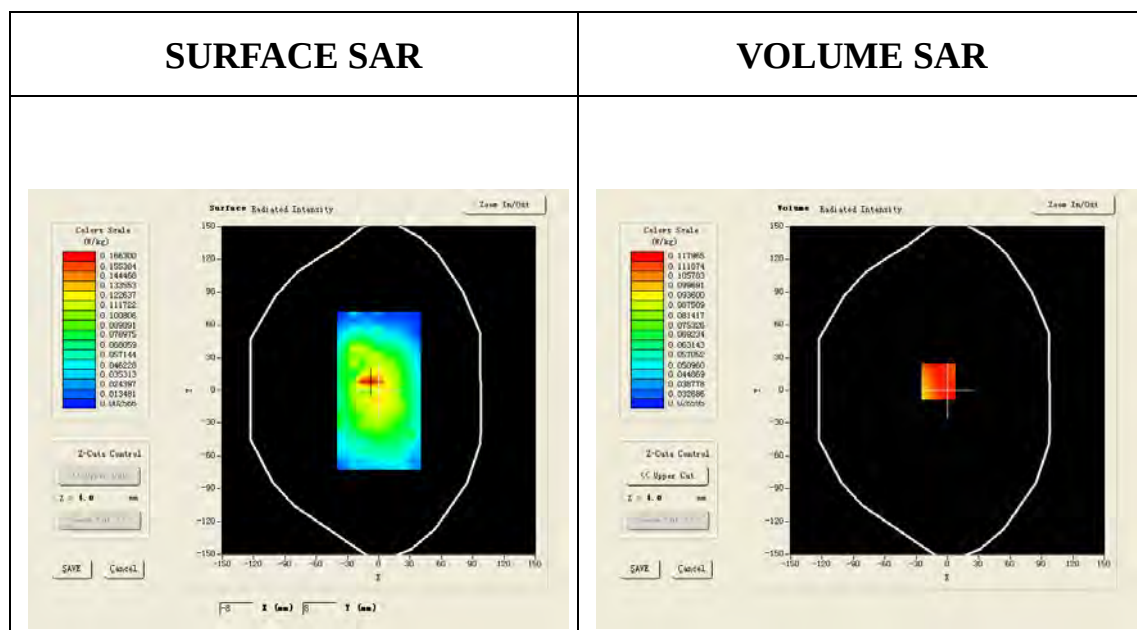

Maximum location: X=-9.00, Y=8.00

SAR 10g (W/Kg)	0.090087
SAR 1g (W/Kg)	0.123000

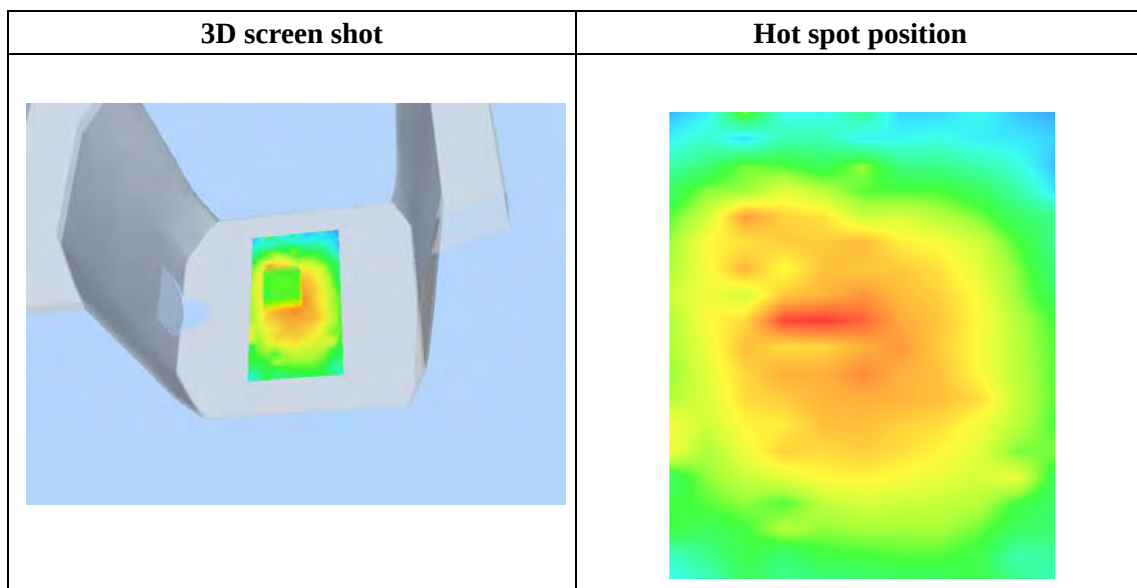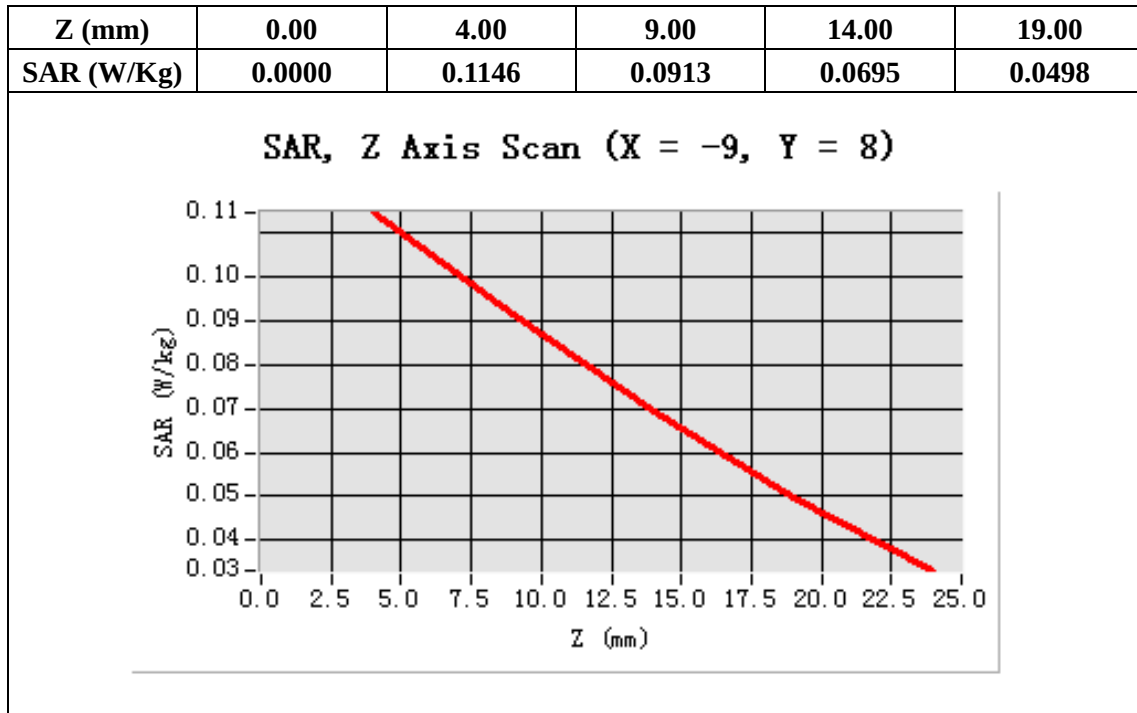

Test Laboratory: AGC Lab**Date: Jul 18,2012****PCS 1900 Mid-Touch Left****DUT: WCDMA MOBILE PHONE; Type: ANDROID 5100**

Communication System: Generic GSM; Communication System Band: PCS 1900; Duty Cycle: 1:8.3;

Conv.F=6.42;Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 40.07$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section


Ambient temperature (°C): 21.0, Liquid temperature (°C): 21.0

Satimo Configuration:



- Probe:SSE5; Calibrated: 12/09/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM1; Type: SAM
- Measurement SW: OpenSAR V4_02_01

Configuration/PCS1900 Mid Touch-Left/Area Scan: Measurement grid: dx=20mm, dy=20mm**Configuration/PCS1900 Mid Touch-Left/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;**

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Left head
Device Position	Cheek
Band	GSM1900
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

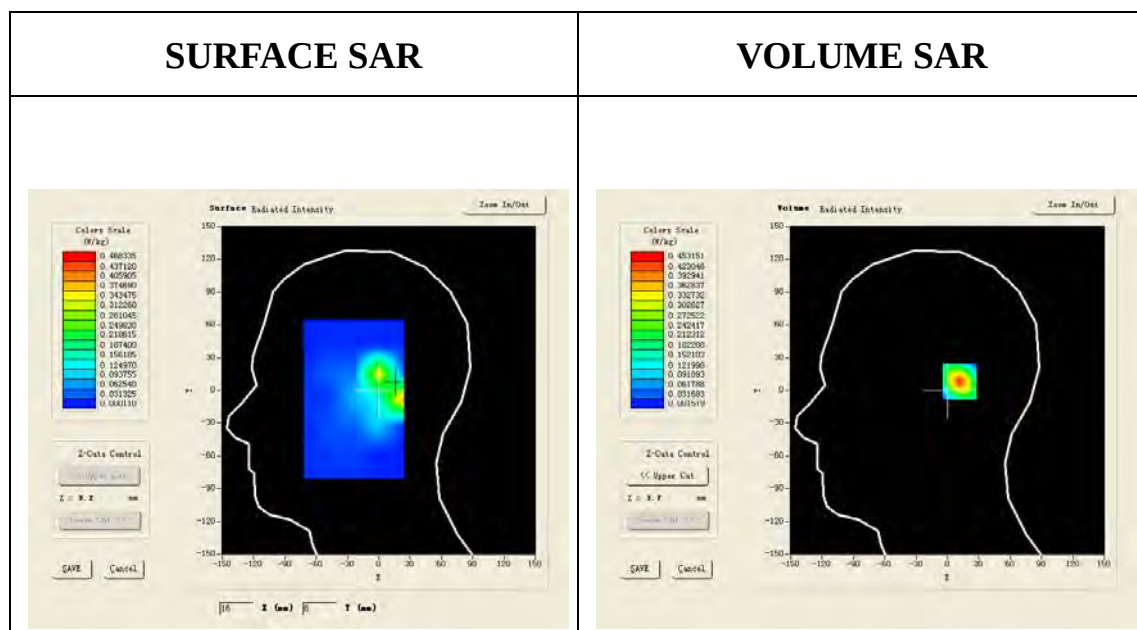**Maximum location: X=17.00, Y=8.00**

SAR 10g (W/Kg)	0.194384
SAR 1g (W/Kg)	0.412345

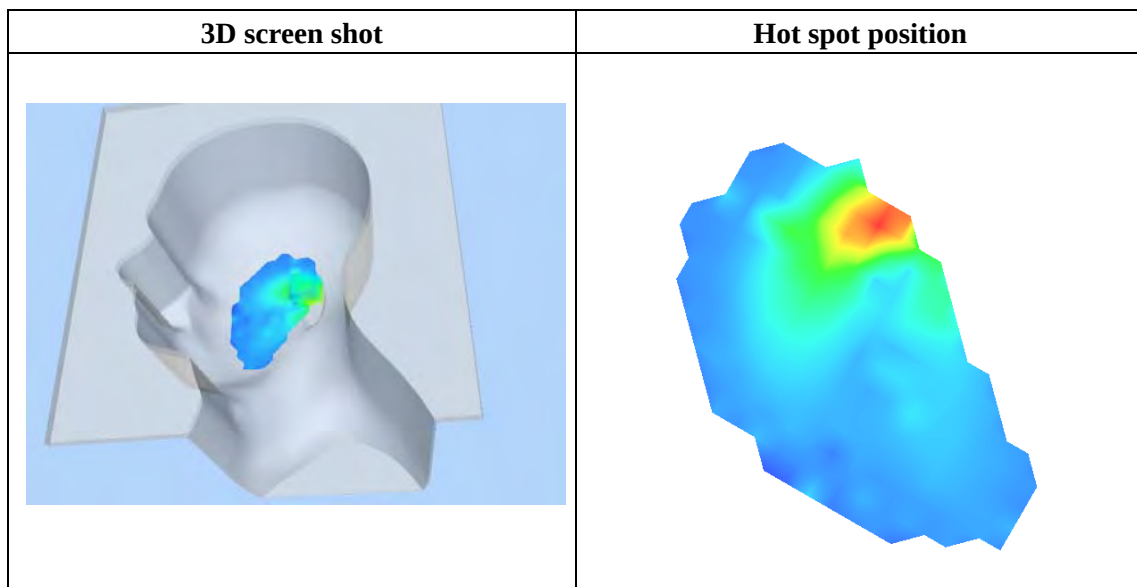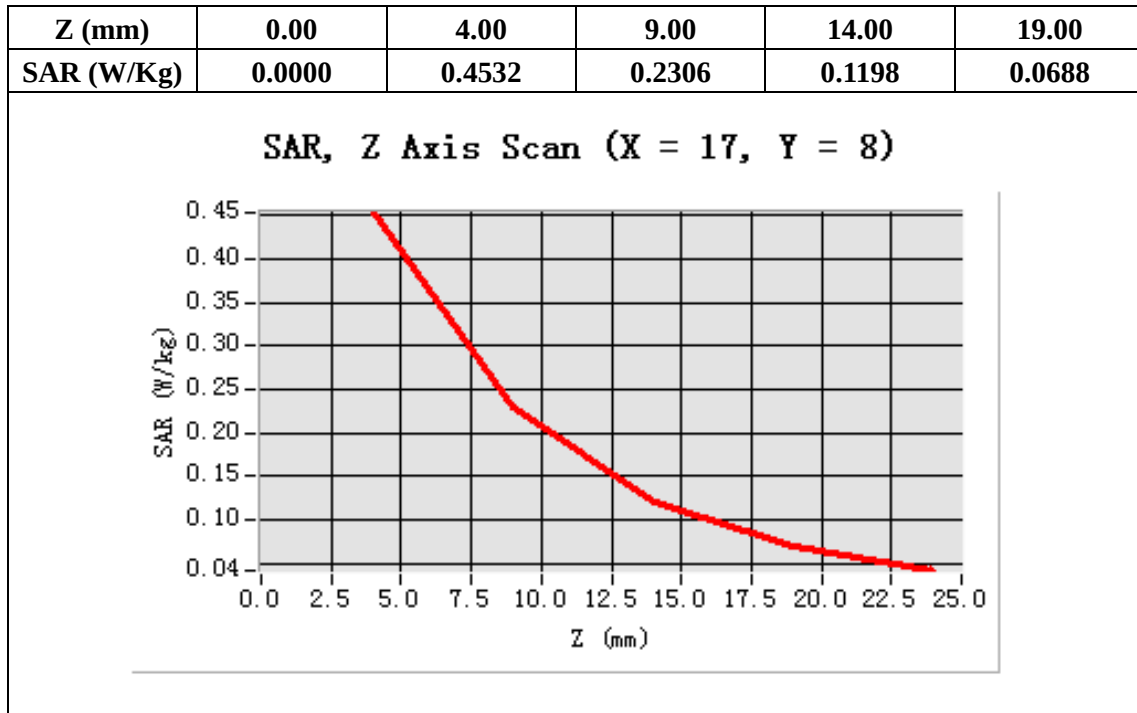

Test Laboratory: AGC Lab

Date: Jul 18,2012

PCS 1900 Mid-Tilt-Left

DUT: WCDMA MOBILE PHONE; Type: ANDROID 5100

Communication System: Generic GSM; Communication System Band: PCS 1900; Duty Cycle: 1:8.3;

Conv.F=6.42;Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 40.07$; $\rho = 1000$ kg/m³ ;

Phantom section: Left Section

Ambient temperature (°C): 21.0, Liquid temperature (°C): 21.0


Satimo Configuration:

- Probe:SSE5; Calibrated: 12/09/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM1; Type: SAM
- Measurement SW: OpenSAR V4_02_01

Configuration/PCS1900 Mid Tilt-Left/Area Scan: Measurement grid: dx=20mm, dy=20mm



Configuration/PCS1900 Mid Tilt-Left/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Left head
Device Position	Tilt
Band	GSM1900
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

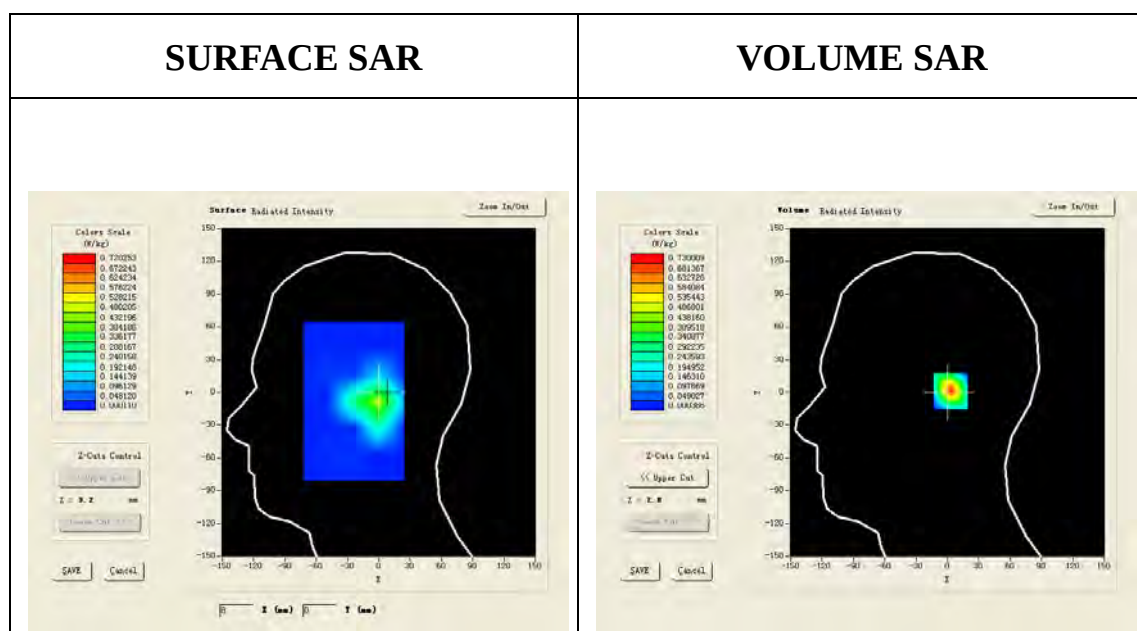

Maximum location: X=8.00, Y=1.00

SAR 10g (W/Kg)	0.290451
SAR 1g (W/Kg)	0.659694

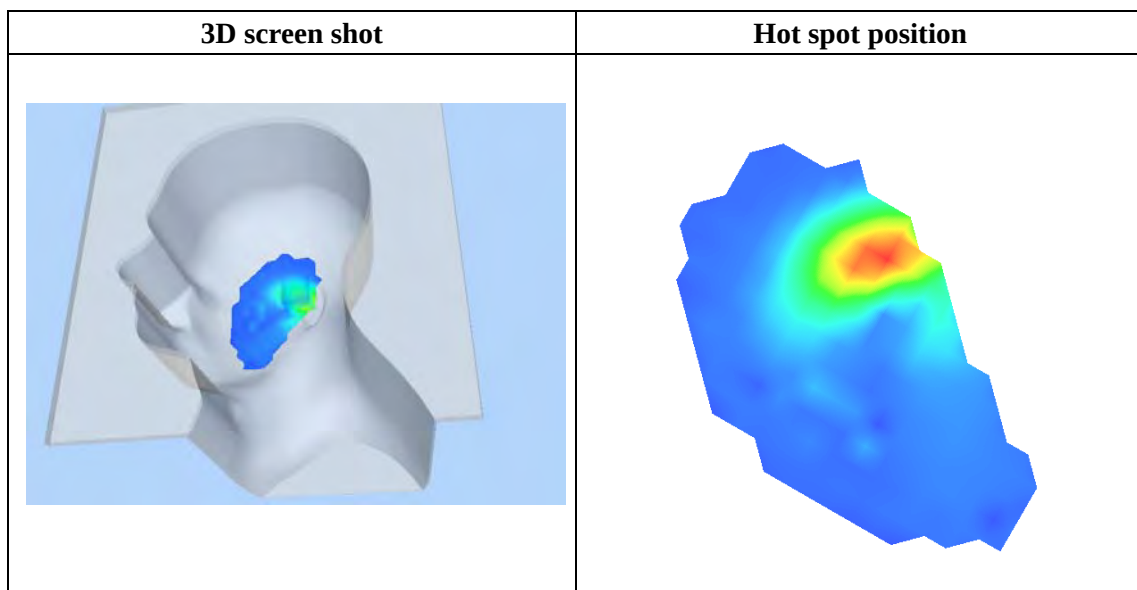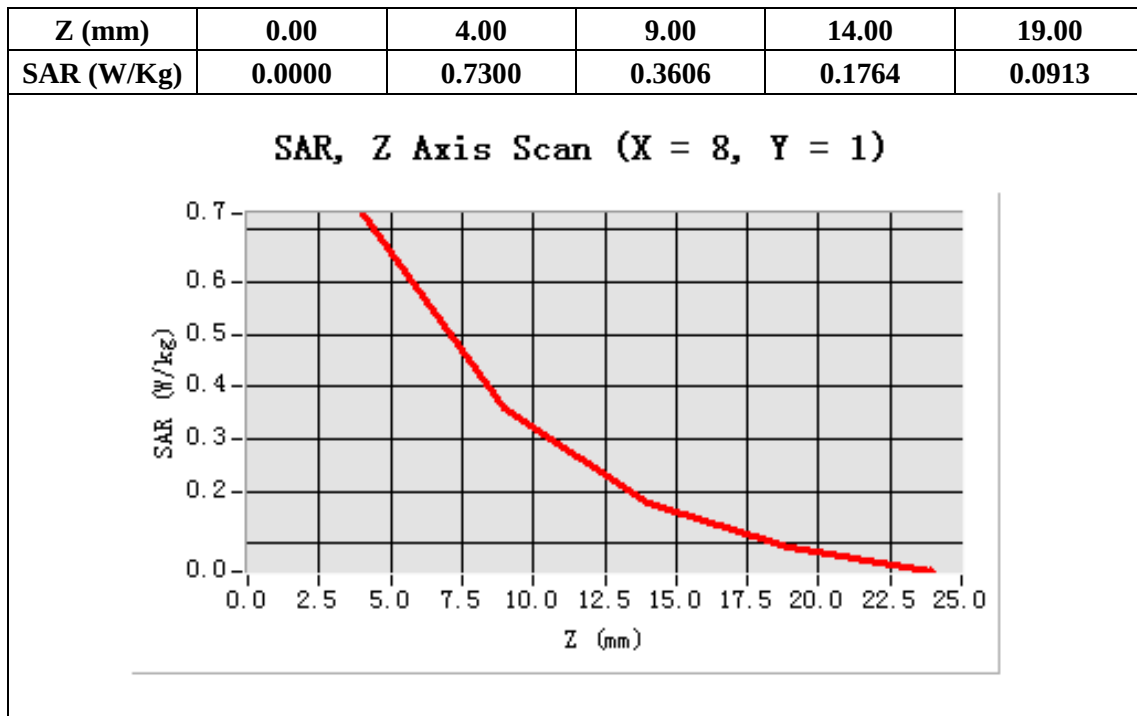


Date: Jul 18,2012

DUT: WCDMA MOBILE PHONE; Type: ANDROID 5100



Ambient temperature (°C): 21.0, Liquid temperature (°C): 21.0

- Measurement SW: OpenSAR V4_02_01

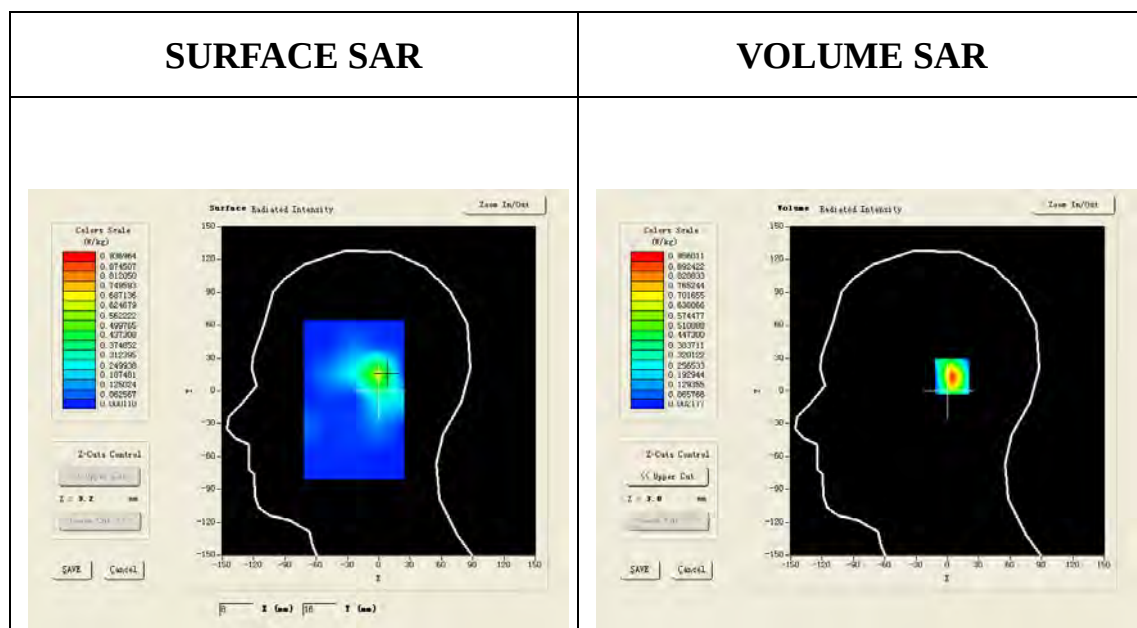 $dy=8\text{mm}, dz=5\text{mm};$ 

Maximum location: X=9.00, Y=13.00

SAR 10g (W/Kg)	0.371701
SAR 1g (W/Kg)	0.865739

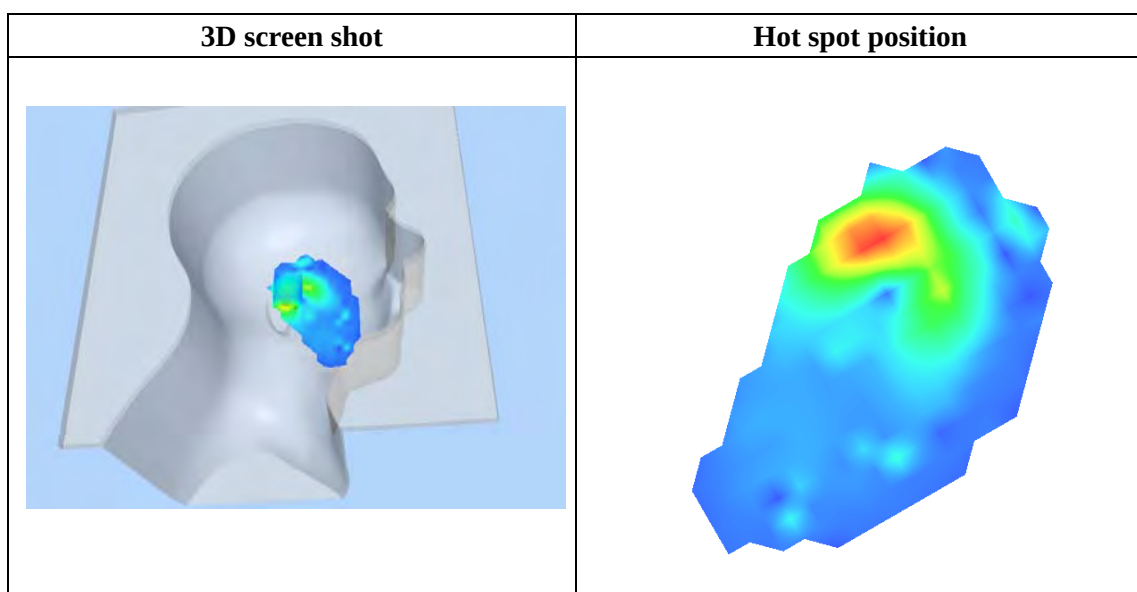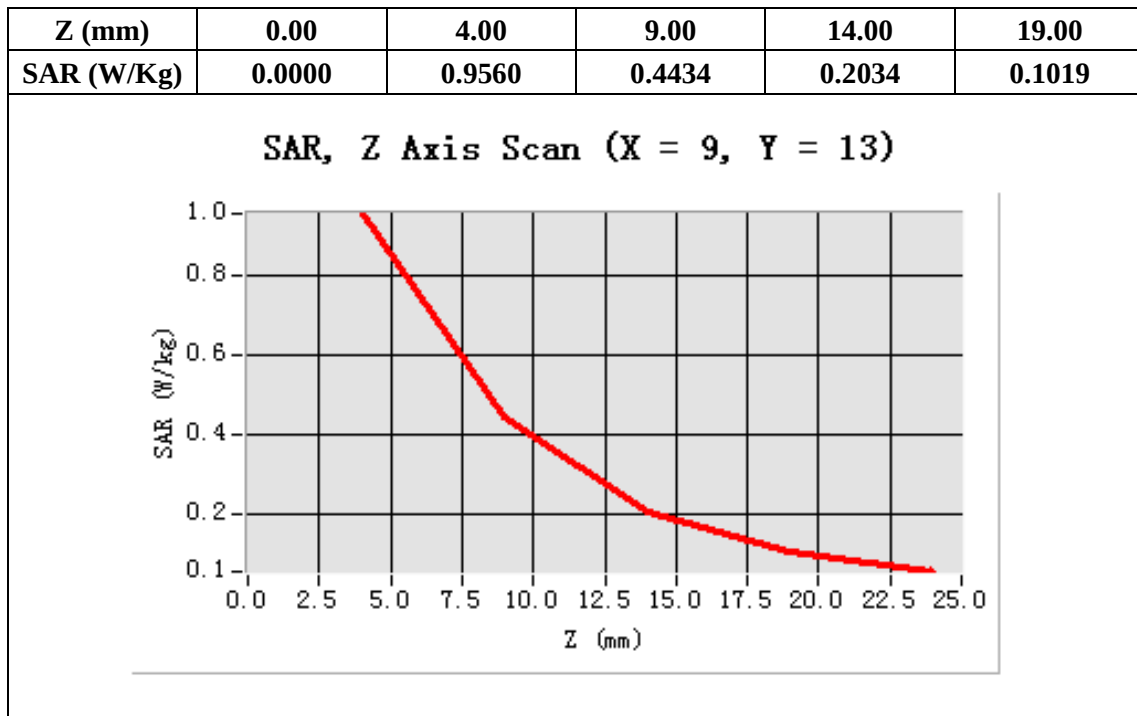

Test Laboratory: AGC Lab

Date: Jul 18,2012

PCS 1900 Mid-Touch Right

DUT: WCDMA MOBILE PHONE; Type: ANDROID 5100

Communication System: Generic GSM; Communication System Band: PCS 1900; Duty Cycle: 1:8.3;

Conv.F=6.42;Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 40.07$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

Ambient temperature (°C): 21.0, Liquid temperature (°C): 21.0

Satimo Configuration:


- Probe:SSE5; Calibrated: 12/09/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM1; Type: SAM
- Measurement SW: OpenSAR V4_02_01

Configuration/PCS1900 Mid Touch-Right/Area Scan: Measurement grid: dx=20mm, dy=20mm

Configuration/PCS1900 Mid Touch-Right/Zoom Scan: Measurement grid: dx=8mm,



dy=8mm, dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Right head
Device Position	Cheek
Band	GSM1900
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

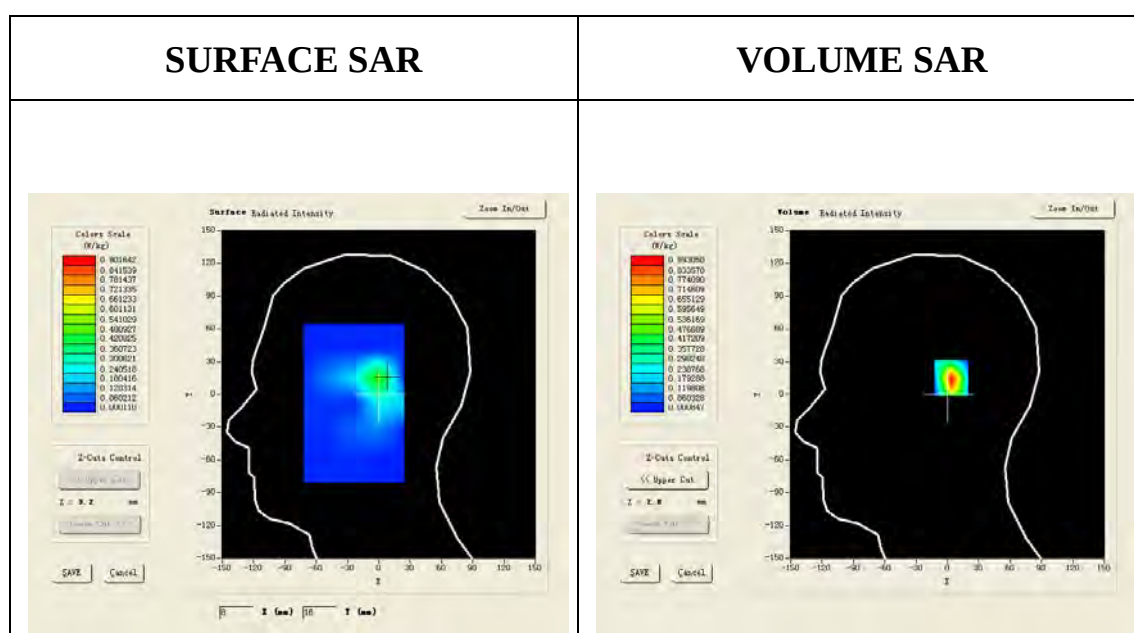

Maximum location: X=8.00, Y=15.00

SAR 10g (W/Kg)	0.350625
SAR 1g (W/Kg)	0.811500

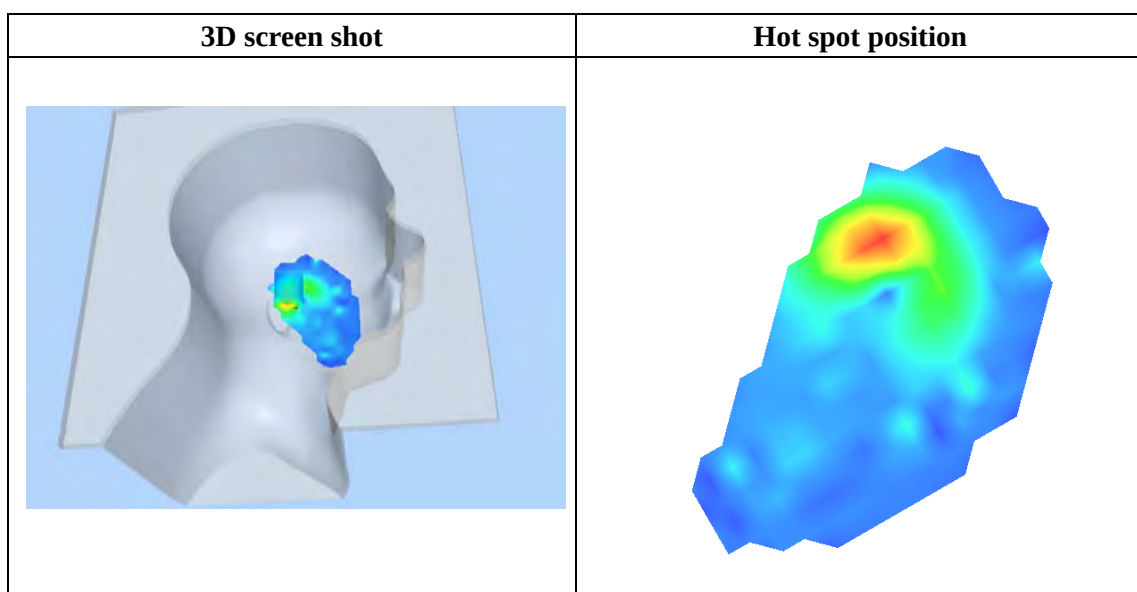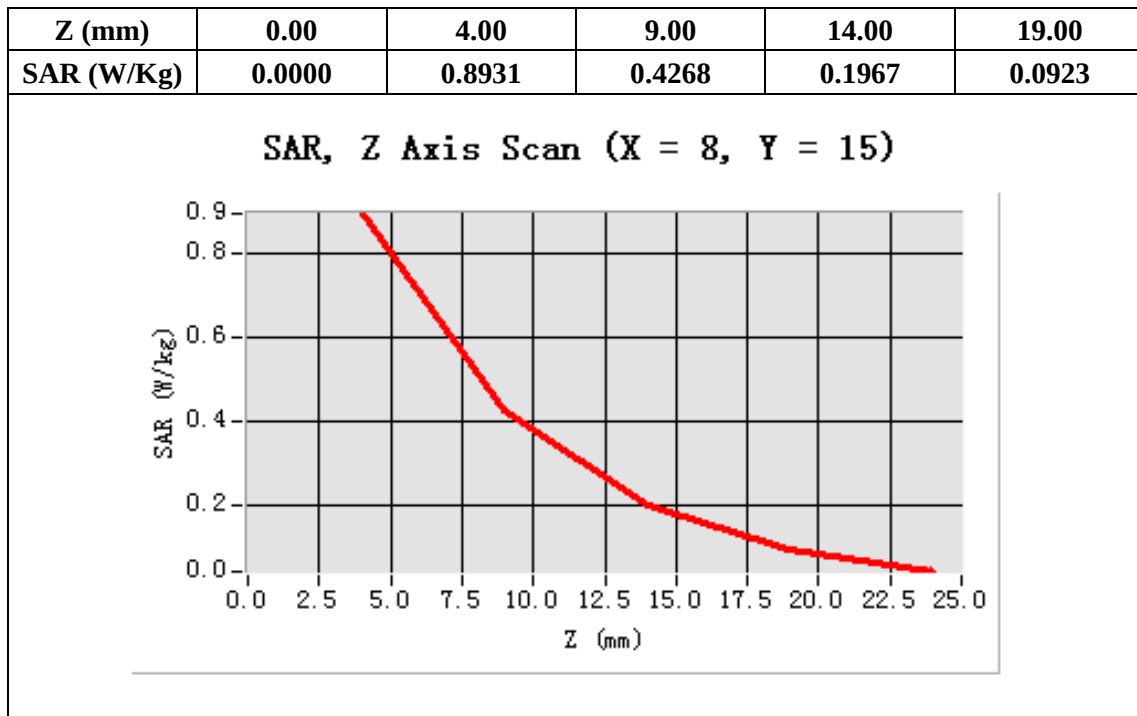

Test Laboratory: AGC Lab

Date: Jul 18,2012

PCS 1900 High-Touch Right

DUT: WCDMA MOBILE PHONE; Type: ANDROID 5100

Communication System: Generic GSM; Communication System Band: PCS 1900; Duty Cycle: 1:8.3;

Conv.F=6.42;Frequency: 1909.8 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 40.07$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

Ambient temperature (°C): 21.0, Liquid temperature (°C): 21.0


Satimo Configuration:

- Probe:SSE5; Calibrated: 12/09/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM1; Type: SAM
- Measurement SW: OpenSAR V4_02_01

Configuration/PCS1900 High- Touch-Right/Area Scan: Measurement grid: dx=20mm, dy=20mm



Configuration/PCS1900 High- Touch-Right/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Right head
Device Position	Cheek
Band	GSM1900
Channels	High
Signal	TDMA (Crest factor: 8.0)

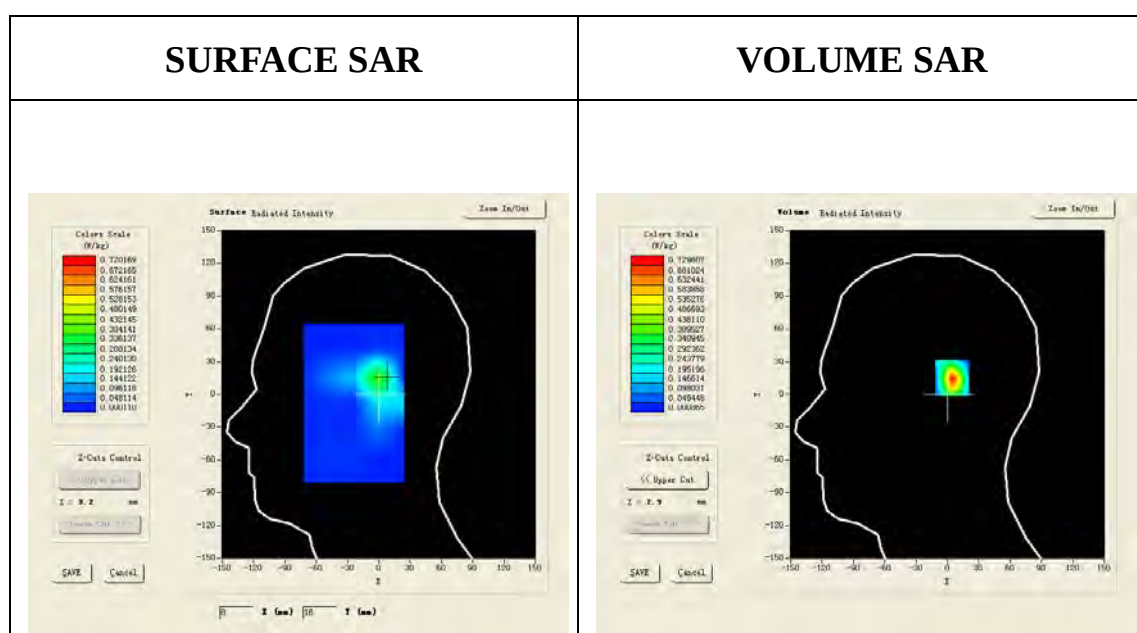

Maximum location: X=9.00, Y=15.00

SAR 10g (W/Kg)	0.273277
SAR 1g (W/Kg)	0.659906

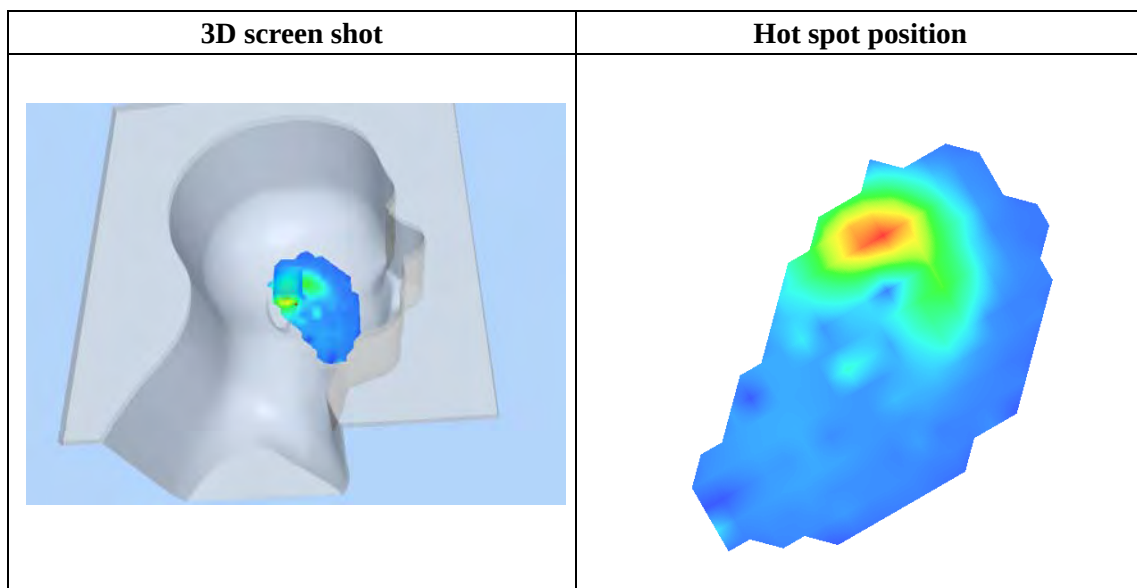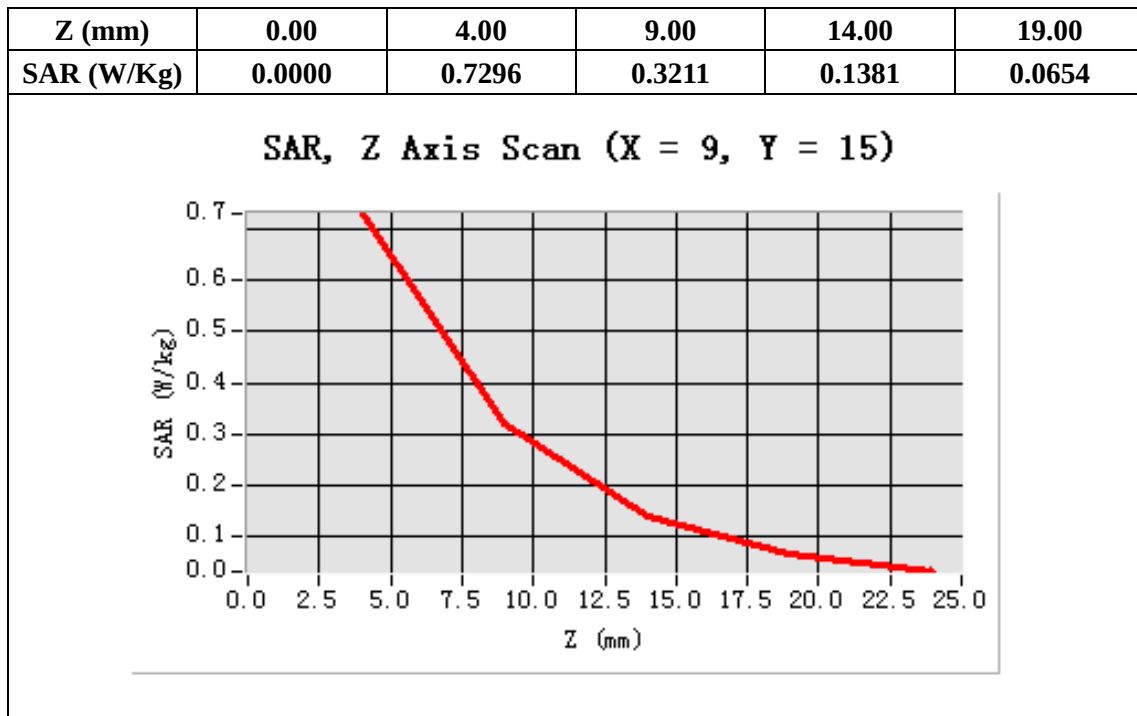

Test Laboratory: AGC Lab

Date: Jul 18,2012

PCS 1900 Low-Tilt Right

DUT: WCDMA MOBILE PHONE; Type: ANDROID 5100

Communication System: Generic GSM; Communication System Band: PCS 1900; Duty Cycle: 1:8.3;

Conv.F=6.42; Frequency: 1850.2MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 40.07$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

Ambient temperature (°C): 21.0, Liquid temperature (°C): 21.0


Satimo Configuration:

- Probe:SSE5; Calibrated: 12/09/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM1; Type: SAM
- Measurement SW: OpenSAR V4_02_01

Configuration/PCS1900 Low- Tilt-Right/Area Scan: Measurement grid: dx=20mm, dy=20mm



Configuration/PCS1900 Low- Tilt-Right/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Right head
Device Position	Tilt
Band	GSM1900
Channels	Low
Signal	TDMA (Crest factor: 8.0)

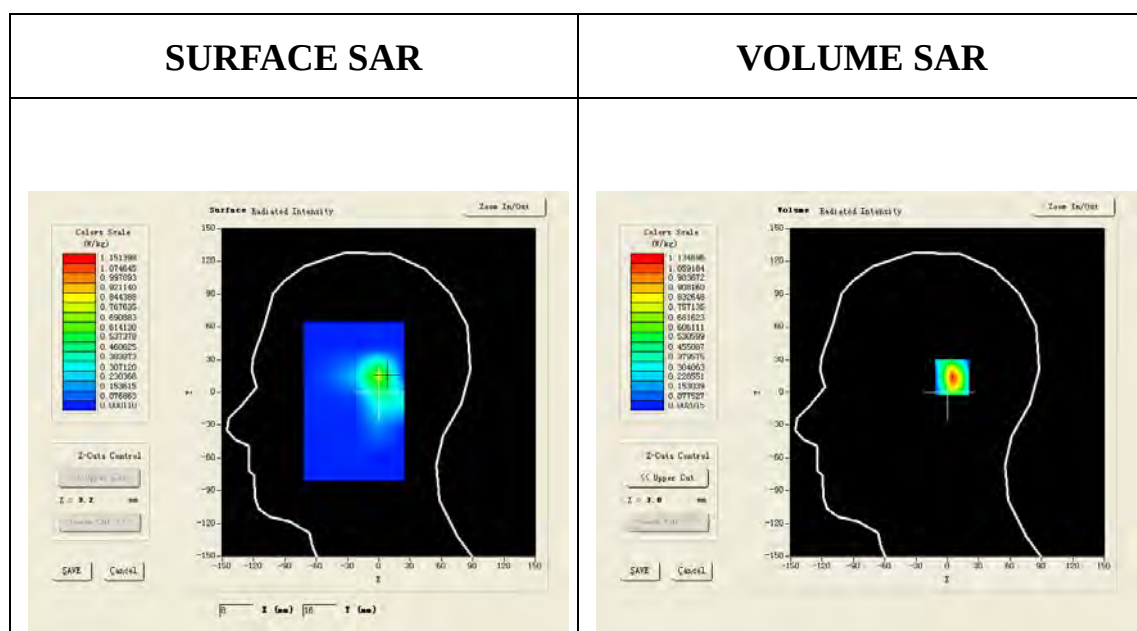

Maximum location: X=9.00, Y=14.00

SAR 10g (W/Kg)	0.450919
SAR 1g (W/Kg)	1.028436

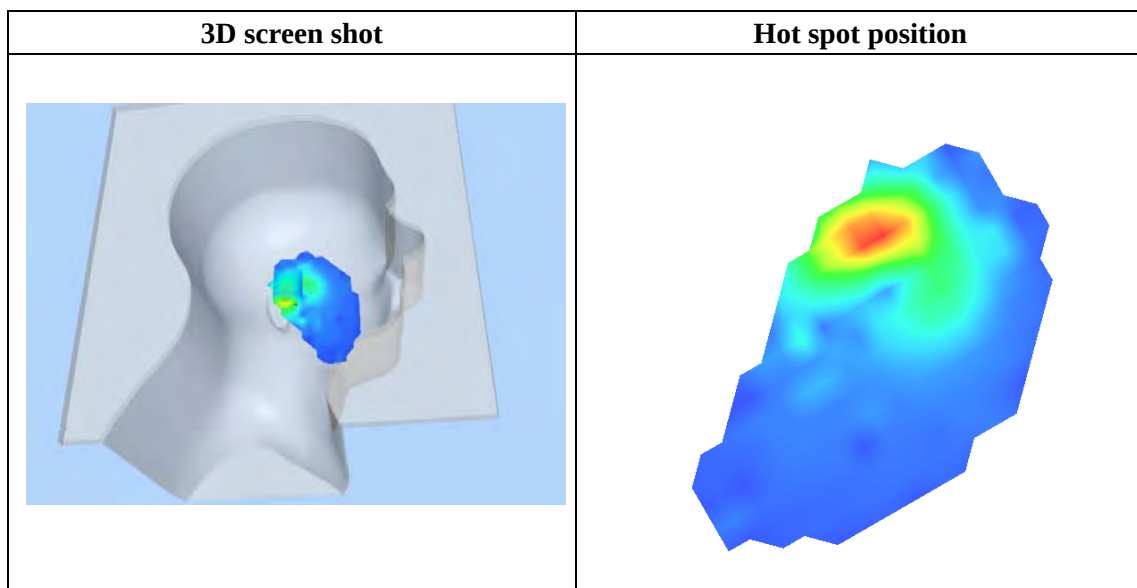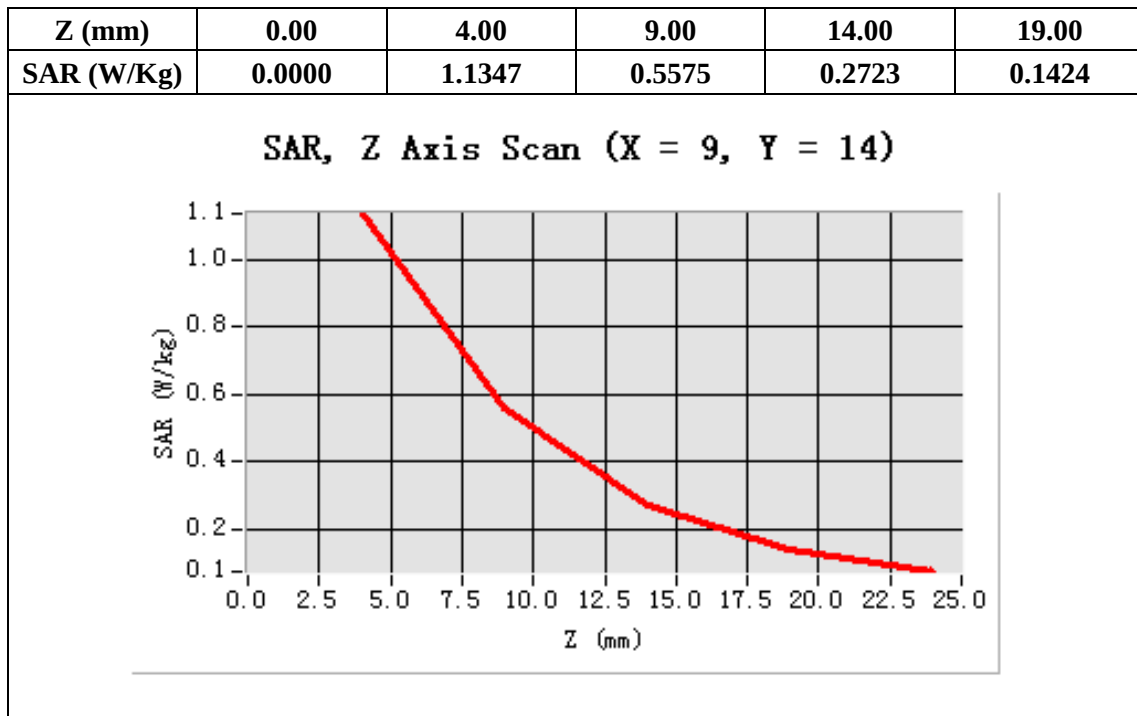

Test Laboratory: AGC Lab

Date: Jul 18,2012

PCS 1900 Mid-Tilt Right

DUT: WCDMA MOBILE PHONE; Type: ANDROID 5100

Communication System: Generic GSM; Communication System Band: PCS 1900; Duty Cycle: 1:8.3;

Conv.F=6.42; Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 40.07$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

Ambient temperature (°C): 21.0, Liquid temperature (°C): 21.0


Satimo Configuration:

- Probe:SSE5; Calibrated: 12/09/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM1; Type: SAM
- Measurement SW: OpenSAR V4_02_01

Configuration/PCS1900 Mid Tilt-Right/Area Scan: Measurement grid: dx=20mm, dy=20mm



Configuration/PCS1900 Mid Tilt-Right/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Right head
Device Position	Tilt
Band	GSM1900
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

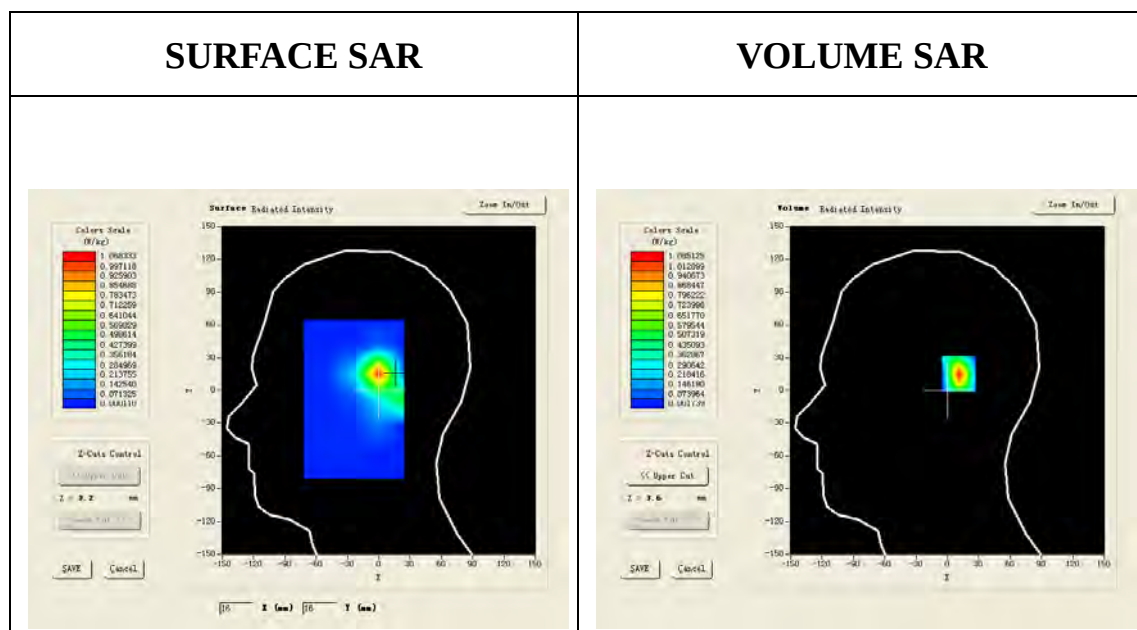

Maximum location: X=16.00, Y=15.00

SAR 10g (W/Kg)	0.414889
SAR 1g (W/Kg)	0.985119

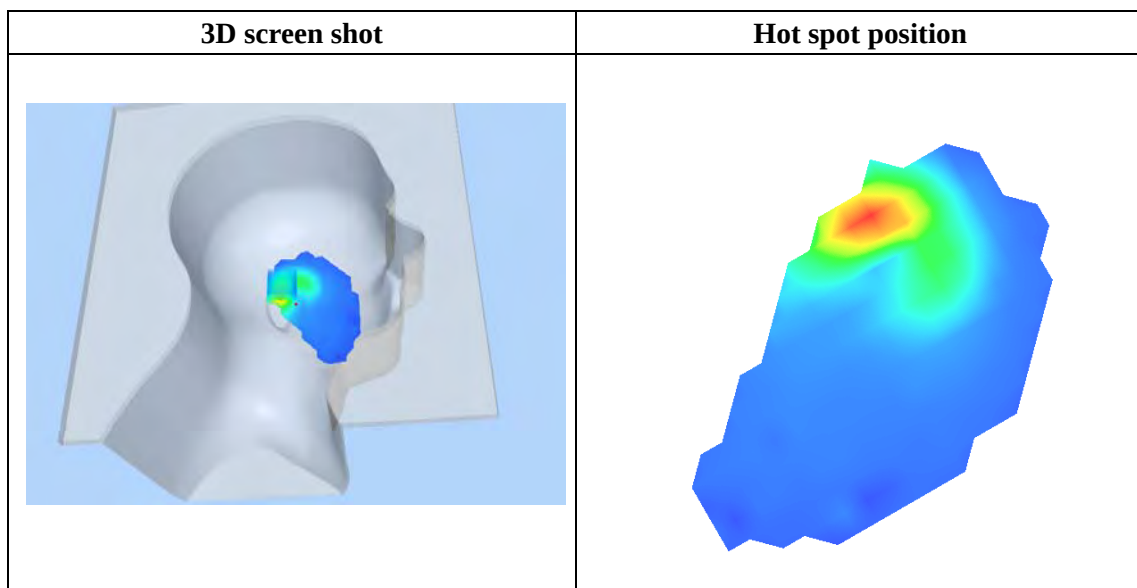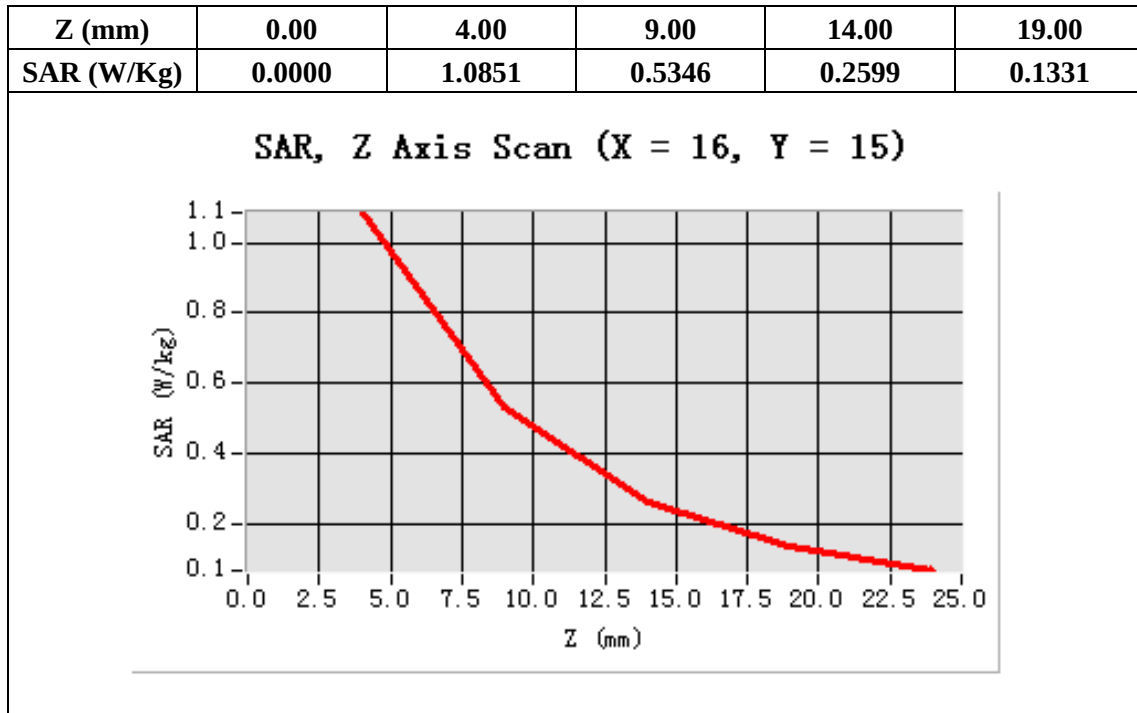

Test Laboratory: AGC Lab

Date: Jul 18,2012

PCS 1900 High-Tilt Right

DUT: WCDMA MOBILE PHONE; Type: ANDROID 5100

Communication System: Generic GSM; Communication System Band: PCS 1900; Duty Cycle: 1:8.3;

Conv.F=6.42; Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 40.07$; $\rho = 1000$ kg/m³ ;

Phantom section: Right Section

Ambient temperature (°C): 21.0, Liquid temperature (°C): 21.0


Satimo Configuration:

- Probe:SSE5; Calibrated: 12/09/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM1; Type: SAM
- Measurement SW: OpenSAR V4_02_01

Configuration/PCS1900 High- Tilt-Right/Area Scan: Measurement grid: dx=20mm, dy=20mm



Configuration/PCS1900 High- Tilt-Right/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Right head
Device Position	Tilt
Band	GSM1900
Channels	High
Signal	TDMA (Crest factor: 8.0)

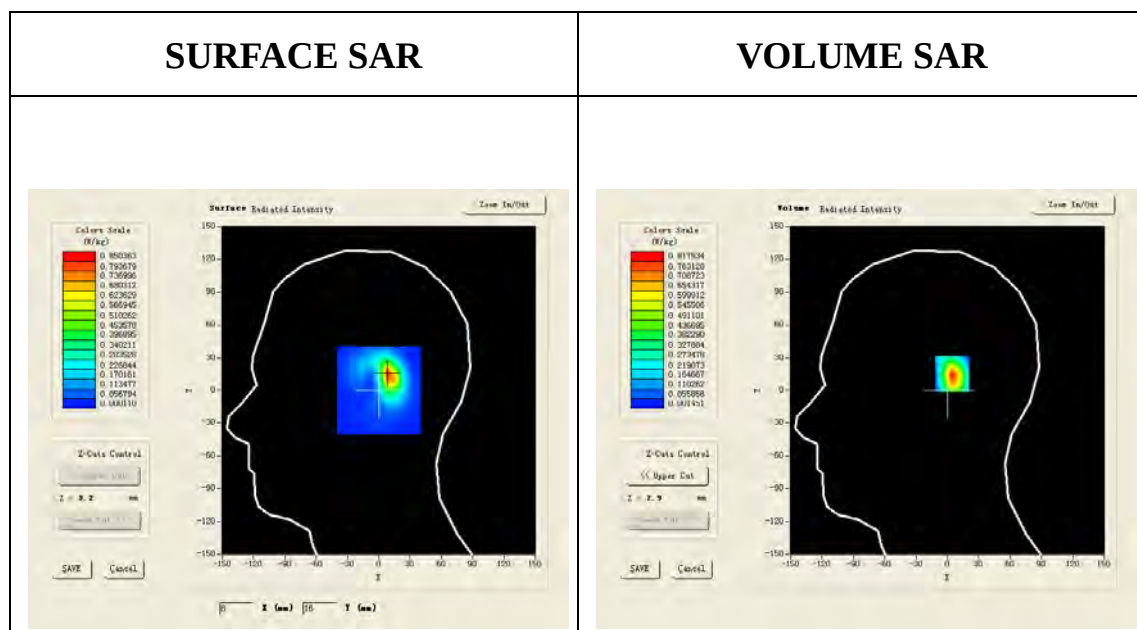

Maximum location: X=9.00, Y=15.00

SAR 10g (W/Kg)	0.321017
SAR 1g (W/Kg)	0.747023

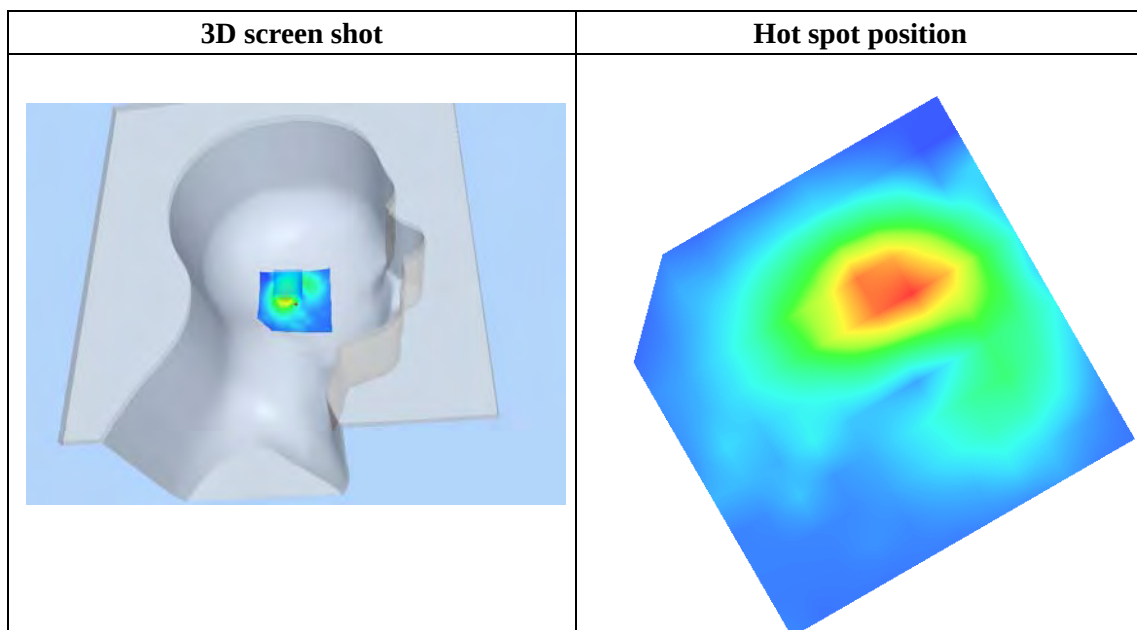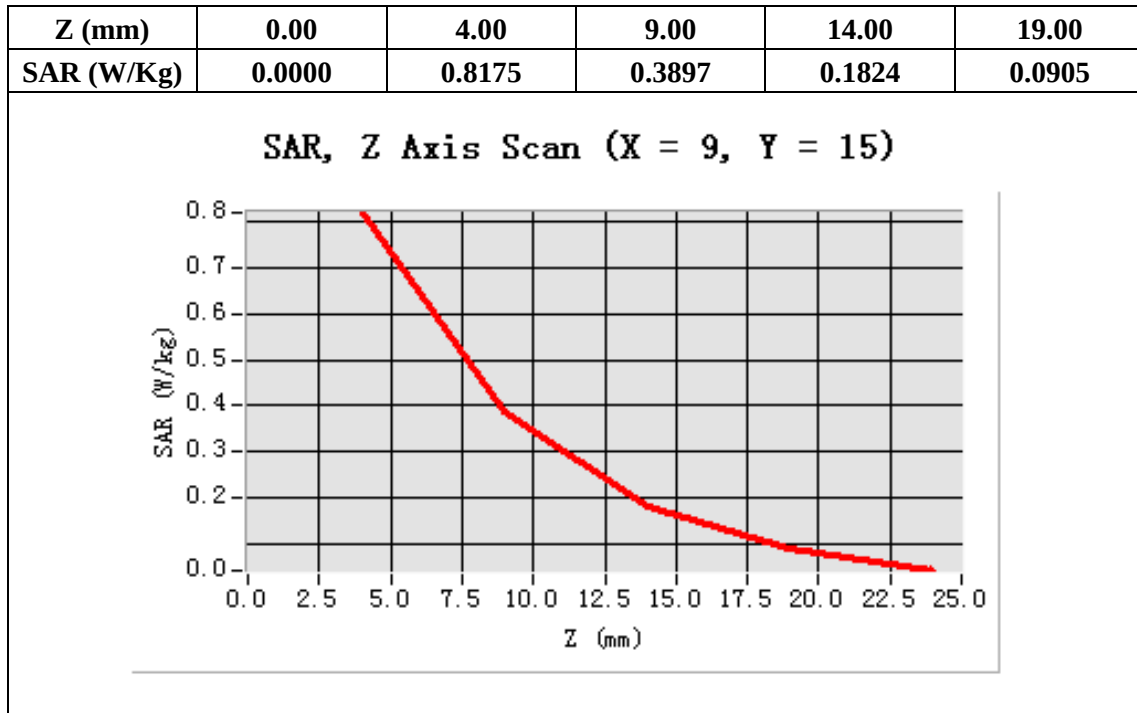

Test Laboratory: AGC Lab

Date: Jul 18,2012

PCS 1900 Mid-Body Back

DUT: WCDMA MOBILE PHONE; Type: ANDROID 5100

Communication System: Generic GSM; Communication System Band: PCS 1900; Duty Cycle: 1:8.3;

Conv.F=6.42;Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 53.28$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

Ambient temperature (°C): 21.0, Liquid temperature (°C): 21.0


Satimo Configuration:

- Probe:SSE5; Calibrated: 12/09/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM1; Type: SAM
- Measurement SW: OpenSAR V4_02_01

Configuration/PCS1900 Mid Body-Back/Area Scan: Measurement grid: dx=20mm, dy=20mm



Configuration/PCS1900 Mid Body-Back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

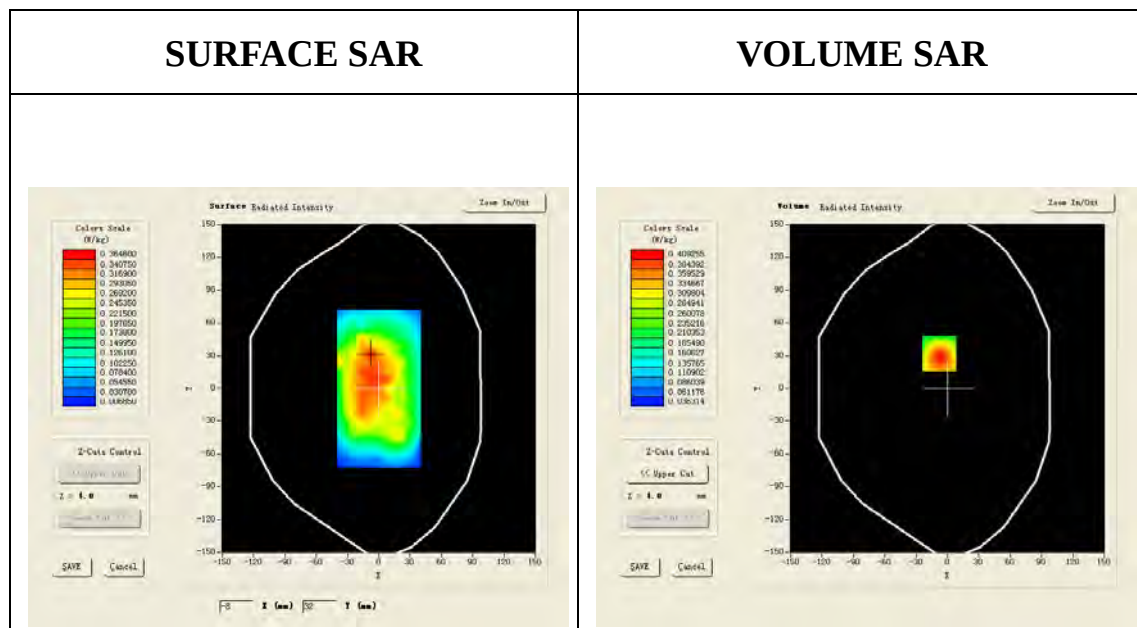

Maximum location: X=-8.00, Y=32.00

SAR 10g (W/Kg)	0.253858
SAR 1g (W/Kg)	0.428313

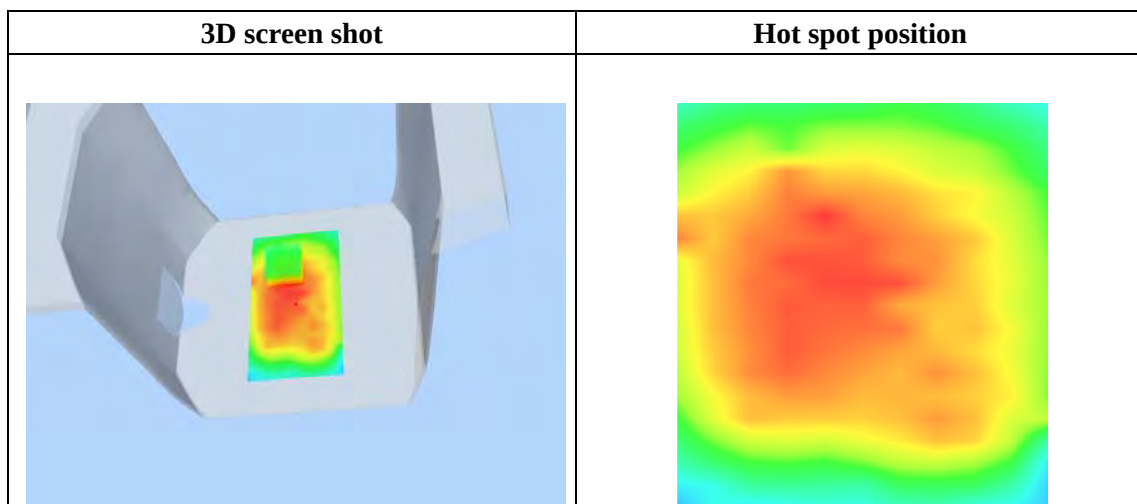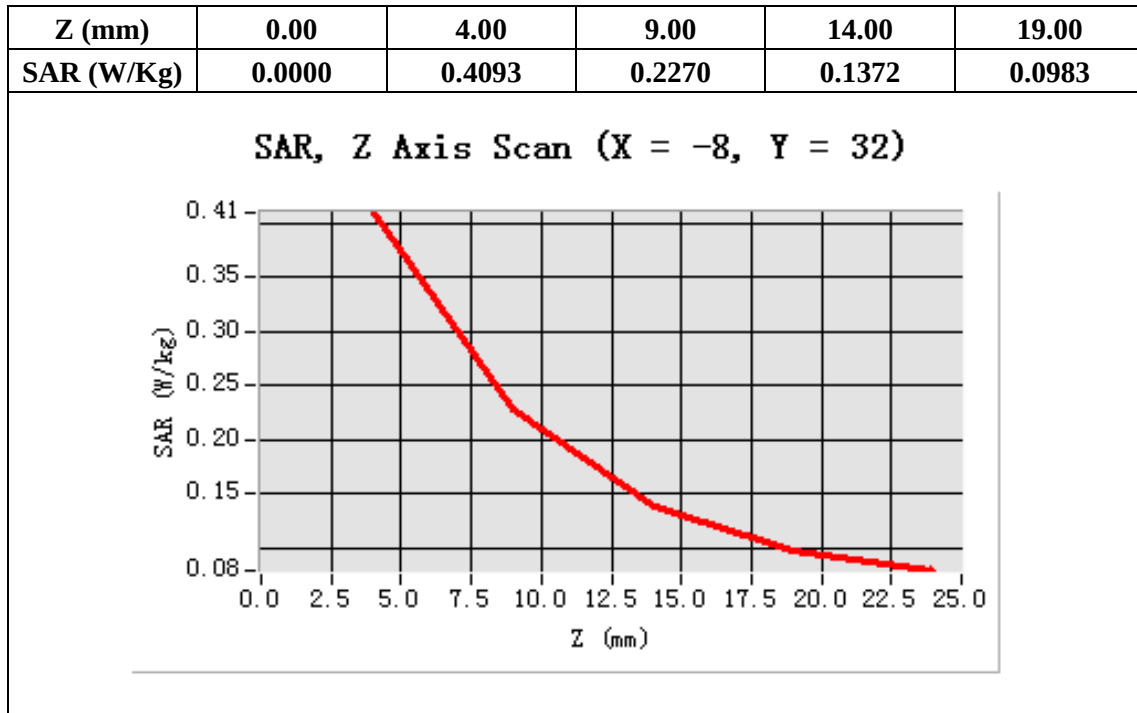

Test Laboratory: AGC Lab

Date: Jul 18,2012

PCS 1900 Mid-Body Back (2up)

DUT: WCDMA MOBILE PHONE; Type: ANDROID 5100

Communication System: GPRS-2 Slot; Communication System Band: PCS1900; Duty Cycle: 1:4.2 ;

Conv.F=6.42; Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 53.28$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

Ambient temperature (°C): 21.0, Liquid temperature (°C): 21.0


Satimo Configuration:

- Probe:SSE5; Calibrated: 12/09/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM1; Type: SAM
- Measurement SW: OpenSAR V4_02_01

Configuration/GPRS1900 Mid Body-Back/Area Scan: Measurement grid: dx=20mm, dy=20mm



Configuration/GPRS1900 Mid Body-Back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	Middle
Signal	TDMA (Crest factor: 4.0)

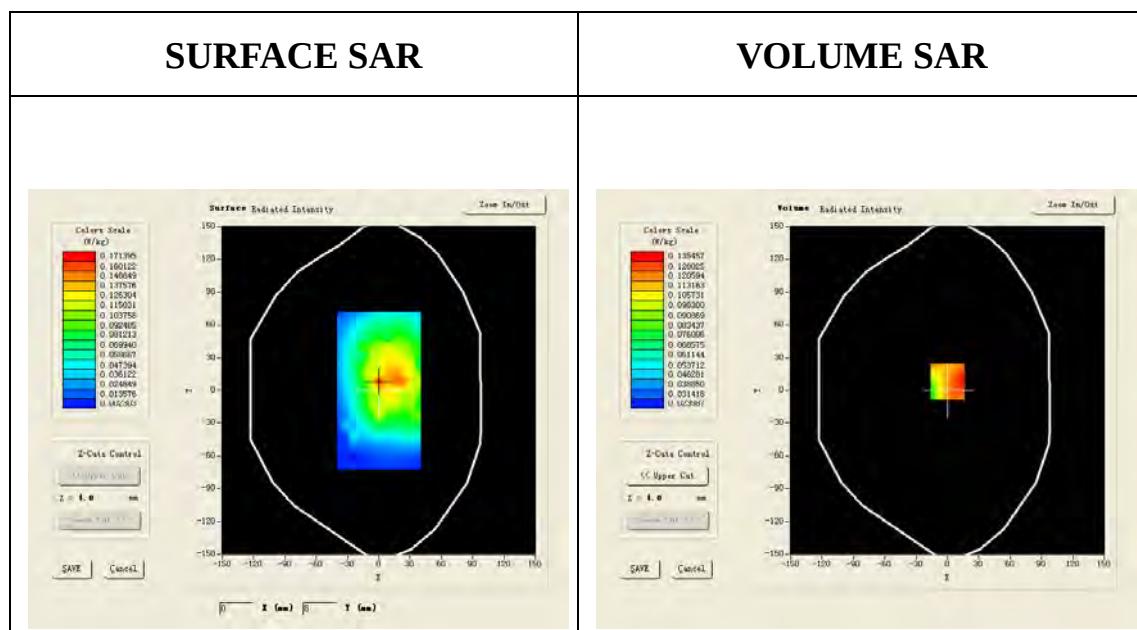

Maximum location: X=0.00, Y=8.00

SAR 10g (W/Kg)	0.098575
SAR 1g (W/Kg)	0.137673

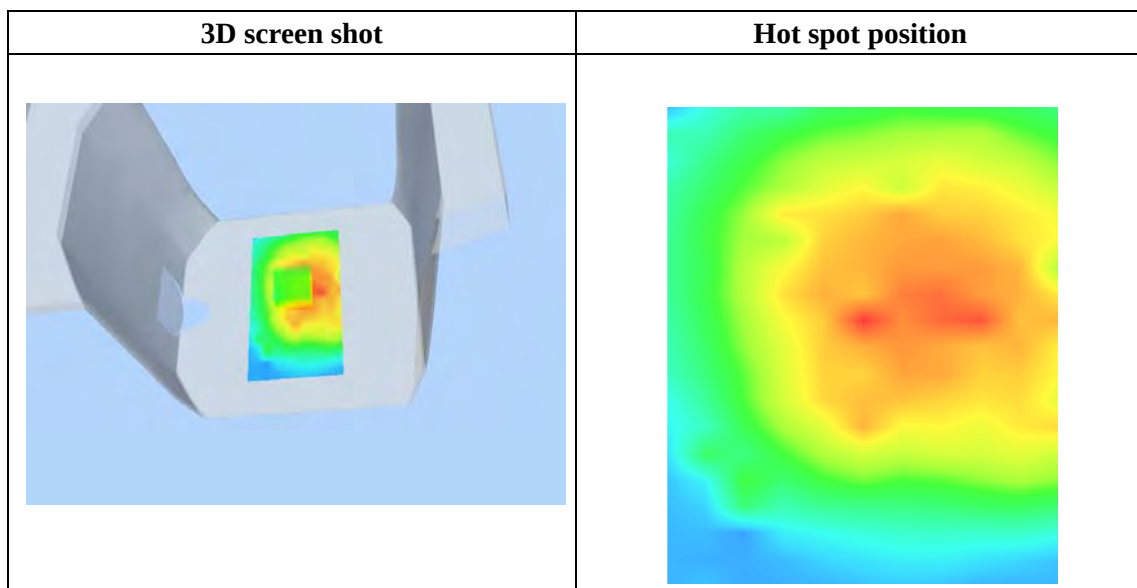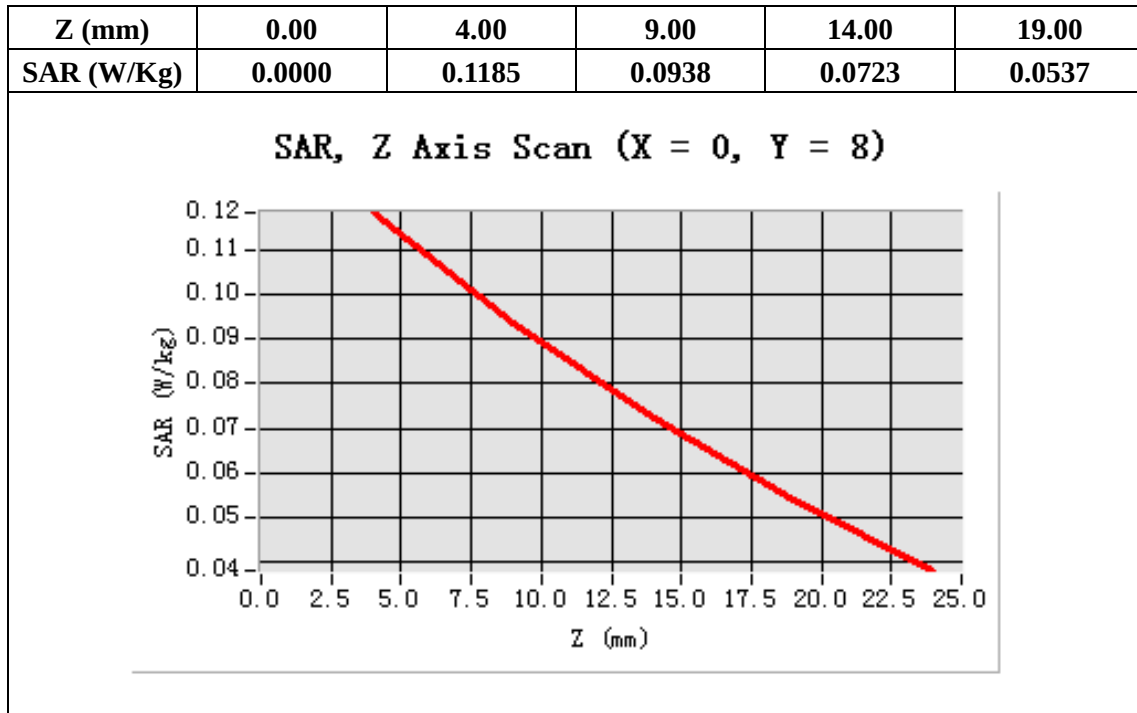

Test Laboratory: AGC Lab

Date: Jul 18,2012

PCS 1900 Mid-Body Back (3up)

DUT: WCDMA MOBILE PHONE; Type: ANDROID 5100

Communication System: GPRS-3 Slot; Communication System Band: PCS 1900; Duty Cycle:1:2.8 ;

Conv.F=6.42; Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 53.28$
 $\rho = 1000\text{kg/m}^3$;

Phantom section: Flat Section

Ambient temperature ($^{\circ}\text{C}$): 21.0, Liquid temperature ($^{\circ}\text{C}$): 21.0


Satimo Configuration:

- Probe:SSE5; Calibrated: 12/09/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM1; Type: SAM
- Measurement SW: OpenSAR V4_02_01

Configuration/GPRS1900 Mid Body-Back/Area Scan: Measurement grid: dx=20mm, dy=20mm



Configuration/GPRS1900 Mid Body-Back/Zoom Scan: Measurement grid: dx=8mm,
dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	Middle
Signal	TDMA (Crest factor: 2.7)

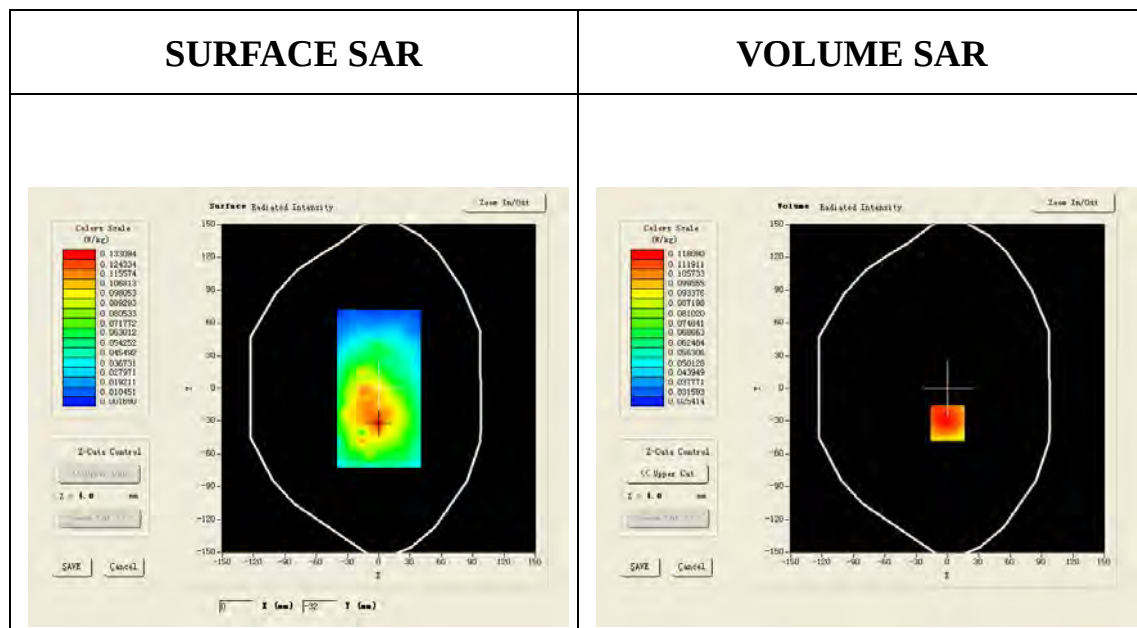

Maximum location: X=0.00, Y=-32.00

SAR 10g (W/Kg)	0.086049
SAR 1g (W/Kg)	0.125013

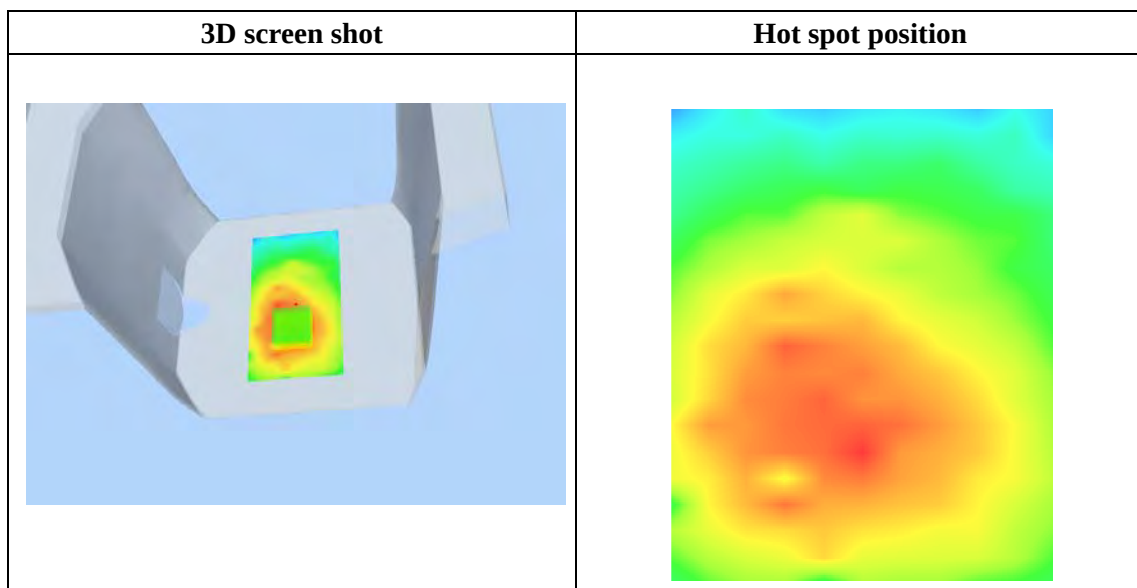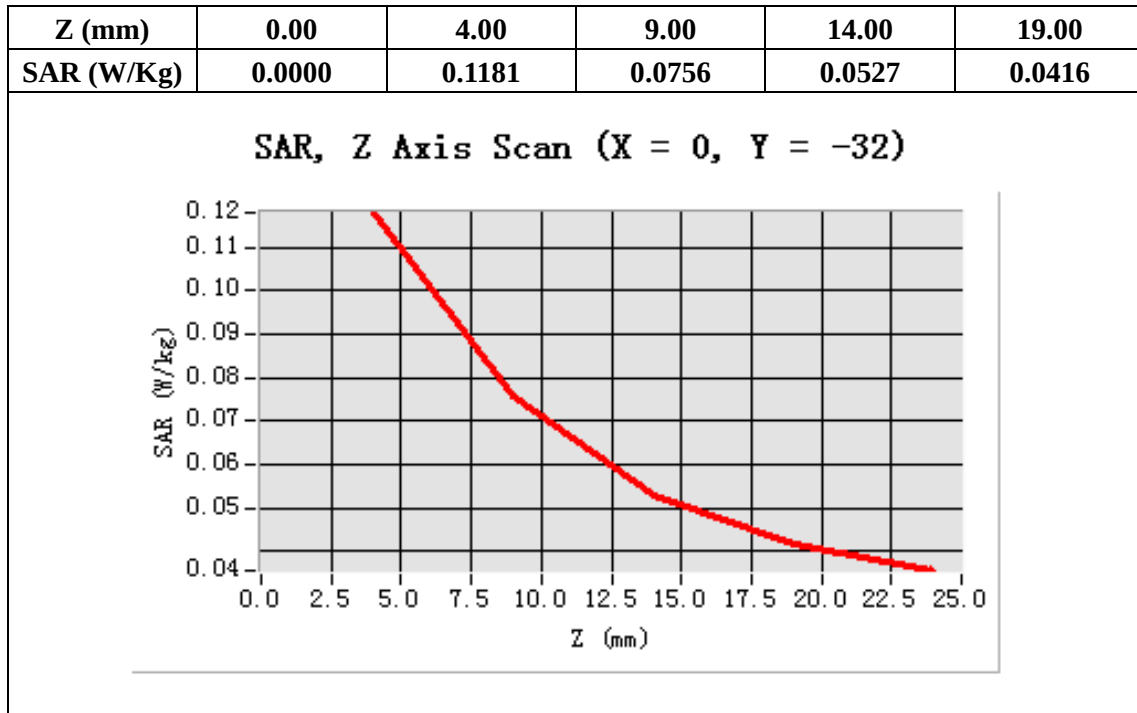

Test Laboratory: AGC Lab**Date: Jul 18,2012****PCS 1900 Mid-Body Back (4up)****DUT: WCDMA MOBILE PHONE; Type: ANDROID 5100**

Communication System: GPRS-4 Slot; Communication System Band: PCS 1900; Duty Cycle:1:2.1 ;

Conv.F=6.42;Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 53.28$; $\rho = 1000\text{kg/m}^3$;

Phantom section: Flat Section


Ambient temperature ($^{\circ}\text{C}$): 21.0, Liquid temperature ($^{\circ}\text{C}$): 21.0

Satimo Configuration:



- Probe:SSE5; Calibrated: 12/09/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM1; Type: SAM
- Measurement SW: OpenSAR V4_02_01

Configuration/GPRS1900 Mid Body-Back/Area Scan: Measurement grid: dx=20mm, dy=20mm**Configuration/GPRS1900 Mid Body-Back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;**

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	Middle
Signal	TDMA (Crest factor: 2.0)

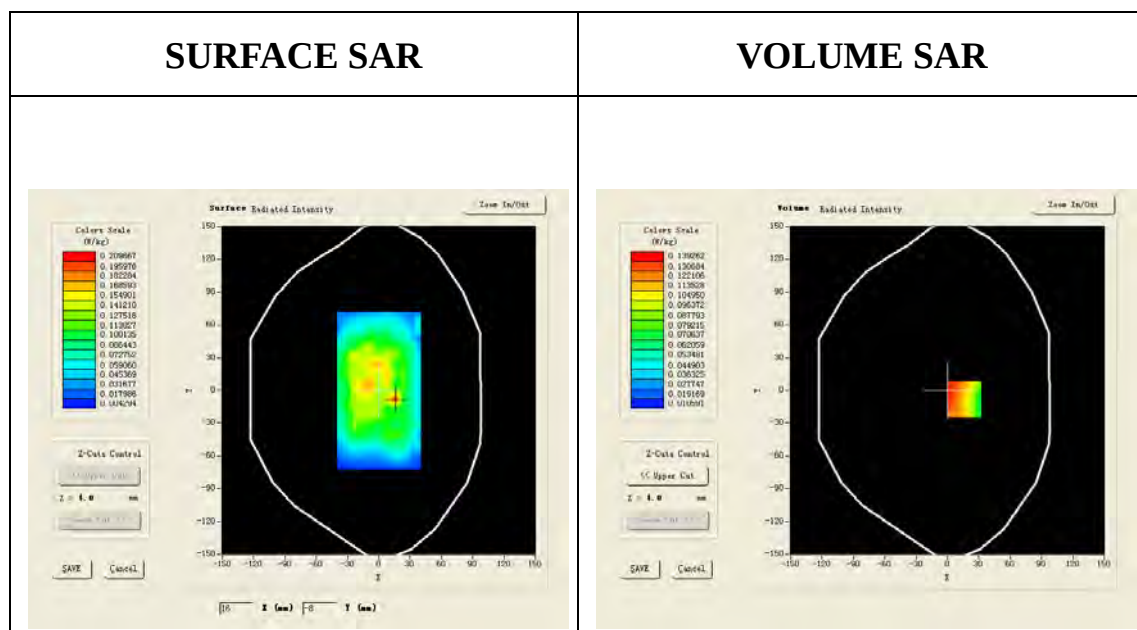**Maximum location: X=16.00, Y=-8.00**

SAR 10g (W/Kg)	0.084880
SAR 1g (W/Kg)	0.137837

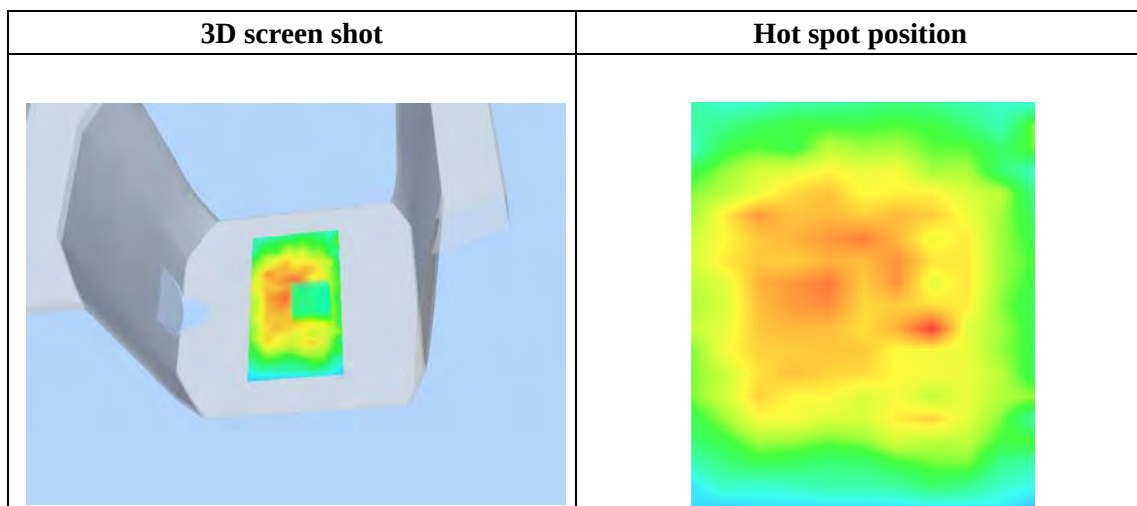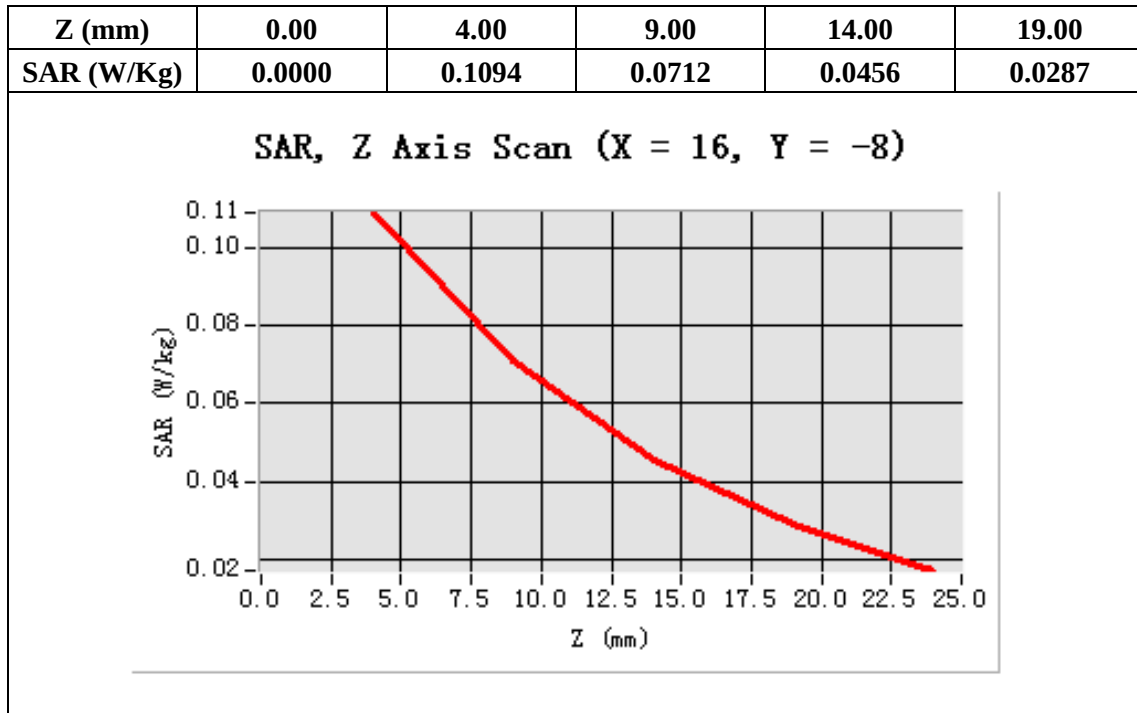

Test Laboratory: AGC Lab

Date: Jul 18,2012

PCS 1900 Mid-Body -Front (MS)

DUT: WCDMA MOBILE PHONE; Type: ANDROID 5100

Communication System: Generic GSM; Communication System Band: PCS 1900; Duty Cycle: 1:8.3;

Conv.F=6.42;Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 53.28$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section

Ambient temperature (°C): 21.0, Liquid temperature (°C): 21.0


Satimo Configuration:

- Probe:SSE5; Calibrated: 12/09/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM1; Type: SAM
- Measurement SW: OpenSAR V4_02_01

Configuration/PCS1900 Mid Body- Front /Area Scan: Measurement grid: dx=20mm, dy=20mm



Configuration/PCS1900 Mid Body- Front /Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

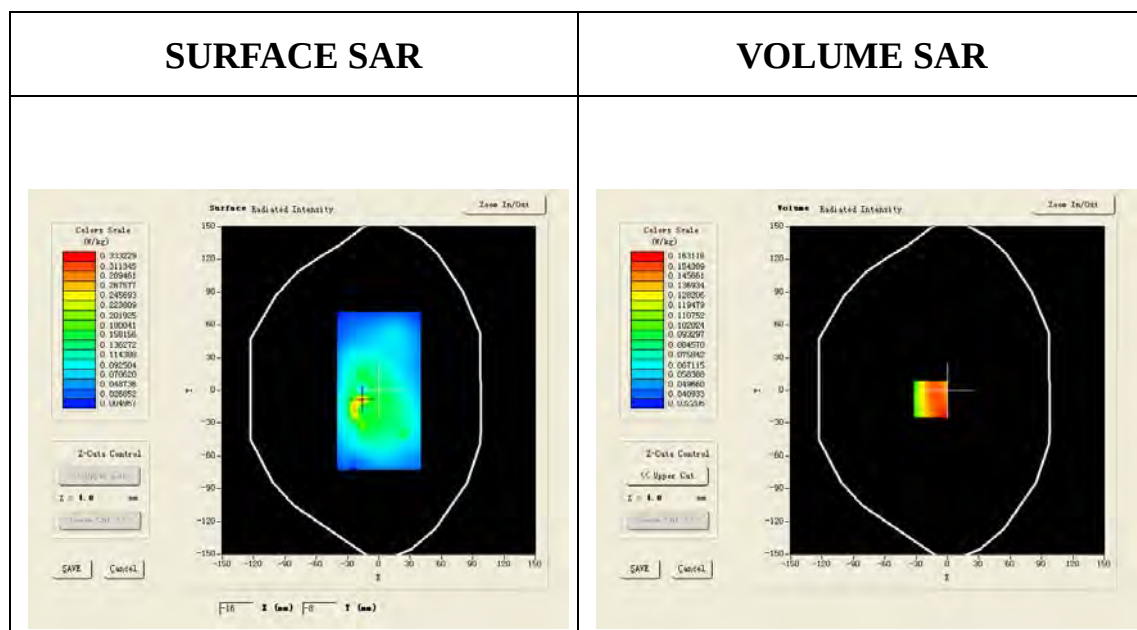

Maximum location: X=-16.00, Y=-8.00

SAR 10g (W/Kg)	0.117864
SAR 1g (W/Kg)	0.156545

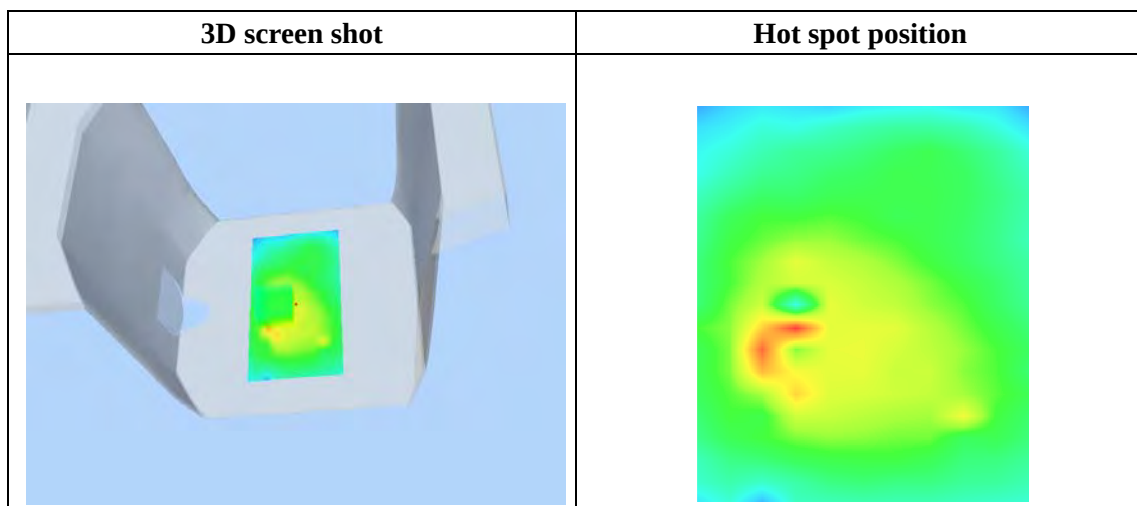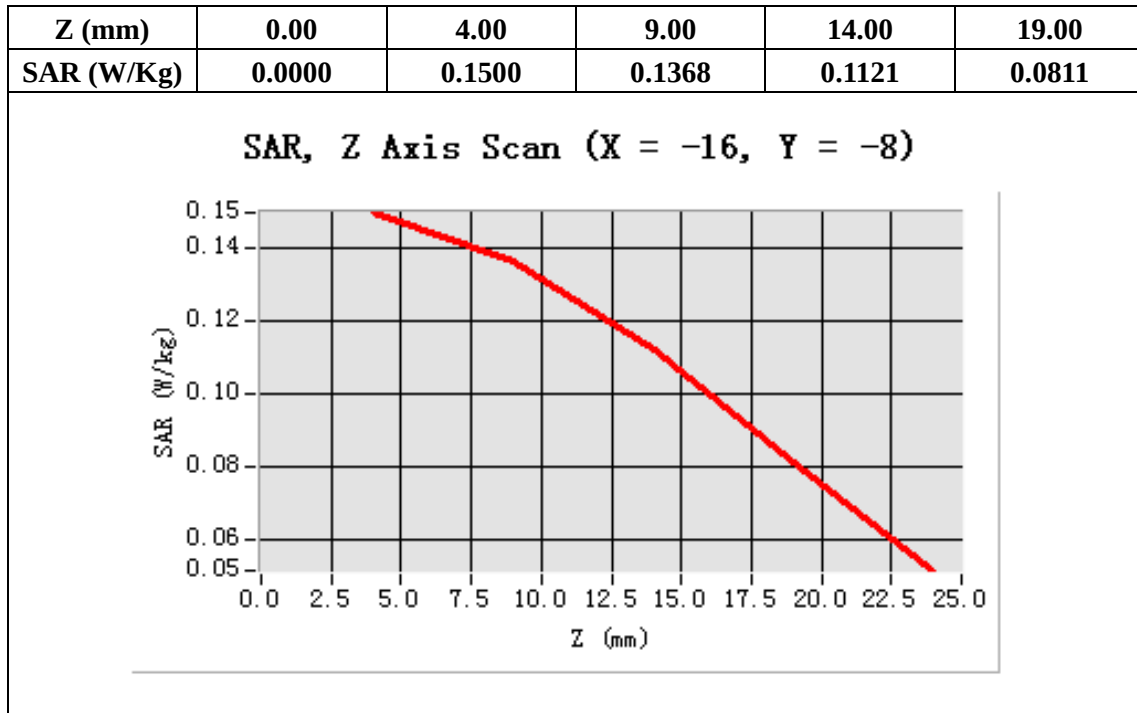

Test Laboratory: AGC Lab**Date: Jul 18,2012****PCS 1900 Mid-Body- Back (MS with earphone)****DUT: WCDMA MOBILE PHONE; Type: ANDROID 5100**

Communication System: Generic GSM; Communication System Band: PCS 1900; Duty Cycle: 1:8.3;

Conv.F=6.42;Frequency: 1880 MHz; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 53.28$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section


Ambient temperature (°C): 21.0, Liquid temperature (°C): 21.0

Satimo Configuration:

- Probe:SSE5; Calibrated: 12/09/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM1; Type: SAM
- Measurement SW: OpenSAR V4_02_01

Configuration/PCS1900 Mid Body-Back/Area Scan: Measurement grid: dx=20mm, dy=20mm**Configuration/PCS1900 Mid Body-Back/Zoom Scan: Measurement grid: dx=8mm, dy=8mm, dz=5mm;**

Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	Middle
Signal	TDMA (Crest factor: 8.0)

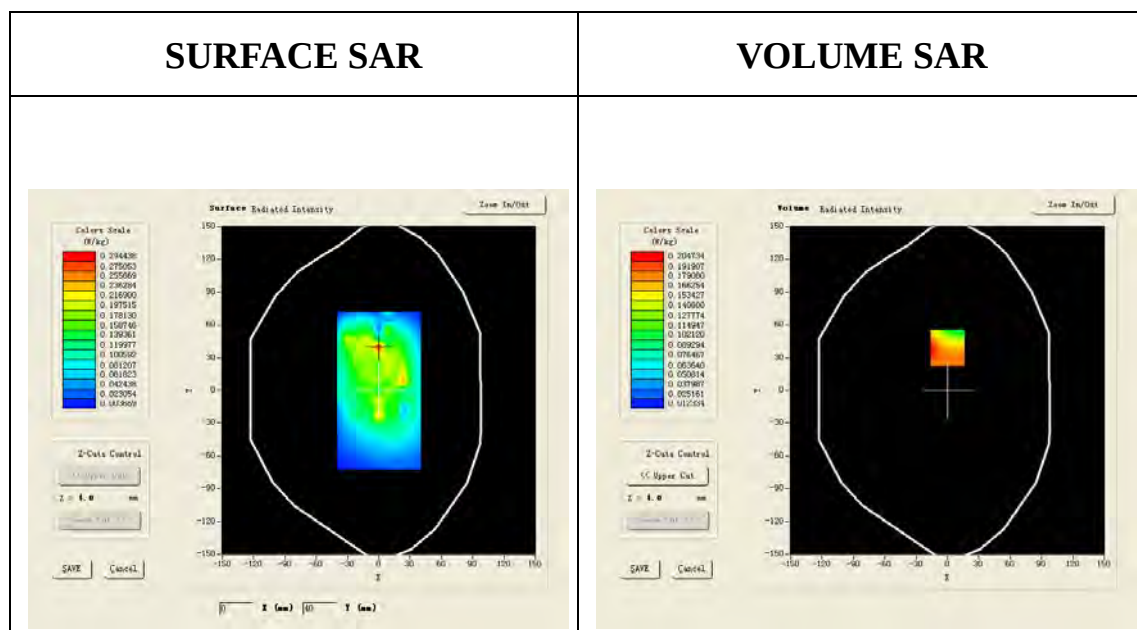**Maximum location: X=0.00, Y=39.00**

SAR 10g (W/Kg)	0.117276
SAR 1g (W/Kg)	0.185022

