



Engineering Solutions & Electromagnetic Compatibility Services

FCC Class 2 Permissive Change Report

Harris Corporation
221 Jefferson Ridge Parkway
Lynchburg, VA 24501

Model: XG-75 VHF Portable Radio

FCC ID: OWDTR-0059-E

August 29, 2013

Standards Referenced for this Report	
Part 2: 2012	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
Part 22: 2012	Public Portable Services
Part 90: 2012	Private Land Portable Radio Services
TIA-102.CCAA August 2011	Two-Slot Time Division Multiple Access Transceiver Measurement Methods
TIA-102.CCAB October 2011	Two - Slot Time Division Multiple Access Transceiver Performance Recommendations
TIA-EIA-603-C August 2004	Land Portable FM or PM Communications Equipment – Measurement and Performance Standards

Frequency Range (MHz)	Rated Transmit Power (W) (Conducted)	Frequency Tolerance (ppm)	Mode	Emission Designator
136-174	6.0	2.5	Voice NB	11K0F3E
136-174	6.0	2.5	2 level NB 9600	10K8F1D
136-174	6.0	2.5	2 level NB 9600	10K8F1E
136-174	6.0	2.5	2 level NB 4800	7K80F1D
136-174	6.0	2.5	2 level NB 4800	7K80F1E
136-174	6.0	2.5	P25	8K40F1D
136-174	6.0	2.5	P25	8K40F1E
136-174	6.0	2.5	H-CPM TDMA	8K10DXW

Report Prepared By: Daniel Baltzell

Document Number: 2013115

This report may not be reproduced, except in full, without the full written approval of Rhein Tech Laboratories, Inc. and Harris Corporation. Test results relate only to the item tested.

These tests are accredited and meet the requirements of ISO/IEC 17025 as verified by ANSI-ASQ National Accreditation Board/ACLASS. Refer to certificate and scope of accreditation AT-1445.

Table of Contents

1	Test Result Summary	4
2	General Information	4
2.1	Test Facility	4
2.2	Related Submittal(s)/Grant(s)	4
2.3	Grant Notes	4
2.4	Tested System Details	4
3	FCC §2.1046(a): Peak Output Power	6
3.1	Test Procedure.....	6
3.2	Test Data.....	6
4	FCC §2.1051: Conducted Spurious Emissions	7
4.1	Test Procedure.....	7
4.2	Test Data.....	7
5	FCC §2.1049(c)(1); §22.359(b): Emission Limitations	8
5.1	Test Procedure.....	8
5.2	Test Data.....	9
6	FCC §2.1053(a): Field Strength of Spurious Radiation; CFR 47 §22.359: Emissions Limitations ...	24
6.1	Test Procedure.....	24
6.2	Test Data.....	24
7	Conclusion	26

Table of Figures

Figure 2-1: Configuration of Tested System.....	5
---	---

Table of Tables

Table 2-1: Equipment Under Test (EUT).....	4
Table 3-1: RF Power Output: Modulated Carrier Output Power	6
Table 3-2: RF Power Output (Rated Power)	6
Table 3-3: Test Equipment Used for Testing RF Power Output – Conducted	6
Table 4-1: Test Equipment Used for Testing Spurious Emissions.....	7
Table 5-1: Test Equipment Used for Testing Occupied Bandwidth	23
Table 6-1: Field Strength of Spurious Radiation – 152.015 MHz.....	24
Table 6-2: Field Strength of Spurious Radiation – 158.71 MHz.....	25
Table 6-3: Test Equipment Used for Testing Field Strength of Spurious Radiation	25

Table of Plots

Plot 5-1: Occupied Bandwidth – NB Analog	9
Plot 5-2: Occupied Bandwidth – CP/M TDMA	10
Plot 5-3: Occupied Bandwidth – 2 Level NB 9600 FSK	11
Plot 5-4: Occupied Bandwidth – 2 Level NB 4800 FSK	12
Plot 5-5: Occupied Bandwidth – P25.....	13
Plot 5-6: Occupied Bandwidth – 152.015 MHz; Mask; H-CPM TDMA.....	14
Plot 5-7: Occupied Bandwidth – 158.710 MHz; Mask; H-CPM TDMA.....	15
Plot 5-8: Occupied Bandwidth – 152.015 MHz; Mask; NB Analog Voice.....	16
Plot 5-9: Occupied Bandwidth – 158.710 MHz; Mask; NB Analog Voice.....	17
Plot 5-10: Occupied Bandwidth – 152.015 MHz; Mask; 2 Level NB 4800 FSK	18
Plot 5-11: Occupied Bandwidth – 158.710 MHz; Mask; 2 Level NB 4800 FSK	19
Plot 5-12: Occupied Bandwidth – 152.015 MHz; Mask; P25.....	20
Plot 5-13: Occupied Bandwidth – 158.710 MHz; Mask; P25.....	21
Plot 5-14: Occupied Bandwidth – 152.015 MHz; Mask; 2 Level NB 9600 FSK	22
Plot 5-15: Occupied Bandwidth – 158.710 MHz; Mask; 2 Level NB 9600 FSK	23

Table of Appendixes

Appendix A: Description of Change.....	27
Appendix B: Agency Authorization Letter	28
Appendix C: Extended Frequency Attestation	29
Appendix D: Test Configuration Photographs	30

Table of Photographs

Photograph 1: Radiated TX Spurious Emissions – Front View	30
Photograph 2: Radiated TX Spurious Emissions – Rear View.....	31

1 Test Result Summary

Test	FCC Reference	Result
RF Power Output	2.1046(a), 22.659	Complies
Spurious Emissions at Antenna Terminals	2.1046(a), 22.359	Complies
Occupied Bandwidth/Emission Masks	2.1049(c)(1), 22.359(b)	Complies

2 General Information

The following Class 2 Permissive Change Report is prepared on behalf of Harris Corporation in accordance with the Federal Communications Commission rules and regulations. The Equipment Under Test (EUT) was XG-75 VHF Portable Radio; FCC ID: OWDTR-0059-E.

The purpose of this Class 2 Permissive Change is to add Part 22 operations.

All measurements contained in this application were conducted in accordance with the applicable sections of FCC Rules and Regulations CFR 47 Parts 2 and 22. Calibration checks are performed regularly on the instruments, and all accessories including high pass filter, coaxial attenuator, preamplifier and cables.

2.1 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the parking lot of Rhein Tech Laboratories, Inc. 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report submitted to, and approved by, the Federal Communications Commission to perform AC line conducted and radiated emissions testing.

2.2 Related Submittal(s)/Grant(s)

The original FCC certification was granted on September 12, 2011; a Class 2 permissive change grant was issued on April 18, 2013.

2.3 Grant Notes

Power is continuously variable from 0.5 - 6 W. The grant listed power is rated power.

2.4 Tested System Details


The test sample was received on March 15, 2013. Listed below are the identifiers and descriptions of all equipment, cables, and internal devices used with the EUT for this test, as applicable.

The device was programmed for multiple test patterns. All test patterns were investigated and found to be nearly identical from an emissions perspective. Modes for Part 22 operation were provided.

Table 2-1: Equipment Under Test (EUT)

Part	Manufacturer	Model	PN/SN	FCC ID	RTL Bar Code
VHF Radio	Harris Corporation	XG-75	A40125000095	OWDTR-0059-E	20873

Figure 2-1: Configuration of Tested System

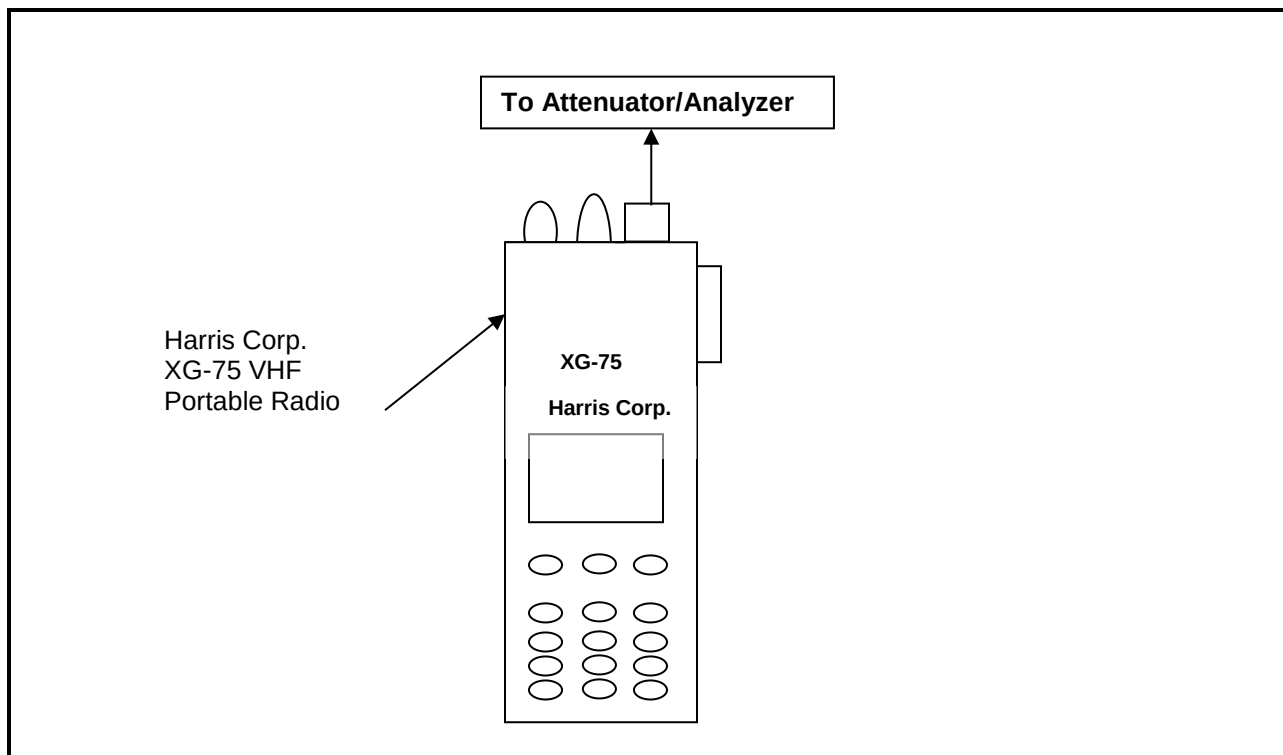

3 FCC §2.1046(a): Peak Output Power

3.1 Test Procedure

TIA-102.CCAA August 2011, section 2.2.1, TIA-102.CCAB October 2011, section 3.2.1

The EUT was connected via an appropriate 50 ohm attenuator to a signal analyzer. The attenuator loss was used as an analyzer offset.

3.2 Test Data

Table 3-1: RF Power Output: Modulated Carrier Output Power

Frequency (MHz)	High Power (dBm)	High Power (W)
136.0125	38.1	6.5
152.015	38.0	6.3
154.0125	37.9	6.2
158.710	37.9	6.2
173.0125	37.9	6.2

Table 3-2: RF Power Output (Rated Power)

Frequency (MHz)	High Power Rated (W)
136-174	6.0

Table 3-3: Test Equipment Used for Testing RF Power Output – Conducted

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901583	Agilent Technologies	N9010A	EXA Signal Analyzer (10 Hz-26.5 GHz)	MY51250846	4/16/14
901139	Weinschel Corp.	48-20-34 DC-18GHz	Attenuator, 100W 20 dB	BK5859	3/25/16

Test Personnel:

Daniel Baltzell
EMC Test Engineer



Signature

August 8, 2013
Date of Test

4 FCC §2.1051: Conducted Spurious Emissions

4.1 Test Procedure

TIA-102.CCAA August 2011, section 2.2.7, TIA-102.CCAB October 2011, section 3.2.7

The transmitter was interfaced with a spectrum analyzer through an appropriate 50 ohm attenuator. The transmitter was operated at maximum power. Attenuator losses were accounted for.

4.2 Test Data

Frequency range of measurement per Part 2.1057: 9 kHz to 10x F_c .

The worst case (unwanted emissions) channels are shown. Per FCC 2.1051, the magnitude of emissions attenuated more than 20 dB below the FCC limit need not be recorded.

No spurious emissions were found to be within 20 dB of the limit; therefore, no data is reported.

Table 4-1: Test Equipment Used for Testing Spurious Emissions

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901583	Agilent Technologies	N9010A	EXA Signal Analyzer (10 Hz-26.5 GHz)	MY51250846	4/16/14
901139	Weinschel Corp.	48-20-34 DC-18GHz	Attenuator, 100W 20 dB	BK5859	3/25/16

Test Personnel:

Daniel Baltzell
EMC Test Engineer



Signature

August 8, 2013
Date of Test

5 FCC §2.1049(c)(1); §22.359(b): Emission Limitations

5.1 Test Procedure

ANSI TIA-603-C-2004, Section 2.2.11, TIA-102.CCAA August 2011, section 2.2.5, TIA-102.CCAB October 2011, section 3.2.5


The transmitter was interfaced with a spectrum analyzer through an appropriate 50 ohm attenuator and a notch filter. The transmitter was operated at maximum power. Attenuator losses were accounted for.

§22.359(a) *Out of band emissions*. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.


(b) *Measurement procedure*: In the 60 kHz bands immediately outside and adjacent to the authorized frequency range or channel, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e., 30 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

5.2 Test Data


Plot 5-1: Occupied Bandwidth – NB Analog

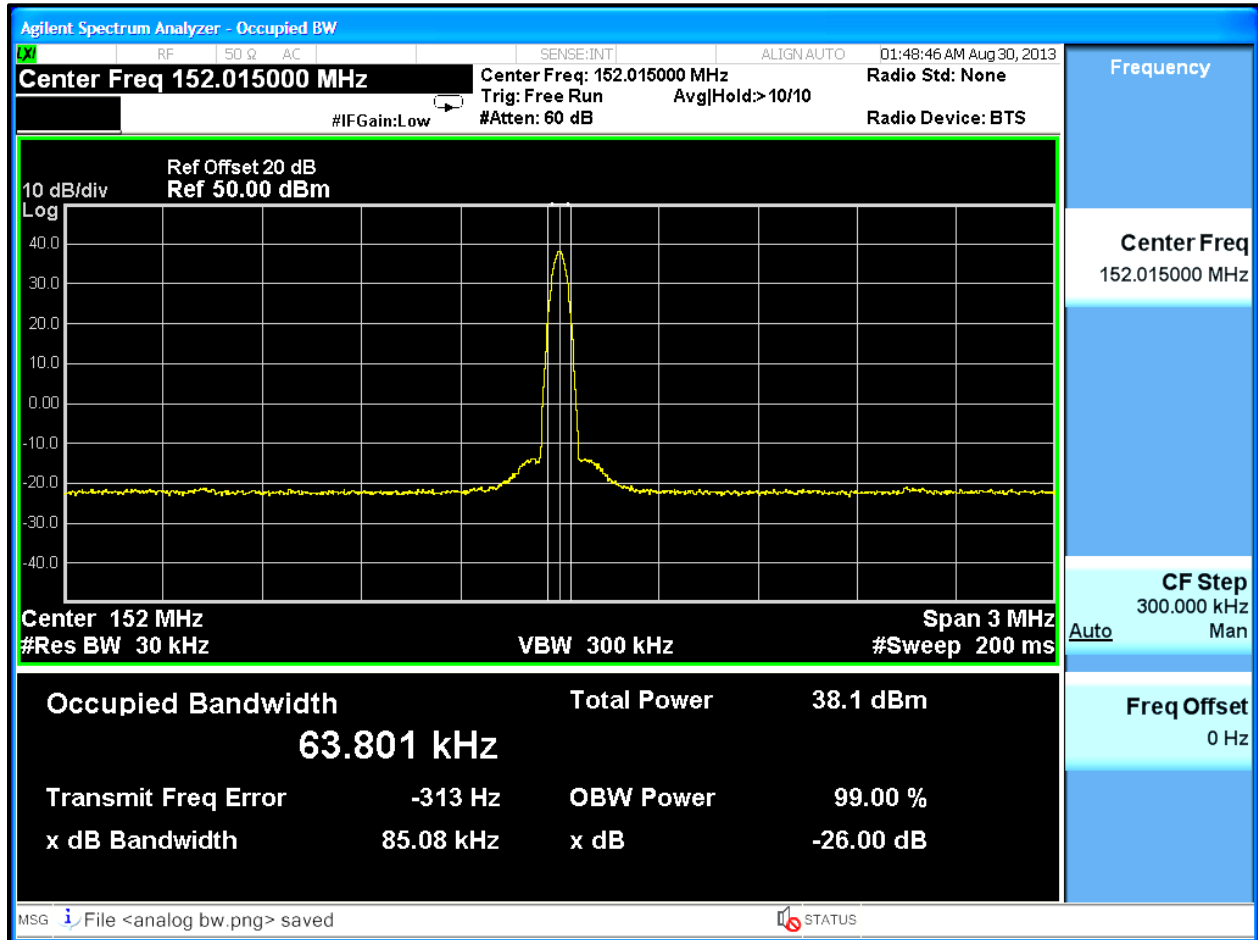


Plot 5-2: Occupied Bandwidth – CP/M TDMA

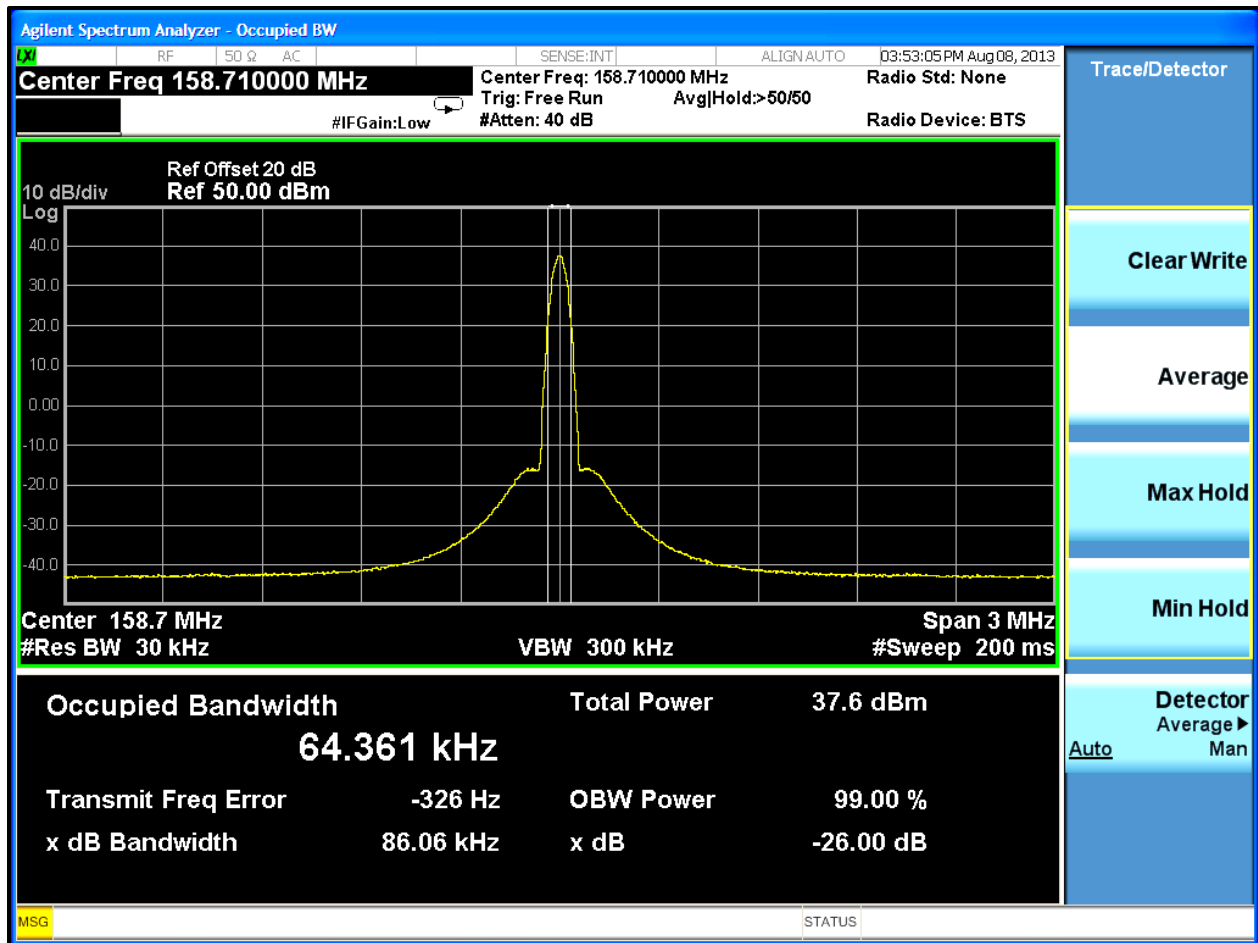


Plot 5-3: Occupied Bandwidth – 2 Level NB 9600 FSK

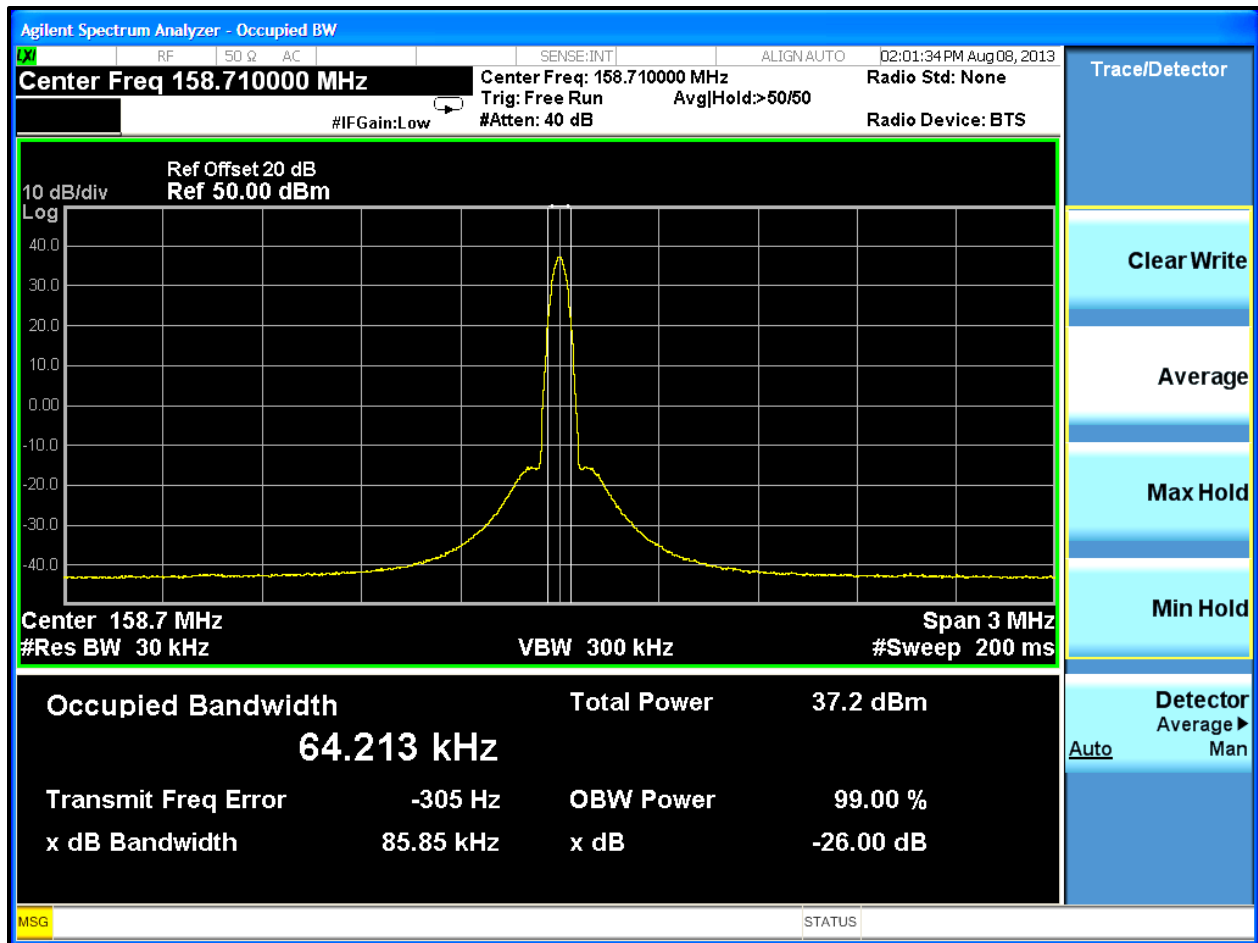


Plot 5-4: Occupied Bandwidth – 2 Level NB 4800 FSK

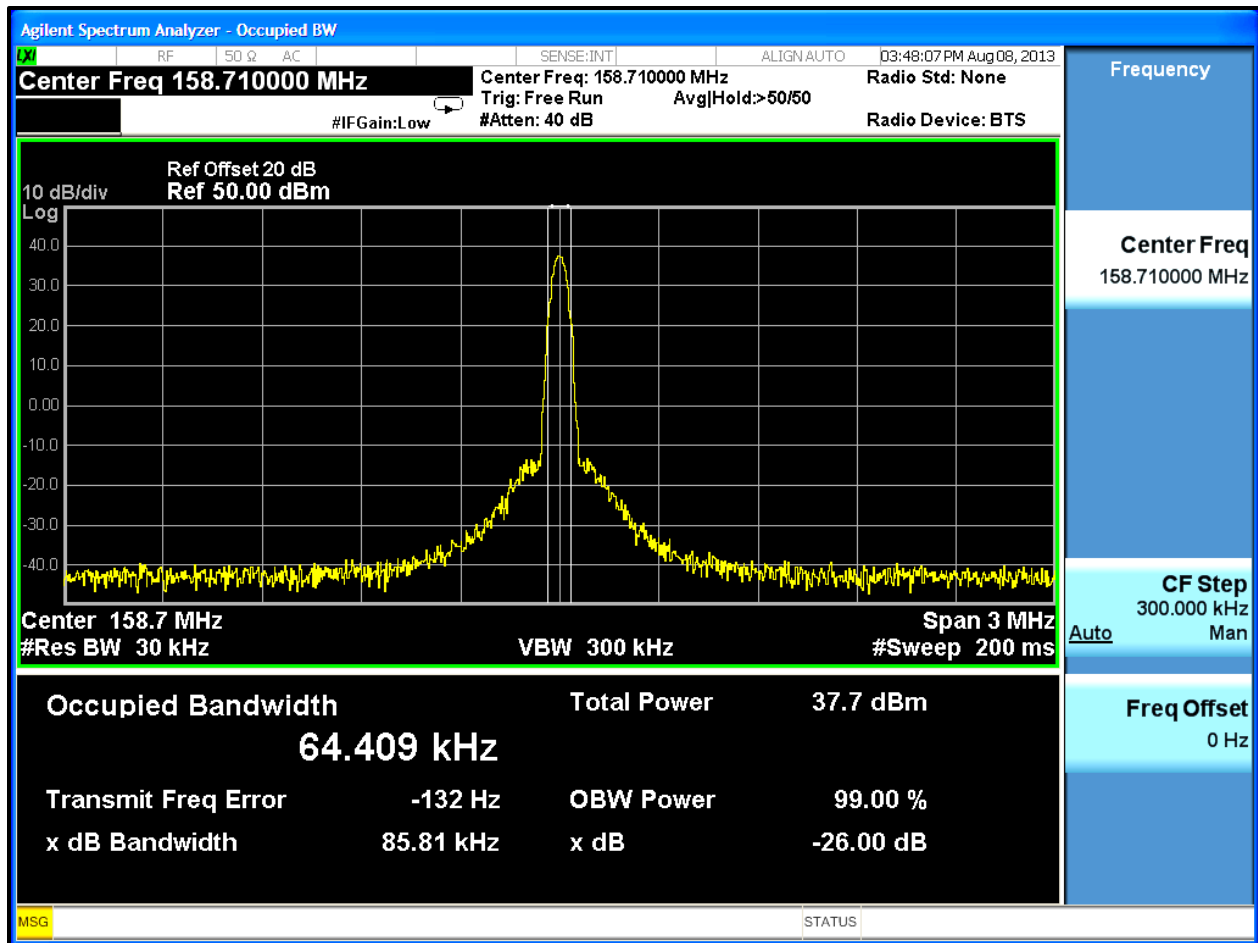


Plot 5-5: Occupied Bandwidth – P25

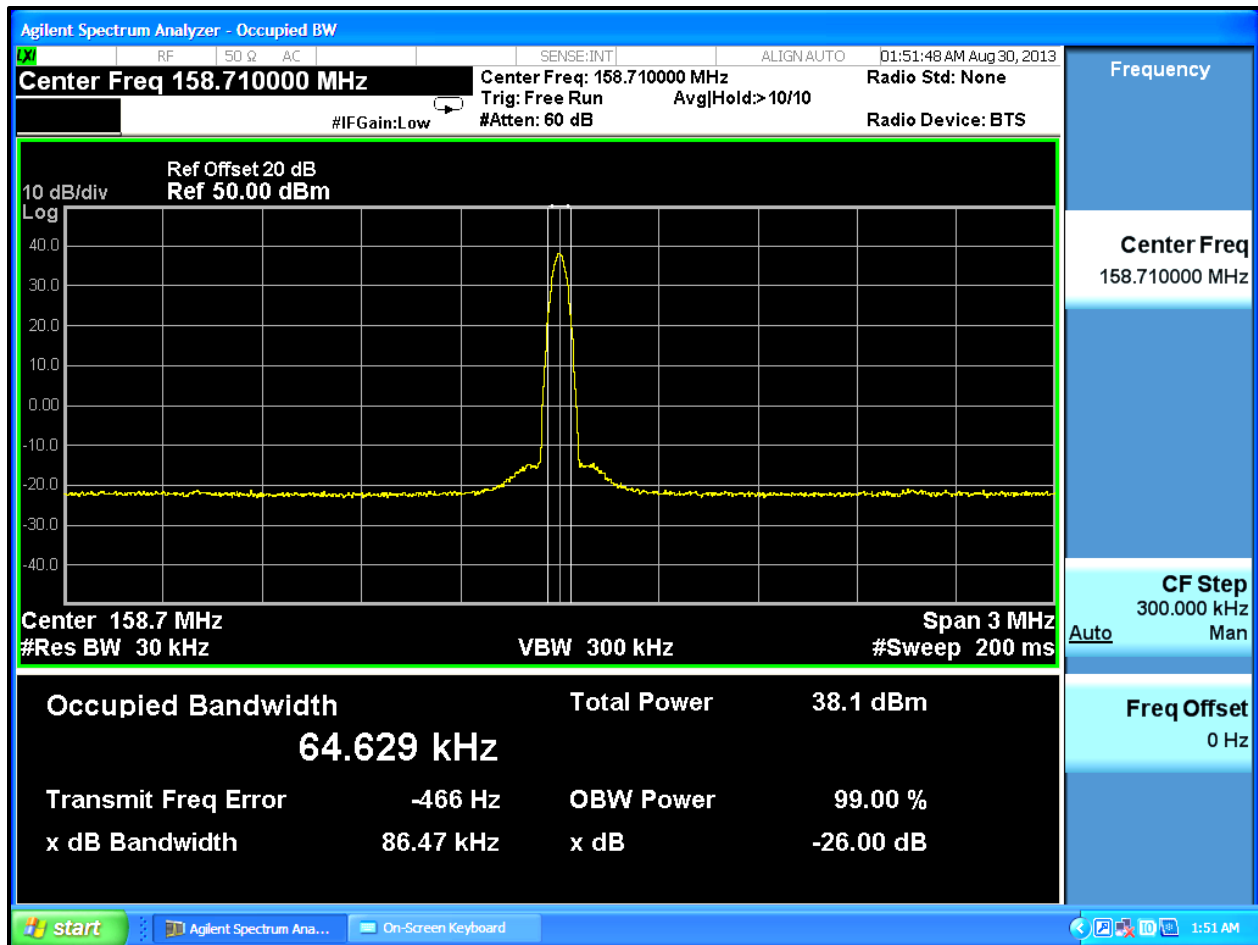


Plot 5-6: Occupied Bandwidth – 152.015 MHz; Mask; H-CPM TDMA

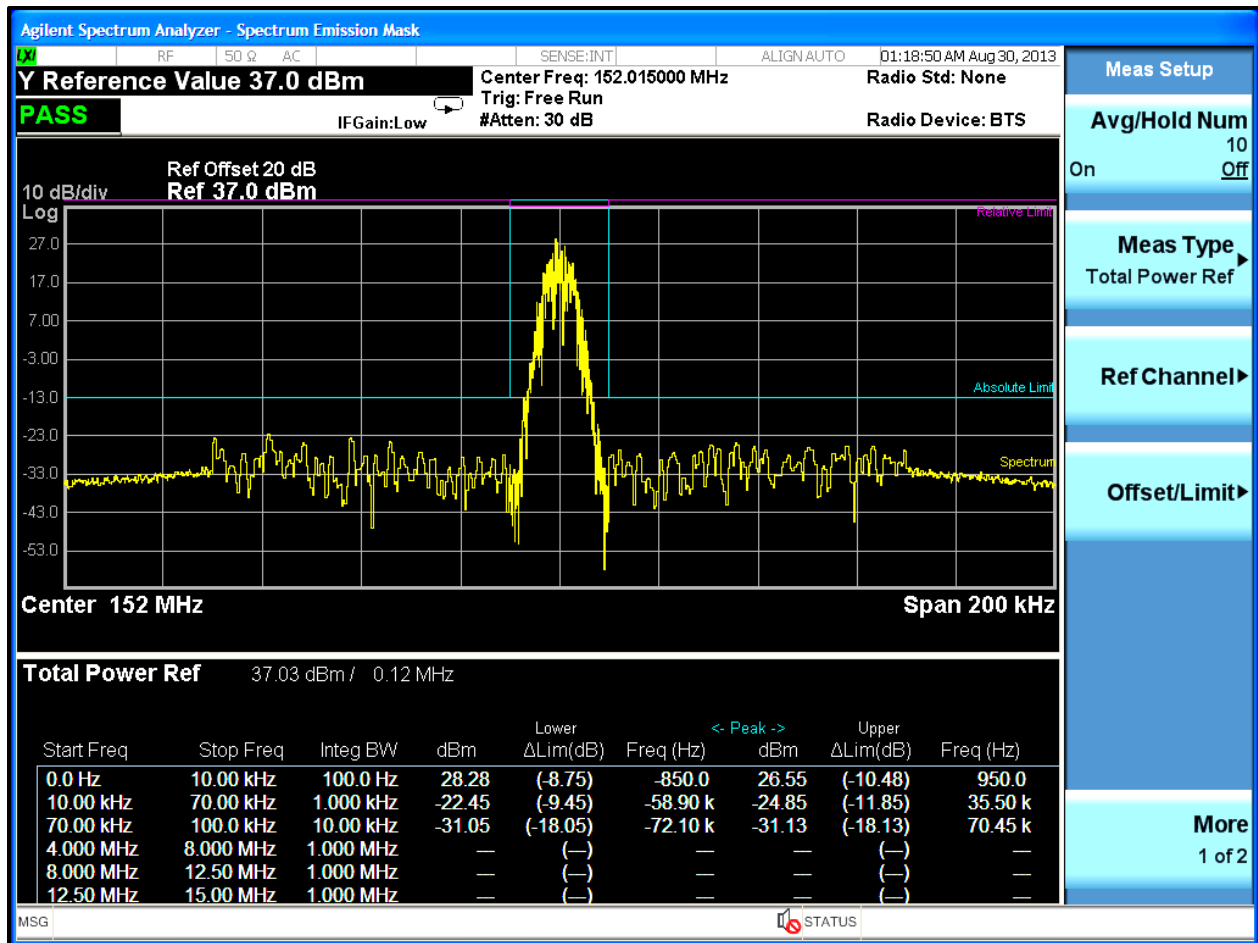


Plot 5-7: Occupied Bandwidth – 158.710 MHz; Mask; H-CPM TDMA

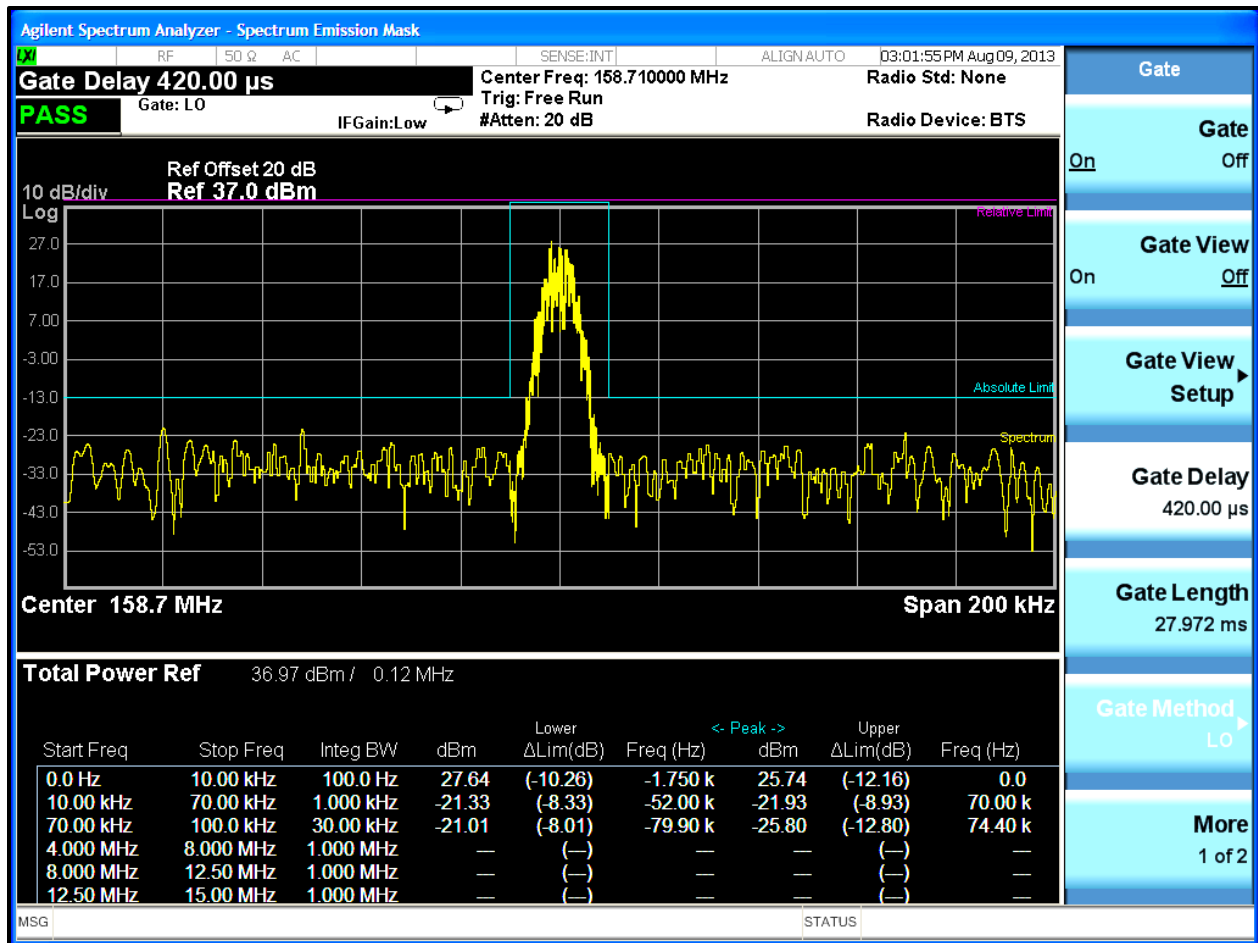


Plot 5-8: Occupied Bandwidth – 152.015 MHz; Mask; NB Analog Voice

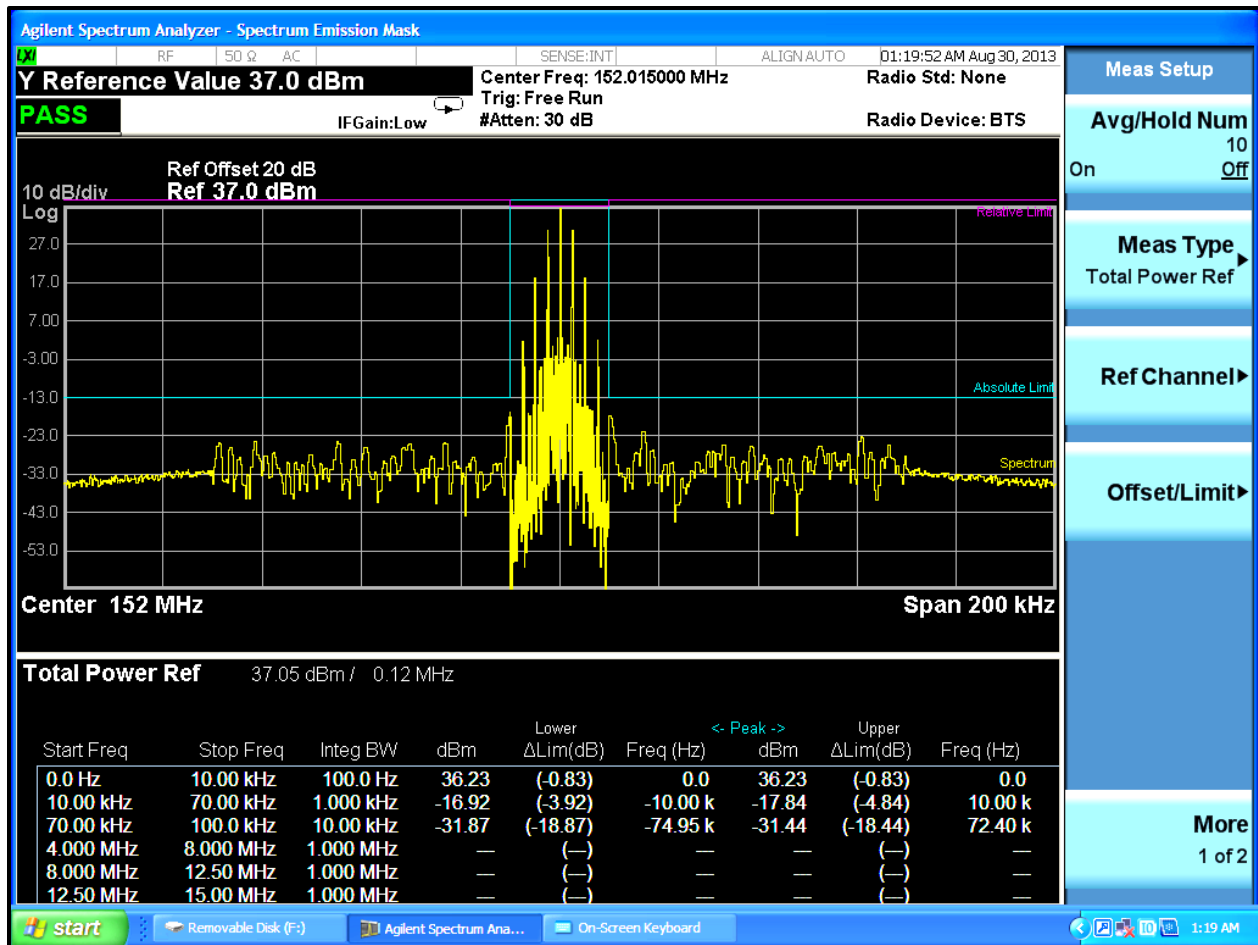


Plot 5-9: Occupied Bandwidth – 158.710 MHz; Mask; NB Analog Voice

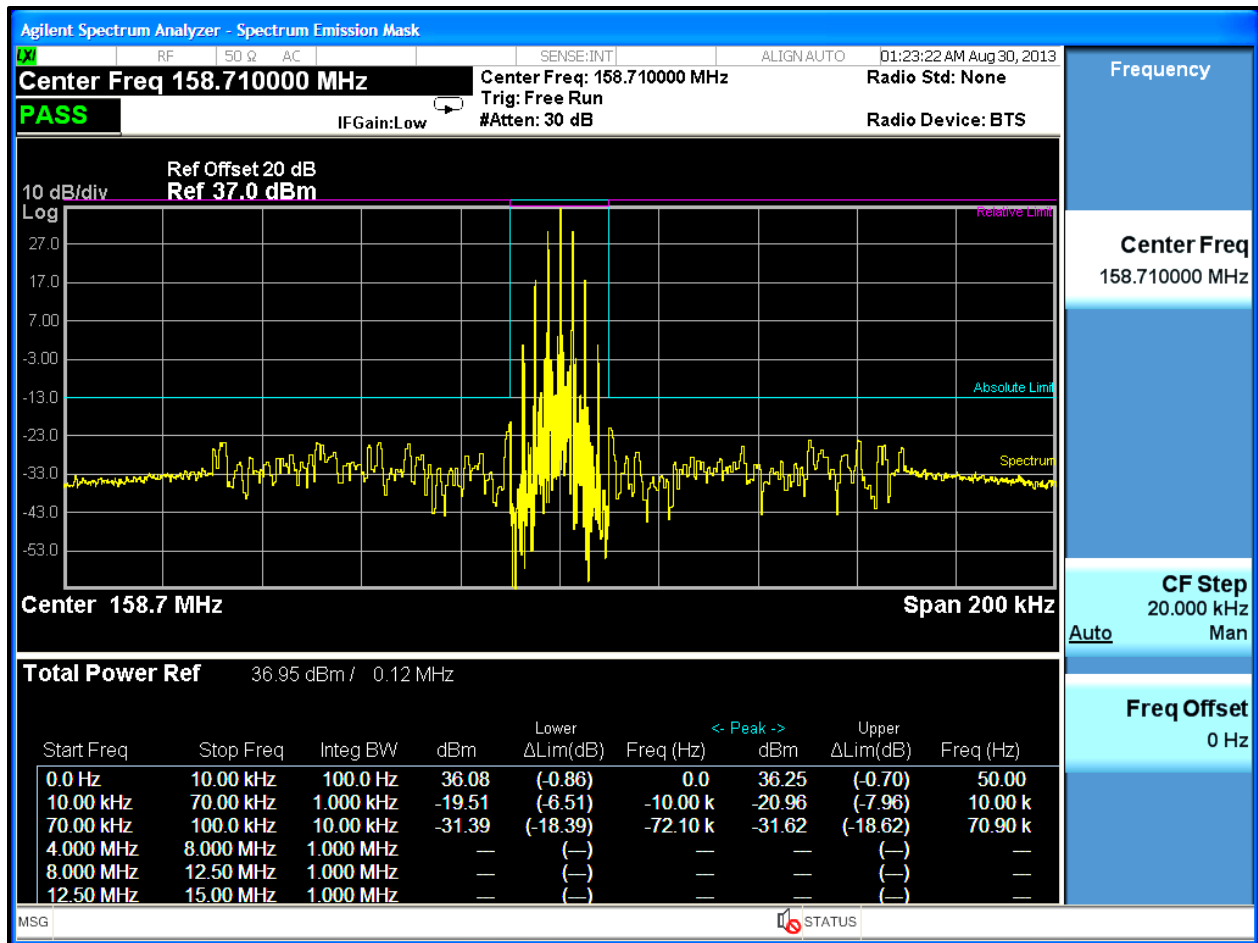


Plot 5-10: Occupied Bandwidth – 152.015 MHz; Mask; 2 Level NB 4800 FSK

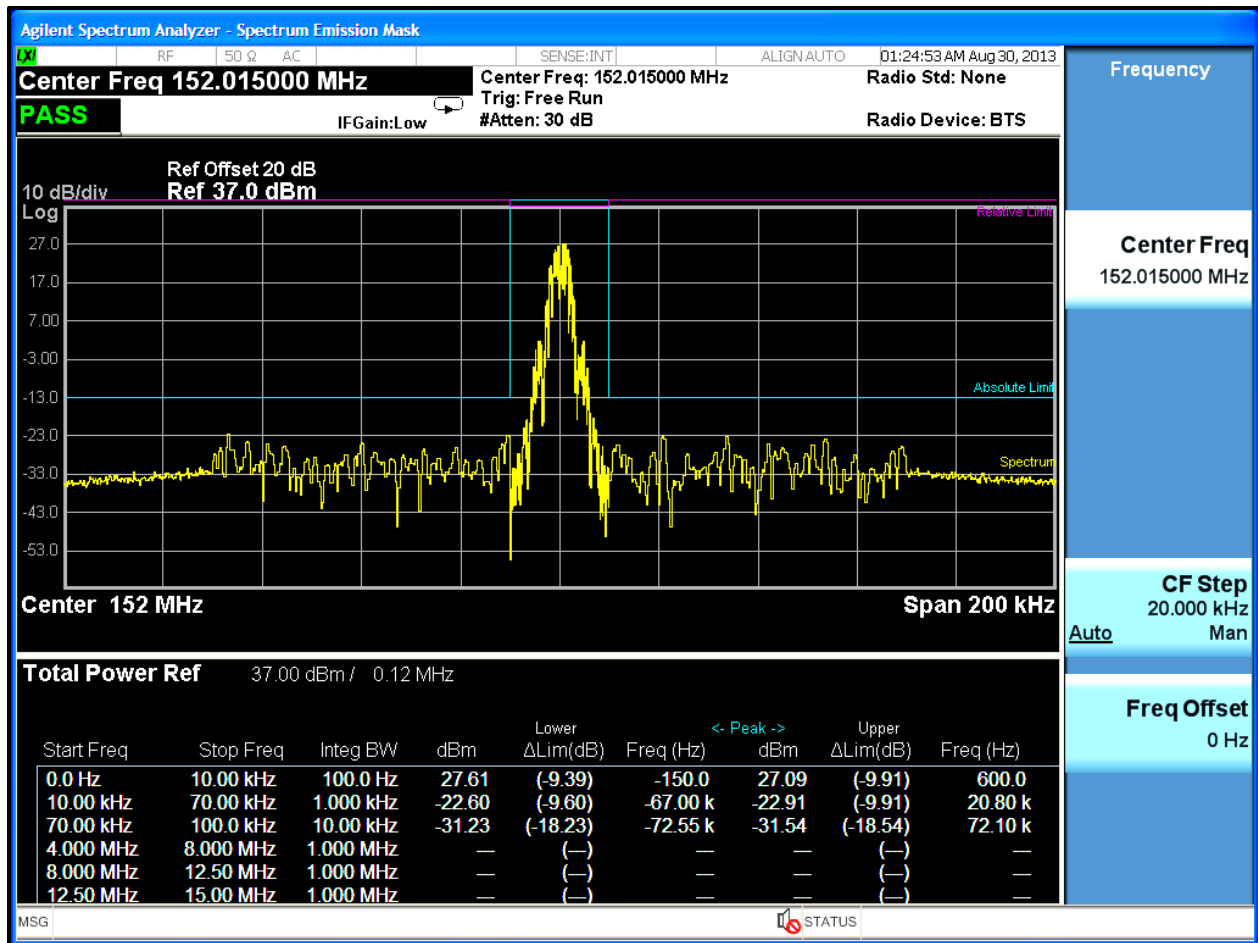


Plot 5-11: Occupied Bandwidth – 158.710 MHz; Mask; 2 Level NB 4800 FSK

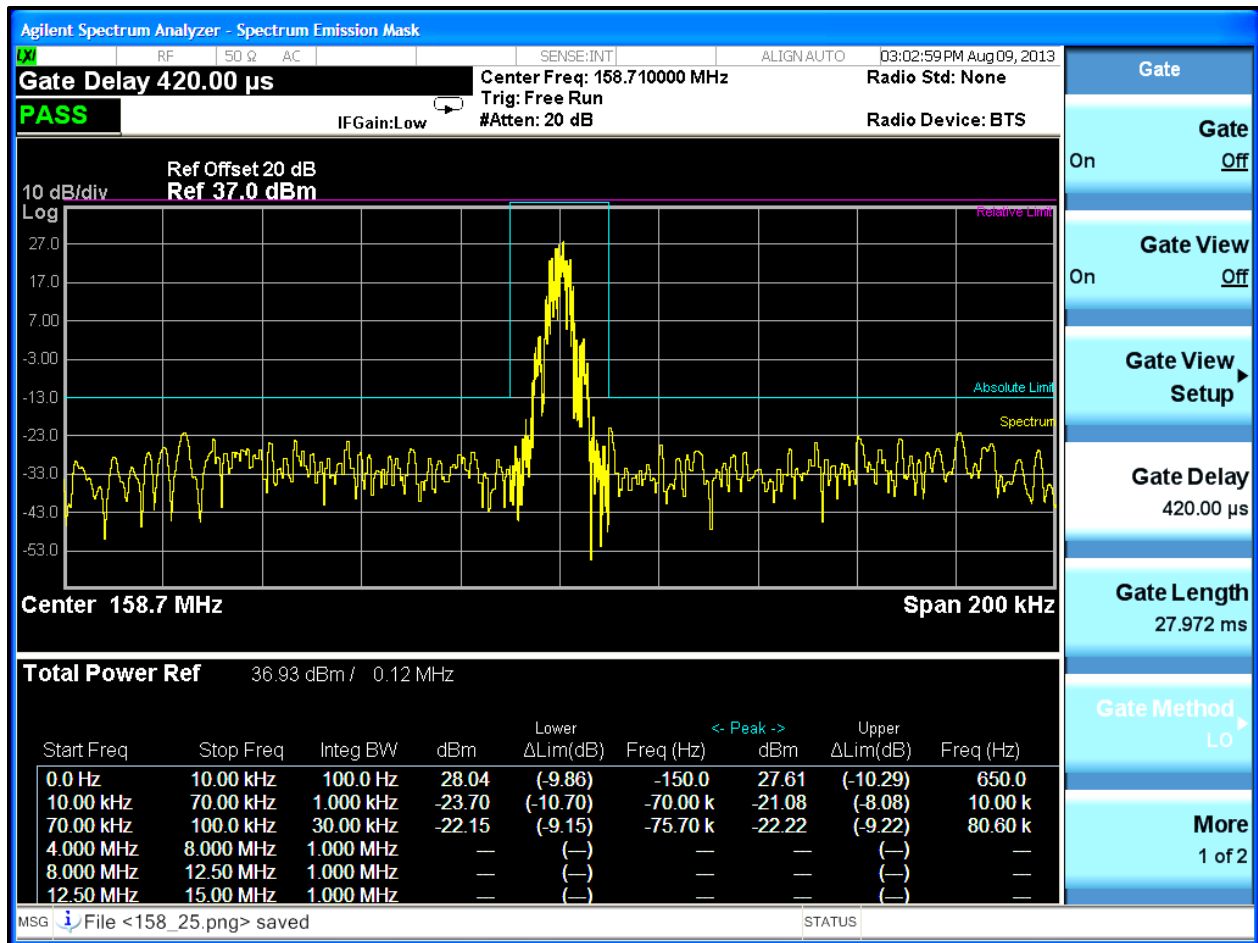


Plot 5-12: Occupied Bandwidth – 152.015 MHz; Mask; P25

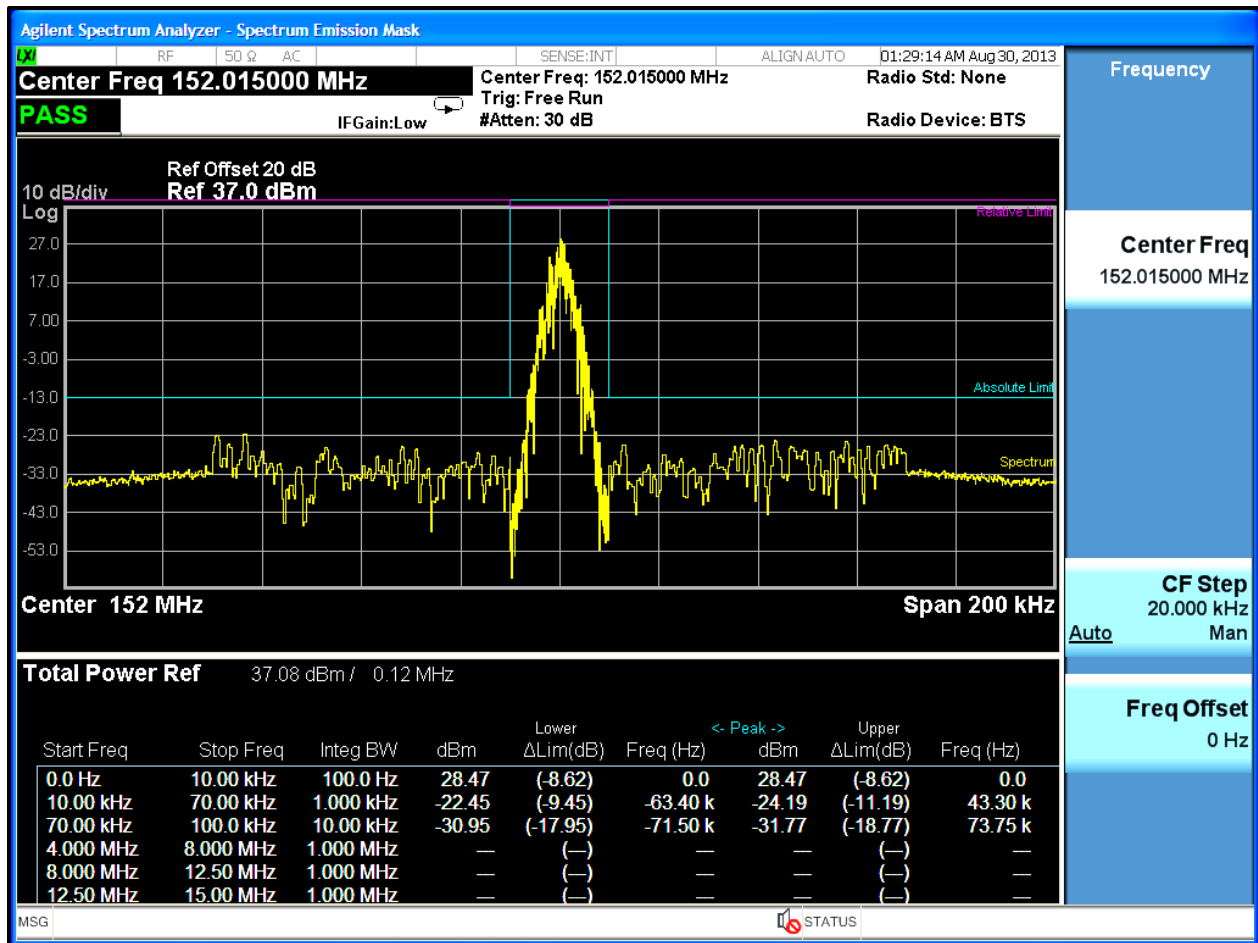

Plot 5-13: Occupied Bandwidth – 158.710 MHz; Mask; P25

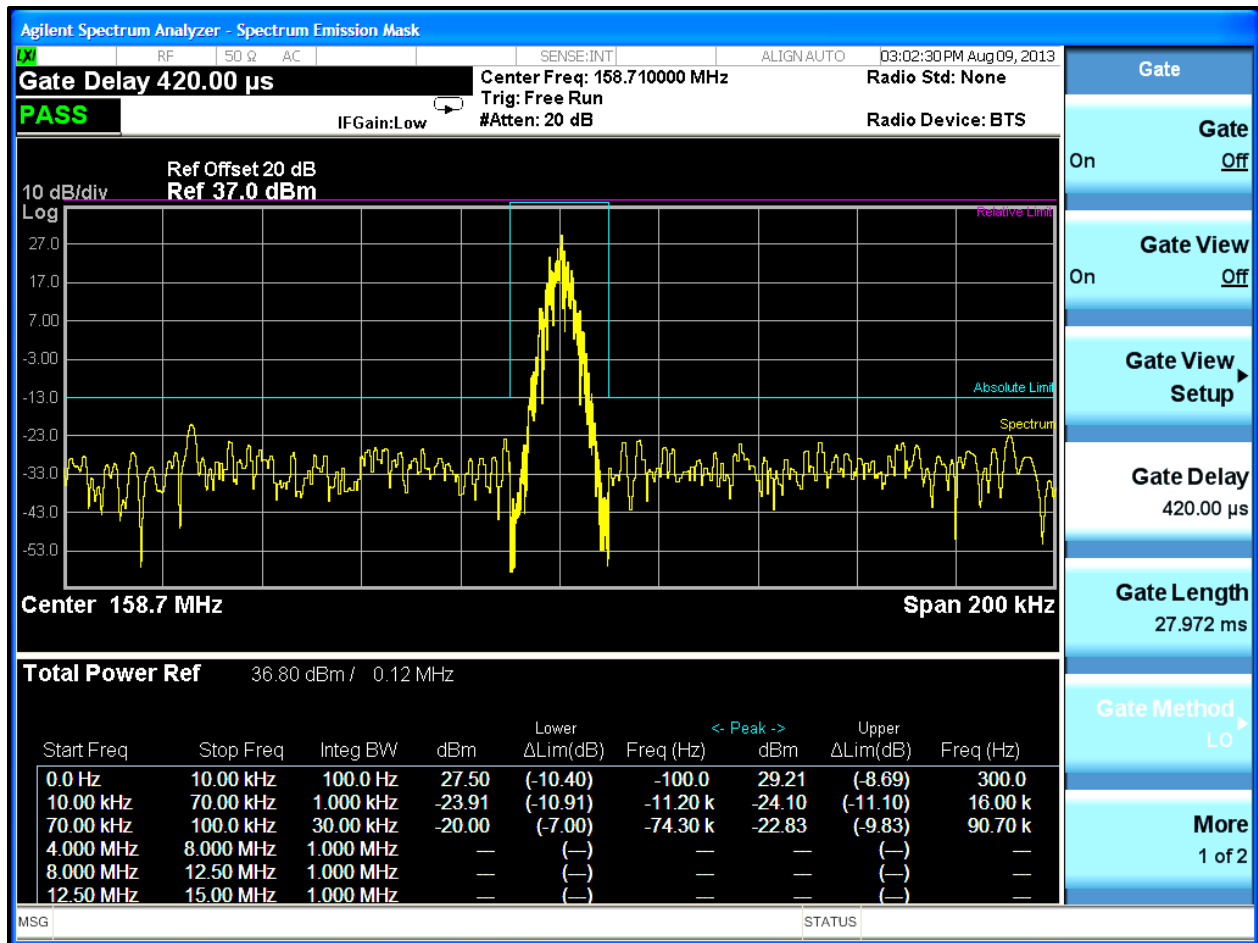

Plot 5-14: Occupied Bandwidth – 152.015 MHz; Mask; 2 Level NB 9600 FSK

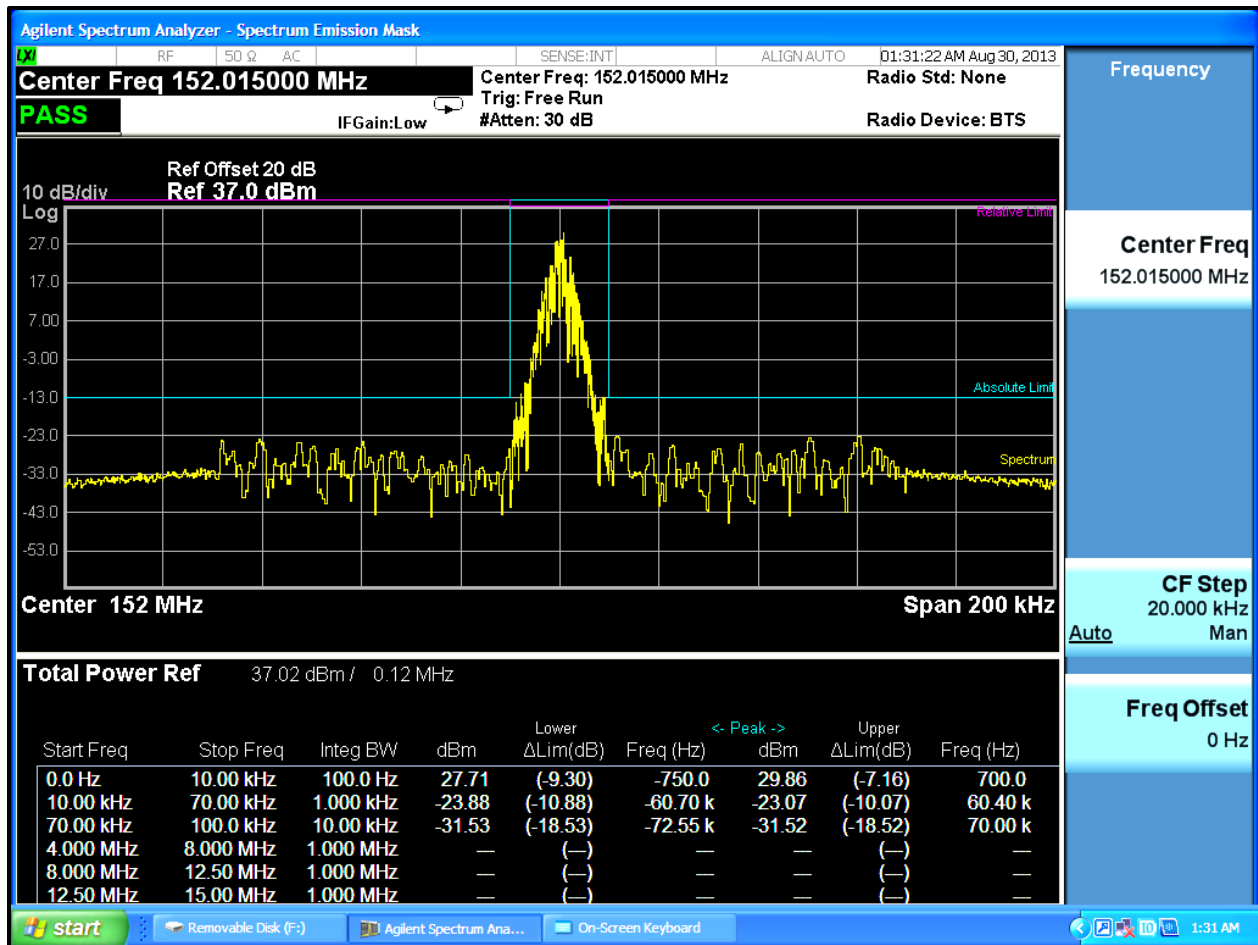

Plot 5-15: Occupied Bandwidth – 158.710 MHz; Mask; 2 Level NB 9600 FSK

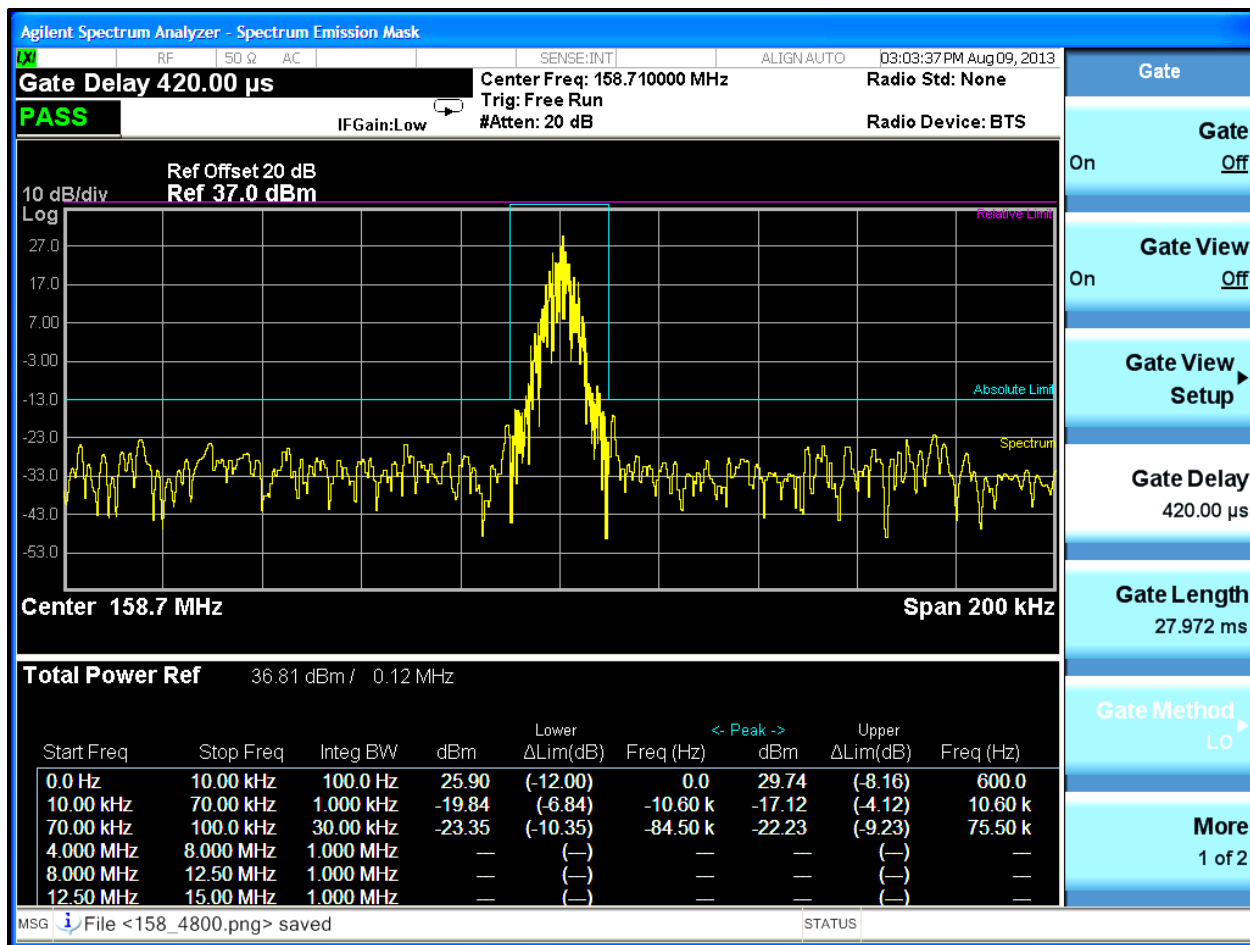


Table 5-1: Test Equipment Used for Testing Occupied Bandwidth

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901583	Agilent Technologies	N9010A	EXA Signal Analyzer (10 Hz-26.5 GHz)	MY51250846	4/16/14
901139	Weinschel Corp.	48-20-34 DC-18GHz	Attenuator, 100W 20 dB	BK5859	3/25/16

Test Personnel:

Daniel Baltzell
Test Engineer

Daniel W. Baltzell

Signature

August 8 & 29, 2013
Dates of Test

6 FCC §2.1053(a): Field Strength of Spurious Radiation; CFR 47 §22.359: Emissions Limitations

6.1 Test Procedure

ANSI TIA-603-C-2004, Section 2.2.12

Analog Modulation: The transmitter is terminated with a 50 ohm load and is modulated with a 2,500 Hz sine wave at an input level 16 dB greater than that required to produce 50% of the rated system deviation at 1,000 Hz.

The spurious emissions levels were measured and the device under test was replaced by a substitution antenna connected to a signal generator. This signal generator level was then corrected by subtracting the cable loss from the substitution antenna to the signal generator, and the gain of the antenna was further corrected to a half wave dipole.

$$P_d(\text{dBm}) = P_g(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

where: P_d is the dipole equivalent power; P_g is the generator output power into the substitution antenna

6.2 Test Data

Limit = 43 + 10 Log (P) dB or 70 dB, whichever is greater. The worst case emissions test data are shown

The EUT transmitting at high power was determined to be the worst case emissions level and is reported in the following tables.

Table 6-1: Field Strength of Spurious Radiation – 152.015 MHz

51 dBc = Limit

Frequency (MHz)	Measured Level (dBuv)	Signal Gen. Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd)	Corrected Level (dBc)	Margin (dB)
304.030	89.8	-34.5	0.2	1.4	84.2	-33.2
456.045	90.7	-31.7	0.2	1.7	81.2	-30.2
608.060	73.9	-45.2	0.2	1.3	95.1	-44.1
760.075	57.6	-58.3	0.2	0.9	108.7	-57.7
912.090	54.4	-62.4	0.3	0.9	112.7	-61.7
1064.105	68.7	-47.7	0.3	3.0	96.0	-45.0
1216.120	38.7	-77.3	0.3	3.3	125.3	-74.3
1368.135	53.9	-61.7	0.3	4.6	108.5	-57.5
1520.150	31.8	-83.4	0.4	5.6	129.1	-78.1

Table 6-2: Field Strength of Spurious Radiation – 158.71 MHz

50.9 dBc = Limit


Frequency (MHz)	Measured Level (dBuv)	Signal Gen. Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd)	Corrected Level (dBc)	Margin (dB)
317.420	90.2	-34.3	0.2	1.5	83.9	-33.0
476.130	92.7	-29.3	0.2	1.6	78.8	-27.9
634.840	55.4	-63.2	0.2	1.3	113.0	-62.1
793.550	66.2	-50.7	0.2	0.7	101.2	-50.3
952.260	54.1	-62.6	0.3	1.2	112.5	-61.6
1110.970	57.8	-58.5	0.3	2.9	106.8	-55.9
1269.680	44.1	-71.7	0.3	3.9	119.0	-68.1
1428.390	39.2	-76.2	0.3	4.9	122.5	-71.6
1587.100	38.4	-76.6	0.4	6.6	121.3	-70.4

Table 6-3: Test Equipment Used for Testing Field Strength of Spurious Radiation

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900791	Chase	CBL6111B	Bilog Antenna (30 MHz–2000 MHz)	N/A	1/31/14
901583	Agilent Technologies	N9010A	EXA Signal Analyzer (10 Hz-26.5 GHz)	MY51250846	4/16/14
900905	Rhein Tech Laboratories	PR-1040	OATS 1 Preamplifier 40dB (30 MHz–2 GHz)	1006	8/20/13
901158	Compliance Design, Inc.	Roberts Dipole Antenna	Adjustable Elements Dipole 25-1000 MHz Antennas	00401	3/6/14
901262	ETS	3160-9	Double ridged Guide Antenna (1-18 GHz)	6748	5/11/14
900928	Hewlett Packard	83752A	Synthesized Sweeper, 0.01-20 GHz	3610A00866	3/20/15
901592	Insulated Wire Inc.	KPS-1503-3600-KPR	SMK RF Cables 20'	NA	8/16/14
901593	Insulated Wire Inc.	KPS-1503-360-KPR	SMK RF Cables 36"	NA	8/16/14
901594	Insulated Wire Inc.	KPS-1503-360-KPR	SMK RF Cables 36"	NA	8/16/14

Test Personnel:

Daniel Baltzell
Test Engineer



Signature

August 9, 2013
Date of Test

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA20170
<http://www.rheintech.com>

Client: Harris Corporation
Model: XG-75 VHF
FCC ID: OWDTR-0059-E
Standards: FCC Parts 22, 90
Report #: 2013115

7 Conclusion

The data in this Class 2 report shows that the Harris Corporation Model XG-75 VHF; FCC ID: OWDTR-0059-E, complies with the applicable requirements of FCC Parts 2 and 22 for a Class 2 permissive change.