


INTERTEK TESTING SERVICES


Report No.: HK12030861-3
Sample No.: 1/3, 2/3, 3/3

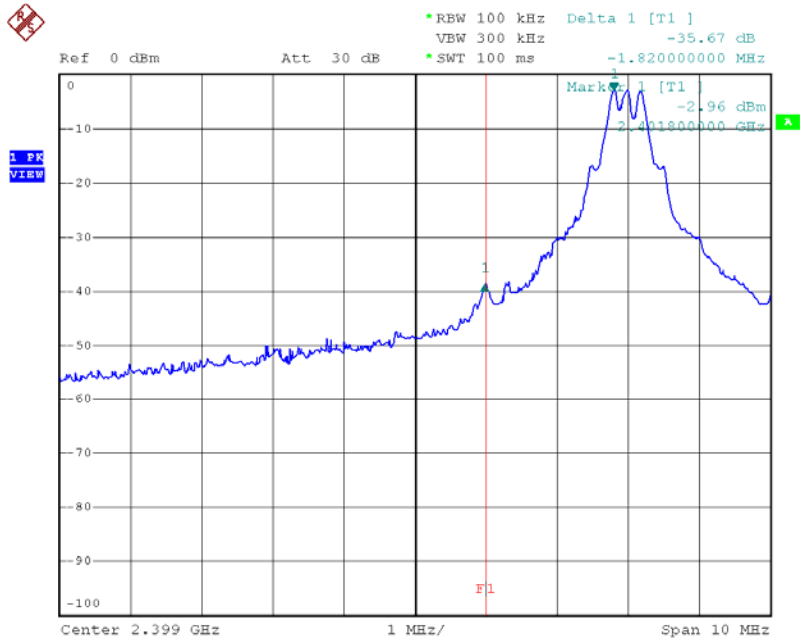

OATS = 95.0 dBuV/m
 Field Strength (Peak)
 = 95.00 – 35.67 dBuV/m
 = 59.33 dBuV/m
 (Limit: 74 dBuV/m)

Field Strength (Average)
 = 59.33 – AF dBuV/m
 = 59.33 – 21.90 dBuV/m
 = 37.43 dBuV/m
 (Limit: 54 dBuV/m)

Date: 2.APR.2012 11:15:27

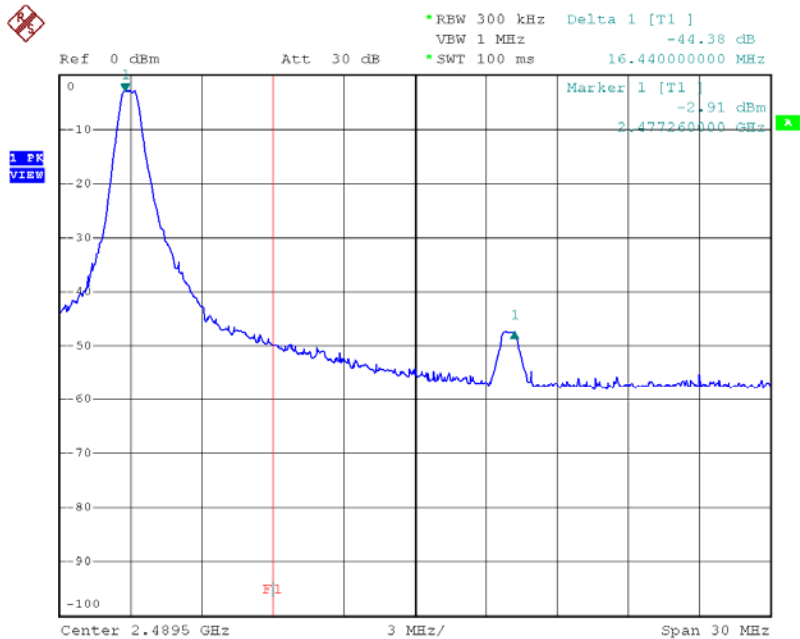

OATS = 91.3 dBuV/m
 Field Strength (Peak)
 = 91.30 – 44.38 dBuV/m
 = 46.92 dBuV/m
 (Limit: 74 dBuV/m)

Field Strength (Average)
 = 46.92 – AF dBuV/m
 = 46.92 – 21.90 dBuV/m
 = 25.02 dBuV/m
 (Limit: 54 dBuV/m)

Date: 2.APR.2012 11:17:49

Bandedge Plot – Pursuant to FCC Part 15 Section 15. 249 Requirement

(Pass/Fail)