

FCC TEST REPORT


Test report No.: EMC- FCC- R0048
FCC ID: OYUIP-FINGER007
Type of equipment: RFID & Biometrics Access Controller
Basic Model: IP-FINGER007
Variant Model: IP-FINGER006
Applicant: IDTECH Co.,Ltd.
FCC Rule Part(s): FCC Part 15 Subpart C 2008
Section 15.209
Frequency Range: 125 kHz
Test result: Complied


The above equipment was tested by EMC compliance Testing Laboratory for compliance with the requirements of FCC Rules and Regulations.

The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Date of test: August 8, 2011 ~ August 11 , 2011

Issued date: August 17 , 2011


Tested by: _____
SON, MIN GI


Approved by: _____
KIM, CHANG MIN

[Contents]

1. Client information	3
2. Laboratory information	4
3. Description of E.U.T.	5
3.1 Basic description	5
3.2 General description	5
3.3 Test frequency	6
4. Summary of test results	7
4.1 Standards & results	7
4.2 Uncertainty	7
5. Test results	8
5.1 Antenna Requirement	8
5.2 Field Strength of Fundamental Emissions	9
5.3 Radiated Emissions	12
5.4 Conducted Emission- N/A	15
5.5 20dB bandwidth	16
6. Test equipment used for test	17

Appendix 1 Test setup photos

Appendix 2 External photos of EUT

Appendix 3 Internal photos of EUT

Appendix 4 Block diagram

Appendix 5 Schematics

Appendix 6 User manual

Appendix 7 Part list

Appendix 8 Layout diagram

1. Client information

Applicant : IDTECH Co.,Ltd.
Address : 5F,Ace Techno Tower B/D, 684-1 Deungchon-Dong,
Gangseo-Gu,Seoul 157-030,Korea
Telephone number : +82-2-2659-0005
Facsimile number : +82-2-2659-0086
Contact person : Sin Young Ha / yhshin@idteck.com

Manufacturer: IDTECH Co.,Ltd.
Address : 5F,Ace Techno Tower B/D, 684-1 Deungchon-Dong,
Gangseo-Gu,Seoul 157-030,Korea

2. Laboratory information

Address

EMC Compliance Ltd.

480-5 Shin-dong, Yeongtong-gu, Suwon-city, Gyunggi-do, 443-390, Korea

Telephone Number: 82 31 336 9919 Facsimile Number: 82 31 336 4767


Certificate

CBTL Testing Laboratory, KOLAS NO.: 231

FCC Filing No.: KR0040

VCCI Registration No.: C-1713, R-1606, T-258

SITE MAP

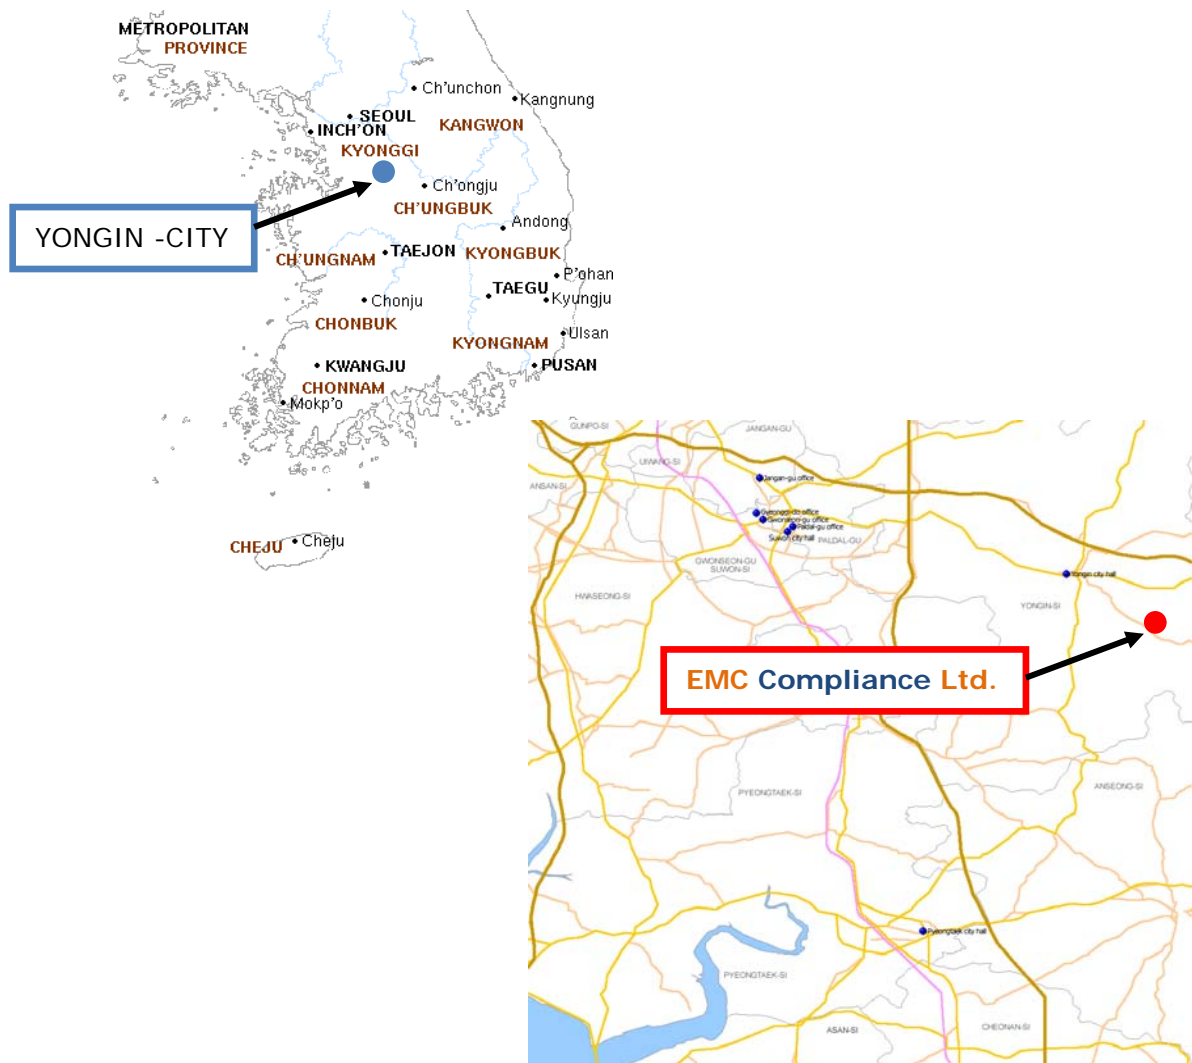

3. Description of E.U.T.

3.1 Basic description

Applicant :	IDTECH Co.,Ltd.
Address of Applicant:	5F,Ace Techno Tower B/D, 684-1 Deungchon-Dong,Gangseo-Gu,Seoul 157-030,Korea
Manufacturer:	IDTECH Co.,Ltd.
Address of Manufacturer:	5F,Ace Techno Tower B/D, 684-1 Deungchon-Dong,Gangseo-Gu,Seoul 157-030,Korea
Type of equipment:	Stand-alone radio equipment
Basic Model:	IP-FINGER007
Varient model:	IP-FINGER006
Serial number:	Engineering Sample

3.2 General description

Frequency	125 kHz
Type of Modulation	PSK
Number of Channels	1 channel
Type of Antenna	Integral (Loop coil antenna)
Power supply	DC 12 V / Max.300mA
Extreme Power supply	Lower voltage: DC 10.2 V, Upper voltage: DC 13.8V
Operating temperature	-20 °C ~ 50 °C *
Operating Humidity	10% to 90% relative humidity non-condensing
Dimension	161.5*134*48.5 (W*H*D)
Weight	525g
Reading Time(card)	30ms
Input port	4 ports (Exit Button, Door Sensor, Aux# 1, Aux#2)
Output port	2 ports (FORM-C Relay Output (COM, NO, NC) / DC12V~18V, Rating Max.2A)
LED indicator	7 Array LED Indicators (Red, Green and Yellow)
Beeper	Piezo buzzer

3.3 Test frequency

	Frequency
Low frequency	-
Middle frequency	125 kHz
High frequency	-

4. Summary of test results

4.1 Standards & results

Rule Reference	Parameter	Report Section	Test Result
15.203	Antenna Requirement	5.1	C
15.209	Field Strength of Fundamental	5.2	C
15.209	Radiated Emissions	5.3	C
15.207	Conducted Emissions	5.4	N/A*
N/A	20dB bandwidth	5.5	C

Note: C=complies
NC= Not complies
NT=Not tested
NA=Not Applicable

*The test is not applicable since the EUT is not the device that is designed to be connected to the public utility(AC) power line.

4.2 Uncertainty

Measurement Item	Combined Standard Uncertainty U _c	Expanded Uncertainty U = KU _c (K = 2)
Conducted RF power	± 0.272 dB	± 0.544 dB
Radiated disturbance	± 1.943 dB	± 3.886 dB
Conducted disturbance	± 1.265 dB	± 2.53 dB

5. Test results

5.1 Antenna Requirement

5.1.1 Regulation

According to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

And according to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.1.2 Result

-Complied

The transmitter has an integral Loop coil antenna.

5.2 Field Strength of Fundamental Emissions

5.2.1 Regulation

According to §15.209(a), for an intentional device, the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Field strength ($\mu\text{V/m}$ @ 3m)	Distance(m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

**Except as provided in paragraph(g), fundamental emissions from intentional radiators operating under the section shall not be located in the frequency bands 54-72MHz, 76-88MHz, 174-216MHz or 470-806MHz, however, Operation within these frequency bands is permitted under other sections of this part, e.g., Section 15.231 and 15.241.

**Limit : $2400/125=19.2\mu\text{V/m}$ @ 300m
Distance Correction Factor = $40\log(\text{test distance} / \text{specific distance})$

5.2.2 Measurement Procedure

Test Procedure The Radiated Electric Field Strength intensity has been measured on semi anechoic chamber with a ground plane and at a distance of 3m.

Frequency : From 9kHz to 30MHz at distance 3m The EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

Frequency : From 30MHz to 1GHz at distance 3m The measuring antenna height varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity. The measurements were performed for both vertical and horizontal antenna polarization.

On any frequency or frequencies below or equal to 1000 MHz, the limits shown are based on measuring equipment employing a CISPR quasi-peak detector function and related measurement bandwidths, unless otherwise specified. The specifications for the measuring instrument using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Interference (CISPR) of the International Electrotechnical Commission. As an alternative to CISPR quasi-peak measurements, the responsible party, at its option, may demonstrate compliance with the emission limits using measuring equipment employing a peak detector function, properly adjusted for such factors as pulse desensitization, as long as the same bandwidths as indicated for CISPR quasi-peak measurements are employed.(15.35(a))

below 1GHz : quasi-peak

* Part 15 Section 15.31 (f)(2) (9kHz-30MHz)

[Limit at 3m]=[Limit at 300m]-40 x log(3[m]/300[m])

[Limit at 3m]=[Limit at 30m]-40 x log (3[m]/30[m])

5.2.3 Test Result

-Complied

Measurement Distance: 3m

Frequency [MHz]	Receiver Bandwidth [kHz]	Reading [dB(μV)]	Pol. [V/H]	Factor [dB]	Limit [dB(μV/m)]	Result [dB(μV/m)]	Margin [dB]
QP DATA.							
0.125	0.2	103.3	H	-21.5	125.7	81.8	43.9

*worstcase horizontal

Margin (dB) = Limit – Actual

[Result] = Reading – Amp Gain + Attenuator + AF + CL]

1. H = Horizontal, V = Vertical Polarization

2. ATT = Attenuation (10dB pad and/or Insertion Loss of HPF), AF/CL = Antenna Factor and Cable Loss

* The spurious emission at the frequency does not fall in the restricted bands.

** The measured result is within the test standard limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95 % level of confidence. However, the result indicates that compliance is more probable than non-compliance.

NOTE: All emissions not reported were more than 20 dB below the specified limit or in the noise floor.

5.3 Radiated Emissions

5.3.1 Regulation

According to §15.209(a), for an intentional device, the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Field strength ($\mu\text{V/m}$ @ 3m)	Distance(m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

**Except as provided in paragraph(g).fundamental emissions from intentional radiators operating under the section shall not be located in the frequency bands 54-72MHz. 76-88MHz. 174-216MHz or 470-806MHz. however. Operation within these frequency bands is permitted under other sections of this part. e.g., Section 15.231 and 15.241.

**Limit : $2400/125=19.2\mu\text{V/m}$ @ 300m
Distance Correction Factor = $40\log(\text{test distance} / \text{specific distance})$

5.3.2 Measurement Procedure

The spurious emissions from the EuT will be measured on an open area test site in the frequency range of 9 kHz to 30 MHz using a tuned receiver and a shielded loop antenna.

The antenna was positioned 3, 10 or 30 meters horizontally from the EuT.

Measurements have been made in all three orthogonal axes and the shielded loop antenna was rotated to locate the maximum of the emissions.

In the case where larger measuring distances are required the results will extrapolated based on the values measured on the closer distances according to Section 15.31 (f) (2) [2].

The final measurement will be performed with an EMI Receiver set to Quasi Peak detector except for the frequency bands 9 kHz to 90 kHz and 110 to 490 kHz where an average detector will be used according to Section 15.209 (d) [2].

The final level, expressed in dB μ V/m, is arrived at by taking the reading from the EMI receiver (Level dB μ V) and adding the antenna correction factor and cable loss factor (Factor dB) to it. This result then has to be compared with the relevant FCC limit. The resolution bandwidth during the measurement is as follows:

9 kHz – 150 kHz: ResBW: 200 Hz

150 kHz – 30 MHz: ResBW: 9 kHz

5.3.3 Test Result

-Complied

Measurement Distance: 3m
-Below 30MHz

Frequency [MHz]	Receiver Bandwidth [kHz]	Reading [dB(μV)]	Pol. [V/H]	Factor [dB]	Limit [dB(μV/m)]	Result [dB(μV/m)]	Margin [dB]
Peak DATA.							
Average DATA.							

No Spurious Emission Found

-Above 30MHz

Frequency [MHz]	Receiver Bandwidth [kHz]	Reading [dB(μV)]	Pol. [V/H]	Factor [dB]	Limit [dB(μV/m)]	Result [dB(μV/m)]	Margin [dB]
QP DATA.							
39.487	120	49.7	V	-13.5	40.0	36.2	3.8
88.537	120	51.3	H	-16.9	43.5	34.4	9.1
144.005	120	47.6	H	-11.5	43.5	36.1	7.4
201.605	120	48.2	H	-14.5	43.5	33.7	9.8
240.010	120	55.0	H	-12.1	46.0	42.9	3.1
288.010	120	50.6	H	-10.3	46.0	40.3	5.7
336.009	120	42.0	H	-8.6	46.0	33.4	12.6

Margin (dB) = Limit – Actual

[Result] = Reading – Amp Gain + Attenuator + AF + CL

1. H = Horizontal, V = Vertical Polarization

2. ATT = Attenuation (10dB pad and/or Insertion Loss of HPF), AF/CL = Antenna Factor and Cable Loss

* The spurious emission at the frequency does not fall in the restricted bands.

** The measured result is within the test standard limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95 % level of confidence. However, the result indicates that compliance is more probable than non-compliance.

NOTE: All emissions not reported were more than 20 dB below the specified limit or in the noise floor.

5.4 Conducted Emission- N/A

5.4.1 Regulation

According to §15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56 *	56 to 46 *
0.5 – 5	56	46
5 – 30	60	50

* Decreases with the logarithm of the frequency.

According to §15.107(a), for unintentional device, except for Class A digital devices, line conducted emission limits are the same as the above table.

5.4.2 Measurement Procedure

1. The EUT was placed on a wooden table of size, 1 m by 1.5 m, raised 80 cm in which is located 40 cm away from the vertical wall and 1.5m away from the side wall of the shielded room.
2. Each current-carrying conductor of the EUT power cord was individually connected through a 50 Ω /50 μ H LISN, which is an input transducer to a Spectrum Analyzer or an EMI/Field Intensity Meter, to the input power source.
3. Exploratory measurements were made to identify the frequency of the emission that had the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable position, and with a typical system equipment configuration and arrangement. Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that had produced the emission with the highest amplitude relative to the limit was selected for the final measurement.
4. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) was then performed over the frequency range of 0.15 MHz to 30 MHz.
5. The measurements were made with the detector set to PEAK amplitude within a bandwidth of 10 kHz or to QUASI-PEAK and AVERAGE within a bandwidth of 9 kHz. The EUT was in transmitting mode during the measurements.


5.5 20dB bandwidth

5.5.1 Test Procedure

The measurement was performed in the antenna height to gain the maximum of electric field strength.

5.5.2 Test Result

-Complied

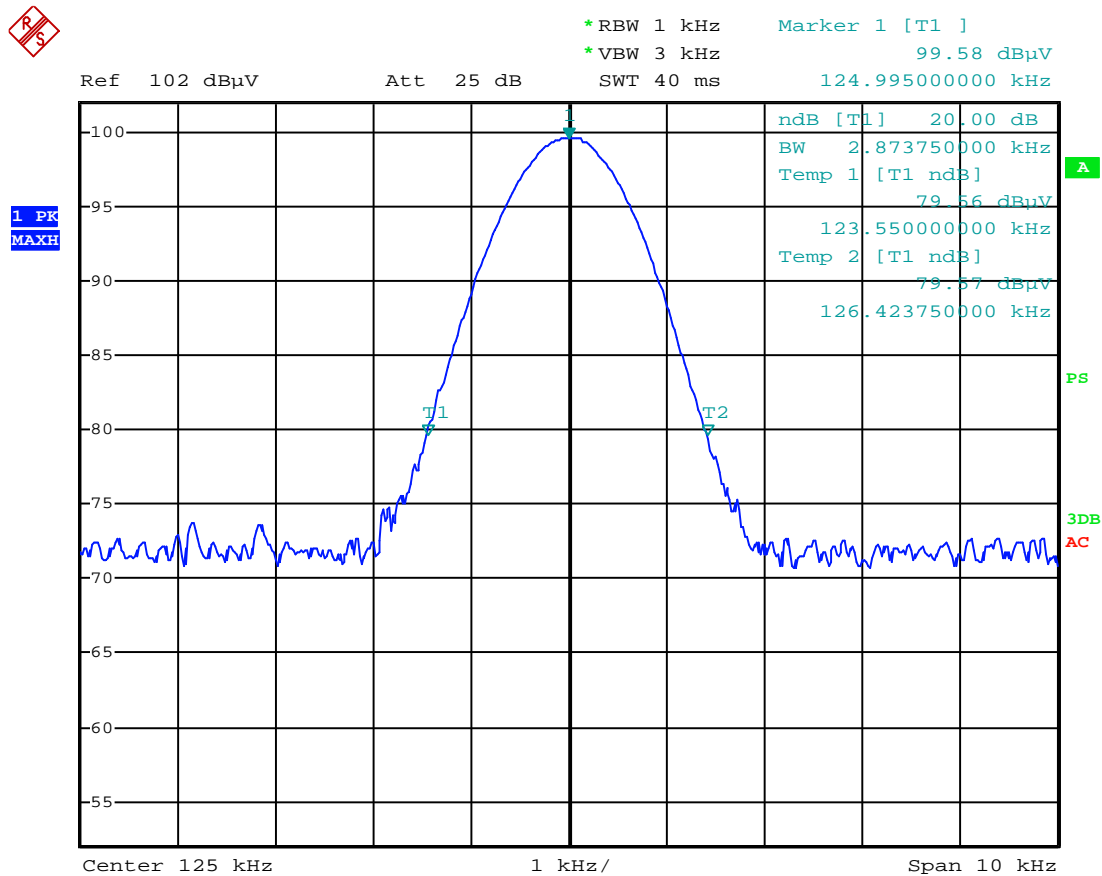

6. Test equipment used for test

	Description	Manufacture	Model No.	Serial No.	Next Cal Date.
□	Temp & humidity chamber	taekwang	TK-04	TK001	11.12.10
■	Spectrum Analyzer	Agilent	E4407B	US39010142	11.11.01
■	Signal Generator	HP	E4432B	GB39340611	11.11.01
□	Modulation Analyzer	HP	8901B	3538A05527	11.11.08
□	Function Generator	Agilent	33250A	MY4006432	12.02.04
□	Audio Analyzer	HP	8903B	3729A19213	11.11.04
□	AC Power Supply	KIKUSUI	PCR2000W	GB001619	11.11.01
□	DC Power Supply	Tektronix	PS2521G	TW53135	11.11.01
■	DC Power Supply	Tektronix	PS2520G	TW50517	12.02.25
□	Dummy Load	BIRD	8141	7560	12.09.16
□	Dummy Load	BIRD	8401-025	799	12.09.16
□	EMI Test Receiver	R&S	ESCI	100710	11.12.01
■	EMI Test Receiver	R&S	ESCI	100001	12.07.11
□	Attenuator	HP	8494A	2631A09825	11.11.03
□	Attenuator	HP	8496A	3308A16640	11.11.03
□	Attenuator	R&S	RBS1000	D67079	11.11.03
□	Power sensor	Agilent	E9321A	US40390422	11.11.08
■	LOOP Antenna	EMCO	6502	9205-2745	13.05.22
■	BILOG Antenna	Schwarzbeck	VULB 9168	375	11.11.30
□	HORN Antenna	ETS	3115	00062589	11.12.22
□	Power Divider	Weinschel	1580-1	NX380	12.09.14
■	Exit Button	IDTECH Co.,Ltd.	EB10	-	-
■	Strike Lock	IDTECH Co.,Ltd.	IES130NO	-	-
■	Door Contact	IDTECH Co.,Ltd.	DCT100	-	-
■	Reader	IDTECH Co.,Ltd.	RF10	-	-