

MEASUREMENT REPORT

FCC PART 15C / WLAN 802.11b/g/n

FCC ID: P27ME221

Applicant: Sercomm Corporation

Application Type: Certification

Product: Subscriber End Equipment HGW

Model No.: AME-4221SR

Brand Name: Airtel

FCC Classification: Digital Transmission System (DTS)

FCC Rule Part(s): Part 15 Subpart C (Section 15.247)

Test Procedure(s): ANSI C63.10-2013, KDB 662911 D01v02r01

Test Date: August 17 ~ September 08, 2020

Reviewed By:

oscar shi

(Oscar Shi)

Approved By:

Robin Wu

(Robin Wu)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2008RSU023-U1	Rev. 01	Initial Report	09-24-2020	Valid

CONTENTS

Description	Page
General Information.....	5
1. INTRODUCTION.....	6
1.1. Scope.....	6
1.2. MRT Test Location.....	6
2. PRODUCT INFORMATION.....	7
2.1. Equipment Description.....	7
2.2. Product Specification Subjective to this Report	7
2.3. Working Frequencies for this report.....	8
2.4. Description of Available Antennas	8
2.5. Test Mode	8
2.6. Description of Test Software	9
2.7. Power setting for 2.4GHZ WLAN	9
2.8. Duty Cycle.....	9
2.9. EMI Suppression Device(s)/Modifications.....	11
2.10. Labeling Requirements	11
2.11. Test Environment Condition	11
2.12. Description of Test Configuration.....	12
2.13. Test System Details	12
3. ANTENNA REQUIREMENTS	13
4. TEST EQUIPMENT CALIBRATION DATE.....	14
5. MEASUREMENT UNCERTAINTY.....	16
6. TEST RESULT	17
6.1. Summary.....	17
6.2. 6dB Bandwidth Measurement.....	18
6.2.1. Test Limit.....	18
6.2.2. Test Procedure used	18
6.2.3. Test Setting	18
6.2.4. Test Setup	18
6.2.5. Test Result	19
6.3. Output Power Measurement.....	24
6.3.1. Test Limit.....	24
6.3.2. Test Procedure Used.....	24
6.3.3. Test Setting	24
6.3.4. Test Setup	24

6.3.5.	Test Result	25
6.4.	Power Spectral Density Measurement.....	27
6.4.1.	Test Limit	27
6.4.2.	Test Procedure Used.....	27
6.4.3.	Test Setting	27
6.4.4.	Test Setup	28
6.4.5.	Test Result	29
6.5.	Conducted Band Edge and Out-of-Band Emissions	38
6.5.1.	Test Limit	38
6.5.2.	Test Procedure Used.....	38
6.5.3.	Test Setting	38
6.5.4.	Test Setup	39
6.5.5.	Test Result	40
6.6.	Radiated Spurious Emission Measurement.....	65
6.6.1.	Test Limit	65
6.6.2.	Test Procedure Used.....	65
6.6.3.	Test Setting	65
6.6.4.	Test Setup	67
6.6.5.	Test Result	68
6.7.	Radiated Restricted Band Edge Measurement.....	82
6.7.1.	Test Limit	82
6.7.2.	Test Procedure Used.....	83
6.7.3.	Test Setting	83
6.7.4.	Test Setup	84
6.7.5.	Test Result	85
6.8.	AC Conducted Emissions Measurement	153
6.8.1.	Test Limit	153
6.8.2.	Test Setup	153
6.8.3.	Test Result	154
7.	CONCLUSION	156
	Appendix A - Test Setup Photograph.....	157
	Appendix B - EUT Photograph	158

General Information

Applicant:	Sercomm Corporation
Applicant Address:	8F, No. 3-1, YuanQu St., NanKang, Taipei 115, Taiwan, R.O.C.
Manufacturer:	Sercomm Corporation
Manufacturer Address:	8F, No. 3-1, YuanQu St., NanKang, Taipei 115, Taiwan, R.O.C.
Test Site:	MRT Technology (Suzhou) Co., Ltd
Test Site Address:	D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China

Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is an FCC accredited testing laboratory (MRT Designation No. CN1166) on the FCC website.
- MRT facility is an ISED recognized testing laboratory (MRT Reg. No. CN0001) on the ISED website.
- MRT facility is a VCCI registered (R-20025, G-20034, C-20020, T-20020) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the A2LA under the A2LA Program (Cert. No. 3628.01) and CNAS under the CNAS Program (Cert. No. L10551) in EMC, Safety, Radio, Telecommunications and SAR testing.

1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada and Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The measurement facility compliant with the test site requirements specified in ANSI C63.4-2014.



2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name	Subscriber End Equipment HGW
Model No.	AME-4221SR
Wi-Fi Specification	802.11a/b/g/n/ac
Serial Number	SRMEGA000044
Accessories	
Adapter	Model No.: MSA-C2000IS12.0-24W-IN Input Power: 90 - 270V ~ 50/60Hz, 0.7A max Output Power: 12Vdc 2.0A

2.2. Product Specification Subjective to this Report

Frequency Range	802.11b/g/n-HT20: 2412 ~ 2462 MHz 802.11n-HT40: 2422 ~ 2452 MHz
Channel Number	802.11b/g/n-HT20: 11 802.11b/g/n-HT40: 7
Type of Modulation	802.11b: DSSS 802.11g/n: OFDM
Data Rate	802.11b: 1/2/5.5/11Mbps 802.11g: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 300Mbps
Maximum Output Power	802.11b: 26.39dBm 802.11g: 28.95dBm 802.11n-HT20: 29.57dBm 802.11n-HT40: 26.49dBm

Note: For other features of this EUT, test report will be issued separately.

2.3. Working Frequencies for this report

802.11b/g/n-HT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10	2457 MHz	11	2462 MHz	--	--

802.11n-HT40

Channel	Frequency	Channel	Frequency	Channel	Frequency
03	2422 MHz	04	2427 MHz	05	2432 MHz
06	2437 MHz	07	2442 MHz	08	2447 MHz
09	2452 MHz	--	--	--	--

2.4. Description of Available Antennas

Antenna Type	Frequency Band (GHz)	Antenna Gain (dBi)		Directional Gain (dBi)	
		Ant 0	Ant 1	For Power	For PSD
PIFA Antenna	2.4~2.5	3.30	2.70	3.30	6.31
	5.1~5.85	3.40	3.40	3.40	6.41

Note 1: The EUT supports Cyclic Delay Diversity (CDD) technology for 802.11a/b/g/n/ac mode.

Note 2: The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.

If all antennas have the same gain, G_{ANT} , Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows.

- For power spectral density (PSD) measurements on all devices,

$$\text{Array Gain} = 10 \log (N_{ANT} / N_{SS}) \text{ dB} = 3.01;$$

- For power measurements on IEEE 802.11 devices,

$$\text{Array Gain} = 0 \text{ dB for } N_{ANT} \leq 4;$$

If antenna gains are not equal, Directional gain may be calculated by using the formulas applicable to equal gain antennas with G_{ANT} set equal to the gain of the antenna having the highest gain.

Note 3: The antenna gain is declared by manufacture.

2.5. Test Mode

Test Mode	Mode 1: Transmit by 802.11b (1Mbps)
	Mode 2: Transmit by 802.11g (6Mbps)
	Mode 3: Transmit by 802.11n-HT20 (MCS0)
	Mode 4: Transmit by 802.11n-HT40 (MCS0)

2.6. Description of Test Software

The test utility software used during testing was “QATool_Dbg.exe”, and the version was v3.37. Power parameter value refers to operation description.

2.7. Power setting for 2.4GHZ WLAN


Model	Ch.	Freq. (MHz)	Power Setting (Hex)	Power Setting (Dec)
b	1	2412	24	18.0
	6	2437	28	20.0
	11	2462	26	19.0
g	1	2412	26	19.0
	2	2417	29	20.5
	6	2437	2B	21.5
	10	2457	2B	21.5
	11	2462	26	19.0
n-HT20	1	2412	2B	21.5
	2	2417	2E	23.0
	6	2437	36	27.0
	10	2457	30	24.0
	11	2462	2B	21.5
n-HT40	3	2422	26	19.0
	4	2427	2B	21.5
	6	2437	2F	23.5
	8	2447	2D	22.5
	9	2452	2A	21.0


2.8. Duty Cycle

2.4GHz WLAN (DTS) operation is possible in 20MHz and 40MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz. The RBW and VBW were both greater than $50/T$, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Test Mode	Duty Cycle
802.11b	98.16%
802.11g	93.43%

802.11n-HT20	87.88%
802.11n-HT40	85.37%

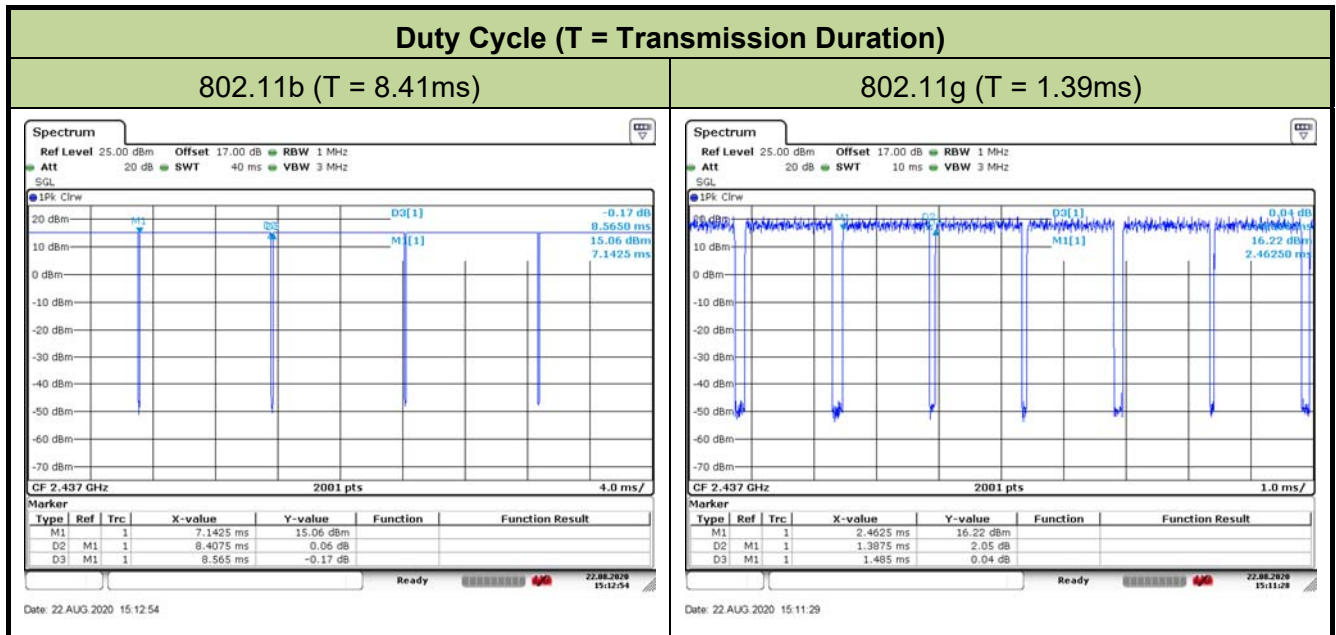

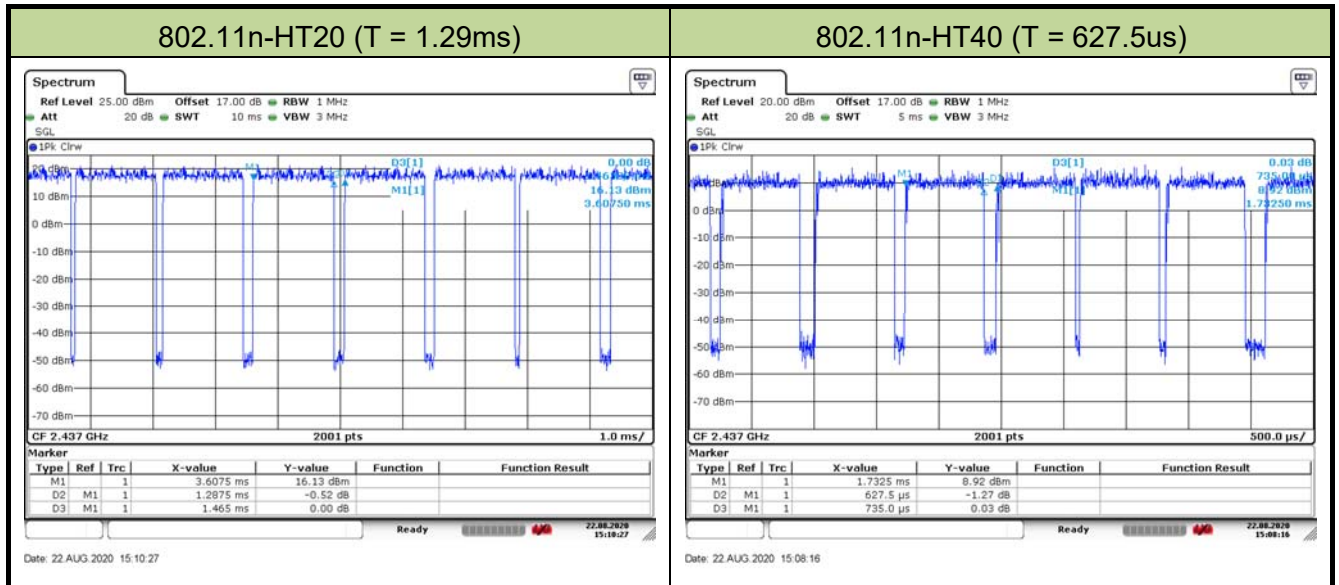

2.9. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.10. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase.


However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

2.11. Test Environment Condition

Ambient Temperature	15°C ~ 35°C
Relative Humidity	20%RH ~75%RH

2.12. Description of Test Configuration

The device was tested per the guidance ANSI C63.10: 2013 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

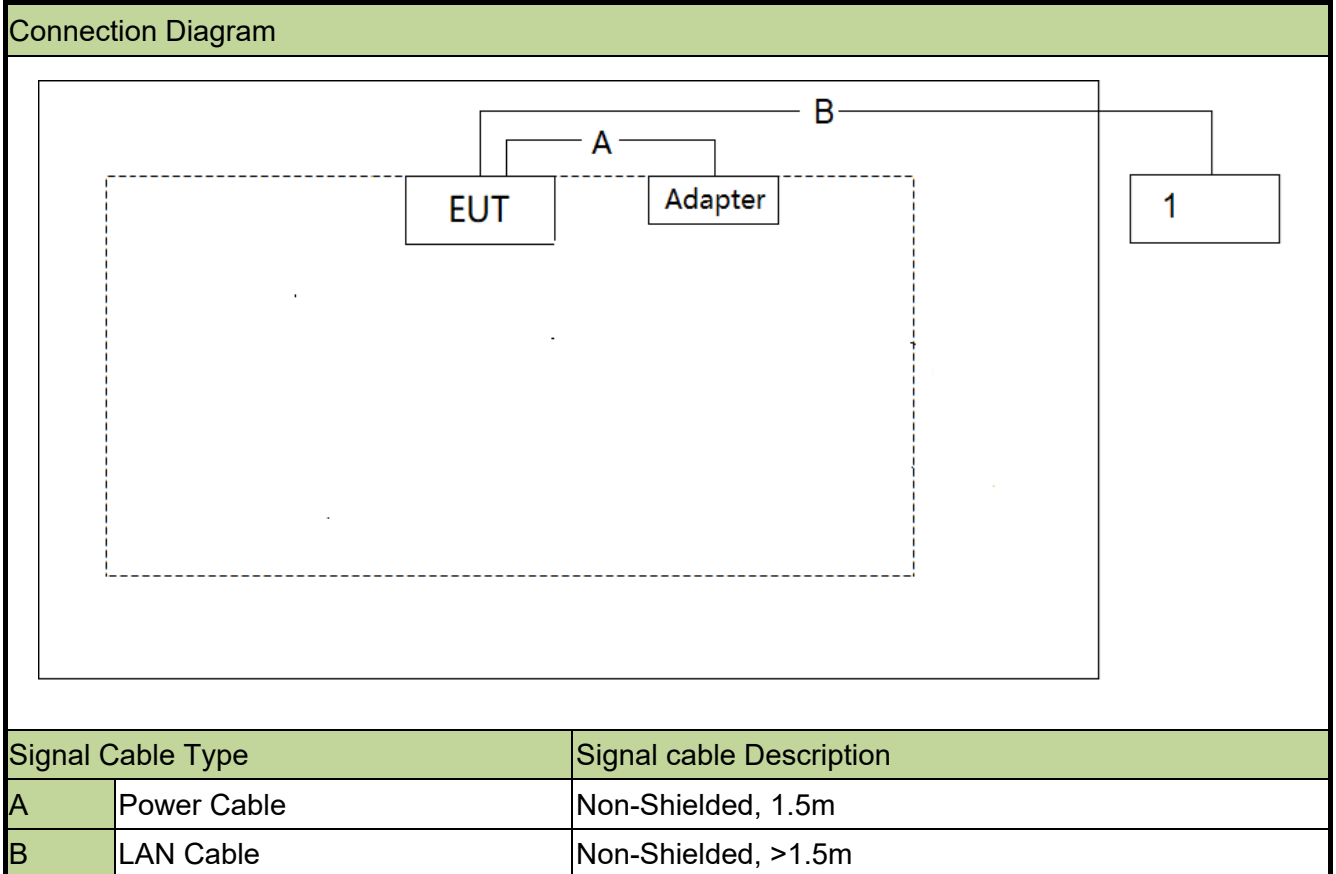

2.13. Test System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product		Manufacturer	Model No.	Serial No.	Power Cord
1	Notebook	Lenovo	E495	N/A	Non-Shielded, 1.8m

3. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The unit complies with the requirement of §15.203.

4. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions - SR2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06185	1 year	2021/01/18
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2021/06/11
Four-Line V-Network	R&S	ENV432	MRTSUE06615	1 year	2020/11/11
Impedance Stabilization Network	TESEQ	ISN T200A	MRTSUE06004	1 year	2021/01/04
Impedance Stabilization Network	TESEQ	ISN T800	MRTSUE06005	1 year	2021/01/04
Impedance Stabilization Network	TESEQ	ISN T8-CAT6	MRTSUE06006	1 year	2021/01/04
V-Network	R&S	ESH3-Z6	MRTSUE06187	1 year	2021/04/14
V-Network	R&S	ESH3-Z6	MRTSUE06188	1 year	2021/04/14
RF Current Probe	R&S	EZ-17	MRTSUE06190	1 year	2021/04/14
Thermal Hygrometer	testo	608-H1	MRTSUE06404	1 year	2021/07/26

Radiated Emissions - AC1

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2021/01/18
PXA Signal Analyzer	Keysight	9030B	MRTSUE06395	1 year	2021/08/30
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2020/11/13
Bilog Period Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2021/04/03
Broad Band Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06023	1 year	2020/10/13
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06024	1 year	2020/12/29
Microwave System Amplifier	Agilent	83017A	MRTSUE06076	1 year	2020/11/15
Preamplifier	EMC Instruments corporation	EMC051845S E	MRTSUE06602	1 year	2020/10/07
Thermohygrometer	Testo	608-H1	MRTSUE06403	1 year	2021/07/26
Anechoic Chamber	TDK	Chamber-AC1	MRTSUE06213	1 year	2021/04/30

Radiated Emission - AC2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Keysight	N9038A	MRTSUE06125	1 year	2021/07/02
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2020/11/13
Bilog Period Antenna	Schwarzbeck	VULB 9162	MRTSUE06022	1 year	2020/10/13
Horn Antenna	Schwarzbeck	BBHA9120D	MRTSUE06171	1 year	2020/10/27
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06024	1 year	2020/12/29
Broadband Coaxial Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2020/12/29
Preamplifier	EMC Instruments corporation	EMC051845SE	MRTSUE06602	1 year	2020/10/07
Temperature/Humidity Meter	Minggao	ETH529	MRTSUE06170	1 year	2020/12/15
Anechoic Chamber	RIKEN	Chamber-AC2	MRTSUE06213	1 year	2021/04/30

Conducted Test Equipment - TR3

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2021/04/14
EXA Signal Analyzer	Keysight	N9010B	MRTSUE06607	1 year	2021/01/08
Signal Analyzer	R&S	FSV40	MRTSUE06218	1 year	2021/04/14
Power Meter	Agilent	U2021XA	MRTSUE06030	1 year	2020/11/18
USB wideband power sensor	Keysight	U2021XA	MRTSUE06446	1 year	2021/06/11
USB wideband power sensor	Keysight	U2021XA	MRTSUE06447	1 year	2021/06/11
Bluetooth Test Set	Anritsu	MT8852B-042	MRTSUE06389	1 year	2021/06/11
Audio Analyzer	Agilent	U8903B	MRTSUE06143	1 year	2021/06/11
Modulation Analyzer	HP	HP8901A	MRTSUE06098	1 year	2020/10/10
Attenuator	MVE	6dB	MRTSUE06534	1 year	2020/12/12
Attenuator	MVE	10dB	MRTSUE06543	1 year	2020/12/12
Wideband Radio Communication Tester	R&S	CMW 500	MRTSUE06243	1 year	2020/11/07
DC Power Supply	GWINSTEK	DPS-3303C	MRTSUE06064	N/A	N/A
Temperature & Humidity Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2020/11/07
Thermal Hygrometer	testo	608-H1	MRTSUE06401	1 year	2021/07/26

Software	Version	Function
EMI Software	V3	EMI Test Software

5. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
Measurement Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 9kHz~150kHz: 3.74dB 150kHz~30MHz: 3.44dB
Radiated Disturbance
Measurement Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): Horizontal: 30MHz~300MHz: 5.04dB 300MHz~1GHz: 4.95dB 1GHz~40GHz: 6.40dB Vertical: 30MHz~300MHz: 5.24dB 300MHz~1GHz: 6.03dB 1GHz~40GHz: 6.40dB
Spurious Emissions, Conducted
Measurement Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.78dB
Output Power
Measurement Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 1.13dB
Power Spectrum Density
Measurement Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 1.15dB
Occupied Bandwidth
Measurement Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.28%

6. TEST RESULT

6.1. Summary

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	6dB Bandwidth	$\geq 500\text{kHz}$	Conducted	Pass	Section 6.2
15.247(b)(3)	Output Power	$\leq 1\text{Watt}$		Pass	Section 6.3
15.247(e)	Power Spectral Density	$\leq 8\text{dBm} / 3\text{kHz}$		Pass	Section 6.4
15.247(d)	Band Edge / Out-of-Band Emissions	$\geq 30\text{dBc}$ (Average)		Pass	Section 6.5
15.205 15.209	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Radiated	Pass	Section 6.6 & 6.7
15.207	AC Conducted Emissions 150kHz - 30MHz	$< \text{FCC } 15.207$ limits	Line Conducted	Pass	Section 6.8

Notes:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) The test results shown in the following sections represent the worst case emissions.

6.2. 6dB Bandwidth Measurement

6.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


6.2.2. Test Procedure used

ANSI C63.10-2013 - Section 11.8.1

6.2.3. Test Setting

1. Set RBW = 100 kHz
2. VBW $\geq 3 \times$ RBW
3. Detector = Peak
4. Trace mode = Max hold
5. Sweep = Auto couple
6. Allow the trace was allowed to stabilize
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

6.2.4. Test Setup

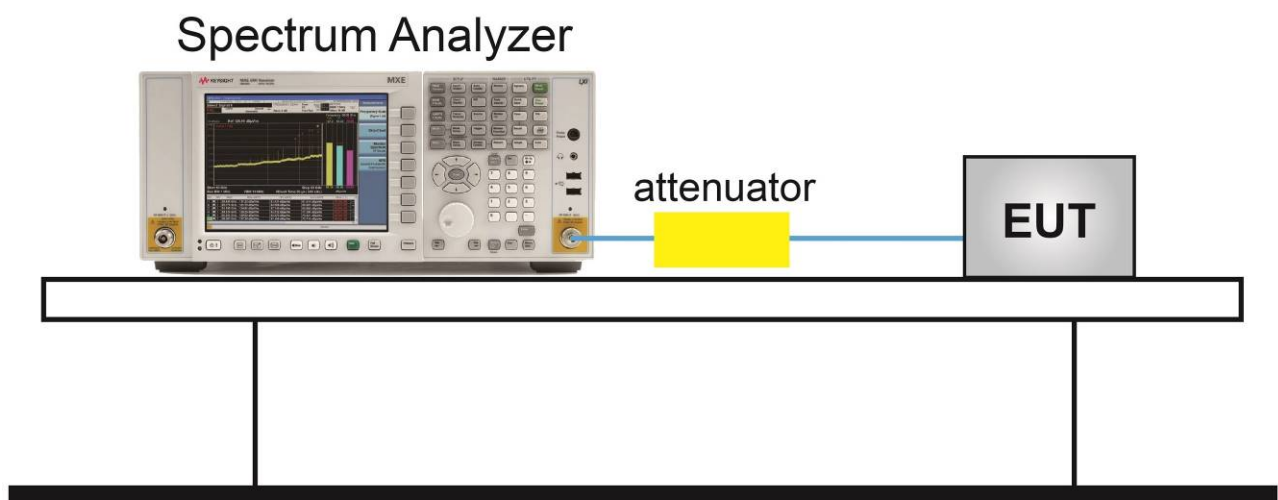


6.2.5. Test Result

Product	Subscriber End Equipment HGW	Test Engineer	Milo Li
Test Site	TR3	Test Date	2020/08/22

Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
Ant 0/ Ant 0 + 1						
802.11b	1Mbps	01	2412	10.00	≥ 0.5	Pass
802.11b	1Mbps	06	2437	10.02	≥ 0.5	Pass
802.11b	1Mbps	11	2462	10.00	≥ 0.5	Pass
802.11g	6Mbps	01	2412	15.11	≥ 0.5	Pass
802.11g	6Mbps	06	2437	15.11	≥ 0.5	Pass
802.11g	6Mbps	11	2462	15.11	≥ 0.5	Pass
802.11n-HT20	MCS0	01	2412	15.11	≥ 0.5	Pass
802.11n-HT20	MCS0	06	2437	15.11	≥ 0.5	Pass
802.11n-HT20	MCS0	11	2462	15.13	≥ 0.5	Pass
802.11n-HT40	MCS0	03	2422	35.02	≥ 0.5	Pass
802.11n-HT40	MCS0	06	2437	34.98	≥ 0.5	Pass
802.11n-HT40	MCS0	09	2452	35.09	≥ 0.5	Pass


802.11b 6dB Bandwidth

Channel 01 (2412MHz)

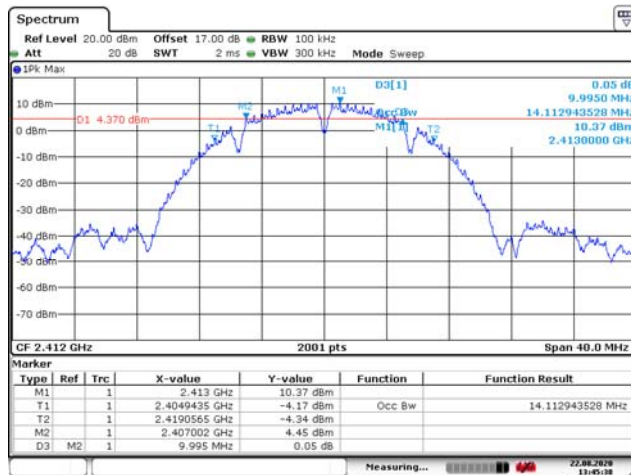


Date: 22 AUG 2020 13:45:38

Channel 06 (2437MHz)

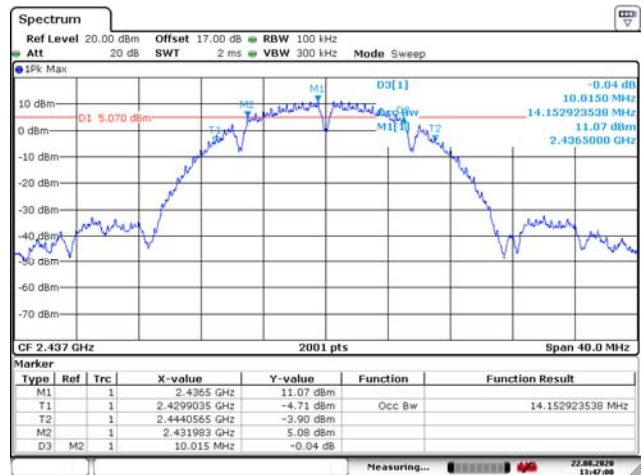

Date: 22 AUG 2020 13:47:01


Channel 11 (2462MHz)

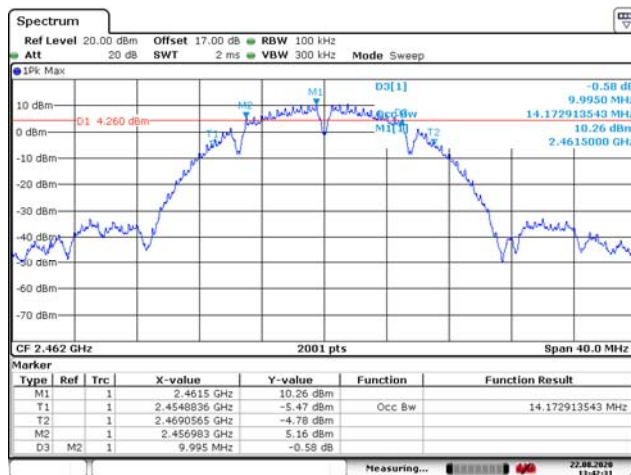

Date: 22 AUG 2020 13:42:31


802.11g 6dB Bandwidth

Channel 01 (2412MHz)

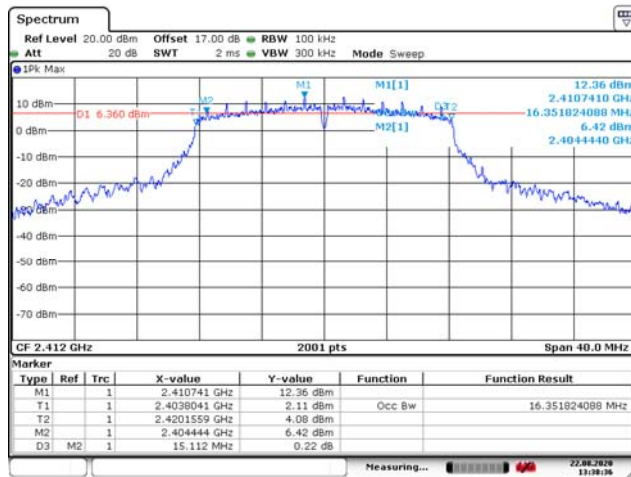


Date: 22 AUG 2020 13:38:37

Channel 06 (2437MHz)

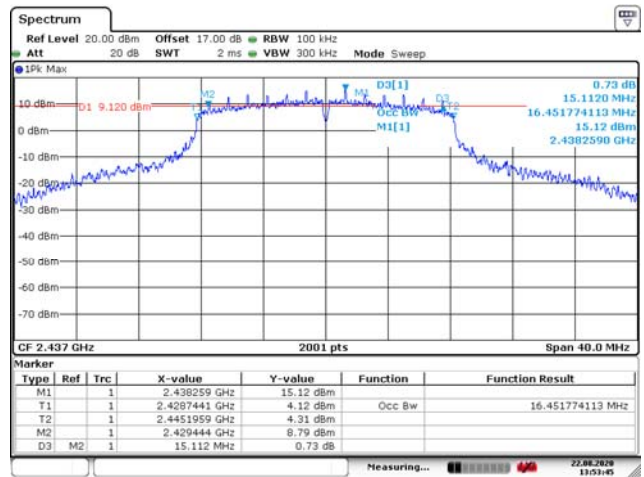

Date: 22 AUG 2020 13:53:45


Channel 11 (2462MHz)

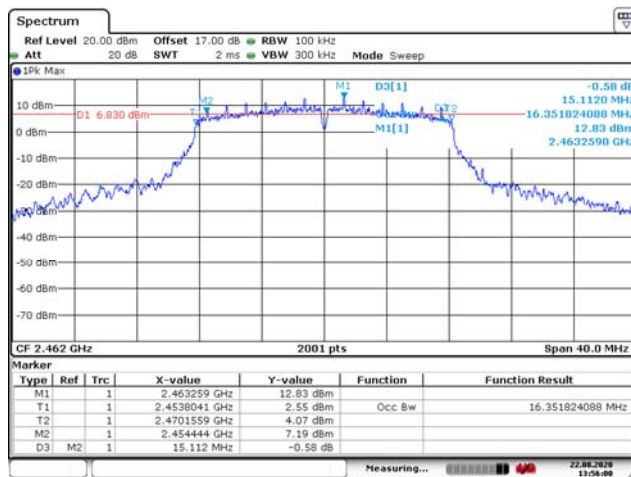

Date: 22 AUG 2020 13:56:00


802.11n-HT20 6dB Bandwidth

Channel 01 (2412MHz)

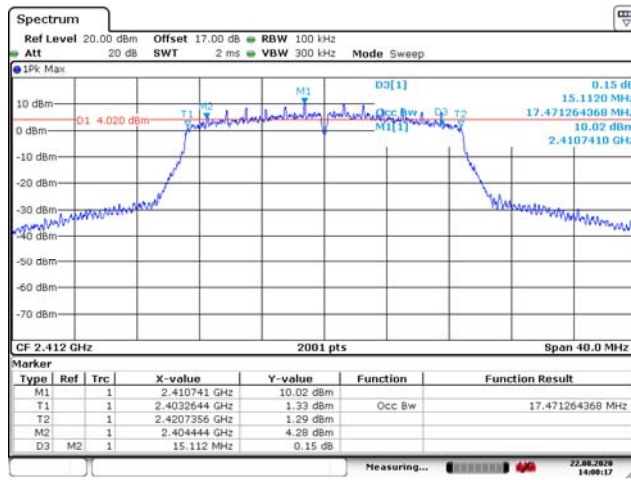


Date: 22 AUG 2020 14:00:18

Channel 06 (2437MHz)

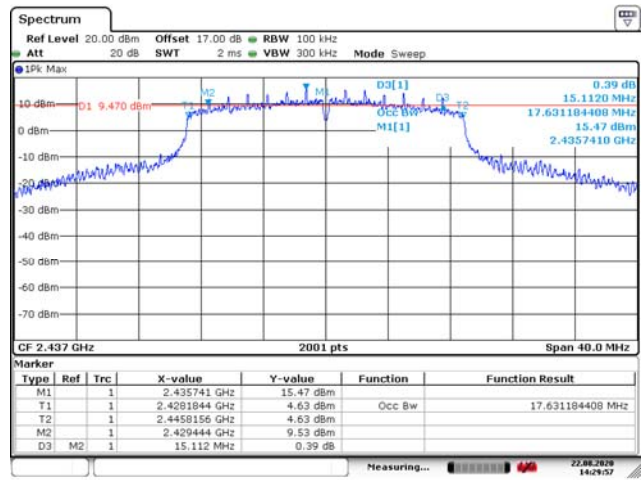

Date: 22 AUG 2020 14:29:57


Channel 11 (2462MHz)

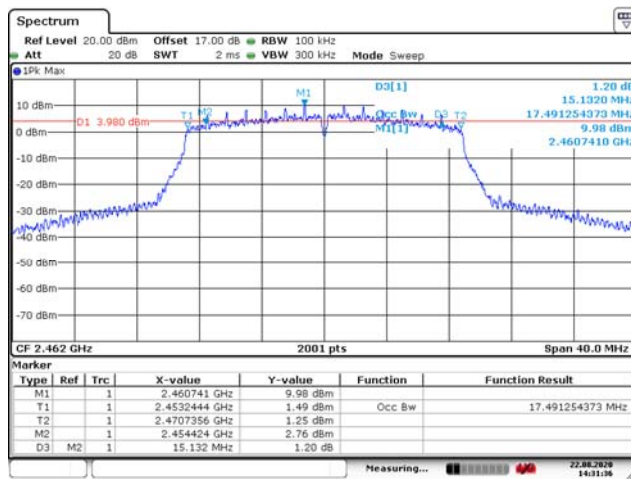

Date: 22 AUG 2020 14:31:36


802.11n-HT40 6dB Bandwidth

Channel 03 (2422MHz)

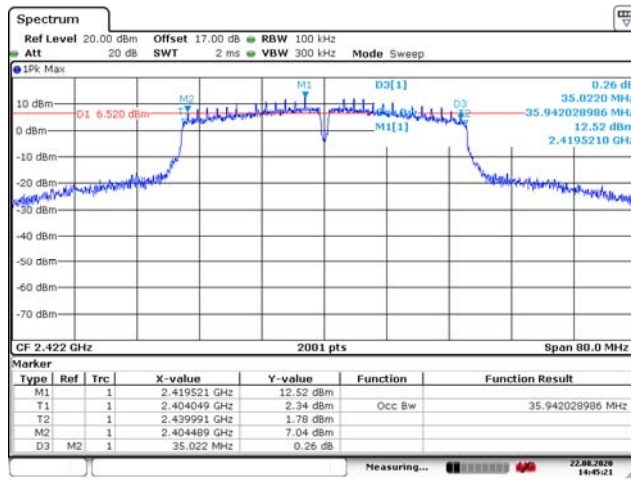


Date: 22 AUG 2020 14:45:21

Channel 06 (2437MHz)

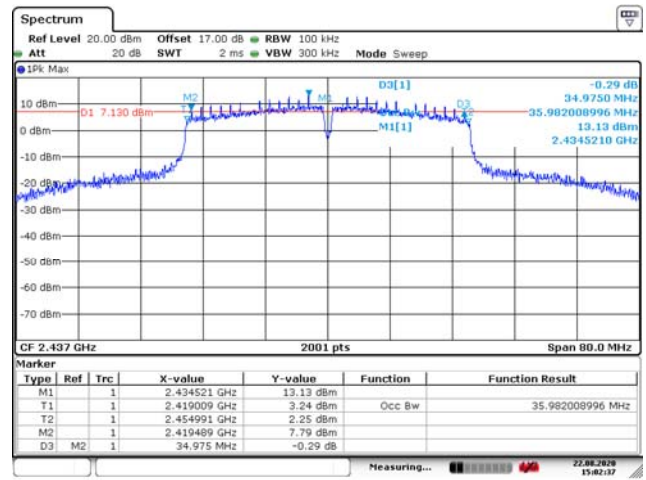

Date: 22 AUG 2020 15:02:38

Channel 09 (2452MHz)

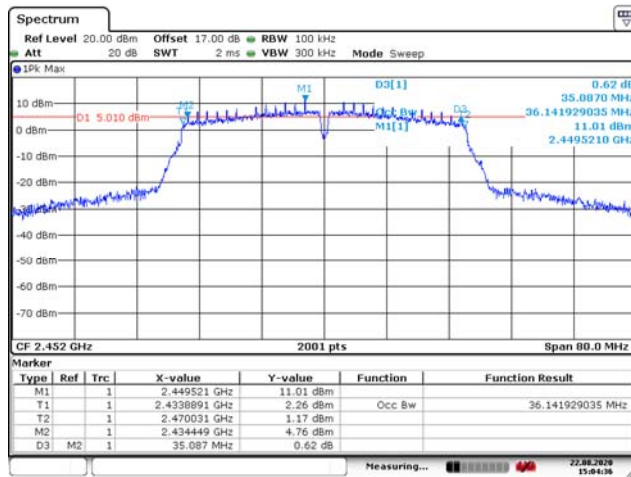

Date: 22 AUG 2020 15:04:36

6.3. Output Power Measurement

6.3.1. Test Limit

The maximum conducted output power shall not exceed 1 Watt (30dBm).

6.3.2. Test Procedure Used


ANSI C63.10-2013 - Section 11.9.2.3.2

6.3.3. Test Setting

Method AVGPM-G (Measurement using a gated RF average-reading power meter)

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required.

6.3.4. Test Setup

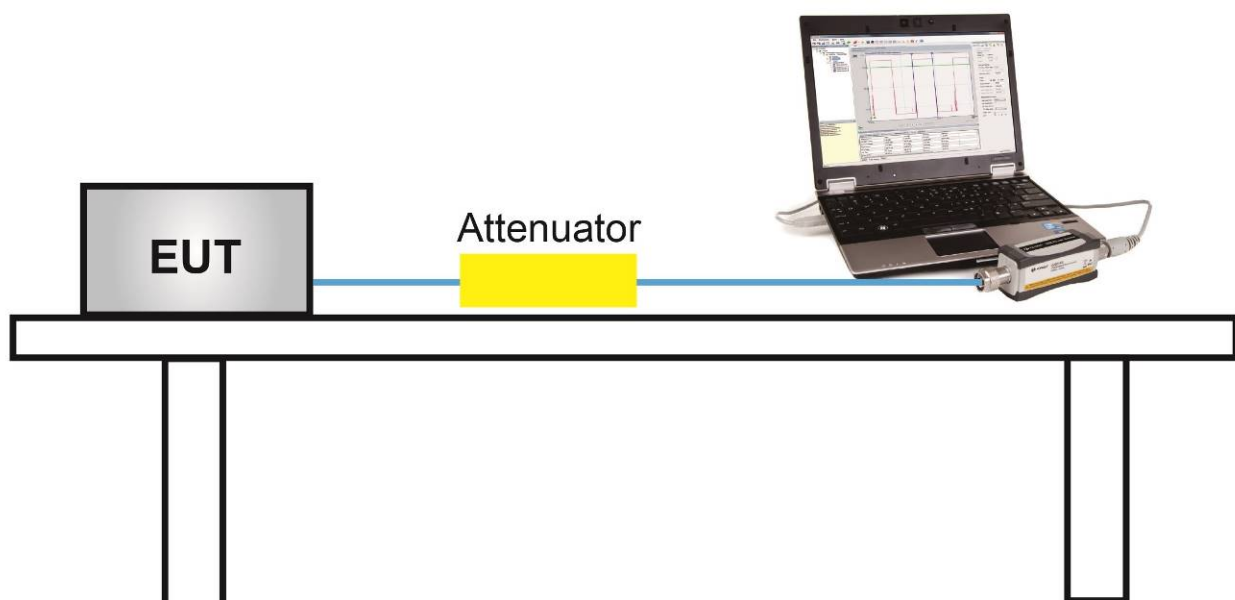

6.3.5.Test Result

Power output test was verified over all data rates of each mode shown as below, and then choose the maximum power output (gray marker) for final test of each channel.

Output power at various data rates for Ant 0 / Ant 0+1 port:

Test Mode	Bandwidth (MHz)	Channel No.	Frequency (MHz)	Data Rate / MCS	Average Power (dBm)
802.11b	20	6	2437	1Mbps	23.21
				5.5Mbps	23.01
				11Mbps	22.87
802.11g	20	6	2437	6Mbps	25.76
				24Mbps	25.43
				54Mbps	25.18
802.11n	20	6	2437	MCS0	26.32
				MCS3	26.17
				MCS7	25.97
802.11n	40	6	2437	MCS0	23.31
				MCS3	23.04
				MCS7	22.86

Product	Subscriber End Equipment HGW	Test Engineer	Milo Li
Test Site	TR3	Test Date	2020/08/22

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Average Power (dBm)		Total Average Power (dBm)	Limit (dBm)	Result
				Ant 0	Ant 1			
11b	1Mbps	01	2412	21.83	22.01	24.93	≤ 30.00	Pass
11b	1Mbps	06	2437	23.21	23.55	26.39	≤ 30.00	Pass
11b	1Mbps	11	2462	22.67	22.61	25.65	≤ 30.00	Pass
11g	6Mbps	01	2412	24.71	24.52	27.63	≤ 30.00	Pass
11g	6Mbps	02	2417	25.65	25.52	28.60	≤ 30.00	Pass
11g	6Mbps	06	2437	25.76	26.12	28.95	≤ 30.00	Pass
11g	6Mbps	10	2457	25.39	26.01	28.72	≤ 30.00	Pass
11g	6Mbps	11	2462	23.45	23.12	26.30	≤ 30.00	Pass
11n-HT20	MCS0	01	2412	22.51	21.98	25.26	≤ 30.00	Pass
11n-HT20	MCS0	02	2417	23.93	23.32	26.65	≤ 30.00	Pass
11n-HT20	MCS0	06	2437	26.32	26.78	29.57	≤ 30.00	Pass
11n-HT20	MCS0	10	2457	23.51	24.17	26.86	≤ 30.00	Pass
11n-HT20	MCS0	11	2462	22.13	22.23	25.19	≤ 30.00	Pass
11n-HT40	MCS0	03	2422	19.71	19.67	22.70	≤ 30.00	Pass
11n-HT40	MCS0	04	2427	22.26	21.91	25.10	≤ 30.00	Pass
11n-HT40	MCS0	06	2437	23.31	23.65	26.49	≤ 30.00	Pass
11n-HT40	MCS0	08	2447	22.04	22.46	25.27	≤ 30.00	Pass
11n-HT40	MCS0	09	2452	20.94	21.07	24.02	≤ 30.00	Pass

Note: Total Average Power (dBm) = $10 \cdot \log \{10^{(\text{ANT 0 Average Power} / 10)} + 10^{(\text{ANT 1 Average Power} / 10)}\}$ (dBm).

6.4. Power Spectral Density Measurement

6.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.

The same method of determining the conducted output power shall be used to determine the power spectral density.


6.4.2. Test Procedure Used

ANSI C63.10-2013 - Section 11.10.3 & 11.10.5

6.4.3. Test Setting

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the OBW
3. RBW = 3kHz
4. VBW = 10kHz
5. Detector = RMS
6. Employ trace averaging (rms) mode over a minimum of 100 traces.
7. Sweep time = auto couple
8. Use the peak marker function to determine the maximum amplitude level.
9. Add $10 \log (1/x)$, where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.
10. Trace was allowed to stabilize

6.4.4. Test Setup

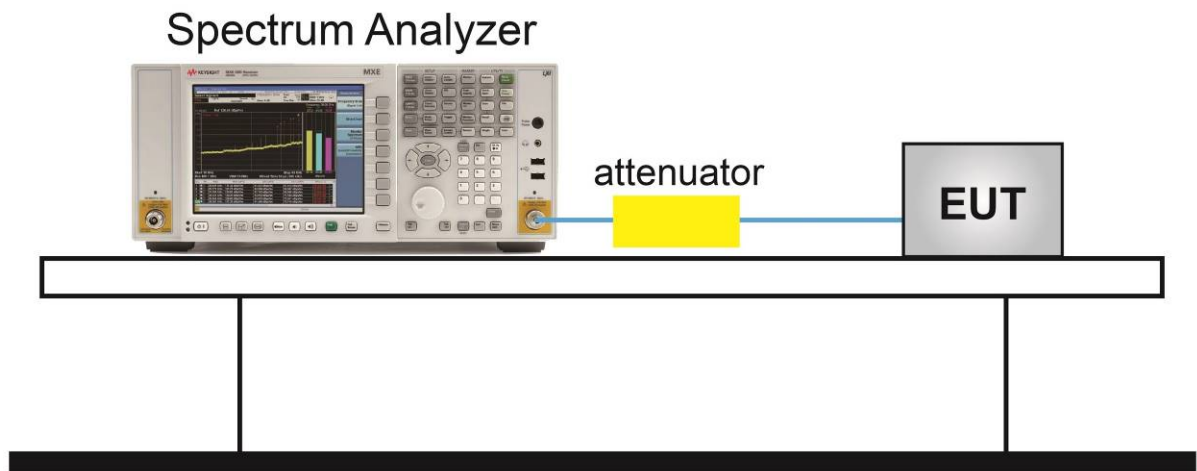

6.4.5. Test Result

Product	Subscriber End Equipment HGW	Test Engineer	Milo Li
Test Site	TR3	Test Date	2020/08/22 ~ 2020/08/27


Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	AVG PSD (dBm/10kHz)		Duty Cycle(%)	Final PSD (dBm/10kHz)	Limit (dBm/3kHz)	Result
				Ant 0	Ant 1				
11b	1Mbps	01	2412	-5.90	-5.85	98.16	-2.78	≤ 8.00	Pass
11b	1Mbps	06	2437	-5.79	-4.58	98.16	-2.05	≤ 8.00	Pass
11b	1Mbps	11	2462	-6.28	-5.24	98.16	-2.64	≤ 8.00	Pass
11g	6Mbps	01	2412	-4.43	-4.90	93.43	-1.35	≤ 8.00	Pass
11g	6Mbps	06	2437	-2.94	-2.37	93.43	0.66	≤ 8.00	Pass
11g	6Mbps	11	2462	-4.91	-4.72	93.43	-1.51	≤ 8.00	Pass
11n-HT20	MCS0	01	2412	-7.57	-6.81	87.88	-3.60	≤ 8.00	Pass
11n-HT20	MCS0	06	2437	-3.53	-2.32	87.88	0.69	≤ 8.00	Pass
11n-HT20	MCS0	11	2462	-8.10	-7.12	87.88	-4.01	≤ 8.00	Pass
11n-HT40	MCS0	03	2422	-12.52	-13.27	85.37	-9.18	≤ 8.00	Pass
11n-HT40	MCS0	06	2437	-9.36	-8.53	85.37	-5.23	≤ 8.00	Pass
11n-HT40	MCS0	09	2452	-12.34	-12.05	85.37	-8.50	≤ 8.00	Pass

Note 1: The total AVG PSD = $10 \cdot \log \{10^{(\text{Ant 0 AVG PSD}/10)} + 10^{(\text{Ant 1 AVG PSD}/10)}\} + 10 \cdot \log (1/\text{Duty cycle})$.


Note 2: Total AVG PSD (dBm / 10kHz) << Limit (dBm / 3kHz), so there is no necessary to conversion unit.

802.11b AVGPDS - Ant 0

Channel 01 (2412MHz)

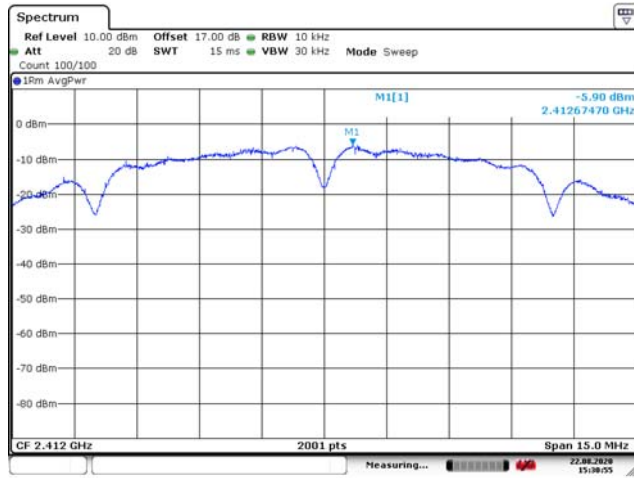

Channel 06 (2437MHz)

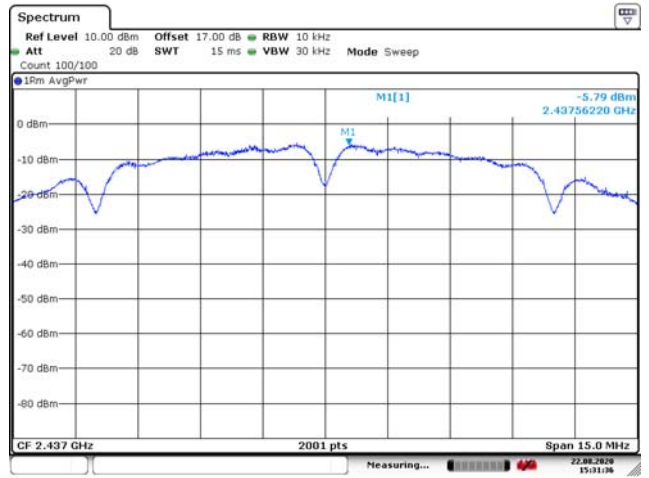


Channel 11 (2462MHz)




802.11g - AVGPSD - Ant 0


Channel 01 (2412MHz)

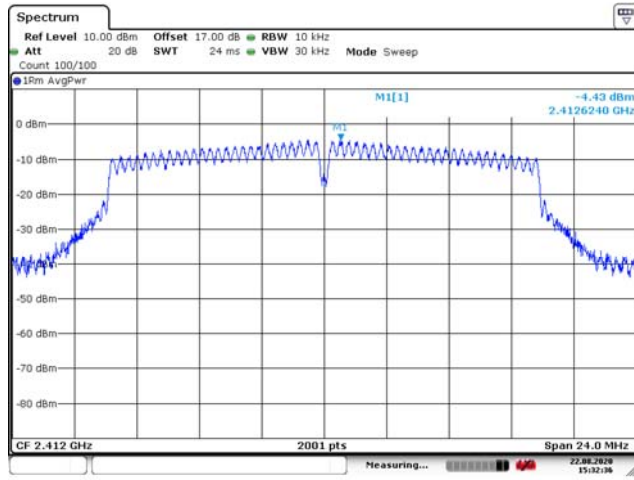

Channel 06 (2437MHz)

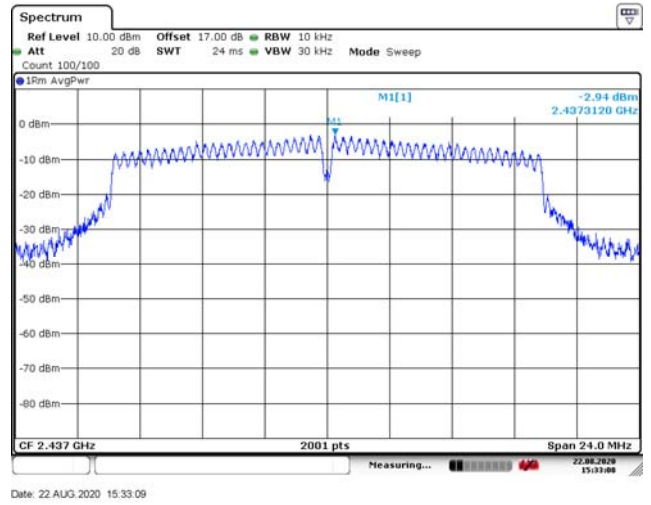


Channel 11 (2462MHz)

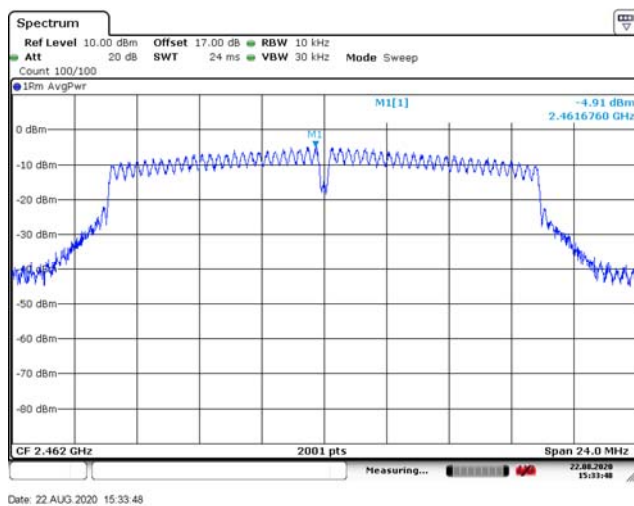


802.11n-HT20 - AVGPSD - Ant 0


Channel 01 (2412MHz)

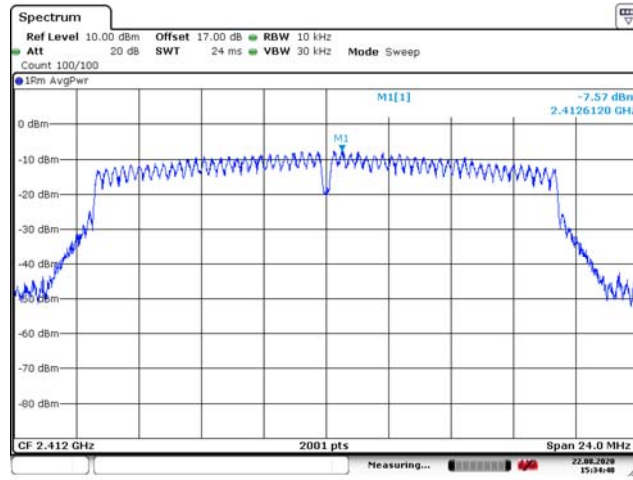

Channel 06 (2437MHz)

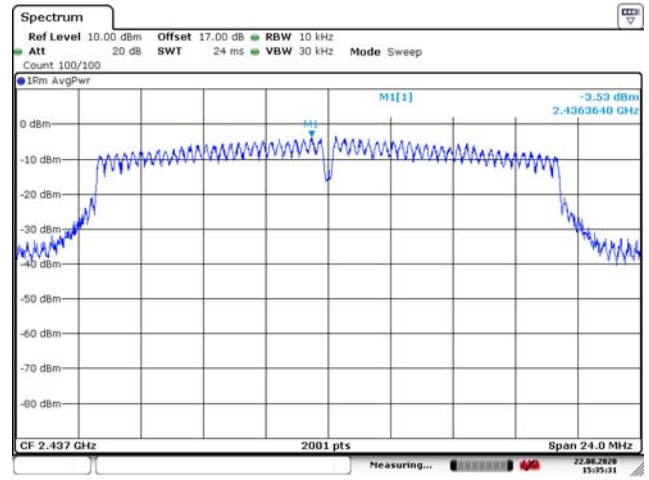


Channel 11 (2462MHz)

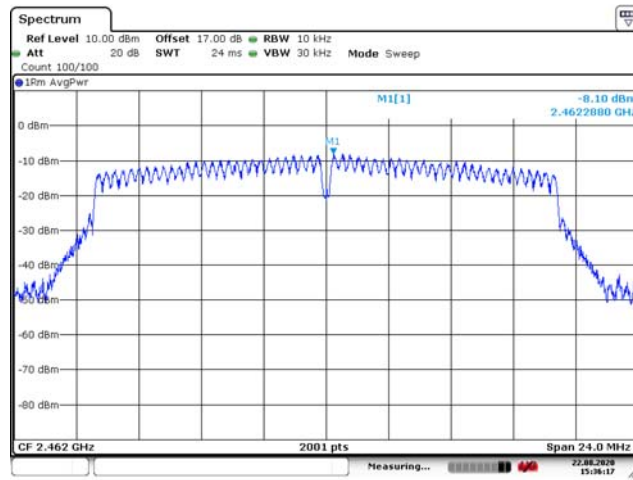


802.11n-HT40 - AVGPDS - Ant 0


Channel 03 (2422MHz)

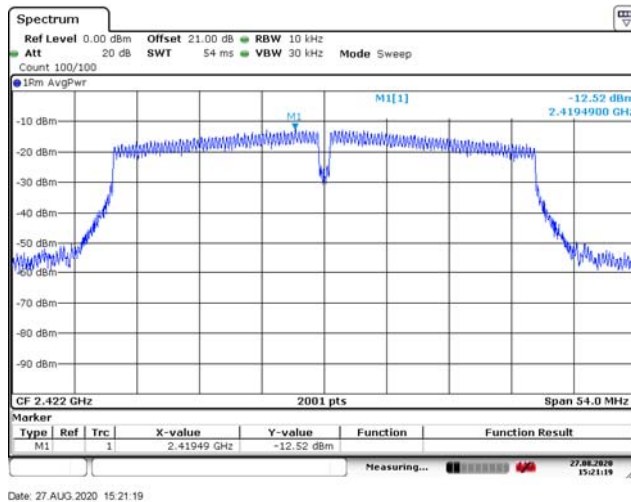

Channel 06 (2437MHz)

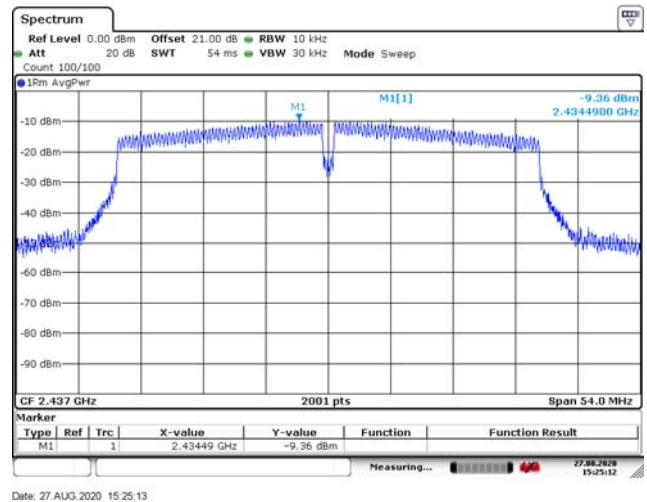


Channel 09 (2452MHz)

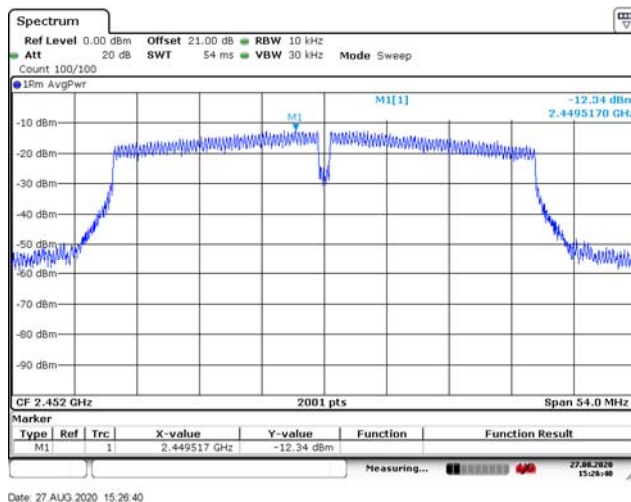


802.11b - AVGPSD - Ant 1


Channel 01 (2412MHz)

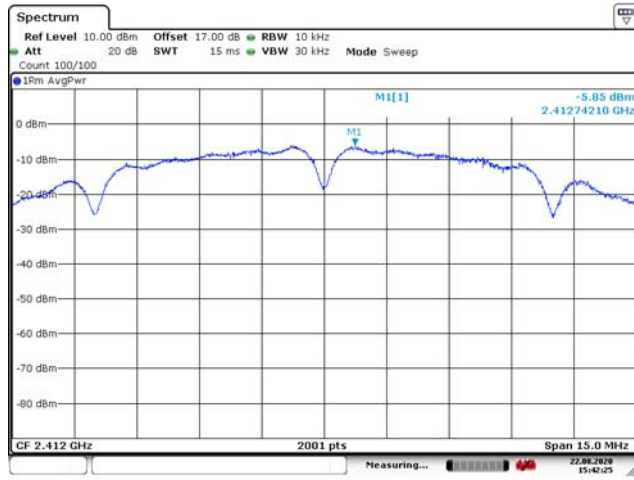

Channel 06 (2437MHz)

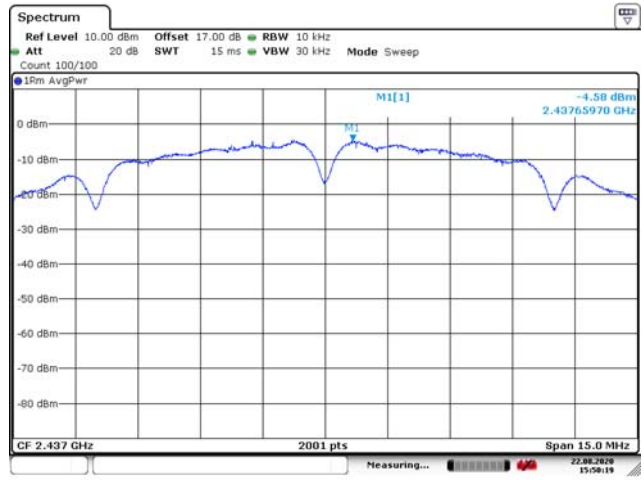


Channel 11 (2462MHz)

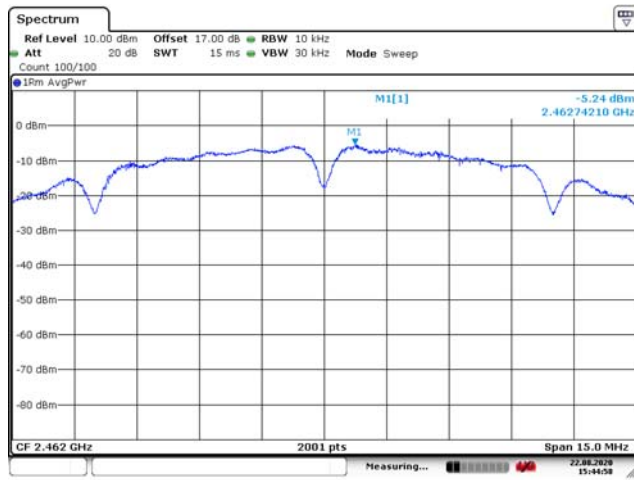


802.11g - AVGPSD - Ant 1


Channel 03 (2412MHz)

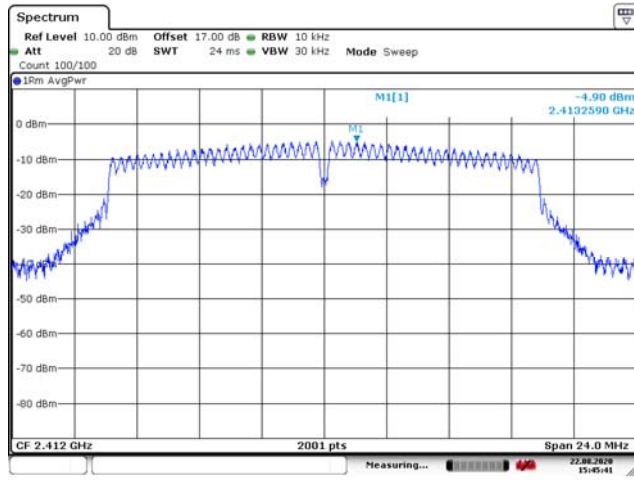

Channel 06 (2437MHz)

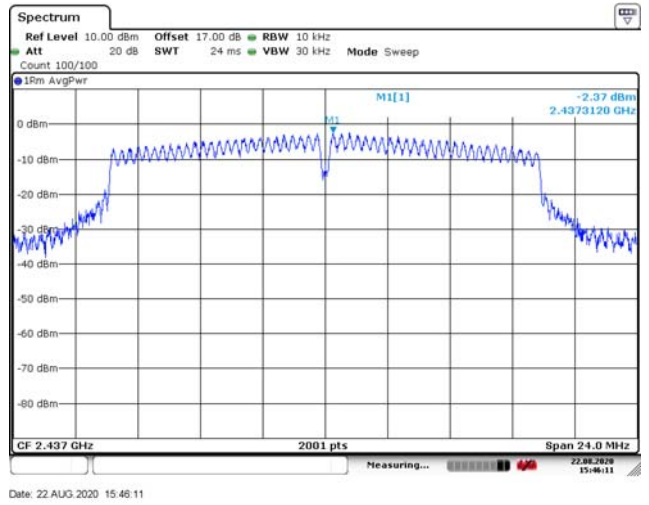


Channel 09 (2462MHz)

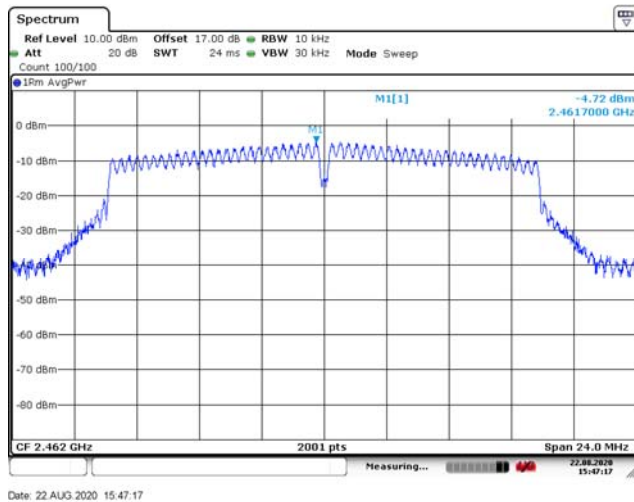


802.11n-HT20 - AVGPSP - Ant 1


Channel 01 (2412MHz)

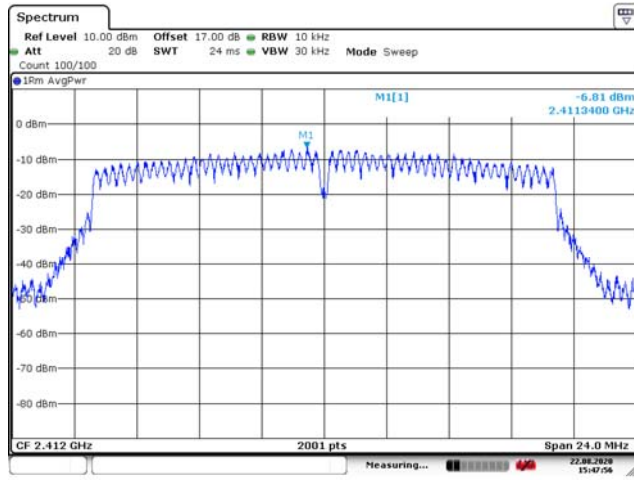

Channel 06 (2437MHz)

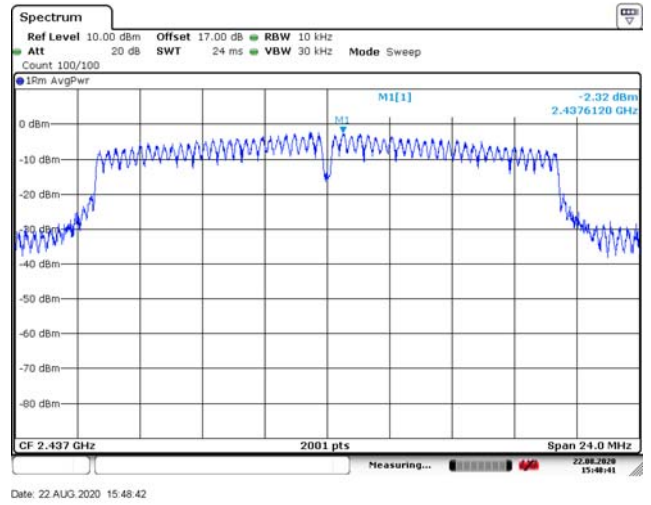


Channel 11 (2462MHz)

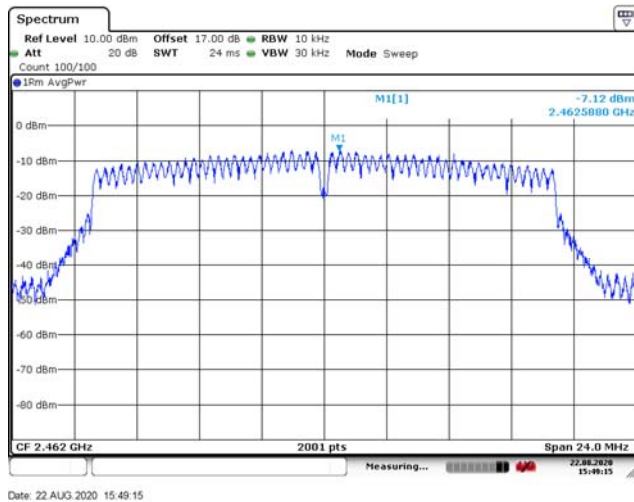


802.11n-HT40 - AVGPDS - Ant 1


Channel 03 (2422MHz)

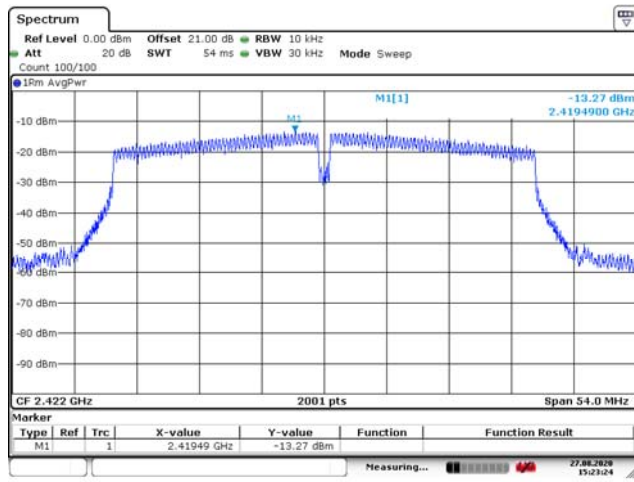

Channel 06 (2437MHz)

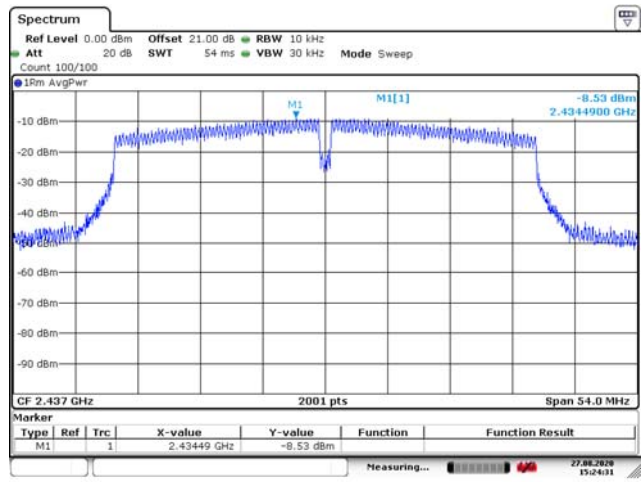

Channel 09 (2452MHz)

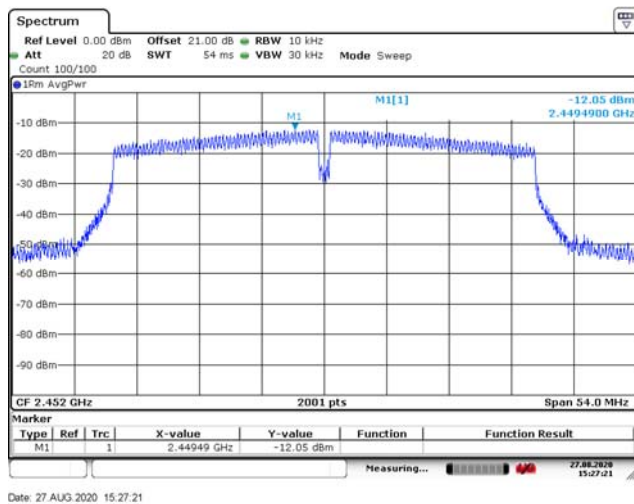

6.5. Conducted Band Edge and Out-of-Band Emissions

6.5.1. Test Limit

The limit for out-of-band spurious emissions at the band edge is 30dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth per the PSD procedure.

6.5.2. Test Procedure Used

ANSI C63.10-2013 - Section 11.11

6.5.3. Test Setting


Reference level measurement

1. Set instrument center frequency to DTS channel center frequency
2. Set the span to ≥ 1.5 times the DTS bandwidth
3. Set the RBW = 100 kHz
4. Set the VBW $\geq 3 \times$ RBW
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Allow trace to fully stabilize

Emission level measurement

1. Set the center frequency and span to encompass frequency range to be measured
2. RBW = 100kHz
3. VBW = 300kHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

6.5.4. Test Setup

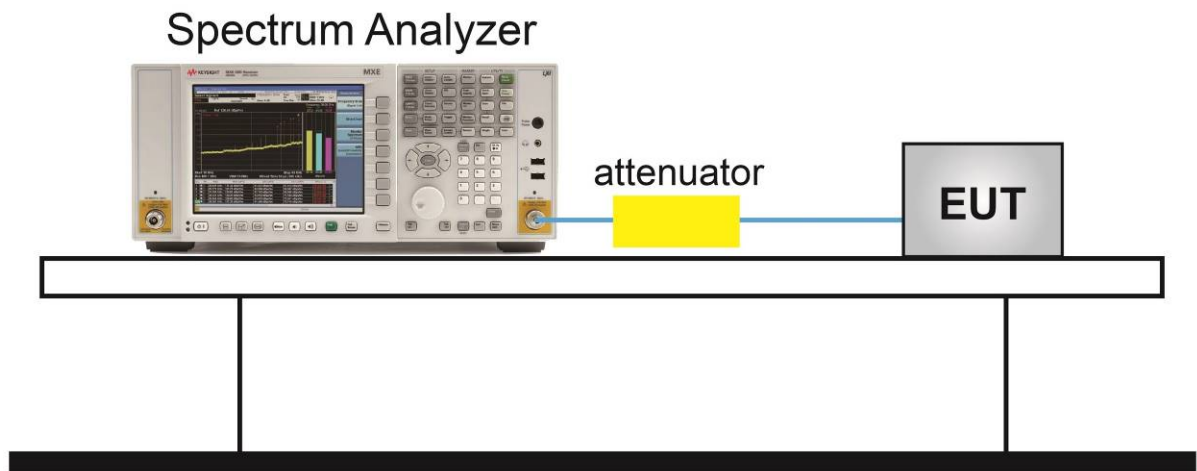

6.5.5.Test Result


Product	Subscriber End Equipment HGW	Test Engineer	Milo Li
Test Site	TR3	Test Date	2020/08/24~2020/09/08

Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	Limit	Result
802.11b	1Mbps	01	2412	30dBc	Pass
802.11b	1Mbps	06	2437	30dBc	Pass
802.11b	1Mbps	11	2462	30dBc	Pass
802.11g	6Mbps	01	2412	30dBc	Pass
802.11g	6Mbps	06	2437	30dBc	Pass
802.11g	6Mbps	11	2462	30dBc	Pass
802.11n-HT20	MCS0	01	2412	30dBc	Pass
802.11n-HT20	MCS0	06	2437	30dBc	Pass
802.11n-HT20	MCS0	11	2462	30dBc	Pass
802.11n-HT40	MCS0	03	2422	30dBc	Pass
802.11n-HT40	MCS0	06	2437	30dBc	Pass
802.11n-HT40	MCS0	09	2452	30dBc	Pass


802.11b Out-of-Band Emissions - Ant 0 / Ant 0 + 1

Channel 01 (2412MHz)


100kHz PSD Reference Level

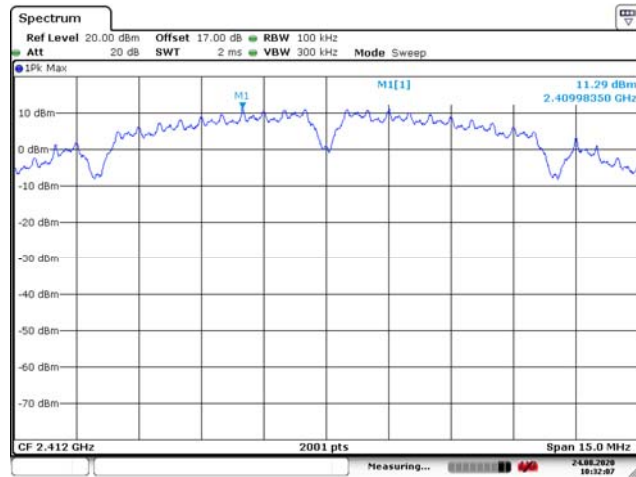

Low Band Edge

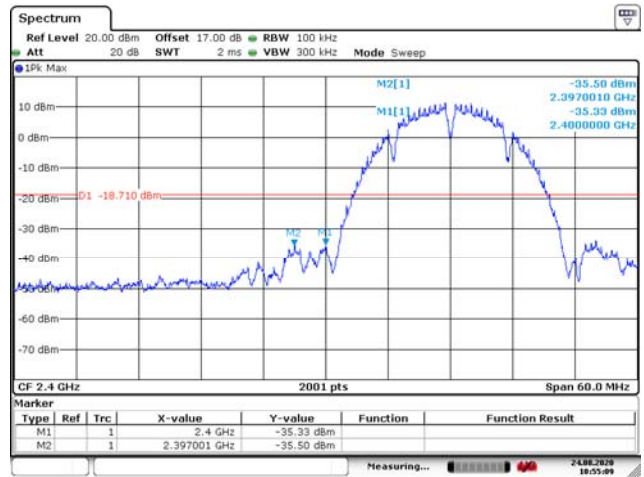


Spurious Emission

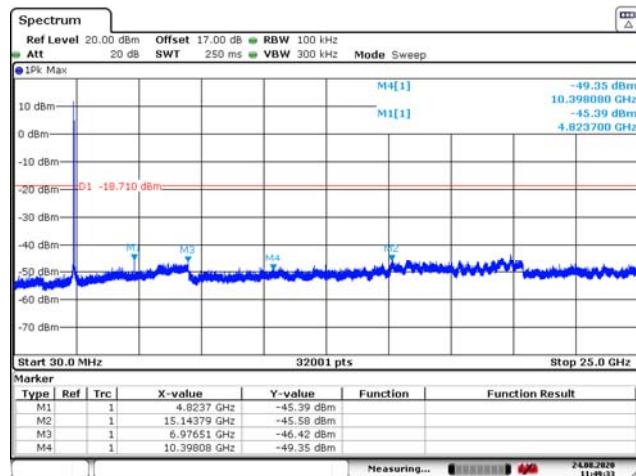


802.11b Out-of-Band Emissions - Ant 0 / Ant 0 + 1

Channel 06 (2437MHz)

100kHz PSD Reference Level

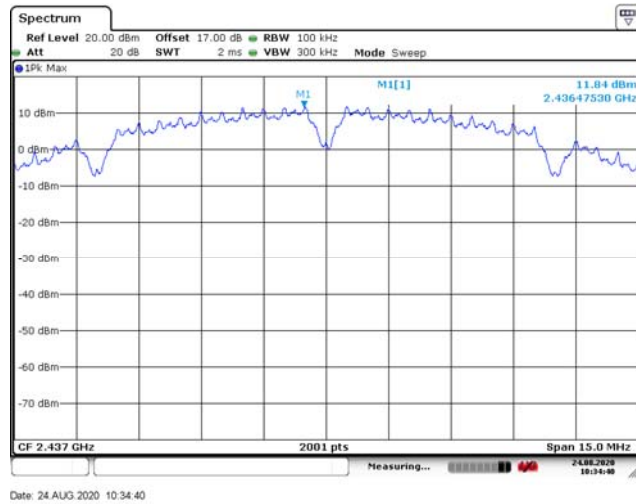


Spurious Emission

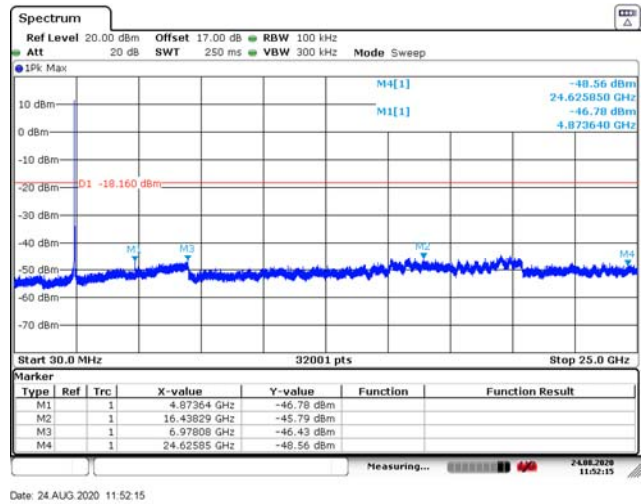


802.11b Out-of-Band Emissions - Ant 0 / Ant 0 + 1

Channel 11 (2462MHz)


100kHz PSD Reference Level

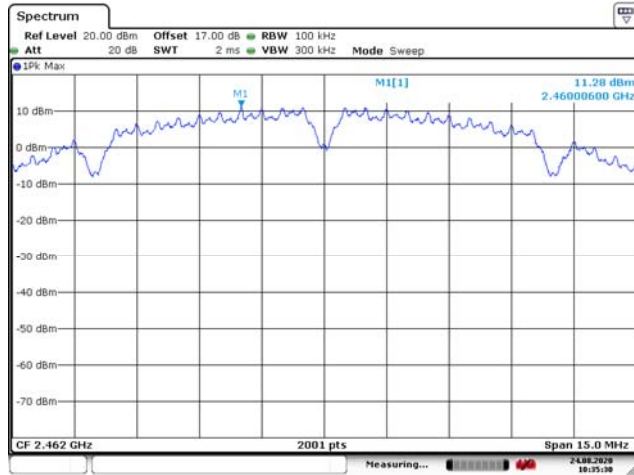

High Band Edge

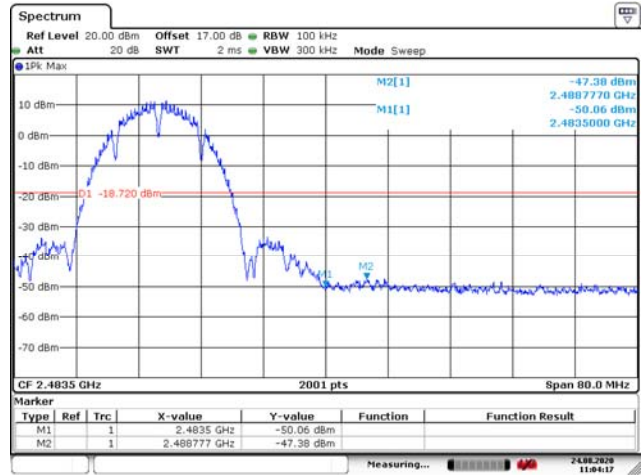


Spurious Emission

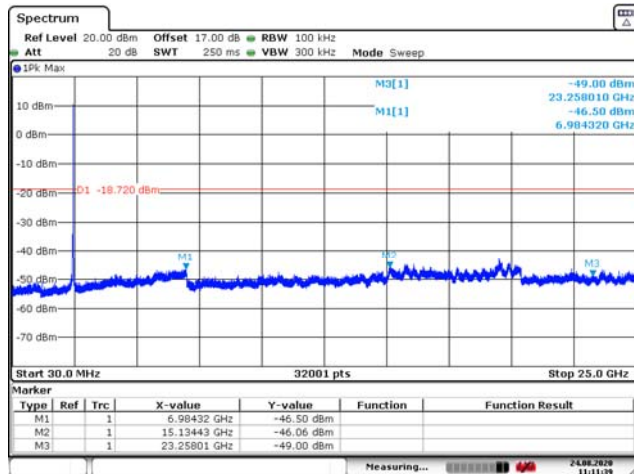


802.11g Out-of-Band Emissions - Ant 0 / Ant 0 + 1

Channel 01 (2412MHz)


100kHz PSD Reference Level

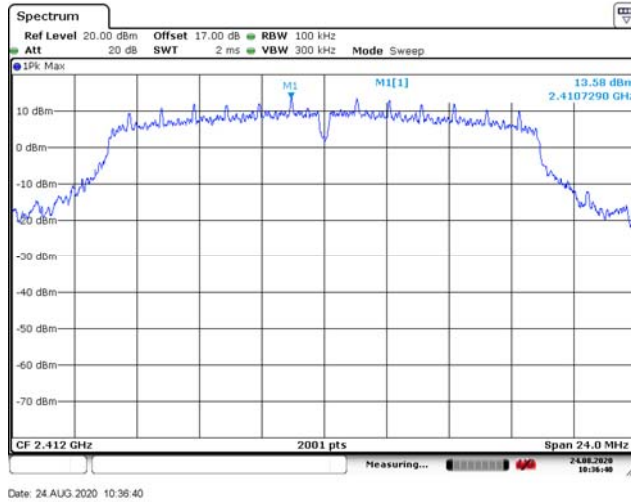

Low Band Edge

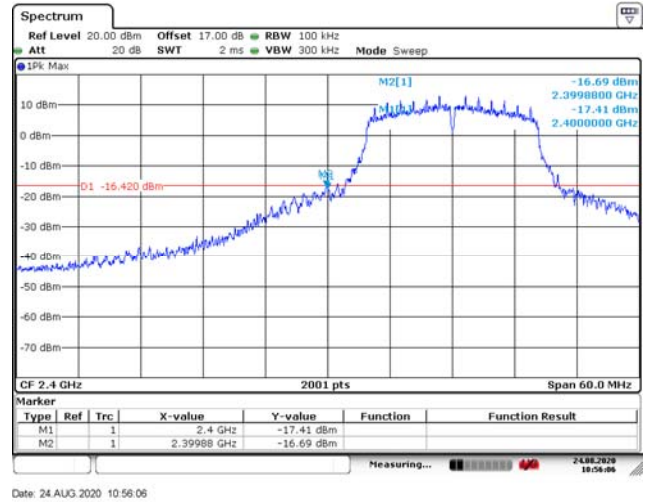


Spurious Emission

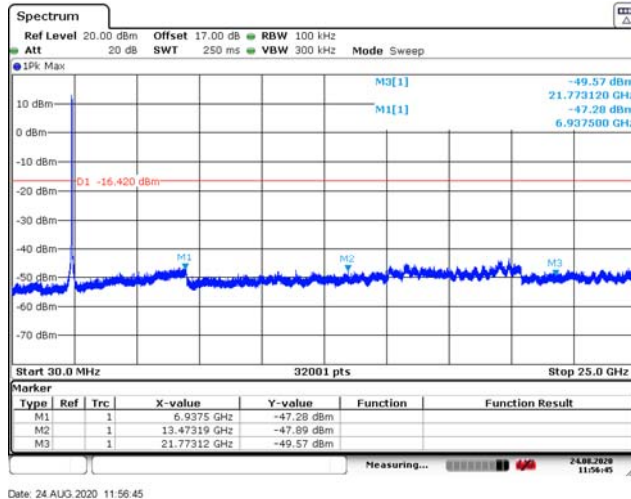


802.11g Out-of-Band Emissions - Ant 0 / Ant 0 + 1

Channel 06 (2437MHz)

100kHz PSD Reference Level

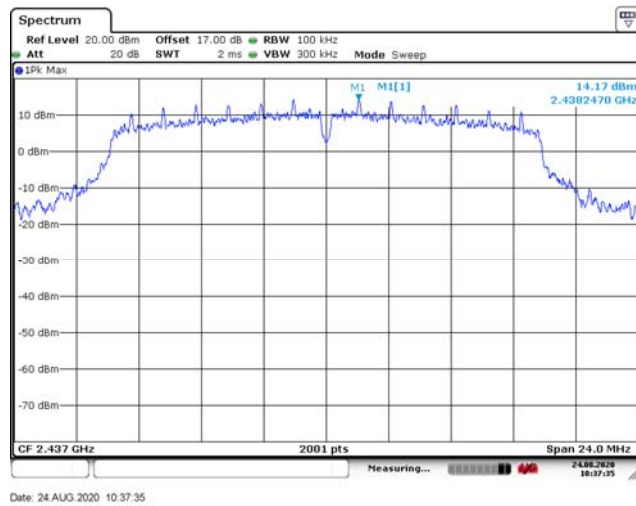


Spurious Emission

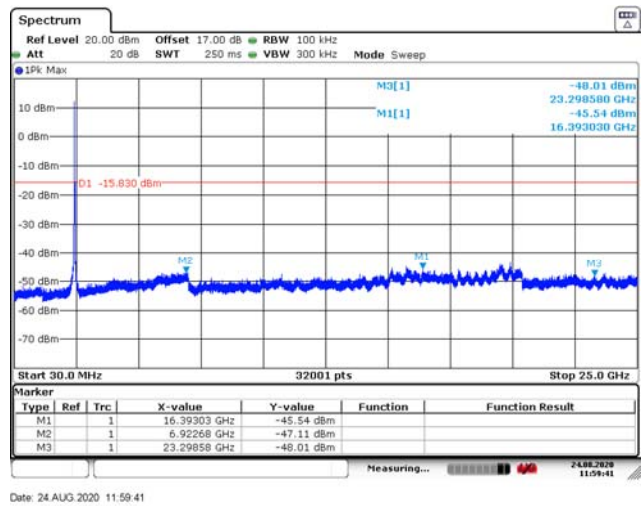


802.11g Out-of-Band Emissions - Ant 0 / Ant 0 + 1

Channel 11 (2462MHz)


100kHz PSD Reference Level

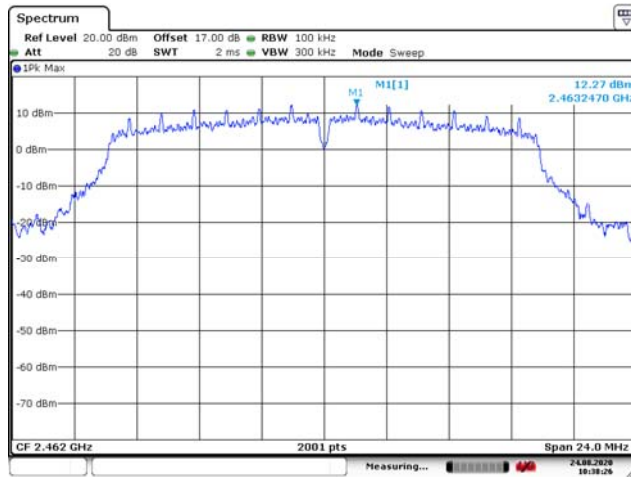

High Band Edge

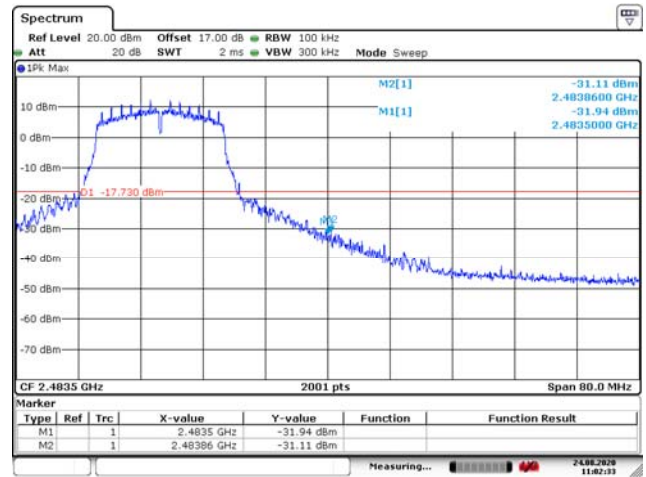


Spurious Emission

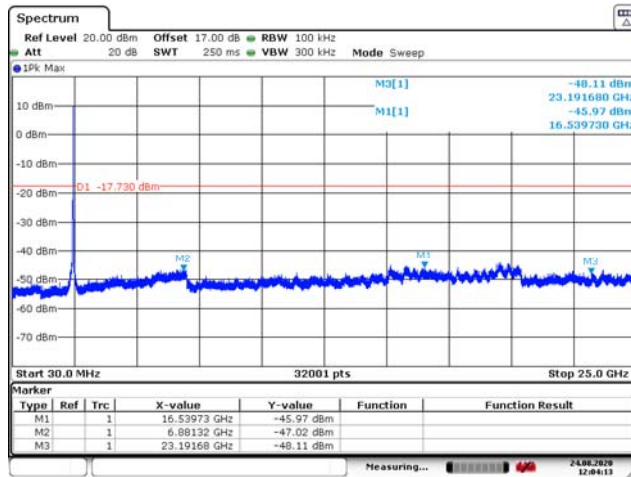


802.11n-HT20 Out-of-Band Emissions - Ant 0 / Ant 0 + 1

Channel 01 (2412MHz)


100kHz PSD Reference Level

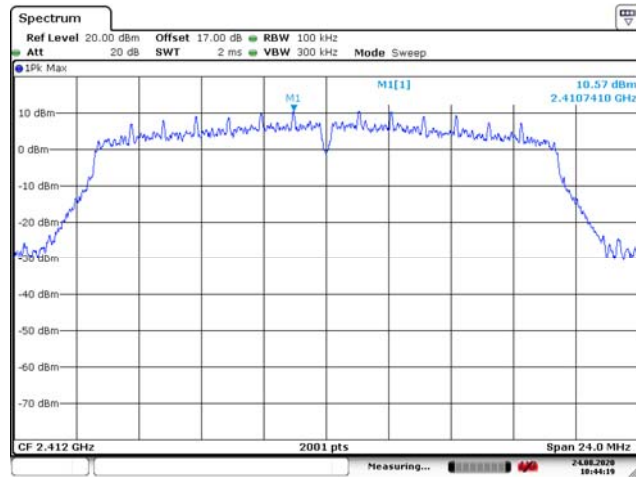

Low Band Edge

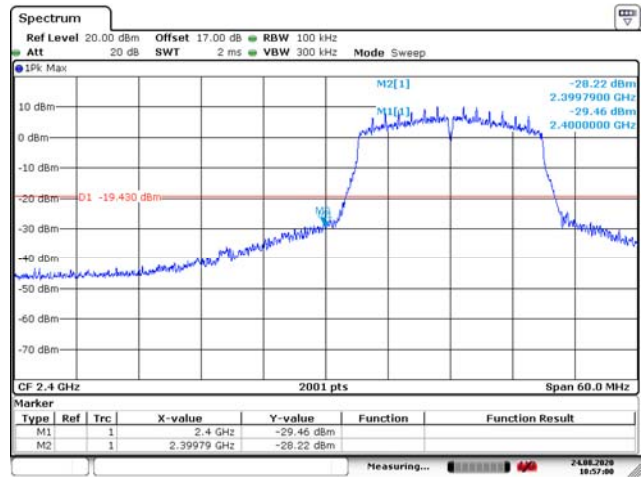


Spurious Emission

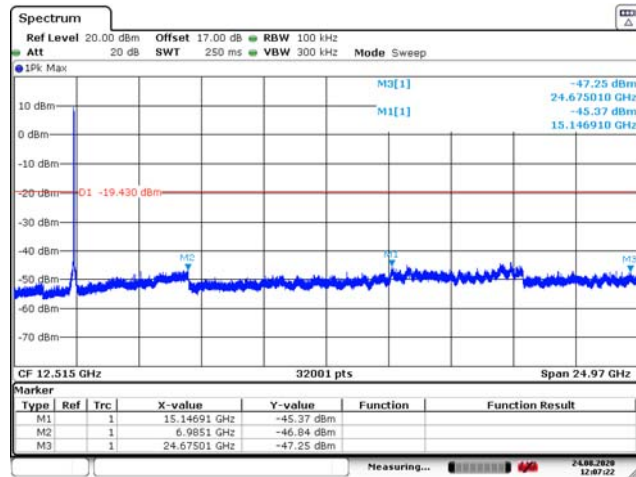


802.11n-HT20 Out-of-Band Emissions - Ant 0 / Ant 0 + 1

Channel 06 (2437MHz)

100kHz PSD Reference Level

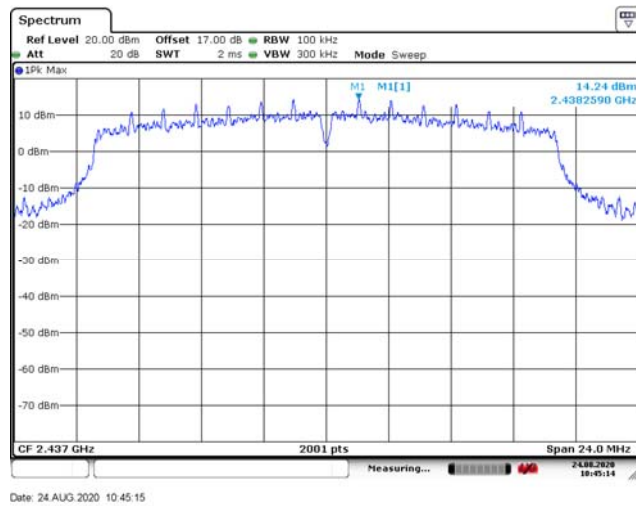


Spurious Emission

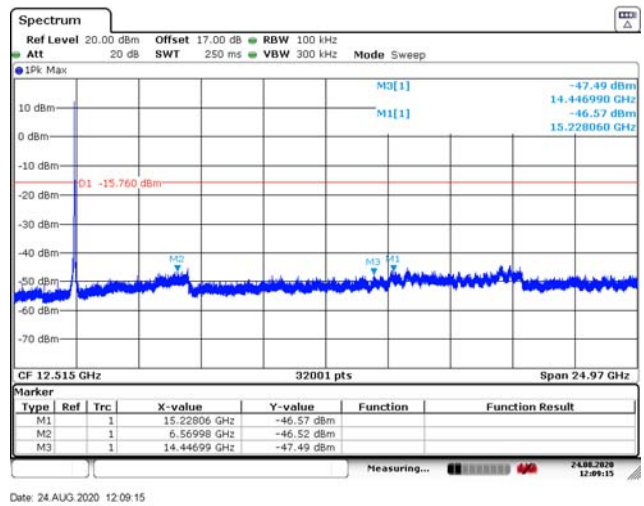


802.11n-HT20 Out-of-Band Emissions - Ant 0 / Ant 0 + 1

Channel 11 (2462MHz)


100kHz PSD Reference Level

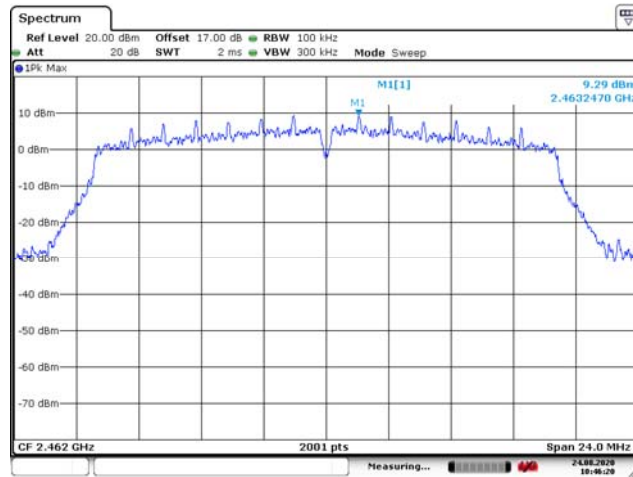

High Band Edge

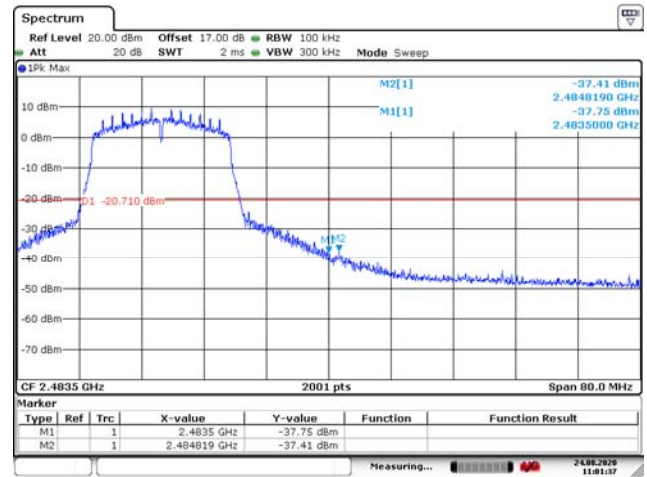


Spurious Emission

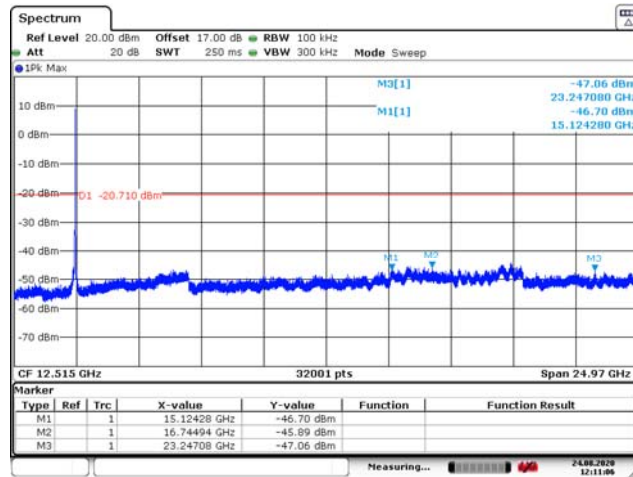

802.11n-HT40 Out-of-Band Emissions - Ant 0 / Ant 0 + 1


Channel 03 (2422MHz)

100kHz PSD Reference Level

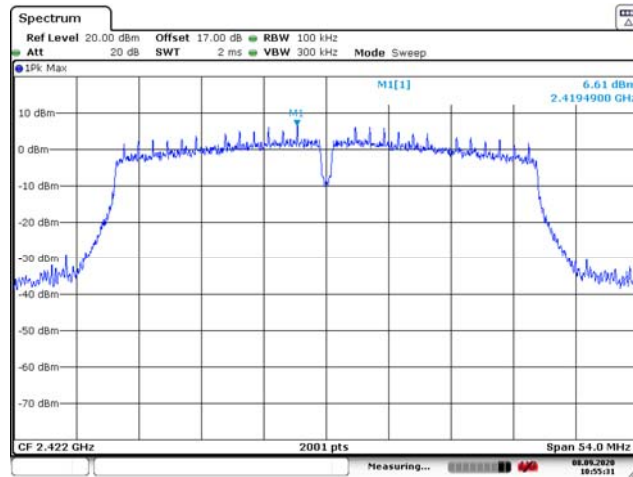


Date: 8 SEP 2020 10:55:31

Low Band Edge

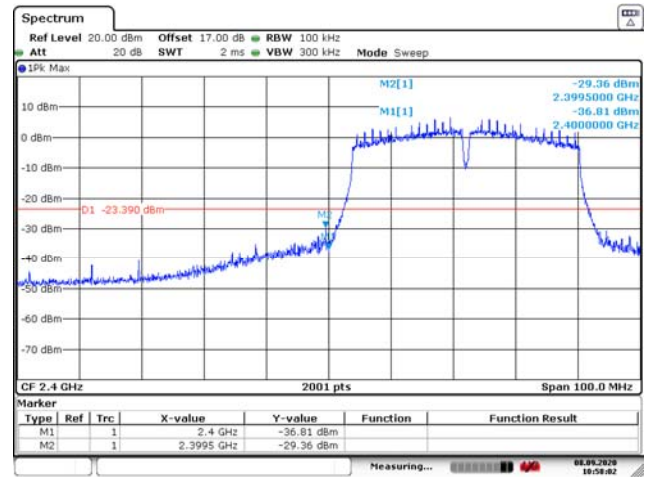

Date: 8 SEP 2020 10:58:02

Spurious Emission

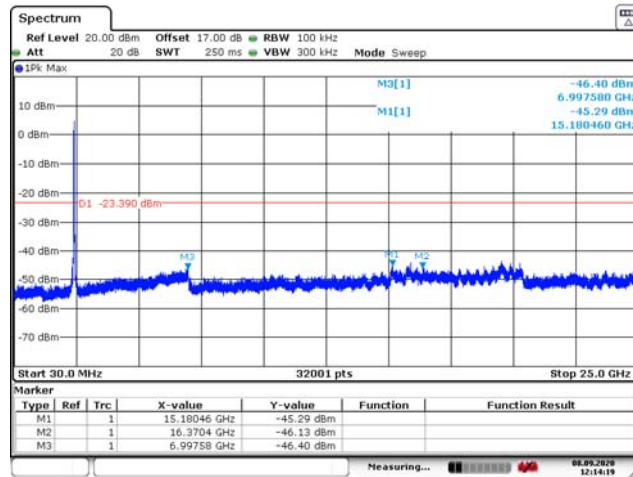


Date: 8 SEP 2020 12:14:19


802.11n-HT40 Out-of-Band Emissions - Ant 0 / Ant 0 + 1

Channel 06 (2437MHz)

100kHz PSD Reference Level

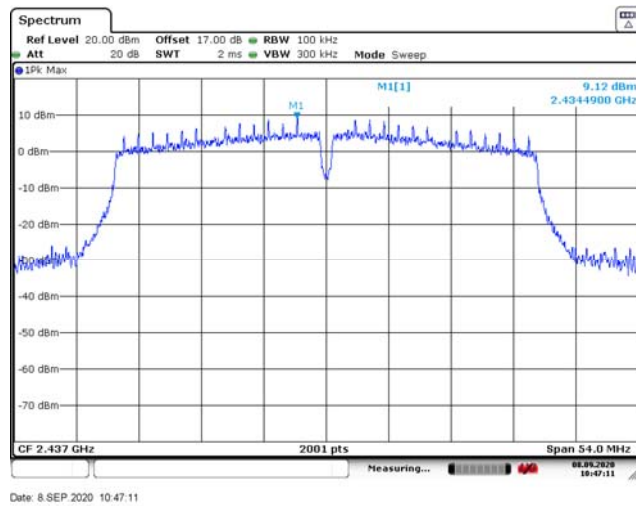


Spurious Emission

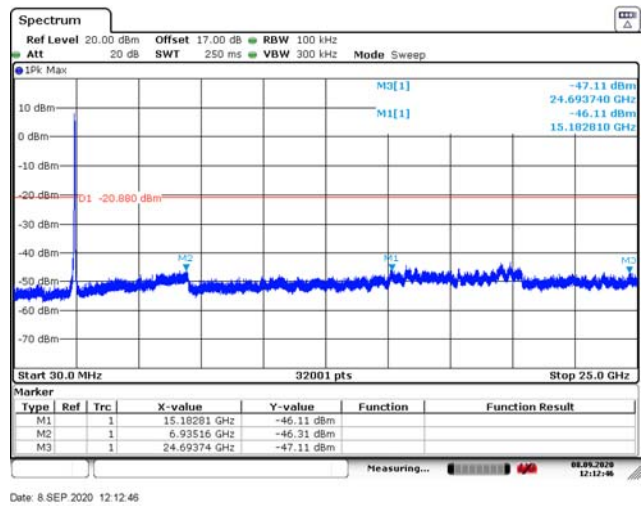


802.11n-HT40 Out-of-Band Emissions - Ant 0 / Ant 0 + 1

Channel 09 (2452MHz)


100kHz PSD Reference Level

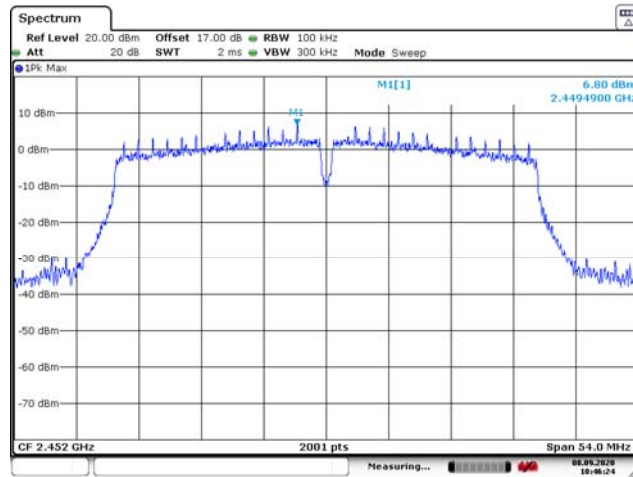

High Band Edge

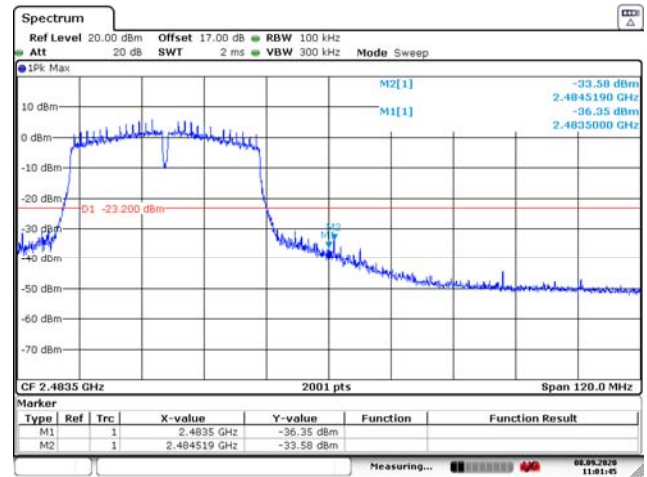


Spurious Emission

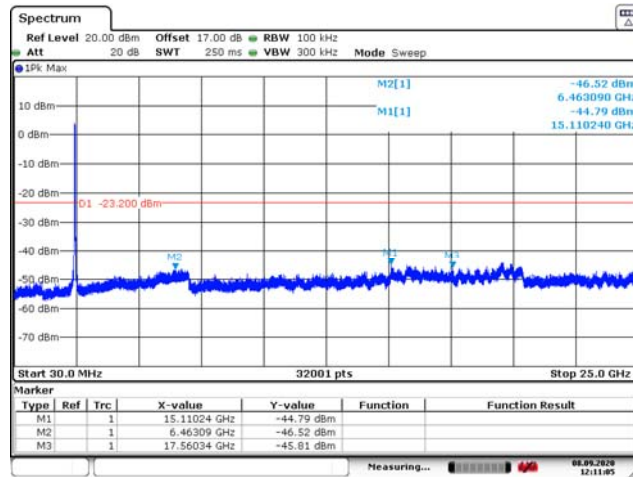


802.11b Out-of-Band Emissions - Ant 1 / Ant 0 + 1

Channel 01 (2412MHz)


100kHz PSD Reference Level

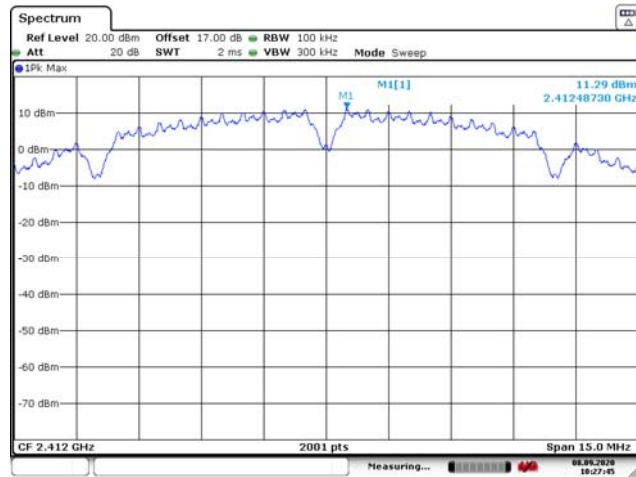

Low Band Edge

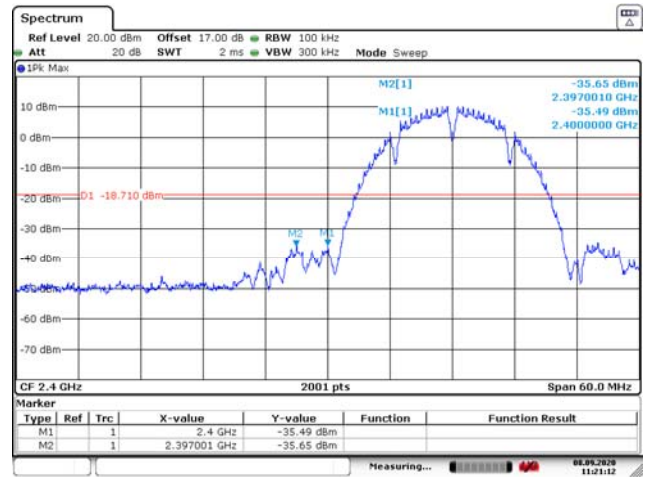


Spurious Emission

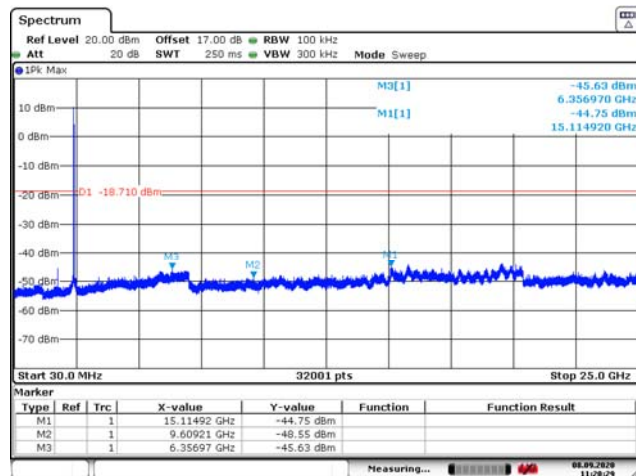


802.11b Out-of-Band Emissions - Ant 1 / Ant 0 + 1

Channel 06 (2437MHz)

100kHz PSD Reference Level

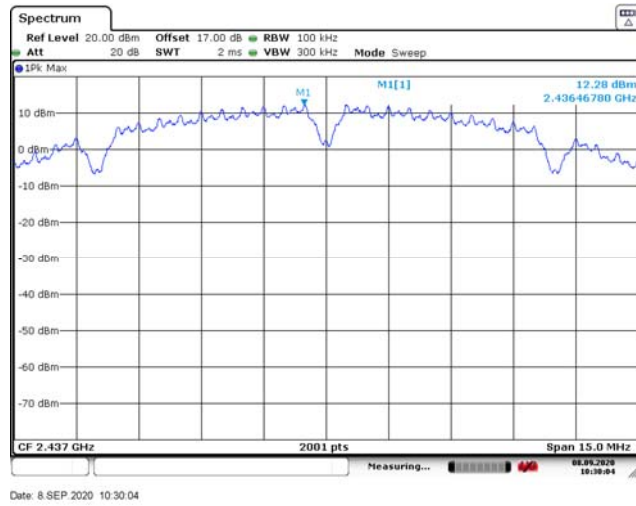


Spurious Emission

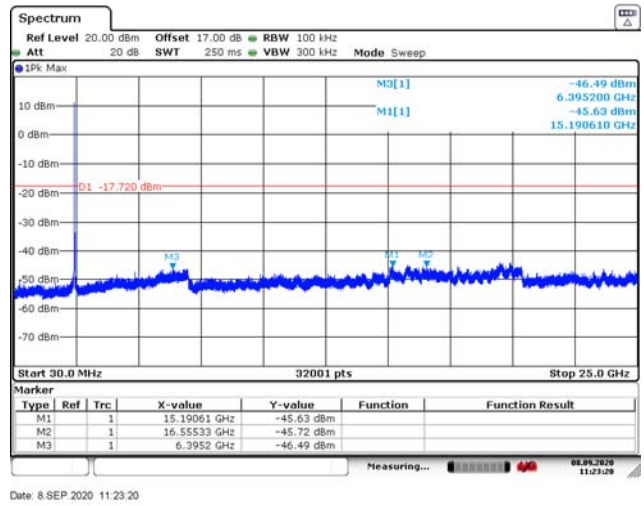

802.11b Out-of-Band Emissions - Ant 1 / Ant 0 + 1


Channel 11 (2462MHz)

100kHz PSD Reference Level

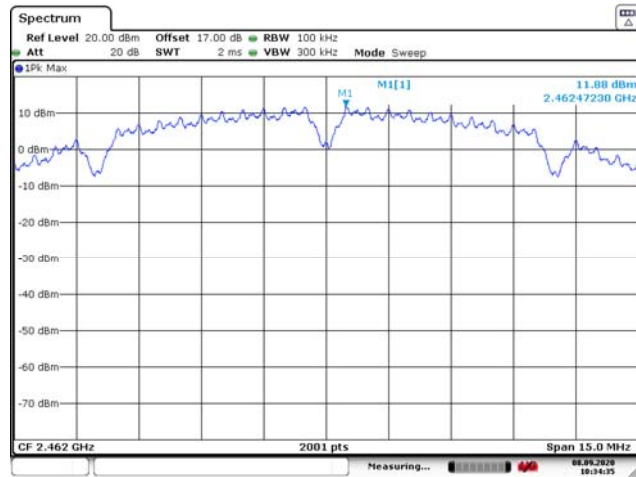


Date: 8 SEP 2020 10:34:35

High Band Edge

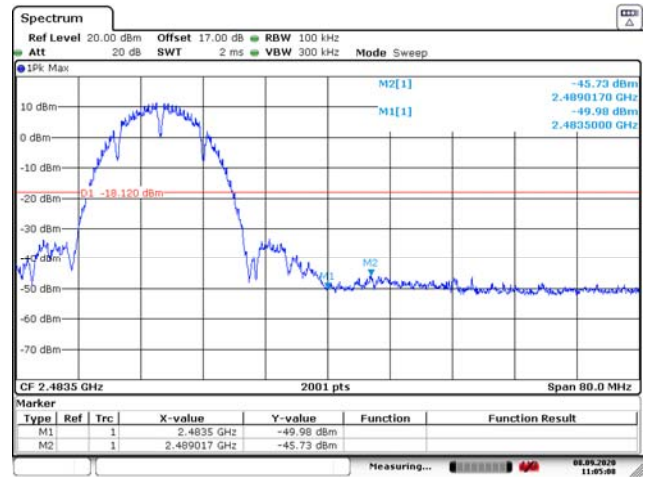

Date: 8 SEP 2020 11:05:08

Spurious Emission

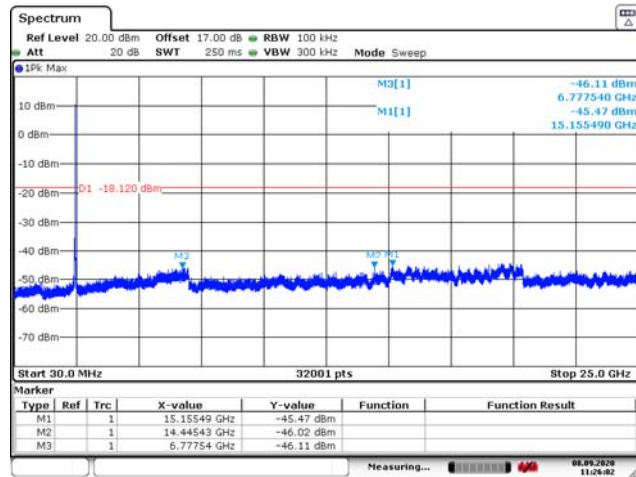


Date: 8 SEP 2020 11:26:02


802.11g Out-of-Band Emissions - Ant 1 / Ant 0 + 1

Channel 01 (2412MHz)


100kHz PSD Reference Level

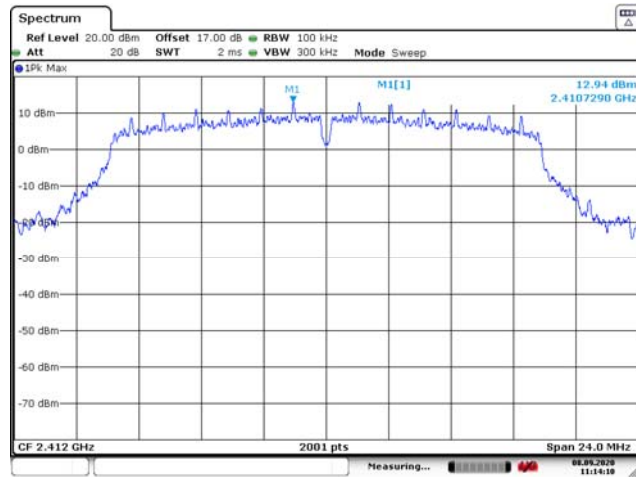

Low Band Edge

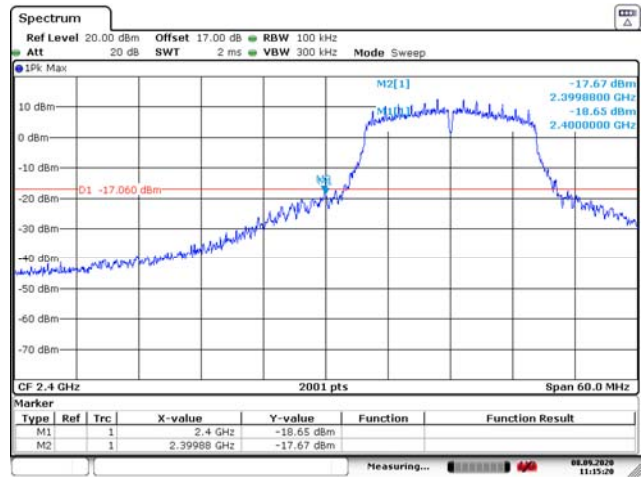


Spurious Emission

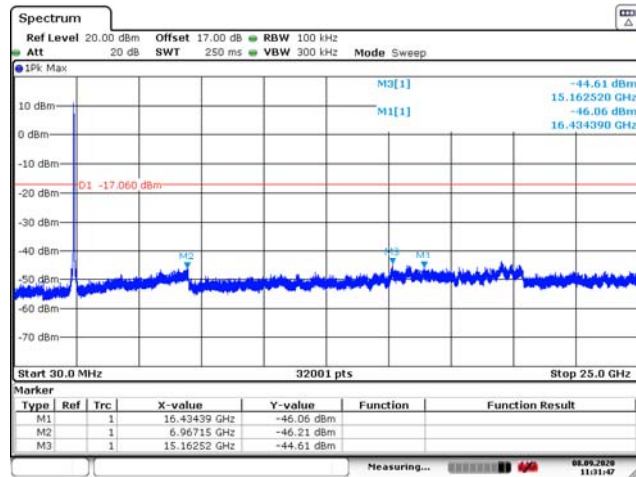


802.11g Out-of-Band Emissions - Ant 1 / Ant 0 + 1

Channel 06 (2437MHz)

100kHz PSD Reference Level

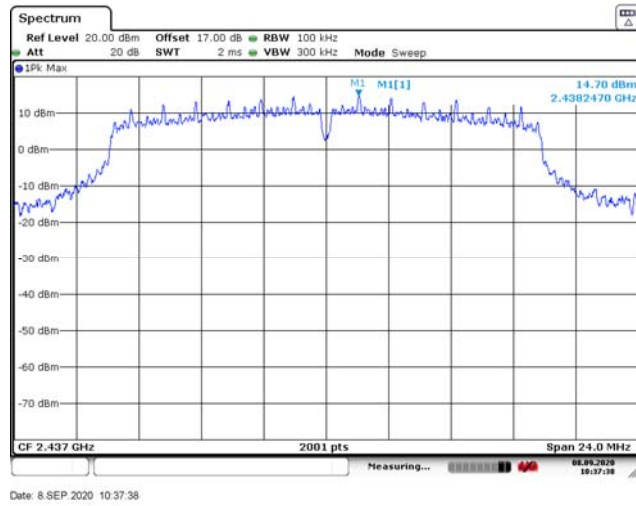


Spurious Emission

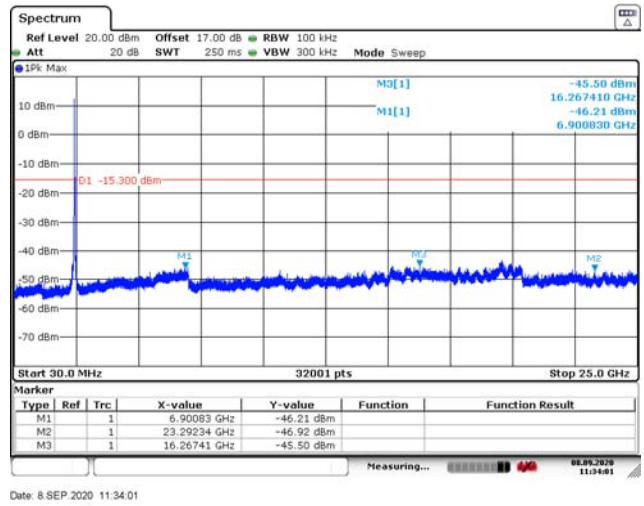


802.11g Out-of-Band Emissions - Ant 1 / Ant 0 + 1

Channel 11 (2462MHz)


100kHz PSD Reference Level

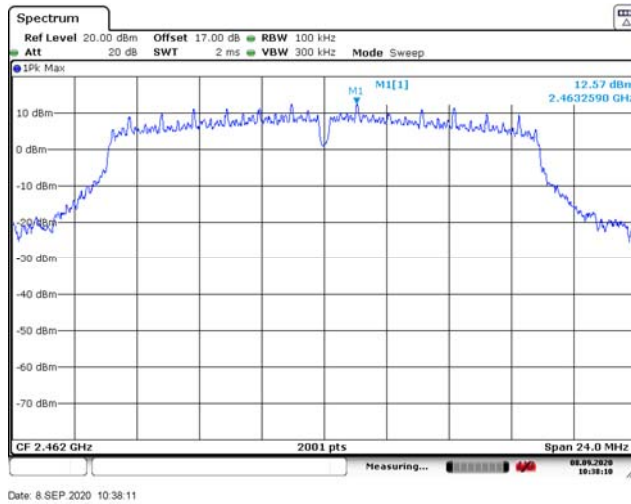

High Band Edge

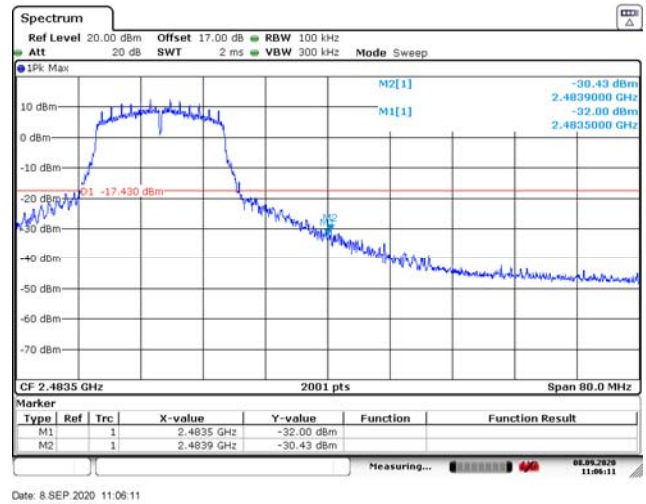


Spurious Emission

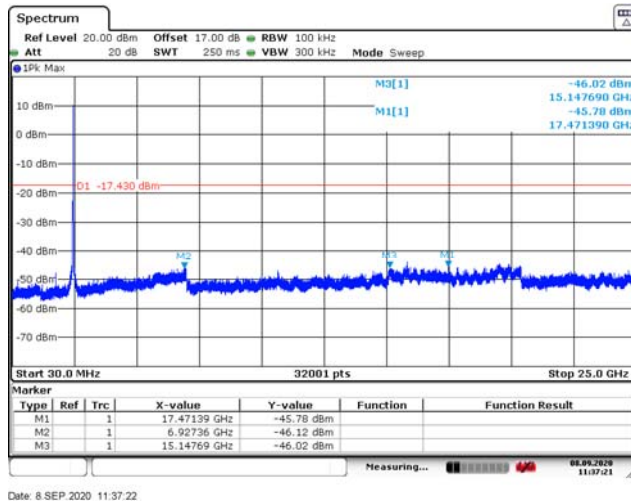


802.11n-HT20 Out-of-Band Emissions - Ant 1 / Ant 0 + 1

Channel 01 (2412MHz)


100kHz PSD Reference Level

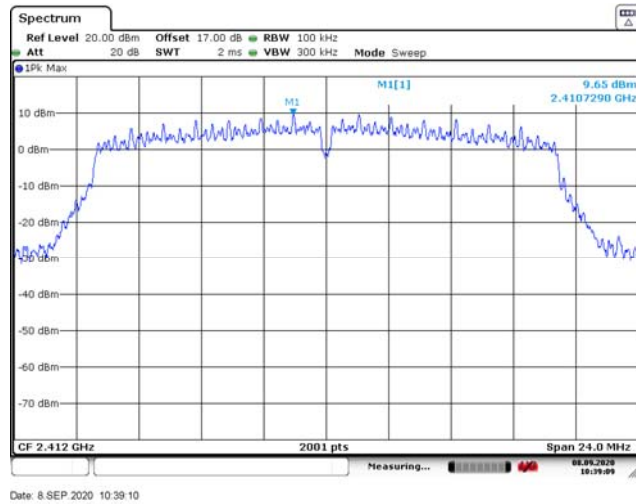

Low Band Edge

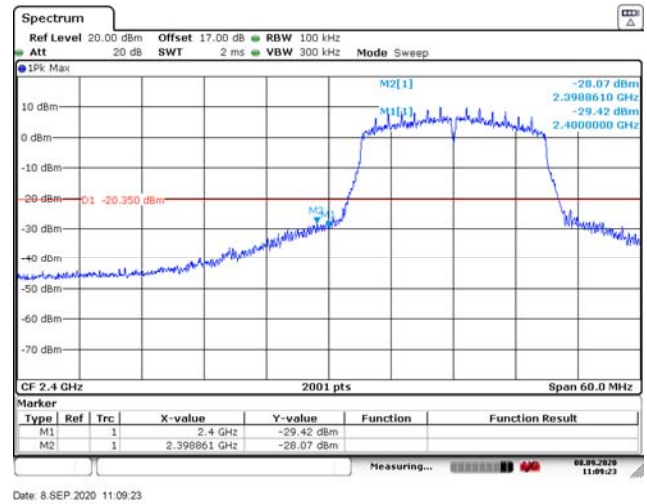


Spurious Emission

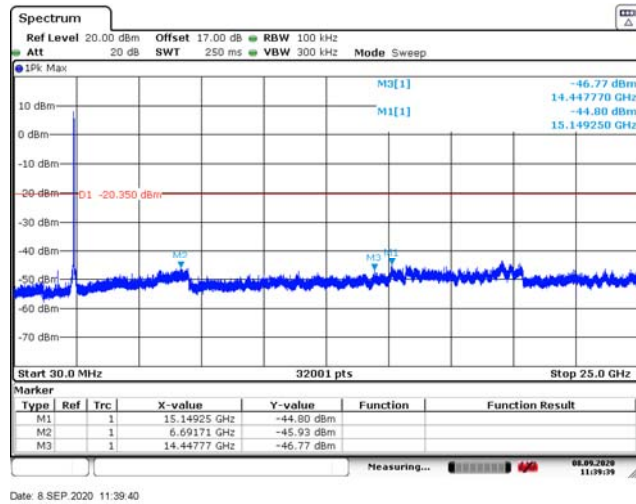


802.11n-HT20 Out-of-Band Emissions - Ant 1 / Ant 0 + 1

Channel 06 (2437MHz)

100kHz PSD Reference Level

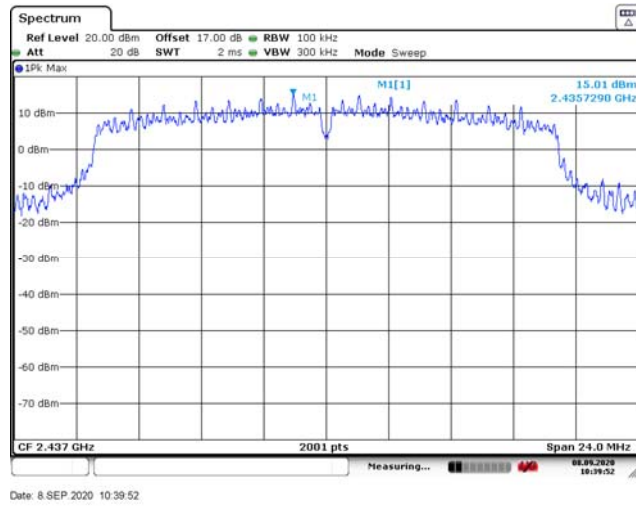


Spurious Emission

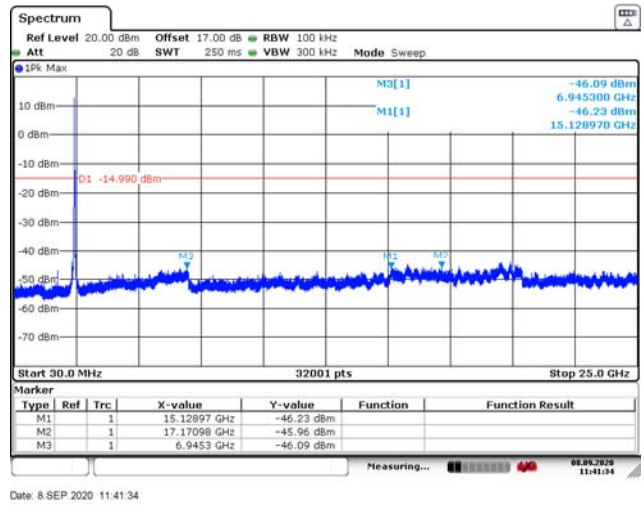


802.11n-HT20 Out-of-Band Emissions - Ant 1 / Ant 0 + 1

Channel 11 (2462MHz)


100kHz PSD Reference Level

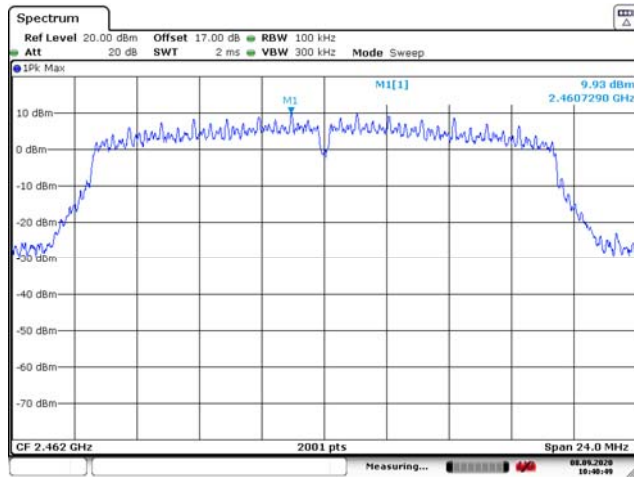

High Band Edge

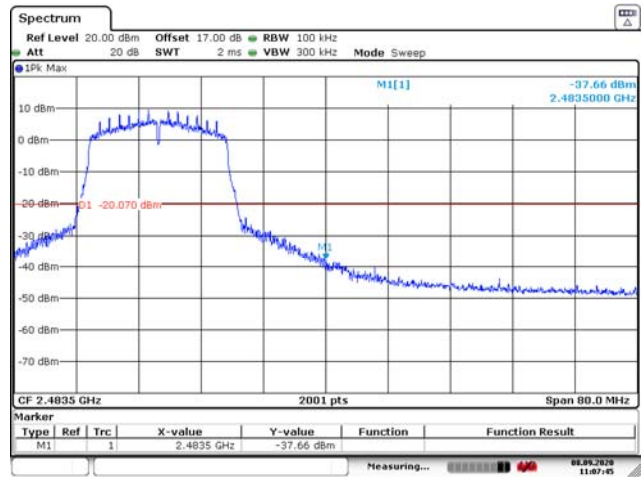


Spurious Emission

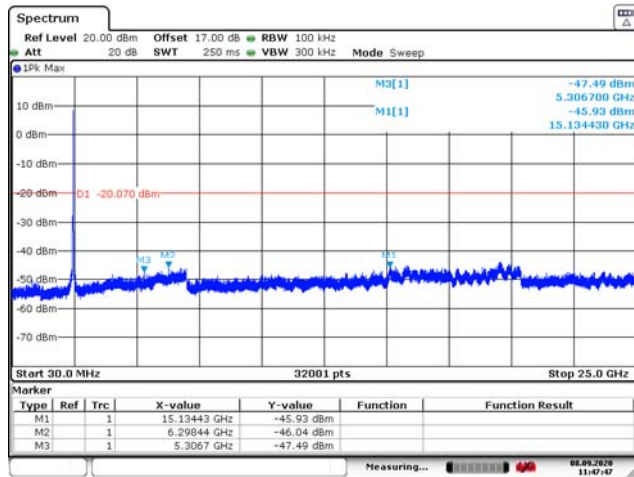


802.11n-HT40 Out-of-Band Emissions - Ant 1 / Ant 0 + 1

Channel 03 (2422MHz)


100kHz PSD Reference Level

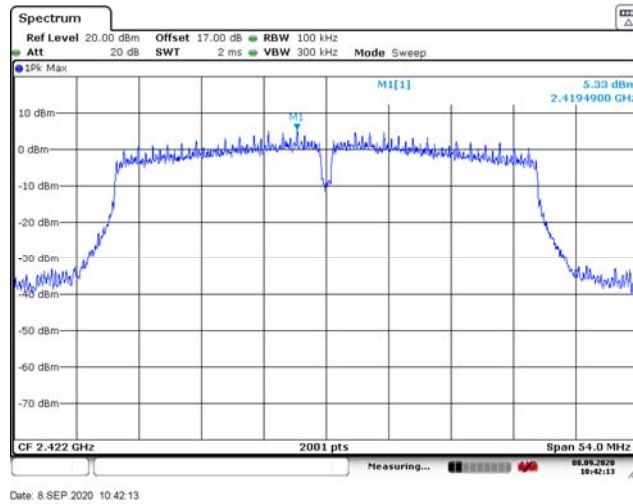

Low Band Edge

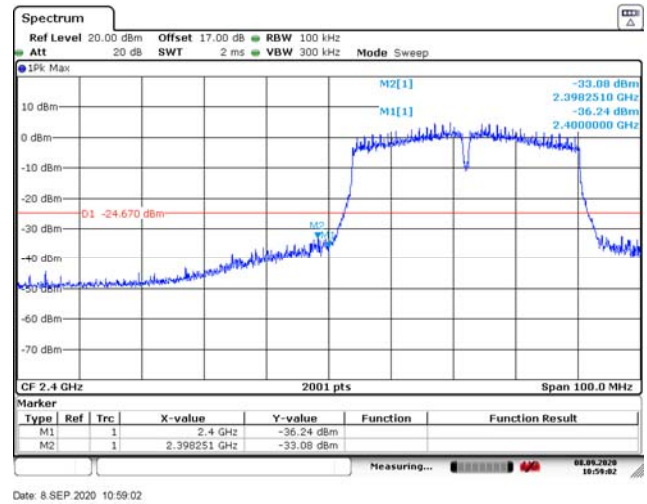


Spurious Emission

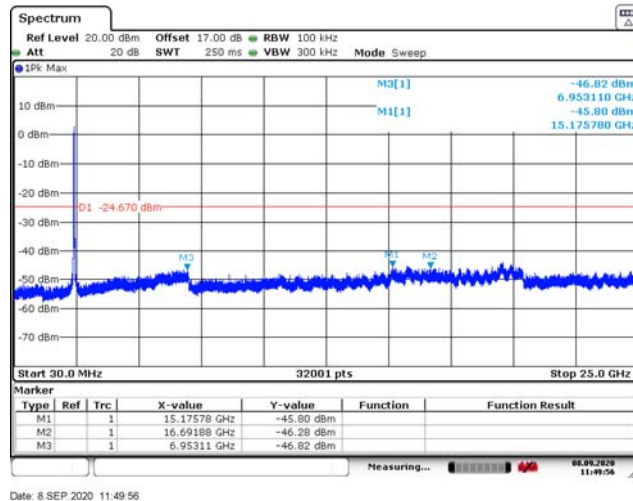


802.11n-HT40 Out-of-Band Emissions - Ant 1 / Ant 0 + 1

Channel 06 (2437MHz)

100kHz PSD Reference Level

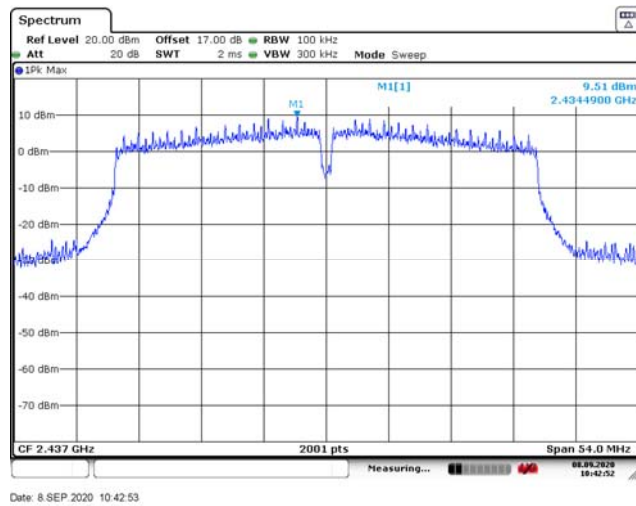


Spurious Emission

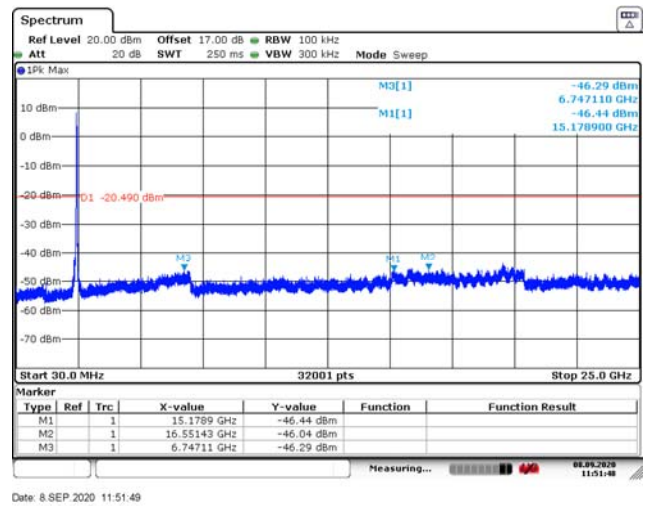


802.11n-HT40 Out-of-Band Emissions - Ant 1 / Ant 0 + 1

Channel 09 (2452MHz)


100kHz PSD Reference Level

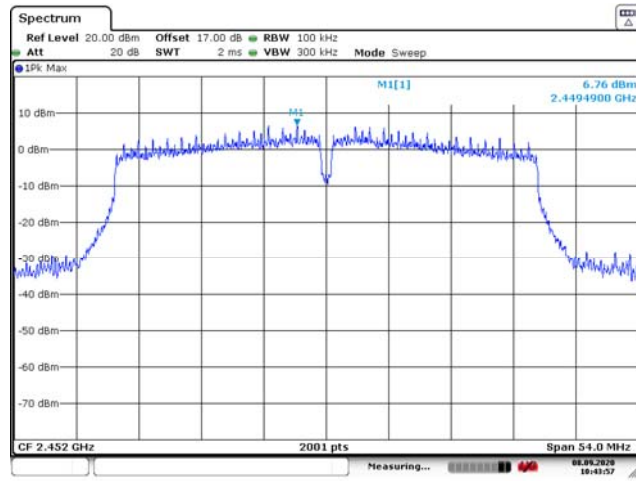

High Band Edge

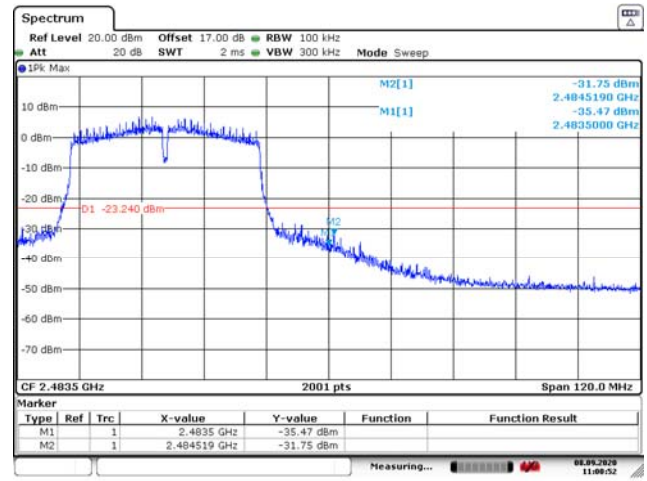

Spurious Emission

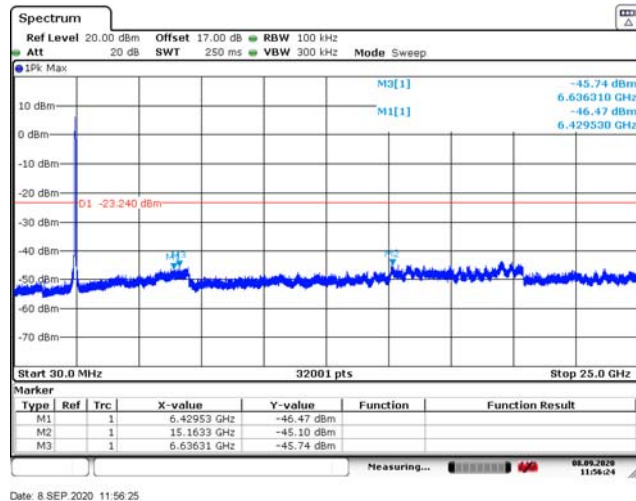

6.6. Radiated Spurious Emission Measurement

6.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.6.2. Test Procedure Used

ANSI C63.10-2013 Section 6.3& 6.4

6.6.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set $\text{VBW} \geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

6.6.4. Test Setup

Below 1GHz Test Setup:

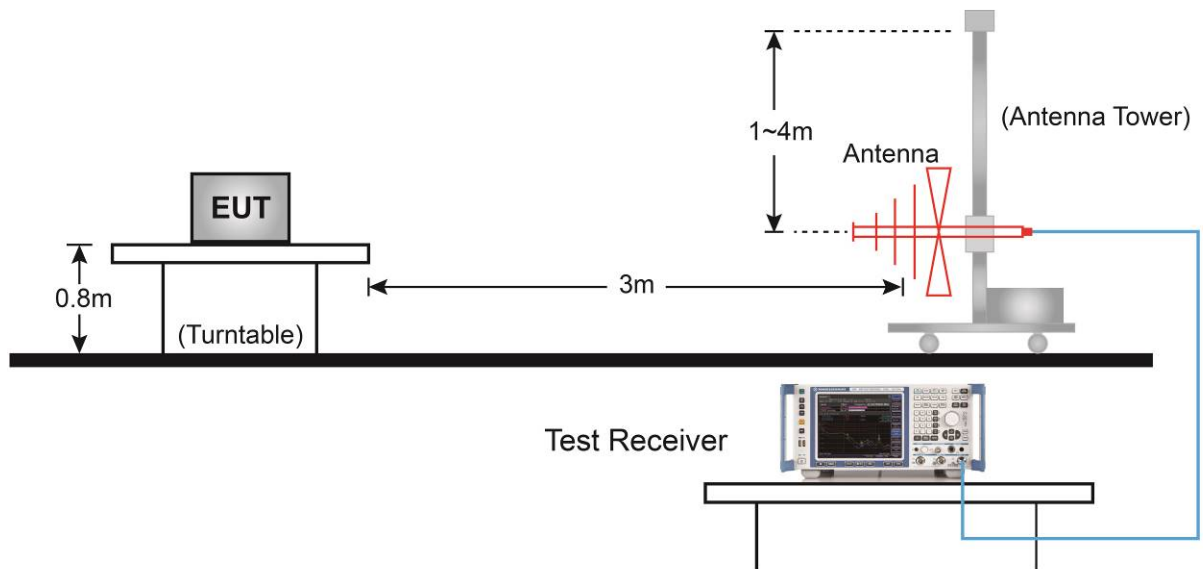

Above 1GHz Test Setup:

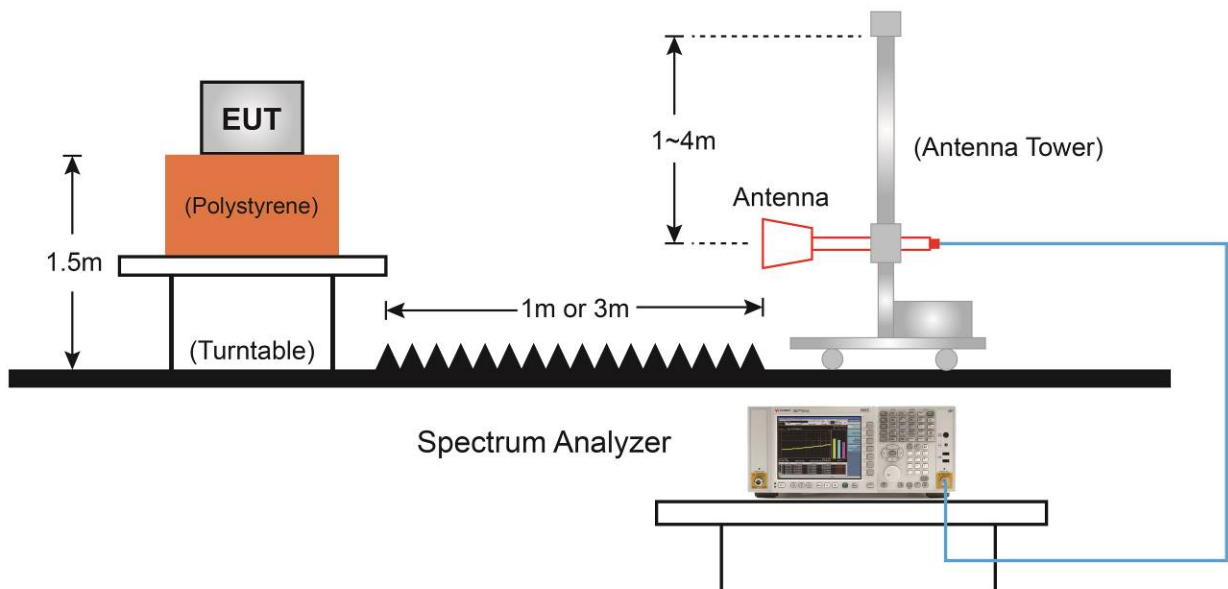

6.6.5. Test Result

Product	Subscriber End Equipment HGW	Test Engineer	Antony Yang
Test Site	AC1	Test Date	2020/08/20
Test Mode:	802.11b (CDD Mode)	Test Channel:	01
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4825.0	43.7	5.8	49.5	74.0	-24.5	Peak	Horizontal
*	7885.0	38.6	11.1	49.7	74.0	-24.3	Peak	Horizontal
	8335.5	36.4	11.0	47.4	74.0	-26.6	Peak	Horizontal
*	8803.0	38.2	13.0	51.2	74.0	-22.8	Peak	Horizontal
	4824.1	50.2	5.7	55.9	74.0	-18.1	Peak	Vertical
	4824.1	47.8	5.7	53.5	54.0	-0.5	Average	Vertical
	7519.5	37.5	10.9	48.4	74.0	-25.6	Peak	Vertical
*	7919.0	37.9	11.3	49.2	74.0	-24.8	Peak	Vertical
*	8709.5	36.3	12.9	49.2	74.0	-24.8	Peak	Vertical

Note 1: "*" means test frequency did not fall into restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Subscriber End Equipment HGW	Test Engineer	Antony Yang
Test Site	AC1	Test Date	2020/08/20
Test Mode:	802.11b (CDD Mode)	Test Channel:	06
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4876.0	40.8	5.5	46.3	74.0	-27.7	Peak	Horizontal
*	6346.5	37.8	8.1	45.9	74.0	-28.1	Peak	Horizontal
	7366.5	38.5	10.9	49.4	74.0	-24.6	Peak	Horizontal
*	7893.5	35.9	11.0	46.9	74.0	-27.1	Peak	Horizontal
	4874.0	49.7	5.5	55.2	74.0	-18.8	Peak	Vertical
	4874.0	47.6	5.5	53.1	54.0	-0.9	Average	Vertical
*	6508.0	36.4	8.6	45.0	74.0	-29.0	Peak	Vertical
	7307.0	40.4	10.6	51.0	74.0	-23.0	Peak	Vertical
*	8607.5	35.8	12.2	48.0	74.0	-26.0	Peak	Vertical

Note 1: "*" means test frequency did not fall into restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Subscriber End Equipment HGW	Test Engineer	Antony Yang
Test Site	AC1	Test Date	2020/08/20
Test Mode:	802.11b (CDD Mode)	Test Channel:	11
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4927.0	43.1	6.2	49.3	74.0	-24.7	Peak	Horizontal
*	6346.5	37.2	8.1	45.3	74.0	-28.7	Peak	Horizontal
	7451.5	37.4	11.0	48.4	74.0	-25.6	Peak	Horizontal
*	8794.5	35.9	12.9	48.8	74.0	-25.2	Peak	Horizontal
	4924.1	47.5	6.1	53.6	74.0	-20.4	Peak	Vertical
	4924.1	46.3	6.1	52.4	54.0	-1.6	Average	Vertical
*	7171.0	37.1	10.7	47.8	74.0	-26.2	Peak	Vertical
	7502.5	36.5	10.8	47.3	74.0	-26.7	Peak	Vertical
*	8871.0	35.1	12.9	48.0	74.0	-26.0	Peak	Vertical

Note 1: "*" means test frequency did not fall into restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Subscriber End Equipment HGW	Test Engineer	Buter Shi
Test Site	AC1	Test Date	2020/08/18
Test Mode:	802.11g (CDD Mode)	Test Channel:	01
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4825.0	42.8	5.8	48.6	74.0	-25.4	Peak	Horizontal
*	6380.5	37.4	7.9	45.3	74.0	-28.7	Peak	Horizontal
	7443.0	36.8	11.0	47.8	74.0	-26.2	Peak	Horizontal
*	8820.0	35.4	13.2	48.6	74.0	-25.4	Peak	Horizontal
	4825.0	47.5	5.8	53.3	74.0	-20.7	Peak	Vertical
*	6431.5	40.1	8.3	48.4	74.0	-25.6	Peak	Vertical
	7596.0	37.0	10.8	47.8	74.0	-26.2	Peak	Vertical
*	9797.5	35.2	15.2	50.4	74.0	-23.6	Peak	Vertical

Note 1: "*" means test frequency did not fall into restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Subscriber End Equipment HGW	Test Engineer	Buter Shi
Test Site	AC1	Test Date	2020/08/18
Test Mode:	802.11g (CDD Mode)	Test Channel:	06
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4876.0	47.1	5.5	52.6	74.0	-21.4	Peak	Horizontal
*	5930.0	37.3	7.2	44.5	74.0	-29.5	Peak	Horizontal
	7536.5	37.0	10.8	47.8	74.0	-26.2	Peak	Horizontal
*	8607.5	36.8	12.2	49.0	74.0	-25.0	Peak	Horizontal
	4872.9	51.3	5.6	56.9	74.0	-17.1	Peak	Vertical
	4872.9	38.7	5.6	44.3	54.0	-9.7	Average	Vertical
*	6431.5	39.6	8.3	47.9	74.0	-26.1	Peak	Vertical
	7315.5	41.1	10.6	51.7	74.0	-22.3	Peak	Vertical
*	9670.0	35.9	14.5	50.4	74.0	-23.6	Peak	Vertical

Note 1: "*" means test frequency did not fall into restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Subscriber End Equipment HGW	Test Engineer	Buter Shi
Test Site	AC1	Test Date	2020/08/18
Test Mode:	802.11g (CDD Mode)	Test Channel:	11
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4825.0	37.8	5.8	43.6	74.0	-30.4	Peak	Horizontal
*	5913.0	36.6	7.1	43.7	74.0	-30.3	Peak	Horizontal
	7400.5	35.0	10.7	45.7	74.0	-28.3	Peak	Horizontal
*	9712.5	35.2	15.0	50.2	74.0	-23.8	Peak	Horizontal
	4927.0	39.6	6.2	45.8	74.0	-28.2	Peak	Vertical
*	6431.5	38.5	8.3	46.8	74.0	-27.2	Peak	Vertical
	7426.0	36.6	10.8	47.4	74.0	-26.6	Peak	Vertical
*	9874.0	36.0	15.6	51.6	74.0	-22.4	Peak	Vertical

Note 1: “*” means test frequency did not fall into restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Subscriber End Equipment HGW	Test Engineer	Buter Shi
Test Site	AC1	Test Date	2020/08/18
Test Mode:	802.11n-HT20 (CDD Mode)	Test Channel:	01
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4816.5	38.9	5.8	44.7	74.0	-29.3	Peak	Horizontal
*	5879.0	37.1	6.9	44.0	74.0	-30.0	Peak	Horizontal
	7341.0	37.0	10.9	47.9	74.0	-26.1	Peak	Horizontal
*	8675.5	36.7	12.6	49.3	74.0	-24.7	Peak	Horizontal
	4825.0	41.9	5.8	47.7	74.0	-26.3	Peak	Vertical
*	6431.5	39.7	8.3	48.0	74.0	-26.0	Peak	Vertical
	7519.5	37.6	10.9	48.5	74.0	-25.5	Peak	Vertical
*	8650.0	36.5	12.9	49.4	74.0	-24.6	Peak	Vertical

Note 1: "*" means test frequency did not fall into restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Subscriber End Equipment HGW	Test Engineer	Buter Shi
Test Site	AC1	Test Date	2020/08/18
Test Mode:	802.11n-HT20 (CDD Mode)	Test Channel:	06
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4876.0	46.9	5.5	52.4	74.0	-21.6	Peak	Horizontal
*	6754.5	37.3	8.9	46.2	74.0	-27.8	Peak	Horizontal
	7349.5	37.6	10.9	48.5	74.0	-25.5	Peak	Horizontal
*	8565.0	37.2	12.0	49.2	74.0	-24.8	Peak	Horizontal
	4876.1	48.5	5.5	54.0	74.0	-20.0	Peak	Vertical
	4876.1	34.7	5.5	40.2	54.0	-13.8	Average	Vertical
*	6431.5	38.6	8.3	46.9	74.0	-27.1	Peak	Vertical
	7307.0	39.0	10.6	49.6	74.0	-24.4	Peak	Vertical
*	8692.5	36.2	13.1	49.3	74.0	-24.7	Peak	Vertical

Note 1: "*" means test frequency did not fall into restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Subscriber End Equipment HGW	Test Engineer	Buter Shi
Test Site	AC1	Test Date	2020/08/18
Test Mode:	802.11n-HT20 (CDD Mode)	Test Channel:	11
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4825.0	38.2	5.8	44.0	74.0	-30.0	Peak	Horizontal
*	5921.5	37.2	7.1	44.3	74.0	-29.7	Peak	Horizontal
	7502.5	36.7	10.8	47.5	74.0	-26.5	Peak	Horizontal
*	9848.5	35.8	15.4	51.2	74.0	-22.8	Peak	Horizontal
	4927.0	40.2	6.2	46.4	74.0	-27.6	Peak	Vertical
*	6431.5	38.8	8.3	47.1	74.0	-26.9	Peak	Vertical
	7392.0	36.8	10.7	47.5	74.0	-26.5	Peak	Vertical
*	9882.5	34.6	15.4	50.0	74.0	-24.0	Peak	Vertical

Note 1: "*" means test frequency did not fall into restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Subscriber End Equipment HGW	Test Engineer	Buter Shi
Test Site	AC1	Test Date	2020/08/18
Test Mode:	802.11n-HT40 (CDD Mode)	Test Channel:	03
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4842.0	40.6	5.9	46.5	74.0	-27.5	Peak	Horizontal
*	6431.5	37.8	8.3	46.1	74.0	-27.9	Peak	Horizontal
	7349.5	36.8	10.9	47.7	74.0	-26.3	Peak	Horizontal
*	8947.5	36.8	13.0	49.8	74.0	-24.2	Peak	Horizontal
	4842.0	42.9	5.9	48.8	74.0	-25.2	Peak	Vertical
*	6431.5	39.5	8.3	47.8	74.0	-26.2	Peak	Vertical
	7443.0	36.5	11.0	47.5	74.0	-26.5	Peak	Vertical
*	8709.5	36.4	12.9	49.3	74.0	-24.7	Peak	Vertical

Note 1: "*" means test frequency did not fall into restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Subscriber End Equipment HGW	Test Engineer	Buter Shi
Test Site	AC1	Test Date	2020/08/18
Test Mode:	802.11n-HT40 (CDD Mode)	Test Channel:	06
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4867.5	43.3	5.6	48.9	74.0	-25.1	Peak	Horizontal
*	6346.5	37.3	8.1	45.4	74.0	-28.6	Peak	Horizontal
	7519.5	35.1	10.9	46.0	74.0	-28.0	Peak	Horizontal
*	8573.5	36.8	12.2	49.0	74.0	-25.0	Peak	Horizontal
	4876.0	46.2	5.5	51.7	74.0	-22.3	Peak	Vertical
*	6431.5	38.8	8.3	47.1	74.0	-26.9	Peak	Vertical
	7315.5	38.6	10.6	49.2	74.0	-24.8	Peak	Vertical
*	8709.5	35.5	12.9	48.4	74.0	-25.6	Peak	Vertical

Note 1: "*" means test frequency did not fall into restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Subscriber End Equipment HGW	Test Engineer	Buter Shi
Test Site	AC1	Test Date	2020/08/18
Test Mode:	802.11n-HT40 (CDD Mode)	Test Channel:	09
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4901.5	39.6	5.8	45.4	74.0	-28.6	Peak	Horizontal
*	6431.5	39.7	8.3	48.0	74.0	-26.0	Peak	Horizontal
	7502.5	37.1	10.8	47.9	74.0	-26.1	Peak	Horizontal
*	8641.5	37.6	12.5	50.1	74.0	-23.9	Peak	Horizontal
	4901.5	39.6	5.8	45.4	74.0	-28.6	Peak	Vertical
*	6431.5	39.7	8.3	48.0	74.0	-26.0	Peak	Vertical
	7502.5	37.1	10.8	47.9	74.0	-26.1	Peak	Vertical
*	8709.5	35.3	12.9	48.2	74.0	-25.8	Peak	Vertical


Note 1: “*” means test frequency did not fall into restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission below 1GHz:

Site: AC1	Time: 2020/08/16 - 12:51
Limit: FCC_Part15.209_RSE(3m)	Engineer: Antony Yang
Probe: AC1_VULB 9168 _30-1000MHz	Polarity: Horizontal
EUT: Subscriber End Equipment HGW	Power: AC 120V/60Hz
Worst Case Mode: Transmit by 802.11n-HT20 at Channel 2412MHz	

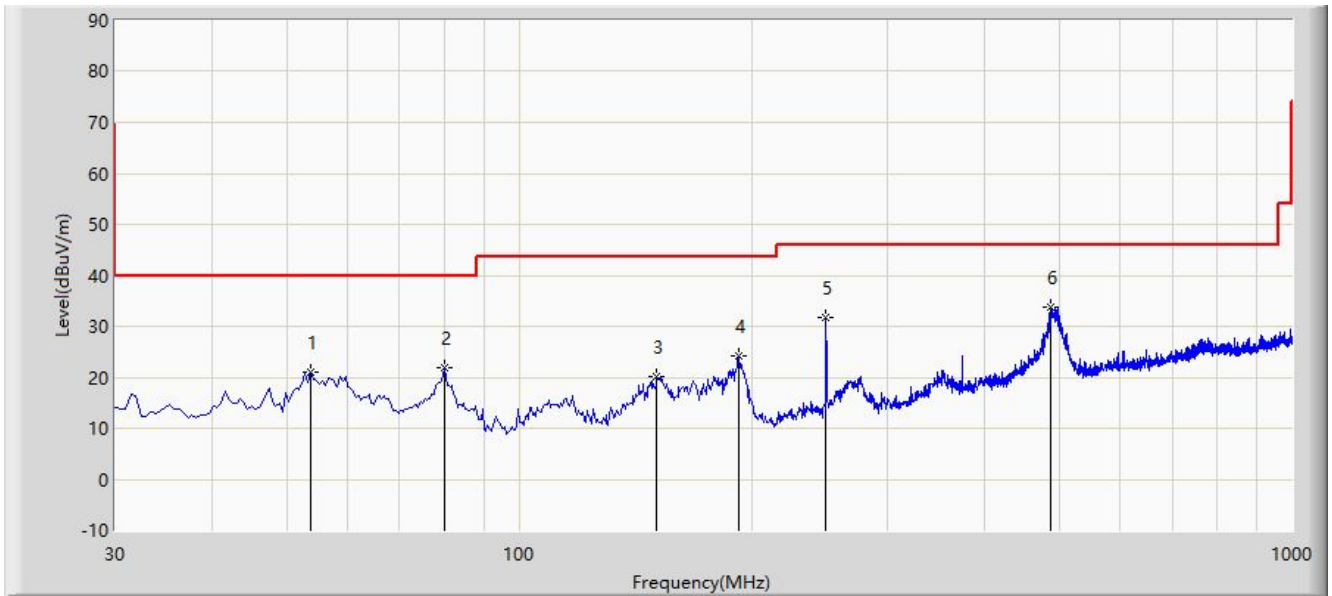

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			53.765	21.064	6.609	-18.936	40.000	14.456	PK
2			79.955	21.960	11.875	-18.040	40.000	10.084	PK
3			150.765	20.243	5.847	-23.257	43.500	14.396	PK
4			192.475	24.271	12.736	-19.229	43.500	11.535	PK
5			249.705	31.761	18.756	-14.239	46.000	13.005	PK
6		*	488.325	33.706	14.353	-12.294	46.000	19.352	PK

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The amplitude of radiated emissions (frequency range from 9kHz ~ 30MHz, 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.