

# FCC PART 15.249


## EMI MEASUREMENT AND TEST REPORT

For

### SHENZHEN KONLIKA ELECTRONICS CO., LTD.

3/F., No.6 Building Baimenqian Industrial Area, Shawan Town,  
Shenzhen, P.R.China

**FCC ID: P5BGLJ-2306**

<b>This Report Concerns:</b> <input checked="" type="checkbox"/> Original Report	<b>Equipment Type:</b> 2.4G Wireless Monitor and Camera- Transmitter
<b>Test Engineer:</b> Ming Jing / 	
<b>Report No.:</b> R0404212(T)	
<b>Report Date:</b> 2004-05-18	
<b>Reviewed By:</b> Ling Zhang / 	
<b>Prepared By:</b> Bay Area Compliance Laboratory Corporation 230 Commercial Street Sunnyvale, CA 94085 Tel (408) 732-9162 Fax (408) 732-9164	

**Note:** This test report is specially limited to the above client company and the product model only. It may not be duplicated without prior written consent of Bay Area Compliance Laboratory Corporation. This report **must not** be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

**TABLE OF CONTENTS**

<b>GENERAL INFORMATION.....</b>	<b>3</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	3
OBJECTIVE .....	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY .....	3
TEST FACILITY .....	3
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>5</b>
DESCRIPTION OF TEST CONFIGURATION .....	5
EQUIPMENT MODIFICATIONS .....	5
CONFIGURATION OF TEST SYSTEM .....	5
TEST SETUP BLOCK DIAGRAM.....	5
POWER SUPPLY INFORMATION.....	6
<b>SUMMARY OF TEST RESULTS .....</b>	<b>7</b>
<b>§15.203 - ANTENNA REQUIREMENT.....</b>	<b>8</b>
STANDARD APPLICABLE .....	8
ANTENNA CONNECTED CONSTRUCTION .....	8
<b>§ 15.249 (C) - CONDUCTED EMISSIONS TEST DATA .....</b>	<b>9</b>
MEASUREMENT UNCERTAINTY .....	9
EUT SETUP.....	9
SPECTRUM ANALYZER SETUP .....	9
TEST EQUIPMENT LIST AND DETAILS.....	9
TEST PROCEDURE .....	9
ENVIRONMENTAL CONDITIONS .....	10
SUMMARY OF TEST RESULTS .....	10
CONDUCTED EMISSIONS TEST DATA .....	10
PLOT OF CONDUCTED EMISSIONS TEST DATA .....	10
<b>§15.209(A) - RADIATED EMISSION DATA.....</b>	<b>13</b>
MEASUREMENT UNCERTAINTY .....	13
EUT SETUP.....	13
SPECTRUM ANALYZER SETUP .....	13
TEST EQUIPMENT LIST AND DETAILS.....	14
ENVIRONMENTAL CONDITIONS .....	14
TEST PROCEDURE .....	14
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	14
SUMMARY OF TEST RESULTS .....	15
RADIATED EMISSIONS TEST RESULT DATA, 3M .....	15
<b>§15.249(C) – BAND-EDGE TESTING .....</b>	<b>17</b>
STANDARD APPLICABLE .....	17
TEST PROCEDURE .....	17
TEST EQUIPMENT LIST AND DETAILS.....	17
ENVIRONMENTAL CONDITIONS .....	17
TEST RESULTS .....	17

---

## GENERAL INFORMATION

---

### Product Description for Equipment Under Test (EUT)

The *SHENZHEN KONLIKA ELECTRONICS CO., LTD.*'s product, model number: GLJ2306 / ELVS2306 or the "EUT" as referred to in this report is the transmitter part of a 2.4GHz Wireless Monitor and Camera, DXX, operating frequency 2414 – 2468 MHz. The EUT is measured approximately 10.5cm L x 8.2cm W x 9.0cm H.

*\* The test data gathered are from production sample, serial number: GLJ2306001, provided by the manufacturer.*

### Objective

This document is a test report based on the Electromagnetic Interference (EMI) tests performed on the EUT. The EMI measurements were performed according to the measurement procedure described in ANSI C63.4 - 2001.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.205, 15.207, 15.249, 15.203, and 15.209 rules.

### Related Submittal(s)/Grant(s)

No Related Submittals

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.4 - 2001, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratory, Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

### Test Facility

The Open Area Test site used by Bay Area Compliance Laboratory Corporation to collect radiated and conducted emission measurement data is located in the back parking lot of the building at 230 Commercial Street, Sunnyvale, California, USA.

Test site at Bay Area Compliance Laboratory Corporation has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports has been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997 and Article 8 of the VCCI regulations on December 25, 1997. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2001.

The Federal Communications Commission and Voluntary Control Council for Interference has the reports on file and is listed under FCC file 31040/SIT 1300F2 and VCCI Registration No.: C-1298 and R-1234. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratory Corporation is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (NVLAP). The scope of the accreditation covers the FCC Method - 47 CFR Part 15 - Digital Devices, CISPR 22:1997 and AS/NZS 3548: Electromagnetic Interference - Limits and Methods of Measurement of Information Technology Equipment test methods under NVLAP Lab Code 200167-0.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The EUT was configured for testing according to ANSI C63.4-2001.

The final qualification test was performed with the EUT operating at normal mode

### Equipment Modifications


No modifications were made to the EUT.

### Configuration of Test System



EUT

### Test Setup Block Diagram

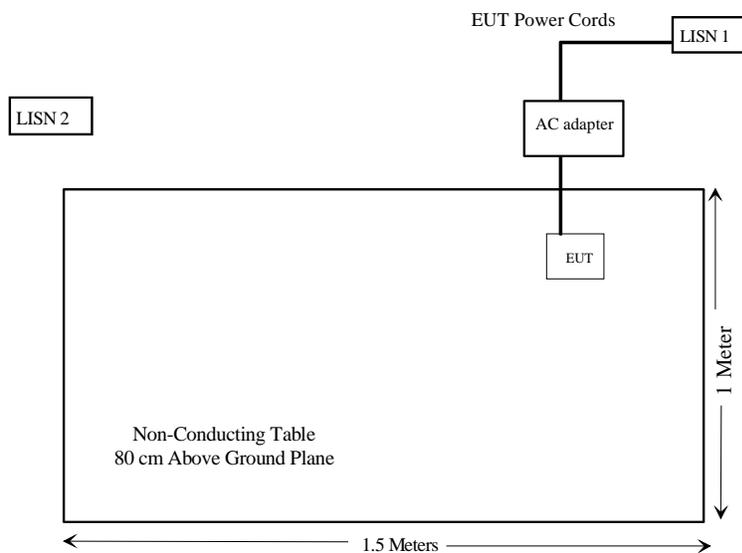

**Power Supply Information**

Manufacturer	Description	Model	Serial Number	FCC ID
Konlika	AC Adapter	47505	N/A	DOC

**SUMMARY OF TEST RESULTS**

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.203	Antenna Requirement	Compliant
§15.205	Restricted Bands of Operation	Compliant
§15.207 (a)	Conducted Emission	Compliant
§15.209 (a), §15.249 (a)	Radiated Emission	Compliant
§15.249 (c)	Band Edge Testing	Compliant

---

## **§15.203 - ANTENNA REQUIREMENT**

---

### **Standard Applicable**

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### **Antenna Connected Construction**

The antenna connector is designed with permanent attachment and no consideration of replacement.

## § 15.249 (c) - CONDUCTED EMISSIONS TEST DATA

### Measurement Uncertainty

All measurements involve certain levels of uncertainties. These uncertainties are attributed to: Spectrum analyzer, Cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the estimated uncertainty of any conducted emission measurement at BACL is  $\pm 2.4$  dB.

### EUT Setup

The measurement was performed in the shielded room, using the same setup per ANSI C63.4-2001 measurement procedure. The specification used was FCC 15 Subpart C limits.

External I/O cables were draped along the edge of the test table and bundle as required.

The EUT was connected with 120Vac/60Hz power source.

### Spectrum Analyzer Setup

The spectrum analyzer was set to investigate the spectrum from 150 kHz to 30Mhz.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Cal. Date
Rohde & Schwarz	Artificial LISN	ESH2-Z5	871884/039	2004-03-28
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2003-05-06

\* **Statement of Traceability:** BACL Corp. certifies that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

### Test Procedure

During the conducted emission test, the power cord of the host system was connected to the auxiliary outlet of the first LISN.

Maximizing procedure were performed on the six (6) highest emissions of the EUT.

All data was recorded in the peak detection mode, quasi-peak and average. Quasi-Peak readings are distinguished with an "QP". Average readings are distinguished with an "Ave".

## Environmental Conditions

Temperature:	21 °C
Relative Humidity:	38%
ATM Pressure:	1032mbar

The testing was performed by Ming Jing on 2004-04-12.

## Summary of Test Results

According to the recorded data in following table, the EUT complies with the FCC Conducted limit for a Class B device, with the *worst* margin reading of:

-21.8 dB $\mu$ V at 0.150 MHz in the Line conductor

## Conducted Emissions Test Data

Frequency MHz	LINE CONDUCTED EMISSIONS			FCC CLASS B	
	Amplitude dB $\mu$ V	Detector Qp/Ave/Peak	Phase Line/Neutral	Limit dB $\mu$ V	Margin dB
0.150	44.2	QP	Line	66	-21.8
0.150	43.5	QP	Neutral	66	-22.5
0.745	30.5	QP	Line	56	-25.5
0.755	29.5	QP	Neutral	56	-26.5
0.150	16.4	AVG	Neutral	56	-39.6
0.745	6.4	AVG	Line	46	-39.6
0.150	15.9	AVG	Line	56	-40.1
0.755	5.6	AVG	Neutral	46	-40.4
17.300	7.1	AVG	Neutral	50	-42.9
24.300	5.2	AVG	Line	50	-44.8
17.300	9.8	QP	Neutral	60	-50.2
24.300	7.5	QP	Line	60	-52.5

## Plot of Conducted Emissions Test Data

Plot of Conducted Emissions test data was presented hereinafter as reference.

Bay Area Compliance Laboratory Corp  
Class B


15. Mar 04 16:14

EUT: GLJ2306 (Transmitter)  
Manuf: Konlika  
Op Cond: Normal  
Operator: Ming  
Comment: L

Scan Settings (3 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	
150k	1M	5k	9k	QP+AV	20ms	15dB LN	OFF	
1M	5M	10k	9k	QP+AV	1ms	15dB LN	OFF	
5M	30M	100k	9k	QP+AV	1ms	15dB LN	OFF	

Final Measurement: x QP / + AV  
Meas Time: 1 s  
Subranges: 25  
Acc Margin: 6dB

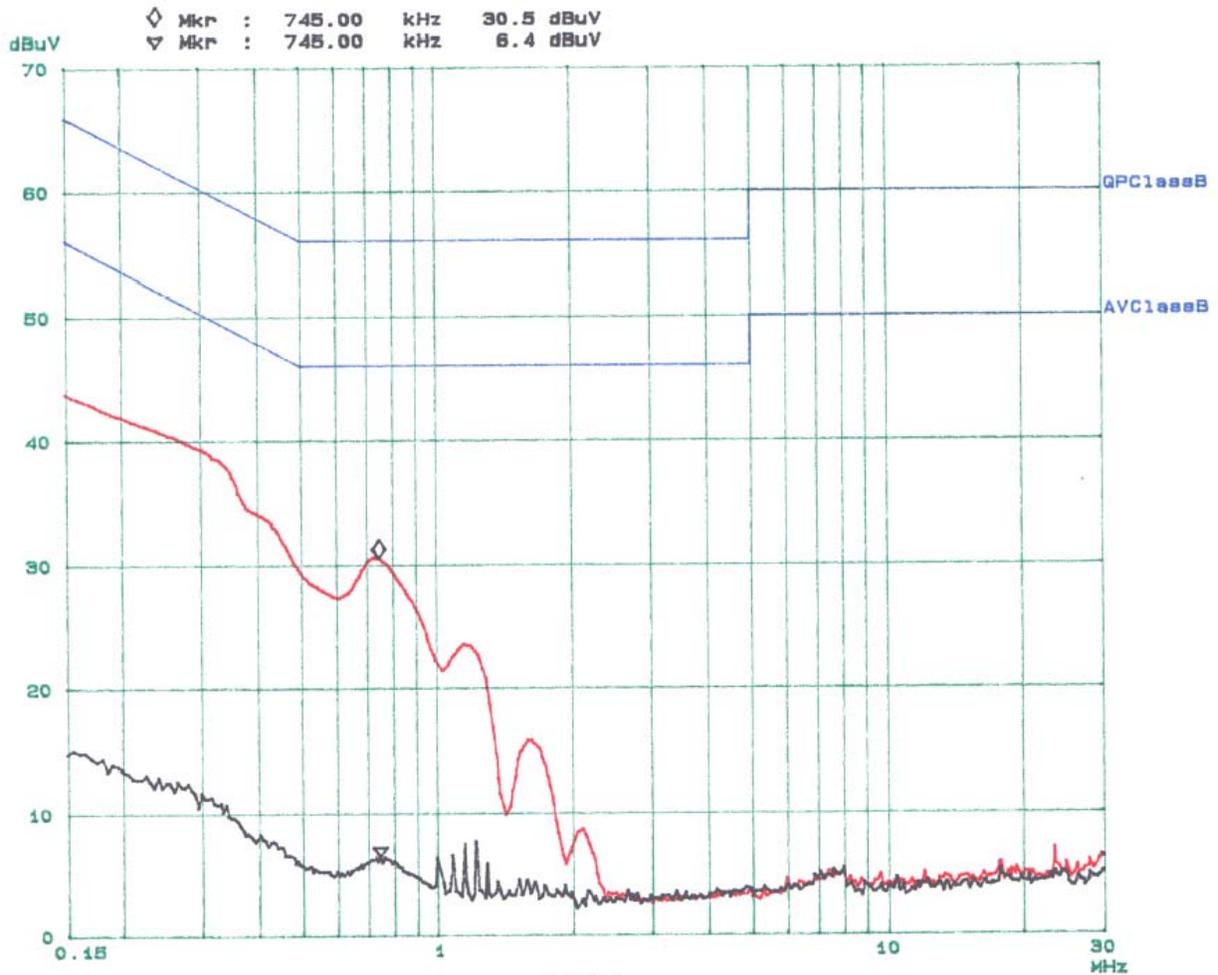

*Handwritten signature and text: 204 = 472*


Bay Area Compliance Laboratory Corp  
Class B

15. Mar 04 15:42

EUT: GLJ2306 (Transmitter)  
Manuf: Konlika  
Op Cond: Normal  
Operator: Ming  
Comment: N

Scan Settings (3 Ranges)			Receiver Settings					
Start	Stop	Stop	IF BW	Detector	M-Time	Atten	Preamp	
150k	1M	5k	9k	QP+AV	20ms	15dB LN	OFF	
1M	5M	10k	9k	QP+AV	1ms	15dB LN	OFF	
5M	30M	100k	9k	QP+AV	1ms	15dB LN	OFF	

Final Measurement: x QP / + AV  
Meas Time: 1 s  
Subranges: 25  
Acc Margin: 6dB

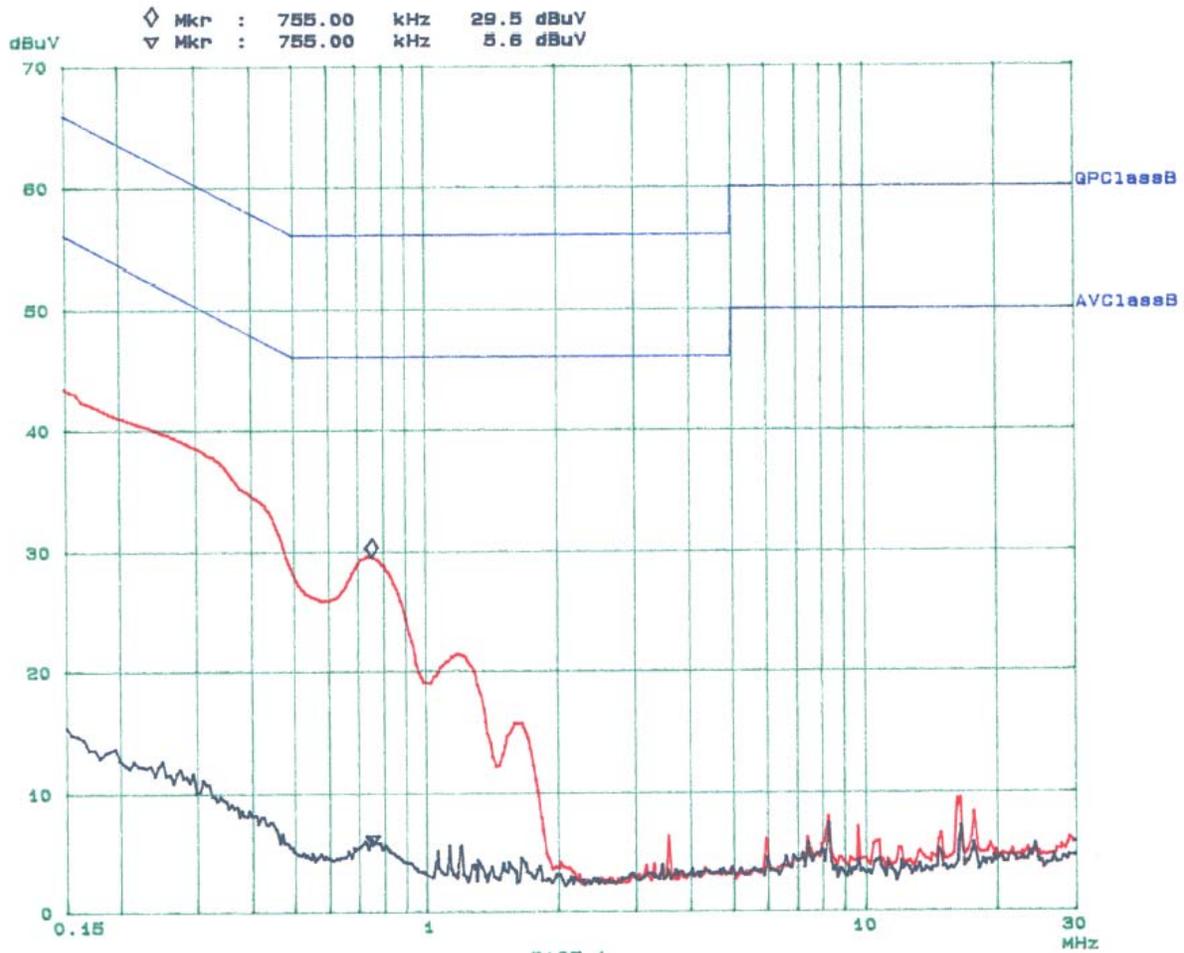

PAGE 1

*Handwritten signature and date: 2004-9-12*

---

## §15.209(a) - RADIATED EMISSION DATA

---

### Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at BAEL is  $\pm 4.0$  dB.

### EUT Setup

The radiated emission tests were performed in the open area 3-meter test site, using the setup in accordance with ANSI C63.4-2001. The specification used was the FCC 15 Subpart C limits.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundle as required.

The EUT was connected with 120Vac/60Hz power source.

### Spectrum Analyzer Setup

According to FCC Rules, 47 CFR 15.33 (a) (1), the system was tested to 25GHz.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

<i>Frequency Range</i>	<i>RBW</i>	<i>Video B/W</i>
Below 30MHz	10kHz	10kHz
30 – 1000MHz	100kHz	100kHz
Above 1000MHz	1MHz	1MHz

## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Cal. Date
HP	Spectrum Analyzer	8568B	2601A02165	2003-07-03
HP	Amplifier	8447E	2944A10187	2003-09-23
HP	Quasi-Peak Adapter	85650A	3019A05393	2003-06-13
EMCO	Biconical Antenna	3110B	9309-1165	2003-10-11
EMCO	Log Periodic Antenna	3146	2101	2003-10-11
Agilent	Spectrum Analyzer (9KHz – 50GHz)	8565EC	3946A00131	2003-05-03
HP	Amplifier (1-26.5GHz)	8449B	3147A00400	2004-03-14
A.H.System	Horn Antenna (700MHz-18GHz)	SAS-200/571	261	2003-05-31

\* **Statement of Traceability: BACL Corp.** certifies that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

## Environmental Conditions

Temperature:	24 °C
Relative Humidity:	35%
ATM Pressure:	1017 mbar

*The testing was performed by Ming Jing on 2004-04-23.*

## Test Procedure

For the radiated emissions test, the power cord of the EUT was connected to the AC floor outlet.

Maximizing procedure was performed on the six (6) highest emissions to ensure EUT is compliant with all installation combinations.

All data was recorded in both peak and average detection mode above 1GHz. For average reading, set the RBW=1MHz, VBW=10Hz.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB $\mu$ V means the emission is 7dB $\mu$ V below the maximum limit for applicable limits. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Applicable Limit}$$

## Summary of Test Results

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.207, and 15.249 after tested to 10<sup>th</sup> harmonics as required by FCC and had the worst margin of:

- 8.5 dB at 2414.00MHz in the Vertical polarization at Low Channel
- 8.2 dB at 2448.00 MHz in the Vertical polarization at Middle Channel
- 8.6 dB at 2468.00 MHz in the Vertical polarization at High Channel
- 8.2 dB at 871.96 MHz in the Vertical polarization at Unintentional Emission

## Radiated Emissions Test Result Data, 3M

INDICATED			TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 Subpart C	
Frequency MHz	Ampl. dBμV/m	Comments	Angle Degree	Height Meter	Polar H/ V	Antenna dBμV/m	Cable DB	Amp. dB	Corr. Ampl. dBμV/m	Limit dBμV/m	Margin dB
<b>1GHz – 25GHZ, Low Channel</b>											
2414.00	109.2	Fund/Peak	180	1.5	v	28.1	3.4	35.2	105.5	114	-8.5
2414.00	108.6	Fund/Peak	0	2.0	h	28.1	3.4	35.2	104.9	114	-9.1
7242.00	34.9	Ave	250	1.6	v	35.1	5.6	33.5	42.1	54	-11.9
7242.00	32.1	Ave	310	1.5	h	35.1	5.6	33.5	39.3	54	-14.7
4828.00	34.7	Ave	270	1.6	v	32.5	4.9	33.0	39.1	54	-14.9
2414.00	82.1	Fund/Ave	180	1.5	v	28.1	3.4	35.2	78.4	94	-15.6
2414.00	81.7	Fund/Ave	0	2.0	h	28.1	3.4	35.2	78.0	94	-16.0
4828.00	31.2	Ave	30	1.8	h	32.5	4.9	33.0	35.6	54	-18.4
7242.00	46.6	Peak	250	1.6	v	35.1	5.6	33.5	53.8	74	-20.2
7242.00	45.2	Peak	310	1.5	h	35.1	5.6	33.5	52.4	74	-21.6
4828.00	45.9	Peak	270	1.6	v	32.5	4.9	33.0	50.3	74	-23.7
4828.00	44.7	Peak	30	1.8	h	32.5	4.9	33.0	49.1	74	-24.9
<b>1GHz – 25GHZ, Middle Channel</b>											
2448.00	109.5	Fund/Peak	270	1.5	v	28.1	3.4	35.2	105.8	114	-8.2
2448.00	108.8	Fund/Peak	30	1.5	h	28.1	3.4	35.2	105.1	114	-8.9
7344.00	35.1	Ave	60	1.4	v	35.1	5.6	33.5	42.3	54	-11.7
7344.00	32.4	Ave	150	1.2	h	35.1	5.6	33.5	39.6	54	-14.4
4896.00	34.9	Ave	300	1.5	v	32.5	4.9	33.0	39.3	54	-14.7
2448.00	82.3	Fund/Ave	270	1.5	v	28.1	3.4	35.2	78.6	94	-15.4
2448.00	81.9	Fund/Ave	30	1.5	h	28.1	3.4	35.2	78.2	94	-15.8
4896.00	31.5	Ave	180	1.4	h	32.5	4.9	33.0	35.9	54	-18.1
7344.00	46.8	Peak	60	1.4	v	35.1	5.6	33.5	54.0	74	-20.0
7344.00	45.3	Peak	150	1.2	h	35.1	5.6	33.5	52.5	74	-21.5
4896.00	46.2	Peak	300	1.5	v	32.5	4.9	33.0	50.6	74	-23.4
4896.00	44.8	Peak	180	1.4	h	32.5	4.9	33.0	49.2	74	-24.8

**Radiated Emissions Test Result Data (Continued)**

INDICATED			TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 Subpart C	
Frequency MHz	Ampl. dB $\mu$ V/m	Comments	Angle Degree	Height Meter	Polar H/V	Antenna dB $\mu$ V/m	Cable DB	Amp. dB	Corr. Ampl. dB $\mu$ V/m	Limit dB $\mu$ V/m	Margin dB
<b>1GHz – 25GHZ, High Channel</b>											
2468.00	109.1	Fund/Peak	270	1.5	v	28.1	3.4	35.2	105.4	114	-8.6
2468.00	108.4	Fund/Peak	90	1.6	h	28.1	3.4	35.2	104.7	114	-9.3
7404.00	34.7	Ave	0	1.5	v	35.1	5.6	33.5	41.9	54	-12.1
7404.00	32.1	Ave	180	2.0	h	35.1	5.6	33.5	39.3	54	-14.7
4936.00	34.5	Ave	0	1.5	v	32.5	4.9	33.0	38.9	54	-15.1
2468.00	82.2	Fund/Ave	270	1.5	v	28.1	3.4	35.2	78.5	94	-15.5
2468.00	81.5	Fund/Ave	90	1.6	h	28.1	3.4	35.2	77.8	94	-16.2
4936.00	31.1	Ave	180	1.6	h	32.5	4.9	33.0	35.5	54	-18.5
7404.00	46.4	Peak	0	1.5	v	35.1	5.6	33.5	53.6	74	-20.4
7404.00	45.2	Peak	180	2.0	h	35.1	5.6	33.5	52.4	74	-21.6
4936.00	45.7	Peak	0	1.5	v	32.5	4.9	33.0	50.1	74	-23.9
4936.00	44.6	Peak	180	1.6	h	32.5	4.9	33.0	49.0	74	-25.0
<b>Unintentional Emission, 30MHz to 1000MHz</b>											
871.96	40.2		180	1.5	v	22.4	3.8	28.6	37.8	46	-8.2
942.70	37.9		210	1.8	v	23.4	4.2	28.3	37.2	46	-8.8
39.70	38.5		270	1.5	h	13.4	1.0	28.8	24.1	40	-15.9
51.30	41.3		0	1.2	h	10.2	1.0	28.8	23.7	40	-16.3

## §15.249(c) – BAND-EDGE TESTING

### Standard Applicable

Requirements: FCC 15.249 (c), the emission power at the START and STOP frequencies shall be at least 50 dB below the level of the fundamental or to the general radiated emission limits in FCC 15.209, whichever is the lesser attenuation.

### Test Procedure

With the EUT's antenna attached, the EUT's radiated emission power was received by the test antenna which was connected to the spectrum analyzer with the START and STOP frequencies set to the EUT's operation band.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Cal. Date
HP	Spectrum Analyzer	8565EC	3946A00131	2003-06-30

\* **Statement of Traceability: BACL Corp.** certifies that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

### Environmental Conditions

Temperature:	24 °C
Relative Humidity:	35%
ATM Pressure:	1017 mbar

*The testing was performed by Ming Jing on 2004-04-23.*

### Test Results

Refer to the attached plots.

