

Exhibit DD: Time of Occupancy-Dwell Time

FCC ID: P6I-COPYCAM

Justification

The individuals and/or the organization requesting the test provided the modes, configurations and settings available to evaluate. All of the EUT parameters listed below were investigated. This includes, but may not be limited to, antennas, tuned transmit frequency ranges, operating modes, and data rates.

Channels in Specified Band Investigated:

Mid Band

Operating Modes Investigated:

Hopping

Data Rates Investigated:

Maximum

Output Power Setting(s) Investigated:

Maximum

Power Input Settings Investigated:

120 VAC, 60 Hz.

Software\Firmware Applied During Test

Exercise software	Standard Production Software	Version	Unknown
Description			
The system was tested using standard operating production software to exercise the functions of the device during the testing.			

Equipment Modifications

No EMI suppression devices were added or modified. The EUT was tested as delivered.

EUT and Peripherals

Description	Manufacturer	Model/Part Number	Serial Number
EUT	Polyvision	CopyCam	E0200066
Control Pad	Polyvision	N/A	N/A
AC Power Adapter	Ault, Inc	P48151000A000G	N/A

Cables

Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
Ethernet	No	3.6	No	Control Pad	EUT
DC Power	No	4.4	No	EUT	AC Adapter

PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.

Measurement Equipment


Description	Manufacturer	Model	Identifier	Last Cal	Interval
Spectrum Analyzer	Tektronix	2784	AAO	03/08/2001	24 mo

Test Description

Requirement: Per 47 CFR 15.247(a)(1)(ii), the average time of occupancy on any frequency must not be greater than 0.4 seconds within a 30 second period. The measurement is made with the spectrum analyzer's span set to zero, the resolution bandwidth set to 1 MHz, and the video bandwidth set to 7 MHz. The measurement is made in two steps. First, the sweep speed is adjusted to capture the pulse width or dwell time of a single transmission. Then, the sweep speed is set to 30 seconds to count the number of transmissions during that period. The dwell time of a single transmission multiplied by the number of transmissions during a 30 second period equals the average time of occupancy during a 30 second period.

Configuration: The average dwell time per hopping channel was measured at one hopping channel in the middle of the authorized band. The measurements were made using a direct connection between the RF output of the EUT and the spectrum analyzer. The hopping function of the EUT was enabled.

Completed by:



EUT: CopyCam		Work Order: POLV0012
Serial Number: E0200066		Date: 02/22/02
Customer: PolyVision Corporation		Temperature: 23 degrees C
Attendees: Guy Williams	Tested by: Greg Kiemel	Humidity: 38% RH
Customer Ref. No.: N/A	Power: N/A	Job Site: EV06

TEST SPECIFICATIONS			
Specification: 47 CFR 15.247(a)(1)(ii)	Year: Most Current	Method: DA 00-705, ANSI C63.4	Year: 1992

SAMPLE CALCULATIONS

Total Dwell time = (Dwell Time during a single transmission) X (Number of transmissions during a 30 second period)

COMMENTS

EUT OPERATING MODES
Modulated by PRBS at maximum data rate. Hopping carrier. Data mode.

DEVIATIONS FROM TEST STANDARD
None

REQUIREMENTS
In acquisition mode, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.


RESULTS **DWELL TIME DURING A SINGLE TRANSMISSION**
Pass 388 uS

SIGNATURE


 Tested By: _____

DESCRIPTION OF TEST

Time of Occupancy (Dwell Time) - Single Transmission

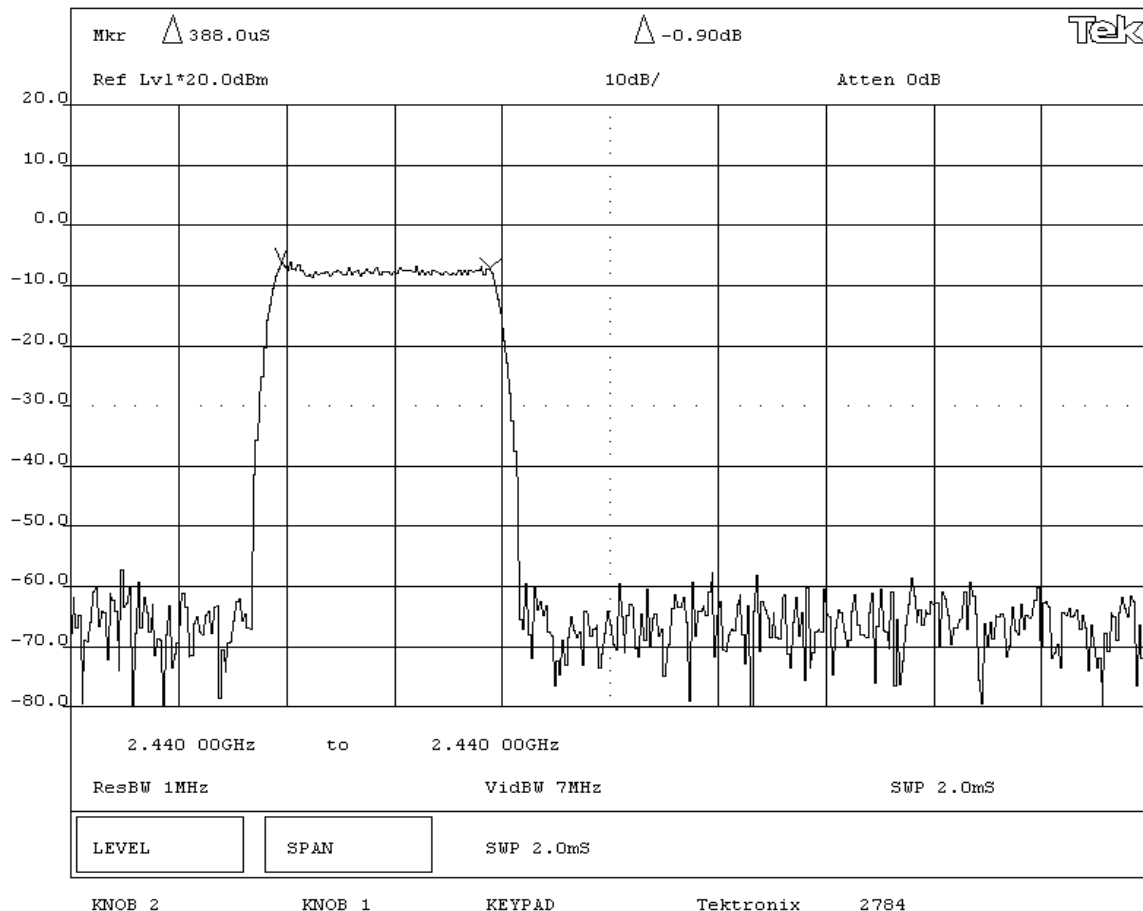

EMC EMISSIONS DATA SHEET Rev BETA 01/30/01

EUT: CopyCam	Work Order: POLV0012
Serial Number: E0200066	Date: 02/22/02
Customer: PolyVision Corporation	Temperature: 23 degrees C
Attendees: Guy Williams	Humidity: 38% RH
Customer Ref. No.: N/A	Power: N/A
Tested by: Greg Kiemel	Job Site: EV06

TEST SPECIFICATIONS
Specification: 47 CFR 15.247(a)(1)(ii) Year: Most Current Method: DA 00-705, ANSI C63.4 Year: 1992

SAMPLE CALCULATIONS

Total Dwell time = (Dwell Time during a single transmission) X (Number of transmissions during a 30 second period)

COMMENTS

EUT OPERATING MODES

Modulated by PRBS at maximum data rate. Hopping carrier. Data mode.

DEVIATIONS FROM TEST STANDARD

None

REQUIREMENTS

In acquisition mode, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

RESULTS NUMBER OF TRANSMISSIONS DURING A 30 SECOND PERIOD

Pass 300

SIGNATURE

Tested By: *Greg Kiemel*

DESCRIPTION OF TEST

Time of Occupancy (Dwell Time) - Number of transmissions during a 30 second period

