
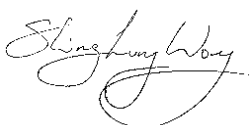



TEST REPORT FROM RFI GLOBAL SERVICES LTD

Partial Test of: Sendo International Ltd
S361

To: FCC Part 22 & 24

Test Report Serial No:
RFI/MPTE1/RP70871JD01A

| | |
|---|--|
| This Test Report Is Issued Under The Authority Of Richard Jacklin, Operations Director:  pp | |
| Tested By: Steven Wong  | Checked By: Nigel Davison  |
| Report Copy No: PDF01 | |
| Issue Date: 07 December 2004 | Test Dates: 19 November 2004 |

This report is issued in Adobe Acrobat portable document format (PDF). It is only a valid copy of the report if it is being viewed in PDF format with the following security options not allowed: Changing the document, Selecting text and graphics, Adding or changing notes and form fields. Furthermore, the date of creation must match the issue date stated above.

This report may be copied in full. The results in this report apply only to the sample(s) tested.

RFI Global Services Ltd

Pavilion A, Ashwood Park, Ashwood Way, Basingstoke, Hampshire RG23 8BG

Telephone: +44 (0)1256 312000 Facsimile: +44 (0)1256 312001

Email: info@rfi-global.com Website: www.rfi-global.com

Registered in England and Wales. Company number: 2117901

Test of: **Sendo International Ltd**
 S361
To: **FCC Part 22 & 24**

This page has been left intentionally blank.

Test of: Sendo International Ltd
 S361
To: FCC Part 22 & 24

Table of Contents

1. Client Information4

2. Equipment Under Test (EUT) 5

3. Test Results..... 10

4. Deviations from the Test Specification 12

5. Operation of the EUT During Testing..... 13

6. Summary of Test Results – Part 22 14

7. Measurements, Examinations and Derived Results 15

8. Measurement Uncertainty40

9. Measurement Methods41

Appendix 1. Test Equipment Used49

Appendix 2. Test Configuration Drawings.....51

Test of: Sendo International Ltd
S361
To: FCC Part 22 & 24

1. Client Information

| | |
|----------------------|--|
| Company Name: | Sendo International Ltd |
| Address: | Sendo Base Station Hatchford Brook Hatchford Way Sheldon Birmingham B26 3QA United Kingdom |
| Contact Name: | Mr M Bailey |

Test of: Sendo International Ltd
S361
To: FCC Part 22 & 24

2. Equipment Under Test (EUT)

The following information (with the exception of the Date of Receipt) has been supplied by the client:

2.1. Identification of Equipment Under Test (EUT)

| | | |
|-----------------------------|------------------|----------------|
| Brand Name: | Sendo | |
| Model Name or Number: | S361 | |
| Unique Type Identification: | SND361 | |
| Serial Number: | 0101C3865100002 | |
| FCC ID Number: | P6PSND601 | |
| Country of Manufacture: | Battery Cell | United Kingdom |
| | Mobile Station | Netherlands |
| Date of Receipt: | 12 November 2004 | |

2.2. Accessories

The following accessories were supplied with the EUT:

| | |
|-------------------------|---------------------------|
| Description: | Personal Hands free (PHF) |
| Brand Name: | None Stated |
| Model Name or Number: | None Stated |
| Serial Number: | None Stated |
| Country of Manufacture: | China |

| | |
|-------------------------|--------------|
| Description: | Leather Case |
| Brand Name: | None Stated |
| Model Name or Number: | None Stated |
| Serial Number: | None Stated |
| Country of Manufacture: | China |

Test of: Sendo International Ltd
S361
To: FCC Part 22 & 24

Accessories (Continued)

| | |
|-------------------------|-------------|
| Description: | Hip Pouch |
| Brand Name: | Sendo |
| Model Name or Number: | None Stated |
| Serial Number: | None Stated |
| Country of Manufacture: | China |

| | |
|-------------------------|-------------|
| Description: | AC Charger |
| Brand Name: | Sendo |
| Model Name or Number: | DVR-530 |
| Serial Number: | None Stated |
| Country of Manufacture: | China |

2.3. Description of EUT

The equipment under test is a dual band 850 MHz and 1900 MHz mobile station, with PHF and case accessories.

2.4. Modifications Incorporated in EUT

During the course of testing the EUT was not modified.

Test of: Sendo International Ltd
S361
To: FCC Part 22 & 24

2.5. Additional Information Related to Testing

| | | | |
|---|---------------------------------------|----------------|-------------------------|
| Power Supply Requirement: | 4.2 V DC Re-chargeable Li-ion Battery | | |
| Declared Battery End Point Voltage | 3.5 V DC | | |
| Power Supply Requirement: (AC Battery Charger) | Nominal 110 V 60 Hz AC Mains Supply | | |
| Intended Operating Environment: | Within GSM Network Coverage | | |
| Equipment Category: | Portable | | |
| Type of Unit: | Transceiver | | |
| Interface Ports: | AC Charger / Handsfree Interface Port | | |
| Highest Fundamental Frequency: | GSM 850 | 848.8 MHz | |
| | PCS 1900 | 1909.8 MHz | |
| Highest Unintentionally Generated Frequency: | GSM 850 | 893.8 MHz | |
| | PCS 1900 | 1989.8 MHz | |
| GSM 850 Transmit Frequency Range: | 824 MHz to 849 MHz | | |
| Transmit Channels Tested: | Channel ID | Channel Number | Channel Frequency (MHz) |
| | Bottom | 128 | 824.2 |
| | Middle | 190 | 836.6 |
| | Top | 251 | 848.8 |
| GSM 850 Transmit Frequency Range: | 869 MHz to 894 MHz | | |
| Receive Channels Tested: | Channel ID | Channel Number | Channel Frequency (MHz) |
| | Bottom | 128 | 869.2 |
| | Middle | 190 | 881.6 |
| | Top | 251 | 893.8 |
| Maximum Power Output (ERP) | 26.3 dBm | | |

Test of: Sendo International Ltd
S361
To: FCC Part 22 & 24

Additional Information Related to Testing (Continued)

| | | | |
|---|----------------------|-----------------------|--------------------------------|
| GSM 1900 Transmit Frequency Range: | 1850 MHz to 1910 MHz | | |
| Transmit Channels Tested: | Channel ID | Channel Number | Channel Frequency (MHz) |
| | Bottom | 512 | 1850.2 |
| | Middle | 660 | 1879.8 |
| | Top | 810 | 1909.8 |
| GSM 1900 Receive Frequency Range: | 1930 MHz to 1990 MHz | | |
| Receive Channels Tested: | Channel ID | Channel Number | Channel Frequency (MHz) |
| | Bottom | 512 | 1930.2 |
| | Middle | 660 | 1960.0 |
| | Top | 810 | 1989.8 |
| Maximum Power Output (EIRP) | 28.0 dBm | | |

Test of: Sendo International Ltd
S361
To: FCC Part 22 & 24

2.6. Support Equipment

No support equipment was supplied by the applicant and used to exercise the EUT during testing.

Test of: Sendo International Ltd
S361
To: FCC Part 22 & 24

3. Test Results

| | |
|-------------------------|---|
| Reference: | FCC Part 22 Subpart H: 2003 (Cellular Radiotelephone Service) |
| Title: | Code of Federal Regulations, Part 22 (47CFR22) Personal Communication Services. |
| Purpose of Test: | To determine whether the equipment complied with the requirements of the specification for the purposes of certification. |

| | |
|-------------------------|---|
| Reference: | FCC Part 24 Subpart E: 2003 (Broadband PCS) |
| Title: | Code of Federal Regulations, Part 24 (47CFR24) Personal Communication Services. |
| Purpose of Test: | To determine whether the equipment complied with the requirements of the specification for the purposes of certification. |

3.1. Methods and Procedures

The methods and procedures used were as detailed in:

ANSI/TIA-603-B-2002

Land Mobile Communications Equipment, Measurements and performance Standards

ANSI C63.2 (1987)

Title: American National Standard for Instrumentation - Electromagnetic noise and field strength.

ANSI C63.4 (2003)

Title: American National Standard Methods of Measurement of Electromagnetic Emissions from Low Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

ANSI C63.5 (1988)

Title: American National Standard for the Calibration of antennas used for Radiated Emission measurements in Electromagnetic Interference (EMI) control.

ANSI C63.7 (1988)

Title: American National Standard Guide for Construction of Open Area Test Sites for performing Radiated Emission Measurements.

CISPR 16-1: (1999)

Title: Specification For Radio Disturbance and Immunity Measuring Apparatus and Methods. Part 1: Radio Disturbance and Immunity Measuring Apparatus.

DA00-705 (2000)

Title: Filing and Frequency Measurement Guidelines for Frequency Hopping Spread Spectrum Systems.

Test of: Sendo International Ltd
S361
To: FCC Part 22 & 24

3.2. Definition of Measurement Equipment

The measurement equipment used complied with the requirements of the standards referenced in the Methods & Procedures section above. Appendix 1 contains a list of the test equipment used.

Test of: Sendo International Ltd
S361
To: FCC Part 22 & 24

4. Deviations from the Test Specification

None.

Test of: Sendo International Ltd
S361
To: FCC Part 22 & 24

5. Operation of the EUT During Testing

5.1. Operating Conditions

During testing, the EUT was powered by a nominal 4.2 V DC Re-chargeable Li-ion Battery and connected to a 110 V 60 Hz AC Mains charger.

5.2. Operating Modes

The EUT was tested in the following operating modes, unless otherwise stated. Preliminary radiated scans were performed on the EUT with the accessories stated in section 2.2 of this report connected and then disconnected. The combination that exhibited the worst case mode of operation was then used to perform final measurements.

Transmitter Modes:

All Transmitter radiated spurious pre-scan tests were performed at full power on the top channel of the assigned frequency block. Final measurements were then performed on the top, middle and bottom channels, if an emission was identified.

Receiver/Idle Modes:

Testing was performed with the call terminated from the GSM Test Simulator and the phone left in its idle modes.

5.3. Configuration and Peripherals

The EUT was tested in the following configuration:

Configured with AC charger.

All tests were performed with the EUT connected via an air link to a GSM test set.

Test of: Sendo International Ltd
S361
To: FCC Part 22 & 24

6. Summary of Test Results – Part 22

| Range of Measurements | Specification Reference | Port Type | Compliance Status |
|--|--|----------------------|--------------------------|
| Receiver/Idle Radiated Emissions | C.F.R. 47 FCC Part 15: 2003 Section 15.109 | Enclosure | Complied |
| Transmitter Effective Radiated Power (ERP) | C.F.R. 47 FCC Part 22: 2003 Section 22.913(a) | Antenna | Complied |
| Transmitter Occupied Bandwidth | C.F.R. 47 FCC Part 22: 2003 Section 2.1049 | Antenna Terminals | Complied |
| Transmitter Out of Band Radiated Emissions | C.F.R. 47 FCC Part 22: 2003 Section 2.1053/22.917 | Antenna | Complied |
| Transmitter Band Edge Radiated Emissions | C.F.R. 47 FCC Part 22: 2003 Section 2.1053/22.917 | Antenna | Complied |

Summary of Test Results – Part 24

| Range of Measurements | Specification Reference | Port Type | Compliance Status |
|---|--|----------------------|--------------------------|
| Idle Mode Radiated Spurious Emissions | C.F.R. 47 FCC Part 15: 2003 Section 15.109 | Enclosure | Complied |
| Transmitter Effective Isotropic Radiated Power (EIRP) | C.F.R. 47 FCC Part 24: 2003 Section 24.232 | Antenna | Complied |
| Transmitter Occupied Bandwidth | C.F.R. 47 FCC Part 24: 2003 Section 24.238 | Antenna Terminals | Complied |
| Transmitter Out of Band Radiated Emissions | C.F.R. 47 FCC Part 24: 2003 Section 2.1053/24.238 | Antenna | Complied |
| Transmitter Band Edge Radiated Emissions | C.F.R. 47 FCC Part 2: 2003 Section 2.1053/24.238 | Antenna | Complied |

6.1. Location of Tests

All the measurements described in this report were performed at the premises of RFI Global Services Ltd, Ewhurst Park, Ramsdell, Basingstoke, Hampshire, RG26 5RQ, England.

Test of: Sendo International Ltd
S361
To: FCC Part 22 & 24

7. Measurements, Examinations and Derived Results

7.1. General Comments

7.1.1. This section contains test results only.

7.1.2. Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to Section 8 for details of measurement uncertainties.

Test of: Sendo International Ltd
S361
To: FCC Part 22 & 24

Test Results – Part 22

7.2. Receiver/Idle Mode Radiated Spurious Emissions: Section 15.109

7.2.1. Electric Field Strength Measurements (Frequency Range: 30 to 1000 MHz)


7.2.1.1. The EUT was configured as for radiated emissions testing as described in Section 9 of this report.

7.2.1.2. Tests were performed to identify the maximum receiver or standby radiated emissions levels.

Results:

| Frequency (MHz) | Antenna Polarity | Quasi-Peak Level (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Result |
|-----------------|------------------|---------------------------------|----------------------|-------------|----------|
| 151.077 | Vert. | 22.0 | 43.5 | 21.5 | Complied |
| 160.905 | Vert. | 18.5 | 43.5 | 25.0 | Complied |

Idle Radiated Spurious Emissions: Section 15.109 (Continued)

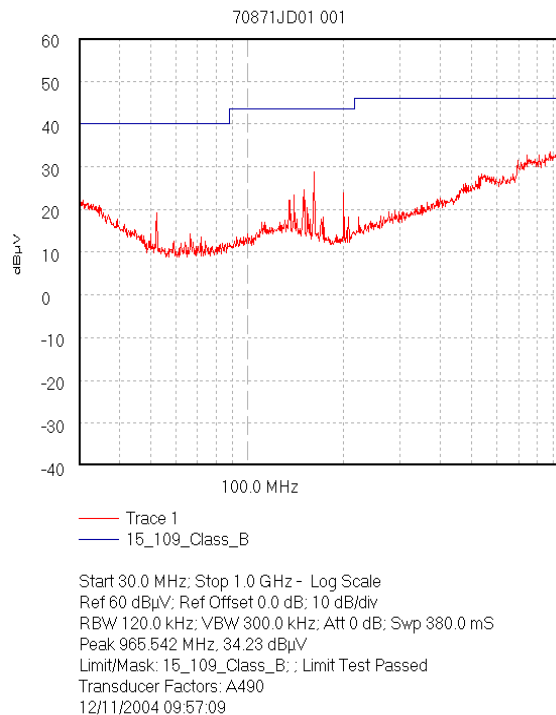

Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying tables.

Test of: Sendo International Ltd
S361
To: FCC Part 22 & 24

Receiver/Idle Mode Radiated Emissions: Section 15.109 (Continued)**7.2.2. Electric Field Strength Measurements (Frequency Range: 1 to 5 GHz)****Results:**




| Frequency (GHz) | Antenna Polarity | Detector Level (dB μ V) | Antenna Factor (dB) | Cable Loss (dB) | Actual Peak Level (dB μ V/m) | Average Limit (dB μ V/m) | Margin (dB) | Result |
|--------------------|---------------------|-----------------------------------|---------------------------|-----------------------|---|------------------------------------|----------------|----------|
| 1.818889 | Vert. | 20.4 | 21.6 | 0.7 | 42.7 | 54.0 | 11.3 | Complied |

Note(s):

- 1. No spurious emissions were detected above the noise floor of the measuring receiver; therefore the highest peak noise floor reading of the measuring receiver was recorded as shown in the table above.*
- 2. The peak level was compared to the average limit as opposed to being compared to the peak limit because this is the more onerous limit.*

Test of: Sendo International Ltd
S361
To: FCC Part 22 & 24

Receiver/Idle Mode Radiated Emissions: Section 15.109 (Continued)

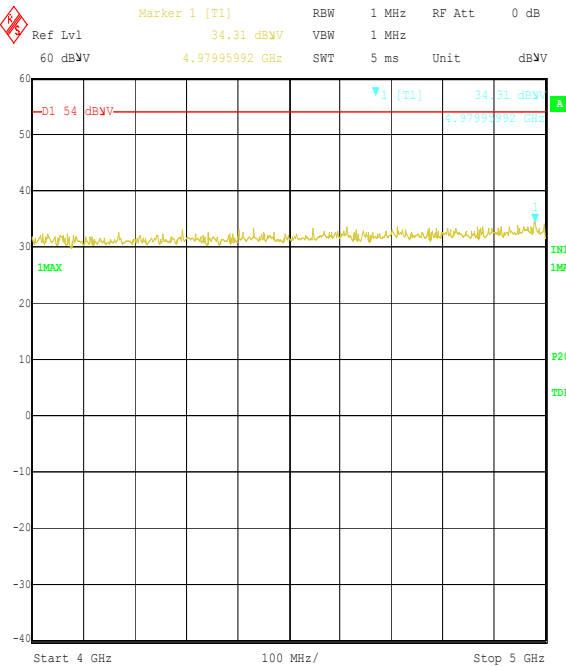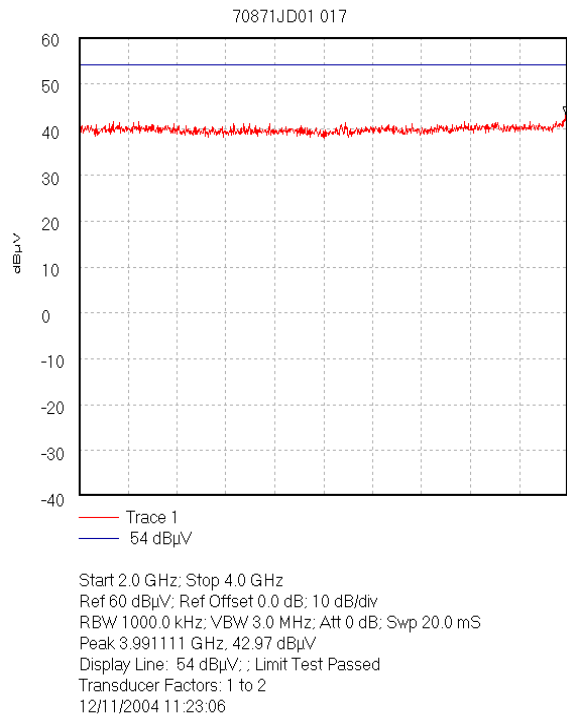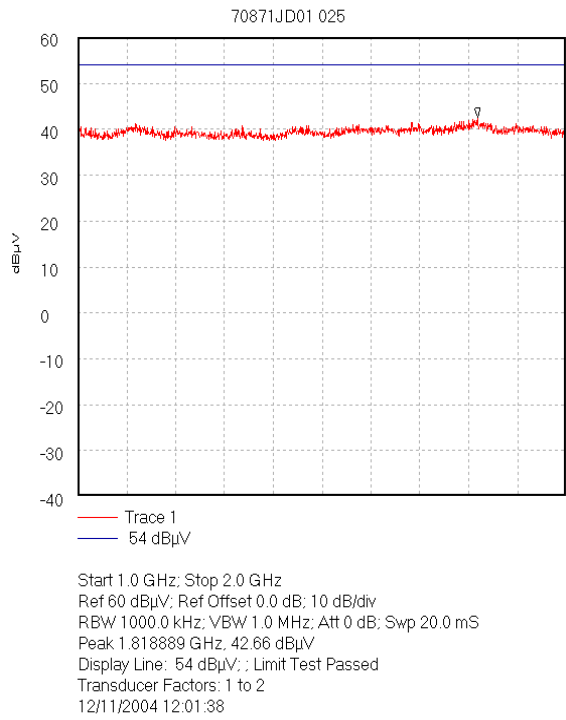

Title: SENDO Eut:S361 FCC P22/24, Radiated Spurious Emissions
Comment A: 70871JD01 Receive Mode 850 GSM
Date: 17.NOV.2004 14:49:12

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

Test of: Sendo International Ltd
S361
To: FCC Part 22 & 24

7.3. Transmitter Effective Radiated Power (ERP): Section 22.913(a)

7.3.1. The EUT was configured as for Effective Radiated Power as described in Section 9 of this report.

7.3.2. Tests were performed to identify the maximum Effective Radiated Power (ERP).

Results:

| Channel | Measured Frequency (MHz) | Antenna Polarity | Maximum Transmitter ERP (dBm) | ERP Limit (dBm) | Margin (dB) | Result |
|---------|--------------------------|------------------|-------------------------------|-----------------|-------------|----------|
| Bottom | 824.2 | Vert. | 26.3 | 38.4 | 8.1 | Complied |
| Middle | 836.6 | Vert. | 24.9 | 38.4 | 13.5 | Complied |
| Top | 848.8 | Vert. | 24.1 | 38.4 | 14.3 | Complied |

Test of: Sendo International Ltd
S361
To: FCC Part 22 & 24

7.4. Transmitter Occupied Bandwidth: Section 2.1049

7.4.1. The EUT was configured as for Occupied Bandwidth measurements as described in Section 9 of this report.


7.4.2. Tests were performed to identify the maximum bandwidth occupied by the fundamental frequency of the EUT.

Results:


| Channel | Frequency (MHz) | Resolution Bandwidth (kHz) | Video Bandwidth (kHz) | Occupied Bandwidth (kHz) |
|---------|--------------------|----------------------------------|--------------------------|--------------------------------|
| Bottom | 824.2 | 3.0 | 10.0 | 251.002 |
| Middle | 836.6 | 3.0 | 10.0 | 251.002 |
| Top | 848.8 | 3.0 | 10.0 | 251.002 |

Test of: Sendo International Ltd
To: S361
FCC Part 22 & 24


Transmitter Occupied Bandwidth: Section 2.1049 (Continued)

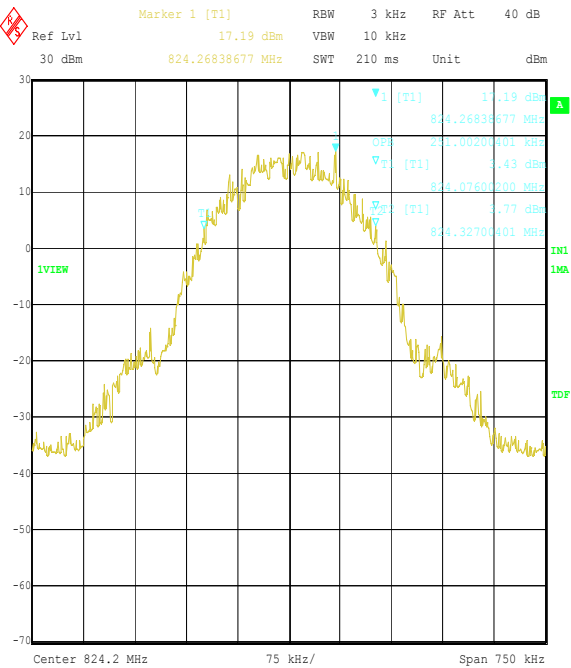

Title: SENDO Eut:S361 FCC P22/24. Occupied Bandwidth
Comment A: 70871JD01 Bottom Channel
Date: 17.NOV.2004 14:04:01

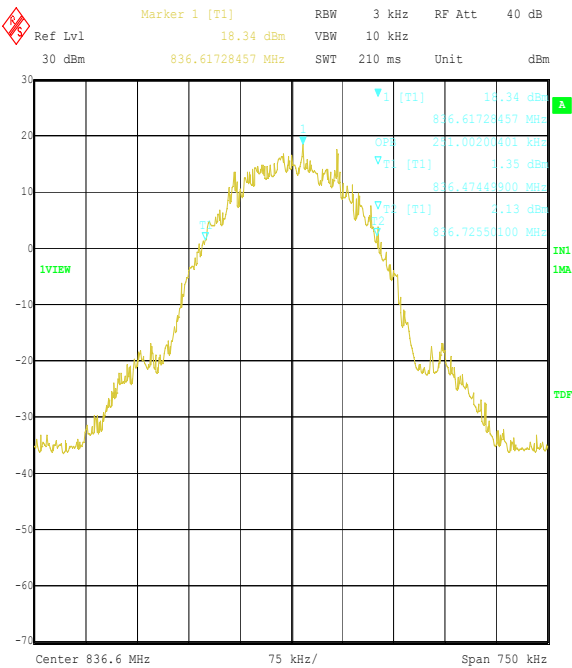

Title: SENDO Eut:S361 FCC P22/24. Occupied Bandwidth
Comment A: 70871JD01 Middle Channel
Date: 17.NOV.2004 14:05:22

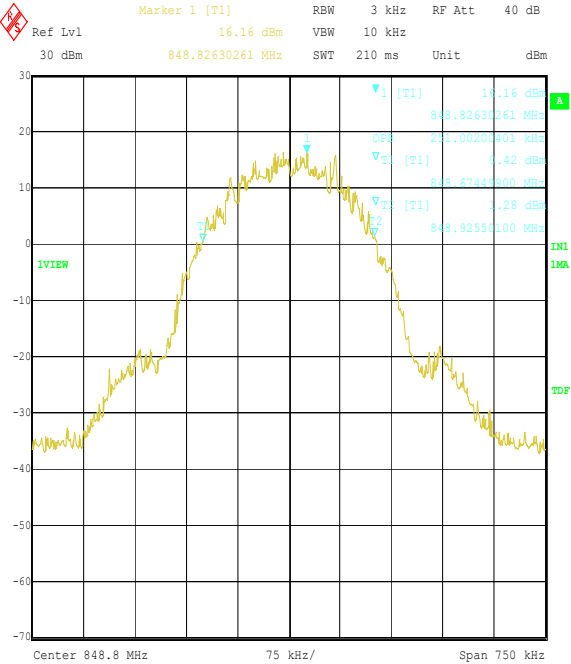

Title: SENDO Eut:S361 FCC P22/24. Occupied Bandwidth
Comment A: 70871JD01 Top Channel
Date: 17.NOV.2004 14:06:41

Note: The occupied bandwidth is measured using the internal OBW function of the measurement analyser. The analyser automatically configures the measurement bandwidths to make an accurate measurement. The results can be observed in the right hand corner of the graphs.

Test of: Sendo International Ltd
S361
To: FCC Part 22 & 24

7.5. Transmitter Out of Band Radiated Emissions: Section 2.1053 & 22.917

7.5.1. The EUT was configured as for transmitter radiated emissions testing as described in Section 9 of this report.

7.5.2. Tests were performed to identify the maximum transmitter radiated emission levels.

Results:**Bottom Channel**

| Frequency (MHz) | Peak Emission Level (dBm) | Limit (dBm) | Margin (dB) | Result |
|-----------------|---------------------------|-------------|-------------|----------|
| 1648.400 | -40.3 | -13.0 | 27.3 | Complied |

Middle Channel


| Frequency (MHz) | Peak Emission Level (dBm) | Limit (dBm) | Margin (dB) | Result |
|-----------------|---------------------------|-------------|-------------|----------|
| 1672.886 | -41.8 | -13.0 | 28.8 | Complied |

Top Channel


| Frequency (MHz) | Peak Emission Level (dBm) | Limit (dBm) | Margin (dB) | Result |
|-----------------|---------------------------|-------------|-------------|----------|
| 1697.363 | -38.4 | -13.0 | 25.4 | Complied |

Test of: Sendo International Ltd
S361
To: FCC Part 22 & 24


Transmitter Out of Band Radiated Emissions: Section 2.1053 & 22.917 (Continued)

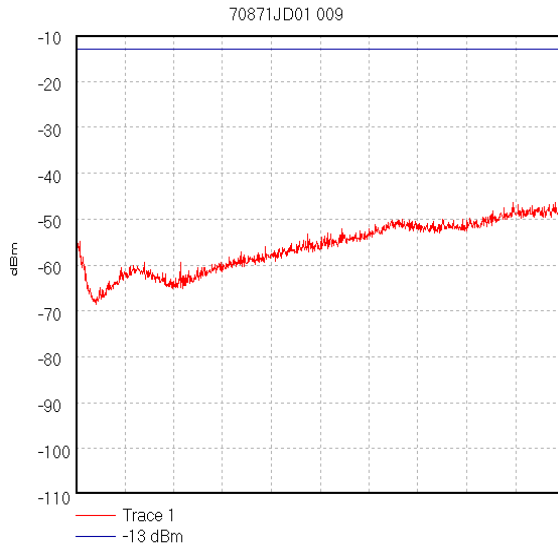


Start 30.0 MHz; Stop 824.0 MHz
Ref -10 dBm; Ref Offset 9.6 dB; 10 dB/div
RBW 100.0 kHz; VBW 300.0 kHz; Att 10 dB; Swp 520.0 mS
Peak 822.236 MHz, -45.95 dBm
Display Line: -13 dBm; Limit Test Passed
Transducer Factors: A490
12/11/2004 10:54:51

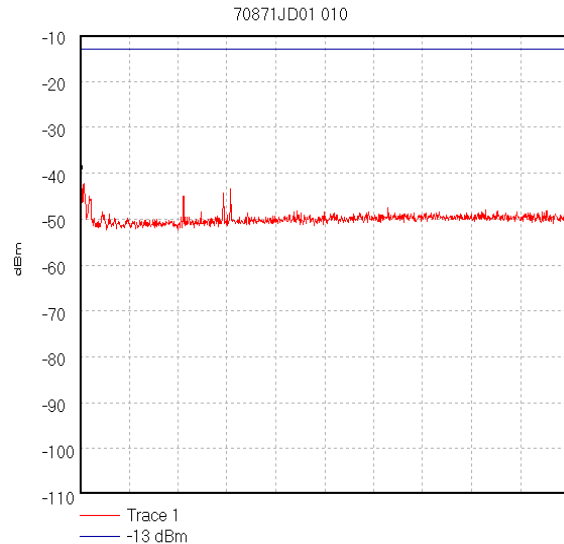

Start 850.0 MHz; Stop 1.0 GHz
Ref -10 dBm; Ref Offset 9.6 dB; 10 dB/div
RBW 100.0 kHz; VBW 300.0 kHz; Att 0 dB; Swp 60.0 mS
Peak 850.0 MHz, -40.42 dBm
Display Line: -13 dBm
Transducer Factors: A490
12/11/2004 11:02:15

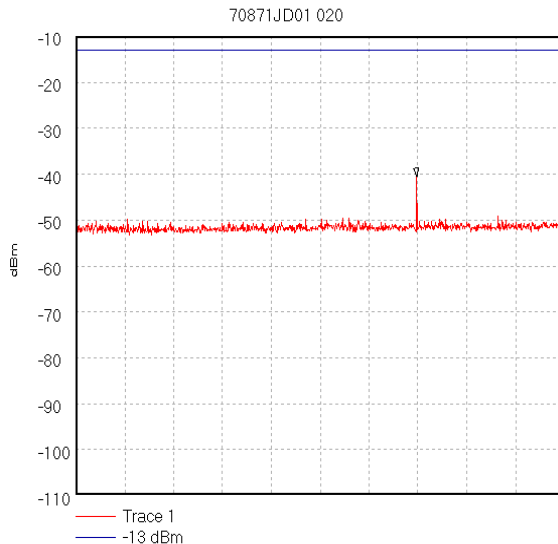


Start 1.0 GHz; Stop 2.0 GHz
Ref -10 dBm; Ref Offset 9.6 dB; 10 dB/div
RBW 100.0 kHz; VBW 300.0 kHz; Att 0 dB; Swp 300.0 mS
Peak 1.697778 GHz, -40.57 dBm
Display Line: -13 dBm
Transducer Factors: 1 to 2
12/11/2004 11:45:02

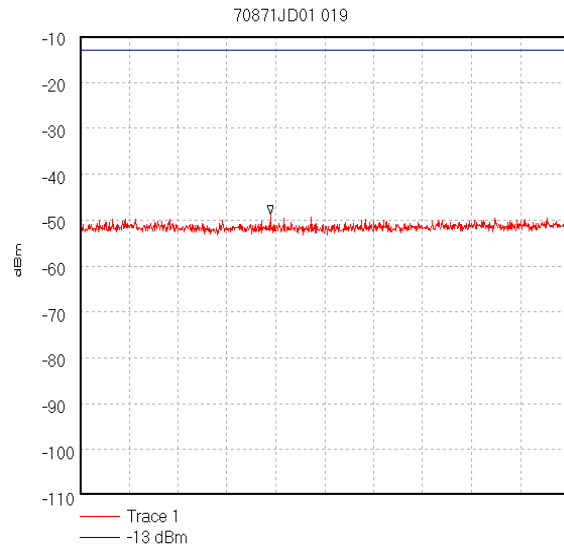


Start 2.0 GHz; Stop 4.0 GHz
Ref -10 dBm; Ref Offset 9.6 dB; 10 dB/div
RBW 100.0 kHz; VBW 300.0 kHz; Att 0 dB; Swp 600.0 mS
Peak 2.78 GHz, -48.75 dBm
Display Line: -13 dBm
Transducer Factors: 1 to 2
12/11/2004 11:28:14

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.


Test of: Sendo International Ltd
S361
To: FCC Part 22 & 24

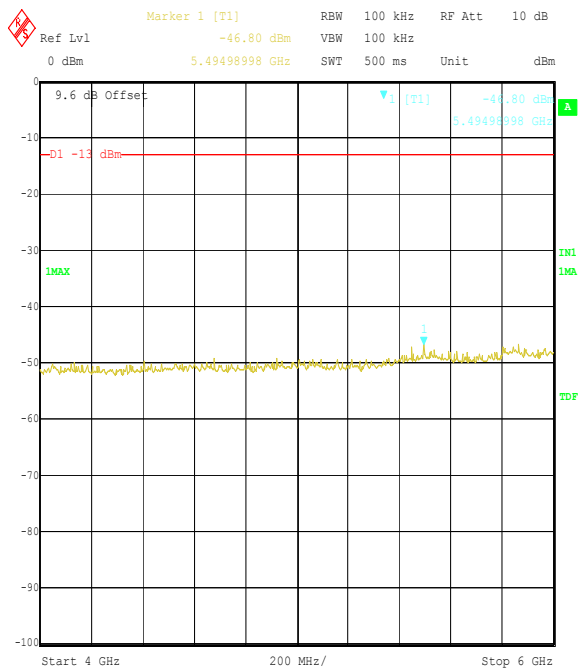Transmitter Out of Band Radiated Emissions: Section 2.1053 & 22.917 (Continued)

Title: SENDO Eut:S361 FCC P22/24. Radiated Spurious Emissions
Comment A: 70871JD01 Top Channel 850 GSM
Date: 17.NOV.2004 14:44:38

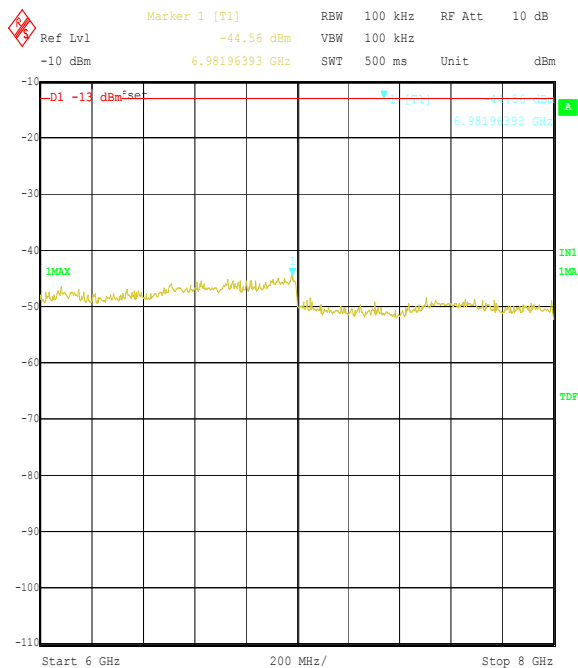

Title: SENDO Eut:S361 FCC P22/24. Radiated Spurious Emissions
Comment A: 70871JD01 Top Channel 850 GSM
Date: 17.NOV.2004 15:13:56

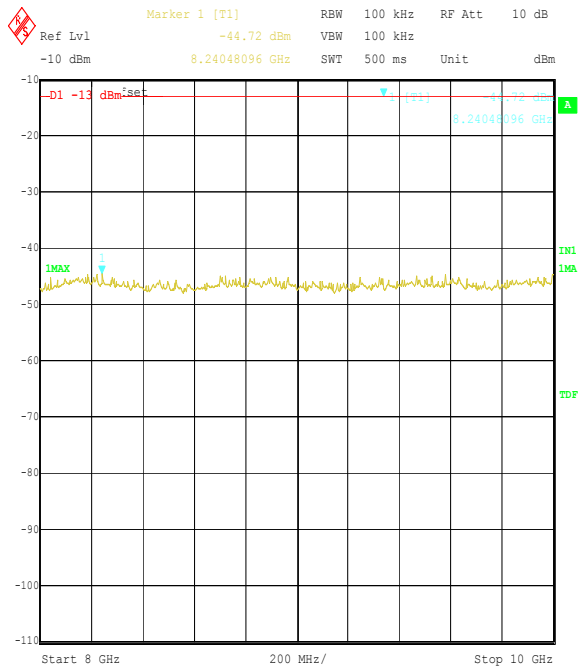

Title: SENDO Eut:S361 FCC P22/24. Radiated Spurious Emissions
Comment A: 70871JD01 Top Channel 850 GSM
Date: 17.NOV.2004 15:23:47

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

Test of: Sendo International Ltd
S361
To: FCC Part 22 & 24

7.6. Transmitter Radiated Emissions at Band Edges: Section 2.1053/22.917

7.6.1. The EUT was configured as for transmitter radiated emissions testing described in Section 9 of this report.

7.6.2. Tests were performed to identify the maximum emissions level at the band edges of the frequency block that the EUT will operate over.


Results:

Bottom Band Edge


| Frequency (MHz) | Peak Emission Level (dBm) | Limit (dBm) | Margin (dB) | Result |
|-----------------|---------------------------|-------------|-------------|----------|
| 824 | -14.4 | -13.0 | 1.4 | Complied |

Top Band Edge

| Frequency (MHz) | Peak Emission Level (dBm) | Limit (dBm) | Margin (dB) | Result |
|-----------------|---------------------------|-------------|-------------|----------|
| 849 | -21.6 | -13.0 | 8.6 | Complied |

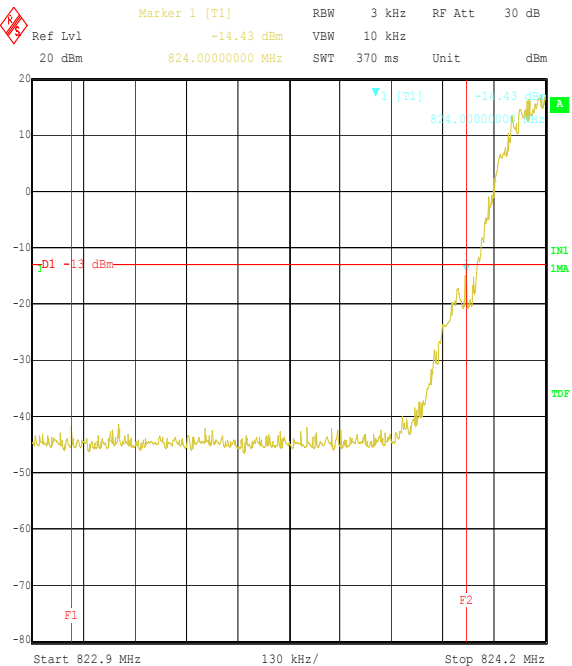

Title: SENDO Eut:S361 FCC P22/24, Radiated Band Edge
Comment A: 70871JD01 Bottom Channel
Date: 17.NOV.2004 14:00:29

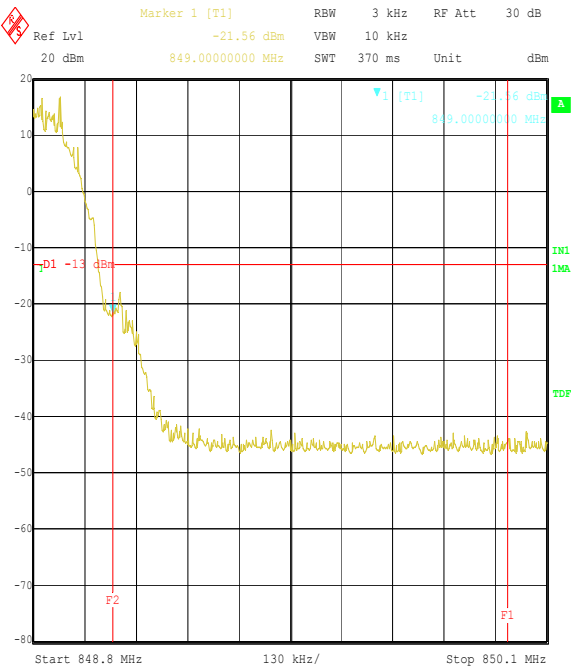

Title: SENDO Eut:S361 FCC P22/24, Radiated Band Edge
Comment A: 70871JD01 Top Channel
Date: 17.NOV.2004 13:59:00

Test of: Sendo International Ltd
S361
To: FCC Part 22 & 24

Test Results – Part 24

7.7. Receiver Radiated Spurious Emissions: Section 15.109

7.7.1. Electric Field Strength Measurements (Frequency Range: 30 to 1000 MHz)


7.7.1.1. The EUT was configured as for receiver radiated emissions testing as described in Section 9 of this report.

7.7.1.2. Tests were performed to identify the maximum receiver or standby radiated emissions levels.

Results:

| Frequency (MHz) | Antenna Polarity | Quasi-Peak Level (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) | Result |
|-----------------|------------------|---------------------------------|----------------------|-------------|----------|
| 151.077 | Vert. | 22.0 | 43.5 | 21.5 | Complied |
| 171.872 | Vert. | 18.9 | 43.5 | 24.6 | Complied |

Receiver Radiated Spurious Emissions: Section 15.109 (Continued)

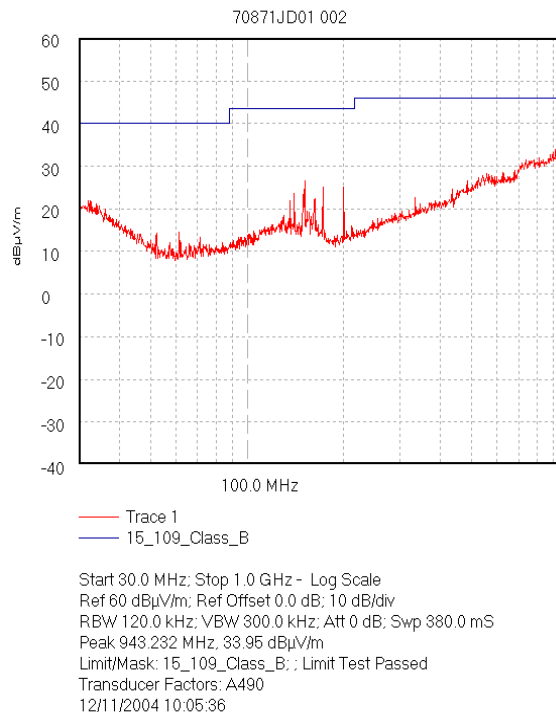

Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying tables.

Test of: Sendo International Ltd
S361
To: FCC Part 22 & 24

Receiver Radiated Emissions: Section 15.109 (Continued)**7.7.2. Electric Field Strength Measurements (Frequency Range: 1 to 10 GHz)****Results:**




| Frequency (GHz) | Antenna Polarity | Peak Detector Level (dB μ V) | Antenna Factor (dB) | Cable Loss (dB) | Actual Peak Level (dB μ V/m) | Average Limit (dB μ V/m) | Margin (dB) | Result |
|-----------------|------------------|----------------------------------|---------------------|-----------------|----------------------------------|------------------------------|-------------|----------|
| 7.559118 | Vert. | 18.0 | 26.9 | 1.7 | 46.5 | 54.0 | 7.5 | Complied |

Note(s):


- 1. No spurious emissions were detected above the noise floor of the measuring receiver; therefore the highest peak noise floor reading of the measuring receiver was recorded as shown in the table above.*
- 2. The peak level was compared to the average limit as opposed to being compared to the peak limit because this is the more onerous limit.*

Test of: Sendo International Ltd
To: S361
FCC Part 22 & 24

Receiver Radiated Spurious Emissions: Section 15.109 (Continued)

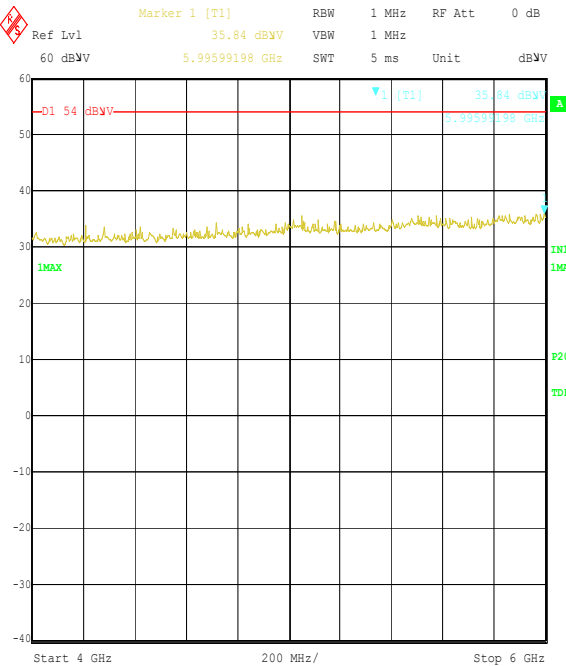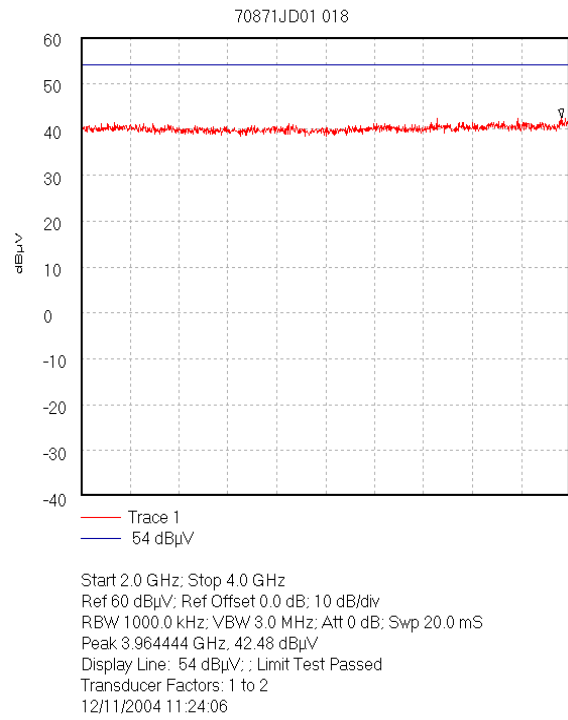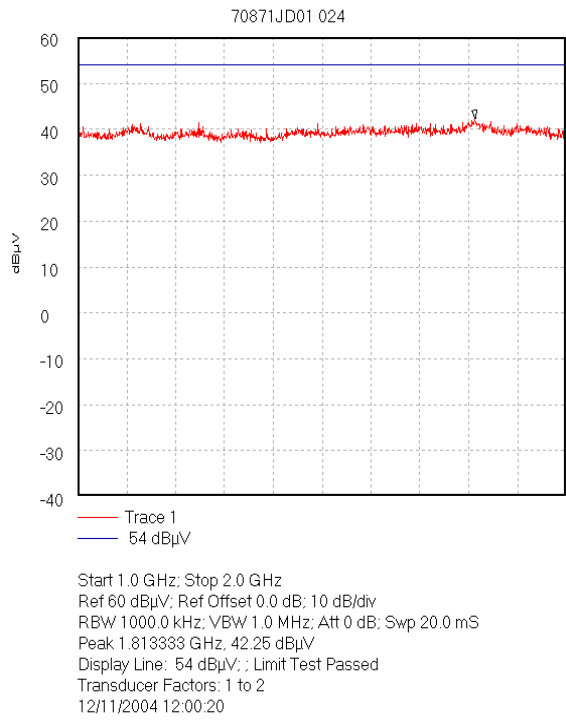

Title: SENDO Eut:S361 FCC P22/24, Radiated Spurious Emissions
Comment A: 70871JD01 Receive Mode 1900 PCS
Date: 17.NOV.2004 14:50:56

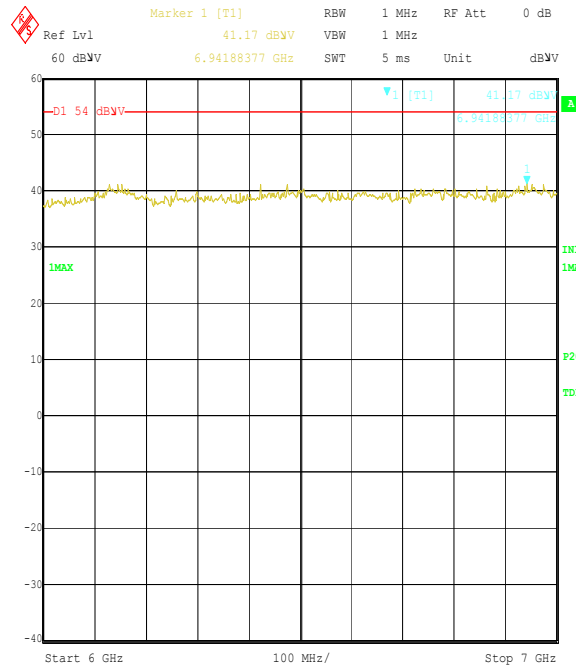


Title: SENDO Eut:S361 FCC P22/24, Radiated Spurious Emissions
Comment A: 70871JD01 Idle Mode 1900 PCS
Date: 17.NOV.2004 15:16:20


Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

Test of: Sendo International Ltd
S361
To: FCC Part 22 & 24

Receiver Radiated Spurious Emissions: Section 15.109 (Continued)

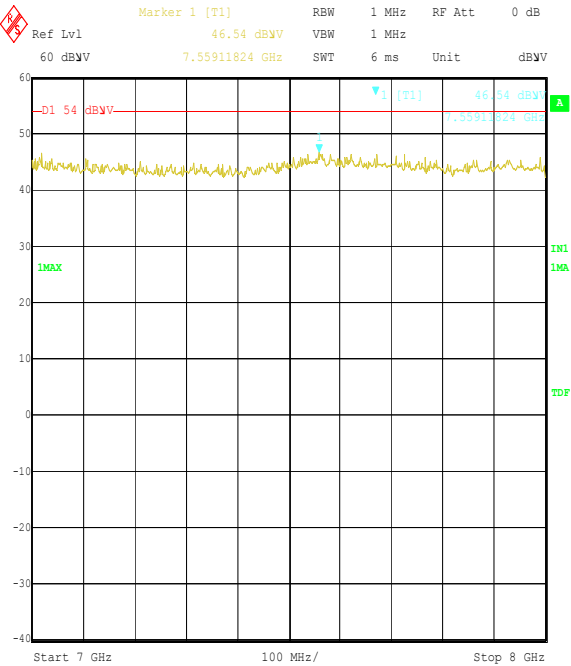

Title: SENDO Eut:S361 FCC P22/24. Radiated Spurious Emissions
Comment A: 70871JD01 Idle Mode 1900 PCS
Date: 17.NOV.2004 15:18:15

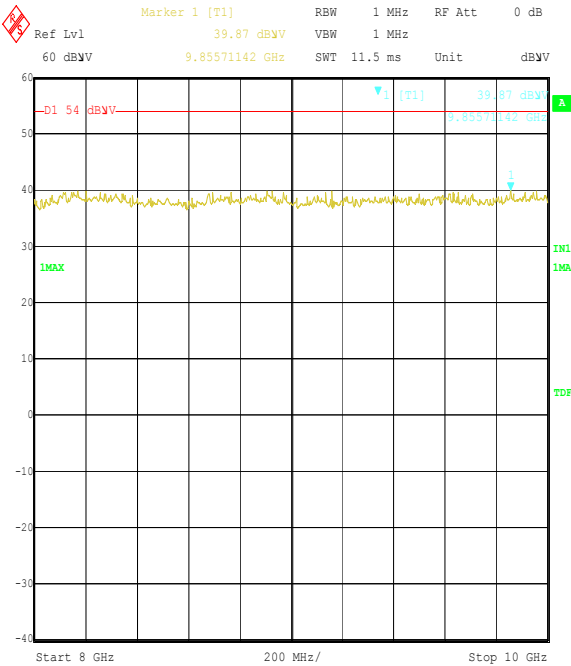

Title: SENDO Eut:S361 FCC P22/24. Radiated Spurious Emissions
Comment A: 70871JD01 Idle Mode 1900 PCS
Date: 17.NOV.2004 15:20:52

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

Test of: Sendo International Ltd
S361
To: FCC Part 22 & 24

7.8. Transmitter Effective Isotropic Radiated Power (EIRP): Section 24.232

7.8.1. The EUT was configured as for Effective Isotropic Radiated Power as described in Section 9 of this report.

7.8.2. Tests were performed to identify the maximum Effective Isotropic Radiated Power (EIRP).

Results:

| Channel | Measured Frequency (MHz) | Antenna Polarity | Maximum Transmitter EIRP (dBm) | Limit EIRP (dBm) | Margin (dB) | Result |
|---------|--------------------------|------------------|--------------------------------|------------------|-------------|----------|
| Bottom | 1850.2 | Vert. | 26.9 | 33.0 | 6.1 | Complied |
| Middle | 1879.8 | Vert. | 27.2 | 33.0 | 5.8 | Complied |
| Top | 1909.8 | Vert. | 28.0 | 33.0 | 5.0 | Complied |

Test of: Sendo International Ltd
S361
To: FCC Part 22 & 24

7.9. Transmitter Occupied Bandwidth: Section 24.238

7.9.1. The EUT was configured as for Occupied Bandwidth measurements as described in Section 9 of this report.


7.9.2. Tests were performed to identify the maximum bandwidth occupied by the fundamental frequency of the EUT.

Results:


| Channel | Frequency (MHz) | Resolution Bandwidth (kHz) | Video Bandwidth (kHz) | Occupied Bandwidth (kHz) |
|---------|--------------------|----------------------------------|--------------------------|--------------------------------|
| Bottom | 1850.2 | 3.0 | 10.0 | 251.002 |
| Middle | 1879.8 | 3.0 | 10.0 | 247.996 |
| Top | 1909.8 | 3.0 | 10.0 | 251.002 |

Test of: Sendo International Ltd
To: S361
FCC Part 22 & 24


Transmitter Occupied Bandwidth: Section 24.238 (Continued)

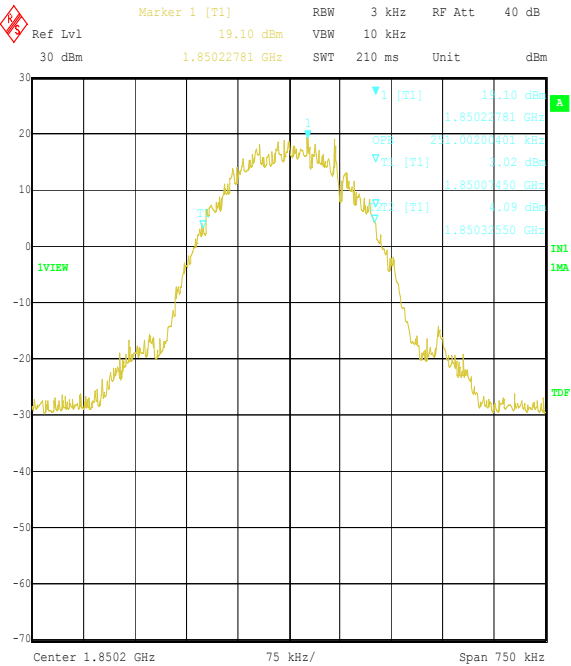

Title: SENDO Eut:S361 FCC P22/24. Occupied Bandwidth
Comment A: 70871JD01 Bottom Channel
Date: 17.NOV.2004 11:33:39

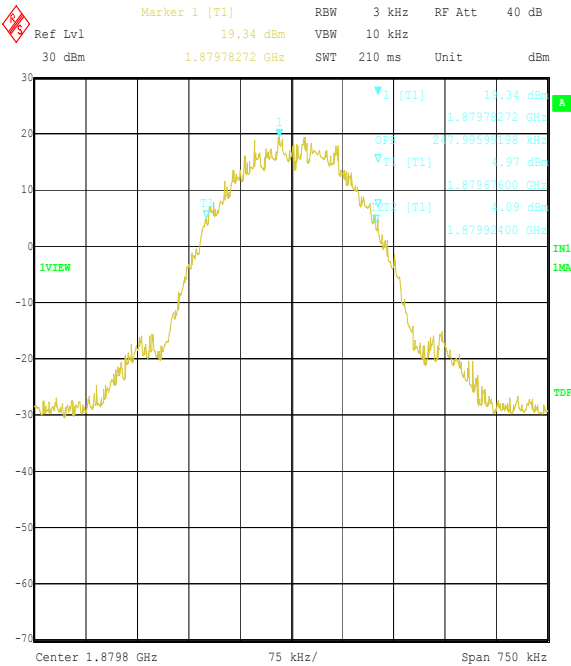

Title: SENDO Eut:S361 FCC P22/24. Occupied Bandwidth
Comment A: 70871JD01 Middle Channel
Date: 17.NOV.2004 11:35:58

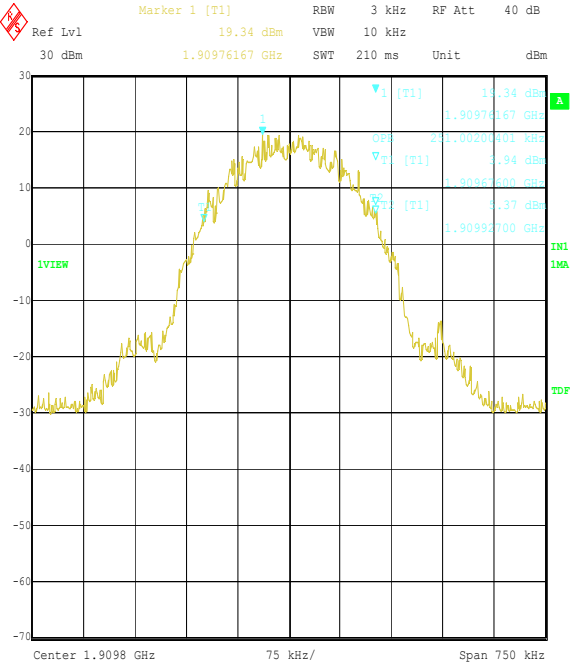

Title: SENDO Eut:S361 FCC P22/24. Occupied Bandwidth
Comment A: 70871JD01 Top Channel
Date: 17.NOV.2004 11:37:34

Note: The occupied bandwidth is measured using the internal OBW function of the measurement analyser. The analyser automatically configures the measurement bandwidths to make an accurate measurement. The results can be observed in the right hand corner of the graphs.

Test of: Sendo International Ltd
S361
To: FCC Part 22 & 24

7.10. Transmitter Out of Band Radiated Emissions: Section 2.1053 & 24.238

7.10.1. The EUT was configured as for transmitter radiated emissions testing as described in Section 9 of this report.

7.10.2. Tests were performed to identify the maximum transmitter radiated emission levels.

Results:**Bottom Channel**

| Frequency (MHz) | Peak Emission Level (dBm) | Limit (dBm) | Margin (dB) | Result |
|-----------------|---------------------------|-------------|-------------|----------|
| 3700.520 | -35.2 | -13.0 | 22.2 | Complied |

Middle Channel


| Frequency (MHz) | Peak Emission Level (dBm) | Limit (dBm) | Margin (dB) | Result |
|-----------------|---------------------------|-------------|-------------|----------|
| 3759.773 | -33.4 | -13.0 | 20.4 | Complied |

Top Channel

| Frequency (MHz) | Peak Emission Level (dBm) | Limit (dBm) | Margin (dB) | Result |
|-----------------|---------------------------|-------------|-------------|----------|
| 3819.590 | -30.5 | -13.0 | 17.5 | Complied |


Test of: Sendo International Ltd
S361
To: FCC Part 22 & 24

Transmitter Out of Band Radiated Emissions: Section 2.1053 & 24.238 (Continued)

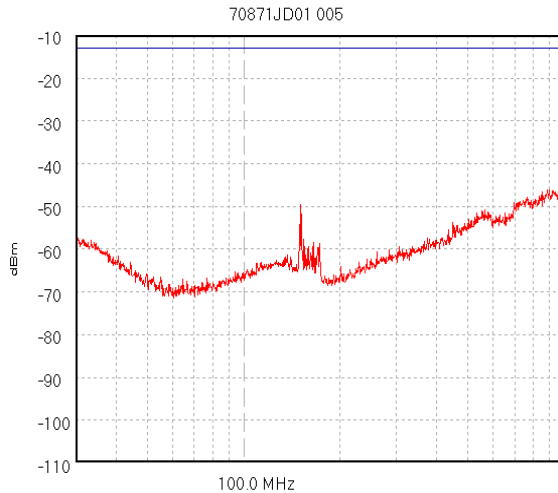


Trace 1
-13 dBm

Start 30.0 MHz; Stop 1.0 GHz - Log Scale
Ref -10 dBm; Ref Offset 11.8 dB; 10 dB/div
RBW 1000.0 kHz; VBW 3.0 MHz; Att 0 dB; Swp 20.0 mS
Peak 996.111 MHz, -45.83 dBm
Display Line: -13 dBm; Limit Test Passed
Transducer Factors: A490
12/11/2004 10:33:50

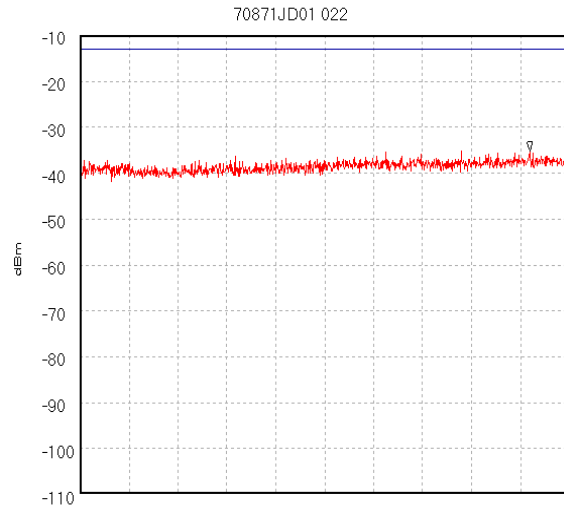


Trace 1
-13 dBm

Start 1.0 GHz; Stop 1.85 GHz
Ref -10 dBm; Ref Offset 11.8 dB; 10 dB/div
RBW 1.0 MHz; VBW 1.0 MHz; Att 10 dB; Swp 20.0 mS
Peak 1.782 GHz, -35.16 dBm
Display Line: -13 dBm;
Transducer Factors: 1 to 2
12/11/2004 11:51:16

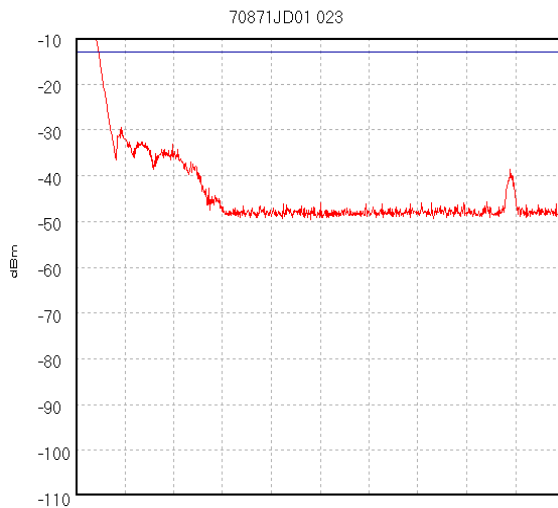

Trace 1
-13 dBm

Start 1.91 GHz; Stop 2.0 GHz
Ref -10 dBm; Ref Offset 11.8 dB; 10 dB/div
RBW 1.0 MHz; VBW 1.0 MHz; Att 0 dB; Swp 20.0 mS
Peak 1.9116 GHz, -6.02 dBm
Display Line: -13 dBm;
Transducer Factors: 1 to 2
12/11/2004 11:53:26

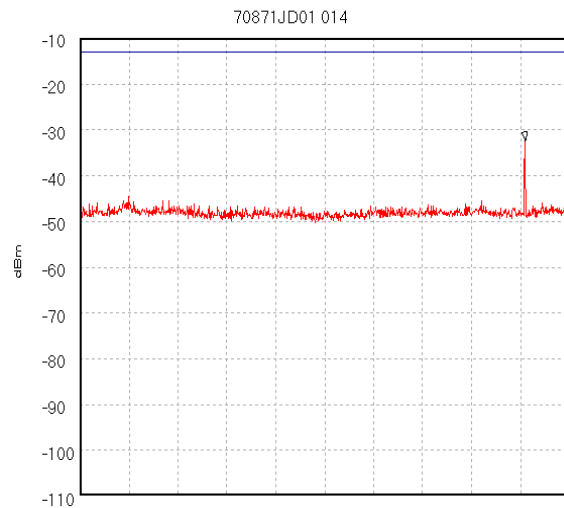


Trace 1
-13 dBm

Start 2.0 GHz; Stop 4.0 GHz
Ref -10 dBm; Ref Offset 11.8 dB; 10 dB/div
RBW 1.0 MHz; VBW 1.0 MHz; Att 0 dB; Swp 20.0 mS
Peak 3.82 GHz, -32.42 dBm
Display Line: -13 dBm;
Transducer Factors: 1 to 2
12/11/2004 11:18:54


Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

Test of: Sendo International Ltd
S361
To: FCC Part 22 & 24


Transmitter Out of Band Radiated Emissions: Section 2.1053 & 24.238 (Continued)

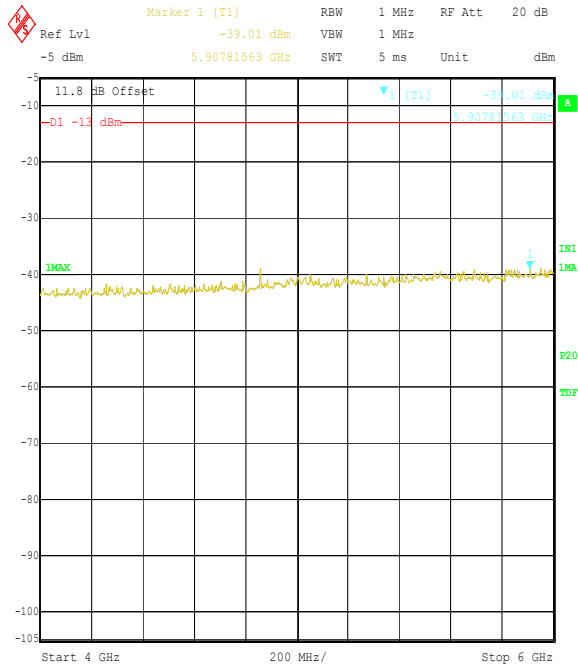

Title: SENDO Eut:S361 FCC P22/24. Radiated Spurious Emissions
Comment A: 70871JD01 Top Channel 1900 PCS
Date: 17.NOV.2004 15:10:29

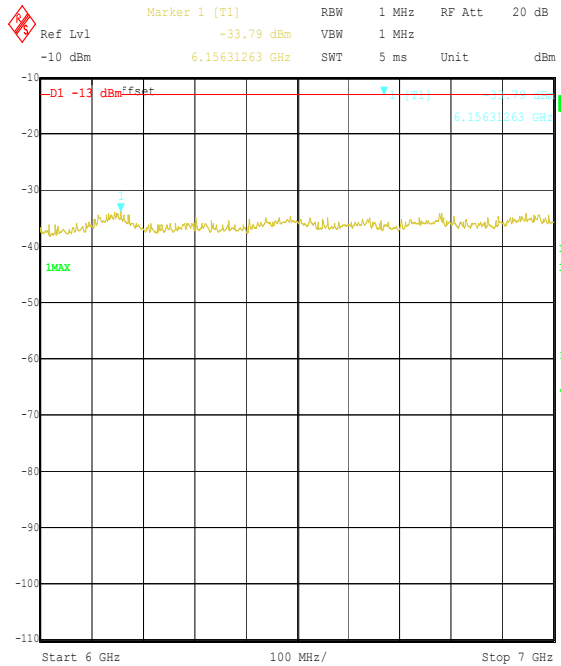

Title: SENDO Eut:S361 FCC P22/24. Radiated Spurious Emissions
Comment A: 70871JD01 Top Channel 1900 PCS
Date: 17.NOV.2004 15:07:17

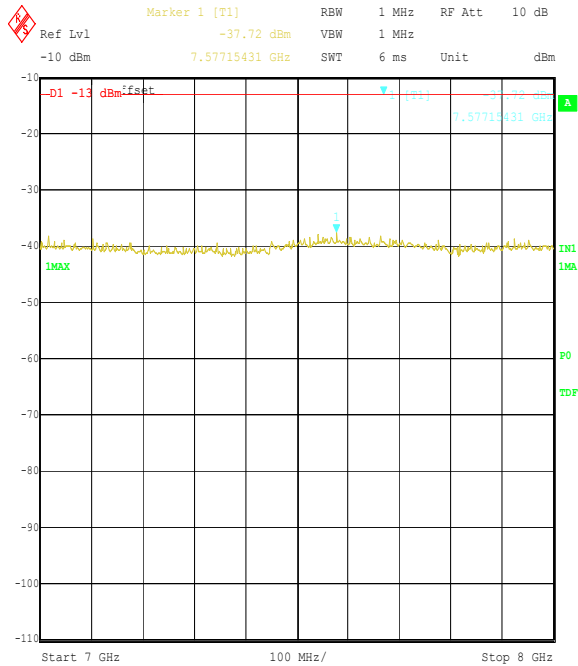

Title: SENDO Eut:S361 FCC P22/24. Radiated Spurious Emissions
Comment A: 70871JD01 Top Channel 1900 PCS
Date: 17.NOV.2004 15:08:47




Title: SENDO Eut:S361 FCC P22/24. Radiated Spurious Emissions
Comment A: 70871JD01 Top Channel 1900 PCS
Date: 17.NOV.2004 15:26:07


Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

Test of: Sendo International Ltd
S361
To: FCC Part 22 & 24

Transmitter Out of Band Radiated Emissions: Section 2.1053 & 24.238 (Continued)

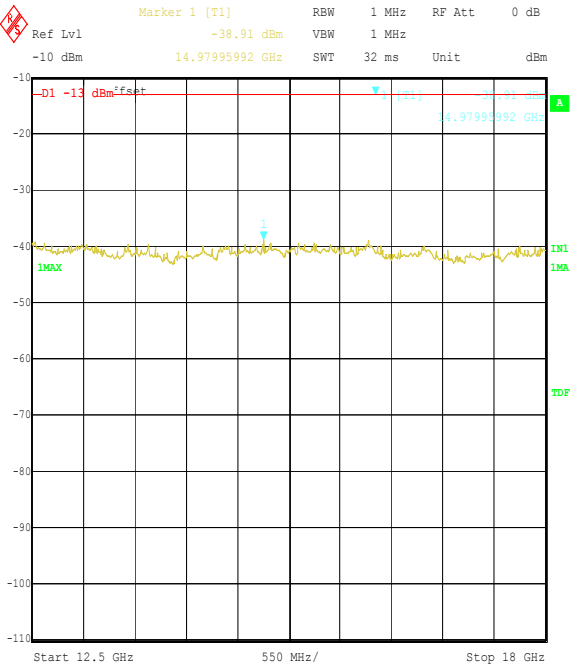

Title: SENDO Eut:S361 FCC P22/24. Radiated Spurious Emissions
Comment A: 70871JD01 Top Channel 1900 PCS
Date: 17.NOV.2004 15:29:08

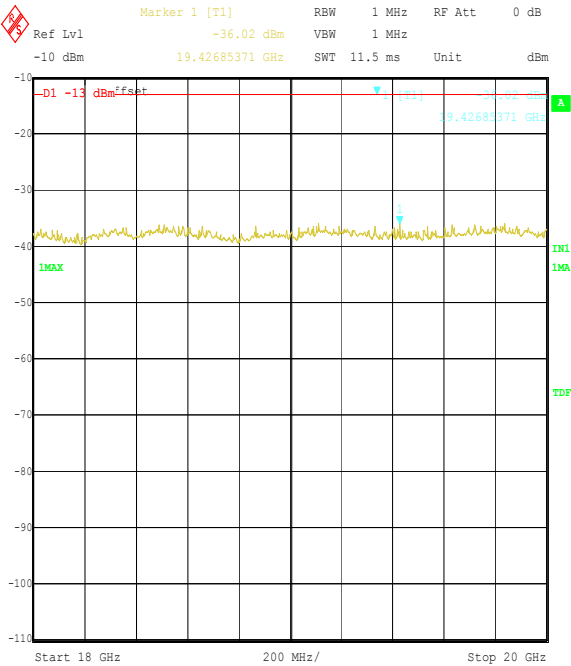

Title: SENDO Eut:S361 FCC P22/24. Radiated Spurious Emissions
Comment A: 70871JD01 Top Channel 1900 PCS
Date: 17.NOV.2004 15:32:38

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

Test of: Sendo International Ltd
S361
To: FCC Part 22 & 24

Transmitter Out of Band Radiated Emissions: Section 2.1051 & 24.238 (Continued)

Integrated Power Over 1 MHz Strip Band: 1911 to 1912 MHz

1st 1 MHz block immediately outside adjacent frequency block

| 100 kHz Strip Number | Peak Power (nW/100 kHz) | 100 kHz Strip Number | Peak Power (nW/100 kHz) |
|--------------------------|----------------------------|----------------------|----------------------------|
| 1 | 246.037 | 6 | 121.619 |
| 2 | 202.302 | 7 | 191.867 |
| 3 | 181.552 | 8 | 143.549 |
| 4 | 223.872 | 9 | 125.026 |
| 5 | 178.649 | 10 | 125.603 |
| Total Peak Power: | | 1740.076 nW/MHz | |

Integrated Power Over 1 MHz Strip Band: 1912 to 1913 MHz

2nd 1 MHz block immediately outside adjacent frequency block


| 100 kHz Strip Number | Peak Power (nW/100 kHz) | 100 kHz Strip Number | Peak Power (nW/100 kHz) |
|--------------------------|----------------------------|----------------------|----------------------------|
| 1 | 148.549 | 6 | 128.825 |
| 2 | 176.198 | 7 | 132.739 |
| 3 | 138.357 | 8 | 122.180 |
| 4 | 154.882 | 9 | 127.350 |
| 5 | 102.802 | 10 | 129.420 |
| Total Peak Power: | | 1356.302 nW/MHz | |

Results:


| Band (MHz) | Peak Power (dBm/MHz) | Limit (dBm/MHz) | Margin (dB) | Status |
|---------------|-------------------------|-----------------|----------------|----------|
| 1911 to 1912 | -27.6 | -13.0 | 14.6 | Complied |
| 1912 to 1913 | -28.7 | -13.0 | 15.7 | Complied |

Test of: Sendo International Ltd
S361
To: FCC Part 22 & 24

Transmitter Out of Band Radiated Emissions: Section 2.1051 & 24.238 (Continued)

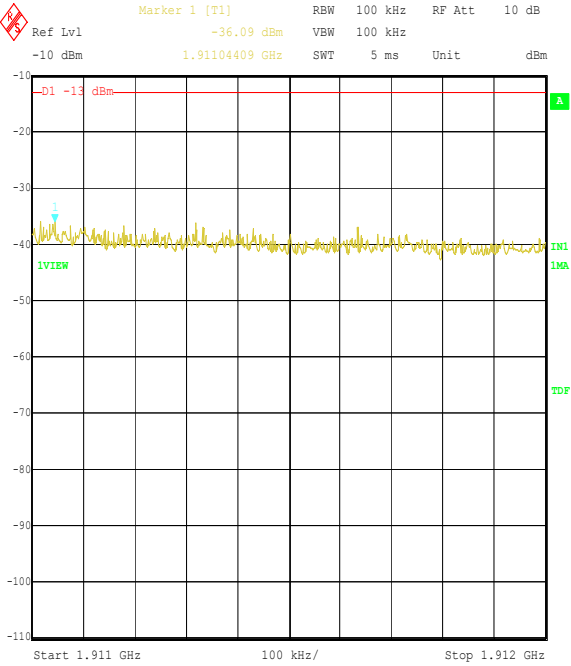

Title: SENDO Eut:S361 FCC P22/24, Radiated Band Strip
Comment A: 70871JD01 Top Channel
Date: 17.NOV.2004 11:15:48

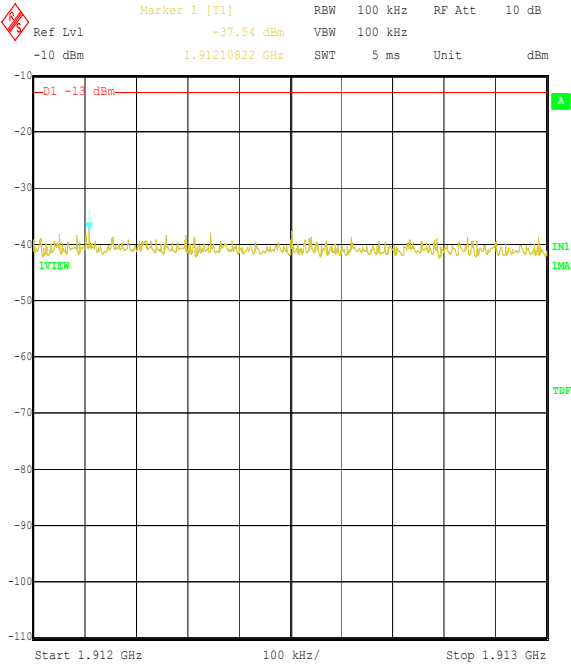

Title: SENDO Eut:S361 FCC P22/24, Radiated Band Strip
Comment A: 70871JD01 Top Channel
Date: 17.NOV.2004 11:11:59

Test of: Sendo International Ltd
S361
To: FCC Part 22 & 24

7.11. Transmitter Radiated Emissions at Band Edges: Section 2.1053 & 24.238

7.11.1. The EUT was configured as for transmitter radiated emissions testing described in Section 9 of this report.

7.11.2. Tests were performed to identify the maximum emissions level at the band edges of the frequency block that the EUT will operate over.


Results:

Bottom Band Edge


| Frequency (MHz) | Spurious Emission (dBm) | Limit (dBm) | Margin (dB) | Result |
|-----------------|-------------------------|-------------|-------------|----------|
| 1850 | -15.1 | -13.0 | 2.1 | Complied |

Top Band Edge

| Frequency (MHz) | Peak Emission Level (dBm) | Limit (dBm) | Margin (dB) | Result |
|-----------------|---------------------------|-------------|-------------|----------|
| 1910 | -16.7 | -13.0 | 3.7 | Complied |

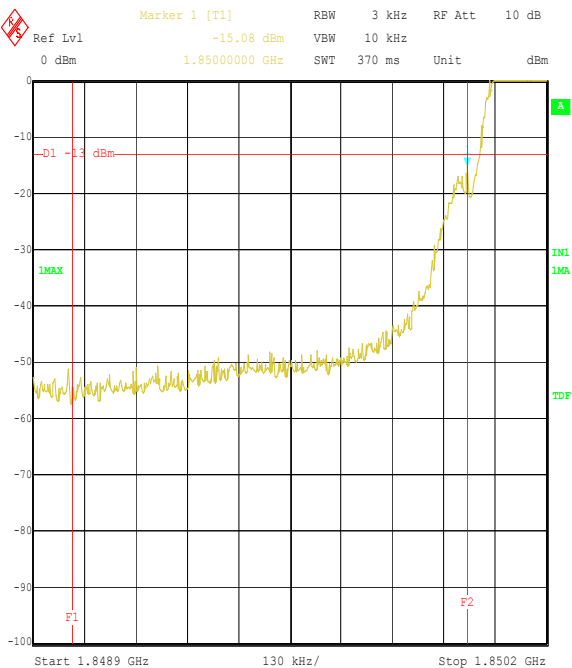

Title: SENDO Eut:S361 FCC P22/24, Radiated Band Edge
Comment A: 70871JD01 Bottom Channel
Date: 17.NOV.2004 11:25:32

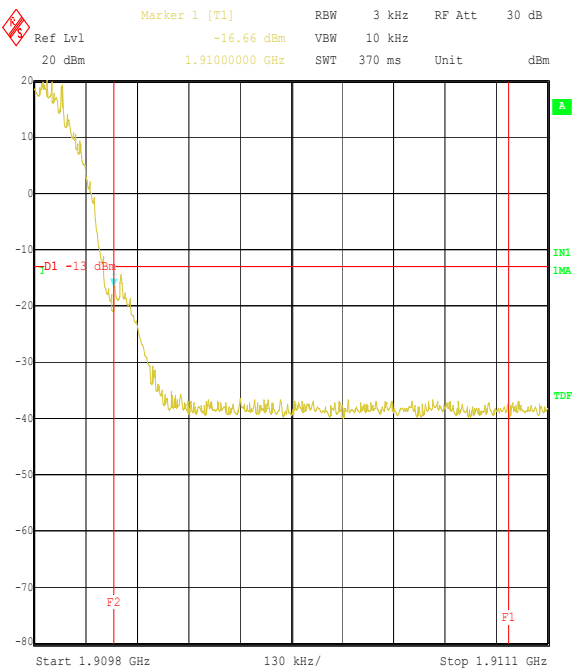

Title: SENDO Eut:S361 FCC P22/24, Radiated Band Edge.
Comment A: 70871JD01 Top Channel
Date: 17.NOV.2004 10:55:13

Test of: Sendo International Ltd
S361
To: FCC Part 22 & 24

8. Measurement Uncertainty

8.1. No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently, the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

8.2. The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

8.3. The uncertainty of the result may need to be taken into account when interpreting the measurement results.

8.4. The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor, such that a confidence level of approximately 95% is maintained. For the purposes of this document “approximately” is interpreted as meaning “effectively” or “for most practical purposes”.

| Measurement Type | Range | Confidence Level (%) | Calculated Uncertainty |
|----------------------------------|--------------------|-----------------------------|-------------------------------|
| AC Conducted Spurious Emissions | 0.15 MHz to 30 MHz | 95% | +/- 3.25 dB |
| Carrier Output Power | Not applicable | 95% | +/- 0.46 dB |
| Conducted Emissions | 9 kHz to 26 GHz | 95% | +/- 1.2 dB |
| Conducted Emissions Antenna Port | 30 MHz to 40 GHz | 95% | +/- 1.2 dB |
| Effective Radiated Power (ERP) | Not applicable | 95% | +/- 1.78 dB |
| Frequency Stability | Not applicable | 95% | +/- 20 Hz |
| Minimum Bandwidth | Not applicable | 95% | +/- 0.12 % |
| Occupied Bandwidth | 824 to 849 MHz | 95% | +/- 0.12 % |
| Radiated Spurious Emissions | 30 MHz to 1000 MHz | 95% | +/- 5.26 dB |
| Radiated Spurious Emissions | 1 GHz to 26 GHz | 95% | +/- 1.78 dB |

8.5. The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty, the published guidance of the appropriate accreditation body is followed.

Test of: Sendo International Ltd
S361
To: FCC Part 22 & 24

9. Measurement Methods

9.1. Effective Radiated Power (ERP)

ERP measurements were performed in accordance with the standard, against appropriate limits.

The ERP was measured with the EUT arranged on a non-conducting turn table on a standard test site compliant with ANSI C63.4 – 2001 Clause 5.4. The transmitter was fitted with an integral antenna; as such all radiated tests were performed with the unit operating into the integral antenna.

The level of the ERP was measured using a spectrum analyser.

The test antenna was positioned in the horizontal plane. The EUT was oriented in the X plane. The test antenna was then raised and lowered until a maximum peak was observed. The turntable was then rotated through 360 degrees and the maximum peak reading obtained. The height search was then repeated to take into consideration the new angular position of the turntable. The maximum reading observed was then recorded. This procedure was then repeated with the EUT oriented in the Y and Z planes. The highest reading taken in all 3 planes was recorded. The entire procedure was then repeated with the test antenna set in the Vertical polarity.

Once the final amplitude (maximised) had been obtained, the EUT was substituted with a substitution antenna. For ERP measurements a dipole antenna was used. The centre of the substitution antenna was set to approximately the same centre location as the EUT. The substitution antenna was set to the horizontal polarity. The substitution antenna was matched into a signal generator using a 6 dB or greater attenuator. The signal generator was tuned to the EUT's frequency under test.

The test antenna was then raised and lowered to obtain a maximum reading on the spectrum analyser. The level of the signal generator output was then adjusted until the maximum recorded EUT level was observed. The signal generator level was noted. This procedure was repeated with both test antenna and substitution antenna vertically polarised. The ERP was calculated as:-

$$\text{ERP} = \text{Signal Generator Level} - \text{Cable Loss} + \text{Antenna Gain}$$

Test of: Sendo International Ltd
S361
To: FCC Part 22 & 24

Effective Radiated Power (ERP) (Continued)

Circumstances where the signal generator could not produce the desired power substitution was performed with the signal generator set to 0 dBm. The radiated signal was maximised as previously described. The level indicated on the measuring receiver was noted. The delta between this level and the maximum level for the EUT was calculated and also noted. The ERP of the signal generator was calculated using the above formulae. The recorded delta was added to the calculated ERP to obtain the substituted EUT ERP.

$$\text{Delta (dB)} = \text{EUT} - \text{SG}$$

Where :

EUT = spectrum analyser indicated EUT raw level

SG = spectrum analyser indicated signal generator raw level

The signal generator actual ERP is calculated as:

$$\text{ERP SG} = \text{Signal Generator Level} - \text{Cable Loss} + \text{Antenna Gain}$$

The EUT ERP is calculated as:

$$\text{ERP EUT} = \text{ERP SG} + \text{Delta.}$$

The test equipment settings for ERP measurements were as follows:

| Receiver Function | Setting |
|-------------------|---------------------------|
| Detector Type: | Peak |
| Mode: | Not applicable |
| Bandwidth: | \geq Emission Bandwidth |
| Amplitude Range: | 100 dB |
| Sweep Time: | Coupled |

Test of: Sendo International Ltd
S361
To: FCC Part 22 & 24

9.2. Effective Isotropic Radiated Power (EIRP)

EIRP measurements were performed in accordance with the standard, against appropriate limits.

The EIRP was measured with the EUT arranged on a non-conducting turn table on a standard test site compliant with ANSI C63.4 – 2001 Clause 5.4. The transmitter was fitted with an integral antenna; therefore all radiated tests were performed with the unit operating into the integral antenna.

The level of the EIRP was measured using a spectrum analyser.

The test antenna was positioned in the horizontal plane. The EUT was oriented in the X plane. The test antenna was then raised and lowered until a maximum peak was observed. The turntable was then rotated through 360 degrees and the maximum peak reading obtained. The height search was then repeated to take into consideration the new angular position of the turntable. The maximum reading observed was then recorded. This procedure was then repeated with the EUT oriented in the Y and Z planes. The highest reading taken in all 3 planes was recorded. The entire procedure was then repeated with the test antenna set in the Vertical polarity.

Once the final amplitude (maximised) had been obtained, the EUT was substituted with a substitution antenna. For EIRP measurements a Horn antenna whose gain was based on an isotropic antenna was used, ERP measurements were done using a dipole. The centre of the substitution antenna was set to approximately the same centre location as the EUT. The substitution antenna was set to the horizontal polarity. The substitution antenna was matched into a signal generator using a 6 dB or greater attenuator. The signal generator was tuned to the EUT's frequency under test.

The test antenna was then raised and lowered to obtain a maximum reading on the spectrum analyser. The level of the signal generator output was then adjusted until the maximum recorded EUT level was observed. The signal generator level was noted. This procedure was repeated with both test antenna and substitution antenna vertically polarised. The EIRP was calculated as:-

$$\text{EIRP} = \text{Signal Generator Level} - \text{Cable Loss} + \text{Antenna Gain}$$

All measurements were performed using broadband Horn antennas.

Test of: Sendo International Ltd
S361
To: FCC Part 22 & 24

Effective Isotropic Radiated Power (EIRP) (Continued)

Circumstances where the signal generator could not produce the desired power substitution was performed with the signal generator set to 0 dBm. The radiated signal was maximised as previously described. The level indicated on the measuring receiver was noted. The delta between this level and the maximum level for the EUT was calculated and also noted. The EIRP of the signal generator was calculated using the above formulae. The recorded delta was added to the calculated EIRP to obtain the substituted EUT EIRP.

$$\text{Delta (dB)} = \text{EUT} - \text{SG}$$

where :

EUT = spectrum analyser indicated EUT raw level

SG = spectrum analyser indicated signal generator raw level

The signal generator actual EIRP is calculated as:

$$\text{EIRP SG} = \text{Signal Generator Level} - \text{Cable Loss} + \text{Antenna Gain}$$

The EUT EIRP is calculated as:

$$\text{EIRP EUT} = \text{EIRP SG} + \text{Delta.}$$

The test equipment settings for EIRP measurements were as follows:

| Receiver Function | Setting |
|-------------------|----------------|
| Detector Type: | Peak |
| Mode: | Not applicable |
| Bandwidth: | 1 MHz |
| Amplitude Range: | 100 dB |
| Sweep Time: | Coupled |

Test of: Sendo International Ltd
S361
To: FCC Part 22 & 24

9.3. Transmitter Radiated Emissions

Radiated emissions measurements were performed in accordance with the standard, against appropriate limits for each detector function.

Initial pre-scans covering the entire measurement band from the lowest generated frequency declared up to 10 times the highest fundamental frequency. The scans were performed within a screened chamber in order to identify frequencies on which the EUT was generating spurious. This procedure identified the frequencies from the EUT, which required further examination. Repetitive scans were performed to allow for emissions with low repetition rates, and for the duty cycle of the EUT.

The initial scans were performed using an antenna height of 1.5 m and a measurement distance of 3 m. A limit line was set to the specification limit by characterising the screen room using a known signal source set at exactly the same location as the EUT. The signal source was derived from either a horn antenna or a dipole dependant on the frequency band under investigation. Any levels within 20 dB of this limit were measured where possible, on occasion; the receiver noise floor came within the 20 dB boundary. On these occasions, the system noise floor may have been recorded.

An open area test site using the appropriate test distance and measuring receiver with a Peak detector was used for final measurements at each frequency recorded in the screen room.

The levels were maximised by initially rotating the turntable through 360° and then varying the antenna height between 1 m and 4 m in the vertical polarisation. At this point, any signals found to be between the limit and a level 6 dB below it were further maximised by changing the configuration of the EUT, e.g. re-routing cables to peripherals and moving peripherals with respect to the EUT. The procedure was repeated for the horizontal polarisation.

Once the final amplitude (maximised) had been obtained, the EUT was substituted with a substitution antenna. For EIRP measurements a Horn antenna whose gain was based on an isotropic antenna was used, ERP measurements were done using a dipole. The centre of the substitution antenna was set to approximately the same centre location as the EUT. The substitution antenna was set to the horizontal polarity. The substitution antenna was matched into a signal generator using a 6 dB or greater attenuator. The signal generator was tuned to the EUT's frequency under test.

The test antenna was then raised and lowered to obtain a maximum reading on the spectrum analyser. The level of the signal generator output was then adjusted until the maximum recorded EUT level was observed. The signal generator level was noted. This procedure was repeated with both test antenna and substitution antenna vertically polarised. The EIRP was calculated as:-

$$\text{EIRP} = \text{Signal Generator Level} - \text{Cable Loss} + \text{Antenna Gain}$$

The limit in the standard states that emissions shall be attenuated by at least $43 + 10 \log(P)$ dB below the transmitter power (P), where (P) is the maximum measured fundamental power for the channel under test. This limit always reduces to -13 dBm therefore, the limit line presented on the accompanying plots is set to -13 dBm.

Any spurious measured were then compared to the -13 dBm limit. The requirement is for the emission to be less than -13 dBm. The margin between emission and limit is recorded and should always be positive to indicate compliance.

All measurements were performed using broadband Horn antennas.

Test of: Sendo International Ltd
S361
To: FCC Part 22 & 24

Transmitter Radiated Emissions (Continued)

It should be noted that FCC Part 24.238 states that the 1st MHz band immediately adjacent to the applicants declared frequency block may be measured using a resolution bandwidth of at least 1% of the emission bandwidth. This bandwidth was found by calculating 1% of the bandwidth measured in the transmitter occupied bandwidth section of this report. The next largest available bandwidth above this calculated figure was, therefore, used i.e. 3 kHz.

The measurements in the 2nd and 3rd 1 MHz blocks away from the adjacent 1 MHz block from 1911 MHz to 1912 MHz and 1912 MHz to 1913 MHz were carried out using an analyser span of 1 MHz and a 100 kHz receiver resolution bandwidth (RBW). 10 linear readings were taken for each 100 kHz strip across the 1 MHz band. These readings were integrated to give the emission level in an equivalent 1 MHz bandwidth.

Test of: Sendo International Ltd
S361
To: FCC Part 22 & 24

9.4. Receiver Radiated Emissions

Radiated emissions measurements were performed in accordance with the standard, against appropriate limits for each detector function.

Initial pre-scans covering the entire measurement band from the lowest generated frequency declared up to the upper frequency detailed in Section 15.33(b) were performed within a screened chamber in order to identify frequencies on which the EUT was generating interference. This determined the frequencies from the EUT, which required further examination. In order to minimise the time taken for the swept measurements, a peak detector was used in conjunction with the appropriate detector measuring bandwidth (see table below). Repetitive scans were performed to allow for emissions with low repetition rates, and for the duty cycle of the EUT.

The initial scans were performed using an antenna height of 1.5 m and a measurement distance of 3 m. A limit line was set to the specification limit. Levels within 20dB of this limit were measured where possible, on occasion, the receiver noise floor came within the 20dB boundary. On these occasions, the system noise floor may have been recorded.

An open area test site using the appropriate test distance and measuring receiver with a Quasi-Peak detector was used for measurements below 1000 MHz, for measurements above 1000 MHz average and peak detectors were used.

For the final measurements the EUT was arranged on a non-conducting turn table on a standard test site compliant with ANSI C63.4 – 2001 Clause 5.4.

On the open area test site, at each frequency where a signal was found, the levels were maximised by initially rotating the turntable through 360° and then varying the antenna height between 1 m and 4 m in the horizontal polarisation. At this point, any signals found to be between the limit and a level 6 dB below it were further maximised by changing the configuration of the EUT, e.g. re-routing cables to peripherals and moving peripherals with respect to the EUT. The procedure was repeated for the vertical polarisation.

The final field strength was determined as the indicated level in dB μ V plus cable loss and antenna factor.

The test equipment settings for radiated emissions measurements were as follows:

| Receiver Function | Initial Scan | Final Measurements Below 1GHz | Final Measurements Above 1 GHz |
|-------------------|--------------------------------|-------------------------------|--------------------------------|
| Detector Type: | Peak | Quasi-Peak (CISPR) | Peak/Average |
| Mode: | Max Hold | Not applicable | Not applicable |
| Bandwidth: | (120 kHz < 1GHz) (1MHz > 1GHz) | 120 kHz | 1 MHz (If Applicable) |
| Amplitude Range: | 60 dB | 20 dB | 20 dB (typical) |
| Step Size: | Continuous sweep | Not applicable | Not applicable |
| Sweep Time: | Coupled | Not applicable | Not applicable |

Test of: Sendo International Ltd
S361
To: FCC Part 22 & 24

Appendix 1. Test Equipment Used

| RFI No. | Instrument | Manufacturer | Type No. | Serial No. |
|---------|-----------------------------|-----------------|-------------------------|------------|
| A027 | Horn Antenna | Eaton | 9188-2 | 301 |
| A059 | 3146 Log Periodic Antenna | EMCO | 3146 | 8902-2378 |
| A091 | EMCO 3110 Biconical Antenna | EMCO | 3110 | 9008-1182 |
| A1063 | N-M Offset Short | Maury Microwave | 8807C | 294 |
| A259 | Bilog Antenna | Chase | CBL6111 | 1513 |
| A392 | 3 dB attenuator (9) | Suhner | 6803.17.B | None |
| A427 | WG 14 horn | Flann | 14240-20 | 150 |
| A428 | WG 12 horn | Flann | 12240-20 | 134 |
| A429 | WG 16 horn | Flann | 16240-20 | 561 |
| A430 | WG 18 horn | Flann | 18240-20 | 425 |
| A436 | WG 20 horn | Flann | 20240-20 | 330 |
| A512 | Wave Guide Antenna | EMCO | 3115 | 3993 |
| A513 | Bi-Con | Rohde & Schwarz | HK116 | 829822/002 |
| C1065 | Rosenberger | Rosenberger | UFA210-1-7872 | 0985 |
| C1078 | Rosenberger 3m Cable | Rosenberger | FA210A1030M 5050 | 28464-2 |
| C373 | Cable | Rosenberger | RG400 | None |
| C572 | C572-N-N-2 | Rosenberger | UFA210A-1- 788-50x50 | 97E0935 |
| C573 | C573-N-N-2 | Rosenberger | UFA210A-1- 788-50x50 | 97E0936 |

Test of: Sendo International Ltd
S361
To: FCC Part 22 & 24

Test Equipment Used (Continued)

| RFI No. | Instrument | Manufacturer | Type No. | Serial No. |
|---------|-----------------------|-----------------|----------|---|
| M003 | Spectrum Monitor | Rohde & Schwarz | EZM | 883 580/008 |
| M028 | FSB Spectrum Analyser | Rohde & Schwarz | FSB | 860 001/009 (RF), 860 161/007 (Display) |
| M044 | ESVP Receiver | Rohde & Schwarz | ESVP | 891 845/026 |
| M093 | HP Oscilloscope | Hewlett Packard | 54520A | US34360744 |
| M1093 | Will tek | Will tek | 4202S | 0513018 |
| M1124 | Rohde & Schwarz | Rohde & Schwarz | ESIB26 | 100046K |
| S201 | Site 1 | RFI | 1 | |
| S202 | Site 2 | RFI | 2 | S202-15011990 |

NB In accordance with UKAS requirements, all the measurement equipment is on a calibration schedule.

Test of: Sendo International Ltd
S361
To: FCC Part 22 & 24


Appendix 2. Test Configuration Drawings

This appendix contains the following drawings:

| Drawing Reference Number | Title |
|--------------------------|---|
| DRG\70871JD01\EMIRAD | Test configuration for measurement of radiated emissions. |

Test of: Sendo International Ltd
S361
To: FCC Part 22 & 24

DRG\70871JD01\EMIRAD

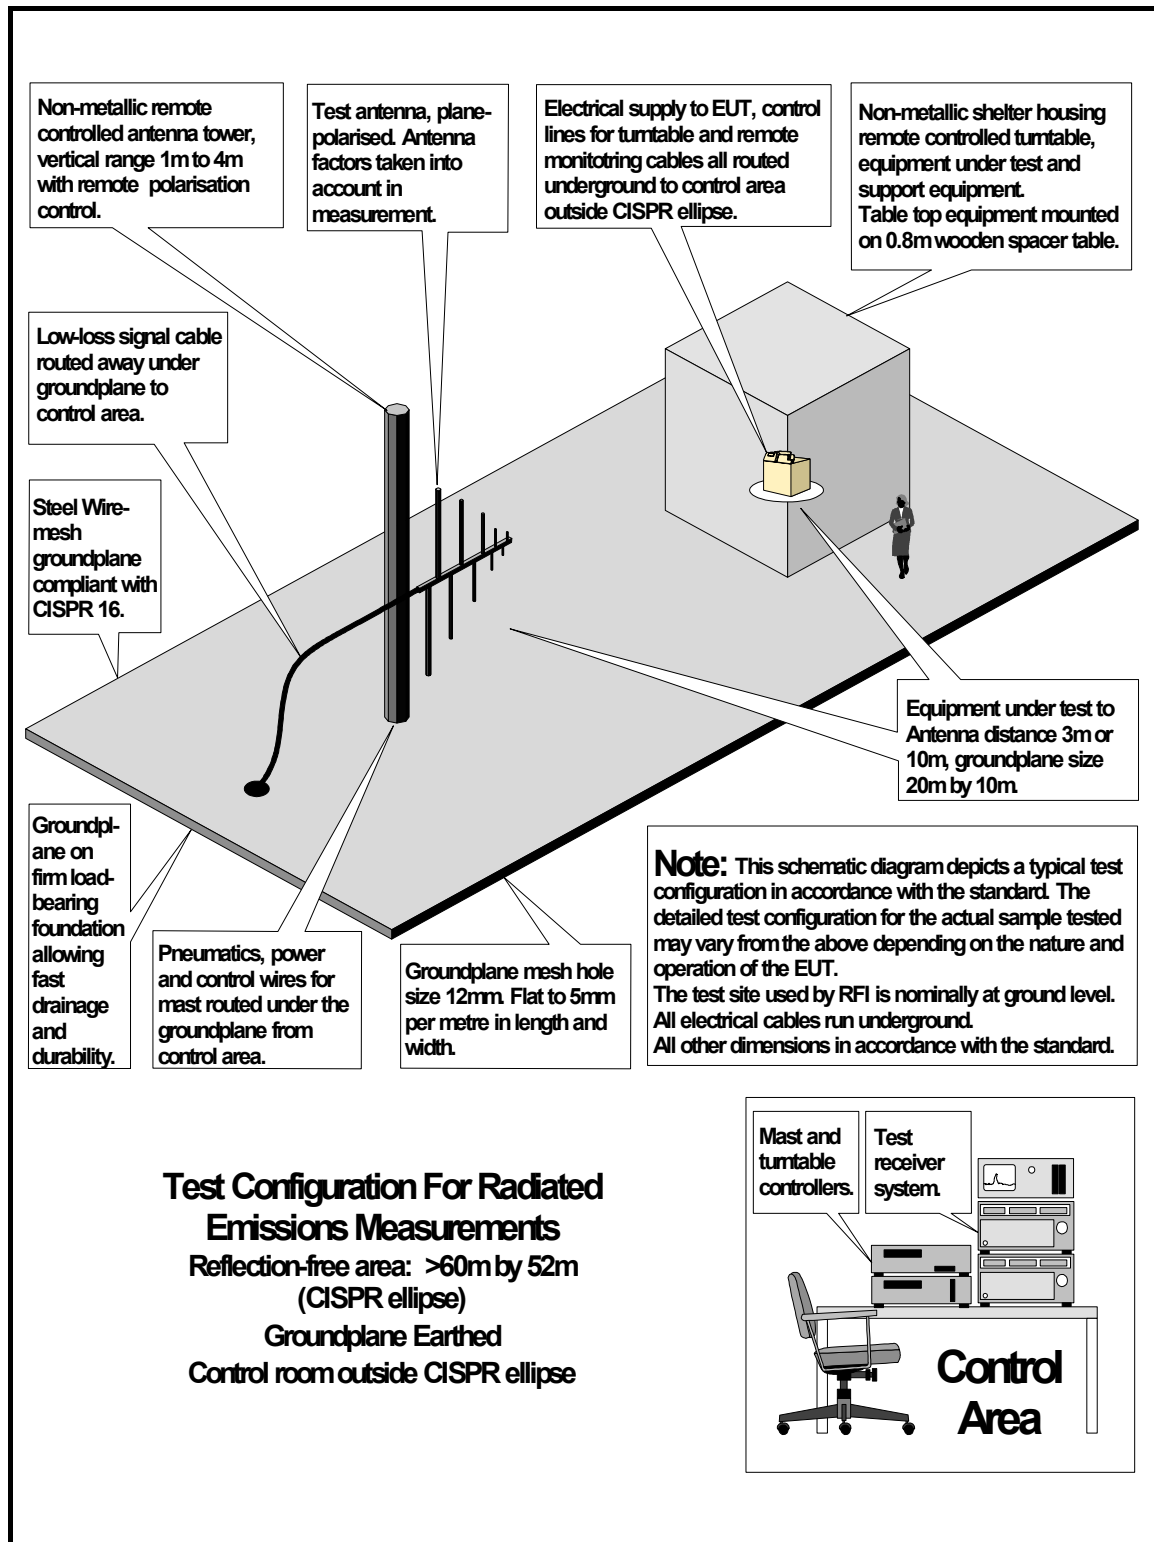

Test of: Sendo International Ltd

S361

To: FCC Part 22 & 24

This page has been left intentionally blank.