

#01 HAC_E_GSM850_GSM Voice_Ch128**DUT: 360415**

Communication System: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2013/1/21;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2013/1/28
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Ch128/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 77.03 V/m; Power Drift = 0.02 dB

PMF = 2.600 is applied.

E-field emissions = 157.1 V/m

Near-field category: M3 (AWF -5 dB)

PMF scaled E-field


Grid 1 M4 140.6 V/m	Grid 2 M3 153.9 V/m	Grid 3 M4 148.0 V/m
Grid 4 M4 144.5 V/m	Grid 5 M3 157.1 V/m	Grid 6 M3 151.2 V/m
Grid 7 M4 144.0 V/m	Grid 8 M3 155.9 V/m	Grid 9 M3 150.1 V/m

Cursor:

Total = 157.1 V/m

E Category: M3

Location: -3, 4, 8.7 mm



0 dB = 174.1 V/m = 44.82 dBV/m

#02 HAC_E_GSM850_GSM Voice_Ch189**DUT: 360415**

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2013/1/21;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2013/1/28
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Ch189/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 73.31 V/m; Power Drift = 0.00 dB

PMF = 2.600 is applied.

E-field emissions = 148.8 V/m

Near-field category: M4 (AWF -5 dB)

PMF scaled E-field


Grid 1 M4 139.3 V/m	Grid 2 M4 147.5 V/m	Grid 3 M4 140.2 V/m
Grid 4 M4 139.1 V/m	Grid 5 M4 148.8 V/m	Grid 6 M4 141.5 V/m
Grid 7 M4 136.7 V/m	Grid 8 M4 146.6 V/m	Grid 9 M4 139.9 V/m

Cursor:

Total = 148.8 V/m

E Category: M4

Location: -1.5, 2.5, 8.7 mm

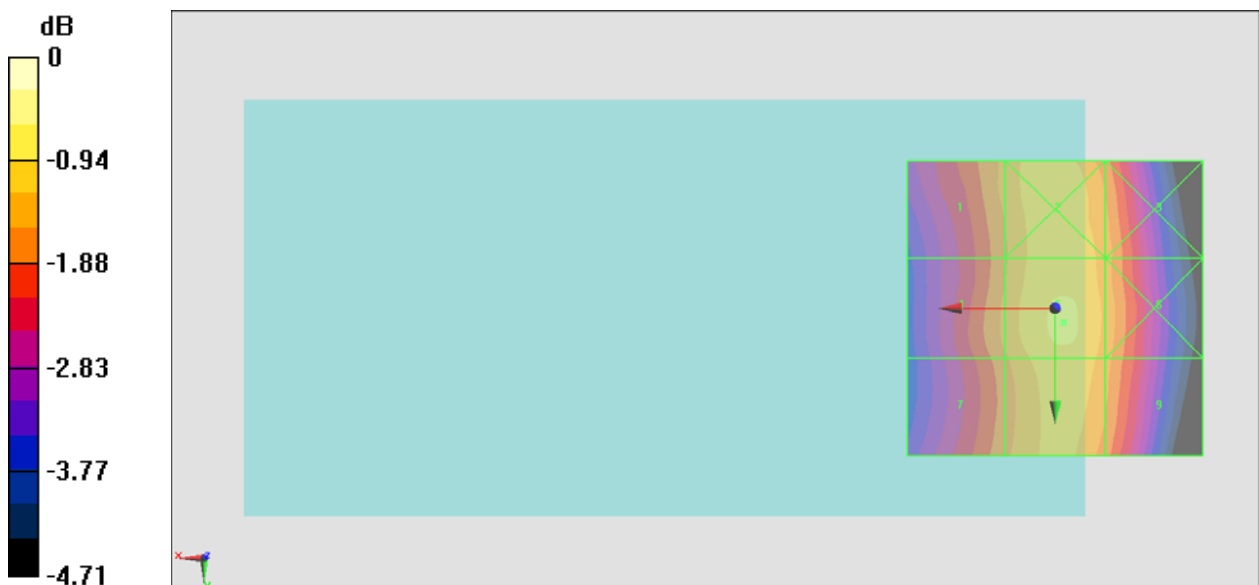

0 dB = 164.8 V/m = 44.34 dBV/m

#03 HAC_E_GSM850_GSM Voice_Ch251**DUT: 360415**

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2013/1/21;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2013/1/28
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Ch251/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 80.96 V/m; Power Drift = 0.01 dB

PMF = 2.600 is applied.

E-field emissions = 164.9 V/m

Near-field category: M3 (AWF -5 dB)

PMF scaled E-field



Grid 1 M4 146.7 V/m	Grid 2 M3 162.0 V/m	Grid 3 M3 156.8 V/m
Grid 4 M4 149.2 V/m	Grid 5 M3 164.9 V/m	Grid 6 M3 160.1 V/m
Grid 7 M4 147.4 V/m	Grid 8 M3 163.9 V/m	Grid 9 M3 159.1 V/m

Cursor:

Total = 117.0 V/m

E Category: M4

Location: 25, -25, 8.7 mm

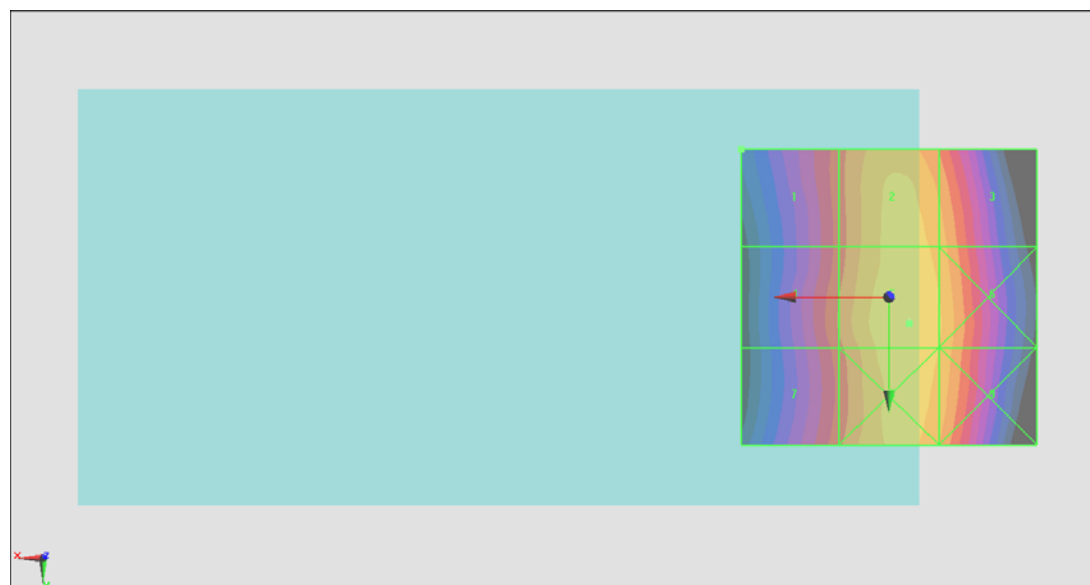

0 dB = 182.8 V/m = 45.24 dBV/m

#04 HAC_E_GSM1900_GSM Voice_Ch512**DUT: 360415**

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2013/1/21;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2013/1/28
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Ch512/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 28.71 V/m; Power Drift = 0.00 dB

PMF = 2.660 is applied.

E-field emissions = 80.38 V/m

Near-field category: M3 (AWF -5 dB)

PMF scaled E-field



Grid 1 M3	Grid 2 M2	Grid 3 M2
73.68 V/m	96.82 V/m	95.36 V/m
Grid 4 M3	Grid 5 M3	Grid 6 M3
54.09 V/m	80.38 V/m	80.36 V/m
Grid 7 M3	Grid 8 M3	Grid 9 M3
58.20 V/m	55.64 V/m	56.00 V/m

Cursor:

Total = 96.82 V/m

E Category: M2

Location: -5.5, -25, 8.7 mm

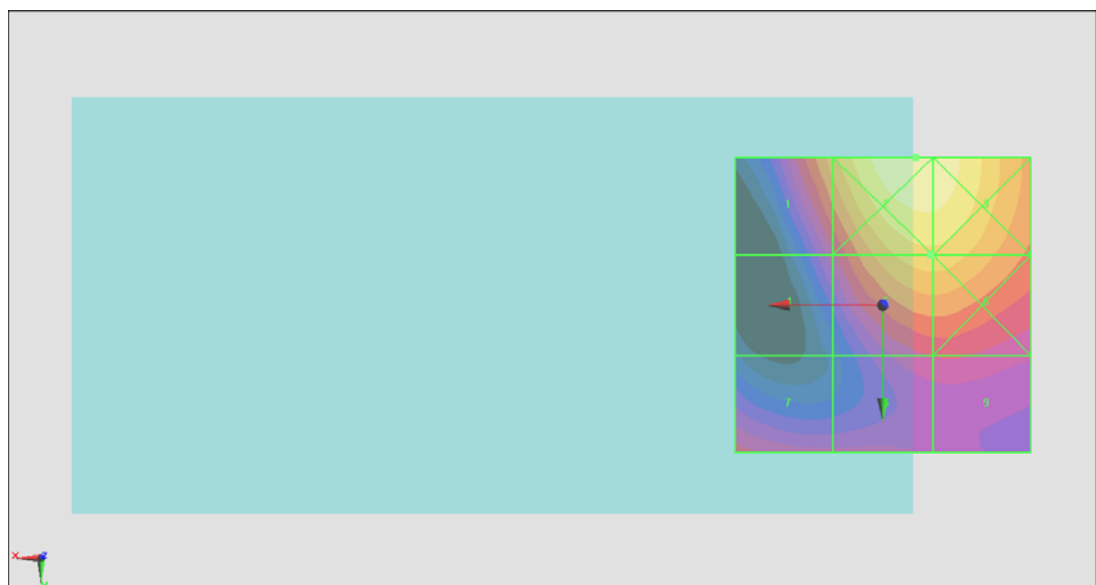

0 dB = 104.9 V/m = 40.42 dBV/m

#05 HAC_E_GSM1900_GSM Voice_Ch661**DUT: 360415**

Communication System: PCS; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2013/1/21;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2013/1/28
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Ch661/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 28.43 V/m; Power Drift = 0.04 dB

PMF = 2.660 is applied.

E-field emissions = 79.82 V/m

Near-field category: M3 (AWF -5 dB)

PMF scaled E-field



Grid 1 M3 73.18 V/m	Grid 2 M2 96.12 V/m	Grid 3 M2 95.04 V/m
Grid 4 M3 53.94 V/m	Grid 5 M3 79.82 V/m	Grid 6 M3 79.75 V/m
Grid 7 M3 58.68 V/m	Grid 8 M3 55.28 V/m	Grid 9 M3 55.45 V/m

Cursor:

Total = 96.12 V/m

E Category: M2

Location: -5.5, -25, 8.7 mm

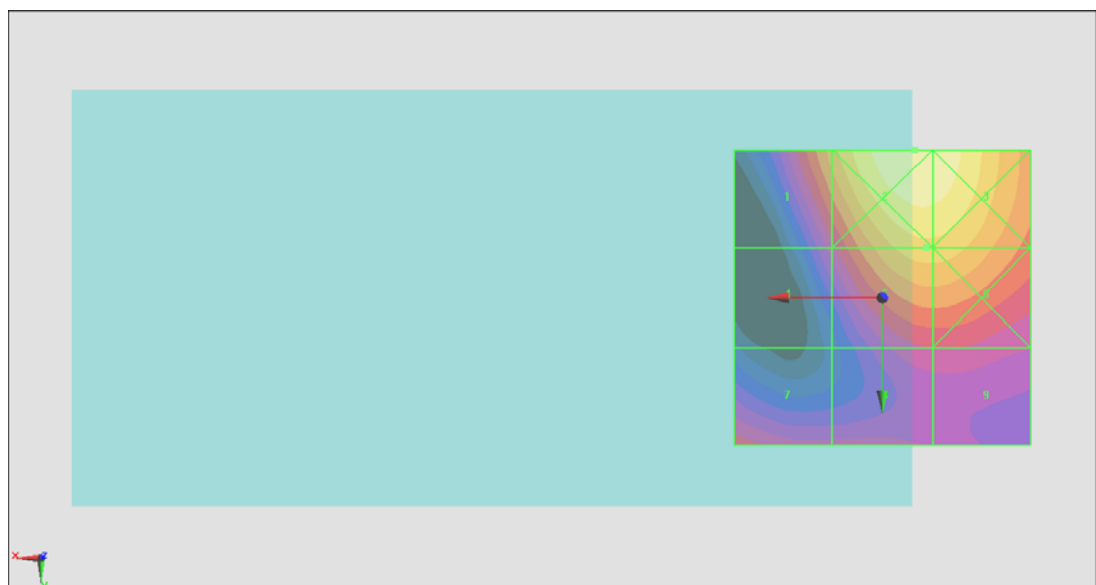

0 dB = 104.1 V/m = 40.35 dBV/m

#06 HAC_E_GSM1900_GSM Voice_Ch810**DUT: 360415**

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2013/1/21;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2013/1/28
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Ch810/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 27.76 V/m; Power Drift = 0.05 dB

PMF = 2.660 is applied.

E-field emissions = 80.35 V/m

Near-field category: M3 (AWF -5 dB)

PMF scaled E-field



Grid 1 M3	Grid 2 M2	Grid 3 M2
76.28 V/m	98.84 V/m	97.05 V/m
Grid 4 M3	Grid 5 M3	Grid 6 M3
55.54 V/m	80.35 V/m	80.26 V/m
Grid 7 M3	Grid 8 M3	Grid 9 M3
58.02 V/m	55.94 V/m	57.08 V/m

Cursor:

Total = 43.52 V/m

E Category: M4

Location: 25, -25, 8.7 mm

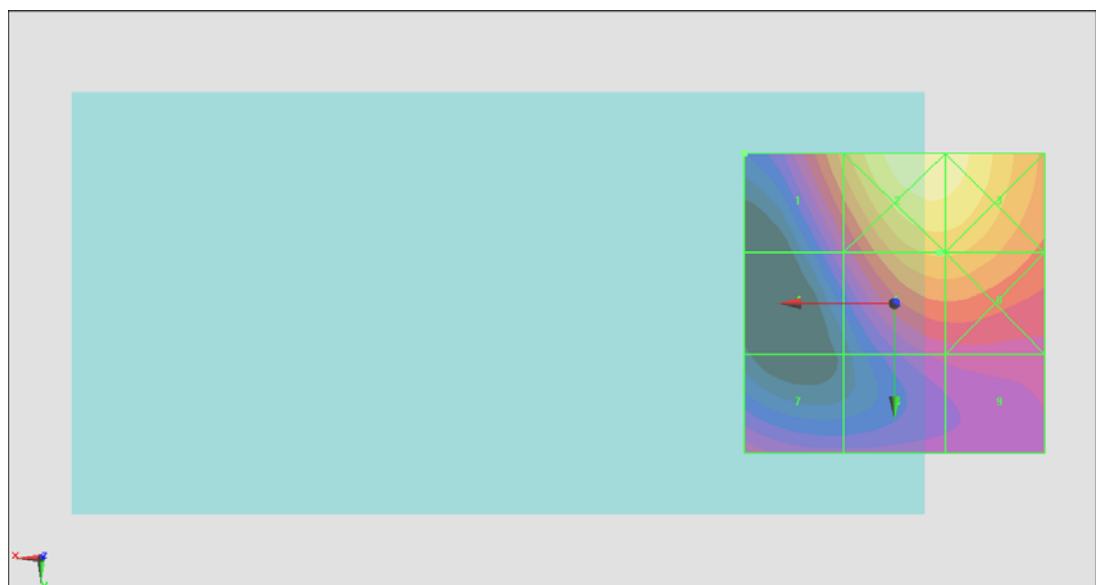

0 dB = 107.1 V/m = 40.60 dBV/m

#07 HAC_E_WCDMA V_AMR 12.2Kbps_Ch4132**DUT: 360415**

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2013/1/21;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2013/1/28
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Ch4132/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 61.44 V/m; Power Drift = 0.05 dB

PMF = 1.000 is applied.

E-field emissions = 48.70 V/m

Near-field category: M4 (AWF 0 dB)

PMF scaled E-field



Grid 1 M4 43.98 V/m	Grid 2 M4 47.66 V/m	Grid 3 M4 45.63 V/m
Grid 4 M4 44.92 V/m	Grid 5 M4 48.70 V/m	Grid 6 M4 46.77 V/m
Grid 7 M4 44.84 V/m	Grid 8 M4 48.37 V/m	Grid 9 M4 46.53 V/m

Cursor:

Total = 48.70 V/m

E Category: M4

Location: -2.5, 3.5, 8.7 mm

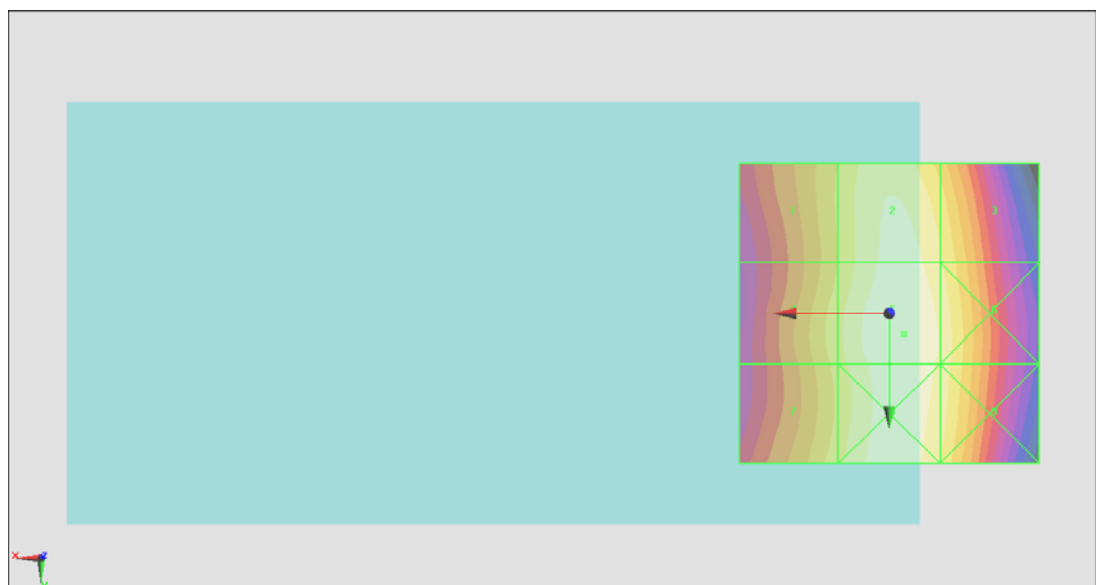

0 dB = 48.70 V/m = 33.75 dBV/m

#08 HAC_E_WCDMA V_AMR 12.2Kbps_Ch4182**DUT: 360415**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2013/1/21;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2013/1/28
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Ch4182/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 59.24 V/m; Power Drift = -0.03 dB

PMF = 1.000 is applied.

E-field emissions = 46.25 V/m

Near-field category: M4 (AWF 0 dB)

PMF scaled E-field


Grid 1 M4 43.18 V/m	Grid 2 M4 45.71 V/m	Grid 3 M4 43.58 V/m
Grid 4 M4 43.26 V/m	Grid 5 M4 46.25 V/m	Grid 6 M4 43.98 V/m
Grid 7 M4 42.59 V/m	Grid 8 M4 45.81 V/m	Grid 9 M4 43.66 V/m

Cursor:

Total = 46.25 V/m

E Category: M4

Location: -1, 2.5, 8.7 mm

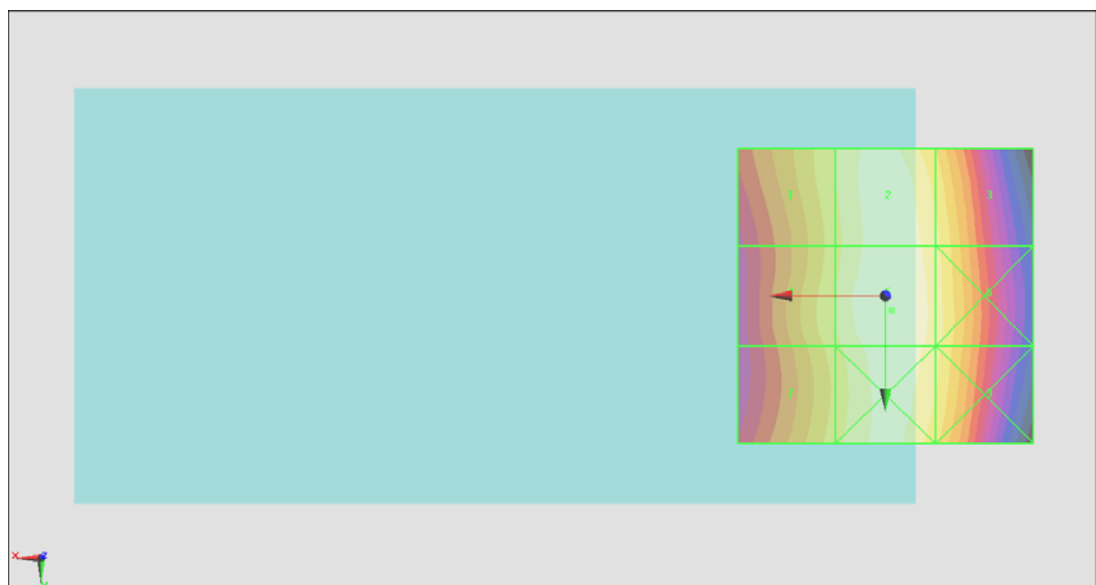

0 dB = 46.25 V/m = 33.30 dBV/m

#09 HAC_E_WCDMA V_AMR 12.2Kbps_Ch4233**DUT: 360415**

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2013/1/21;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2013/1/28
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Ch4233/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 64.06 V/m; Power Drift = 0.01 dB

PMF = 1.000 is applied.

E-field emissions = 50.75 V/m

Near-field category: M4 (AWF 0 dB)

PMF scaled E-field



Grid 1 M4 45.19 V/m	Grid 2 M4 49.64 V/m	Grid 3 M4 47.84 V/m
Grid 4 M4 46.20 V/m	Grid 5 M4 50.75 V/m	Grid 6 M4 48.99 V/m
Grid 7 M4 46.00 V/m	Grid 8 M4 50.41 V/m	Grid 9 M4 48.73 V/m

Cursor:

Total = 50.75 V/m

E Category: M4

Location: -3, 4, 8.7 mm

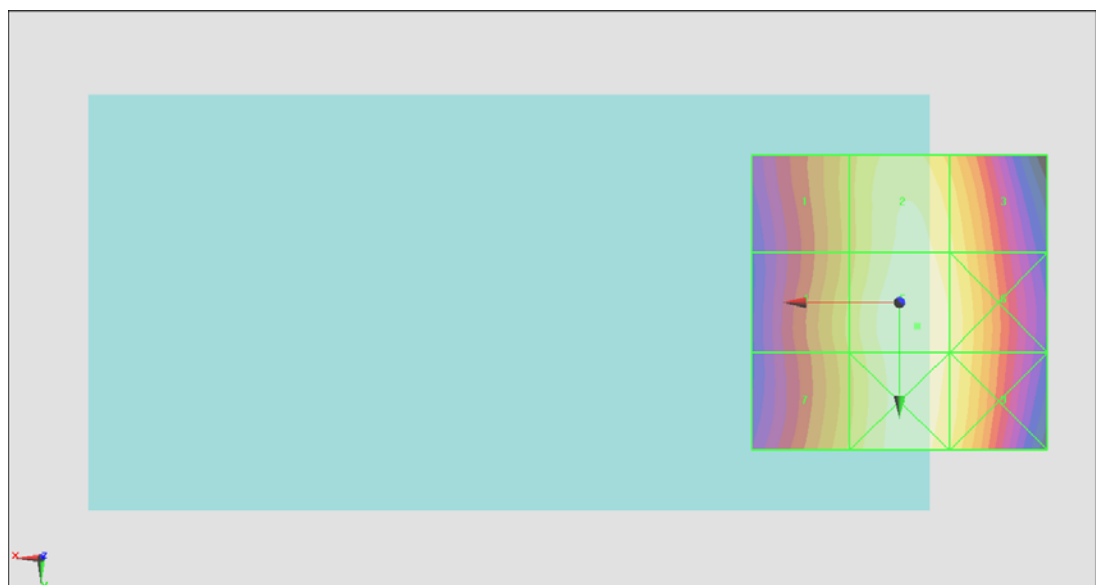

0 dB = 50.75 V/m = 34.11 dBV/m

#10 HAC_E_WCDMA IV_AMR 12.2Kbps_Ch1312**DUT: 360415**

Communication System: WCDMA; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2013/1/21;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2013/1/28
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Ch1312/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 31.16 V/m; Power Drift = 0.04 dB

PMF = 0.98 is applied.

E-field emissions = 30.73 V/m

Near-field category: M4 (AWF 0 dB)

PMF scaled E-field



Grid 1 M4 30.97 V/m	Grid 2 M4 36.51 V/m	Grid 3 M4 35.61 V/m
Grid 4 M4 23.55 V/m	Grid 5 M4 30.73 V/m	Grid 6 M4 30.61 V/m
Grid 7 M4 22.23 V/m	Grid 8 M4 22.31 V/m	Grid 9 M4 22.31 V/m

Cursor:

Total = 36.51 V/m

E Category: M4

Location: -3.5, -25, 8.7 mm

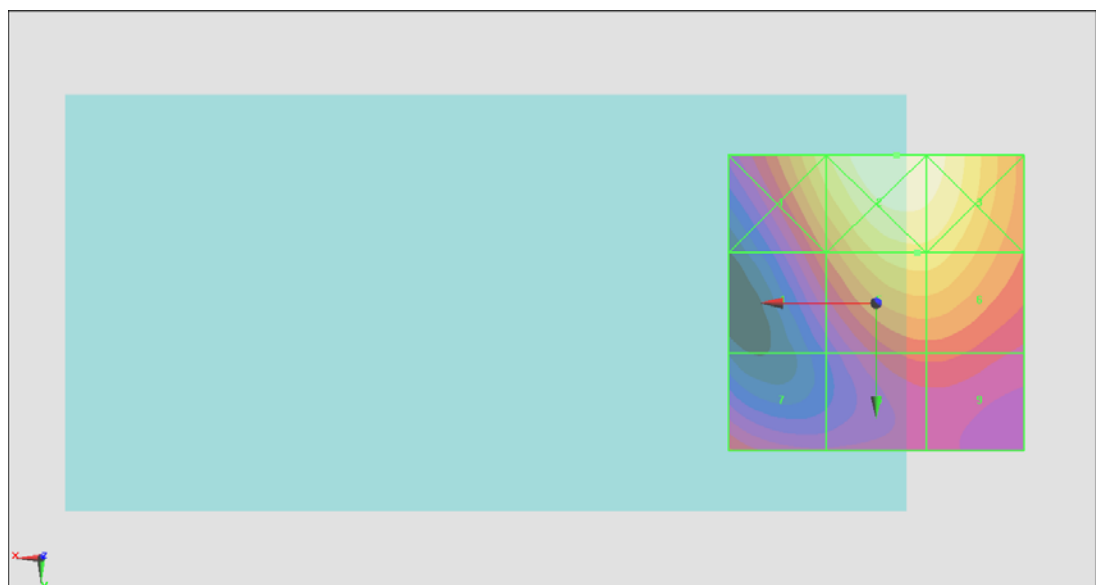

0 dB = 36.51 V/m = 31.25 dBV/m

#11 HAC_E_WCDMA IV_AMR 12.2Kbps_Ch1413**DUT: 360415**

Communication System: WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2013/1/21;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2013/1/28
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Ch1413/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 30.68 V/m; Power Drift = -0.00 dB

PMF = 0.98 is applied.

E-field emissions = 29.24 V/m

Near-field category: M4 (AWF 0 dB)

PMF scaled E-field



Grid 1 M4 27.66 V/m	Grid 2 M4 33.67 V/m	Grid 3 M4 33.16 V/m
Grid 4 M4 21.70 V/m	Grid 5 M4 29.24 V/m	Grid 6 M4 29.22 V/m
Grid 7 M4 19.31 V/m	Grid 8 M4 21.65 V/m	Grid 9 M4 21.73 V/m

Cursor:

Total = 33.67 V/m

E Category: M4

Location: -4.5, -25, 8.7 mm

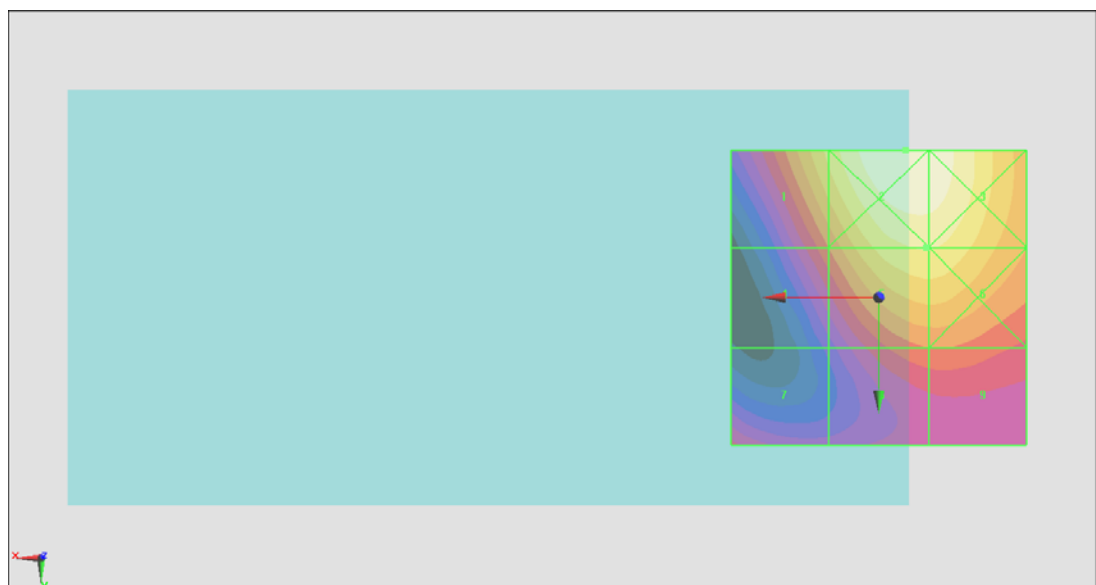

0 dB = 33.67 V/m = 30.54 dBV/m

#12 HAC_E_WCDMA IV_AMR 12.2Kbps_Ch1513**DUT: 360415**

Communication System: WCDMA; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2013/1/21;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2013/1/28
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Ch1513/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 33.62 V/m; Power Drift = 0.05 dB

PMF = 0.98 is applied.

E-field emissions = 32.15 V/m

Near-field category: M4 (AWF 0 dB)

PMF scaled E-field



Grid 1 M4 31.59 V/m	Grid 2 M4 38.38 V/m	Grid 3 M4 37.33 V/m
Grid 4 M4 23.86 V/m	Grid 5 M4 32.15 V/m	Grid 6 M4 31.99 V/m
Grid 7 M4 21.86 V/m	Grid 8 M4 23.21 V/m	Grid 9 M4 23.22 V/m

Cursor:

Total = 38.38 V/m

E Category: M4

Location: -3.5, -25, 8.7 mm

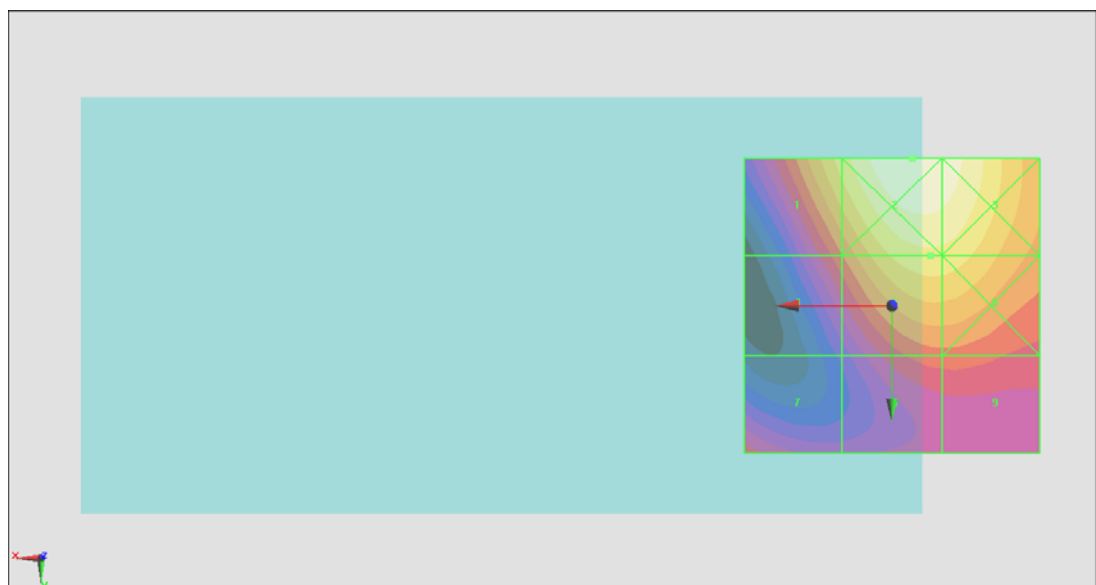

0 dB = 38.38 V/m = 31.68 dBV/m

#13 HAC_E_WCDMA II_AMR 12.2Kbps_Ch9262**DUT: 360415**

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2013/1/21;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2013/1/28
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Ch9262/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 33.19 V/m; Power Drift = -0.03 dB

PMF = 0.98 is applied.

E-field emissions = 32.66 V/m

Near-field category: M4 (AWF 0 dB)

PMF scaled E-field


Grid 1 M4 29.50 V/m	Grid 2 M4 38.56 V/m	Grid 3 M4 38.04 V/m
Grid 4 M4 22.56 V/m	Grid 5 M4 32.66 V/m	Grid 6 M4 32.57 V/m
Grid 7 M4 24.18 V/m	Grid 8 M4 23.39 V/m	Grid 9 M4 23.42 V/m

Cursor:

Total = 15.45 V/m

E Category: M4

Location: 25, -25, 8.7 mm

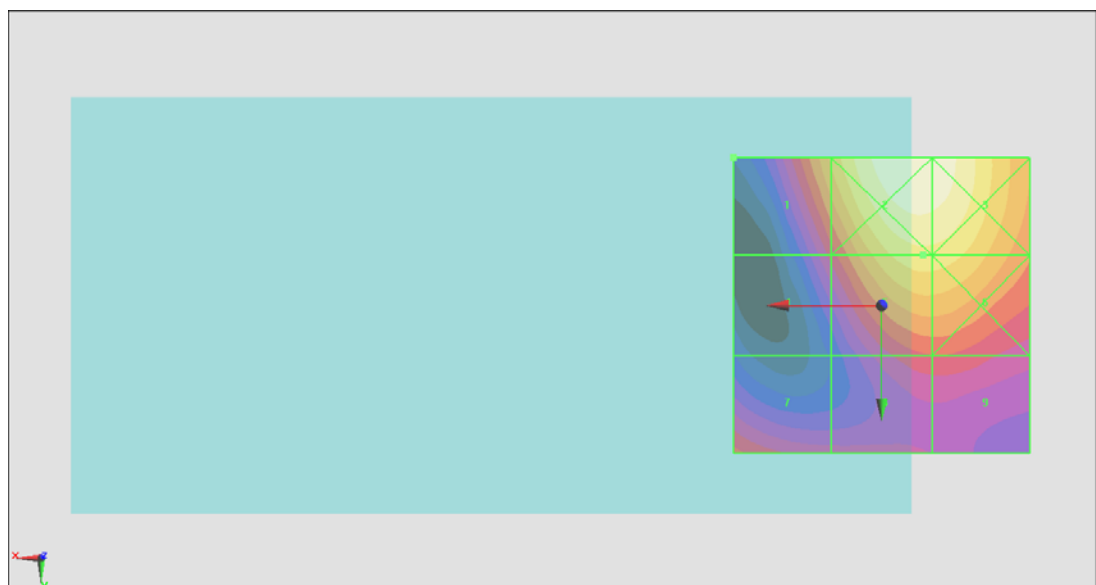

0 dB = 38.56 V/m = 31.72 dBV/m

#14 HAC_E_WCDMA II_AMR 12.2Kbps_Ch9400**DUT: 360415**

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2013/1/21;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2013/1/28
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Ch9400/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 34.90 V/m; Power Drift = 0.03 dB

PMF = 0.98 is applied.

E-field emissions = 35.49 V/m

Near-field category: M4 (AWF 0 dB)

PMF scaled E-field



Grid 1 M4 33.72 V/m	Grid 2 M4 43.00 V/m	Grid 3 M4 42.23 V/m
Grid 4 M4 24.76 V/m	Grid 5 M4 35.49 V/m	Grid 6 M4 35.37 V/m
Grid 7 M4 25.16 V/m	Grid 8 M4 23.26 V/m	Grid 9 M4 23.33 V/m

Cursor:

Total = 43.00 V/m

E Category: M4

Location: -5, -25, 8.7 mm

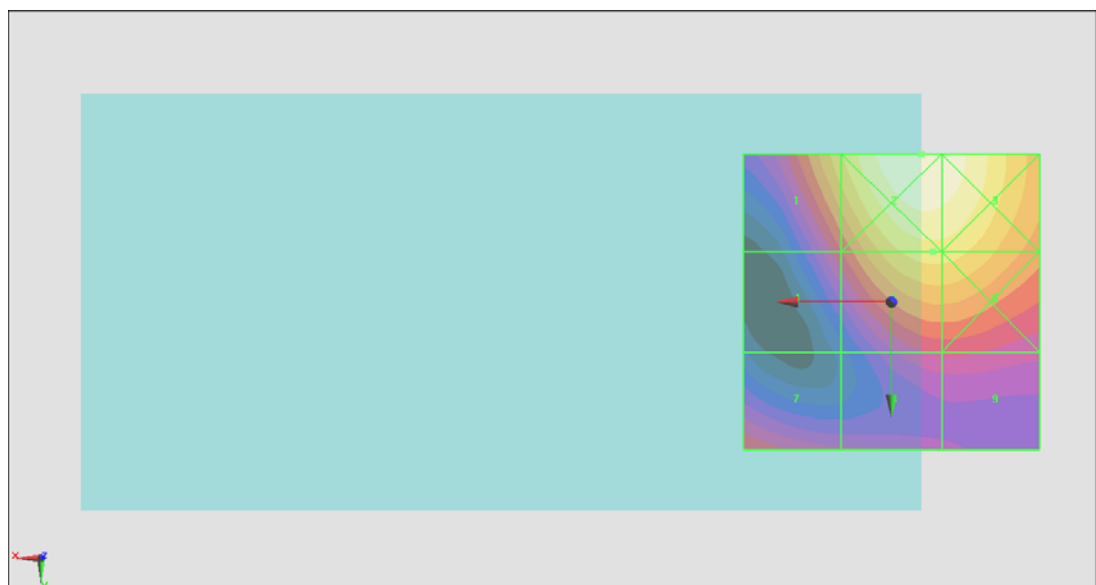

0 dB = 43.00 V/m = 32.67 dBV/m

#15 HAC_E_WCDMA II_AMR 12.2Kbps_Ch9538**DUT: 360415**

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C

DASY5 Configuration:

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2013/1/21;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2013/1/28
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Ch9538/E Scan - ER3D: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 34.68 V/m; Power Drift = -0.06 dB

PMF = 0.98 is applied.

E-field emissions = 34.88 V/m

Near-field category: M4 (AWF 0 dB)

PMF scaled E-field



Grid 1 M4 33.02 V/m	Grid 2 M4 41.74 V/m	Grid 3 M4 40.96 V/m
Grid 4 M4 24.79 V/m	Grid 5 M4 34.88 V/m	Grid 6 M4 34.78 V/m
Grid 7 M4 23.51 V/m	Grid 8 M4 24.90 V/m	Grid 9 M4 25.07 V/m

Cursor:

Total = 41.74 V/m

E Category: M4

Location: -5, -25, 8.7 mm

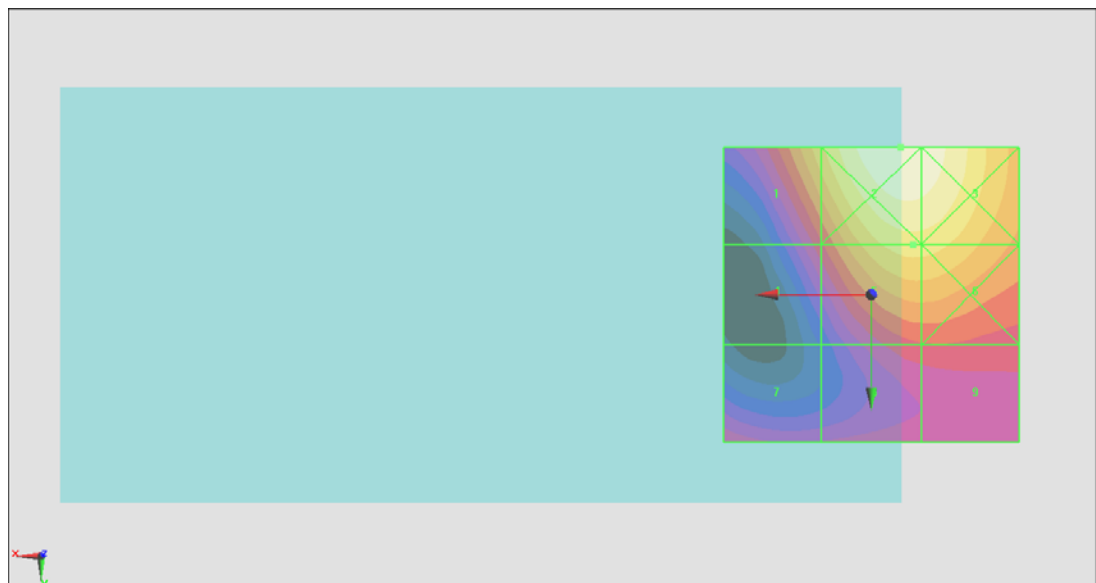

0 dB = 41.74 V/m = 32.41 dBV/m

#16 HAC_H_GSM850_GSM Voice_Ch128**DUT: 360415**

Communication System: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 22.6 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6184; ; Calibrated: 2013/1/21
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2013/1/28
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Ch128/H Scan - H3DV6: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.05100 A/m; Power Drift = -0.11 dB

PMF = 2.520 is applied.

H-field emissions = 0.2551 A/m

Near-field category: M4 (AWF -5 dB)

PMF scaled H-field



Grid 1 M4	Grid 2 M4	Grid 3 M4
0.255 A/m	0.181 A/m	0.118 A/m
Grid 4 M4	Grid 5 M4	Grid 6 M4
0.227 A/m	0.163 A/m	0.102 A/m
Grid 7 M4	Grid 8 M4	Grid 9 M4
0.250 A/m	0.176 A/m	0.106 A/m

Cursor:

Total = 0.2551 A/m

H Category: M4

Location: 25, -25, 8.7 mm

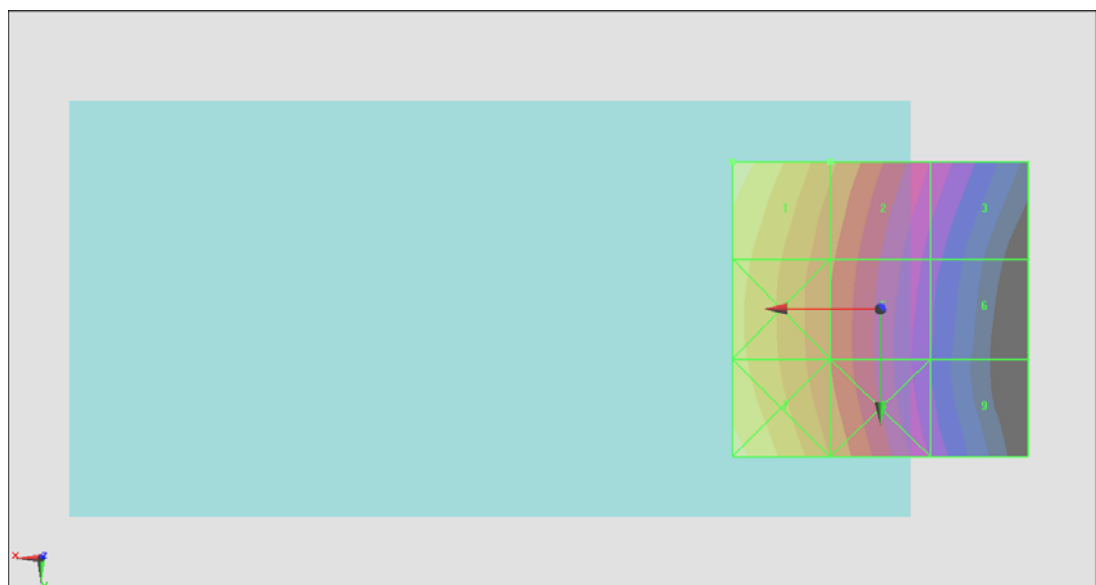

0 dB = 0.2916 A/m = -10.70 dBA/m

#17 HAC_H_GSM850_GSM Voice_Ch189**DUT: 360415**

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 22.6 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6184; ; Calibrated: 2013/1/21
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2013/1/28
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Ch189/H Scan - H3DV6: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.06000 A/m; Power Drift = -0.03 dB

PMF = 2.520 is applied.

H-field emissions = 0.2938 A/m

Near-field category: M4 (AWF -5 dB)

PMF scaled H-field

Grid 1 M4 0.319 A/m	Grid 2 M4 0.222 A/m	Grid 3 M4 0.136 A/m
Grid 4 M4 0.283 A/m	Grid 5 M4 0.200 A/m	Grid 6 M4 0.123 A/m
Grid 7 M4 0.294 A/m	Grid 8 M4 0.204 A/m	Grid 9 M4 0.121 A/m

Cursor:

Total = 0.3193 A/m

H Category: M4

Location: 25, -25, 8.7 mm



0 dB = 0.3650 A/m = -8.75 dBA/m

#18 HAC_H_GSM850_GSM Voice_Ch251**DUT: 360415**

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 22.6 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6184; ; Calibrated: 2013/1/21
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2013/1/28
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Ch251/H Scan - H3DV6: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.05600 A/m; Power Drift = 0.02 dB

PMF = 2.520 is applied.

H-field emissions = 0.2911 A/m

Near-field category: M4 (AWF -5 dB)

PMF scaled H-field


Grid 1 M4 0.291 A/m	Grid 2 M4 0.210 A/m	Grid 3 M4 0.139 A/m
Grid 4 M4 0.253 A/m	Grid 5 M4 0.184 A/m	Grid 6 M4 0.121 A/m
Grid 7 M4 0.258 A/m	Grid 8 M4 0.183 A/m	Grid 9 M4 0.110 A/m

Cursor:

Total = 0.2911 A/m

H Category: M4

Location: 25, -25, 8.7 mm

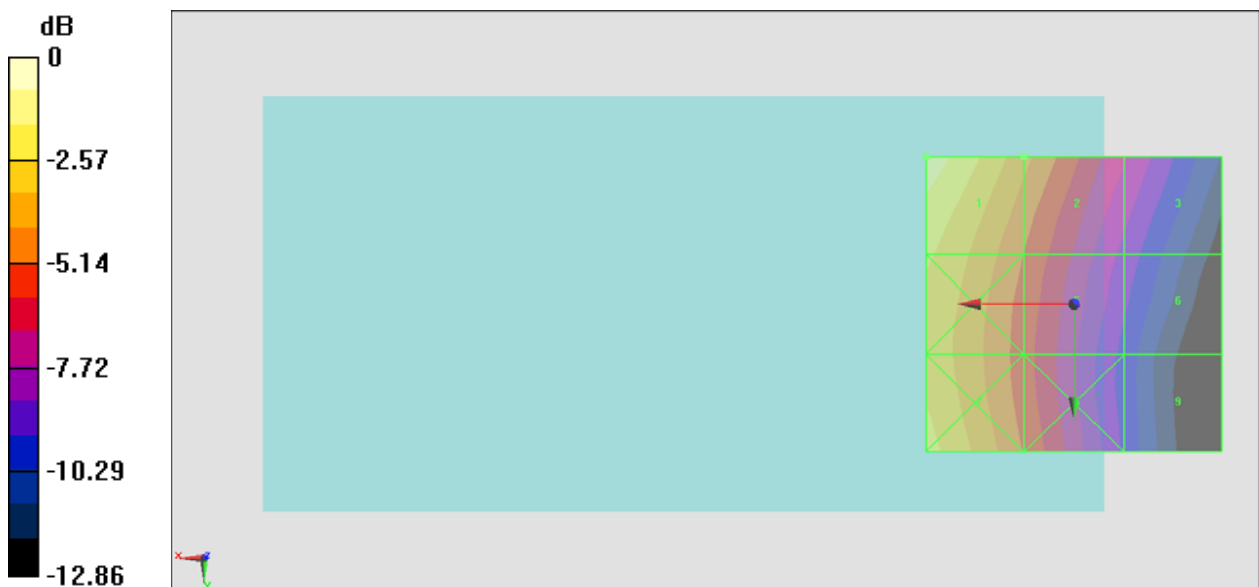

0 dB = 0.3328 A/m = -9.56 dBA/m

#28 HAC_H_GSM1900_GSM Voice_Ch512**DUT: 360415**

Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 22.6 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6184; ; Calibrated: 2013/1/21
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2013/1/28
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Ch512/H Scan - H3DV6: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.08000 A/m; Power Drift = -0.02 dB

PMF = 2.460 is applied.

H-field emissions = 0.1867 A/m

Near-field category: M3 (AWF -5 dB)

PMF scaled H-field


Grid 1 M3 0.244 A/m	Grid 2 M3 0.210 A/m	Grid 3 M3 0.162 A/m
Grid 4 M3 0.183 A/m	Grid 5 M3 0.185 A/m	Grid 6 M3 0.184 A/m
Grid 7 M3 0.164 A/m	Grid 8 M3 0.187 A/m	Grid 9 M3 0.186 A/m

Cursor:

Total = 0.2443 A/m

H Category: M3

Location: 25, -25, 8.7 mm

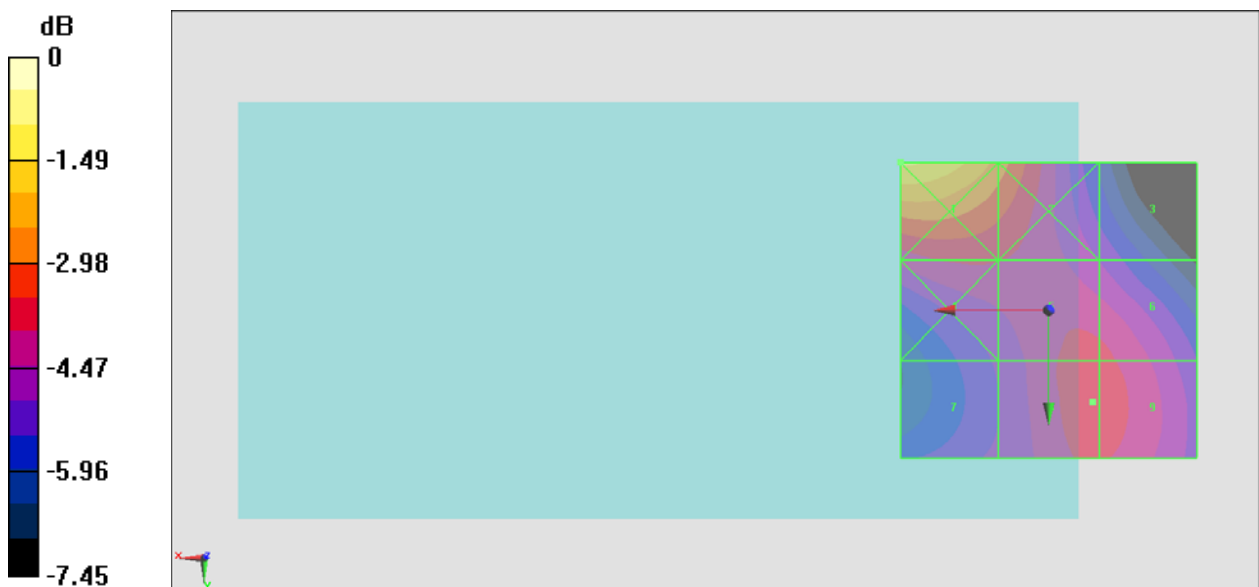

0 dB = 0.2861 A/m = -10.87 dBA/m

#29 HAC_H_GSM1900_GSM Voice_Ch661**DUT: 360415**

Communication System: PCS; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 22.6 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6184; ; Calibrated: 2013/1/21
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2013/1/28
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Ch661/H Scan - H3DV6: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.09400 A/m; Power Drift = 0.05 dB

PMF = 2.460 is applied.

H-field emissions = 0.2142 A/m

Near-field category: M3 (AWF -5 dB)

PMF scaled H-field



Grid 1 M2 0.265 A/m	Grid 2 M3 0.230 A/m	Grid 3 M3 0.185 A/m
Grid 4 M3 0.200 A/m	Grid 5 M3 0.213 A/m	Grid 6 M3 0.213 A/m
Grid 7 M3 0.183 A/m	Grid 8 M3 0.214 A/m	Grid 9 M3 0.214 A/m

Cursor:

Total = 0.2646 A/m

H Category: M2

Location: 25, -25, 8.7 mm

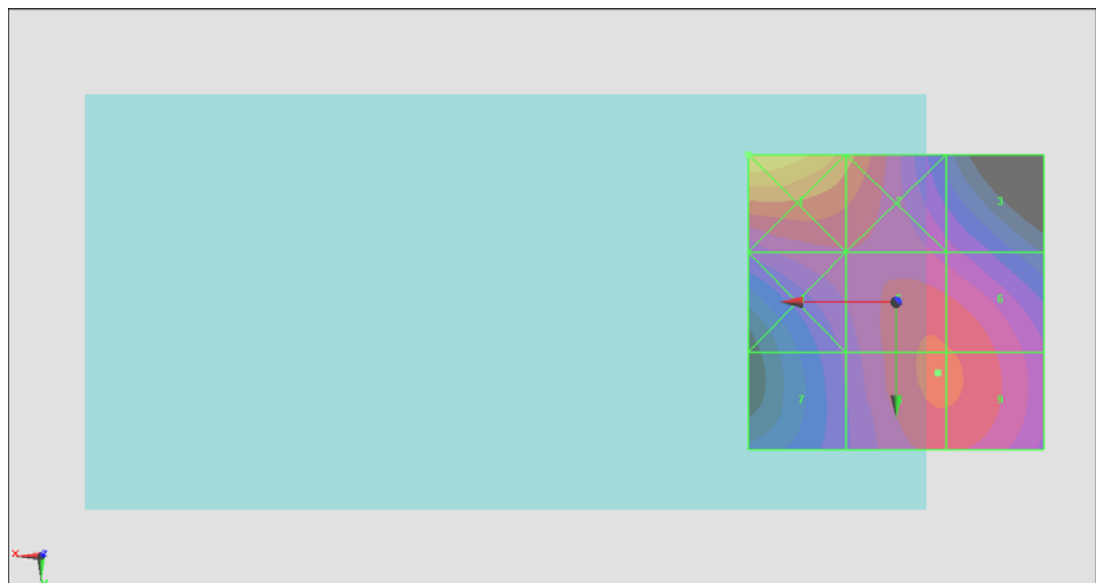

0 dB = 0.3098 A/m = -10.18 dBA/m

#30 HAC_H_GSM1900_GSM Voice_Ch810**DUT: 360415**

Communication System: PCS; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 22.6 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6184; ; Calibrated: 2013/1/21
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2013/1/28
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Ch810/H Scan - H3DV6: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.07700 A/m; Power Drift = 0.06 dB

PMF = 2.460 is applied.

H-field emissions = 0.1837 A/m

Near-field category: M3 (AWF -5 dB)

PMF scaled H-field


Grid 1 M3 0.248 A/m	Grid 2 M3 0.208 A/m	Grid 3 M3 0.157 A/m
Grid 4 M3 0.178 A/m	Grid 5 M3 0.182 A/m	Grid 6 M3 0.181 A/m
Grid 7 M3 0.166 A/m	Grid 8 M3 0.184 A/m	Grid 9 M3 0.183 A/m

Cursor:

Total = 0.2482 A/m

H Category: M3

Location: 25, -25, 8.7 mm

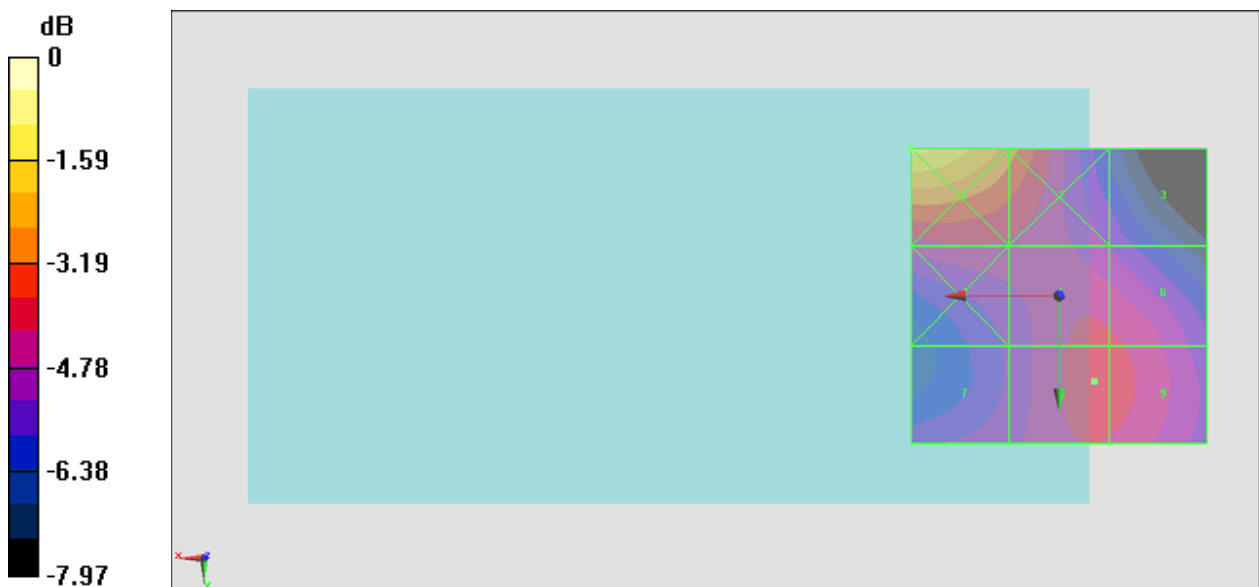

0 dB = 0.2906 A/m = -10.73 dBA/m

#19 HAC_H_WCDMA V_AMR 12.2Kbps_Ch4132**DUT: 360415**

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 22.6 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6184; ; Calibrated: 2013/1/21
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2013/1/28
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Ch4132/H Scan - H3DV6: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.04900 A/m; Power Drift = 0.02 dB

PMF = 0.83 is applied.

H-field emissions = 0.08106 A/m

Near-field category: M4 (AWF 0 dB)

PMF scaled H-field



Grid 1 M4 0.081 A/m	Grid 2 M4 0.059 A/m	Grid 3 M4 0.039 A/m
Grid 4 M4 0.072 A/m	Grid 5 M4 0.052 A/m	Grid 6 M4 0.034 A/m
Grid 7 M4 0.077 A/m	Grid 8 M4 0.055 A/m	Grid 9 M4 0.034 A/m

Cursor:

Total = 0.08106 A/m

H Category: M4

Location: 25, -25, 8.7 mm

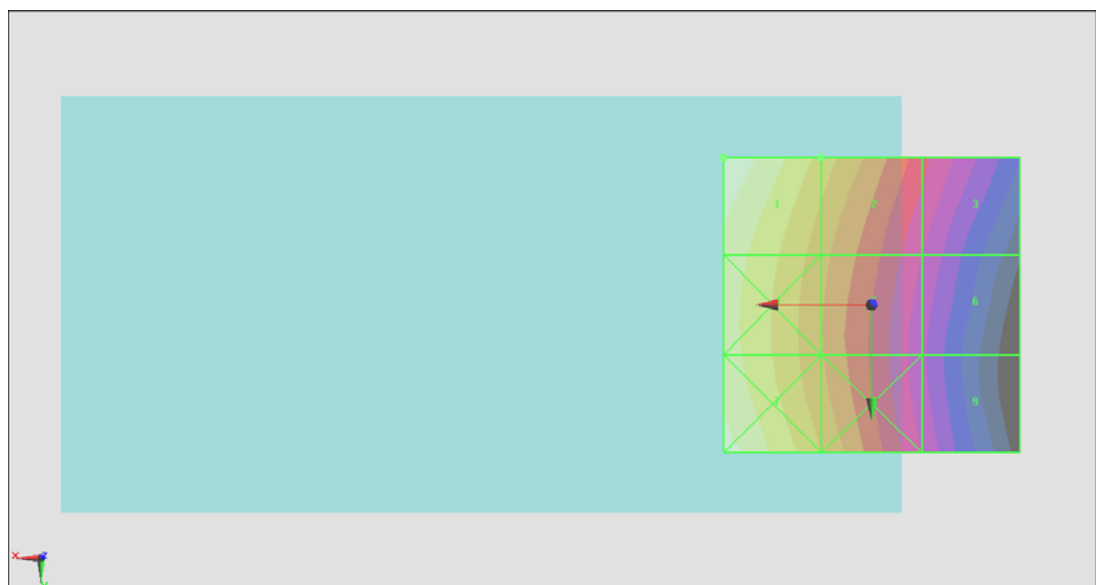

0 dB = 0.08106 A/m = -21.82 dBA/m

#20 HAC_H_WCDMA V_AMR 12.2Kbps_Ch4182**DUT: 360415**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 22.6 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6184; ; Calibrated: 2013/1/21
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2013/1/28
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Ch4182/H Scan - H3DV6: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.04900 A/m; Power Drift = -0.13 dB

PMF = 0.83 is applied.

H-field emissions = 0.08220 A/m

Near-field category: M4 (AWF 0 dB)

PMF scaled H-field


Grid 1 M4 0.082 A/m	Grid 2 M4 0.058 A/m	Grid 3 M4 0.036 A/m
Grid 4 M4 0.073 A/m	Grid 5 M4 0.052 A/m	Grid 6 M4 0.033 A/m
Grid 7 M4 0.076 A/m	Grid 8 M4 0.054 A/m	Grid 9 M4 0.033 A/m

Cursor:

Total = 0.08220 A/m

H Category: M4

Location: 25, -25, 8.7 mm



0 dB = 0.08220 A/m = -21.70 dBA/m

#21 HAC_H_WCDMA V_AMR 12.2Kbps_Ch4233**DUT: 360415**

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 22.6 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6184; ; Calibrated: 2013/1/21
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2013/1/28
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Ch4233/H Scan - H3DV6: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.05400 A/m; Power Drift = 0.14 dB

PMF = 0.83 is applied.

H-field emissions = 0.09005 A/m

Near-field category: M4 (AWF 0 dB)

PMF scaled H-field



Grid 1 M4 0.090 A/m	Grid 2 M4 0.066 A/m	Grid 3 M4 0.045 A/m
Grid 4 M4 0.078 A/m	Grid 5 M4 0.058 A/m	Grid 6 M4 0.038 A/m
Grid 7 M4 0.081 A/m	Grid 8 M4 0.058 A/m	Grid 9 M4 0.036 A/m

Cursor:

Total = 0.09005 A/m

H Category: M4

Location: 25, -25, 8.7 mm

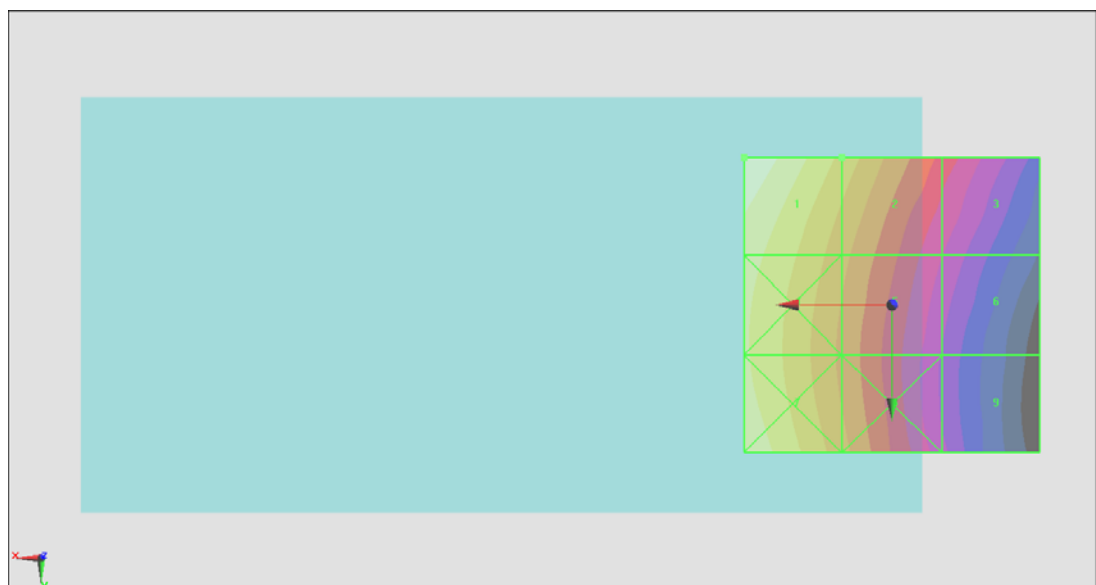

0 dB = 0.09005 A/m = -20.91 dBA/m

#22 HAC_H_WCDMA IV_AMR 12.2Kbps_Ch1312**DUT: 360415**

Communication System: WCDMA; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 22.6 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6184; ; Calibrated: 2013/1/21
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2013/1/28
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Ch1312/H Scan - H3DV6: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.08800 A/m; Power Drift = 0.02 dB

PMF = 0.89 is applied.

H-field emissions = 0.08584 A/m

Near-field category: M4 (AWF 0 dB)

PMF scaled H-field


Grid 1 M4 0.086 A/m	Grid 2 M4 0.074 A/m	Grid 3 M4 0.061 A/m
Grid 4 M4 0.074 A/m	Grid 5 M4 0.074 A/m	Grid 6 M4 0.071 A/m
Grid 7 M4 0.071 A/m	Grid 8 M4 0.074 A/m	Grid 9 M4 0.072 A/m

Cursor:

Total = 0.08584 A/m

H Category: M4

Location: 25, -25, 8.7 mm



0 dB = 0.08584 A/m = -21.33 dBA/m

#23 HAC_H_WCDMA IV_AMR 12.2Kbps_Ch1413**DUT: 360415**

Communication System: WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 22.6 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6184; ; Calibrated: 2013/1/21
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2013/1/28
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Ch1413/H Scan - H3DV6: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.07200 A/m; Power Drift = -0.05 dB

PMF = 0.89 is applied.

H-field emissions = 0.06244 A/m

Near-field category: M4 (AWF 0 dB)

PMF scaled H-field



Grid 1 M4 0.073 A/m	Grid 2 M4 0.062 A/m	Grid 3 M4 0.050 A/m
Grid 4 M4 0.059 A/m	Grid 5 M4 0.061 A/m	Grid 6 M4 0.060 A/m
Grid 7 M4 0.060 A/m	Grid 8 M4 0.062 A/m	Grid 9 M4 0.061 A/m

Cursor:

Total = 0.07348 A/m

H Category: M4

Location: 25, -25, 8.7 mm

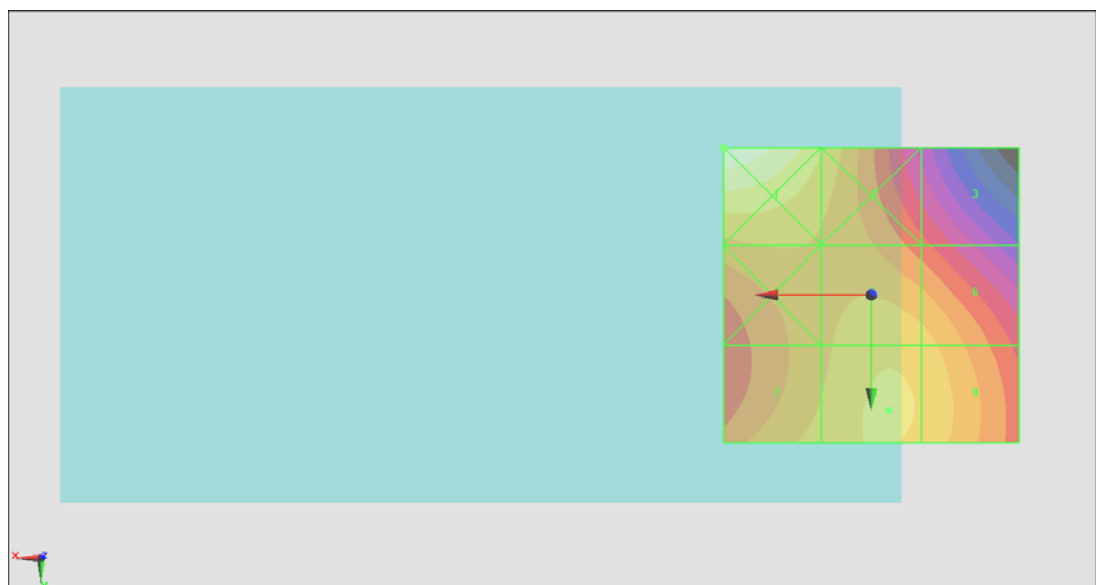

0 dB = 0.07348 A/m = -22.68 dBA/m

#24 HAC_H_WCDMA IV_AMR 12.2Kbps_Ch1513**DUT: 360415**

Communication System: WCDMA; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 22.6 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6184; ; Calibrated: 2013/1/21
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2013/1/28
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Ch1513/H Scan - H3DV6: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.08800 A/m; Power Drift = 0.06 dB

PMF = 0.89 is applied.

H-field emissions = 0.07286 A/m

Near-field category: M4 (AWF 0 dB)

PMF scaled H-field



Grid 1 M4 0.087 A/m	Grid 2 M4 0.075 A/m	Grid 3 M4 0.062 A/m
Grid 4 M4 0.072 A/m	Grid 5 M4 0.073 A/m	Grid 6 M4 0.070 A/m
Grid 7 M4 0.069 A/m	Grid 8 M4 0.073 A/m	Grid 9 M4 0.071 A/m

Cursor:

Total = 0.08701 A/m

H Category: M4

Location: 25, -25, 8.7 mm

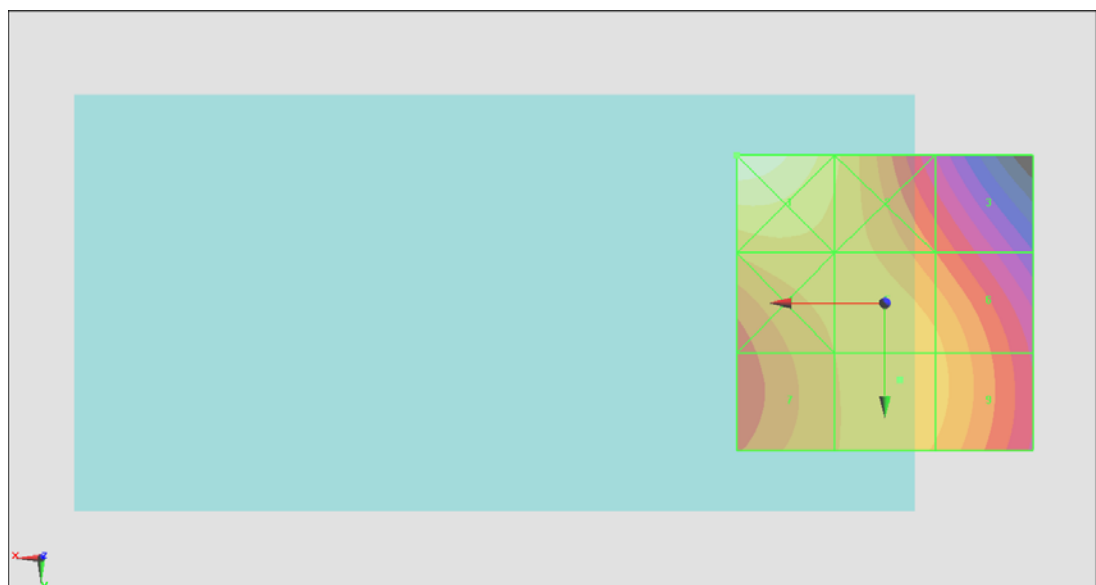

0 dB = 0.08701 A/m = -21.21 dBA/m

#25 HAC_H_WCDMA II_AMR 12.2Kbps_Ch9262**DUT: 360415**

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 22.6 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6184; ; Calibrated: 2013/1/21
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2013/1/28
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Ch9262/H Scan - H3DV6: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.08500 A/m; Power Drift = 0.12 dB

PMF = 0.89 is applied.

H-field emissions = 0.07346 A/m

Near-field category: M4 (AWF 0 dB)

PMF scaled H-field



Grid 1 M4 0.091 A/m	Grid 2 M4 0.081 A/m	Grid 3 M4 0.064 A/m
Grid 4 M4 0.071 A/m	Grid 5 M4 0.073 A/m	Grid 6 M4 0.073 A/m
Grid 7 M4 0.065 A/m	Grid 8 M4 0.073 A/m	Grid 9 M4 0.073 A/m

Cursor:

Total = 0.09114 A/m

H Category: M4

Location: 22.5, -25, 8.7 mm

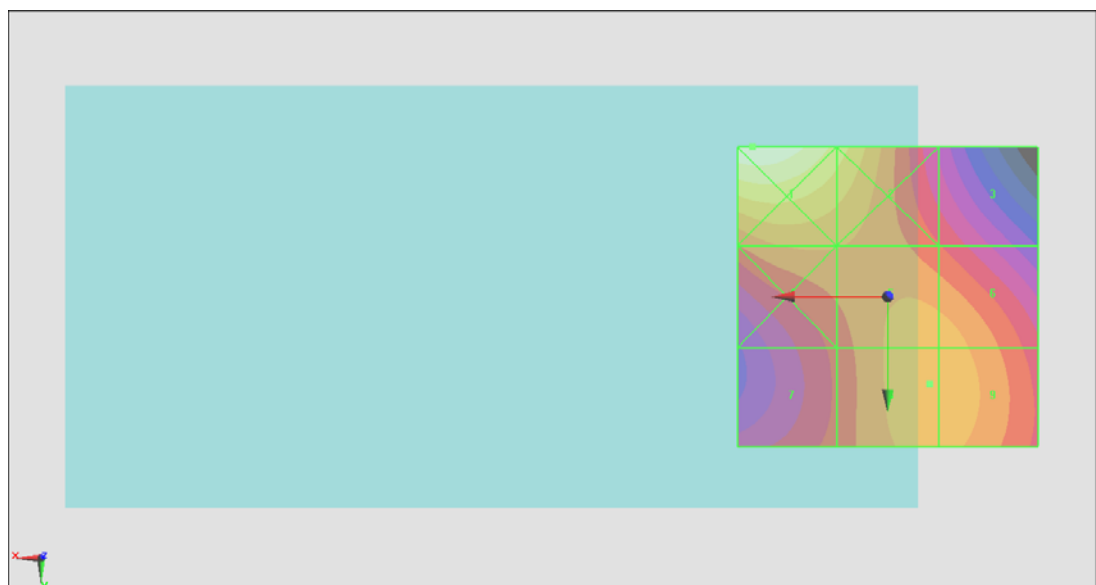

0 dB = 0.09114 A/m = -20.81 dBA/m

#26 HAC_H_WCDMA II_AMR 12.2Kbps_Ch9400**DUT: 360415**

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 22.6 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6184; ; Calibrated: 2013/1/21
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2013/1/28
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Ch512/H Scan - H3DV6: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.1000 A/m; Power Drift = -0.07 dB

PMF = 0.89 is applied.

H-field emissions = 0.08392 A/m

Near-field category: M4 (AWF 0 dB)

PMF scaled H-field


Grid 1 M4 0.100 A/m	Grid 2 M4 0.088 A/m	Grid 3 M4 0.073 A/m
Grid 4 M4 0.077 A/m	Grid 5 M4 0.084 A/m	Grid 6 M4 0.083 A/m
Grid 7 M4 0.071 A/m	Grid 8 M4 0.084 A/m	Grid 9 M4 0.084 A/m

Cursor:

Total = 0.1001 A/m

H Category: M4

Location: 25, -25, 8.7 mm

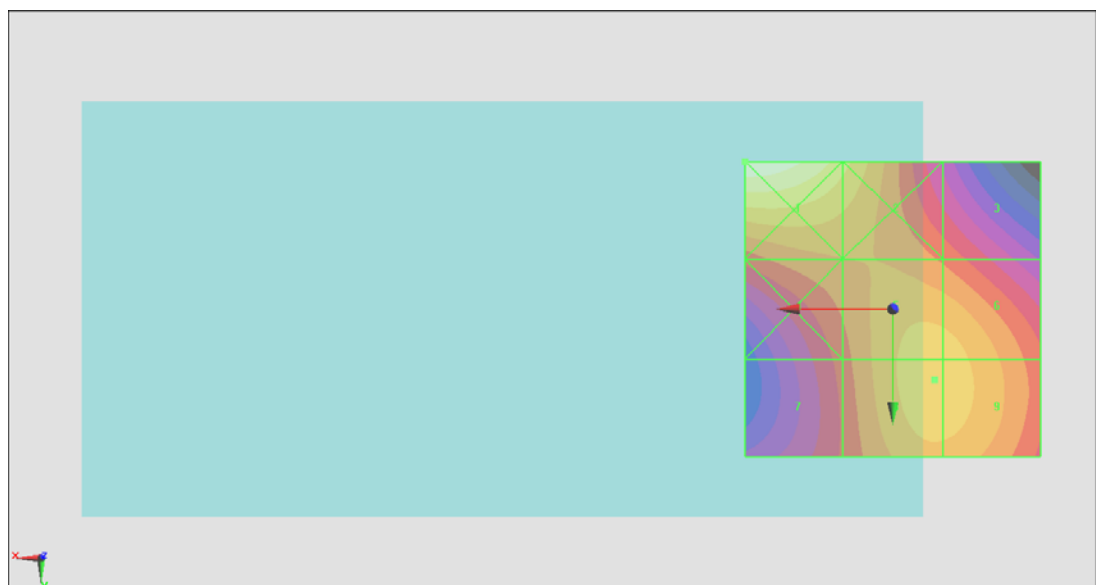

0 dB = 0.1001 A/m = -19.99 dBA/m

#27 HAC_H_WCDMA II_AMR 12.2Kbps_Ch9538**DUT: 360415**

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 22.6 °C

DASY5 Configuration:

- Probe: H3DV6 - SN6184; ; Calibrated: 2013/1/21
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2013/1/28
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (6); SEMCAD X Version 14.6.9 (7117)

Ch9538/H Scan - H3DV6: 15 mm from Probe Center to the Device/Hearing Aid**Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.08800 A/m; Power Drift = -0.10 dB

PMF = 0.89 is applied.

H-field emissions = 0.07715 A/m

Near-field category: M4 (AWF 0 dB)

PMF scaled H-field



Grid 1 M4 0.097 A/m	Grid 2 M4 0.082 A/m	Grid 3 M4 0.064 A/m
Grid 4 M4 0.071 A/m	Grid 5 M4 0.076 A/m	Grid 6 M4 0.076 A/m
Grid 7 M4 0.068 A/m	Grid 8 M4 0.077 A/m	Grid 9 M4 0.077 A/m

Cursor:

Total = 0.09712 A/m

H Category: M4

Location: 25, -25, 8.7 mm

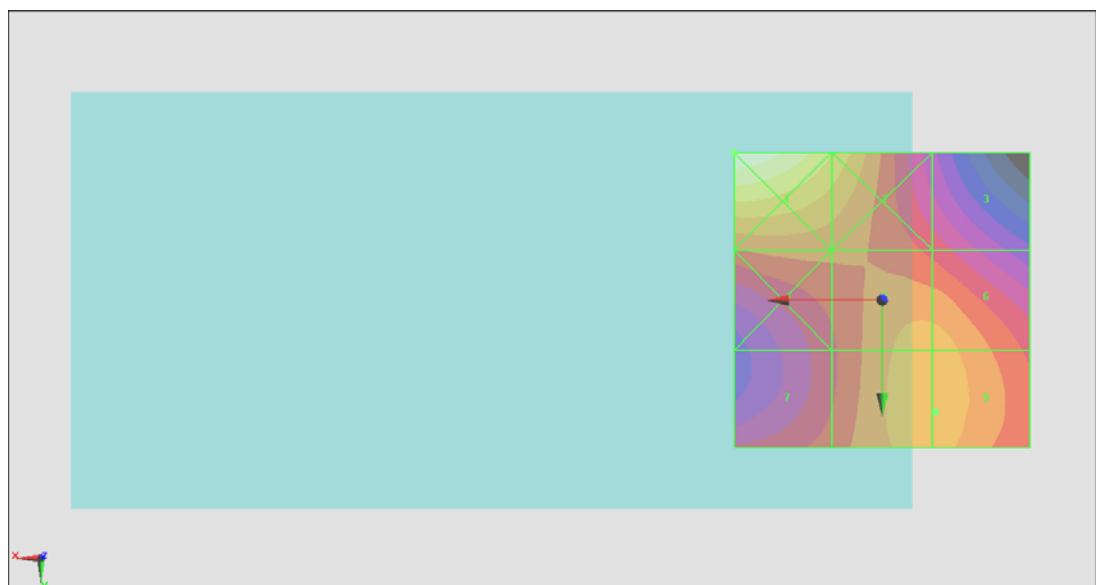

0 dB = 0.09712 A/m = -20.25 dBA/m