

# FCC RF Test Report

APPLICANT : VERTU Corporation Limited  
EQUIPMENT : Cellular Telephone  
BRAND NAME : VERTU  
MODEL NAME : SIGNATURE TOUCH  
TYPE (LTE) : RM-980V  
TYPE (WCDMA) : RM-980C  
FCC ID : P7QRM-980V  
STANDARD : FCC Part 15 Subpart C §15.247  
CLASSIFICATION : (DTS) Digital Transmission System


The product was received on Mar. 03, 2014 and testing was completed on May 21, 2014. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown to be compliant with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



---

Reviewed by: Joseph Lin / Supervisor



---

Approved by: Jones Tsai / Manager



**SPORTON INTERNATIONAL INC.**

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



## TABLE OF CONTENTS

|                                                                  |     |
|------------------------------------------------------------------|-----|
| REVISION HISTORY .....                                           | 3   |
| SUMMARY OF TEST RESULT .....                                     | 4   |
| 1 GENERAL DESCRIPTION .....                                      | 5   |
| 1.1 Applicant .....                                              | 5   |
| 1.2 Manufacturer .....                                           | 5   |
| 1.3 Feature of Equipment Under Test .....                        | 5   |
| 1.4 Product Specification of Equipment Under Test .....          | 7   |
| 1.5 Modification of EUT .....                                    | 8   |
| 1.6 Testing Site .....                                           | 8   |
| 1.7 Applied Standards .....                                      | 8   |
| 2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....               | 9   |
| 2.1 Carrier Frequency Channel .....                              | 9   |
| 2.2 Pre-Scanned RF Power .....                                   | 10  |
| 2.3 Test Mode .....                                              | 12  |
| 2.4 Connection Diagram of Test System .....                      | 15  |
| 2.5 Support Unit used in test configuration and system .....     | 17  |
| 2.6 EUT Operation Test Setup .....                               | 18  |
| 2.7 Measurement Results Explanation Example .....                | 18  |
| 3 TEST RESULT .....                                              | 19  |
| 3.1 6dB and 99% Bandwidth Measurement .....                      | 19  |
| 3.2 Output Power Measurement .....                               | 22  |
| 3.3 Power Spectral Density Measurement .....                     | 27  |
| 3.4 Conducted Band Edges and Spurious Emission Measurement ..... | 30  |
| 3.5 Radiated Band Edges and Spurious Emission Measurement .....  | 54  |
| 3.6 AC Conducted Emission Measurement .....                      | 95  |
| 3.7 Antenna Requirements .....                                   | 99  |
| 4 LIST OF MEASURING EQUIPMENT .....                              | 100 |
| 5 UNCERTAINTY OF EVALUATION .....                                | 102 |
| APPENDIX A. SETUP PHOTOGRAPHS                                    |     |



## REVISION HISTORY

| REPORT NO. | VERSION | DESCRIPTION             | ISSUED DATE  |
|------------|---------|-------------------------|--------------|
| FR430314C  | Rev. 01 | Initial issue of report | May 26, 2014 |
|            |         |                         |              |
|            |         |                         |              |
|            |         |                         |              |
|            |         |                         |              |
|            |         |                         |              |
|            |         |                         |              |
|            |         |                         |              |
|            |         |                         |              |
|            |         |                         |              |
|            |         |                         |              |
|            |         |                         |              |
|            |         |                         |              |
|            |         |                         |              |
|            |         |                         |              |

## SUMMARY OF TEST RESULT

| Report Section | FCC Rule              | IC Rule            | Description                                           | Limit                          | Result | Remark                                    |
|----------------|-----------------------|--------------------|-------------------------------------------------------|--------------------------------|--------|-------------------------------------------|
| 3.1            | 15.247(a)(2)          | RSS-210<br>A8.2(a) | 6dB Bandwidth                                         | $\geq 0.5\text{MHz}$           | Pass   | -                                         |
| 3.1            | -                     | RSS-Gen<br>4.6.1   | 99% Bandwidth                                         | -                              | Pass   | -                                         |
| 3.2            | 15.247(b)             | RSS-210<br>A8.4    | Power Output Measurement                              | $\leq 30\text{dBm}$            | Pass   | -                                         |
| 3.3            | 15.247(e)             | RSS-210<br>A8.2(b) | Power Spectral Density                                | $\leq 8\text{dBm}/3\text{kHz}$ | Pass   | -                                         |
| 3.4            | 15.247(d)             | RSS-210<br>A8.5    | Conducted Band Edges                                  | $\leq 20\text{dBc}$            | Pass   | -                                         |
|                |                       |                    | Conducted Spurious Emission                           |                                | Pass   | -                                         |
| 3.5            | 15.247(d)             | RSS-210<br>A8.5    | Radiated Band Edges and<br>Radiated Spurious Emission | 15.209(a) &<br>15.247(d)       | Pass   | Under limit<br>9.16 dB at<br>2483.830 MHz |
| 3.6            | 15.207                | RSS-Gen<br>7.2.4   | AC Conducted Emission                                 | 15.207(a)                      | Pass   | Under limit<br>9.10 dB at<br>0.150 MHz    |
| 3.7            | 15.203 &<br>15.247(b) | RSS-210<br>A8.4    | Antenna Requirement                                   | N/A                            | Pass   | -                                         |



# 1 General Description

## 1.1 Applicant

**VERTU Corporation Limited**

Beacon Hill Road, Church Crookham, Hampshire GU52 8DY, United Kingdom

## 1.2 Manufacturer

**VERTU Corporation Limited**

Beacon Hill Road, Church Crookham, Hampshire GU52 8DY, United Kingdom

## 1.3 Feature of Equipment Under Test

| Product Feature                 |                                                                                                                                                                                    |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Equipment                       | Cellular Telephone                                                                                                                                                                 |
| Brand Name                      | VERTU                                                                                                                                                                              |
| Model Name                      | SIGNATURE TOUCH                                                                                                                                                                    |
| Type (LTE)                      | RM-980V                                                                                                                                                                            |
| Type (WCDMA)                    | RM-980C                                                                                                                                                                            |
| FCC ID                          | P7QRM-980V                                                                                                                                                                         |
| EUT supports Radios application | GSM/EGPRS/WCDMA/HSPA/LTE/NFC<br>WLAN 2.4GHz 802.11b/g/n HT20/<br>WLAN 5GHz 802.11a/n HT20/HT40/<br>WLAN 5GHz 802.11ac VHT20/VHT40/VHT80/<br>Bluetooth v3.0 + EDR/Bluetooth v4.0 LE |
| HW Version                      | F2                                                                                                                                                                                 |
| SW Version                      | 1_160_0001                                                                                                                                                                         |
| Sample #1                       | LTE SKU                                                                                                                                                                            |
| Sample #2                       | WCDMA SKU                                                                                                                                                                          |
| Sample #3                       | LTE SKU with 2 <sup>nd</sup> EMMC                                                                                                                                                  |
| EUT Stage                       | Identical Prototype                                                                                                                                                                |

### Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are three different types of EUT sample #1, sample #2 and sample #3. For WWAN bands, Sample 1 support WCDMA and LTE bands, sample #2 only support WCDMA band and LTE band is disabled by software. Sample #1 and Sample #3 are different for EMMC. We choose sample #1 to perform all tests.

**List of Accessory:**

| Specification of Accessory |            |          |
|----------------------------|------------|----------|
| AC Adapter                 | Brand Name | VERTU    |
|                            | Model Name | AC-32V   |
| Battery                    | Brand Name | VERTU    |
|                            | Model Name | BP-9V    |
| Car Charger                | Brand Name | VERTU    |
|                            | Model Name | DC-30V   |
| Portable Power<br>Charger  | Brand Name | VERTU    |
|                            | Model Name | DC-15V   |
| Earphone 1                 | Brand Name | VERTU    |
|                            | Model Name | WH-4V    |
| Earphone 2                 | Brand Name | VERTU    |
|                            | Model Name | WH-5V    |
| USB Cable                  | Brand Name | VERTU    |
|                            | Model Name | CA-225DV |
| Wireless<br>Charger        | Brand Name | VERTU    |
|                            | Model Name | AC-35V   |

## 1.4 Product Specification of Equipment Under Test

| Product Specification subjective to this standard |                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Tx/Rx Channel Frequency Range</b>              | 802.11b/g/n: 2412 MHz ~ 2462 MHz<br>802.11a/n/ac: 5745~5825MHz.                                                                                                                                                                                                                                                                                                                                                                |
| <b>Maximum (Peak) Output Power to Antenna</b>     | <b>&lt;2412 MHz ~ 2462 MHz&gt;</b><br>802.11b : 19.23 dBm (0.0838 W)<br>802.11g : 21.89 dBm (0.1545 W)<br>802.11n HT20 : 19.64 dBm (0.0920 W)<br><b>&lt;5745 MHz ~ 5825 MHz&gt;</b><br>802.11a : 20.81 dBm (0.1205 W)<br>802.11n HT20 : 19.44 dBm (0.0879 W)<br>802.11n HT40 : 19.03 dBm (0.0800 W)<br>802.11ac VHT20 : 17.41 dBm (0.0551 W)<br>802.11ac VHT40 : 17.02 dBm (0.0504 W)<br>802.11ac VHT80 : 16.60 dBm (0.0457 W) |
| <b>99% Occupied Bandwidth</b>                     | <b>&lt;2412 MHz ~ 2462 MHz&gt;</b><br>802.11b : 13.95MHz<br>802.11g : 18.55MHz<br>802.11n HT20 : 19.00MHz<br><b>&lt;5745 MHz ~ 5825 MHz&gt;</b><br>802.11a : 19.40MHz<br>802.11n HT20 : 19.60MHz<br>802.11n HT40 : 37.70MHz<br>802.11ac VHT20 : 19.25 MHz<br>802.11ac VHT40 : 37.00 MHz<br>802.11ac VHT80 : 75.12 MHz                                                                                                          |
| <b>Antenna Type</b>                               | 802.11b/g/n : PIFA Antenna with gain -2.00 dBi<br>802.11a/n/ac : PIFA Antenna with gain 0.80 dBi                                                                                                                                                                                                                                                                                                                               |
| <b>Type of Modulation</b>                         | 802.11b : DSSS (DBPSK / DQPSK / CCK)<br>802.11a/g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)<br>802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)                                                                                                                                                                                                                                                                              |

## 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

## 1.6 Testing Site

|                    |                                                                                                                                                              |         |                        |                         |
|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|------------------------|-------------------------|
| Test Site          | SPORTON INTERNATIONAL INC.                                                                                                                                   |         |                        |                         |
| Test Site Location | No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park,<br>Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.<br>TEL: +886-3-3273456 / FAX: +886-3-3284978 |         |                        |                         |
| Test Site No.      | Sporton Site No.                                                                                                                                             |         |                        | FCC/IC Registration No. |
|                    | TH02-HY                                                                                                                                                      | CO05-HY | 03CH06-HY<br>03CH07-HY | 722060/4086B-1          |

**Note:** The test site complies with ANSI C63.4 2003 requirement.

## 1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01
- ♦ ANSI C63.4-2003
- ♦ IC RSS-210 Issued 8
- ♦ IC RSS-Gen Issue 3
- ♦ NOTICE 2012-DRS0126

### Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

## 2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane for 2.4GHz, Z plane for 5GHz) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

### 2.1 Carrier Frequency Channel

| Frequency Band  | Channel | Freq. (MHz) | Channel | Freq. (MHz) |
|-----------------|---------|-------------|---------|-------------|
| 2400-2483.5 MHz | 1       | 2412        | 7       | 2442        |
|                 | 2       | 2417        | 8       | 2447        |
|                 | 3       | 2422        | 9       | 2452        |
|                 | 4       | 2427        | 10      | 2457        |
|                 | 5       | 2432        | 11      | 2462        |
|                 | 6       | 2437        | -       | -           |

| Frequency Band          | Channel | Freq. (MHz) | Channel | Freq. (MHz) |
|-------------------------|---------|-------------|---------|-------------|
| 5725-5850 MHz<br>Band 4 | 149     | 5745        | 159     | 5795        |
|                         | 151     | 5755        | 161     | 5805        |
|                         | 153     | 5765        | 165     | 5825        |
|                         | 157     | 5785        | -       | -           |

## 2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test shown in the following tables.

| WLAN 2.4GHz 802.11b Average Power (dBm) |                 |                     |                     |        |          |         |
|-----------------------------------------|-----------------|---------------------|---------------------|--------|----------|---------|
| Power vs. Channel                       |                 |                     | Power vs. Data Rate |        |          |         |
| Channel                                 | Frequency (MHz) | Data Rate<br>1M bps | Channel             | 2M bps | 5.5M bps | 11M bps |
| CH 01                                   | 2412            | 19.23               | CH 01               | 19.20  | 19.12    | 19.11   |
| CH 06                                   | 2437            | 19.02               |                     |        |          |         |
| CH 11                                   | 2462            | 19.01               |                     |        |          |         |

| WLAN 2.4GHz 802.11g Average Power (dBm) |                 |           |                     |       |        |        |        |        |        |        |
|-----------------------------------------|-----------------|-----------|---------------------|-------|--------|--------|--------|--------|--------|--------|
| Power vs. Channel                       |                 |           | Power vs. Data Rate |       |        |        |        |        |        |        |
| Channel                                 | Frequency (MHz) | Data Rate | Channel             | 9Mbps | 12Mbps | 18Mbps | 24Mbps | 36Mbps | 48Mbps | 54Mbps |
|                                         |                 | 6Mbps     |                     |       |        |        |        |        |        |        |
| CH 01                                   | 2412            | 21.42     | CH 11               | 21.64 | 21.69  | 21.82  | 21.73  | 21.75  | 21.69  | 21.75  |
| CH 06                                   | 2437            | 21.82     |                     |       |        |        |        |        |        |        |
| CH 11                                   | 2462            | 21.89     |                     |       |        |        |        |        |        |        |

| WLAN 2.4GHz 802.11n HT20 Average Power (dBm) |                 |           |                     |       |       |       |       |       |       |       |
|----------------------------------------------|-----------------|-----------|---------------------|-------|-------|-------|-------|-------|-------|-------|
| Power vs. Channel                            |                 |           | Power vs. Data Rate |       |       |       |       |       |       |       |
| Channel                                      | Frequency (MHz) | Data Rate | Channel             | MCS1  | MCS2  | MCS3  | MCS4  | MCS5  | MCS6  | MCS7  |
|                                              |                 | MCS0      |                     |       |       |       |       |       |       |       |
| CH 01                                        | 2412            | 19.19     | CH 11               | 19.37 | 19.38 | 19.43 | 19.32 | 19.36 | 19.21 | 19.22 |
| CH 06                                        | 2437            | 19.21     |                     |       |       |       |       |       |       |       |
| CH 11                                        | 2462            | 19.64     |                     |       |       |       |       |       |       |       |

| WLAN 5GHz 802.11a Average Power (dBm) |                 |                    |                     |       |        |        |        |        |        |        |
|---------------------------------------|-----------------|--------------------|---------------------|-------|--------|--------|--------|--------|--------|--------|
| Power vs. Channel                     |                 |                    | Power vs. Data Rate |       |        |        |        |        |        |        |
| Channel                               | Frequency (MHz) | Data Rate<br>6Mbps | Channel             | 9Mbps | 12Mbps | 18Mbps | 24Mbps | 36Mbps | 48Mbps | 54Mbps |
| CH 149                                | 5745            | <b>20.81</b>       | CH 149              | 20.66 | 20.76  | 20.74  | 20.75  | 20.77  | 20.75  | 20.71  |
| CH 157                                | 5785            | 20.34              |                     |       |        |        |        |        |        |        |
| CH 165                                | 5825            | 20.51              |                     |       |        |        |        |        |        |        |

| WLAN 5GHz 802.11n-HT20 Average Power (dBm) |                 |                   |                     |       |       |       |       |       |       |       |
|--------------------------------------------|-----------------|-------------------|---------------------|-------|-------|-------|-------|-------|-------|-------|
| Power vs. Channel                          |                 |                   | Power vs. Data Rate |       |       |       |       |       |       |       |
| Channel                                    | Frequency (MHz) | Data Rate<br>MCS0 | Channel             | MCS1  | MCS2  | MCS3  | MCS4  | MCS5  | MCS6  | MCS7  |
| CH 149                                     | 5745            | <b>19.44</b>      | CH 149              | 19.35 | 19.41 | 19.39 | 19.34 | 19.37 | 19.43 | 19.35 |
| CH 157                                     | 5785            | 19.36             |                     |       |       |       |       |       |       |       |
| CH 165                                     | 5825            | 19.33             |                     |       |       |       |       |       |       |       |

| WLAN 5GHz 802.11n-HT40 Average Power (dBm) |                 |                   |                     |       |       |       |       |       |       |       |
|--------------------------------------------|-----------------|-------------------|---------------------|-------|-------|-------|-------|-------|-------|-------|
| Power vs. Channel                          |                 |                   | Power vs. Data Rate |       |       |       |       |       |       |       |
| Channel                                    | Frequency (MHz) | Data Rate<br>MCS0 | Channel             | MCS1  | MCS2  | MCS3  | MCS4  | MCS5  | MCS6  | MCS7  |
| CH 151                                     | 5755            | <b>19.03</b>      | CH 151              | 18.09 | 18.13 | 18.11 | 18.14 | 18.24 | 18.03 | 18.26 |
| CH 159                                     | 5795            | 18.79             |                     |       |       |       |       |       |       |       |

| WLAN 5GHz 802.11ac VHT20 RF Power (dBm) |                 |                   |                     |       |       |       |       |       |       |       |       |
|-----------------------------------------|-----------------|-------------------|---------------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Power vs. Channel                       |                 |                   | Power vs. Data Rate |       |       |       |       |       |       |       |       |
| Channel                                 | Frequency (MHz) | Data Rate<br>MCS0 | Channel             | MCS1  | MCS2  | MCS3  | MCS4  | MCS5  | MCS6  | MCS7  | MCS8  |
| CH 149                                  | 5745            | 16.86             | CH 165              | 17.23 | 16.69 | 16.91 | 17.34 | 17.18 | 17.05 | 16.77 | 17.09 |
| CH 157                                  | 5785            | 17.05             |                     |       |       |       |       |       |       |       |       |
| CH 165                                  | 5825            | <b>17.41</b>      |                     |       |       |       |       |       |       |       |       |

| WLAN 5GHz 802.11ac VHT40 RF Power (dBm) |                 |                   |                     |       |       |       |       |       |       |       |       |       |
|-----------------------------------------|-----------------|-------------------|---------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Power vs. Channel                       |                 |                   | Power vs. Data Rate |       |       |       |       |       |       |       |       |       |
| Channel                                 | Frequency (MHz) | Data Rate<br>MCS0 | Channel             | MCS1  | MCS2  | MCS3  | MCS4  | MCS5  | MCS6  | MCS7  | MCS8  | MCS9  |
| CH 151                                  | 5755            | <b>17.02</b>      | CH 151              | 17.01 | 17.00 | 16.99 | 17.01 | 16.97 | 15.89 | 15.52 | 15.61 | 15.84 |
| CH 159                                  | 5795            | 16.45             |                     |       |       |       |       |       |       |       |       |       |

| WLAN 5GHz 802.11ac VHT80 RF Power (dBm) |                 |              |                     |       |       |       |       |       |       |       |       |
|-----------------------------------------|-----------------|--------------|---------------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Power vs. Channel                       |                 |              | Power vs. Data Rate |       |       |       |       |       |       |       |       |
| Channel                                 | Frequency (MHz) | MCS0         | MCS1                | MCS2  | MCS3  | MCS4  | MCS5  | MCS6  | MCS7  | MCS8  | MCS9  |
| CH 155                                  | 5775            | <b>16.60</b> | 16.05               | 16.12 | 16.18 | 16.14 | 16.12 | 15.76 | 15.95 | 16.10 | 15.98 |

## 2.3 Test Mode

Final results of test modes, data rates and test channels are shown as following table.

<WLAN 2.4GHz>

| Test Cases       |                                          |              |           |              |
|------------------|------------------------------------------|--------------|-----------|--------------|
| Conducted<br>TCs | Test Items                               | Mode         | Data Rate | Test Channel |
|                  | 6dB and 99% BW<br>Power Spectral Density | 802.11b      | 1 Mbps    | 1/6/11       |
|                  |                                          | 802.11g      | 6 Mbps    | 1/6/11       |
|                  |                                          | 802.11n HT20 | MCS0      | 1/6/11       |
|                  | Output Power                             | 802.11b      | 1 Mbps    | 1/6/11       |
|                  |                                          | 802.11g      | 6 Mbps    | 1/6/11       |
|                  |                                          | 802.11n HT20 | MCS0      | 1/6/11       |
|                  | Conducted Band Edge                      | 802.11b      | 1 Mbps    | 1/11         |
|                  |                                          | 802.11g      | 6 Mbps    | 1/11         |
|                  |                                          | 802.11n HT20 | MCS0      | 1/11         |
|                  | Conducted Spurious<br>Emission           | 802.11b      | 1 Mbps    | 1/6/11       |
|                  |                                          | 802.11g      | 6 Mbps    | 1/6/11       |
|                  |                                          | 802.11n HT20 | MCS0      | 1/6/11       |
| Radiated<br>TCs  | Radiated Band Edge                       | 802.11b      | 1 Mbps    | 1/11         |
|                  |                                          | 802.11g      | 6 Mbps    | 1/11         |
|                  |                                          | 802.11n HT20 | MCS0      | 1/11         |
|                  | Radiated Spurious<br>Emission            | 802.11b      | 1 Mbps    | 1/6/11       |
|                  |                                          | 802.11g      | 6 Mbps    | 1/6/11       |
|                  |                                          | 802.11n HT20 | MCS0      | 1/6/11       |

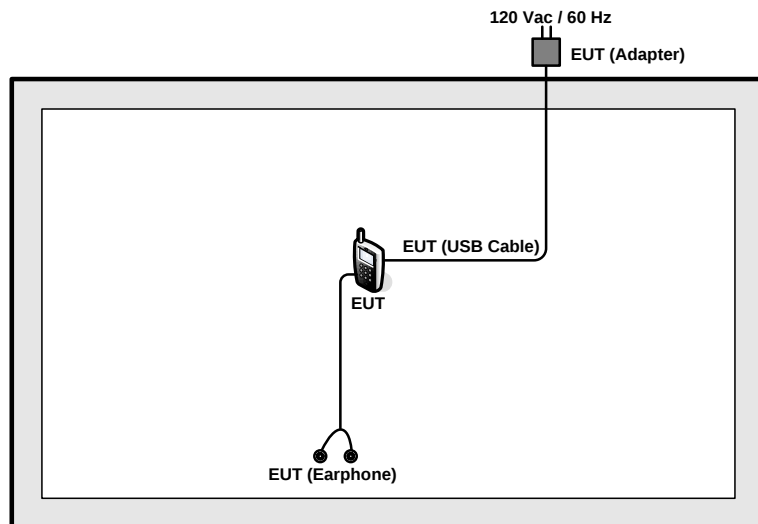
**<WLAN 5GHz>**

| Test Cases       |                                          |                |           |              |
|------------------|------------------------------------------|----------------|-----------|--------------|
| Conducted<br>TCs | Test Items                               | Mode           | Data Rate | Test Channel |
|                  | 6dB and 99% BW<br>Power Spectral Density | 802.11a        | 6 Mbps    | 149/157/165  |
|                  |                                          | 802.11n HT20   | MCS0      | 149/157/165  |
|                  |                                          | 802.11n HT40   | MCS0      | 151/159      |
|                  |                                          | 802.11ac VHT20 | MCS0      | 149/157/165  |
|                  |                                          | 802.11ac VHT40 | MCS0      | 151/159      |
|                  |                                          | 802.11ac VHT80 | MCS0      | 155          |
|                  | Output Power                             | 802.11a        | 6 Mbps    | 149/157/165  |
|                  |                                          | 802.11n HT20   | MCS0      | 149/157/165  |
|                  |                                          | 802.11n HT40   | MCS0      | 151/159      |
|                  |                                          | 802.11ac VHT20 | MCS0      | 149/157/165  |
|                  |                                          | 802.11ac VHT40 | MCS0      | 151/159      |
|                  |                                          | 802.11ac VHT80 | MCS0      | 155          |
|                  | Conducted Band Edge                      | 802.11a        | 6 Mbps    | 149/165      |
|                  |                                          | 802.11n HT20   | MCS0      | 149/165      |
|                  |                                          | 802.11n HT40   | MCS0      | 151/159      |
|                  |                                          | 802.11ac VHT20 | MCS0      | 149/165      |
|                  |                                          | 802.11ac VHT40 | MCS0      | 151/159      |
|                  |                                          | 802.11ac VHT80 | MCS0      | -            |
| Conducted<br>TCs | Conducted Spurious<br>Emission           | 802.11a        | 6 Mbps    | 149/157/165  |
|                  |                                          | 802.11n HT20   | MCS0      | 149/157/165  |
|                  |                                          | 802.11n HT40   | MCS0      | 151/159      |
|                  |                                          | 802.11ac VHT20 | MCS0      | 149/157/165  |
|                  |                                          | 802.11ac VHT40 | MCS0      | 151/159      |
|                  |                                          | 802.11ac VHT80 | MCS0      | 155          |

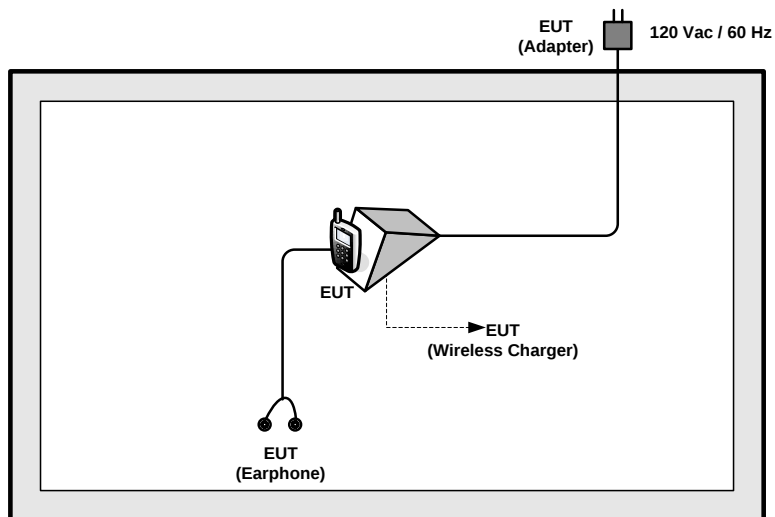
| Test Cases                                                                                    |                                                                                                                                             |                |        |             |
|-----------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|----------------|--------|-------------|
| Radiated<br>TCs                                                                               | Radiated Band Edge                                                                                                                          | 802.11a        | 6 Mbps | -           |
|                                                                                               |                                                                                                                                             | 802.11n HT20   | MCS0   | -           |
|                                                                                               |                                                                                                                                             | 802.11n HT40   | MCS0   | -           |
|                                                                                               |                                                                                                                                             | 802.11ac VHT20 | MCS0   | -           |
|                                                                                               |                                                                                                                                             | 802.11ac VHT40 | MCS0   | -           |
|                                                                                               |                                                                                                                                             | 802.11ac VHT80 | MCS0   | -           |
|                                                                                               | Radiated Spurious<br>Emission                                                                                                               | 802.11a        | 6 Mbps | 149/157/165 |
|                                                                                               |                                                                                                                                             | 802.11n HT20   | MCS0   | 149/157/165 |
|                                                                                               |                                                                                                                                             | 802.11n HT40   | MCS0   | 151/159     |
|                                                                                               |                                                                                                                                             | 802.11ac VHT20 | MCS0   | -           |
|                                                                                               |                                                                                                                                             | 802.11ac VHT40 | MCS0   | -           |
|                                                                                               |                                                                                                                                             | 802.11ac VHT80 | MCS0   | 155         |
| AC<br>Conducted<br>Emission                                                                   | Mode 1 : LTE Band 2 Idle + WLAN 2.4GHz Link + Bluetooth Link + NFC Tx + Earphone 1 + USB Cable (Data Link with Notebook)                    |                |        |             |
|                                                                                               | Mode 2 : LTE Band 2 Idle + WLAN 5GHz Link + Bluetooth Link + NFC Tx + Earphone 1 + USB Cable (Data Link with Notebook)                      |                |        |             |
|                                                                                               | Mode 3 : GSM1900 Idle + WLAN (2.4GHz) Link + Bluetooth Link + WPC Charging + GPS Rx + Earphone 2 + Wireless charger (Charging from Adapter) |                |        |             |
| Remark: The worst case of conducted emission is mode 1; only the test data of it is reported. |                                                                                                                                             |                |        |             |

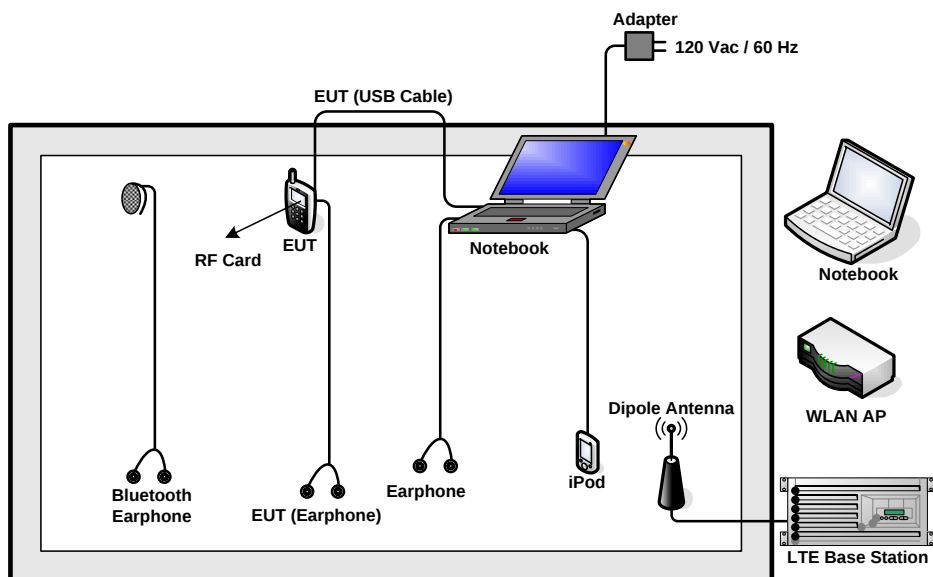
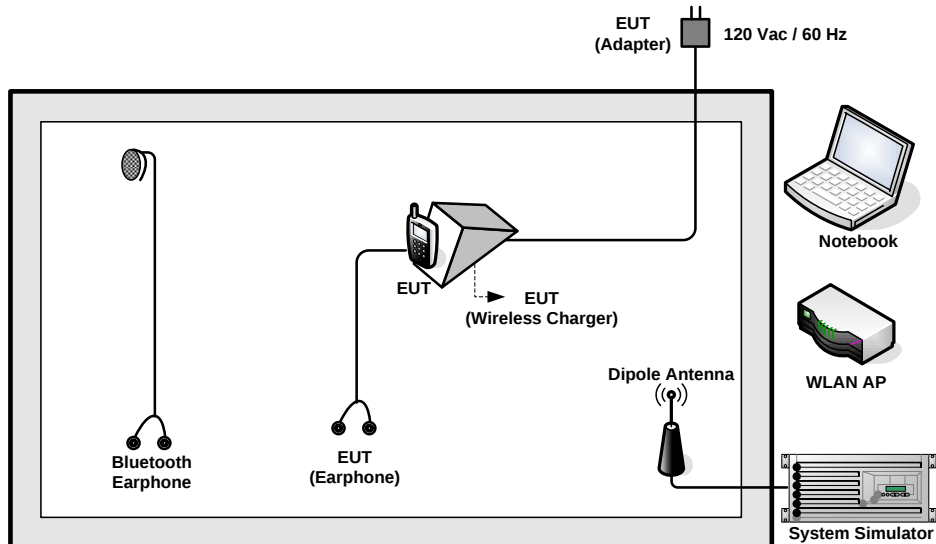
## 2.4 Connection Diagram of Test System

### <WLAN Tx Mode>



### <WLAN Tx Mode with WPC Charging>



**<AC Conducted Emission Mode>**

**<AC Conducted Emission Mode for WPC Charging Mode>**


## 2.5 Support Unit used in test configuration and system

| Item | Equipment          | Trade Name        | Model Name     | FCC ID      | Data Cable        | Power Cord                                                 |
|------|--------------------|-------------------|----------------|-------------|-------------------|------------------------------------------------------------|
| 1.   | LTE Base Station   | R&S               | CMW 500        | N/A         | N/A               | Unshielded, 1.8 m                                          |
| 2.   | DC Power Supply    | TOPWARD           | 3303D          | N/A         | N/A               | Unshielded, 1.8 m                                          |
| 3.   | WLAN AP            | D-Link            | DIR-628        | KA2DIR628A2 | N/A               | Unshielded, 1.8 m                                          |
| 4.   | Notebook           | DELL              | Latitude E6320 | FCC DoC     | N/A               | AC I/P:<br>Unshielded, 1.2 m<br>DC O/P:<br>Shielded, 1.8 m |
| 5.   | Notebook           | Lenovo            | G480           | N/A         | N/A               | AC I/P:<br>Unshielded, 0.9 m<br>DC O/P:<br>Shielded, 1.8 m |
| 6.   | Bluetooth Earphone | Sony<br>Erricsson | MW600          | PY700A2029  | N/A               | N/A                                                        |
| 7.   | iPod               | Apple             | A1285          | FCC DoC     | Shielded, 1.0 m   | N/A                                                        |
| 8.   | Earphone           | Apple             | A1285          | FCC DoC     | Unshielded, 1.2 m | N/A                                                        |
| 9.   | RF Card            | Metro Taipei      | Easy Card      | N/A         | N/A               | N/A                                                        |
| 10.  | SD Card            | SanDisk           | MicroSD HC     | FCC DoC     | N/A               | N/A                                                        |

## 2.6 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

## 2.7 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 5.4 dB and 20dB attenuator.

$$\begin{aligned}\text{Offset (dB)} &= \text{RF cable loss (dB)} + \text{attenuator factor (dB)} \\ &= 5.4 + 20 = 25.4 \text{ (dB)}\end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v03r01.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1MHz and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.

##### 3.1.4 Test Setup



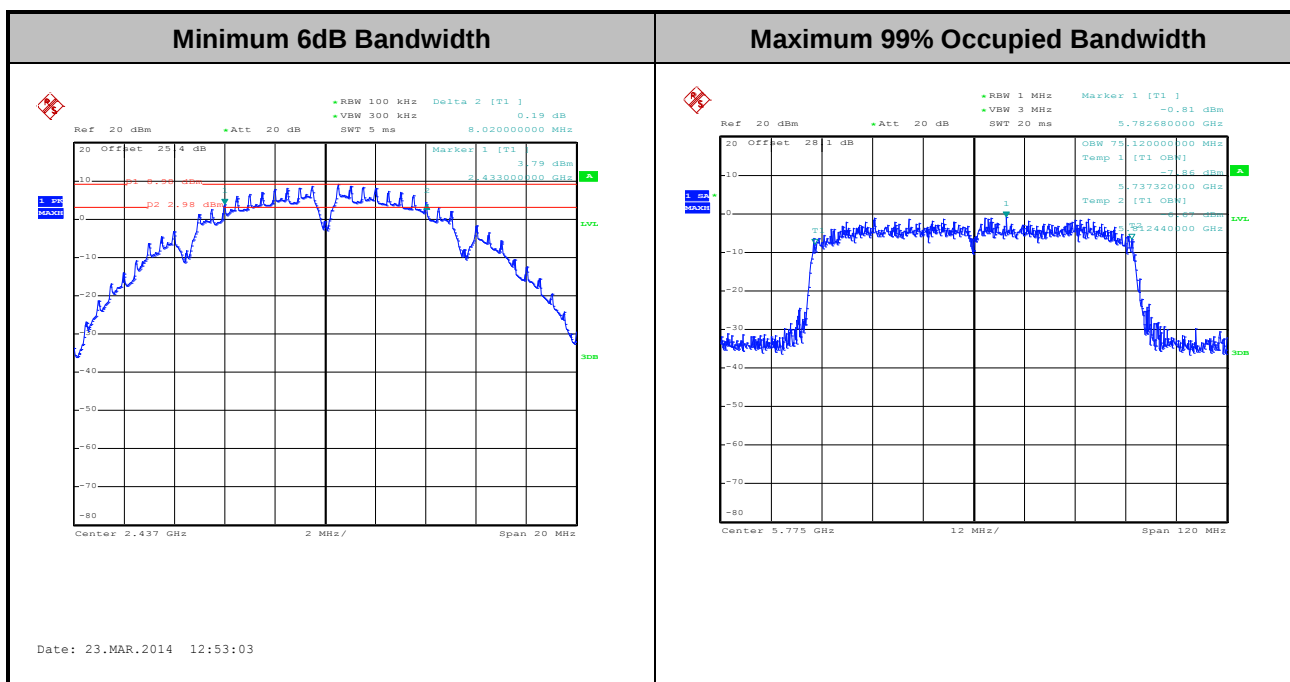
**3.1.5 Test Result of 6dB and 99% Occupied Bandwidth**

|                        |                      |                            |        |
|------------------------|----------------------|----------------------------|--------|
| <b>Test Band :</b>     | 2.4GHz + 5GHz band 4 | <b>Temperature :</b>       | 24~26℃ |
| <b>Test Engineer :</b> | Alex Lee             | <b>Relative Humidity :</b> | 50~53% |

| Mod. | Data Rate | N <sub>TX</sub> | Channel | Freq.<br>(MHz) | 99%<br>Bandwidth<br>(MHz) | 6dB<br>Bandwidth<br>(MHz) | 6dB<br>Bandwidth<br>Min. Limit<br>(MHz) | Pass/Fail |
|------|-----------|-----------------|---------|----------------|---------------------------|---------------------------|-----------------------------------------|-----------|
| 11b  | 1Mbps     | 1               | 1       | 2412           | 13.95                     | 8.54                      | 0.50                                    | Pass      |
| 11b  | 1Mbps     | 1               | 6       | 2437           | 13.60                     | 8.02                      | 0.50                                    | Pass      |
| 11b  | 1Mbps     | 1               | 11      | 2462           | 13.70                     | 8.52                      | 0.50                                    | Pass      |
| 11g  | 6Mbps     | 1               | 1       | 2412           | 18.55                     | 16.32                     | 0.50                                    | Pass      |
| 11g  | 6Mbps     | 1               | 6       | 2437           | 18.00                     | 16.28                     | 0.50                                    | Pass      |
| 11g  | 6Mbps     | 1               | 11      | 2462           | 17.90                     | 16.30                     | 0.50                                    | Pass      |
| HT20 | MCS0      | 1               | 1       | 2412           | 19.00                     | 17.60                     | 0.50                                    | Pass      |
| HT20 | MCS0      | 1               | 6       | 2437           | 18.80                     | 17.34                     | 0.50                                    | Pass      |
| HT20 | MCS0      | 1               | 11      | 2462           | 18.70                     | 17.56                     | 0.50                                    | Pass      |



| Mod.  | Data Rate | N <sub>TX</sub> | Channel | Freq. (MHz) | 99% Bandwidth (MHz) | 6dB Bandwidth (MHz) | 6dB Bandwidth Min. Limit (MHz) | Pass/Fail |
|-------|-----------|-----------------|---------|-------------|---------------------|---------------------|--------------------------------|-----------|
| 11a   | 6Mbps     | 1               | 149     | 5745        | 18.95               | 16.46               | 0.50                           | Pass      |
| 11a   | 6Mbps     | 1               | 157     | 5785        | 19.20               | 16.44               | 0.50                           | Pass      |
| 11a   | 6Mbps     | 1               | 165     | 5825        | 19.40               | 16.44               | 0.50                           | Pass      |
| HT20  | MCS0      | 1               | 149     | 5745        | 19.30               | 17.60               | 0.50                           | Pass      |
| HT20  | MCS0      | 1               | 157     | 5785        | 19.60               | 17.60               | 0.50                           | Pass      |
| HT20  | MCS0      | 1               | 165     | 5825        | 19.50               | 17.58               | 0.50                           | Pass      |
| HT40  | MCS0      | 1               | 151     | 5755        | 37.40               | 35.12               | 0.50                           | Pass      |
| HT40  | MCS0      | 1               | 159     | 5795        | 37.70               | 35.28               | 0.50                           | Pass      |
| VHT20 | MCS0      | 1               | 149     | 5745        | 19.20               | 17.56               | 0.50                           | Pass      |
| VHT20 | MCS0      | 1               | 157     | 5785        | 19.20               | 17.56               | 0.50                           | Pass      |
| VHT20 | MCS0      | 1               | 165     | 5825        | 19.25               | 17.54               | 0.50                           | Pass      |
| VHT40 | MCS0      | 1               | 151     | 5755        | 37.00               | 35.32               | 0.50                           | Pass      |
| VHT40 | MCS0      | 1               | 159     | 5795        | 37.00               | 35.12               | 0.50                           | Pass      |
| VHT80 | MCS0      | 1               | 155     | 5775        | 75.12               | 75.20               | 0.50                           | Pass      |



Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz and 5725-5850MHz, the limit for peak output power is 30dBm. If transmitting Antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the Antenna exceeds 6dBi.

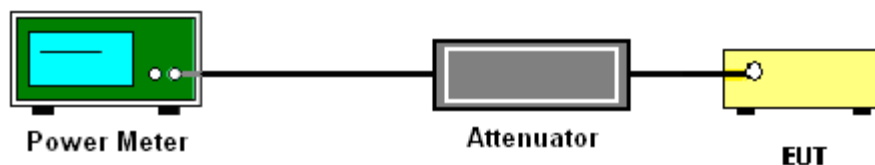
### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r01.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup



**3.2.5 Test Result of Peak Output Power**

|                        |                      |                            |        |
|------------------------|----------------------|----------------------------|--------|
| <b>Test Mode :</b>     | 2.4GHz + 5GHz band 4 | <b>Temperature :</b>       | 24~26℃ |
| <b>Test Engineer :</b> | Alex Lee             | <b>Relative Humidity :</b> | 50~53% |

| Mod. | Data Rate | N <sub>TX</sub> | Channel | Freq.<br>(MHz) | RF Output<br>Power<br>(dBm) | Power<br>Limit<br>(dBm) | DG<br>(dBi) | Pass/Fail |
|------|-----------|-----------------|---------|----------------|-----------------------------|-------------------------|-------------|-----------|
| 11b  | 1Mbps     | 1               | 1       | 2412           | 19.23                       | 30.00                   | -2.00       | Pass      |
| 11b  | 1Mbps     | 1               | 6       | 2437           | 19.02                       | 30.00                   | -2.00       | Pass      |
| 11b  | 1Mbps     | 1               | 11      | 2462           | 19.01                       | 30.00                   | -2.00       | Pass      |
| 11g  | 6Mbps     | 1               | 1       | 2412           | 21.42                       | 30.00                   | -2.00       | Pass      |
| 11g  | 6Mbps     | 1               | 6       | 2437           | 21.82                       | 30.00                   | -2.00       | Pass      |
| 11g  | 6Mbps     | 1               | 11      | 2462           | 21.89                       | 30.00                   | -2.00       | Pass      |
| HT20 | MCS0      | 1               | 1       | 2412           | 19.19                       | 30.00                   | -2.00       | Pass      |
| HT20 | MCS0      | 1               | 6       | 2437           | 19.21                       | 30.00                   | -2.00       | Pass      |
| HT20 | MCS0      | 1               | 11      | 2462           | 19.64                       | 30.00                   | -2.00       | Pass      |



| Mod.  | Data Rate | N <sub>TX</sub> | Channel | Freq.<br>(MHz) | RF Output<br>Power<br>(dBm) | Power<br>Limit<br>(dBm) | DG<br>(dBi) | Pass/Fail |
|-------|-----------|-----------------|---------|----------------|-----------------------------|-------------------------|-------------|-----------|
| 11a   | 6Mbps     | 1               | 149     | 5745           | 20.81                       | 30.00                   | 0.80        | Pass      |
| 11a   | 6Mbps     | 1               | 157     | 5785           | 20.34                       | 30.00                   | 0.80        | Pass      |
| 11a   | 6Mbps     | 1               | 165     | 5825           | 20.51                       | 30.00                   | 0.80        | Pass      |
| HT20  | MCS0      | 1               | 149     | 5745           | 19.44                       | 30.00                   | 0.80        | Pass      |
| HT20  | MCS0      | 1               | 157     | 5785           | 19.36                       | 30.00                   | 0.80        | Pass      |
| HT20  | MCS0      | 1               | 165     | 5825           | 19.33                       | 30.00                   | 0.80        | Pass      |
| HT40  | MCS0      | 1               | 151     | 5755           | 19.03                       | 30.00                   | 0.80        | Pass      |
| HT40  | MCS0      | 1               | 159     | 5795           | 18.79                       | 30.00                   | 0.80        | Pass      |
| VHT20 | MCS0      | 1               | 149     | 5745           | 16.86                       | 30.00                   | 0.80        | Pass      |
| VHT20 | MCS0      | 1               | 157     | 5785           | 17.05                       | 30.00                   | 0.80        | Pass      |
| VHT20 | MCS0      | 1               | 165     | 5825           | 17.41                       | 30.00                   | 0.80        | Pass      |
| VHT40 | MCS0      | 1               | 151     | 5755           | 17.02                       | 30.00                   | 0.80        | Pass      |
| VHT40 | MCS0      | 1               | 159     | 5795           | 16.45                       | 30.00                   | 0.80        | Pass      |
| VHT80 | MCS0      | 1               | 155     | 5775           | 16.60                       | 30.00                   | 0.80        | Pass      |

**Note:** Measured power (dBm) has offset with cable loss.

**3.2.6 Test Result of Average output Power (Reporting Only)**

|                        |                      |                            |        |
|------------------------|----------------------|----------------------------|--------|
| <b>Test Mode :</b>     | 2.4GHz + 5GHz band 4 | <b>Temperature :</b>       | 24~26℃ |
| <b>Test Engineer :</b> | Alex Lee             | <b>Relative Humidity :</b> | 50~53% |

| Mod. | Data Rate | N <sub>TX</sub> | Channel | Freq.<br>(MHz) | Duty<br>Factor<br>(dB) | Average<br>Output<br>Power<br>(dBm) | Power<br>Limit<br>(dBm) | DG<br>(dBi) | Pass/Fail |
|------|-----------|-----------------|---------|----------------|------------------------|-------------------------------------|-------------------------|-------------|-----------|
| 11b  | 1Mbps     | 1               | 1       | 2412           | 0.10                   | 16.50                               | 30.00                   | -2.00       | Pass      |
| 11b  | 1Mbps     | 1               | 6       | 2437           | 0.10                   | 16.42                               | 30.00                   | -2.00       | Pass      |
| 11b  | 1Mbps     | 1               | 11      | 2462           | 0.10                   | 16.32                               | 30.00                   | -2.00       | Pass      |
| 11g  | 6Mbps     | 1               | 1       | 2412           | 0.59                   | 12.80                               | 30.00                   | -2.00       | Pass      |
| 11g  | 6Mbps     | 1               | 6       | 2437           | 0.59                   | 13.00                               | 30.00                   | -2.00       | Pass      |
| 11g  | 6Mbps     | 1               | 11      | 2462           | 0.59                   | 13.35                               | 30.00                   | -2.00       | Pass      |
| HT20 | MCS0      | 1               | 1       | 2412           | 0.63                   | 9.80                                | 30.00                   | -2.00       | Pass      |
| HT20 | MCS0      | 1               | 6       | 2437           | 0.63                   | 9.95                                | 30.00                   | -2.00       | Pass      |
| HT20 | MCS0      | 1               | 11      | 2462           | 0.63                   | 10.16                               | 30.00                   | -2.00       | Pass      |

| Mod.  | Data Rate | N <sub>TX</sub> | Channel | Freq.<br>(MHz) | Duty<br>Factor<br>(dB) | Average<br>Output<br>Power<br>(dBm) | Power<br>Limit<br>(dBm) | DG<br>(dBi) | Pass/Fail |
|-------|-----------|-----------------|---------|----------------|------------------------|-------------------------------------|-------------------------|-------------|-----------|
| 11a   | 6Mbps     | 1               | 149     | 5745           | 0.59                   | 12.43                               | 30.00                   | 0.80        | Pass      |
| 11a   | 6Mbps     | 1               | 157     | 5785           | 0.59                   | 11.93                               | 30.00                   | 0.80        | Pass      |
| 11a   | 6Mbps     | 1               | 165     | 5825           | 0.59                   | 12.10                               | 30.00                   | 0.80        | Pass      |
| HT20  | MCS0      | 1               | 149     | 5745           | 0.66                   | 10.17                               | 30.00                   | 0.80        | Pass      |
| HT20  | MCS0      | 1               | 157     | 5785           | 0.66                   | 10.13                               | 30.00                   | 0.80        | Pass      |
| HT20  | MCS0      | 1               | 165     | 5825           | 0.66                   | 10.15                               | 30.00                   | 0.80        | Pass      |
| HT40  | MCS0      | 1               | 151     | 5755           | 1.21                   | 9.99                                | 30.00                   | 0.80        | Pass      |
| HT40  | MCS0      | 1               | 159     | 5795           | 1.21                   | 9.79                                | 30.00                   | 0.80        | Pass      |
| VHT20 | MCS0      | 1               | 149     | 5745           | 0.82                   | 7.85                                | 30.00                   | 0.80        | Pass      |
| VHT20 | MCS0      | 1               | 157     | 5785           | 0.82                   | 7.91                                | 30.00                   | 0.80        | Pass      |
| VHT20 | MCS0      | 1               | 165     | 5825           | 0.82                   | 8.36                                | 30.00                   | 0.80        | Pass      |
| VHT40 | MCS0      | 1               | 151     | 5755           | 1.47                   | 8.79                                | 30.00                   | 0.80        | Pass      |
| VHT40 | MCS0      | 1               | 159     | 5795           | 1.47                   | 8.19                                | 30.00                   | 0.80        | Pass      |
| VHT80 | MCS0      | 1               | 155     | 5775           | 2.61                   | 8.73                                | 30.00                   | 0.80        | Pass      |

**Note:** Measured power (dBm) has offset with cable loss and duty factor.

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

#### 3.3.4 Test Setup



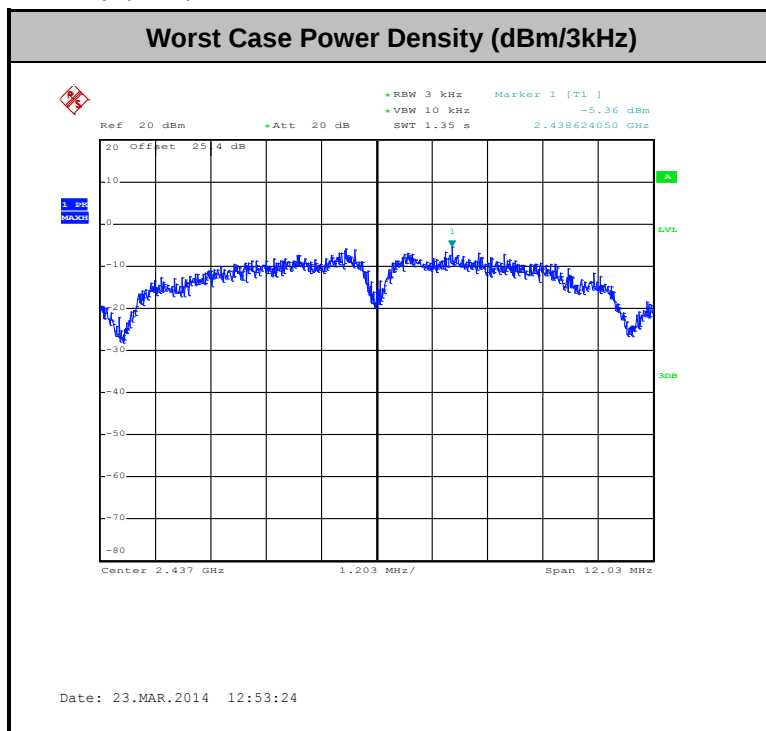
**3.3.5 Test Result of Power Spectral Density**

|                        |                      |                            |        |
|------------------------|----------------------|----------------------------|--------|
| <b>Test Mode :</b>     | 2.4GHz + 5GHz band 4 | <b>Temperature :</b>       | 24~26℃ |
| <b>Test Engineer :</b> | Alex Lee             | <b>Relative Humidity :</b> | 50~53% |

| Mod. | Data Rate | N <sub>TX</sub> | Channel | Freq.<br>(MHz) | Peak Power<br>Density<br>(dBm/3kHz) | Max. Limits<br>(dBm/3kHz) | DG<br>(dBi) | Pass/Fail |
|------|-----------|-----------------|---------|----------------|-------------------------------------|---------------------------|-------------|-----------|
| 11b  | 1Mbps     | 1               | 1       | 2412           | -6.27                               | 8.00                      | -2.00       | Pass      |
| 11b  | 1Mbps     | 1               | 6       | 2437           | -5.36                               | 8.00                      | -2.00       | Pass      |
| 11b  | 1Mbps     | 1               | 11      | 2462           | -6.63                               | 8.00                      | -2.00       | Pass      |
| 11g  | 6Mbps     | 1               | 1       | 2412           | -12.52                              | 8.00                      | -2.00       | Pass      |
| 11g  | 6Mbps     | 1               | 6       | 2437           | -10.74                              | 8.00                      | -2.00       | Pass      |
| 11g  | 6Mbps     | 1               | 11      | 2462           | -12.41                              | 8.00                      | -2.00       | Pass      |
| HT20 | MCS0      | 1               | 1       | 2412           | -14.50                              | 8.00                      | -2.00       | Pass      |
| HT20 | MCS0      | 1               | 6       | 2437           | -15.51                              | 8.00                      | -2.00       | Pass      |
| HT20 | MCS0      | 1               | 11      | 2462           | -16.01                              | 8.00                      | -2.00       | Pass      |

| Mod.  | Data Rate | N <sub>TX</sub> | Channel | Freq. (MHz) | Peak Power Density (dBm/3kHz) | Max. Limits (dBm/3kHz) | DG (dBi) | Pass/Fail |
|-------|-----------|-----------------|---------|-------------|-------------------------------|------------------------|----------|-----------|
| 11a   | 6Mbps     | 1               | 149     | 5745        | -12.17                        | 8.00                   | 0.80     | Pass      |
| 11a   | 6Mbps     | 1               | 157     | 5785        | -13.78                        | 8.00                   | 0.80     | Pass      |
| 11a   | 6Mbps     | 1               | 165     | 5825        | -13.42                        | 8.00                   | 0.80     | Pass      |
| HT20  | MCS0      | 1               | 149     | 5745        | -15.24                        | 8.00                   | 0.80     | Pass      |
| HT20  | MCS0      | 1               | 157     | 5785        | -14.22                        | 8.00                   | 0.80     | Pass      |
| HT20  | MCS0      | 1               | 165     | 5825        | -15.81                        | 8.00                   | 0.80     | Pass      |
| HT40  | MCS0      | 1               | 151     | 5755        | -18.89                        | 8.00                   | 0.80     | Pass      |
| HT40  | MCS0      | 1               | 159     | 5795        | -18.43                        | 8.00                   | 0.80     | Pass      |
| VHT20 | MCS0      | 1               | 149     | 5745        | -18.61                        | 8.00                   | 0.80     | Pass      |
| VHT20 | MCS0      | 1               | 157     | 5785        | -17.61                        | 8.00                   | 0.80     | Pass      |
| VHT20 | MCS0      | 1               | 165     | 5825        | -17.97                        | 8.00                   | 0.80     | Pass      |
| VHT40 | MCS0      | 1               | 151     | 5755        | -21.41                        | 8.00                   | 0.80     | Pass      |
| VHT40 | MCS0      | 1               | 159     | 5795        | -21.39                        | 8.00                   | 0.80     | Pass      |
| VHT80 | MCS0      | 1               | 155     | 5775        | -23.60                        | 8.00                   | 0.80     | Pass      |

**Note:** Measured power density (dBm) has offset with cable loss.



## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

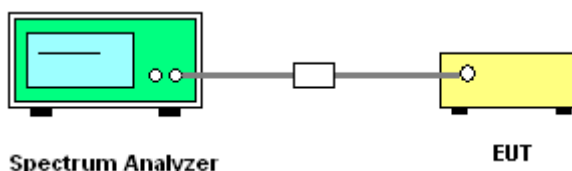
### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.4.3 Test Procedures

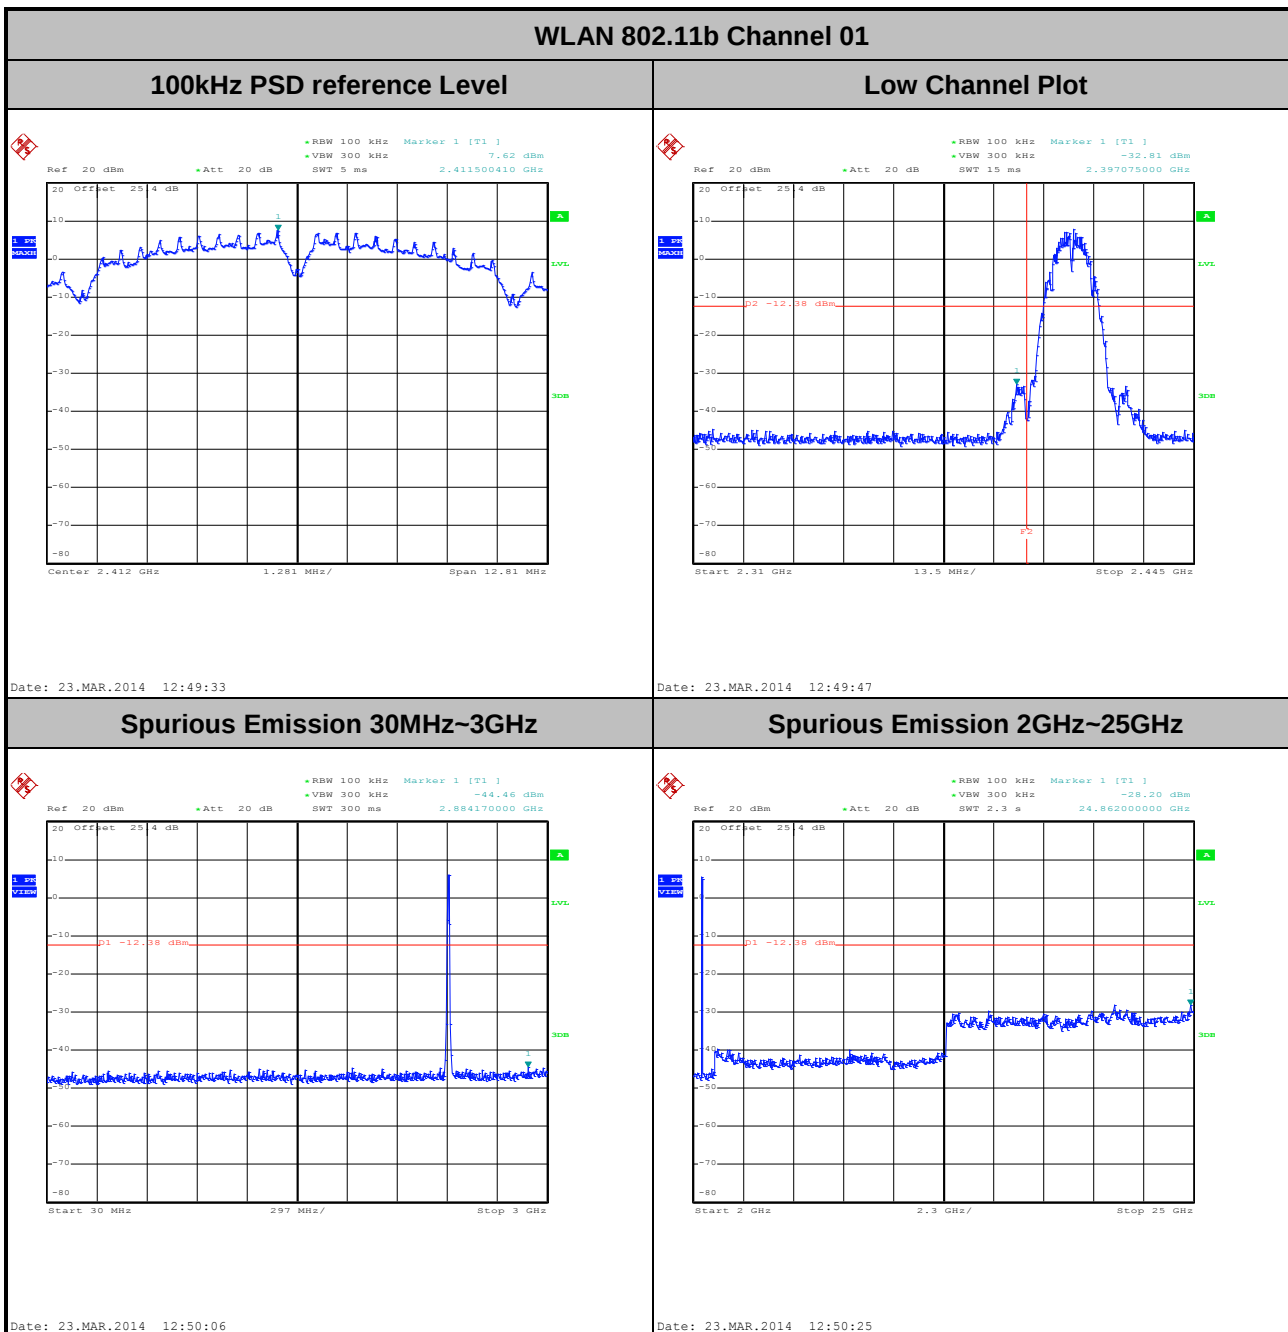
1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 3.4.4 Test Setup



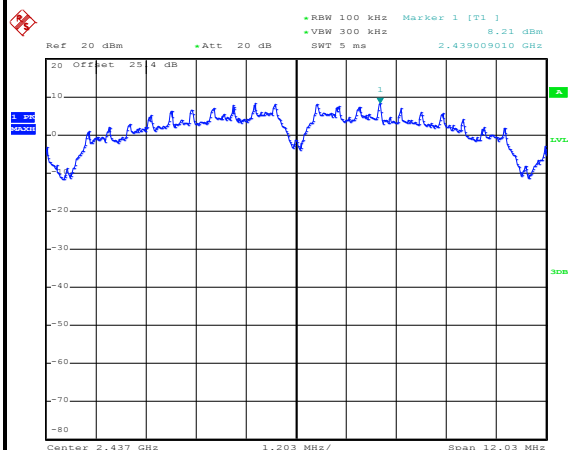
### 3.4.5 Test Result of Conducted Band Edges and Spurious Emission

|                |            |                     |          |
|----------------|------------|---------------------|----------|
| Test Mode :    | 802.11b    | Temperature :       | 24~26℃   |
| Test Band :    | 2.4GHz Low | Relative Humidity : | 50~53%   |
| Test Channel : | 01         | Test Engineer :     | Alex Lee |

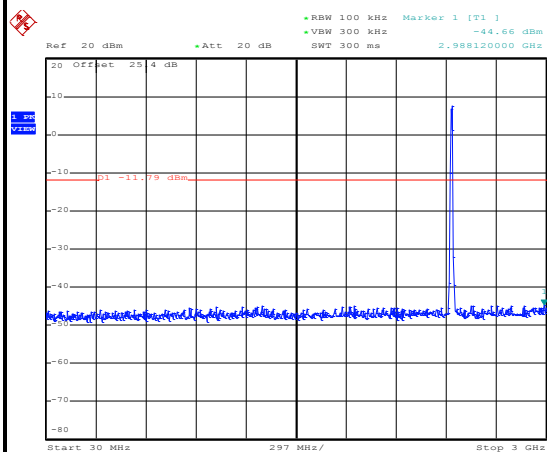




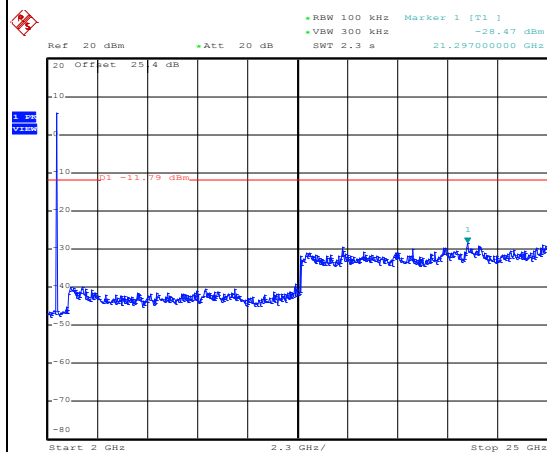
|                |            |                     |          |
|----------------|------------|---------------------|----------|
| Test Mode :    | 802.11b    | Temperature :       | 24~26°C  |
| Test Band :    | 2.4GHz Mid | Relative Humidity : | 50~53%   |
| Test Channel : | 06         | Test Engineer :     | Alex Lee |

**WLAN 802.11b Channel 06****100kHz PSD reference Level**

Date: 23.MAR.2014 12:53:33

**Spurious Emission 30MHz~3GHz**

Date: 23.MAR.2014 12:53:53

**Spurious Emission 2GHz~25GHz**

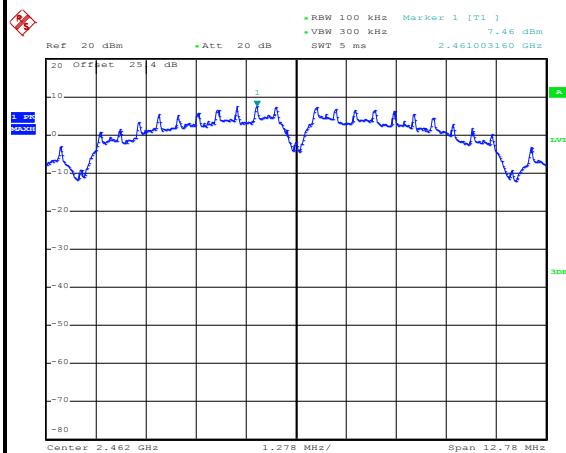
Date: 23.MAR.2014 12:54:11



|                |             |                     |          |
|----------------|-------------|---------------------|----------|
| Test Mode :    | 802.11b     | Temperature :       | 24~26°C  |
| Test Band :    | 2.4GHz High | Relative Humidity : | 50~53%   |
| Test Channel : | 11          | Test Engineer :     | Alex Lee |

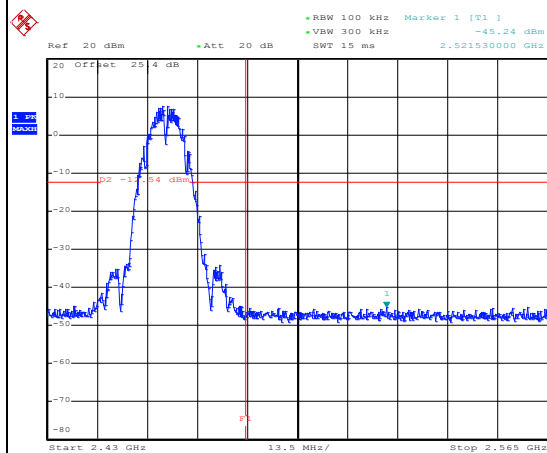
## WLAN 802.11b Channel 11

## 100kHz PSD reference Level



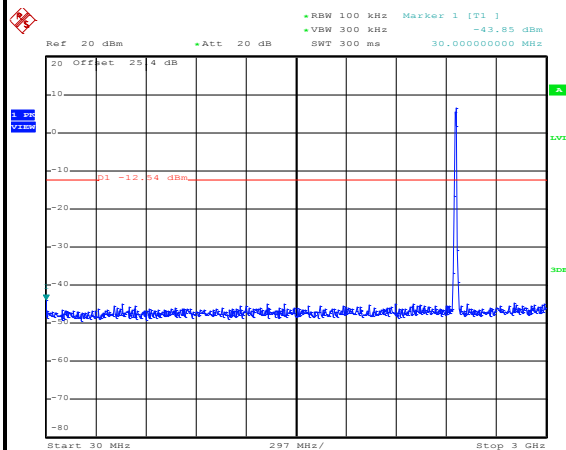
Date: 23.MAR.2014 12:56:31

## High Channel Plot



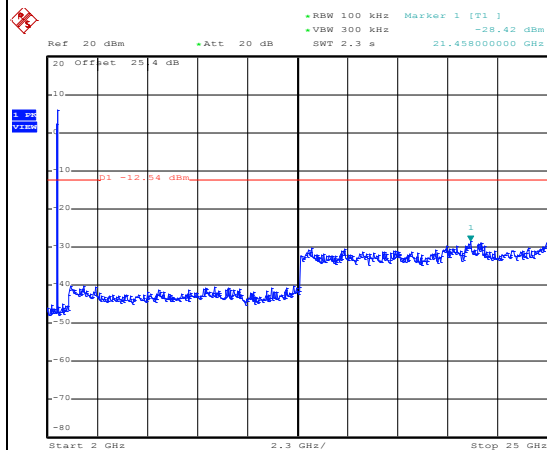
Date: 23.MAR.2014 12:56:45

## Spurious Emission 30MHz~3GHz



Date: 23.MAR.2014 12:57:04

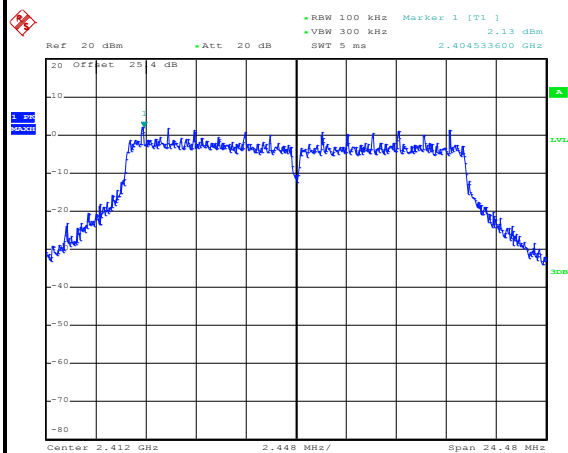
## Spurious Emission 2GHz~25GHz



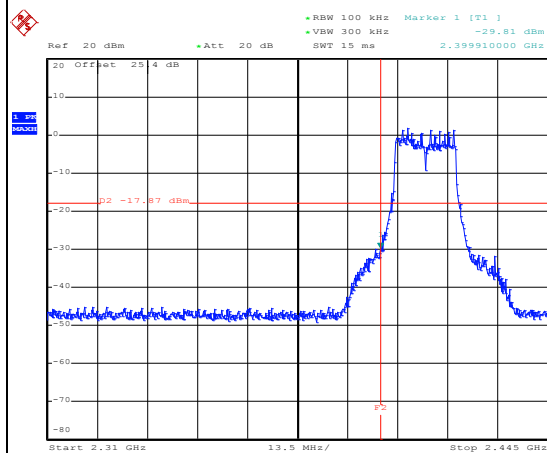
Date: 23.MAR.2014 12:57:22



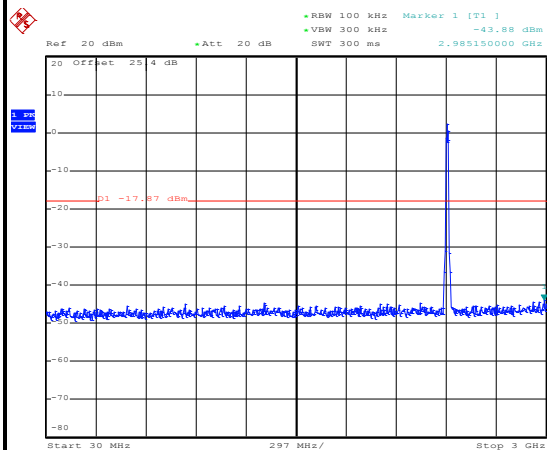
|                |            |                     |          |
|----------------|------------|---------------------|----------|
| Test Mode :    | 802.11g    | Temperature :       | 24~26°C  |
| Test Band :    | 2.4GHz Low | Relative Humidity : | 50~53%   |
| Test Channel : | 01         | Test Engineer :     | Alex Lee |

**WLAN 802.11g Channel 01****100kHz PSD reference Level**

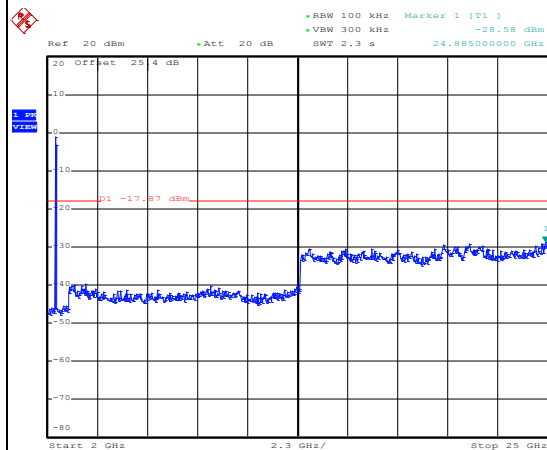
Date: 23.MAR.2014 13:07:18

**Low Channel Plot**

Date: 23.MAR.2014 13:07:32

**Spurious Emission 30MHz~3GHz**


Date: 23.MAR.2014 13:07:51

**Spurious Emission 2GHz~25GHz**

Date: 23.MAR.2014 13:08:09



|                            |  |
|----------------------------|--|
| WLAN 802.11g Channel 06    |  |
| 100kHz PSD reference Level |  |

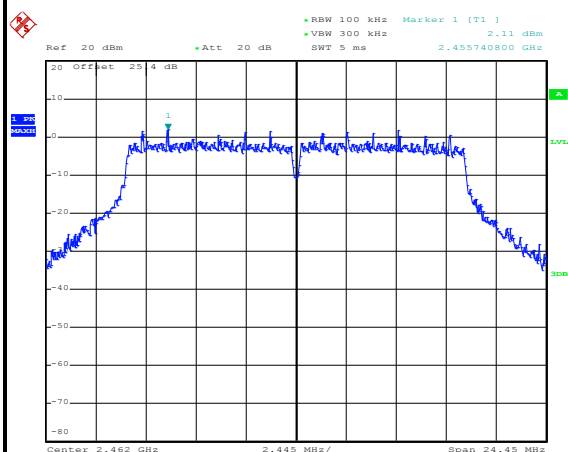




|                |             |                     |          |
|----------------|-------------|---------------------|----------|
| Test Mode :    | 802.11g     | Temperature :       | 24~26°C  |
| Test Band :    | 2.4GHz High | Relative Humidity : | 50~53%   |
| Test Channel : | 11          | Test Engineer :     | Alex Lee |

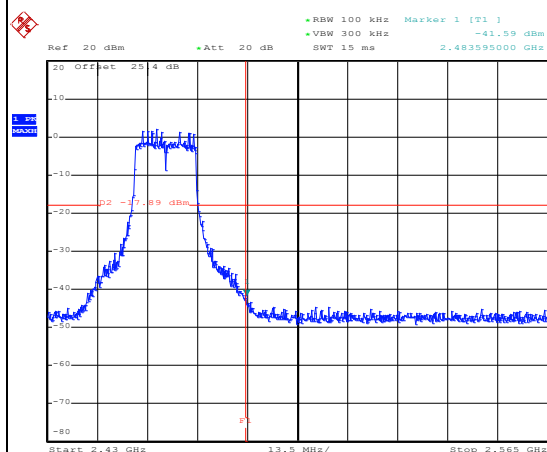
## WLAN 802.11g Channel 11

## 100kHz PSD reference Level



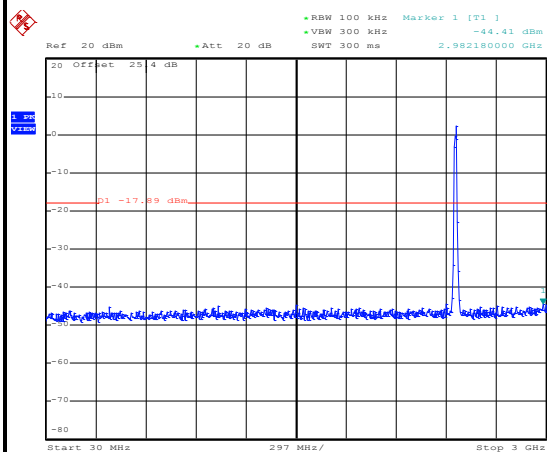
Date: 23.MAR.2014 12:59:57

## High Channel Plot



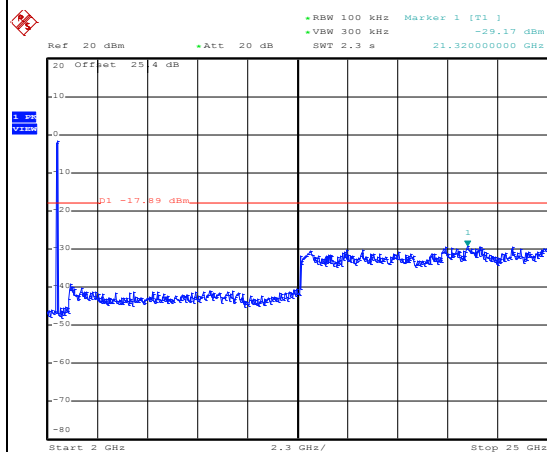
Date: 23.MAR.2014 13:00:11

## Spurious Emission 30MHz~3GHz



Date: 23.MAR.2014 13:00:30

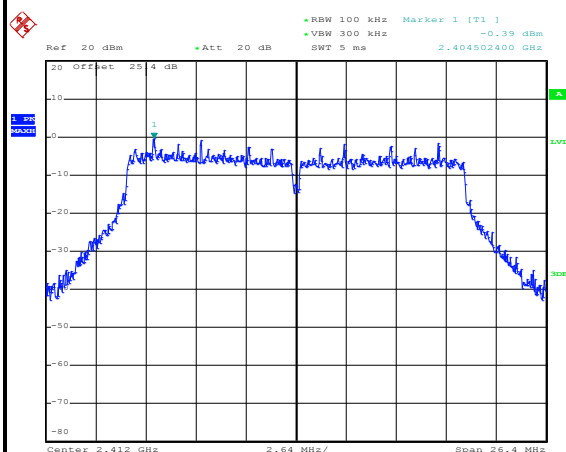
## Spurious Emission 2GHz~25GHz



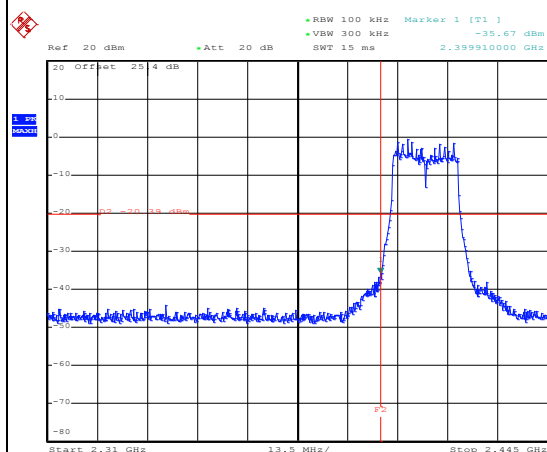
Date: 23.MAR.2014 13:00:49



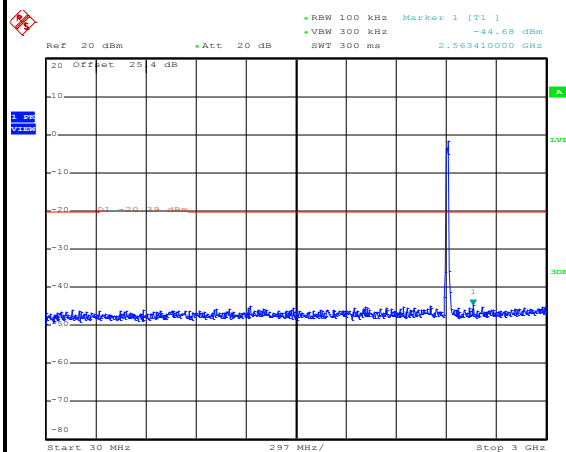
|                |              |                     |          |
|----------------|--------------|---------------------|----------|
| Test Mode :    | 802.11n HT20 | Temperature :       | 24~26°C  |
| Test Band :    | 2.4GHz Low   | Relative Humidity : | 50~53%   |
| Test Channel : | 01           | Test Engineer :     | Alex Lee |

**WLAN 802.11n HT20 Channel 01****100kHz PSD reference Level**

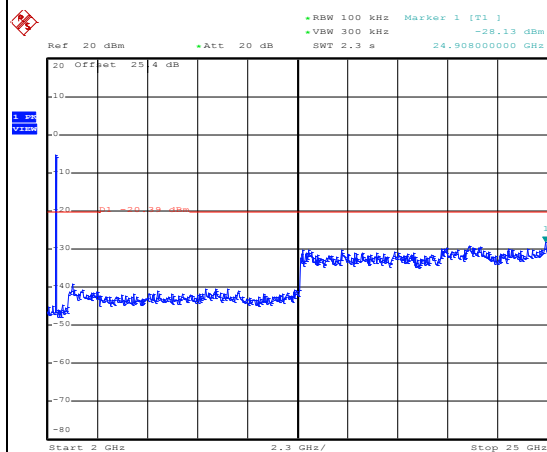
Date: 23.MAR.2014 13:13:28

**Low Channel Plot**

Date: 23.MAR.2014 13:13:42

**Spurious Emission 30MHz~3GHz**

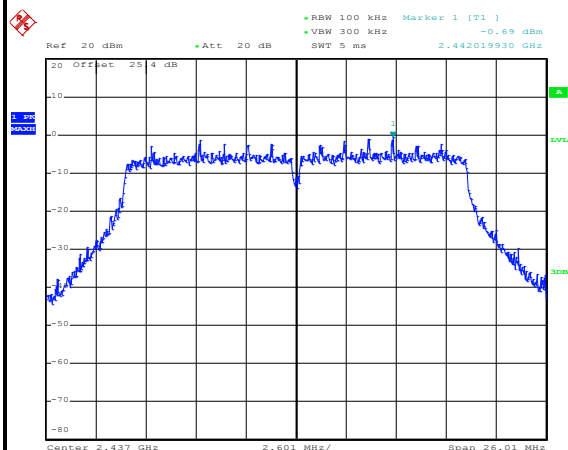
Date: 23.MAR.2014 13:14:01

**Spurious Emission 2GHz~25GHz**

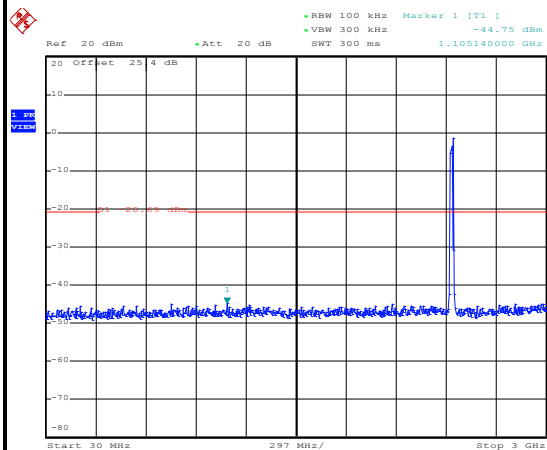
Date: 23.MAR.2014 13:14:19



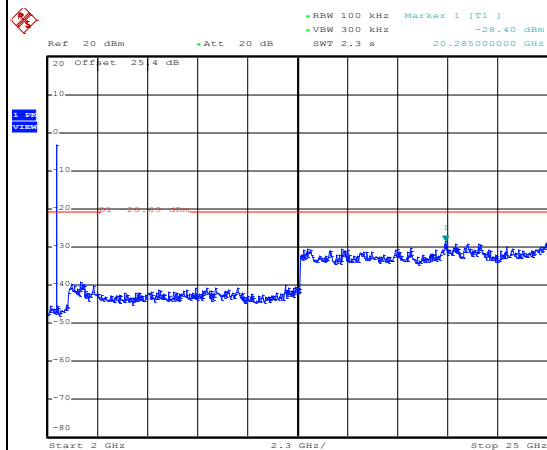
|                |              |                     |          |
|----------------|--------------|---------------------|----------|
| Test Mode :    | 802.11n HT20 | Temperature :       | 24~26°C  |
| Test Band :    | 2.4GHz Mid   | Relative Humidity : | 50~53%   |
| Test Channel : | 06           | Test Engineer :     | Alex Lee |

**WLAN 802.11n HT20 Channel 06****100kHz PSD reference Level**

Date: 23.MAR.2014 13:16:41

**Spurious Emission 30MHz~3GHz**

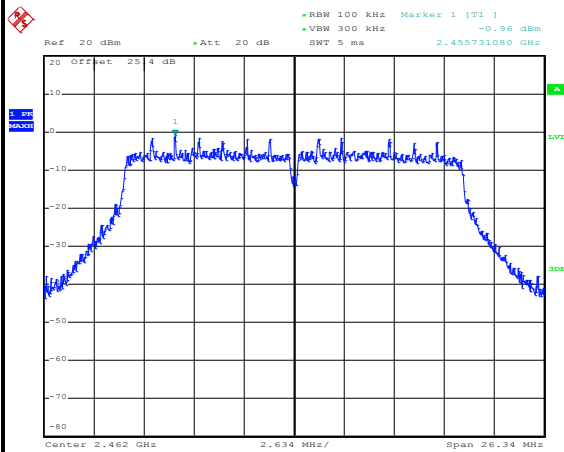
Date: 23.MAR.2014 13:17:00

**Spurious Emission 2GHz~25GHz**

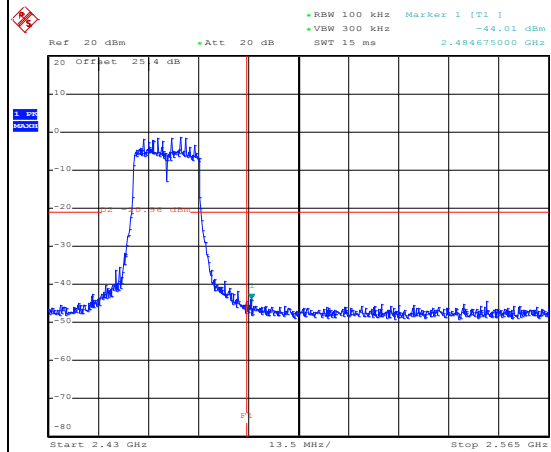
Date: 23.MAR.2014 13:17:19



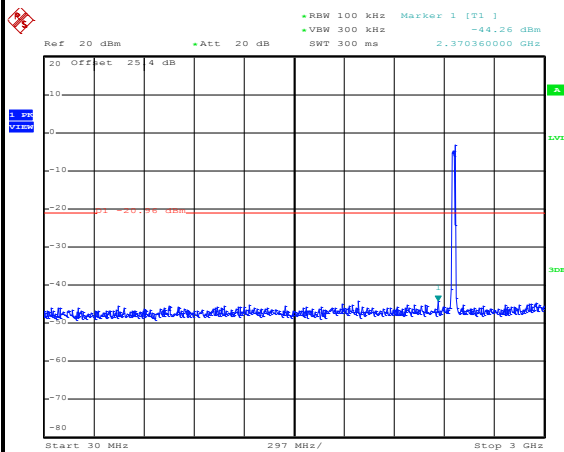
|                |              |                     |          |
|----------------|--------------|---------------------|----------|
| Test Mode :    | 802.11n HT20 | Temperature :       | 24~26°C  |
| Test Band :    | 2.4GHz High  | Relative Humidity : | 50~53%   |
| Test Channel : | 11           | Test Engineer :     | Alex Lee |

**WLAN 802.11n HT20 Channel 11****100kHz PSD reference Level**

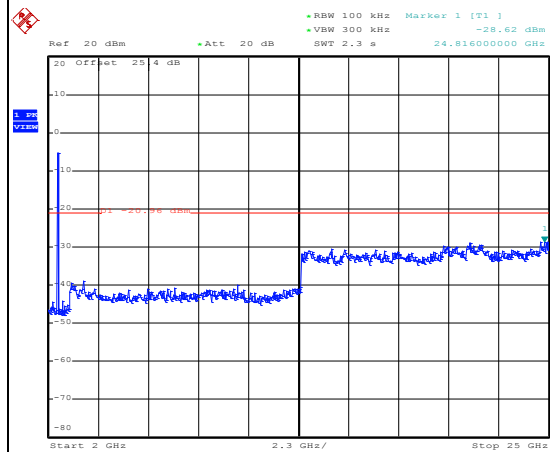
Date: 23.MAR.2014 13:19:52

**High Channel Plot**

Date: 23.MAR.2014 13:20:06

**Spurious Emission 30MHz~3GHz**

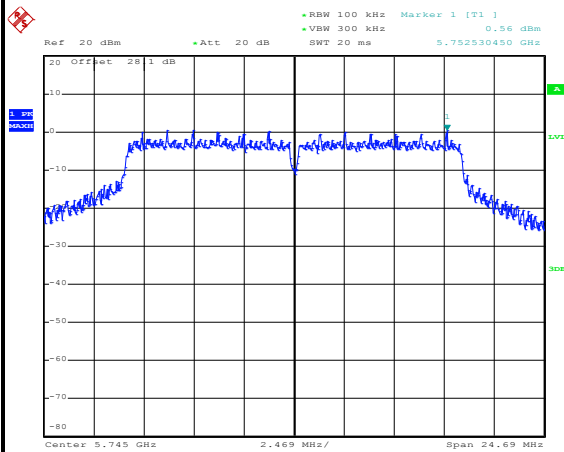
Date: 23.MAR.2014 13:20:25

**Spurious Emission 2GHz~25GHz**

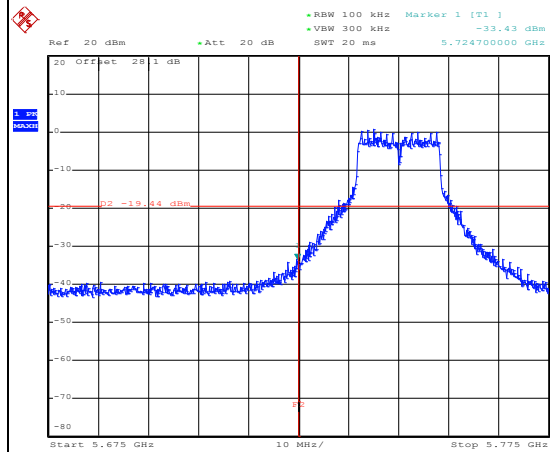
Date: 23.MAR.2014 13:20:44



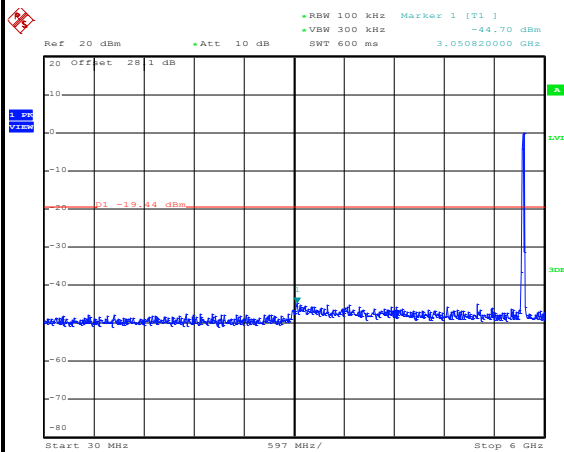
|                |          |                     |          |
|----------------|----------|---------------------|----------|
| Test Mode :    | 802.11a  | Temperature :       | 24~26°C  |
| Test Band :    | 5GHz Low | Relative Humidity : | 50~53%   |
| Test Channel : | 149      | Test Engineer :     | Alex Lee |

**WLAN 802.11a Channel 149****100kHz PSD reference Level**

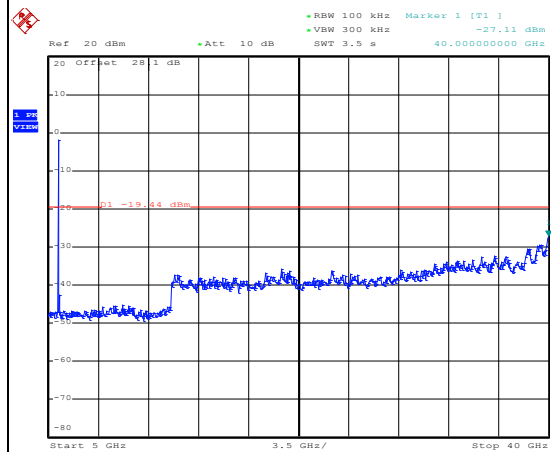
Date: 23.MAR.2014 14:18:37

**Low Channel Plot**

Date: 23.MAR.2014 14:18:51

**Spurious Emission 30MHz~6GHz**

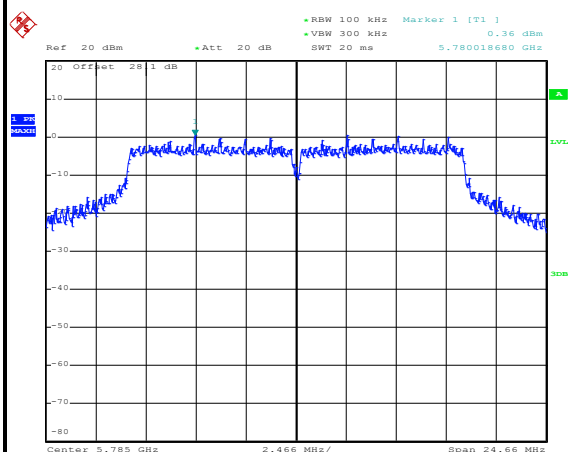
Date: 23.MAR.2014 14:19:10

**Spurious Emission 5GHz~40GHz**

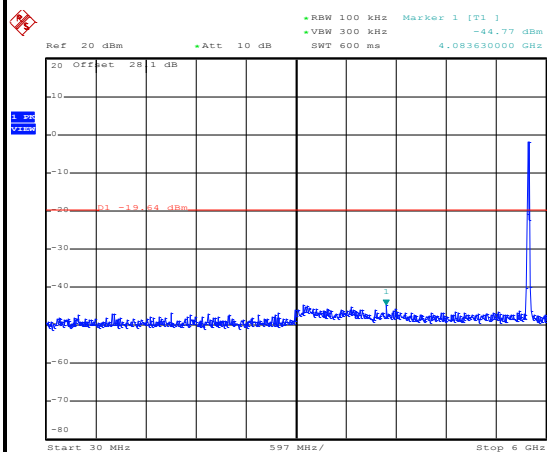
Date: 23.MAR.2014 14:19:29



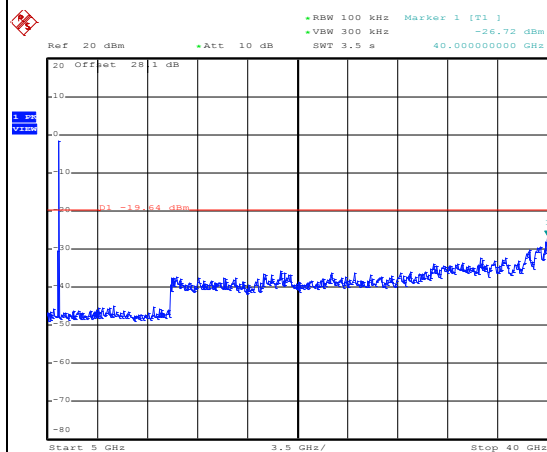
|                |          |                     |          |
|----------------|----------|---------------------|----------|
| Test Mode :    | 802.11a  | Temperature :       | 24~26°C  |
| Test Band :    | 5GHz Mid | Relative Humidity : | 50~53%   |
| Test Channel : | 157      | Test Engineer :     | Alex Lee |

**WLAN 802.11a Channel 157****100kHz PSD reference Level**

Date: 23.MAR.2014 14:14:23

**Spurious Emission 30MHz~6GHz**

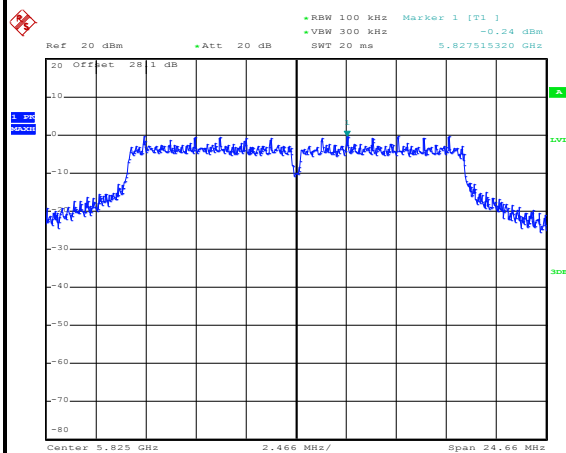
Date: 23.MAR.2014 14:14:43

**Spurious Emission 5GHz~40GHz**

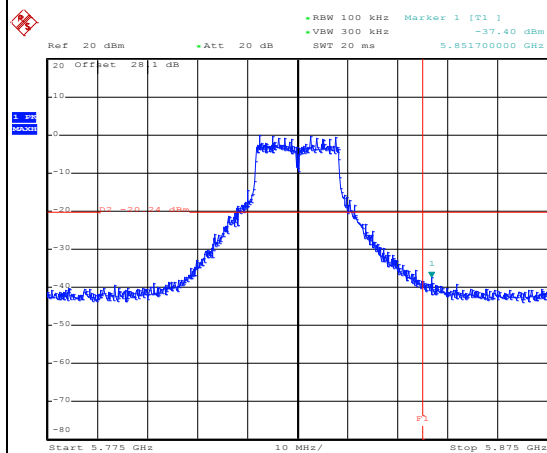
Date: 23.MAR.2014 14:15:01



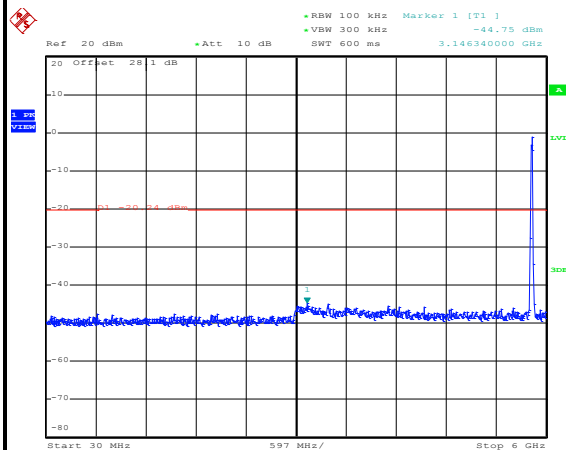
|                |           |                     |          |
|----------------|-----------|---------------------|----------|
| Test Mode :    | 802.11a   | Temperature :       | 24~26°C  |
| Test Band :    | 5GHz High | Relative Humidity : | 50~53%   |
| Test Channel : | 165       | Test Engineer :     | Alex Lee |

**WLAN 802.11a Channel 165****100kHz PSD reference Level**

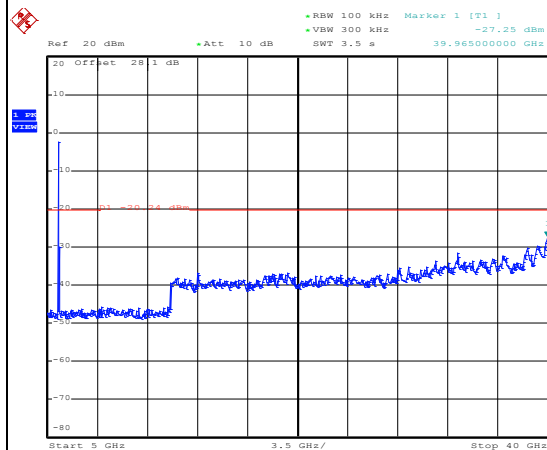
Date: 23.MAR.2014 14:08:47

**High Channel Plot**

Date: 23.MAR.2014 14:12:04

**Spurious Emission 30MHz~6GHz**

Date: 23.MAR.2014 14:09:21

**Spurious Emission 5GHz~40GHz**

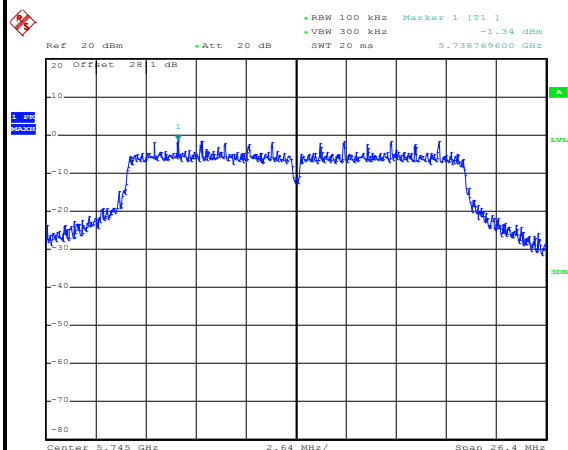
Date: 23.MAR.2014 14:09:39



|                |              |                     |          |
|----------------|--------------|---------------------|----------|
| Test Mode :    | 802.11n HT20 | Temperature :       | 24~26°C  |
| Test Band :    | 5GHz Low     | Relative Humidity : | 50~53%   |
| Test Channel : | 149          | Test Engineer :     | Alex Lee |

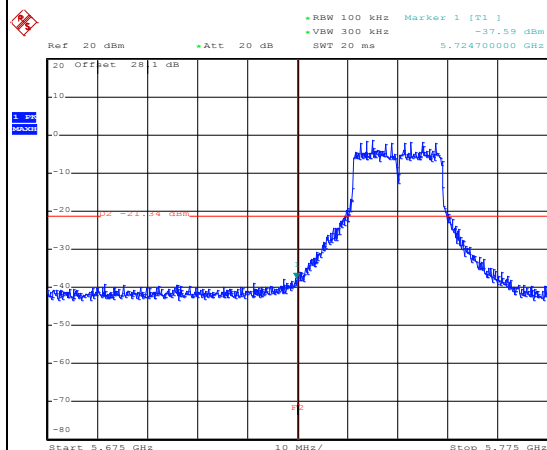
## WLAN 802.11n HT20 Channel 149

## 100kHz PSD reference Level



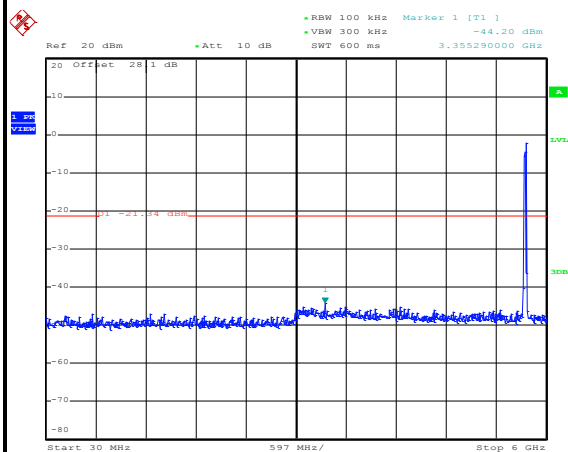
Date: 23.MAR.2014 13:54:12

## Low Channel Plot



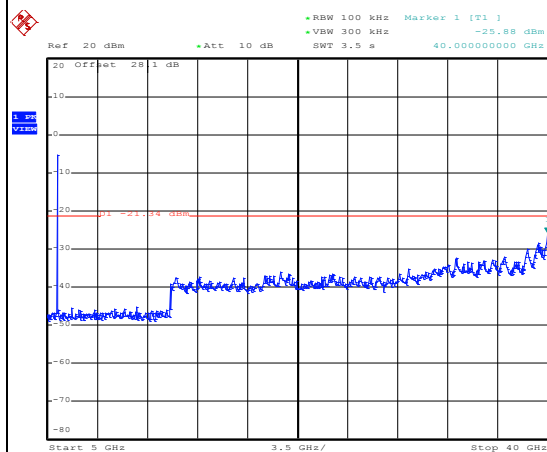
Date: 23.MAR.2014 13:56:42

## Spurious Emission 30MHz~6GHz



Date: 23.MAR.2014 13:54:45

## Spurious Emission 5GHz~40GHz

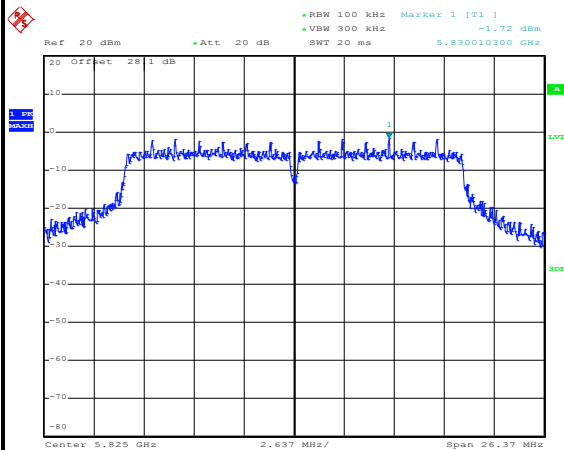


Date: 23.MAR.2014 13:55:04

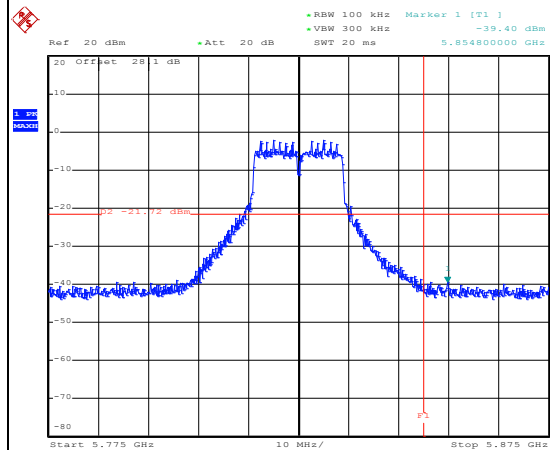




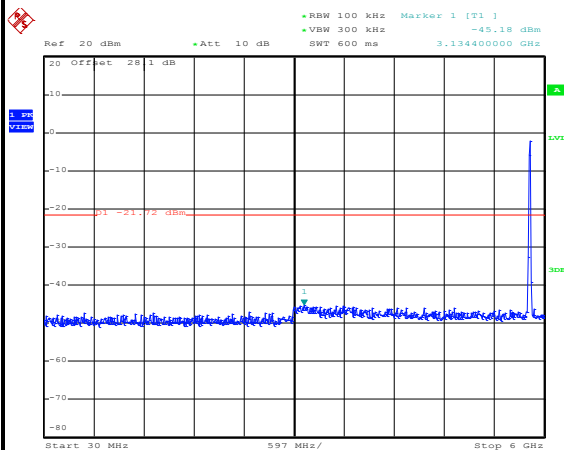
|                |              |                     |          |
|----------------|--------------|---------------------|----------|
| Test Mode :    | 802.11n HT20 | Temperature :       | 24~26°C  |
| Test Band :    | 5GHz High    | Relative Humidity : | 50~53%   |
| Test Channel : | 165          | Test Engineer :     | Alex Lee |

**WLAN 802.11n HT20 Channel 165****100kHz PSD reference Level**

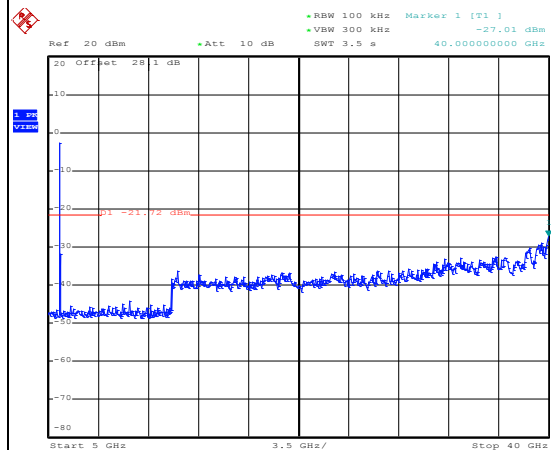
Date: 23.MAR.2014 14:04:59

**High Channel Plot**

Date: 23.MAR.2014 14:05:13

**Spurious Emission 30MHz~6GHz**

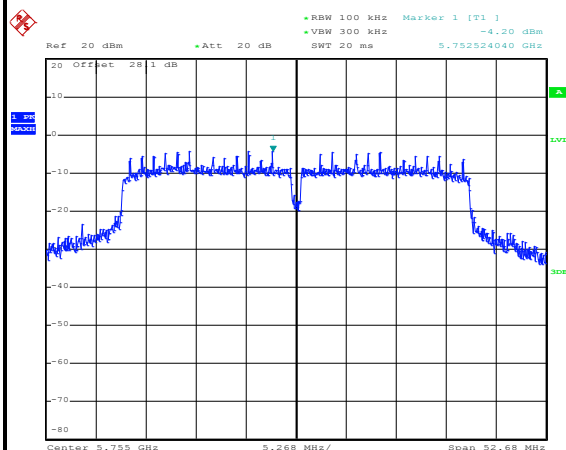
Date: 23.MAR.2014 14:05:32

**Spurious Emission 5GHz~40GHz**

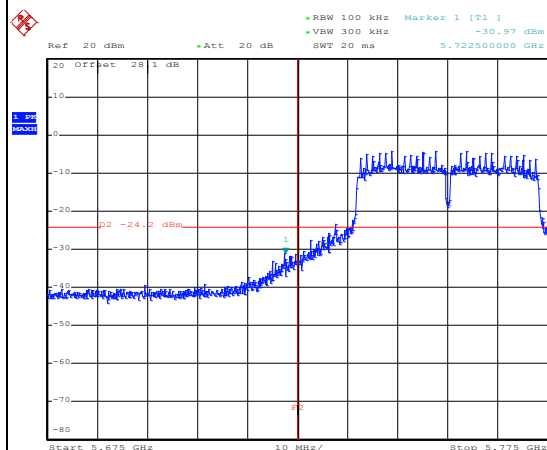
Date: 23.MAR.2014 14:05:50



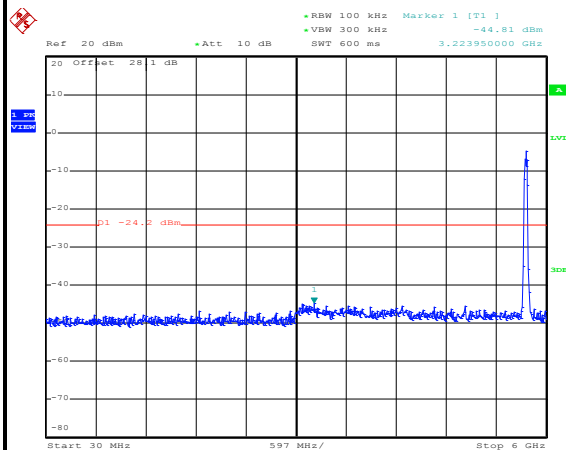
|                |              |                     |          |
|----------------|--------------|---------------------|----------|
| Test Mode :    | 802.11n HT40 | Temperature :       | 24~26°C  |
| Test Band :    | 5GHz Low     | Relative Humidity : | 50~53%   |
| Test Channel : | 151          | Test Engineer :     | Alex Lee |

**WLAN 802.11n HT40 Channel 151****100kHz PSD reference Level**

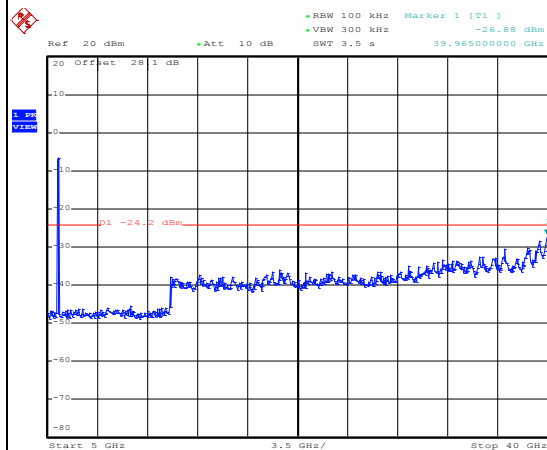
Date: 23.MAR.2014 13:39:52

**Low Channel Plot**

Date: 23.MAR.2014 13:40:06

**Spurious Emission 30MHz~6GHz**

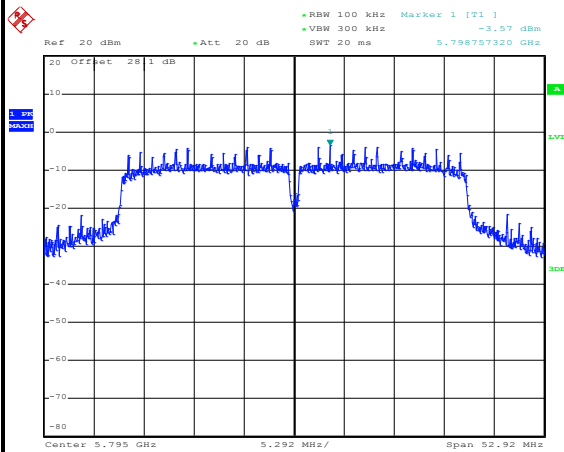
Date: 23.MAR.2014 13:41:27

**Spurious Emission 5GHz~40GHz**

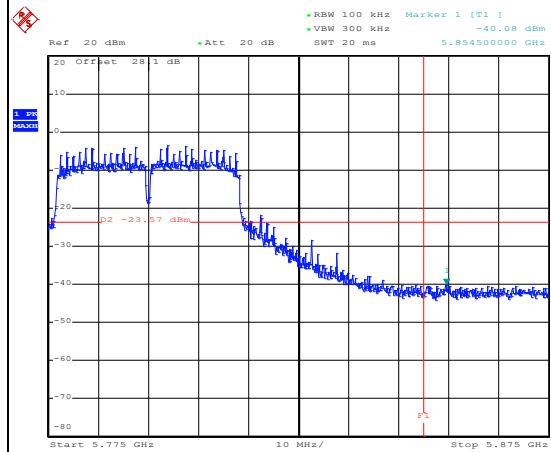
Date: 23.MAR.2014 13:41:46



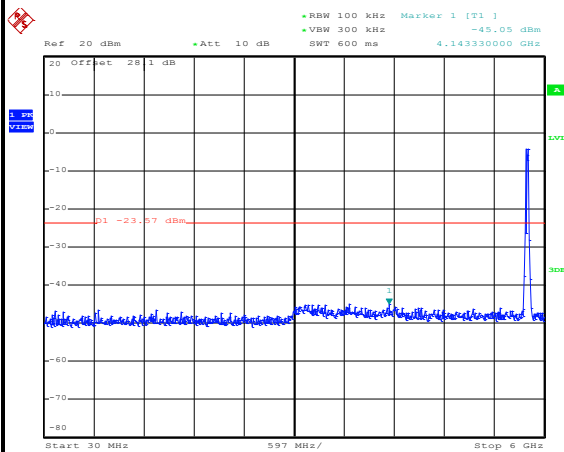
|                |              |                     |          |
|----------------|--------------|---------------------|----------|
| Test Mode :    | 802.11n HT40 | Temperature :       | 24~26°C  |
| Test Band :    | 5GHz High    | Relative Humidity : | 50~53%   |
| Test Channel : | 159          | Test Engineer :     | Alex Lee |

**WLAN 802.11n HT40 Channel 159****100kHz PSD reference Level**

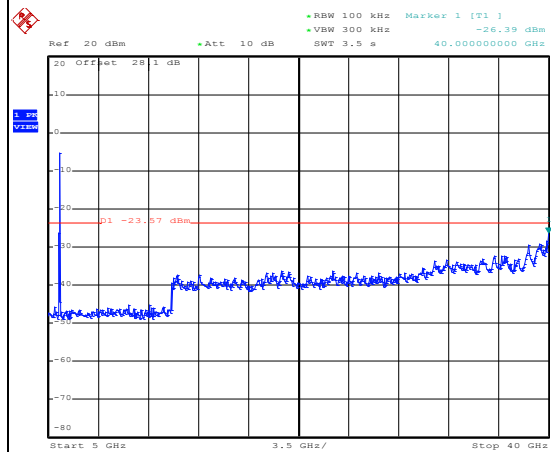
Date: 23.MAR.2014 13:44:54

**High Channel Plot**

Date: 23.MAR.2014 13:45:08

**Spurious Emission 30MHz~6GHz**

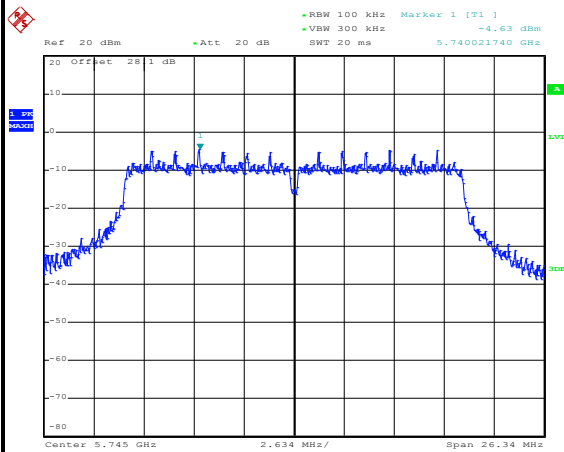
Date: 23.MAR.2014 13:45:27

**Spurious Emission 5GHz~40GHz**

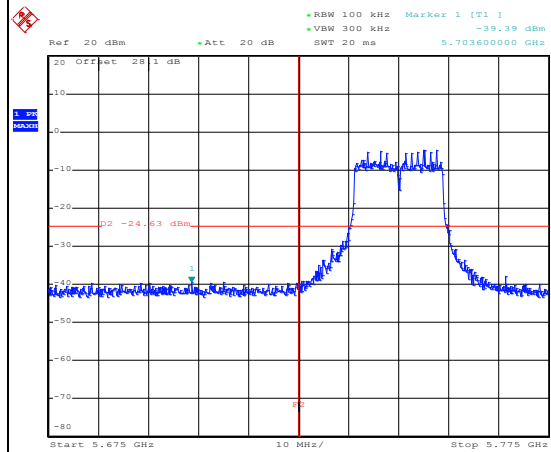
Date: 23.MAR.2014 13:45:46



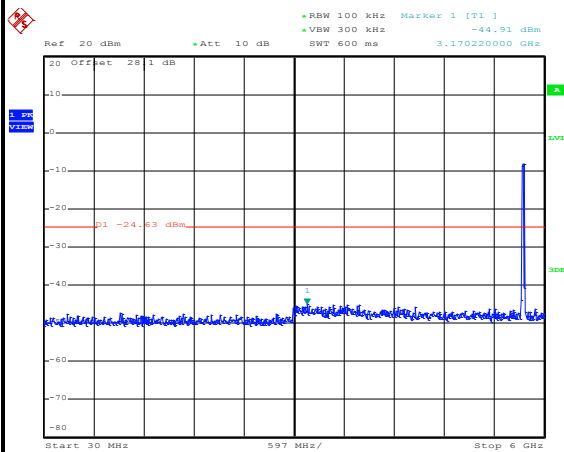
|                |                |                     |          |
|----------------|----------------|---------------------|----------|
| Test Mode :    | 802.11ac VHT20 | Temperature :       | 24~26°C  |
| Test Band :    | 5GHz Low       | Relative Humidity : | 50~53%   |
| Test Channel : | 149            | Test Engineer :     | Alex Lee |

**WLAN 802.11ac VHT20 Channel 149****100kHz PSD reference Level**

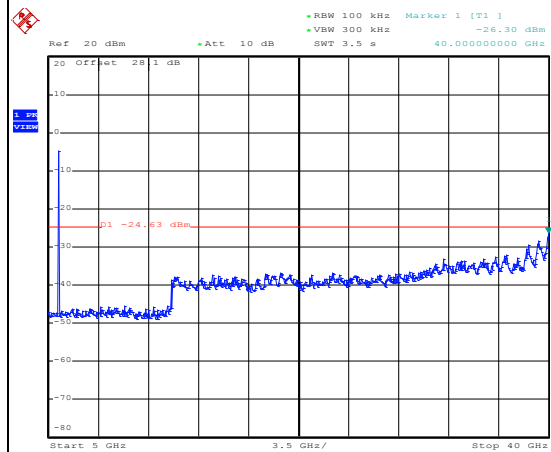
Date: 23.MAR.2014 14:26:17

**Low Channel Plot**

Date: 23.MAR.2014 14:26:31

**Spurious Emission 30MHz~6GHz**

Date: 23.MAR.2014 14:26:50

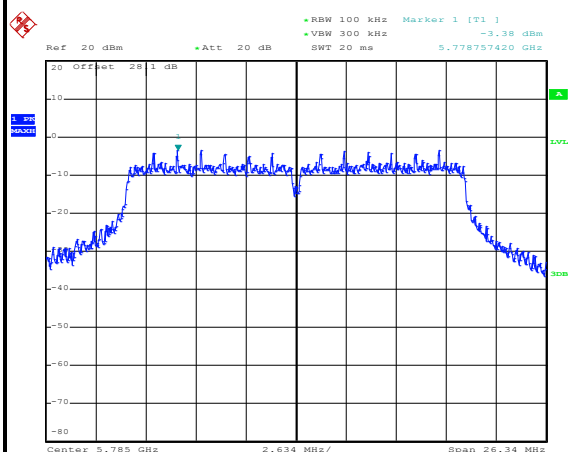
**Spurious Emission 5GHz~40GHz**

Date: 23.MAR.2014 14:27:08

|                       |                |                            |          |
|-----------------------|----------------|----------------------------|----------|
| <b>Test Mode :</b>    | 802.11ac VHT20 | <b>Temperature :</b>       | 24~26℃   |
| <b>Test Band :</b>    | 5GHz Mid       | <b>Relative Humidity :</b> | 50~53%   |
| <b>Test Channel :</b> | 157            | <b>Test Engineer :</b>     | Alex Lee |

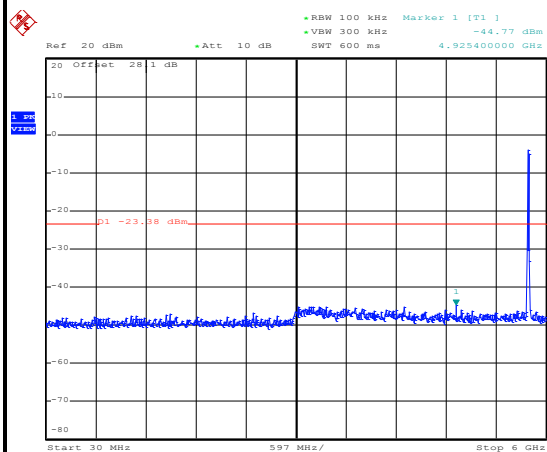
## WLAN 802.11ac VHT20 Channel 157

## 100kHz PSD reference Level



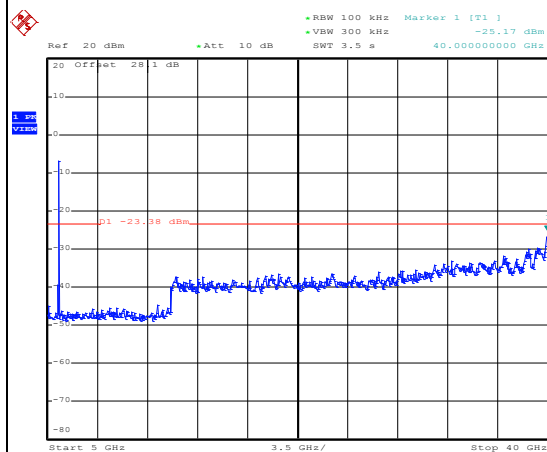
Date: 23.MAR.2014 14:30:04

## Spurious Emission 30MHz~6GHz



Date: 23.MAR.2014 14:30:24

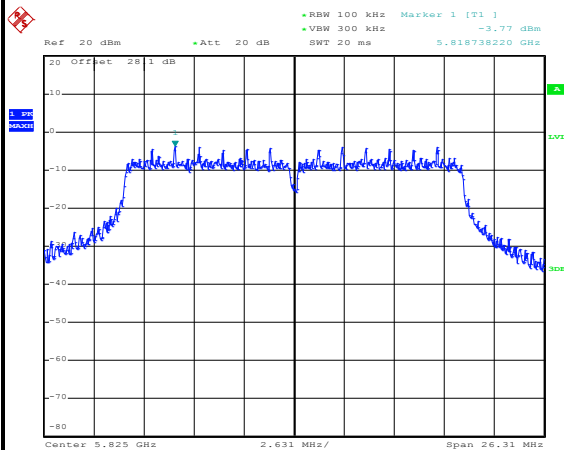
## Spurious Emission 5GHz~40GHz



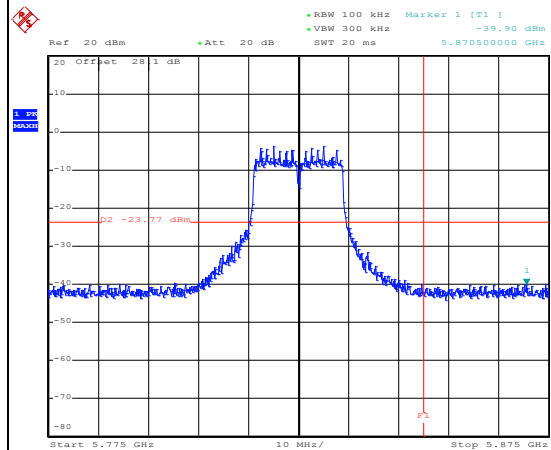
Date: 23.MAR.2014 14:30:42



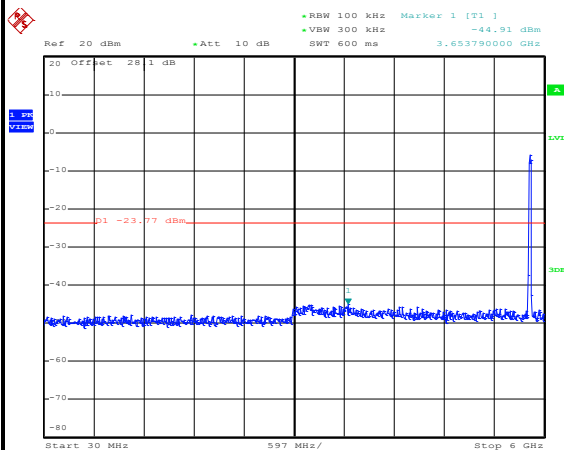
|                |                |                     |          |
|----------------|----------------|---------------------|----------|
| Test Mode :    | 802.11ac VHT20 | Temperature :       | 24~26°C  |
| Test Band :    | 5GHz High      | Relative Humidity : | 50~53%   |
| Test Channel : | 165            | Test Engineer :     | Alex Lee |

**WLAN 802.11ac VHT20 Channel 165****100kHz PSD reference Level**

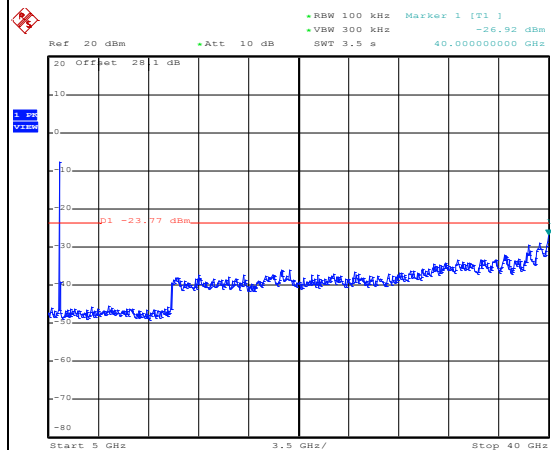
Date: 23.MAR.2014 14:33:07

**High Channel Plot**

Date: 23.MAR.2014 14:33:21

**Spurious Emission 30MHz~6GHz**

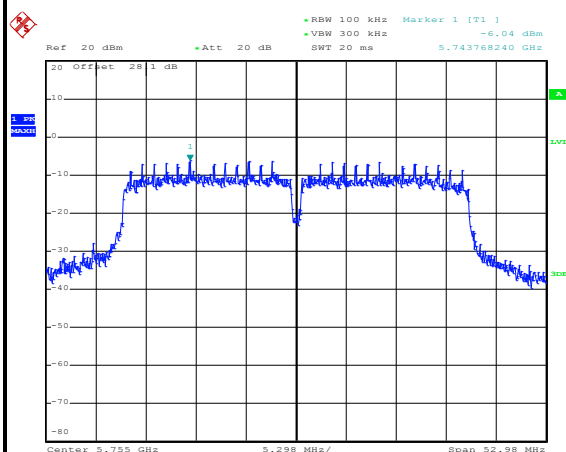
Date: 23.MAR.2014 14:33:40

**Spurious Emission 5GHz~40GHz**

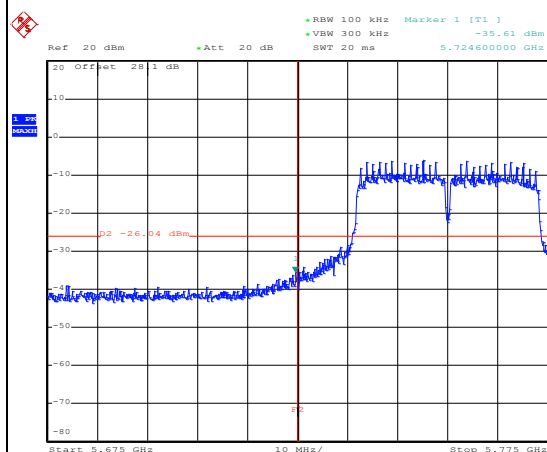
Date: 23.MAR.2014 14:33:59



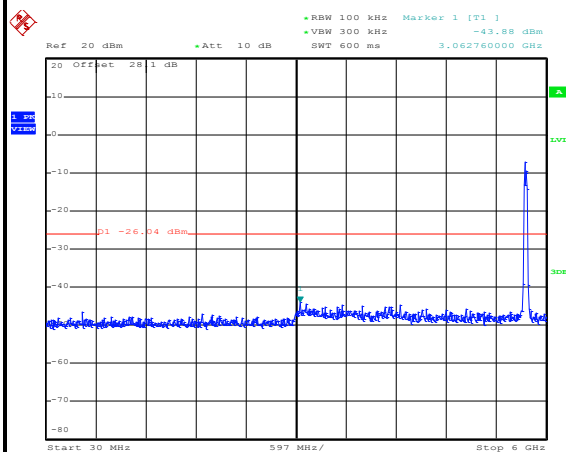
|                |                |                     |          |
|----------------|----------------|---------------------|----------|
| Test Mode :    | 802.11ac VHT40 | Temperature :       | 24~26°C  |
| Test Band :    | 5GHz Low       | Relative Humidity : | 50~53%   |
| Test Channel : | 151            | Test Engineer :     | Alex Lee |

**WLAN 802.11ac VHT40 Channel 151****100kHz PSD reference Level**

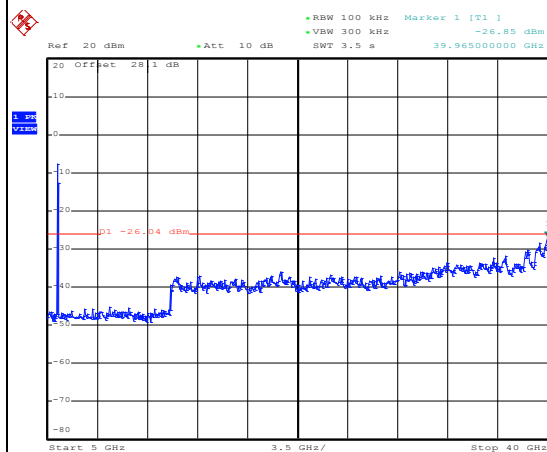
Date: 23.MAR.2014 14:37:33

**Low Channel Plot**

Date: 23.MAR.2014 14:37:47

**Spurious Emission 30MHz~6GHz**

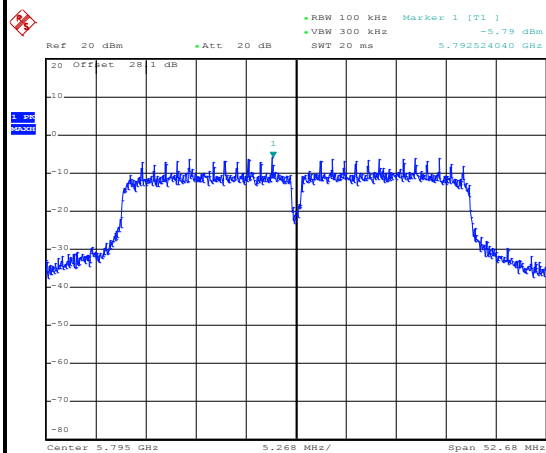
Date: 23.MAR.2014 14:38:06

**Spurious Emission 5GHz~40GHz**

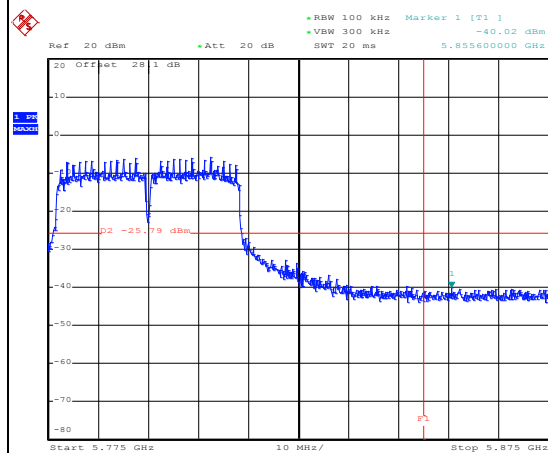
Date: 23.MAR.2014 14:38:24



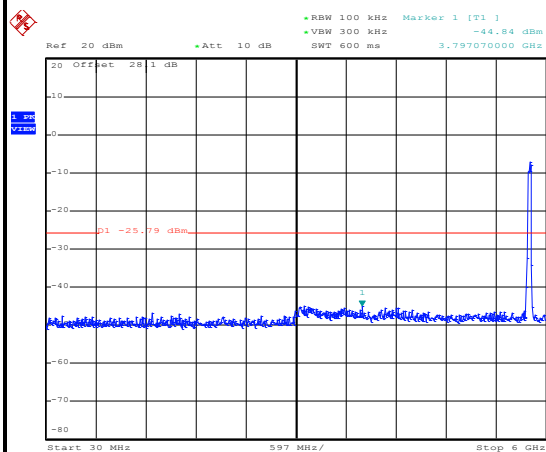
|                |                |                     |          |
|----------------|----------------|---------------------|----------|
| Test Mode :    | 802.11ac VHT40 | Temperature :       | 24~26°C  |
| Test Band :    | 5GHz High      | Relative Humidity : | 50~53%   |
| Test Channel : | 159            | Test Engineer :     | Alex Lee |

**WLAN 802.11ac VHT40 Channel 159****100kHz PSD reference Level**

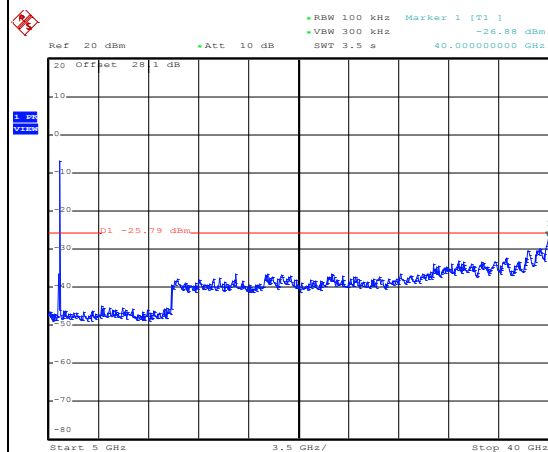
Date: 23.MAR.2014 14:41:56

**High Channel Plot**

Date: 23.MAR.2014 14:42:09

**Spurious Emission 30MHz~6GHz**

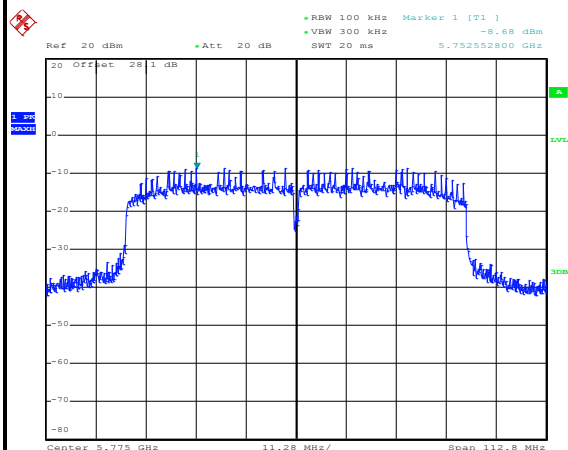
Date: 23.MAR.2014 14:42:29

**Spurious Emission 5GHz~40GHz**

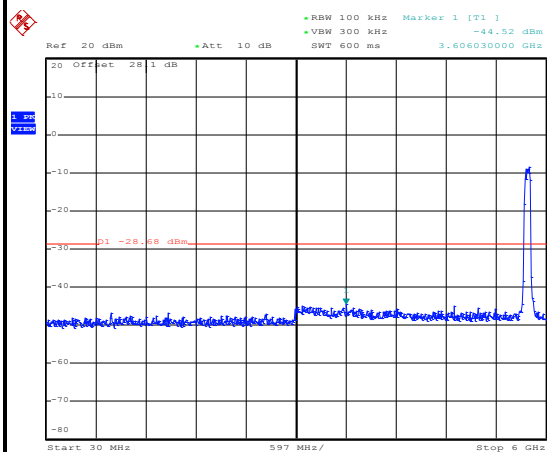
Date: 23.MAR.2014 14:42:47



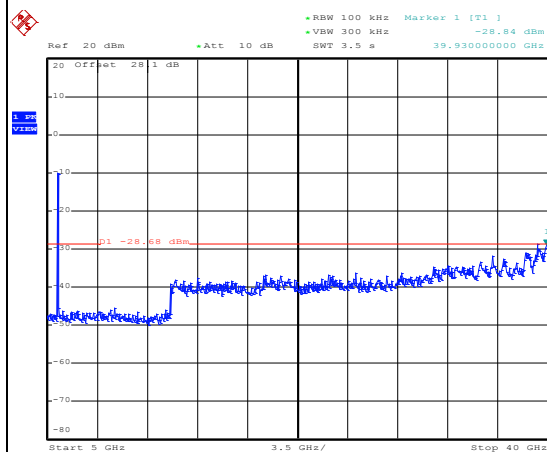
|                |                |                     |          |
|----------------|----------------|---------------------|----------|
| Test Mode :    | 802.11ac VHT80 | Temperature :       | 24~26°C  |
| Test Band :    | 5GHz           | Relative Humidity : | 50~53%   |
| Test Channel : | 155            | Test Engineer :     | Alex Lee |

**WLAN 802.11ac VHT80 Channel 155****100kHz PSD reference Level**

Date: 23.MAR.2014 15:02:23

**Spurious Emission 30MHz~6GHz**

Date: 23.MAR.2014 15:08:34

**Spurious Emission 5GHz~40GHz**

Date: 23.MAR.2014 15:10:34

### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

| Frequency<br>(MHz) | Field Strength<br>(microvolts/meter) | Measurement Distance<br>(meters) |
|--------------------|--------------------------------------|----------------------------------|
| 0.009 – 0.490      | 2400/F(kHz)                          | 300                              |
| 0.490 – 1.705      | 24000/F(kHz)                         | 30                               |
| 1.705 – 30.0       | 30                                   | 30                               |
| 30 – 88            | 100                                  | 3                                |
| 88 – 216           | 150                                  | 3                                |
| 216 - 960          | 200                                  | 3                                |
| Above 960          | 500                                  | 3                                |

#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.5.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamplifier Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz;  $VBW \geq RBW$ ; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.

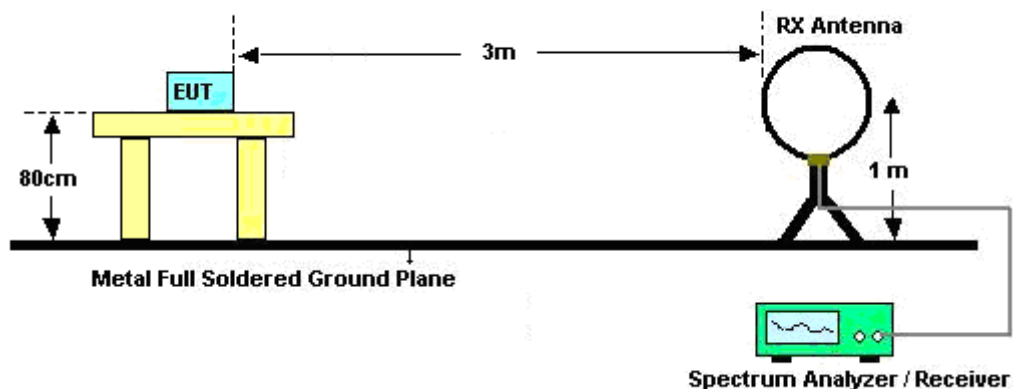
For average measurement:

  - $VBW = 10$  Hz, when duty cycle is no less than 98 percent.
  - $VBW \geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

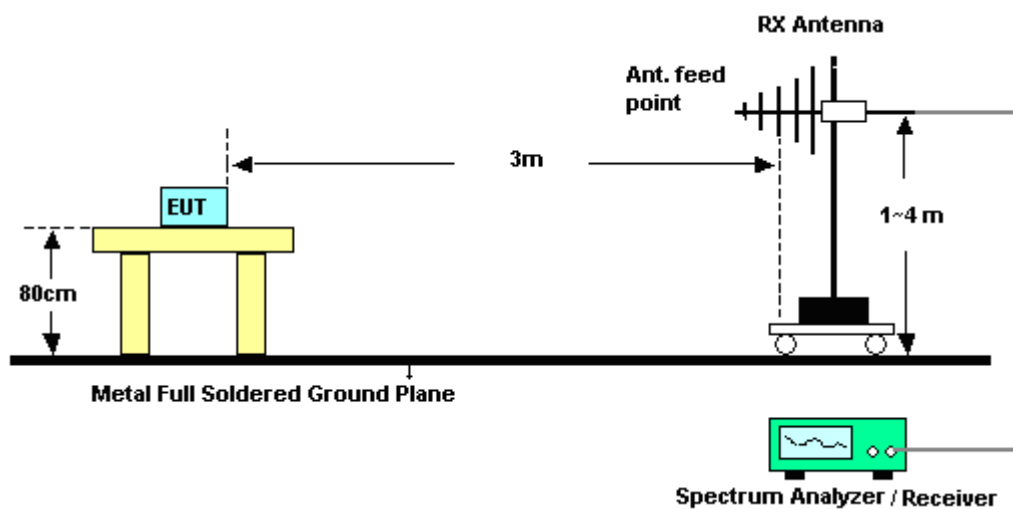
| Band                | Duty Cycle(%) | T(ms) | 1/T(kHz) | VBW Setting |
|---------------------|---------------|-------|----------|-------------|
| 802.11b             | 97.63         | 8.240 | 0.121    | 300Hz       |
| 802.11g             | 87.24         | 1.368 | 0.731    | 1kHz        |
| 2.4GHz 802.11n HT20 | 86.49         | 1.280 | 0.781    | 1kHz        |
| 802.11a             | 87.26         | 1.370 | 0.730    | 1kHz        |
| 5GHz 802.11n HT20   | 85.95         | 1.272 | 0.786    | 1kHz        |
| 5GHz 802.11n HT40   | 75.71         | 0.636 | 1.572    | 3kHz        |
| 5GHz 802.11ac VHT20 | 82.74         | 0.978 | 1.022    | 3kHz        |
| 5GHz 802.11ac VHT40 | 71.26         | 0.496 | 2.016    | 3kHz        |
| 5GHz 802.11ac VHT80 | 54.87         | 0.248 | 4.032    | 10kHz       |

### 3.5.4 Test Setup

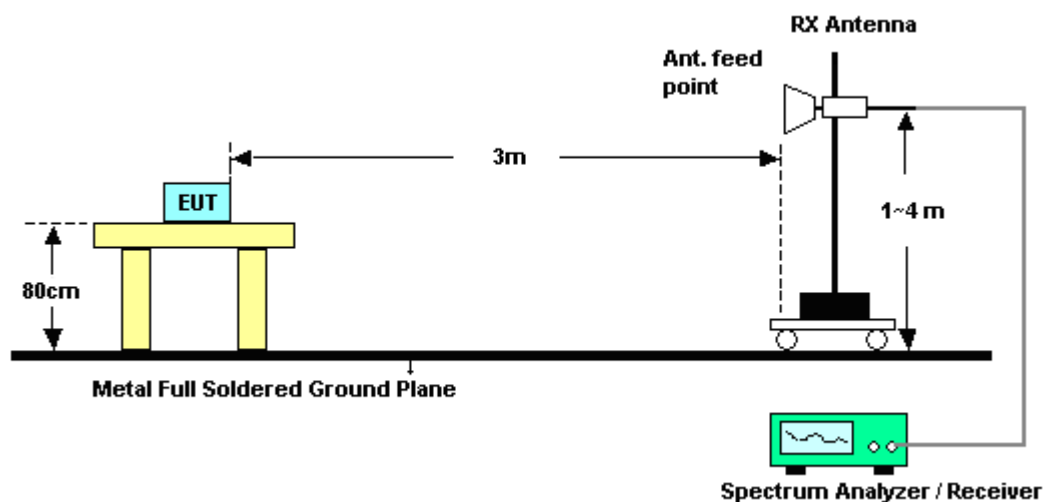
For radiated emissions below 30MHz



For radiated emissions from 30MHz to 1GHz



For radiated emissions above 1GHz



**3.5.5 Test Result of Radiated Spurious at Band Edges**

|                       |         |                            |          |
|-----------------------|---------|----------------------------|----------|
| <b>Test Mode :</b>    | 802.11b | <b>Temperature :</b>       | 25~26°C  |
| <b>Test Band :</b>    | Low     | <b>Relative Humidity :</b> | 44~45%   |
| <b>Test Channel :</b> | 01      | <b>Test Engineer :</b>     | Gavin Wu |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2388.39                       | 49.15               | -24.85                  | 74                          | 45.11                     | 31.92                       | 6.45                    | 34.33                      | 148                  | 32                      | Peak    |
| 2390                          | 38.29               | -15.71                  | 54                          | 34.25                     | 31.92                       | 6.45                    | 34.33                      | 148                  | 32                      | Average |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2352.12                     | 49.68               | -24.32                  | 74                          | 45.75                     | 31.89                       | 6.38                    | 34.34                      | 105                  | 109                     | Peak    |
| 2387.67                     | 38.44               | -15.56                  | 54                          | 34.4                      | 31.92                       | 6.45                    | 34.33                      | 105                  | 109                     | Average |

|                       |         |                            |          |
|-----------------------|---------|----------------------------|----------|
| <b>Test Mode :</b>    | 802.11b | <b>Temperature :</b>       | 25~26°C  |
| <b>Test Band :</b>    | High    | <b>Relative Humidity :</b> | 44~45%   |
| <b>Test Channel :</b> | 11      | <b>Test Engineer :</b>     | Gavin Wu |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2487.55                       | 49.64               | -24.36                  | 74                          | 45.35                     | 32                          | 6.59                    | 34.3                       | 143                  | 32                      | Peak    |
| 2483.71                       | 38.54               | -15.46                  | 54                          | 34.26                     | 31.99                       | 6.59                    | 34.3                       | 143                  | 32                      | Average |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2486.11                     | 51.85               | -22.15                  | 74                          | 47.57                     | 31.99                       | 6.59                    | 34.3                       | 100                  | 112                     | Peak    |
| 2483.56                     | 39.84               | -14.16                  | 54                          | 35.56                     | 31.99                       | 6.59                    | 34.3                       | 100                  | 112                     | Average |



|                |         |                     |          |
|----------------|---------|---------------------|----------|
| Test Mode :    | 802.11g | Temperature :       | 25~26°C  |
| Test Band :    | Low     | Relative Humidity : | 44~45%   |
| Test Channel : | 01      | Test Engineer :     | Gavin Wu |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2390                          | 63.84               | -10.16                  | 74                          | 59.8                      | 31.92                       | 6.45                    | 34.33                      | 127                  | 6                       | Peak    |
| 2390                          | 44.26               | -9.74                   | 54                          | 40.22                     | 31.92                       | 6.45                    | 34.33                      | 127                  | 6                       | Average |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2389.74                     | 60.62               | -13.38                  | 74                          | 56.58                     | 31.92                       | 6.45                    | 34.33                      | 100                  | 160                     | Peak    |
| 2390                        | 41.98               | -12.02                  | 54                          | 37.94                     | 31.92                       | 6.45                    | 34.33                      | 100                  | 160                     | Average |

|                |         |                     |          |
|----------------|---------|---------------------|----------|
| Test Mode :    | 802.11g | Temperature :       | 25~26°C  |
| Test Band :    | High    | Relative Humidity : | 44~45%   |
| Test Channel : | 11      | Test Engineer :     | Gavin Wu |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2484.34                       | 62.65               | -11.35                  | 74                          | 58.37                     | 31.99                       | 6.59                    | 34.3                       | 124                  | 39                      | Peak    |
| 2483.5                        | 43.51               | -10.49                  | 54                          | 39.23                     | 31.99                       | 6.59                    | 34.3                       | 124                  | 39                      | Average |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2483.83                     | 64.84               | -9.16                   | 74                          | 60.56                     | 31.99                       | 6.59                    | 34.3                       | 100                  | 149                     | Peak    |
| 2483.5                      | 44.76               | -9.24                   | 54                          | 40.48                     | 31.99                       | 6.59                    | 34.3                       | 100                  | 149                     | Average |



|                |                     |                     |          |
|----------------|---------------------|---------------------|----------|
| Test Mode :    | 2.4GHz 802.11n HT20 | Temperature :       | 25~26°C  |
| Test Band :    | Low                 | Relative Humidity : | 44~45%   |
| Test Channel : | 01                  | Test Engineer :     | Gavin Wu |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2389.74                       | 56.13               | -17.87                  | 74                          | 52.09                     | 31.92                       | 6.45                    | 34.33                      | 128                  | 8                       | Peak    |
| 2390                          | 41.16               | -12.84                  | 54                          | 37.12                     | 31.92                       | 6.45                    | 34.33                      | 128                  | 8                       | Average |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2390                        | 53.31               | -20.69                  | 74                          | 49.27                     | 31.92                       | 6.45                    | 34.33                      | 101                  | 163                     | Peak    |
| 2390                        | 39.86               | -14.14                  | 54                          | 35.82                     | 31.92                       | 6.45                    | 34.33                      | 101                  | 163                     | Average |

|                |                     |                     |          |
|----------------|---------------------|---------------------|----------|
| Test Mode :    | 2.4GHz 802.11n HT20 | Temperature :       | 25~26°C  |
| Test Band :    | High                | Relative Humidity : | 44~45%   |
| Test Channel : | 11                  | Test Engineer :     | Gavin Wu |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2483.98                       | 57.54               | -16.46                  | 74                          | 53.26                     | 31.99                       | 6.59                    | 34.3                       | 124                  | 4                       | Peak    |
| 2483.68                       | 40.68               | -13.32                  | 54                          | 36.4                      | 31.99                       | 6.59                    | 34.3                       | 124                  | 4                       | Average |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2485.45                     | 55.92               | -18.08                  | 74                          | 51.64                     | 31.99                       | 6.59                    | 34.3                       | 100                  | 149                     | Peak    |
| 2483.5                      | 40.49               | -13.51                  | 54                          | 36.21                     | 31.99                       | 6.59                    | 34.3                       | 100                  | 149                     | Average |

**<WLAN Tx Mode with WPC Charging>**

|                       |         |                            |          |
|-----------------------|---------|----------------------------|----------|
| <b>Test Mode :</b>    | 802.11g | <b>Temperature :</b>       | 25~26°C  |
| <b>Test Band :</b>    | High    | <b>Relative Humidity :</b> | 44~45%   |
| <b>Test Channel :</b> | 11      | <b>Test Engineer :</b>     | Gavin Wu |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2483.74                       | 61.89               | -12.11                  | 74                          | 57.61                     | 31.99                       | 6.59                    | 34.3                       | 170                  | 310                     | Peak    |
| 2483.59                       | 43.06               | -10.94                  | 54                          | 38.78                     | 31.99                       | 6.59                    | 34.3                       | 170                  | 310                     | Average |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>( dBμV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2483.56                     | 64.19               | -9.81                   | 74                          | 59.91                     | 31.99                       | 6.59                    | 34.3                       | 200                  | 208                     | Peak    |
| 2483.53                     | 44.9                | -9.1                    | 54                          | 40.62                     | 31.99                       | 6.59                    | 34.3                       | 200                  | 208                     | Average |

### 3.5.6 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

**Note:** Pre-scanned all test modes and only choose the worst case mode recorded in the test report for radiated spurious emission below 30MHz.

#### <WLAN Tx Mode with WPC Charging>

|                        |           |                            |            |
|------------------------|-----------|----------------------------|------------|
| <b>Test Mode :</b>     | 802.11g   | <b>Temperature :</b>       | 23~25°C    |
| <b>Test Channel :</b>  | 11        | <b>Relative Humidity :</b> | 43~45%     |
| <b>Test Engineer :</b> | Eric Shih | <b>Polarization :</b>      | Horizontal |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------|-------------------------|---------|
| 0.01798              | 36.91               | -85.6                   | 122.51                      | 16.36                   | 20.26                       | 0.29                    | -                    | -                       | Average |
| 0.08997              | 21.96               | -86.56                  | 108.52                      | 1.6                     | 20.07                       | 0.29                    | -                    | -                       | Average |
| 0.09668              | 22.89               | -85.01                  | 107.9                       | 2.53                    | 20.07                       | 0.29                    | -                    | -                       | QP      |
| 0.12604              | 22.32               | -83.27                  | 105.59                      | 1.97                    | 20.06                       | 0.29                    | -                    | -                       | Average |
| 0.17584              | 51.52               | -51.18                  | 102.7                       | 31.2                    | 20.03                       | 0.29                    | -                    | -                       | Average |
| 0.456                | 45.5                | -48.92                  | 94.42                       | 25.21                   | 20                          | 0.29                    | -                    | -                       | Average |
| 1.707                | 52.26               | -17.74                  | 70                          | 31.91                   | 20.02                       | 0.33                    | 100                  | 78                      | QP      |
| 12.04                | 36.71               | -33.29                  | 70                          | 16.54                   | 19.77                       | 0.4                     | -                    | -                       | QP      |
| 20.401               | 36.83               | -33.17                  | 70                          | 16.22                   | 20.18                       | 0.43                    | -                    | -                       | QP      |
| 27.26                | 36.25               | -33.75                  | 70                          | 15.39                   | 20.38                       | 0.48                    | -                    | -                       | QP      |



|                        |           |                            |          |
|------------------------|-----------|----------------------------|----------|
| <b>Test Mode :</b>     | 802.11g   | <b>Temperature :</b>       | 23~25°C  |
| <b>Test Channel :</b>  | 11        | <b>Relative Humidity :</b> | 43~45%   |
| <b>Test Engineer :</b> | Eric Shih | <b>Polarization :</b>      | Vertical |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------|-------------------------|---------|
| 0.01798              | 36.45               | -86.06                  | 122.51                      | 15.9                    | 20.26                       | 0.29                    | -                    | -                       | Average |
| 0.07005              | 23.37               | -87.33                  | 110.7                       | 2.97                    | 20.11                       | 0.29                    | -                    | -                       | Average |
| 0.09672              | 28.02               | -79.87                  | 107.89                      | 7.66                    | 20.07                       | 0.29                    | -                    | -                       | QP      |
| 0.14504              | 27.09               | -77.28                  | 104.37                      | 6.76                    | 20.04                       | 0.29                    | -                    | -                       | Average |
| 0.17652              | 47.48               | -55.19                  | 102.67                      | 27.16                   | 20.03                       | 0.29                    | -                    | -                       | Average |
| 0.26662              | 46.02               | -53.07                  | 99.09                       | 25.72                   | 20.01                       | 0.29                    | -                    | -                       | Average |
| 1.324                | 43.48               | -21.69                  | 65.17                       | 23.16                   | 20.01                       | 0.31                    | 100                  | 88                      | QP      |
| 14.76                | 36.43               | -33.57                  | 70                          | 16.26                   | 19.76                       | 0.41                    | -                    | -                       | QP      |
| 17.071               | 38.07               | -31.93                  | 70                          | 17.81                   | 19.84                       | 0.42                    | -                    | -                       | QP      |
| 25.79                | 36.54               | -33.46                  | 70                          | 15.68                   | 20.39                       | 0.47                    | -                    | -                       | QP      |



|                        |                   |                            |            |
|------------------------|-------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 5GHz 802.11n HT40 | <b>Temperature :</b>       | 23~25°C    |
| <b>Test Channel :</b>  | 151               | <b>Relative Humidity :</b> | 43~45%     |
| <b>Test Engineer :</b> | Eric Shih         | <b>Polarization :</b>      | Horizontal |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------|-------------------------|---------|
| 0.01798              | 36.23               | -86.28                  | 122.51                      | 15.68                   | 20.26                       | 0.29                    | -                    | -                       | Average |
| 0.06573              | 21.38               | -89.87                  | 111.25                      | 0.98                    | 20.11                       | 0.29                    | -                    | -                       | Average |
| 0.09666              | 23.24               | -84.66                  | 107.9                       | 2.88                    | 20.07                       | 0.29                    | -                    | -                       | QP      |
| 0.12352              | 22.59               | -83.18                  | 105.77                      | 2.24                    | 20.06                       | 0.29                    | -                    | -                       | Average |
| 0.17278              | 49.08               | -53.77                  | 102.85                      | 28.75                   | 20.04                       | 0.29                    | -                    | -                       | Average |
| 0.30368              | 38.93               | -59.03                  | 97.96                       | 18.63                   | 20.01                       | 0.29                    | -                    | -                       | Average |
| 0.51253              | 46.41               | -27                     | 73.41                       | 26.1                    | 20                          | 0.31                    | 100                  | 5                       | QP      |
| 10.512               | 35.72               | -34.28                  | 70                          | 15.56                   | 19.77                       | 0.39                    | -                    | -                       | QP      |
| 19.51                | 37.4                | -32.6                   | 70                          | 16.88                   | 20.09                       | 0.43                    | -                    | -                       | QP      |
| 26.955               | 35.2                | -34.8                   | 70                          | 14.33                   | 20.39                       | 0.48                    | -                    | -                       | QP      |



|                        |                   |                            |          |
|------------------------|-------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 5GHz 802.11n HT40 | <b>Temperature :</b>       | 23~25°C  |
| <b>Test Channel :</b>  | 151               | <b>Relative Humidity :</b> | 43~45%   |
| <b>Test Engineer :</b> | Eric Shih         | <b>Polarization :</b>      | Vertical |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------|-------------------------|---------|
| 0.01798              | 36.57               | -85.94                  | 122.51                      | 16.02                   | 20.26                       | 0.29                    | -                    | -                       | Average |
| 0.08076              | 23.45               | -86.01                  | 109.46                      | 3.05                    | 20.11                       | 0.29                    | -                    | -                       | Average |
| 0.0967               | 27.97               | -79.93                  | 107.9                       | 7.61                    | 20.07                       | 0.29                    | -                    | -                       | QP      |
| 0.14508              | 26.83               | -77.54                  | 104.37                      | 6.5                     | 20.04                       | 0.29                    | -                    | -                       | Average |
| 0.17618              | 47.14               | -55.55                  | 102.69                      | 26.82                   | 20.03                       | 0.29                    | -                    | -                       | Average |
| 0.3863               | 44.49               | -51.38                  | 95.87                       | 24.2                    | 20                          | 0.29                    | -                    | -                       | Average |
| 1.699                | 38.43               | -24.57                  | 63                          | 18.08                   | 20.02                       | 0.33                    | 100                  | 88                      | QP      |
| 9.432                | 34.74               | -35.26                  | 70                          | 14.61                   | 19.75                       | 0.38                    | -                    | -                       | QP      |
| 19.375               | 38.43               | -31.57                  | 70                          | 17.93                   | 20.07                       | 0.43                    | -                    | -                       | QP      |
| 29.015               | 36.44               | -33.56                  | 70                          | 15.7                    | 20.23                       | 0.51                    | -                    | -                       | QP      |

### 3.5.7 Test Result of Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)

**Note:** Pre-scanned all test modes and only choose the worst case mode recorded in the test report for radiated spurious emission below 1GHz.

|                        |                                                                                                                                                      |                            |            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 802.11b                                                                                                                                              | <b>Temperature :</b>       | 25~26°C    |
| <b>Test Channel :</b>  | 01                                                                                                                                                   | <b>Relative Humidity :</b> | 44~45%     |
| <b>Test Engineer :</b> | Gavin Wu                                                                                                                                             | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 2412 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 2412                 | 100.88              | -                       | -                           | 96.79                   | 31.93                       | 6.49                    | 34.33                      | 148                  | 32                      | Average |
| 2412                 | 106                 | -                       | -                           | 101.91                  | 31.93                       | 6.49                    | 34.33                      | 148                  | 32                      | Peak    |
| 4824                 | 48.29               | -25.71                  | 74                          | 59.31                   | 34.4                        | 10.17                   | 55.59                      | 100                  | 0                       | Peak    |

|                        |                                                                                                                                                      |                            |          |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 802.11b                                                                                                                                              | <b>Temperature :</b>       | 25~26°C  |
| <b>Test Channel :</b>  | 01                                                                                                                                                   | <b>Relative Humidity :</b> | 44~45%   |
| <b>Test Engineer :</b> | Gavin Wu                                                                                                                                             | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 2413 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 2413                 | 100.33              | -                       | -                           | 96.24                   | 31.93                       | 6.49                    | 34.33                      | 105                  | 109                     | Average |
| 2413                 | 104.88              | -                       | -                           | 100.79                  | 31.93                       | 6.49                    | 34.33                      | 105                  | 109                     | Peak    |
| 4824                 | 49.05               | -24.95                  | 74                          | 60.07                   | 34.4                        | 10.17                   | 55.59                      | 100                  | 0                       | Peak    |

|                        |                                                                                                                                                      |                            |            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 802.11b                                                                                                                                              | <b>Temperature :</b>       | 25~26°C    |
| <b>Test Channel :</b>  | 06                                                                                                                                                   | <b>Relative Humidity :</b> | 44~45%     |
| <b>Test Engineer :</b> | Gavin Wu                                                                                                                                             | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 2436 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 2436                 | 99.69               | -                       | -                           | 95.55                   | 31.94                       | 6.52                    | 34.32                      | 146                  | 30                      | Average |
| 2436                 | 104.93              | -                       | -                           | 100.79                  | 31.94                       | 6.52                    | 34.32                      | 146                  | 30                      | Peak    |
| 4875                 | 47.54               | -26.46                  | 74                          | 58.67                   | 34.37                       | 10.18                   | 55.68                      | 100                  | 0                       | Peak    |
| 7311                 | 49.84               | -24.16                  | 74                          | 59.57                   | 35.61                       | 10.94                   | 56.28                      | 100                  | 0                       | Peak    |

|                        |                                                                                                                                                      |                            |          |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 802.11b                                                                                                                                              | <b>Temperature :</b>       | 25~26°C  |
| <b>Test Channel :</b>  | 06                                                                                                                                                   | <b>Relative Humidity :</b> | 44~45%   |
| <b>Test Engineer :</b> | Gavin Wu                                                                                                                                             | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 2438 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 2438                 | 98.15               | -                       | -                           | 93.99                   | 31.96                       | 6.52                    | 34.32                      | 100                  | 110                     | Average |
| 2438                 | 103.19              | -                       | -                           | 99.03                   | 31.96                       | 6.52                    | 34.32                      | 100                  | 110                     | Peak    |
| 4875                 | 49.17               | -24.83                  | 74                          | 60.3                    | 34.37                       | 10.18                   | 55.68                      | 100                  | 0                       | Peak    |
| 7311                 | 48.61               | -25.39                  | 74                          | 58.34                   | 35.61                       | 10.94                   | 56.28                      | 100                  | 0                       | Peak    |

|                        |                                                                                                                                                      |                            |            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 802.11b                                                                                                                                              | <b>Temperature :</b>       | 25~26°C    |
| <b>Test Channel :</b>  | 11                                                                                                                                                   | <b>Relative Humidity :</b> | 44~45%     |
| <b>Test Engineer :</b> | Gavin Wu                                                                                                                                             | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 2463 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 187.14               | 27.44               | -16.06                  | 43.5                        | 48.68                   | 9.04                        | 1.47                    | 31.75                      | 100                  | 209                     | Peak    |
| 206.04               | 27.22               | -16.28                  | 43.5                        | 48.26                   | 9.15                        | 1.56                    | 31.75                      | -                    | -                       | Peak    |
| 262.2                | 28.48               | -17.52                  | 46                          | 44.7                    | 13.72                       | 1.79                    | 31.73                      | -                    | -                       | Peak    |
| 307                  | 26.68               | -19.32                  | 46                          | 43.13                   | 13.35                       | 1.93                    | 31.73                      | -                    | -                       | Peak    |
| 345.5                | 24.28               | -21.72                  | 46                          | 39.76                   | 14.25                       | 2.03                    | 31.76                      | -                    | -                       | Peak    |
| 529.6                | 24.67               | -21.33                  | 46                          | 35.82                   | 18.3                        | 2.52                    | 31.97                      | -                    | -                       | Peak    |
| 2463                 | 99.25               | -                       | -                           | 95.03                   | 31.97                       | 6.56                    | 34.31                      | 143                  | 32                      | Average |
| 2463                 | 104.07              | -                       | -                           | 99.85                   | 31.97                       | 6.56                    | 34.31                      | 143                  | 32                      | Peak    |
| 4923                 | 49.12               | -24.88                  | 74                          | 60.36                   | 34.34                       | 10.2                    | 55.78                      | 100                  | 0                       | Peak    |
| 7386                 | 49.42               | -24.58                  | 74                          | 59.05                   | 35.56                       | 10.92                   | 56.11                      | 100                  | 0                       | Peak    |

|                        |                                                                                                                                                      |                            |          |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 802.11b                                                                                                                                              | <b>Temperature :</b>       | 25~26°C  |
| <b>Test Channel :</b>  | 11                                                                                                                                                   | <b>Relative Humidity :</b> | 44~45%   |
| <b>Test Engineer :</b> | Gavin Wu                                                                                                                                             | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 2463 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 43.5                 | 29.51               | -10.49                  | 40                          | 50.28                   | 10.26                       | 0.76                    | 31.79                      | 100                  | 164                     | Peak    |
| 51.06                | 23.72               | -16.28                  | 40                          | 46.71                   | 7.98                        | 0.81                    | 31.78                      | -                    | -                       | Peak    |
| 152.04               | 22.23               | -21.27                  | 43.5                        | 42.11                   | 10.5                        | 1.37                    | 31.75                      | -                    | -                       | Peak    |
| 511.4                | 21.98               | -24.02                  | 46                          | 33.51                   | 17.91                       | 2.5                     | 31.94                      | -                    | -                       | Peak    |
| 634.6                | 23.85               | -22.15                  | 46                          | 33.39                   | 19.72                       | 2.79                    | 32.05                      | -                    | -                       | Peak    |
| 847.4                | 23.94               | -22.06                  | 46                          | 31.69                   | 20.78                       | 3.22                    | 31.75                      | -                    | -                       | Peak    |
| 2463                 | 98.91               | -                       | -                           | 94.69                   | 31.97                       | 6.56                    | 34.31                      | 100                  | 112                     | Average |
| 2463                 | 103.41              | -                       | -                           | 99.19                   | 31.97                       | 6.56                    | 34.31                      | 100                  | 112                     | Peak    |
| 4923                 | 48.29               | -25.71                  | 74                          | 59.53                   | 34.34                       | 10.2                    | 55.78                      | 100                  | 0                       | Peak    |
| 7386                 | 48.8                | -25.2                   | 74                          | 58.43                   | 35.56                       | 10.92                   | 56.11                      | 100                  | 0                       | Peak    |

|                        |                                                                                                                                                      |                            |            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 802.11g                                                                                                                                              | <b>Temperature :</b>       | 25~26°C    |
| <b>Test Channel :</b>  | 01                                                                                                                                                   | <b>Relative Humidity :</b> | 44~45%     |
| <b>Test Engineer :</b> | Gavin Wu                                                                                                                                             | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 2411 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 2411                 | 93.12               | -                       | -                           | 89.03                   | 31.93                       | 6.49                    | 34.33                      | 127                  | 6                       | Average |
| 2411                 | 103.5               | -                       | -                           | 99.41                   | 31.93                       | 6.49                    | 34.33                      | 127                  | 6                       | Peak    |
| 4824                 | 47.08               | -26.92                  | 74                          | 58.1                    | 34.4                        | 10.17                   | 55.59                      | 100                  | 0                       | Peak    |

|                        |                                                                                                                                                      |                            |          |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 802.11g                                                                                                                                              | <b>Temperature :</b>       | 25~26°C  |
| <b>Test Channel :</b>  | 01                                                                                                                                                   | <b>Relative Humidity :</b> | 44~45%   |
| <b>Test Engineer :</b> | Gavin Wu                                                                                                                                             | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 2411 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 2411                 | 91.58               | -                       | -                           | 87.49                   | 31.93                       | 6.49                    | 34.33                      | 100                  | 160                     | Average |
| 2411                 | 102.01              | -                       | -                           | 97.92                   | 31.93                       | 6.49                    | 34.33                      | 100                  | 160                     | Peak    |
| 4824                 | 47.4                | -26.6                   | 74                          | 58.42                   | 34.4                        | 10.17                   | 55.59                      | 100                  | 0                       | Peak    |

|                        |                                                                                                                                                      |                            |            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 802.11g                                                                                                                                              | <b>Temperature :</b>       | 25~26°C    |
| <b>Test Channel :</b>  | 06                                                                                                                                                   | <b>Relative Humidity :</b> | 44~45%     |
| <b>Test Engineer :</b> | Gavin Wu                                                                                                                                             | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 2436 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 2436                 | 93.28               | -                       | -                           | 89.14                   | 31.94                       | 6.52                    | 34.32                      | 127                  | 7                       | Average |
| 2436                 | 103.78              | -                       | -                           | 99.64                   | 31.94                       | 6.52                    | 34.32                      | 127                  | 7                       | Peak    |
| 4875                 | 47.87               | -26.13                  | 74                          | 59                      | 34.37                       | 10.18                   | 55.68                      | 100                  | 0                       | Peak    |
| 7311                 | 48.09               | -25.91                  | 74                          | 57.82                   | 35.61                       | 10.94                   | 56.28                      | 100                  | 0                       | Peak    |

|                        |                                                                                                                                                      |                            |          |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 802.11g                                                                                                                                              | <b>Temperature :</b>       | 25~26°C  |
| <b>Test Channel :</b>  | 06                                                                                                                                                   | <b>Relative Humidity :</b> | 44~45%   |
| <b>Test Engineer :</b> | Gavin Wu                                                                                                                                             | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 2436 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 2436                 | 90.95               | -                       | -                           | 86.81                   | 31.94                       | 6.52                    | 34.32                      | 100                  | 157                     | Average |
| 2436                 | 101.31              | -                       | -                           | 97.17                   | 31.94                       | 6.52                    | 34.32                      | 100                  | 157                     | Peak    |
| 4875                 | 46.98               | -27.02                  | 74                          | 58.11                   | 34.37                       | 10.18                   | 55.68                      | 100                  | 0                       | Peak    |
| 7311                 | 50.35               | -23.65                  | 74                          | 60.08                   | 35.61                       | 10.94                   | 56.28                      | 100                  | 0                       | Peak    |

|                        |                                                                                                                                                      |                            |            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 802.11g                                                                                                                                              | <b>Temperature :</b>       | 25~26°C    |
| <b>Test Channel :</b>  | 11                                                                                                                                                   | <b>Relative Humidity :</b> | 44~45%     |
| <b>Test Engineer :</b> | Gavin Wu                                                                                                                                             | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 2461 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 159.6                | 25.02               | -18.48                  | 43.5                        | 45.2                    | 10.1                        | 1.47                    | 31.75                      | -                    | -                       | Peak    |
| 198.75               | 26.68               | -16.82                  | 43.5                        | 47.72                   | 9.18                        | 1.53                    | 31.75                      | -                    | -                       | Peak    |
| 203.34               | 26.71               | -16.79                  | 43.5                        | 47.75                   | 9.16                        | 1.55                    | 31.75                      | 102                  | 249                     | Peak    |
| 303.5                | 25.85               | -20.15                  | 46                          | 42.38                   | 13.27                       | 1.92                    | 31.72                      | -                    | -                       | Peak    |
| 342                  | 24.16               | -21.84                  | 46                          | 39.8                    | 14.1                        | 2.02                    | 31.76                      | -                    | -                       | Peak    |
| 749.4                | 23.67               | -22.33                  | 46                          | 32.41                   | 20.2                        | 3.05                    | 31.99                      | -                    | -                       | Peak    |
| 2461                 | 91.45               | -                       | -                           | 87.23                   | 31.97                       | 6.56                    | 34.31                      | 124                  | 39                      | Average |
| 2461                 | 102.02              | -                       | -                           | 97.8                    | 31.97                       | 6.56                    | 34.31                      | 124                  | 39                      | Peak    |
| 4923                 | 46.6                | -27.4                   | 74                          | 57.84                   | 34.34                       | 10.2                    | 55.78                      | 100                  | 0                       | Peak    |
| 7386                 | 48.63               | -25.37                  | 74                          | 58.26                   | 35.56                       | 10.92                   | 56.11                      | 100                  | 0                       | Peak    |

|                        |                                                                                                                                                      |                            |          |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 802.11g                                                                                                                                              | <b>Temperature :</b>       | 25~26°C  |
| <b>Test Channel :</b>  | 11                                                                                                                                                   | <b>Relative Humidity :</b> | 44~45%   |
| <b>Test Engineer :</b> | Gavin Wu                                                                                                                                             | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 2461 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 43.5                 | 28.97               | -11.03                  | 40                          | 49.74                   | 10.26                       | 0.76                    | 31.79                      | 100                  | 153                     | Peak    |
| 51.6                 | 23.29               | -16.71                  | 40                          | 46.28                   | 7.98                        | 0.81                    | 31.78                      | -                    | -                       | Peak    |
| 146.64               | 22.25               | -21.25                  | 43.5                        | 42.05                   | 10.62                       | 1.33                    | 31.75                      | -                    | -                       | Peak    |
| 301.4                | 20.63               | -25.37                  | 46                          | 37.2                    | 13.24                       | 1.91                    | 31.72                      | -                    | -                       | Peak    |
| 643                  | 23.28               | -22.72                  | 46                          | 32.95                   | 19.57                       | 2.8                     | 32.04                      | -                    | -                       | Peak    |
| 746.6                | 23.1                | -22.9                   | 46                          | 31.88                   | 20.17                       | 3.04                    | 31.99                      | -                    | -                       | Peak    |
| 2461                 | 89.87               | -                       | -                           | 85.65                   | 31.97                       | 6.56                    | 34.31                      | 100                  | 149                     | Average |
| 2461                 | 100.91              | -                       | -                           | 96.69                   | 31.97                       | 6.56                    | 34.31                      | 100                  | 149                     | Peak    |
| 4923                 | 47.43               | -26.57                  | 74                          | 58.67                   | 34.34                       | 10.2                    | 55.78                      | 100                  | 0                       | Peak    |
| 7386                 | 48.53               | -25.47                  | 74                          | 58.16                   | 35.56                       | 10.92                   | 56.11                      | 100                  | 0                       | Peak    |

|                        |                                                                                                                                                      |                            |            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 2.4GHz 802.11n HT20                                                                                                                                  | <b>Temperature :</b>       | 25~26°C    |
| <b>Test Channel :</b>  | 01                                                                                                                                                   | <b>Relative Humidity :</b> | 44~45%     |
| <b>Test Engineer :</b> | Gavin Wu                                                                                                                                             | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 2411 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 160.14               | 23.74               | -19.76                  | 43.5                        | 43.92                   | 10.1                        | 1.47                    | 31.75                      | -                    | -                       | Peak    |
| 188.76               | 25.69               | -17.81                  | 43.5                        | 46.88                   | 9.08                        | 1.48                    | 31.75                      | -                    | -                       | Peak    |
| 204.96               | 26.29               | -17.21                  | 43.5                        | 47.34                   | 9.15                        | 1.55                    | 31.75                      | 100                  | 225                     | Peak    |
| 310.5                | 25.18               | -20.82                  | 46                          | 41.57                   | 13.4                        | 1.94                    | 31.73                      | -                    | -                       | Peak    |
| 315.4                | 24.59               | -21.41                  | 46                          | 40.82                   | 13.55                       | 1.95                    | 31.73                      | -                    | -                       | Peak    |
| 345.5                | 23.36               | -22.64                  | 46                          | 38.84                   | 14.25                       | 2.03                    | 31.76                      | -                    | -                       | Peak    |
| 2411                 | 90.1                | -                       | -                           | 86.01                   | 31.93                       | 6.49                    | 34.33                      | 128                  | 8                       | Average |
| 2411                 | 100.58              | -                       | -                           | 96.49                   | 31.93                       | 6.49                    | 34.33                      | 128                  | 8                       | Peak    |
| 4824                 | 48.94               | -25.06                  | 74                          | 59.96                   | 34.4                        | 10.17                   | 55.59                      | 100                  | 0                       | Peak    |

|                        |                                                                                                                                                      |                            |          |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 2.4GHz 802.11n HT20                                                                                                                                  | <b>Temperature :</b>       | 25~26°C  |
| <b>Test Channel :</b>  | 01                                                                                                                                                   | <b>Relative Humidity :</b> | 44~45%   |
| <b>Test Engineer :</b> | Gavin Wu                                                                                                                                             | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 2411 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 42.96                | 28.18               | -11.82                  | 40                          | 48.3                    | 10.92                       | 0.75                    | 31.79                      | 100                  | 152                     | Peak    |
| 71.85                | 19.39               | -20.61                  | 40                          | 43.71                   | 6.5                         | 0.95                    | 31.77                      | -                    | -                       | Peak    |
| 198.75               | 21.81               | -21.69                  | 43.5                        | 42.85                   | 9.18                        | 1.53                    | 31.75                      | -                    | -                       | Peak    |
| 314                  | 20.84               | -25.16                  | 46                          | 37.1                    | 13.52                       | 1.95                    | 31.73                      | -                    | -                       | Peak    |
| 633.9                | 22.28               | -23.72                  | 46                          | 31.82                   | 19.72                       | 2.79                    | 32.05                      | -                    | -                       | Peak    |
| 650                  | 23.54               | -22.46                  | 46                          | 33.28                   | 19.5                        | 2.8                     | 32.04                      | -                    | -                       | Peak    |
| 2411                 | 88.15               | -                       | -                           | 84.06                   | 31.93                       | 6.49                    | 34.33                      | 101                  | 163                     | Average |
| 2411                 | 98.81               | -                       | -                           | 94.72                   | 31.93                       | 6.49                    | 34.33                      | 101                  | 163                     | Peak    |
| 4824                 | 47.45               | -26.55                  | 74                          | 58.47                   | 34.4                        | 10.17                   | 55.59                      | 100                  | 0                       | Peak    |

|                        |                                                                                                                                                      |                            |            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 2.4GHz 802.11n HT20                                                                                                                                  | <b>Temperature :</b>       | 25~26°C    |
| <b>Test Channel :</b>  | 06                                                                                                                                                   | <b>Relative Humidity :</b> | 44~45%     |
| <b>Test Engineer :</b> | Gavin Wu                                                                                                                                             | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 2436 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 2436                 | 87.66               | -                       | -                           | 83.52                   | 31.94                       | 6.52                    | 34.32                      | 129                  | 7                       | Average |
| 2436                 | 98.41               | -                       | -                           | 94.27                   | 31.94                       | 6.52                    | 34.32                      | 129                  | 7                       | Peak    |
| 4875                 | 47.51               | -26.49                  | 74                          | 58.64                   | 34.37                       | 10.18                   | 55.68                      | 100                  | 0                       | Peak    |
| 7311                 | 49.13               | -24.87                  | 74                          | 58.86                   | 35.61                       | 10.94                   | 56.28                      | 100                  | 0                       | Peak    |

|                        |                                                                                                                                                      |                            |          |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 2.4GHz 802.11n HT20                                                                                                                                  | <b>Temperature :</b>       | 25~26°C  |
| <b>Test Channel :</b>  | 06                                                                                                                                                   | <b>Relative Humidity :</b> | 44~45%   |
| <b>Test Engineer :</b> | Gavin Wu                                                                                                                                             | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 2436 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 2436                 | 86.52               | -                       | -                           | 82.38                   | 31.94                       | 6.52                    | 34.32                      | 100                  | 151                     | Average |
| 2436                 | 97.63               | -                       | -                           | 93.49                   | 31.94                       | 6.52                    | 34.32                      | 100                  | 151                     | Peak    |
| 4875                 | 47.26               | -26.74                  | 74                          | 58.39                   | 34.37                       | 10.18                   | 55.68                      | 100                  | 0                       | Peak    |
| 7311                 | 49.04               | -24.96                  | 74                          | 58.77                   | 35.61                       | 10.94                   | 56.28                      | 100                  | 0                       | Peak    |

|                        |                                                                                                                                                      |                            |            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 2.4GHz 802.11n HT20                                                                                                                                  | <b>Temperature :</b>       | 25~26°C    |
| <b>Test Channel :</b>  | 11                                                                                                                                                   | <b>Relative Humidity :</b> | 44~45%     |
| <b>Test Engineer :</b> | Gavin Wu                                                                                                                                             | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 2461 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 2461                 | 86.49               | -                       | -                           | 82.27                   | 31.97                       | 6.56                    | 34.31                      | 124                  | 4                       | Average |
| 2461                 | 97.39               | -                       | -                           | 93.17                   | 31.97                       | 6.56                    | 34.31                      | 124                  | 4                       | Peak    |
| 4923                 | 47.29               | -26.71                  | 74                          | 58.53                   | 34.34                       | 10.2                    | 55.78                      | 100                  | 0                       | Peak    |
| 7386                 | 48.45               | -25.55                  | 74                          | 58.08                   | 35.56                       | 10.92                   | 56.11                      | 100                  | 0                       | Peak    |

|                        |                                                                                                                                                      |                            |          |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 2.4GHz 802.11n HT20                                                                                                                                  | <b>Temperature :</b>       | 25~26°C  |
| <b>Test Channel :</b>  | 11                                                                                                                                                   | <b>Relative Humidity :</b> | 44~45%   |
| <b>Test Engineer :</b> | Gavin Wu                                                                                                                                             | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 2463 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 2463                 | 85.19               | -                       | -                           | 80.97                   | 31.97                       | 6.56                    | 34.31                      | 100                  | 149                     | Average |
| 2463                 | 96.74               | -                       | -                           | 92.52                   | 31.97                       | 6.56                    | 34.31                      | 100                  | 149                     | Peak    |
| 4923                 | 47.24               | -26.76                  | 74                          | 58.48                   | 34.34                       | 10.2                    | 55.78                      | 100                  | 0                       | Peak    |
| 7386                 | 48.69               | -25.31                  | 74                          | 58.32                   | 35.56                       | 10.92                   | 56.11                      | 100                  | 0                       | Peak    |

|                        |                                                                                                                                                      |                            |            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 802.11a                                                                                                                                              | <b>Temperature :</b>       | 25~26°C    |
| <b>Test Channel :</b>  | 149                                                                                                                                                  | <b>Relative Humidity :</b> | 44~45%     |
| <b>Test Engineer :</b> | Gavin Wu                                                                                                                                             | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 5744 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5744                 | 94.73               | -                       | -                           | 81.6                    | 35.04                       | 11.39                   | 33.3                       | 148                  | 280                     | Average |
| 5744                 | 105.08              | -                       | -                           | 91.95                   | 35.04                       | 11.39                   | 33.3                       | 148                  | 280                     | Peak    |
| 11490                | 49.85               | -24.15                  | 74                          | 54.85                   | 37.79                       | 11.04                   | 53.83                      | 100                  | 0                       | Peak    |

|                        |                                                                                                                                                      |                            |          |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 802.11a                                                                                                                                              | <b>Temperature :</b>       | 25~26°C  |
| <b>Test Channel :</b>  | 149                                                                                                                                                  | <b>Relative Humidity :</b> | 44~45%   |
| <b>Test Engineer :</b> | Gavin Wu                                                                                                                                             | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 5746 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5746                 | 98.09               | -                       | -                           | 84.96                   | 35.04                       | 11.39                   | 33.3                       | 100                  | 60                      | Average |
| 5746                 | 108.73              | -                       | -                           | 95.6                    | 35.04                       | 11.39                   | 33.3                       | 100                  | 60                      | Peak    |
| 11490                | 49.94               | -24.06                  | 74                          | 54.94                   | 37.79                       | 11.04                   | 53.83                      | 100                  | 0                       | Peak    |

|                        |                                                                                                                                                      |                            |            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 802.11a                                                                                                                                              | <b>Temperature :</b>       | 25~26°C    |
| <b>Test Channel :</b>  | 157                                                                                                                                                  | <b>Relative Humidity :</b> | 44~45%     |
| <b>Test Engineer :</b> | Gavin Wu                                                                                                                                             | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 5786 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5786                 | 95.49               | -                       | -                           | 82.29                   | 35.09                       | 11.43                   | 33.32                      | 147                  | 276                     | Average |
| 5786                 | 105.83              | -                       | -                           | 92.63                   | 35.09                       | 11.43                   | 33.32                      | 147                  | 276                     | Peak    |
| 11571                | 50.23               | -23.77                  | 74                          | 54.98                   | 37.92                       | 11.09                   | 53.76                      | 100                  | 0                       | Peak    |

|                        |                                                                                                                                                      |                            |          |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 802.11a                                                                                                                                              | <b>Temperature :</b>       | 25~26°C  |
| <b>Test Channel :</b>  | 157                                                                                                                                                  | <b>Relative Humidity :</b> | 44~45%   |
| <b>Test Engineer :</b> | Gavin Wu                                                                                                                                             | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 5784 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5784                 | 98.75               | -                       | -                           | 85.56                   | 35.08                       | 11.43                   | 33.32                      | 100                  | 59                      | Average |
| 5784                 | 108.92              | -                       | -                           | 95.73                   | 35.08                       | 11.43                   | 33.32                      | 100                  | 59                      | Peak    |
| 11571                | 50.06               | -23.94                  | 74                          | 54.81                   | 37.92                       | 11.09                   | 53.76                      | 100                  | 0                       | Peak    |

|                        |                                                                                                                                                      |                            |            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 802.11a                                                                                                                                              | <b>Temperature :</b>       | 25~26°C    |
| <b>Test Channel :</b>  | 165                                                                                                                                                  | <b>Relative Humidity :</b> | 44~45%     |
| <b>Test Engineer :</b> | Gavin Wu                                                                                                                                             | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 5824 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 182.55               | 26.18               | -17.32                  | 43.5                        | 47.29                   | 9.18                        | 1.46                    | 31.75                      | -                    | -                       | Peak    |
| 201.45               | 27.6                | -15.9                   | 43.5                        | 48.62                   | 9.18                        | 1.55                    | 31.75                      | 100                  | 277                     | Peak    |
| 275.16               | 28.34               | -17.66                  | 46                          | 45.35                   | 12.89                       | 1.83                    | 31.73                      | -                    | -                       | Peak    |
| 303.5                | 26.17               | -19.83                  | 46                          | 42.7                    | 13.27                       | 1.92                    | 31.72                      | -                    | -                       | Peak    |
| 310.5                | 25.63               | -20.37                  | 46                          | 42.02                   | 13.4                        | 1.94                    | 31.73                      | -                    | -                       | Peak    |
| 345.5                | 24.43               | -21.57                  | 46                          | 39.91                   | 14.25                       | 2.03                    | 31.76                      | -                    | -                       | Peak    |
| 5824                 | 95.69               | -                       | -                           | 82.38                   | 35.13                       | 11.51                   | 33.33                      | 172                  | 284                     | Average |
| 5824                 | 105.84              | -                       | -                           | 92.53                   | 35.13                       | 11.51                   | 33.33                      | 172                  | 284                     | Peak    |
| 11649                | 50.92               | -23.08                  | 74                          | 55.45                   | 38.05                       | 11.14                   | 53.72                      | 100                  | 0                       | Peak    |

|                        |                                                                                                                                                      |                            |          |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 802.11a                                                                                                                                              | <b>Temperature :</b>       | 25~26°C  |
| <b>Test Channel :</b>  | 165                                                                                                                                                  | <b>Relative Humidity :</b> | 44~45%   |
| <b>Test Engineer :</b> | Gavin Wu                                                                                                                                             | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 5826 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 42.96                | 28.27               | -11.73                  | 40                          | 48.39                   | 10.92                       | 0.75                    | 31.79                      | 102                  | 172                     | Peak    |
| 51.06                | 22.57               | -17.43                  | 40                          | 45.56                   | 7.98                        | 0.81                    | 31.78                      | -                    | -                       | Peak    |
| 153.66               | 22.87               | -20.63                  | 43.5                        | 42.84                   | 10.4                        | 1.38                    | 31.75                      | -                    | -                       | Peak    |
| 310.5                | 22.97               | -23.03                  | 46                          | 39.36                   | 13.4                        | 1.94                    | 31.73                      | -                    | -                       | Peak    |
| 391                  | 19.89               | -26.11                  | 46                          | 34.01                   | 15.53                       | 2.16                    | 31.81                      | -                    | -                       | Peak    |
| 639.5                | 23.62               | -22.38                  | 46                          | 33.25                   | 19.62                       | 2.79                    | 32.04                      | -                    | -                       | Peak    |
| 5826                 | 98.61               | -                       | -                           | 85.3                    | 35.13                       | 11.51                   | 33.33                      | 100                  | 50                      | Average |
| 5826                 | 108.99              | -                       | -                           | 95.68                   | 35.13                       | 11.51                   | 33.33                      | 100                  | 50                      | Peak    |
| 11649                | 49.91               | -24.09                  | 74                          | 54.44                   | 38.05                       | 11.14                   | 53.72                      | 100                  | 0                       | Peak    |

|                        |                                                                                                                                                      |                            |            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 5GHz 802.11n HT20                                                                                                                                    | <b>Temperature :</b>       | 25~26°C    |
| <b>Test Channel :</b>  | 149                                                                                                                                                  | <b>Relative Humidity :</b> | 44~45%     |
| <b>Test Engineer :</b> | Gavin Wu                                                                                                                                             | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 5746 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5746                 | 95.49               | -                       | -                           | 82.36                   | 35.04                       | 11.39                   | 33.3                       | 174                  | 284                     | Average |
| 5746                 | 105.89              | -                       | -                           | 92.76                   | 35.04                       | 11.39                   | 33.3                       | 174                  | 284                     | Peak    |
| 11490                | 50.56               | -23.44                  | 74                          | 55.56                   | 37.79                       | 11.04                   | 53.83                      | 100                  | 0                       | Peak    |

|                        |                                                                                                                                                      |                            |          |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 5GHz 802.11n HT20                                                                                                                                    | <b>Temperature :</b>       | 25~26°C  |
| <b>Test Channel :</b>  | 149                                                                                                                                                  | <b>Relative Humidity :</b> | 44~45%   |
| <b>Test Engineer :</b> | Gavin Wu                                                                                                                                             | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 5746 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5746                 | 98.44               | -                       | -                           | 85.31                   | 35.04                       | 11.39                   | 33.3                       | 100                  | 59                      | Average |
| 5746                 | 108.87              | -                       | -                           | 95.74                   | 35.04                       | 11.39                   | 33.3                       | 100                  | 59                      | Peak    |
| 11490                | 49.7                | -24.3                   | 74                          | 54.7                    | 37.79                       | 11.04                   | 53.83                      | 100                  | 0                       | Peak    |

|                        |                                                                                                                                                      |                            |            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 5GHz 802.11n HT20                                                                                                                                    | <b>Temperature :</b>       | 25~26°C    |
| <b>Test Channel :</b>  | 157                                                                                                                                                  | <b>Relative Humidity :</b> | 44~45%     |
| <b>Test Engineer :</b> | Gavin Wu                                                                                                                                             | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 5786 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 182.55               | 26.19               | -17.31                  | 43.5                        | 47.3                    | 9.18                        | 1.46                    | 31.75                      | -                    | -                       | Peak    |
| 201.45               | 27.19               | -16.31                  | 43.5                        | 48.21                   | 9.18                        | 1.55                    | 31.75                      | 101                  | 258                     | Peak    |
| 285.15               | 27.72               | -18.28                  | 46                          | 44.69                   | 12.9                        | 1.85                    | 31.72                      | -                    | -                       | Peak    |
| 303.5                | 25.94               | -20.06                  | 46                          | 42.47                   | 13.27                       | 1.92                    | 31.72                      | -                    | -                       | Peak    |
| 342                  | 24.14               | -21.86                  | 46                          | 39.78                   | 14.1                        | 2.02                    | 31.76                      | -                    | -                       | Peak    |
| 384                  | 20.82               | -25.18                  | 46                          | 35.22                   | 15.26                       | 2.14                    | 31.8                       | -                    | -                       | Peak    |
| 5786                 | 95.18               | -                       | -                           | 81.98                   | 35.09                       | 11.43                   | 33.32                      | 146                  | 281                     | Average |
| 5786                 | 105.37              | -                       | -                           | 92.17                   | 35.09                       | 11.43                   | 33.32                      | 146                  | 281                     | Peak    |
| 11571                | 50.9                | -23.1                   | 74                          | 55.65                   | 37.92                       | 11.09                   | 53.76                      | 100                  | 0                       | Peak    |

|                        |                                                                                                                                                      |                            |          |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 5GHz 802.11n HT20                                                                                                                                    | <b>Temperature :</b>       | 25~26°C  |
| <b>Test Channel :</b>  | 157                                                                                                                                                  | <b>Relative Humidity :</b> | 44~45%   |
| <b>Test Engineer :</b> | Gavin Wu                                                                                                                                             | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 5786 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 43.5                 | 28.35               | -11.65                  | 40                          | 49.12                   | 10.26                       | 0.76                    | 31.79                      | 100                  | 182                     | Peak    |
| 48.9                 | 23.07               | -16.93                  | 40                          | 45.33                   | 8.73                        | 0.79                    | 31.78                      | -                    | -                       | Peak    |
| 152.85               | 22.7                | -20.8                   | 43.5                        | 42.67                   | 10.4                        | 1.38                    | 31.75                      | -                    | -                       | Peak    |
| 303.5                | 23.7                | -22.3                   | 46                          | 40.23                   | 13.27                       | 1.92                    | 31.72                      | -                    | -                       | Peak    |
| 387.5                | 22.01               | -23.99                  | 46                          | 36.25                   | 15.42                       | 2.15                    | 31.81                      | -                    | -                       | Peak    |
| 643                  | 23.94               | -22.06                  | 46                          | 33.61                   | 19.57                       | 2.8                     | 32.04                      | -                    | -                       | Peak    |
| 5786                 | 98.11               | -                       | -                           | 84.91                   | 35.09                       | 11.43                   | 33.32                      | 100                  | 49                      | Average |
| 5786                 | 108.42              | -                       | -                           | 95.22                   | 35.09                       | 11.43                   | 33.32                      | 100                  | 49                      | Peak    |
| 11571                | 50.67               | -23.33                  | 74                          | 55.42                   | 37.92                       | 11.09                   | 53.76                      | 100                  | 0                       | Peak    |

|                        |                                                                                                                                                      |                            |            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 5GHz 802.11n HT20                                                                                                                                    | <b>Temperature :</b>       | 25~26°C    |
| <b>Test Channel :</b>  | 165                                                                                                                                                  | <b>Relative Humidity :</b> | 44~45%     |
| <b>Test Engineer :</b> | Gavin Wu                                                                                                                                             | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 5826 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5826                 | 95.76               | -                       | -                           | 82.45                   | 35.13                       | 11.51                   | 33.33                      | 146                  | 283                     | Average |
| 5826                 | 106                 | -                       | -                           | 92.69                   | 35.13                       | 11.51                   | 33.33                      | 146                  | 283                     | Peak    |
| 11649                | 49.78               | -24.22                  | 74                          | 54.31                   | 38.05                       | 11.14                   | 53.72                      | 100                  | 0                       | Peak    |

|                        |                                                                                                                                                      |                            |          |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 5GHz 802.11n HT20                                                                                                                                    | <b>Temperature :</b>       | 25~26°C  |
| <b>Test Channel :</b>  | 165                                                                                                                                                  | <b>Relative Humidity :</b> | 44~45%   |
| <b>Test Engineer :</b> | Gavin Wu                                                                                                                                             | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 5824 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5824                 | 98.42               | -                       | -                           | 85.11                   | 35.13                       | 11.51                   | 33.33                      | 100                  | 62                      | Average |
| 5824                 | 108.58              | -                       | -                           | 95.27                   | 35.13                       | 11.51                   | 33.33                      | 100                  | 62                      | Peak    |
| 11649                | 49.87               | -24.13                  | 74                          | 54.4                    | 38.05                       | 11.14                   | 53.72                      | 100                  | 0                       | Peak    |

|                        |                                                                                                                                                      |                            |            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 5GHz 802.11n HT40                                                                                                                                    | <b>Temperature :</b>       | 25~26°C    |
| <b>Test Channel :</b>  | 151                                                                                                                                                  | <b>Relative Humidity :</b> | 44~45%     |
| <b>Test Engineer :</b> | Gavin Wu                                                                                                                                             | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 5757 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 182.55               | 25.02               | -18.48                  | 43.5                        | 46.13                   | 9.18                        | 1.46                    | 31.75                      | -                    | -                       | Peak    |
| 201.45               | 28.36               | -15.14                  | 43.5                        | 49.38                   | 9.18                        | 1.55                    | 31.75                      | 102                  | 226                     | Peak    |
| 281.64               | 28.52               | -17.48                  | 46                          | 45.59                   | 12.82                       | 1.84                    | 31.73                      | -                    | -                       | Peak    |
| 303.5                | 27.7                | -18.3                   | 46                          | 44.23                   | 13.27                       | 1.92                    | 31.72                      | -                    | -                       | Peak    |
| 345.5                | 24.71               | -21.29                  | 46                          | 40.19                   | 14.25                       | 2.03                    | 31.76                      | -                    | -                       | Peak    |
| 653.5                | 23.28               | -22.72                  | 46                          | 33.05                   | 19.46                       | 2.81                    | 32.04                      | -                    | -                       | Peak    |
| 5757                 | 93.79               | -                       | -                           | 80.65                   | 35.06                       | 11.39                   | 33.31                      | 159                  | 283                     | Average |
| 5757                 | 103.65              | -                       | -                           | 90.51                   | 35.06                       | 11.39                   | 33.31                      | 159                  | 283                     | Peak    |
| 11511                | 50.08               | -23.92                  | 74                          | 55.02                   | 37.8                        | 11.06                   | 53.8                       | 100                  | 0                       | Peak    |

|                        |                                                                                                                                                      |                            |          |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 5GHz 802.11n HT40                                                                                                                                    | <b>Temperature :</b>       | 25~26°C  |
| <b>Test Channel :</b>  | 151                                                                                                                                                  | <b>Relative Humidity :</b> | 44~45%   |
| <b>Test Engineer :</b> | Gavin Wu                                                                                                                                             | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 5753 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 43.5                 | 28.59               | -11.41                  | 40                          | 49.36                   | 10.26                       | 0.76                    | 31.79                      | 100                  | 153                     | Peak    |
| 155.55               | 22.81               | -20.69                  | 43.5                        | 42.96                   | 10.2                        | 1.4                     | 31.75                      | -                    | -                       | Peak    |
| 201.45               | 23.21               | -20.29                  | 43.5                        | 44.23                   | 9.18                        | 1.55                    | 31.75                      | -                    | -                       | Peak    |
| 627.6                | 22.54               | -23.46                  | 46                          | 32.05                   | 19.75                       | 2.79                    | 32.05                      | -                    | -                       | Peak    |
| 643                  | 24.4                | -21.6                   | 46                          | 34.07                   | 19.57                       | 2.8                     | 32.04                      | -                    | -                       | Peak    |
| 881                  | 24.07               | -21.93                  | 46                          | 31.46                   | 20.9                        | 3.32                    | 31.61                      | -                    | -                       | Peak    |
| 5753                 | 96.97               | -                       | -                           | 83.82                   | 35.06                       | 11.39                   | 33.3                       | 100                  | 60                      | Average |
| 5753                 | 107.09              | -                       | -                           | 93.94                   | 35.06                       | 11.39                   | 33.3                       | 100                  | 60                      | Peak    |
| 11511                | 50.96               | -23.04                  | 74                          | 55.9                    | 37.8                        | 11.06                   | 53.8                       | 100                  | 0                       | Peak    |

|                        |                                                                                                                                                      |                            |            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 5GHz 802.11n HT40                                                                                                                                    | <b>Temperature :</b>       | 25~26°C    |
| <b>Test Channel :</b>  | 159                                                                                                                                                  | <b>Relative Humidity :</b> | 44~45%     |
| <b>Test Engineer :</b> | Gavin Wu                                                                                                                                             | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 5797 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5797                 | 93.87               | -                       | -                           | 80.63                   | 35.09                       | 11.47                   | 33.32                      | 158                  | 283                     | Average |
| 5797                 | 103.54              | -                       | -                           | 90.3                    | 35.09                       | 11.47                   | 33.32                      | 158                  | 283                     | Peak    |
| 11589                | 50.28               | -23.72                  | 74                          | 54.97                   | 37.96                       | 11.1                    | 53.75                      | 100                  | 0                       | Peak    |

|                        |                                                                                                                                                      |                            |          |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 5GHz 802.11n HT40                                                                                                                                    | <b>Temperature :</b>       | 25~26°C  |
| <b>Test Channel :</b>  | 159                                                                                                                                                  | <b>Relative Humidity :</b> | 44~45%   |
| <b>Test Engineer :</b> | Gavin Wu                                                                                                                                             | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 5793 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 5793                 | 96.53               | -                       | -                           | 83.29                   | 35.09                       | 11.47                   | 33.32                      | 100                  | 60                      | Average |
| 5793                 | 106.27              | -                       | -                           | 93.03                   | 35.09                       | 11.47                   | 33.32                      | 100                  | 60                      | Peak    |
| 11589                | 50.67               | -23.33                  | 74                          | 55.36                   | 37.96                       | 11.1                    | 53.75                      | 100                  | 0                       | Peak    |

|                        |                                                                                                                                                      |                            |            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 5GHz 802.11ac VHT80                                                                                                                                  | <b>Temperature :</b>       | 25~26°C    |
| <b>Test Channel :</b>  | 155                                                                                                                                                  | <b>Relative Humidity :</b> | 44~45%     |
| <b>Test Engineer :</b> | Gavin Wu                                                                                                                                             | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 5773 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 192                  | 26.54               | -16.96                  | 43.5                        | 47.7                    | 9.1                         | 1.49                    | 31.75                      | -                    | -                       | Peak    |
| 201.45               | 27.7                | -15.8                   | 43.5                        | 48.72                   | 9.18                        | 1.55                    | 31.75                      | 100                  | 264                     | Peak    |
| 210.9                | 27.27               | -16.23                  | 43.5                        | 48.35                   | 9.1                         | 1.57                    | 31.75                      | -                    | -                       | Peak    |
| 307                  | 27.47               | -18.53                  | 46                          | 43.92                   | 13.35                       | 1.93                    | 31.73                      | -                    | -                       | Peak    |
| 345.5                | 23.6                | -22.4                   | 46                          | 39.08                   | 14.25                       | 2.03                    | 31.76                      | -                    | -                       | Peak    |
| 384                  | 22.28               | -23.72                  | 46                          | 36.68                   | 15.26                       | 2.14                    | 31.8                       | -                    | -                       | Peak    |
| 5773                 | 86.93               | -                       | -                           | 73.73                   | 35.08                       | 11.43                   | 33.31                      | 183                  | 335                     | Average |
| 5773                 | 96.29               | -                       | -                           | 83.09                   | 35.08                       | 11.43                   | 33.31                      | 183                  | 335                     | Peak    |
| 11550                | 50.04               | -23.96                  | 74                          | 54.83                   | 37.89                       | 11.09                   | 53.77                      | 100                  | 0                       | Peak    |

|                        |                                                                                                                                                      |                            |          |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 5GHz 802.11ac VHT80                                                                                                                                  | <b>Temperature :</b>       | 25~26°C  |
| <b>Test Channel :</b>  | 155                                                                                                                                                  | <b>Relative Humidity :</b> | 44~45%   |
| <b>Test Engineer :</b> | Gavin Wu                                                                                                                                             | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 5773 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 42.15                | 28.82               | -11.18                  | 40                          | 48.94                   | 10.92                       | 0.75                    | 31.79                      | 100                  | 231                     | Peak    |
| 51.33                | 22.64               | -17.36                  | 40                          | 45.63                   | 7.98                        | 0.81                    | 31.78                      | -                    | -                       | Peak    |
| 152.04               | 23.96               | -19.54                  | 43.5                        | 43.84                   | 10.5                        | 1.37                    | 31.75                      | -                    | -                       | Peak    |
| 310.5                | 21.05               | -24.95                  | 46                          | 37.44                   | 13.4                        | 1.94                    | 31.73                      | -                    | -                       | Peak    |
| 562.5                | 20.92               | -25.08                  | 46                          | 31.03                   | 19.3                        | 2.6                     | 32.01                      | -                    | -                       | Peak    |
| 636                  | 24.53               | -21.47                  | 46                          | 34.11                   | 19.68                       | 2.79                    | 32.05                      | -                    | -                       | Peak    |
| 5773                 | 89.72               | -                       | -                           | 76.52                   | 35.08                       | 11.43                   | 33.31                      | 100                  | 59                      | Average |
| 5773                 | 99.53               | -                       | -                           | 86.33                   | 35.08                       | 11.43                   | 33.31                      | 100                  | 59                      | Peak    |
| 11550                | 50.24               | -23.76                  | 74                          | 55.03                   | 37.89                       | 11.09                   | 53.77                      | 100                  | 0                       | Peak    |

**<WLAN Tx Mode with WPC Charging>**

|                        |                                                                                                                                                      |                            |            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 802.11g                                                                                                                                              | <b>Temperature :</b>       | 25~26°C    |
| <b>Test Channel :</b>  | 11                                                                                                                                                   | <b>Relative Humidity :</b> | 44~45%     |
| <b>Test Engineer :</b> | Gavin Wu                                                                                                                                             | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 2464 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 121.53               | 25.23               | -18.27                  | 43.5                        | 43.59                   | 12.16                       | 1.23                    | 31.75                      | -                    | -                       | Peak    |
| 135.84               | 24.93               | -18.57                  | 43.5                        | 43.89                   | 11.5                        | 1.29                    | 31.75                      | -                    | -                       | Peak    |
| 187.14               | 25.84               | -17.66                  | 43.5                        | 47.08                   | 9.04                        | 1.47                    | 31.75                      | -                    | -                       | Peak    |
| 304.2                | 33.07               | -12.93                  | 46                          | 49.58                   | 13.29                       | 1.92                    | 31.72                      | 106                  | 109                     | Peak    |
| 391                  | 23.59               | -22.41                  | 46                          | 37.71                   | 15.53                       | 2.16                    | 31.81                      | -                    | -                       | Peak    |
| 620.6                | 22.09               | -23.91                  | 46                          | 31.74                   | 19.62                       | 2.78                    | 32.05                      | -                    | -                       | Peak    |
| 2464                 | 90.76               | -                       | -                           | 86.87                   | 31.97                       | 6.56                    | 34.64                      | 170                  | 310                     | Average |
| 2464                 | 101.17              | -                       | -                           | 97.28                   | 31.97                       | 6.56                    | 34.64                      | 170                  | 310                     | Peak    |
| 4923                 | 40.13               | -33.87                  | 74                          | 56.16                   | 34.34                       | 10.2                    | 60.57                      | 100                  | 0                       | Peak    |
| 7386                 | 41.41               | -32.59                  | 74                          | 55.49                   | 35.56                       | 10.92                   | 60.56                      | 100                  | 0                       | Peak    |

|                        |                                                                                                                                                      |                            |          |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 802.11g                                                                                                                                              | <b>Temperature :</b>       | 25~26°C  |
| <b>Test Channel :</b>  | 11                                                                                                                                                   | <b>Relative Humidity :</b> | 44~45%   |
| <b>Test Engineer :</b> | Gavin Wu                                                                                                                                             | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 2464 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 50.52                | 28.58               | -11.42                  | 40                          | 51.26                   | 8.3                         | 0.8                     | 31.78                      | -                    | -                       | Peak    |
| 75.09                | 29.44               | -10.56                  | 40                          | 53.75                   | 6.5                         | 0.96                    | 31.77                      | -                    | -                       | Peak    |
| 87.24                | 30.16               | -9.84                   | 40                          | 52.76                   | 8.12                        | 1.04                    | 31.76                      | 101                  | 102                     | Peak    |
| 448.4                | 24.64               | -21.36                  | 46                          | 37.32                   | 16.88                       | 2.31                    | 31.87                      | -                    | -                       | Peak    |
| 634.6                | 22.58               | -23.42                  | 46                          | 32.12                   | 19.72                       | 2.79                    | 32.05                      | -                    | -                       | Peak    |
| 723.5                | 22.77               | -23.23                  | 46                          | 31.93                   | 19.87                       | 2.97                    | 32                         | -                    | -                       | Peak    |
| 2464                 | 92                  | -                       | -                           | 88.11                   | 31.97                       | 6.56                    | 34.64                      | 200                  | 208                     | Average |
| 2464                 | 102.64              | -                       | -                           | 98.75                   | 31.97                       | 6.56                    | 34.64                      | 200                  | 208                     | Peak    |
| 4923                 | 40.02               | -33.98                  | 74                          | 56.05                   | 34.34                       | 10.2                    | 60.57                      | 100                  | 0                       | Peak    |
| 7386                 | 42.07               | -31.93                  | 74                          | 56.15                   | 35.56                       | 10.92                   | 60.56                      | 100                  | 0                       | Peak    |

|                        |                                                                                                                                                      |                            |            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | 5GHz 802.11n HT40                                                                                                                                    | <b>Temperature :</b>       | 25~26°C    |
| <b>Test Channel :</b>  | 151                                                                                                                                                  | <b>Relative Humidity :</b> | 44~45%     |
| <b>Test Engineer :</b> | Gavin Wu                                                                                                                                             | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 5757 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 134.76               | 28.71               | -14.79                  | 43.5                        | 47.57                   | 11.6                        | 1.29                    | 31.75                      | -                    | -                       | Peak    |
| 137.73               | 28.03               | -15.47                  | 43.5                        | 47.18                   | 11.3                        | 1.3                     | 31.75                      | -                    | -                       | Peak    |
| 167.16               | 25.88               | -17.62                  | 43.5                        | 46.19                   | 9.86                        | 1.58                    | 31.75                      | -                    | -                       | Peak    |
| 307                  | 34.46               | -11.54                  | 46                          | 50.91                   | 13.35                       | 1.93                    | 31.73                      | 100                  | 125                     | Peak    |
| 391                  | 23.1                | -22.9                   | 46                          | 37.22                   | 15.53                       | 2.16                    | 31.81                      | -                    | -                       | Peak    |
| 441.4                | 23.18               | -22.82                  | 46                          | 35.95                   | 16.81                       | 2.29                    | 31.87                      | -                    | -                       | Peak    |
| 5757                 | 93.79               | -                       | -                           | 80.65                   | 35.06                       | 11.39                   | 33.31                      | 159                  | 283                     | Average |
| 5757                 | 103.65              | -                       | -                           | 90.51                   | 35.06                       | 11.39                   | 33.31                      | 159                  | 283                     | Peak    |
| 11511                | 50.08               | -23.92                  | 74                          | 55.02                   | 37.8                        | 11.06                   | 53.8                       | 100                  | 0                       | Peak    |

|                        |                                                                                                                                                      |                            |          |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | 5GHz 802.11n HT40                                                                                                                                    | <b>Temperature :</b>       | 25~26°C  |
| <b>Test Channel :</b>  | 151                                                                                                                                                  | <b>Relative Humidity :</b> | 44~45%   |
| <b>Test Engineer :</b> | Gavin Wu                                                                                                                                             | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 5753 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 46.2                 | 30.07               | -9.93                   | 40                          | 51.91                   | 9.17                        | 0.77                    | 31.78                      | -                    | -                       | Peak    |
| 81.3                 | 30.46               | -9.54                   | 40                          | 53.98                   | 7.24                        | 1                       | 31.76                      | 100                  | 147                     | Peak    |
| 87.24                | 29.9                | -10.1                   | 40                          | 52.5                    | 8.12                        | 1.04                    | 31.76                      | -                    | -                       | Peak    |
| 307                  | 26.67               | -19.33                  | 46                          | 43.12                   | 13.35                       | 1.93                    | 31.73                      | -                    | -                       | Peak    |
| 317.5                | 26.12               | -19.88                  | 46                          | 42.3                    | 13.61                       | 1.95                    | 31.74                      | -                    | -                       | Peak    |
| 441.4                | 24.76               | -21.24                  | 46                          | 37.53                   | 16.81                       | 2.29                    | 31.87                      | -                    | -                       | Peak    |
| 5753                 | 96.97               | -                       | -                           | 83.82                   | 35.06                       | 11.39                   | 33.3                       | 100                  | 60                      | Average |
| 5753                 | 107.09              | -                       | -                           | 93.94                   | 35.06                       | 11.39                   | 33.3                       | 100                  | 60                      | Peak    |
| 11511                | 50.96               | -23.04                  | 74                          | 55.9                    | 37.8                        | 11.06                   | 53.8                       | 100                  | 0                       | Peak    |

## 3.6 AC Conducted Emission Measurement

### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

| Frequency of Emission<br>(MHz) | Conducted Limit (dB $\mu$ V) |           |
|--------------------------------|------------------------------|-----------|
|                                | Quasi-Peak                   | Average   |
| 0.15-0.5                       | 66 to 56*                    | 56 to 46* |
| 0.5-5                          | 56                           | 46        |
| 5-30                           | 60                           | 50        |

\*Decreases with the logarithm of the frequency.

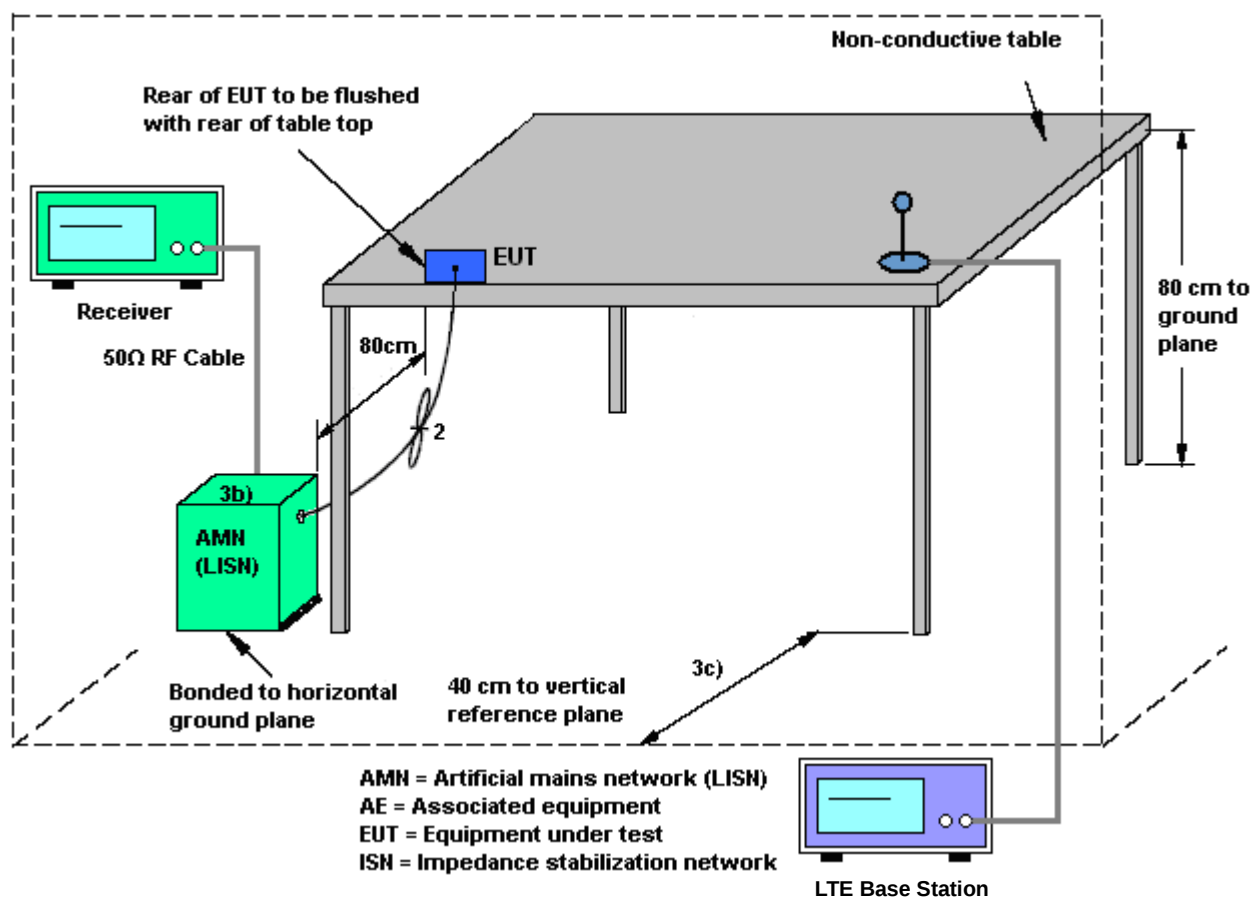
### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

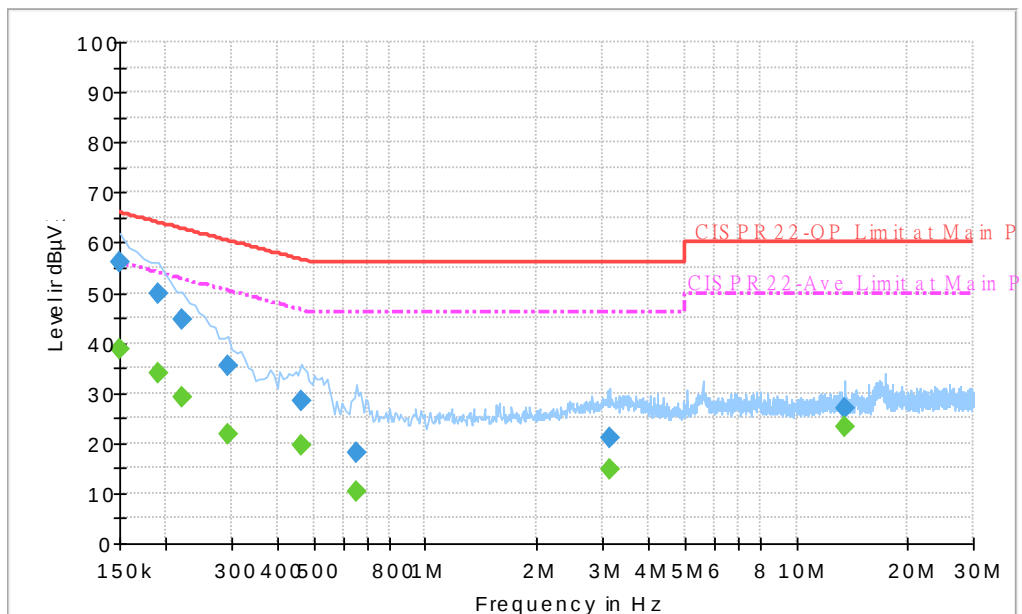
### 3.6.4 Test Setup



### 3.6.5 Test Result of AC Conducted Emission

|                        |                                                                                                                 |                            |         |
|------------------------|-----------------------------------------------------------------------------------------------------------------|----------------------------|---------|
| <b>Test Mode :</b>     | Mode 1                                                                                                          | <b>Temperature :</b>       | 20~22°C |
| <b>Test Engineer :</b> | Kai-Chun Chu                                                                                                    | <b>Relative Humidity :</b> | 46~48%  |
| <b>Test Voltage :</b>  | 120Vac / 60Hz                                                                                                   | <b>Phase :</b>             | Line    |
| <b>Function Type :</b> | LTE Band 2 Idle + WLAN 2.4GHz Link + Bluetooth Link + NFC Tx + Earphone 1 + USB Cable (Data Link with Notebook) |                            |         |

ENV216 Auto Test



#### Final Result : Quasi-Peak

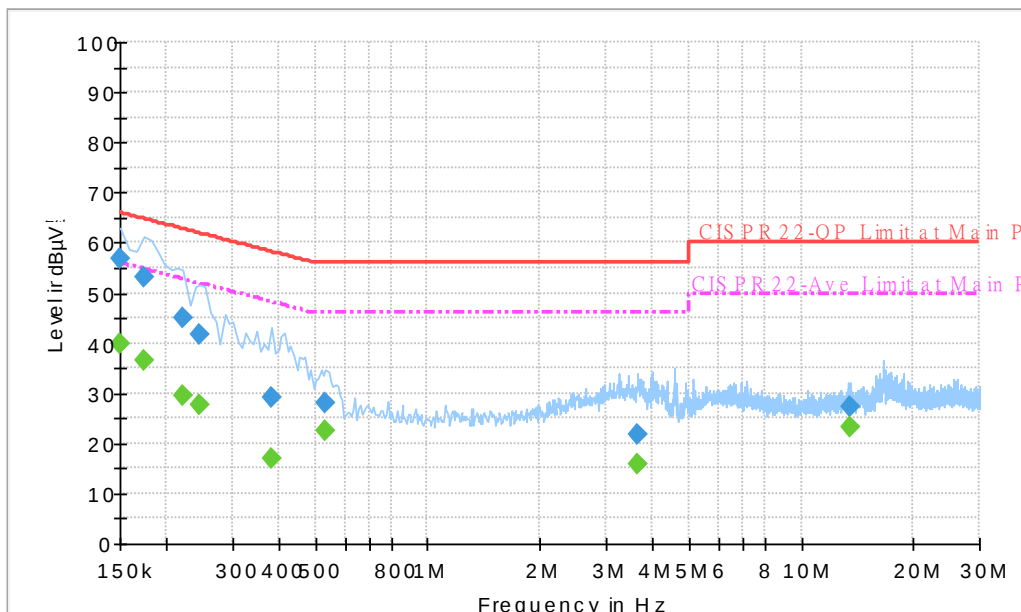
| Frequency (MHz) | Quasi-Peak (dBμV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|-------------------|--------|------|------------|-------------|--------------|
| 0.150000        | 56.2              | Off    | L1   | 19.4       | 9.8         | 66.0         |
| 0.190000        | 49.8              | Off    | L1   | 19.4       | 14.2        | 64.0         |
| 0.222000        | 44.6              | Off    | L1   | 19.4       | 18.1        | 62.7         |
| 0.294000        | 35.3              | Off    | L1   | 19.4       | 25.1        | 60.4         |
| 0.462000        | 28.4              | Off    | L1   | 19.3       | 28.3        | 56.7         |
| 0.654000        | 18.0              | Off    | L1   | 19.4       | 38.0        | 56.0         |
| 3.134000        | 20.9              | Off    | L1   | 19.6       | 35.1        | 56.0         |
| 13.558000       | 27.1              | Off    | L1   | 19.8       | 32.9        | 60.0         |

#### Final Result : Average

| Frequency (MHz) | Average (dBμV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|----------------|--------|------|------------|-------------|--------------|
| 0.150000        | 38.7           | Off    | L1   | 19.4       | 17.3        | 56.0         |
| 0.190000        | 33.8           | Off    | L1   | 19.4       | 20.2        | 54.0         |
| 0.222000        | 29.1           | Off    | L1   | 19.4       | 23.6        | 52.7         |
| 0.294000        | 21.7           | Off    | L1   | 19.4       | 28.7        | 50.4         |
| 0.462000        | 19.7           | Off    | L1   | 19.3       | 27.0        | 46.7         |
| 0.654000        | 10.2           | Off    | L1   | 19.4       | 35.8        | 46.0         |
| 3.134000        | 14.9           | Off    | L1   | 19.6       | 31.1        | 46.0         |
| 13.558000       | 23.1           | Off    | L1   | 19.8       | 26.9        | 50.0         |

|                        |                                                                                                                 |                            |         |
|------------------------|-----------------------------------------------------------------------------------------------------------------|----------------------------|---------|
| <b>Test Mode :</b>     | Mode 1                                                                                                          | <b>Temperature :</b>       | 20~22°C |
| <b>Test Engineer :</b> | Kai-Chun Chu                                                                                                    | <b>Relative Humidity :</b> | 46~48%  |
| <b>Test Voltage :</b>  | 120Vac / 60Hz                                                                                                   | <b>Phase :</b>             | Neutral |
| <b>Function Type :</b> | LTE Band 2 Idle + WLAN 2.4GHz Link + Bluetooth Link + NFC Tx + Earphone 1 + USB Cable (Data Link with Notebook) |                            |         |

ENV216 Auto Test


**Final Result : Quasi-Peak**

| Frequency (MHz) | Quasi-Peak (dBμV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|-------------------|--------|------|------------|-------------|--------------|
| 0.150000        | 56.9              | Off    | N    | 19.4       | 9.1         | 66.0         |
| 0.174000        | 53.1              | Off    | N    | 19.3       | 11.7        | 64.8         |
| 0.222000        | 44.9              | Off    | N    | 19.4       | 17.8        | 62.7         |
| 0.246000        | 41.6              | Off    | N    | 19.4       | 20.3        | 61.9         |
| 0.382000        | 29.0              | Off    | N    | 19.3       | 29.2        | 58.2         |
| 0.534000        | 28.0              | Off    | N    | 19.4       | 28.0        | 56.0         |
| 3.646000        | 21.8              | Off    | N    | 19.6       | 34.2        | 56.0         |
| 13.558000       | 27.2              | Off    | N    | 19.9       | 32.8        | 60.0         |

**Final Result : Average**

| Frequency (MHz) | Average (dBμV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|----------------|--------|------|------------|-------------|--------------|
| 0.150000        | 39.9           | Off    | N    | 19.4       | 16.1        | 56.0         |
| 0.174000        | 36.7           | Off    | N    | 19.3       | 18.1        | 54.8         |
| 0.222000        | 29.7           | Off    | N    | 19.4       | 23.0        | 52.7         |
| 0.246000        | 27.5           | Off    | N    | 19.4       | 24.4        | 51.9         |
| 0.382000        | 16.8           | Off    | N    | 19.3       | 31.4        | 48.2         |
| 0.534000        | 22.4           | Off    | N    | 19.4       | 23.6        | 46.0         |
| 3.646000        | 16.0           | Off    | N    | 19.6       | 30.0        | 46.0         |
| 13.558000       | 23.4           | Off    | N    | 19.9       | 26.6        | 50.0         |

## 3.7 Antenna Requirements

### 3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### 3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

### 3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

## 4 List of Measuring Equipment

| Instrument                            | Manufacturer    | Model No.     | Serial No.  | Characteristics | Calibration Date | Test Date                       | Due Date      | Remark                |
|---------------------------------------|-----------------|---------------|-------------|-----------------|------------------|---------------------------------|---------------|-----------------------|
| Spectrum Analyzer                     | Rohde & Schwarz | FSP40         | 100055      | 9kHz~40GHz      | Jun. 07, 2013    | Mar. 23, 2014                   | Jun. 06, 2014 | Conducted (TH02-HY)   |
| Power Meter                           | Agilent         | E4416A        | GB41292344  | 300MHz~40GHz    | Jan. 28, 2014    | Mar. 23, 2014                   | Jan. 27, 2015 | Conducted (TH02-HY)   |
| Power Sensor                          | Agilent         | E9327A        | US40441548  | 300MHz~40GHz    | Jan. 28, 2014    | Mar. 23, 2014                   | Jan. 27, 2015 | Conducted (TH02-HY)   |
| Spectrum Analyzer                     | R&S             | FSP30         | 101067      | 9kHz ~ 30GHz    | Nov. 20, 2013    | Mar. 22, 2014~<br>May 21, 2014  | Nov. 19, 2014 | Radiation (03CH06-HY) |
| EMI Test Receiver                     | R&S             | ESVS10        | 834468/0003 | 20MHz ~ 1000MHz | May 06, 2013     | Mar. 22, 2014                   | May 05, 2014  | Radiation (03CH06-HY) |
| EMI Test Receiver                     | R&S             | ESVS10        | 834468/0003 | 20MHz ~ 1000MHz | May 06, 2014     | May 21, 2014                    | May 05, 2015  | Radiation (03CH06-HY) |
| Bilog Antenna                         | Schaffner       | CBL6112B      | 2885        | 30MHz -2GHz     | Oct. 10, 2013    | Mar. 22, 2014~<br>May 21, 2014  | Oct. 09, 2014 | Radiation (03CH06-HY) |
| Double Ridge Horn Antenna             | EMCO            | 3117          | 00066583    | 1GHz ~ 18GHz    | Aug. 02, 2013    | Mar. 22, 2014~<br>May 21, 2014  | Aug. 01, 2014 | Radiation (03CH06-HY) |
| Amplifier                             | Agilent         | 310N          | 186713      | 9kHz ~ 1GHz     | Apr. 12, 2013    | Mar. 21, 2014                   | Apr. 11, 2014 | Radiation (03CH06-HY) |
| Amplifier                             | Agilent         | 310N          | 186713      | 9kHz ~ 1GHz     | Apr. 16, 2014    | May 21, 2014                    | Apr. 15, 2015 | Radiation (03CH06-HY) |
| Pre Amplifier                         | EMCI            | EMC0518<br>45 | SN980048    | 1GHz ~ 18GHz    | Jul. 18, 2013    | Mar. 22, 2014~<br>May 21, 2014  | Jul. 17, 2014 | Radiation (03CH06-HY) |
| SHF-EHF Horn Antenna                  | SCHWARZBECK     | BBHA<br>9170  | BBHA9170251 | 15GHz ~ 40GHz   | Oct. 03, 2013    | Mar. 22, 2014~<br>May 21, 2014  | Oct. 02, 2014 | Radiation (03CH06-HY) |
| Preamplifier                          | Agilent         | 8449B         | 3008A01917  | 1GHz ~ 26.5GHz  | Feb. 10, 2014    | Mar. 22, 2014~<br>May 21, 2014  | Feb. 19, 2015 | Radiation (03CH06-HY) |
| Turn Table                            | INN-CO          | DS2000        | 420/650/00  | 0 - 360 degree  | N/A              | Mar. 22, 2014~<br>May 21, 2014  | N/A           | Radiation (03CH06-HY) |
| Antenna Mast                          | MF              | MF-7802       | MF780208212 | 1 m ~ 4 m       | N/A              | Mar. 22, 2014~<br>May 21, 2014  | N/A           | Radiation (03CH06-HY) |
| EMI Test Receiver                     | Rohde & Schwarz | ESCS 30       | 100356      | 9kHz ~ 2.75GHz  | Nov. 15, 2013    | Mar. 27, 2014 ~<br>May 19, 2014 | Nov. 14, 2014 | Conduction (CO05-HY)  |
| Two-LISN<br>(for auxiliary equipment) | Rohde & Schwarz | ENV216        | 100081      | 9kHz ~ 30MHz    | Dec. 12, 2013    | Mar. 27, 2014 ~<br>May 19, 2014 | Dec. 11, 2014 | Conduction (CO05-HY)  |
| Two-LISN                              | Rohde & Schwarz | ENV216        | 100080      | 9kHz ~ 30MHz    | Dec. 04, 2013    | Mar. 27, 2014 ~<br>May 19, 2014 | Dec. 03, 2014 | Conduction (CO05-HY)  |
| AC Power Source                       | APC             | APC-1000<br>W | N/A         | N/A             | N/A              | Mar. 27, 2014 ~<br>May 19, 2014 | N/A           | Conduction (CO05-HY)  |



| Instrument        | Manufacturer    | Model No.     | Serial No.  | Characteristics               | Calibration Date | Test Date    | Due Date      | Remark                |
|-------------------|-----------------|---------------|-------------|-------------------------------|------------------|--------------|---------------|-----------------------|
| EMI Test Receiver | Rohde & Schwarz | ESCI 7        | 100724      | 9kHz~7GHz                     | Sep. 06, 2013    | May 21, 2014 | Sep. 05, 2014 | Radiation (03CH07-HY) |
| Loop Antenna      | Rohde & Schwarz | HFH2-Z2       | 860004/0001 | 9 kHz~30 MHz                  | Jul. 03, 2012    | May 21, 2014 | Jul. 02, 2014 | Radiation (03CH07-HY) |
| Bilog Antenna     | Schaffner       | CBL6111C      | 2726        | 30MHz ~ 1GHz                  | Oct. 10, 2013    | May 21, 2014 | Oct. 09, 2014 | Radiation (03CH07-HY) |
| Preamplifier      | COM-POWER       | PA-103A       | 161241      | 10 MHz ~ 1000MHz<br>32dB GAIN | Mar. 17, 2014    | May 21, 2014 | Mar. 16, 2015 | Radiation (03CH07-HY) |
| Turn Table        | ChainTek        | ChainTek 3000 | N/A         | 0 ~ 360 degree                | N/A              | May 21, 2014 | N/A           | Radiation (03CH07-HY) |
| Antenna Mast      | ChainTek        | ChainTek 3000 | N/A         | N/A                           | N/A              | May 21, 2014 | N/A           | Radiation (03CH07-HY) |

## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

|                                                                         |      |
|-------------------------------------------------------------------------|------|
| Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ ) | 2.26 |
|-------------------------------------------------------------------------|------|

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

|                                                                         |      |
|-------------------------------------------------------------------------|------|
| Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ ) | 4.50 |
|-------------------------------------------------------------------------|------|