



# FCC TEST REPORT

**REPORT NO.:** RF921112R02

**MODEL NO.:** BT-0310

**RECEIVED:** November 12, 2003

**TESTED:** November 19 ~ November 20, 2003

**APPLICANT:** CC&C TECHNOLOGIES INC.

**ADDRESS:** 8F, 150, Jian Yi Road, Chung Ho City, Taipei County, Taiwan 235, R.O.C.

**ISSUED BY:** Advance Data Technology Corporation

**LAB LOCATION:** 47 14th Lin, Chiapau Tsun, Linko, Taipei, Taiwan, R.O.C.

This test report consists of 55 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP or any government agencies. The test results in the report only apply to the tested sample.



0528  
ILAC MRA



Lab Code: 200102-0

## TABLE OF CONTENTS

1	CERTIFICATION .....	4
2	SUMMARY OF TEST RESULTS .....	5
3	GENERAL INFORMATION.....	6
3.1	GENERAL DESCRIPTION OF EUT.....	6
3.2	DESCRIPTION OF TEST MODES.....	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS .....	7
3.4	DESCRIPTION OF SUPPORT UNITS .....	8
4	TEST PROCEDURES AND RESULTS .....	9
4.1	CONDUCTED EMISSION MEASUREMENT .....	9
4.2	NUMBER OF HOPPING FREQUENCY USED .....	9
4.2.1	LIMIT OF HOPPING FREQUENCY USED .....	9
4.2.2	TEST INSTRUMENTS.....	9
4.2.3	TEST PROCEDURES .....	10
4.2.4	DEVIATION FROM TEST STANDARD .....	10
4.2.5	TEST SETUP .....	11
4.2.6	TEST RESULTS .....	11
4.3	DWELL TIME ON EACH CHANNEL .....	14
4.3.1	LIMIT OF DWELL TIME USED.....	14
4.3.2	TEST INSTRUMENTS.....	14
4.3.3	TEST PROCEDURES .....	15
4.3.4	DEVIATION FROM TEST STANDARD .....	15
4.3.5	TEST SETUP .....	15
4.3.6	TEST RESULTS .....	16
4.4	CHANNEL BANDWIDTH.....	22
4.4.1	LIMITS OF CHANNEL BANDWIDTH .....	22
4.4.2	TEST INSTRUMENTS.....	22
4.4.3	TEST PROCEDURE.....	23
4.4.4	DEVIATION FROM TEST STANDARD .....	23
4.4.5	TEST SETUP .....	23
4.4.6	EUT OPERATING CONDITION .....	23
4.4.7	TEST RESULTS .....	24
4.5	HOPPING CHANNEL SEPARATION .....	28
4.5.1	LIMIT OF HOPPING CHANNEL SEPARATION .....	28
4.5.2	TEST INSTRUMENTS.....	28
4.5.3	TEST PROCEDURES .....	29

4.5.4	DEVIATION FROM TEST STANDARD .....	29
4.5.5	TEST SETUP .....	29
4.5.6	TEST RESULTS .....	30
4.6	MAXIMUM PEAK OUTPUT POWER –USING POWER METTER.....	34
4.6.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT .....	34
4.6.2	INSTRUMENTS.....	34
4.6.3	TEST PROCEDURES .....	35
4.6.4	DEVIATION FROM TEST STANDARD .....	35
4.6.5	TEST SETUP .....	36
4.6.6	EUT OPERATING CONDITION .....	36
4.6.7	TEST RESULTS .....	37
4.7	RADIATED EMISSION MEASUREMENT .....	41
4.7.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	41
4.7.2	TEST INSTRUMENTS.....	42
4.7.3	TEST PROCEDURES .....	43
4.7.4	DEVIATION FROM TEST STANDARD .....	43
4.7.5	TEST SETUP .....	44
4.7.6	TEST RESULTS .....	45
4.8	BAND EDGES MEASUREMENT.....	49
4.8.1	LIMITS OF BAND EDGES MEASUREMENT .....	49
4.8.2	TEST INSTRUMENTS.....	49
4.8.3	TEST PROCEDURE.....	49
4.8.4	DEVIATION FROM TEST STANDARD .....	49
4.8.5	EUT OPERATING CONDITION .....	50
4.8.6	TEST RESULTS .....	50
4.9	ANTENNA REQUIREMENT .....	53
4.9.1	STANDARD APPLICABLE .....	53
4.9.2	ANTENNA CONNECTED CONSTRUCTION.....	53
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	54
6	INFORMATION ON THE TESTING LABORATORIES .....	55



## 1 CERTIFICATION

**PRODUCT :** Bluetooth Wireless/USB Keyboard  
**BRAND NAME :** CC&C  
**MODEL NO. :** BT-0310  
**TEST ITEM :** ENGINEERING SAMPLE  
**APPLICANT :** CC&C TECHNOLOGIES INC.  
**STANDARDS :** 47 CFR Part 15, Subpart C (Section 15.247),  
ANSI C63.4-1992

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from November 19, 2003 to November 20, 2003. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

**PREPARED BY:** Stacy Hsueh., **DATE:** November 21, 2003

Stacy Hsueh

**APPROVED BY:** Ellis Wu, **DATE:** November 21, 2003

Ellis Wu /

Technical Manager

## 2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.107	AC Power Conducted Emission Limit: 48dBuV	NA	NA
15.247(a)(1) (I)-(ii)	Number of Hopping Frequency Used Spec.:At least 75 channels	PASS	Meet the requirement of limit
15.247(a)(1) (ii)	Dwell Time on Each Channel Spec. : Max. 0.4 second within 30 second	PASS	Meet the requirement of limit
15.247(a)(1) (I)-(ii)	Hopping Channel Separation Spec. : Min. 25 kHz or 20 dB bandwidth	PASS	Meet the requirement of limit
15.247(a)(2)	Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System Spec.: Max. 1 MHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Spec.: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Spec.: Table 15.209	PASS	Meet the requirement of limit  Minimum passing margin is -2.00 dB at 79.99MHz
15.247(c)	Band Edge Measurement	PASS	Meet the requirement of limit

Note: The information of measurement uncertainty is available upon the customer's request.

### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	Bluetooth Wireless/USB Keyboard
<b>MODEL NO.</b>	BT-0310
<b>POWER SUPPLY</b>	6Vdc from battery
<b>MODULATION TYPE</b>	FHSS (GFSK)
<b>FREQUENCY RANGE</b>	2402MHz ~ 2480MHz
<b>NUMBER OF CHANNEL</b>	79
<b>OUTPUT POWER</b>	3.46dBm
<b>ANTENNA TYPE</b>	Printed Antenna
<b>ANTENNA GAIN</b>	2dBi
<b>DATA CABLE</b>	USB (1.8m shielded cable)
<b>I/O PORTS</b>	USB Port
<b>ASSOCIATED DEVICES</b>	NA

**NOTE:**

1. The EUT is the Bluetooth Wireless keyboard, the test report includes the Bluetooth Wireless function. But the Keyboard used the USB interface function in the 15B report.
2. For a more detailed features description, please refer to the manufacturer's specifications or User's Manual

### 3.2 DESCRIPTION OF TEST MODES

Seventy-nine channels are provided to this EUT.

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2431	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

The EUT (Bluetooth Wireless/USB Keyboard) has been tested under operating and standby condition. Software used to control the EUT for staying in continuous transmitting and receiving mode is programmed. Channel 0, 39 and 78 are chosen for testing to fulfill the requirement of frequency spectrum usage in each country.

### 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Bluetooth Wireless/USB Keyboard. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC 47 CFR Part 15, Subpart C. (15.247)**

**ANSI C63.4 : 1992**

All test items have been performed and recorded as per the above standards.

**NOTE:** The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.


### 3.4 DESCRIPTION OF SUPPORT UNITS

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	DELL	PP01L	TW-0791UH-12800-123-5423	FCC DoC Approved
2	PRINTER	EPSON	LQ-300+	DCGY017058	FCC DoC Approved

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.2m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core

**NOTE:** All power cords of the above support units are non shielded (1.8m).

### 3.5 CONFIGURATION OF SYSTEM UNDER TEST

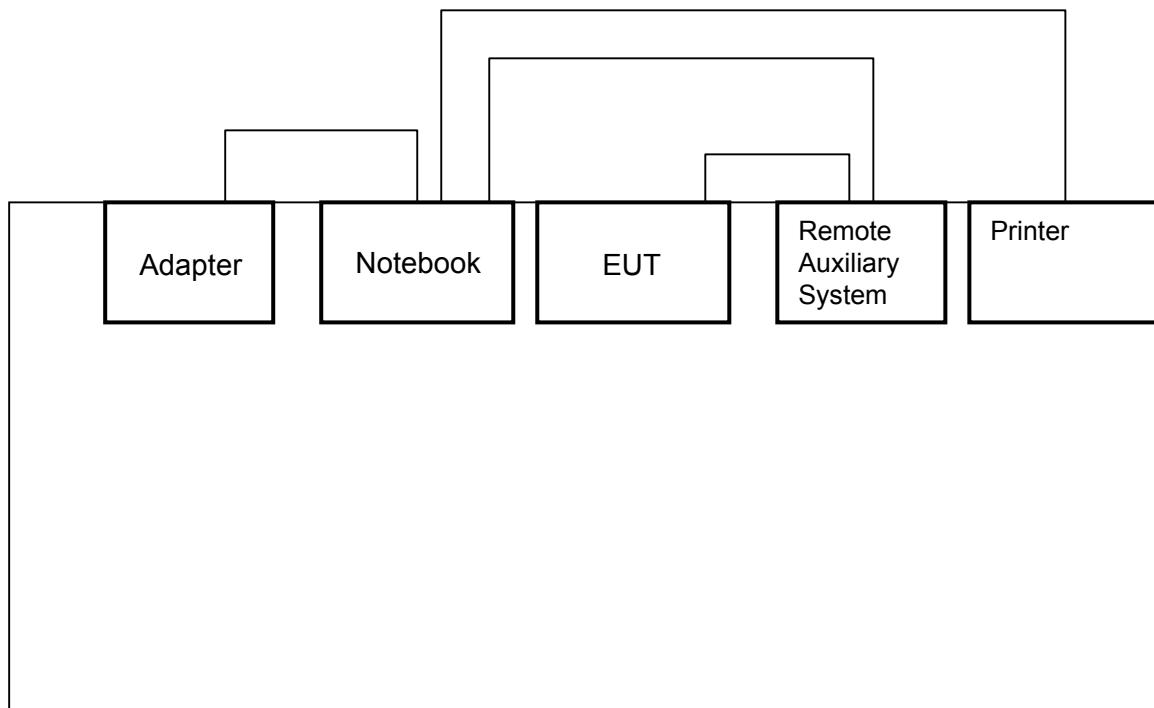

## 4 TEST PROCEDURES AND RESULTS

### 4.1 CONDUCTED EMISSION MEASUREMENT

NA

### 4.2 NUMBER OF HOPPING FREQUENCY USED

#### 4.2.1 LIMIT OF HOPPING FREQUENCY USED

At least 15 hopping frequencies, and should be equally spaced.

#### 4.2.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

#### NOTE:

The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.


#### 4.2.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
4. Set the SA on View mode and then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

#### 4.2.4 DEVIATION FROM TEST STANDARD


No deviation


#### 4.2.5 TEST SETUP

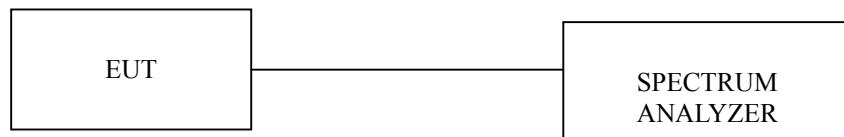

#### 4.2.6 TEST RESULTS

There are 79 hopping frequencies in the hopping mode. Please refer to next two pages for the test result. On the plots, it shows that the hopping frequencies are equally spaced.

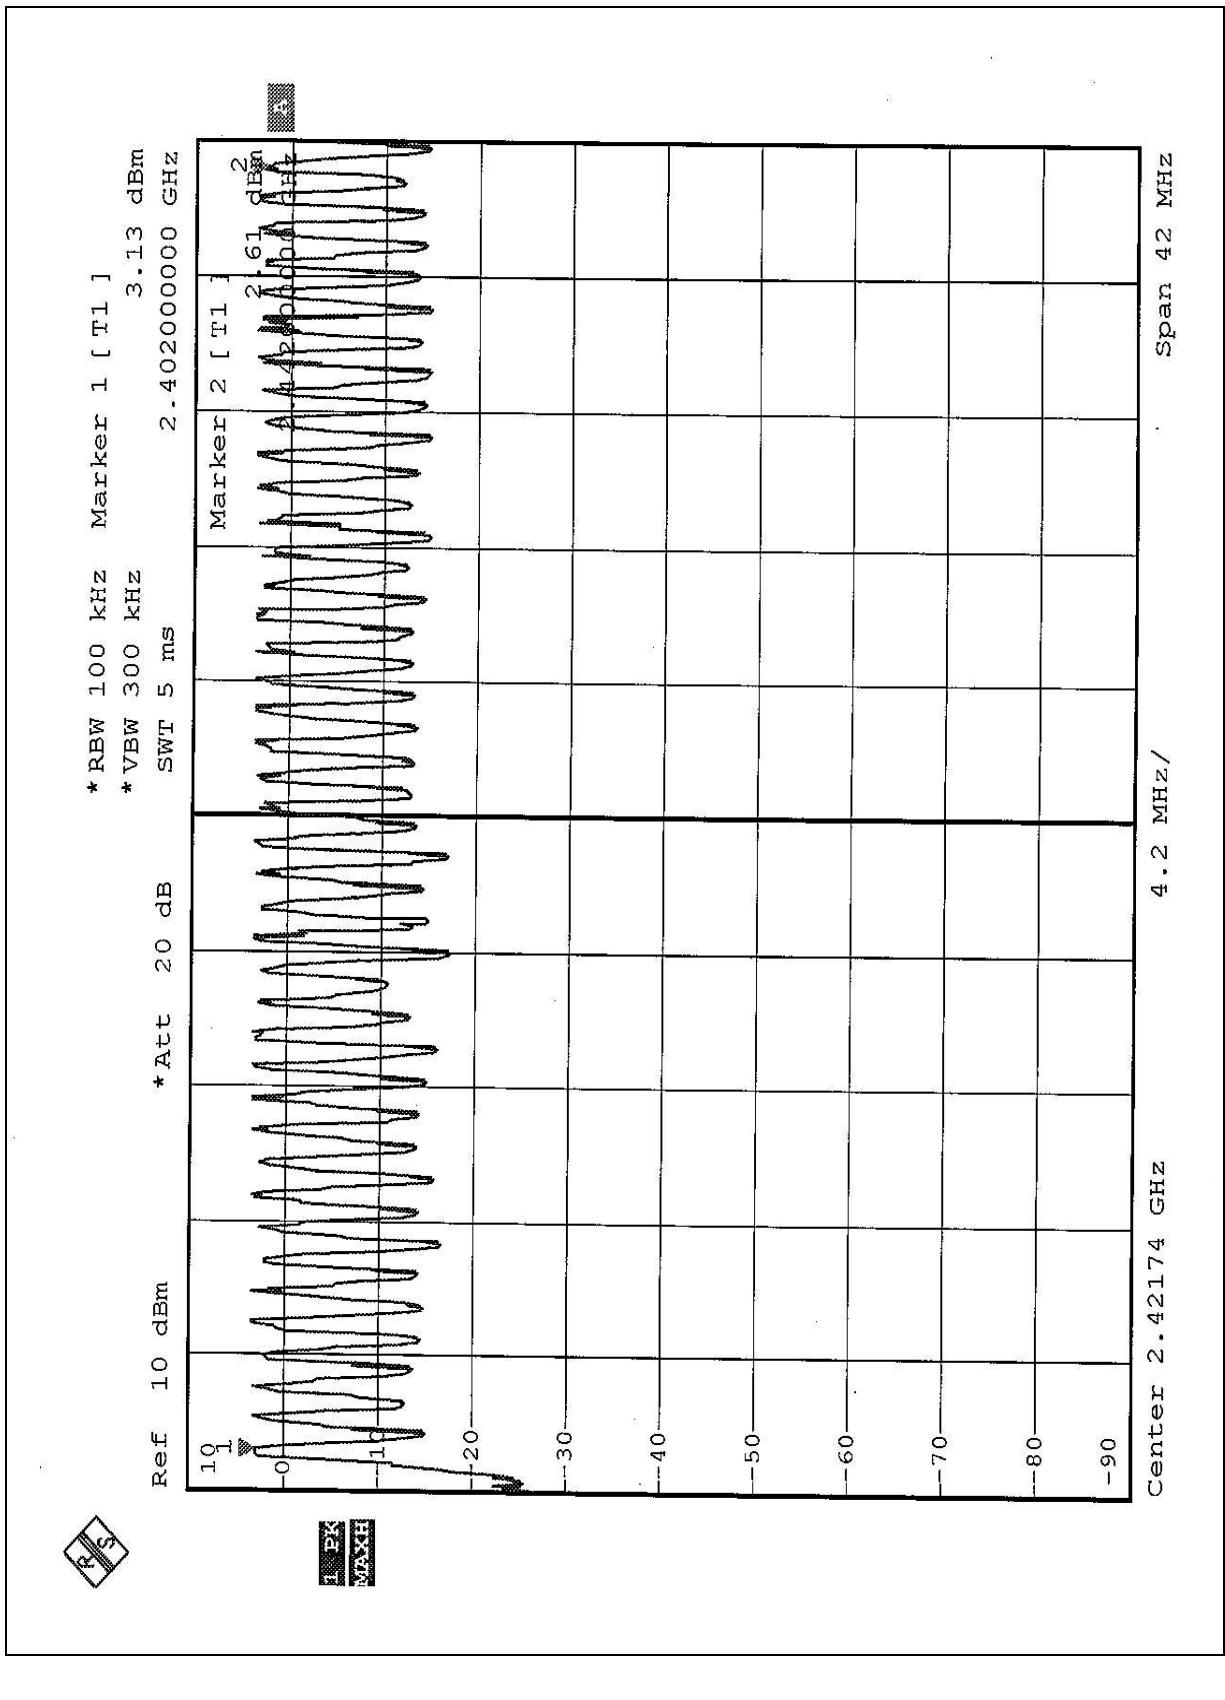

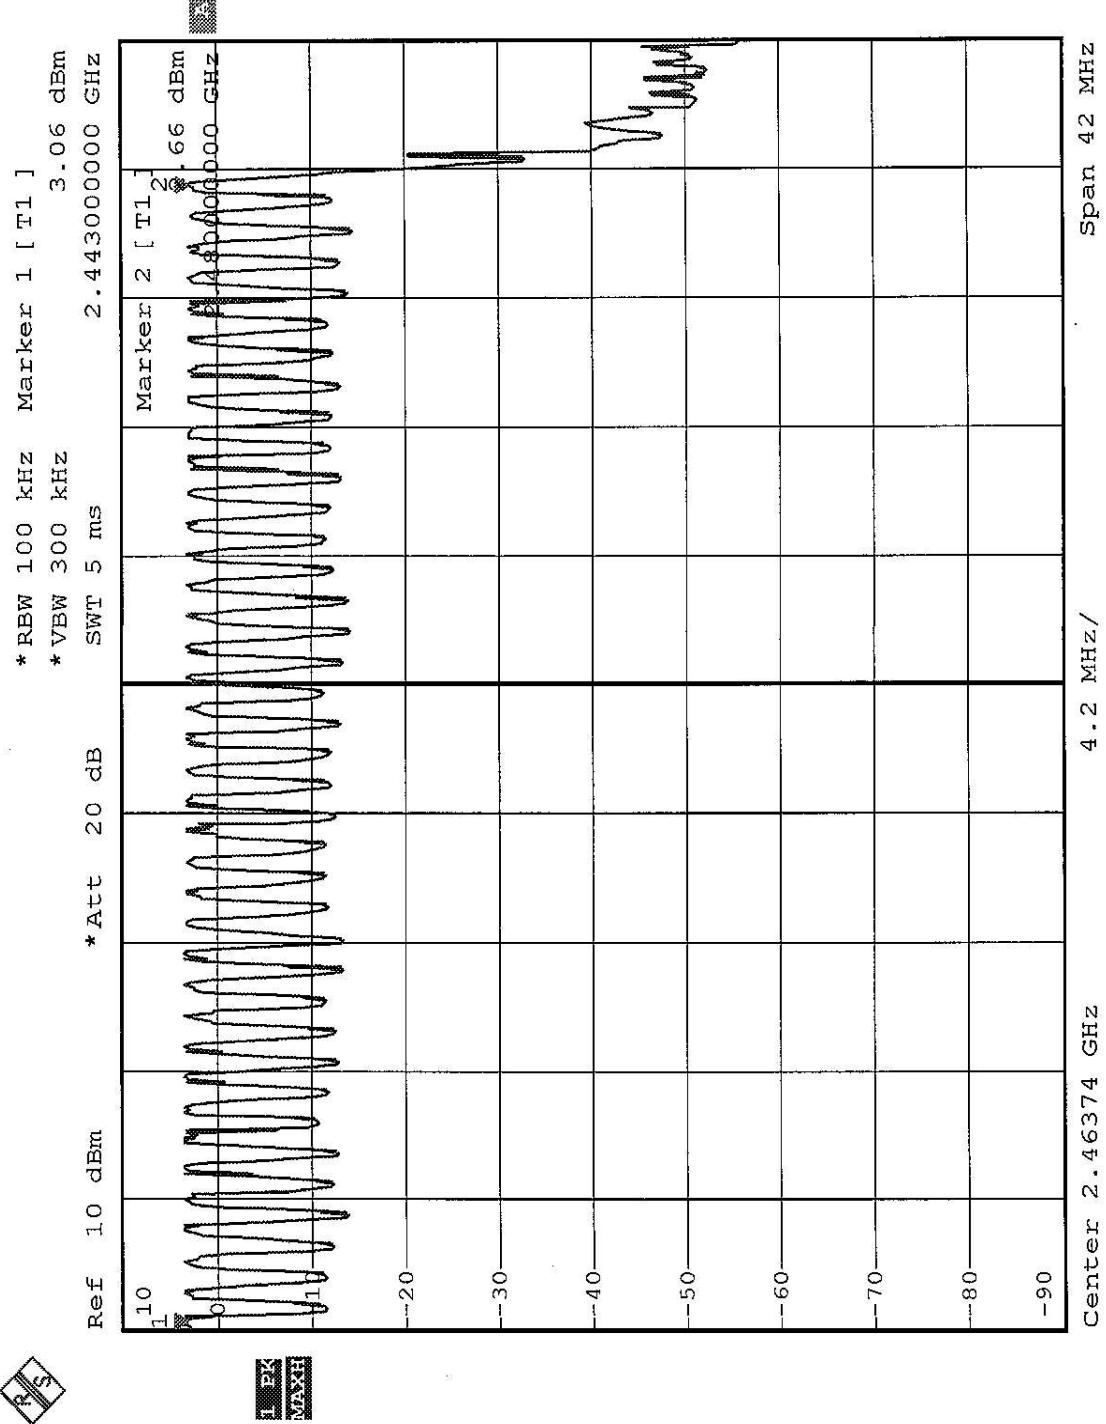



### 4.3 DWELL TIME ON EACH CHANNEL

#### 4.3.1 LIMIT OF DWELL TIME USED

For FHSS, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 31.6 second period. For hybrid systems, the average time of occupancy on any frequency should not exceed 0.4 seconds within a time period in seconds equal to the number of hopping frequencies employed multiplied by 0.4.

#### 4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

#### NOTES:

The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.


#### 4.3.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of SA on any frequency to be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
5. Repeat above procedures until all frequencies measured were complete.

#### 4.3.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.3.5 TEST SETUP

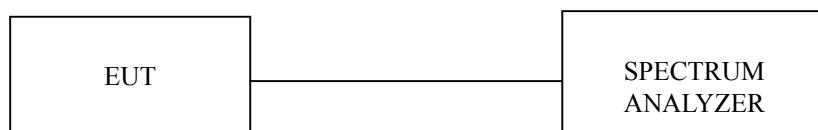



#### 4.3.6 TEST RESULTS

##### DH1-Packet

The system makes worst case 50 hops per 5 second each hop length of 0.48ms with 1 channel. So you have each channel 316 times per 31.6 second .

So we have  $316 \times 0.48\text{ms} = 151.68 \text{ ms}$  per 31.6 seconds.

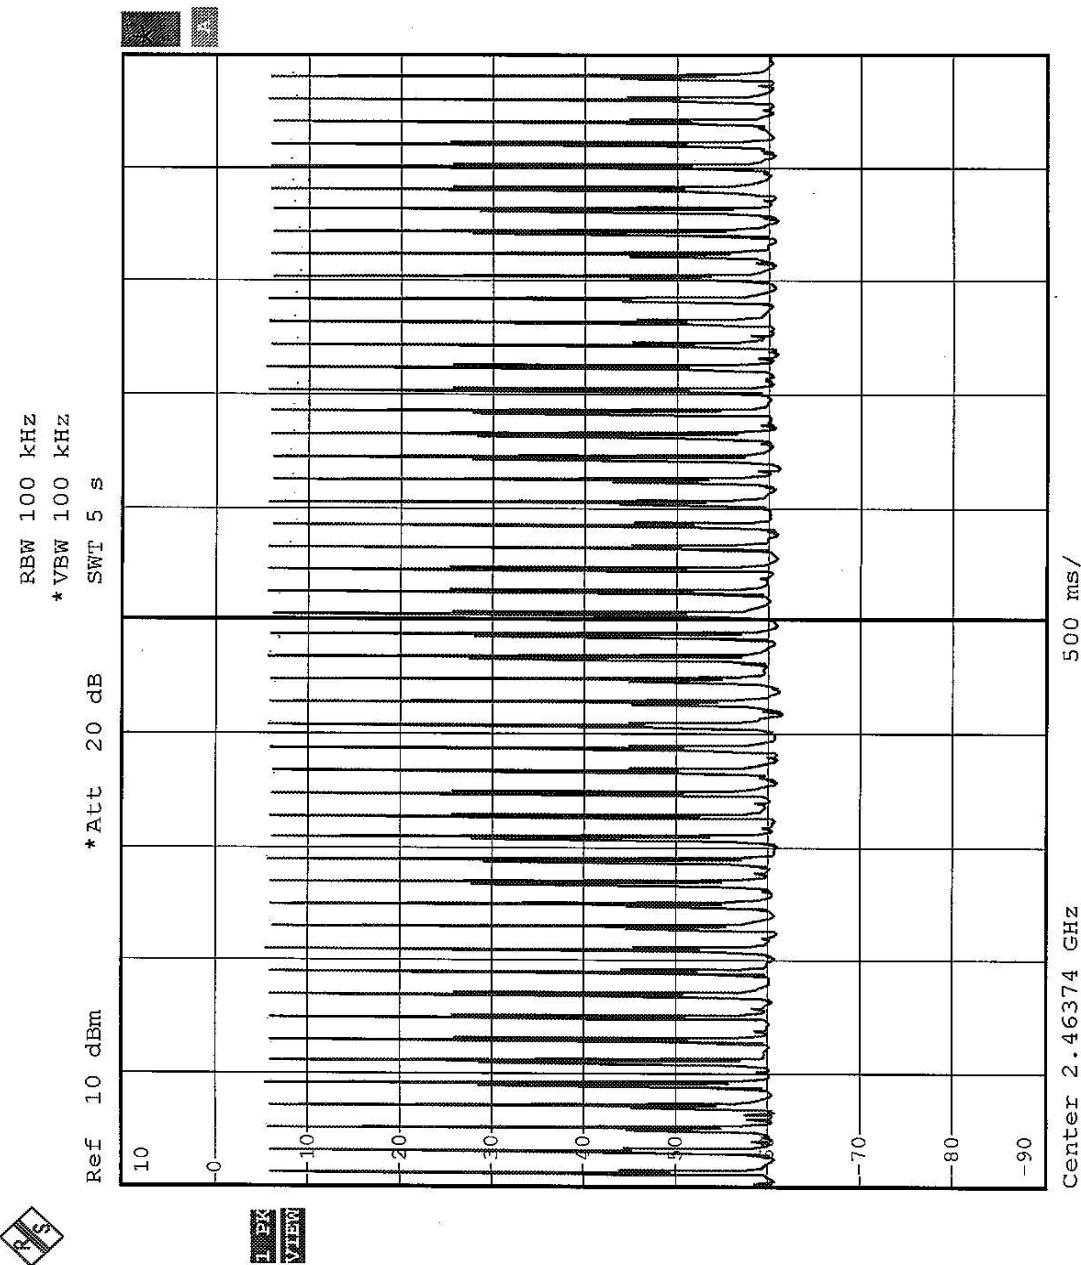


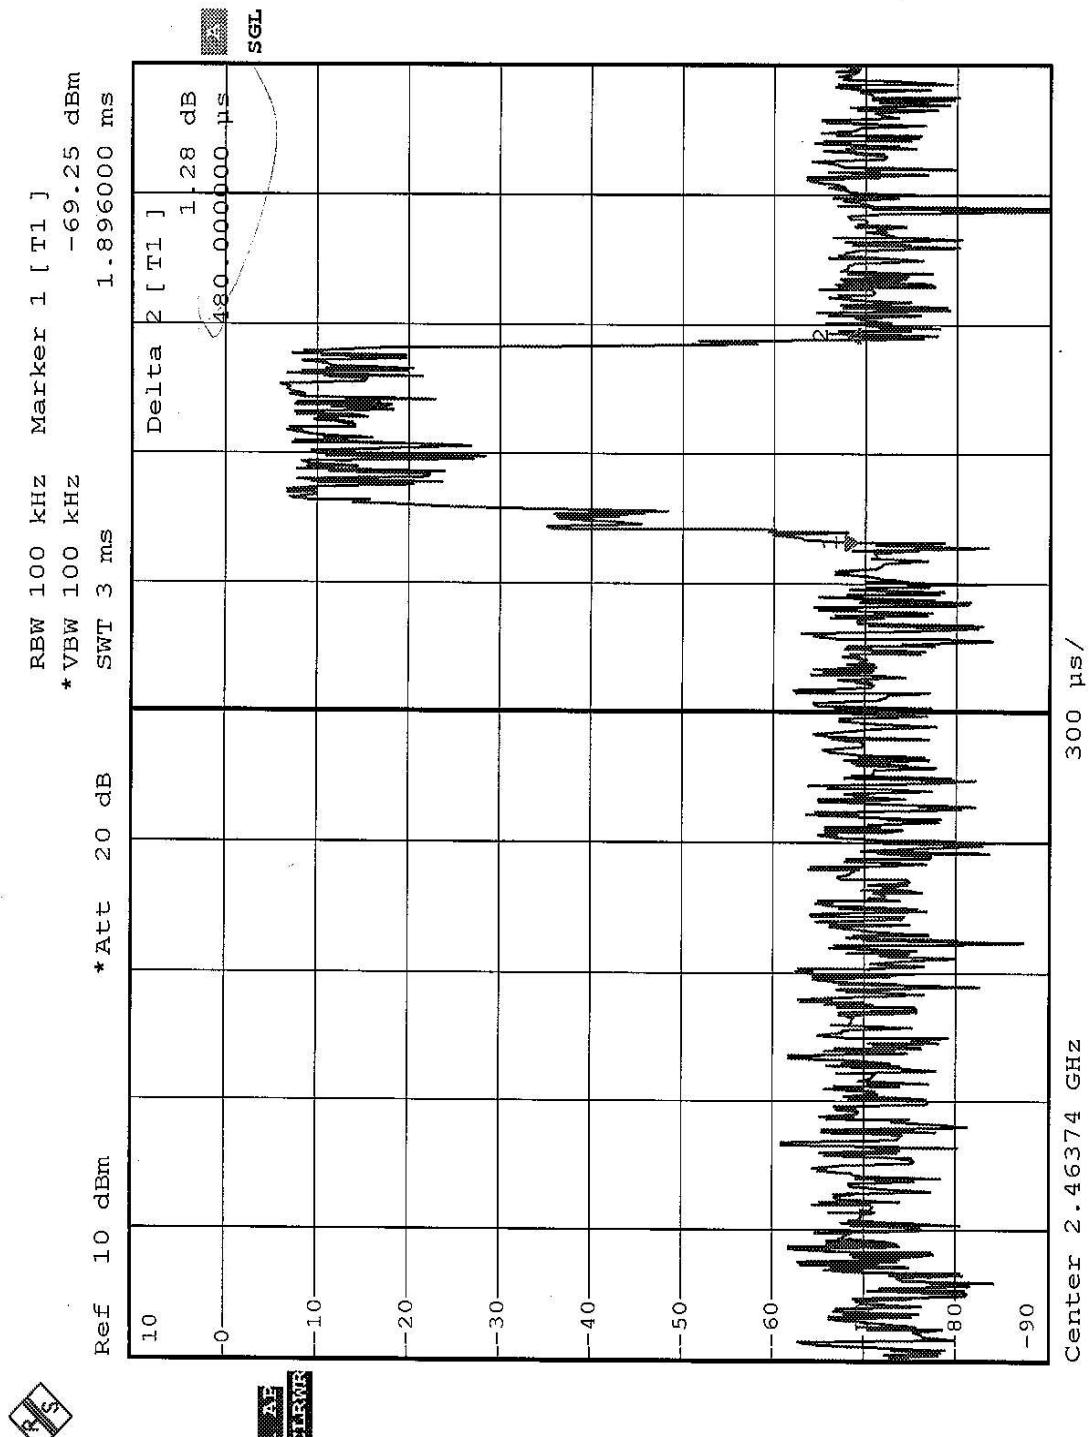


## DH3-Packet

The system makes worst case 26 hops per 5 second each hop length of 1.78ms with 1 channel. So you have each channel 164.32 times per 31.6 second .

So we have  $164.32 \times 1.78\text{ms} = 292.48 \text{ ms}$  per 31.6 seconds..

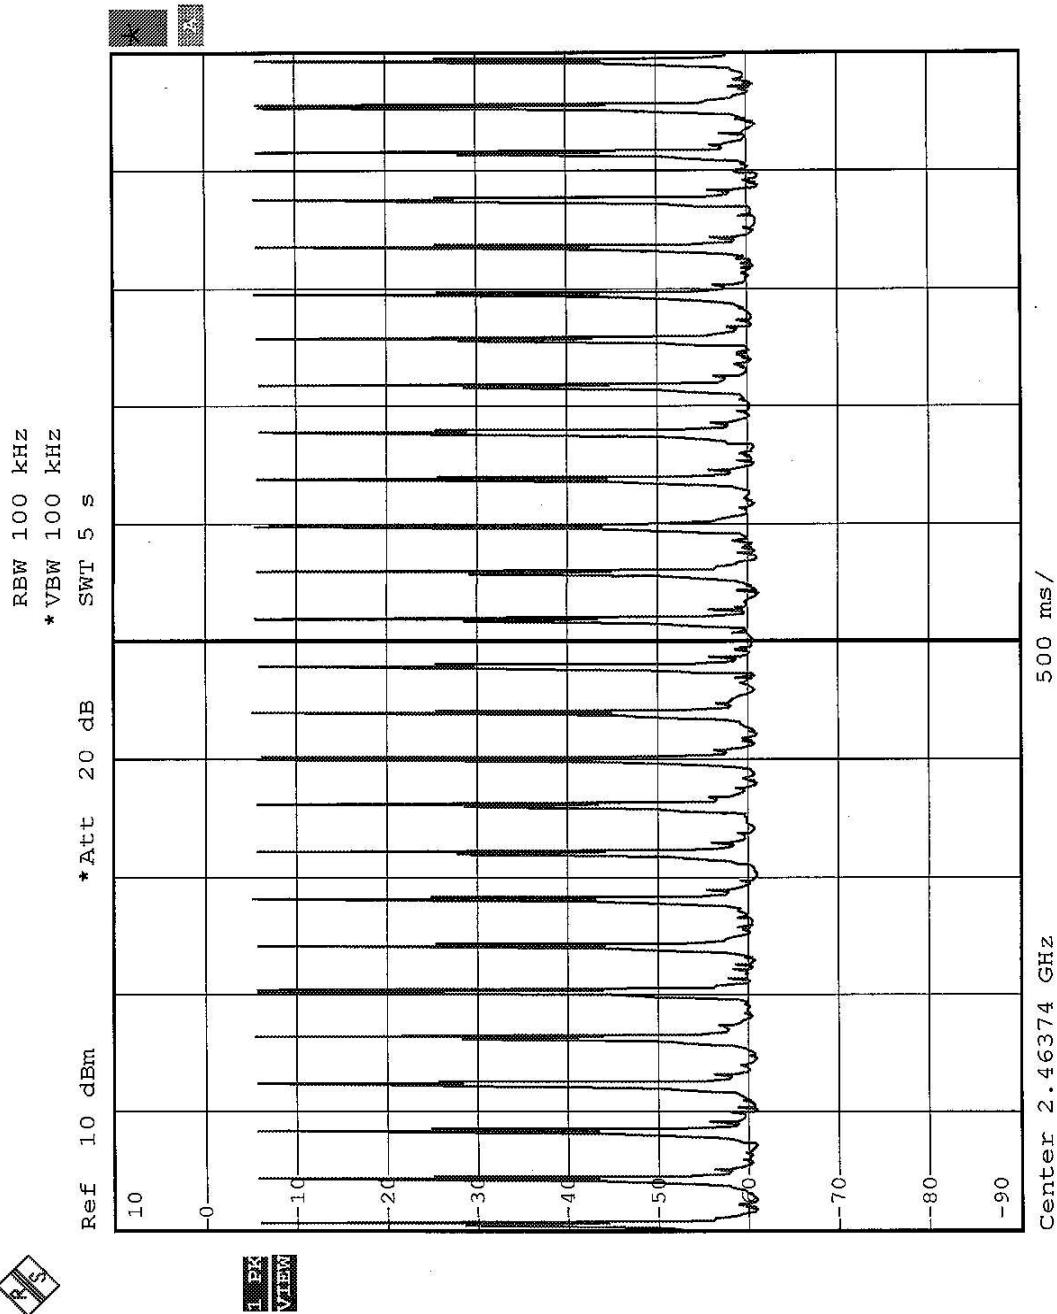


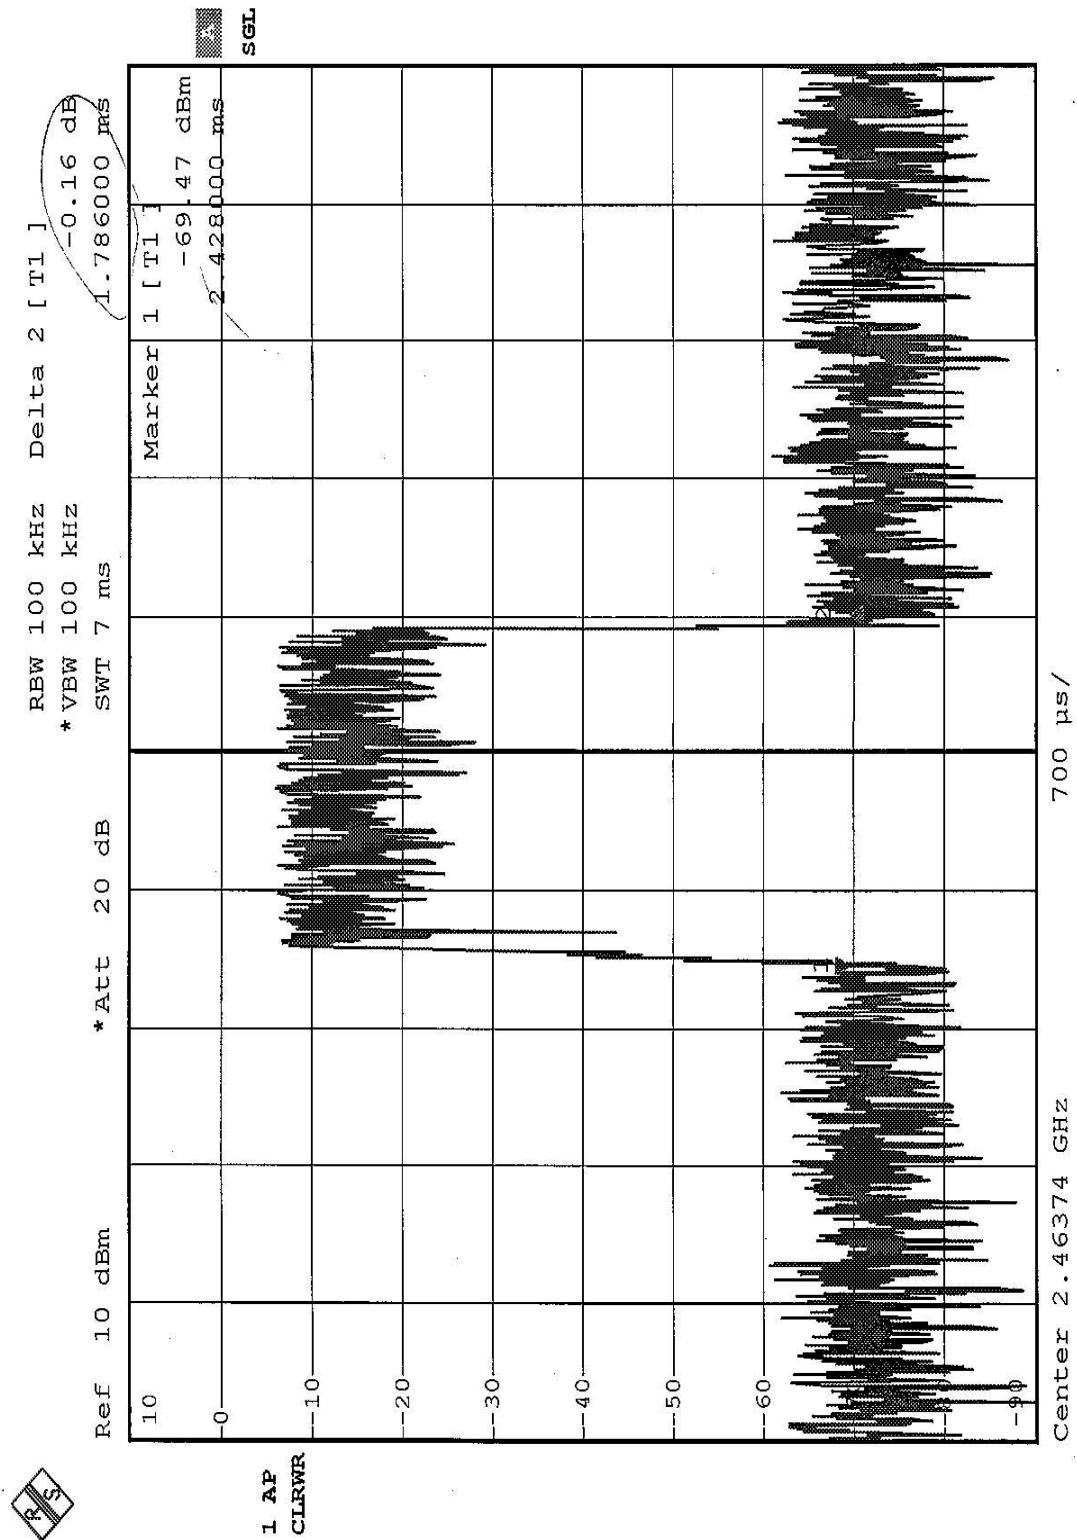


## DH5-Packet

The system makes worst case 17 hops per 5 second each hop length of 3.024ms with 1 channel. So you have each channel 107.44 times per 31.6 second .

So we have  $107.44 \times 3.024\text{ms} = 324.89 \text{ ms}$  per 31.6 seconds.

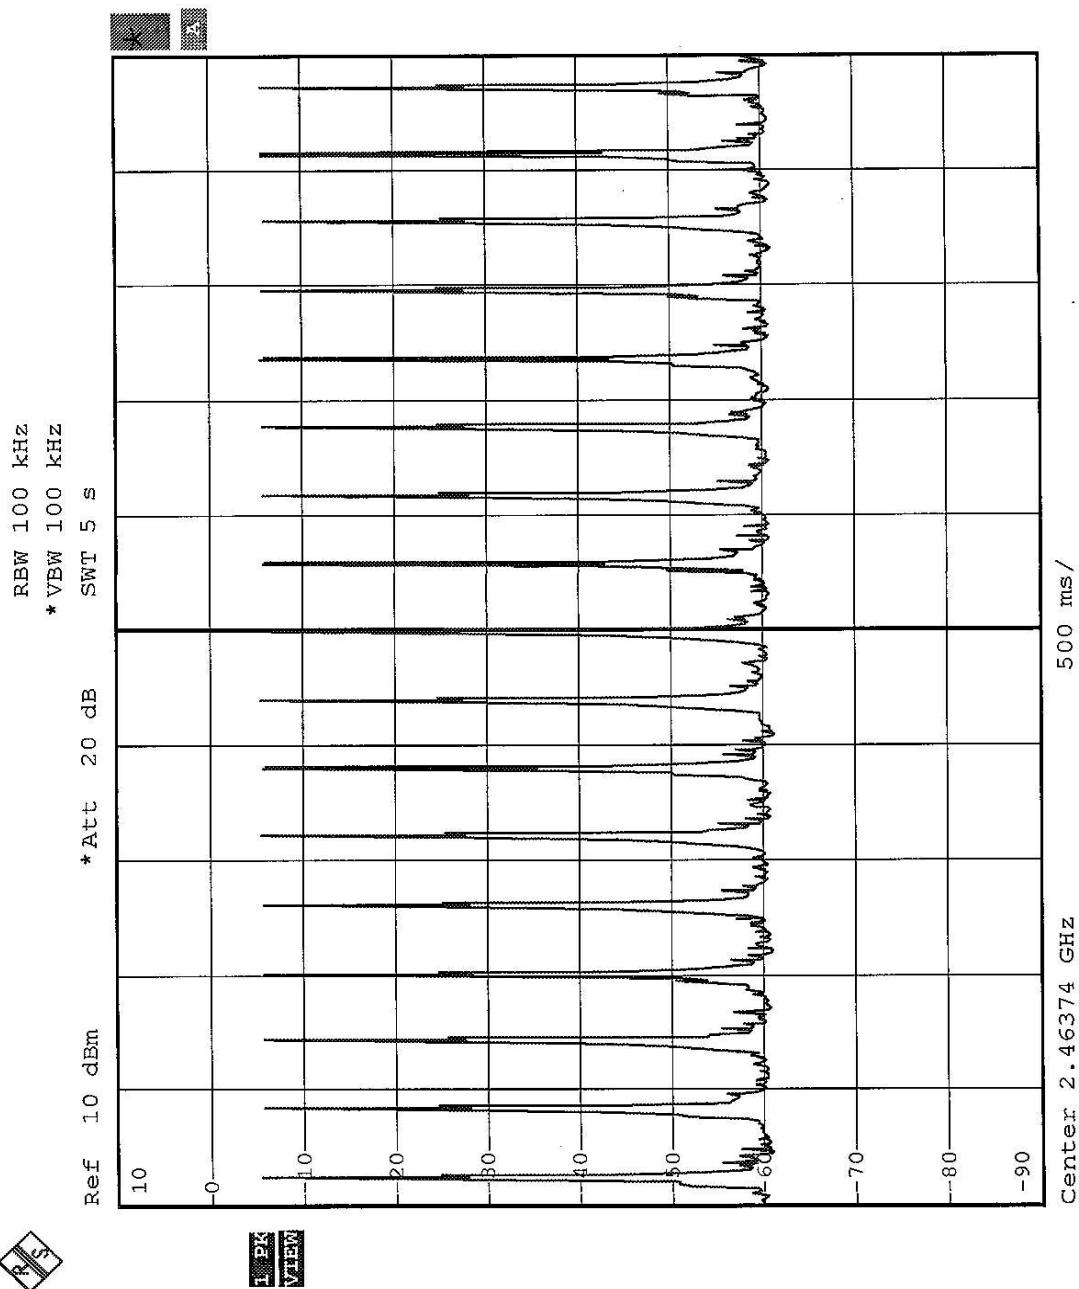

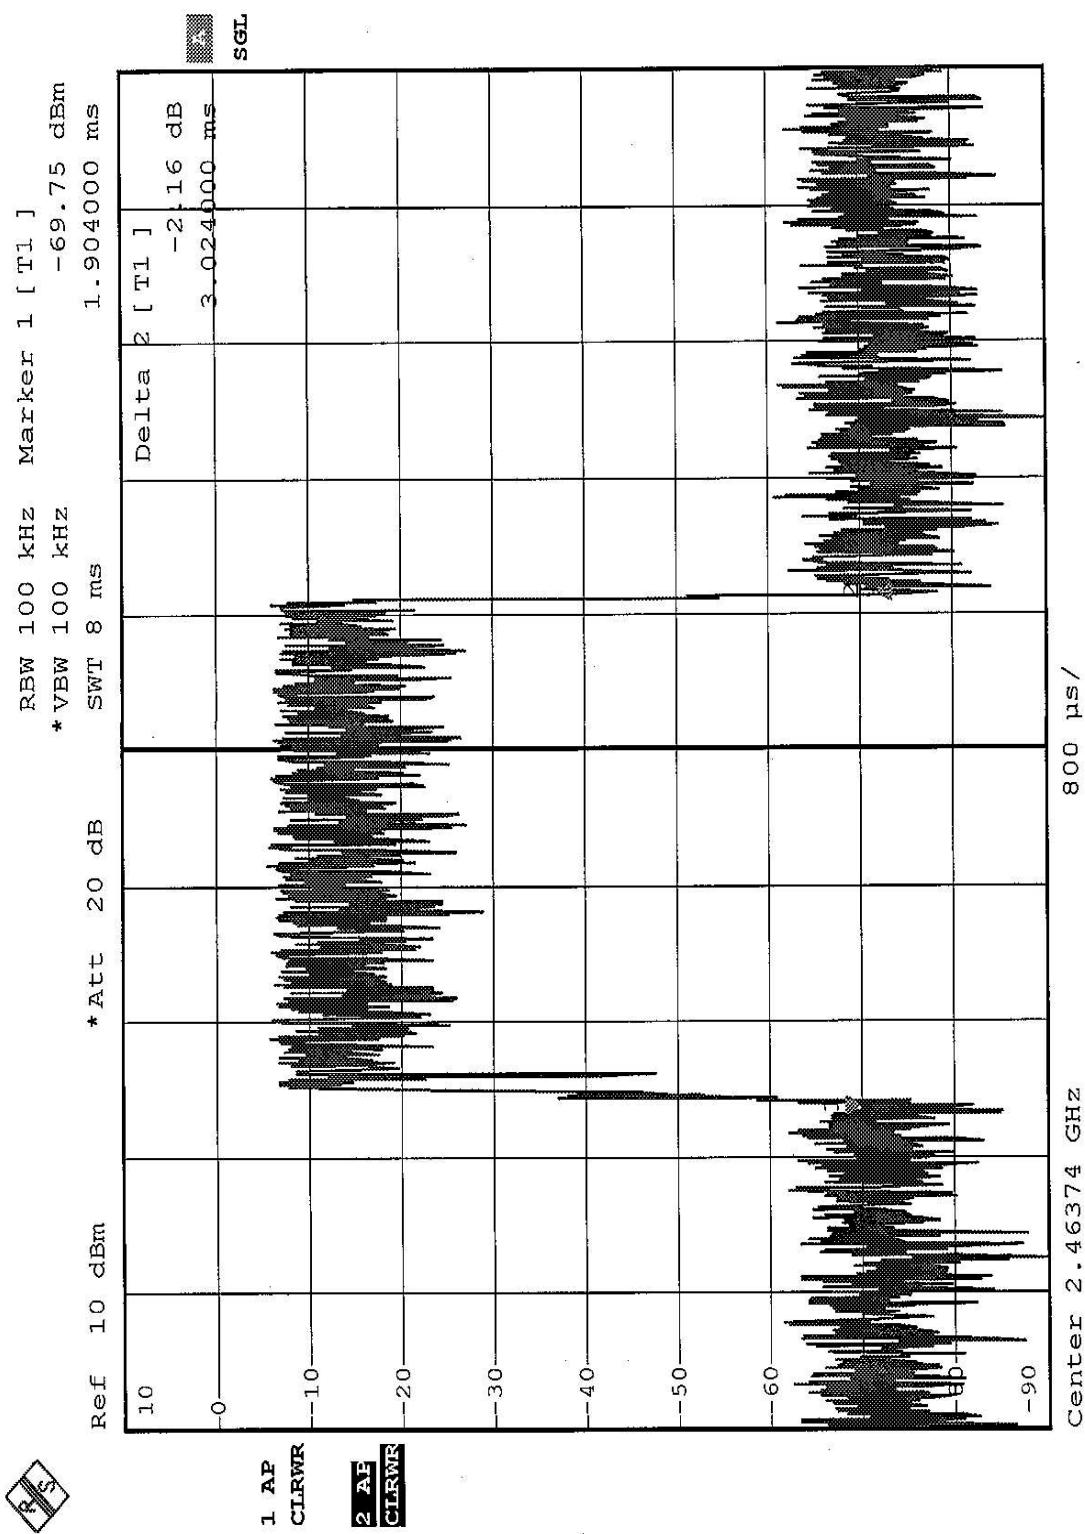



## 4.4 CHANNEL BANDWIDTH

### 4.4.1 LIMITS OF CHANNEL BANDWIDTH

For frequency hopping system operating in the 2400-2483.5 MHz and 5725-5850 MHz bands, the maximum 20 dB bandwidth of the hopping channel is 1 MHz.

### 4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

#### NOTES:

The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.


#### 4.4.3 TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

#### 4.4.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.4.5 TEST SETUP

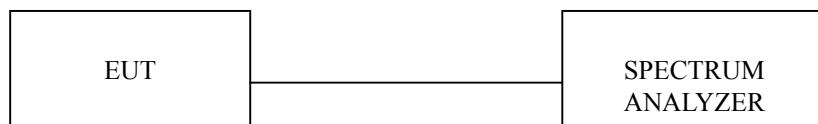


#### 4.4.6 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.


## 4.4.7 TEST RESULTS

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (kHz)	MAXIMUM LIMIT (MHz)	PASS/FAIL
0	2402	830	1	PASS
39	2441	840	1	PASS
78	2480	840	1	PASS


## Channel 0

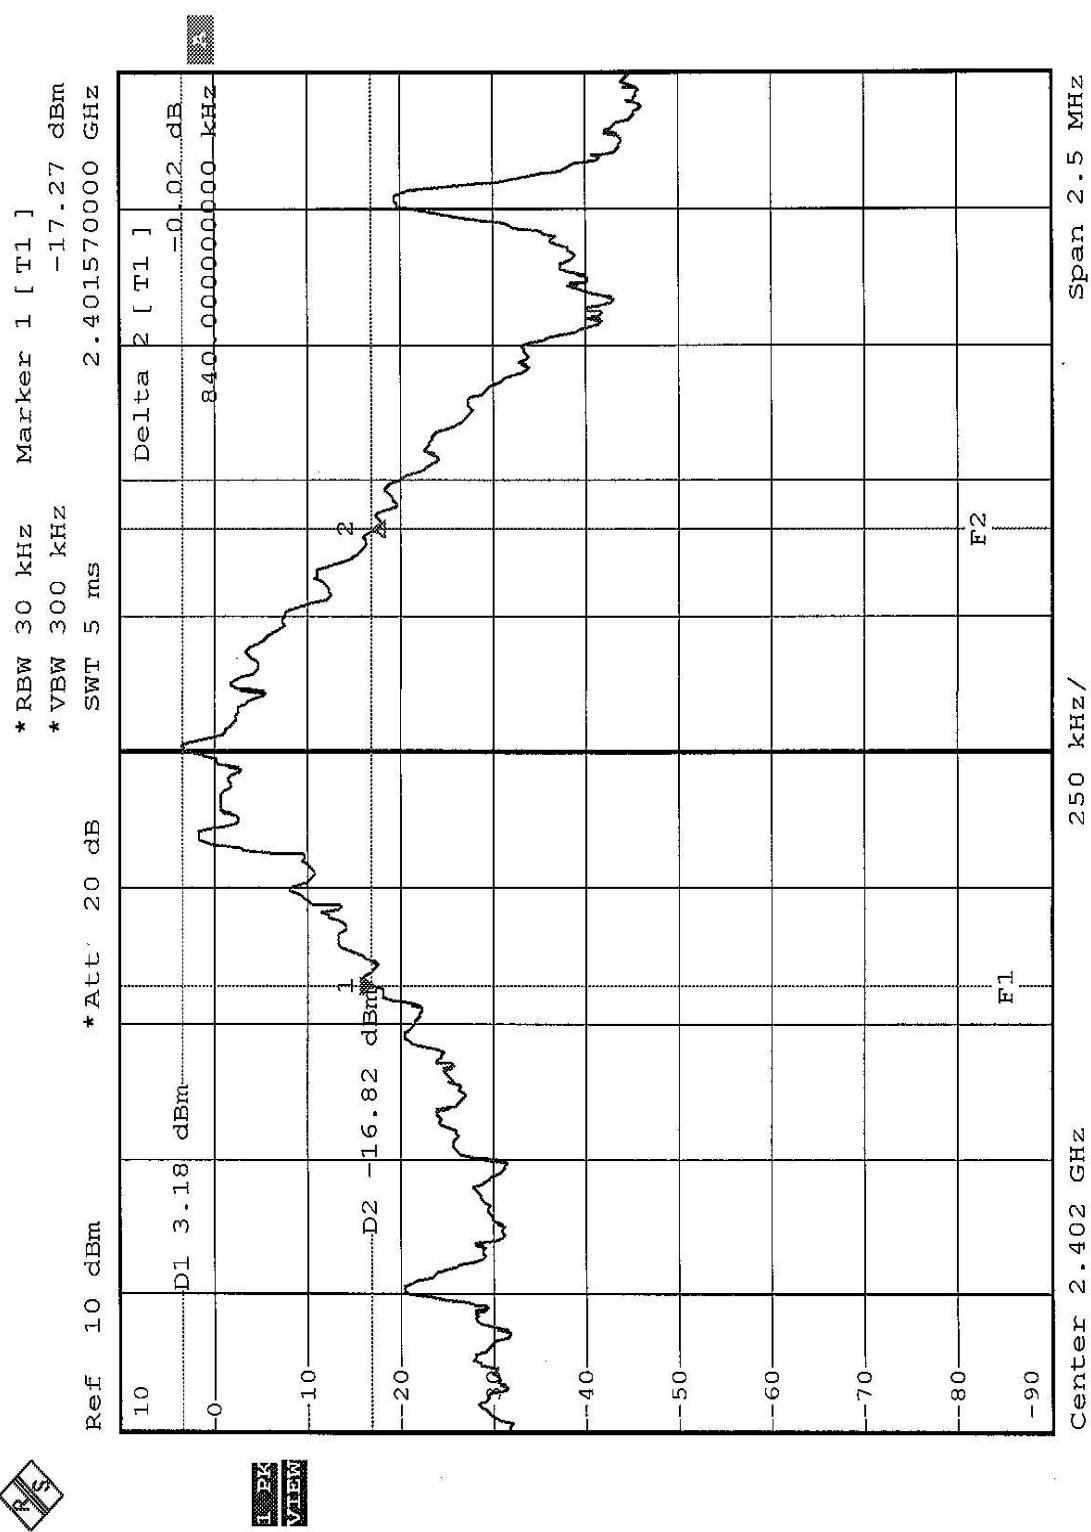

## Channel 39

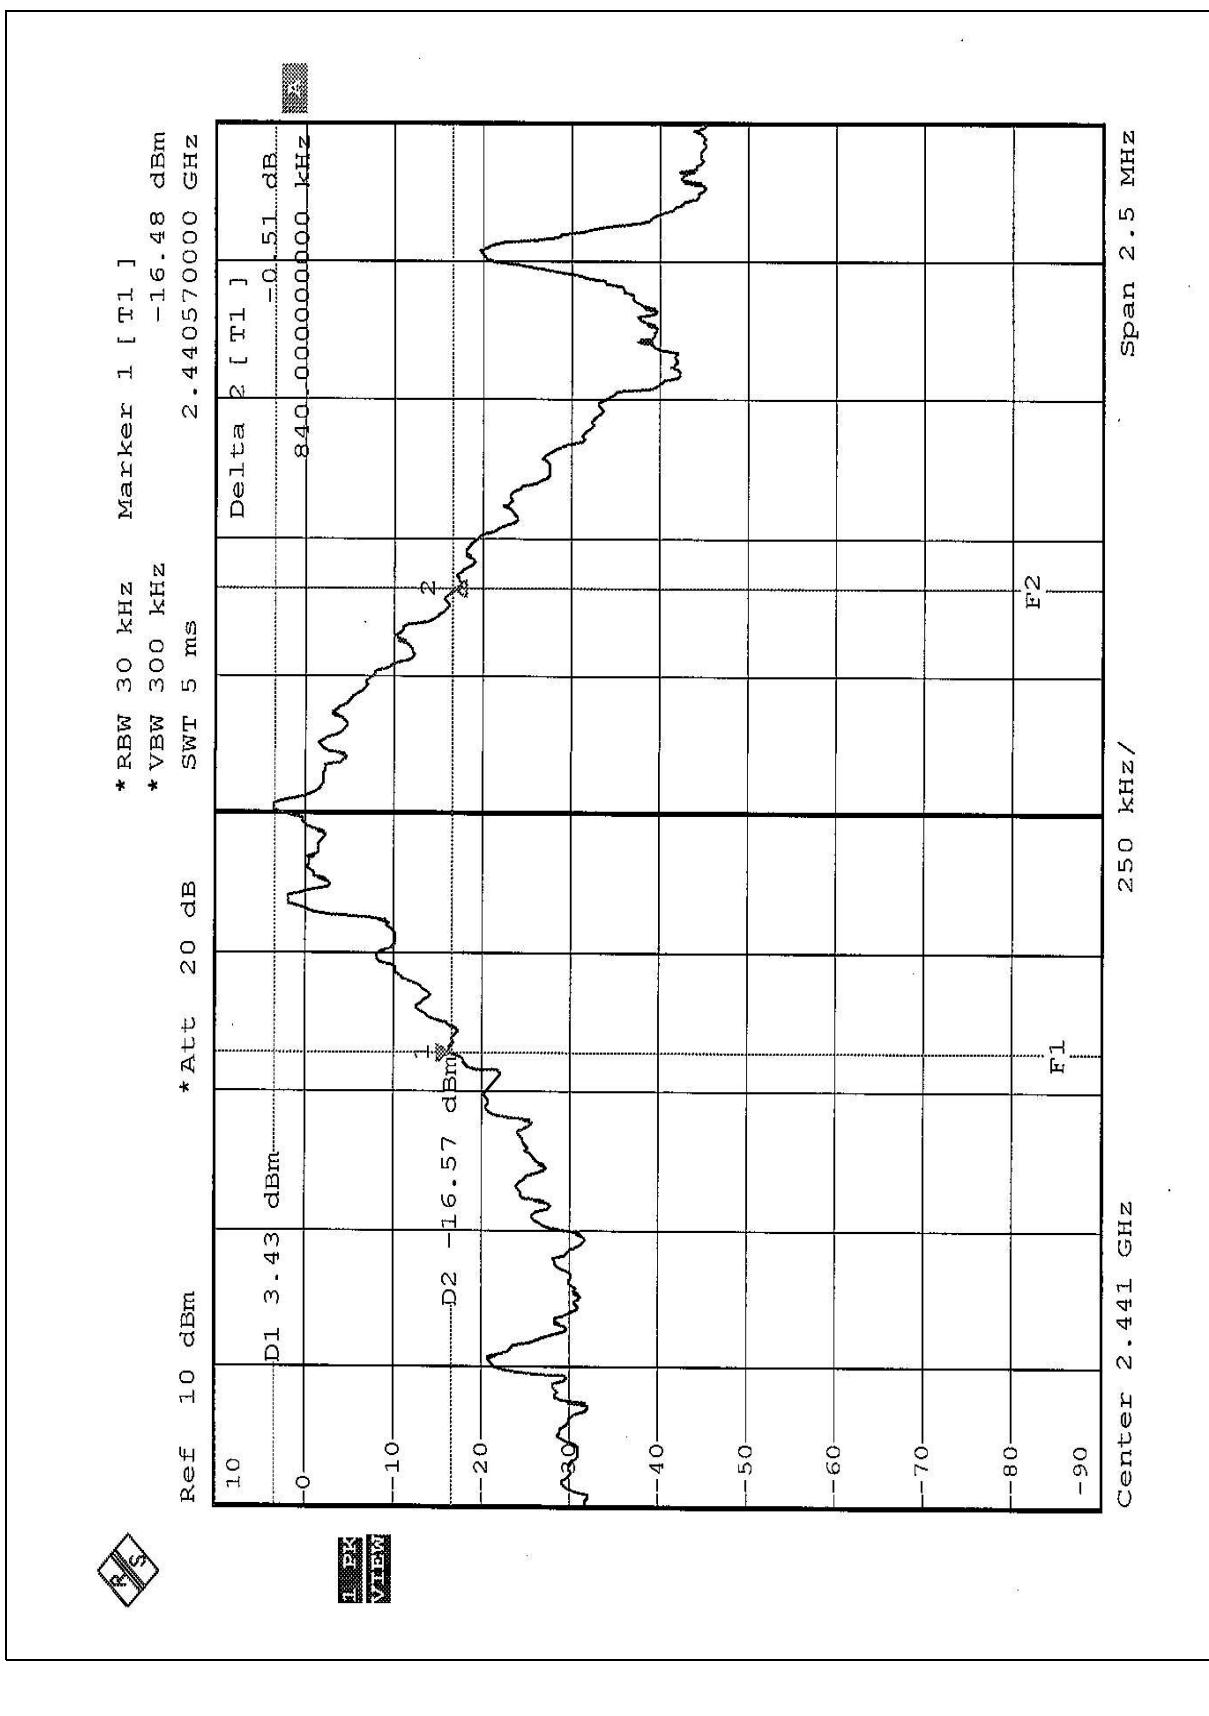

Channel 78

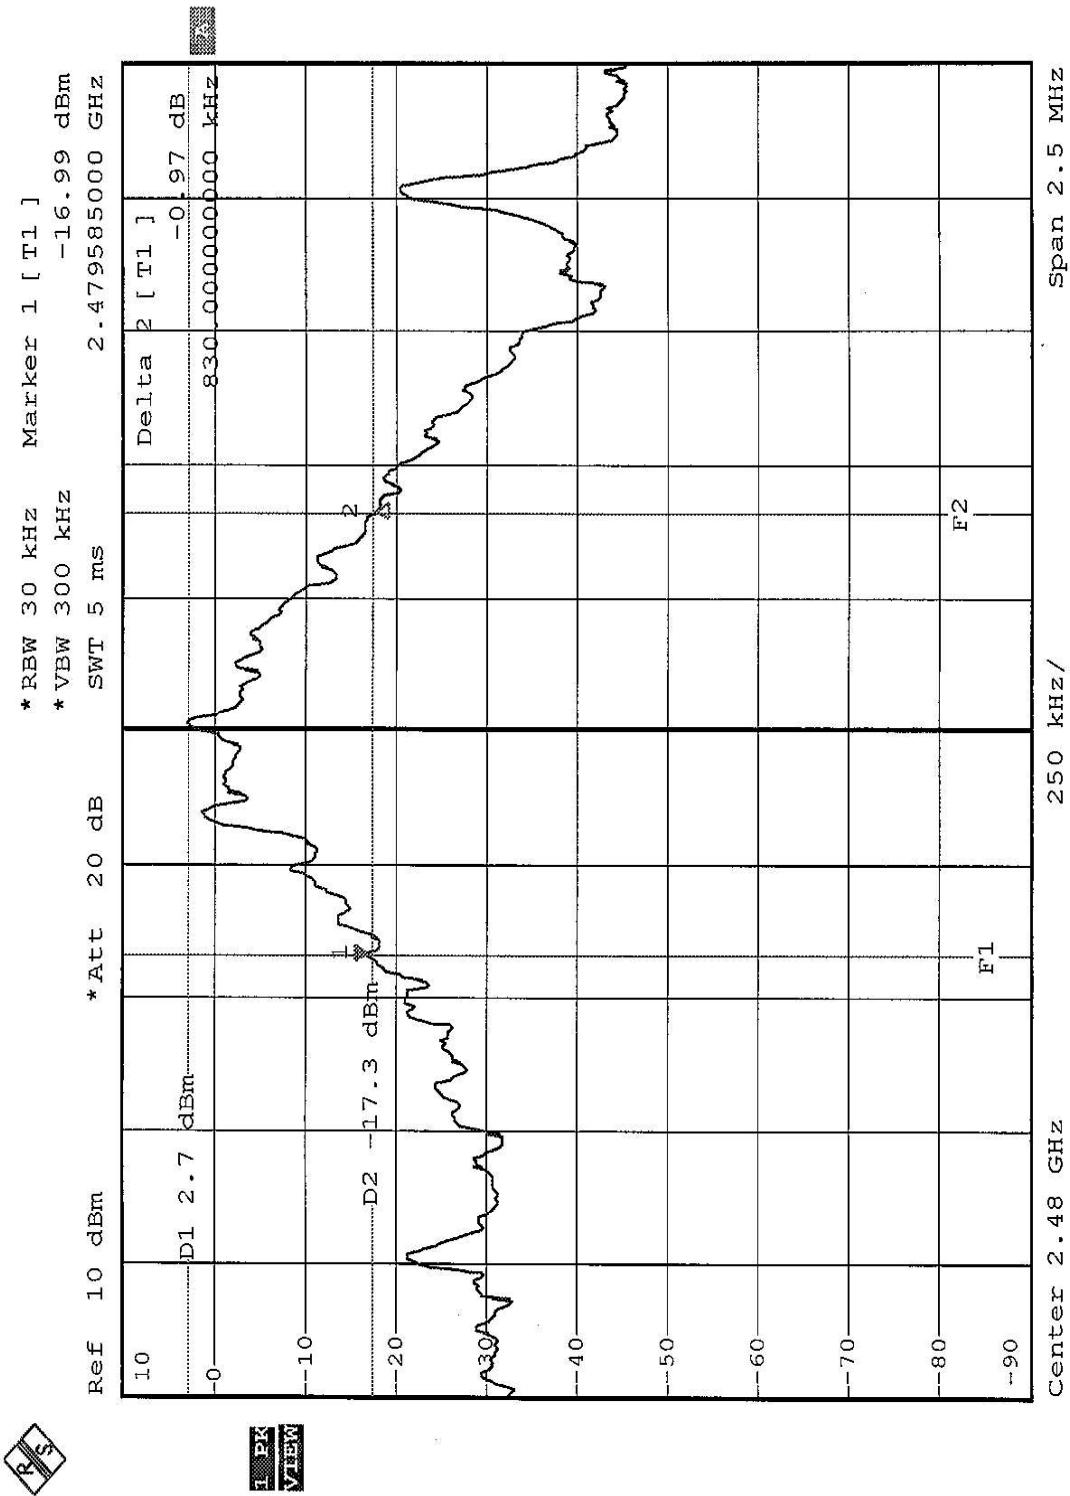



## 4.5 HOPPING CHANNEL SEPARATION

### 4.5.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25KHz or 20dB bandwidth (whichever is greater).

### 4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

#### NOTES:

The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.


#### 4.5.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

#### 4.5.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.5.5 TEST SETUP

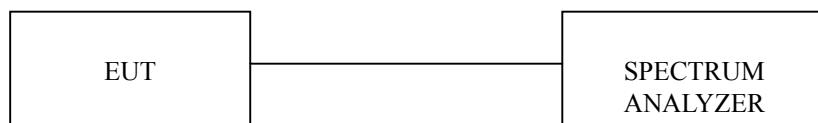

#### 4.5.6 TEST RESULTS

Channel	Frequency (MHz)	Adjacent Channel Separation	Minimum Limit (kHz)	Pass / Fail
0	2402	1.005 MHz	1000	PASS
39	2441	1.005 MHz	1000	PASS
78	2480	1.005 MHz	1000	PASS

The minimum limit is 20dB bandwidth. Test results please refer to next three pages.