

RADIO TEST REPORT

FCC 47 CFR PART 15 SUBPART C

Test Standard	FCC Part 15.247
Product name	IOT BLE Mini Gateway
Brand Name	CC&C
Model No.	WG-1000DB
Test Result	Pass
Statements of Conformity	Determination of compliance is based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10: 2013 and compliance standards.

The test results of this report relate only to the tested sample (EUT) identified in this report.


The test Report of full or partial shall not copy. Without written approval of Compliance Certification Services Inc. (Wugu Laboratory)

Approved by:

Tested by:



Kevin Tsai
Deputy Manager



Dally Hong
Engineer

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部分複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: T190401W01-RP2

Page 2 / 60

Rev. 01

Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	October 18, 2019	Initial Issue	ALL	Allison Chen
01	October 31, 2019	See the following Note Rev. (01)	P.29-31 、 P.33	May Lin

Rev (01):

- 1. Revised the section 4.5.4*



Report No.: T190401W01-RP2

Page 3 / 60

Rev. 01

Table of contents

1.	GENERAL INFORMATION	4
1.1	EUT INFORMATION	4
1.2	EUT CHANNEL INFORMATION	5
1.3	ANTENNA INFORMATION	5
1.4	MEASUREMENT UNCERTAINTY	6
1.5	FACILITIES AND TEST LOCATION	7
1.6	INSTRUMENT CALIBRATION	7
1.7	SUPPORT AND EUT ACCESSORIES EQUIPMENT	9
1.8	TEST METHODOLOGY AND APPLIED STANDARDS	9
2.	TEST SUMMERY	10
3.	DESCRIPTION OF TEST MODES.....	11
3.1	THE WORST MODE OF OPERATING CONDITION	11
3.2	THE WORST MODE OF MEASUREMENT	12
3.3	EUT DUTY CYCLE	13
4.	TEST RESULT	14
4.1	AC POWER LINE CONDUCTED EMISSION	14
4.2	6dB BANDWIDTH AND OCCUPIED BANDWIDTH(99%).....	17
4.3	OUTPUT POWER MEASUREMENT	22
4.4	POWER SPECTRAL DENSITY	24
4.5	CONDUCTED BAND EDGE AND SPURIOUS EMISSION	28
4.6	RADIATION BANDEDGE AND SPURIOUS EMISSION	35
APPENDIX 1 - PHOTOGRAPHS OF EUT		



Report No.: T190401W01-RP2

Page 4 / 60

Rev. 01

1. GENERAL INFORMATION

1.1 EUT INFORMATION

Applicant	CC&C Technologies, Inc. 8F, No. 150, Jian Yi Road, Zhonghe District, New Taipei City, 235 Taiwan
Manufacturer	Kunshan CC&C Technologies, Co., Ltd No.9 building,3rd Main Street, Kunshan Free Trade Zone, Jiangsu Province, P.R.China
Equipment	IOT BLE Mini Gateway
Model No.	WG-1000DB
Model Discrepancy	N/A
Trade Name	CC&C
Received Date	April 1, 2019
Date of Test	July 23 ~ October 28, 2019
Output Power (W)	BLE-1Mbps: 0.0115 BLE-2Mbps: 0.0094
Power Supply	Powered from host device via USB Cable.



Report No.: T190401W01-RP2

Page 5 / 60

Rev. 01

1.2 EUT CHANNEL INFORMATION

Frequency Range	2402MHz-2480MHz
Modulation Type	Bluetooth 4.0: GFSK for BLE-1Mbps Bluetooth 5.0: GFSK for BLE-2Mbps
Number of channels	40 Channels

Remark:

Refer as ANSI C63.10: 2013 clause 5.6.1 Table 4 for test channels

Number of frequencies to be tested		
Frequency range in which device operates	Number of frequencies	Location in frequency range of operation
☐ 1 MHz or less	1	Middle
☐ 1 MHz to 10 MHz	2	1 near top and 1 near bottom
☒ More than 10 MHz	3	1 near top, 1 near middle, and 1 near bottom

1.3 ANTENNA INFORMATION

Antenna Type	☐ PIFA ☐ PCB ☐ Dipole ☒ Chip
Antenna Gain	Gain: 0dBi
Antenna Connector	N/A



Report No.: T190401W01-RP2

Page 6 / 60

Rev. 01

1.4 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	+/- 1.2575
Emission bandwidth, 20dB bandwidth	+/- 0.0014
RF output power, conducted	+/- 1.14
Power density, conducted	+/- 1.40
3M Semi Anechoic Chamber / 30M~200M	+/- 4.12
3M Semi Anechoic Chamber / 200M~1000M	+/- 4.68
3M Semi Anechoic Chamber / 1G~8G	+/- 5.18
3M Semi Anechoic Chamber / 8G~18G	+/- 5.47
3M Semi Anechoic Chamber / 18G~26G	+/- 3.81
3M Semi Anechoic Chamber / 26G~40G	+/- 3.87

Remark:

1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$
2. ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report.

1.5 FACILITIES AND TEST LOCATION

All measurement facilities used to collect the measurement data are located at No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.)

Test site	Test Engineer	Remark
AC Conduction Room	Dally Hong	-
Radiation	Dally Hong	-
RF Conducted	Dally Hong	-

Remark: The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

1.6 INSTRUMENT CALIBRATION

RF Conducted Test Site					
Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Coaxial Cable	Woken	WC12	CC001	06/28/2019	06/27/2020
EXA Signal Analyzer	KEYSIGHT	N9010B	MY55460167	07/31/2019	07/30/2020
Thermostatic/Humidity Chamber	GWINSTEK	GTC-288MH-CC	TH160402	05/16/2019	05/15/2020
Software	N/A				

For Section 3.3: EUT Duty Cycle

RF Conducted Test Site					
Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Coaxial Cable	Woken	WC12	CC001	06/28/2019	06/27/2020
EXA Signal Analyzer	KEYSIGHT	N9010B	MY55460167	08/01/2018	07/31/2019
Thermostatic/Humidity Chamber	GWINSTEK	GTC-288MH-CC	TH160402	05/16/2019	05/15/2020
Software	N/A				

3M 966 Chamber Test Site					
Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Bilog Antenna	Sunol Sciences	JB3	A030105	07/26/2019	07/25/2020
Coaxial Cable	HUBER SUHNER	SUCOFLEX 104PEA	20995	02/26/2019	02/25/2020
Coaxial Cable	EMCI	EMC105	190914+25111	09/20/2019	09/19/2020
Digital Thermo-Hygro Meter	WISEWIND	1206	D07	01/30/2019	01/29/2020
High Pass Filters	MICRO TRONICS	HPM13195	003	02/26/2019	02/25/2020
Horn Antenna	ETS LINDGREN	3116	00026370	12/26/2018	12/25/2019
Horn Antenna	ETS LINDGREN	3117	00143280	07/16/2019	07/15/2020
Loop Ant	COM-POWER	AL-130	121051	03/22/2019	03/21/2020
Pre-Amplifier	EMEC	EM330	060609	02/26/2019	02/25/2020
Pre-Amplifier	HP	8449B	3008A00965	02/26/2019	02/25/2020
Pre-Amplifier	MITEQ	AMF-6F-260400-40-8P	985646	02/26/2019	02/25/2020
PSA Series Spectrum Analyzer	Agilent	E4446A	MY46180323	05/29/2019	05/28/2020
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R
Software	e3 6.11-20180413				

AC-line Conduction Test Room					
Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
CABLE	EMCI	CFD300-NL	CERF	06/27/2019	06/26/2020
EMI Test Receiver	R&S	ESCI	100064	07/26/2019	07/25/2020
LISN	SCHWARZBECK	NSLK 8127	8127-541	01/31/2019	01/30/2020
LISN	SCHAFFNER	NNB 41	03/10013	02/13/2019	02/12/2020
Software	EZ-EMC(CCS-3A1-CE-wugu)				

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. N.C.R. = No Calibration Required.



Report No.: T190401W01-RP2

Page 9 / 60

Rev. 01

1.7 SUPPORT AND EUT ACCESSORIES EQUIPMENT

EUT Accessories Equipment					
No.	Equipment	Brand	Model	Series No.	FCC ID
	N/A				

Support Equipment					
No.	Equipment	Brand	Model	Series No.	FCC ID
1	NB(J)	TOSHIBA	PT345T-00L002	N/A	PD97260H

1.8 TEST METHODOLOGY AND APPLIED STANDARDS

The test methodology, setups and results comply with all requirements in accordance with ANSI C63.10:2013, FCC Part 2, FCC Part 15.247, KDB 558074 D01.



Report No.: T190401W01-RP2

Page 10 / 60

Rev. 01

2. TEST SUMMERY

FCC Standard Section	Report Section	Test Item	Result
15.203	1.3	Antenna Requirement	Pass
15.207(a)	4.1	AC Conducted Emission	Pass
15.247(a)(2)	4.2	6 dB Bandwidth	Pass
-	4.2	Occupied Bandwidth (99%)	Pass
15.247(b)(3)	4.3	Output Power Measurement	Pass
15.247(e)	4.4	Power Spectral Density	Pass
15.247(d)	4.5	Conducted Spurious Emission	Pass
15.247(d)	4.5	Conducted Emission	Pass
15.247(d)	4.6	Radiation Band Edge	Pass
15.247(d)	4.6	Radiation Spurious Emission	Pass



Report No.: T190401W01-RP2

Page 11 / 60
Rev. 01

3. DESCRIPTION OF TEST MODES

3.1 THE WORST MODE OF OPERATING CONDITION

Operation mode	BLE Mode (1Mbps) BLE Mode (2Mbps)
Test Channel Frequencies	1.Lowest Channel : 2402MHz 2.Middle Channel : 2440MHz 3.Highest Channel : 2480MHz

Remark:

1. EUT pre-scanned data rate of output power for each mode, the worst data rate were recorded in this report.

3.2 THE WORST MODE OF MEASUREMENT

AC Power Line Conducted Emission	
Test Condition	AC Power line conducted emission for line and neutral
Power supply Mode	Mode 1: EUT power by host system
Worst Mode	☒ Mode 1 ☐ Mode 2 ☐ Mode 3 ☐ Mode 4

Radiated Emission Measurement Above 1G	
Test Condition	Radiated Emission Above 1G
Power supply Mode	Mode 1: EUT power by host system
Worst Mode	☒ Mode 1 ☐ Mode 2 ☐ Mode 3 ☐ Mode 4
Worst Position	☐ Placed in fixed position. ☒ Placed in fixed position at X-Plane (E2-Plane) ☐ Placed in fixed position at Y-Plane (E1-Plane) ☐ Placed in fixed position at Z-Plane (H-Plane)

Radiated Emission Measurement Below 1G	
Test Condition	Radiated Emission Below 1G
Power supply Mode	Mode 1: EUT power by host system
Worst Mode	☒ Mode 1 ☐ Mode 2 ☐ Mode 3 ☐ Mode 4

Remark:

1. The worst mode was record in this test report.
2. EUT pre-scanned in three axis ,X,Y, Z for radiated measurement. The worst case(X-Plane) were recorded in this report
3. AC power line conducted emission and for below 1G radiation emission were performed the EUT transmit at the highest output power channel as worse case.

3.3 EUT DUTY CYCLE

Duty Cycle				
Configuration	Duty Cycle (%)	Duty Factor (dB)	1/T (kHz)	VBW Setting (kHz)
BLE-1Mbps	72.73 %	1.38	2.16	3.0
BLE-2Mbps	44.19 %	3.55	3.63	4.0



4. TEST RESULT

4.1 AC POWER LINE CONDUCTED EMISSION

4.1.1 Test Limit

According to §15.207(a),

Frequency Range (MHz)	Limits(dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50


* Decreases with the logarithm of the frequency.

4.1.2 Test Procedure

Test method Refer as ANSI C63.10: 2013 clause 6.2,

1. The EUT was placed above horizontal ground plane and 0.4m above vertical ground plane
2. EUT connected to the line impedance stabilization network (LISN)
3. Receiver set RBW of 9kHz and Detector Peak, and note as quasi-peak and average.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. Recorded Line for Neutral and Line.

4.1.3 Test Setup

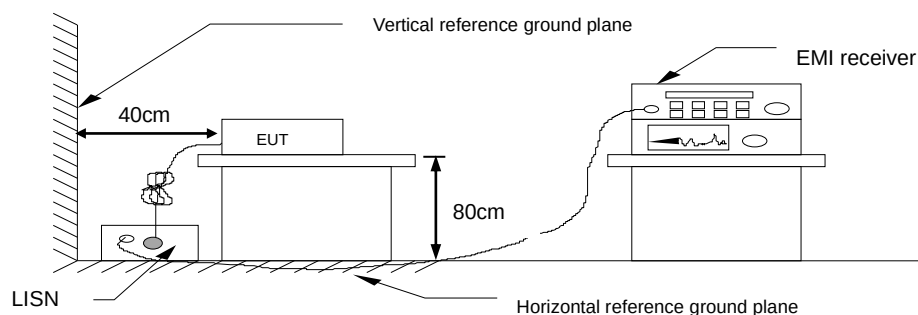


4.1.4 Test Result

PASS.


Test Data

Test Mode:	Mode 1	Temp/Hum	24(°C)/ 50%RH
Phase:	Line	Test Date	2019/10/09
		Test Engineer	Dally Hong

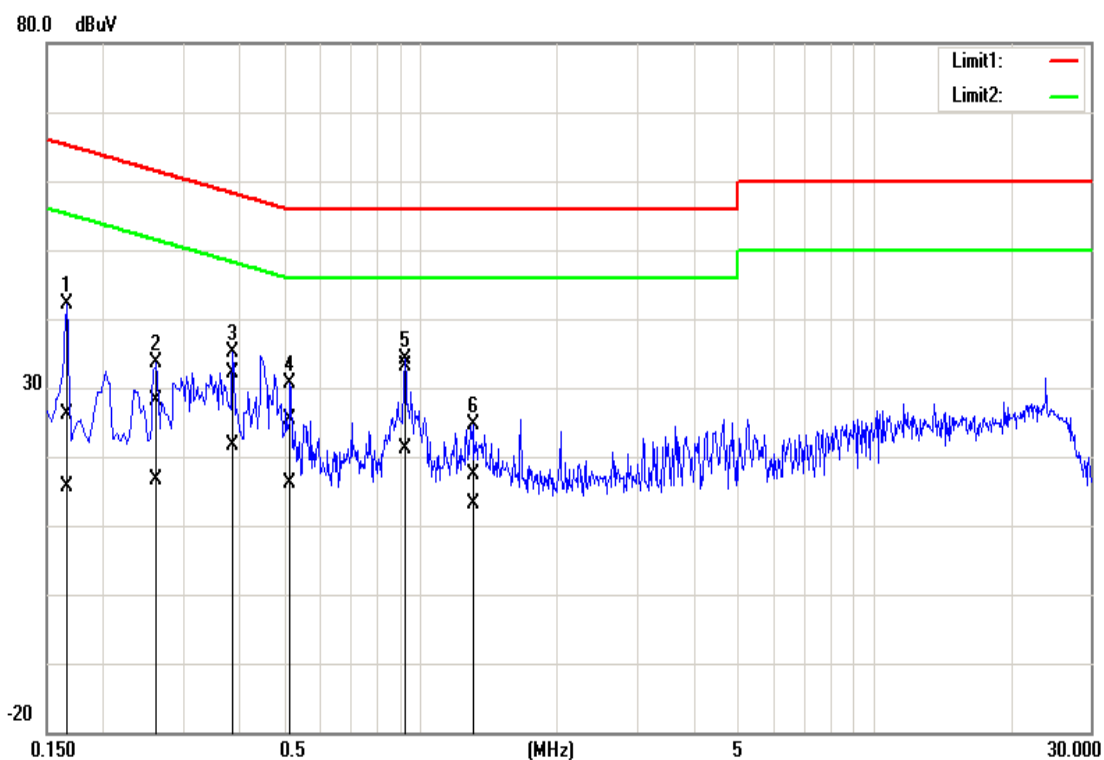

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)
1	0.1660	15.90	5.42	10.14	26.04	15.56	65.16	55.16	-39.12	-39.60
2	0.2620	17.90	6.54	10.13	28.03	16.67	61.37	51.37	-33.34	-34.70
3	0.3860	22.00	11.42	10.14	32.14	21.56	58.15	48.15	-26.01	-26.59
4	0.5180	15.19	6.00	10.14	25.33	16.14	56.00	46.00	-30.67	-29.86
5*	0.9260	22.88	11.06	10.17	33.05	21.23	56.00	46.00	-22.95	-24.77
6	1.3060	7.22	2.95	10.17	17.39	13.12	56.00	46.00	-38.61	-32.88

Test Mode:	Mode 1	Temp/Hum	24(°C)/ 50%RH
Phase:	Neutral	Test Date	2019/10/09
		Test Engineer	Dally Hong

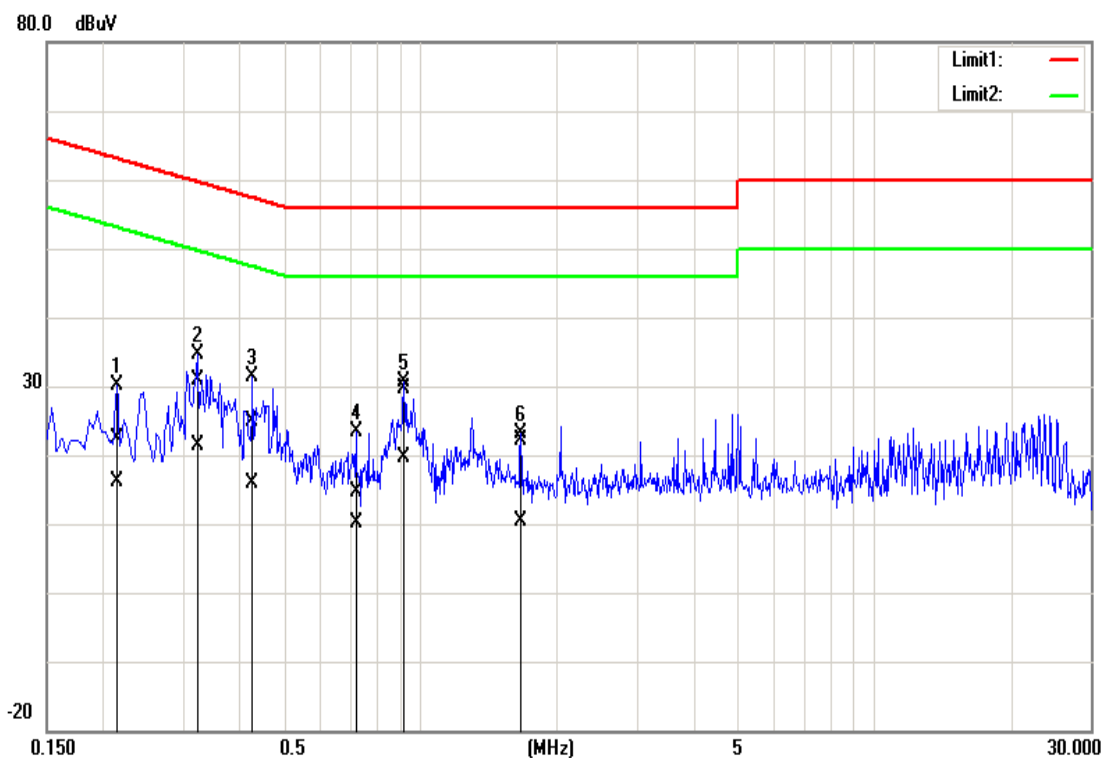

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)
1	0.2140	12.38	6.05	10.02	22.40	16.07	63.05	53.05	-40.65	-36.98
2	0.3220	20.96	11.37	10.03	30.99	21.40	59.66	49.66	-28.67	-28.26
3	0.4260	14.86	5.78	10.03	24.89	15.81	57.33	47.33	-32.44	-31.52
4	0.7220	4.52	0.14	10.04	14.56	10.18	56.00	46.00	-41.44	-35.82
5*	0.9220	19.53	9.47	10.04	29.57	19.51	56.00	46.00	-26.43	-26.49
6	1.6660	12.11	0.38	10.06	22.17	10.44	56.00	46.00	-33.83	-35.56

4.2 6dB BANDWIDTH AND OCCUPIED BANDWIDTH (99%)

4.2.1 Test Limit

According to §15.247(a)(2),

6 dB Bandwidth :

Limit	Shall be at least 500kHz
-------	--------------------------


Occupied Bandwidth(99%) : For reporting purposes only.

4.2.2 Test Procedure

Test method Refer as KDB 558074 D01 and ANSI C63.10: 2013 clause 6.9.2,

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT.
3. SA set RBW =100KHz, VBW = 300KHz and Detector = Peak, to measurement 6dB Bandwidth.
4. SA set RBW = 1% ~ 5% OBW, VBW = three times the RBW and Detector = Peak, to measurement 99% Bandwidth.
5. Measure and record the result of 6 dB Bandwidth and 99% Bandwidth. in the test report.


4.2.3 Test Setup

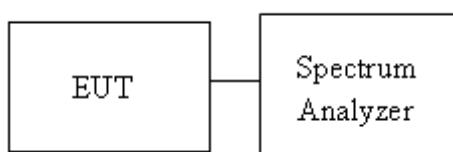


4.2.4 Test Result

Test mode: BLE-1Mbps mode / 2402-2480 MHz				
Channel	Frequency (MHz)	OBW (99%) (MHz)	6dB BW (MHz)	6dB limit (kHz)
Low	2402	1.1529	0.6736	>500
Mid	2440	1.1271	0.7252	
High	2480	1.1624	0.7356	
Test mode: BLE-2Mbps mode / 2402-2480 MHz				
Low	2402	1.8638	1.161	>500
Mid	2440	1.8584	1.187	
High	2480	1.8812	1.174	

6dB BANDWIDTH Test Data

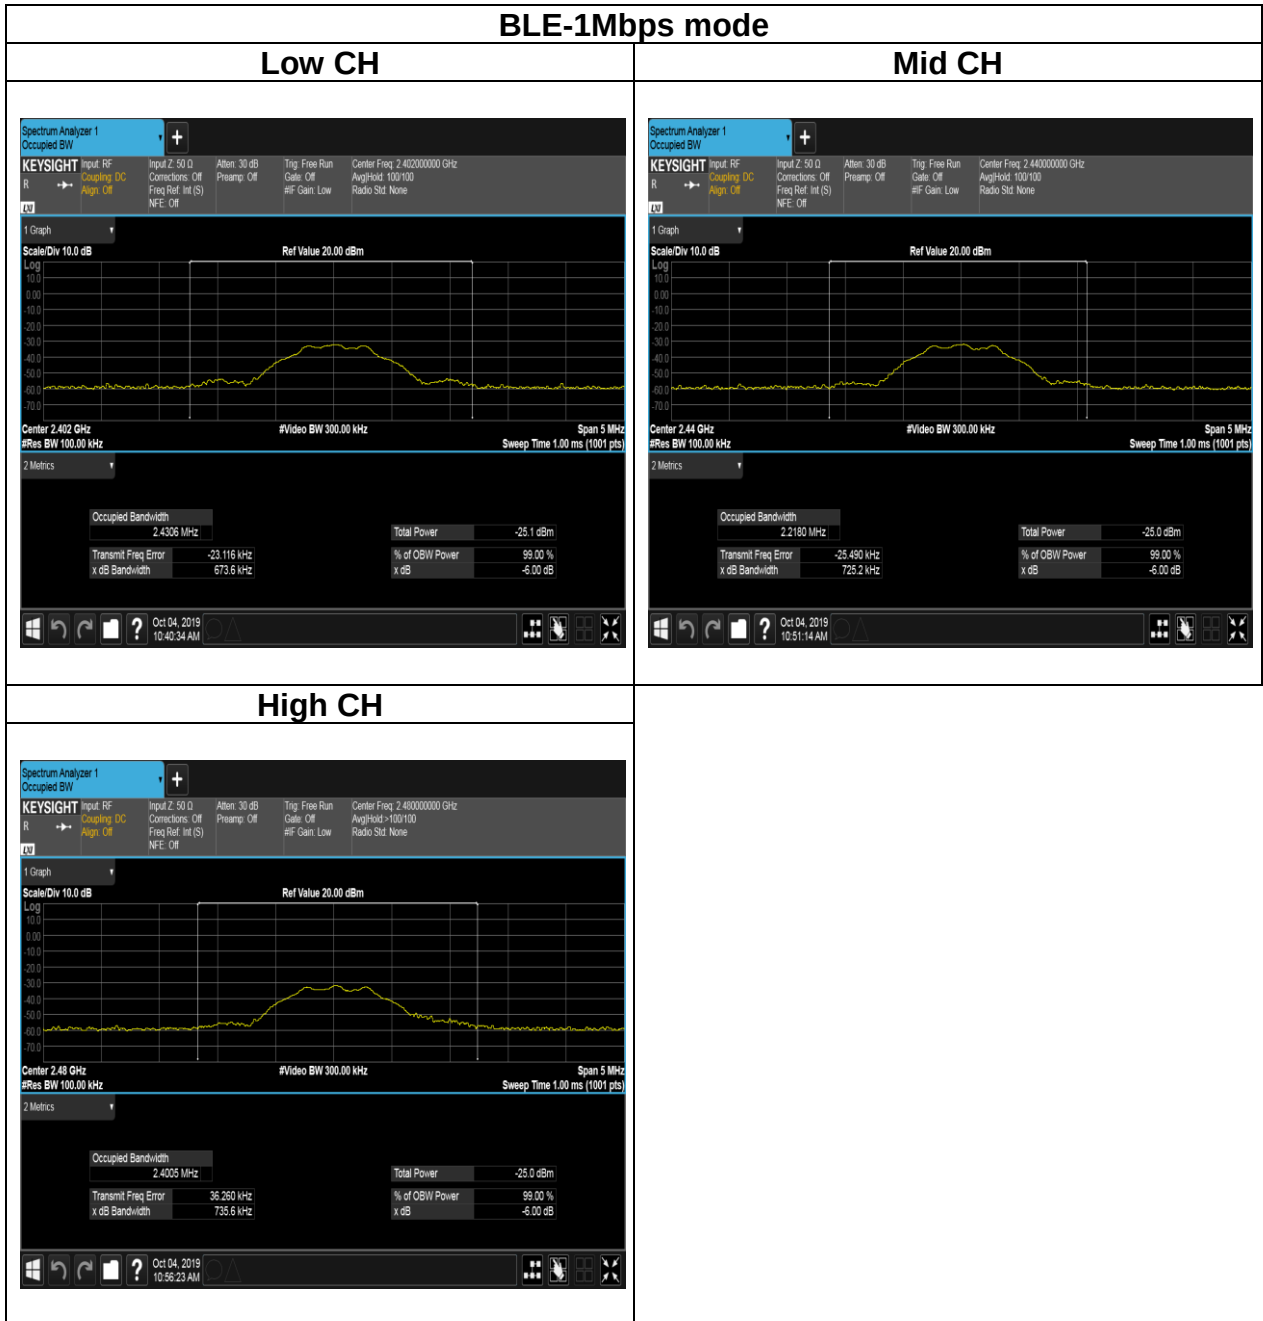

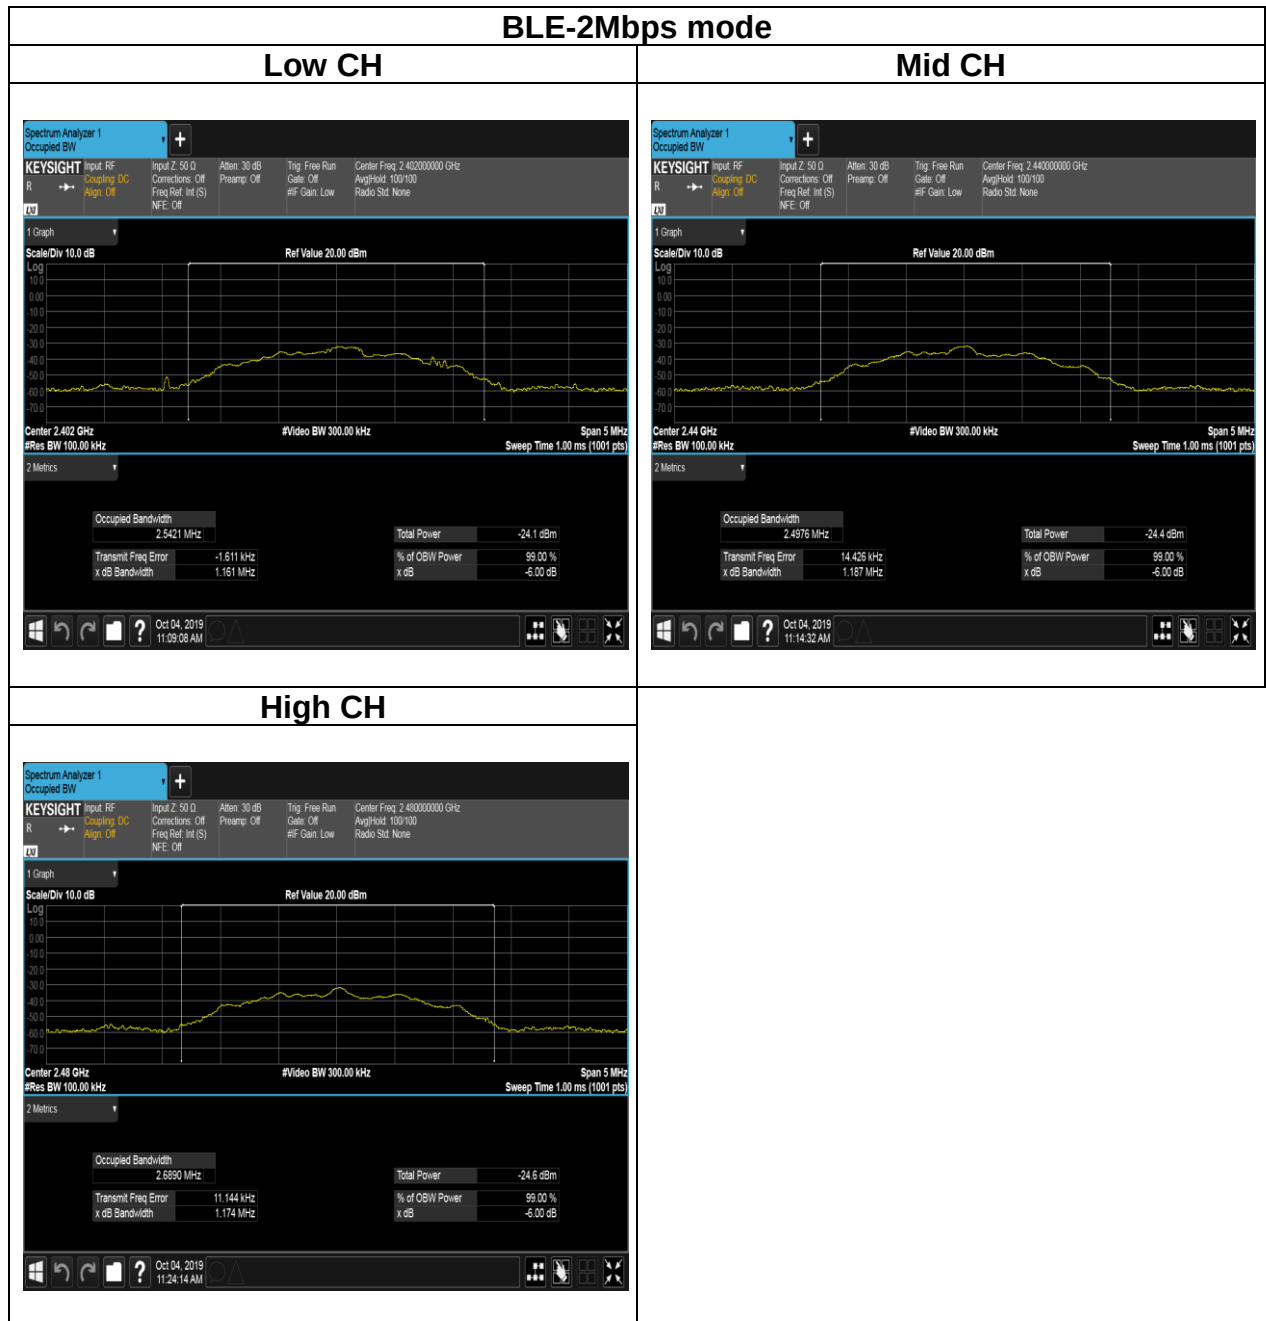





Report No.: T190401W01-RP2

Page 20 / 60
Rev. 01

BANDWIDTH (99%) Test Data

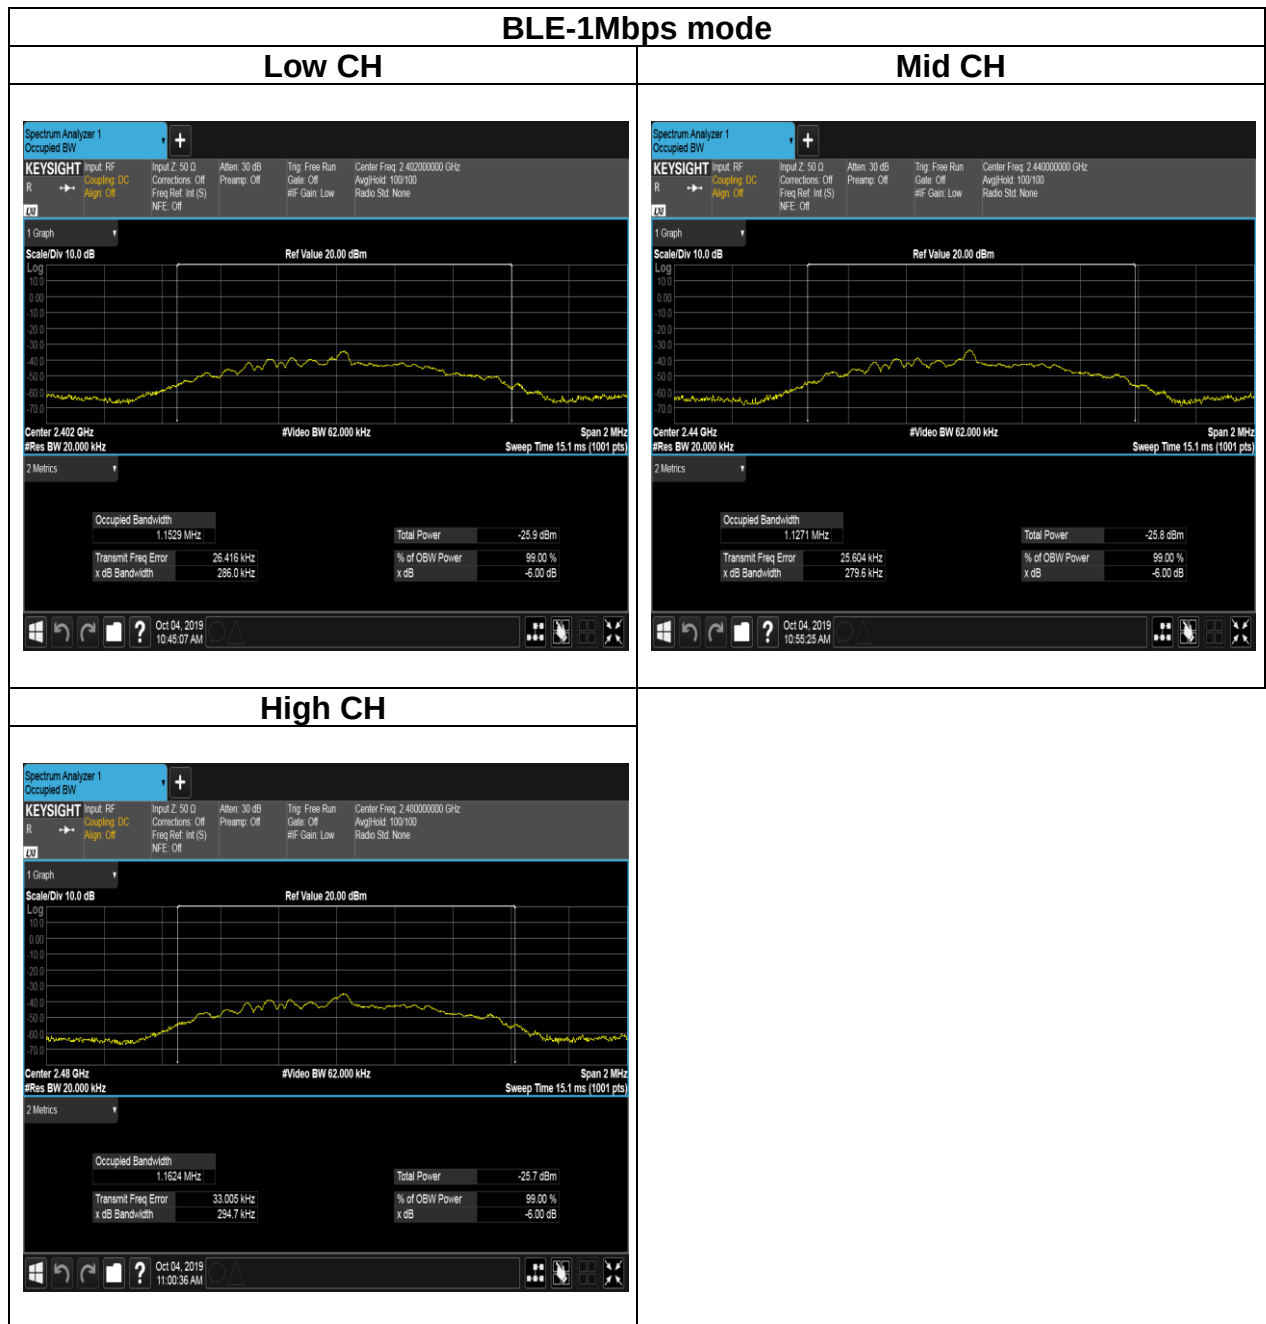

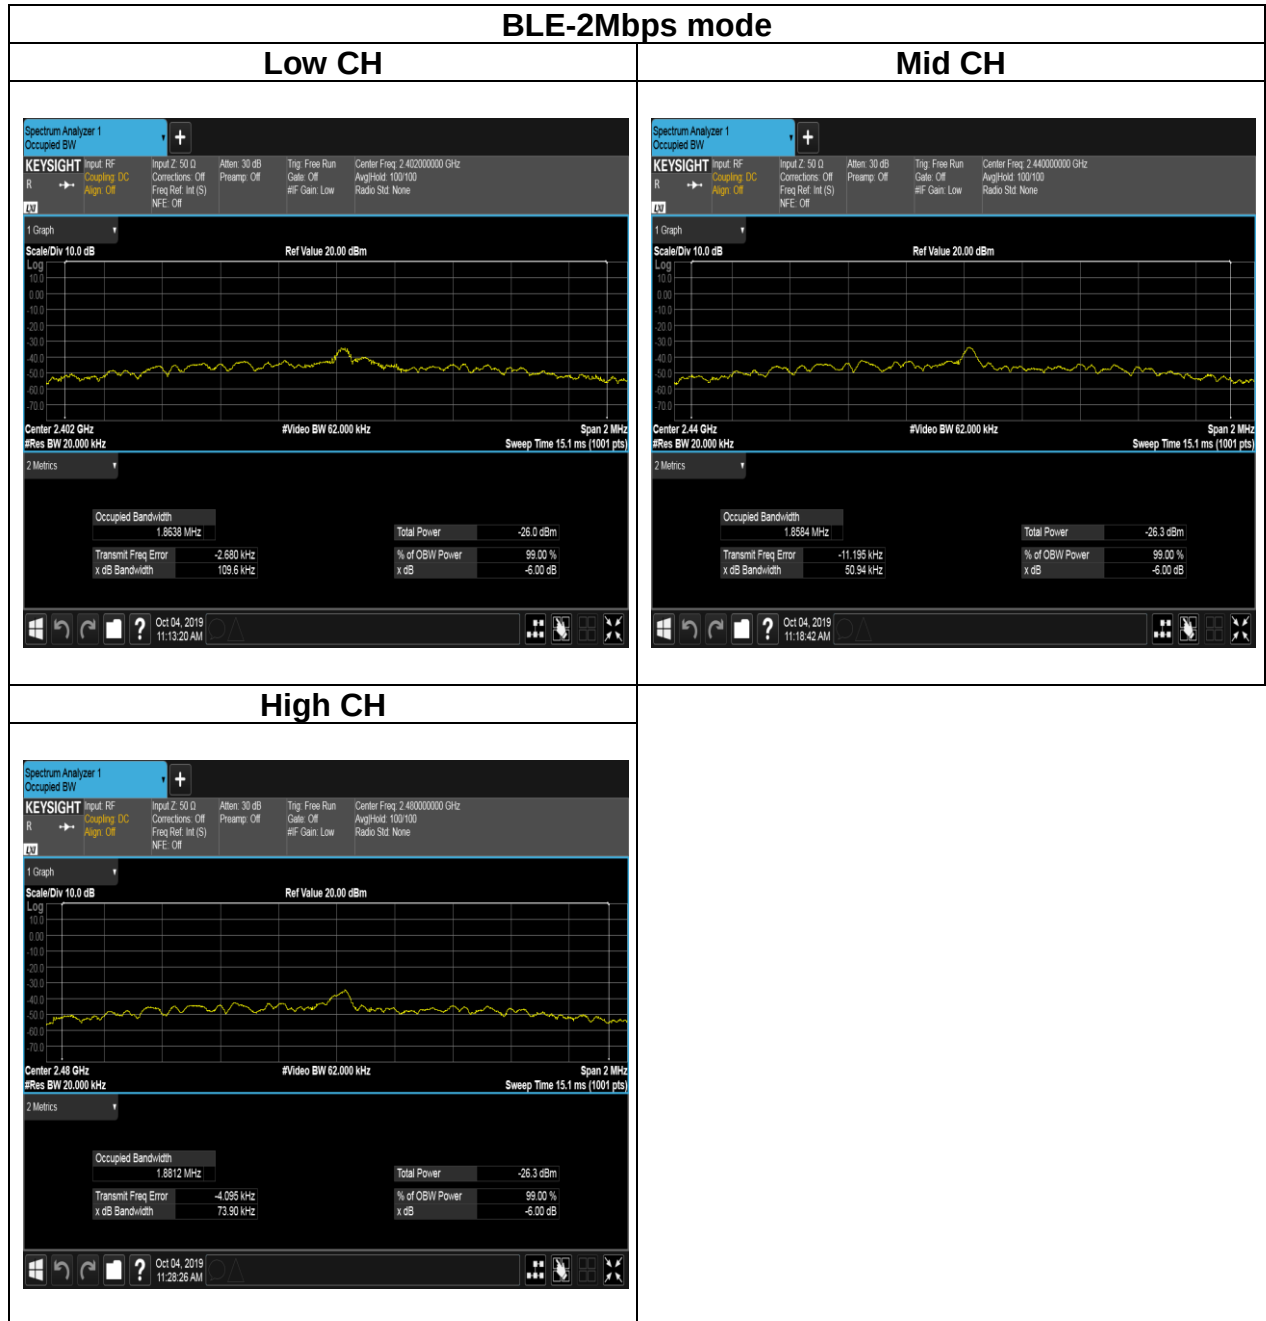

4.3 OUTPUT POWER MEASUREMENT

4.3.1 Test Limit

According to §15.247(b)(3).

Peak output power :

For systems using digital modulation in the 2400-2483.5 MHz: 1 Watt(30 dBm), base on the use of antennas with directional gain not exceed 6 dBi If transmitting antennas of directional gain greater than 6dBi are used the peak output power the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Limit	☒ Antenna not exceed 6 dBi : 30dBm ☐ Antenna with DG greater than 6 dBi [Limit = 30 – (DG – 6)] ☐ Point-to-point operation
-------	---


Average output power : For reporting purposes only.

4.3.2 Test Procedure

Test method Refer as KDB 558074 D01.

1. The EUT RF output connected to the power meter by RF cable.
2. Setting maximum power transmit of EUT.
3. The path loss was compensated to the results for each measurement.
4. Measure and record the result of Peak output power and Average output power. in the test report.

4.3.3 Test Setup



4.3.4 Test Result

Peak output power :

Config.	CH	Freq. (MHz)	Power Setting	PK Power (dBm)	PK Power (W)
BLE Data rate: 1Mbps	0	2402	Default	10.6	0.0115
	19	2440	Default	9.28	0.0085
	39	2480	Default	7.2	0.0052
BLE Data rate: 2Mbps	0	2402	Default	9.74	0.0094
	19	2440	Default	8.7	0.0074
	39	2480	Default	7.25	0.0053

Average output power :

BLE Mode			
Config.	CH	Freq. (MHz)	AV Power (dBm)
BLE Data rate: 1Mbps	0	2402	10.45
	19	2440	9.13
	39	2480	7.03
BLE Data rate: 2Mbps	0	2402	9.56
	19	2440	8.50
	39	2480	7.06

4.4 POWER SPECTRAL DENSITY

4.4.1 Test Limit

According to §15.247(e),

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


Limit	☒ Antenna not exceed 6 dBi : 8dBm ☐ Antenna with DG greater than 6 dBi [Limit = 8 – (DG – 6)] ☐ Point-to-point operation :
-------	---

4.4.2 Test Procedure

Test method Refer as KDB 558074 D01.

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW = 3kHz, VBW = 10kHz, Span = 1.5 times DTS Bandwidth (6 dB BW), Detector = Peak, Sweep Time = Auto and Trace = Max hold.
4. The path loss and Duty Factor were compensated to the results for each measurement by SA.
5. Mark the maximum level.
6. Measure and record the result of power spectral density. in the test report.

4.4.3 Test Setup





Report No.: T190401W01-RP2

Page 25 / 60

Rev. 01


4.4.4 Test Result

Test mode: BLE-1Mbps mode / 2402-2480 MHz			
Channel	Frequency (MHz)	PSD (dBm)	FCC limit (dBm)
Low	2402	-34.63	8
Mid	2440	-34.42	
High	2480	-35.65	

Test mode: BLE-2Mbps mode / 2402-2480 MHz			
Channel	Frequency (MHz)	PSD (dBm)	FCC limit (dBm)
Low	2402	-35.41	8
Mid	2440	-35.57	
High	2480	-36.42	

Report No.: T190401W01-RP2


Test Data

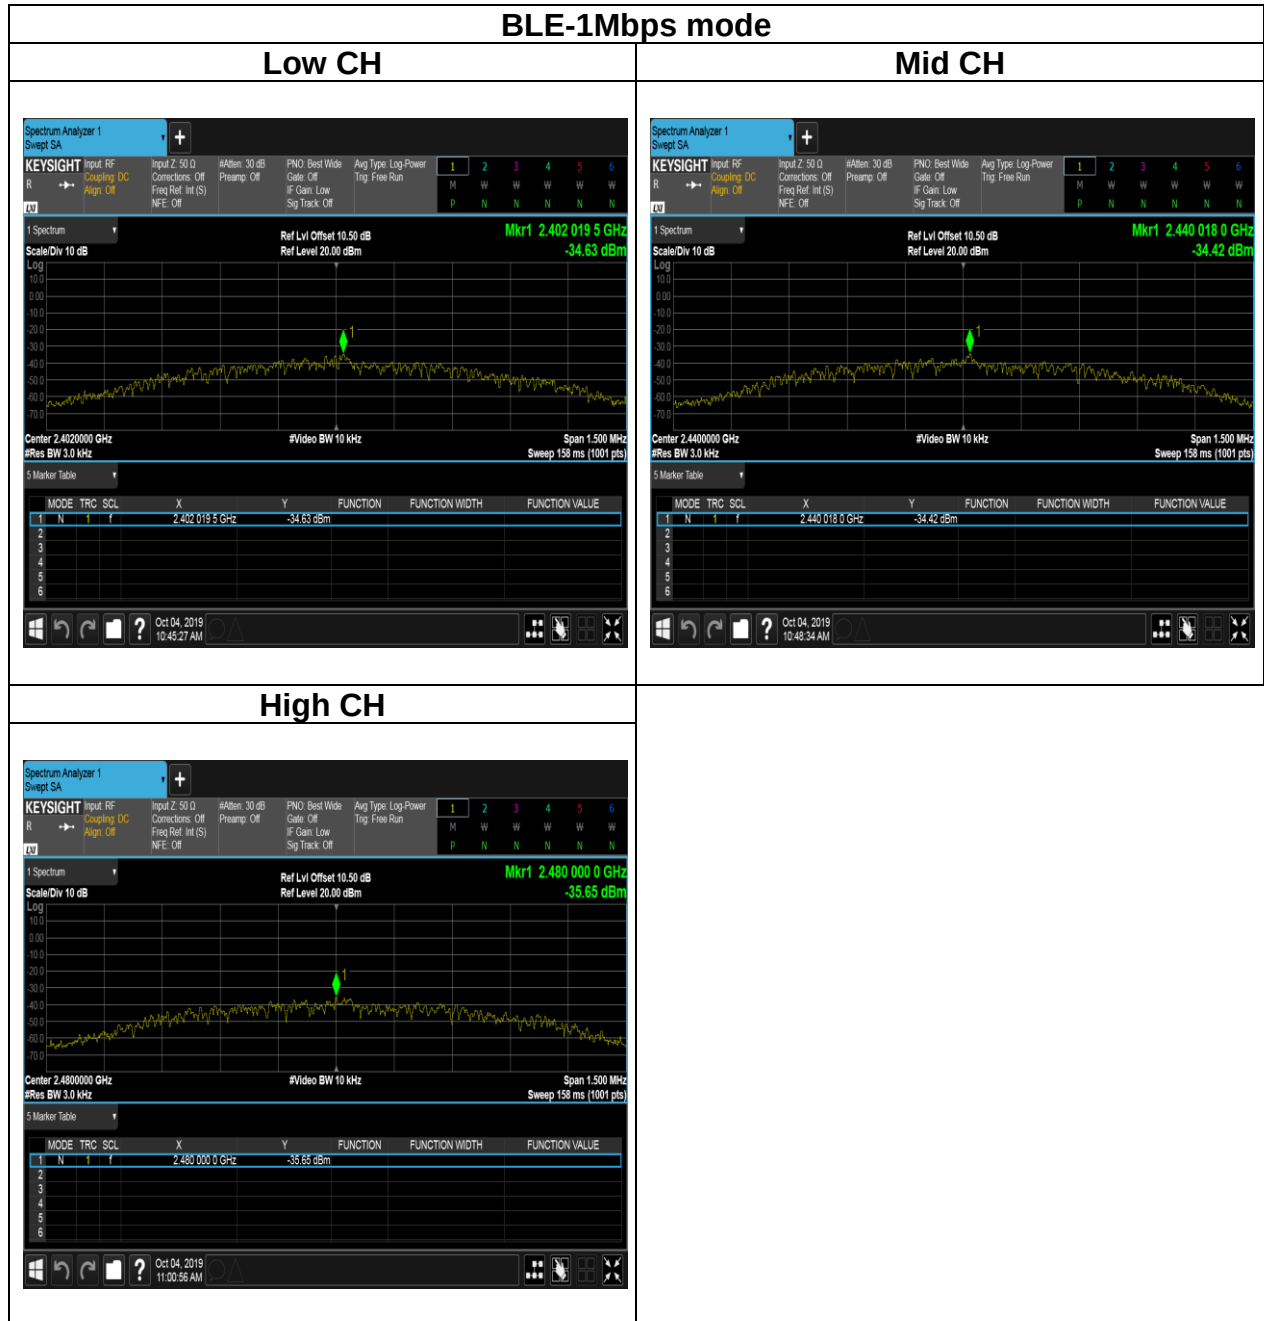



Report No.: T190401W01-RP2

Page 27 / 60
Rev. 01

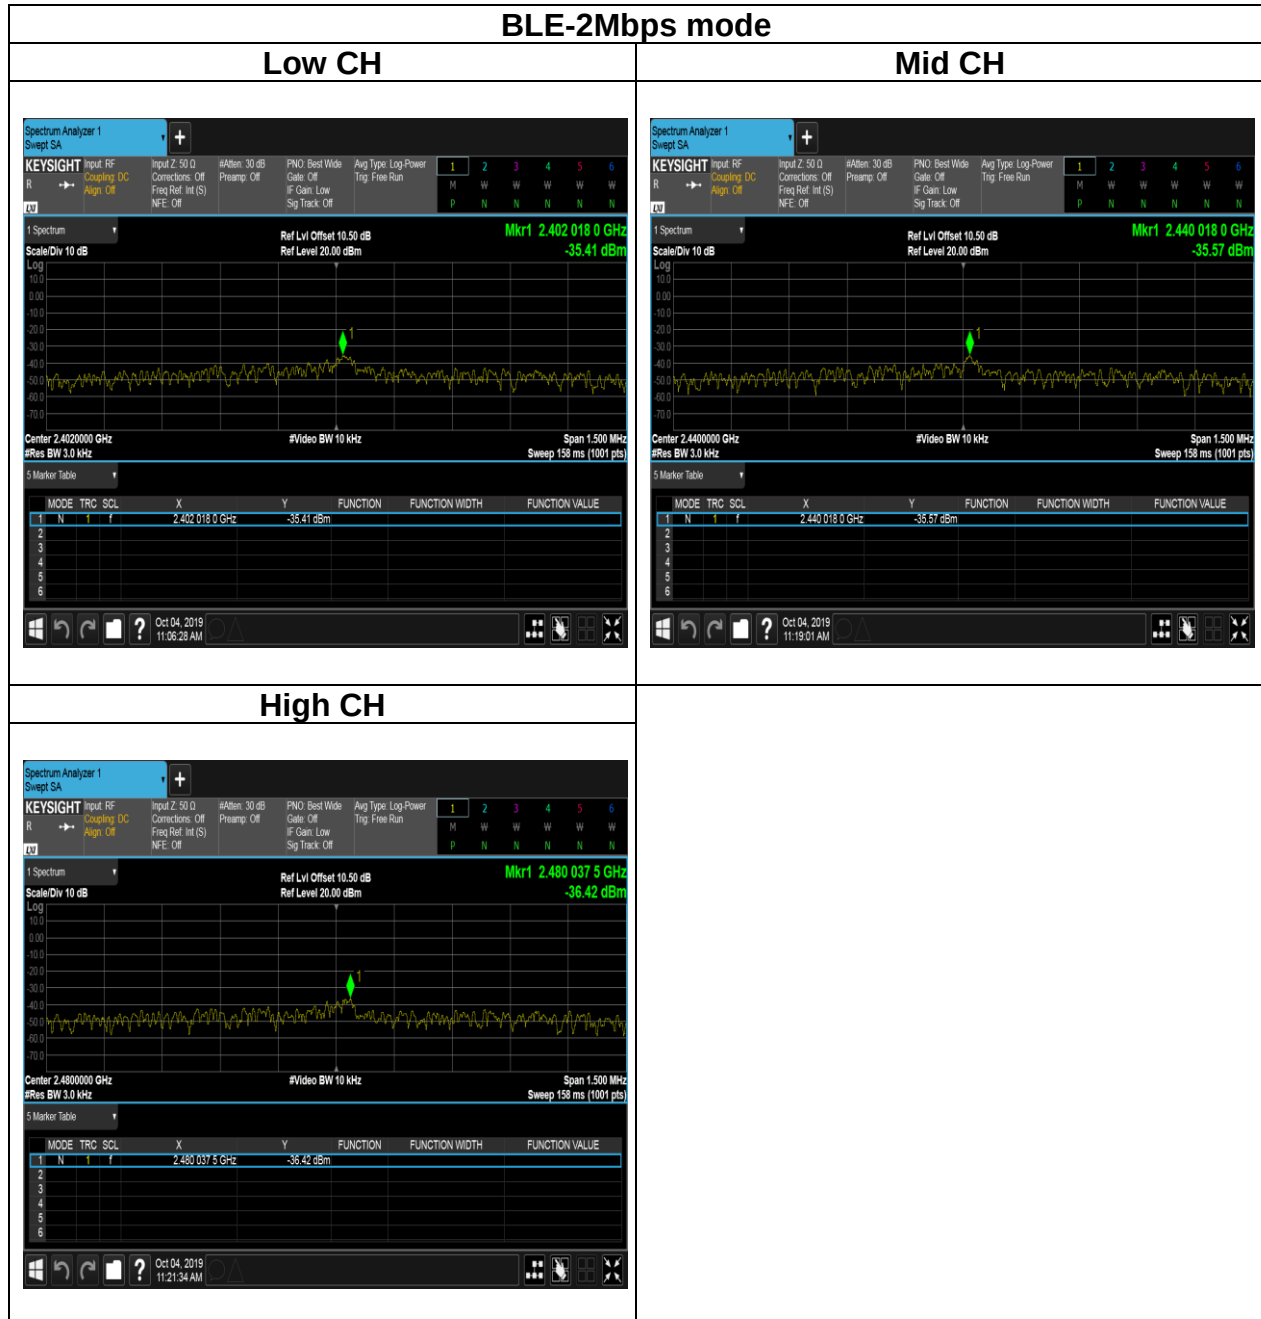

4.5 CONDUCTED BAND EDGE AND SPURIOUS EMISSION

4.5.1 Test Limit

According to §15.247(d),

In any 100 kHz bandwidth outside the authorized frequency band,


Non-restricted bands shall be attenuated at least 20 dB/30 dB relative to the maximum PSD level in 100 kHz by RF conducted or a radiated measurement which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

4.5.2 Test Procedure

Test method Refer as KDB 558074 D01.

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. In any 100 kHz bandwidth outside the authorized frequency band, shall be attenuated at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when conducted power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.


4.5.3 Test Setup




Report No.: T190401W01-RP2

4.5.4 Test Result

Test Data

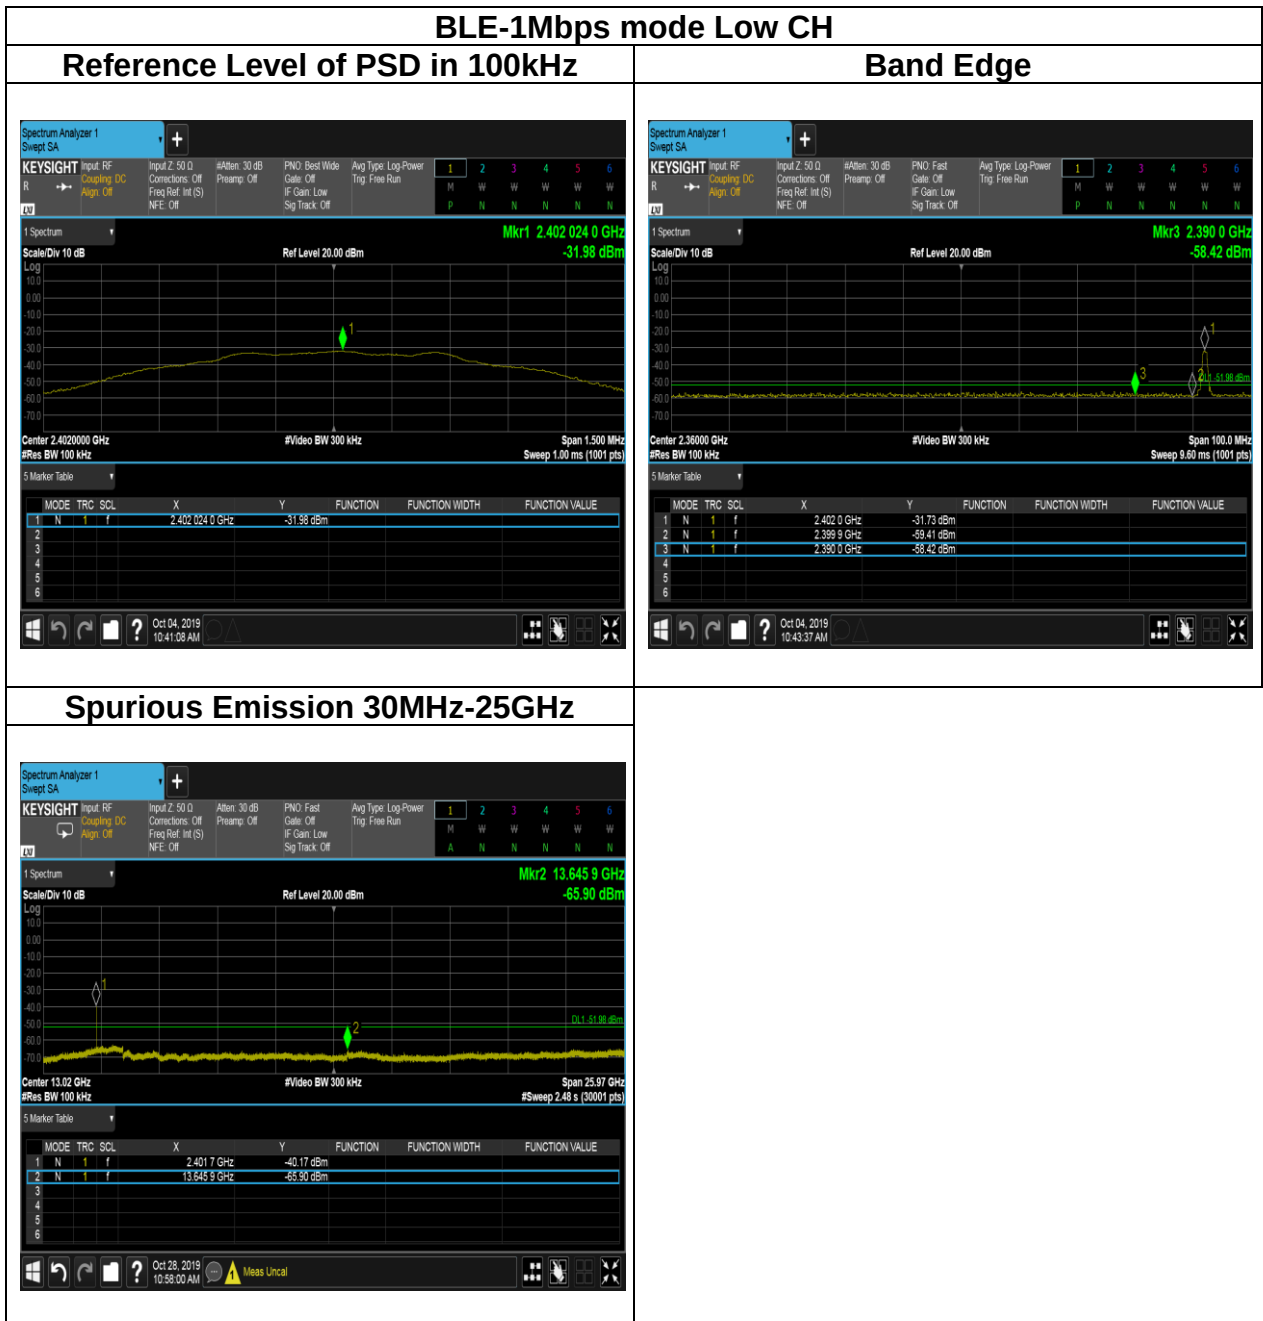

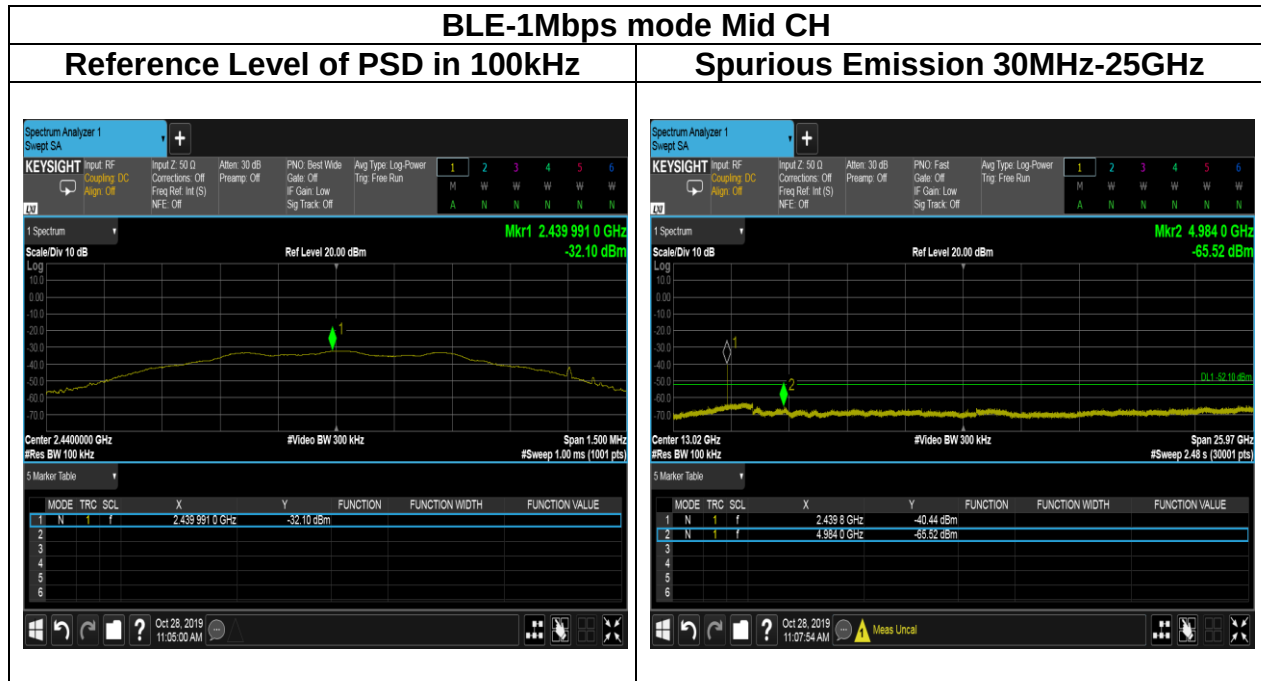






Report No.: T190401W01-RP2

Page 32 / 60
Rev. 01




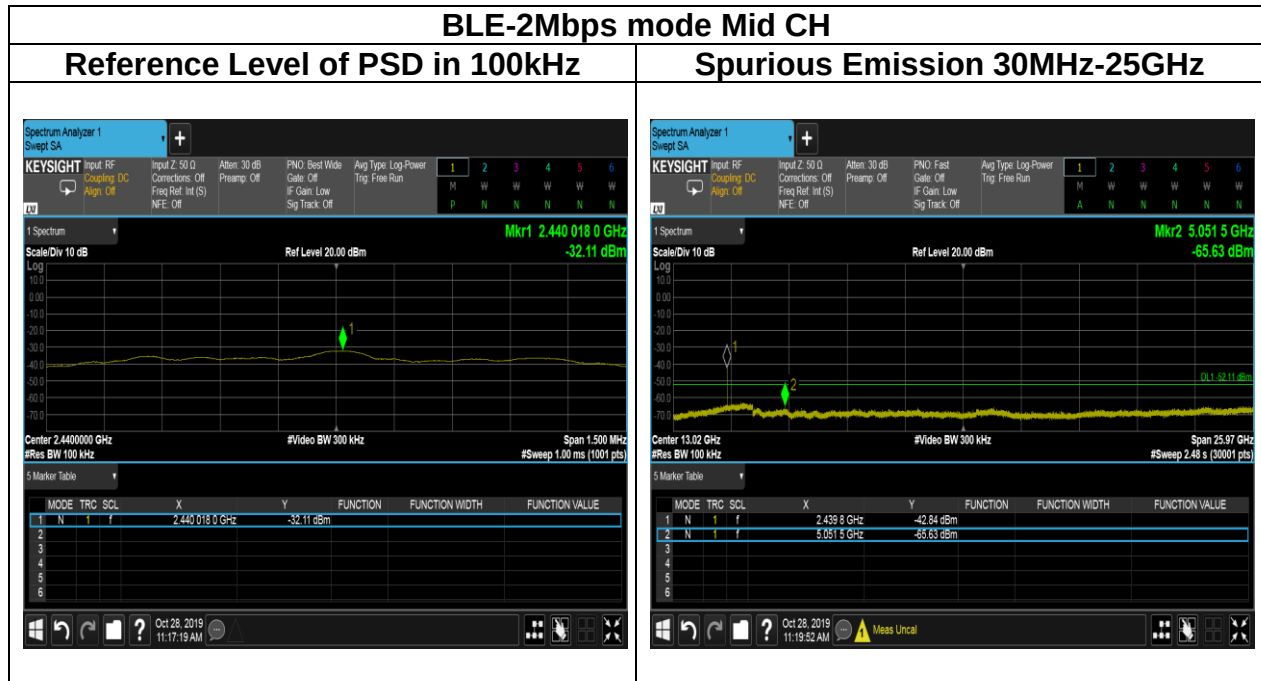



Report No.: T190401W01-RP2

Page 34 / 60
Rev. 01

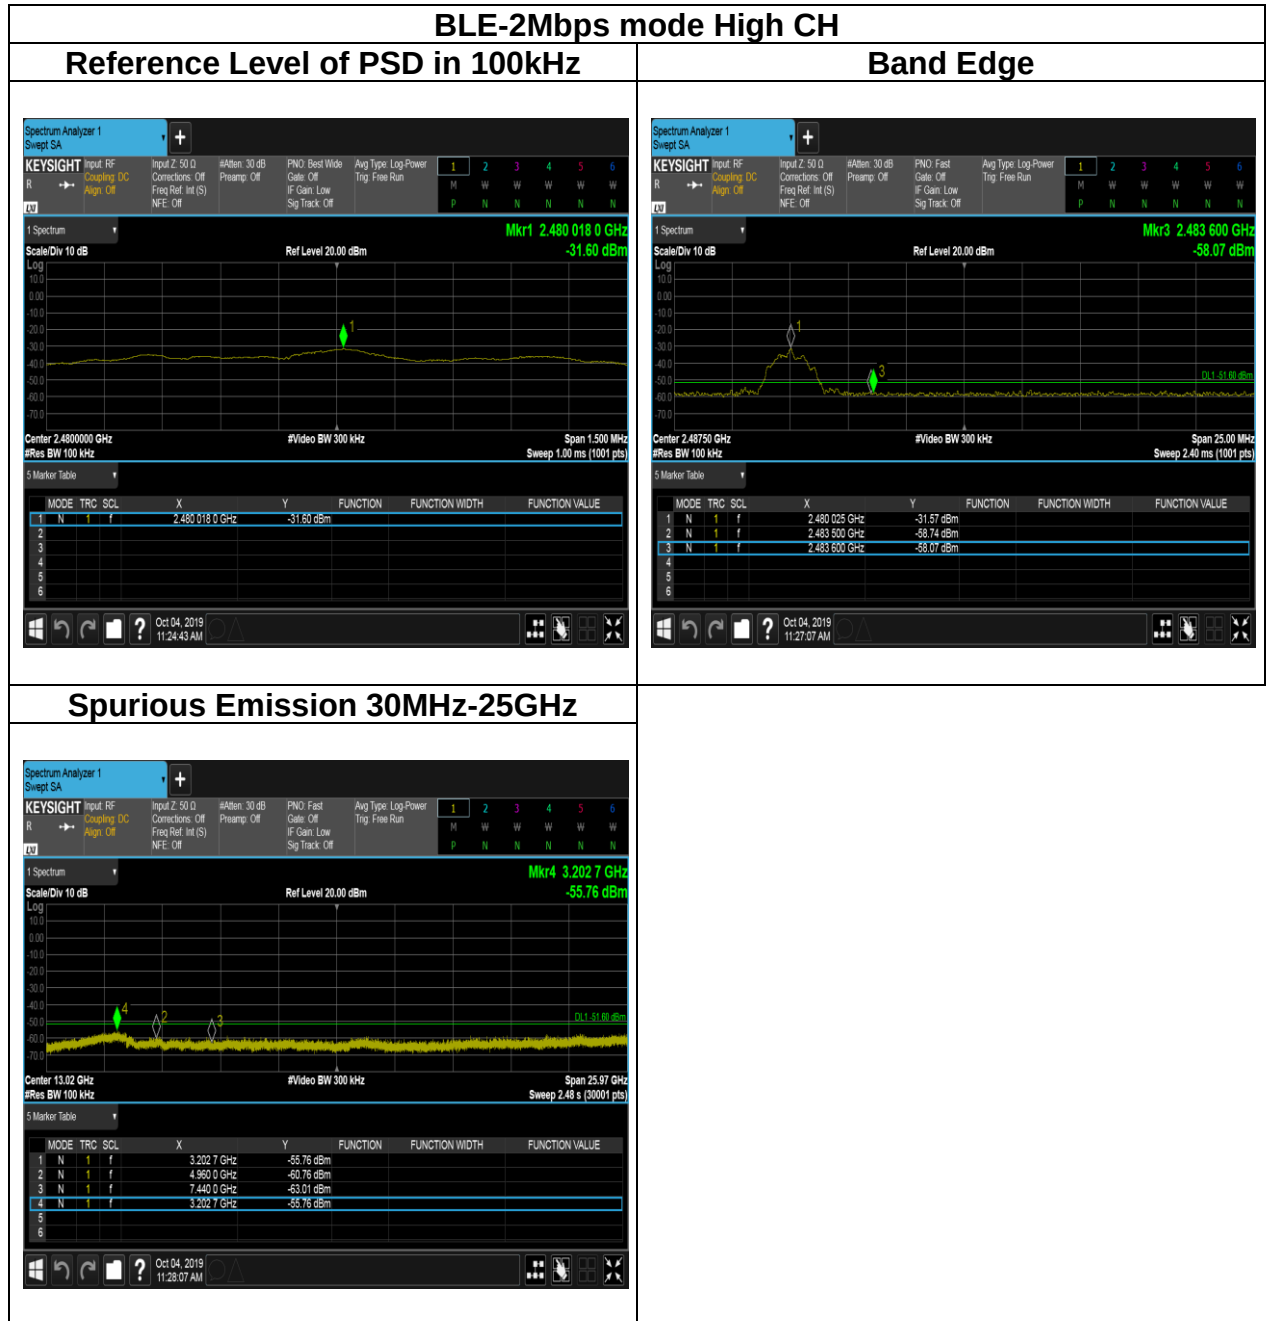

4.6 RADIATION BANDEDGE AND SPURIOUS EMISSION

4.6.1 Test Limit

FCC according to §15.247(d), §15.209 and §15.205,

In any 100 kHz bandwidth outside the authorized frequency band, all harmonic and spurious must be least 20 dB below the highest emission level with the authorized frequency band. Radiation emission which fall in the restricted bands must also follow the FCC section 15.209 as below limit in table.

Below 30 MHz

Frequency	Field Strength (microvolts/m)	Magnetic H-Field (microamperes/m)	Measurement Distance (metres)
9-490 kHz	2,400/F (F in kHz)	2,400/F (F in kHz)	300
490-1,705 kHz	24,000/F (F in kHz)	24,000/F (F in kHz)	30
1.705-30 MHz	30	N/A	30

Above 30 MHz

Frequency (MHz)	Field Strength microvolts/m at 3 metres (watts, e.i.r.p.)	
	Transmitters	Receivers
30-88	100 (3 nW)	100 (3 nW)
88-216	150 (6.8 nW)	150 (6.8 nW)
216-960	200 (12 nW)	200 (12 nW)
Above 960	500 (75 nW)	500 (75 nW)

Remark:

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

4.6.2 Test Procedure

Test method Refer as KDB 558074 D01.

1. The EUT is placed on a turntable, Above 1 GHz is 1.5m and below 1 GHz is 0.8m above ground plane. The EUT Configured un accordance with ANSI C63.10: 2013, and the EUT set in a continuous mode.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. And EUT is set 3m away from the receiving antenna, which is scanned from 1m to 4m above the ground plane to find out the highest emissions. Measurement are made polarized in both the vertical and the horizontal positions with antenna.
3. Span shall wide enough to full capture the emission measured. The SA from 9KHz to 26.5GHz set to the low, Mid and High channels with the EUT transmit.

Remark:


1. Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.
2. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).

4. The SA setting following :


- (1) Below 1G : RBW = 100kHz, VBW $\geq$ 3 RBW, Sweep = Auto, Detector = Peak, Trace = Max hold.
- (2) Above 1G :
 - (2.1) For Peak measurement : RBW = 1MHz, VBW $\geq$ 3 RBW, Sweep = Auto, Detector = Peak, Trace = Max hold.
 - (2.2) For Average measurement : RBW = 1MHz, VBW
 - *If Duty Cycle $\geq$ 98%, VBW=10Hz.
 - *If Duty Cycle < 98%, VBW=1/T.

4.6.3 Test Setup


9kHz ~ 30MHz

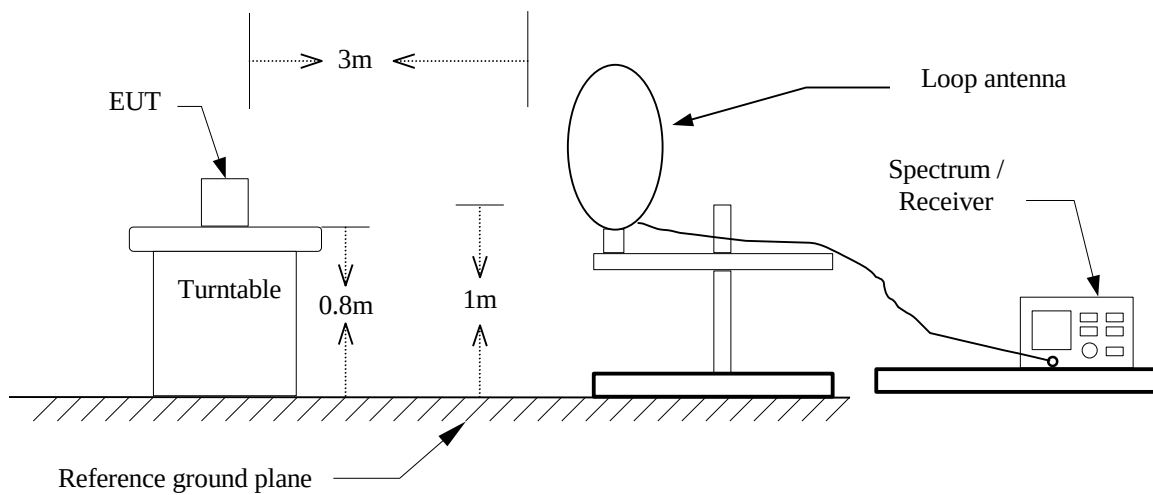

30MHz ~ 1GHz

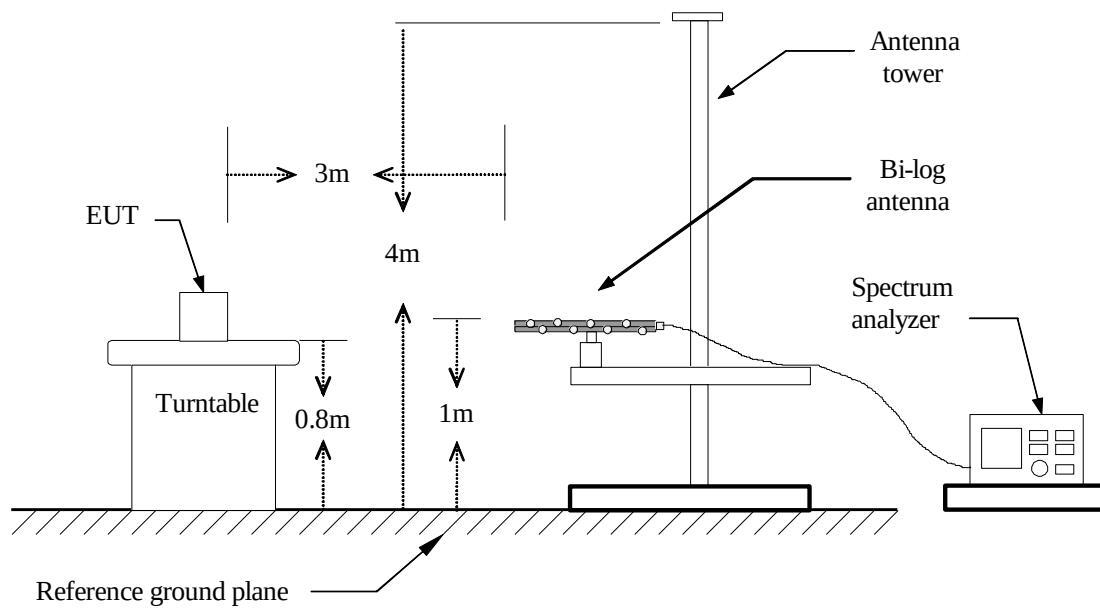


Above 1 GHz

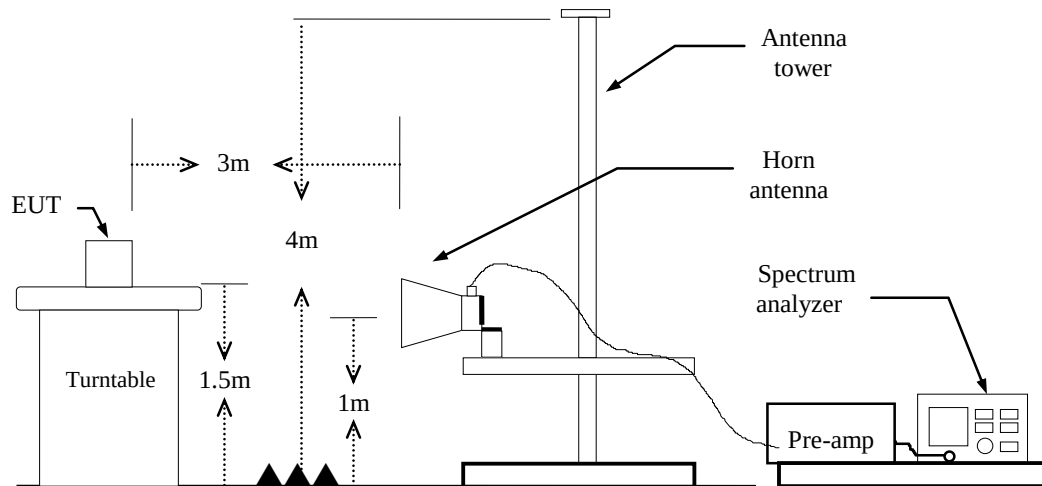

4.6.4 Test Result


Band Edge Test Data

Test Mode:	BLE-1Mbps Low CH	Temp/Hum	27.5(°C)/ 53%RH
Test Item	Band Edge	Test Date	October 1, 2019
Polarize	Vertical	Test Engineer	Dally Hong
Detector	Peak / Average		

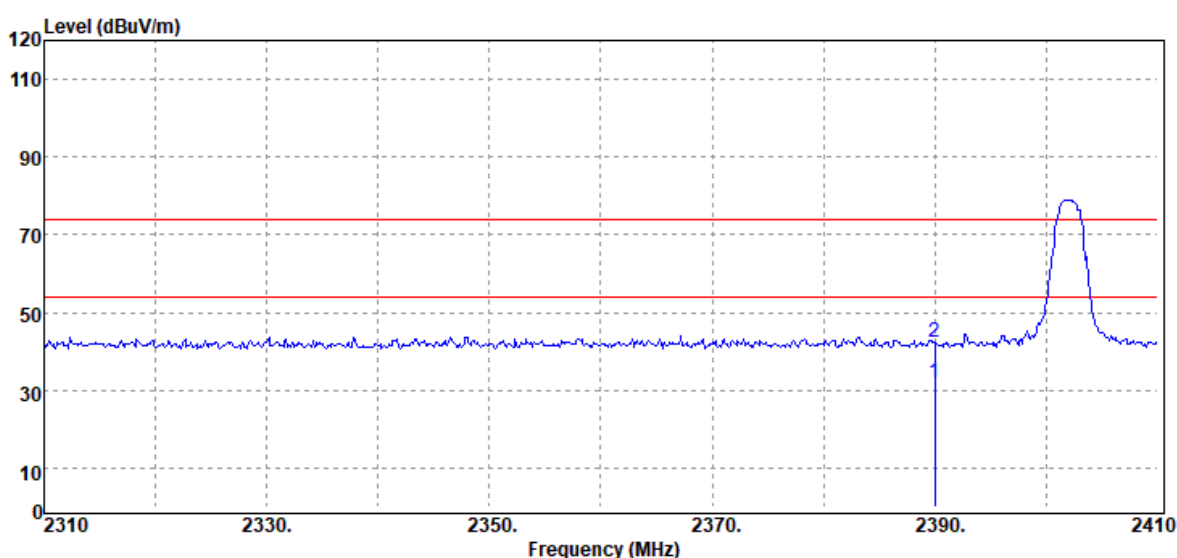


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
2390.00	Average	30.35	1.75	32.10	54.00	-21.90
2390.00	Peak	40.44	1.75	42.19	74.00	-31.81

Test Mode:	BLE-1Mbps Low CH	Temp/Hum	27.5(°C)/ 53%RH
Test Item	Band Edge	Test Date	October 1, 2019
Polarize	Horizontal	Test Engineer	Dally Hong
Detector	Peak / Average		

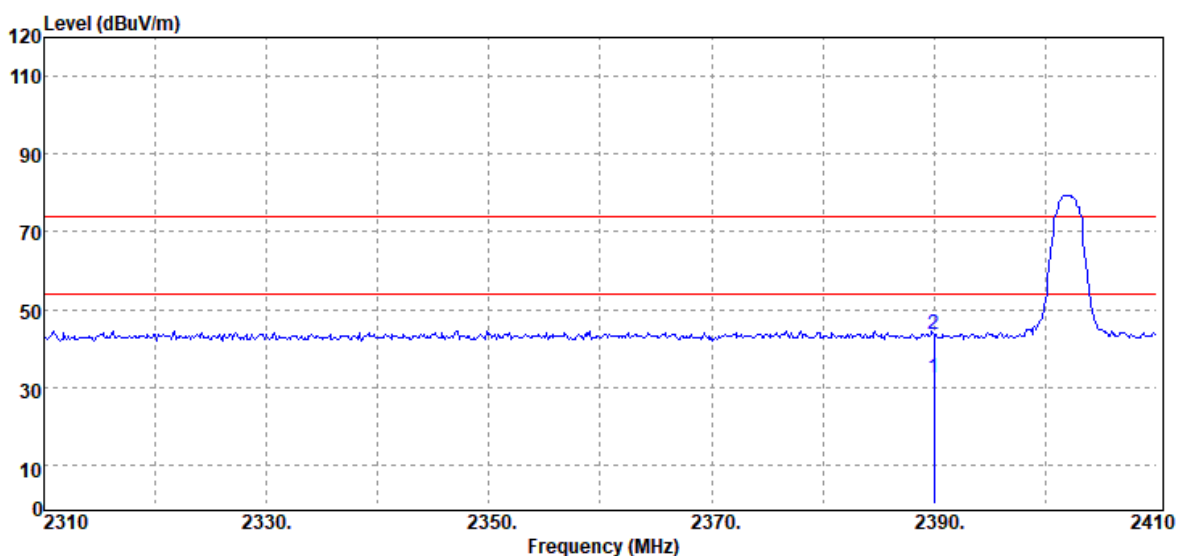


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
2390.00	Average	30.64	1.75	32.39	54.00	-21.61
2390.00	Peak	41.72	1.75	43.47	74.00	-30.53

Test Mode:	BLE-1Mbps High CH	Temp/Hum	27.5(°C)/ 53%RH
Test Item	Band Edge	Test Date	October 1, 2019
Polarize	Vertical	Test Engineer	Dally Hong
Detector	Peak / Average		

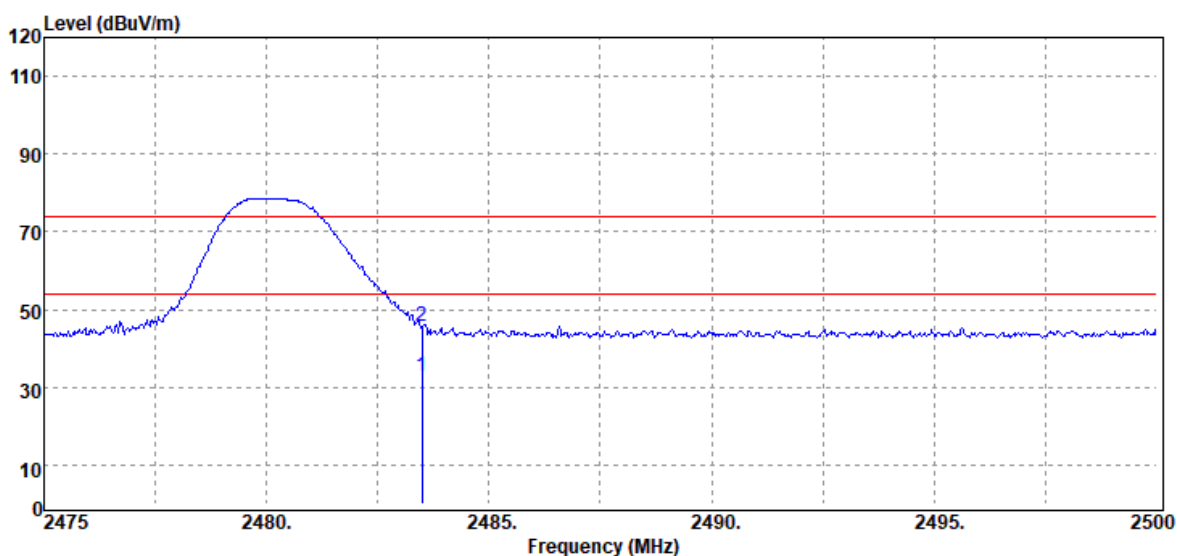


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
2483.50	Average	30.67	2.29	32.96	54.00	-21.04
2483.50	Peak	43.49	2.29	45.78	74.00	-28.22

Test Mode:	BLE-1Mbps High CH	Temp/Hum	27.5(°C)/ 53%RH
Test Item	Band Edge	Test Date	October 1, 2019
Polarize	Horizontal	Test Engineer	Dally Hong
Detector	Peak / Average		

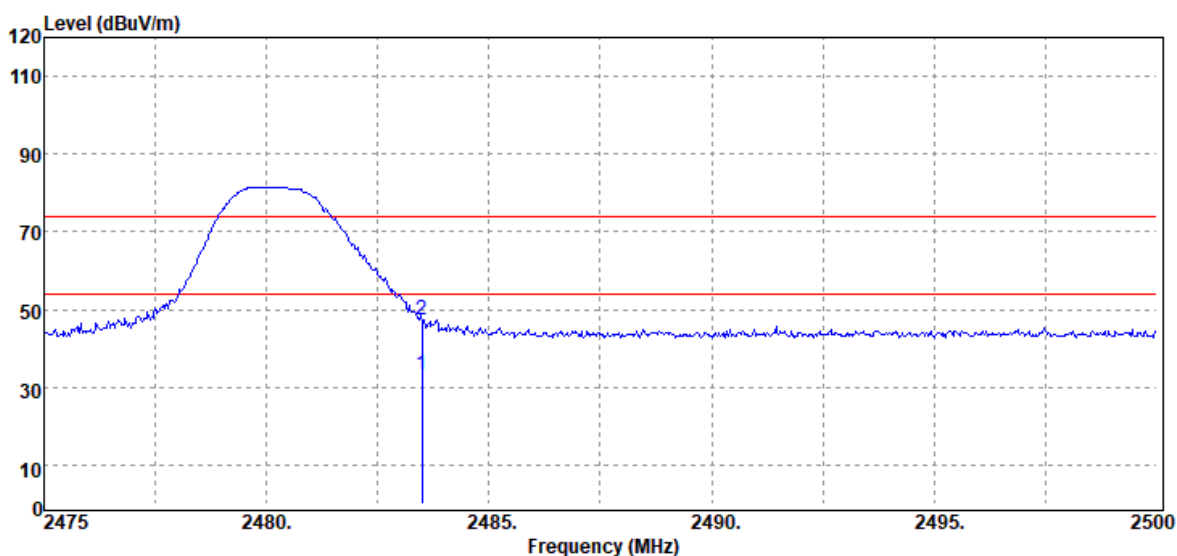


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
2483.50	Average	30.73	2.29	33.02	54.00	-20.98
2483.50	Peak	44.98	2.29	47.27	74.00	-26.73

Test Mode:	BLE-2Mbps Low CH	Temp/Hum	27.5(°C)/ 53%RH
Test Item	Band Edge	Test Date	October 1, 2019
Polarize	Vertical	Test Engineer	Dally Hong
Detector	Peak / Average		

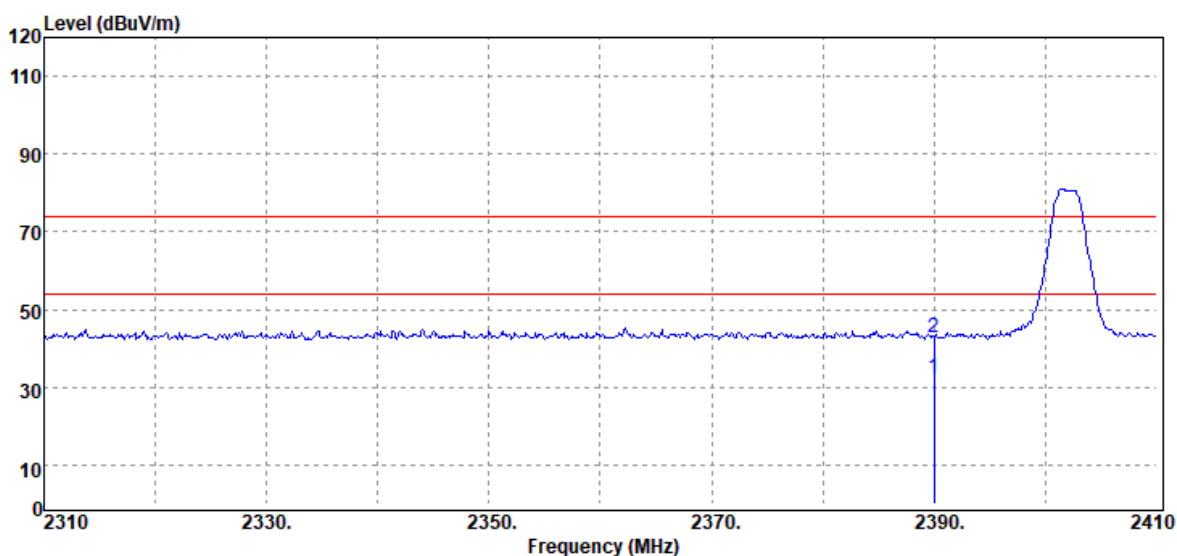


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
2390.00	Average	30.44	1.75	32.19	54.00	-21.81
2390.00	Peak	41.15	1.75	42.90	74.00	-31.10

Test Mode:	BLE-2Mbps Low CH	Temp/Hum	27.5(°C)/ 53%RH
Test Item	Band Edge	Test Date	October 1, 2019
Polarize	Horizontal	Test Engineer	Dally Hong
Detector	Peak / Average		

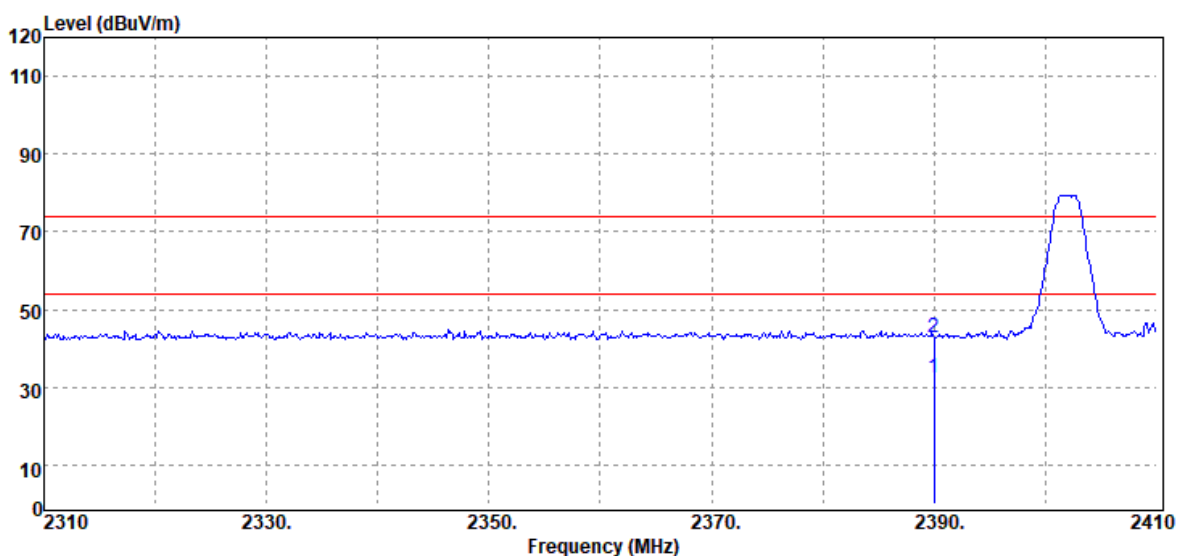


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
2390.00	Average	30.48	1.75	32.23	54.00	-21.77
2390.00	Peak	41.11	1.75	42.86	74.00	-31.14

Test Mode:	BLE-2Mbps High CH	Temp/Hum	27.5(°C)/ 53%RH
Test Item	Band Edge	Test Date	October 1, 2019
Polarize	Vertical	Test Engineer	Dally Hong
Detector	Peak / Average		

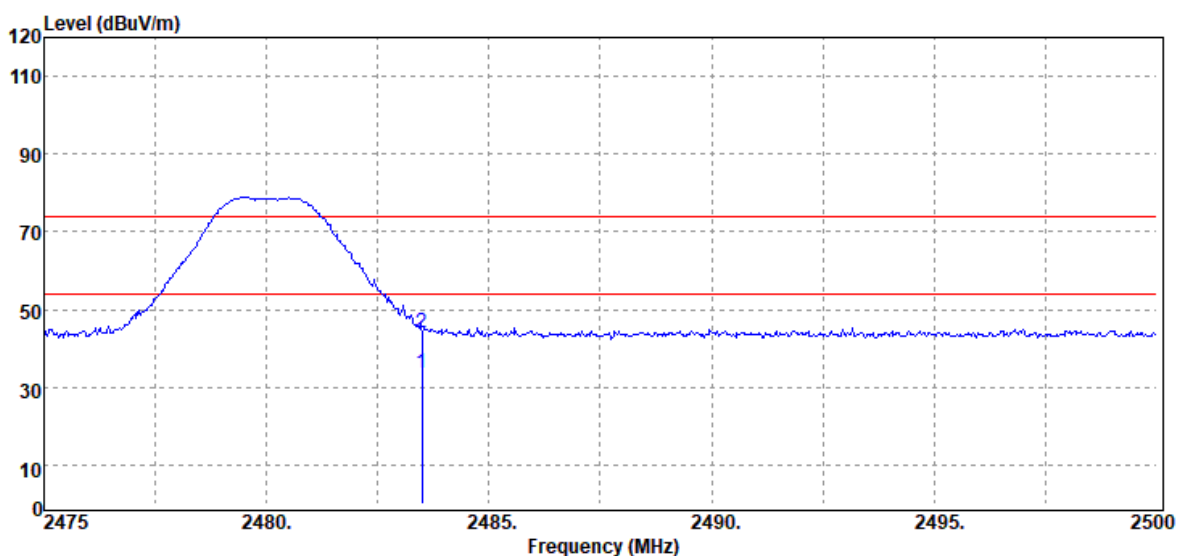

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
2483.50	Average	31.53	2.29	33.82	54.00	-20.18
2483.50	Peak	41.89	2.29	44.18	74.00	-29.82

Test Mode:	BLE-2Mbps High CH	Temp/Hum	27.5(°C)/ 53%RH
Test Item	Band Edge	Test Date	October 1, 2019
Polarize	Horizontal	Test Engineer	Dally Hong
Detector	Peak / Average		

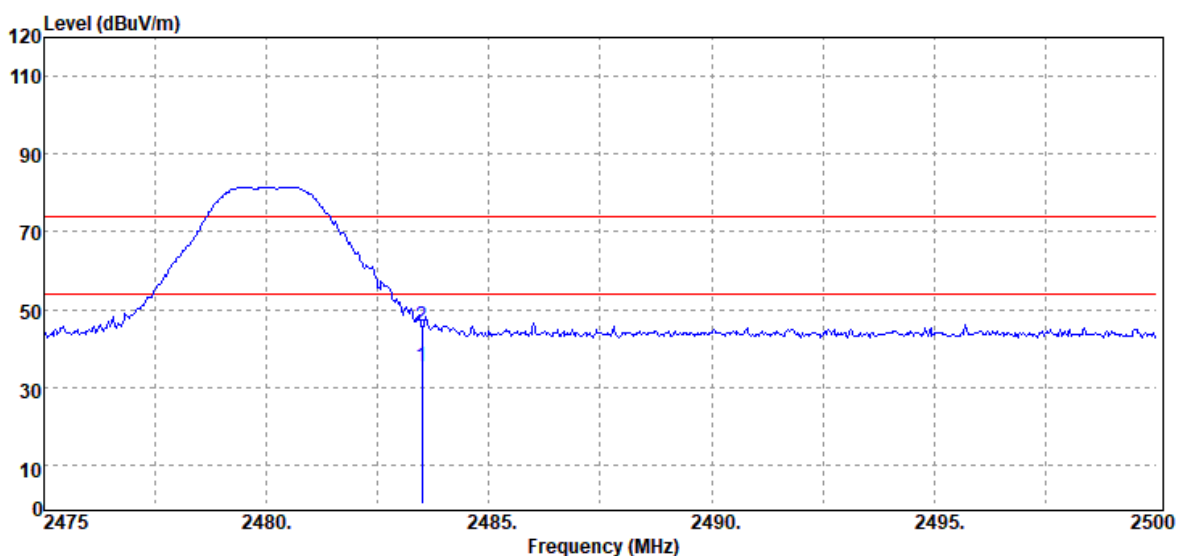


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
2483.50	Average	32.87	2.29	35.16	54.00	-18.84
2483.50	Peak	43.19	2.29	45.48	74.00	-28.52

Report No.: T190401W01-RP2

Below 1G Test Data


Test Mode:	BLE-1Mbps Mode	Temp/Hum	27.5(°C)/ 53%RH
Test Item	30MHz-1GHz	Test Date	October 1, 2019
Polarize	Vertical	Test Engineer	Dally Hong
Detector	Peak		

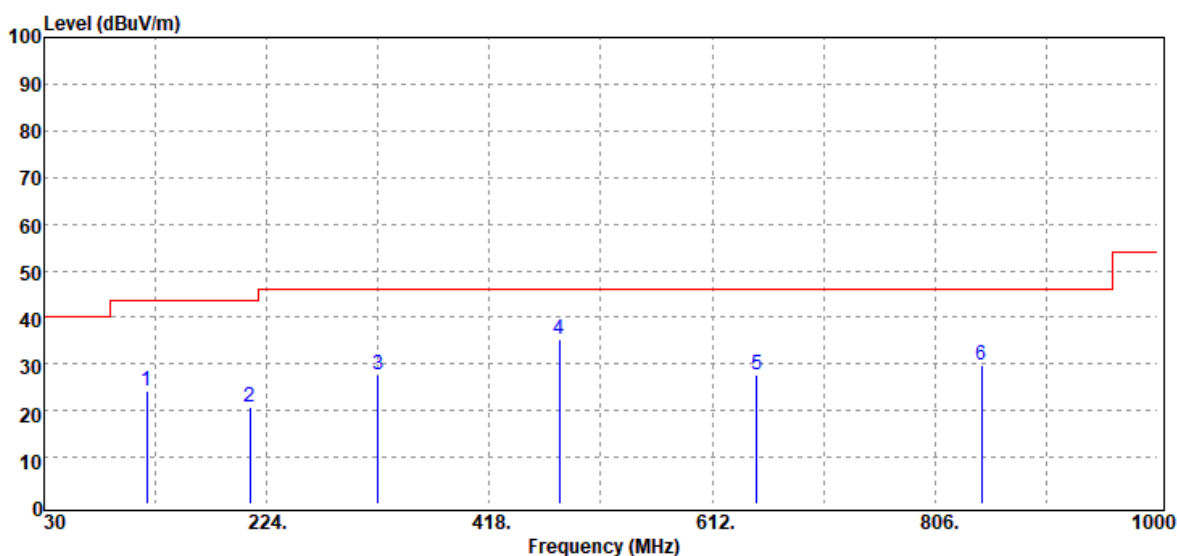

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
119.24	Peak	33.04	-8.94	24.10	43.50	-19.40
209.45	Peak	32.25	-11.57	20.68	43.50	-22.82
321.00	Peak	35.08	-7.47	27.61	46.00	-18.39
479.11	Peak	38.27	-2.98	35.29	46.00	-10.71
650.80	Peak	27.93	-0.23	27.70	46.00	-18.30
846.74	Peak	26.70	3.10	29.80	46.00	-16.20

Note: No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).

Test Mode:	BLE-1Mbps Mode	Temp/Hum	27.5(°C)/ 53%RH
Test Item	30MHz-1GHz	Test Date	October 1, 2019
Polarize	Horizontal	Test Engineer	Dally Hong
Detector	Peak		

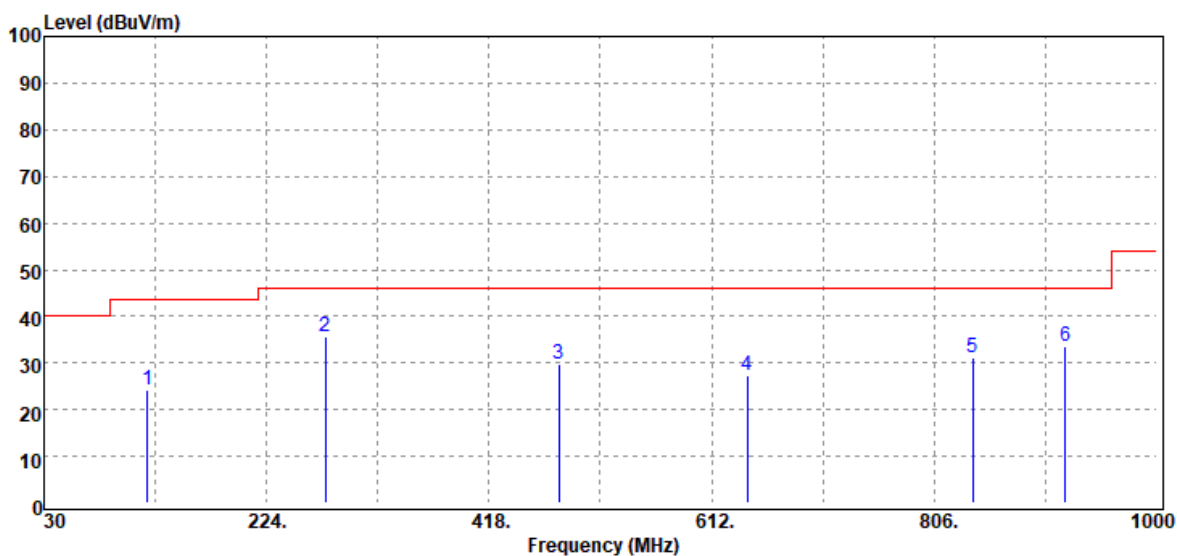


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
120.21	Peak	33.12	-8.88	24.24	43.50	-19.26
275.41	Peak	43.93	-8.42	35.51	46.00	-10.49
479.11	Peak	32.79	-2.98	29.81	46.00	-16.19
643.04	Peak	27.54	-0.30	27.24	46.00	-18.76
839.95	Peak	27.49	3.58	31.07	46.00	-14.93
920.46	Peak	29.80	3.93	33.73	46.00	-12.27

Note: No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).

Above 1G Test Data

Test Mode:	BLE-1Mbps Low CH	Temp/Hum	27.5(°C)/ 53%RH
Test Item	Harmonic	Test Date	October 1, 2019
Polarize	Vertical	Test Engineer	Dally Hong
Detector	Peak / Average		

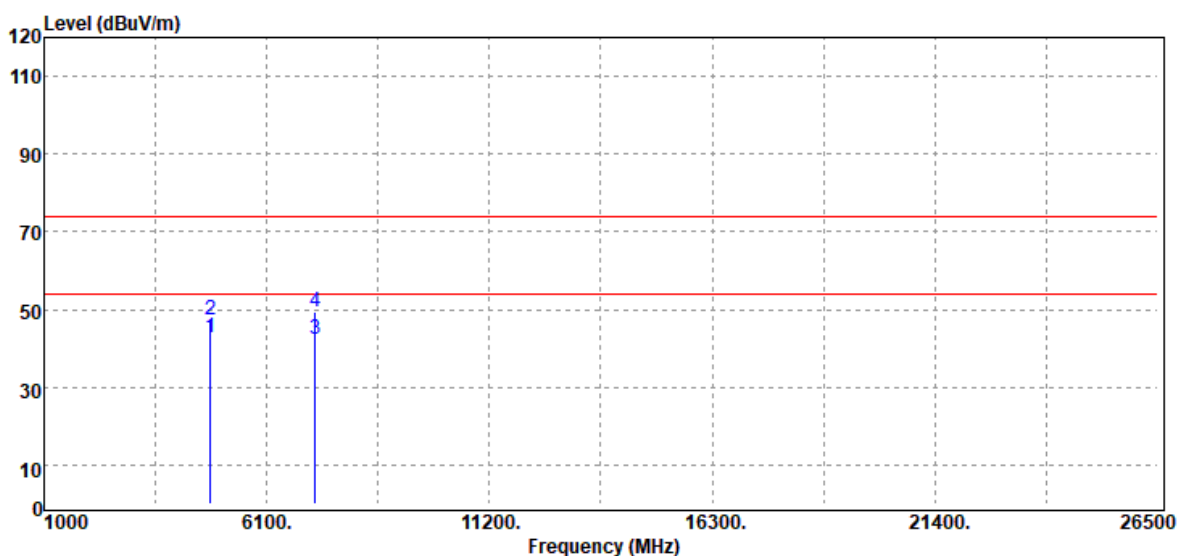


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
4804.00	Average	35.92	6.83	42.75	54.00	-11.25
4804.00	Peak	40.53	6.83	47.36	74.00	-26.64
7206.00	Average	31.55	10.73	42.28	54.00	-11.72
7206.00	Peak	38.83	10.73	49.56	74.00	-24.44
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode:	BLE-1Mbps Low CH	Temp/Hum	27.5(°C)/ 53%RH
Test Item	Harmonic	Test Date	October 1, 2019
Polarize	Horizontal	Test Engineer	Dally Hong
Detector	Peak / Average		

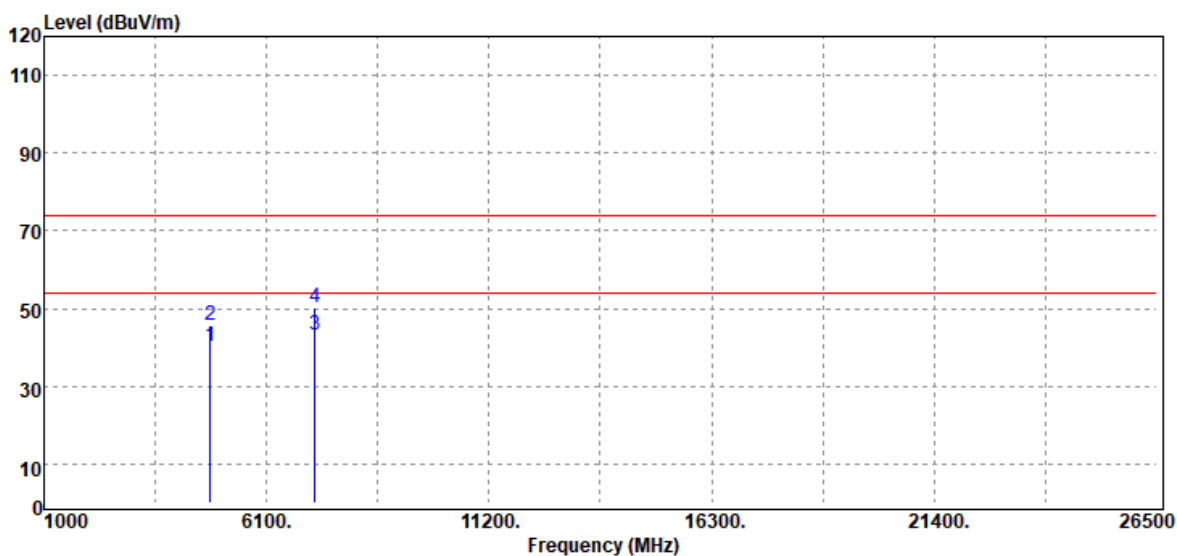


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
4804.00	Average	33.55	6.83	40.38	54.00	-13.62
4804.00	Peak	38.98	6.83	45.81	74.00	-28.19
7206.00	Average	32.48	10.73	43.21	54.00	-10.79
7206.00	Peak	39.44	10.73	50.17	74.00	-23.83
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode:	BLE-1Mbps Mid CH	Temp/Hum	27.5(°C)/ 53%RH
Test Item	Harmonic	Test Date	October 1, 2019
Polarize	Vertical	Test Engineer	Dally Hong
Detector	Peak / Average		

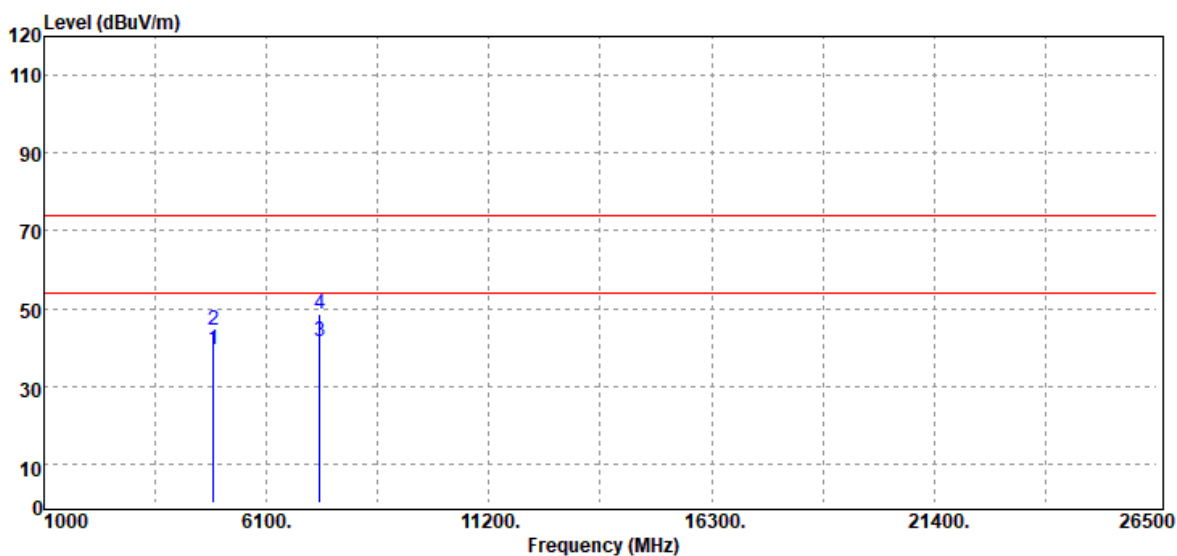


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
4880.00	Average	32.43	6.88	39.31	54.00	-14.69
4880.00	Peak	37.44	6.88	44.32	74.00	-29.68
7320.00	Average	30.65	10.70	41.35	54.00	-12.65
7320.00	Peak	37.85	10.70	48.55	74.00	-25.45
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode:	BLE-1Mbps Mid CH	Temp/Hum	27.5(°C)/ 53%RH
Test Item	Harmonic	Test Date	October 1, 2019
Polarize	Horizontal	Test Engineer	Dally Hong
Detector	Peak / Average		

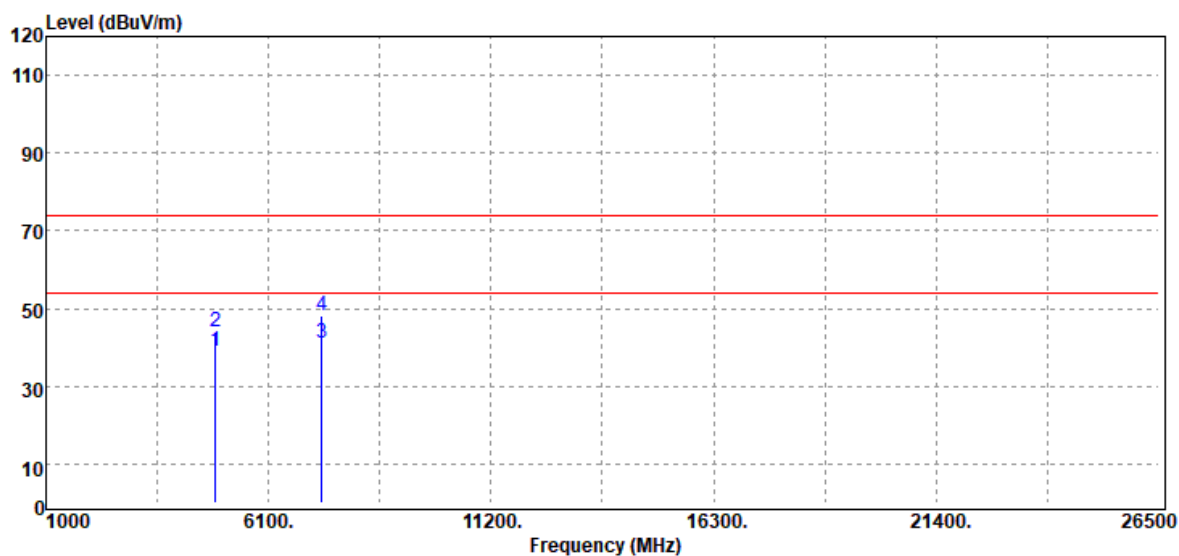


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
4880.00	Average	32.29	6.88	39.17	54.00	-14.83
4880.00	Peak	37.09	6.88	43.97	74.00	-30.03
7320.00	Average	30.28	10.70	40.98	54.00	-13.02
7320.00	Peak	37.48	10.70	48.18	74.00	-25.82
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode:	BLE-1Mbps High CH	Temp/Hum	27.5(°C)/ 53%RH
Test Item	Harmonic	Test Date	October 1, 2019
Polarize	Vertical	Test Engineer	Dally Hong
Detector	Peak / Average		

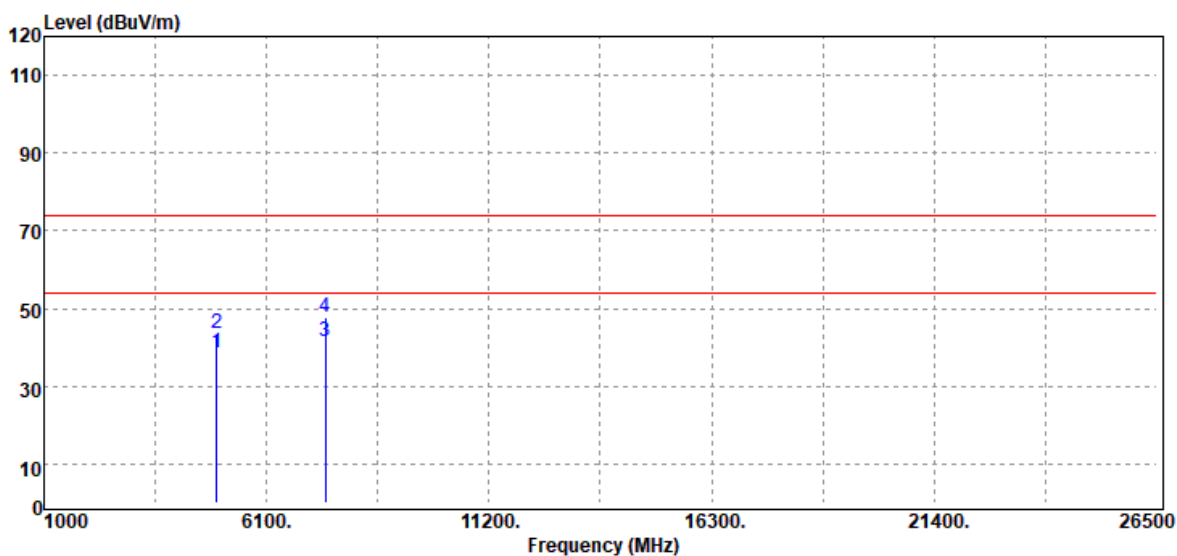


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
4960.00	Average	31.90	6.90	38.80	54.00	-15.20
4960.00	Peak	36.84	6.90	43.74	74.00	-30.26
7440.00	Average	30.08	11.30	41.38	54.00	-12.62
7440.00	Peak	36.28	11.30	47.58	74.00	-26.42
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode:	BLE-1Mbps High CH	Temp/Hum	27.5(°C)/ 53%RH
Test Item	Harmonic	Test Date	October 1, 2019
Polarize	Horizontal	Test Engineer	Dally Hong
Detector	Peak / Average		

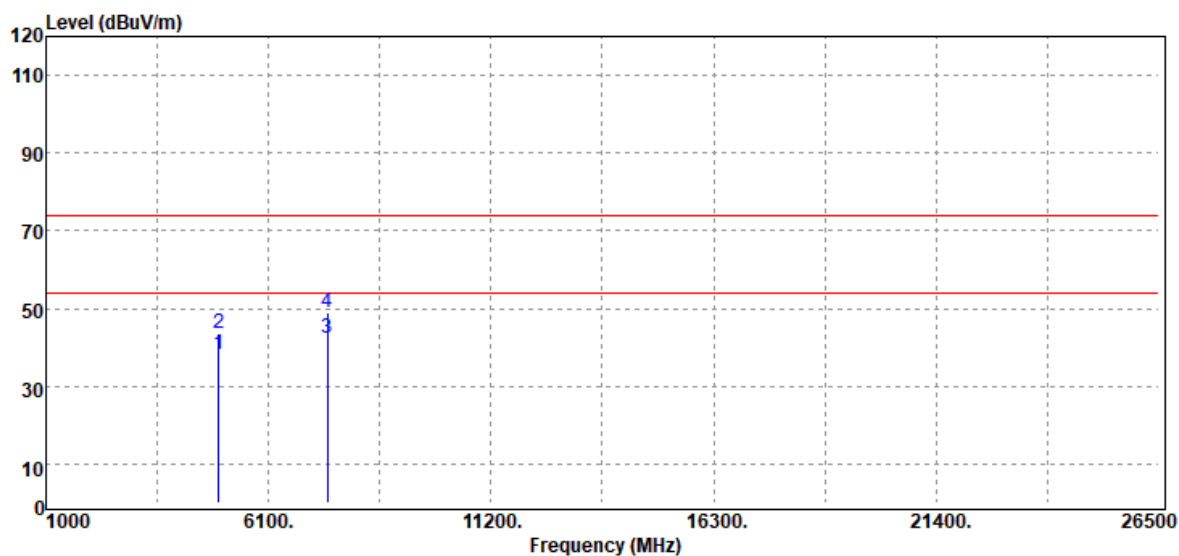


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
4960.00	Average	31.37	6.90	38.27	54.00	-15.73
4960.00	Peak	36.67	6.90	43.57	74.00	-30.43
7440.00	Average	30.98	11.30	42.28	54.00	-11.72
7440.00	Peak	37.78	11.30	49.08	74.00	-24.92
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode:	BLE-2Mbps Low CH	Temp/Hum	27.5(°C)/ 53%RH
Test Item	Harmonic	Test Date	October 1, 2019
Polarize	Vertical	Test Engineer	Dally Hong
Detector	Peak / Average		

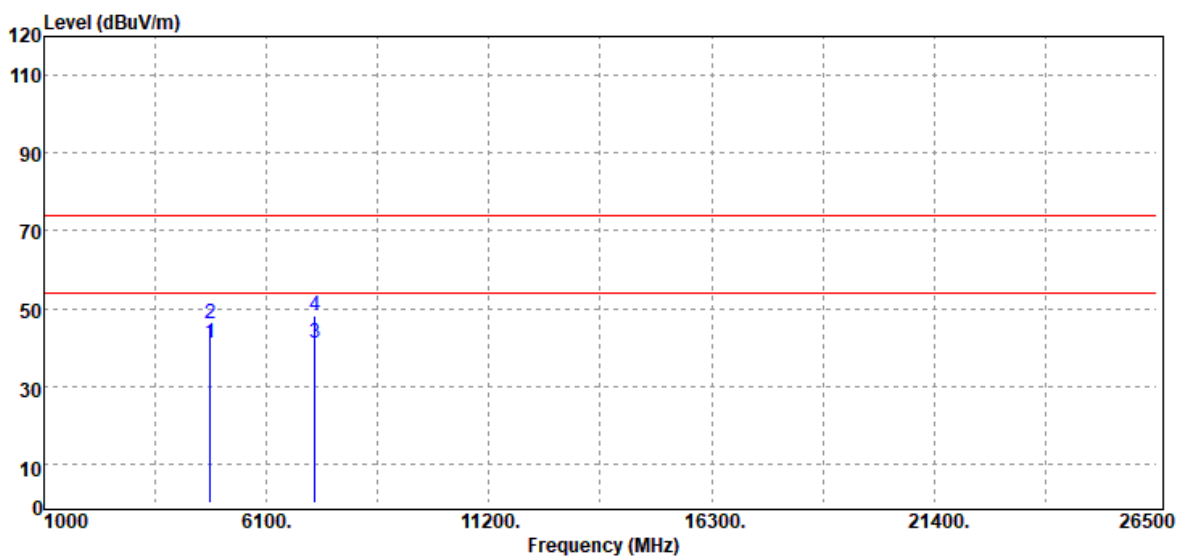


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
4804.00	Average	34.35	6.83	41.18	54.00	-12.82
4804.00	Peak	39.38	6.83	46.21	74.00	-27.79
7206.00	Average	30.39	10.73	41.12	54.00	-12.88
7206.00	Peak	37.43	10.73	48.16	74.00	-25.84
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode:	BLE-2Mbps Low CH	Temp/Hum	27.5(°C)/ 53%RH
Test Item	Harmonic	Test Date	October 1, 2019
Polarize	Horizontal	Test Engineer	Dally Hong
Detector	Peak / Average		

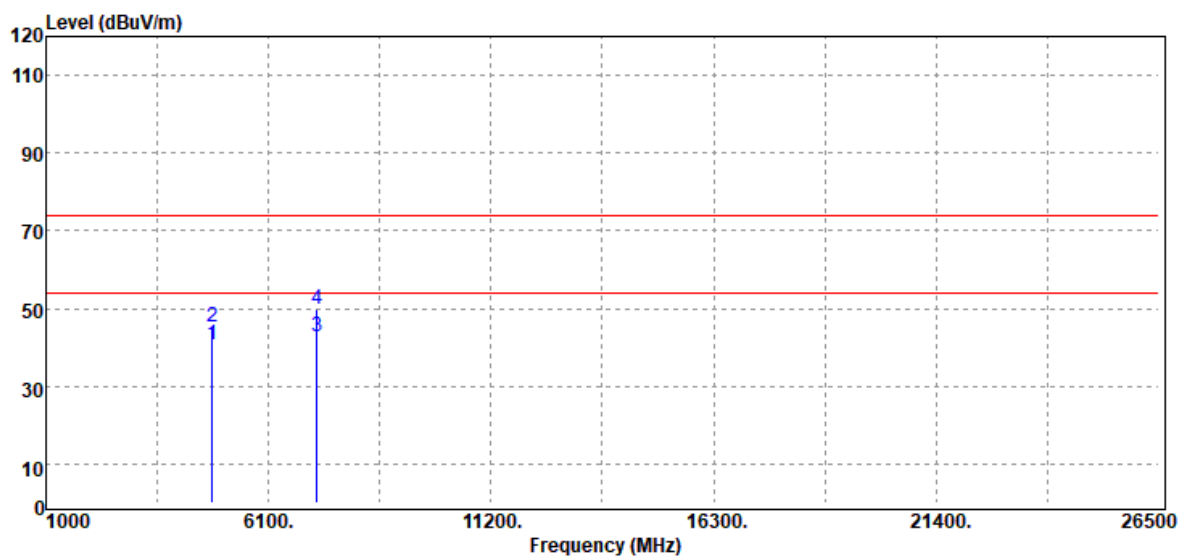


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
4804.00	Average	33.80	6.83	40.63	54.00	-13.37
4804.00	Peak	38.56	6.83	45.39	74.00	-28.61
7206.00	Average	32.18	10.73	42.91	54.00	-11.09
7206.00	Peak	39.28	10.73	50.01	74.00	-23.99
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode:	BLE-2Mbps Mid CH	Temp/Hum	27.5(°C)/ 53%RH
Test Item	Harmonic	Test Date	October 1, 2019
Polarize	Vertical	Test Engineer	Dally Hong
Detector	Peak / Average		

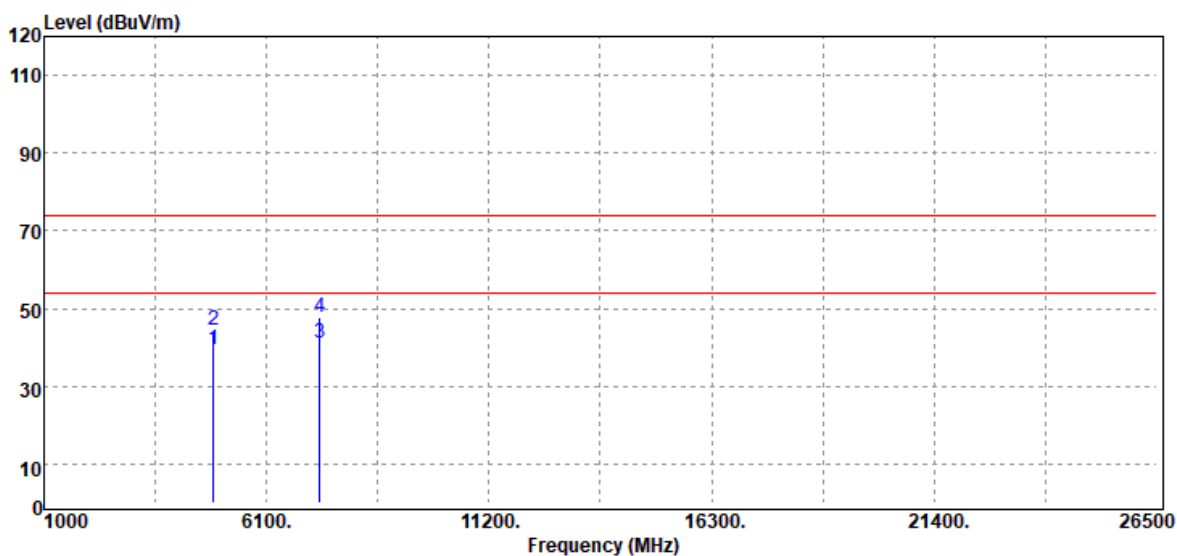


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
4880.00	Average	32.74	6.88	39.62	54.00	-14.38
4880.00	Peak	37.75	6.88	44.63	74.00	-29.37
7320.00	Average	30.21	10.70	40.91	54.00	-13.09
7320.00	Peak	37.12	10.70	47.82	74.00	-26.18
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode:	BLE-2Mbps Mid CH	Temp/Hum	27.5(°C)/ 53%RH
Test Item	Harmonic	Test Date	October 1, 2019
Polarize	Horizontal	Test Engineer	Dally Hong
Detector	Peak / Average		

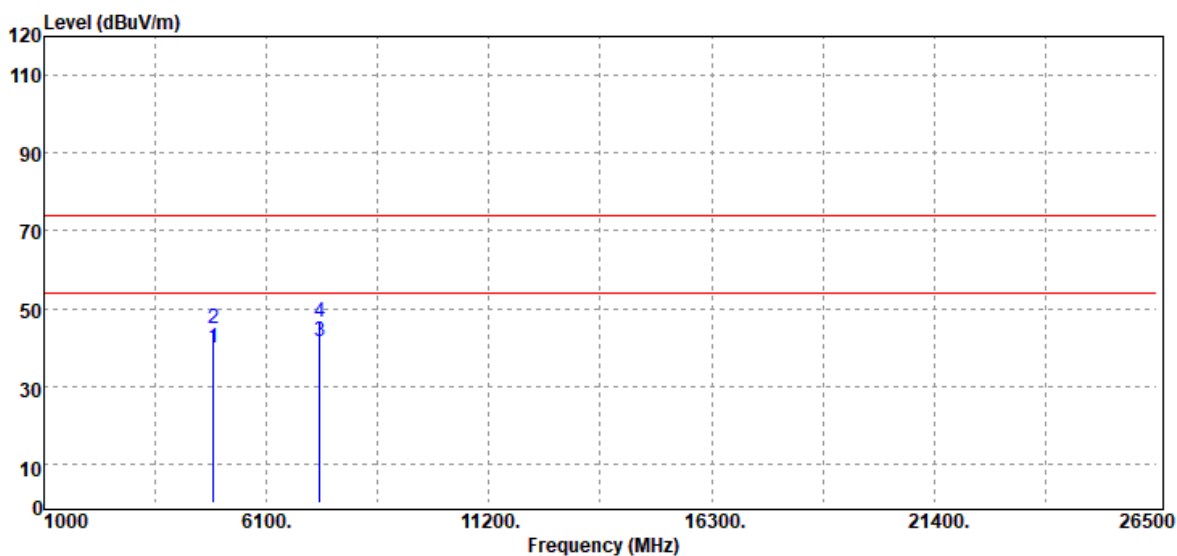


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
4880.00	Average	32.84	6.88	39.72	54.00	-14.28
4880.00	Peak	37.83	6.88	44.71	74.00	-29.29
7320.00	Average	30.86	10.70	41.56	54.00	-12.44
7320.00	Peak	35.72	10.70	46.42	74.00	-27.58
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode:	BLE-2Mbps High CH	Temp/Hum	27.5(°C)/ 53%RH
Test Item	Harmonic	Test Date	October 1, 2019
Polarize	Vertical	Test Engineer	Dally Hong
Detector	Peak / Average		

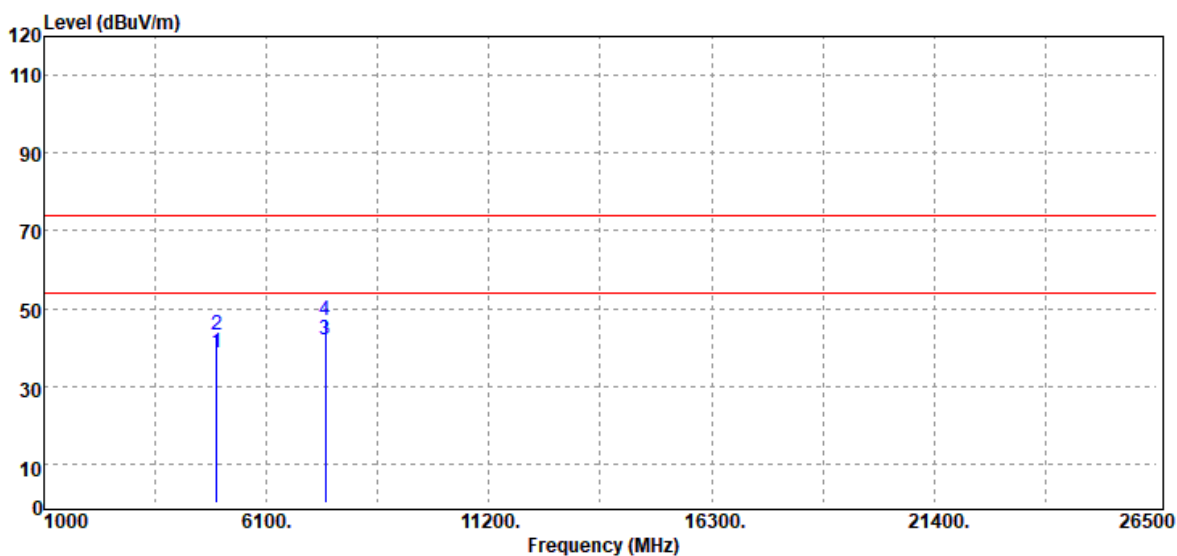


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
4960.00	Average	31.76	6.90	38.66	54.00	-15.34
4960.00	Peak	36.46	6.90	43.36	74.00	-30.64
7440.00	Average	30.67	11.30	41.97	54.00	-12.03
7440.00	Peak	35.60	11.30	46.90	74.00	-27.10
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode:	BLE-2Mbps High CH	Temp/Hum	27.5(°C)/ 53%RH
Test Item	Harmonic	Test Date	October 1, 2019
Polarize	Horizontal	Test Engineer	Dally Hong
Detector	Peak / Average		

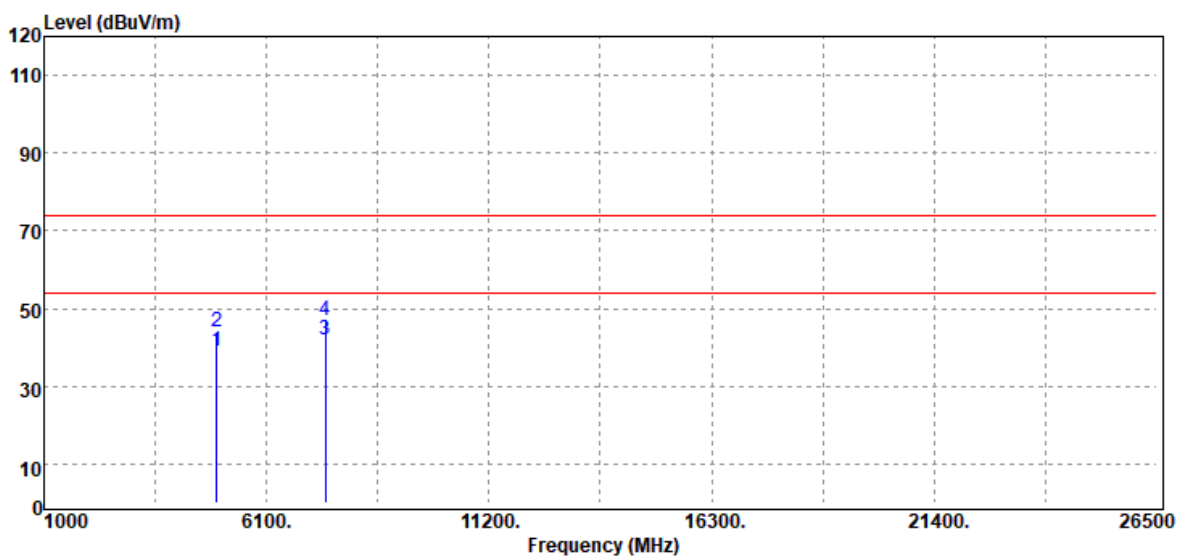

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
4960.00	Average	32.03	6.90	38.93	54.00	-15.07
4960.00	Peak	37.26	6.90	44.16	74.00	-29.84
7440.00	Average	30.64	11.30	41.94	54.00	-12.06
7440.00	Peak	35.64	11.30	46.94	74.00	-27.06
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

--End of Test Report--