



WIFI-Body Horizontal-Up Chain0 CH1	2
WIFI-Body Horizontal-Down Chain0 CH1	4
WIFI-Body Vertical-Front Chain0 CH1	5
WIFI-Body Vertical-Back Chain0 CH1.....	6
WIFI-Body Tip Chain0 CH1	7
WIFI-Body Horizontal-Up Chain1 CH11.....	8
WIFI-Body Horizontal-Down Chain1 CH11	9
WIFI-Body Vertical-Front Chain1 CH11.....	10
WIFI-Body Vertical-Back Chain1 CH11.....	11
WIFI-Body Tip Chain1 CH11.....	12

Test Laboratory: Compliance Certification Services Inc.

Date: 6/27/2015

WIFI-Body Horizontal-Up Chain0 CH1**DUT: WLAN 11n USB Adapter; Type: WL-7200-V2; Serial: N/A**

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;

Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.878$ S/m; $\epsilon_r = 52.827$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(6.82, 6.82, 6.82); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/Front Chain0 CH1/Area Scan (8x6x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.342 W/kg


WIFI/Front Chain0 CH1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.84 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 0.626 W/kg

SAR(1 g) = 0.209 W/kg; SAR(10 g) = 0.083 W/kg

Maximum value of SAR (measured) = 0.370 W/kg

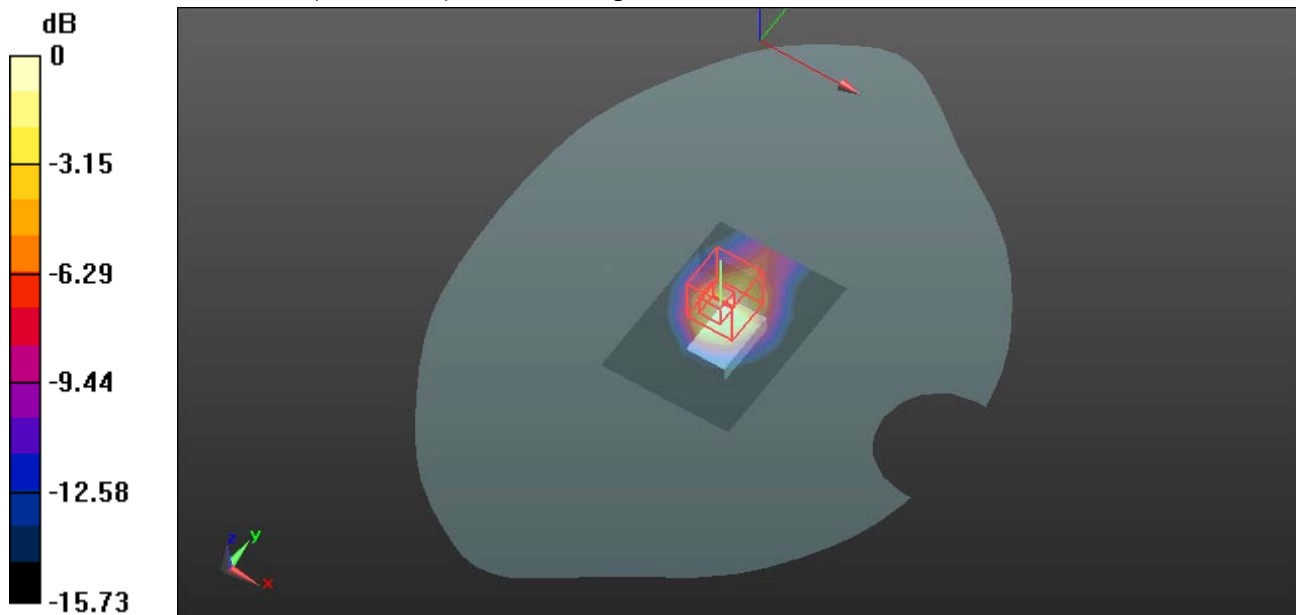

0 dB = 0.370 W/kg = -4.32 dBW/kg

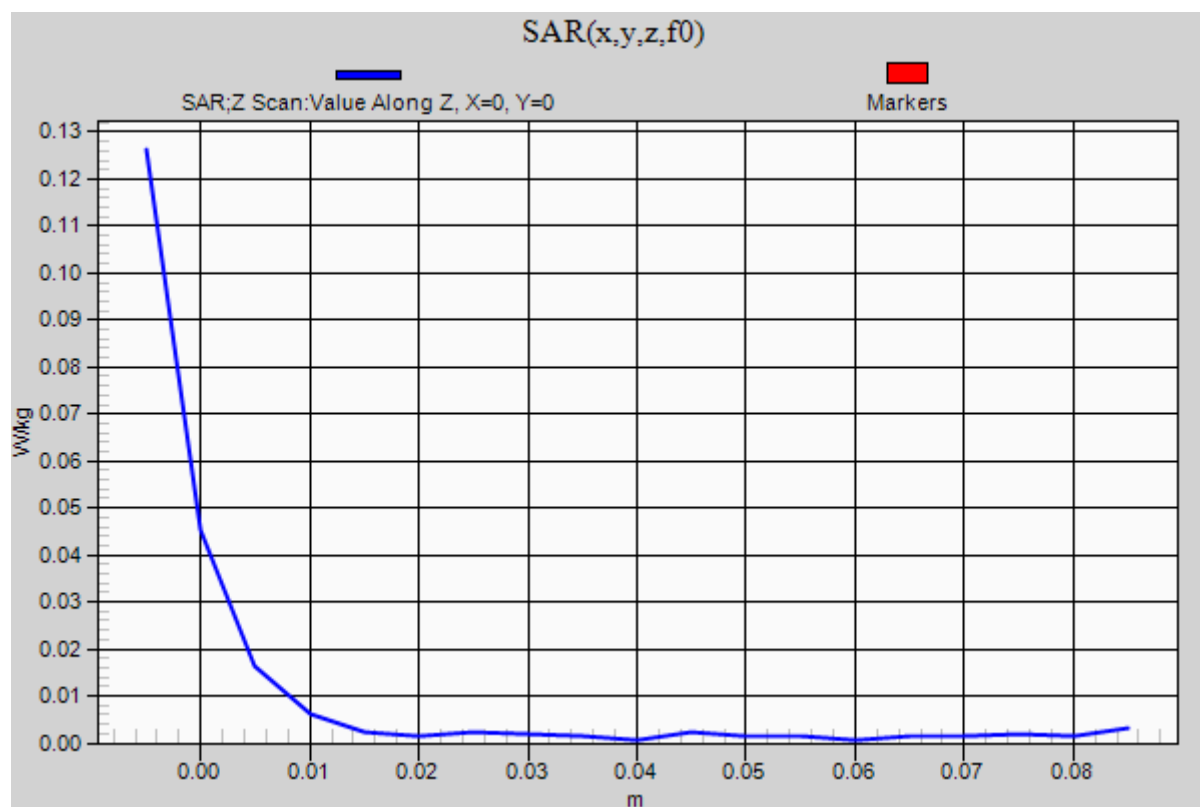

Test Laboratory: Compliance Certification Services Inc.

Date: 6/27/2015

WIFI-Body Horizontal-Down Chain0 CH1**DUT: WLAN 11n USB Adapter; Type: WL-7200-V2; Serial: N/A**

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;

Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.878$ S/m; $\epsilon_r = 52.827$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(6.82, 6.82, 6.82); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/Rear Chain0 CH1/Area Scan (8x6x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.185 W/kg


WIFI/Rear Chain0 CH1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.32 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.389 W/kg

SAR(1 g) = 0.132 W/kg; SAR(10 g) = 0.050 W/kg

Maximum value of SAR (measured) = 0.231 W/kg

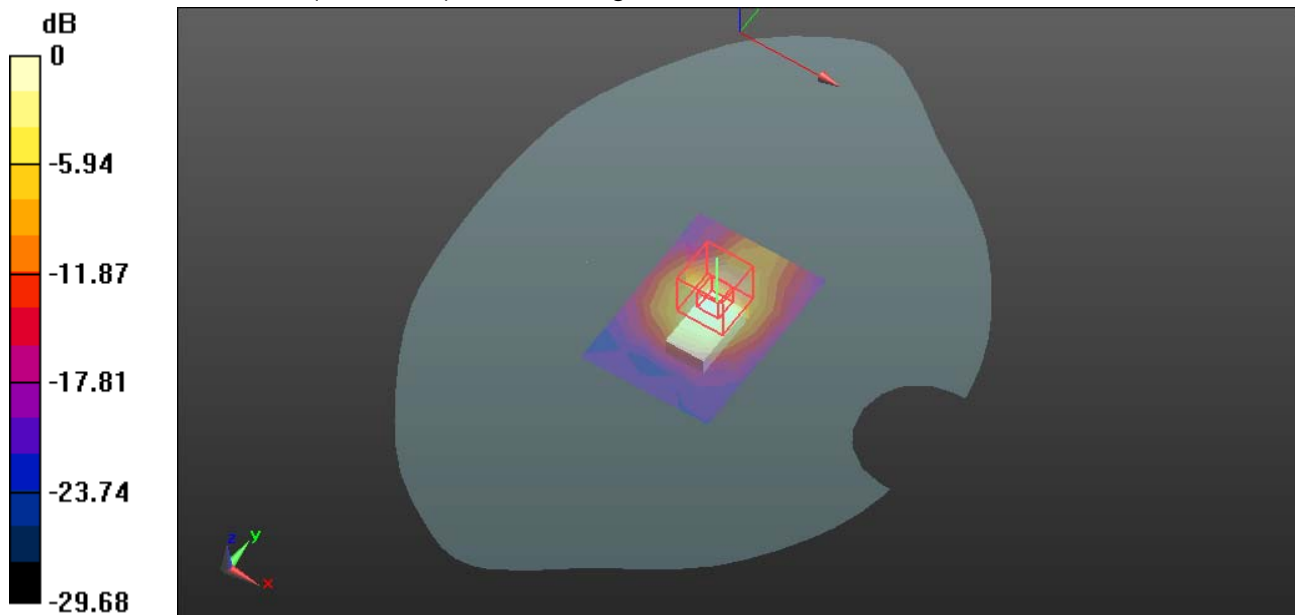

0 dB = 0.231 W/kg = -6.36 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/27/2015

WIFI-Body Vertical-Front Chain0 CH1**DUT: WLAN 11n USB Adapter; Type: WL-7200-V2; Serial: N/A**

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;

Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.878$ S/m; $\epsilon_r = 52.827$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(6.82, 6.82, 6.82); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/C Chain0 CH1/Area Scan (8x6x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.281 W/kg


WIFI/C Chain0 CH1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.36 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.626 W/kg

SAR(1 g) = 0.167 W/kg; SAR(10 g) = 0.057 W/kg

Maximum value of SAR (measured) = 0.312 W/kg

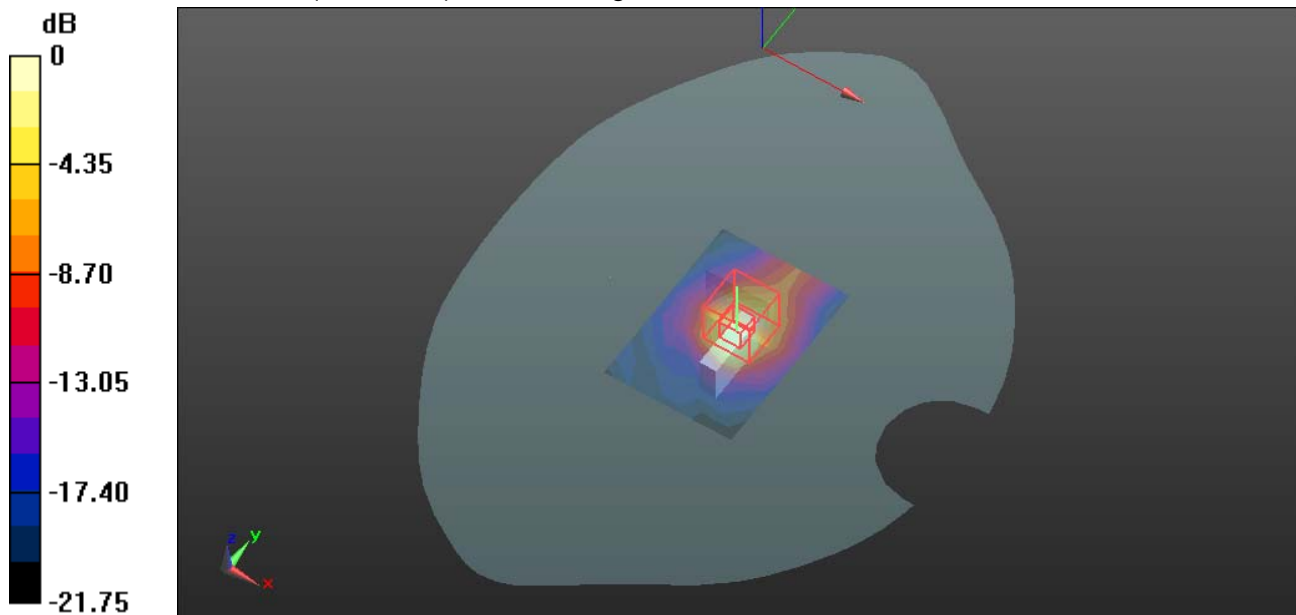

0 dB = 0.312 W/kg = -5.06 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/27/2015

WIFI-Body Vertical-Back Chain0 CH1**DUT: WLAN 11n USB Adapter; Type: WL-7200-V2; Serial: N/A**

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;

Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.878$ S/m; $\epsilon_r = 52.827$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(6.82, 6.82, 6.82); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/D Chain0 CH1/Area Scan (8x6x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0928 W/kg


WIFI/D Chain0 CH1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.891 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.190 W/kg

SAR(1 g) = 0.056 W/kg; SAR(10 g) = 0.022 W/kg

Maximum value of SAR (measured) = 0.101 W/kg

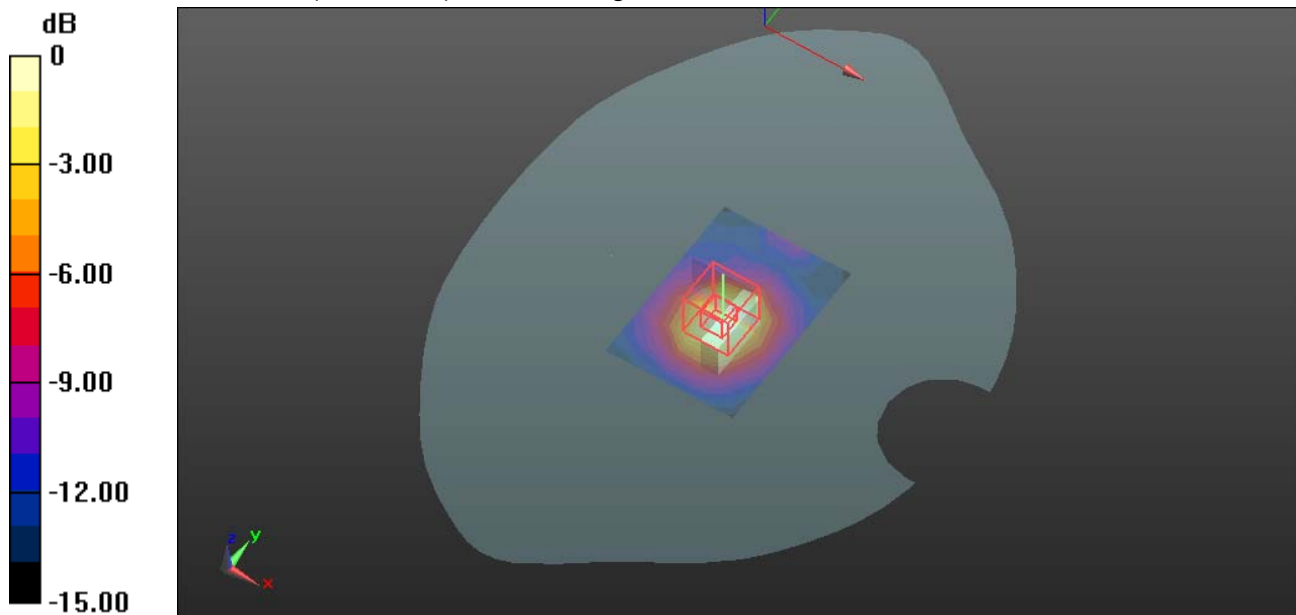

0 dB = 0.101 W/kg = -9.96 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/27/2015

WIFI-Body Tip Chain0 CH1**DUT: WLAN 11n USB Adapter; Type: WL-7200-V2; Serial: N/A**

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;

Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.878$ S/m; $\epsilon_r = 52.827$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(6.82, 6.82, 6.82); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/C Chain0 CH1/Area Scan (8x6x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0399 W/kg


WIFI/C Chain0 CH1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.263 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.128 W/kg

SAR(1 g) = 0.023 W/kg; SAR(10 g) = 0.0073 W/kg

Maximum value of SAR (measured) = 0.0453 W/kg

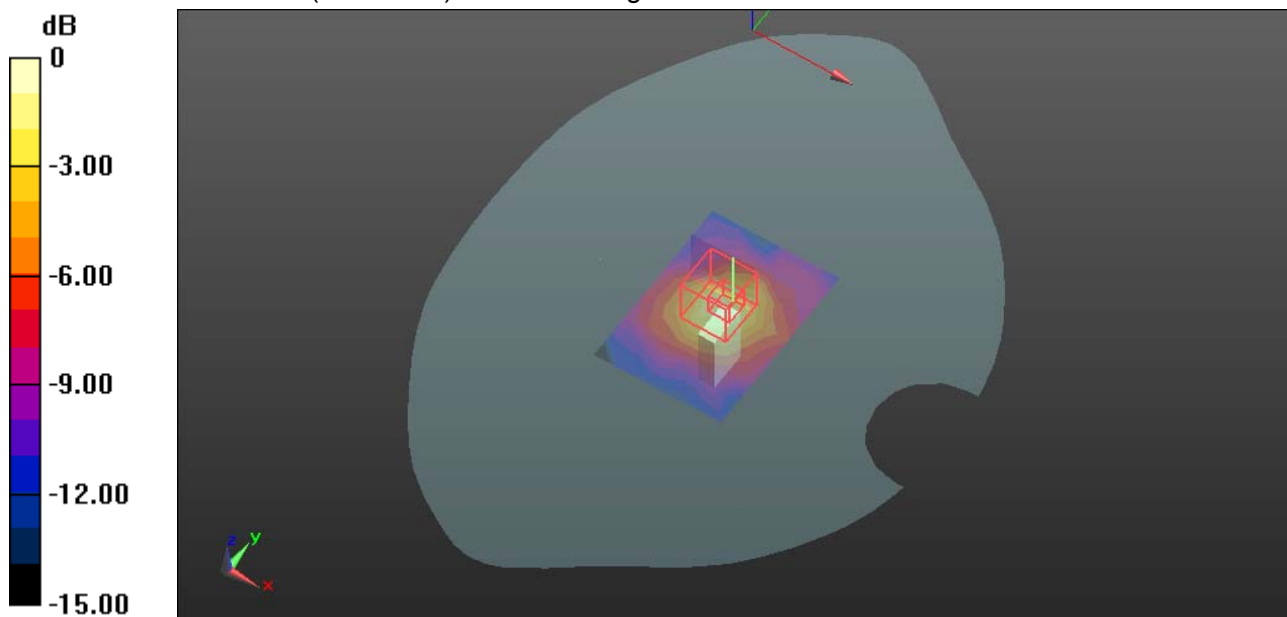

0 dB = 0.0453 W/kg = -13.44 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/27/2015

WIFI-Body Horizontal-Up Chain1 CH11**DUT: WLAN 11n USB Adapter; Type: WL-7200-V2; Serial: N/A**

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;

Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.904$ S/m; $\epsilon_r = 52.553$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(6.82, 6.82, 6.82); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/Front Chain1 CH11/Area Scan (8x6x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.127 W/kg


WIFI/Front Chain1 CH11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.906 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.474 W/kg

SAR(1 g) = 0.083 W/kg; SAR(10 g) = 0.035 W/kg

Maximum value of SAR (measured) = 0.139 W/kg

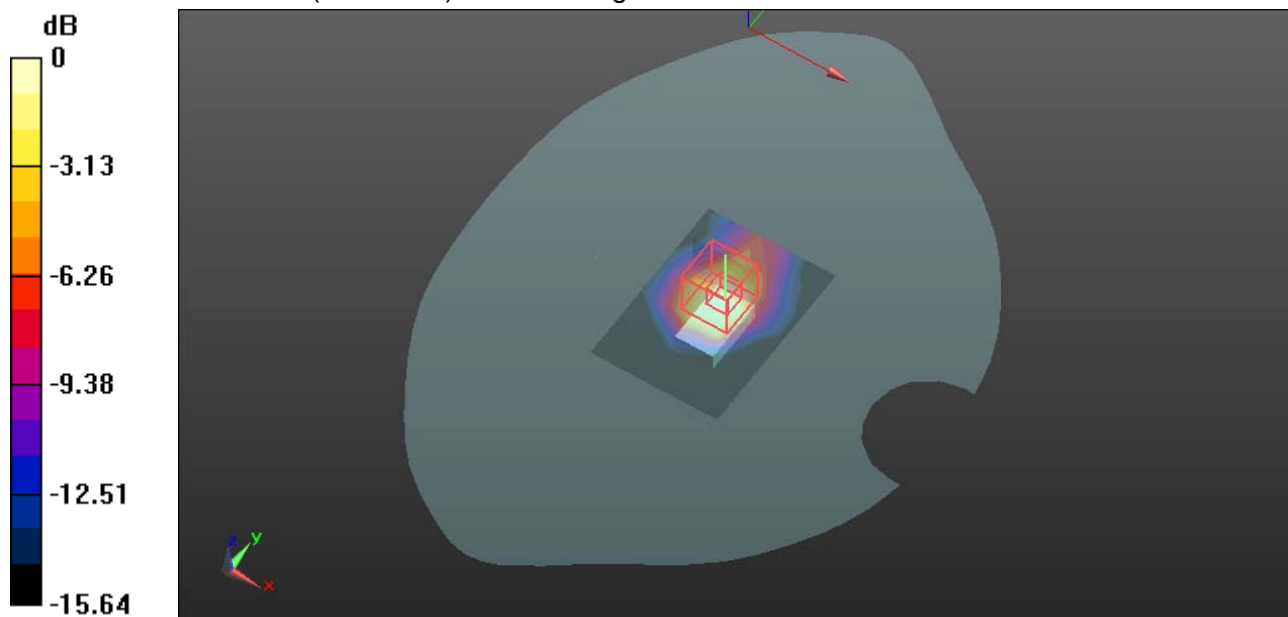

0 dB = 0.139 W/kg = -8.57 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/27/2015

WIFI-Body Horizontal-Down Chain1 CH11

DUT: WLAN 11n USB Adapter; Type: WL-7200-V2; Serial: N/A

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;

Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.904$ S/m; $\epsilon_r = 52.553$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(6.82, 6.82, 6.82); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/Rear Chain1 CH11/Area Scan (8x6x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.244 W/kg


WIFI/Rear Chain1 CH11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.335 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.532 W/kg

SAR(1 g) = 0.119 W/kg; SAR(10 g) = 0.039 W/kg

Maximum value of SAR (measured) = 0.225 W/kg

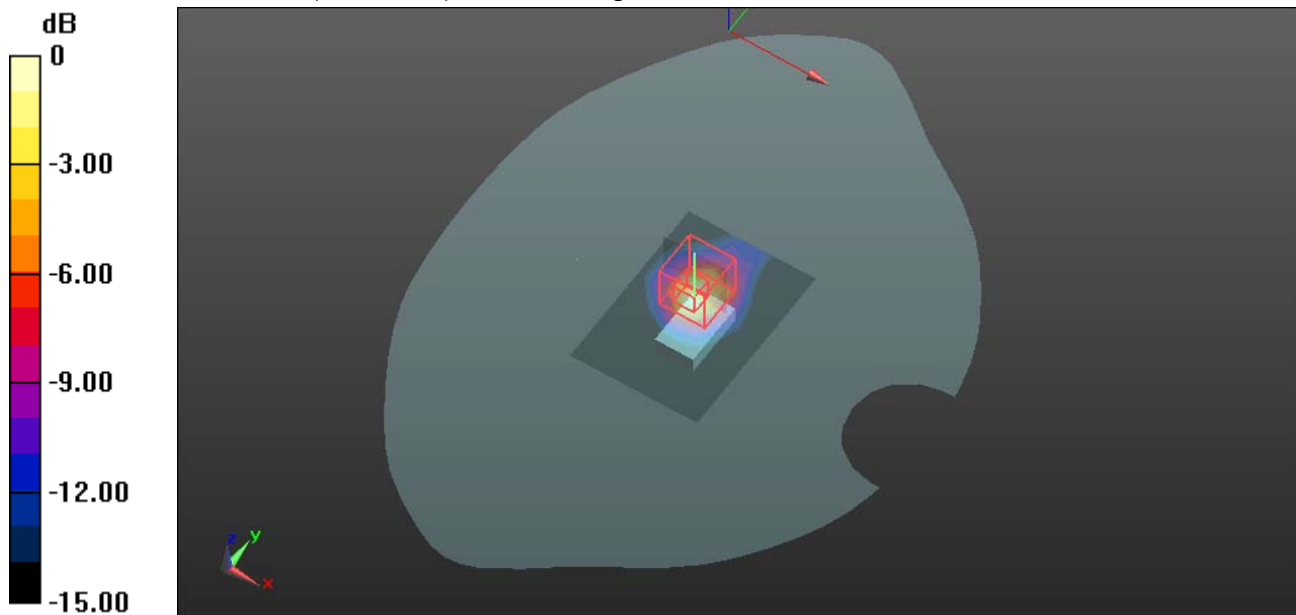

0 dB = 0.225 W/kg = -6.48 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/27/2015

WIFI-Body Vertical-Front Chain1 CH11**DUT: WLAN 11n USB Adapter; Type: WL-7200-V2; Serial: N/A**

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;

Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.904$ S/m; $\epsilon_r = 52.553$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(6.82, 6.82, 6.82); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/C Chain1 CH11/Area Scan (8x6x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0421 W/kg


WIFI/C Chain1 CH11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.611 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.0820 W/kg

SAR(1 g) = 0.023 W/kg; SAR(10 g) = 0.00885 W/kg

Maximum value of SAR (measured) = 0.0482 W/kg

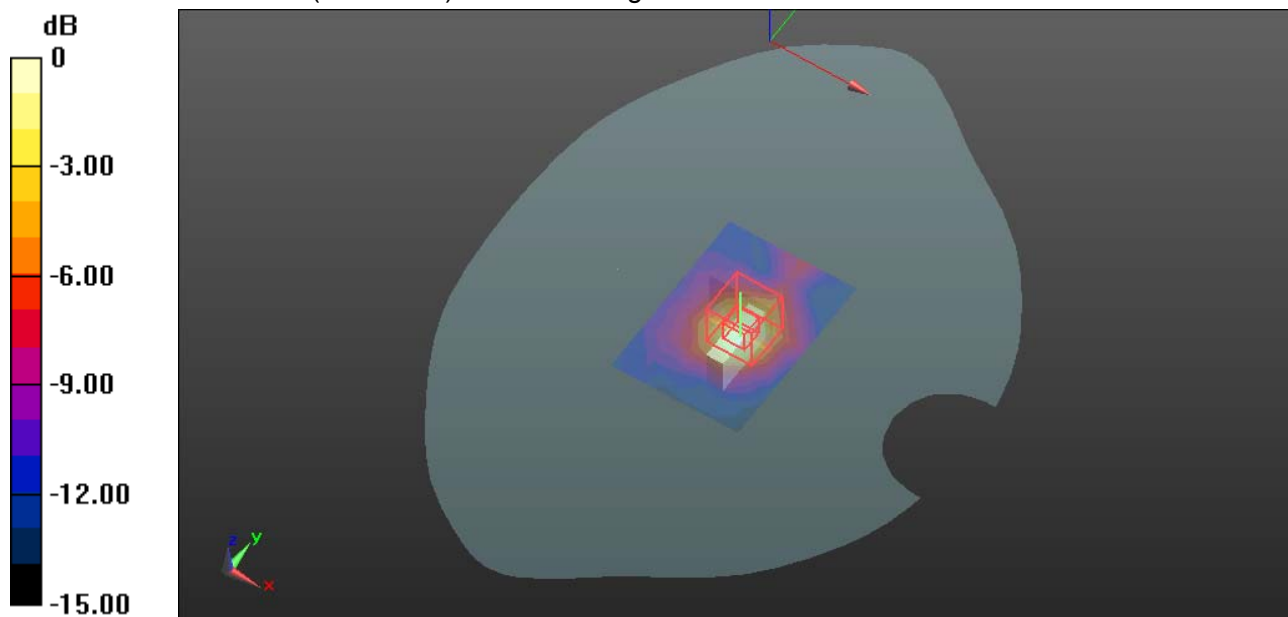

Test Laboratory: Compliance Certification Services Inc.

Date: 6/27/2015

WIFI-Body Vertical-Back Chain1 CH11**DUT: WLAN 11n USB Adapter; Type: WL-7200-V2; Serial: N/A**

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;

Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.904$ S/m; $\epsilon_r = 52.553$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(6.82, 6.82, 6.82); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/D Chain1 CH11/Area Scan (8x6x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.139 W/kg


WIFI/D Chain1 CH11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.09 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.431 W/kg

SAR(1 g) = 0.123 W/kg; SAR(10 g) = 0.042 W/kg

Maximum value of SAR (measured) = 0.235 W/kg

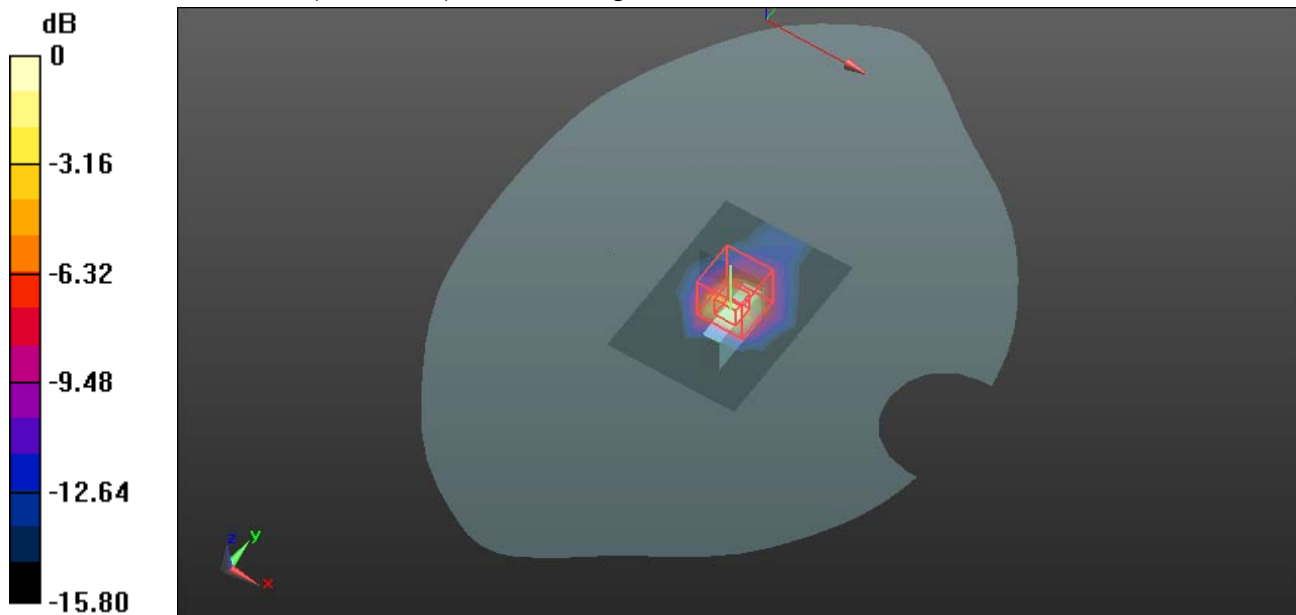

0 dB = 0.235 W/kg = -6.29 dBW/kg

Test Laboratory: Compliance Certification Services Inc.

Date: 6/27/2015

WIFI-Body Tip Chain1 CH11**DUT: WLAN 11n USB Adapter; Type: WL-7200-V2; Serial: N/A**

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;

Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.904$ S/m; $\epsilon_r = 52.553$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(6.82, 6.82, 6.82); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

WIFI/C Chain1 CH11/Area Scan (8x6x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0146 W/kg


WIFI/C Chain1 CH11/Zoom Scan (7x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.213 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.0470 W/kg

SAR(1 g) = 0.00742 W/kg; SAR(10 g) = 0.00232 W/kg

Maximum value of SAR (measured) = 0.0184 W/kg

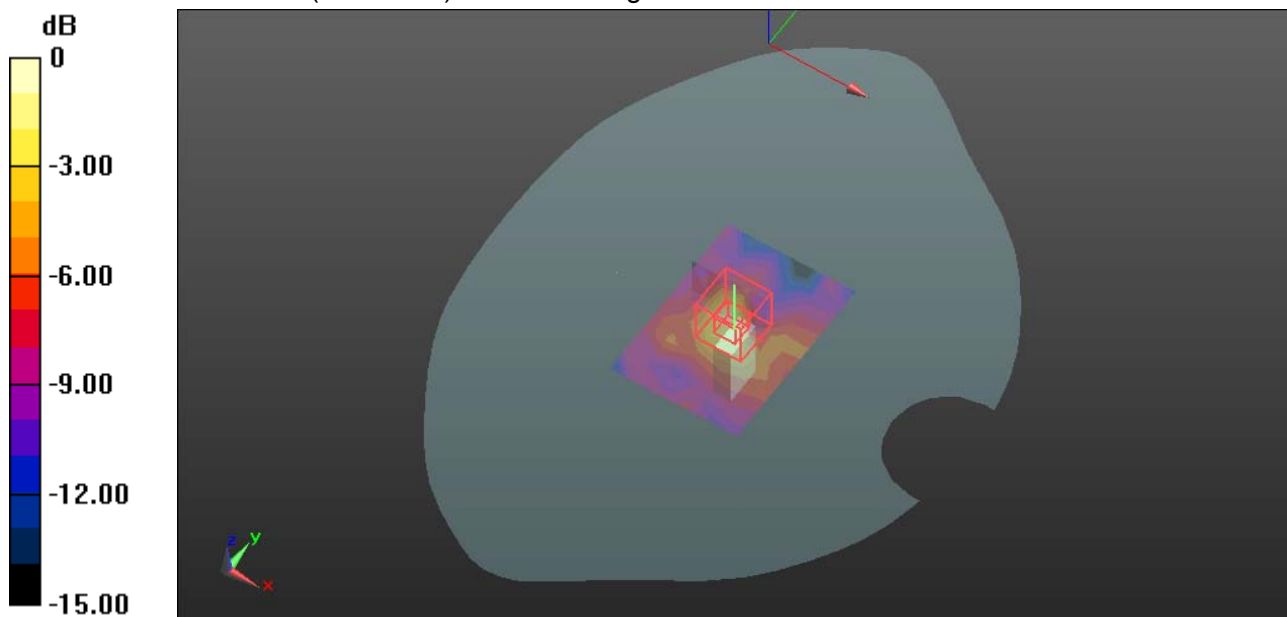

0 dB = 0.0184 W/kg = -17.35 dBW/kg