



Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5320 MHz		
Polarization:	Horizontal		
Remark:			

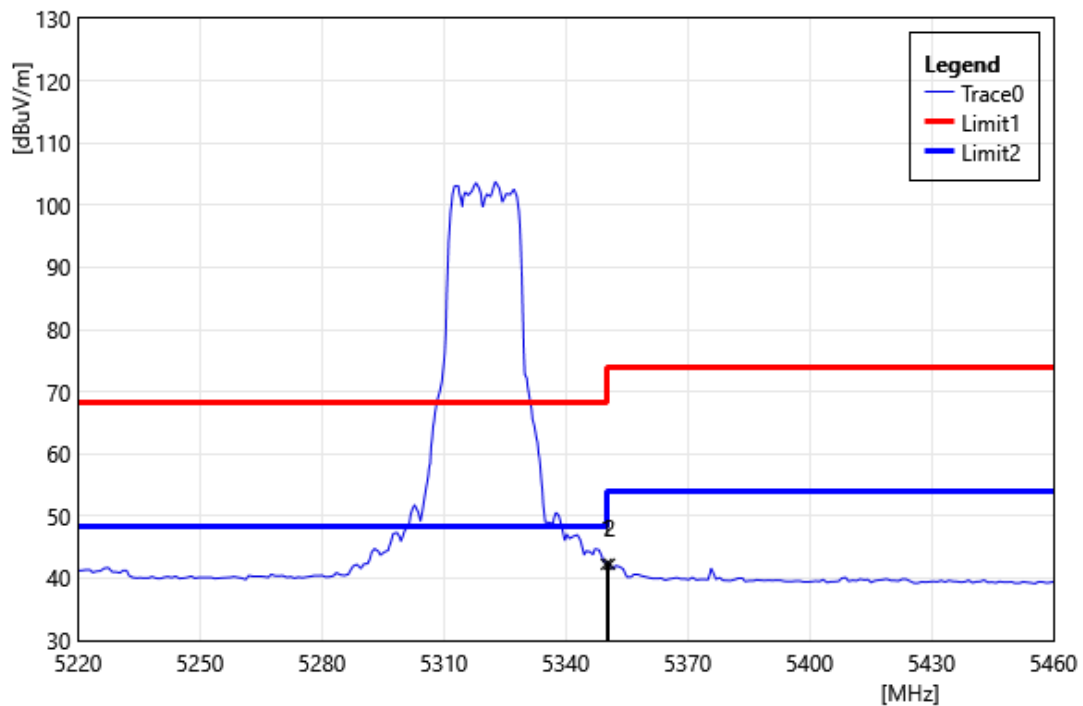


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	43.53	-1.29	42.24	54.00	-11.76	AVG
2	5350.80	43.55	-1.29	42.26	54.00	-11.74	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5500 MHz		
Polarization:	Vertical		
Remark:			

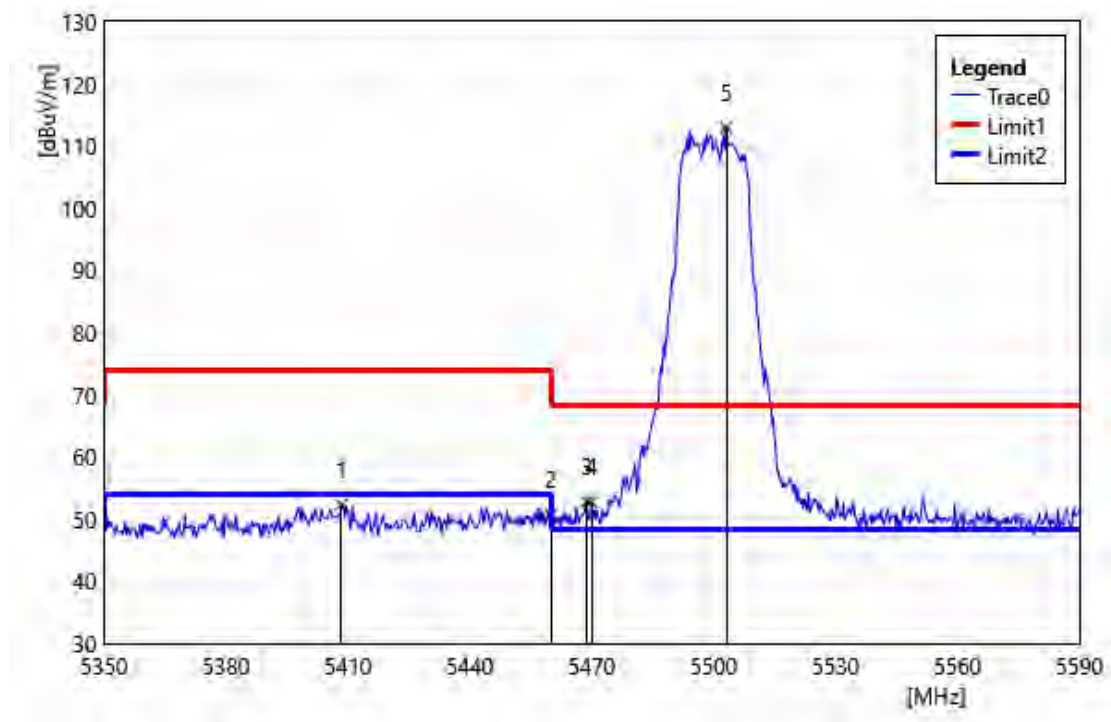


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5408.32	53.17	-0.88	52.29	74.00	-21.71	PEAK
2	5460.00	51.19	-0.57	50.62	74.00	-23.38	PEAK
3	5468.80	53.36	-0.56	52.80	68.20	-15.40	PEAK
4	5470.00	53.29	-0.56	52.73	68.20	-15.47	PEAK
5	5503.12	113.44	-0.53	112.91	68.20	44.71	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5500 MHz		
Polarization:	Horizontal		
Remark:			

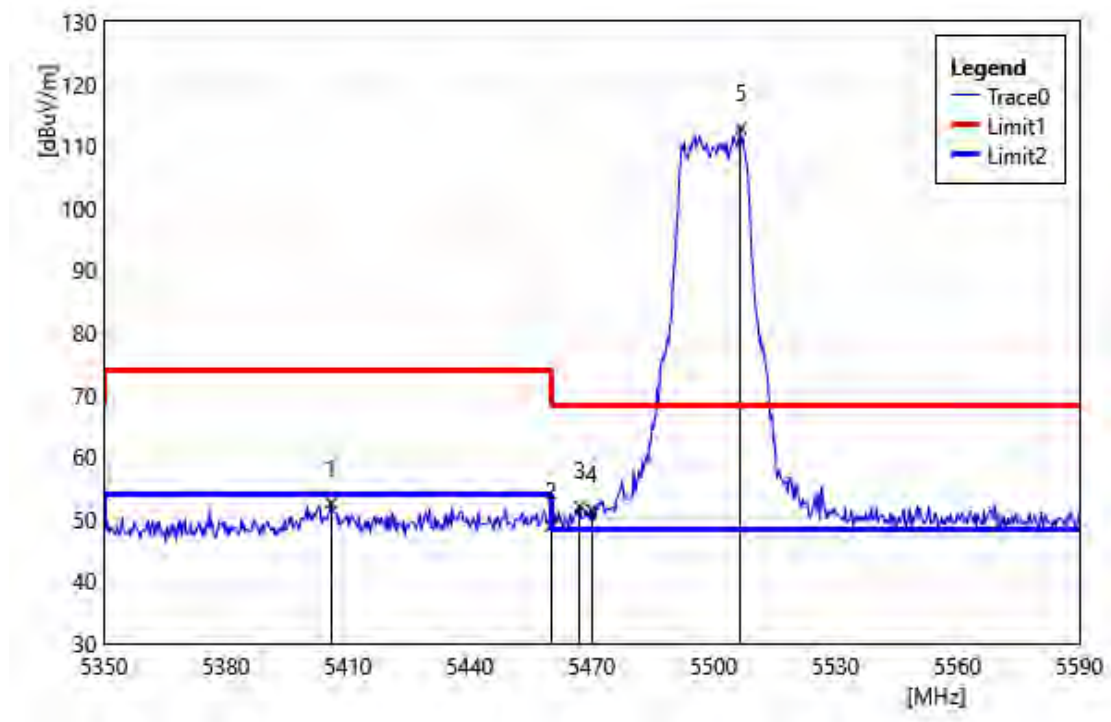


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5405.92	53.48	-0.90	52.58	74.00	-21.42	PEAK
2	5460.00	49.41	-0.57	48.84	74.00	-25.16	PEAK
3	5467.12	52.63	-0.57	52.06	68.20	-16.14	PEAK
4	5470.00	52.08	-0.56	51.52	68.20	-16.68	PEAK
5	5506.72	113.38	-0.53	112.85	68.20	44.65	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5500 MHz		
Polarization:	Vertical		
Remark:			

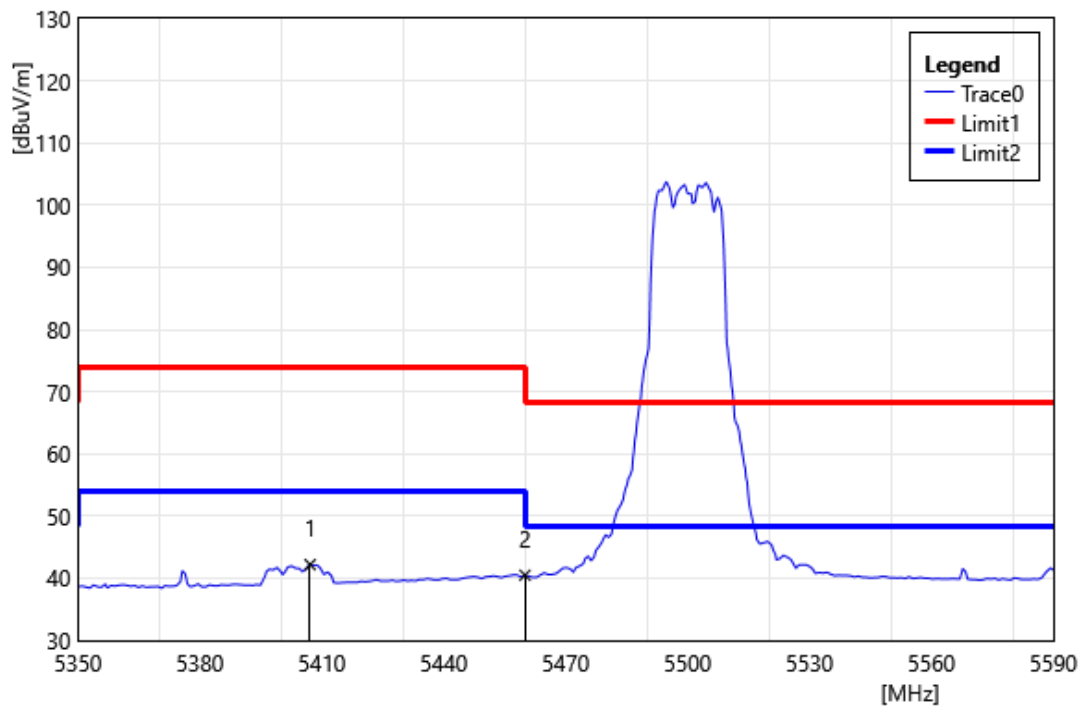


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5407.12	43.08	-0.89	42.19	54.00	-11.81	AVG
2	5460.00	41.06	-0.57	40.49	54.00	-13.51	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5500 MHz		
Polarization:	Horizontal		
Remark:			

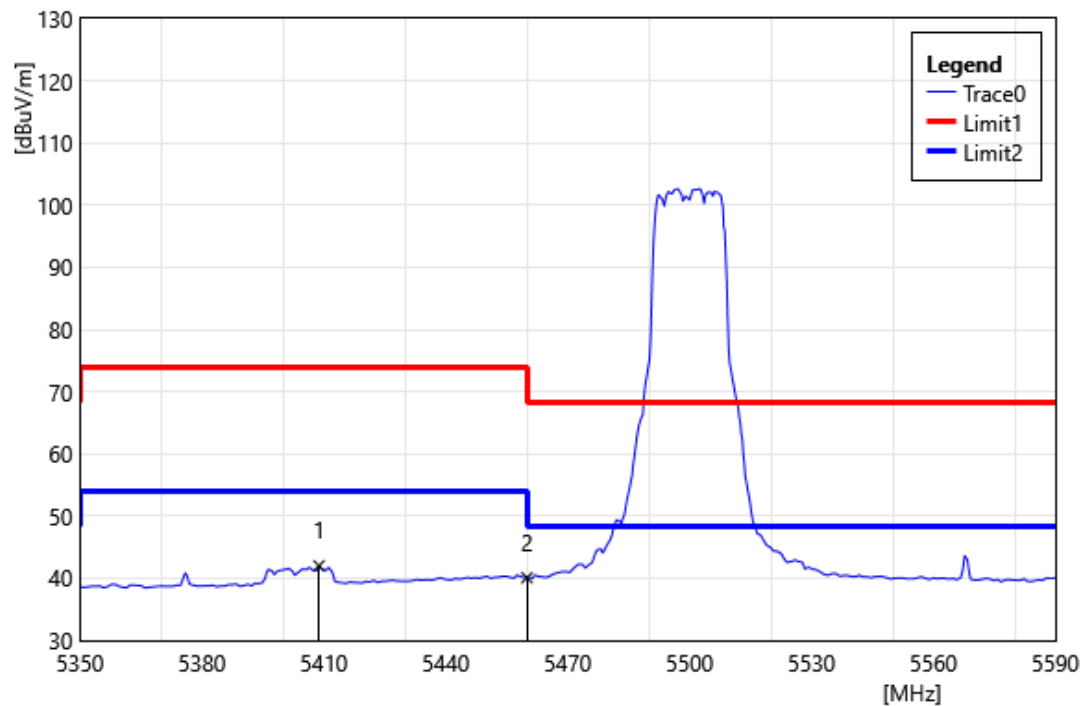


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5408.80	42.86	-0.88	41.98	54.00	-12.02	AVG
2	5460.00	40.64	-0.57	40.07	54.00	-13.93	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5560 MHz		
Polarization:	Vertical		
Remark:			

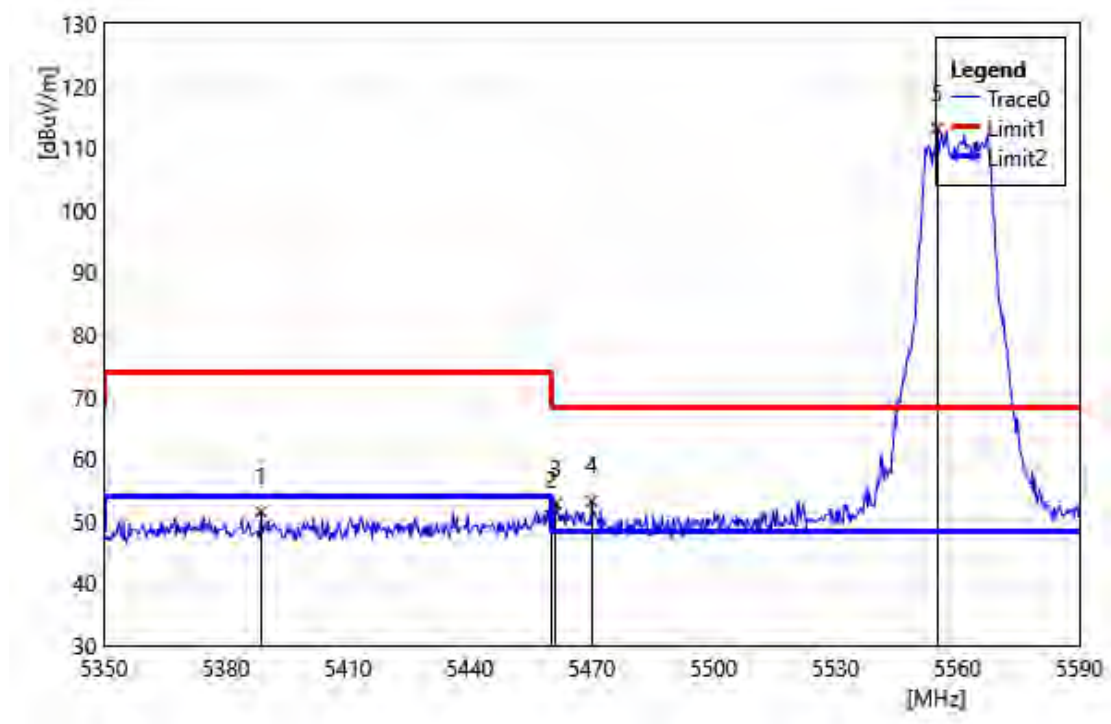


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5388.64	52.51	-1.02	51.49	74.00	-22.51	PEAK
2	5460.00	51.40	-0.57	50.83	74.00	-23.17	PEAK
3	5461.12	53.36	-0.57	52.79	68.20	-15.41	PEAK
4	5470.00	53.77	-0.56	53.21	68.20	-14.99	PEAK
5	5554.96	113.68	-0.51	113.17	68.20	44.97	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5560 MHz		
Polarization:	Horizontal		
Remark:			

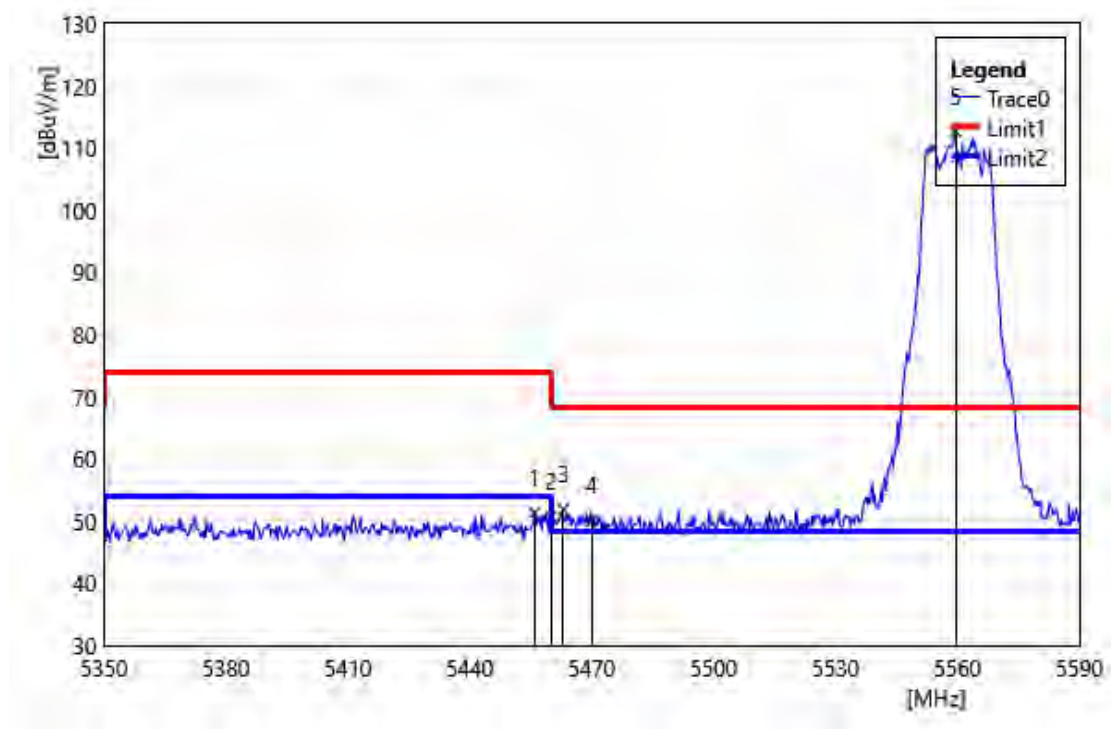


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5455.84	51.97	-0.58	51.39	74.00	-22.61	PEAK
2	5460.00	51.25	-0.57	50.68	74.00	-23.32	PEAK
3	5463.04	52.44	-0.57	51.87	68.20	-16.33	PEAK
4	5470.00	50.57	-0.56	50.01	68.20	-18.19	PEAK
5	5559.52	113.18	-0.51	112.68	68.20	44.48	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5560 MHz		
Polarization:	Vertical		
Remark:			

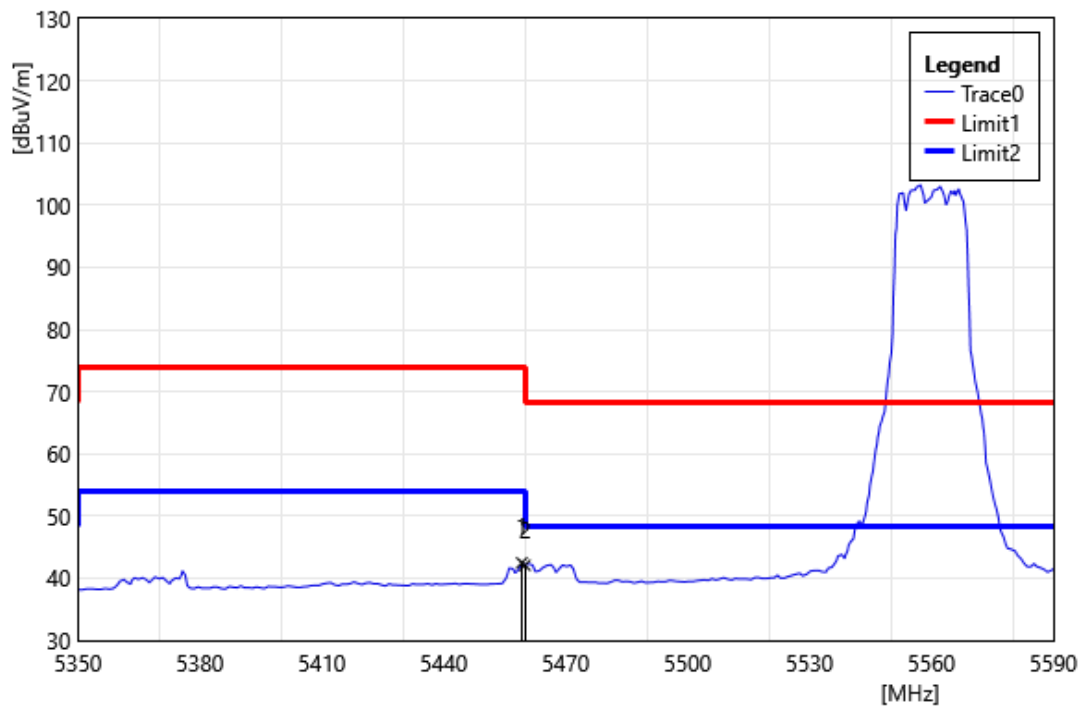


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5459.20	43.04	-0.57	42.47	54.00	-11.53	AVG
2	5460.00	42.65	-0.57	42.08	54.00	-11.92	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5560 MHz		
Polarization:	Horizontal		
Remark:			

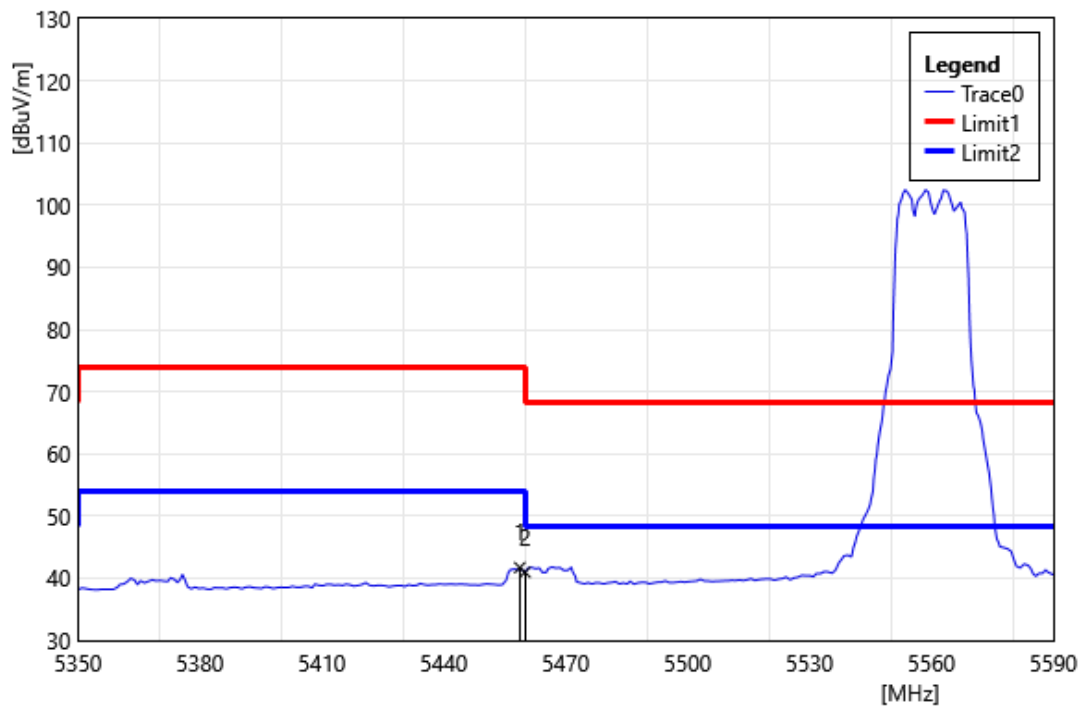


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.72	42.29	-0.57	41.72	54.00	-12.28	AVG
2	5460.00	41.54	-0.57	40.97	54.00	-13.03	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5700 MHz		
Polarization:	Vertical		
Remark:			

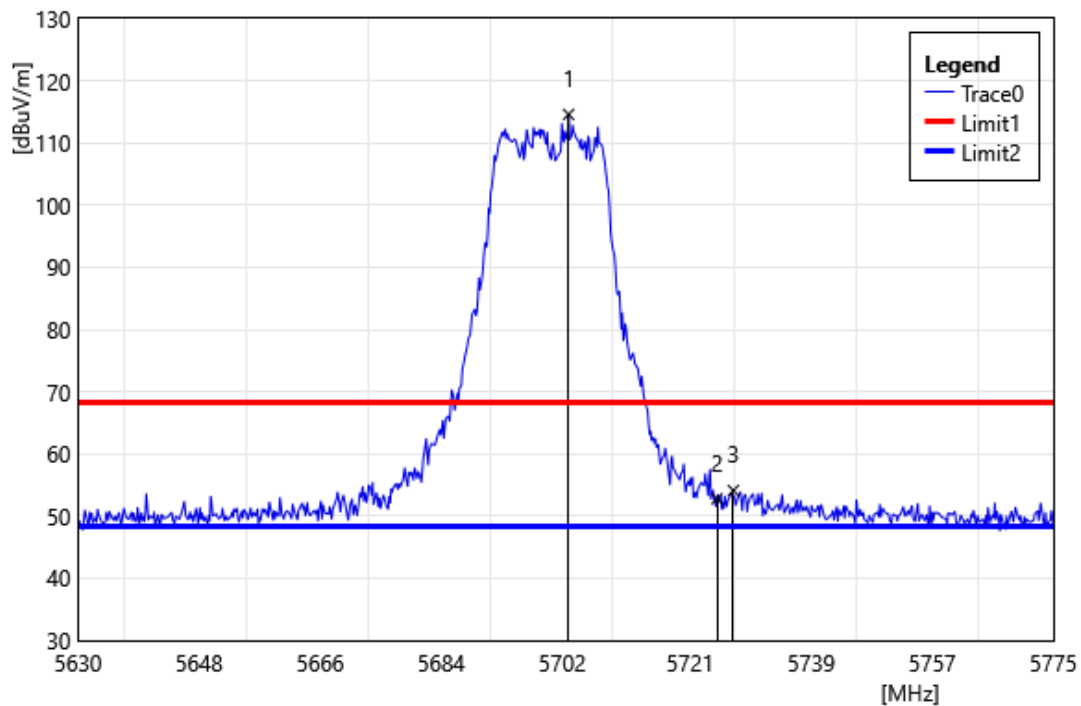


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5702.94	115.18	-0.58	114.60	68.20	46.40	PEAK
2	5725.00	53.13	-0.34	52.79	68.20	-15.41	PEAK
3	5727.44	54.43	-0.32	54.11	68.20	-14.09	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5700 MHz		
Polarization:	Horizontal		
Remark:			

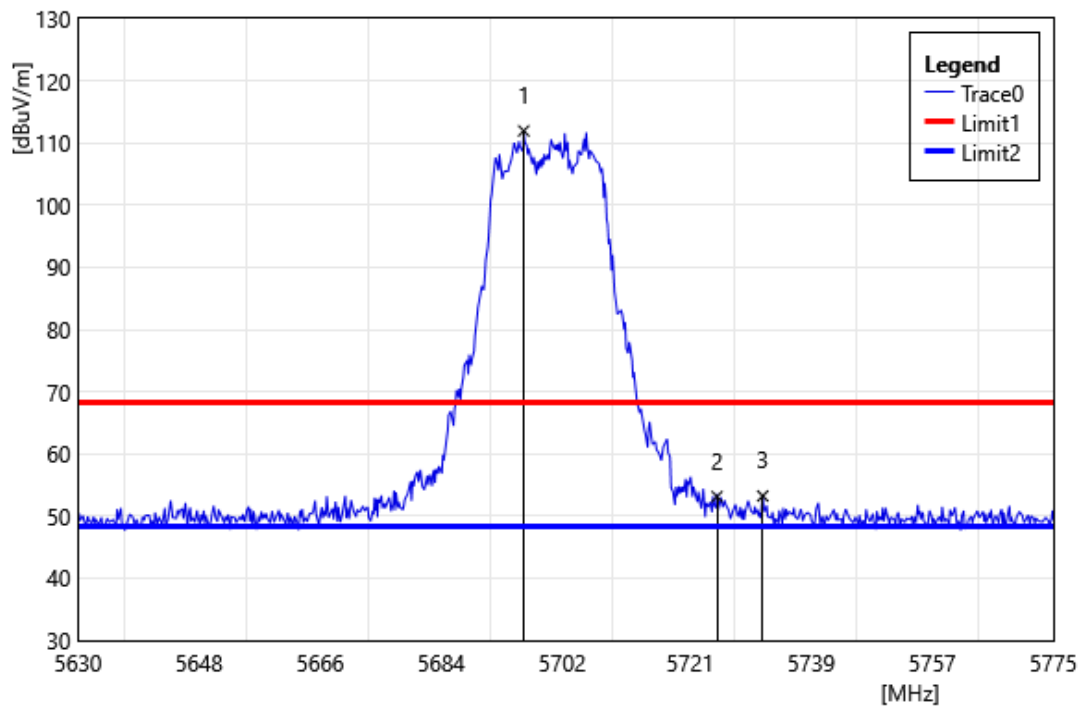


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5696.27	112.56	-0.61	111.95	68.20	43.75	PEAK
2	5725.00	53.47	-0.34	53.13	68.20	-15.07	PEAK
3	5731.79	53.50	-0.27	53.23	68.20	-14.97	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5720 MHz		
Polarization:	Vertical		
Remark:			

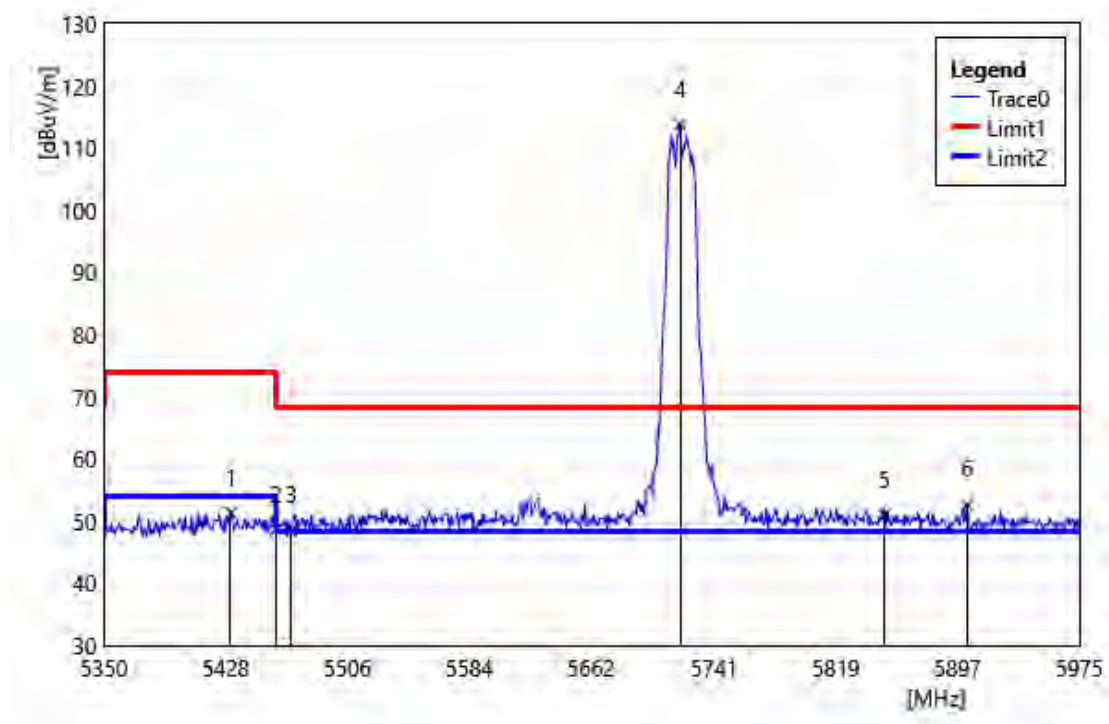


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5431.25	52.09	-0.72	51.37	74.00	-22.63	PEAK
2	5460.00	49.21	-0.57	48.64	74.00	-25.36	PEAK
3	5470.00	49.00	-0.56	48.44	68.20	-19.76	PEAK
4	5719.38	114.18	-0.40	113.78	68.20	45.58	PEAK
5	5850.00	50.71	0.28	50.99	68.20	-17.21	PEAK
6	5903.13	52.29	0.39	52.68	68.20	-15.52	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5720 MHz		
Polarization:	Horizontal		
Remark:			

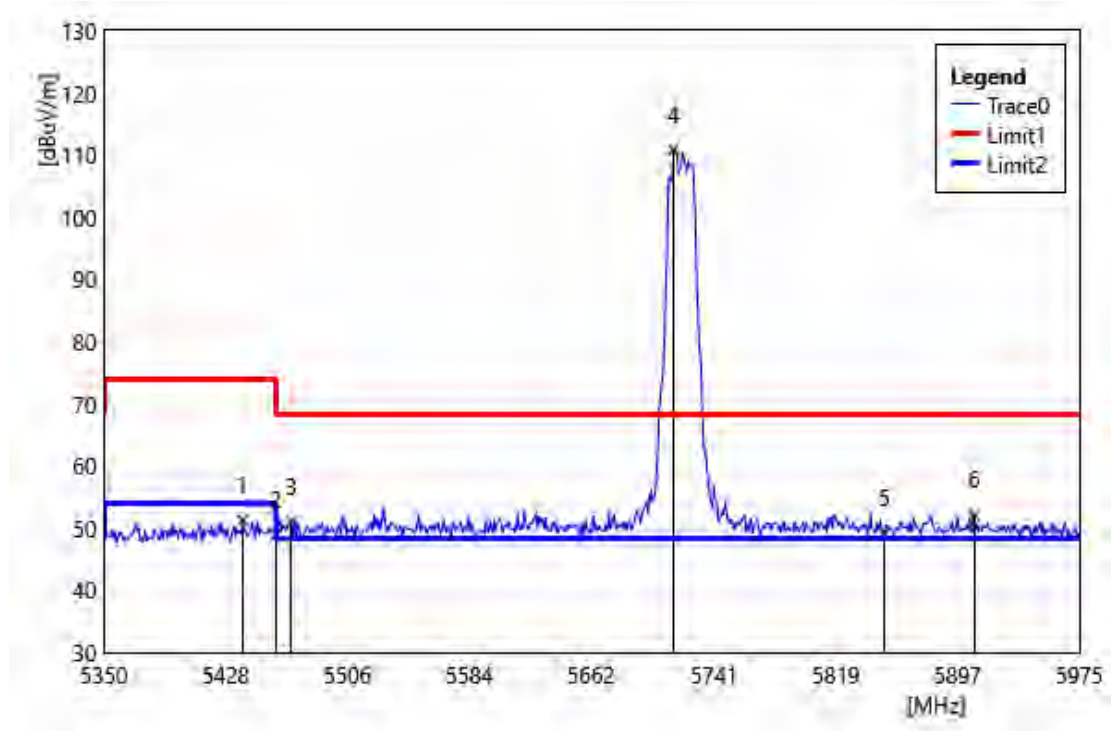


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5438.75	51.89	-0.66	51.23	74.00	-22.77	PEAK
2	5460.00	49.48	-0.57	48.91	74.00	-25.09	PEAK
3	5470.00	51.58	-0.56	51.02	68.20	-17.18	PEAK
4	5715.00	111.33	-0.45	110.88	68.20	42.68	PEAK
5	5850.00	48.85	0.28	49.13	68.20	-19.07	PEAK
6	5907.50	51.77	0.37	52.14	68.20	-16.06	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5720 MHz		
Polarization:	Vertical		
Remark:			

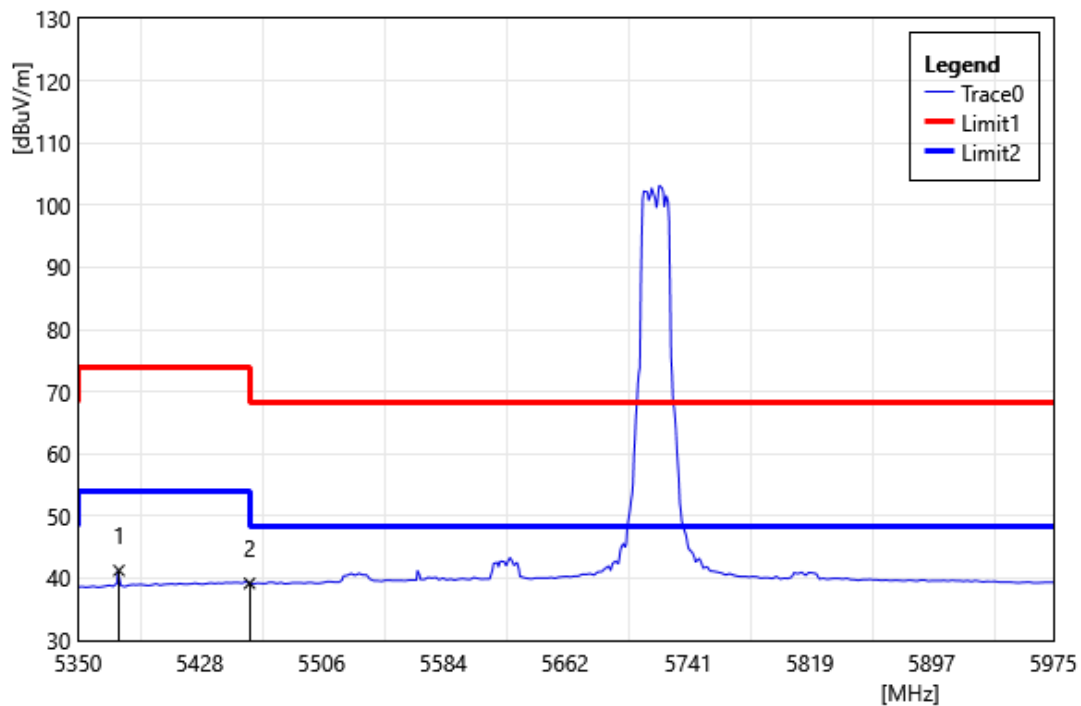


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5376.25	42.36	-1.11	41.25	54.00	-12.75	AVG
2	5460.00	39.74	-0.57	39.17	54.00	-14.83	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5720 MHz		
Polarization:	Horizontal		
Remark:			

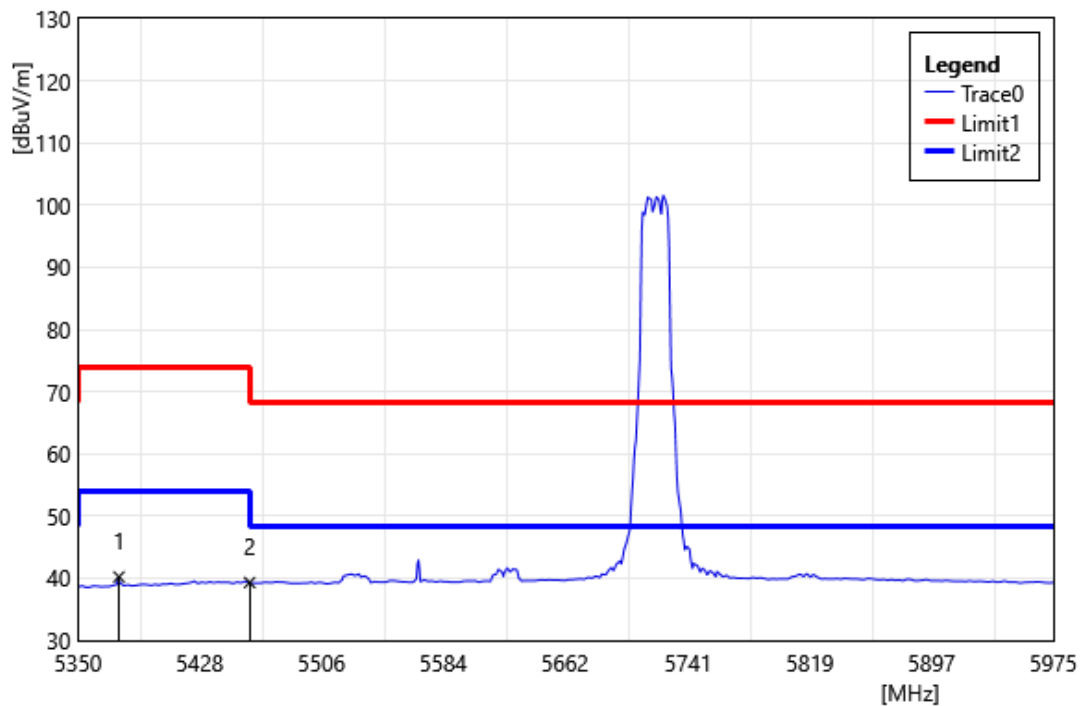


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5376.25	41.31	-1.11	40.20	54.00	-13.80	AVG
2	5460.00	39.88	-0.57	39.31	54.00	-14.69	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5745 MHz		
Polarization:	Vertical		
Remark:			

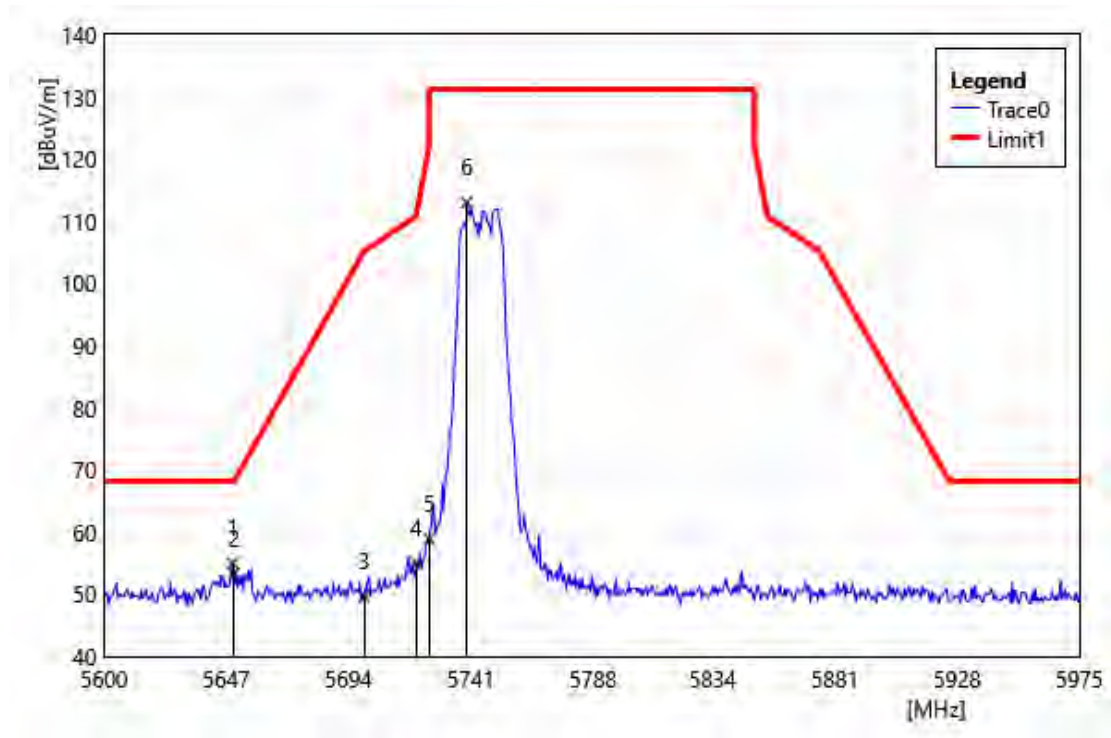


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5649.50	55.66	-0.64	55.02	68.20	-13.18	PEAK
2	5650.00	53.97	-0.64	53.33	68.20	-14.87	PEAK
3	5700.00	50.29	-0.61	49.68	105.20	-55.52	PEAK
4	5720.00	55.48	-0.40	55.08	110.80	-55.72	PEAK
5	5725.00	59.27	-0.34	58.93	122.20	-63.27	PEAK
6	5739.50	113.19	-0.19	113.00	131.20	-18.20	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5745 MHz		
Polarization:	Horizontal		
Remark:			

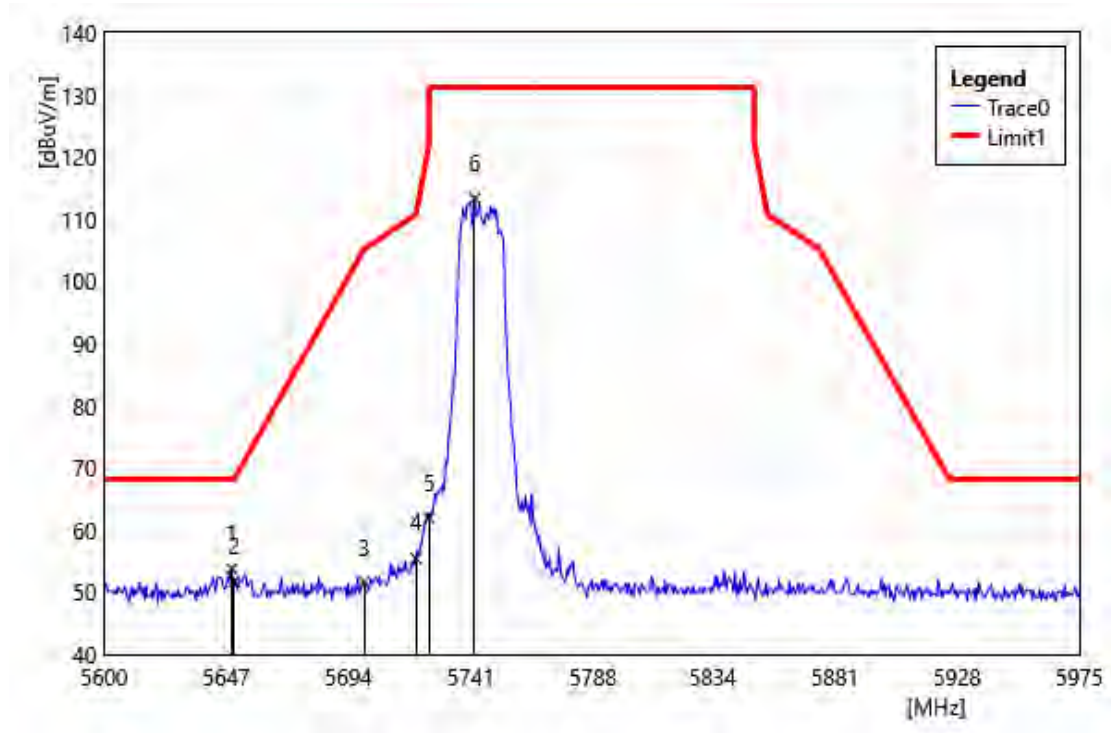


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5649.13	54.44	-0.64	53.80	68.20	-14.40	PEAK
2	5650.00	52.38	-0.64	51.74	68.20	-16.46	PEAK
3	5700.00	52.18	-0.61	51.57	105.20	-53.63	PEAK
4	5720.00	55.85	-0.40	55.45	110.80	-55.35	PEAK
5	5725.00	62.32	-0.34	61.98	122.20	-60.22	PEAK
6	5742.50	113.50	-0.16	113.35	131.20	-17.85	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5785 MHz		
Polarization:	Vertical		
Remark:			

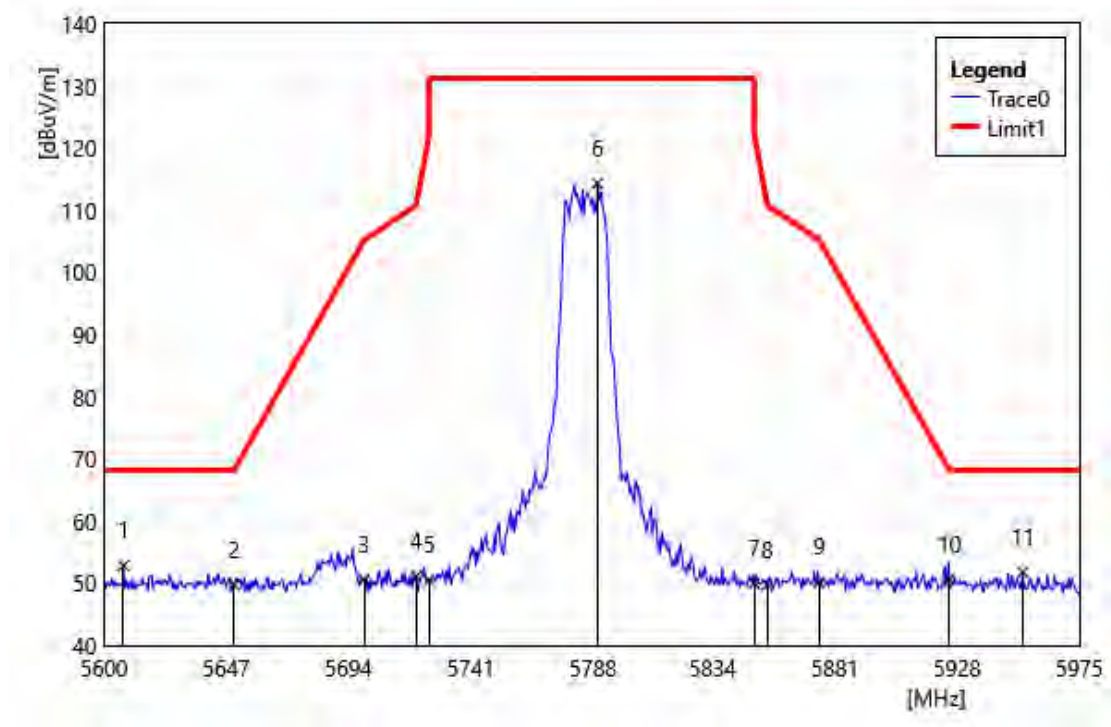


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5607.50	53.43	-0.58	52.85	68.20	-15.35	PEAK
2	5650.00	50.42	-0.64	49.78	68.20	-18.42	PEAK
3	5700.00	51.20	-0.61	50.59	105.20	-54.61	PEAK
4	5720.00	51.57	-0.40	51.17	110.80	-59.63	PEAK
5	5725.00	50.76	-0.34	50.42	122.20	-71.78	PEAK
6	5789.75	114.23	0.10	114.33	131.20	-16.87	PEAK
7	5850.00	49.70	0.28	49.98	122.20	-72.22	PEAK
8	5855.00	49.44	0.29	49.73	110.80	-61.07	PEAK
9	5875.00	49.77	0.34	50.11	105.20	-55.09	PEAK
10	5925.00	50.37	0.28	50.65	68.20	-17.55	PEAK
11	5953.25	51.62	0.15	51.77	68.20	-16.43	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5785 MHz		
Polarization:	Horizontal		
Remark:			

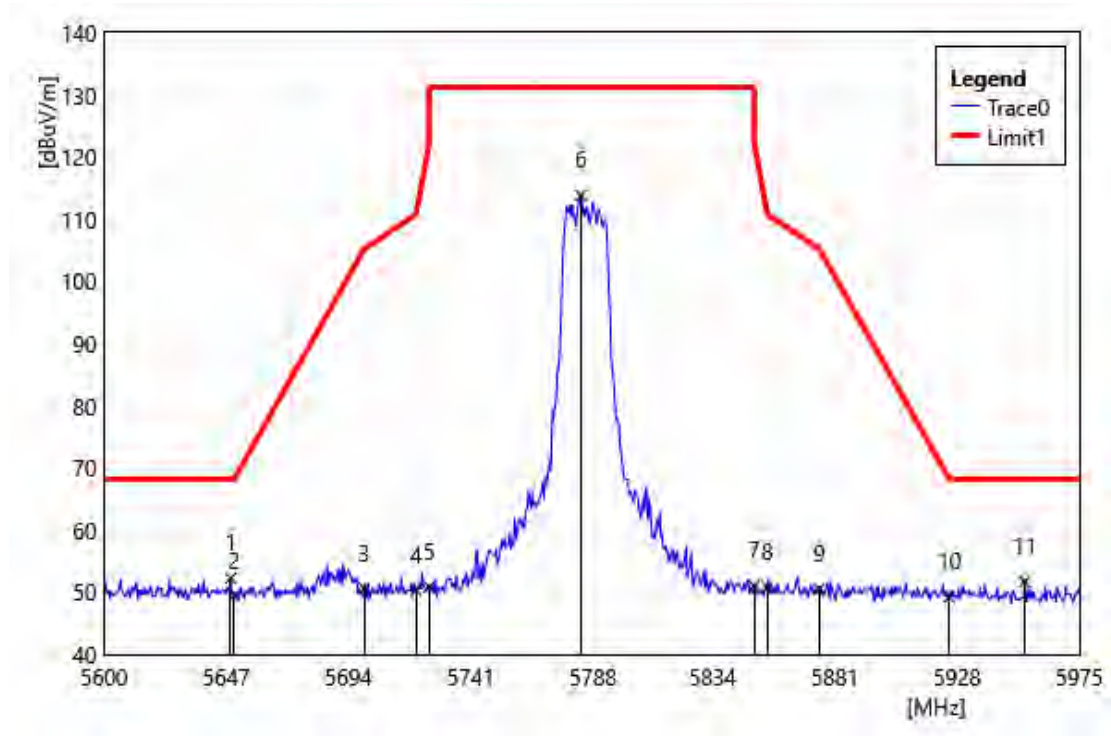


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5648.75	52.90	-0.64	52.26	68.20	-15.94	PEAK
2	5650.00	50.13	-0.64	49.49	68.20	-18.71	PEAK
3	5700.00	51.26	-0.61	50.65	105.20	-54.55	PEAK
4	5720.00	50.71	-0.40	50.31	110.80	-60.49	PEAK
5	5725.00	51.21	-0.34	50.87	122.20	-71.33	PEAK
6	5783.38	113.77	0.07	113.84	131.20	-17.36	PEAK
7	5850.00	50.71	0.28	50.99	122.20	-71.21	PEAK
8	5855.00	50.53	0.29	50.82	110.80	-59.98	PEAK
9	5875.00	50.22	0.34	50.56	105.20	-54.64	PEAK
10	5925.00	48.93	0.28	49.21	68.20	-18.99	PEAK
11	5954.00	51.57	0.15	51.72	68.20	-16.48	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5825 MHz		
Polarization:	Vertical		
Remark:			

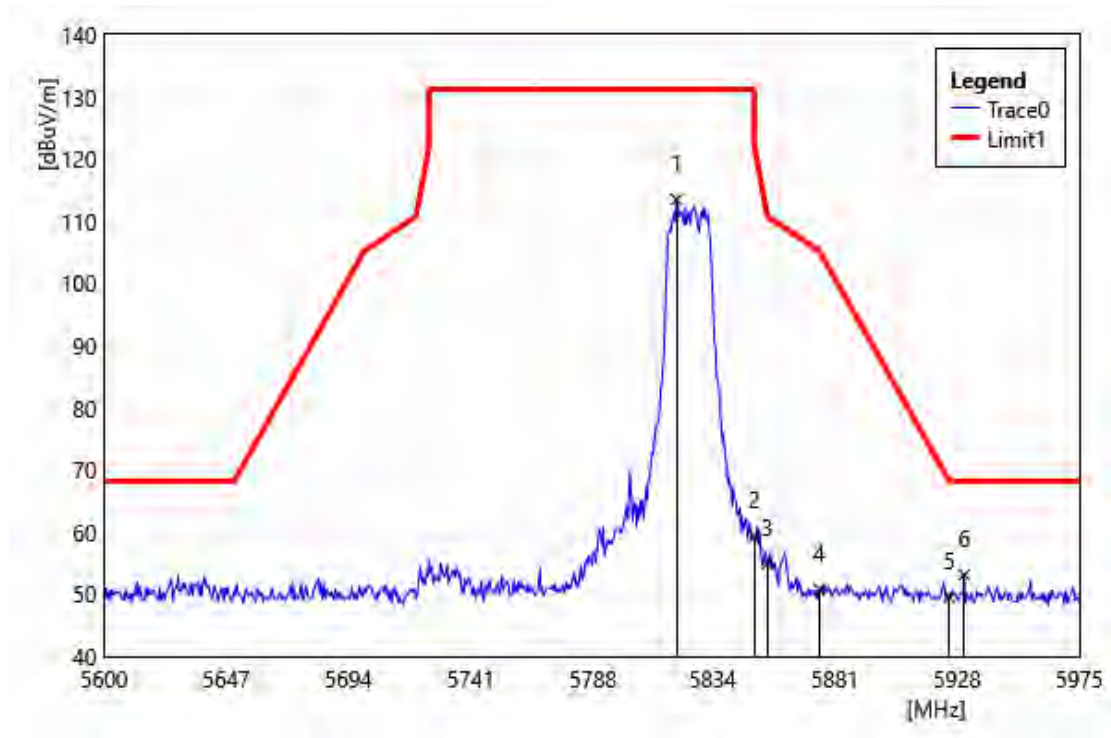


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5820.13	113.29	0.20	113.49	131.20	-17.71	PEAK
2	5850.00	59.04	0.28	59.32	122.20	-62.88	PEAK
3	5855.00	54.63	0.29	54.92	110.80	-55.88	PEAK
4	5875.00	50.47	0.34	50.81	105.20	-54.39	PEAK
5	5925.00	49.28	0.28	49.56	68.20	-18.64	PEAK
6	5930.75	52.87	0.24	53.11	68.20	-15.09	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5825 MHz		
Polarization:	Horizontal		
Remark:			

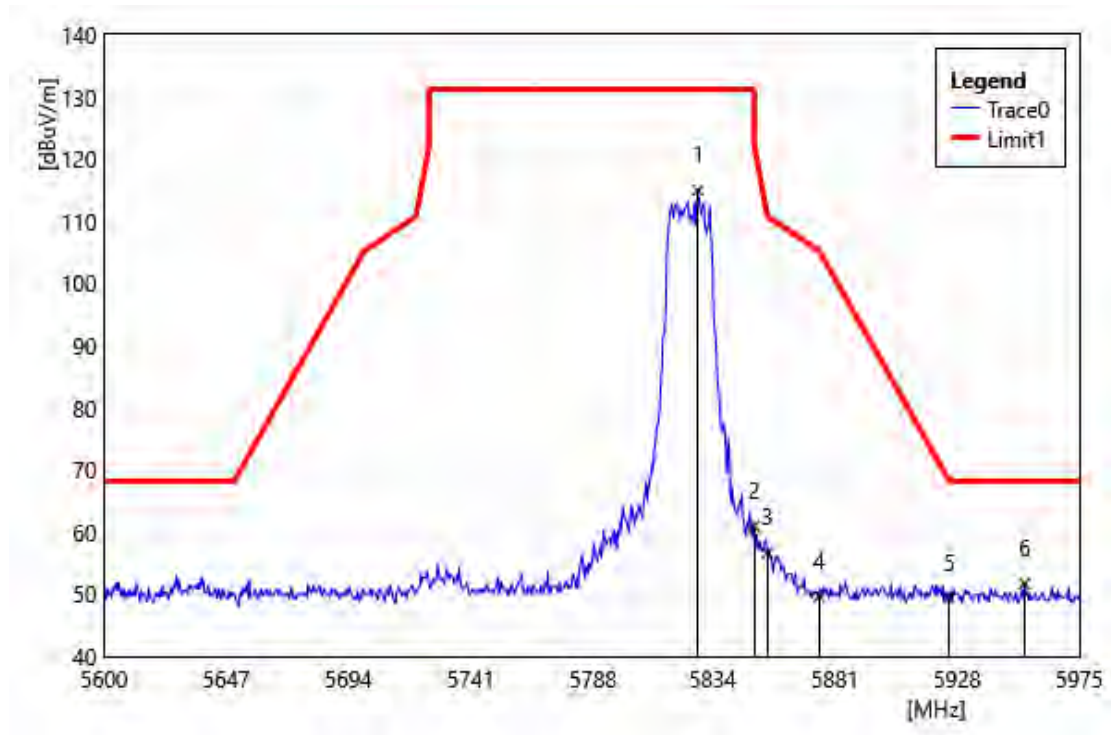


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5828.38	114.75	0.22	114.97	131.20	-16.23	PEAK
2	5850.00	60.63	0.28	60.91	122.20	-61.29	PEAK
3	5855.00	56.37	0.29	56.66	110.80	-54.14	PEAK
4	5875.00	49.32	0.34	49.66	105.20	-55.54	PEAK
5	5925.00	49.19	0.28	49.47	68.20	-18.73	PEAK
6	5954.00	51.52	0.15	51.67	68.20	-16.53	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5180 MHz		
Polarization:	Vertical		
Remark:			

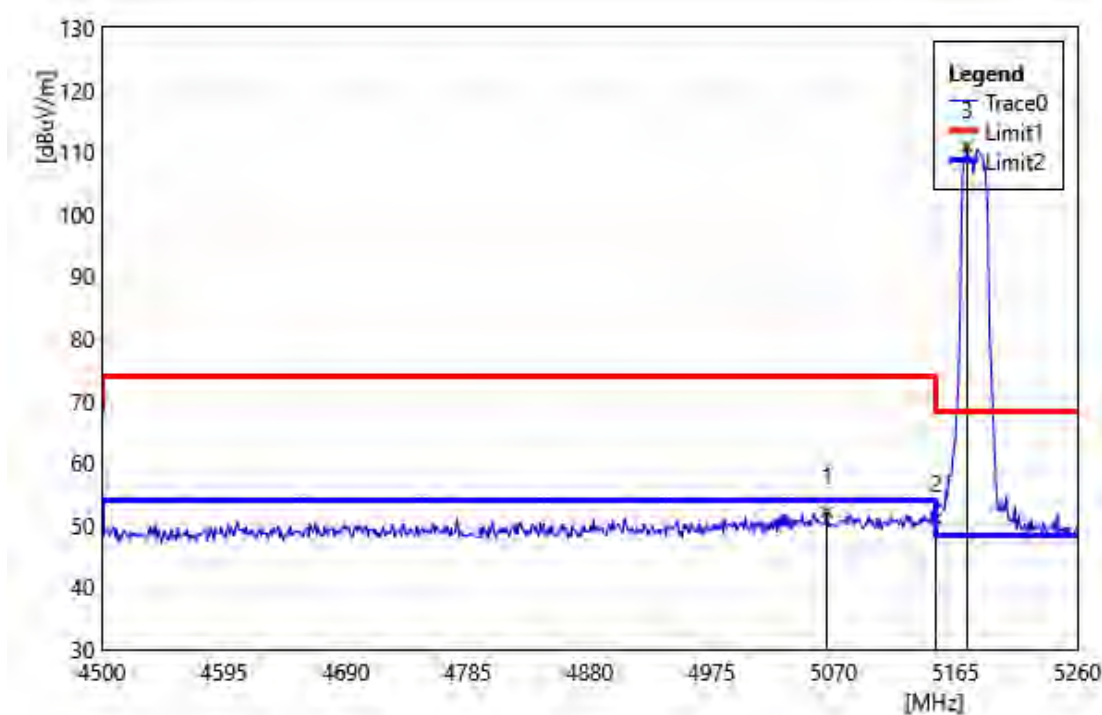


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5064.68	53.19	-1.04	52.15	74.00	-21.85	PEAK
2	5150.00	51.97	-0.91	51.07	74.00	-22.93	PEAK
3	5174.12	111.98	-1.03	110.95	68.20	42.75	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5180 MHz		
Polarization:	Horizontal		
Remark:			

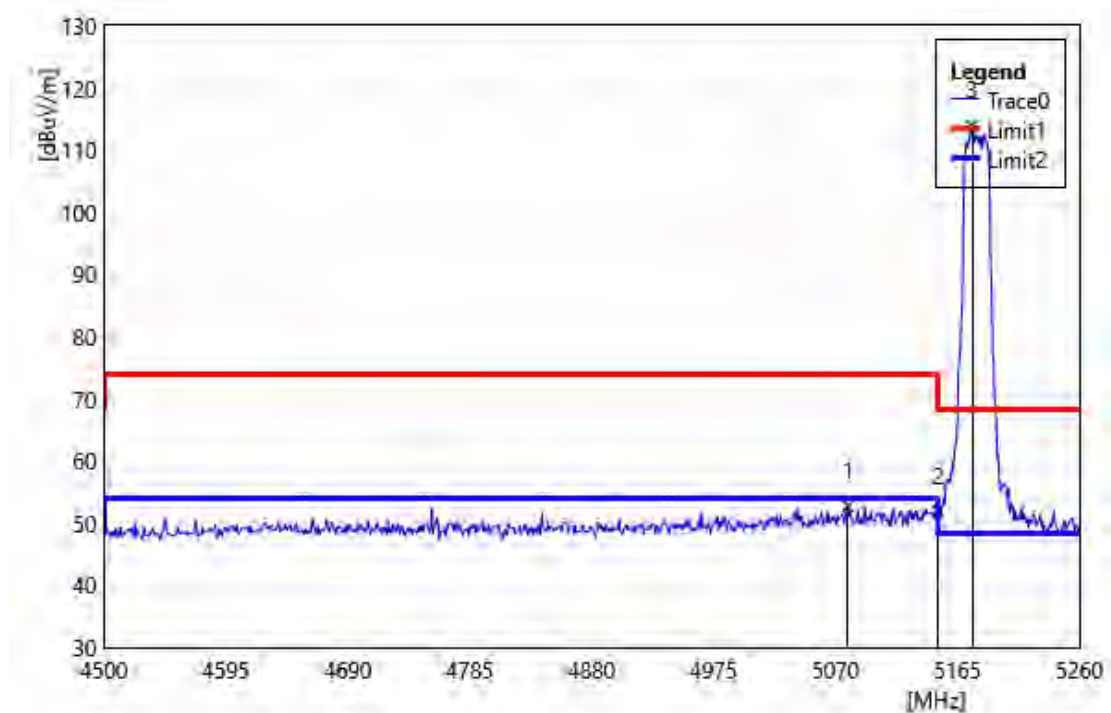


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5079.88	53.71	-0.96	52.75	74.00	-21.25	PEAK
2	5150.00	52.89	-0.91	51.99	74.00	-22.01	PEAK
3	5176.40	114.95	-1.04	113.91	68.20	45.71	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5180 MHz		
Polarization:	Vertical		
Remark:			

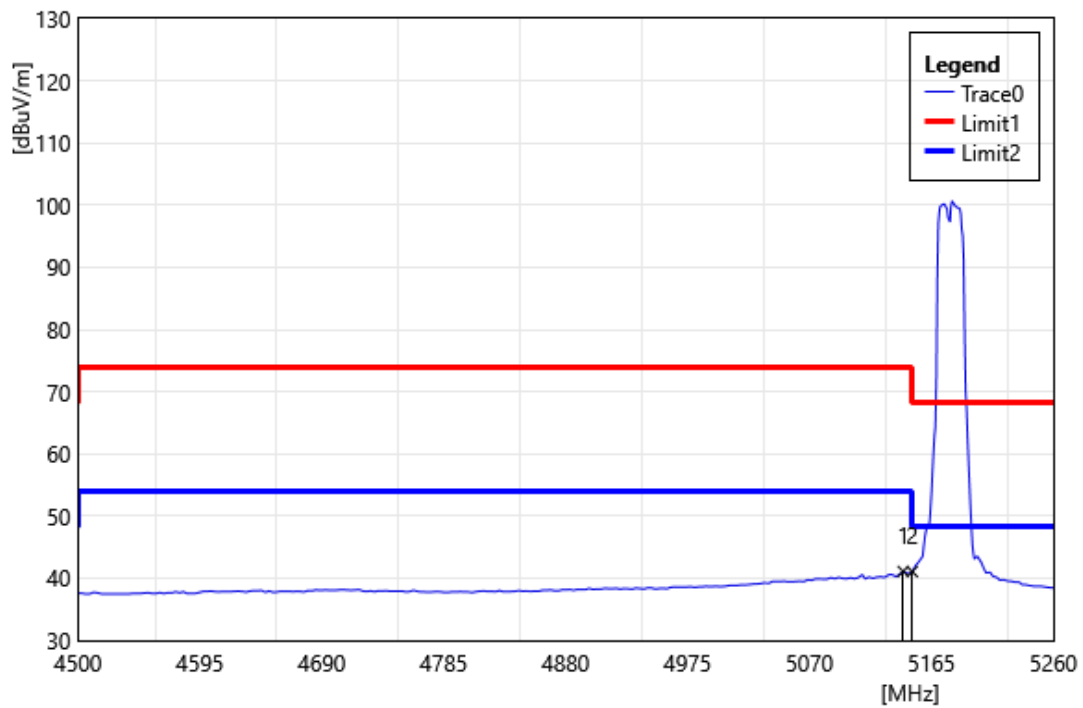


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5142.96	41.99	-0.90	41.09	54.00	-12.91	AVG
2	5150.00	41.99	-0.91	41.08	54.00	-12.92	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5180 MHz		
Polarization:	Horizontal		
Remark:			

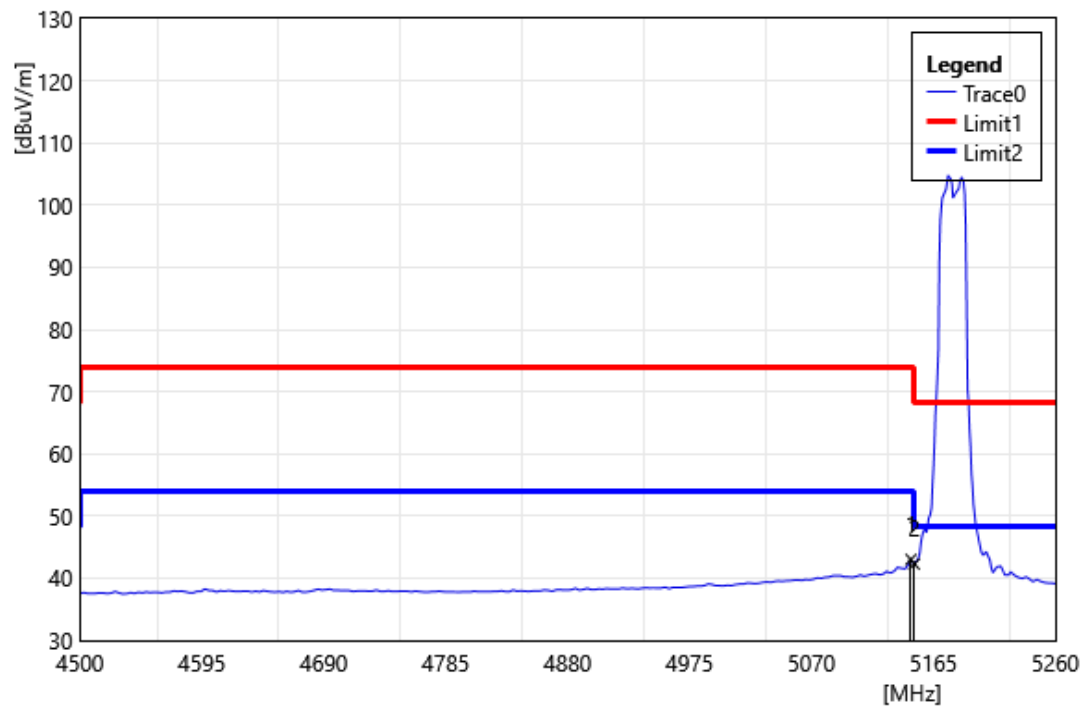


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5147.52	43.93	-0.91	43.02	54.00	-10.98	AVG
2	5150.00	43.19	-0.91	42.28	54.00	-11.72	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5200 MHz		
Polarization:	Vertical		
Remark:			

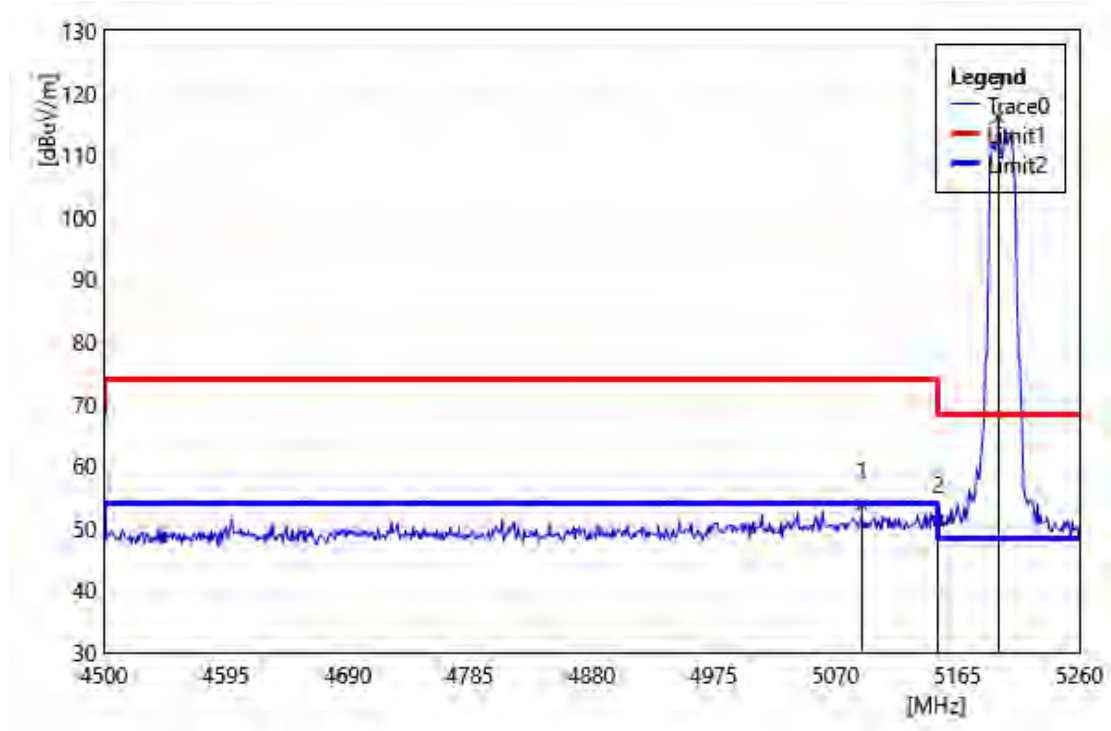


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5090.52	54.61	-0.91	53.70	74.00	-20.30	PEAK
2	5150.00	52.07	-0.91	51.16	74.00	-22.84	PEAK
3	5196.92	117.17	-1.14	116.03	68.20	47.83	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5200 MHz		
Polarization:	Horizontal		
Remark:			

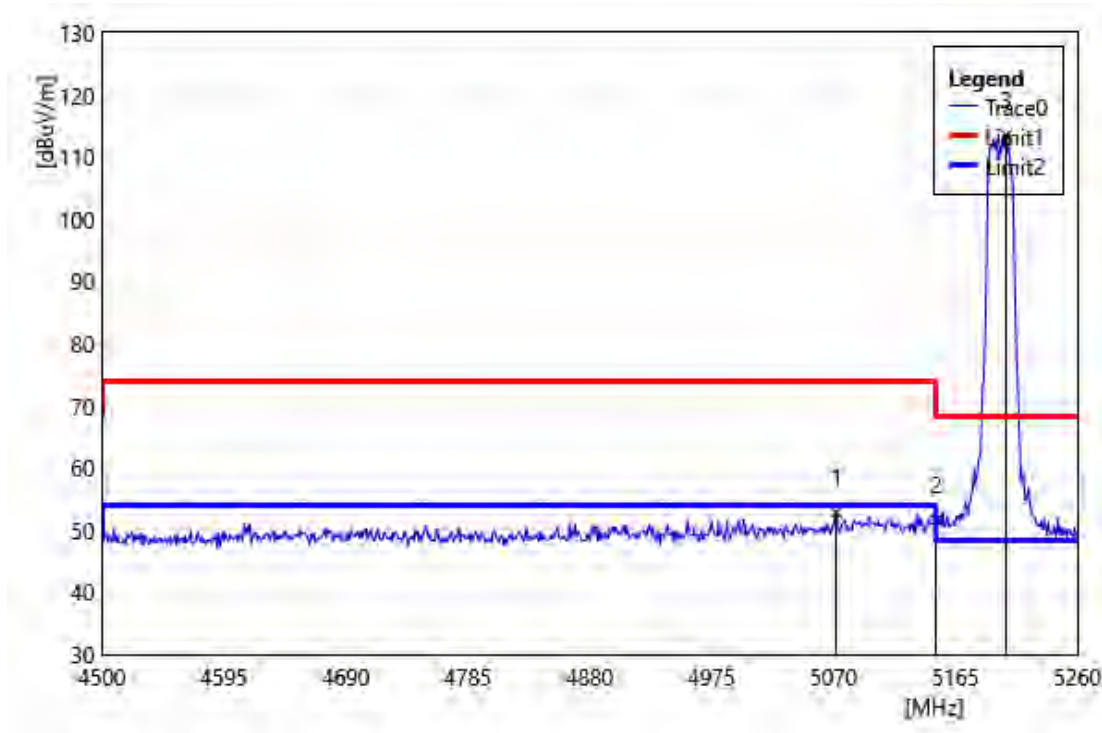


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5072.28	53.85	-1.00	52.85	74.00	-21.15	PEAK
2	5150.00	52.55	-0.91	51.64	74.00	-22.36	PEAK
3	5204.52	114.63	-1.19	113.44	68.20	45.24	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5200 MHz		
Polarization:	Vertical		
Remark:			

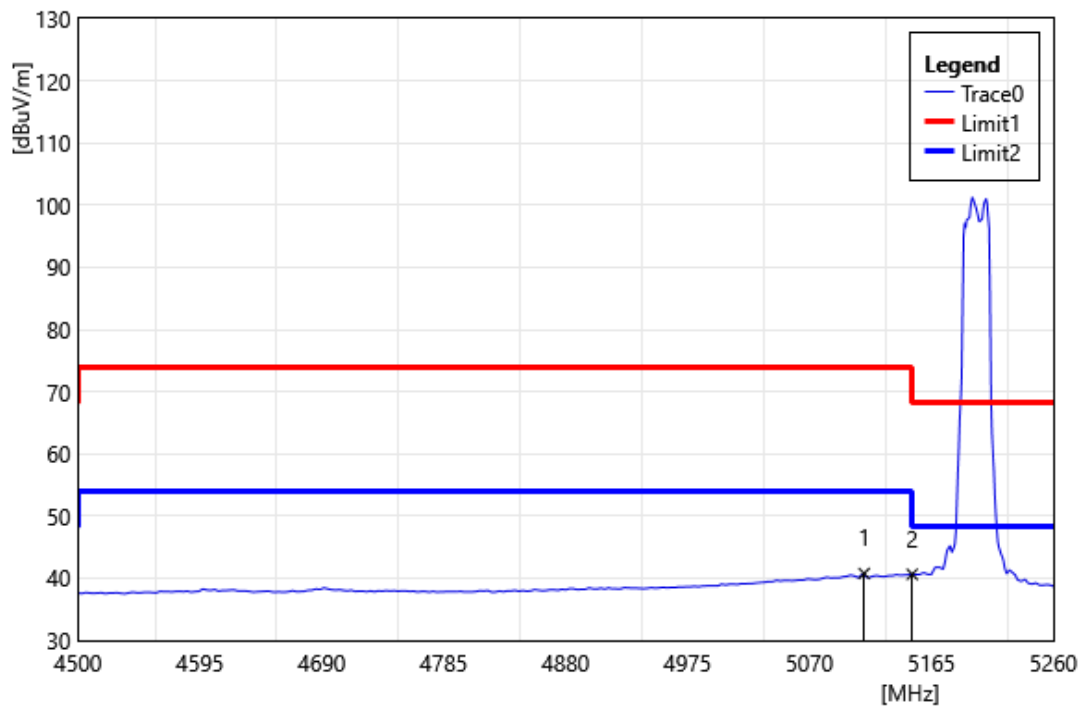


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5112.56	41.63	-0.87	40.76	54.00	-13.24	AVG
2	5150.00	41.54	-0.91	40.63	54.00	-13.37	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5200 MHz		
Polarization:	Horizontal		
Remark:			

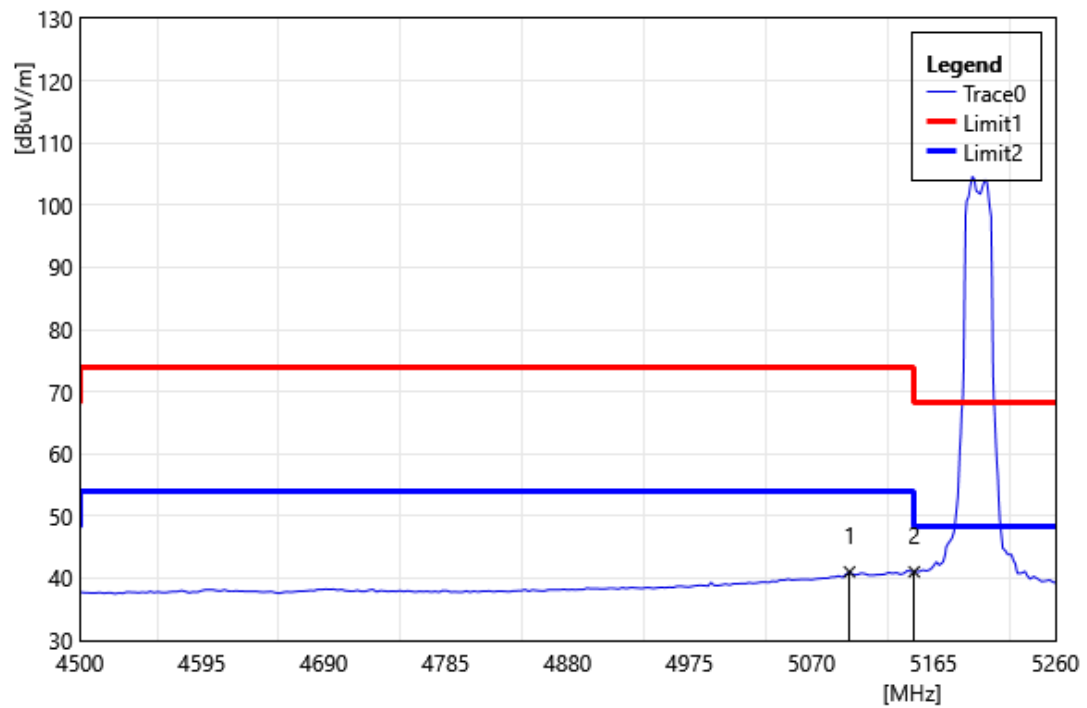


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5099.64	41.88	-0.86	41.02	54.00	-12.98	AVG
2	5150.00	41.93	-0.91	41.02	54.00	-12.98	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5240 MHz		
Polarization:	Vertical		
Remark:			

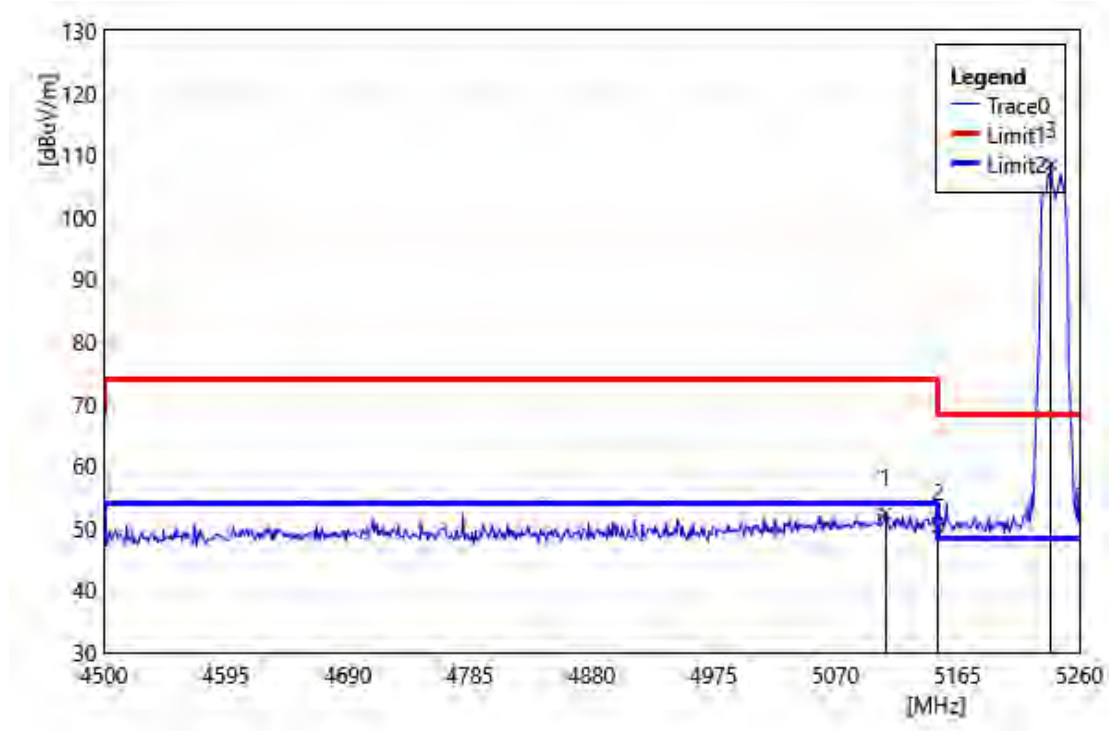


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5108.76	53.23	-0.87	52.36	74.00	-21.64	PEAK
2	5150.00	51.09	-0.91	50.18	74.00	-23.82	PEAK
3	5237.96	109.90	-1.42	108.48	68.20	40.28	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5240 MHz		
Polarization:	Horizontal		
Remark:			

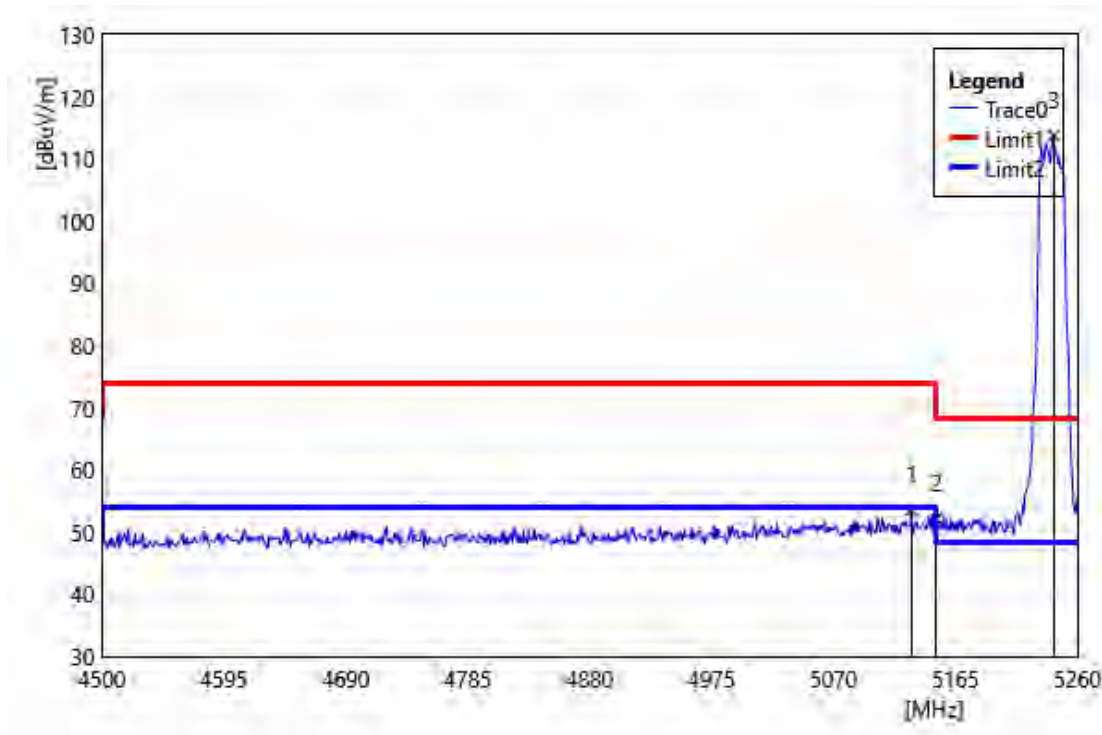


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5130.80	54.40	-0.89	53.51	74.00	-20.50	PEAK
2	5150.00	53.00	-0.91	52.09	74.00	-21.91	PEAK
3	5241.76	115.20	-1.44	113.76	68.20	45.56	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5240 MHz		
Polarization:	Vertical		
Remark:			

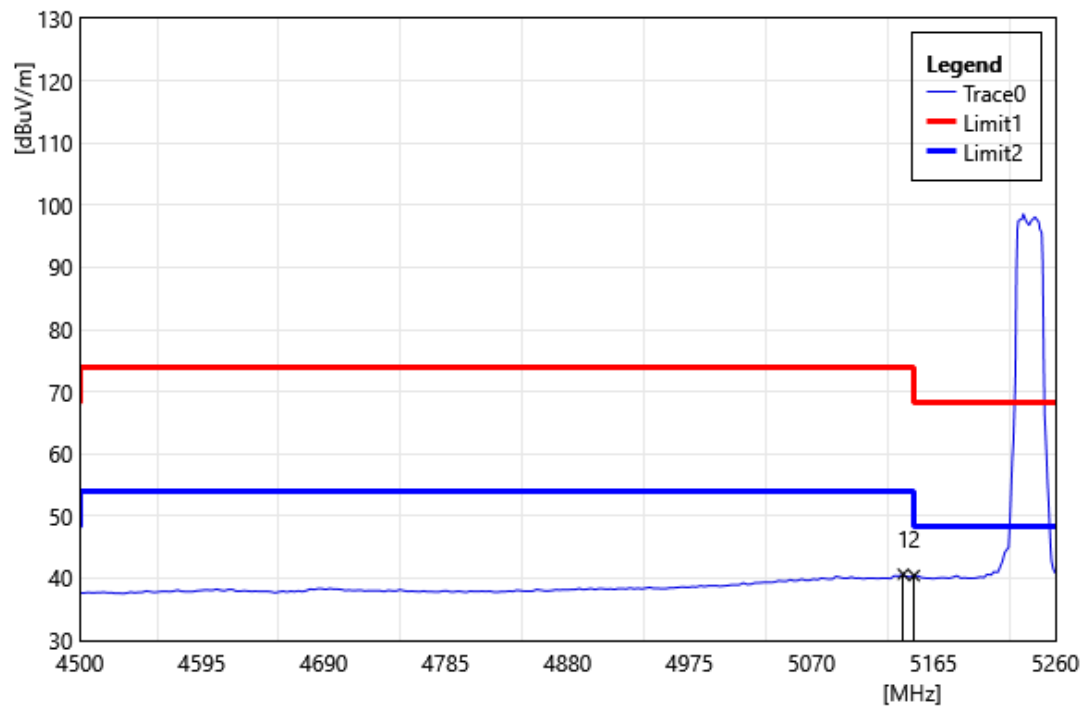


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5141.44	41.55	-0.90	40.65	54.00	-13.35	AVG
2	5150.00	41.32	-0.91	40.42	54.00	-13.58	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5240 MHz		
Polarization:	Horizontal		
Remark:			

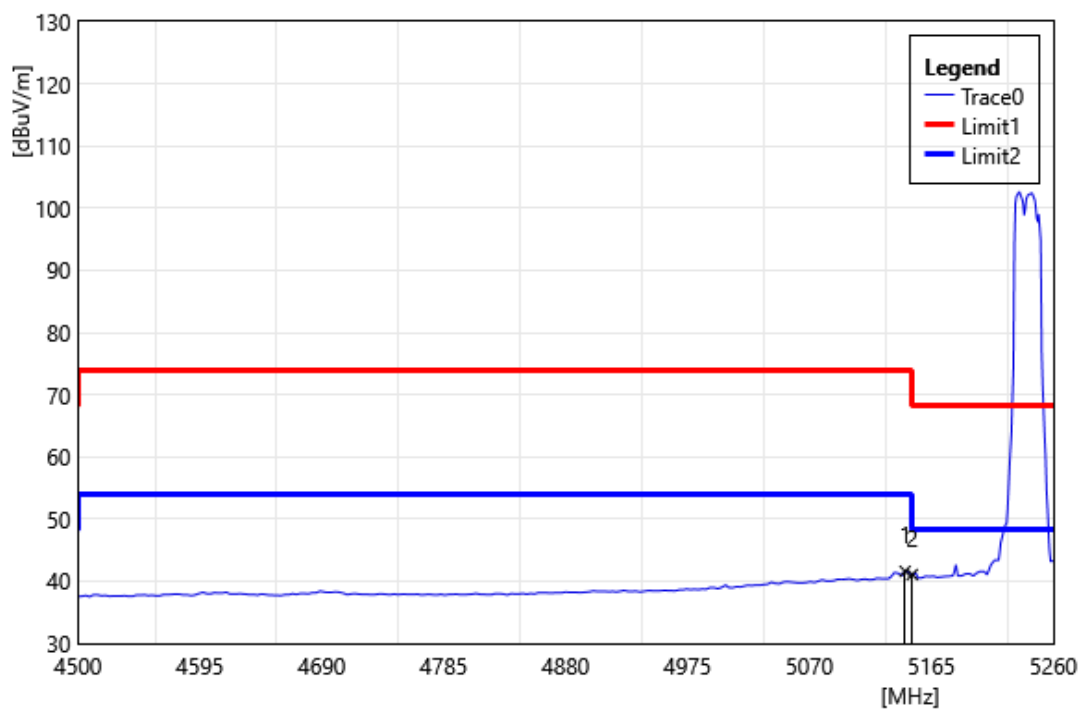


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5144.48	42.50	-0.90	41.60	54.00	-12.40	AVG
2	5150.00	41.98	-0.91	41.07	54.00	-12.93	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5260 MHz		
Polarization:	Vertical		
Remark:			

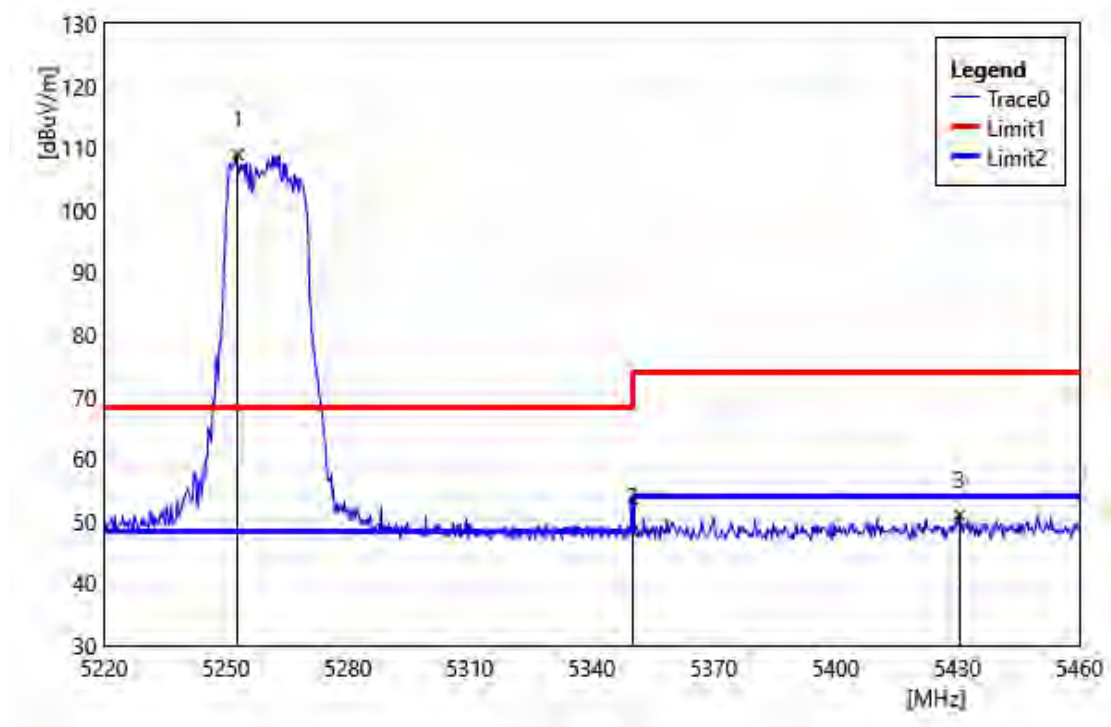


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5252.88	110.44	-1.51	108.93	68.20	40.73	PEAK
2	5350.00	49.66	-1.29	48.37	74.00	-25.63	PEAK
3	5430.48	51.75	-0.72	51.03	74.00	-22.97	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5260 MHz		
Polarization:	Horizontal		
Remark:			

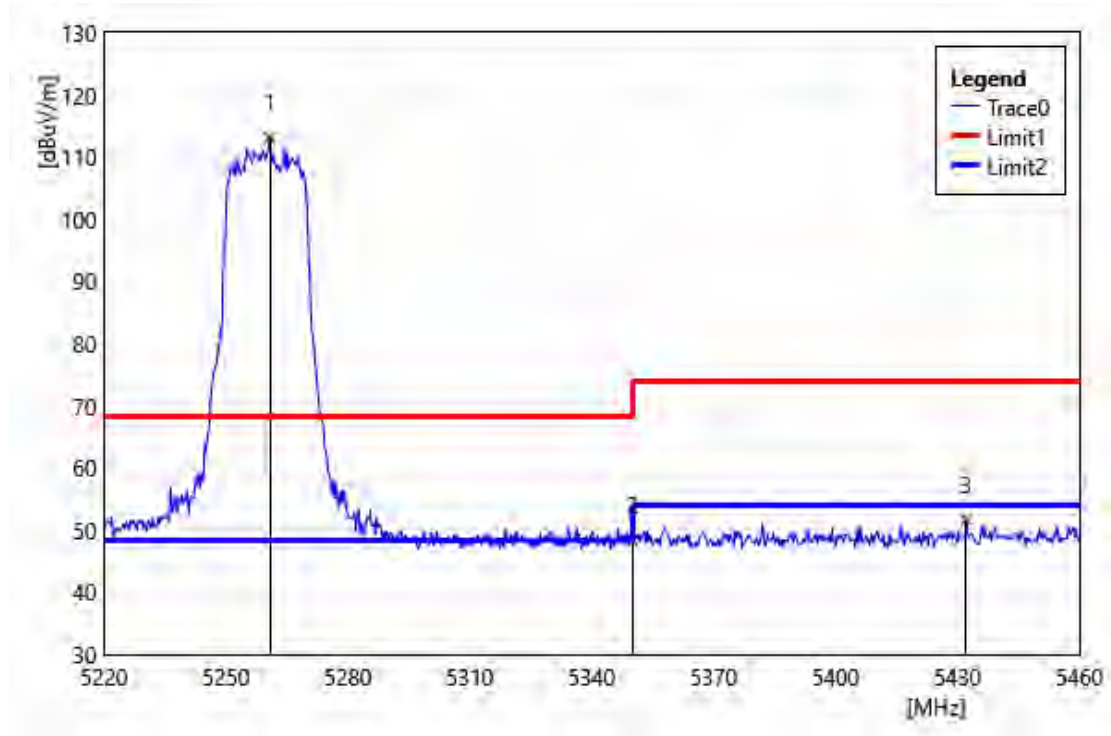


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5260.80	114.59	-1.53	113.06	68.20	44.86	PEAK
2	5350.00	49.56	-1.29	48.27	74.00	-25.73	PEAK
3	5432.16	52.37	-0.71	51.66	74.00	-22.34	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5260 MHz		
Polarization:	Vertical		
Remark:			

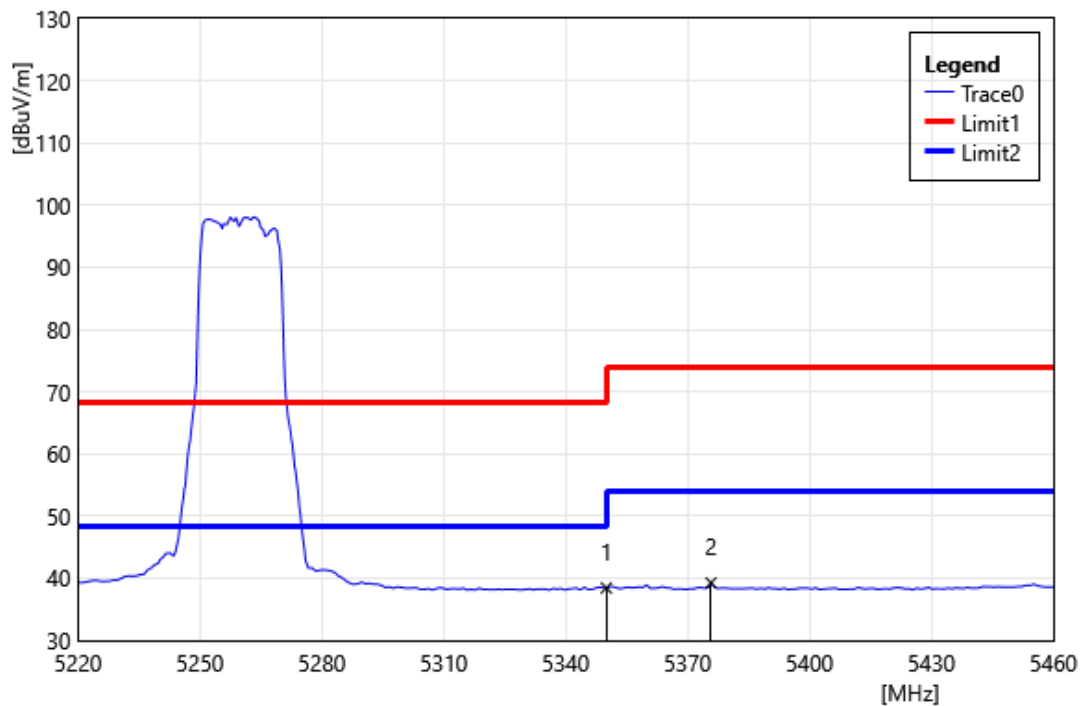


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	39.73	-1.29	38.44	54.00	-15.56	AVG
2	5375.76	40.36	-1.11	39.25	54.00	-14.75	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5260 MHz		
Polarization:	Horizontal		
Remark:			

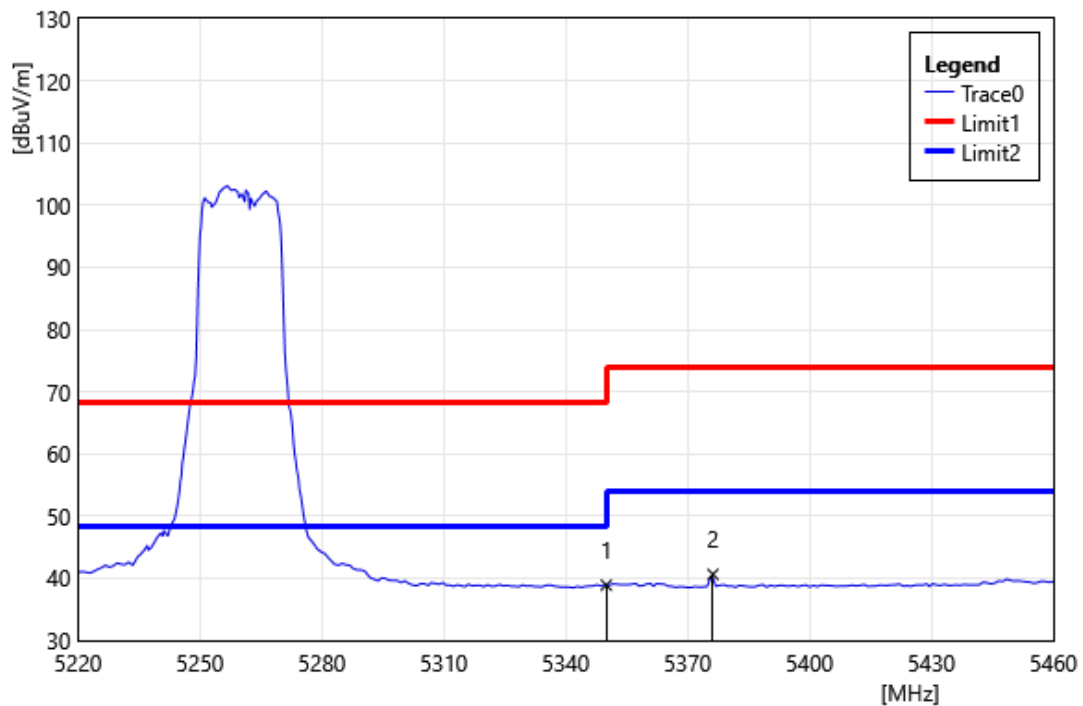


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	40.18	-1.29	38.89	54.00	-15.11	AVG
2	5376.24	41.73	-1.11	40.62	54.00	-13.38	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5280 MHz		
Polarization:	Vertical		
Remark:			

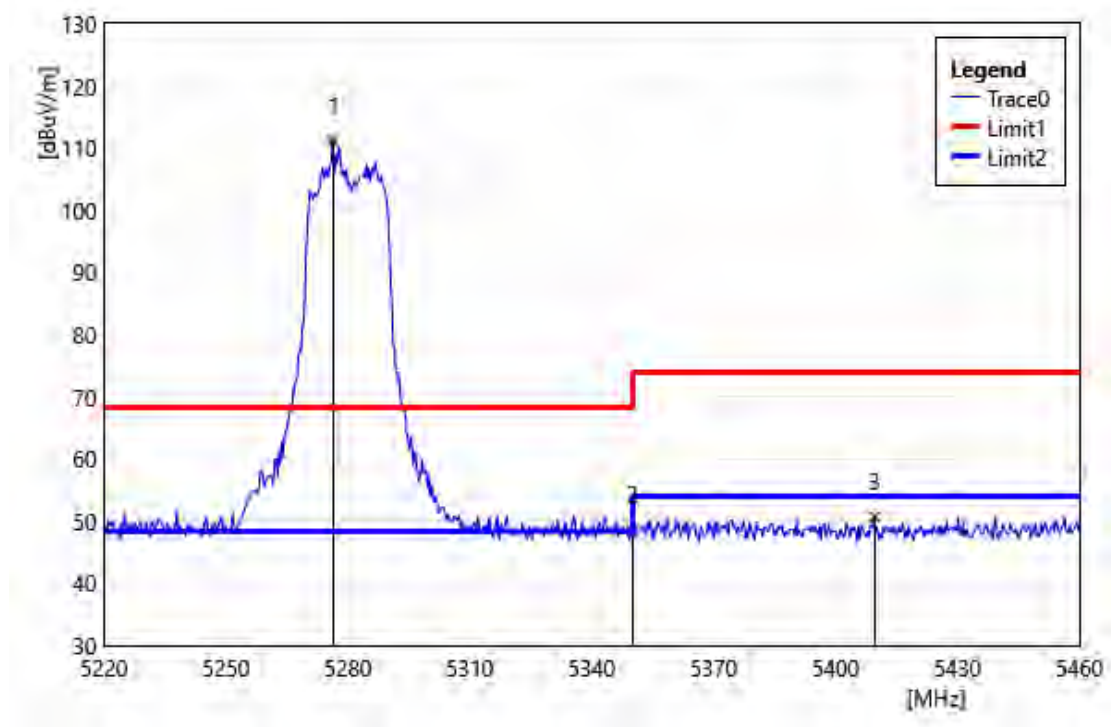


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5276.40	112.76	-1.58	111.18	68.20	42.98	PEAK
2	5350.00	49.79	-1.29	48.50	74.00	-25.50	PEAK
3	5409.60	51.52	-0.87	50.65	74.00	-23.35	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5280 MHz		
Polarization:	Horizontal		
Remark:			

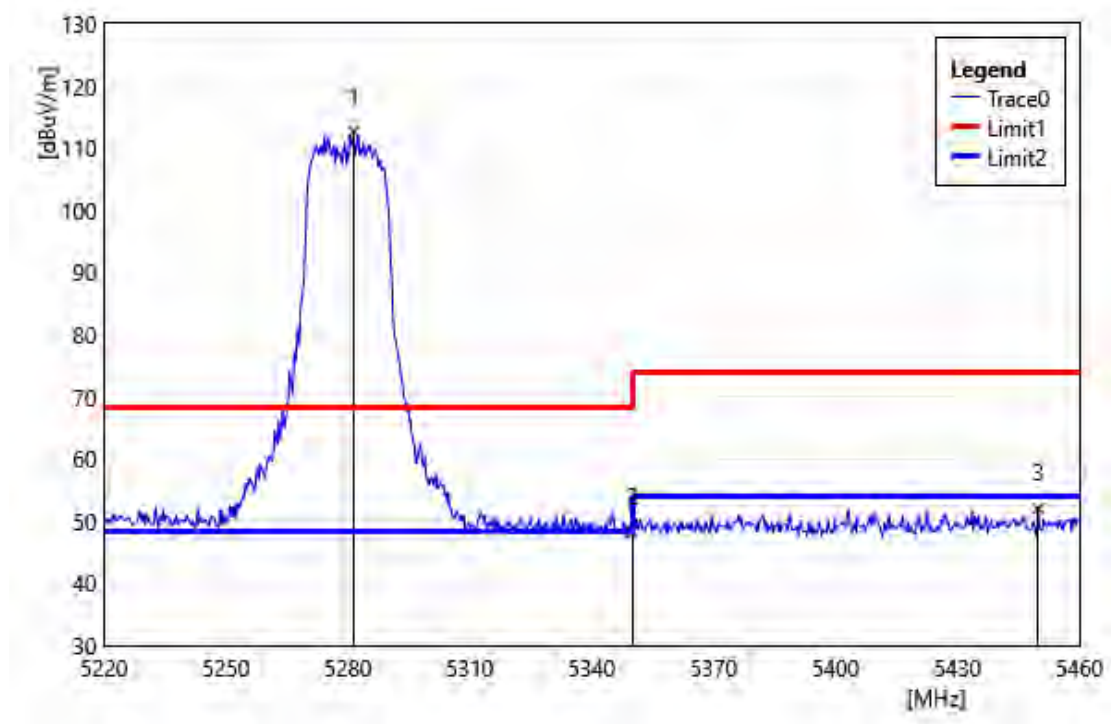


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5281.44	114.22	-1.59	112.63	68.20	44.43	PEAK
2	5350.00	49.48	-1.29	48.18	74.00	-25.82	PEAK
3	5449.92	52.64	-0.58	52.06	74.00	-21.95	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5280 MHz		
Polarization:	Vertical		
Remark:			

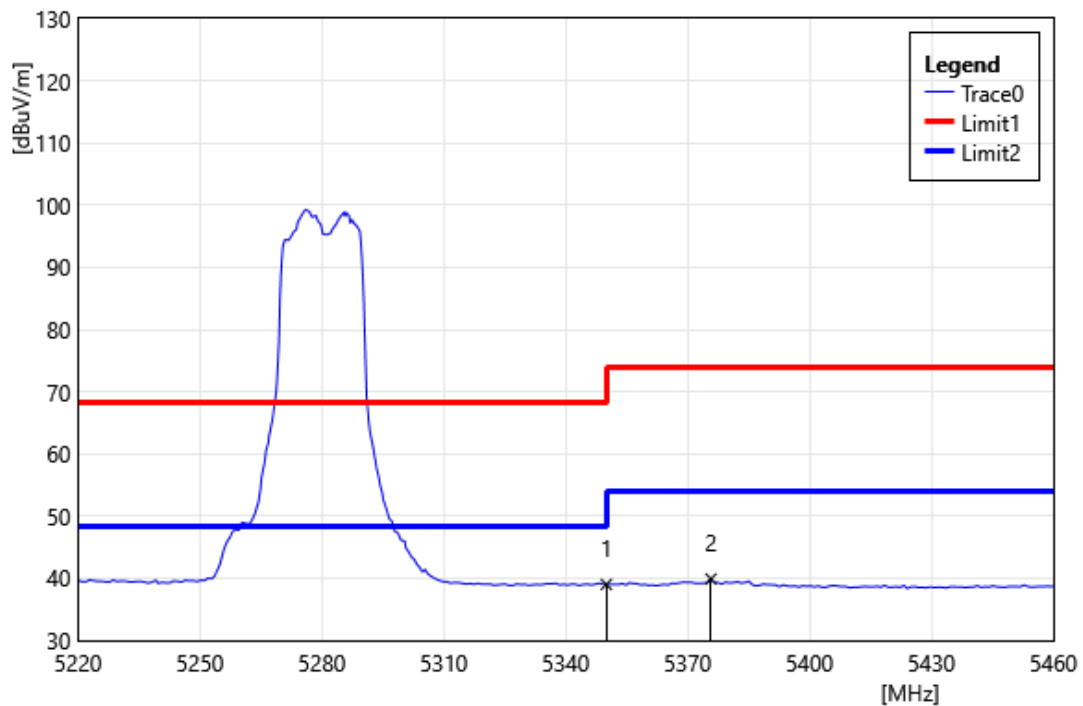


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	40.30	-1.29	39.00	54.00	-15.00	AVG
2	5375.76	41.00	-1.11	39.89	54.00	-14.11	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5280 MHz		
Polarization:	Horizontal		
Remark:			

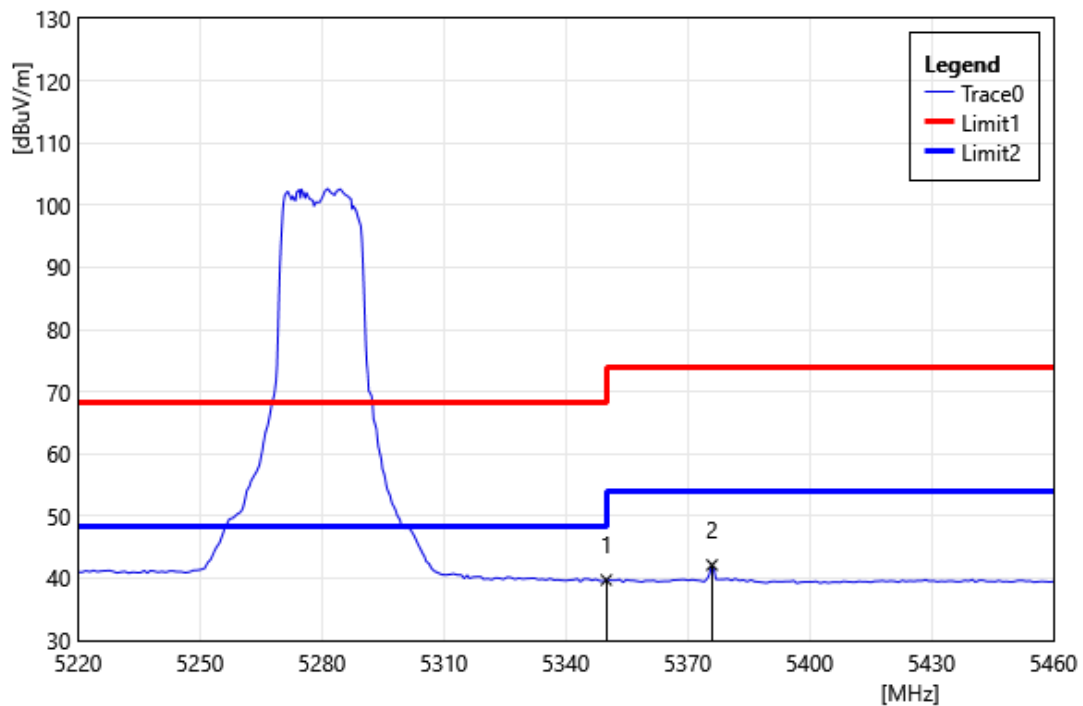


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	41.01	-1.29	39.72	54.00	-14.28	AVG
2	5376.00	43.24	-1.11	42.13	54.00	-11.87	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5320 MHz		
Polarization:	Vertical		
Remark:			

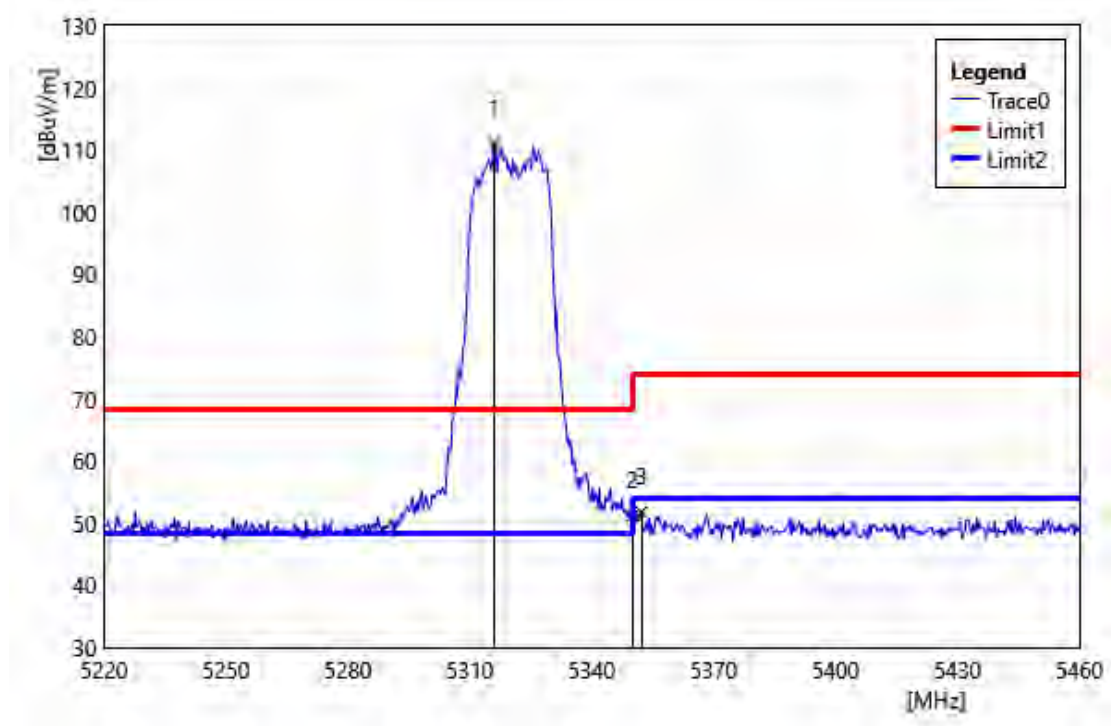


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5316.00	112.67	-1.53	111.14	68.20	42.94	PEAK
2	5350.00	52.43	-1.29	51.14	74.00	-22.86	PEAK
3	5352.24	53.03	-1.28	51.75	74.00	-22.25	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5320 MHz		
Polarization:	Horizontal		
Remark:			

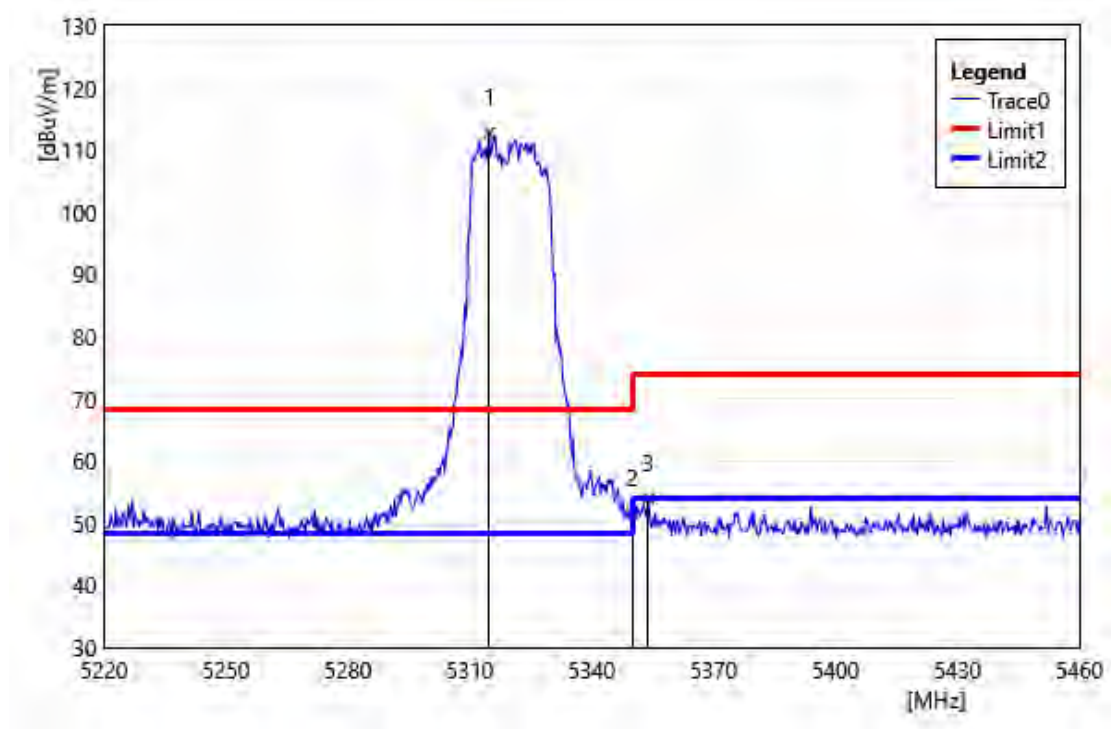


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5314.80	114.33	-1.54	112.79	68.20	44.59	PEAK
2	5350.00	52.92	-1.29	51.63	74.00	-22.37	PEAK
3	5353.92	55.25	-1.26	53.99	74.00	-20.01	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5320 MHz		
Polarization:	Vertical		
Remark:			

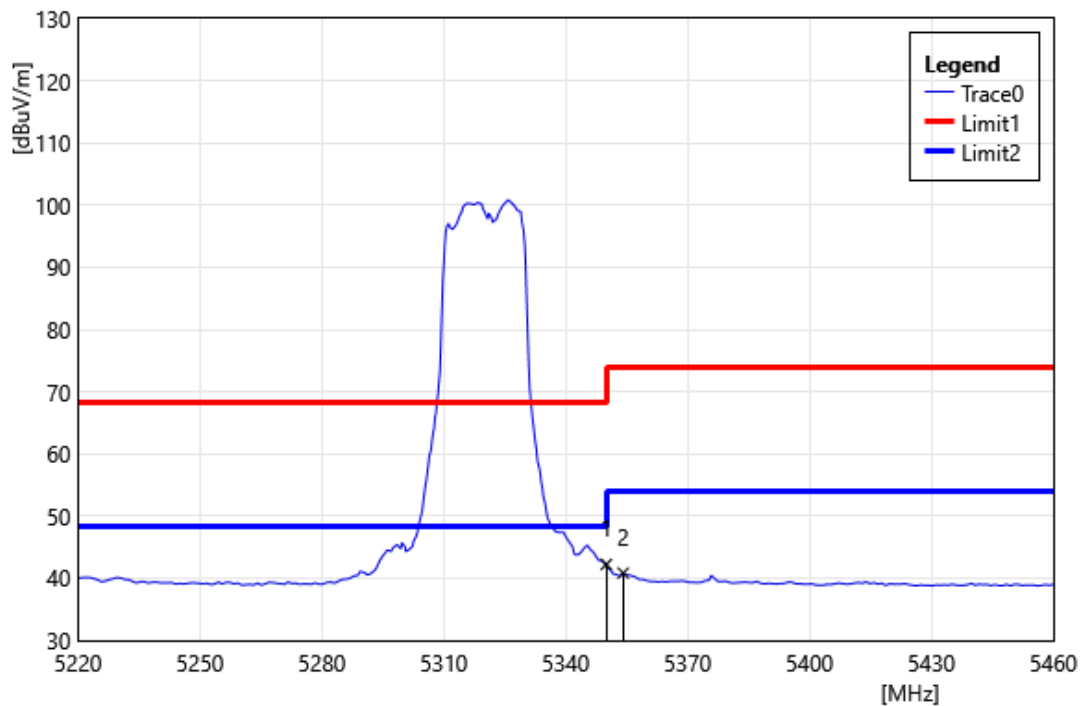


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	43.52	-1.29	42.22	54.00	-11.78	AVG
2	5354.16	42.10	-1.26	40.84	54.00	-13.16	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5320 MHz		
Polarization:	Horizontal		
Remark:			

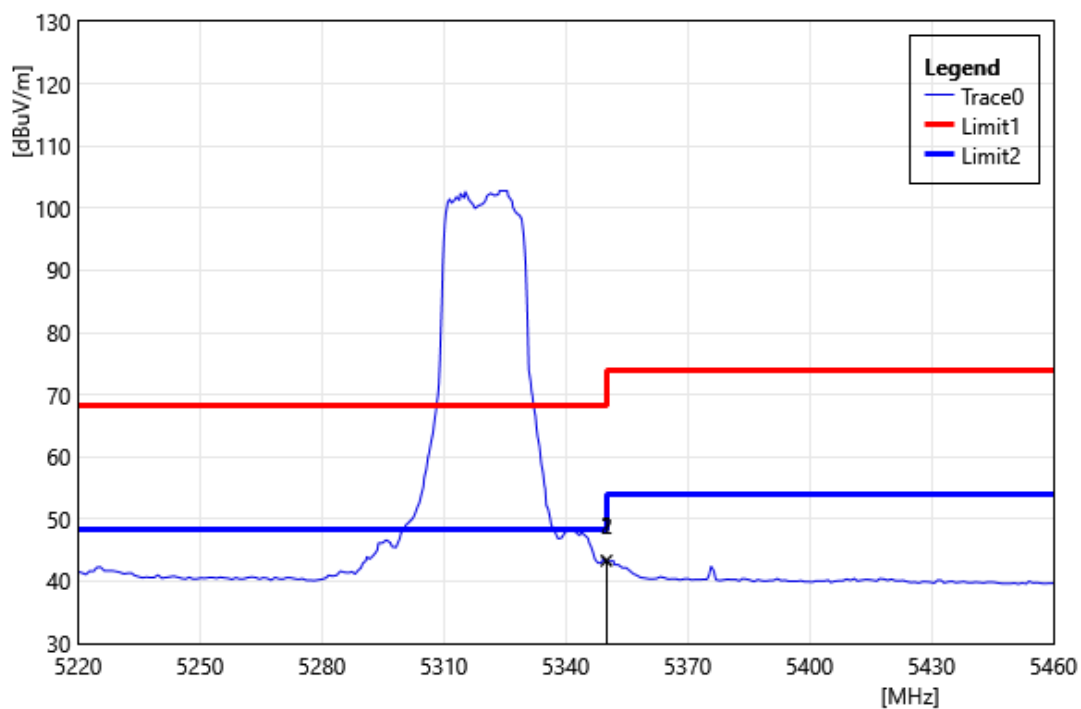


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	44.54	-1.29	43.25	54.00	-10.75	AVG
2	5350.08	44.65	-1.29	43.36	54.00	-10.64	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5500 MHz		
Polarization:	Vertical		
Remark:			

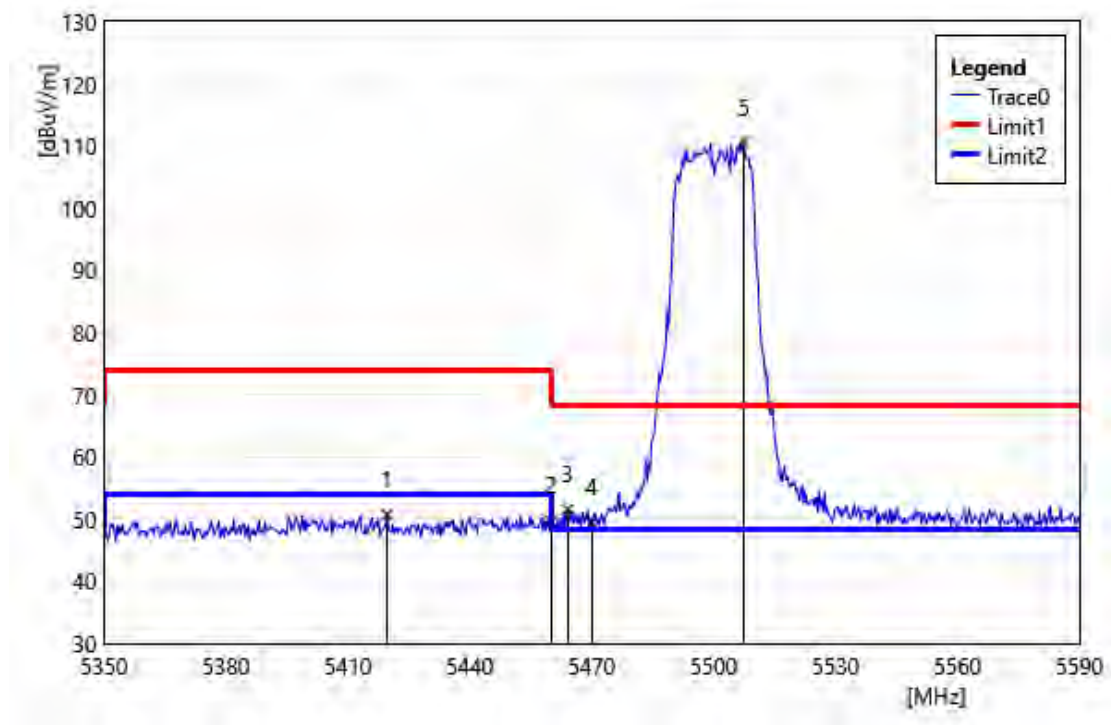


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5419.60	51.53	-0.80	50.73	74.00	-23.27	PEAK
2	5460.00	50.20	-0.57	49.63	74.00	-24.37	PEAK
3	5464.00	52.07	-0.57	51.50	68.20	-16.70	PEAK
4	5470.00	49.98	-0.56	49.42	68.20	-18.78	PEAK
5	5507.44	111.14	-0.53	110.61	68.20	42.41	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5500 MHz		
Polarization:	Horizontal		
Remark:			

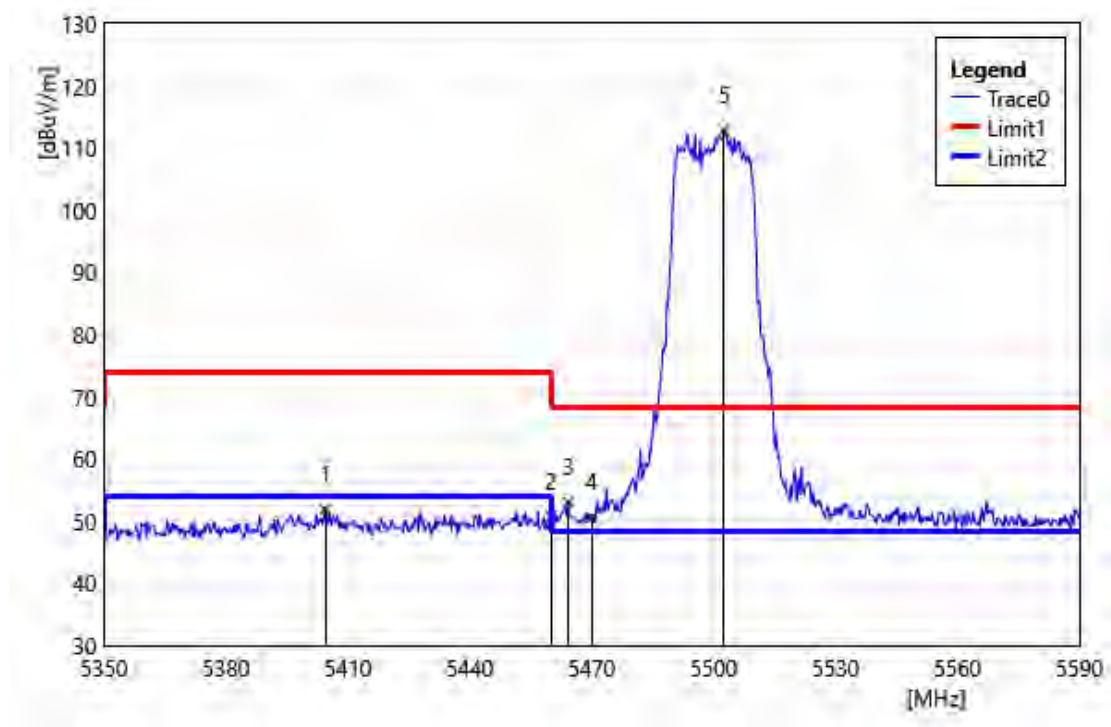


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5404.48	52.79	-0.91	51.88	74.00	-22.12	PEAK
2	5460.00	51.32	-0.57	50.75	74.00	-23.25	PEAK
3	5464.24	53.62	-0.57	53.05	68.20	-15.15	PEAK
4	5470.00	51.07	-0.56	50.51	68.20	-17.69	PEAK
5	5502.64	113.42	-0.53	112.89	68.20	44.69	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5500 MHz		
Polarization:	Vertical		
Remark:			

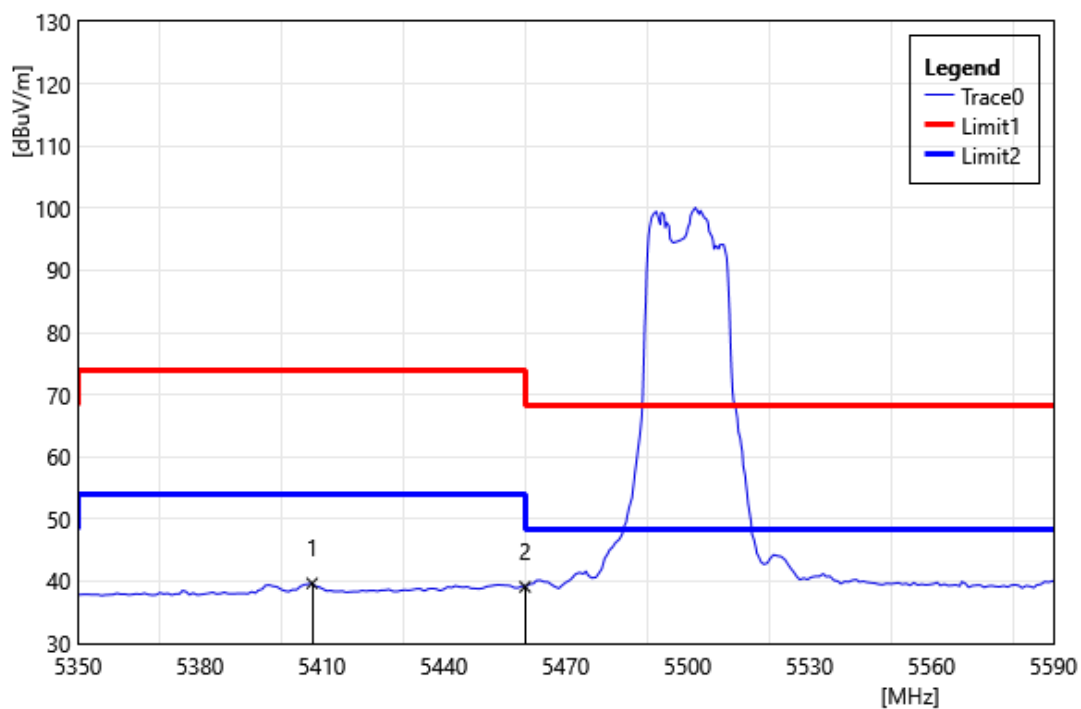


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5407.60	40.55	-0.88	39.67	54.00	-14.33	AVG
2	5460.00	39.67	-0.57	39.10	54.00	-14.90	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5500 MHz		
Polarization:	Horizontal		
Remark:			

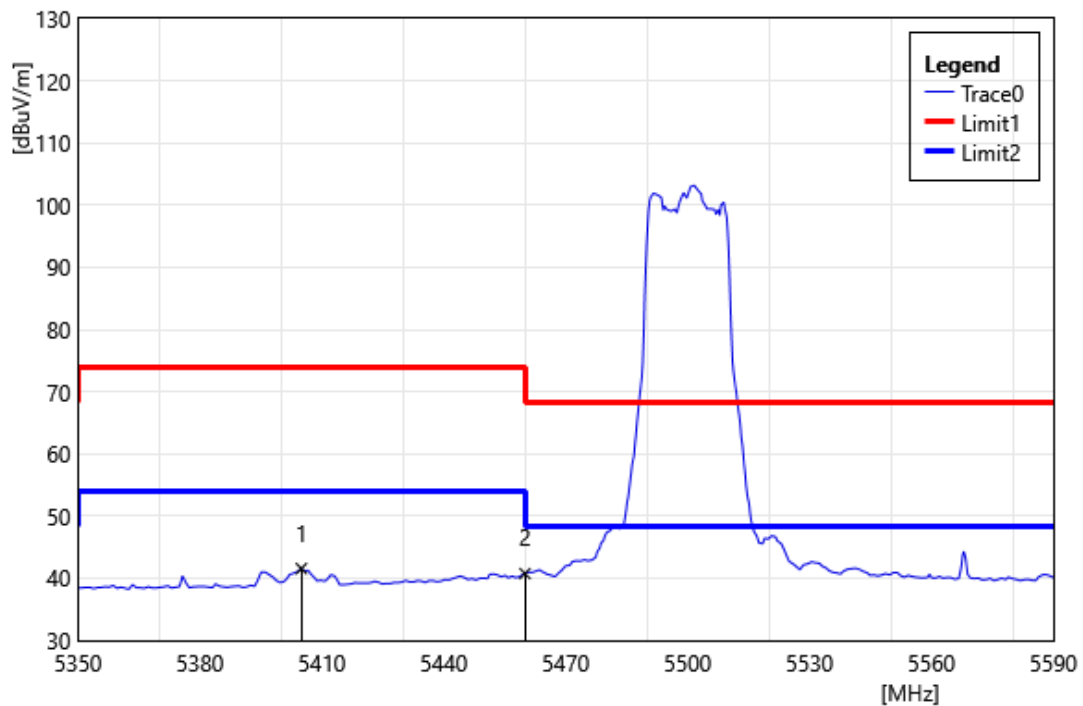


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5404.96	42.45	-0.90	41.55	54.00	-12.45	AVG
2	5460.00	41.32	-0.57	40.75	54.00	-13.25	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5560 MHz		
Polarization:	Vertical		
Remark:			

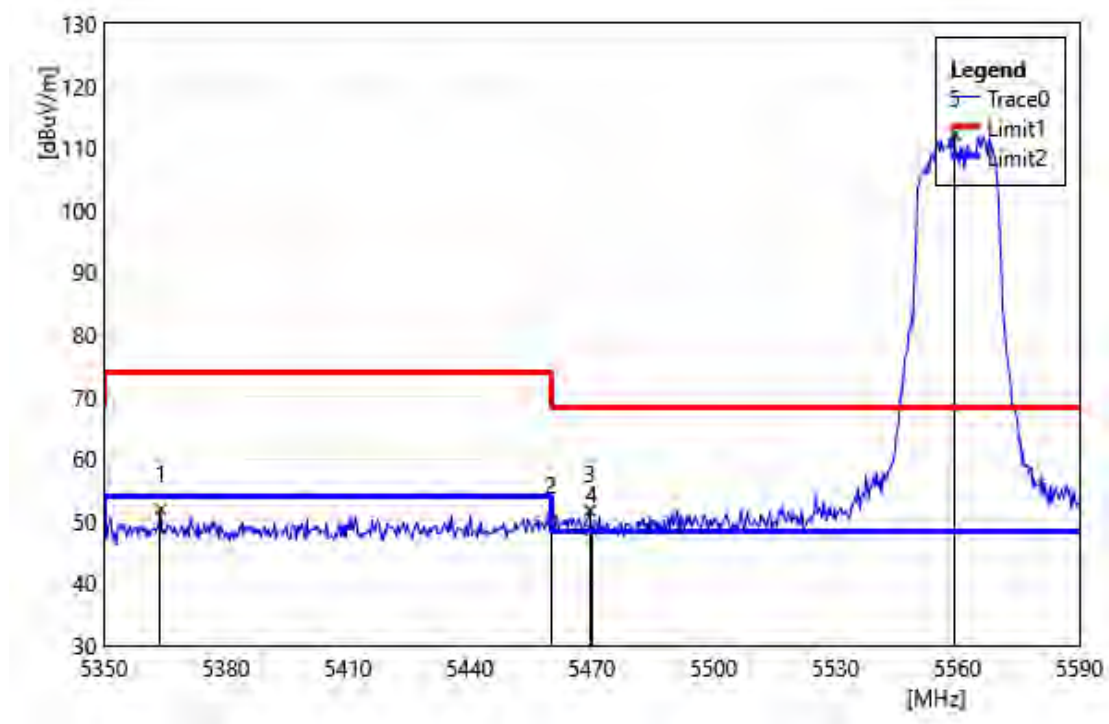


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5363.92	53.11	-1.19	51.92	74.00	-22.08	PEAK
2	5460.00	50.69	-0.57	50.12	74.00	-23.88	PEAK
3	5469.52	52.29	-0.56	51.73	68.20	-16.47	PEAK
4	5470.00	49.16	-0.56	48.60	68.20	-19.60	PEAK
5	5559.28	112.70	-0.51	112.19	68.20	43.99	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5560 MHz		
Polarization:	Horizontal		
Remark:			

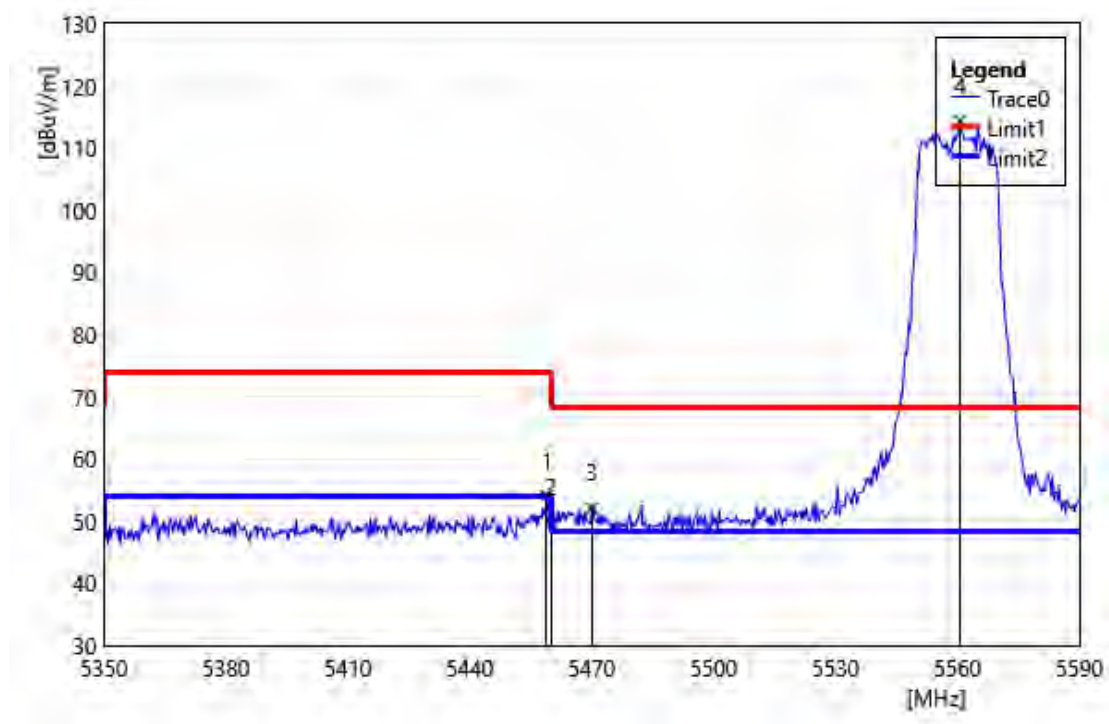


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.96	54.63	-0.57	54.06	74.00	-19.94	PEAK
2	5460.00	50.25	-0.57	49.68	74.00	-24.32	PEAK
3	5470.00	52.69	-0.56	52.13	68.20	-16.07	PEAK
4	5560.72	114.90	-0.52	114.38	68.20	46.18	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5560 MHz		
Polarization:	Vertical		
Remark:			

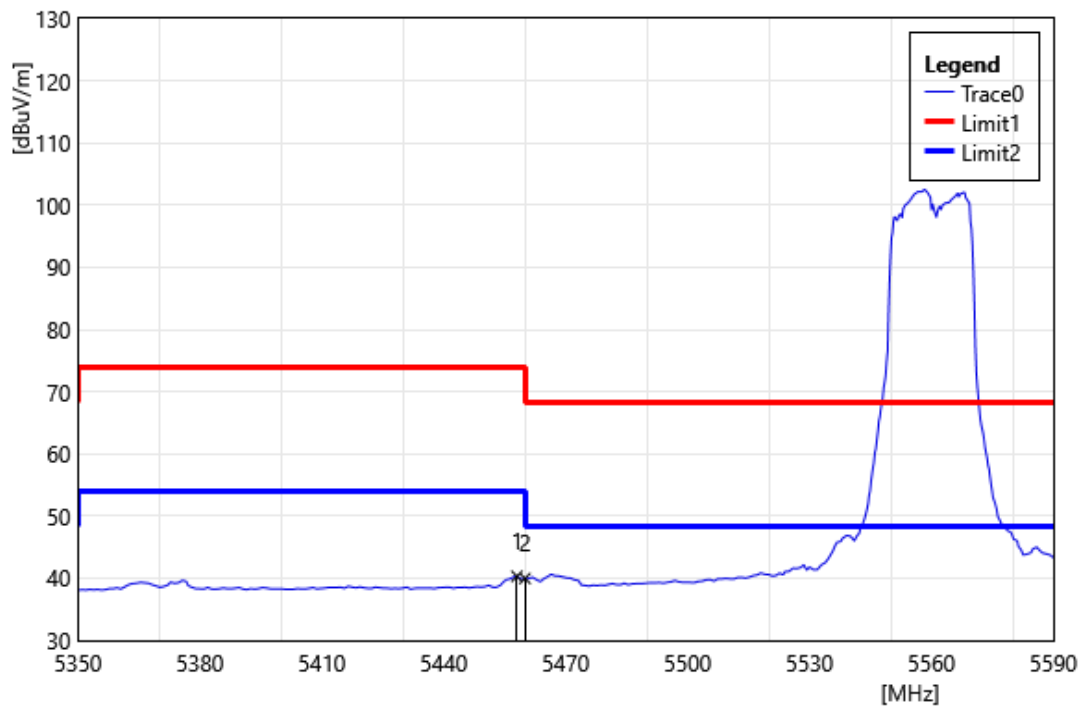


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.00	40.89	-0.58	40.31	54.00	-13.69	AVG
2	5460.00	40.53	-0.57	39.96	54.00	-14.04	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5560 MHz		
Polarization:	Horizontal		
Remark:			

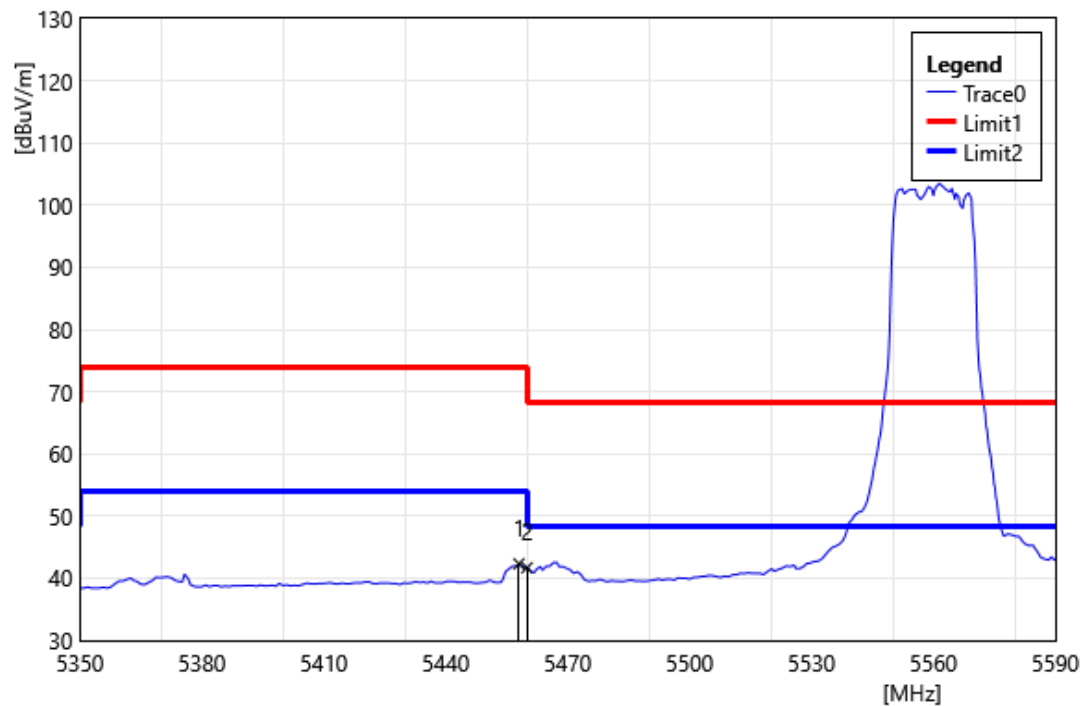


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.00	42.90	-0.58	42.32	54.00	-11.68	AVG
2	5460.00	42.27	-0.57	41.70	54.00	-12.30	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5700 MHz		
Polarization:	Vertical		
Remark:			

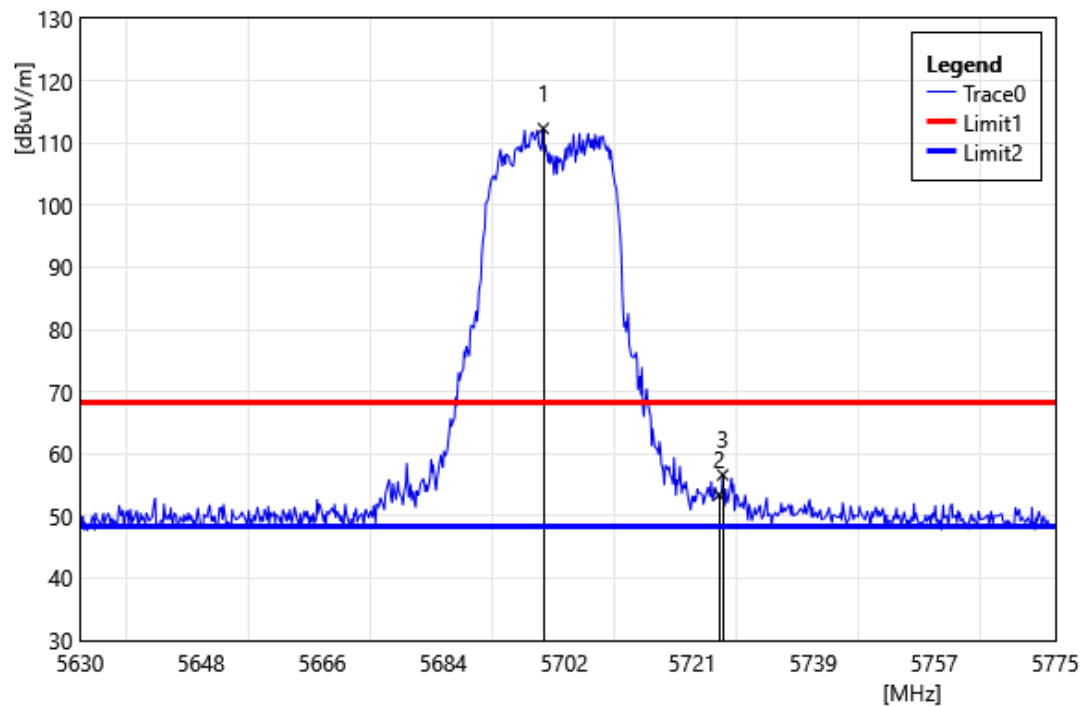


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5698.88	112.94	-0.61	112.33	68.20	44.13	PEAK
2	5725.00	53.75	-0.34	53.41	68.20	-14.79	PEAK
3	5725.56	56.97	-0.34	56.63	68.20	-11.57	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5700 MHz		
Polarization:	Horizontal		
Remark:			

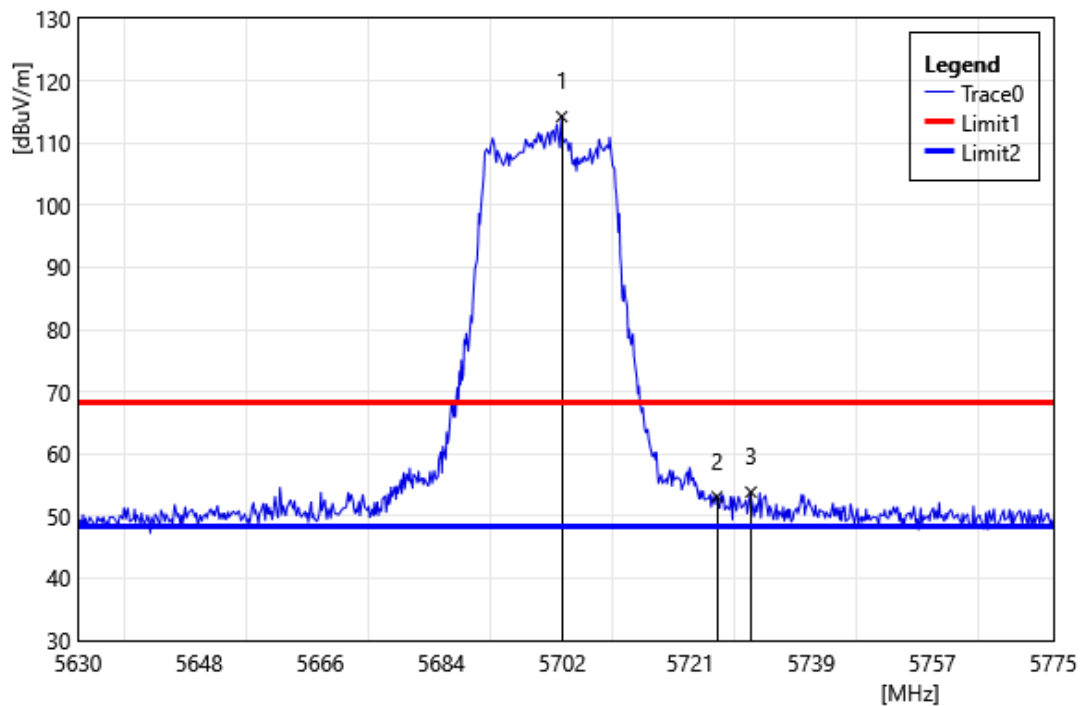


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5701.92	114.82	-0.59	114.23	68.20	46.03	PEAK
2	5725.00	53.43	-0.34	53.09	68.20	-15.11	PEAK
3	5730.05	54.14	-0.29	53.85	68.20	-14.35	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5720 MHz		
Polarization:	Vertical		
Remark:			

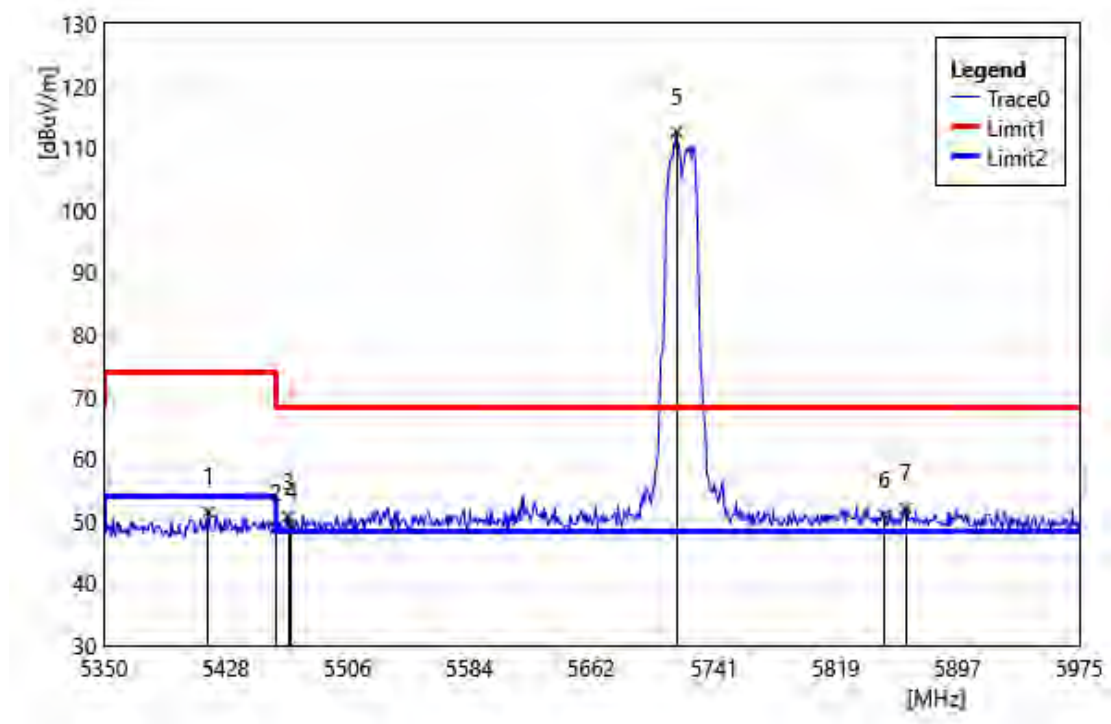


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5416.88	52.24	-0.82	51.42	74.00	-22.58	PEAK
2	5460.00	49.38	-0.57	48.81	74.00	-25.19	PEAK
3	5468.13	51.26	-0.56	50.71	68.20	-17.50	PEAK
4	5470.00	49.87	-0.56	49.31	68.20	-18.89	PEAK
5	5716.88	113.00	-0.43	112.57	68.20	44.37	PEAK
6	5850.00	50.70	0.28	50.98	68.20	-17.22	PEAK
7	5863.75	51.77	0.32	52.09	68.20	-16.11	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5720 MHz		
Polarization:	Horizontal		
Remark:			

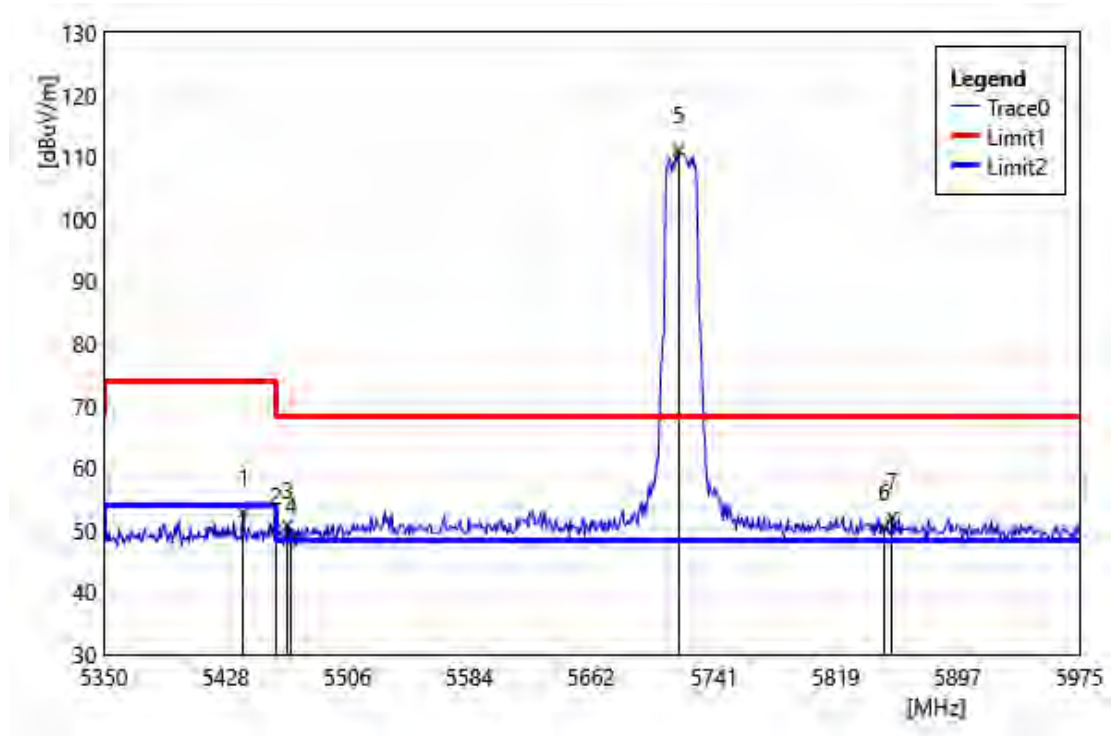


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5439.38	53.50	-0.66	52.84	74.00	-21.16	PEAK
2	5460.00	50.47	-0.57	49.90	74.00	-24.10	PEAK
3	5467.50	51.25	-0.57	50.68	68.20	-17.52	PEAK
4	5470.00	48.96	-0.56	48.40	68.20	-19.80	PEAK
5	5718.13	111.54	-0.42	111.12	68.20	42.92	PEAK
6	5850.00	50.12	0.28	50.40	68.20	-17.80	PEAK
7	5855.00	51.76	0.29	52.05	68.20	-16.15	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5720 MHz		
Polarization:	Vertical		
Remark:			

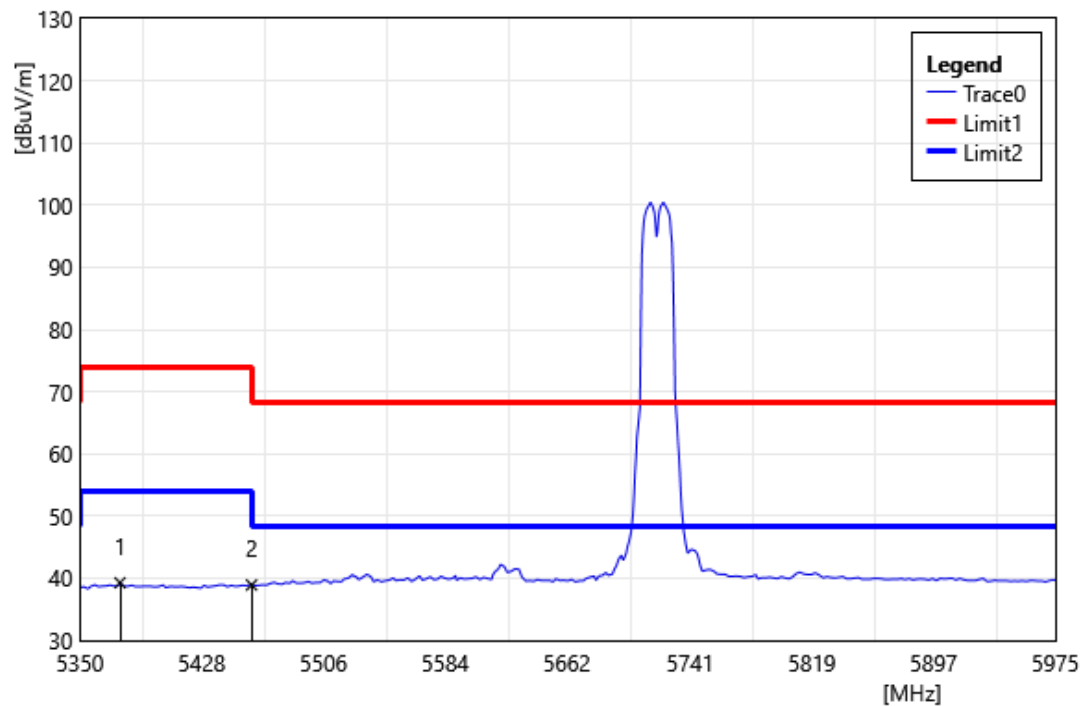


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5375.63	40.39	-1.11	39.28	54.00	-14.72	AVG
2	5460.00	39.48	-0.57	38.91	54.00	-15.09	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5720 MHz		
Polarization:	Horizontal		
Remark:			

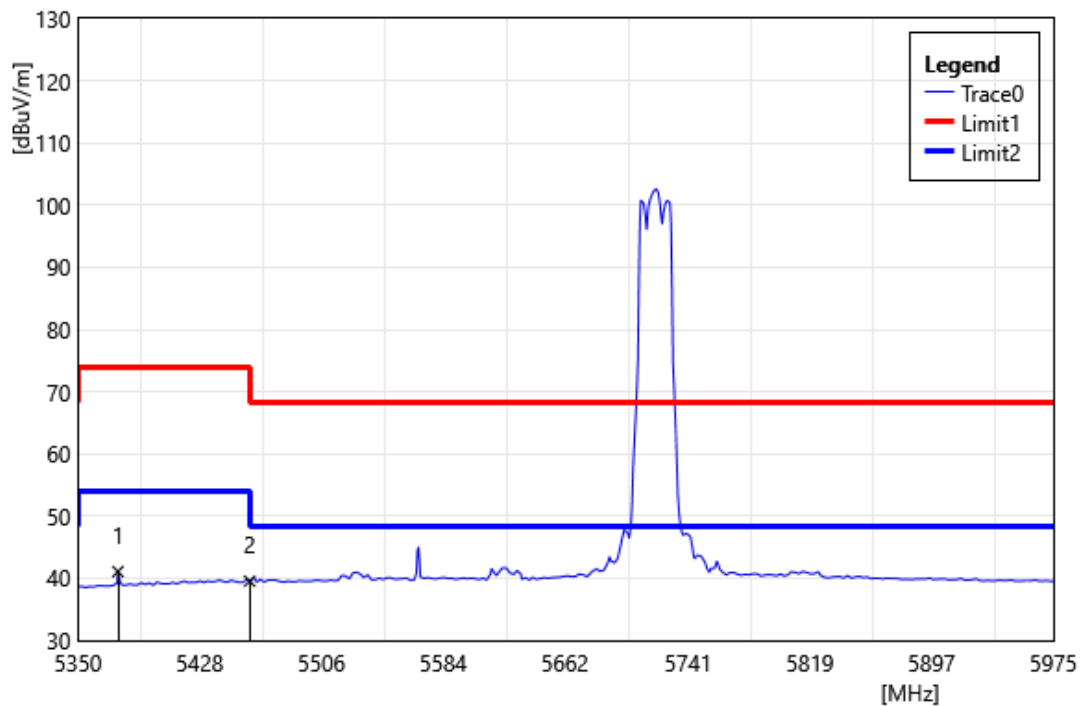


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5375.63	42.18	-1.11	41.07	54.00	-12.93	AVG
2	5460.00	40.11	-0.57	39.54	54.00	-14.46	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5745 MHz		
Polarization:	Vertical		
Remark:			

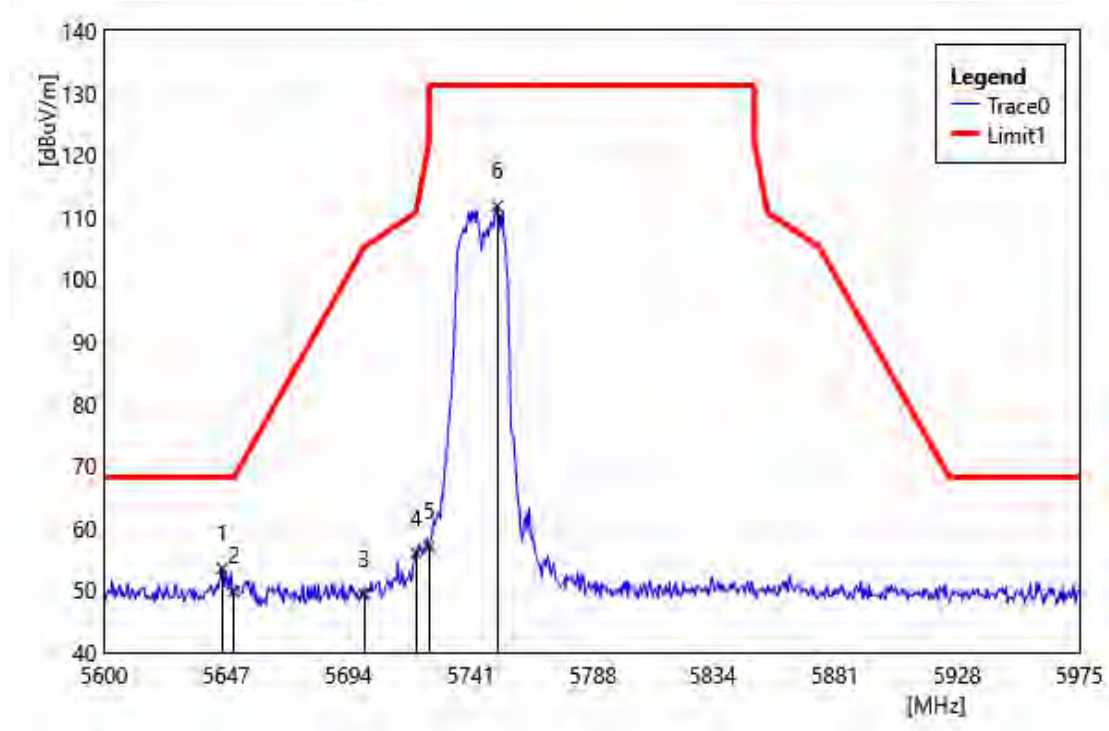


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5645.38	54.14	-0.63	53.52	68.20	-14.69	PEAK
2	5650.00	50.44	-0.64	49.80	68.20	-18.40	PEAK
3	5700.00	49.97	-0.61	49.36	105.20	-55.84	PEAK
4	5720.00	56.37	-0.40	55.97	110.80	-54.83	PEAK
5	5725.00	57.28	-0.34	56.94	122.20	-65.26	PEAK
6	5751.13	111.82	-0.07	111.75	131.20	-19.45	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5745 MHz		
Polarization:	Horizontal		
Remark:			

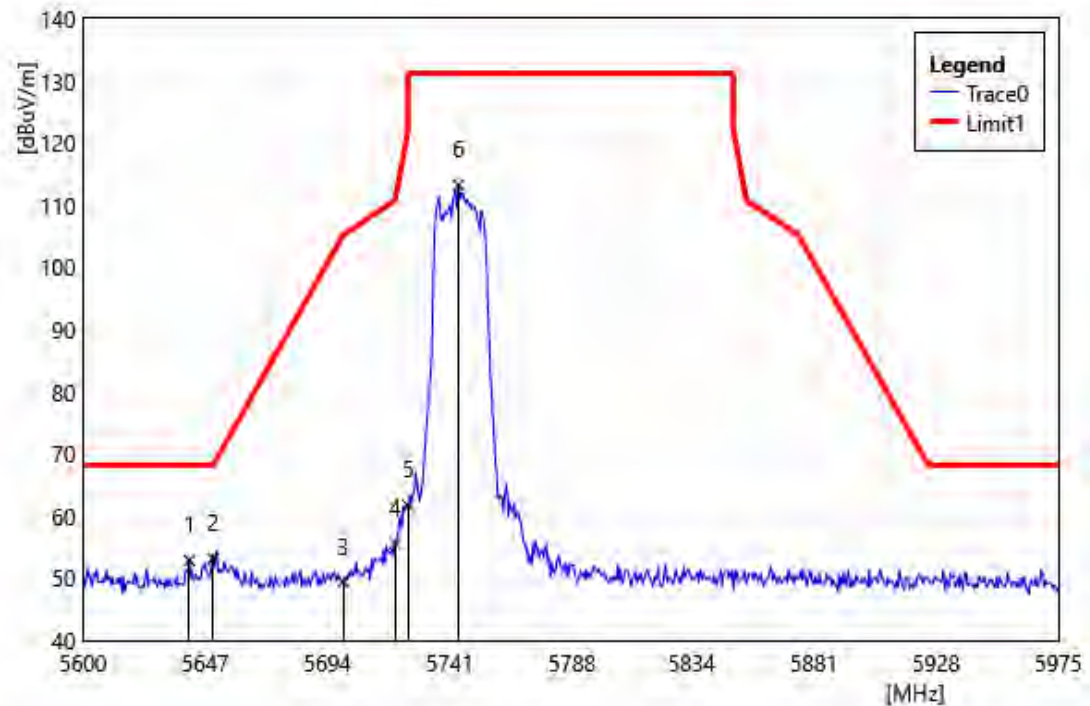


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5640.88	53.50	-0.63	52.88	68.20	-15.33	PEAK
2	5650.00	53.82	-0.64	53.18	68.20	-15.02	PEAK
3	5700.00	50.02	-0.61	49.41	105.20	-55.79	PEAK
4	5720.00	56.03	-0.40	55.63	110.80	-55.17	PEAK
5	5725.00	62.05	-0.34	61.71	122.20	-60.49	PEAK
6	5744.38	113.38	-0.14	113.25	131.20	-17.96	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5785 MHz		
Polarization:	Vertical		
Remark:			

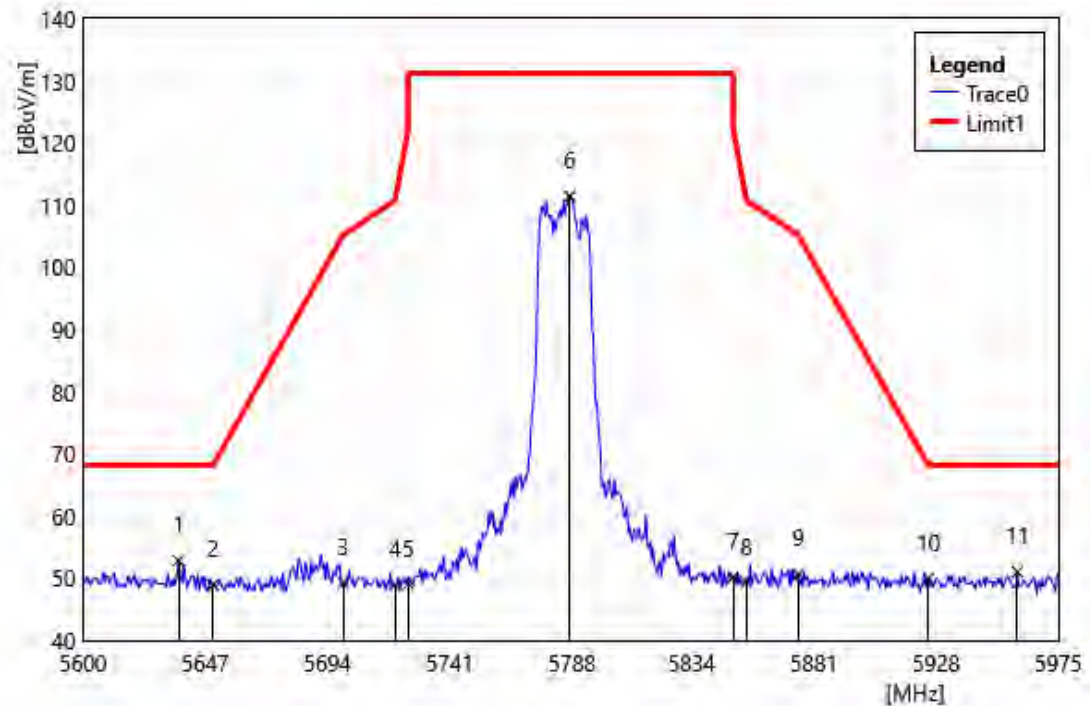


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5636.75	53.45	-0.62	52.83	68.20	-15.37	PEAK
2	5650.00	49.55	-0.64	48.91	68.20	-19.29	PEAK
3	5700.00	49.84	-0.61	49.23	105.20	-55.97	PEAK
4	5720.00	49.34	-0.40	48.94	110.80	-61.86	PEAK
5	5725.00	49.45	-0.34	49.11	122.20	-73.09	PEAK
6	5787.13	111.35	0.09	111.44	131.20	-19.76	PEAK
7	5850.00	49.91	0.28	50.19	122.20	-72.01	PEAK
8	5855.00	49.13	0.29	49.42	110.80	-61.38	PEAK
9	5875.00	50.39	0.34	50.73	105.20	-54.47	PEAK
10	5925.00	49.61	0.28	49.89	68.20	-18.31	PEAK
11	5959.25	50.85	0.16	51.01	68.20	-17.19	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5785 MHz		
Polarization:	Horizontal		
Remark:			

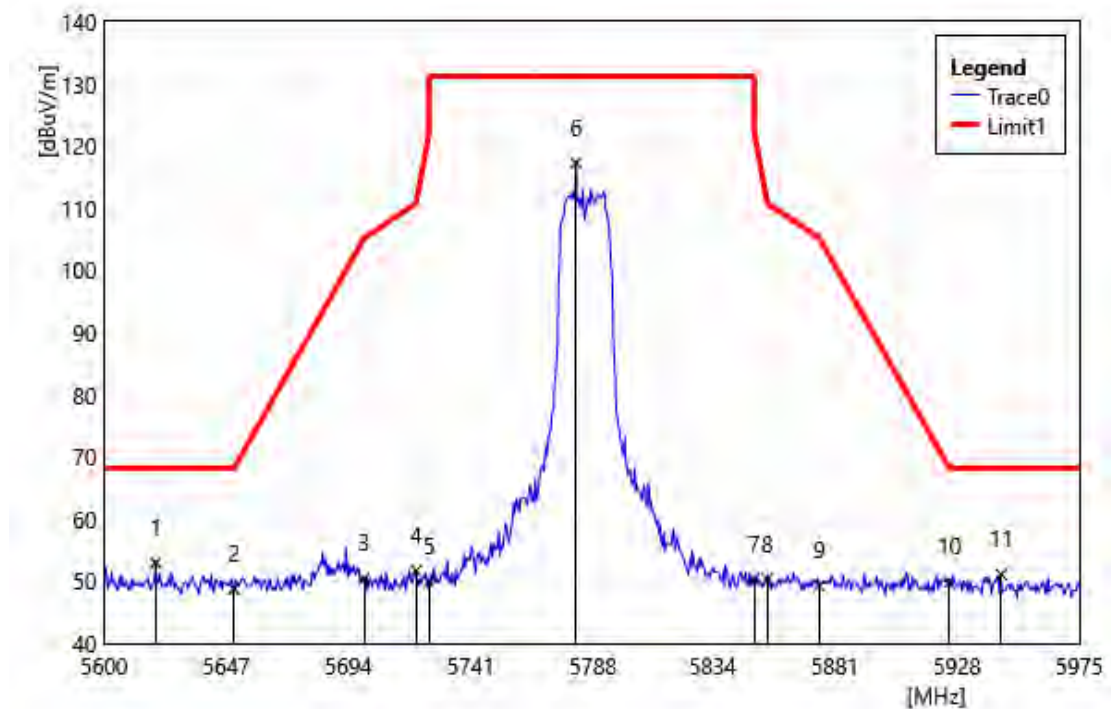


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5619.88	53.57	-0.60	52.97	68.20	-15.23	PEAK
2	5650.00	49.41	-0.64	48.77	68.20	-19.43	PEAK
3	5700.00	51.00	-0.61	50.39	105.20	-54.81	PEAK
4	5720.00	52.07	-0.40	51.67	110.80	-59.13	PEAK
5	5725.00	50.18	-0.34	49.84	122.20	-72.36	PEAK
6	5781.50	117.23	0.06	117.29	131.20	-13.91	PEAK
7	5850.00	50.05	0.28	50.33	122.20	-71.87	PEAK
8	5855.00	50.06	0.29	50.35	110.80	-60.45	PEAK
9	5875.00	48.91	0.34	49.25	105.20	-55.95	PEAK
10	5925.00	49.52	0.28	49.80	68.20	-18.40	PEAK
11	5945.00	50.93	0.17	51.10	68.20	-17.10	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5825 MHz		
Polarization:	Vertical		
Remark:			

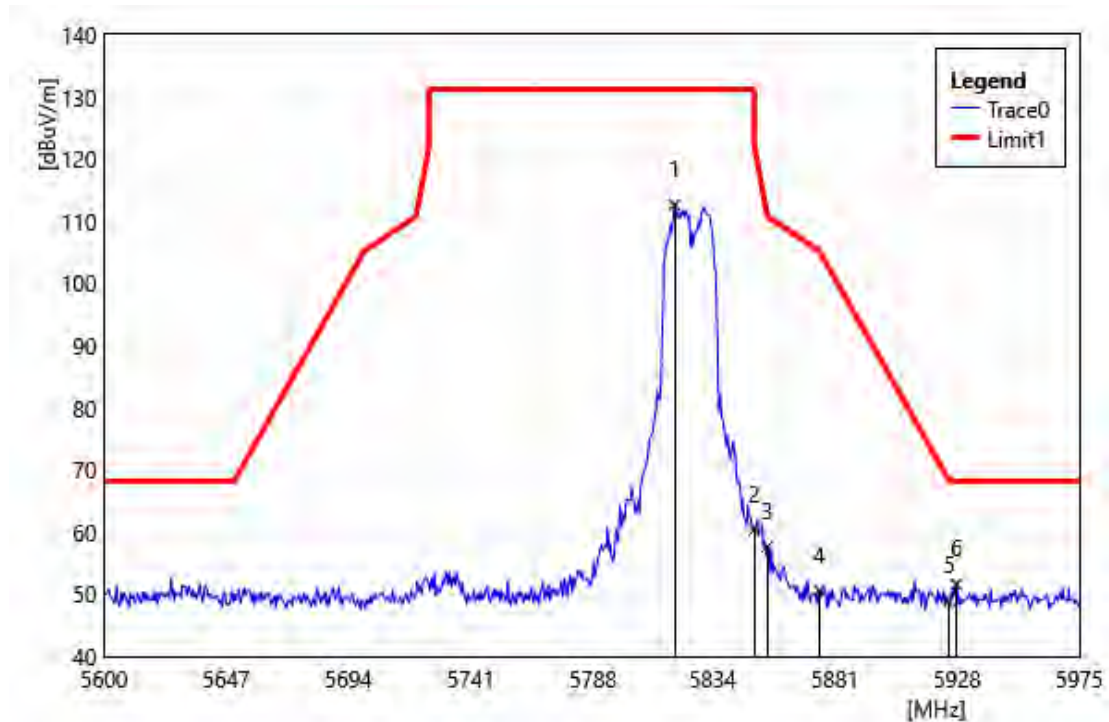


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5819.38	112.43	0.20	112.63	131.20	-18.57	PEAK
2	5850.00	60.09	0.28	60.37	122.20	-61.83	PEAK
3	5855.00	57.34	0.29	57.63	110.80	-53.17	PEAK
4	5875.00	50.31	0.34	50.65	105.20	-54.55	PEAK
5	5925.00	48.76	0.28	49.04	68.20	-19.16	PEAK
6	5927.75	51.36	0.26	51.62	68.20	-16.58	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5825 MHz		
Polarization:	Horizontal		
Remark:			

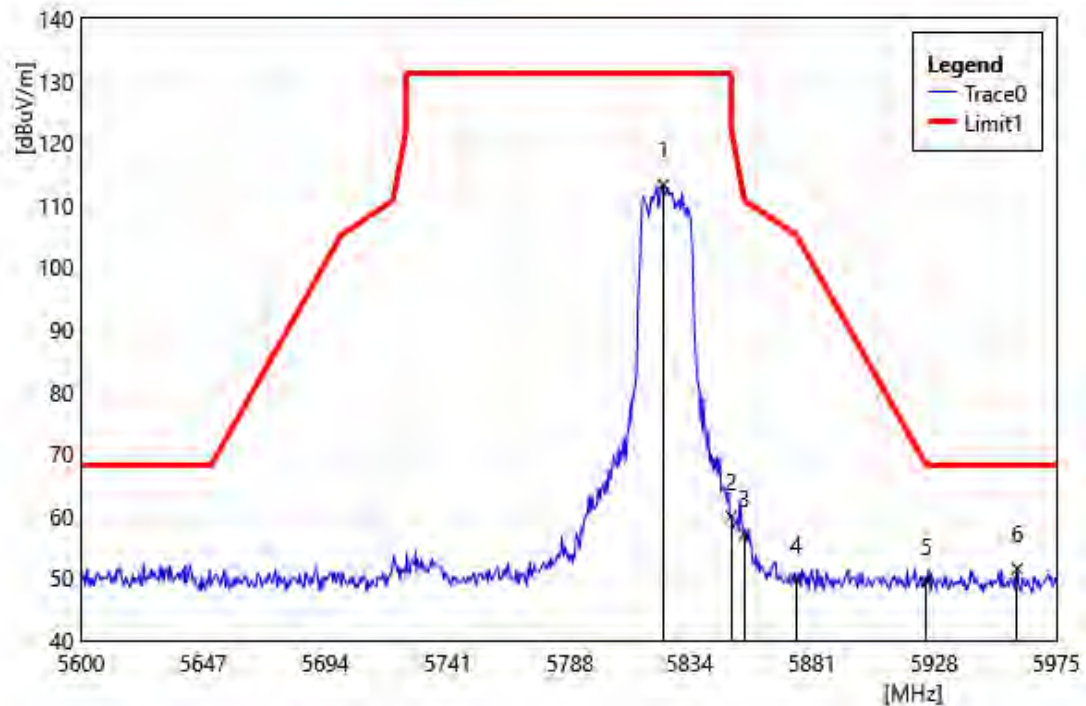


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5823.88	113.06	0.21	113.27	131.20	-17.93	PEAK
2	5850.00	59.63	0.28	59.91	122.20	-62.29	PEAK
3	5855.00	56.73	0.29	57.02	110.80	-53.78	PEAK
4	5875.00	49.43	0.34	49.77	105.20	-55.43	PEAK
5	5925.00	49.16	0.28	49.44	68.20	-18.76	PEAK
6	5960.00	51.35	0.17	51.52	68.20	-16.68	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5190 MHz		
Polarization:	Vertical		
Remark:			

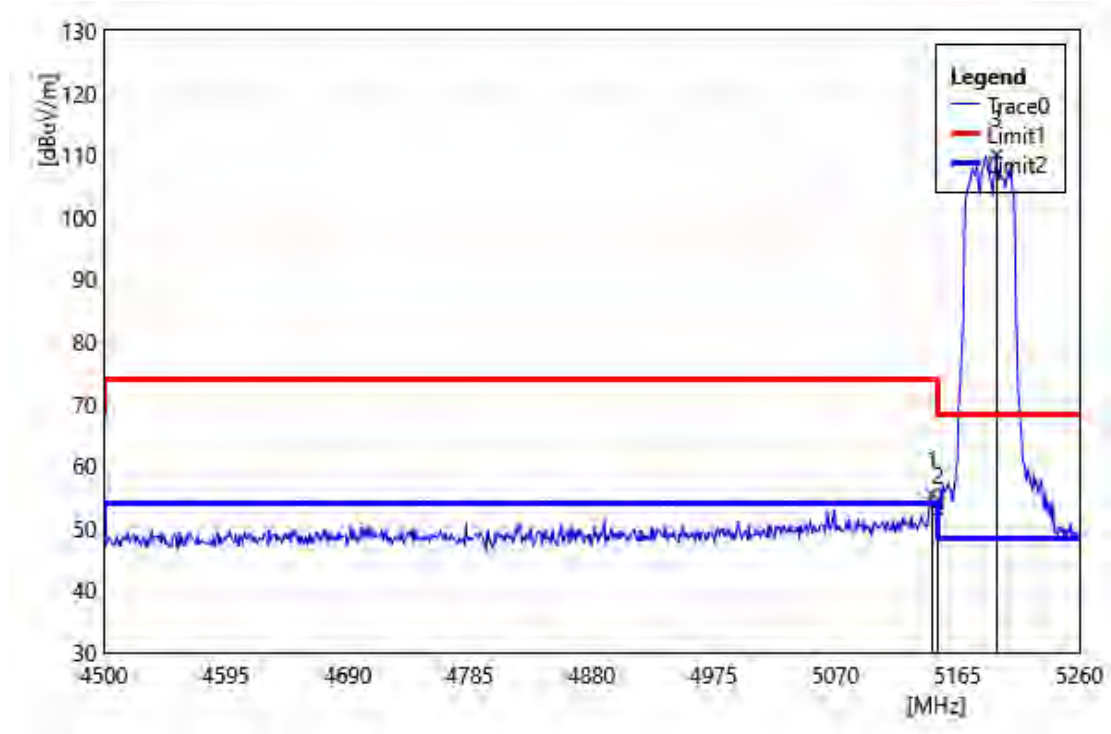


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5145.24	56.40	-0.90	55.50	74.00	-18.50	PEAK
2	5150.00	53.77	-0.91	52.86	74.00	-21.14	PEAK
3	5195.40	111.18	-1.13	110.05	68.20	41.85	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5190 MHz		
Polarization:	Horizontal		
Remark:			

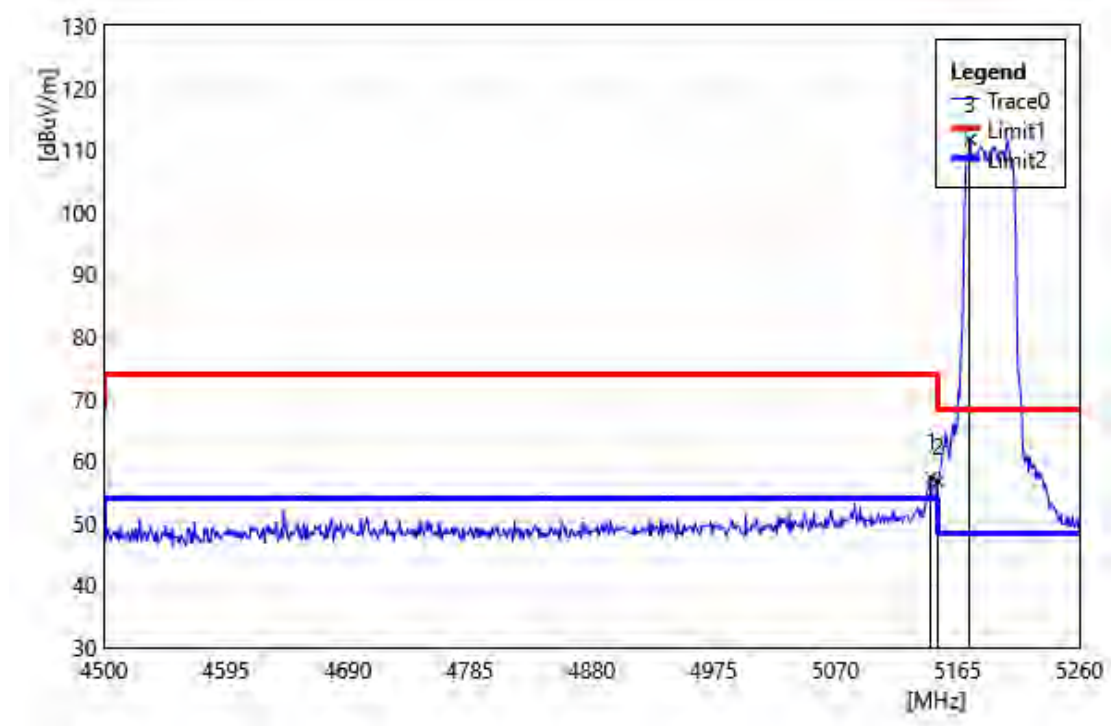


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5144.48	58.25	-0.90	57.35	74.00	-16.65	PEAK
2	5150.00	57.59	-0.91	56.68	74.00	-17.32	PEAK
3	5174.88	112.69	-1.03	111.66	68.20	43.46	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5190 MHz		
Polarization:	Vertical		
Remark:			

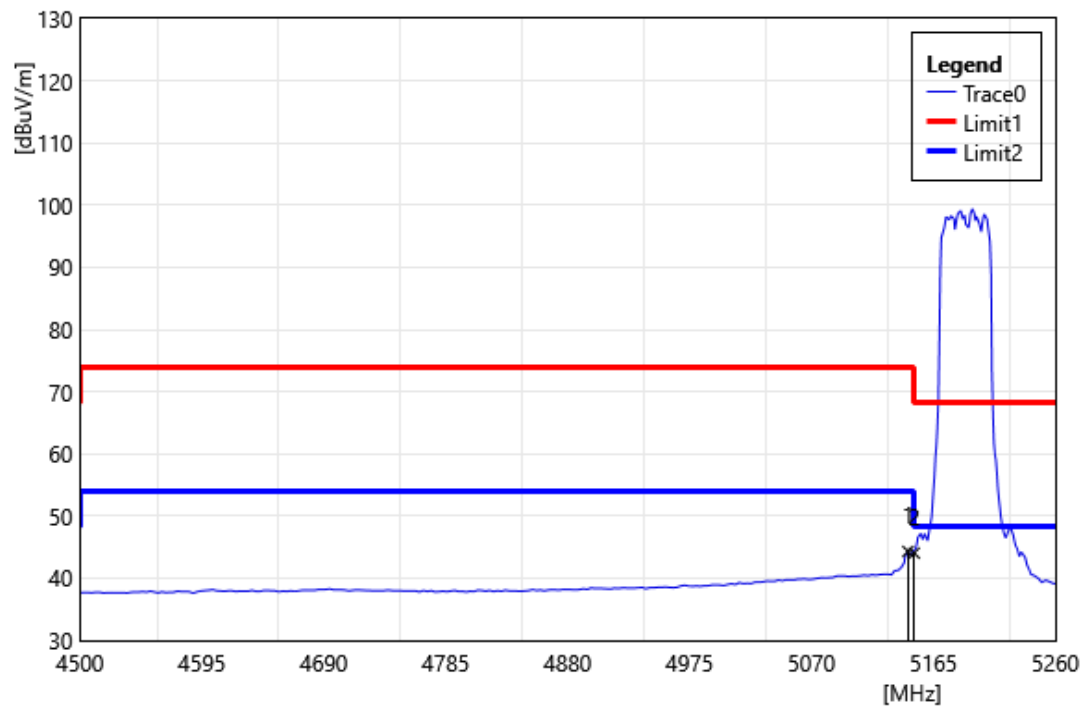


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5145.24	45.21	-0.90	44.31	54.00	-9.69	AVG
2	5150.00	44.96	-0.91	44.06	54.00	-9.94	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5190 MHz		
Polarization:	Horizontal		
Remark:			

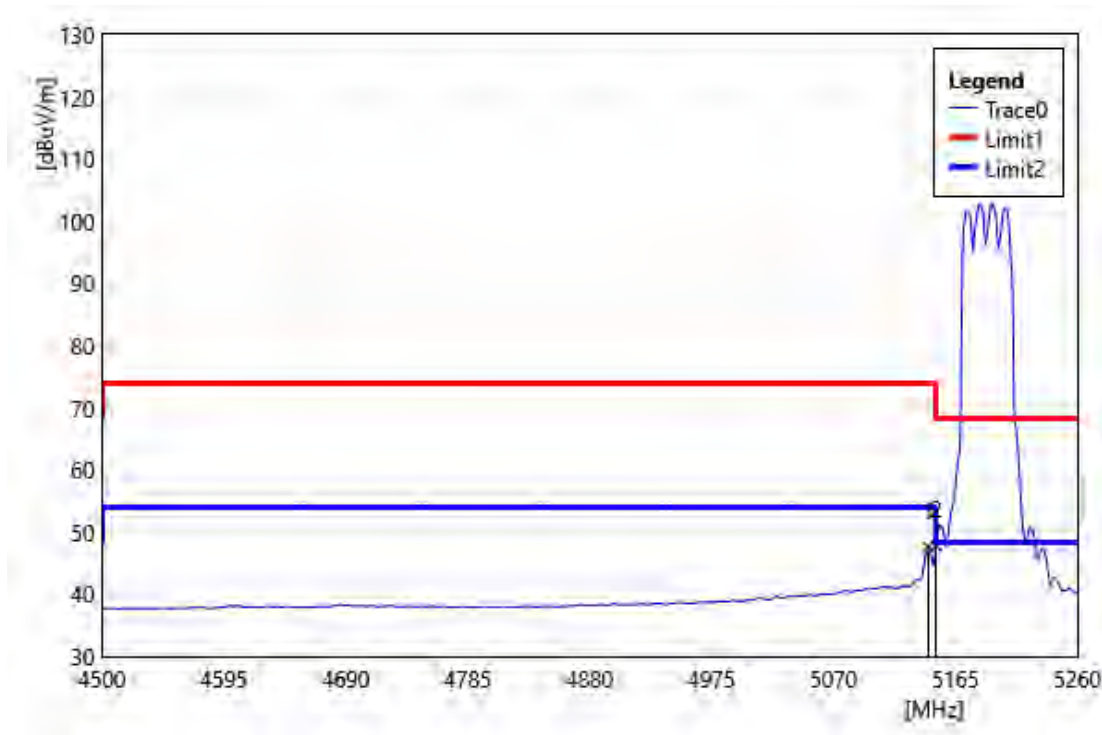


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5143.72	48.53	-0.90	47.63	54.00	-6.37	AVG
2	5150.00	48.75	-0.91	47.84	54.00	-6.16	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5230 MHz		
Polarization:	Vertical		
Remark:			

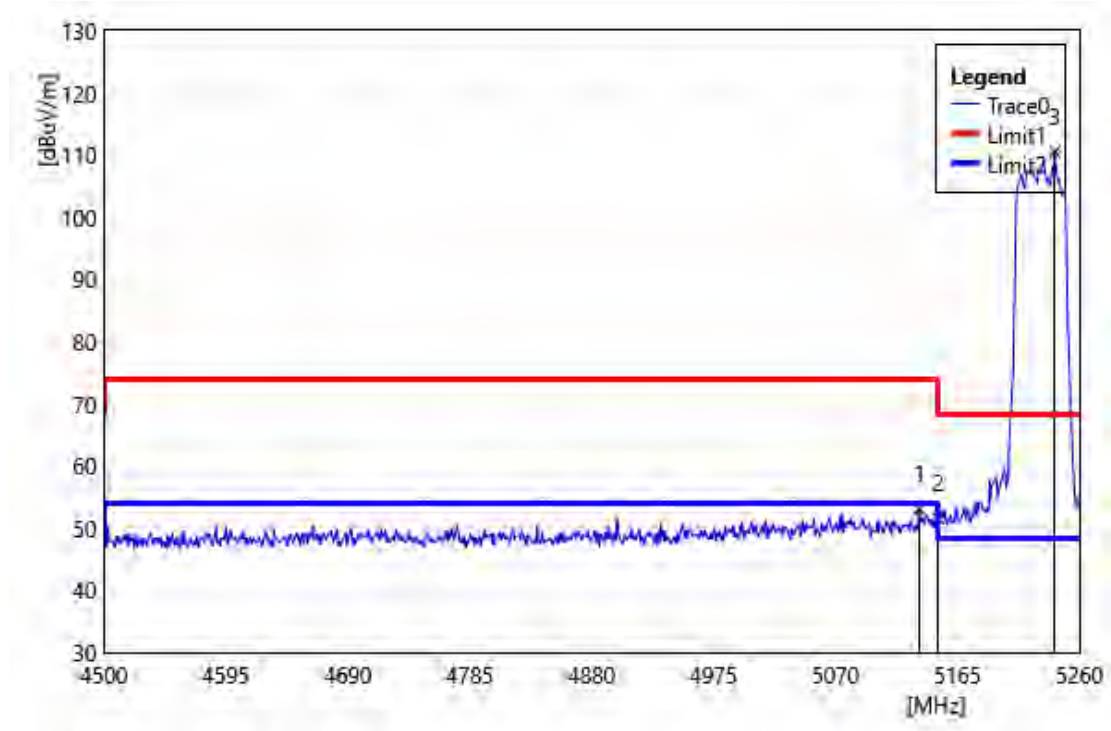


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5135.36	53.92	-0.89	53.03	74.00	-20.98	PEAK
2	5150.00	52.47	-0.91	51.56	74.00	-22.44	PEAK
3	5241.00	111.95	-1.44	110.51	68.20	42.31	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5230 MHz		
Polarization:	Horizontal		
Remark:			

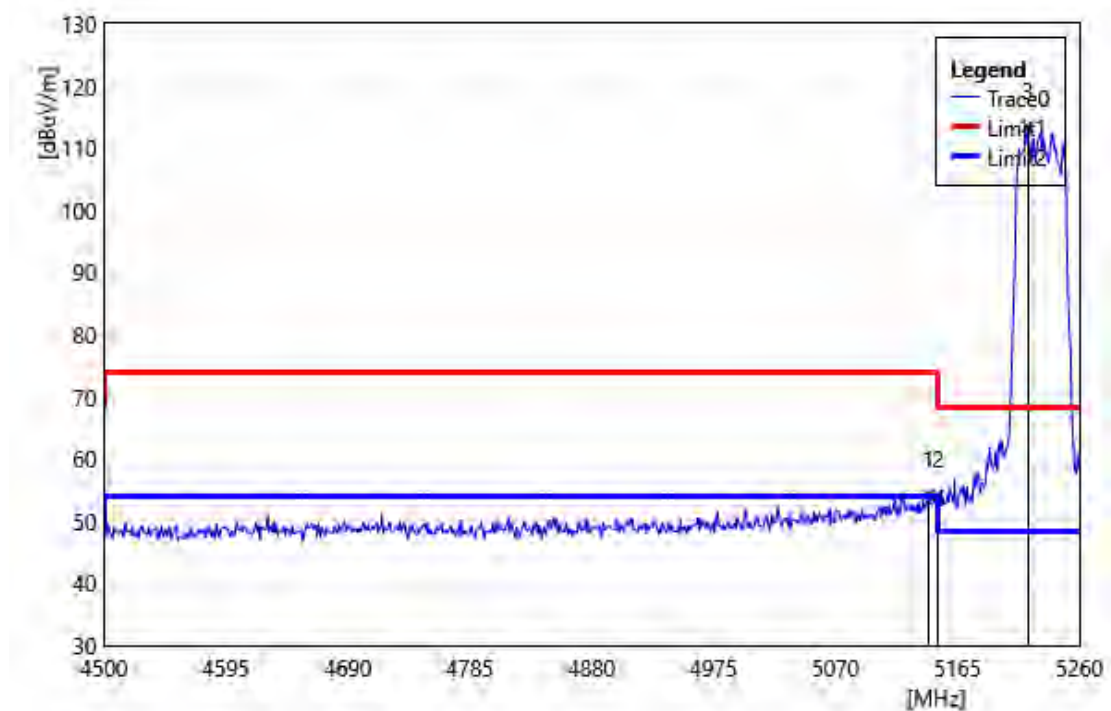


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5142.20	55.18	-0.90	54.28	74.00	-19.72	PEAK
2	5150.00	55.04	-0.91	54.14	74.00	-19.86	PEAK
3	5219.72	114.68	-1.29	113.39	68.20	45.19	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5230 MHz		
Polarization:	Vertical		
Remark:			

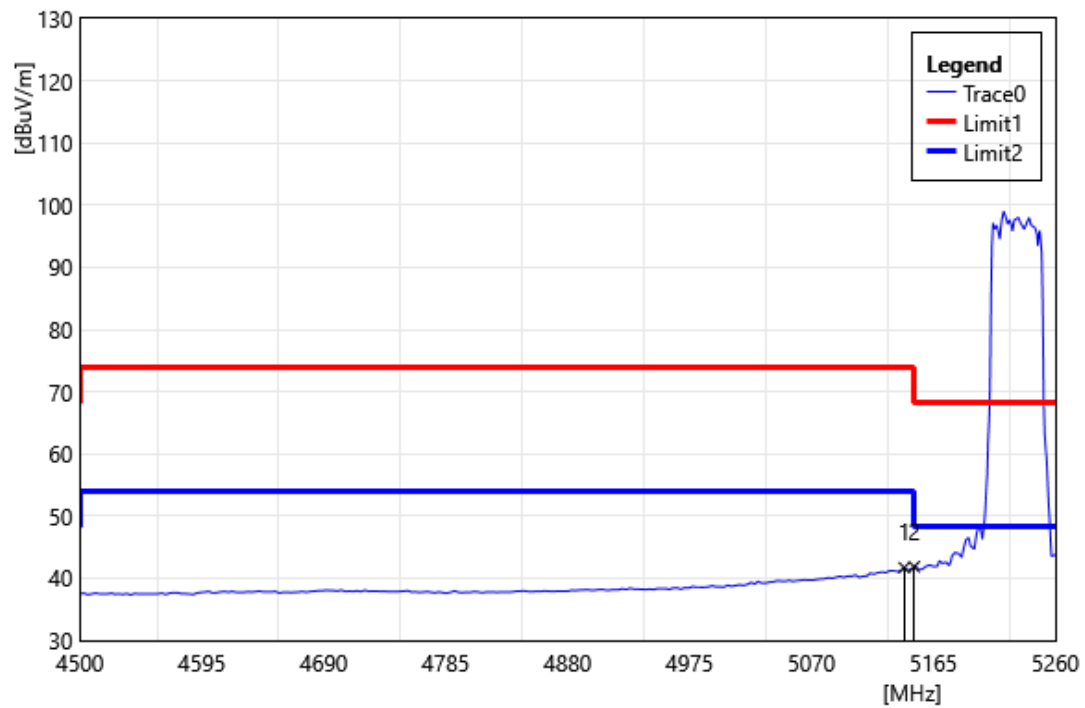


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5142.20	42.60	-0.90	41.70	54.00	-12.30	AVG
2	5150.00	42.74	-0.91	41.84	54.00	-12.16	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5230 MHz		
Polarization:	Horizontal		
Remark:			

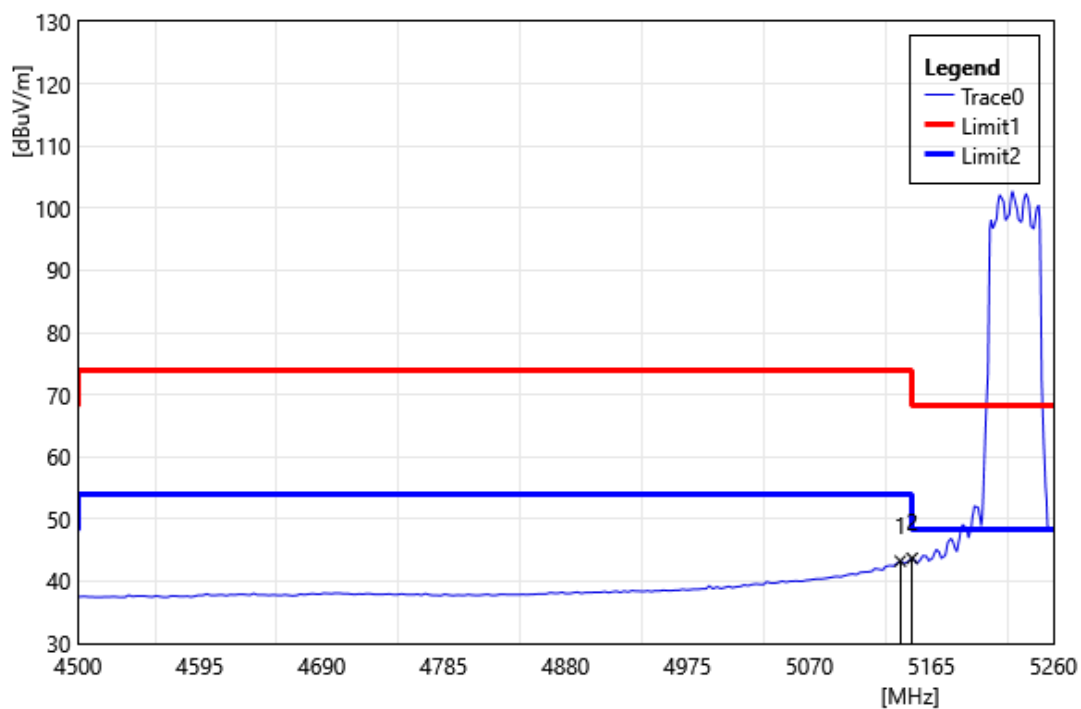


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5140.68	44.14	-0.90	43.24	54.00	-10.76	AVG
2	5150.00	44.60	-0.91	43.69	54.00	-10.31	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5270 MHz		
Polarization:	Vertical		
Remark:			

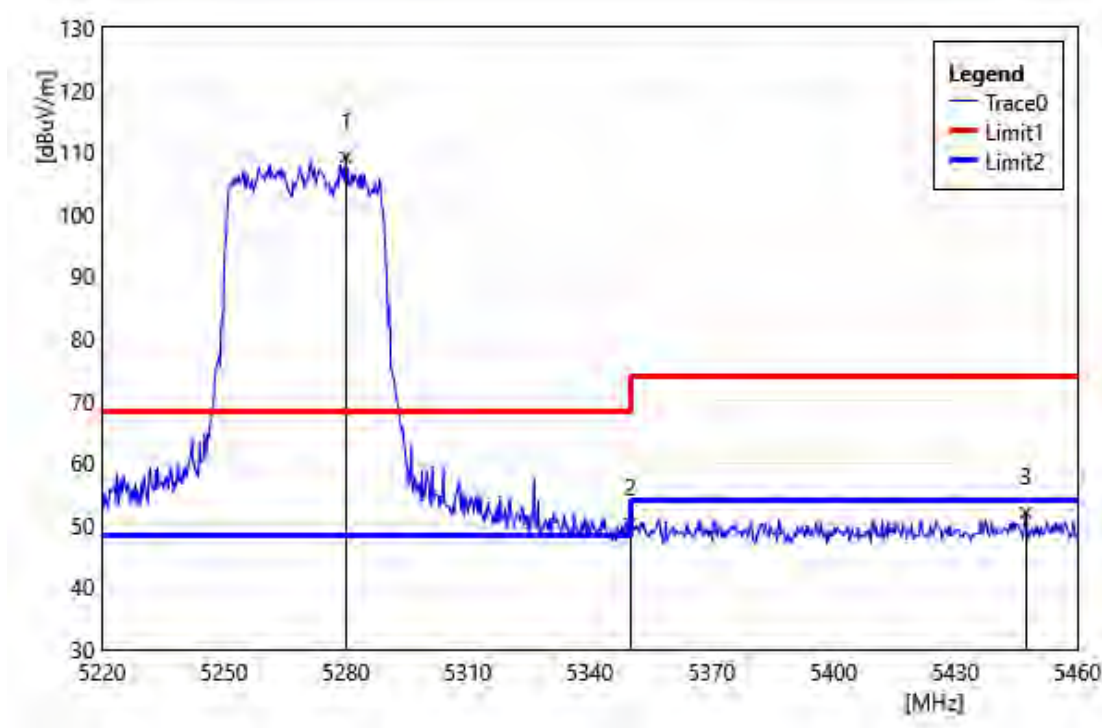


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5280.00	110.79	-1.59	109.20	68.20	41.00	PEAK
2	5350.00	51.56	-1.29	50.27	74.00	-23.73	PEAK
3	5447.28	52.61	-0.60	52.01	74.00	-21.99	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5270 MHz		
Polarization:	Horizontal		
Remark:			

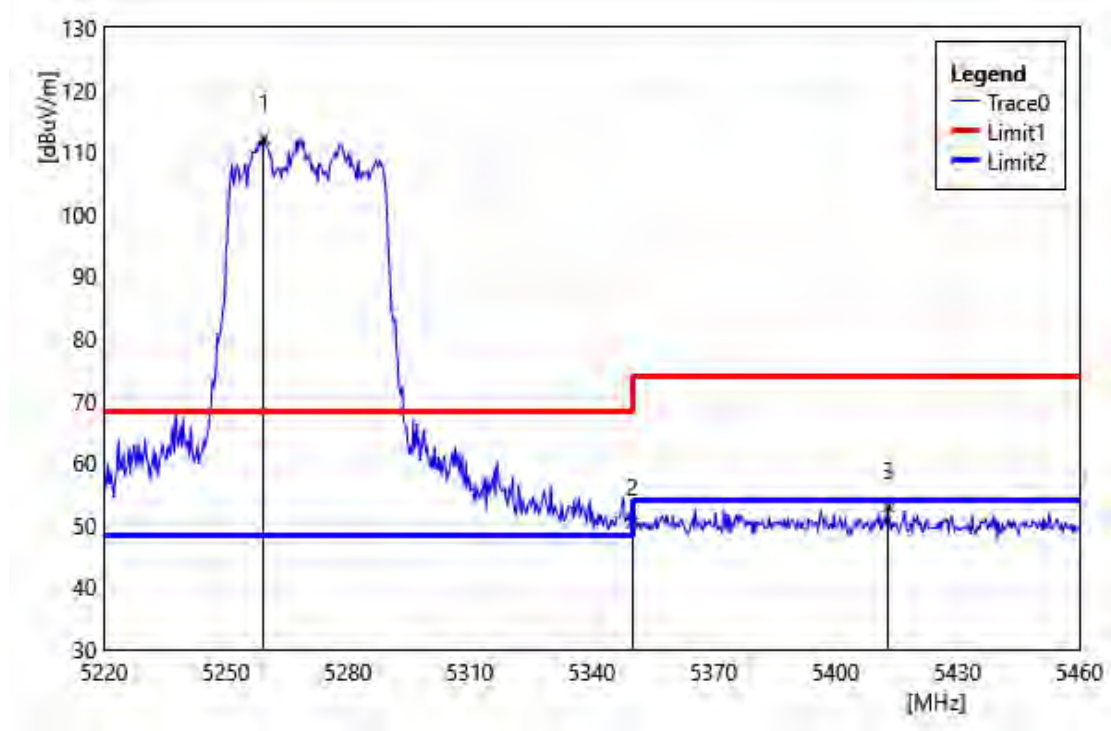


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5259.36	113.75	-1.53	112.22	68.20	44.02	PEAK
2	5350.00	51.66	-1.29	50.36	74.00	-23.64	PEAK
3	5412.96	53.81	-0.85	52.96	74.00	-21.04	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5270 MHz		
Polarization:	Vertical		
Remark:			

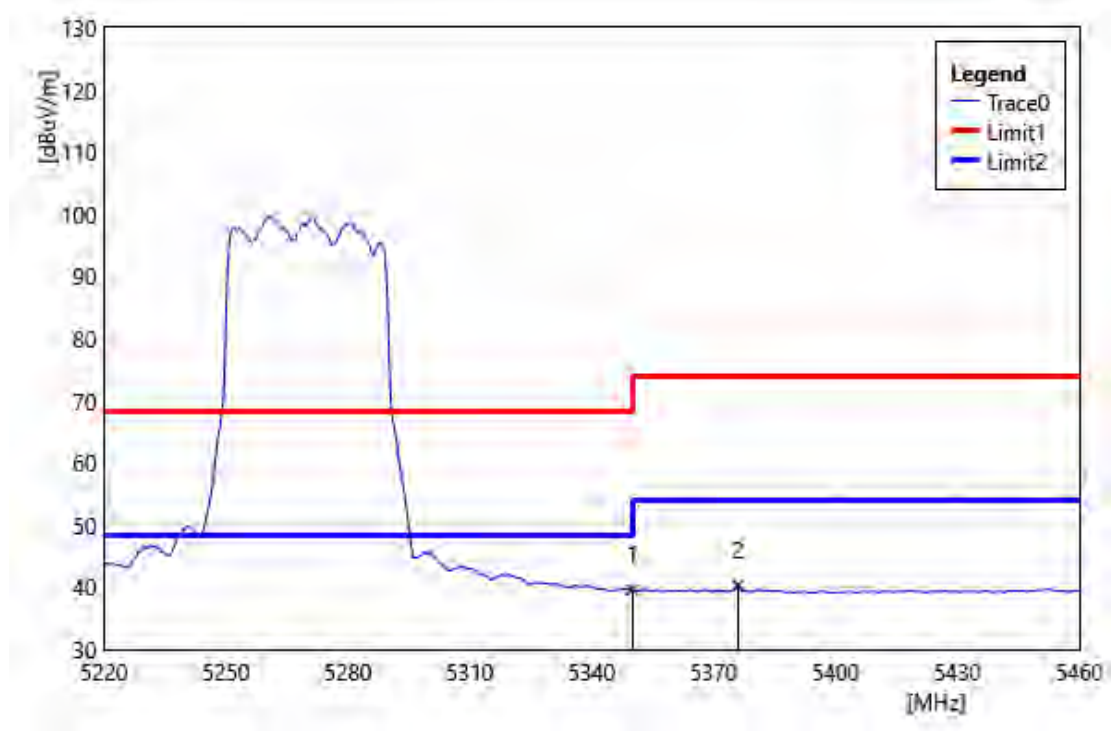


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	40.94	-1.29	39.64	54.00	-14.36	AVG
2	5376.00	41.46	-1.11	40.35	54.00	-13.65	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5270 MHz		
Polarization:	Horizontal		
Remark:			

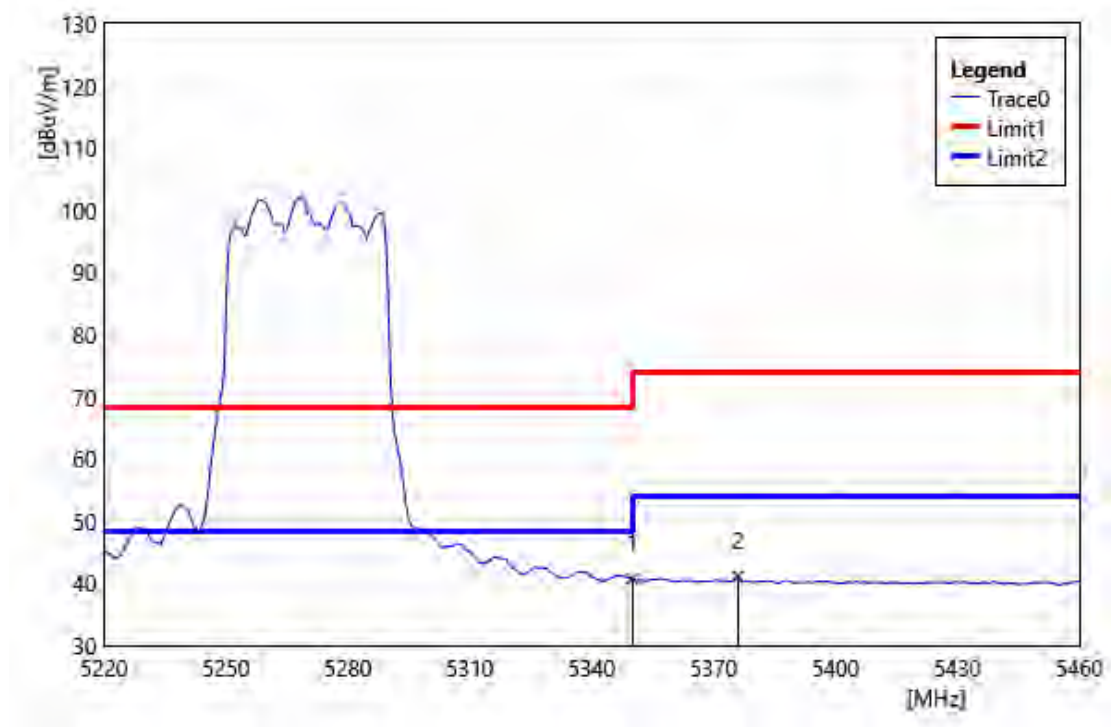


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	42.02	-1.29	40.73	54.00	-13.27	AVG
2	5376.00	42.24	-1.11	41.13	54.00	-12.87	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5310 MHz		
Polarization:	Vertical		
Remark:			

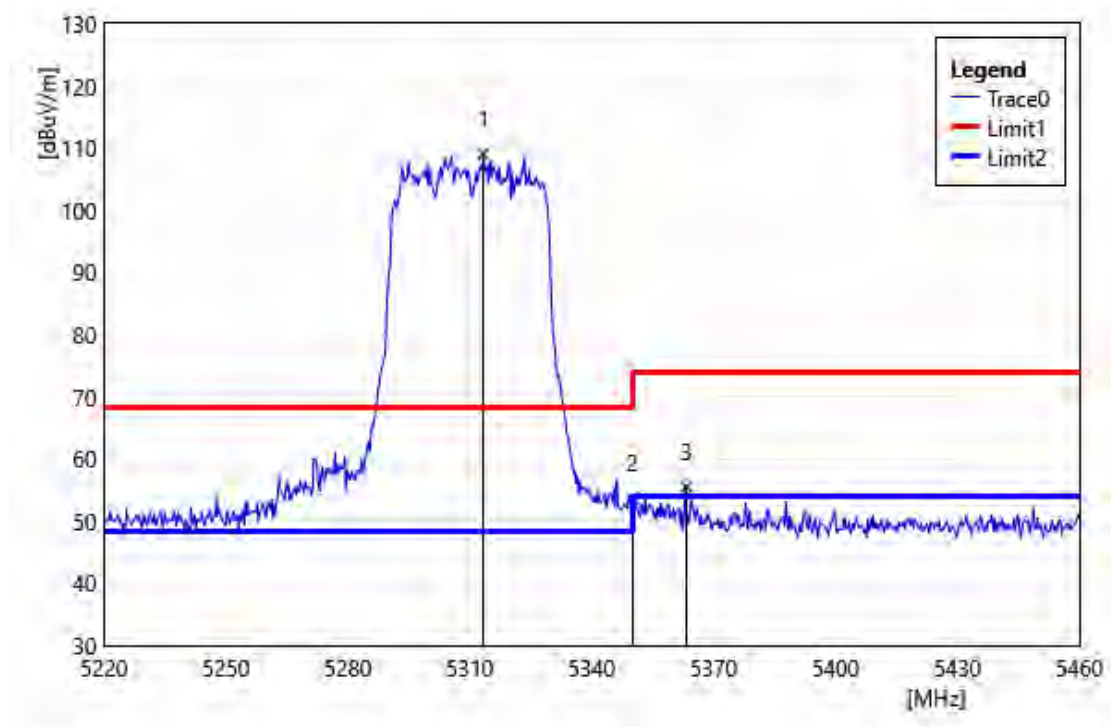


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5313.36	110.61	-1.55	109.06	68.20	40.86	PEAK
2	5350.00	54.95	-1.29	53.66	74.00	-20.34	PEAK
3	5363.28	56.69	-1.20	55.49	74.00	-18.51	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5310 MHz		
Polarization:	Horizontal		
Remark:			

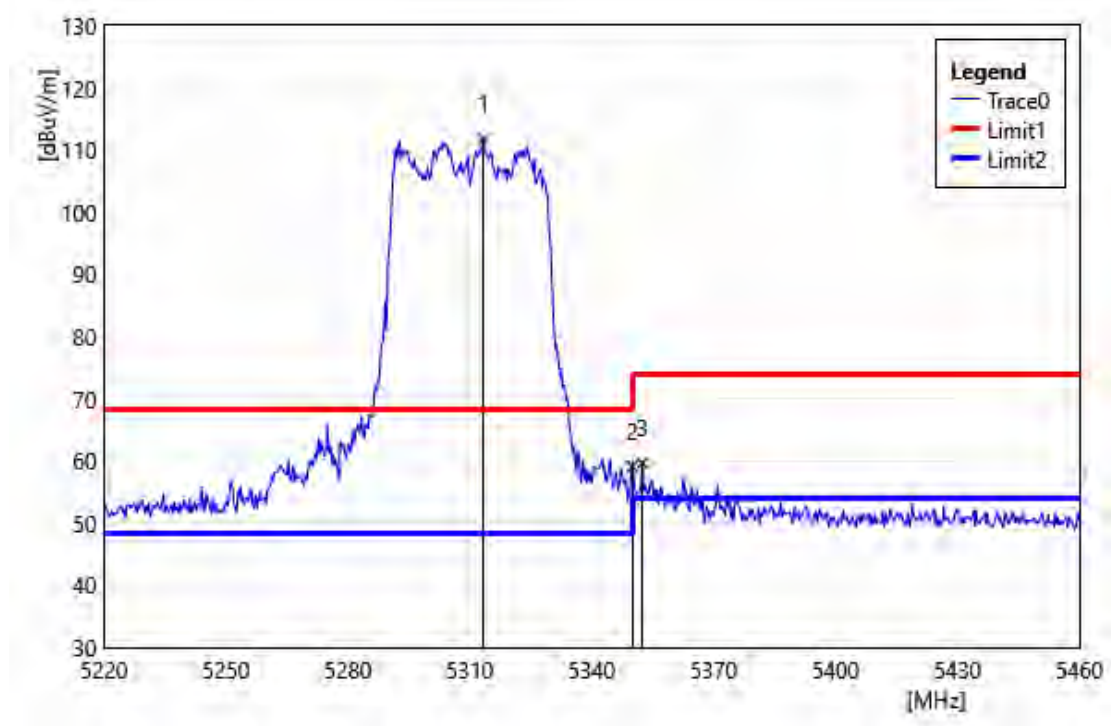


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5313.36	113.32	-1.55	111.77	68.20	43.57	PEAK
2	5350.00	60.41	-1.29	59.12	74.00	-14.88	PEAK
3	5352.48	60.93	-1.27	59.66	74.00	-14.34	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5310 MHz		
Polarization:	Vertical		
Remark:			

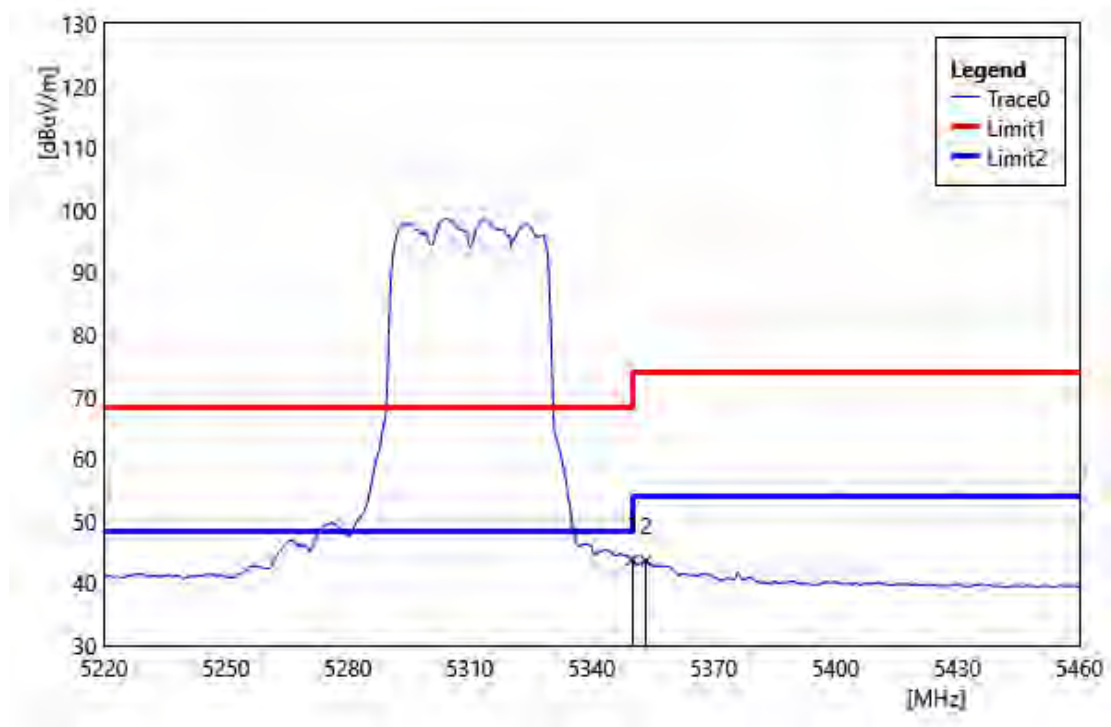


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	45.07	-1.29	43.77	54.00	-10.23	AVG
2	5353.44	44.90	-1.27	43.63	54.00	-10.38	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5310 MHz		
Polarization:	Horizontal		
Remark:			

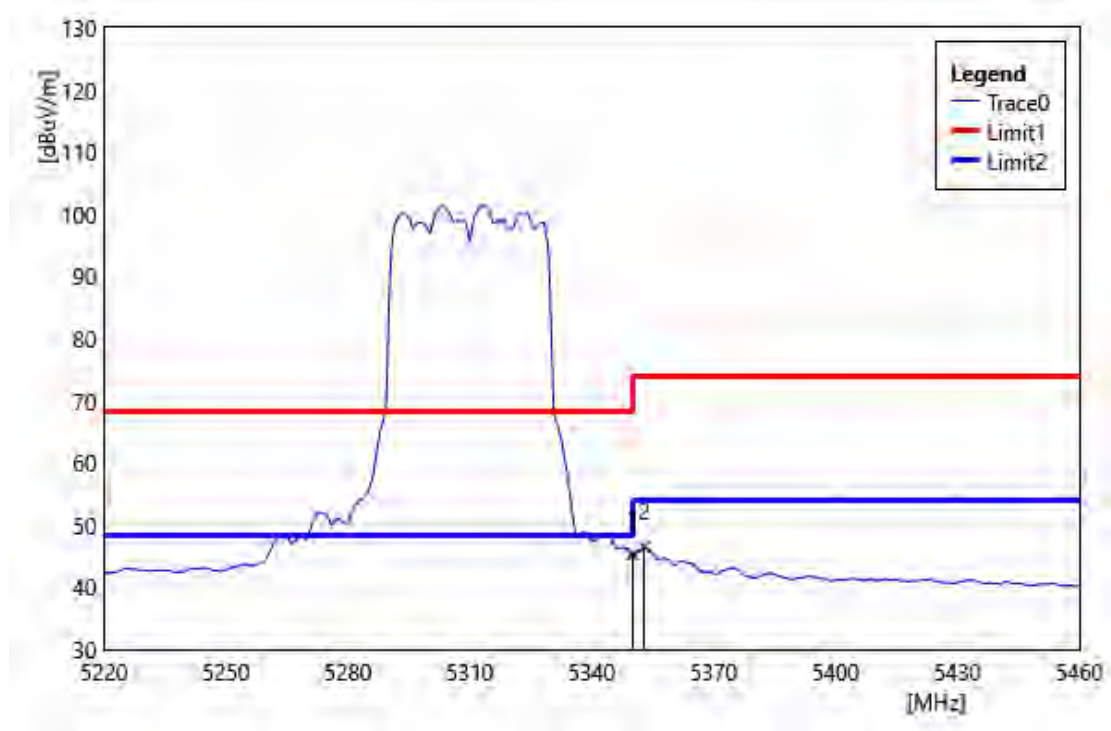


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	46.53	-1.29	45.24	54.00	-8.76	AVG
2	5352.96	47.74	-1.27	46.47	54.00	-7.53	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5510 MHz		
Polarization:	Vertical		
Remark:			

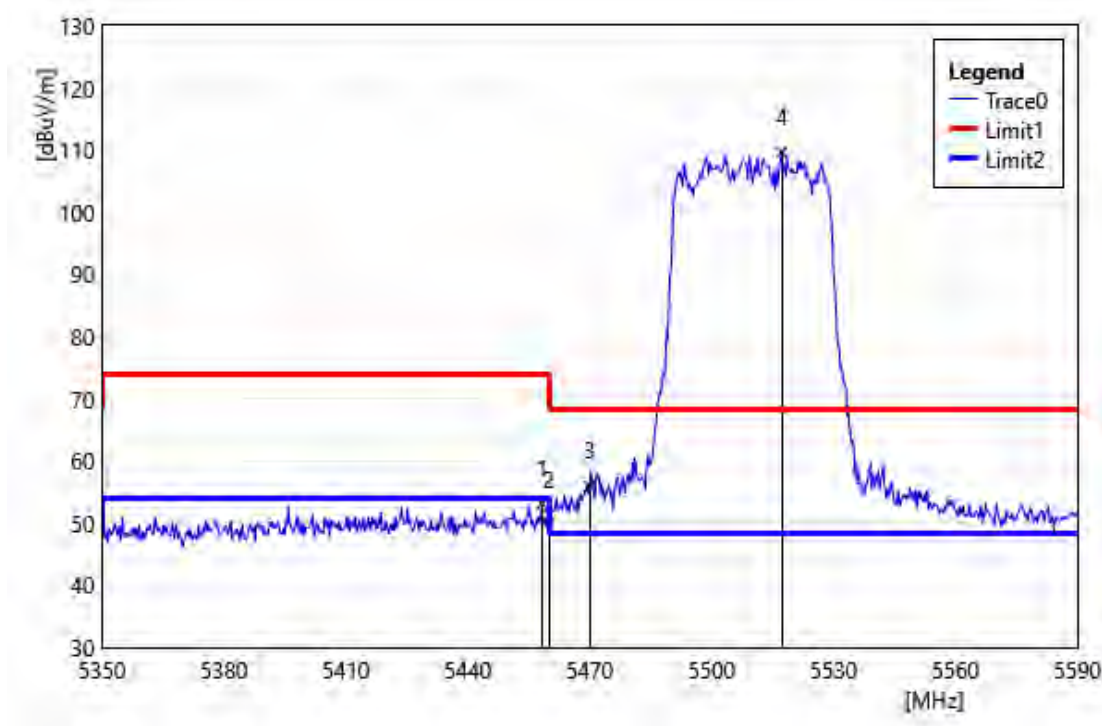


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.24	53.69	-0.58	53.11	74.00	-20.89	PEAK
2	5460.00	51.87	-0.57	51.30	74.00	-22.70	PEAK
3	5470.00	56.46	-0.56	55.90	68.20	-12.30	PEAK
4	5517.28	110.18	-0.52	109.66	68.20	41.46	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5510 MHz		
Polarization:	Horizontal		
Remark:			

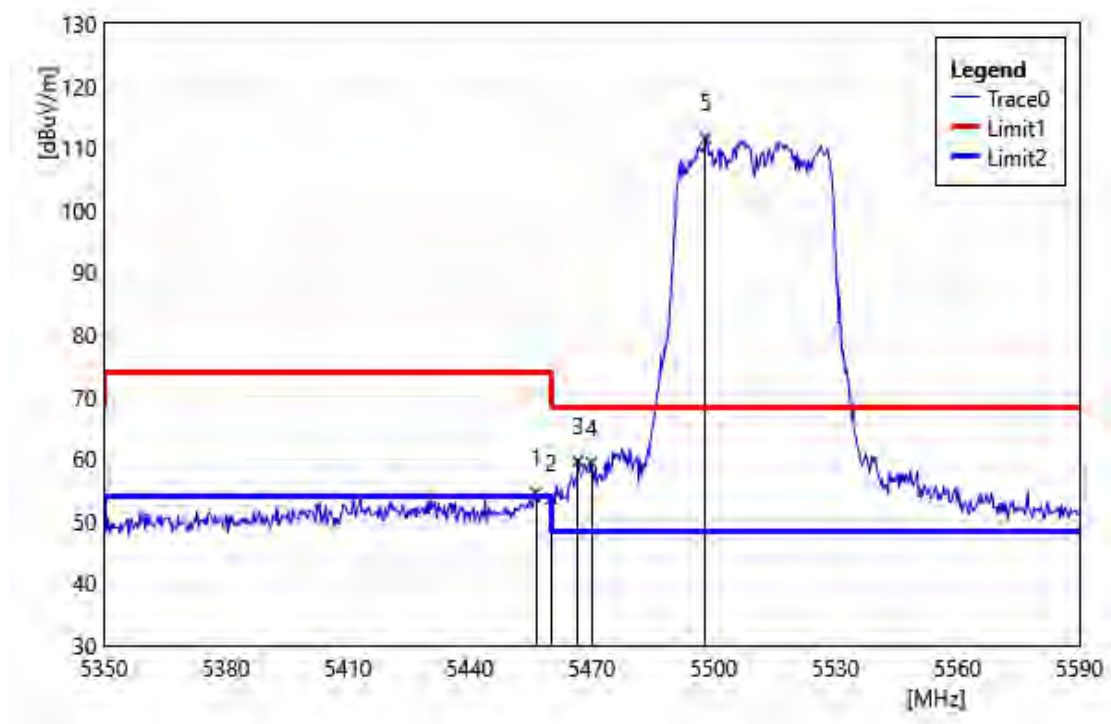


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5456.32	55.15	-0.58	54.57	74.00	-19.43	PEAK
2	5460.00	54.10	-0.57	53.53	74.00	-20.47	PEAK
3	5466.64	60.17	-0.57	59.60	68.20	-8.60	PEAK
4	5470.00	59.94	-0.56	59.38	68.20	-8.82	PEAK
5	5498.08	112.18	-0.53	111.65	68.20	43.45	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5510 MHz		
Polarization:	Vertical		
Remark:			

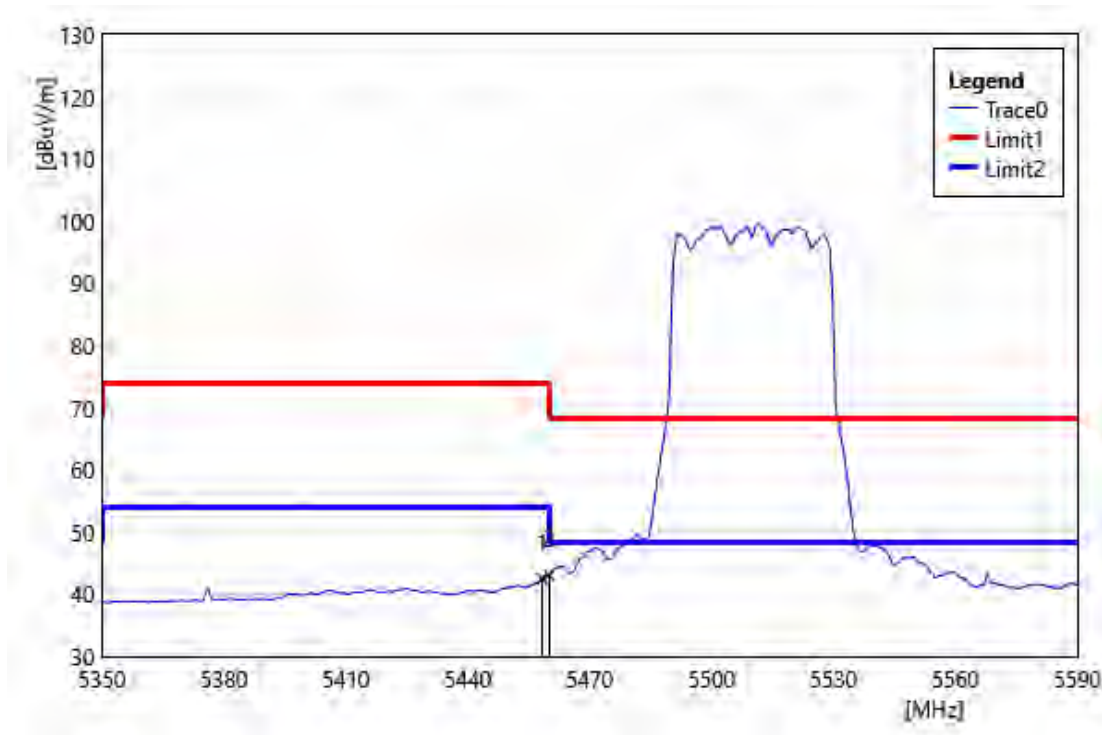


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.24	43.12	-0.58	42.54	54.00	-11.46	AVG
2	5460.00	43.66	-0.57	43.09	54.00	-10.91	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5510 MHz		
Polarization:	Horizontal		
Remark:			

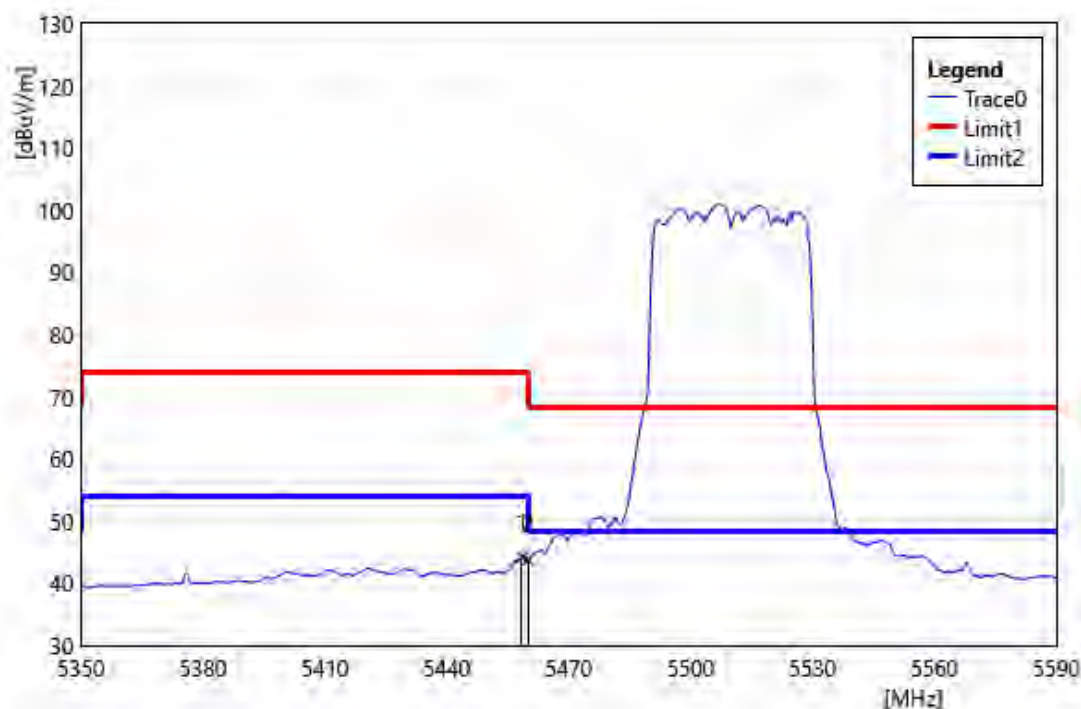


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.48	44.76	-0.57	44.20	54.00	-9.81	AVG
2	5460.00	44.33	-0.57	43.76	54.00	-10.24	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5550 MHz		
Polarization:	Vertical		
Remark:			

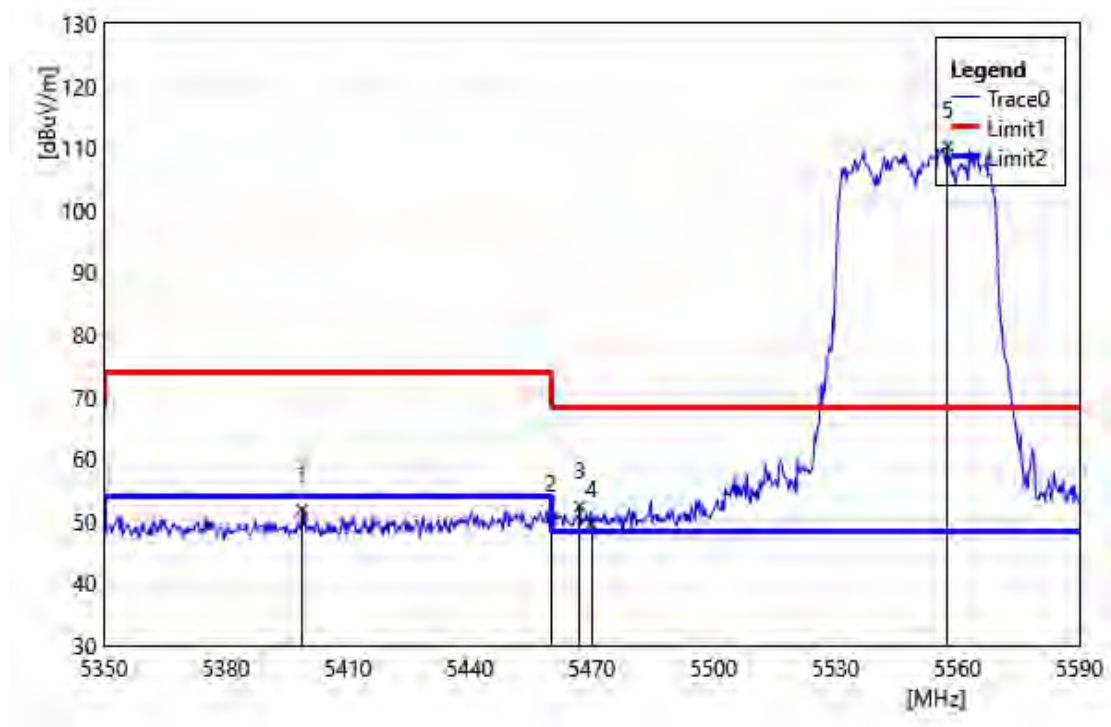


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5398.72	52.87	-0.95	51.92	74.00	-22.08	PEAK
2	5460.00	51.07	-0.57	50.50	74.00	-23.50	PEAK
3	5467.12	52.97	-0.57	52.40	68.20	-15.80	PEAK
4	5470.00	50.06	-0.56	49.50	68.20	-18.70	PEAK
5	5557.60	110.86	-0.51	110.35	68.20	42.15	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5550 MHz		
Polarization:	Horizontal		
Remark:			

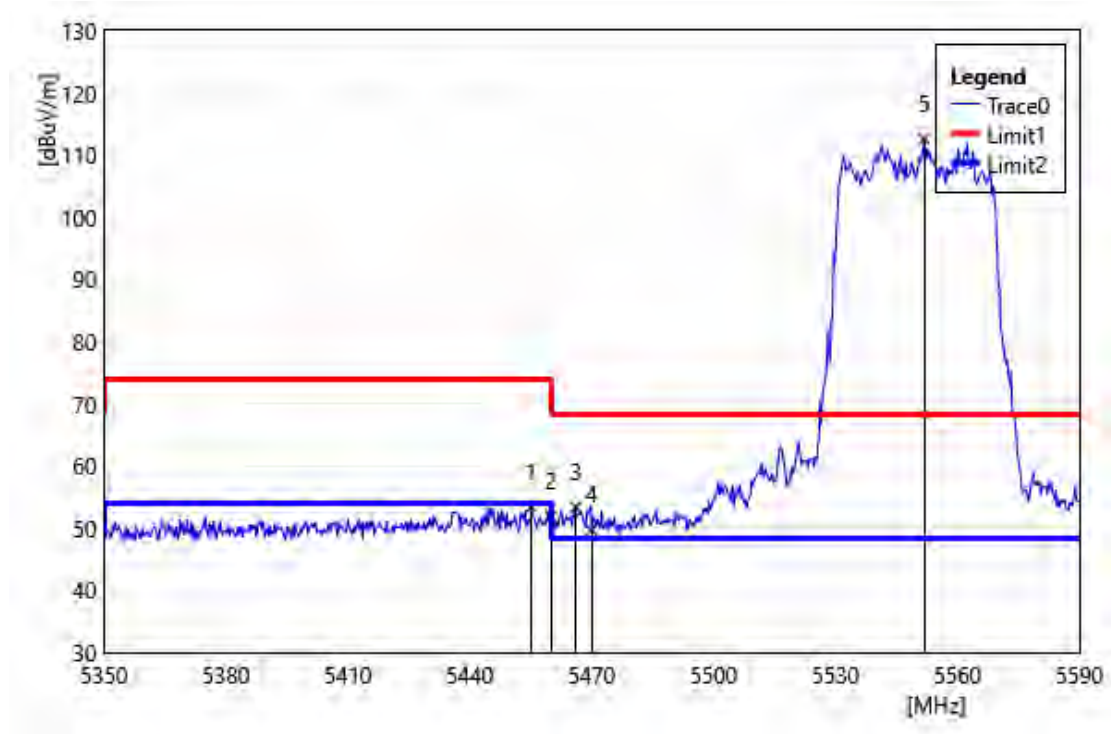


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5455.12	54.00	-0.58	53.42	74.00	-20.58	PEAK
2	5460.00	52.46	-0.57	51.89	74.00	-22.11	PEAK
3	5466.16	53.96	-0.57	53.39	68.20	-14.81	PEAK
4	5470.00	50.23	-0.56	49.67	68.20	-18.53	PEAK
5	5551.84	113.05	-0.50	112.55	68.20	44.35	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5550 MHz		
Polarization:	Vertical		
Remark:			

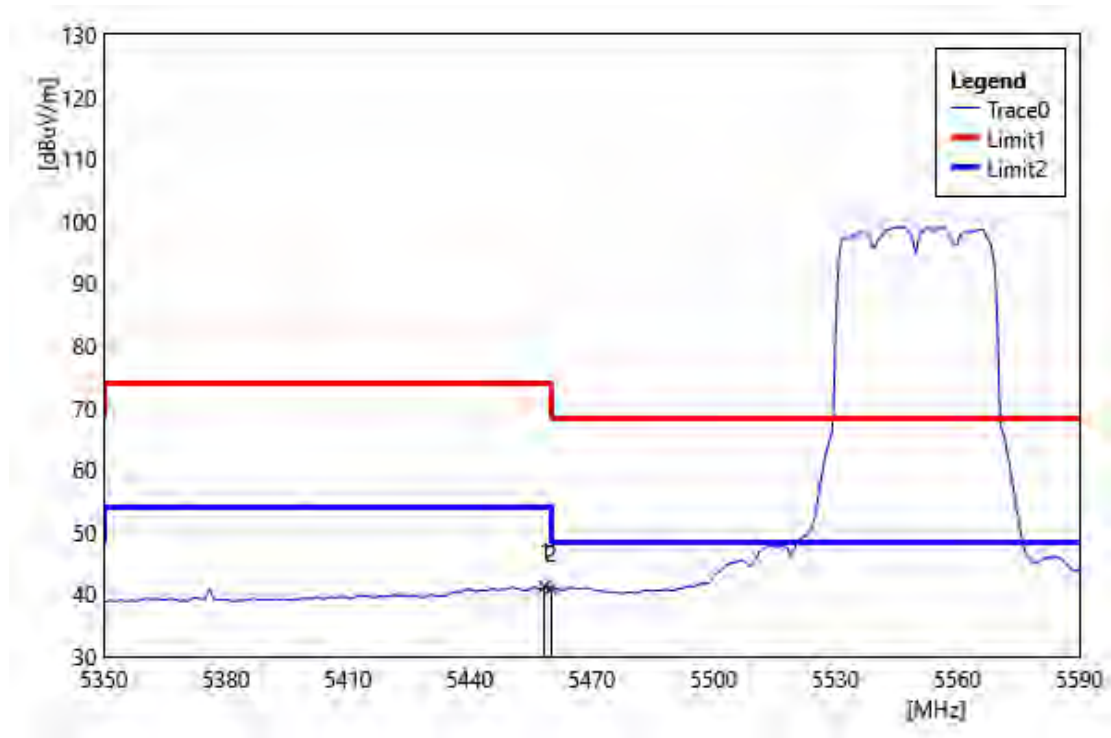


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.48	41.82	-0.57	41.25	54.00	-12.75	AVG
2	5460.00	41.48	-0.57	40.92	54.00	-13.09	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5550 MHz		
Polarization:	Horizontal		
Remark:			

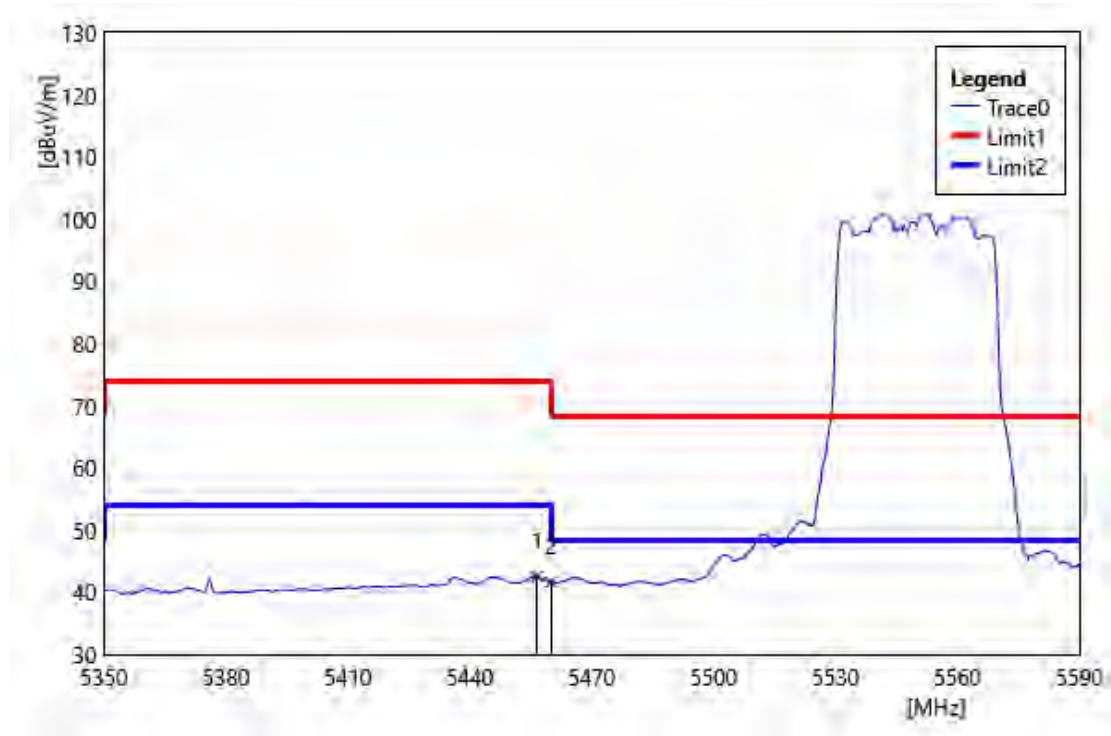


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5456.56	43.14	-0.58	42.56	54.00	-11.44	AVG
2	5460.00	42.21	-0.57	41.64	54.00	-12.36	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5670 MHz		
Polarization:	Vertical		
Remark:			

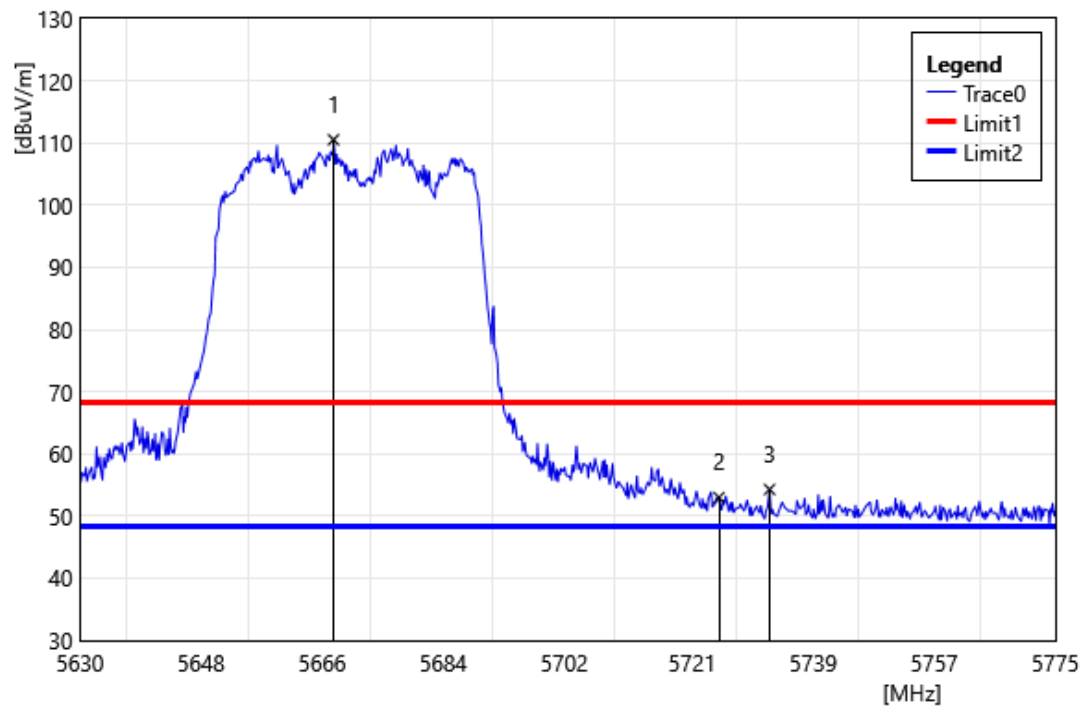


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5667.70	111.15	-0.63	110.52	68.20	42.32	PEAK
2	5725.00	53.31	-0.34	52.97	68.20	-15.23	PEAK
3	5732.52	54.55	-0.27	54.28	68.20	-13.92	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5670 MHz		
Polarization:	Horizontal		
Remark:			

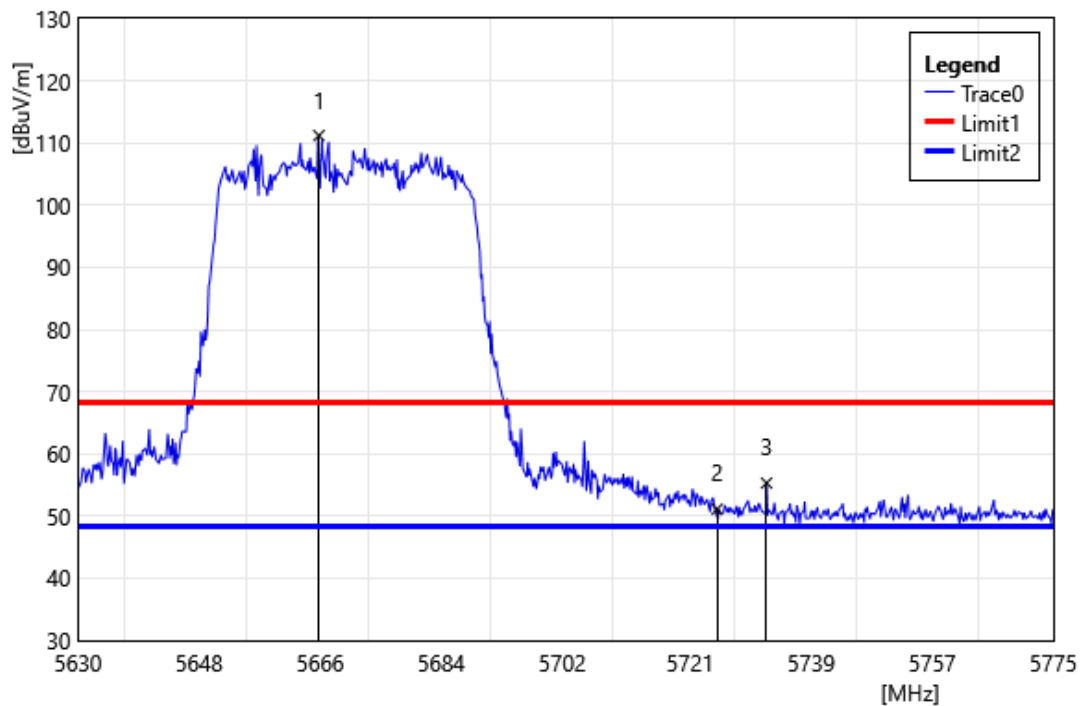


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5665.82	111.83	-0.63	111.20	68.20	43.00	PEAK
2	5725.00	51.45	-0.34	51.11	68.20	-17.09	PEAK
3	5732.37	55.58	-0.27	55.31	68.20	-12.90	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5710 MHz		
Polarization:	Vertical		
Remark:			

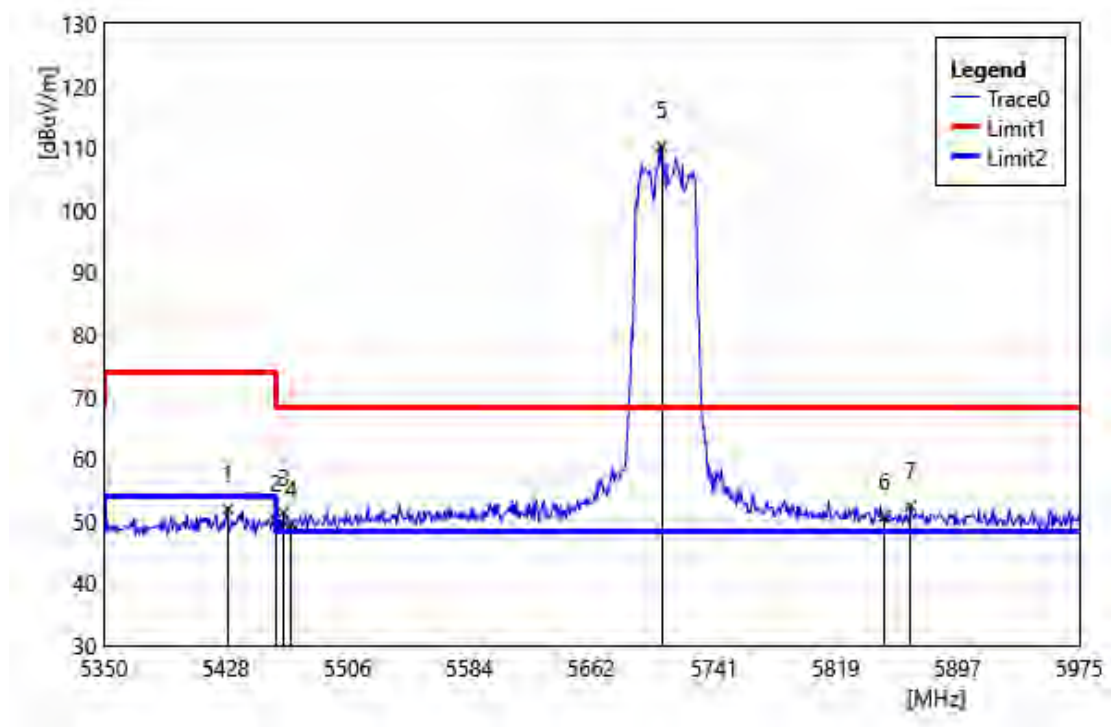


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5429.38	52.70	-0.73	51.97	74.00	-22.03	PEAK
2	5460.00	50.81	-0.57	50.24	74.00	-23.76	PEAK
3	5465.00	51.97	-0.57	51.40	68.20	-16.80	PEAK
4	5470.00	50.03	-0.56	49.47	68.20	-18.73	PEAK
5	5707.50	110.88	-0.53	110.35	68.20	42.15	PEAK
6	5850.00	50.52	0.28	50.80	68.20	-17.40	PEAK
7	5866.88	52.13	0.32	52.45	68.20	-15.75	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5710 MHz		
Polarization:	Horizontal		
Remark:			

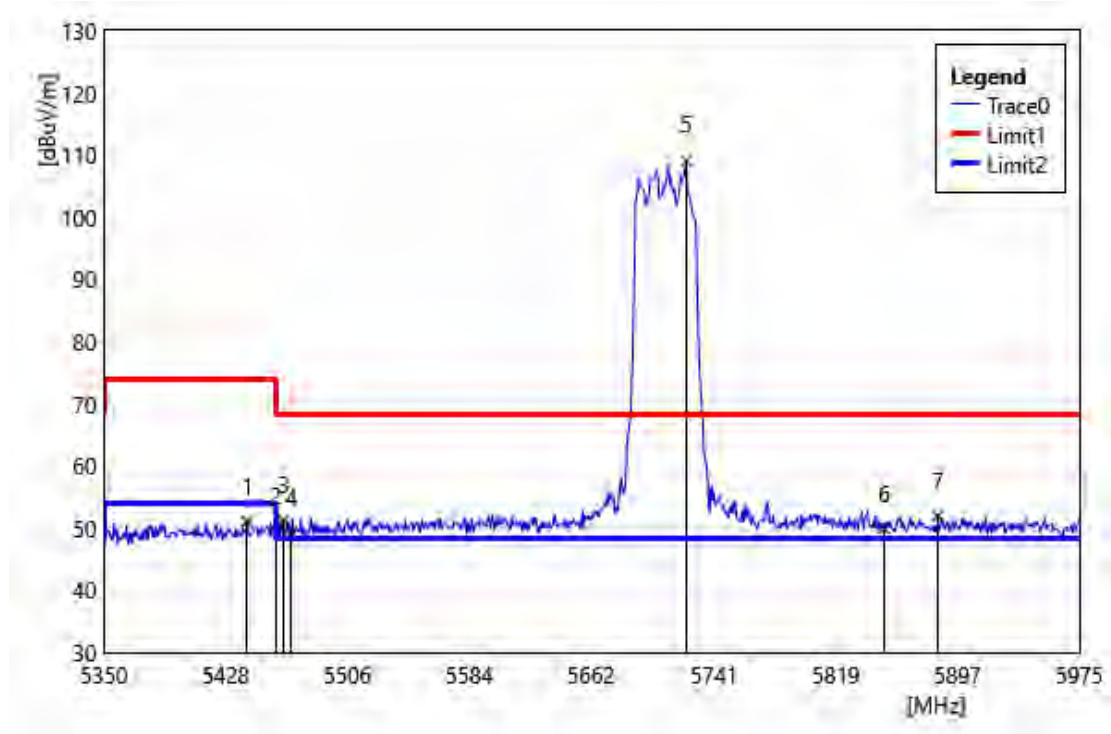


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5441.88	51.69	-0.64	51.05	74.00	-22.95	PEAK
2	5460.00	50.06	-0.57	49.49	74.00	-24.51	PEAK
3	5465.00	51.75	-0.57	51.18	68.20	-17.02	PEAK
4	5470.00	49.79	-0.56	49.23	68.20	-18.97	PEAK
5	5723.13	109.50	-0.36	109.14	68.20	40.94	PEAK
6	5850.00	49.63	0.28	49.91	68.20	-18.29	PEAK
7	5884.38	51.59	0.37	51.96	68.20	-16.24	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5710 MHz		
Polarization:	Vertical		
Remark:			

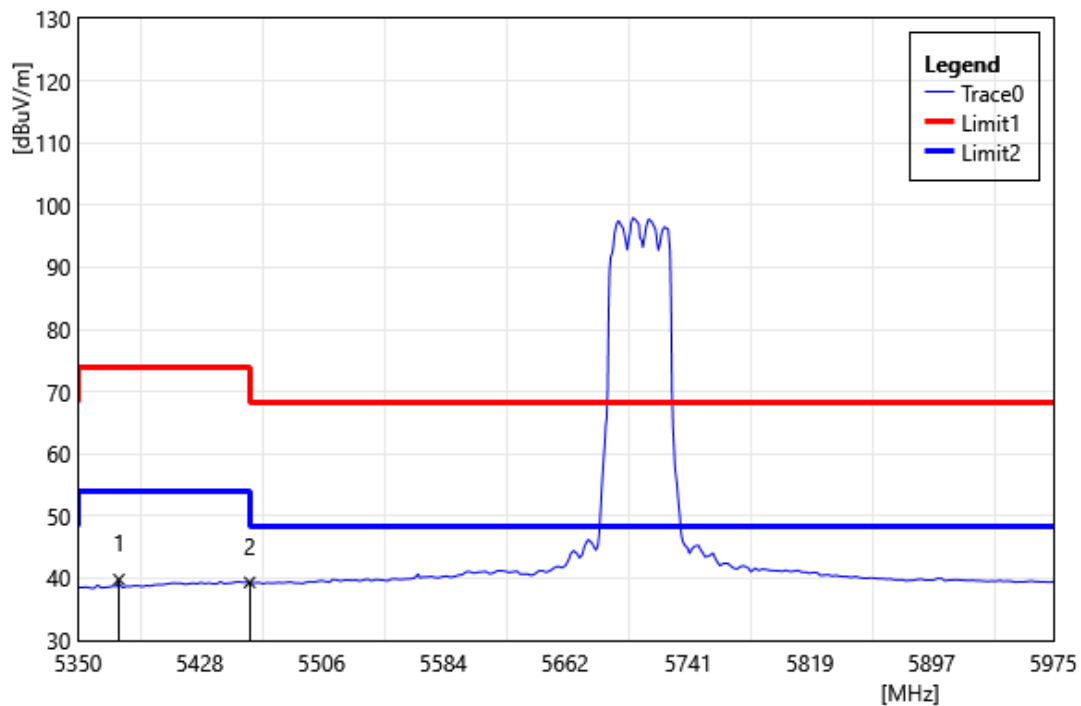


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5376.25	40.91	-1.11	39.80	54.00	-14.20	AVG
2	5460.00	39.90	-0.57	39.33	54.00	-14.67	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5710 MHz		
Polarization:	Horizontal		
Remark:			

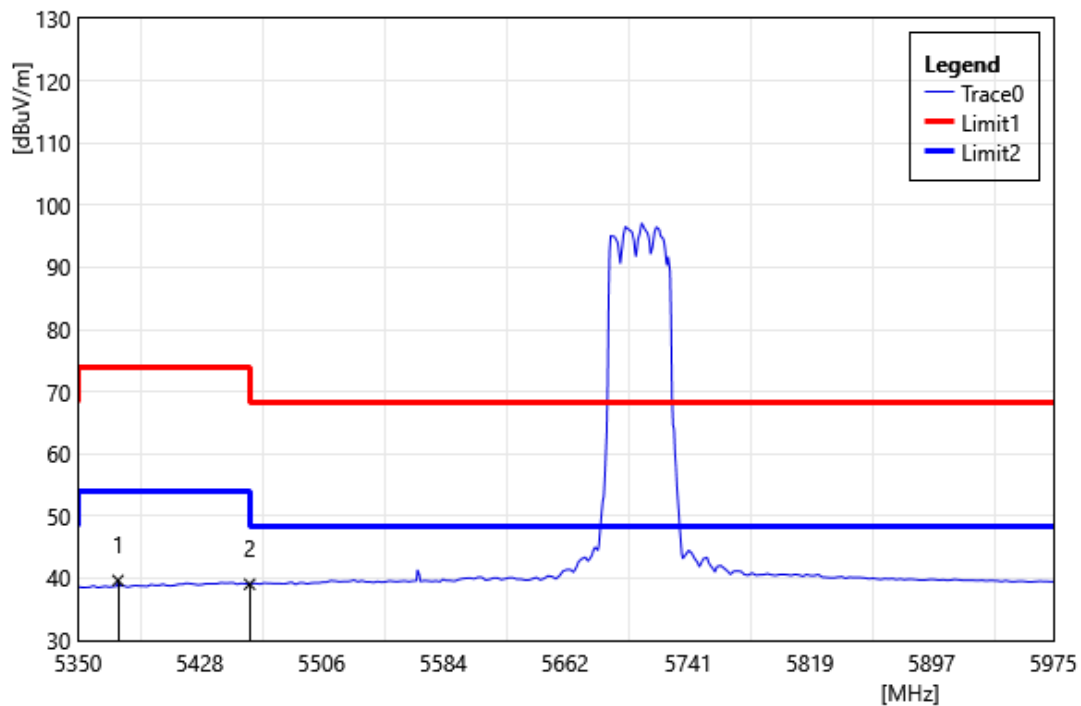


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5375.63	40.76	-1.11	39.65	54.00	-14.35	AVG
2	5460.00	39.60	-0.57	39.03	54.00	-14.97	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5755 MHz		
Polarization:	Vertical		
Remark:			

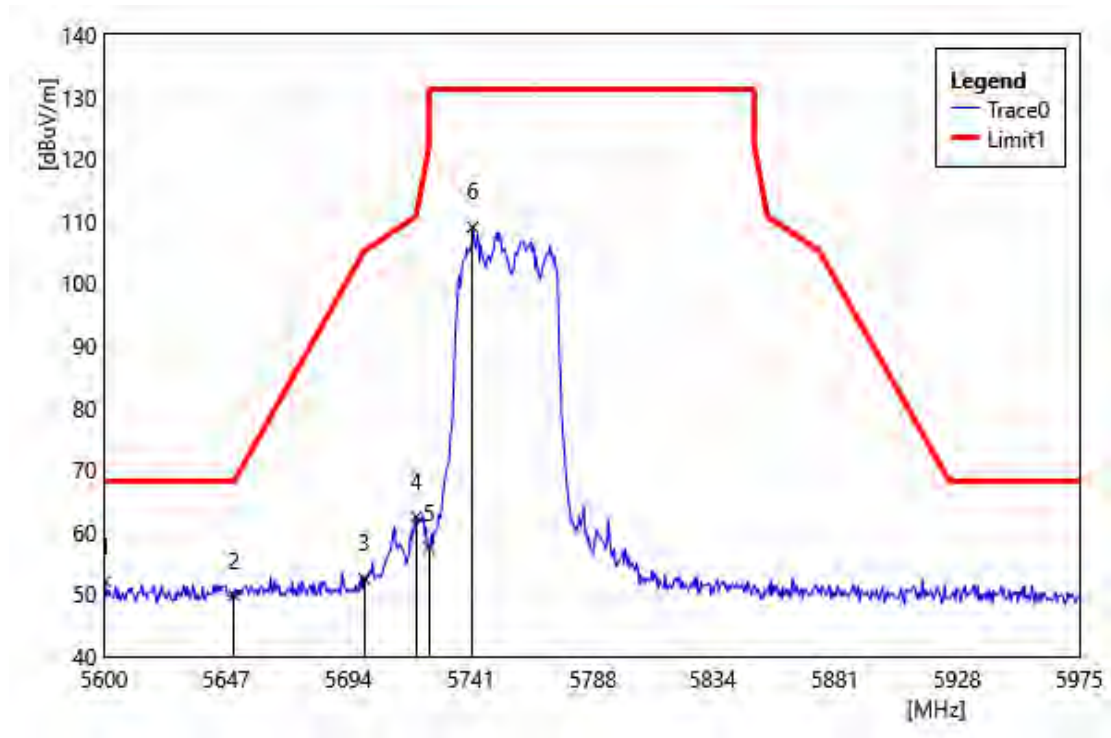


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5600.38	52.66	-0.57	52.09	68.20	-16.11	PEAK
2	5650.00	50.42	-0.64	49.78	68.20	-18.42	PEAK
3	5700.00	53.13	-0.61	52.52	105.20	-52.68	PEAK
4	5720.00	62.87	-0.40	62.47	110.80	-48.33	PEAK
5	5725.00	57.81	-0.34	57.47	122.20	-64.73	PEAK
6	5741.75	109.19	-0.17	109.02	131.20	-22.18	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5755 MHz		
Polarization:	Horizontal		
Remark:			

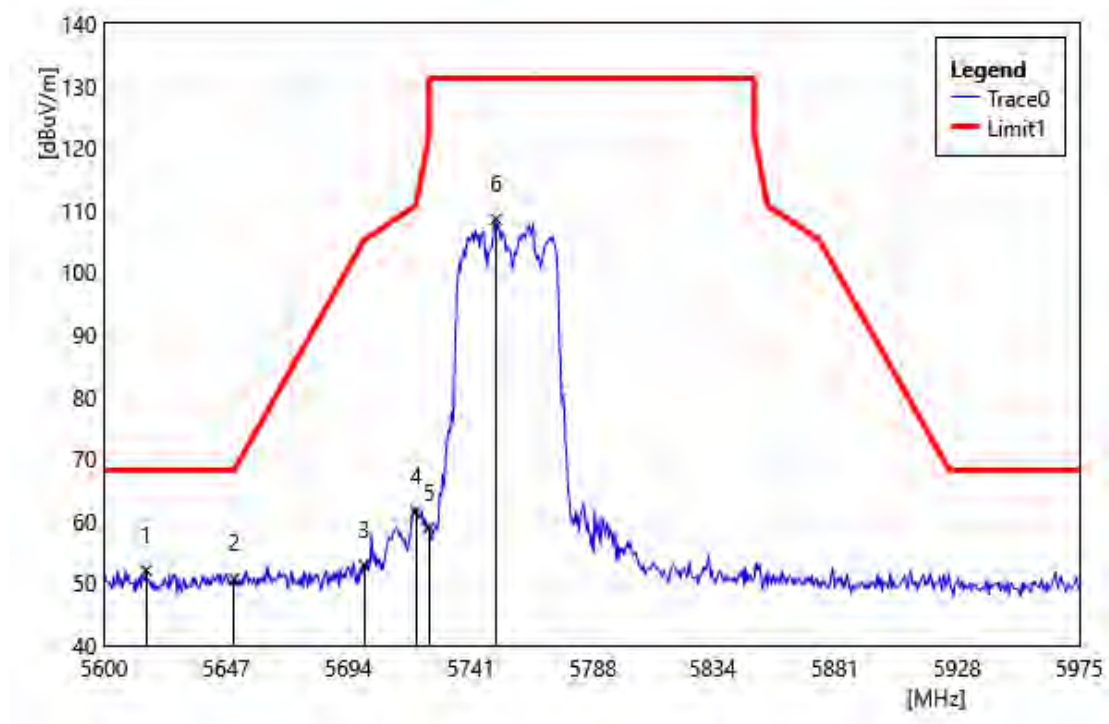


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5616.13	52.68	-0.59	52.09	68.20	-16.11	PEAK
2	5650.00	51.36	-0.64	50.72	68.20	-17.48	PEAK
3	5700.00	53.52	-0.61	52.91	105.20	-52.29	PEAK
4	5720.00	61.93	-0.40	61.53	110.80	-49.27	PEAK
5	5725.00	59.31	-0.34	58.97	122.20	-63.23	PEAK
6	5750.75	108.62	-0.08	108.54	131.20	-22.66	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5795 MHz		
Polarization:	Vertical		
Remark:			

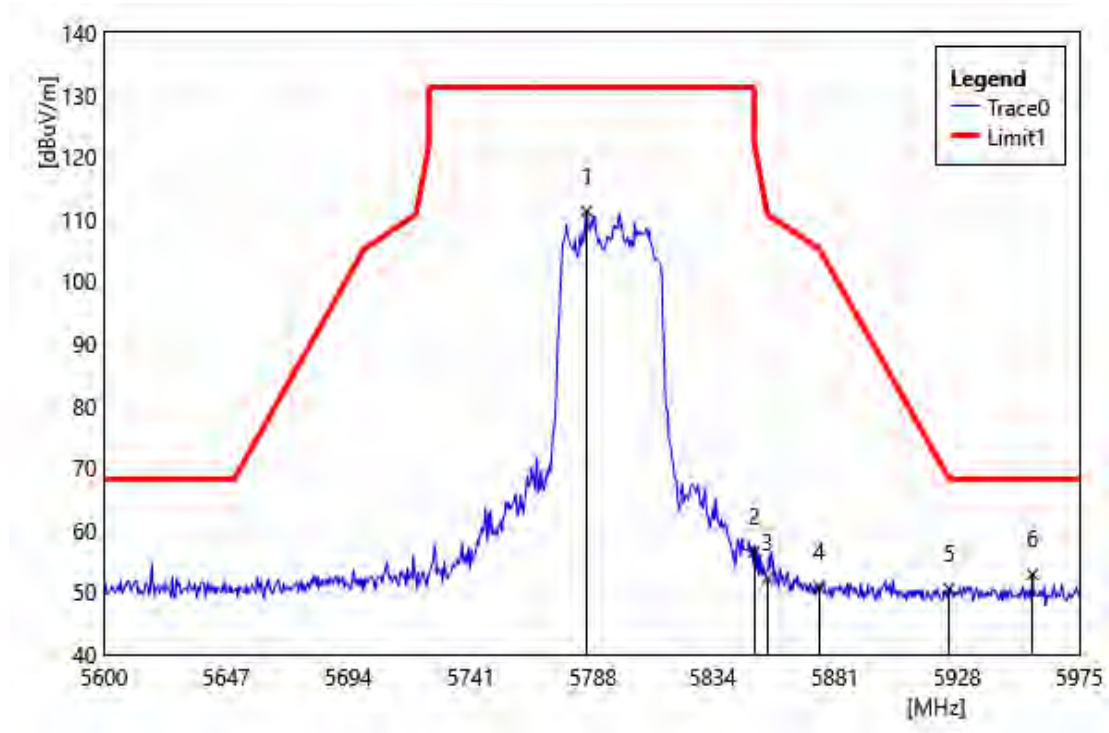


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5785.63	111.17	0.08	111.25	131.20	-19.95	PEAK
2	5850.00	56.23	0.28	56.51	122.20	-65.69	PEAK
3	5855.00	51.92	0.29	52.21	110.80	-58.59	PEAK
4	5875.00	50.51	0.34	50.85	105.20	-54.35	PEAK
5	5925.00	50.25	0.28	50.53	68.20	-17.67	PEAK
6	5957.00	52.72	0.16	52.88	68.20	-15.32	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5795 MHz		
Polarization:	Horizontal		
Remark:			

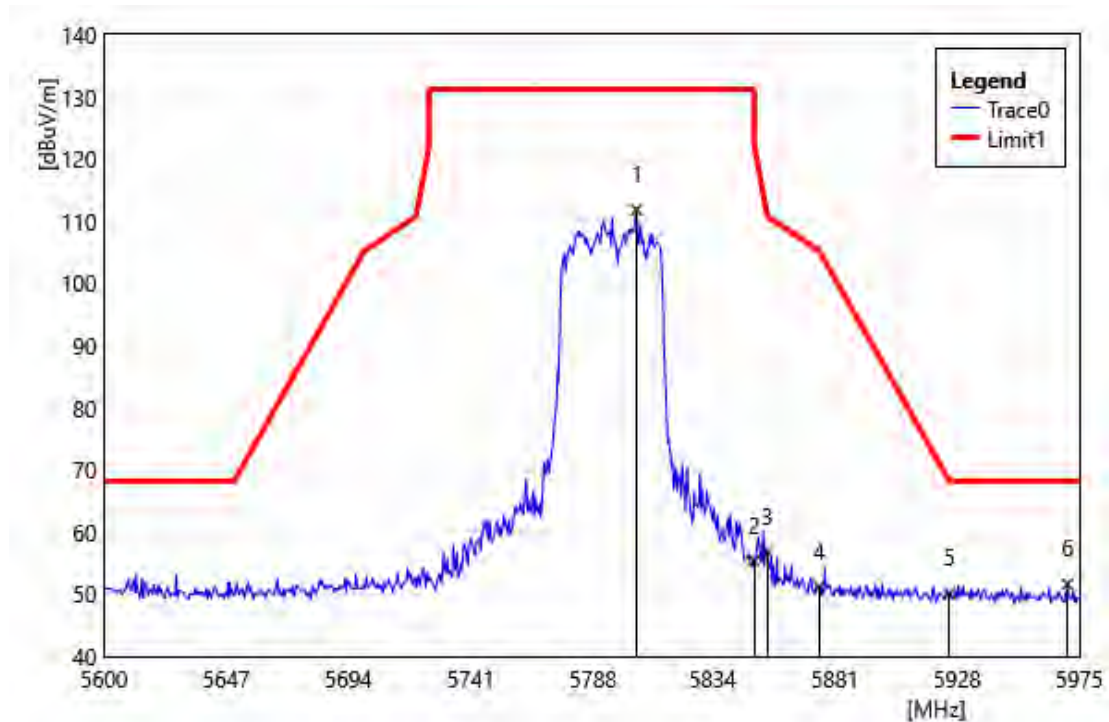


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5804.75	111.68	0.16	111.84	131.20	-19.36	PEAK
2	5850.00	55.11	0.28	55.39	122.20	-66.81	PEAK
3	5855.00	56.42	0.29	56.71	110.80	-54.09	PEAK
4	5875.00	50.88	0.34	51.22	105.20	-53.98	PEAK
5	5925.00	49.90	0.28	50.18	68.20	-18.02	PEAK
6	5970.50	51.42	0.19	51.61	68.20	-16.59	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5210 MHz		
Polarization:	Vertical		
Remark:			

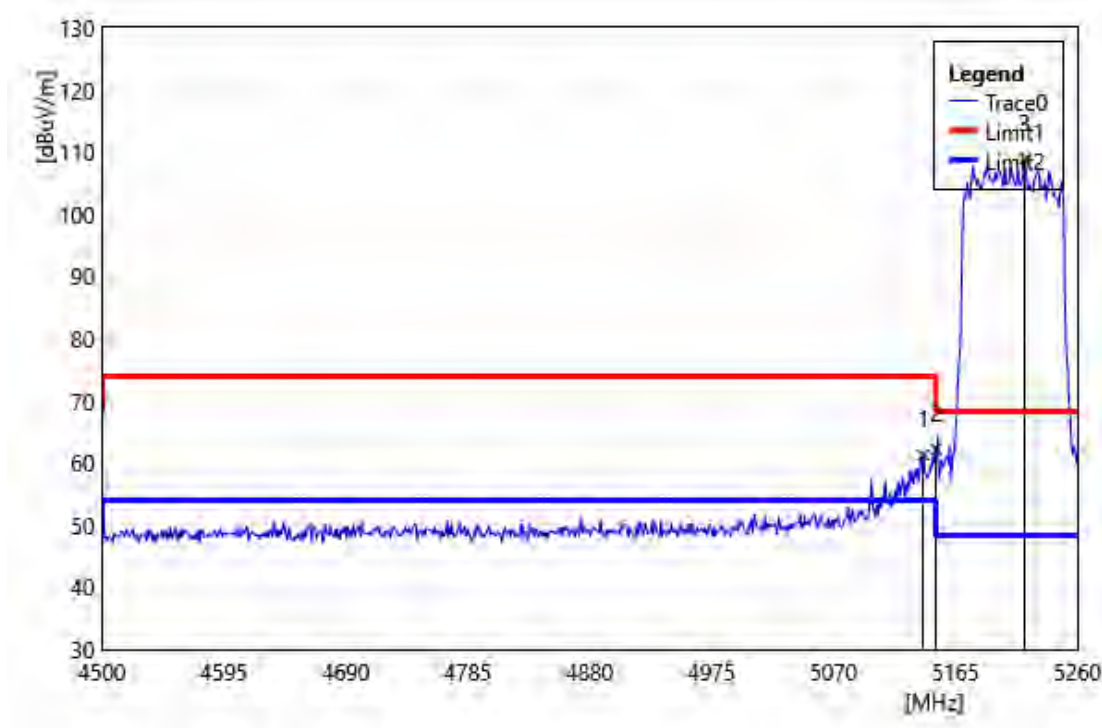


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5139.92	62.14	-0.90	61.24	74.00	-12.76	PEAK
2	5150.00	63.11	-0.91	62.20	74.00	-11.80	PEAK
3	5218.96	110.13	-1.29	108.84	68.20	40.64	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5210 MHz		
Polarization:	Horizontal		
Remark:			

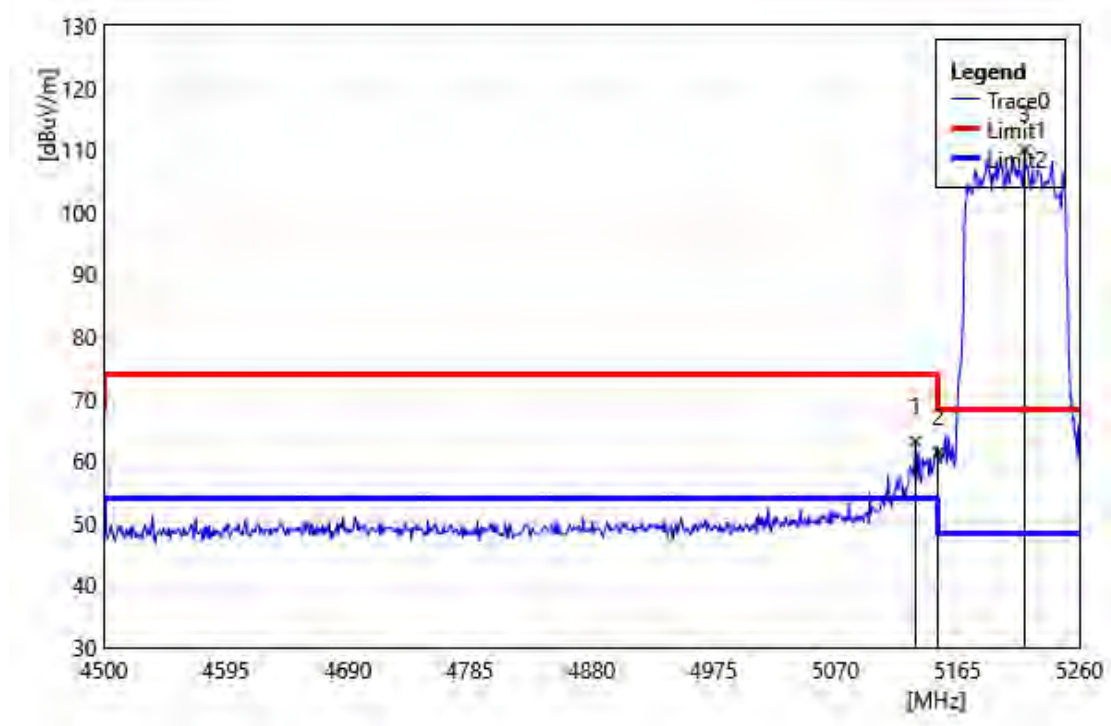


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5132.32	64.02	-0.89	63.13	74.00	-10.87	PEAK
2	5150.00	62.26	-0.91	61.35	74.00	-12.65	PEAK
3	5217.44	111.30	-1.27	110.03	68.20	41.83	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5210 MHz		
Polarization:	Vertical		
Remark:			

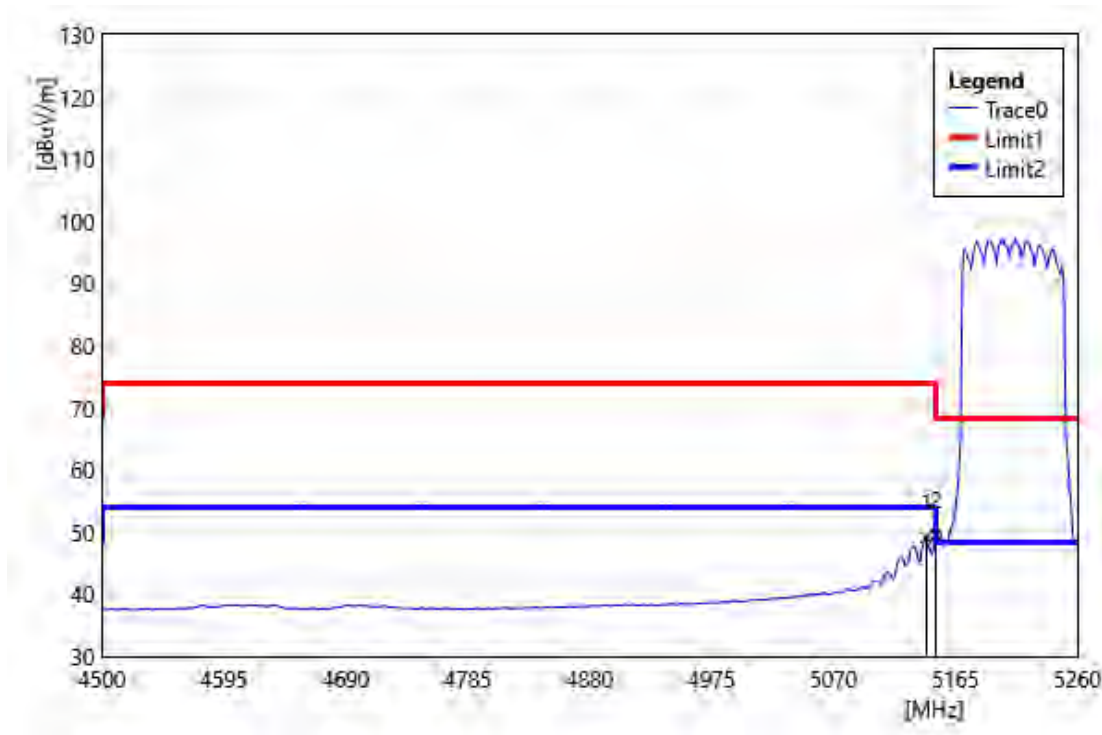


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5142.20	50.03	-0.90	49.13	54.00	-4.87	AVG
2	5150.00	50.43	-0.91	49.52	54.00	-4.48	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5210 MHz		
Polarization:	Horizontal		
Remark:			

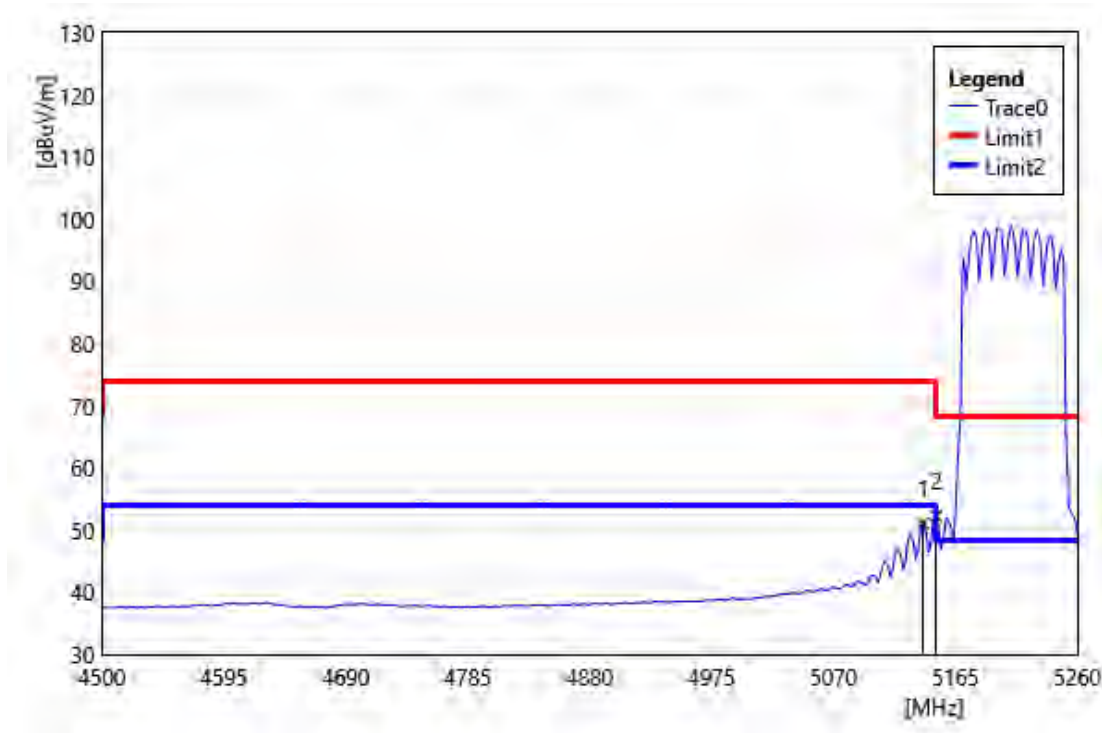


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5139.92	51.94	-0.90	51.04	54.00	-2.96	AVG
2	5150.00	53.17	-0.91	52.26	54.00	-1.74	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5290 MHz		
Polarization:	Vertical		
Remark:			

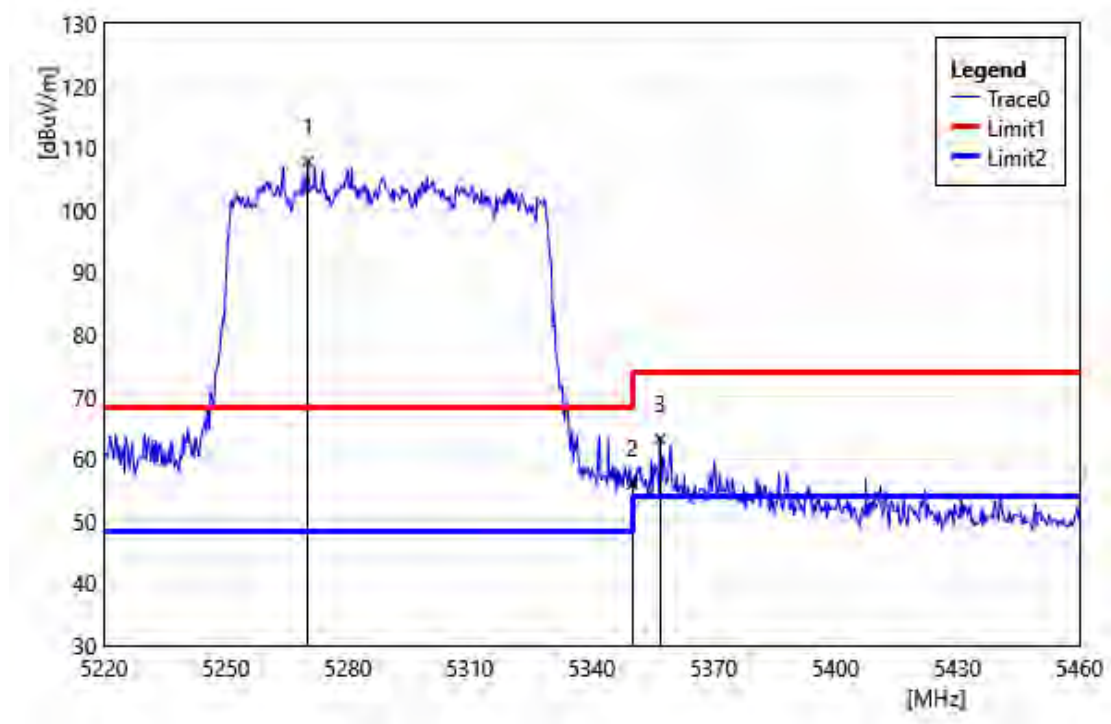


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5270.16	109.32	-1.56	107.76	68.20	39.56	PEAK
2	5350.00	57.20	-1.29	55.91	74.00	-18.09	PEAK
3	5356.80	64.49	-1.24	63.25	74.00	-10.75	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5290 MHz		
Polarization:	Horizontal		
Remark:			

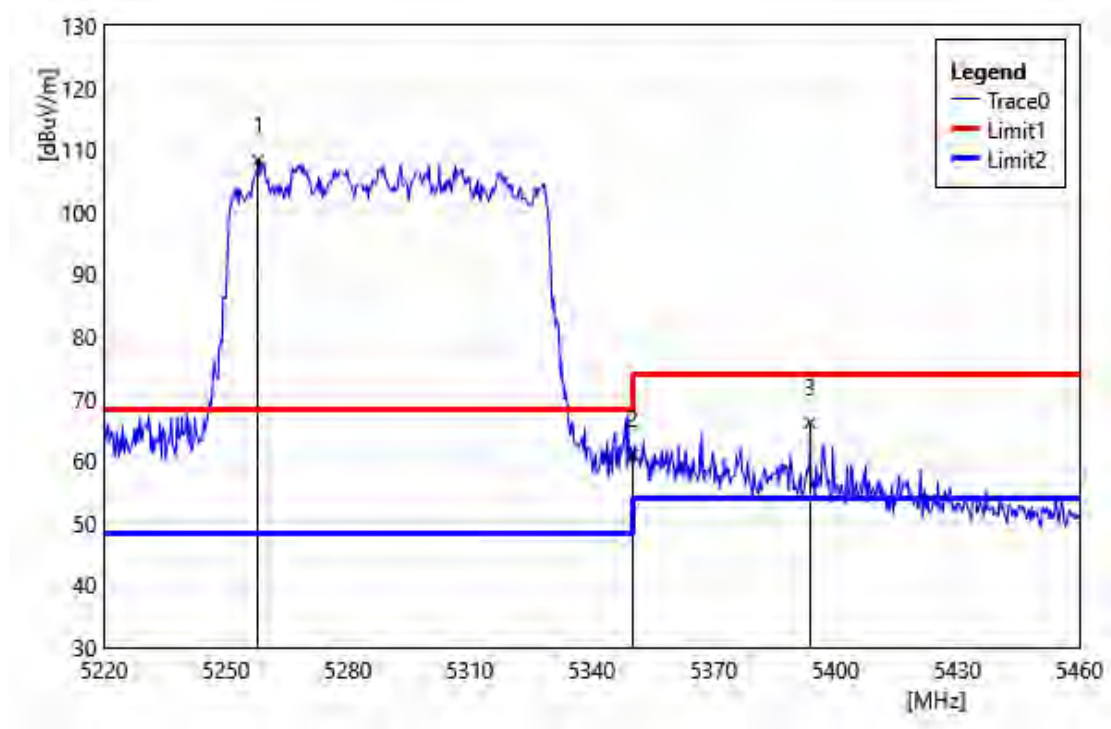


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5257.92	109.79	-1.52	108.27	68.20	40.07	PEAK
2	5350.00	62.35	-1.29	61.05	74.00	-12.95	PEAK
3	5393.76	67.09	-0.98	66.11	74.00	-7.89	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5290 MHz		
Polarization:	Vertical		
Remark:			

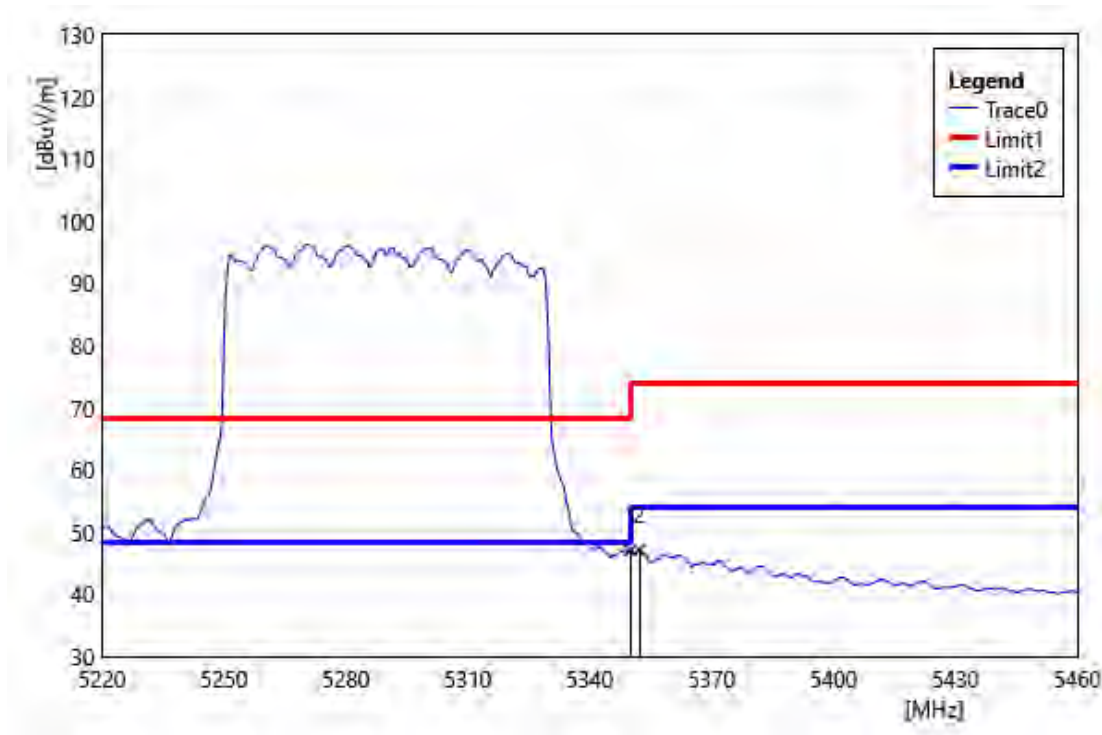


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	48.35	-1.29	47.06	54.00	-6.94	AVG
2	5352.24	48.38	-1.28	47.10	54.00	-6.91	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5290 MHz		
Polarization:	Horizontal		
Remark:			

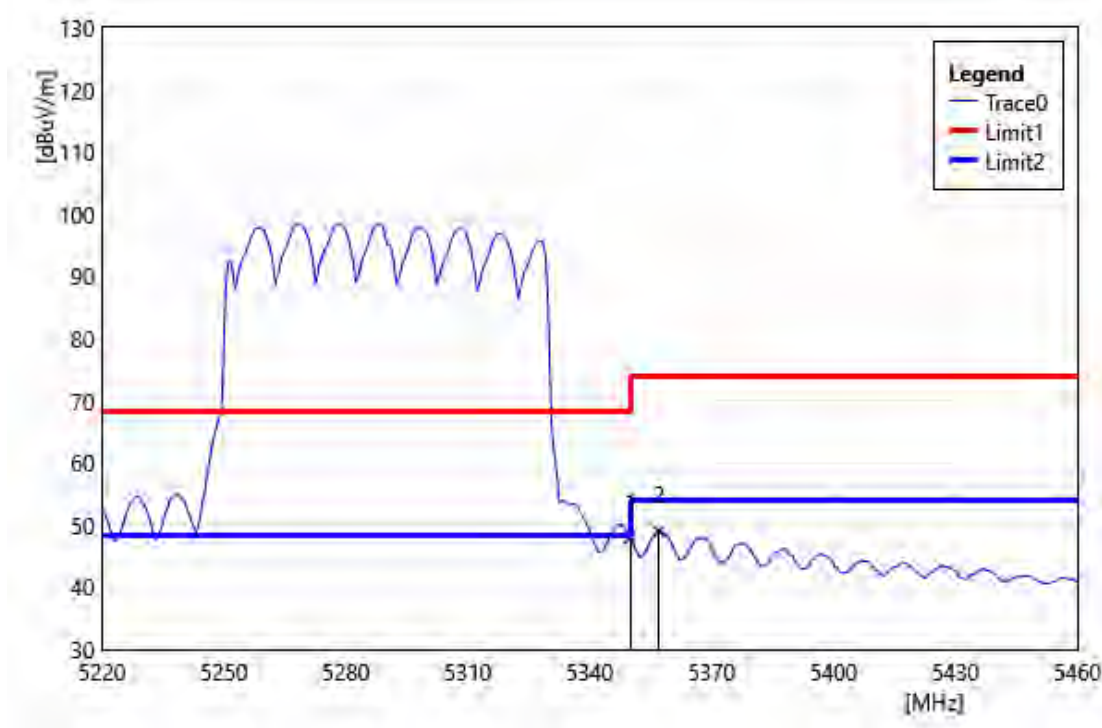


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	49.30	-1.29	48.01	54.00	-5.99	AVG
2	5357.04	50.27	-1.24	49.03	54.00	-4.97	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5530 MHz		
Polarization:	Vertical		
Remark:			

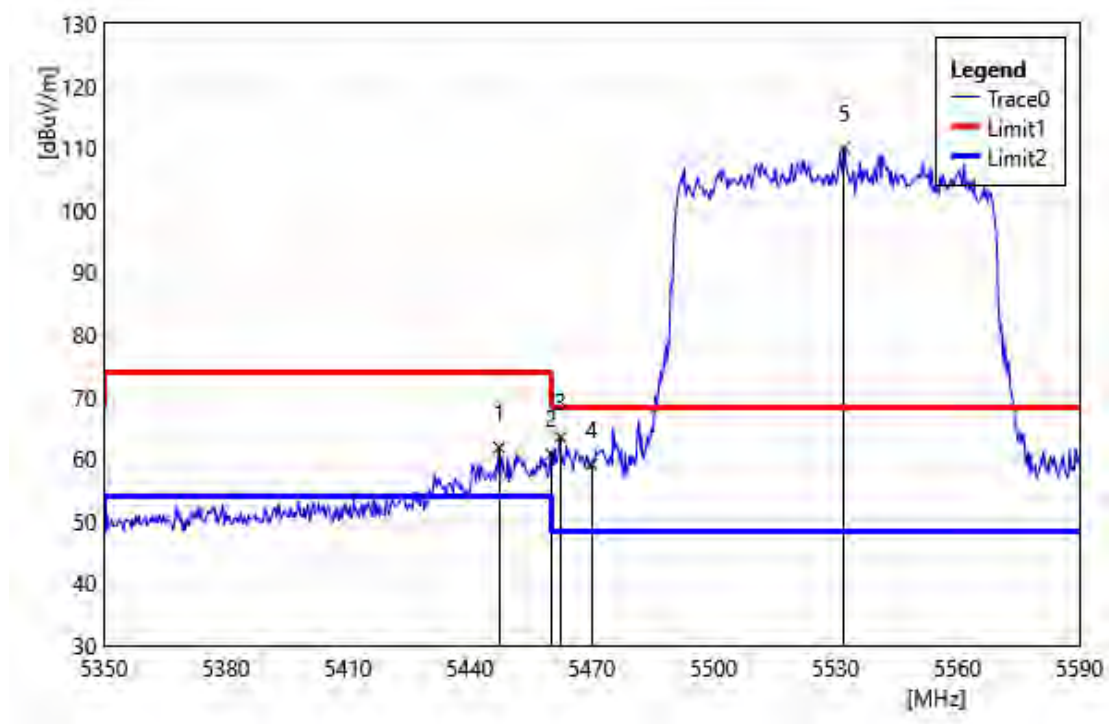


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5447.20	62.41	-0.60	61.81	74.00	-12.19	PEAK
2	5460.00	61.36	-0.57	60.79	74.00	-13.21	PEAK
3	5462.32	64.11	-0.57	63.55	68.20	-4.66	PEAK
4	5470.00	59.69	-0.56	59.13	68.20	-9.07	PEAK
5	5532.16	110.49	-0.51	109.98	68.20	41.78	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5530 MHz		
Polarization:	Horizontal		
Remark:			

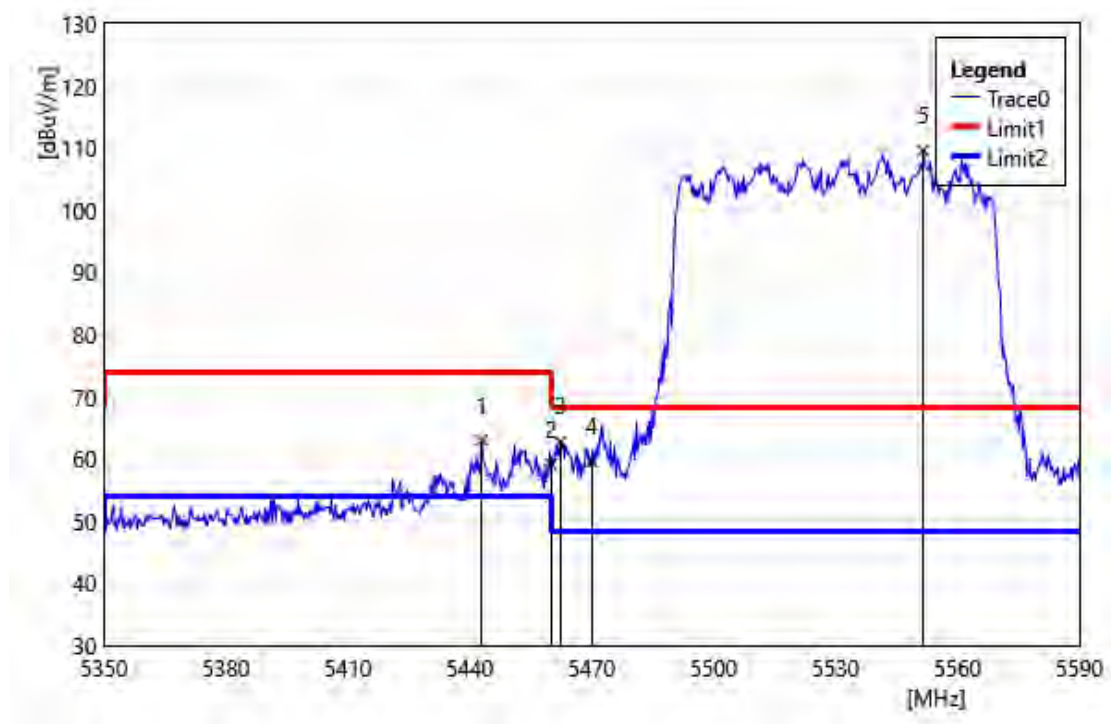


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5442.88	63.62	-0.63	62.99	74.00	-11.01	PEAK
2	5460.00	59.70	-0.57	59.13	74.00	-14.87	PEAK
3	5462.32	63.32	-0.57	62.75	68.20	-5.45	PEAK
4	5470.00	60.15	-0.56	59.59	68.20	-8.61	PEAK
5	5551.60	110.11	-0.50	109.61	68.20	41.41	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5530 MHz		
Polarization:	Vertical		
Remark:			

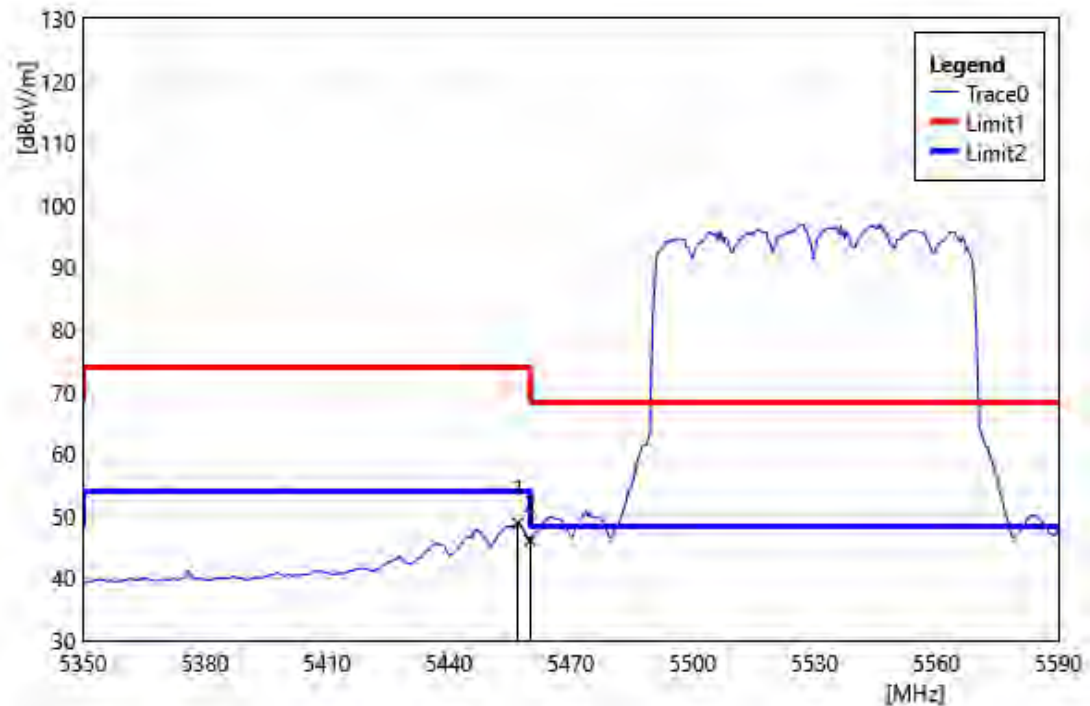


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5457.04	49.46	-0.58	48.88	54.00	-5.13	AVG
2	5460.00	46.62	-0.57	46.05	54.00	-7.95	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5530 MHz		
Polarization:	Horizontal		
Remark:			

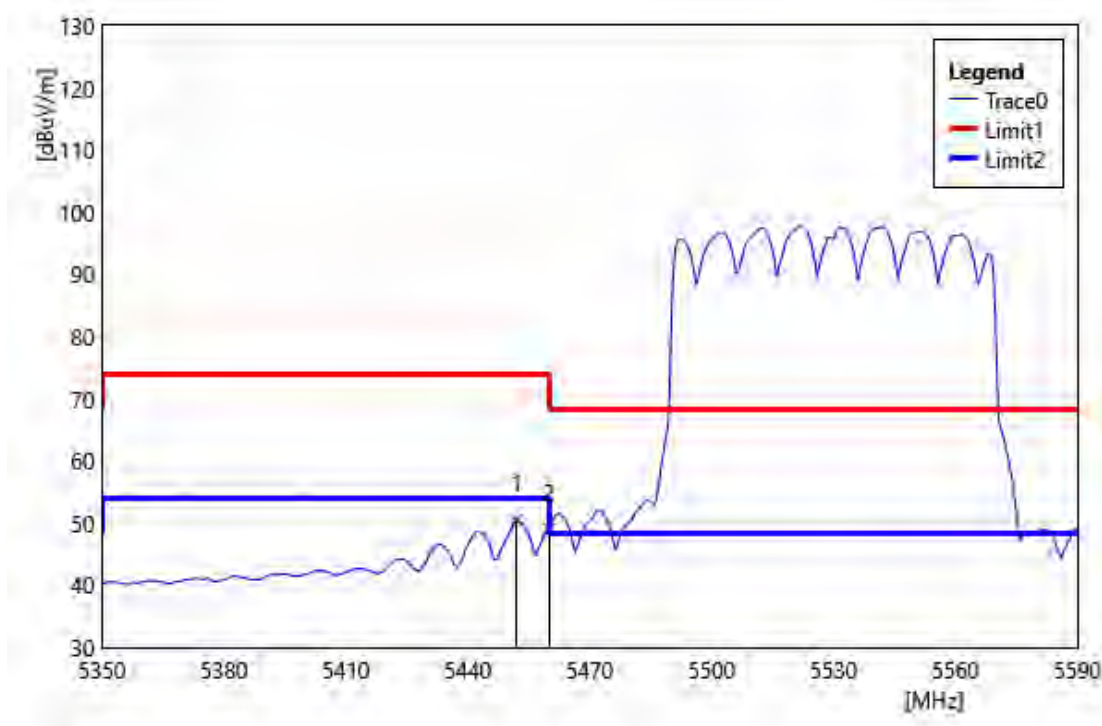


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5452.00	51.09	-0.58	50.51	54.00	-3.49	AVG
2	5460.00	49.70	-0.57	49.13	54.00	-4.87	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5610 MHz		
Polarization:	Vertical		
Remark:			

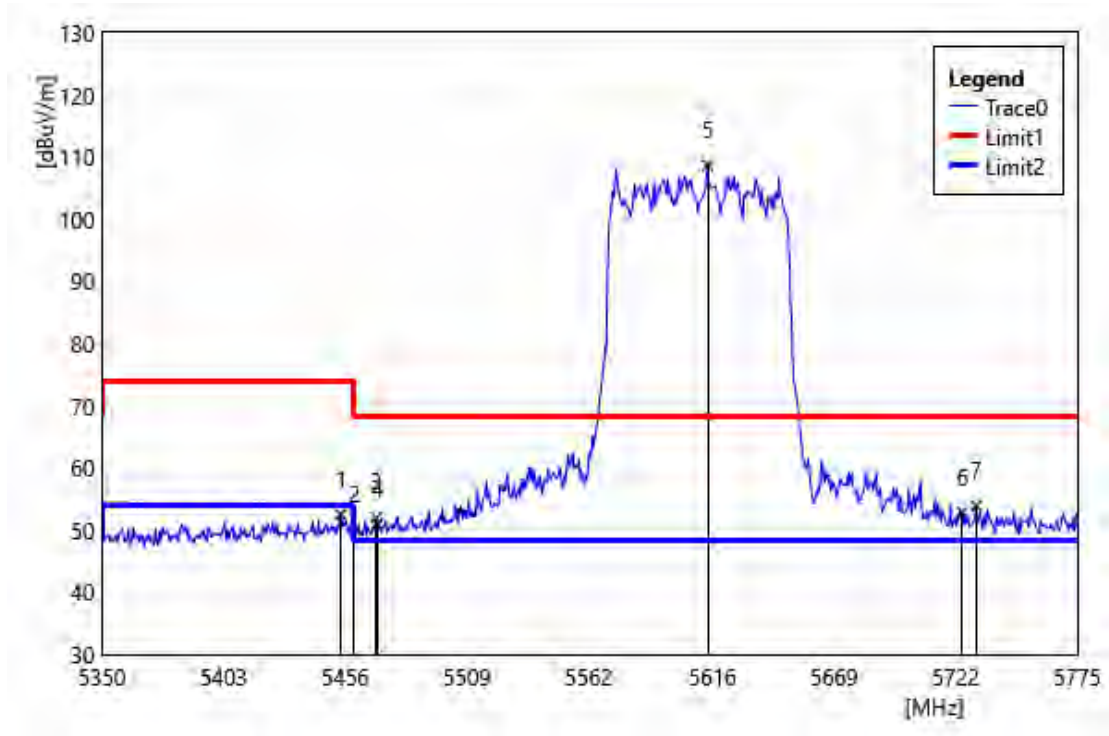


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5454.13	53.08	-0.58	52.50	74.00	-21.50	PEAK
2	5460.00	50.65	-0.57	50.08	74.00	-23.92	PEAK
3	5469.43	52.57	-0.56	52.01	68.20	-16.19	PEAK
4	5470.00	51.60	-0.56	51.04	68.20	-17.16	PEAK
5	5613.93	109.24	-0.59	108.65	68.20	40.45	PEAK
6	5725.00	53.17	-0.34	52.83	68.20	-15.37	PEAK
7	5730.80	54.18	-0.28	53.90	68.20	-14.30	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5610 MHz		
Polarization:	Horizontal		
Remark:			

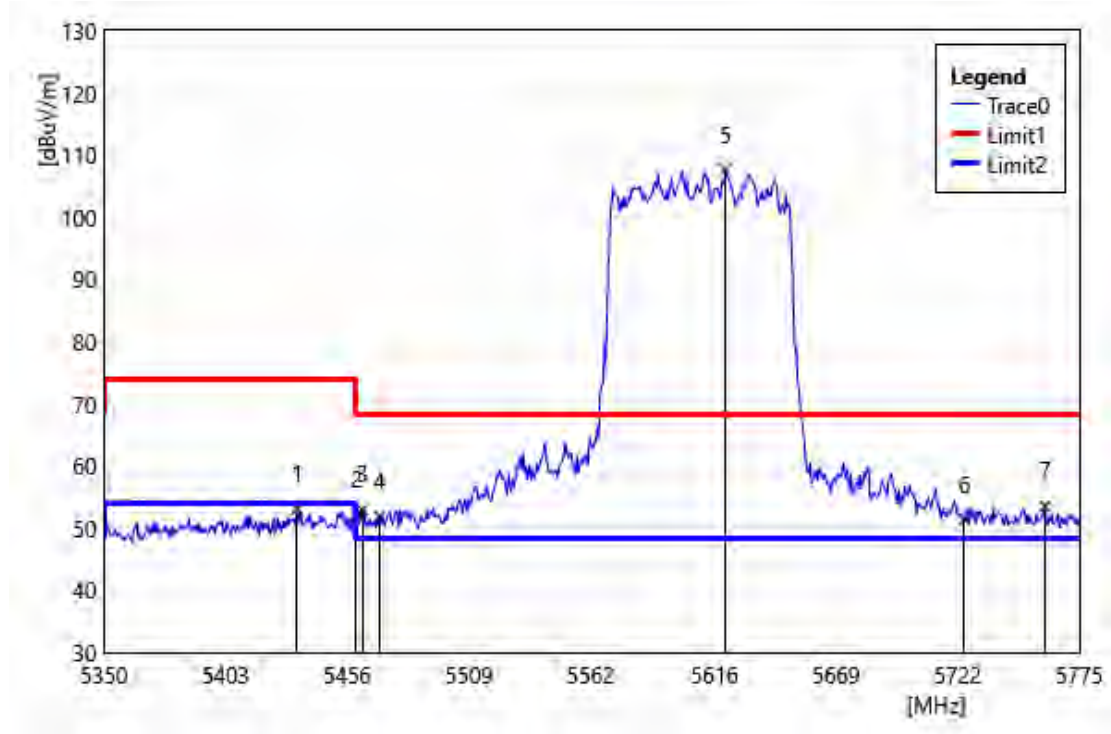


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5434.15	53.75	-0.70	53.05	74.00	-20.95	PEAK
2	5460.00	52.75	-0.57	52.18	74.00	-21.82	PEAK
3	5462.63	53.47	-0.57	52.90	68.20	-15.30	PEAK
4	5470.00	52.43	-0.56	51.87	68.20	-16.33	PEAK
5	5620.73	108.21	-0.60	107.61	68.20	39.41	PEAK
6	5725.00	51.72	-0.34	51.38	68.20	-16.82	PEAK
7	5760.13	53.58	-0.03	53.56	68.20	-14.65	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5610 MHz		
Polarization:	Vertical		
Remark:			

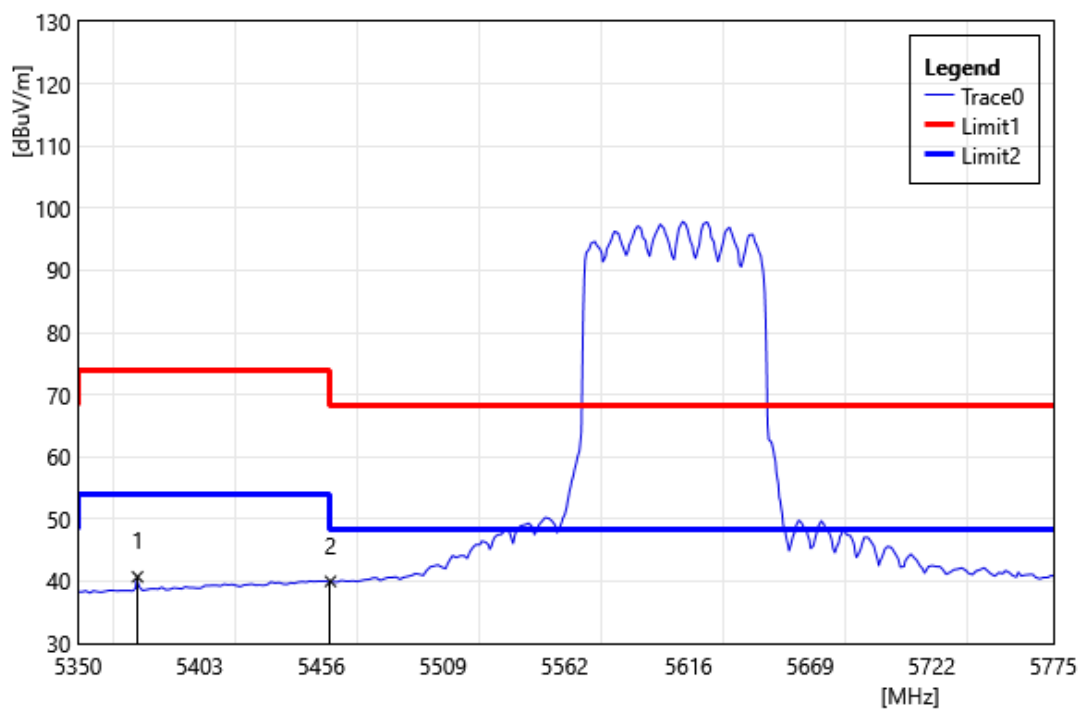


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5375.93	41.81	-1.11	40.70	54.00	-13.30	AVG
2	5460.00	40.54	-0.57	39.97	54.00	-14.03	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5610 MHz		
Polarization:	Horizontal		
Remark:			

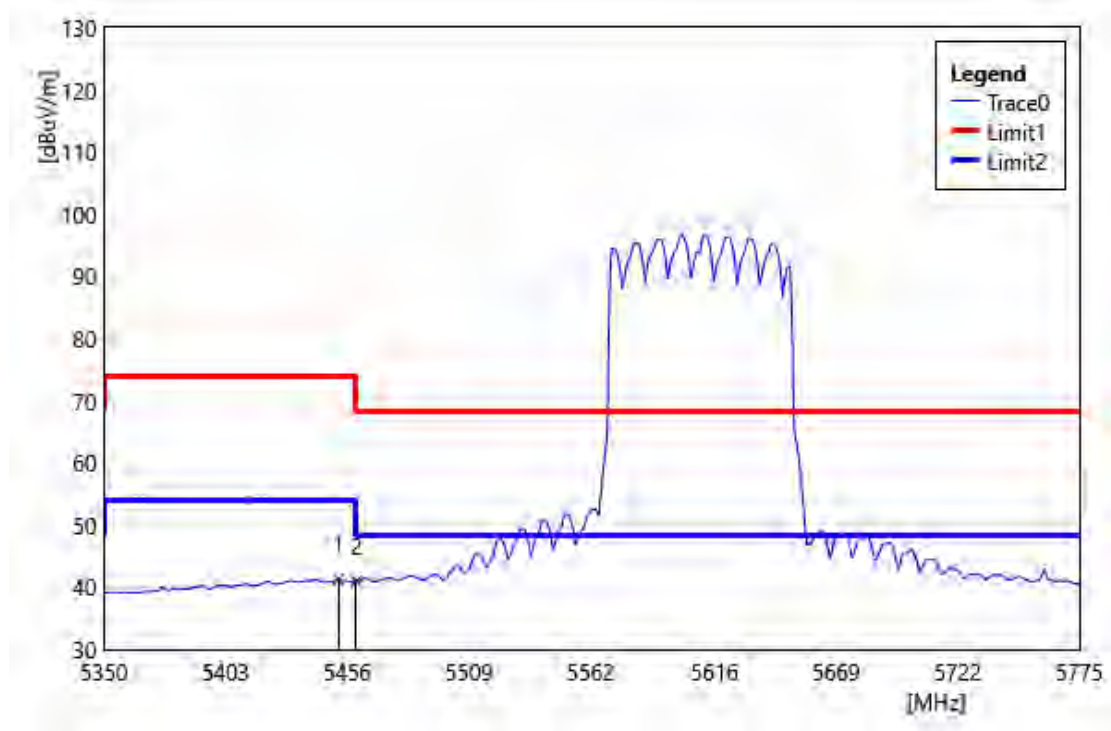


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5452.00	41.83	-0.58	41.25	54.00	-12.75	AVG
2	5460.00	41.55	-0.57	40.98	54.00	-13.02	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5690 MHz		
Polarization:	Vertical		
Remark:			

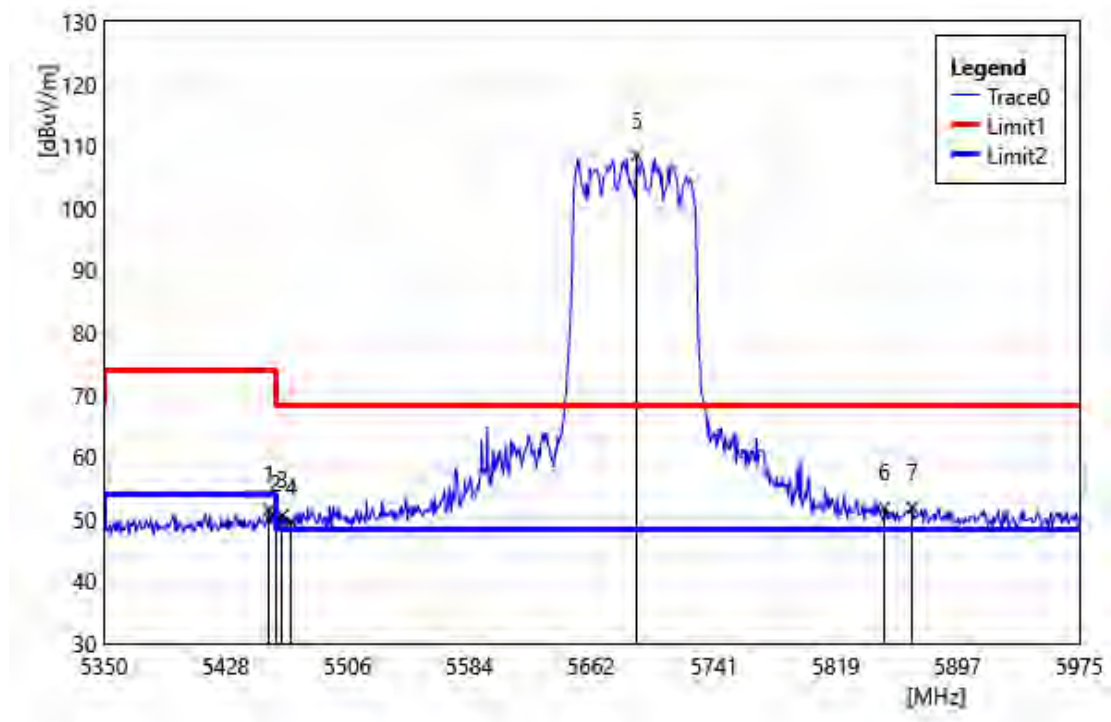


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5455.63	52.12	-0.58	51.54	74.00	-22.46	PEAK
2	5460.00	50.51	-0.57	49.94	74.00	-24.06	PEAK
3	5464.38	51.18	-0.57	50.61	68.20	-17.59	PEAK
4	5470.00	50.13	-0.56	49.57	68.20	-18.63	PEAK
5	5691.25	109.08	-0.62	108.46	68.20	40.26	PEAK
6	5850.00	51.50	0.28	51.78	68.20	-16.42	PEAK
7	5868.13	51.53	0.33	51.86	68.20	-16.34	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5690 MHz		
Polarization:	Horizontal		
Remark:			

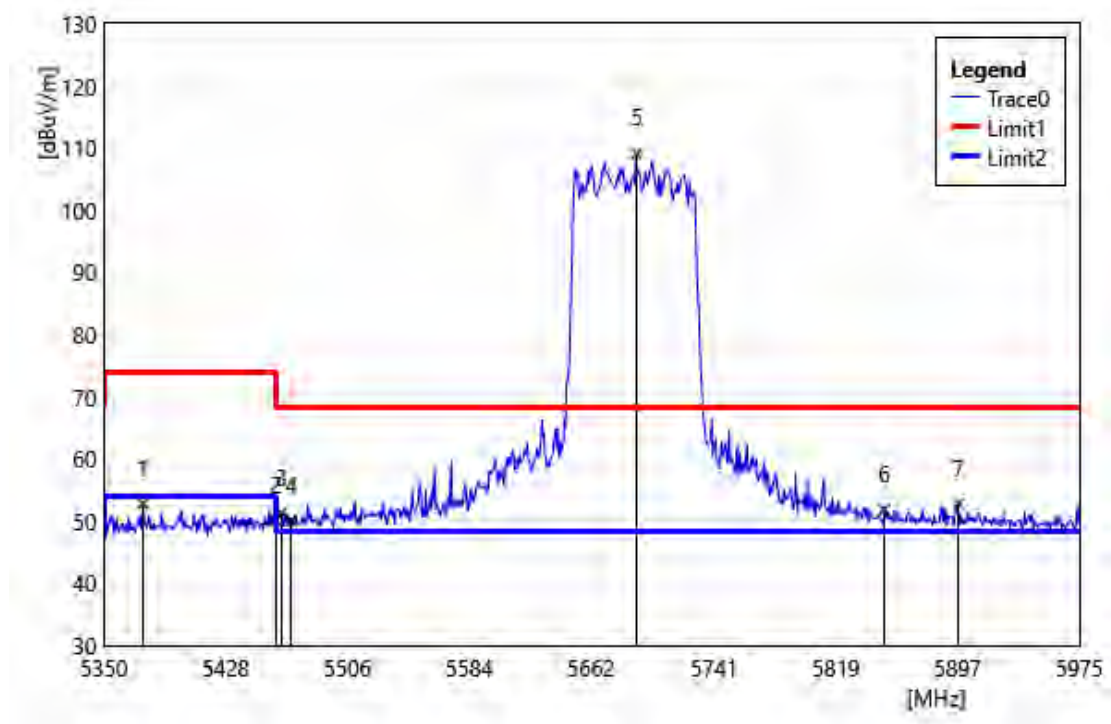


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5375.00	53.90	-1.12	52.78	74.00	-21.22	PEAK
2	5460.00	50.68	-0.57	50.11	74.00	-23.89	PEAK
3	5463.75	51.88	-0.57	51.31	68.20	-16.90	PEAK
4	5470.00	50.64	-0.56	50.08	68.20	-18.12	PEAK
5	5691.25	109.75	-0.62	109.13	68.20	40.93	PEAK
6	5850.00	51.56	0.28	51.84	68.20	-16.36	PEAK
7	5897.50	52.39	0.40	52.79	68.20	-15.41	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5690 MHz		
Polarization:	Vertical		
Remark:			

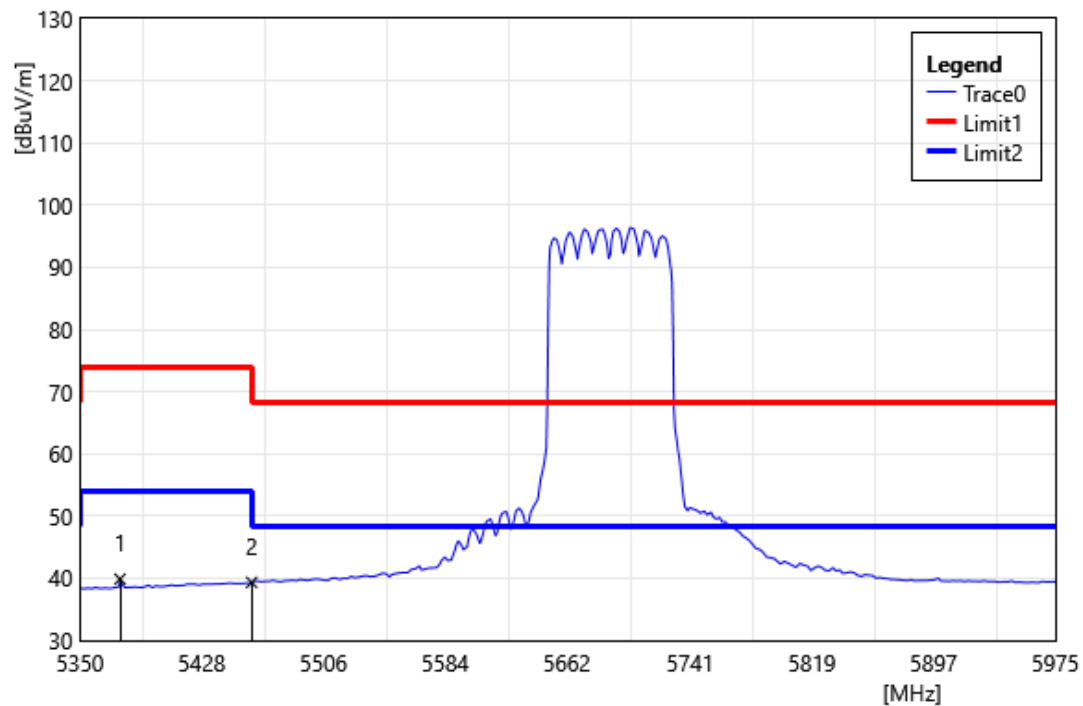


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5375.63	40.98	-1.11	39.87	54.00	-14.13	AVG
2	5460.00	39.90	-0.57	39.33	54.00	-14.67	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5690 MHz		
Polarization:	Horizontal		
Remark:			

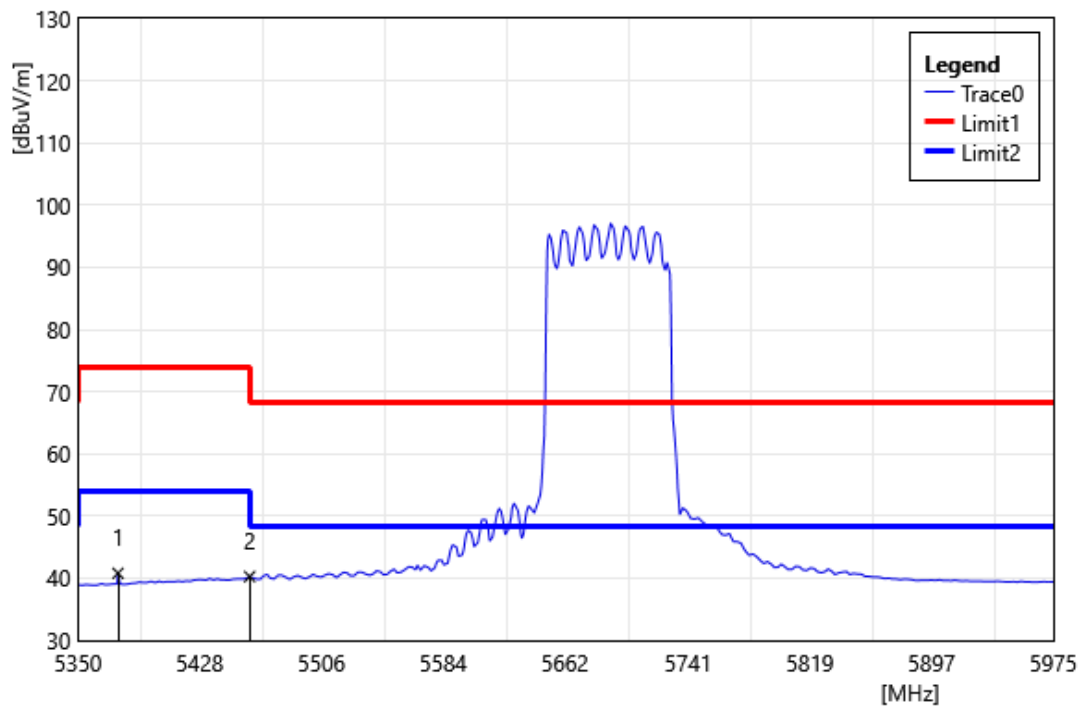


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5375.63	41.91	-1.11	40.80	54.00	-13.20	AVG
2	5460.00	40.84	-0.57	40.27	54.00	-13.73	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5775 MHz		
Polarization:	Vertical		
Remark:			

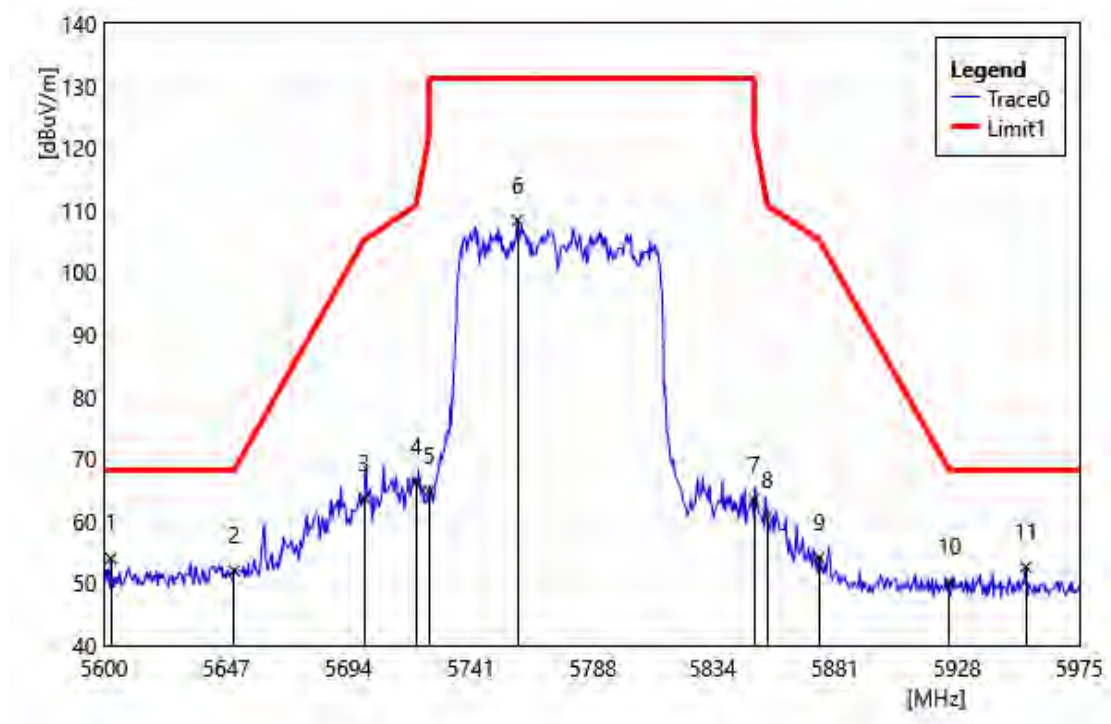

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5602.63	54.55	-0.57	53.98	68.20	-14.22	PEAK
2	5650.00	52.63	-0.64	51.99	68.20	-16.21	PEAK
3	5700.00	64.32	-0.61	63.71	105.20	-41.49	PEAK
4	5720.00	66.63	-0.40	66.23	110.80	-44.57	PEAK
5	5725.00	65.13	-0.34	64.79	122.20	-57.41	PEAK
6	5759.00	108.44	-0.04	108.40	131.20	-22.80	PEAK
7	5850.00	63.15	0.28	63.43	122.20	-58.77	PEAK
8	5855.00	60.61	0.29	60.90	110.80	-49.90	PEAK
9	5875.00	53.78	0.34	54.12	105.20	-51.08	PEAK
10	5925.00	49.86	0.28	50.14	68.20	-18.06	PEAK
11	5954.38	52.45	0.15	52.60	68.20	-15.60	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5775 MHz		
Polarization:	Horizontal		
Remark:			

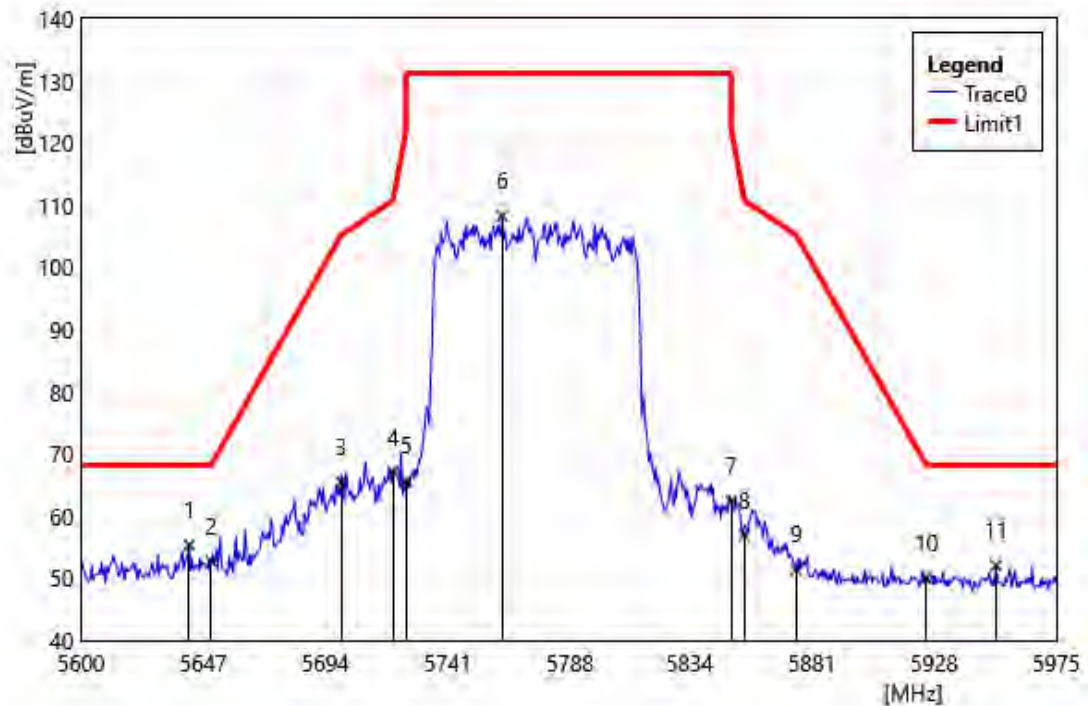


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5641.63	56.01	-0.63	55.38	68.20	-12.82	PEAK
2	5650.00	53.35	-0.64	52.71	68.20	-15.49	PEAK
3	5700.00	66.15	-0.61	65.54	105.20	-39.66	PEAK
4	5720.00	67.35	-0.40	66.95	110.80	-43.85	PEAK
5	5725.00	65.91	-0.34	65.57	122.20	-56.63	PEAK
6	5762.00	108.28	-0.02	108.26	131.20	-22.94	PEAK
7	5850.00	62.15	0.28	62.43	122.20	-59.77	PEAK
8	5855.00	56.59	0.29	56.88	110.80	-53.92	PEAK
9	5875.00	51.01	0.34	51.35	105.20	-53.85	PEAK
10	5925.00	49.78	0.28	50.06	68.20	-18.14	PEAK
11	5951.75	51.90	0.14	52.04	68.20	-16.16	PEAK

Beamforming on

Harmonic


Above 1 GHz

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5180 MHz		
Polarization:	Vertical		
Remark:			

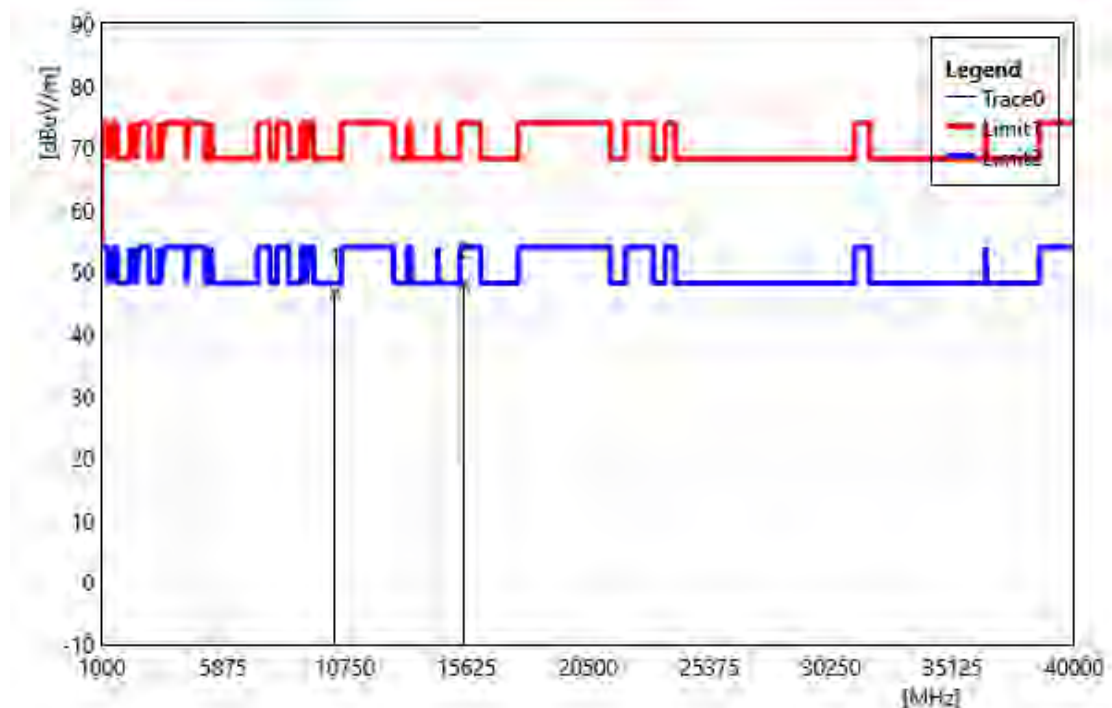


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10360.00	35.47	11.17	46.64	68.20	-21.56	PEAK
2	15540.00	33.85	14.09	47.94	74.00	-26.06	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5180 MHz		
Polarization:	Horizontal		
Remark:			

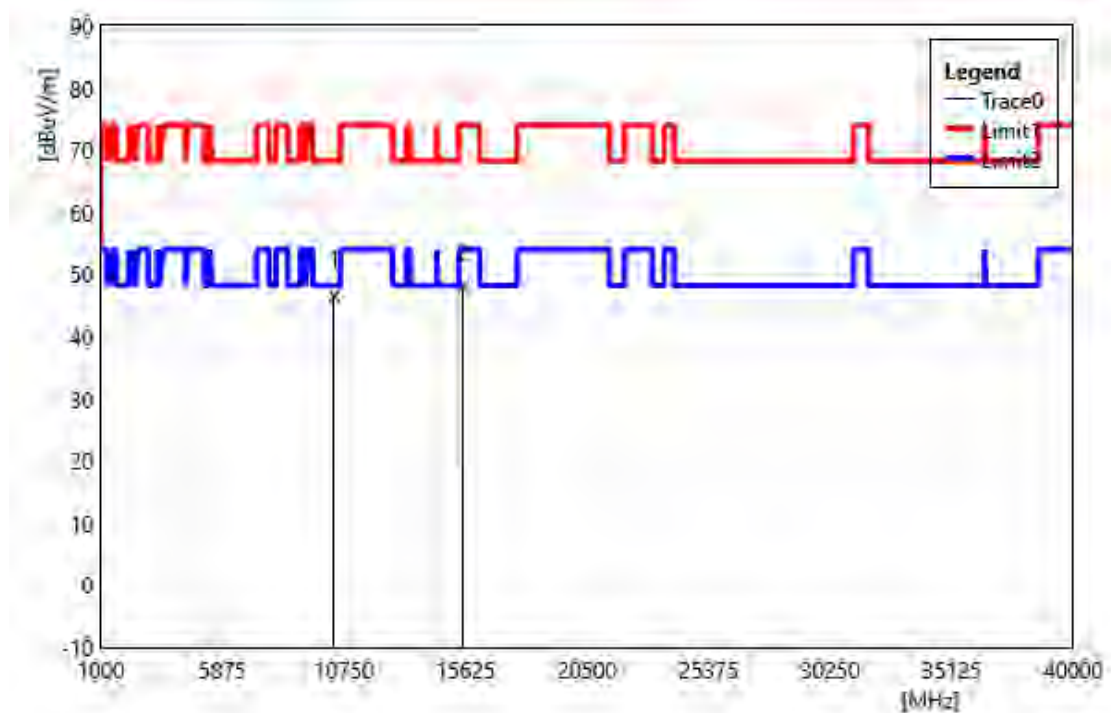


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10360.00	35.35	11.17	46.52	68.20	-21.68	PEAK
2	15540.00	33.90	14.09	47.99	74.00	-26.01	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5200 MHz		
Polarization:	Vertical		
Remark:			

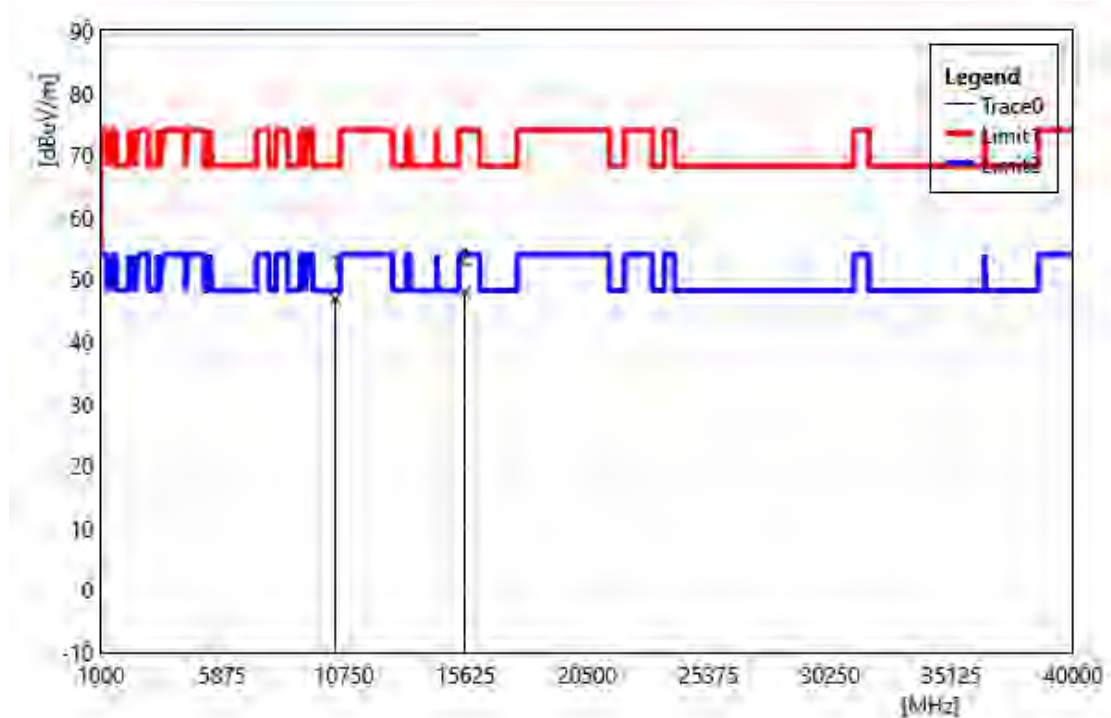


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10400.00	35.46	11.38	46.84	68.20	-21.36	PEAK
2	15600.00	33.99	13.96	47.94	74.00	-26.06	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5200 MHz		
Polarization:	Horizontal		
Remark:			

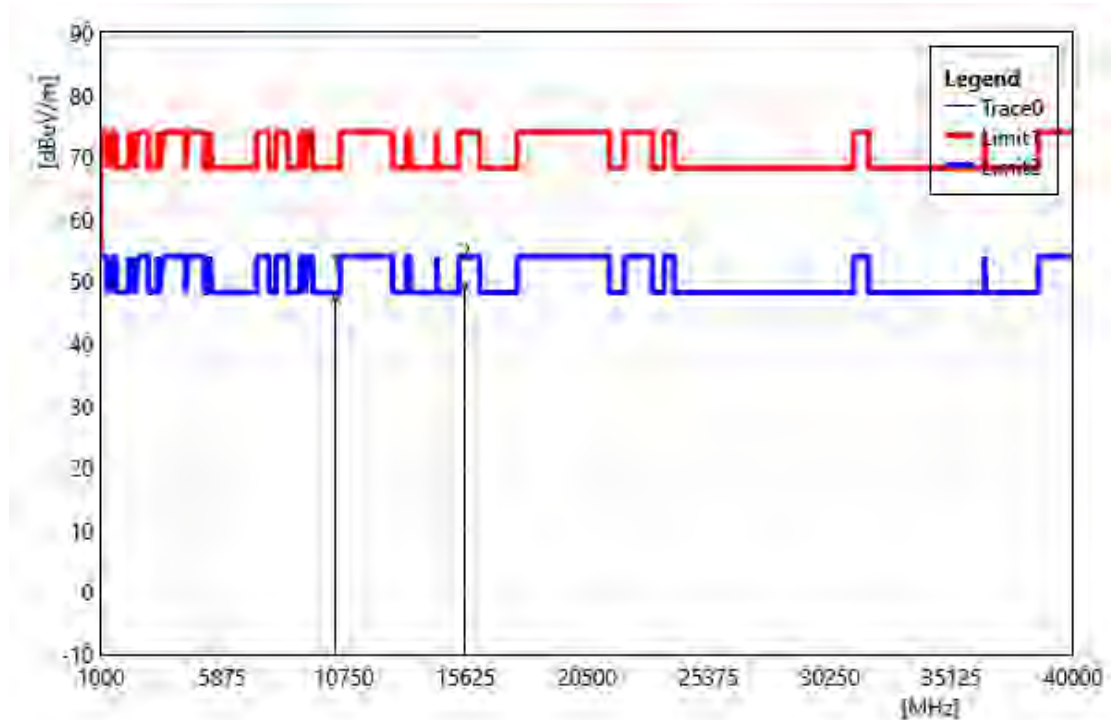


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10400.00	35.88	11.38	47.26	68.20	-20.94	PEAK
2	15600.00	35.21	13.96	49.17	74.00	-24.83	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5240 MHz		
Polarization:	Vertical		
Remark:			

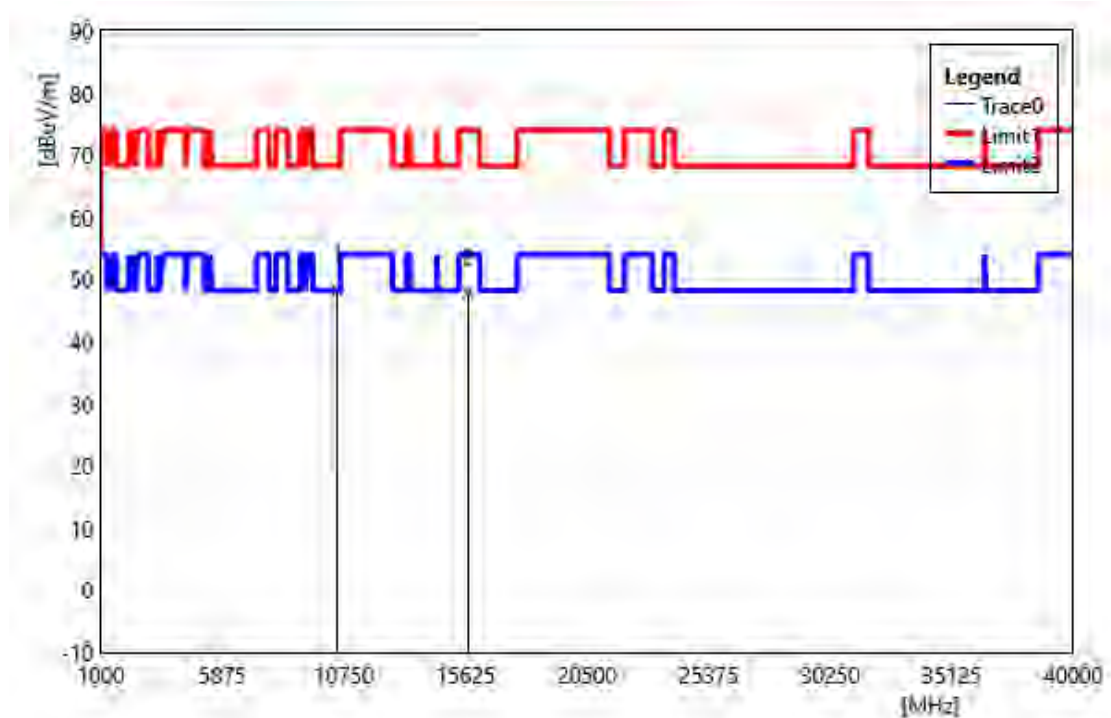

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10480.00	36.74	11.56	48.30	68.20	-19.90	PEAK
2	15720.00	34.06	13.82	47.88	74.00	-26.12	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5240 MHz		
Polarization:	Horizontal		
Remark:			

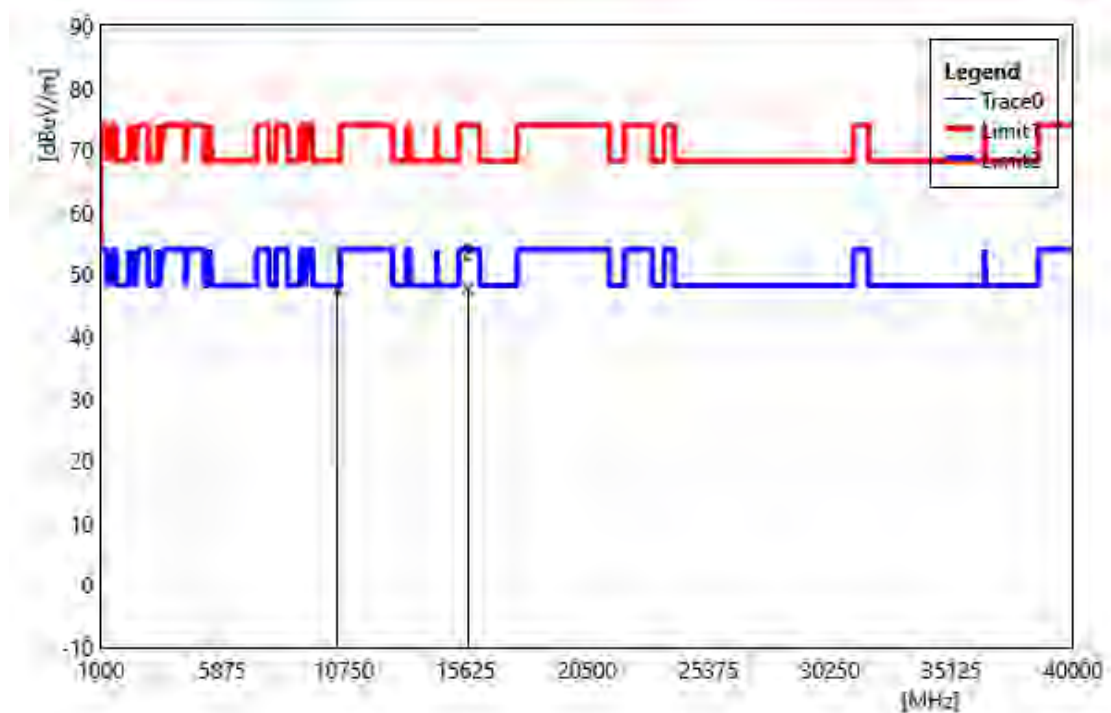

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10480.00	35.82	11.56	47.38	68.20	-20.82	PEAK
2	15720.00	33.92	13.82	47.74	74.00	-26.26	PEAK