



Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5710 MHz		
Polarization:	Horizontal		
Remark:			

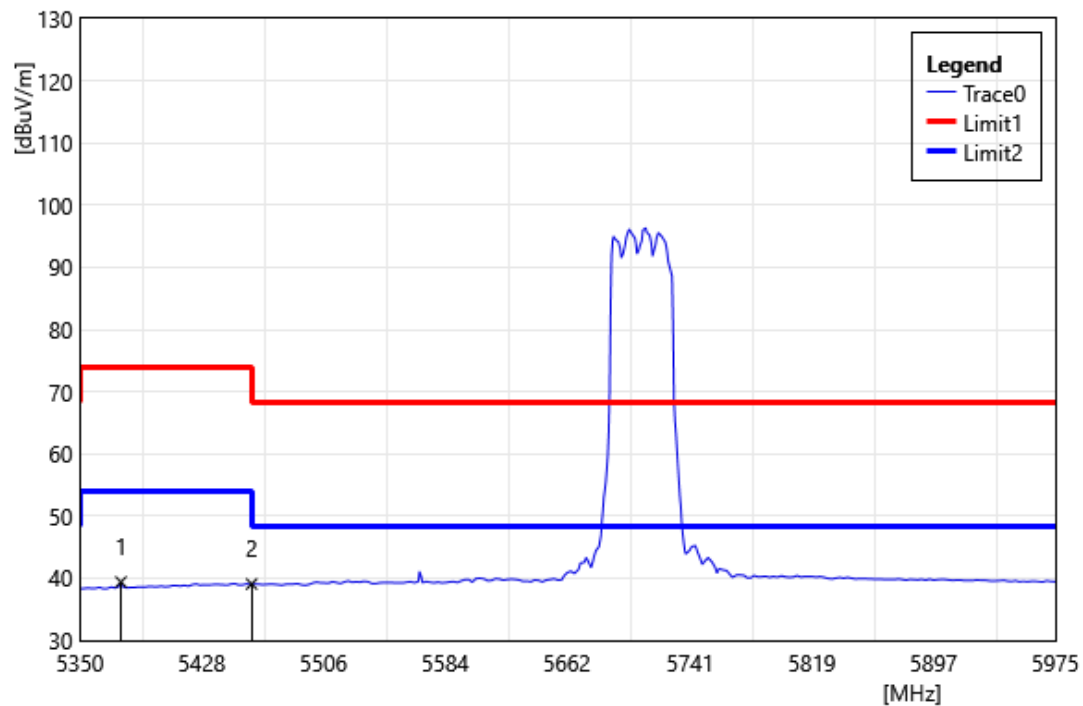


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5376.25	40.51	-1.11	39.40	54.00	-14.60	AVG
2	5460.00	39.65	-0.57	39.08	54.00	-14.92	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5755 MHz		
Polarization:	Vertical		
Remark:			

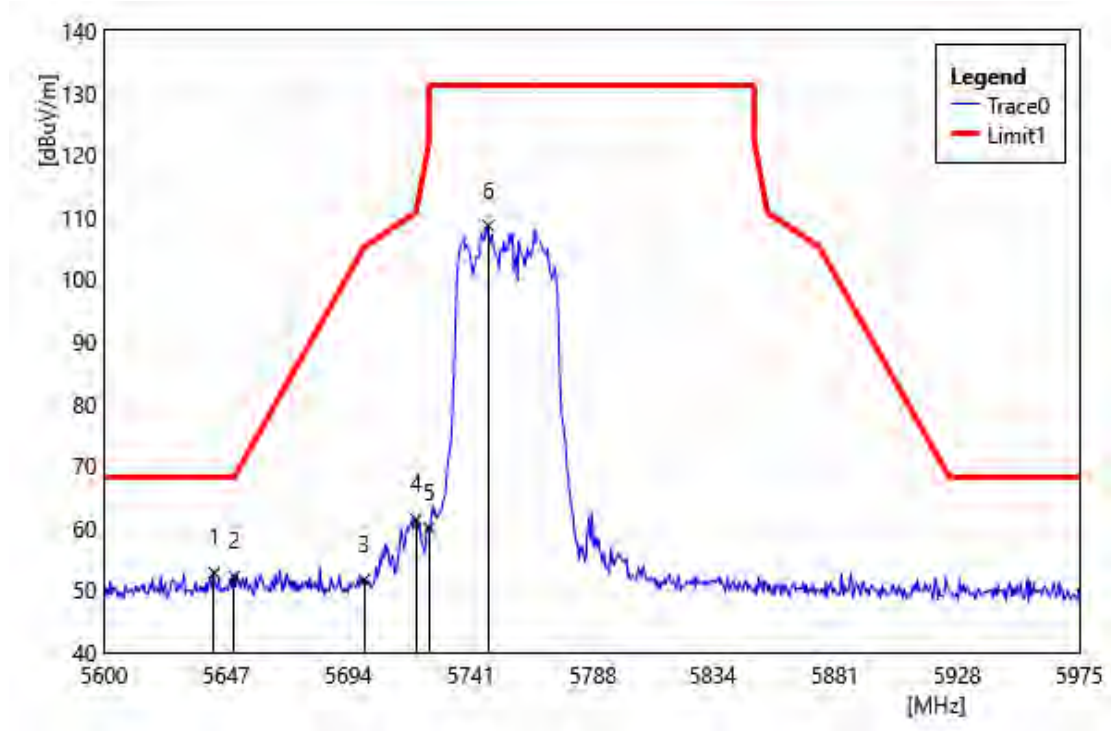


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5642.38	53.41	-0.63	52.78	68.20	-15.42	PEAK
2	5650.00	52.82	-0.64	52.18	68.20	-16.02	PEAK
3	5700.00	52.26	-0.61	51.65	105.20	-53.55	PEAK
4	5720.00	61.82	-0.40	61.42	110.80	-49.38	PEAK
5	5725.00	60.31	-0.34	59.97	122.20	-62.23	PEAK
6	5747.75	108.76	-0.10	108.66	131.20	-22.54	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5755 MHz		
Polarization:	Horizontal		
Remark:			

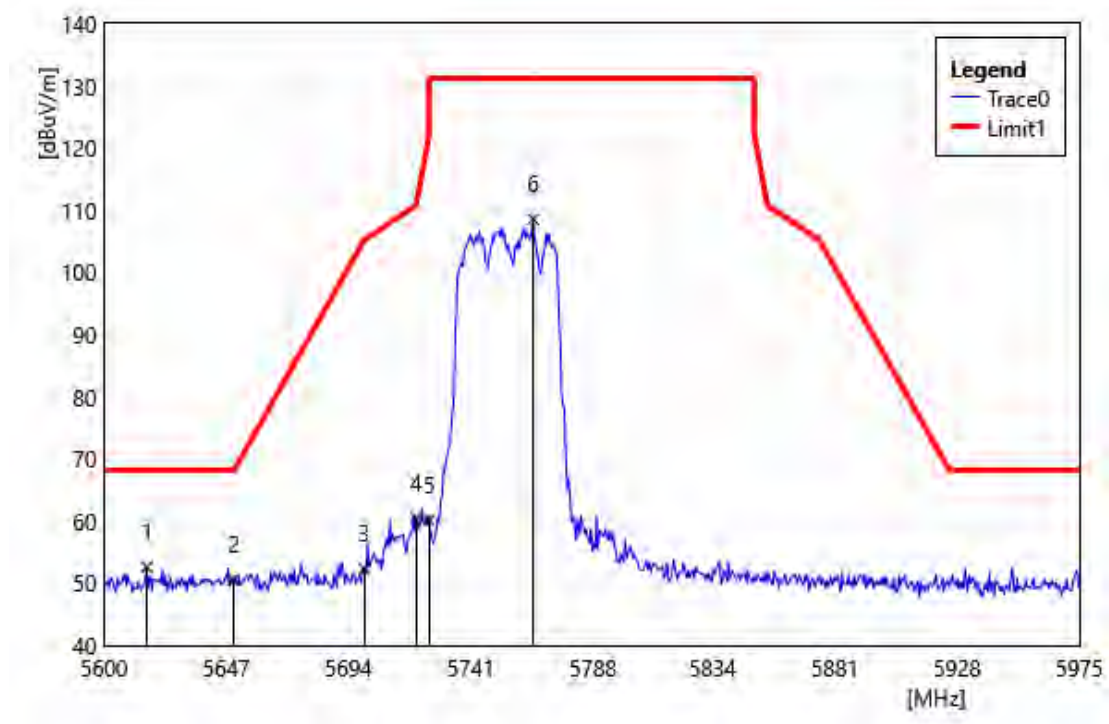


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5616.50	53.22	-0.59	52.63	68.20	-15.57	PEAK
2	5650.00	51.19	-0.64	50.55	68.20	-17.65	PEAK
3	5700.00	52.94	-0.61	52.33	105.20	-52.87	PEAK
4	5720.00	60.90	-0.40	60.50	110.80	-50.30	PEAK
5	5725.00	60.53	-0.34	60.19	122.20	-62.01	PEAK
6	5765.00	108.55	-0.01	108.54	131.20	-22.66	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5795 MHz		
Polarization:	Vertical		
Remark:			

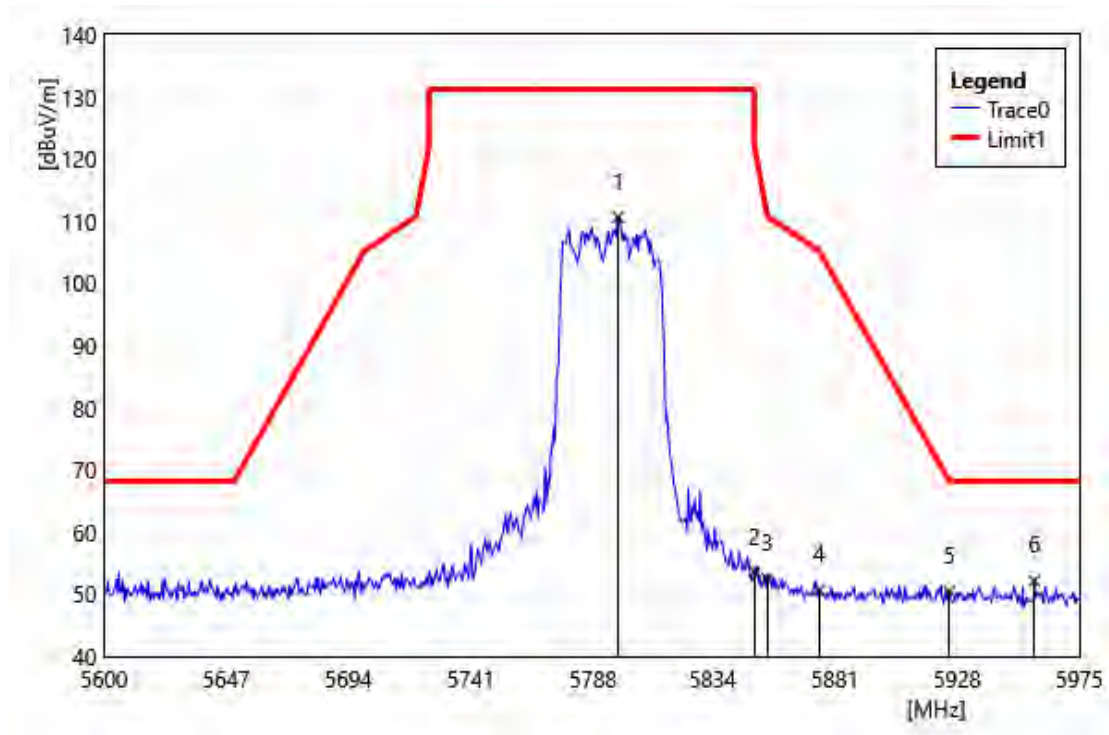


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5797.63	110.46	0.14	110.60	131.20	-20.60	PEAK
2	5850.00	53.35	0.28	53.63	122.20	-68.57	PEAK
3	5855.00	52.20	0.29	52.49	110.80	-58.31	PEAK
4	5875.00	50.39	0.34	50.73	105.20	-54.47	PEAK
5	5925.00	50.11	0.28	50.39	68.20	-17.81	PEAK
6	5957.75	52.02	0.16	52.18	68.20	-16.02	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5795 MHz		
Polarization:	Horizontal		
Remark:			

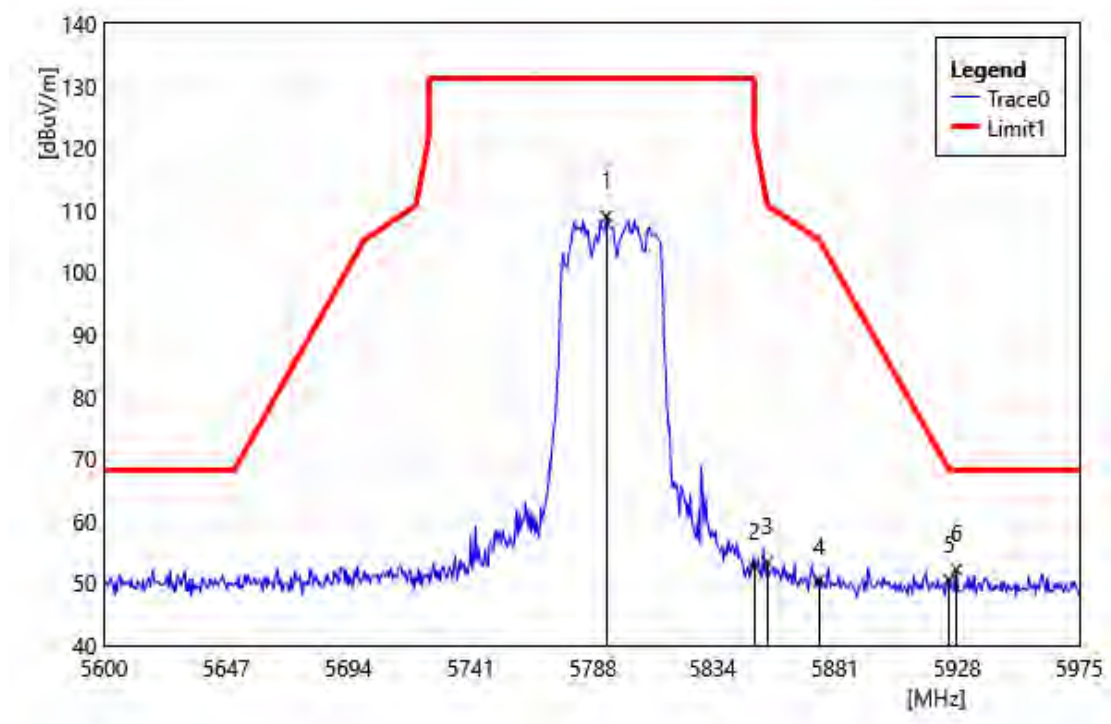


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5793.13	108.89	0.12	109.01	131.20	-22.19	PEAK
2	5850.00	52.35	0.28	52.63	122.20	-69.57	PEAK
3	5855.00	53.11	0.29	53.40	110.80	-57.40	PEAK
4	5875.00	50.04	0.34	50.38	105.20	-54.82	PEAK
5	5925.00	50.16	0.28	50.44	68.20	-17.76	PEAK
6	5927.75	51.95	0.26	52.21	68.20	-15.99	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5210 MHz		
Polarization:	Vertical		
Remark:			

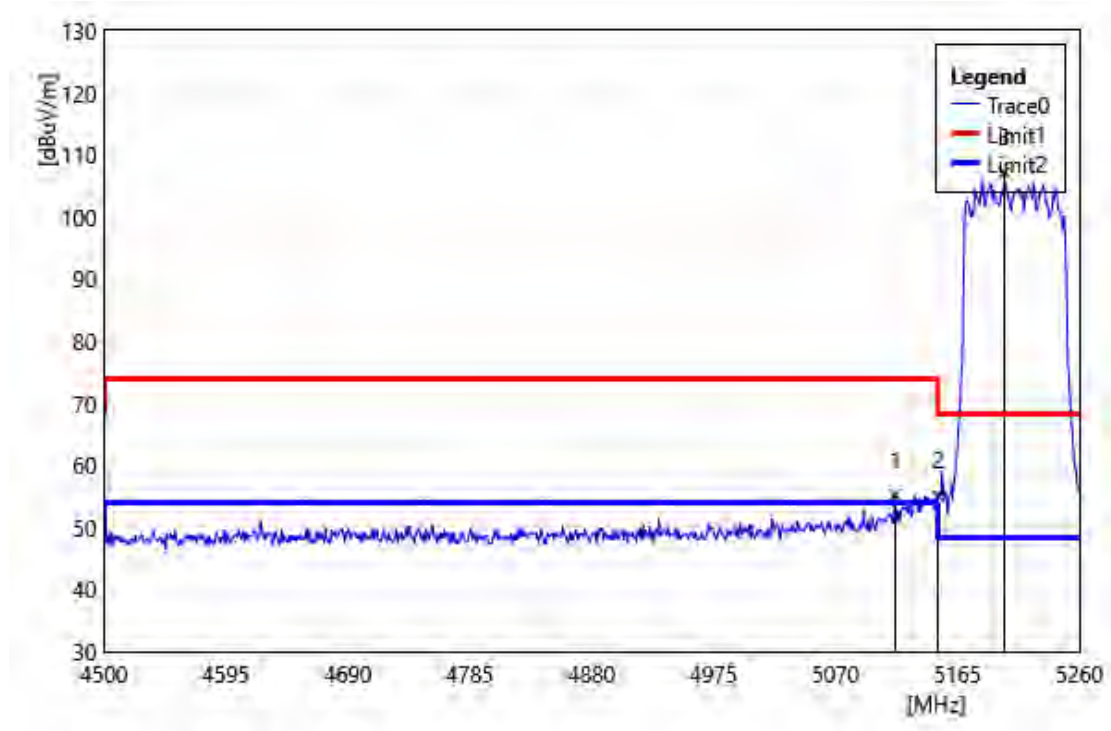


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5116.36	56.14	-0.88	55.26	74.00	-18.74	PEAK
2	5150.00	55.91	-0.91	55.00	74.00	-19.00	PEAK
3	5201.48	108.31	-1.16	107.15	68.20	38.95	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5210 MHz		
Polarization:	Horizontal		
Remark:			

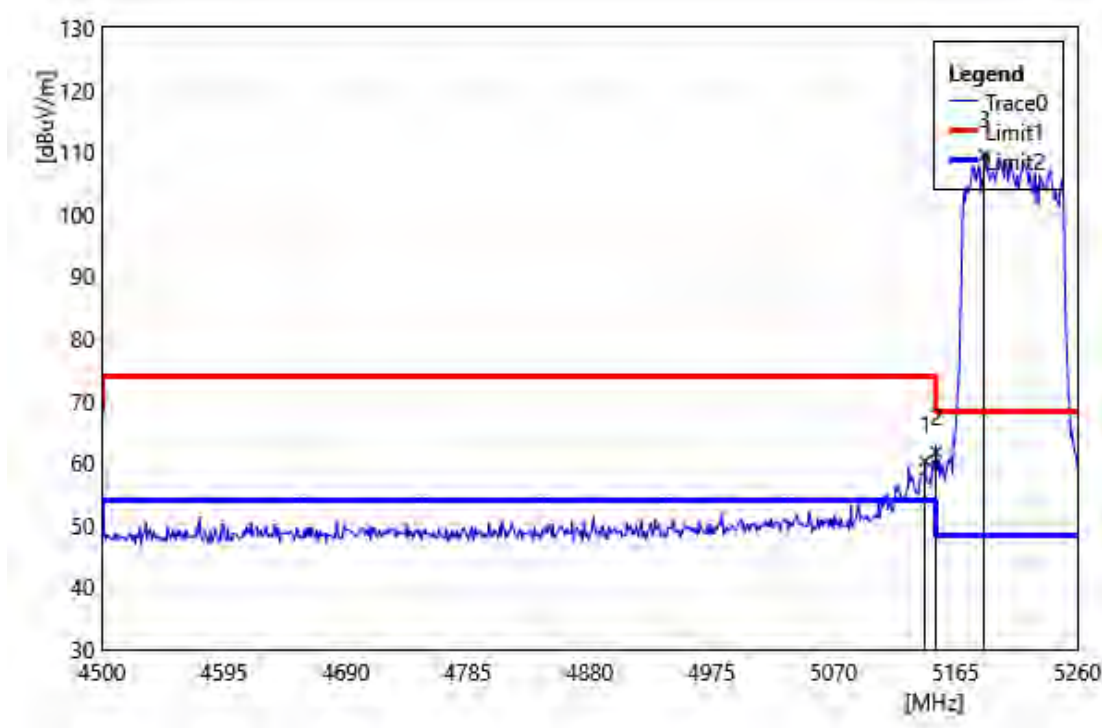


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5141.44	61.23	-0.90	60.33	74.00	-13.67	PEAK
2	5150.00	62.68	-0.91	61.78	74.00	-12.22	PEAK
3	5187.80	110.66	-1.09	109.57	68.20	41.37	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5210 MHz		
Polarization:	Vertical		
Remark:			

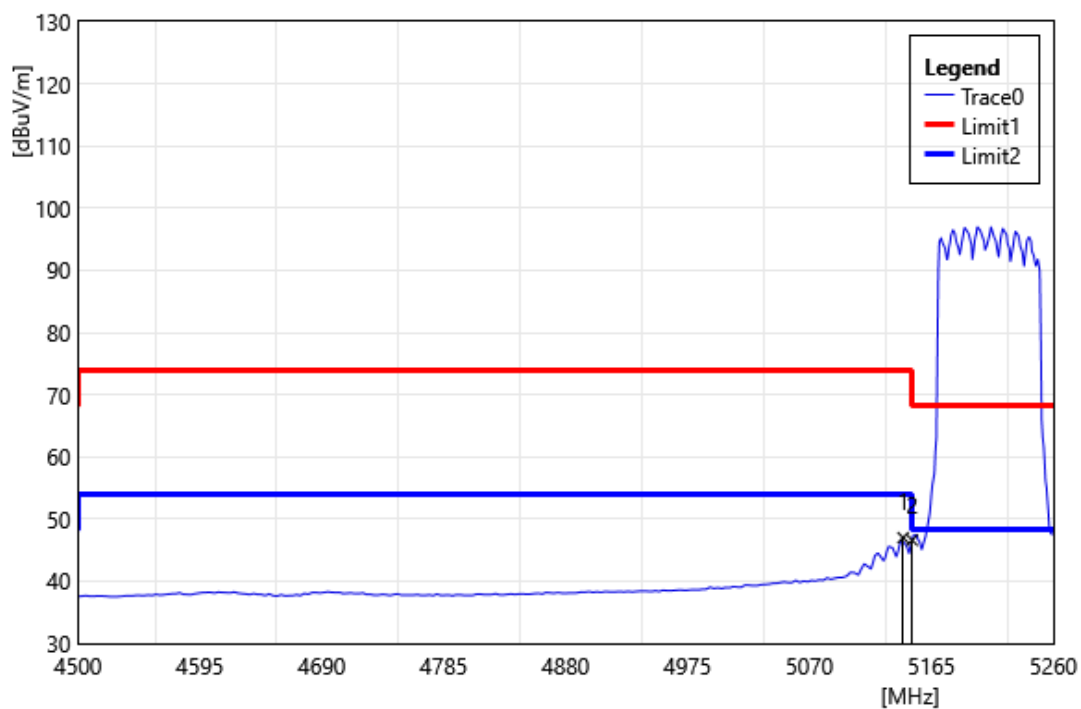


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5142.96	47.90	-0.90	47.00	54.00	-7.00	AVG
2	5150.00	47.51	-0.91	46.60	54.00	-7.40	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5210 MHz		
Polarization:	Horizontal		
Remark:			

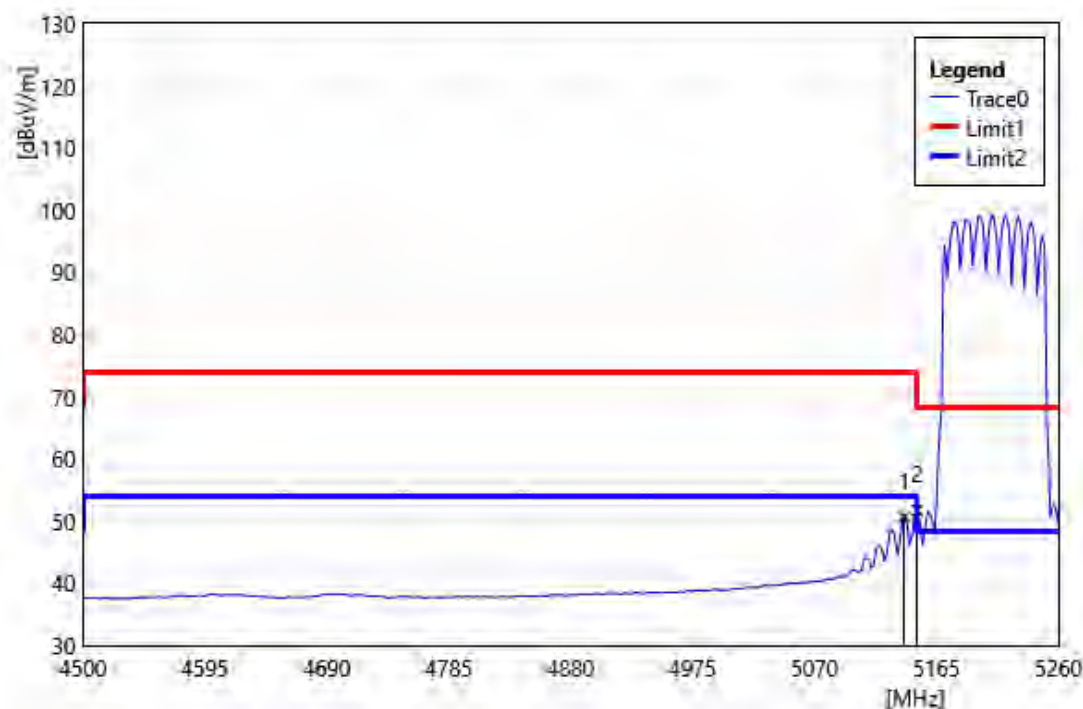


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5139.92	51.58	-0.90	50.68	54.00	-3.32	AVG
2	5150.00	52.65	-0.91	51.75	54.00	-2.25	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5290 MHz		
Polarization:	Vertical		
Remark:			

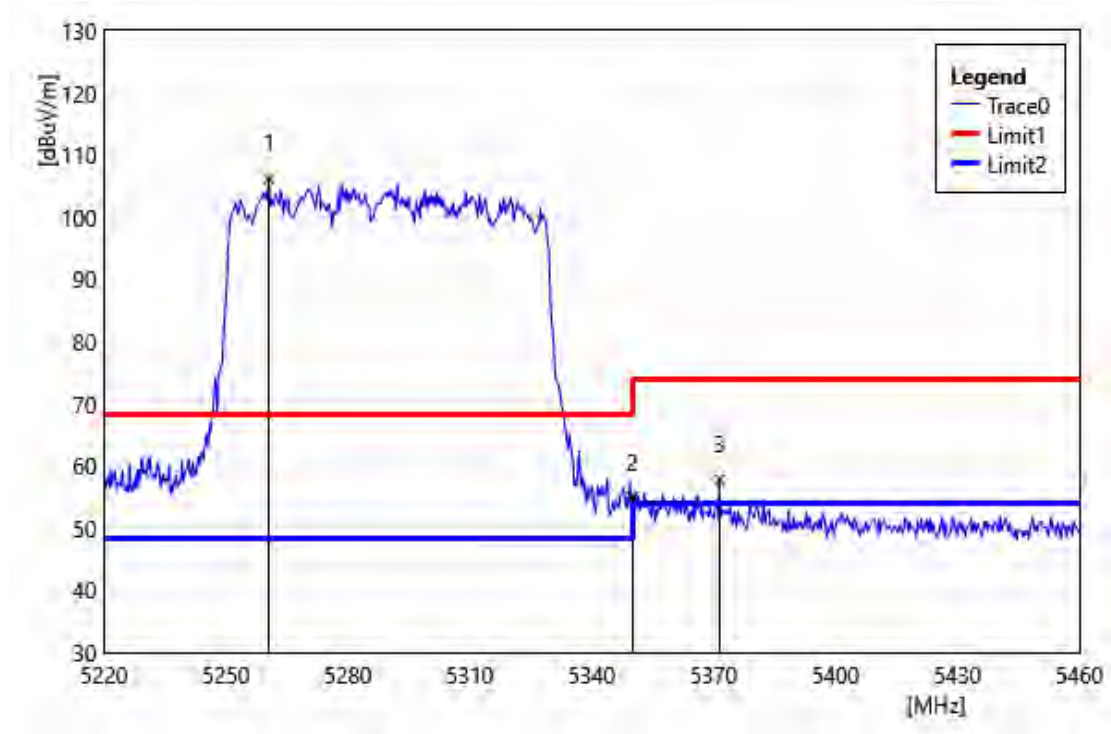


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5260.56	107.76	-1.53	106.23	68.20	38.03	PEAK
2	5350.00	56.23	-1.29	54.94	74.00	-19.06	PEAK
3	5371.44	58.94	-1.14	57.80	74.00	-16.20	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5290 MHz		
Polarization:	Vertical		
Remark:			

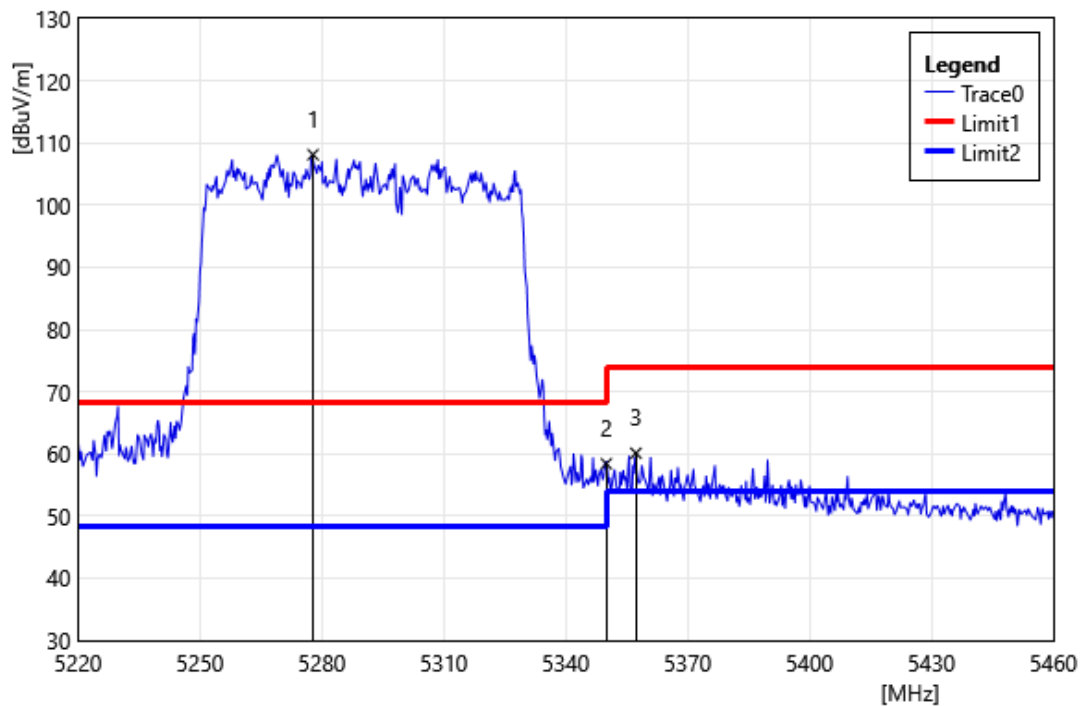


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5277.84	109.70	-1.58	108.12	68.20	39.92	PEAK
2	5350.00	59.71	-1.29	58.42	74.00	-15.58	PEAK
3	5357.28	61.35	-1.24	60.11	74.00	-13.89	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5290 MHz		
Polarization:	Vertical		
Remark:			

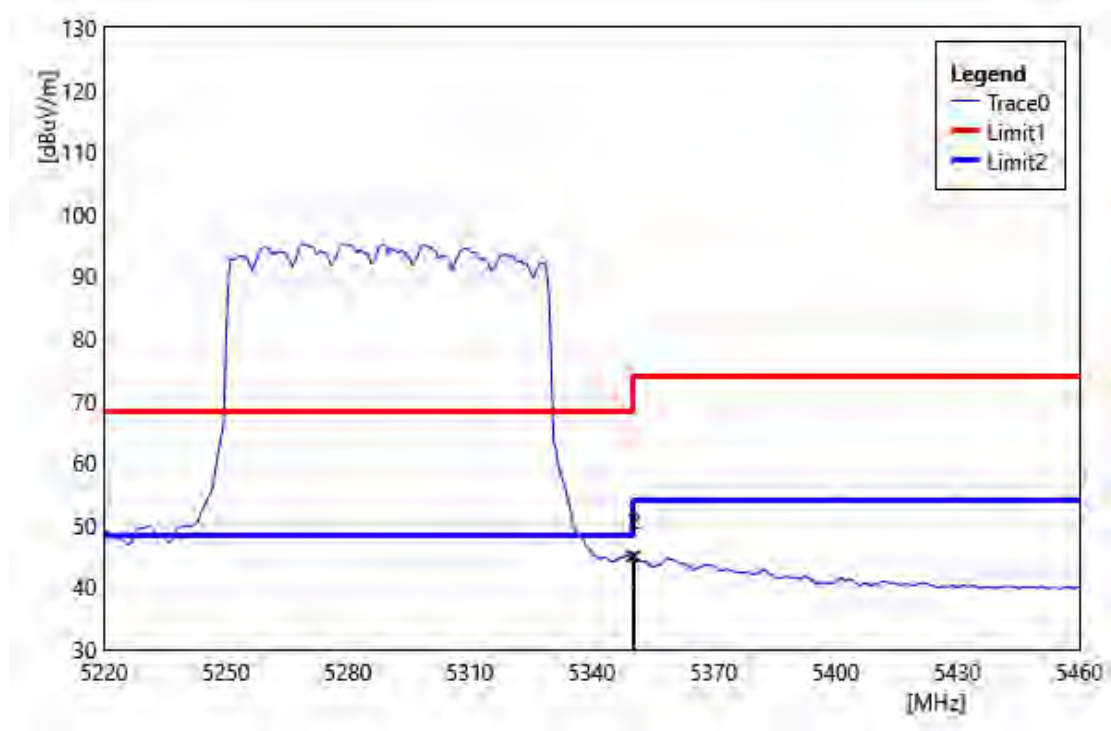


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	46.27	-1.29	44.98	54.00	-9.02	AVG
2	5350.56	46.34	-1.29	45.05	54.00	-8.95	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5290 MHz		
Polarization:	Horizontal		
Remark:			

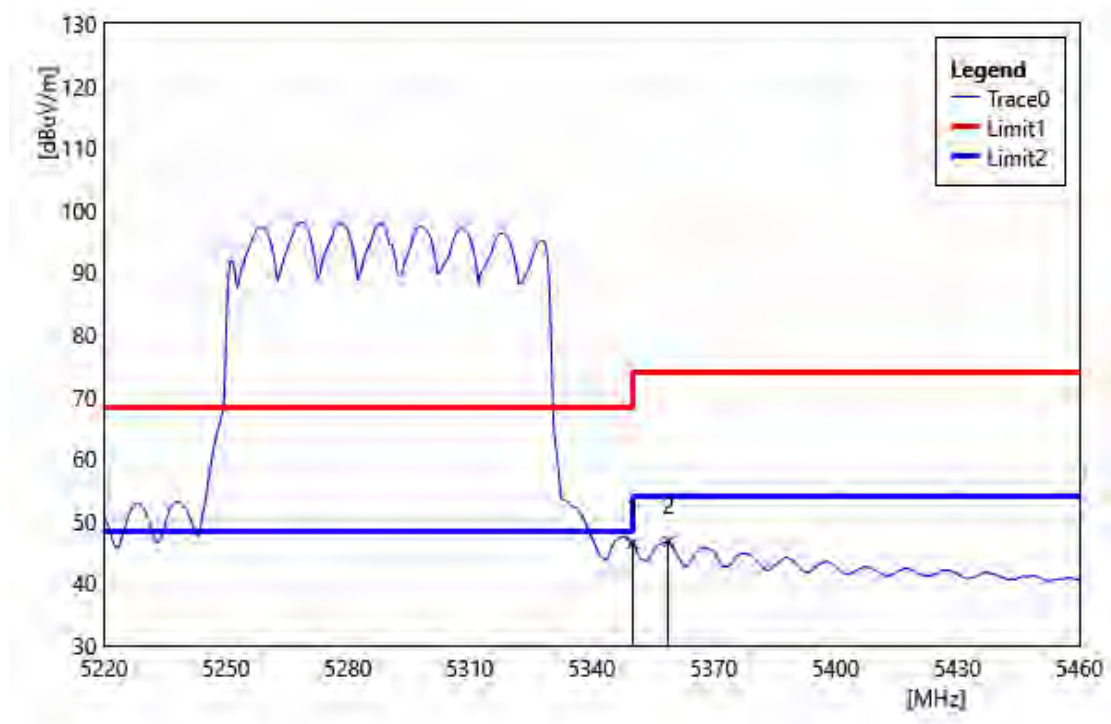


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5350.00	47.71	-1.29	46.42	54.00	-7.58	AVG
2	5358.96	47.96	-1.23	46.73	54.00	-7.27	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5530 MHz		
Polarization:	Vertical		
Remark:			

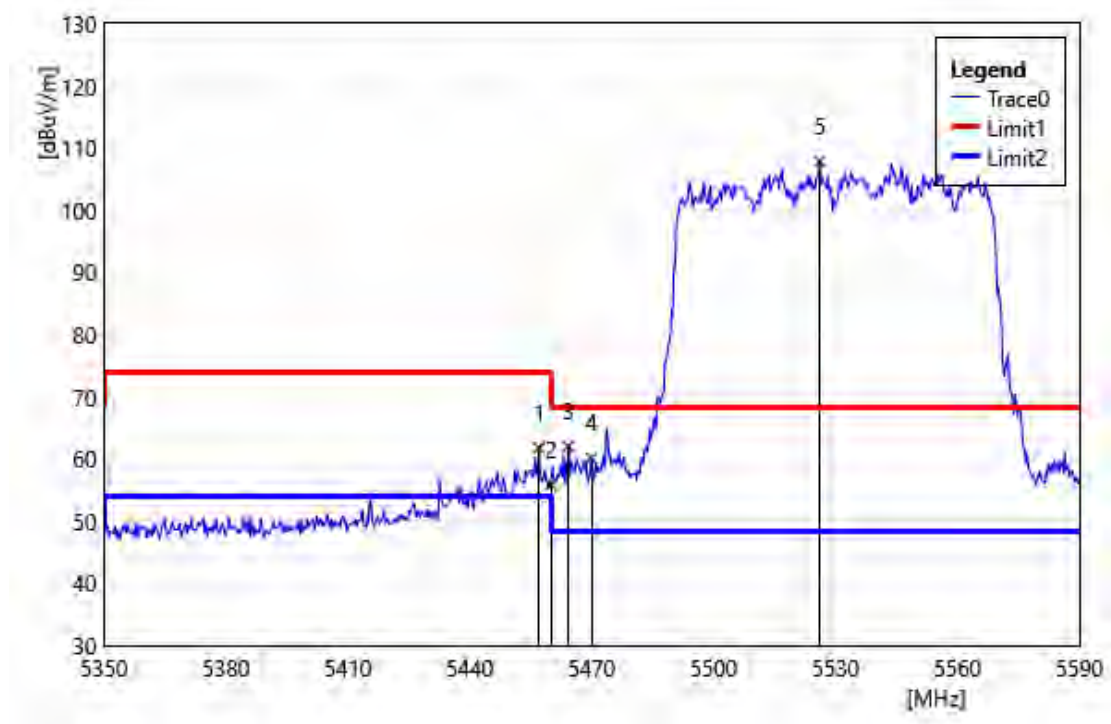


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5457.04	62.37	-0.58	61.79	74.00	-12.21	PEAK
2	5460.00	56.39	-0.57	55.82	74.00	-18.18	PEAK
3	5464.24	62.62	-0.57	62.05	68.20	-6.15	PEAK
4	5470.00	60.66	-0.56	60.10	68.20	-8.10	PEAK
5	5526.16	108.35	-0.51	107.84	68.20	39.64	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5530 MHz		
Polarization:	Horizontal		
Remark:			

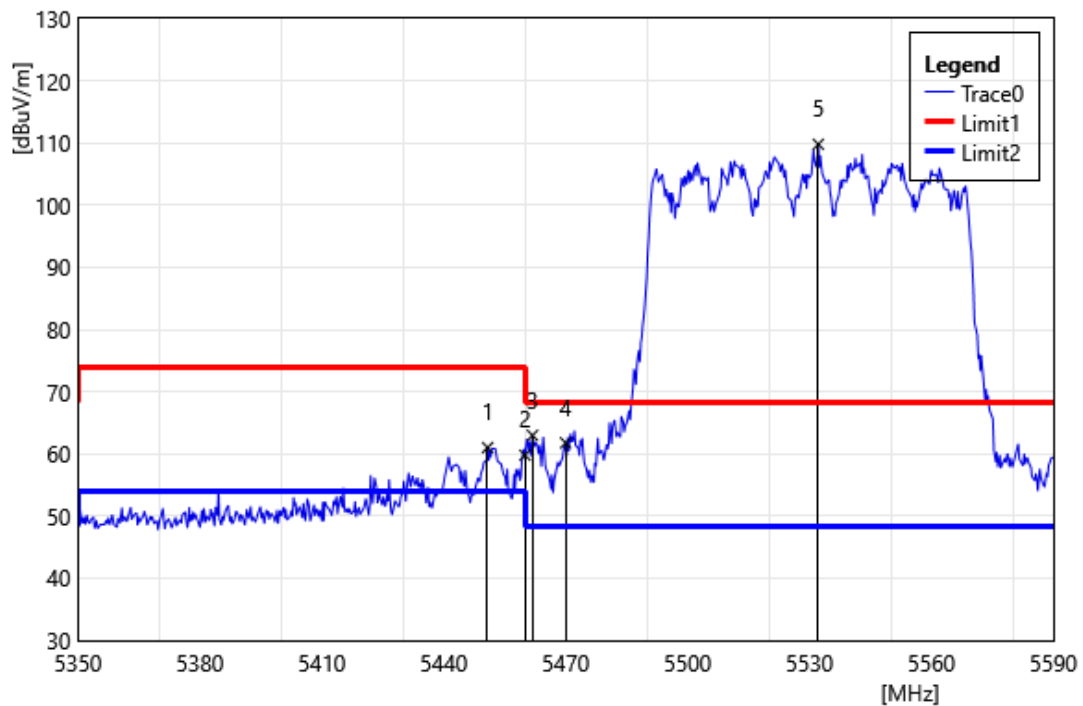


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5450.80	61.59	-0.58	61.01	74.00	-12.99	PEAK
2	5460.00	60.35	-0.57	59.78	74.00	-14.22	PEAK
3	5461.84	63.56	-0.57	62.99	68.20	-5.21	PEAK
4	5470.00	62.34	-0.56	61.78	68.20	-6.42	PEAK
5	5532.16	110.30	-0.51	109.79	68.20	41.59	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5530 MHz		
Polarization:	Vertical		
Remark:			

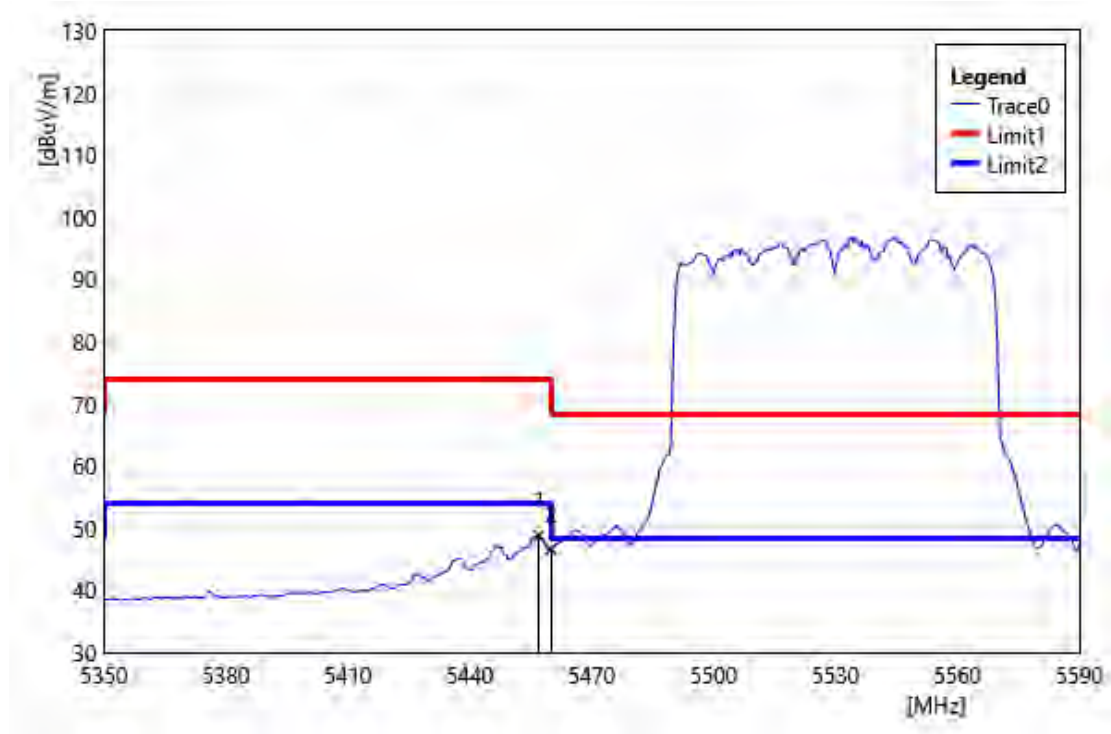


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5457.04	49.36	-0.58	48.78	54.00	-5.22	AVG
2	5460.00	47.16	-0.57	46.59	54.00	-7.41	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5530 MHz		
Polarization:	Horizontal		
Remark:			

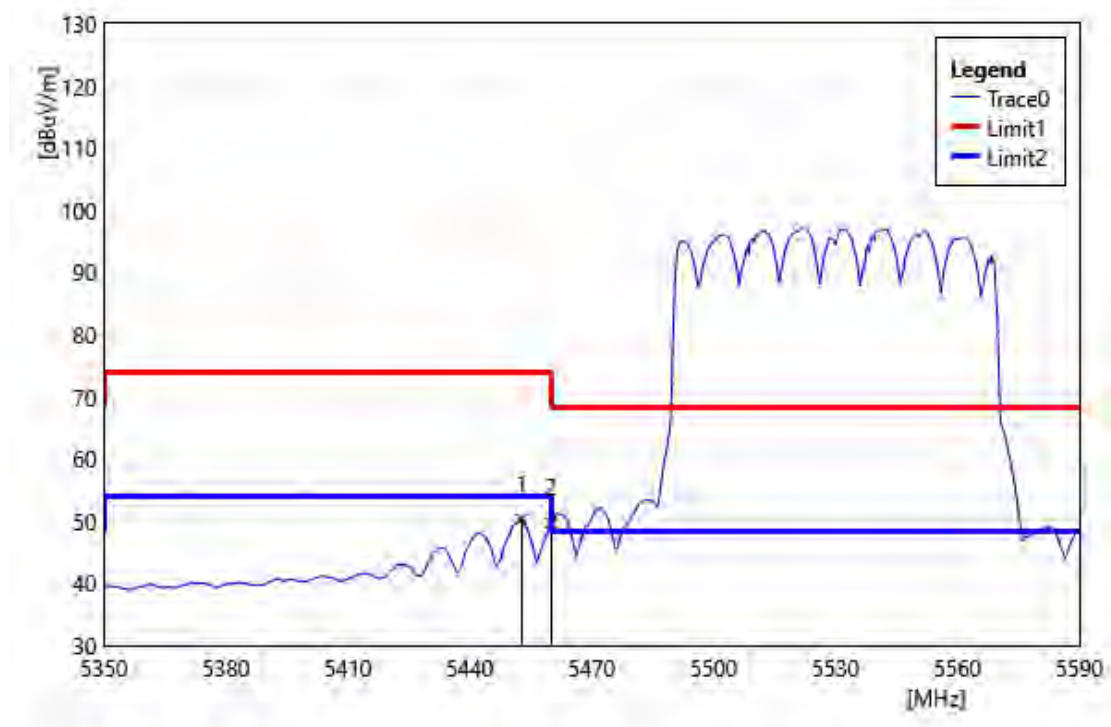


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5452.72	50.91	-0.58	50.33	54.00	-3.67	AVG
2	5460.00	50.33	-0.57	49.76	54.00	-4.24	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5610 MHz		
Polarization:	Vertical		
Remark:			

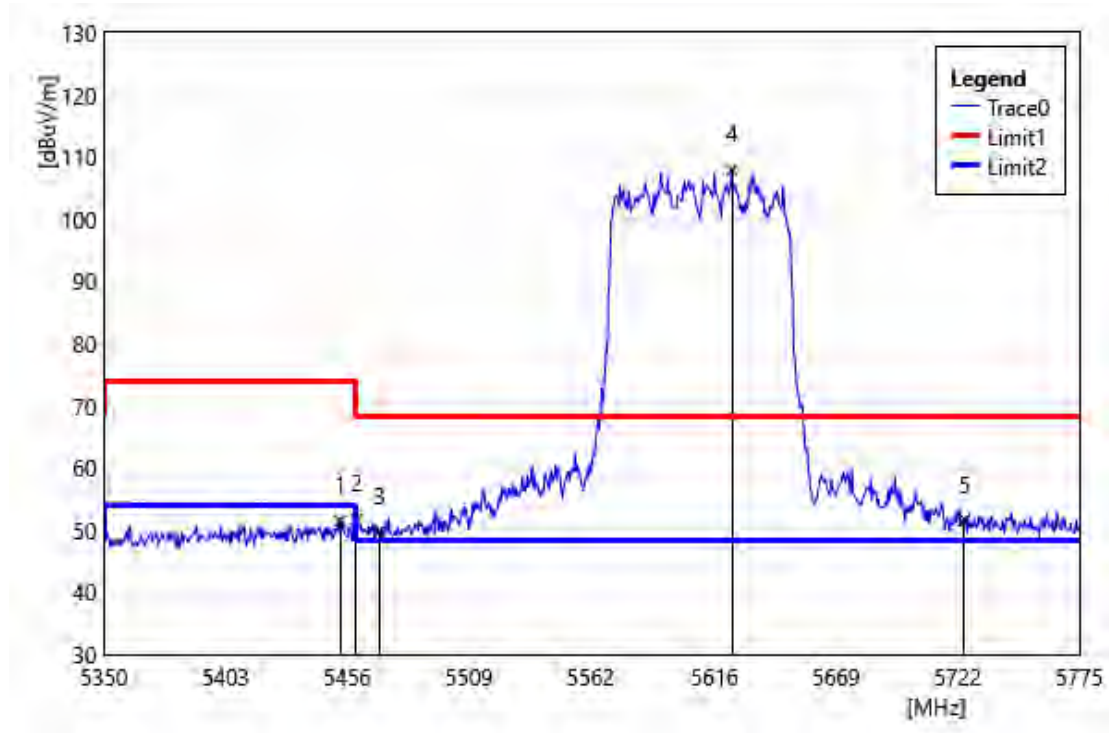


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5452.85	52.12	-0.58	51.54	74.00	-22.46	PEAK
2	5460.00	52.30	-0.57	51.73	74.00	-22.27	PEAK
3	5470.00	50.37	-0.56	49.81	68.20	-18.39	PEAK
4	5623.70	108.59	-0.60	107.99	68.20	39.79	PEAK
5	5725.00	52.01	-0.34	51.67	68.20	-16.53	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5610 MHz		
Polarization:	Horizontal		
Remark:			

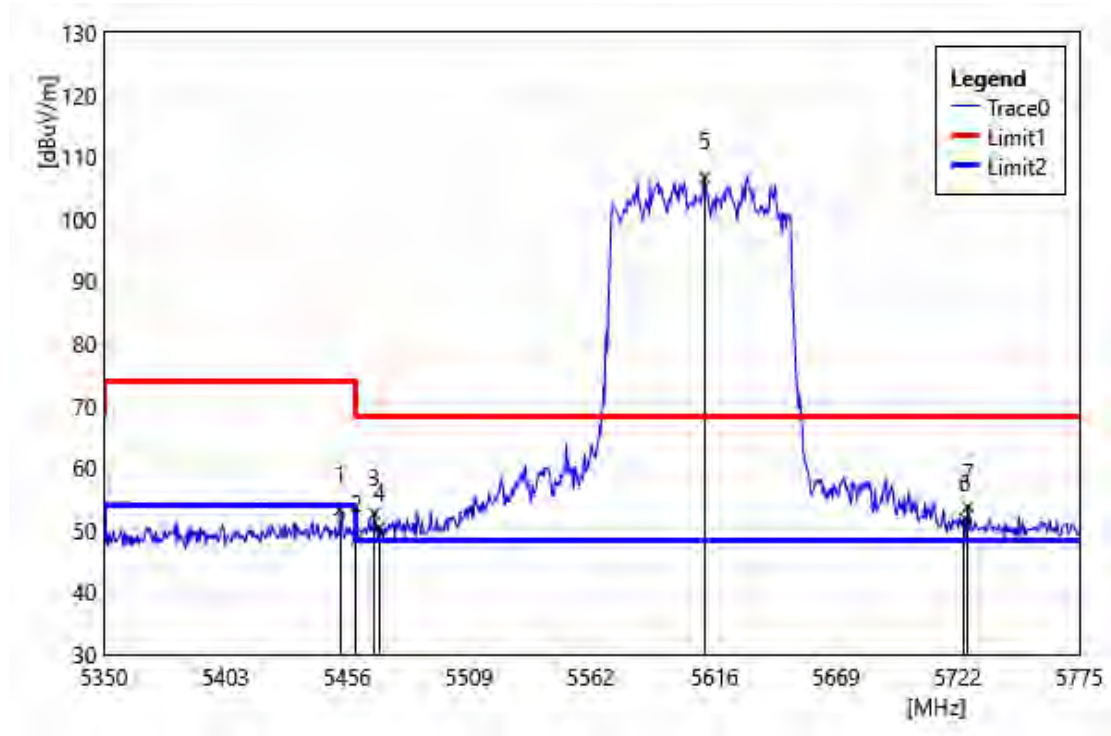


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5452.85	53.83	-0.58	53.25	74.00	-20.75	PEAK
2	5460.00	49.18	-0.57	48.61	74.00	-25.39	PEAK
3	5467.73	53.22	-0.56	52.66	68.20	-15.54	PEAK
4	5470.00	50.95	-0.56	50.39	68.20	-17.81	PEAK
5	5611.80	107.46	-0.59	106.87	68.20	38.67	PEAK
6	5725.00	52.21	-0.34	51.87	68.20	-16.33	PEAK
7	5726.55	54.05	-0.33	53.72	68.20	-14.48	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5610 MHz		
Polarization:	Vertical		
Remark:			

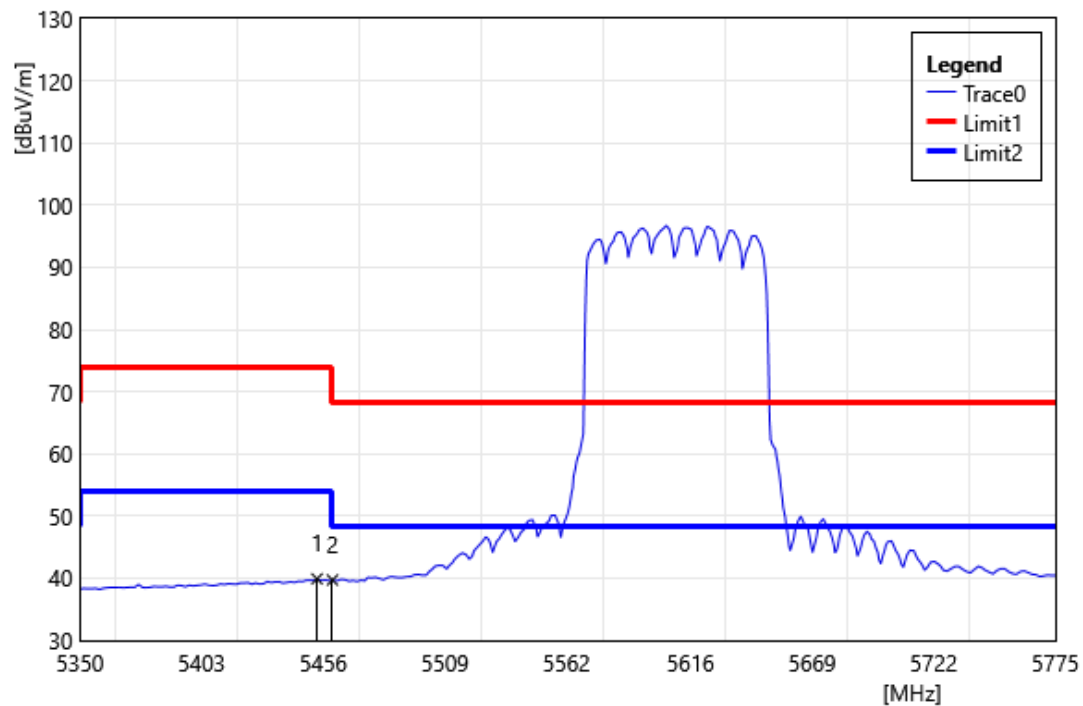


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5453.28	40.48	-0.58	39.90	54.00	-14.10	AVG
2	5460.00	40.29	-0.57	39.72	54.00	-14.28	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5610 MHz		
Polarization:	Horizontal		
Remark:			

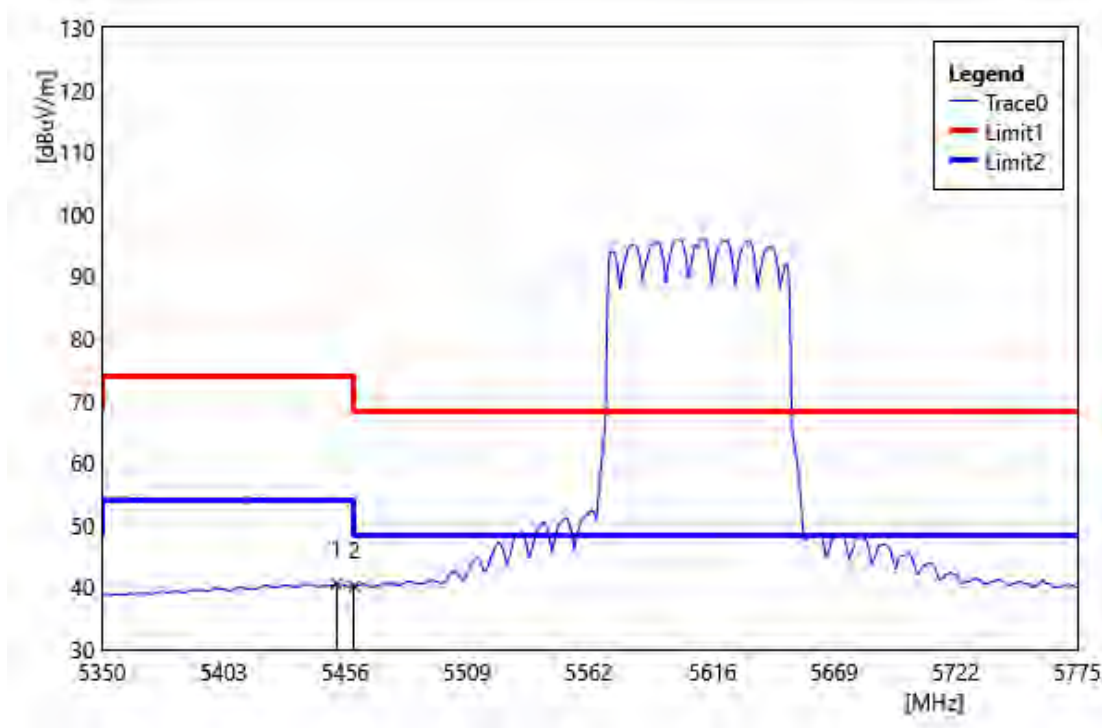


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5452.00	41.16	-0.58	40.58	54.00	-13.42	AVG
2	5460.00	40.76	-0.57	40.19	54.00	-13.81	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5690 MHz		
Polarization:	Vertical		
Remark:			

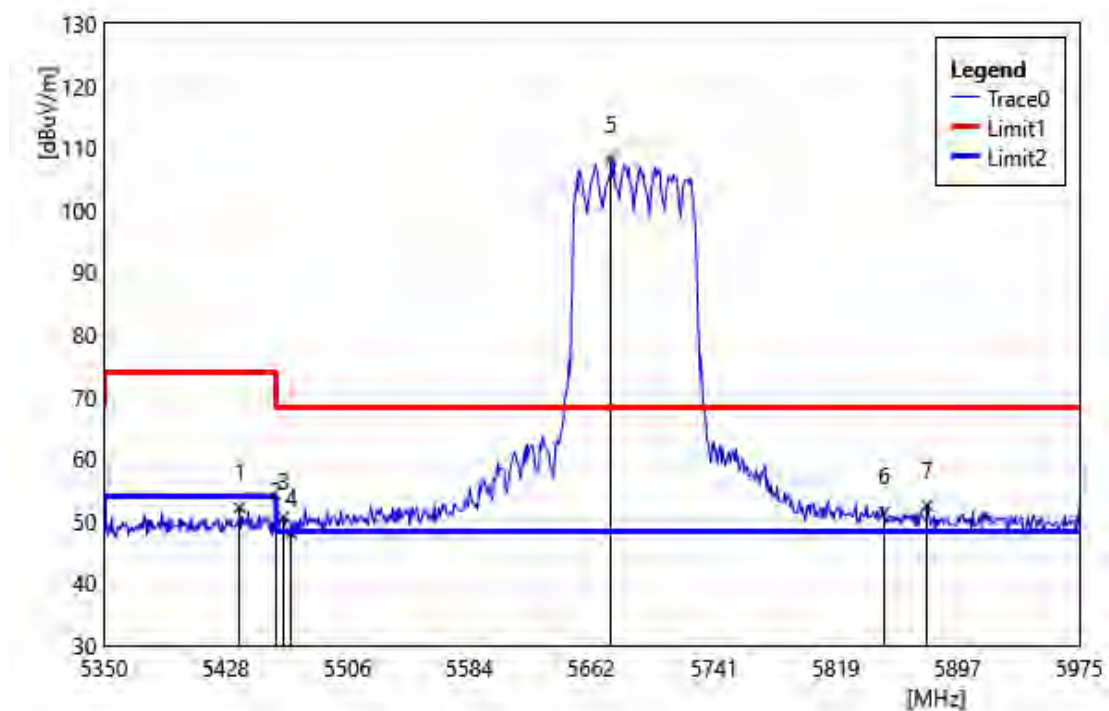


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5436.88	52.86	-0.68	52.18	74.00	-21.82	PEAK
2	5460.00	49.63	-0.57	49.06	74.00	-24.94	PEAK
3	5465.00	51.23	-0.57	50.66	68.20	-17.54	PEAK
4	5470.00	48.63	-0.56	48.07	68.20	-20.13	PEAK
5	5675.00	108.73	-0.62	108.11	68.20	39.91	PEAK
6	5850.00	51.20	0.28	51.48	68.20	-16.72	PEAK
7	5877.50	52.09	0.35	52.44	68.20	-15.76	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5690 MHz		
Polarization:	Horizontal		
Remark:			

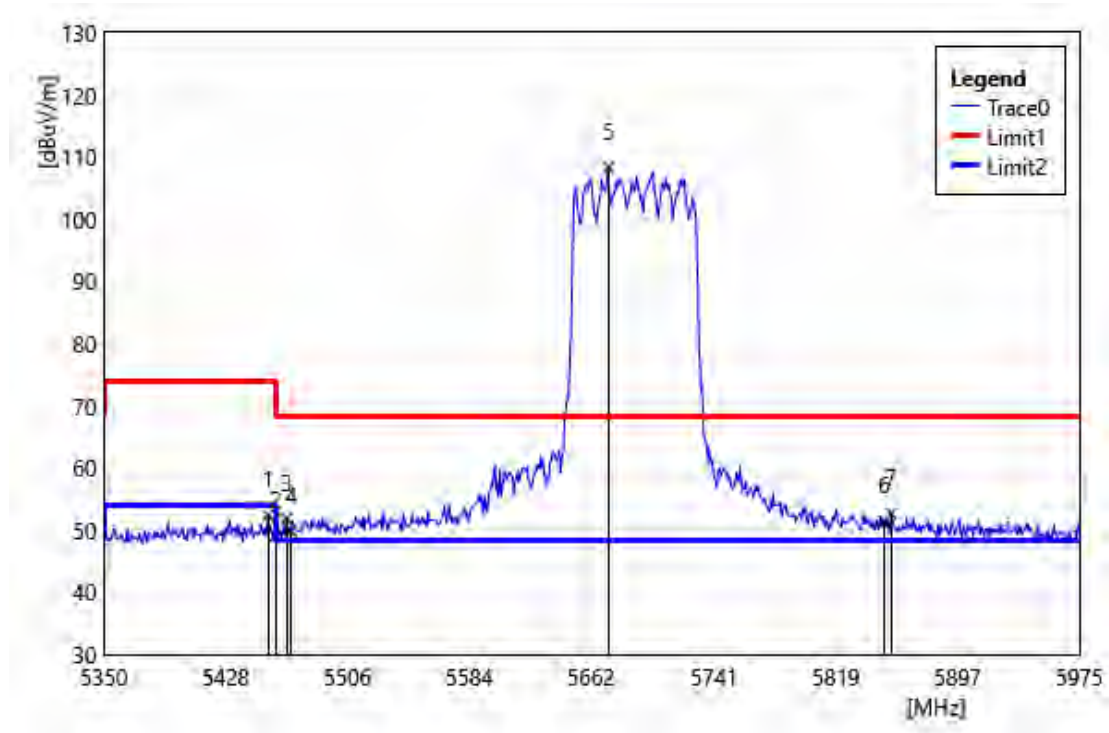


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5455.00	52.95	-0.58	52.37	74.00	-21.63	PEAK
2	5460.00	49.64	-0.57	49.07	74.00	-24.93	PEAK
3	5466.88	52.40	-0.57	51.83	68.20	-16.37	PEAK
4	5470.00	50.40	-0.56	49.84	68.20	-18.36	PEAK
5	5673.13	108.90	-0.63	108.27	68.20	40.07	PEAK
6	5850.00	51.26	0.28	51.54	68.20	-16.66	PEAK
7	5854.38	52.37	0.29	52.66	68.20	-15.54	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5690 MHz		
Polarization:	Vertical		
Remark:			

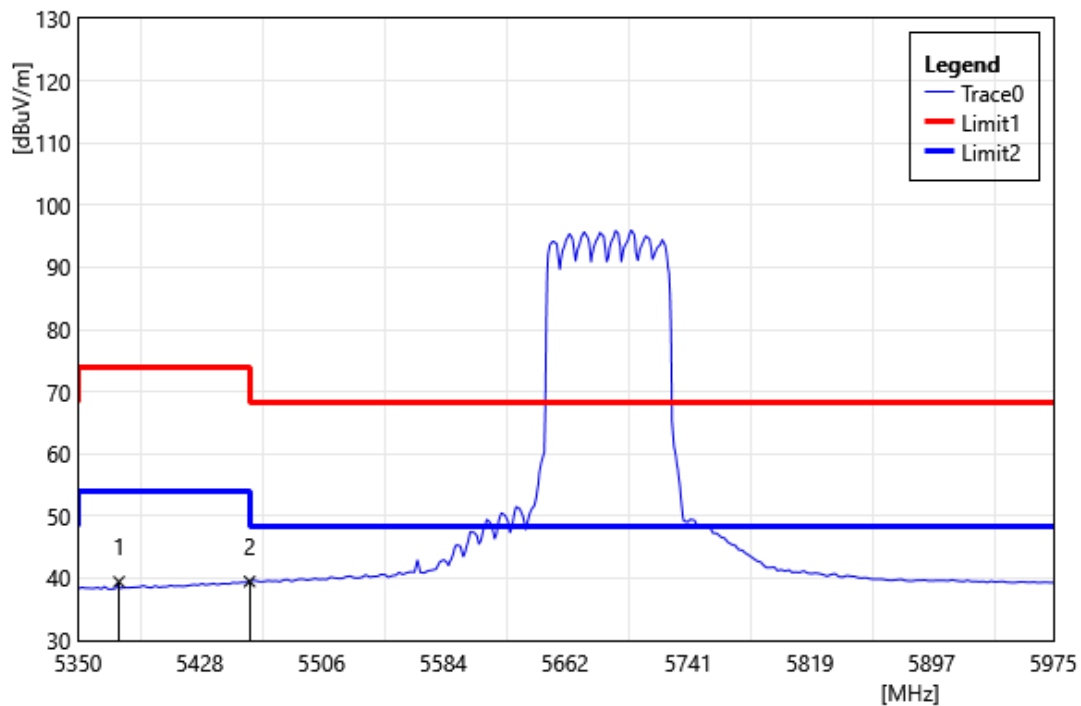


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5376.25	40.54	-1.11	39.43	54.00	-14.57	AVG
2	5460.00	40.04	-0.57	39.47	54.00	-14.53	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5690 MHz		
Polarization:	Horizontal		
Remark:			

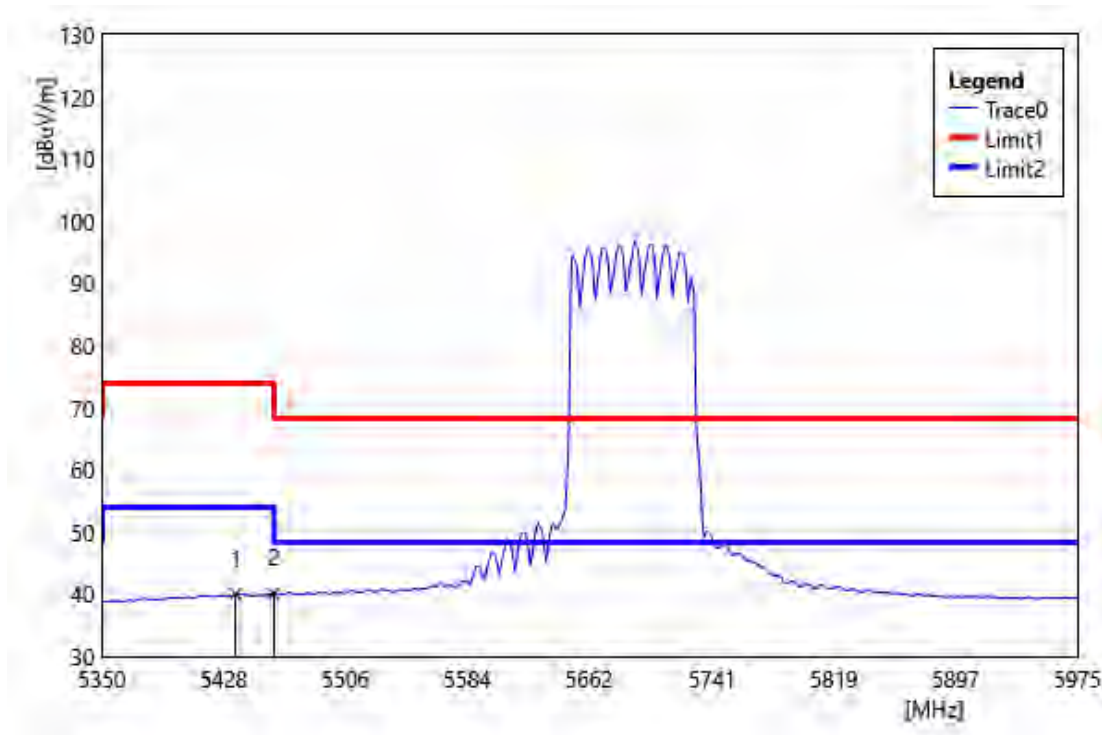


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5435.63	40.74	-0.69	40.05	54.00	-13.95	AVG
2	5460.00	40.67	-0.57	40.10	54.00	-13.90	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5775 MHz		
Polarization:	Vertical		
Remark:			

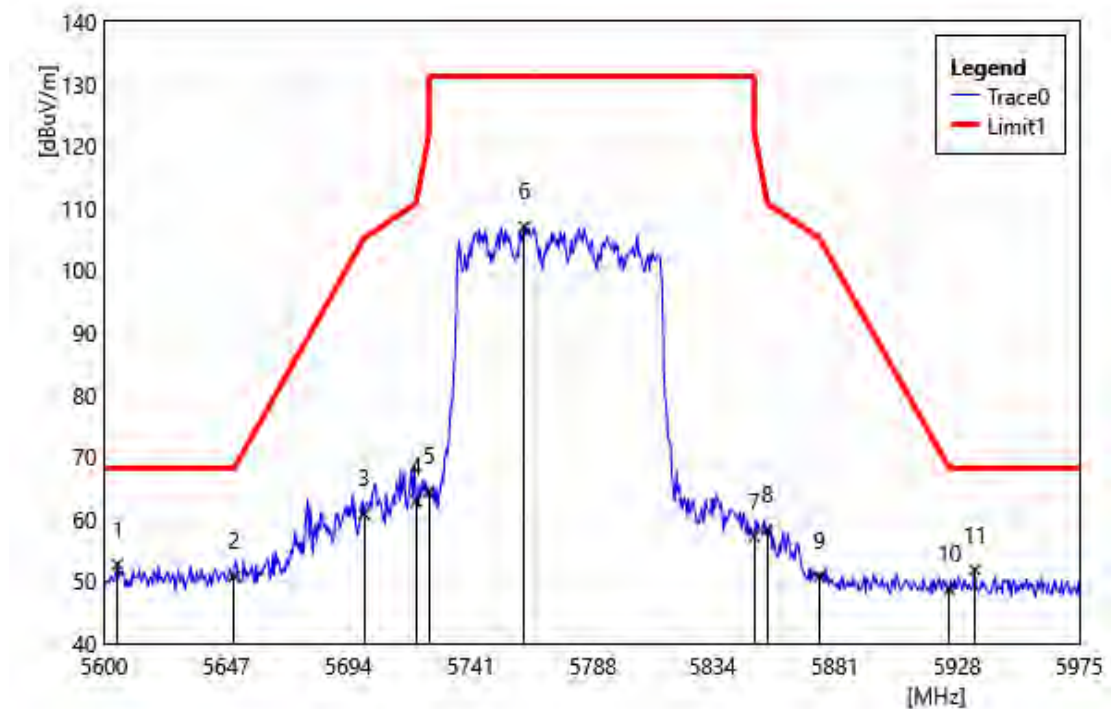

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5605.25	53.33	-0.58	52.75	68.20	-15.45	PEAK
2	5650.00	51.48	-0.64	50.84	68.20	-17.36	PEAK
3	5700.00	61.42	-0.61	60.81	105.20	-44.39	PEAK
4	5720.00	63.26	-0.40	62.86	110.80	-47.94	PEAK
5	5725.00	64.82	-0.34	64.48	122.20	-57.72	PEAK
6	5761.63	107.07	-0.03	107.04	131.20	-24.16	PEAK
7	5850.00	56.93	0.28	57.21	122.20	-64.99	PEAK
8	5855.00	58.07	0.29	58.36	110.80	-52.44	PEAK
9	5875.00	50.43	0.34	50.77	105.20	-54.43	PEAK
10	5925.00	48.37	0.28	48.65	68.20	-19.55	PEAK
11	5934.88	51.64	0.22	51.86	68.20	-16.34	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5775 MHz		
Polarization:	Horizontal		
Remark:			

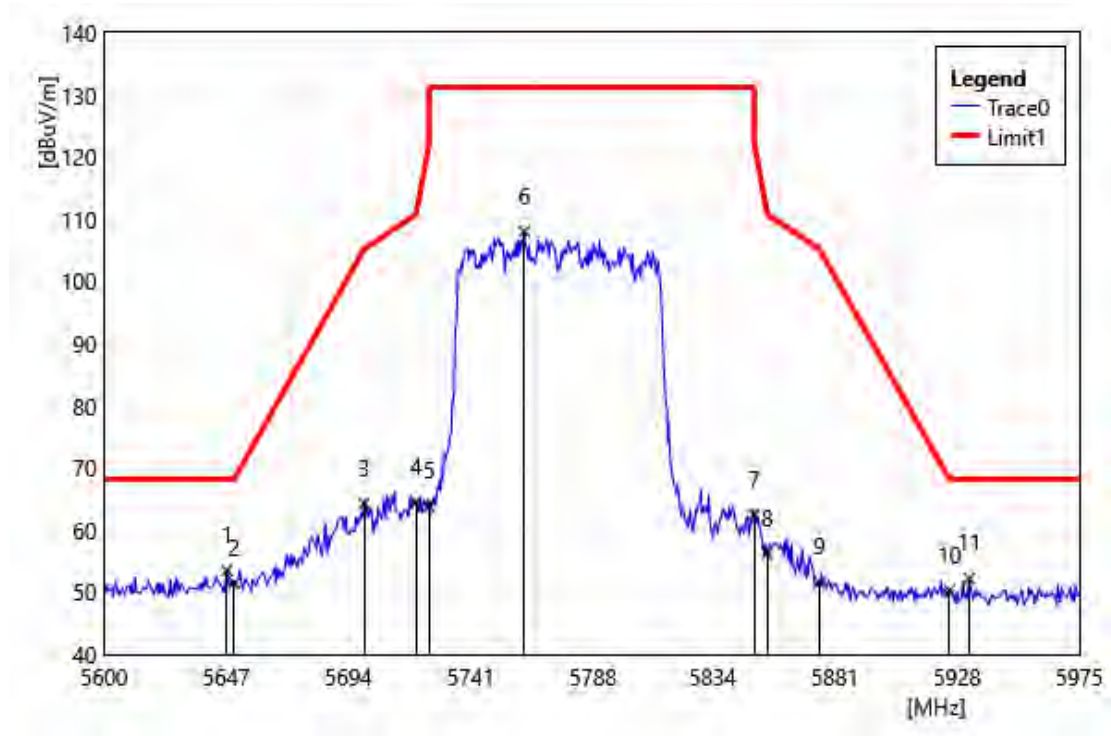

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5647.25	54.14	-0.64	53.50	68.20	-14.70	PEAK
2	5650.00	52.12	-0.64	51.48	68.20	-16.72	PEAK
3	5700.00	64.82	-0.61	64.21	105.20	-40.99	PEAK
4	5720.00	64.94	-0.40	64.54	110.80	-46.26	PEAK
5	5725.00	64.18	-0.34	63.84	122.20	-58.36	PEAK
6	5761.63	108.08	-0.03	108.05	131.20	-23.15	PEAK
7	5850.00	62.26	0.28	62.54	122.20	-59.66	PEAK
8	5855.00	55.97	0.29	56.26	110.80	-54.54	PEAK
9	5875.00	51.26	0.34	51.60	105.20	-53.60	PEAK
10	5925.00	50.03	0.28	50.31	68.20	-17.89	PEAK
11	5932.63	51.96	0.23	52.19	68.20	-16.01	PEAK

Duty cycle

Reference Appendix A / Appendix B

Maximum Conducted Output Power and Transmit power control Measurement

Reference Appendix A

26 dB RF Bandwidth Measurement & 99 % Occupied Bandwidth Measurement

Reference Appendix A / Appendix B

6 dB RF Bandwidth Measurement

Reference Appendix A / Appendix B

Maximum Power Spectral Density Measurement

Reference Appendix A / Appendix B

---END---