



Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE160 6505		
	MHz		
Polarization:	Horizontal		
Remark:			

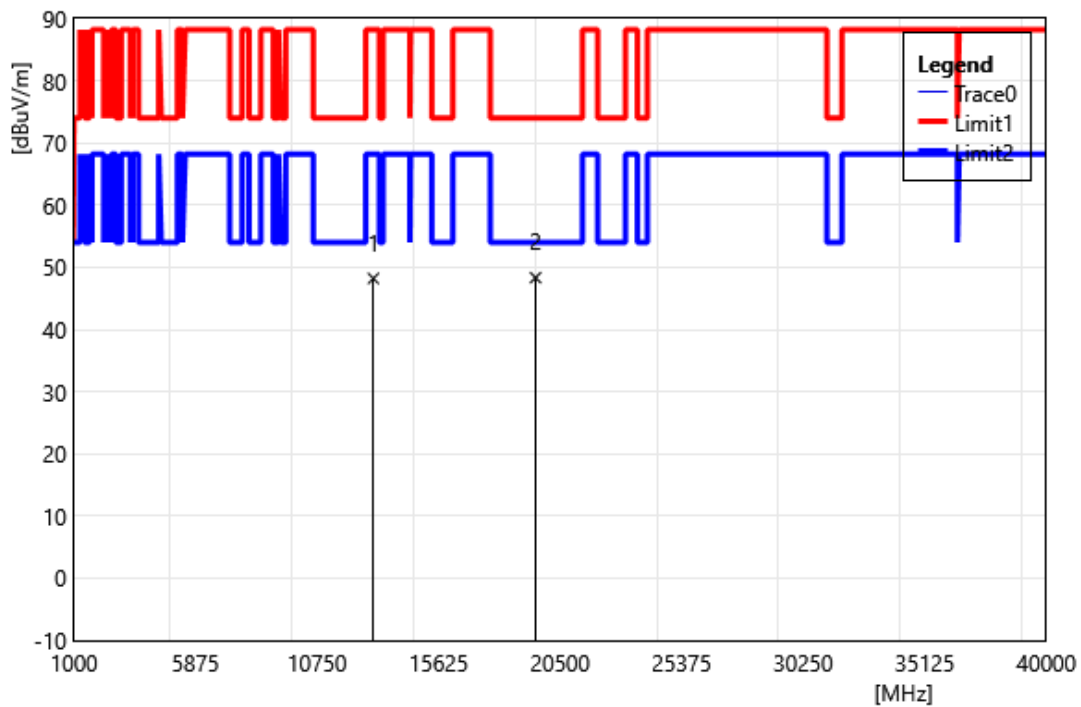


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13010.00	35.19	13.03	48.22	88.20	-39.98	PEAK
2	19515.00	32.54	15.80	48.34	74.00	-25.66	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE160 6665		
	MHz		
Polarization:	Vertical		
Remark:			

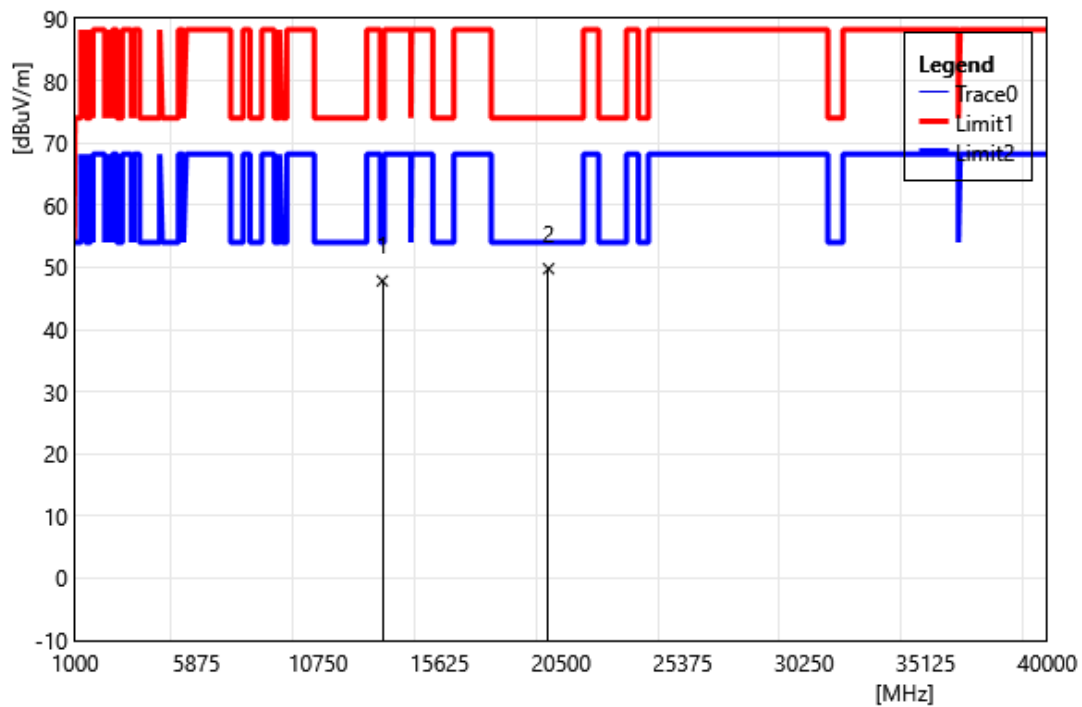


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13330.00	34.34	13.48	47.82	74.00	-26.18	PEAK
2	19995.00	33.25	16.53	49.78	74.00	-24.22	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE160 6665		
	MHz		
Polarization:	Horizontal		
Remark:			

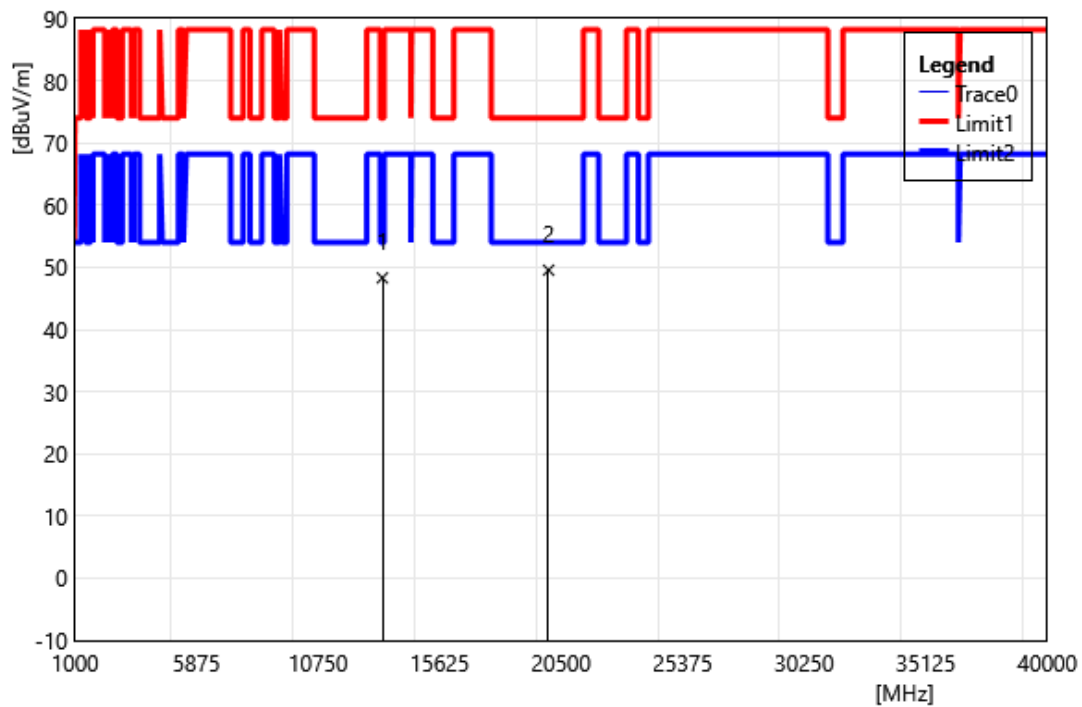


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13330.00	34.82	13.48	48.30	74.00	-25.70	PEAK
2	19995.00	33.02	16.53	49.55	74.00	-24.45	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE160 6825		
	MHz		
Polarization:	Vertical		
Remark:			

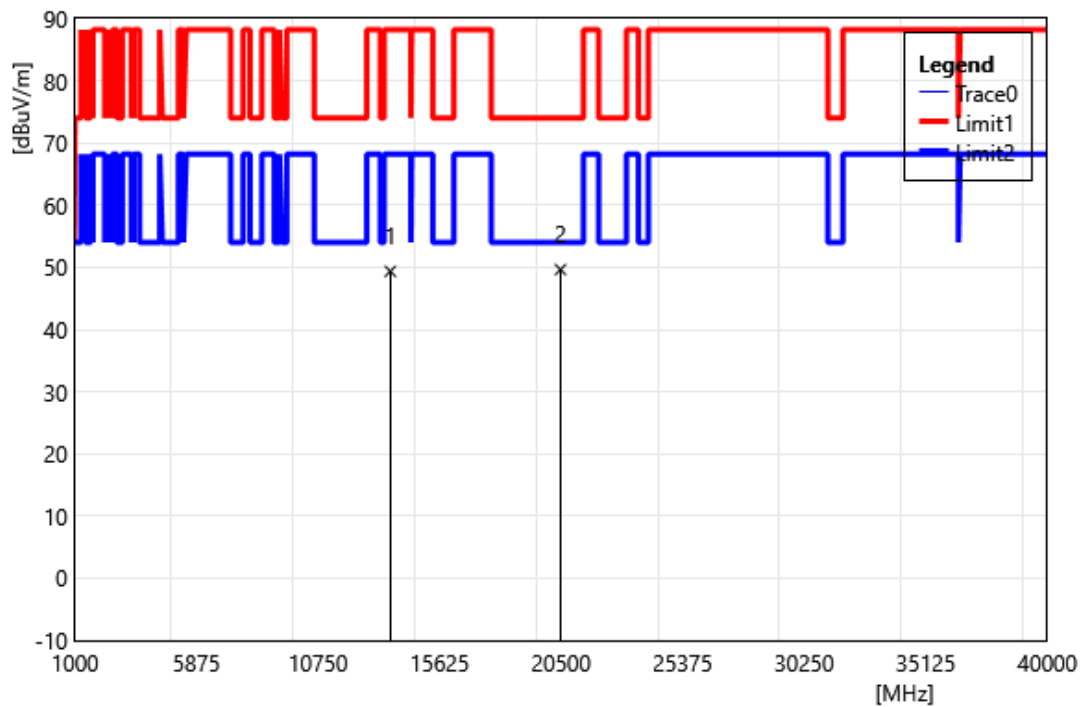


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13650.00	34.84	14.51	49.35	88.20	-38.85	PEAK
2	20475.00	32.89	16.76	49.65	74.00	-24.35	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE160 6825		
	MHz		
Polarization:	Horizontal		
Remark:			

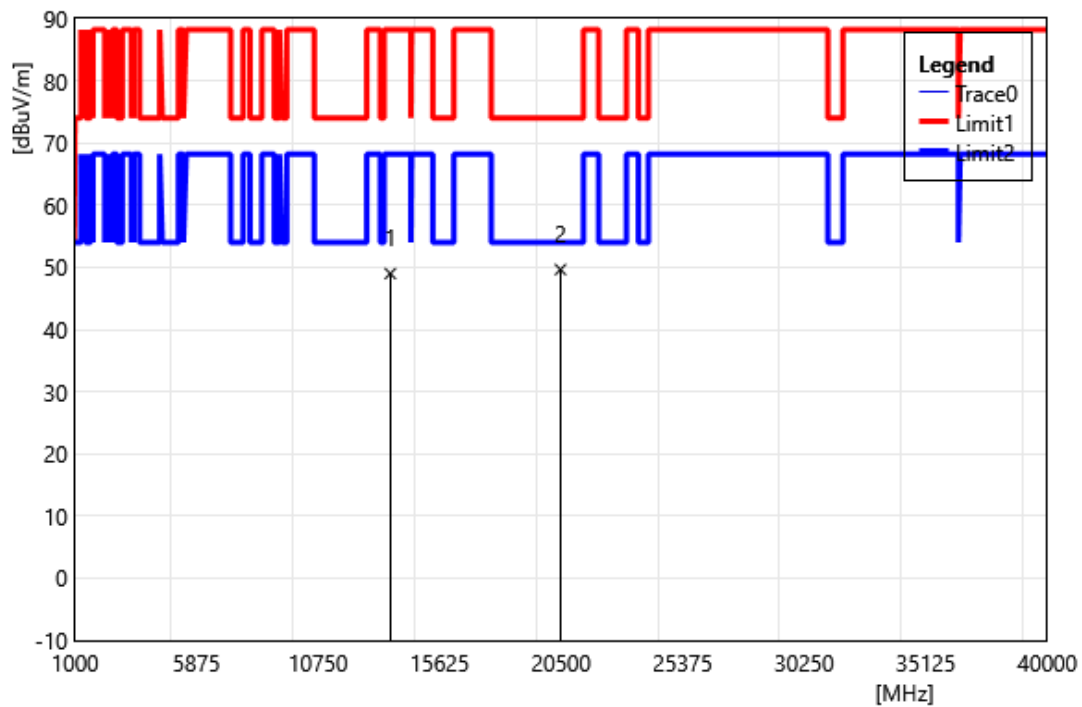


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13650.00	34.49	14.51	49.00	88.20	-39.20	PEAK
2	20475.00	32.89	16.76	49.65	74.00	-24.35	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE160 6985		
	MHz		
Polarization:	Vertical		
Remark:			

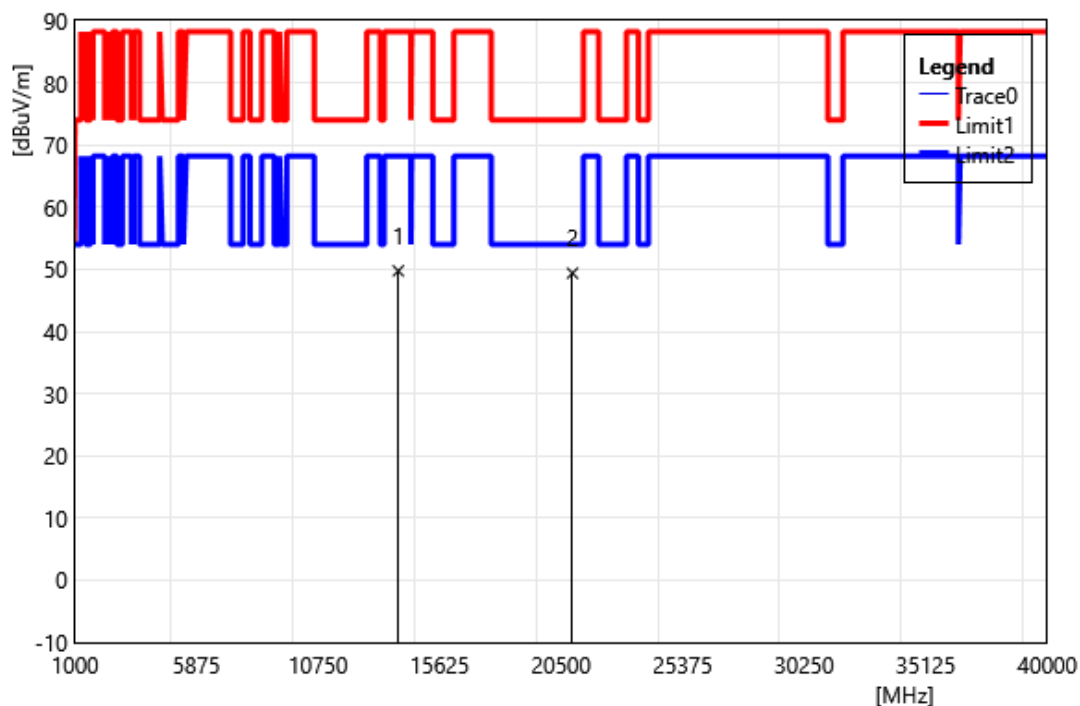


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13970.00	34.91	14.85	49.76	88.20	-38.44	PEAK
2	20955.00	32.30	17.08	49.38	74.00	-24.62	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE160 6985		
	MHz		
Polarization:	Horizontal		
Remark:			

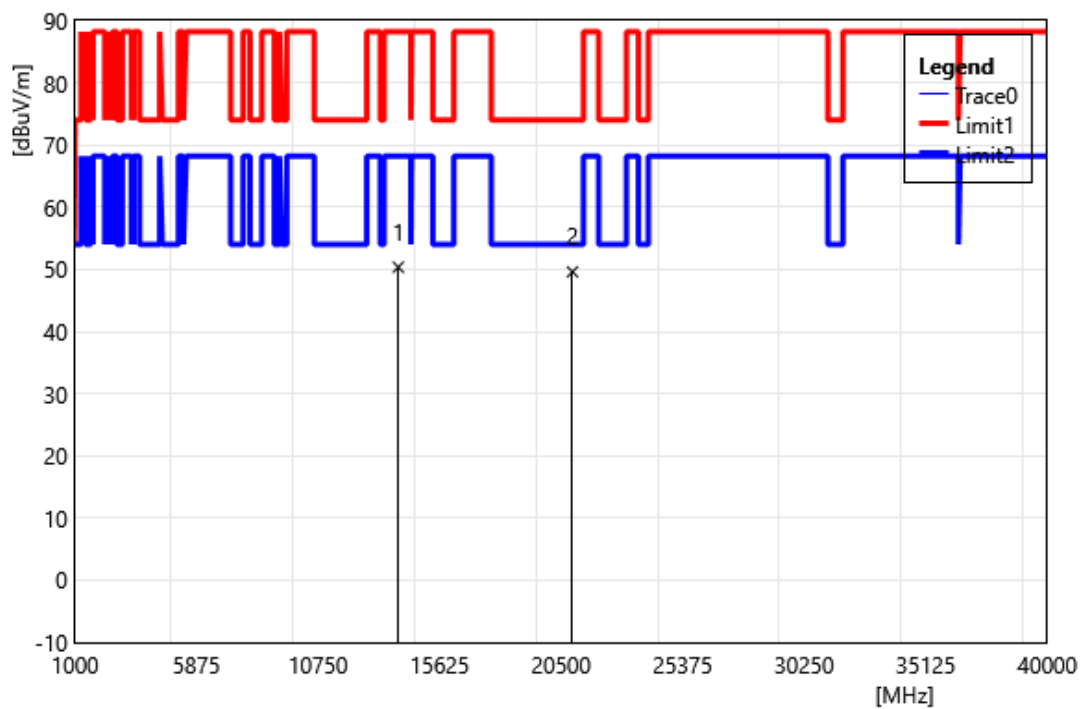


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13970.00	35.48	14.85	50.33	88.20	-37.87	PEAK
2	20955.00	32.52	17.08	49.60	74.00	-24.40	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	Co-location (WLAN 2.4 GHz + 5 GHz + 6 GHz + BLE)		
Polarization:	Vertical		
Remark:			

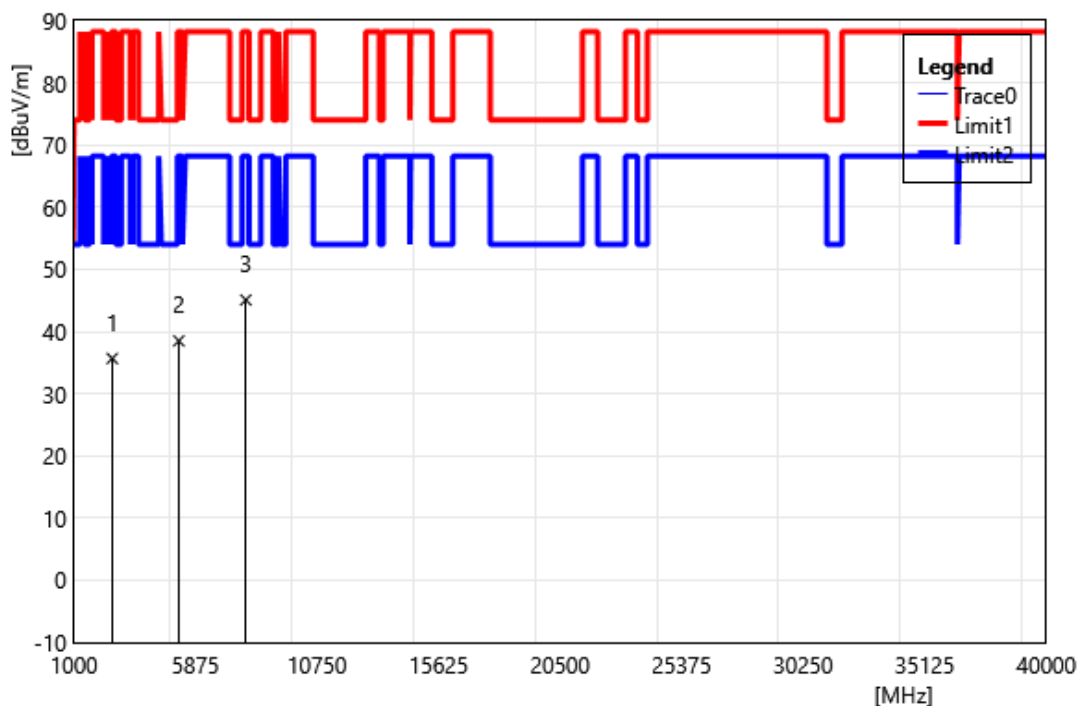

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2537.00	43.49	-7.83	35.66	88.20	-52.54	PEAK
2	5207.00	39.70	-1.20	38.50	88.20	-49.70	PEAK
3	7896.00	38.78	6.30	45.08	88.20	-43.12	PEAK


Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	Co-location (WLAN 2.4 GHz + 5 GHz + 6 GHz + BLE)		
Polarization:	Horizontal		
Remark:			

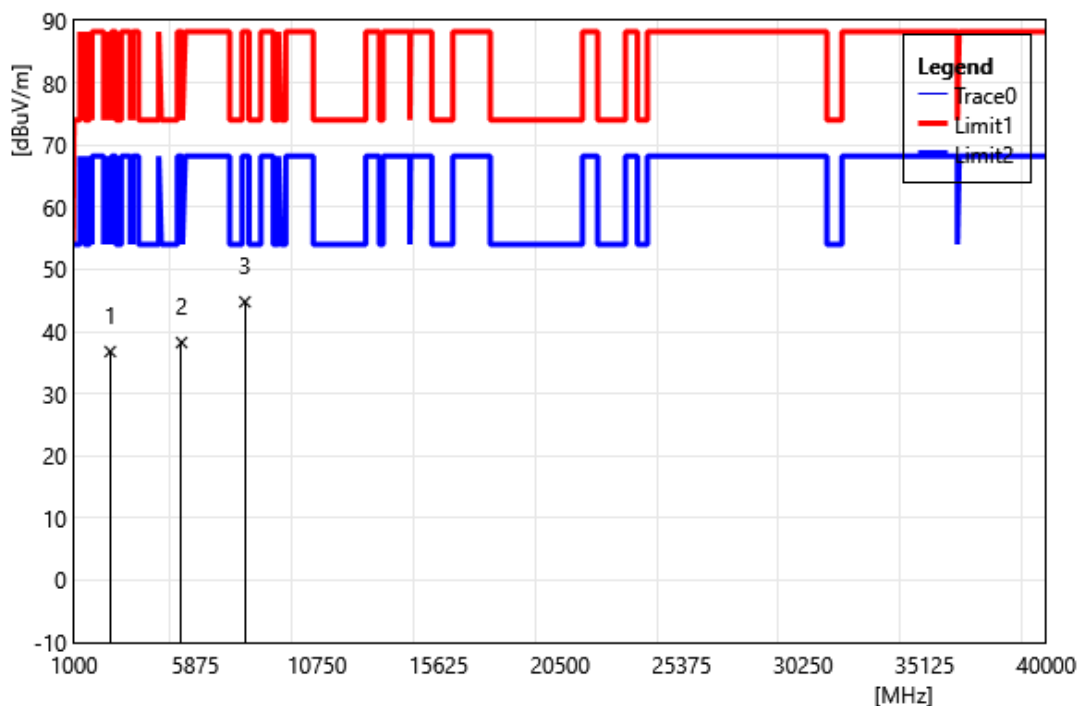

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	2457.00	44.43	-7.66	36.77	88.20	-51.43	PEAK
2	5317.00	39.75	-1.53	38.22	88.20	-49.98	PEAK
3	7859.00	38.72	6.05	44.77	88.20	-43.43	PEAK


Band Edge

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5955		
	MHz		
Polarization:	Vertical		
Remark:			

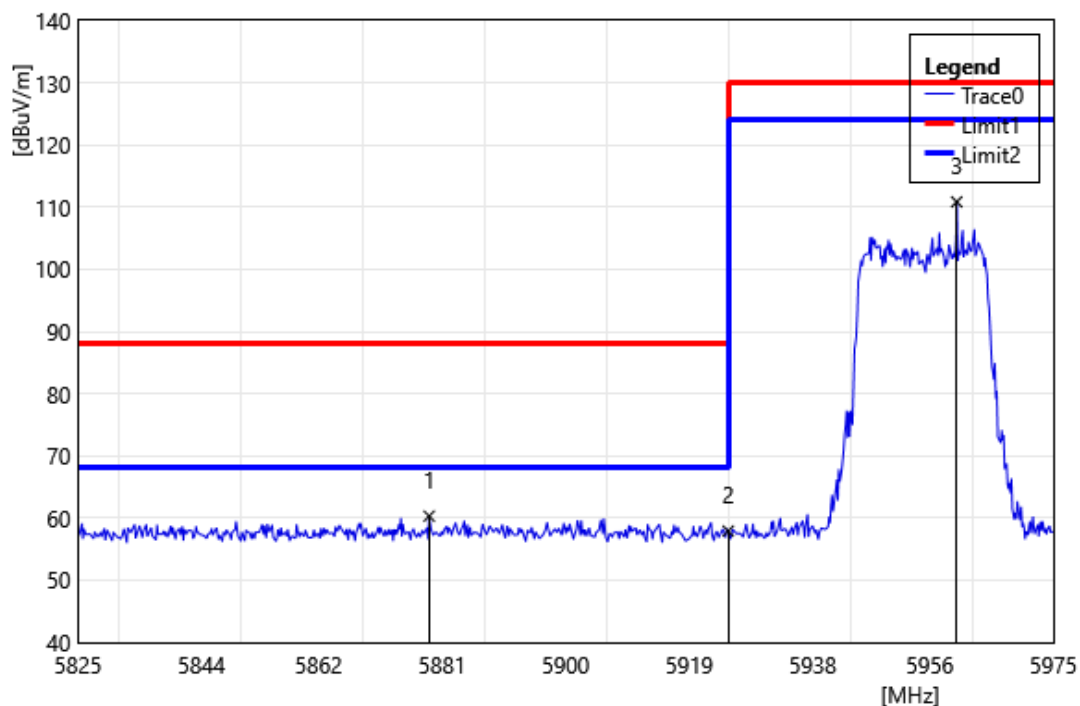


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5879.00	59.95	0.36	60.31	88.20	-27.89	PEAK
2	5925.00	57.64	0.28	57.92	88.20	-30.28	PEAK
3	5960.15	110.68	0.17	110.86	130.00	-19.15	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5955		
	MHz		
Polarization:	Horizontal		
Remark:			

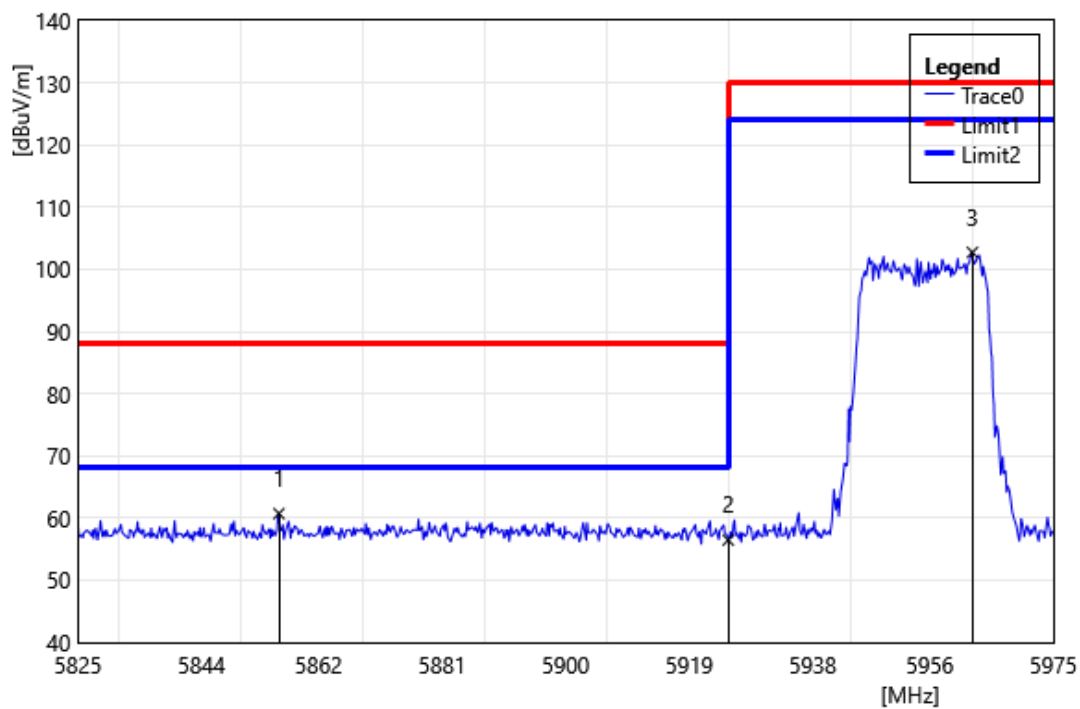


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5855.90	60.42	0.30	60.72	88.20	-27.48	PEAK
2	5925.00	56.17	0.28	56.45	88.20	-31.75	PEAK
3	5962.55	102.57	0.17	102.74	130.00	-27.26	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 7095		
	MHz		
Polarization:	Vertical		
Remark:			

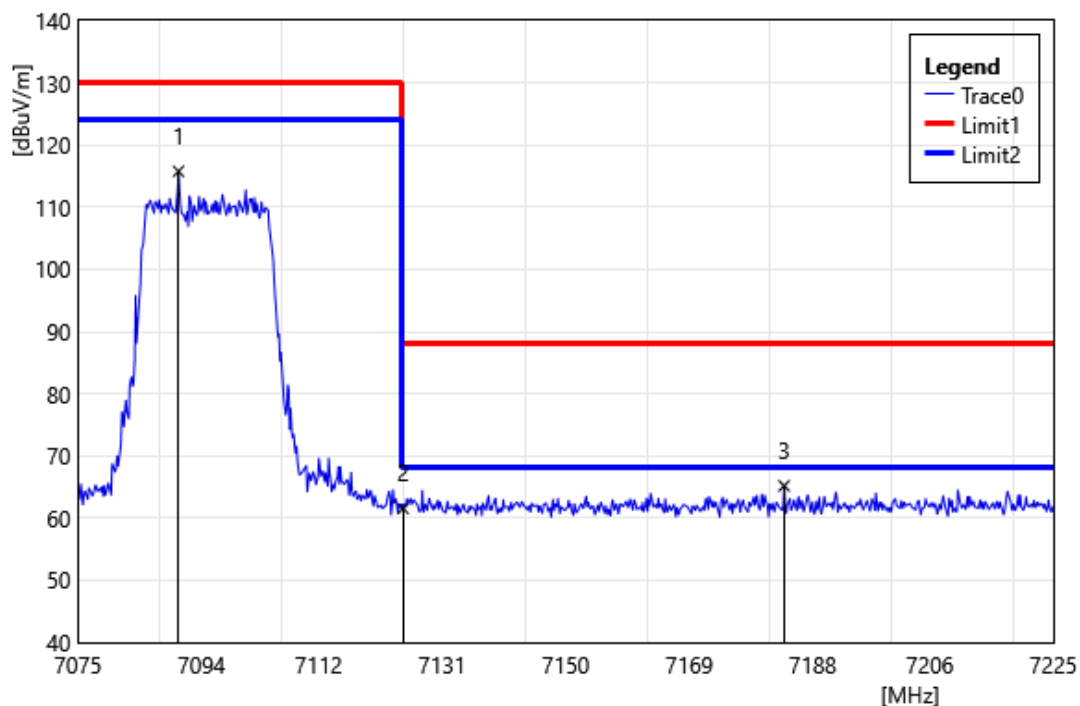


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7090.45	110.92	4.84	115.77	130.00	-14.24	PEAK
2	7125.00	56.55	4.99	61.54	88.20	-26.66	PEAK
3	7183.60	59.97	5.21	65.18	88.20	-23.02	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 7095		
	MHz		
Polarization:	Horizontal		
Remark:			

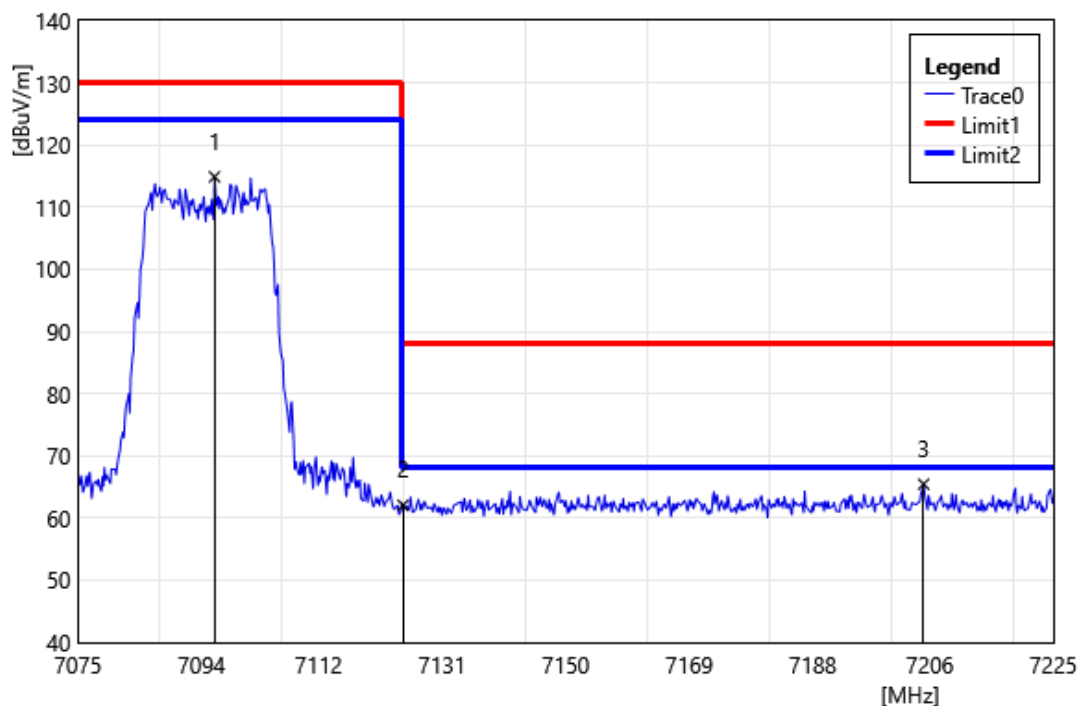


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7096.00	109.99	4.89	114.88	130.00	-15.12	PEAK
2	7125.00	57.07	4.99	62.06	88.20	-26.14	PEAK
3	7205.05	60.16	5.30	65.46	88.20	-22.74	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 7115		
	MHz		
Polarization:	Vertical		
Remark:			

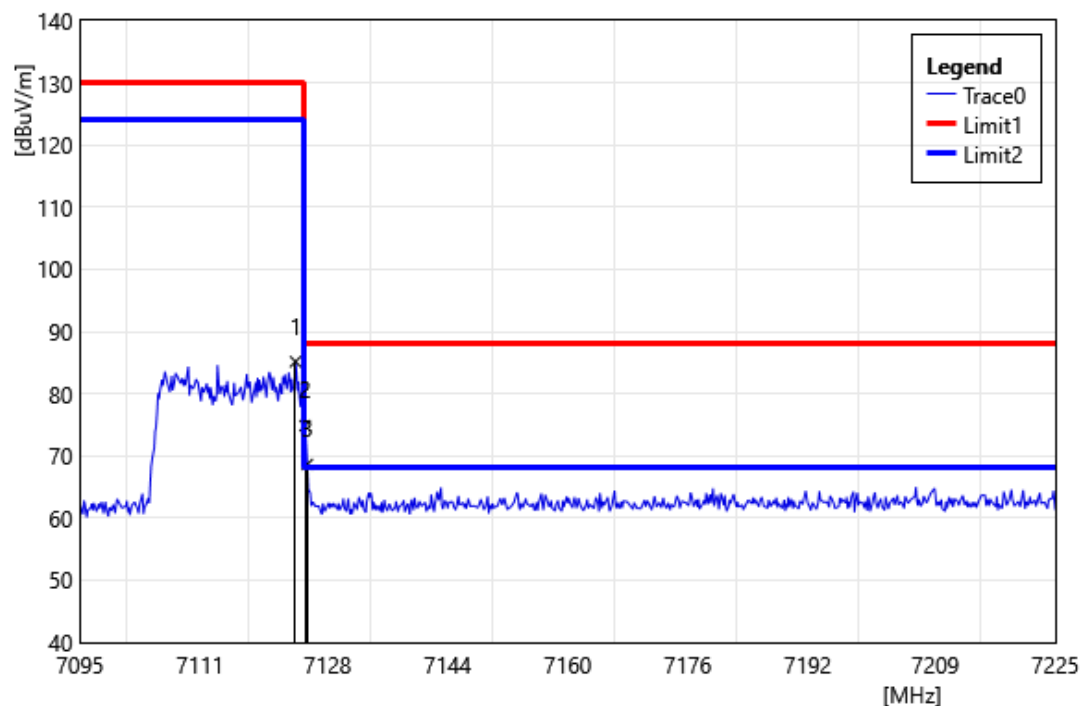


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7123.73	80.17	4.98	85.15	130.00	-44.85	PEAK
2	7125.00	69.86	4.99	74.85	88.20	-13.35	PEAK
3	7125.29	63.63	4.99	68.62	88.20	-19.58	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 7115		
	MHz		
Polarization:	Horizontal		
Remark:			

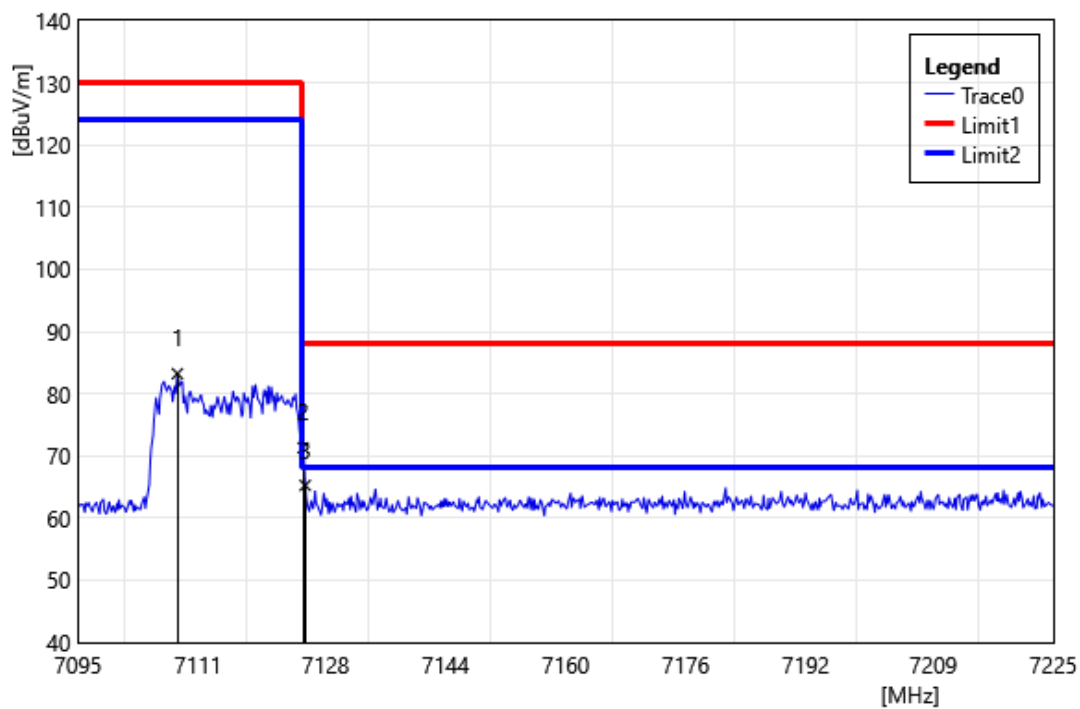


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7108.26	78.28	4.94	83.22	130.00	-46.78	PEAK
2	7125.00	66.30	4.99	71.29	88.20	-16.91	PEAK
3	7125.29	60.27	4.99	65.26	88.20	-22.94	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 7115		
	MHz		
Polarization:	Vertical		
Remark:			

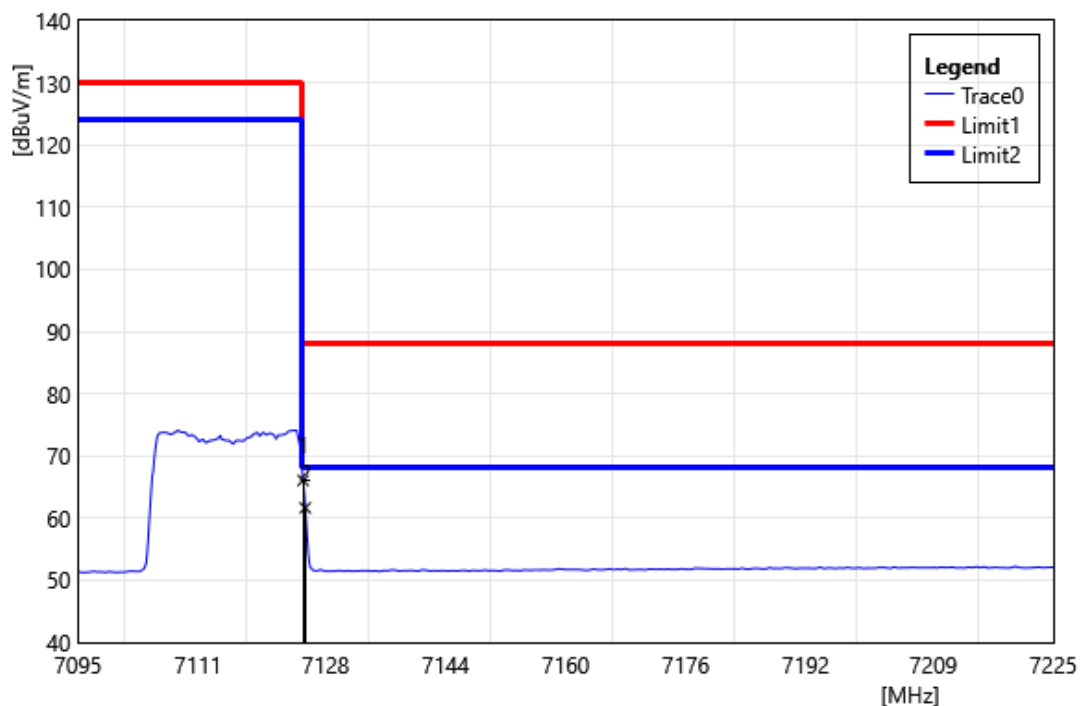


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	61.06	4.99	66.05	68.20	-2.15	AVG
2	7125.29	56.65	4.99	61.64	68.20	-6.56	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 7115		
	MHz		
Polarization:	Horizontal		
Remark:			

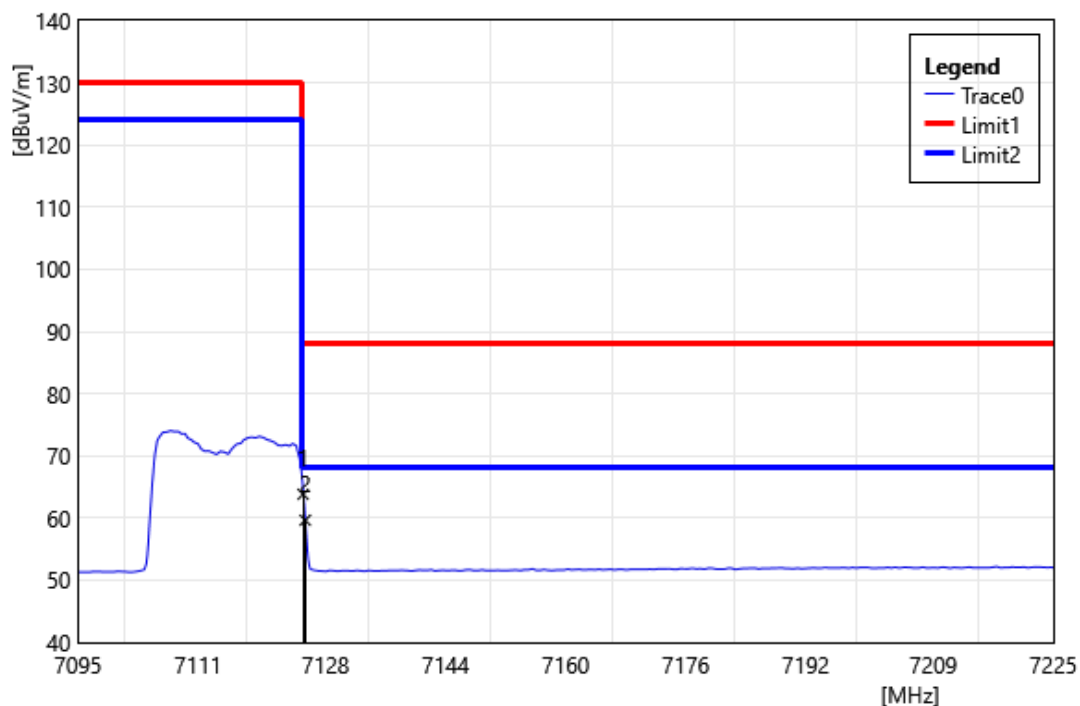


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	58.84	4.99	63.83	68.20	-4.37	AVG
2	7125.29	54.66	4.99	59.65	68.20	-8.55	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5965		
	MHz		
Polarization:	Vertical		
Remark:			

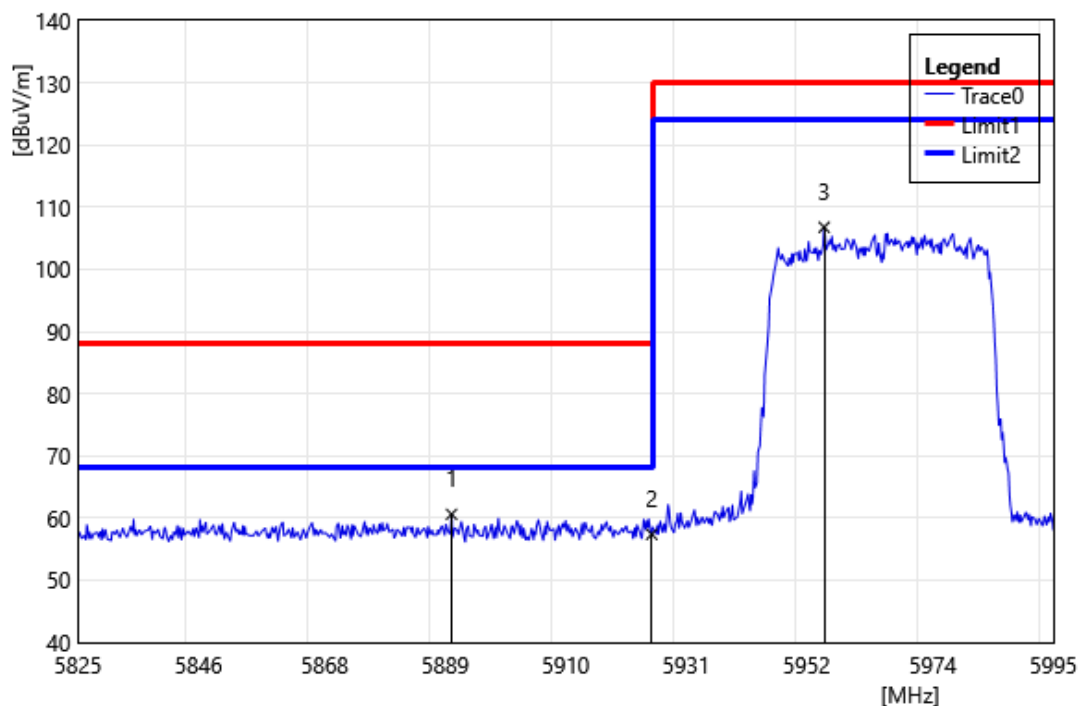


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5890.11	60.21	0.38	60.59	88.20	-27.61	PEAK
2	5925.00	57.11	0.28	57.39	88.20	-30.81	PEAK
3	5955.05	106.63	0.15	106.78	130.00	-23.22	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5965		
	MHz		
Polarization:	Horizontal		
Remark:			

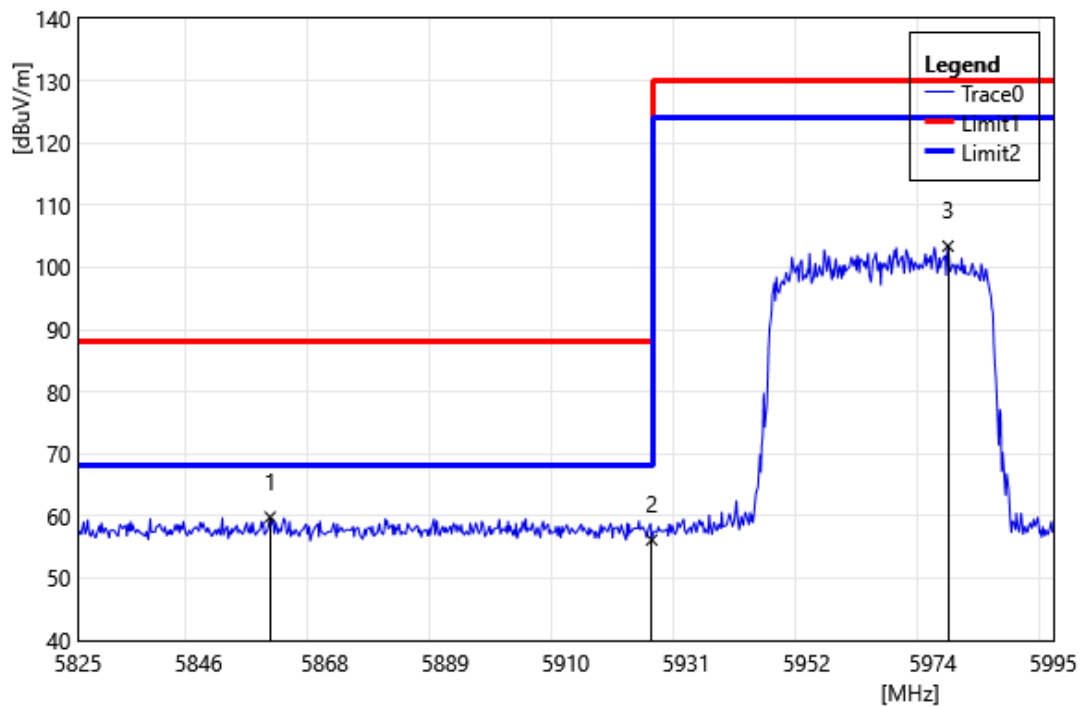


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5858.49	59.52	0.30	59.82	88.20	-28.38	PEAK
2	5925.00	55.88	0.28	56.16	88.20	-32.04	PEAK
3	5976.64	103.20	0.21	103.41	130.00	-26.59	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 7085		
	MHz		
Polarization:	Vertical		
Remark:			

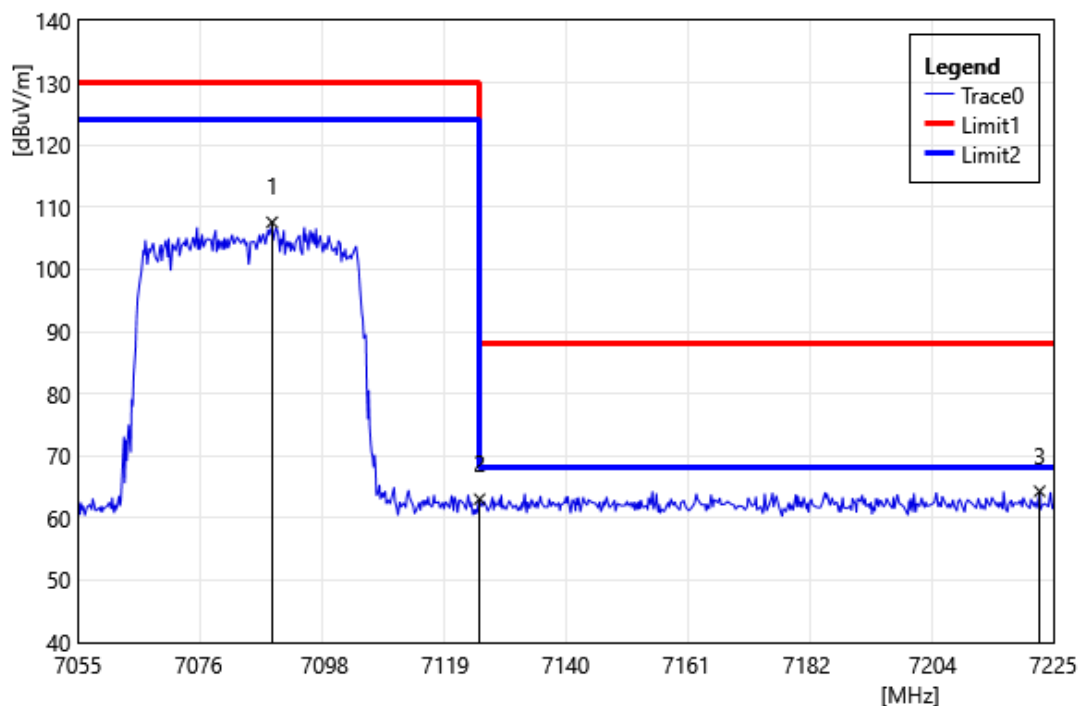


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7088.83	102.76	4.82	107.58	130.00	-22.42	PEAK
2	7125.00	58.04	4.99	63.03	88.20	-25.17	PEAK
3	7222.62	58.98	5.34	64.32	88.20	-23.88	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 7085		
	MHz		
Polarization:	Horizontal		
Remark:			

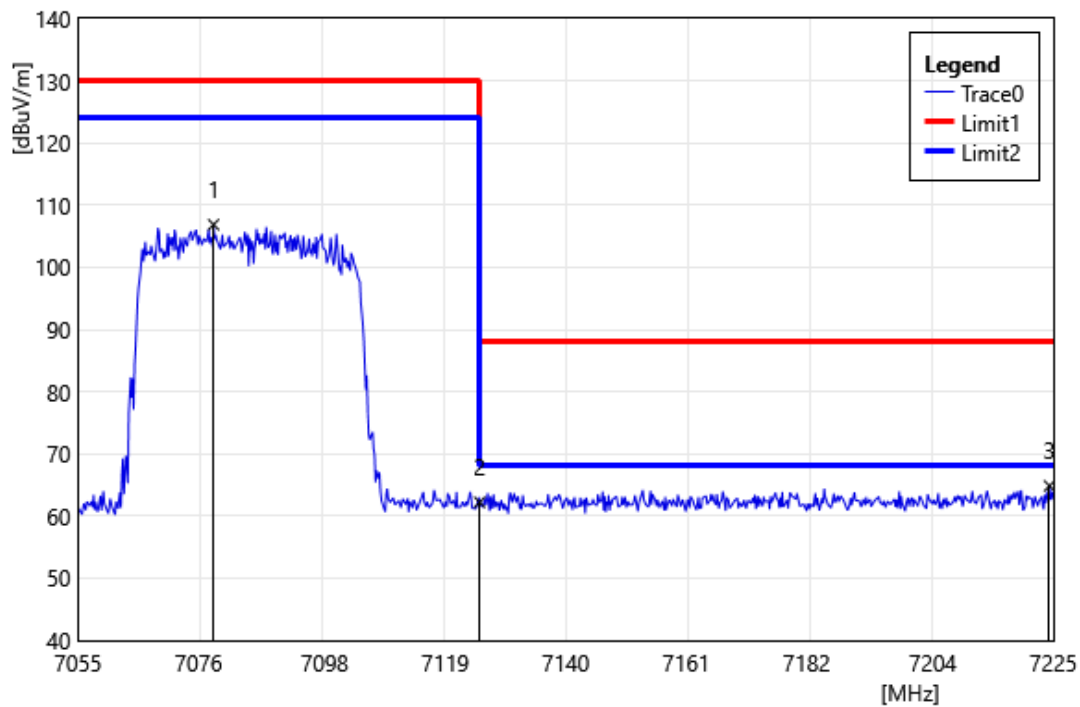


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7078.63	102.13	4.74	106.87	130.00	-23.13	PEAK
2	7125.00	57.23	4.99	62.22	88.20	-25.98	PEAK
3	7224.32	59.51	5.35	64.86	88.20	-23.34	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5985		
	MHz		
Polarization:	Vertical		
Remark:			

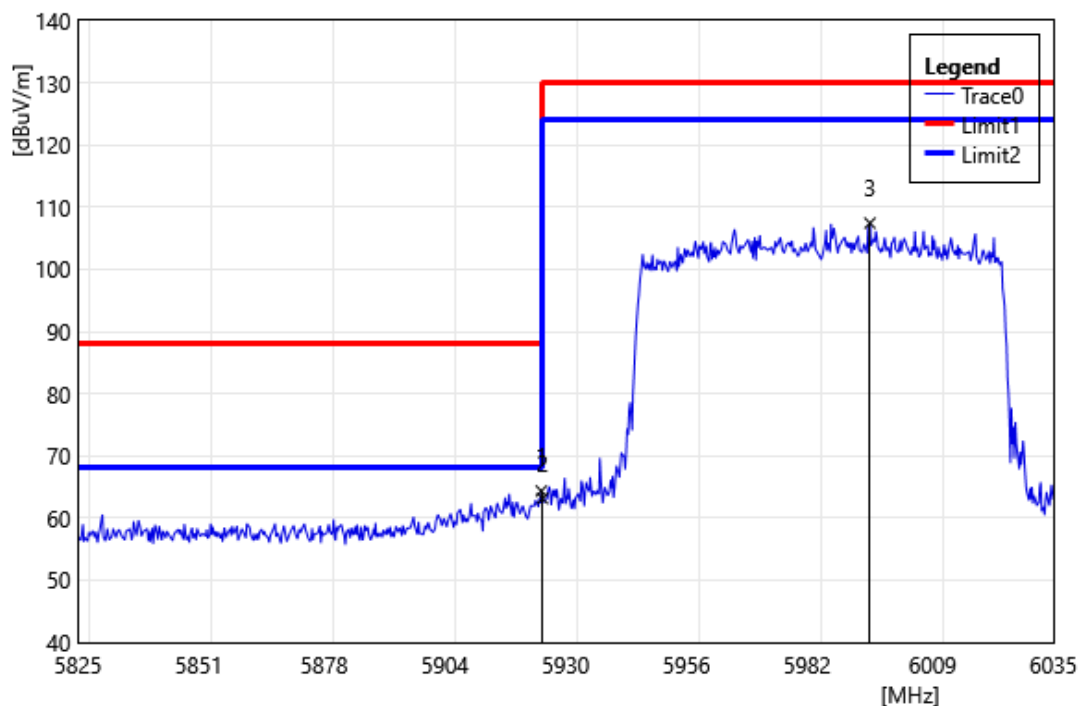


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5924.75	64.08	0.28	64.36	88.20	-23.85	PEAK
2	5925.00	62.89	0.28	63.17	88.20	-25.03	PEAK
3	5995.52	107.18	0.26	107.44	130.00	-22.56	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5985		
	MHz		
Polarization:	Horizontal		
Remark:			

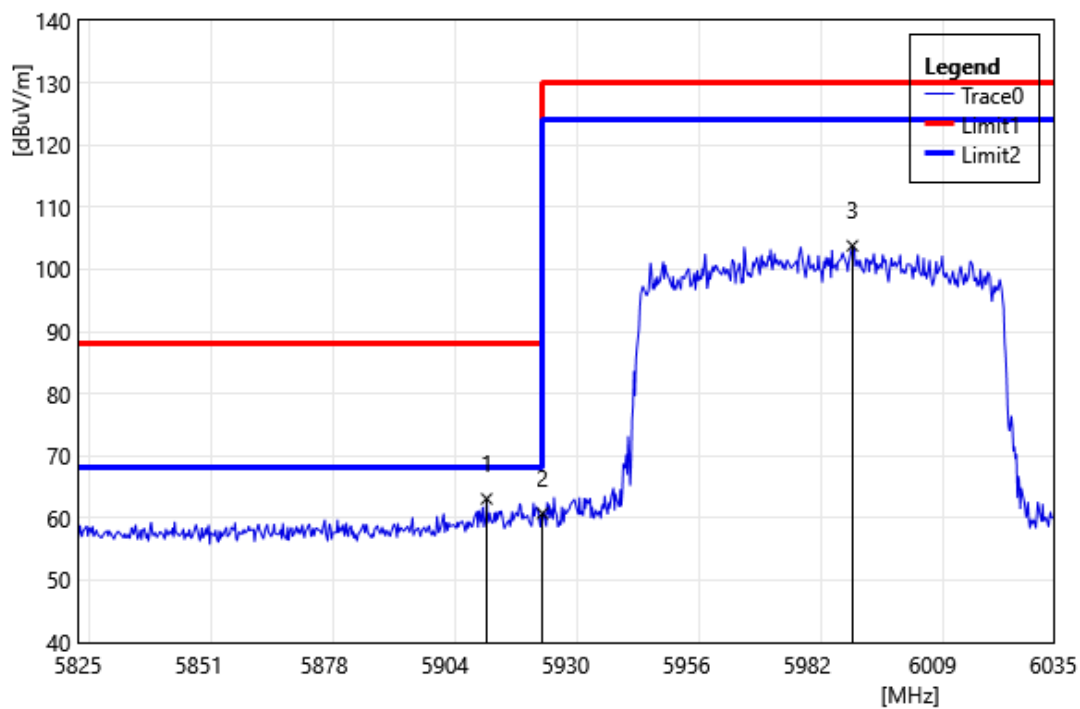


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5912.99	62.75	0.34	63.09	88.20	-25.11	PEAK
2	5925.00	60.46	0.28	60.74	88.20	-27.46	PEAK
3	5991.74	103.54	0.25	103.79	130.00	-26.21	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 7025		
	MHz		
Polarization:	Vertical		
Remark:			

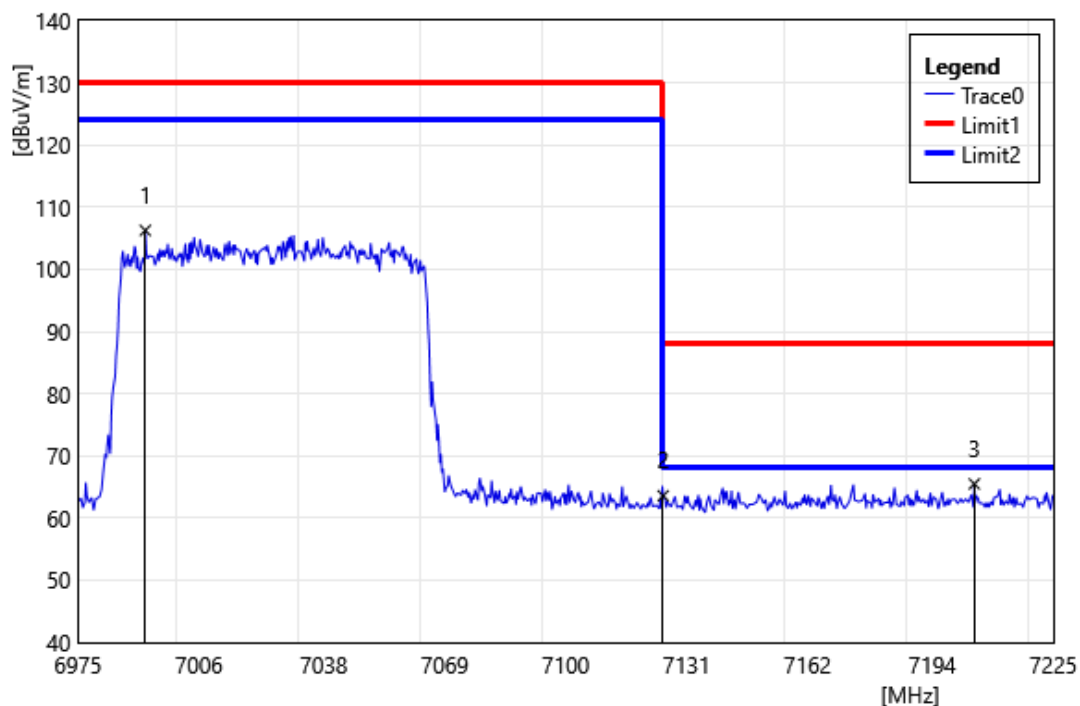


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	6992.25	102.13	4.14	106.27	130.00	-23.73	PEAK
2	7125.00	58.60	4.99	63.59	88.20	-24.61	PEAK
3	7204.75	60.20	5.29	65.49	88.20	-22.71	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 7025		
	MHz		
Polarization:	Horizontal		
Remark:			

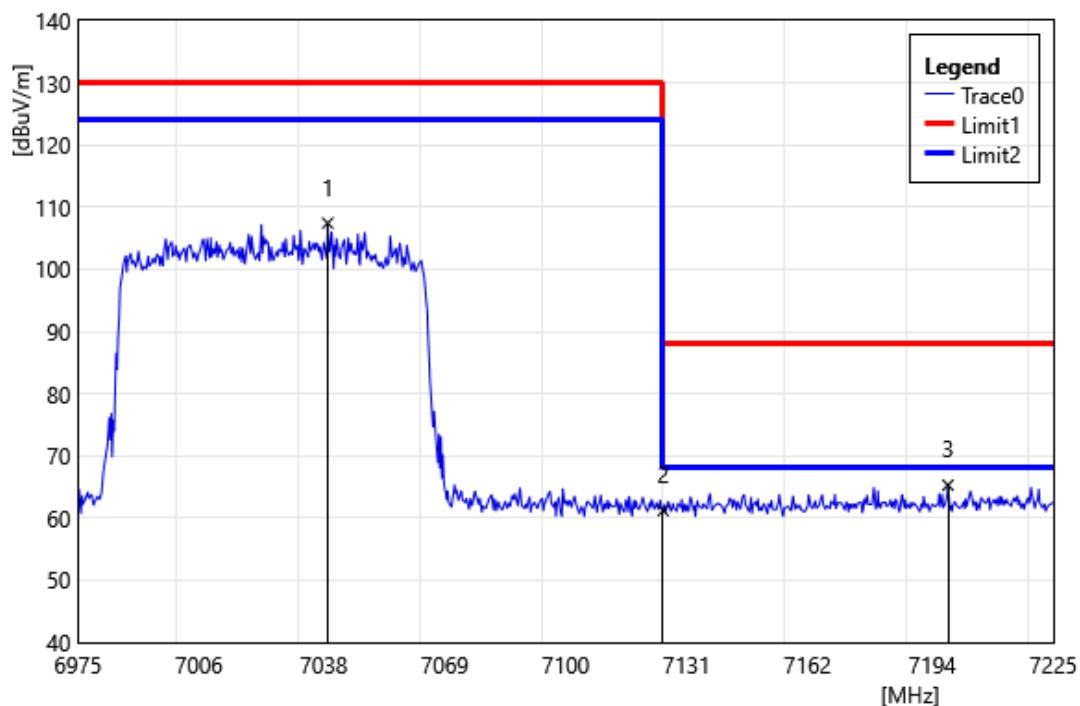


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7039.00	103.01	4.42	107.43	130.00	-22.57	PEAK
2	7125.00	56.22	4.99	61.21	88.20	-26.99	PEAK
3	7198.00	60.02	5.27	65.29	88.20	-22.91	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE160 6025		
	MHz		
Polarization:	Vertical		
Remark:			

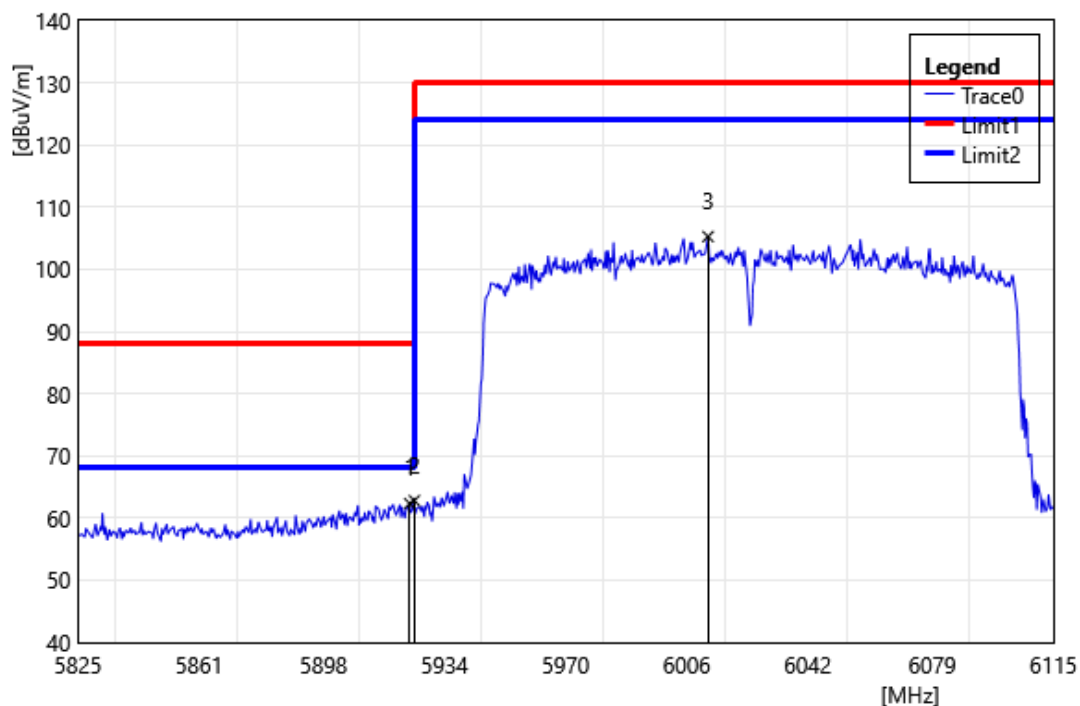


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5923.60	62.06	0.28	62.34	88.20	-25.86	PEAK
2	5925.00	62.53	0.28	62.81	88.20	-25.39	PEAK
3	6012.34	104.96	0.31	105.27	130.00	-24.73	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE160 6025		
	MHz		
Polarization:	Horizontal		
Remark:			

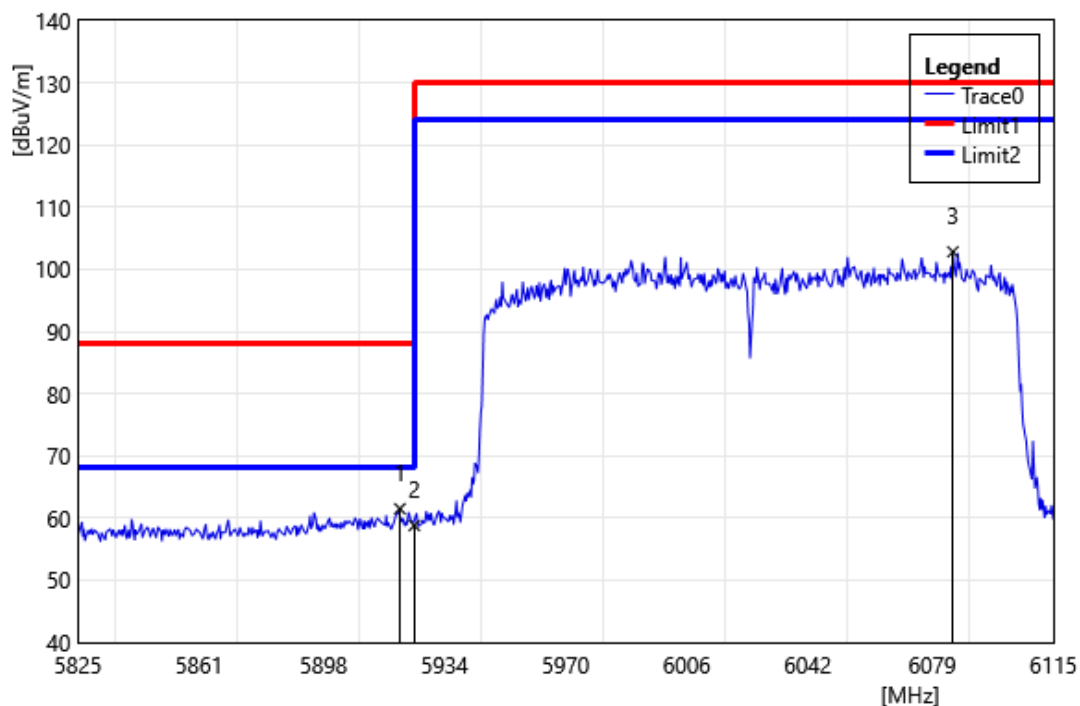


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5920.70	61.20	0.30	61.50	88.20	-26.70	PEAK
2	5925.00	58.53	0.28	58.81	88.20	-29.39	PEAK
3	6085.13	102.22	0.61	102.84	130.00	-27.17	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE160 6985		
	MHz		
Polarization:	Vertical		
Remark:			

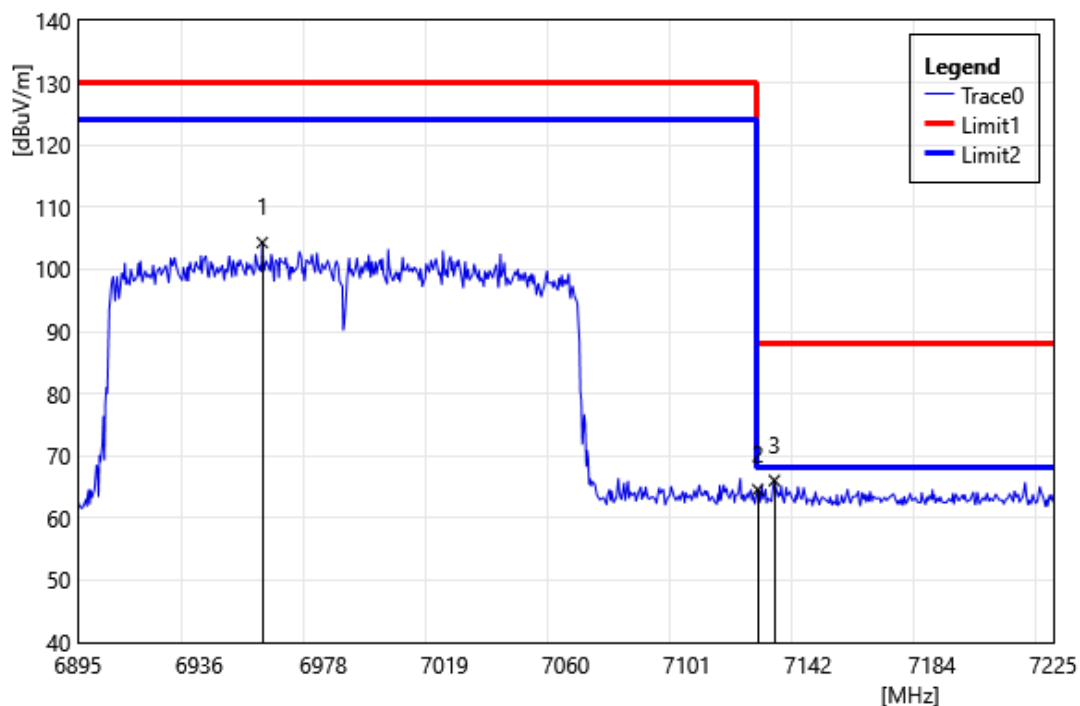

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	6957.37	100.27	4.03	104.30	130.00	-25.70	PEAK
2	7125.00	59.56	4.99	64.55	88.20	-23.65	PEAK
3	7130.62	61.04	5.00	66.04	88.20	-22.16	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE160 6985		
	MHz		
Polarization:	Horizontal		
Remark:			

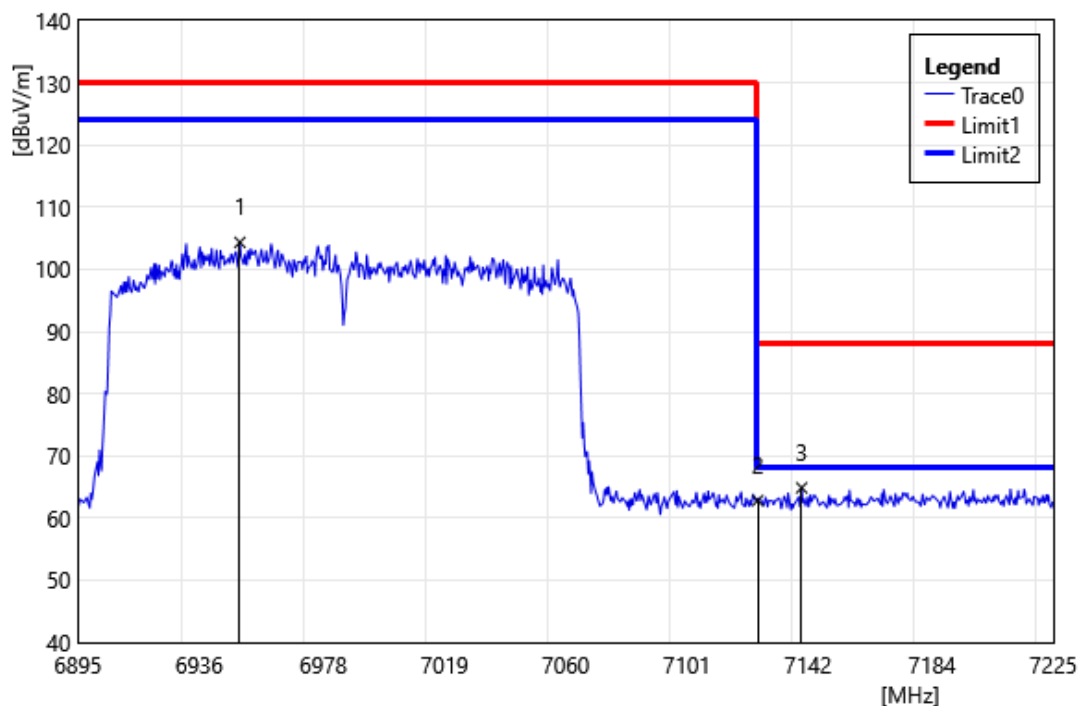


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	6949.78	100.34	4.00	104.34	130.00	-25.66	PEAK
2	7125.00	57.82	4.99	62.81	88.20	-25.39	PEAK
3	7139.86	59.83	5.03	64.86	88.20	-23.34	PEAK

Beamforming on


Below 1 GHz

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	Transmit Mode		
Polarization:	Vertical		
Remark:			

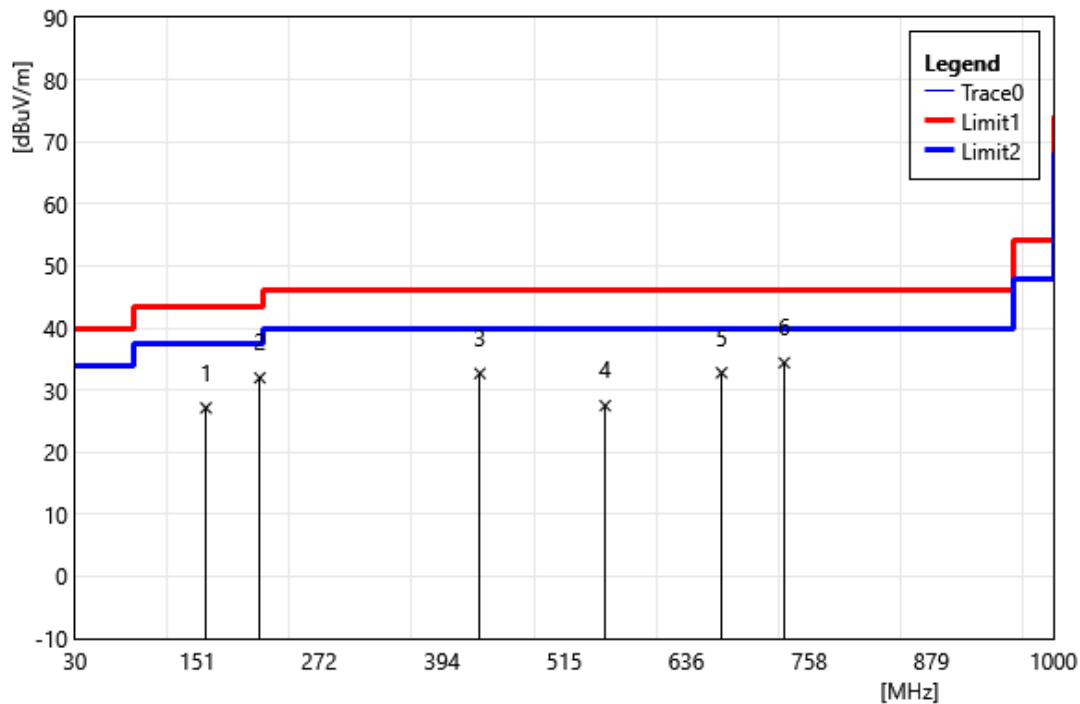

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	159.98	34.06	-6.92	27.14	43.50	-16.36	QP
2	213.33	41.57	-9.58	31.99	43.50	-11.51	QP
3	431.58	35.83	-3.14	32.69	46.00	-13.31	QP
4	555.74	28.36	-0.86	27.50	46.00	-18.50	QP
5	671.17	31.50	1.29	32.79	46.00	-13.21	QP
6	733.25	31.49	2.92	34.41	46.00	-11.59	QP

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	Transmit Mode		
Polarization:	Horizontal		
Remark:			

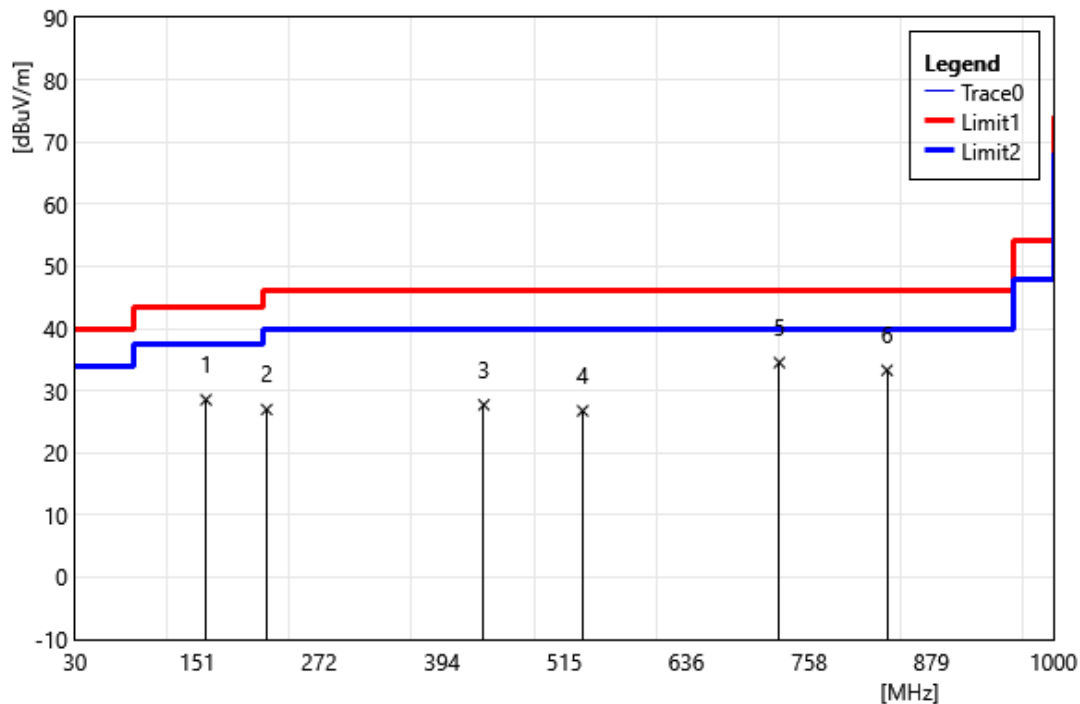


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	159.98	35.46	-6.92	28.54	43.50	-14.96	QP
2	220.12	36.43	-9.44	26.99	46.00	-19.01	QP
3	435.46	30.75	-3.03	27.72	46.00	-18.28	QP
4	533.43	28.32	-1.56	26.76	46.00	-19.24	QP
5	728.40	31.72	2.80	34.52	46.00	-11.49	QP
6	835.10	28.49	4.80	33.29	46.00	-12.71	QP

Harmonic


Above 1 GHz

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5955		
	MHz		
Polarization:	Vertical		
Remark:			

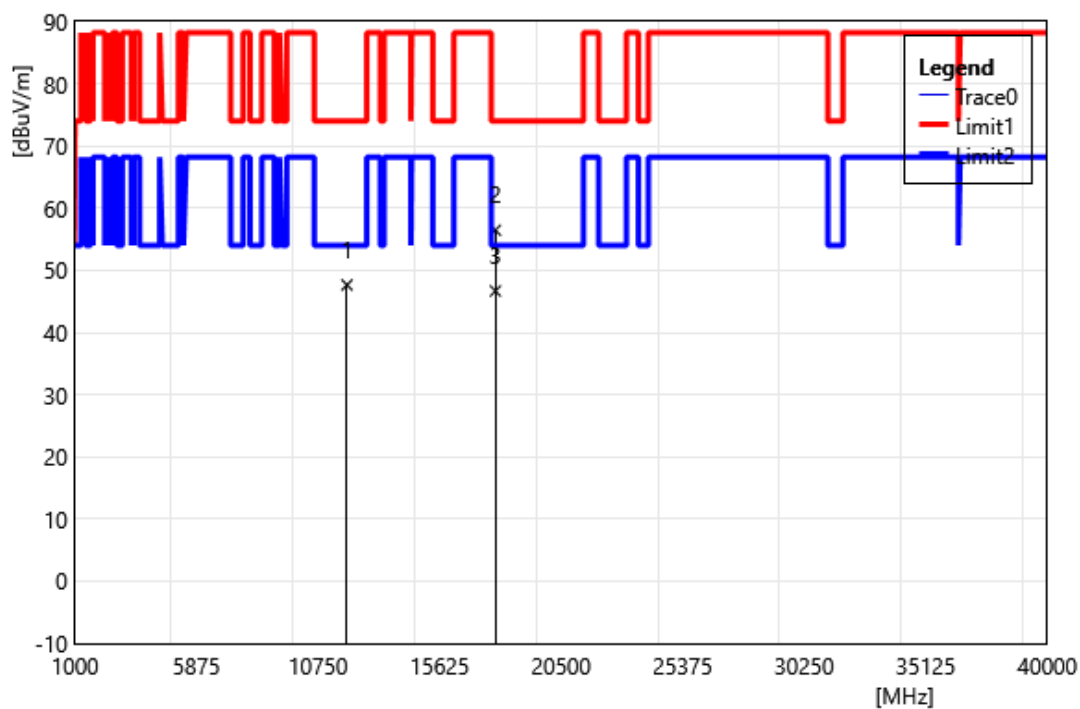


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11910.00	35.99	11.66	47.65	74.00	-26.35	PEAK
2	17865.00	32.32	24.14	56.46	74.00	-17.54	PEAK
3	17865.00	22.55	24.14	46.69	54.00	-7.31	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5955		
	MHz		
Polarization:	Horizontal		
Remark:			

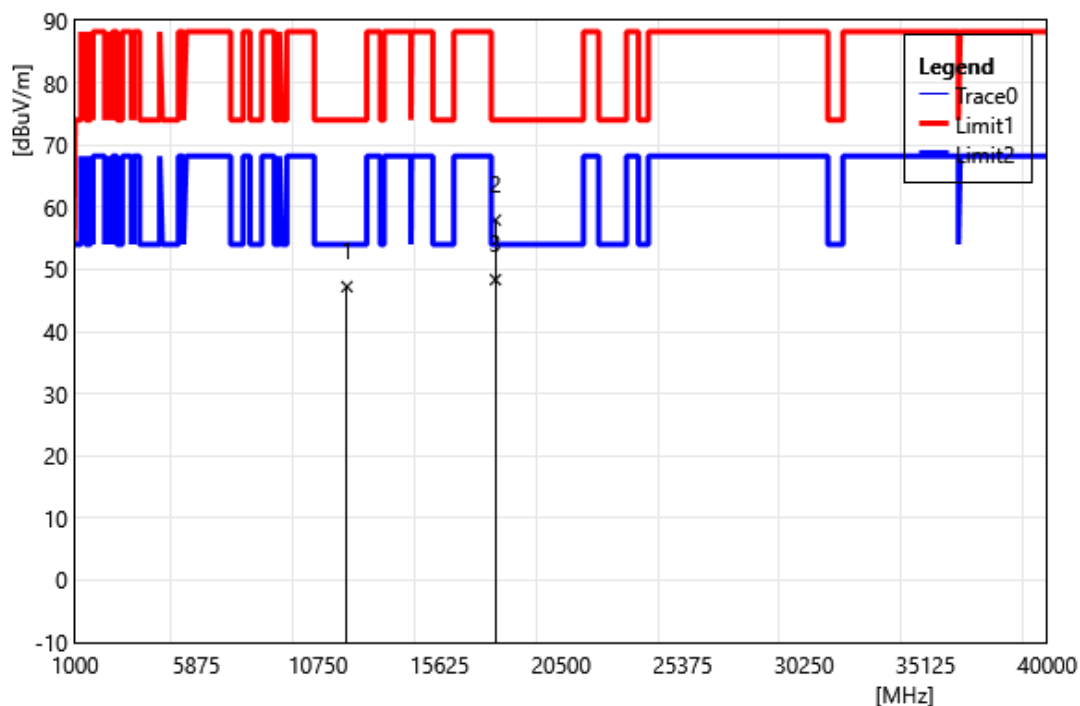


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11910.00	35.56	11.66	47.22	74.00	-26.78	PEAK
2	17865.00	33.79	24.14	57.93	74.00	-16.07	PEAK
3	17865.00	24.20	24.14	48.34	54.00	-5.66	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 6175		
	MHz		
Polarization:	Vertical		
Remark:			

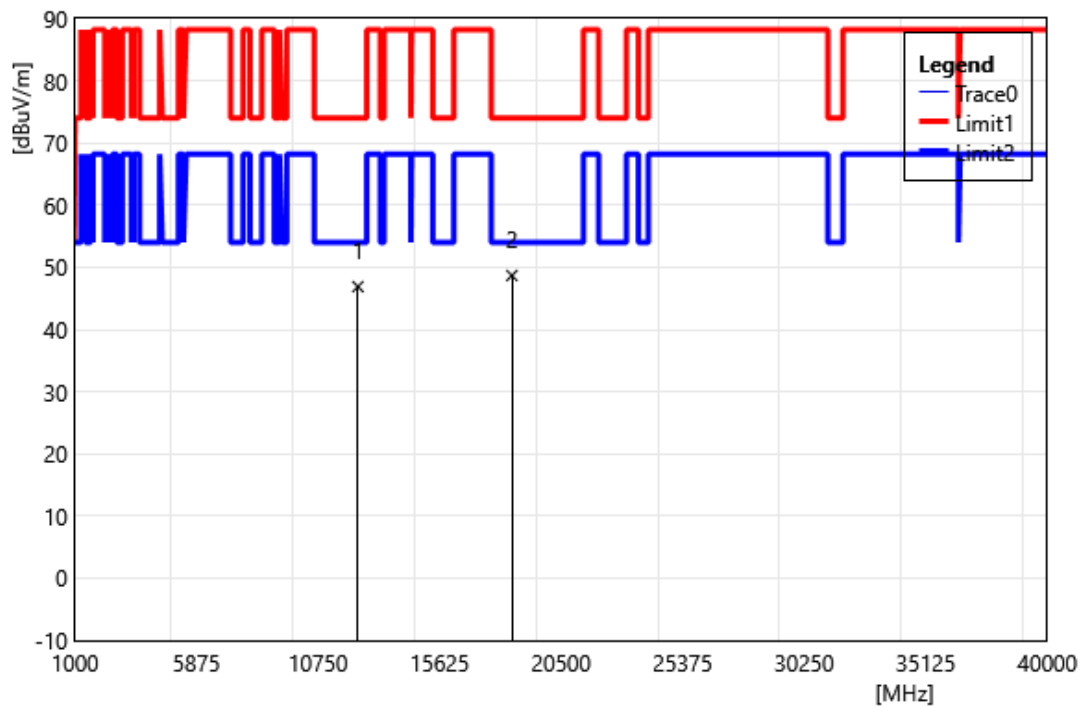


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12350.00	35.19	11.71	46.90	74.00	-27.10	PEAK
2	18525.00	33.77	14.91	48.68	74.00	-25.32	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 6175		
	MHz		
Polarization:	Horizontal		
Remark:			

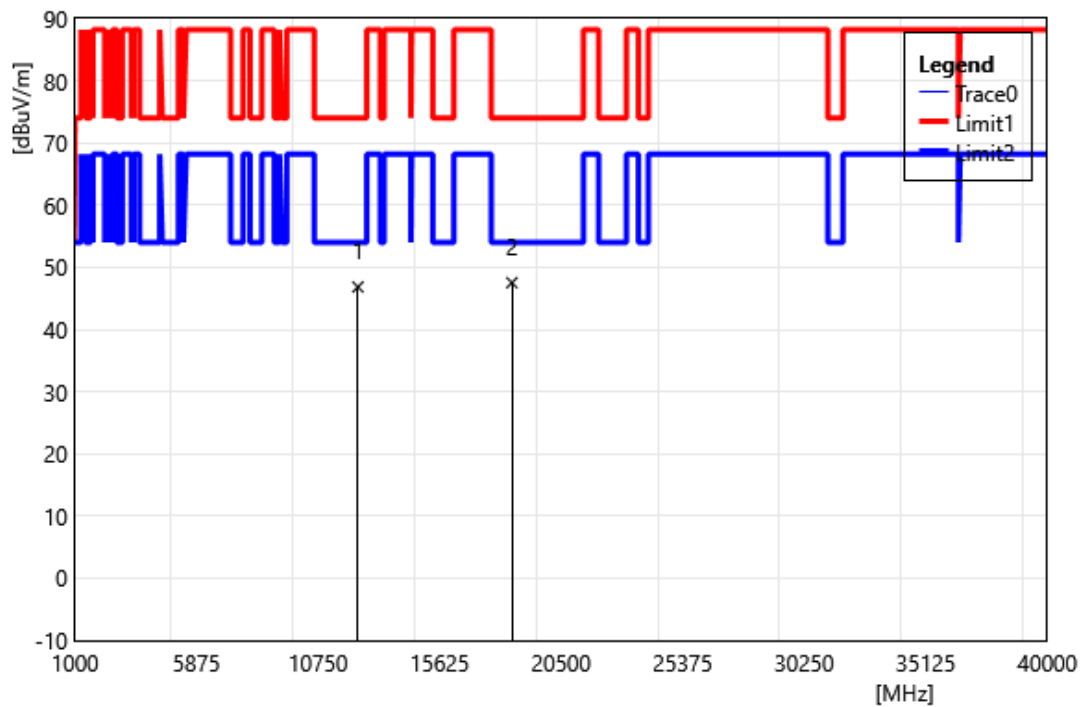


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12350.00	35.13	11.71	46.84	74.00	-27.16	PEAK
2	18525.00	32.62	14.91	47.53	74.00	-26.47	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 6415		
	MHz		
Polarization:	Vertical		
Remark:			

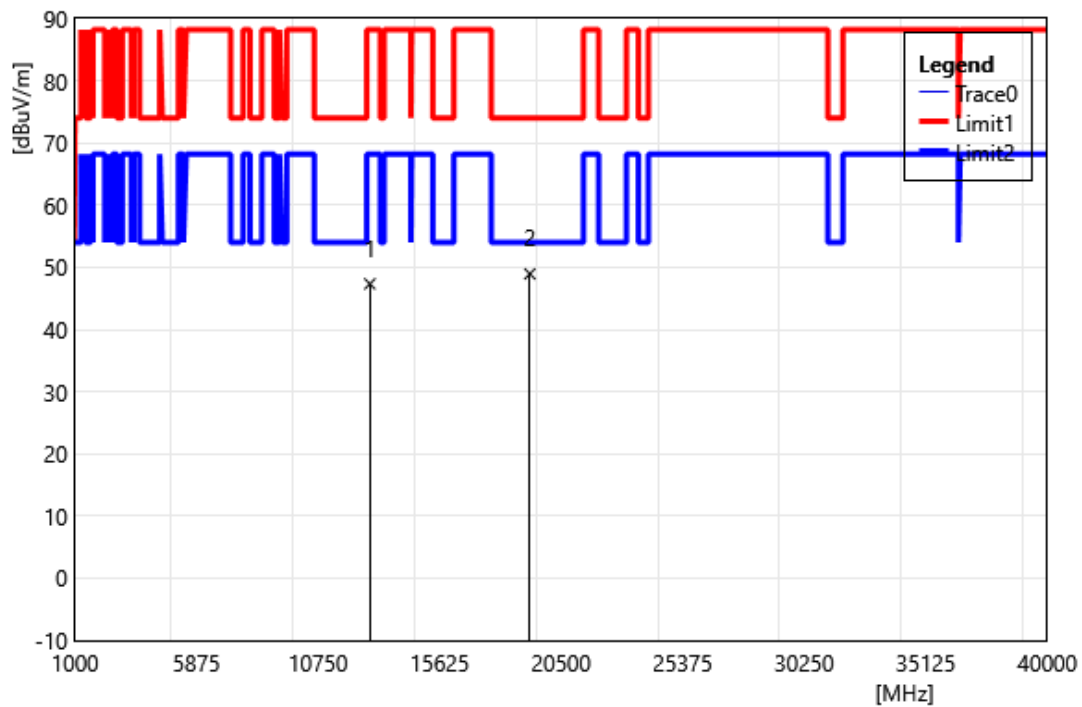


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12830.00	34.57	12.77	47.34	88.20	-40.86	PEAK
2	19245.00	32.90	16.04	48.94	74.00	-25.06	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 6415		
	MHz		
Polarization:	Horizontal		
Remark:			

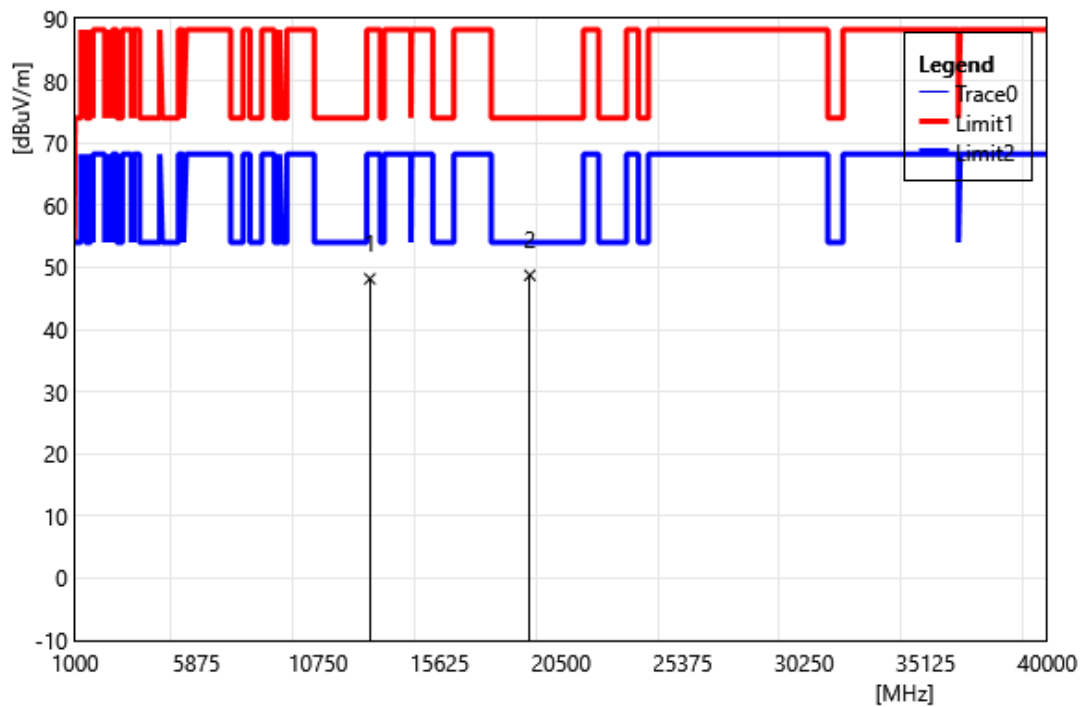


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12830.00	35.40	12.77	48.17	88.20	-40.03	PEAK
2	19245.00	32.68	16.04	48.72	74.00	-25.28	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 6435		
	MHz		
Polarization:	Vertical		
Remark:			

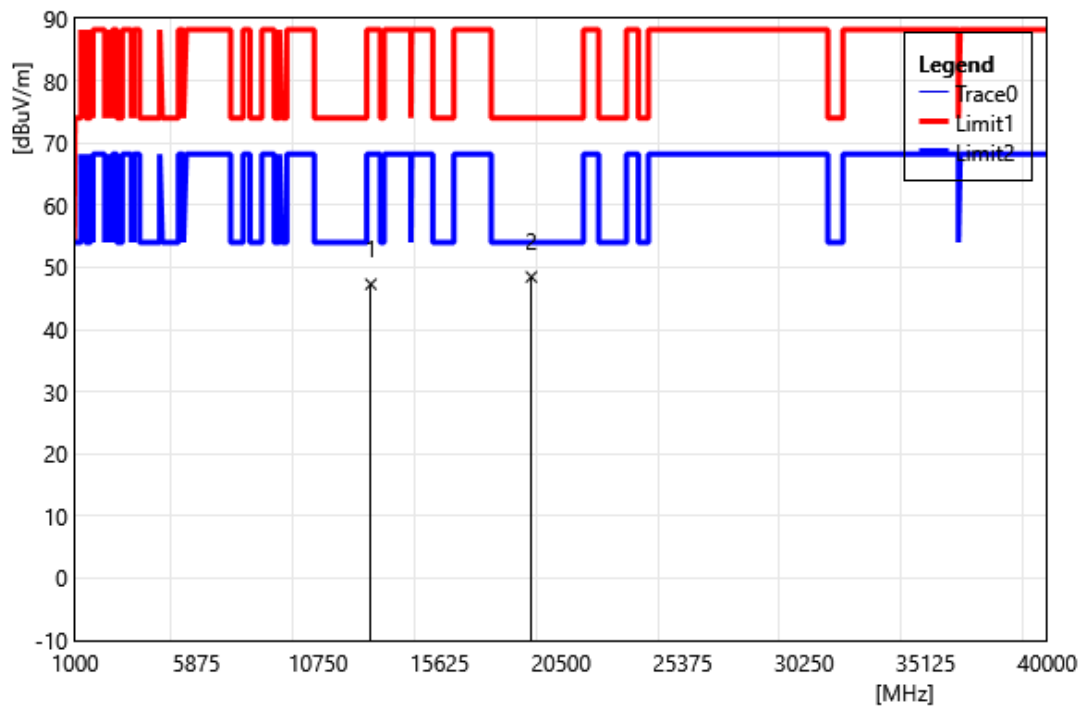


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12870.00	34.48	12.81	47.29	88.20	-40.91	PEAK
2	19305.00	32.32	16.15	48.47	74.00	-25.53	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 6435		
	MHz		
Polarization:	Horizontal		
Remark:			

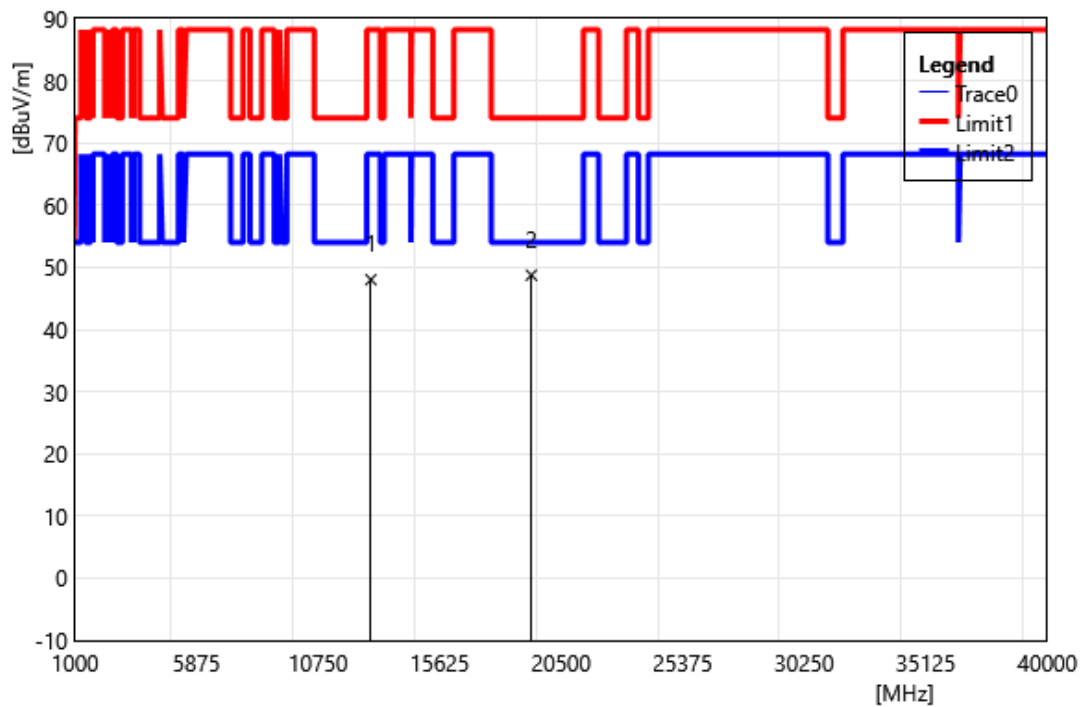


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12870.00	35.21	12.81	48.02	88.20	-40.18	PEAK
2	19305.00	32.59	16.15	48.74	74.00	-25.26	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 6475		
	MHz		
Polarization:	Vertical		
Remark:			

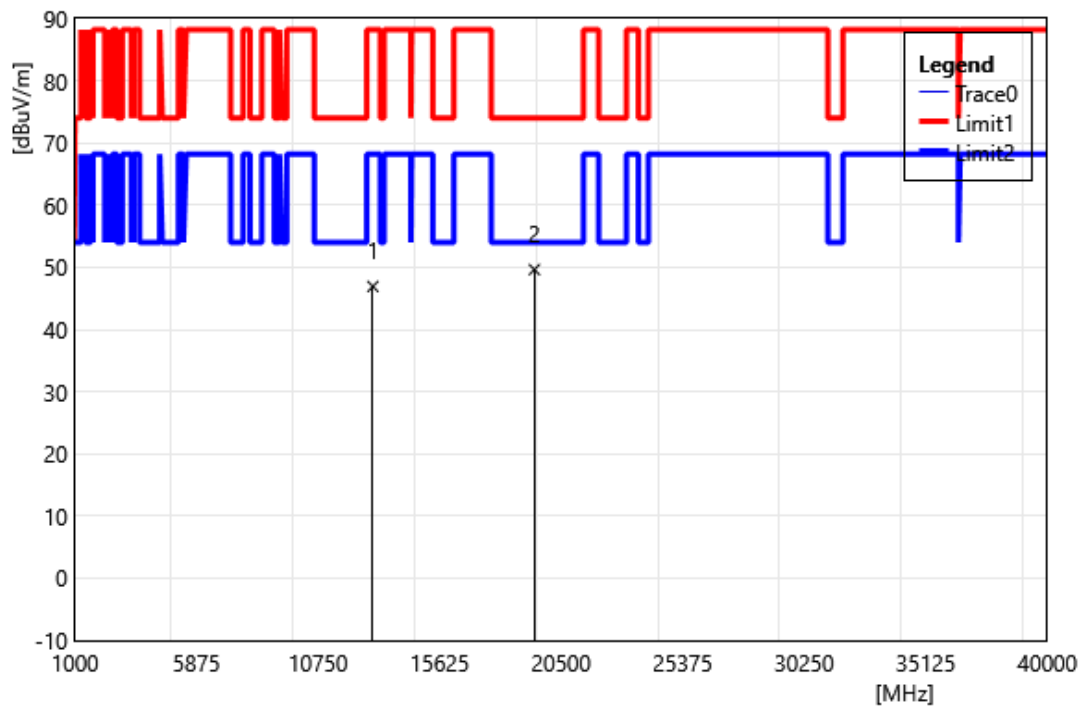


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12950.00	34.00	12.94	46.94	88.20	-41.26	PEAK
2	19425.00	33.26	16.38	49.64	74.00	-24.36	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 6475		
	MHz		
Polarization:	Horizontal		
Remark:			

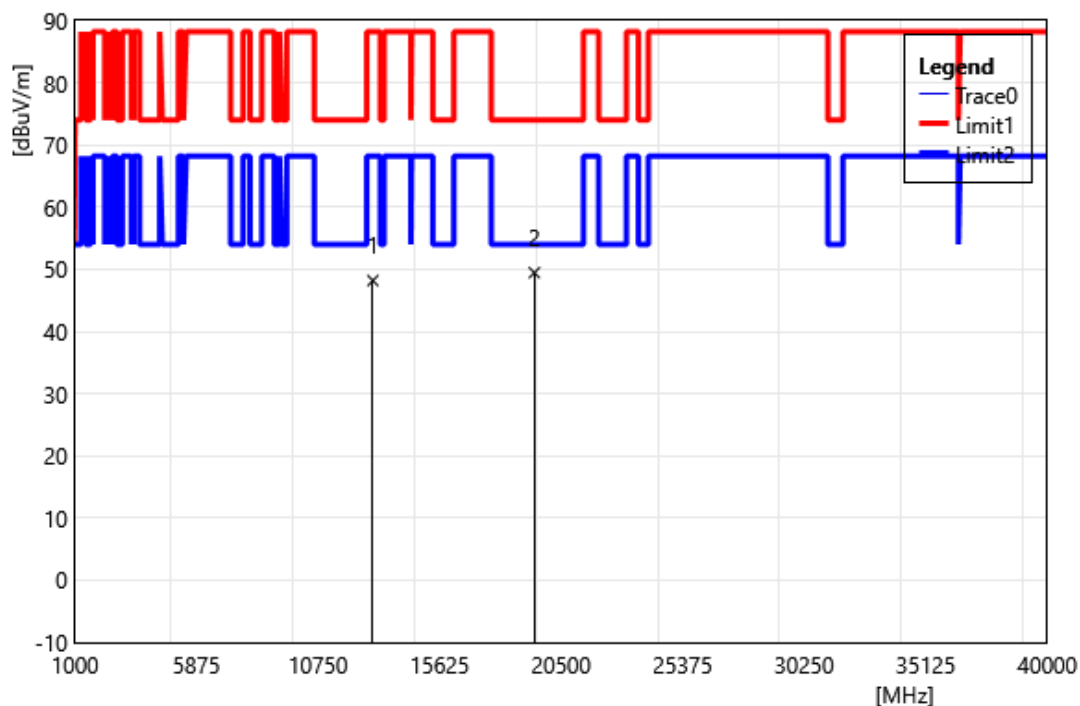


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12950.00	35.26	12.94	48.20	88.20	-40.00	PEAK
2	19425.00	33.09	16.38	49.47	74.00	-24.53	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 6515		
	MHz		
Polarization:	Vertical		
Remark:			

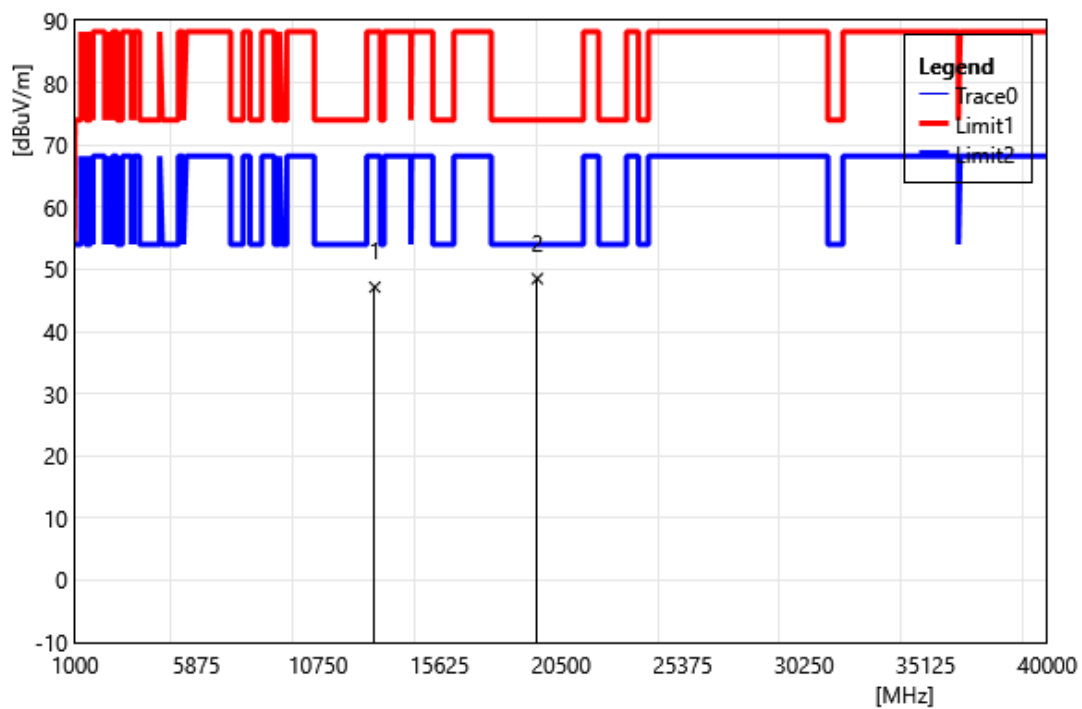


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13030.00	34.13	13.01	47.14	88.20	-41.06	PEAK
2	19545.00	32.65	15.84	48.49	74.00	-25.51	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 6515		
	MHz		
Polarization:	Horizontal		
Remark:			

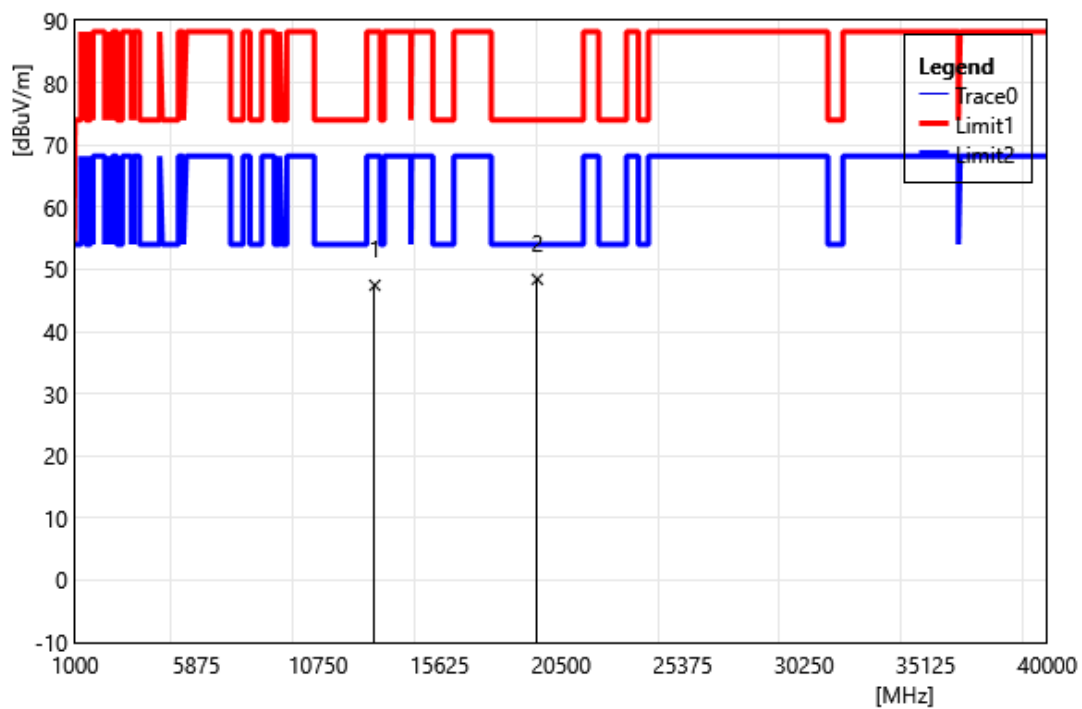


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13030.00	34.43	13.01	47.44	88.20	-40.76	PEAK
2	19545.00	32.57	15.84	48.41	74.00	-25.59	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 6535		
	MHz		
Polarization:	Vertical		
Remark:			

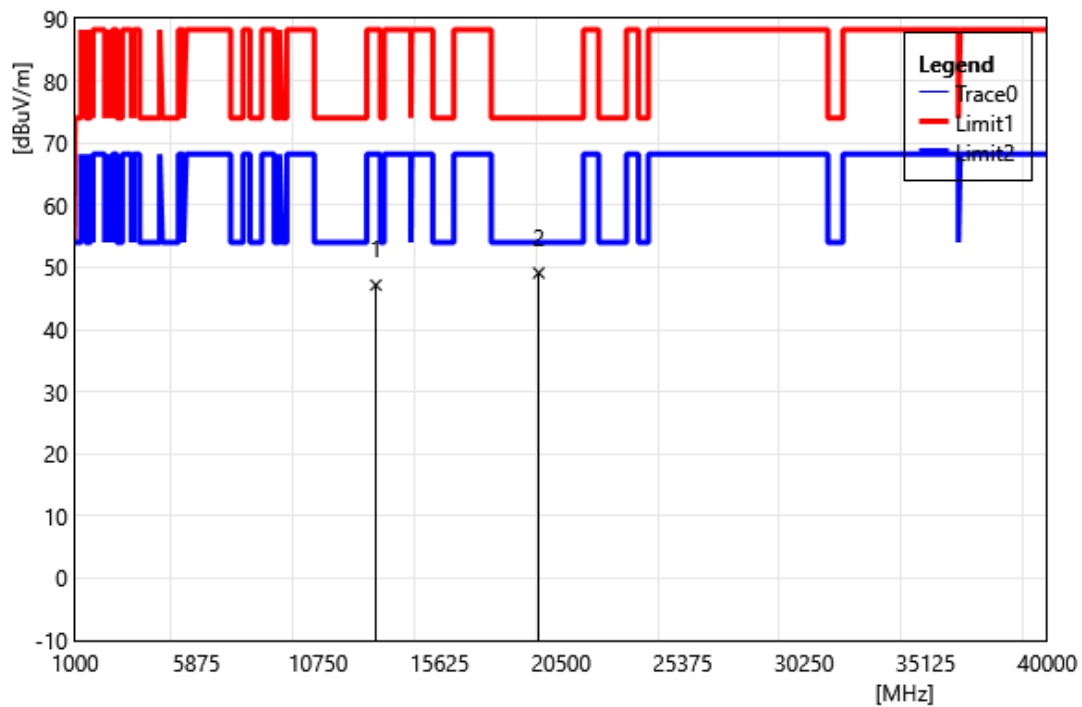


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13070.00	34.18	12.97	47.15	88.20	-41.05	PEAK
2	19605.00	33.17	15.93	49.10	74.00	-24.90	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 6535		
	MHz		
Polarization:	Horizontal		
Remark:			

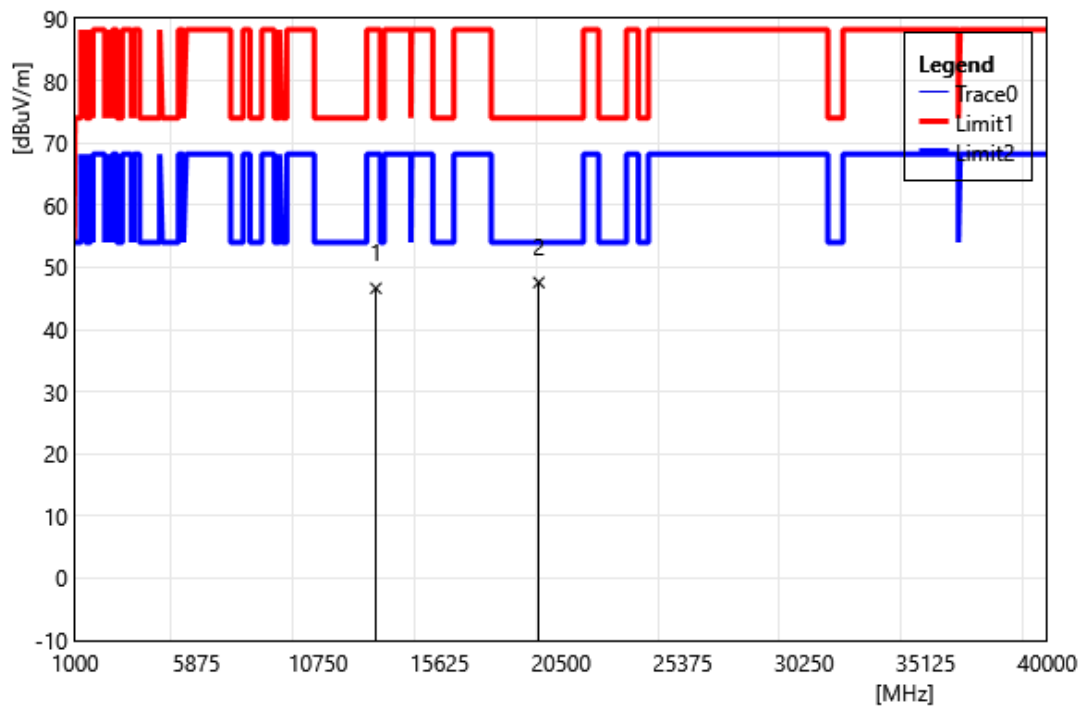


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13070.00	33.67	12.97	46.64	88.20	-41.56	PEAK
2	19605.00	31.64	15.93	47.57	74.00	-26.43	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 6695		
	MHz		
Polarization:	Vertical		
Remark:			

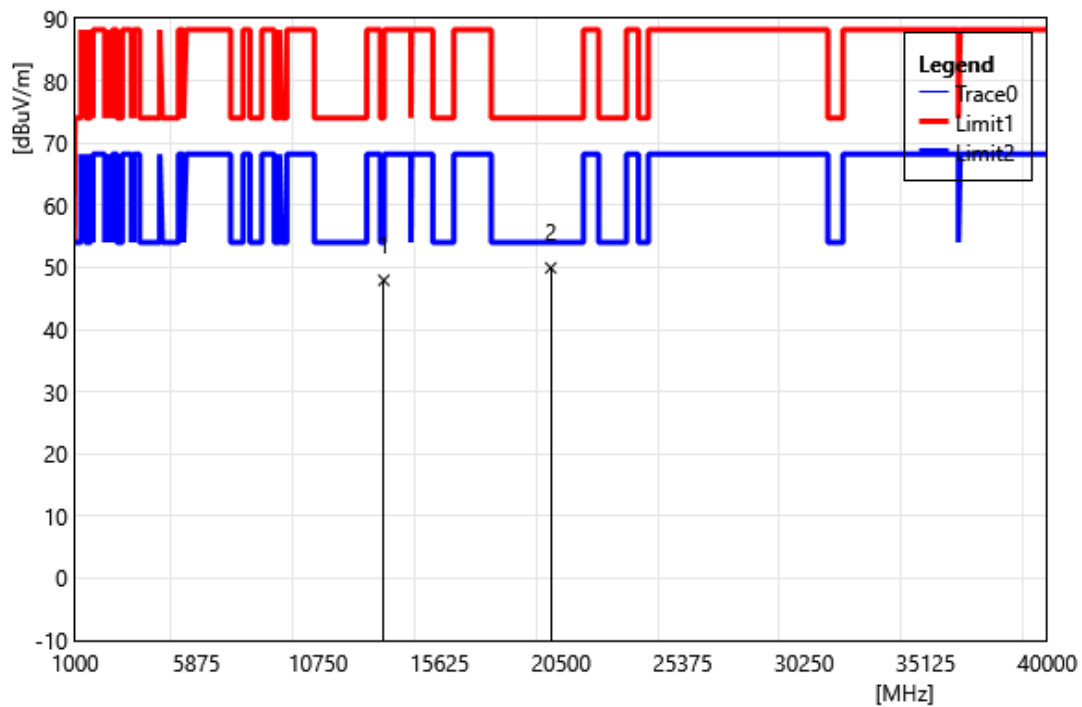


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13390.00	34.14	13.78	47.92	74.00	-26.08	PEAK
2	20085.00	33.69	16.22	49.91	74.00	-24.09	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 6695		
	MHz		
Polarization:	Horizontal		
Remark:			

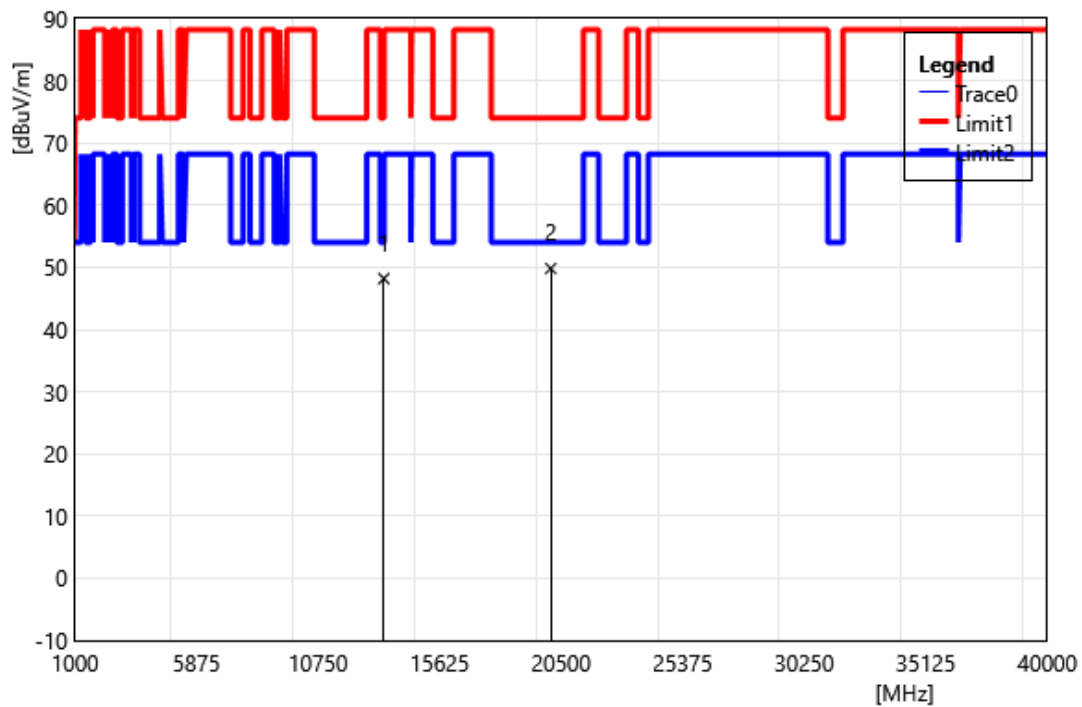


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13390.00	34.41	13.78	48.19	74.00	-25.81	PEAK
2	20085.00	33.60	16.22	49.82	74.00	-24.18	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 6855		
	MHz		
Polarization:	Vertical		
Remark:			

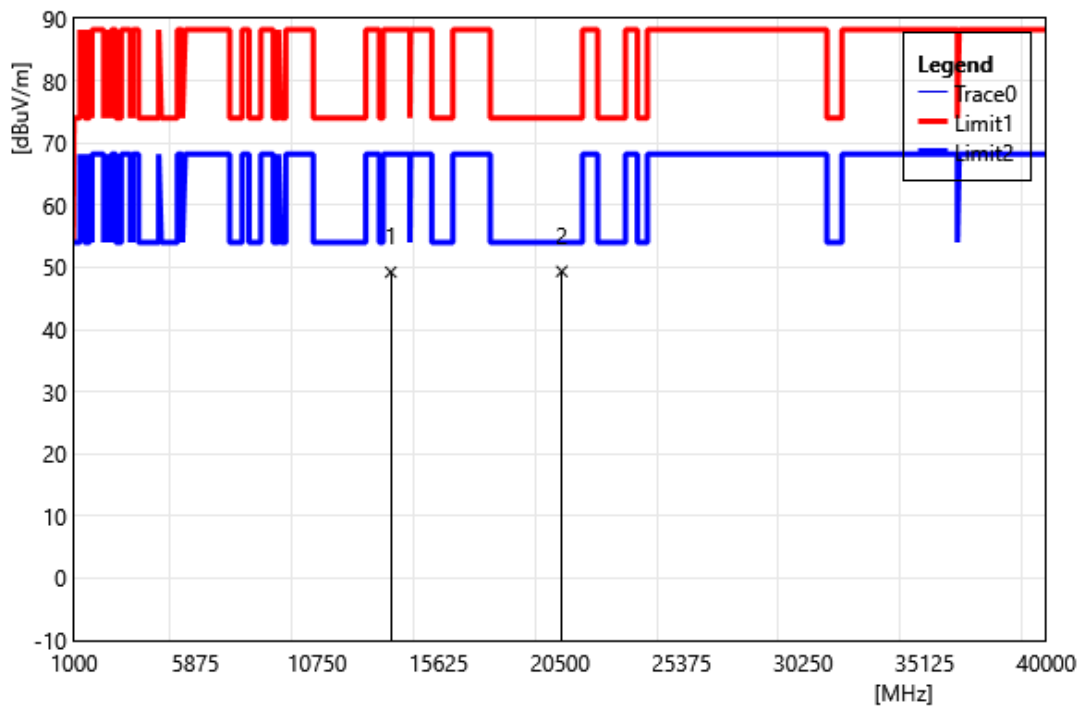


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13710.00	34.65	14.57	49.22	88.20	-38.98	PEAK
2	20565.00	32.75	16.59	49.34	74.00	-24.66	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 6855		
	MHz		
Polarization:	Horizontal		
Remark:			

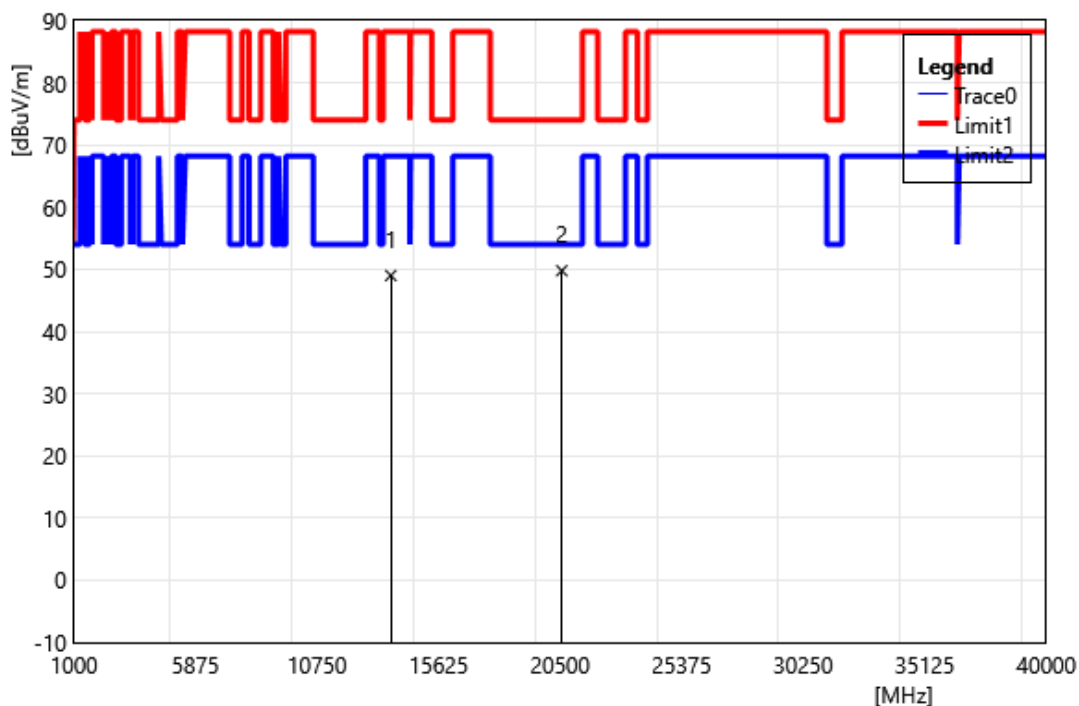


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13710.00	34.43	14.57	49.00	88.20	-39.20	PEAK
2	20565.00	33.20	16.59	49.79	74.00	-24.21	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 6875		
	MHz		
Polarization:	Vertical		
Remark:			

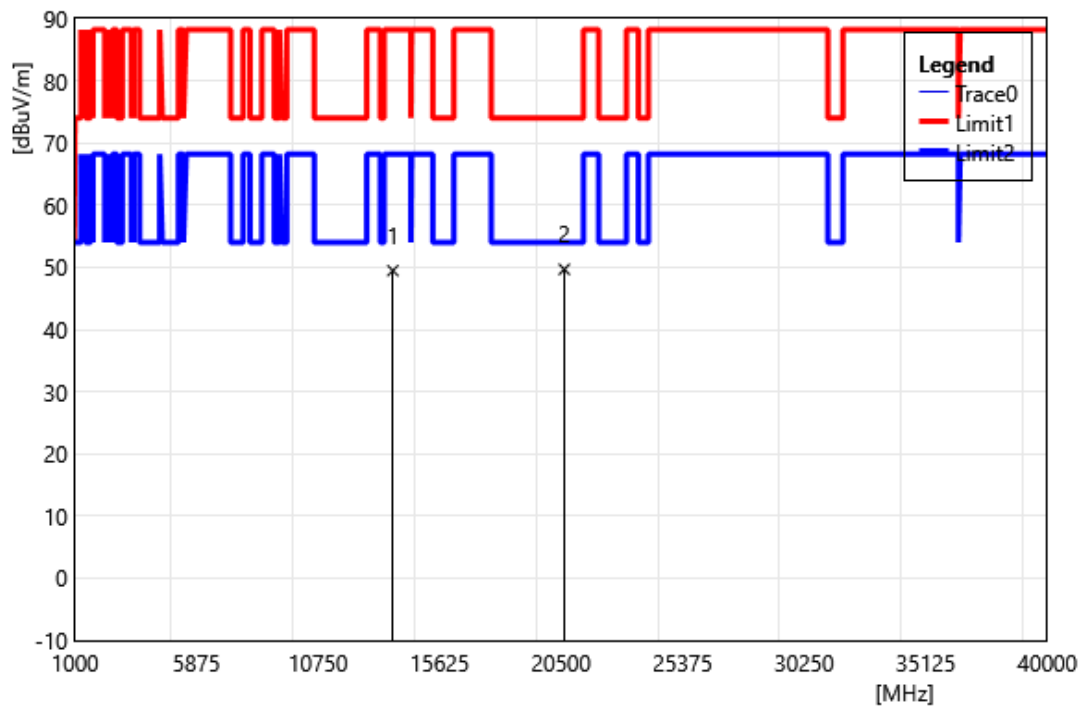


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13750.00	35.02	14.44	49.46	88.20	-38.74	PEAK
2	20625.00	33.02	16.66	49.68	74.00	-24.32	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 6875		
	MHz		
Polarization:	Horizontal		
Remark:			

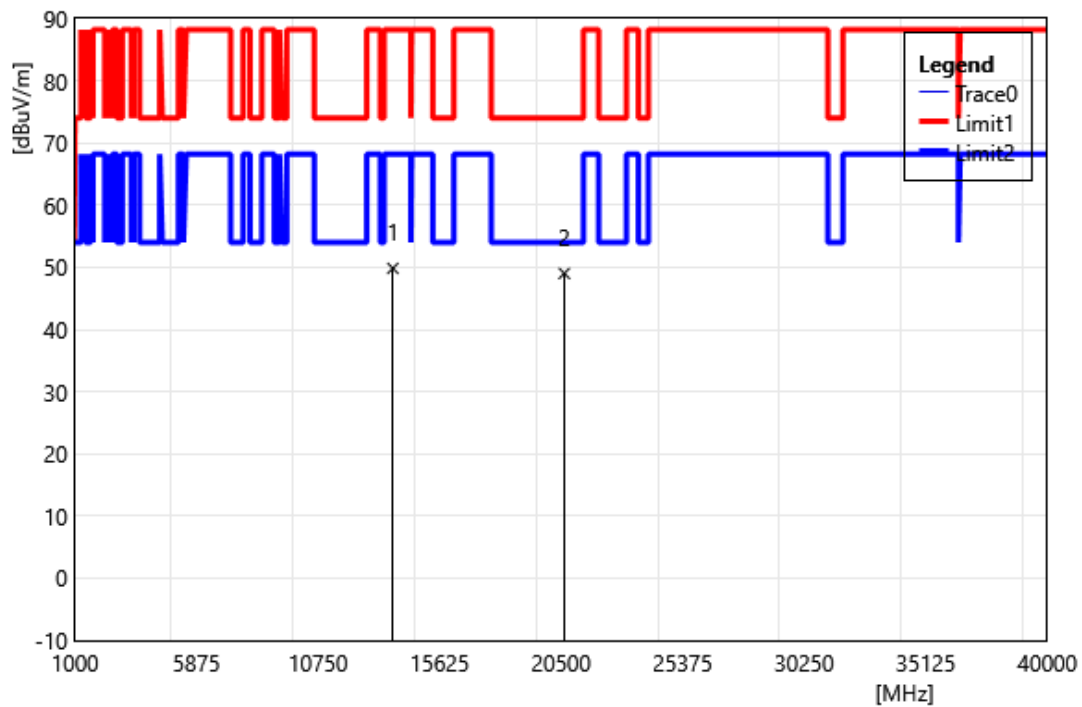


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13750.00	35.39	14.44	49.83	88.20	-38.37	PEAK
2	20625.00	32.36	16.66	49.02	74.00	-24.99	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 6895		
	MHz		
Polarization:	Vertical		
Remark:			

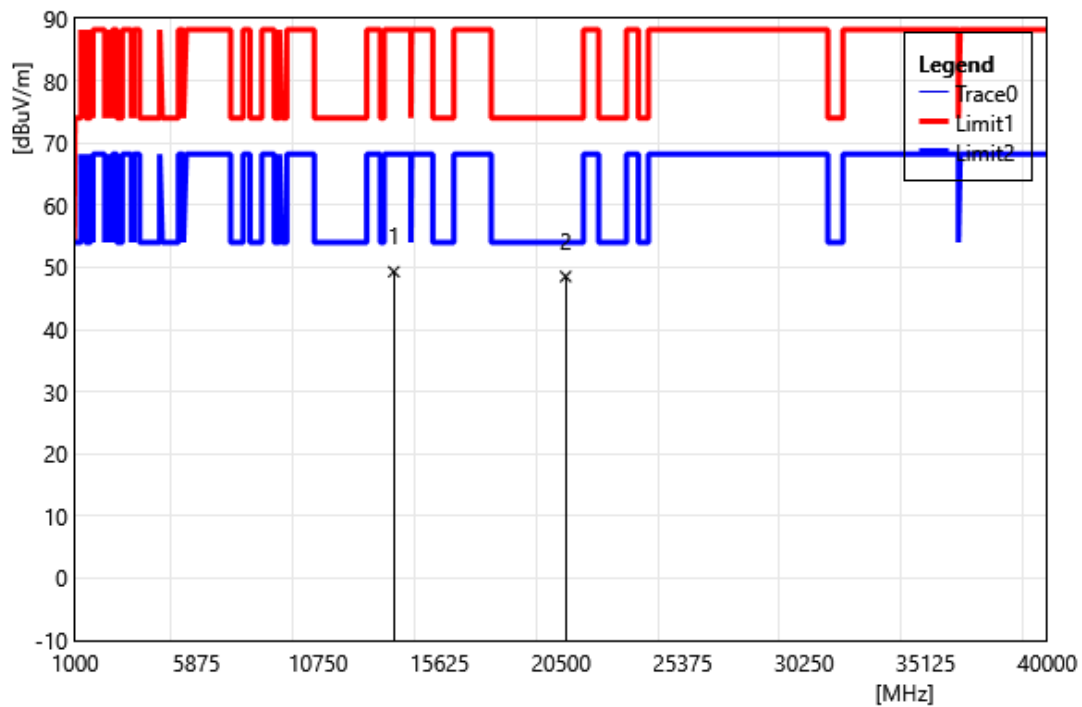


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13790.00	34.98	14.31	49.29	88.20	-38.91	PEAK
2	20685.00	31.79	16.74	48.53	74.00	-25.47	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 6895		
	MHz		
Polarization:	Horizontal		
Remark:			

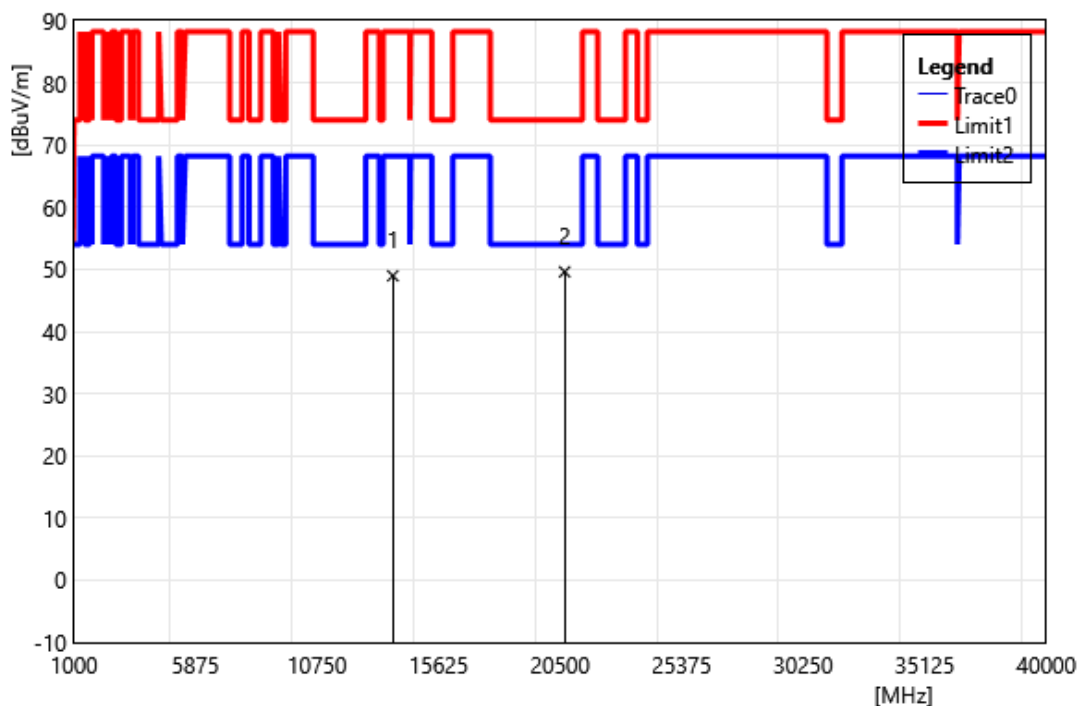


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13790.00	34.66	14.31	48.97	88.20	-39.23	PEAK
2	20685.00	32.87	16.74	49.61	74.00	-24.39	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 6995		
	MHz		
Polarization:	Vertical		
Remark:			

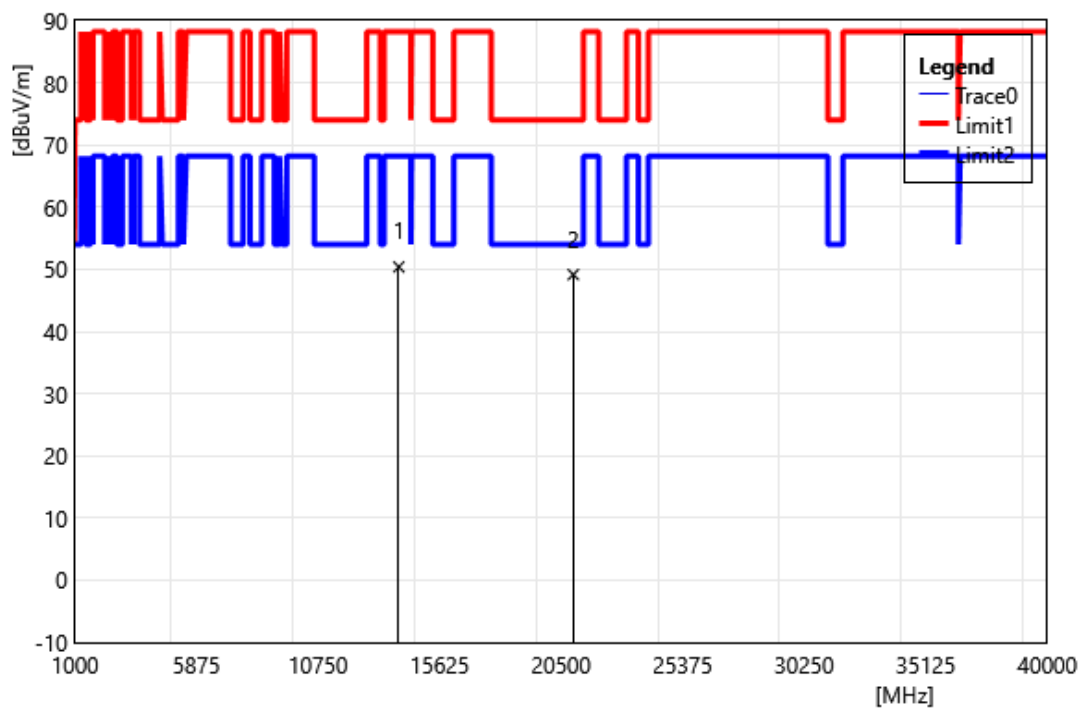


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13990.00	35.54	14.85	50.39	88.20	-37.81	PEAK
2	20985.00	32.04	17.12	49.16	74.00	-24.84	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 6995		
	MHz		
Polarization:	Horizontal		
Remark:			

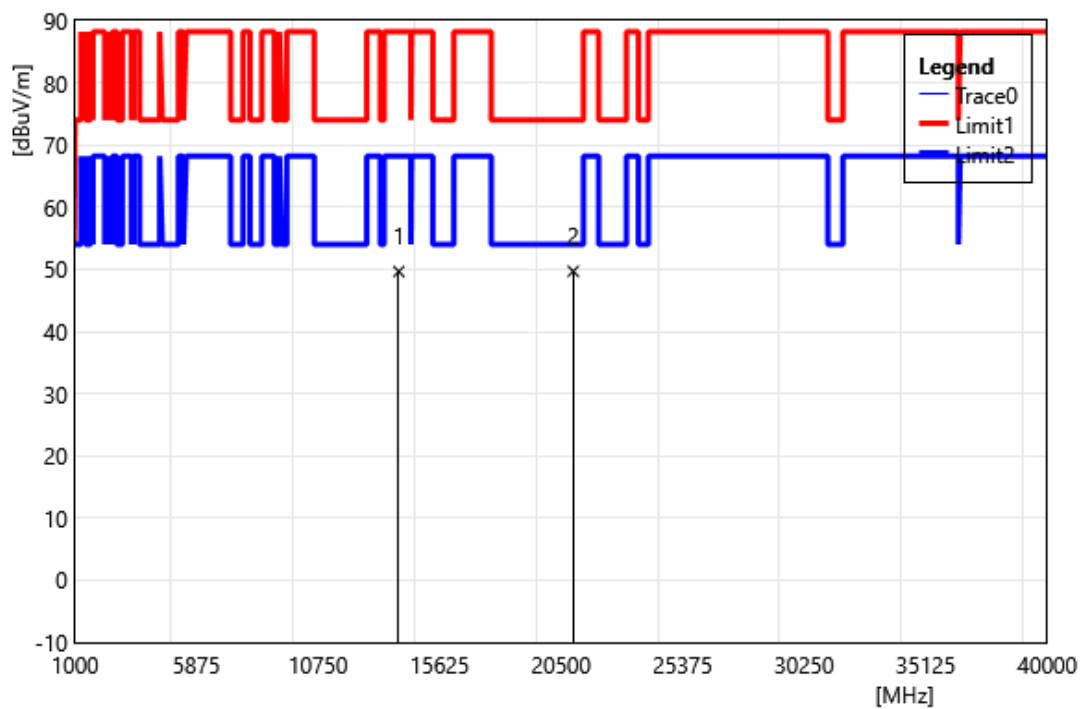


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13990.00	34.80	14.85	49.65	88.20	-38.55	PEAK
2	20985.00	32.56	17.12	49.68	74.00	-24.32	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 7095		
	MHz		
Polarization:	Vertical		
Remark:			

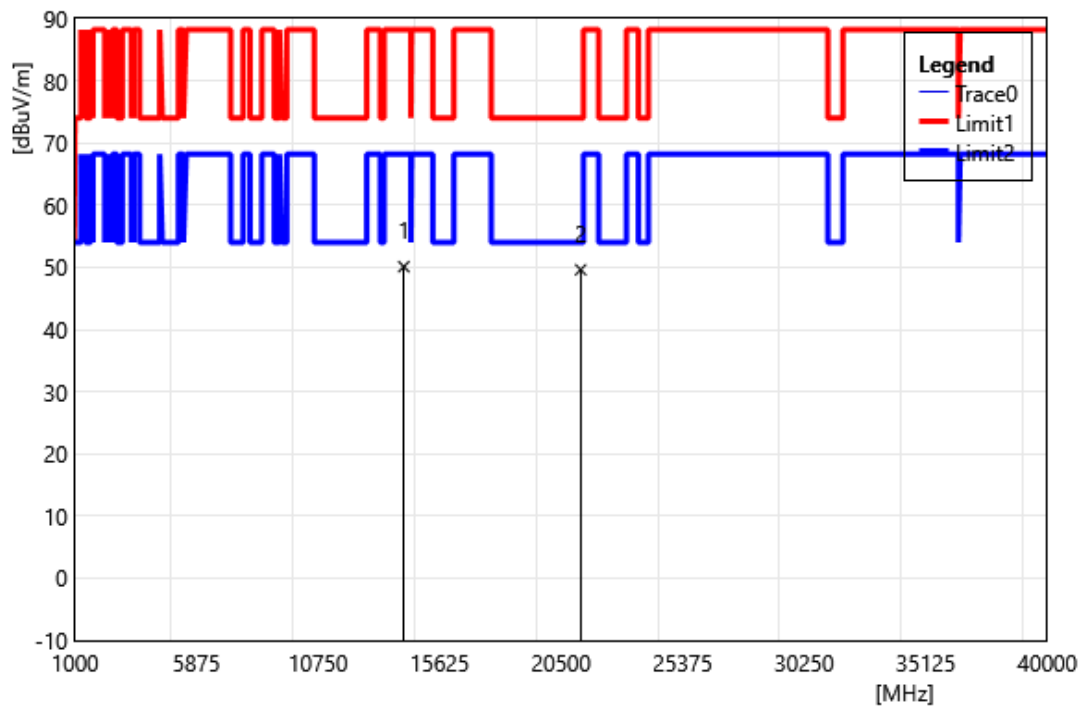


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14190.00	34.62	15.49	50.11	88.20	-38.09	PEAK
2	21285.00	33.22	16.39	49.61	74.00	-24.39	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 7095		
	MHz		
Polarization:	Horizontal		
Remark:			

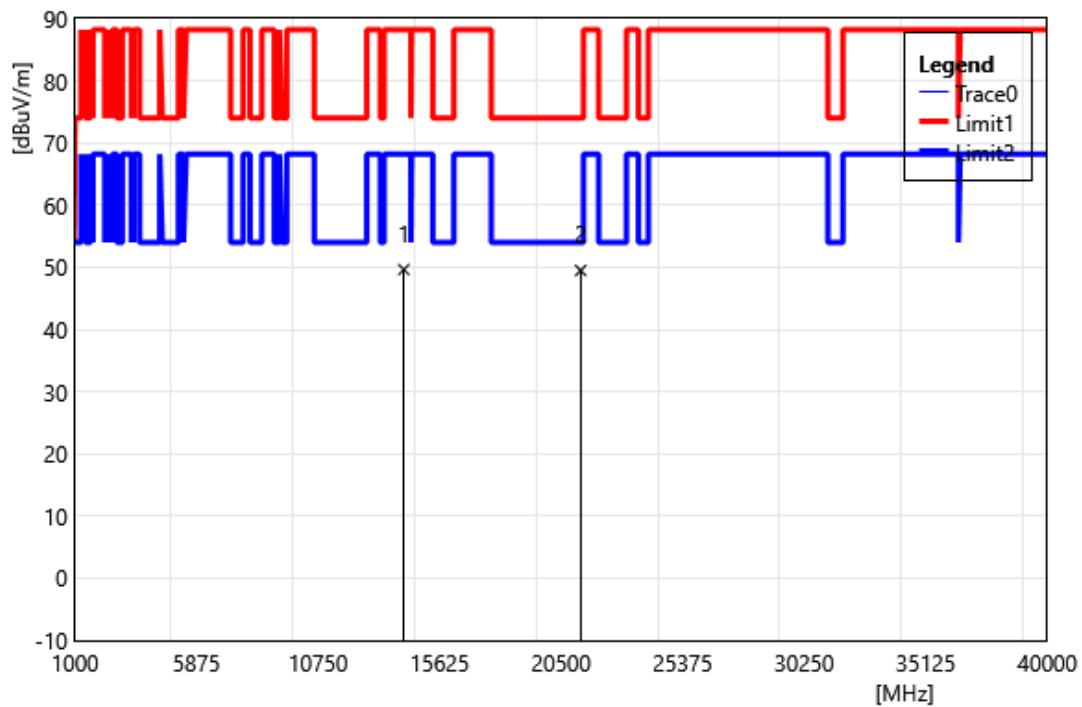


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14190.00	34.16	15.49	49.65	88.20	-38.55	PEAK
2	21285.00	33.10	16.39	49.49	74.00	-24.51	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 7115		
	MHz		
Polarization:	Vertical		
Remark:			

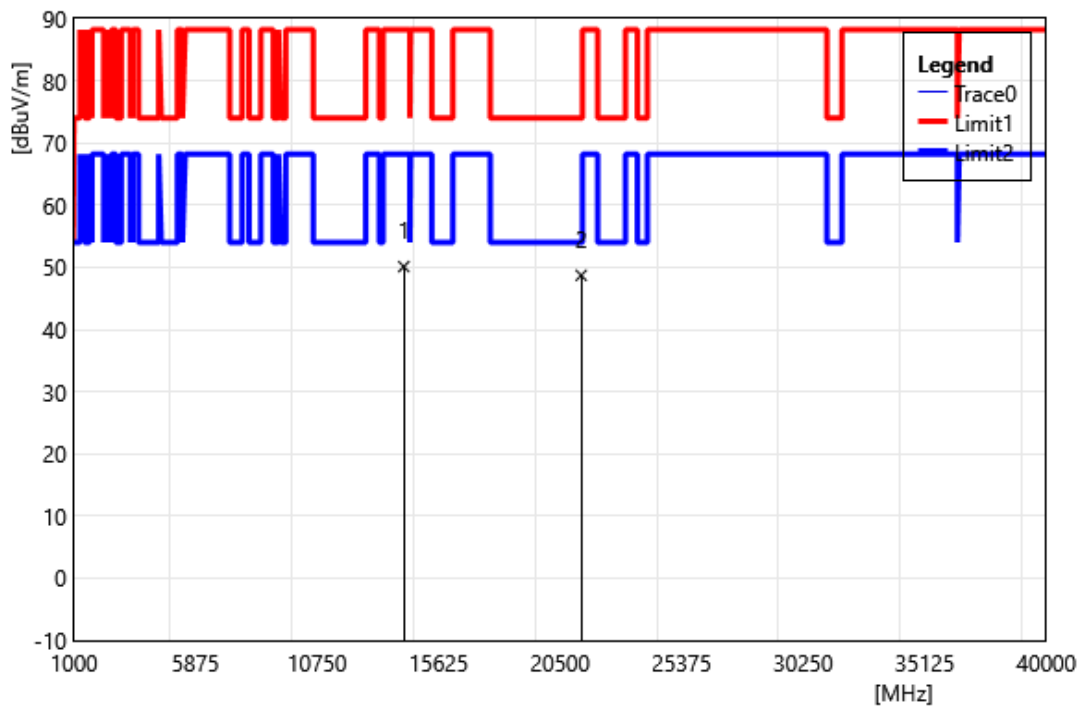


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14230.00	34.53	15.58	50.11	88.20	-38.09	PEAK
2	21345.00	32.28	16.44	48.72	74.00	-25.28	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 7115		
	MHz		
Polarization:	Horizontal		
Remark:			

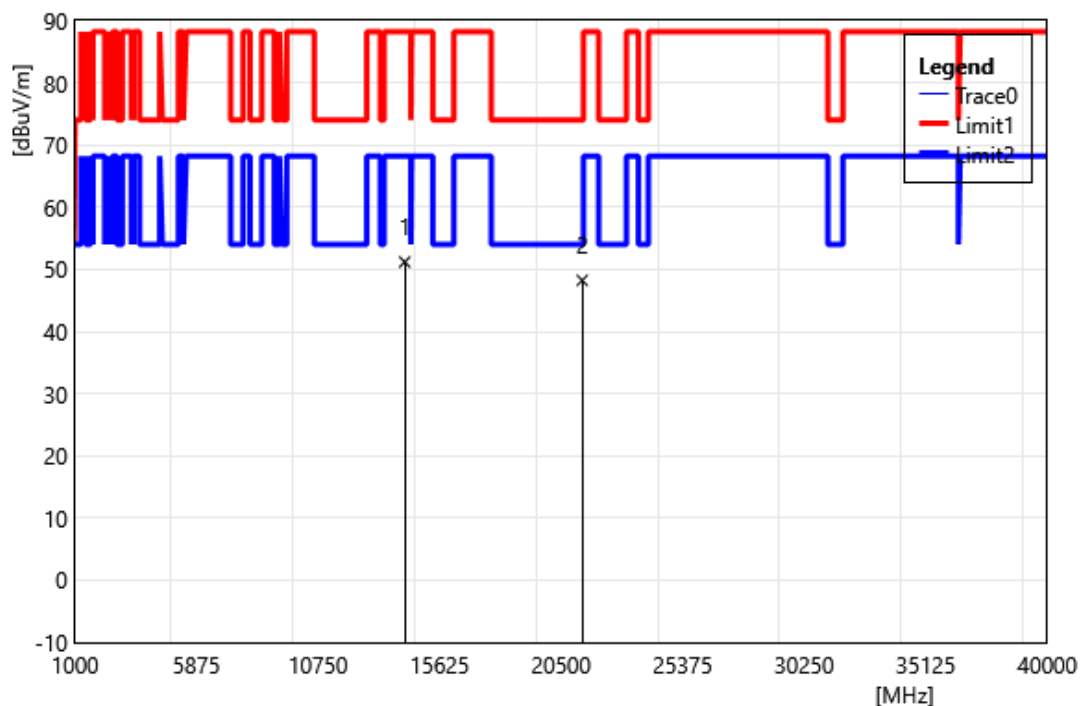


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14230.00	35.61	15.58	51.19	88.20	-37.01	PEAK
2	21345.00	31.79	16.44	48.23	74.00	-25.77	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5965		
	MHz		
Polarization:	Vertical		
Remark:			

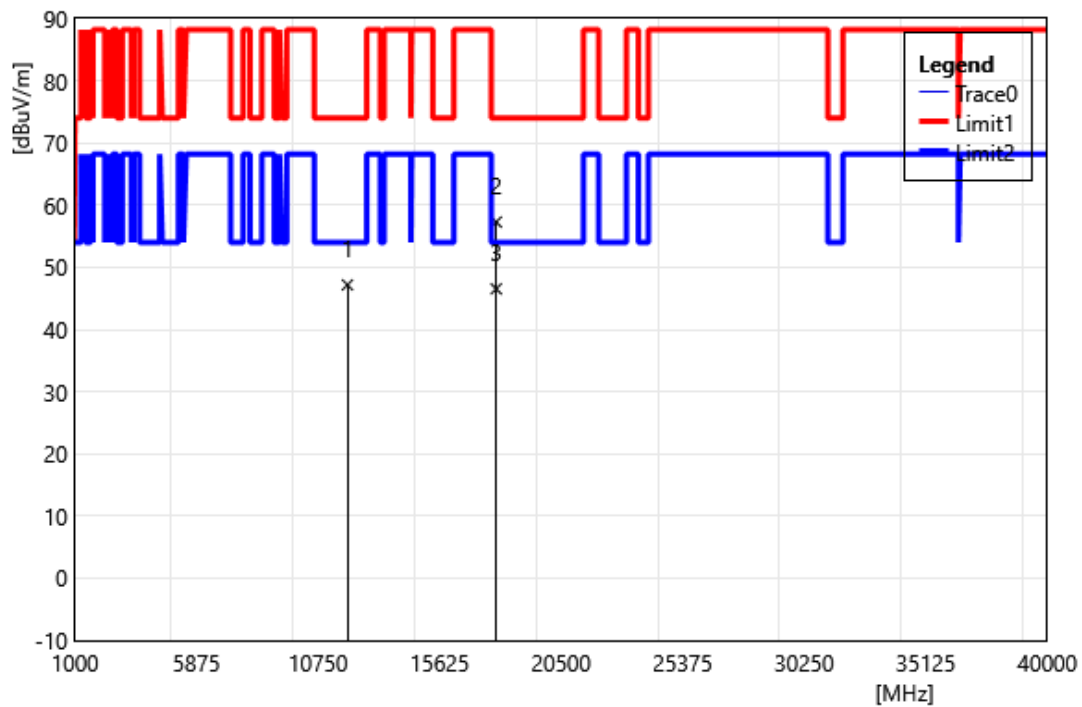


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11930.00	35.48	11.70	47.18	74.00	-26.82	PEAK
2	17895.00	32.69	24.60	57.29	74.00	-16.71	PEAK
3	17895.00	21.95	24.60	46.55	54.00	-7.45	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 5965		
	MHz		
Polarization:	Horizontal		
Remark:			

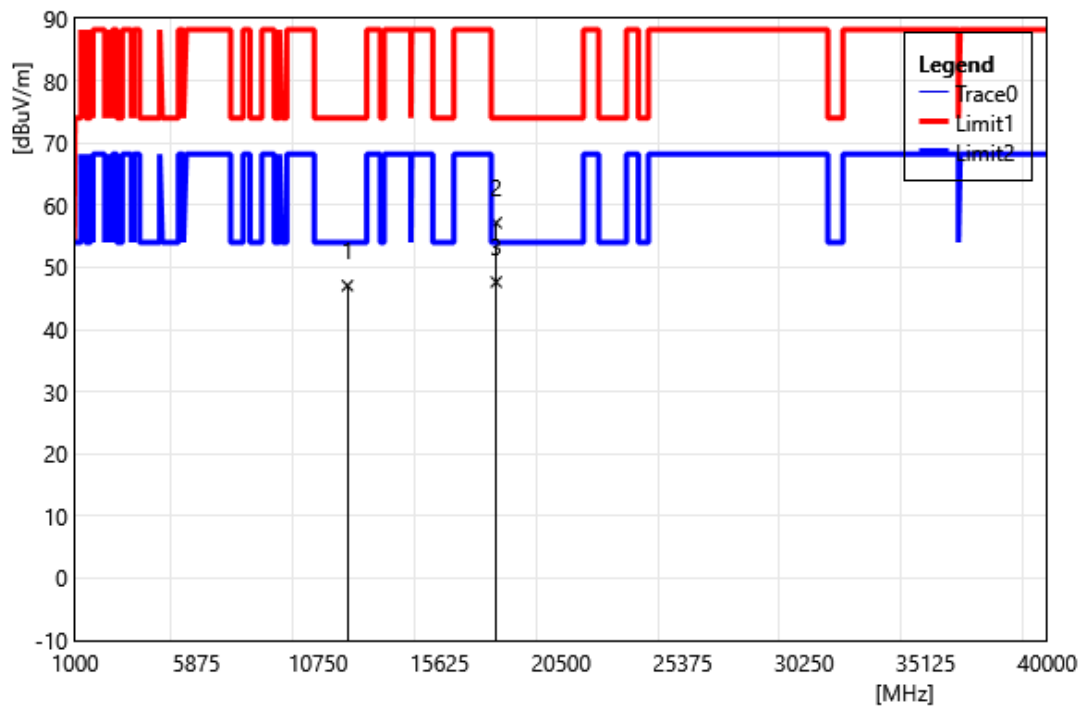


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11930.00	35.36	11.70	47.06	74.00	-26.94	PEAK
2	17895.00	32.57	24.60	57.17	74.00	-16.83	PEAK
3	17895.00	23.04	24.60	47.64	54.00	-6.36	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 6165		
	MHz		
Polarization:	Vertical		
Remark:			

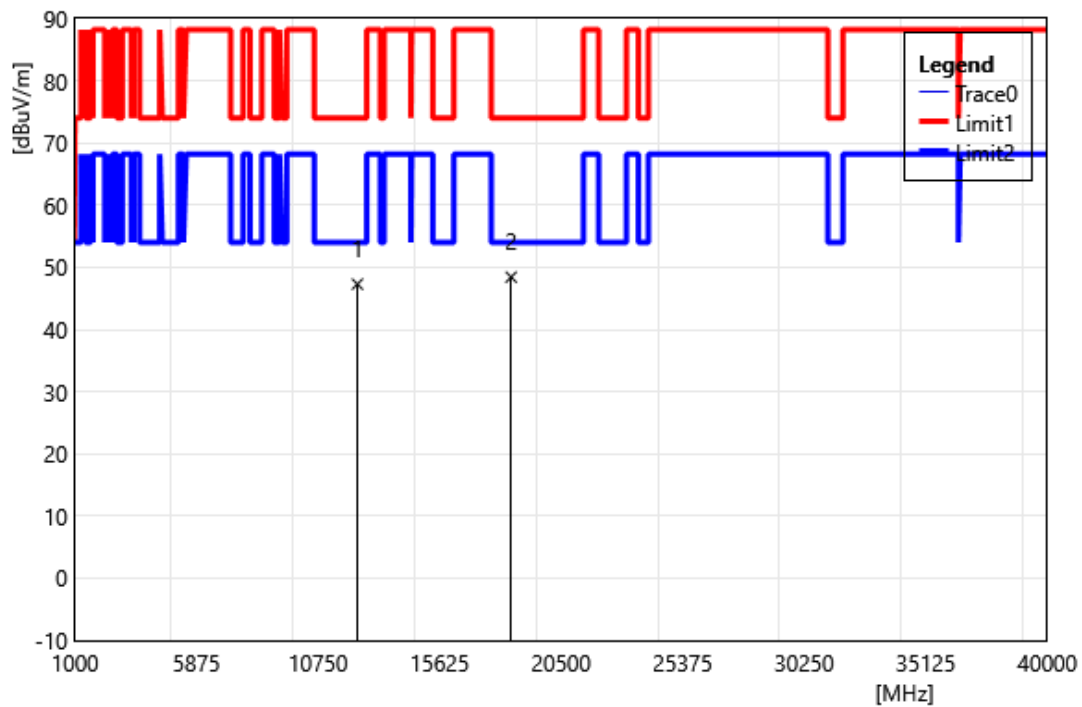


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12330.00	35.54	11.76	47.30	74.00	-26.70	PEAK
2	18495.00	33.00	15.42	48.42	74.00	-25.58	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 6165		
	MHz		
Polarization:	Horizontal		
Remark:			

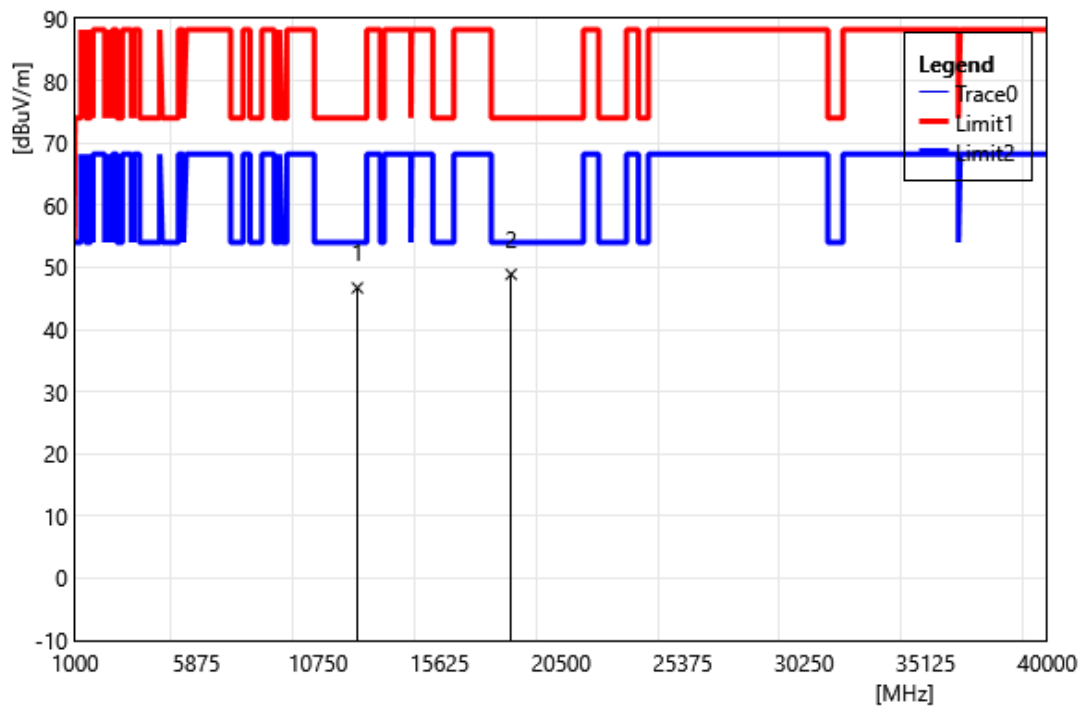


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12330.00	34.94	11.76	46.70	74.00	-27.30	PEAK
2	18495.00	33.45	15.42	48.87	74.00	-25.13	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 6405		
	MHz		
Polarization:	Vertical		
Remark:			

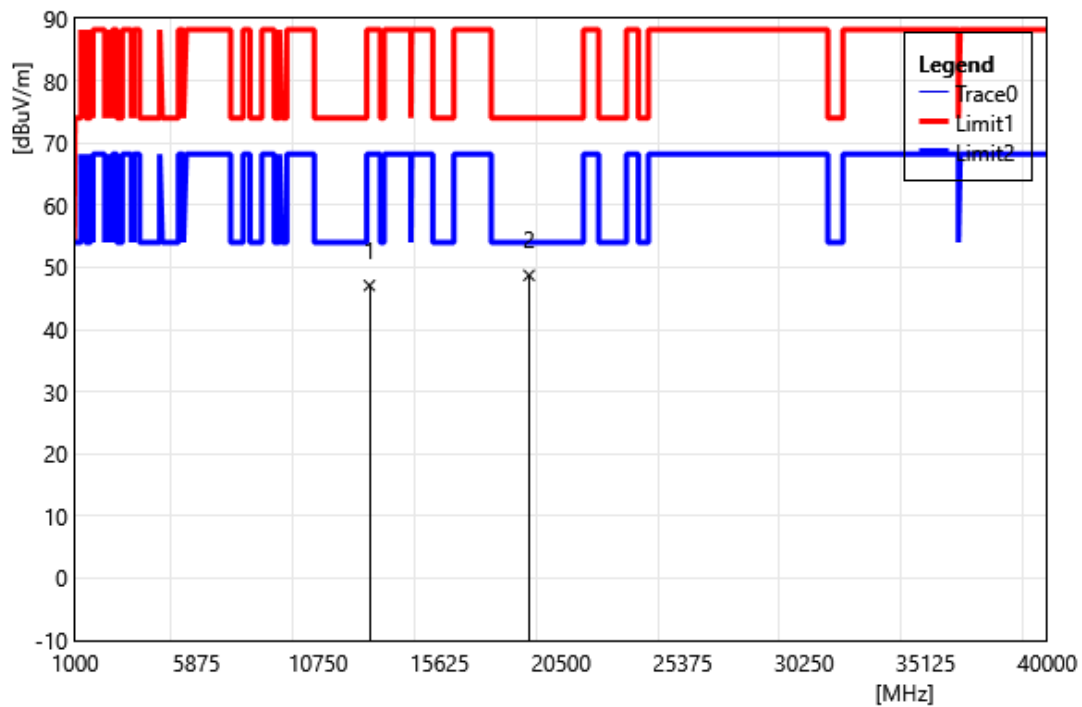


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12810.00	34.33	12.75	47.08	88.20	-41.12	PEAK
2	19215.00	32.74	15.98	48.72	74.00	-25.28	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 6405		
	MHz		
Polarization:	Horizontal		
Remark:			

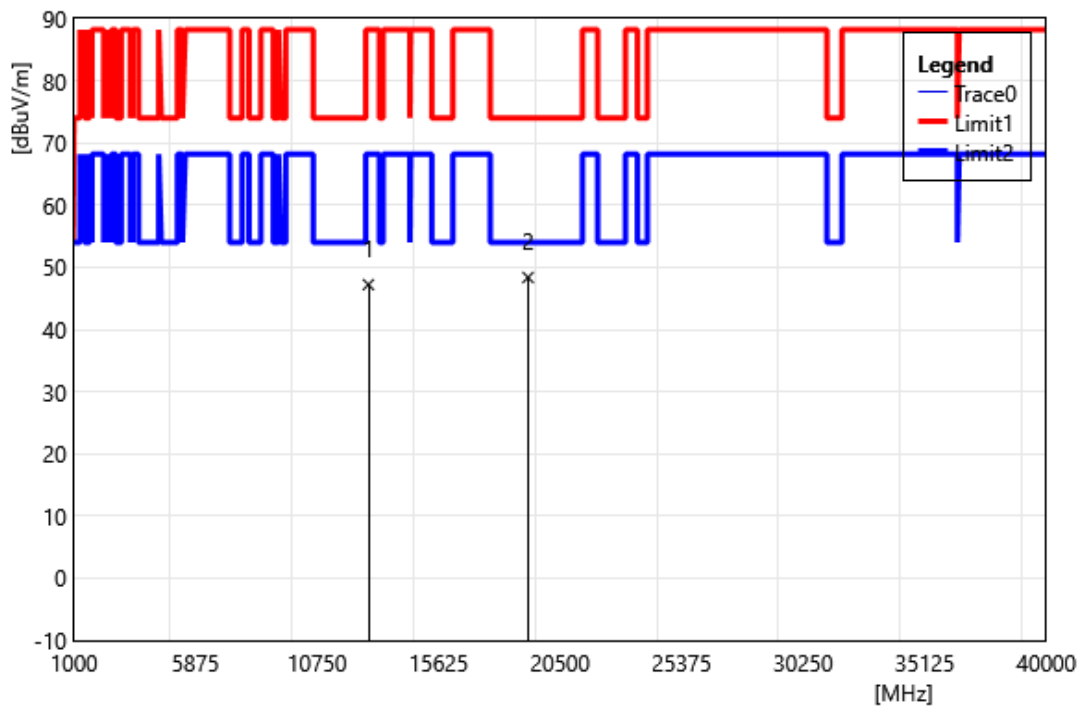


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12810.00	34.47	12.75	47.22	88.20	-40.98	PEAK
2	19215.00	32.38	15.98	48.36	74.00	-25.64	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 6445		
	MHz		
Polarization:	Vertical		
Remark:			

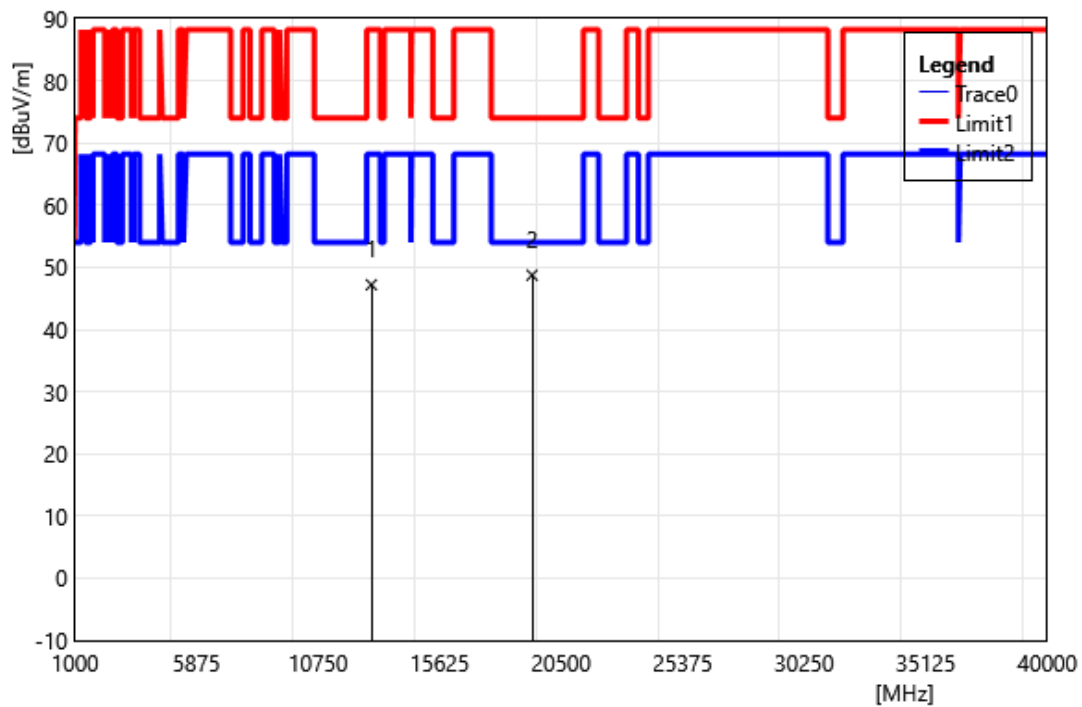


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12890.00	34.37	12.83	47.20	88.20	-41.00	PEAK
2	19335.00	32.53	16.21	48.74	74.00	-25.26	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 6445		
	MHz		
Polarization:	Horizontal		
Remark:			

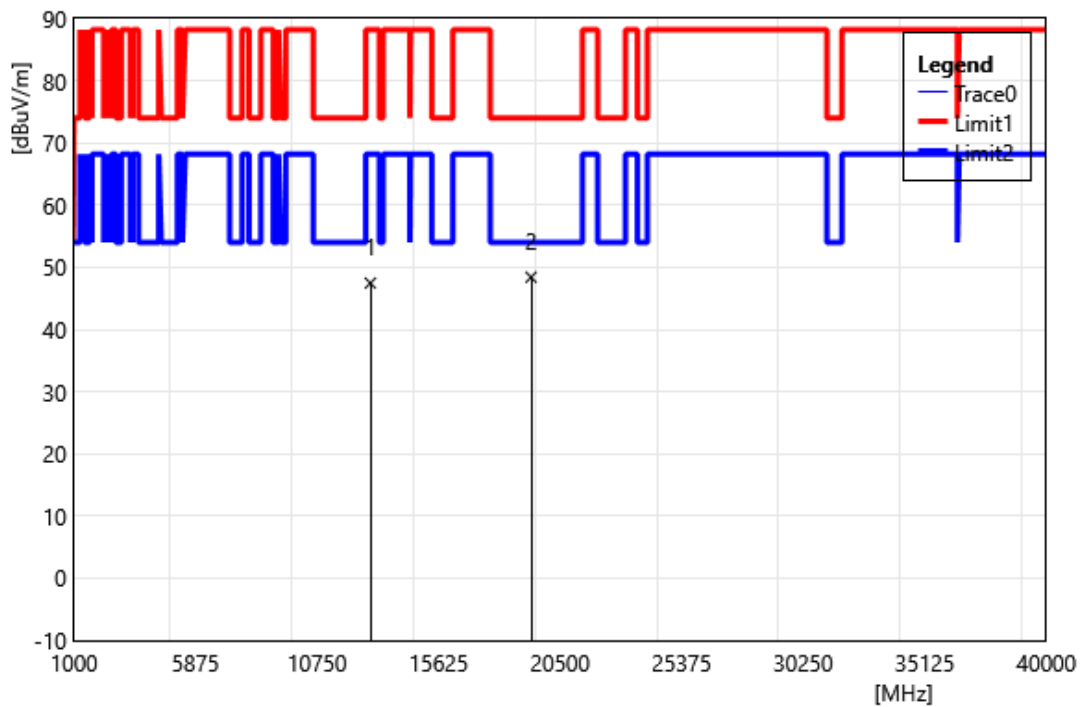


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12890.00	34.65	12.83	47.48	88.20	-40.72	PEAK
2	19335.00	32.22	16.21	48.43	74.00	-25.57	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 6485		
	MHz		
Polarization:	Vertical		
Remark:			

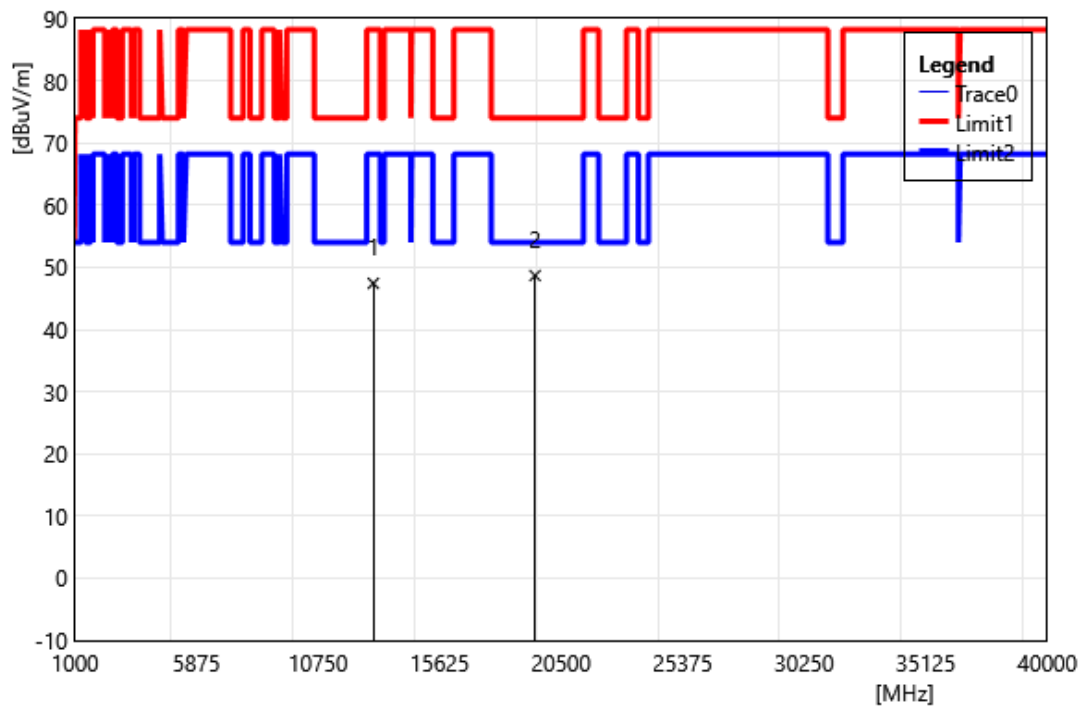


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12970.00	34.45	12.98	47.43	88.20	-40.77	PEAK
2	19455.00	32.24	16.44	48.68	74.00	-25.32	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 6485		
	MHz		
Polarization:	Horizontal		
Remark:			

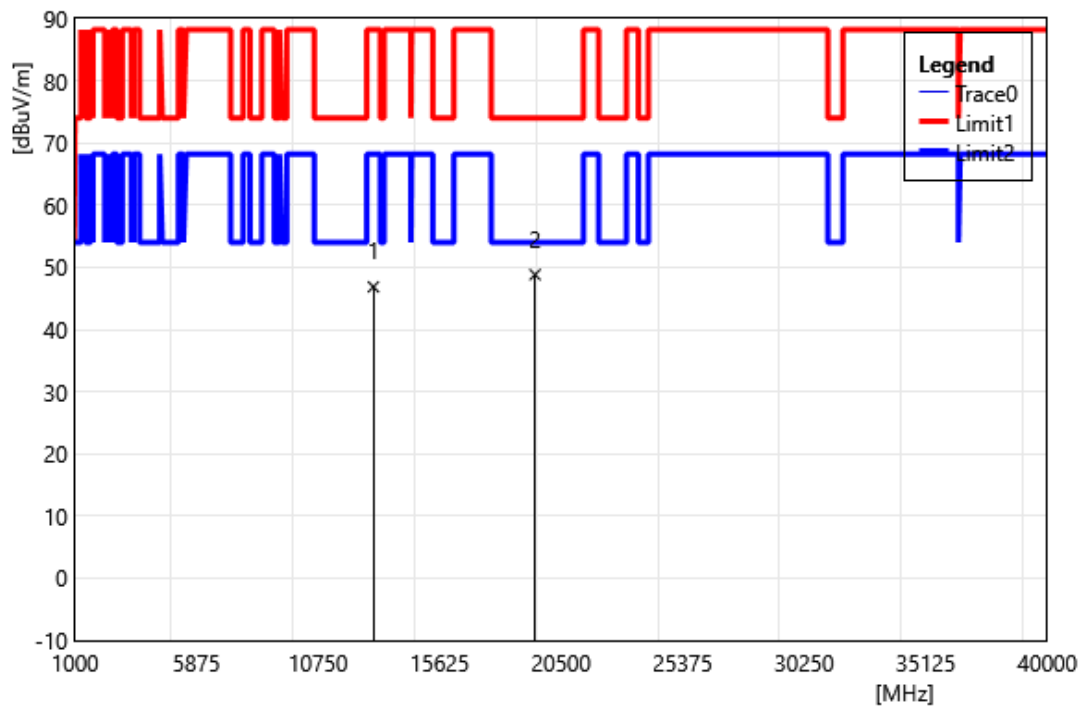


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12970.00	33.88	12.98	46.86	88.20	-41.34	PEAK
2	19455.00	32.39	16.44	48.83	74.00	-25.17	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 6525		
	MHz		
Polarization:	Vertical		
Remark:			

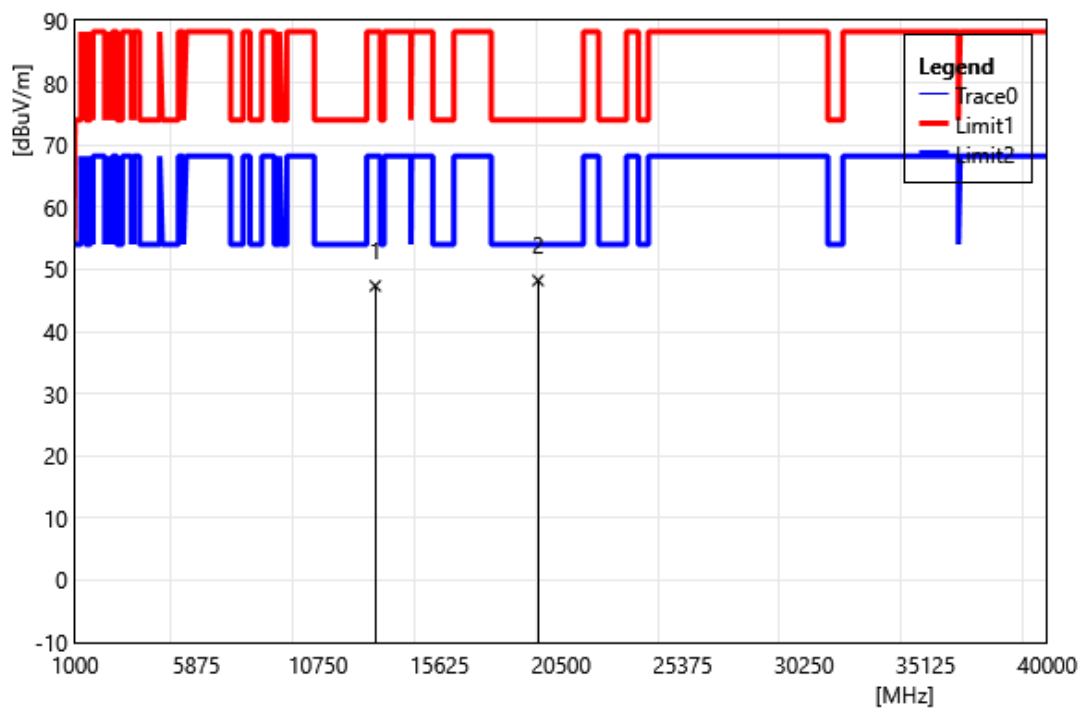


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13050.00	34.35	12.99	47.34	88.20	-40.86	PEAK
2	19575.00	32.32	15.89	48.21	74.00	-25.79	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 6525		
	MHz		
Polarization:	Horizontal		
Remark:			

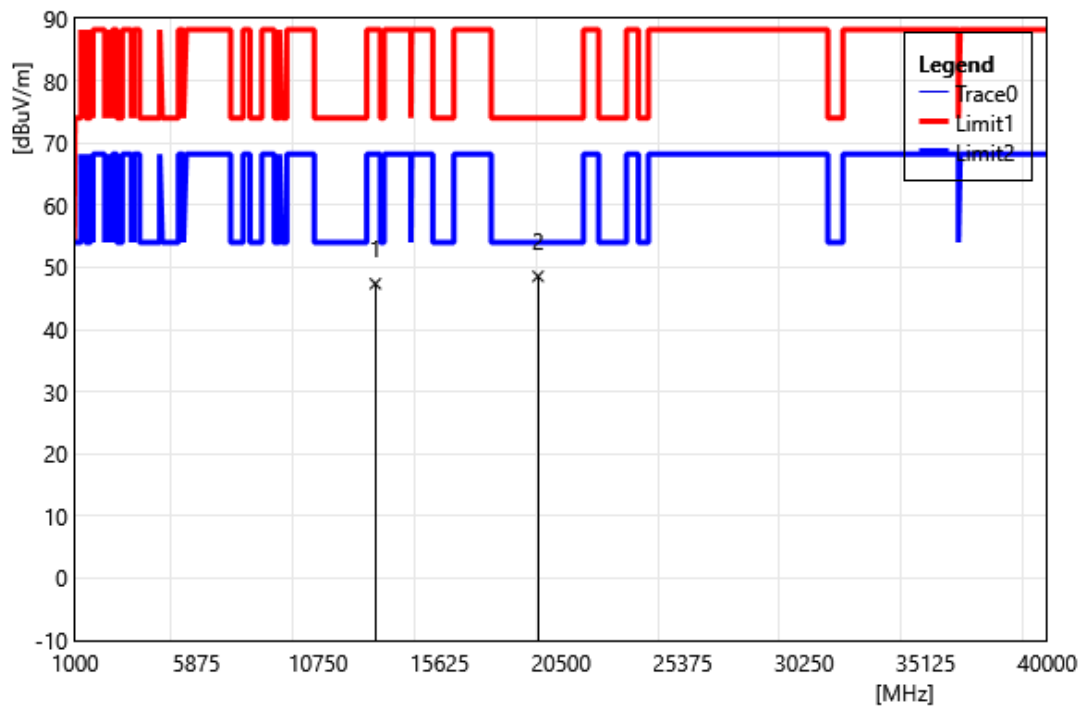


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13050.00	34.37	12.99	47.36	88.20	-40.84	PEAK
2	19575.00	32.66	15.89	48.55	74.00	-25.45	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 6565		
	MHz		
Polarization:	Vertical		
Remark:			

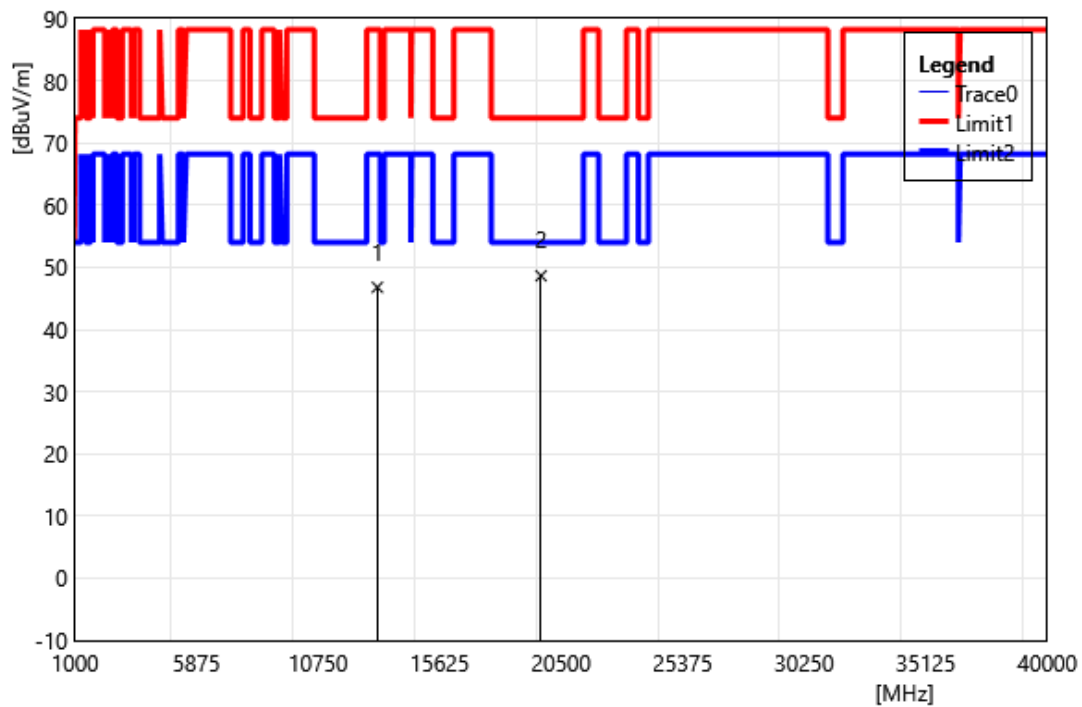


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13130.00	33.79	13.00	46.79	88.20	-41.41	PEAK
2	19695.00	32.58	16.07	48.65	74.00	-25.35	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 6565		
	MHz		
Polarization:	Horizontal		
Remark:			

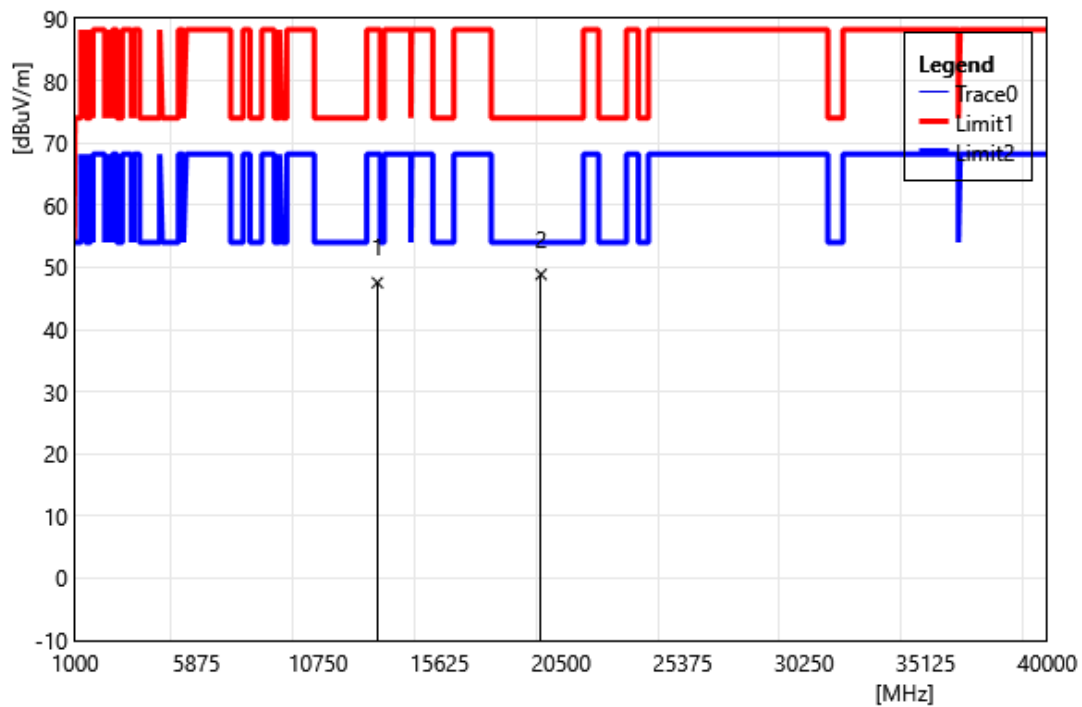


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13130.00	34.53	13.00	47.53	88.20	-40.67	PEAK
2	19695.00	32.79	16.07	48.86	74.00	-25.14	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 6685		
	MHz		
Polarization:	Vertical		
Remark:			

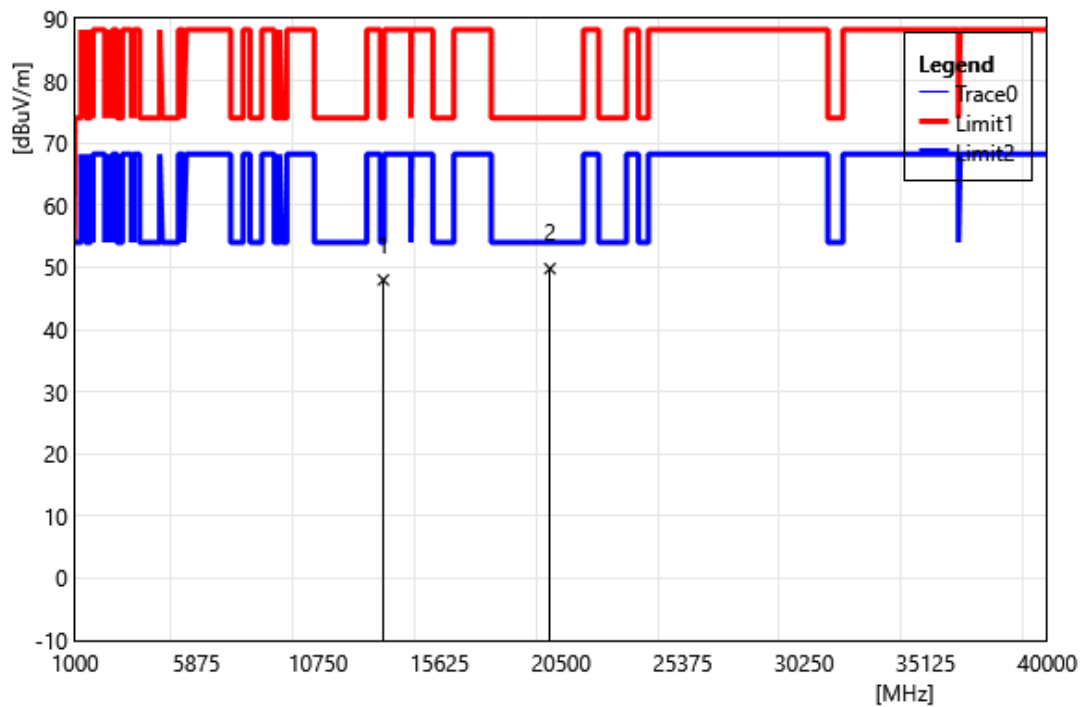


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13370.00	34.29	13.68	47.97	74.00	-26.03	PEAK
2	20055.00	33.61	16.18	49.79	74.00	-24.21	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 6685		
	MHz		
Polarization:	Horizontal		
Remark:			

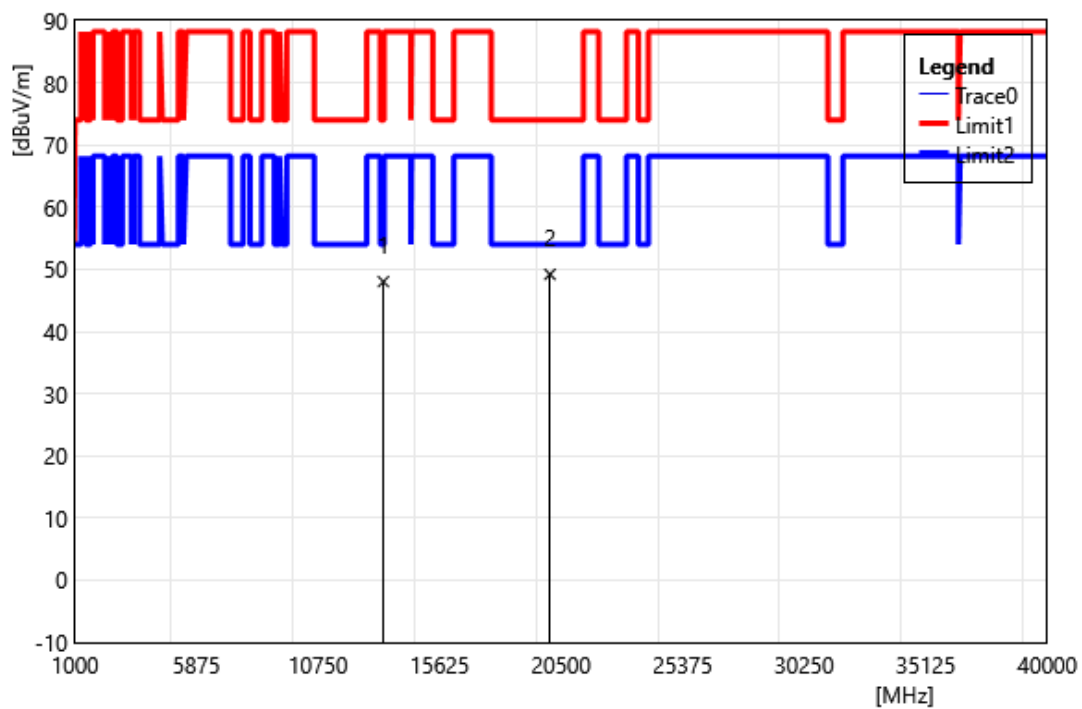


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13370.00	34.35	13.68	48.03	74.00	-25.97	PEAK
2	20055.00	33.01	16.18	49.19	74.00	-24.81	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 6845		
	MHz		
Polarization:	Vertical		
Remark:			

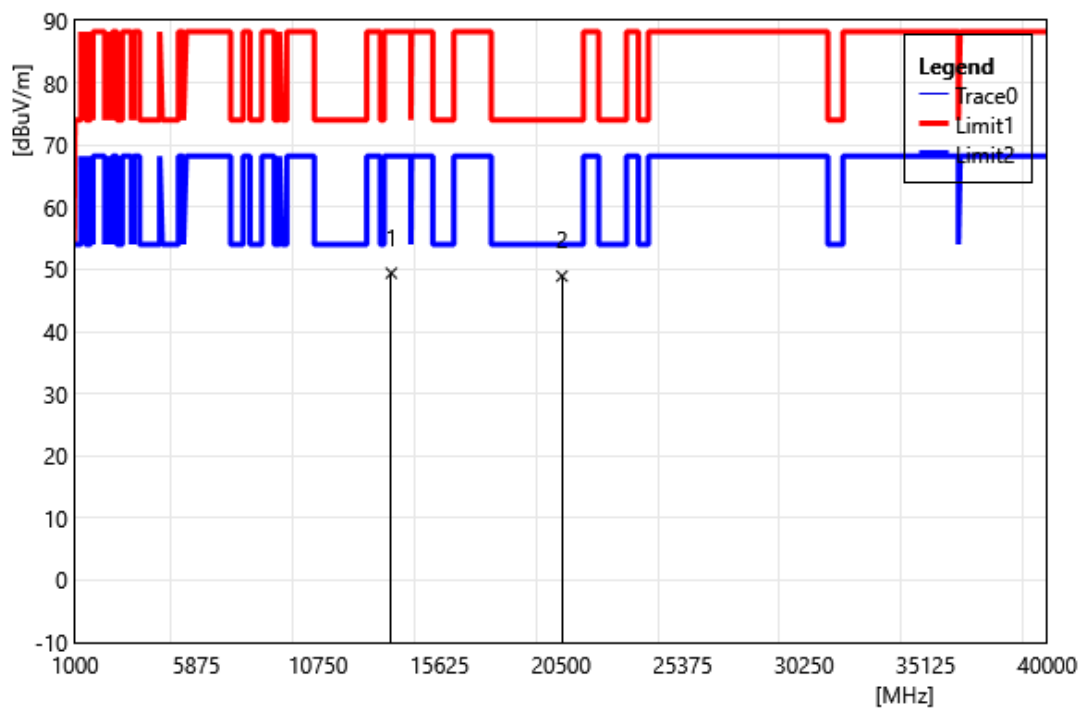


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13690.00	34.81	14.58	49.39	88.20	-38.81	PEAK
2	20535.00	32.36	16.55	48.91	74.00	-25.09	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 6845		
	MHz		
Polarization:	Horizontal		
Remark:			

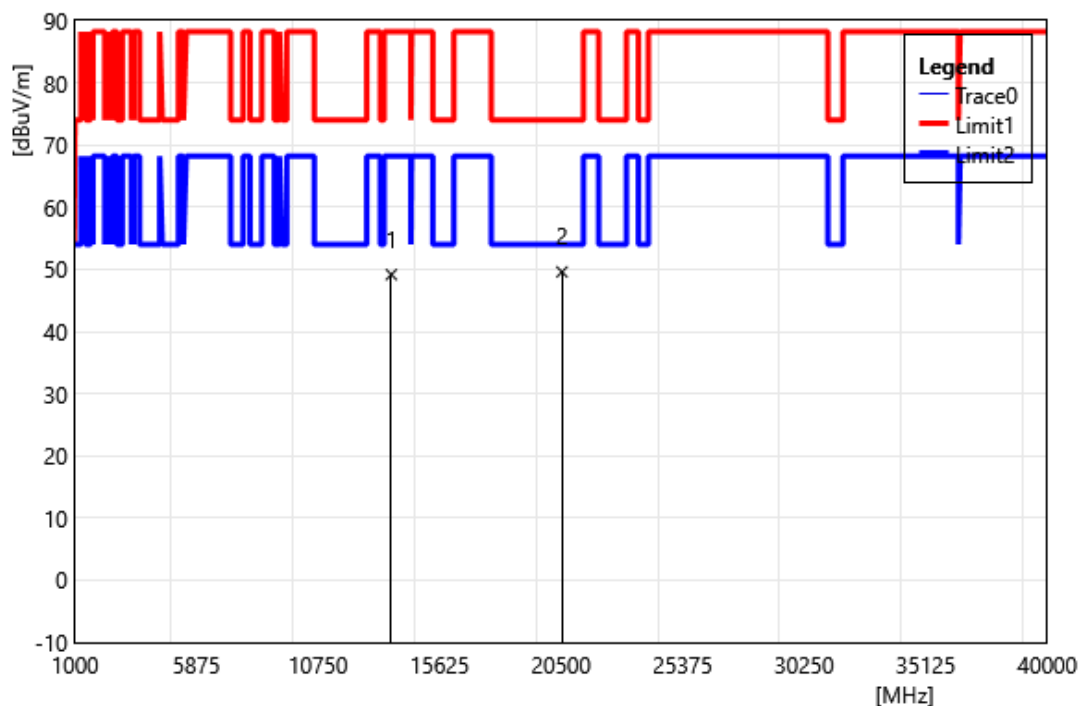


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13690.00	34.56	14.58	49.14	88.20	-39.06	PEAK
2	20535.00	33.04	16.55	49.59	74.00	-24.41	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 6885		
	MHz		
Polarization:	Vertical		
Remark:			

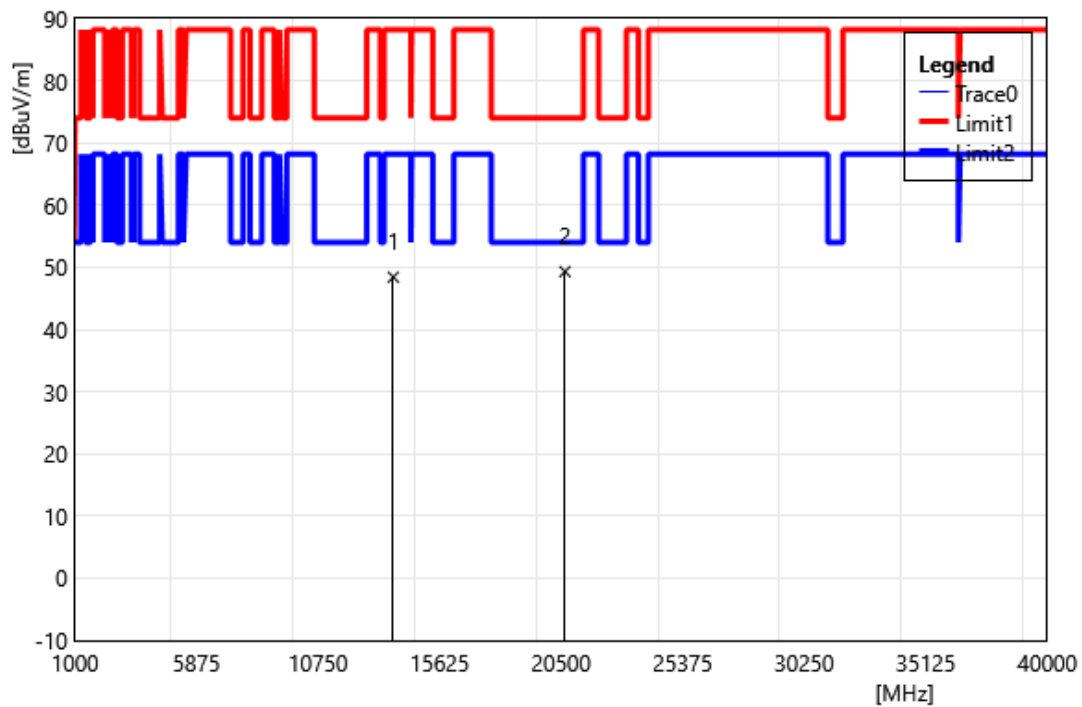


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13770.00	34.04	14.38	48.42	88.20	-39.78	PEAK
2	20655.00	32.62	16.70	49.32	74.00	-24.68	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 6885		
	MHz		
Polarization:	Horizontal		
Remark:			

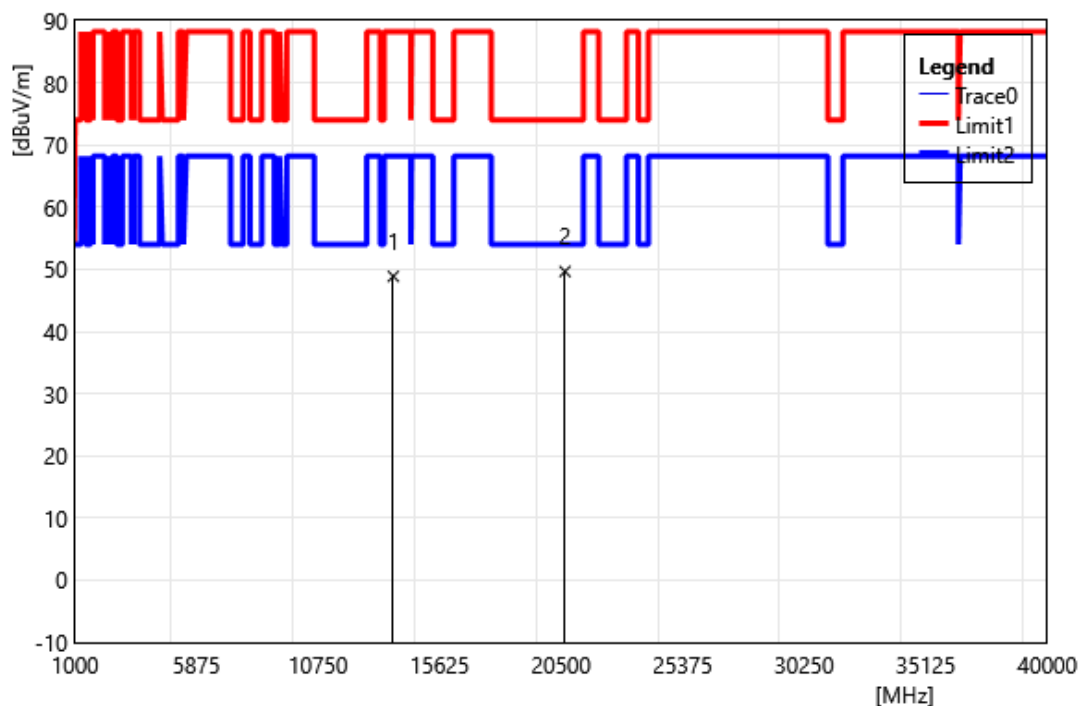


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13770.00	34.50	14.38	48.88	88.20	-39.32	PEAK
2	20655.00	32.96	16.70	49.66	74.00	-24.34	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 6925		
	MHz		
Polarization:	Vertical		
Remark:			

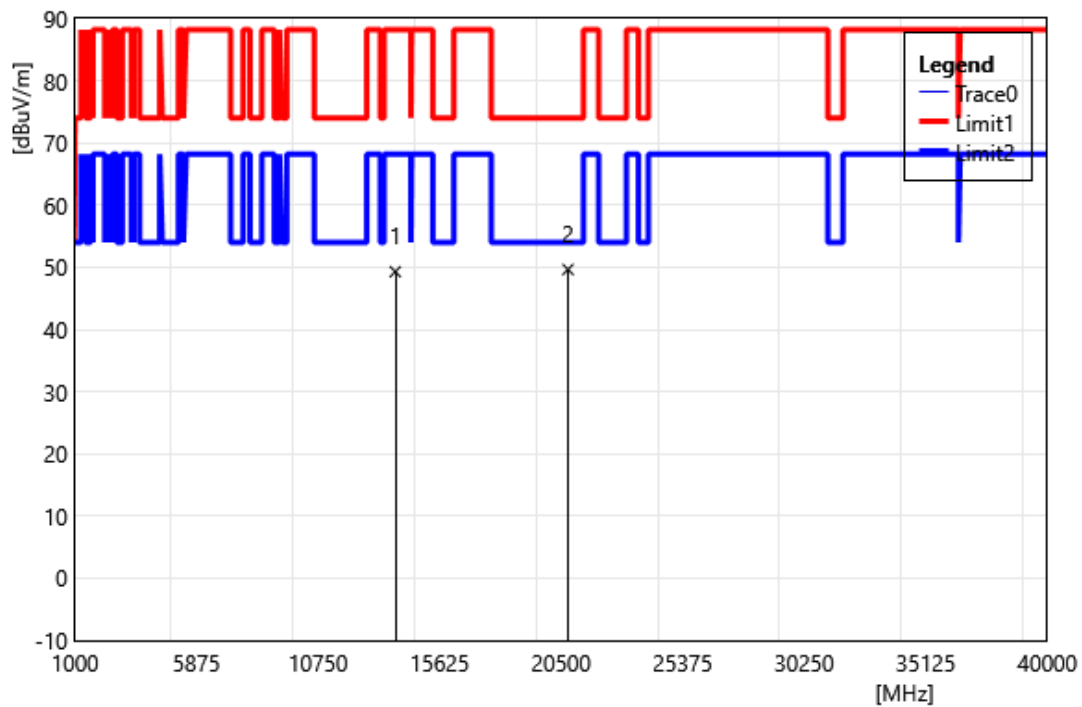


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13850.00	34.73	14.57	49.30	88.20	-38.90	PEAK
2	20775.00	32.80	16.85	49.65	74.00	-24.35	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 6925		
	MHz		
Polarization:	Horizontal		
Remark:			

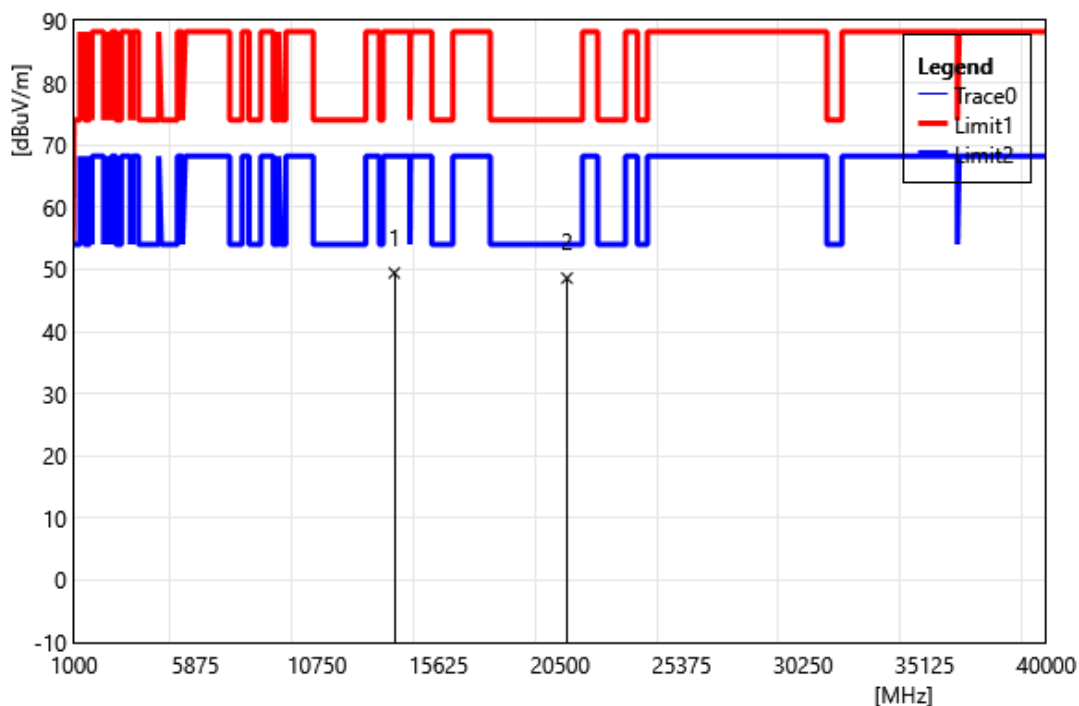


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13850.00	34.85	14.57	49.42	88.20	-38.78	PEAK
2	20775.00	31.75	16.85	48.60	74.00	-25.40	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 7005		
	MHz		
Polarization:	Vertical		
Remark:			

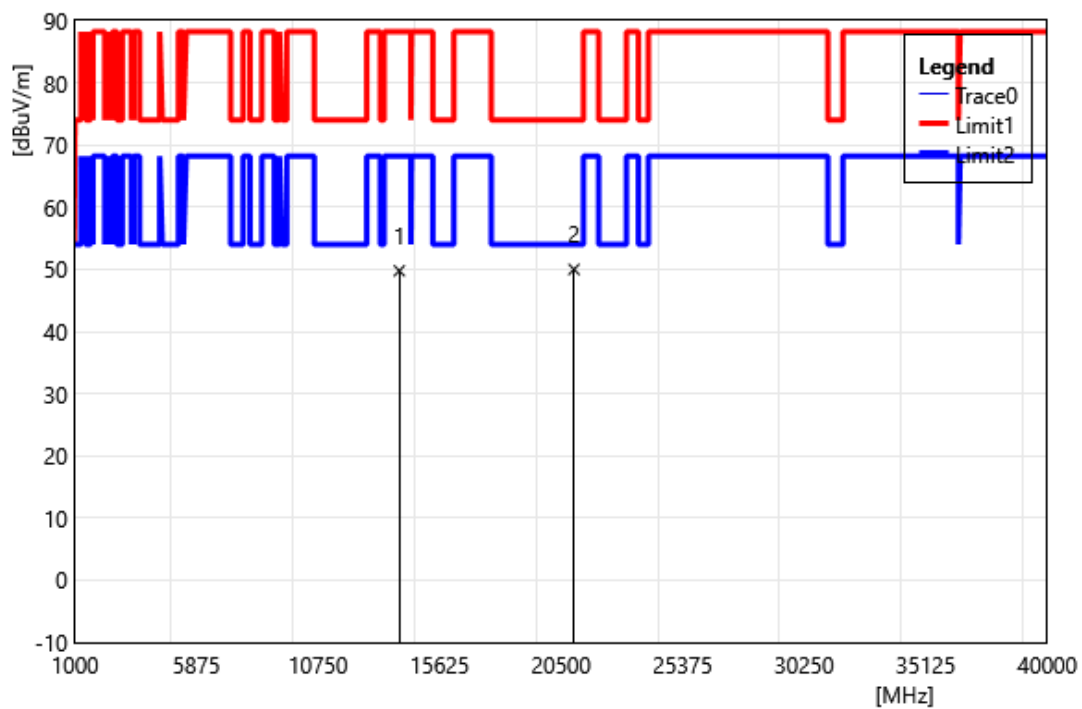


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14010.00	34.85	14.92	49.77	88.20	-38.43	PEAK
2	21015.00	33.86	16.12	49.98	74.00	-24.02	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 7005		
	MHz		
Polarization:	Horizontal		
Remark:			

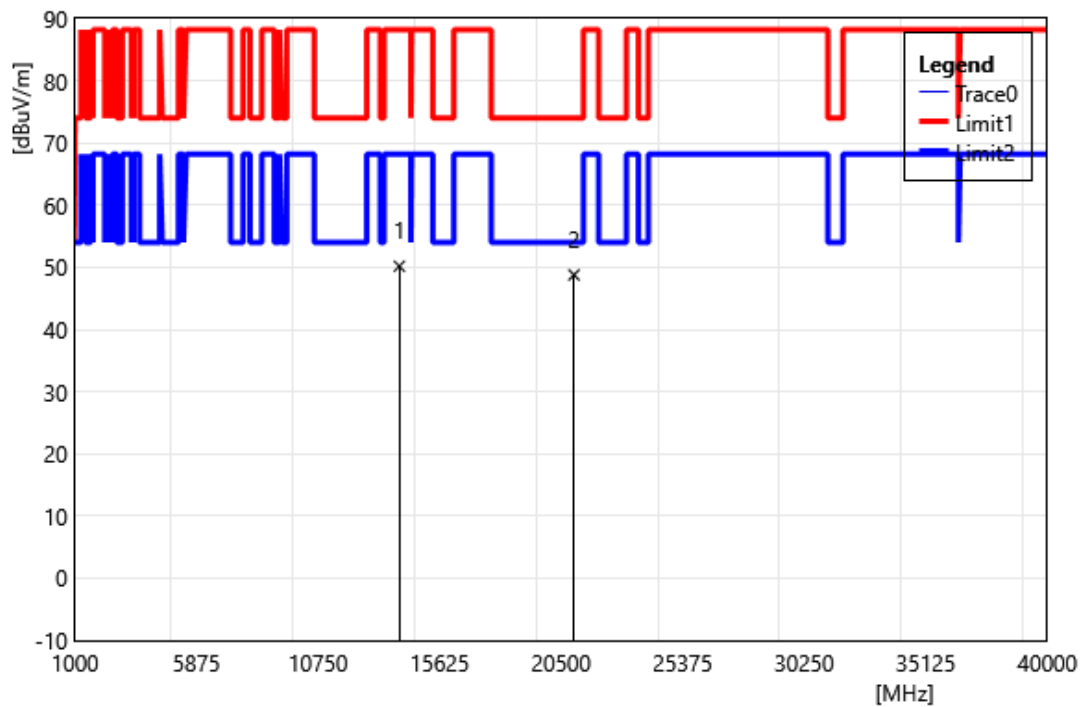


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14010.00	35.26	14.92	50.18	88.20	-38.02	PEAK
2	21015.00	32.67	16.12	48.79	74.00	-25.21	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 7085		
	MHz		
Polarization:	Vertical		
Remark:			

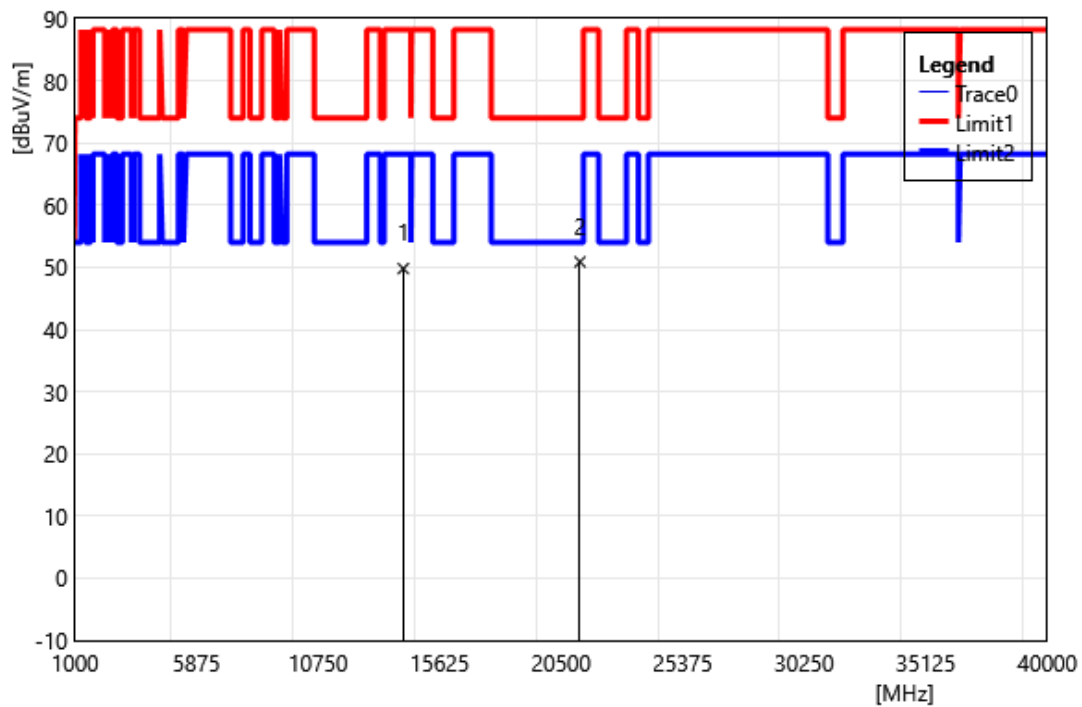


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14170.00	34.29	15.51	49.80	88.20	-38.40	PEAK
2	21255.00	34.52	16.36	50.88	74.00	-23.12	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE40 7085		
	MHz		
Polarization:	Horizontal		
Remark:			

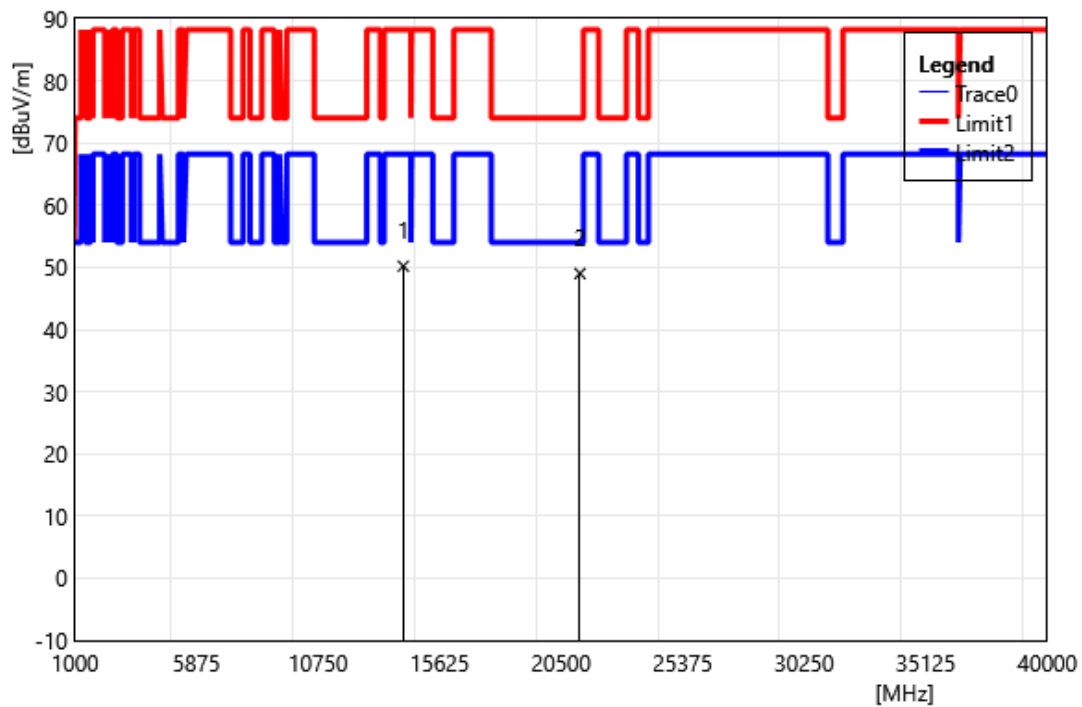


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14170.00	34.68	15.51	50.19	88.20	-38.01	PEAK
2	21255.00	32.65	16.36	49.01	74.00	-24.99	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5985		
	MHz		
Polarization:	Vertical		
Remark:			

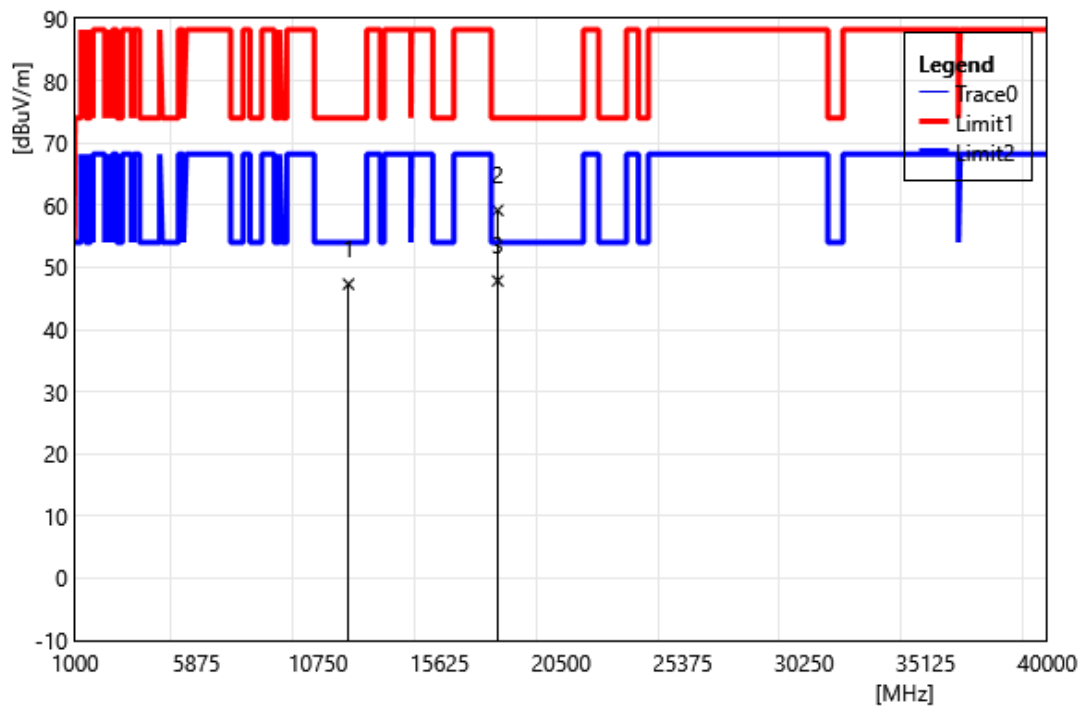


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11970.00	35.51	11.79	47.30	74.00	-26.70	PEAK
2	17955.00	33.63	25.54	59.17	74.00	-14.83	PEAK
3	17955.00	22.28	25.54	47.82	54.00	-6.18	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 5985		
	MHz		
Polarization:	Horizontal		
Remark:			

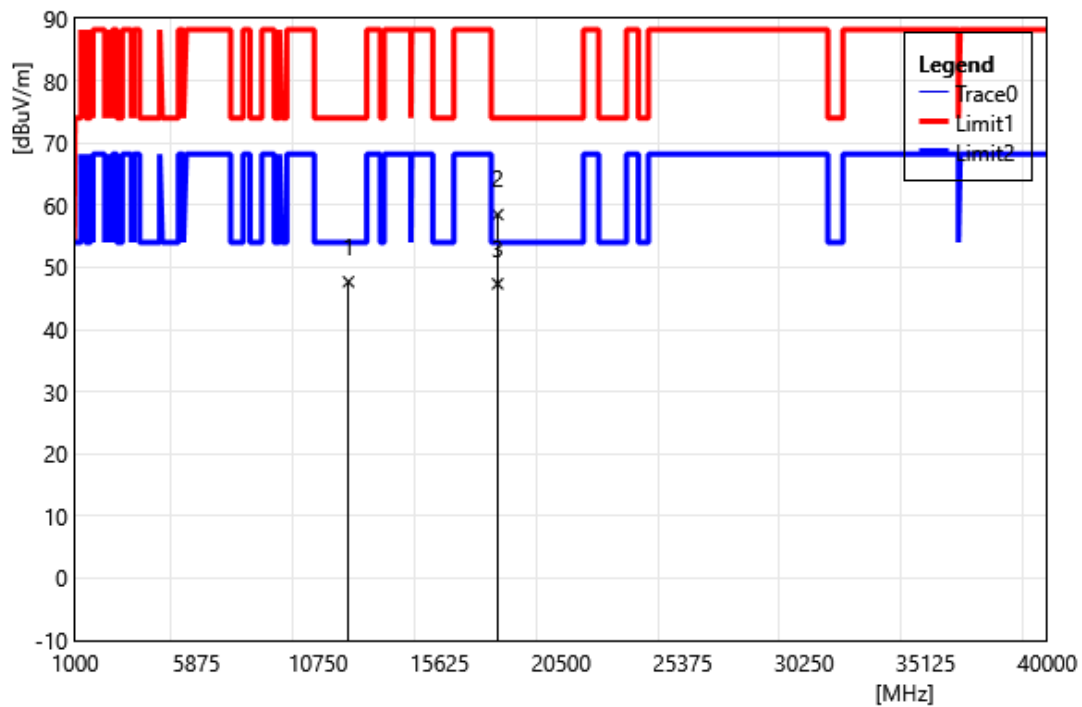


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11970.00	35.90	11.79	47.69	74.00	-26.31	PEAK
2	17955.00	32.94	25.54	58.48	74.00	-15.52	PEAK
3	17955.00	21.81	25.54	47.35	54.00	-6.65	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 6145		
	MHz		
Polarization:	Vertical		
Remark:			

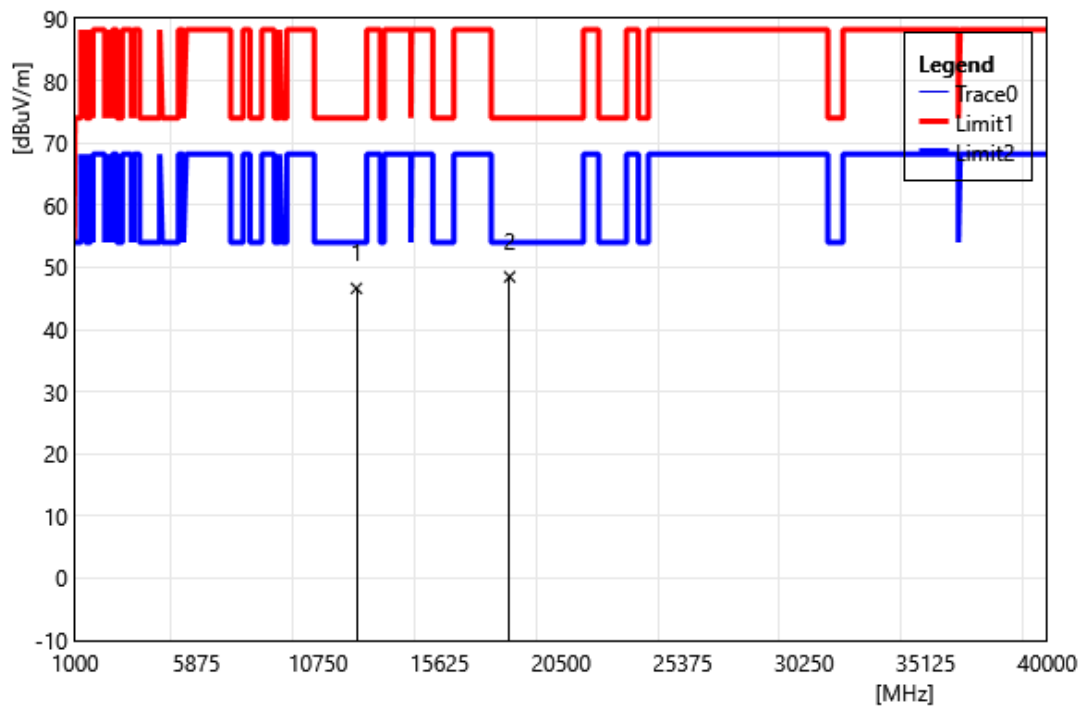


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12290.00	34.77	11.84	46.61	74.00	-27.39	PEAK
2	18435.00	33.21	15.26	48.47	74.00	-25.53	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 6145		
	MHz		
Polarization:	Horizontal		
Remark:			

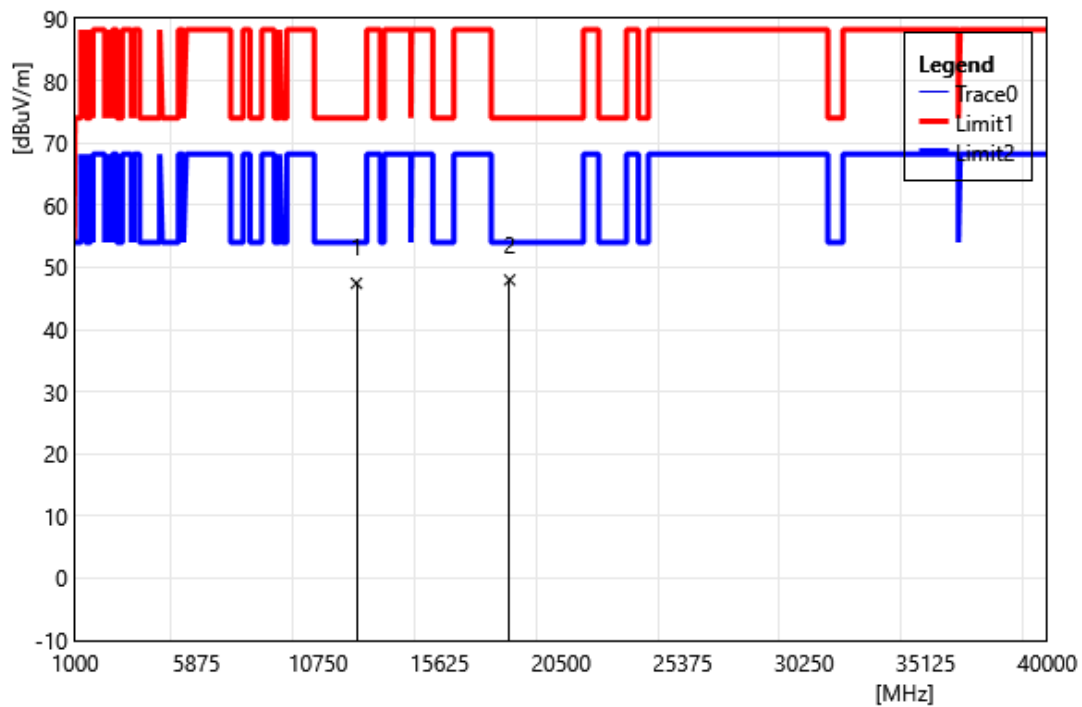


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12290.00	35.60	11.84	47.44	74.00	-26.56	PEAK
2	18435.00	32.71	15.26	47.97	74.00	-26.03	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 6385		
	MHz		
Polarization:	Vertical		
Remark:			

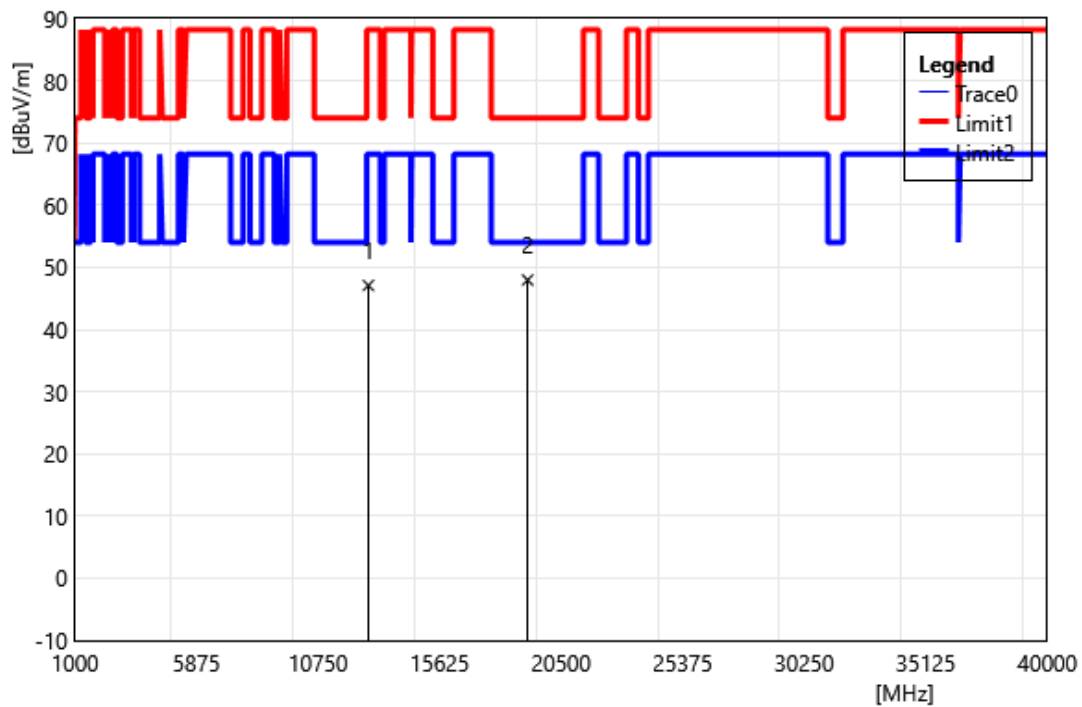


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12770.00	34.50	12.59	47.09	88.20	-41.11	PEAK
2	19155.00	32.08	15.87	47.95	74.00	-26.05	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 6385		
	MHz		
Polarization:	Horizontal		
Remark:			

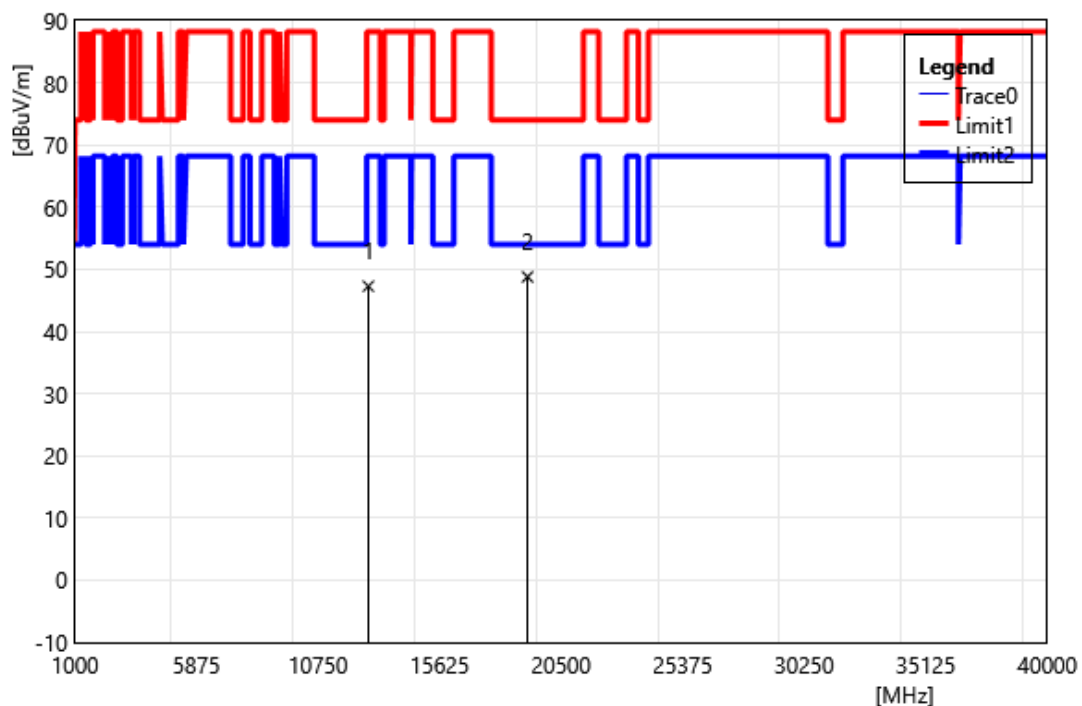


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12770.00	34.70	12.59	47.29	88.20	-40.91	PEAK
2	19155.00	32.92	15.87	48.79	74.00	-25.21	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 6465		
	MHz		
Polarization:	Vertical		
Remark:			

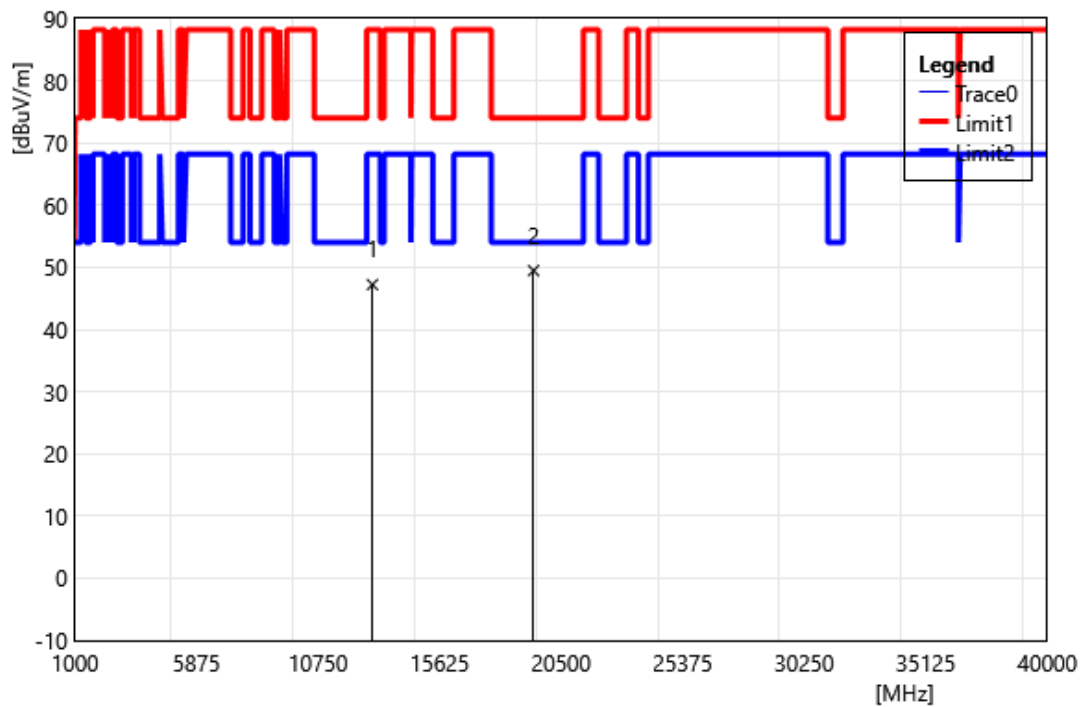


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12930.00	34.33	12.90	47.23	88.20	-40.97	PEAK
2	19395.00	33.14	16.32	49.46	74.00	-24.54	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 6465		
	MHz		
Polarization:	Horizontal		
Remark:			

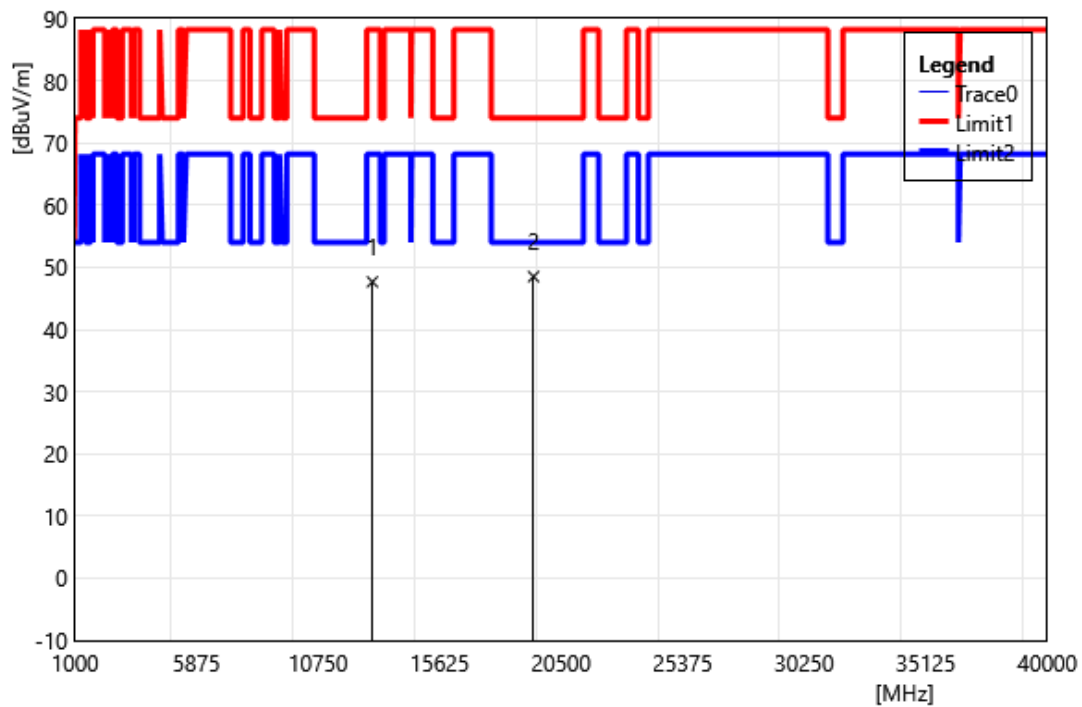


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12930.00	34.76	12.90	47.66	88.20	-40.54	PEAK
2	19395.00	32.20	16.32	48.52	74.00	-25.48	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 6545		
	MHz		
Polarization:	Vertical		
Remark:			

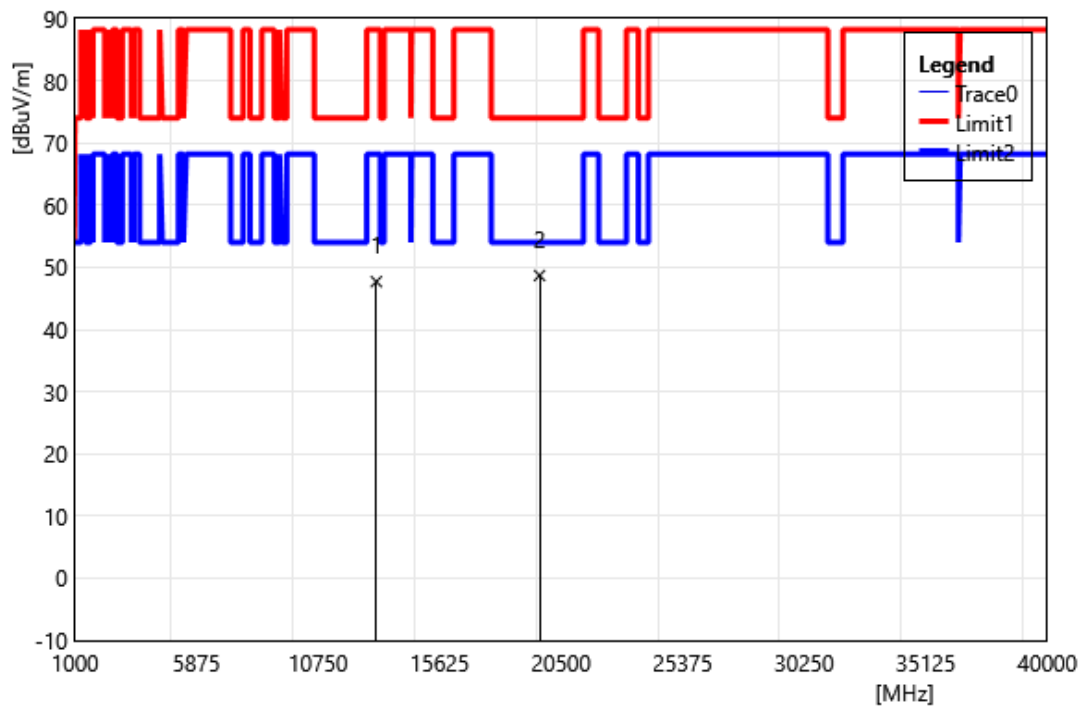


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13090.00	34.75	12.95	47.70	88.20	-40.50	PEAK
2	19635.00	32.71	15.98	48.69	74.00	-25.31	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 6545		
	MHz		
Polarization:	Horizontal		
Remark:			

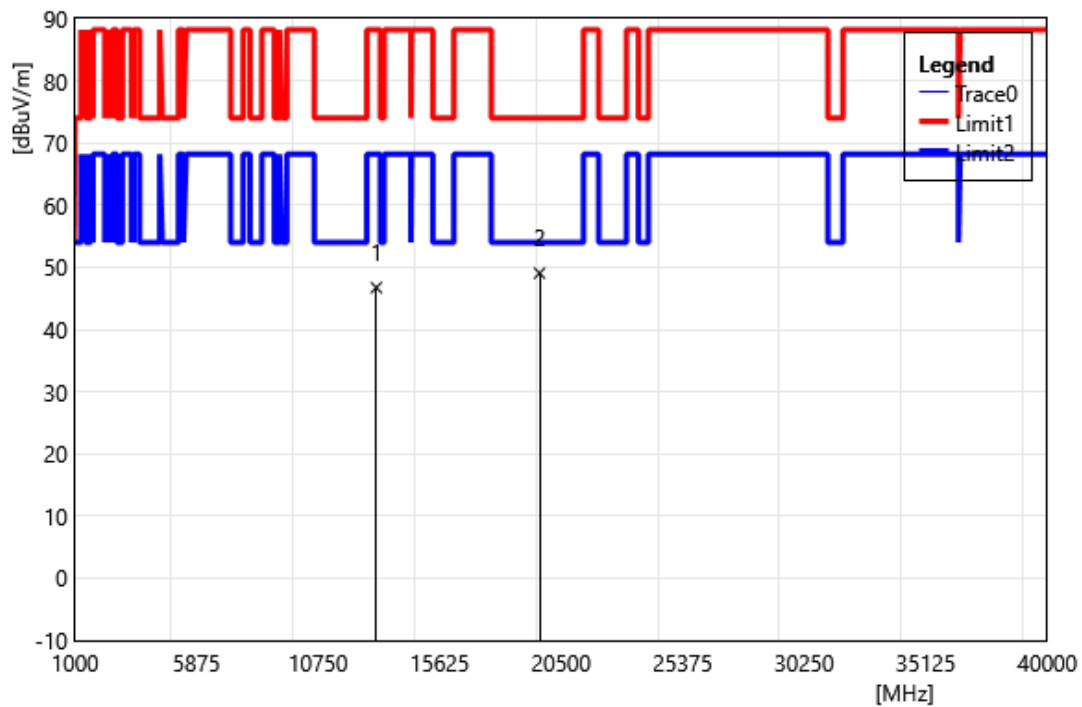


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13090.00	33.79	12.95	46.74	88.20	-41.46	PEAK
2	19635.00	33.10	15.98	49.08	74.00	-24.92	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 6625		
	MHz		
Polarization:	Vertical		
Remark:			

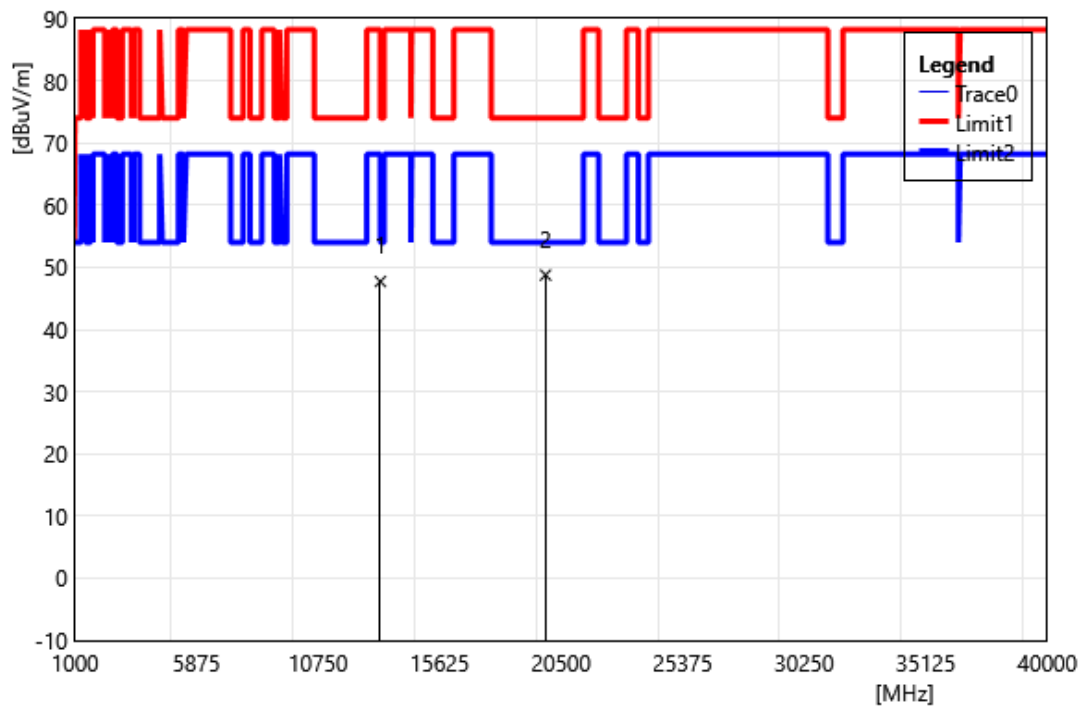


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13250.00	34.49	13.24	47.73	74.00	-26.27	PEAK
2	19875.00	32.41	16.35	48.76	74.00	-25.24	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 6625		
	MHz		
Polarization:	Horizontal		
Remark:			

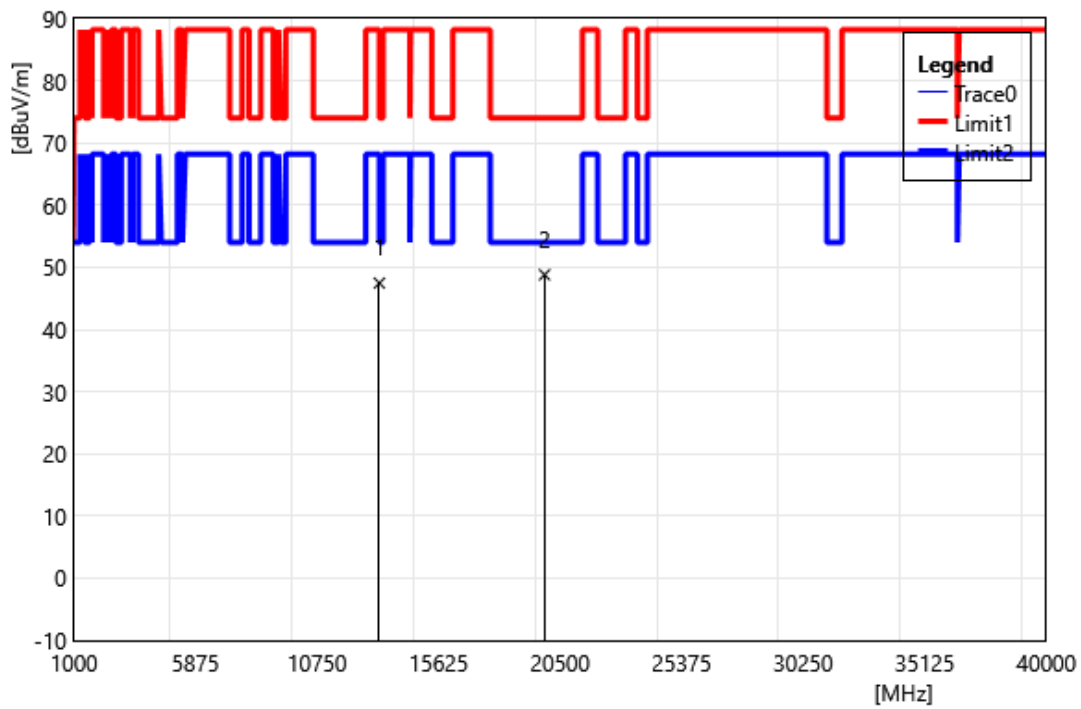


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13250.00	34.23	13.24	47.47	74.00	-26.53	PEAK
2	19875.00	32.46	16.35	48.81	74.00	-25.19	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 6705		
	MHz		
Polarization:	Vertical		
Remark:			

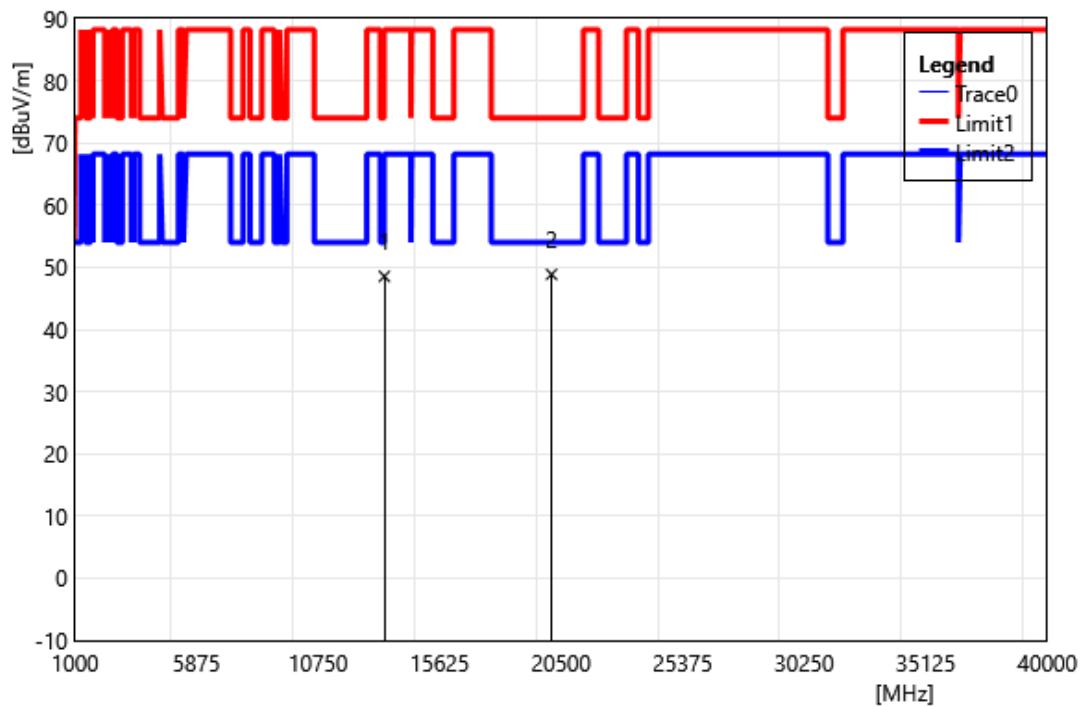


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13410.00	34.67	13.88	48.55	88.20	-39.65	PEAK
2	20115.00	32.60	16.27	48.87	74.00	-25.13	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 6705		
	MHz		
Polarization:	Horizontal		
Remark:			

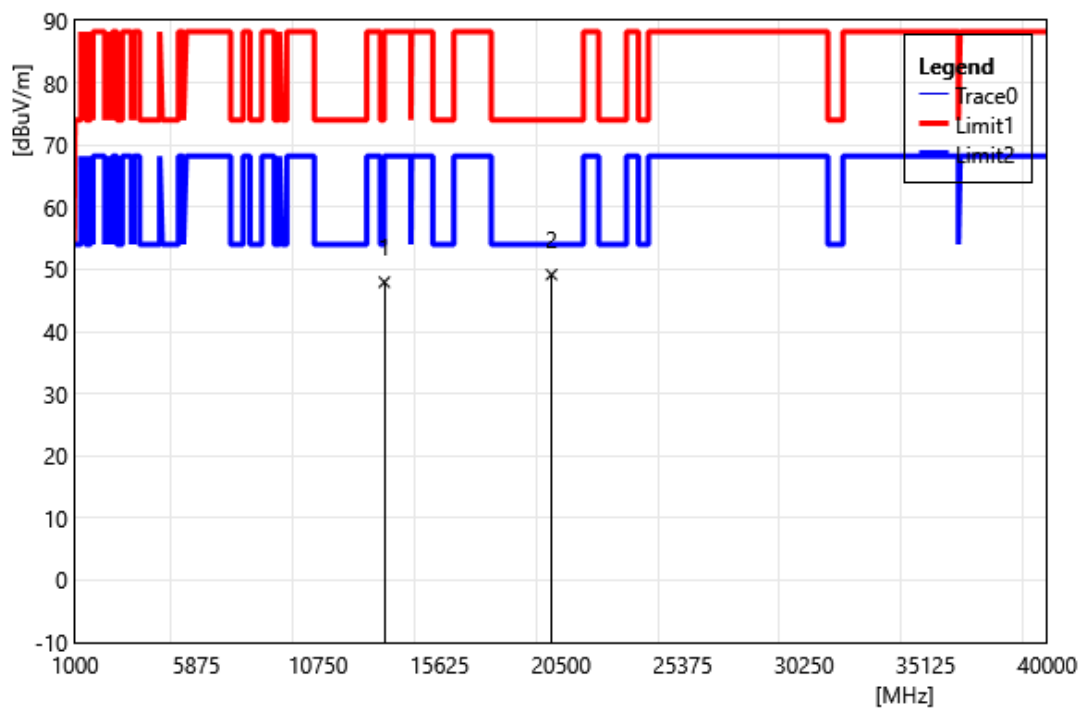


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13410.00	34.06	13.88	47.94	88.20	-40.26	PEAK
2	20115.00	32.87	16.27	49.14	74.00	-24.86	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 6785		
	MHz		
Polarization:	Vertical		
Remark:			

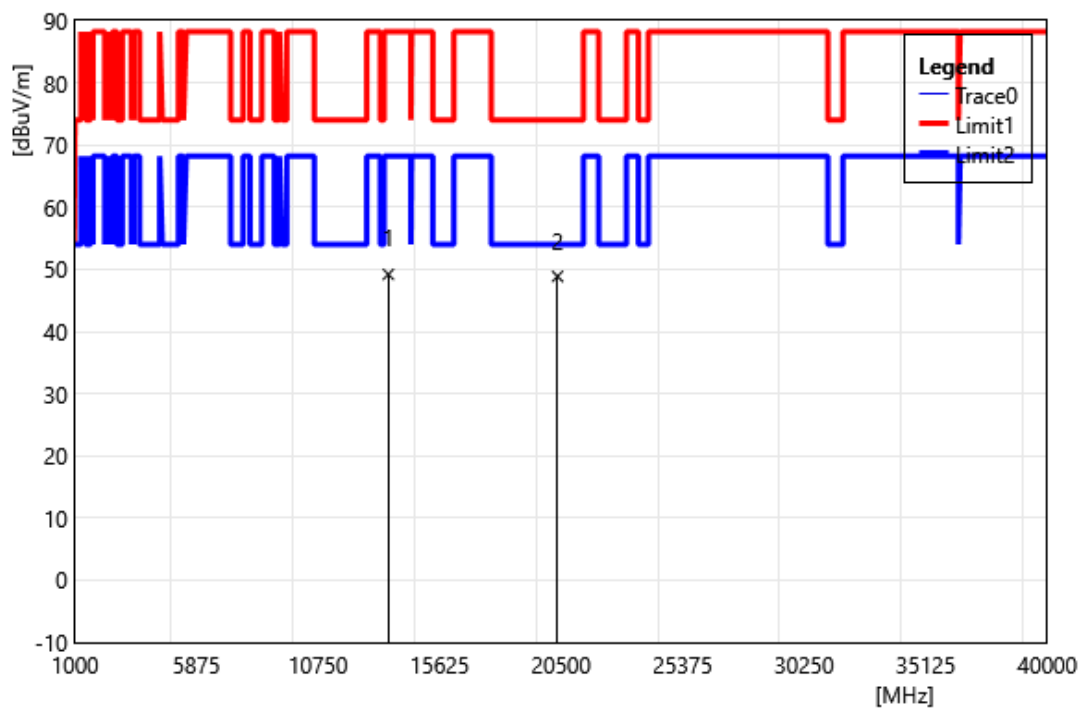


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13570.00	34.80	14.39	49.19	88.20	-39.01	PEAK
2	20355.00	32.28	16.59	48.87	74.00	-25.13	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 6785		
	MHz		
Polarization:	Horizontal		
Remark:			

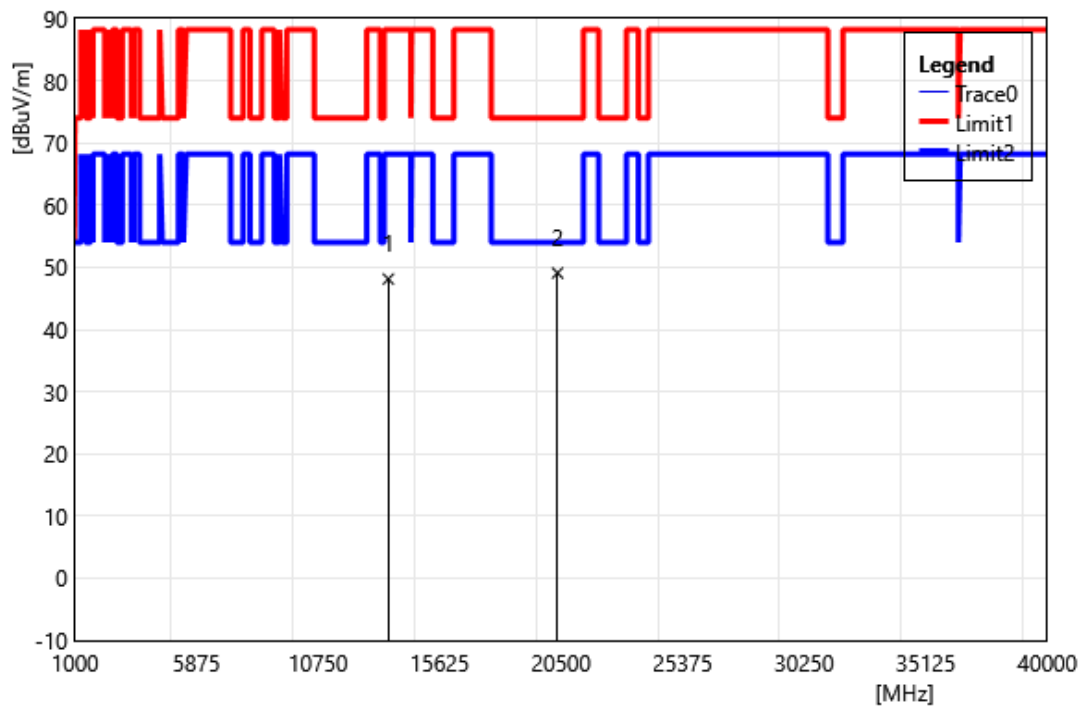


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13570.00	33.74	14.39	48.13	88.20	-40.07	PEAK
2	20355.00	32.50	16.59	49.09	74.00	-24.91	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 6865		
	MHz		
Polarization:	Vertical		
Remark:			

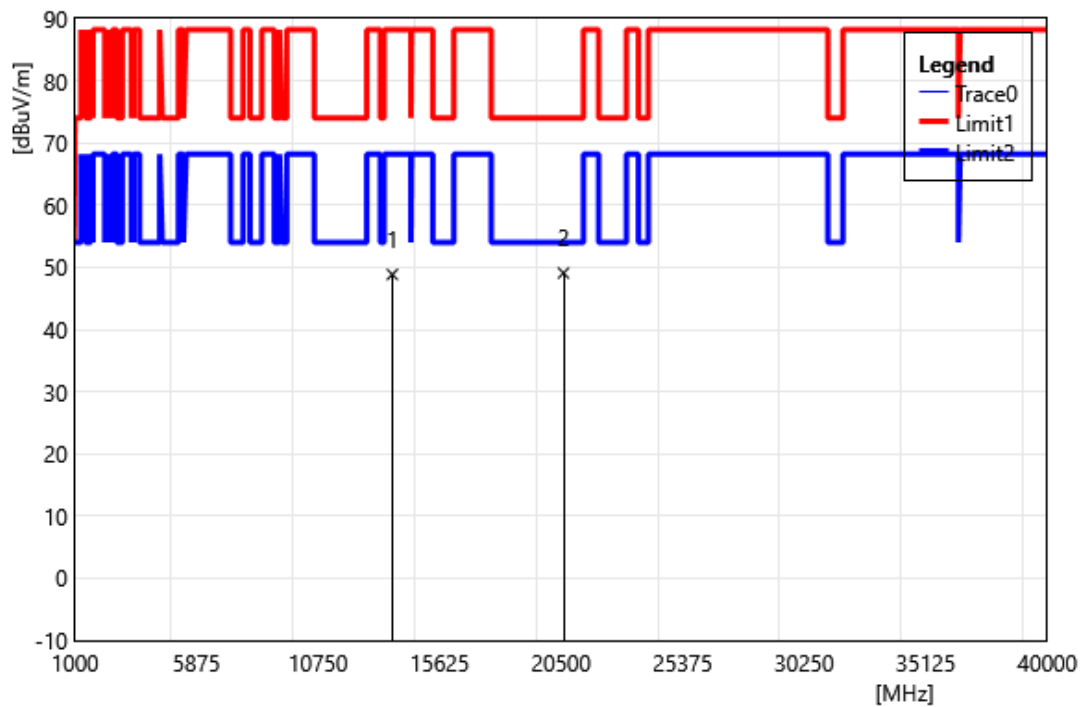


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13730.00	34.35	14.50	48.85	88.20	-39.35	PEAK
2	20595.00	32.47	16.63	49.10	74.00	-24.90	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 6865		
	MHz		
Polarization:	Horizontal		
Remark:			

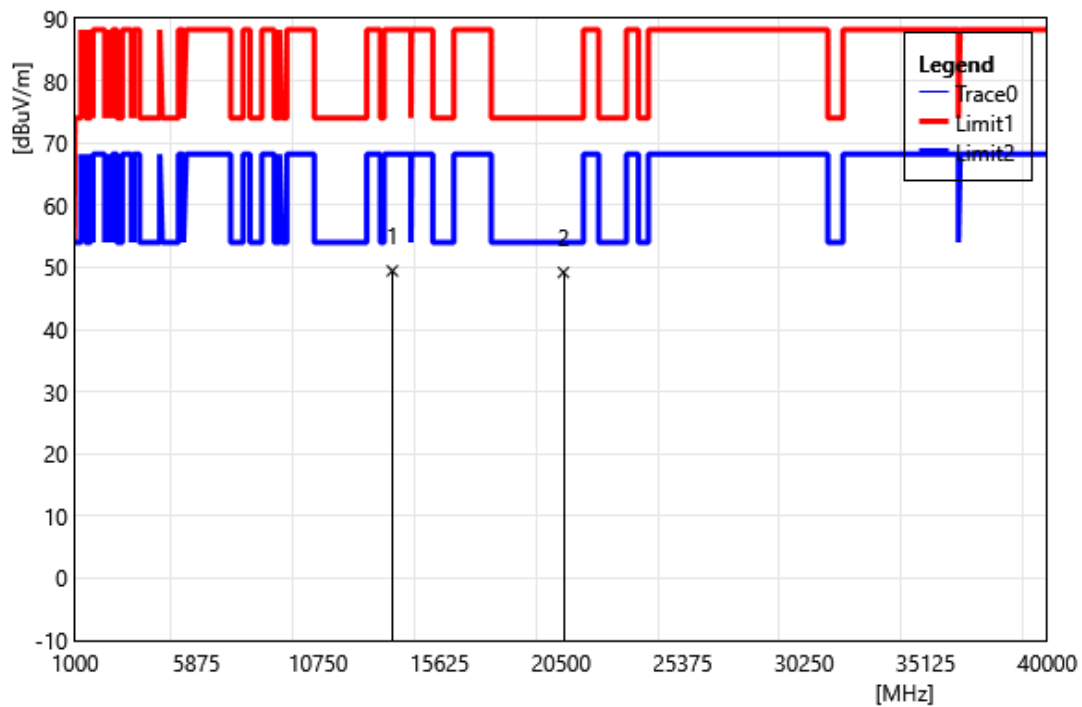


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13730.00	34.93	14.50	49.43	88.20	-38.77	PEAK
2	20595.00	32.55	16.63	49.18	74.00	-24.82	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 6945		
	MHz		
Polarization:	Vertical		
Remark:			

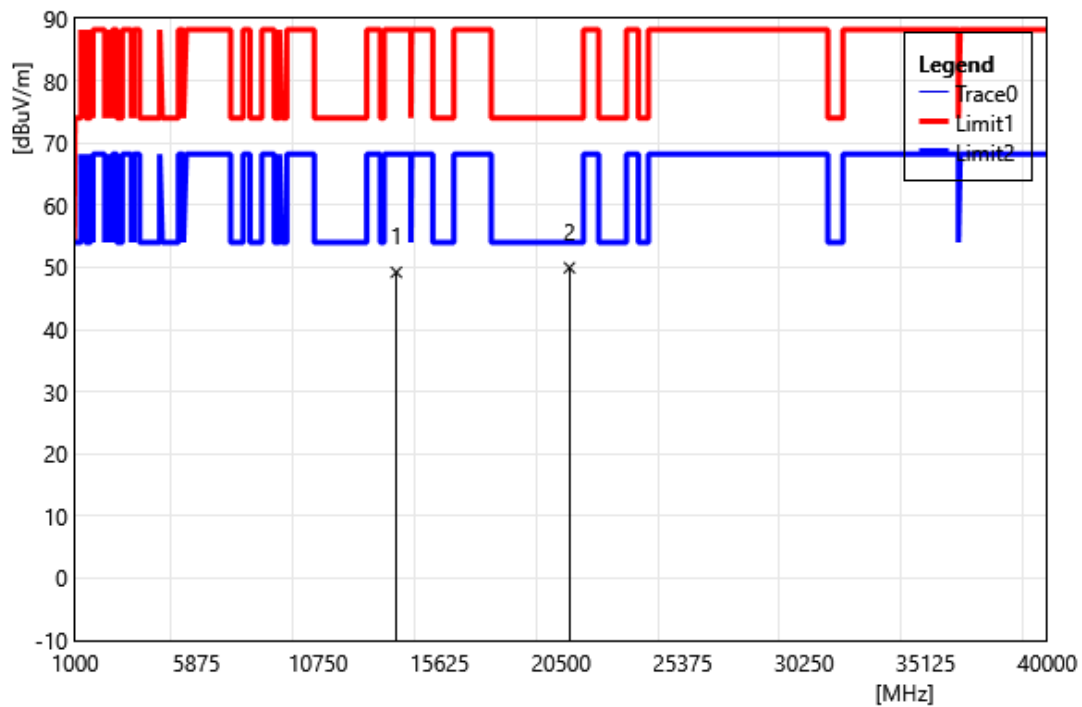


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13890.00	34.40	14.81	49.21	88.20	-38.99	PEAK
2	20835.00	33.00	16.93	49.93	74.00	-24.07	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 6945		
	MHz		
Polarization:	Horizontal		
Remark:			

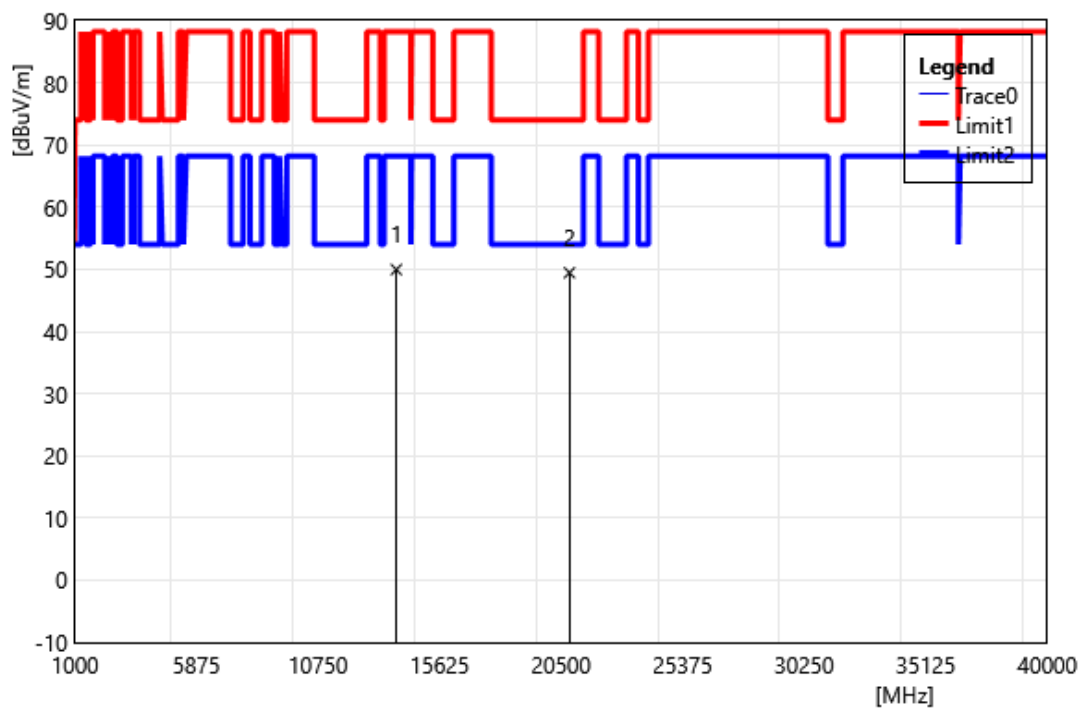


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13890.00	35.16	14.81	49.97	88.20	-38.23	PEAK
2	20835.00	32.52	16.93	49.45	74.00	-24.55	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 7025		
	MHz		
Polarization:	Vertical		
Remark:			

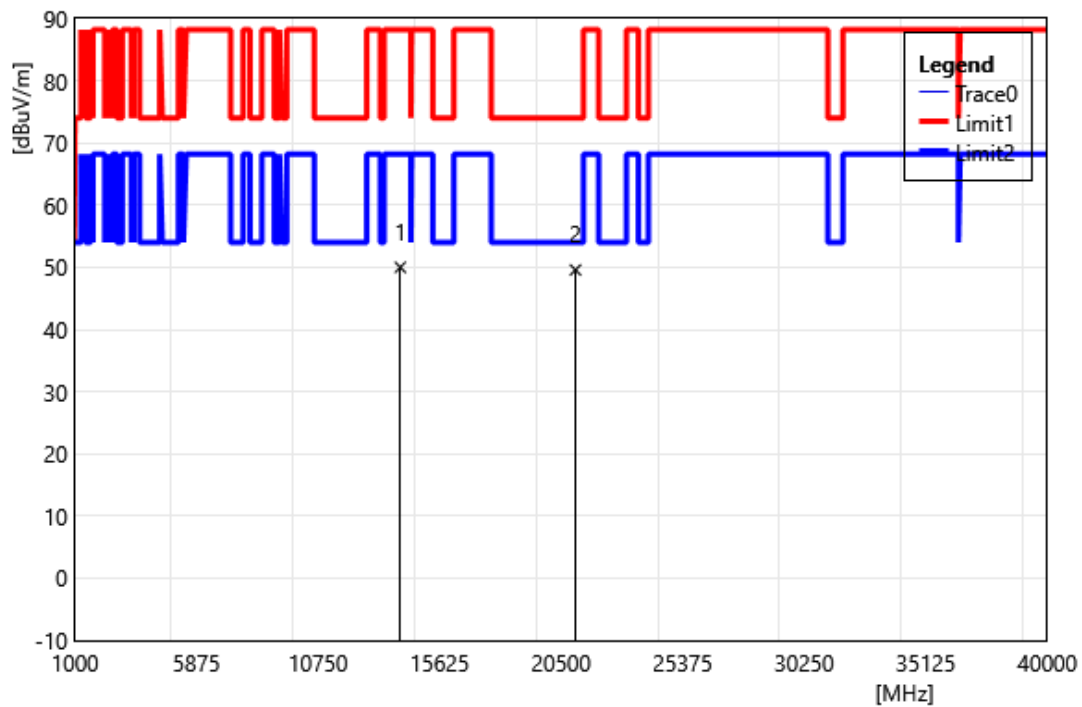


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14050.00	34.79	15.21	50.00	88.20	-38.20	PEAK
2	21075.00	33.41	16.18	49.59	74.00	-24.41	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE80 7025		
	MHz		
Polarization:	Horizontal		
Remark:			

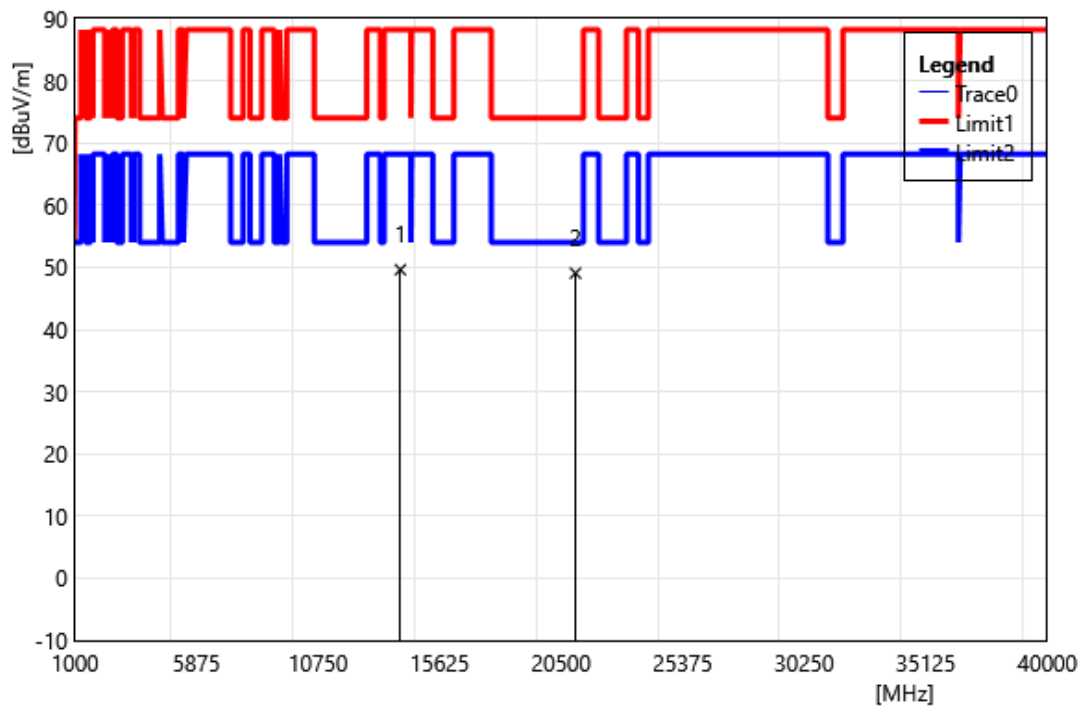


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14050.00	34.41	15.21	49.62	88.20	-38.58	PEAK
2	21075.00	32.89	16.18	49.07	74.00	-24.93	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE160 6025		
	MHz		
Polarization:	Vertical		
Remark:			

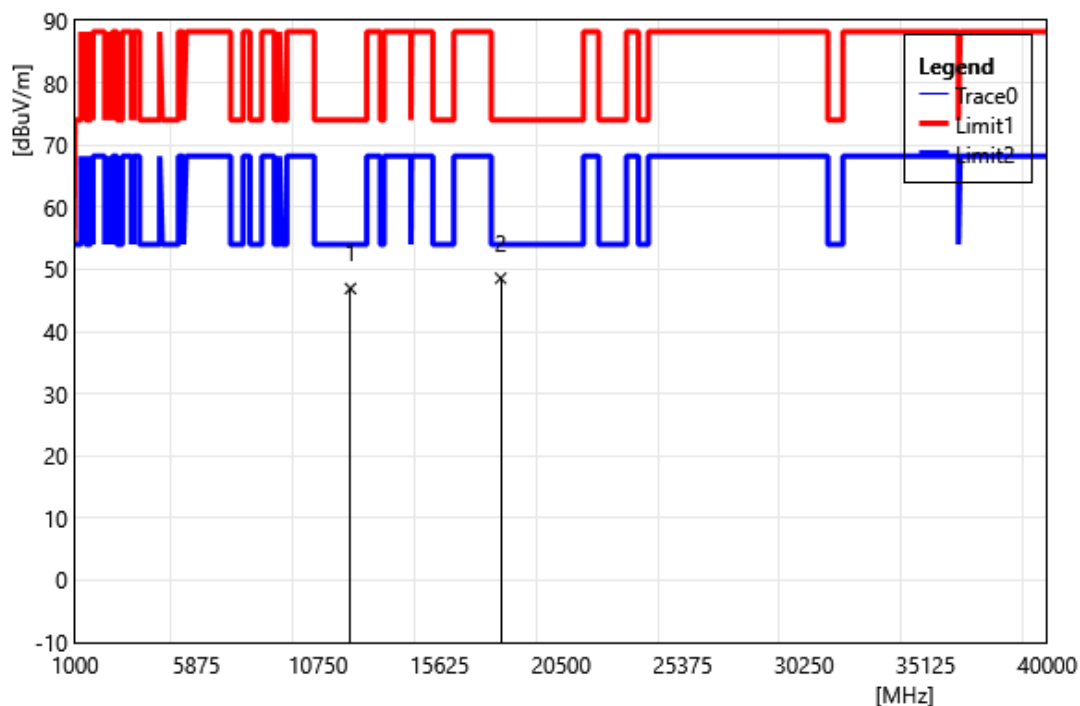


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12050.00	35.03	11.88	46.91	74.00	-27.09	PEAK
2	18075.00	34.30	14.27	48.57	74.00	-25.43	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE160 6025		
	MHz		
Polarization:	Horizontal		
Remark:			

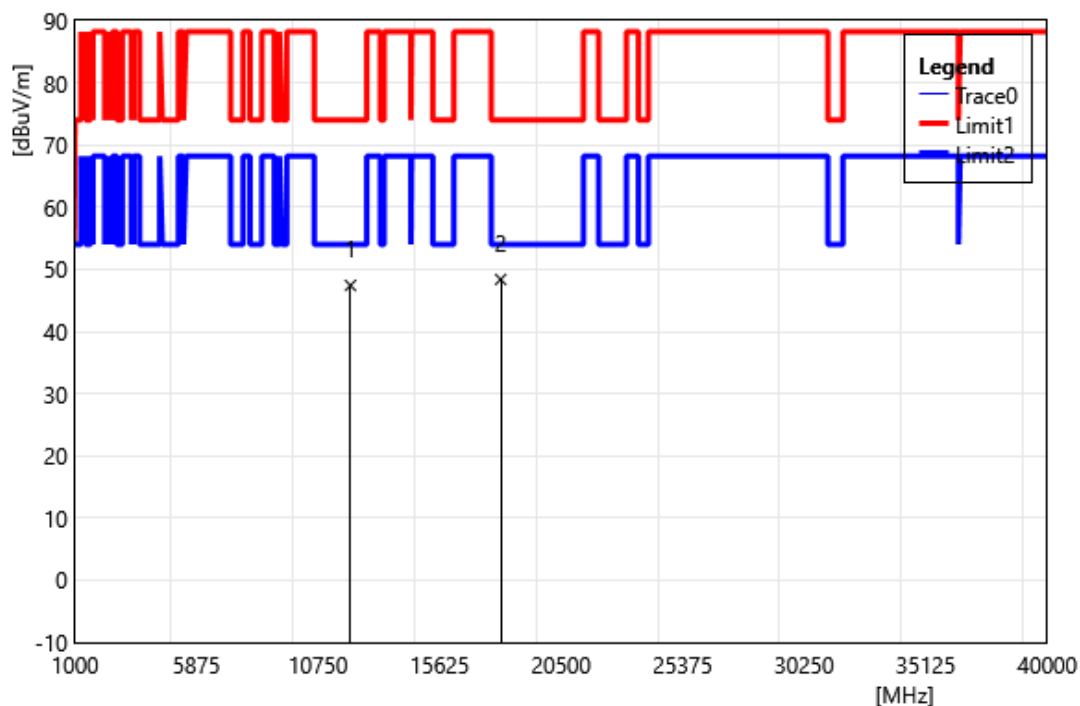


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12050.00	35.53	11.88	47.41	74.00	-26.59	PEAK
2	18075.00	34.11	14.27	48.38	74.00	-25.62	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE160 6185		
	MHz		
Polarization:	Vertical		
Remark:			

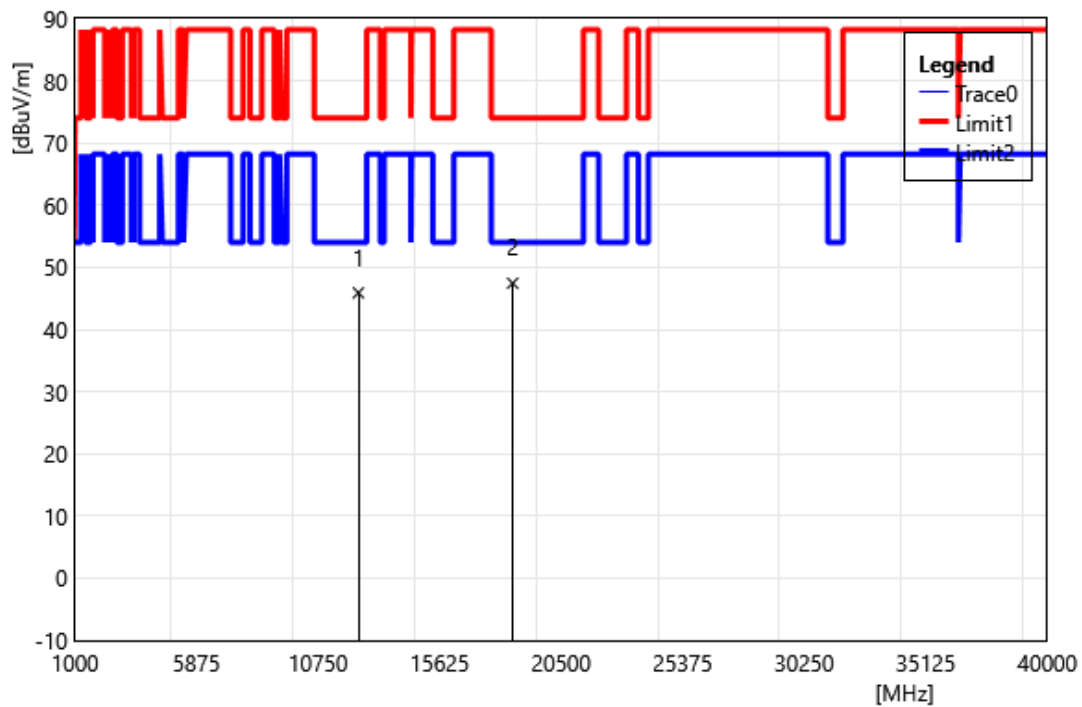


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12370.00	34.23	11.66	45.89	74.00	-28.11	PEAK
2	18555.00	32.47	14.97	47.44	74.00	-26.56	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE160 6185		
	MHz		
Polarization:	Horizontal		
Remark:			

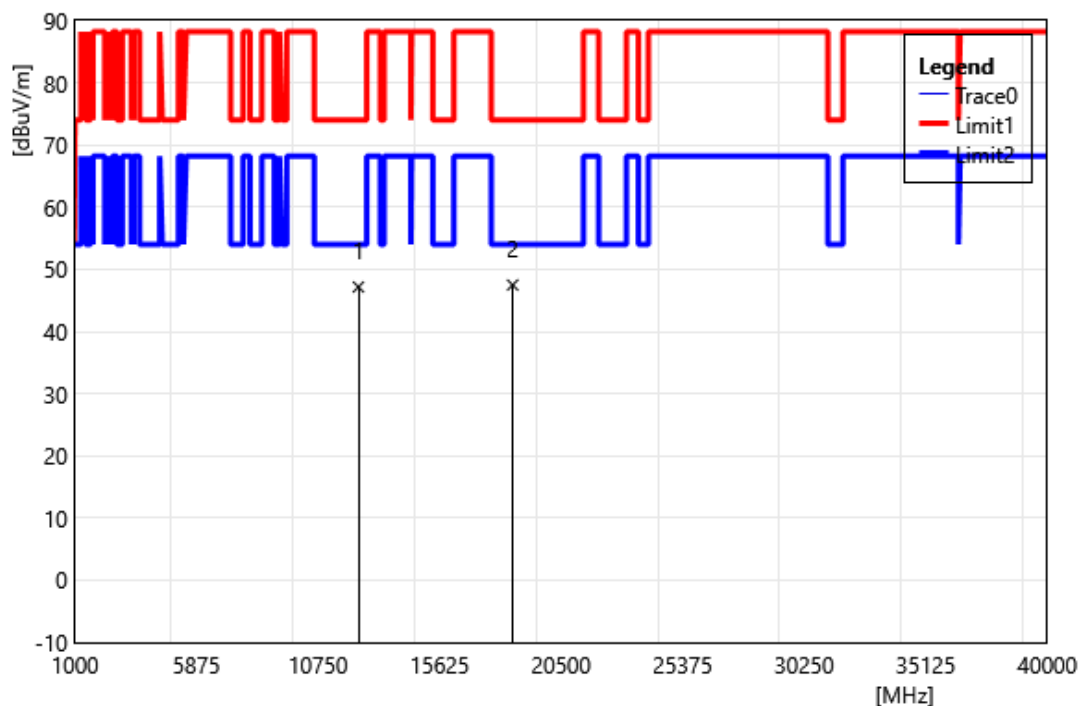


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12370.00	35.50	11.66	47.16	74.00	-26.84	PEAK
2	18555.00	32.51	14.97	47.48	74.00	-26.52	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE160 6345		
	MHz		
Polarization:	Vertical		
Remark:			

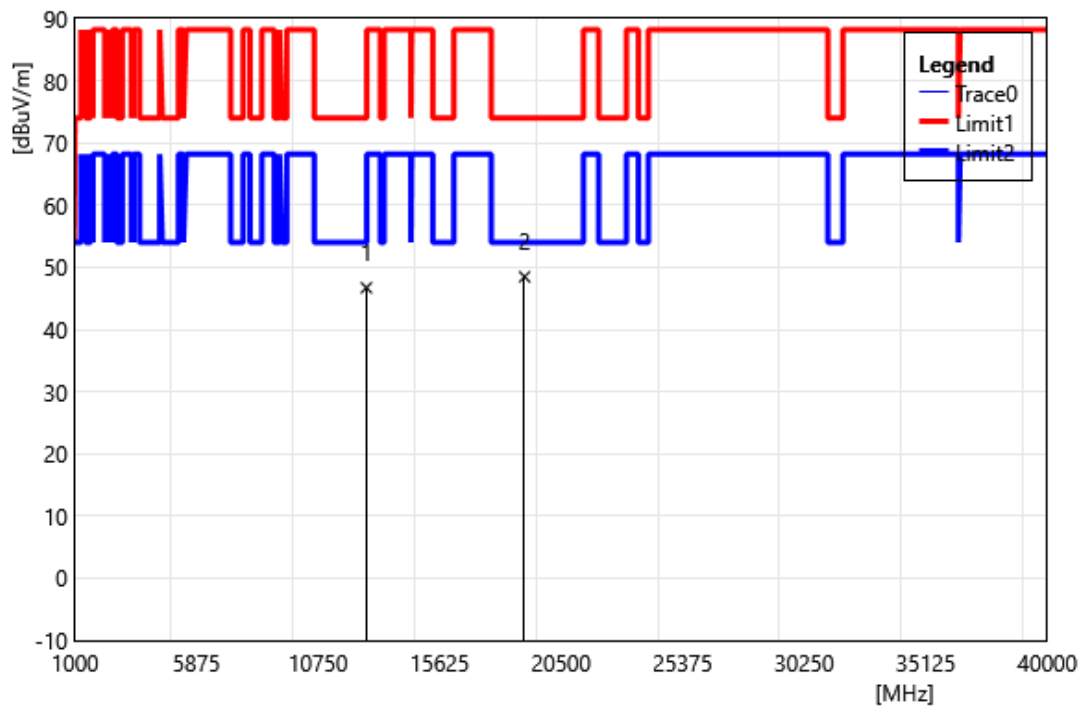


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12690.00	34.51	12.21	46.72	74.00	-27.28	PEAK
2	19035.00	32.84	15.64	48.48	74.00	-25.52	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE160 6345		
	MHz		
Polarization:	Horizontal		
Remark:			

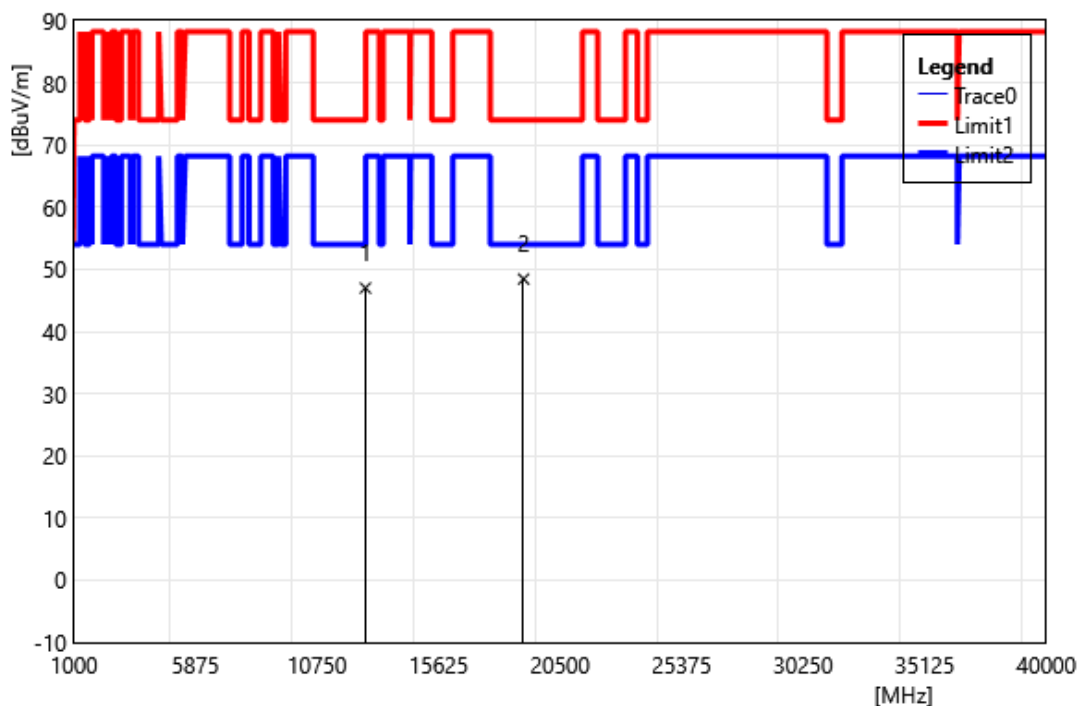


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12690.00	34.79	12.21	47.00	74.00	-27.00	PEAK
2	19035.00	32.80	15.64	48.44	74.00	-25.56	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE160 6505		
	MHz		
Polarization:	Vertical		
Remark:			

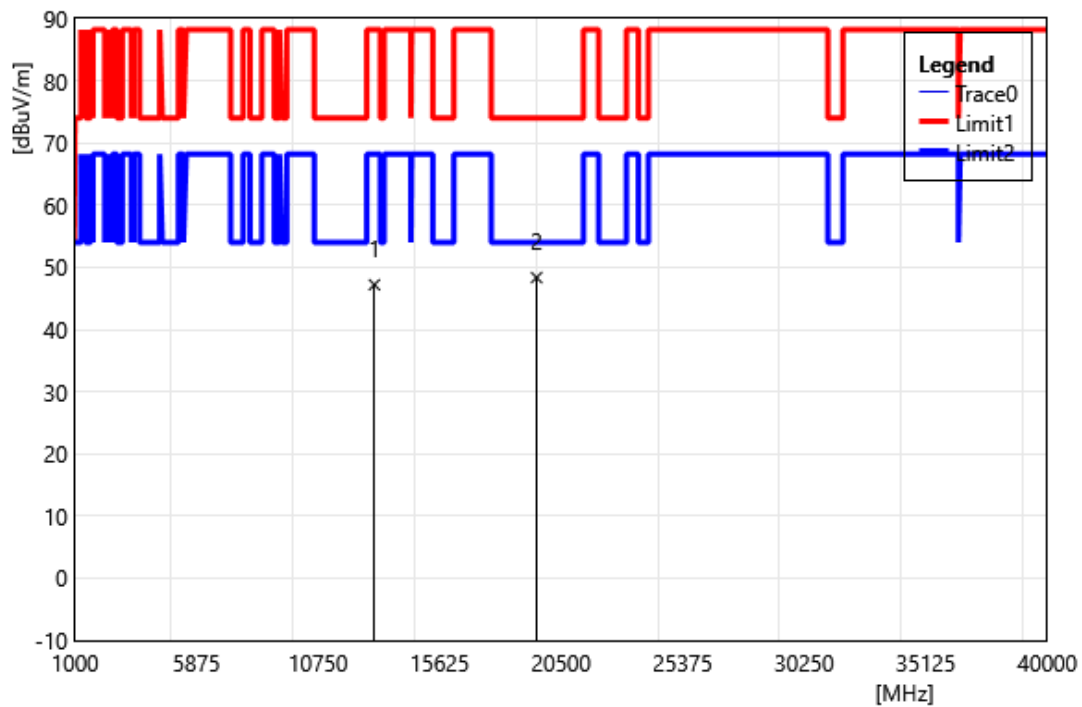


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13010.00	34.16	13.03	47.19	88.20	-41.01	PEAK
2	19515.00	32.56	15.80	48.36	74.00	-25.64	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE160 6505		
	MHz		
Polarization:	Horizontal		
Remark:			

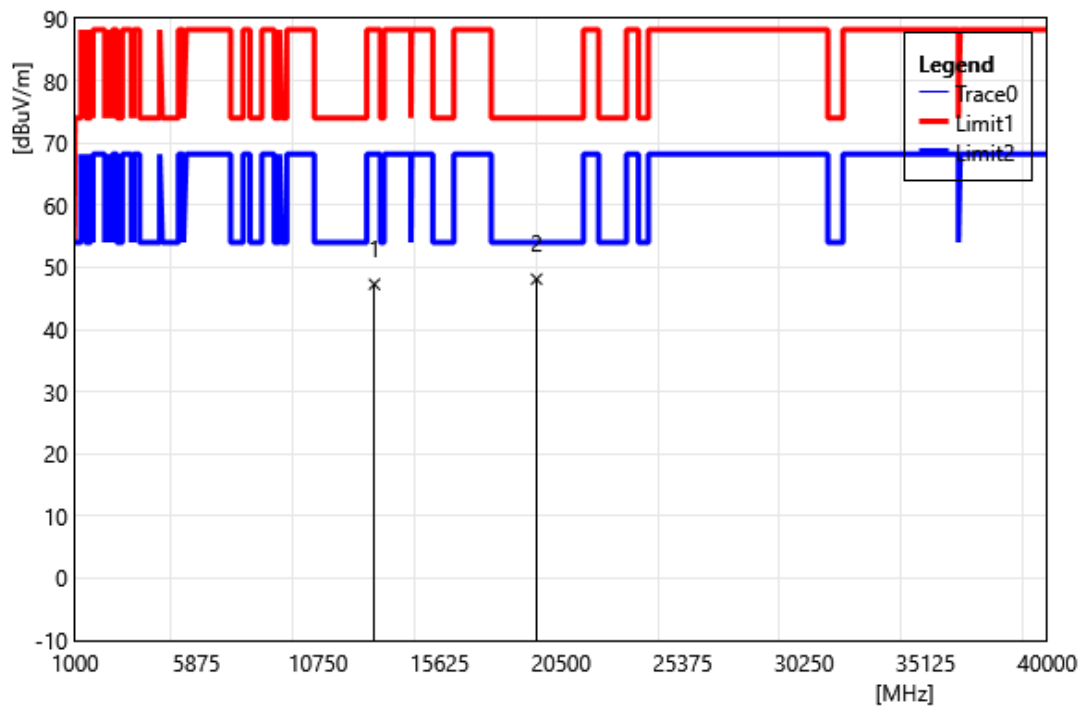


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13010.00	34.25	13.03	47.28	88.20	-40.92	PEAK
2	19515.00	32.31	15.80	48.11	74.00	-25.89	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE160 6665		
	MHz		
Polarization:	Vertical		
Remark:			

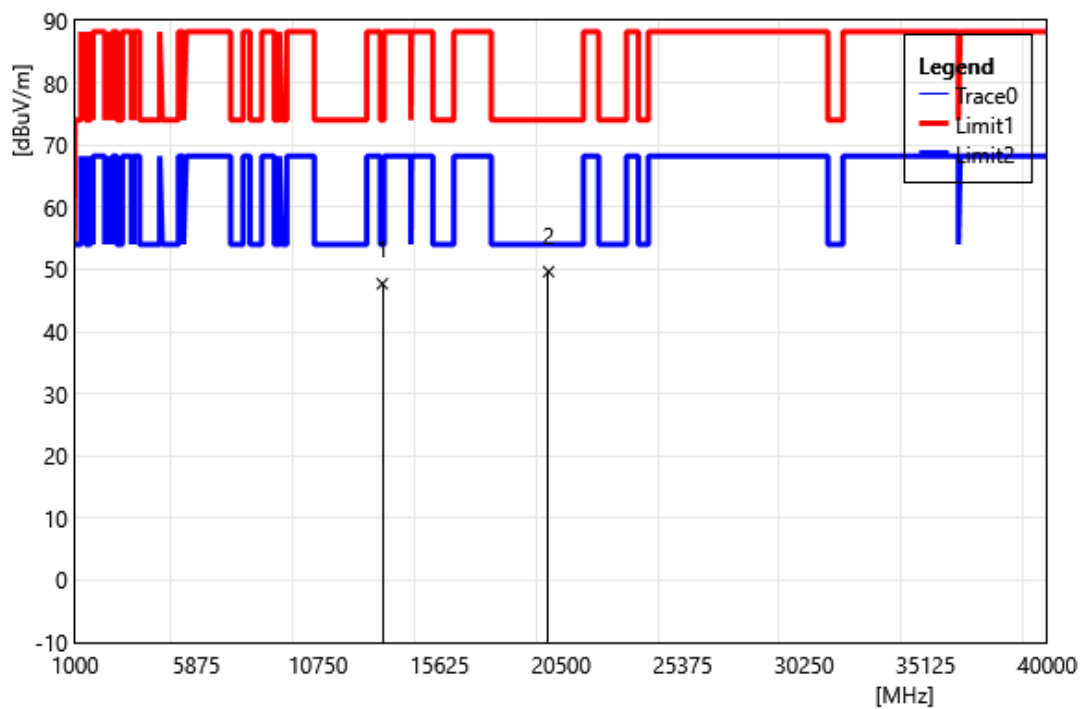


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13330.00	34.20	13.48	47.68	74.00	-26.32	PEAK
2	19995.00	33.10	16.53	49.63	74.00	-24.37	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE160 6665		
	MHz		
Polarization:	Horizontal		
Remark:			

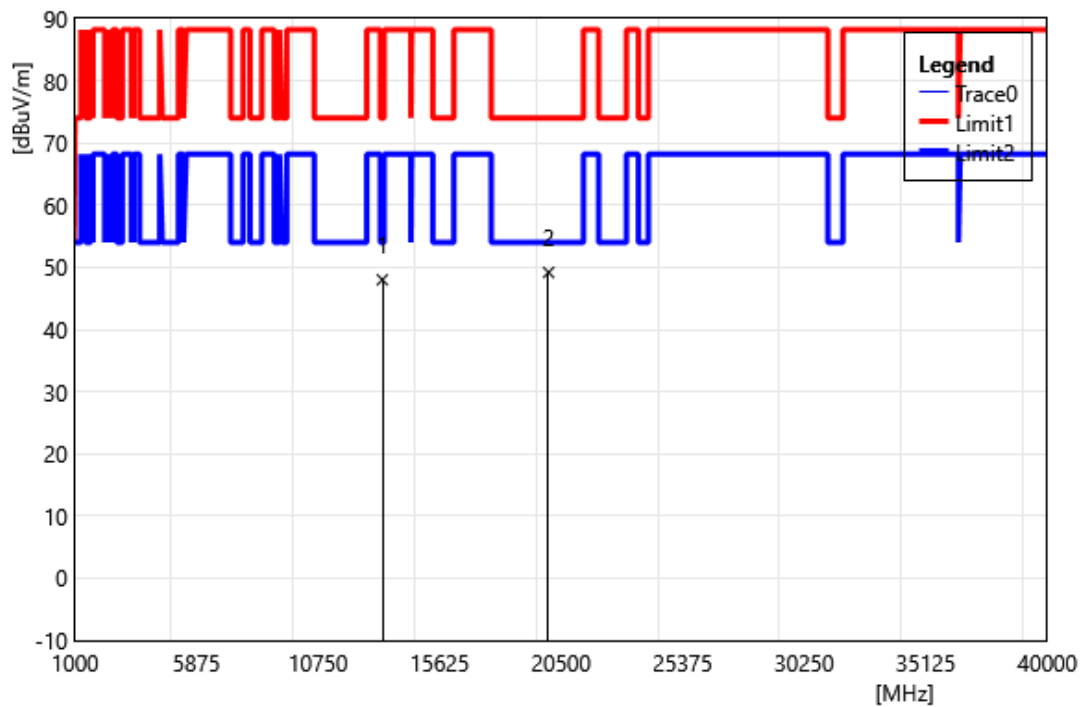


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13330.00	34.51	13.48	47.99	74.00	-26.01	PEAK
2	19995.00	32.65	16.53	49.18	74.00	-24.82	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE160 6825		
	MHz		
Polarization:	Vertical		
Remark:			

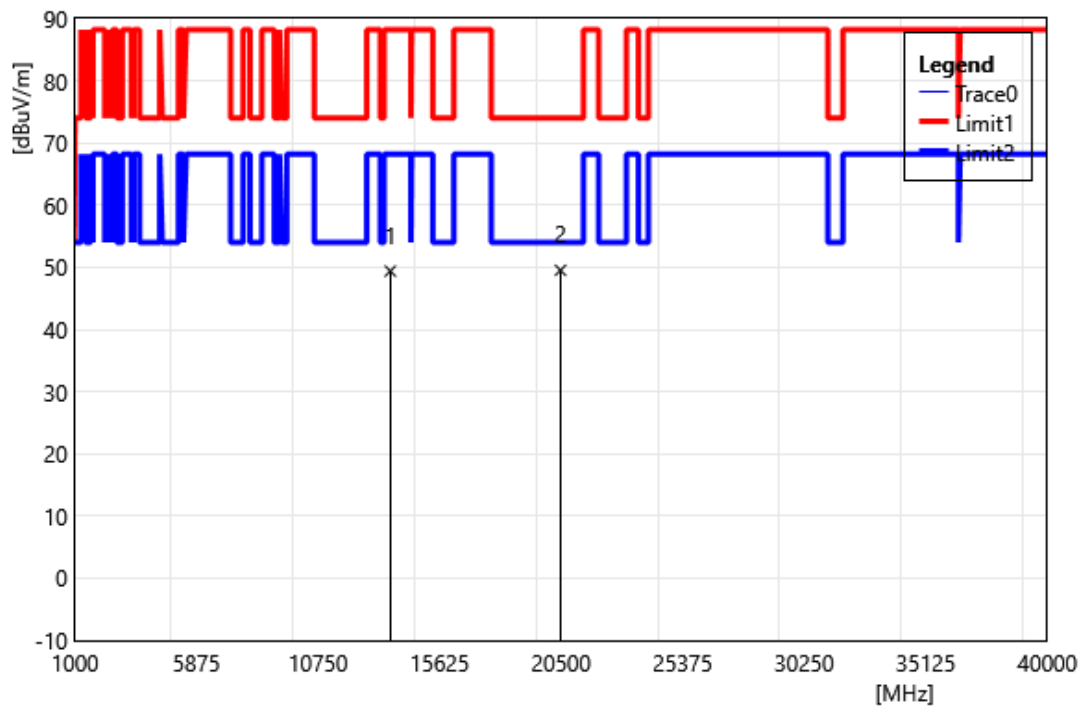


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13650.00	34.88	14.51	49.39	88.20	-38.81	PEAK
2	20475.00	32.77	16.76	49.53	74.00	-24.47	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE160 6825		
	MHz		
Polarization:	Horizontal		
Remark:			

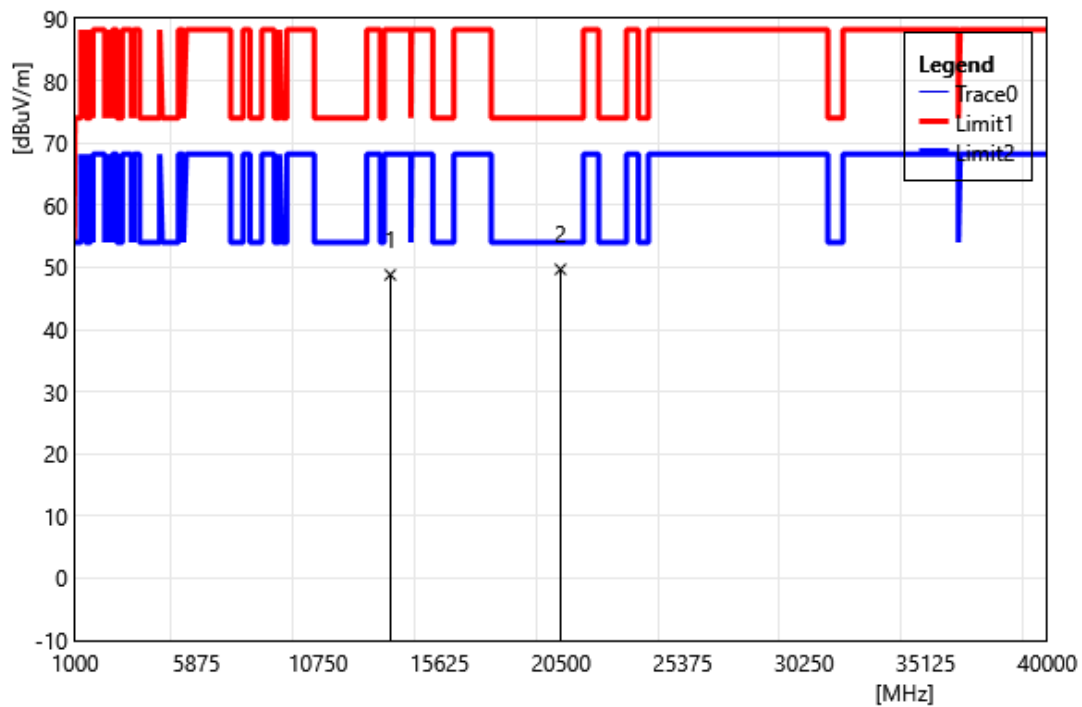


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13650.00	34.29	14.51	48.80	88.20	-39.40	PEAK
2	20475.00	32.93	16.76	49.69	74.00	-24.31	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE160 6985		
	MHz		
Polarization:	Vertical		
Remark:			

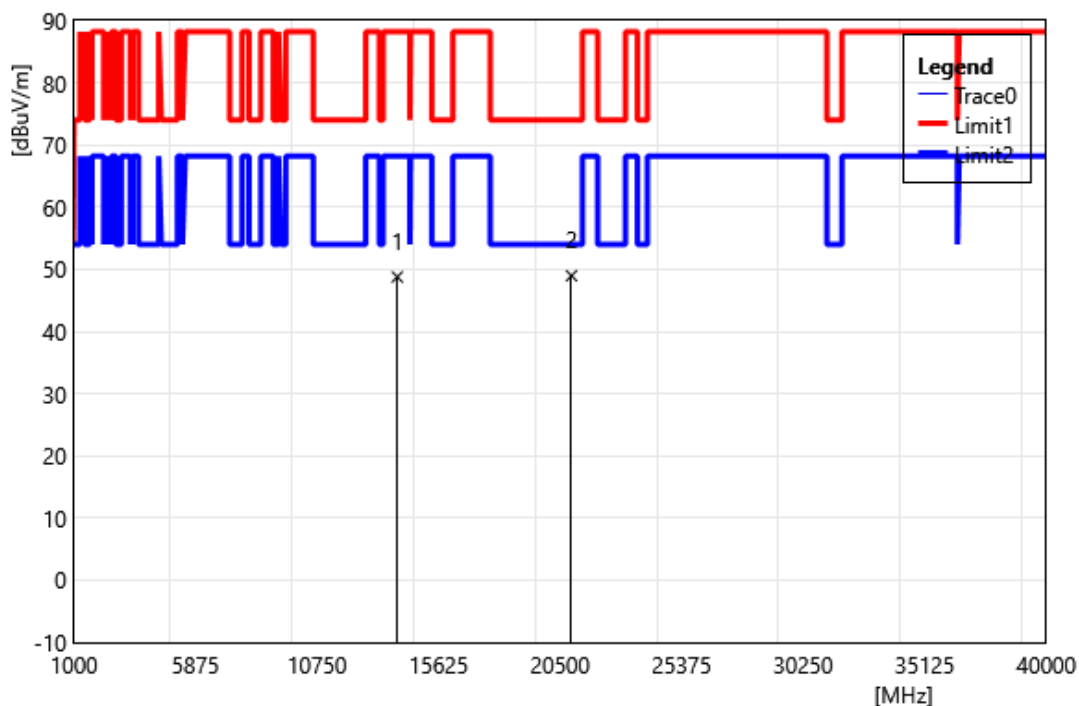

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13970.00	33.92	14.85	48.77	88.20	-39.43	PEAK
2	20955.00	31.89	17.08	48.97	74.00	-25.03	PEAK


Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE160 6985		
	MHz		
Polarization:	Horizontal		
Remark:			

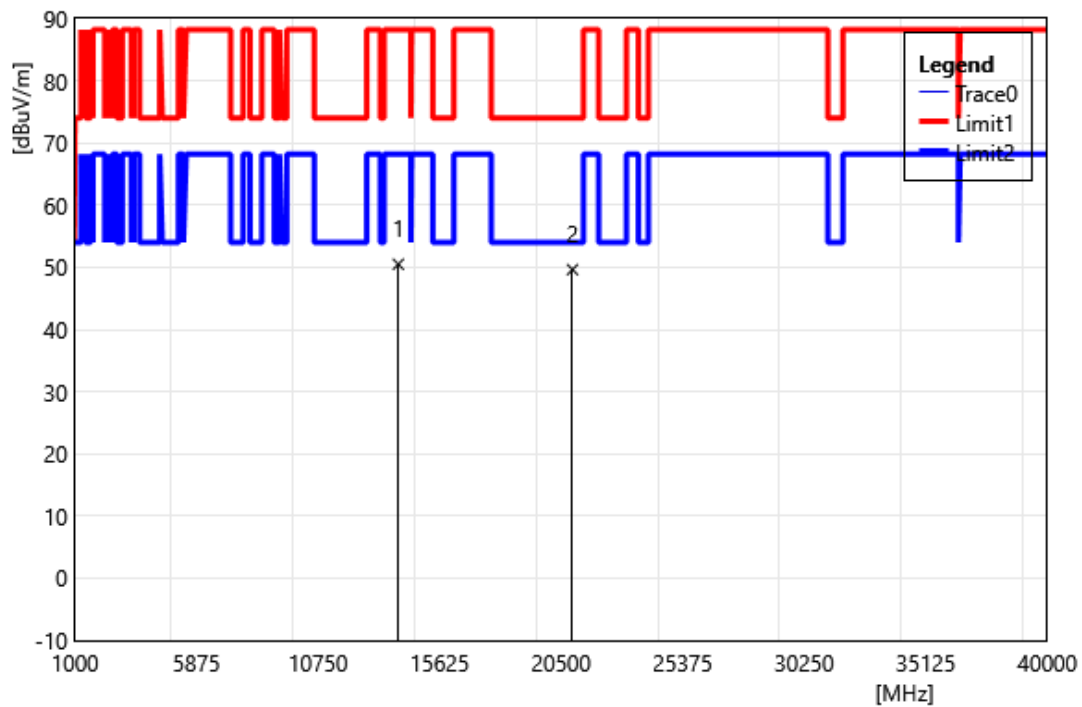

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13970.00	35.66	14.85	50.51	88.20	-37.69	PEAK
2	20955.00	32.55	17.08	49.63	74.00	-24.37	PEAK


Band Edge

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5955		
	MHz		
Polarization:	Vertical		
Remark:			

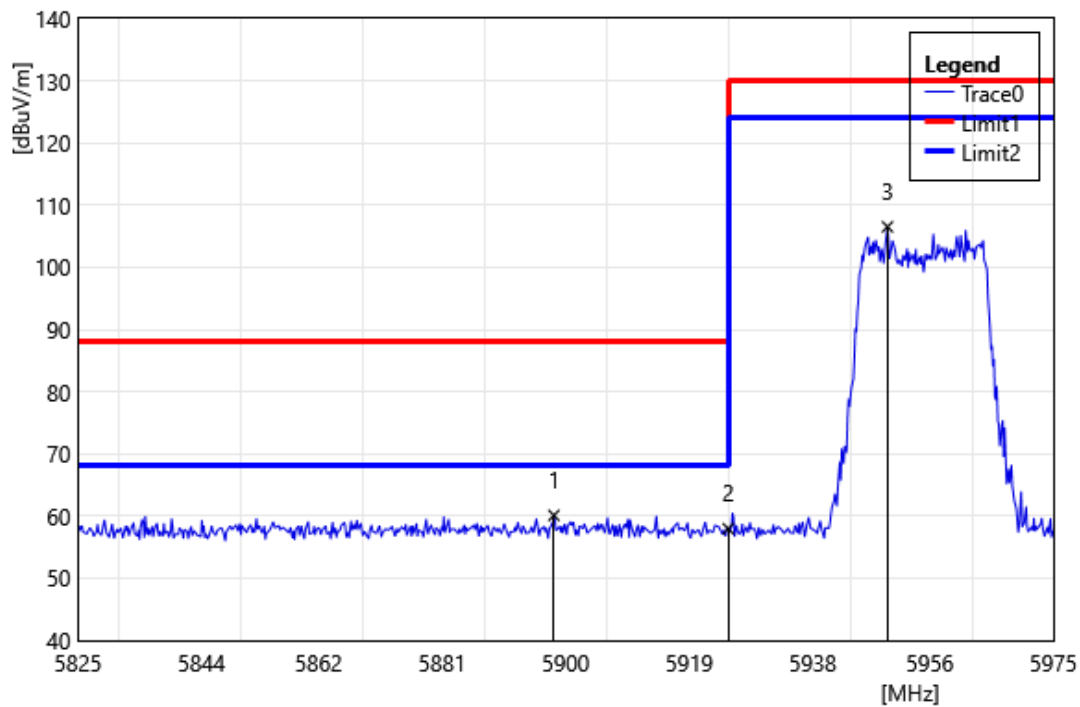


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5898.20	59.70	0.41	60.11	88.20	-28.09	PEAK
2	5925.00	57.69	0.28	57.97	88.20	-30.23	PEAK
3	5949.50	106.38	0.14	106.52	130.00	-23.48	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 5955		
	MHz		
Polarization:	Horizontal		
Remark:			

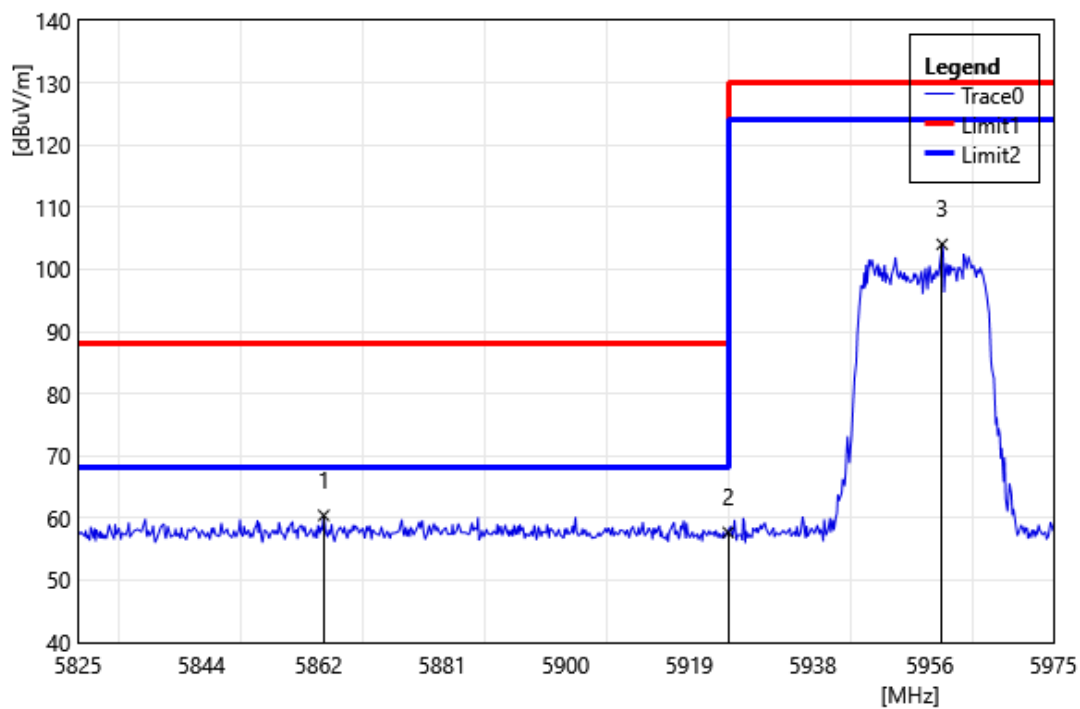

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5862.80	60.12	0.31	60.43	88.20	-27.77	PEAK
2	5925.00	57.40	0.28	57.68	88.20	-30.52	PEAK
3	5957.90	103.86	0.16	104.02	130.00	-25.98	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ax HE20 7095		
	MHz		
Polarization:	Vertical		
Remark:			

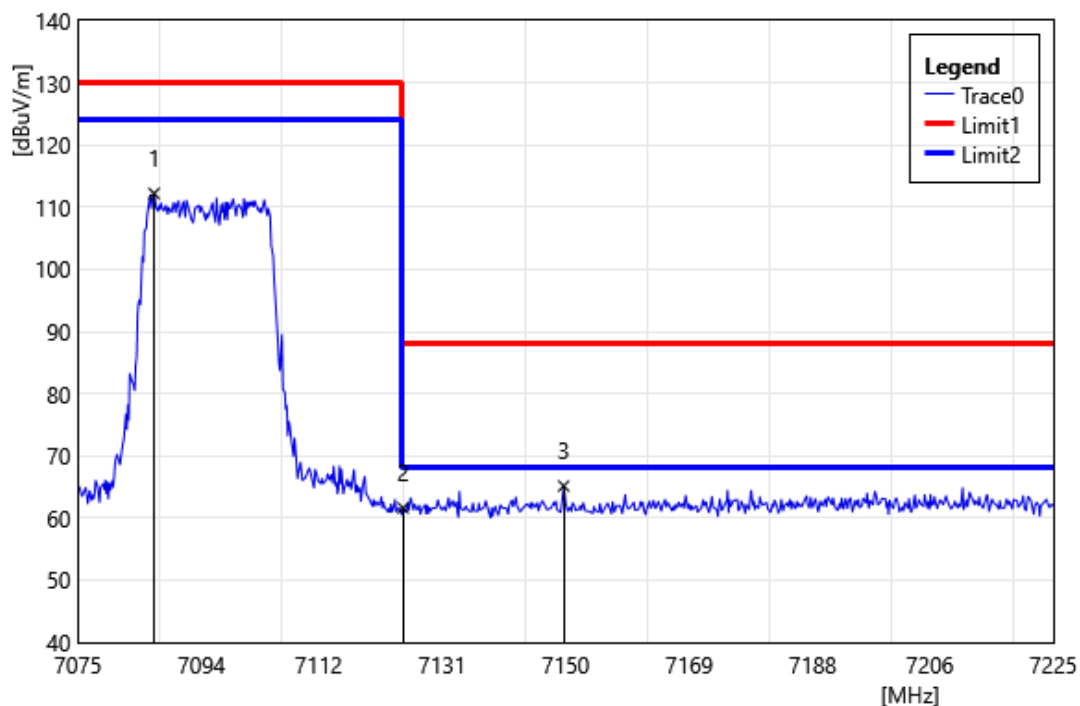

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7086.70	107.38	4.81	112.19	130.00	-17.81	PEAK
2	7125.00	56.63	4.99	61.62	88.20	-26.58	PEAK
3	7149.70	60.11	5.05	65.16	88.20	-23.04	PEAK