



**FCC OET BULLETIN 65 SUPPLEMENT C
IC RSS-102 ISSUE 2**

SAR EVALUATION REPORT

FOR

INTEL WI-FI LINK 5300 SERIES

FCC MODEL: 533AN_MMW

IC MODEL: 533ANMU

FCC ID: PD9533ANMU

IC: 1000M-533ANMU

REPORT NUMBER: 09U12471-1

ISSUE DATE: April 9, 2009

Prepared for

INTEL CORPORATION

2111 N.E. 25TH AVENUE

HILLSBORO, OR 97124, USA

Prepared by

COMPLIANCE CERTIFICATION SERVICES

47173 BENICIA STREET

FREMONT, CA 94538, U.S.A.

TEL: (510) 771-1000

FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	April 9, 2009	Initial Issue	--

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	5
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	5
4.2. <i>MEASUREMENT UNCERTAINTY</i>	6
5. EQUIPMENT UNDER TEST	8
6. SYSTEM SPECIFICATIONS	9
7. COMPOSITION OF INGREDIENTS FOR TISSUE SIMULATING LIQUIDS	10
8. LIQUID PARAMETERS CHECK	11
8.1. <i>LIQUID CHECK RESULTS FOR M2450</i>	12
8.2. <i>LIQUID CHECK RESULTS FOR M5800</i>	13
9. SYSTEM PERFORMANCE	14
9.1. <i>SYSTEM PERFORMANCE CHECK RESULTS</i>	15
10. OUTPUT POWER VERIFICATION	16
11. SUMMARY OF TEST RESULTS	17
11.1. <i>SAR TEST RESULT FOR THE 2.4 GHZ BAND</i>	17
11.1.1. <i>LAPHELD POSITION</i>	17
11.2. <i>SAR TEST RESULT FOR THE 5 GHZ BANDS</i>	17
11.2.1. <i>LAPHELD POSITION</i>	17
12. SAR TEST PLOTS	18
13. ATTACHMENTS	23
14. TEST SETUP PHOTO	24

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: INTEL CORPORATION
 2111 N.E. 25TH AVENUE
 HILLSBORO, OR 97124, USA

EUT DESCRIPTION: Intel Wi-Fi Link 5300 Series

MODEL NUMBER: FCC: 533AN_MMW; IC: 533ANMU

DEVICE CATEGORY: Portable

EXPOSURE CATEGORY: General Population/Uncontrolled Exposure

DATE TESTED: April 7 - 9, 2009

MAX SAR VALUE:

FCC / IC Rule Parts	Frequency Range [MHz]	The Highest SAR Values (1g_mW/g)	Limit (mW/g)
15.247 / RSS-102	2400 – 2483.5	0.027	1.6
	5725 – 5850	0.326	
15.407 / RSS-102	5150 – 5250	0.202	
	5250 – 5350	0.203	
	5470 – 5725	0.371	


APPLICABLE STANDARDS:

STANDARD	TEST RESULTS
FCC OET BULLETIN 65 SUPPLEMENT C	Pass
RSS-102 ISSUE 2	Pass

Compliance Certification Services, Inc. (CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by CCS will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:



SUNNY SHIH
 ENGINEERING SUPERVISOR
 COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC OET Bulletin 65 Supplement C, Specific FCC Procedure KDB 248227 SAR Measurement Procedure for 820.11abg Transmitters, KDB 447498_RF Exposure Requirements and Procedures for mobile and portable devices and IC RSS 102 Issue 2.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/Standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

Name of Equipment	Manufacturer	Type/Model	Serial Number	Cal. Due date		
				MM	DD	Year
Robot - Six Axes	Stäubli	RX90BL	N/A			N/A
Robot Remote Control	Stäubli	CS7MB	3403-91535			N/A
DASY4 Measurement Server	SPEAG	SEUMS001BA	1041			N/A
Probe Alignment Unit	SPEAG	LB (V2)	261			N/A
SAM Phantom (SAM1)	SPEAG	QD000P40CA	1185			N/A
SAM Phantom (SAM2)	SPEAG	QD000P40CA	1050			N/A
Oval Flat Phantom (ELI 4.0)	SPEAG	QD OVA001 B	1003			N/A
Electronic Probe kit	HP	85070C	N/A			N/A
S-Parameter Network Analyzer	Agilent	8753ES-6	MY40001647	11	20	2010
E-Field Probe	SPEAG	EX3DV3	3531	4	23	2009
Thermometer	ERTCO	639-1S	1718	5	28	2009
Data Acquisition Electronics	SPEAG	DAE3 V1	427	10	20	2009
System Validation Dipole	SPEAG	D2450V2	748	4	14	2009
System Validation Dipole	SPEAG	D5GHzV2	1003	11	21	2009
Signal Generator	R&S	SMP 04	DE34210	2	16	2009
Power Meter	Giga-tronics	8651A	8651404	1	11	2010
Power Sensor	Giga-tronics	80701A	1834588	1	11	2010
Amplifier	Mini-Circuits	ZVE-8G	90606			N/A
Amplifier	Mini-Circuits	ZHL-42W	D072701-5			N/A
Simulating Liquid	CCS	M2450	N/A	Within 24 hrs of first test		
Simulating Liquid	SPEAG	M5200-5800	N/A	Within 24 hrs of first test		

4.2. MEASUREMENT UNCERTAINTY

Measurement uncertainty for 300 MHz – 3000 MHz

Uncertainty component	Tol. (±%)	Probe Dist.	Div.	Ci (1g)	Ci (10g)	Std. Unc.(±%)		
						Ui (1g)	Ui(10g)	
Measurement System								
Probe Calibration	4.80	N	1	1	1	4.80	4.80	
Axial Isotropy	4.70	R	1.732	0.707	0.707	1.92	1.92	
Hemispherical Isotropy	9.60	R	1.732	0.707	0.707	3.92	3.92	
Boundary Effects	1.00	R	1.732	1	1	0.58	0.58	
Linearity	4.70	R	1.732	1	1	2.71	2.71	
System Detection Limits	1.00	R	1.732	1	1	0.58	0.58	
Readout Electronics	1.00	N	1	1	1	1.00	1.00	
Response Time	0.80	R	1.732	1	1	0.46	0.46	
Integration Time	2.60	R	1.732	1	1	1.50	1.50	
RF Ambient Conditions - Noise	1.59	R	1.732	1	1	0.92	0.92	
RF Ambient Conditions - Reflections	0.00	R	1.732	1	1	0.00	0.00	
Probe Positioner Mechanical Tolerance	0.40	R	1.732	1	1	0.23	0.23	
Probe Positioning With Respect to Phantom Shell	2.90	R	1.732	1	1	1.67	1.67	
algorithms for max. SAR evaluation	3.90	R	1.732	1	1	2.25	2.25	
Test sample Related								
Test Sample Positioning	1.10	N	1	1	1	1.10	1.10	
Device Holder Uncertainty	3.60	N	1	1	1	3.60	3.60	
Power and SAR Drift Measurement	5.00	R	1.732	1	1	2.89	2.89	
Phantom and Tissue Parameters								
Phantom Uncertainty	4.00	R	1.732	1	1	2.31	2.31	
Liquid Conductivity - Target	5.00	R	1.732	0.64	0.43	1.85	1.24	
Liquid Conductivity - Meas.	8.60	N	1	0.64	0.43	5.50	3.70	
Liquid Permittivity - Target	5.00	R	1.732	0.6	0.49	1.73	1.41	
Liquid Permittivity - Meas.	3.30	N	1	0.6	0.49	1.98	1.62	
Combined Standard Uncertainty								
						RSS	11.44	10.49
Expanded Uncertainty (95% Confidence Interval)								
						K=2	22.87	20.98
Notes for table								
1. Tol. - tolerance in influence quantity								
2. N - Nomal								
3. R - Rectangular								
4. Div. - Divisor used to obtain standard uncertainty								
5. Ci - is te sensitivity coefficient								

Measurement uncertainty for 3 GHz – 6 GHz

Uncertainty component	Tol. (±%)	Probe Dist.	Div.	Ci (1g)	Ci (10g)	Std. Unc.(±%)	
						Ui (1g)	Ui(10g)
Measurement System							
Probe Calibration	4.80	N	1	1	1	4.80	4.80
Axial Isotropy	4.70	R	1.732	0.707	0.707	1.92	1.92
Hemispherical Isotropy	9.60	R	1.732	0.707	0.707	3.92	3.92
Boundary Effects	1.00	R	1.732	1	1	0.58	0.58
Linearity	4.70	R	1.732	1	1	2.71	2.71
System Detection Limits	1.00	R	1.732	1	1	0.58	0.58
Readout Electronics	1.00	N	1	1	1	1.00	1.00
Response Time	0.80	R	1.732	1	1	0.46	0.46
Integration Time	2.60	R	1.732	1	1	1.50	1.50
RF Ambient Conditions - Noise	3.00	R	1.732	1	1	1.73	1.73
RF Ambient Conditions - Reflections	3.00	R	1.732	1	1	1.73	1.73
Probe Positioner Mechanical Tolerance	0.40	R	1.732	1	1	0.23	0.23
Probe Positioning With Respect to Phantom Shell	2.90	R	1.732	1	1	1.67	1.67
Extrapolation, interpolation, and integration algorithms for max. SAR evaluation	3.90	R	1.732	1	1	2.25	2.25
Test sample Related							
Test Sample Positioning	1.10	N	1	1	1	1.10	1.10
Device Holder Uncertainty	3.60	N	1	1	1	3.60	3.60
Power and SAR Drift Measurement	5.00	R	1.732	1	1	2.89	2.89
Phantom and Tissue Parameters							
Phantom Uncertainty	4.00	R	1.732	1	1	2.31	2.31
Liquid Conductivity - Target	5.00	R	1.732	0.64	0.43	1.85	1.24
Liquid Conductivity - Meas.	8.60	N	1	0.64	0.43	5.50	3.70
Liquid Permittivity - Target	5.00	R	1.732	0.6	0.49	1.73	1.41
Liquid Permittivity - Meas.	3.30	N	1	0.6	0.49	1.98	1.62
Combined Standard Uncertainty	RSS					11.66	10.73
Expanded Uncertainty (95% Confidence Interval)	K=2					23.32	21.46
Notes for table							
1. Tol. - tolerance in influence quantity							
2. N - Nomal							
3. R - Rectangular							
4. Div. - Divisor used to obtain standard uncertainty							
5. Ci - is te sensitivity coefficient							

5. EQUIPMENT UNDER TEST

Intel Wi-Fi Link 5100 Series (Tested inside of LENOVO ideapad Y550)

Normal operation: Laptop Mode


Note: SAR test with display open at 90° to the keyboard

Antenna tested: Manufactured Model Number Antenna ID

WNC 81.EJS15.008 TX3

Power supply: Power supplied through laptop computer (host device)

6. SYSTEM SPECIFICATIONS

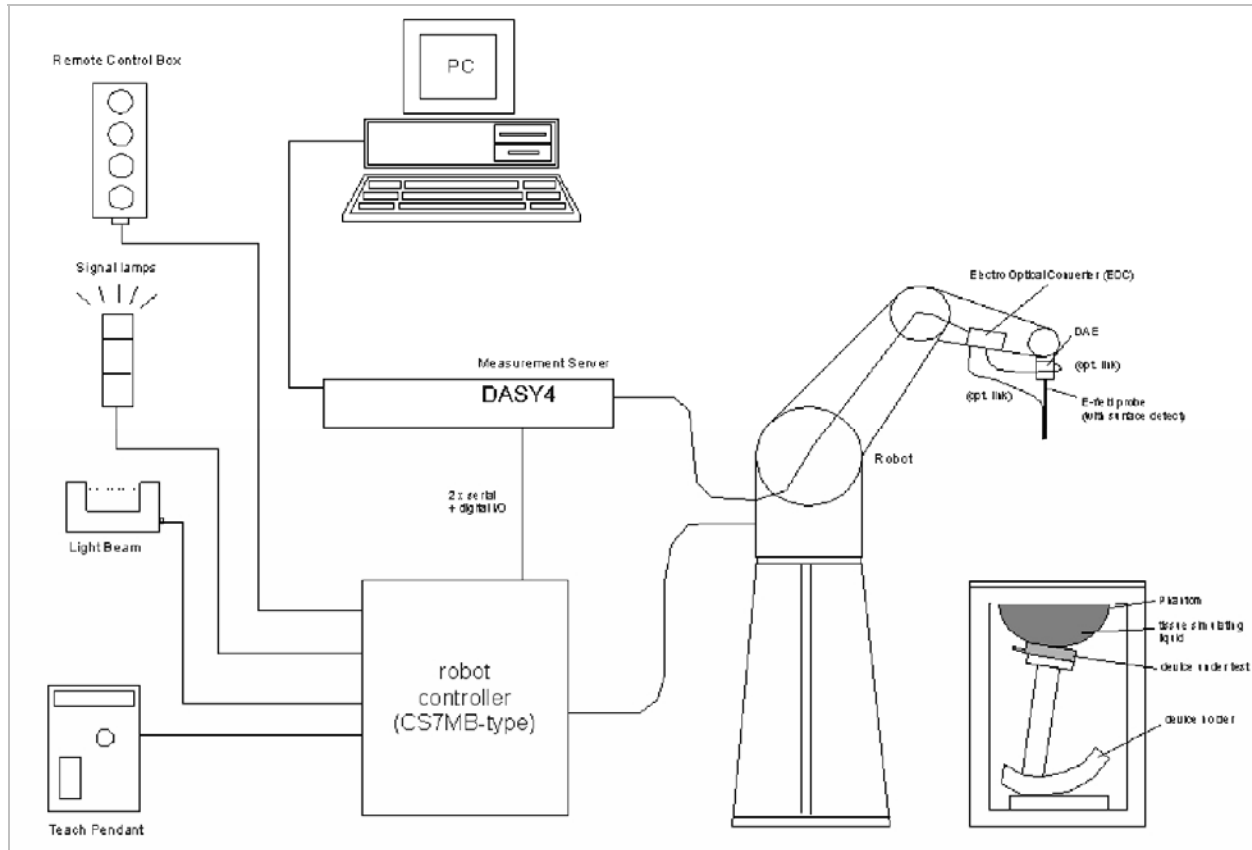

The DASY4 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 2000 or Windows XP.
- DASY4 software.
- Remote controls with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing to validate the proper functioning of the system.

7. COMPOSITION OF INGREDIENTS FOR TISSUE SIMULATING LIQUIDS

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (S/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

Salt: 99+% Pure Sodium Chloride

Sugar: 98+% Pure Sucrose

Water: De-ionized, 16 MΩ+ resistivity

HEC: Hydroxyethyl Cellulose

DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100 (ultra pure): Polyethylene glycol mono [4-(1,1, 3, 3-tetramethylbutyl)phenyl]ether

8. LIQUID PARAMETERS CHECK

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The relative permittivity and conductivity of the tissue material should be within $\pm 5\%$ of the values given in the table below.

Reference Values of Tissue Dielectric Parameters for Head and Body Phantom (for 150 – 3000 MHz and 5800 MHz)

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in IEEE Standard 1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations and extrapolated according to the head parameters specified in IEEE Standard 1528.

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.8
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.9	55.2	0.97
900	41.5	0.97	55	1.05
915	41.5	0.98	55	1.06
1450	40.5	1.2	54	1.3
1610	40.3	1.29	53.8	1.4
1800 – 2000	40	1.4	53.3	1.52
2450	39.2	1.8	52.7	1.95
3000	38.5	2.4	52	2.73
5800	35.3	5.27	48.2	6

(ϵ_r = relative permittivity, σ = conductivity and $\rho = 1000 \text{ kg/m}^3$)

8.1. LIQUID CHECK RESULTS FOR M2450

Simulating Liquid Dielectric Parameters for Muscle 2450 MHz

Room Ambient Temperature = 24°C; Relative humidity = 40%

Measured by: Sunny Shih

f (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit (%)
2450	e'	52.19	Relative Permittivity (ϵ_r):	52.191	52.7	-0.97	± 5
	e''	14.30	Conductivity (σ):	1.949	1.95	-0.06	± 5

Liquid Temperature: 23 deg. C

April 07, 2009 03:00 PM

Frequency	e'	e''
2400000000.	52.3817	14.0274
2405000000.	52.3471	14.0507
2410000000.	52.3237	14.0676
2415000000.	52.2948	14.1066
2420000000.	52.2643	14.1292
2425000000.	52.2503	14.1762
2430000000.	52.2246	14.1930
2435000000.	52.2121	14.2198
2440000000.	52.1937	14.2504
2445000000.	52.1792	14.2838
2450000000.	52.1909	14.2989
2455000000.	52.1837	14.3195
2460000000.	52.1846	14.3373
2465000000.	52.1911	14.3708
2470000000.	52.1945	14.3781
2475000000.	52.1969	14.4019
2480000000.	52.1986	14.4306
2485000000.	52.1952	14.4317
2490000000.	52.1808	14.4475
2495000000.	52.1660	14.4714
2500000000.	52.1562	14.4929

The conductivity (σ) can be given as:

$$\sigma = \omega \epsilon_0 e'' = 2 \pi f \epsilon_0 e''$$

where $f = \text{target } f * 10^6$

$$\epsilon_0 = 8.854 * 10^{-12}$$

8.2. LIQUID CHECK RESULTS FOR M5800

Simulating Liquid Dielectric Parameters for Muscle 5800 MHz

Room Ambient Temperature = 25°C; Relative humidity = 40%

Measured by: Sunny Shih

f (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit (%)	
5200	e'	48.7808	Relative Permittivity (ϵ_r):	48.7808	49.0	-0.45	± 10
	e''	18.8094	Conductivity (σ):	5.44123	5.30	2.66	± 5
5500	e'	48.6533	Relative Permittivity (ϵ_r):	48.6533	48.6	0.11	± 10
	e''	19.1560	Conductivity (σ):	5.86120	5.65	3.74	± 5
5800	e'	47.5347	Relative Permittivity (ϵ_r):	47.5347	48.2	-1.38	± 10
	e''	19.4951	Conductivity (σ):	6.29032	6.00	4.84	± 5

Liquid temperature: 24 deg. C
 April 08, 2009 05:56 PM

Frequency	e'	e''
4600000000.	50.1072	17.8402
4650000000.	50.2278	18.1388
4700000000.	50.0374	17.9296
4750000000.	49.7871	18.2438
4800000000.	50.0518	18.1940
4850000000.	49.5461	18.1808
4900000000.	49.7253	18.5342
4950000000.	49.3425	18.2502
5000000000.	49.2446	18.6529
5050000000.	49.2653	18.5210
5100000000.	48.8368	18.7133
5150000000.	49.1486	18.8408
5200000000.	48.7808	18.8094
5250000000.	48.9772	19.0570
5300000000.	48.8554	18.9672
5350000000.	48.7332	19.1854
5400000000.	48.8715	19.0576
5450000000.	48.4075	19.1678
5500000000.	48.6533	19.1560
5550000000.	48.3176	19.2269
5600000000.	48.2539	19.3175
5650000000.	48.0230	19.3219
5700000000.	48.0303	19.4920
5750000000.	48.0663	19.4734
5800000000.	47.5347	19.4951
5850000000.	47.7427	19.7438
5900000000.	47.5141	19.4772
5950000000.	47.0387	19.6903
6000000000.	47.5819	20.0199

The conductivity (σ) can be given as:

$$\sigma = \omega \epsilon_0 e'' = 2 \pi f \epsilon_0 e''$$

where $f = \text{target } f * 10^6$

$$\epsilon_0 = 8.854 * 10^{-12}$$

9. SYSTEM PERFORMANCE

The system performance check is performed prior to any usage of the system in order to guarantee reproducible results. The system performance check verifies that the system operates within its specifications of $\pm 10\%$.

System Performance Check Measurement Conditions

- The measurements were performed in the flat section of the SAM twin phantom filled with Body simulating liquid of the following parameters.
- The DASY4 system with an Isotropic E-Field Probe EX3DV3-SN: 3531 was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
 For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 fine cube was chosen for cube
- Distance between probe sensors and phantom surface was set to 3 mm.
 For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 250 mW $\pm 3\%$.
- The results are normalized to 1 W input power.

450 to 2450 MHz Reference SAR Values for Body-tissue (From SPEAG)

Dipole Type	Distance	Frequency	SAR (1g)	SAR (10g)	SAR (peak)
	(mm)	(MHz)	[W/kg]	[W/kg]	[W/kg]
D835V2	15	835	9.71	6.38	14.1
D900V2	15	900	11.1	7.17	16.3
D1450V2	10	1450	29.6	16.6	49.8
D1800V2	10	1800	38.5	20.3	67.5
D1900V2	10	1900	39.8	20.8	69.6
D2000V2	10	2000	40.9	21.2	71.5
D2450V2	10	2450	51.2	23.7	97.6

Note: All SAR values normalized to 1 W forward power.

Reference SAR Values for HEAD & BODY-tissue from calibration certificate of SPEAG. Certificate no: D5GHzV2-1003_Nov07

f (MHz)	Head Tissue		Body Tissue	
	SAR _{1g}	SAR _{10g}	SAR _{1g}	SAR _{10g}
5200	78.6	22.1	74.7	21.1
5500	80.4	22.7	80.1	22.5
5800	79.9	22.4	70.8	19.8

Note: All SAR values normalized to 1 W forward power.

9.1. SYSTEM PERFORMANCE CHECK RESULTS

System Validation Dipole: D2450V2 SN: 748

Date: April 7, 2009

Ambient Temperature = 24°C; Relative humidity = 40%

Measured by: Sunny Shih

Medium	CW Signal (MHz)	Forward power (mW)	Measured (Normalized to 1 W)		Target	Delta (%)	Tolerance (%)
Body	2450	250	1g SAR:	47.2	51.2	-7.81	±10
			10g SAR:	22.0	23.7	-7.17	

System Validation Dipole: D5GHzV2 SN 1003

Date: April 8, 2009

Ambient Temperature = 25°C; Relative humidity = 40%

Measured by: Sunny Shih

Medium	CW Signal (MHz)	Forward power (mW)	Measured (Normalized to 1 W)		Target	Delta (%)	Tolerance (%)
Muscle	5200	250	1g SAR:	73.3	74.7	-1.87	±10
			10g SAR:	21.0	21.1	-0.47	
Muscle	5500	250	1g SAR:	74.0	80.1	-7.62	±10
			10g SAR:	20.8	22.5	-7.56	
Muscle	5800	250	1g SAR:	69.1	70.8	-2.40	±10
			10g SAR:	19.5	19.8	-1.41	

10. OUTPUT POWER VERIFICATION

The following procedures had been used to prepare the EUT for the SAR test.

The following procedures have been used to prepare the EUT for the SAR test.

The client provided a special driver and program, CRTU v5.0.62.0, which enables a user to control the frequency and output power of the module.

The modes with highest output power channel were chosen for the conducted output power measurement.

Results:

802.11gn mode (2.4 GHz band)

Mode	Channel	f (MHz)	Antenna			Duty cycle (%)	Gain power setting
			A (TX1)	B (TX2)	C (TX3)		
802.11b	6	2437			16.78	100	22
802.11n 40 MHz	6	2437	16.55		16.81	97	26 / 26

Note: A, B and C denote TX1, TX2 and TX3 Antenna

802.11an mode (5 GHz band)

Mode	Channel	f (MHz)	Antenna			Duty cycle (%)	Gain power setting
			A (TX1)	B (TX2)	C (TX3)		
5.2 GHz Band							
802.11a	40	5200			16.6	99	27
802.11n 20 MHz	40	5200	16.7		16.7	98	29 / 29
5.3 GHz Band							
802.11a	56	5280			16.7	99	26
802.11n 20 MHz	56	5280	16.7		16.7	98	26.5 / 26.5
5.5 GHz Band							
802.11a	120	5600			16.8	99	24
802.11n 20 MHz	120	5600	16.7		16.7	98	25 / 25
5.8 GHz Band							
802.11a	157	5785			16.8	99	25.5
802.11n 40 MHz	159	5795	16.7		16.7	97	26 / 26

11. SUMMARY OF TEST RESULTS

If the SAR measured at the middle channel for each test configuration is at least 3.0 dB (0.8 mW/g) lower than the SAR limit (1.6 mW/g), testing at the high and low channels is optional for such test configuration(s).

The modes with highest output power channel were chosen for the testing.

11.1. SAR TEST RESULT FOR THE 2.4 GHZ BAND

11.1.1. LAPHELD POSITION

Mode	Channel	f (MHz)	Antenna	Measured SAR 1g (mW/g)	Limit (mW/g)
802.11b	6	2437	TX3	0.027	1.6
802.11n 40 MHz	6	2437	TX1+TX3	0.026	

11.2. SAR TEST RESULT FOR THE 5 GHZ BANDS

11.2.1. LAPHELD POSITION

Band	Mode	Channel	f (MHz)	Antenna	Measured SAR 1g (mW/g)	Limit (mW/g)
5.2 GHz	802.11a	40	5200	TX3	0.190	1.6
	802.11n 20 MHz	40	5200	TX1+TX3	0.202	
5.3 GHz	802.11a	56	5280	TX3	0.203	1.6
	802.11n 20 MHz	56	5280	TX1+TX3	0.143	
5.5 GHz	802.11a	120	5600	TX3	0.371	1.6
	802.11n 20 MHz	120	5600	TX1+TX3	0.273	
5.8 GHz	802.11a	157	5785	TX3	0.326	1.6
	802.11n 40 MHz	159	5795	TX1+TX3	0.275	

12. SAR TEST PLOTS

Worst-case SAR Plots for 2.4 GHz band

Date/Time: 4/7/2009 4:02:37 PM

Test Laboratory: Compliance Certification Services

2.4 GHz Band

DUT: Lenovo; Type: Y550; Serial: n/a

Communication System: 802.11bg; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.93$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(7.91, 7.91, 7.91); Calibrated: 4/23/2008
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: SAM 2 (Twin); Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

802.11b M-ch C (TX3) Ant/Area Scan (9x12x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.031 mW/g

802.11b M-ch C (TX3) Ant/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm


Reference Value = 1.91 V/m; Power Drift = 0.419 dB

Peak SAR (extrapolated) = 0.046 W/kg

SAR(1 g) = 0.027 mW/g; SAR(10 g) = 0.015 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.034 mW/g

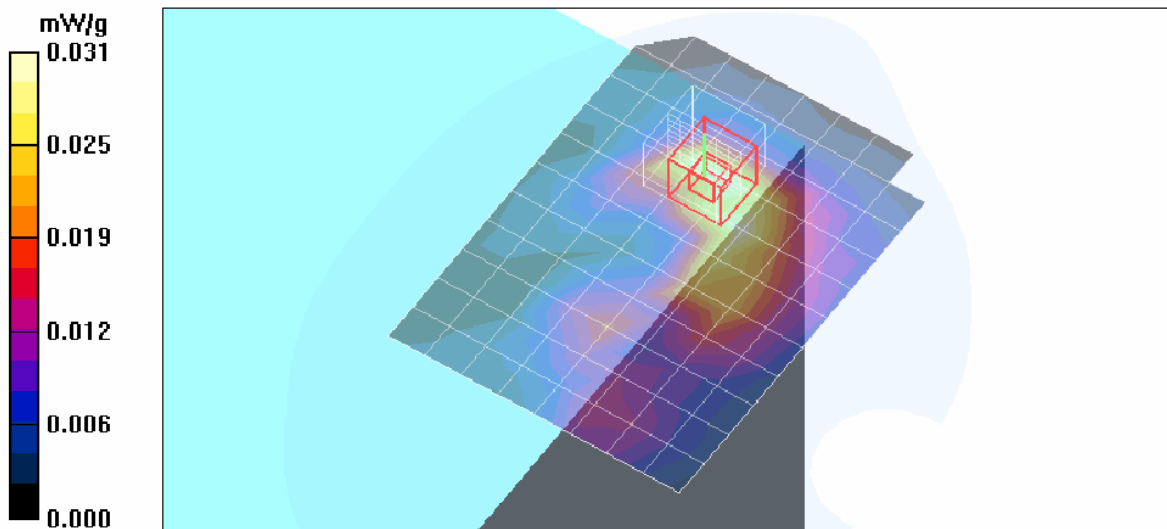

Worst-case SAR Plots for 5.2 GHz Band

Date/Time: 4/8/2009 10:03:56 PM

Test Laboratory: Compliance Certification Services

5.2 GHz Band

DUT: Lenovo; Type: Y550; Serial: n/a

Communication System: 802.11abgn; Frequency: 5200 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5200$ MHz; $\sigma = 5.44$ mho/m; $\epsilon_r = 48.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(4.21, 4.21, 4.21); Calibrated: 4/23/2008
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

802.11n 20 MHz, CH 40/Area Scan (12x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.297 mW/g


802.11n 20 MHz, CH 40/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 7.88 V/m; Power Drift = -0.860 dB

Peak SAR (extrapolated) = 0.612 W/kg

SAR(1 g) = 0.202 mW/g; SAR(10 g) = 0.080 mW/g

Maximum value of SAR (measured) = 0.316 mW/g

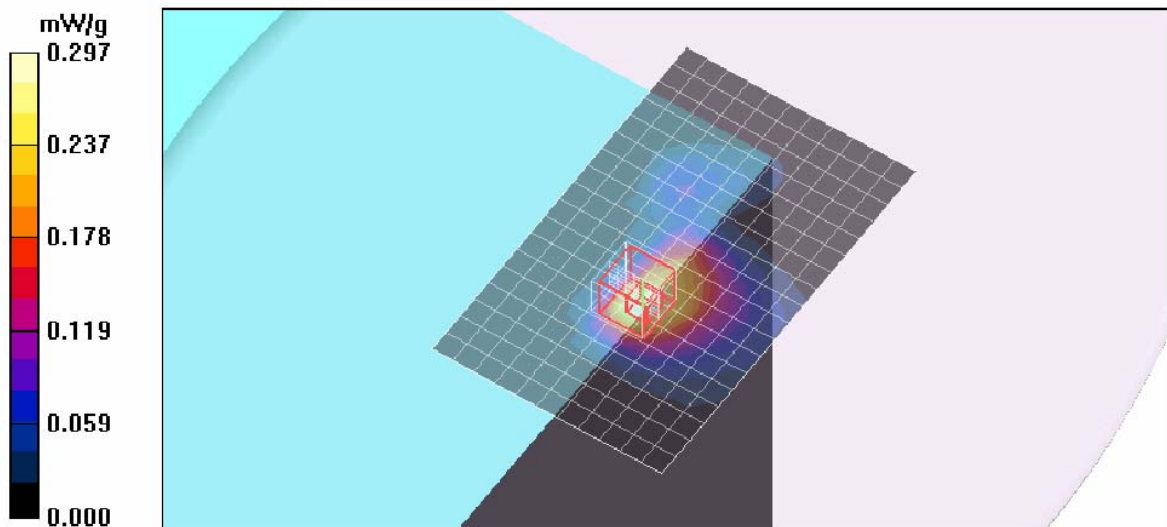

Worst-case SAR Plots for 5.3 GHz Band

Date/Time: 4/8/2009 10:51:03 PM

Test Laboratory: Compliance Certification Services

5.3 GHz Band

DUT: Lenovo; Type: Y550; Serial: n/a

Communication System: 802.11abgn; Frequency: 5280 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 5280$ MHz; $\sigma = 5.58$ mho/m; $\epsilon_r = 48.9$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(3.92, 3.92, 3.92); Calibrated: 4/23/2008
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

802.11a /Area Scan (10x17x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.313 mW/g

802.11a /Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm


Reference Value = 6.80 V/m; Power Drift = -0.387 dB

Peak SAR (extrapolated) = 0.645 W/kg

SAR(1 g) = 0.203 mW/g; SAR(10 g) = 0.083 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.315 mW/g

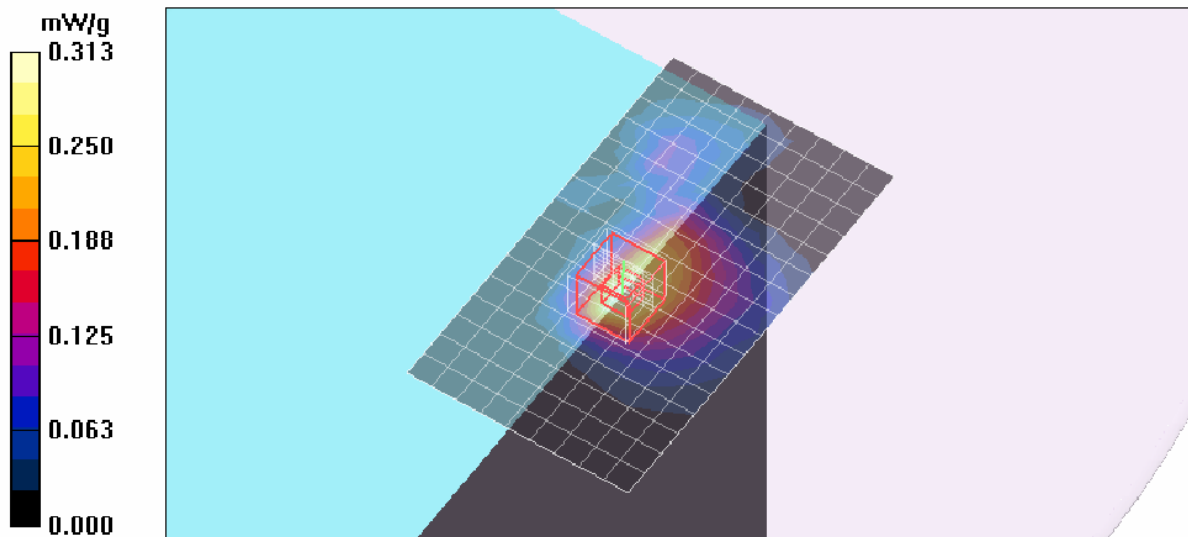

Worst-case SAR Plots for 5.5 GHz Band

Date/Time: 4/9/2009 9:53:09 AM

Test Laboratory: Compliance Certification Services

5.5 GHz Band

DUT: Lenovo; Type: Y550; Serial: n/a

Communication System: 802.11abgn; Frequency: 5600 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5600$ MHz; $\sigma = 6.02$ mho/m; $\epsilon_r = 48.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(3.5, 3.5, 3.5); Calibrated: 4/23/2008
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

802.11a /Area Scan (10x17x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.574 mW/g

802.11a /Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 8.57 V/m; Power Drift = -0.278 dB
Peak SAR (extrapolated) = 1.26 W/kg
SAR(1 g) = 0.371 mW/g; SAR(10 g) = 0.153 mW/g
Maximum value of SAR (measured) = 0.592 mW/g

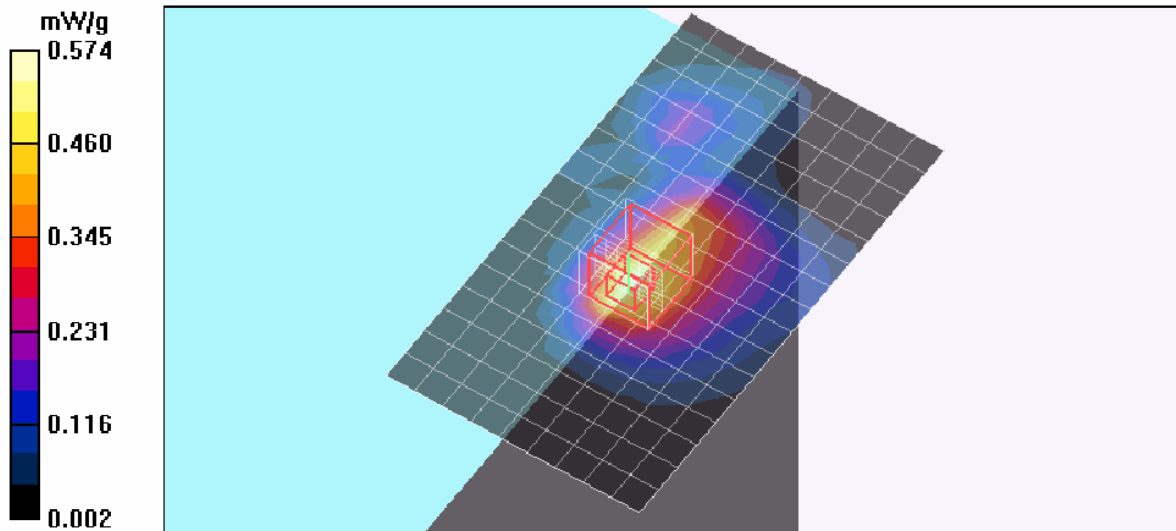

Worst-case SAR Plots for 5.8 GHz Band

Date/Time: 4/9/2009 11:02:06 AM

Test Laboratory: Compliance Certification Services

5.8 GHz Band

DUT: Lenovo; Type: Y550; Serial: n/a

Communication System: 802.11abgn; Frequency: 5785 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 6.27$ mho/m; $\epsilon_r = 47.7$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Room Ambient Temperature: 25.0 deg. C; Liquid Temperature: 24.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV3 - SN3531; ConvF(3.7, 3.7, 3.7); Calibrated: 4/23/2008
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

802.11a/Area Scan (10x17x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.498 mW/g

802.11a/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm


Reference Value = 7.59 V/m; Power Drift = 0.286 dB

Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.326 mW/g; SAR(10 g) = 0.132 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.523 mW/g

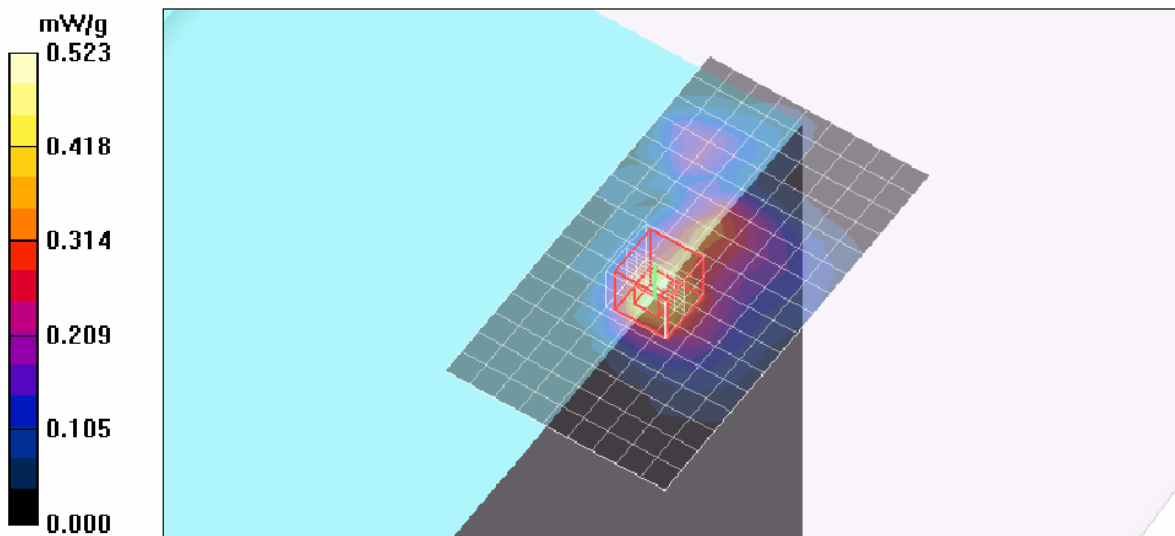

13. ATTACHMENTS

No.	Contents	No. of page (s)
1	System Performance Check Plots	6
2-1	SAR Test Plots for 2.4 GHz	3
2-2	SAR Test Plots for 5 GHz	9
3	Certificate of E-Field Probe - EX3DV3SN3531	10
4	Certificate of System Validation Dipole - D2450V2 SN:748	6
5	Certificate of System Validation Dipole - D5GHzV2 SN:1003	15