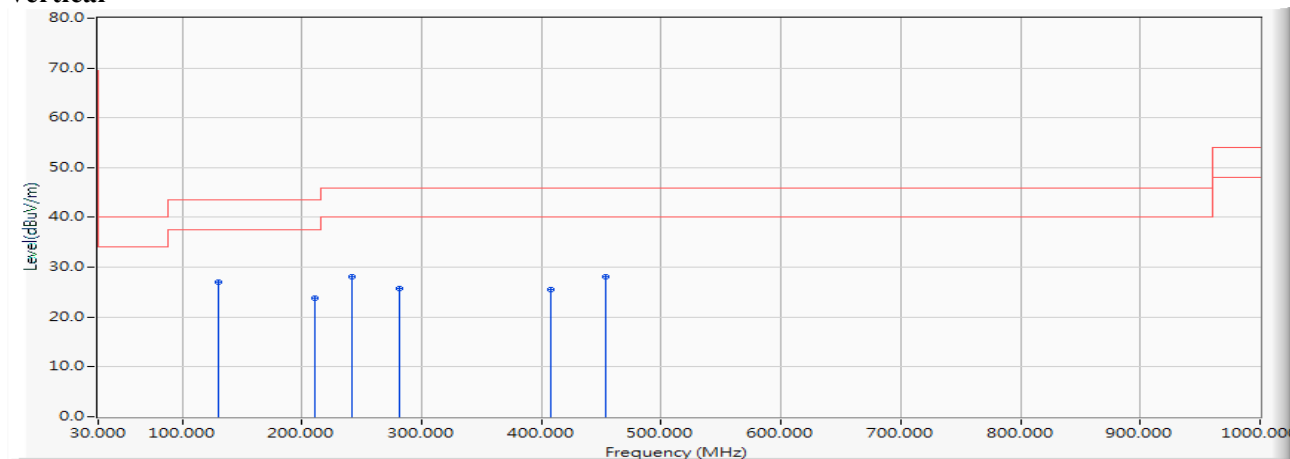


Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/04/08
 Test Mode : Mode 17: SISO B: Transmit (802.11ax-80BW_36Mbps) (5530MHz)


Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	129.812	-12.400	39.366	26.966	-16.534	43.500	QUASIPeAK
2		211.348	-13.468	37.382	23.913	-19.587	43.500	QUASIPeAK
3		242.275	-12.182	40.356	28.173	-17.827	46.000	QUASIPeAK
4		281.638	-10.853	36.638	25.785	-20.215	46.000	QUASIPeAK
5		408.159	-7.834	33.416	25.582	-20.418	46.000	QUASIPeAK
6		453.145	-6.741	34.941	28.199	-17.801	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/04/08
 Test Mode : Mode 17: SISO B: Transmit (802.11ax-80BW_36Mbps) (5775MHz)

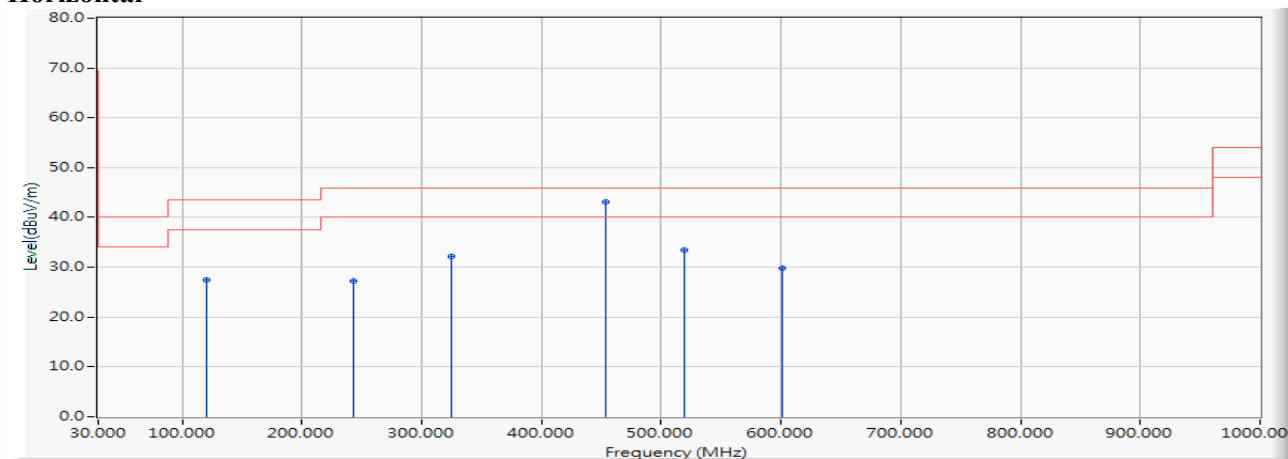Horizontal


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		119.971	-13.432	40.784	27.352	-16.148	43.500	QUASIPeAK
2		243.681	-12.163	39.367	27.203	-18.797	46.000	QUASIPeAK
3		325.217	-9.751	41.915	32.164	-13.836	46.000	QUASIPeAK
4	*	453.145	-6.741	49.773	43.031	-2.969	46.000	QUASIPeAK
5		519.217	-5.656	39.173	33.516	-12.484	46.000	QUASIPeAK
6		600.754	-4.000	33.836	29.836	-16.164	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/04/08
 Test Mode : Mode 17: SISO B: Transmit (802.11ax-80BW_36Mbps) (5775MHz)

Vertical

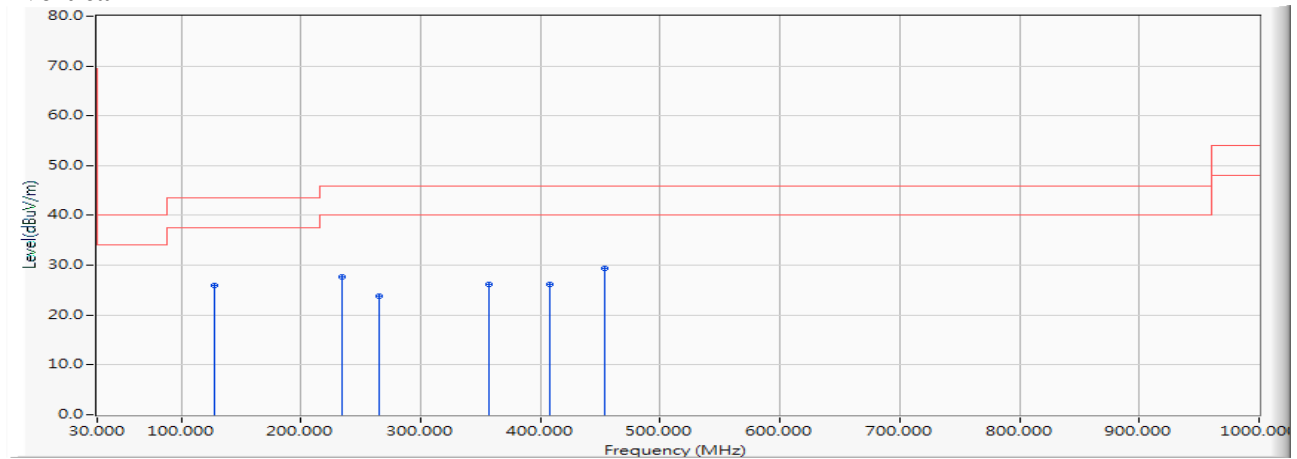


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		128.406	-12.547	38.419	25.871	-17.629	43.500	QUASIPeAK
2		233.841	-12.660	40.396	27.736	-18.264	46.000	QUASIPeAK
3		264.768	-11.649	35.534	23.884	-22.116	46.000	QUASIPeAK
4		357.551	-9.007	35.074	26.067	-19.933	46.000	QUASIPeAK
5		408.159	-7.834	34.006	26.172	-19.828	46.000	QUASIPeAK
6	*	453.145	-6.741	36.046	29.304	-16.696	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/04/08
 Test Mode : Mode 18: SISO B: Transmit (802.11ax-160BW_72.1Mbps) (5250MHz)

Horizontal

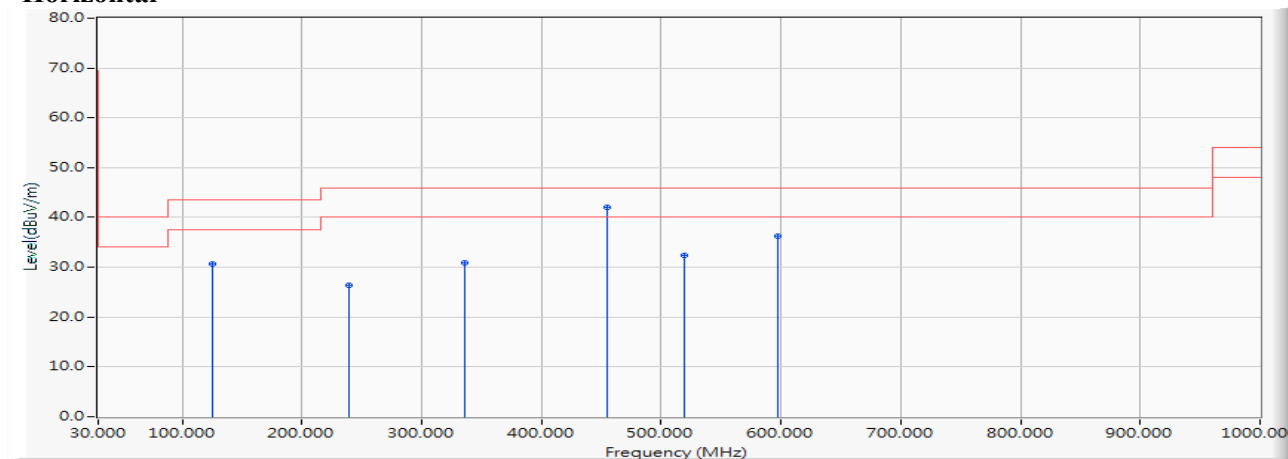


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		125.594	-12.844	43.499	30.655	-12.845	43.500	QUASIPeAK
2		239.464	-12.250	38.646	26.395	-19.605	46.000	QUASIPeAK
3		336.464	-9.494	40.325	30.831	-15.169	46.000	QUASIPeAK
4	*	454.551	-6.717	48.825	42.107	-3.893	46.000	QUASIPeAK
5		519.217	-5.656	37.963	32.306	-13.694	46.000	QUASIPeAK
6		597.942	-4.053	40.212	36.159	-9.841	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/04/08
 Test Mode : Mode 18: SISO B: Transmit (802.11ax-160BW_72.1Mbps) (5250MHz)

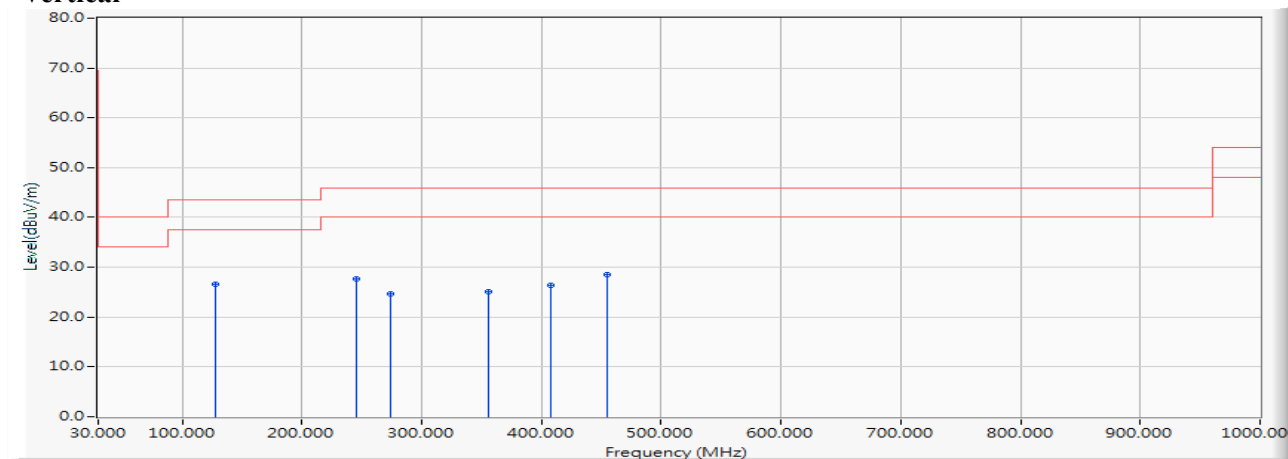Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	128.406	-12.547	39.243	26.695	-16.805	43.500	QUASIPeAK
2		245.087	-12.146	39.916	27.770	-18.230	46.000	QUASIPeAK
3		274.609	-11.121	35.806	24.684	-21.316	46.000	QUASIPeAK
4		356.145	-9.039	34.200	25.162	-20.838	46.000	QUASIPeAK
5		408.159	-7.834	34.268	26.434	-19.566	46.000	QUASIPeAK
6		454.551	-6.717	35.144	28.426	-17.574	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/04/08
 Test Mode : Mode 18: SISO B: Transmit (802.11ax-160BW_72.1Mbps) (5570MHz)

Horizontal

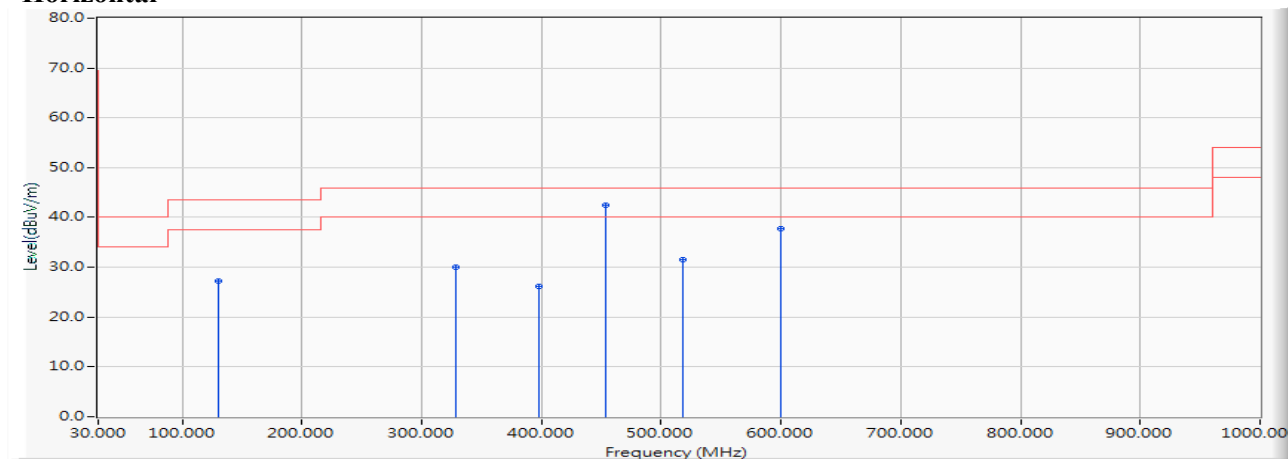


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		129.812	-12.400	39.587	27.187	-16.313	43.500	QUASIPeAK
2		328.029	-9.687	39.795	30.108	-15.892	46.000	QUASIPeAK
3		398.319	-8.074	34.224	26.150	-19.850	46.000	QUASIPeAK
4	*	453.145	-6.741	49.140	42.398	-3.602	46.000	QUASIPeAK
5		517.812	-5.679	37.173	31.494	-14.506	46.000	QUASIPeAK
6		599.348	-4.021	41.755	37.734	-8.266	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/04/08
 Test Mode : Mode 18: SISO B: Transmit (802.11ax-160BW_72.1Mbps) (5570MHz)

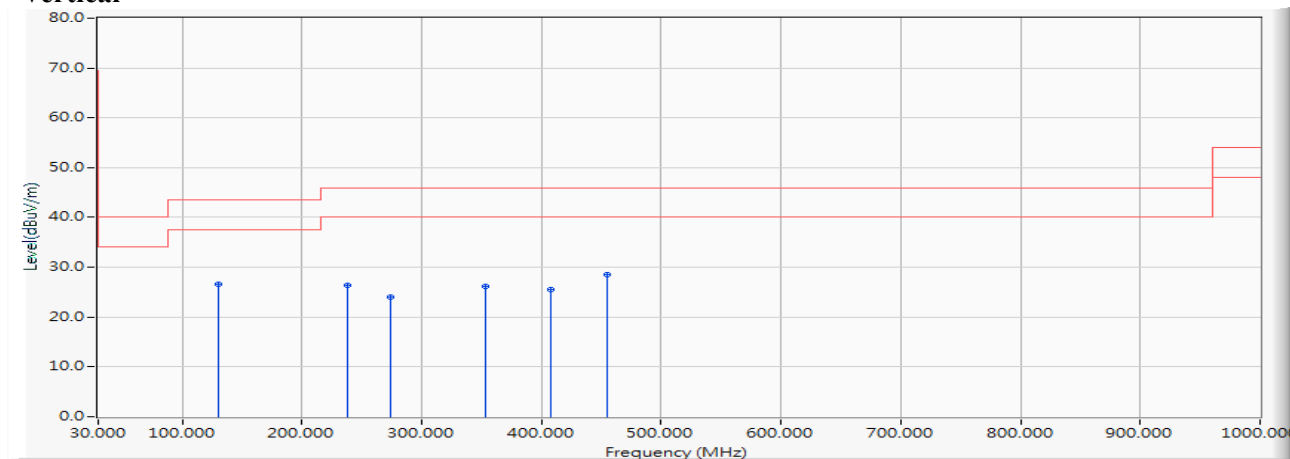Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	129.812	-12.400	38.953	26.553	-16.947	43.500	QUASIPeAK
2		238.058	-12.352	38.634	26.281	-19.719	46.000	QUASIPeAK
3		274.609	-11.121	35.168	24.046	-21.954	46.000	QUASIPeAK
4		353.333	-9.103	35.236	26.134	-19.866	46.000	QUASIPeAK
5		408.159	-7.834	33.336	25.502	-20.498	46.000	QUASIPeAK
6		454.551	-6.717	35.285	28.567	-17.433	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/04/08
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps) (5220MHz)

Horizontal

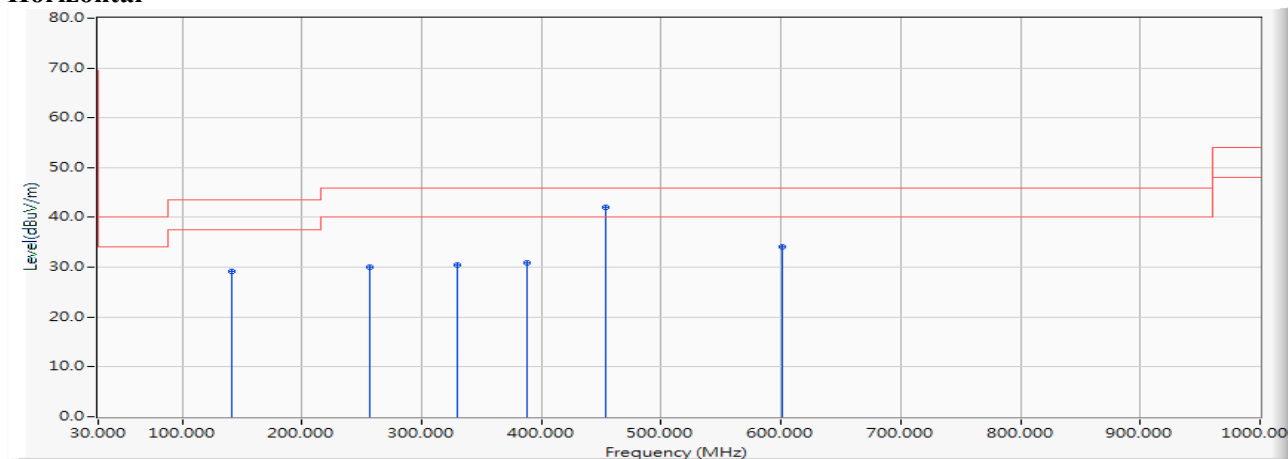


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBµV)	Measure Level (dBµV/m)	Margin (dB)	Limit (dBµV/m)	Detector Type
1		141.058	-11.394	40.592	29.198	-14.302	43.500	QUASIPeAK
2		256.333	-11.998	42.010	30.011	-15.989	46.000	QUASIPeAK
3		329.435	-9.655	40.174	30.519	-15.481	46.000	QUASIPeAK
4		388.478	-8.299	39.270	30.972	-15.028	46.000	QUASIPeAK
5	*	453.145	-6.741	48.795	42.053	-3.947	46.000	QUASIPeAK
6		600.754	-4.000	38.171	34.171	-11.829	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/04/08
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps) (5220MHz)

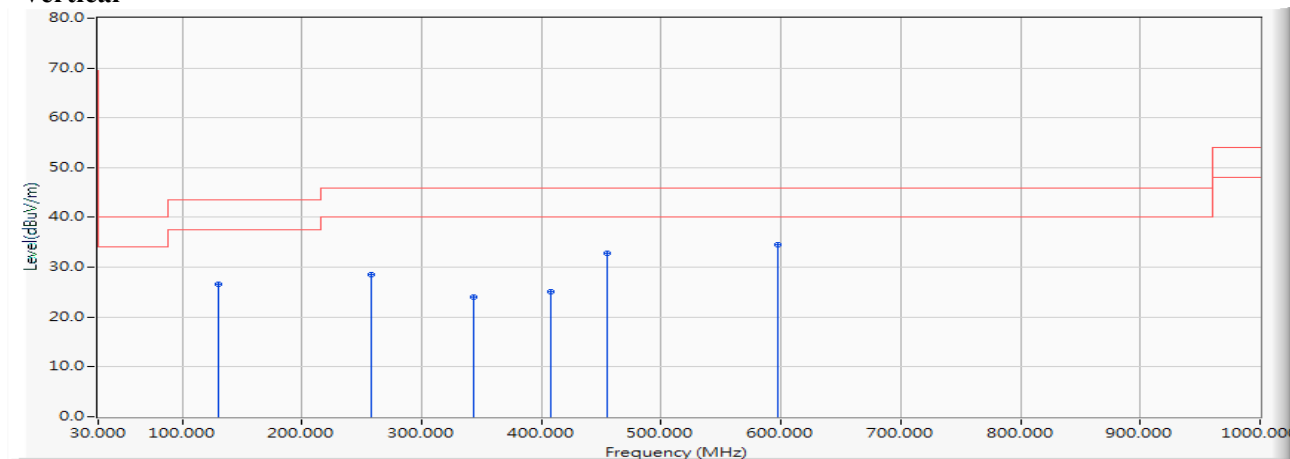Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		129.812	-12.400	39.029	26.629	-16.871	43.500	QUASIPeAK
2		257.739	-11.981	40.586	28.605	-17.395	46.000	QUASIPeAK
3		343.493	-9.331	33.307	23.976	-22.024	46.000	QUASIPeAK
4		408.159	-7.834	32.856	25.022	-20.978	46.000	QUASIPeAK
5		454.551	-6.717	39.595	32.877	-13.123	46.000	QUASIPeAK
6	*	597.942	-4.053	38.682	34.629	-11.371	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/04/08
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps) (5300MHz)

Horizontal

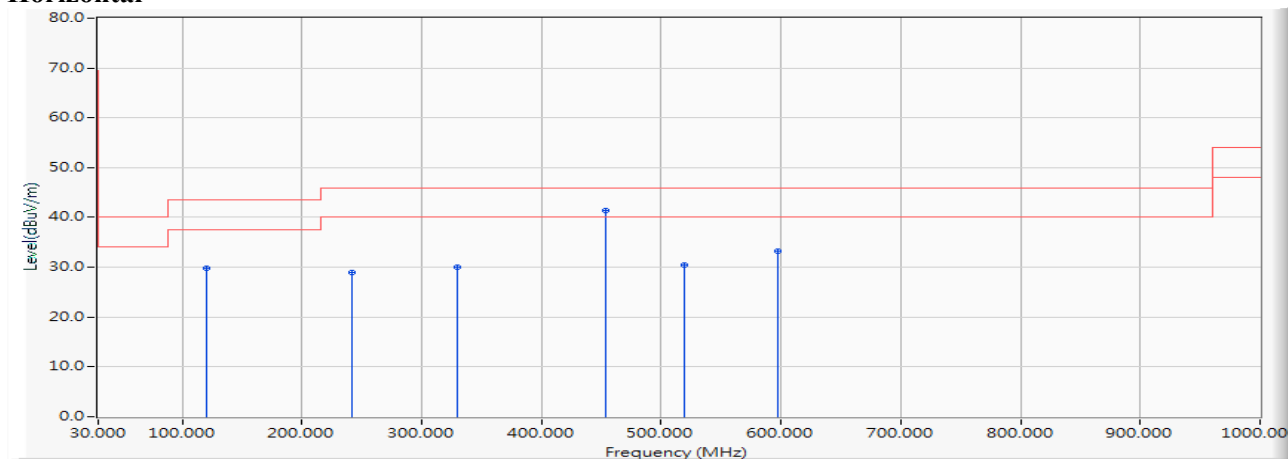


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		119.971	-13.432	43.340	29.908	-13.592	43.500	QUASIPeAK
2		242.275	-12.182	41.111	28.928	-17.072	46.000	QUASIPeAK
3		329.435	-9.655	39.621	29.966	-16.034	46.000	QUASIPeAK
4	*	453.145	-6.741	48.235	41.493	-4.507	46.000	QUASIPeAK
5		519.217	-5.656	36.181	30.524	-15.476	46.000	QUASIPeAK
6		597.942	-4.053	37.324	33.271	-12.729	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/04/08
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps) (5300MHz)

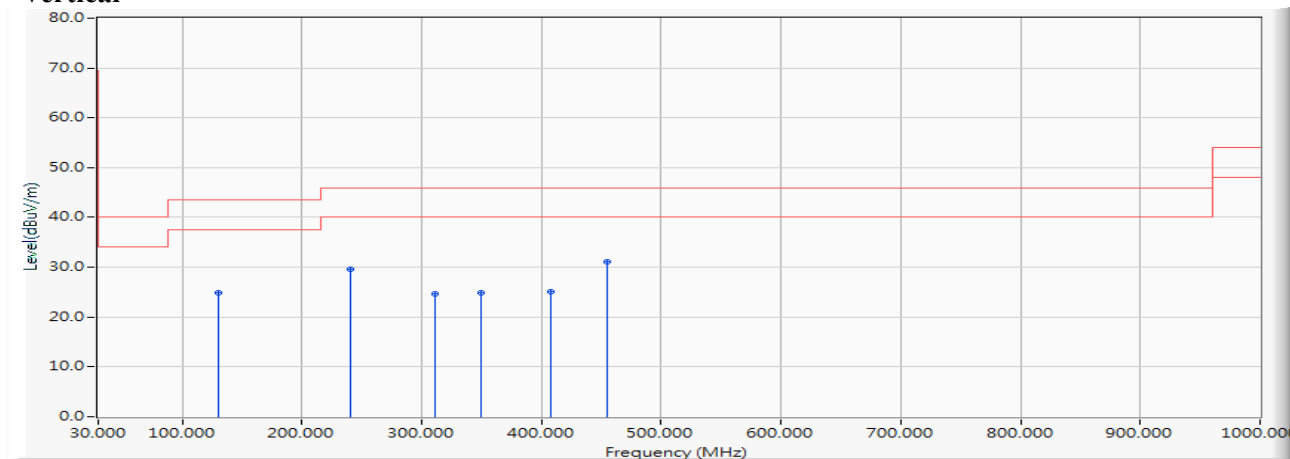Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		129.812	-12.400	37.316	24.916	-18.584	43.500	QUASIPeAK
2		240.870	-12.200	41.784	29.584	-16.416	46.000	QUASIPeAK
3		311.159	-10.076	34.752	24.676	-21.324	46.000	QUASIPeAK
4		349.116	-9.199	34.148	24.948	-21.052	46.000	QUASIPeAK
5		408.159	-7.834	32.984	25.150	-20.850	46.000	QUASIPeAK
6	*	454.551	-6.717	37.799	31.081	-14.919	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/04/08
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps) (5580MHz)

Horizontal

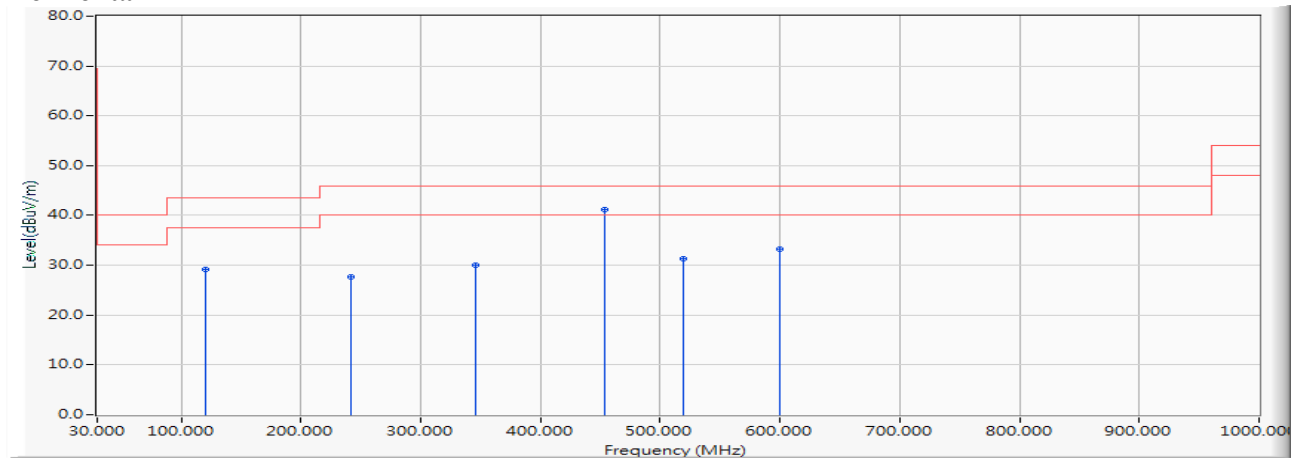


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		119.971	-13.432	42.558	29.126	-14.374	43.500	QUASIPeAK
2		242.275	-12.182	39.781	27.598	-18.402	46.000	QUASIPeAK
3		346.304	-9.265	39.333	30.068	-15.932	46.000	QUASIPeAK
4	*	453.145	-6.741	47.885	41.143	-4.857	46.000	QUASIPeAK
5		519.217	-5.656	36.911	31.254	-14.746	46.000	QUASIPeAK
6		599.348	-4.021	37.232	33.211	-12.789	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/04/08
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps) (5580MHz)

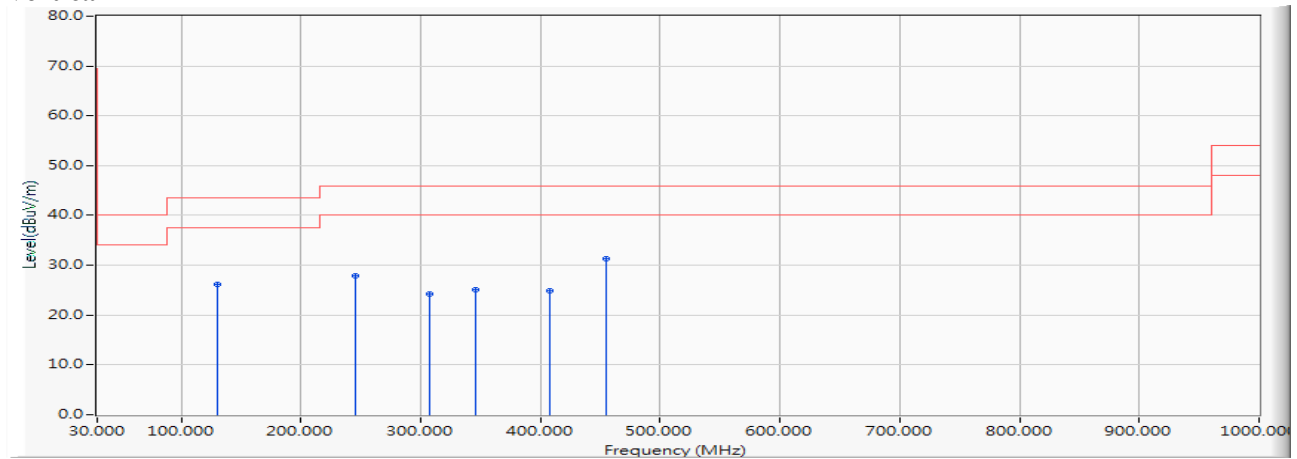Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		129.812	-12.400	38.631	26.231	-17.269	43.500	QUASIPeAK
2		245.087	-12.146	40.081	27.935	-18.065	46.000	QUASIPeAK
3		306.942	-10.176	34.345	24.169	-21.831	46.000	QUASIPeAK
4		346.304	-9.265	34.289	25.024	-20.976	46.000	QUASIPeAK
5		408.159	-7.834	32.666	24.832	-21.168	46.000	QUASIPeAK
6	*	454.551	-6.717	37.980	31.262	-14.738	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/04/08
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps) (5720MHz)

Horizontal

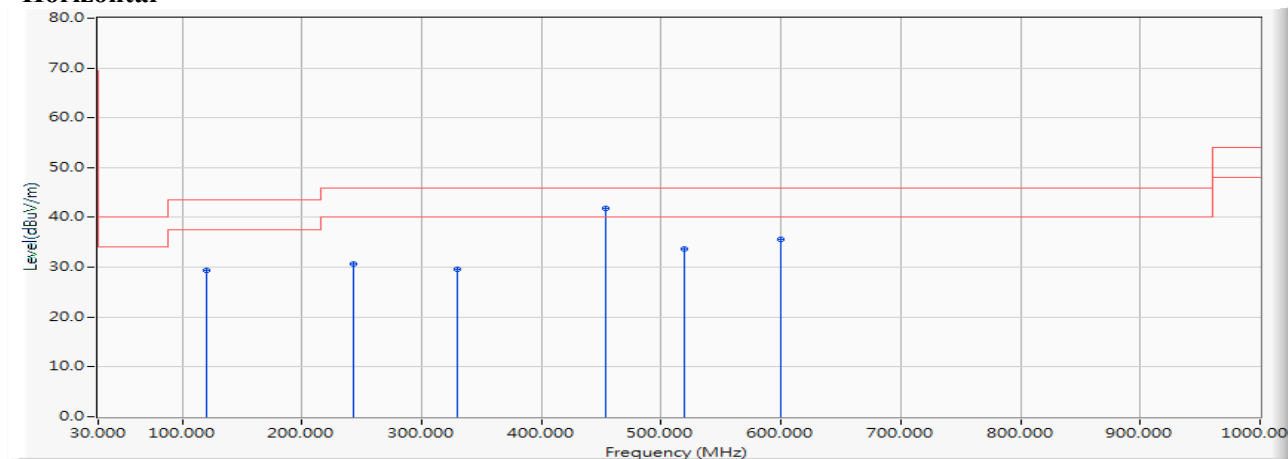


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		119.971	-13.432	42.793	29.361	-14.139	43.500	QUASIPeAK
2		243.681	-12.163	42.867	30.703	-15.297	46.000	QUASIPeAK
3		329.435	-9.655	39.200	29.545	-16.455	46.000	QUASIPeAK
4	*	453.145	-6.741	48.591	41.849	-4.151	46.000	QUASIPeAK
5		519.217	-5.656	39.416	33.759	-12.241	46.000	QUASIPeAK
6		599.348	-4.021	39.583	35.562	-10.438	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/04/08
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps) (5720MHz)

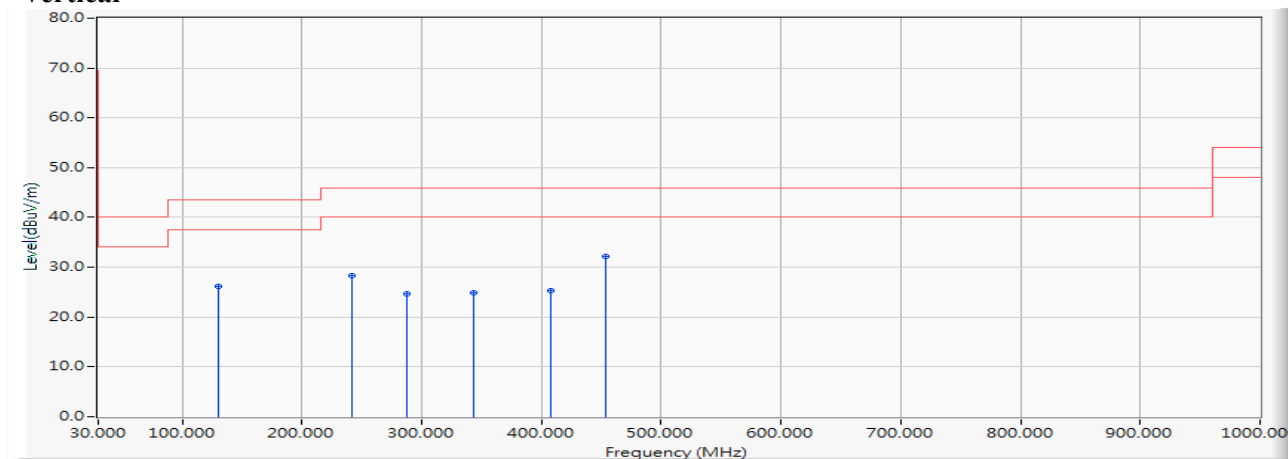Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		129.812	-12.400	38.583	26.183	-17.317	43.500	QUASIPeAK
2		242.275	-12.182	40.416	28.233	-17.767	46.000	QUASIPeAK
3		287.261	-10.727	35.480	24.753	-21.247	46.000	QUASIPeAK
4		343.493	-9.331	34.182	24.851	-21.149	46.000	QUASIPeAK
5		408.159	-7.834	33.100	25.266	-20.734	46.000	QUASIPeAK
6	*	453.145	-6.741	38.915	32.173	-13.827	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/04/08
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps) (5785MHz)

Horizontal

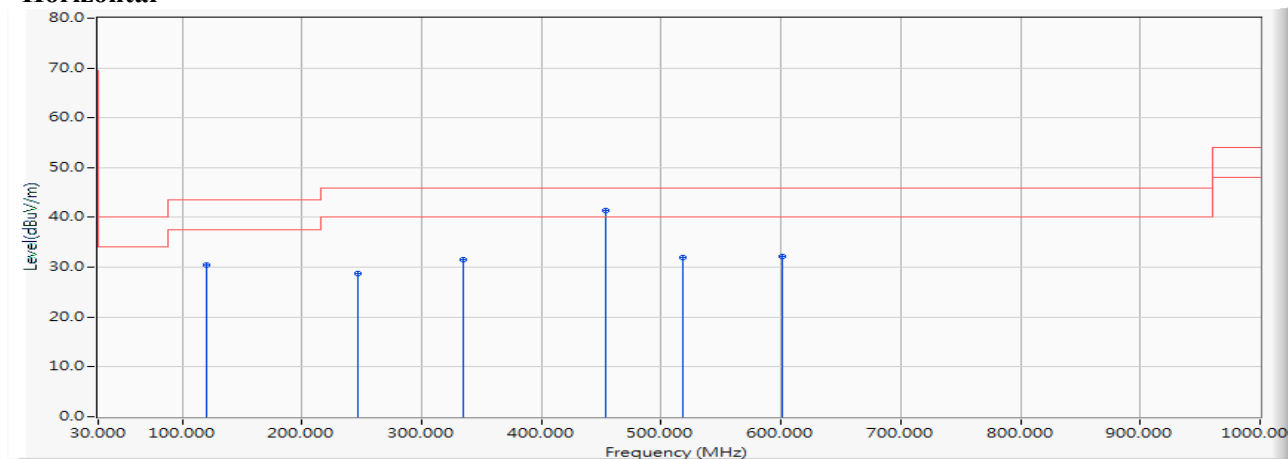


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		119.971	-13.432	43.789	30.357	-13.143	43.500	QUASIPeAK
2		246.493	-12.128	40.909	28.781	-17.219	46.000	QUASIPeAK
3		335.058	-9.526	41.060	31.534	-14.466	46.000	QUASIPeAK
4	*	453.145	-6.741	48.167	41.425	-4.575	46.000	QUASIPeAK
5		517.812	-5.679	37.611	31.932	-14.068	46.000	QUASIPeAK
6		600.754	-4.000	36.171	32.171	-13.829	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/04/08
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps) (5785MHz)

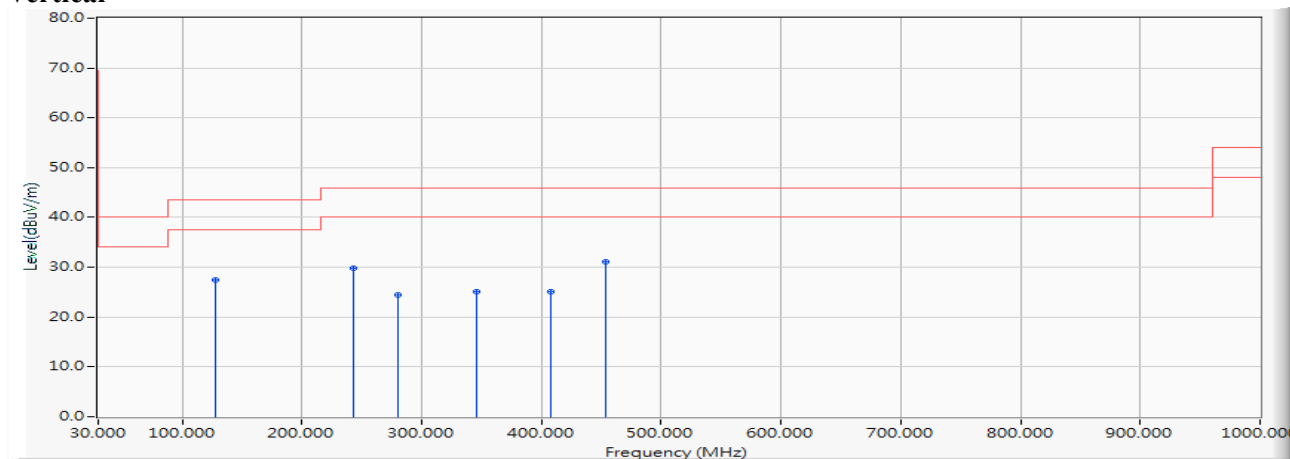Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		128.406	-12.547	40.082	27.534	-15.966	43.500	QUASIPeAK
2		243.681	-12.163	41.967	29.803	-16.197	46.000	QUASIPeAK
3		280.232	-10.886	35.236	24.350	-21.650	46.000	QUASIPeAK
4		346.304	-9.265	34.332	25.067	-20.933	46.000	QUASIPeAK
5		408.159	-7.834	32.860	25.026	-20.974	46.000	QUASIPeAK
6	*	453.145	-6.741	37.941	31.199	-14.801	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/04/08
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps) (5230MHz)

Horizontal

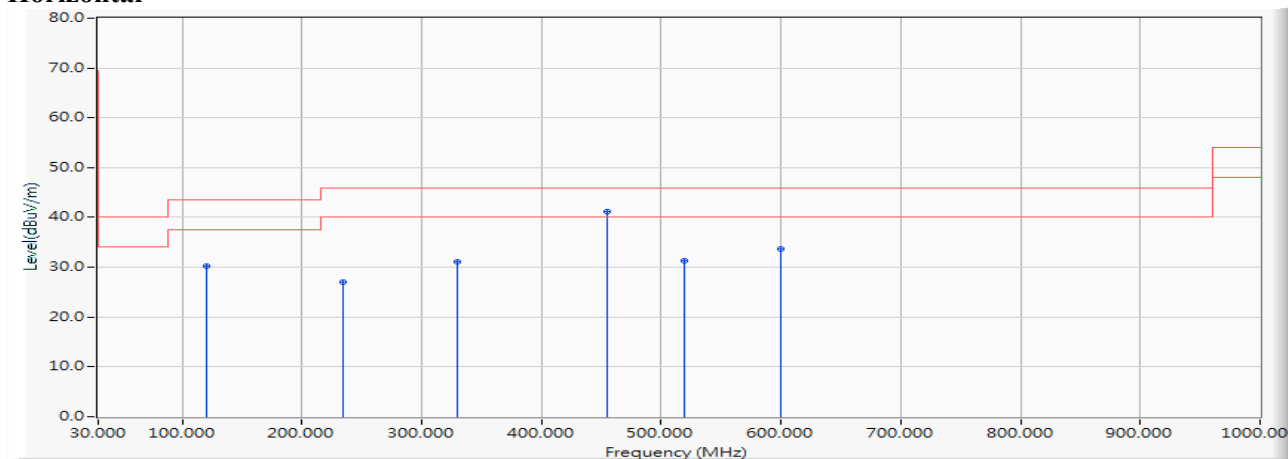


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		119.971	-13.432	43.662	30.230	-13.270	43.500	QUASIPeAK
2		233.841	-12.660	39.634	26.974	-19.026	46.000	QUASIPeAK
3		329.435	-9.655	40.802	31.147	-14.853	46.000	QUASIPeAK
4	*	454.551	-6.717	47.953	41.235	-4.765	46.000	QUASIPeAK
5		519.217	-5.656	36.884	31.227	-14.773	46.000	QUASIPeAK
6		599.348	-4.021	37.748	33.727	-12.273	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/04/08
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps) (5230MHz)

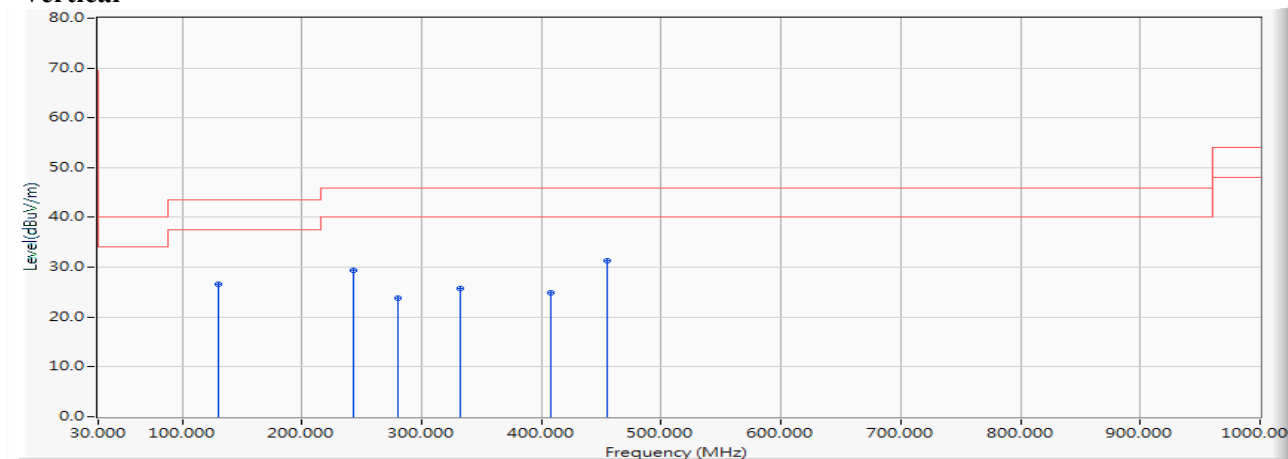Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		129.812	-12.400	39.030	26.630	-16.870	43.500	QUASIPeAK
2		243.681	-12.163	41.637	29.473	-16.527	46.000	QUASIPeAK
3		280.232	-10.886	34.588	23.702	-22.298	46.000	QUASIPeAK
4		332.246	-9.591	35.315	25.725	-20.275	46.000	QUASIPeAK
5		408.159	-7.834	32.750	24.916	-21.084	46.000	QUASIPeAK
6	*	454.551	-6.717	37.968	31.250	-14.750	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/04/08
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps) (5310MHz)

Horizontal

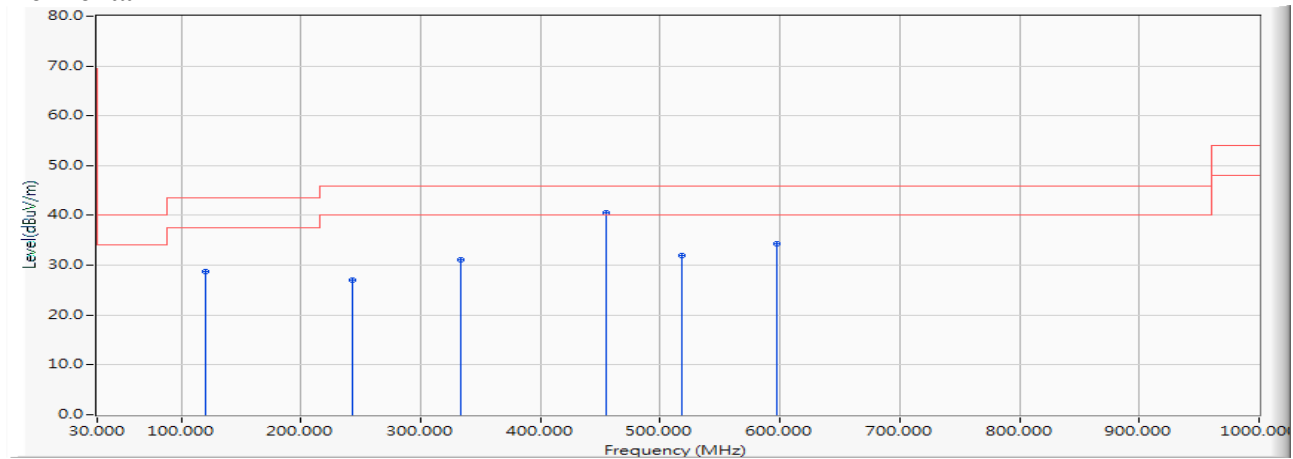


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		119.971	-13.432	42.111	28.679	-14.821	43.500	QUASIPeAK
2		243.681	-12.163	39.283	27.119	-18.881	46.000	QUASIPeAK
3		333.652	-9.559	40.563	31.004	-14.996	46.000	QUASIPeAK
4	*	454.551	-6.717	47.198	40.480	-5.520	46.000	QUASIPeAK
5		517.812	-5.679	37.617	31.938	-14.062	46.000	QUASIPeAK
6		597.942	-4.053	38.361	34.308	-11.692	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/04/08
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps) (5310MHz)

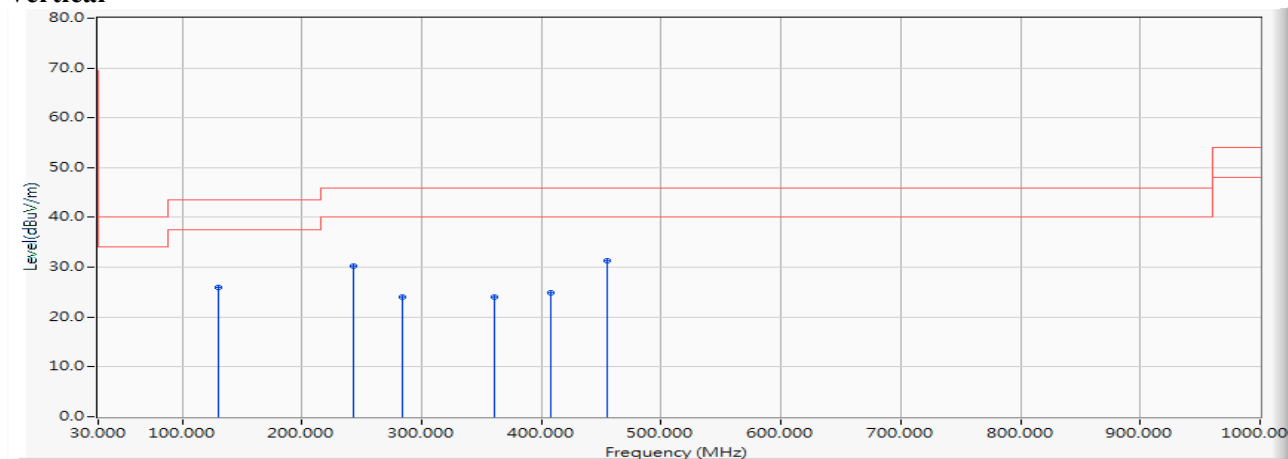Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		129.812	-12.400	38.432	26.032	-17.468	43.500	QUASIPeAK
2		243.681	-12.163	42.446	30.282	-15.718	46.000	QUASIPeAK
3		284.449	-10.791	34.887	24.097	-21.903	46.000	QUASIPeAK
4		360.362	-8.943	32.918	23.976	-22.024	46.000	QUASIPeAK
5		408.159	-7.834	32.701	24.867	-21.133	46.000	QUASIPeAK
6	*	454.551	-6.717	38.053	31.335	-14.665	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/04/08
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps) (5550MHz)

Horizontal

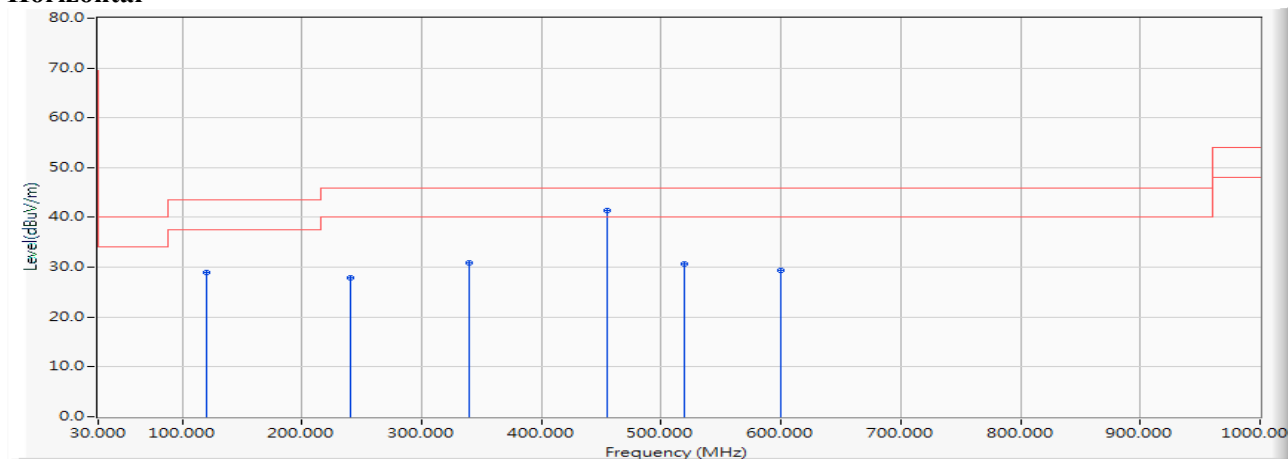


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		119.971	-13.432	42.298	28.866	-14.634	43.500	QUASIPeAK
2		240.870	-12.200	40.038	27.838	-18.162	46.000	QUASIPeAK
3		339.275	-9.429	40.289	30.860	-15.140	46.000	QUASIPeAK
4	*	454.551	-6.717	48.150	41.432	-4.568	46.000	QUASIPeAK
5		519.217	-5.656	36.431	30.774	-15.226	46.000	QUASIPeAK
6		599.348	-4.021	33.420	29.399	-16.601	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/04/08
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps) (5550MHz)

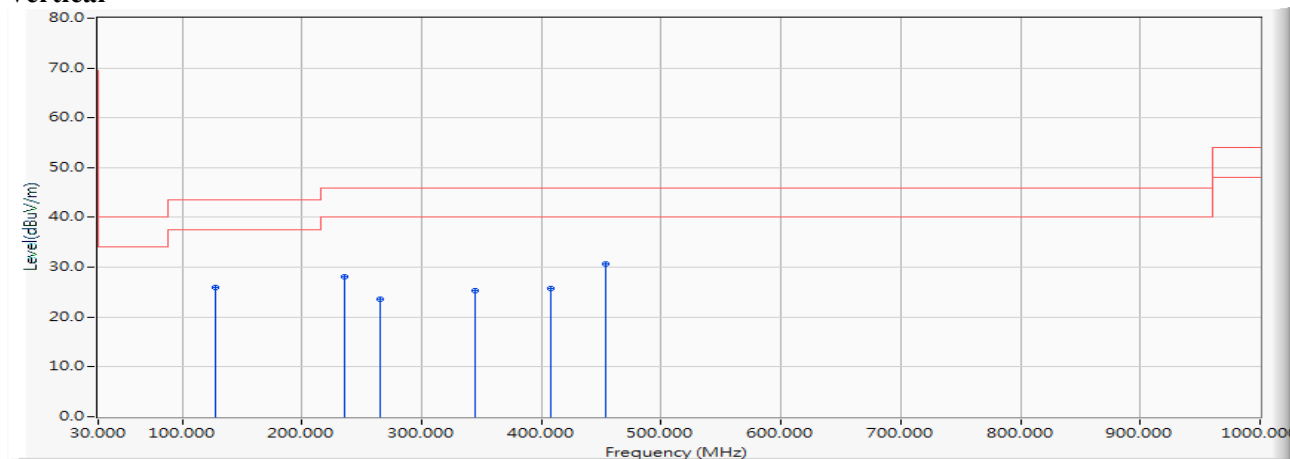Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		128.406	-12.547	38.420	25.872	-17.628	43.500	QUASIPeAK
2		235.246	-12.558	40.661	28.103	-17.897	46.000	QUASIPeAK
3		264.768	-11.649	35.200	23.550	-22.450	46.000	QUASIPeAK
4		344.899	-9.298	34.643	25.345	-20.655	46.000	QUASIPeAK
5		408.159	-7.834	33.649	25.815	-20.185	46.000	QUASIPeAK
6	*	453.145	-6.741	37.348	30.606	-15.394	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/04/08
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps) (5710MHz)

Horizontal

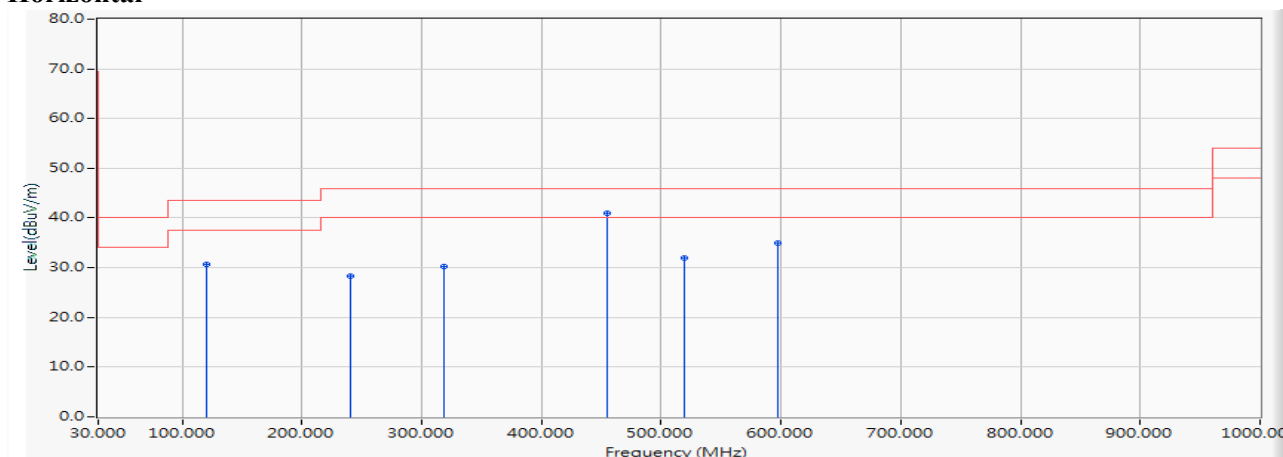


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		119.971	-13.432	44.065	30.633	-12.867	43.500	QUASIPeAK
2		240.870	-12.200	40.522	28.322	-17.678	46.000	QUASIPeAK
3		318.188	-9.912	40.171	30.260	-15.740	46.000	QUASIPeAK
4	*	454.551	-6.717	47.582	40.864	-5.136	46.000	QUASIPeAK
5		519.217	-5.656	37.510	31.853	-14.147	46.000	QUASIPeAK
6		597.942	-4.053	38.940	34.887	-11.113	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/04/08
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps) (5710MHz)

Vertical

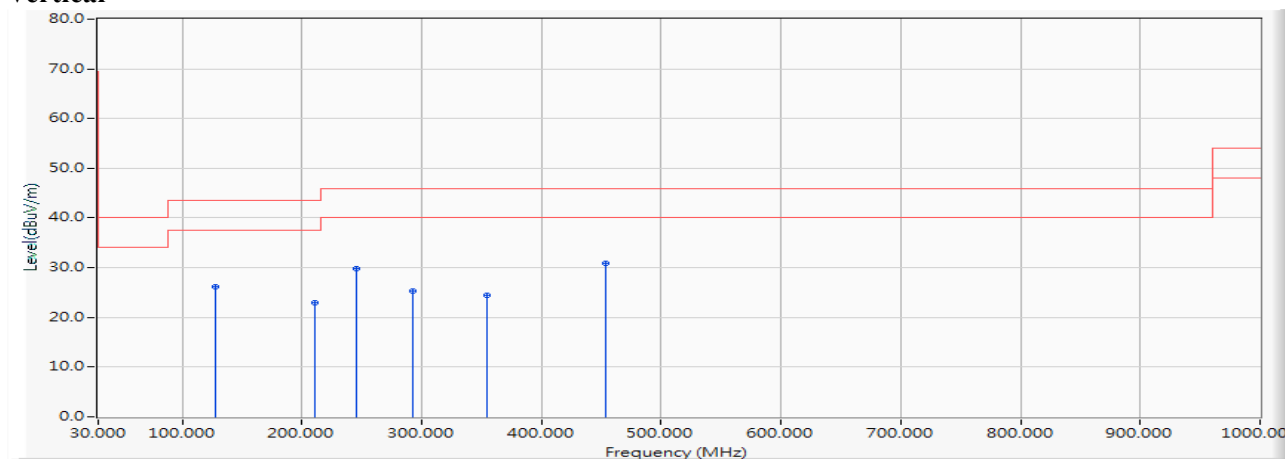


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		128.406	-12.547	38.660	26.112	-17.388	43.500	QUASIPeAK
2		211.348	-13.468	36.483	23.014	-20.486	43.500	QUASIPeAK
3		245.087	-12.146	41.965	29.819	-16.181	46.000	QUASIPeAK
4		292.884	-10.573	35.966	25.394	-20.606	46.000	QUASIPeAK
5		354.739	-9.070	33.438	24.368	-21.632	46.000	QUASIPeAK
6	*	453.145	-6.741	37.667	30.925	-15.075	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/04/08
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps) (5795MHz)

Horizontal

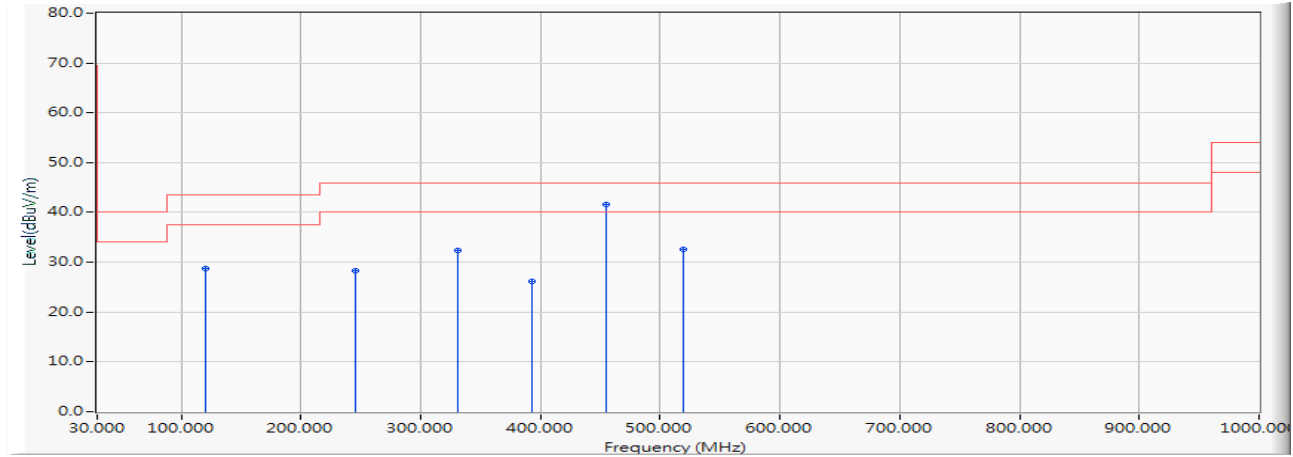


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		119.971	-13.432	42.205	28.773	-14.727	43.500	QUASIPeAK
2		245.087	-12.146	40.514	28.368	-17.632	46.000	QUASIPeAK
3		330.841	-9.623	41.971	32.348	-13.652	46.000	QUASIPeAK
4		392.696	-8.202	34.403	26.201	-19.799	46.000	QUASIPeAK
5	*	454.551	-6.717	48.409	41.691	-4.309	46.000	QUASIPeAK
6		519.217	-5.656	38.269	32.612	-13.388	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/04/08
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps) (5795MHz)

Vertical

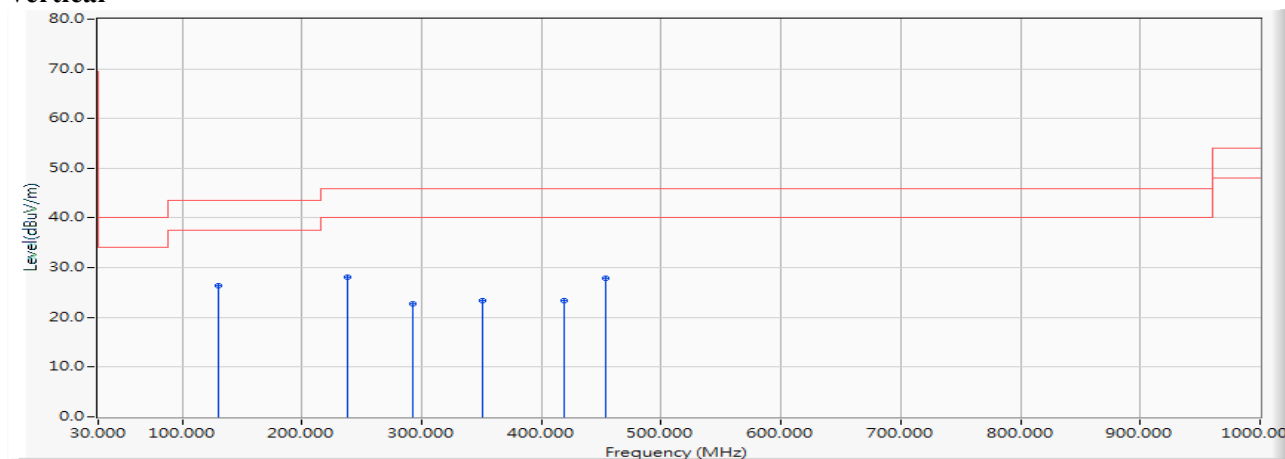


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	129.812	-12.400	38.744	26.344	-17.156	43.500	QUASIPeAK
2		238.058	-12.352	40.458	28.105	-17.895	46.000	QUASIPeAK
3		292.884	-10.573	33.412	22.840	-23.160	46.000	QUASIPeAK
4		350.522	-9.167	32.464	23.297	-22.703	46.000	QUASIPeAK
5		419.406	-7.553	30.894	23.341	-22.659	46.000	QUASIPeAK
6		453.145	-6.741	34.671	27.929	-18.071	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/04/08
 Test Mode : Mode 25: MIMO: Transmit (802.11ax-80BW_72.1Mbps) (5210MHz)

Horizontal

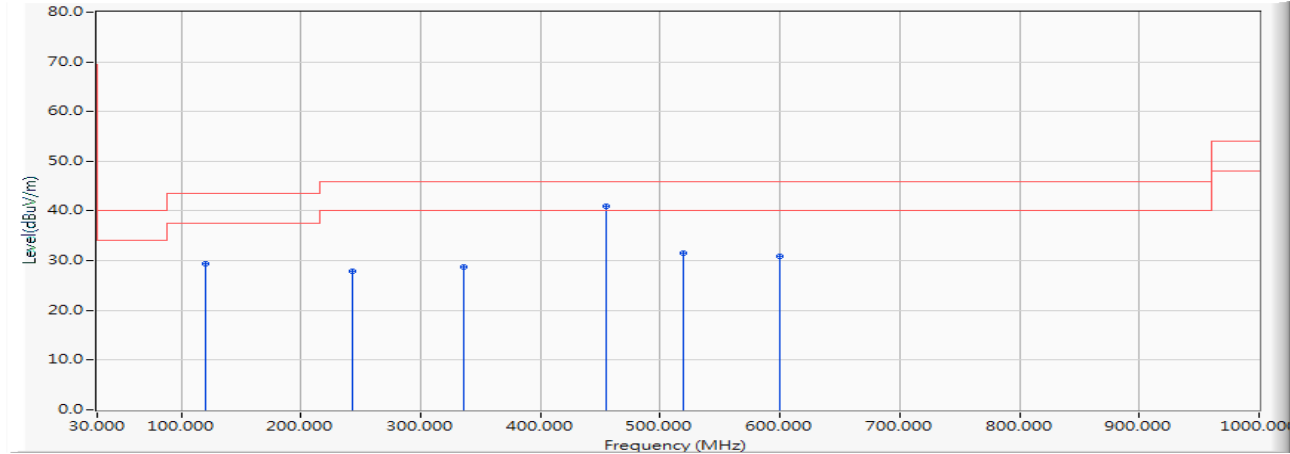


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		119.971	-13.432	42.722	29.290	-14.210	43.500	QUASIPeAK
2		243.681	-12.163	40.149	27.985	-18.015	46.000	QUASIPeAK
3		336.464	-9.494	38.281	28.787	-17.213	46.000	QUASIPeAK
4	*	454.551	-6.717	47.604	40.886	-5.114	46.000	QUASIPeAK
5		519.217	-5.656	37.184	31.527	-14.473	46.000	QUASIPeAK
6		599.348	-4.021	34.912	30.891	-15.109	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/04/08
 Test Mode : Mode 25: MIMO: Transmit (802.11ax-80BW_72.1Mbps) (5210MHz)

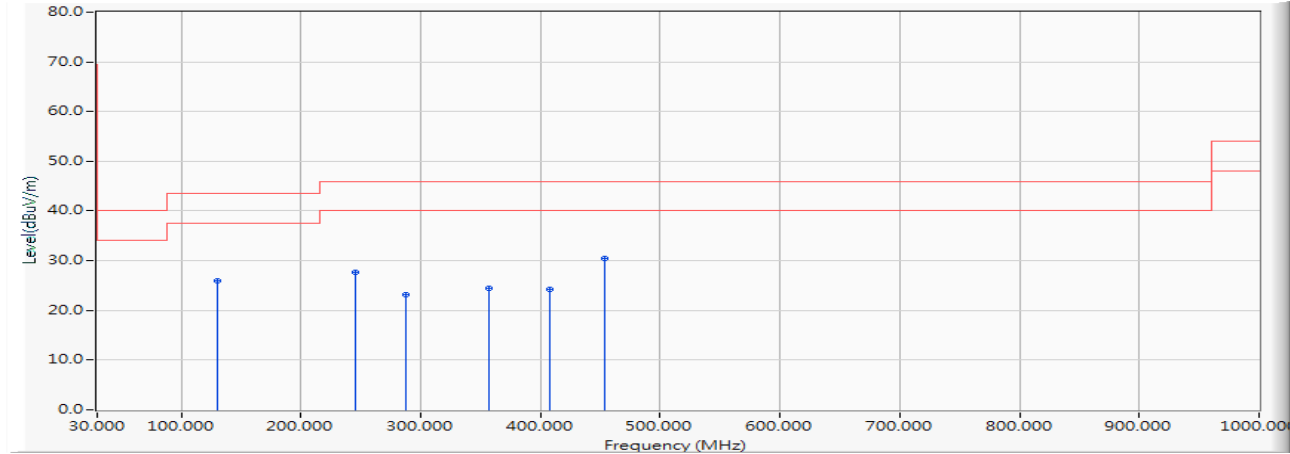Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		129.812	-12.400	38.379	25.979	-17.521	43.500	QUASIPeAK
2		245.087	-12.146	39.876	27.730	-18.270	46.000	QUASIPeAK
3		287.261	-10.727	33.980	23.253	-22.747	46.000	QUASIPeAK
4		357.551	-9.007	33.523	24.516	-21.484	46.000	QUASIPeAK
5		408.159	-7.834	32.004	24.170	-21.830	46.000	QUASIPeAK
6	*	453.145	-6.741	37.194	30.452	-15.548	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/04/08
 Test Mode : Mode 25: MIMO: Transmit (802.11ax-80BW_72.1Mbps) (5290MHz)

Horizontal

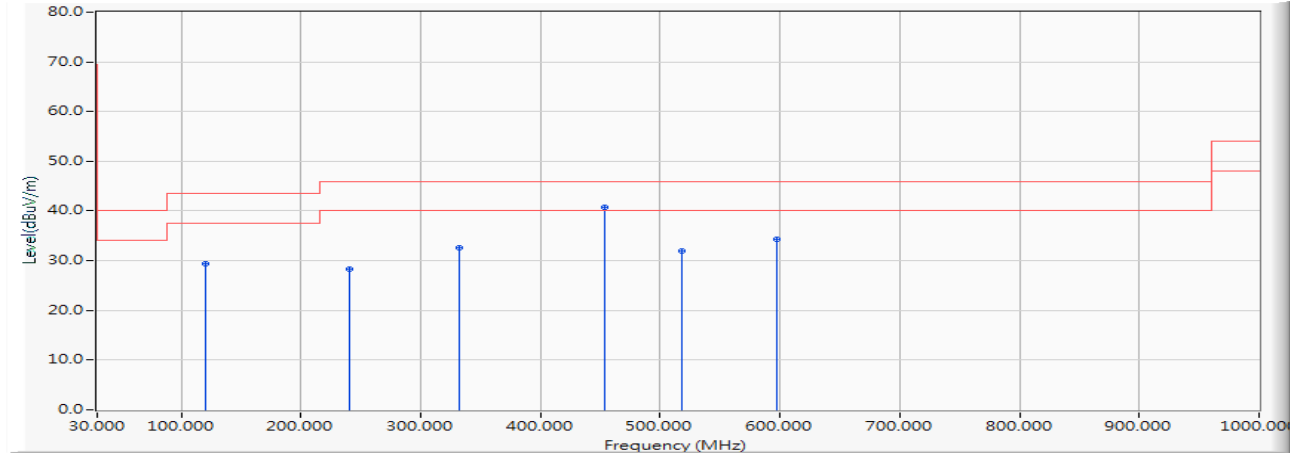


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		119.971	-13.432	42.735	29.303	-14.197	43.500	QUASIPeAK
2		240.870	-12.200	40.418	28.218	-17.782	46.000	QUASIPeAK
3		332.246	-9.591	42.131	32.541	-13.459	46.000	QUASIPeAK
4	*	453.145	-6.741	47.452	40.710	-5.290	46.000	QUASIPeAK
5		517.812	-5.679	37.714	32.035	-13.965	46.000	QUASIPeAK
6		597.942	-4.053	38.263	34.210	-11.790	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/04/08
 Test Mode : Mode 25: MIMO: Transmit (802.11ax-80BW_72.1Mbps) (5290MHz)

Vertical

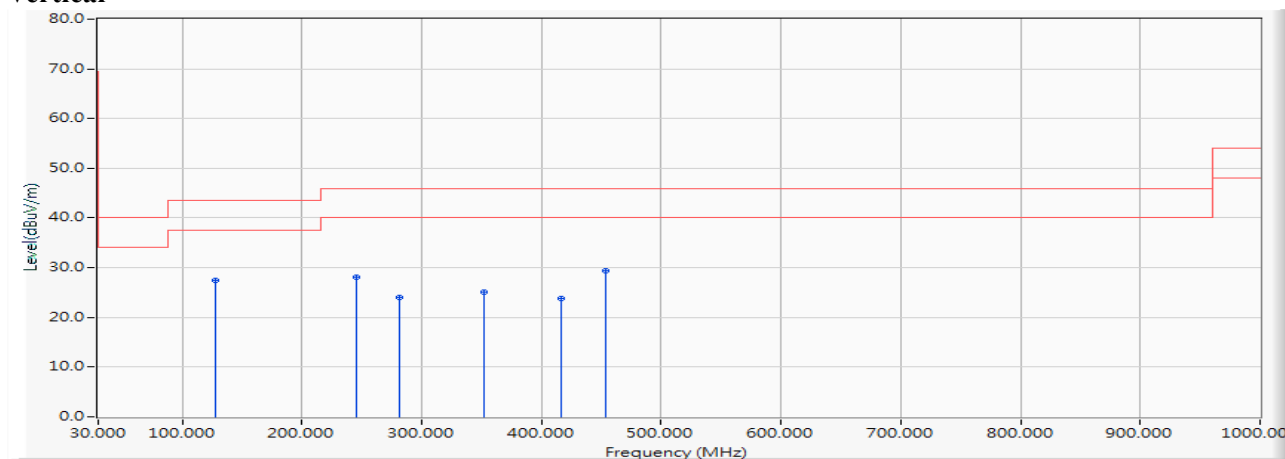


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	128.406	-12.547	39.937	27.389	-16.111	43.500	QUASIPeAK
2		245.087	-12.146	40.181	28.035	-17.965	46.000	QUASIPeAK
3		281.638	-10.853	34.894	24.041	-21.959	46.000	QUASIPeAK
4		351.928	-9.134	34.304	25.169	-20.831	46.000	QUASIPeAK
5		416.594	-7.623	31.475	23.852	-22.148	46.000	QUASIPeAK
6		453.145	-6.741	36.155	29.413	-16.587	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/04/08
 Test Mode : Mode 25: MIMO: Transmit (802.11ax-80BW_72.1Mbps) (5530MHz)

Horizontal

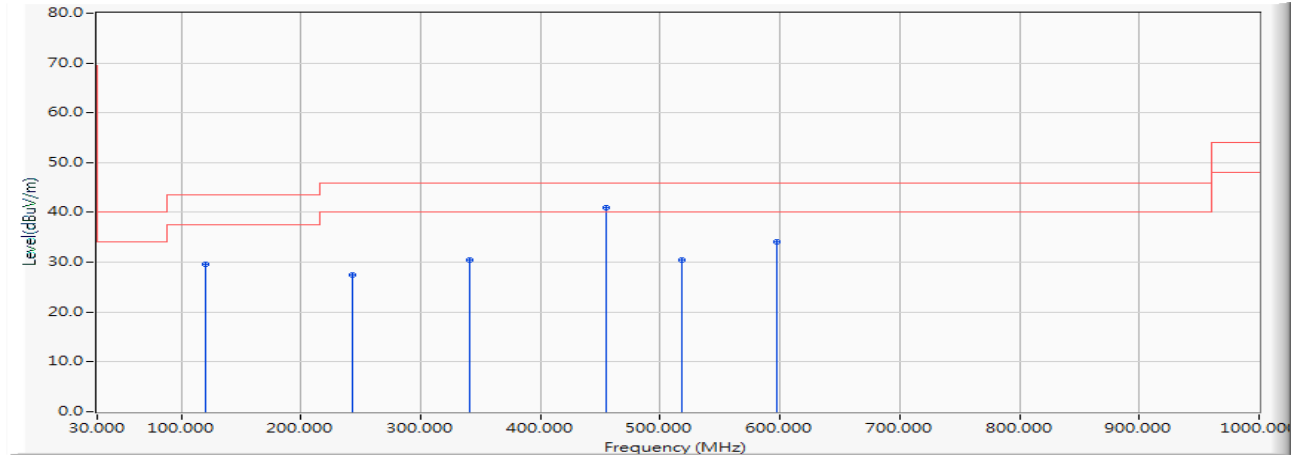


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		119.971	-13.432	43.040	29.608	-13.892	43.500	QUASIPeAK
2		243.681	-12.163	39.538	27.374	-18.626	46.000	QUASIPeAK
3		340.681	-9.396	39.950	30.555	-15.445	46.000	QUASIPeAK
4	*	454.551	-6.717	47.607	40.889	-5.111	46.000	QUASIPeAK
5		517.812	-5.679	36.205	30.526	-15.474	46.000	QUASIPeAK
6		597.942	-4.053	38.105	34.052	-11.948	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/04/08
 Test Mode : Mode 25: MIMO: Transmit (802.11ax-80BW_72.1Mbps) (5530MHz)

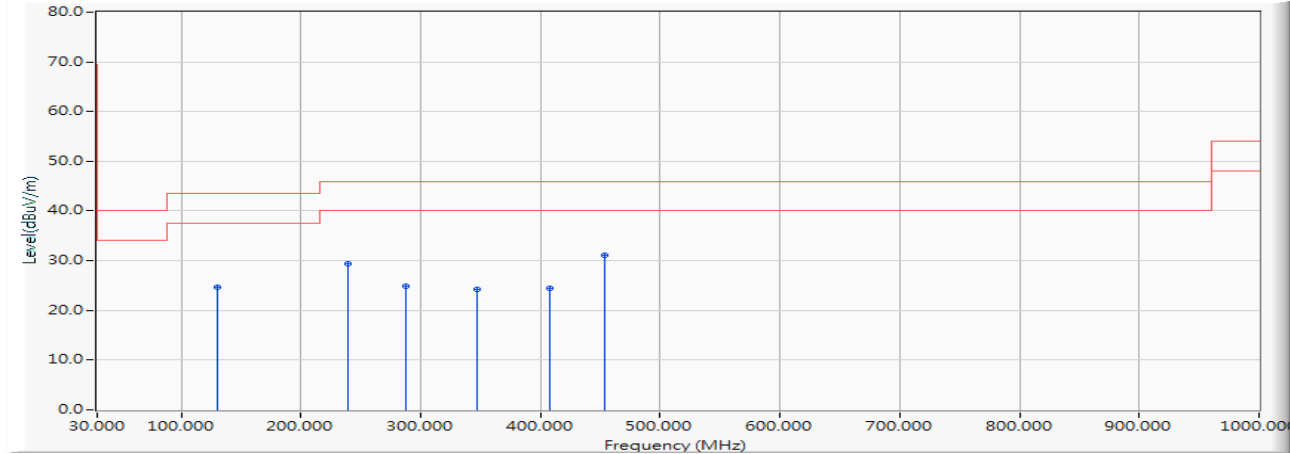Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		129.812	-12.400	37.105	24.705	-18.795	43.500	QUASIPeAK
2		239.464	-12.250	41.691	29.440	-16.560	46.000	QUASIPeAK
3		287.261	-10.727	35.608	24.881	-21.119	46.000	QUASIPeAK
4		347.710	-9.233	33.554	24.321	-21.679	46.000	QUASIPeAK
5		408.159	-7.834	32.289	24.455	-21.545	46.000	QUASIPeAK
6	*	453.145	-6.741	37.885	31.143	-14.857	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/04/08
 Test Mode : Mode 25: MIMO: Transmit (802.11ax-80BW_72.1Mbps) (5775MHz)

Horizontal

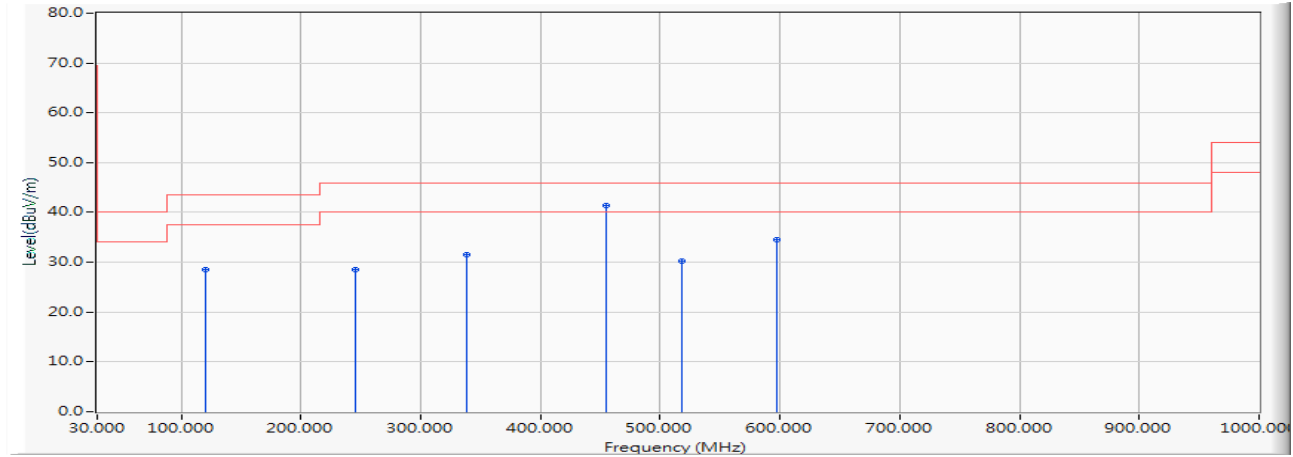


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		119.971	-13.432	41.978	28.546	-14.954	43.500	QUASIPeAK
2		245.087	-12.146	40.713	28.567	-17.433	46.000	QUASIPeAK
3		337.870	-9.461	41.079	31.618	-14.382	46.000	QUASIPeAK
4	*	454.551	-6.717	48.106	41.388	-4.612	46.000	QUASIPeAK
5		517.812	-5.679	35.951	30.272	-15.728	46.000	QUASIPeAK
6		597.942	-4.053	38.589	34.536	-11.464	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/04/08
 Test Mode : Mode 25: MIMO: Transmit (802.11ax-80BW_72.1Mbps) (5775MHz)

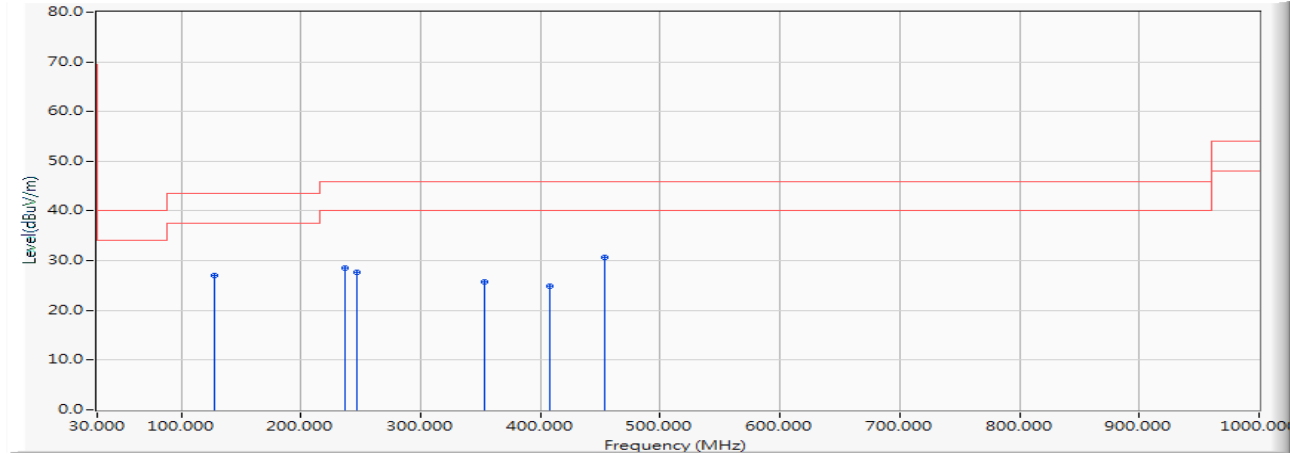Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		128.406	-12.547	39.649	27.101	-16.399	43.500	QUASIPeAK
2		236.652	-12.455	40.996	28.541	-17.459	46.000	QUASIPeAK
3		246.493	-12.128	39.888	27.760	-18.240	46.000	QUASIPeAK
4		353.333	-9.103	34.790	25.688	-20.312	46.000	QUASIPeAK
5		408.159	-7.834	32.720	24.886	-21.114	46.000	QUASIPeAK
6	*	453.145	-6.741	37.328	30.586	-15.414	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/04/08
 Test Mode : Mode 26: MIMO: Transmit (802.11ax-160BW_144.1Mbps) (5250MHz)

Horizontal

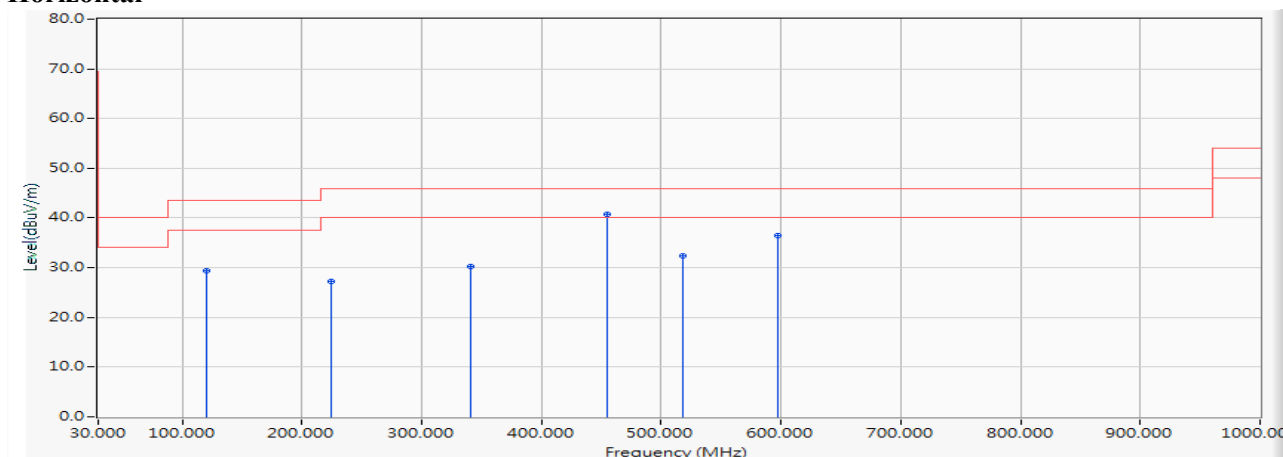


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		119.971	-13.432	42.740	29.308	-14.192	43.500	QUASIPeAK
2		224.000	-13.137	40.449	27.312	-18.688	46.000	QUASIPeAK
3		340.681	-9.396	39.621	30.226	-15.774	46.000	QUASIPeAK
4	*	454.551	-6.717	47.420	40.702	-5.298	46.000	QUASIPeAK
5		517.812	-5.679	38.162	32.483	-13.517	46.000	QUASIPeAK
6		597.942	-4.053	40.488	36.435	-9.565	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/04/08
 Test Mode : Mode 26: MIMO: Transmit (802.11ax-160BW_144.1Mbps) (5250MHz)

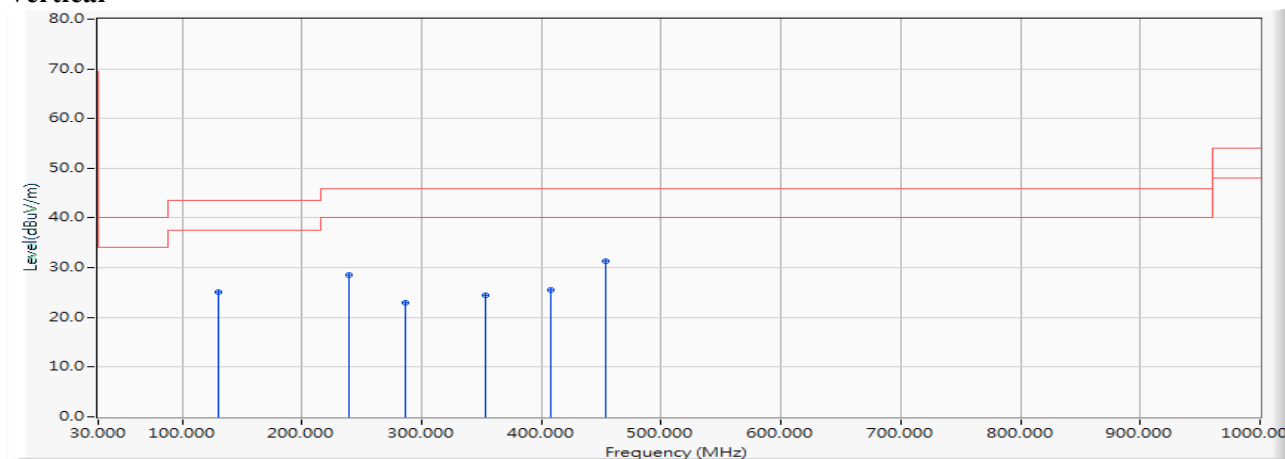Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		129.812	-12.400	37.446	25.046	-18.454	43.500	QUASIPeAK
2		239.464	-12.250	40.831	28.580	-17.420	46.000	QUASIPeAK
3		285.855	-10.759	33.771	23.013	-22.987	46.000	QUASIPeAK
4		353.333	-9.103	33.613	24.511	-21.489	46.000	QUASIPeAK
5		408.159	-7.834	33.313	25.479	-20.521	46.000	QUASIPeAK
6	*	453.145	-6.741	38.162	31.420	-14.580	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/04/08
 Test Mode : Mode 26: MIMO: Transmit (802.11ax-160BW_144.1Mbps) (5570MHz)

Horizontal

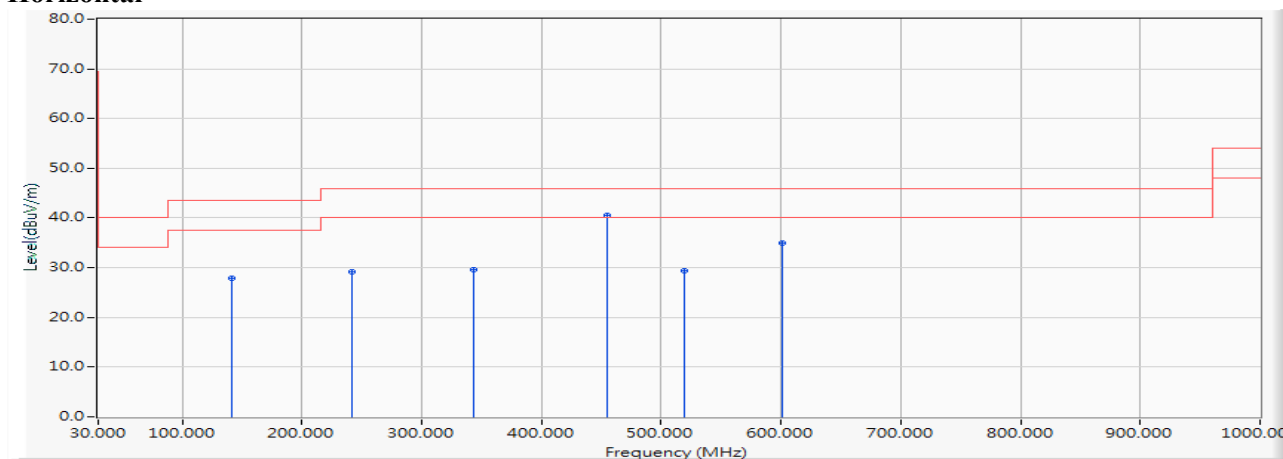


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		141.058	-11.394	39.370	27.976	-15.524	43.500	QUASIPeAK
2		242.275	-12.182	41.453	29.270	-16.730	46.000	QUASIPeAK
3		343.493	-9.331	38.962	29.631	-16.369	46.000	QUASIPeAK
4	*	454.551	-6.717	47.289	40.571	-5.429	46.000	QUASIPeAK
5		519.217	-5.656	34.969	29.312	-16.688	46.000	QUASIPeAK
6		600.754	-4.000	39.034	35.034	-10.966	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Intel® Wi-Fi 6 AX200
 Test Item : General Radiated Emission
 Test Date : 2019/04/08
 Test Mode : Mode 26: MIMO: Transmit (802.11ax-160BW_144.1Mbps) (5570MHz)

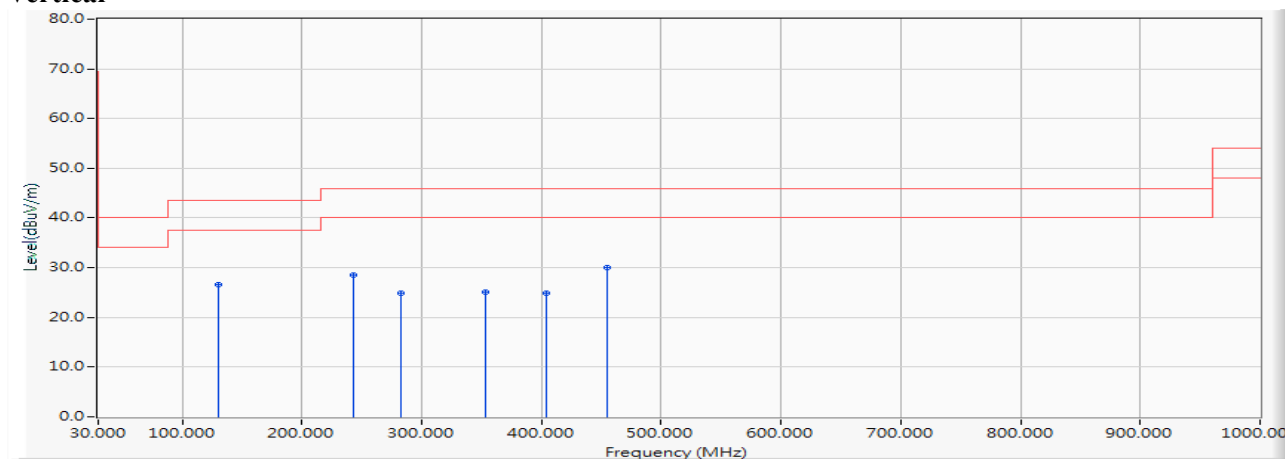Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		129.812	-12.400	39.023	26.623	-16.877	43.500	QUASIPeAK
2		243.681	-12.163	40.796	28.632	-17.368	46.000	QUASIPeAK
3		283.043	-10.822	35.782	24.959	-21.041	46.000	QUASIPeAK
4		353.333	-9.103	34.190	25.088	-20.912	46.000	QUASIPeAK
5		403.942	-7.938	32.851	24.912	-21.088	46.000	QUASIPeAK
6	*	454.551	-6.717	36.754	30.036	-15.964	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

4. Band Edge

4.1. Test Setup

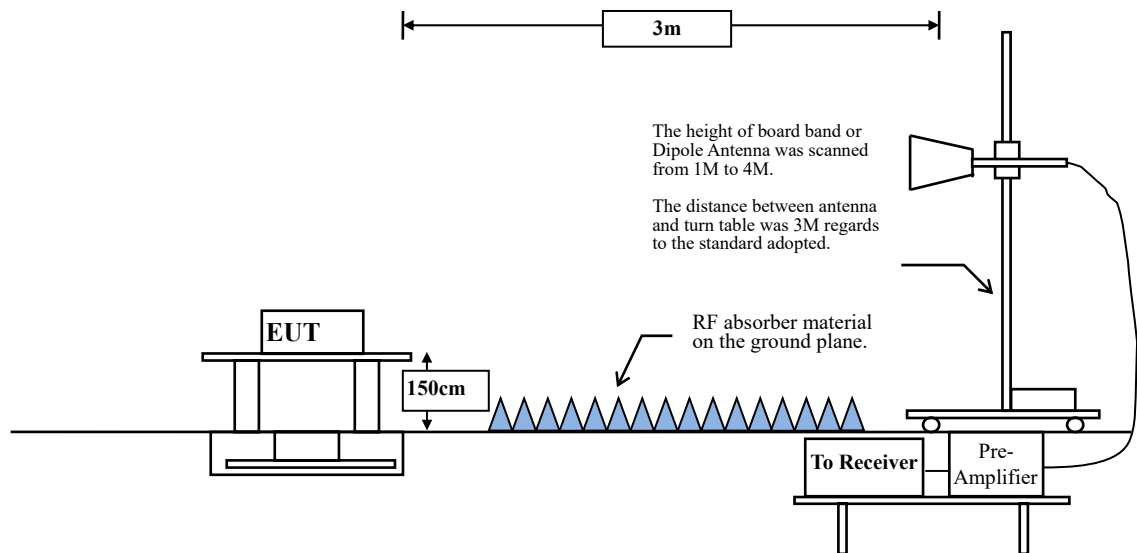

4.2. Limits

The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.

Radiated emissions which fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209:

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	uV/m @3m	dB μ V/m@3m
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

- Remarks :
1. RF Voltage (dB μ V) = 20 log RF Voltage (uV)
 2. In the Above Table, the tighter limit applies at the band edges.
 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

4.3. Test Procedure

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10:2013 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter is 120 kHz, above 1GHz are 1 MHz. The EUT was setup to ANSI C63.10, 2013; tested to UNII test procedure of FCC KDB-789033 for compliance to FCC 47CFR Subpart E requirements.

RBW and VBW Parameter setting:

According to KDB 789033 section II.G.5 Procedure for Unwanted Maximum Emissions Measurements above 1000 MHz.

RBW = 1MHz.

VBW $\geq$ 3MHz.

According to KDB 789033 section II.G.6 Procedures for Average Unwanted Emissions Measurements above 1000 MHz.

RBW = 1MHz.

VBW = 10Hz, when duty cycle $\geq$ 98 %

VBW $\geq$ 1/T, when duty cycle < 98 %

(T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.)

SISO A

5GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
802.11a	88.89	2.0870	479	500
802.11n20	98.96	--	--	10
802.11n40	98.56	--	--	10
802.11ac80	97.44	11.0145	91	100
802.11ac160	95.00	5.5072	182	200
802.11ax20	99.13	--	--	10
802.11ax40	98.47	--	--	10
802.11ax80	96.85	8.9130	112	200
802.11ax160	93.94	4.4928	223	300

Note: Duty Cycle Refer to Section 5

SISO B

5GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
802.11a	88.27	2.0725	483	500
802.11n20	98.84	--	--	10
802.11n40	98.56	--	--	10
802.11ac80	97.44	11.0145	91	100
802.11ac160	95.01	5.5217	181	200
802.11ax20	99.13	--	--	10
802.11ax40	98.47	--	--	10
802.11ax80	96.85	8.9130	112	200
802.11ax160	94.54	4.5217	221	300

Note: Duty Cycle Refer to Section 5

MIMO

5GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
802.11n20	99.00	--	--	10
802.11n40	96.41	8.9420	112	200
802.11ac80	94.96	5.4638	183	200
802.11ac160	90.95	2.7681	361	500
802.11ax20	98.47	--	--	10
802.11ax40	97.00	9.3623	107	200
802.11ax80	93.92	4.4783	223	300
802.11ax160	89.21	2.2754	439	500

Note: Duty Cycle Refer to Section 5

4.4. Uncertainty


Horizontal polarization : 1-18GHz: ± 3.77 dB

Vertical polarization : 1-18GHz : ± 3.83 dB

4.5. Test Result of Band Edge

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 36 (5180MHz)

Horizontal

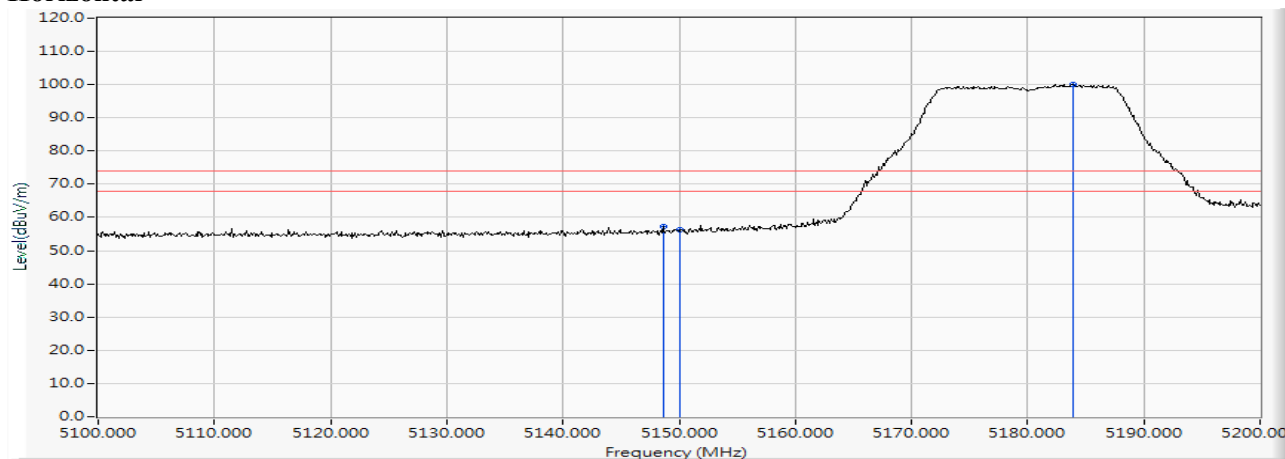


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5148.600	15.299	41.927	57.226	-16.774	74.000	PEAK
2		5150.000	15.307	40.922	56.229	-17.771	74.000	PEAK
3	*	5183.900	15.410	84.729	100.138	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 36 (5180MHz)

Horizontal

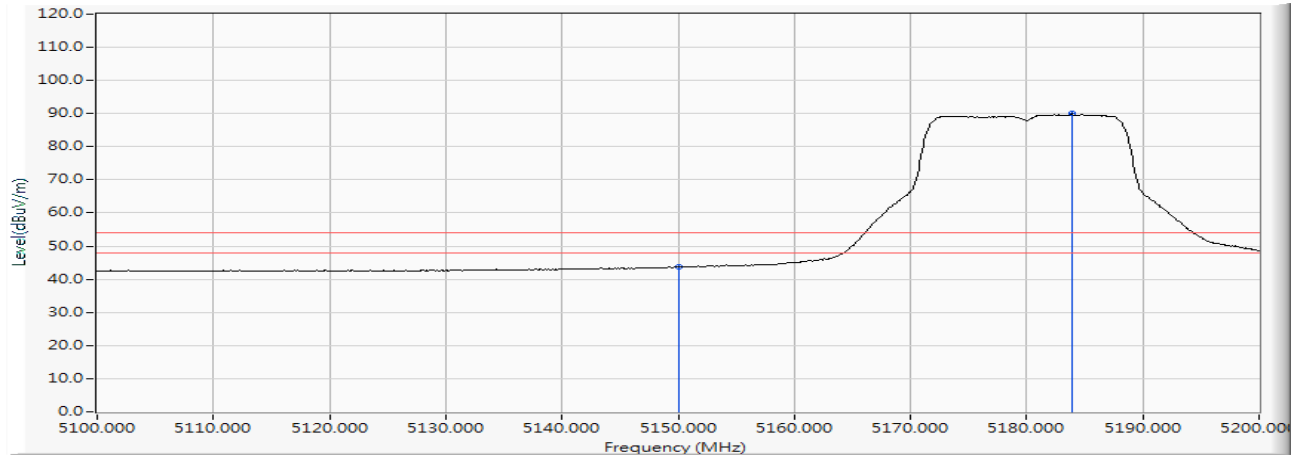


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	28.335	43.642	-10.358	54.000	AVERAGE
2	*	5183.900	15.410	74.600	90.009	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 36 (5180MHz)

Vertical

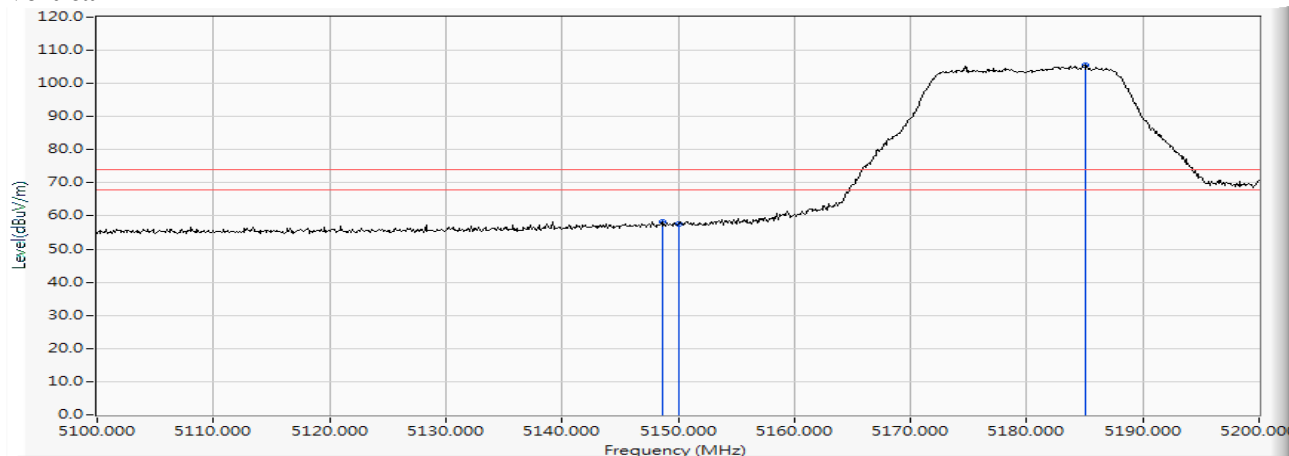


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5148.600	15.299	42.982	58.281	-15.719	74.000	PEAK
2		5150.000	15.307	42.440	57.747	-16.253	74.000	PEAK
3	*	5185.000	15.415	90.016	105.430	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 36 (5180MHz)

Vertical

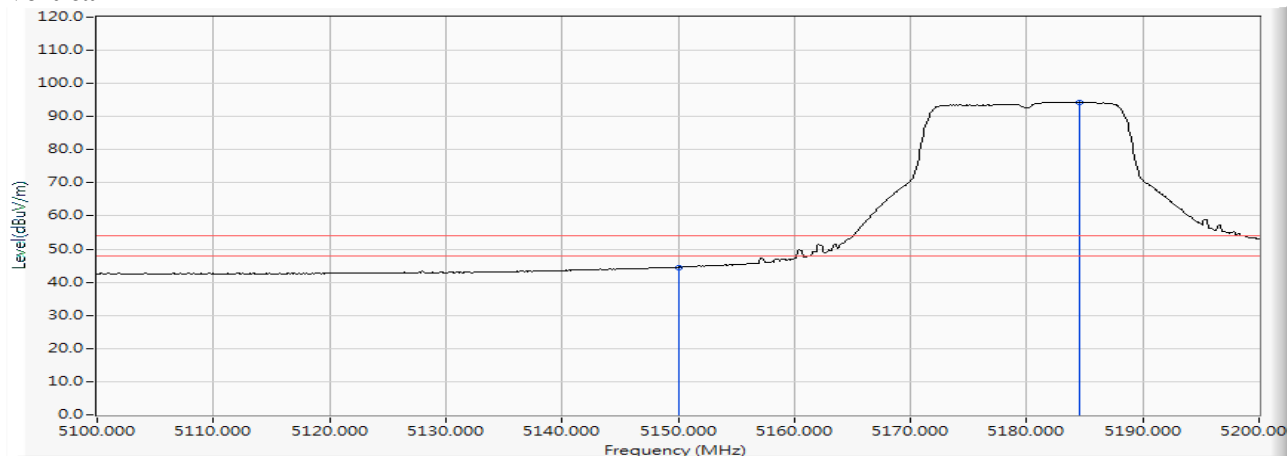


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	29.234	44.541	-9.459	54.000	AVERAGE
2	*	5184.600	15.412	78.965	94.378	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 64 (5320MHz)

Horizontal

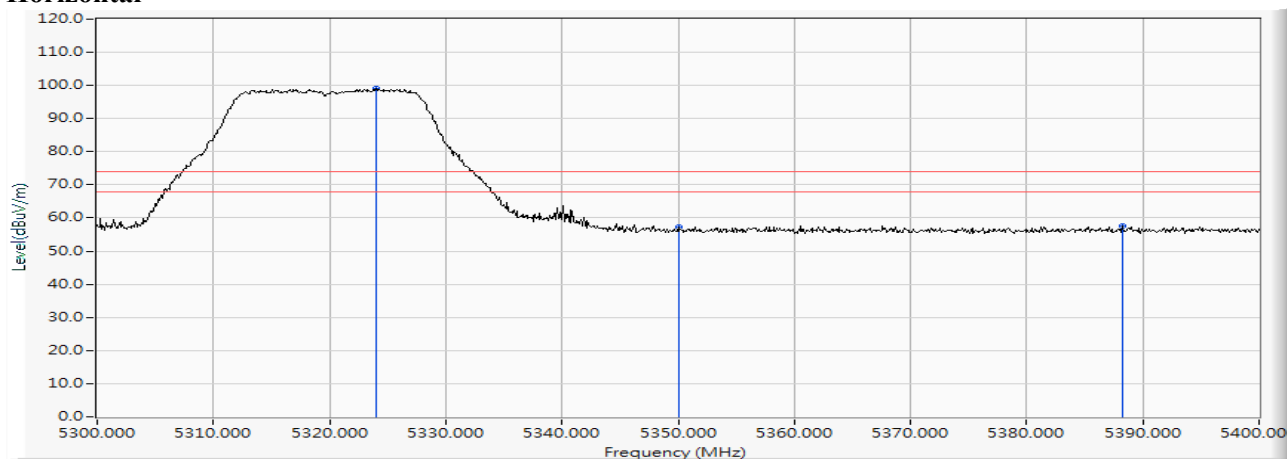


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5324.000	15.863	83.133	98.996	--	--	PEAK
2		5350.000	15.912	41.198	57.110	-16.890	74.000	PEAK
3		5388.200	16.016	41.603	57.620	-16.380	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 64 (5320MHz)

Horizontal

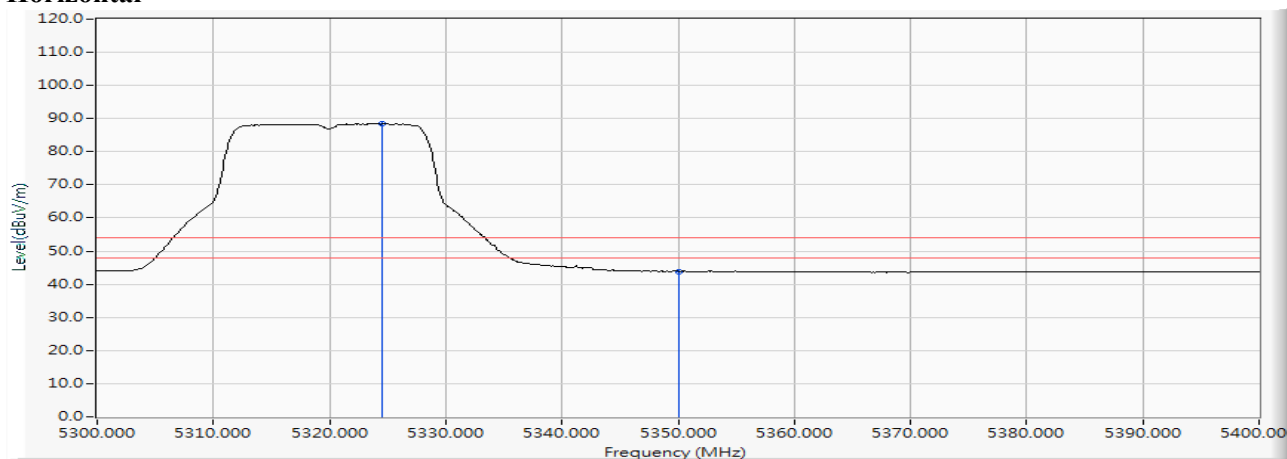


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5324.500	15.864	72.645	88.509	--	--	AVERAGE
2		5350.000	15.912	27.926	43.838	-10.162	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 64 (5320MHz)

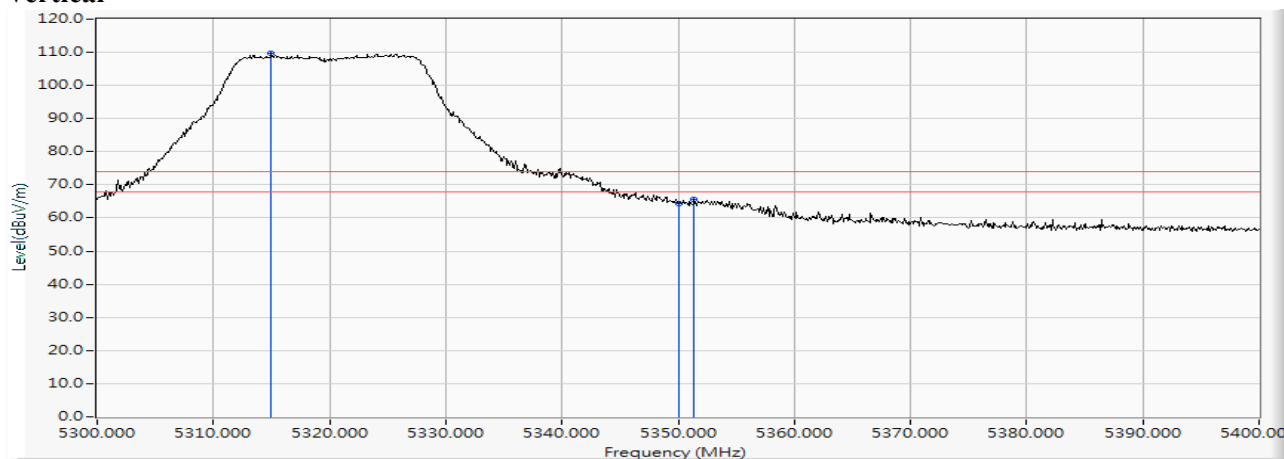
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5315.000	15.834	93.882	109.716	--	--	PEAK
2		5350.000	15.912	48.302	64.214	-9.786	74.000	PEAK
3		5351.400	15.917	49.583	65.500	-8.500	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 64 (5320MHz)

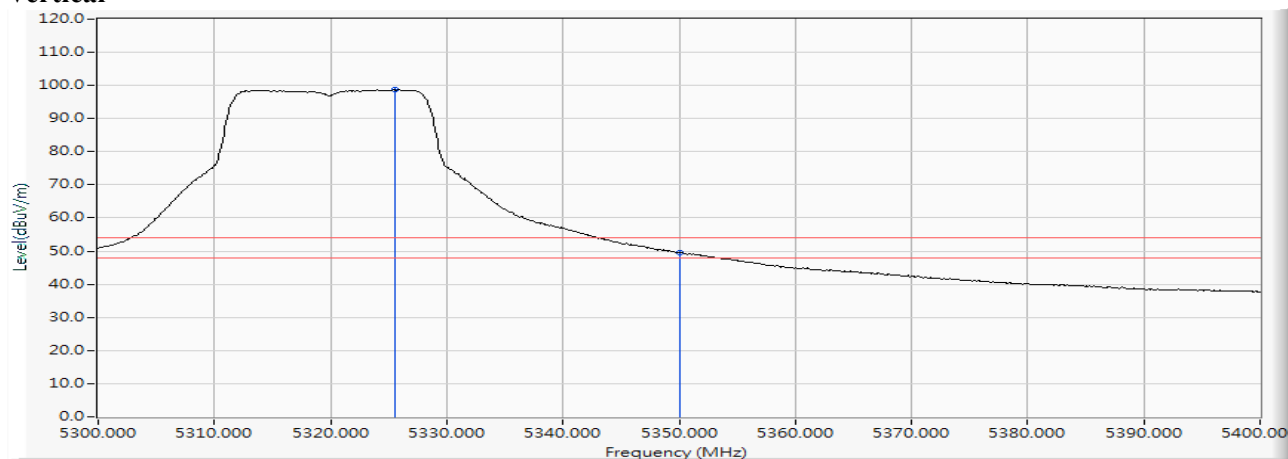Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5325.500	15.868	82.837	98.704	--	--	AVERAGE
2		5350.000	15.912	33.695	49.607	-4.393	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 100 (5500MHz)

Horizontal

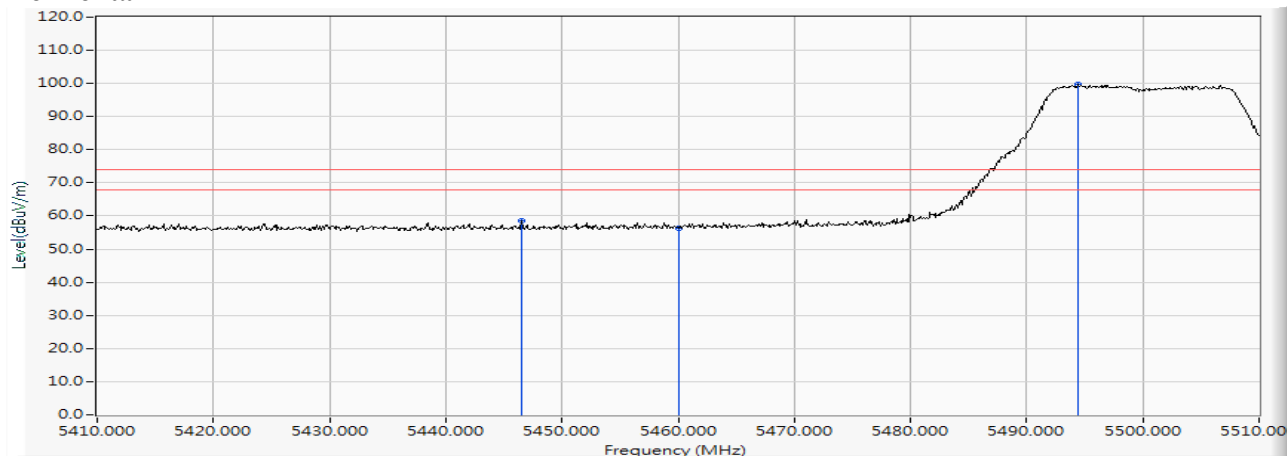


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5446.500	16.146	42.557	58.703	-15.297	74.000	PEAK
2		5460.000	16.185	40.125	56.310	-17.690	74.000	PEAK
3	*	5494.400	16.262	83.556	99.819	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 100 (5500MHz)

Horizontal

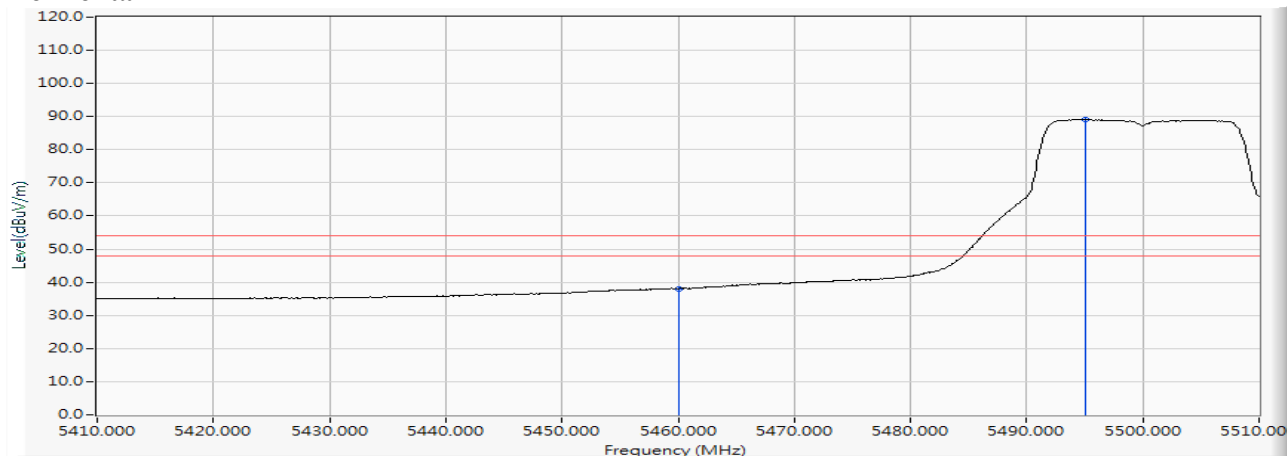


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5460.000	16.185	21.805	37.990	-16.010	54.000	AVERAGE
2	*	5495.000	16.263	72.897	89.161	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 100 (5500MHz)

Vertical

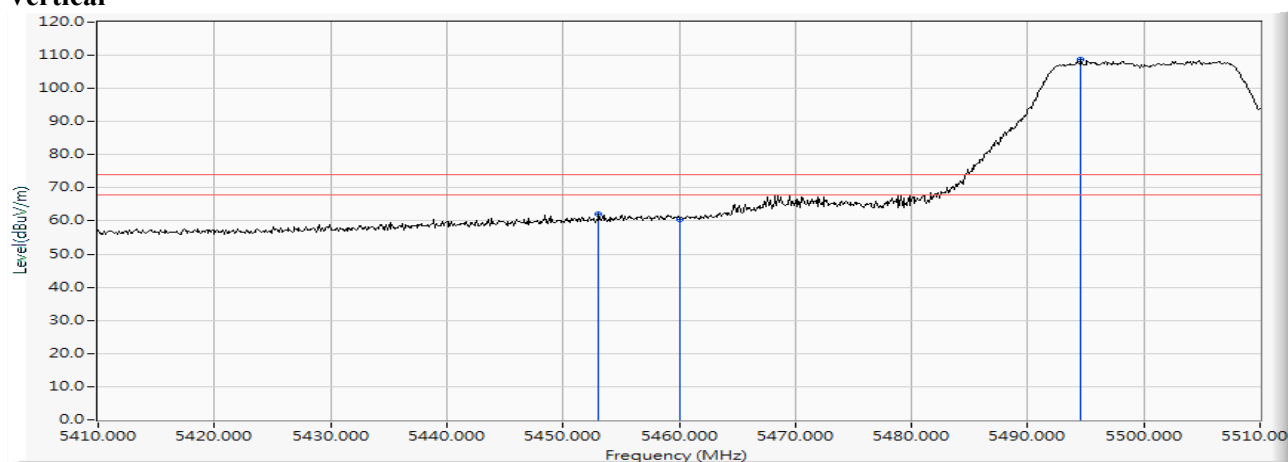


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5453.100	16.167	45.782	61.949	-12.051	74.000	PEAK
2		5460.000	16.185	44.312	60.497	-13.503	74.000	PEAK
3	*	5494.600	16.262	92.556	108.819	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 100 (5500MHz)

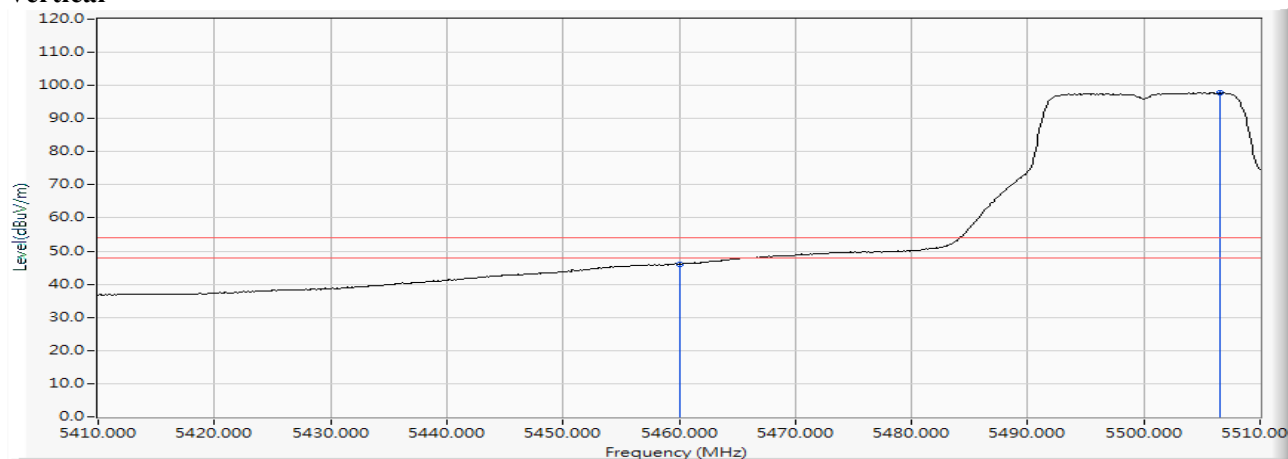Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5460.000	16.185	29.937	46.122	-7.878	54.000	AVERAGE
2	*	5506.500	16.273	81.528	97.801	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 100 (5500MHz)


Horizontal

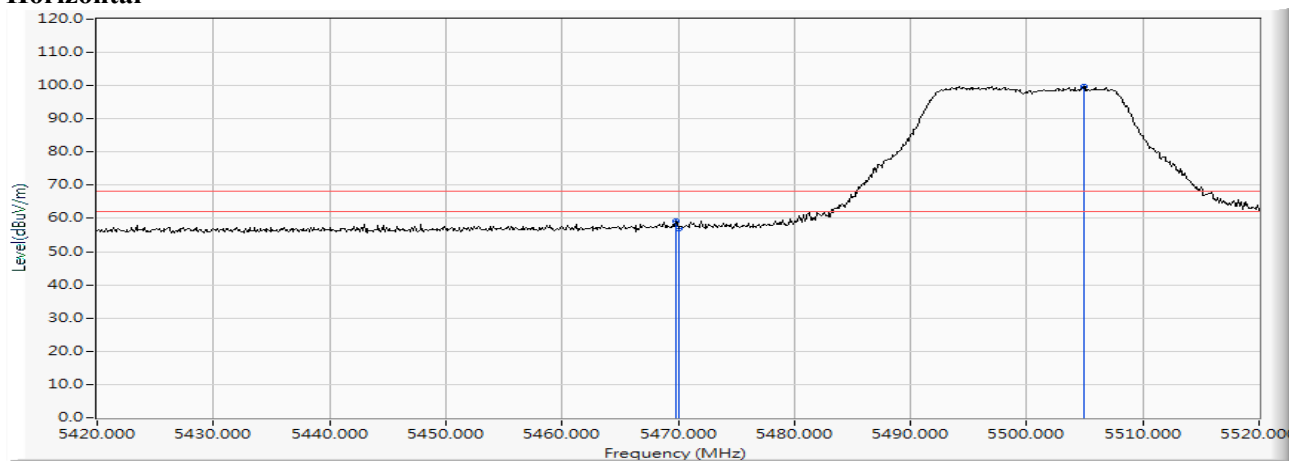

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5469.800	16.200	42.964	59.163	-9.057	68.220	PEAK
2		5470.000	16.200	40.809	57.009	-11.211	68.220	PEAK
3	*	5504.900	16.273	83.531	99.804	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 100 (5500MHz)


Vertical

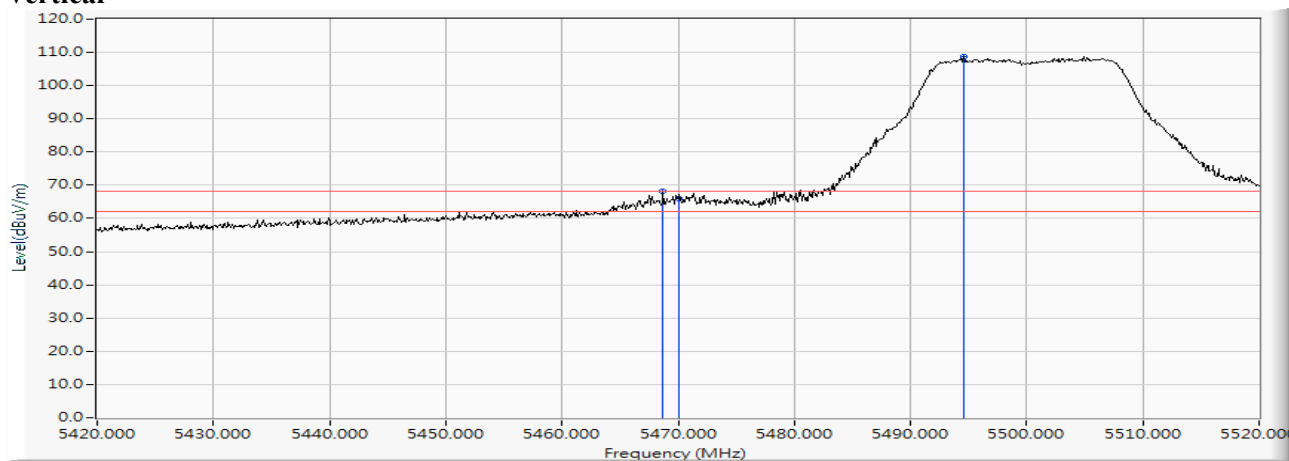

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5468.700	16.197	51.899	68.097	-0.123	68.220	PEAK
2		5470.000	16.200	49.862	66.062	-2.158	68.220	PEAK
3	*	5494.600	16.262	92.568	108.831	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 140 (5700MHz)


Horizontal

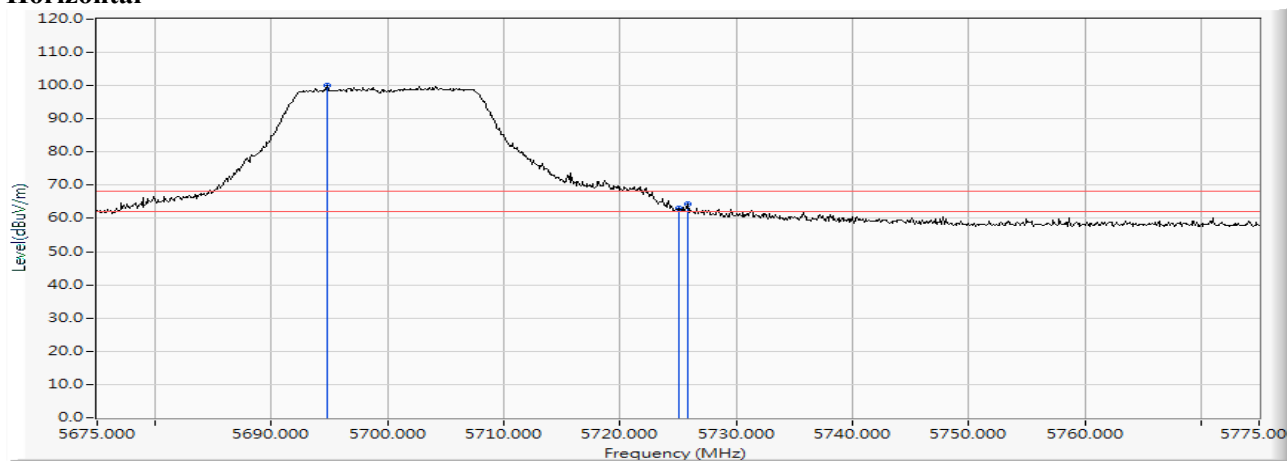

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5694.800	16.494	83.406	99.901	--	--	PEAK
2		5725.000	16.544	46.590	63.134	-5.086	68.220	PEAK
3		5725.800	16.546	47.887	64.433	-3.787	68.220	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 140 (5700MHz)


Vertical

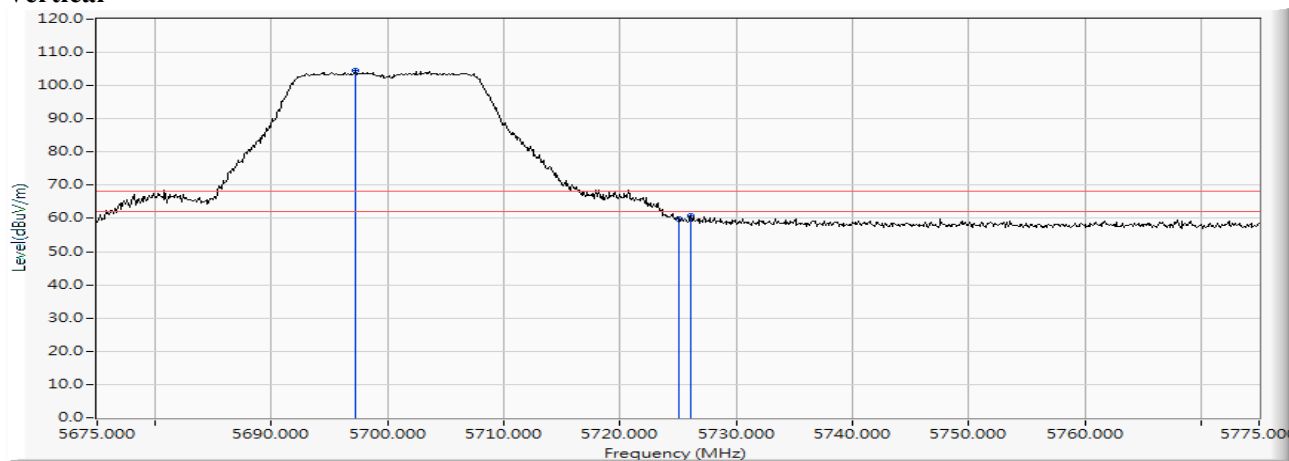

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5697.200	16.498	88.054	104.552	--	--	PEAK
2		5725.000	16.544	43.411	59.955	-8.265	68.220	PEAK
3		5726.100	16.546	44.124	60.670	-7.550	68.220	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 149 (5745MHz)


Horizontal

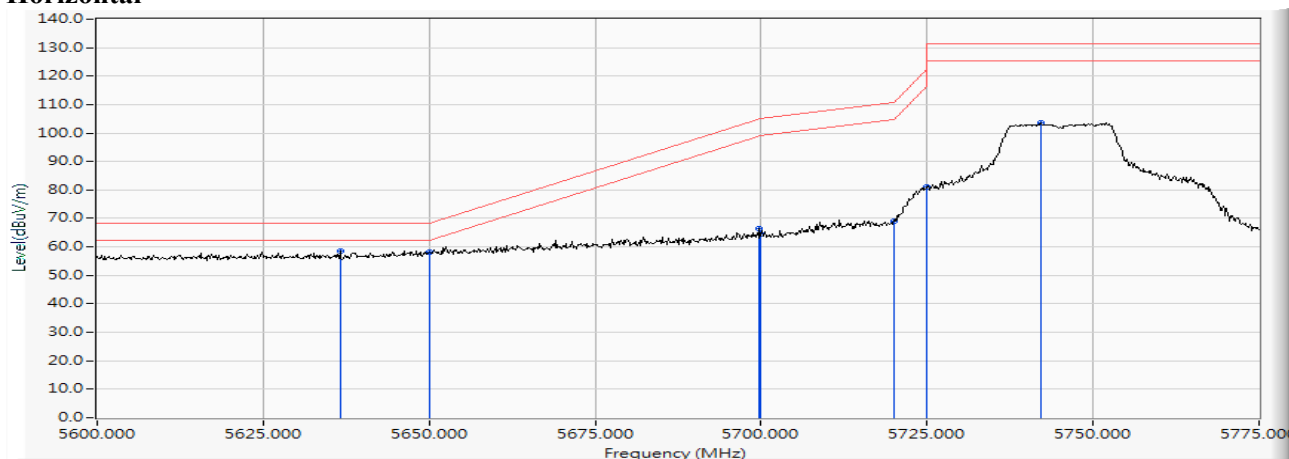

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5636.575	16.410	42.177	58.588	-9.632	68.220	PEAK
2		5650.000	16.447	41.630	58.077	-10.143	68.220	PEAK
3		5699.750	16.502	49.793	66.294	-38.721	105.015	PEAK
4		5700.000	16.502	47.950	64.452	-40.748	105.200	PEAK
5		5720.000	16.535	52.396	68.931	-41.869	110.800	PEAK
6		5725.000	16.544	64.416	80.960	-41.240	122.200	PEAK
7	*	5742.100	16.557	87.064	103.621	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 149 (5745MHz)


Vertical

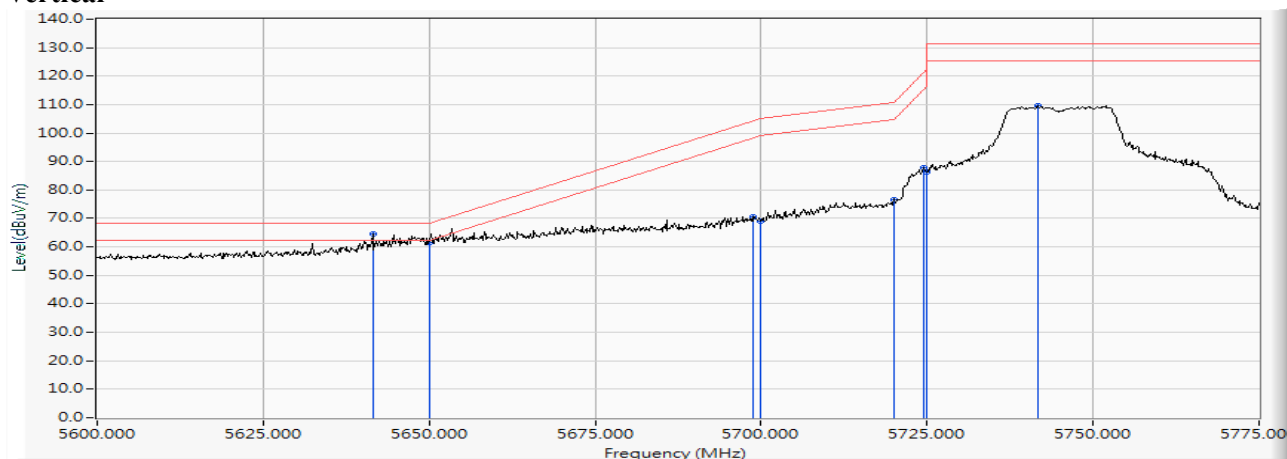

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5641.475	16.424	48.181	64.605	-3.615	68.220	PEAK
2		5650.000	16.447	45.236	61.683	-6.537	68.220	PEAK
3		5698.700	16.500	54.160	70.660	-33.579	104.239	PEAK
4		5700.000	16.502	52.625	69.127	-36.073	105.200	PEAK
5		5720.000	16.535	59.887	76.422	-34.378	110.800	PEAK
6		5724.600	16.544	71.295	87.838	-33.450	121.288	PEAK
7		5725.000	16.544	69.766	86.310	-35.890	122.200	PEAK
8	*	5741.750	16.556	93.037	109.594	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 165 (5825MHz)


Horizontal

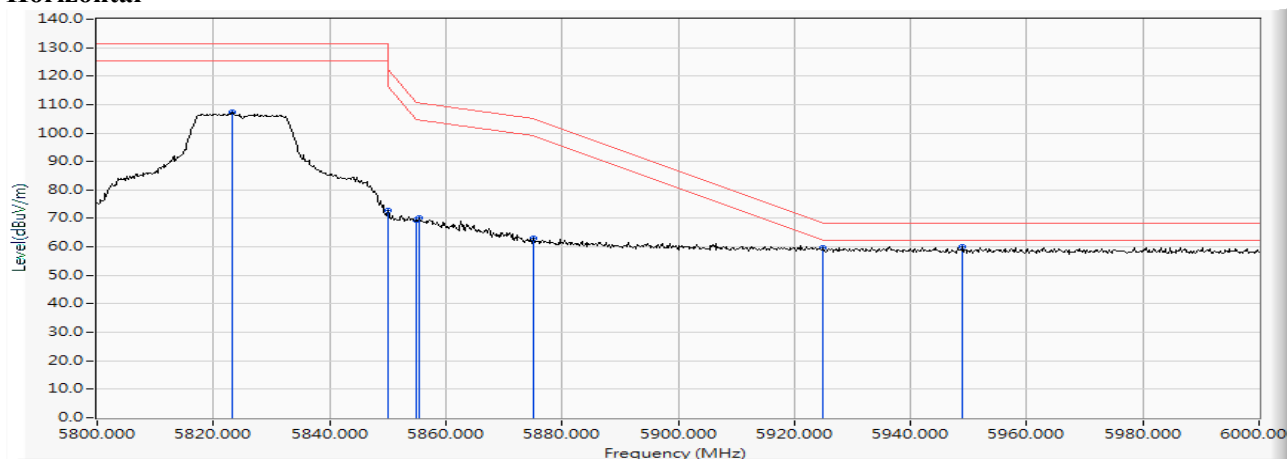

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5823.200	16.709	90.485	107.194	--	--	PEAK
2		5850.000	16.748	56.144	72.892	-49.308	122.200	PEAK
3		5855.000	16.758	52.650	69.408	-41.392	110.800	PEAK
4		5855.400	16.760	53.496	70.255	-40.433	110.688	PEAK
5		5875.000	16.807	46.086	62.894	-42.306	105.200	PEAK
6		5925.000	16.920	42.734	59.654	-8.546	68.200	PEAK
7		5949.000	16.951	43.051	60.003	-8.197	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 1 SISO A: Transmit (802.11a_6Mbps)-Channel 165 (5825MHz)


Vertical

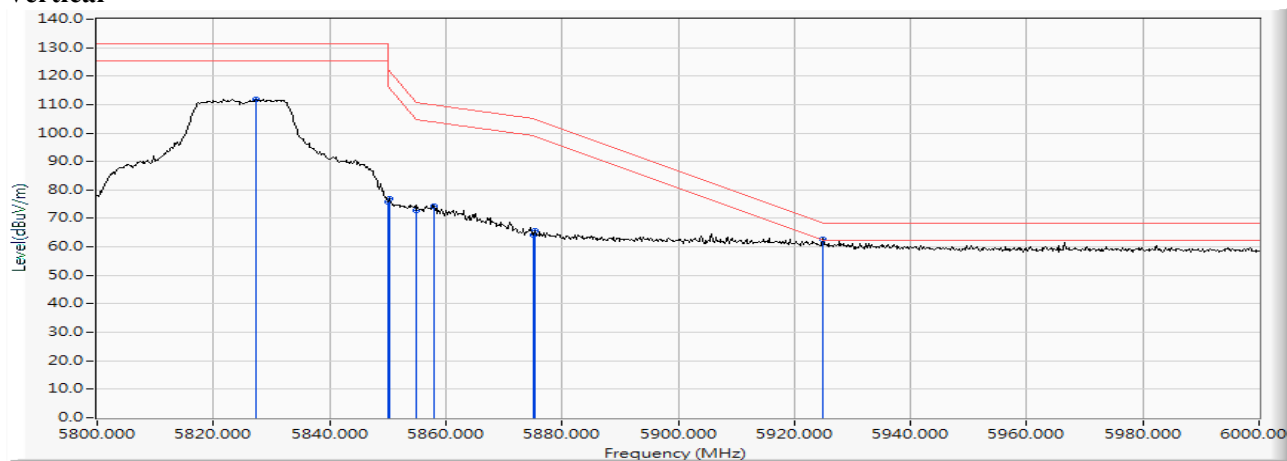

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5827.400	16.715	95.027	111.742	--	--	PEAK
2		5850.000	16.748	59.122	75.870	-46.330	122.200	PEAK
3		5850.200	16.748	60.160	76.909	-44.835	121.744	PEAK
4		5855.000	16.758	56.082	72.840	-37.960	110.800	PEAK
5		5858.000	16.766	57.732	74.497	-35.463	109.960	PEAK
6		5875.000	16.807	47.475	64.283	-40.917	105.200	PEAK
7		5875.400	16.809	48.961	65.770	-39.134	104.904	PEAK
8		5925.000	16.920	45.836	62.756	-5.444	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 36 (5180MHz)

Horizontal

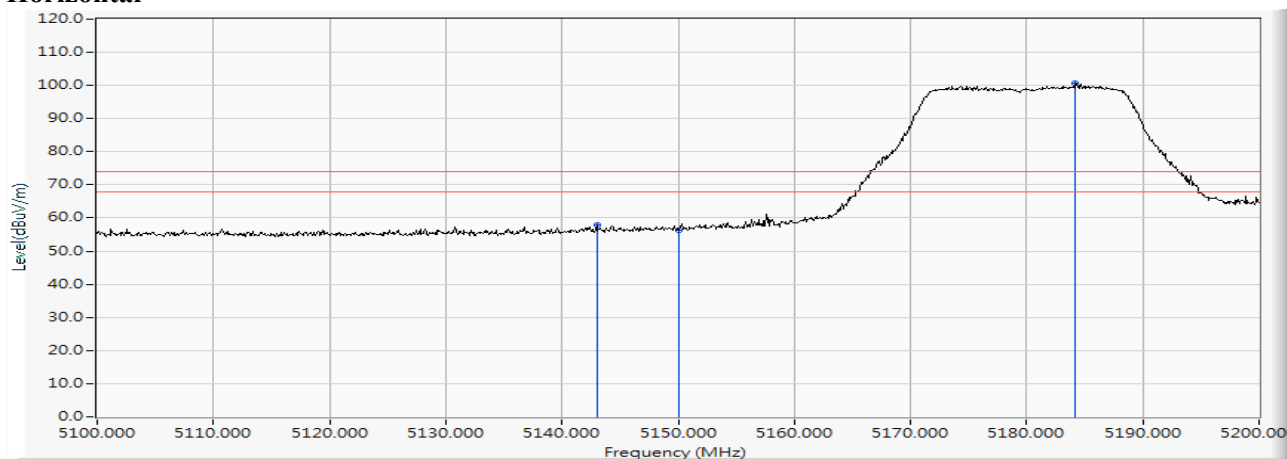


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5143.000	15.267	42.514	57.781	-16.219	74.000	PEAK
2		5150.000	15.307	41.058	56.365	-17.635	74.000	PEAK
3	*	5184.200	15.410	85.155	100.566	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 36 (5180MHz)

Horizontal

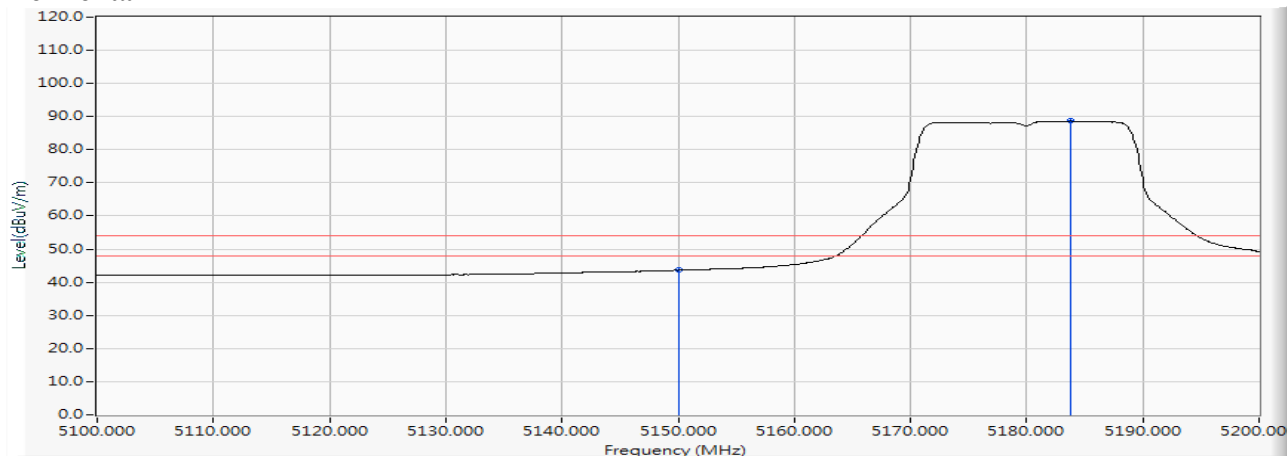


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	28.306	43.613	-10.387	54.000	AVERAGE
2	*	5183.800	15.409	73.244	88.653	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 36 (5180MHz)

Vertical

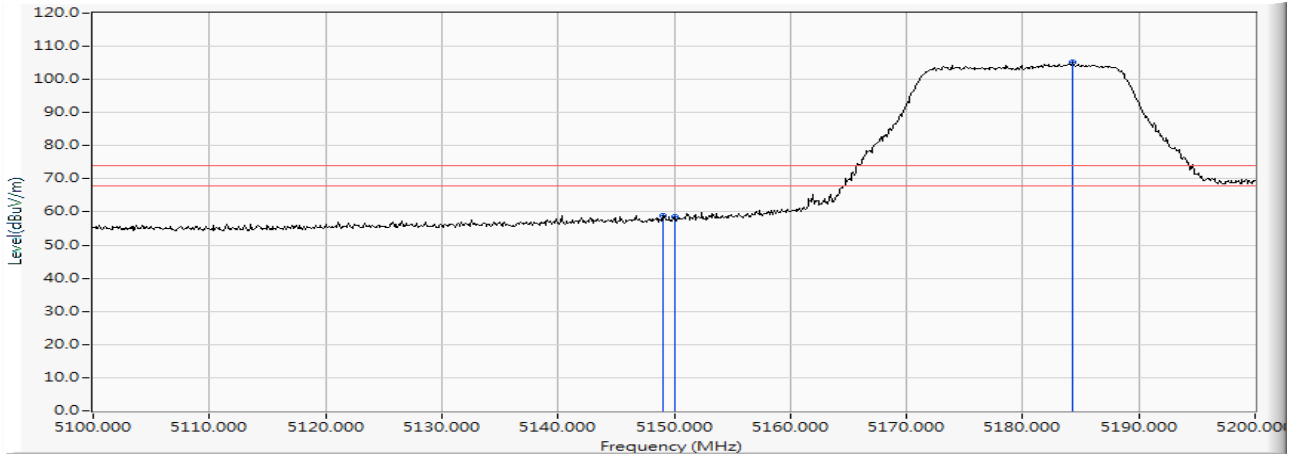


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5149.000	15.302	43.682	58.983	-15.017	74.000	PEAK
2		5150.000	15.307	43.317	58.624	-15.376	74.000	PEAK
3	*	5184.300	15.412	89.676	105.087	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 36 (5180MHz)

Vertical

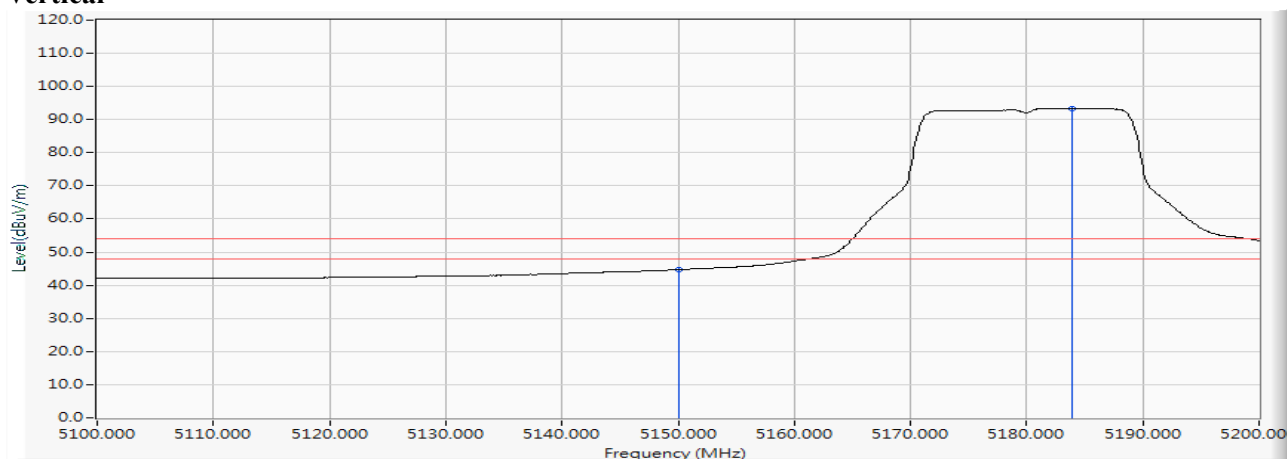


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	29.388	44.695	-9.305	54.000	AVERAGE
2	*	5183.900	15.410	78.035	93.444	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 64 (5320MHz)

Horizontal

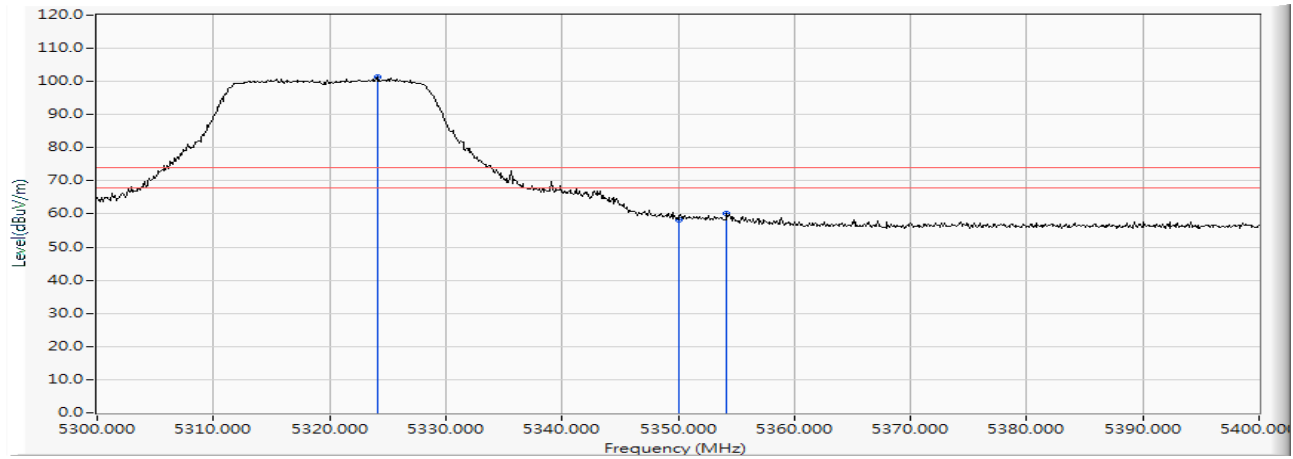


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5324.200	15.863	85.361	101.224	--	--	PEAK
2		5350.000	15.912	42.443	58.355	-15.645	74.000	PEAK
3		5354.200	15.925	44.197	60.122	-13.878	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 64 (5320MHz)

Horizontal

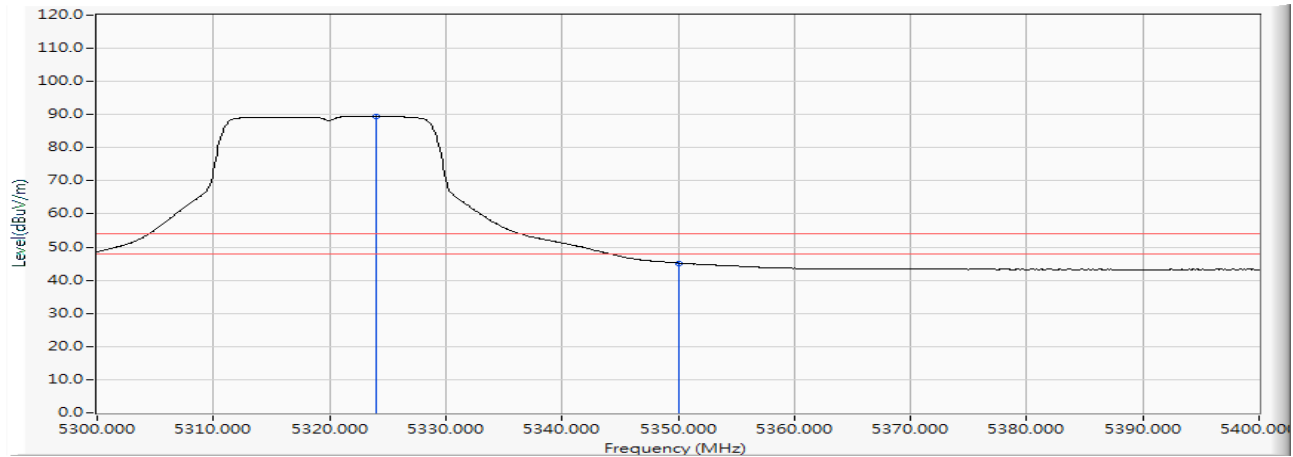


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5324.000	15.863	73.616	89.479	--	--	AVERAGE
2		5350.000	15.912	29.286	45.198	-8.802	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 64 (5320MHz)

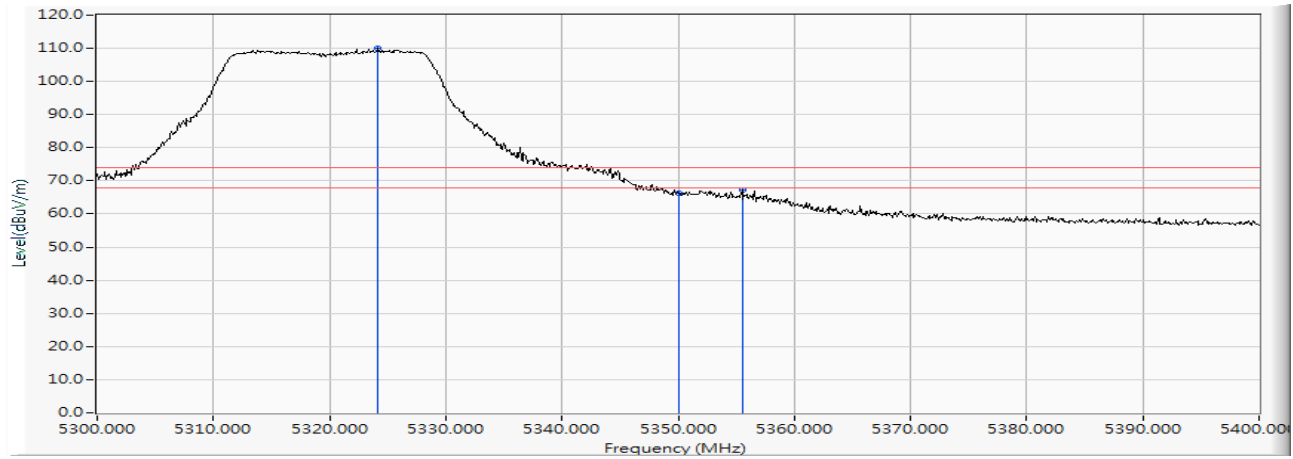
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5324.200	15.863	94.120	109.983	--	--	PEAK
2		5350.000	15.912	50.419	66.331	-7.669	74.000	PEAK
3		5355.500	15.930	51.446	67.375	-6.625	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 64 (5320MHz)

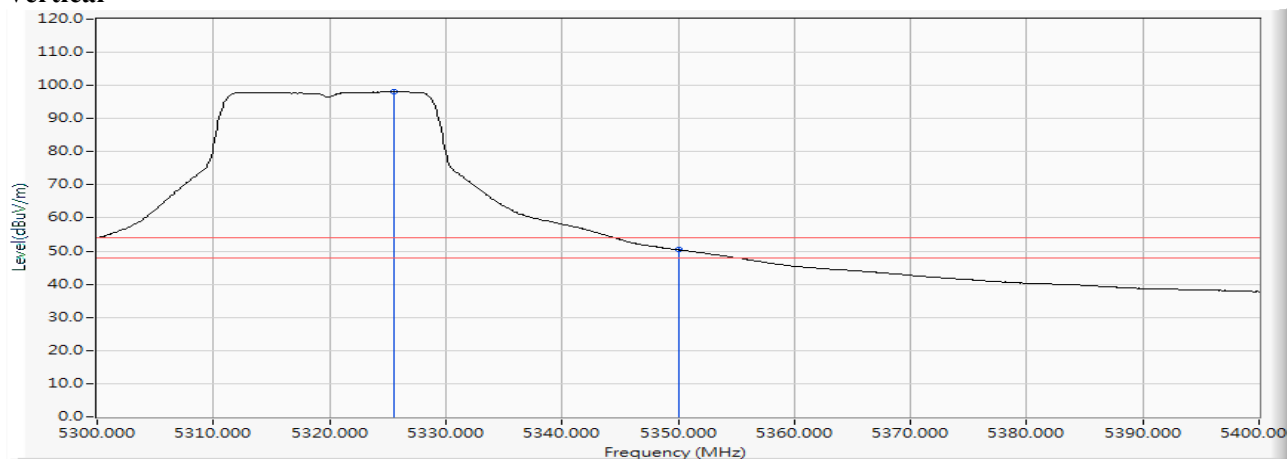Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5325.500	15.868	82.203	98.070	--	--	AVERAGE
2		5350.000	15.912	34.445	50.357	-3.643	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 100 (5500MHz)

Horizontal

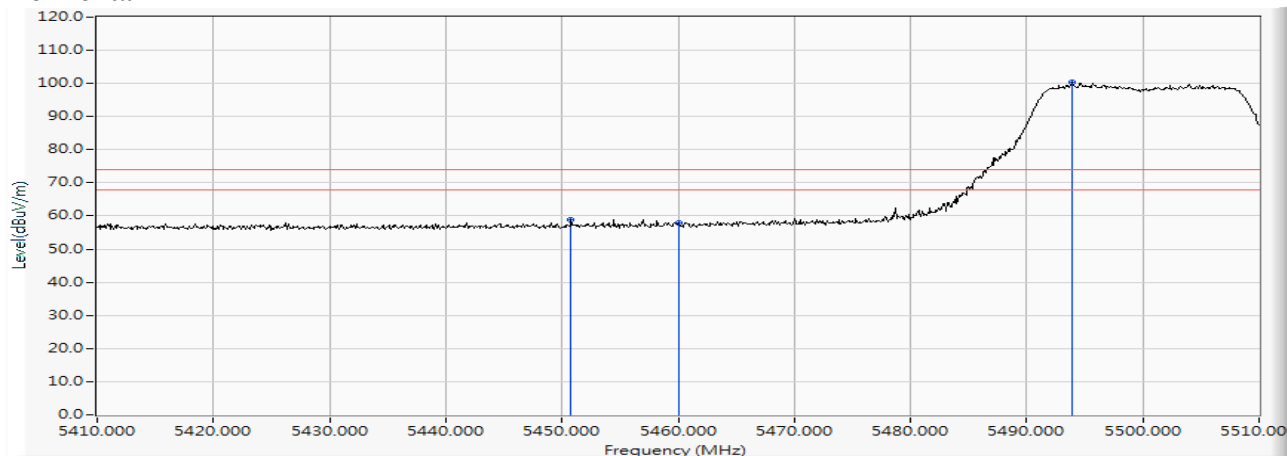


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5450.800	16.160	42.740	58.900	-15.100	74.000	PEAK
2		5460.000	16.185	41.723	57.908	-16.092	74.000	PEAK
3	*	5493.900	16.262	84.042	100.304	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 100 (5500MHz)

Horizontal

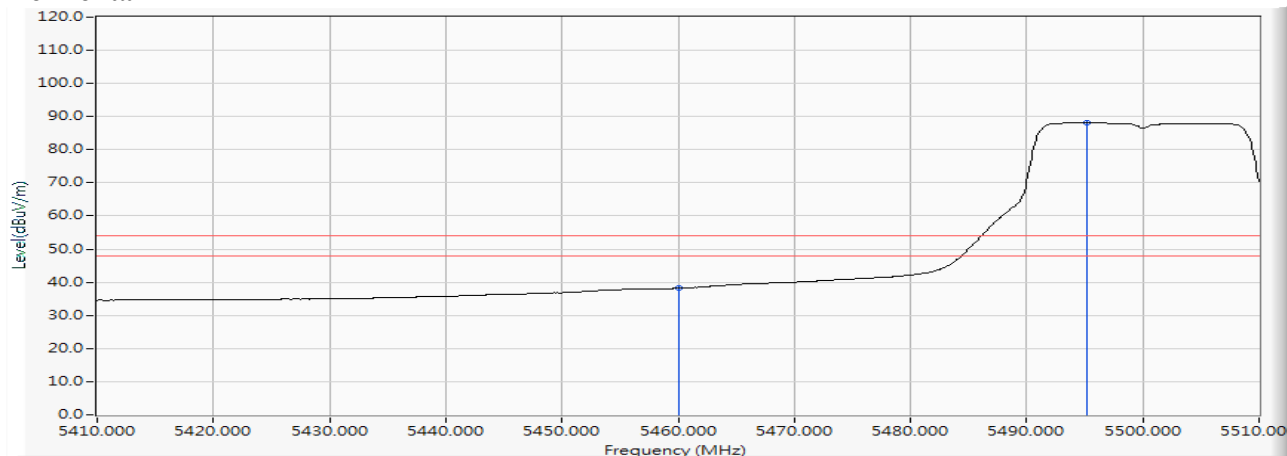


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5460.000	16.185	21.978	38.163	-15.837	54.000	AVERAGE
2	*	5495.200	16.264	71.915	88.179	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 100 (5500MHz)

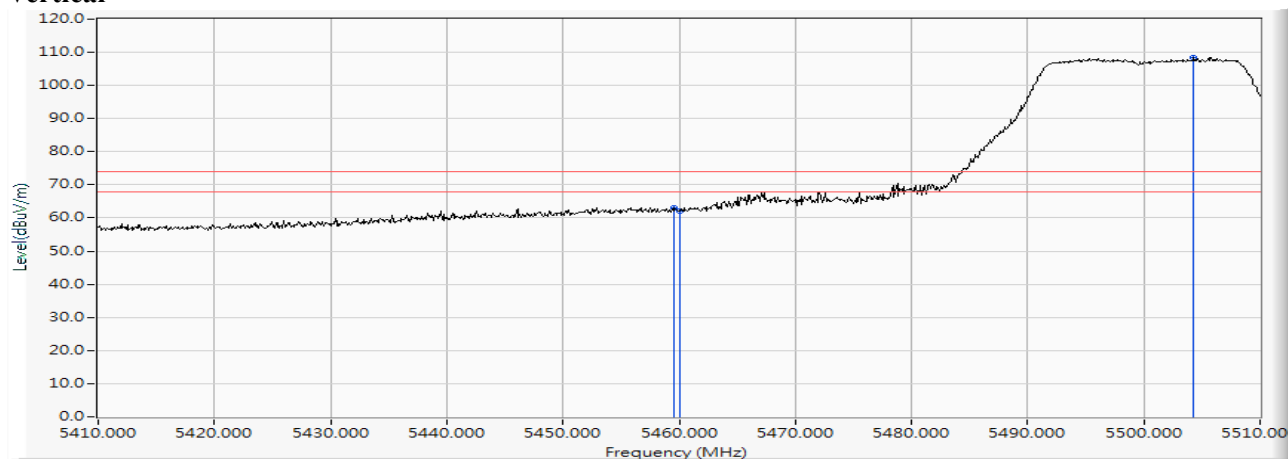
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5459.600	16.184	46.844	63.028	-10.972	74.000	PEAK
2		5460.000	16.185	45.925	62.110	-11.890	74.000	PEAK
3	*	5504.300	16.273	92.271	108.544	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 100 (5500MHz)

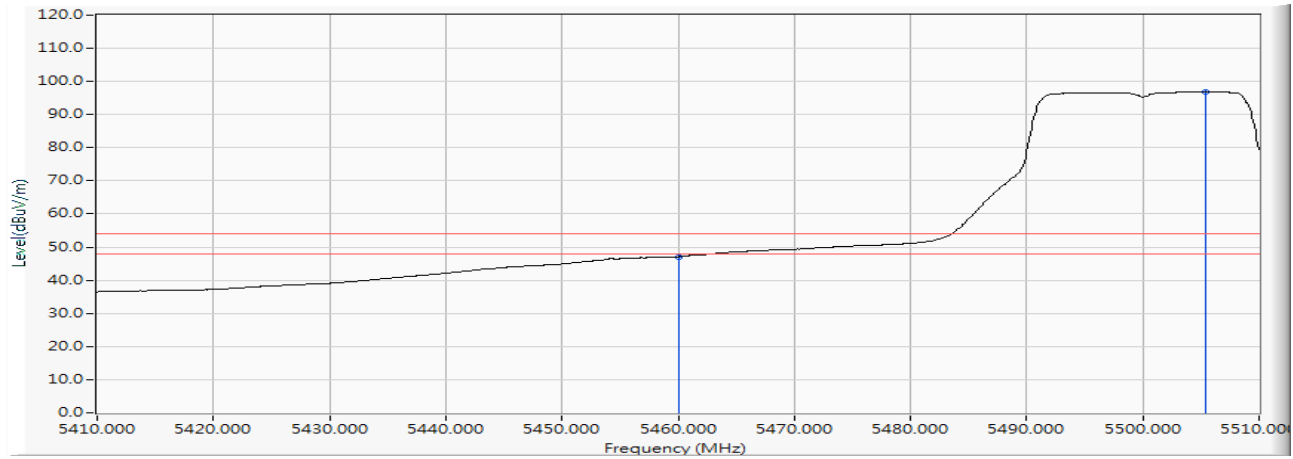Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5460.000	16.185	30.917	47.102	-6.898	54.000	AVERAGE
2	*	5505.400	16.272	80.619	96.892	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 100 (5500MHz)

Horizontal

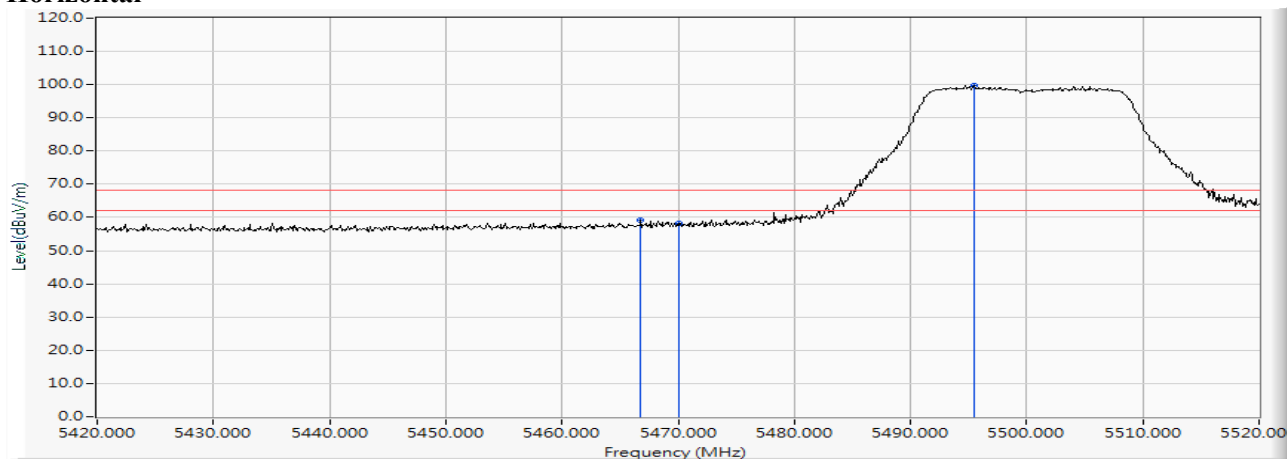

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5466.800	16.195	43.008	59.203	-9.017	68.220	PEAK
2		5470.000	16.200	41.886	58.086	-10.134	68.220	PEAK
3	*	5495.500	16.265	83.545	99.809	--	--	PEAK


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 100 (5500MHz)

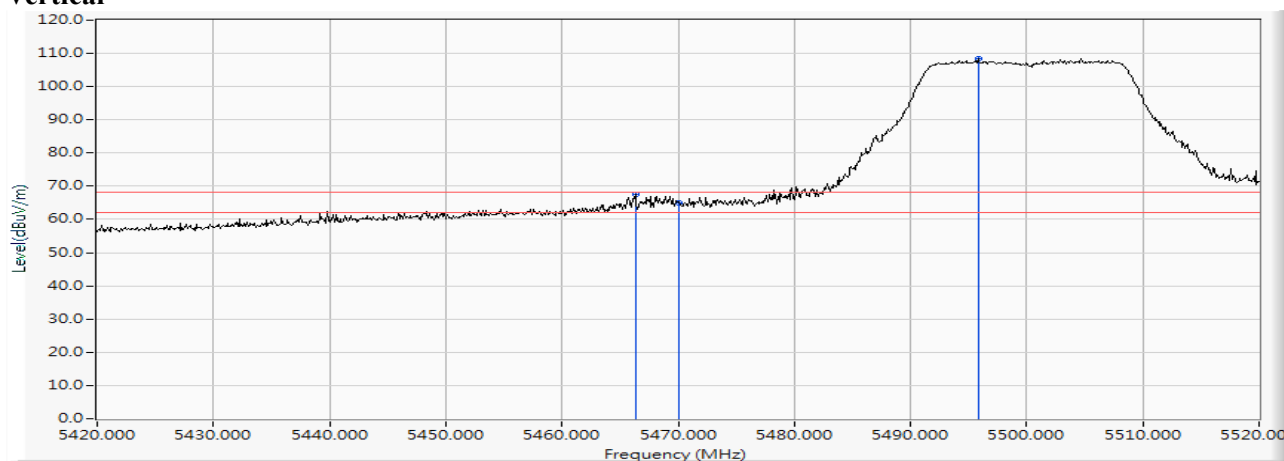Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5466.300	16.194	51.444	67.638	-0.582	68.220	PEAK
2		5470.000	16.200	48.855	65.055	-3.165	68.220	PEAK
3	*	5495.800	16.265	92.089	108.354	--	--	PEAK


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 140 (5700MHz)

Horizontal

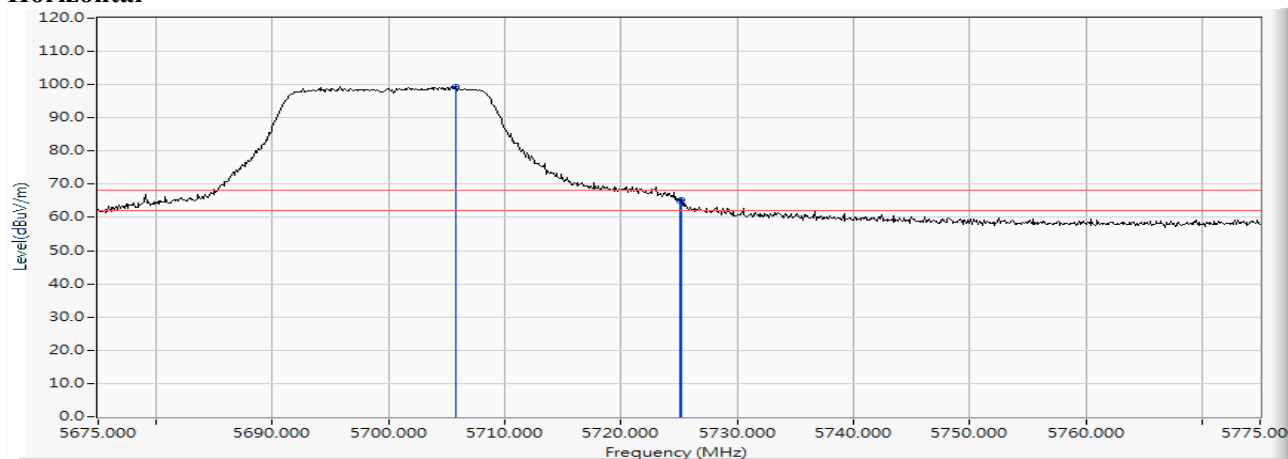

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5705.800	16.509	82.855	99.364	--	--	PEAK
2		5725.000	16.544	48.416	64.960	-3.260	68.220	PEAK
3		5725.200	16.544	48.815	65.360	-2.860	68.220	PEAK


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 140 (5700MHz)

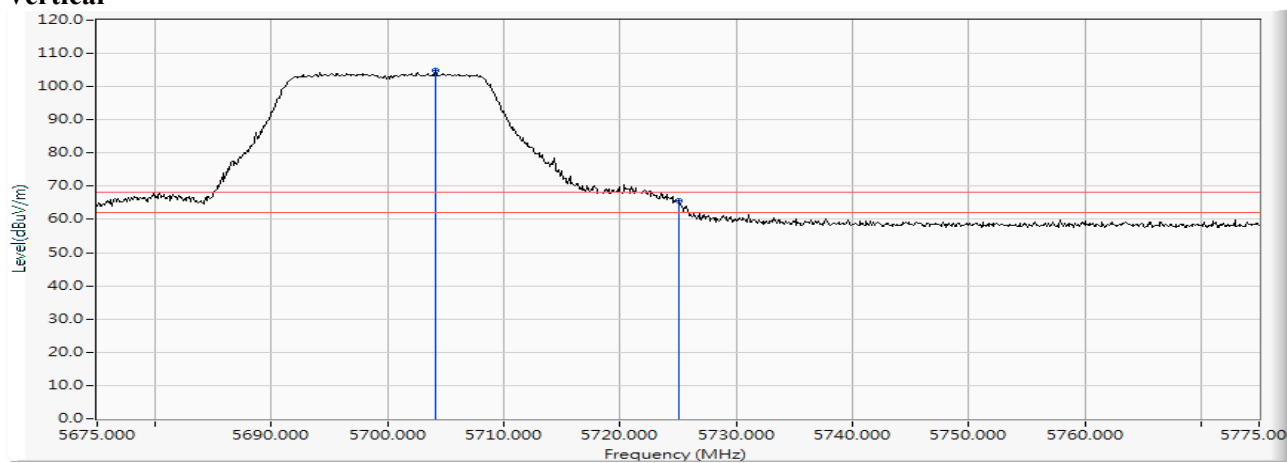Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5704.100	16.507	88.298	104.805	--	--	PEAK
2		5725.000	16.544	48.929	65.473	-2.747	68.220	PEAK


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 149 (5745MHz)

Horizontal

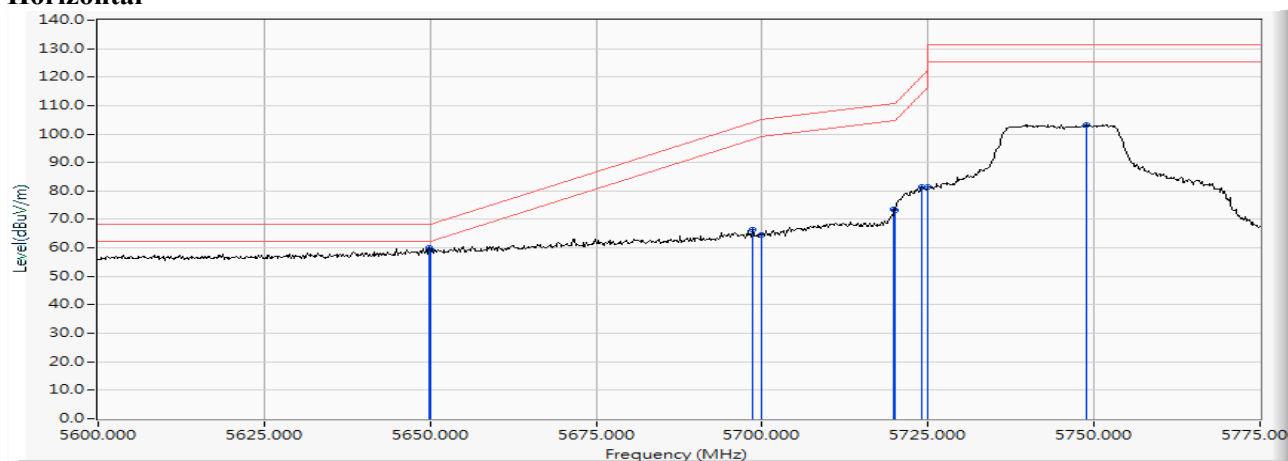

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5649.875	16.446	43.685	60.131	-8.089	68.220	PEAK
2		5650.000	16.447	42.752	59.199	-9.021	68.220	PEAK
3		5698.525	16.500	49.939	66.439	-37.670	104.109	PEAK
4		5700.000	16.502	48.186	64.688	-40.512	105.200	PEAK
5		5719.875	16.535	57.164	73.699	-37.066	110.765	PEAK
6		5720.000	16.535	56.772	73.307	-37.493	110.800	PEAK
7		5724.075	16.543	64.816	81.359	-38.732	120.091	PEAK
8		5725.000	16.544	64.774	81.318	-40.882	122.200	PEAK
9	*	5748.925	16.566	86.701	103.267	--	--	PEAK


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 149 (5745MHz)

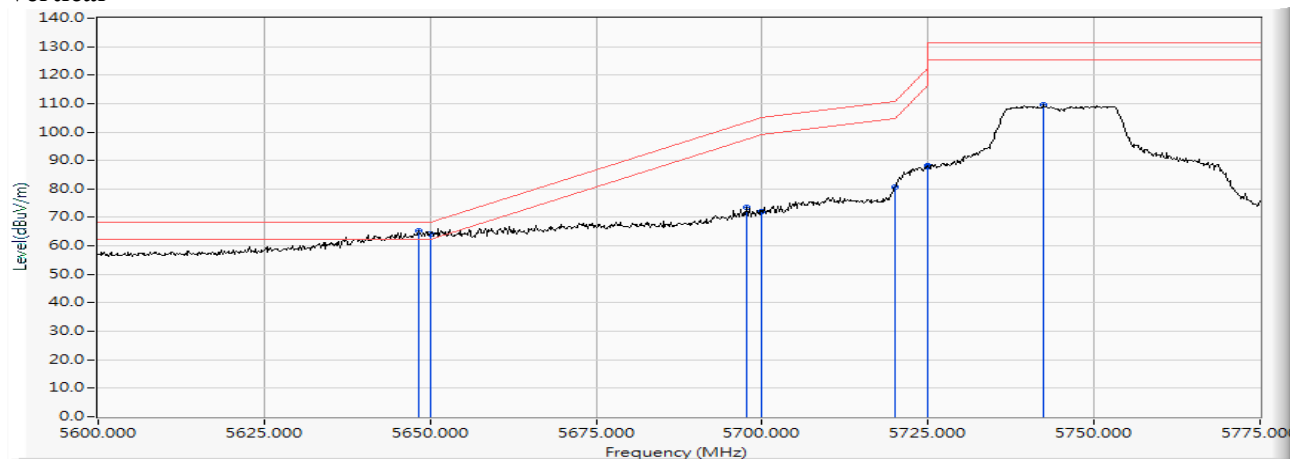Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5648.300	16.442	48.876	65.318	-2.902	68.220	PEAK
2		5650.000	16.447	47.833	64.280	-3.940	68.220	PEAK
3		5697.650	16.499	57.041	73.540	-29.922	103.462	PEAK
4		5700.000	16.502	55.705	72.207	-32.993	105.200	PEAK
5		5720.000	16.535	64.037	80.572	-30.228	110.800	PEAK
6		5724.950	16.544	71.534	88.078	-34.008	122.086	PEAK
7		5725.000	16.544	71.324	87.868	-34.332	122.200	PEAK
8	*	5742.275	16.557	92.913	109.470	--	--	PEAK


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 165 (5825MHz)

Horizontal

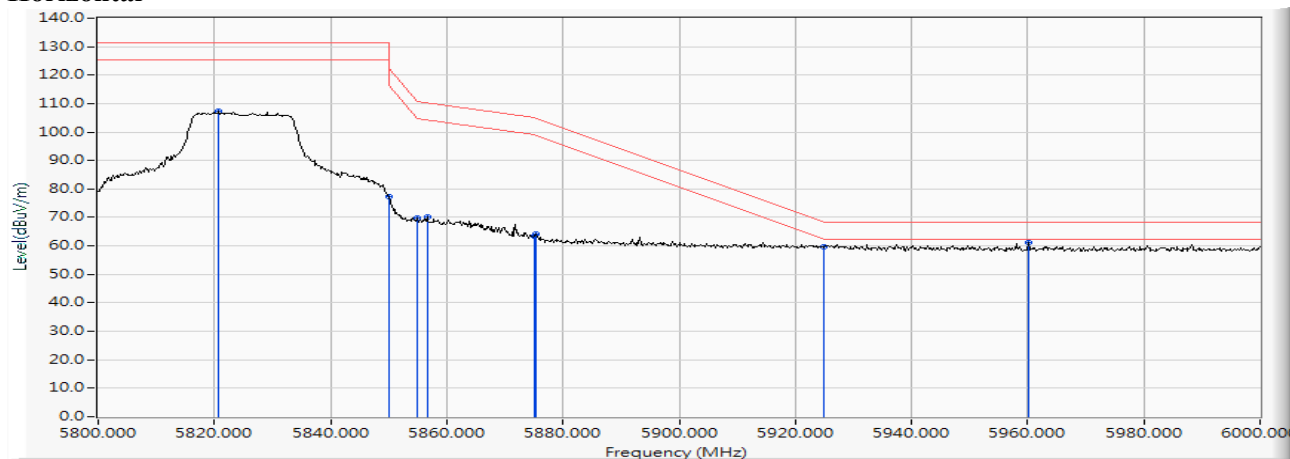

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5820.800	16.706	90.670	107.376	--	--	PEAK
2		5850.000	16.748	60.702	77.450	-44.750	122.200	PEAK
3		5855.000	16.758	53.110	69.868	-40.932	110.800	PEAK
4		5856.600	16.761	53.426	70.188	-40.164	110.352	PEAK
5		5875.000	16.807	46.445	63.253	-41.947	105.200	PEAK
6		5875.400	16.809	47.283	64.092	-40.812	104.904	PEAK
7		5925.000	16.920	42.723	59.643	-8.557	68.200	PEAK
8		5960.200	16.973	44.047	61.020	-7.180	68.200	PEAK


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 2 SISO A: Transmit (802.11n-20BW_7.2Mbps)-Channel 165 (5825MHz)

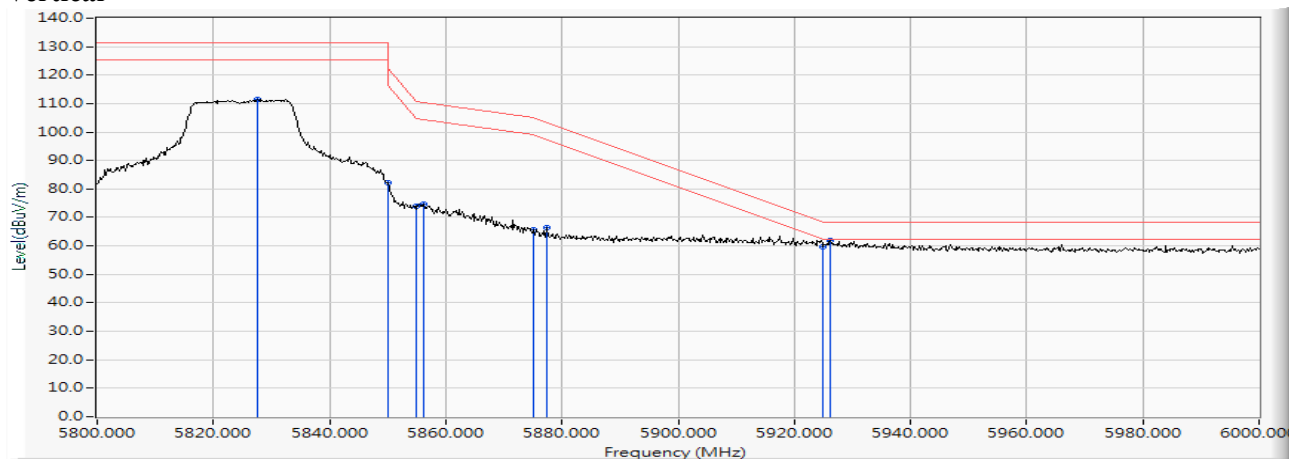Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5827.600	16.715	94.759	111.474	--	--	PEAK
2		5850.000	16.748	65.488	82.236	-39.964	122.200	PEAK
3		5855.000	16.758	57.038	73.796	-37.004	110.800	PEAK
4		5856.200	16.761	57.977	74.738	-35.726	110.464	PEAK
5		5875.000	16.807	49.047	65.855	-39.345	105.200	PEAK
6		5877.400	16.814	49.667	66.481	-36.943	103.424	PEAK
7		5925.000	16.920	42.872	59.792	-8.408	68.200	PEAK
8		5926.200	16.921	45.086	62.007	-6.193	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 38 (5190MHz)

Horizontal

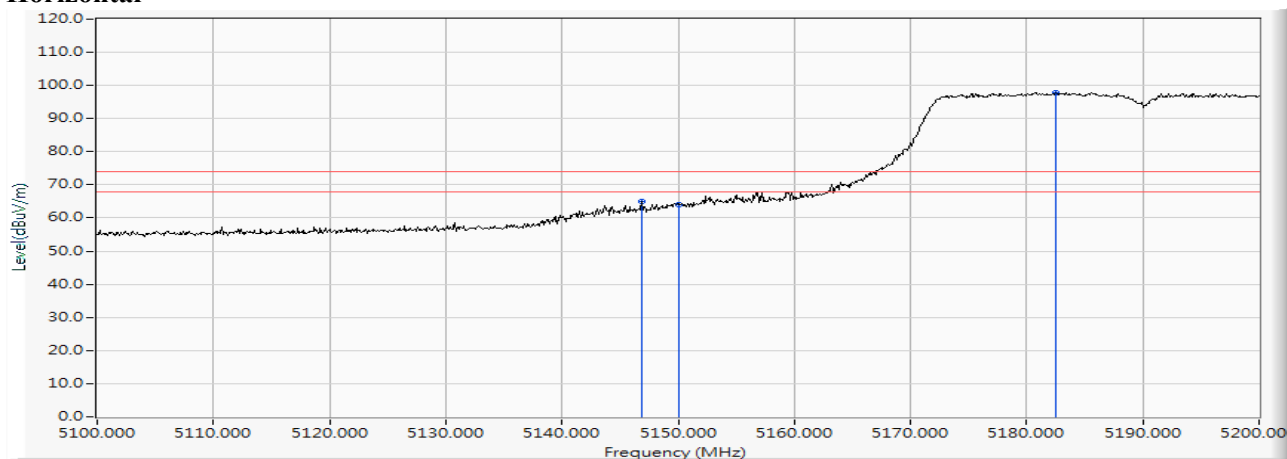


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5146.900	15.289	49.579	64.868	-9.132	74.000	PEAK
2		5150.000	15.307	48.559	63.866	-10.134	74.000	PEAK
3	*	5182.500	15.403	82.457	97.860	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 38 (5190MHz)

Horizontal

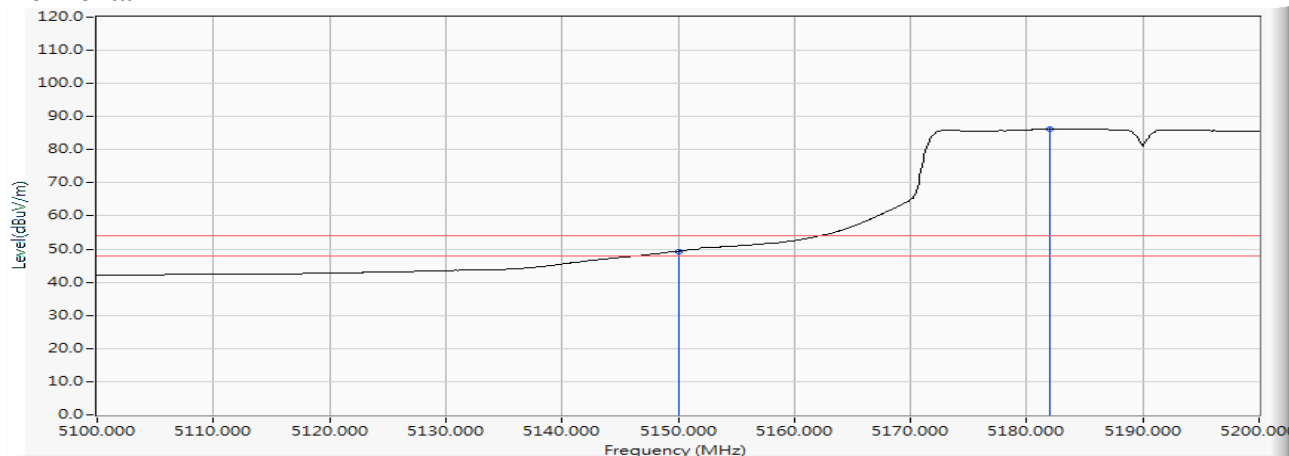


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	34.075	49.382	-4.618	54.000	AVERAGE
2	*	5182.000	15.401	70.887	86.288	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 38 (5190MHz)

Vertical

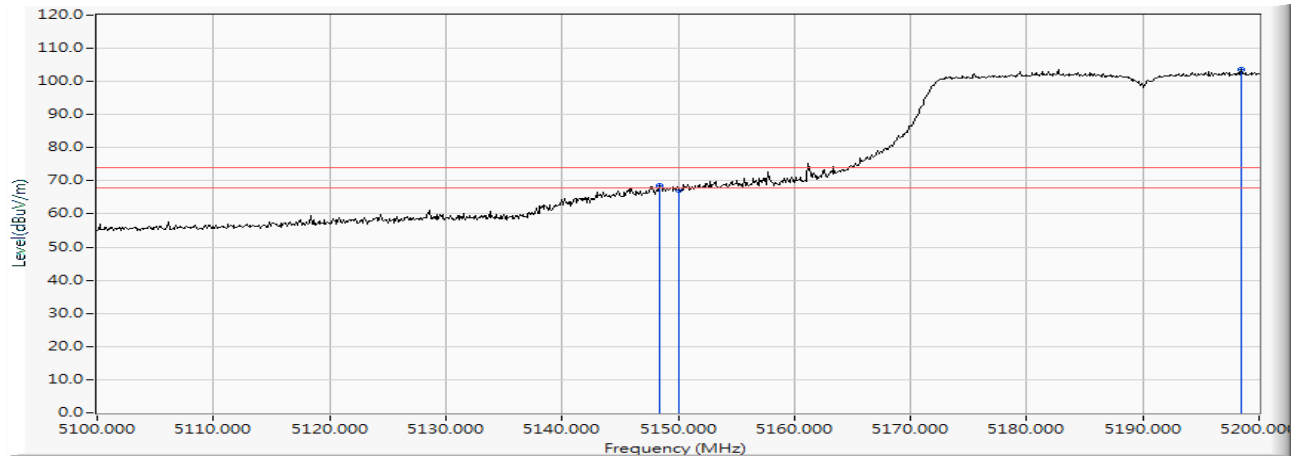


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5148.400	15.298	53.213	68.511	-5.489	74.000	PEAK
2		5150.000	15.307	51.785	67.092	-6.908	74.000	PEAK
3	*	5198.500	15.467	88.259	103.726	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 38 (5190MHz)

Vertical

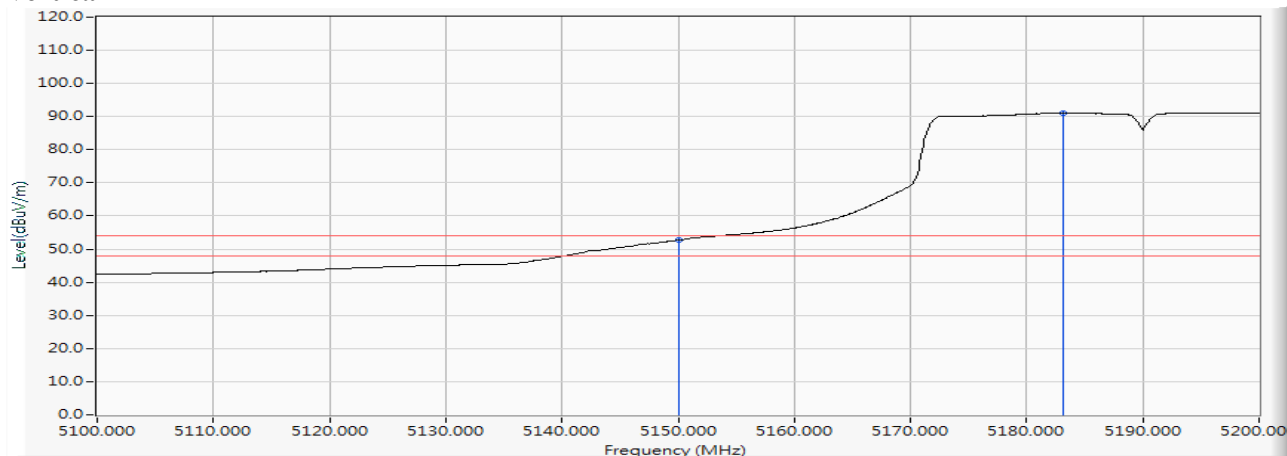


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	37.401	52.708	-1.292	54.000	AVERAGE
2	*	5183.200	15.406	75.660	91.066	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 62 (5310MHz)

Horizontal

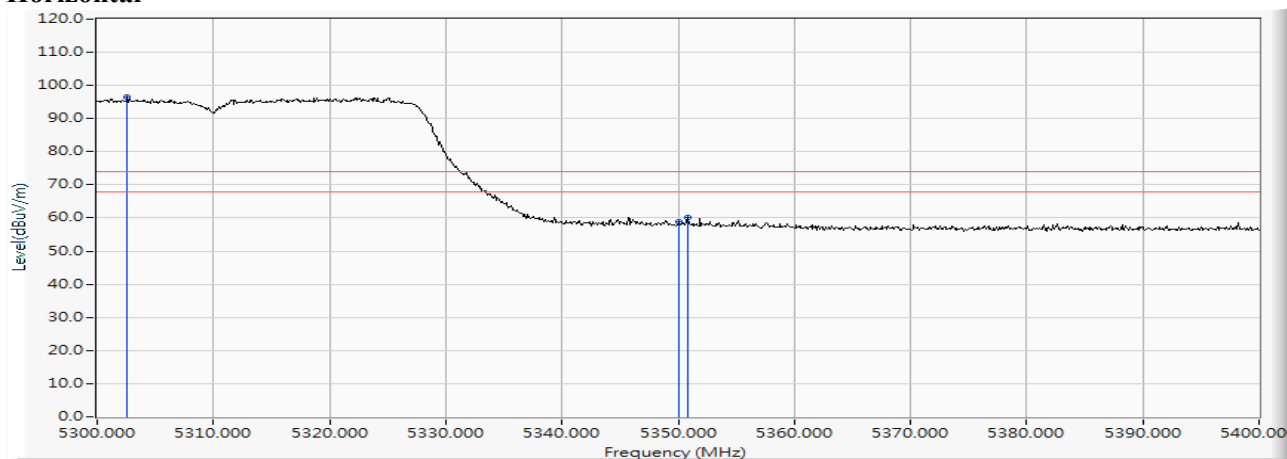


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5302.600	15.802	80.564	96.367	--	--	PEAK
2		5350.000	15.912	43.032	58.944	-15.056	74.000	PEAK
3		5350.800	15.915	44.170	60.085	-13.915	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 62 (5310MHz)

Horizontal

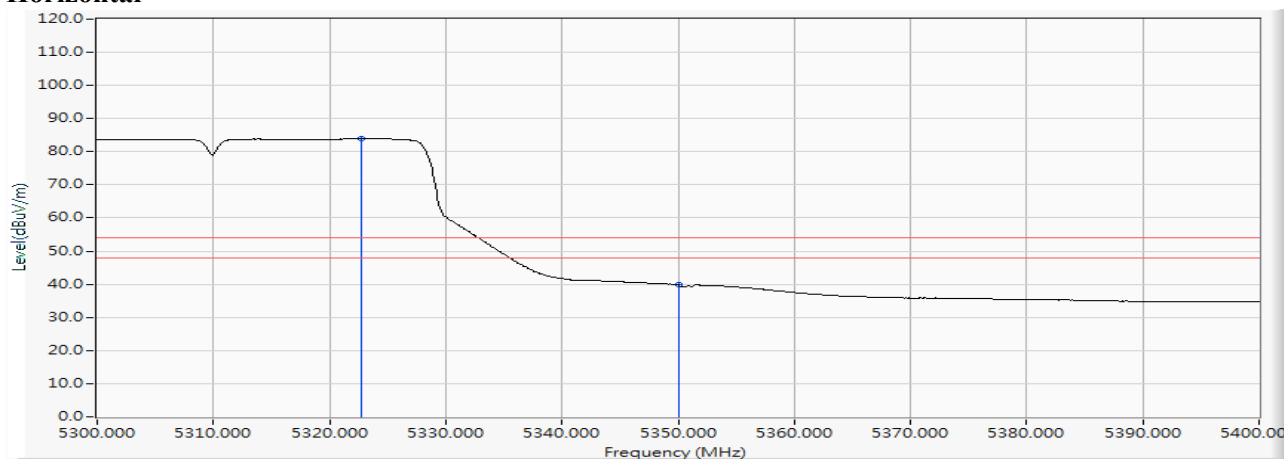


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5322.700	15.858	68.124	83.983	--	--	AVERAGE
2		5350.000	15.912	24.037	39.949	-14.051	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 62 (5310MHz)

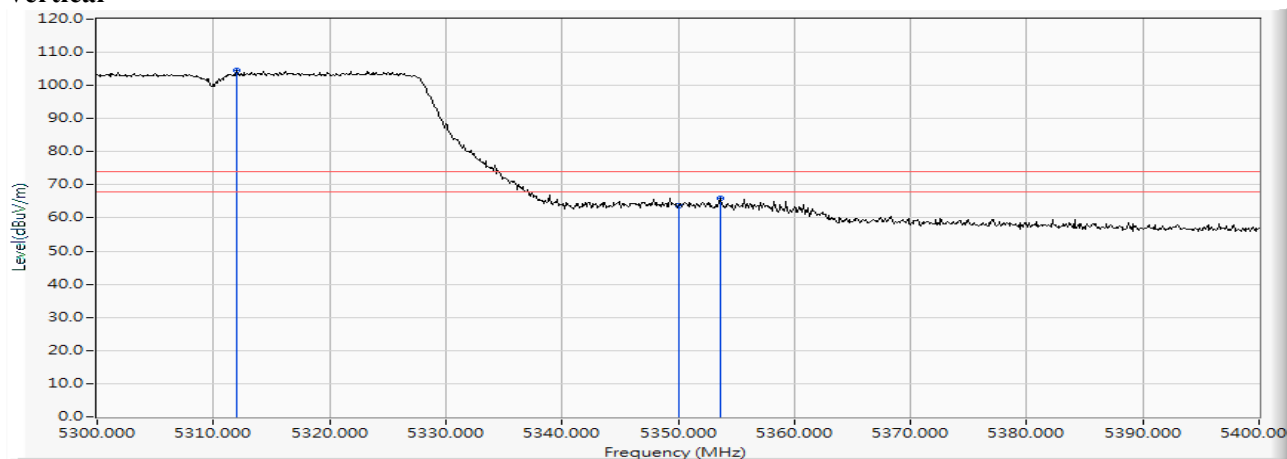
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5312.000	15.825	88.595	104.420	--	--	PEAK
2		5350.000	15.912	47.684	63.596	-10.404	74.000	PEAK
3		5353.700	15.924	49.958	65.882	-8.118	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 62 (5310MHz)

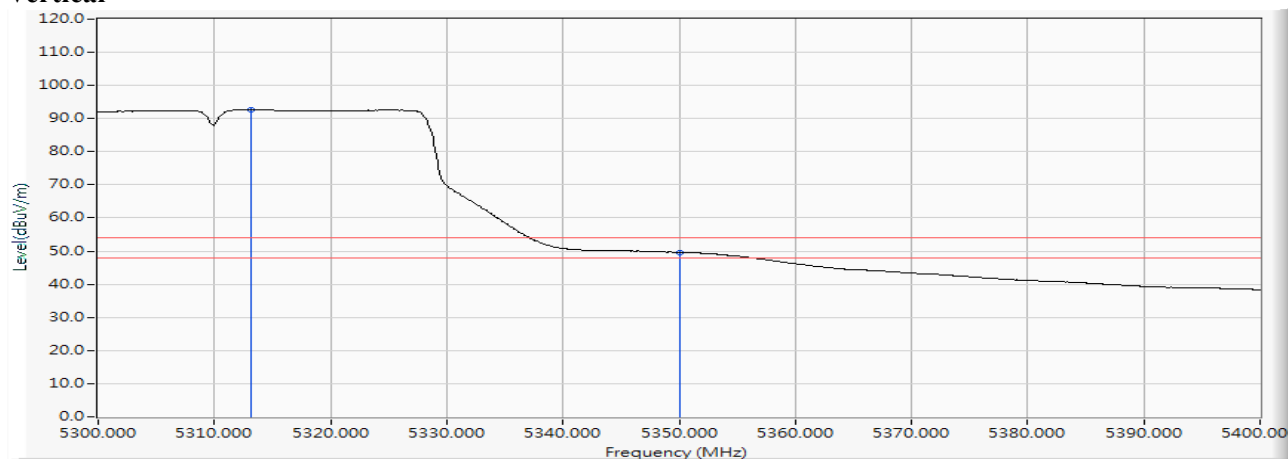Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5313.100	15.827	76.829	92.657	--	--	AVERAGE
2		5350.000	15.912	33.705	49.617	-4.383	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 102 (5510MHz)

Horizontal

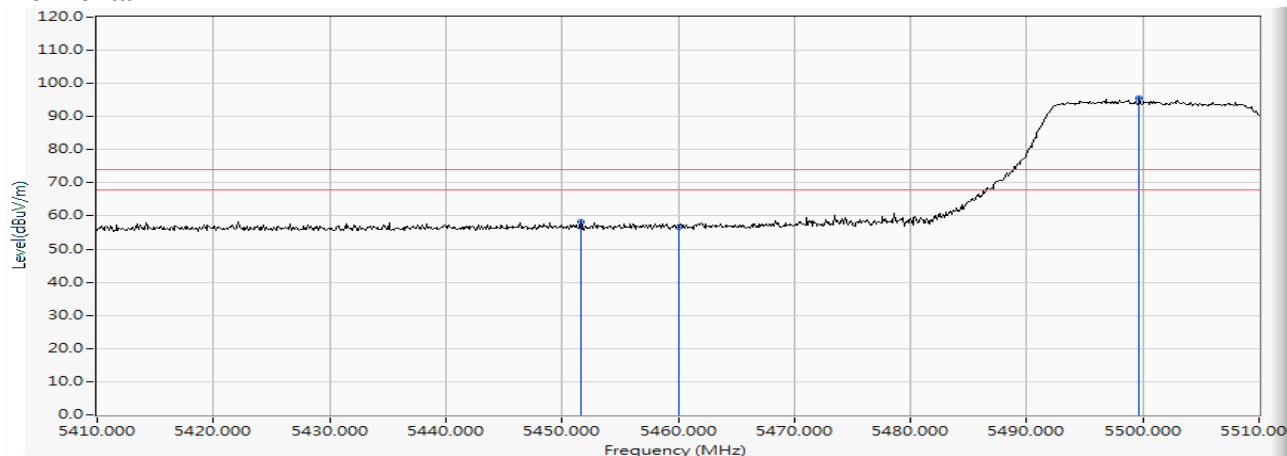


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5451.600	16.162	42.099	58.261	-15.739	74.000	PEAK
2		5460.000	16.185	40.386	56.571	-17.429	74.000	PEAK
3	*	5499.700	16.270	79.161	95.431	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 102 (5510MHz)

Horizontal

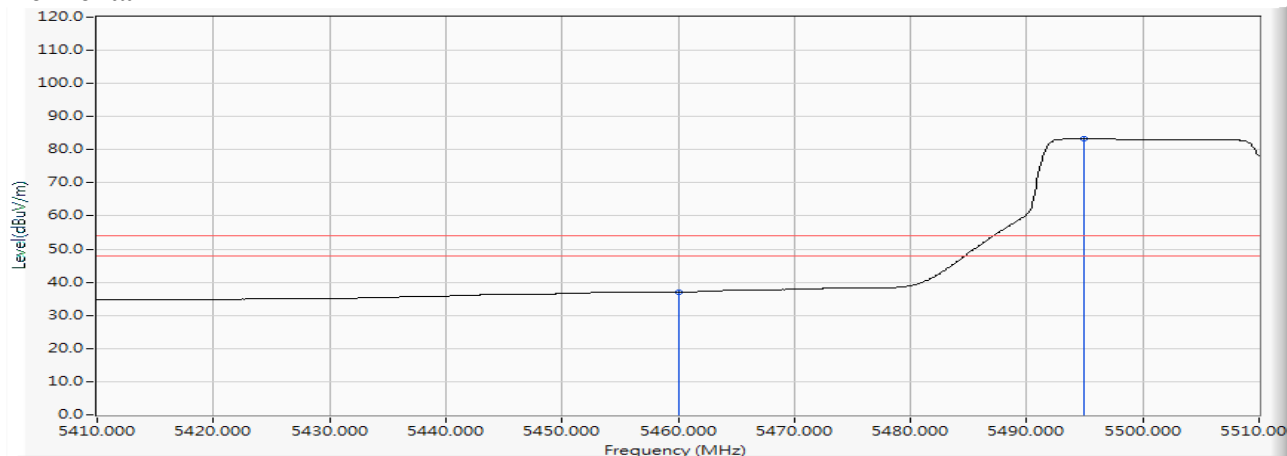


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5460.000	16.185	20.891	37.076	-16.924	54.000	AVERAGE
2	*	5494.900	16.263	67.118	83.382	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 102 (5510MHz)

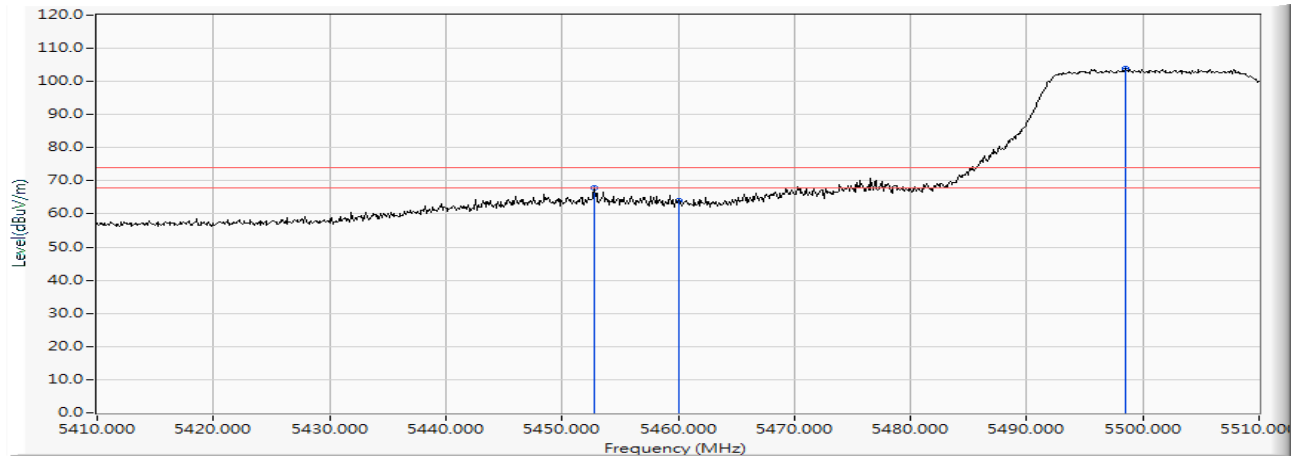
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5452.800	16.167	51.717	67.883	-6.117	74.000	PEAK
2		5460.000	16.185	47.760	63.945	-10.055	74.000	PEAK
3	*	5498.500	16.268	87.643	103.911	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 102 (5510MHz)

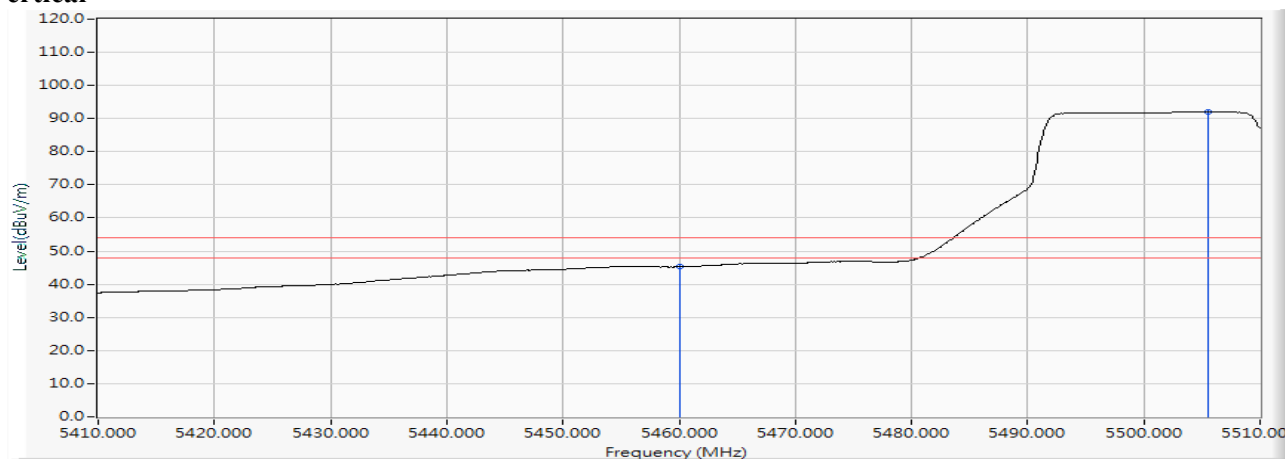Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5460.000	16.185	29.088	45.273	-8.727	54.000	AVERAGE
2	*	5505.500	16.273	75.783	92.056	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 102 (5510MHz)

Horizontal

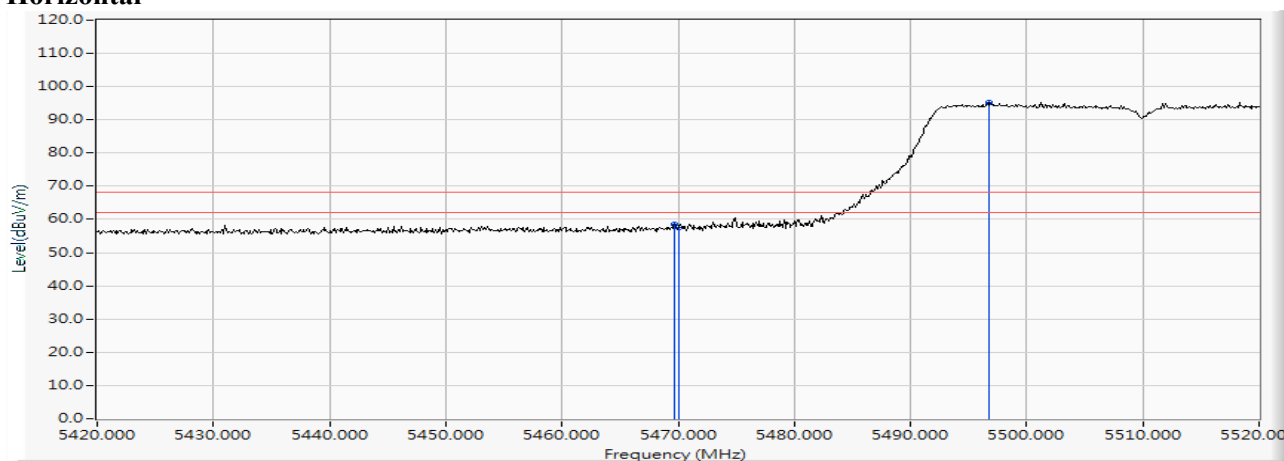

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5469.700	16.199	42.454	58.653	-9.567	68.220	PEAK
2		5470.000	16.200	41.453	57.653	-10.567	68.220	PEAK
3	*	5496.700	16.266	78.902	95.168	--	--	PEAK


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 102 (5510MHz)

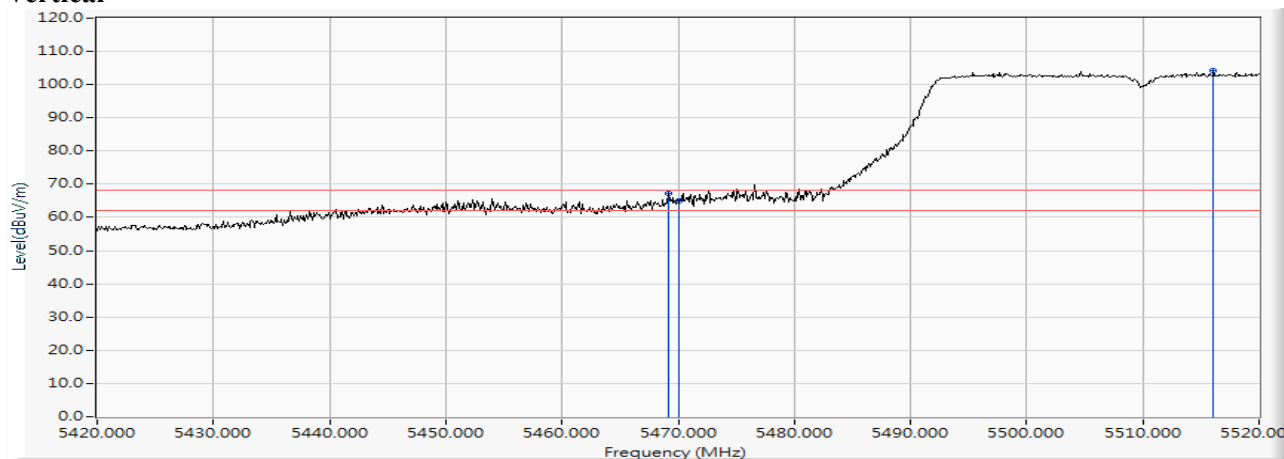Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5469.200	16.198	51.024	67.222	-0.998	68.220	PEAK
2		5470.000	16.200	48.735	64.935	-3.285	68.220	PEAK
3	*	5516.100	16.286	87.831	104.116	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 134 (5670MHz)


Horizontal

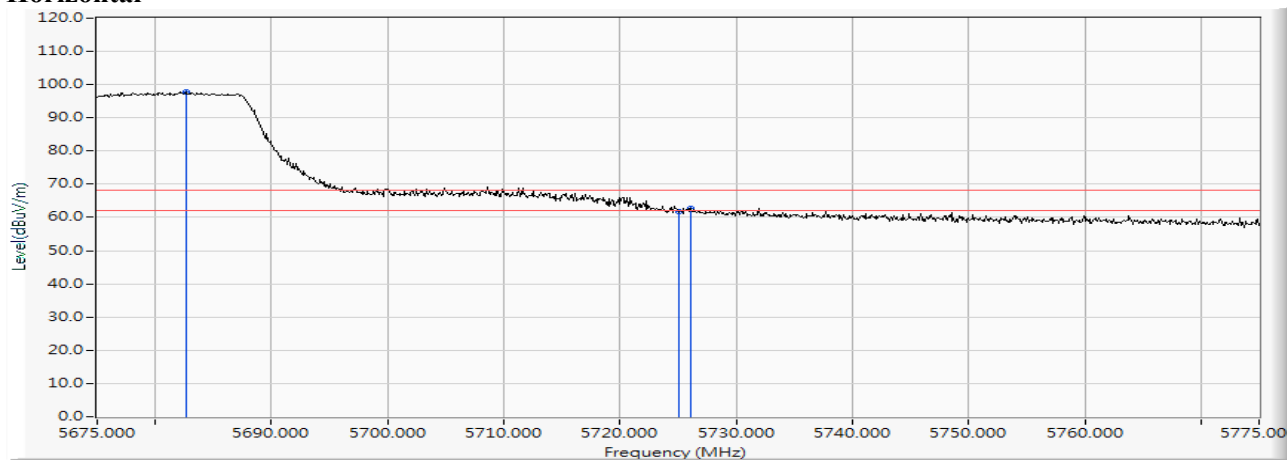

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5682.600	16.481	81.236	97.717	--	--	PEAK
2		5725.000	16.544	45.128	61.672	-6.548	68.220	PEAK
3		5726.100	16.546	46.251	62.797	-5.423	68.220	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 134 (5670MHz)


Vertical

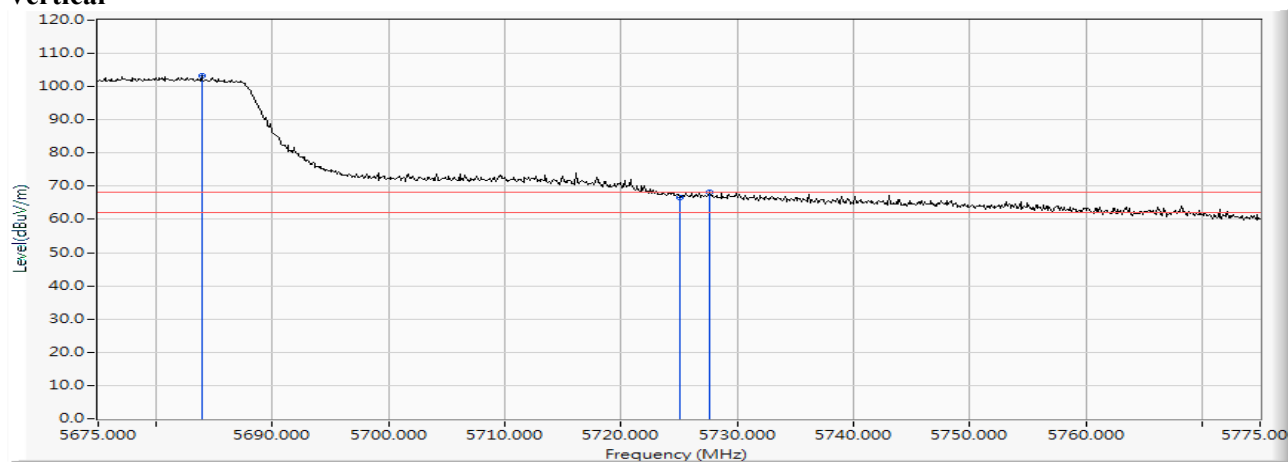

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5683.900	16.481	86.797	103.279	--	--	PEAK
2		5725.000	16.544	50.160	66.704	-1.516	68.220	PEAK
3		5727.600	16.548	51.601	68.149	-0.071	68.220	PEAK


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 151 (5755MHz)

Horizontal

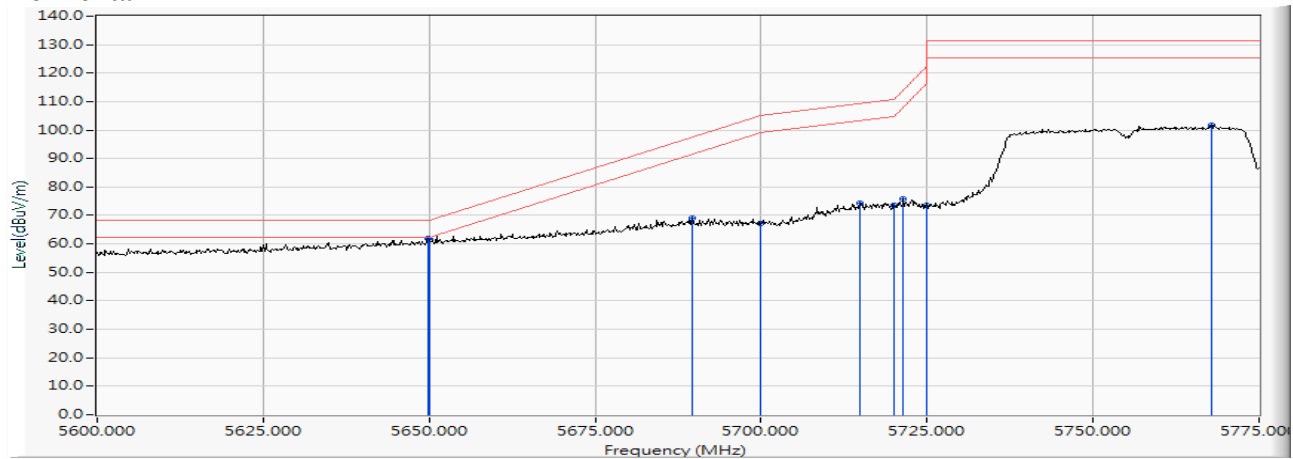

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5649.875	16.446	45.346	61.792	-6.428	68.220	PEAK
2		5650.000	16.447	45.223	61.670	-6.550	68.220	PEAK
3		5689.600	16.488	52.554	69.043	-28.465	97.508	PEAK
4		5700.000	16.502	50.539	67.041	-38.159	105.200	PEAK
5		5714.800	16.525	57.960	74.485	-34.859	109.344	PEAK
6		5720.000	16.535	56.875	73.410	-37.390	110.800	PEAK
7		5721.450	16.538	59.218	75.756	-38.350	114.106	PEAK
8		5725.000	16.544	57.105	73.649	-48.551	122.200	PEAK
9	*	5767.825	16.595	85.154	101.748	--	--	PEAK


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 151 (5755MHz)

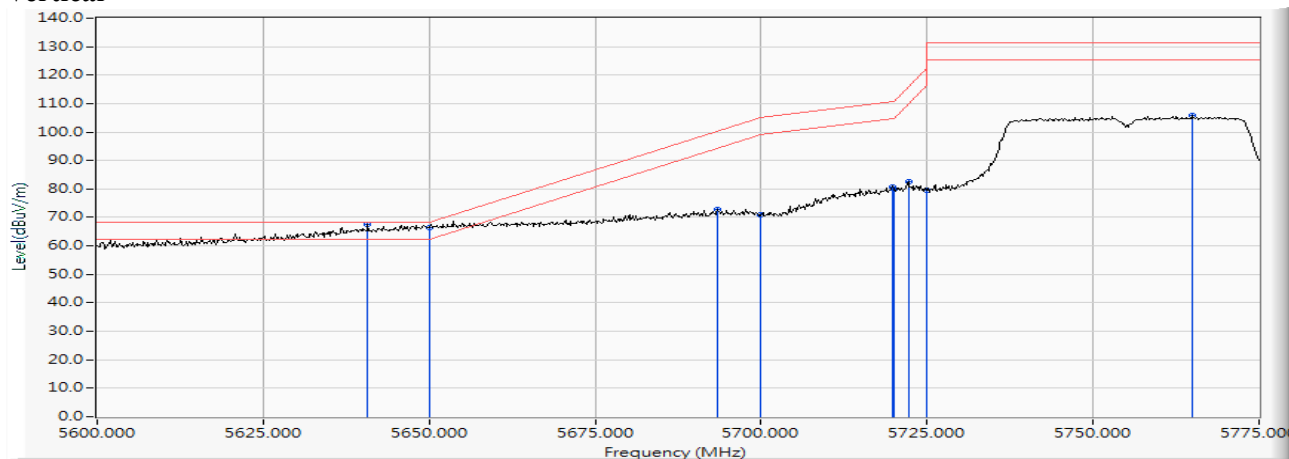Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5640.775	16.422	51.097	67.519	-0.701	68.220	PEAK
2		5650.000	16.447	49.976	66.423	-1.797	68.220	PEAK
3		5693.450	16.494	56.418	72.911	-27.445	100.356	PEAK
4		5700.000	16.502	54.485	70.987	-34.213	105.200	PEAK
5		5719.700	16.535	64.327	80.862	-29.854	110.716	PEAK
6		5720.000	16.535	63.571	80.106	-30.694	110.800	PEAK
7		5722.150	16.539	65.887	82.426	-33.276	115.702	PEAK
8		5725.000	16.544	63.145	79.689	-42.511	122.200	PEAK
9	*	5764.850	16.591	89.085	105.676	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 159 (5795MHz)


Horizontal

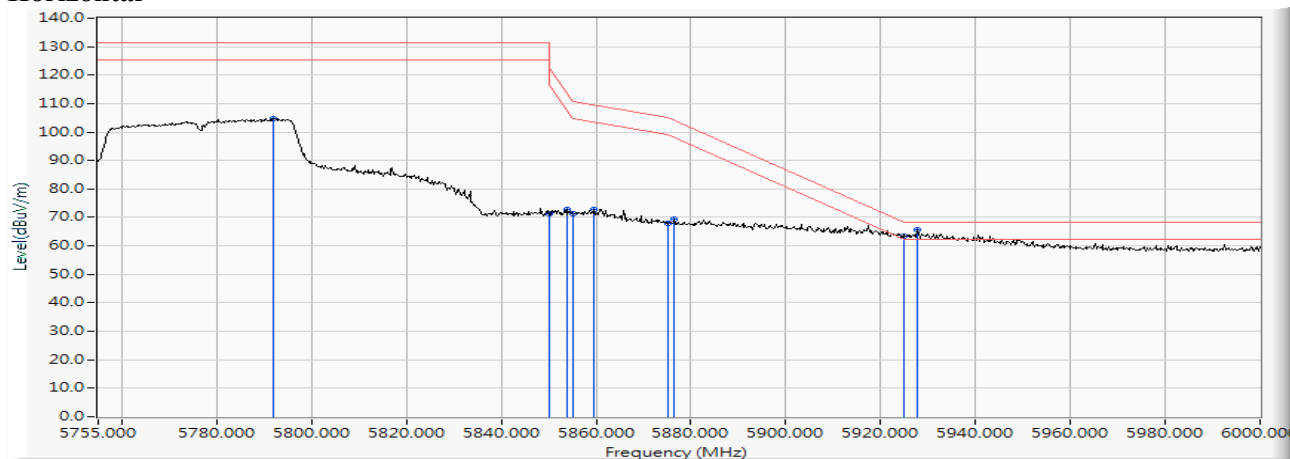

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5791.995	16.638	88.102	104.740	--	--	PEAK
2		5850.000	16.748	54.640	71.388	-50.812	122.200	PEAK
3		5853.980	16.755	56.034	72.790	-40.336	113.126	PEAK
4		5855.000	16.758	54.432	71.190	-39.610	110.800	PEAK
5		5859.615	16.769	56.168	72.937	-36.571	109.508	PEAK
6		5875.000	16.807	51.021	67.829	-37.371	105.200	PEAK
7		5876.520	16.812	52.482	69.294	-34.781	104.075	PEAK
8		5925.000	16.920	46.416	63.336	-4.864	68.200	PEAK
9		5927.725	16.922	48.830	65.753	-2.447	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 3 SISO A: Transmit (802.11n-40BW_15Mbps)-Channel 159 (5795MHz)


Vertical

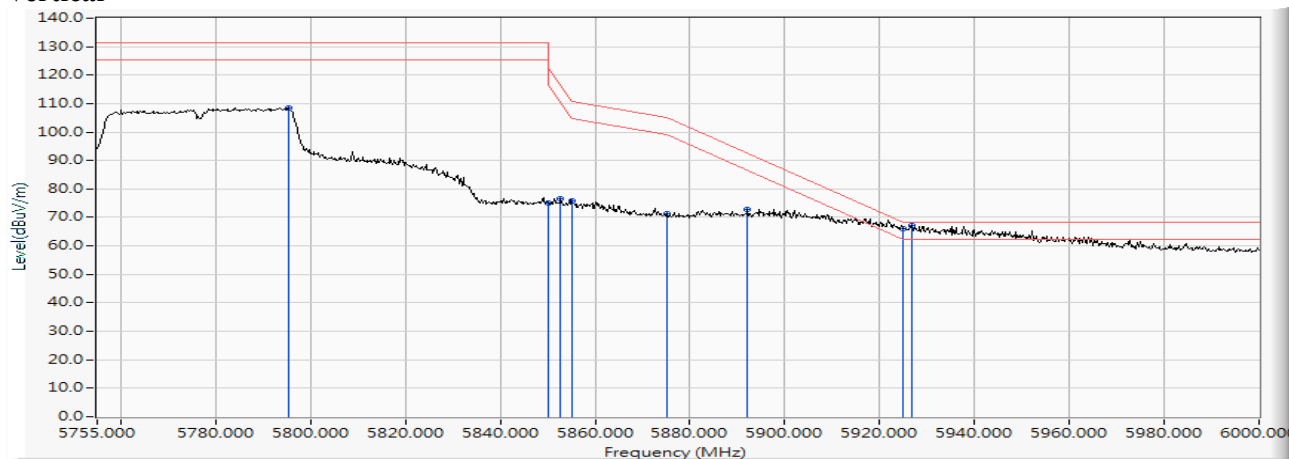

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5795.425	16.648	91.868	108.516	--	--	PEAK
2		5850.000	16.748	58.317	75.065	-47.135	122.200	PEAK
3		5852.755	16.753	59.979	76.732	-39.187	115.919	PEAK
4		5855.000	16.758	59.230	75.988	-34.812	110.800	PEAK
5		5875.000	16.807	54.370	71.178	-34.022	105.200	PEAK
6		5892.200	16.849	56.132	72.982	-19.490	92.472	PEAK
7		5925.000	16.920	49.032	65.952	-2.248	68.200	PEAK
8		5926.745	16.921	50.130	67.052	-1.148	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps)-Channel 42 (5210MHz)

Horizontal

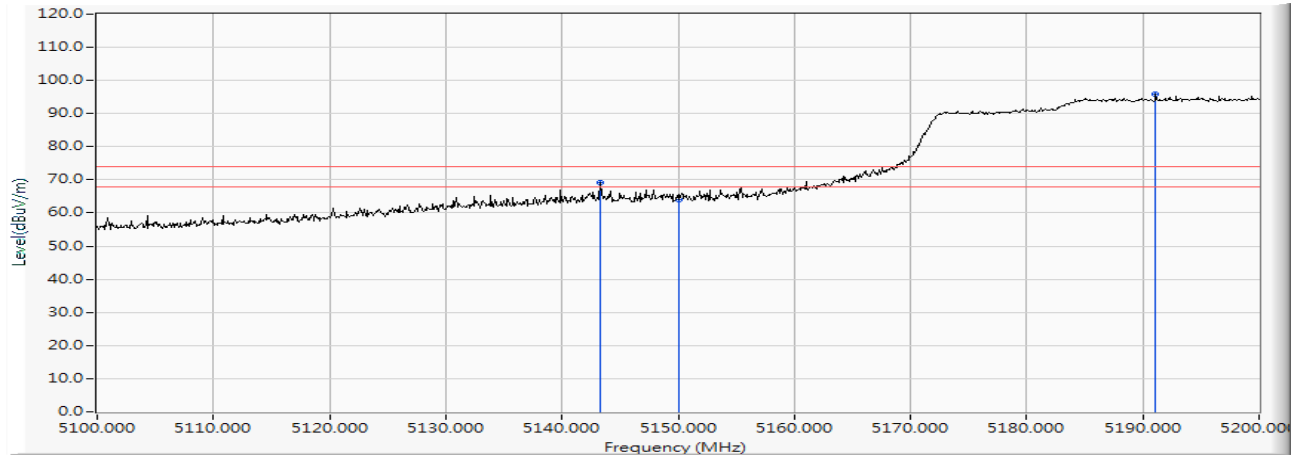


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5143.300	15.270	53.883	69.152	-4.848	74.000	PEAK
2		5150.000	15.307	48.693	64.000	-10.000	74.000	PEAK
3	*	5191.100	15.439	80.575	96.014	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps)-Channel 42 (5210MHz)

Horizontal

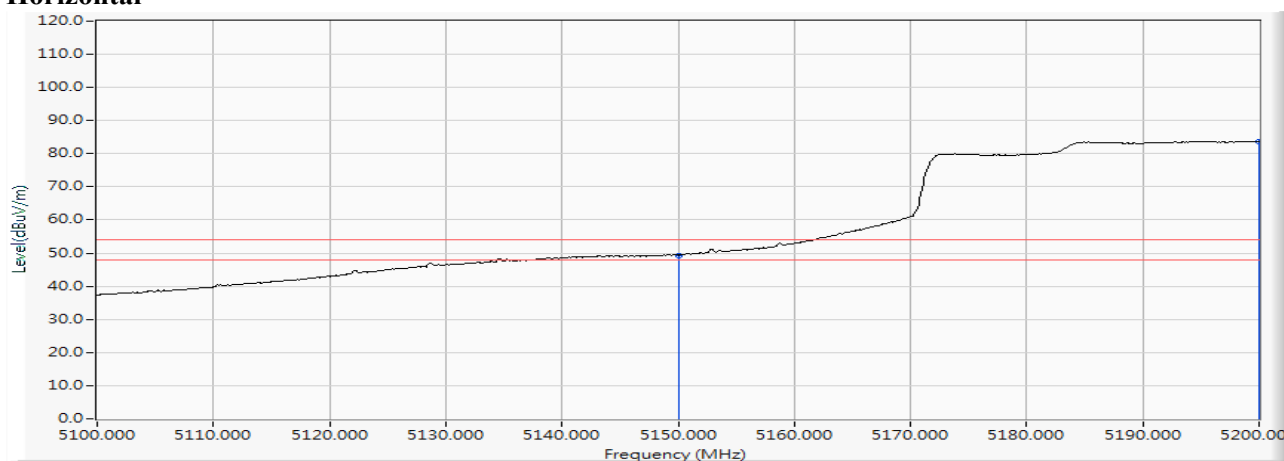


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	33.985	49.292	-4.708	54.000	AVERAGE
2	*	5200.000	15.473	68.320	83.793	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps)-Channel 42 (5210MHz)

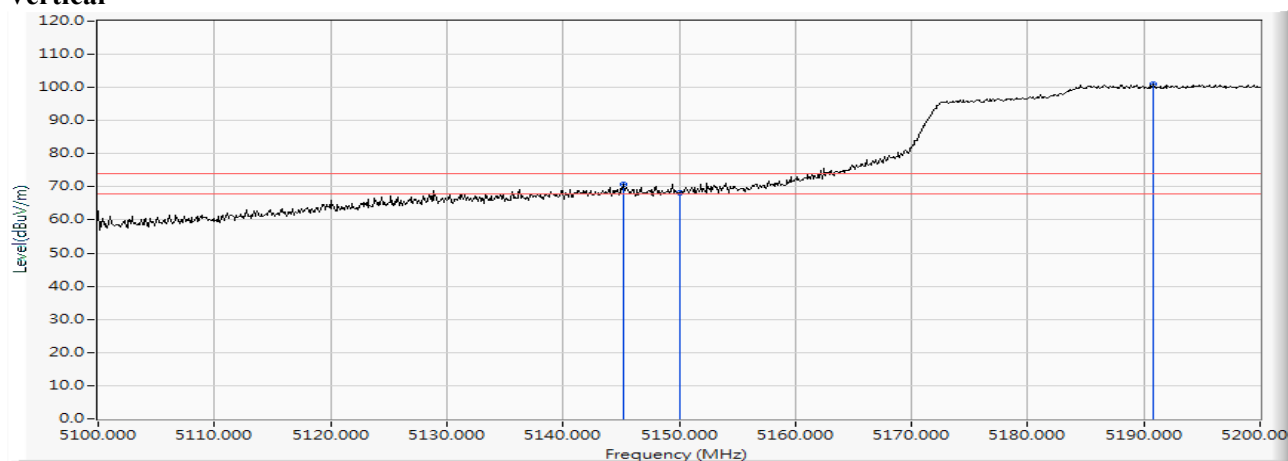
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5145.200	15.280	55.432	70.712	-3.288	74.000	PEAK
2		5150.000	15.307	52.809	68.116	-5.884	74.000	PEAK
3	*	5190.800	15.438	85.741	101.179	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps)-Channel 42 (5210MHz)

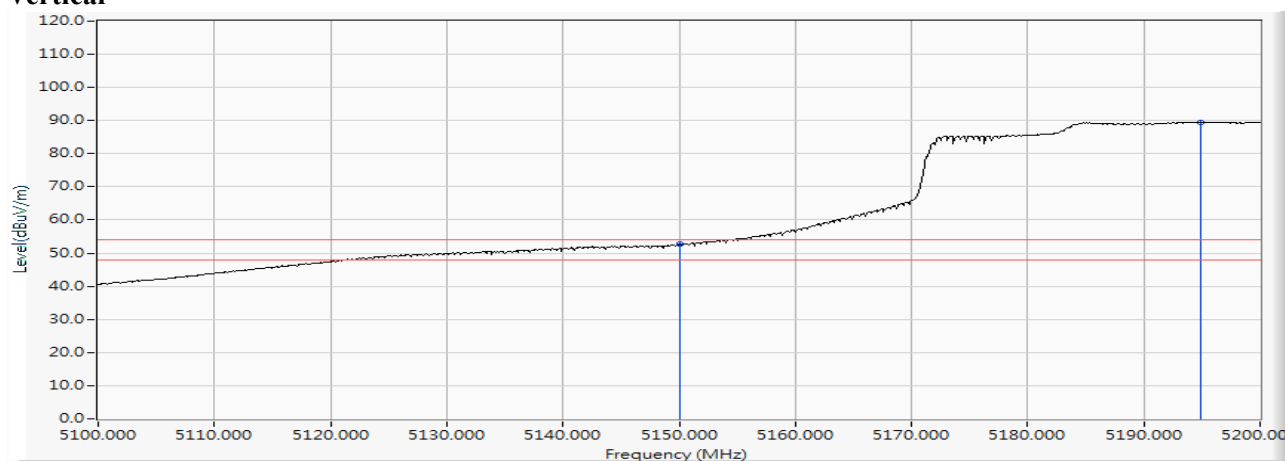Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	37.361	52.668	-1.332	54.000	AVERAGE
2	*	5194.900	15.453	74.048	89.501	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps)-Channel 58 (5290MHz)

Horizontal

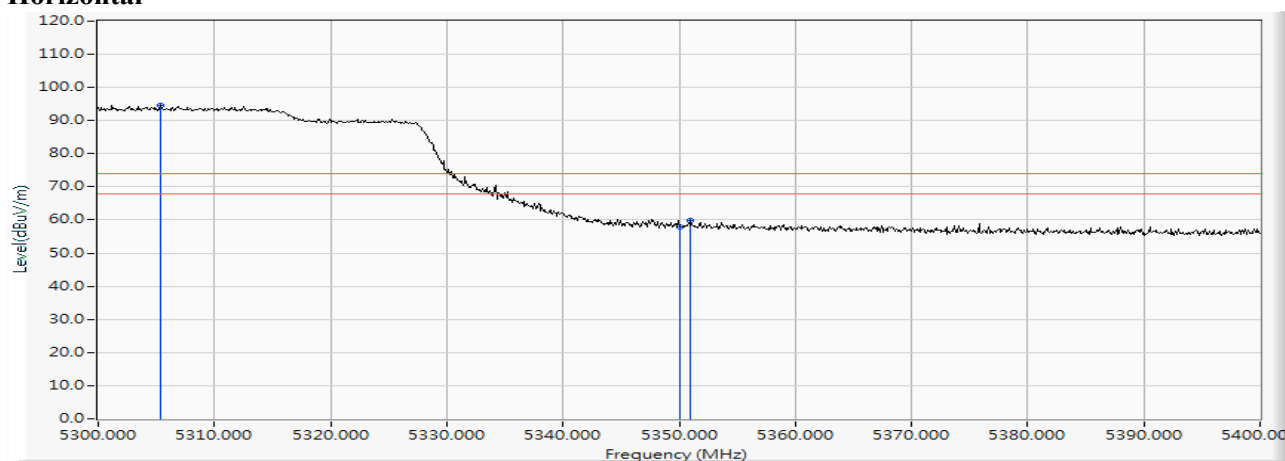


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5305.400	15.810	78.688	94.497	--	--	PEAK
2		5350.000	15.912	42.122	58.034	-15.966	74.000	PEAK
3		5351.000	15.915	44.047	59.962	-14.038	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps)-Channel 58 (5290MHz)

Horizontal

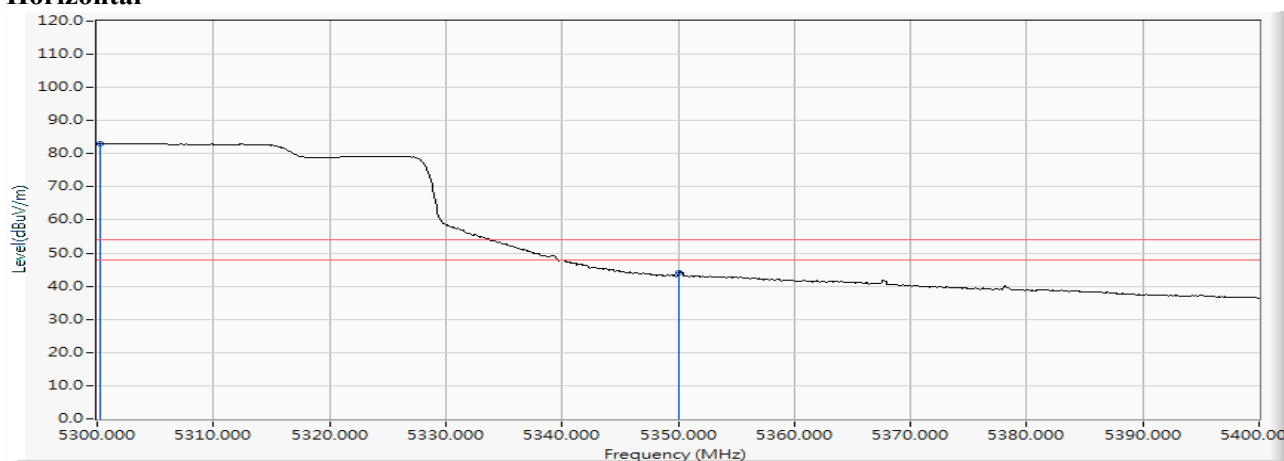


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5300.200	15.796	67.259	83.056	--	--	AVERAGE
2		5350.000	15.912	28.305	44.217	-9.783	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps)-Channel 58 (5290MHz)

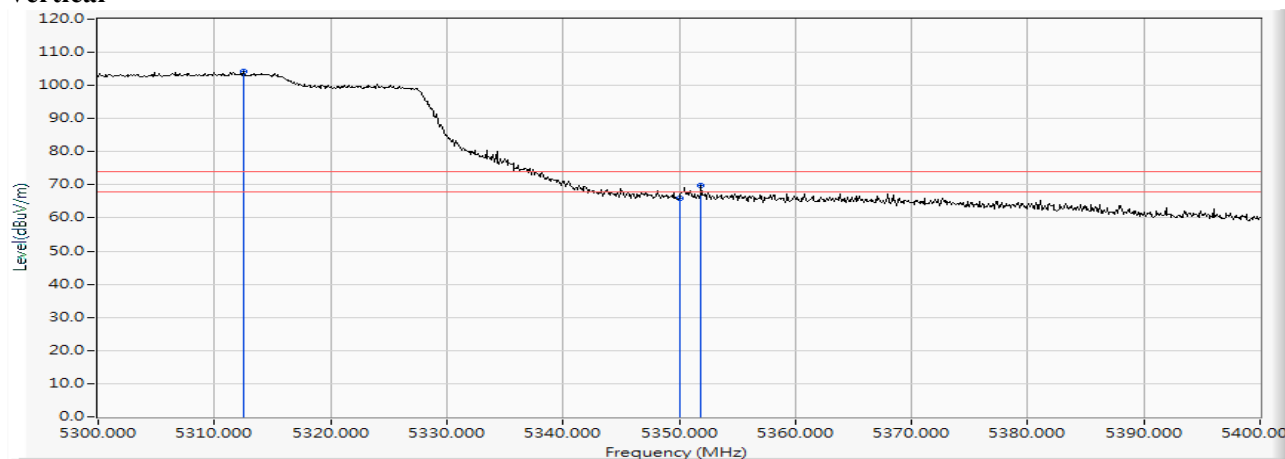
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5312.500	15.826	88.316	104.142	--	--	PEAK
2		5350.000	15.912	49.922	65.834	-8.166	74.000	PEAK
3		5351.900	15.918	54.020	69.938	-4.062	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps)-Channel 58 (5290MHz)

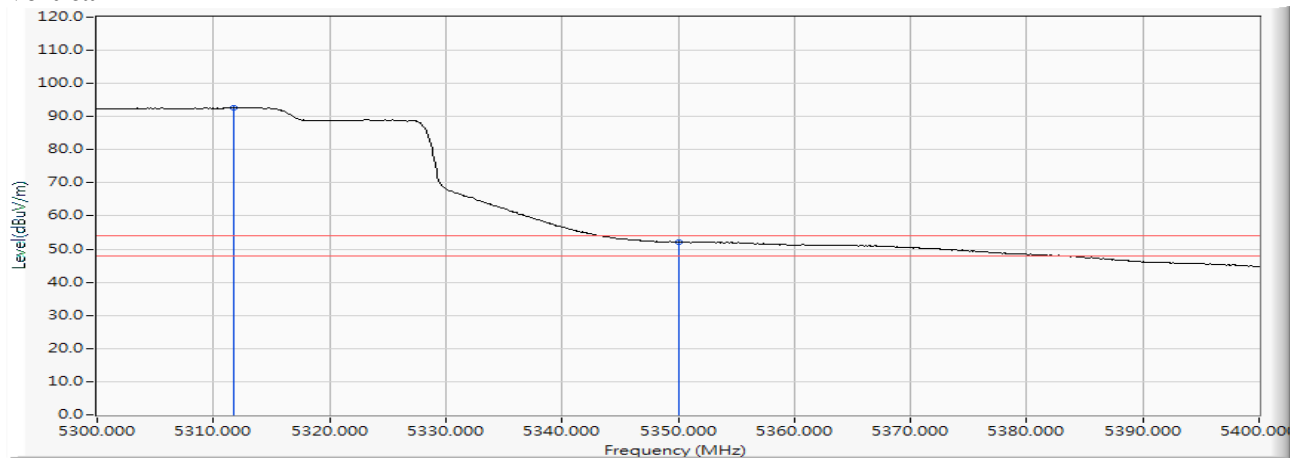Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5311.800	15.825	76.891	92.716	--	--	AVERAGE
2		5350.000	15.912	36.160	52.072	-1.928	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps)-Channel 106 (5530MHz)

Horizontal

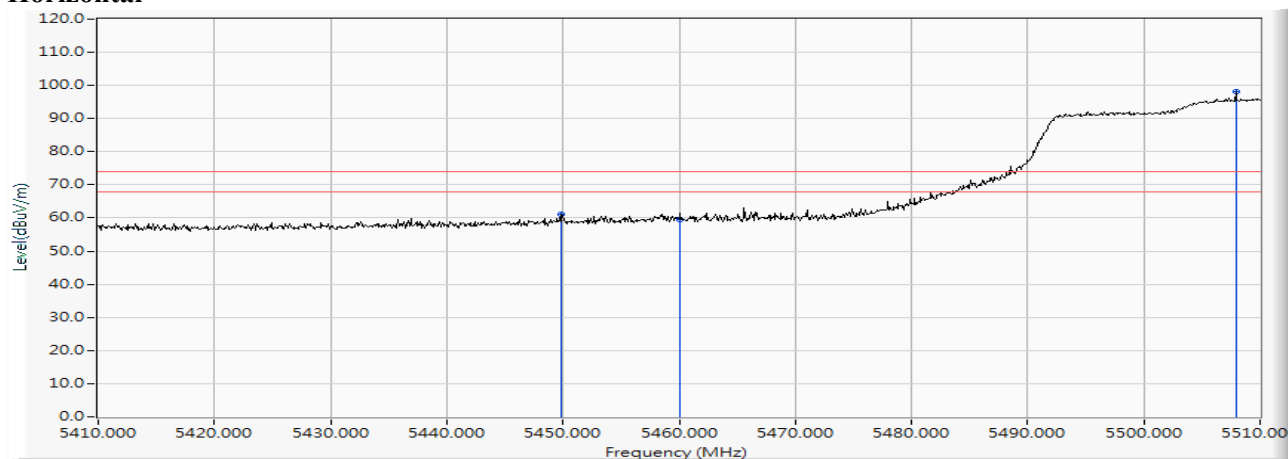


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5449.800	16.157	44.829	60.986	-13.014	74.000	PEAK
2		5460.000	16.185	43.321	59.506	-14.494	74.000	PEAK
3	*	5507.900	16.274	81.730	98.004	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps)-Channel 106 (5530MHz)

Horizontal

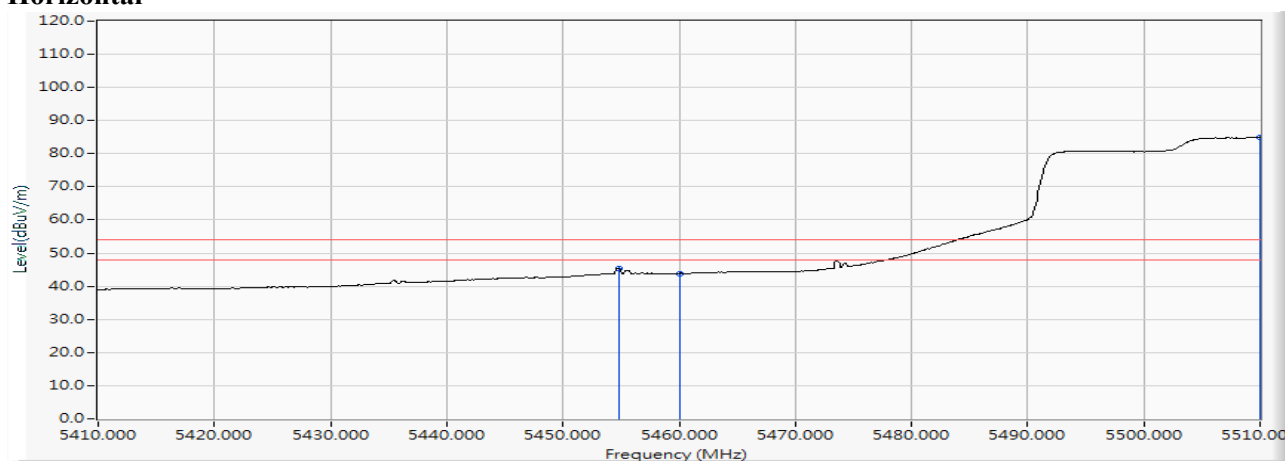


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5454.800	16.173	29.333	45.506	-8.494	54.000	AVERAGE
2		5460.000	16.185	27.630	43.815	-10.185	54.000	AVERAGE
3	*	5510.000	16.275	68.678	84.953	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps)-Channel 106 (5530MHz)

Vertical

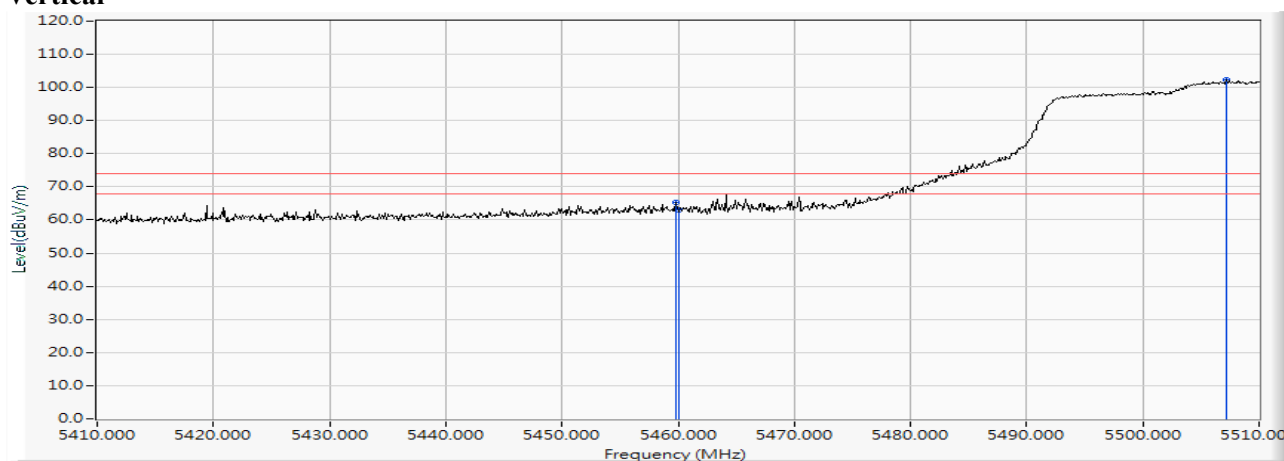


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5459.800	16.184	49.053	65.237	-8.763	74.000	PEAK
2		5460.000	16.185	46.948	63.133	-10.867	74.000	PEAK
3	*	5507.200	16.274	86.183	102.457	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps)-Channel 106 (5530MHz)

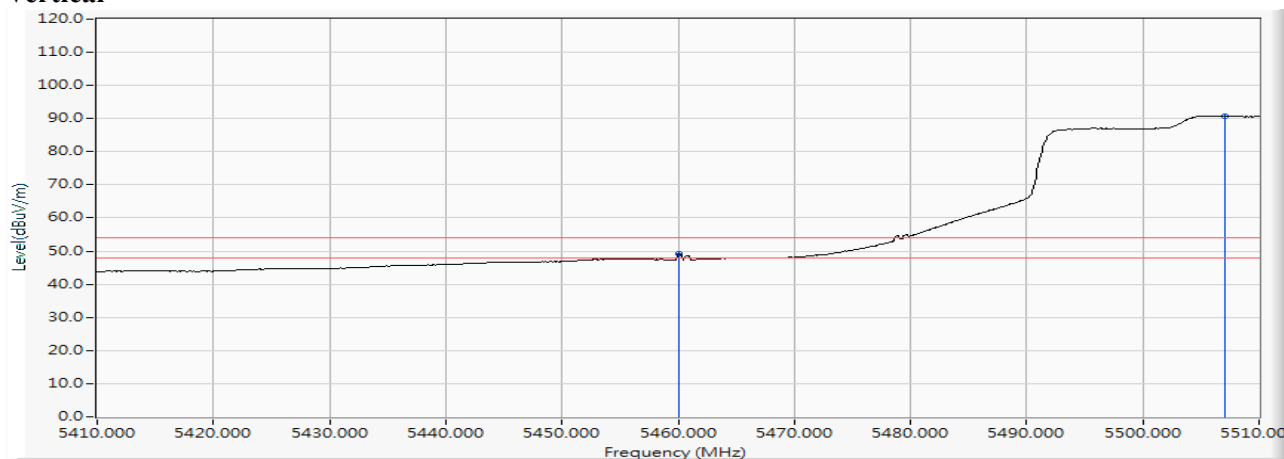Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5460.000	16.185	32.954	49.139	-4.861	54.000	AVERAGE
2	*	5507.000	16.273	74.525	90.798	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps)-Channel 106 (5530MHz)


Horizontal

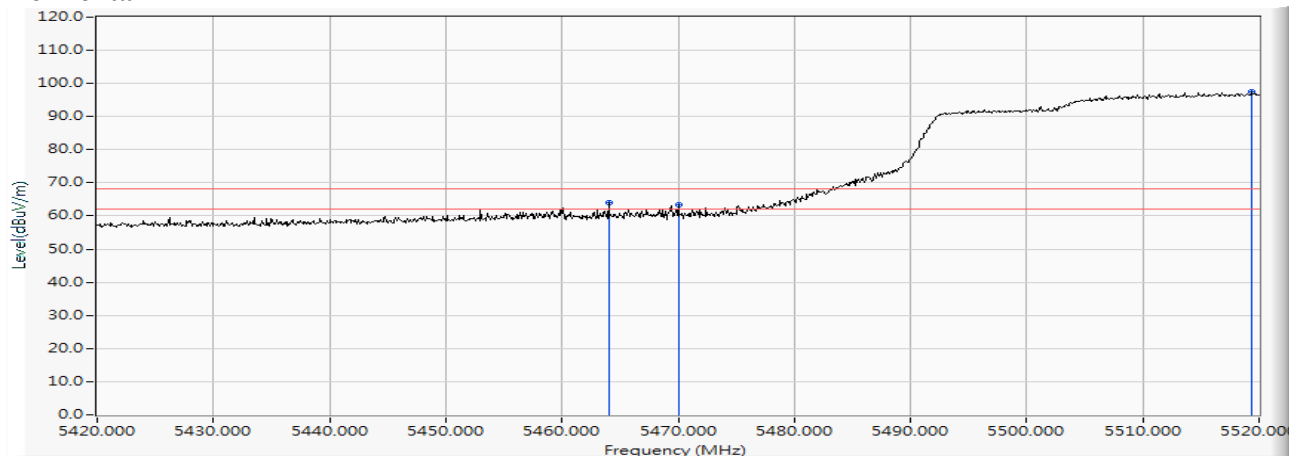

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5464.000	16.190	47.928	64.118	-4.102	68.220	PEAK
2		5470.000	16.200	47.310	63.510	-4.710	68.220	PEAK
3	*	5519.400	16.291	81.175	97.466	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps)-Channel 106 (5530MHz)


Vertical

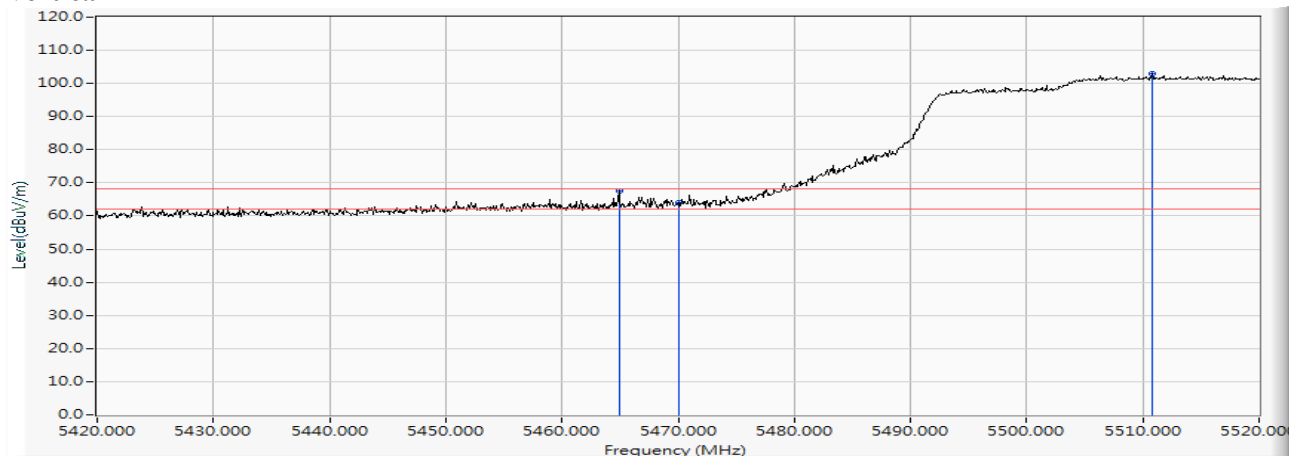

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5464.900	16.192	51.300	67.492	-0.728	68.220	PEAK
2		5470.000	16.200	47.849	64.049	-4.171	68.220	PEAK
3	*	5510.800	16.276	86.752	103.027	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps)-Channel 155 (5775MHz)


Horizontal

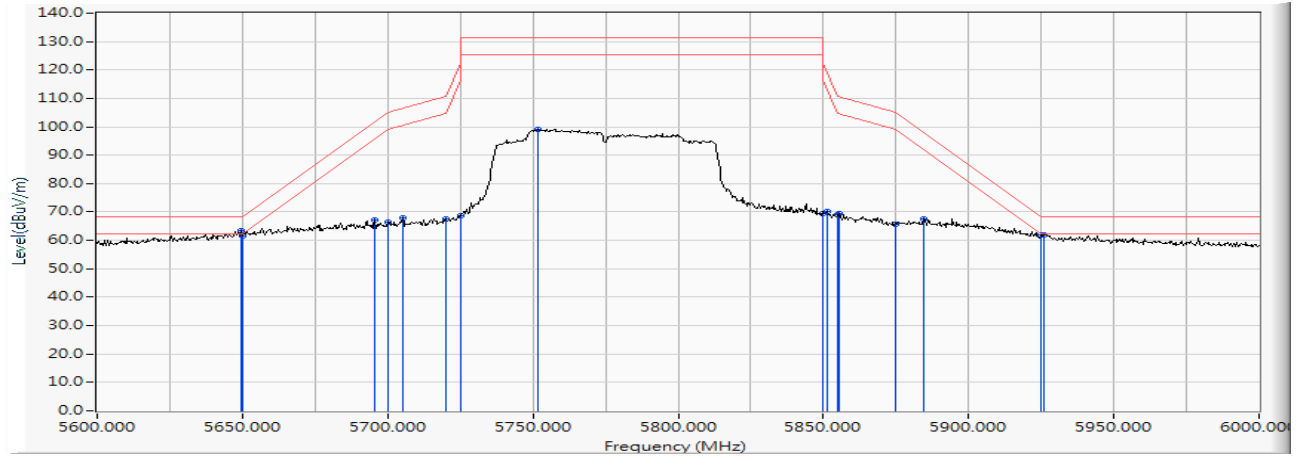

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5649.600	16.446	46.832	63.278	-4.942	68.220	PEAK
2		5650.000	16.447	45.253	61.700	-6.520	68.220	PEAK
3		5695.600	16.496	50.502	66.998	-34.948	101.946	PEAK
4		5700.000	16.502	49.888	66.390	-38.810	105.200	PEAK
5		5705.200	16.508	51.581	68.089	-38.567	106.656	PEAK
6		5720.000	16.535	50.862	67.397	-43.403	110.800	PEAK
7		5725.000	16.544	51.991	68.535	-53.665	122.200	PEAK
8	*	5751.600	16.570	82.624	99.194	--	--	PEAK
9		5850.000	16.748	52.661	69.409	-52.791	122.200	PEAK
10		5851.200	16.750	53.305	70.055	-49.409	119.464	PEAK
11		5855.000	16.758	52.327	69.085	-41.715	110.800	PEAK
12		5855.200	16.758	52.627	69.386	-41.358	110.744	PEAK
13		5875.000	16.807	48.957	65.765	-39.435	105.200	PEAK
14		5884.400	16.834	50.907	67.741	-30.503	98.244	PEAK
15		5925.000	16.920	44.935	61.855	-6.345	68.200	PEAK
16		5926.000	16.921	45.029	61.950	-6.250	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 4 SISO A: Transmit (802.11ac-80BW_32.5Mbps)-Channel 155 (5775MHz)


Vertical

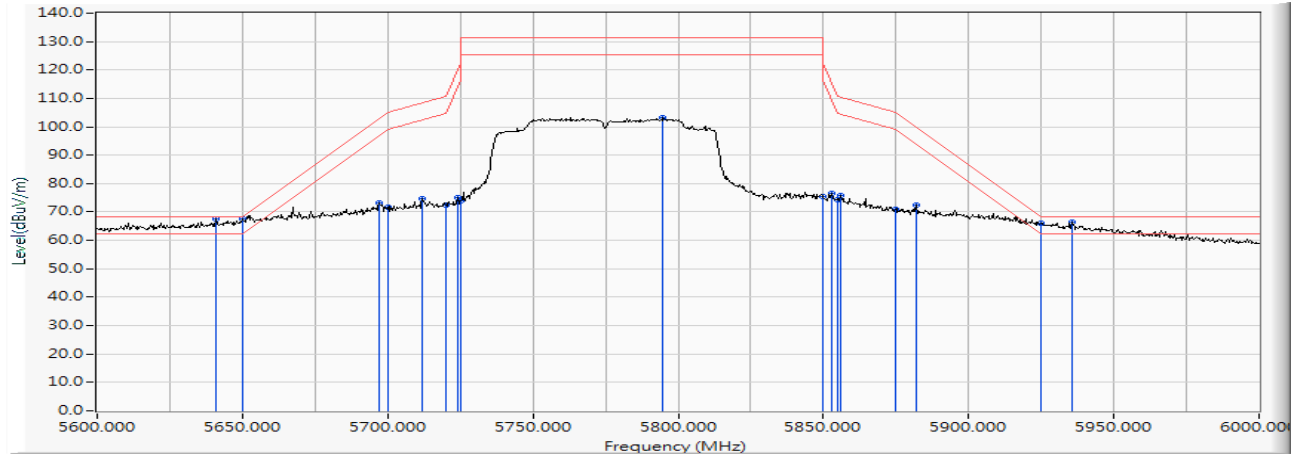

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5640.800	16.422	51.323	67.745	-0.475	68.220	PEAK
2		5650.000	16.447	51.134	67.581	-0.639	68.220	PEAK
3		5697.200	16.498	56.715	73.213	-29.916	103.129	PEAK
4		5700.000	16.502	55.003	71.505	-33.695	105.200	PEAK
5		5712.000	16.520	58.276	74.795	-33.765	108.560	PEAK
6		5720.000	16.535	56.065	72.600	-38.200	110.800	PEAK
7		5724.000	16.543	58.634	75.176	-44.744	119.920	PEAK
8		5725.000	16.544	57.245	73.789	-48.411	122.200	PEAK
9	*	5794.800	16.646	86.555	103.201	--	--	PEAK
10		5850.000	16.748	58.610	75.358	-46.842	122.200	PEAK
11		5852.800	16.753	59.821	76.574	-39.242	115.816	PEAK
12		5855.000	16.758	57.495	74.253	-36.547	110.800	PEAK
13		5856.000	16.761	58.982	75.743	-34.777	110.520	PEAK
14		5875.000	16.807	54.262	71.070	-34.130	105.200	PEAK
15		5882.000	16.827	55.490	72.317	-27.703	100.020	PEAK
16		5925.000	16.920	49.117	66.037	-2.163	68.200	PEAK
17		5935.600	16.931	49.427	66.358	-1.842	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 5 SISO A: Transmit (802.11ac-160BW_65Mbps)-Channel 50 (5250MHz)

Horizontal

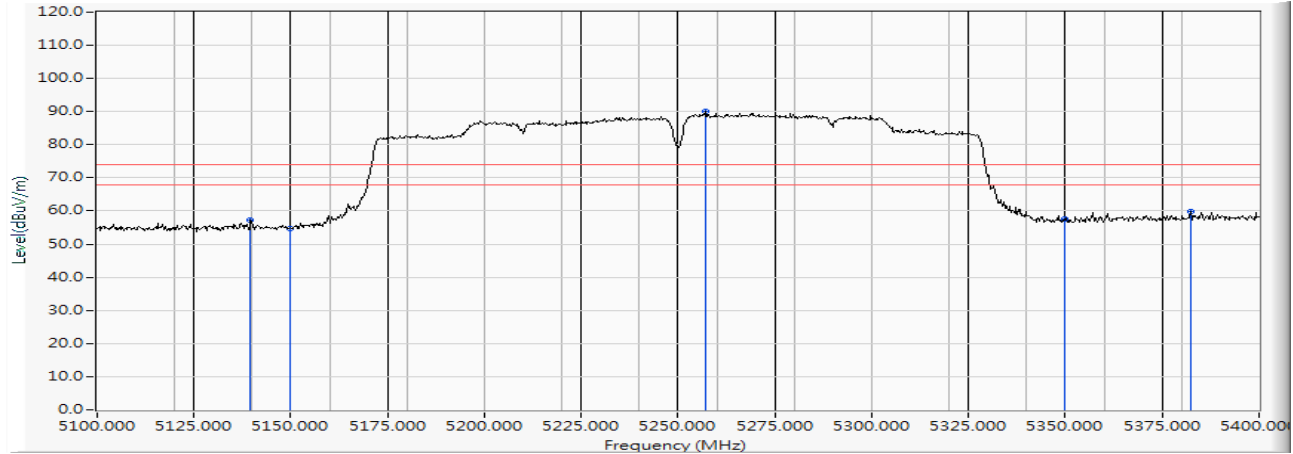


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5139.600	15.249	41.944	57.192	-16.808	74.000	PEAK
2		5150.000	15.307	39.373	54.680	-19.320	74.000	PEAK
3	*	5257.200	15.698	74.282	89.980	--	--	PEAK
4		5350.000	15.912	41.577	57.489	-16.511	74.000	PEAK
5		5382.300	16.006	43.880	59.886	-14.114	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 5 SISO A: Transmit (802.11ac-160BW_65Mbps)-Channel 50 (5250MHz)

Horizontal

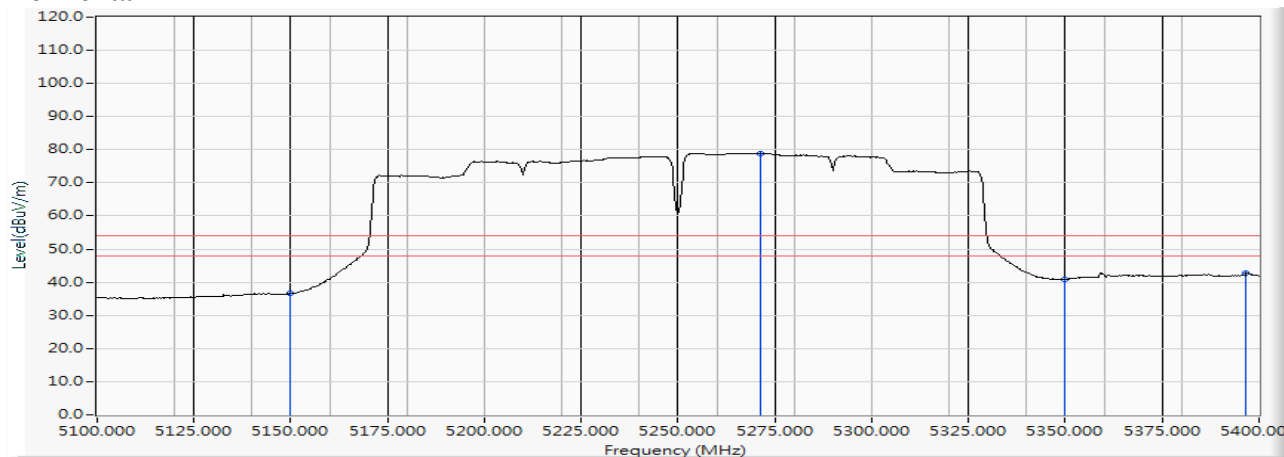


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	21.296	36.603	-17.397	54.000	AVERAGE
2	*	5271.300	15.727	63.251	78.978	--	--	AVERAGE
3		5350.000	15.912	25.041	40.953	-13.047	54.000	AVERAGE
4		5396.700	16.025	26.875	42.900	-11.100	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 5 SISO A: Transmit (802.11ac-160BW_65Mbps)-Channel 50 (5250MHz)

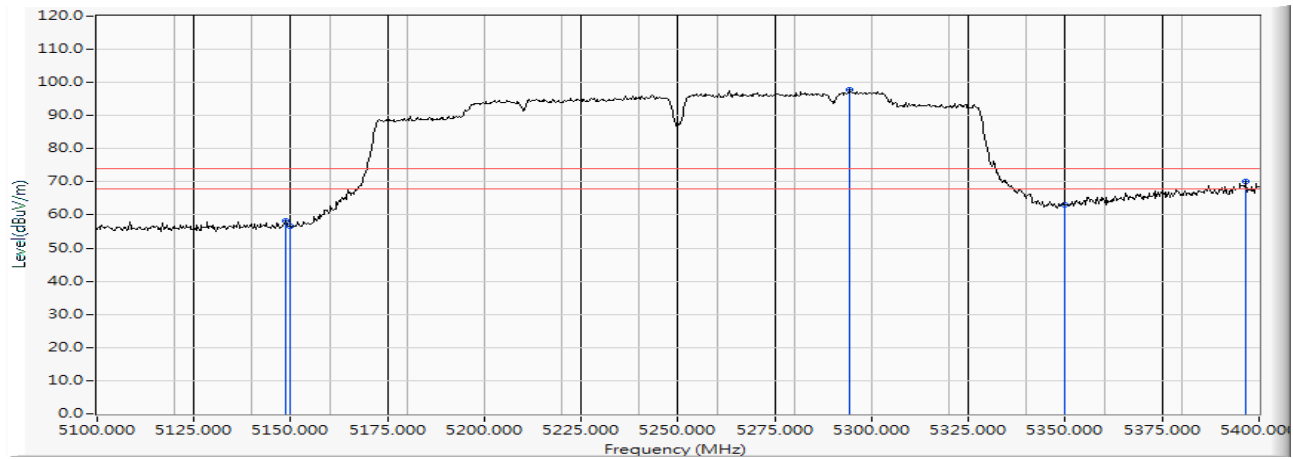
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5148.600	15.299	43.040	58.339	-15.661	74.000	PEAK
2		5150.000	15.307	41.171	56.478	-17.522	74.000	PEAK
3	*	5294.400	15.782	81.872	97.654	--	--	PEAK
4		5350.000	15.912	47.123	63.035	-10.965	74.000	PEAK
5		5396.700	16.025	54.135	70.160	-3.840	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 5 SISO A: Transmit (802.11ac-160BW_65Mbps)-Channel 50 (5250MHz)

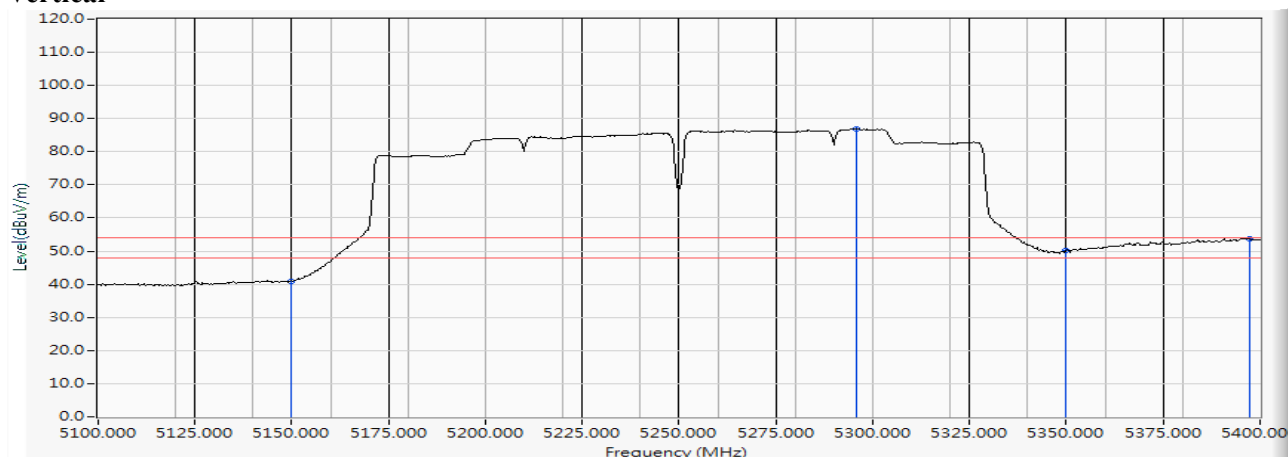Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	25.694	41.001	-12.999	54.000	AVERAGE
2	*	5295.900	15.786	71.123	86.909	--	--	AVERAGE
3		5350.000	15.912	34.149	50.061	-3.939	54.000	AVERAGE
4		5397.300	16.026	37.827	53.852	-0.148	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 5 SISO A: Transmit (802.11ac-160BW_65Mbps)-Channel 114 (5570MHz)

Horizontal

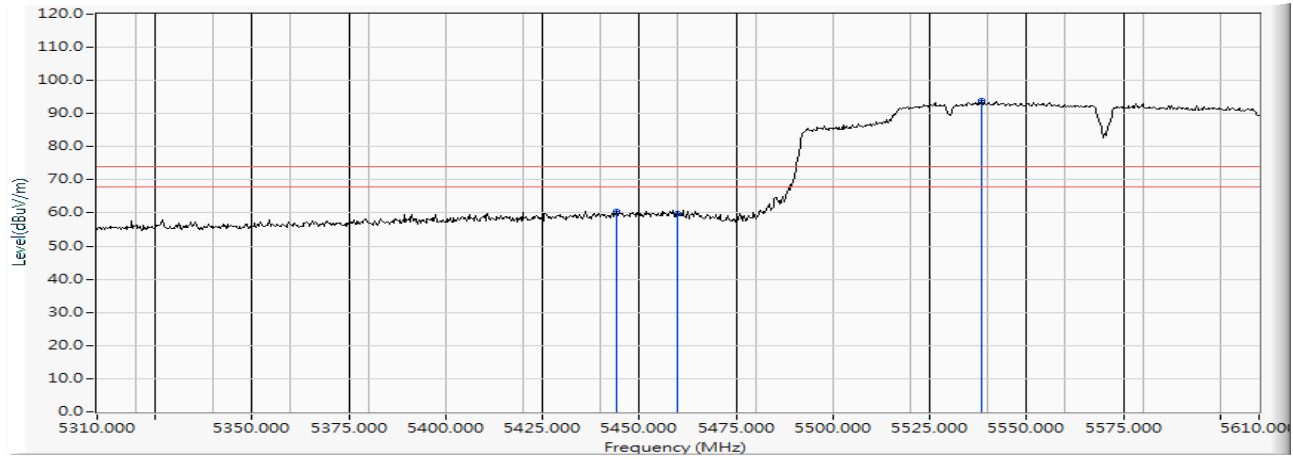


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5444.100	16.138	44.502	60.640	-13.360	74.000	PEAK
2		5460.000	16.185	43.591	59.776	-14.224	74.000	PEAK
3	*	5538.300	16.317	77.678	93.995	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 5 SISO A: Transmit (802.11ac-160BW_65Mbps)-Channel 114 (5570MHz)

Horizontal

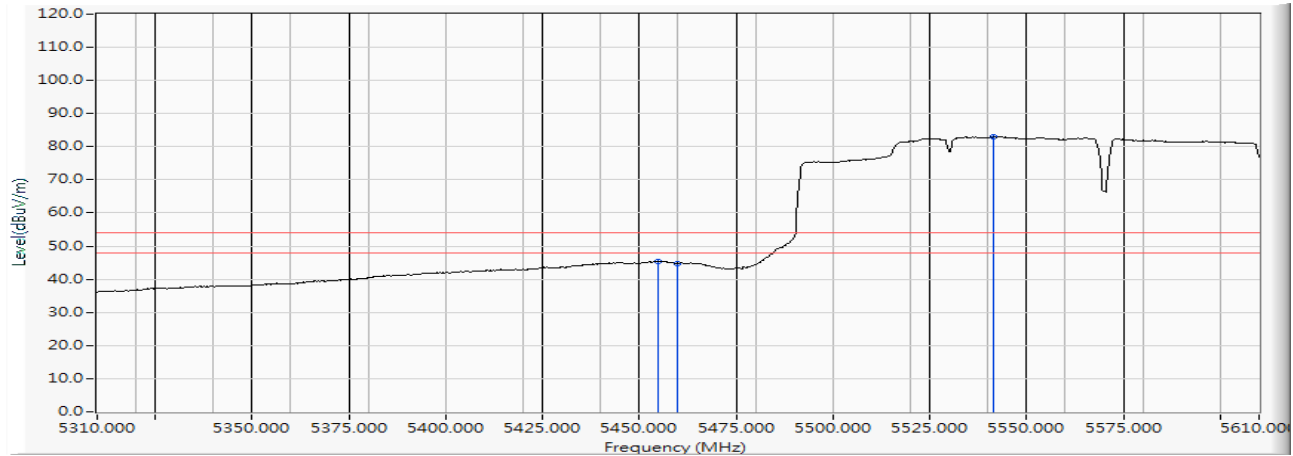


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5454.900	16.174	29.274	45.447	-8.553	54.000	AVERAGE
2		5460.000	16.185	28.508	44.693	-9.307	54.000	AVERAGE
3	*	5541.600	16.319	66.641	82.961	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 5 SISO A: Transmit (802.11ac-160BW_65Mbps)-Channel 114 (5570MHz)

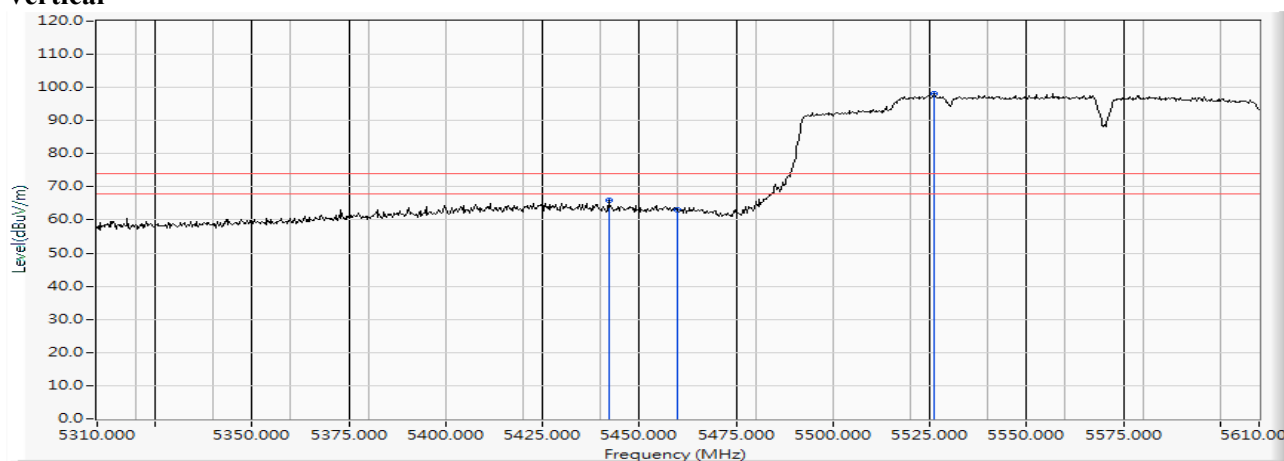
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5442.000	16.131	49.793	65.924	-8.076	74.000	PEAK
2		5460.000	16.185	46.714	62.899	-11.101	74.000	PEAK
3	*	5526.000	16.303	81.903	98.206	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 5 SISO A: Transmit (802.11ac-160BW_65Mbps)-Channel 114 (5570MHz)

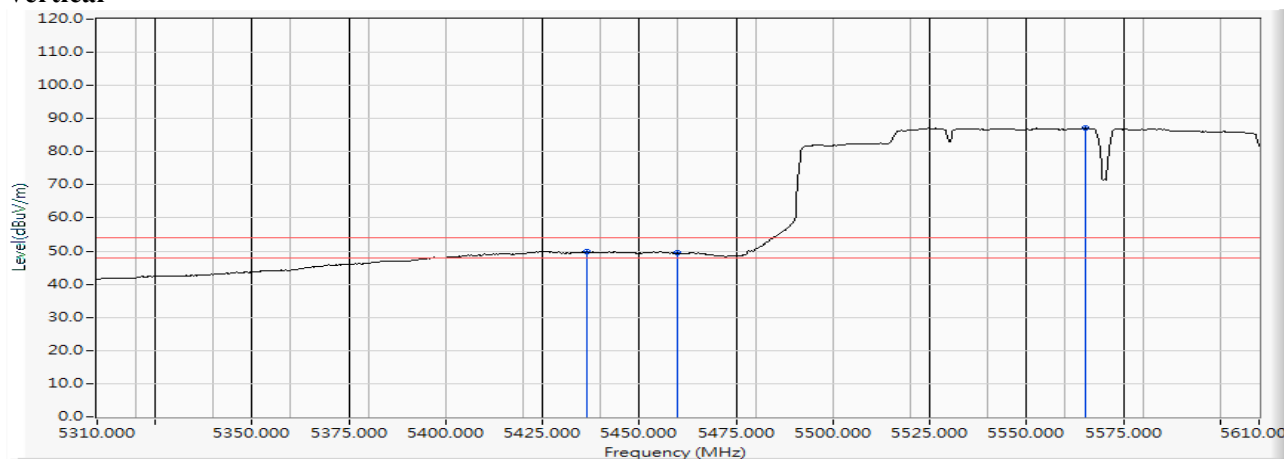Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5436.300	16.116	33.778	49.894	-4.106	54.000	AVERAGE
2		5460.000	16.185	33.264	49.449	-4.551	54.000	AVERAGE
3	*	5565.000	16.326	70.797	87.123	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 5 SISO A: Transmit (802.11ac-160BW_65Mbps)-Channel 114 (5570MHz)

Horizontal

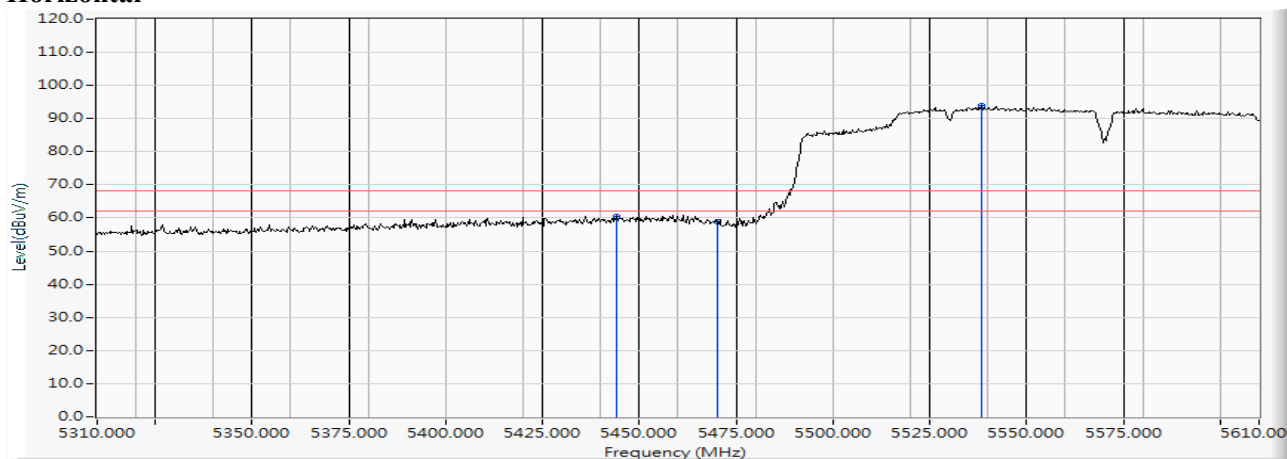

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5444.100	16.138	44.502	60.640	-7.580	68.220	PEAK
2		5470.000	16.200	42.785	58.985	-9.235	68.220	PEAK
3	*	5538.300	16.317	77.678	93.995	--	--	PEAK


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 5 SISO A: Transmit (802.11ac-160BW_65Mbps)-Channel 114 (5570MHz)

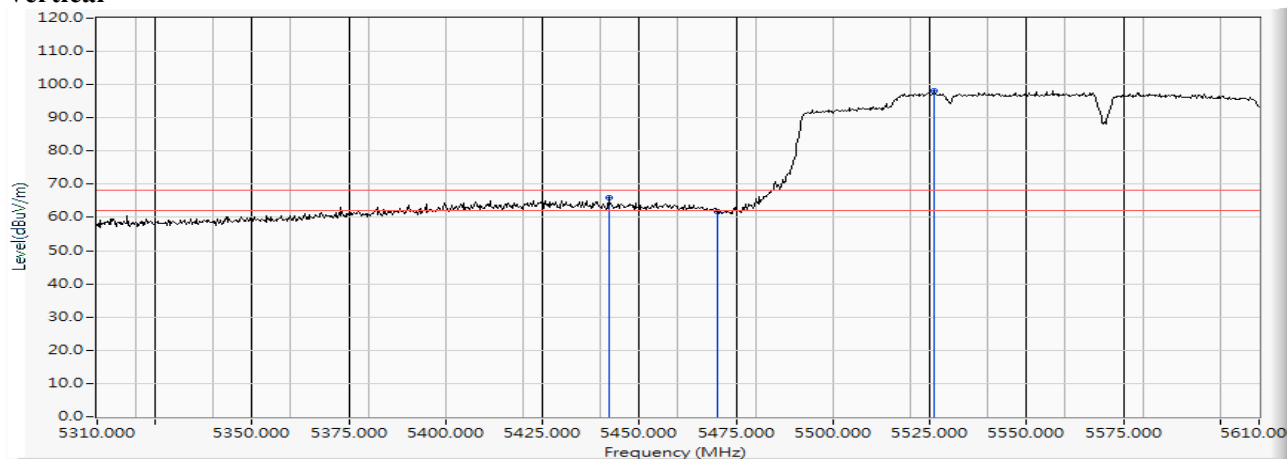Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5442.000	16.131	49.793	65.924	-2.296	68.220	PEAK
2		5470.000	16.200	45.621	61.821	-6.399	68.220	PEAK
3	*	5526.000	16.303	81.903	98.206	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 10 SISO B: Transmit (802.11a_6Mbps)-Channel 36 (5180MHz)

Horizontal

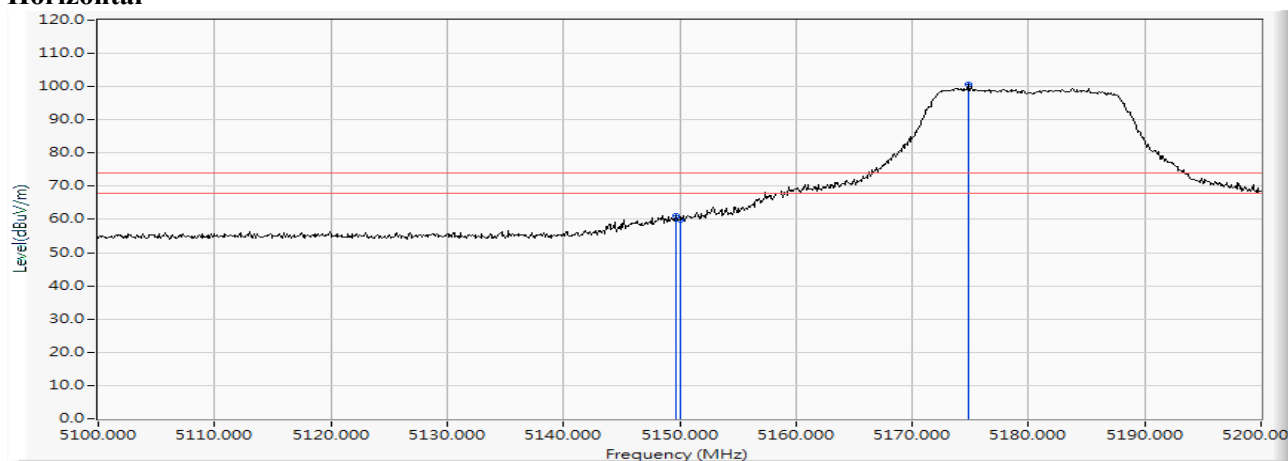


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5149.700	15.305	45.929	61.234	-12.766	74.000	PEAK
2		5150.000	15.307	44.382	59.689	-14.311	74.000	PEAK
3	*	5174.800	15.369	85.224	100.593	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 10 SISO B: Transmit (802.11a_6Mbps)-Channel 36 (5180MHz)

Horizontal

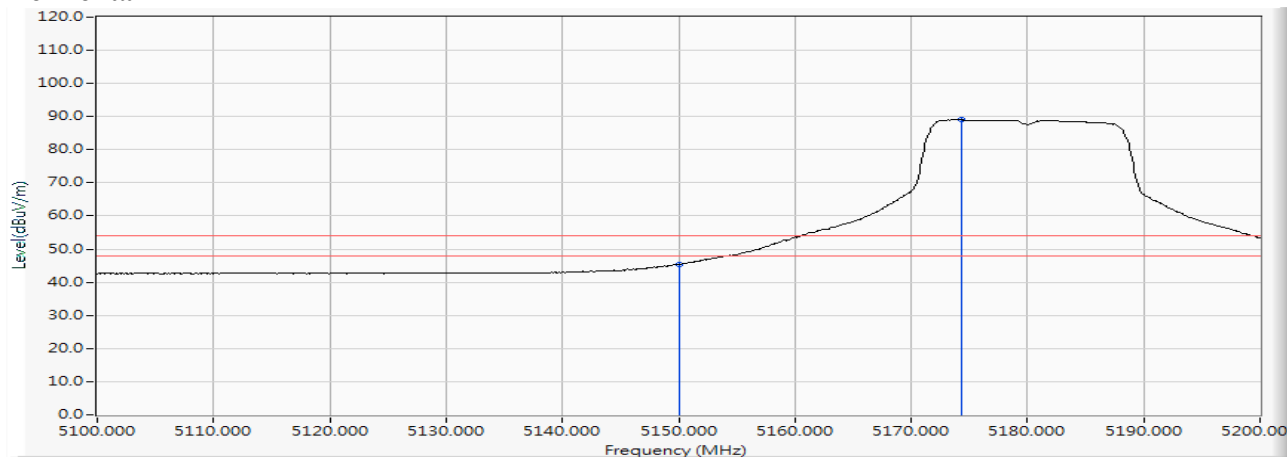


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	30.131	45.438	-8.562	54.000	AVERAGE
2	*	5174.300	15.367	73.724	89.091	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 10 SISO B: Transmit (802.11a_6Mbps)-Channel 36 (5180MHz)

Vertical

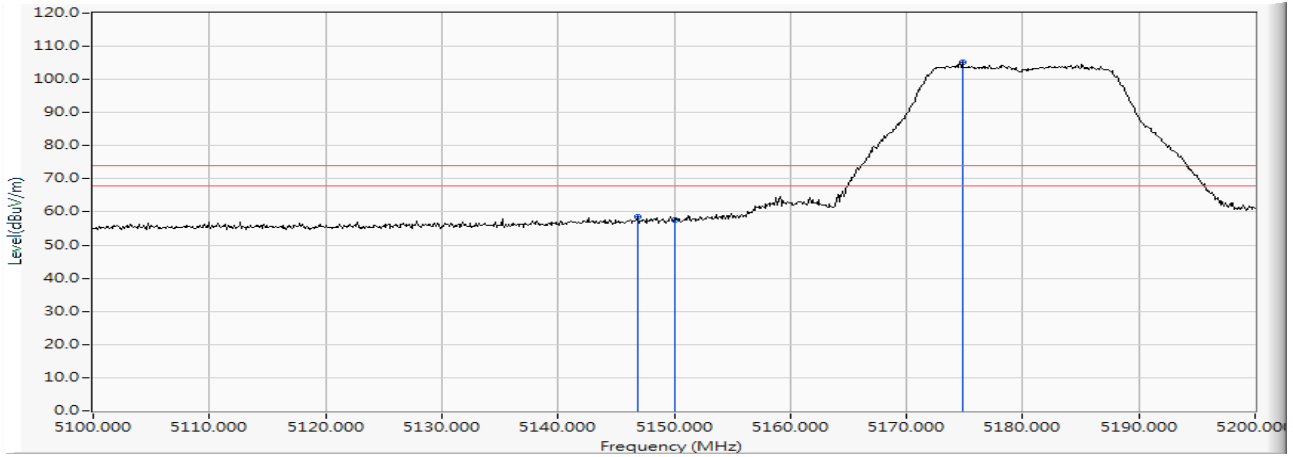


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5146.900	15.289	43.385	58.674	-15.326	74.000	PEAK
2		5150.000	15.307	42.126	57.433	-16.567	74.000	PEAK
3	*	5174.800	15.369	89.794	105.163	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 10 SISO B: Transmit (802.11a_6Mbps)-Channel 36 (5180MHz)

Vertical

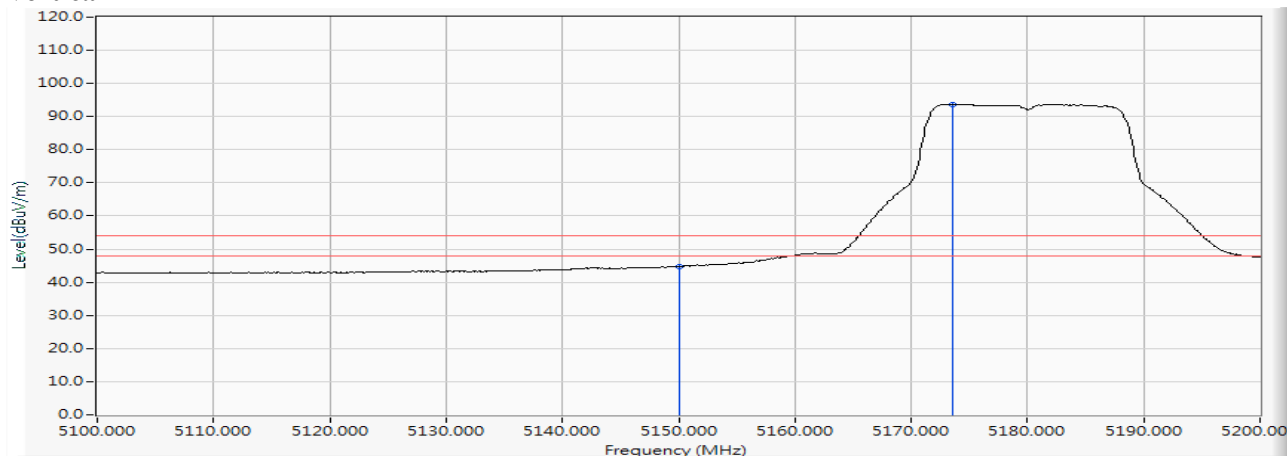


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	29.465	44.772	-9.228	54.000	AVERAGE
2	*	5173.600	15.364	78.357	93.721	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 10 SISO B: Transmit (802.11a_6Mbps)-Channel 64 (5320MHz)

Horizontal

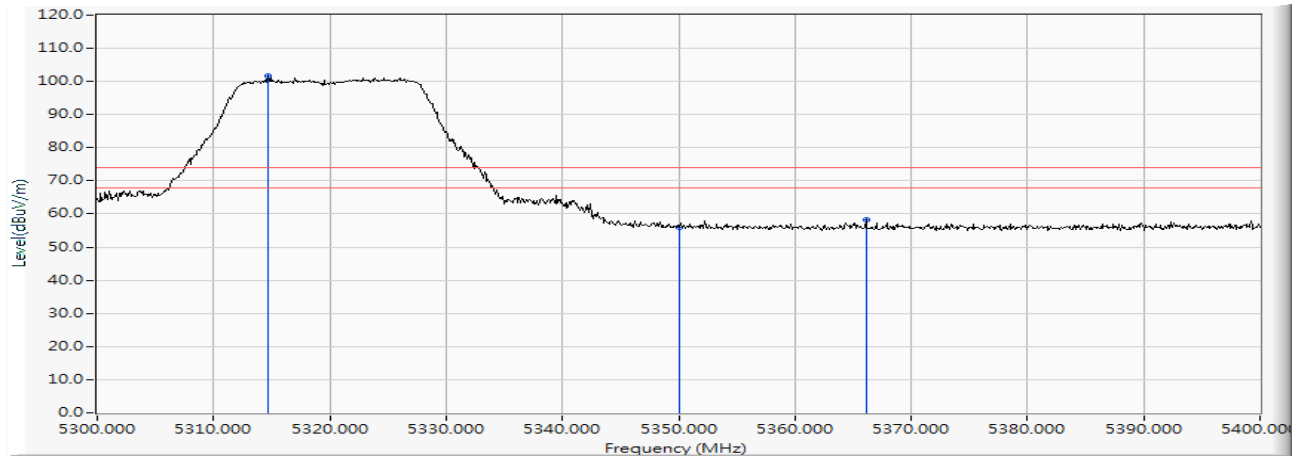


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5314.700	15.832	85.798	101.631	--	--	PEAK
2		5350.000	15.912	40.117	56.029	-17.971	74.000	PEAK
3		5366.100	15.963	42.255	58.218	-15.782	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 10 SISO B: Transmit (802.11a_6Mbps)-Channel 64 (5320MHz)

Horizontal

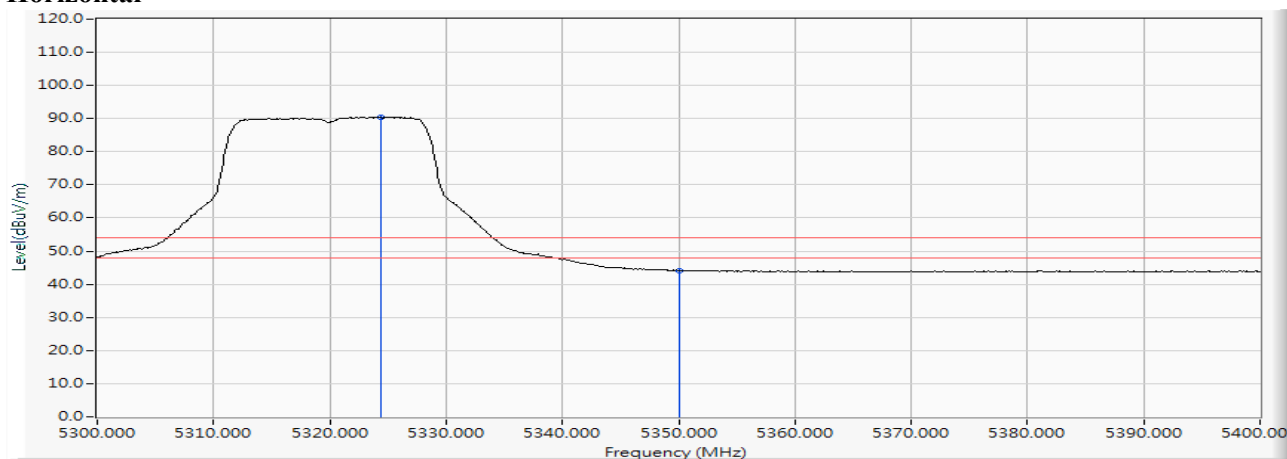


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5324.400	15.864	74.652	90.516	--	--	AVERAGE
2		5350.000	15.912	28.283	44.195	-9.805	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 10 SISO B: Transmit (802.11a_6Mbps)-Channel 64 (5320MHz)

Vertical

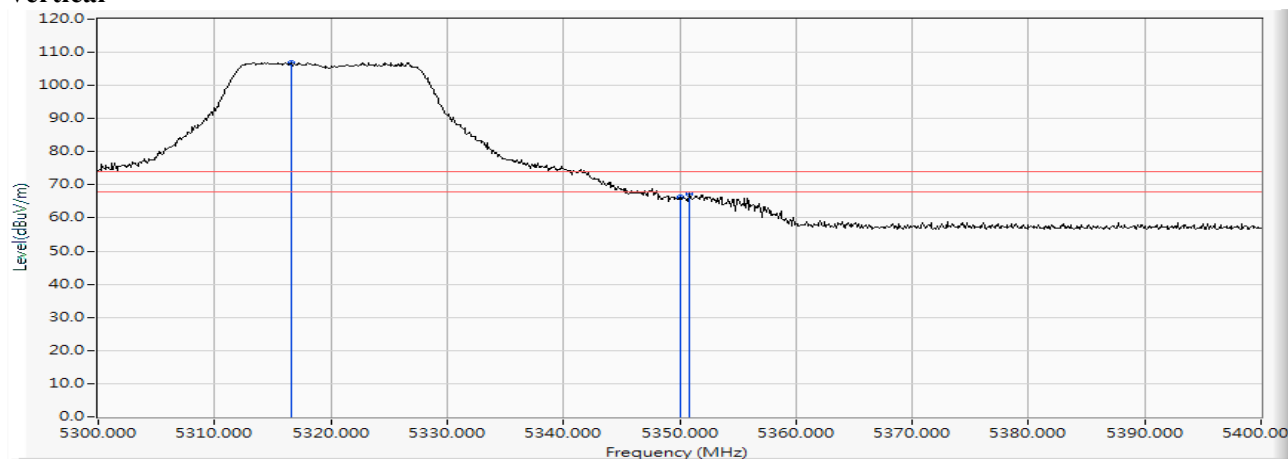


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5316.600	15.839	91.130	106.969	--	--	PEAK
2		5350.000	15.912	50.463	66.375	-7.625	74.000	PEAK
3		5350.800	15.915	51.365	67.280	-6.720	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 10 SISO B: Transmit (802.11a_6Mbps)-Channel 64 (5320MHz)

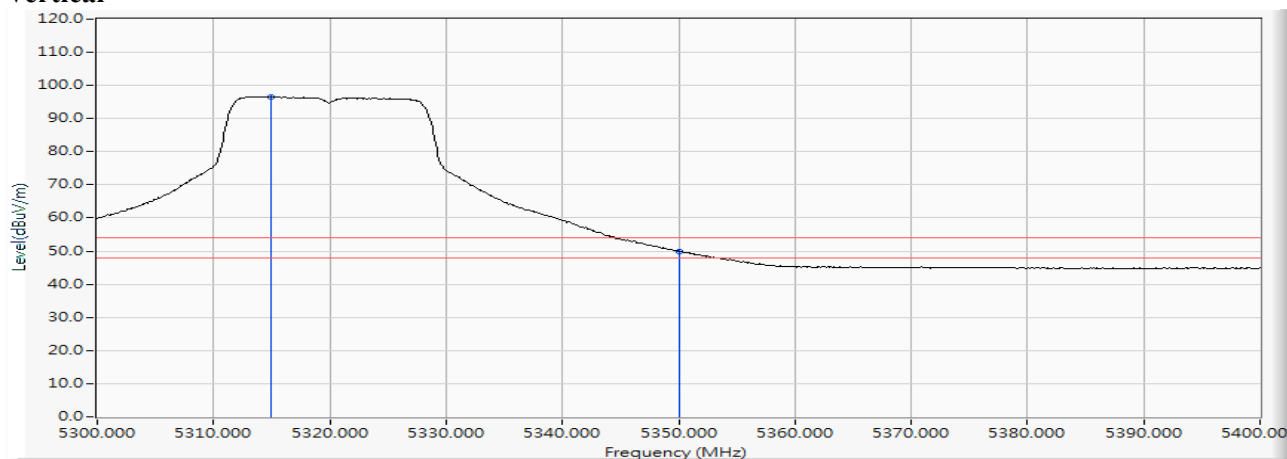Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5314.900	15.834	80.787	96.620	--	--	AVERAGE
2		5350.000	15.912	34.047	49.959	-4.041	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 10 SISO B: Transmit (802.11a_6Mbps)-Channel 100 (5500MHz)

Horizontal

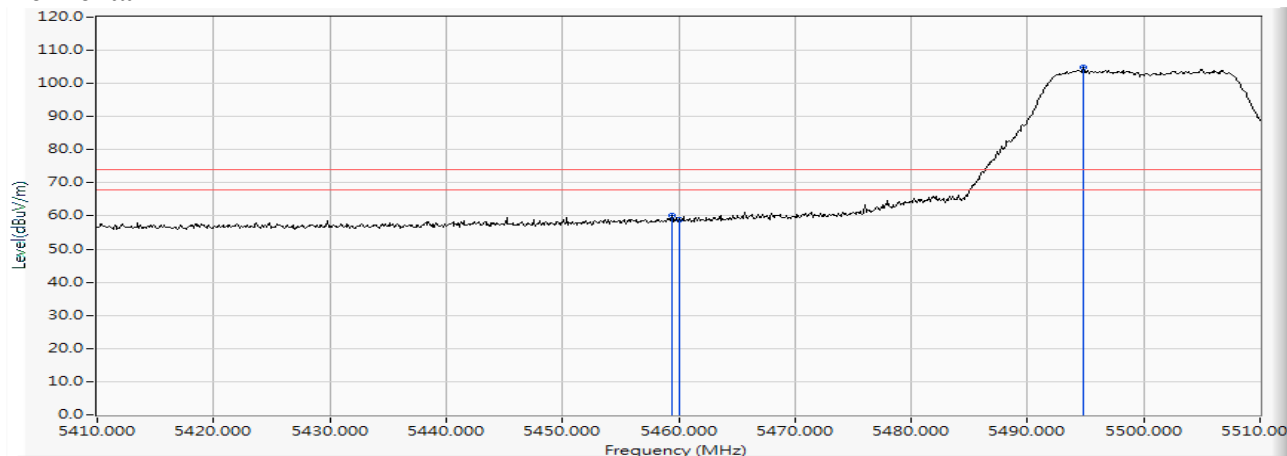


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5459.400	16.184	43.926	60.110	-13.890	74.000	PEAK
2		5460.000	16.185	42.702	58.887	-15.113	74.000	PEAK
3	*	5494.800	16.263	88.590	104.853	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 10 SISO B: Transmit (802.11a_6Mbps)-Channel 100 (5500MHz)

Horizontal

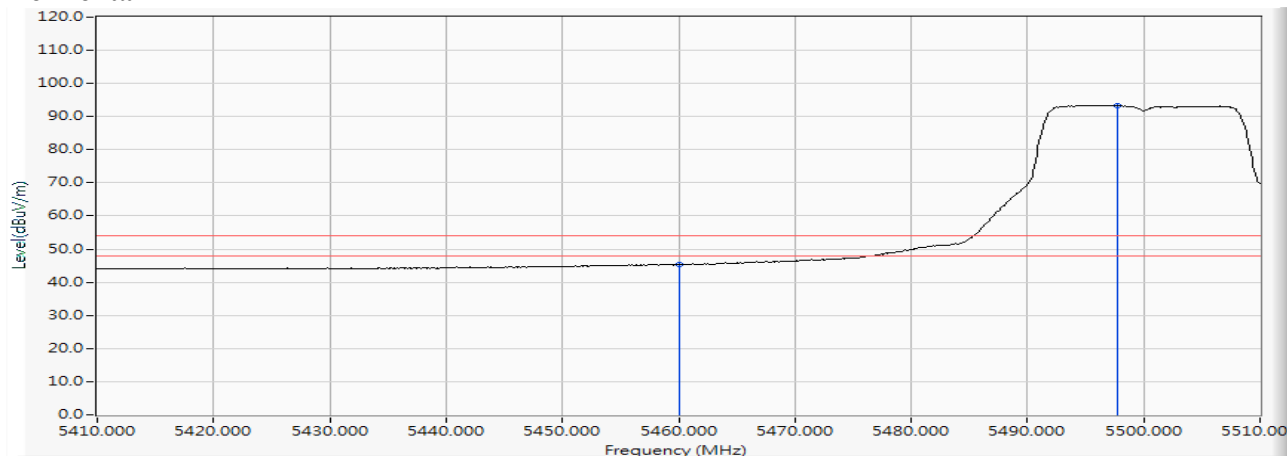


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5460.000	16.185	29.206	45.391	-8.609	54.000	AVERAGE
2	*	5497.800	16.266	77.114	93.381	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 10 SISO B: Transmit (802.11a_6Mbps)-Channel 100 (5500MHz)

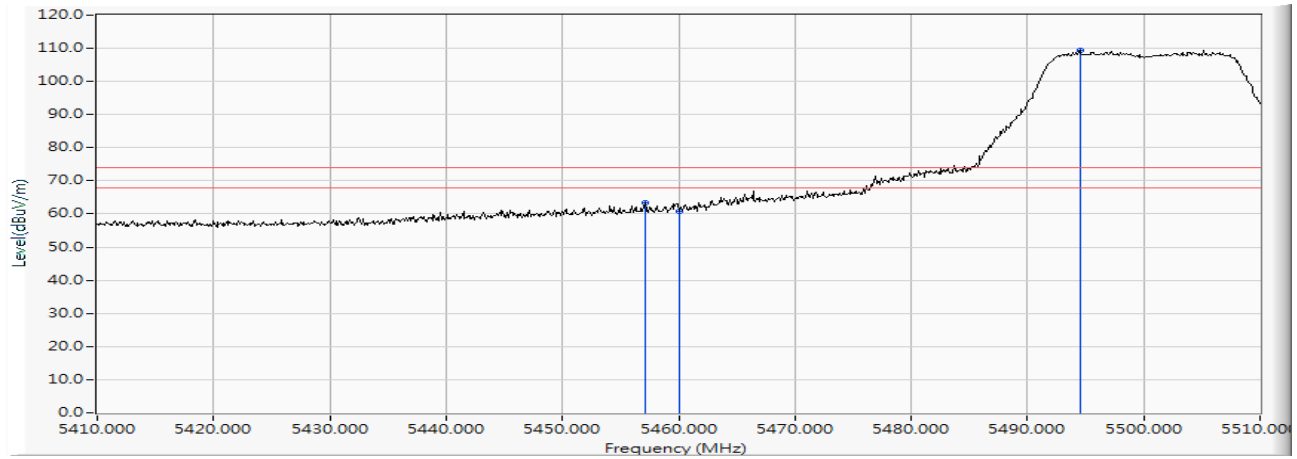
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5457.100	16.180	47.103	63.283	-10.717	74.000	PEAK
2		5460.000	16.185	44.733	60.918	-13.082	74.000	PEAK
3	*	5494.500	16.262	93.229	109.492	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 10 SISO B: Transmit (802.11a_6Mbps)-Channel 100 (5500MHz)

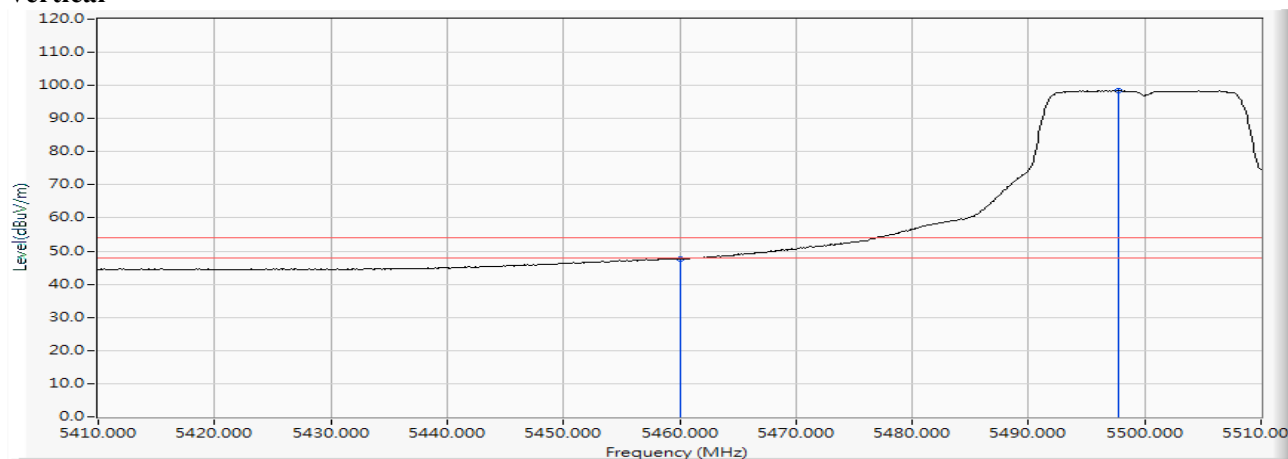Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5460.000	16.185	31.497	47.682	-6.318	54.000	AVERAGE
2	*	5497.700	16.267	82.197	98.464	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 10 SISO B: Transmit (802.11a_6Mbps)-Channel 100 (5500MHz)

Horizontal

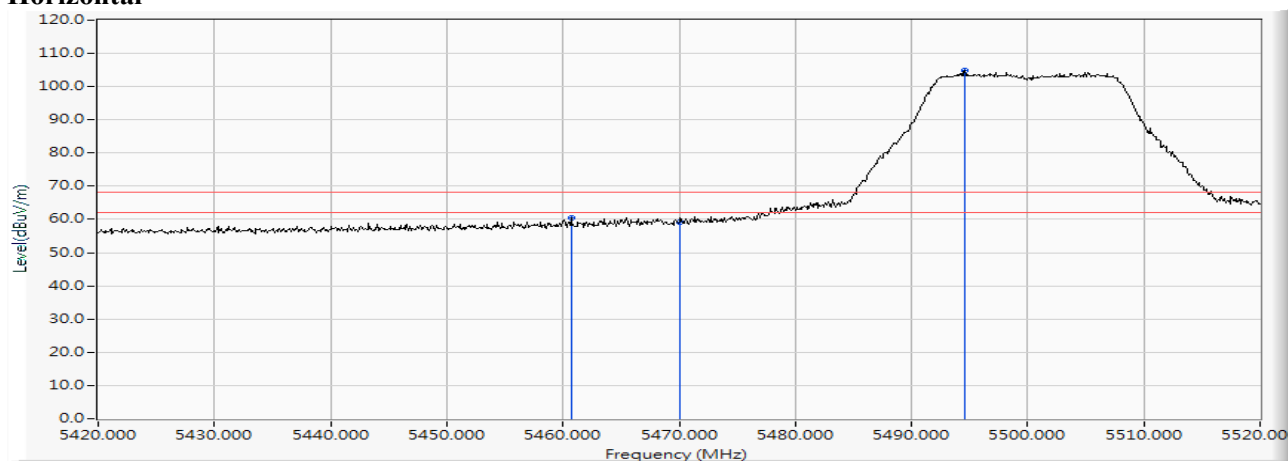

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5460.700	16.186	44.204	60.390	-7.830	68.220	PEAK
2		5470.000	16.200	42.983	59.183	-9.037	68.220	PEAK
3	*	5494.600	16.262	88.638	104.901	--	--	PEAK


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 10 SISO B: Transmit (802.11a_6Mbps)-Channel 100 (5500MHz)

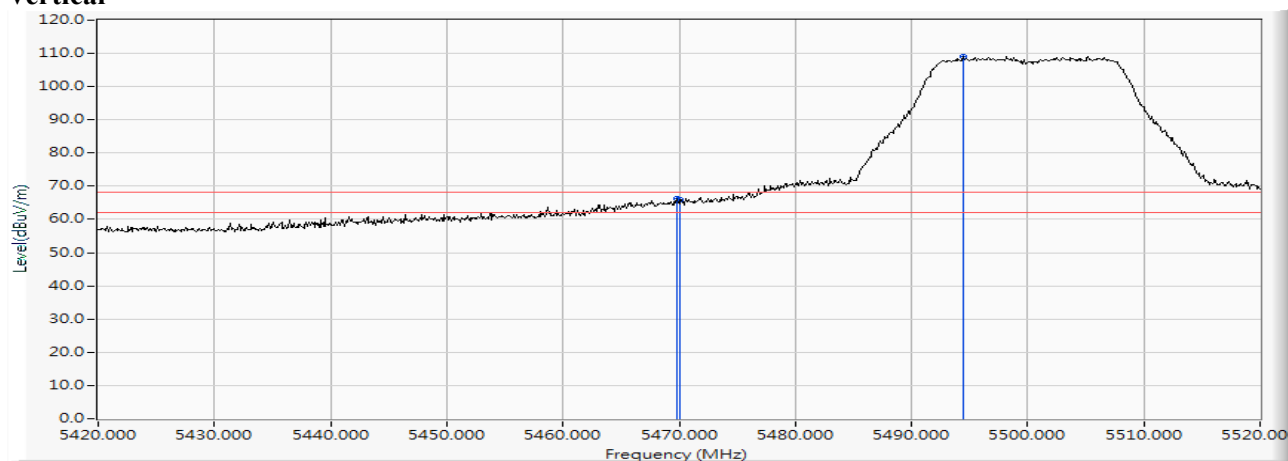Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5469.800	16.200	49.922	66.121	-2.099	68.220	PEAK
2		5470.000	16.200	49.842	66.042	-2.178	68.220	PEAK
3	*	5494.400	16.262	92.774	109.037	--	--	PEAK


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 10 SISO B: Transmit (802.11a_6Mbps)-Channel 140 (5700MHz)

Horizontal

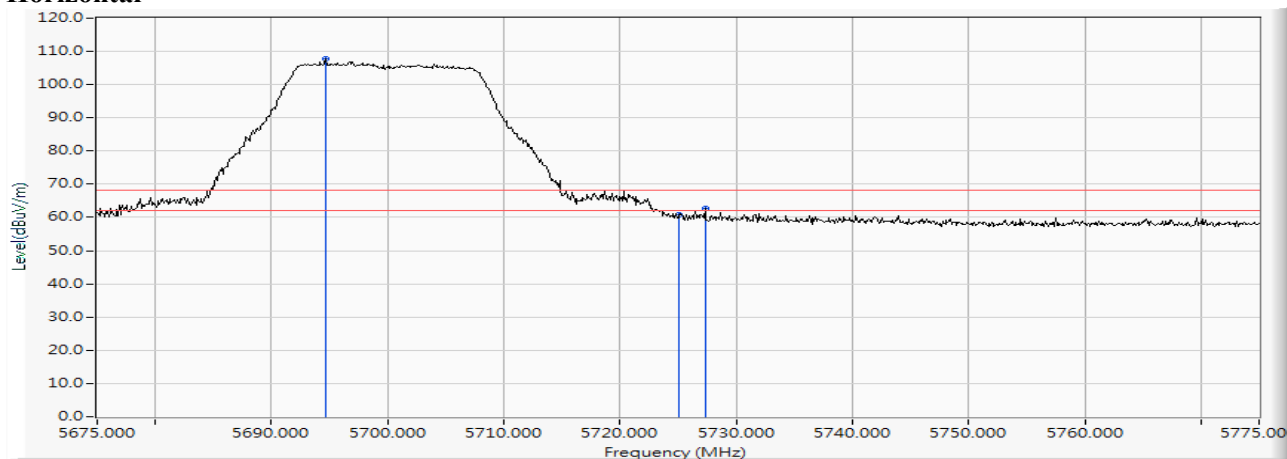

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5694.700	16.494	91.372	107.867	--	--	PEAK
2		5725.000	16.544	44.105	60.649	-7.571	68.220	PEAK
3		5727.300	16.548	46.156	62.703	-5.517	68.220	PEAK


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 10 SISO B: Transmit (802.11a_6Mbps)-Channel 140 (5700MHz)

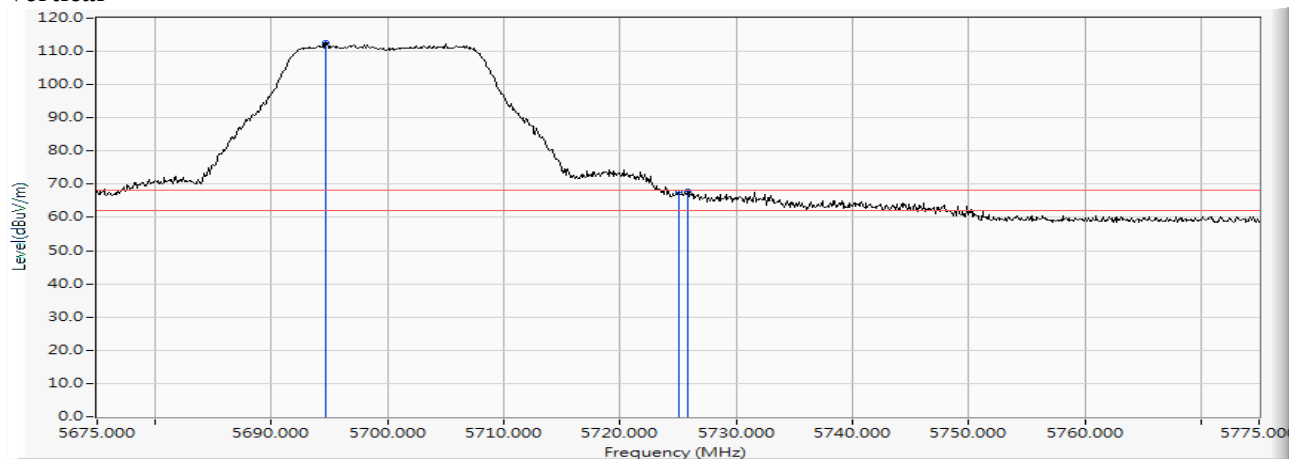Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5694.700	16.494	96.230	112.725	--	--	PEAK
2		5725.000	16.544	50.933	67.477	-0.743	68.220	PEAK
3		5725.800	16.546	51.478	68.024	-0.196	68.220	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 10 SISO B: Transmit (802.11a_6Mbps)-Channel 149 (5745MHz)


Horizontal

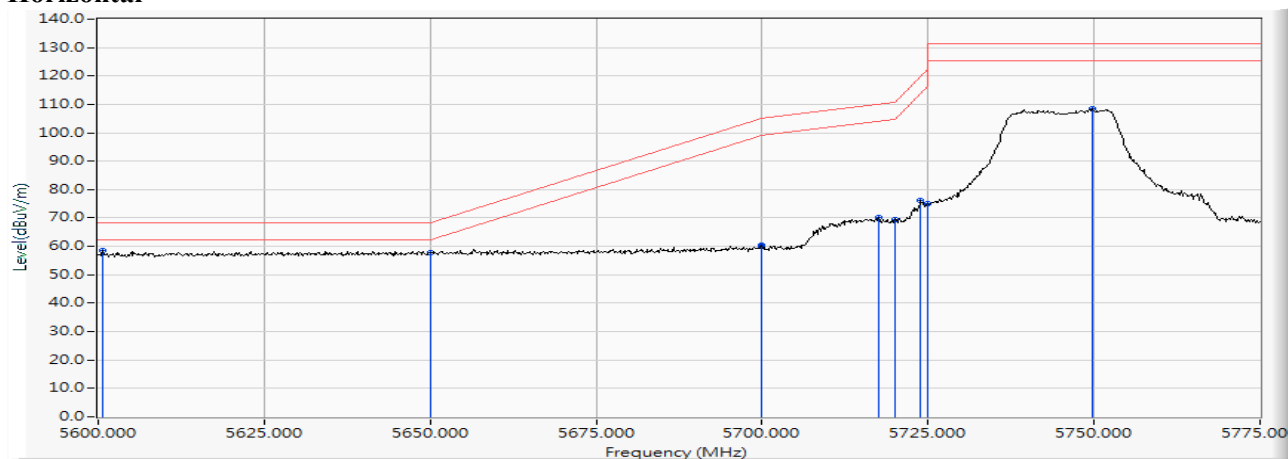

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5600.700	16.385	42.265	58.649	-9.571	68.220	PEAK
2		5650.000	16.447	41.198	57.645	-10.575	68.220	PEAK
3		5699.925	16.502	43.774	60.276	-44.869	105.145	PEAK
4		5700.000	16.502	43.476	59.978	-45.222	105.200	PEAK
5		5717.600	16.530	53.704	70.234	-39.894	110.128	PEAK
6		5720.000	16.535	52.804	69.339	-41.461	110.800	PEAK
7		5723.900	16.543	59.680	76.222	-43.470	119.692	PEAK
8		5725.000	16.544	58.380	74.924	-47.276	122.200	PEAK
9	*	5749.800	16.567	91.781	108.349			PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 10 SISO B: Transmit (802.11a_6Mbps)-Channel 149 (5745MHz)


Vertical

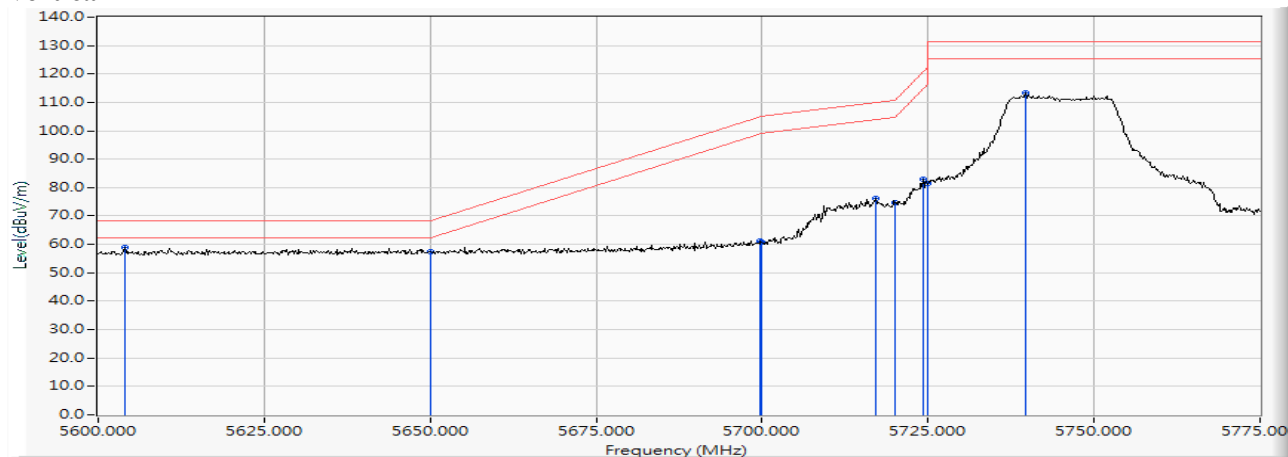

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5604.025	16.387	42.469	58.857	-9.363	68.220	PEAK
2		5650.000	16.447	40.942	57.389	-10.831	68.220	PEAK
3		5699.750	16.502	44.642	61.143	-43.872	105.015	PEAK
4		5700.000	16.502	44.210	60.712	-44.488	105.200	PEAK
5		5717.075	16.530	59.544	76.073	-33.908	109.981	PEAK
6		5720.000	16.535	58.239	74.774	-36.026	110.800	PEAK
7		5724.250	16.543	66.261	82.804	-37.686	120.490	PEAK
8		5725.000	16.544	64.885	81.429	-40.771	122.200	PEAK
9		5739.650	16.556	96.836	113.392	--	--	PEAK


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 10 SISO B: Transmit (802.11a_6Mbps)-Channel 165 (5825MHz)

Horizontal

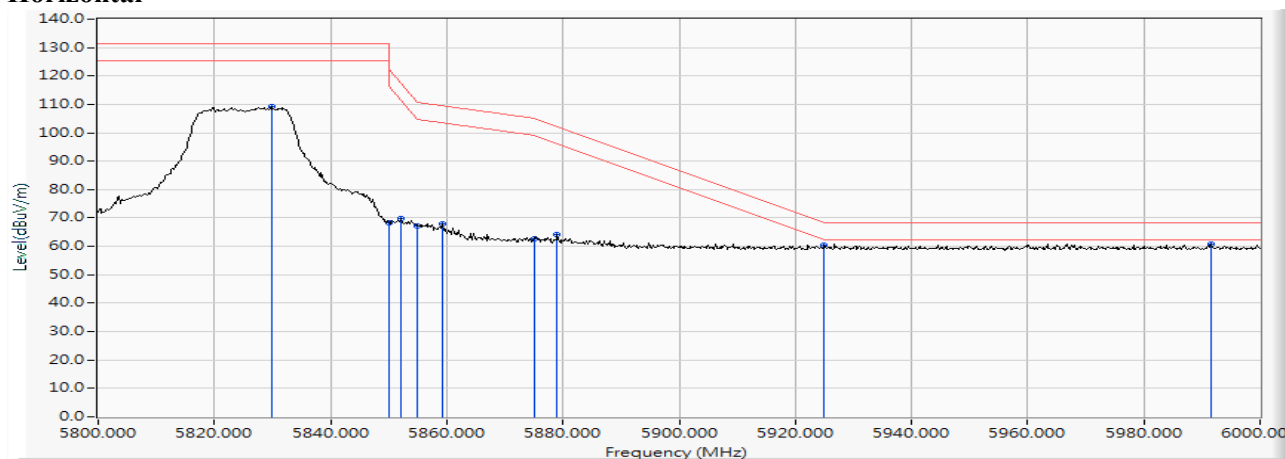

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5829.800	16.719	92.404	109.122	--	--	PEAK
2		5850.000	16.748	51.699	68.447	-53.753	122.200	PEAK
3		5852.200	16.751	53.003	69.755	-47.429	117.184	PEAK
4		5855.000	16.758	50.397	67.155	-43.645	110.800	PEAK
5		5859.200	16.768	51.009	67.777	-41.847	109.624	PEAK
6		5875.000	16.807	45.891	62.699	-42.501	105.200	PEAK
7		5879.000	16.818	47.477	64.296	-37.944	102.240	PEAK
8		5925.000	16.920	43.323	60.243	-7.957	68.200	PEAK
9		5991.600	17.038	43.750	60.788	-7.412	68.200	PEAK


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 10 SISO B: Transmit (802.11a_6Mbps)-Channel 165 (5825MHz)

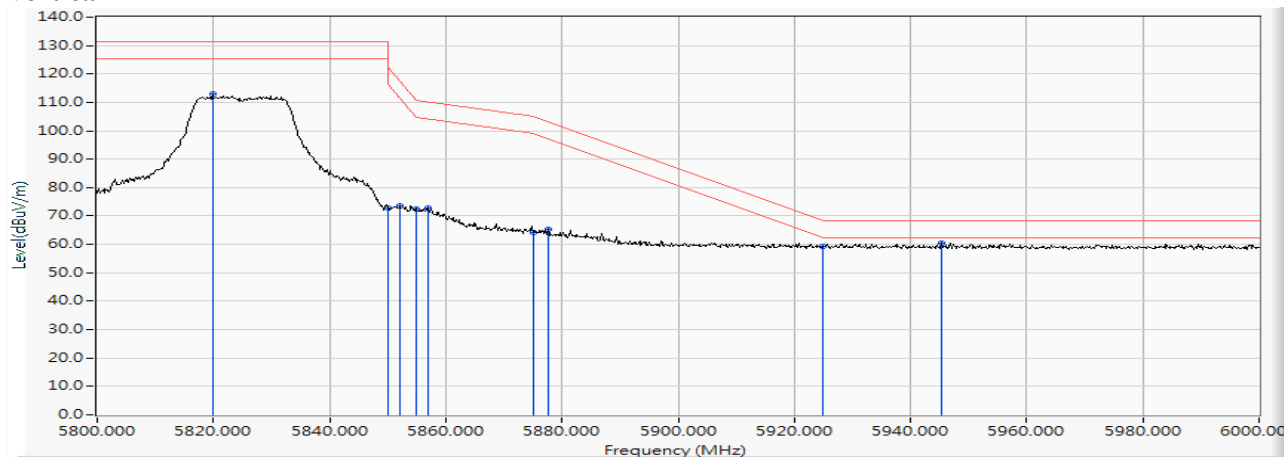Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5819.800	16.705	96.324	113.028	--	--	PEAK
2		5850.000	16.748	55.979	72.727	-49.473	122.200	PEAK
3		5852.200	16.751	56.998	73.750	-43.434	117.184	PEAK
4		5855.000	16.758	55.704	72.462	-38.338	110.800	PEAK
5		5857.000	16.763	56.230	72.993	-37.247	110.240	PEAK
6		5875.000	16.807	47.434	64.242	-40.958	105.200	PEAK
7		5877.600	16.815	48.484	65.299	-37.977	103.276	PEAK
8		5925.000	16.920	42.380	59.300	-8.900	68.200	PEAK
9		5945.400	16.945	43.330	60.275	-7.925	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps)-Channel 36 (5180MHz)

Horizontal

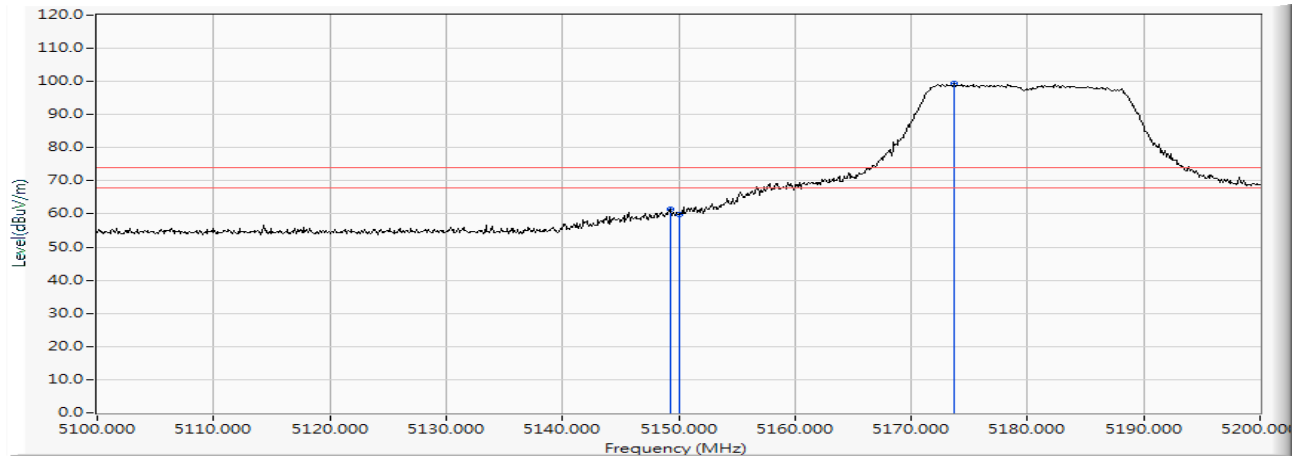


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5149.300	15.303	46.099	61.402	-12.598	74.000	PEAK
2		5150.000	15.307	44.644	59.951	-14.049	74.000	PEAK
3	*	5173.700	15.364	83.913	99.277	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps)-Channel 36 (5180MHz)

Horizontal

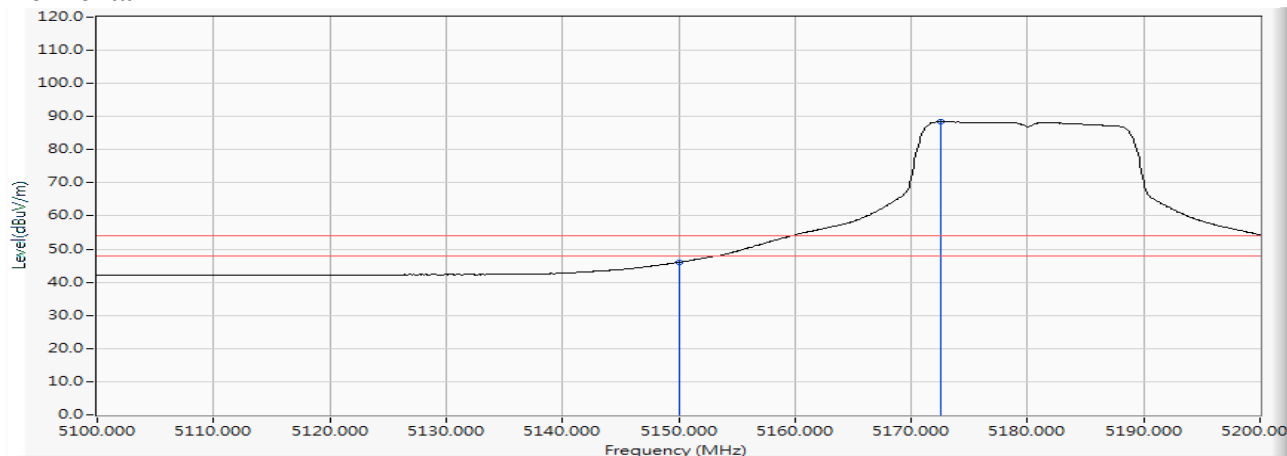


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	30.702	46.009	-7.991	54.000	AVERAGE
2	*	5172.600	15.359	73.023	88.382	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps)-Channel 36 (5180MHz)

Vertical

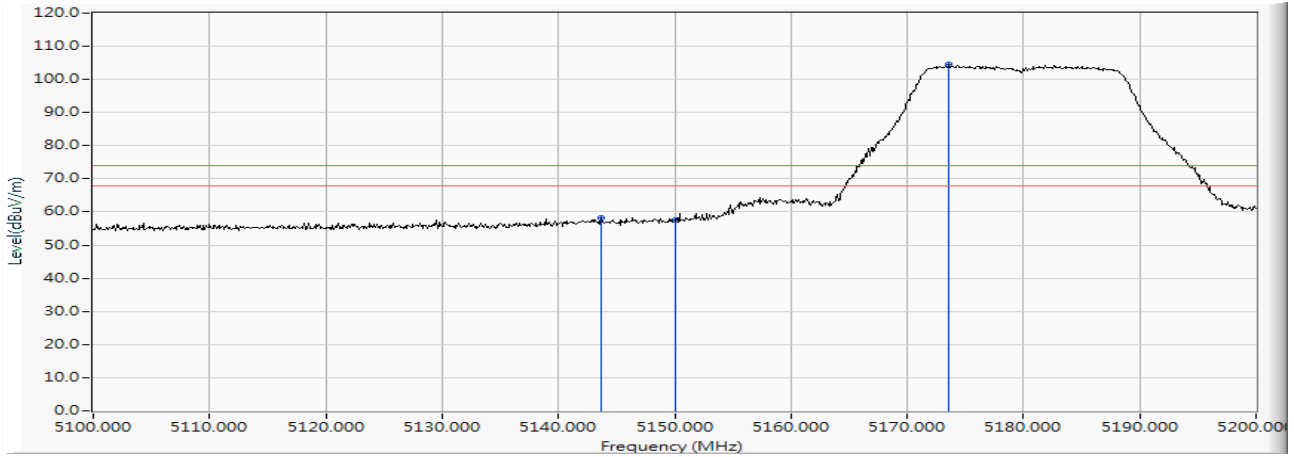


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5143.700	15.270	42.813	58.084	-15.916	74.000	PEAK
2		5150.000	15.307	42.304	57.611	-16.389	74.000	PEAK
3	*	5173.600	15.364	89.042	104.406	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps)-Channel 36 (5180MHz)

Vertical

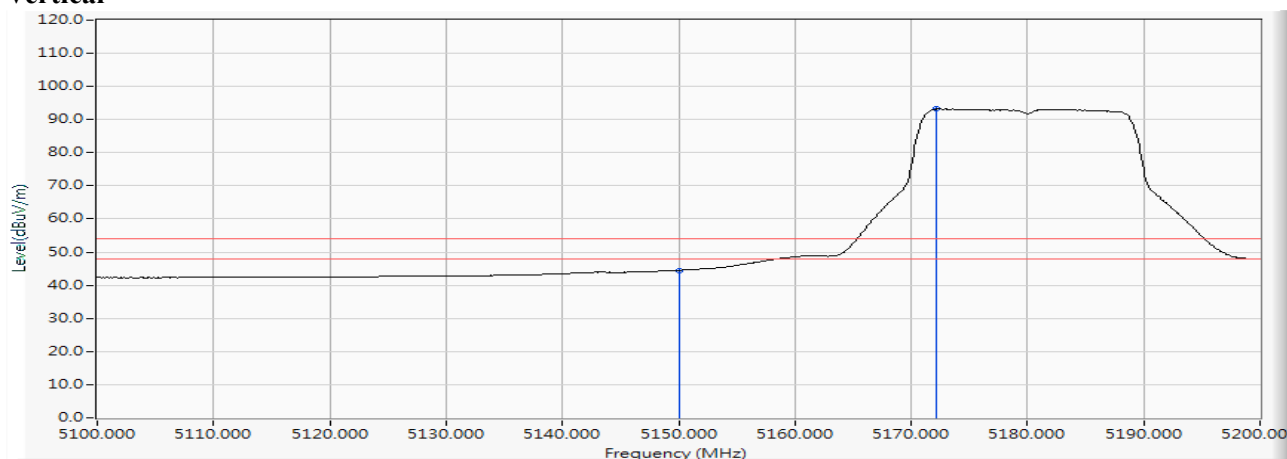


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	29.206	44.513	-9.487	54.000	AVERAGE
2	*	5172.200	15.357	77.828	93.186	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps)-Channel 64 (5320MHz)

Horizontal

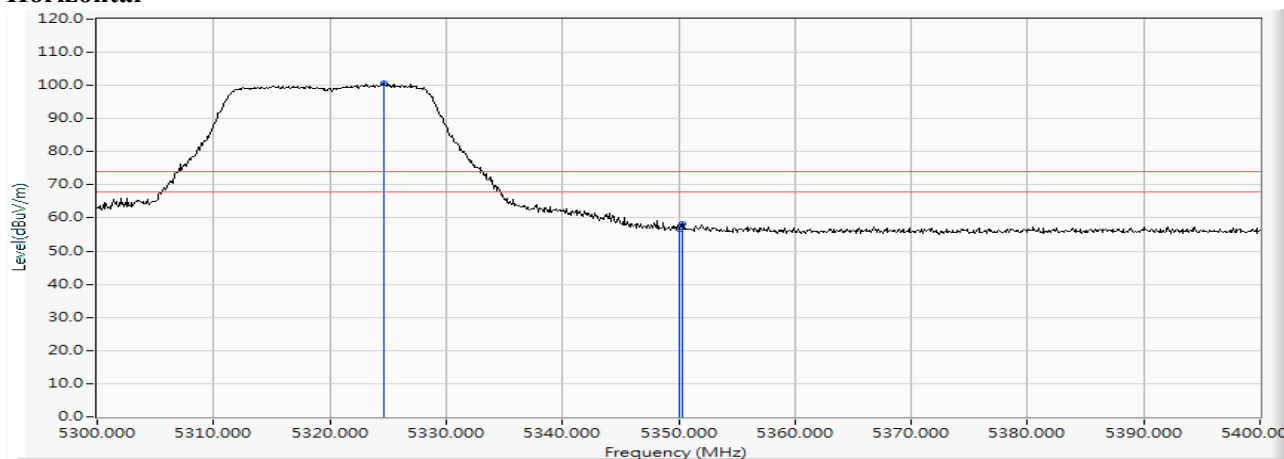


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5324.700	15.865	84.927	100.792	--	--	PEAK
2		5350.000	15.912	40.658	56.570	-17.430	74.000	PEAK
3		5350.300	15.913	42.424	58.337	-15.663	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps)-Channel 64 (5320MHz)

Horizontal

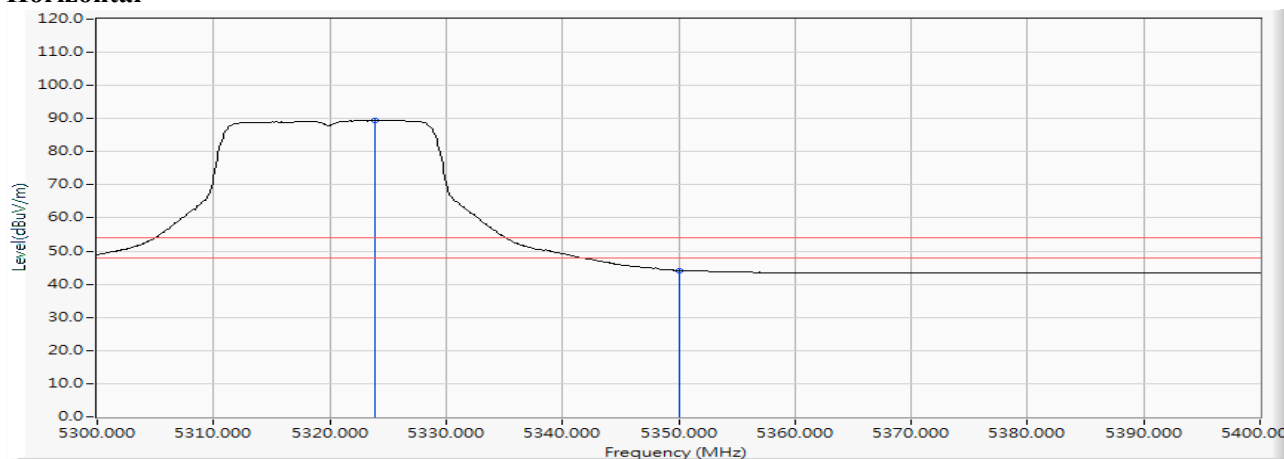


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5323.900	15.863	73.566	89.428	--	--	AVERAGE
2		5350.000	15.912	28.271	44.183	-9.817	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps)-Channel 64 (5320MHz)

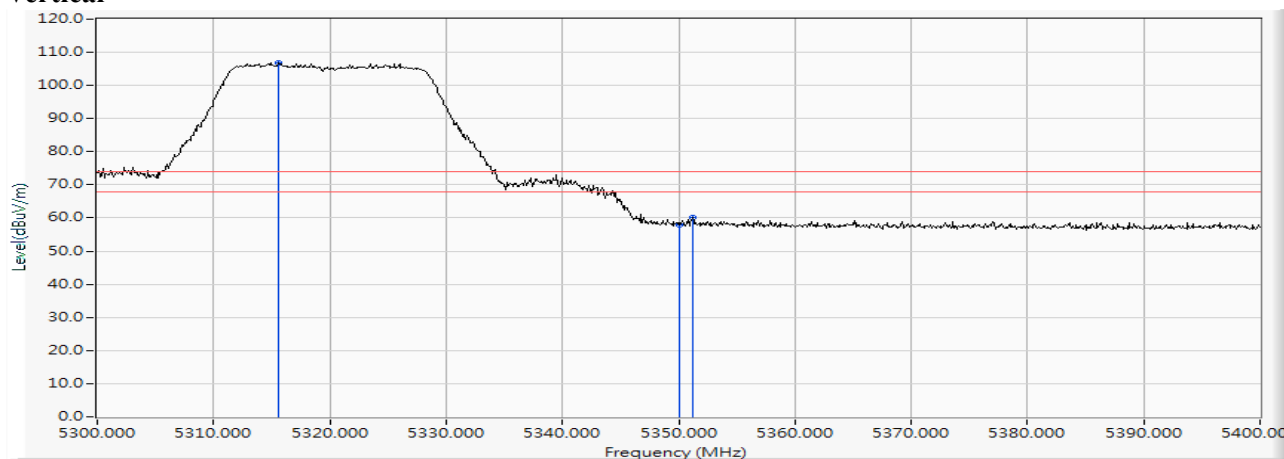
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5315.600	15.835	91.031	106.867	--	--	PEAK
2		5350.000	15.912	41.886	57.798	-16.202	74.000	PEAK
3		5351.200	15.916	44.139	60.055	-13.945	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps)-Channel 64 (5320MHz)

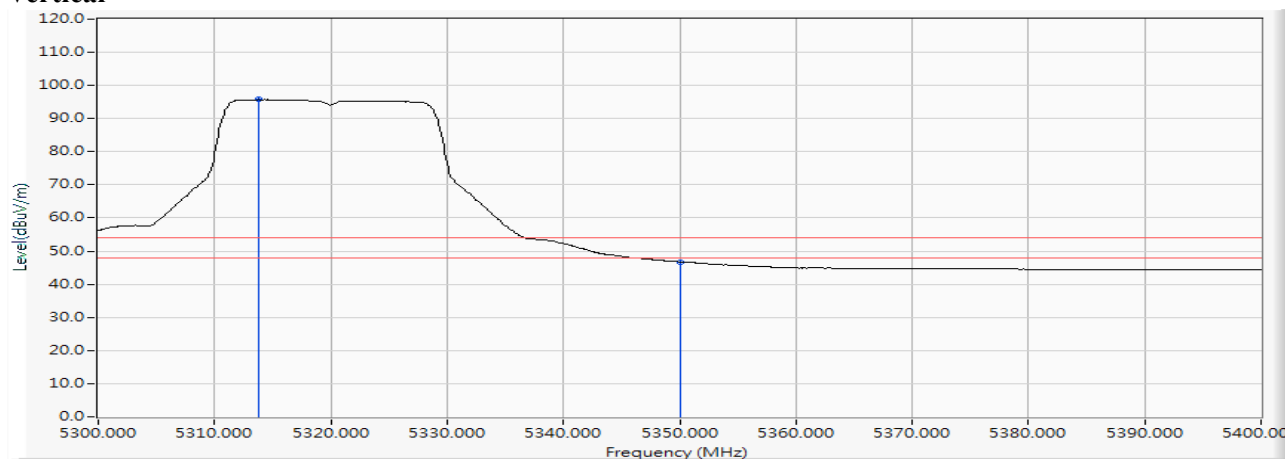Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5313.800	15.830	79.912	95.742	--	--	AVERAGE
2		5350.000	15.912	30.815	46.727	-7.273	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps)-Channel 100 (5500MHz)

Horizontal

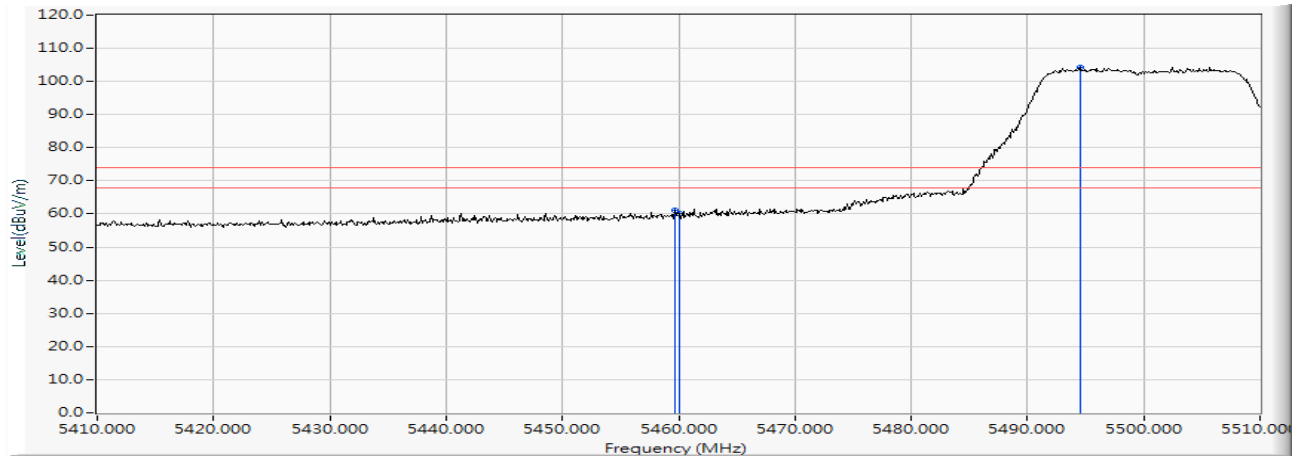


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5459.700	16.184	44.911	61.095	-12.905	74.000	PEAK
2		5460.000	16.185	44.104	60.289	-13.711	74.000	PEAK
3	*	5494.500	16.262	88.056	104.319	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps)-Channel 100 (5500MHz)

Horizontal

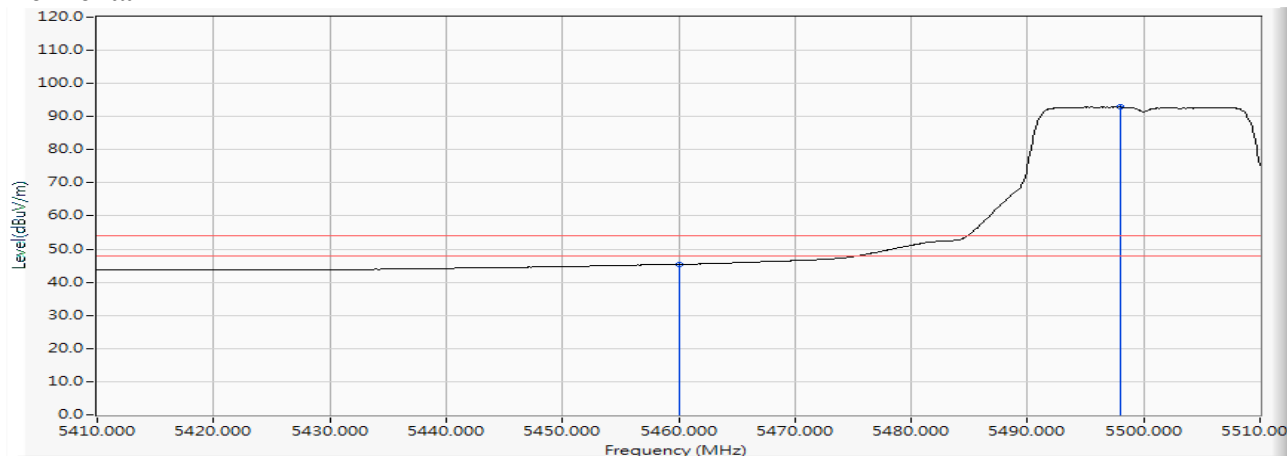


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5460.000	16.185	29.205	45.390	-8.610	54.000	AVERAGE
2	*	5498.000	16.268	76.592	92.860	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps)-Channel 100 (5500MHz)

Vertical

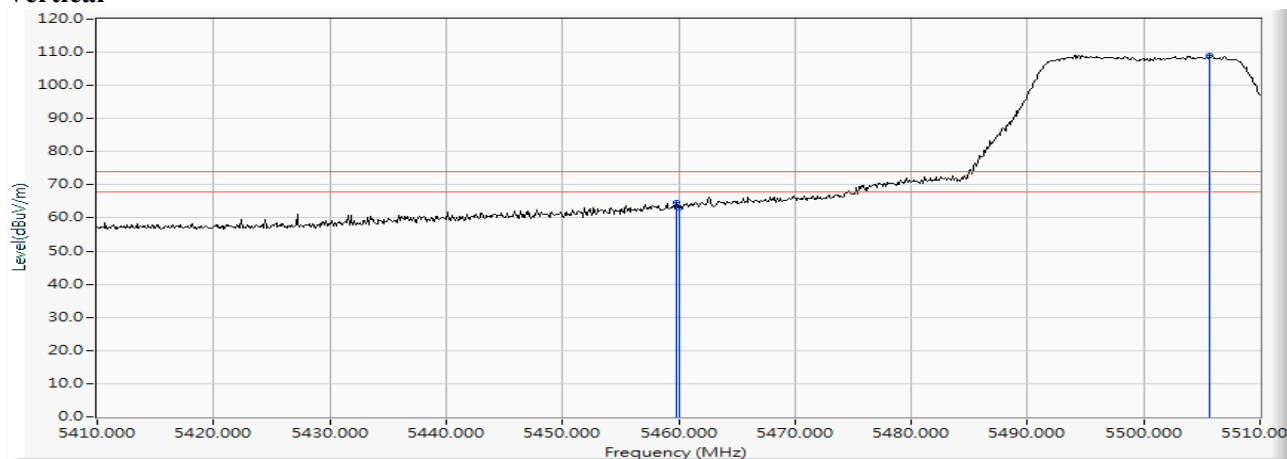


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5459.800	16.184	48.345	64.529	-9.471	74.000	PEAK
2		5460.000	16.185	46.944	63.129	-10.871	74.000	PEAK
3	*	5505.700	16.273	92.884	109.157	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps)-Channel 100 (5500MHz)

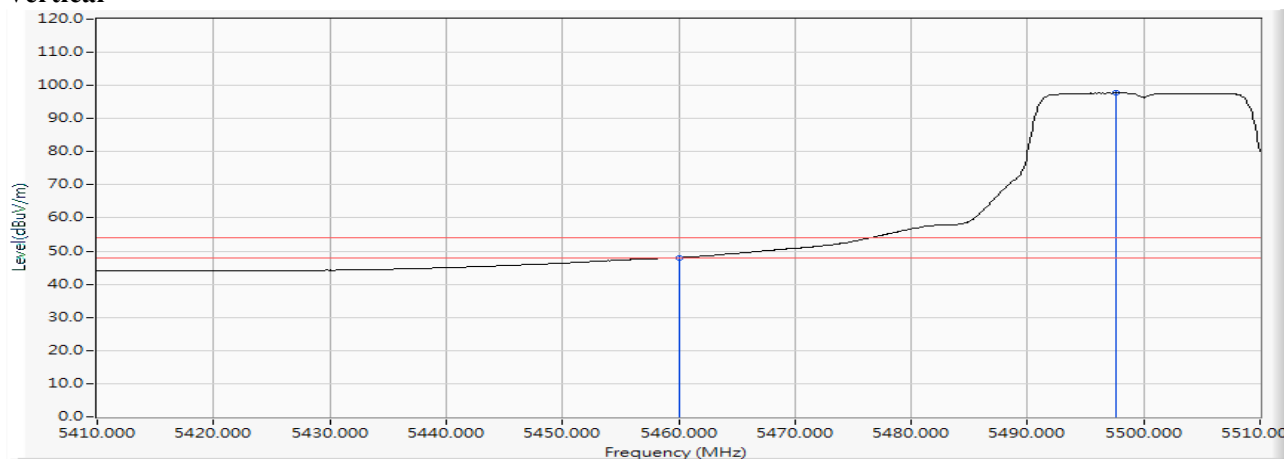Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5460.000	16.185	31.861	48.046	-5.954	54.000	AVERAGE
2	*	5497.600	16.267	81.469	97.736	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps)-Channel 100 (5500MHz)

Horizontal

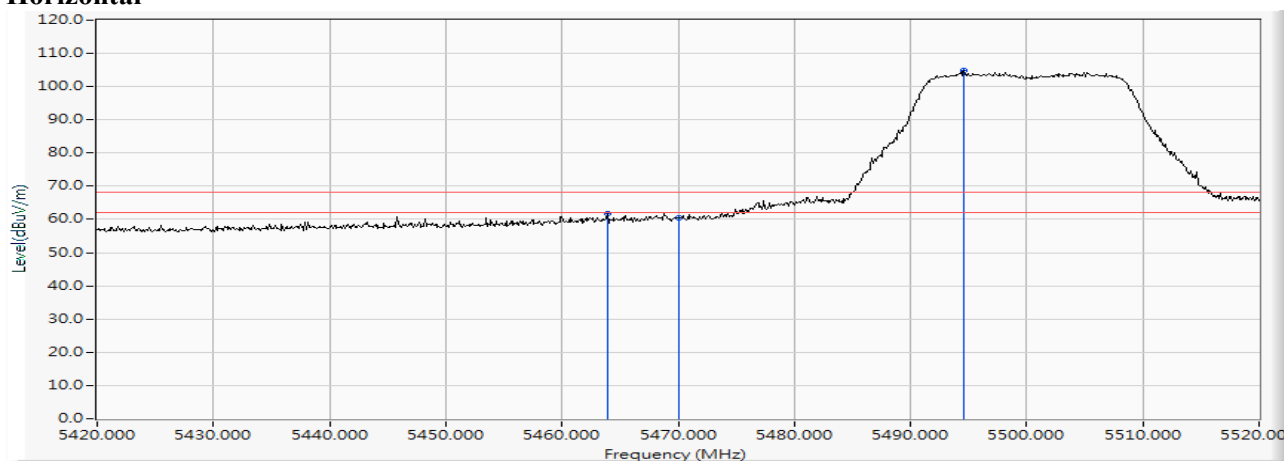

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5463.900	16.190	45.694	61.884	-6.336	68.220	PEAK
2		5470.000	16.200	44.355	60.555	-7.665	68.220	PEAK
3	*	5494.600	16.262	88.638	104.901	--	--	PEAK


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps)-Channel 100 (5500MHz)

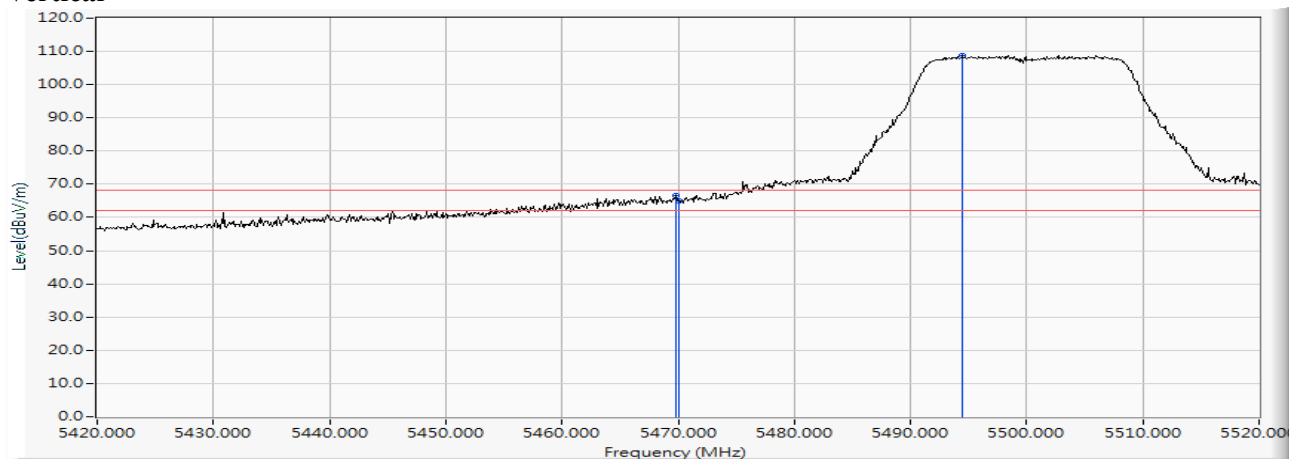Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5469.800	16.200	50.274	66.473	-1.747	68.220	PEAK
2		5470.000	16.200	48.848	65.048	-3.172	68.220	PEAK
3	*	5494.500	16.262	92.568	108.831	--	--	PEAK


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps)-Channel 140 (5700MHz)

Horizontal

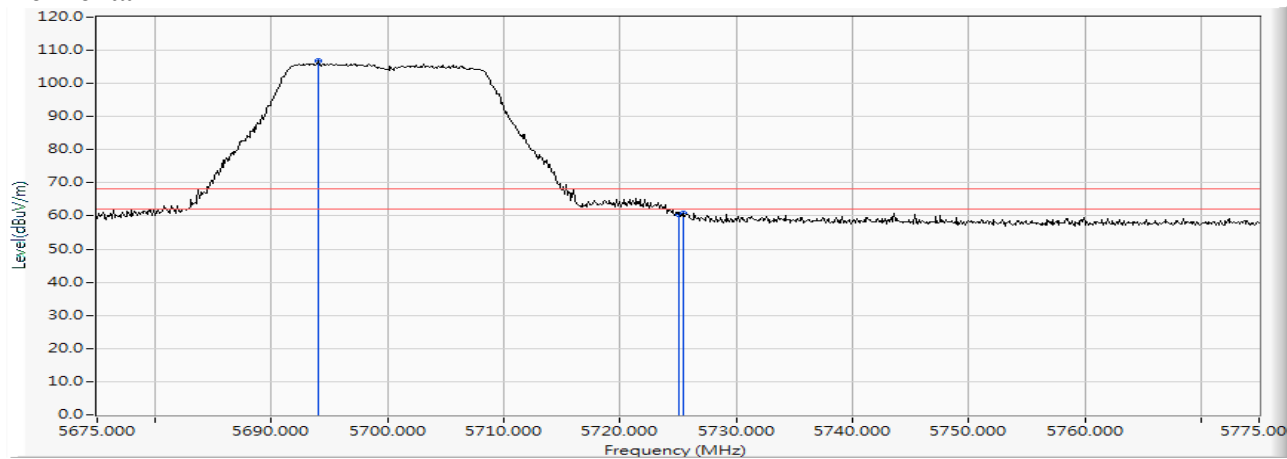

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5694.000	16.493	90.437	106.931	--	--	PEAK
2		5725.000	16.544	43.984	60.528	-7.692	68.220	PEAK
3		5725.500	16.545	44.241	60.786	-7.434	68.220	PEAK


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps)-Channel 140 (5700MHz)

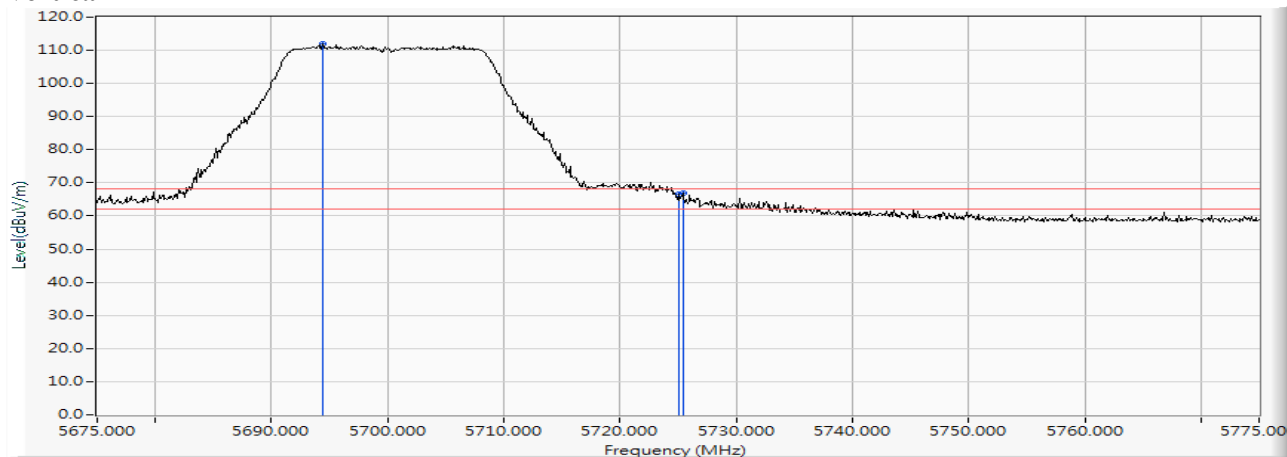Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5694.400	16.494	95.348	111.843	--	--	PEAK
2		5725.000	16.544	50.123	66.667	-1.553	68.220	PEAK
3		5725.400	16.545	50.354	66.899	-1.321	68.220	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps)-Channel 149 (5745MHz)


Horizontal

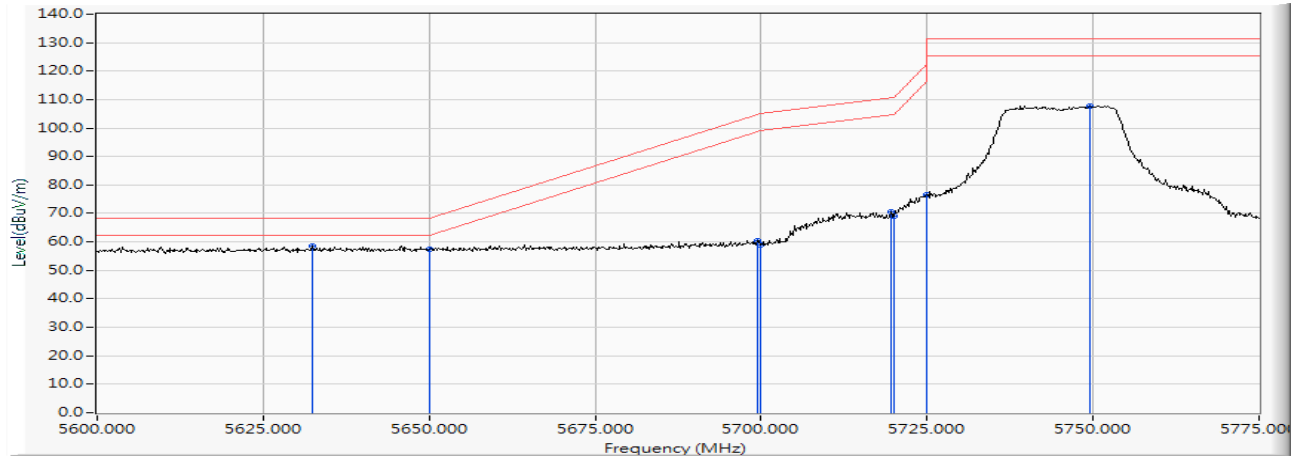

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5632.375	16.409	42.223	58.632	-9.588	68.220	PEAK
2		5650.000	16.447	40.870	57.317	-10.903	68.220	PEAK
3		5699.400	16.501	44.102	60.603	-44.153	104.756	PEAK
4		5700.000	16.502	42.589	59.091	-46.109	105.200	PEAK
5		5719.525	16.534	54.200	70.734	-39.933	110.667	PEAK
6		5720.000	16.535	52.597	69.132	-41.668	110.800	PEAK
7		5725.000	16.544	60.035	76.579	-45.621	122.200	PEAK
8		5749.450	16.567	91.297	107.864	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps)-Channel 149 (5745MHz)


Vertical

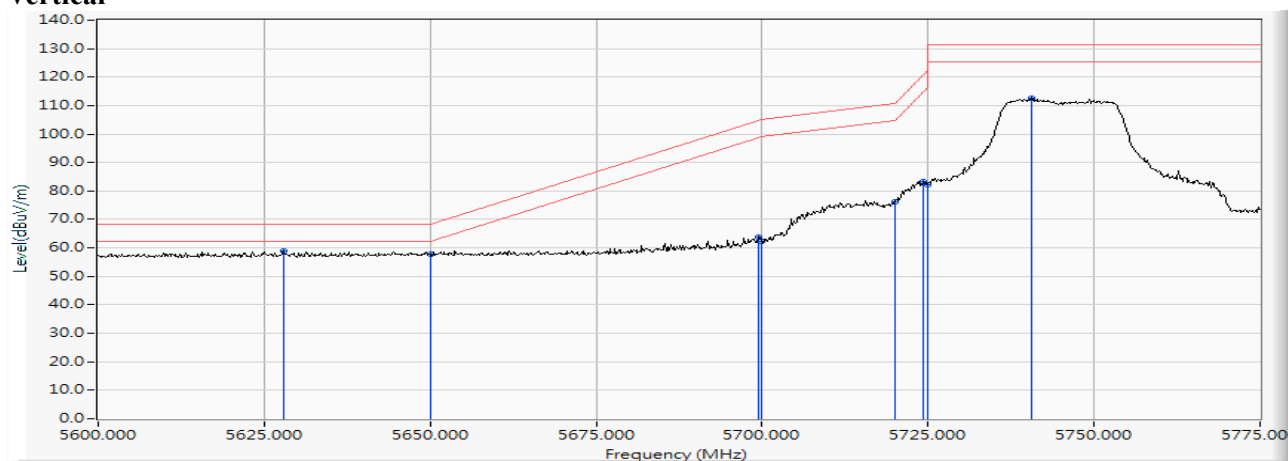

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5628.000	16.408	42.360	58.768	-9.452	68.220	PEAK
2		5650.000	16.447	41.309	57.756	-10.464	68.220	PEAK
3		5699.400	16.501	47.122	63.623	-41.133	104.756	PEAK
4		5700.000	16.502	45.705	62.207	-42.993	105.200	PEAK
5		5720.000	16.535	59.819	76.354	-34.446	110.800	PEAK
6		5724.250	16.543	66.677	83.220	-37.270	120.490	PEAK
7		5725.000	16.544	65.800	82.344	-39.856	122.200	PEAK
8	*	5740.525	16.556	95.981	112.537	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps)-Channel 165 (5825MHz)


Horizontal

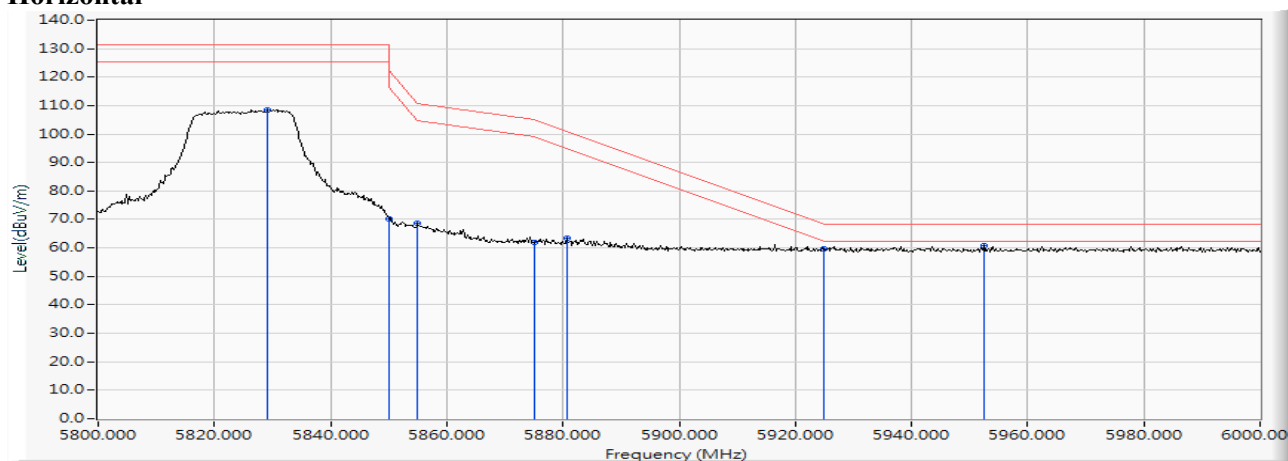

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5829.200	16.717	91.900	108.617	--	--	PEAK
2		5850.000	16.748	53.417	70.165	-52.035	122.200	PEAK
3		5855.000	16.758	51.959	68.717	-42.083	110.800	PEAK
4		5875.000	16.807	44.977	61.785	-43.415	105.200	PEAK
5		5880.600	16.823	46.444	63.267	-37.789	101.056	PEAK
6		5925.000	16.920	42.792	59.712	-8.488	68.200	PEAK
7		5952.600	16.958	43.717	60.676	-7.524	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 11 SISO B: Transmit (802.11n-20BW_7.2Mbps)-Channel 165 (5825MHz)


Vertical

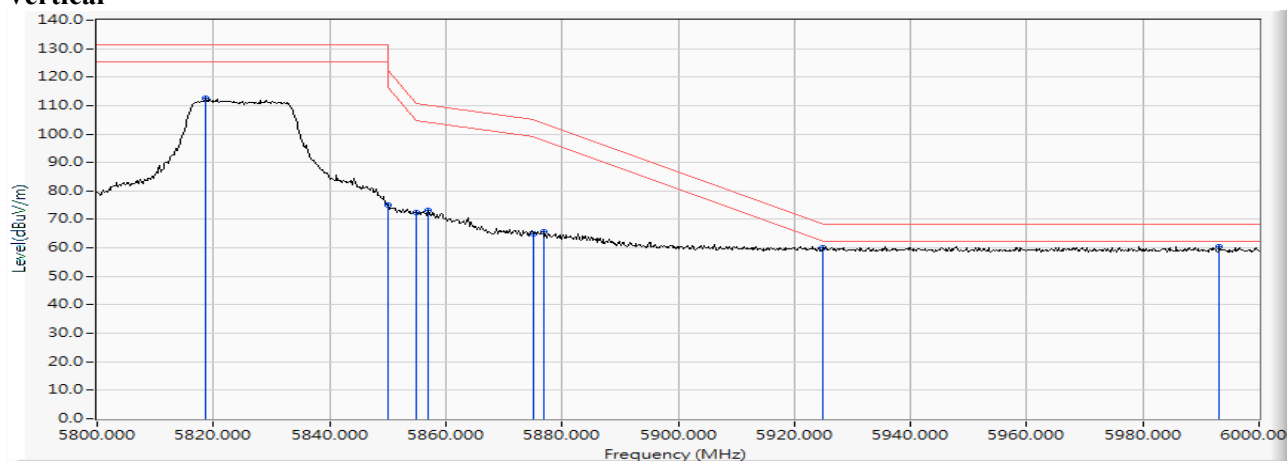

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5818.600	16.702	95.731	112.434	--	--	PEAK
2		5850.000	16.748	58.152	74.900	-47.300	122.200	PEAK
3		5855.000	16.758	55.729	72.487	-38.313	110.800	PEAK
4		5857.000	16.763	56.438	73.201	-37.039	110.240	PEAK
5		5875.000	16.807	48.259	65.067	-40.133	105.200	PEAK
6		5876.800	16.813	49.007	65.820	-38.048	103.868	PEAK
7		5925.000	16.920	43.088	60.008	-8.192	68.200	PEAK
8		5993.200	17.041	43.273	60.314	-7.886	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 38 (5190MHz)

Horizontal

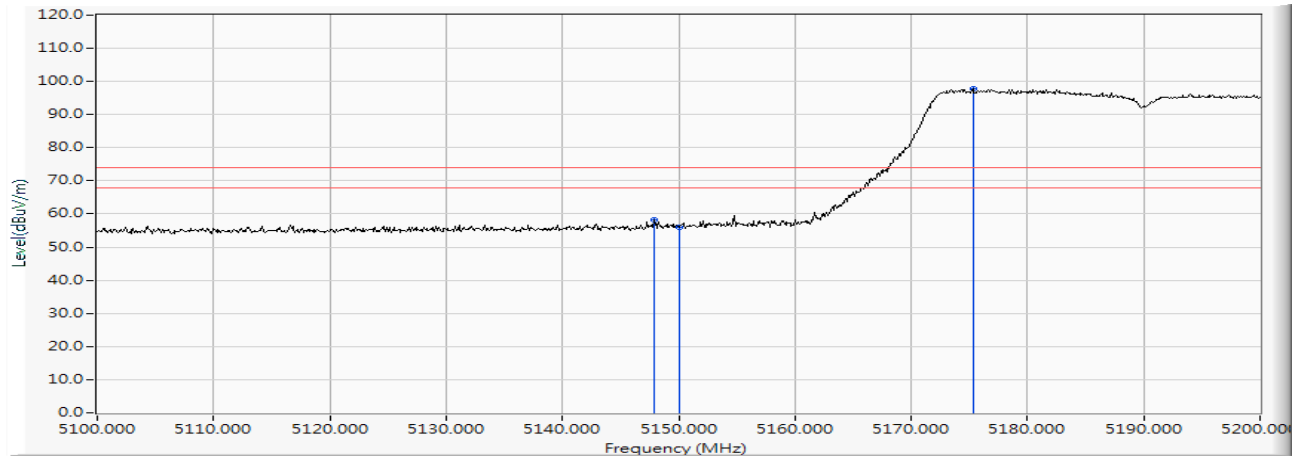


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5147.900	15.295	42.831	58.126	-15.874	74.000	PEAK
2		5150.000	15.307	40.524	55.831	-18.169	74.000	PEAK
3	*	5175.300	15.371	82.445	97.816	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 38 (5190MHz)

Horizontal

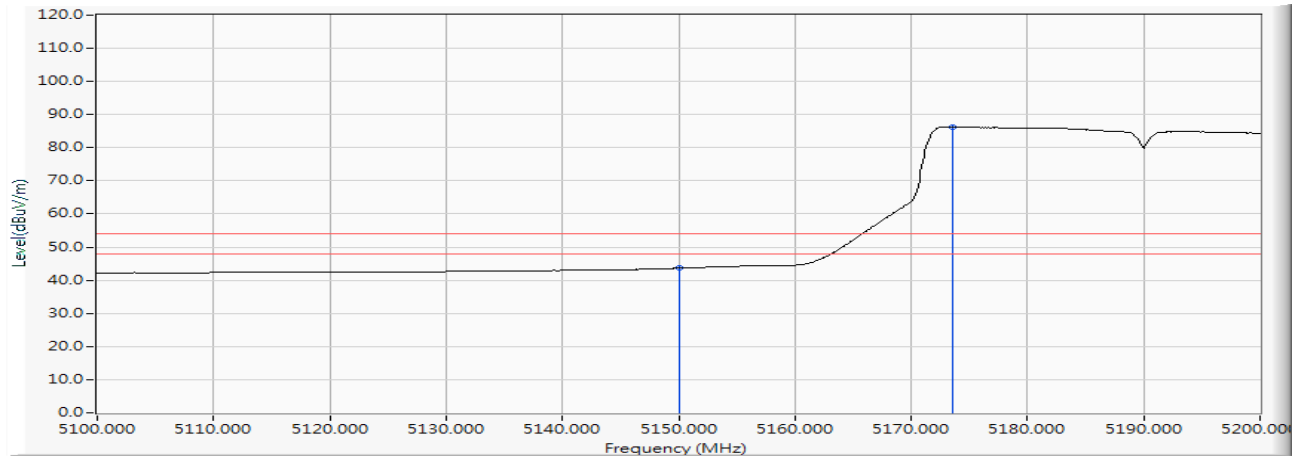


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	28.342	43.649	-10.351	54.000	AVERAGE
2	*	5173.600	15.364	70.984	86.348	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 38 (5190MHz)

Vertical

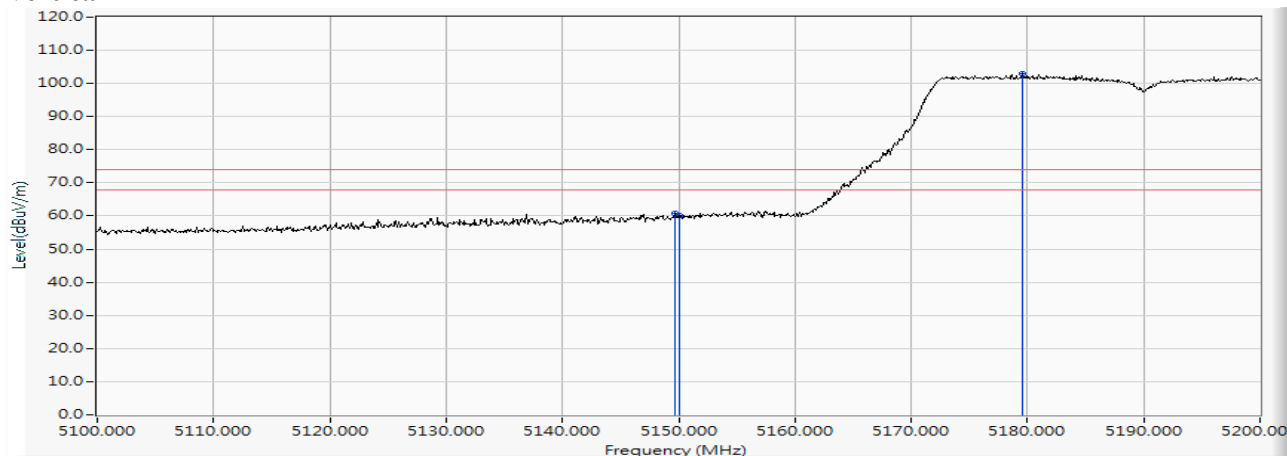


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5149.700	15.305	45.468	60.773	-13.227	74.000	PEAK
2		5150.000	15.307	44.781	60.088	-13.912	74.000	PEAK
3	*	5179.600	15.390	87.489	102.879	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 38 (5190MHz)

Vertical

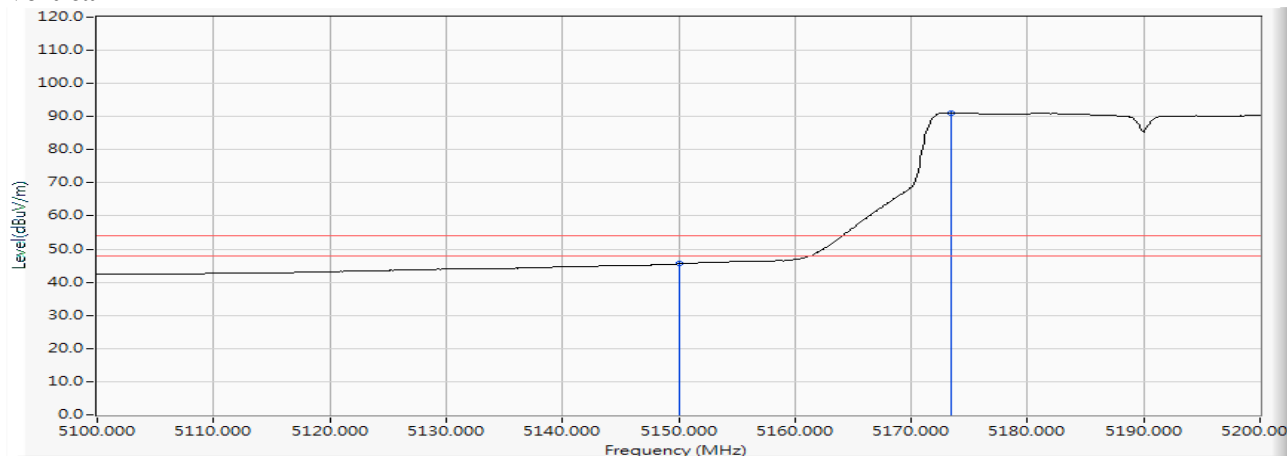


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	30.259	45.566	-8.434	54.000	AVERAGE
2	*	5173.400	15.363	75.784	91.147	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 62 (5310MHz)

Horizontal

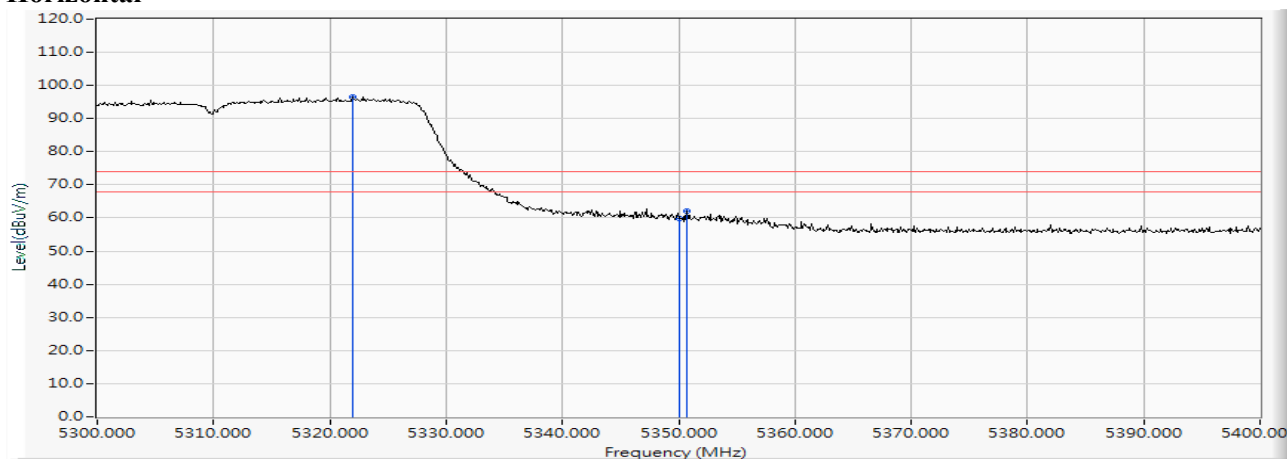


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5322.000	15.856	80.593	96.449	--	--	PEAK
2		5350.000	15.912	44.018	59.930	-14.070	74.000	PEAK
3		5350.700	15.914	46.238	62.152	-11.848	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 62 (5310MHz)

Horizontal

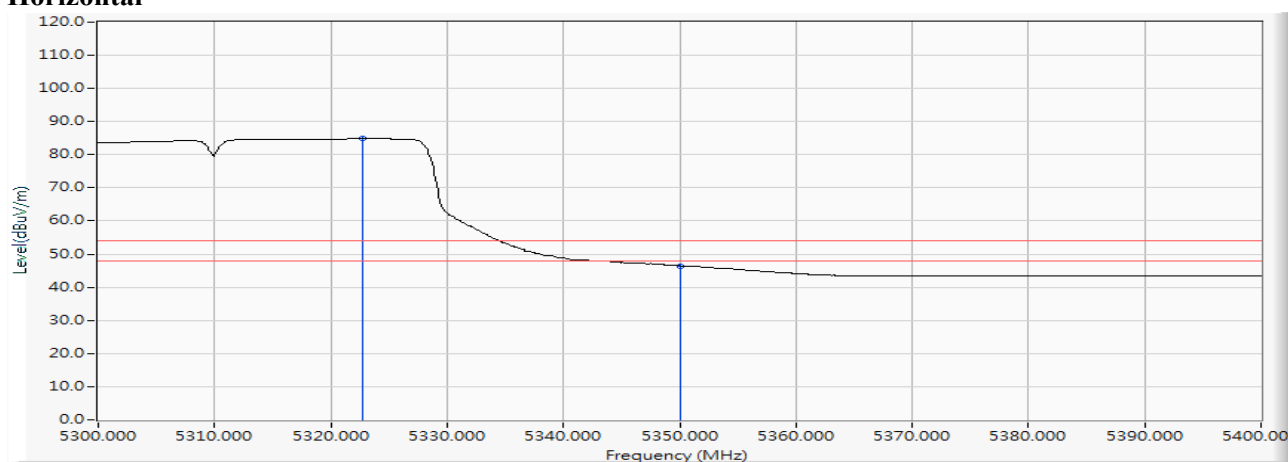


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5322.700	15.858	69.044	84.903	--	--	AVERAGE
2		5350.000	15.912	30.559	46.471	-7.529	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 62 (5310MHz)

Vertical

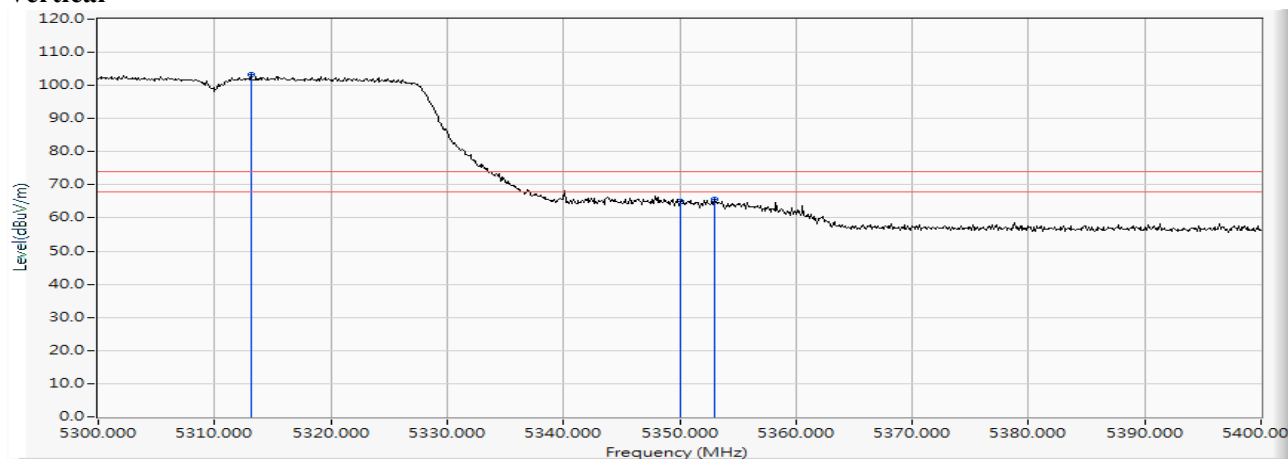


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5313.100	15.827	87.312	103.140	--	--	PEAK
2		5350.000	15.912	49.015	64.927	-9.073	74.000	PEAK
3		5353.000	15.922	49.559	65.481	-8.519	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 62 (5310MHz)

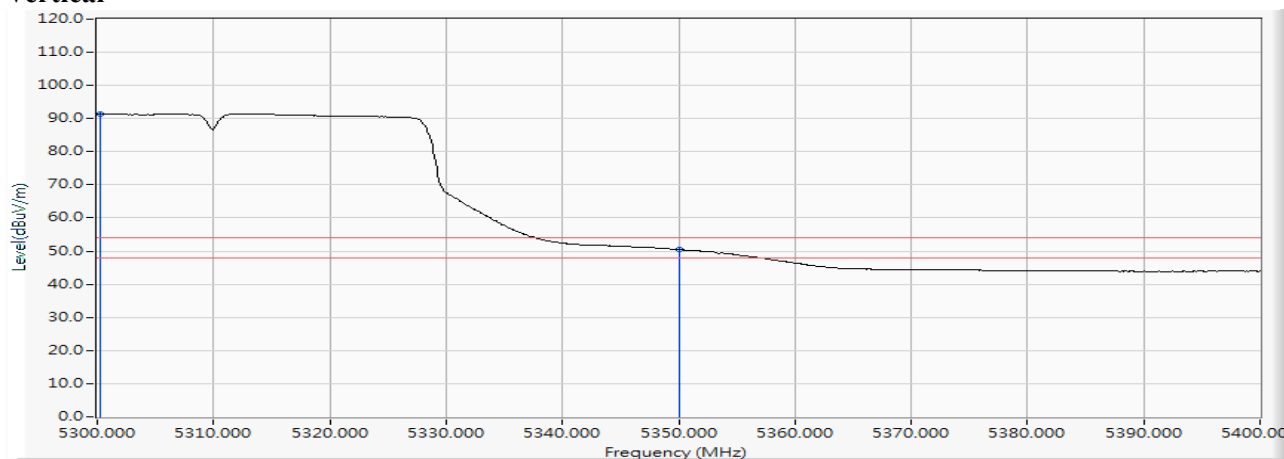Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5300.300	15.797	75.631	91.428	--	--	AVERAGE
2		5350.000	15.912	34.598	50.510	-3.490	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 102 (5510MHz)

Horizontal

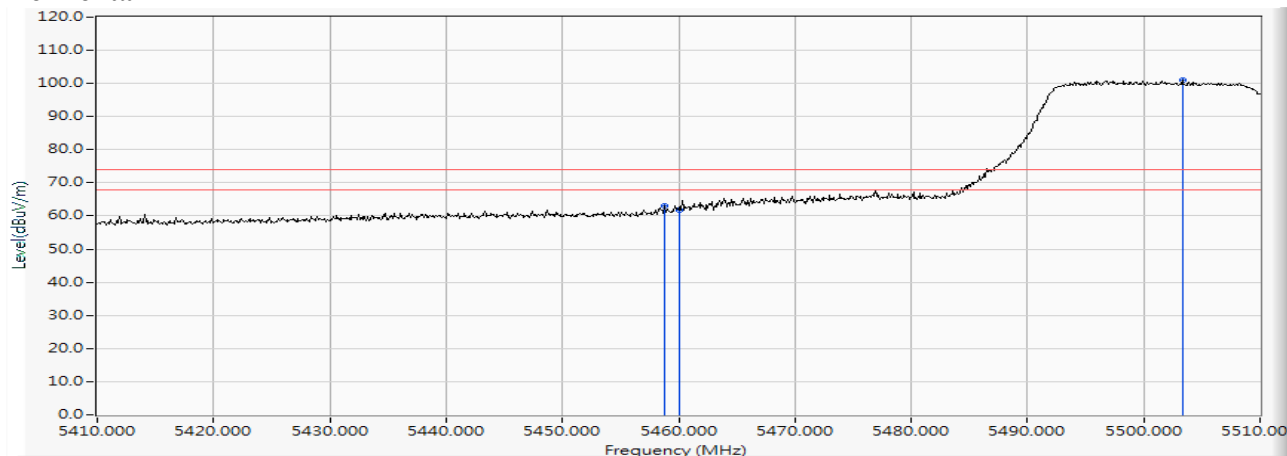


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5458.800	16.182	46.778	62.961	-11.039	74.000	PEAK
2		5460.000	16.185	45.478	61.663	-12.337	74.000	PEAK
3	*	5503.300	16.273	84.822	101.095	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 102 (5510MHz)

Horizontal

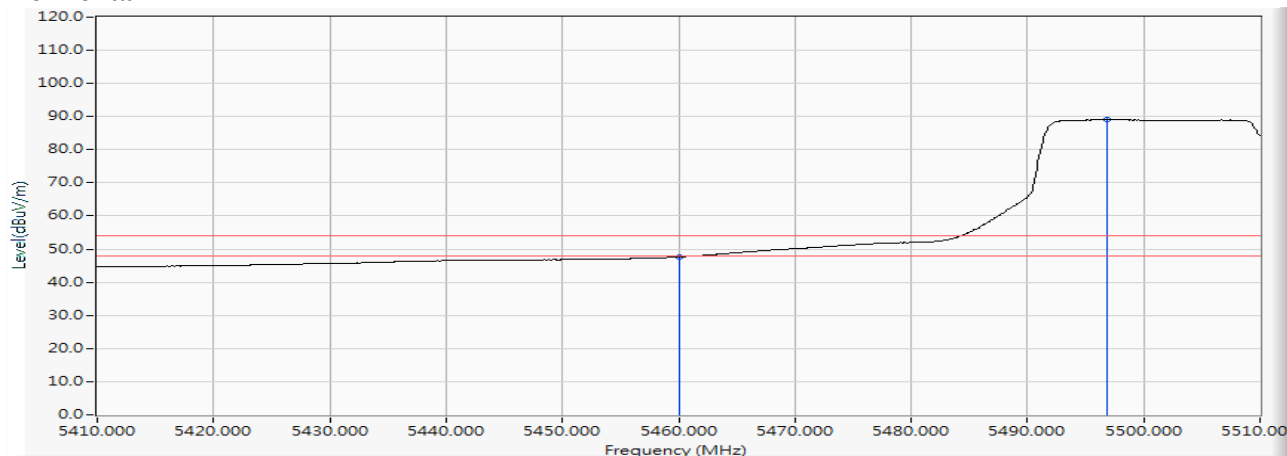


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5460.000	16.185	31.458	47.643	-6.357	54.000	AVERAGE
2	*	5496.800	16.266	72.808	89.074	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 102 (5510MHz)

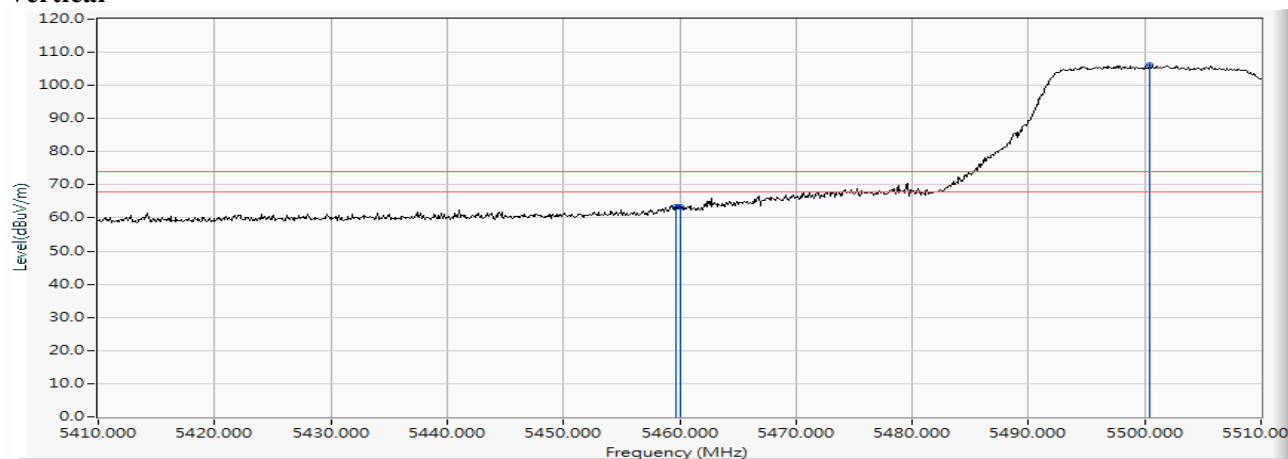
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5459.700	16.184	47.276	63.460	-10.540	74.000	PEAK
2		5460.000	16.185	47.295	63.480	-10.520	74.000	PEAK
3	*	5500.400	16.270	89.765	106.036	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/04
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 102 (5510MHz)

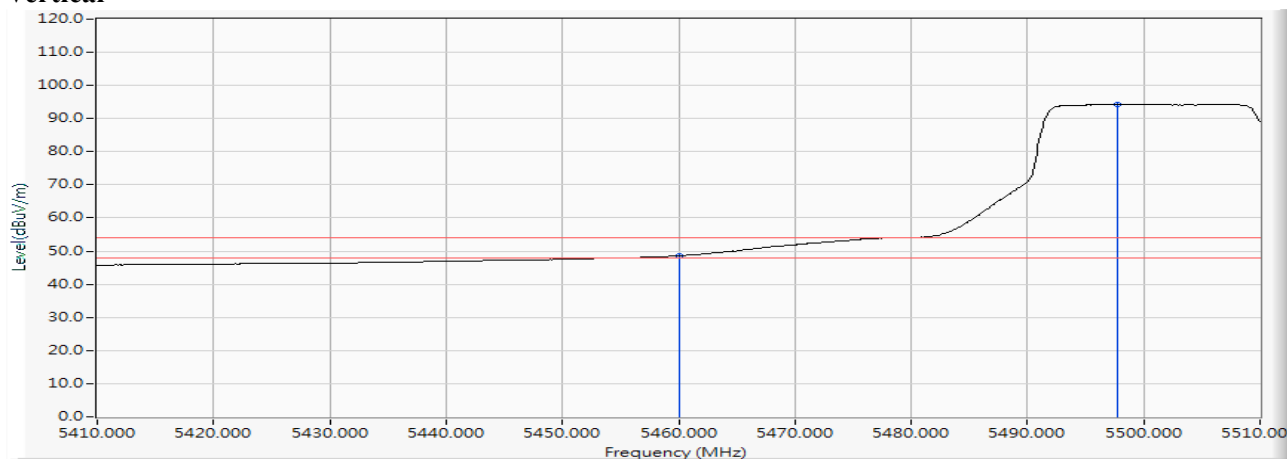Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5460.000	16.185	32.375	48.560	-5.440	54.000	AVERAGE
2	*	5497.800	16.266	78.052	94.319	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 102 (5510MHz)

Horizontal

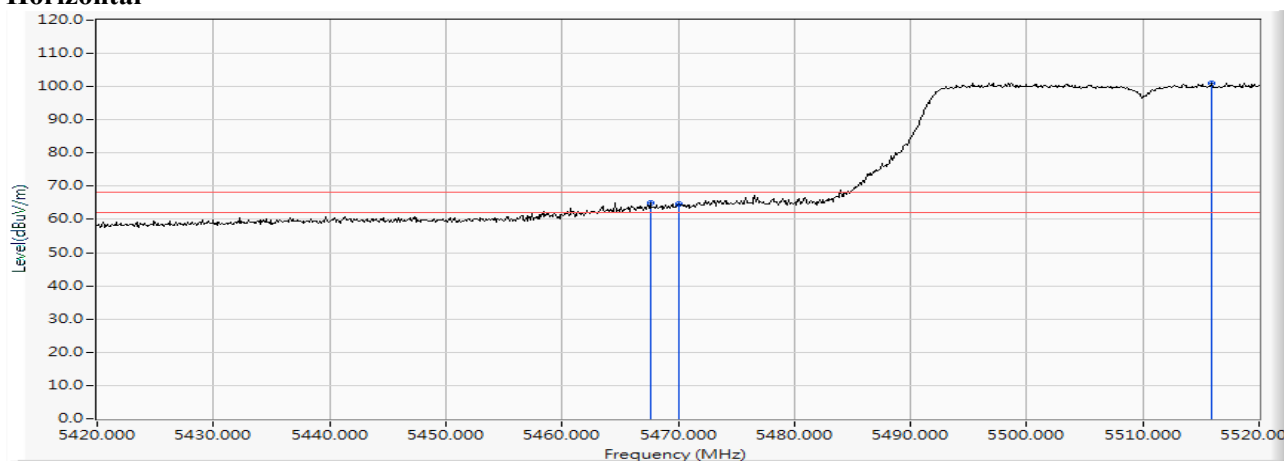

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5467.600	16.196	48.800	64.996	-3.224	68.220	PEAK
2		5470.000	16.200	48.432	64.632	-3.588	68.220	PEAK
3	*	5515.900	16.285	84.883	101.168	--	--	PEAK


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 102 (5510MHz)

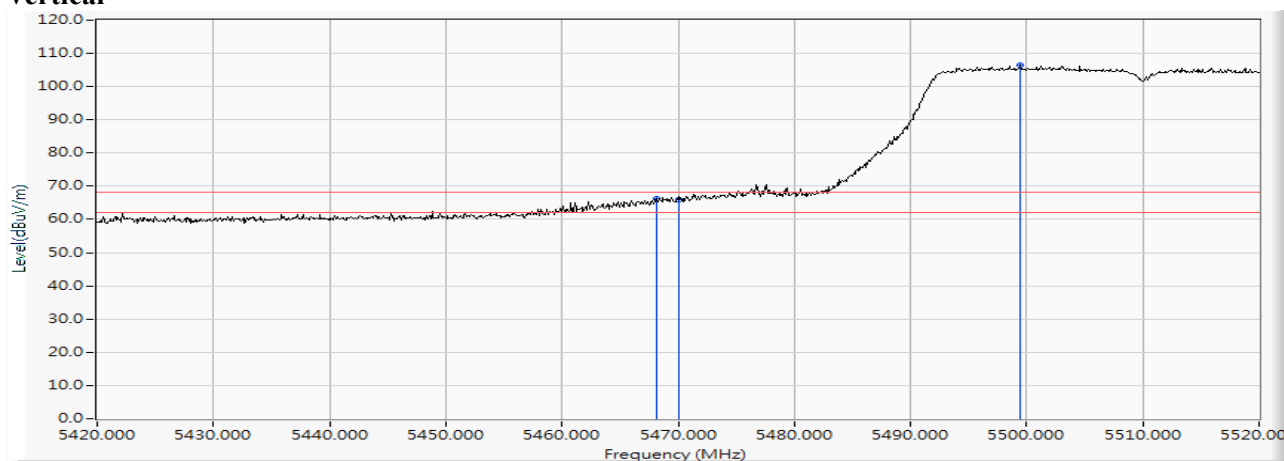Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5468.100	16.196	50.167	66.364	-1.856	68.220	PEAK
2		5470.000	16.200	49.757	65.957	-2.263	68.220	PEAK
3	*	5499.500	16.269	90.261	106.530	--	--	PEAK


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 134 (5670MHz)

Horizontal

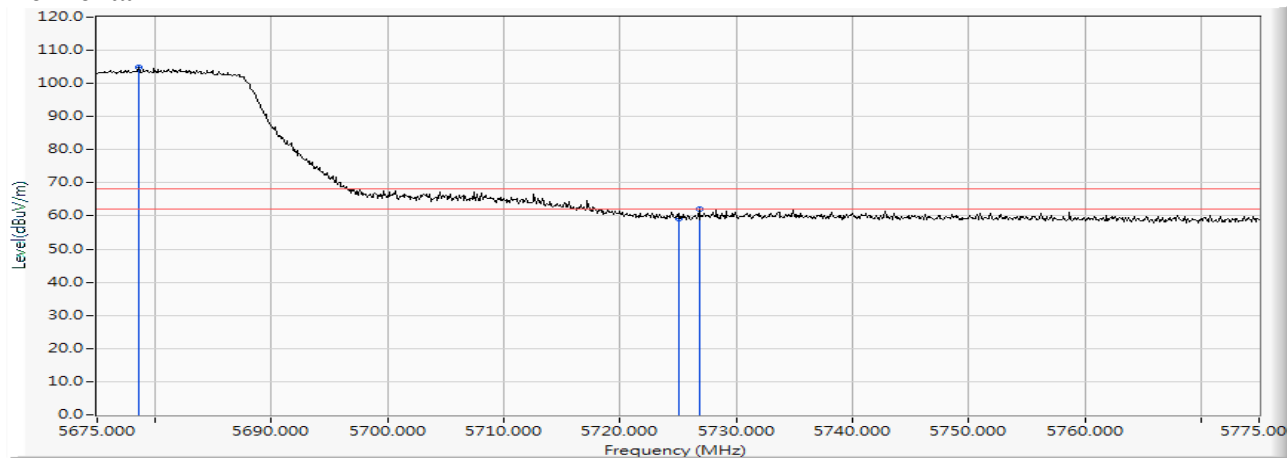

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5678.600	16.476	88.419	104.895	--	--	PEAK
2		5725.000	16.544	42.527	59.071	-9.149	68.220	PEAK
3		5726.800	16.547	45.529	62.076	-6.144	68.220	PEAK


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 134 (5670MHz)

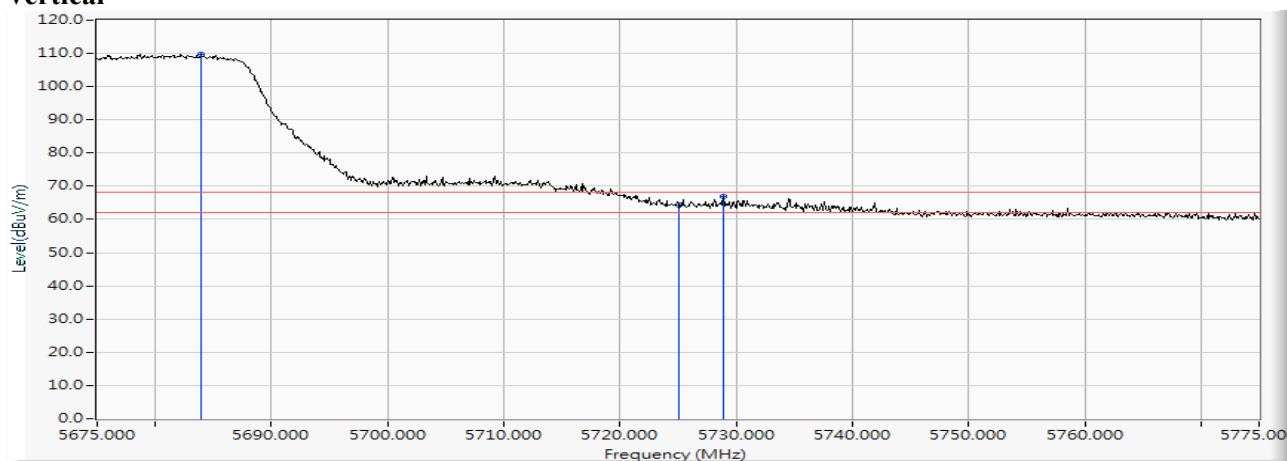Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5683.900	16.481	93.342	109.824	--	--	PEAK
2		5725.000	16.544	47.818	64.362	-3.858	68.220	PEAK
3		5728.900	16.548	50.357	66.905	-1.315	68.220	PEAK


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 151 (5755MHz)

Horizontal

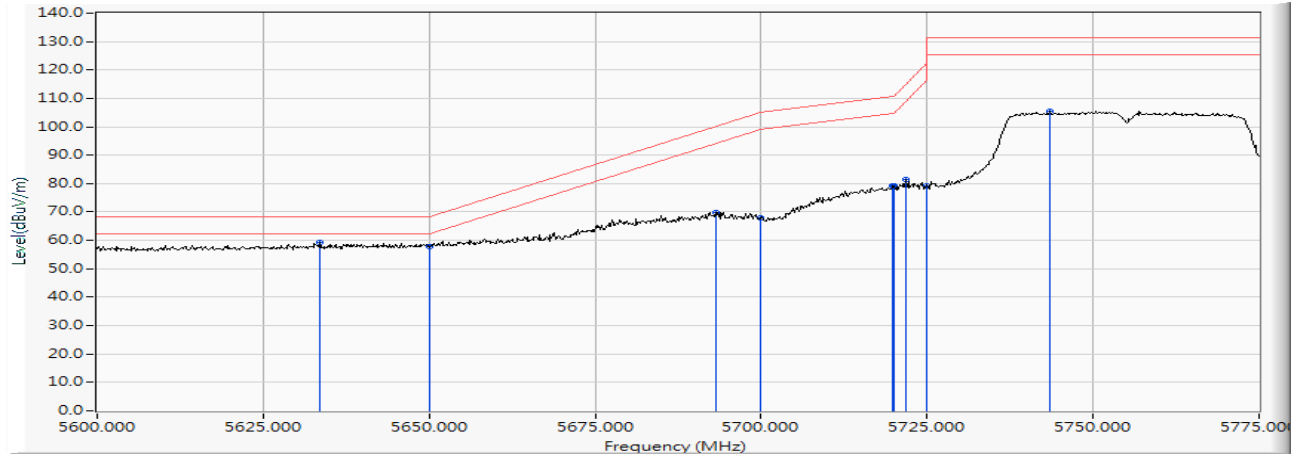

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5633.600	16.410	42.944	59.354	-8.866	68.220	PEAK
2		5650.000	16.447	41.293	57.740	-10.480	68.220	PEAK
3		5693.100	16.493	53.338	69.831	-30.266	100.097	PEAK
4		5700.000	16.502	51.252	67.754	-37.446	105.200	PEAK
5		5719.875	16.535	62.566	79.101	-31.664	110.765	PEAK
6		5720.000	16.535	62.626	79.161	-31.639	110.800	PEAK
7		5721.800	16.538	65.061	81.599	-33.305	114.904	PEAK
8		5725.000	16.544	62.801	79.345	-42.855	122.200	PEAK
9	*	5743.500	16.559	88.947	105.505	--	--	PEAK


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 151 (5755MHz)

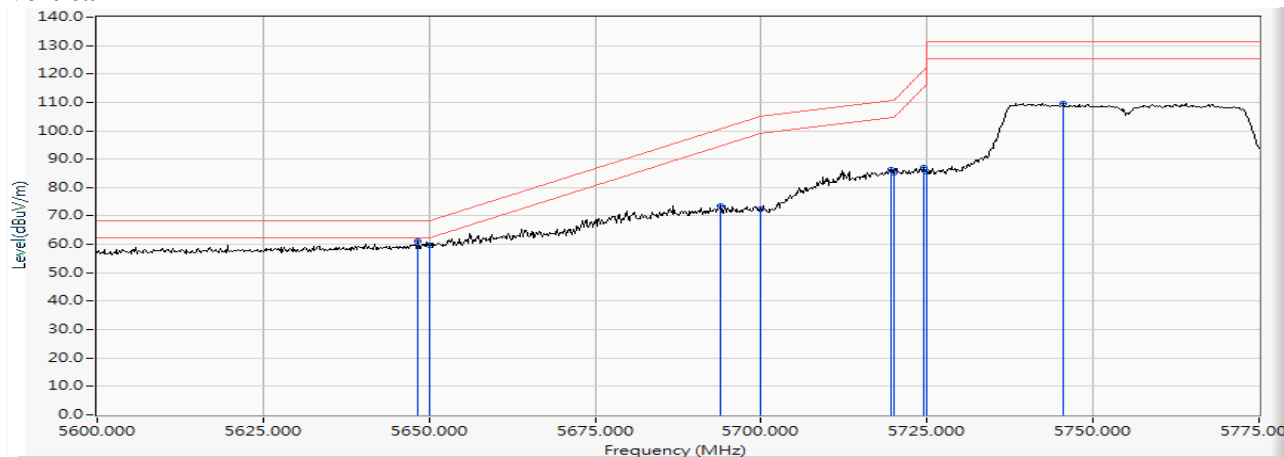Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5648.300	16.442	44.716	61.158	-7.062	68.220	PEAK
2		5650.000	16.447	43.182	59.629	-8.591	68.220	PEAK
3		5693.975	16.493	57.160	73.654	-27.090	100.744	PEAK
4		5700.000	16.502	55.902	72.404	-32.796	105.200	PEAK
5		5719.525	16.534	69.725	86.259	-24.408	110.667	PEAK
6		5720.000	16.535	68.714	85.249	-25.551	110.800	PEAK
7		5724.425	16.543	70.551	87.094	-33.795	120.889	PEAK
8		5725.000	16.544	69.025	85.569	-36.631	122.200	PEAK
9	*	5745.600	16.561	93.080	109.641	--	--	PEAK


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 159 (5795MHz)

Horizontal

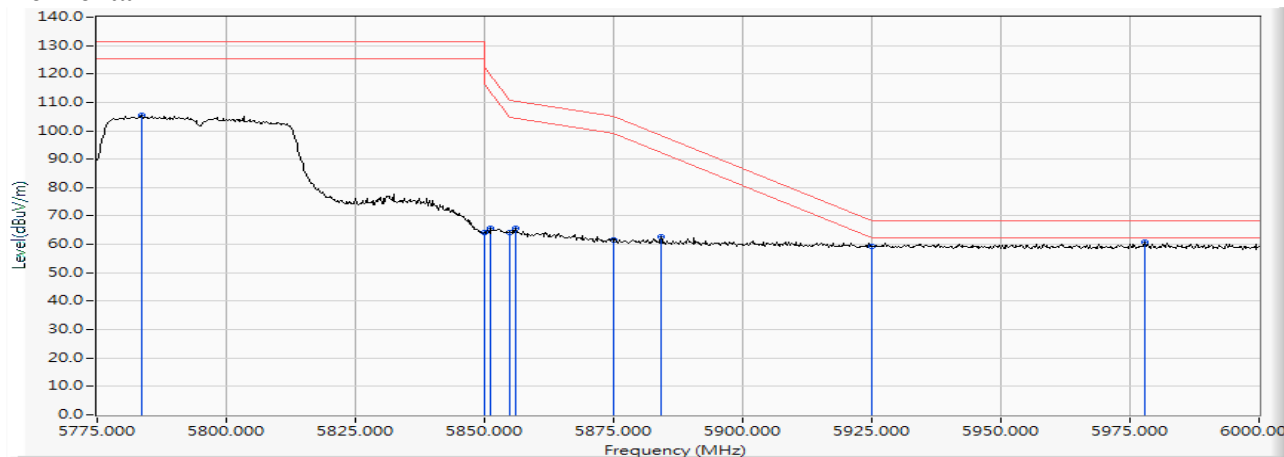

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5783.550	16.616	88.717	105.333	--	--	PEAK
2		5850.000	16.748	47.289	64.037	-58.163	122.200	PEAK
3		5851.275	16.750	48.916	65.666	-53.627	119.293	PEAK
4		5855.000	16.758	47.578	64.336	-46.464	110.800	PEAK
5		5856.000	16.761	48.905	65.666	-44.854	110.520	PEAK
6		5875.000	16.807	44.701	61.509	-43.691	105.200	PEAK
7		5884.125	16.833	46.003	62.836	-35.612	98.448	PEAK
8		5925.000	16.920	42.448	59.368	-8.832	68.200	PEAK
9		5977.950	17.017	43.836	60.853	-7.347	68.200	PEAK


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 12 SISO B: Transmit (802.11n-40BW_15Mbps)-Channel 159 (5795MHz)

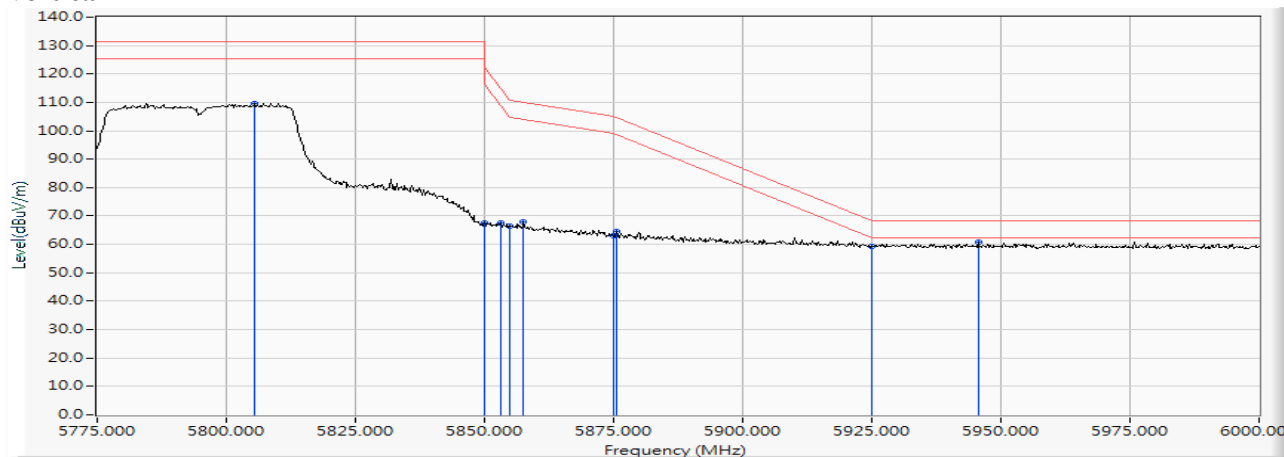Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5805.600	16.673	92.876	109.549	--	--	PEAK
2		5850.000	16.748	50.717	67.465	-54.735	122.200	PEAK
3		5853.075	16.754	50.928	67.682	-47.507	115.189	PEAK
4		5855.000	16.758	49.753	66.511	-44.289	110.800	PEAK
5		5857.575	16.764	51.151	67.915	-42.164	110.079	PEAK
6		5875.000	16.807	46.087	62.895	-42.305	105.200	PEAK
7		5875.575	16.809	47.850	64.659	-40.116	104.775	PEAK
8		5925.000	16.920	42.457	59.377	-8.823	68.200	PEAK
9		5945.550	16.945	43.902	60.847	-7.353	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 13 SISO B: Transmit (802.11ac-80BW_32.5Mbps)-Channel 42 (5210MHz)

Horizontal

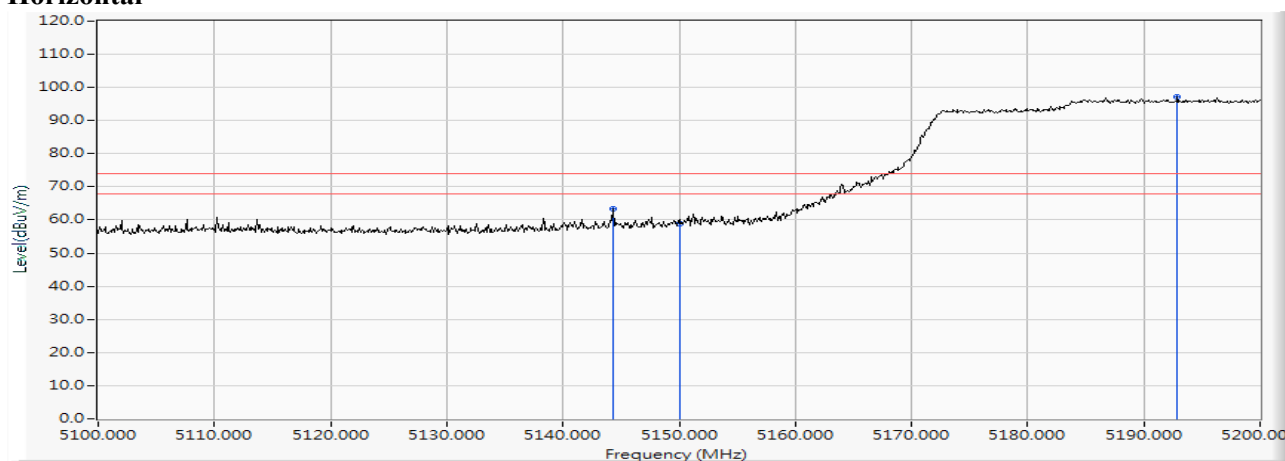


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5144.300	15.275	48.153	63.427	-10.573	74.000	PEAK
2		5150.000	15.307	43.474	58.781	-15.219	74.000	PEAK
3	*	5192.900	15.445	81.625	97.071	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 13 SISO B: Transmit (802.11ac-80BW_32.5Mbps)-Channel 42 (5210MHz)

Horizontal

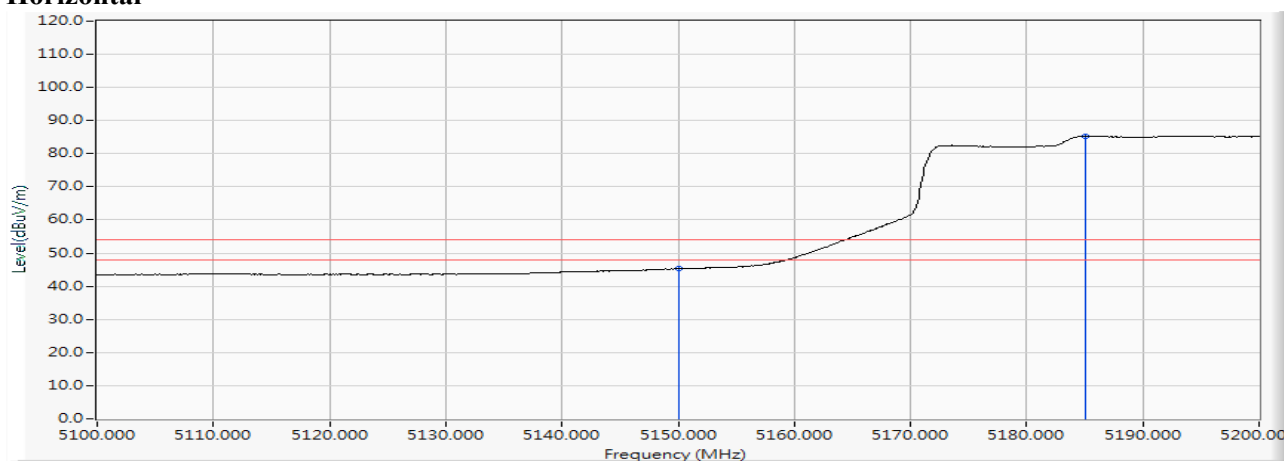


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	30.051	45.358	-8.642	54.000	AVERAGE
2	*	5185.100	15.415	69.941	85.356	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 13 SISO B: Transmit (802.11ac-80BW_32.5Mbps)-Channel 42 (5210MHz)

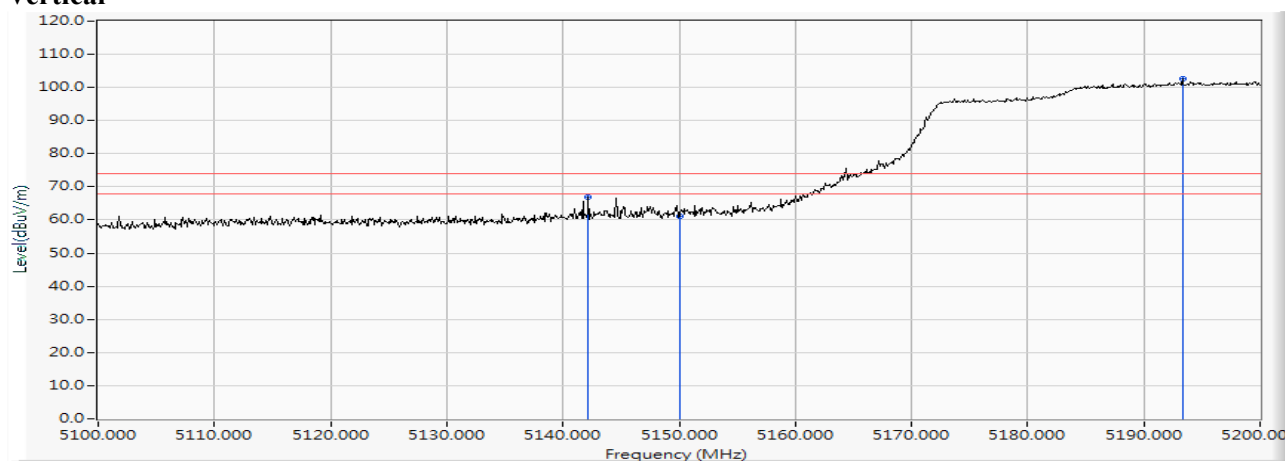
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5142.200	15.262	51.673	66.936	-7.064	74.000	PEAK
2		5150.000	15.307	45.862	61.169	-12.831	74.000	PEAK
3	*	5193.300	15.447	87.315	102.762	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 13 SISO B: Transmit (802.11ac-80BW_32.5Mbps)-Channel 42 (5210MHz)

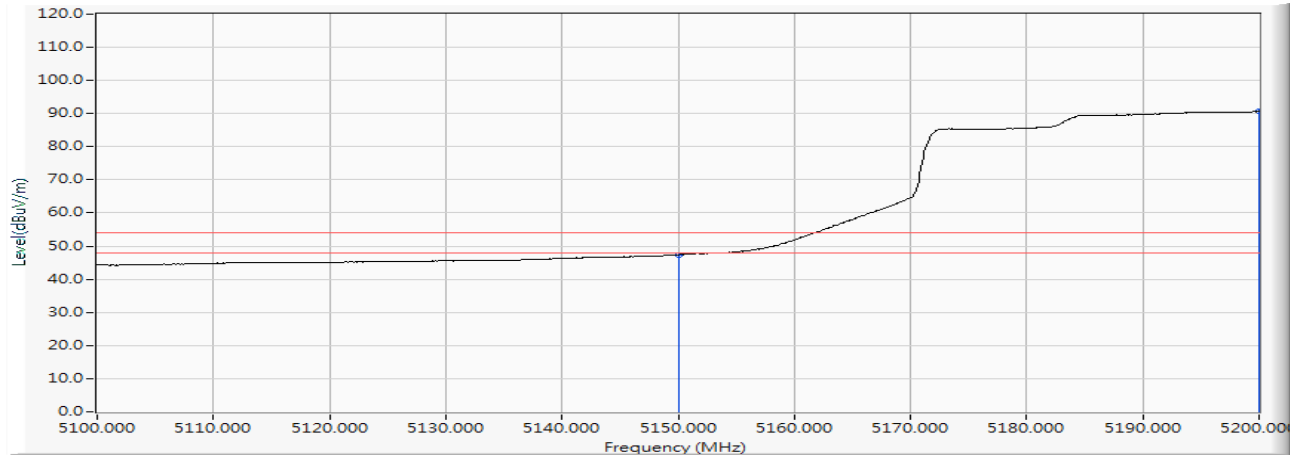Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	32.103	47.410	-6.590	54.000	AVERAGE
2	*	5200.000	15.473	75.206	90.679	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 13 SISO B: Transmit (802.11ac-80BW_32.5Mbps)-Channel 58 (5290MHz)

Horizontal

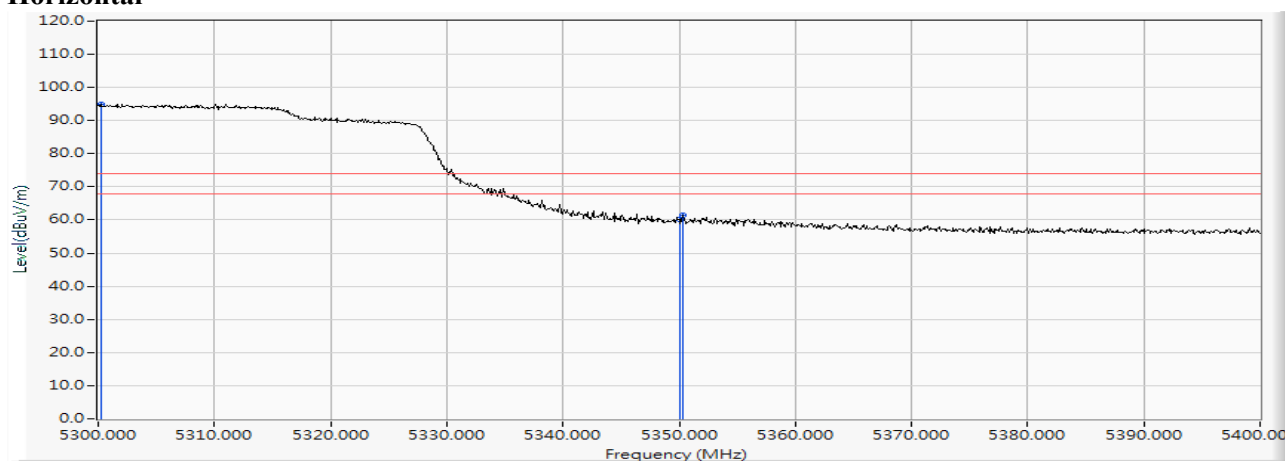


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5300.200	15.796	79.124	94.921	--	--	PEAK
2		5350.000	15.912	44.382	60.294	-13.706	74.000	PEAK
3		5350.300	15.913	45.479	61.392	-12.608	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 13 SISO B: Transmit (802.11ac-80BW_32.5Mbps)-Channel 58 (5290MHz)

Horizontal

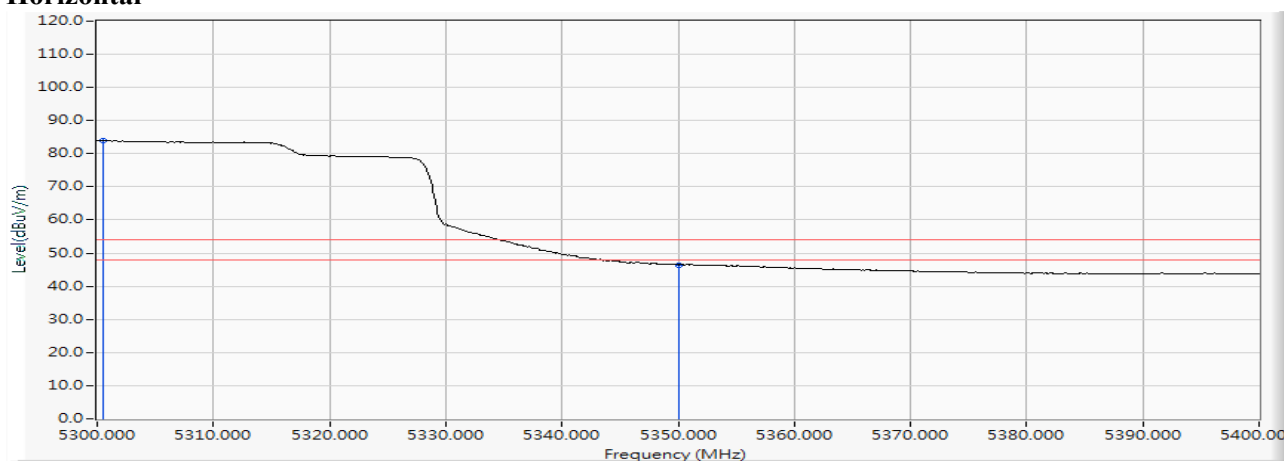


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5300.500	15.797	68.276	84.073	--	--	AVERAGE
2		5350.000	15.912	30.514	46.426	-7.574	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 13 SISO B: Transmit (802.11ac-80BW_32.5Mbps)-Channel 58 (5290MHz)

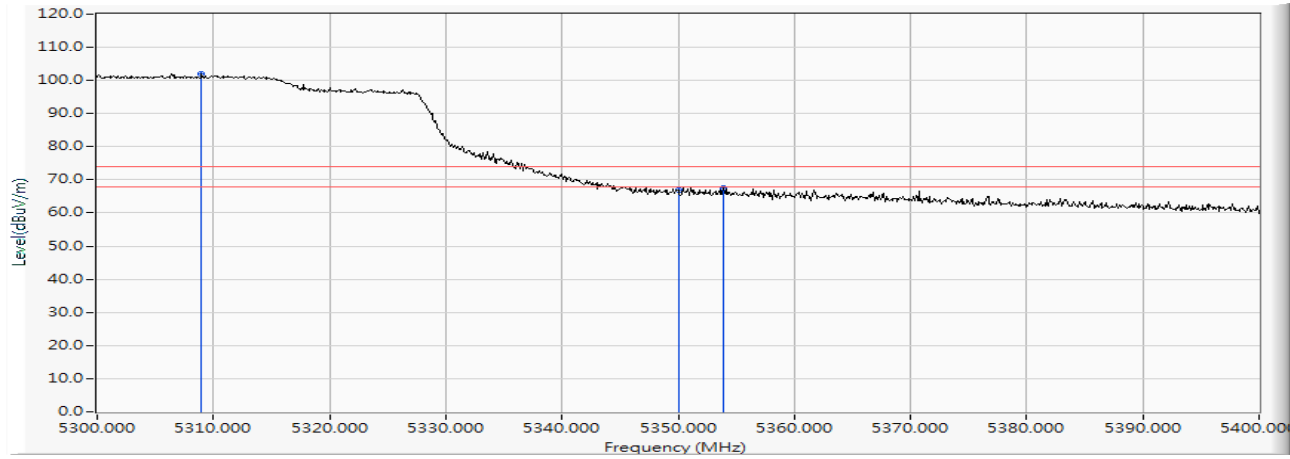
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5309.000	15.818	86.155	101.973	--	--	PEAK
2		5350.000	15.912	51.049	66.961	-7.039	74.000	PEAK
3		5353.900	15.925	51.589	67.513	-6.487	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 13 SISO B: Transmit (802.11ac-80BW_32.5Mbps)-Channel 58 (5290MHz)

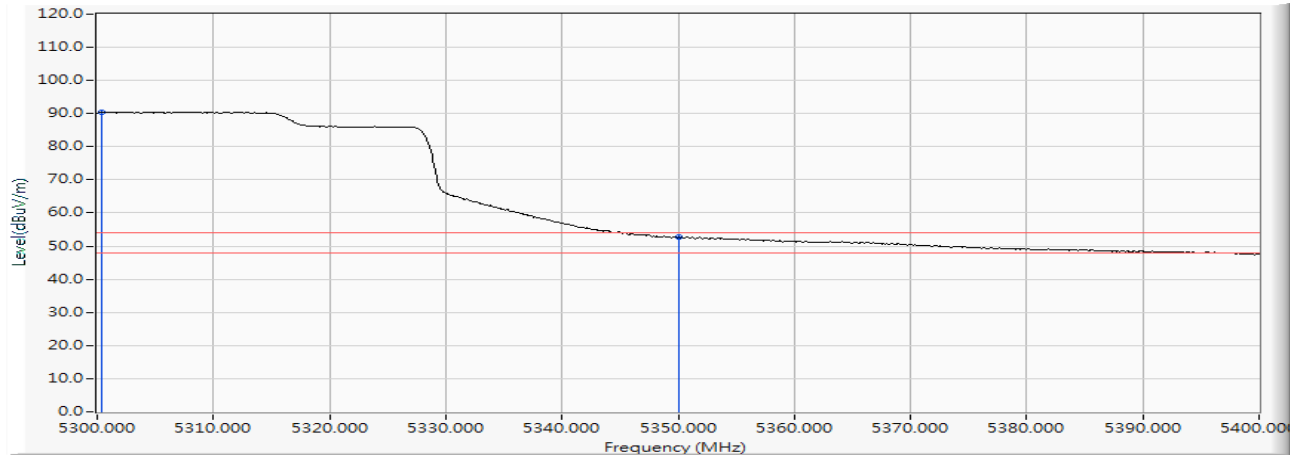Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5300.400	15.797	74.649	90.446	--	--	AVERAGE
2		5350.000	15.912	36.772	52.684	-1.316	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 13 SISO B: Transmit (802.11ac-80BW_32.5Mbps)-Channel 106 (5530MHz)

Horizontal

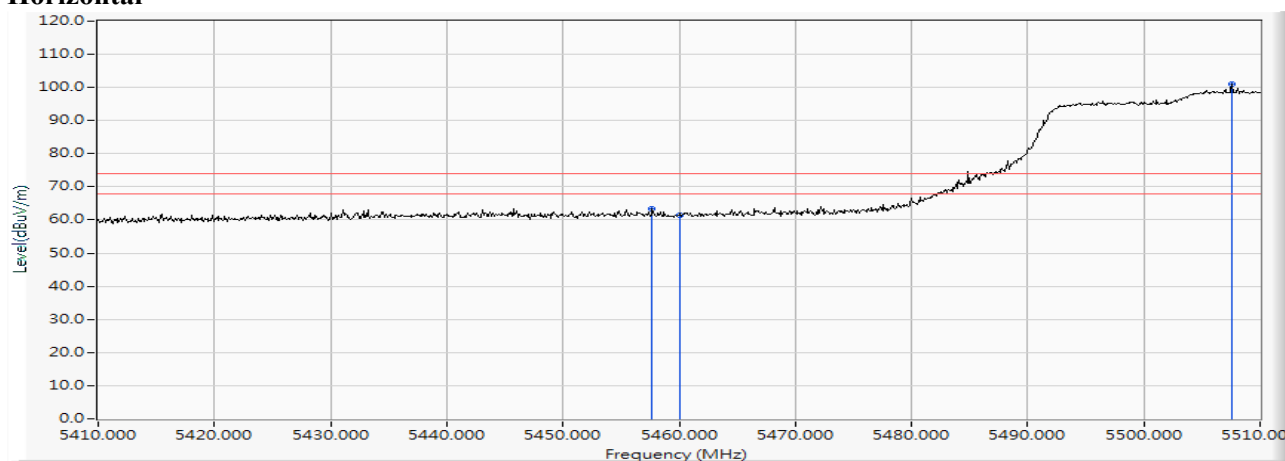


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5457.700	16.181	47.230	63.411	-10.589	74.000	PEAK
2		5460.000	16.185	45.215	61.400	-12.600	74.000	PEAK
3	*	5507.600	16.274	84.797	101.071	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 13 SISO B: Transmit (802.11ac-80BW_32.5Mbps)-Channel 106 (5530MHz)

Horizontal

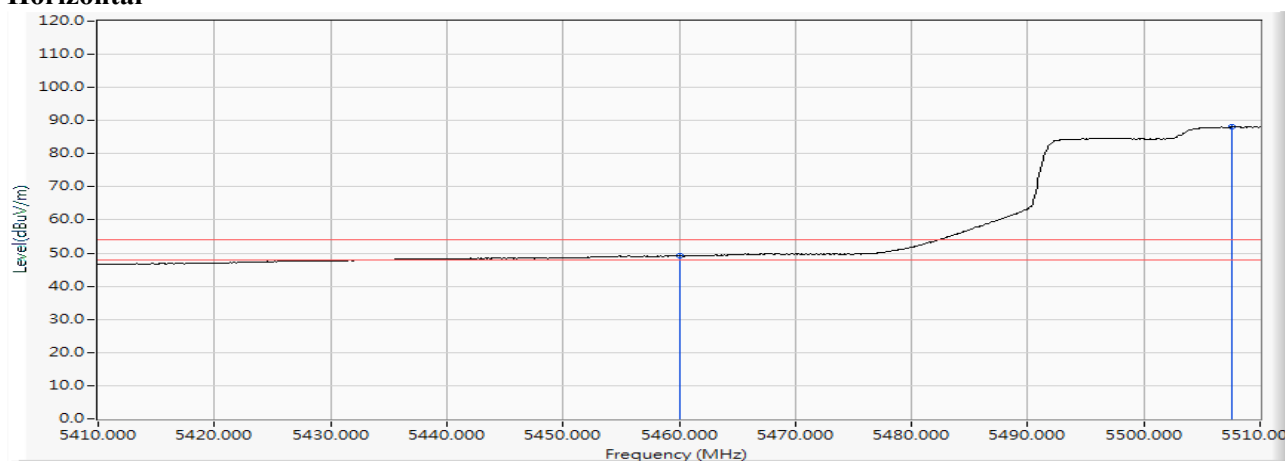


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5460.000	16.185	33.012	49.197	-4.803	54.000	AVERAGE
2	*	5507.600	16.274	71.812	88.086	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 13 SISO B: Transmit (802.11ac-80BW_32.5Mbps)-Channel 106 (5530MHz)

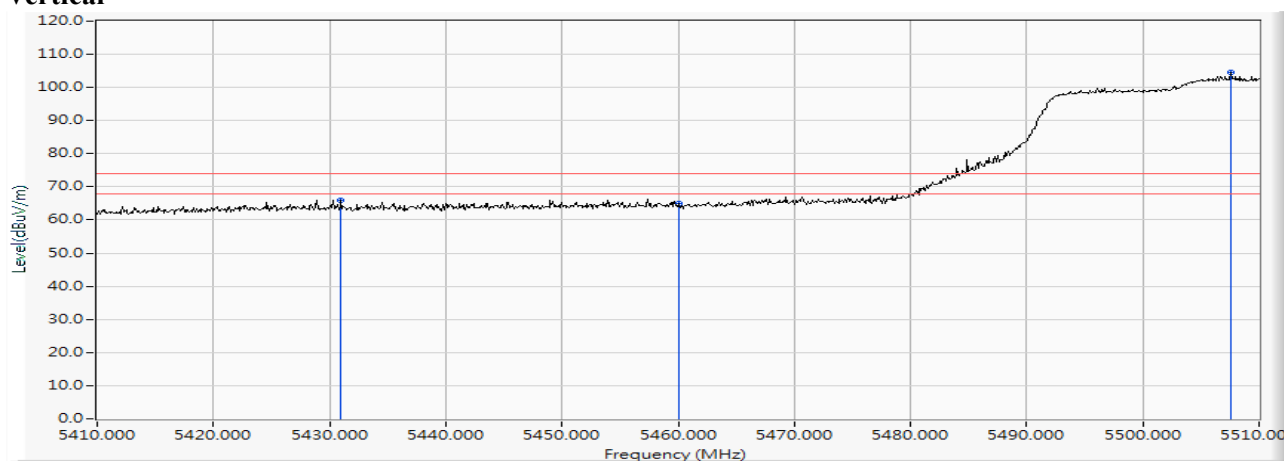
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5431.000	16.105	49.771	65.876	-8.124	74.000	PEAK
2		5460.000	16.185	48.823	65.008	-8.992	74.000	PEAK
3	*	5507.600	16.274	88.371	104.645	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 13 SISO B: Transmit (802.11ac-80BW_32.5Mbps)-Channel 106 (5530MHz)

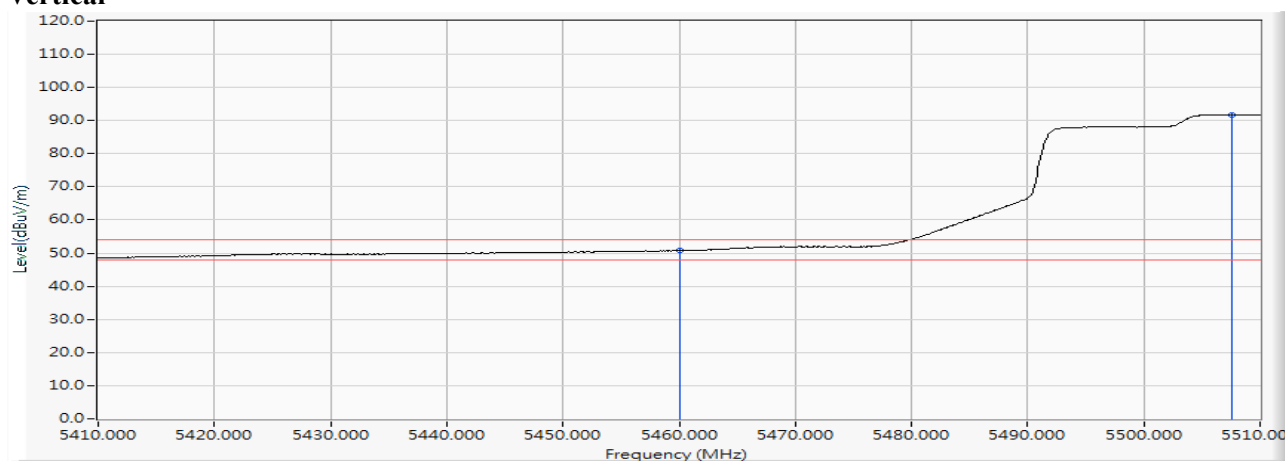Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5460.000	16.185	34.637	50.822	-3.178	54.000	AVERAGE
2	*	5507.600	16.274	75.551	91.825	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 13 SISO B: Transmit (802.11ac-80BW_32.5Mbps)-Channel 106 (5530MHz)

Horizontal

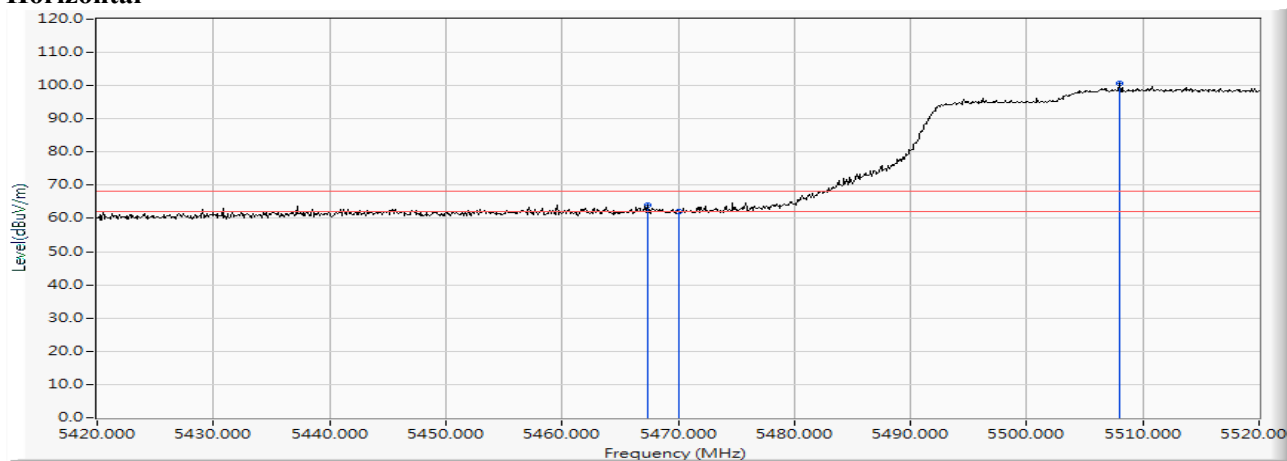

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5467.400	16.196	47.734	63.930	-4.290	68.220	PEAK
2		5470.000	16.200	45.975	62.175	-6.045	68.220	PEAK
3	*	5508.000	16.275	84.398	100.672	--	--	PEAK


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 13 SISO B: Transmit (802.11ac-80BW_32.5Mbps)-Channel 106 (5530MHz)

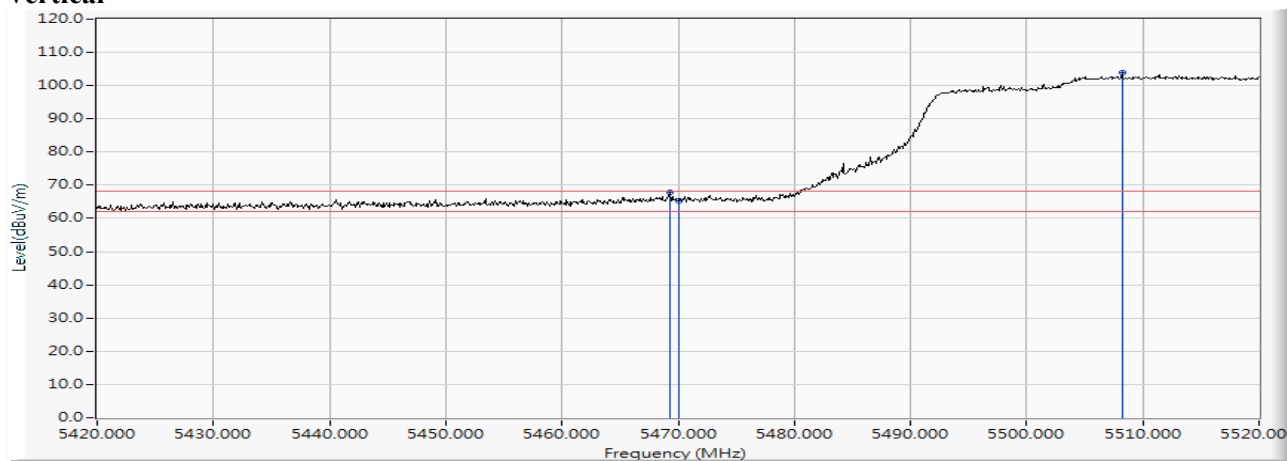Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5469.300	16.199	51.629	67.827	-0.393	68.220	PEAK
2		5470.000	16.200	49.238	65.438	-2.782	68.220	PEAK
3	*	5508.200	16.275	87.604	103.878	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 13 SISO B: Transmit (802.11ac-80BW_32.5Mbps)-Channel 155 (5775MHz)


Horizontal

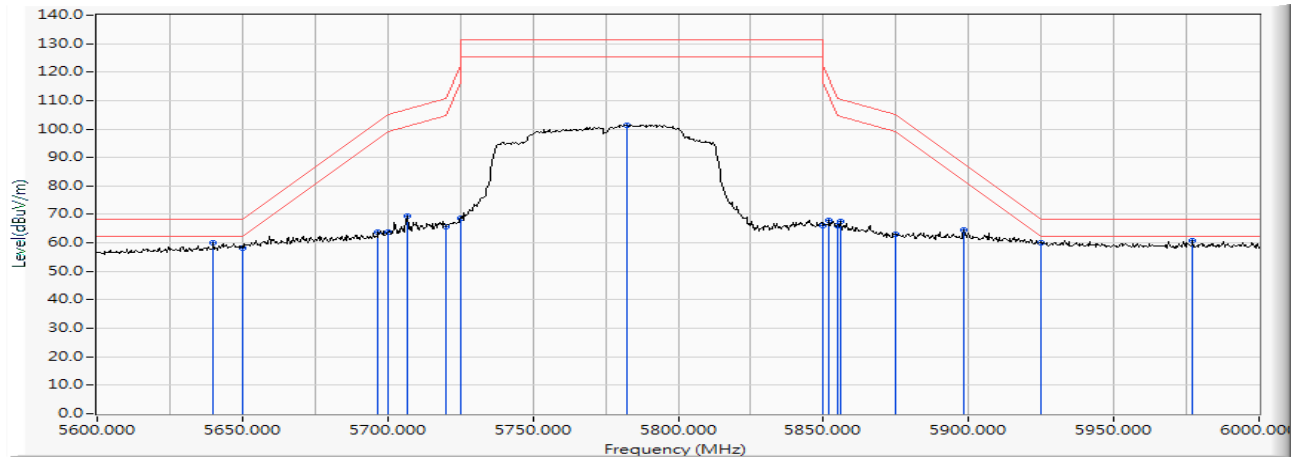

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5640.000	16.420	43.564	59.984	-8.236	68.220	PEAK
2		5650.000	16.447	41.762	58.209	-10.011	68.220	PEAK
3		5696.800	16.497	47.257	63.755	-39.078	102.833	PEAK
4		5700.000	16.502	47.141	63.643	-41.557	105.200	PEAK
5		5706.800	16.510	52.809	69.319	-37.785	107.104	PEAK
6		5720.000	16.535	49.186	65.721	-45.079	110.800	PEAK
7		5725.000	16.544	52.058	68.602	-53.598	122.200	PEAK
8		5782.400	16.613	84.896	101.509	--	--	PEAK
9		5850.000	16.748	49.496	66.244	-55.956	122.200	PEAK
10		5852.000	16.751	51.246	67.997	-49.643	117.640	PEAK
11		5855.000	16.758	49.414	66.172	-44.628	110.800	PEAK
12		5856.000	16.761	50.766	67.527	-42.993	110.520	PEAK
13		5875.000	16.807	46.245	63.053	-42.147	105.200	PEAK
14		5898.400	16.858	47.584	64.442	-23.442	87.884	PEAK
15		5925.000	16.920	43.048	59.968	-8.232	68.200	PEAK
16	*	5977.200	17.015	43.849	60.864	-7.336	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 13 SISO B: Transmit (802.11ac-80BW_32.5Mbps)-Channel 155 (5775MHz)


Vertical

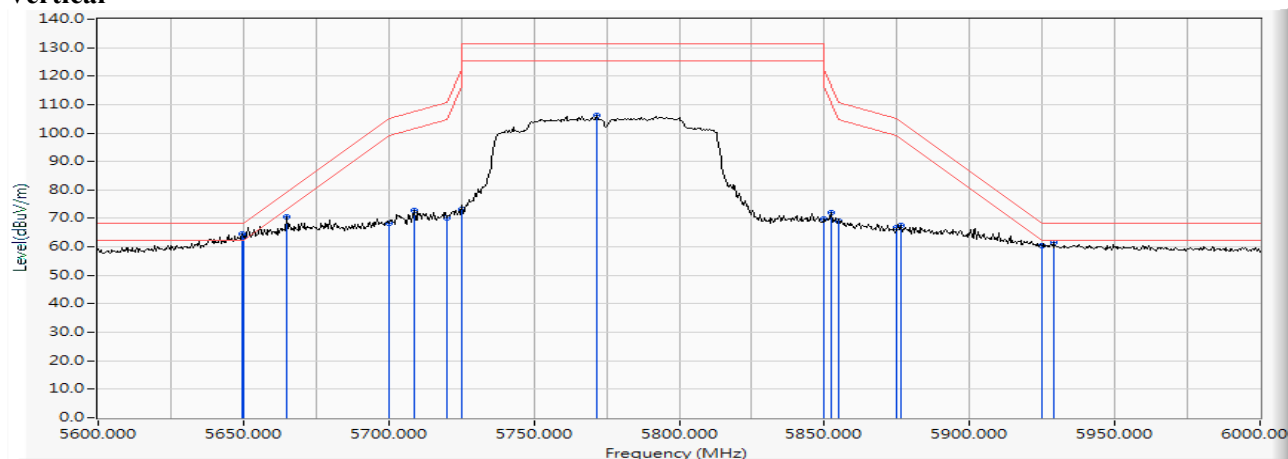

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5649.600	16.446	47.938	64.384	-3.836	68.220	PEAK
2		5650.000	16.447	46.840	63.287	-4.933	68.220	PEAK
3		5664.800	16.466	54.242	70.708	-8.458	79.166	PEAK
4		5700.000	16.502	51.909	68.411	-36.789	105.200	PEAK
5		5708.800	16.513	56.192	72.705	-34.959	107.664	PEAK
6		5720.000	16.535	53.635	70.170	-40.630	110.800	PEAK
7		5725.000	16.544	56.666	73.210	-48.990	122.200	PEAK
8		5771.600	16.598	89.492	106.090	--	--	PEAK
9		5850.000	16.748	53.191	69.939	-52.261	122.200	PEAK
10		5852.400	16.752	55.149	71.901	-44.827	116.728	PEAK
11		5855.000	16.758	52.350	69.108	-41.692	110.800	PEAK
12		5875.000	16.807	49.856	66.664	-38.536	105.200	PEAK
13		5876.400	16.812	50.798	67.609	-36.555	104.164	PEAK
14		5925.000	16.920	43.389	60.309	-7.891	68.200	PEAK
15		5928.800	16.924	44.632	61.556	-6.644	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 14 SISO B: Transmit (802.11ac-160BW_65Mbps)-Channel 50 (5250MHz)

Horizontal

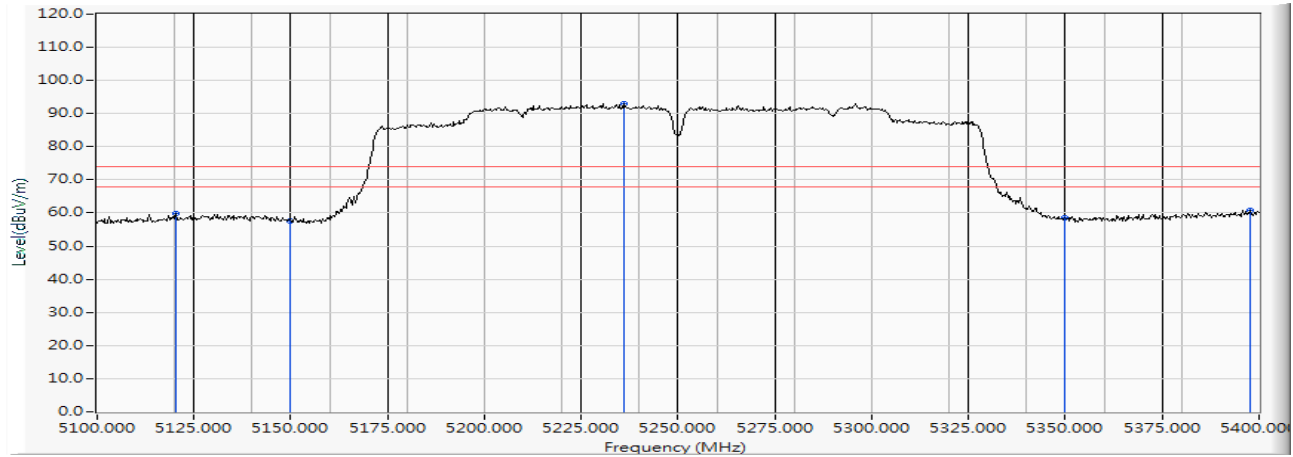


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5120.400	15.170	44.676	59.846	-14.154	74.000	PEAK
2		5150.000	15.307	42.205	57.512	-16.488	74.000	PEAK
3	*	5235.900	15.621	77.249	92.870	--	--	PEAK
4		5350.000	15.912	42.583	58.495	-15.505	74.000	PEAK
5		5397.600	16.026	44.828	60.854	-13.146	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 14 SISO B: Transmit (802.11ac-160BW_65Mbps)-Channel 50 (5250MHz)

Horizontal

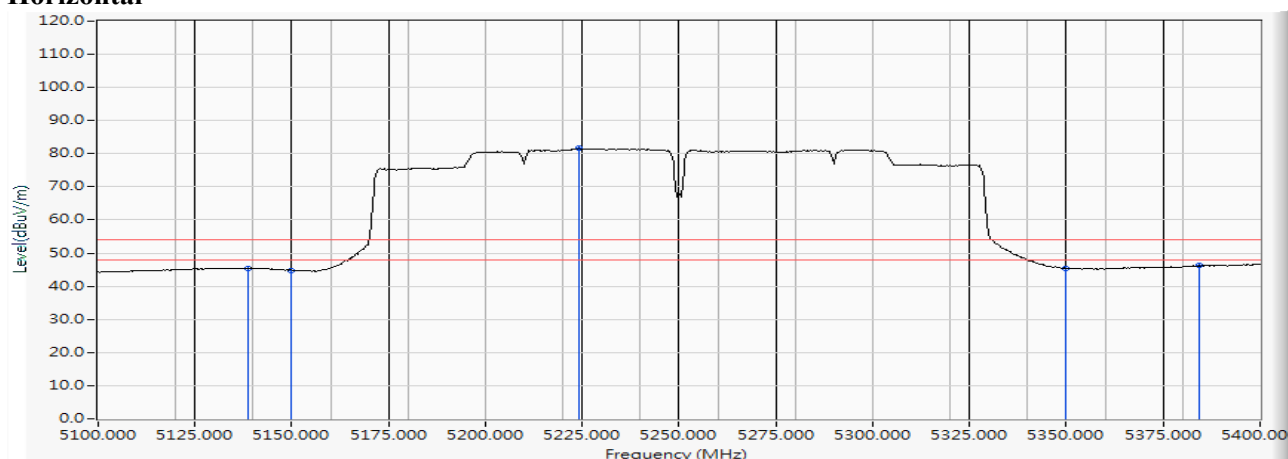


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5138.700	15.243	30.150	45.393	-8.607	54.000	AVERAGE
2		5150.000	15.307	29.550	44.857	-9.143	54.000	AVERAGE
3	*	5224.200	15.589	65.989	81.578	--	--	AVERAGE
4		5350.000	15.912	29.561	45.473	-8.527	54.000	AVERAGE
5		5384.400	16.012	30.249	46.261	-7.739	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 14 SISO B: Transmit (802.11ac-160BW_65Mbps)-Channel 50 (5250MHz)

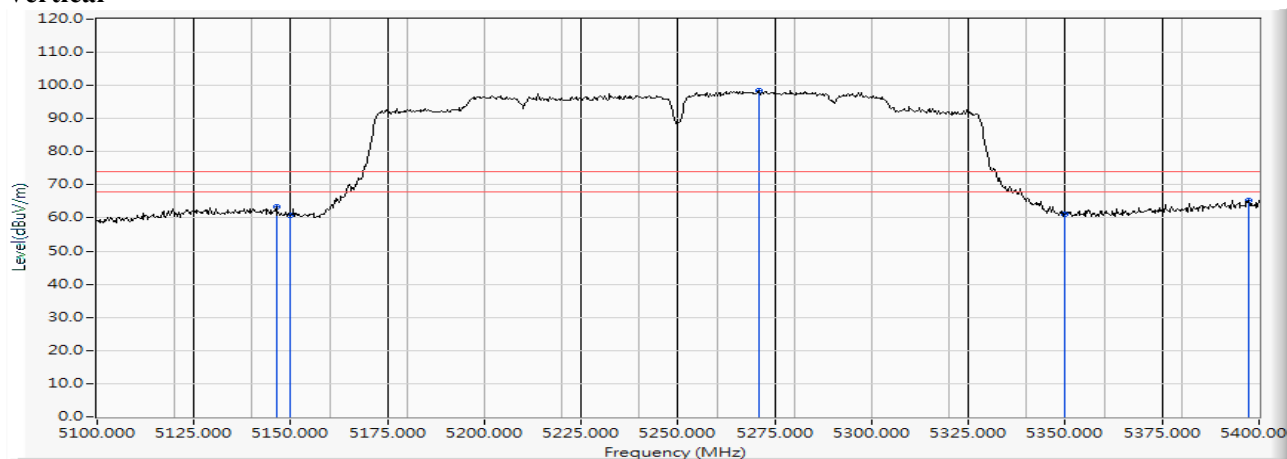
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5146.200	15.285	48.080	63.365	-10.635	74.000	PEAK
2		5150.000	15.307	45.627	60.934	-13.066	74.000	PEAK
3	*	5270.700	15.726	82.638	98.364	--	--	PEAK
4		5350.000	15.912	45.220	61.132	-12.868	74.000	PEAK
5		5397.300	16.026	49.261	65.286	-8.714	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 14 SISO B: Transmit (802.11ac-160BW_65Mbps)-Channel 50 (5250MHz)

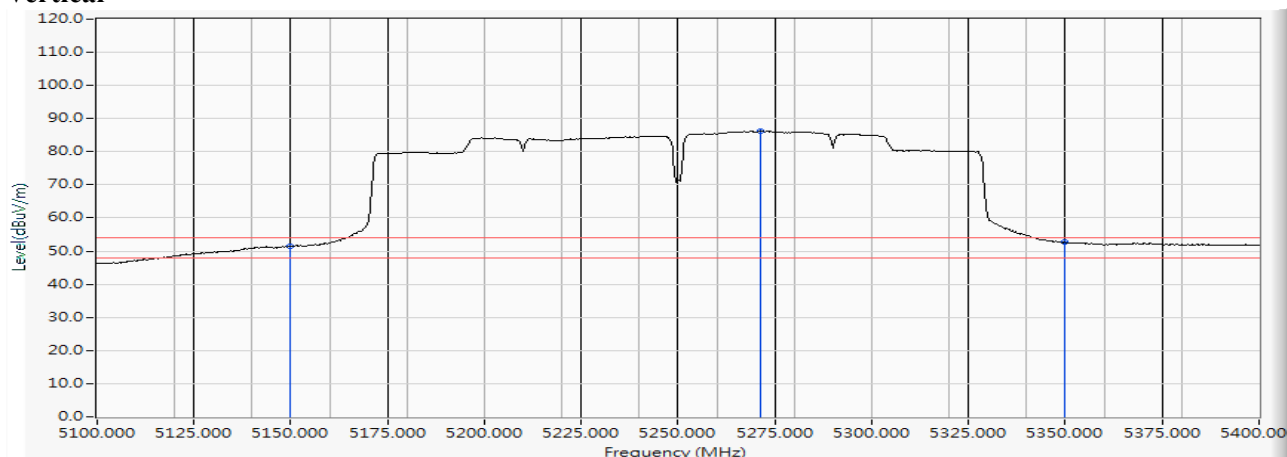Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	36.059	51.366	-2.634	54.000	AVERAGE
2	*	5271.300	15.727	70.422	86.149	--	--	AVERAGE
3		5350.000	15.912	36.706	52.618	-1.382	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 14 SISO B: Transmit (802.11ac-160BW_65Mbps)-Channel 114 (5570MHz)

Horizontal

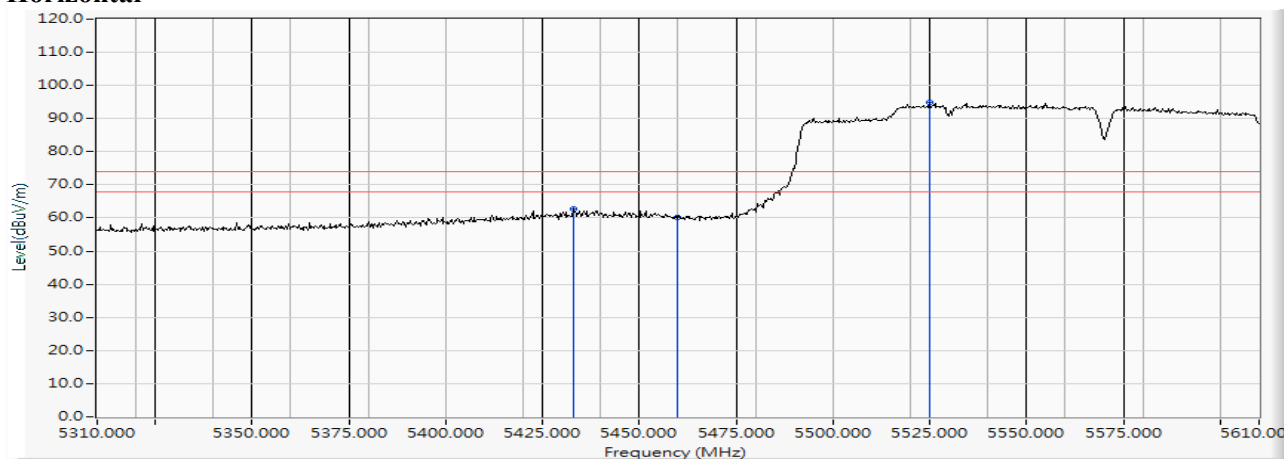


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5433.000	16.110	46.489	62.599	-11.401	74.000	PEAK
2		5460.000	16.185	43.825	60.010	-13.990	74.000	PEAK
3	*	5524.800	16.300	78.664	94.965	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 14 SISO B: Transmit (802.11ac-160BW_65Mbps)-Channel 114 (5570MHz)

Horizontal

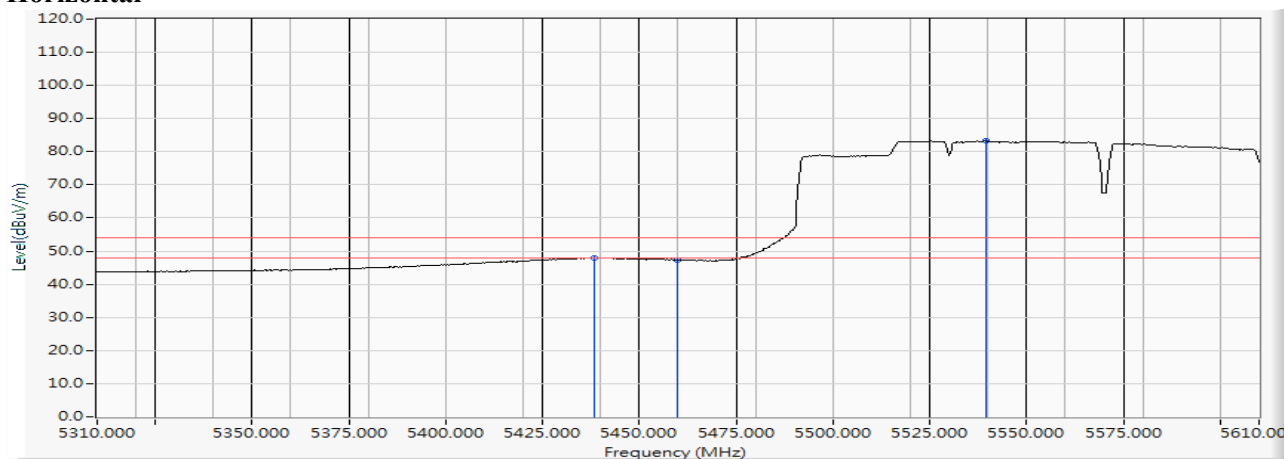


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5438.400	16.120	31.858	47.978	-6.022	54.000	AVERAGE
2		5460.000	16.185	31.078	47.263	-6.737	54.000	AVERAGE
3	*	5539.500	16.318	66.918	83.236	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 14 SISO B: Transmit (802.11ac-160BW_65Mbps)-Channel 114 (5570MHz)

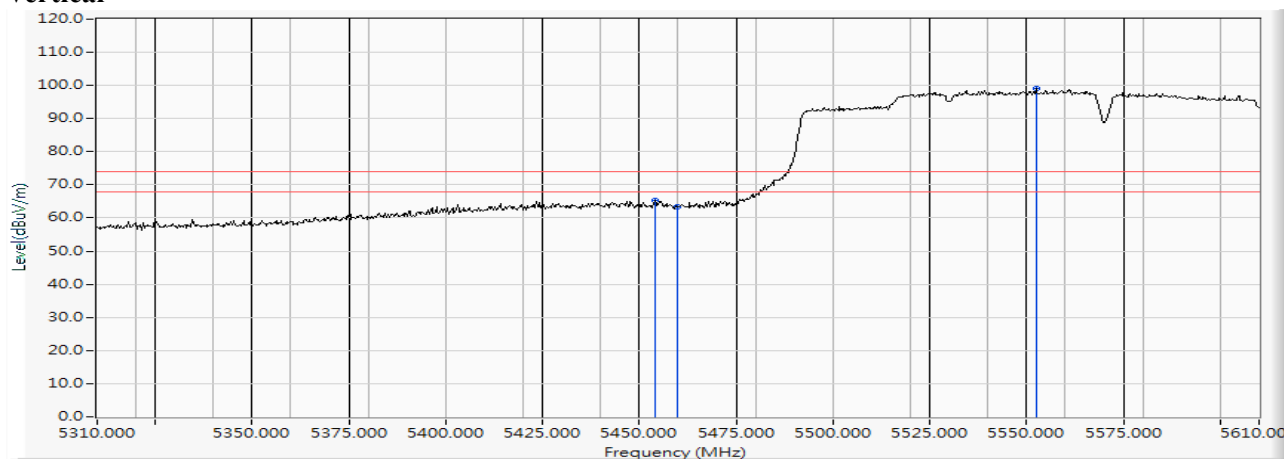
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5454.000	16.170	49.147	65.317	-8.683	74.000	PEAK
2		5460.000	16.185	47.177	63.362	-10.638	74.000	PEAK
3	*	5552.400	16.325	82.705	99.029	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 14 SISO B: Transmit (802.11ac-160BW_65Mbps)-Channel 114 (5570MHz)

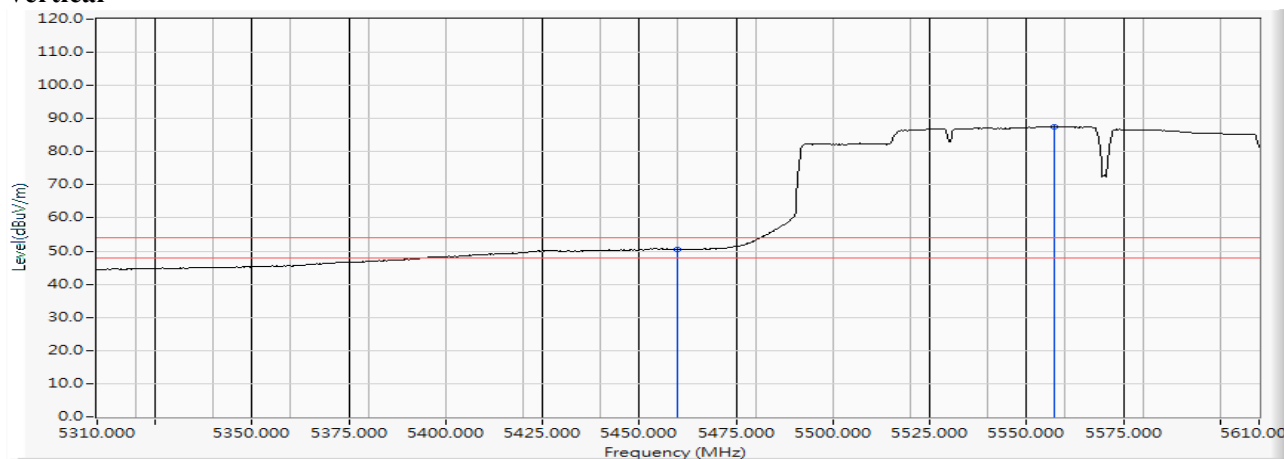Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5460.000	16.185	34.321	50.506	-3.494	54.000	AVERAGE
2	*	5557.200	16.324	71.304	87.629	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 14 SISO B: Transmit (802.11ac-160BW_65Mbps)-Channel 114 (5570MHz)


Horizontal

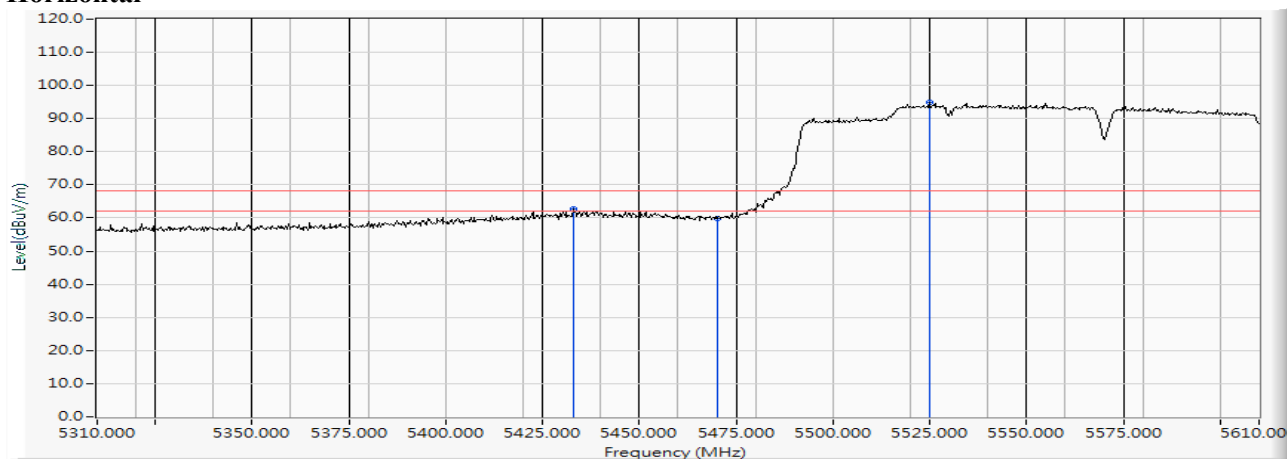

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5433.000	16.110	46.489	62.599	-5.621	68.220	PEAK
2		5470.000	16.200	43.662	59.862	-8.358	68.220	PEAK
3	*	5524.800	16.300	78.664	94.965	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 14 SISO B: Transmit (802.11ac-160BW_65Mbps)-Channel 114 (5570MHz)


Vertical

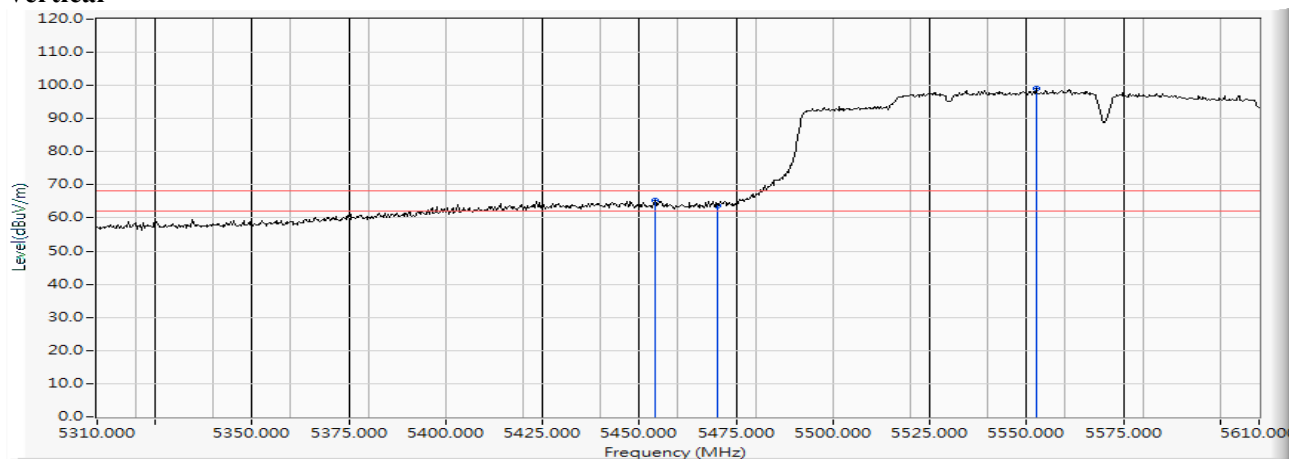

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5454.000	16.170	49.147	65.317	-2.903	68.220	PEAK
2		5470.000	16.200	47.419	63.619	-4.601	68.220	PEAK
3	*	5552.400	16.325	82.705	99.029	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 36 (5180MHz)

Horizontal

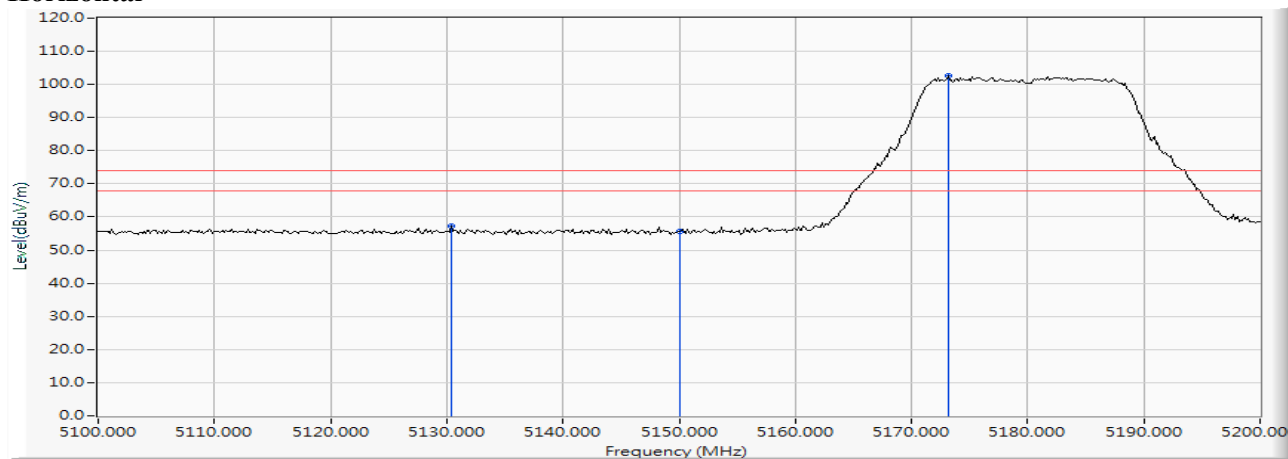


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5130.435	15.203	41.922	57.125	-16.875	74.000	PEAK
2		5150.000	15.307	40.411	55.718	-18.282	74.000	PEAK
3	*	5173.188	15.362	87.148	102.510	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 36 (5180MHz)

Horizontal

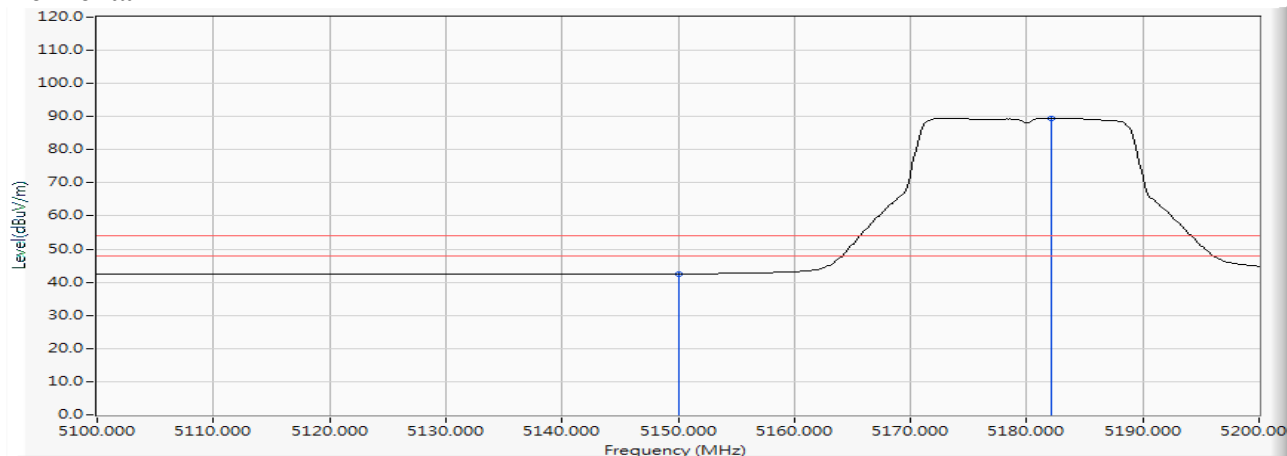


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	27.225	42.532	-11.468	54.000	AVERAGE
2	*	5182.174	15.401	74.158	89.560	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 36 (5180MHz)

Vertical

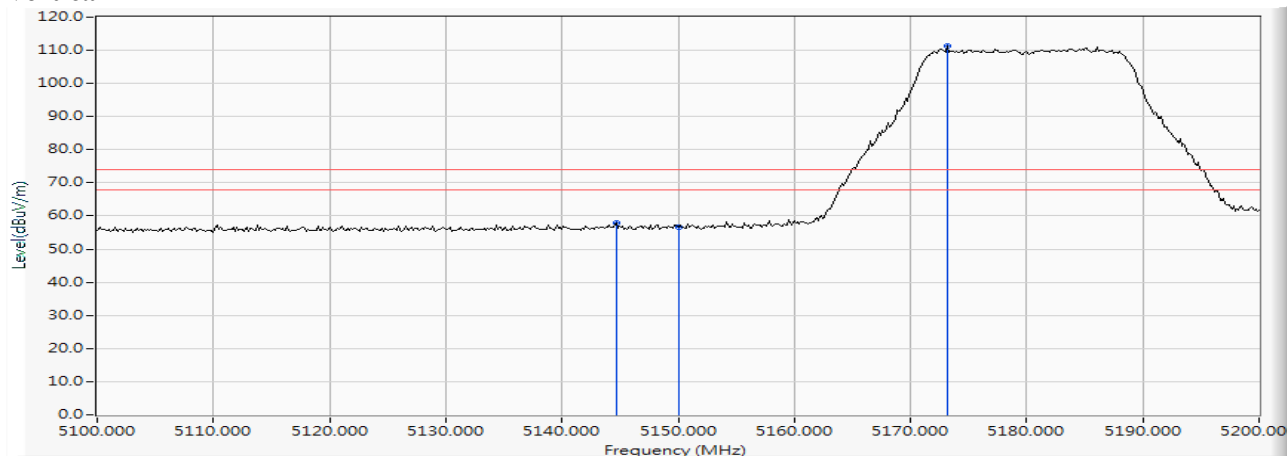


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5144.638	15.276	42.578	57.854	-16.146	74.000	PEAK
2		5150.000	15.307	41.187	56.494	-17.506	74.000	PEAK
3	*	5173.188	15.362	96.008	111.370	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 36 (5180MHz)

Vertical

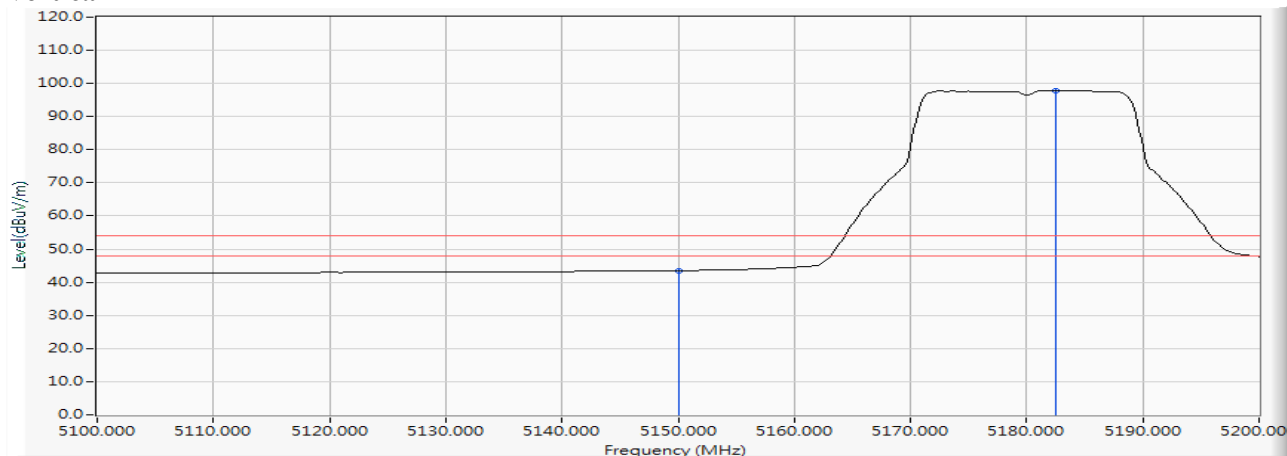


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	28.130	43.437	-10.563	54.000	AVERAGE
2	*	5182.464	15.403	82.510	97.913	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 64 (5320MHz)

Horizontal

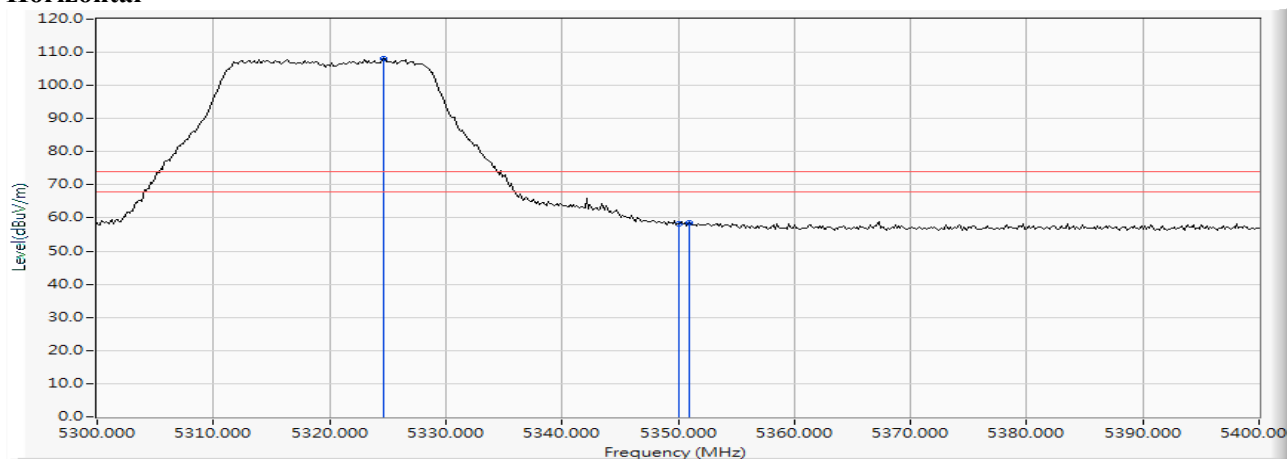


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5324.638	15.865	92.112	107.977	--	--	PEAK
2		5350.000	15.912	42.260	58.172	-15.828	74.000	PEAK
3		5351.014	15.915	42.499	58.414	-15.586	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 64 (5320MHz)

Horizontal

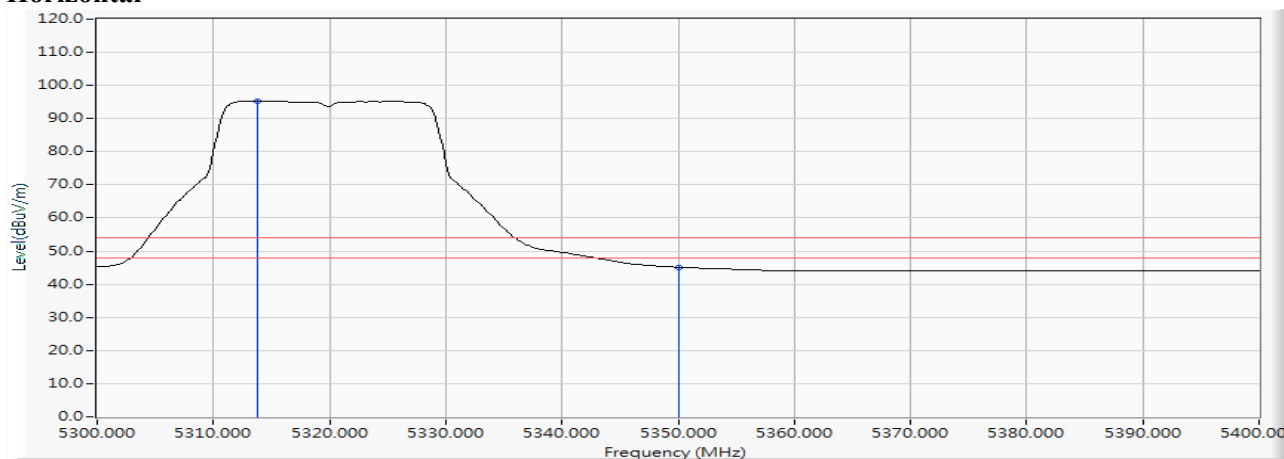


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5313.768	15.830	79.422	95.252	--	--	AVERAGE
2		5350.000	15.912	29.244	45.156	-8.844	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 64 (5320MHz)

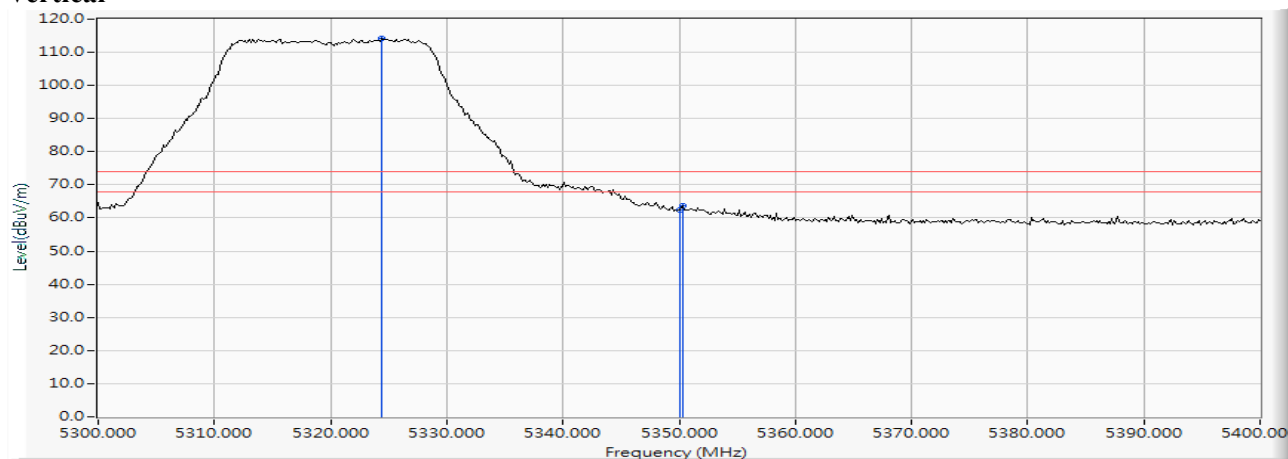
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5324.348	15.863	98.330	114.194	--	--	PEAK
2		5350.000	15.912	46.372	62.284	-11.716	74.000	PEAK
3		5350.290	15.913	47.691	63.604	-10.396	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 64 (5320MHz)

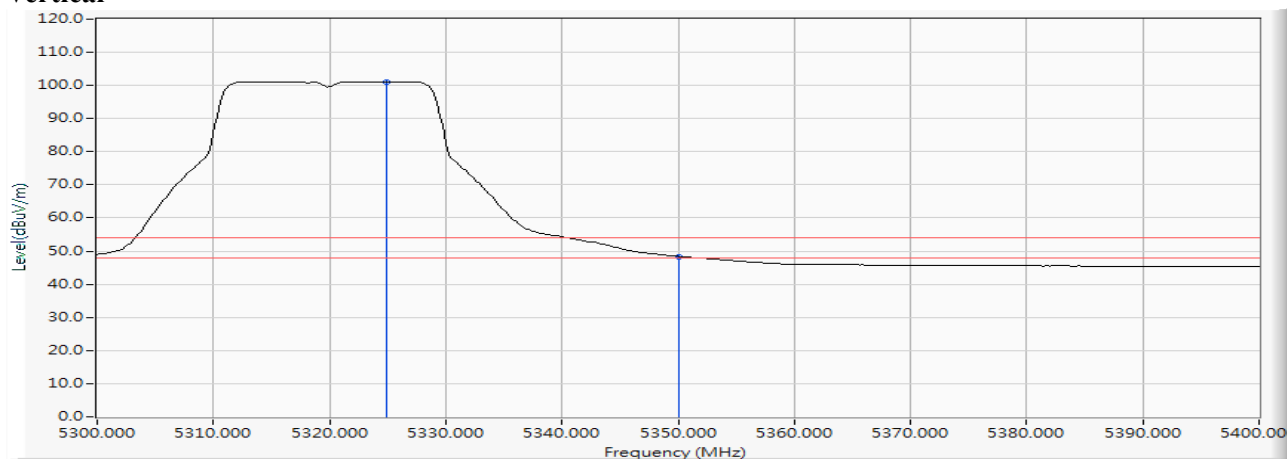Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5324.928	15.866	85.309	101.175	--	--	AVERAGE
2		5350.000	15.912	32.495	48.407	-5.593	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 100 (5500MHz)

Horizontal

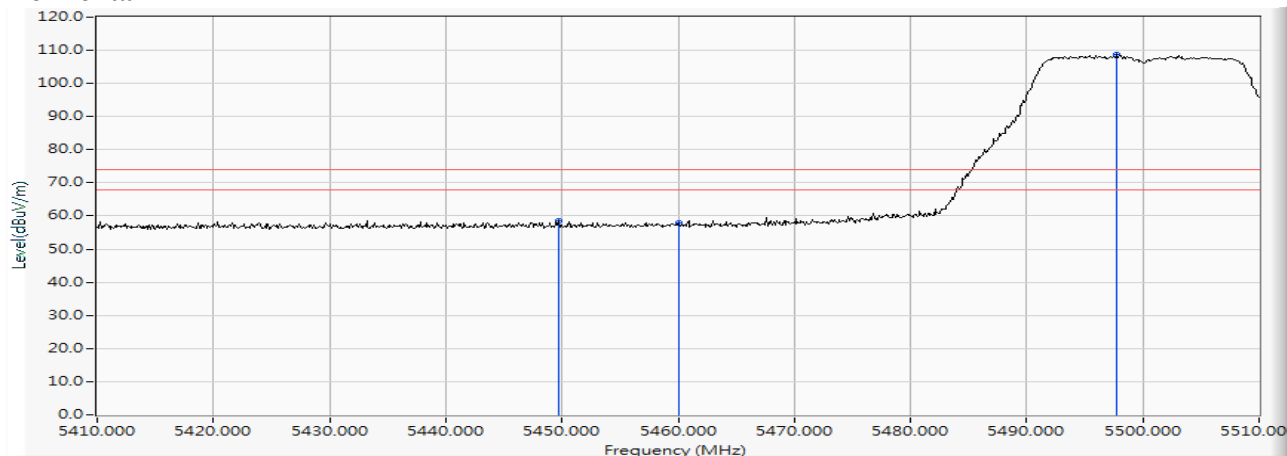


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5449.700	16.156	42.543	58.699	-15.301	74.000	PEAK
2		5460.000	16.185	41.597	57.782	-16.218	74.000	PEAK
3	*	5497.800	16.266	92.437	108.704	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 100 (5500MHz)

Horizontal

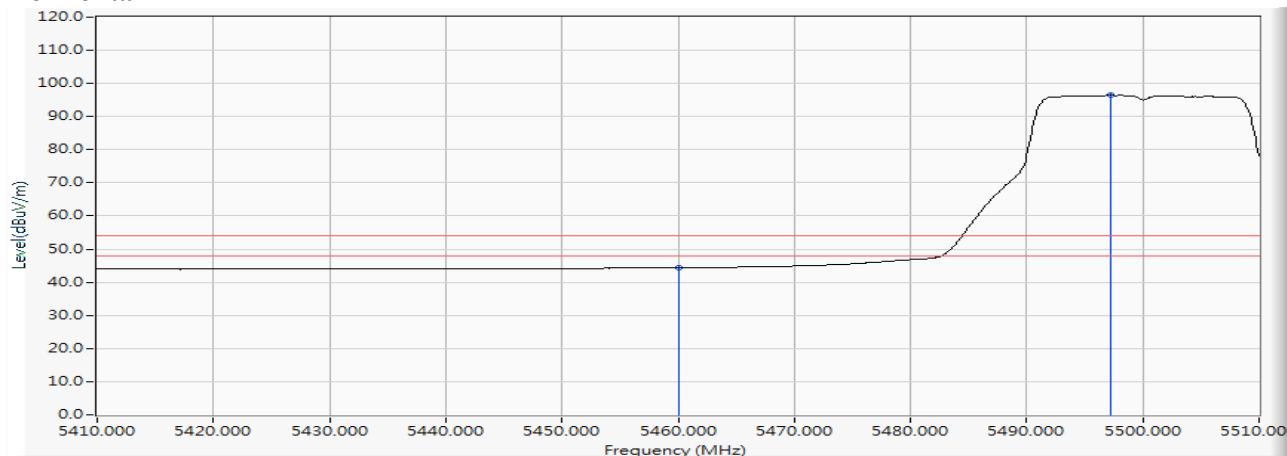


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5460.000	16.185	28.144	44.329	-9.671	54.000	AVERAGE
2	*	5497.200	16.267	80.128	96.395	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 100 (5500MHz)

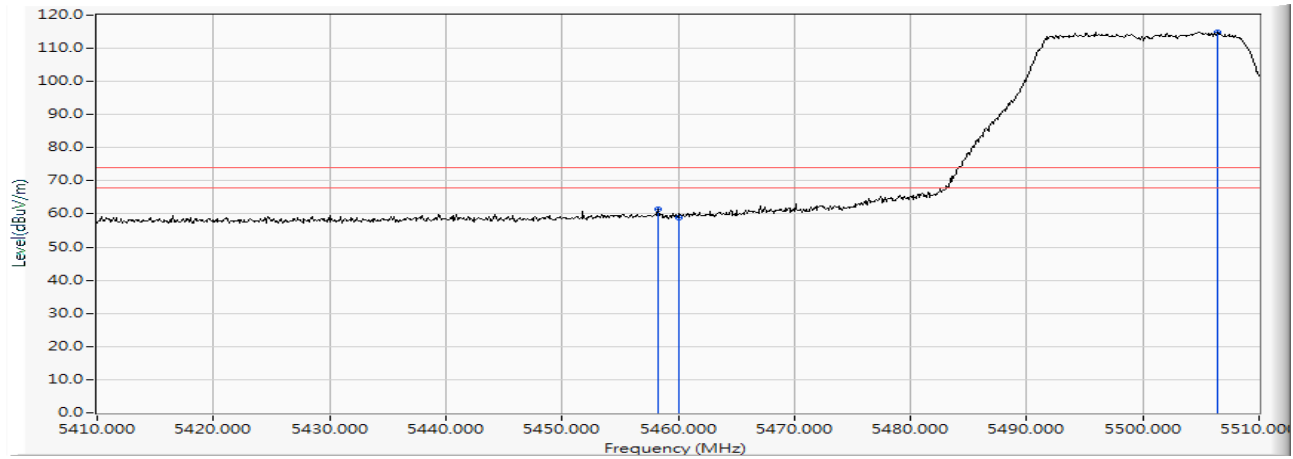
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5458.300	16.182	45.217	61.399	-12.601	74.000	PEAK
2		5460.000	16.185	42.833	59.018	-14.982	74.000	PEAK
3	*	5506.400	16.273	98.676	114.949	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 100 (5500MHz)

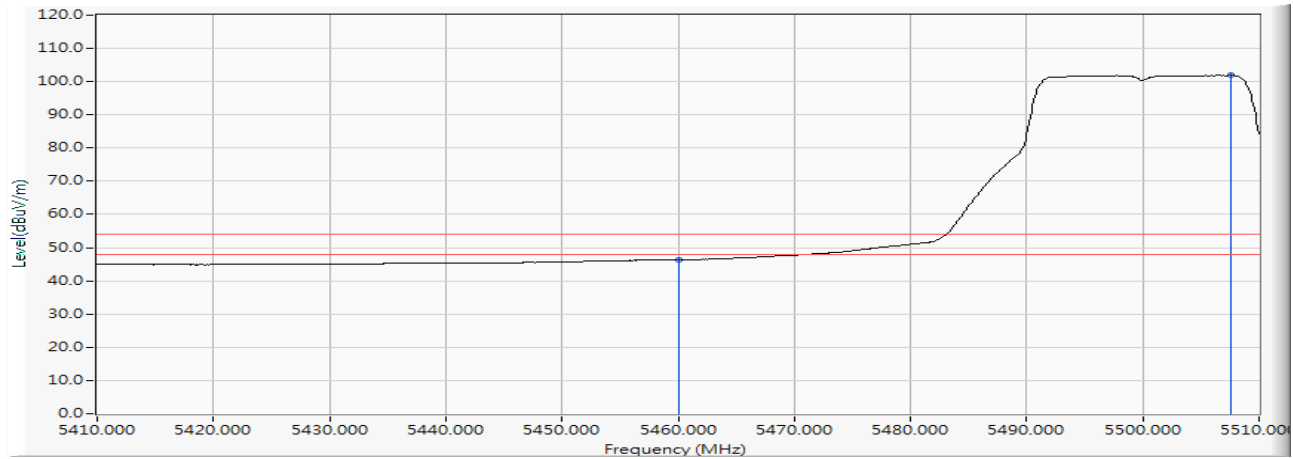Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5460.000	16.185	30.180	46.365	-7.635	54.000	AVERAGE
2	*	5507.600	16.274	85.599	101.873	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/03/30
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 100 (5500MHz)


Horizontal

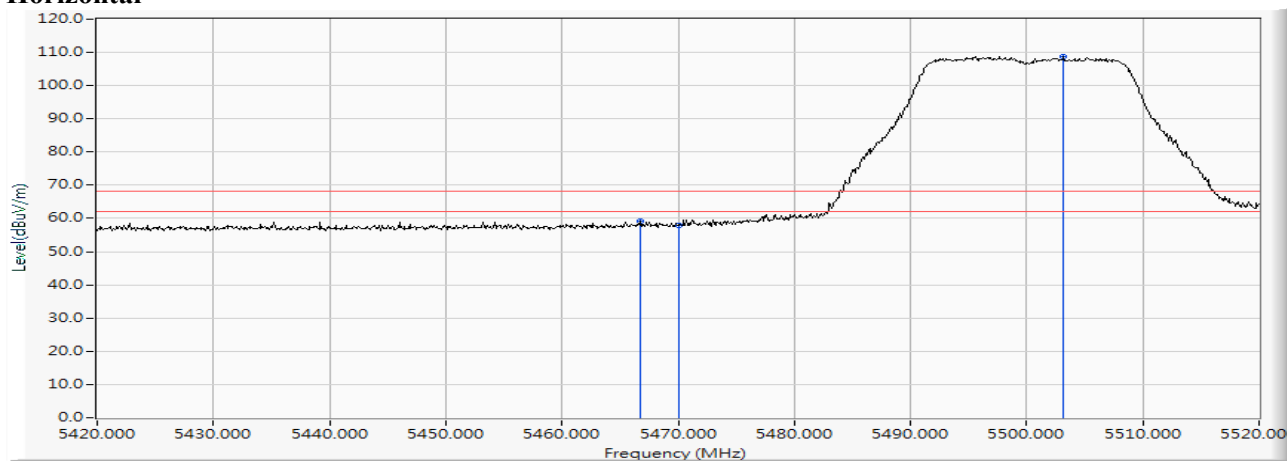

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5466.800	16.195	43.056	59.251	-8.969	68.220	PEAK
2		5470.000	16.200	41.616	57.816	-10.404	68.220	PEAK
3	*	5503.200	16.273	92.481	108.754	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/03/30
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 100 (5500MHz)


Vertical

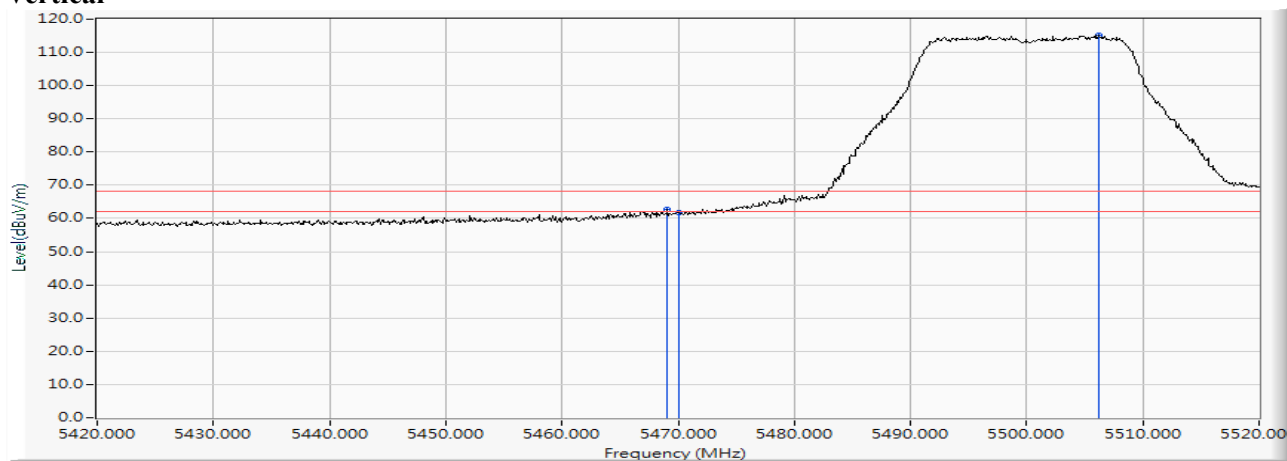

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5469.100	16.198	46.512	62.710	-5.510	68.220	PEAK
2		5470.000	16.200	45.482	61.682	-6.538	68.220	PEAK
3	*	5506.200	16.273	98.786	115.059	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 140 (5700MHz)


Horizontal

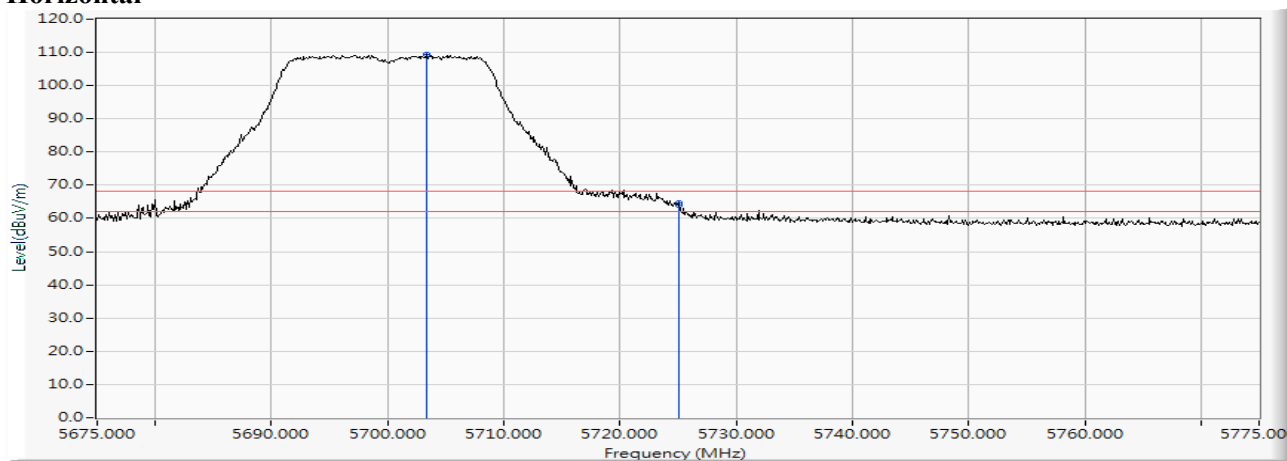

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5703.300	16.506	92.775	109.281	--	--	PEAK
2		5725.000	16.544	47.318	63.862	-4.358	68.220	PEAK
3		5725.100	16.544	48.016	64.560	-3.660	68.220	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 140 (5700MHz)


Vertical

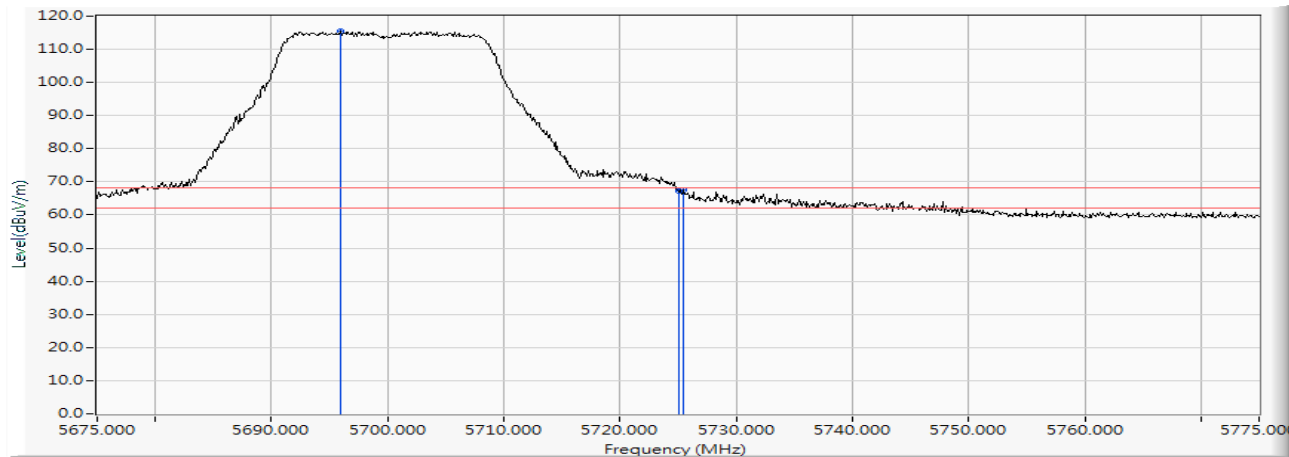

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5696.000	16.497	99.027	115.524	--	--	PEAK
2		5725.000	16.544	50.811	67.355	-0.865	68.220	PEAK
3		5725.500	16.545	51.122	67.667	-0.553	68.220	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 149 (5745MHz)


Horizontal

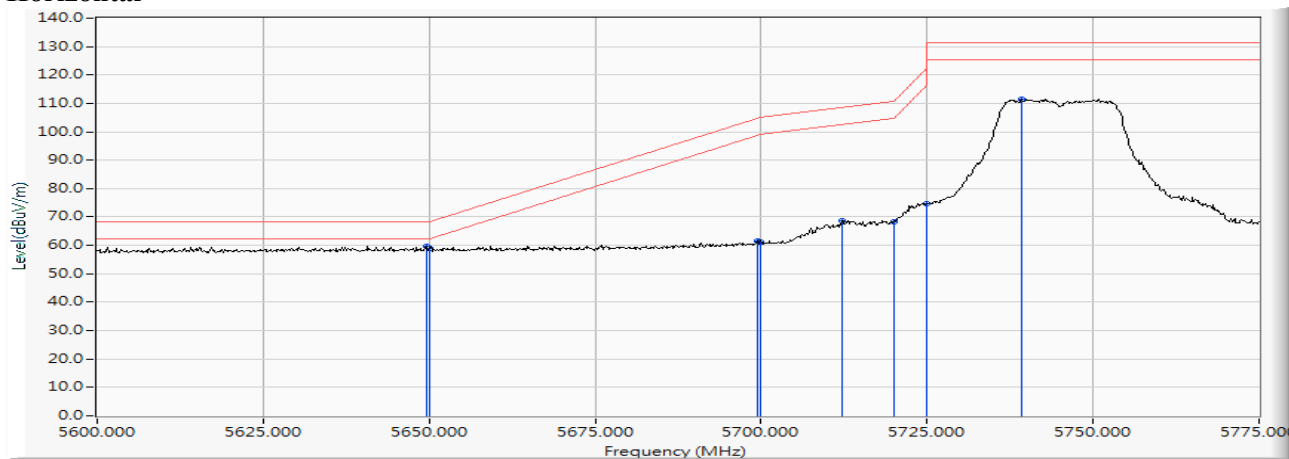

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5649.525	16.446	43.368	59.813	-8.407	68.220	PEAK
2		5650.000	16.447	42.502	58.949	-9.271	68.220	PEAK
3		5699.400	16.501	45.161	61.662	-43.094	104.756	PEAK
4		5700.000	16.502	44.838	61.340	-43.860	105.200	PEAK
5		5712.175	16.520	52.253	68.773	-39.836	108.609	PEAK
6		5720.000	16.535	51.873	68.408	-42.392	110.800	PEAK
7		5725.000	16.544	58.105	74.649	-47.551	122.200	PEAK
8	*	5739.300	16.555	94.914	111.469	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 149 (5745MHz)


Vertical

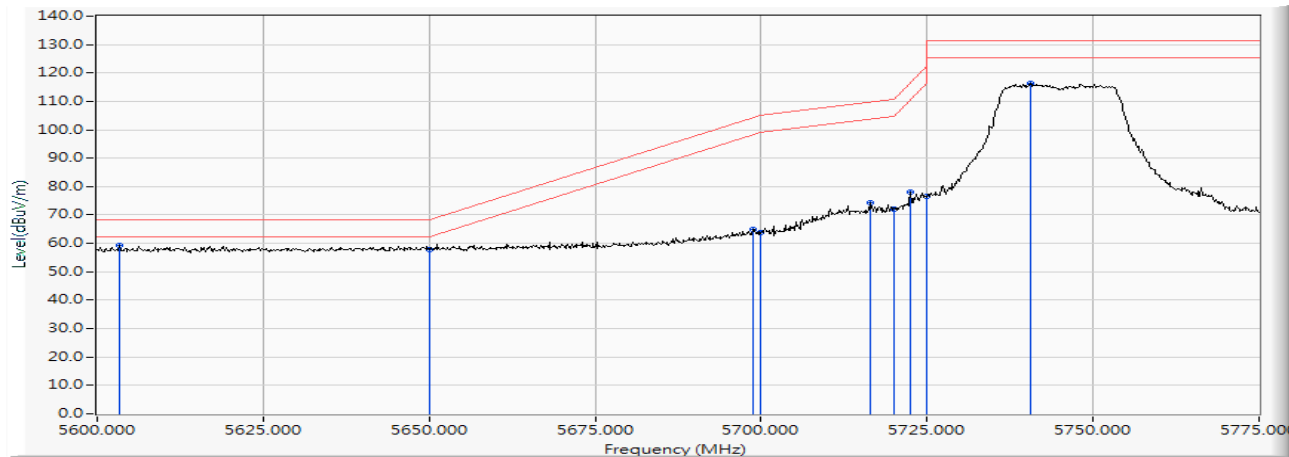

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5603.325	16.388	43.041	59.428	-8.792	68.220	PEAK
2		5650.000	16.447	41.467	57.914	-10.306	68.220	PEAK
3		5698.700	16.500	48.368	64.868	-39.371	104.239	PEAK
4		5700.000	16.502	47.378	63.880	-41.320	105.200	PEAK
5		5716.375	16.528	57.718	74.246	-35.539	109.785	PEAK
6		5720.000	16.535	55.627	72.162	-38.638	110.800	PEAK
7		5722.500	16.540	61.386	77.926	-38.574	116.500	PEAK
8		5725.000	16.544	59.879	76.423	-45.777	122.200	PEAK
9	*	5740.525	16.556	99.622	116.178	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 165 (5825MHz)


Horizontal

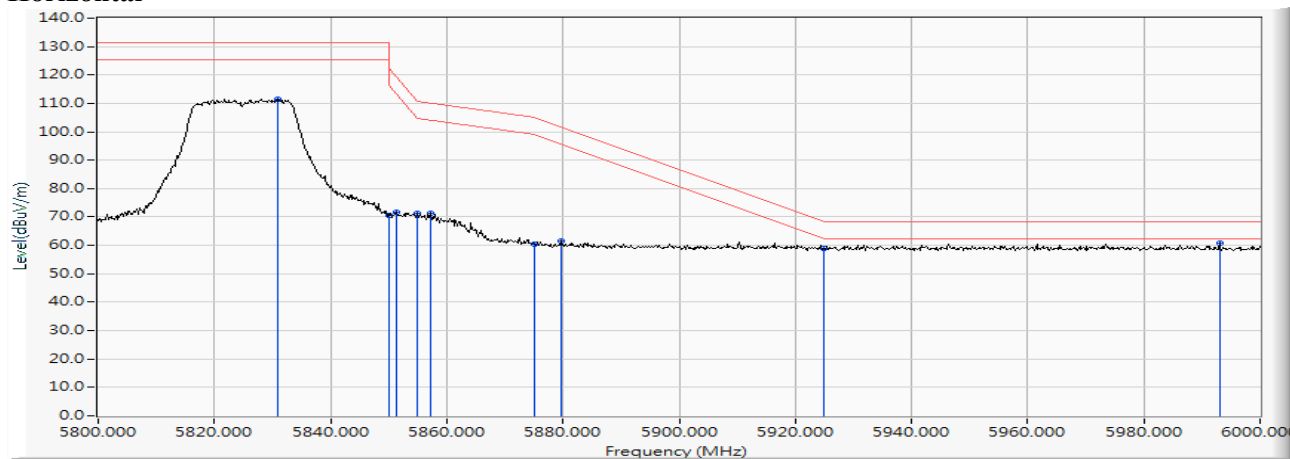

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5830.800	16.720	94.872	111.592	--	--	PEAK
2		5850.000	16.748	54.001	70.749	-51.451	122.200	PEAK
3		5851.400	16.750	54.920	71.670	-47.338	119.008	PEAK
4		5855.000	16.758	54.510	71.268	-39.532	110.800	PEAK
5		5857.200	16.763	54.536	71.299	-38.885	110.184	PEAK
6		5875.000	16.807	43.480	60.288	-44.912	105.200	PEAK
7		5879.600	16.820	44.707	61.527	-40.269	101.796	PEAK
8		5925.000	16.920	42.027	58.947	-9.253	68.200	PEAK
9		5993.000	17.041	43.691	60.732	-7.468	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 19 MIMO: Transmit (802.11n-20BW_14.4Mbps)-Channel 165 (5825MHz)


Vertical

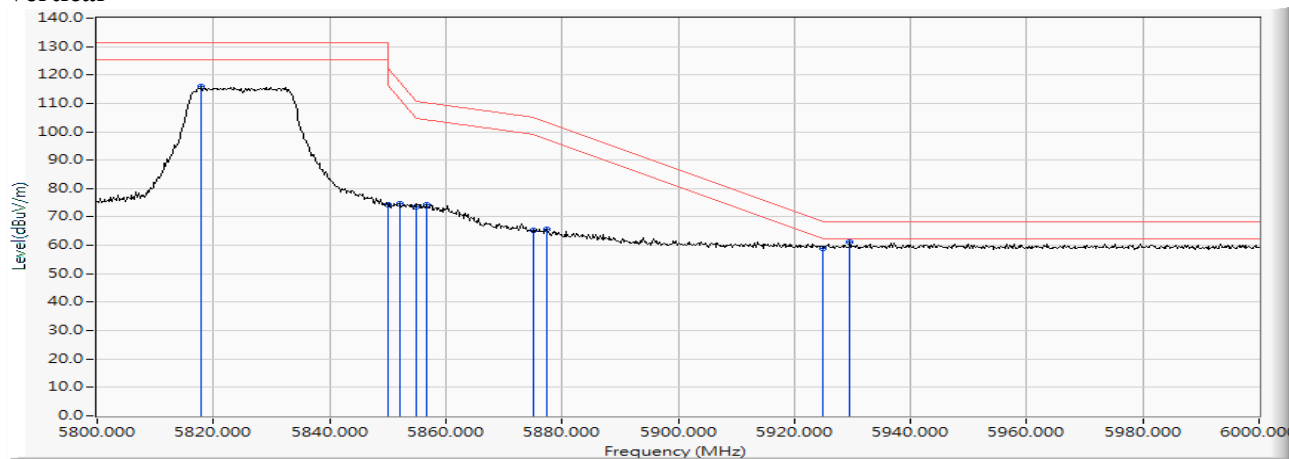

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5818.000	16.702	99.367	116.069	--	--	PEAK
2		5850.000	16.748	57.694	74.442	-47.758	122.200	PEAK
3		5852.000	16.751	57.864	74.615	-43.025	117.640	PEAK
4		5855.000	16.758	56.846	73.604	-37.196	110.800	PEAK
5		5856.000	16.761	57.643	74.405	-35.947	110.352	PEAK
6		5875.000	16.807	48.517	65.325	-39.875	105.200	PEAK
7		5877.400	16.814	48.838	65.652	-37.772	103.424	PEAK
8		5925.000	16.920	42.092	59.012	-9.188	68.200	PEAK
9		5929.600	16.924	44.191	61.116	-7.084	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 38 (5190MHz)

Horizontal

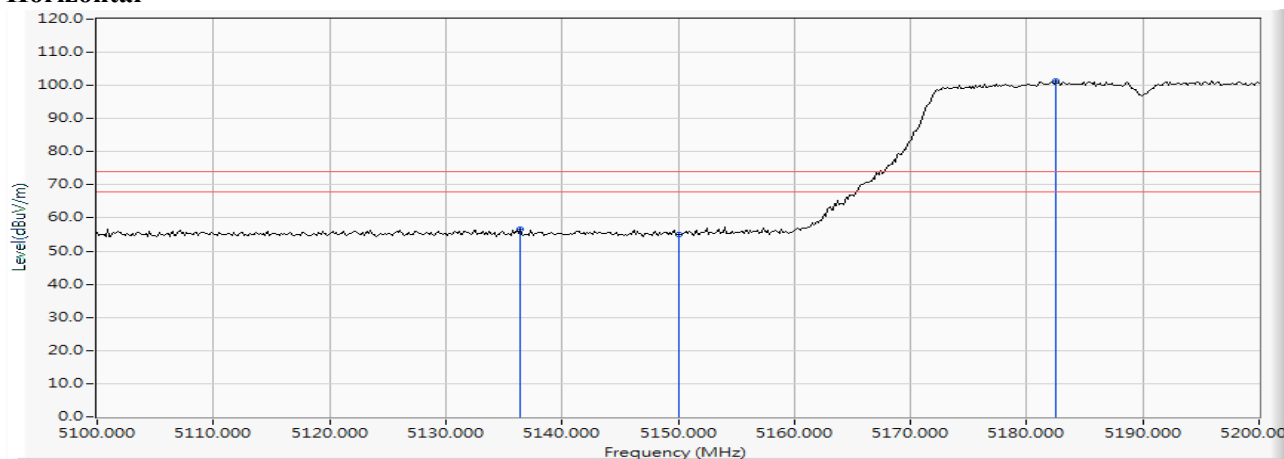


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5136.377	15.231	41.418	56.648	-17.352	74.000	PEAK
2		5150.000	15.307	39.724	55.031	-18.969	74.000	PEAK
3	*	5182.464	15.403	85.859	101.262	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 38 (5190MHz)

Horizontal

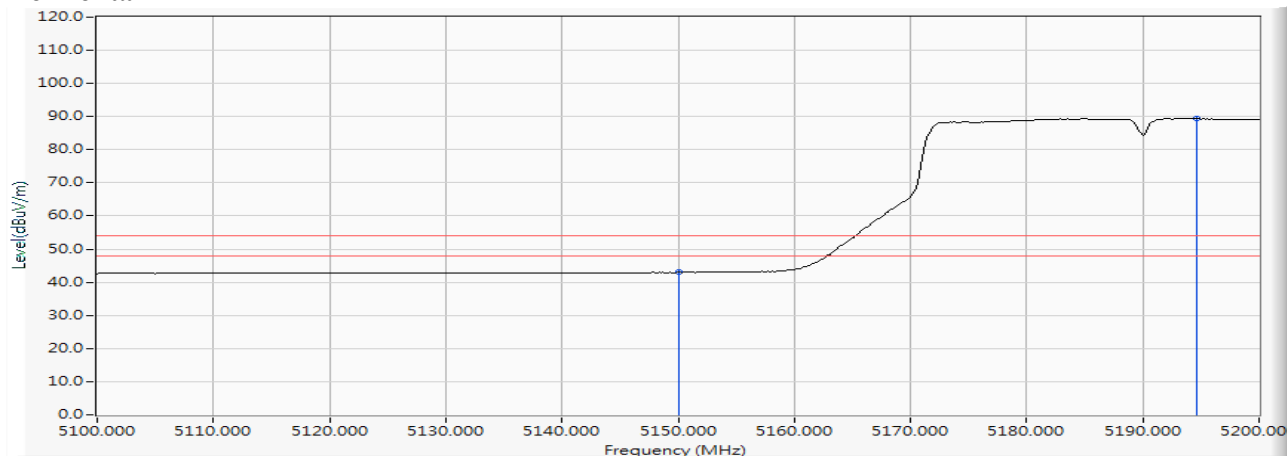


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	27.697	43.004	-10.996	54.000	AVERAGE
2	*	5194.638	15.452	73.950	89.402	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 38 (5190MHz)

Vertical

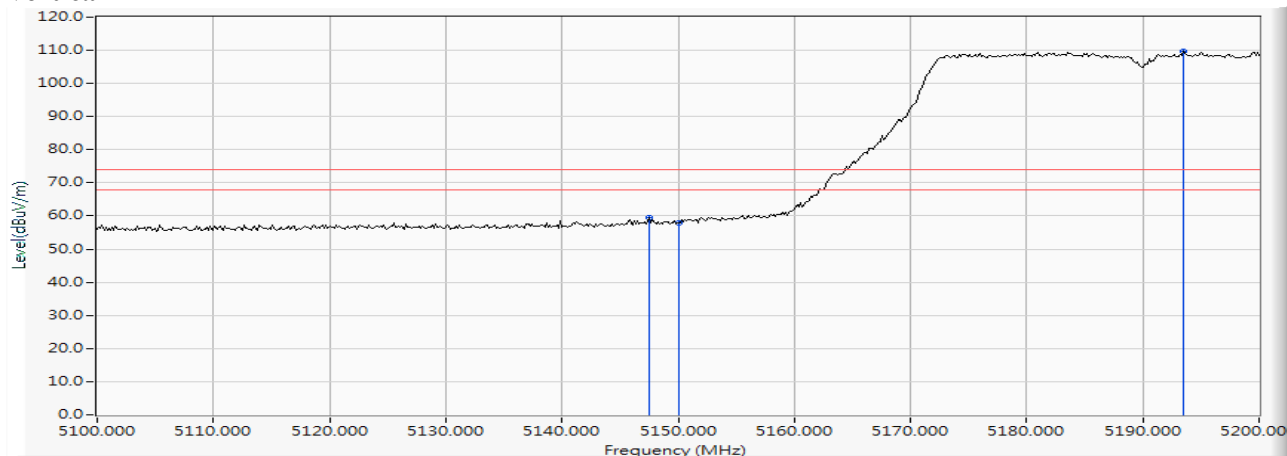


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5147.536	15.293	44.190	59.483	-14.517	74.000	PEAK
2		5150.000	15.307	42.705	58.012	-15.988	74.000	PEAK
3	*	5193.478	15.448	94.110	109.558	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 38 (5190MHz)

Vertical

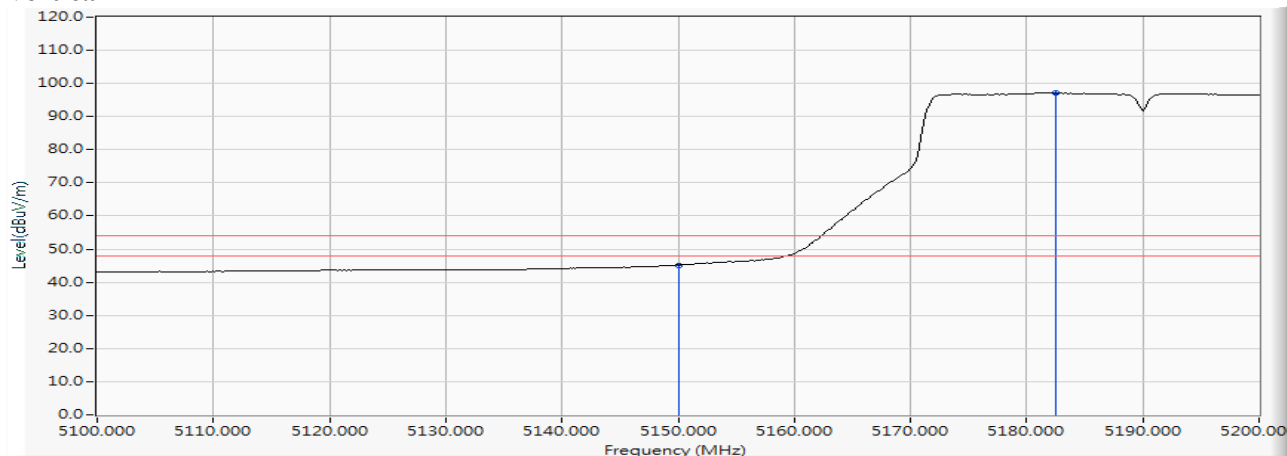


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	29.831	45.138	-8.862	54.000	AVERAGE
2	*	5182.464	15.403	81.683	97.086	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 62 (5310MHz)

Horizontal

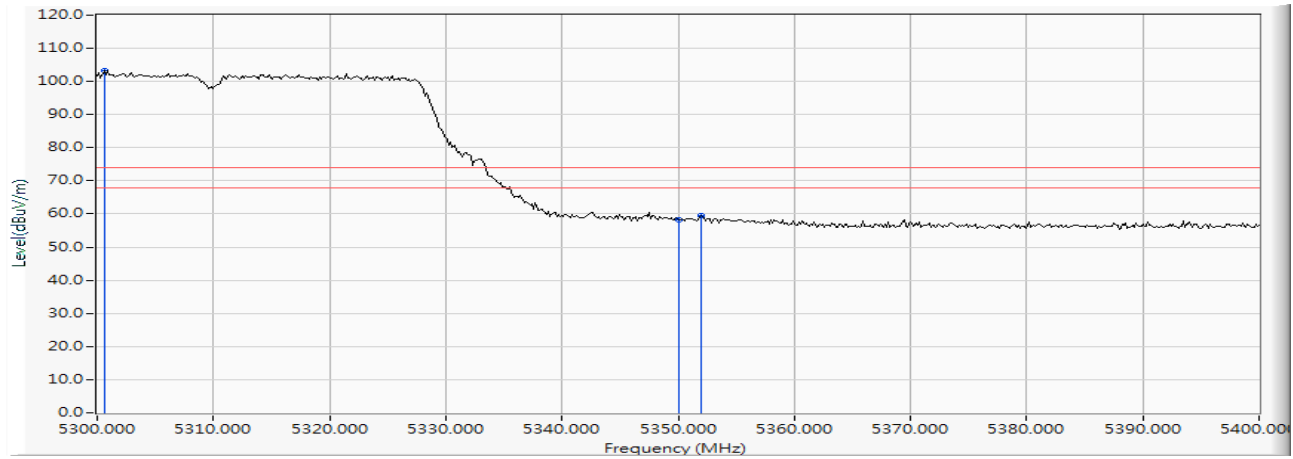


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5300.580	15.797	87.412	103.209	--	--	PEAK
2		5350.000	15.912	42.349	58.261	-15.739	74.000	PEAK
3		5352.029	15.919	43.542	59.461	-14.539	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 62 (5310MHz)

Horizontal

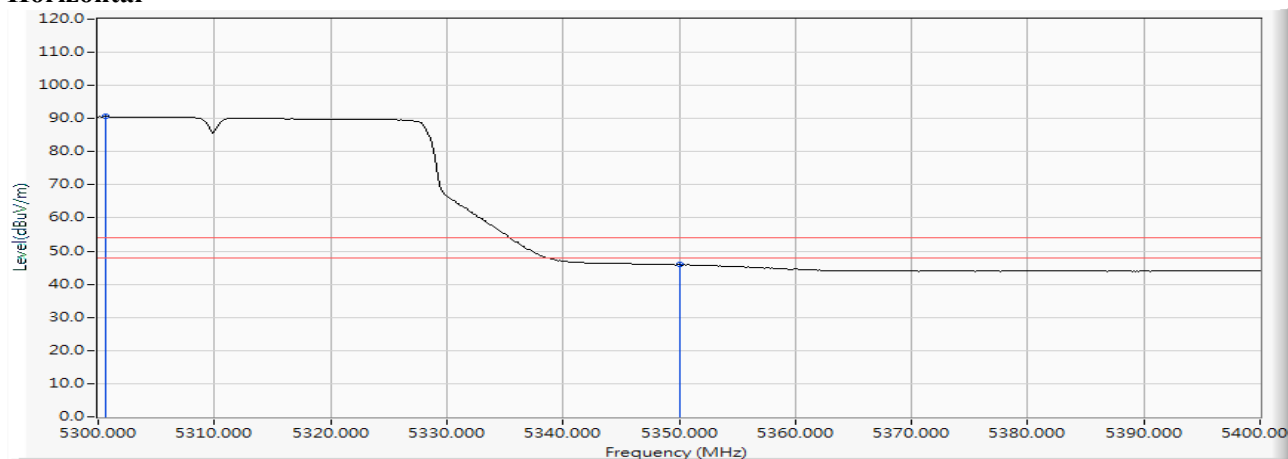


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5300.580	15.797	74.782	90.579	--	--	AVERAGE
2		5350.000	15.912	29.965	45.877	-8.123	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 62 (5310MHz)

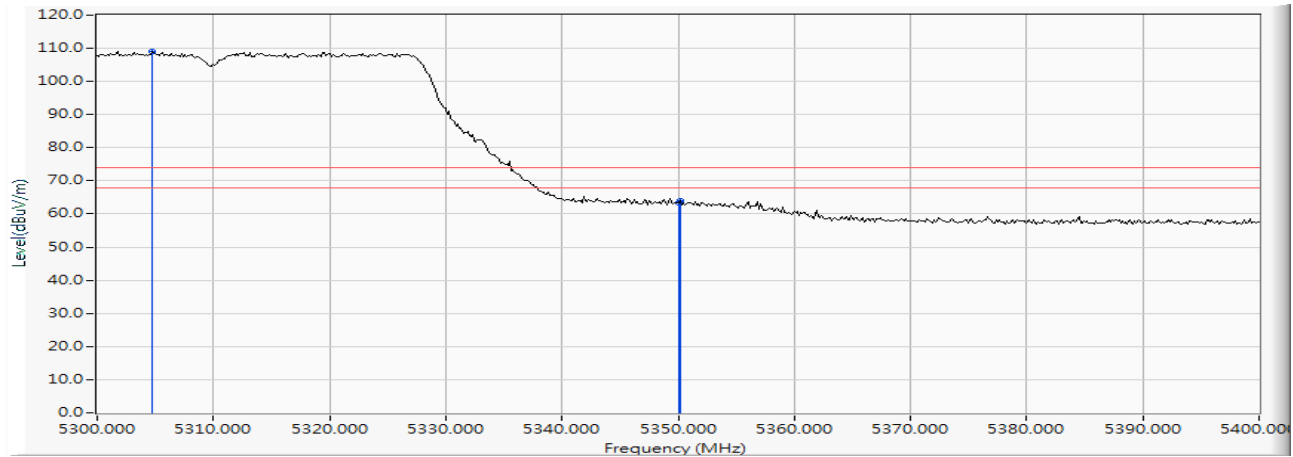
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5304.783	15.808	93.179	108.987	--	--	PEAK
2		5350.000	15.912	47.615	63.527	-10.473	74.000	PEAK
3		5350.145	15.912	47.958	63.871	-10.129	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 62 (5310MHz)

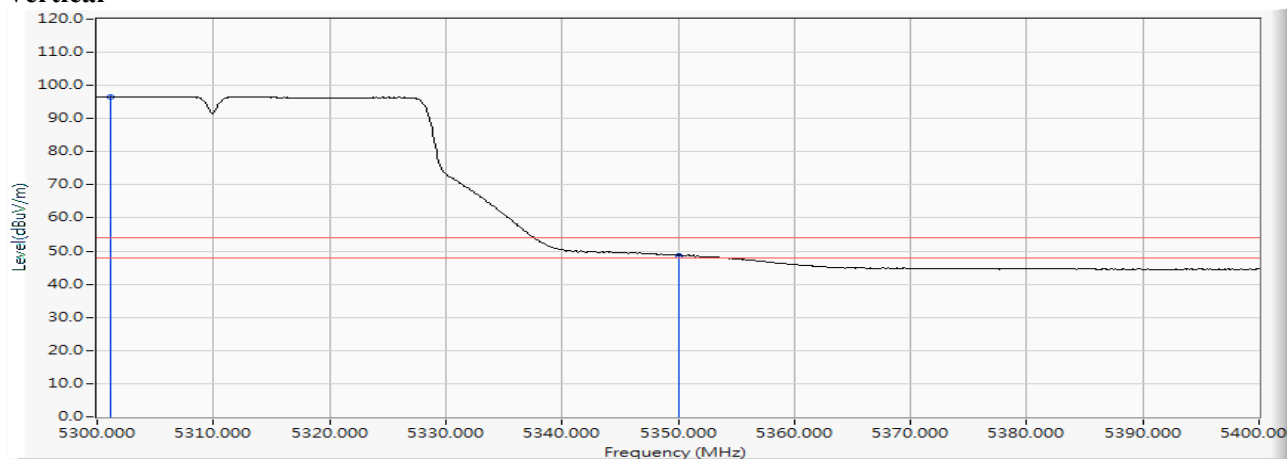Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5301.200	15.799	80.787	96.586	--	--	AVERAGE
2		5350.000	15.912	32.724	48.636	-5.364	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 102 (5510MHz)

Horizontal

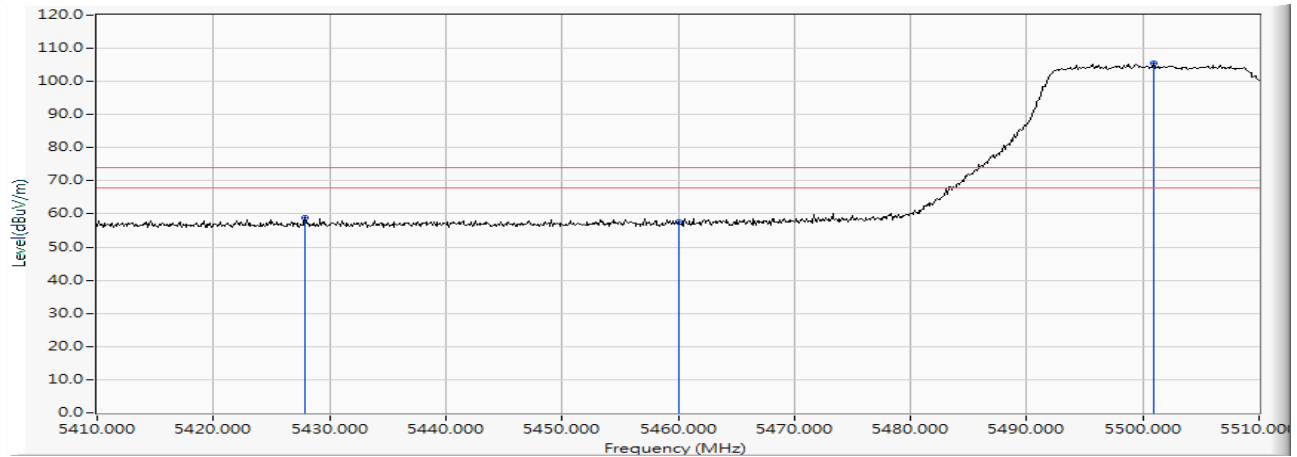


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5427.900	16.099	42.651	58.750	-15.250	74.000	PEAK
2		5460.000	16.185	41.527	57.712	-16.288	74.000	PEAK
3	*	5500.900	16.272	89.150	105.421	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 102 (5510MHz)

Horizontal

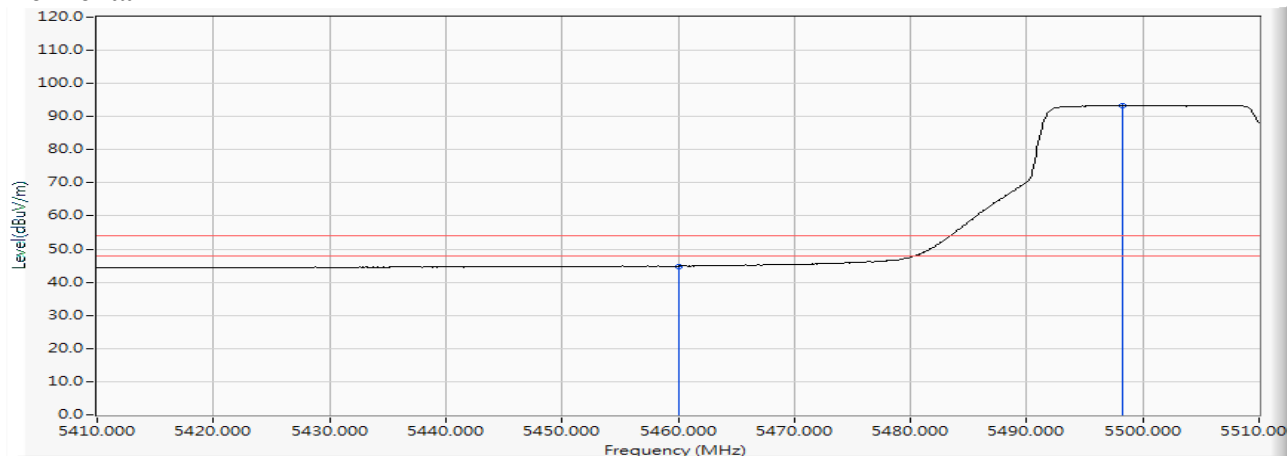


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5460.000	16.185	28.657	44.842	-9.158	54.000	AVERAGE
2	*	5498.200	16.268	77.186	93.454	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 102 (5510MHz)

Vertical

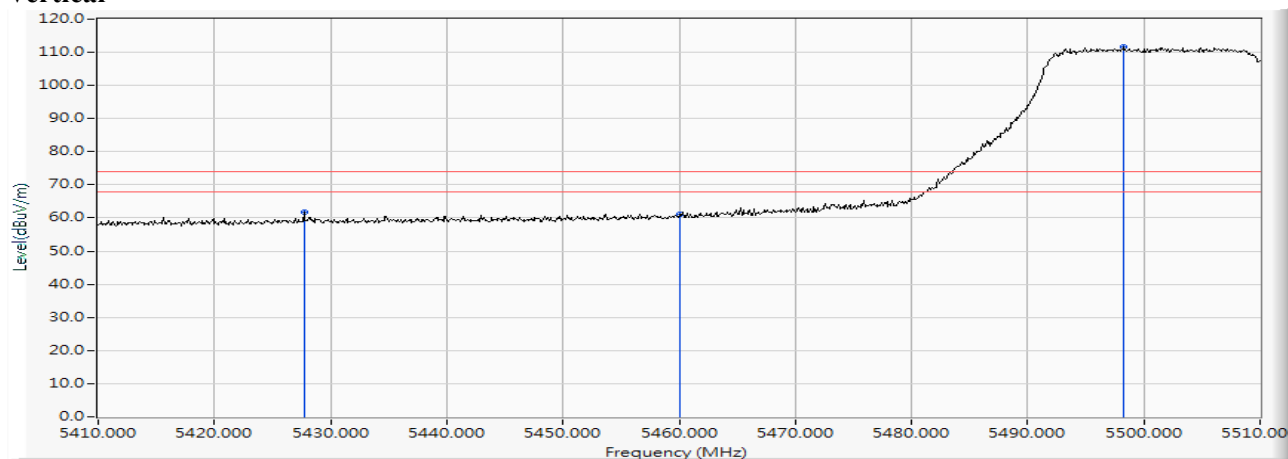


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5427.700	16.098	45.545	61.644	-12.356	74.000	PEAK
2		5460.000	16.185	44.923	61.108	-12.892	74.000	PEAK
3	*	5498.300	16.268	95.450	111.718	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 102 (5510MHz)

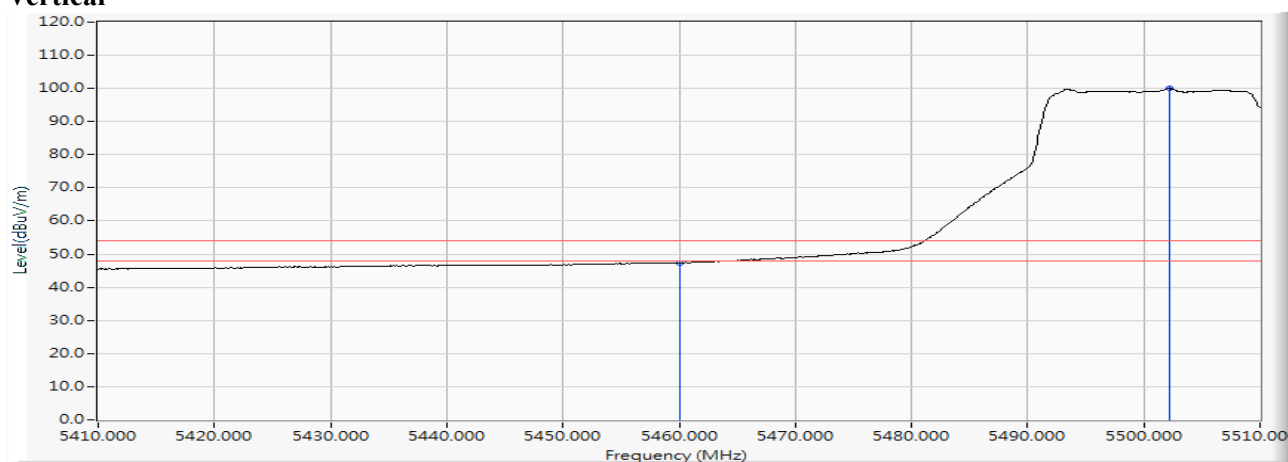Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5460.000	16.185	31.203	47.388	-6.612	54.000	AVERAGE
2	*	5502.200	16.273	83.709	99.982	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 102 (5510MHz)


Horizontal

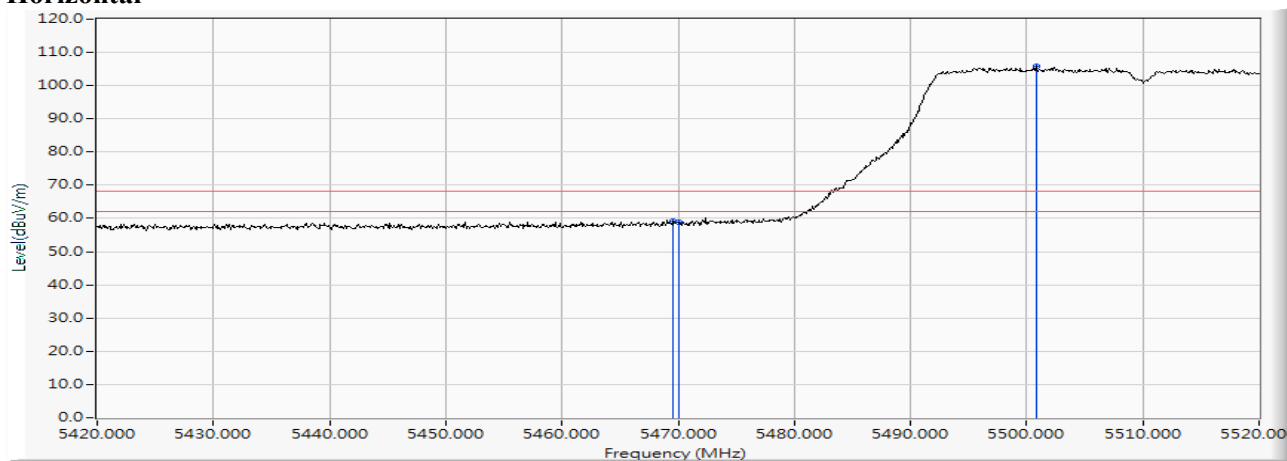

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5469.600	16.199	43.136	59.335	-8.885	68.220	PEAK
2		5470.000	16.200	42.607	58.807	-9.413	68.220	PEAK
3	*	5500.800	16.272	89.716	105.987	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 102 (5510MHz)


Vertical

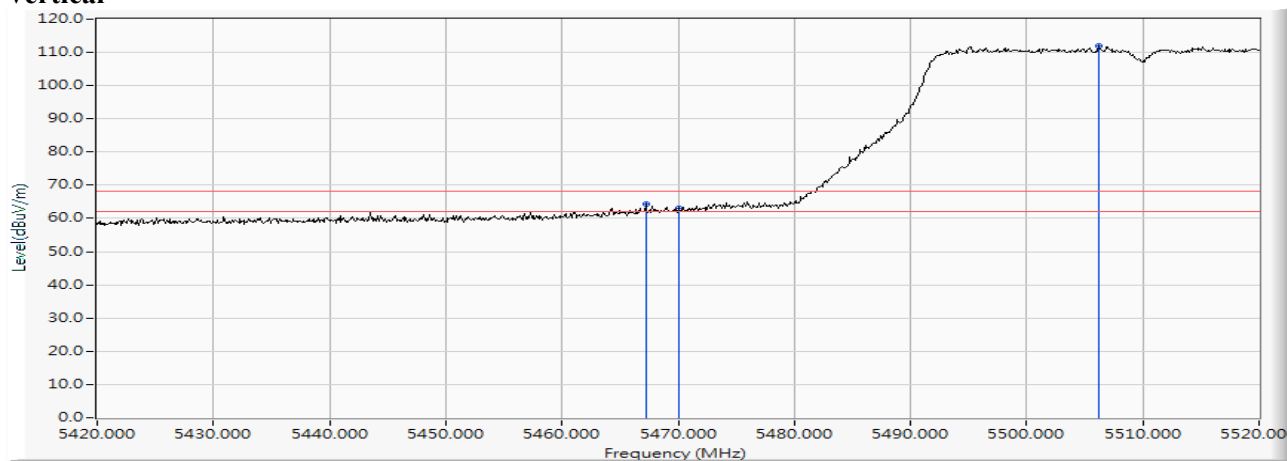

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5467.200	16.195	48.208	64.403	-3.817	68.220	PEAK
2		5470.000	16.200	46.757	62.957	-5.263	68.220	PEAK
3	*	5506.200	16.273	95.591	111.864	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 134 (5670MHz)


Horizontal

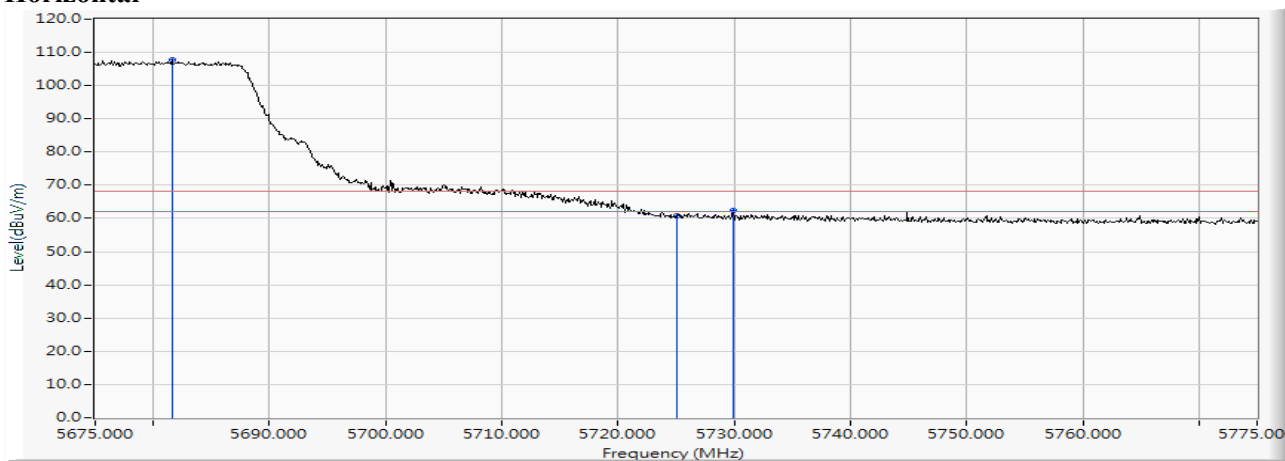

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5681.600	16.479	91.352	107.832	--	--	PEAK
2		5725.000	16.544	44.289	60.833	-7.387	68.220	PEAK
3		5729.900	16.549	45.969	62.518	-5.702	68.220	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 134 (5670MHz)


Vertical

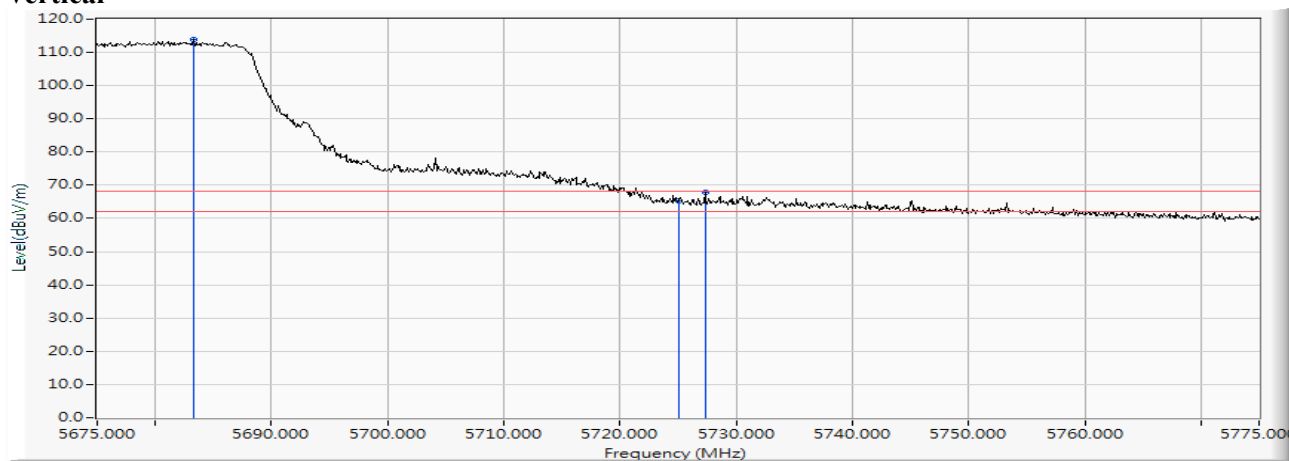

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5683.300	16.482	97.312	113.793	--	--	PEAK
2		5725.000	16.544	48.723	65.267	-2.953	68.220	PEAK
3		5727.300	16.548	51.181	67.728	-0.492	68.220	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 151 (5755MHz)


Horizontal

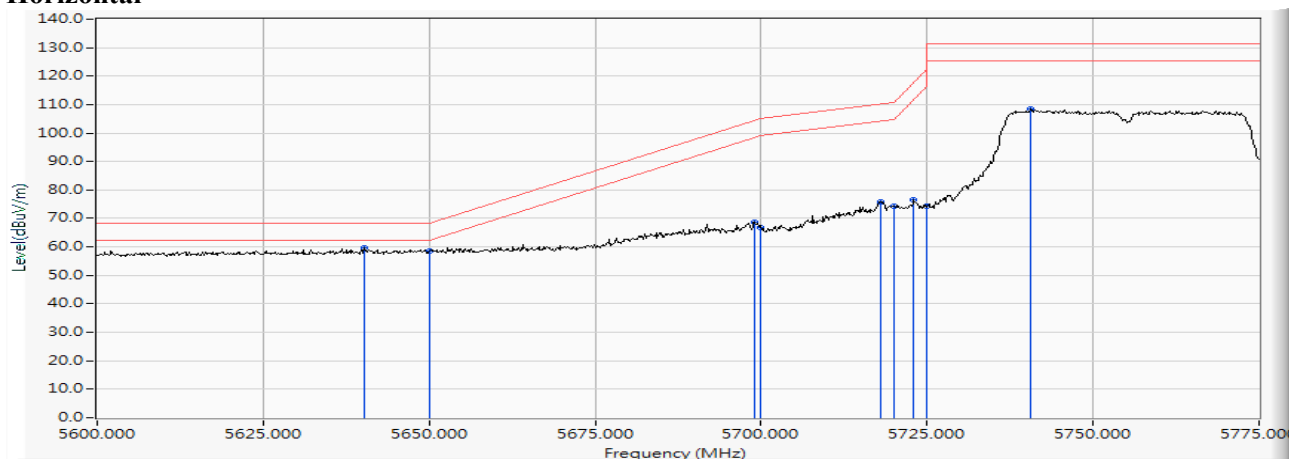

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5640.250	16.420	43.075	59.495	-8.725	68.220	PEAK
2		5650.000	16.447	42.001	58.448	-9.772	68.220	PEAK
3		5699.050	16.500	52.169	68.669	-35.828	104.497	PEAK
4		5700.000	16.502	50.439	66.941	-38.259	105.200	PEAK
5		5717.950	16.532	59.328	75.859	-34.367	110.226	PEAK
6		5720.000	16.535	57.814	74.349	-36.451	110.800	PEAK
7		5723.025	16.541	59.944	76.485	-41.212	117.697	PEAK
8		5725.000	16.544	57.716	74.260	-47.940	122.200	PEAK
9	*	5740.525	16.556	91.750	108.306	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 151 (5755MHz)


Vertical

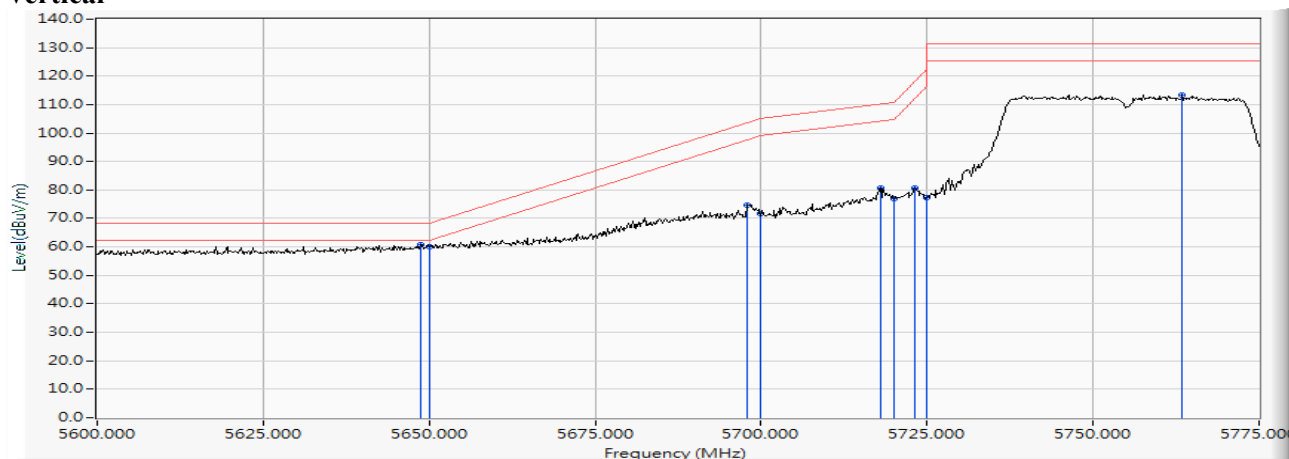

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5648.650	16.443	44.535	60.978	-7.242	68.220	PEAK
2		5650.000	16.447	43.714	60.161	-8.059	68.220	PEAK
3		5698.000	16.499	58.336	74.835	-28.886	103.721	PEAK
4		5700.000	16.502	55.253	71.755	-33.445	105.200	PEAK
5		5717.950	16.532	64.188	80.719	-29.507	110.226	PEAK
6		5720.000	16.535	60.494	77.029	-33.771	110.800	PEAK
7		5723.200	16.541	64.129	80.670	-37.426	118.096	PEAK
8		5725.000	16.544	60.929	77.473	-44.727	122.200	PEAK
9	*	5763.450	16.590	96.818	113.407	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 159 (5795MHz)


Horizontal

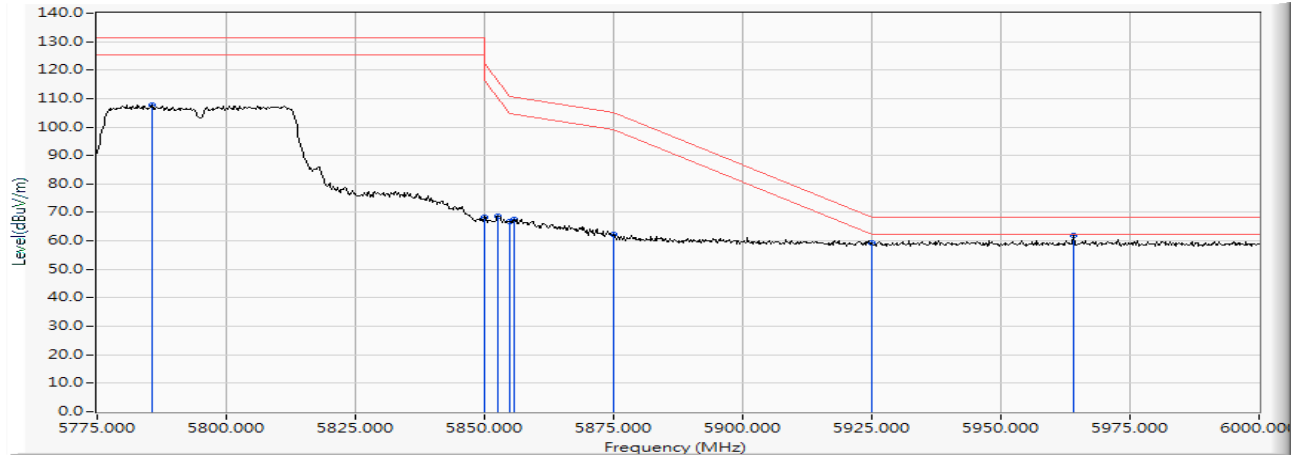

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5785.575	16.621	91.244	107.865	--	--	PEAK
2		5850.000	16.748	51.391	68.139	-54.061	122.200	PEAK
3		5852.625	16.752	52.066	68.819	-47.396	116.215	PEAK
4		5855.000	16.758	49.910	66.668	-44.132	110.800	PEAK
5		5855.775	16.761	50.689	67.449	-43.134	110.583	PEAK
6		5875.000	16.807	45.396	62.204	-42.996	105.200	PEAK
7		5875.125	16.807	45.594	62.402	-42.706	105.108	PEAK
8		5925.000	16.920	42.285	59.205	-8.995	68.200	PEAK
9		5964.000	16.982	44.927	61.910	-6.290	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 20 MIMO: Transmit (802.11n-40BW_30Mbps)-Channel 159 (5795MHz)


Vertical

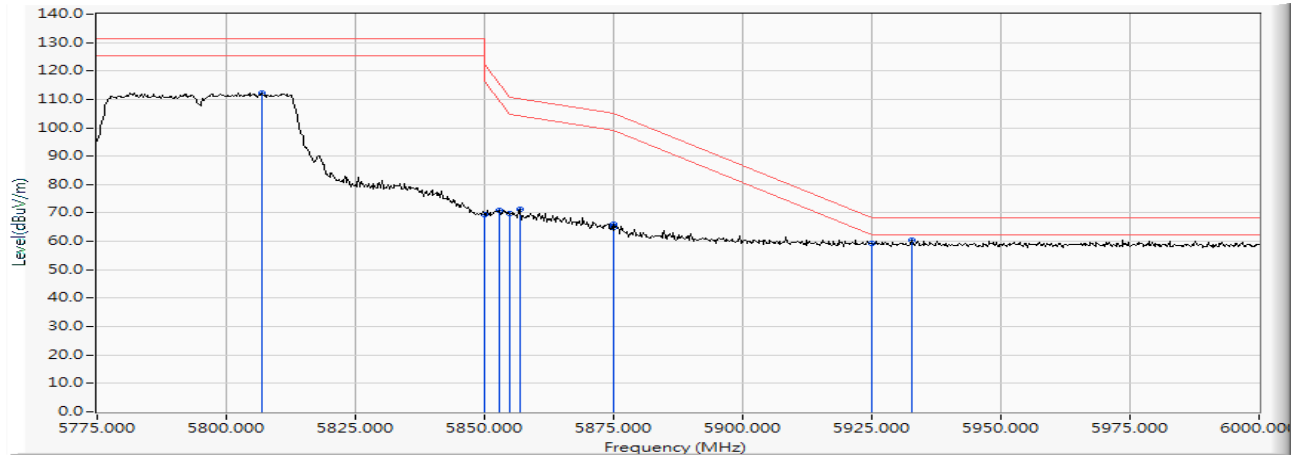

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5806.950	16.677	95.687	112.364	--	--	PEAK
2		5850.000	16.748	52.656	69.404	-52.796	122.200	PEAK
3		5852.850	16.754	54.328	71.081	-44.621	115.702	PEAK
4		5855.000	16.758	52.913	69.671	-41.129	110.800	PEAK
5		5856.900	16.763	54.442	71.205	-39.063	110.268	PEAK
6		5875.000	16.807	48.103	64.911	-40.289	105.200	PEAK
7		5875.125	16.807	49.388	66.196	-38.912	105.108	PEAK
8		5925.000	16.920	42.394	59.314	-8.886	68.200	PEAK
9		5932.725	16.928	43.506	60.434	-7.766	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 21 MIMO: Transmit (802.11ac-80BW_65Mbps)-Channel 42 (5210MHz)

Horizontal

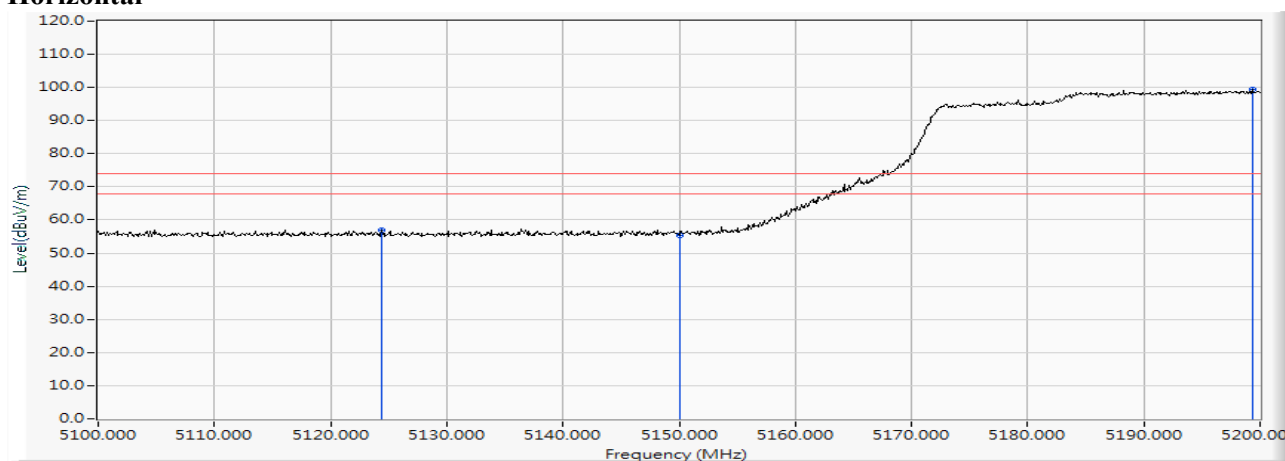


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5124.400	15.183	41.851	57.034	-16.966	74.000	PEAK
2		5150.000	15.307	40.163	55.470	-18.530	74.000	PEAK
3	*	5199.300	15.470	83.850	99.320	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 21 MIMO: Transmit (802.11ac-80BW_65Mbps)-Channel 42 (5210MHz)

Horizontal

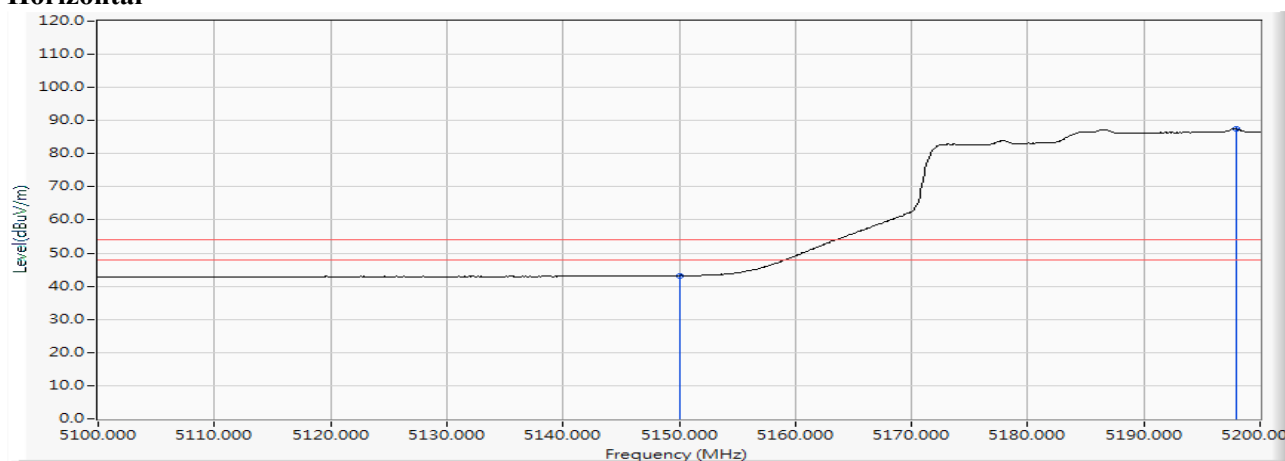


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	27.842	43.149	-10.851	54.000	AVERAGE
2	*	5197.900	15.465	72.035	87.500	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 21 MIMO: Transmit (802.11ac-80BW_65Mbps)-Channel 42 (5210MHz)

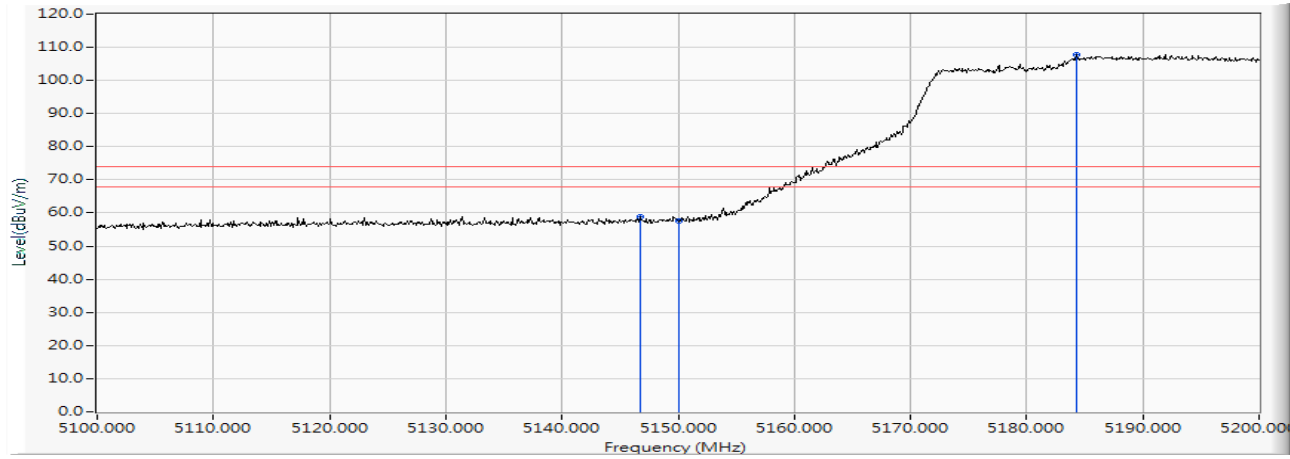
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5146.700	15.288	43.513	58.801	-15.199	74.000	PEAK
2		5150.000	15.307	42.323	57.630	-16.370	74.000	PEAK
3	*	5184.300	15.412	92.338	107.749	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 21 MIMO: Transmit (802.11ac-80BW_65Mbps)-Channel 42 (5210MHz)

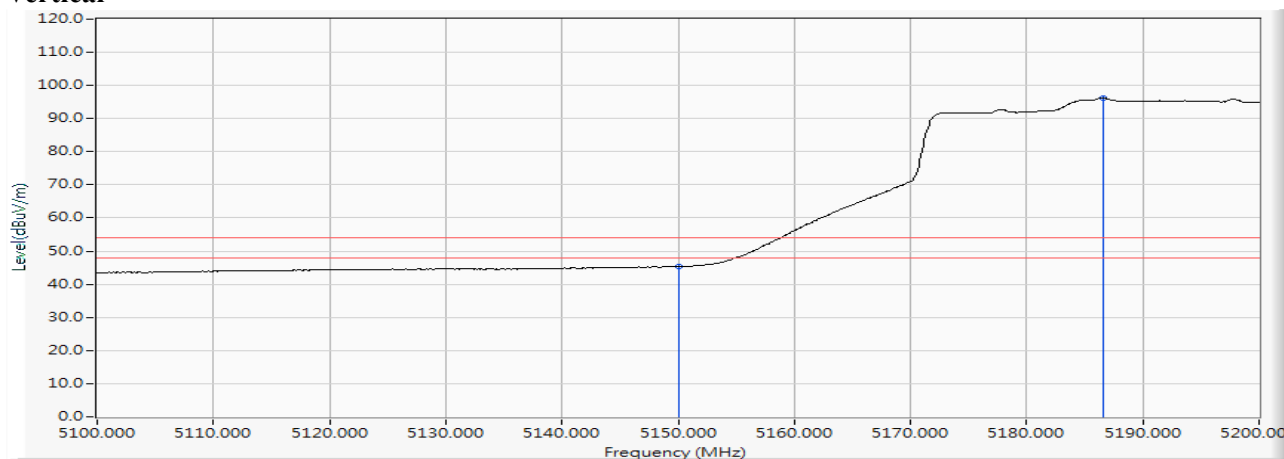Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	30.117	45.424	-8.576	54.000	AVERAGE
2	*	5186.600	15.421	80.906	96.328	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 21 MIMO: Transmit (802.11ac-80BW_65Mbps)-Channel 58 (5290MHz)

Horizontal

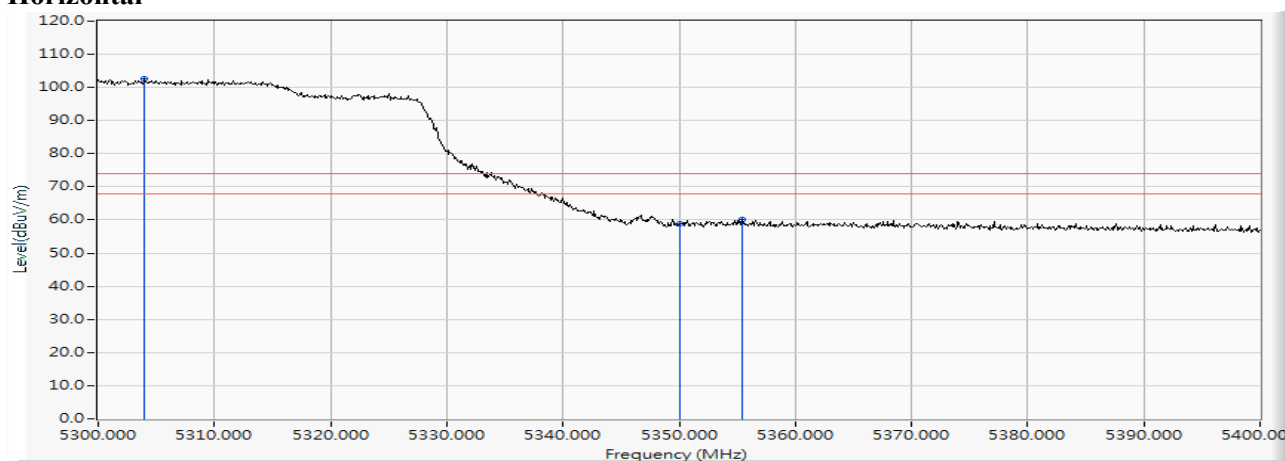


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5304.000	15.806	86.895	102.701	--	--	PEAK
2		5350.000	15.912	43.088	59.000	-15.000	74.000	PEAK
3		5355.400	15.929	44.082	60.011	-13.989	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 21 MIMO: Transmit (802.11ac-80BW_65Mbps)-Channel 58 (5290MHz)

Horizontal

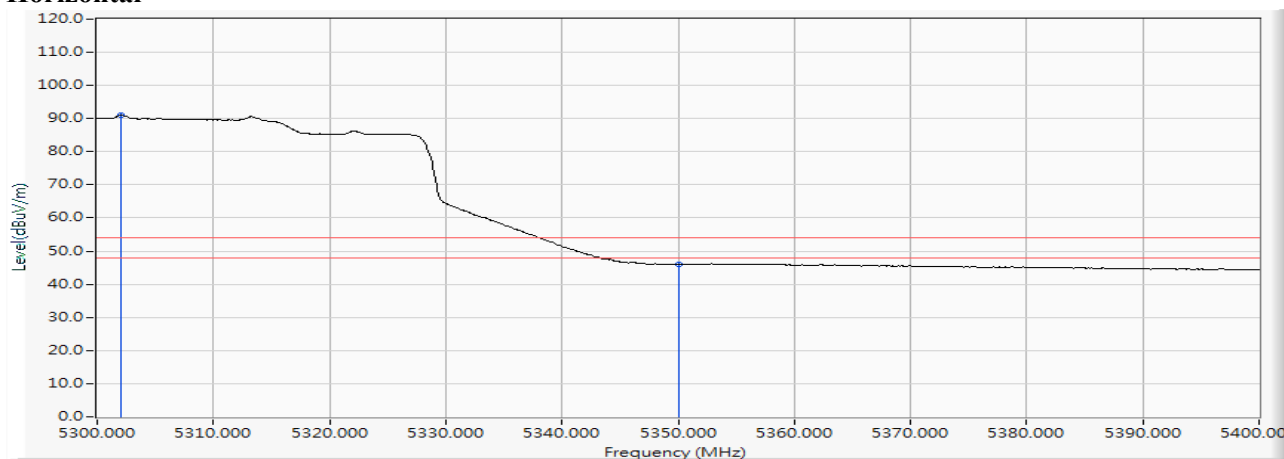


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5302.100	15.801	75.297	91.098	--	--	AVERAGE
2		5350.000	15.912	29.991	45.903	-8.097	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 21 MIMO: Transmit (802.11ac-80BW_65Mbps)-Channel 58 (5290MHz)

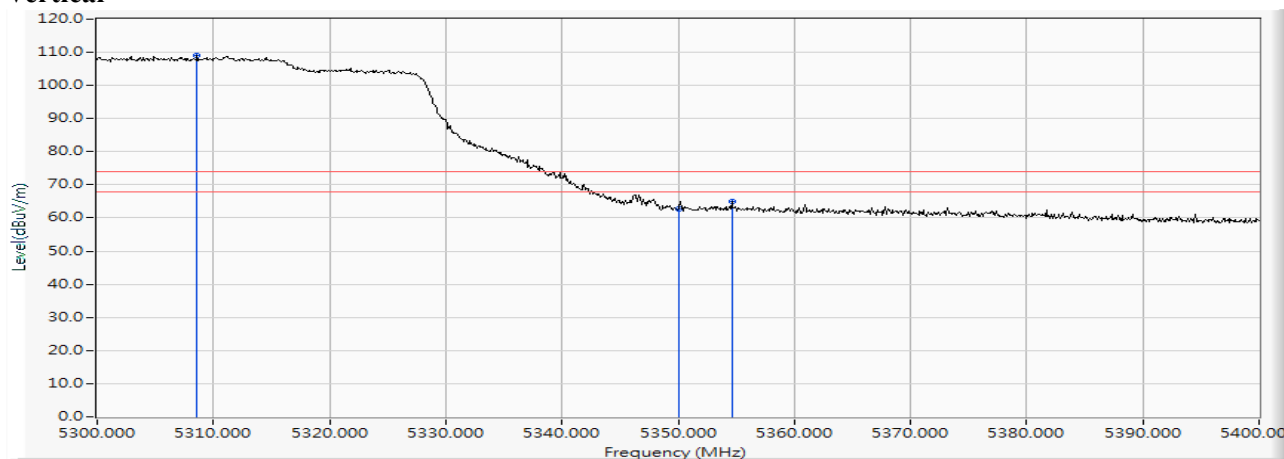
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5308.600	15.817	93.253	109.070	--	--	PEAK
2		5350.000	15.912	46.861	62.773	-11.227	74.000	PEAK
3		5354.600	15.927	49.050	64.977	-9.023	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 21 MIMO: Transmit (802.11ac-80BW_65Mbps)-Channel 58 (5290MHz)

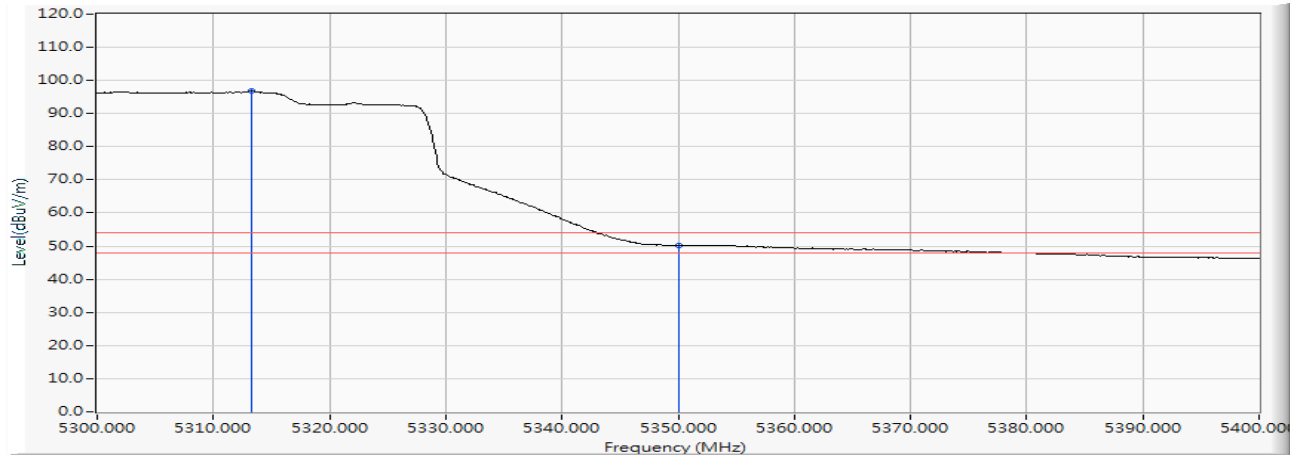Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5313.300	15.829	80.972	96.800	--	--	AVERAGE
2		5350.000	15.912	34.350	50.262	-3.738	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 21 MIMO: Transmit (802.11ac-80BW_65Mbps)-Channel 106 (5530MHz)

Horizontal

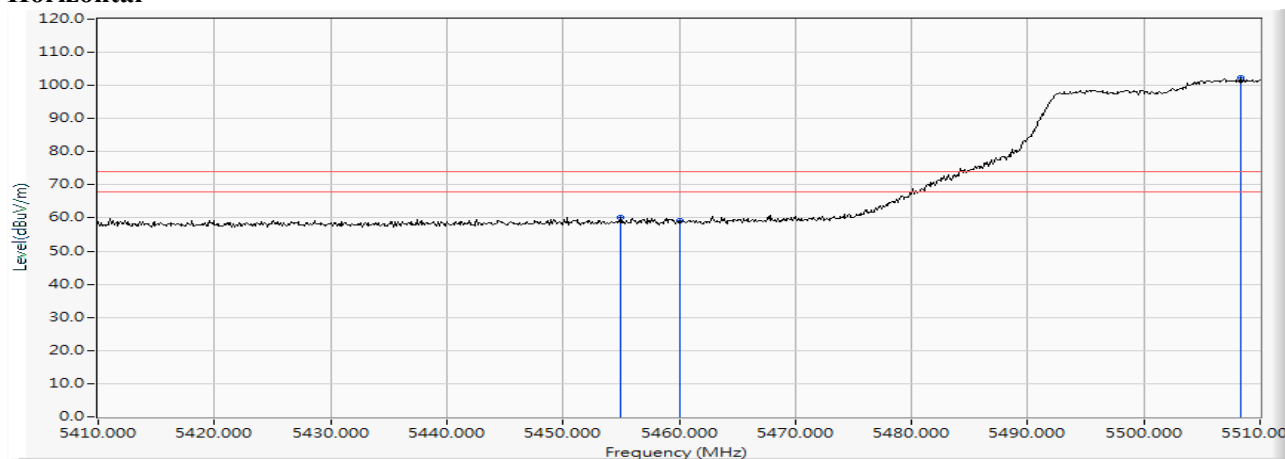


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5455.000	16.174	44.080	60.254	-13.746	74.000	PEAK
2		5460.000	16.185	42.996	59.181	-14.819	74.000	PEAK
3	*	5508.300	16.275	85.930	102.204	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 21 MIMO: Transmit (802.11ac-80BW_65Mbps)-Channel 106 (5530MHz)

Horizontal

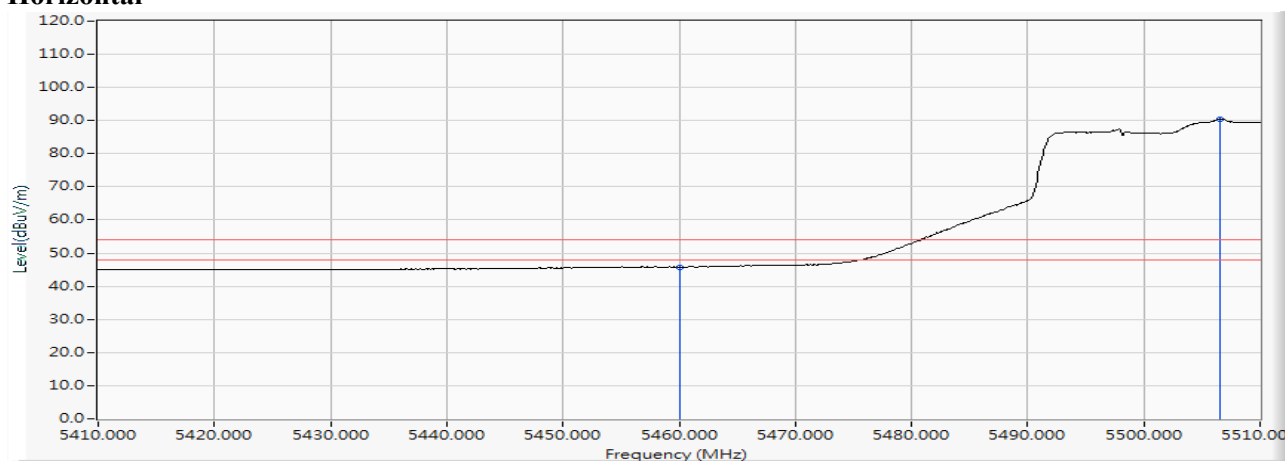


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5460.000	16.185	29.547	45.732	-8.268	54.000	AVERAGE
2	*	5506.600	16.273	74.283	90.556	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 21 MIMO: Transmit (802.11ac-80BW_65Mbps)-Channel 106 (5530MHz)

Vertical

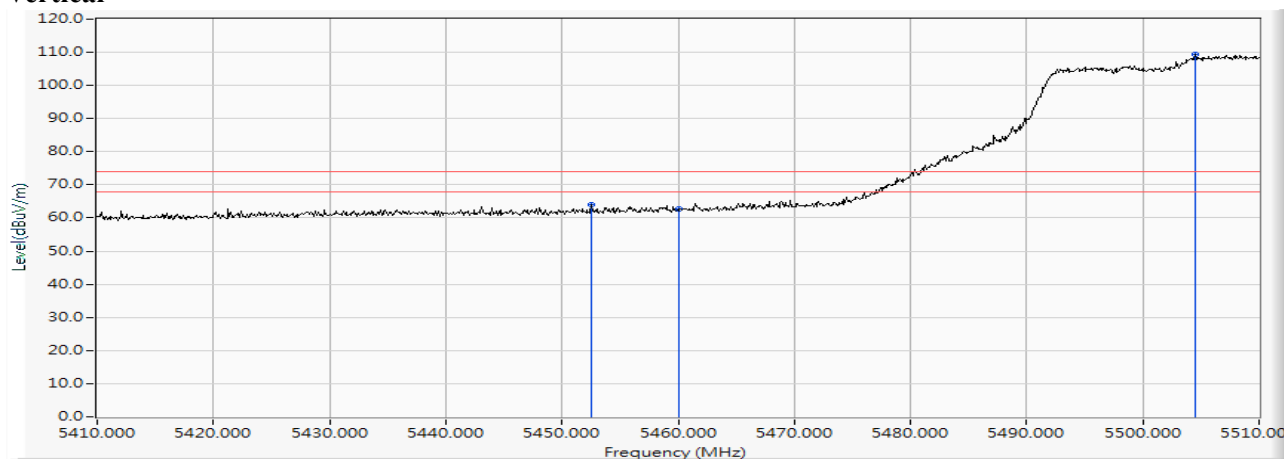


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5452.500	16.165	47.754	63.919	-10.081	74.000	PEAK
2		5460.000	16.185	46.413	62.598	-11.402	74.000	PEAK
3	*	5504.500	16.273	93.027	109.300	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 21 MIMO: Transmit (802.11ac-80BW_65Mbps)-Channel 106 (5530MHz)

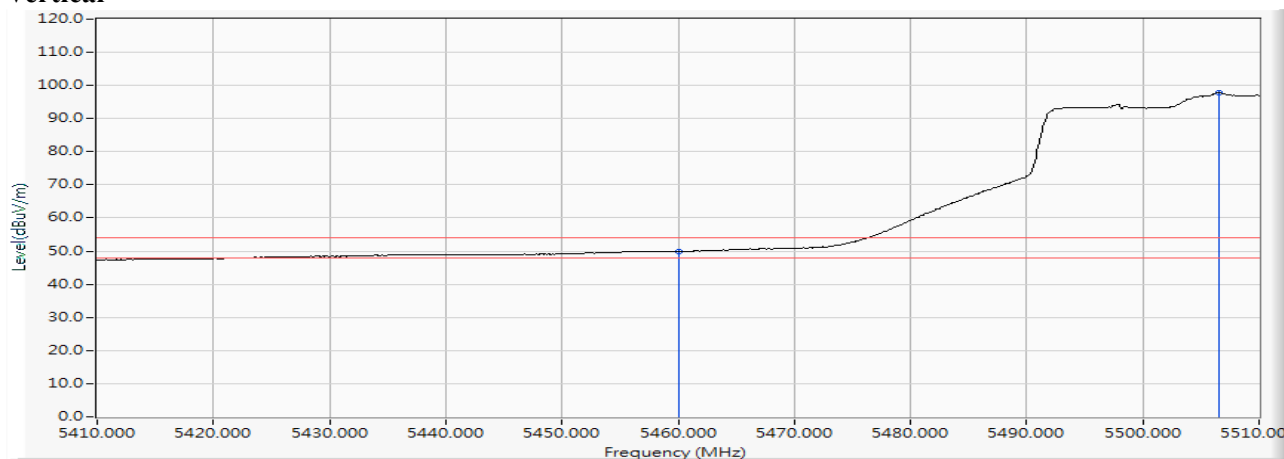Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5460.000	16.185	33.696	49.881	-4.119	54.000	AVERAGE
2	*	5506.500	16.273	81.459	97.732	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 21 MIMO: Transmit (802.11ac-80BW_65Mbps)-Channel 106 (5530MHz)

Horizontal

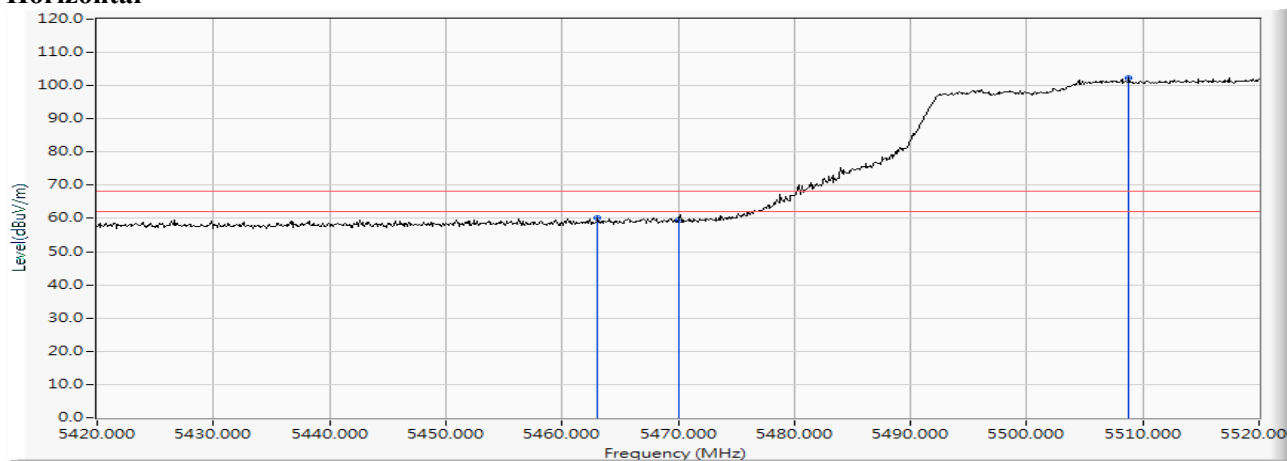

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5463.100	16.189	43.863	60.052	-8.168	68.220	PEAK
2		5470.000	16.200	43.286	59.486	-8.734	68.220	PEAK
3	*	5508.800	16.273	86.046	102.320	--	--	PEAK


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 21 MIMO: Transmit (802.11ac-80BW_65Mbps)-Channel 106 (5530MHz)

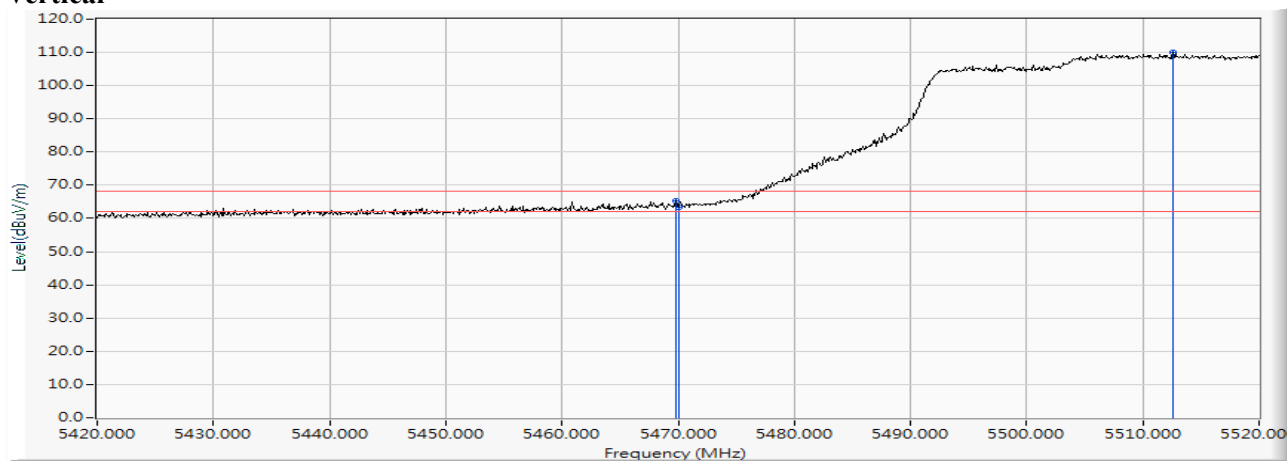Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5469.800	16.200	48.975	65.174	-3.046	68.220	PEAK
2		5470.000	16.200	47.237	63.437	-4.783	68.220	PEAK
3	*	5512.600	16.279	93.641	109.920	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 21 MIMO: Transmit (802.11ac-80BW_65Mbps)-Channel 155 (5775MHz)


Horizontal

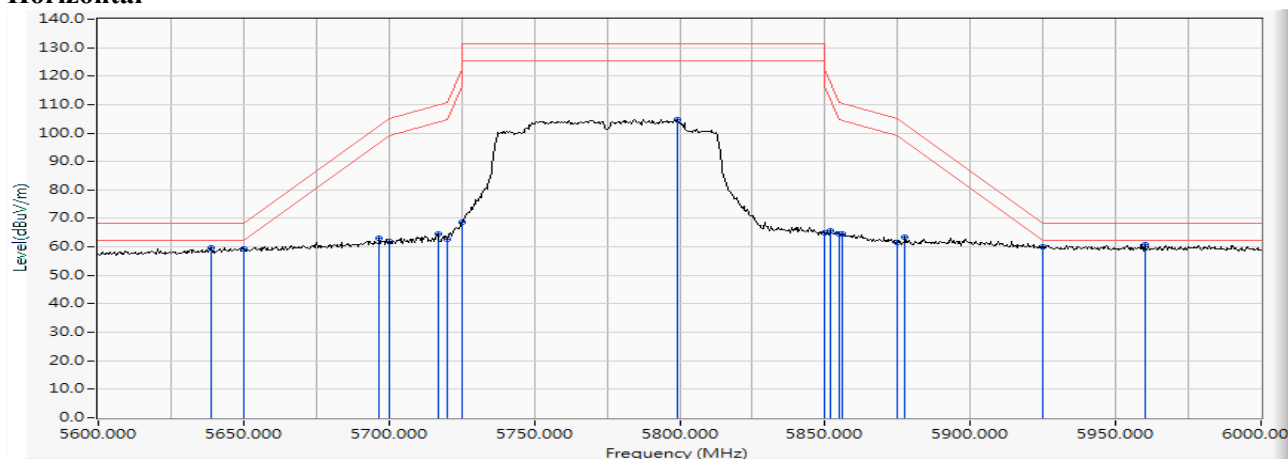

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5638.800	16.415	43.173	59.589	-8.631	68.220	PEAK
2		5650.000	16.447	43.037	59.484	-8.736	68.220	PEAK
3		5696.800	16.497	46.602	63.100	-39.733	102.833	PEAK
4		5700.000	16.502	45.446	61.948	-43.252	105.200	PEAK
5		5716.800	16.528	48.186	64.715	-45.189	109.904	PEAK
6		5720.000	16.535	46.220	62.755	-48.045	110.800	PEAK
7		5725.000	16.544	52.024	68.568	-53.632	122.200	PEAK
8	*	5799.200	16.657	88.231	104.889	--	--	PEAK
9		5850.000	16.748	48.185	64.933	-57.267	122.200	PEAK
10		5852.000	16.751	48.880	65.631	-52.009	117.640	PEAK
11		5855.000	16.758	47.829	64.587	-46.213	110.800	PEAK
12		5856.000	16.761	47.840	64.601	-45.919	110.520	PEAK
13		5875.000	16.807	44.815	61.623	-43.577	105.200	PEAK
14		5877.600	16.815	46.548	63.363	-39.913	103.276	PEAK
15		5925.000	16.920	43.022	59.942	-8.258	68.200	PEAK
16		5960.000	16.973	43.918	60.891	-7.309	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 21 MIMO: Transmit (802.11ac-80BW_65Mbps)-Channel 155 (5775MHz)


Vertical

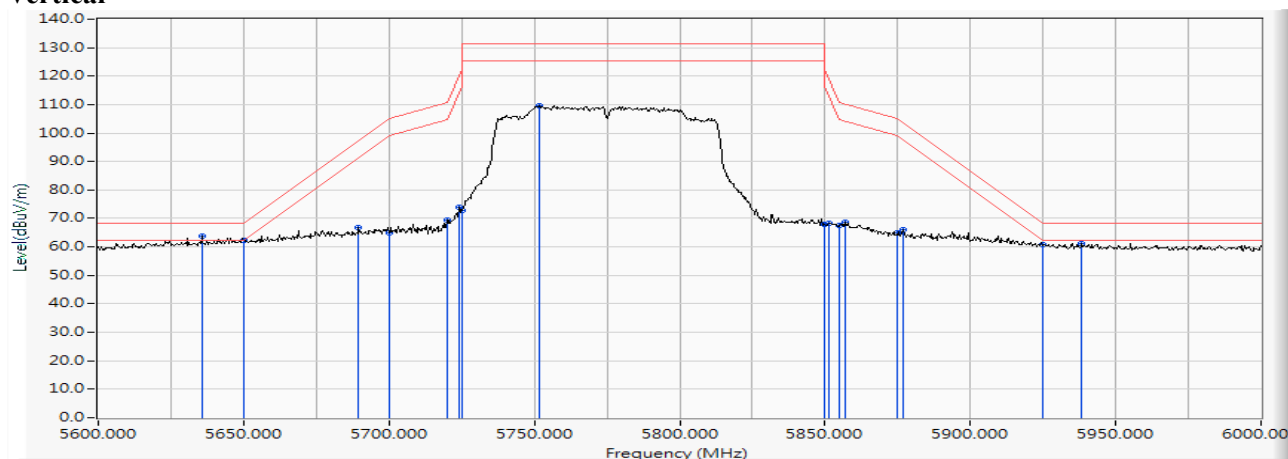

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5635.600	16.411	47.502	63.912	-4.308	68.220	PEAK
2		5650.000	16.447	45.814	62.261	-5.959	68.220	PEAK
3		5689.600	16.488	50.344	66.833	-30.675	97.508	PEAK
4		5700.000	16.502	48.367	64.869	-40.331	105.200	PEAK
5		5720.000	16.535	52.740	69.275	-41.525	110.800	PEAK
6		5724.000	16.543	57.245	73.787	-46.133	119.920	PEAK
7		5725.000	16.544	56.146	72.690	-49.510	122.200	PEAK
8	*	5751.600	16.570	92.989	109.559	--	--	PEAK
9		5850.000	16.748	51.060	67.808	-54.392	122.200	PEAK
10		5851.200	16.750	51.421	68.171	-51.293	119.464	PEAK
11		5855.000	16.758	50.812	67.570	-43.230	110.800	PEAK
12		5856.800	16.763	51.857	68.620	-41.676	110.296	PEAK
13		5875.000	16.807	47.952	64.760	-40.440	105.200	PEAK
14		5876.800	16.813	49.233	66.046	-37.822	103.868	PEAK
15		5925.000	16.920	43.805	60.725	-7.475	68.200	PEAK
16		5938.400	16.935	44.207	61.141	-7.059	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 22 MIMO: Transmit (802.11ac-160BW_130Mbps)-Channel 50 (5250MHz)

Horizontal

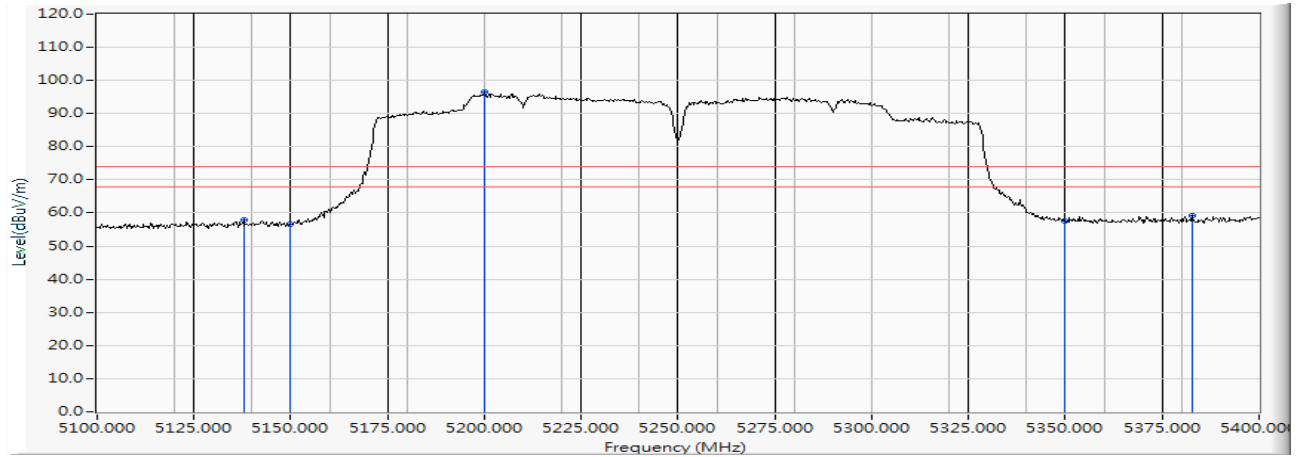


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5137.800	15.238	42.829	58.067	-15.933	74.000	PEAK
2		5150.000	15.307	41.272	56.579	-17.421	74.000	PEAK
3	*	5199.900	15.472	80.889	96.362	--	--	PEAK
4		5350.000	15.912	41.802	57.714	-16.286	74.000	PEAK
5		5382.600	16.006	43.226	59.233	-14.767	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 22 MIMO: Transmit (802.11ac-160BW_130Mbps)-Channel 50 (5250MHz)

Horizontal

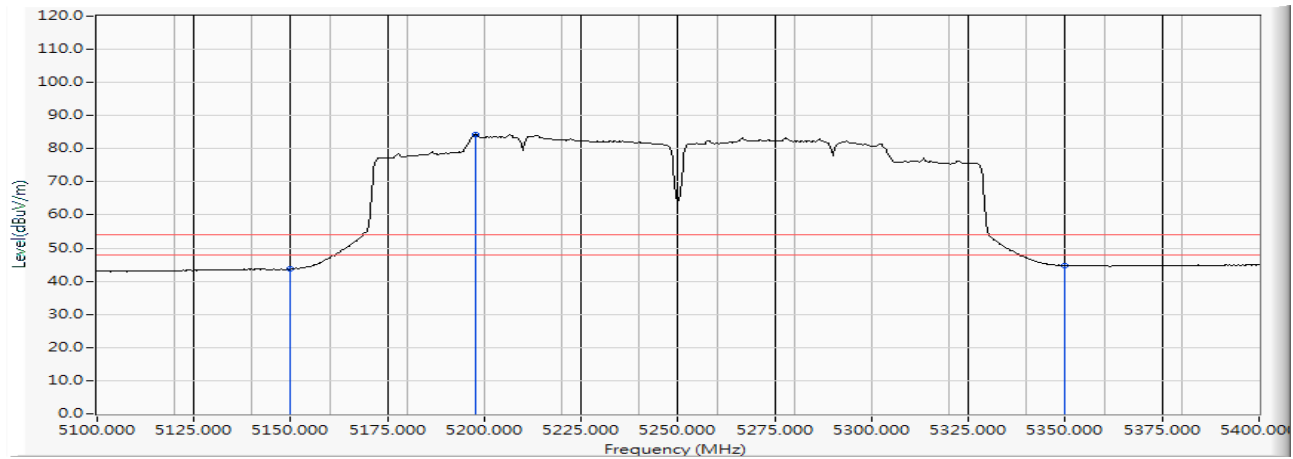


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	28.291	43.598	-10.402	54.000	AVERAGE
2	*	5197.800	15.465	68.842	84.306	--	--	AVERAGE
3		5350.000	15.912	28.807	44.719	-9.281	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 22 MIMO: Transmit (802.11ac-160BW_130Mbps)-Channel 50 (5250MHz)

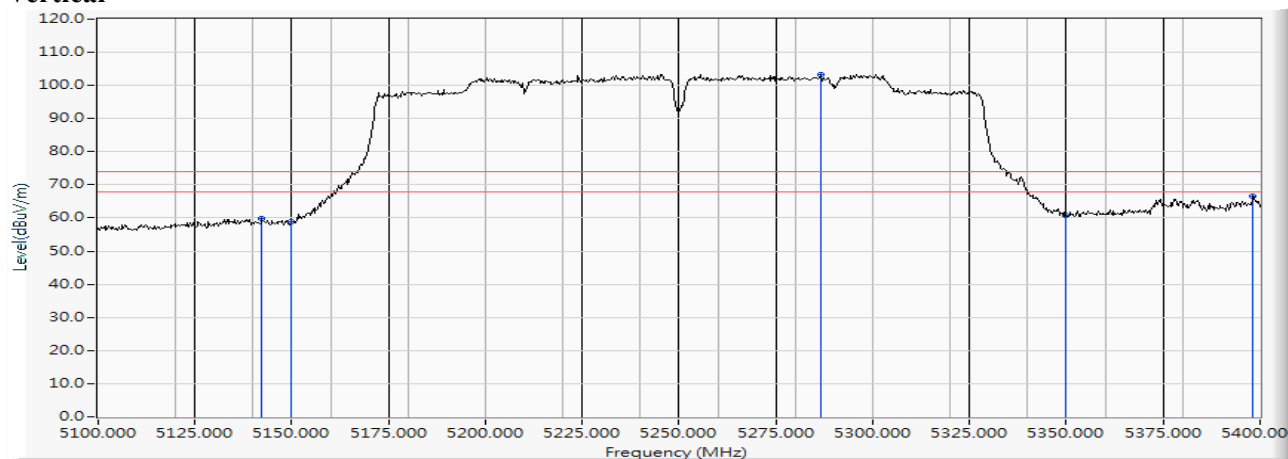
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5142.300	15.264	44.623	59.886	-14.114	74.000	PEAK
2		5150.000	15.307	43.492	58.799	-15.201	74.000	PEAK
3	*	5286.600	15.763	87.663	103.426	--	--	PEAK
4		5350.000	15.912	45.042	60.954	-13.046	74.000	PEAK
5		5398.200	16.026	50.599	66.625	-7.375	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 22 MIMO: Transmit (802.11ac-160BW_130Mbps)-Channel 50 (5250MHz)

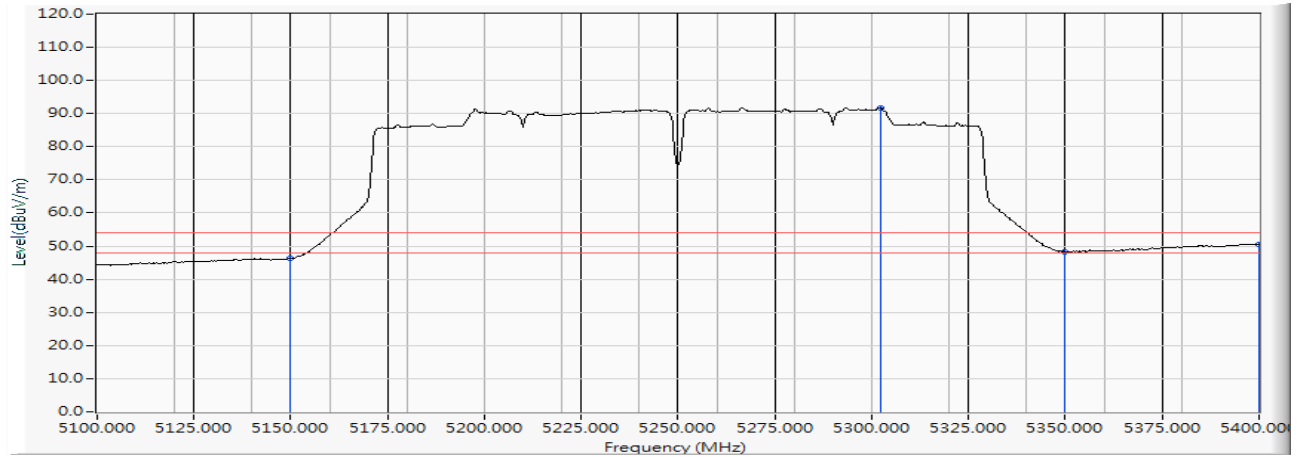Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	30.955	46.262	-7.738	54.000	AVERAGE
2	*	5302.200	15.801	75.960	91.762	--	--	AVERAGE
3		5350.000	15.912	32.290	48.202	-5.798	54.000	AVERAGE
4		5400.000	16.028	34.611	50.639	-3.361	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 22 MIMO: Transmit (802.11ac-160BW_130Mbps)-Channel 114 (5570MHz)

Horizontal

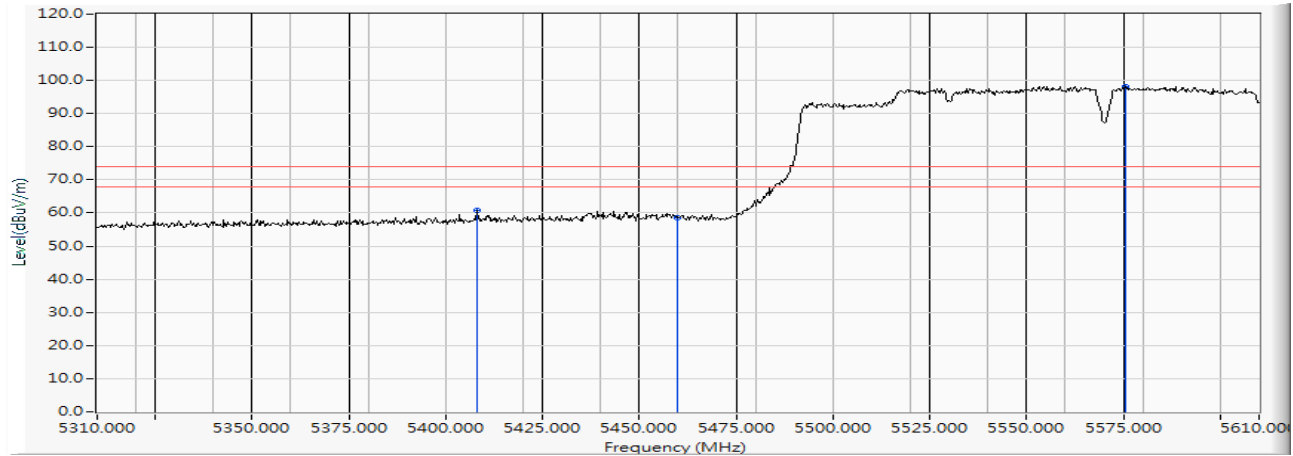


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5408.100	16.047	44.735	60.782	-13.218	74.000	PEAK
2		5460.000	16.185	42.433	58.618	-15.382	74.000	PEAK
3	*	5575.500	16.352	81.813	98.165	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 22 MIMO: Transmit (802.11ac-160BW_130Mbps)-Channel 114 (5570MHz)

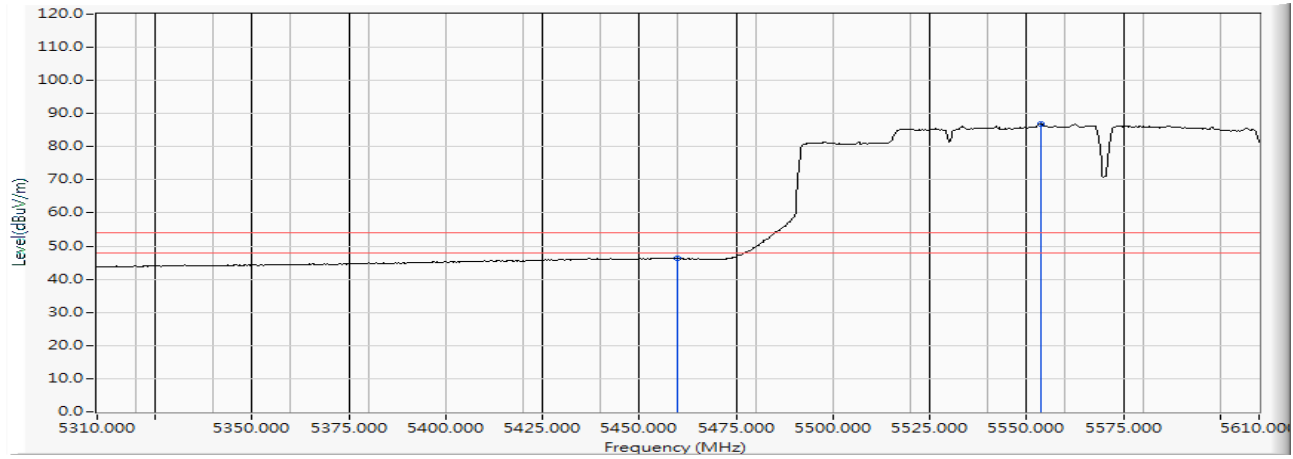
Horizontal

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5460.000	16.185	30.110	46.295	-7.705	54.000	AVERAGE
2	*	5553.600	16.325	70.651	86.976	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 22 MIMO: Transmit (802.11ac-160BW_130Mbps)-Channel 114 (5570MHz)

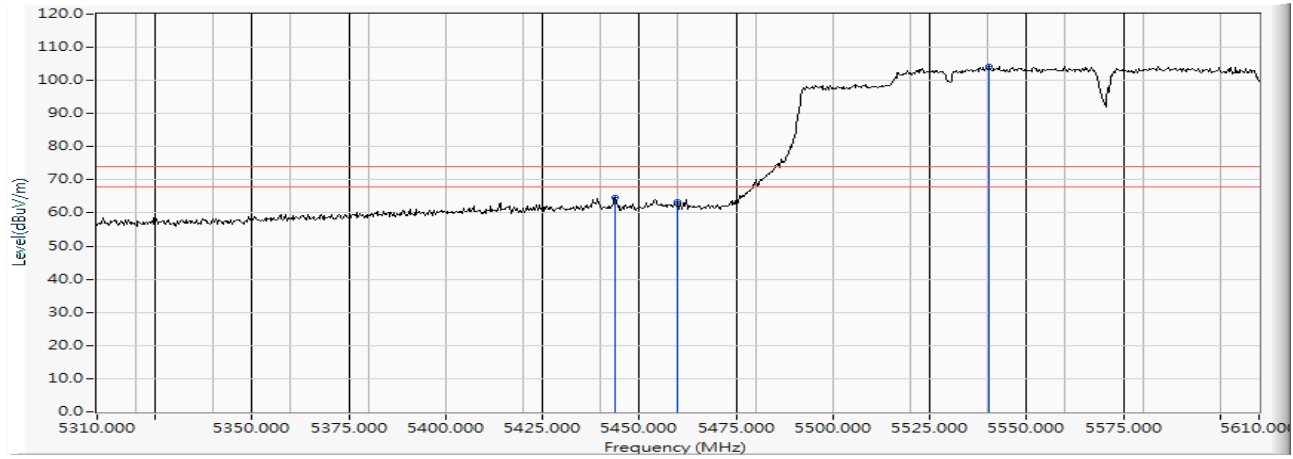
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5443.800	16.137	48.606	64.743	-9.257	74.000	PEAK
2		5460.000	16.185	47.193	63.378	-10.622	74.000	PEAK
3	*	5540.400	16.319	88.074	104.393	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 22 MIMO: Transmit (802.11ac-160BW_130Mbps)-Channel 114 (5570MHz)

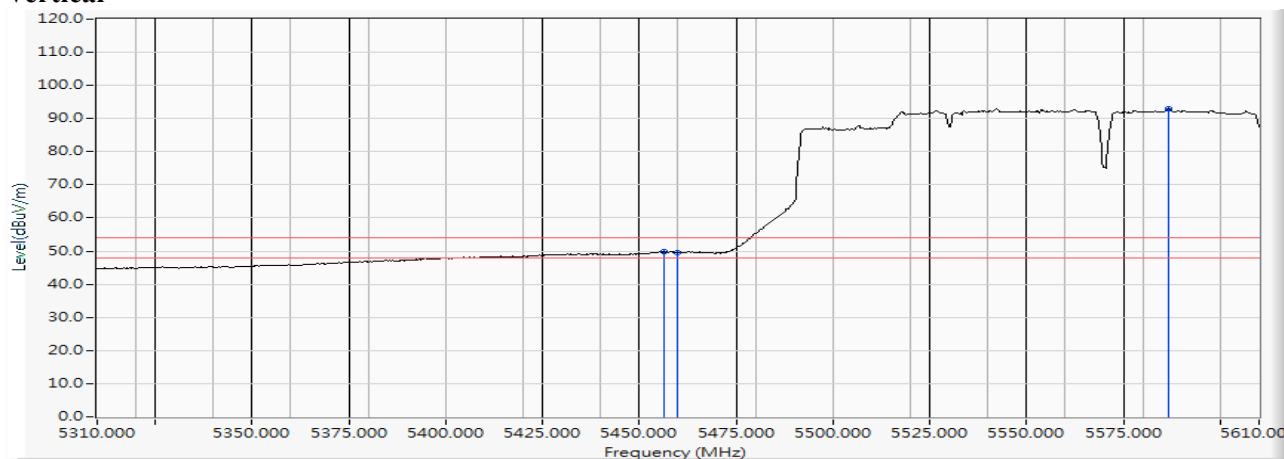Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5456.400	16.178	33.660	49.838	-4.162	54.000	AVERAGE
2		5460.000	16.185	33.402	49.587	-4.413	54.000	AVERAGE
3	*	5586.600	16.372	76.521	92.894	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 22 MIMO: Transmit (802.11ac-160BW_130Mbps)-Channel 114 (5570MHz)


Horizontal

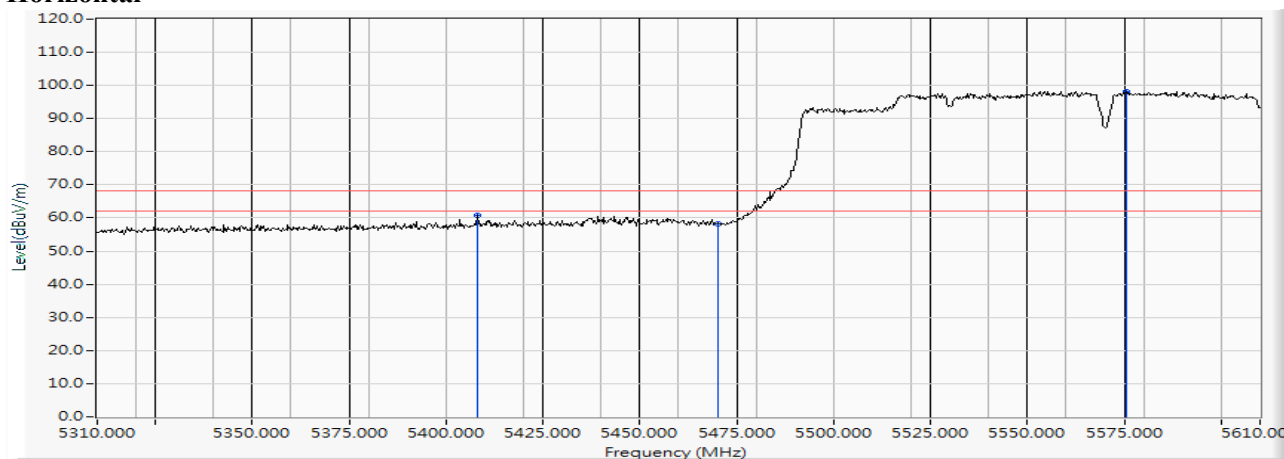

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5408.100	16.047	44.735	60.782	-7.438	68.220	PEAK
2		5470.000	16.200	42.045	58.245	-9.975	68.220	PEAK
3	*	5575.500	16.352	81.813	98.165	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 22 MIMO: Transmit (802.11ac-160BW_130Mbps)-Channel 114 (5570MHz)


Vertical

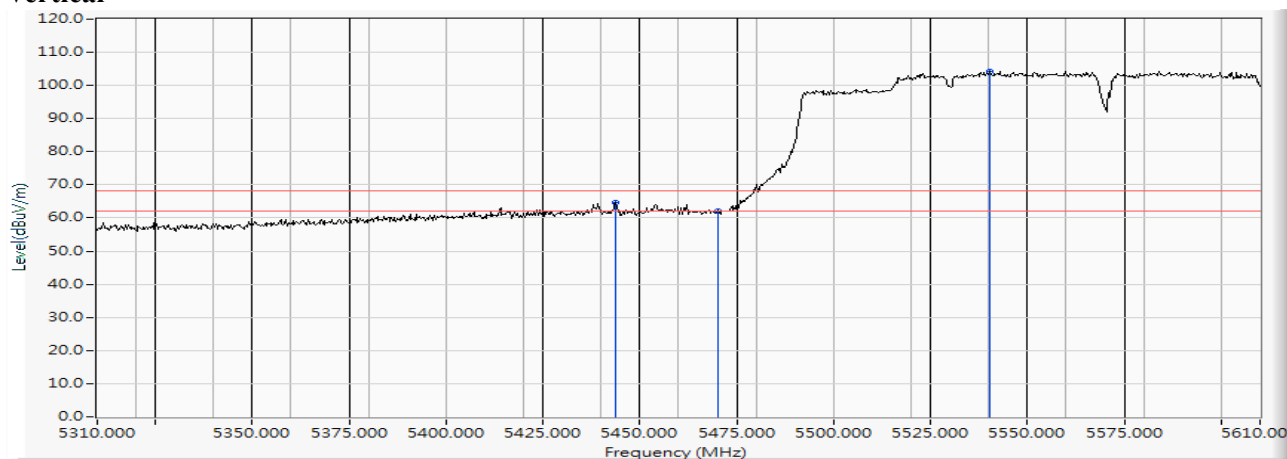

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5443.800	16.137	48.606	64.743	-3.477	68.220	PEAK
2		5470.000	16.200	45.784	61.984	-6.236	68.220	PEAK
3	*	5540.400	16.319	88.074	104.393	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 6: SISO A: Transmit (802.11ax-20BW_8.6Mbps)-Channel 36 (5180MHz)

Horizontal

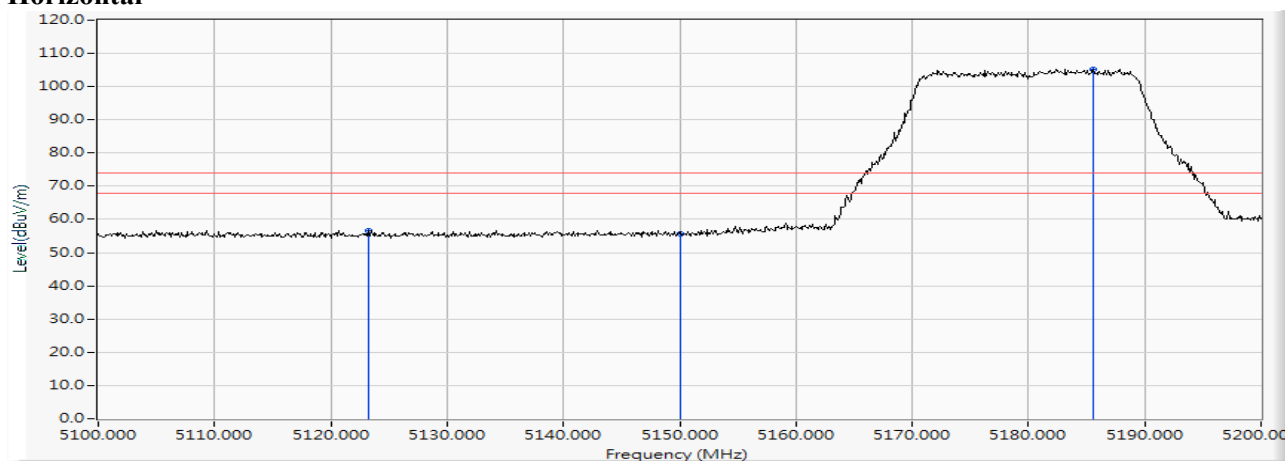


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5123.200	15.179	41.595	56.774	-17.226	74.000	PEAK
2		5150.000	15.307	40.228	55.535	-18.465	74.000	PEAK
3	*	5185.600	15.417	89.879	105.296	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 6: SISO A: Transmit (802.11ax-20BW_8.6Mbps)-Channel 36 (5180MHz)

Horizontal

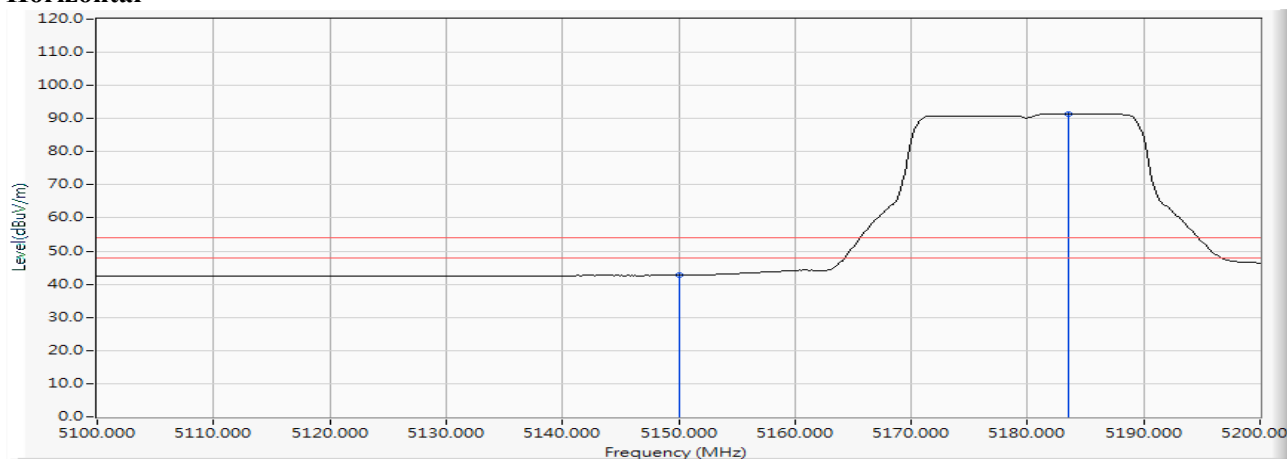


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	27.391	42.698	-11.302	54.000	AVERAGE
2	*	5183.478	15.407	76.033	91.440	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 6: SISO A: Transmit (802.11ax-20BW_8.6Mbps)-Channel 36 (5180MHz)

Vertical

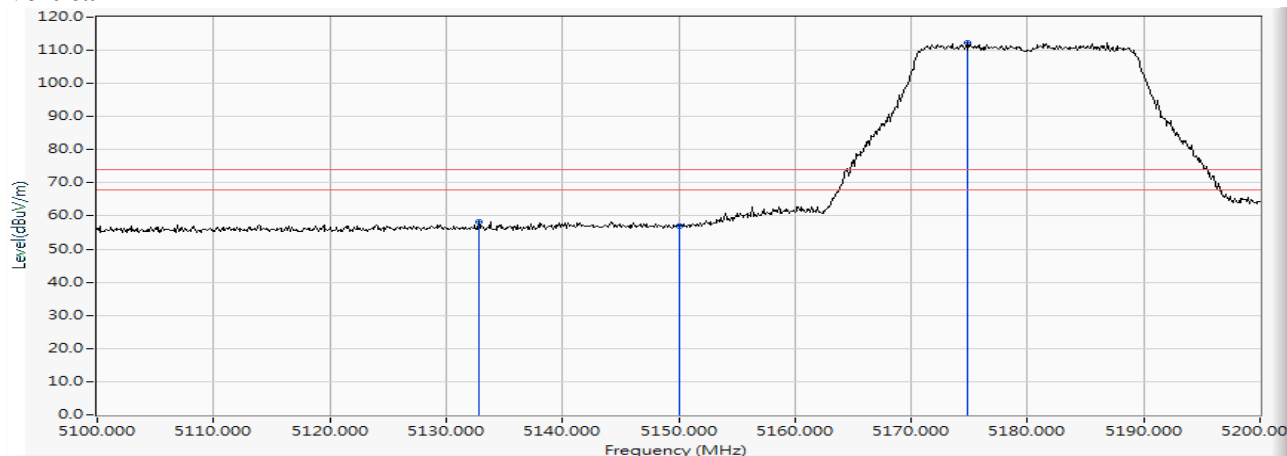


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5132.800	15.212	43.044	58.255	-15.745	74.000	PEAK
2		5150.000	15.307	41.555	56.862	-17.138	74.000	PEAK
3	*	5174.800	15.369	96.994	112.363	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 6: SISO A: Transmit (802.11ax-20BW_8.6Mbps)-Channel 36 (5180MHz)

Vertical

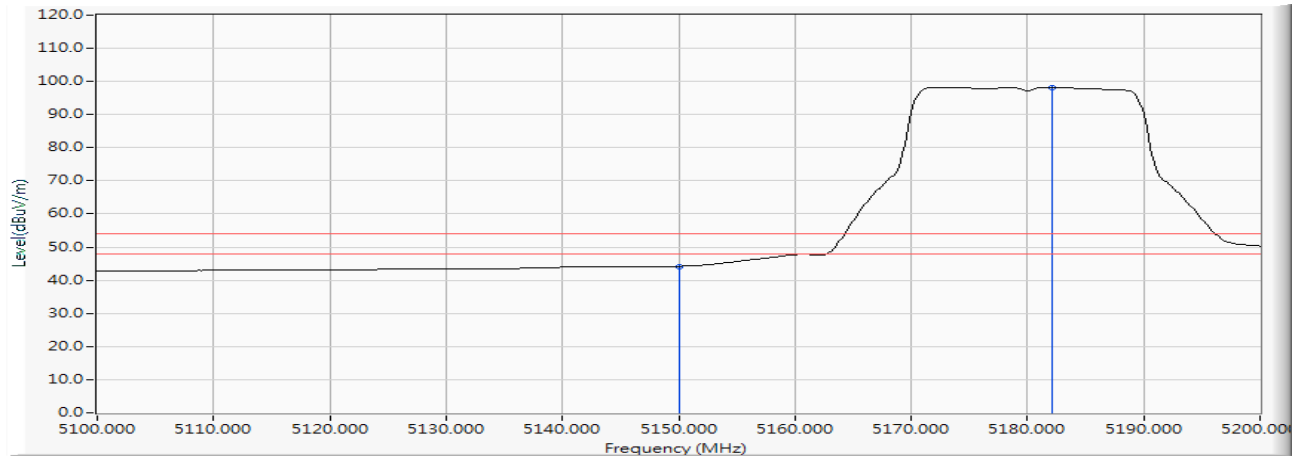


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	28.904	44.211	-9.789	54.000	AVERAGE
2	*	5182.174	15.401	82.772	98.174	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 6: SISO A: Transmit (802.11ax-20BW_8.6Mbps)-Channel 64 (5320MHz)

Horizontal

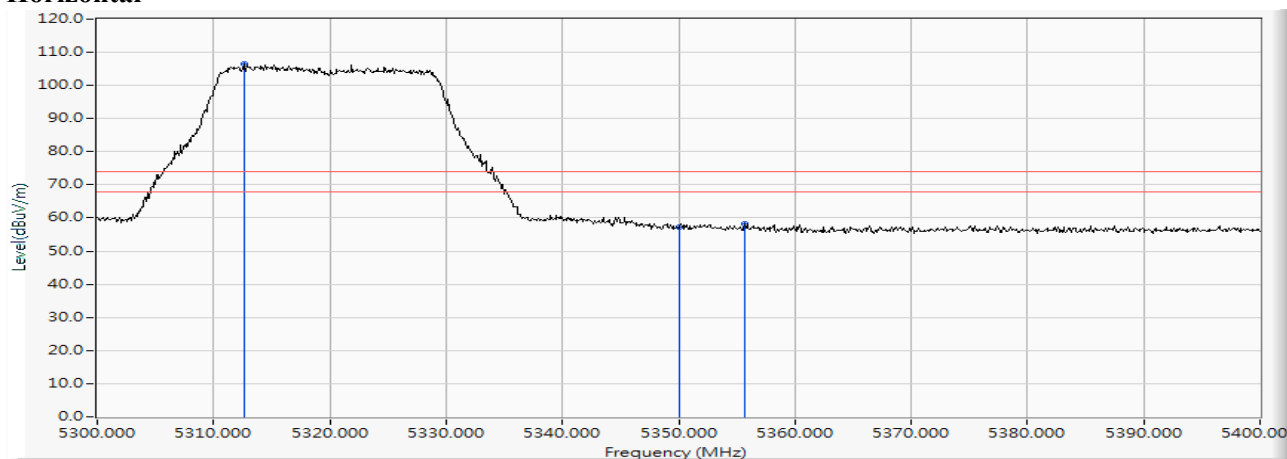


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5312.600	15.827	90.541	106.368	--	--	PEAK
2		5350.000	15.912	41.320	57.232	-16.768	74.000	PEAK
3		5355.700	15.930	42.401	58.331	-15.669	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 6: SISO A: Transmit (802.11ax-20BW_8.6Mbps)-Channel 64 (5320MHz)

Horizontal

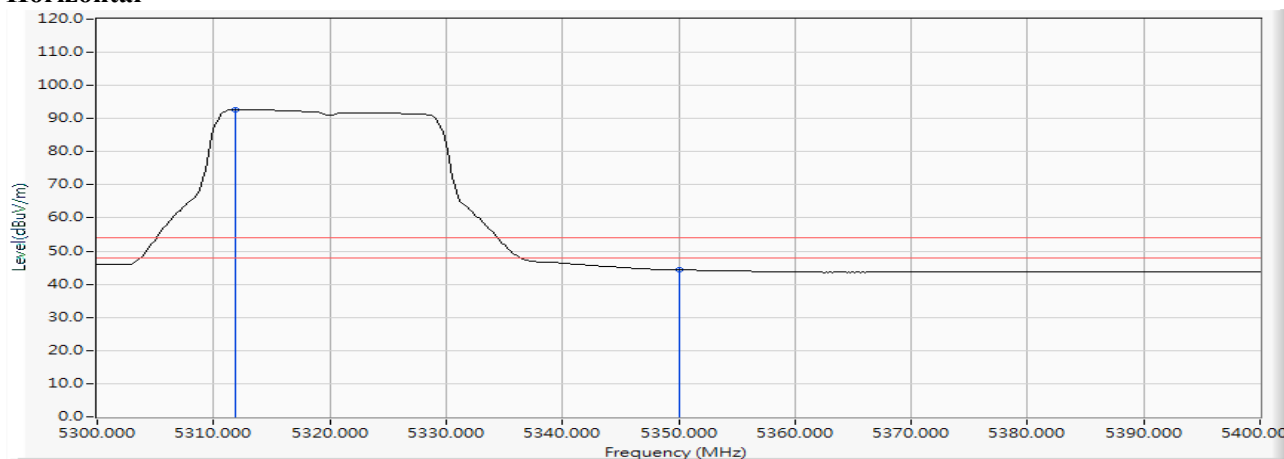


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5311.884	15.825	76.901	92.726	--	--	AVERAGE
2		5350.000	15.912	28.428	44.340	-9.660	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 6: SISO A: Transmit (802.11ax-20BW_8.6Mbps)-Channel 64 (5320MHz)

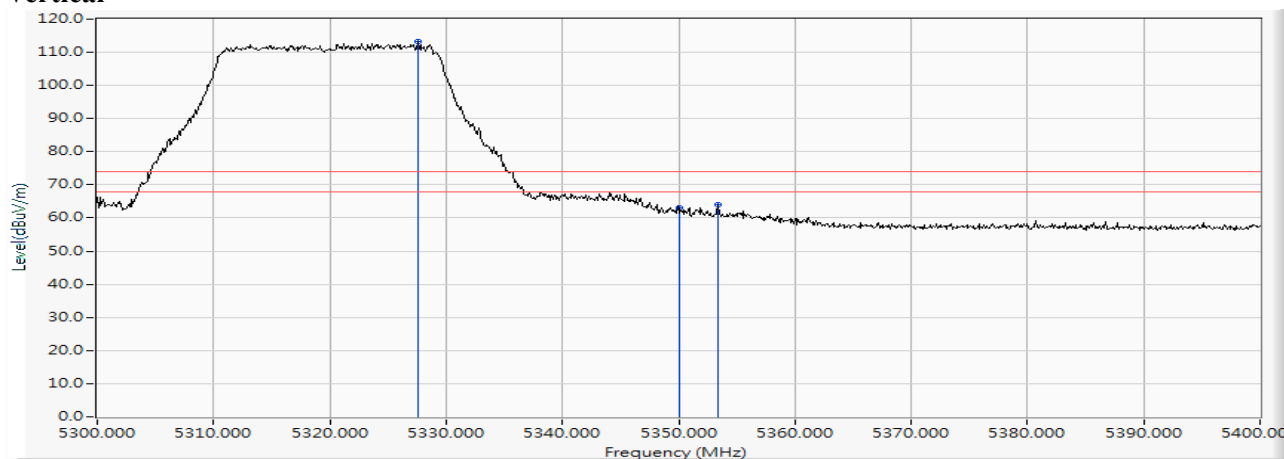
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5327.600	15.874	97.268	113.142	--	--	PEAK
2		5350.000	15.912	47.156	63.068	-10.932	74.000	PEAK
3		5353.400	15.923	47.980	63.903	-10.097	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 6: SISO A: Transmit (802.11ax-20BW_8.6Mbps)-Channel 64 (5320MHz)

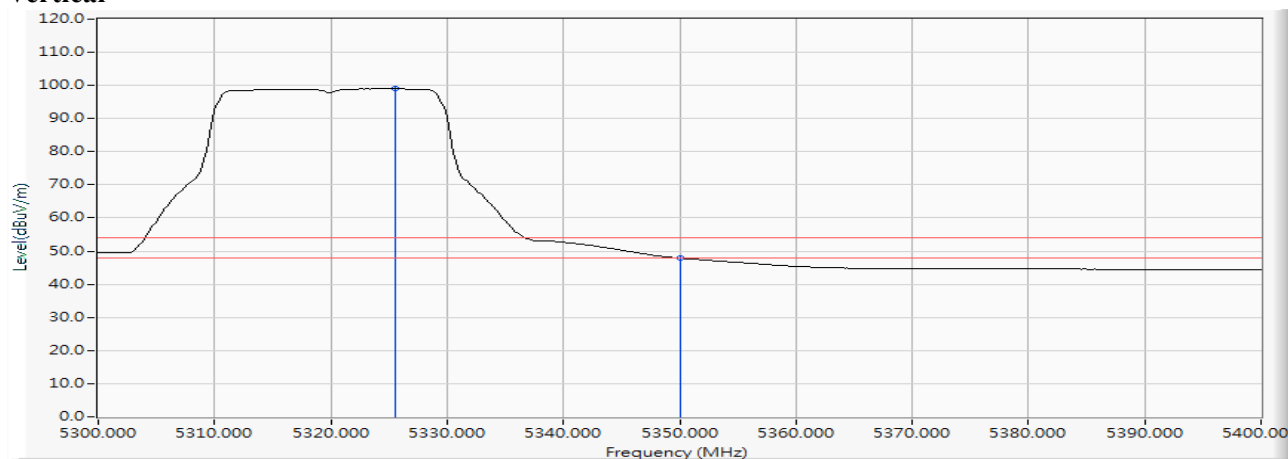Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5325.507	15.868	83.151	99.018	--	--	AVERAGE
2		5350.000	15.912	31.972	47.884	-6.116	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 6: SISO A: Transmit (802.11ax-20BW_8.6Mbps)-Channel 100 (5500MHz)

Horizontal

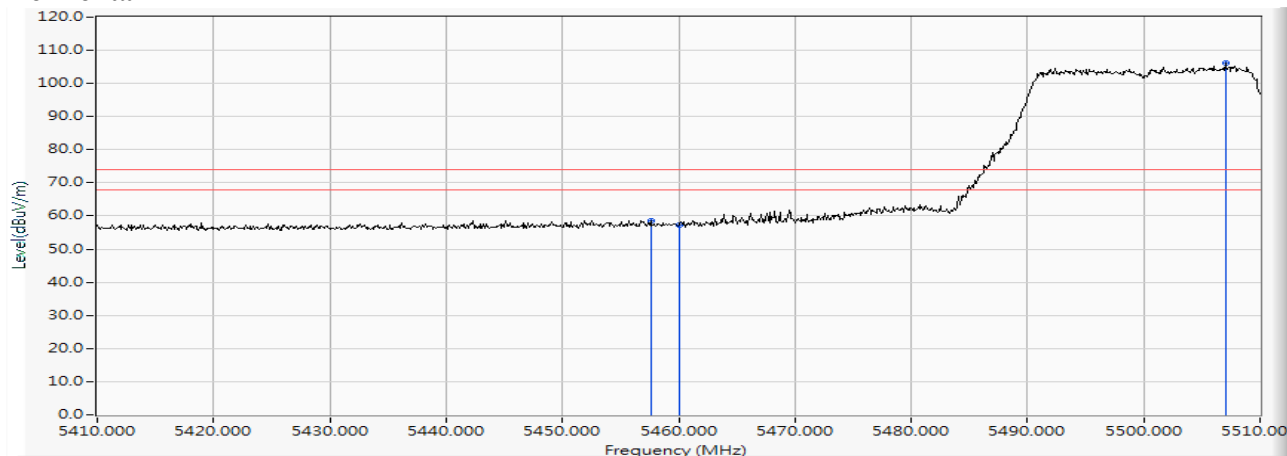


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5457.600	16.181	42.494	58.675	-15.325	74.000	PEAK
2		5460.000	16.185	41.062	57.247	-16.753	74.000	PEAK
3	*	5507.000	16.273	89.798	106.071	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 6: SISO A: Transmit (802.11ax-20BW_8.6Mbps)-Channel 100 (5500MHz)

Horizontal

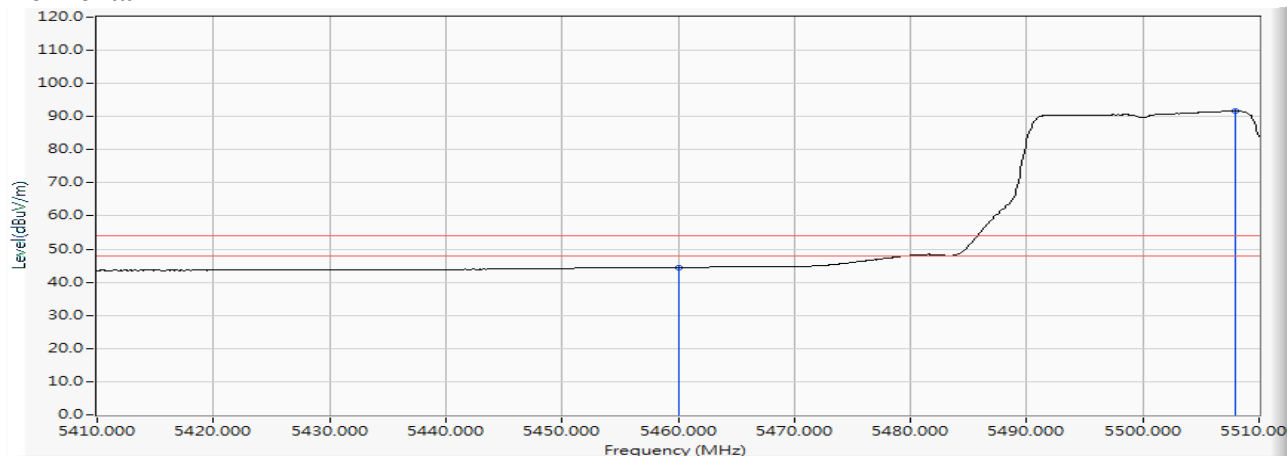


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5460.000	16.185	28.325	44.510	-9.490	54.000	AVERAGE
2	*	5508.000	16.275	75.466	91.740	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 6: SISO A: Transmit (802.11ax-20BW_8.6Mbps)-Channel 100 (5500MHz)

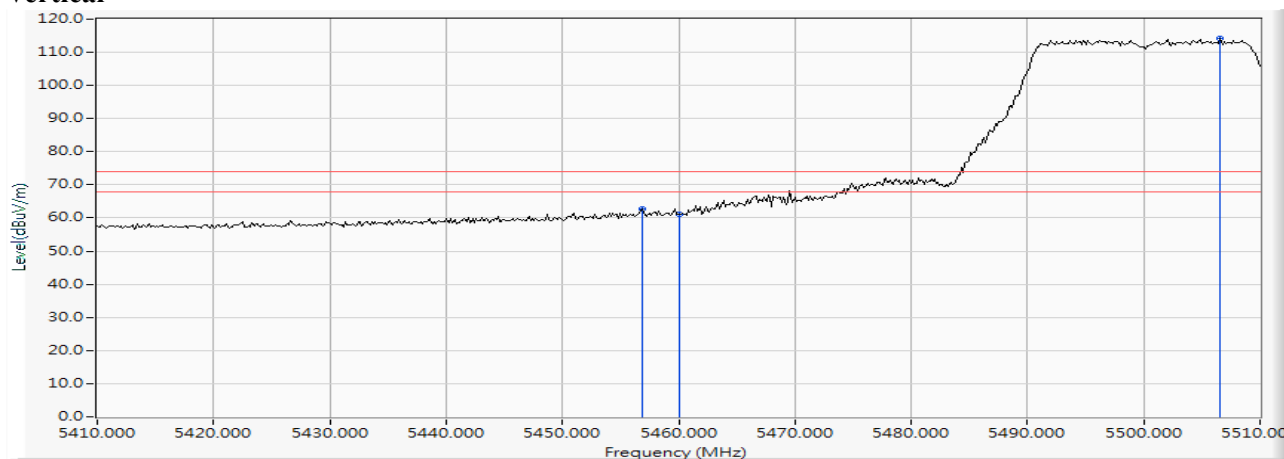
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5456.812	16.180	46.611	62.791	-11.209	74.000	PEAK
2		5460.000	16.185	44.944	61.129	-12.871	74.000	PEAK
3	*	5506.522	16.273	97.885	114.158	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 6: SISO A: Transmit (802.11ax-20BW_8.6Mbps)-Channel 100 (5500MHz)

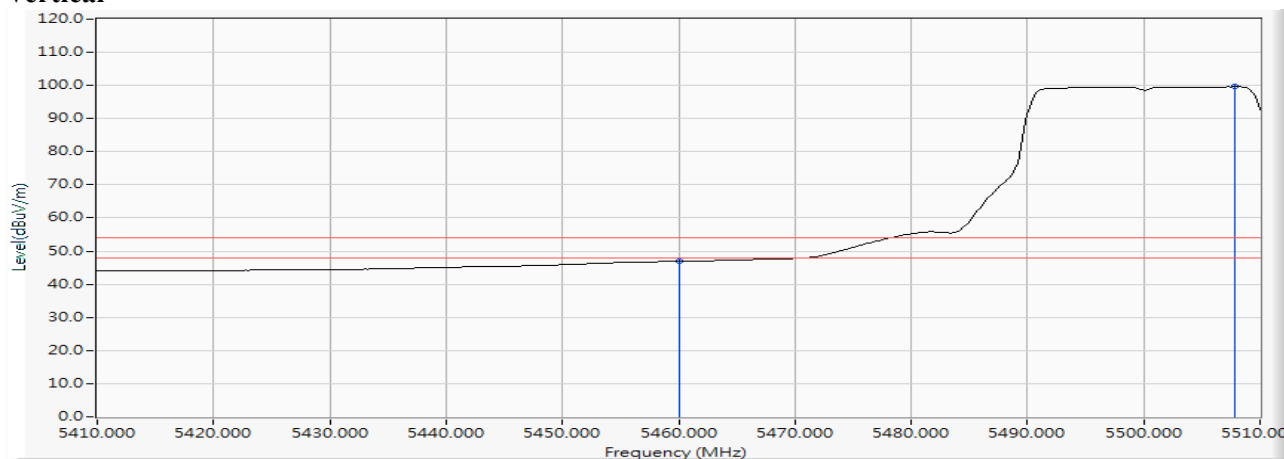Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5460.000	16.185	30.746	46.931	-7.069	54.000	AVERAGE
2	*	5507.826	16.274	83.326	99.600	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 6: SISO A: Transmit (802.11ax-20BW_8.6Mbps)-Channel 100 (5500MHz)

Horizontal

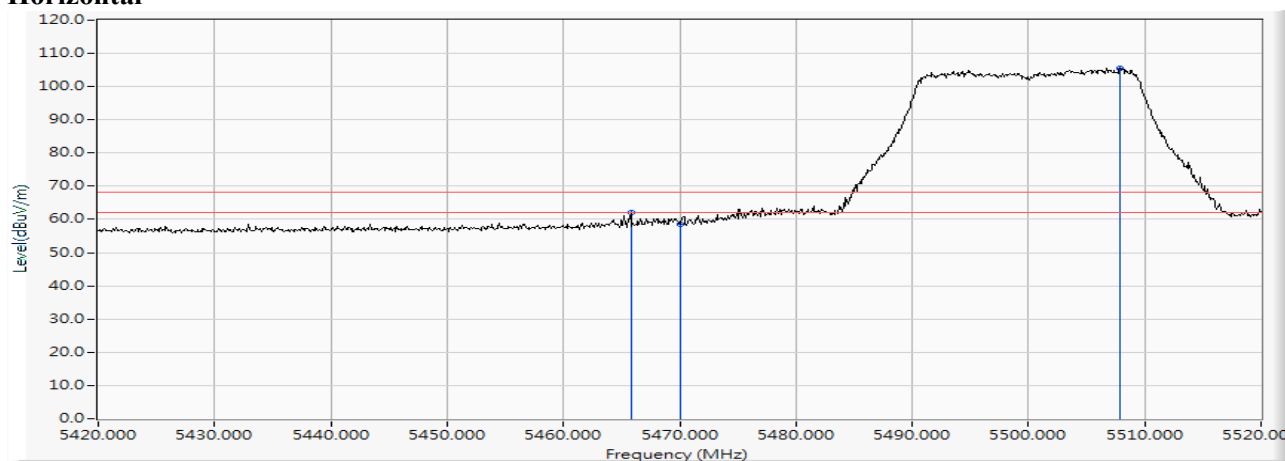

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5465.800	16.193	45.868	62.061	-6.159	68.220	PEAK
2		5470.000	16.200	42.335	58.535	-9.685	68.220	PEAK
3	*	5507.900	16.274	89.248	105.522	--	--	PEAK


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 6: SISO A: Transmit (802.11ax-20BW_8.6Mbps)-Channel 100 (5500MHz)

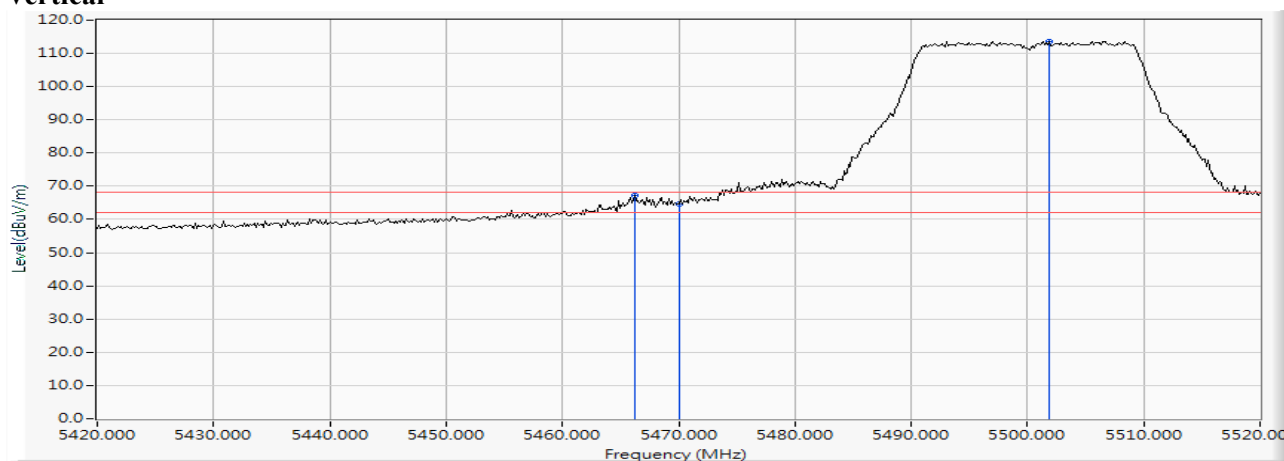Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5466.232	16.193	50.895	67.089	-1.131	68.220	PEAK
2		5470.000	16.200	48.459	64.659	-3.561	68.220	PEAK
3	*	5501.884	16.272	97.411	113.684	--	--	PEAK


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 6: SISO A: Transmit (802.11ax-20BW_8.6Mbps)-Channel 140 (5700MHz)

Horizontal

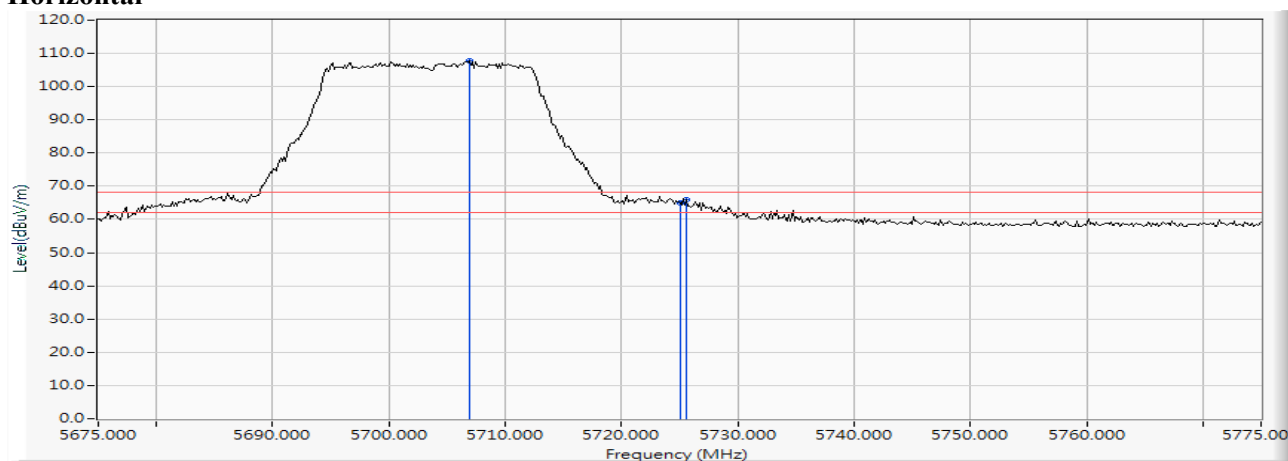

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5706.884	16.510	91.109	107.619	--	--	PEAK
2		5725.000	16.544	48.314	64.858	-3.362	68.220	PEAK
3		5725.580	16.546	49.556	66.101	-2.119	68.220	PEAK


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 6: SISO A: Transmit (802.11ax-20BW_8.6Mbps)-Channel 140 (5700MHz)

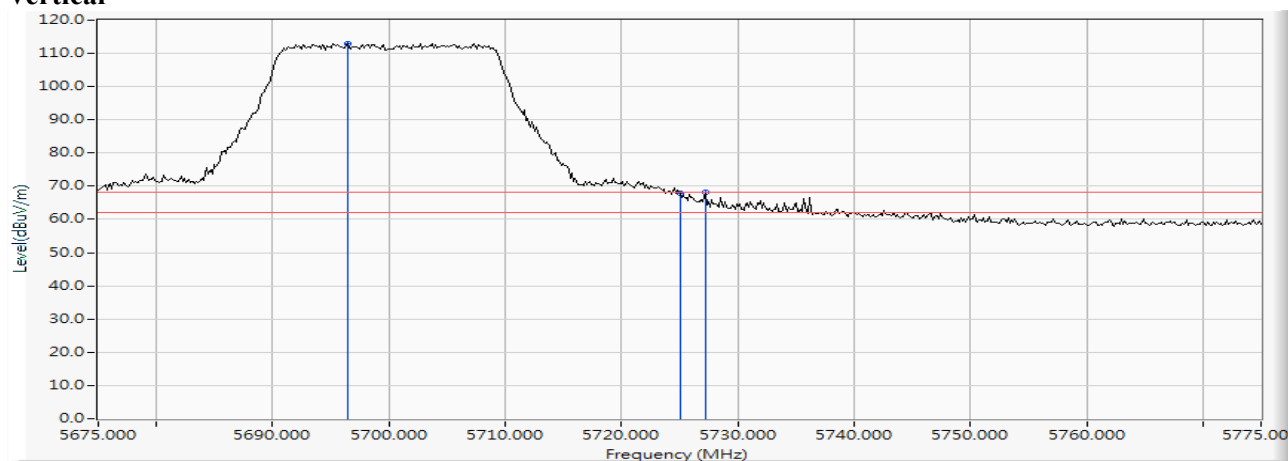Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5696.449	16.496	96.565	113.062	--	--	PEAK
2		5725.000	16.544	51.188	67.732	-0.488	68.220	PEAK
3		5727.174	16.547	51.549	68.096	-0.124	68.220	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 6: SISO A: Transmit (802.11ax-20BW_8.6Mbps)-Channel 149 (5745MHz)


Horizontal

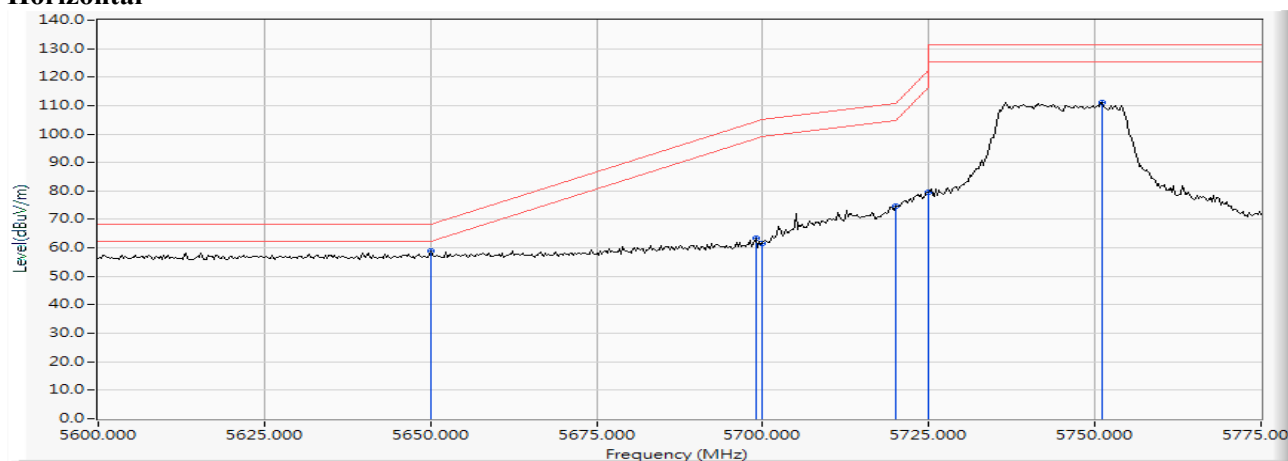

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5650.000	16.447	42.466	58.913	-9.307	68.220	PEAK
2		5698.913	16.500	46.964	63.464	-40.932	104.396	PEAK
3		5700.000	16.502	45.213	61.715	-43.485	105.200	PEAK
4		5720.000	16.535	58.139	74.674	-36.126	110.800	PEAK
5		5725.000	16.544	62.951	79.495	-42.705	122.200	PEAK
6		5751.159	16.570	94.621	111.191	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 6: SISO A: Transmit (802.11ax-20BW_8.6Mbps)-Channel 149 (5745MHz)


Vertical

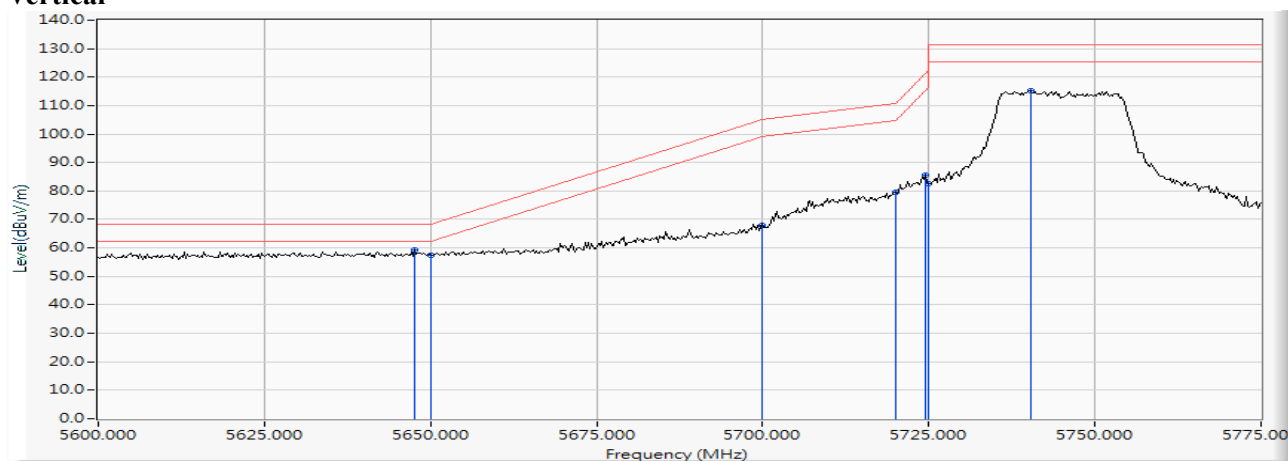

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5647.681	16.440	42.907	59.347	-8.873	68.220	PEAK
2		5650.000	16.447	40.871	57.318	-10.902	68.220	PEAK
3		5700.000	16.502	51.609	68.111	-37.089	105.200	PEAK
4		5720.000	16.535	63.049	79.584	-31.216	110.800	PEAK
5		5724.529	16.543	69.182	85.725	-35.401	121.126	PEAK
6		5725.000	16.544	66.216	82.760	-39.440	122.200	PEAK
7		5740.253	16.556	98.654	115.210	--	--	PEAK


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 6: SISO A: Transmit (802.11ax-20BW_8.6Mbps)-Channel 165 (5825MHz)

Horizontal

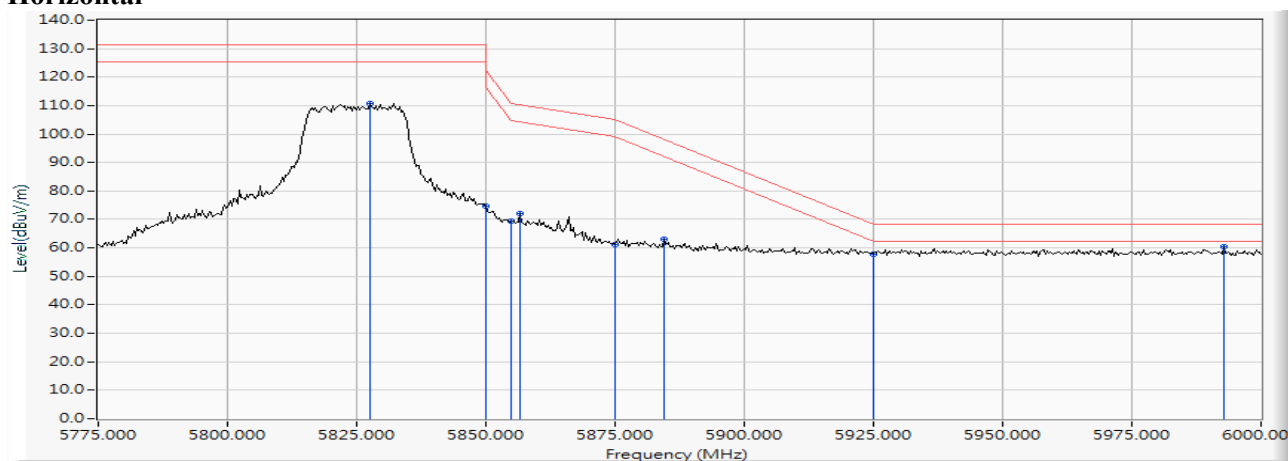

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5827.500	16.715	94.113	110.828	--	--	PEAK
2		5850.000	16.748	58.127	74.875	-47.325	122.200	PEAK
3		5855.000	16.758	52.497	69.255	-41.545	110.800	PEAK
4		5856.522	16.761	55.314	72.076	-38.298	110.374	PEAK
5		5875.000	16.807	44.444	61.252	-43.948	105.200	PEAK
6		5884.565	16.834	46.046	62.881	-35.241	98.122	PEAK
7		5925.000	16.920	40.874	57.794	-10.406	68.200	PEAK
8	*	5992.826	17.041	43.398	60.438	-7.762	68.200	PEAK


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 6: SISO A: Transmit (802.11ax-20BW_8.6Mbps)-Channel 165 (5825MHz)

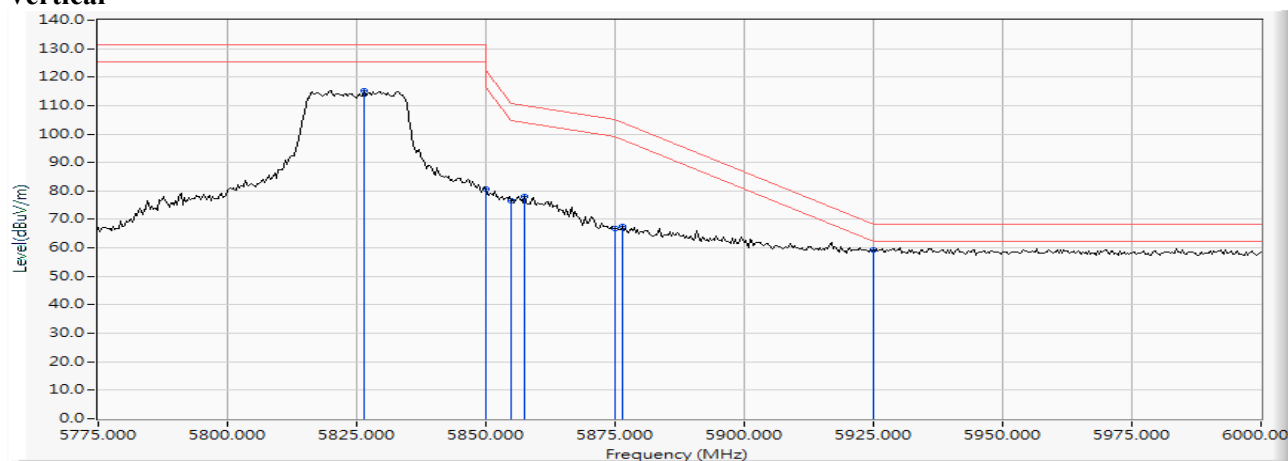Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5826.522	16.713	98.543	115.256	--	--	PEAK
2		5850.000	16.748	64.057	80.805	-41.395	122.200	PEAK
3		5855.000	16.758	59.711	76.469	-34.331	110.800	PEAK
4		5857.500	16.764	61.463	78.227	-31.873	110.100	PEAK
5		5875.000	16.807	49.954	66.762	-38.438	105.200	PEAK
6		5876.413	16.812	50.873	67.684	-36.470	104.154	PEAK
7	*	5925.000	16.920	42.485	59.405	-8.795	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps)-Channel 38 (5190MHz)

Horizontal

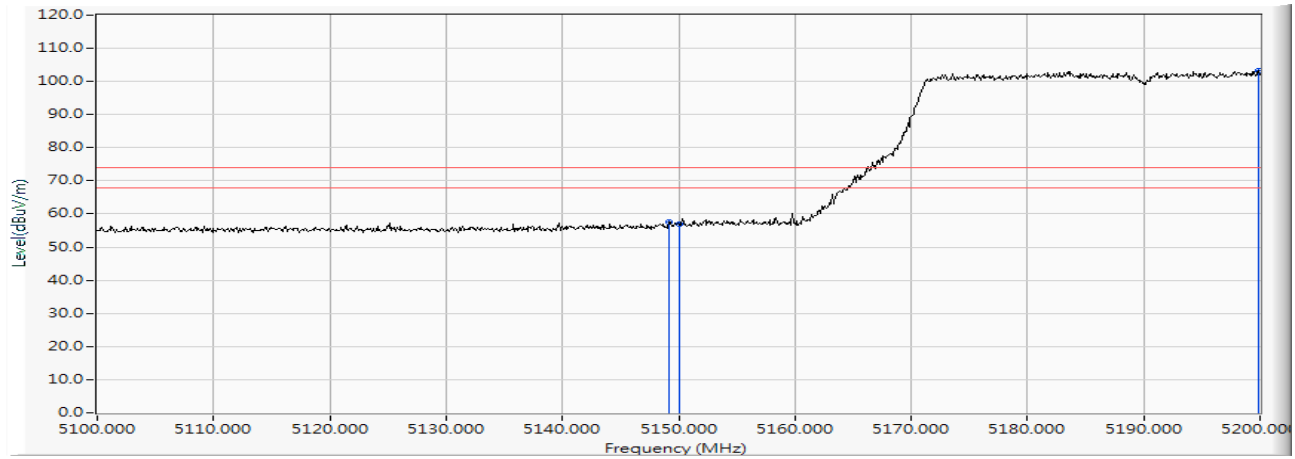


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5149.200	15.302	42.376	57.679	-16.321	74.000	PEAK
2		5150.000	15.307	41.595	56.902	-17.098	74.000	PEAK
3	*	5199.900	15.472	87.804	103.277	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps)-Channel 38 (5190MHz)

Horizontal

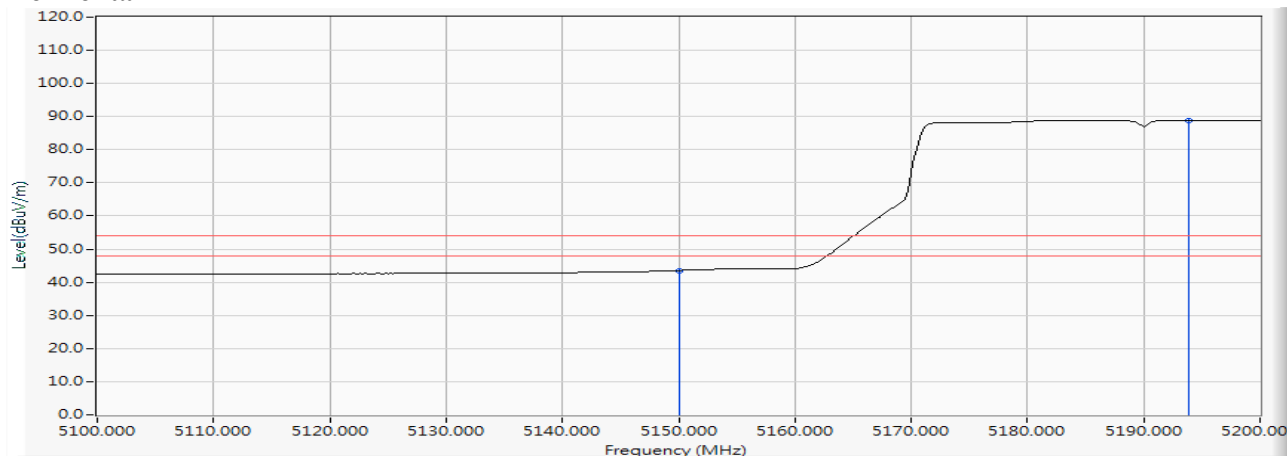


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	28.260	43.567	-10.433	54.000	AVERAGE
2	*	5193.913	15.450	73.459	88.909	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps)-Channel 38 (5190MHz)

Vertical

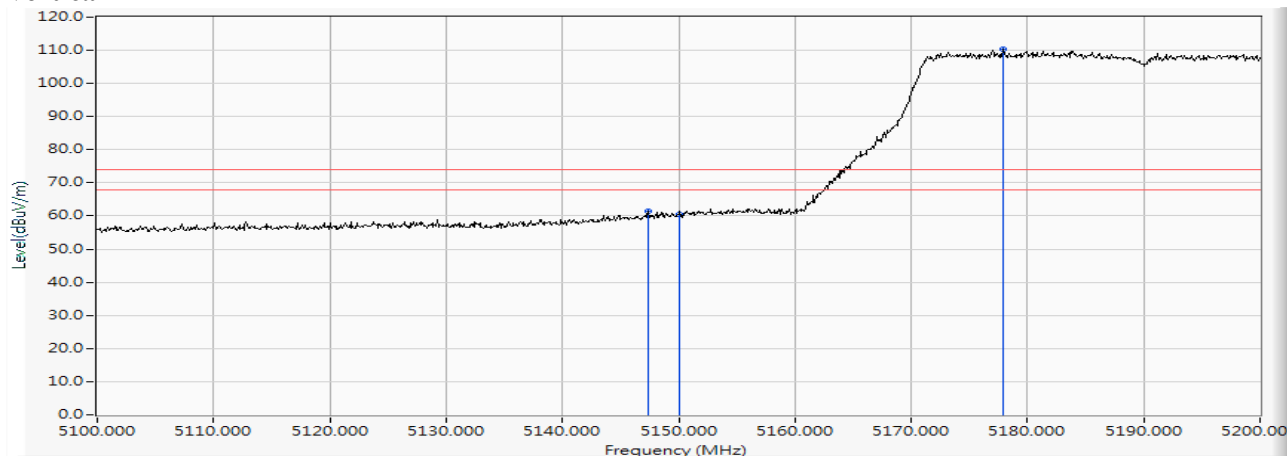


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5147.400	15.292	46.004	61.296	-12.704	74.000	PEAK
2		5150.000	15.307	45.207	60.514	-13.486	74.000	PEAK
3	*	5177.900	15.382	94.849	110.232	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps)-Channel 38 (5190MHz)

Vertical

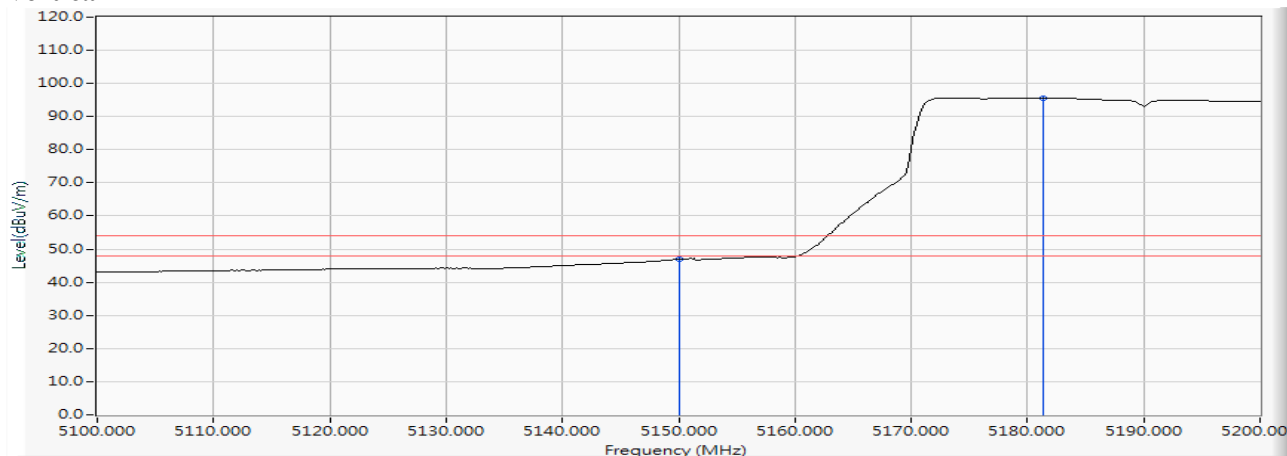


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	31.618	46.925	-7.075	54.000	AVERAGE
2	*	5181.304	15.398	80.229	95.627	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps)-Channel 62 (5310MHz)

Horizontal

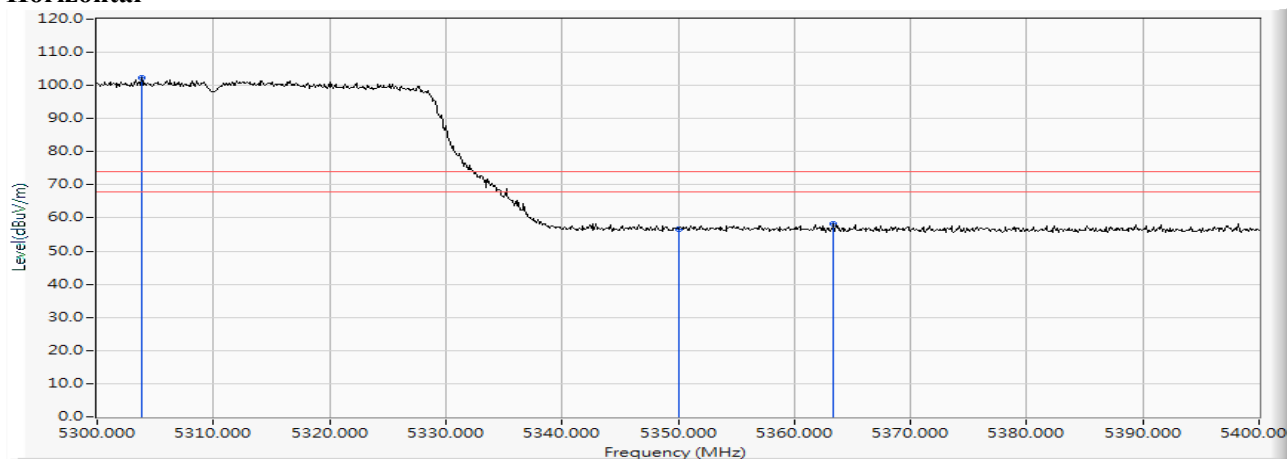


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5303.800	15.806	86.619	102.424	--	--	PEAK
2		5350.000	15.912	40.730	56.642	-17.358	74.000	PEAK
3		5363.400	15.954	42.297	58.251	-15.749	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps)-Channel 62 (5310MHz)

Horizontal

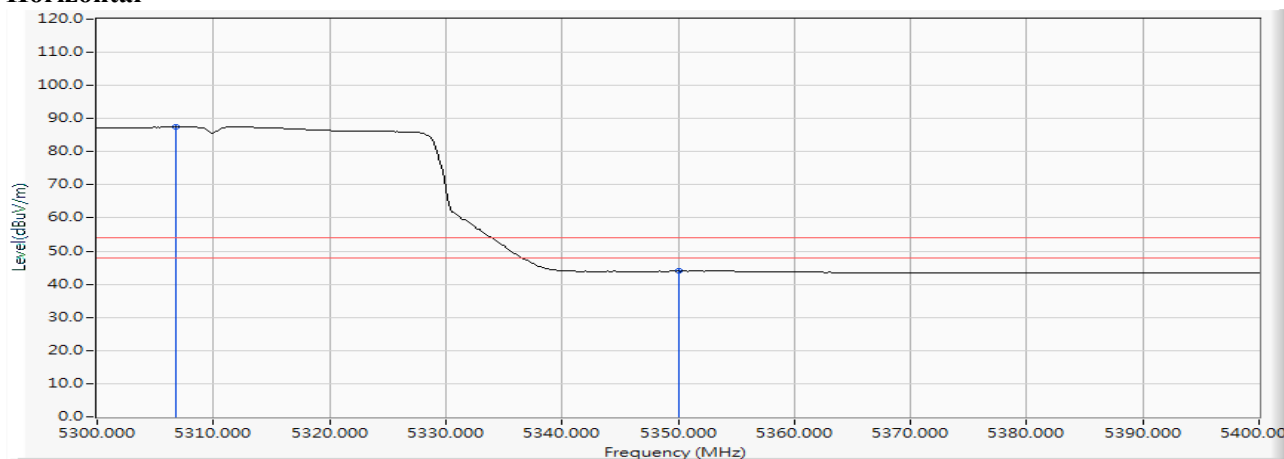


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5306.812	15.813	71.617	87.430	--	--	AVERAGE
2		5350.000	15.912	28.004	43.916	-10.084	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps)-Channel 62 (5310MHz)

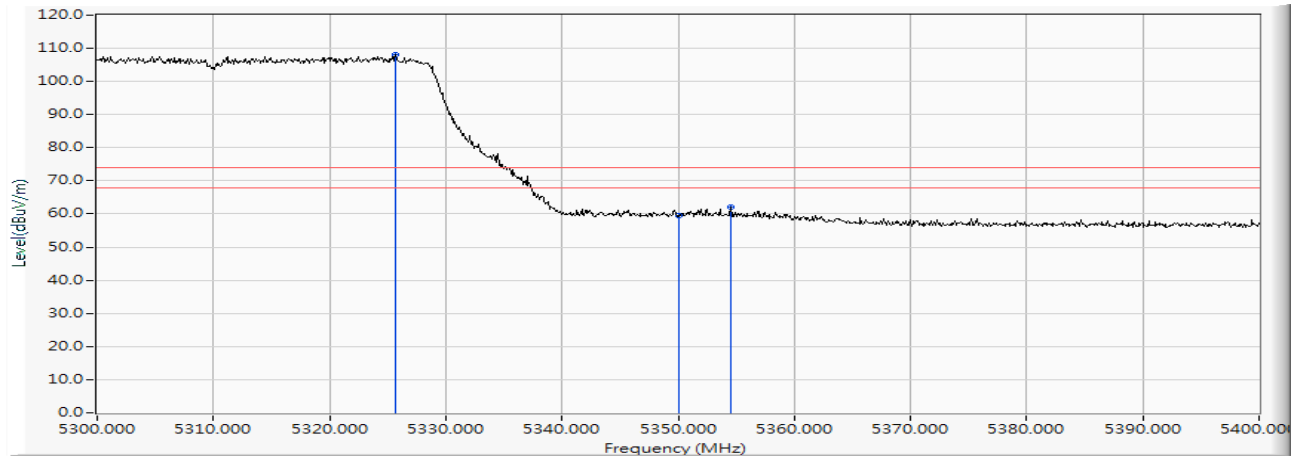
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5325.700	15.868	92.229	108.097	--	--	PEAK
2		5350.000	15.912	43.490	59.402	-14.598	74.000	PEAK
3		5354.500	15.927	46.177	62.103	-11.897	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps)-Channel 62 (5310MHz)

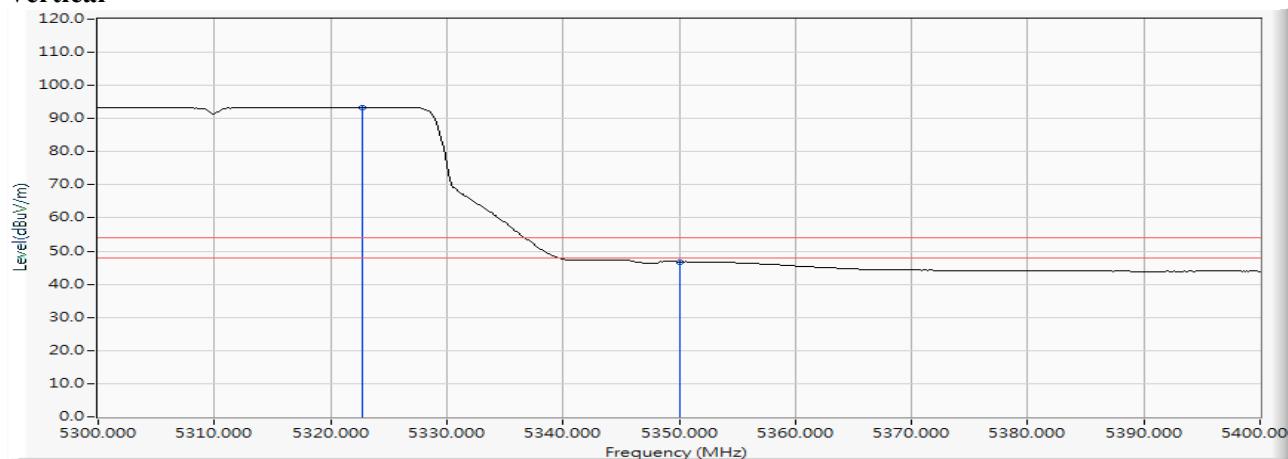Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5322.754	15.858	77.587	93.446	--	--	AVERAGE
2		5350.000	15.912	30.884	46.796	-7.204	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps)-Channel 102 (5510MHz)

Horizontal

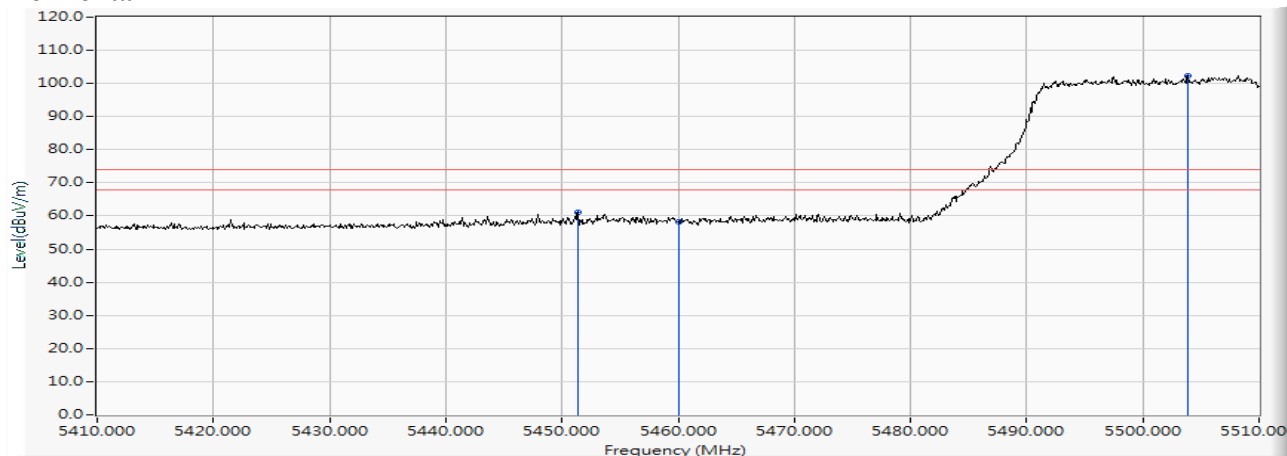


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5451.400	16.162	45.054	61.216	-12.784	74.000	PEAK
2		5460.000	16.185	42.088	58.273	-15.727	74.000	PEAK
3	*	5503.900	16.273	85.993	102.266	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps)-Channel 102 (5510MHz)

Horizontal

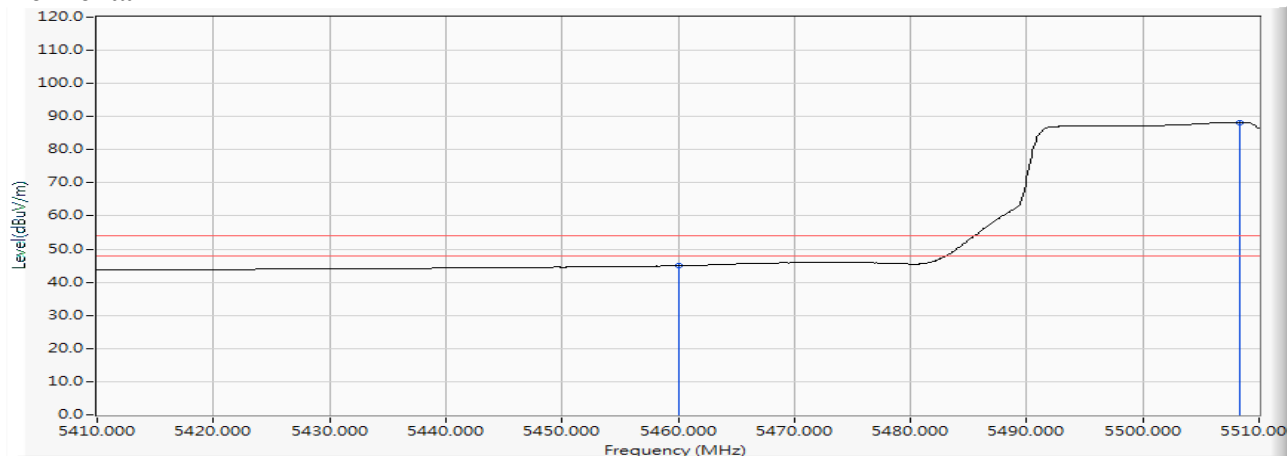


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5460.000	16.185	28.783	44.968	-9.032	54.000	AVERAGE
2	*	5508.400	16.275	72.013	88.287	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps)-Channel 102 (5510MHz)

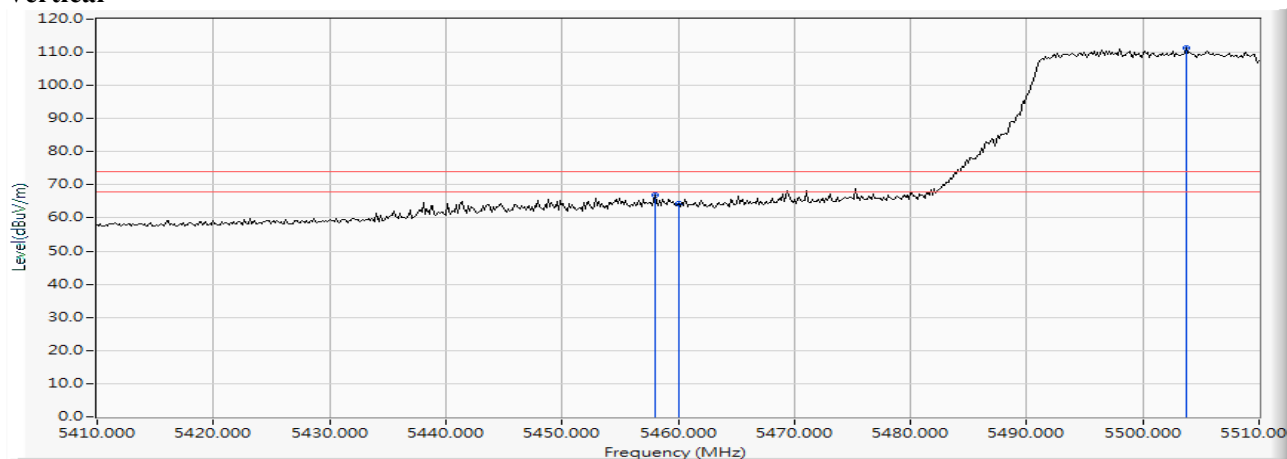
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5457.971	16.182	50.699	66.881	-7.119	74.000	PEAK
2		5460.000	16.185	48.180	64.365	-9.635	74.000	PEAK
3	*	5503.768	16.273	94.906	111.179	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps)-Channel 102 (5510MHz)

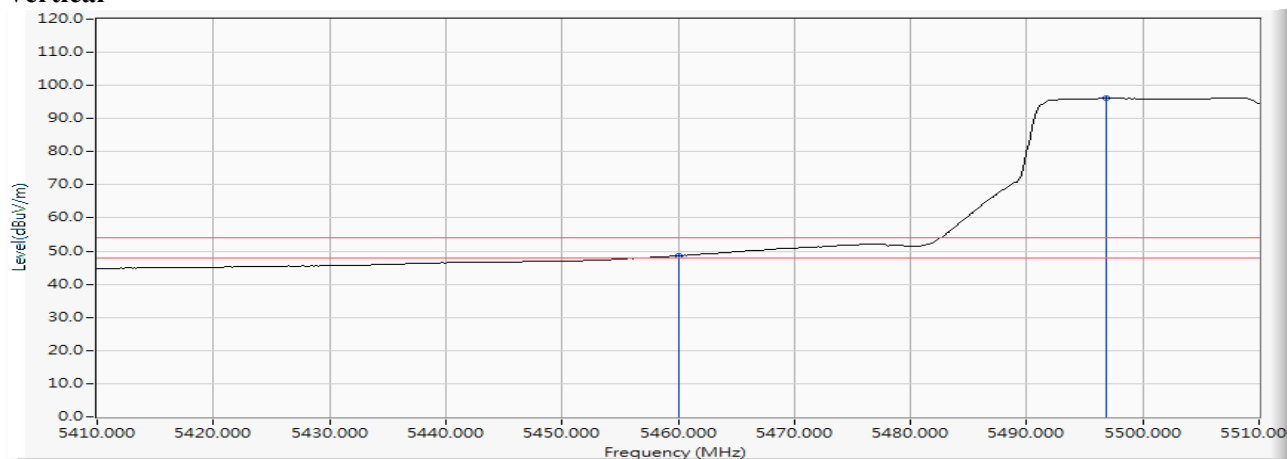Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5460.000	16.185	32.414	48.599	-5.401	54.000	AVERAGE
2	*	5496.812	16.266	79.859	96.125	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps)-Channel 102 (5510MHz)

Horizontal

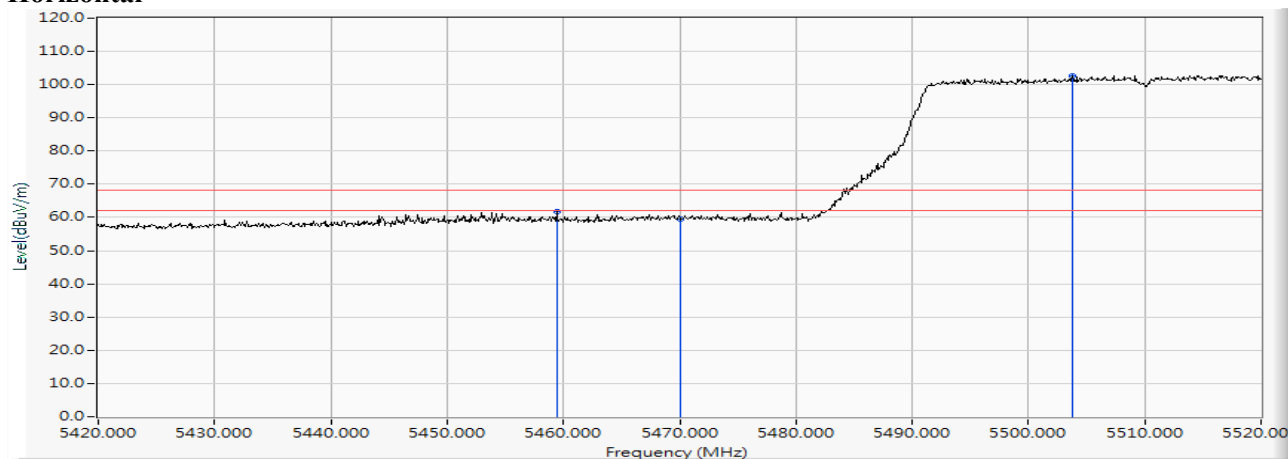

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5459.400	16.184	45.702	61.886	-6.334	68.220	PEAK
2		5470.000	16.200	43.394	59.594	-8.626	68.220	PEAK
3	*	5503.800	16.273	86.476	102.749	--	--	PEAK


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps)-Channel 102 (5510MHz)

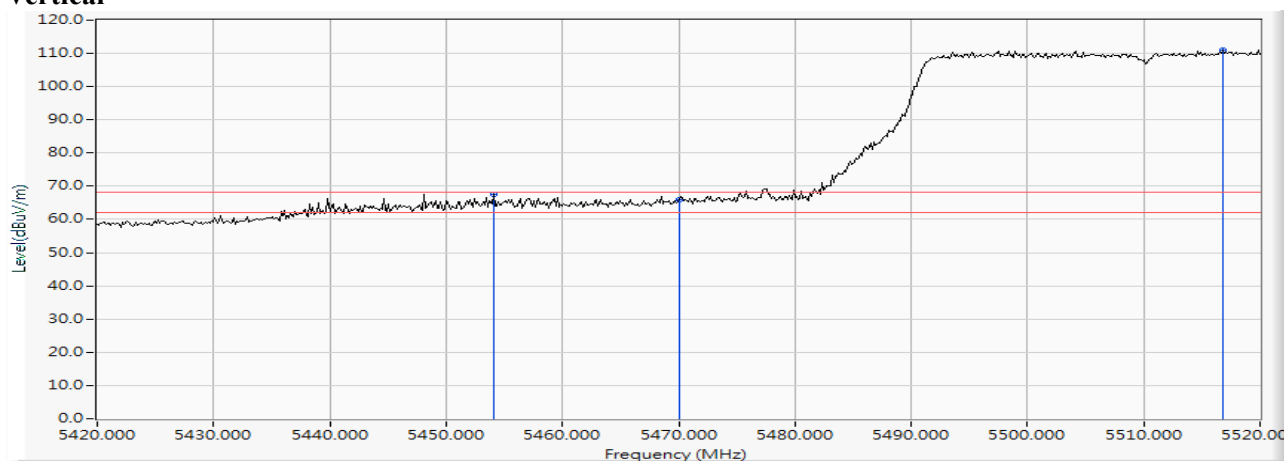Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5454.058	16.170	51.504	67.675	-0.545	68.220	PEAK
2		5470.000	16.200	49.792	65.992	-2.228	68.220	PEAK
3	*	5516.812	16.286	94.572	110.858	--	--	PEAK


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps)-Channel 134 (5670MHz)

Horizontal

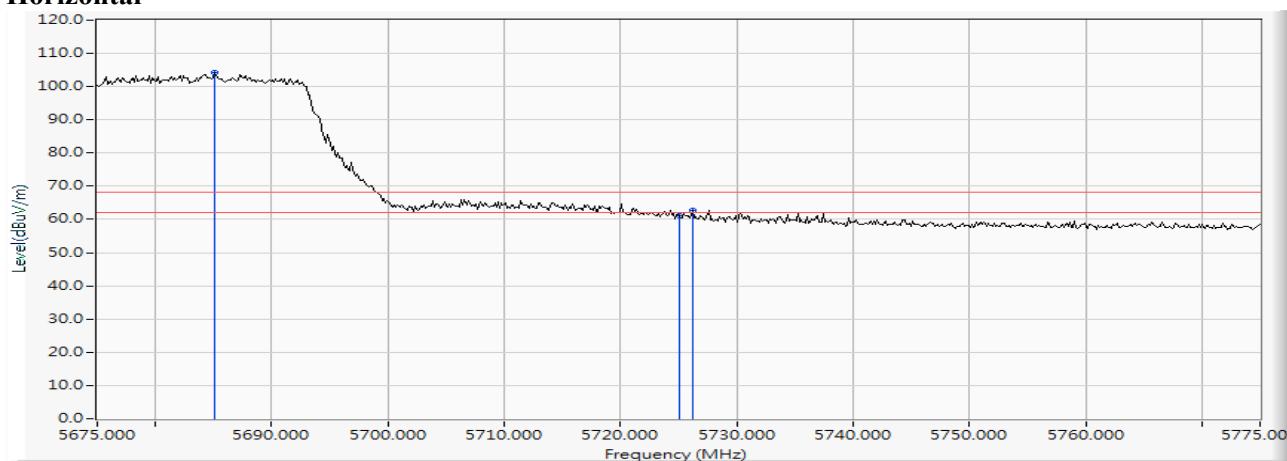

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5685.145	16.484	87.762	104.246	--	--	PEAK
2		5725.000	16.544	44.738	61.282	-6.938	68.220	PEAK
3		5726.159	16.546	46.227	62.773	-5.447	68.220	PEAK


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps)-Channel 134 (5670MHz)

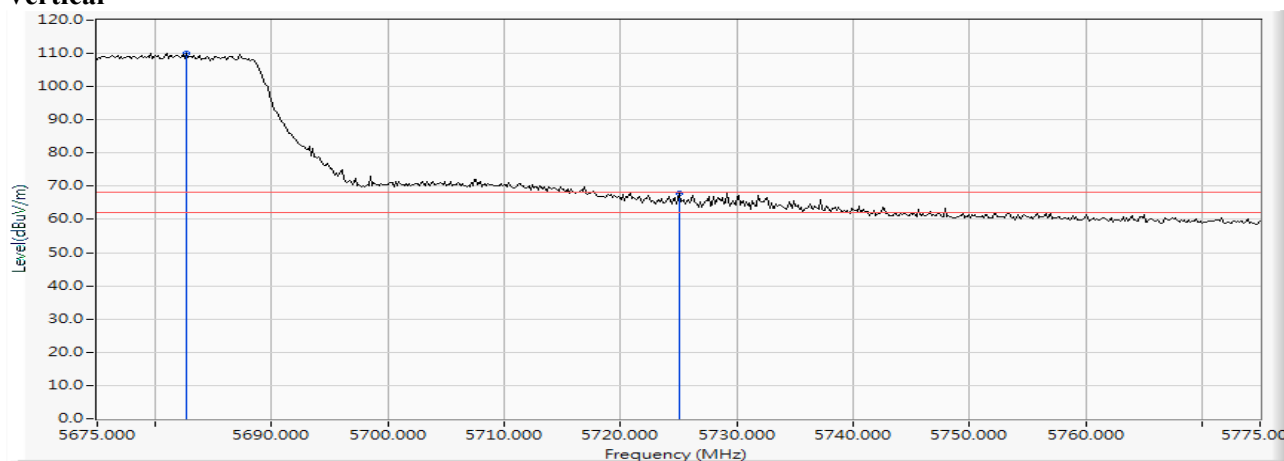Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5682.681	16.481	93.464	109.945	--	--	PEAK
2		5725.000	16.544	51.464	68.008	-0.212	68.220	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps)-Channel 151 (5755MHz)


Horizontal

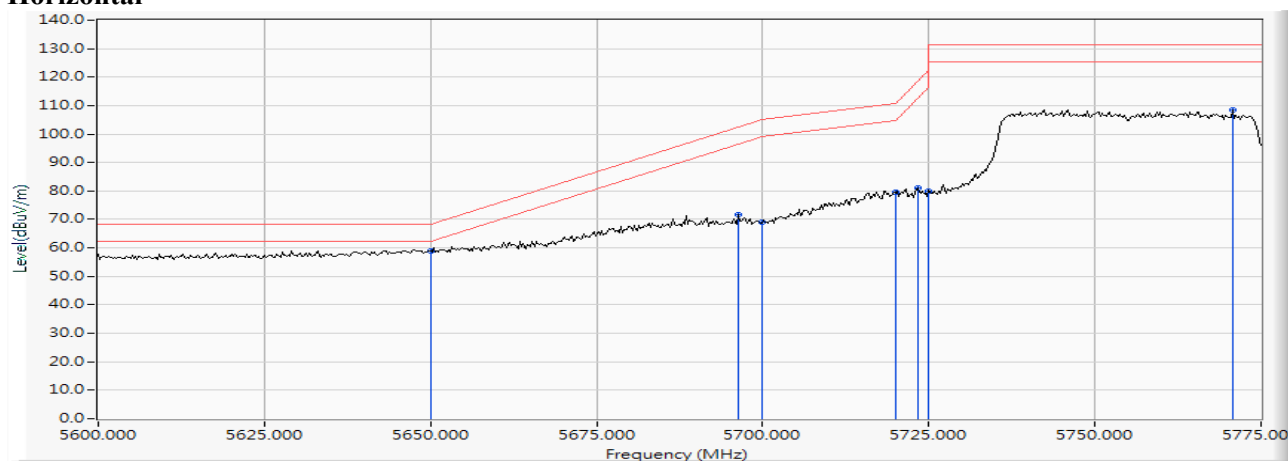

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5650.000	16.447	42.522	58.969	-9.251	68.220	PEAK
2		5696.377	16.496	55.342	71.839	-30.681	102.520	PEAK
3		5700.000	16.502	52.610	69.112	-36.088	105.200	PEAK
4		5720.000	16.535	62.869	79.404	-31.396	110.800	PEAK
5		5723.261	16.541	64.465	81.006	-37.229	118.235	PEAK
6		5725.000	16.544	63.443	79.987	-42.213	122.200	PEAK
7	*	5770.688	16.597	91.753	108.350	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps)-Channel 151 (5755MHz)


Vertical

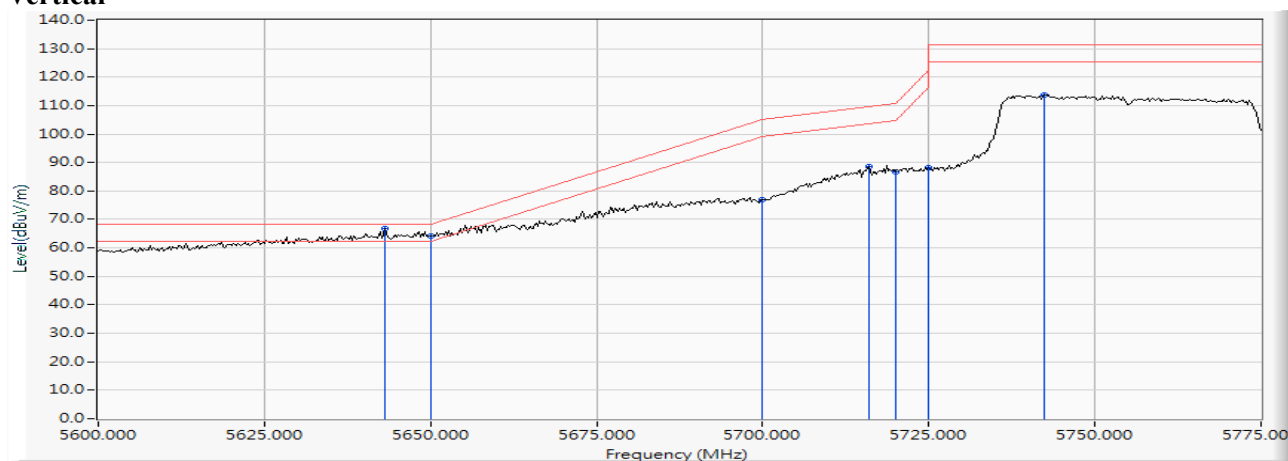

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5643.116	16.429	50.341	66.769	-1.451	68.220	PEAK
2		5650.000	16.447	47.663	64.110	-4.110	68.220	PEAK
3		5700.000	16.502	60.496	76.998	-28.202	105.200	PEAK
4		5715.906	16.527	72.120	88.647	-21.007	109.654	PEAK
5		5720.000	16.535	70.308	86.843	-23.957	110.800	PEAK
6		5725.000	16.544	71.573	88.117	-34.083	122.200	PEAK
7	*	5742.283	16.557	97.159	113.716	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps)-Channel 159 (5795MHz)


Horizontal

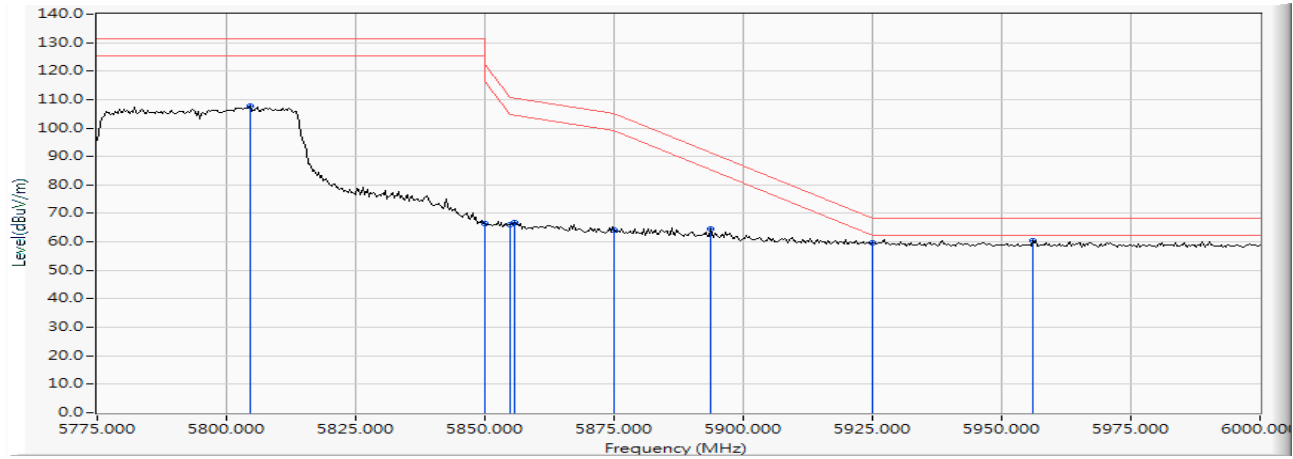

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5804.674	16.671	91.013	107.684	--	--	PEAK
2		5850.000	16.748	49.545	66.293	-55.907	122.200	PEAK
3		5855.000	16.758	49.377	66.135	-44.665	110.800	PEAK
4		5855.870	16.761	50.167	66.927	-43.629	110.556	PEAK
5		5875.000	16.807	47.365	64.173	-41.027	105.200	PEAK
6		5893.696	16.852	47.625	64.477	-26.888	91.365	PEAK
7		5925.000	16.920	42.621	59.541	-8.659	68.200	PEAK
8		5955.978	16.966	43.570	60.535	-7.665	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 7: SISO A: Transmit (802.11ax-40BW_17.2Mbps)-Channel 159 (5795MHz)


Vertical

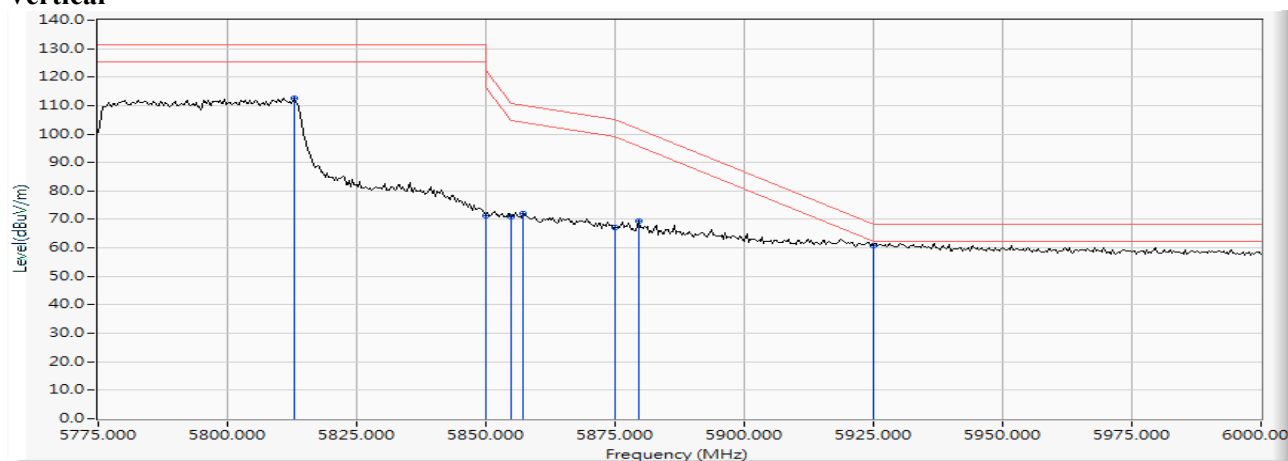

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5812.826	16.692	95.887	112.578	--	--	PEAK
2		5850.000	16.748	54.610	71.358	-50.842	122.200	PEAK
3		5855.000	16.758	54.122	70.880	-39.920	110.800	PEAK
4		5857.174	16.763	55.281	72.044	-38.147	110.191	PEAK
5		5875.000	16.807	50.308	67.116	-38.084	105.200	PEAK
6		5879.674	16.820	52.620	69.441	-32.300	101.741	PEAK
7		5925.000	16.920	43.843	60.763	-7.437	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 8: SISO A: Transmit (802.11ax-80BW_36Mbps)-Channel 42 (5210MHz)

Horizontal

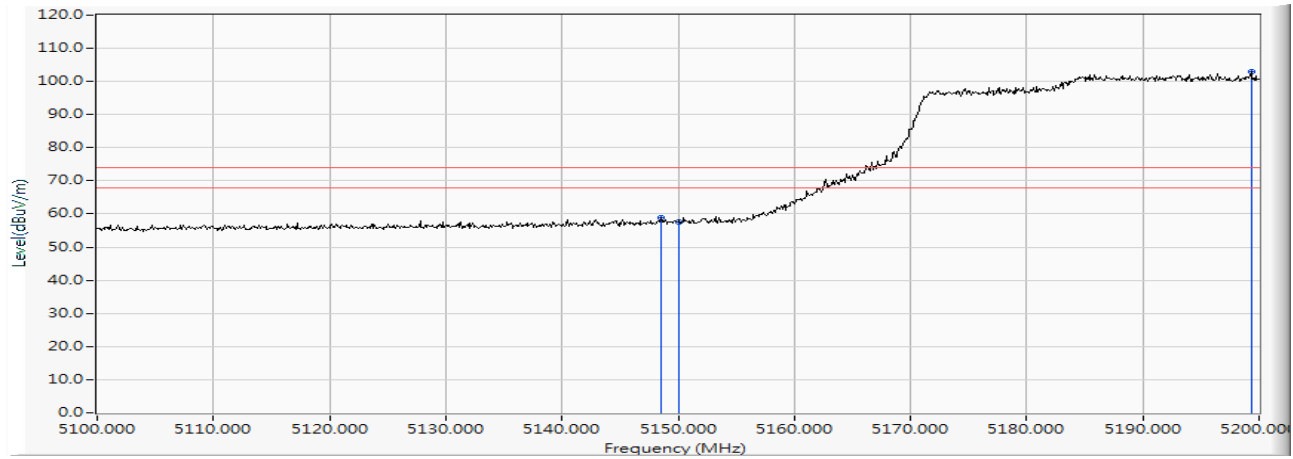


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5148.500	15.299	43.685	58.983	-15.017	74.000	PEAK
2		5150.000	15.307	42.210	57.517	-16.483	74.000	PEAK
3	*	5199.300	15.470	87.324	102.794	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 8: SISO A: Transmit (802.11ax-80BW_36Mbps)-Channel 42 (5210MHz)

Horizontal

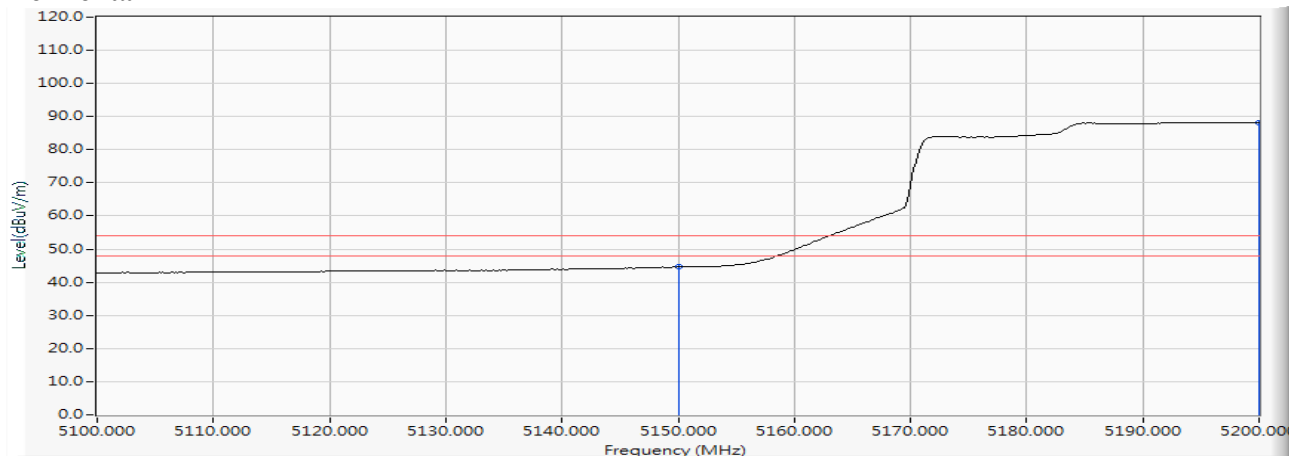


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	29.254	44.561	-9.439	54.000	AVERAGE
2	*	5200.000	15.473	72.687	88.160	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 8: SISO A: Transmit (802.11ax-80BW_36Mbps)-Channel 42 (5210MHz)

Vertical

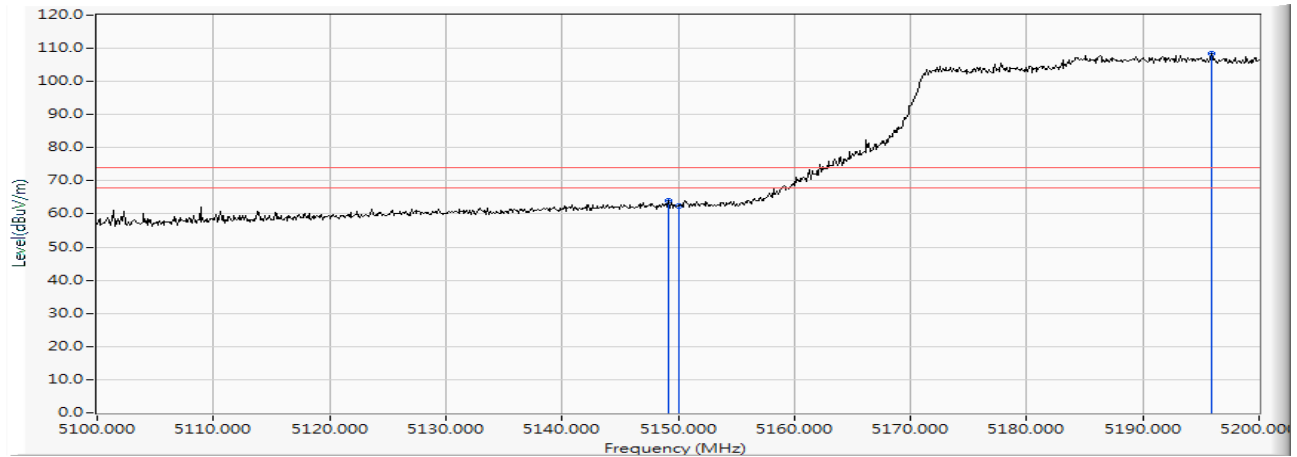


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5149.200	15.302	48.729	64.032	-9.968	74.000	PEAK
2		5150.000	15.307	47.144	62.451	-11.549	74.000	PEAK
3	*	5195.900	15.457	93.098	108.555	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 8: SISO A: Transmit (802.11ax-80BW_36Mbps)-Channel 42 (5210MHz)

Vertical

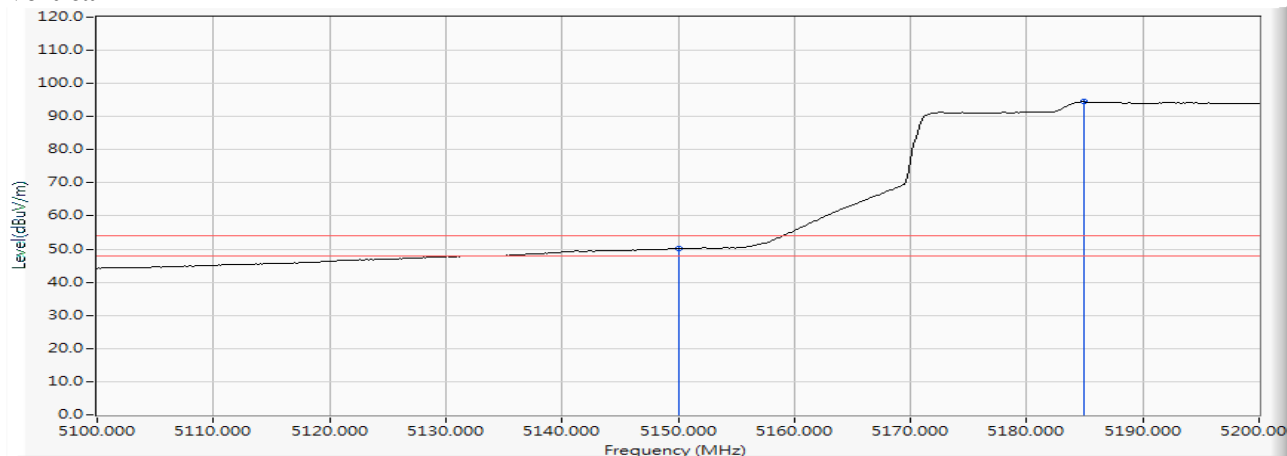


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	34.751	50.058	-3.942	54.000	AVERAGE
2	*	5184.928	15.415	79.029	94.443	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 8: SISO A: Transmit (802.11ax-80BW_36Mbps)-Channel 58 (5290MHz)

Horizontal

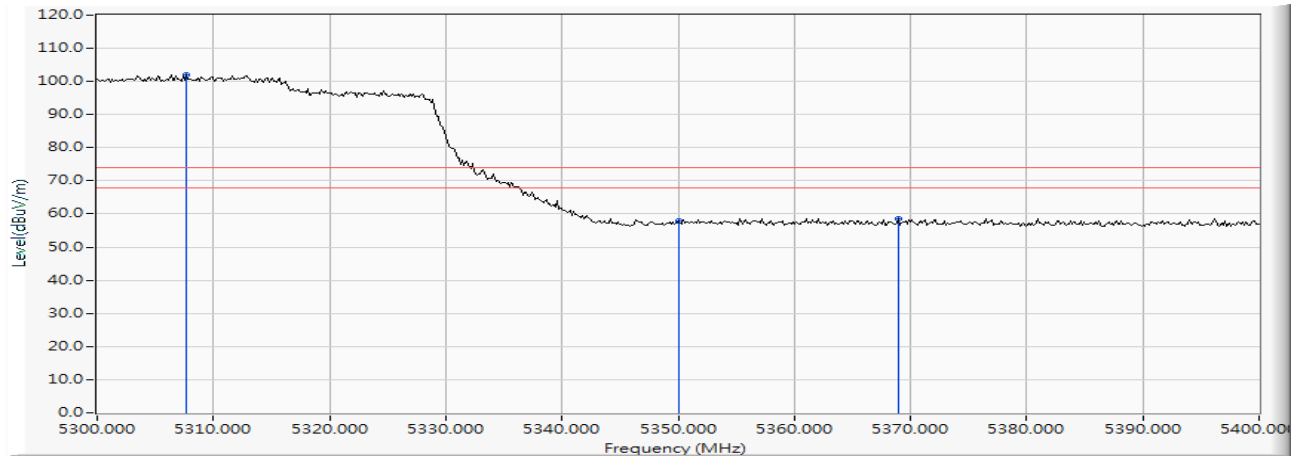


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5307.681	15.815	86.294	102.109	--	--	PEAK
2		5350.000	15.912	42.152	58.064	-15.936	74.000	PEAK
3		5368.986	15.971	42.699	58.670	-15.330	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 8: SISO A: Transmit (802.11ax-80BW_36Mbps)-Channel 58 (5290MHz)

Horizontal

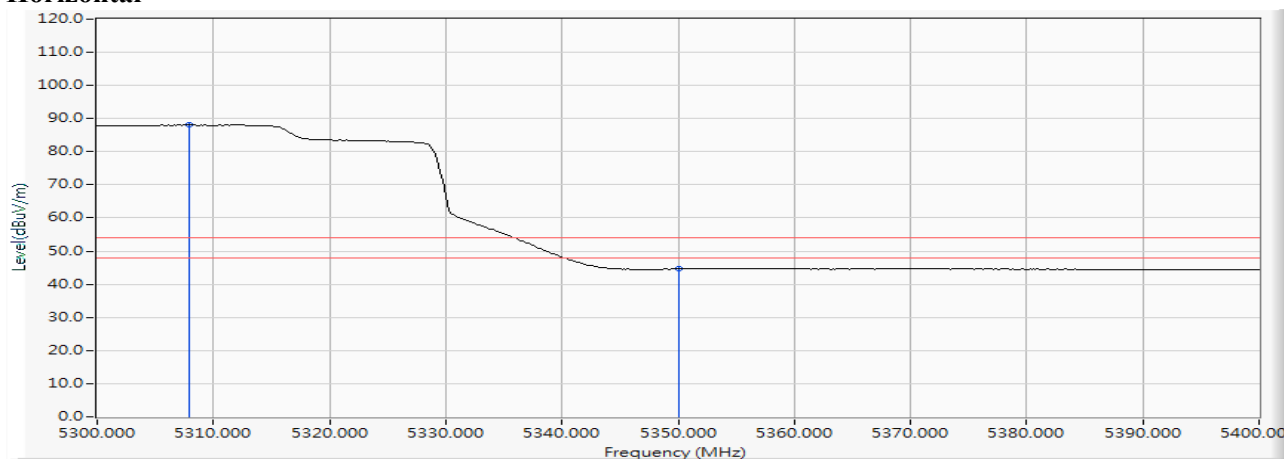


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5307.971	15.816	72.305	88.121	--	--	AVERAGE
2		5350.000	15.912	28.725	44.637	-9.363	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 8: SISO A: Transmit (802.11ax-80BW_36Mbps)-Channel 58 (5290MHz)

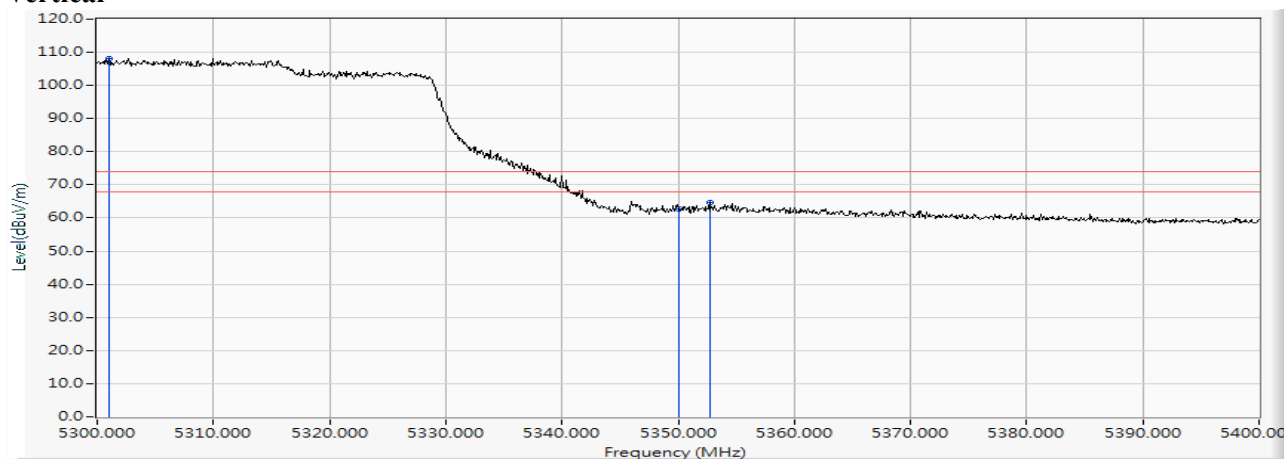
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5301.000	15.799	92.219	108.018	--	--	PEAK
2		5350.000	15.912	46.879	62.791	-11.209	74.000	PEAK
3		5352.700	15.920	48.636	64.557	-9.443	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 8: SISO A: Transmit (802.11ax-80BW_36Mbps)-Channel 58 (5290MHz)

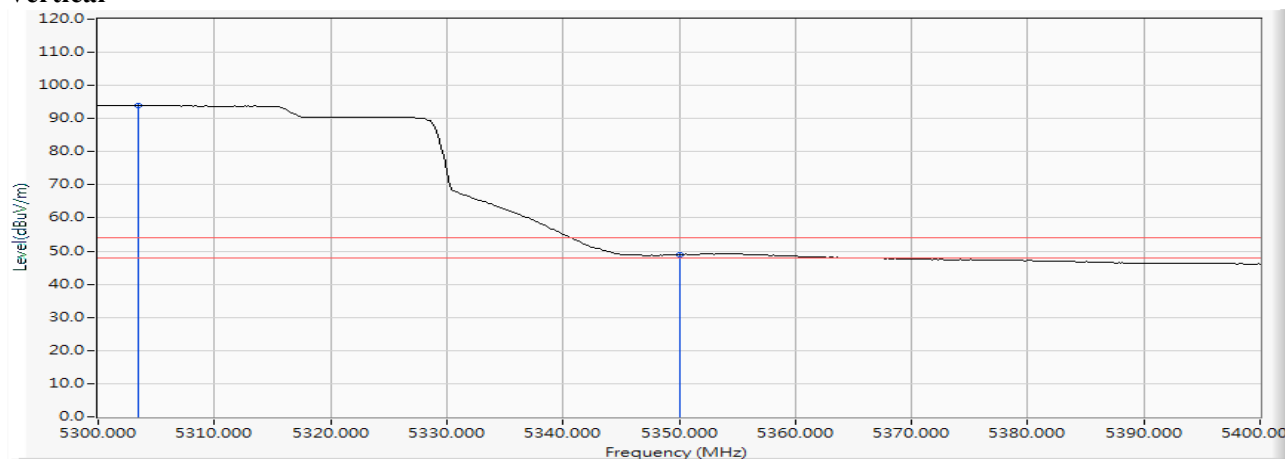Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5303.478	15.805	78.193	93.998	--	--	AVERAGE
2		5350.000	15.912	33.030	48.942	-5.058	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 8: SISO A: Transmit (802.11ax-80BW_36Mbps)-Channel 106 (5530MHz)

Horizontal

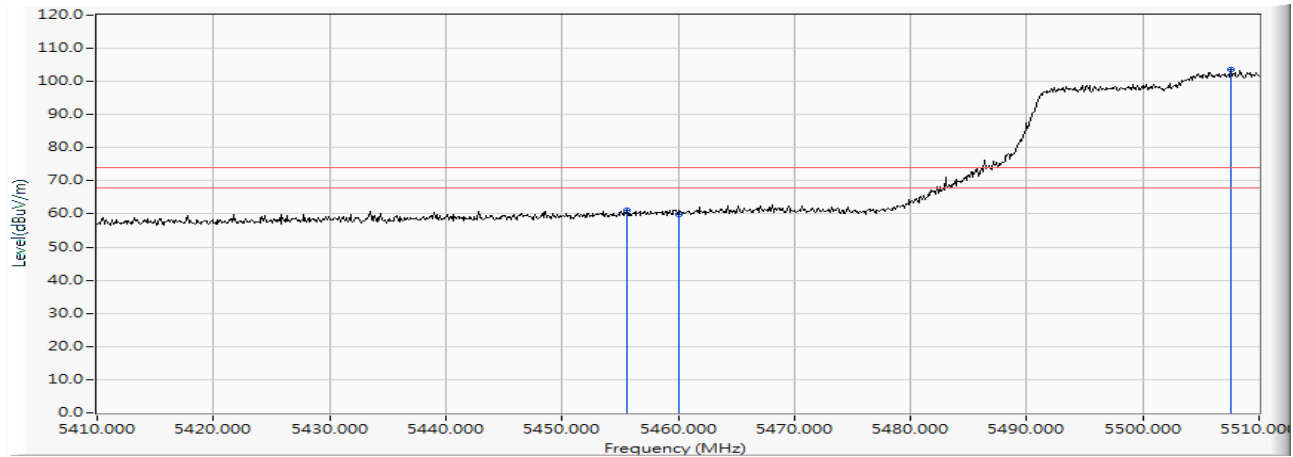


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5455.600	16.175	44.964	61.140	-12.860	74.000	PEAK
2		5460.000	16.185	43.773	59.958	-14.042	74.000	PEAK
3	*	5507.600	16.274	87.279	103.553	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 8: SISO A: Transmit (802.11ax-80BW_36Mbps)-Channel 106 (5530MHz)

Horizontal

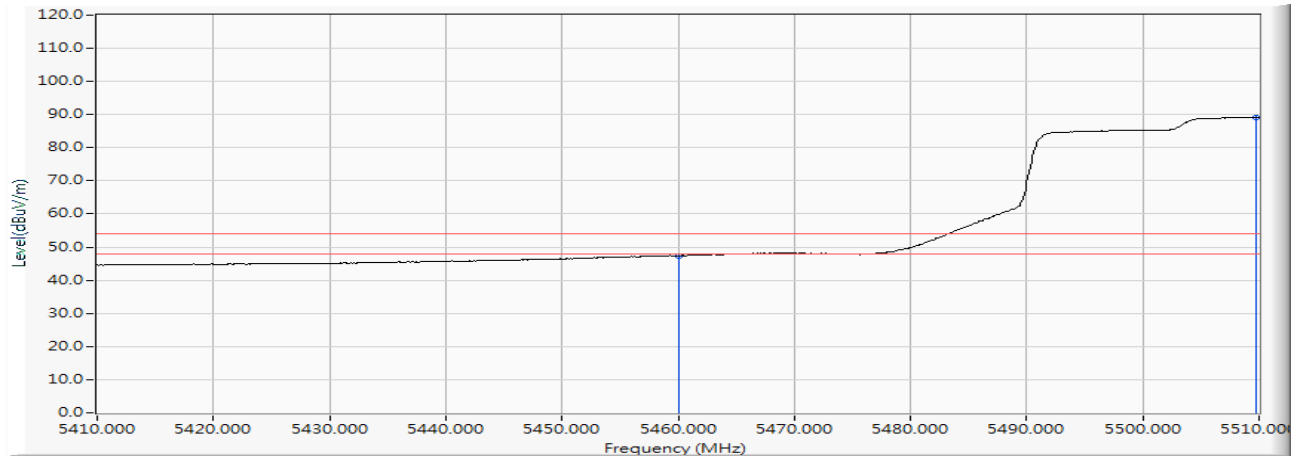


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5460.000	16.185	31.237	47.422	-6.578	54.000	AVERAGE
2	*	5509.800	16.275	72.958	89.233	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 8: SISO A: Transmit (802.11ax-80BW_36Mbps)-Channel 106 (5530MHz)

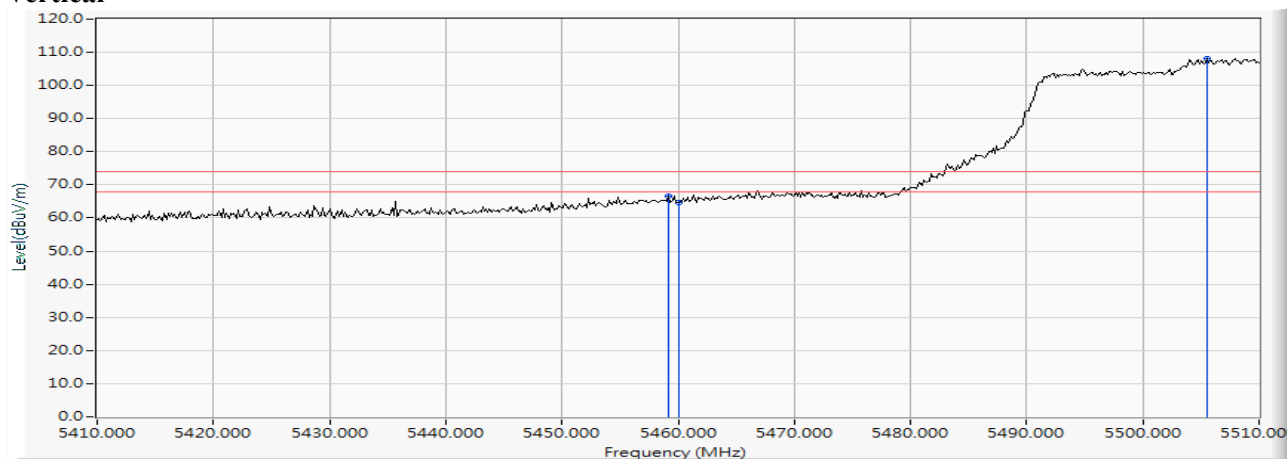
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5459.130	16.183	50.275	66.458	-7.542	74.000	PEAK
2		5460.000	16.185	48.500	64.685	-9.315	74.000	PEAK
3	*	5505.507	16.273	91.900	108.173	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 8: SISO A: Transmit (802.11ax-80BW_36Mbps)-Channel 106 (5530MHz)

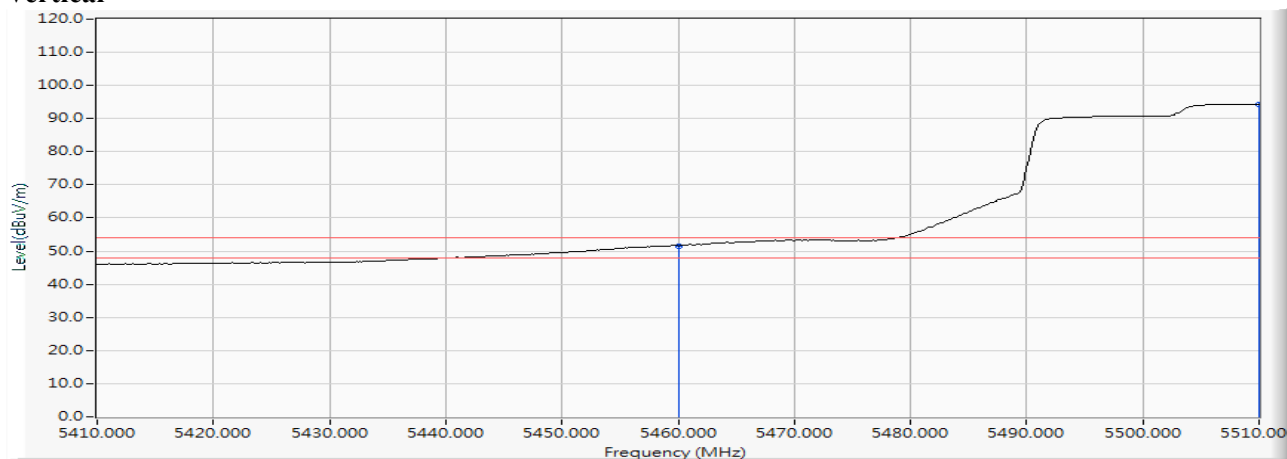Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5460.000	16.185	35.419	51.604	-2.396	54.000	AVERAGE
2	*	5510.000	16.275	78.109	94.384	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 8: SISO A: Transmit (802.11ax-80BW_36Mbps)-Channel 106 (5530MHz)

Horizontal

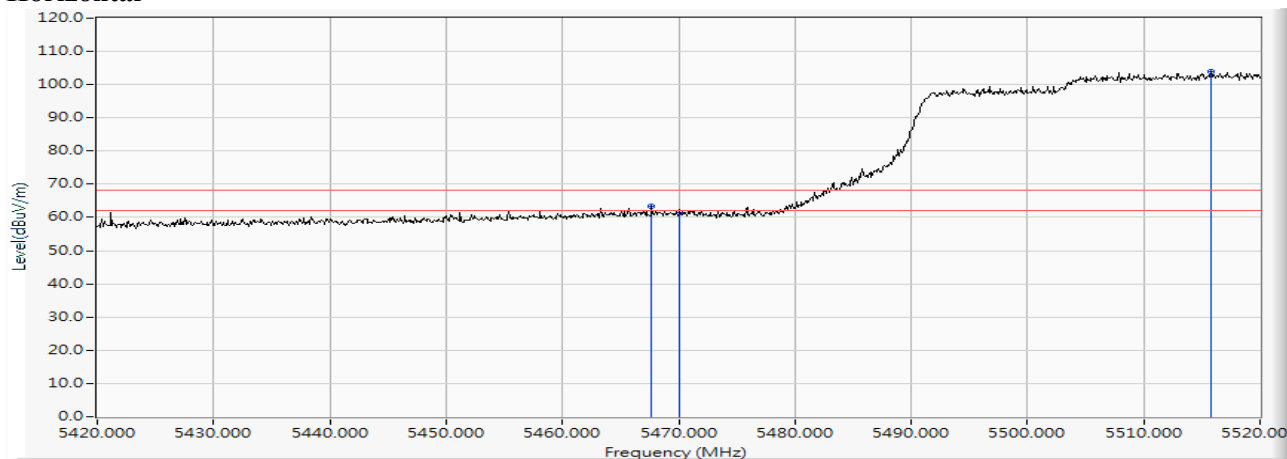

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5467.700	16.196	47.217	63.413	-4.807	68.220	PEAK
2		5470.000	16.200	45.393	61.593	-6.627	68.220	PEAK
3	*	5515.800	16.285	87.771	104.056	--	--	PEAK


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 8: SISO A: Transmit (802.11ax-80BW_36Mbps)-Channel 106 (5530MHz)

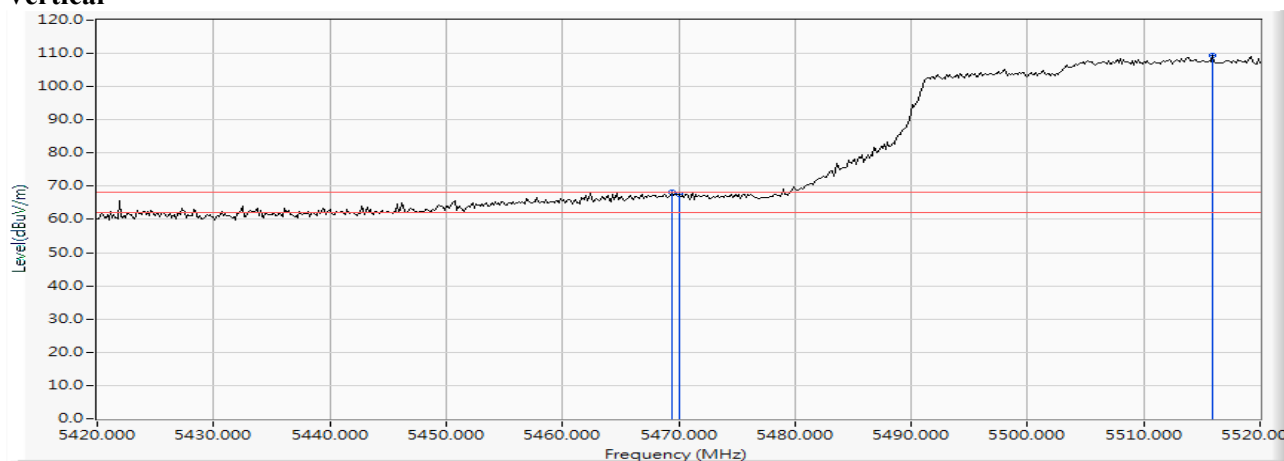Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5469.420	16.199	51.950	68.149	-0.071	68.220	PEAK
2		5470.000	16.200	51.517	67.717	-0.503	68.220	PEAK
3	*	5515.942	16.285	93.033	109.318	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 8: SISO A: Transmit (802.11ax-80BW_36Mbps)-Channel 155 (5775MHz)


Horizontal

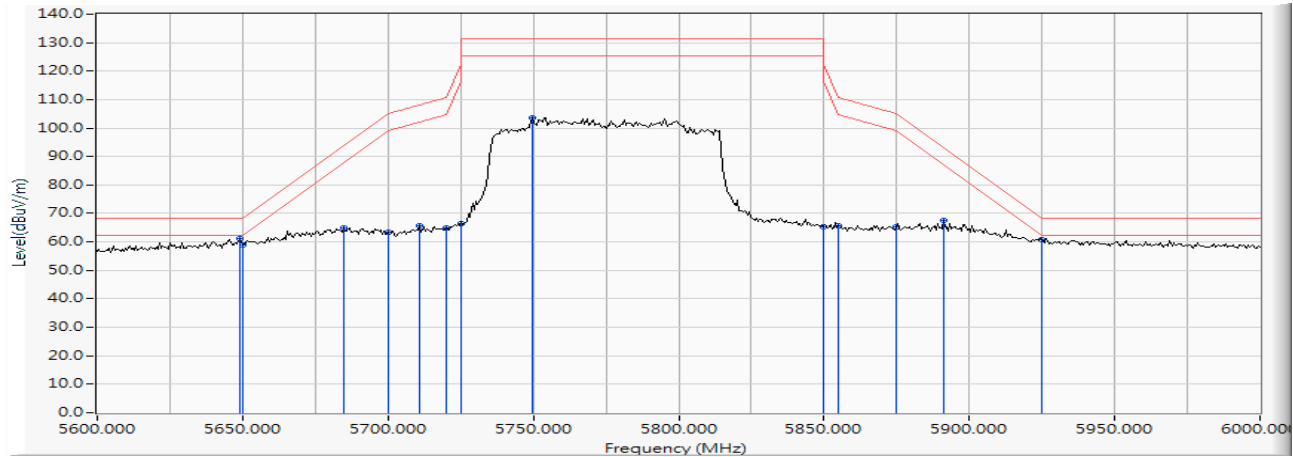

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5649.275	16.444	44.642	61.087	-7.133	68.220	PEAK
2		5650.000	16.447	42.661	59.108	-9.112	68.220	PEAK
3		5684.638	16.482	48.590	65.073	-28.765	93.838	PEAK
4		5700.000	16.502	46.789	63.291	-41.909	105.200	PEAK
5		5710.725	16.517	49.228	65.745	-42.458	108.203	PEAK
6		5720.000	16.535	48.326	64.861	-45.939	110.800	PEAK
7		5725.000	16.544	50.043	66.587	-55.613	122.200	PEAK
8	*	5749.565	16.567	87.072	103.639	--	--	PEAK
9		5850.000	16.748	48.711	65.459	-56.741	122.200	PEAK
10		5855.000	16.758	48.964	65.722	-45.078	110.800	PEAK
11		5875.000	16.807	48.604	65.412	-39.788	105.200	PEAK
12		5891.014	16.849	50.805	67.654	-25.696	93.350	PEAK
13		5925.000	16.920	43.845	60.765	-7.435	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 8: SISO A: Transmit (802.11ax-80BW_36Mbps)-Channel 155 (5775MHz)


Vertical

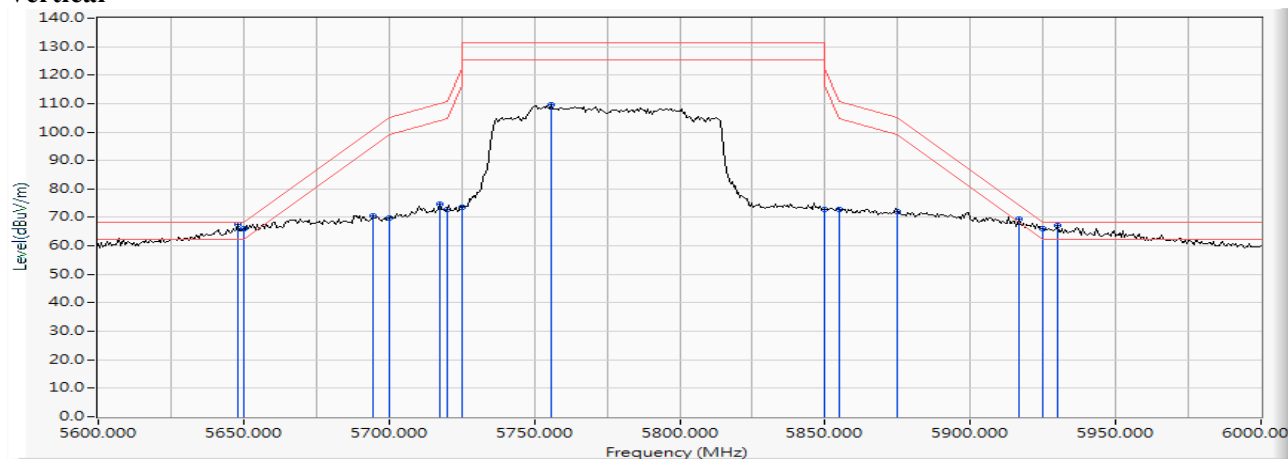

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5648.116	16.442	50.980	67.422	-0.798	68.220	PEAK
2		5650.000	16.447	49.602	66.049	-2.171	68.220	PEAK
3		5694.493	16.494	53.973	70.468	-30.659	101.127	PEAK
4		5700.000	16.502	53.187	69.689	-35.511	105.200	PEAK
5		5717.681	16.530	58.071	74.602	-35.549	110.151	PEAK
6		5720.000	16.535	56.310	72.845	-37.955	110.800	PEAK
7		5725.000	16.544	56.979	73.523	-48.677	122.200	PEAK
8	*	5755.942	16.577	93.094	109.671	--	--	PEAK
9		5850.000	16.748	56.181	72.929	-49.271	122.200	PEAK
10		5855.000	16.758	56.200	72.958	-37.842	110.800	PEAK
11		5875.000	16.807	55.246	72.054	-33.146	105.200	PEAK
12		5916.522	16.897	52.705	69.602	-4.872	74.474	PEAK
13		5925.000	16.920	48.996	65.916	-2.284	68.200	PEAK
14		5929.855	16.925	50.093	67.018	-1.182	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 9: SISO A: Transmit (802.11ax-160BW_72.1Mbps)-Channel 50 (5250MHz)

Horizontal

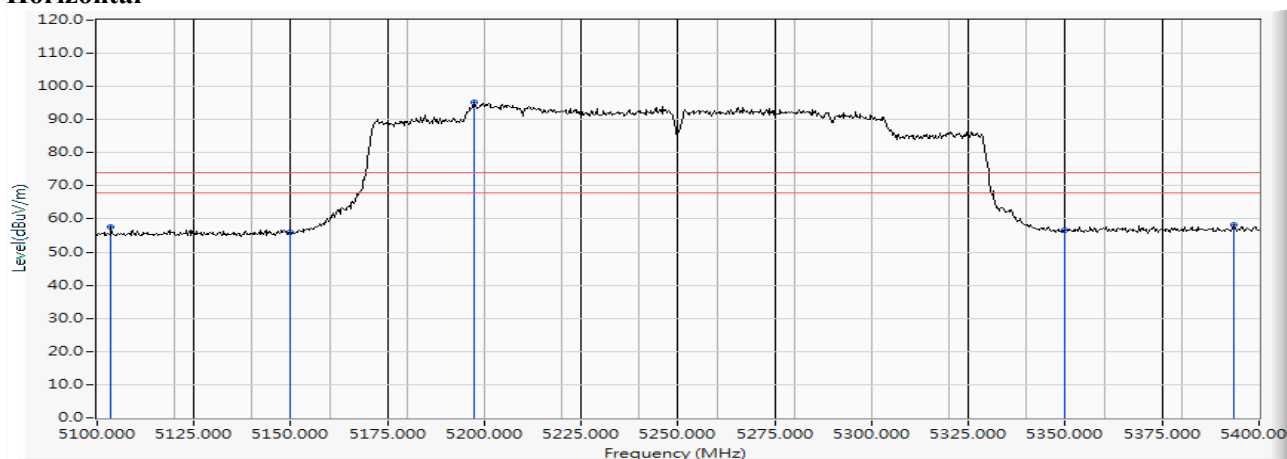


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5103.600	15.097	42.638	57.736	-16.264	74.000	PEAK
2		5150.000	15.307	40.536	55.843	-18.157	74.000	PEAK
3	*	5197.200	15.462	79.733	95.195	--	--	PEAK
4		5350.000	15.912	40.767	56.679	-17.321	74.000	PEAK
5		5393.400	16.021	42.184	58.206	-15.794	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 9: SISO A: Transmit (802.11ax-160BW_72.1Mbps)-Channel 50 (5250MHz)

Horizontal

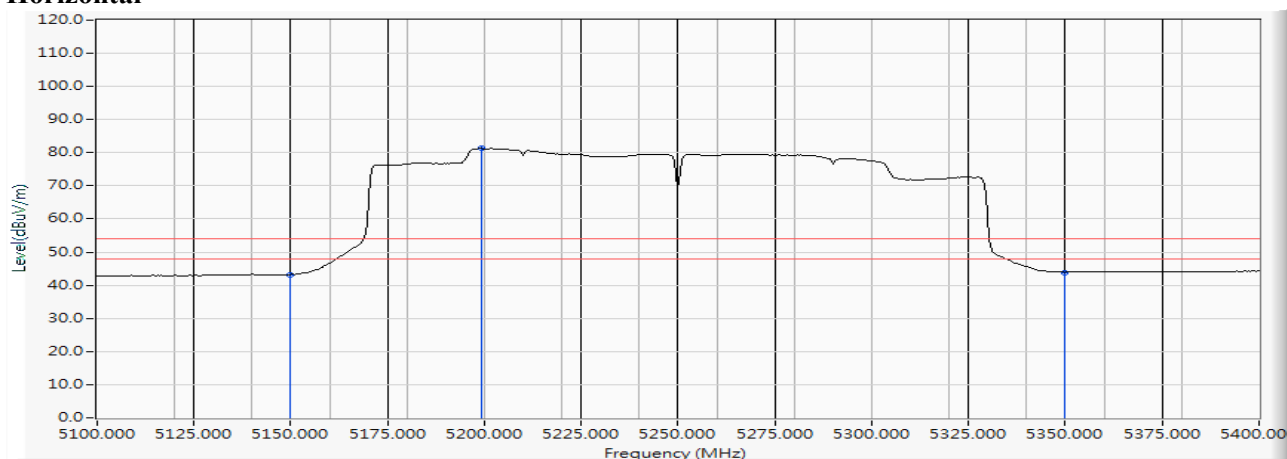


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	27.797	43.104	-10.896	54.000	AVERAGE
2	*	5199.130	15.469	65.806	81.276	--	--	AVERAGE
3		5350.000	15.912	27.977	43.889	-10.111	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 9: SISO A: Transmit (802.11ax-160BW_72.1Mbps)-Channel 50 (5250MHz)

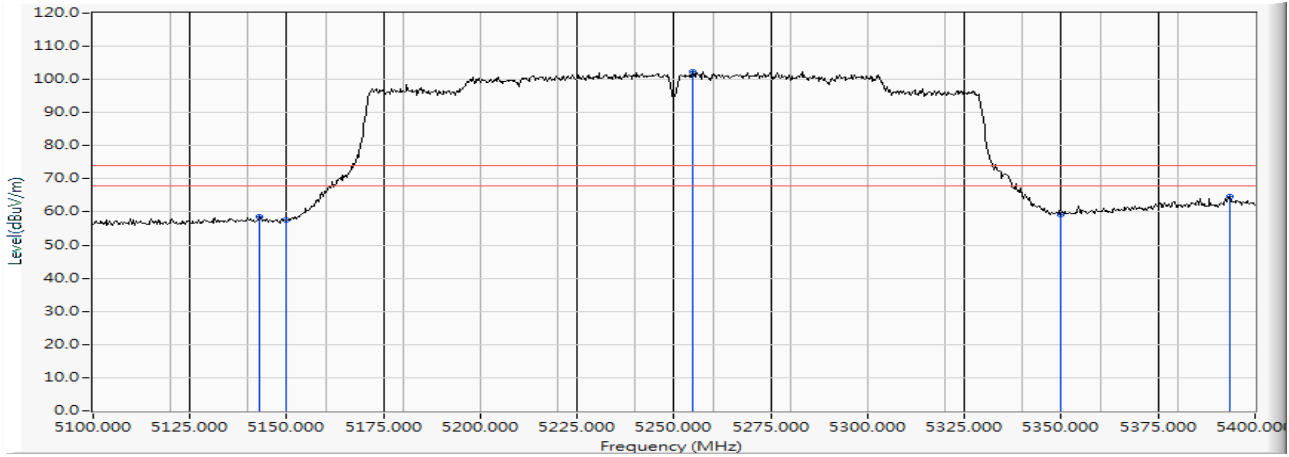Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5142.900	15.267	43.252	58.518	-15.482	74.000	PEAK
2		5150.000	15.307	42.121	57.428	-16.572	74.000	PEAK
3	*	5254.800	15.691	86.623	102.313	--	--	PEAK
4		5350.000	15.912	43.436	59.348	-14.652	74.000	PEAK
5		5393.400	16.021	48.606	64.628	-9.372	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 9: SISO A: Transmit (802.11ax-160BW_72.1Mbps)-Channel 50 (5250MHz)

Vertical

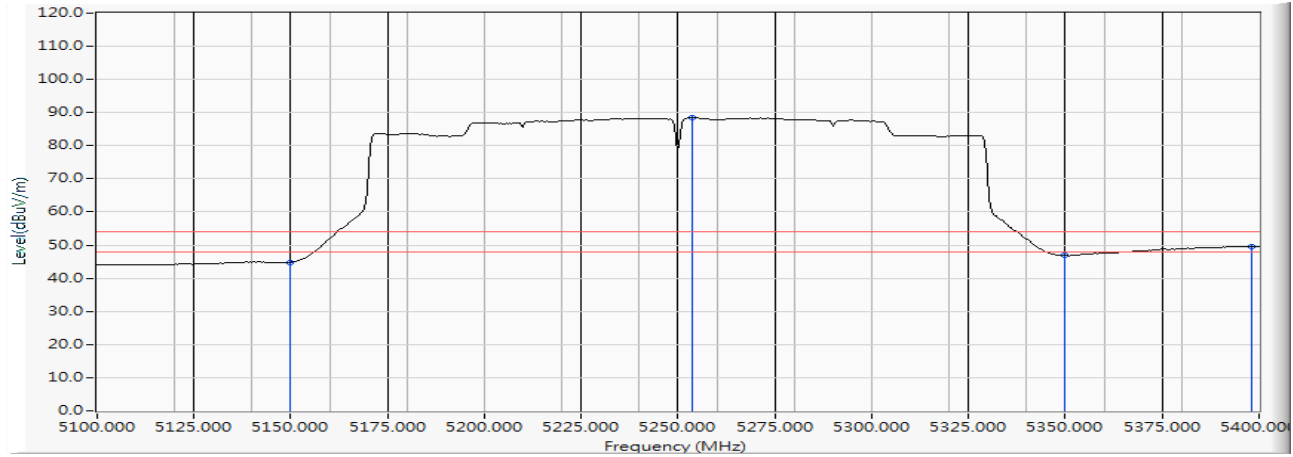


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	29.506	44.813	-9.187	54.000	AVERAGE
2	*	5253.478	15.686	72.743	88.429	--	--	AVERAGE
3		5350.000	15.912	30.925	46.837	-7.163	54.000	AVERAGE
4		5398.261	16.027	33.648	49.674	-4.326	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 9: SISO A: Transmit (802.11ax-160BW_72.1Mbps)-Channel 114 (5570MHz)

Horizontal

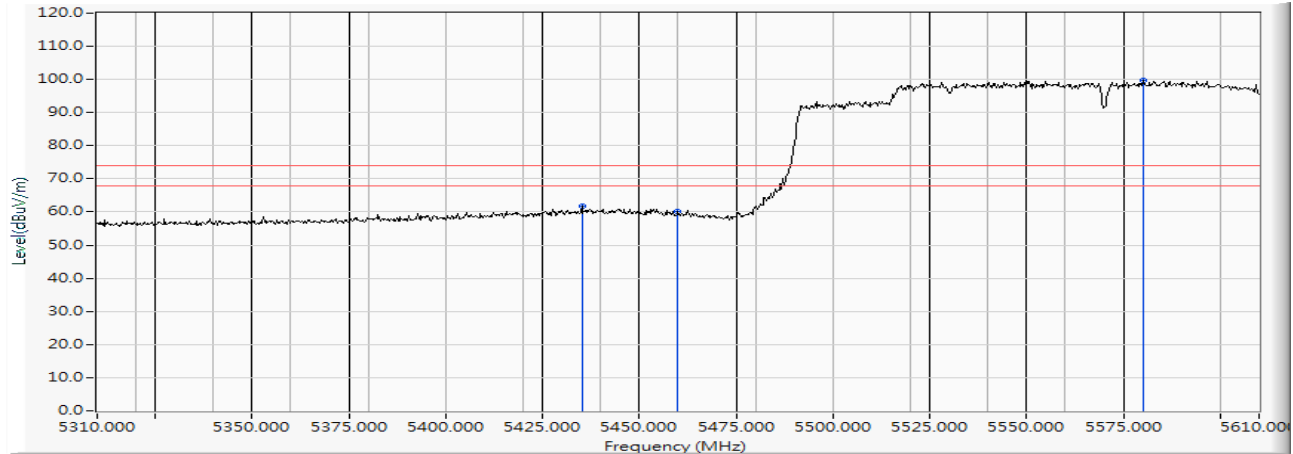


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5435.100	16.114	45.525	61.639	-12.361	74.000	PEAK
2		5460.000	16.185	44.008	60.193	-13.807	74.000	PEAK
3	*	5580.000	16.363	83.267	99.630	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 9: SISO A: Transmit (802.11ax-160BW_72.1Mbps)-Channel 114 (5570MHz)

Horizontal

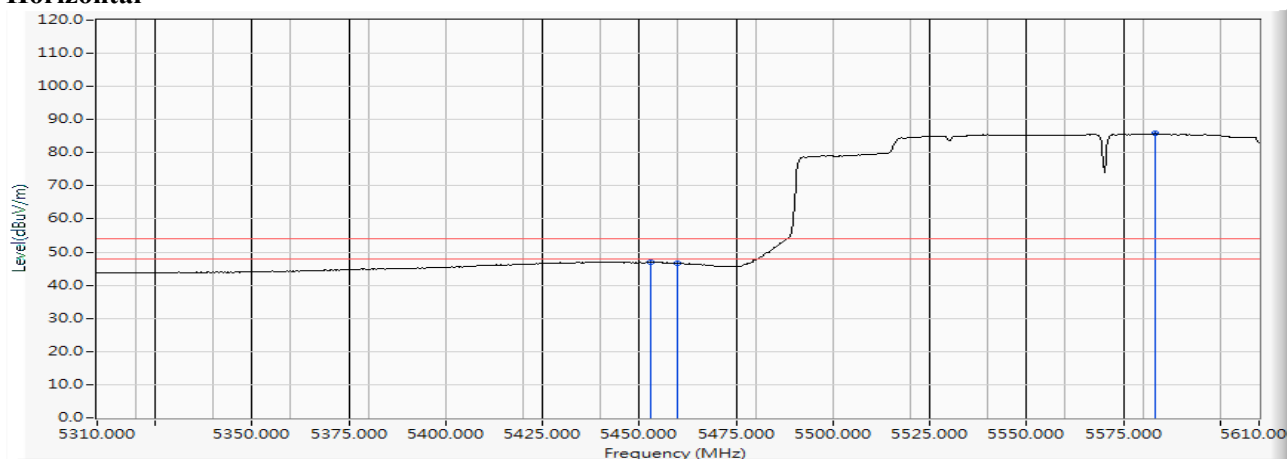


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5452.800	16.167	30.804	46.970	-7.030	54.000	AVERAGE
2		5460.000	16.185	30.468	46.653	-7.347	54.000	AVERAGE
3	*	5583.000	16.370	69.373	85.743	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 9: SISO A: Transmit (802.11ax-160BW_72.1Mbps)-Channel 114 (5570MHz)

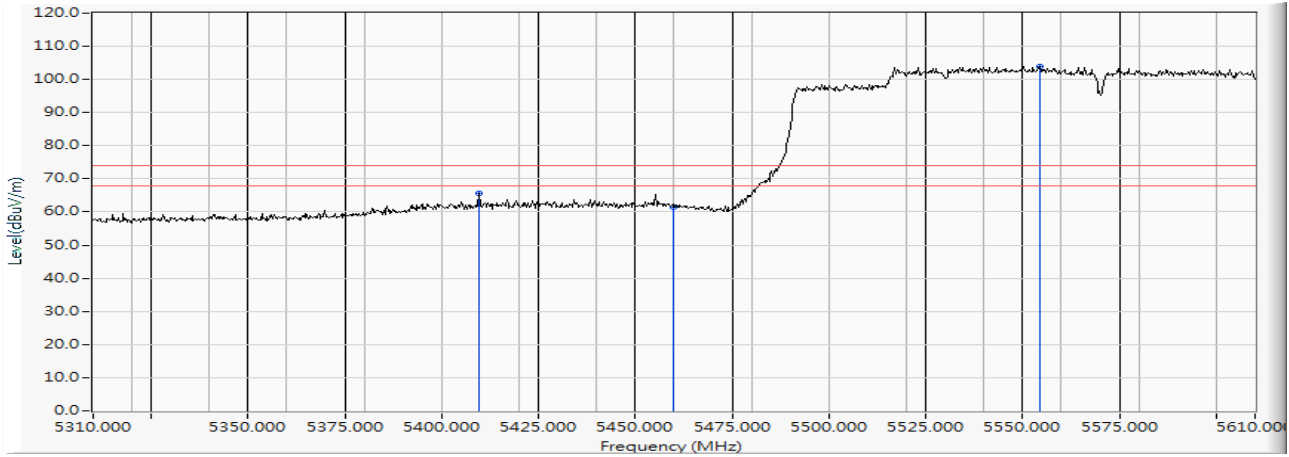
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5409.600	16.052	49.638	65.689	-8.311	74.000	PEAK
2		5460.000	16.185	45.233	61.418	-12.582	74.000	PEAK
3	*	5554.500	16.324	87.660	103.985	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 9: SISO A: Transmit (802.11ax-160BW_72.1Mbps)-Channel 114 (5570MHz)

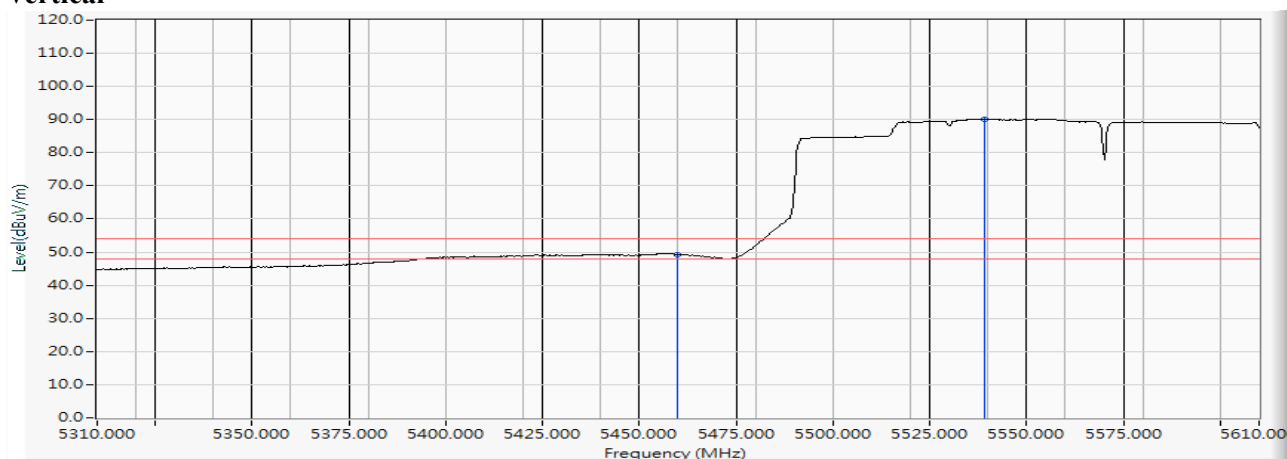Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5460.000	16.185	33.163	49.348	-4.652	54.000	AVERAGE
2	*	5539.200	16.317	73.917	90.235	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 9: SISO A: Transmit (802.11ax-160BW_72.1Mbps)-Channel 114 (5570MHz)


Horizontal

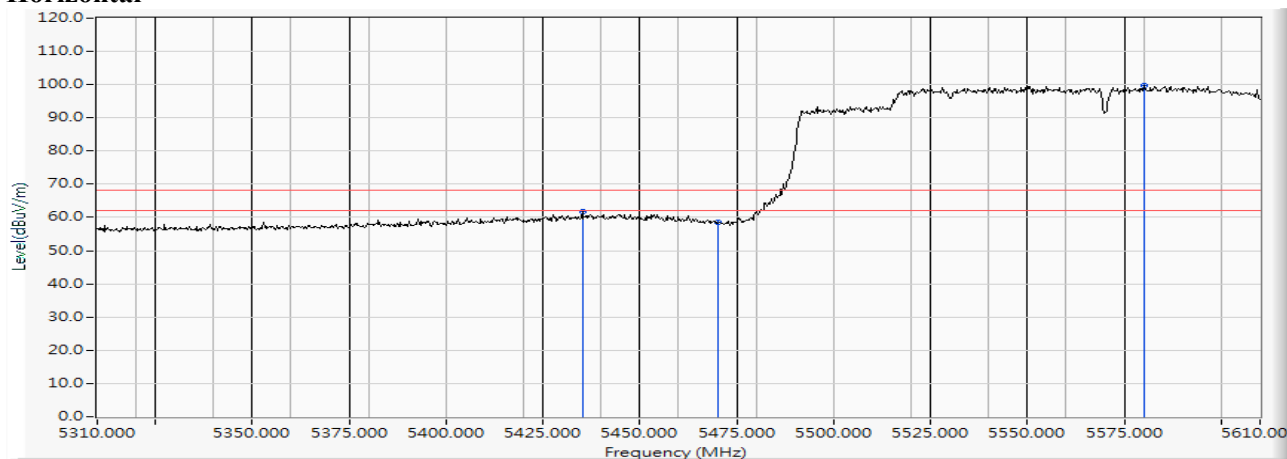

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5435.100	16.114	45.525	61.639	-6.581	68.220	PEAK
2		5470.000	16.200	42.204	58.404	-9.816	68.220	PEAK
3	*	5580.000	16.363	83.267	99.630	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/12
 Test Mode : Mode 9: SISO A: Transmit (802.11ax-160BW_72.1Mbps)-Channel 114 (5570MHz)


Vertical

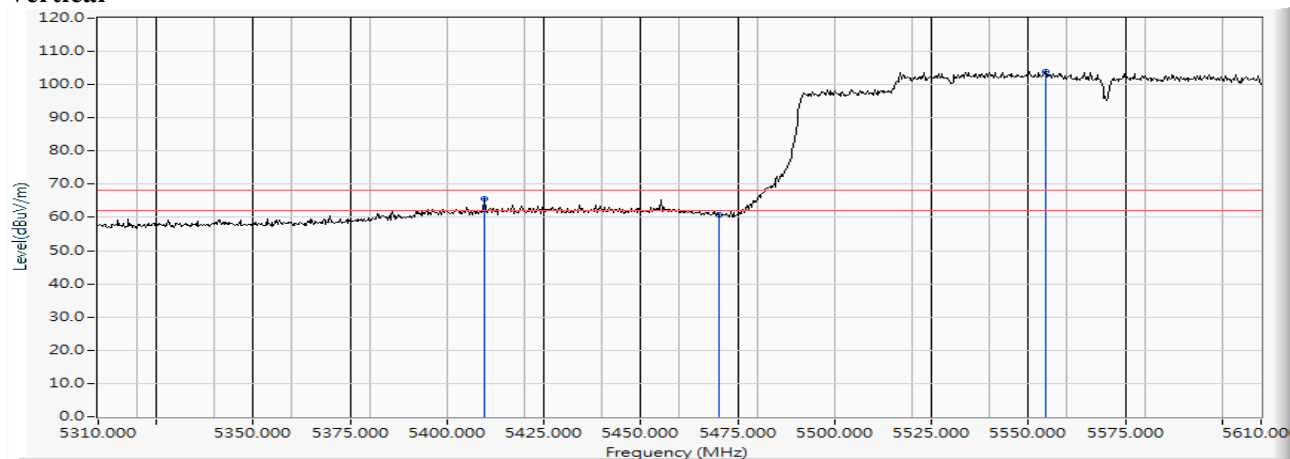

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5409.600	16.052	49.638	65.689	-2.531	68.220	PEAK
2		5470.000	16.200	44.669	60.869	-7.351	68.220	PEAK
3	*	5554.500	16.324	87.660	103.985	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps)-Channel 36 (5180MHz)

Horizontal

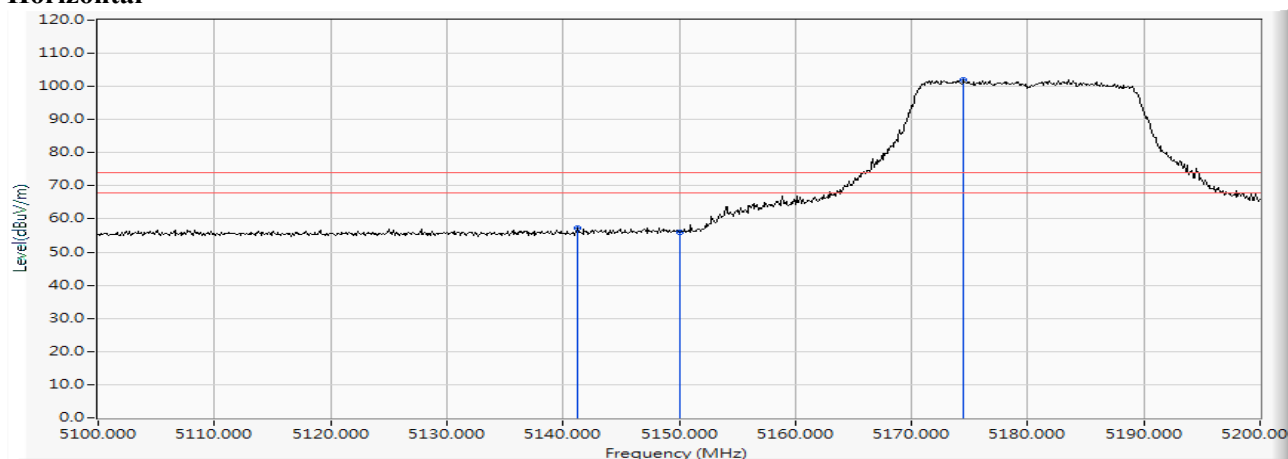


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5141.300	15.257	42.032	57.290	-16.710	74.000	PEAK
2		5150.000	15.307	40.744	56.051	-17.949	74.000	PEAK
3	*	5174.500	15.368	86.622	101.990	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps)-Channel 36 (5180MHz)

Horizontal

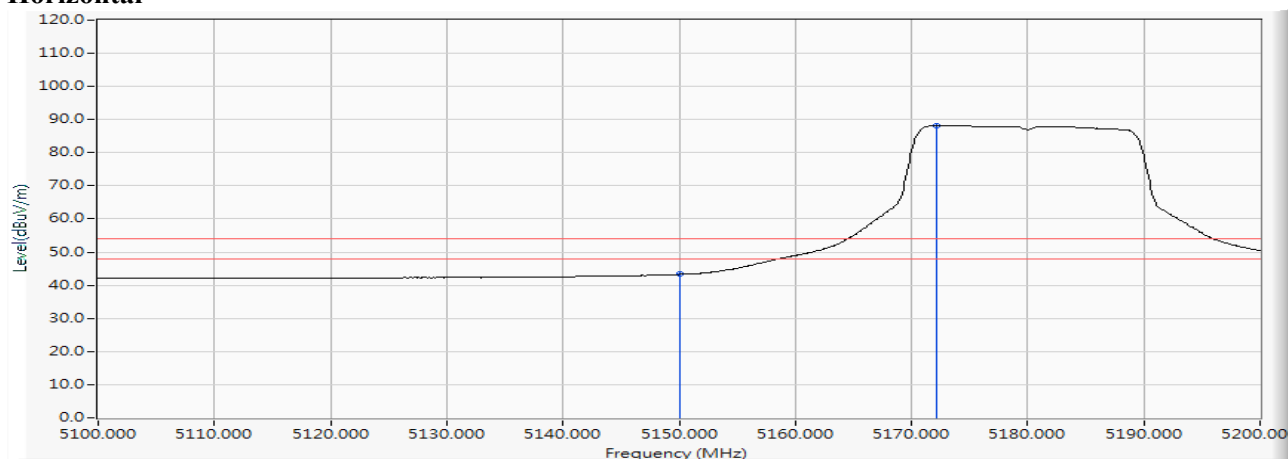


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	27.985	43.292	-10.708	54.000	AVERAGE
2	*	5172.100	15.357	72.842	88.199	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps)-Channel 36 (5180MHz)

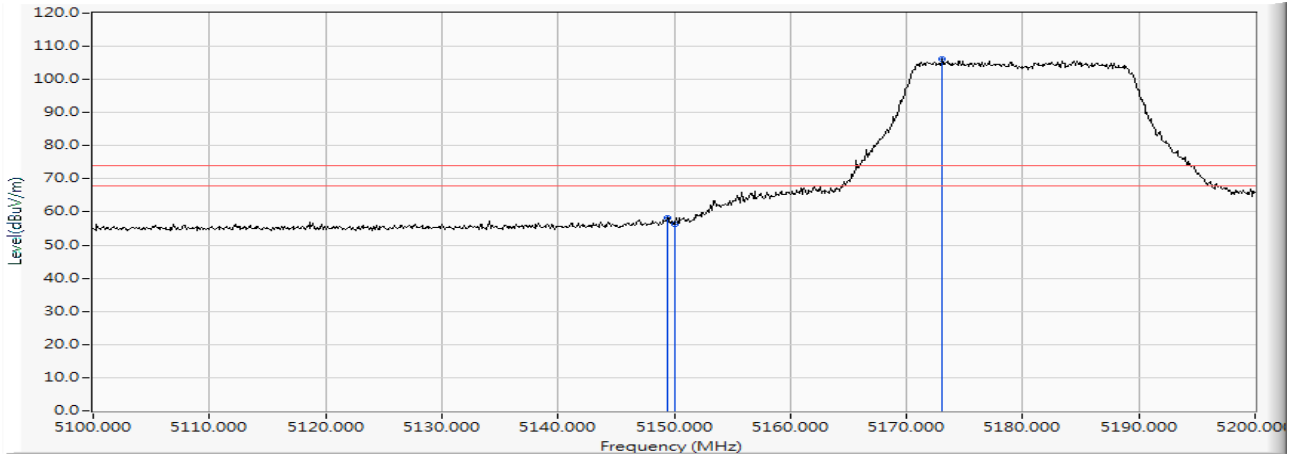
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5149.400	15.304	42.856	58.160	-15.840	74.000	PEAK
2		5150.000	15.307	40.988	56.295	-17.705	74.000	PEAK
3	*	5173.100	15.362	90.866	106.228	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps)-Channel 36 (5180MHz)

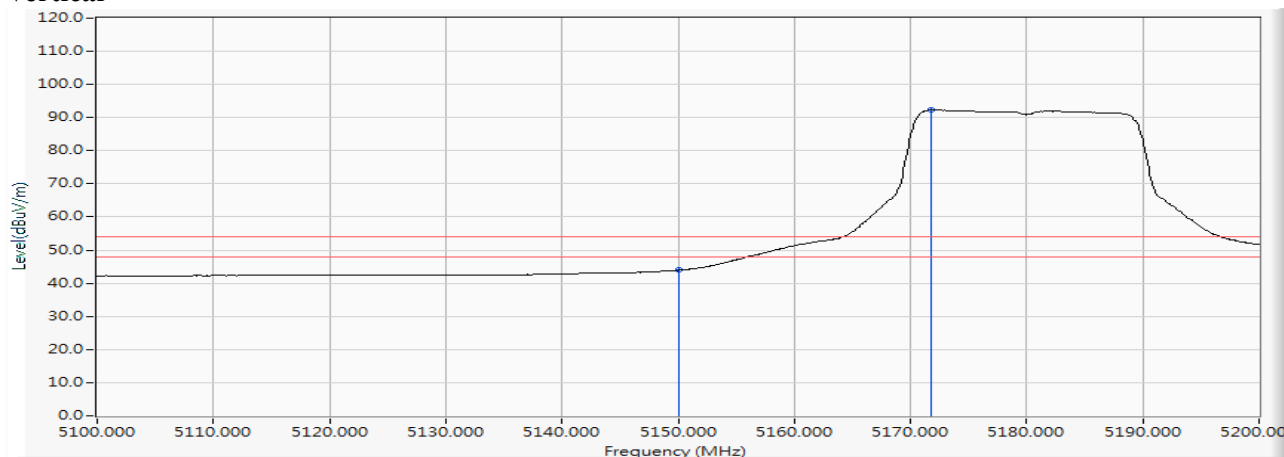Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	28.625	43.932	-10.068	54.000	AVERAGE
2	*	5171.800	15.356	76.919	92.275	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps)-Channel 64 (5320MHz)

Horizontal

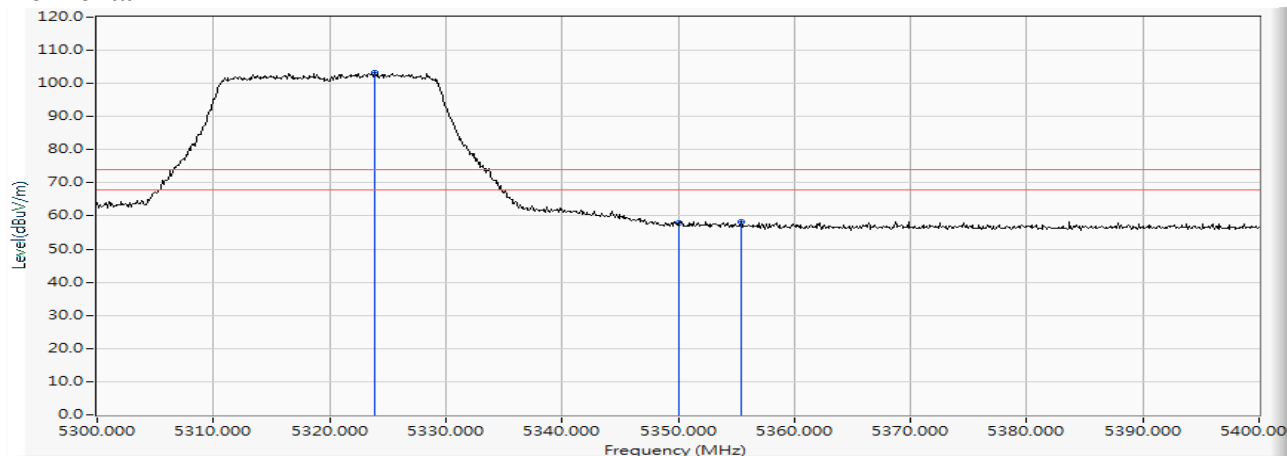


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5323.900	15.863	87.493	103.355	--	--	PEAK
2		5350.000	15.912	42.104	58.016	-15.984	74.000	PEAK
3		5355.400	15.929	42.417	58.346	-15.654	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps)-Channel 64 (5320MHz)

Horizontal

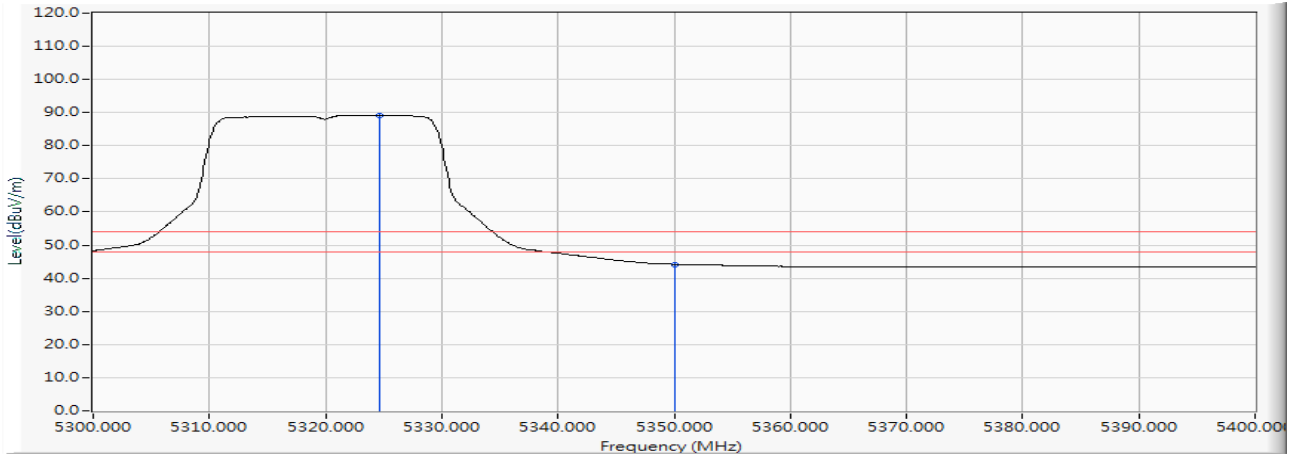


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5324.700	15.865	73.355	89.220	--	--	AVERAGE
2		5350.000	15.912	28.314	44.226	-9.774	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps)-Channel 64 (5320MHz)

Vertical

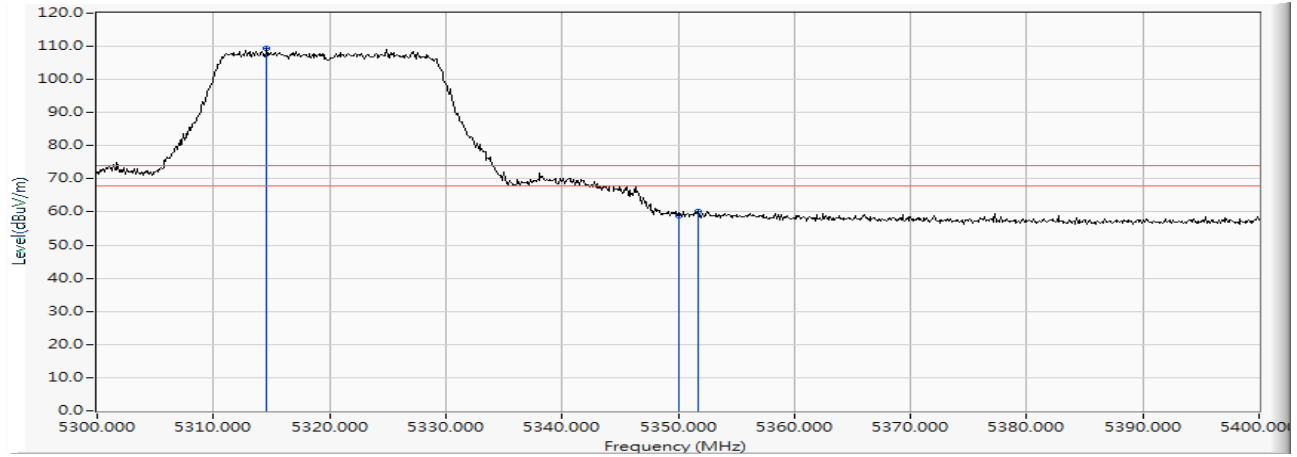


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5314.600	15.832	93.415	109.247	--	--	PEAK
2		5350.000	15.912	43.118	59.030	-14.970	74.000	PEAK
3		5351.700	15.917	44.309	60.227	-13.773	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps)-Channel 64 (5320MHz)

Vertical

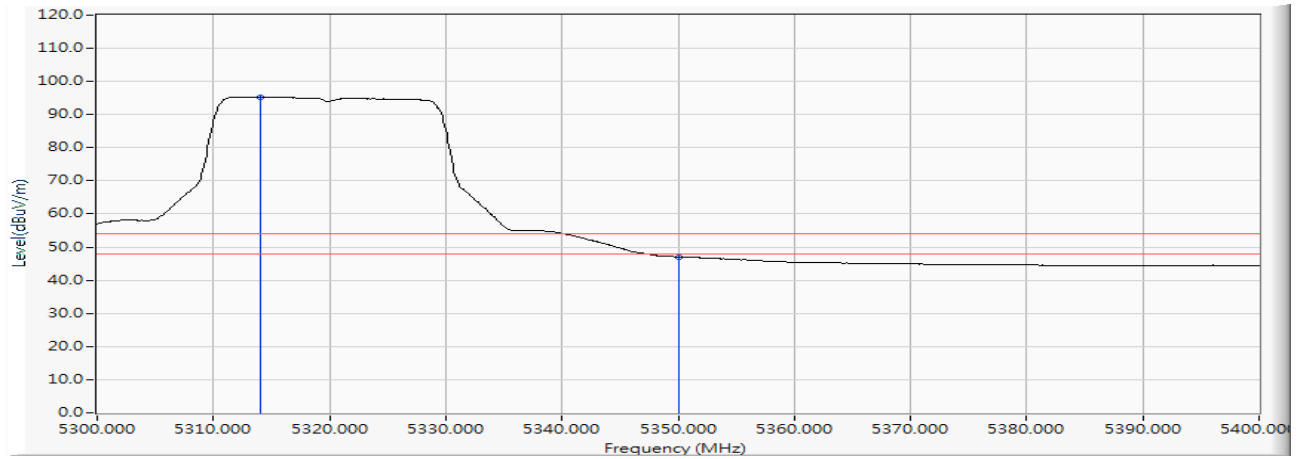


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5314.000	15.830	79.477	95.308	--	--	AVERAGE
2		5350.000	15.912	31.157	47.069	-6.931	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps)-Channel 100 (5500MHz)

Horizontal

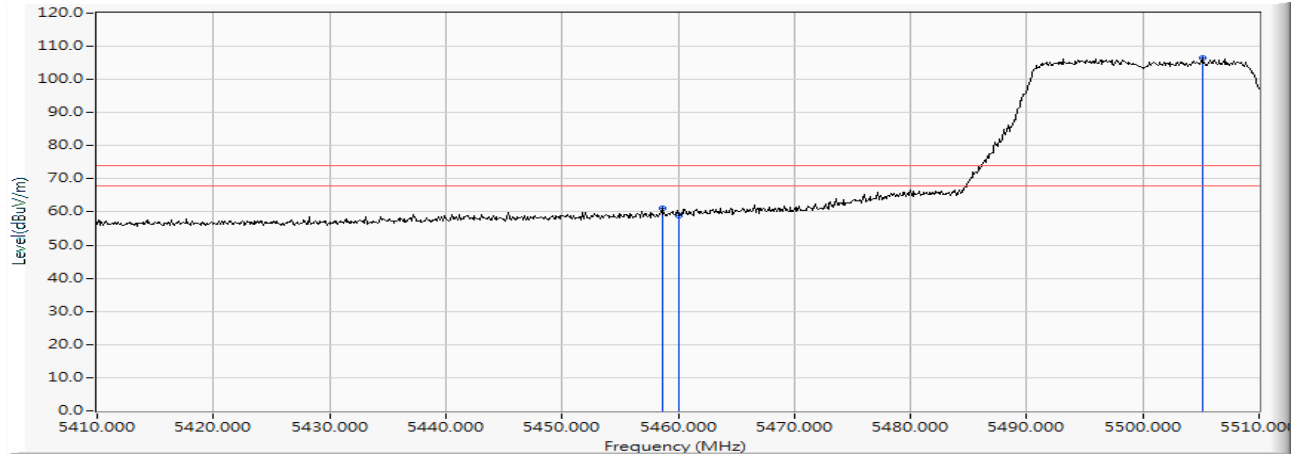


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5458.600	16.182	44.805	60.988	-13.012	74.000	PEAK
2		5460.000	16.185	42.790	58.975	-15.025	74.000	PEAK
3	*	5505.100	16.272	90.214	106.487	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps)-Channel 100 (5500MHz)

Horizontal

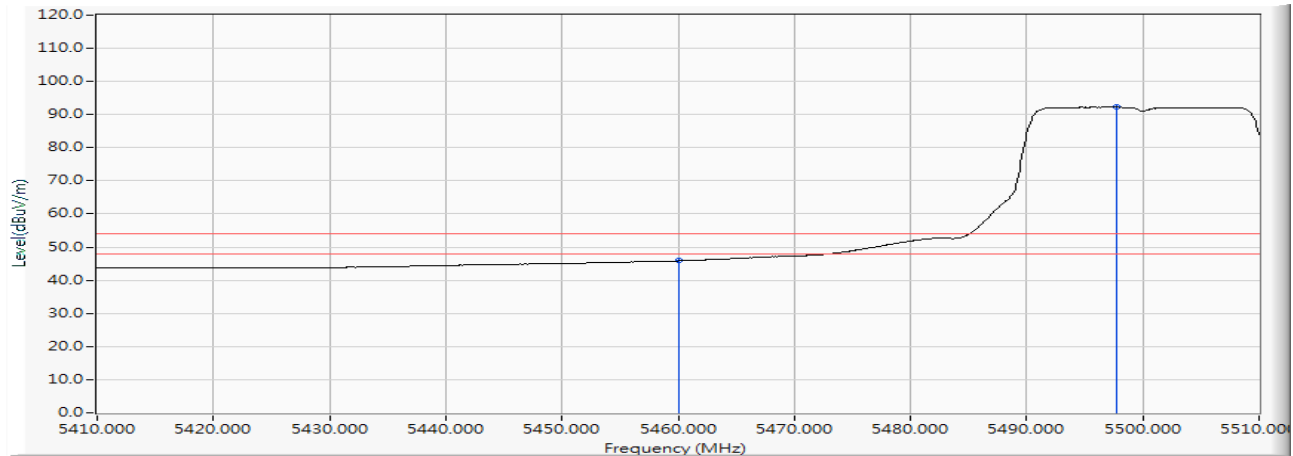


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5460.000	16.185	29.674	45.859	-8.141	54.000	AVERAGE
2	*	5497.800	16.266	75.957	92.224	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps)-Channel 100 (5500MHz)

Vertical

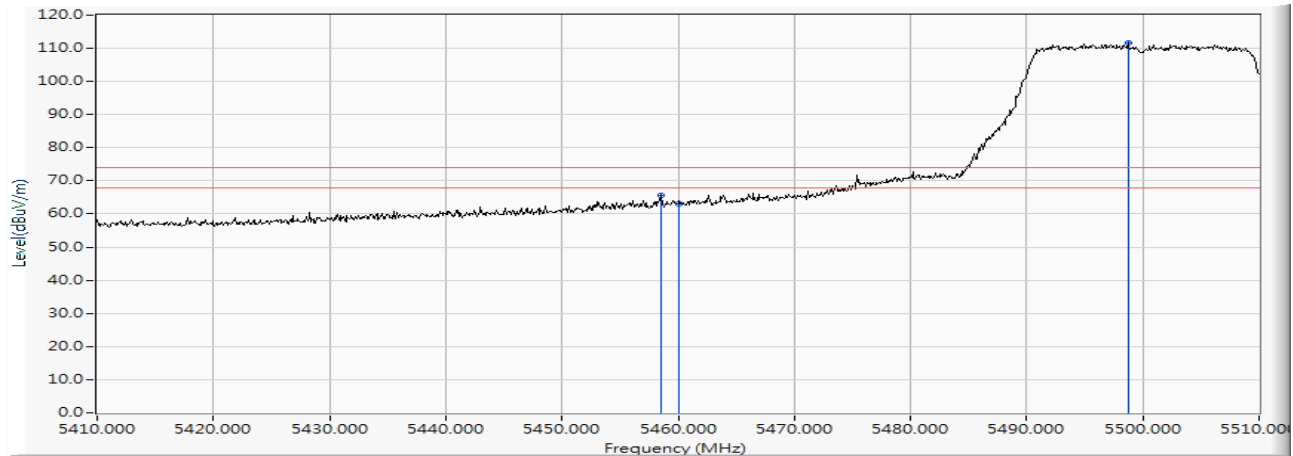


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5458.500	16.183	49.297	65.479	-8.521	74.000	PEAK
2		5460.000	16.185	46.796	62.981	-11.019	74.000	PEAK
3	*	5498.700	16.268	95.473	111.741	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps)-Channel 100 (5500MHz)

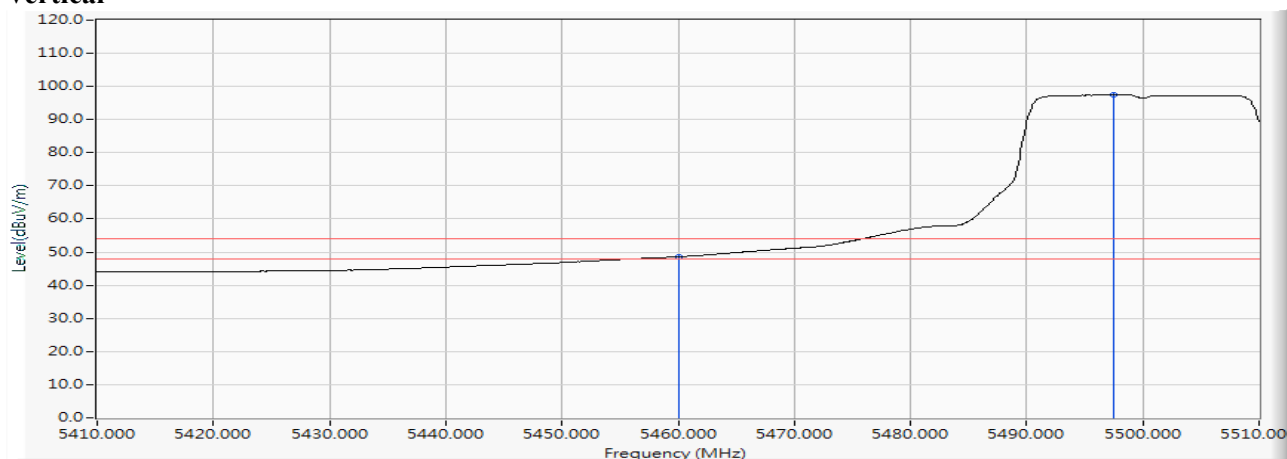Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5460.000	16.185	32.390	48.575	-5.425	54.000	AVERAGE
2	*	5497.500	16.267	81.186	97.453	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps)-Channel 100 (5500MHz)

Horizontal

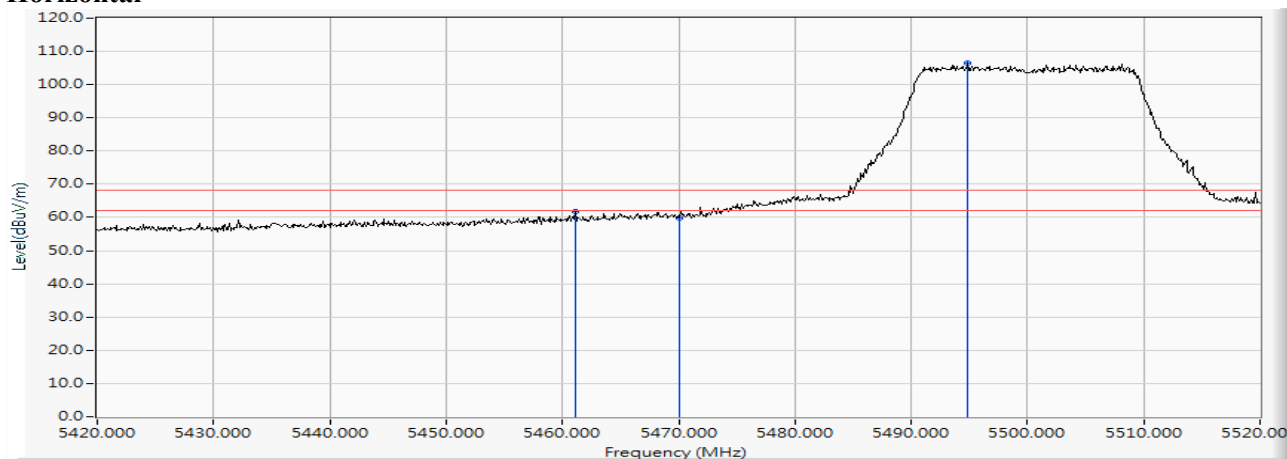

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5461.100	16.186	45.533	61.719	-6.501	68.220	PEAK
2		5470.000	16.200	43.570	59.770	-8.450	68.220	PEAK
3	*	5494.900	16.263	90.077	106.341	--	--	PEAK


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps)-Channel 100 (5500MHz)

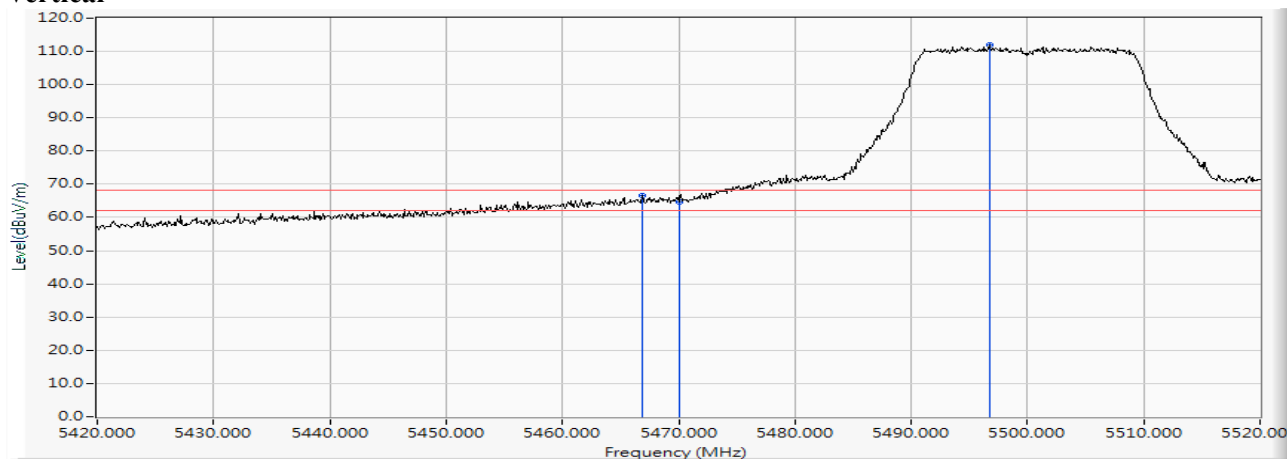Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5466.900	16.195	50.451	66.646	-1.574	68.220	PEAK
2		5470.000	16.200	48.571	64.771	-3.449	68.220	PEAK
3	*	5496.700	16.266	95.821	112.087	--	--	PEAK


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps)-Channel 140 (5700MHz)

Horizontal

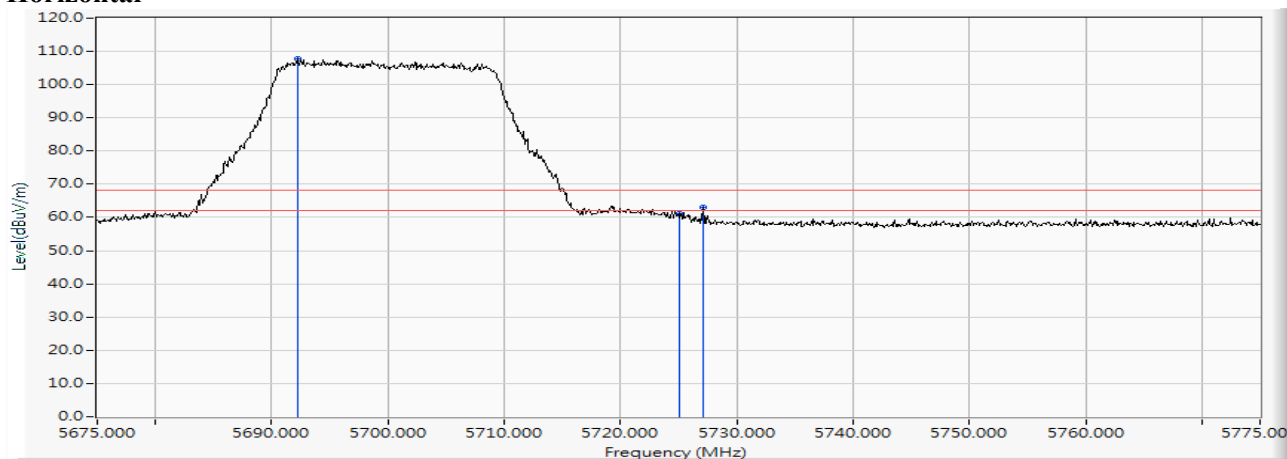

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5692.200	16.491	91.129	107.621	--	--	PEAK
2		5725.000	16.544	44.523	61.067	-7.153	68.220	PEAK
3		5727.100	16.547	46.491	63.038	-5.182	68.220	PEAK


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps)-Channel 140 (5700MHz)

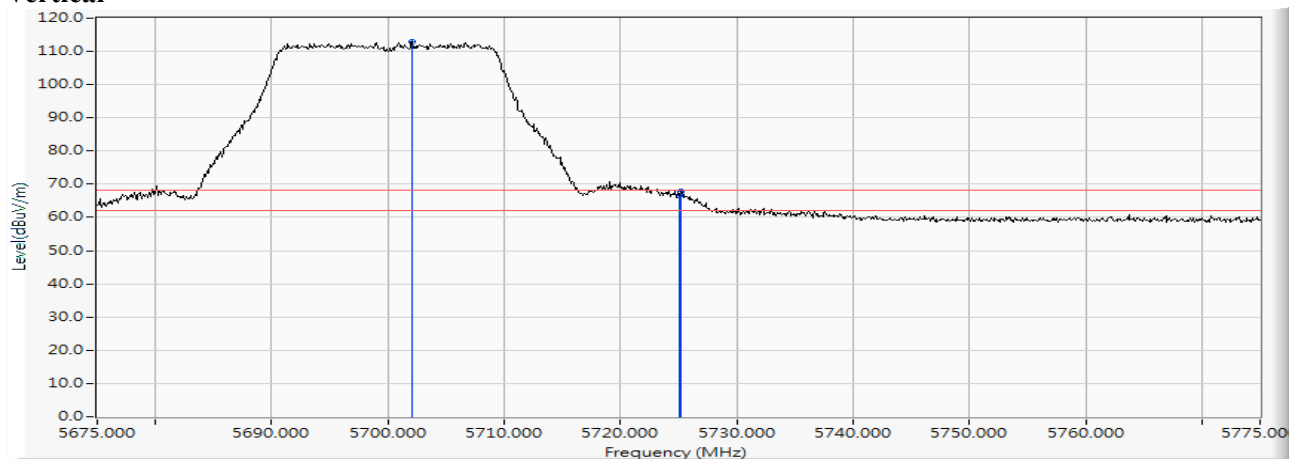Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5702.100	16.504	96.529	113.033	--	--	PEAK
2		5725.000	16.544	49.985	66.529	-1.691	68.220	PEAK
3		5725.200	16.544	51.285	67.830	-0.390	68.220	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps)-Channel 149 (5745MHz)


Horizontal

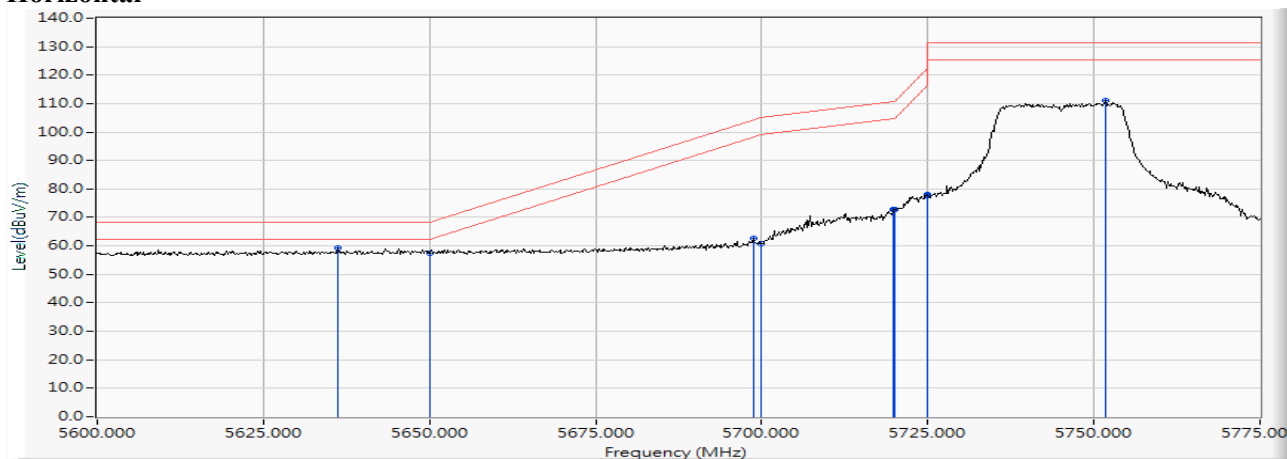

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5636.225	16.411	43.037	59.447	-8.773	68.220	PEAK
2		5650.000	16.447	40.803	57.250	-10.970	68.220	PEAK
3		5698.700	16.500	46.214	62.714	-41.525	104.239	PEAK
4		5700.000	16.502	44.126	60.628	-44.572	105.200	PEAK
5		5719.875	16.535	56.168	72.703	-38.062	110.765	PEAK
6		5720.000	16.535	56.147	72.682	-38.118	110.800	PEAK
7		5724.950	16.544	61.398	77.942	-44.144	122.086	PEAK
8		5725.000	16.544	61.207	77.751	-44.449	122.200	PEAK
9	*	5751.725	16.570	94.374	110.945	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps)-Channel 149 (5745MHz)


Vertical

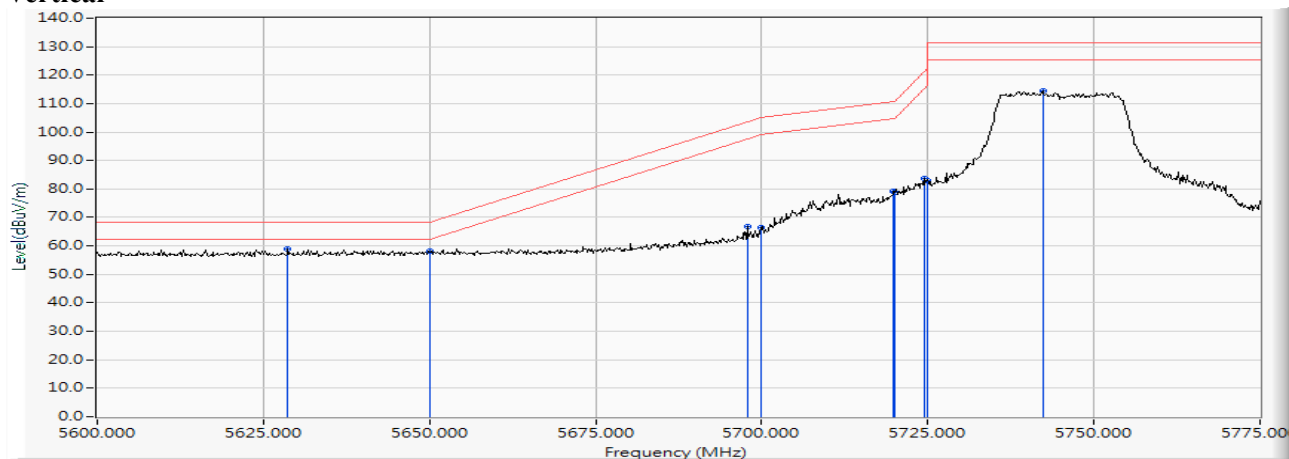

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5628.700	16.409	42.369	58.777	-9.443	68.220	PEAK
2		5650.000	16.447	41.597	58.044	-10.176	68.220	PEAK
3		5697.825	16.499	50.272	66.771	-36.820	103.591	PEAK
4		5700.000	16.502	50.086	66.588	-38.612	105.200	PEAK
5		5719.875	16.535	62.475	79.010	-31.755	110.765	PEAK
6		5720.000	16.535	62.275	78.810	-31.990	110.800	PEAK
7		5724.425	16.543	67.051	83.594	-37.295	120.889	PEAK
8		5725.000	16.544	66.523	83.067	-39.133	122.200	PEAK
9	*	5742.275	16.557	97.774	114.331	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps)-Channel 165 (5825MHz)


Horizontal

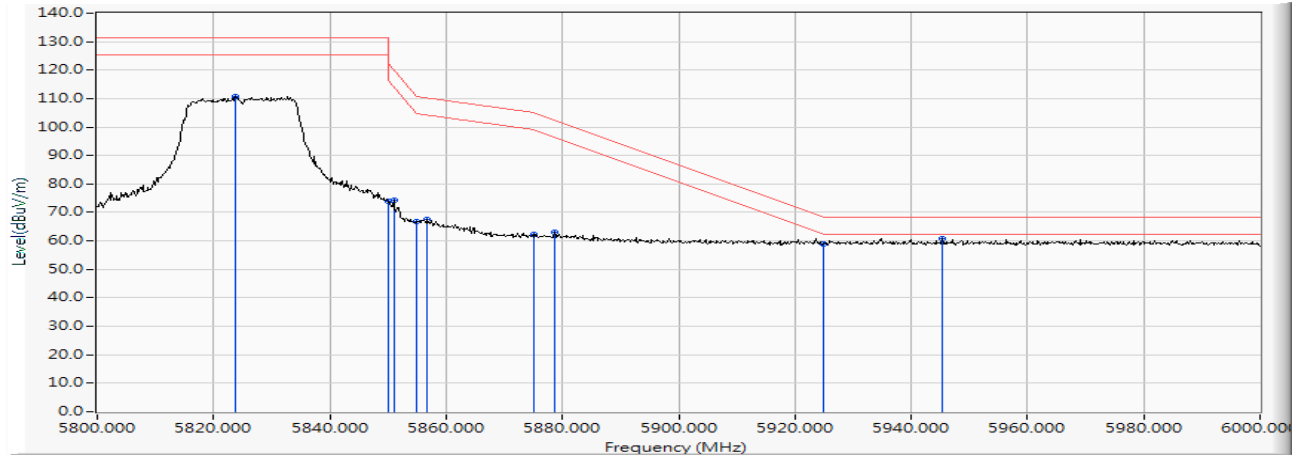

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5823.800	16.710	94.173	110.883	--	--	PEAK
2		5850.000	16.748	57.236	73.984	-48.216	122.200	PEAK
3		5851.000	16.750	57.746	74.496	-45.424	119.920	PEAK
4		5855.000	16.758	50.141	66.899	-43.901	110.800	PEAK
5		5856.800	16.763	50.844	67.607	-42.689	110.296	PEAK
6		5875.000	16.807	45.615	62.423	-42.777	105.200	PEAK
7		5878.600	16.818	46.110	62.928	-39.608	102.536	PEAK
8		5925.000	16.920	41.905	58.825	-9.375	68.200	PEAK
9		5945.400	16.945	43.913	60.858	-7.342	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 15: SISO B: Transmit (802.11ax-20BW_8.6Mbps)-Channel 165 (5825MHz)


Vertical

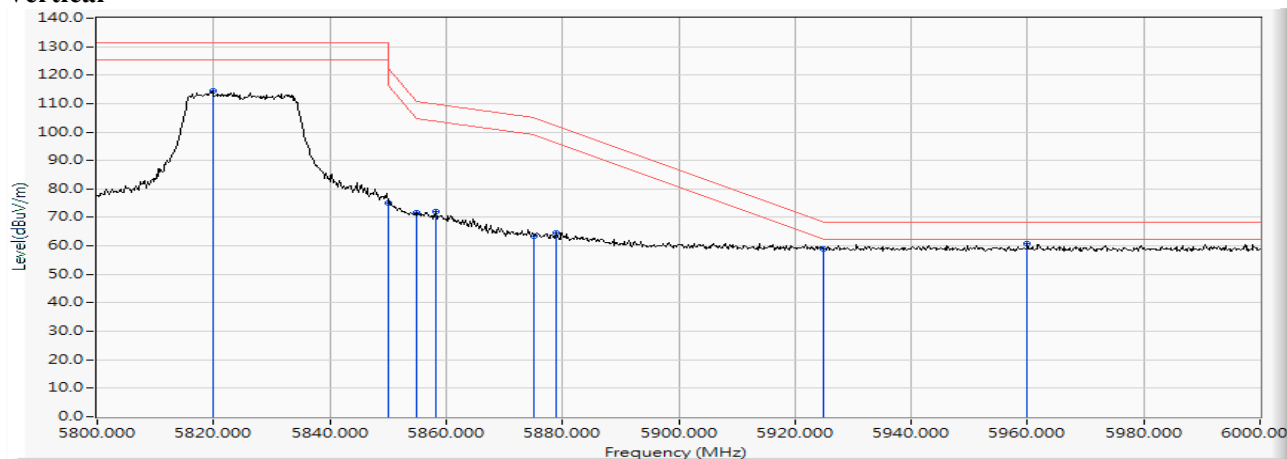

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5819.800	16.705	97.603	114.307	--	--	PEAK
2		5850.000	16.748	58.321	75.069	-47.131	122.200	PEAK
3		5855.000	16.758	54.773	71.531	-39.269	110.800	PEAK
4		5858.200	16.766	55.257	72.023	-37.881	109.904	PEAK
5		5875.000	16.807	46.745	63.553	-41.647	105.200	PEAK
6		5879.000	16.818	47.687	64.506	-37.734	102.240	PEAK
7		5925.000	16.920	42.137	59.057	-9.143	68.200	PEAK
8		5960.000	16.973	43.752	60.725	-7.475	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps)-Channel 38 (5190MHz)

Horizontal

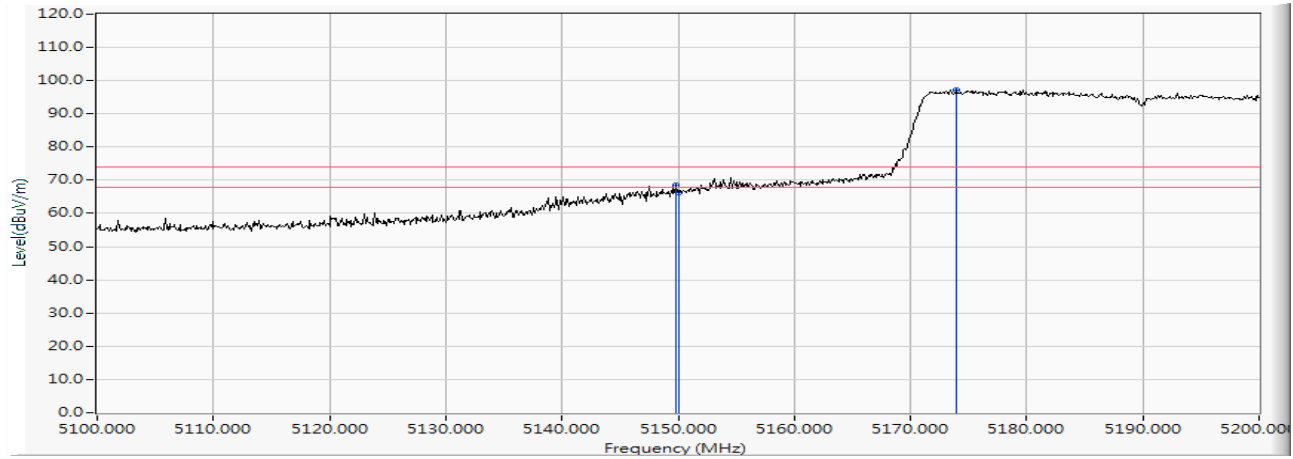


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5149.800	15.306	53.084	68.390	-5.610	74.000	PEAK
2		5150.000	15.307	50.899	66.206	-7.794	74.000	PEAK
3	*	5173.900	15.365	81.892	97.257	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps)-Channel 38 (5190MHz)

Horizontal

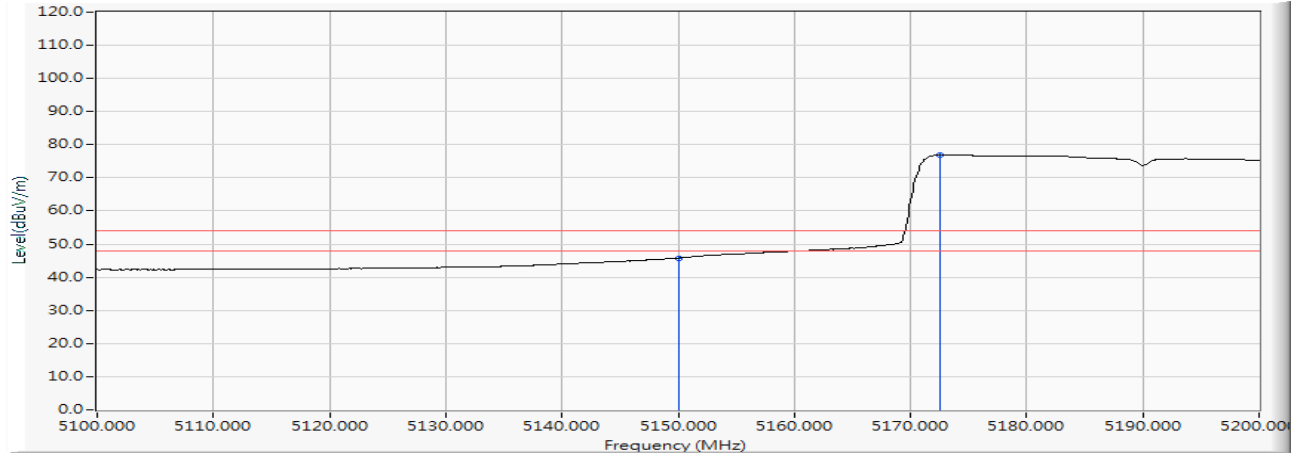


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	30.531	45.838	-8.162	54.000	AVERAGE
2	*	5172.500	15.359	61.558	76.917	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps)-Channel 38 (5190MHz)

Vertical

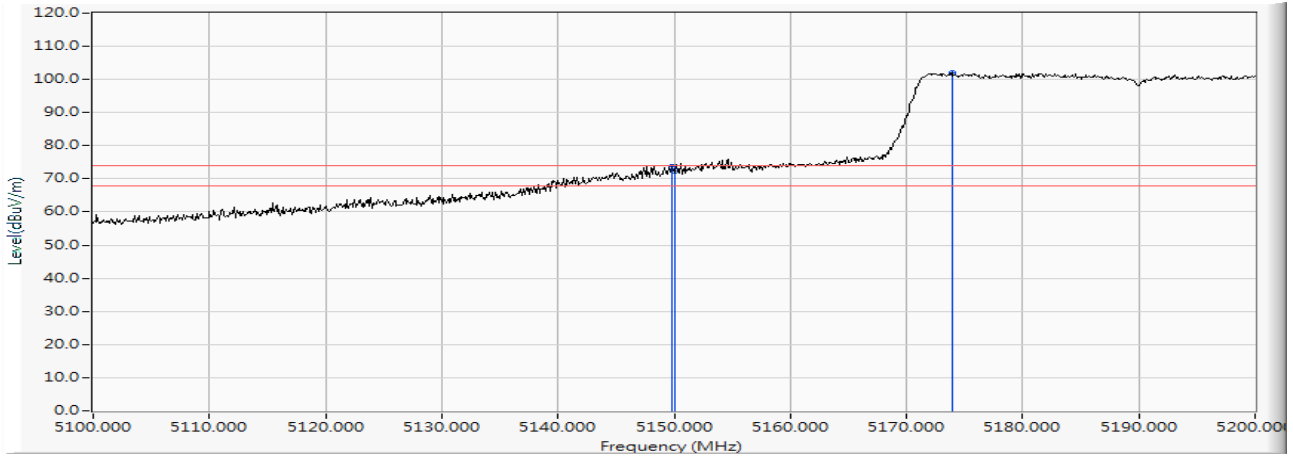


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5149.800	15.306	58.321	73.627	-0.373	74.000	PEAK
2		5150.000	15.307	57.137	72.444	-1.556	74.000	PEAK
3	*	5174.000	15.365	86.702	102.068	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps)-Channel 38 (5190MHz)

Vertical

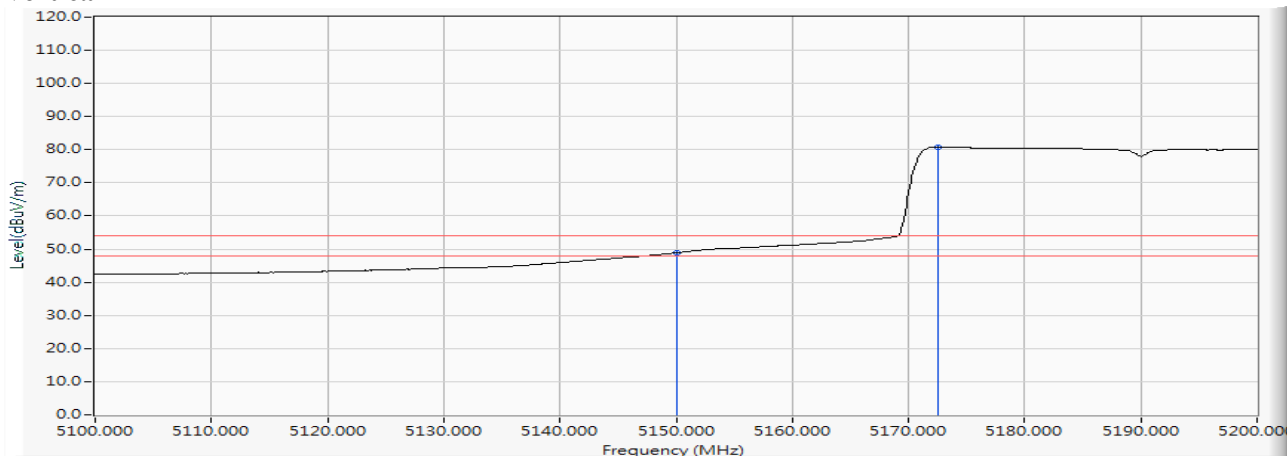


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	33.558	48.865	-5.135	54.000	AVERAGE
2	*	5172.600	15.359	65.536	80.895	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps)-Channel 62 (5310MHz)

Horizontal

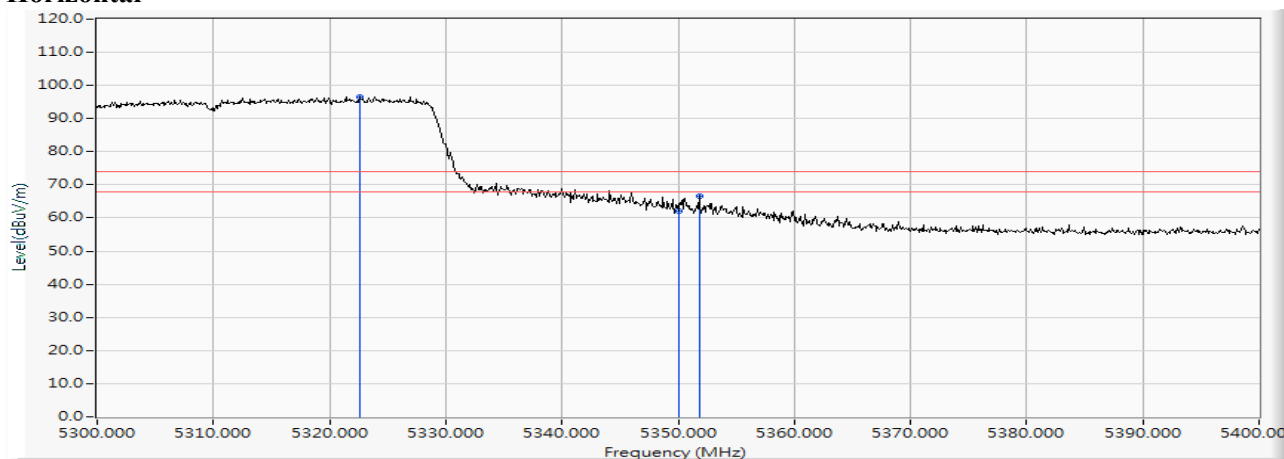


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5322.600	15.858	80.685	96.543	--	--	PEAK
2		5350.000	15.912	46.234	62.146	-11.854	74.000	PEAK
3		5351.800	15.918	50.614	66.532	-7.468	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps)-Channel 62 (5310MHz)

Horizontal

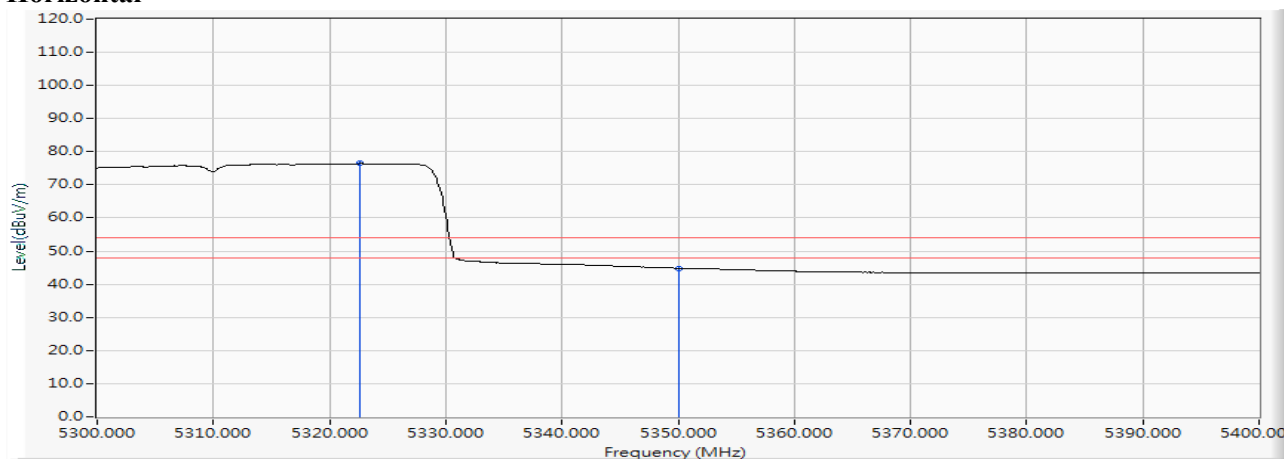


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5322.600	15.858	60.564	76.422	--	--	AVERAGE
2		5350.000	15.912	28.943	44.855	-9.145	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps)-Channel 62 (5310MHz)

Vertical

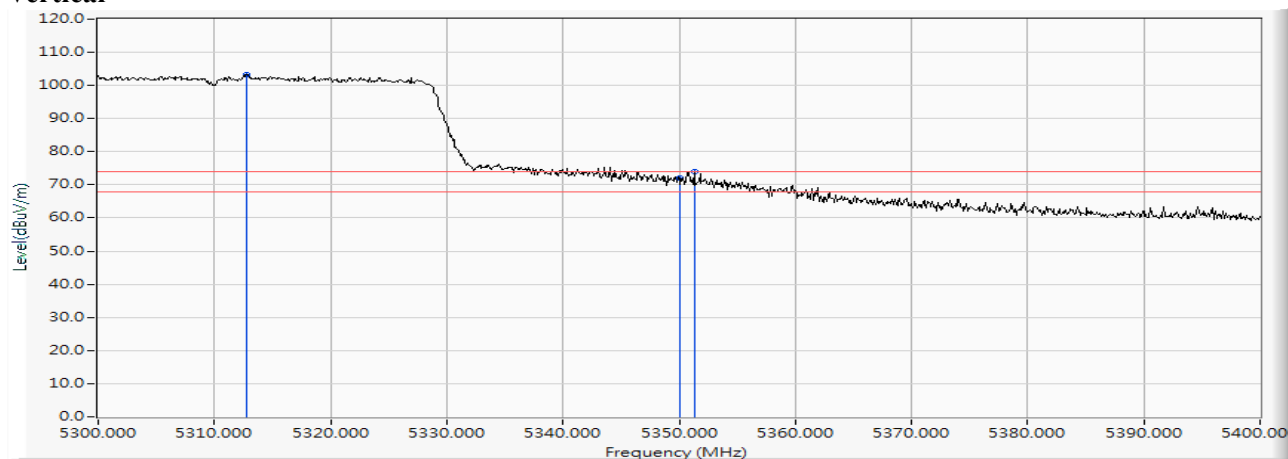


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5312.800	15.827	87.401	103.228	--	--	PEAK
2		5350.000	15.912	56.156	72.068	-1.932	74.000	PEAK
3		5351.300	15.917	58.076	73.992	-0.008	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps)-Channel 62 (5310MHz)

Vertical

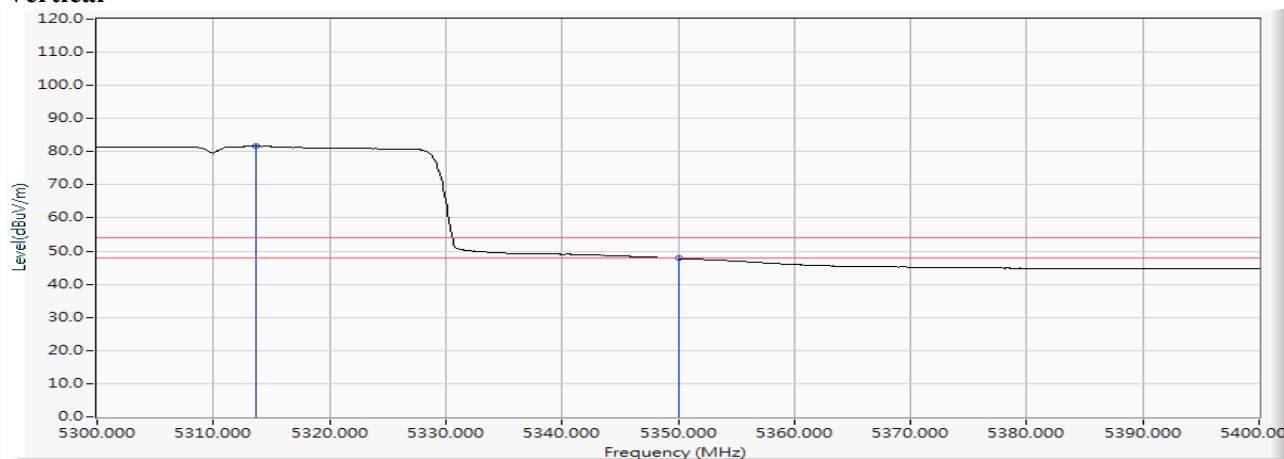


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5313.700	15.830	65.824	81.654	--	--	AVERAGE
2		5350.000	15.912	31.896	47.808	-6.192	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps)-Channel 102 (5510MHz)

Horizontal

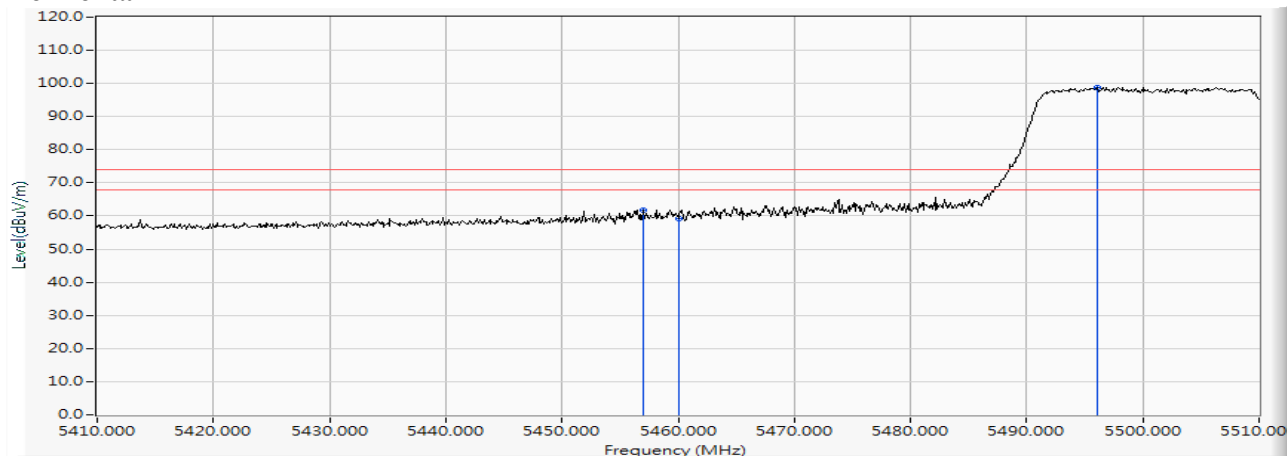


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5457.000	16.180	45.640	61.820	-12.180	74.000	PEAK
2		5460.000	16.185	42.952	59.137	-14.863	74.000	PEAK
3	*	5496.100	16.265	82.510	98.775	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps)-Channel 102 (5510MHz)

Horizontal

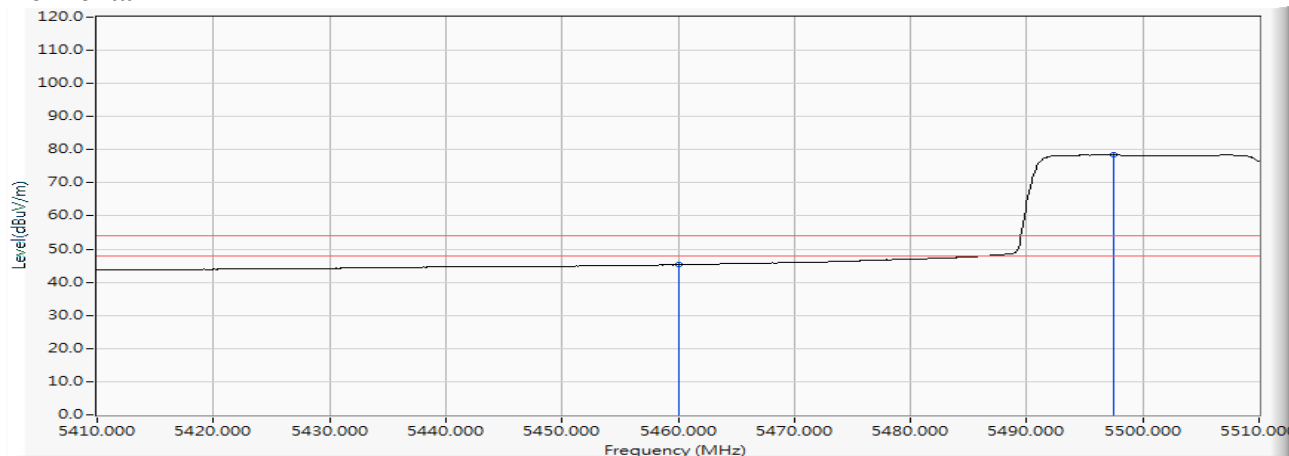


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5460.000	16.185	29.035	45.220	-8.780	54.000	AVERAGE
2	*	5497.500	16.267	62.159	78.426	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps)-Channel 102 (5510MHz)

Vertical

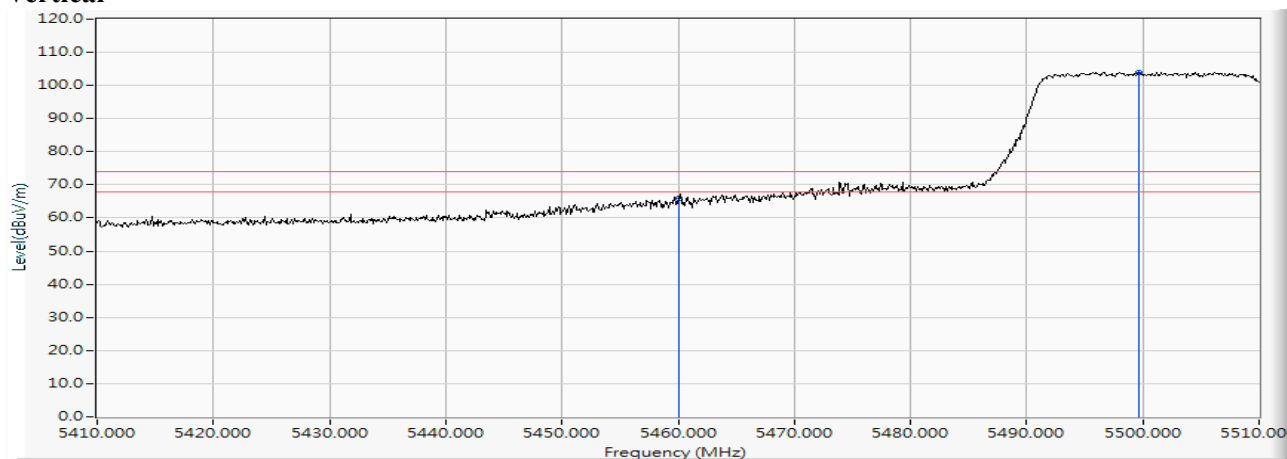


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5460.000	16.185	49.834	66.019	-7.981	74.000	PEAK
2	*	5499.600	16.270	87.770	104.040	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps)-Channel 102 (5510MHz)

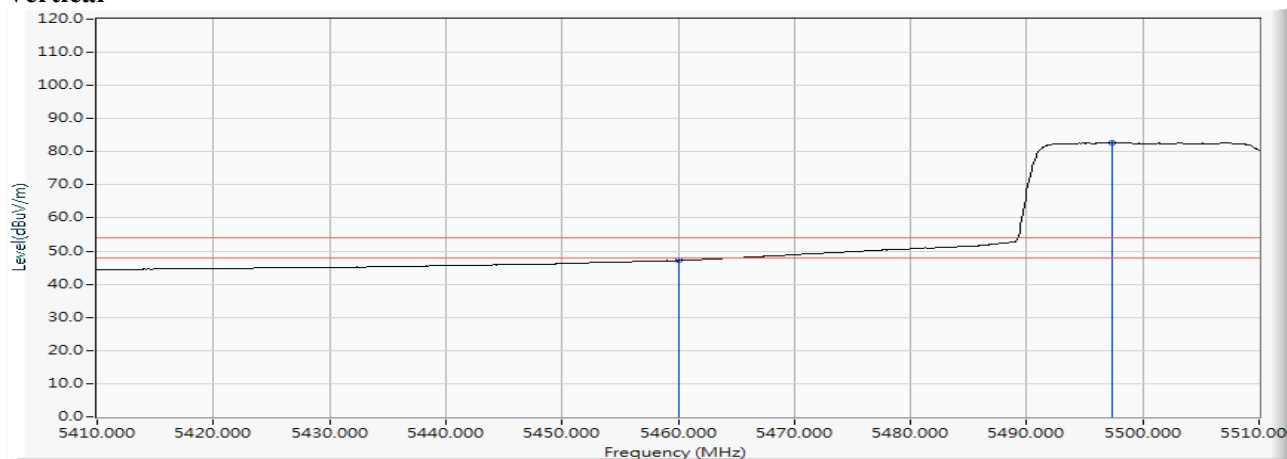Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5460.000	16.185	30.978	47.163	-6.837	54.000	AVERAGE
2	*	5497.400	16.267	66.456	82.723	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps)-Channel 102 (5510MHz)


Horizontal

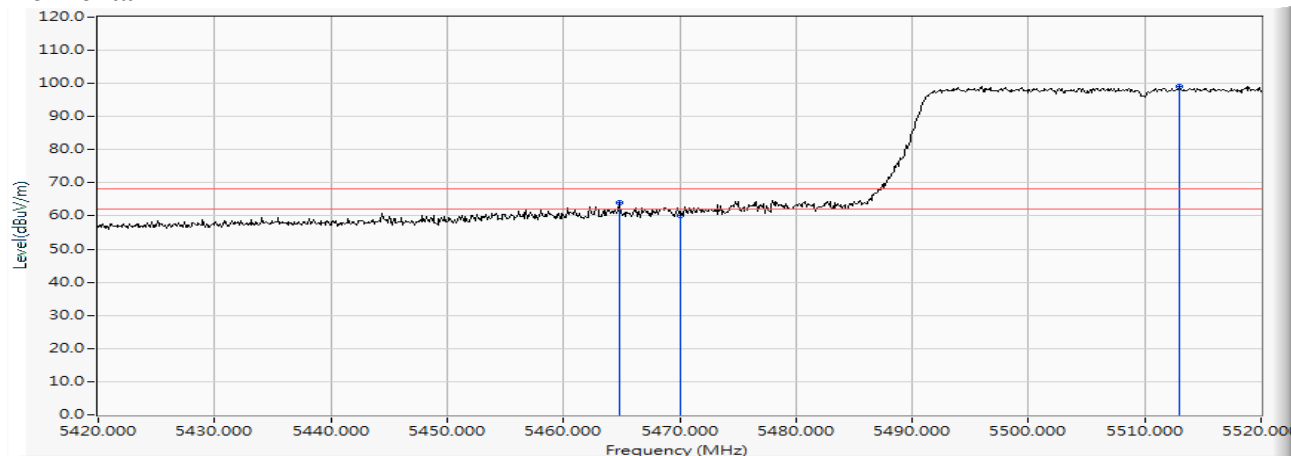

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5464.800	16.192	47.739	63.930	-4.290	68.220	PEAK
2		5470.000	16.200	44.043	60.243	-7.977	68.220	PEAK
3	*	5513.000	16.279	82.959	99.238	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps)-Channel 102 (5510MHz)


Vertical

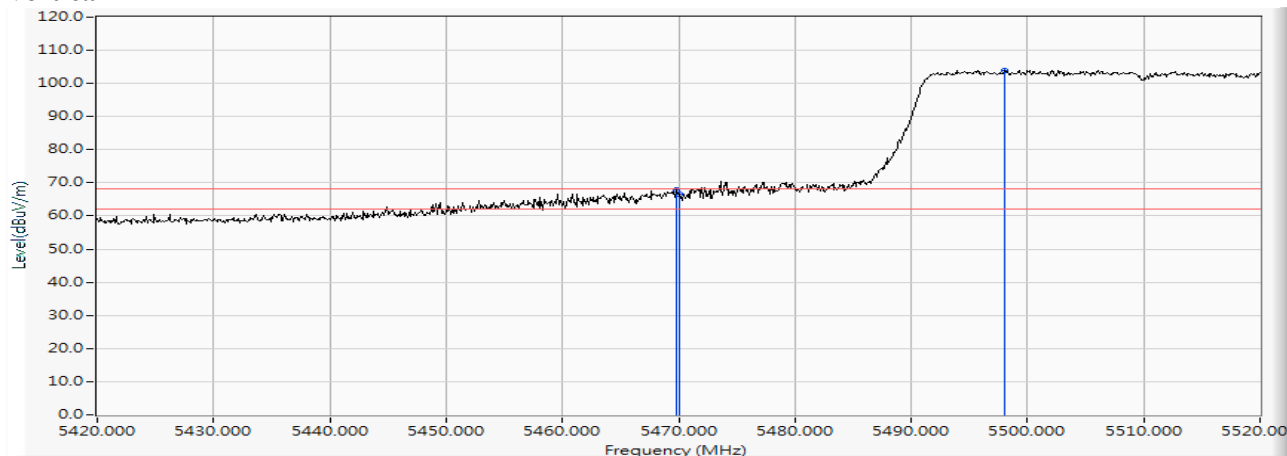

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5469.800	16.200	51.692	67.891	-0.329	68.220	PEAK
2		5470.000	16.200	50.485	66.685	-1.535	68.220	PEAK
3	*	5498.000	16.268	87.788	104.056	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps)-Channel 134 (5670MHz)


Horizontal

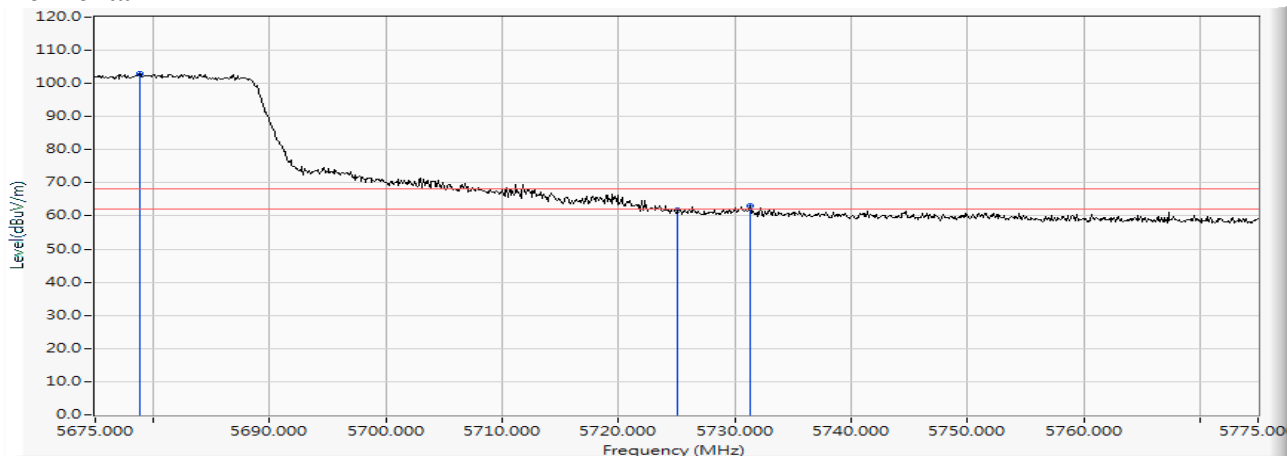

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5678.800	16.475	86.317	102.793	--	--	PEAK
2		5725.000	16.544	45.239	61.783	-6.437	68.220	PEAK
3		5731.300	16.550	46.625	63.175	-5.045	68.220	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps)-Channel 134 (5670MHz)


Vertical

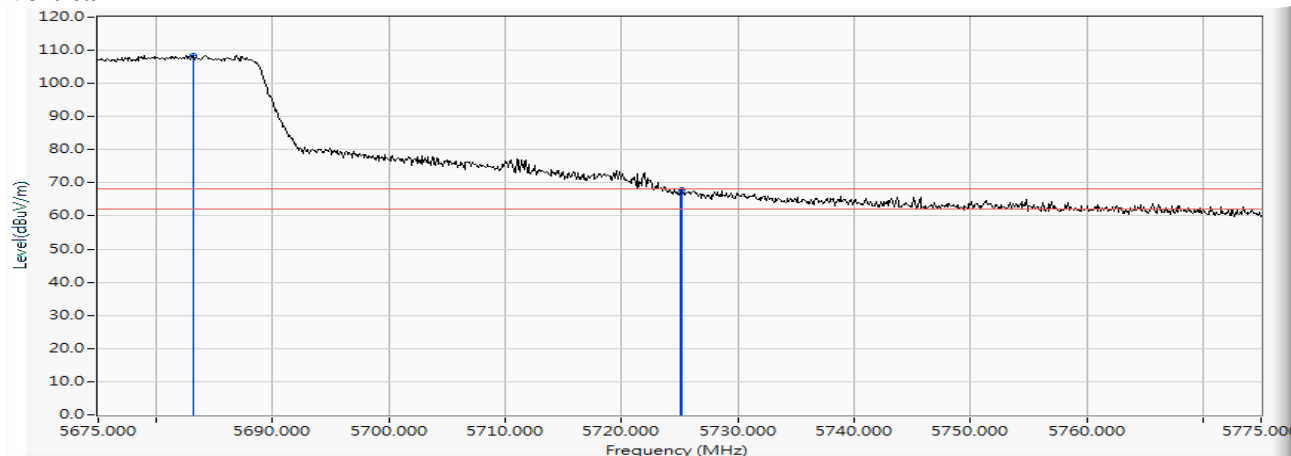

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5683.200	16.482	91.928	108.409	--	--	PEAK
2		5725.000	16.544	50.453	66.997	-1.223	68.220	PEAK
3		5725.200	16.544	51.376	67.921	-0.299	68.220	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps)-Channel 151 (5755MHz)


Horizontal

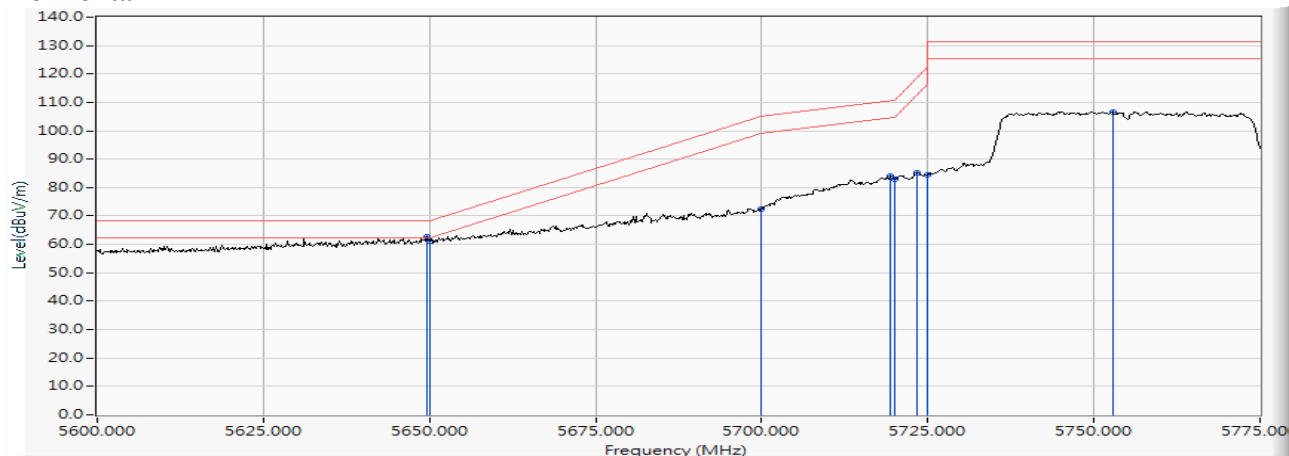

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5649.525	16.446	46.140	62.585	-5.635	68.220	PEAK
2		5650.000	16.447	44.884	61.331	-6.889	68.220	PEAK
3		5700.000	16.502	56.104	72.606	-32.594	105.200	PEAK
4		5719.350	16.533	67.597	84.131	-26.487	110.618	PEAK
5		5720.000	16.535	66.530	83.065	-27.735	110.800	PEAK
6		5723.375	16.541	68.698	85.239	-33.256	118.495	PEAK
7		5725.000	16.544	68.092	84.636	-37.564	122.200	PEAK
8		5752.775	16.572	90.132	106.704	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps)-Channel 151 (5755MHz)


Vertical

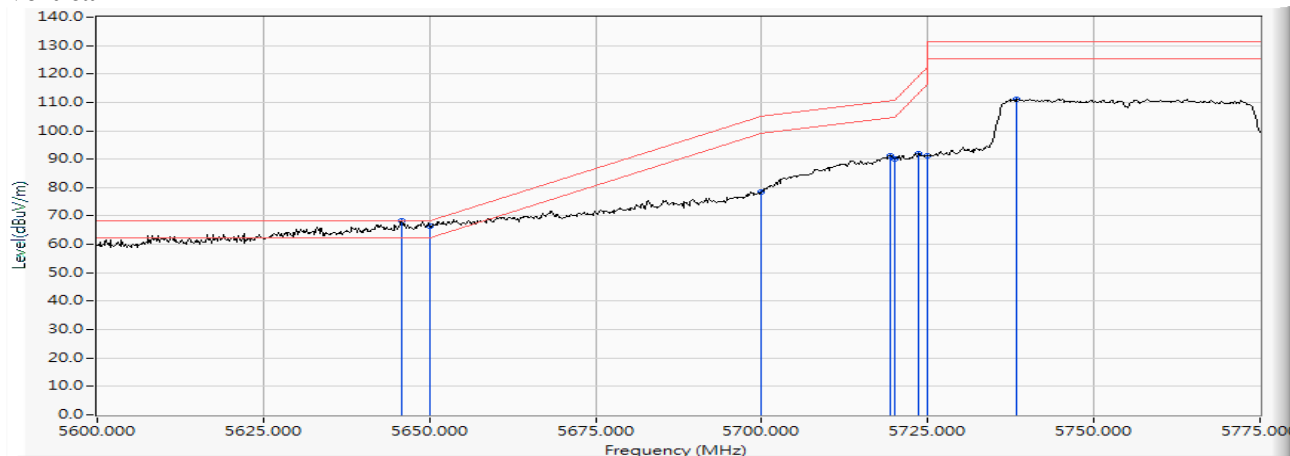

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	5645.850	16.436	51.773	68.208	-0.012	68.220	PEAK
2		5650.000	16.447	49.995	66.442	-1.778	68.220	PEAK
3		5700.000	16.502	61.847	78.349	-26.851	105.200	PEAK
4		5719.350	16.533	74.754	91.288	-19.330	110.618	PEAK
5		5720.000	16.535	73.679	90.214	-20.586	110.800	PEAK
6		5723.550	16.541	75.594	92.136	-26.758	118.894	PEAK
7		5725.000	16.544	74.725	91.269	-30.931	122.200	PEAK
8		5738.250	16.555	94.645	111.200	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps)-Channel 159 (5795MHz)


Horizontal

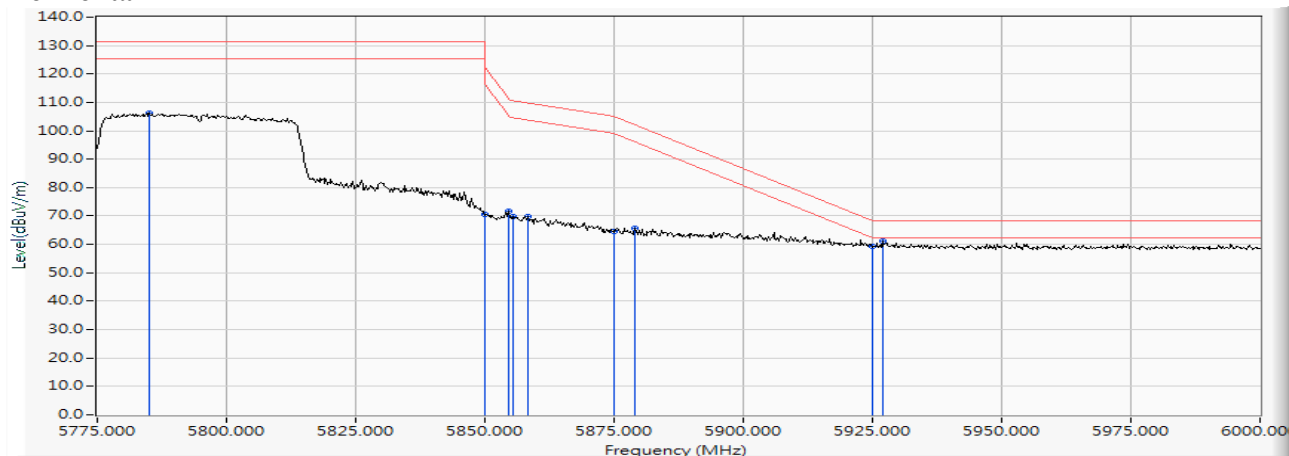

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5785.125	16.620	89.568	106.188	--	--	PEAK
2		5850.000	16.748	53.641	70.389	-51.811	122.200	PEAK
3		5854.650	16.757	55.004	71.761	-39.837	111.598	PEAK
4		5855.325	16.759	53.024	69.783	-40.926	110.709	PEAK
5		5858.250	16.766	53.003	69.769	-40.121	109.890	PEAK
6		5875.000	16.807	47.719	64.527	-40.673	105.200	PEAK
7		5878.950	16.818	48.804	65.623	-36.654	102.277	PEAK
8		5925.000	16.920	42.475	59.395	-8.805	68.200	PEAK
9	*	5926.875	16.922	44.284	61.206	-6.994	68.200	PEAK


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 16: SISO B: Transmit (802.11ax-40BW_17.2Mbps)-Channel 159 (5795MHz)

Vertical

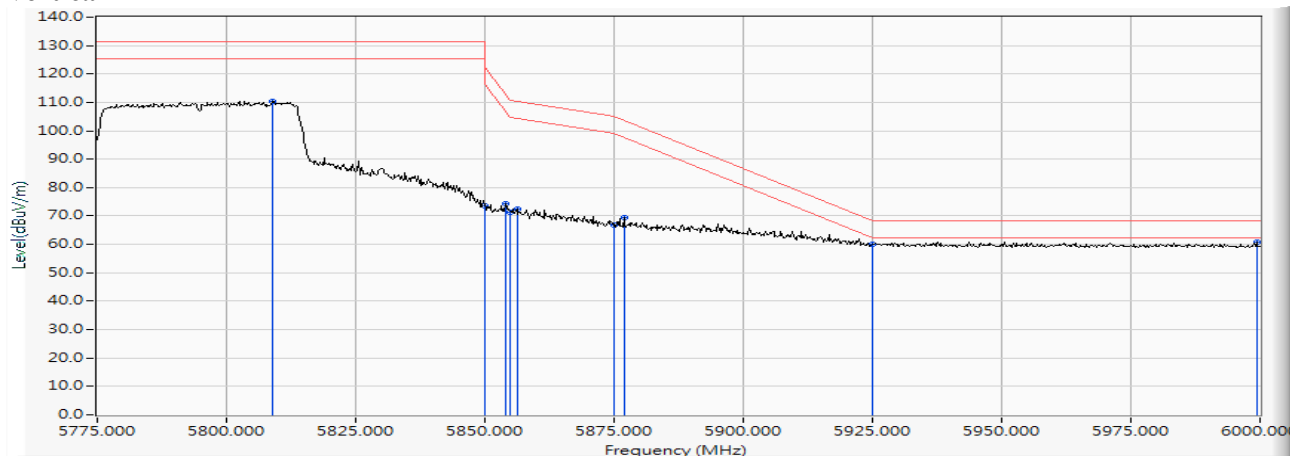

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5808.975	16.681	93.737	110.419	--	--	PEAK
2		5850.000	16.748	56.923	73.671	-48.529	122.200	PEAK
3		5853.975	16.755	57.564	74.320	-38.817	113.137	PEAK
4		5855.000	16.758	54.725	71.483	-39.317	110.800	PEAK
5		5856.225	16.761	55.716	72.477	-37.980	110.457	PEAK
6		5875.000	16.807	50.061	66.869	-38.331	105.200	PEAK
7		5876.925	16.813	52.495	69.308	-34.467	103.775	PEAK
8		5925.000	16.920	43.110	60.030	-8.170	68.200	PEAK
9	*	5999.325	17.052	43.664	60.716	-7.484	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 17: SISO B: Transmit (802.11ax-80BW_36Mbps)-Channel 42 (5210MHz)

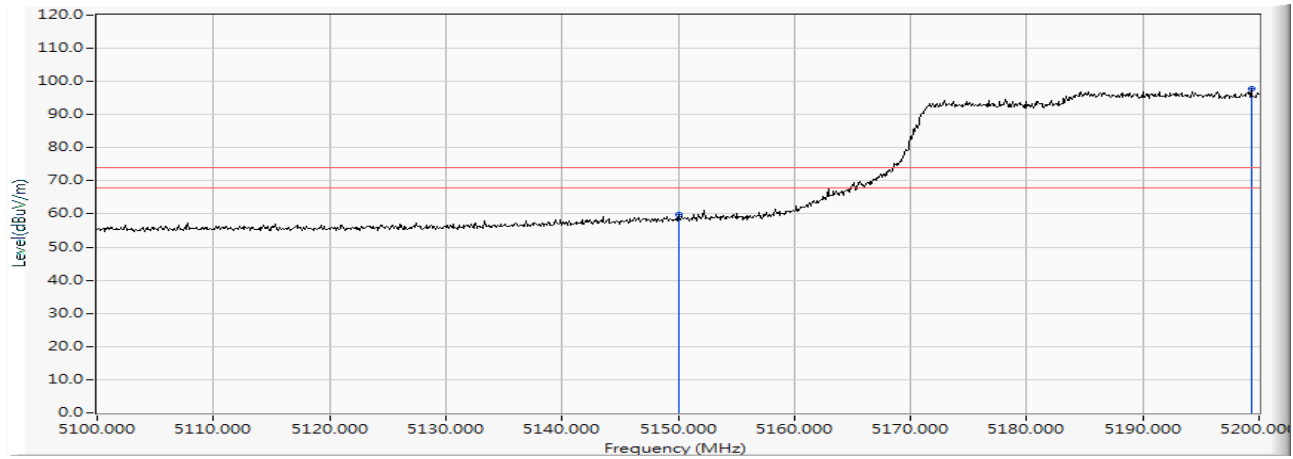Horizontal


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	44.581	59.888	-14.112	74.000	PEAK
2	*	5199.300	15.470	82.399	97.869	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 17: SISO B: Transmit (802.11ax-80BW_36Mbps)-Channel 42 (5210MHz)

Horizontal

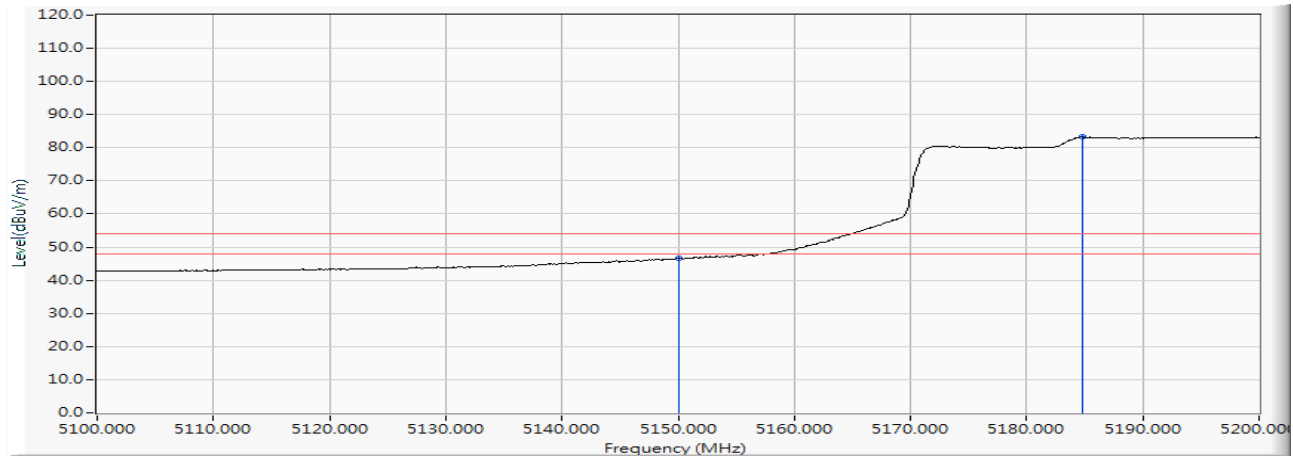


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	31.296	46.603	-7.397	54.000	AVERAGE
2	*	5184.800	15.413	67.871	83.284	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 17: SISO B: Transmit (802.11ax-80BW_36Mbps)-Channel 42 (5210MHz)

Vertical

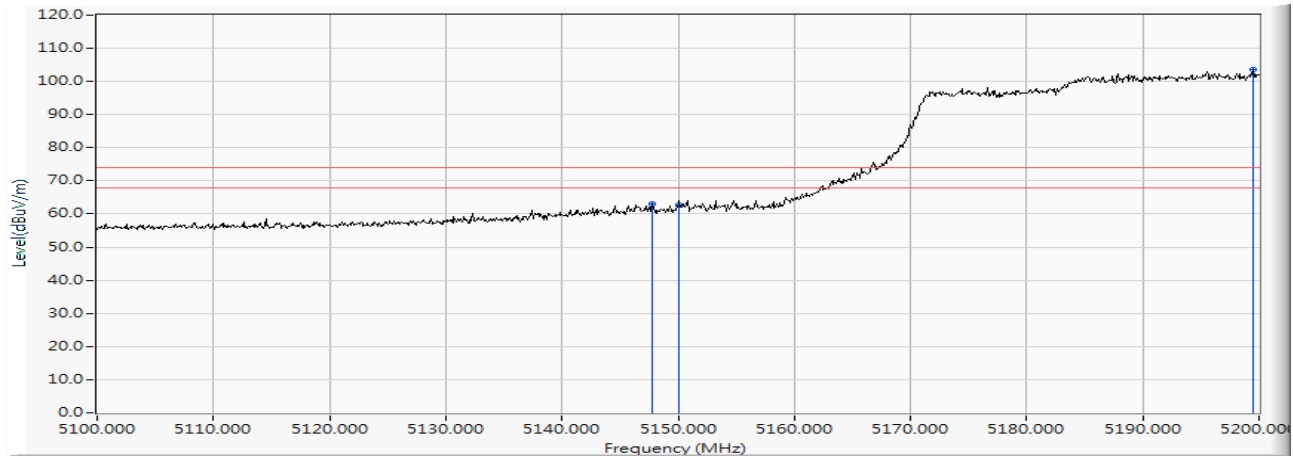


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5147.800	15.295	47.816	63.110	-10.890	74.000	PEAK
2		5150.000	15.307	47.294	62.601	-11.399	74.000	PEAK
3	*	5199.500	15.471	88.266	103.737	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 17: SISO B: Transmit (802.11ax-80BW_36Mbps)-Channel 42 (5210MHz)

Vertical

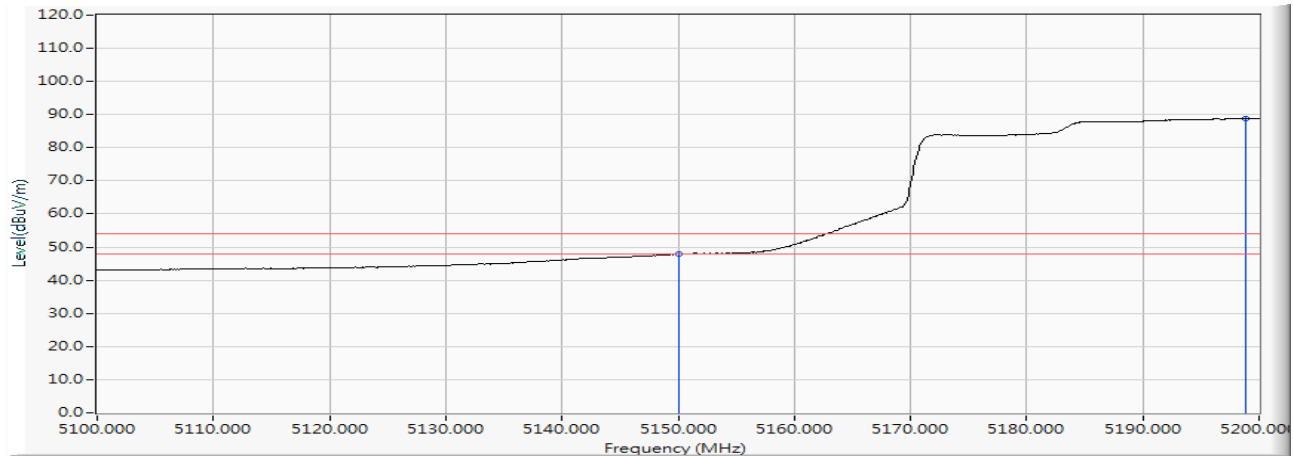


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	32.518	47.825	-6.175	54.000	AVERAGE
2	*	5198.900	15.469	73.407	88.876	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 17: SISO B: Transmit (802.11ax-80BW_36Mbps)-Channel 58 (5290MHz)

Horizontal

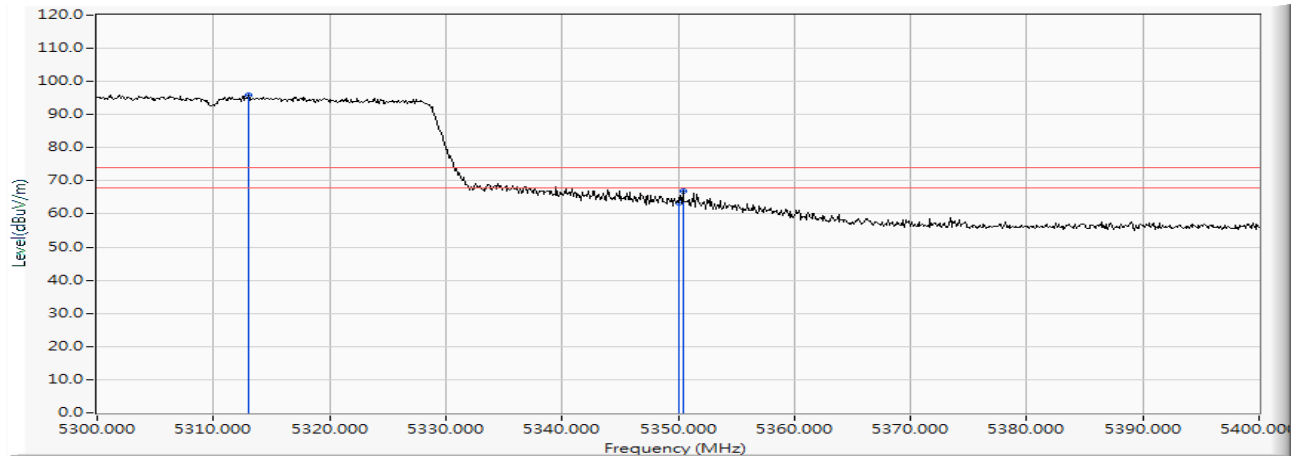


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5313.000	15.827	80.096	95.924	--	--	PEAK
2		5350.000	15.912	47.501	63.413	-10.587	74.000	PEAK
3		5350.400	15.914	51.079	66.992	-7.008	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 17: SISO B: Transmit (802.11ax-80BW_36Mbps)-Channel 58 (5290MHz)

Horizontal

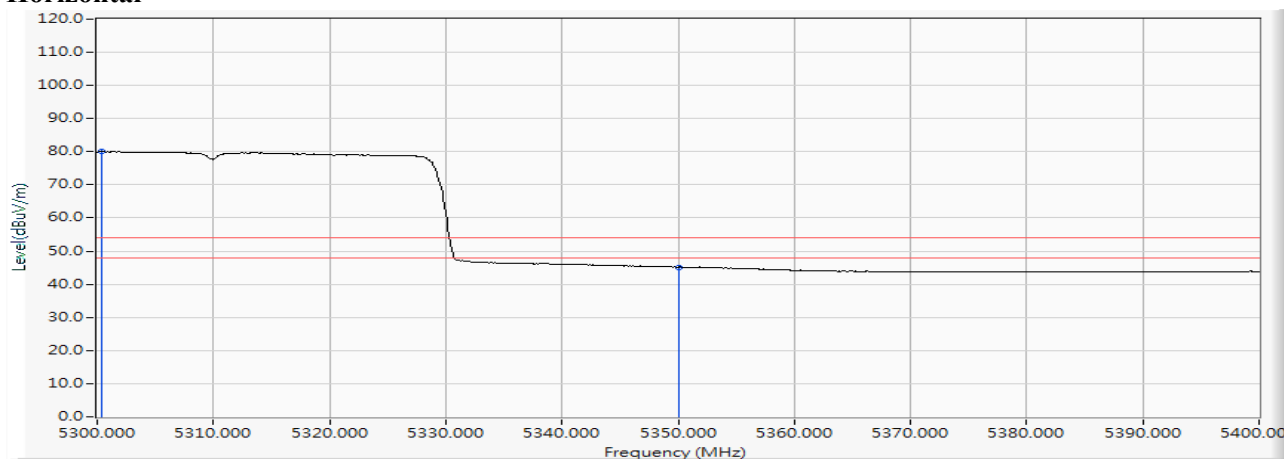


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5300.400	15.797	64.290	80.087	--	--	AVERAGE
2		5350.000	15.912	29.270	45.182	-8.818	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 17: SISO B: Transmit (802.11ax-80BW_36Mbps)-Channel 58 (5290MHz)

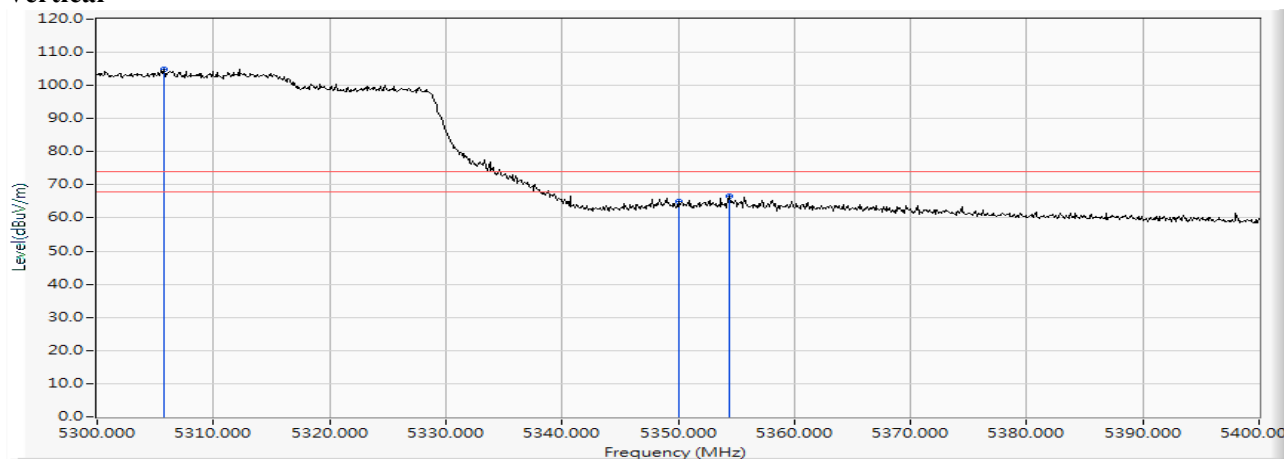
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5305.800	15.811	89.091	104.901	--	--	PEAK
2		5350.000	15.912	49.227	65.139	-8.861	74.000	PEAK
3		5354.400	15.926	50.612	66.538	-7.462	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 17: SISO B: Transmit (802.11ax-80BW_36Mbps)-Channel 58 (5290MHz)

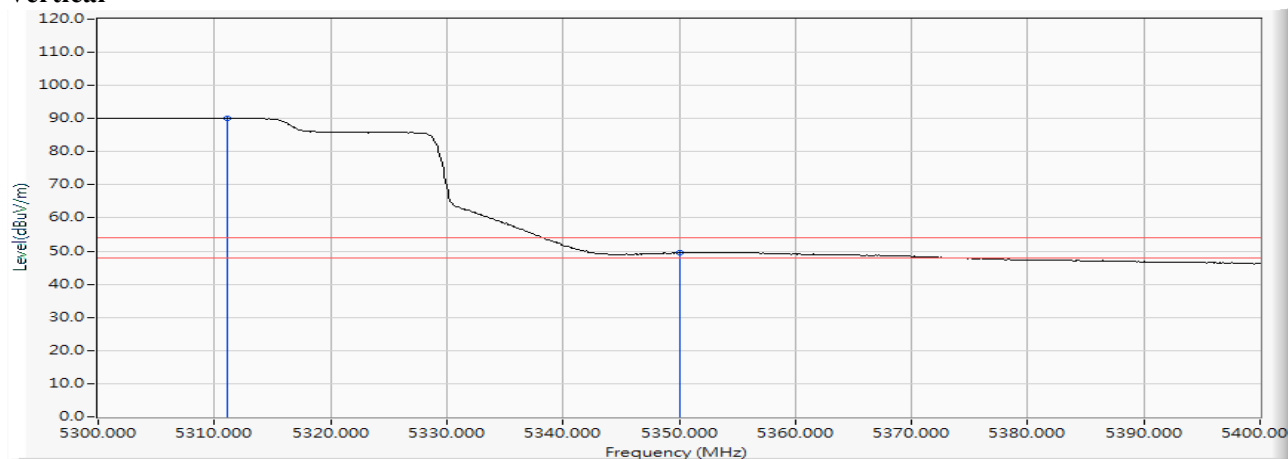Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5311.100	15.823	74.397	90.220	--	--	AVERAGE
2		5350.000	15.912	33.599	49.511	-4.489	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 17: SISO B: Transmit (802.11ax-80BW_36Mbps)-Channel 106 (5530MHz)

Horizontal

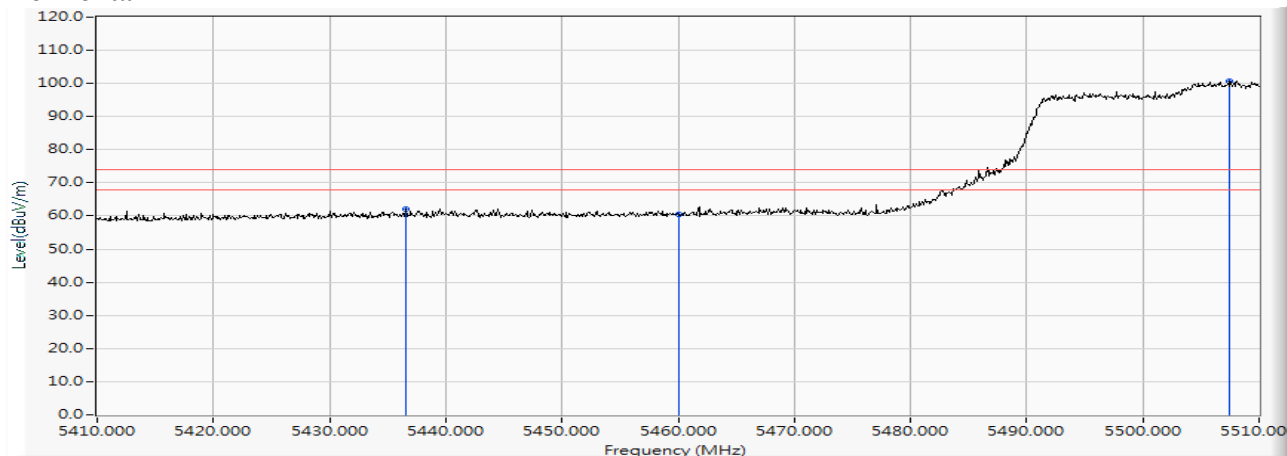


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5436.600	16.117	46.126	62.243	-11.757	74.000	PEAK
2		5460.000	16.185	44.297	60.482	-13.518	74.000	PEAK
3	*	5507.400	16.274	84.521	100.795	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 17: SISO B: Transmit (802.11ax-80BW_36Mbps)-Channel 106 (5530MHz)

Horizontal

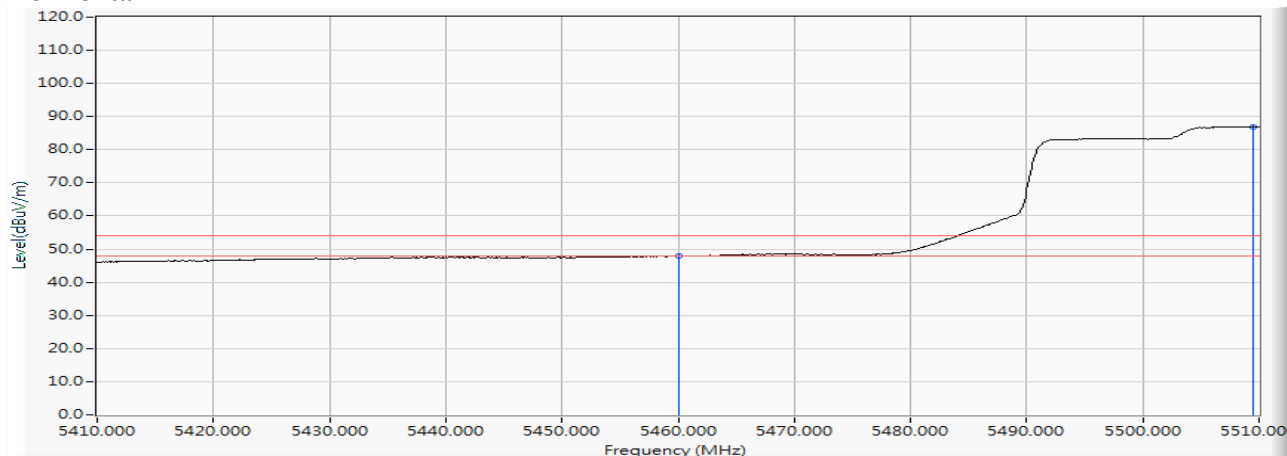


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5460.000	16.185	31.699	47.884	-6.116	54.000	AVERAGE
2	*	5509.500	16.274	70.706	86.981	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 17: SISO B: Transmit (802.11ax-80BW_36Mbps)-Channel 106 (5530MHz)

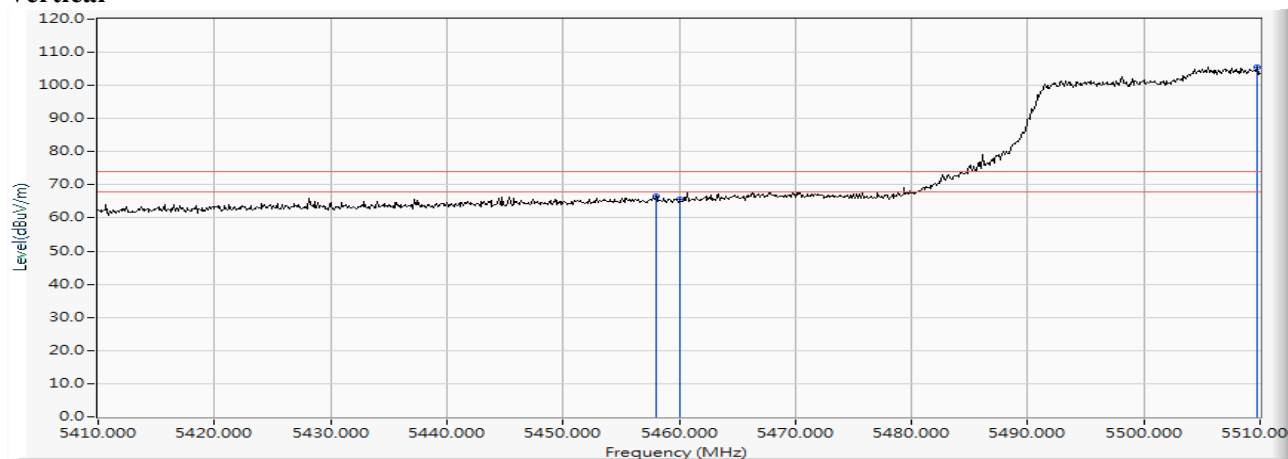
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5458.000	16.182	50.278	66.460	-7.540	74.000	PEAK
2		5460.000	16.185	49.396	65.581	-8.419	74.000	PEAK
3	*	5509.800	16.275	89.136	105.411	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 17: SISO B: Transmit (802.11ax-80BW_36Mbps)-Channel 106 (5530MHz)

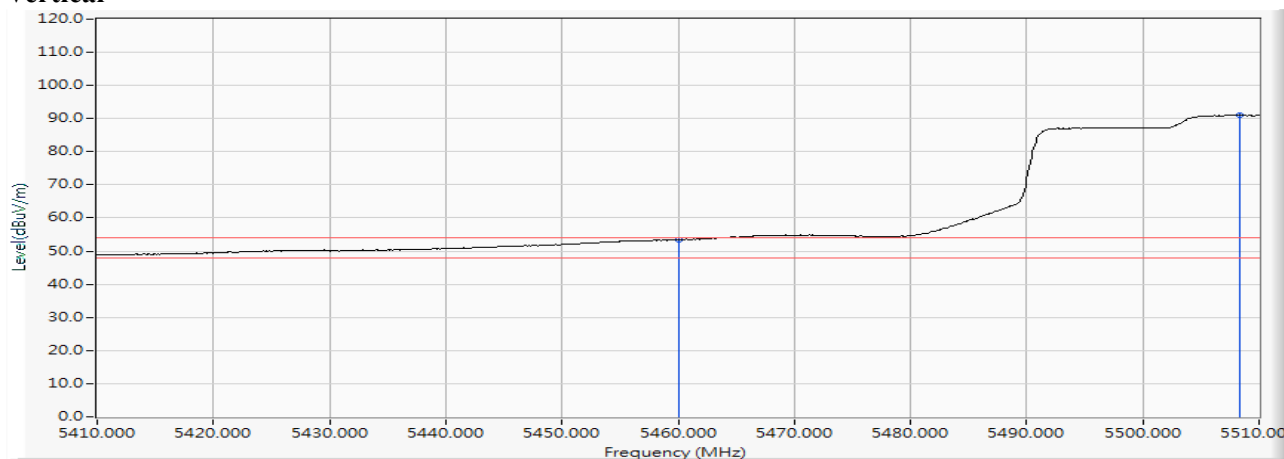Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5460.000	16.185	37.249	53.434	-0.566	54.000	AVERAGE
2	*	5508.400	16.275	74.770	91.044	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 17: SISO B: Transmit (802.11ax-80BW_36Mbps)-Channel 106 (5530MHz)

Horizontal

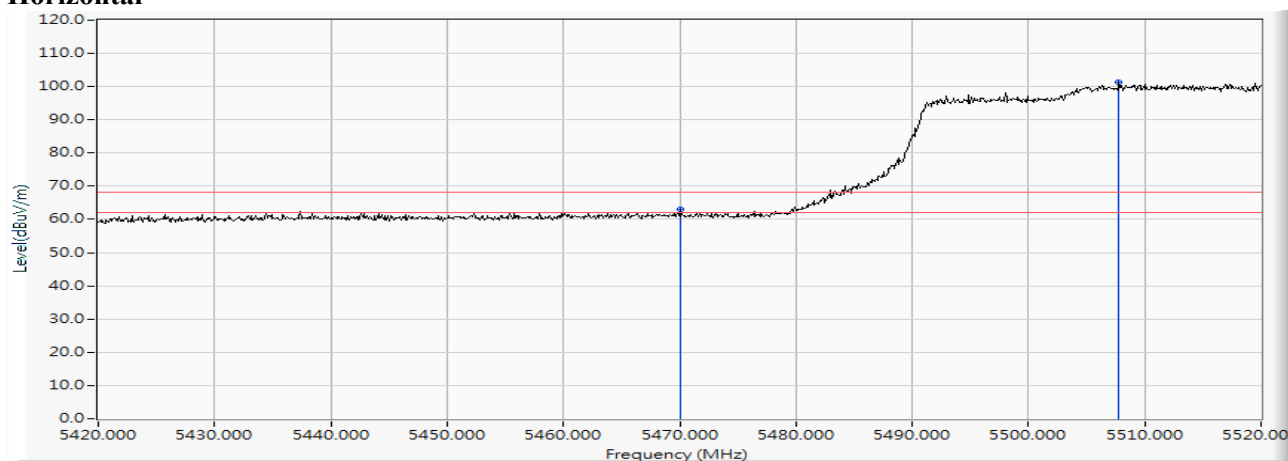

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5470.000	16.200	46.969	63.169	-5.051	68.220	PEAK
2	*	5507.800	16.274	85.170	101.444	--	--	PEAK


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 17: SISO B: Transmit (802.11ax-80BW_36Mbps)-Channel 106 (5530MHz)

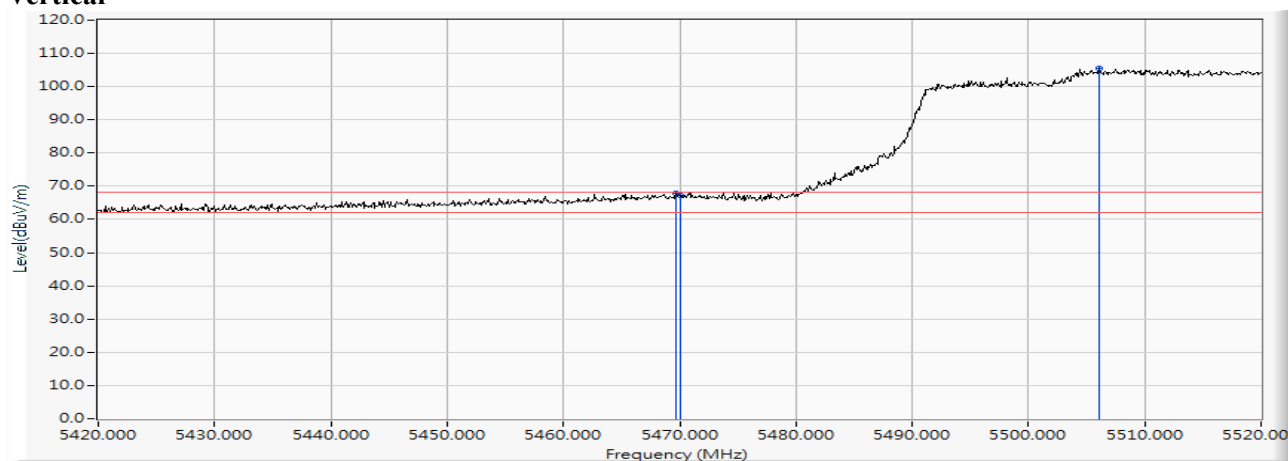Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5469.700	16.199	51.766	67.965	-0.255	68.220	PEAK
2		5470.000	16.200	51.092	67.292	-0.928	68.220	PEAK
3	*	5506.100	16.273	89.237	105.510	--	--	PEAK


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 17: SISO B: Transmit (802.11ax-80BW_36Mbps)-Channel 155 (5775MHz)

Horizontal

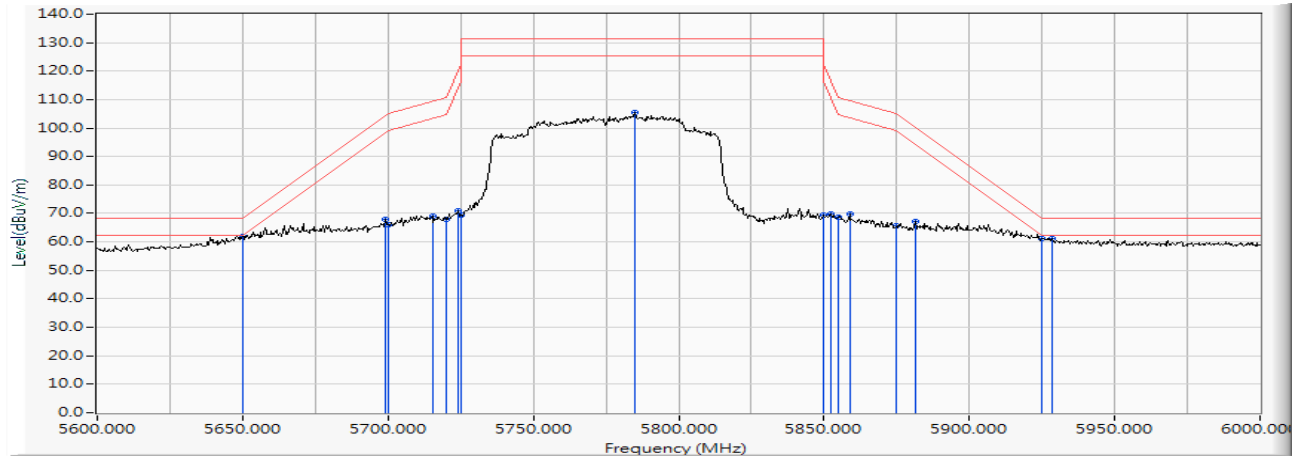

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5650.000	16.447	45.479	61.926	-6.294	68.220	PEAK
2		5699.200	16.500	51.352	67.853	-36.755	104.608	PEAK
3		5700.000	16.502	49.553	66.055	-39.145	105.200	PEAK
4		5715.200	16.525	52.711	69.237	-40.219	109.456	PEAK
5		5720.000	16.535	51.384	67.919	-42.881	110.800	PEAK
6		5724.000	16.543	54.361	70.903	-49.017	119.920	PEAK
7		5725.000	16.544	52.726	69.270	-52.930	122.200	PEAK
8	*	5784.800	16.620	88.705	105.324	--	--	PEAK
9		5850.000	16.748	52.796	69.544	-52.656	122.200	PEAK
10		5852.400	16.752	53.012	69.764	-46.964	116.728	PEAK
11		5855.000	16.758	51.956	68.714	-42.086	110.800	PEAK
12		5858.800	16.767	52.920	69.687	-40.049	109.736	PEAK
13		5875.000	16.807	48.737	65.545	-39.655	105.200	PEAK
14		5881.600	16.826	50.195	67.021	-33.295	100.316	PEAK
15		5925.000	16.920	44.329	61.249	-6.951	68.200	PEAK
16		5928.400	16.924	44.396	61.319	-6.881	68.200	PEAK


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/11
 Test Mode : Mode 17: SISO B: Transmit (802.11ax-80BW_36Mbps)-Channel 155 (5775MHz)

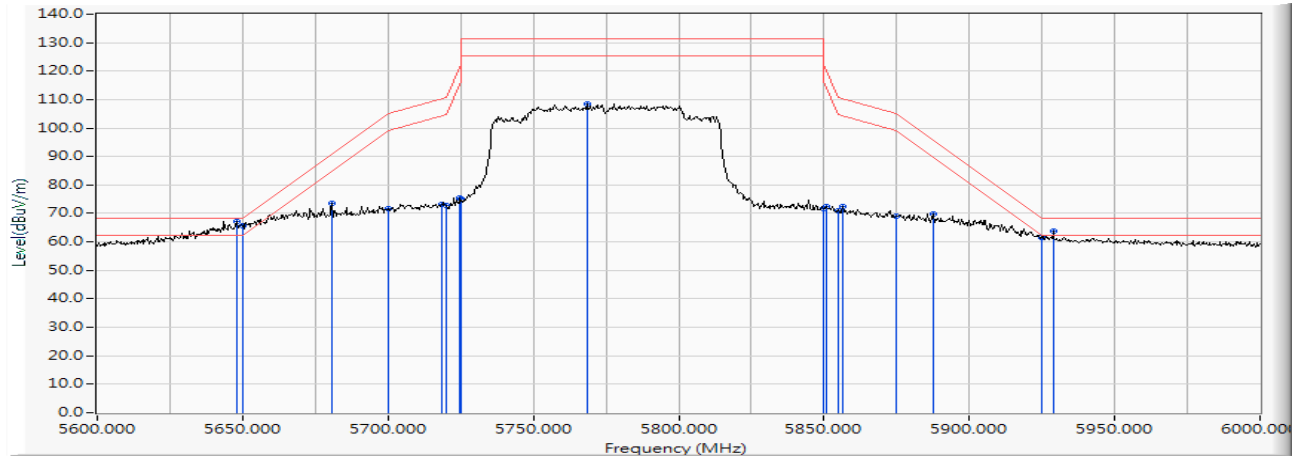Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5648.000	16.442	50.893	67.334	-0.886	68.220	PEAK
2		5650.000	16.447	49.060	65.507	-2.713	68.220	PEAK
3		5680.800	16.479	57.168	73.647	-17.353	91.000	PEAK
4		5700.000	16.502	55.048	71.550	-33.650	105.200	PEAK
5		5718.400	16.532	56.816	73.348	-37.004	110.352	PEAK
6		5720.000	16.535	56.129	72.664	-38.136	110.800	PEAK
7		5724.800	16.544	59.073	75.617	-46.127	121.744	PEAK
8		5725.000	16.544	58.454	74.998	-47.202	122.200	PEAK
9	*	5768.400	16.595	92.008	108.603	--	--	PEAK
10		5850.000	16.748	54.758	71.506	-50.694	122.200	PEAK
11		5850.800	16.750	55.868	72.617	-47.759	120.376	PEAK
12		5855.000	16.758	54.185	70.943	-39.857	110.800	PEAK
13		5856.400	16.761	55.723	72.485	-37.923	110.408	PEAK
14		5875.000	16.807	52.357	69.165	-36.035	105.200	PEAK
15		5887.600	16.843	52.958	69.801	-26.075	95.876	PEAK
16		5925.000	16.920	44.735	61.655	-6.545	68.200	PEAK
17		5928.800	16.924	46.828	63.752	-4.448	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 18: SISO B: Transmit (802.11ax-160BW_72.1Mbps)-Channel 50 (5250MHz)

Horizontal

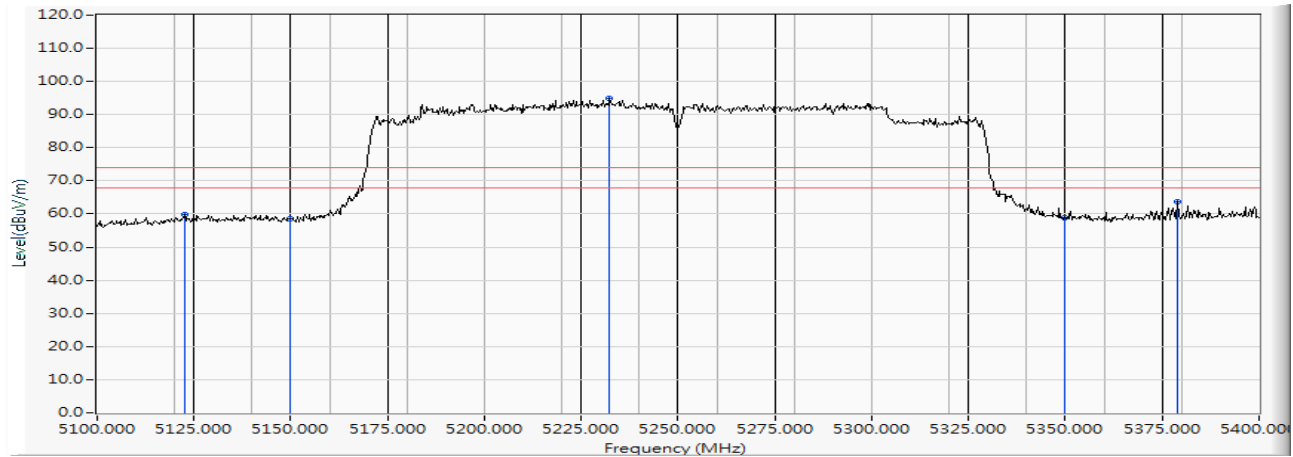


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5122.500	15.177	44.671	59.848	-14.152	74.000	PEAK
2		5150.000	15.307	43.337	58.644	-15.356	74.000	PEAK
3	*	5232.300	15.611	79.243	94.854	--	--	PEAK
4		5350.000	15.912	43.004	58.916	-15.084	74.000	PEAK
5		5379.000	15.997	47.574	63.571	-10.429	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 18: SISO B: Transmit (802.11ax-160BW_72.1Mbps)-Channel 50 (5250MHz)

Horizontal

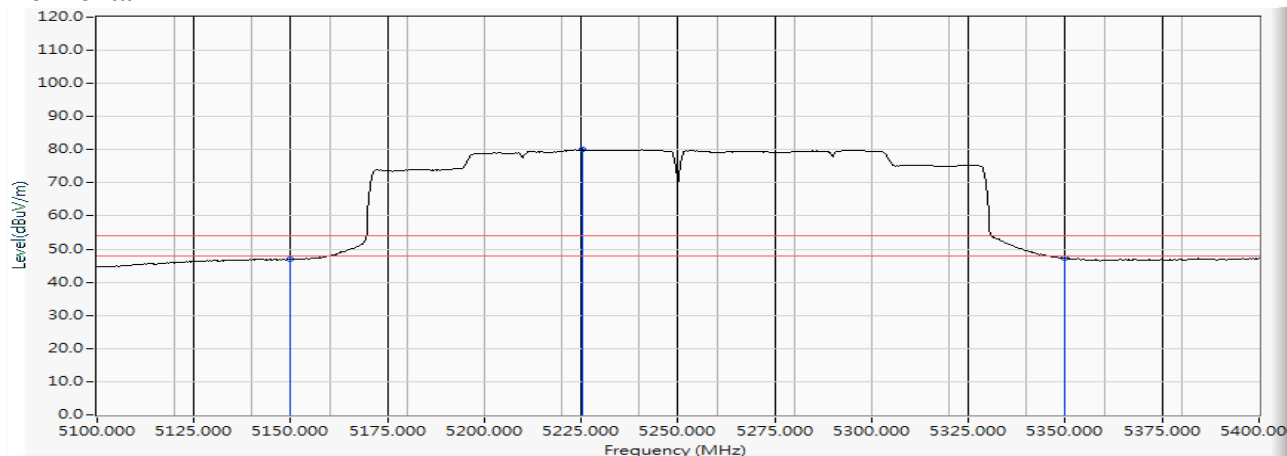


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	31.594	46.901	-7.099	54.000	AVERAGE
2	*	5225.100	15.591	64.418	80.010	--	--	AVERAGE
3		5350.000	15.912	31.307	47.219	-6.781	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 18: SISO B: Transmit (802.11ax-160BW_72.1Mbps)-Channel 50 (5250MHz)

Vertical

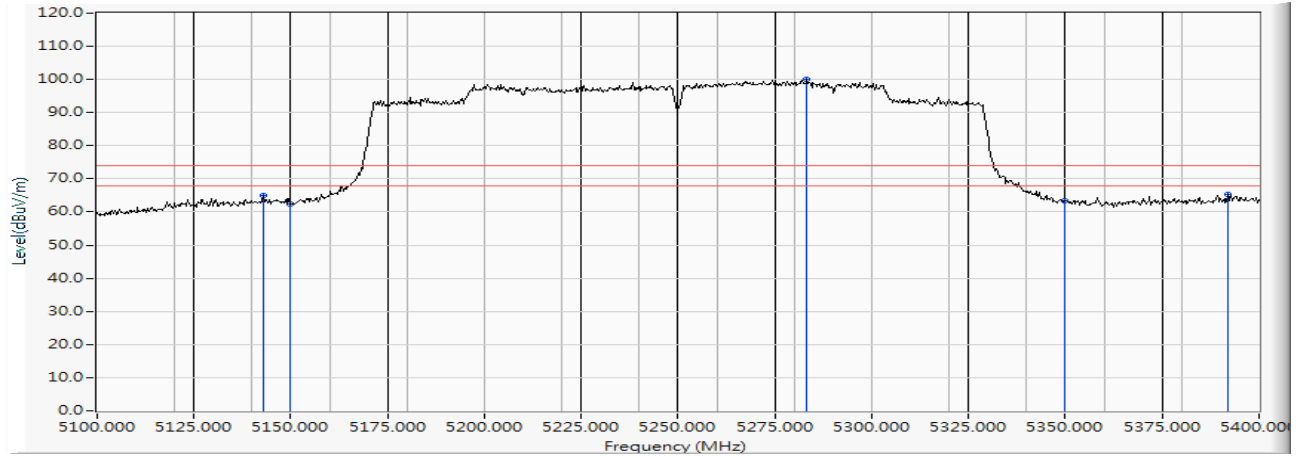


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5142.900	15.267	49.648	64.914	-9.086	74.000	PEAK
2		5150.000	15.307	46.989	62.296	-11.704	74.000	PEAK
3	*	5283.300	15.755	84.269	100.023	--	--	PEAK
4		5350.000	15.912	47.449	63.361	-10.639	74.000	PEAK
5		5391.900	16.021	49.378	65.398	-8.602	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 18: SISO B: Transmit (802.11ax-160BW_72.1Mbps)-Channel 50 (5250MHz)

Vertical

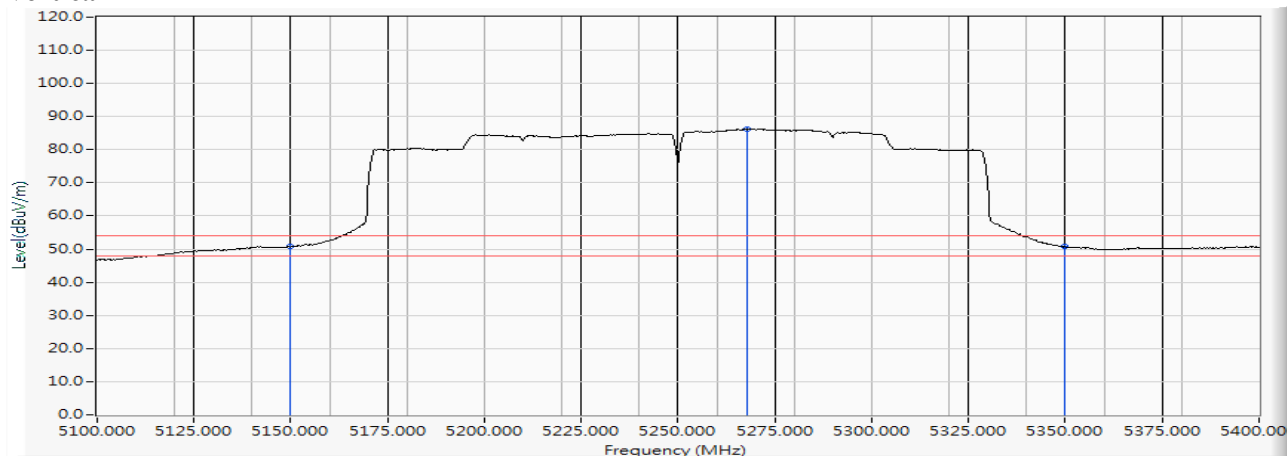


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	35.491	50.798	-3.202	54.000	AVERAGE
2	*	5268.000	15.721	70.448	86.169	--	--	AVERAGE
3		5350.000	15.912	34.780	50.692	-3.308	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 18: SISO B: Transmit (802.11ax-160BW_72.1Mbps)-Channel 114 (5570MHz)

Horizontal

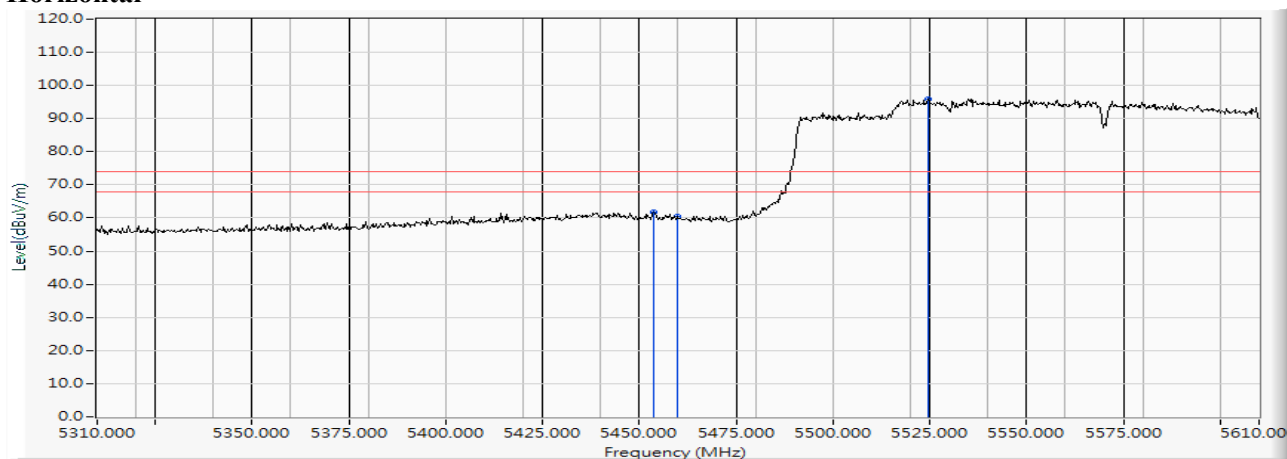


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5453.700	16.169	45.757	61.926	-12.074	74.000	PEAK
2		5460.000	16.185	44.359	60.544	-13.456	74.000	PEAK
3	*	5524.500	16.300	79.538	95.838	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 18: SISO B: Transmit (802.11ax-160BW_72.1Mbps)-Channel 114 (5570MHz)

Horizontal

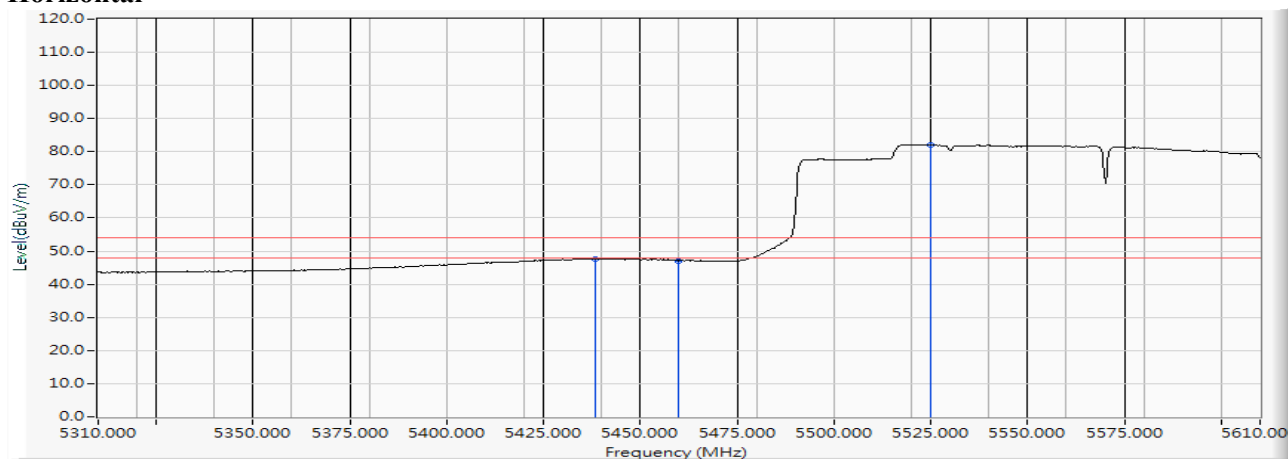


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5438.400	16.120	31.645	47.765	-6.235	54.000	AVERAGE
2		5460.000	16.185	30.943	47.128	-6.872	54.000	AVERAGE
3	*	5524.800	16.300	65.738	82.039	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 18: SISO B: Transmit (802.11ax-160BW_72.1Mbps)-Channel 114 (5570MHz)

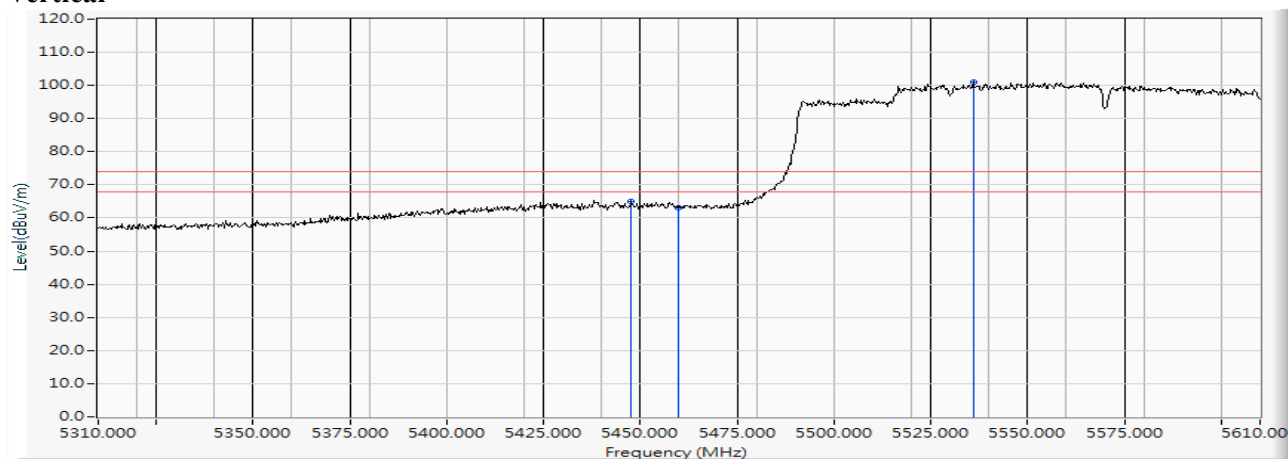Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5447.700	16.149	48.776	64.926	-9.074	74.000	PEAK
2		5460.000	16.185	47.009	63.194	-10.806	74.000	PEAK
3	*	5535.900	16.315	84.592	100.907	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 18: SISO B: Transmit (802.11ax-160BW_72.1Mbps)-Channel 114 (5570MHz)

Vertical

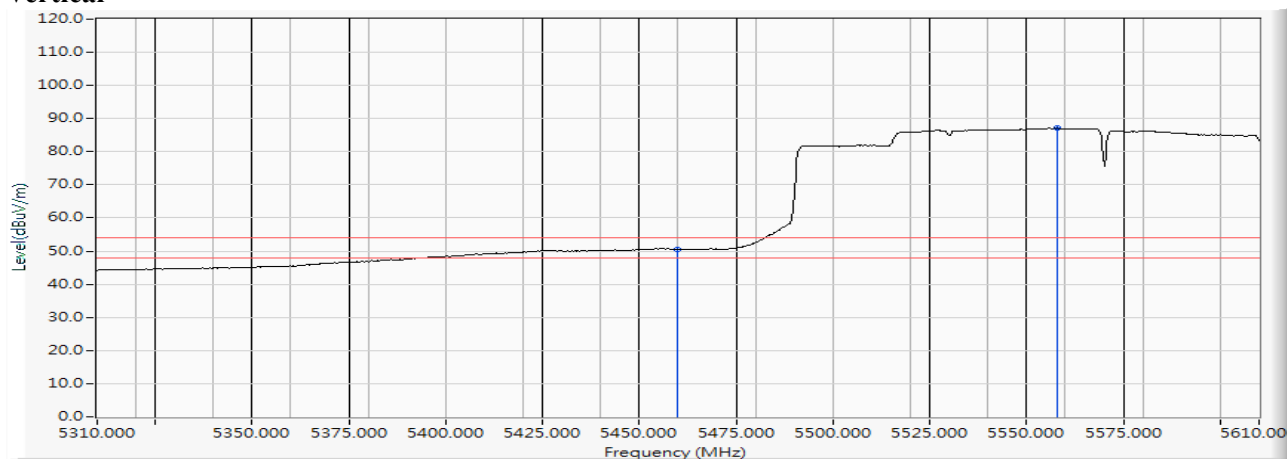


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5460.000	16.185	34.364	50.549	-3.451	54.000	AVERAGE
2	*	5557.800	16.325	70.752	87.077	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 18: SISO B: Transmit (802.11ax-160BW_72.1Mbps)-Channel 114 (5570MHz)


Horizontal

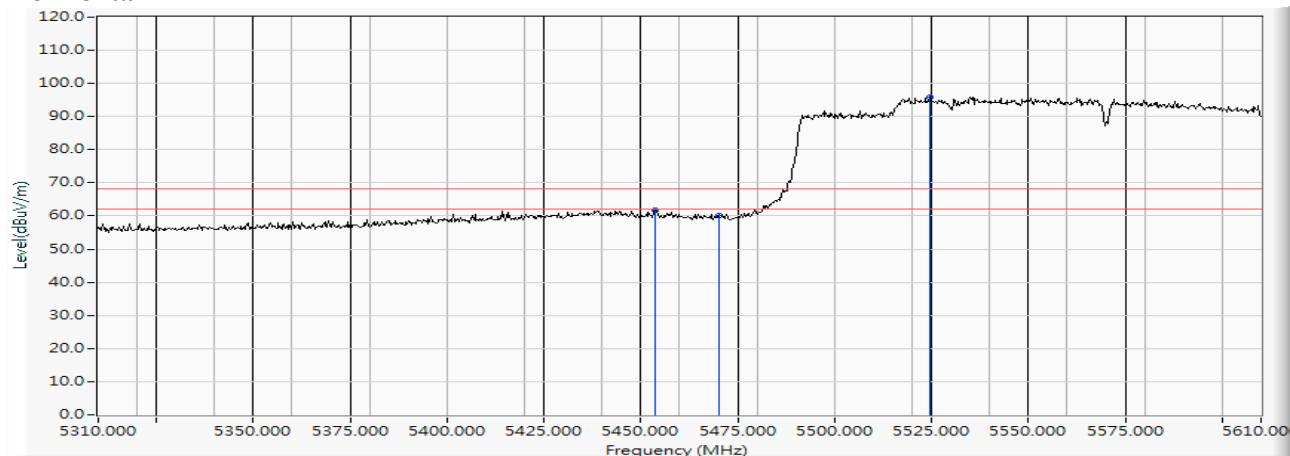

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5453.700	16.169	45.757	61.926	-6.294	68.220	PEAK
2		5470.000	16.200	43.865	60.065	-8.155	68.220	PEAK
3	*	5524.500	16.300	79.538	95.838	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 18: SISO B: Transmit (802.11ax-160BW_72.1Mbps)-Channel 114 (5570MHz)


Vertical

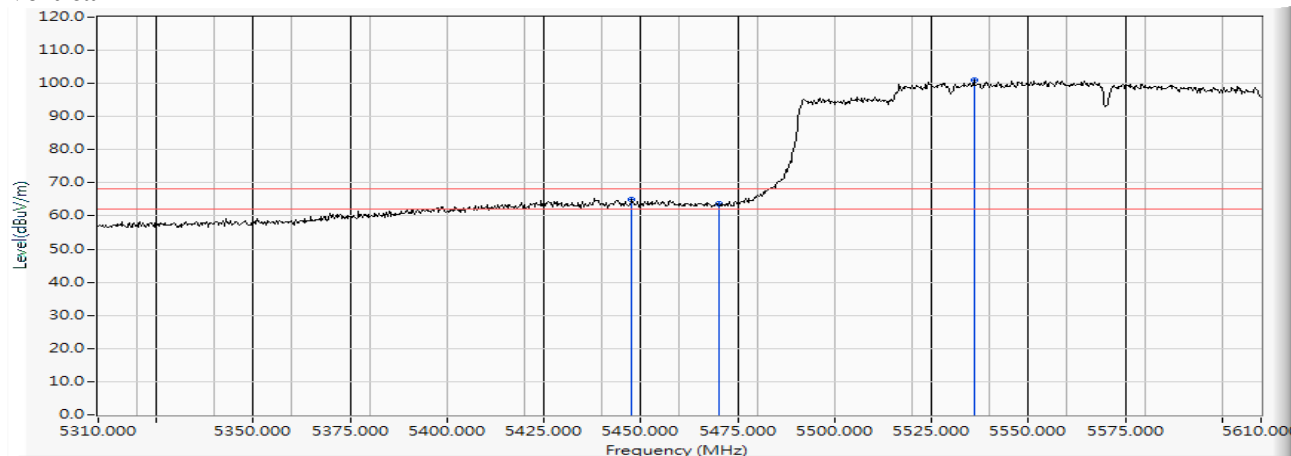

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5447.700	16.149	48.776	64.926	-3.294	68.220	PEAK
2		5470.000	16.200	47.405	63.605	-4.615	68.220	PEAK
3	*	5535.900	16.315	84.592	100.907	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps)-Channel 36 (5180MHz)

Horizontal

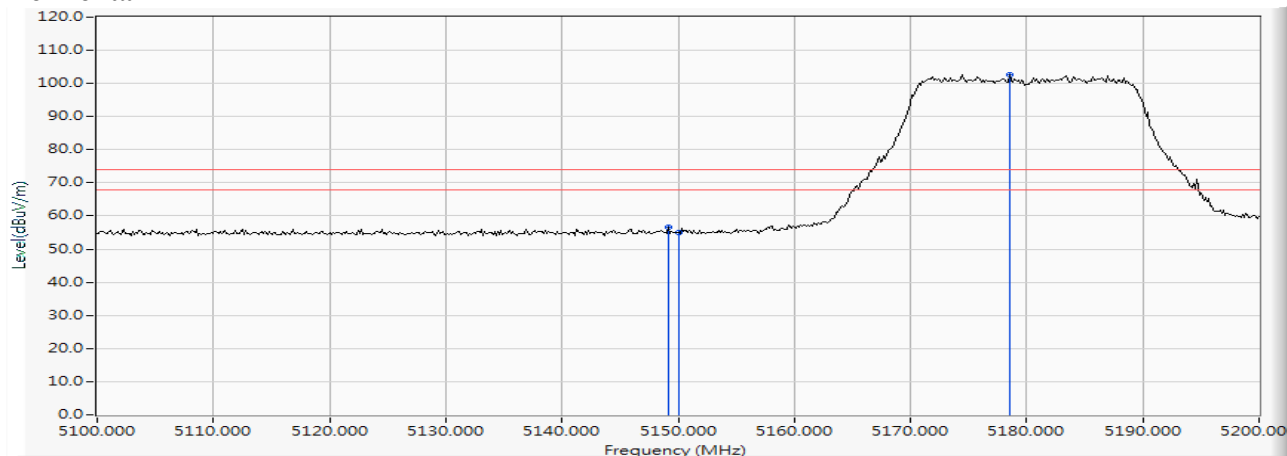


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5149.130	15.302	41.196	56.498	-17.502	74.000	PEAK
2		5150.000	15.307	39.755	55.062	-18.938	74.000	PEAK
3	*	5178.551	15.386	87.197	102.582	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps)-Channel 36 (5180MHz)

Horizontal

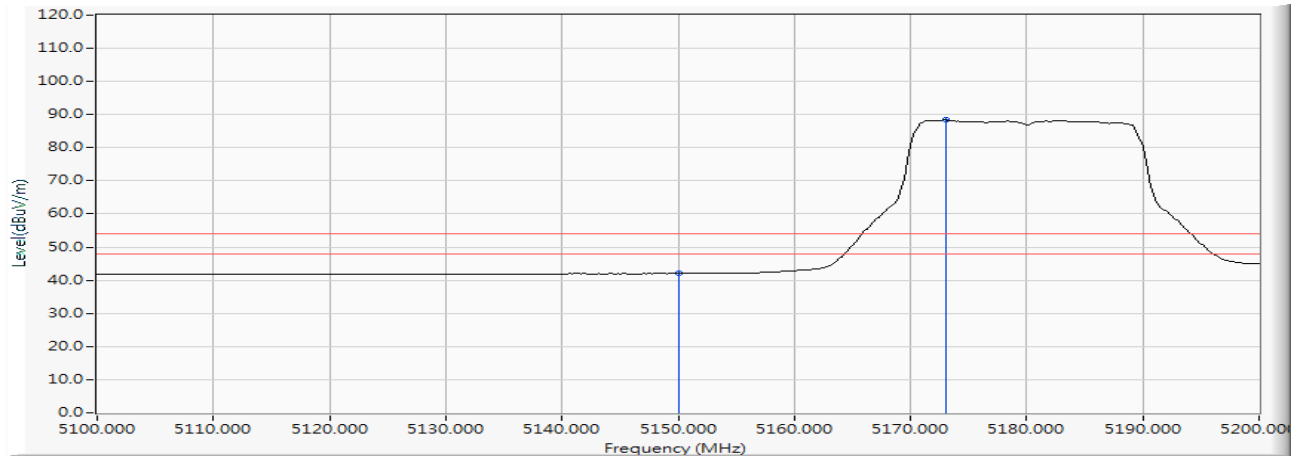


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	26.712	42.019	-11.981	54.000	AVERAGE
2	*	5173.043	15.362	72.990	88.351	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps)-Channel 36 (5180MHz)

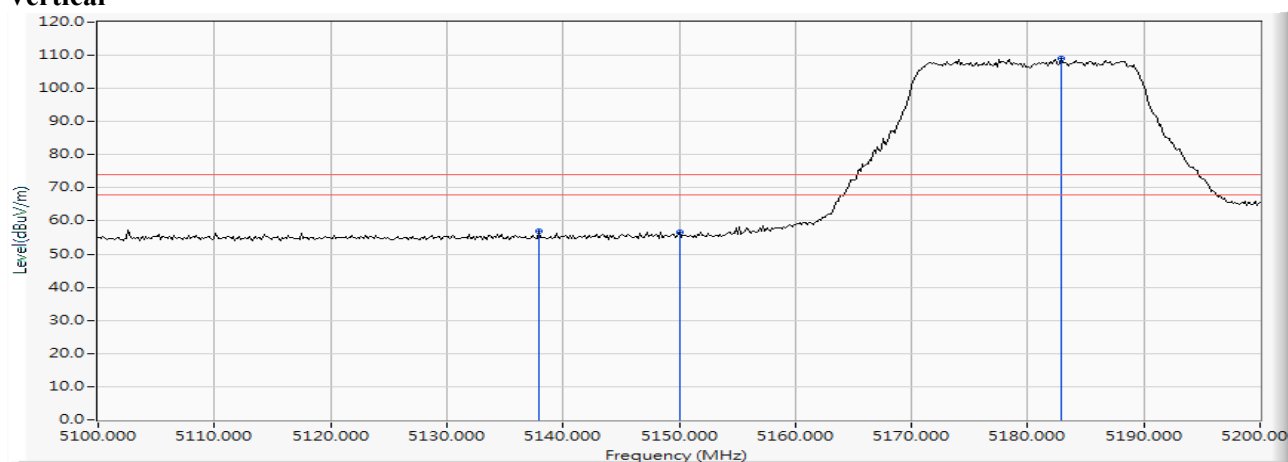
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5137.971	15.239	41.613	56.852	-17.148	74.000	PEAK
2		5150.000	15.307	41.290	56.597	-17.403	74.000	PEAK
3	*	5182.899	15.405	93.634	109.039	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/09
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps)-Channel 36 (5180MHz)

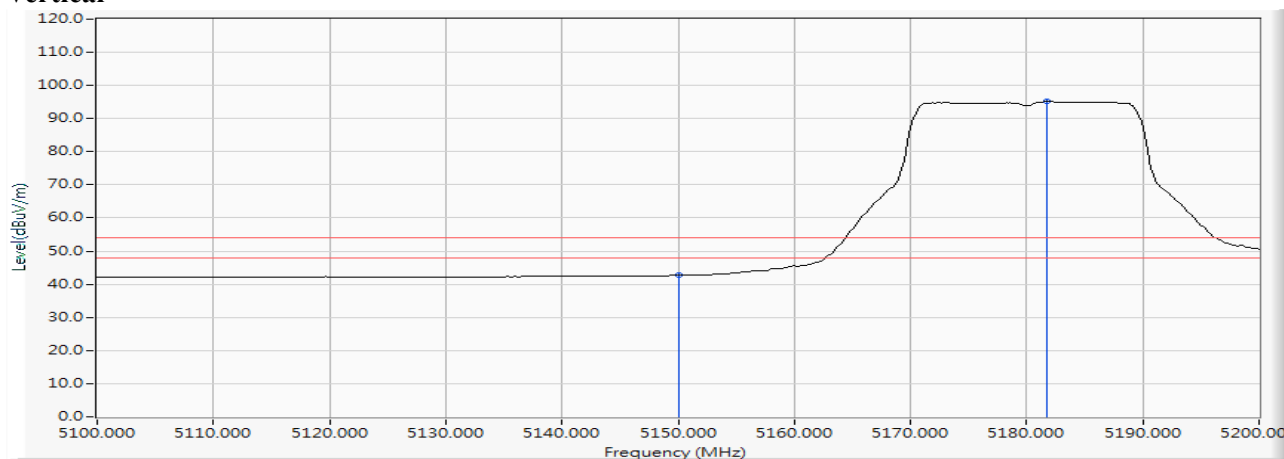Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	27.353	42.660	-11.340	54.000	AVERAGE
2	*	5181.739	15.400	79.800	95.200	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps)-Channel 64 (5320MHz)

Horizontal

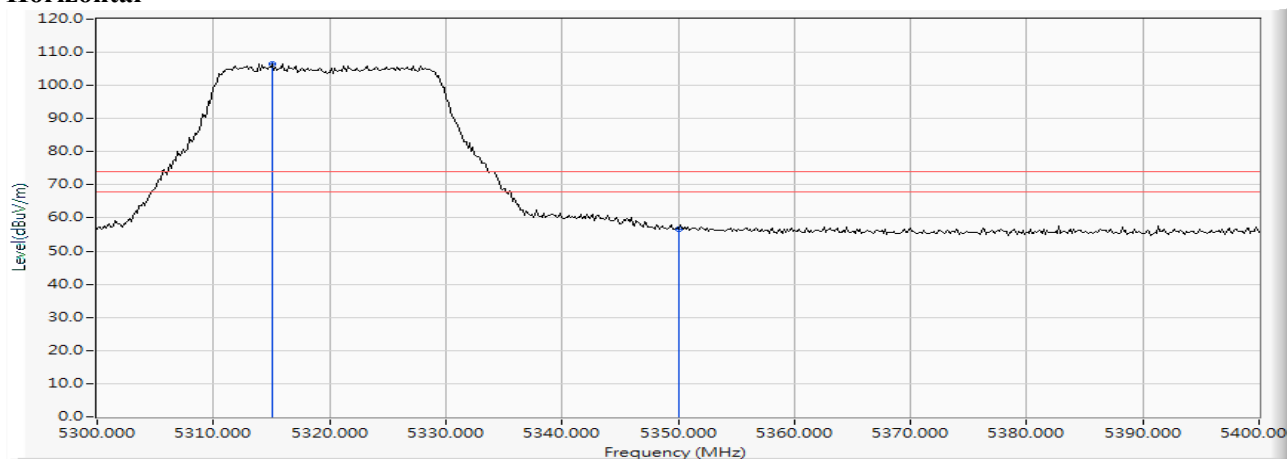


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5315.072	15.834	90.745	106.579	--	--	PEAK
2		5350.000	15.912	40.862	56.774	-17.226	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps)-Channel 64 (5320MHz)

Horizontal

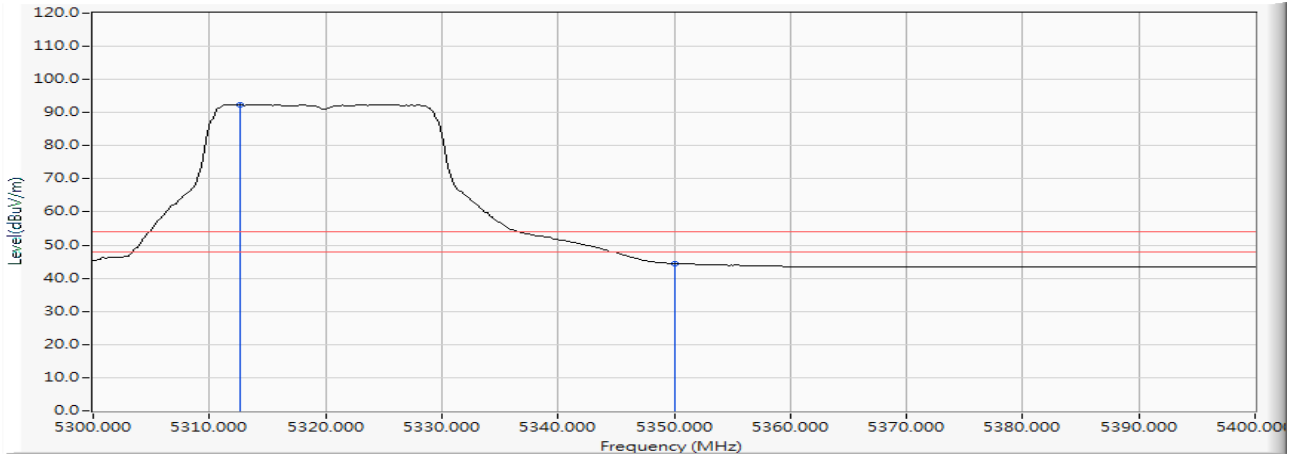


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5312.609	15.827	76.664	92.491	--	--	AVERAGE
2		5350.000	15.912	28.554	44.466	-9.534	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps)-Channel 64 (5320MHz)

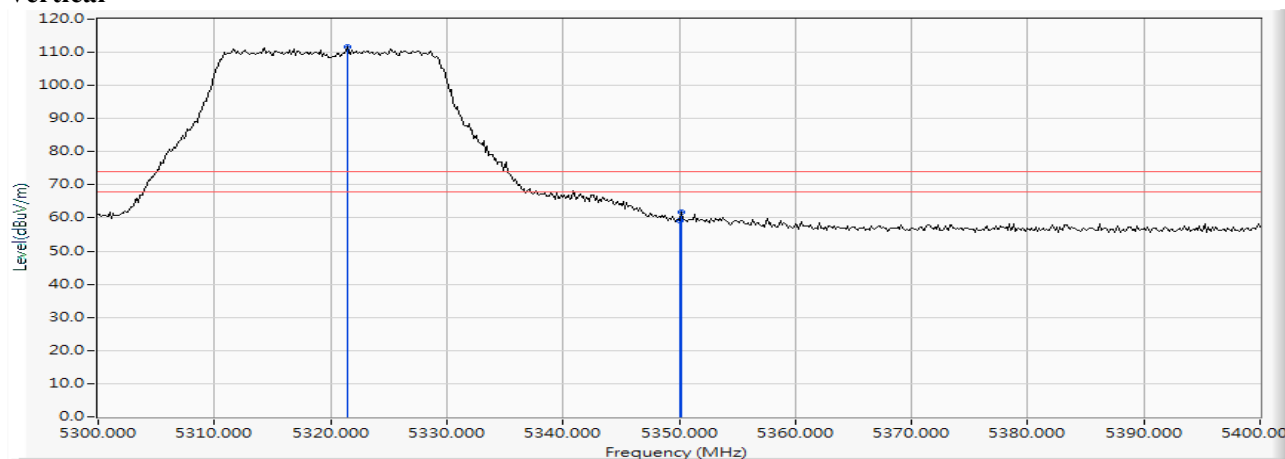
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5321.449	15.855	95.653	111.508	--	--	PEAK
2		5350.000	15.912	43.368	59.280	-14.720	74.000	PEAK
3		5350.145	15.912	45.756	61.669	-12.331	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps)-Channel 64 (5320MHz)

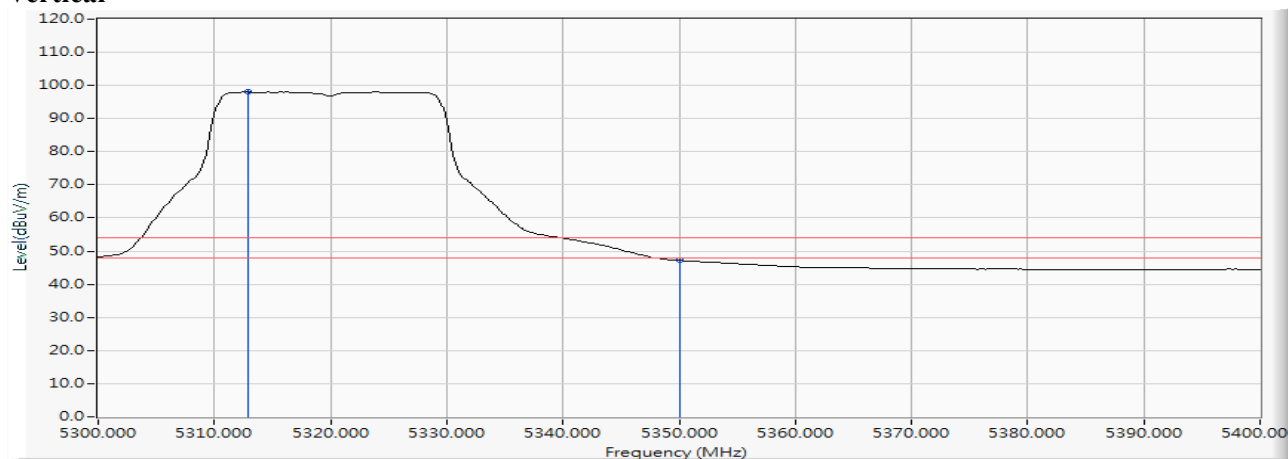Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5312.899	15.827	82.257	98.084	--	--	AVERAGE
2		5350.000	15.912	31.255	47.167	-6.833	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps)-Channel 100 (5500MHz)

Horizontal

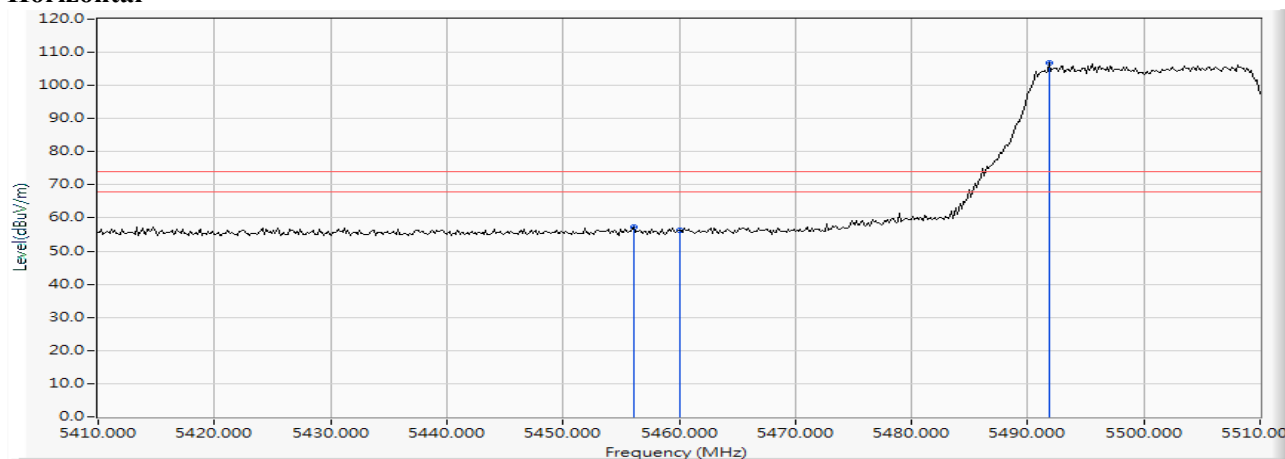


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5456.087	16.177	41.100	57.277	-16.723	74.000	PEAK
2		5460.000	16.185	40.072	56.257	-17.743	74.000	PEAK
3	*	5491.884	16.256	90.603	106.860	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps)-Channel 100 (5500MHz)

Horizontal

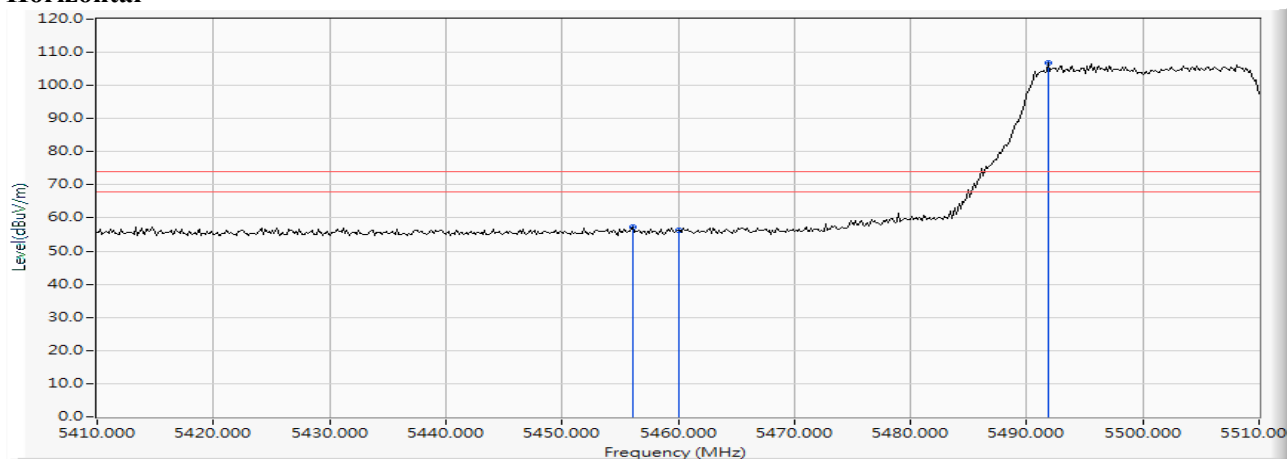


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5456.087	16.177	41.100	57.277	-16.723	74.000	PEAK
2		5460.000	16.185	40.072	56.257	-17.743	74.000	PEAK
3	*	5491.884	16.256	90.603	106.860	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps)-Channel 100 (5500MHz)

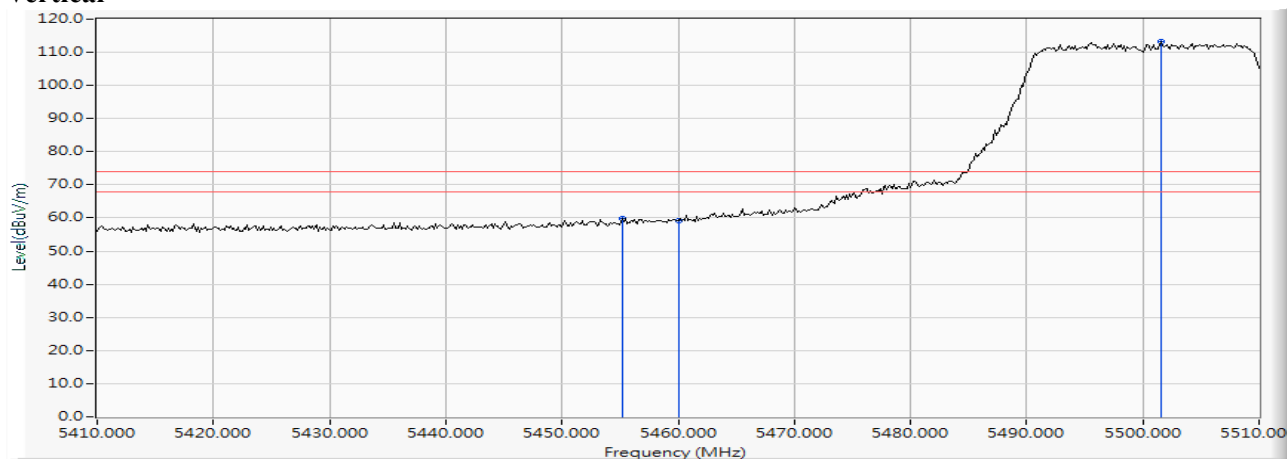
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5455.217	16.174	43.694	59.868	-14.132	74.000	PEAK
2		5460.000	16.185	42.932	59.117	-14.883	74.000	PEAK
3	*	5501.594	16.272	96.950	113.222	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps)-Channel 100 (5500MHz)

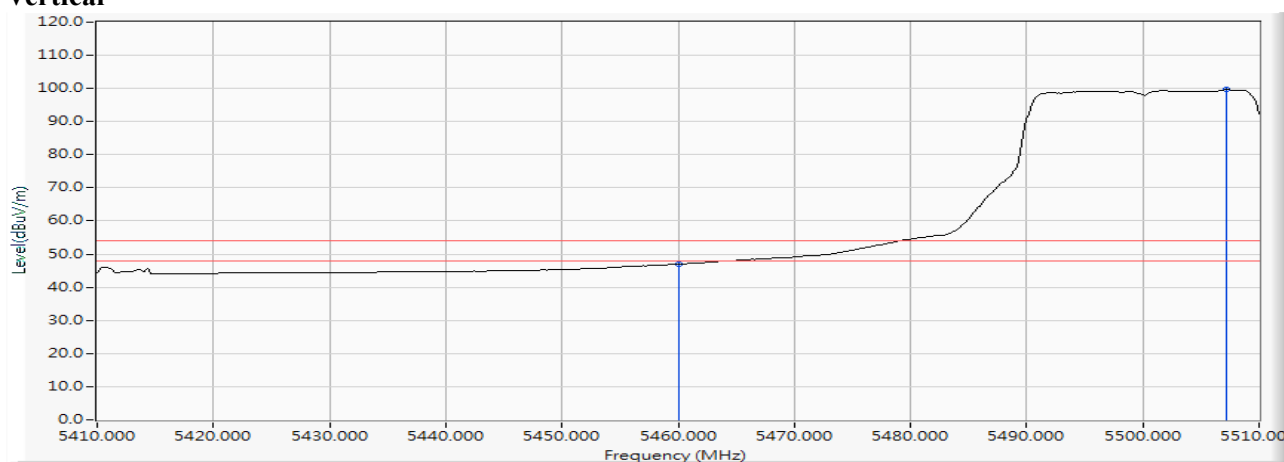Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5460.000	16.185	30.807	46.992	-7.008	54.000	AVERAGE
2	*	5507.246	16.274	83.358	99.632	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps)-Channel 100 (5500MHz)

Horizontal

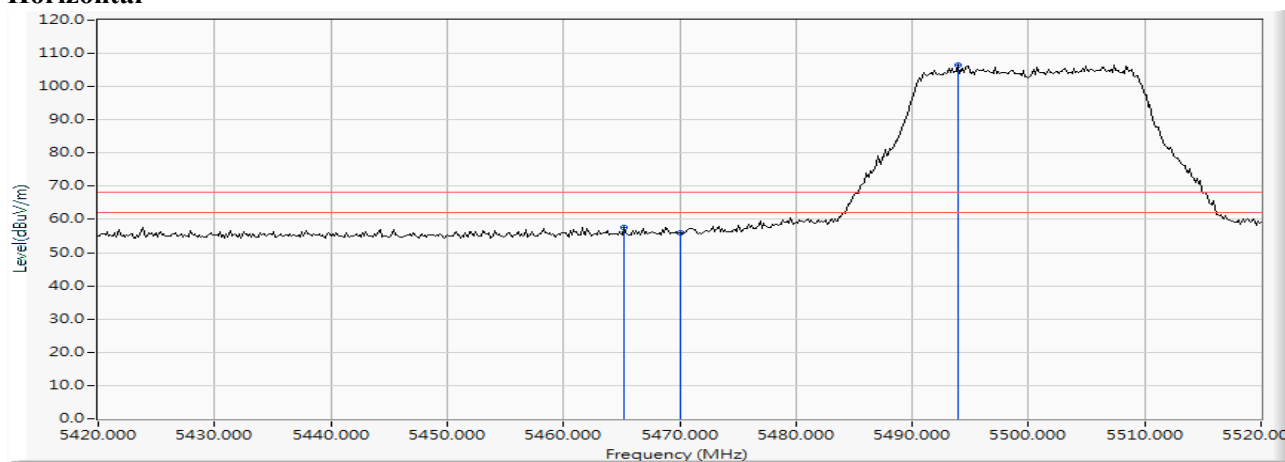

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5465.217	16.192	41.299	57.491	-10.729	68.220	PEAK
2		5470.000	16.200	39.745	55.945	-12.275	68.220	PEAK
3	*	5493.913	16.262	90.337	106.599	--	--	PEAK


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps)-Channel 100 (5500MHz)

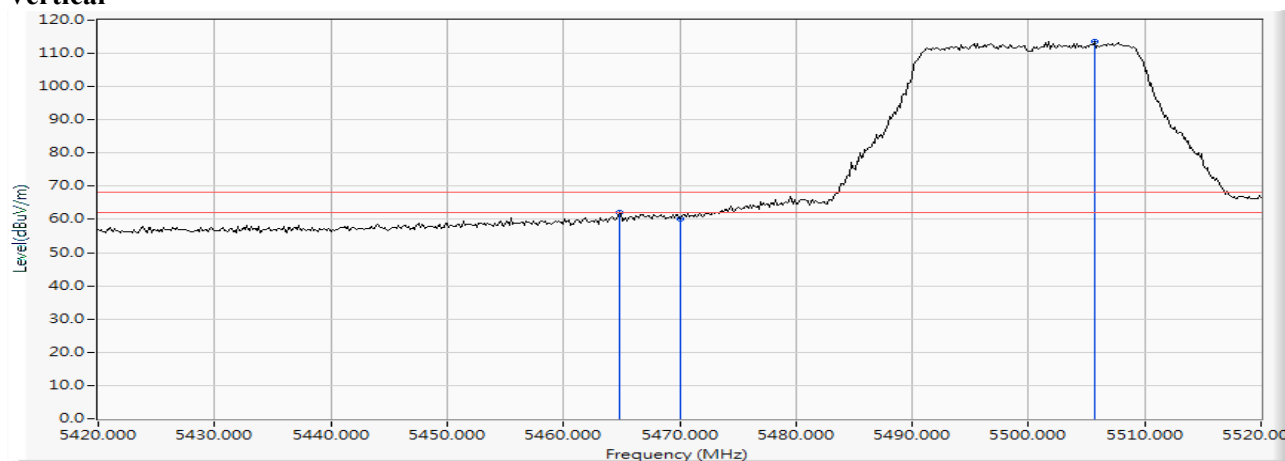Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5464.783	16.192	45.867	62.058	-6.162	68.220	PEAK
2		5470.000	16.200	44.068	60.268	-7.952	68.220	PEAK
3	*	5505.652	16.273	97.380	113.653	--	--	PEAK


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps)-Channel 140 (5700MHz)

Horizontal

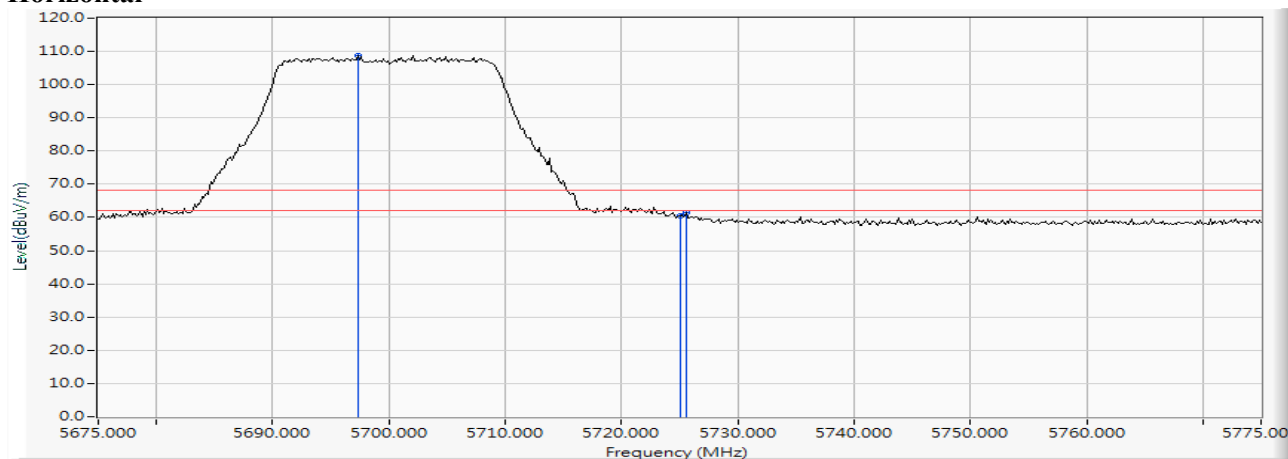

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5697.319	16.499	92.091	108.589	--	--	PEAK
2		5725.000	16.544	43.800	60.344	-7.876	68.220	PEAK
3		5725.580	16.546	44.874	61.419	-6.801	68.220	PEAK


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps)-Channel 140 (5700MHz)

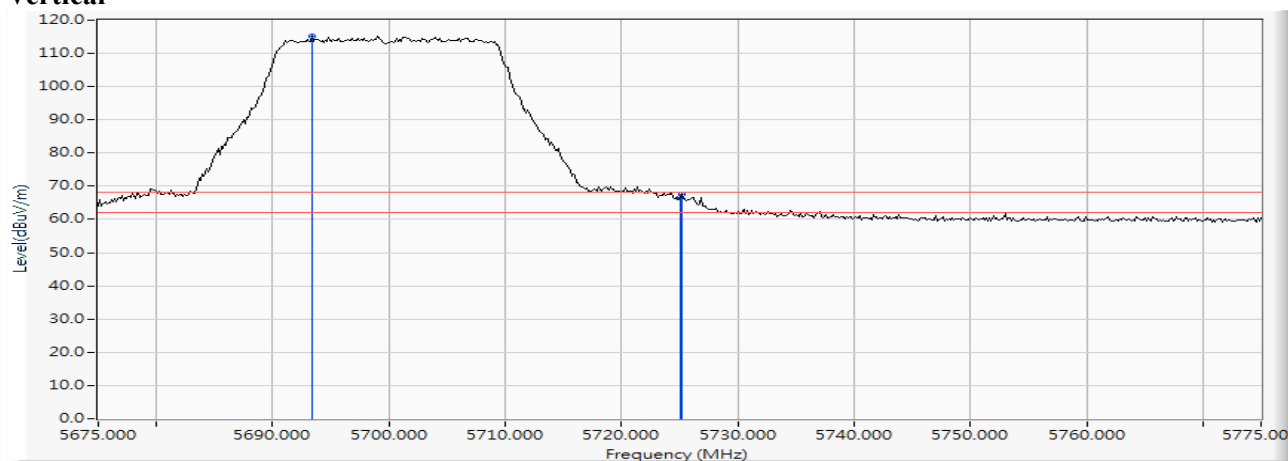Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5693.406	16.494	98.668	115.161	--	--	PEAK
2		5725.000	16.544	50.187	66.731	-1.489	68.220	PEAK
3		5725.145	16.544	51.175	67.719	-0.501	68.220	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps)-Channel 149 (5745MHz)


Horizontal

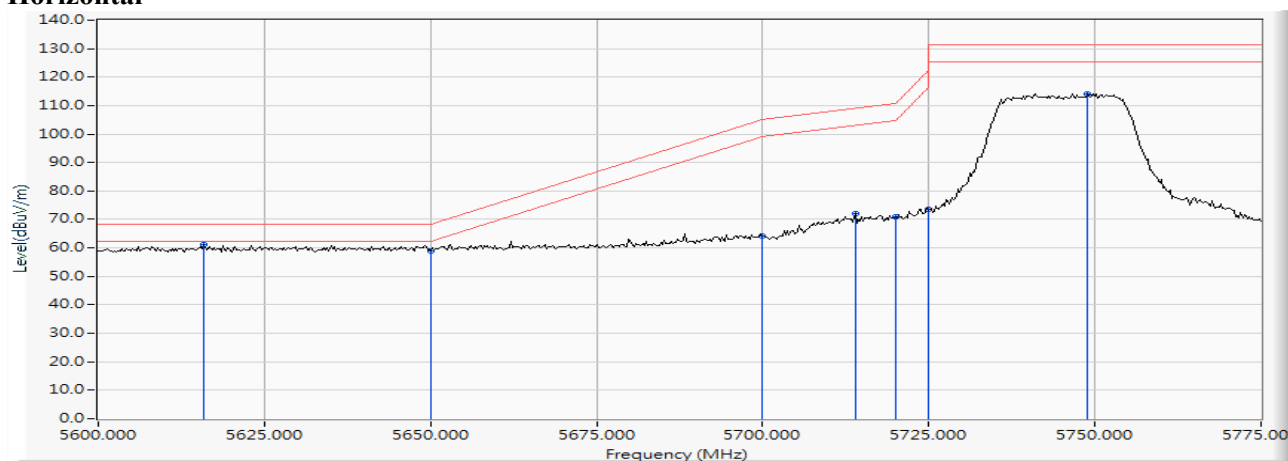

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5615.978	16.402	44.635	61.037	-7.183	68.220	PEAK
2		5650.000	16.447	42.666	59.113	-9.107	68.220	PEAK
3		5700.000	16.502	47.597	64.099	-41.101	105.200	PEAK
4		5713.877	16.523	55.581	72.104	-36.982	109.086	PEAK
5		5720.000	16.535	54.502	71.037	-39.763	110.800	PEAK
6		5725.000	16.544	56.889	73.433	-48.767	122.200	PEAK
7	*	5748.877	16.566	97.688	114.254	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps)-Channel 149 (5745MHz)


Vertical

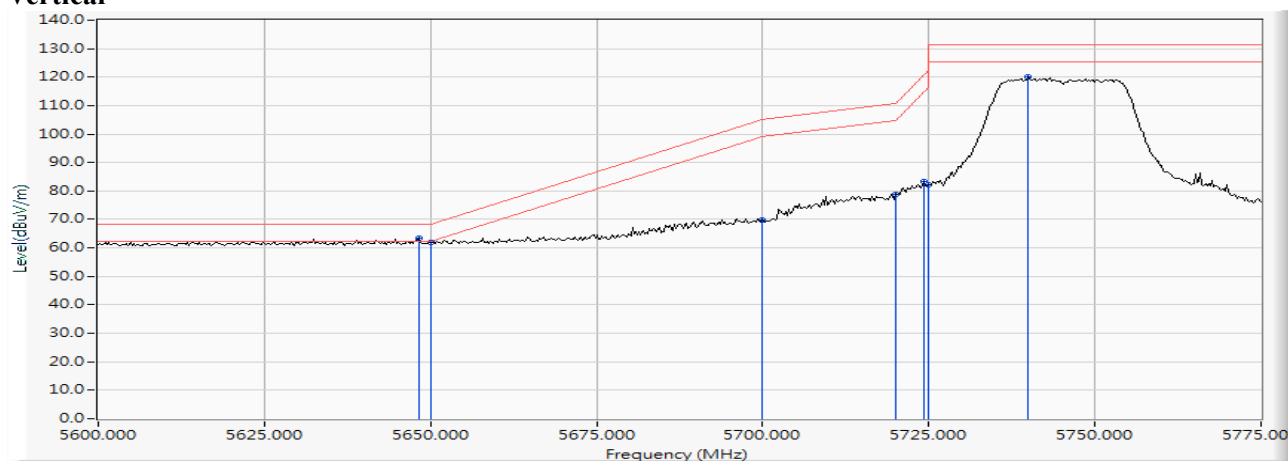

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5648.188	16.442	47.003	63.445	-4.775	68.220	PEAK
2		5650.000	16.447	45.317	61.764	-6.456	68.220	PEAK
3		5700.000	16.502	53.440	69.942	-35.258	105.200	PEAK
4		5720.000	16.535	62.470	79.005	-31.795	110.800	PEAK
5		5724.275	16.543	66.730	83.273	-37.274	120.547	PEAK
6		5725.000	16.544	65.738	82.282	-39.918	122.200	PEAK
7	*	5740.000	16.555	103.364	119.920	--	--	PEAK


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps)-Channel 165 (5825MHz)

Horizontal

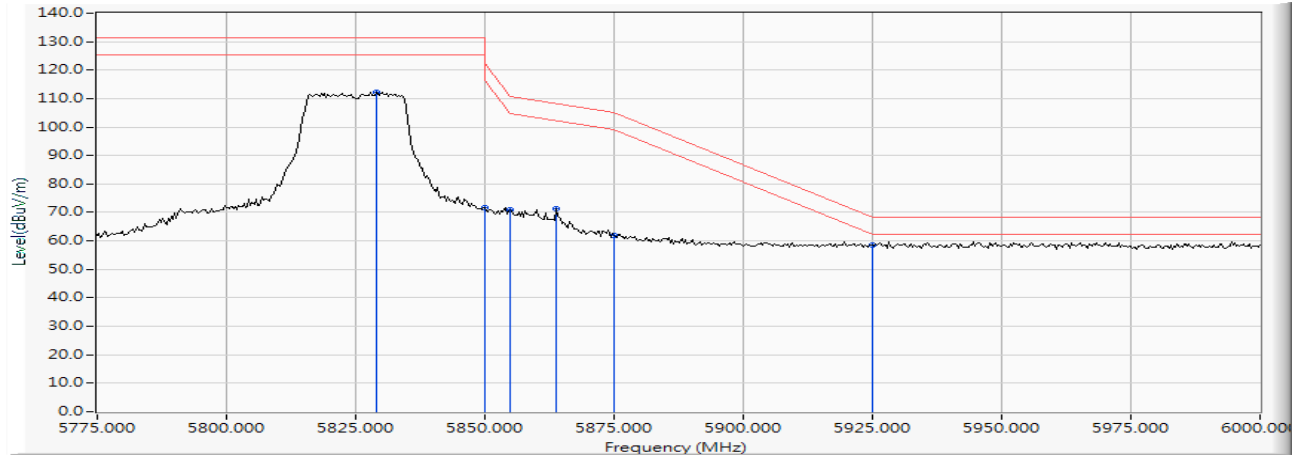

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5829.130	16.717	95.553	112.270	--	--	PEAK
2		5850.000	16.748	54.897	71.645	-50.555	122.200	PEAK
3		5855.000	16.758	54.016	70.774	-40.026	110.800	PEAK
4		5863.696	16.779	54.350	71.129	-37.236	108.365	PEAK
5		5875.000	16.807	45.232	62.040	-43.160	105.200	PEAK
6		5925.000	16.920	41.680	58.600	-9.600	68.200	PEAK


Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 23: MIMO: Transmit (802.11ax-20BW_17.2Mbps)-Channel 165 (5825MHz)

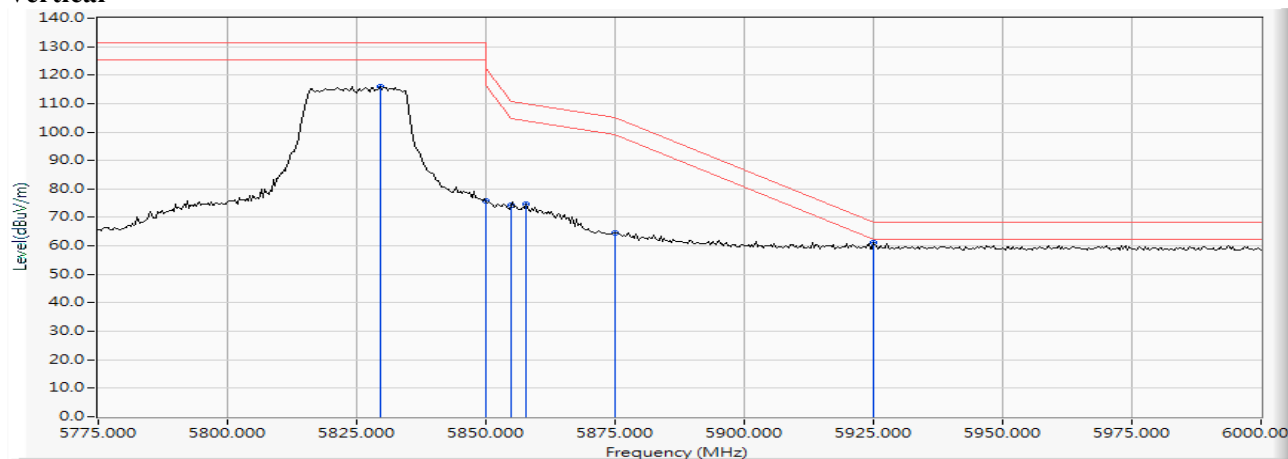Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5829.457	16.718	99.225	115.943	--	--	PEAK
2		5850.000	16.748	59.029	75.777	-46.423	122.200	PEAK
3		5855.000	16.758	57.698	74.456	-36.344	110.800	PEAK
4		5857.826	16.765	57.819	74.584	-35.425	110.009	PEAK
5		5875.000	16.807	47.701	64.509	-40.691	105.200	PEAK
6		5925.000	16.920	44.210	61.130	-7.070	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps)-Channel 38 (5190MHz)

Horizontal

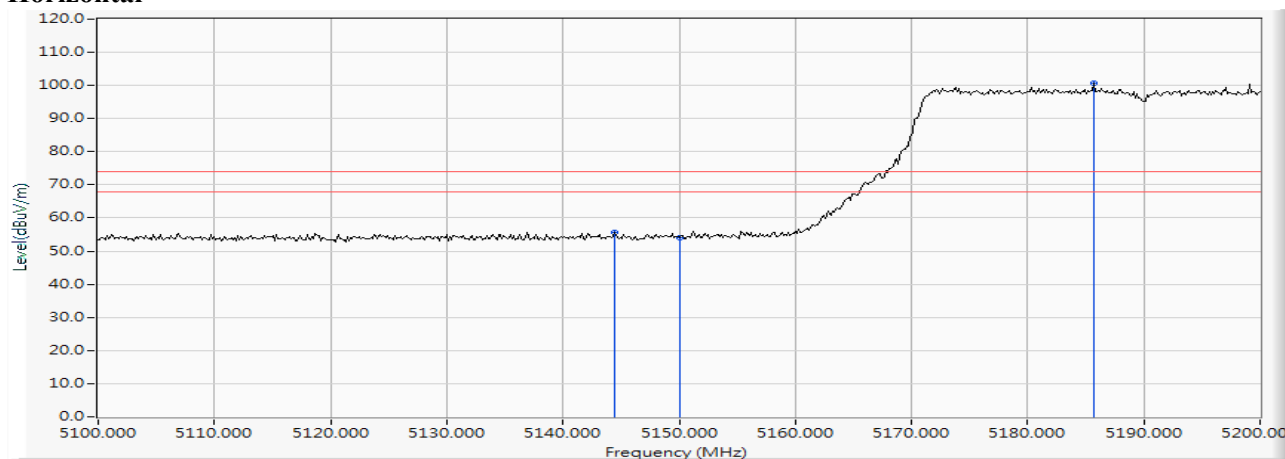


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5144.493	15.275	40.526	55.802	-18.198	74.000	PEAK
2		5150.000	15.307	38.880	54.187	-19.813	74.000	PEAK
3	*	5185.652	15.417	85.391	100.808	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps)-Channel 38 (5190MHz)

Horizontal

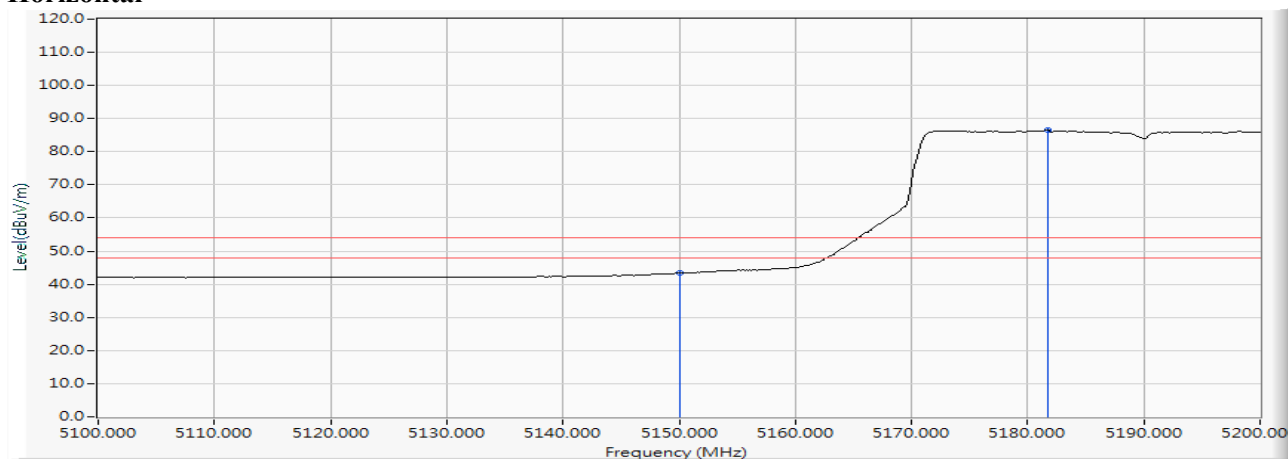


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	28.060	43.367	-10.633	54.000	AVERAGE
2	*	5181.739	15.400	71.087	86.487	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps)-Channel 38 (5190MHz)

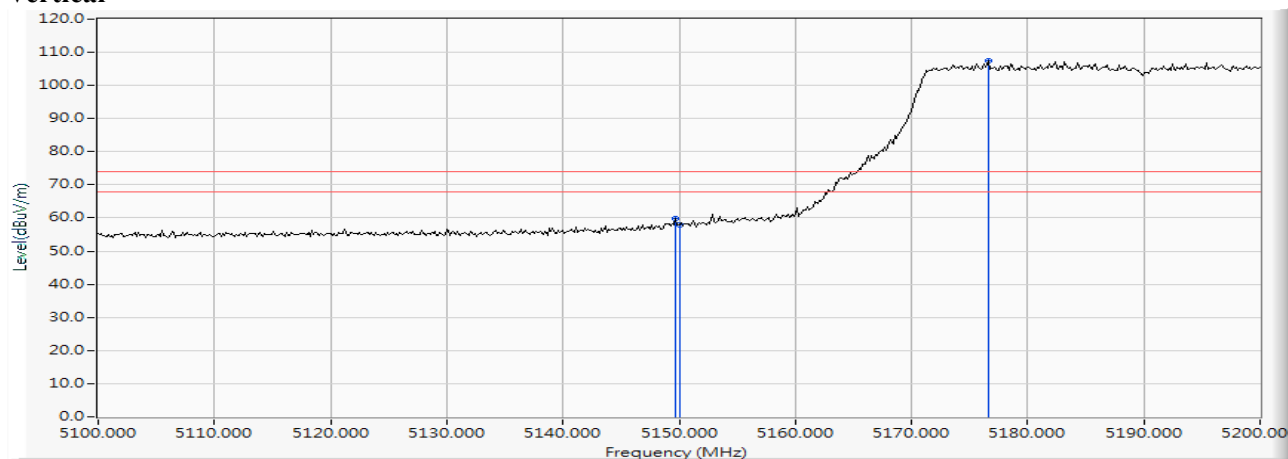
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5149.710	15.305	44.484	59.789	-14.211	74.000	PEAK
2		5150.000	15.307	42.587	57.894	-16.106	74.000	PEAK
3	*	5176.667	15.378	92.184	107.561	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps)-Channel 38 (5190MHz)

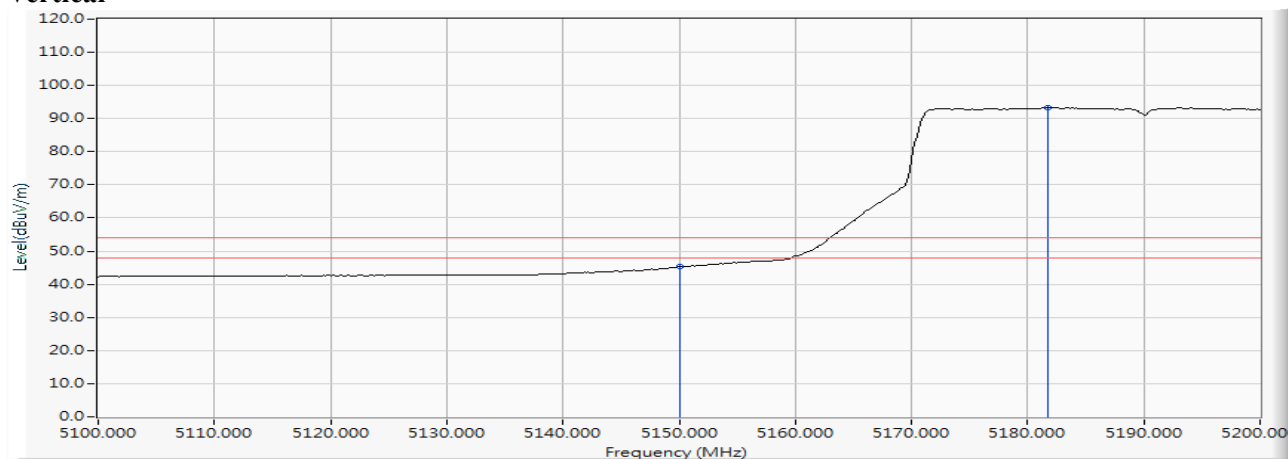Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	29.898	45.205	-8.795	54.000	AVERAGE
2	*	5181.739	15.400	77.943	93.343	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps)-Channel 62 (5310MHz)

Horizontal

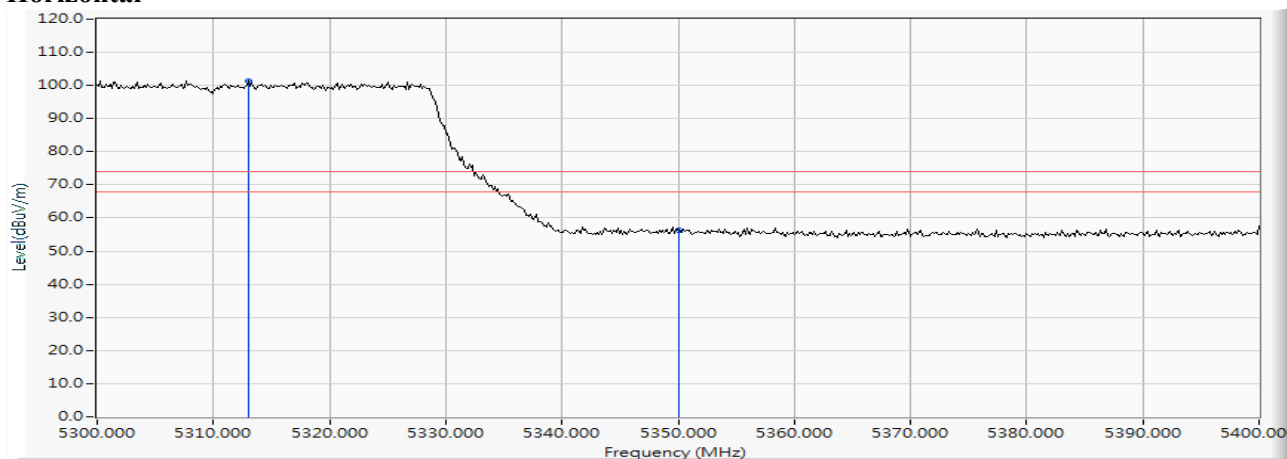


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5313.043	15.827	85.504	101.332	--	--	PEAK
2		5350.000	15.912	40.342	56.254	-17.746	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps)-Channel 62 (5310MHz)

Horizontal

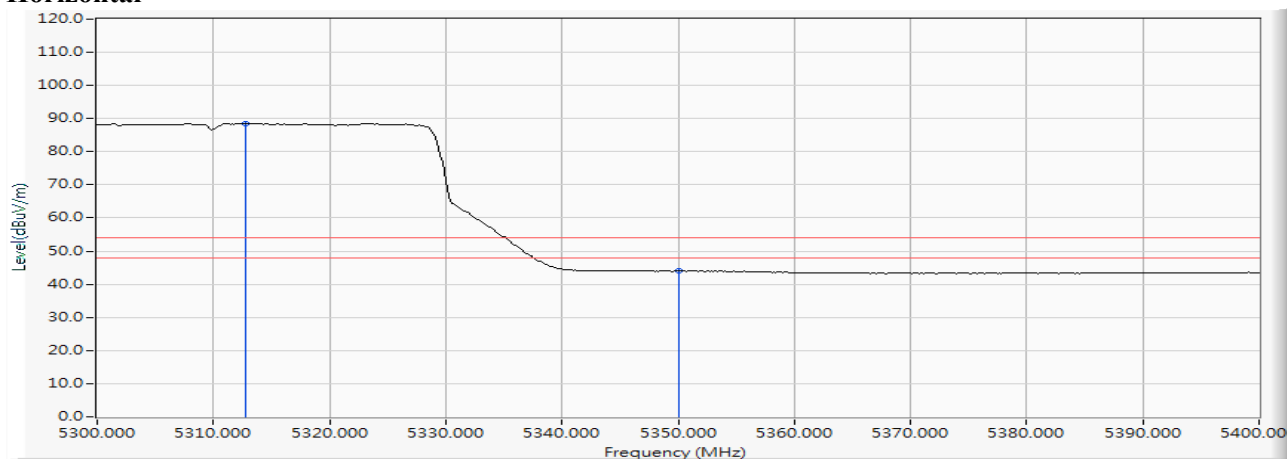


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5312.754	15.827	72.754	88.581	--	--	AVERAGE
2		5350.000	15.912	28.112	44.024	-9.976	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps)-Channel 62 (5310MHz)

Vertical

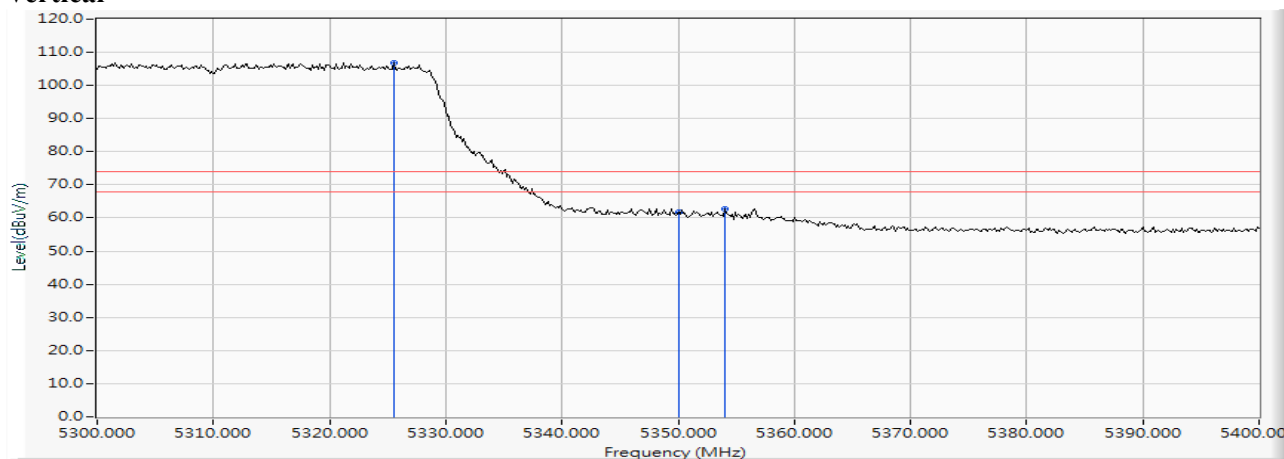


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5325.507	15.868	90.992	106.859	--	--	PEAK
2		5350.000	15.912	45.836	61.748	-12.252	74.000	PEAK
3		5354.058	15.925	46.963	62.888	-11.112	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps)-Channel 62 (5310MHz)

Vertical

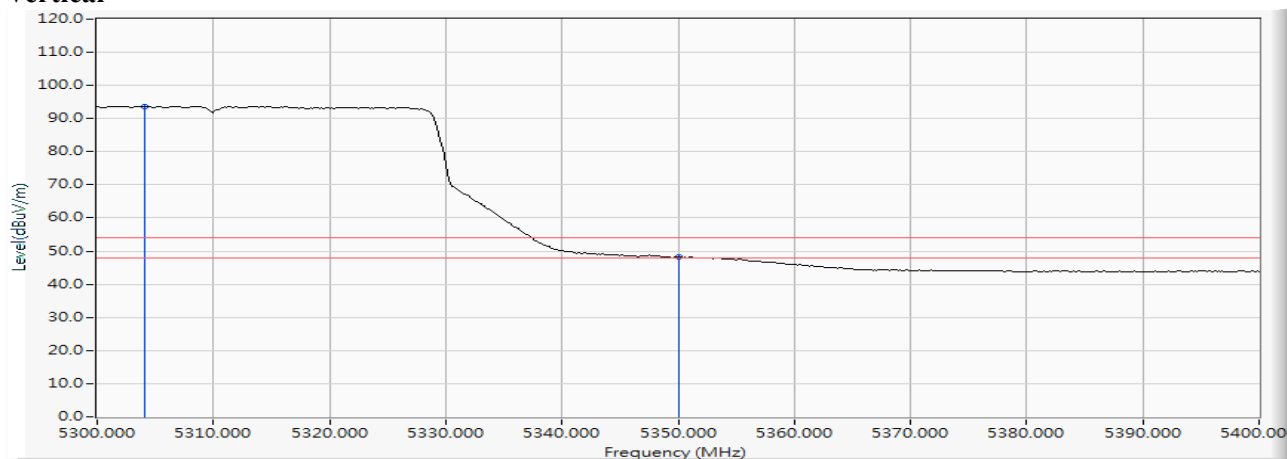


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5304.058	15.806	77.903	93.709	--	--	AVERAGE
2		5350.000	15.912	32.249	48.161	-5.839	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps)-Channel 102 (5510MHz)

Horizontal

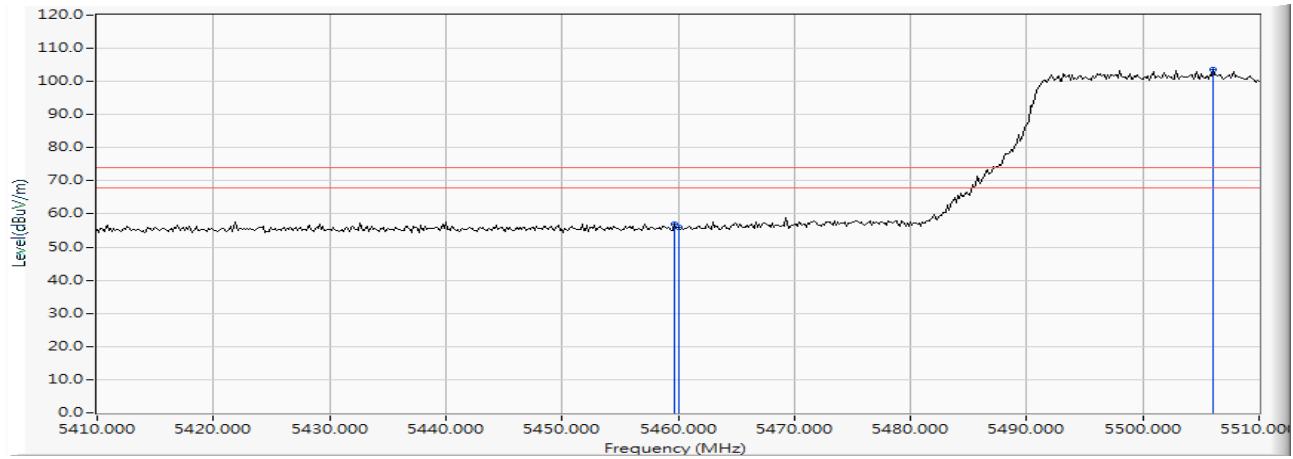


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5459.710	16.184	40.666	56.850	-17.150	74.000	PEAK
2		5460.000	16.185	39.650	55.835	-18.165	74.000	PEAK
3	*	5506.087	16.273	87.448	103.721	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps)-Channel 102 (5510MHz)

Horizontal

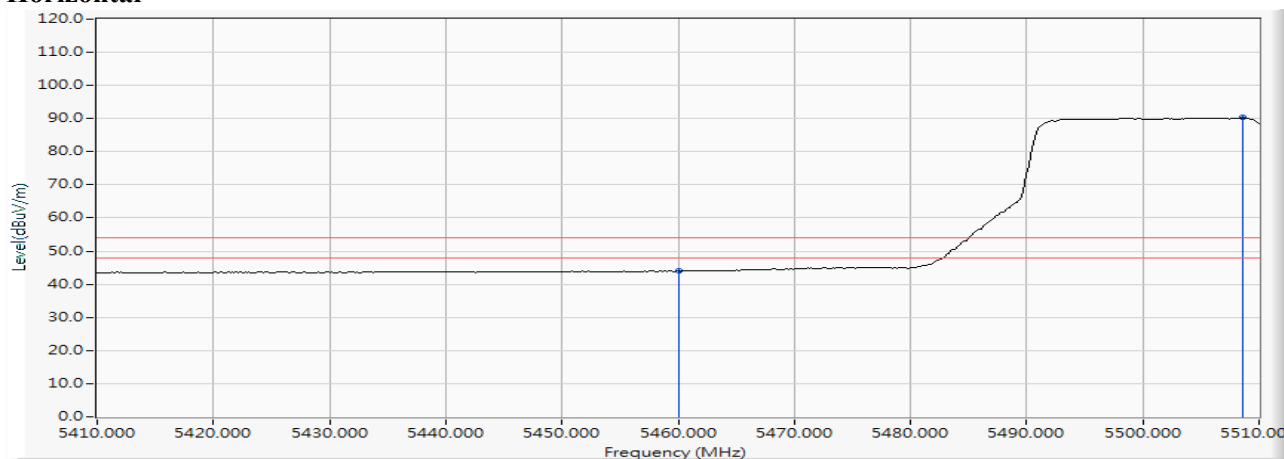


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5460.000	16.185	27.738	43.923	-10.077	54.000	AVERAGE
2	*	5508.551	16.274	73.990	90.264	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps)-Channel 102 (5510MHz)

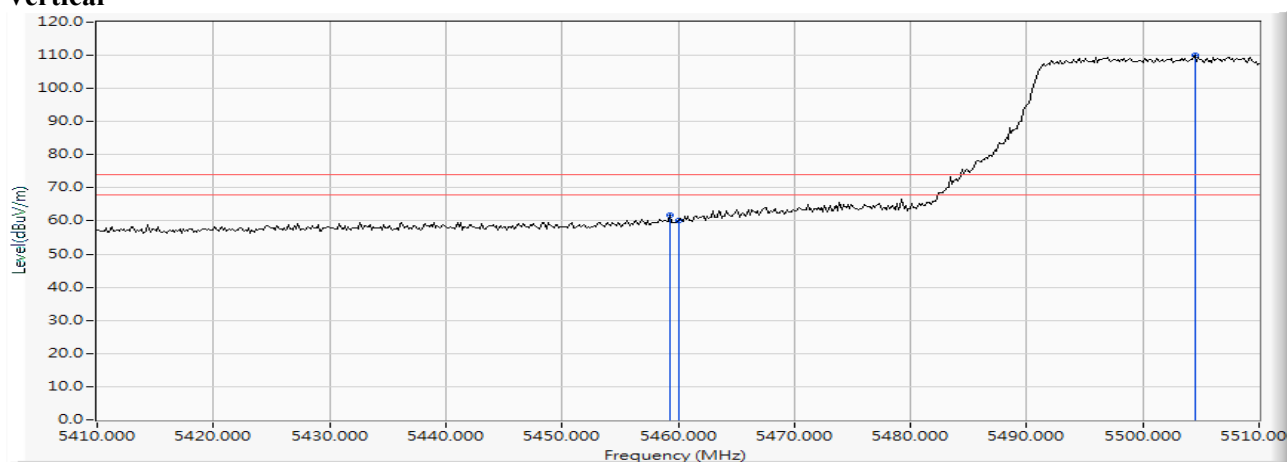
Vertical

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5459.275	16.183	45.636	61.819	-12.181	74.000	PEAK
2		5460.000	16.185	44.016	60.201	-13.799	74.000	PEAK
3	*	5504.493	16.273	93.805	110.078	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps)-Channel 102 (5510MHz)

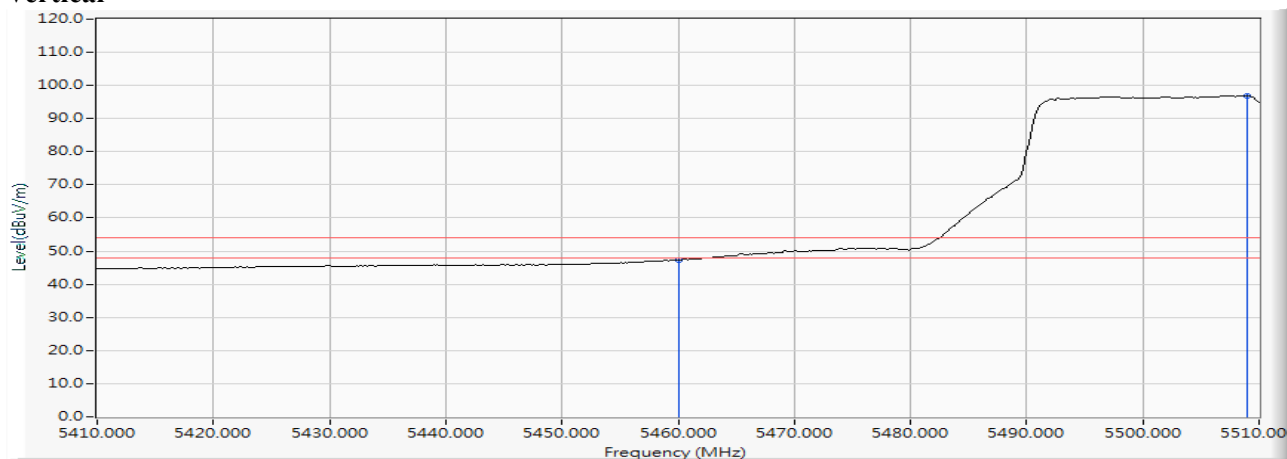Vertical


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5460.000	16.185	31.105	47.290	-6.710	54.000	AVERAGE
2	*	5508.986	16.274	80.626	96.900	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps)-Channel 102 (5510MHz)


Horizontal

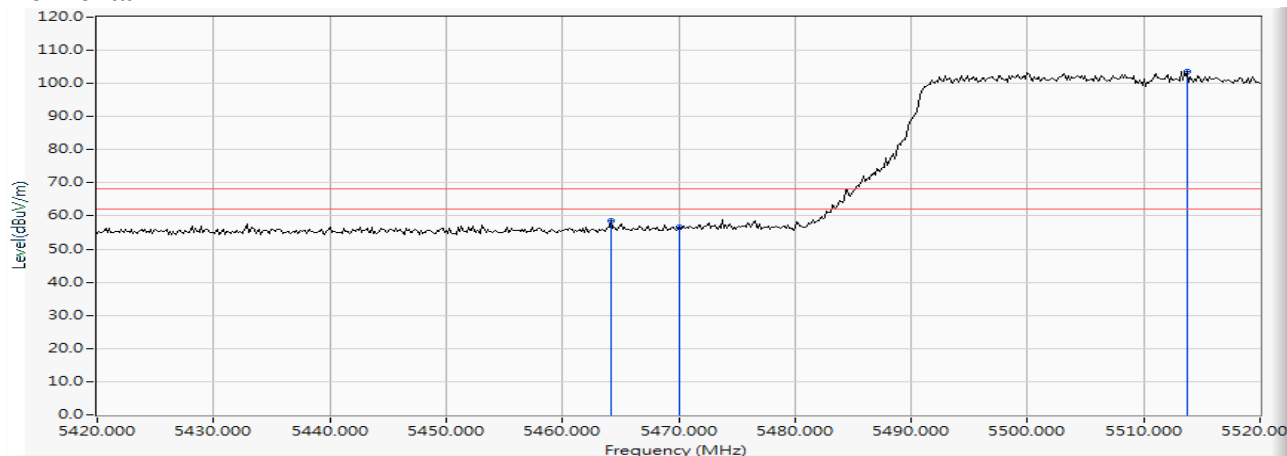

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5464.203	16.191	42.466	58.657	-9.563	68.220	PEAK
2		5470.000	16.200	40.269	56.469	-11.751	68.220	PEAK
3	*	5513.768	16.280	87.362	103.643	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps)-Channel 102 (5510MHz)


Vertical

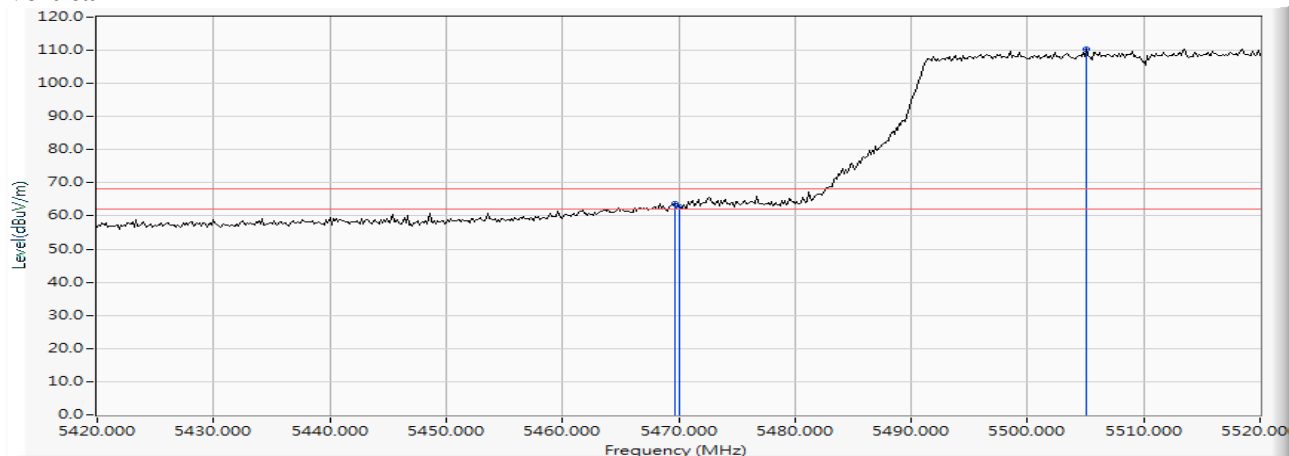

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5469.710	16.199	47.635	63.834	-4.386	68.220	PEAK
2		5470.000	16.200	46.689	62.889	-5.331	68.220	PEAK
3	*	5505.072	16.272	94.051	110.324	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps)-Channel 134 (5670MHz)


Horizontal

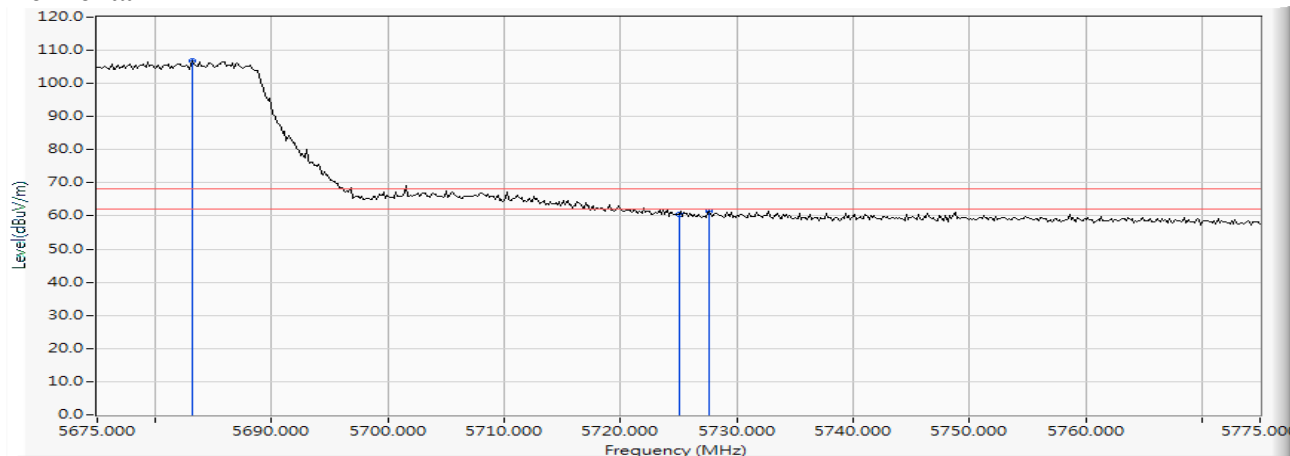

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5683.116	16.482	90.173	106.654	--	--	PEAK
2		5725.000	16.544	43.932	60.476	-7.744	68.220	PEAK
3		5727.609	16.548	44.892	61.440	-6.780	68.220	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps)-Channel 134 (5670MHz)


Vertical

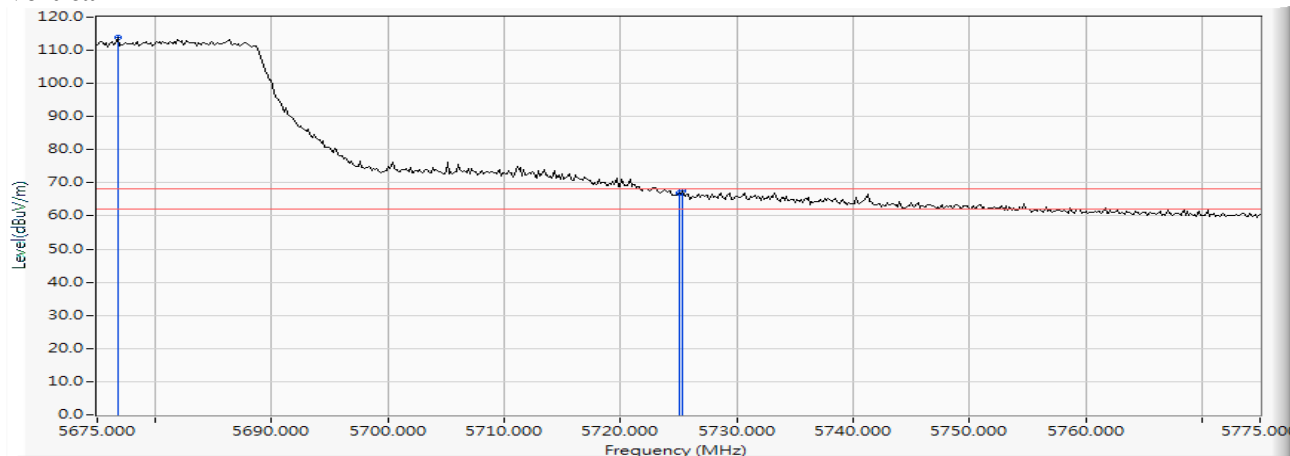

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5676.739	16.474	97.412	113.886	--	--	PEAK
2		5725.000	16.544	50.381	66.925	-1.295	68.220	PEAK
3		5725.290	16.544	50.905	67.450	-0.770	68.220	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps)-Channel 151 (5755MHz)


Horizontal

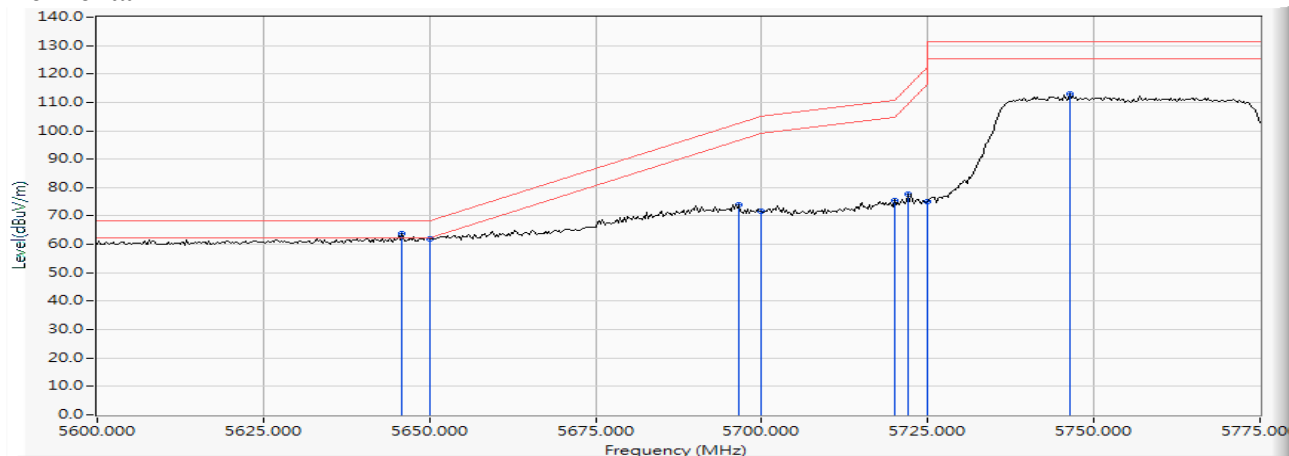

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5645.906	16.436	47.241	63.677	-4.543	68.220	PEAK
2		5650.000	16.447	45.445	61.892	-6.328	68.220	PEAK
3		5696.630	16.497	57.624	74.121	-28.587	102.708	PEAK
4		5700.000	16.502	55.003	71.505	-33.695	105.200	PEAK
5		5720.000	16.535	59.068	75.603	-35.197	110.800	PEAK
6		5721.993	16.539	61.178	77.717	-37.627	115.344	PEAK
7		5725.000	16.544	58.351	74.895	-47.305	122.200	PEAK
8	*	5746.341	16.562	96.458	113.020	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps)-Channel 151 (5755MHz)


Vertical

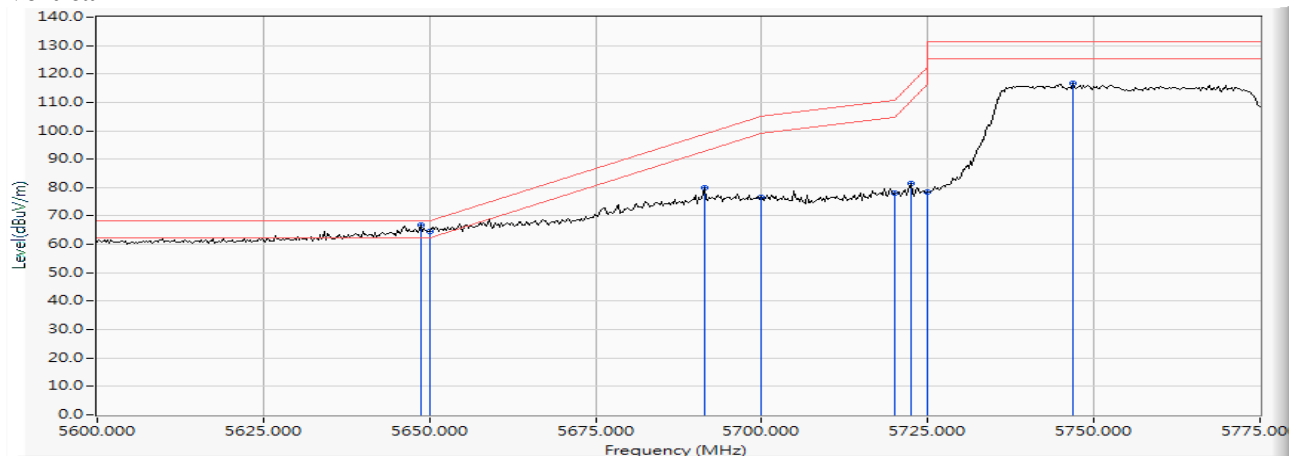

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	5648.696	16.444	50.546	66.989	-1.231	68.220	PEAK
2	5650.000	16.447	48.254	64.701	-3.519	68.220	PEAK
3	5691.304	16.490	63.529	80.020	-18.748	98.768	PEAK
4	5700.000	16.502	60.170	76.672	-28.528	105.200	PEAK
5	5720.000	16.535	61.374	77.909	-32.891	110.800	PEAK
6	5722.500	16.540	64.939	81.479	-35.021	116.500	PEAK
7	5725.000	16.544	61.821	78.365	-43.835	122.200	PEAK
8	5746.848	16.562	100.337	116.900	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps)-Channel 159 (5795MHz)


Horizontal

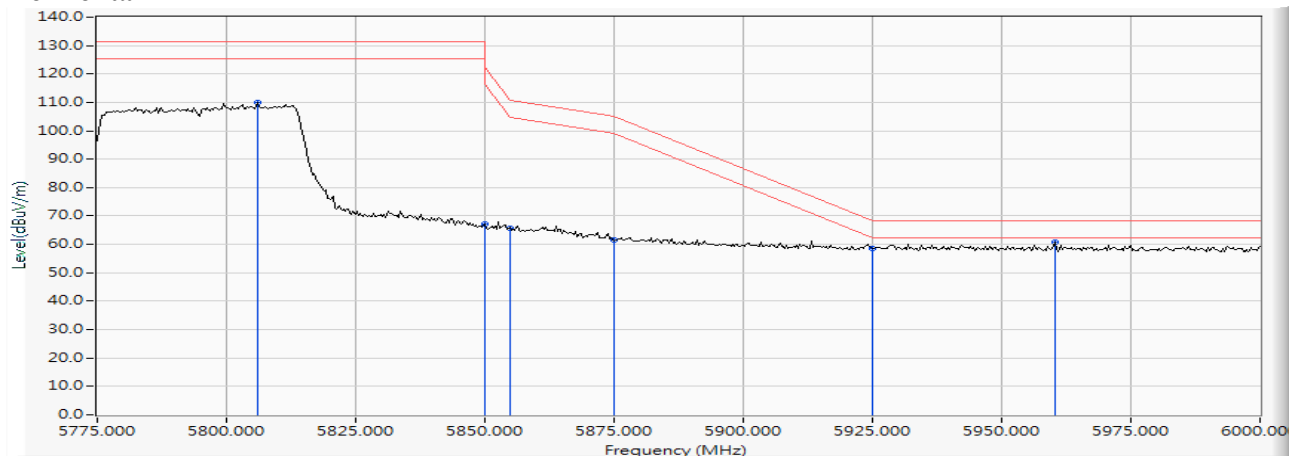

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5805.978	16.675	93.224	109.898	--	--	PEAK
2		5850.000	16.748	50.489	67.237	-54.963	122.200	PEAK
3		5855.000	16.758	48.987	65.745	-45.055	110.800	PEAK
4		5875.000	16.807	44.778	61.586	-43.614	105.200	PEAK
5		5925.000	16.920	41.808	58.728	-9.472	68.200	PEAK
6		5960.217	16.973	43.775	60.748	-7.452	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 24: MIMO: Transmit (802.11ax-40BW_34.4Mbps)-Channel 159 (5795MHz)


Vertical

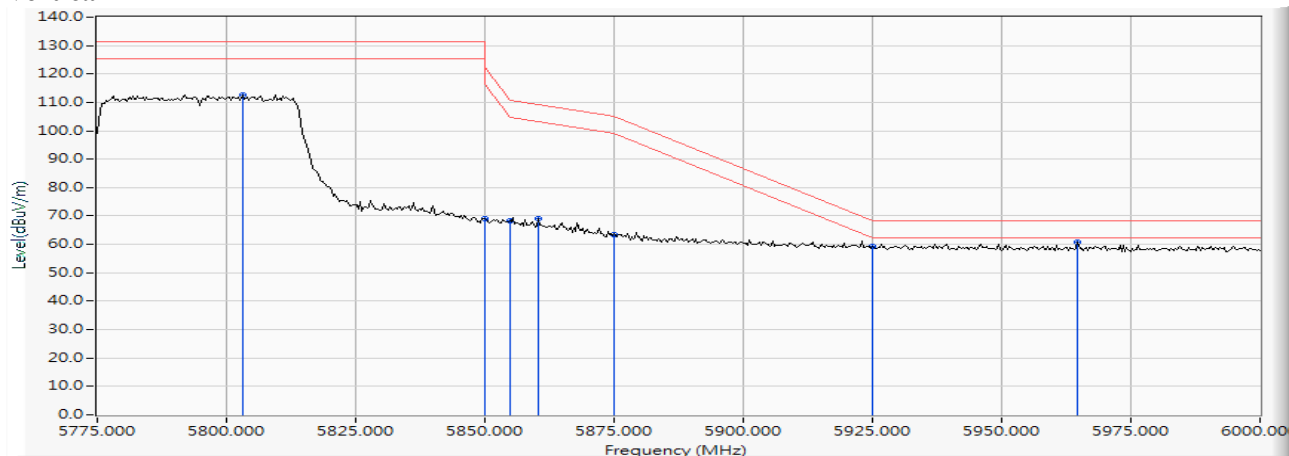

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5803.043	16.667	95.940	112.607	--	--	PEAK
2		5850.000	16.748	52.369	69.117	-53.083	122.200	PEAK
3		5855.000	16.758	51.386	68.144	-42.656	110.800	PEAK
4		5860.435	16.772	52.378	69.149	-40.129	109.278	PEAK
5		5875.000	16.807	46.598	63.406	-41.794	105.200	PEAK
6		5925.000	16.920	42.553	59.473	-8.727	68.200	PEAK
7		5964.783	16.985	43.726	60.711	-7.489	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 25: MIMO: Transmit (802.11ax-80BW_72.1Mbps)-Channel 42 (5210MHz)

Horizontal

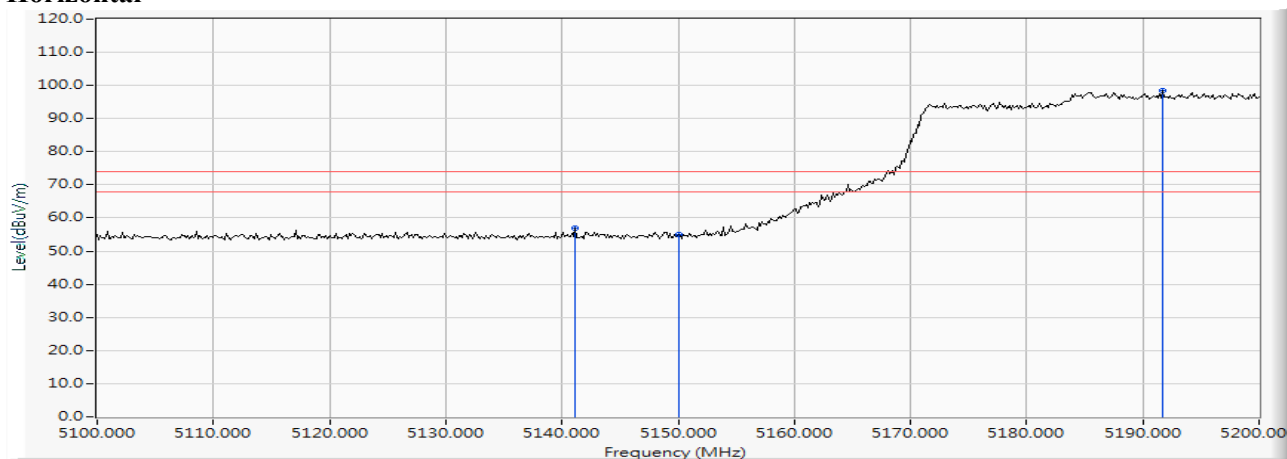


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5141.159	15.256	41.807	57.064	-16.936	74.000	PEAK
2		5150.000	15.307	39.678	54.985	-19.015	74.000	PEAK
3	*	5191.739	15.441	82.951	98.392	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 25: MIMO: Transmit (802.11ax-80BW_72.1Mbps)-Channel 42 (5210MHz)

Horizontal

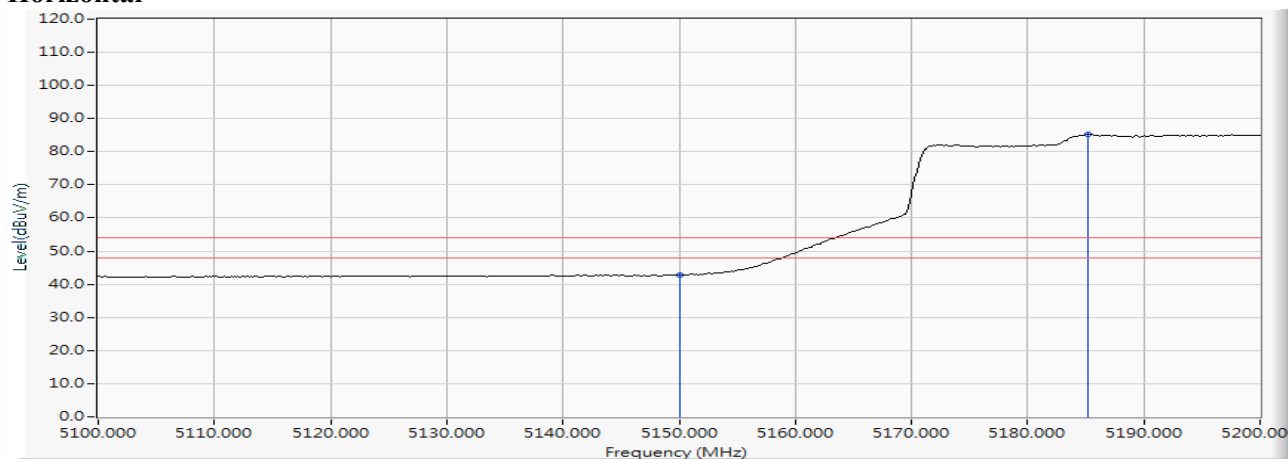


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	27.474	42.781	-11.219	54.000	AVERAGE
2	*	5185.217	15.415	69.739	85.154	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 25: MIMO: Transmit (802.11ax-80BW_72.1Mbps)-Channel 42 (5210MHz)

Vertical

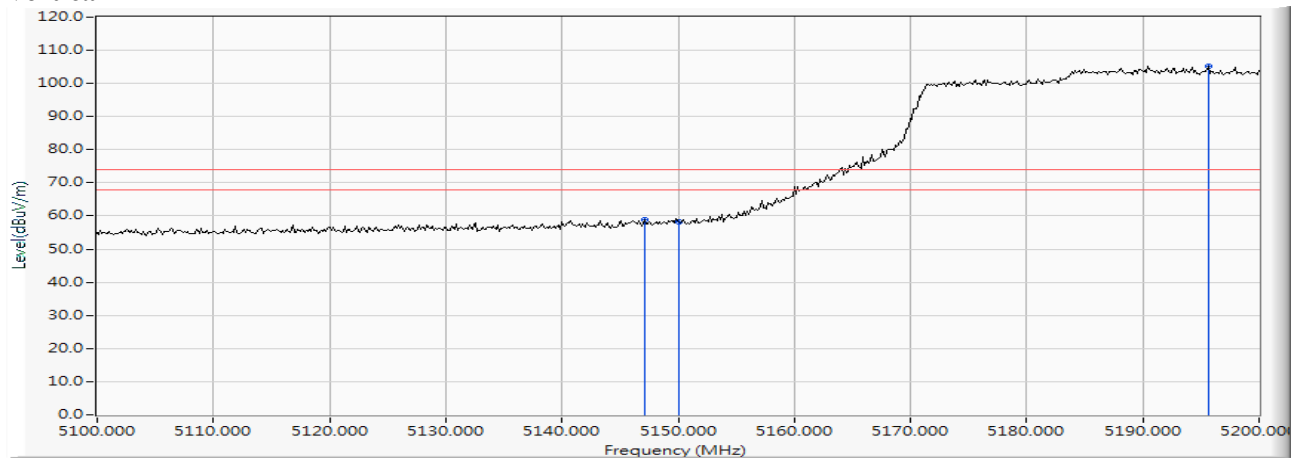


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5147.101	15.291	43.532	58.823	-15.177	74.000	PEAK
2		5150.000	15.307	42.906	58.213	-15.787	74.000	PEAK
3	*	5195.652	15.456	89.758	105.214	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 25: MIMO: Transmit (802.11ax-80BW_72.1Mbps)-Channel 42 (5210MHz)

Vertical

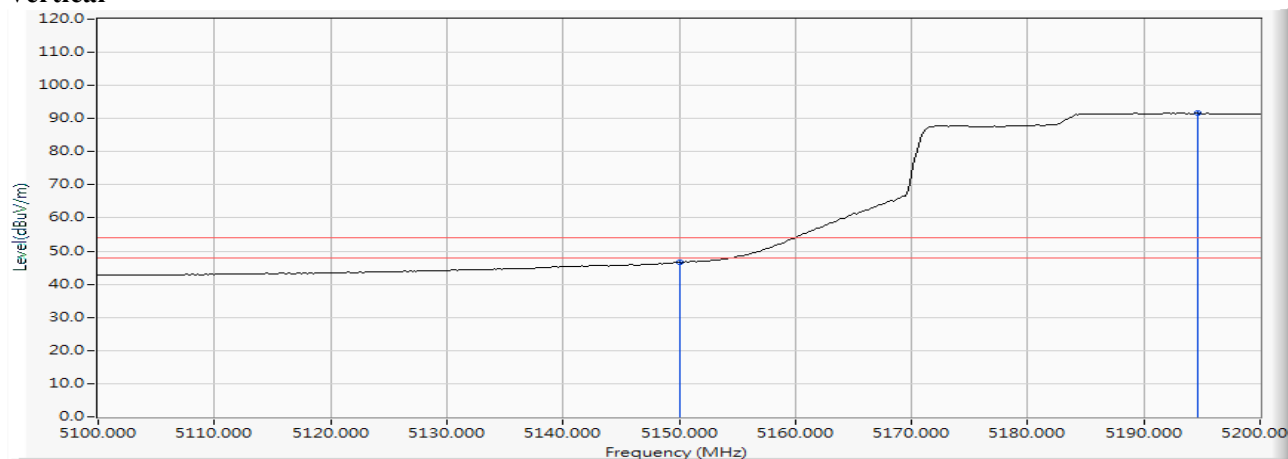


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	31.489	46.796	-7.204	54.000	AVERAGE
2	*	5194.638	15.452	76.199	91.651	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 25: MIMO: Transmit (802.11ax-80BW_72.1Mbps)-Channel 58 (5290MHz)

Horizontal

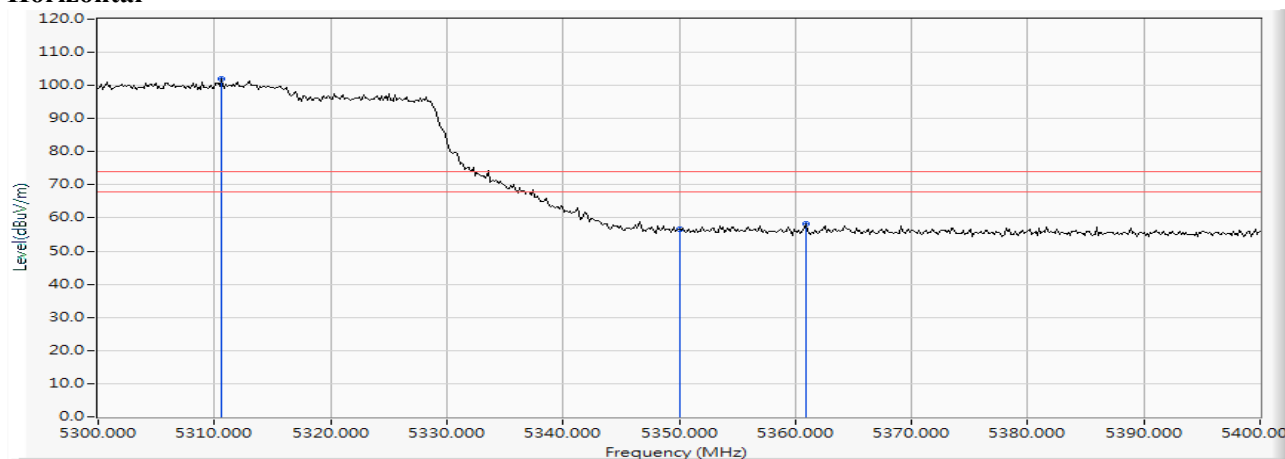


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5310.580	15.822	86.108	101.930	--	--	PEAK
2		5350.000	15.912	40.573	56.485	-17.515	74.000	PEAK
3		5360.870	15.946	42.274	58.220	-15.780	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 25: MIMO: Transmit (802.11ax-80BW_72.1Mbps)-Channel 58 (5290MHz)

Horizontal

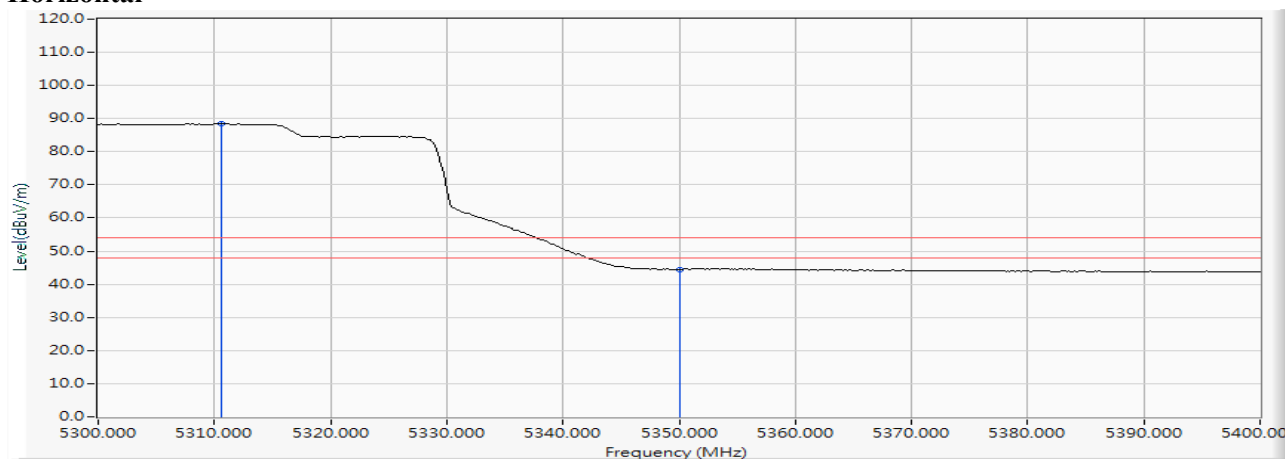


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5310.580	15.822	72.701	88.523	--	--	AVERAGE
2		5350.000	15.912	28.597	44.509	-9.491	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 25: MIMO: Transmit (802.11ax-80BW_72.1Mbps)-Channel 58 (5290MHz)

Vertical

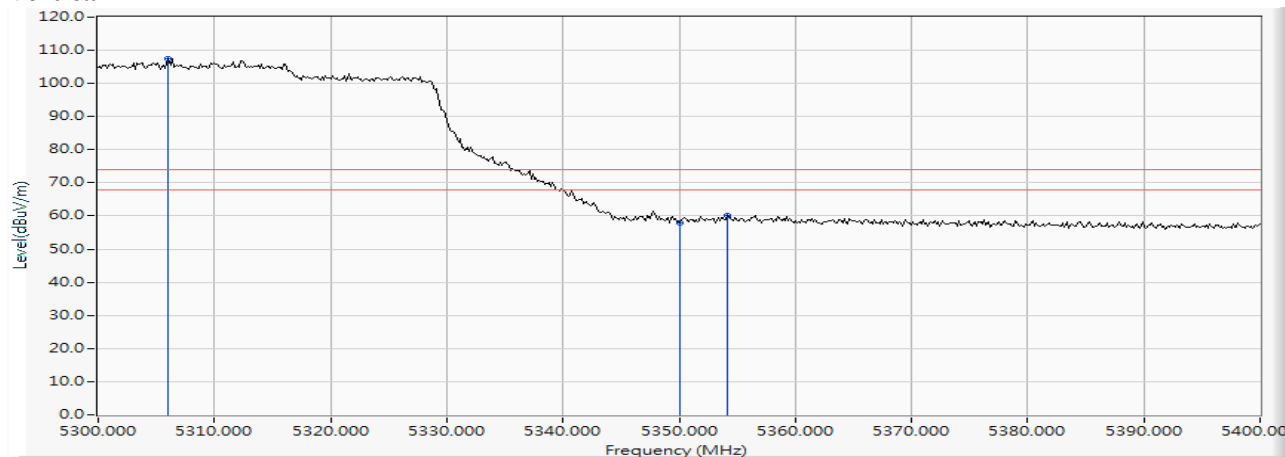


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5305.942	15.811	91.657	107.468	--	--	PEAK
2		5350.000	15.912	42.006	57.918	-16.082	74.000	PEAK
3		5354.203	15.925	44.099	60.024	-13.976	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 25: MIMO: Transmit (802.11ax-80BW_72.1Mbps)-Channel 58 (5290MHz)

Vertical

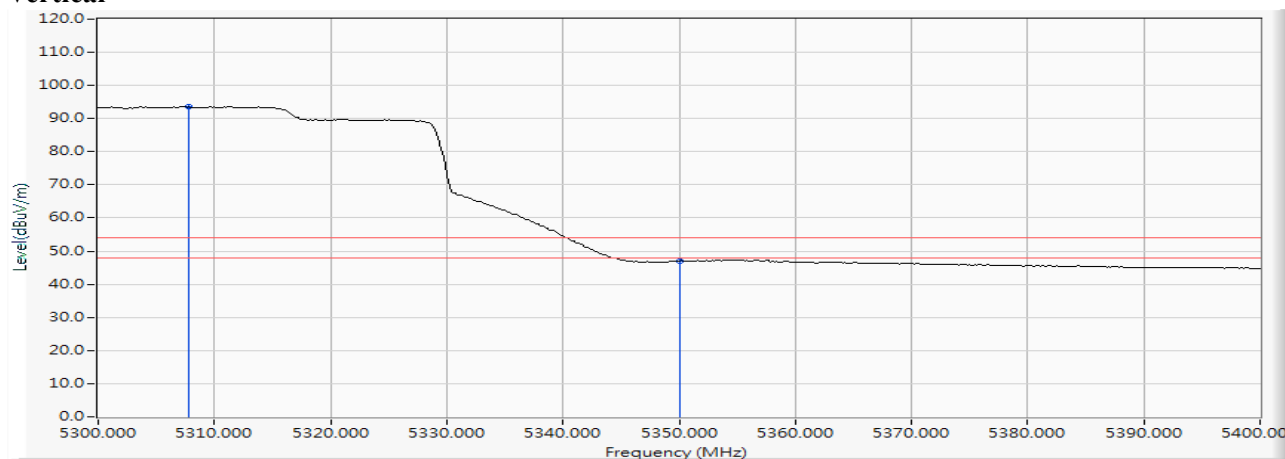


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1	*	5307.826	15.816	77.807	93.622	--	--	AVERAGE
2		5350.000	15.912	31.162	47.074	-6.926	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 25: MIMO: Transmit (802.11ax-80BW_72.1Mbps)-Channel 106 (5530MHz)

Horizontal

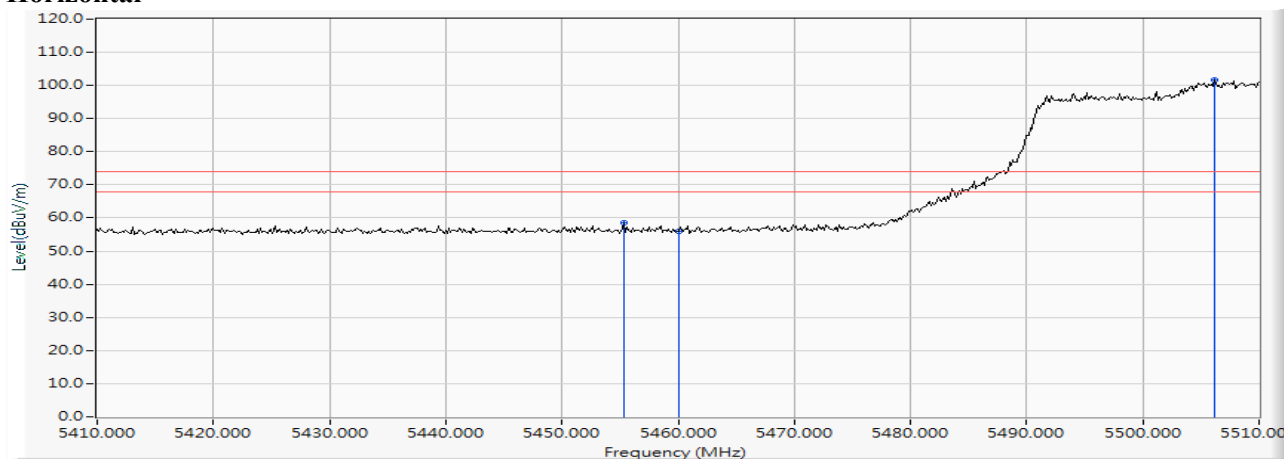


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5455.362	16.175	42.533	58.708	-15.292	74.000	PEAK
2		5460.000	16.185	39.911	56.096	-17.904	74.000	PEAK
3	*	5506.232	16.273	85.360	101.633	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 25: MIMO: Transmit (802.11ax-80BW_72.1Mbps)-Channel 106 (5530MHz)

Horizontal

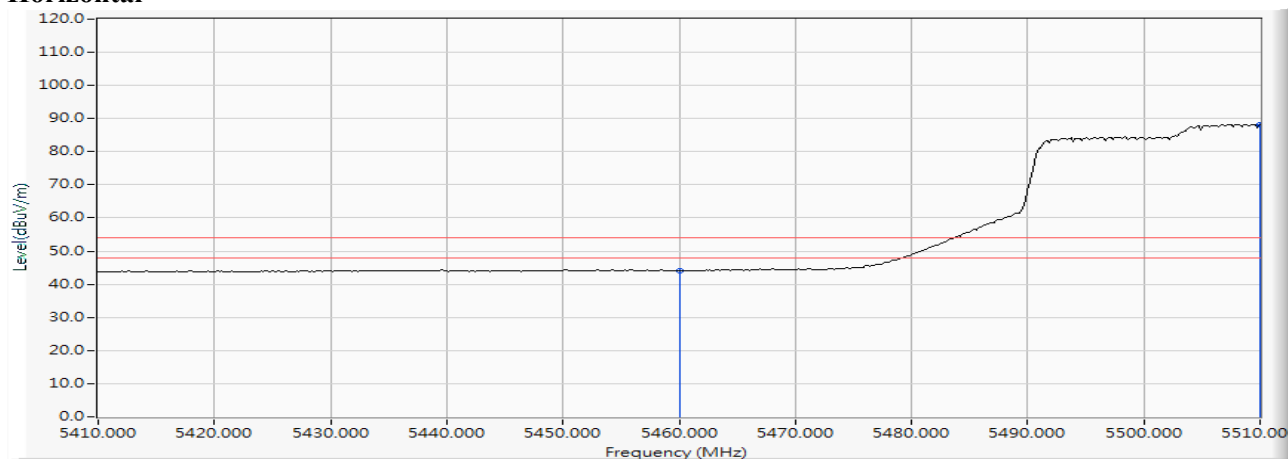


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5460.000	16.185	27.959	44.144	-9.856	54.000	AVERAGE
2	*	5510.000	16.275	71.973	88.248	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 25: MIMO: Transmit (802.11ax-80BW_72.1Mbps)-Channel 106 (5530MHz)

Vertical

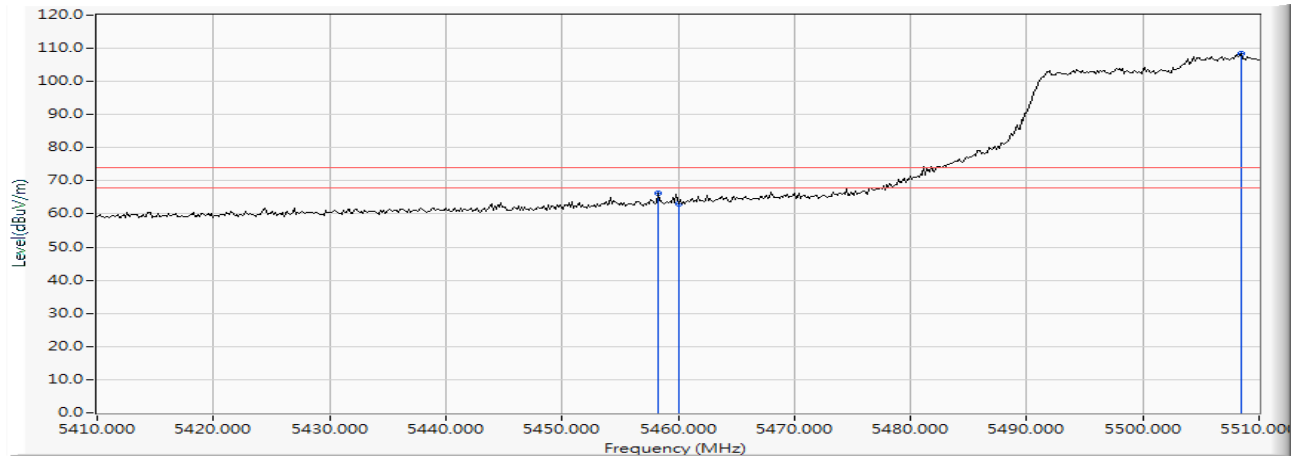


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5458.261	16.182	49.935	66.117	-7.883	74.000	PEAK
2		5460.000	16.185	46.827	63.012	-10.988	74.000	PEAK
3	*	5508.406	16.275	92.013	108.287	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 25: MIMO: Transmit (802.11ax-80BW_72.1Mbps)-Channel 106 (5530MHz)

Vertical

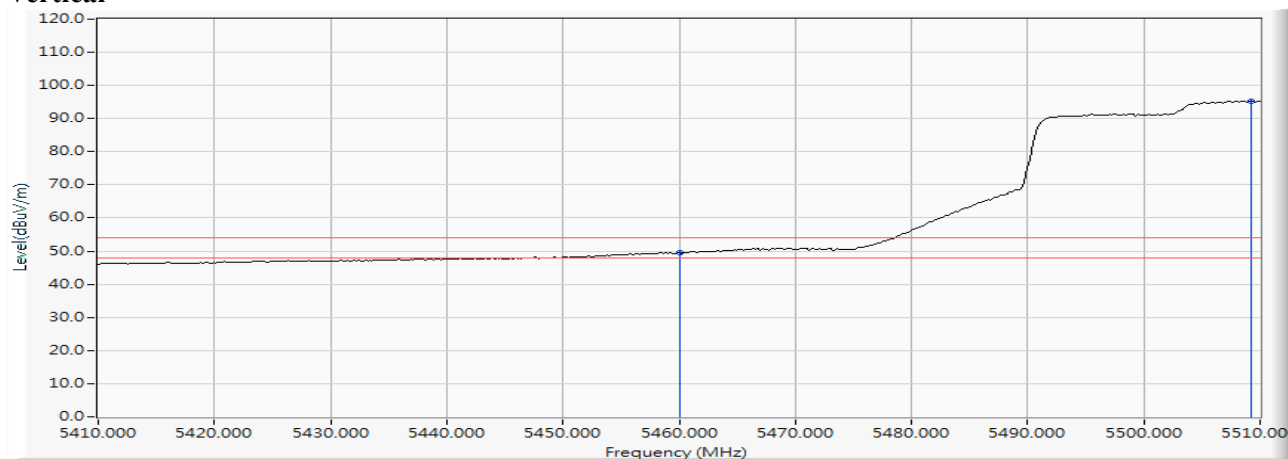


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5460.000	16.185	33.352	49.537	-4.463	54.000	AVERAGE
2	*	5509.275	16.274	79.063	95.338	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 25: MIMO: Transmit (802.11ax-80BW_72.1Mbps)-Channel 106 (5530MHz)


Horizontal

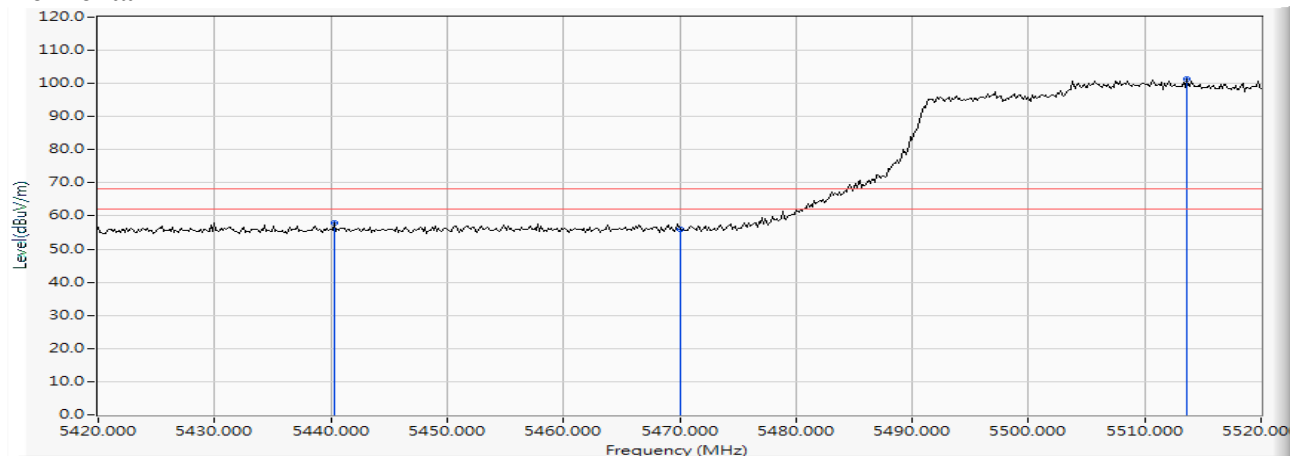

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5440.290	16.126	41.784	57.910	-10.310	68.220	PEAK
2		5470.000	16.200	39.912	56.112	-12.108	68.220	PEAK
3	*	5513.623	16.281	84.974	101.255	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 25: MIMO: Transmit (802.11ax-80BW_72.1Mbps)-Channel 106 (5530MHz)


Vertical

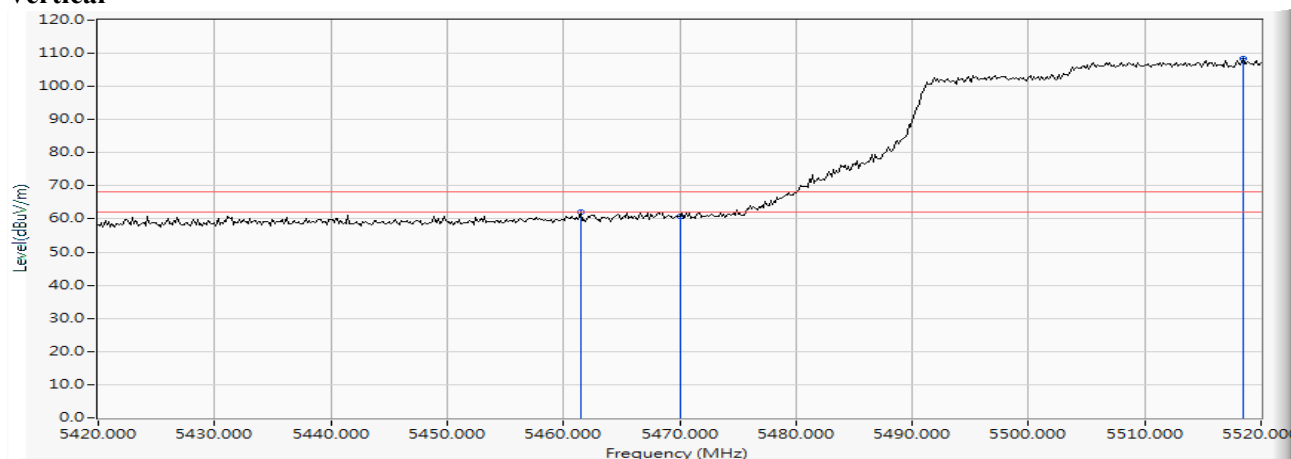

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5461.449	16.186	45.795	61.982	-6.238	68.220	PEAK
2		5470.000	16.200	44.499	60.699	-7.521	68.220	PEAK
3	*	5518.406	16.290	92.062	108.351	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 25: MIMO: Transmit (802.11ax-80BW_72.1Mbps)-Channel 155 (5775MHz)


Horizontal

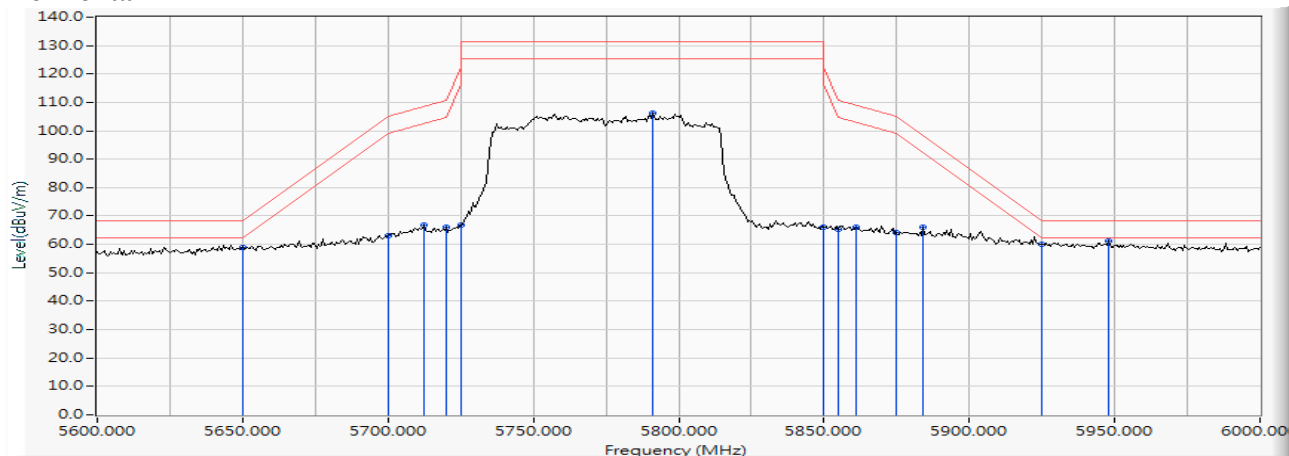

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5650.000	16.447	42.625	59.072	-9.148	68.220	PEAK
2		5700.000	16.502	46.585	63.087	-42.113	105.200	PEAK
3		5712.464	16.520	50.120	66.640	-42.050	108.690	PEAK
4		5720.000	16.535	49.654	66.189	-44.611	110.800	PEAK
5		5725.000	16.544	50.081	66.625	-55.575	122.200	PEAK
6	*	5791.304	16.637	89.693	106.330	--	--	PEAK
7		5850.000	16.748	49.370	66.118	-56.082	122.200	PEAK
8		5855.000	16.758	48.512	65.270	-45.530	110.800	PEAK
9		5860.870	16.773	49.444	66.216	-42.940	109.156	PEAK
10		5875.000	16.807	47.201	64.009	-41.191	105.200	PEAK
11		5884.058	16.833	49.048	65.881	-32.616	98.497	PEAK
12		5925.000	16.920	43.098	60.018	-8.182	68.200	PEAK
13		5947.826	16.950	44.185	61.135	-7.065	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 25: MIMO: Transmit (802.11ax-80BW_72.1Mbps)-Channel 155 (5775MHz)


Vertical

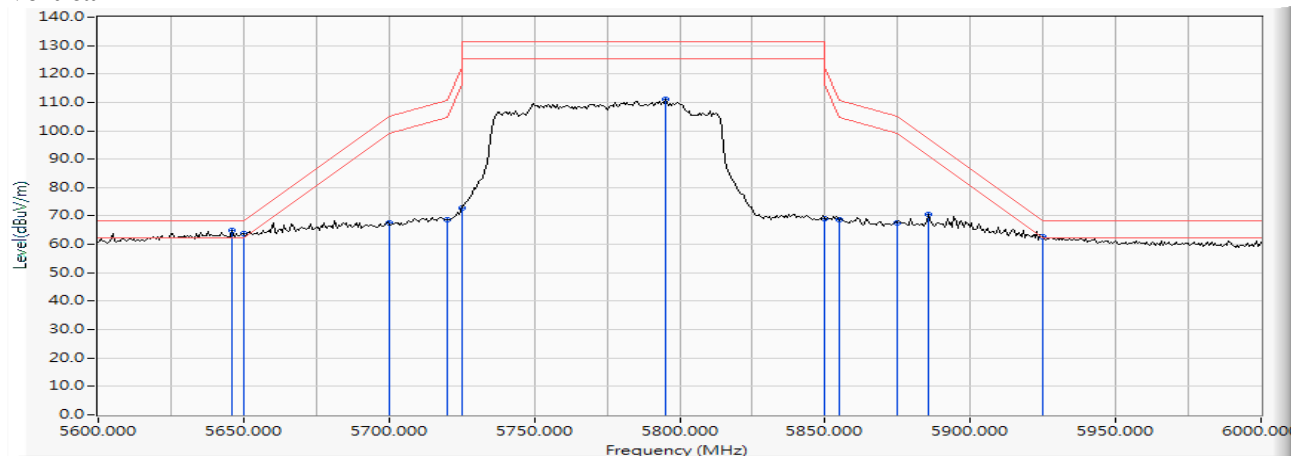

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5645.797	16.436	48.650	65.085	-3.135	68.220	PEAK
2		5650.000	16.447	47.174	63.621	-4.599	68.220	PEAK
3		5700.000	16.502	50.923	67.425	-37.775	105.200	PEAK
4		5720.000	16.535	52.333	68.868	-41.932	110.800	PEAK
5		5725.000	16.544	56.331	72.875	-49.325	122.200	PEAK
6	*	5795.362	16.648	94.306	110.954	--	--	PEAK
7		5850.000	16.748	52.479	69.227	-52.973	122.200	PEAK
8		5855.000	16.758	51.841	68.599	-42.201	110.800	PEAK
9		5875.000	16.807	50.866	67.674	-37.526	105.200	PEAK
10		5885.797	16.839	53.645	70.483	-26.727	97.210	PEAK
11		5925.000	16.920	45.577	62.497	-5.703	68.200	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 26: MIMO: Transmit (802.11ax-160BW_144.1Mbps)-Channel 50 (5250MHz)

Horizontal

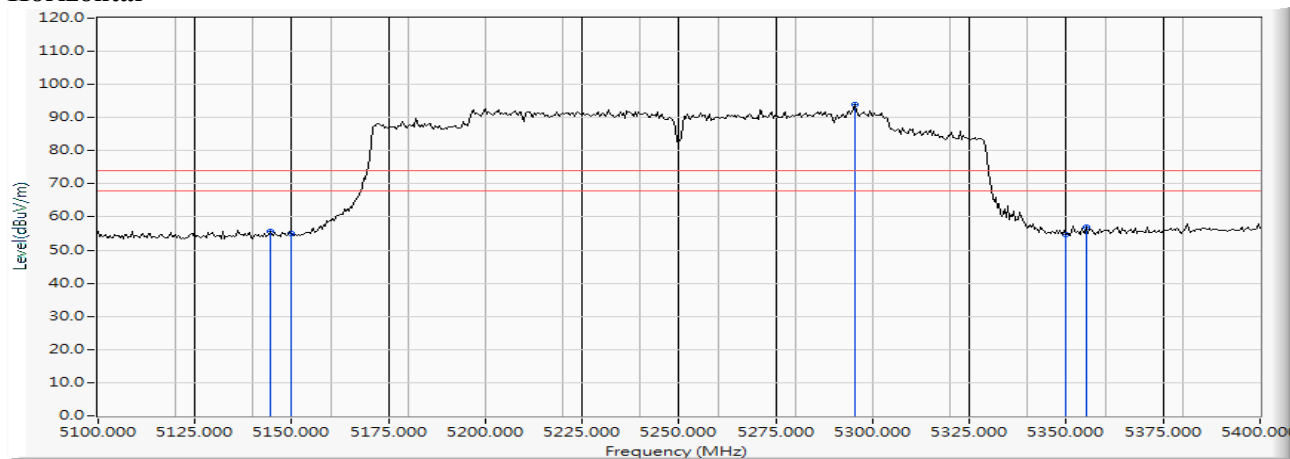


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5144.348	15.275	40.503	55.778	-18.222	74.000	PEAK
2		5150.000	15.307	39.710	55.017	-18.983	74.000	PEAK
3	*	5295.217	15.784	78.294	94.078	--	--	PEAK
4		5350.000	15.912	38.922	54.834	-19.166	74.000	PEAK
5		5355.217	15.928	41.140	57.068	-16.932	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 26: MIMO: Transmit (802.11ax-160BW_144.1Mbps)-Channel 50 (5250MHz)

Horizontal

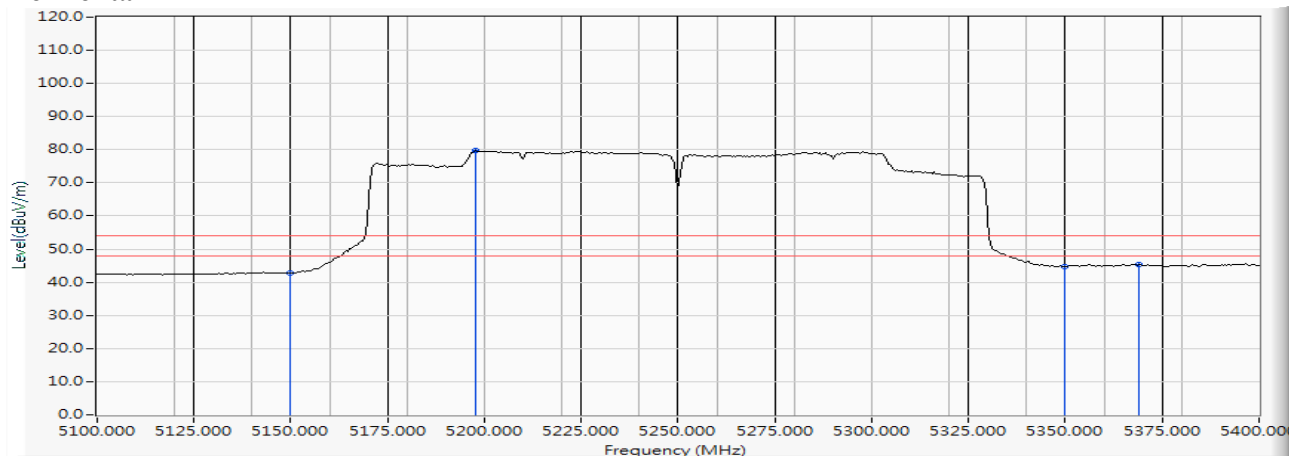


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5150.000	15.307	27.466	42.773	-11.227	54.000	AVERAGE
2	*	5197.826	15.465	64.193	79.658	--	--	AVERAGE
3		5350.000	15.912	28.791	44.703	-9.297	54.000	AVERAGE
4		5369.130	15.971	29.392	45.363	-8.637	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 26: MIMO: Transmit (802.11ax-160BW_144.1Mbps)-Channel 50 (5250MHz)

Vertical

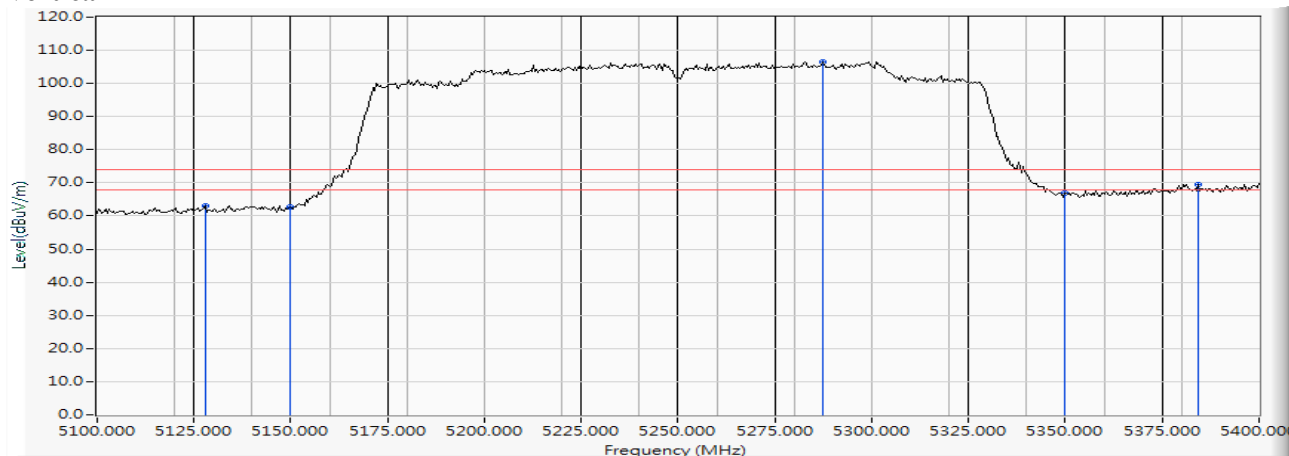


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		5127.826	15.195	47.912	63.106	-10.894	74.000	PEAK
2		5150.000	15.307	47.317	62.624	-11.376	74.000	PEAK
3	*	5287.391	15.764	90.851	106.616	--	--	PEAK
4		5350.000	15.912	51.121	67.033	-6.967	74.000	PEAK
5		5384.348	16.012	53.481	69.492	-4.508	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 26: MIMO: Transmit (802.11ax-160BW_144.1Mbps)-Channel 50 (5250MHz)

Vertical

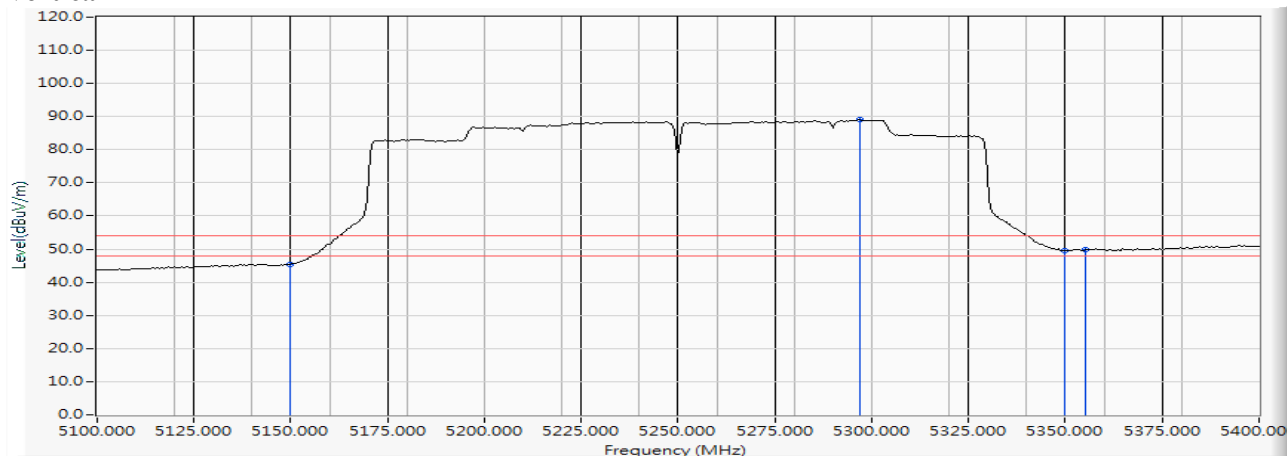


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5150.000	15.307	30.035	45.342	-8.658	54.000	AVERAGE
2	*	5296.957	15.789	73.254	89.043	--	--	AVERAGE
3		5350.000	15.912	33.479	49.391	-4.609	54.000	AVERAGE
4		5355.217	15.928	34.076	50.004	-3.996	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 26: MIMO: Transmit (802.11ax-160BW_144.1Mbps)-Channel 114 (5570MHz)

Horizontal

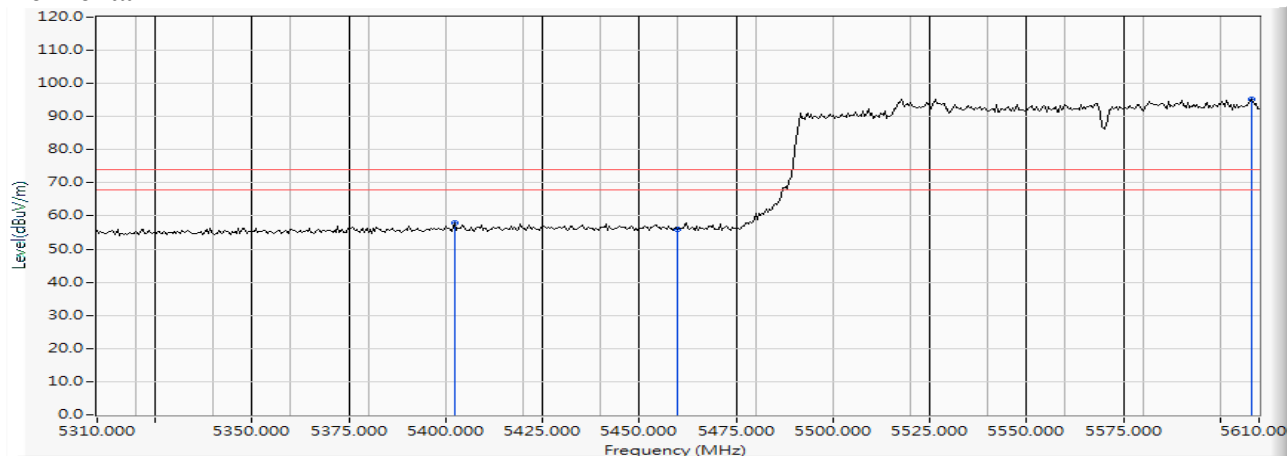


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5402.174	16.030	41.727	57.758	-16.242	74.000	PEAK
2		5460.000	16.185	39.910	56.095	-17.905	74.000	PEAK
3	*	5608.261	16.394	78.863	95.256	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 26: MIMO: Transmit (802.11ax-160BW_144.1Mbps)-Channel 114 (5570MHz)

Horizontal

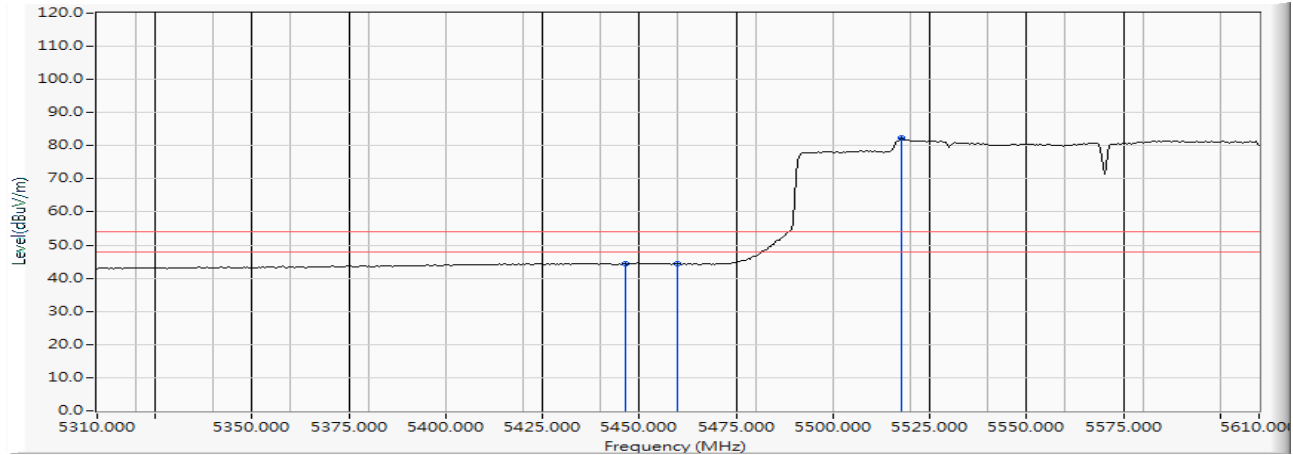


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5446.522	16.146	28.275	44.421	-9.579	54.000	AVERAGE
2		5460.000	16.185	28.137	44.322	-9.678	54.000	AVERAGE
3	*	5517.826	16.288	65.918	82.206	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 26: MIMO: Transmit (802.11ax-160BW_144.1Mbps)-Channel 114 (5570MHz)

Vertical

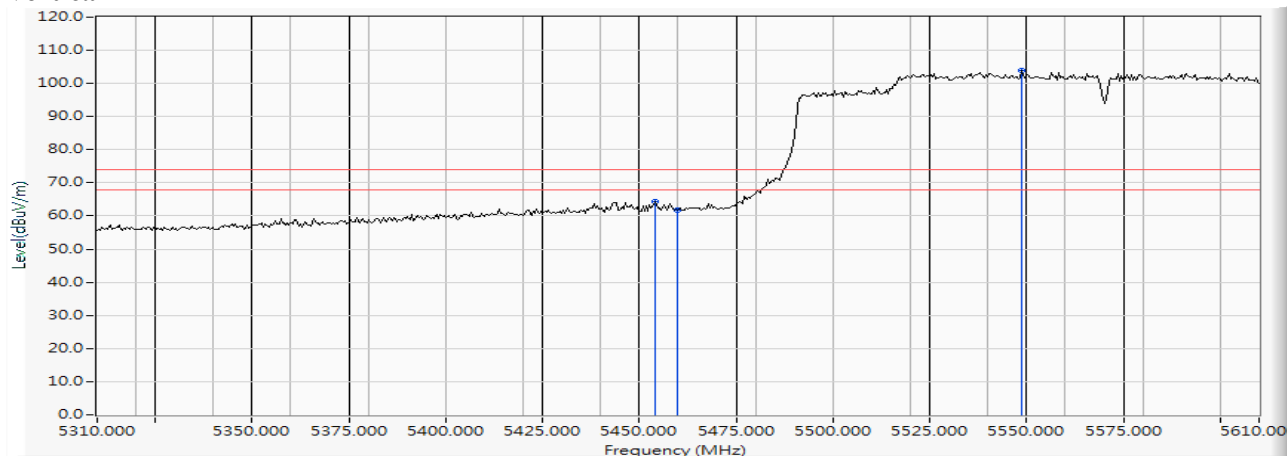


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5453.913	16.170	48.304	64.474	-9.526	74.000	PEAK
2		5460.000	16.185	45.617	61.802	-12.198	74.000	PEAK
3	*	5548.696	16.324	87.647	103.971	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 26: MIMO: Transmit (802.11ax-160BW_144.1Mbps)-Channel 114 (5570MHz)

Vertical

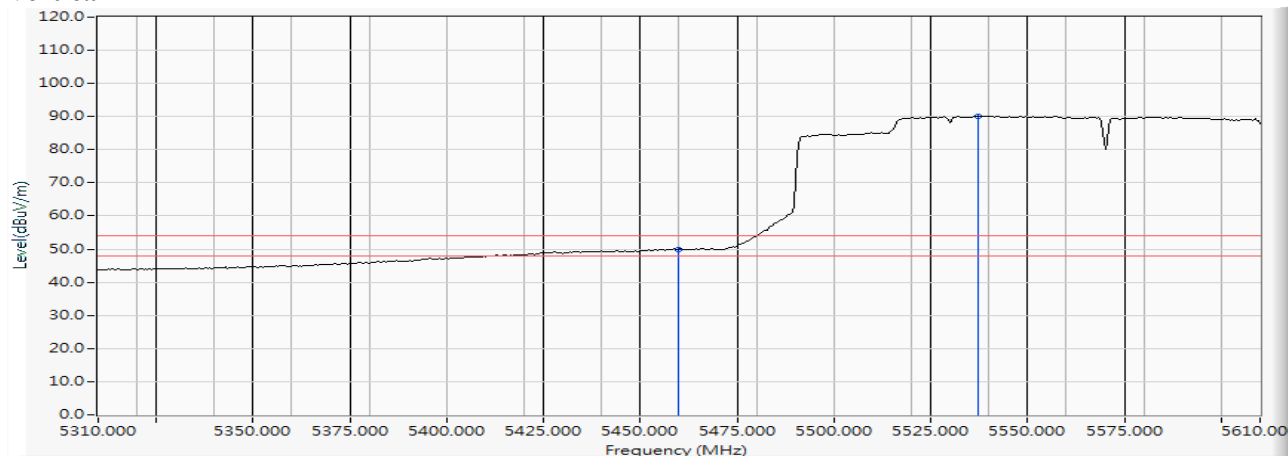


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5460.000	16.185	33.612	49.797	-4.203	54.000	AVERAGE
2	*	5537.391	16.316	73.920	90.236	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 26: MIMO: Transmit (802.11ax-160BW_144.1Mbps)-Channel 114 (5570MHz)


Horizontal

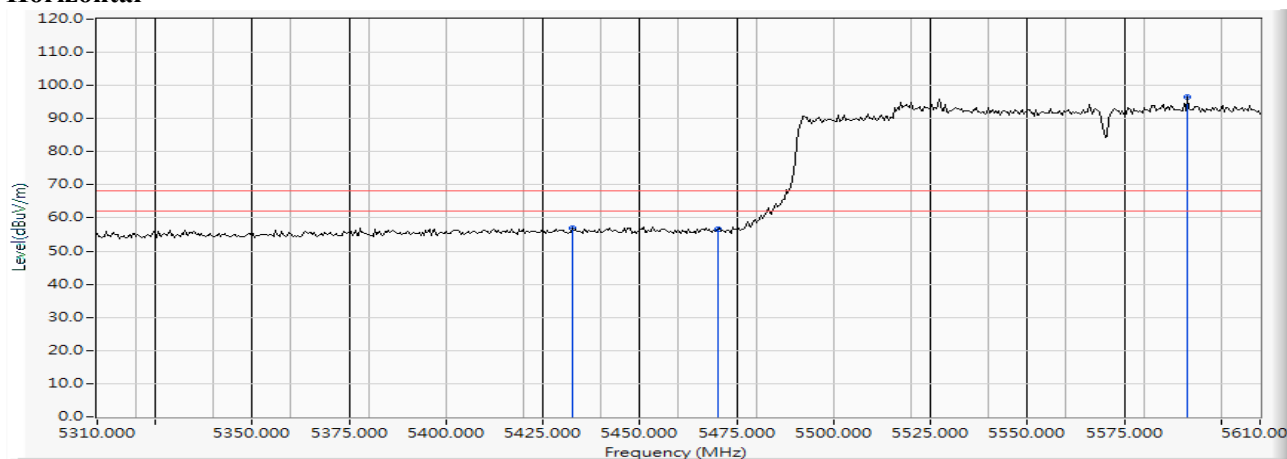

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5432.609	16.109	40.709	56.818	-11.402	68.220	PEAK
2		5470.000	16.200	40.439	56.639	-11.581	68.220	PEAK
3	*	5591.304	16.376	80.295	96.671	--	--	PEAK

Product : Intel® Wi-Fi 6 AX200
 Test Item : Band Edge Data
 Test Date : 2019/04/08
 Test Mode : Mode 26: MIMO: Transmit (802.11ax-160BW_144.1Mbps)-Channel 114 (5570MHz)


Vertical

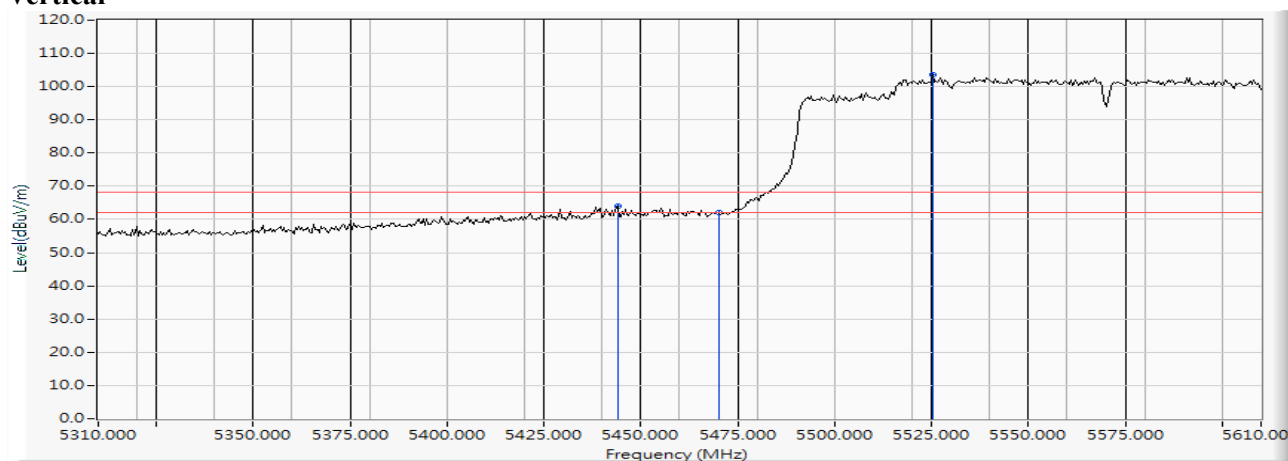

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBμV)	Measure Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector Type
1		5443.913	16.137	47.782	63.919	-4.301	68.220	PEAK
2		5470.000	16.200	45.996	62.196	-6.024	68.220	PEAK
3	*	5525.217	16.301	87.191	103.492	--	--	PEAK

5. Duty Cycle

5.1. Test Setup

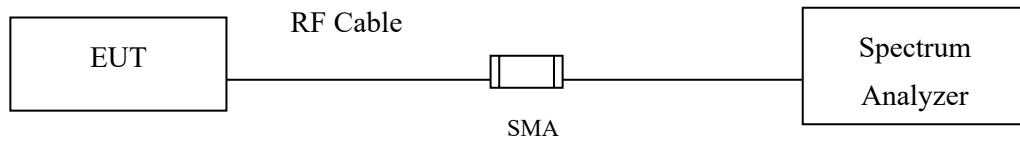

5.2. Test Procedure

The EUT was setup according to ANSI C63.10 2013; tested according to U-NII test procedure of KDB789033 for compliance to FCC 47CFR 15.407 requirements.

5.3. Uncertainty

$\pm 2.31\text{msec}$

5.4. Test Result of Duty Cycle

Product : Intel® Wi-Fi 6 AX200
Test Item : Duty Cycle
Test Mode : Mode 27: Transmit-SISO A

Duty Cycle Formula:


Duty Cycle = $T_{on} / (T_{on} + T_{off})$

Duty Factor = $10 \log (1/\text{Duty Cycle})$

Results:


5GHz band	Ton (ms)	Ton + Toff (ms)	Duty Cycle (%)	Duty Factor (dB)
802.11a	2.0870	2.3478	88.89	0.51
802.11n20	24.8116	25.0725	98.96	0.05
802.11n40	17.8551	18.1159	98.56	0.06
802.11ac80	11.0145	11.3043	97.44	0.11
802.11ac160	5.5072	5.7971	95.00	0.22
802.11ax20	24.7826	25.0000	99.13	0.04
802.11ax40	18.6957	18.9855	98.47	0.07
802.11ax80	8.9130	9.2029	96.85	0.14
802.11ax160	4.4928	4.7826	93.94	0.27

802.11a (SISO A)

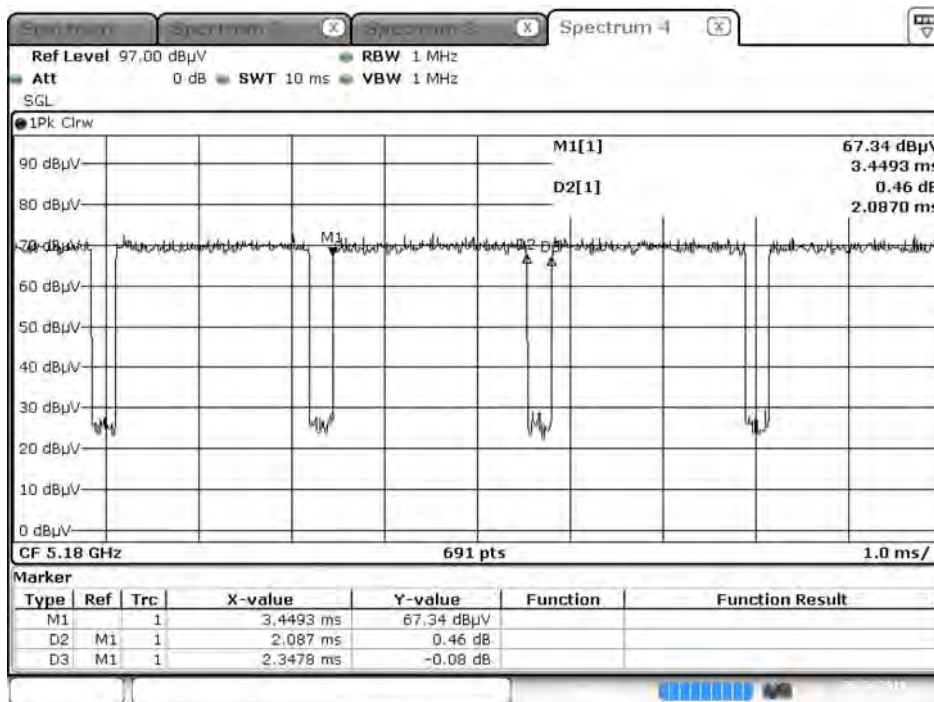


Date: 3 APR 2019 20:25:36

802.11n20 (SISO A)

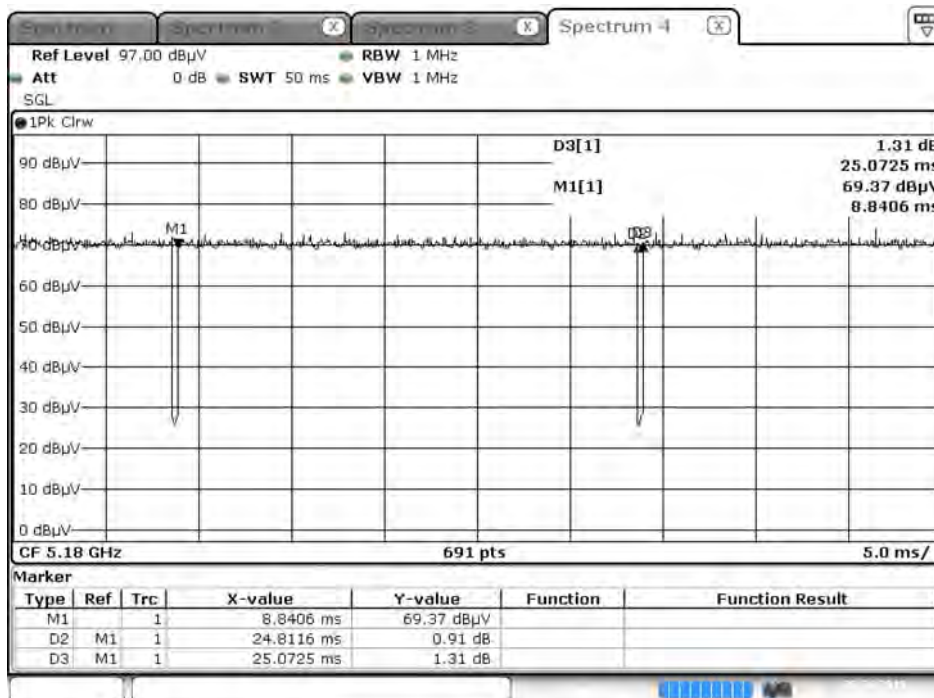


Date: 3 APR 2019 20:26:28

802.11n40 (SISO A)

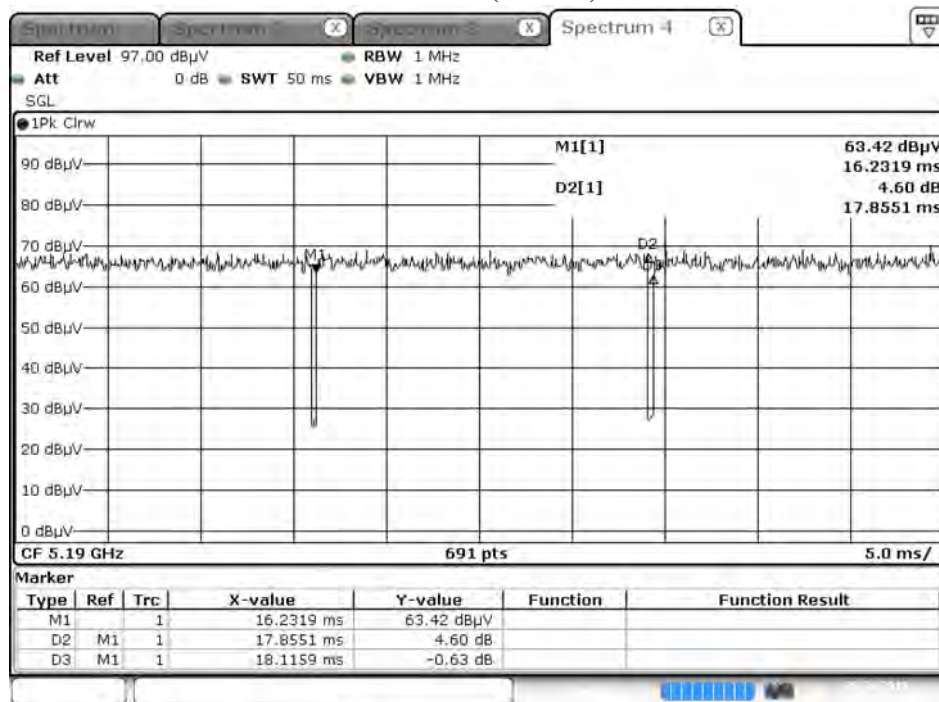


Date: 3 APR 2019 20:27:17

802.11ac80 (SISO A)

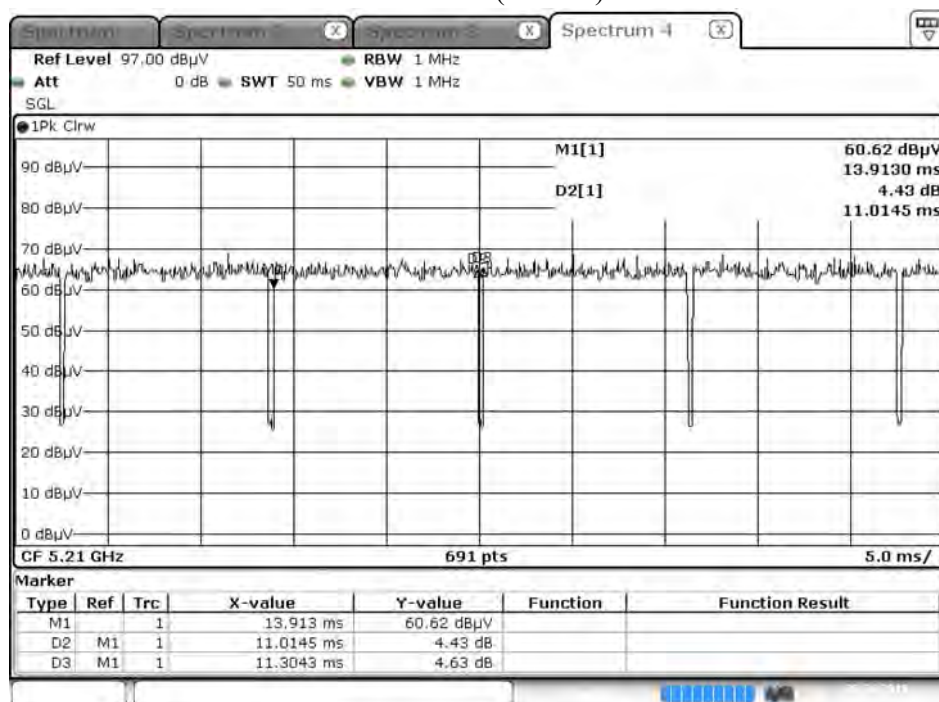


Date: 3 APR 2019 20:28:34

802.11ac160 (SISO A)


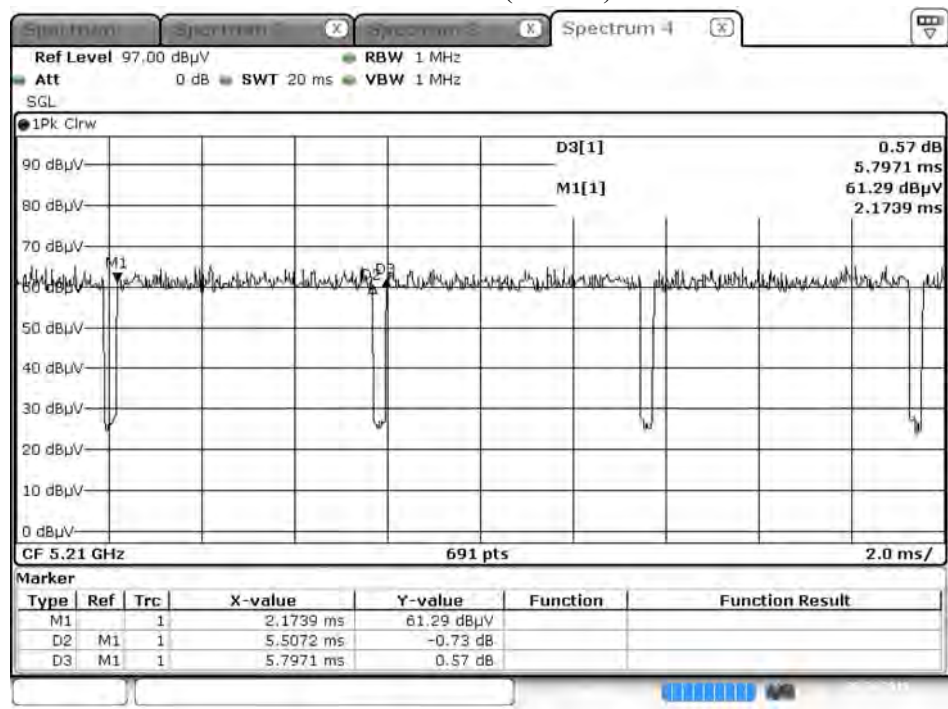


Date: 3 APR 2019 20:29:32


802.11ax20 (SISO A)

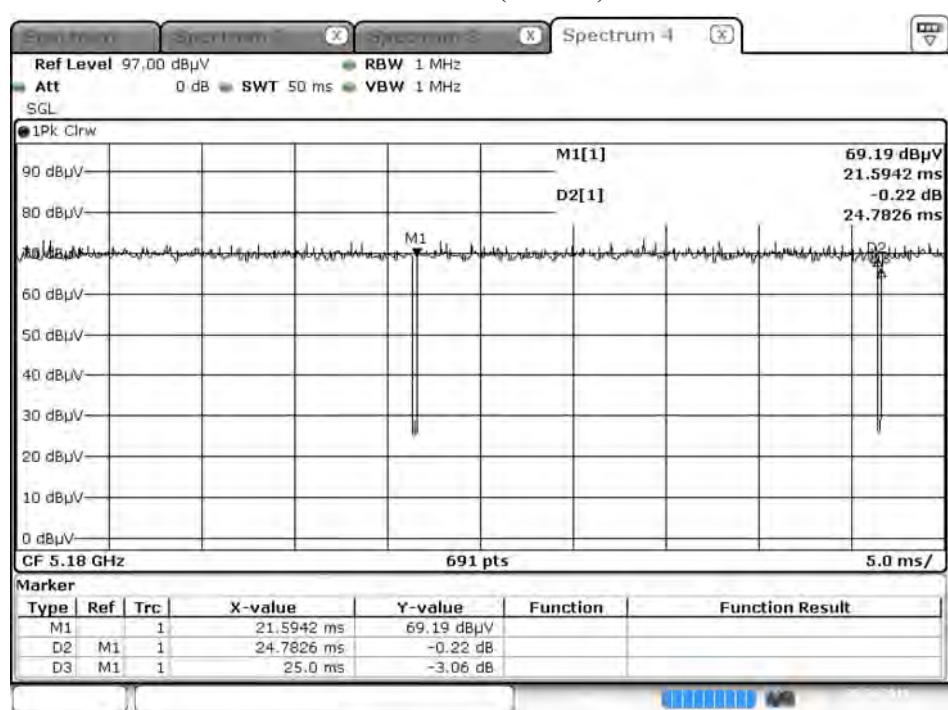

Date: 3 APR 2019 20:30:22

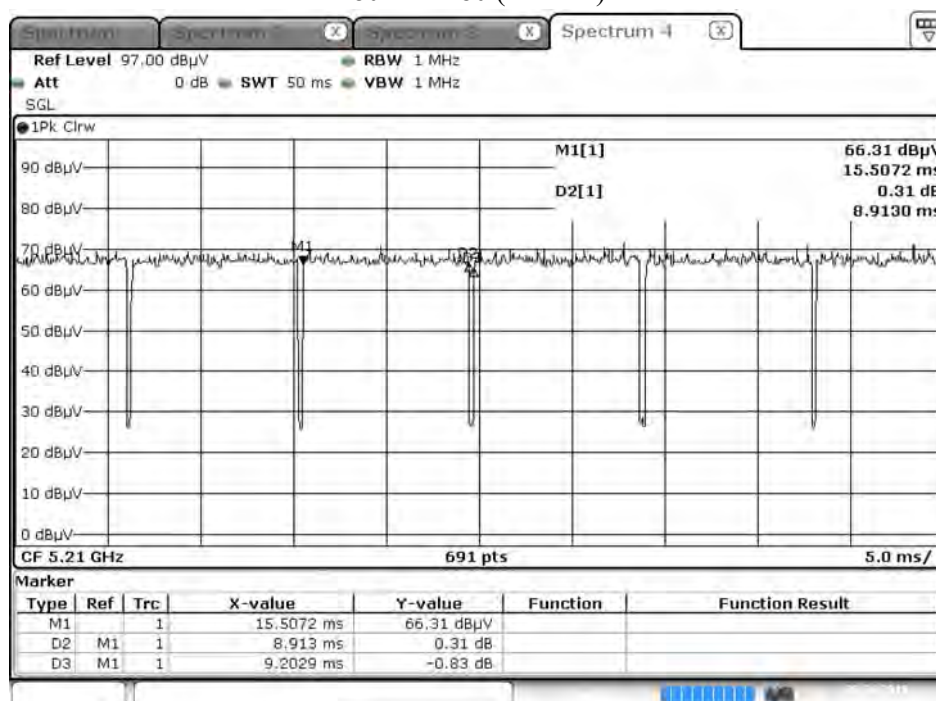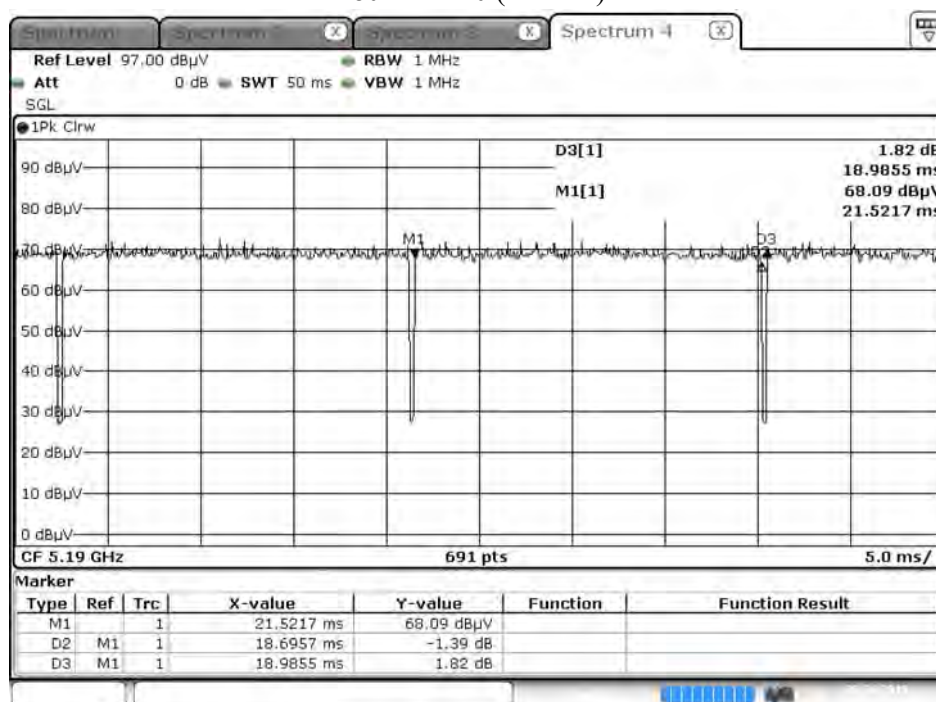

802.11ax160 (SISO A)

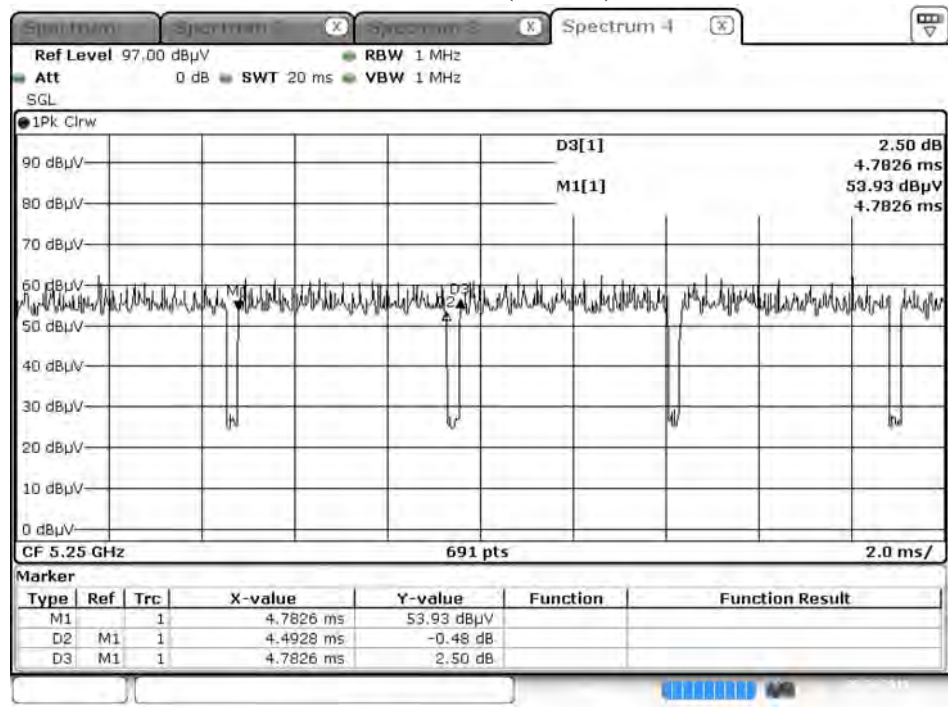

Date: 3 APR 2019 20:32:38

Product : Intel® Wi-Fi 6 AX200
Test Item : Duty Cycle
Test Mode : Mode 28: Transmit-SISO B

Duty Cycle Formula:


$\text{Duty Cycle} = \text{Ton} / (\text{Ton} + \text{Toff})$

$\text{Duty Factor} = 10 \text{ Log } (1/\text{Duty Cycle})$

Results:


5GHz band	Ton (ms)	Ton + Toff (ms)	Duty Cycle (%)	Duty Factor (dB)
802.11a	2.0725	2.3478	88.27	0.54
802.11n20	24.7826	25.0725	98.84	0.05
802.11n40	17.8696	18.1304	98.56	0.06
802.11ac80	11.0145	11.3043	97.44	0.11
802.11ac160	5.5217	5.8116	95.01	0.22
802.11ax20	24.7971	25.0145	99.13	0.04
802.11ax40	18.6957	18.9855	98.47	0.07
802.11ax80	8.9130	9.2029	96.85	0.14
802.11ax160	4.5217	4.7826	94.54	0.24

802.11a (SISO B)

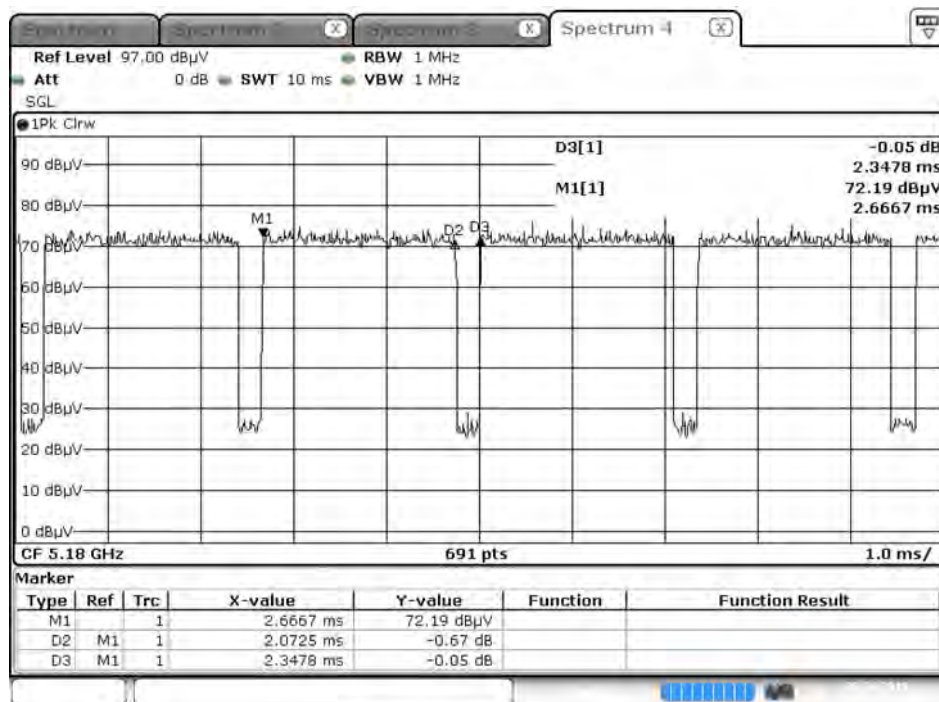


Date: 3 APR 2019 20:41:21

802.11n20 (SISO B)

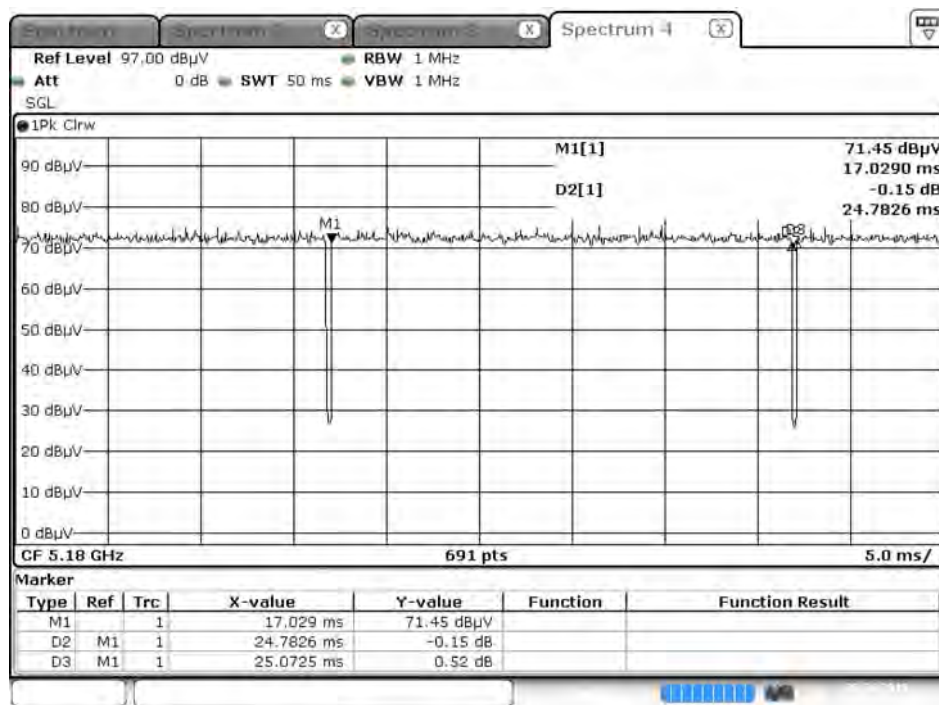


Date: 3 APR 2019 20:40:32

802.11n40 (SISO B)

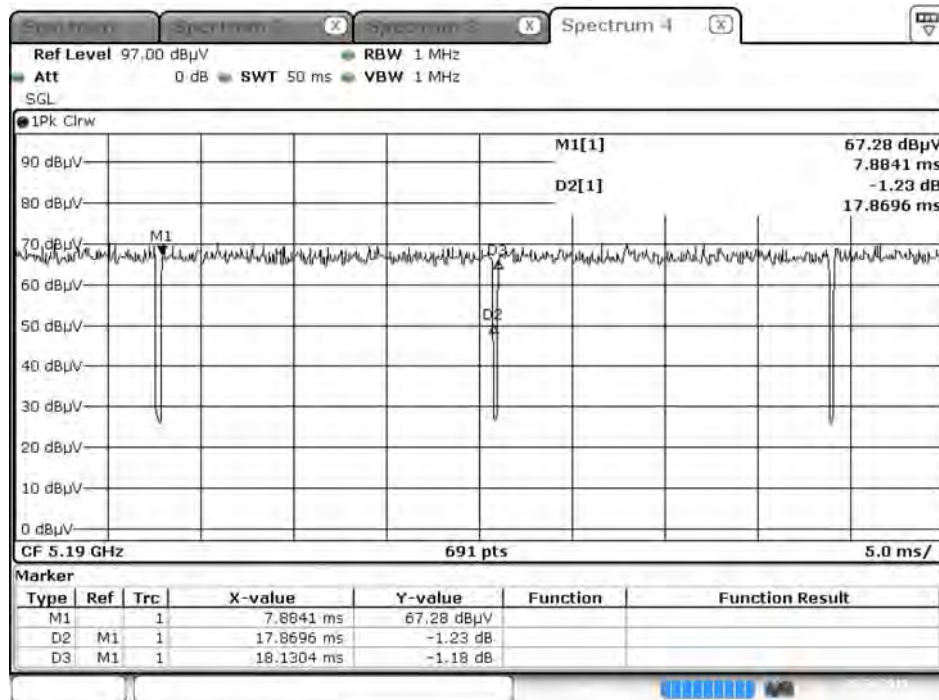


Date: 3 APR 2019 20:42:02

802.11ac80 (SISO B)

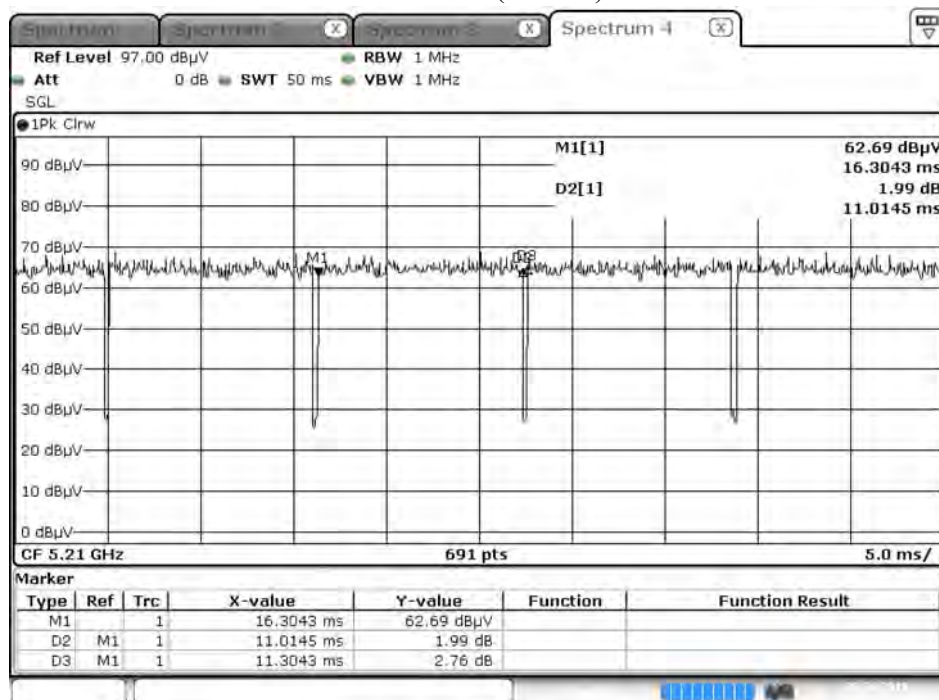


Date: 3 APR 2019 20:42:50

802.11ac160 (SISO B)

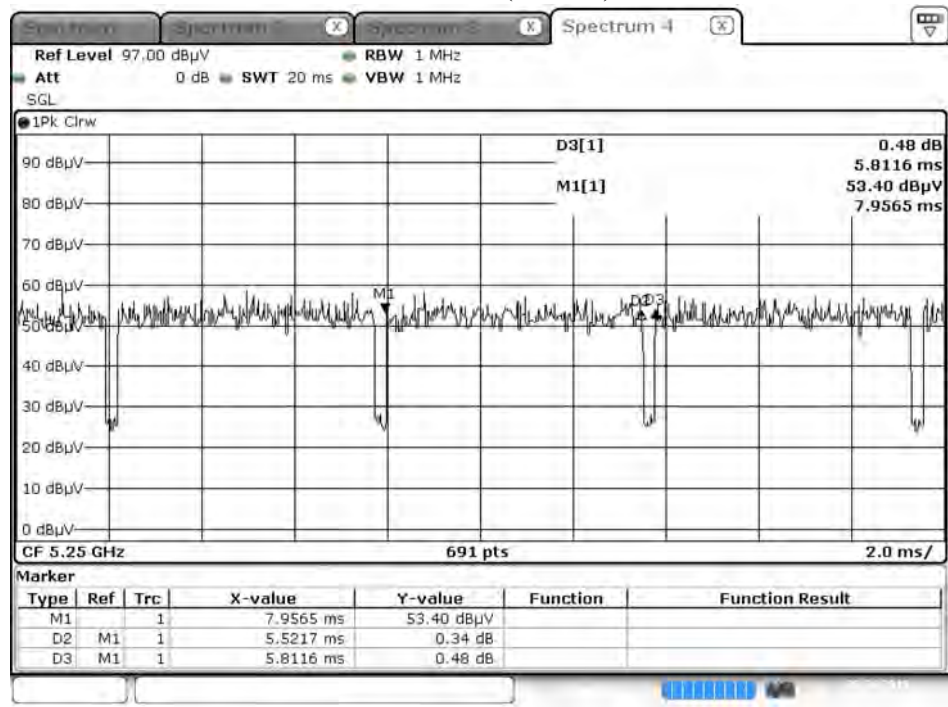


Date: 3 APR 2019 20:43:33

802.11ax20 (SISO B)

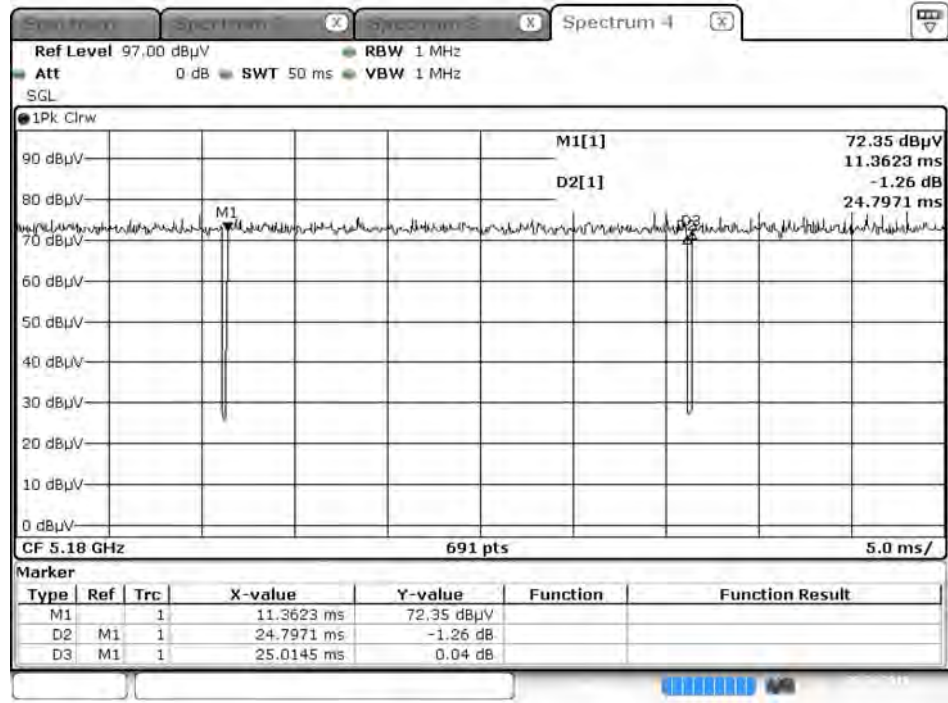


Date: 3 APR 2019 20:44:19

802.11ax40 (SISO B)

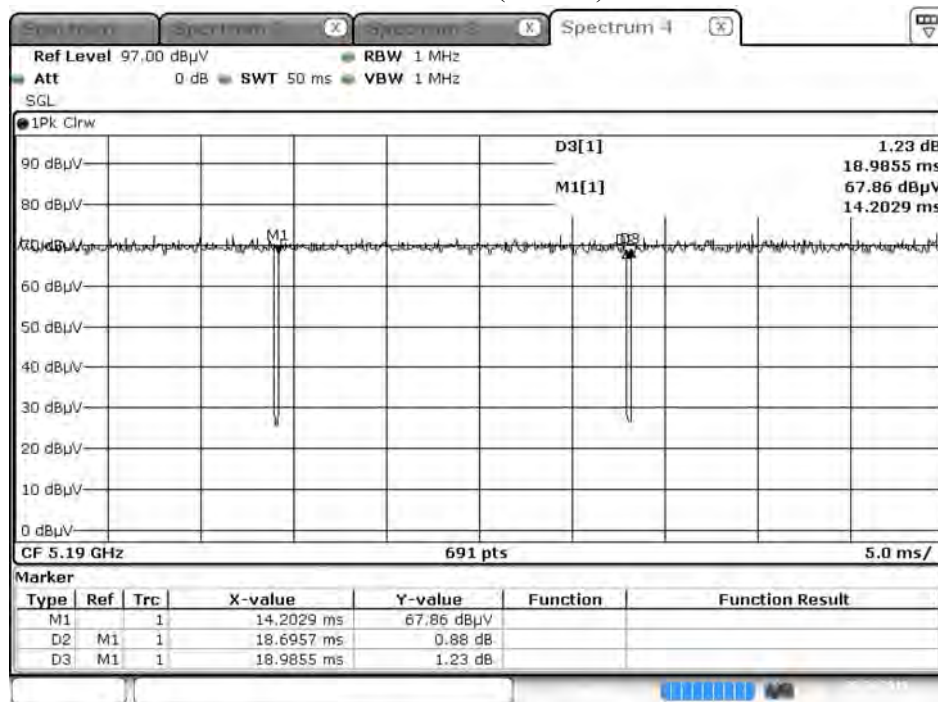


Date: 3 APR 2019 20:45:13

802.11ax80 (SISO B)

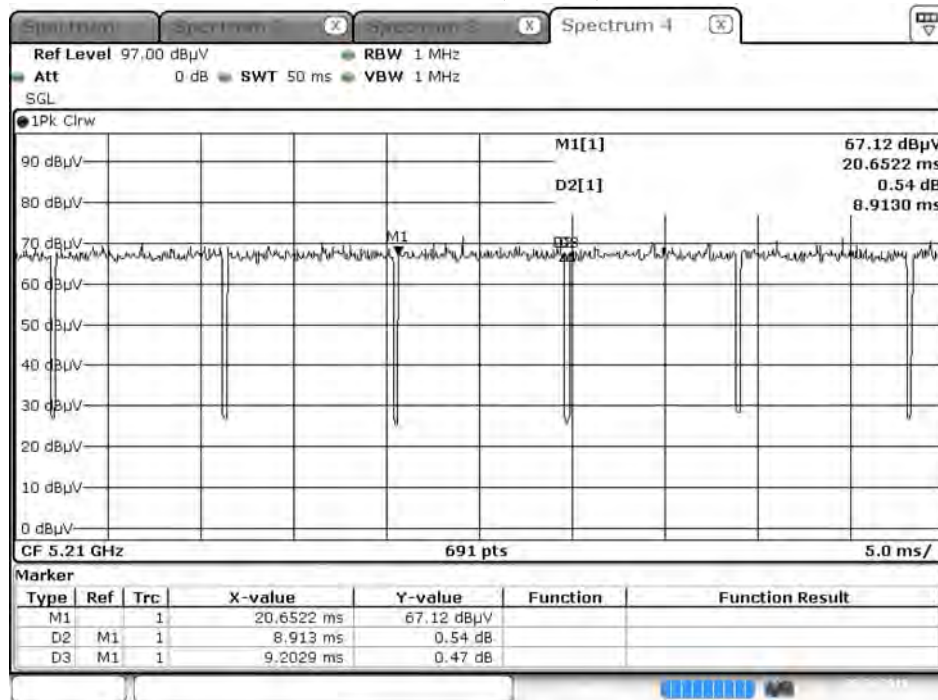

Date: 3 APR 2019 20:45:45

802.11ax160 (SISO B)

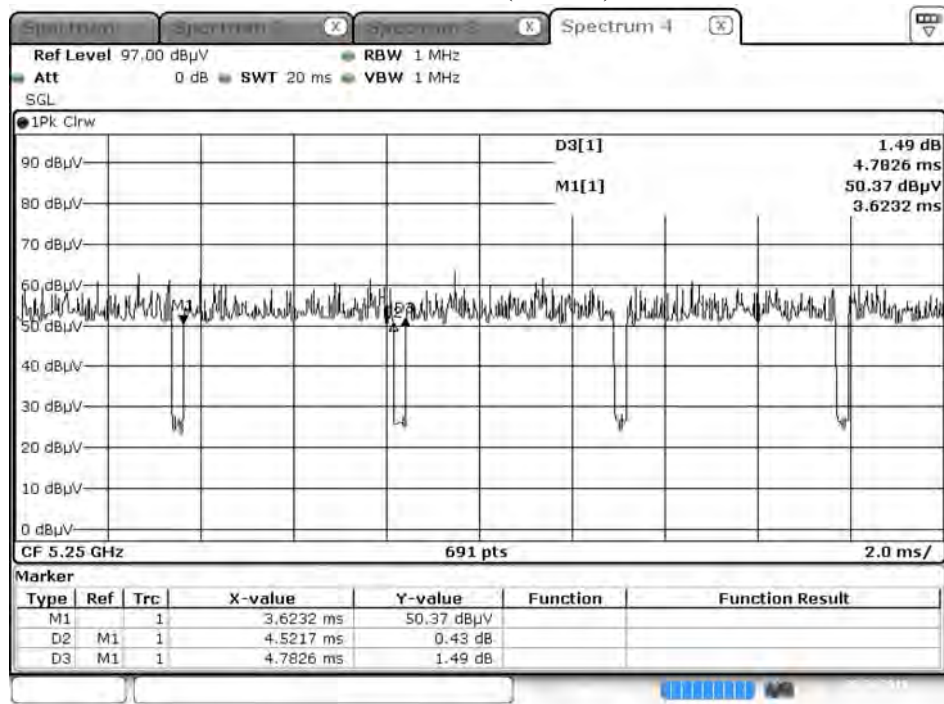

Date: 3 APR 2019 20:46:36

Product : Intel® Wi-Fi 6 AX200
Test Item : Duty Cycle
Test Mode : Mode 29: Transmit-MIMO

Duty Cycle Formula:


$\text{Duty Cycle} = \text{Ton} / (\text{Ton} + \text{Toff})$

$\text{Duty Factor} = 10 \text{ Log } (1/\text{Duty Cycle})$


Results:

5GHz band	Ton (ms)	Ton + Toff (ms)	Duty Cycle (%)	Duty Factor (dB)
802.11n20	18.5797	18.7681	99.00	0.04
802.11n40	8.9420	9.2754	96.41	0.16
802.11ac80	5.4638	5.7536	94.96	0.22
802.11ac160	2.7681	3.0435	90.95	0.41
802.11ax20	18.7101	19.0000	98.47	0.07
802.11ax40	9.3623	9.6522	97.00	0.13
802.11ax80	4.4783	4.7681	93.92	0.27
802.11ax160	2.2754	2.5507	89.21	0.50


802.11n20 (MIMO)

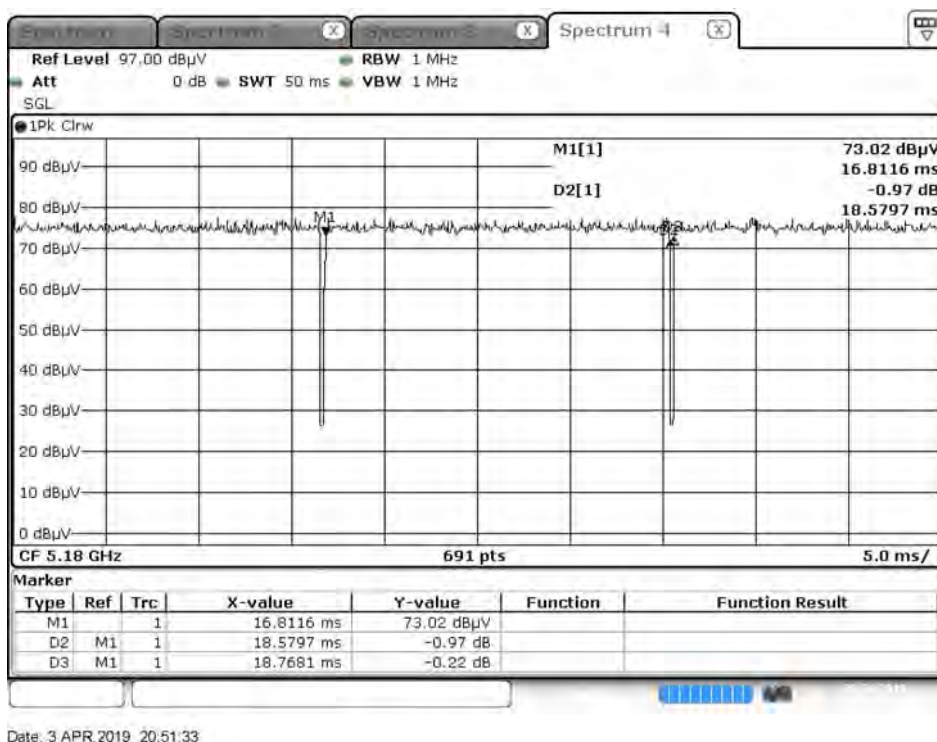


802.11n40 (MIMO)

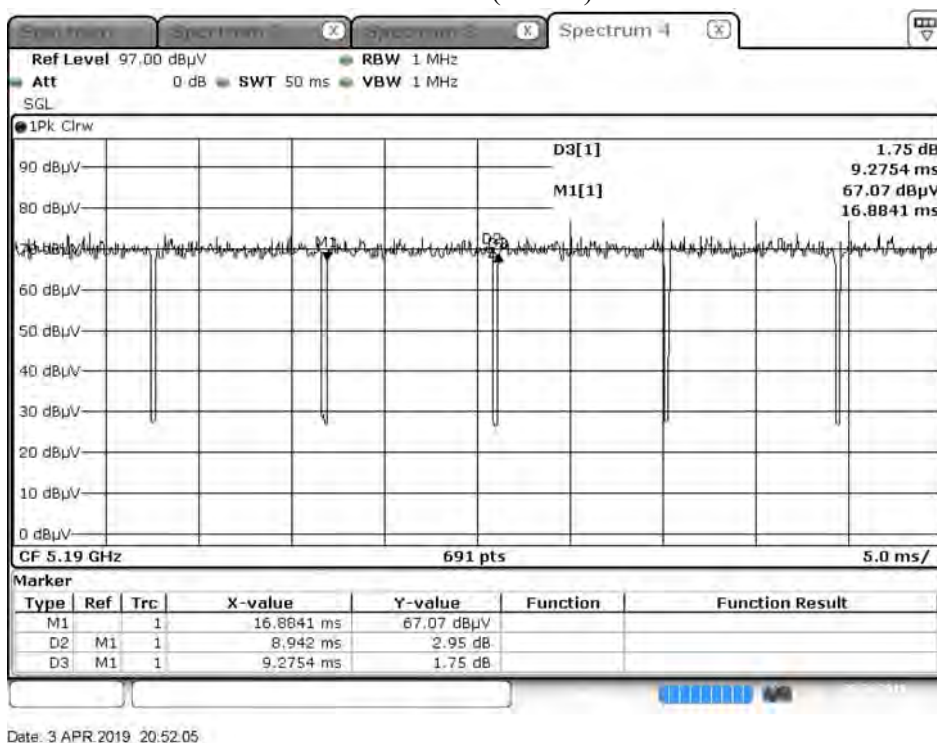


802.11ac80 (MIMO)

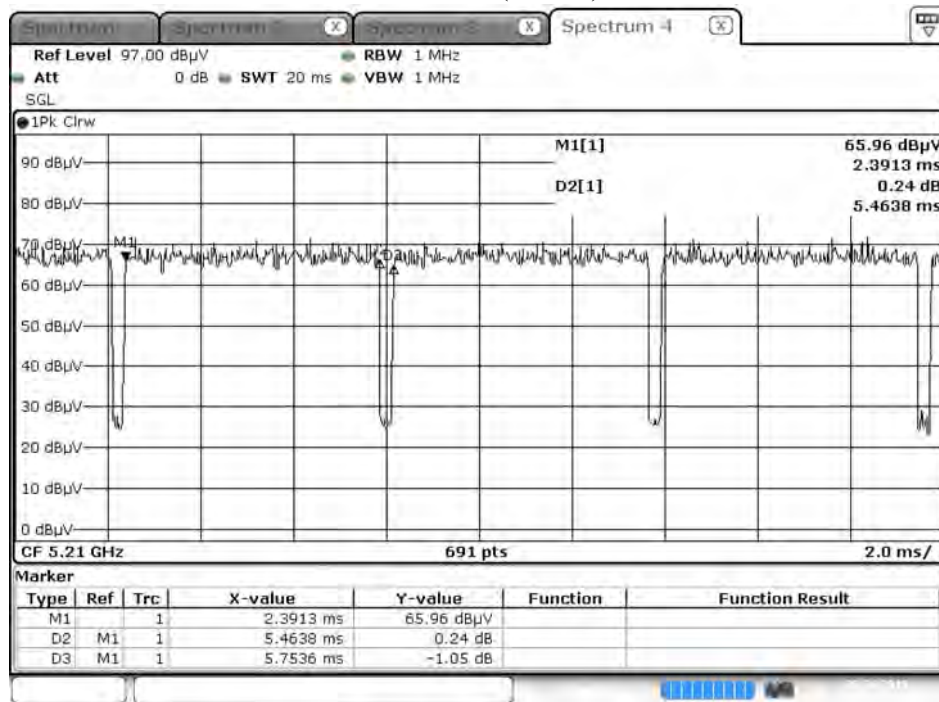

802.11ac160 (MIMO)

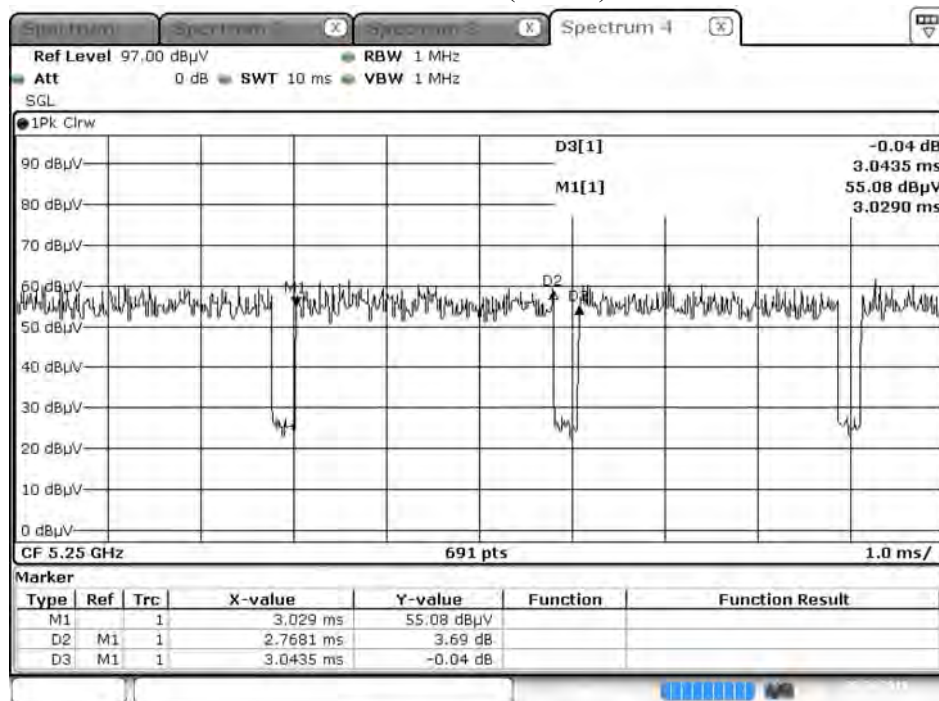


802.11ax20 (MIMO)

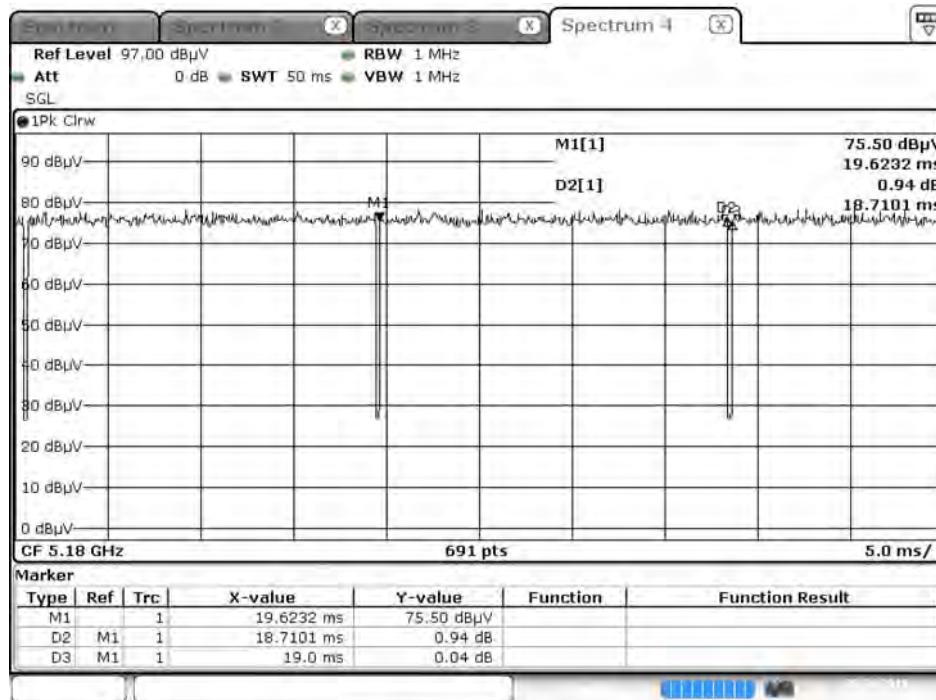


Date: 3 APR 2019 20:53:58

802.11ax40 (MIMO)

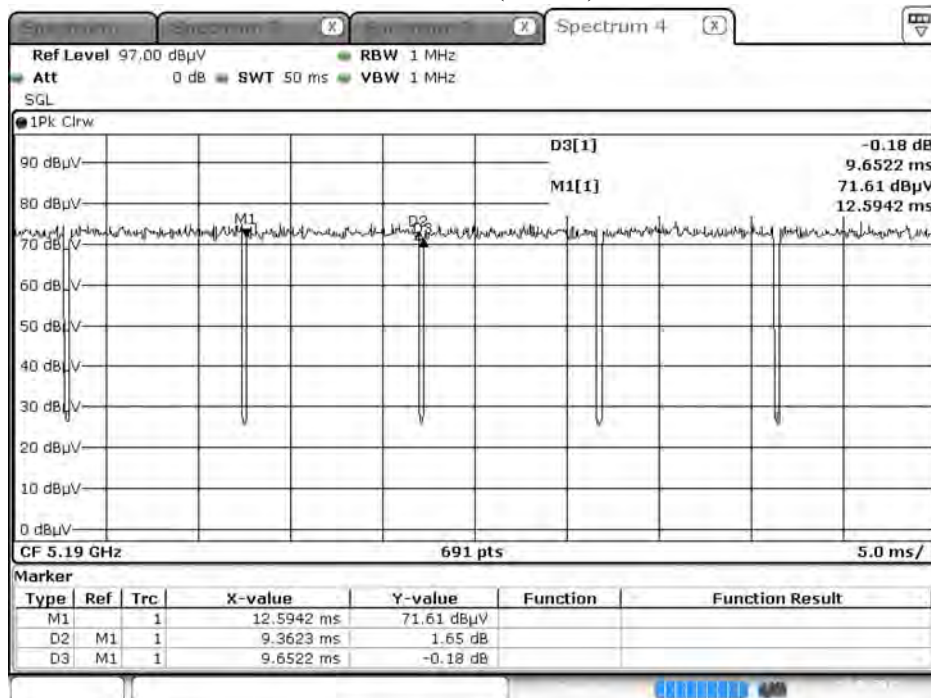


Date: 3 APR 2019 20:54:33

802.11ax80 (MIMO)

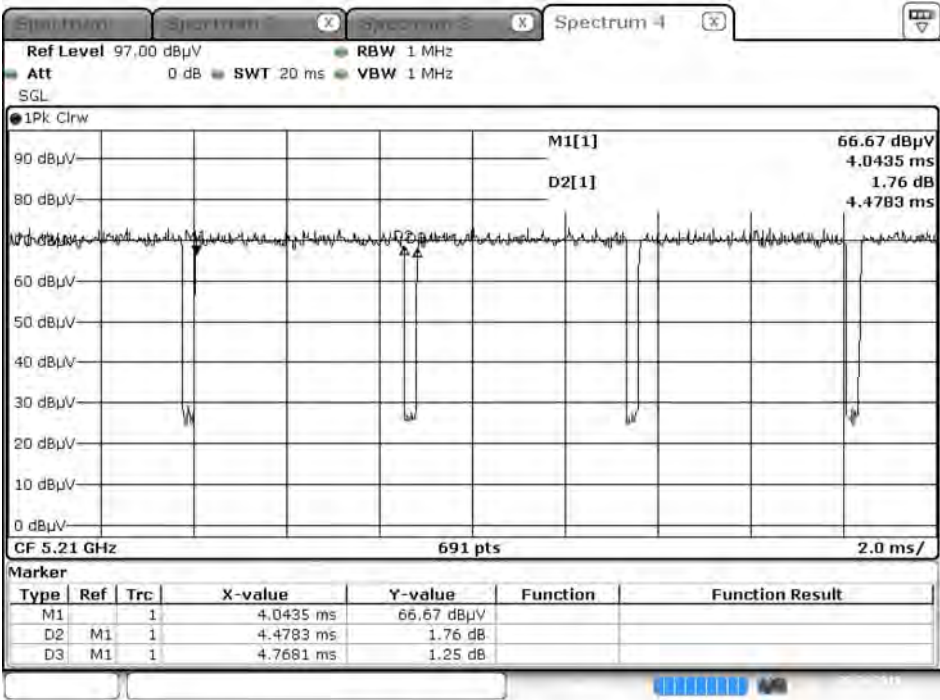

Date: 3 APR 2019 20:55:05

802.11ax160 (MIMO)

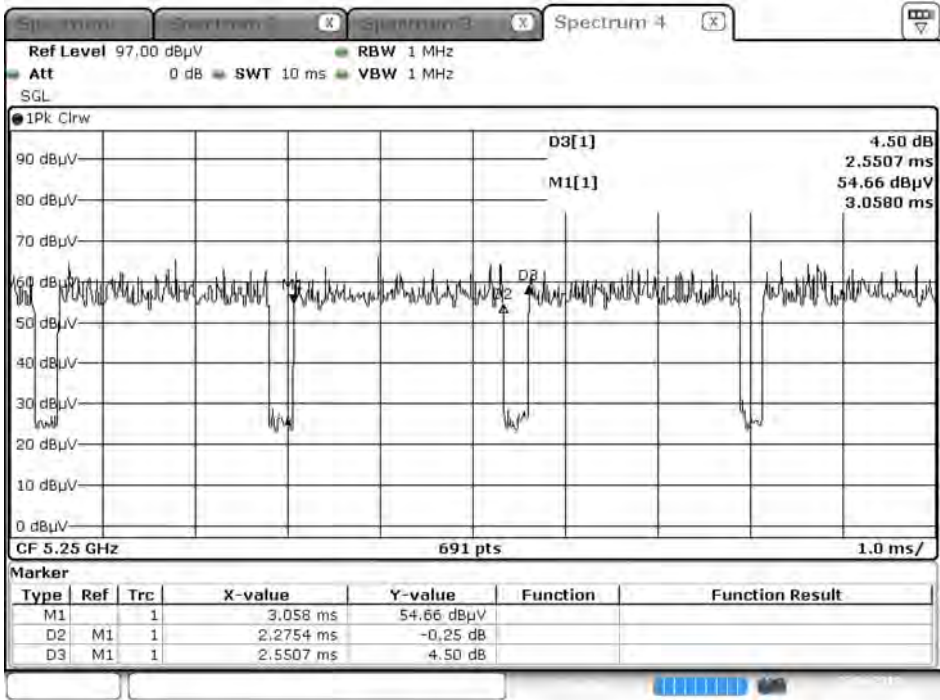

Date: 3 APR 2019 20:55:40

6. EMI Reduction Method During Compliance Testing

No modification was made during testing.