

## Regulatory WLAN Antenna Information (NB mode)

Platform information							
Brand	ODM	Platform model name (RMN)	Platform type (ex: Notebook PC, convertible PC, AIO...etc)			SAR minimum separation (mm)	
HP Inc.	Compal Corporation	TPN-C154	Convertible PC			15.52	
Antenna information							
Vendor		Type	Antenna Part number (Main/TX1)			Antenna Part number (Aux/ TX2)	
INPAQ		PIFA	DC33002JZ00 (WA-P-LBLB-02-128)			DC33002JZ00 (WA-P-LBLB-02-128)	
Peak gain w/ cable loss (dBi)							
2.4GHz 2400-2500MHz	5.2&5.3GHz 5150-5350MHz	5.5GHz 5470-5725MHz	5.8GHz 5725-5850MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	6.9GHz 6875-7125MHz
2.77	2.77	2.66	2.66	2.71	2.72	2.72	2.72
Module information							
Model	Form factor and suffixes ( NGW/ HMW AND AN/ NB/ BN...)						
AX211NGW (Garfield Peak 2)	Intel Garfield Peak 2 AX211 Wi-Fi 6e +Bluetooth 5.2 M.2 2230 160MHz CNVi WW WLAN						
AX411NGW (Garfield Peak 4)	Intel Garfield Peak 4 AX411 Wi-Fi 6e +Bluetooth 5.2 M.2 2230 160MHz CNVi WW WLAN						
Notes (marked with *)							
<p><b>* SAR minimum separation (mm)</b>            - Regular NB: Minimum antenna-to-body (from antenna bottom to the bottom of the device)            - Tablet / Convertible PC: Minimum antenna-to-edge (5 sides of the device)            - Mini-tablet: Minimum antenna-to-edge (6 sides of the device)</p> <p><b>* 3D Peak Antenna gain should be equal or greater than -2 dBi</b>            - If a host integrator plans to use a lower gain antenna of the same type, additional CBP(FCC)/EDT(EU) testing need to be performed while the module is installed in the host.</p>							

## Antenna Sample / Antenna Data Requirements for worldwide regulatory approval

Section	Description of Required OEM / ODM Antenna Information	US / IC	EU	Japan	Taiwan	S.Korea
1A	Part Number for Antenna only	Required	Required	Required	Required	Required
1B	Antenna Manufacturer Name	Required	Required	Required	Required	Required
1C	Description of Antenna Type	Required	N/A	N/A	N/A	N/A
1D	Part number of Antenna Assembly / cable impedance, length & diameter.	Required	Desired	Desired	Desired	Desired
1E	Tx1, Tx2 & Tx3 antenna (Peak Gain W/ cable loss) *	Required	Required	Required	Required	Required
	1E OR 1F, 1G, 1H					
1F	Tx1, Tx2 & Tx3 antenna (Peak Gain only) *	Required	Required	Required	Required	Required
1G	VSWR of cable including connector	Required	Required	Required	Required	Required
1H	Tx1, Tx2 & Tx3 antenna (Cable loss W/ connector) *	Required	Required	Required	Required	Required
2	Dimensioned Photographs <u>and</u> Drawings of Tx1, Tx2, and Tx3 (or Rx3) antennas	Required	Required	Required	Required	Required
3	Radiation patterns of antennas loaded in the host platform.	Required	Desired	Required	N/A	Required
4	Platform model name / number - correlated to antenna manufacturer and antenna part number	Required	Required	Desired	Required	Desired
5	Photograph(s) or Drawings showing location of antennas in platform. <u>(S. Korea requires photographs of antennas for approval submission). Taiwan requires pictures of each antenna type shown in the system.</u>	Required	Required	Desired	<u>Required (Photos)</u>	<u>Required (Photos)</u>
6	Mech. drawings / photos with dimensions of antenna locations and distance from end-user (For evaluation of SAR testing requirement).	Required	N/A	N/A	N/A	N/A
7	Photograph(s) or Drawings showing the location of all antennas (WLAN, other) and distance between those transmitting antennas. Information will be used to evaluate whether co-location testing is required.	Required	N/A	N/A	N/A	N/A
8	Local representative contact information for LMA/ PARS process.	Required	N/A	N/A	N/A	N/A

# Antenna Information

## Section 1. Antenna Assembly Specifications


1A Antenna Part Number	1B Manu-facturer	1C Antenna Type	1D Cable Assembly Part Number and Information	Freq Range MHz	1E *Peak Gain W/ Cable loss (dBi)	1F Peak Gain w/o Cable Loss (dBi)	1G Max VSWR	1H Cable Loss (dB)
P/N: DC33002JZ00 (Vendor P/N: WA-P-LBLB-02-128) Main Antenna	INPAQ	PIFA	50 ohm Coaxial length: 195mm diameter: 1.13mm I-PEX MHF-4L	2400-2500	2.77	3.19	3	0.42
				5150-5250	2.75	3.34	3	0.59
				5250-5350	2.75	3.37	3	0.62
				5470-5725	2.49	3.13	3	0.64
				5725-5850	2.62	3.27	3	0.65
				5925-6425	2.55	3.23	3	0.68
				6425-6525	2.72	3.41	3	0.69
				6525-6875	2.72	3.43	3	0.71
				6875-7125	2.67	3.40	3	0.73
P/N: DC33002JZ00 (Vendor P/N: WA-P-LBLB-02-128) Aux Antenna	INPAQ	PIFA	50 ohm Coaxial length:132mm diameter: 1.13mm I-PEX MHF-4L	2400-2500	2.68	3.26	3	0.58
				5150-5250	2.77	3.61	3	0.84
				5250-5350	2.49	3.36	3	0.87
				5470-5725	2.66	3.55	3	0.89
				5725-5850	2.66	3.57	3	0.91
				5925-6425	2.71	3.66	3	0.95
				6425-6525	2.41	3.38	3	0.97
				6525-6875	2.52	3.51	3	0.99
				6875-7125	2.72	3.74	3	1.02

- Antenna Peak Gain required being test in system basis.
- 1E frame contend absolutely peak antenna gain include H/V
- The antenna gain was measured in Anechoic Chamber


## Section 2. Dimensioned Photos or Drawings of Antennas

Include a dimensioned photo and dimensioned drawing of Tx1 antenna here.

### Tx1 Antenna Dimensioned Drawing:

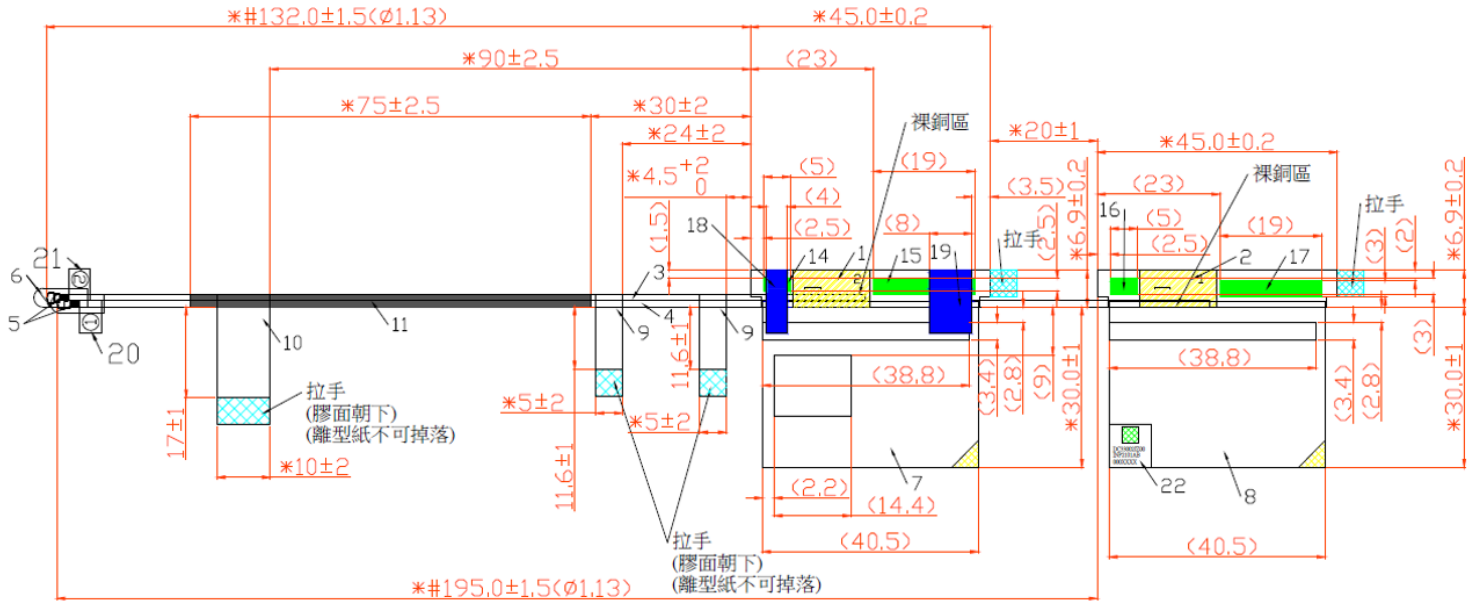


### Tx1 Antenna Photo:

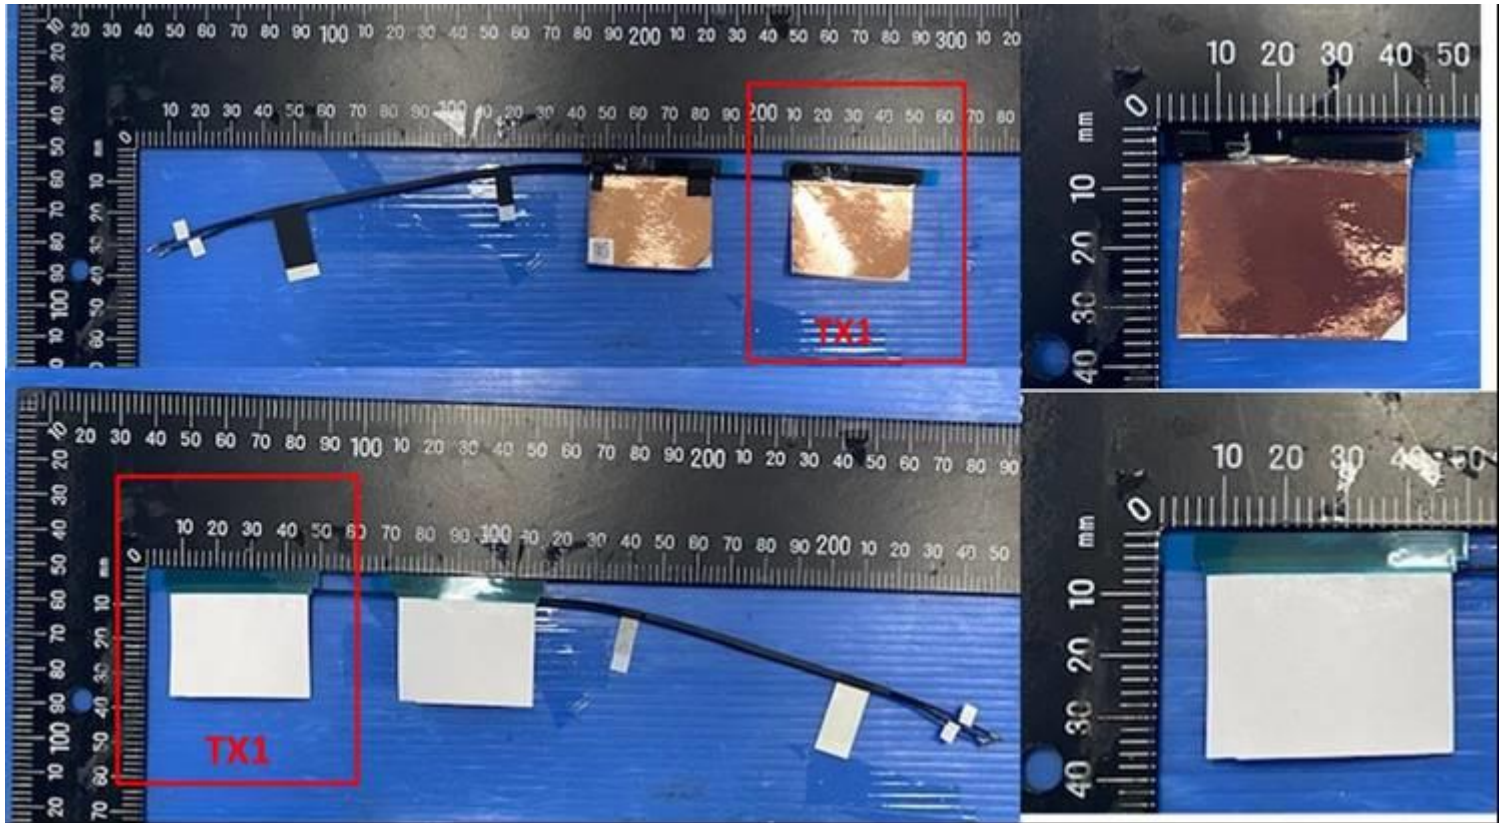




Include a dimensioned photo and dimensioned drawing of Tx2 (or Rx2) antenna here.

**Tx2 (or Rx2) Antenna Dimensioned Drawing:**

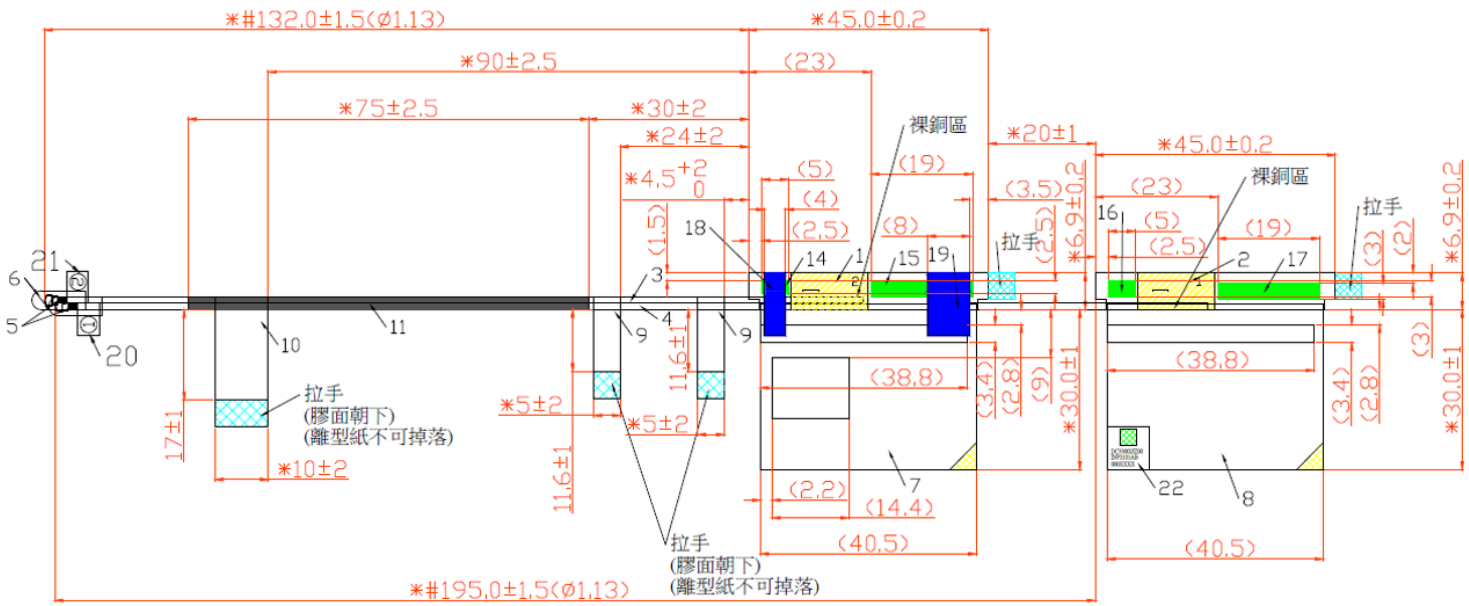

**Tx2 (or Rx2) Antenna Photo:**

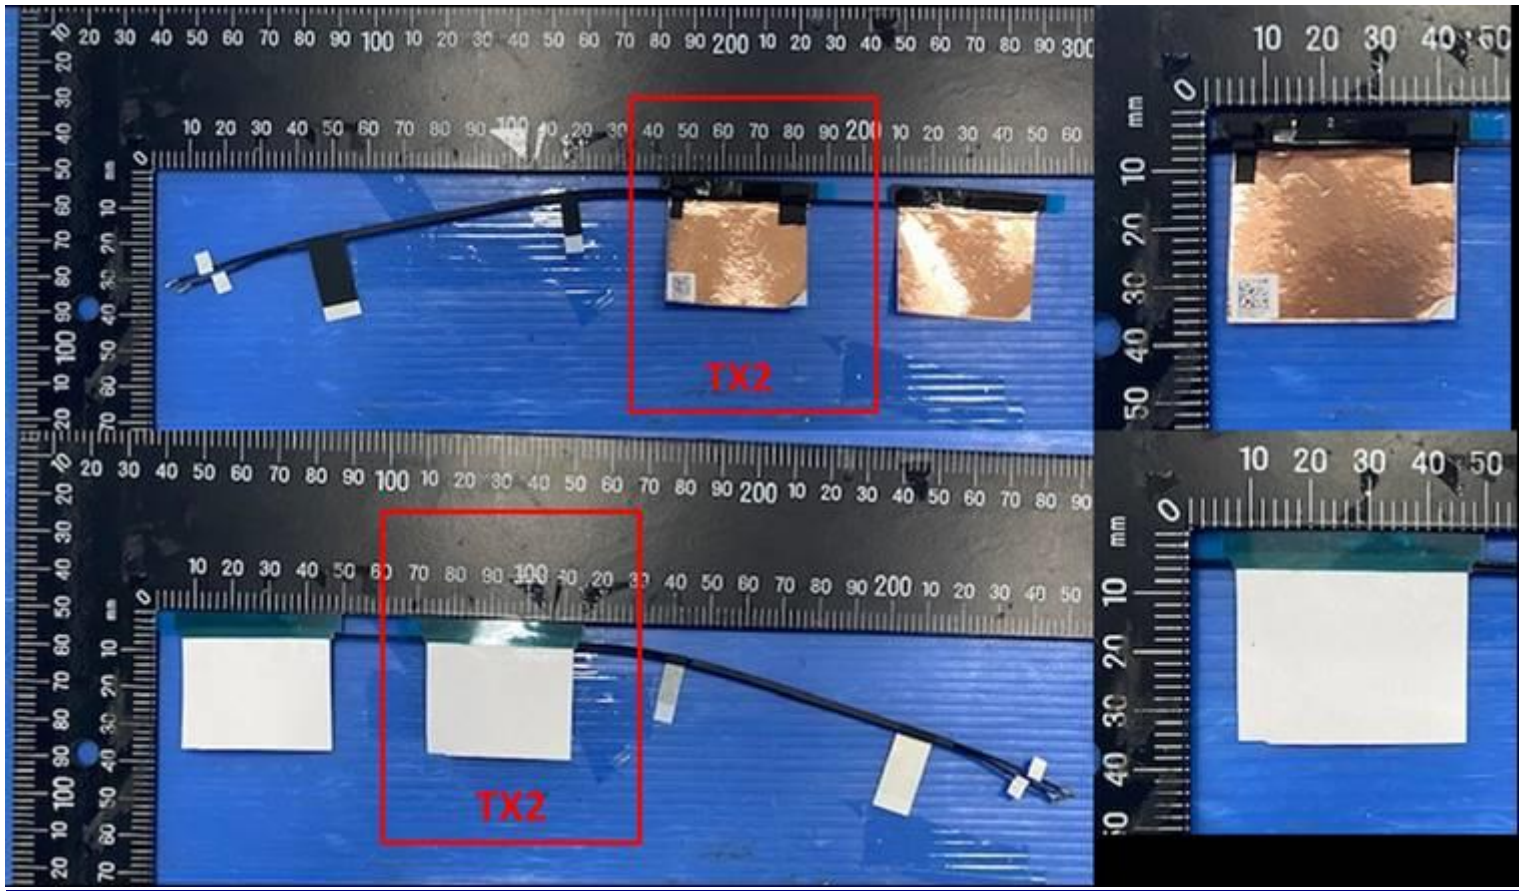


Note: antenna photo should include L type ruler

Include front view photo of all 2 antennas here.

Antenna Manufacturer: INPAQ

Antenna Part Number: DC33002JZ00(WA-P-LBLB-02-128) (Tx1), (Tx2 or Rx2)

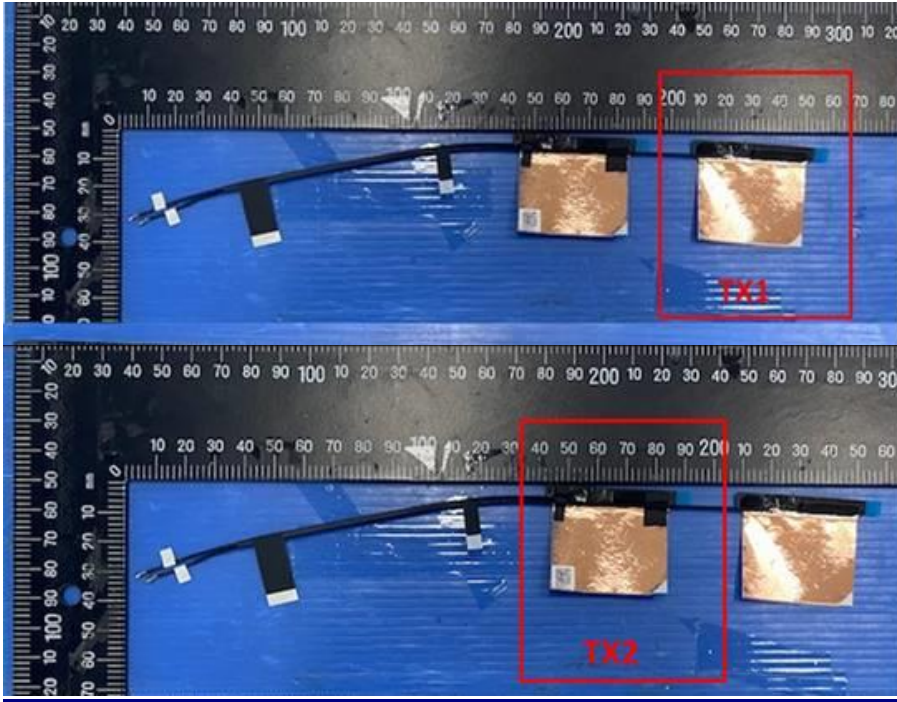


Note: antenna photo should include L type ruler

Include back view photo of all 2 antennas here.

Antenna Manufacturer: INPAQ


Antenna Part Number: DC33002JZ00(WA-P-LBLB-02-128) (Tx1), (Tx2 or Rx2)

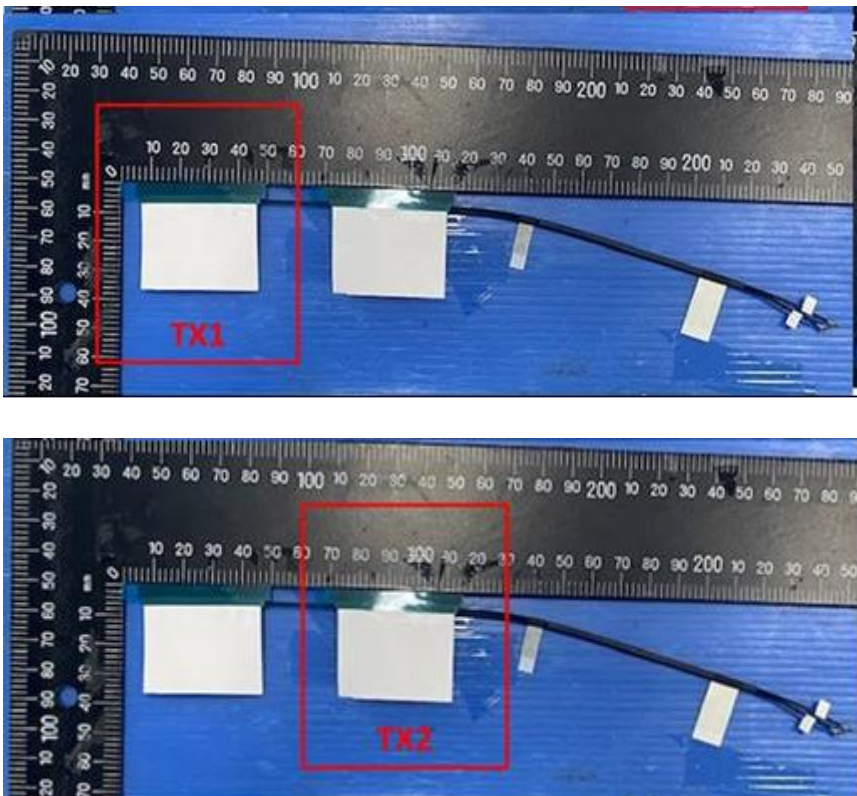

## Section 3. Radiation characteristics of antennae Loaded in Host Platform


### 2400-2500MHz radiation characteristic (1E Peak Gain W/ Cable loss (dBi))

Main antenna:

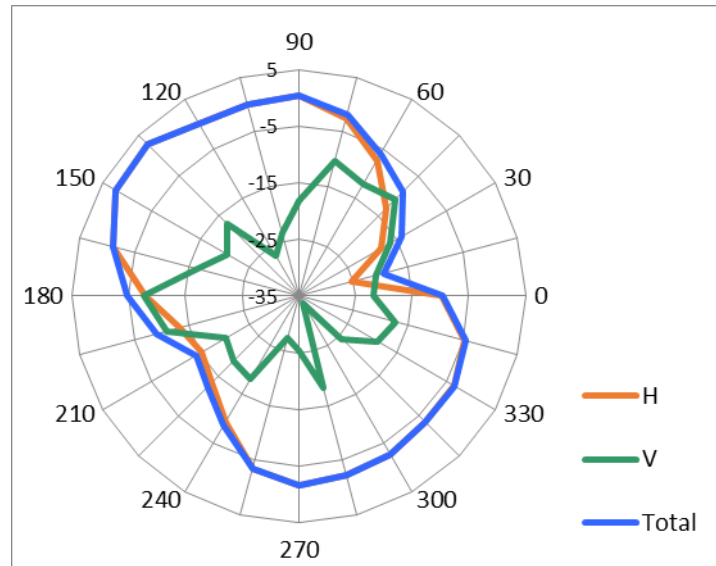

Center Frequency	<b>2400-2500 MHz</b>
Horizontal+ Vertical (dBi) peak	<b>2.77</b>


Aux antenna:

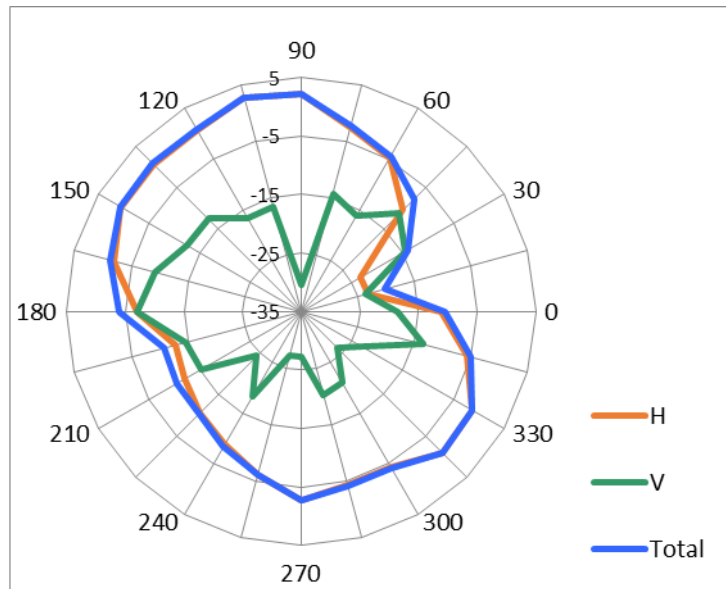

Center Frequency	<b>2400-2500 MHz</b>
Horizontal+ Vertical (dBi) peak	<b>2.68</b>


**5150-5250MHz radiation characteristic**

**Main antenna:**

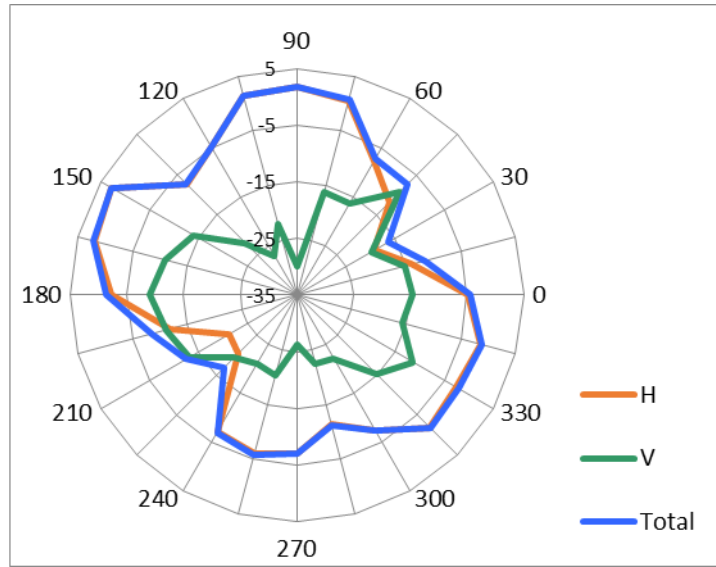

Horizontal+ Vertical (dBi) peak	2.75
---------------------------------	------

**Aux antenna:**

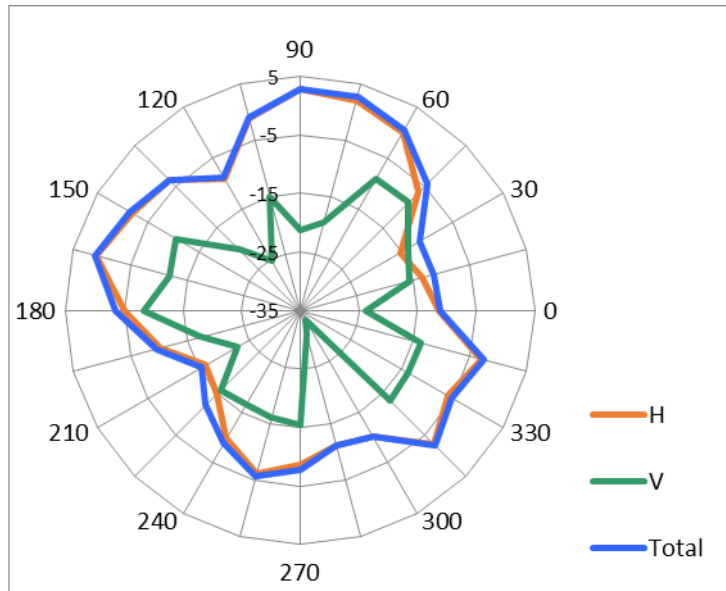


Horizontal+ Vertical (dBi) peak	2.77
---------------------------------	------




### 5250-5350MHz radiation characteristic

#### Main antenna:

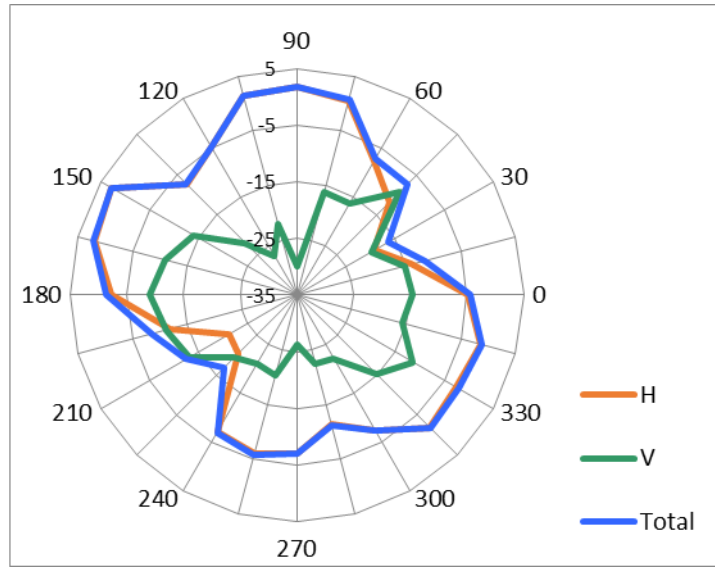

Horizontal+ Vertical (dBi) peak	2.75
---------------------------------	------


#### Aux antenna:

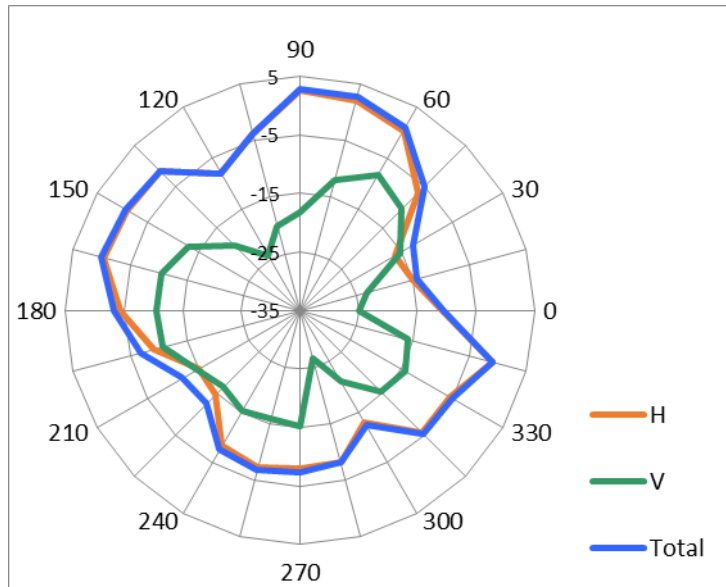

Horizontal+ Vertical (dBi) peak	2.49
---------------------------------	------


**5470-5725MHz radiation characteristic(1E Peak Gain W/ Cable loss (dBi))**

**Main antenna:**

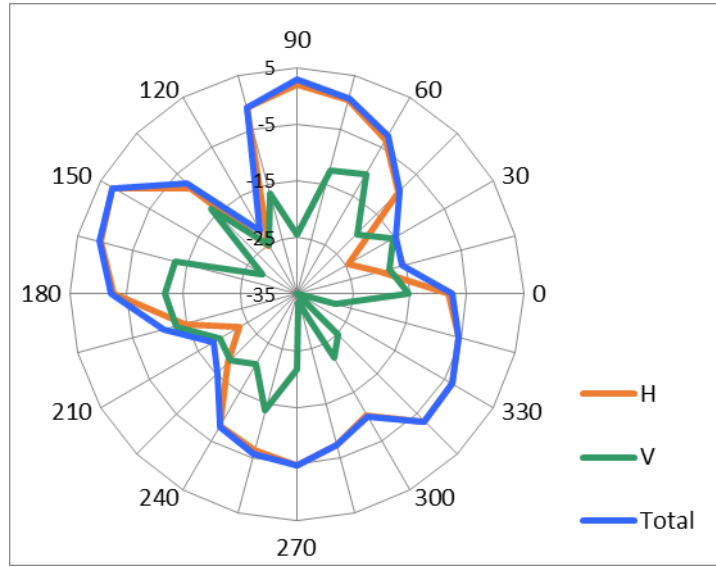

Horizontal+ Vertical (dBi) peak	2.49
---------------------------------	------


**Aux antenna:**

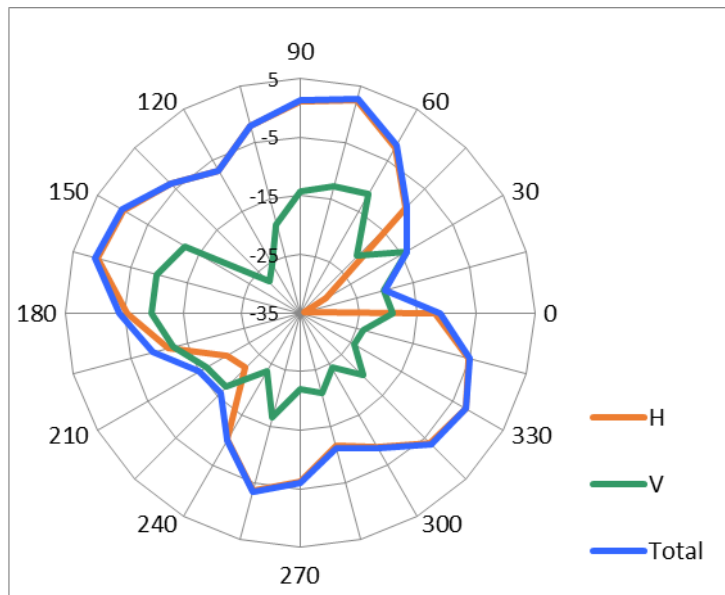

Horizontal+ Vertical (dBi) peak	2.66
---------------------------------	------


**5725-5850MHz radiation characteristic**(1E Peak Gain W/ Cable loss (dBi))

**Main antenna:**

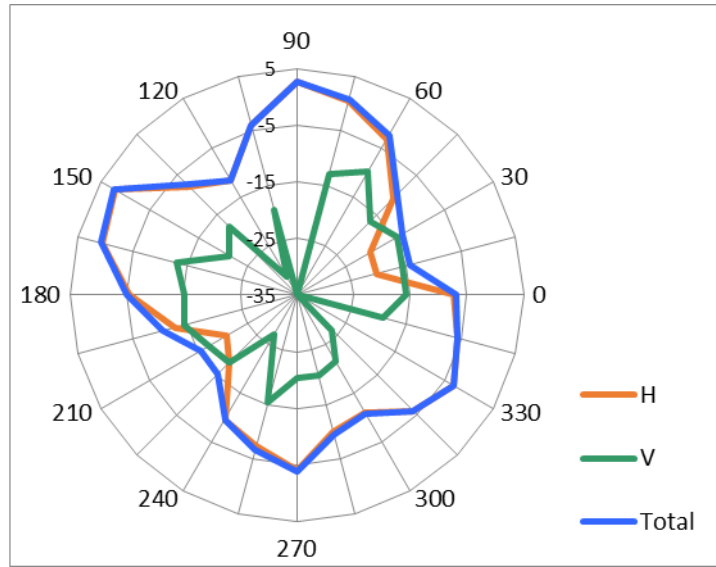

Horizontal+ Vertical (dBi) peak	2.62
---------------------------------	------


**Aux antenna:**

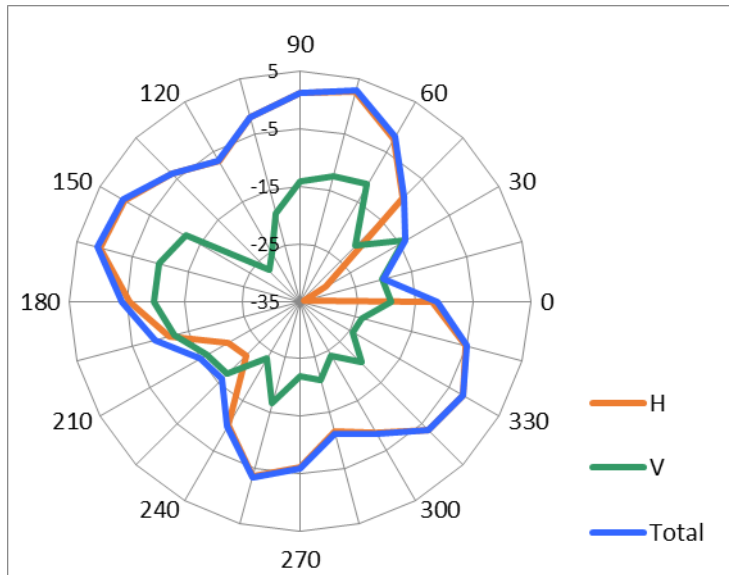

Horizontal+ Vertical (dBi) peak	2.66
---------------------------------	------


**5925-6425MHz radiation characteristic**(1E Peak Gain W/ Cable loss (dBi))

**Main antenna:**

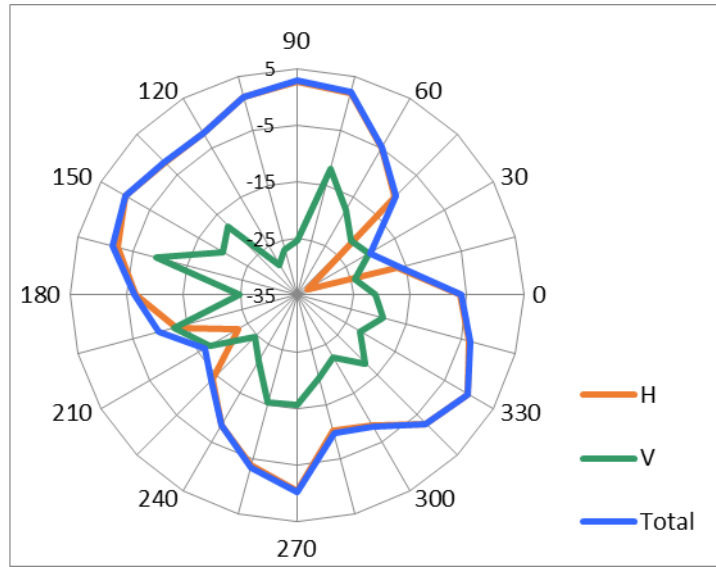

Horizontal+ Vertical (dBi) peak	2.55
---------------------------------	------

**Aux antenna:**

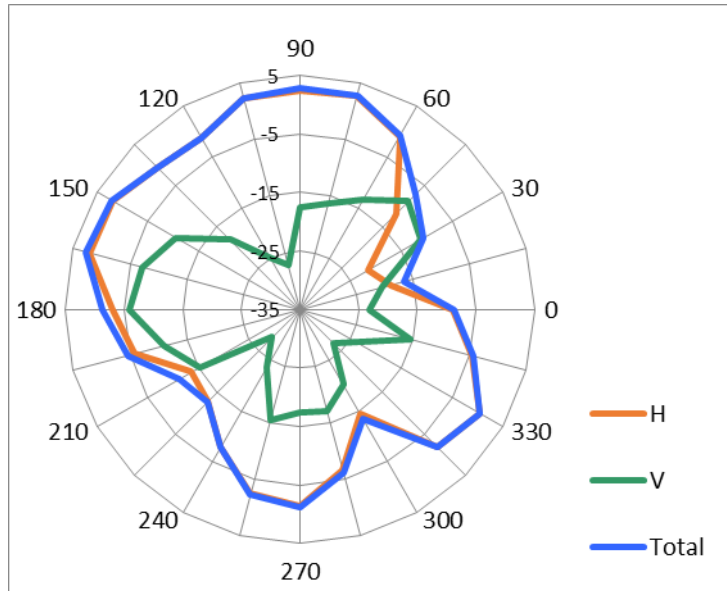


Horizontal+ Vertical (dBi) peak	2.71
---------------------------------	------




**6425-6525MHz radiation characteristic** (1E Peak Gain W/ Cable loss (dBi))

**Main antenna:**

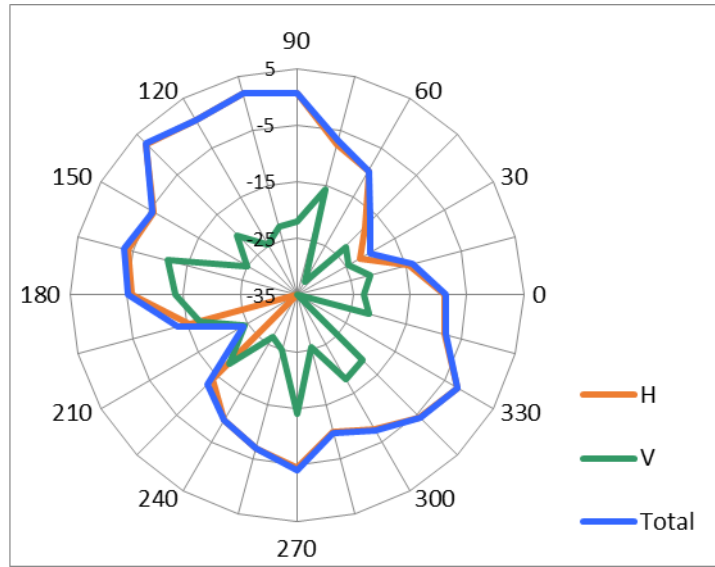

Horizontal+ Vertical (dBi) peak	2.72
---------------------------------	------


**Aux antenna:**

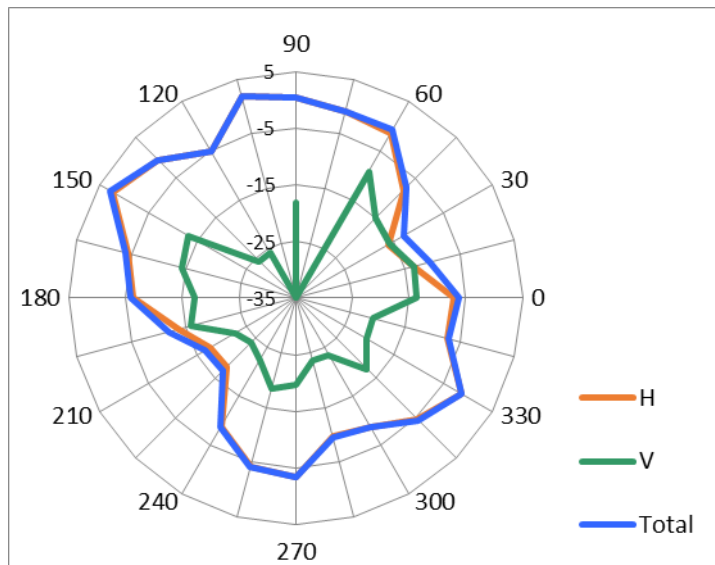

Horizontal+ Vertical (dBi) peak	2.41
---------------------------------	------


**6525-6875MHz radiation characteristic(1E Peak Gain W/ Cable loss (dBi))**

**Main antenna:**

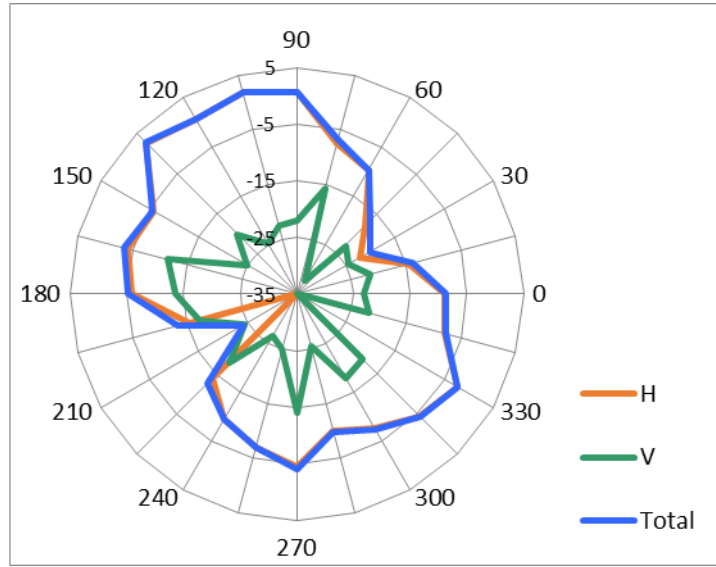

Horizontal+ Vertical (dBi) peak	2.72
---------------------------------	------


**Aux antenna:**

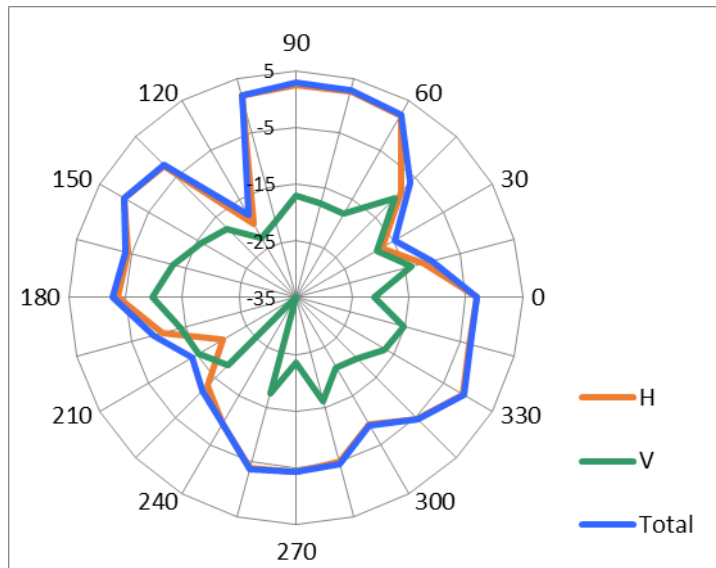

Horizontal+ Vertical (dBi) peak	2.52
---------------------------------	------


**6875-7125MHz radiation characteristic**(1E Peak Gain W/ Cable loss (dBi))

**Main antenna:**

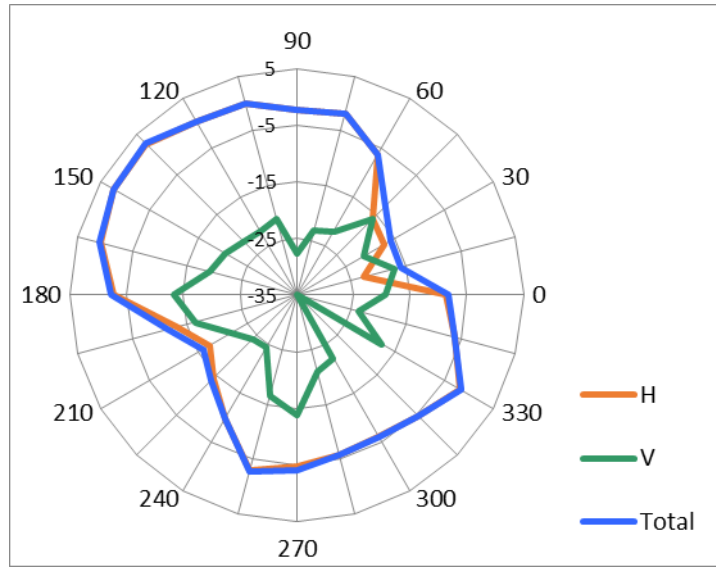

Horizontal+ Vertical (dBi) peak	2.67
---------------------------------	------


**Aux antenna:**

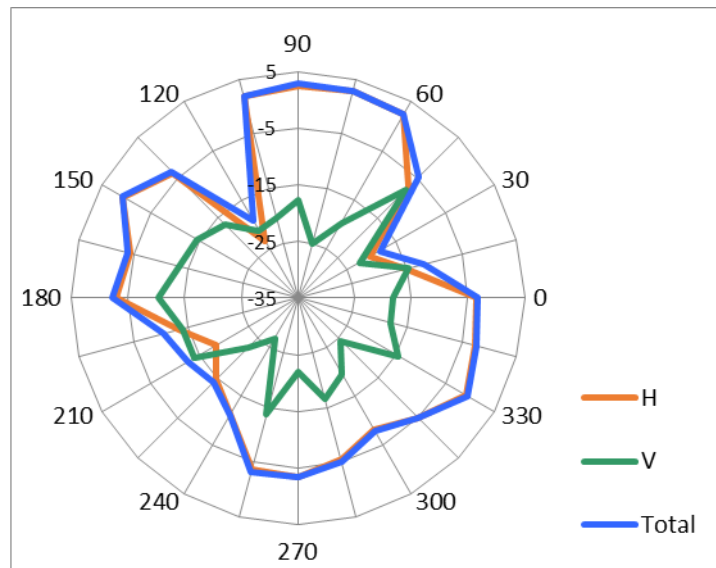

Horizontal+ Vertical (dBi) peak	2.72
---------------------------------	------

## Section 4. Antenna Host Platform Location Information



Include a **dimensioned photo(s) or dimensioned drawing(s)** of Main and Aux antenna placements (measurements are not required for receive-only antenna). Any antenna that transmits must show dimensions to bottom of laptop. Provide a description of the materials that are used for supporting or surrounding transmit antennas; for example, non-conductive plastics vs. conductive coated plastic or metallic materials.

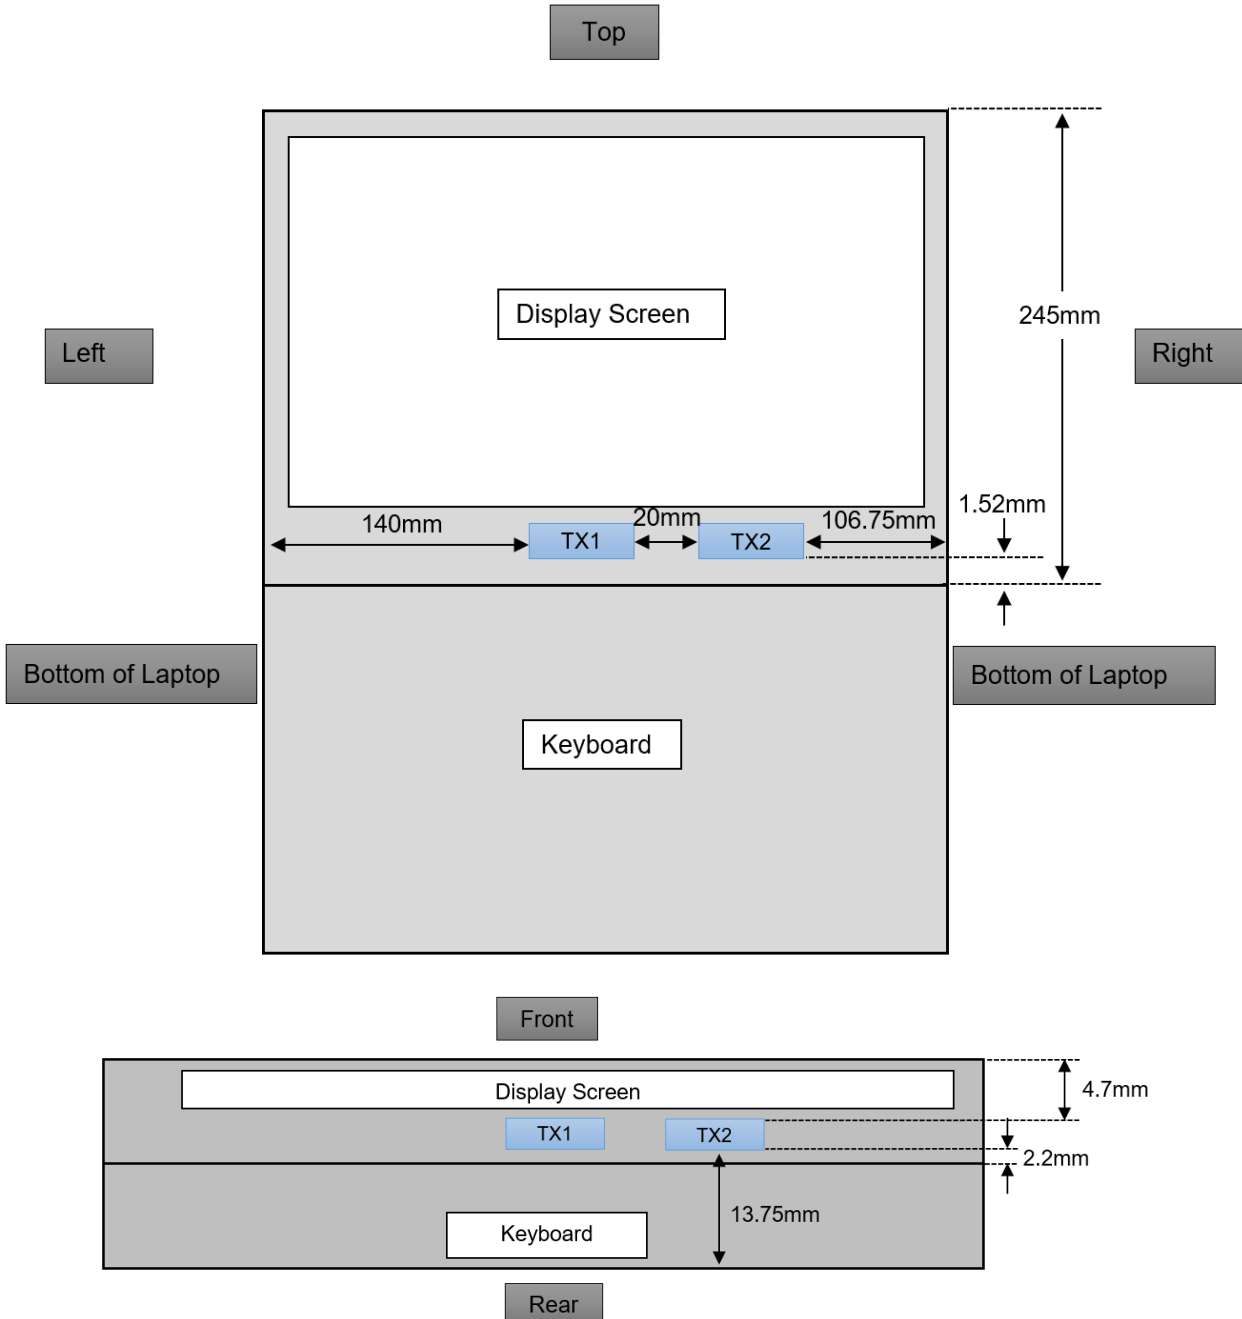



## Section 5. Antenna dimensional information for SAR evaluation

Include a **dimensioned photo(s) or dimensioned drawing(s)** showing the distance (mm) between the transmit antennas and the user. For notebook/laptop hosts show lapheld position (example below). For tablet hosts show all orientations including lapheld, primary & secondary portrait, primary & secondary landscape positions. Include a description of any proximity sensors or power throttling implementations that limit or exclude use of any host orientation.

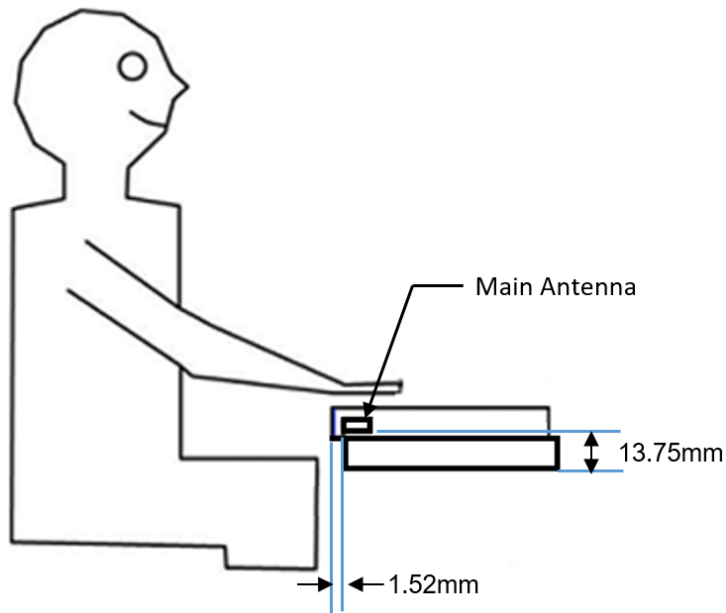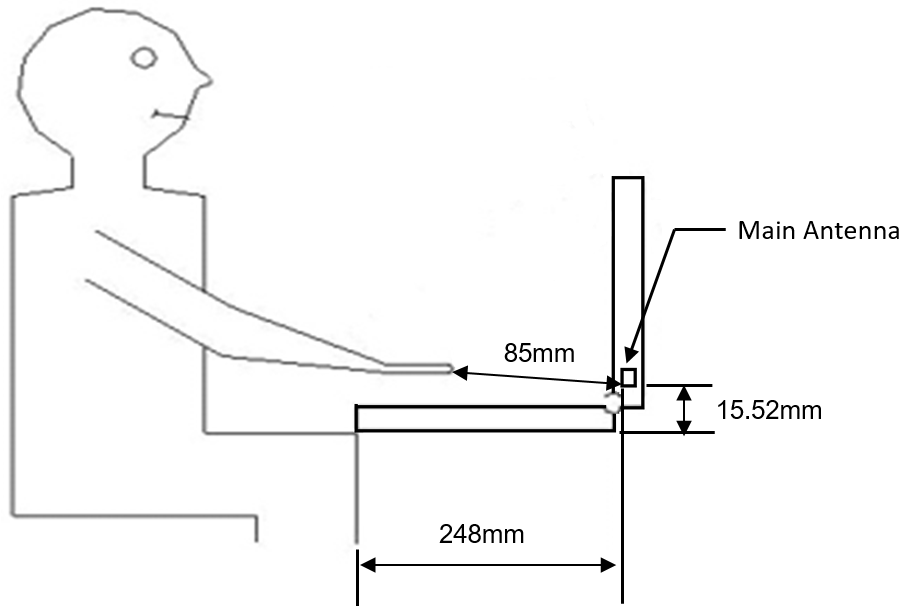

## Section 6. Diagram Example of Co-Location Antenna Separation

Include a **dimensioned photo or dimensioned drawing** showing the distance (mm) between all WLAN transmit antennas and other co-located radiator transmit antenna such as Bluetooth, WWAN,..

(Note: Due to the evolving rules regarding co-location, each platform will need to be reviewed on a case by case basis)

