

FCC Part 15C Compliance Test Report

Test Report no.:	FCC15CWLNg_RM-807_24.docx	Date of Report:	05-Mar-2012
Number of pages:	16	Customer's Contact person:	Huhtala Tero
Testing laboratory:	TCC Nokia Tampere Laboratory P.O. Box 68 Sinitaival 5 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880	Customer:	Nokia Corporation P.O. Box 68 Sinitaival 5 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880
FCC listing no.:	94436		
IC recognition no.:	661AK-1		
Tested devices/ accessories:	Phone RM-807 / Battery BV-4D / Charger AC-50E / Data Cable CA-190CD / Headset WH-209		
FCC ID:	PDNRM-807	IC:	661R-RM807
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards, RSS-210 (Issue 8, December 2010). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Jari Jantunen, System Manager, EMC

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	02-Feb-2012
Testing completed	22-Feb-2012
The customer's contact person	Huhtala Tero
Test Plan referred to	T:\Projects\RM-807\TestPlan\RS_testplan_RM-807.xls
Notes	-
Document name	T:\Projects\RM-807\EMC\FCC15CWLANg_RM-807_24.docx

1.1. EUT and Accessory Information

The EUT is a mobile phone with following features:

GSM/WCDMA/WLAN/Bluetooth/FM Transmitter

The EUT is tested with maximum rated TX power, modulated with pseudo random bit sequence (PRBS9).

Devices under tests

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-807	004402137764498	2010	-	112.010.0805	42774
Battery	BV-4D	4175352012A10401710;0670613	Proto V4 PWB V1.1	-	-	42775
Charger	AC-50E	4090492023260400312;0675619	0.5	0.4	-	42776
Data Cable	CA-190CD	-	-	-	-	42778
Headset	WH-209	-	0.5	0.1	-	42777

1.2. Summary of Test Results

WLAN:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8.4 (4)	Conducted peak output power	NP
15.247(d), 15.205(b)	A8.5	Band edge compliance of RF emissions	PASSED
15.247(d)	A8.5	Spurious RF conducted emissions	NP
15.247(d), 15.209	A8.5	Spurious radiated emissions	PASSED
15.207	7.2.2	AC powerline conducted emissions	NP
15.247(a)(2)	A8.2 (a)	6dB(bandwidth)	NP
15.247(e)	A8.2 (b)	Power spectral density	NP

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.

The test was not performed by the TCC Nokia Laboratory.


CONTENTS

1. Summary for FCC Part 15C Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Band edge compliance of RF emissions (FCC §15.247(d), 15.205(b), RSS-210 A8.5)	4
2.2. Test method and limit	4
2.3. WLAN Test results.....	5
3. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5)	9
3.2. Test method and limit	9
3.3. WLAN Test results.....	11
4. Test Equipment.....	15
4.1. Conducted measurements	15
4.2. Radiated measurements	15

2. Band edge compliance of RF emissions (FCC §15.247(d), 15.205(b), RSS-210 A8.5)

EUT with DUT number	RM-807, DUT 42774
Accessories with DUT numbers	BV-4D, DUT 42775 ; AC-50E, DUT 42776 ; CA-190CD, DUT 42778 ; WH-209, DUT 42777
Operation Voltage [V] / [Hz]	115 / 60
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	25 / 53 / 98.8
Date of measurements	22-Feb-2012
Measured by	Timo Raiskio

2.1.1 Test Setup

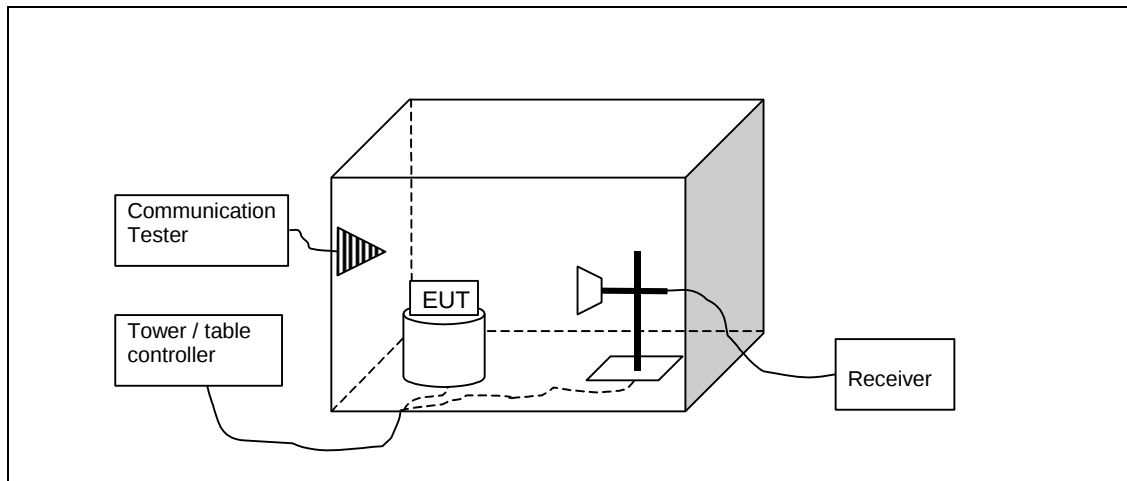

2.2. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210.

Limits for band edge compliance of RF emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit Average [dBμV/m]	Limit Peak [dBμV/m]
Below 2390 and above 2483.5	<=54	<=74

2.3. WLAN Test results


Average (RBW: 1 MHz, VBW: 1 MHz)

Channel / f_c [MHz]	E [dB μ V/m]	Result
1 / 2412 (DSSS, QPSK, 11)	36.47	PASSED
11 / 2462 (DSSS, QPSK, 11)	37.85	PASSED
1 / 2412 (OFDM, BPSK, 6)	44.75	PASSED
11 / 2462 (OFDM, BPSK, 6)	46.95	PASSED
1 / 2412 (802.11n HT20 MCS0)	46.68	PASSED
11 / 2462 (802.11n HT20 MCS0)	49.43	PASSED


Peak (RBW: 1 MHz, VBW: 1 MHz)

Channel / f_c [MHz]	E [dB μ V/m]	Result
1 / 2412 (DSSS, QPSK, 11)	47.07	PASSED
11 / 2462 (DSSS, QPSK, 11)	48.67	PASSED
1 / 2412 (OFDM, BPSK, 6)	60.51	PASSED
11 / 2462 (OFDM, BPSK, 6)	65.51	PASSED
1 / 2412 (802.11n HT20 MCS0)	64.54	PASSED
11 / 2462 (802.11n HT20 MCS0)	67.06	PASSED


DSSS mode, QPSK modulation, 11 Mbps data rate. Channel 1 / 2412 MHz

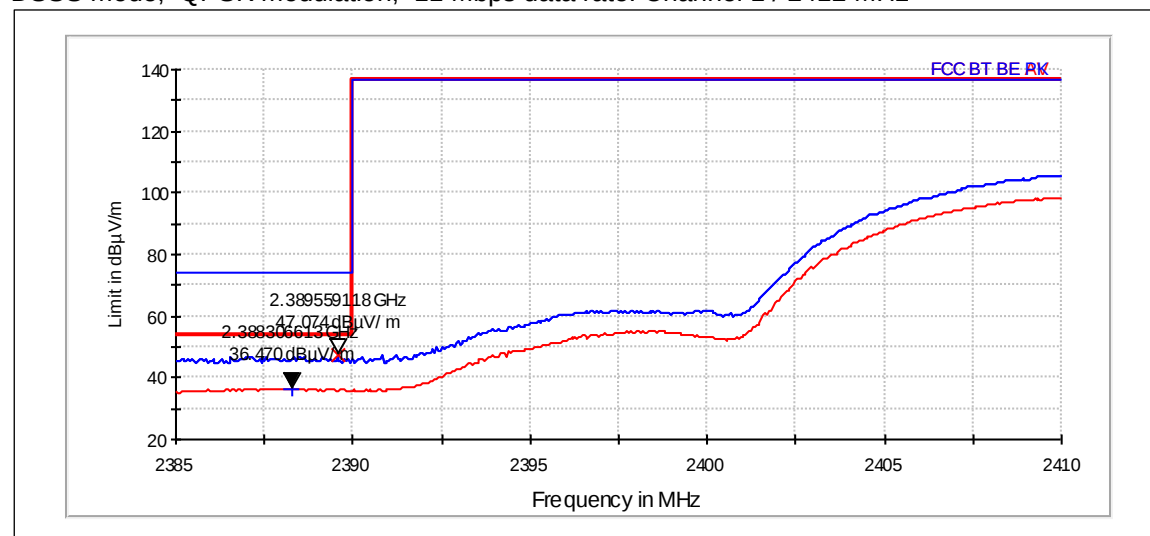


DSSS mode, QPSK modulation, 11 Mbps data rate. Channel 11 / 2462 MHz

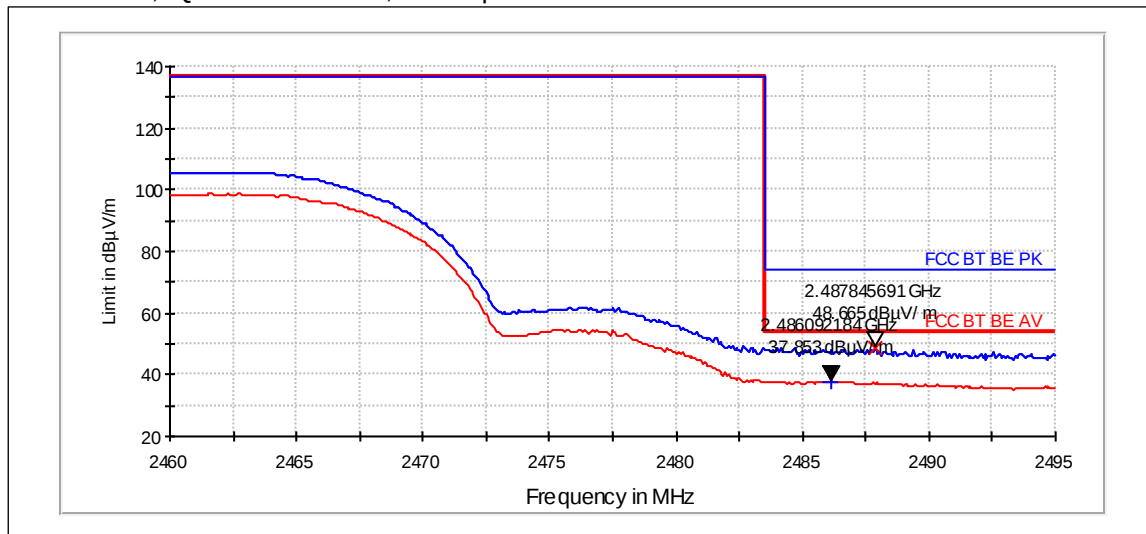


OFDM mode, BPSK modulation, 6 Mbps data rate. Channel 1 / 2412 MHz

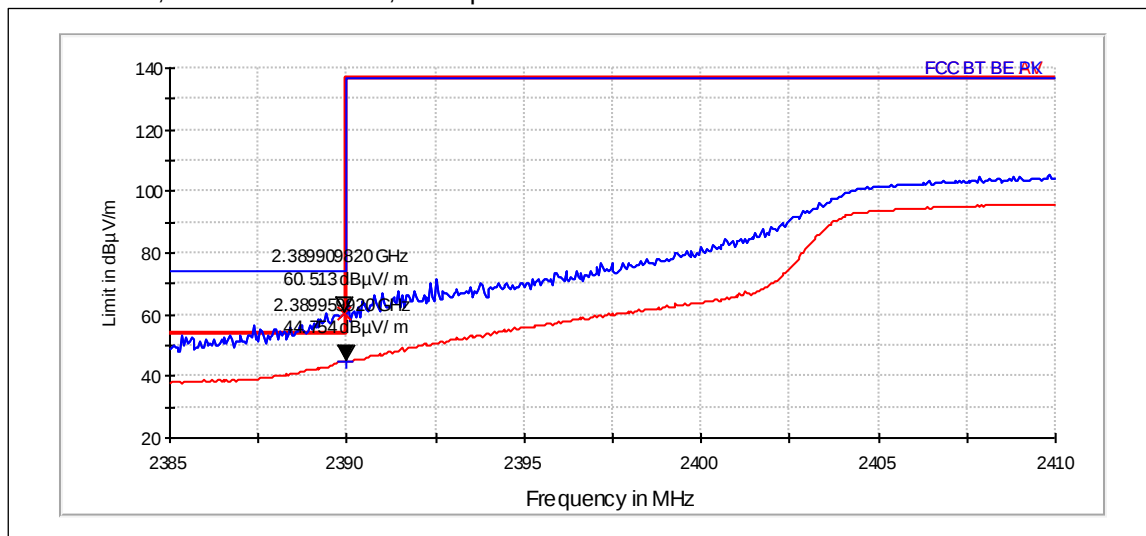


OFDM mode, BPSK modulation, 6 Mbps data rate. Channel 11 / 2462 MHz

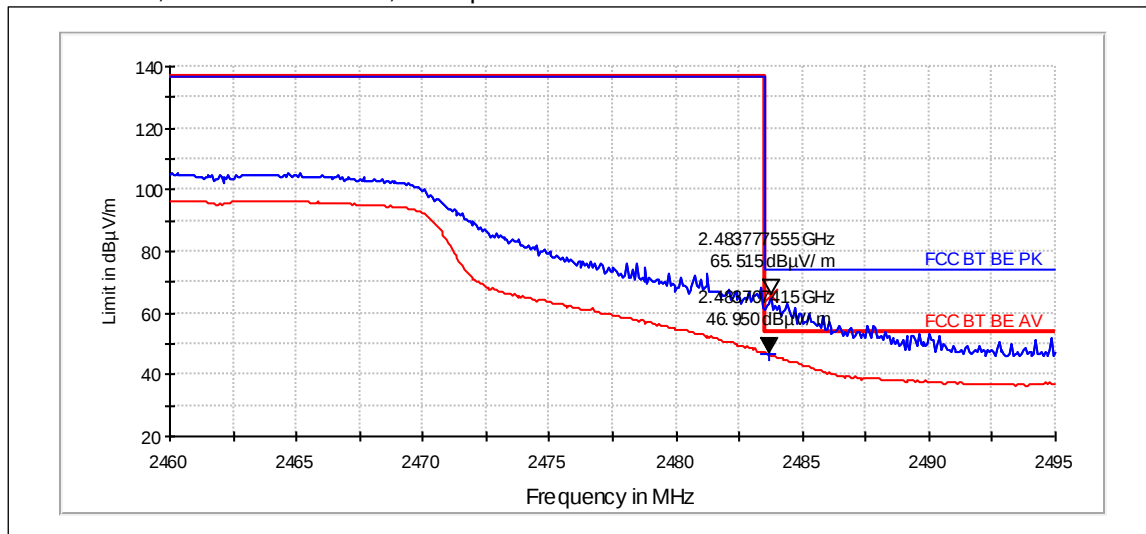

802.11n HT20 MCS0. Channel 1 / 2412 MHz

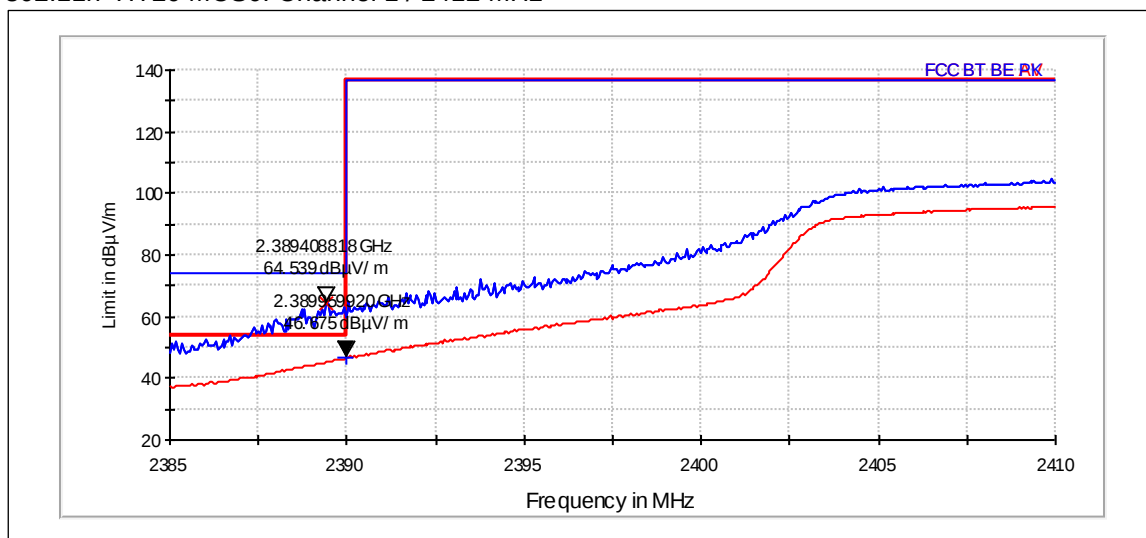


802.11n HT20 MCS0. Channel 11 / 2462 MHz

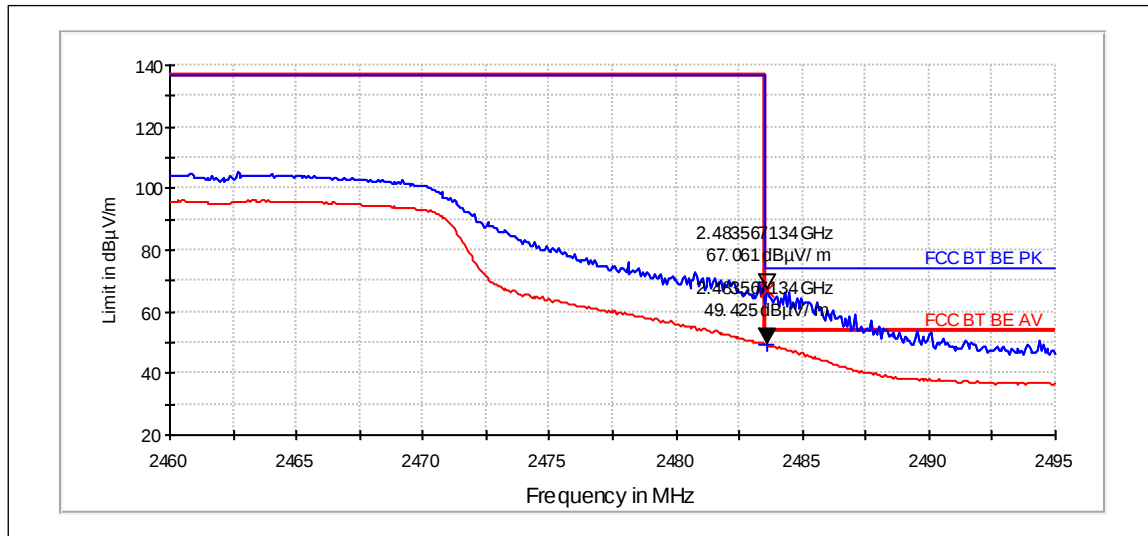

3. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5)

EUT with DUT number	RM-807, DUT 42774
Accessories with DUT numbers	BV-4D, DUT 42775 ; AC-50E, DUT 42776 ; CA-190CD, DUT 42778 ; WH-209, DUT 42777
Operation Voltage [V] / [Hz]	115 / 60
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	25 / 53 / 98.8
Date of measurements	22-Feb-2012
Measured by	Timo Raiskio

3.1.1 Test Setup

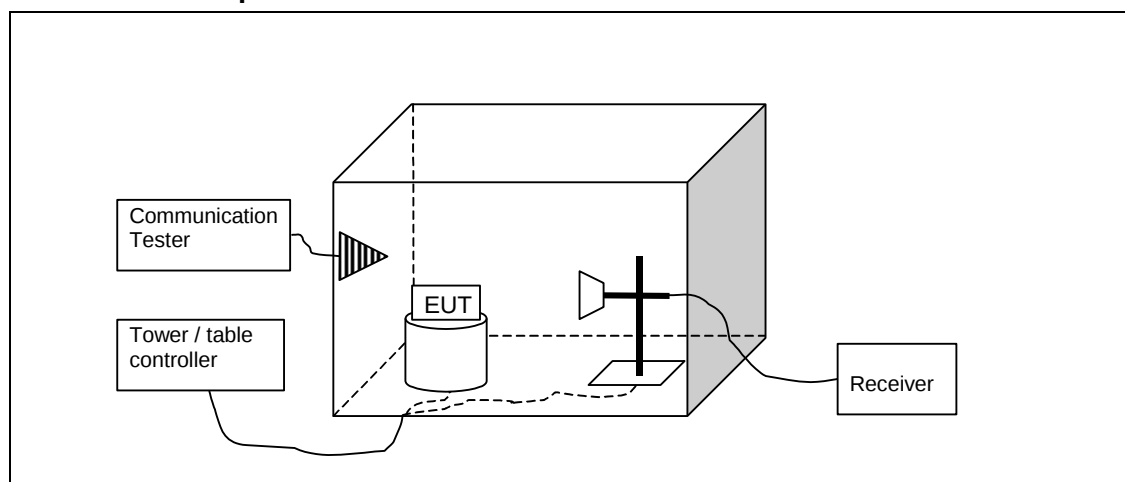

3.2. Test method and limit

The measurement is made according to DTS procedures KDB 558074 and IC standard RSS-210 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.
The measurement results are obtained as described below:

$$E [\mu V/m] = U_R X + A_{TO} T$$

Where $U_R X$ is receiver reading and $A_{TO} T$ is total correction factor including cable loss, antenna

factor and preamplifier gain ($A_{TO}T = L_{CABLE}S + A_F - G_{PREAMP}P$).

Limits for spurious radiated emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit [μ V/m]	Limit [dB μ V/m]	Detector
30 - 88	100	40	Quasi peak
88 - 216	150	43.5	Quasi peak
216 - 960	200	46	Quasi peak
960 - 1000	500	54	Quasi peak
Above 1000	500	54	Average
Above 1000	5000	74	Peak

3.3. WLAN Test results

3.3.1 DSSS, 11Mbps, QPSK

Channel 1 / 2412 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4824.5	41.23	115.173	43.5	-2.27	HORIZONTAL	PASSED
7236.1	44.4	165.92	42.72	1.68	HORIZONTAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4824.5	27.74	24.367	30.01	-2.27	HORIZONTAL	PASSED
7236.1	31.36	37	29.68	1.68	HORIZONTAL	PASSED

Channel 6 / 2437 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
30.06	25.46	18.743	46.97	-21.51	VERTICAL	PASSED
30.12	24.82	17.424	46.36	-21.54	VERTICAL	PASSED
30.54	23.6	15.132	45.3	-21.7	VERTICAL	PASSED
872.345	31.37	37.008	46.78	-15.41	HORIZONTAL	PASSED
910.942	21.61	12.038	37.2	-15.59	VERTICAL	PASSED
950.191	27.66	24.155	42.35	-14.69	HORIZONTAL	PASSED
955.942	33.97	49.957	48.61	-14.64	HORIZONTAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3898	38.8	87.136	42.06	-3.26	VERTICAL	PASSED
3903.805	39.31	92.374	42.58	-3.27	VERTICAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3898	26.31	20.682	29.57	-3.26	VERTICAL	PASSED
3903.805	26.28	20.616	29.55	-3.27	VERTICAL	PASSED

Channel 11 / 2462 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4924	43.94	157.398	46.2	-2.26	VERTICAL	PASSED
7386.7	43.6	151.374	41.57	2.03	VERTICAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4924	30.3	32.749	32.56	-2.26	VERTICAL	PASSED
7386.7	30.98	35.408	28.95	2.03	VERTICAL	PASSED

3.3.2 OFDM, 6Mbps, BPSK

Channel 1 / 2412 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4825.8	40.43	105.051	42.72	-2.29	HORIZONTAL	PASSED
7234.2	44.76	172.882	43.11	1.65	VERTICAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4825.8	27.75	24.401	30.04	-2.29	HORIZONTAL	PASSED
7234.2	31.43	37.265	29.78	1.65	VERTICAL	PASSED

Channel 6 / 2437 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
30.06	25.02	17.82	46.53	-21.51	VERTICAL	PASSED
30.18	16.54	6.712	38.1	-21.56	VERTICAL	PASSED
30.42	22.77	13.751	44.42	-21.65	VERTICAL	PASSED
872.445	31.19	36.279	47.7	-16.51	VERTICAL	PASSED
912.812	22.63	13.533	37.33	-14.7	HORIZONTAL	PASSED
950.281	25.85	19.613	40.54	-14.69	HORIZONTAL	PASSED
956.012	33.3	46.259	47.93	-14.63	HORIZONTAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3910.625	39.56	95.017	42.85	-3.29	VERTICAL	PASSED
4873.948	46.85	219.913	48.94	-2.09	HORIZONTAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3910.625	26.58	21.338	29.87	-3.29	VERTICAL	PASSED
4873.948	33.27	46.084	35.36	-2.09	HORIZONTAL	PASSED

Channel 11 / 2462 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4923.9	44.61	169.961	46.96	-2.35	HORIZONTAL	PASSED
7385.9	45.51	188.538	43.5	2.01	HORIZONTAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4923.9	31.01	35.534	33.36	-2.35	HORIZONTAL	PASSED
7385.9	32.26	41.035	30.25	2.01	HORIZONTAL	PASSED

3.3.3 802.11n, HT20, MCS0

Channel 1 / 2412 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4822.4	40.58	106.918	42.84	-2.26	HORIZONTAL	PASSED
7234.1	44.54	168.558	42.85	1.69	HORIZONTAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4822.4	27.58	23.944	29.84	-2.26	HORIZONTAL	PASSED
7234.1	31.5	37.588	29.81	1.69	HORIZONTAL	PASSED

Channel 6 / 2437 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
30.15	24.4	16.592	45.95	-21.55	VERTICAL	PASSED
30.3	16.42	6.621	38.02	-21.6	VERTICAL	PASSED
872.415	33.68	48.306	49.08	-15.4	HORIZONTAL	PASSED
907.14	21.52	11.908	37.15	-15.63	VERTICAL	PASSED
945.932	32.93	44.31	47.5	-14.57	HORIZONTAL	PASSED
950.14	33.73	48.579	48.42	-14.69	HORIZONTAL	PASSED
956.062	33.75	48.68	48.38	-14.63	HORIZONTAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3917.84	39.15	90.667	42.45	-3.3	VERTICAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3917.84	26.41	20.922	29.71	-3.3	VERTICAL	PASSED

Channel 11 / 2462 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4926	41.58	119.909	43.89	-2.31	HORIZONTAL	PASSED
7387.6	43.62	151.635	41.57	2.05	VERTICAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4926	28.75	27.368	31.06	-2.31	HORIZONTAL	PASSED
7387.6	31.13	36.004	29.08	2.05	VERTICAL	PASSED

4. Test Equipment

4.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM38112	Power supply	6632A	Agilent	22/24/27, 15C
TM38631	Signal Generator	83640L	Agilent	22/24/27, 15C, 15B
OM06312	Signal Generator	E4422B	Agilent	22/24
TM37678	Communication Tester	CMU200	R&S	15C, 15B
TM30600	Impulse limiter	ESH3-Z2	R&S	15C, 15B
TM26490	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
TM26491	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
TM37610	Spectrum Analyzer	FSU26	R&S	22/24/27, 15C
TM22806	Battery	BAT 20/E	Fiskars	15C, 15B
TM22805	UPS	PS 20/1.2	Fiskars	15C, 15B
-	Temperature and humidity logger	175-H2	Testo	15C, 15B
-	Temperature and humidity logger	175-H2	Testo	22/24/27, 15C
-	Air pressure and temperature logger	635-2	Testo	22/24/27, 15C, 15B
-	Air pressure sensor	0638-1835	Testo	22/24/27, 15C, 15B
-	Temperature test chamber	VT 4002	Vötsch	22/24
2058	Receiver	ESPC	R&S	15C, 15B
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B
2002	Communication Tester	CMU200	R&S	22/24/27, 15C
2009	LISN 50 µH	ENV216	R&S	15C, 15B
2010	LISN 50 µH	ENV216	R&S	15C, 15B
2012	Power splitter	11667B	Agilent	22/24/27, 15C
2013	Attenuator	8493C	Agilent	22/24/27, 15C
2014	Attenuator	8493C	Agilent	22/24/27, 15C
2019	Power splitter	ZN2PD-9G-S+	Mini-Circuits	15E
2020	Power splitter	ZN2PD-9G-S+	Mini-Circuits	15E
2023	Spectrum Analyzer	ESMI-RF	R&S	15B/15C
2024	Analyzer display unit	ESAI-D	R&S	15B/15C

4.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM38114	Power supply	6632A	Agilent	22/24/27, 15C, 15B
TM38631	Signal Generator	83640L	Agilent	22/24/27, 15C, 15B
TM38323	Preamplifier	PA-02 18-26 GHz	EMC Automation	22/24/27, 15C, 15B
-	Antenna	BBHA 9120 D	Schwarzbeck	22/24/27, 15C
TM26497	Antenna	3115	Emco	22/24/27, 15C, 15B
TM37773	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
TM38845	Receiver	ESIB 26	R&S	22/24/27, 15C, 15B
-	Antenna	HL562	R&S	22/24/27, 15C, 15B
-	Turntable	2188	EMCO	22/24/27, 15C, 15B
-	Turntable controller	2090	EMCO	22/24/27, 15C, 15B
-	RF system panel	TS-RSP	R&S	22/24/27, 15C, 15B
-	RF system panel	TS-RSP	R&S	22/24/27, 15C, 15B
-	Mini mast	2075-2	ETS Lindgren	22/24/27, 15C, 15B
TM38843	Mini mast	2075	Emco	22/24/27, 15C, 15B
TM38842	Antenna mast controller	2090	Emco	22/24/27, 15C, 15B
TM30643	LISN 50 µH	LISN-5-20-2	FCC	22/24/27, 15C, 15B
TM30644	LISN 50 µH	LISN-5-20-2	FCC	22/24/27, 15C, 15B
-	Temperature and humidity logger	175-H2	Testo	22/24/27, 15C, 15B
-	Air pressure and temperature logger	635-2	Testo	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
-	Air pressure sensor	0638-1835	Testo	22/24/27, 15C, 15B
TM39180	Laser distance meter	Disto Pro	Leica	22/24/27, 15C, 15B
TM37523	Preamplifier	AMF-4D-10M-3G-25-20P	Miteq	22/24/27, 15C, 15B
TM37498	Preamplifier	AMF-5D-020180-26-10P	Miteq	22/24/27, 15C, 15B
TM30599	Semi anechoic chambre	UNKNOWN	TDK	22/24/27, 15C, 15B
TM22638	Power supply	OL63743-901	-	22/24/27, 15C, 15B
TM38066	High pass filter	4HC3000/18000-3-KK	Trilithic	22/24/27, 15C, 15B
-	High pass filter	WHKX 1.6/15G-12SS	Wainwright	22/24/27, 15C, 15B
TM37545	Tunable notch filter	800.0/960.0-0.2/40-8SSK	Wainwright	22
TM26512	Tunable notch filter	WRCD1850/1910-0.2/40-10SSK	Wainwright	24
-	Band reject filter	WRCG1877/1883-1870/1890-40/6EE	Wainwright	24
-	Band reject filter	WRCG1729.4/1735.4-1722.4/1742.4-40/6SS	Wainwright	27
-	Band reject filter	WRCG832/838-825/848-40/5SS	Wainwright	22
TM23892	Controller	G-1000SDX	Yaesu	22/24/27
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B
6023	Antenna	VUBA 9117	Schwarzbeck	22/24/27, 15C