

## Electromagnetic Emission

### FCC MEASUREMENT REPORT

#### CERTIFICATION OF COMPLIANCE

#### FCC Part 15 Certification Measurement

PRODUCT : HDuDTA  
MODEL/Serial No. : DMS2344UHDW / ENY424W00091  
MULTIPLE MODEL : WX10HD  
FCC ID : PFNDMS2344UHDW  
APPLICANT : Digital Multimedia Technology Co., Ltd.  
2nd Fl., 926 Gwanyang-Dong, Dongan-Gu, Anyang-Si,  
Gyeonggi-Do, 431-060 Korea  
Attn.: Kee-Chul Lee / General Manager  
MANUFACTURER : Hengdi Digital Technology (Shen Zhen) Co., Ltd.  
A.B Building, Xin Shi Qiao Guanjie Industrial Park, Guihua Community,  
Guanlan Street, Bao'an District, Shenzhen City, Guangdong Province,  
People's Republic of China  
FCC CLASSIFICATION : DTS (Part 15 Digital Transmission System)  
TYPE OF MODULATION : DSSS  
FREQUENCY CHANNEL : Zigbee: 2 425 MHz, 2 450 MHz, 2475 MHz (3 Ch)  
ANTENNA TYPE : Internal Antenna (Integral)  
ANTENNA GAIN : -2.30 dBi max  
RF POWER : 0.187 mW  
RULE PART(S) : FCC Part 15 Subpart C  
FCC PROCEDURE : ANSI C63.4-2009  
TEST REPORT No. : ETLE140811.1169  
DATES OF TEST : August 12, 2014 to August 21, 2014  
REPORT ISSUE DATE : September 03, 2014  
TEST LABORATORY : ETL Inc. (FCC Designation Number : KR0022)

The HDuDTA, Model DMS2344UHDW has been tested in accordance with the measurement procedures specified in ANSI C63.4-2009 at the ETL Test Laboratory and has been shown to be complied with the electromagnetic radiated emission limits specified in FCC Rule Part15 Subpart C section 15.247.

I attest to the accuracy of data. All measurement herein was performed by me or was made under my supervision and is correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Prepared by:

Jeong Hwan, Pyo (Test Engineer)

September 03, 2014

Reviewed by:

Kug Kyoung, Yoon (Chief Engineer)

September 03, 2014

**ETL Inc.**  
114, Gasan digital 2-ro, Geumcheon-gu, Seoul, 153-803, Korea  
Tel: 82-2-858-0786 Fax: 82-2-858-0788

*The test report merely corresponds to the test sample(s).*

*This report shall not be reproduced, in whole or in part without the written approval of ETL Inc.*

## Table of Contents

### **FCC Measurement Report**

- 1. Introduction**
- 2. Product Information**
- 3. Description of Tests**
- 4. Test Condition**
- 5. Test Results**
  - 5.1 Summary of Test Results**
  - 5.2 6 dB Bandwidth**
  - 5.3 Maximum Peak Output Power**
  - 5.4 Bandwidth of Frequency Band Edges**
  - 5.5 Power Spectral Density**
  - 5.6 Spurious Emissions**
  - 5.7 Conducted Emissions Test**
  - 5.8 Radio Frequency Exposure**
- 6. Sample Calculation**
- 7. List of test Equipment used for Measurement**

- Appendix A. FCC ID Label and Location**
- Appendix B. Test Setup Photographs**
- Appendix C. External Photographs**
- Appendix D. Internal Photographs**
- Appendix E. Block Diagram**
- Appendix F. Circuit Diagram**
- Appendix G. User Manual**
- Appendix H. Operational Description**
- Appendix I. Antenna Requirement**
- Appendix J. Radio Frequency Exposure**

## FCC MEASUREMENT REPORT

**Scope** – *Measurement and determination of electromagnetic emission (EME) of radio frequency devices including intentional radiators and/or unintentional radiators for compliance with the technical rules and regulations of the U.S Federal Communications Commission(FCC)*

### General Information

<b>Applicant Name</b>	: Digital Multimedia Technology Co., Ltd.
<b>Address</b>	: 2nd Fl., 926 Gwanyang-Dong, Dongan-Gu, Anyang-Si, Gyeonggi-Do, 431-060 Korea
<b>Attention</b>	: Kee-Chul Lee / General Manager

- **EUT Type** : HDuDTA
- **Model Number** : DMS2344UHDW
- **S/N** : ENY424W00091
- **Modulation Technique** : DSSS
- **Frequency Channel** : Zigbee: 2 425 MHz, 2 450 MHz, 2475 MHz (3 Ch)
- **Antenna Type** : Internal Antenna (Integral)
- **Antenna Gain** : -2.30 dBi max
- **RF Power** : 0.187 mW
- **Environmental of Tests** : Temperature: (25.3 ± 5.4) °C  
Humidity: (57 ± 12) % R.H.  
Atmospheric Pressure: (100.5 ± 0.4) kPa
- **FCC Rule Part(s)** : FCC Part 15 Subpart C
- **Test Procedure** : ANSI C63.4-2009
- **FCC Classification** : DTS (Part 15 Digital Transmission System)
- **Place of Tests** : ETL Inc. Testing Lab. (FCC Designation Number : KR0022)

Radiated Emission test 1;  
97-4, Gureomae-gil, Seosin-myeon, Hwaseong-si,  
Gyeonggi-do, 445-882, Korea

Radiated Emission test 2 and Conducted Emission test;  
114, Gasan digital 2-ro, Geumcheon-gu, Seoul, 153-803, Korea

## 1. INTRODUCTION

The measurement test for radiated and conducted emission test was conducted at the ETL Inc. The site is constructed in conformance with the requirements of the ANSI C63.4-2009 and CISPR Publication 16. The ETL has site descriptions on file with the FCC for 3 m and 10 m site configurations. Detailed description of test facility was found to be in compliance with FCC Rules according to the ANSI C63.4-2009 and registered to the Federal Communications Commission (FCC Designation Number : KR0022).

The measurement procedure described in American National Standard for Method of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-2009) was used in determining radiated and conducted emissions from the Digital Multimedia Technology Co., Ltd. Model: DMS2344UHDW

## 2. PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the HDuDTA (model: DMS2344UHDW).

The model DMS2344UHDW is basic model that was tested.

The multi model WX10HD is identical to basic model, except for model designation.

### 2.2 General Specification

Favorite channel, Parental Lock
Automatic search for newly added transponder (Network Auto Search)
Stores up to 5 000 channels
Plug-and-play data transfer system (DSR to DSR)
Timer function, automatically turns On/Off by setting function (daily, weekly, monthly and one time)
Automatic reserved channel moving system
Provide Electronic program Guide (EPG)
PAL/NTSC automatically conversion
Last channel automatically saving
Support RF4CE application
RF4CE Frequency range: 2 425 MHz ~ 2 475 MHz
Support for various video output: HDMI, RF 3/4 Mod.
HDMI 1.3a with HDCP 1.1
US3/4 Channel
MPEG-2 / MPEG-4 Part 10 / H.264
Video Display format with NTSC/480p/576p/720p/1 080i
Dolby Digital AC3
RF input frequency range: 105 MHz to 1 002 MHz
High Internal Frequency: X-tal → 54 MHz

### **3. DESCRIPTION OF TESTS**

The tests documented in this report were performed in accordance with ANSI C63.4-2009 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.247.

#### **3.1 Radiated Emission Measurement**

Radiated emission measurements were made in accordance with § 13 in ANSI C63.4-2009 "Measurement of Intentional radiators" The measurements were performed over the frequency range of 30 MHz to 40 GHz using antenna as the input transducer to a Spectrum analyzer or a Field Intensity Meter. The measurements were made with the detector set for "Peak, Quasi-peak, Average" within a bandwidth of 120 kHz and above 1 GHz is 1 MHz.

Preliminary measurements were made at 3 m using broadband antennas, and spectrum analyzer to determine the frequency producing the maximum emission in shielded room. Appropriate precaution was taken to ensure that all emission from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth and height with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30 MHz to 1 000 MHz using Log-Bicon antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used. Final measurements were made open site or SVSWR chamber at 3 m. The test equipment was placed on a styrofoam table. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined by manual. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8 m high nonmetallic 1.0 m x 1.5 m table. The EUT, support equipment, and interconnecting cables were rearranged and manipulated to maximize each emission. The turntable containing the system was rotated; the antenna height was varied 1 m to 4 m and stopped at the azimuth or height producing the maximum emission.

Varying the mode of operating frequencies of the EUT maximized each emission. The system was tested in all the three orthogonal planes and changing the polarity of the antenna. The worst-case emissions are recorded in the data tables. If necessary, the radiated emission measurement could be performed at a closer distance to ensure higher accuracy and the results were extrapolated to the specified distance using an inverse linear distance extrapolation factor (20 dB/decade) as per section 15.31(f).

Photographs of the worst-case emission can be seen in Photographs of the worst-case emission test setup can be seen in Appendix B.

## 3.2 Conducted Emission Measurement

Conducted emissions measurements were made in accordance with section § 13 in ANSI C63.4-2009 "measurement of intentional radiators". The measurements were performed over the frequency range of 0.15 MHz to 30 MHz using a  $50\ \Omega/50\ \mu\text{H}$  LISN as the input transducer to a Spectrum Analyzer or a Test Receiver. The measurements were made with the detector set for "Peak" amplitude within a bandwidth of 9 kHz or for "quasi-peak" within a bandwidth of 9 kHz.

The line-conducted emission test is conducted inside a shielded anechoic chamber room with 1 m x 1.5 m x 0.8 m wooden table which is placed 0.4 m away from the vertical wall and 1.5 m away from the side wall of the chamber room. Two LISN are bonded to the shielded room. The EUT is powered from the LISN and the support equipment is powered from the other LISN. Power to the LISNs are filtered by a noise cut power line filters. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and these supply lines will be connected to the LISN. Non-inductive bundling to a 1 m length shortened all interconnecting cables more than 1 m. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the EMI Test Receiver to determine the frequency producing the maximum emission from the EUT. The frequency producing the maximum level was reexamined using to set Quasi-Peak mode by manual, after scanned by automatic Peak mode from 0.15 MHz to 30 MHz. The bandwidth of the spectrum analyzer was set to 9 kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission.

Photographs of the worst-case emission can be seen in Photographs of the worst-case emission test setup can be seen in Appendix B.

## 3.3 FCC Part 15.205 Restricted Bands of Operations

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.694 75 - 16.695 25	608 - 614	5.35 - 5.46
2.173 5 - 2.190 5	16.804 25 - 16.804 75	960 - 1 240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1 300 - 1 427	8.025 - 8.5
4.177 25 - 4.177 75	37.5 - 38.25	1 435 - 1 626.5	9.0 - 9.2
4.207 25 - 4.207 75	73 - 74.6	1 645.5 - 1 646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1 660 - 1 710	10.6 - 12.7
6.267 75 - 6.268 25	108 - 121.94	1 718.8 - 1 722.2	13.25 - 13.4
6.311 75 - 6.312 25	123 - 138	2 200 - 2 300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2 310 - 2 390	15.35 - 16.2
8.362 - 8.366	156.524 75 - 156.525 25	2 483.5 - 2 500	17.7 - 21.4
8.376 25 - 8.386 75	156.7 - 156.9	2 690 - 2 900	22.01 - 23.12
8.414 25 - 8.414 75	162.012 5 - 167.17	3 260 - 3 267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3 332 - 3 339	31.2 - 31.8
12.519 75 - 12.520 25	240 - 285	3 345.8 - 3 358	36.43 - 36.5
12.576 75 - 12.577 25	322 - 335.4	3 600 - 4 400	( <sup>2</sup> )
13.36 - 13.41			

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490 MHz - 0.510 MHz.

<sup>2</sup> Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1 000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1 000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

## 4. TEST CONDITION


### 4.1 Test Configuration

The device was configured for testing in a typical fashion (as a customer would normally use it). During the tests, the following conditions and configurations were used.

### 4.2 Description of Test modes

HDuDTA that has the control software.

### 4.3 The setup drawing(s)

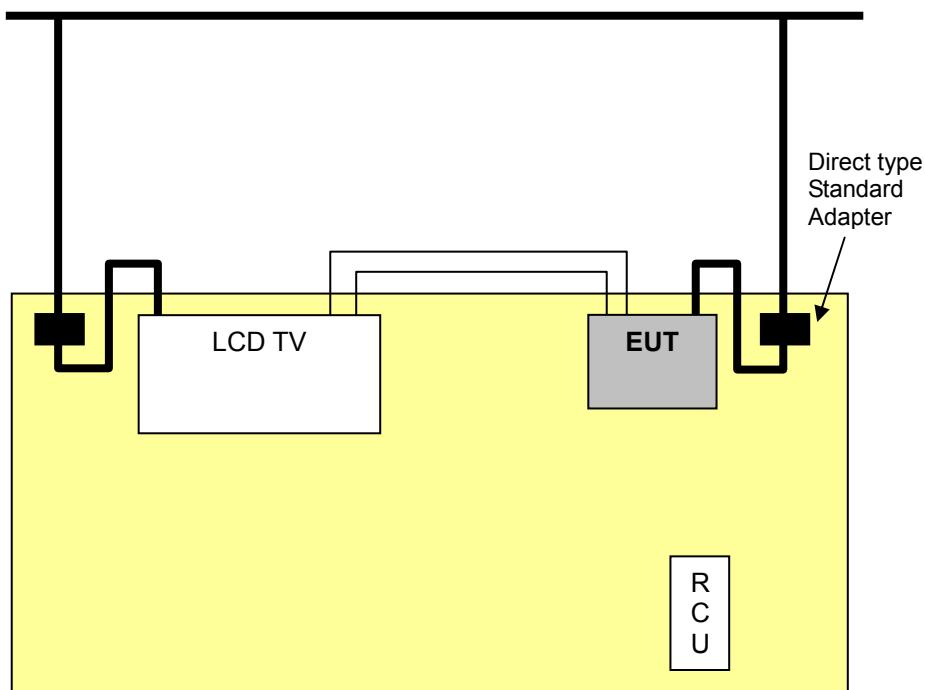

— : Signal line

— : Power line



: Adapter

## 5. TEST RESULTS

### 5.1 Summary of Test Results

The measurement results were obtained with the EUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum emission of the EUT are reported.

47 CFR Part 15, Subpart C	Measurement Required	Result
15.247(a)(2)	6 dB Bandwidth	Pass
15.247(b)(3)	Maximum Peak Output Power	Pass
15.247(d)	Bandwidth of Frequency Band Edges	Pass
15.247(e)	Power Spectral Density	Pass
15.209(a)	Spurious Emissions	Pass
15.207	Conducted Emissions	Pass
1.1307(b)(1)	RF Exposure	Pass

The data collected shows that the **Digital Multimedia Technology Co., Ltd. / HDuDTA / DMS2344UHDW** complied with technical requirements of above rules part 15.207, 209 and 15.247 Limits.

The equipment is not modified anything, mechanical or circuits to improve EMI status during a measurement. No EMI suppression device(s) was added and/or modified during testing.

## 5.2 6 dB Bandwidth

EUT	HDuDTA / DMS2344UHDW
Limit apply to	FCC Part 15.247(a)(2)
Test Date	August 12, 2014
Environmental of Test	(21.5 ± 0.2) °C, (46 ± 0) % R.H., (100.4 ± 0.0) kPa
Operating Condition	RF transmitting continuously during the tested.
Result	Passed

### Limit

The maximum 6 dB bandwidth shall be at least 500 kHz.

### Test Data


Frequency [MHz]	6 dB Bandwidth [MHz]	Limit
2 425	1.617	> 500 kHz
2 450	1.600	
2 475	1.842	

### NOTES:


1. Measure frequency separation of relevant channel using spectrum analyzer.
2. RBW 300 kHz, VBW 1 MHz, Sweep time Auto.
3. Please see the measured plot in next page.

## Plots of 6 dB Bandwidth


[2 425 MHz]

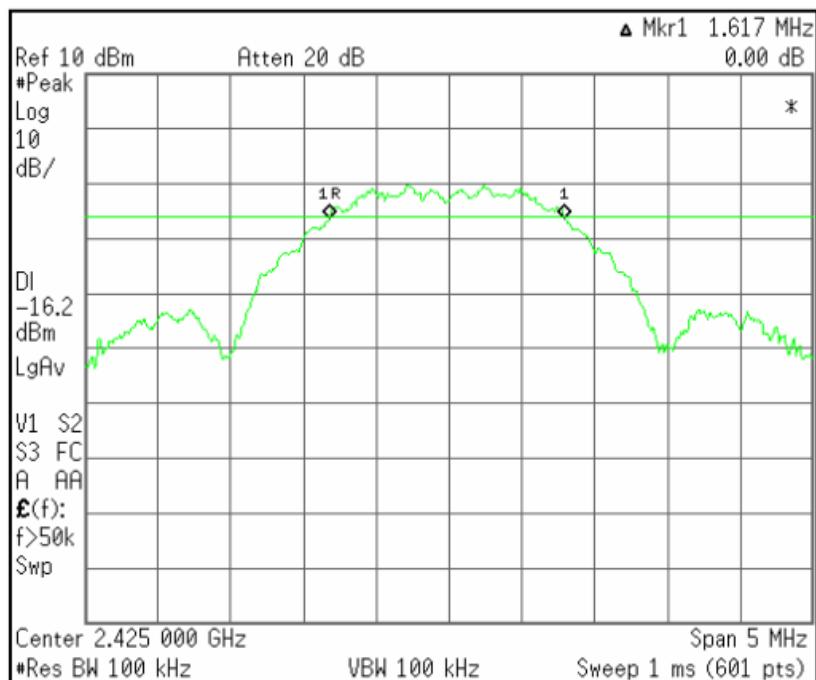

[2 450 MHz]

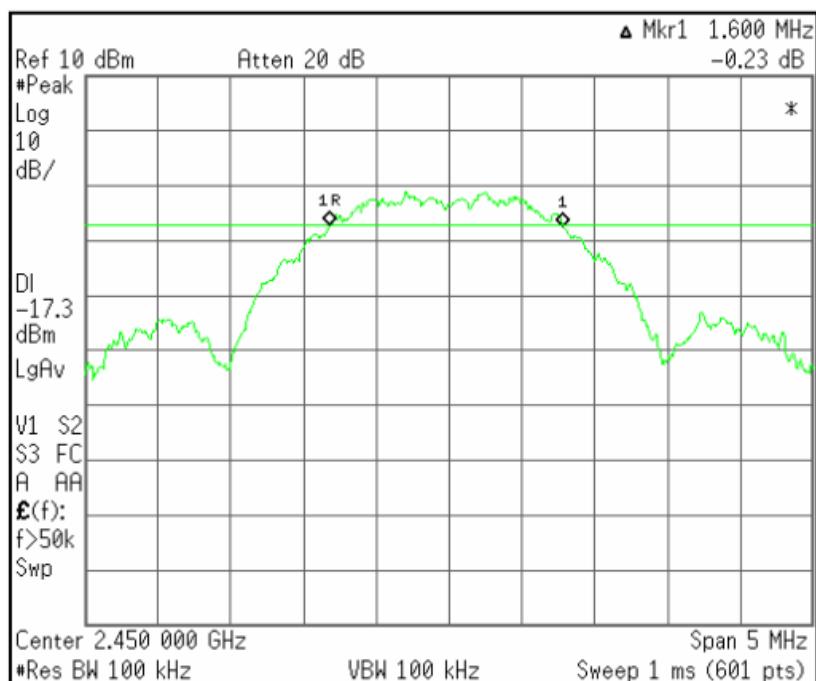

[2 475 MHz]

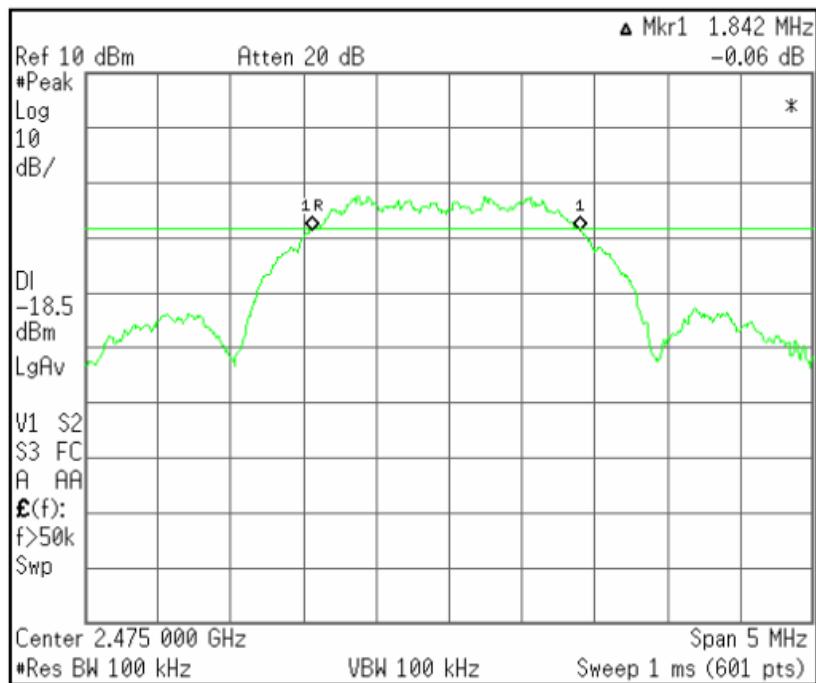

## 5.3 Maximum Peak Conducted Output Power

EUT	HDuDTA / DMS2344UHDW
Limit apply to	FCC Part 15.247(b)(3)
Test Date	August 12, 2014
Environmental of Test	(21.2 ± 0.1) °C, (47 ± 1) % R.H., (100.4 ± 0.0) kPa
Operating Condition	RF transmitting continuously during the tested.
Result	Passed

### Limit

The maximum peak conducted output power of the intentional radiator shall not exceed the following:

For frequency hopping systems operating in the 2 400.0 MHz - 2 483.5 MHz band: 1 Watt

### Test Data


Frequency [MHz]	Output Power [dBm]	Limit
2 425	-7.28	< 30.00 dBm (1 W)
2 450	-8.04	
2 475	-8.89	

### NOTES:


1. Measure conducted Channel power of relevant channel using spectrum analyzer.
2. RBW 1 MHz, VBW 8 MHz
3. Please see the measured plot in next page.

## Plots of Maximum Peak Output Power Bandwidth


[2 425 MHz]

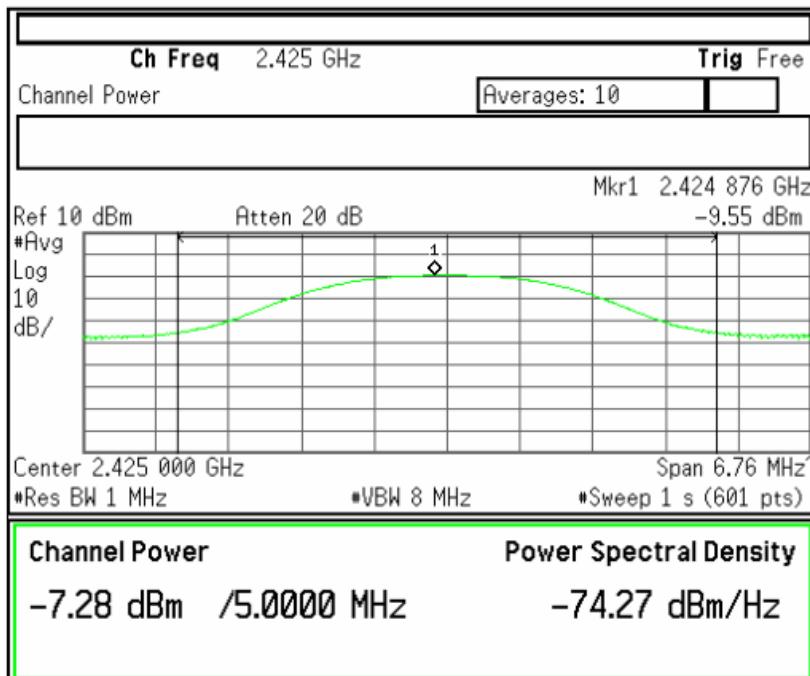

[2 450 MHz]

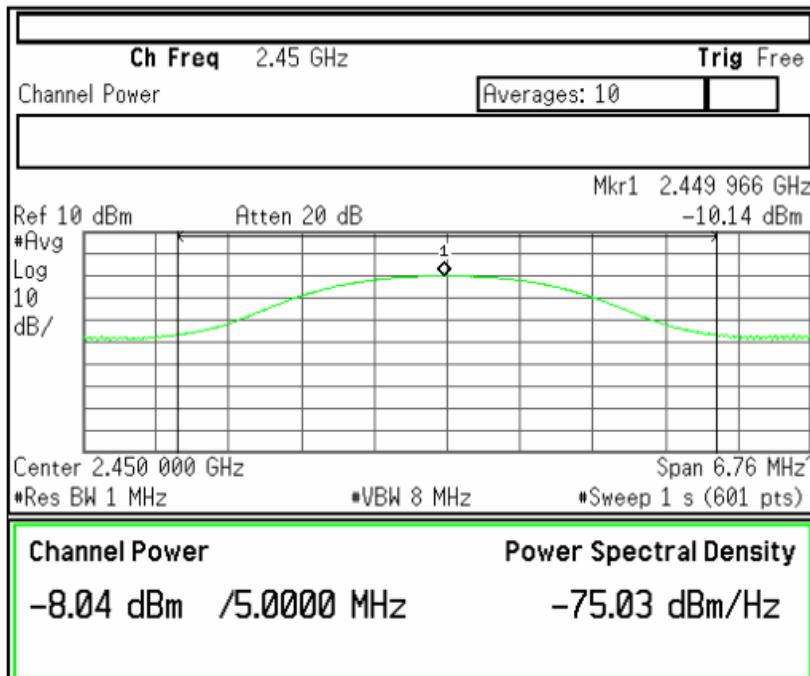

[2 475 MHz]

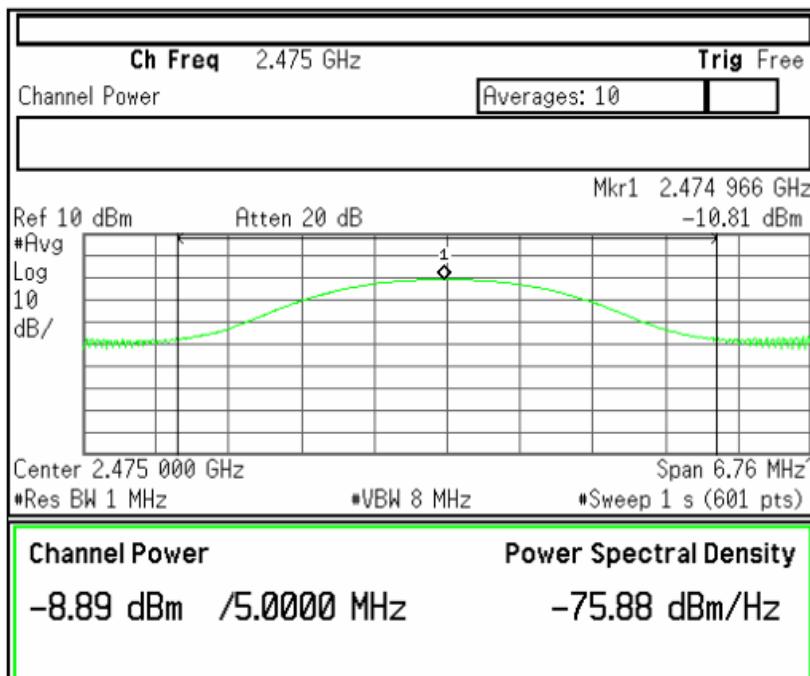

## 5.4 Bandwidth of Frequency Band Edges

EUT	HDuDTA / DMS2344UHDW
Limit apply to	FCC Part 15.247(d)
Test Date	August 13, 2014
Environmental of Test	(22.8 ± 1.0) °C, (49 ± 0) % R.H., (100.1 ± 0.0) kPa
Operating Condition	RF transmitting continuously during the tested.
Result	Passed

### Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

### Test Results



- Refer to see the measured plot in next page.

### NOTES:

1. The test was performed to make a direct field strength measurement at the band edge frequencies.

## Plots of Bandwidth of Frequency Band Edges


Conducted

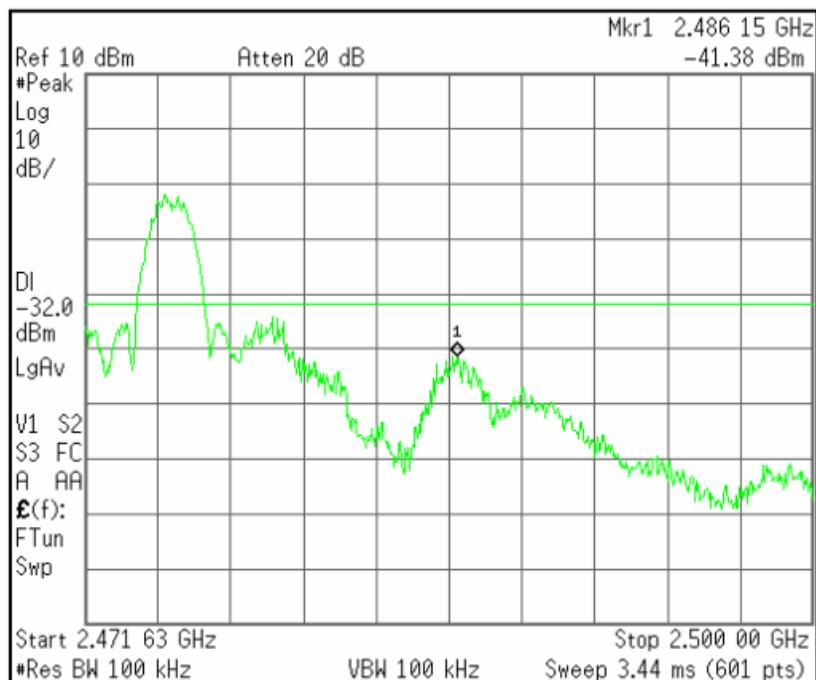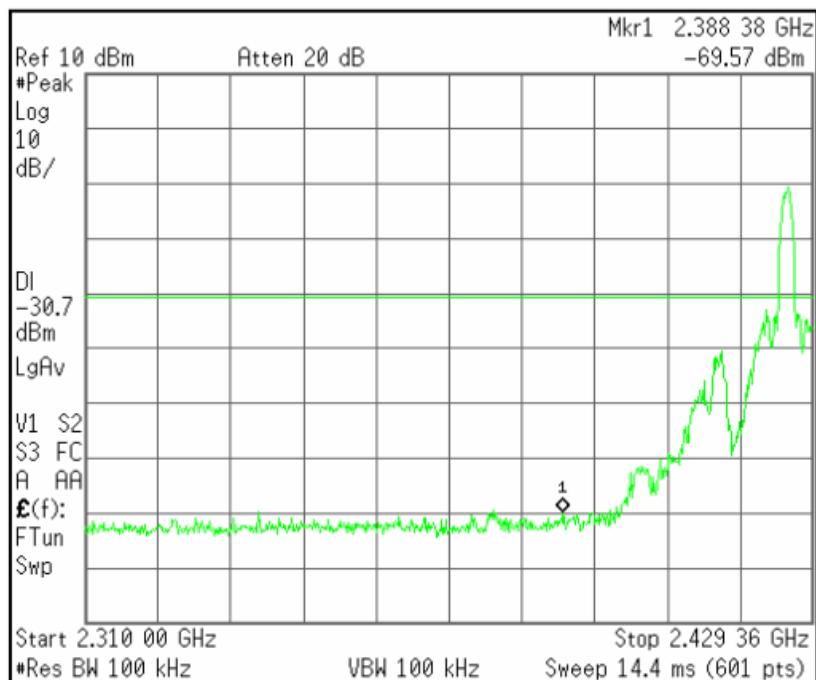

## Radiated


Peak Detector: RBW: 1 MHz, VBW: 1 MHz (2 310 MHz - 2 390 MHz), Worst case (Low, Horizontal)

 Peak Limit Line  
 AV Limit Line

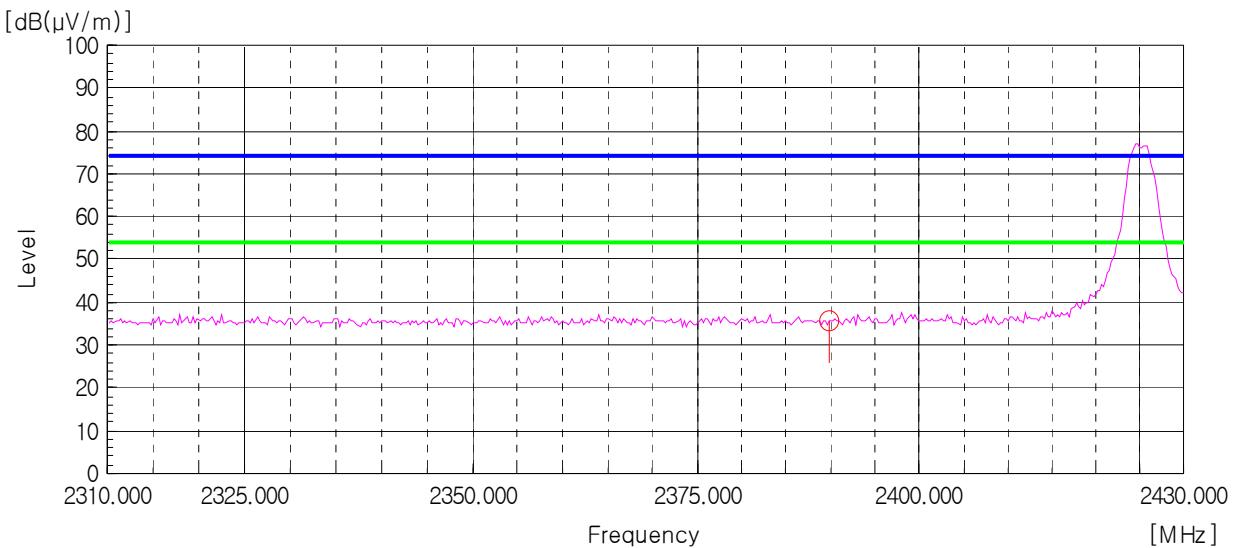


AV Detector: RBW: 1 MHz, VBW: 10 Hz (2 310 MHz - 2 390 MHz), Worst case (Low, Horizontal)

 Peak Limit Line  
 AV Limit Line

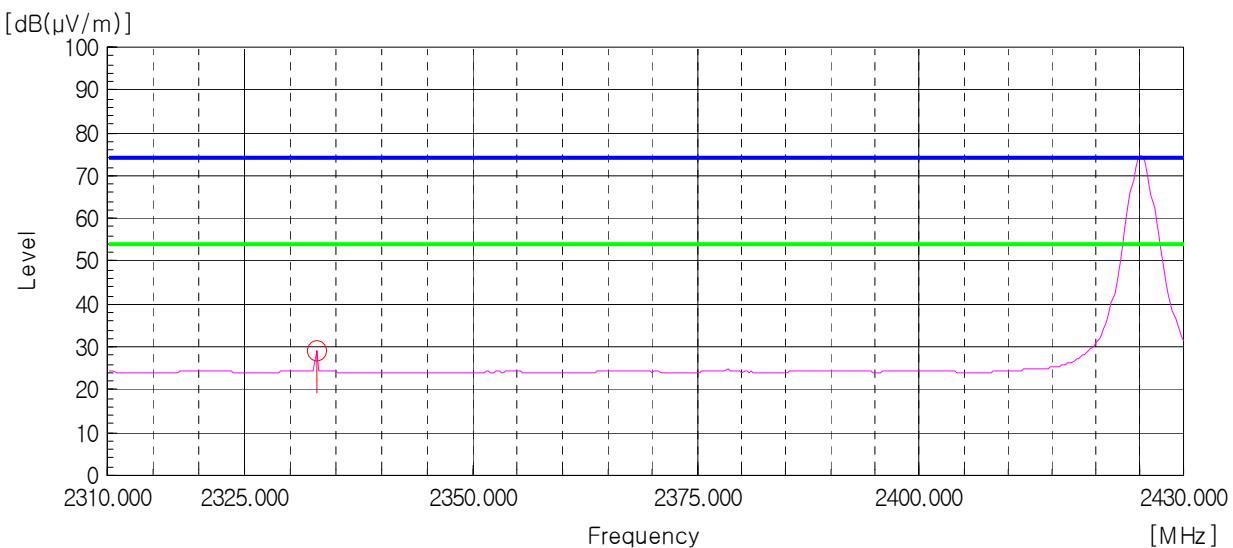


Peak Detector: RBW: 1 MHz, VBW: 1 MHz (2 483.5 MHz - 2 500 MHz), Worst case (High, Horizontal)

 Peak Limit Line  
 AV Limit Line

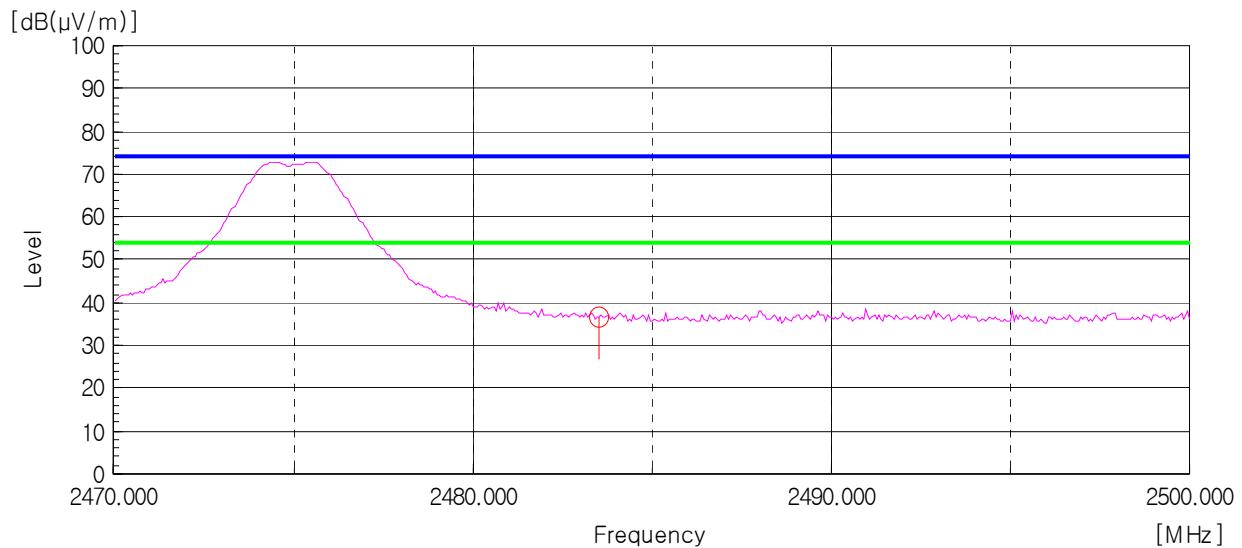

AV Detector: RBW: 1 MHz, VBW: 10 Hz (2 483.5 MHz - 2 500 MHz), Worst case (High, Horizontal)

 Peak Limit Line  
 AV Limit Line

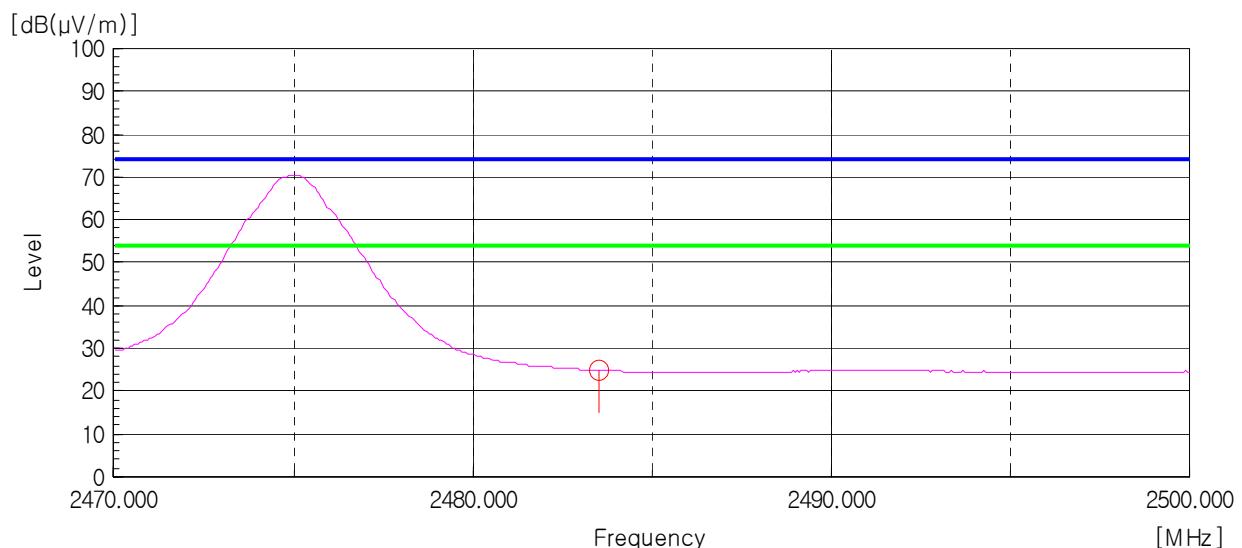

## 5.5 Power Spectral Density

EUT	HDuDTA / DMS2344UHDW
Limit apply to	FCC Part 15.247(e)
Test Date	August 12, 2014
Environmental of Test	(22.3 ± 0.0) °C, (45 ± 0) % R.H., (100.4 ± 0.0) kPa
Operating Condition	RF transmitting continuously during the tested.
Result	Passed

### Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### Test Data


Frequency [MHz]	PSD [dBm]	Limit
2 425	-10.59	8.00 dBm
2 450	-12.02	
2 475	-12.67	

### NOTES:


1. Measure power spectral density of relevant channel using spectrum analyzer.
2. RBW 100 kHz, VBW 300 kHz, span 1 MHz, Sweep time (= span / 3 kHz).
3. Please see the measured plot in next page.

## Plots of Power Spectral Density


[2 425 MHz]

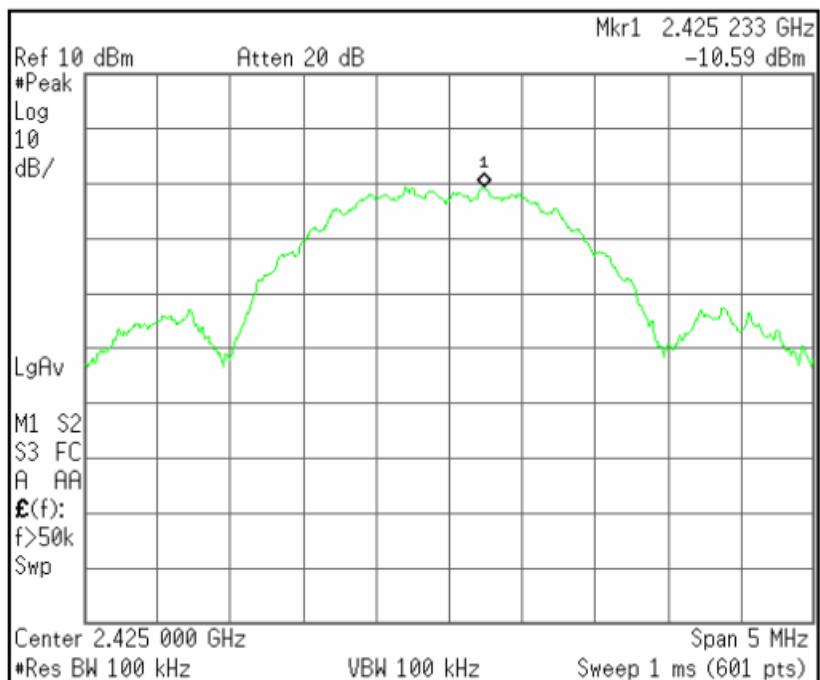

[2 450 MHz]

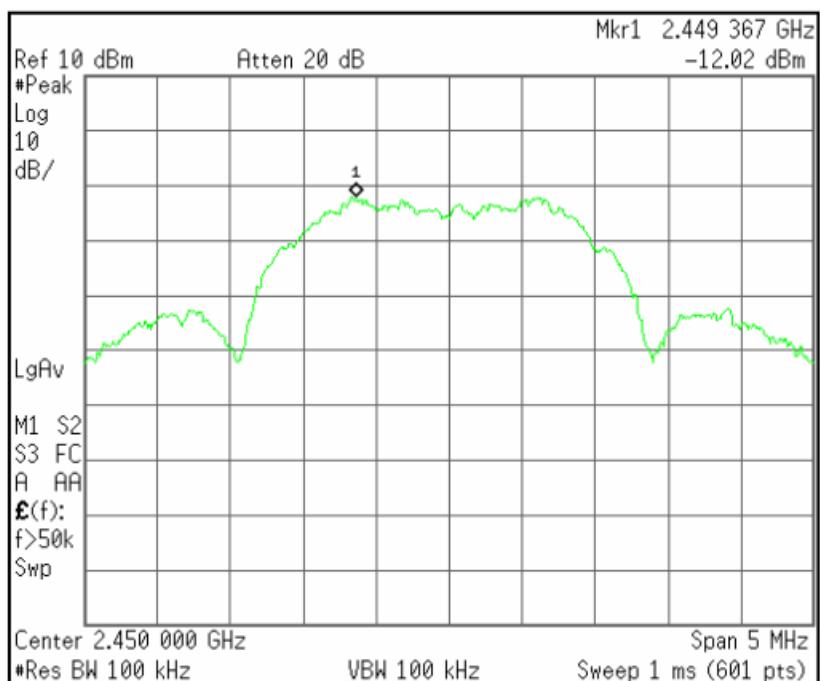

[2 475 MHz]

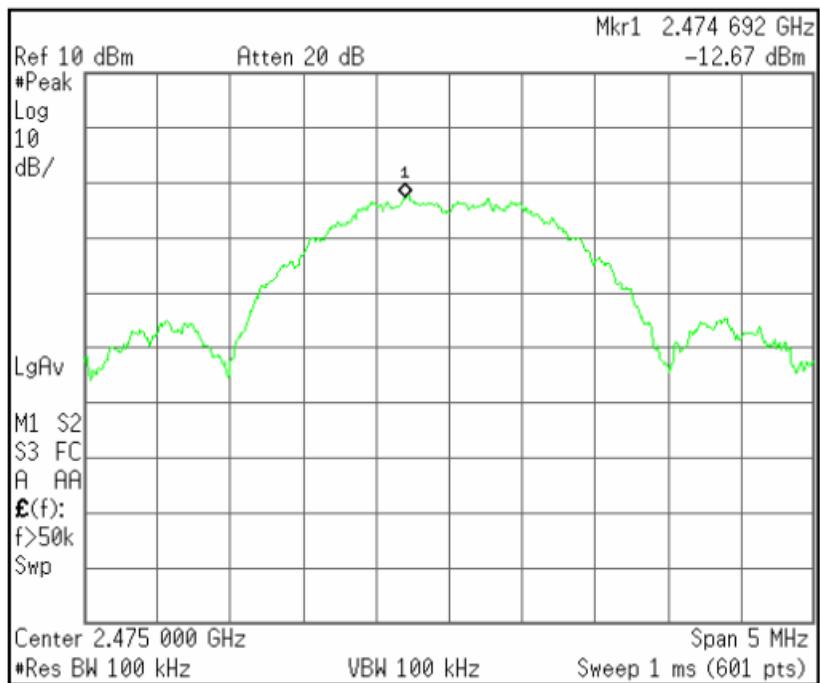

## 5.6 Spurious Emissions

EUT	HDuDTA / DMS2344UHDW
Limit apply to	FCC Part 15.209
Test Date	August 20, 2014 to August 21, 2014
Environmental of Test	(25.7 ± 4.9) °C, (59 ± 10) % R.H., (100.6 ± 0.3) kPa
Operating Condition	Low CH, Middle CH, High CH Transmission
Result	Passed

### Limit

Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequencies [MHz]	Field Strength [µV/m]	Measurement Distance [m]
0.009 - 0.490	2 400/F(kHz)	300
0.490 - 1.705	24 000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 MHz - 72 MHz, 76 MHz - 88 MHz, 174 MHz - 216 MHz or 470 MHz - 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

### Test Results

- Refer to see the measured plot in next page.

## Radiated Emissions Test data

### - 9 kHz to 30 MHz

Test Date	August 20, 2014
Environmental of Test	(29.4 ± 1.2) °C, (65 ± 3) % R.H., (100.8 ± 0.1) kPa

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical. Detector mode: CISPR Quasi-Peak mode (100 Hz, 9 kHz)

Frequency [MHz]	Reading [dB(µV)]	Polarization (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB]	Result [dB(µV/m)]	Limit [dB(µV/m)]	Margin [dB]
<b>Emission attenuated more than 20 dB below the limit are not reported.</b>							

**Result: All emissions below noise floor of 20 dB(µV/m).**

### NOTES:

1. \* H : Horizontal polarization , \*\* V : Vertical polarization
2. Result = Reading + Antenna factor + Cable loss
3. Margin = Limit - Result
4. The measurement was performed for the frequency range 9 kHz to 30 MHz according to FCC Part 15.209.

## - Below 1 GHz (30 MHz to 1 GHz)

Test Date	August 20, 2014
Environmental of Test	(28.5 ± 0.5) °C, (62 ± 2) % R.H., (100.8 ± 0.1) kPa


The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical. Detector mode: CISPR Quasi-Peak mode (6 dB Bandwidth: 120 kHz)

Frequency [MHz]	Reading [dB(µV)]	Polarization (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB(µV)]	Height [cm]	Result [dB(µV/m)]	Limit [dB(µV/m)]	Margin [dB]
34.89	11.52	V	11.01	0.97	100	23.50	40.00	16.50
132.87	15.72	V	11.85	1.53	110	29.10	43.50	14.40
159.81	10.84	V	12.42	1.64	115	24.90	43.50	18.60
169.60	12.08	V	11.83	1.69	120	25.60	43.50	17.90
196.55	15.31	H	9.56	1.73	375	26.60	43.50	16.90
228.39	18.96	H	10.42	1.82	355	31.20	46.00	14.80
245.53	20.38	H	11.14	1.88	310	33.40	46.00	12.60

### NOTES:

1. \* H : Horizontal polarization , \*\* V : Vertical polarization
2. Result = Reading + Antenna factor + Cable loss
3. Margin value = Limit - Result
4. The measurement was performed for the frequency range above 30 MHz according to FCC Part 15.209.

— : Limit

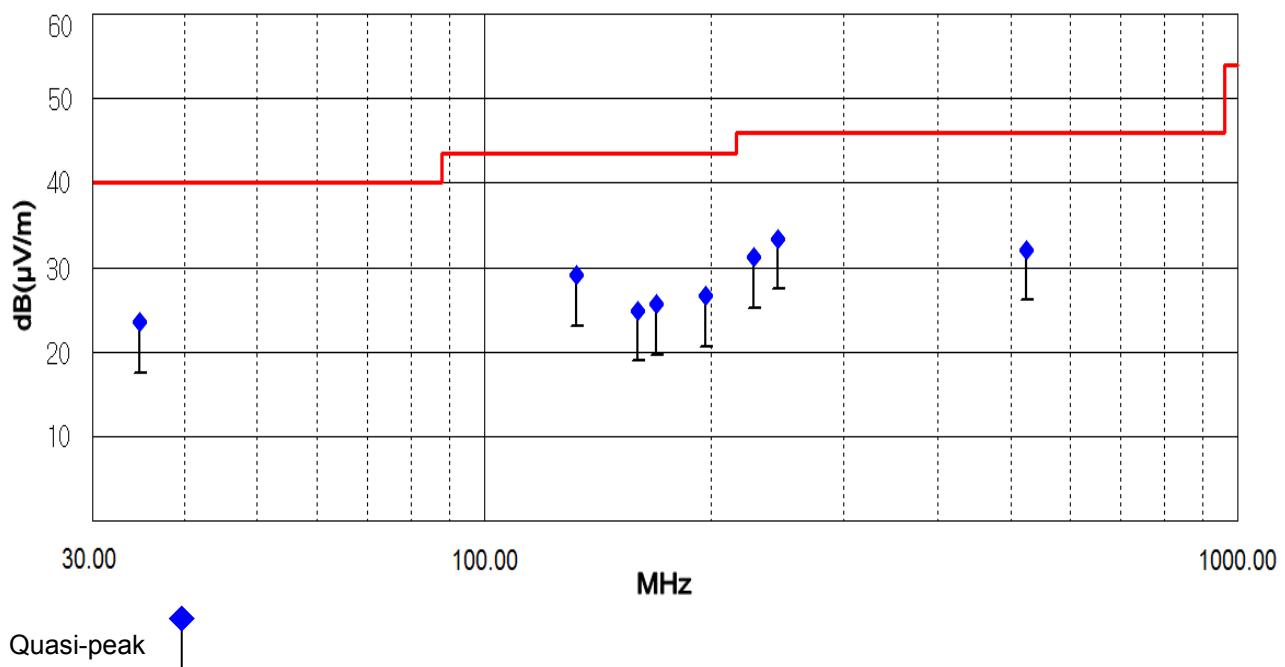

## - Above 1 GHz (1 GHz to 25 GHz)

Test Date	August 21, 2014									
Environmental of Test	(22.6 ± 0.1) °C, (49 ± 0) % R.H., (100.3 ± 0.0) kPa									

### 1. Low CH (2 425 MHz)

Frequency [MHz]	Reading [dB(µV)]		Polarity (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB]	Result [dB(µV/m)]		Limit [dB(µV/m)]		Margin [dB]	
	Peak	Average				Peak	Average	Peak	Average	Peak	Average
4 851.24	60.98	51.88	V	31.97	-34.65	58.30	49.20	73.97	53.97	15.67	4.77

### 2. Middle CH (2 450 MHz)

Frequency [MHz]	Reading [dB(µV)]		Polarity (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB]	Result [dB(µV/m)]		Limit [dB(µV/m)]		Margin [dB]	
	Peak	Average				Peak	Average	Peak	Average	Peak	Average
4 901.15	61.61	53.01	V	32.15	-34.66	59.10	50.50	73.97	53.97	14.87	3.47

### 3. High CH (2 475 MHz)

Frequency [MHz]	Reading [dB(µV)]		Polarity (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB]	Result [dB(µV/m)]		Limit [dB(µV/m)]		Margin [dB]	
	Peak	Average				Peak	Average	Peak	Average	Peak	Average
4 951.32	60.74	51.84	V	32.33	-34.67	58.40	49.50	73.97	53.97	15.57	4.47

**Result: No signal detect above second harmonic.**



#### NOTES:

1. \* H : Horizontal polarization , \*\* V : Vertical polarization
2. Factor = Antenna factor + Cable loss + Preamp
3. Result = Reading + Factor
4. Margin = Limit - Result
5. Measuring frequencies from 1GHz to the 10<sup>th</sup> harmonic of highest fundamental frequency.
6. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded(ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
7. Spectrum setting:
  - a. Peak Setting 1 GHz to 10<sup>th</sup> harmonics of fundamental, RBW = 1 MHz, VBW = 1 MHz, Sweep = Auto
  - b. AV Setting 1 GHz to 10<sup>th</sup> harmonics of fundamental, RBW = 1 MHz, VBW = 10 Hz, Sweep = Auto



## Plots of Spurious Emissions (Conducted Measurement)

Test Date	August 21, 2014
Environmental of Test	(21.5 ± 0.7) °C, (50 ± 1) % R.H., (100.3 ± 0.0) kPa



[CH Low]

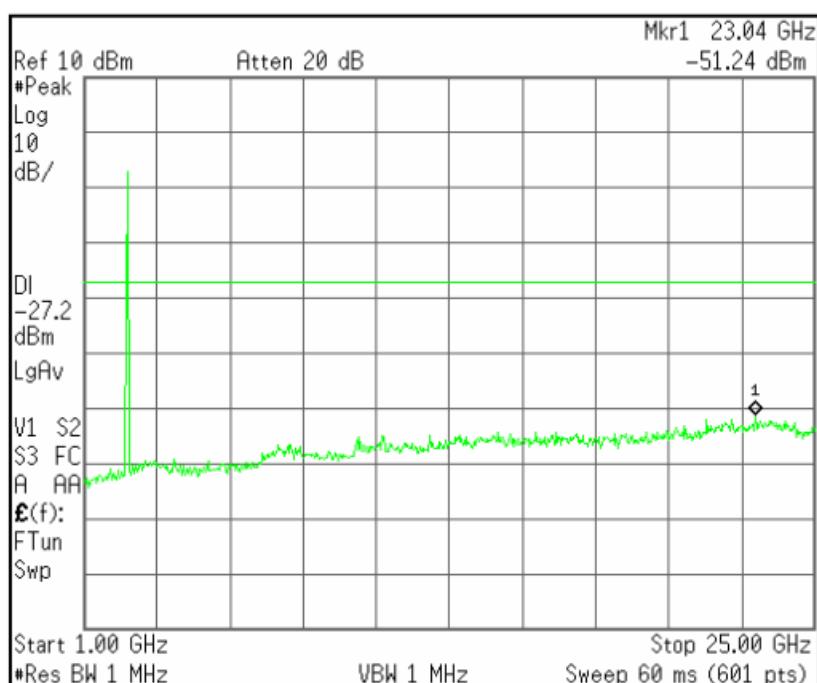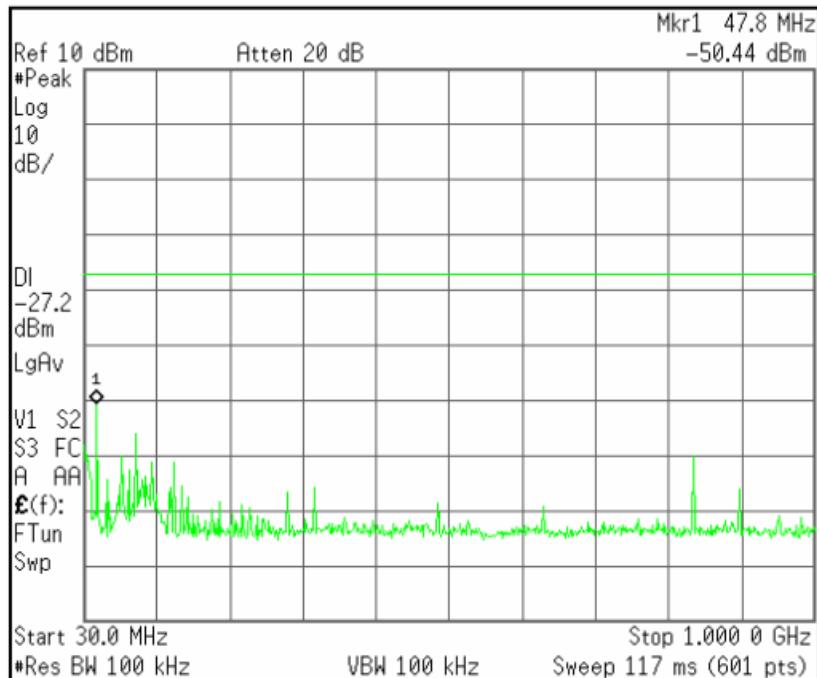

[CH Mid]

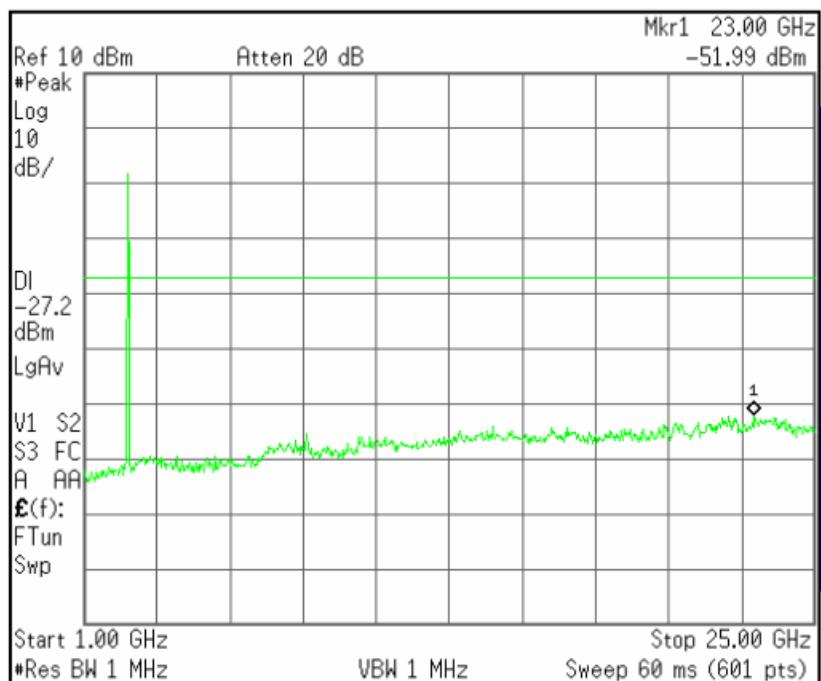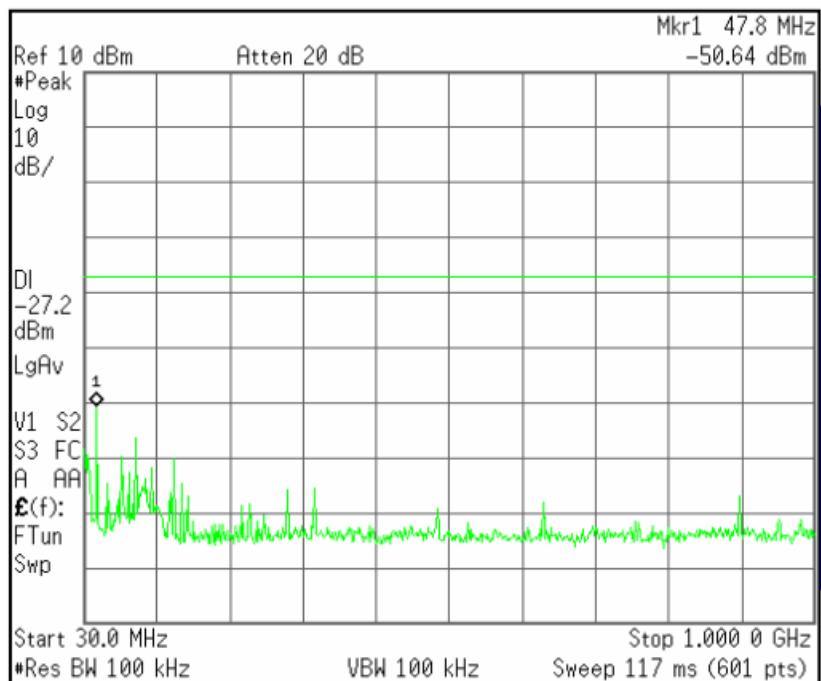

[CH High]

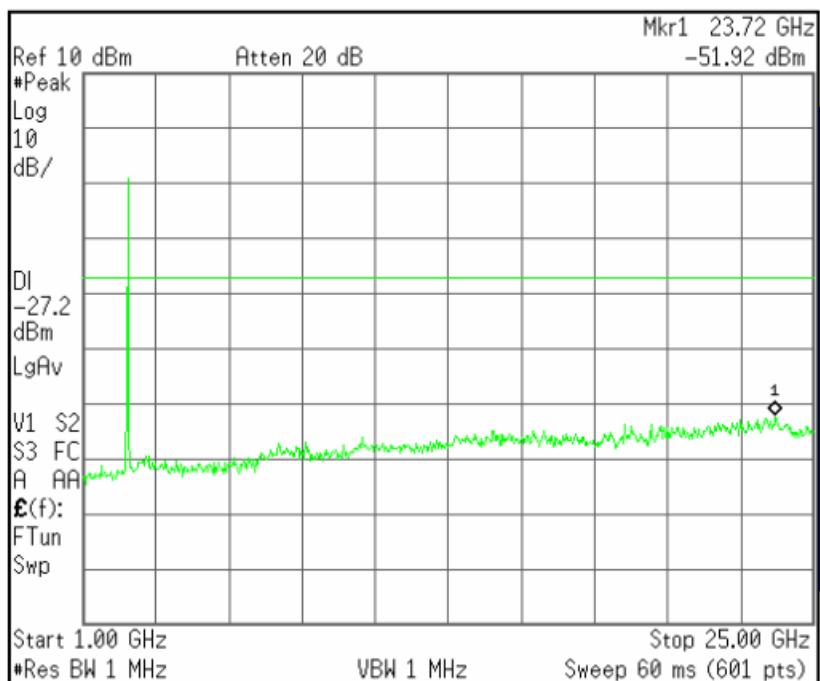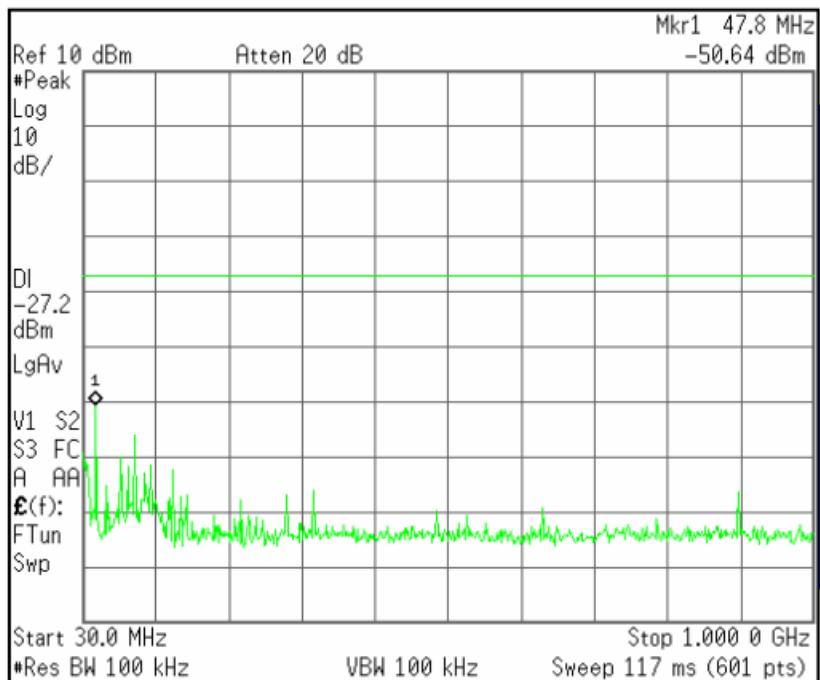

## 5.7 Conducted Emissions Measurement

EUT	HDuDTA / DMS2344UHDW
Limit apply to	FCC Part 15.207
Test Date	August 21, 2014
Environmental of Test	(20.4 ± 0.5) °C, (49 ± 1) % R.H., (100.3 ± 0.0) kPa
Operating Condition	RF transmitting continuously during the tested.
Result	Passed by 14.10 dB

### Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency of Emission [MHz]	Conducted limit [dB( $\mu$ V)]	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50

\* Decreases with the logarithm of the frequency.

### Test Results

- Refer to see the measured plot in next page.

## Conducted Emission Test Data


The following data and graph shows the highest levels of conducted emissions on both polarizations of hot and neutral line.

Detector mode: CISPR Quasi-Peak mode (6 dB Bandwidth: 9 kHz)

### NOTES:

1. Please see the measured data and graph in next page.
2. The c.f value was included the antenna factor and cable loss.
3. Result value = Reading + c.f
4. Margin value = Limit - Result
5. Measurements were performed at the AC Power Inlet in the frequency band of 150 kHz ~ 30 MHz according to the FCC Part 15 Class B.


Line: HOT

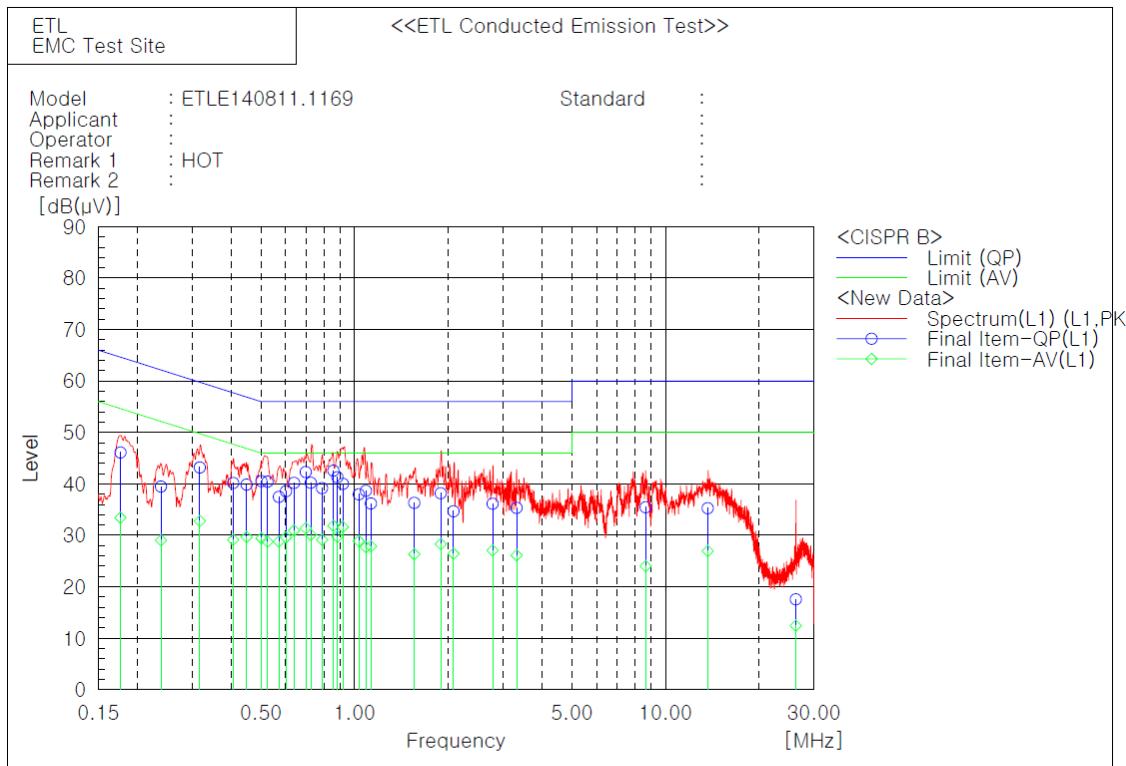

#### Final Result

--- L1 Phase ---												
No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading AV [dB(μV)]	c.f	Result QP [dB]	Result AV [dB(μV)]	Result QP [dB(μV)]	Result AV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin AV [dB]
1	0.17671	35.9	23.2	10.2	46.1	33.4	64.6	54.6	18.5	21.2		
2	0.23842	29.6	19.1	9.9	39.5	29.0	62.2	52.2	22.7	23.2		
3	0.3179	33.2	22.8	10.0	43.2	32.8	59.8	49.8	16.6	17.0		
4	0.40711	30.1	19.0	10.1	40.2	29.1	57.7	47.7	17.5	18.6		
5	0.44944	29.8	19.6	10.1	39.9	29.7	56.9	46.9	17.0	17.2		
6	0.50158	30.4	19.3	10.1	40.5	29.4	56.0	46.0	15.5	16.6		
7	0.5247	30.3	18.7	10.1	40.4	28.8	56.0	46.0	15.6	17.2		
8	0.57095	27.4	18.7	10.1	37.5	28.8	56.0	46.0	18.5	17.2		
9	0.60185	28.5	19.5	10.1	38.6	29.6	56.0	46.0	17.4	16.4		
10	0.63845	30.1	20.8	10.1	40.2	30.9	56.0	46.0	15.8	15.1		
11	0.69655	32.2	21.3	10.1	42.3	31.4	56.0	46.0	13.7	14.6		
12	0.72295	30.2	20.1	10.0	40.2	30.1	56.0	46.0	15.8	15.9		
13	0.7857	29.2	19.1	10.0	39.2	29.1	56.0	46.0	16.8	16.9		
14	0.8544	32.6	21.9	10.0	42.6	31.9	56.0	46.0	13.4	14.1		
15	0.8805	31.3	19.7	10.0	41.3	29.7	56.0	46.0	14.7	16.3		
16	0.91725	30.0	21.7	10.0	40.0	31.7	56.0	46.0	16.0	14.3		
17	1.032	28.0	18.9	10.0	38.0	28.9	56.0	46.0	18.0	17.1		
18	1.08755	28.8	17.8	9.9	38.7	27.7	56.0	46.0	17.3	18.3		
19	1.128	26.3	18.0	9.9	36.2	27.9	56.0	46.0	19.8	18.1		
20	1.55585	26.4	16.4	9.9	36.3	26.3	56.0	46.0	19.7	19.7		
21	1.89175	28.3	18.4	9.9	38.2	28.3	56.0	46.0	17.8	17.7		
22	2.0808	24.8	16.5	9.9	34.7	26.4	56.0	46.0	21.3	19.6		
23	2.77975	26.2	17.2	9.9	36.1	27.1	56.0	46.0	19.9	18.9		
24	3.31854	25.4	16.2	9.9	35.3	26.1	56.0	46.0	20.7	19.9		
25	8.63168	25.5	14.0	10.0	35.5	24.0	60.0	50.0	24.5	26.0		
26	13.6672	25.6	17.2	9.7	35.3	26.9	60.0	50.0	24.7	23.1		
27	26.2394	7.4	2.2	10.2	17.6	12.4	60.0	50.0	42.4	37.6		

## Line: Neutral

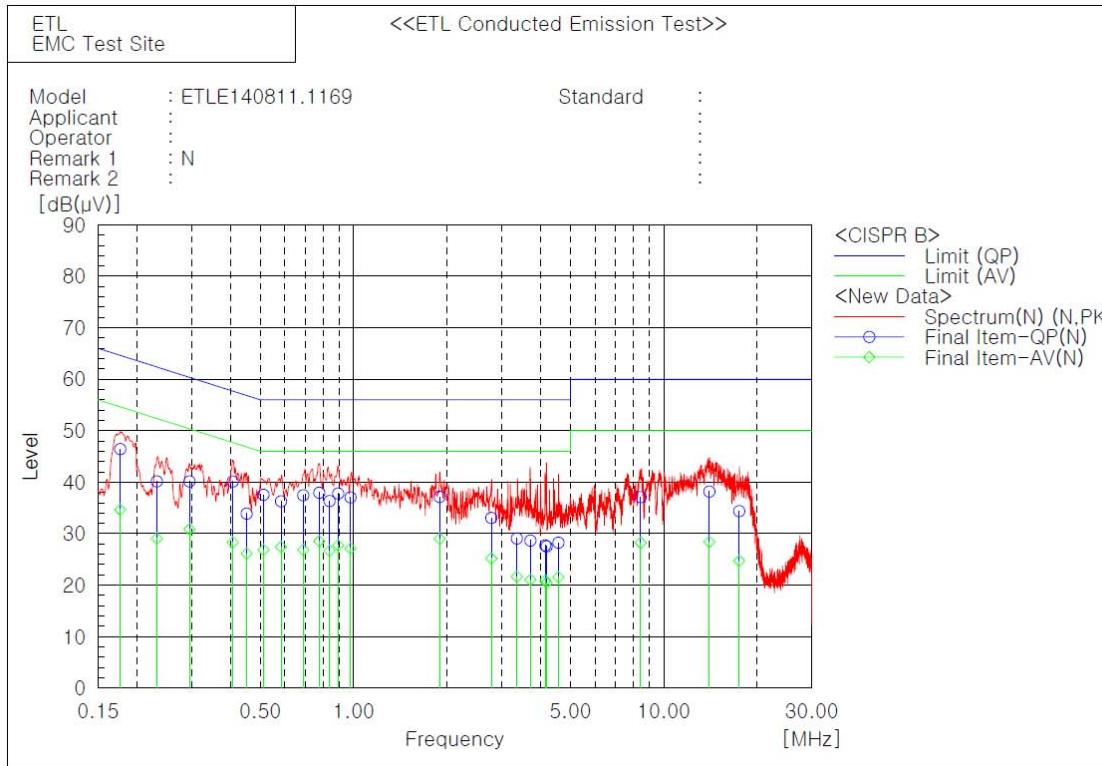

### Final Result

--- N Phase ---												
No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading AV [dB(μV)]	c. f	Result QP [dB]	Result AV [dB(μV)]	Result QP [dB(μV)]	Result AV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin AV [dB]
1	0.17684	36.0	24.3	10.4	46.4	34.7	64.6	54.6	54.6	18.2	19.9	
2	0.23205	29.9	18.8	10.2	40.1	29.0	62.4	52.4	52.4	22.3	23.4	
3	0.29566	30.2	20.9	10.0	40.2	30.9	60.4	50.4	50.4	20.2	19.5	
4	0.40757	30.2	18.4	9.9	40.1	28.3	57.7	47.7	47.7	17.6	19.4	
5	0.45212	24.0	16.2	9.9	33.9	26.1	56.8	46.8	46.8	22.9	20.7	
6	0.51205	27.6	16.9	9.9	37.5	26.8	56.0	46.0	46.0	18.5	19.2	
7	0.58345	26.4	17.6	9.9	36.3	27.5	56.0	46.0	46.0	19.7	18.5	
8	0.6878	27.5	17.0	9.9	37.4	26.9	56.0	46.0	46.0	18.6	19.1	
9	0.77535	28.1	18.7	9.8	37.9	28.5	56.0	46.0	46.0	18.1	17.5	
10	0.83665	26.5	16.9	9.8	36.3	26.7	56.0	46.0	46.0	19.7	19.3	
11	0.8916	28.0	17.9	9.8	37.8	27.7	56.0	46.0	46.0	18.2	18.3	
12	0.97705	27.3	17.3	9.8	37.1	27.1	56.0	46.0	46.0	18.9	18.9	
13	1.89545	27.4	19.2	9.8	37.2	29.0	56.0	46.0	46.0	18.8	17.0	
14	2.7799	23.3	15.4	9.8	33.1	25.2	56.0	46.0	46.0	22.9	20.8	
15	3.36102	19.3	11.8	9.8	29.1	21.6	56.0	46.0	46.0	26.9	24.4	
16	3.71538	18.9	11.2	9.8	28.7	21.0	56.0	46.0	46.0	27.3	25.0	
17	4.15074	17.9	11.1	9.8	27.7	20.9	56.0	46.0	46.0	28.3	25.1	
18	4.19244	17.7	10.7	9.8	27.5	20.5	56.0	46.0	46.0	28.5	25.5	
19	4.57404	18.5	11.8	9.8	28.3	21.6	56.0	46.0	46.0	27.7	24.4	
20	8.42144	27.1	18.2	10.0	37.1	28.2	60.0	50.0	50.0	22.9	21.8	
21	14.0308	28.1	18.3	10.1	38.2	28.4	60.0	50.0	50.0	21.8	21.6	
22	17.515	24.2	14.5	10.2	34.4	24.7	60.0	50.0	50.0	25.6	25.3	

## 5.8 Radio Frequency Exposure

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See § 1.1307(b)(1) of this Chapter.

### Limit

Limits for general population/Uncontrolled exposure

Frequency Range [MHz]	Electric Field Strength (E) [V/m]	Magnetic Field Strength (H) [A/m]	Power Density (S) [mW/cm <sup>2</sup> ]	Averaging Time  E  <sup>2</sup> ,  H  <sup>2</sup> or S [minutes]
0.3 - 1.34	614	1.63	(100)	30
1.34 - 30	824/f	2.19/f	(180/f <sup>2</sup> )	30
30 - 300	27.5	0.073	0.2	30
300 - 1 500	--	--	f/1 500	30
1 500 - 100 000	--	--	1.0	30

f = frequency in MHz

\*Plane-wave equivalent power density

### MPE Prediction

Predication of MPE limit at a given distance.

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S = power density (in appropriate units, e.g. mW/cm<sup>2</sup>)

P = power input to the antenna (in appropriate units, e.g., mW)

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

Maximum peak output power at antenna input	: -7.28 dBm (0.187 mW)
Prediction distance	: 20 cm
Predication frequency	: 2 425 MHz
Antenna gain(Max)	: -2.30 dBi (0.588 8 numeric)
Power density at predication frequency at 20 cm	: 0.000 021 9 mW/cm <sup>2</sup>
MPE Limit for	: 1 mW/cm <sup>2</sup>

### Test Result

The power density level at 20 cm is 0.000 021 9 mW/cm<sup>2</sup> which is below the uncontrolled exposure limit of 1 mW/cm<sup>2</sup> at 2 425 MHz to 2 475 MHz.

## 6. SAMPLE CALCULATION

### Sample Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor.

The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - PA$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

PA\* = Preamplifier Factor

\* PA is only be used for the measuring frequency above 1 GHz.

$$dB(\mu V) = 20 \log_{10} (\mu V) : \text{Equation}$$

$$dB(\mu V) = dBm + 107$$

Example : @ 4 901.15 MHz

$$\text{Class B Limit} = 53.97 \text{ dB}(\mu V/m) \text{ (Average)}$$

$$\text{Reading} = 53.01 \text{ dB}(\mu V)$$

$$\text{Antenna Factor} + (\text{Cable loss} + \text{Amp. Gain}) = 32.15 + (-34.66) = -2.51 \text{ dB}(\mu V/m)$$

$$\text{Total} = 50.50 \text{ dB}(\mu V/m)$$

$$\text{Margin} = 53.97 - 50.50 = 3.47 \text{ dB}$$

= 3.47 dB below Limit

## 7. List of test equipments used for measurements

Test Equipment		Model	Mfg.	Serial No.	Cal. Date	Cal. Due Date
<input checked="" type="checkbox"/>	EMI Test Receiver	ESVS 10	R&S	835165/001	14.03.18	15.03.18
<input checked="" type="checkbox"/>	EMI Test Receiver	ESPI3	R&S	100478	13.09.05	14.09.05
<input checked="" type="checkbox"/>	EMI Test Receiver	ESCS30	R&S	847793/005	14.03.18	15.03.18
<input checked="" type="checkbox"/>	EMI Test Receiver	ESCI7	R&S	100851	13.09.05	14.09.05
<input checked="" type="checkbox"/>	Two-Line V-Network	ENV216	R&S	958599/106	14.03.18	15.03.18
<input checked="" type="checkbox"/>	LISN	3816-2	EMCO	1002	13.09.05	14.09.05
<input checked="" type="checkbox"/>	Loop Antenna	6502	EMCO	00033743	12.09.24	14.09.24
<input checked="" type="checkbox"/>	LogBicon Antenna	VULB9160	Schwarzbeck	3082	13.07.25	15.07.25
<input checked="" type="checkbox"/>	Horn Antenna	BBHA 9120D	Schwarzbeck	826	14.04.02	16.04.02
<input checked="" type="checkbox"/>	Spectrum Analyzer	E7405A	H.P.	US41160290	13.09.05	14.09.05
<input checked="" type="checkbox"/>	PSA Series Spectrum Analyzer	E4440A	Agilent	US40420382	13.09.11	14.09.11
<input checked="" type="checkbox"/>	Amplifier	TK-PA18	TESTEK	120020	13.09.05	14.09.05
<input checked="" type="checkbox"/>	System Power Supply	6030A	Agilent	1036546	14.03.17	15.03.17
<input checked="" type="checkbox"/>	Band Reject Filter	WRCGV 2402/2480-2382/2500-52/10SS	Wainwright Instrument	2	13.09.05	14.09.05
<input checked="" type="checkbox"/>	Highpass Filter	WHKX3.0 /18G-6SS	Wainwright Instrument	15	14.03.18	15.03.18
<input checked="" type="checkbox"/>	Power Meter	NRVS	R&S	834053/060	13.09.05	14.09.05
<input checked="" type="checkbox"/>	Turn-Table	DS1200-S	Innco Systems GmbH	2740311	N/A	N/A
<input checked="" type="checkbox"/>	Turn-Table	TT 1.35 SI	SES	-	N/A	N/A
<input checked="" type="checkbox"/>	Antenna Master	AM 4.5	SES	-	N/A	N/A