


# ***4 Port USB Mini Hub***

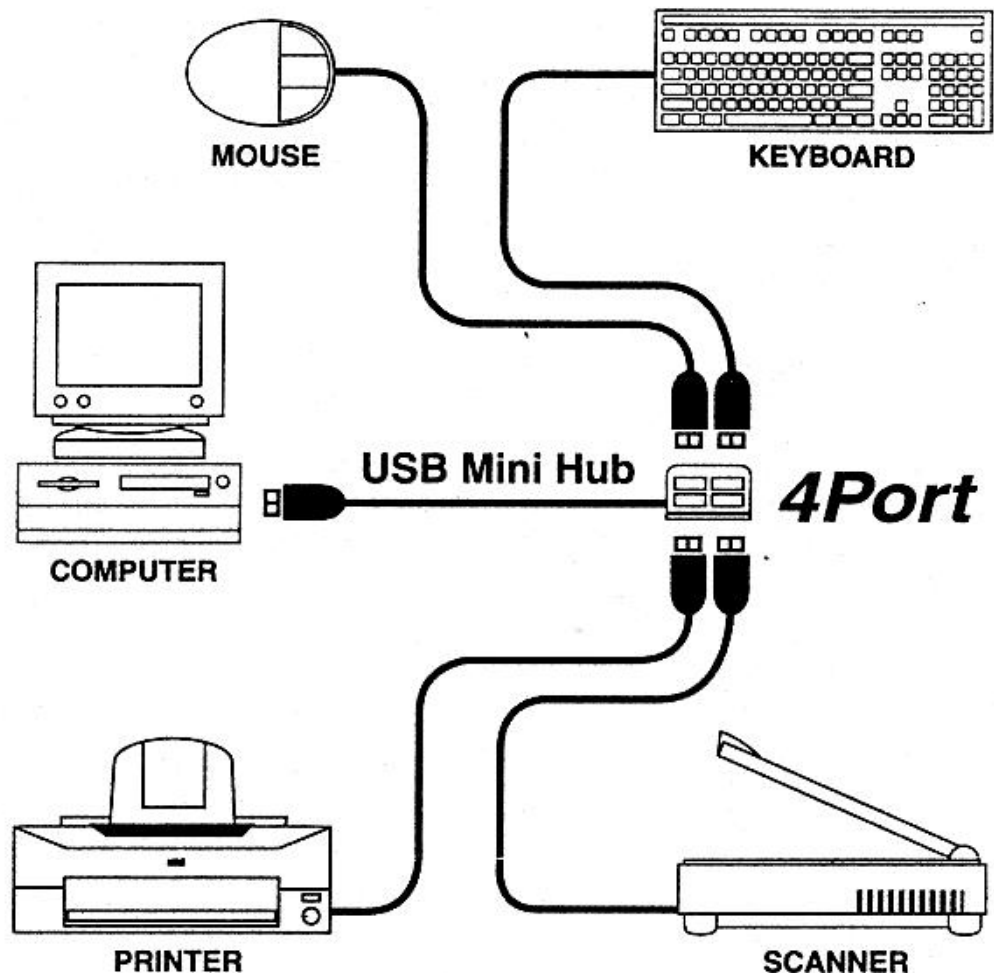

## **Features:**

- Full compliance with USB spec v.1.1
- Reliable with 5 meters transmission distance
- Plug and play
- Support both full speed and low speed devices
- 4 downstream ports with automatic connectivity and speed detection function
- Overcurrent detection, protection and recovery
- Bus power mode
- Compatible with PC windows 98/2000 and iMac OS

## **Feature of Equipment under Test**

- Compliant with USB specification 1.0 & 1.1
- Compatible with Win98 & Win2000.
- Support both OHCI & UHCI.
- Plug and Play for easy use.
- Reliable 5 meters transmission distance.
- 4 Downstream ports with automatic connectivity and speed detection function.
- Overcurrent detection, protection and recovery.
- Bus fault detection and recovery.

## **Federal Communications Commission (FCC) Statement**

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the part responsible for compliance could void the user's authority to operate the equipment.

## **INFORMATION TO USER:**

*This equipment has been tested and found to comply with the limits of a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation; if this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:*

- 1. Reorient / Relocate the receiving antenna.*
  - 2. Increase the separation between the equipment and receiver.*
  - 3. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.*
  - 4. Consult the dealer or an experienced radio/TV technician for help.*
- Shielded interface cable(s) must be used to ensure product compliance.