

EUT: ID MAX50.10-SRE
FCC ID: PJMCPR5010

Date of issue: 2009-09-22



TTI-P-G-128/96

Test Report

acc. to the relevant standard

47 CFR Part 15 C – Intentional Radiators

Measurement Procedure:

ANSI C63.4-2003

relating to

FEIG ELECTRONIC GmbH

ID MAX50.10-SRE

**Methods of Measurement of Radio-
Noise Emissions from Low-Voltage
Electrical and Electronic Equipment
in the Range 9 kHz to 40 GHz**



DAT-P-225/96

EUT: ID MAX50.10-SRE
 FCC ID: PJMCPR5010

Date of issue: 2009-09-22

Manufacturer's details	
Manufacturer	FEIG ELECTRONIC GmbH
Manufacturer's grantee code	PJM
Manufacturer's address	Lange Straße 4
	35781 Weilburg
	Germany
	Mr. Bernhard Schüßler
	Phone: +49 (0)6471 31 09 435
	Fax: +49 (0)6471 31 09 99
	Email: Bernhard.schuessler@feig.de
Relevant standard used	47 CFR Part 15C - Intentional Radiators
	ANSI C63.4-2003

Test report prepared by	
Technical engineer	Ralf Trepper
	m.dudde hochfrequenz-technik (laboratory)
	Rottland 5a
	51429 Bergisch Gladbach
	Germany
	Phone: +49 (0) 2207 96 89-0
	Fax: +49 (0) 2207 96 89-20
	E-mail: m.dudde@labor@dudde.com

Equipment Under Test (EUT)	
Equipment category	RFID
Trade name	FEIG ELECTRONIC GmbH
Type designation	ID MAX50.10-SRE
Serial no.	IP: 192.168.3.143
Variants	ID MAX50.10-E
	ID MAX50.10-RE
	ID MAX50.10-SE
	ID CPR50.10-E
	ID CPR50.10-RE
	ID CPR50.10-SE
	ID CPR50.10SRE

EUT: ID MAX50.10-SRE
FCC ID: PJMCPR5010

Date of issue: 2009-09-22

1. Test result summary


CFR Section	Report Chapter	Requirements Headline	Test result		
15.203	11.1	Antenna Requirement	Pass	Fail	N.t.
15.205	11.2	Restricted bands of operation	Pass	Fail	N.t.
15.225(a)(b)(c)(d) 15.209	11.3	Radiated spurious emissions	Pass	Fail	N.t.
15.225(e)	11.4	Frequency tolerance	Pass	Fail	N.t.
15.207	11.5	Conducted limits	Pass	Fail	N.t.

The equipment meets the requirements	Yes	No
--------------------------------------	-----	---------------

Signature test personnel


Ralf Trepper

Signature of the company official


Manfried Dudde

EUT: ID MAX50.10-SRE
FCC ID: PJMCPR5010**Date of issue: 2009-09-22**

Table of contents

1. Test result summary	3
2. Test laboratory	5
3. Introduction.....	5
4. Product.....	6
5. Test schedule.....	6
6. Product and measurement documentation	7
7. Observations and comments	7
8. Summary.....	7
9. Conclusions.....	8
10. Operational description.....	9
11.1 Antenna requirement.....	10
11.1.1 Regulation.....	10
11.1.2 Result	10
Integrated antenna	10
11.2 Restricted bands of operation.....	11
11.2.1 Regulation.....	11
11.2.2 Result	13
11.3 Radiated emission limits, general requirements.....	14
11.3.1 Regulation.....	14
11.3.2 Test equipment.....	15
11.3.3 Test procedure.....	16
11.3.4 Calculation of the field strength.....	17
11.3.5 Test result.....	18
11.4 Frequency tolerance	23
11.4.1 Regulation.....	23
11.4.2 Test equipment.....	23
11.4.3 Test procedures	23
11.4.4 Result	24
11.5 Conducted limits	25
11.5.1 Regulation.....	25
11.5.2 Test equipment.....	26
11.5.3 Test procedures	26
11.5.4 Test results	27
12 Additional information to this test report.....	29
Remarks.....	29
End of test report	30

EUT: ID MAX50.10-SRE
FCC ID: PJMCPR5010**Date of issue: 2009-09-22**

2. Test laboratory

Company name : m.dudde hochfrequenz-technik
Street : Rottland 5a
City : 51429 Bergisch Gladbach
Country : Germany
Laboratory : FCC Registration Number: 699717
This site has been fully described in a report submitted to the FCC, and renewed with letter dated July 12, 2008, Registration Number 699717.
Phone : +49-2207-9689-0
Fax : +49-2207-9689-20
E-Mail : manfred.dudde@t-online.de
Web : <http://www.dudde.com>

3. Introduction

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of m. dudde hochfrequenz - technik.

This report contains the result of tests performed by m. dudde hochfrequenz - technik for the purpose of a type approval. The order for carrying out these tests has been placed by:

Manufacturer

Company name : FEIG ELECTRONIC GmbH
Address : Lange Straße 4
Postcode : D35781
City/town : Weilburg
Country : Germany
Telephone : +49 (0) 6471 31 09 435
Telefax : +49 (0) 6471 31 09 99
E-mail : bernhard.schuessler@feig.de
Date of order : 2008-07-23
References : Mr. Bernhard Schüßler

EUT: ID MAX50.10-SRE
FCC ID: PJMCPR5010

Date of issue: 2009-09-22

4. Product

Samples of the following apparatus were submitted for testing:

Type of equipment	: RFID
Trademark	: FEIG ELECTRONIC GmbH
Type designation	: ID MAX5010-SRE
Hardware version	: ID MAX5010-SRE
Serial number	: IP: 192.168.3.143
Software release	: ---
Power used	: 48.0 V DC (PoE)
Frequency used	: 13.560 MHz
Generated or used frequencies	: 13.560 MHz (carrier frequency), 13.560 MHz (crystal), 18.432 MHz (crystal), 25.000 MHz (crystal), 32.768 kHz (crystal)
ITU emission class	: 30K3A1D
FCC ID	: PJMCPR5010

5. Test schedule

The tests were carried out in accordance with the specifications detailed in chapter 7 “Summary“ of this report at:

- m. dudde hochfrequenz - technik, D-51429 Bergisch Gladbach

The test sample was received on:

- 2009-07-23

The tests were carried out in the following period of time:

- 2009-07-28 - 2009-09-09

EUT: ID MAX50.10-SRE
FCC ID: PJMCPR5010**Date of issue: 2009-09-22**

6. Product and measurement documentation

For issuing this report the following product documentation was used and the following annexes were created:

Description	Date	Identifications
External photographs of the Equipment Under Test	2009-09-21	Annex no. 1
Internal photographs of the Equipment Under Test	2009-09-21	Annex no. 2
Occupied bandwidth plot	2009-09-21	Annex no. 3
FCC ID label sample	2009-09-21	Annex no. 4
Functional description / User Manual	2009-09-21	Annex no. 5
Test setup photos	2009-09-21	Annex no. 6
Block diagram	2009-09-21	Annex no. 7
Schematics	2009-09-21	Annex no. 8
Parts list	2009-09-21	Annex no. 9
Operational description	2009-09-21	Annex no. 10

The above mentioned documentation will be filed at m. dudde hochfrequenz - technik for a period of 10 years following the issue of this test report.

7. Observations and comments

The test sample ID MAX50.10-SRE is the maximal configuration of all kinds of variants. All variants are technical identical, but they differ in their assembly.

The variants are listed on page 2.

Additional equipment for the tests to carry on the ID MAX50.10-SRE:

**I.T.E. Power Supply (PoE),
PW183RD4800F01
Input: 100-250 V AC, 50-60Hz, 1.0 A
Output: +48 V DC, 625 mA**

8. Summary

The product is intended for the use in the following areas of application:

**Radio-Noise Emissions from Low- Voltage Electrical and Electronic Equipment
in the frequency range of 9 kHz to 40 GHz**

The samples were tested according to the following specification:

47 CFR Part 15 – Intentional Radiators, ANSI C63.4-2003

EUT: ID MAX50.10-SRE
FCC ID: PJMCPR5010

Date of issue: 2009-09-22

9. Conclusions

Samples of the apparatus were found to **CONFORM WITH** the specifications stated in chapter 8 "Summary" of this report.

In the opinion of m. dudde hochfrequenz - technik, the samples satisfied all applicable requirements relating to the network interface types specified in chapter 8.

The results of the type tests as stated in this report are exclusively applicable to the product item as identified in this report. m. dudde hochfrequenz - technik does not accept any responsibility for the results stated in this report, with respect to the properties of product items not involved in these tests.

This report consists of a main module, modules with test results and annexes listed in chapter 6. All pages have been numbered consecutively and bear the m. dudde hochfrequenz - technik logo, the report number and sub-numbers.

The total number of pages in this report is **30**.

Technical inspector:

Date : 2009-09-22

Name : Ralf Trepper

Signature : 

Technical responsibility for area of testing:

Date : 2009-09-22

Name : Manfred Dudde

Signature : 

EUT: ID MAX50.10-SRE
FCC ID: PJMCPR5010

Date of issue: 2009-09-22

10. Operational description

10.1 EUT details

The manual describes the electronic-parts of the **ID MAX5010-SRE** 13.56 MHz Reader System. This Reader electronics are designed as a multi-tag System to read and write information stored on transponders (tags). The reader-electronic is compatible with standards ISO/IEC 14443 type A and type B and ISO/IEC 15693.

10.2 EUT configuration

The **ID MAX5010-SRE** will be set in continuous transmission mode via software and over an USB connected Laptop. After programming the EUT the Laptop are disconnected. No other changes will be done.

10.3 EUT measurement description

Radiated measurements

The **ID CPR5010** was tested in a typical fashion. During preliminary emission tests the **ID MAX5010-SRE** was operated in the continuous transmitting mode for worst case emission mode investigation. Therefore, the final qualification testing was completed with **ID MAX5010-SRE** operated in continuous modes.

All tests were performed with the applicant's declared maximal voltage: 48 V DC (PoE)

In order to establish the maximum radiation, firstly, there have been viewed all orthogonal adjustments of the test samples, secondly the test ample have been rotated at all adjustments around the own axis between 0° and 360°, and thirdly, the antenna polarization between horizontal and vertical had been varied.

Conducted measurements

The **ID MAX5010-SRE** was connected over Cat5e cable to the artificial mains network via the external Power over Ethernet supply **PW183RD4800F01** and this to the artificial mains network. It has been tested only in continuous mode. L1 and N have been viewed.

EUT: ID MAX50.10-SRE
FCC ID: PJMCPR5010

Date of issue: 2009-09-22

11.1 Antenna requirement

11.1.1 Regulation

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

11.1.2 Result

The equipment meets the requirements	Yes	No	N.A.
--------------------------------------	-----	---------------	-----------------

Further test results are attached	Yes	No	Page no.
-----------------------------------	----------------	----	----------

Integrated loop antenna

n.a.* See page no. 38

EUT: ID MAX50.10-SRE
 FCC ID: PJMCPR5010

Date of issue: 2009-09-22

11.2 Restricted bands of operation

11.2.1 Regulation

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	⁽²⁾
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

(c) Except as provided in paragraphs (d) and (e), regardless of the field strength limits specified elsewhere in this Subpart, the provisions of this Section apply to emissions from any intentional radiator.

EUT: ID MAX50.10-SRE
FCC ID: PJMCPR5010

Date of issue: 2009-09-22

(d) The following devices are exempt from the requirements of this Section:

- (1) Swept frequency field disturbance sensors operating between 1.705 and 37 MHz provided their emissions only sweep through the bands listed in paragraph (a), the sweep is never stopped with the fundamental emission within the bands listed in paragraph (a), and the fundamental emission is outside of the bands listed in paragraph (a) more than 99% of the time the device is actively transmitting, without compensation for duty cycle.
- (2) Transmitters used to detect buried electronic markers at 101.4 kHz which are employed by telephone companies.
- (3) Cable locating equipment operated pursuant to Section 15.213.
- (4) Any equipment operated under the provisions of § 15.253, § 15.255 or § 15.257 of this part.
- (5) Biomedical telemetry devices operating under the provisions of Section 15.242 of this part are not subject to the restricted band 608-614 MHz but are subject to compliance within the other restricted bands.
- (6) Transmitters operating under the provisions of Subpart D or F of this part.
- (7) Devices operated pursuant to § 15.225 are exempt from complying with this section for the 13.36-13.41 MHz band only.
- (8) Devices operated in the 24.075-24.175 GHz band under § 15.245 are exempt from complying with the requirements of this section for the 48.15-48.35 GHz and 72.225-72.525 GHz bands only, and shall not exceed the limits specified in § 15.245(b).
- (9) Devices operated in the 24.0-24.25 GHz band under § 15.249 are exempt from complying with the requirements of this section for the 48.0-48.5 GHz and 72.0-72.75 GHz bands only, and shall not exceed the limits specified in § 15.249(a).

(e) Harmonic emissions appearing in the restricted bands above 17.7 GHz from field disturbance sensors operating under the provisions of Section 15.245 shall not exceed the limits specified in Section 15.245(b).

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

(c) Except as provided in paragraphs (d) and (e), regardless of the field strength limits specified elsewhere in this Subpart, the provisions of this Section apply to emissions from any intentional radiator. (d) The following devices are exempt from the requirements of this Section:

- (1) Swept frequency field disturbance sensors operating between 1.705 and 37 MHz provided their emissions only sweep through the bands listed in paragraph (a), the sweep is never stopped with the fundamental emission within the bands listed in paragraph (a), and the fundamental emission is outside of the bands listed in paragraph (a) more than 99% of the time the device is actively transmitting, without compensation for duty cycle.

EUT: ID MAX50.10-SRE
FCC ID: PJMCPR5010**Date of issue: 2009-09-22**

- (2) Transmitters used to detect buried electronic markers at 101.4 kHz which are employed by telephone companies.
- (3) Cable locating equipment operated pursuant to Section 15.213.
- (4) Any equipment operated under the provisions of § 15.253, § 15.255 or § 15.257 of this part.
- (5) Biomedical telemetry devices operating under the provisions of Section 15.242 of this part are not subject to the restricted band 608-614 MHz but are subject to compliance within the other restricted bands.
- (6) Transmitters operating under the provisions of Subpart D or F of this part.
- (7) Devices operated pursuant to § 15.225 are exempt from complying with this section for the 13.36-13.41 MHz band only.
- (8) Devices operated in the 24.075-24.175 GHz band under § 15.245 are exempt from complying with the requirements of this section for the 48.15-48.35 GHz and 72.225-72.525 GHz bands only, and shall not exceed the limits specified in § 15.245(b).
- (9) Devices operated in the 24.0-24.25 GHz band under § 15.249 are exempt from 83 complying with the requirements of this section for the 48.0-48.5 GHz and 72.0-72.75 GHz bands only, and shall not exceed the limits specified in § 15.249(a).
- (e) Harmonic emissions appearing in the restricted bands above 17.7 GHz from field disturbance sensors operating under the provisions of Section 15.245 shall not exceed the limits specified in Section 15.245(b).

11.2.2 Result

The equipment meets the requirements	Yes	No	NA
Further test results are attached	Yes	No	Page no.

EUT: ID MAX50.10-SRE
FCC ID: PJMCPR5010**Date of issue: 2009-09-22**

11.3 Radiated emission limits, general requirements

11.3.1 Regulation

(a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

(b) In the emission table above, the tighter limit applies at the band edges.

(c) The level of any unwanted emissions from an intentional radiator operating under these general provisions shall not exceed the level of the fundamental emission. For intentional radiators which operate under the provisions of other sections within this part and which are required to reduce their unwanted emissions to the limits specified in this table, the limits in this table are based on the frequency of the unwanted emission and not the fundamental frequency. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.

(d) The emission limits shown in the above table are based on measurements employing a CISPR quasi peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

(e) The provisions in §§ 15.31, 15.33, and 15.35 for measuring emissions at distances other than the distances specified in the above table, determining the frequency range over which radiated emissions are to be measured, and limiting peak emissions apply to all devices operated under this part.

(f) In accordance with Section 15.33(a), in some cases the emissions from an intentional radiator must be measured to beyond the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator because of the incorporation of a digital device. If measurements above the tenth harmonic are so required, the radiated emissions above the tenth harmonic shall comply with the general radiated emission limits applicable to the incorporated digital device, as shown in Section 15.109 and as based on the frequency of the emission being measured, or, except for emissions contained in the restricted frequency bands shown in Section 15.205, the limit on spurious emissions specified for the intentional radiator, whichever is the higher limit. Emissions which must be measured above the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator and which fall within the restricted bands shall comply with the general radiated emission limits in Section 15.109 that are applicable to the incorporated digital device.

EUT: ID MAX50.10-SRE

Date of issue: 2009-09-22

FCC ID: PJMCPR5010

11.3.2 Test equipment

Type	Manufacturer/ Model no.	Serial no.	Last calibration	Next calibration
Receiver (9 kHz –18.0 GHz)	Rohde & Schwarz Spectrum Analyzer FSL 18 (171a)	100.117	2008/10	2010/10
Receiver (9 kHz –40.0 GHz)	Anritsu Spectrum Analyzer MS2668C (359a)	6200163244	2009/04	2011/04
Pre-amplifier (100kHz - 1.3GHz)	Hewlett Packard 8447 E (166a)	1726A00705	2008/02	2010/02
Pre-amplifier (1GHz - 18GHz)	Narda --- (345)	---	2008/02	2010/02
Bilog antenna (30- 1000 MHz)	Schwarzbeck VULP 9168 (406)		2007/02	2013/02
Horn antenna (0.86-8.5 GHz)	Schwarzbeck BBHA 9120 A (284)	236	2008/01	2013/01
Horn antenna (2.0-14.5 GHz)	Schwarzbeck BBHA 9120 C (169)	305	2008/01	2013/01
Horn antenna (14.5-40 GHz)	Schwarzbeck BBHA 9170 (281)	41	2000/01	2010/01
RF- cable	Kabelmetal 18m [N]	K1	2009/01	2010/01
RF- cable	Aircell 0.5m [BNC]	K40	2009/01	2010/01
RF- cable	Aircell 1m [BNC/N]	K56	2009/01	2010/01
RF- cable	Sucoflex 106 Suhner 6,4m [N]	K74	2009/01	2010/01
RF- cable	Sucoflex 106 Suhner 6,4m [N]	K75	2009/01	2010/01

EUT: ID MAX50.10-SRE
FCC ID: PJMCPR5010

Date of issue: 2009-09-22

11.3.3 Test procedure

The EUT and this peripheral (when additional equipment exists) are placed on a turn table which is 0.8 m above the ground. The turn table would be allowed to rotate 360 degrees to determine the position of the maximum emission level. The test distance between the EUT and the receiving antenna are 3m. To find the maximum emission, the polarization of the receiving antenna is changed in horizontal and vertical polarization; the position of the EUT was changed in different orthogonal determinations.

ANSI C63.4: 2003 Section 8 “Radiated Emissions Testing”

Measurement procedures for electric field radiated emissions above 1 GHz are covered in Clause 8 of ANSI C63.4-2003. The C63.4-2003 measurement procedure consists of both an exploratory test and a final measurement. The exploratory test is critical to determine the frequency of all significant emissions. For each mode of operation required to be tested, the frequency spectrum is monitored. Variations in antenna height, antenna orientation, antenna polarization, EUT azimuth, and cable or wire placement is explored to produce the emission that has the highest amplitude relative to the limit.

The final measurements are made based on the findings in the exploratory testing. When making exploratory and final measurements it is necessary to maximize the measured radiated emission. Subclause 8.3.1.2 of C63.4-2003 states that the measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” We consider the “cone of radiation” to be the 3 dB beam width of the measurement antenna.

While the “bore-sighting” technique is not explicitly mentioned in C63.4-2003, it is a useful technique for measurements using a directional antenna, such as a double-ridged waveguide antenna. Several precautions must be observed, including: knowledge of the beam width of the antenna and the resulting illumination area relative to the size of the EUT, estimation for source of the emission and general location within larger EUTS, measuring system sensitivity, etc.

C63.4-2003 requires that the measurement antenna is kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. That means that if the directional radiation pattern of the EUT results in a maximum emission at an upwards angle from the EUT, when a directional antenna is used to make the measurement it will be necessary for it to be pointed towards the source of the emission within the EUT. This can be done by either pointing the antenna at an angle towards the source of the emission, or by rotating the EUT, in both height and polarization, to maximize the measured emission. The emission must be kept within the illumination area of the 3 dB beamwidth of the antenna so that the maximum emission from the EUT is measured.

EUT: ID MAX50.10-SRE
FCC ID: PJMCPR5010**Date of issue: 2009-09-22**

Radiated emissions test characteristics	
Frequency range	30 MHz - 4,000 MHz
Test distance	3 m*
Test instrumentation resolution bandwidth	120 kHz (30 MHz - 1,000 MHz)
	1 MHz (1000 MHz - 4,000 MHz)
Receive antenna scan height	1 m - 4 m
Receive antenna polarization	Vertical/horizontal

* According to Section 15.31 (f) (1): At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

11.3.4 Calculation of the field strength

The field strength is calculated by the following calculation:

Corrected Level = Receiver Level + Correction Factor (without the use of a pre-amplifier)

Corrected Level = Receiver Level + Correction Factor – Pre-amplifier (with the use of a pre-amplifier)

Receiver Level : Receiver reading without correction factors

Correction Factor : Antenna factor + cable loss

For example:

The receiver reading is 32.7 dB μ V. The antenna factor for the measured frequency is +2.5 dB (1/m) and the cable factor for the measured frequency is 0.71 dB, giving a field strength of 35.91dB μ V/m.

The 35.91dB μ V/m value can be mathematically converted to its corresponding level in μ V/m.

Level in μ V/m = Common Antilogarithm (35.91/20) = 39.8

For test distance other than what is specified, but fulfilling the requirements of Section 15.31 (f) (1) the field strength is calculated by adding additionally an extrapolation factor of 20 dB/decade (inverse linear distance for field strength measurements).

EUT: ID MAX50.10-SRE
 FCC ID: PJMCPR5010

Date of issue: 2009-09-22

11.3.5 Test result

For all emission other than harmonic spurious emissions

TRANSMITTER SPURIOUS RADIATION BELOW 30 MHz (Section 15.205, 15.209)									
f (MHz)	Bandwidth (kHz) Type of detector	Noted receiver level dBμV	Test distance m	Correction factor dB	Distance extrapol. factor dB	Level corrected dBμV/m	Limit dBμV/m	Margin dBμV/m	Polarisation EUT / antenna orientation
0.1200	PK/0.2kHz	< 4.0	10	20.2	-59.1	-34.90	Pk46.0- @ 300	80.90	V, H/0-360°
	AV/0.2kHz	< 4.0	10	20.2	-59.1	-34.90	AV26.0 @ 300	80.90	V, H/0-360°
0.5000	AV/0.2kHz	< 4.0	10	20.2	-19.1	5.10	AV33.6 @ 30	28.5	V, H/0-360°
1.5000	AV/0.2kHz	< 4.0	10	20.2	-19.1	5.10	AV24.1 @ 30	19.00	V, H/0-360°
3.0000	AV/9.0kHz	< 4.0	10	20.2	-19.1	5.10	AV29.5 @ 30	24.4	V, H/0-360°
5.0000	AV/9.0kHz	< 4.0	10	20.2	-19.1	5.10	AV29.5 @ 30	24.4	V, H/0-360°
8.0000	AV/9.0kHz	< 4.0	10	20.2	-19.1	5.10	AV29.5 @ 30	24.4	V, H/0-360°
10.0000	AV/9.0kHz	< 4.0	10	20.2	-19.1	5.10	AV29.5 @ 30	24.4	V, H/0-360°
20.0000	AV/9.0kHz	< 4.0	10	20.2	-19.1	5.10	AV29.5 @ 30	24.4	V, H/0-360°
30.0000	AV/9.0kHz	< 4.0	10	20.2	-19.1	5.10	AV29.5 @ 30	24.4	V, H/0-360°
No emissions detected									
Measurement uncertainty			4 dB						

Remark: *¹ Noise level of the measuring instrument ≤ 4.0dBμV @ 10m distance (0.009 MHz – 30 MHz)

Remark: * Peak Limit according to Section 15.35 (b).

The equipment meets the requirements	Yes	No	No
--------------------------------------	------------	-----------	-----------

Further test results are attached	Yes	No	Page no.
-----------------------------------	------------	-----------	----------

EUT: ID MAX50.10-SRE
FCC ID: PJMCPR5010
Date of issue: 2009-09-22

For all emission other than harmonic spurious emissions

TRANSMITTER SPURIOUS RADIATION ABOVE 30 MHz (Section 15.205, 15.209)

f (MHz)	Bandwidth (kHz) Type of detector	Noted receiver level dBμV	Test distance m	Correction factor dB	Distance extrapol. factor dB	AV Correction factor dB	Level corrected dBμV/m	Limit dBμV/m	Margin dBμV/m	Polaris. EUT / antenna	Antenna height cm
30.0000	100, AV	≤ 3.5	3	-2.60	0	0	0.90	40.00	39.10	H,V/H,V	100-400
88.0000	100, AV	≤ 3.5	3	-10.80	0	0	-7.30	40.00	47.30	H,V/H,V	100-400
216.0000	100, AV	≤ 3.5	3	-10.30	0	0	-6.80	43.50	50.30	H,V/H,V	100-400
960.0000	100, AV	≤ 3.5	3	8.50	0	0	12.00	43.50	31.50	H,V/H,V	100-400
1700.0000	1000, AV	≤ 4.5	3	3.80	0	0	8.30	54.00	45.70	H,V/H,V	100-400
2250.0000	1000, AV	≤ 10	3	8.00	0	0	18.00	54.00	36.00	H,V/H,V	100-400
4000.0000	1000, AV	≤ 10	3	8.40* ⁶	0	0	18.40	54.00	35.60	H,V/H,V	100-400
5000.0000	1000, AV	≤ 10	3	9.10* ⁶	0	0	19.40	54.00	34.60	H,V/H,V	100-400
7500.0000	1000, AV	≤ 14	3	12.9* ⁶	0	0	26.90	54.00	27.10	H,V/H,V	100-400
8300.0000	1000, AV	≤ 14	3	14.80* ⁶	0	0	28.80	54.00	25.20	H,V/H,V	100-400
9400.0000	1000, AV	≤ 14	3	16.00* ⁶	0	0	30.00	54.00	24.00	H,V/H,V	100-400
11000.0000	1000, AV	≤ 14	3	18.25* ⁶	0	0	32.25	54.00	21.75	H,V/H,V	100-400
No emissions detected											
Measurement uncertainty			4 dB								

Bandwidth = the measuring receiver bandwidth

- Remark: *¹ noise floor noise level of the measuring instrument ≤ 3.5dBμV @ 3m distance (30 – 1,000 MHz)
 Remark: *² noise floor noise level of the measuring instrument ≤ 4.5dBμV @ 3m distance (1,000 – 2,000 MHz)
 Remark: *³ noise floor noise level of the measuring instrument ≤ 10dBμV @ 3m distance (2,000 – 5,500 MHz)
 Remark: *⁴ noise floor noise level of the measuring instrument ≤ 14dBμV @ 3m distance (5,500 – 14,500 MHz)
 Remark: *⁵ for using a pre-amplifier in the range between 100 kHz and 1,000 MHz
 Remark: *⁶ for using a pre-amplifier in the range between 1.0 GHz and 18.0 GHz

The equipment meets the requirements	Yes	No	No
--------------------------------------	-----	----	----

Further test results are attached	Yes	No	Page no.
-----------------------------------	-----	----	----------

EUT: ID MAX50.10-SRE
FCC ID: PJMCPR5010
Date of issue: 2009-09-22**INTENTIONAL RADIATOR SPURIOUS RADIATION (Section 15.225(a)(d), 15.209)**

f (MHz)	Bandwidth (kHz), Type of detector	Noted receiver level dBμV	Test distance m	Correction factor dB	Distance extrapol. factor dB	Level corrected dBμV/m	Limit dBμV/m @ meter	Margin dBμV/m	orientation EUT / antenna polarisation height/cm	
13.560	QPK/9kHz	22.5	10	20.2	-19.1	23.6	84.0 @ 30	27.4	V,0° / 90°	
27.120	QPK/9kHz	< 4.0	10	20.2	-19.1	5.1	29.5 @ 30	24.4	V,0° / 90°	
40.680	QPK/120kHz	< 6.5	3	-7.0	0	-1.5	40.0 @ 3	41.5	V,H/V,H	100-400
54.240	QPK/120kHz	< 6.5	3	-12.5	0	-6.0	40.0 @ 3	46.0	V,H/V,H	100-400
67.800	QPK/120kHz	< 6.5	3	-13.2	0	-6.7	40.0 @ 3	46.7	V,H/V,H	100-400
81.360	QPK/120kHz	< 6.5	3	-12.0	0	-5.5	40.0 @ 3	45.5	V,H/V,H	100-400
94.920	QPK/120kHz	< 6.5	3	-9.5	0	-3.0	43.5 @ 3	46.5	V,H/V,H	100-400
108.480	QPK/120kHz	< 6.5	3	-8.0	0	-1.5	43.5 @ 3	45.0	V,H/V,H	100-400
122.040	QPK/120kHz	< 6.5	3	-7.4	0	-0.9	43.5 @ 3	44.4	V,H/V,H	100-400
135.600	QPK/120kHz	< 6.5	3	-7.5	0	-1.0	43.5 @ 3	44.5	V,H/V,H	100-400
149.160	QPK/120kHz	< 6.5	3	-7.6	0	-1.1	43.5 @ 3	44.6	V,H/V,H	100-400
162.720	QPK/120kHz	40.1	3	-6.1	0	36.0	46.0 @ 3	10.0	V / V	147
176.280	QPK/120kHz	43.3	3	-7.9	0	35.4	46.0 @ 3	10.6	V / H	117
189.840	QPK/120kHz	40.3	3	-9.4	0	30.9	46.0 @ 3	15.1	V / V	100
203.400	QPK/120kHz	51.6	3	-9.8	0	41.8	46.0 @ 3	4.2	V / V	100
216.960	QPK/120kHz	51.8	3	-8.3	0	43.5	46.0 @ 3	2.5	V / V	104
230.520	QPK/120kHz	51.2	3	-8.0	0	43.2	46.0 @ 3	2.8	V / H	104
Measurement uncertainty			4 dB							

Blue marked: restricted bands

Remark: *¹ noise floor noise level of the measuring instrument ≤ 4.0dBμV @ 10m distance (0.009 – 30 MHz)
 Remark: *² noise floor noise level of the measuring instrument ≤ 6.5dBμV @ 3m distance (30 – 1,000 MHz)
 Remark: *³ noise floor noise level of the measuring instrument ≤ 10 dBμV @ 3m distance (1,000 – 2,000 MHz)
 Remark: *⁴ noise floor noise level of the measuring instrument ≤ 17 dBμV @ 3m distance (2,000 – 5,500 MHz)
 Remark: *⁵ for using a pre-amplifier in the range between 100 kHz and 1,000 MHz

The equipment meets the requirements	yes	no	n.a.
--------------------------------------	-----	----	------

Further test results are attached	yes	no	page no:
-----------------------------------	-----	----	----------

n.a.^x see page no. 23

EUT: ID MAX50.10-SRE
 FCC ID: PJMCPR5010

Date of issue: 2009-09-22

INTENTIONAL RADIATOR SPURIOUS RADIATION (Section 15.225(a)(d), 15.209)

f (MHz)	Bandwidth (kHz), Type of detector	Noted receiver level dBμV	Test distance m	Correction factor dB	Distance extrapol. factor dB	Level corrected dBμV/m	Limit dBμV/m @ meter	Margin dBμV/m	Polaris. EUT / antenna orientation height/cm	
244.080	QPK/120kHz	44.4	3	-8.2	0	36.2	46.0 @ 3	9.8	V,H/V,H	104
257.640	QPK/120kHz	48.4	3	-8.1	0	40.3	46.0 @ 3	5.7	V / V	100
271.200	QPK/120kHz	41.7	3	-7.7	0	34.0	46.0 @ 3	12.0	V / V	170
284.760	QPK/120kHz	50.2	3	-7.4	0	42.8	46.0 @ 3	3.2	V / V	177
298.320	QPK/120kHz	49.9	3	-6.1	0	43.8	46.0 @ 3	2.2	V / V	138
311.880	QPK/120kHz	49.2	3	-5.9	0	43.3	46.0 @ 3	2.7	V / V	131
325.440	QPK/120kHz	43.5	3	-5.4	0	38.1	46.0 @ 3	7.9	V / V	117
339.000	QPK/120kHz	48.6	3	-5.0	0	43.6	46.0 @ 3	2.4	V / V	116
352.560	QPK/120kHz	42.6	3	-4.4	0	38.2	46.0 @ 3	7.8	V / V	115
366.120	QPK/120kHz	43.1	3	-3.9	0	39.2	46.0 @ 3	6.8	V / V	109
379.680	QPK/120kHz	36.6	3	-3.6	0	33.0	46.0 @ 3	13.0	V / V	112
393.240	QPK/120kHz	43.1	3	-2.6	0	40.5	46.0 @ 3	5.5	V / H	107
406.800	QPK/120kHz	33.6	3	-2.5	0	31.1	46.0 @ 3	14.9	V / V	108
Measurement uncertainty			4 dB							

Blue marked: restricted bands

Remark: *¹ noise floor noise level of the measuring instrument $\leq 4.0\text{dB}\mu\text{V}$ @ 10m distance (0.009 – 30 MHz)
 Remark: *² noise floor noise level of the measuring instrument $\leq 6.5\text{dB}\mu\text{V}$ @ 3m distance (30 – 1,000 MHz)
 Remark: *³ noise floor noise level of the measuring instrument $\leq 10\text{dB}\mu\text{V}$ @ 3m distance (1,000 – 2,000 MHz)
 Remark: *⁴ noise floor noise level of the measuring instrument $\leq 17\text{dB}\mu\text{V}$ @ 3m distance (2,000 – 5,500 MHz)
 Remark: *⁵ for using a pre-amplifier in the range between 100 kHz and 1,000 MHz

The equipment meets the requirements	yes	no	n.a.
--------------------------------------	-----	----	------

Further test results are attached	yes	no	page no:
-----------------------------------	-----	----	----------



n.a.^x see page no. 23

EUT: ID MAX50.10-SRE
FCC ID: PJMCPR5010

Date of issue: 2009-09-22

INTENTIONAL RADIATOR SPURIOUS RADIATION (Section 15.225(b)(c))

f (MHz)	Bandwidth (kHz), Type of detector	Noted receiver level dBμV	Test distance m	Correction factor dB	Distance extrapol. factor dB	Level corrected dBμV/m	Limit dBμV/m @ meter	Margin dBμV/m	Polaris. EUT / antenna orientation height/cm
13.13490	QPK/9kHz	-40.2	30	20.2	0	-20.0	40.5 @ 30	60.5	V 0°, 90°/100
13.34840	QPK/9kHz	-30.4	30	20.2	0	-10.2	40.5 @ 30	50.7	V 0°, 90°/100
13.42630	QPK/9kHz	-28.5	30	20.2	0	-8.3	40.5 @ 30	48.8	V 0°, 90°/100
13.48220	QPK/9kHz	-26.7	30	20.2	0	-6.5	50.5 @ 30	57.0	V 0°, 90°/100
13.63780	QPK/9kHz	-26.6	30	20.2	0	-6.4	50.5 @ 30	56.9	V 0°, 90°/100
13.69370	QPK/9kHz	-28.3	30	20.2	0	-8.1	40.5 @ 30	48.6	V 0°, 90°/100
13.77360	QPK/9kHz	-29.8	30	20.2	0	-9.6	40.5 @ 30	50.1	V 0°, 90°/100
13.98510	QPK/9kHz	-40.7	30	20.2	0	-20.5	40.5 @ 30	61.0	V 0°, 90°/100
Measurement uncertainty			4 dB						

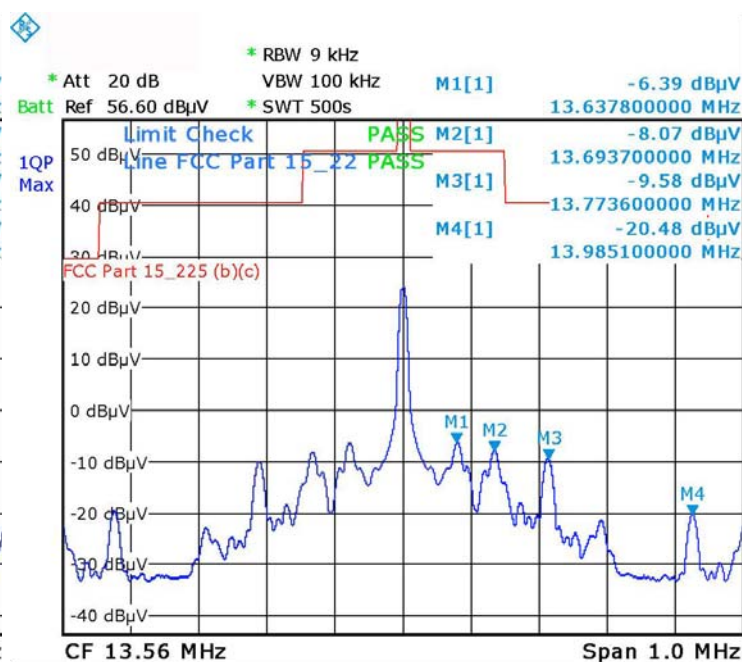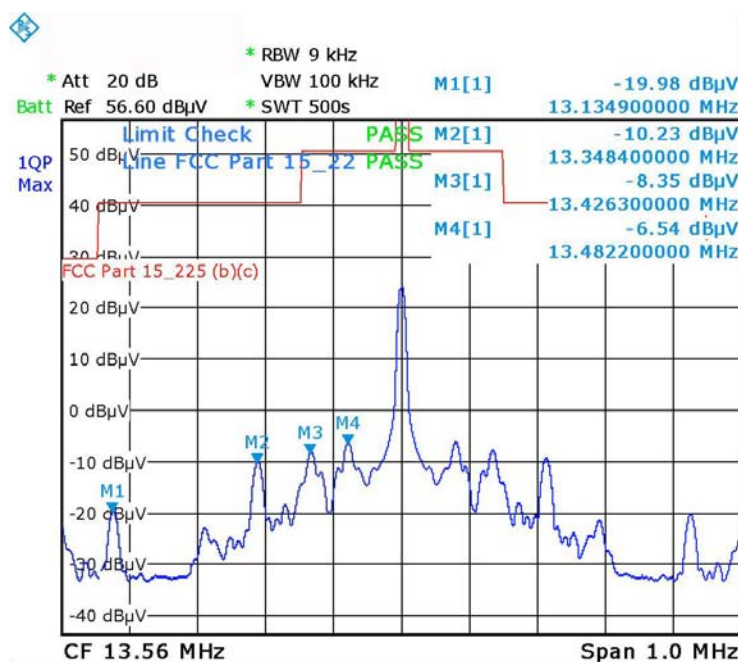

The equipment meets the requirements

yes

~~no~~~~n.a.~~

Further test results are attached

~~yes~~

no

page no:

n.a^x see page no. 23

EUT: ID MAX50.10-SRE
FCC ID: PJMCPR5010

Date of issue: 2009-09-22

11.4 Frequency tolerance

11.4.1 Regulation

Test Requirement: FCC CFR47, Part 15C Test Procedure: ANSI C63.4:2003

15.225 (e) Operation within the band 13.553-13.567 MHz

11.4.2 Test equipment

Type	Manufacturer/ Model no.	Serial no.	Last calibration	Next calibration
Receiver (9 kHz –18.0 GHz)	Rohde & Schwarz Spectrum Analyzer FSL 18 (171a)	100.117	2008/10	2010/10
Low noise signal generator (10kHz – 5.4GHz)	Marconi Instruments 2042 (6)	119347/003	2008/06	2010/06
Test probe	EMCO 7405-901 (41)	1408	2008/01	2010/01

11.4.3 Test procedures

The frequency tolerance of the carrier signal shall be maintained within ± 0.01 % of the operating frequency over a temperature variation of -20 °C to +55 °C at normal supply voltage, and for a variation in the primary supply voltage from 85 % to 115 % of the rated supply voltage at a temperature of 20 °C.

EUT: ID MAX50.10-SRE
FCC ID: PJMCPR5010

Date of issue: 2009-09-22

11.4.4 Result

Carrier Frequency 13.560 MHz

INTENTIONAL RADIATOR Frequency tolerance (Section 15.225(e))				
Test conditions		Frequency measured MHz	Frequency error	
			kHz	%
T _{min} -20 °C	V _{min} 102 V AC	13.55994	-0.06	0.0004
	V _{max} 135 V AC	13.55994	-0.06	0.0004
T _{min} -10 °C	V _{min} 102 V AC	13.55993	-0.07	0.0005
	V _{max} 135 V AC	13.55993	-0.07	0.0005
T _{min} 0 °C	V _{min} 102 V AC	13.55991	-0.09	0.0007
	V _{max} 135 V AC	13.55991	-0.09	0.0007
T _{min} +10 °C	V _{min} 102 V AC	13.55990	-0.10	0.0007
	V _{max} 135 V AC	13.55990	-0.10	0.0007
T _{min} +20 °C	V _{min} 102 V AC	13.55990	-0.10	0.0007
	V _{max} 135 V AC	13.55990	-0.10	0.0007
T _{min} +30 °C	V _{min} 102 V AC	13.55990	-0.10	0.0007
	V _{max} 135 V AC	13.55990	-0.10	0.0007
T _{min} +40 °C	V _{min} 102 V AC	13.55990	-0.10	0.0007
	V _{max} 135 V AC	13.55990	-0.10	0.0007
T _{min} +50 °C	V _{min} 102 V AC	13.55990	-0.10	0.0007
	V _{max} 135 V AC	13.55990	-0.10	0.0007
Maximum frequency error (kHz)			0.1	0.0007
Measurement uncertainty		$\pm 5 \cdot 10^{-8}$		

Limit	
$\pm 0.01 \%$	1.356 kHz

The equipment meets the requirements	yes	no	n.a.
--------------------------------------	-----	---------------	-----------------

Further test results are attached	yes	no	page no:
-----------------------------------	-----	----	----------

n.a.^x see page no. 23

EUT: ID MAX50.10-SRE
FCC ID: PJMCPR5010**Date of issue: 2009-09-22**

11.5 Conducted limits

11.5.1 Regulation

Section 15.207 (a) For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50ohms line impedance stabilization network (LISN). Compliance with this provision of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission(MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.50	66 to 56*	56 to 46*
0.50-5.0	56	46
5.0-30.0	60	50

* Decreases with the logarithm of the frequency

Section 15.207 (c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provision for, the use of battery chargers which permit operating while charging, AC adaptors or battery eliminators or connected to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

EUT: ID MAX50.10-SRE
FCC ID: PJMCPR5010**Date of issue: 2009-09-22****10.5.2 Test equipment**

Type	Manufacturer/ Model no.	Serial no.	Last calibration	Next calibration	Remarks
Receiver (9 kHz - 30MHz)	Schwarzbeck FMLK 1518 (428)	1518-294	06 / 2009	06 / 2011	---
Protector limiter 9 kHz - 30MHz, 10 dB	Rhode & Schwarz ESH 3Z2 (272)	357,881052	03 / 2008	03 / 2010	---
V-LISN 50 ohms/(50 uH+5 ohms)	RFT NNB 11 (72)	13835240	03 / 2007	03 / 2010	---
V-LISN 50 ohms/(50 uH+5 ohms)	emco 3810/2 LISN (49b)	---	03 / 2007	03 / 2010	---

10.5.3 Test procedures

The EUT and the additional equipment (if required) are connected to the main power through a line impedance stabilization network (LISN). The LISN must be appropriate to ANSI C63.4: 2003 Section 7.

Additional equipment must also be connected to a second LISN with the same specifications described in the above sentence (if required).

EUT: ID MAX50.10-SRE
 FCC ID: PJMCPR5010

Date of issue: 2009-09-22

11.5.4 Test results

1.) External AC/DC power supply with ohmic resistance

TRANSMITTER CONDUCTED EMISSIONS (Section 15.207)						
Tested line	Emission frequency [MHz]	Receiver bandwidth [kHz]	Result quasi-peak [dB μ V]	Spec. limit (average) [dB μ V]	Margin [dB]	Remarks
L1	0.180	9	-2	54.6	56.6	* ¹
N	0.180	9	-2	54.6	56.6	* ¹
L1	0.394	9	37.5	47.7	10.2	* ²
N	0.394	9	38.0	47.7	9.3	* ²
L1	0.461	9	38.5	46.7	8.2	* ²
N	0.461	9	39.5	46.7	7.2	* ²
L1	0.600	9	-2	46	48.0	* ¹
N	0.600	9	-2	46	48.0	* ¹
L1	0.775	9	-2	46	48.0	* ¹
N	0.775	9	-2	46	48.0	* ¹
L1	0.850	9	-2	46	48.0	* ¹
N	0.850	9	-2	46	48.0	* ¹
L1	1.000	9	-2	46	48.0	* ¹
N	1.000	9	-2	46	48.0	* ¹
L1	1.575	9	35.0	46	11.0	* ²
N	1.575	9	35.0	46	11.0	* ²
L1	2.429	9	31.5	46	14.5	* ²
N	2.429	9	32.5	46	13.5	* ²
L1	3.546	9	34.0	46	12.0	* ²
N	3.546	9	34.0	46	12.0	* ²
L1	4.791	9	38.0	46	8.0	* ²
N	4.791	9	38.5	46	7.5	* ²
L1	5.252	9	40.0	46	6.0	* ²
N	5.252	9	41.0	46	5.0	* ²
L1	6.302	9	41.5	50	8.5	* ²
N	6.302	9	42.0	50	8.0	* ²
L1	11.096	9	32.0	50	18.0	* ²
N	11.096	9	32.0	50	18.0	* ²
L1	20.293	9	-2	50	52.0	* ¹
N	20.293	9	-2	50	52.0	* ¹
L1	27.058	9	-2	50	52.0	* ¹
N	27.058	9	-2	50	52.0	* ¹

Remark: *¹ Noise level of the measuring instrument $\leq -2\text{dB}\mu\text{V}$ (0.009 – 30MHz)

Remark: *² Quasi peak measurements lower than "Specified Average Limit"

The equipment meets the requirements	yes	no	na
--------------------------------------	-----	----	----

Further test results are attached	yes	no	page no:
-----------------------------------	-----	----	----------

EUT: ID MAX50.10-SRE
 FCC ID: PJMCPR5010

Date of issue: 2009-09-22

2.) External AC/DC power supply with connected ID CPR5010

TRANSMITTER CONDUCTED EMISSIONS (Section 15.207)						
Tested line	Emission frequency [MHz]	Receiver bandwidth [kHz]	Result quasi-peak [dBμV]	Spec. limit (average) [dBμV]	Margin [dB]	Remarks
L1	0.180	9	-2	54.6	56.6	* ¹
N	0.180	9	-2	54.6	56.6	* ¹
L1	0.394	9	43.0	47.7	4.7	* ²
N	0.394	9	43.0	47.7	4.7	* ²
L1	0.461	9	42.5	46.7	4.2	* ²
N	0.461	9	43.0	46.7	3.7	* ²
L1	0.600	9	-2	46	48.0	* ¹
N	0.600	9	-2	46	48.0	* ¹
L1	0.775	9	-2	46	48.0	* ¹
N	0.775	9	-2	46	48.0	* ¹
L1	0.850	9	-2	46	48.0	* ¹
N	0.850	9	-2	46	48.0	* ¹
L1	1.000	9	-2	46	48.0	* ¹
N	1.000	9	-2	46	48.0	* ¹
L1	1.575	9	37.0	46	9.0	* ²
N	1.575	9	38.0	46	8.0	* ²
L1	2.429	9	34.5	46	11.5	* ²
N	2.429	9	35.0	46	11.0	* ²
L1	3.546	9	36.5	46	9.5	* ²
N	3.546	9	36.0	46	10.0	* ²
L1	4.791	9	39.5	46	6.5	* ²
N	4.791	9	39.5	46	6.5	* ²
L1	5.252	9	41.5	46	4.5	* ²
N	5.252	9	42.0	46	4.0	* ²
L1	6.302	9	44.5	50	5.5	* ²
N	6.302	9	44.5	50	5.5	* ²
L1	11.096	9	28.5	50	21.5	* ²
N	11.096	9	29.0	50	21.0	* ²
L1	20.293	9	-2	50	52.0	* ¹
N	20.293	9	-2	50	52.0	* ¹
L1	27.122	9	42.0	50	8.0	* ²
N	27.122	9	43.5	50	6.5	* ²

Remark: *¹ Noise level of the measuring instrument ≤ -2dBμV (0.009 – 30MHz)Remark: *² Quasi peak measurements lower than “Specified Average Limit”

The equipment meets the requirements	yes	no	na
--------------------------------------	-----	---------------	---------------

Further test results are attached	yes	no	page no:
-----------------------------------	-----	----	----------

EUT: ID MAX50.10-SRE
FCC ID: PJMCPR5010

Date of issue: 2009-09-22

12 Additional information to this test report

Remarks

- n.a.¹ not applicable, because antenna is part of the PCB
- n.a.² not applicable, because EUT is directly battery powered

EUT: ID MAX50.10-SRE
FCC ID: PJMCPR5010

Date of issue: 2009-09-22

End of test report