

EUT: UHF Long Range Reader ID ISC.LRU 3500
FCC ID: PJMLRU3000

Date of issue: 2010-01-19



Test Report
acc. to the relevant standard
47 CFR Part 15 C – Intentional Radiators
47 CFR Part 15 B – Unintentional Radiators
Measurement Procedure:
ANSI C63.4 - 2003
relating to
Feig Electronic GmbH
UHF Long Range Reader ID ISC.LRU 3500
Variant:
UHF Long Range Reader ID ISC.LRU 3000

Measurement of Radio- Noise Emissions
from Low- Voltage Electrical and Electronic Equipment
Technical characteristics and test methods for radio equipment
in the frequency range 9 kHz to 40 GHz

EUT: UHF Long Range Reader ID ISC.LRU 3500
FCC ID: PJMLRU3000

Date of issue: 2010-01-19

Manufacturer's details	
Manufacturer	FEIG ELECTRONIC GmbH
Manufacturer's grantee code	PJM
Manufacturer's address	FEIG ELECTRONIC GmbH
	Lange Str. 4
	35781 Weilburg
	Tel.: +49 (0) 6471 31 09 968
	Fax :+49 (0) 6471 31 09 99
	Contact person: Andreas Wennrich
	Email: andreas.wennrich@feig.de
Relevant standard used	47 CFR Part 15C - Intentional Radiators
	ANSI C63.4-2003

Test Report prepared by	
Technical engineer	Ralf Trepper
	m.dudde hochfrequenz-technik (laboratory)
	Rottland 5a
	51429 Bergisch Gladbach
	Germany
	Phone: +49 2207 96890
	Fax: +49 2207 968920
	E-mail: m.dudde@labor.dudde.com

Equipment Under Test (EUT)	
Equipment category	FHSS Transceiver
Trade name	FEIG
Type designation	UHF Long Range Reader ID ISC.LRU3500
Serial no.	---
Variants	UHF Long Range Reader ID ISC.LRU3000

EUT: UHF Long Range Reader ID ISC.LRU 3500
 FCC ID: PJMLRU3000

Date of issue: 2010-01-19

1. Test results

CFR Section	Report Chapter	Requirements Headline	Test result		
			pass	fail	not
15.203	11.1	Antenna requirement	pass	fail	not
15.205(a)	11.2	Operation in the restricted bands	pass	fail	not
15.209(a)	11.3	Radiated emissions	pass	fail	not
15.247(a)(1)(i)	11.4	Channel occupancy / bandwidth	pass	fail	not
15.247(b)(2)	11.5	Peak output power	pass	fail	not
15.247(d)	11.6	Out of band emissions	pass	fail	not
15.247(i)	11.7	Radio frequency hazard	pass	fail	not
15.207	11.8	Conducted limits	pass	fail	not

Test requirements kept	yes	no
-------------------------------	-----	---------------

Signature
 (Technical engineer)


 Ralf Trepper

Signature
 (Manager)


 Manfred Dudde

EUT: UHF Long Range Reader ID ISC.LRU 3500
FCC ID: PJMLRU3000

Date of issue: 2010-01-19

List of contents

Page

1. Test results	3
2. Test laboratory	6
3. Introduction	6
4. Product	7
5. Test schedule	7
6. Product and measurement documentation	8
7. Observations and comments	8
8. Summary	8
9. Conclusions	9
10. Operation description	10
11.1 Antenna requirement	11
11.1.1 Regulation	11
11.1.2 Result	11
11.2 Operation in the restricted bands	12
11.2.1 Regulation	12
11.2.2 Result	14
11.3 Radiated emissions	15
11.3.1 Regulation	15
11.3.2 Test equipment	16
11.3.3 Test procedures	17
11.3.4 Calculation of field strength Section 15.209 below 30 MHz	17
11.3.5 Calculation of field strength Section 15.209 above 30 MHz	18
11.3.6 Calculation of average correction factor	18
11.3.7 Calculation of the field strength Section 15.247	19
11.3.8 Result	20
11.4 Channel occupancy / bandwidth	26
11.4.1 Regulation	26
11.4.2 Test equipment	26
11.4.3 Test procedures	26
11.4.4 Result	26
11.5 Peak output power	27
11.5.1 Regulation	27
11.5.2 Test equipment	27
11.5.3 Test procedures	27
11.5.4 Calculation of the radiated power	28
11.5.5 Result	29
11.6 Out of band emissions	33
11.6.1 Regulation	33
11.6.2 Test equipment	33
11.6.3 Test procedures	34
11.6.4 Calculation of the radiated power	34

EUT: UHF Long Range Reader ID ISC.LRU 3500
FCC ID: PJMLRU3000

Date of issue: 2010-01-19

11.6.5 Result.....	35
11.6.5 Result.....	44
11.7 Radio frequency hazard.....	45
11.7.1 Regulation	45
11.7.2 Result.....	45
11.8 Conducted limits.....	46
11.8.1 Regulation	46
10.8.2 Test equipment	47
10.8.3 Test procedures	47
11.8.4 Test results	48
12. Additional information to the test report.....	51

EUT: UHF Long Range Reader ID ISC.LRU 3500
FCC ID: PJMLRU3000**Date of issue: 2010-01-19**

2. Test laboratory

Company name : m.dudde hochfrequenz-technik
Street : Rottland 5a
City : 51429 Bergisch Gladbach
Country : Germany
Laboratory : FCC Registration Number: 699717
This site has been fully described in a report submitted to the FCC, and renewed with letter dated July 12, 2005, Registration Number 699717.
Phone : +49-2207-9689-0
Fax : +49-2207-9689-20
E-Mail : manfred.dudde@t-online.de
Web : <http://www.dudde.com>

3. Introduction

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of m. dudde hochfrequenz - technik.

This report contains the result of tests performed by m. dudde hochfrequenz - technik for the purpose of a type approval. The order for carrying out these tests has been placed by:

Manufacturer

Company name : FEIG ELECTRONIC GmbH
Address : Lange Str. 4
35781 Weilburg
Country : Germany
Telephone : +49 (0) 6471 31 09 968
Fax : +49 (0) 6471 31 09 99
Email : andreas.wennrich@feig.de
Date of order : 2009-08-21
References : Mr. Wennrich

EUT: UHF Long Range Reader ID ISC.LRU 3500
FCC ID: PJMLRU3000**Date of issue: 2010-01-19**

4. Product

Samples of the following apparatus were submitted for testing:

Type of equipment	: FHSS Transceiver (UHF RFID Reader)
Manufacturer	: FEIG ELECTRONIC GmbH
Trademark	: FEIG
Type designation	: UHF Long Range Reader ID ISC.LRU3000
Hardware version	: UHF Long Range Reader ID ISC.LRU3500
Serial number	: none, Prototype
Software release	: ---
Power used	: 48.0 V DC (PoE, IEEE802.3at*, Class4) / 24.0 V DC (VCC)
Frequency used	: 902.700 MHz – 927.200 MHz (50 channels with 500 kHz channel spacing)
Generated or used frequencies	: 902.700 MHz – 927.200 MHz (Carrier) 18.432 MHz, 20.0 MHz, 20.0 MHz, 25.0 MHz, 81.92 MHz (Crystals, UHF Long Range Reader ID ISC.LRU3500) 18.432 MHz, 20.0 MHz, 25.0 MHz, 81.92 MHz (Crystals, UHF Long Range Reader ID ISC.LRU3000)
FCC ID	: PJMLRU3000

5. Test schedule

The tests were carried out in accordance with the specifications detailed in chapter 7 “Summary“ of this report at:

- m. dudde hochfrequenz - technik, D-51429 Bergisch Gladbach

The test sample was received on:

- 2009-09-09

The tests were carried out in the following period of time:

- 2009-10-09 - 2009-12-17

EUT: UHF Long Range Reader ID ISC.LRU 3500
FCC ID: PJMLRU3000

Date of issue: 2010-01-19

6. Product and measurement documentation

For issuing this report the following product documentation was used and the following annexes were created:

Description	Date	Identifications
External photographs of the Equipment Under Test (EUT)	2010-01-19	Annex no. 1
Internal photographs of the Equipment Under Test (EUT)	2010-01-19	Annex no. 2
bandwidth	2010-01-19	Annex no. 3
FCC ID label sample	2010-01-19	Annex no. 4
Functional description	2010-01-19	Annex no. 5
Test setup photos	2010-01-19	Annex no. 6
Block diagram	2010-01-19	Annex no. 7
Schematics	2010-01-19	Annex no. 8
Parts list	2010-01-19	Annex no. 9
Operational description	2010-01-19	Annex no. 10
Channel occupancy	2010-01-19	Annex no. 11
Antenna description	2010-01-19	Annex no. 12

The above mentioned documentation will be filed at m. dudde hochfrequenz - technik for a period of 10 years following the issue of this report.

7. Observations and comments

There are two versions. ID ISC.LRU3500-FCC is the full featured version. On ID ISC.LRU3000-FCC there is no PoE and only one Synthesizer.

Additional equipment for the tests to carry on the ST110 and PR110:

HP Laptop,
Type: compaq nx6325
SN : CNU64907YN

PoE Switching adapter,
Model : SL POWER ELECTRONICS
PW183RD48000F07 (UL: 2L85 / E136791)
Input: 110-250 V AC / 50-60 Hz / 1.0 A max.
Output: +48 V DC / 0.625 A / 30 W max.

8. Summary

The product is intended for the use in the following areas of application:

Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the frequency range of 9 kHz to 40 GHz

The samples were tested according to the following specification:

47 CFR Part 15 – Intentional Radiators, ANSI C63.4 - 2003

EUT: UHF Long Range Reader ID ISC.LRU 3500
FCC ID: PJMLRU3000**Date of issue: 2010-01-19**

9. Conclusions

Samples of the apparatus were found to **CONFORM WITH** the specifications stated in chapter 7 "Summary" of this report.

In the opinion of m. dudde hochfrequenz - technik, the samples satisfied all applicable requirements relating to the network interface types specified in chapter 7 "Summary".

The results of the type tests as stated in this report are exclusively applicable to the product item as identified in this report. m. dudde hochfrequenz - technik does not accept any responsibility for the results stated in this report, with respect to the properties of product items not involved in these tests.

This report consists of a main module, modules with test results and annexes listed in chapter 5: "Product documentation". All pages have been numbered consecutively and bear the m. dudde hochfrequenz - technik logo, the report number and sub numbers.

The total number of pages in this report is **52**.

Tester:

Date : 2010-01-19

Name : Ralf Trepper

Signature : 

Technical responsibility for area of testing:

Date : 2010-01-19

Name : Manfred Dudde

Signature : 

EUT: UHF Long Range Reader ID ISC.LRU 3500
FCC ID: PJMLRU3000

Date of issue: 2010-01-19

10. Operation description

10.1 EUT details

The ID ISC.LRU3500 and ID ISC.LRU3000 RFID-Readers are long range readers (up to 10 m respectively 8 m), operating at UHF (902-928 MHz), in a Frequency Hopping Mode. The readers have a RF output level of 1 W. The readers can be supplied with 24 VDC. They contain different interfaces, for example RS485, USB and Ethernet (PoE (ID ISCLR3500 only)), as well as digital I/O's, relays and LEDs for status indication. The ID ISC.LRU3500/3000 contains a LINUX operating system.

The system is capable of using channels which are separated by a frequency spacing of 500kHz, starting at a centre frequency of 902.7 MHz (channel 1).

The transmitter and receiver parts each have a hop time (time for switching from one hopping channel to the next), determined by the settling time of the on-chip frequency synthesizer.

Of all available channels are used for TX hopping.

During each transmission all hopping channels (1-50) are used. Thereby it is inherently ensured that the hopping channels are used equally often for TX.

The sequence of hopping channels during a transmission and exact timing for TX on each hopping channel is determined by a pseudo-random algorithm.

10.2 EUT configuration

Testing was carried out using software control implemented in the EUT with the following settings:

- Output power: maximum, +30 dBm
- Frequency hopping in the band: 902 – 928 MHz
- Frequency hopping using a pseudo random sequence in the band: 902 – 928 MHz.
- Changes in modulation: None,
- Single frequency operation
- Channel spacing: 500 kHz
- 50 Channels

10.3 EUT measurement description

Radiated emission test

One configuration will be tested as stand alone device. In order to establish the maximum radiation, firstly, there have been viewed all orthogonal adjustments and all four antenna ports of the test sample. Secondly the test sample have been rotated at all adjustments around the own axis between 0° and 360°, and thirdly, the antenna polarization between horizontal and vertical has been varied. All generated frequencies, the lowest, middle and the highest frequency of the **UHF Long Range Reader ID ISC.LRU 3500**, have been viewed.

Conducted measurements

The **UHF Long Range Reader ID ISC.LRU 3500** was first connected over an USB cable to the USB port from an Laptop and this to the artificial mains network and secondly over an serial cable to the serial port from an Laptop and this to the artificial mains network. Additional the **UHF Long Range Reader ID ISC.LRU 3500** was connected via external power supply (PoE) to the artificial mains network. It has been tested only in continuous transmit mode. L1 and N have been viewed.

EUT: UHF Long Range Reader ID ISC.LRU 3500
 FCC ID: PJMLRU3000

Date of issue: 2010-01-19

11.1 Antenna requirement

11.1.1 Regulation

15.203 An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of Part 15C. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31 (d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

11.1.2 Result

The equipment meets the requirements	yes	no	not
Further test results are attached	yes	no	page no:

To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (EIRP) is not more than that permitted for successful communication. This device has been designed to operate with the antennas listed below, and having a maximum gain of 10.5 dBic. Antennas not included in this list or having a gain greater than 10.5 dBic are strictly prohibited for use with this device. The required antenna impedance is 50 ohms.

Lists of Antennas:

*ID.ISC.ANT.U250/250-FCC
 ID.ISC.ANT.U170/170-FCC
 ID ISC.ANT.U270/270-FCC
 ID ISC.ANT.U600/270-FCC*

EUT: UHF Long Range Reader ID ISC.LRU 3500
FCC ID: PJMLRU3000

Date of issue: 2010-01-19

11.2 Operation in the restricted bands

11.2.1 Regulation

Section 15.205 Restricted bands of operation

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

(c) Except as provided in paragraphs (d) and (e), regardless of the field strength limits specified elsewhere in this Subpart, the provisions of this Section apply to emissions from any intentional radiator.

(d) The following devices are exempt from the requirements of this Section:

EUT: UHF Long Range Reader ID ISC.LRU 3500
FCC ID: PJMLRU3000**Date of issue: 2010-01-19**

- (1) Swept frequency field disturbance sensors operating between 1.705 and 37 MHz provided their emissions only sweep through the bands listed in paragraph (a), the sweep is never stopped with the fundamental emission within the bands listed in paragraph (a), and the fundamental emission is outside of the bands listed in paragraph (a) more than 99% of the time the device is actively transmitting, without compensation for duty cycle.
- (2) Transmitters used to detect buried electronic markers at 101.4 kHz which are employed by telephone companies.
- (3) Cable locating equipment operated pursuant to Section 15.213.
- (4) Any equipment operated under the provisions of § 15.253, § 15.255 or § 15.257 of this part.
- (5) Biomedical telemetry devices operating under the provisions of Section 15.242 of this part are not subject to the restricted band 608-614 MHz but are subject to compliance within the other restricted bands.
- (6) Transmitters operating under the provisions of Subpart D or F of this part.
- (7) Devices operated pursuant to § 15.225 are exempt from complying with this section for the 13.36-13.41 MHz band only.
- (8) Devices operated in the 24.075-24.175 GHz band under § 15.245 are exempt from complying with the requirements of this section for the 48.15-48.35 GHz and 72.225-72.525 GHz bands only, and shall not exceed the limits specified in § 15.245(b).
- (9) Devices operated in the 24.0-24.25 GHz band under § 15.249 are exempt from complying with the requirements of this section for the 48.0-48.5 GHz and 72.0-72.75 GHz bands only, and shall not exceed the limits specified in § 15.249(a).
- (e) Harmonic emissions appearing in the restricted bands above 17.7 GHz from field disturbance sensors operating under the provisions of Section 15.245 shall not exceed the limits specified in Section 15.245(b).
- (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.
- (c) Except as provided in paragraphs (d) and (e), regardless of the field strength limits specified elsewhere in this Subpart, the provisions of this Section apply to emissions from any intentional radiator. (d) The following devices are exempt from the requirements of this Section:
- (1) Swept frequency field disturbance sensors operating between 1.705 and 37 MHz provided their emissions only sweep through the bands listed in paragraph (a), the sweep is never stopped with the fundamental emission within the bands listed in paragraph (a), and the fundamental emission is outside of the bands listed in paragraph (a) more than 99% of the time the device is actively transmitting, without compensation for duty cycle. (2) Transmitters used to detect buried electronic markers at 101.4 kHz which are employed by telephone companies.
- (3) Cable locating equipment operated pursuant to Section 15.213.

EUT: UHF Long Range Reader ID ISC.LRU 3500
FCC ID: PJMLRU3000

Date of issue: 2010-01-19

- (4) Any equipment operated under the provisions of § 15.253, § 15.255 or § 15.257 of this part.
- (5) Biomedical telemetry devices operating under the provisions of Section 15.242 of this part are not subject to the restricted band 608-614 MHz but are subject to compliance within the other restricted bands.
- (6) Transmitters operating under the provisions of Subpart D or F of this part.
- (7) Devices operated pursuant to § 15.225 are exempt from complying with this section for the 13.36-13.41 MHz band only.
- (8) Devices operated in the 24.075-24.175 GHz band under § 15.245 are exempt from complying with the requirements of this section for the 48.15-48.35 GHz and 72.225-72.525 GHz bands only, and shall not exceed the limits specified in § 15.245(b).
- (9) Devices operated in the 24.0-24.25 GHz band under § 15.249 are exempt from 83 complying with the requirements of this section for the 48.0-48.5 GHz and 72.0-72.75 GHz bands only, and shall not exceed the limits specified in § 15.249(a).
- (e) Harmonic emissions appearing in the restricted bands above 17.7 GHz from field disturbancesensors operating under the provisions of Section 15.245 shall not exceed the limits specified in Section 15.245(b).

11.2.2 Result

The equipment meets the requirements	yes	no	not
Further test results are attached	yes	no	page no: 20-25

EUT: UHF Long Range Reader ID ISC.LRU 3500
FCC ID: PJMLRU3000

Date of issue: 2010-01-19

11.3 Radiated emissions

11.3.1 Regulation

15.209(a)

Section 15.209 Radiated emission limits, general requirements. (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength Measurement (microvolts/meter)	Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

(b) In the emission table above, the tighter limit applies at the band edges.

(c) The level of any unwanted emissions from an intentional radiator operating under these general provisions shall not exceed the level of the fundamental emission. For intentional radiators which operate under the provisions of other Sections within this Part and which are required to reduce their unwanted emissions to the limits specified in this table, the limits in this table are based on the frequency of the unwanted emission and not the fundamental frequency. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.

(d) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

(e) The provisions in Sections 15.31, 15.33, and 15.35 for measuring emissions at distances other than the distances specified in the above table, determining the frequency range over which radiated emissions are to be measured, and limiting peak emissions apply to all devices operated under this Part.

(f) In accordance with Section 15.33(a), in some cases the emissions from an intentional radiator must be measured to beyond the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator because of the incorporation of a digital device. If measurements above the tenth harmonic are so required, the radiated emissions above the tenth harmonic shall comply with the general radiated emission limits applicable to the incorporated digital device, as shown in Section 15.109 and as based on the frequency of the emission being measured, or, except for emissions contained in the restricted frequency bands shown in Section 15.205, the limit on spurious emissions specified for the intentional radiator, whichever is the higher limit. Emissions which must be measured above the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator and which fall within the restricted bands shall comply with the general radiated emission limits in Section 15.109 that are applicable to the incorporated digital device.

EUT: UHF Long Range Reader ID ISC.LRU 3500
FCC ID: PJMLRU3000

Date of issue: 2010-01-19

(g) Perimeter protection systems may operate in the 54-72 MHz and 76-88 MHz bands under the provisions of this section. The use of such perimeter protection systems is limited to industrial, business and commercial applications.

11.3.2 Test equipment

Type	Manufacturer/ Model no.	Serial no.	Last calibration	Next calibration
Receiver (9 kHz –18.0 GHz)	Rohde & Schwarz Spectrum Analyzer FSL 18 (171a)	100.117	2008/10	2010/10
Receiver (9 kHz –40.0 GHz)	Anritsu Spectrum Analyzer MS2668C (359a)	6200163244	2009/04	2011/04
Pre-amplifier (100kHz - 1.3GHz)	Hewlett Packard 8447 E (166a)	1726A00705	2008/02	2010/02
Pre-amplifier (1GHz - 18GHz)	Narda --- (345)	---	2008/02	2010/02
Bilog antenna (30- 1000 MHz)	Schwarzbeck VULP 9168 (406)		2007/02	2013/02
Horn antenna (0.86-8.5 GHz)	Schwarzbeck BBHA 9120 A (284)	236	2008/01	2013/01
Horn antenna (2.0-14.5 GHz)	Schwarzbeck BBHA 9120 C (169)	305	2008/01	2013/01
Horn antenna (14.5-40 GHz)	Schwarzbeck BBHA 9170 (281)	41	2000/01	2010/01
RF- cable	Kabelmetal 18m [N]	K1	2009/01	2010/01
RF- cable	Aircell 0.5m [BNC]	K40	2009/01	2010/01
RF- cable	Aircell 1m [BNC/N]	K56	2009/01	2010/01
RF- cable	Sucoflex 106 Suhner 6,4m [N]	K74	2009/01	2010/01
RF- cable	Sucoflex 106 Suhner 6,4m [N]	K75	2009/01	2010/01

EUT: UHF Long Range Reader ID ISC.LRU 3500
FCC ID: PJMLRU3000

Date of issue: 2010-01-19

11.3.3 Test procedures

The EUT and this peripheral (when additional equipment exists) are placed on a turn table which is 0.8m above the ground. The turn table would be allowed to rotate 360 degrees to determine the position of the maximum emission level. The test distance between the EUT and the receiving antenna are 3 m. To find the maximum emission, the polarization of the receiving antenna are changed in horizontal and vertical polarization, the position of the EUT was changed in different orthogonal determinations.

ANSI C63.4: 2003 Section 8 "Radiated Emissions Testing"

Radiated emissions test characteristics	
Frequency range	0.009 MHz - 10,000 MHz
Test distance	3 m*(for frequencies above 30 MHz)
Test instrumentation resolution bandwidth	9 kHz (0.009 – 30MHz)
	120 kHz (30 MHz - 1,000 MHz)
	1 MHz (1000 MHz - 10,000 MHz)
Receive antenna scan height	1 m (0.009 MHz - 30 MHz)
	1 m - 4 m (30 MHz - 10,000 MHz)
Receive antenna polarization / orientation	0 – 360°
	Vertical / horizontal (30 MHz - 1,000 MHz)

* According to Section 15.31 (f)(1): At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

11.3.4 Calculation of field strength Section 15.209 below 30 MHz

The receiver reading gives not directly the field strength result in (dB μ V/m). The antenna factors of the loop antenna and cable losses must be added to find the correct result.

For frequencies below 30 MHz and for a test distance other than what is specified, but fulfilling the requirements of Section 15.31 (f) (2) the field strength is calculated by adding additionally an extrapolation factor of 40 dB/decade (inverse linear distance for field strength measurements).

The field strength is calculated by the following calculation:

Corrected Level = Receiver Level + Correction Factor

Corrected Level = Receiver Level + Correction Factor – Pre-amplifier (with the use of a pre-amplifier)

Receiver Level : Receiver reading without correction factors

Correction Factor : Loop antenna factor + cable loss

FS = 40.7 - 40 = 0.7 [dB μ V/m]

Level in μ V/m Common Antilogarithm (0.7/20) = 1.1

EUT: UHF Long Range Reader ID ISC.LRU 3500
FCC ID: PJMLRU3000

Date of issue: 2010-01-19

11.3.5 Calculation of field strength Section 15.209 above 30 MHz

The field strength is calculated by the following calculation:

Corrected Level = Receiver Level + Correction Factor (without the use of a pre-amplifier)

Corrected Level = Receiver Level + Correction Factor – Pre-amplifier (with the use of a pre-amplifier)

Receiver Level : Receiver reading without correction factors

Correction Factor : Antenna factor + cable loss

For test distance other than what is specified, but fulfilling the requirements of Section 15.31 (f) (1) the field strength is calculated by adding additionally an extrapolation factor of 20 dB/decade (inverse linear distance for field strength measurements).

11.3.6 Calculation of average correction factor

The average correction factor is computed by analyzing the "worst case" on time in any 100msec time period and using the formula: Corrections Factor + $20 \cdot \log(\text{worst case on time}/100\text{msec})$ Analysis of the remote transmitter worst case on time in any 100msec time period is an on time of 50msec, therefore the correction factor is $20 \cdot \log(50/100) = -6$ dB. The maximum correction factor to be applied is 20 dB per section 15.35 of the FCC rules.

EUT: UHF Long Range Reader ID ISC.LRU 3500
FCC ID: PJMLRU3000

Date of issue: 2010-01-19

11.3.7 Calculation of the field strength Section 15.247

The field strength is calculated by the following calculation:

Corrected Level = Receiver Level + Correction Factor (without the use of a pre-amplifier)

Corrected Level = Receiver Level + Correction Factor – Pre-amplifier (with the use of a pre-amplifier)

Receiver Level : Receiver reading without correction factors

Correction Factor : Antenna factor + cable loss

For example:

The receiver reading is 32.7 dB μ V. The antenna factor for the measured frequency is +2.5 dB (1/m) and the cable factor for the measured frequency is 0.71 dB, giving a field strength of 35.91dB μ V/m.

The 35.91dB μ V/m value can be mathematically converted to its corresponding level in μ V/m.

Level in μ V/m = Common Antilogarithm (35.91/20) = 39.8

For a test distance other than what is specified, but fulfilling the requirements of Section 15.31 (f) (1), the field strength is calculated by adding additionally an extrapolation factor of 20dB/decade (inverse linear distance for field strength measurements).

EUT: UHF Long Range Reader ID ISC.LRU 3500
FCC ID: PJMLRU3000

Date of issue: 2010-01-19

11.3.8 Result

(lowest frequency)(902.700 MHz)

TRANSMITTER SPURIOUS RADIATION BELOW 30 MHz (Section 15.205, 15.209)									
f (MHz)	Bandwidth (kHz) Type of detector	Noted receiver level dB μ V	Test distance m	Correction factor dB	Distance extrapol. factor dB	Level corrected dB μ V/m	Limit dB μ V/m	Margin dB μ V/m	Polarisation EUT / antenna orientation
0.1200	PK/0.2kHz	< 4.0	10	20.2	-59.1	-34.90	Pk46.0- @ 300	80.90	V, H/0-360°
	AV/0.2kHz	< 4.0	10	20.2	-59.1	-34.90	AV26.0 @ 300	80.90	V, H/0-360°
0.5000	AV/0.2kHz	< 4.0	10	20.2	-19.1	5.10	AV33.6 @ 30	28.5	V, H/0-360°
1.5000	AV/0.2kHz	< 4.0	10	20.2	-19.1	5.10	AV24.1 @ 30	19.00	V, H/0-360°
3.0000	AV/9.0kHz	< 4.0	10	20.2	-19.1	5.10	AV29.5 @ 30	24.4	V, H/0-360°
5.0000	AV/9.0kHz	< 4.0	10	20.2	-19.1	5.10	AV29.5 @ 30	24.4	V, H/0-360°
8.0000	AV/9.0kHz	< 4.0	10	20.2	-19.1	5.10	AV29.5 @ 30	24.4	V, H/0-360°
10.0000	AV/9.0kHz	< 4.0	10	20.2	-19.1	5.10	AV29.5 @ 30	24.4	V, H/0-360°
20.0000	AV/9.0kHz	< 4.0	10	20.2	-19.1	5.10	AV29.5 @ 30	24.4	V, H/0-360°
30.0000	AV/9.0kHz	< 4.0	10	20.2	-19.1	5.10	AV29.5 @ 30	24.4	V, H/0-360°
No emissions detected									
Measurement uncertainty			± 4 dB						

Remark: *¹ Noise level of the measuring instrument ≤ 4.0 dB μ V @ 10m distance (0.009 MHz – 30 MHz)

Remark: * Peak Limit according to Section 15.35 (b).

EUT: UHF Long Range Reader ID ISC.LRU 3500
FCC ID: PJMLRU3000

Date of issue: 2010-01-19

(lowest frequency)(902.700 MHz)

worst case

TRANSMITTER SPURIOUS RADIATION ABOVE 30 MHz (Section 15.205, 15.209)

f (MHz)	Bandwidth (kHz) Type of detector	Noted receiver level dB μ V	Test distance m	Correction factor dB	Distance extrapol. factor dB	AV Correction factor dB	Level corrected dB μ V/m	Limit dB μ V/m	Margin dB μ V/m	Polaris. EUT / antenna	Antenna height cm
30.0000	100, AV	≤ 3.5	3	-2.6* ⁵	0	0	0.9	40.0	39.10	H,V/H,V	100-400
57.6700	100, AV	42.9	3	-9.4*⁵	0	0	33.5	40.0	6.5	H/H180°	139
69.8700	100, AV	35.6	3	-9.2*⁵	0	0	26.4	40.0	13.6	H/H180°	139
88.0000	100, AV	≤ 3.5	3	-10.8* ⁵	0	0	-7.3	40.0	47.3	H,V/H,V	100-400
105.5200	100, AV	32.4	3	-9.9*⁵	0	0	22.5	43.5	21.0	H/V210°	166
144.9200	100, AV	29.2	3	-5.8*⁵	0	0	23.4	43.5	20.1	H/V210°	166
174.9400	100, AV	25.1	3	-7.5*⁵	0	0	17.6	43.5	25.9	H/V210°	166
216.0000	100, AV	≤ 3.5	3	-10.3* ⁵	0	0	-6.8	43.5	50.3	H,V/H,V	100-400
960.0000	100, AV	≤ 3.5	3	8.5* ⁵	0	0	12.0	43.5	31.5	H,V/H,V	100-400
1700.0000	1000, AV	≤ 4.5	3	3.8* ⁶	0	0	8.3	54.0	45.7	H,V/H,V	100-400
2708.100	1000, AV	38.2	3	8.1*⁶	0	0	46.3	54.0	7.7	V/H,0°	169
3610.800	1000, AV	35.7	3	8.3*⁶	0	0	44.0	54.0	10.0	V/V,0°	210
4513.500	1000, AV	39.5	3	8.9*⁶	0	0	48.4	54.0	5.6	V/V,0°	105
5416.200	1000, AV	≤ 10	3	9.2*⁶	0	0	19.2	54.0	34.8	H,V/H,V	100-400
7500.0000	1000, AV	≤ 14	3	12.9* ⁶	0	0	26.9	54.0	27.1	H,V/H,V	100-400
8124.500	1000, AV	≤ 14	3	14.8*⁶	0	0	28.8	54.0	25.2	H,V/H,V	100-400
9027.000	1000, AV	≤ 14	3	15.9*⁶	0	0	29.9	54.0	24.1	H,V/H,V	100-400
11000.0000	1000, AV	≤ 14	3	18.3* ⁶	0	0	32.3	54.0	21.7	H,V/H,V	100-400
Measurement uncertainty			± 4 dB								

Bandwidth = the measuring receiver bandwidth

Remark: *¹ noise floor noise level of the measuring instrument ≤ 3.5dB μ V @ 3m distance (30 – 1,000 MHz)Remark: *² noise floor noise level of the measuring instrument ≤ 4.5dB μ V @ 3m distance (1,000 – 2,000 MHz)Remark: *³ noise floor noise level of the measuring instrument ≤ 10dB μ V @ 3m distance (2,000 – 5,500 MHz)Remark: *⁴ noise floor noise level of the measuring instrument ≤ 14dB μ V @ 3m distance (5,500 – 14,500 MHz)Remark: *⁵ for using a pre-amplifier in the range between 100 kHz and 1,000 MHzRemark: *⁶ for using a pre-amplifier in the range between 1.0 GHz and 18.0 GHz

The equipment meets the requirements	yes	no	not
--------------------------------------	-----	---------------	----------------

Further test results are attached	yes	no	page no:
-----------------------------------	-----	----	----------

EUT: UHF Long Range Reader ID ISC.LRU 3500
FCC ID: PJMLRU3000

Date of issue: 2010-01-19

(middle frequency)(915.000 MHz)

TRANSMITTER SPURIOUS RADIATION BELOW 30 MHz (Section 15.205, 15.209)

f (MHz)	Bandwidth (kHz) Type of detector	Noted receiver level dB μ V	Test distance m	Correction factor dB	Distance extrapol. factor dB	Level corrected dB μ V/m	Limit dB μ V/m	Margin dB μ V/m	Polarisation EUT / antenna orientation
0.1200	PK/0.2kHz	< 4.0	10	20.2	-59.1	-34.90	Pk46.0- @ 300	80.90	V, H/0-360°
	AV/0.2kHz	< 4.0	10	20.2	-59.1	-34.90	AV26.0 @ 300	80.90	V, H/0-360°
0.5000	AV/0.2kHz	< 4.0	10	20.2	-19.1	5.10	AV33.6 @ 30	28.5	V, H/0-360°
1.5000	AV/0.2kHz	< 4.0	10	20.2	-19.1	5.10	AV24.1 @ 30	19.00	V, H/0-360°
3.0000	AV/9.0kHz	< 4.0	10	20.2	-19.1	5.10	AV29.5 @ 30	24.4	V, H/0-360°
5.0000	AV/9.0kHz	< 4.0	10	20.2	-19.1	5.10	AV29.5 @ 30	24.4	V, H/0-360°
8.0000	AV/9.0kHz	< 4.0	10	20.2	-19.1	5.10	AV29.5 @ 30	24.4	V, H/0-360°
10.0000	AV/9.0kHz	< 4.0	10	20.2	-19.1	5.10	AV29.5 @ 30	24.4	V, H/0-360°
20.0000	AV/9.0kHz	< 4.0	10	20.2	-19.1	5.10	AV29.5 @ 30	24.4	V, H/0-360°
30.0000	AV/9.0kHz	< 4.0	10	20.2	-19.1	5.10	AV29.5 @ 30	24.4	V, H/0-360°
No emissions detected									
Measurement uncertainty			± 4 dB						

Remark: *¹ Noise level of the measuring instrument ≤ 4.0 dB μ V @ 10m distance (0.009 MHz – 30 MHz)

Remark: * Peak Limit according to Section 15.35 (b).

EUT: UHF Long Range Reader ID ISC.LRU 3500
FCC ID: PJMLRU3000

Date of issue: 2010-01-19

(middle frequency)(914.700 MHz)
 worst case

TRANSMITTER SPURIOUS RADIATION ABOVE 30 MHz (Section 15.205, 15.209)

f (MHz)	Bandwidth (kHz) Type of detector	Noted receiver level dBµV	Test distance m	Correction factor dB	Distance extrapol. factor dB	AV Correction factor dB	Level corrected dBµV/m	Limit dBµV/m	Margin dBµV/m	Polaris. EUT / antenna	Antenna height cm
30.0000	100, AV	≤ 3.5	3	-2.6* ⁵	0	0	0.9	40.0	39.10	H,V/H,V	100-400
57.6700	100, AV	42.9	3	-9.4*⁵	0	0	33.5	40.0	6.5	H/H180°	139
69.8700	100, AV	35.6	3	-9.2*⁵	0	0	26.4	40.0	13.6	H/H180°	139
88.0000	100, AV	≤ 3.5	3	-10.8* ⁵	0	0	-7.3	40.0	47.3	H,V/H,V	100-400
105.5200	100, AV	32.4	3	-9.9*⁵	0	0	22.5	43.5	21.0	H/V210°	166
144.9200	100, AV	29.2	3	-5.8*⁵	0	0	23.4	43.5	20.1	H/V210°	166
174.9400	100, AV	25.1	3	-7.5*⁵	0	0	17.6	43.5	25.9	H/V210°	166
216.0000	100, AV	≤ 3.5	3	-10.3* ⁵	0	0	-6.8	43.5	50.3	H,V/H,V	100-400
960.0000	100, AV	≤ 3.5	3	8.5* ⁵	0	0	12.0	43.5	31.5	H,V/H,V	100-400
1700.0000	1000, AV	≤ 4.5	3	3.8* ⁶	0	0	8.3	54.0	45.7	H,V/H,V	100-400
2744.1000	1000, AV	37.0	3	8.1*⁶	0	0	45.1	54.0	7.7	V/H,0°	171
3658.8000	1000, AV	35.0	3	8.3*⁶	0	0	43.3	54.0	10.0	V/V,0°	205
4573.5000	1000, AV	40.0	3	8.9*⁶	0	0	48.9	54.0	5.6	V/V,0°	102
5000.0000	1000, AV	≤ 10	3	9.2* ⁶	0	0	19.2	54.0	34.8	H,V/H,V	100-400
7317.6000	1000, AV	≤ 14	3	12.9*⁶	0	0	26.9	54.0	27.1	H,V/H,V	100-400
8232.3000	1000, AV	≤ 14	3	14.8*⁶	0	0	28.8	54.0	25.2	H,V/H,V	100-400
9147.0000	1000, AV	≤ 14	3	15.9*⁶	0	0	29.9	54.0	24.1	H,V/H,V	100-400
11000.0000	1000, AV	≤ 14	3	18.3* ⁶	0	0	32.3	54.0	21.7	H,V/H,V	100-400

Measurement uncertainty

± 4 dB

Bandwidth = the measuring receiver bandwidth

- Remark: *¹ noise floor noise level of the measuring instrument ≤ 3.5dBµV @ 3m distance (30 – 1,000 MHz)
- Remark: *² noise floor noise level of the measuring instrument ≤ 4.5dBµV @ 3m distance (1,000 – 2,000 MHz)
- Remark: *³ noise floor noise level of the measuring instrument ≤ 10dBµV @ 3m distance (2,000 – 5,500 MHz)
- Remark: *⁴ noise floor noise level of the measuring instrument ≤ 14dBµV @ 3m distance (5,500 – 14,500 MHz)
- Remark: *⁵ for using a pre-amplifier in the range between 100 kHz and 1,000 MHz
- Remark: *⁶ for using a pre-amplifier in the range between 1.0 GHz and 18.0 GHz

The equipment meets the requirements	yes	no	not
--------------------------------------	------------	---------------	----------------

Further test results are attached	yes	no	page no:
-----------------------------------	------------	-----------	----------

EUT: UHF Long Range Reader ID ISC.LRU 3500
FCC ID: PJMLRU3000

Date of issue: 2010-01-19

(highest frequency)(927.000 MHz)

TRANSMITTER SPURIOUS RADIATION BELOW 30 MHz (Section 15.205, 15.209)									
f (MHz)	Bandwidth (kHz) Type of detector	Noted receiver level dB μ V	Test distance m	Correction factor dB	Distance extrapol. factor dB	Level corrected dB μ V/m	Limit dB μ V/m	Margin dB μ V/m	Polarisation EUT / antenna orientation
0.1200	PK/0.2kHz	< 4.0	10	20.2	-59.1	-34.90	Pk46.0- @ 300	80.90	V, H/0-360°
	AV/0.2kHz	< 4.0	10	20.2	-59.1	-34.90	AV26.0 @ 300	80.90	V, H/0-360°
0.5000	AV/0.2kHz	< 4.0	10	20.2	-19.1	5.10	AV33.6 @ 30	28.5	V, H/0-360°
1.5000	AV/0.2kHz	< 4.0	10	20.2	-19.1	5.10	AV24.1 @ 30	19.00	V, H/0-360°
3.0000	AV/9.0kHz	< 4.0	10	20.2	-19.1	5.10	AV29.5 @ 30	24.4	V, H/0-360°
5.0000	AV/9.0kHz	< 4.0	10	20.2	-19.1	5.10	AV29.5 @ 30	24.4	V, H/0-360°
8.0000	AV/9.0kHz	< 4.0	10	20.2	-19.1	5.10	AV29.5 @ 30	24.4	V, H/0-360°
10.0000	AV/9.0kHz	< 4.0	10	20.2	-19.1	5.10	AV29.5 @ 30	24.4	V, H/0-360°
20.0000	AV/9.0kHz	< 4.0	10	20.2	-19.1	5.10	AV29.5 @ 30	24.4	V, H/0-360°
30.0000	AV/9.0kHz	< 4.0	10	20.2	-19.1	5.10	AV29.5 @ 30	24.4	V, H/0-360°
No emissions detected									
Measurement uncertainty			± 4 dB						

Remark: *¹ Noise level of the measuring instrument ≤ 4.0 dB μ V @ 10m distance (0.009 MHz – 30 MHz)

Remark: * Peak Limit according to Section 15.35 (b).

EUT: UHF Long Range Reader ID ISC.LRU 3500
FCC ID: PJMLRU3000

Date of issue: 2010-01-19

(highest frequency)(927.200 MHz)
 worst case

TRANSMITTER SPURIOUS RADIATION ABOVE 30 MHz (Section 15.205, 15.209)

f (MHz)	Bandwidth (kHz) Type of detector	Noted receiver level dB μ V	Test distance m	Correction factor dB	Distance extrapol. factor dB	AV Correction factor dB	Level corrected dB μ V/m	Limit dB μ V/m	Margin dB μ V/m	Polaris. EUT / antenna	Antenna height cm
30.0000	100, AV	≤ 3.5	3	-2.6* ⁵	0	0	0.9	40.0	39.10	H,V/H,V	100-400
57.6700	100, AV	42.9	3	-9.4*⁵	0	0	33.5	40.0	6.5	H/H180°	139
69.8700	100, AV	35.6	3	-9.2*⁵	0	0	26.4	40.0	13.6	H/H180°	139
88.0000	100, AV	≤ 3.5	3	-10.8* ⁵	0	0	-7.3	40.0	47.3	H,V/H,V	100-400
105.5200	100, AV	32.4	3	-9.9*⁵	0	0	22.5	43.5	21.0	H/V210°	166
144.9200	100, AV	29.2	3	-5.8*⁵	0	0	23.4	43.5	20.1	H/V210°	166
174.9400	100, AV	25.1	3	-7.5*⁵	0	0	17.6	43.5	25.9	H/V210°	166
216.0000	100, AV	≤ 3.5	3	-10.3* ⁵	0	0	-6.8	43.5	50.3	H,V/H,V	100-400
960.0000	100, AV	≤ 3.5	3	8.5* ⁵	0	0	12.0	43.5	31.5	H,V/H,V	100-400
1700.0000	1000, AV	≤ 4.5	3	3.8* ⁶	0	0	8.3	54.0	45.7	H,V/H,V	100-400
2781.6000	1000, AV	39.0	3	8.1*⁶	0	0	47.1	54.0	6.9	V/H,0°	173
3708.8000	1000, AV	34.1	3	8.3*⁶	0	0	42.2	54.0	11.8	V/V,0°	199
4636.0000	1000, AV	36.8	3	8.9*⁶	0	0	45.7	54.0	8.3	V/V,0°	108
5000.0000	1000, AV	≤ 10	3	9.2* ⁶	0	0	19.2	54.0	34.8	H,V/H,V	100-400
7417.6000	1000, AV	≤ 14	3	12.9*⁶	0	0	26.9	54.0	27.1	H,V/H,V	100-400
8344.8000	1000, AV	≤ 14	3	14.8*⁶	0	0	28.8	54.0	25.2	H,V/H,V	100-400
9272.0000	1000, AV	≤ 14	3	15.9*⁶	0	0	29.9	54.0	24.1	H,V/H,V	100-400
11000.0000	1000, AV	≤ 14	3	18.3* ⁶	0	0	32.3	54.0	21.7	H,V/H,V	100-400
Measurement uncertainty			± 4 dB								

Bandwidth = the measuring receiver bandwidth

- Remark: *¹ noise floor noise level of the measuring instrument ≤ 3.5dB μ V @ 3m distance (30 – 1,000 MHz)
 Remark: *² noise floor noise level of the measuring instrument ≤ 4.5dB μ V @ 3m distance (1,000 – 2,000 MHz)
 Remark: *³ noise floor noise level of the measuring instrument ≤ 10dB μ V @ 3m distance (2,000 – 5,500 MHz)
 Remark: *⁴ noise floor noise level of the measuring instrument ≤ 14dB μ V @ 3m distance (5,500 – 14,500 MHz)
 Remark: *⁵ for using a pre-amplifier in the range between 100 kHz and 1,000 MHz
 Remark: *⁶ for using a pre-amplifier in the range between 1.0 GHz and 18.0 GHz

The equipment meets the requirements	yes	no	not
--------------------------------------	-----	----	-----

Further test results are attached	yes	no	page no:
-----------------------------------	-----	----	----------

EUT: UHF Long Range Reader ID ISC.LRU 3500
FCC ID: PJMLRU3000

Date of issue: 2010-01-19

11.4 Channel occupancy / bandwidth

11.4.1 Regulation

15.247(a)(1)(i) For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

11.4.2 Test equipment

Type	Manufacturer/ Model no.	Serial no.	Last calibration	Next calibration
Receiver (9 kHz –18.0 GHz)	Rohde & Schwarz Spectrum Analyzer FSL 18 (171a)	100.117	2008/10	2010/10
Probe for relative measurement (800 – 950MHz)	R&S 204.1010.02 (357)	UG 89B/J	2009/03	2012/03

11.4.3 Test procedures

Testing was carried out in accordance with the less than 250 kHz requirements.
Measurements were carried out on 3 single frequencies across the operating range.
Measurements were carried out with different tags, the worst case measurement were documented.

There are 50 hopping frequencies in use, the maximum 20 dB bandwidth is 55.9 kHz and the average time of occupancy is 398.3 msec.

In addition the average time of occupancy on any frequency shall not exceed 400 milliseconds in any 20 second period.

Using a spectrum analyser with a Zero span, the “on frequency time” was determined to be maximal 292 msec.
With the spectrum analyser still operating with a Zero span the transmitter was observed to be “on frequency”, on average, 1 time in any 15 second period.

Therefore $292 \text{ msec} * \frac{4}{3} \text{ time} = 389.3 \text{ msec}$.

11.4.4 Result

The equipment meets the requirements	yes	no	nt
Further test results are attached	yes	no	Annex no. 11

EUT: UHF Long Range Reader ID ISC.LRU 3500
FCC ID: PJMLRU3000

Date of issue: 2010-01-19

11.5 Peak output power

11.5.1 Regulation

15.247(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following:

(2) For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

11.5.2 Test equipment

Type	Manufacturer/ Model no.	Serial no.	Last calibration	Next calibration
Receiver (9 kHz –18.0 GHz)	Rohde & Schwarz Spectrum Analyzer FSL 18 (171a)	100.117	2008/10	2010/10
Receiver (9 kHz –40.0 GHz)	Anritsu Spectrum Analyzer MS2668C (359a)	6200163244	2009/04	2011/04
Pre-amplifier (100kHz - 1.3GHz)	Hewlett Packard 8447 E (166a)	1726A00705	2008/02	2010/02
Bilog antenna (30- 1000 MHz)	Schwarzbeck VULP 9168 (406)		2007/02	2013/02
RF- cable	Kabelmetal 18m [N]	K1	2009/01	2010/01
RF- cable	Aircell 0.5m [BNC]	K40	2009/01	2010/01
RF- cable	Aircell 1m [BNC/N]	K56	2009/01	2010/01
RF- cable	Sucoflex 106 Suhner 6,4m [N]	K74	2009/01	2010/01
RF- cable	Sucoflex 106 Suhner 6,4m [N]	K75	2009/01	2010/01

11.5.3 Test procedures

The EUT and this peripheral (when additional equipment exists) are placed on a turn table which is 0.8m above the ground. The turn table would be allowed to rotate 360 degrees to determine the position of the maximum emission level. The test distance between the EUT and the receiving antenna are 3 m. To find the maximum emission, the polarization of the receiving antenna are changed in horizontal and vertical polarization, the position of the EUT was changed in different orthogonal determinations.

ANSI C63.4: 2003 Section 8 “Radiated Emissions Testing”

EUT: UHF Long Range Reader ID ISC.LRU 3500
FCC ID: PJMLRU3000

Date of issue: 2010-01-19

Radiated emissions test characteristics	
Frequency range	0.009 MHz - 14,000 MHz
Test distance	3 m*(for frequencies above 30 MHz)
Test instrumentation resolution bandwidth	9 kHz (0.009 – 30MHz)
	120 kHz (30 MHz - 1,000 MHz)
	1 MHz (1000 MHz - 10,000 MHz)
Receive antenna scan height	1 m (0.009 MHz - 30 MHz)
	1 m - 4 m (30 MHz - 14,000 MHz)
Receive antenna polarization / orientation	0 – 360°
	Vertical / horizontal (30 MHz - 14,000 MHz)

11.5.4 Calculation of the radiated power

The radiated power is calculated by the following calculation:

Corrected Level = Receiver Level + Correction Factor (without the use of a pre-amplifier)

Corrected Level = Receiver Level + Correction Factor – Pre-amplifier (with the use of a pre-amplifier)

Receiver Level : Receiver reading without correction factors

Correction Factor : Substituted over the whole frequency band and listed in an correction table

For example:

The receiver reading is -32.7 dBm. The Correction Factor with the use of a pre-amplifier for the measured frequency of 434 MHz is +12.5 dB and the cable factor for the measured frequency is 0.71 dB, giving a power level of -19.49 dBm.

-19.49 dBm = 11.25 μ W

EUT: UHF Long Range Reader ID ISC.LRU 3500
FCC ID: PJMLRU3000

Date of issue: 2010-01-19

11.5.5 Result


(lowest frequency)(902.700 MHz)

PEAK OUTPUT POWER (Section 15.247 (b)(2))						
f (GHz)	Bandwidth (kHz) Type of detector	Noted receiver level dBm	Correction factor dB	Level corrected dBm	Limit dBm	Margin dB
902.700	100, PK	29.0	= Analyzer offset	29.0	30	1.0
Measurement uncertainty				± 3 dB		

* Bandwidth = the measuring receiver bandwidth

The equipment meets the requirements	yes	no	not
--------------------------------------	-----	----	-----

Further test results are attached	yes	no	page no:
-----------------------------------	-----	----	----------

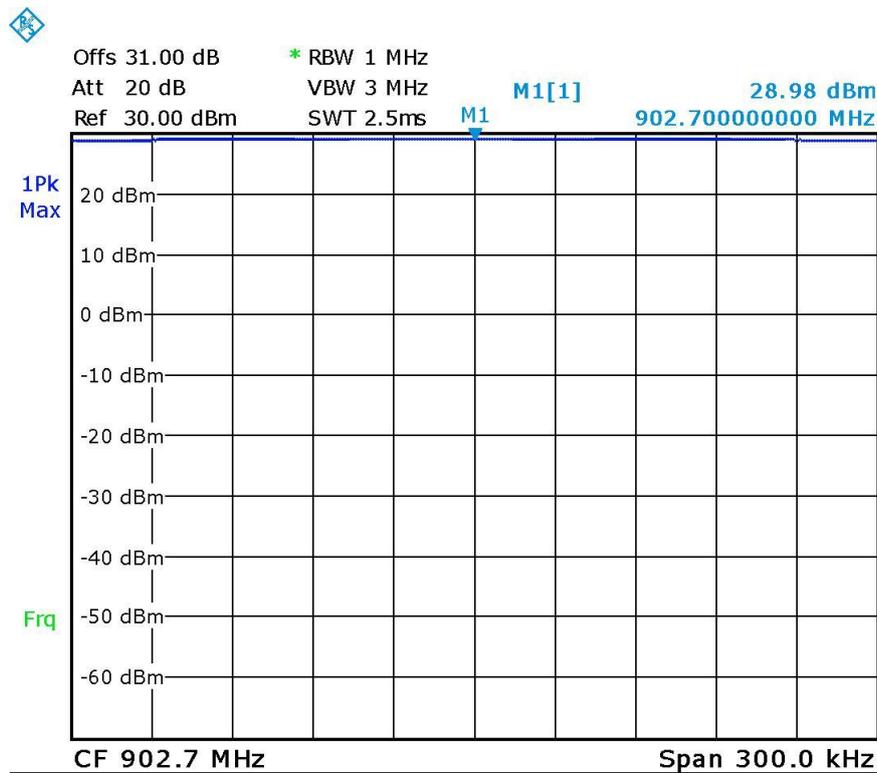

EUT: UHF Long Range Reader ID ISC.LRU 3500
FCC ID: PJMLRU3000

Date of issue: 2010-01-19


(middle frequency)(914.700 MHz)

PEAK OUTPUT POWER (Section 15.247 (b)(2))						
f (GHz)	Bandwidth (kHz) Type of detector	Noted receiver level dBm	Correction factor dB	Level corrected dBm	Limit dBm	Margin dB
914.700	100, PK	28.9	= Analyzer offset	28.9	30	1.1
Measurement uncertainty		± 3 dB				

* Bandwidth = the measuring receiver bandwidth

The equipment meets the requirements	yes	no	not
--------------------------------------	-----	----	-----

Further test results are attached	yes	no	page no:
-----------------------------------	-----	----	----------

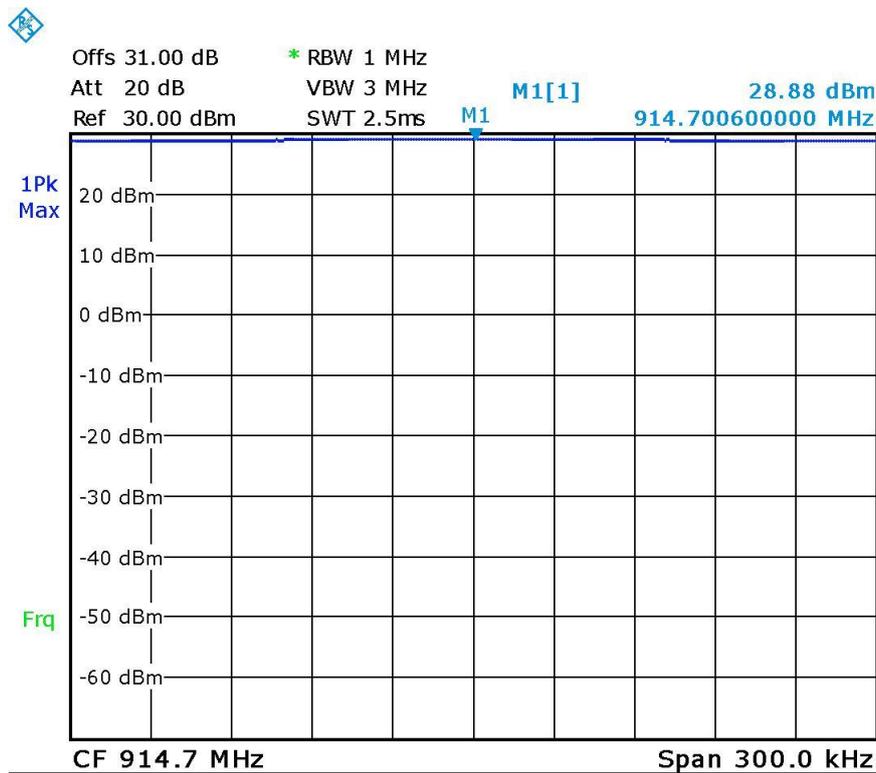

EUT: UHF Long Range Reader ID ISC.LRU 3500
FCC ID: PJMLRU3000

Date of issue: 2010-01-19


(highest frequency)(927.200 MHz)

PEAK OUTPUT POWER (Section 15.247 (b)(2))						
f (GHz)	Bandwidth (kHz) Type of detector	Noted receiver level dBm	Correction factor dB	Level corrected dBm	Limit dBm	Margin dB
927.200	100, PK	28.5	= Analyzer offset	28.5	30	1.5
Measurement uncertainty		± 3 dB				

* Bandwidth = the measuring receiver bandwidth

The equipment meets the requirements	yes	no	not
--------------------------------------	-----	---------------	----------------

Further test results are attached	yes	no	page no:
-----------------------------------	-----	----	----------

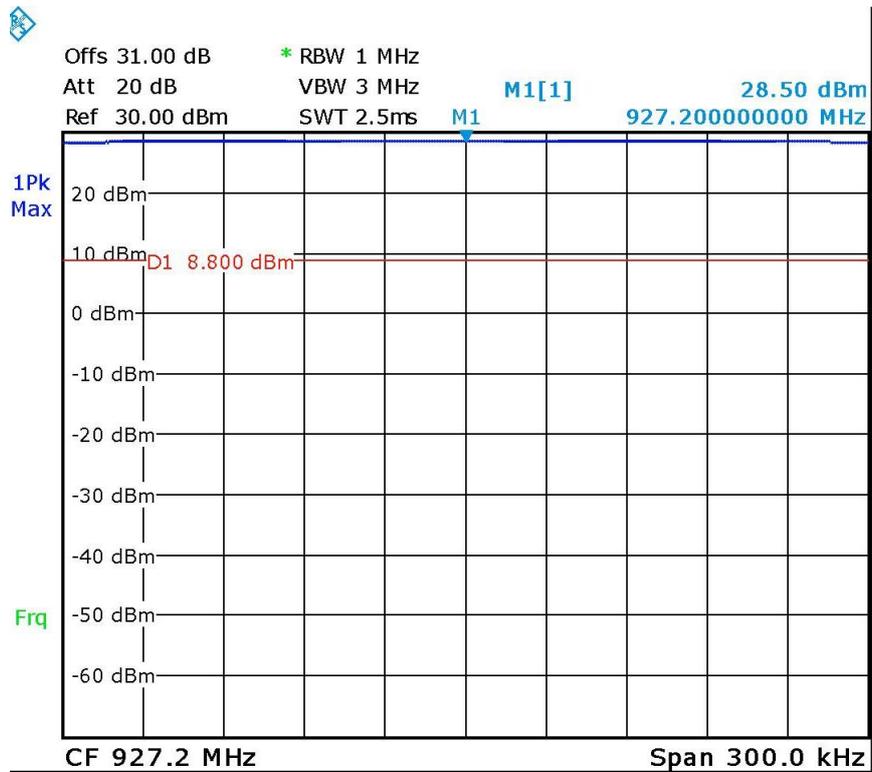

EUT: UHF Long Range Reader ID ISC.LRU 3500
FCC ID: PJMLRU3000

Date of issue: 2010-01-19

Max. peak output power (radiated) § 15.247 (b)(2)

Max. radiated peak output power e.i.r.p.(Section 15.247 (b)(2))						
Antenna	f (GHz)	Noted receiver level dBm	Antenna gain dBi	Level corrected e.i.r.p. dBm	Limit e.i.r.p. dBm	Margin dB
<i>ID .ISC.ANT. U170/170-FCC</i>	902.700	29.0	1.0	29.4	36*	6.6
	914.700	28.9	1.0	29.3	36*	6.7
	927.200	28.5	1.0	28.9	36*	7.1
<i>ID ISC.ANT. U270/270-FCC</i>	902.700	29.0	5.7	34.1	36*	1.9
	914.700	28.9	5.7	34.0	36*	2.0
	927.200	28.5	5.7	33.6	36*	2.4
<i>ID ISC.ANT. U600/270-FCC</i>	902.700	29.0	7.5	35.9	36*	0.1
	914.700	28.9	7.5	35.8	36*	0.2
	927.200	28.5	7.5	35.4	36*	0.6
Measurement uncertainty		± 3 dB				

* Limit = 30 dBm + 6 dBi (antenna gain) = 4 Watt

calculated by adding the conducted power and the antenna gain.

Max. peak output power (radiated) = Noted receiver level + Antenna gain - Coax cable attenuation
Coax cable attenuation min. = 0.6 dB

The equipment meets the requirements	yes	no	nt
--------------------------------------	-----	----	----

Further test results are attached	yes	no	page no:
-----------------------------------	-----	----	----------

EUT: UHF Long Range Reader ID ISC.LRU 3500
FCC ID: PJMLRU3000

Date of issue: 2010-01-19

11.6 Out of band emissions

11.6.1 Regulation

15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

11.6.2 Test equipment

Type	Manufacturer/ Model no.	Serial no.	Last calibration	Next calibration
Receiver (9 kHz –18.0 GHz)	Rohde & Schwarz Spectrum Analyzer FSL 18 (171a)	100.117	2008/10	2010/10
Receiver (9 kHz –40.0 GHz)	Anritsu Spectrum Analyzer MS2668C (359a)	6200163244	2009/04	2011/04
Pre-amplifier (100kHz - 1.3GHz)	Hewlett Packard 8447 E (166a)	1726A00705	2008/02	2010/02
Pre-amplifier (1GHz - 18GHz)	Narda --- (345)	---	2008/02	2010/02
Bilog antenna (30- 1000 MHz)	Schwarzbeck VULP 9168 (406)		2007/02	2013/02
Horn antenna (0.86-8.5 GHz)	Schwarzbeck BBHA 9120 A (284)	236	2008/01	2013/01
Horn antenna (2.0-14.5 GHz)	Schwarzbeck BBHA 9120 C (169)	305	2008/01	2013/01
Horn antenna (14.5-40 GHz)	Schwarzbeck BBHA 9170 (281)	41	2000/01	2010/01
RF- cable	Kabelmetal 18m [N]	K1	2009/01	2010/01
RF- cable	Aircell 0.5m [BNC]	K40	2009/01	2010/01
RF- cable	Aircell 1m [BNC/N]	K56	2009/01	2010/01
RF- cable	Sucoflex 106 Suhner 6,4m [N]	K74	2009/01	2010/01
RF- cable	Sucoflex 106 Suhner 6,4m [N]	K75	2009/01	2010/01

EUT: UHF Long Range Reader ID ISC.LRU 3500
FCC ID: PJMLRU3000

Date of issue: 2010-01-19

11.6.3 Test procedures

The EUT and this peripheral (when additional equipment exists) are placed on a turn table which is 0.8m above the ground. The turn table would be allowed to rotate 360 degrees to determine the position of the maximum emission level. The test distance between the EUT and the receiving antenna are 3 m. To find the maximum emission, the polarization of the receiving antenna are changed in horizontal and vertical polarization, the position of the EUT was changed in different orthogonal determinations.

ANSI C63.4: 2003 Section 8 “Radiated Emissions Testing”

Radiated emissions test characteristics	
Frequency range	0.009 MHz - 14,000 MHz
Test distance	3 m*(for frequencies above 30 MHz)
Test instrumentation resolution bandwidth	9 kHz (0.009 – 30MHz)
	120 kHz (30 MHz - 1,000 MHz)
	1 MHz (1000 MHz - 10,000 MHz)
Receive antenna scan height	1 m (0.009 MHz - 30 MHz)
	1 m - 4 m (30 MHz - 14,000 MHz)
Receive antenna polarization / orientation	0 – 360°
	Vertical / horizontal (30 MHz - 14,000 MHz)

11.6.4 Calculation of the radiated power

The radiated power is calculated by the following calculation:

Corrected Level = Receiver Level + Correction Factor (without the use of a pre-amplifier)

Corrected Level = Receiver Level + Correction Factor – Pre-amplifier (with the use of a pre-amplifier)

Receiver Level : Receiver reading without correction factors

Correction Factor : Substituted over the whole frequency band and listed in an correction table

For example:

The receiver reading is -32.7 dBm. The Correction Factor with the use of a pre-amplifier for the measured frequency of 434 MHz is +12.5 dB and the cable factor for the measured frequency is 0.71 dB, giving a power level of -19.49 dBm.
 -19.49 dBm = 11.25 µW

EUT: UHF Long Range Reader ID ISC.LRU 3500
FCC ID: PJMLRU3000


Date of issue: 2010-01-19

11.6.5 Result

(lowest frequency, 902.700 MHz)

Spurious Emissions - conducted (Transmitter) (Section 15.247 (c)(1))						
f (GHz)	Bandwidth (kHz) Type of detector	Noted receiver level dBm	Correction factor dB	Level corrected dBm	Limit	Margin dB
902.700	100, PK	29.0	= Analyzer offset	29.0	30 dBm	1.0
1805.400	100, PK	-49.6	= Analyzer offset + transducer factors	-49.6	-20 dBc	58.6
2708.100	100, PK	-41.5		-41.5	-20 dBc	50.5
3610.800	100, PK	-38.9		-38.9	-20 dBc	37.9
4513.500	100, PK	-47.2		-47.2	-20 dBc	56.2
5416.200	100, PK	< -46.5		-46.5	-20 dBc	55.5
6318.900	100, PK	< -75.0		-75.0	-20 dBc	85.0
7221.600	100, PK	< -75.0		-75.0	-20 dBc	85.0
8124.300	100, PK	< -75.0		-75.0	-20 dBc	85.0
9027.000	100, PK	< -75.0		-75.0	-20 dBc	85.0
9929.700	100, PK	< -75.0		-75.0	-20 dBc	85.0
Measurement uncertainty			± 3 dB			

* Bandwidth = the measuring receiver bandwidth

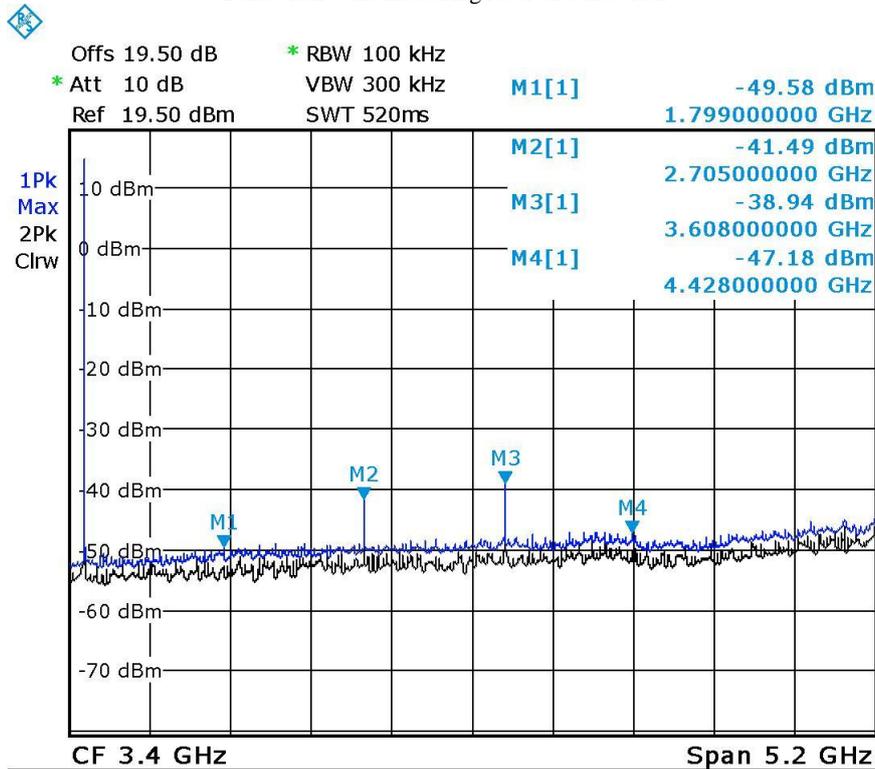


EUT: UHF Long Range Reader ID ISC.LRU 3500
FCC ID: PJMLRU3000

Date of issue: 2010-01-19

middle frequency, 914.700 MHz)

Spurious Emissions - conducted (Transmitter) (Section 15.247 (c)(1))						
f (GHz)	Bandwidth (kHz) Type of detector	Noted receiver level dBm	Correction factor dB	Level corrected dBm	Limit	Margin dB
914.700	100, PK	28.9	= Analyzer offset	28.9	30 dBm	1.1
1829.400	100, PK	-44.7	= Analyzer offset + transducer factors	-44.7	-20 dBc	53.6
2744.100	100, PK	-44.4		-44.4	-20 dBc	53.3
3658.800	100, PK	-42.6		-42.6	-20 dBc	51.5
4573.500	100, PK	-48.1		-48.1	-20 dBc	57.0
5488.200	100, PK	< -46.5		-46.5	-20 dBc	55.4
6402.900	100, PK	< -75.0		-75.0	-20 dBc	84.9
7317.600	100, PK	< -75.0		-75.0	-20 dBc	84.9
8232.300	100, PK	< -75.0		-75.0	-20 dBc	84.9
9147.000	100, PK	< -75.0		-75.0	-20 dBc	84.9
10061.700	100, PK	< -75.0		-75.0	-20 dBc	84.9
Measurement uncertainty				± 3 dB		

* Bandwidth = the measuring receiver bandwidth

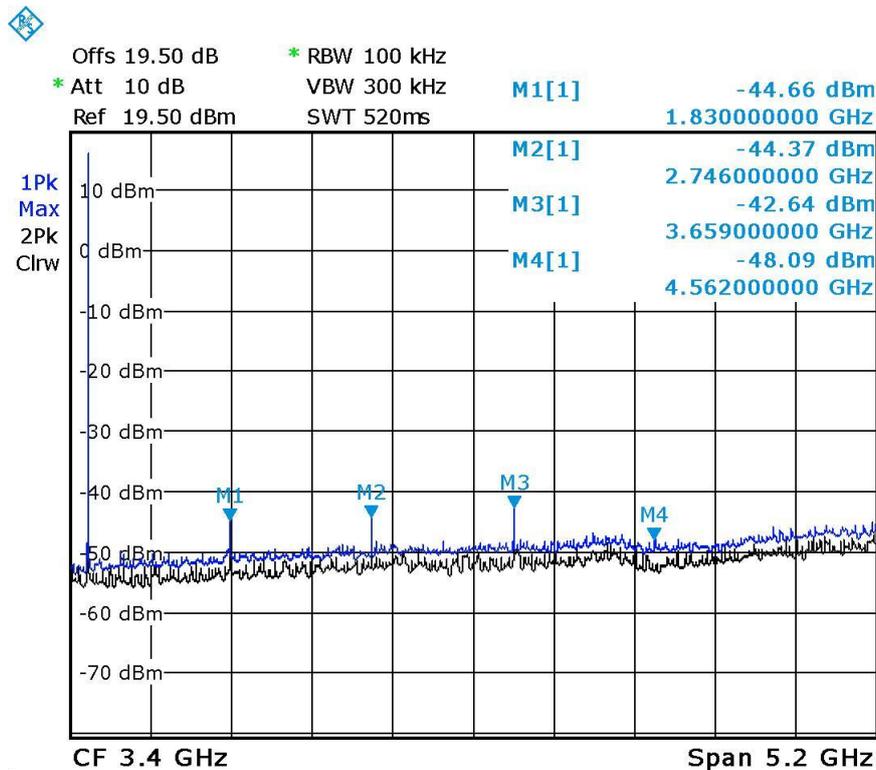


EUT: UHF Long Range Reader ID ISC.LRU 3500
FCC ID: PJMLRU3000

Date of issue: 2010-01-19

highest frequency, 927.200 MHz)

Spurious Emissions - conducted (Transmitter) (Section 15.247 (c)(1))						
f (GHz)	Bandwidth (kHz) Type of detector	Noted receiver level dBm	Correction factor dB	Level corrected dBm	Limit	Margin dB
927.200	100, PK	28.5	= Analyzer offset	28.5	30 dBm	1.5
1854.400	100, PK	-41.6	= Analyzer offset + transducer factors	-41.6	-20 dBc	50.1
2781.600	100, PK	-44.5		-44.5	-20 dBc	53.0
3708.800	100, PK	-46.1		-46.1	-20 dBc	54.6
4636.000	100, PK	-44.0		-44.0	-20 dBc	52.5
5563.200	100, PK	< -75.0		-75.0	-20 dBc	55.0
6490.400	100, PK	< -75.0		-75.0	-20 dBc	84.5
7417.600	100, PK	< -75.0		-75.0	-20 dBc	84.5
8344.800	100, PK	< -75.0		-75.0	-20 dBc	84.5
9272.000	100, PK	< -75.0		-75.0	-20 dBc	84.5
10199.200	100, PK	< -75.0		-75.0	-20 dBc	84.5
Measurement uncertainty			± 3 dB			

* Bandwidth = the measuring receiver bandwidth

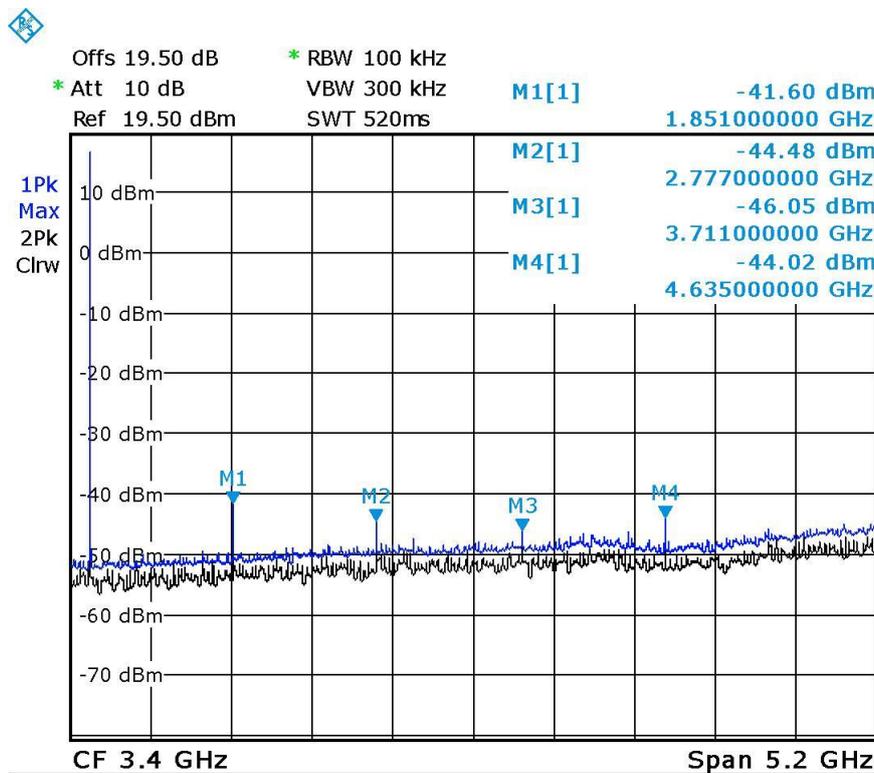

EUT: UHF Long Range Reader ID ISC.LRU 3500
FCC ID: PJMLRU3000

Date of issue: 2010-01-19

(lowest frequency, 902.700MHz)
 worst case

Spurious emissions - radiated (Transmitter) (Section 15.247 (c)(1))

f (MHz)	Bandwidth (kHz) Type of detector	Noted receiver level dBm	Test distance m	Correction factor dB	Distance extrapol. factor dB	AV Correction factor dB	Level corrected dBm	Limit dBm	Margin dB	Polaris. EUT / antenna	Antenna height cm
1805.400	100, PK	-62.7	3	20.1* ⁶	0	0	-43.6	10	53.6	V,0°/V	145
2708.100	Measured acc. to Section 15.205(a) and section 15.209(a)										
3610.800	Measured acc. to Section 15.205(a) and section 15.209(a)										
4513.500	Measured acc. to Section 15.205(a) and section 15.209(a)										
5416.200	Measured acc. to Section 15.205(a) and section 15.209(a)										
6318.900	100, PK	≤ -92	3	23.1* ⁶	0	0	-68.9	10	78.9	H,V/H,V	100-400
7221.600	Measured acc. to Section 15.205(a) and section 15.209(a)										
8124.300	Measured acc. to Section 15.205(a) and section 15.209(a)										
9027.000	Measured acc. to Section 15.205(a) and section 15.209(a)										
9929.700	100, PK	≤ -92	3	25.3* ⁶	0	0	-66.7	10	76.7	H,V/H,V	100-400
Measurement uncertainty			± 4 dB								

* Bandwidth = the measuring receiver bandwidth

EUT: UHF Long Range Reader ID ISC.LRU 3500
FCC ID: PJMLRU3000

Date of issue: 2010-01-19

(middle frequency, 914.700MHz)
 worst case

Spurious emissions - radiated (Transmitter) (Section 15.247 (c)(1))

f (MHz)	Bandwidth (kHz) Type of detector	Noted receiver level dBm	Test distance m	Correction factor dB	Distance extrapol. factor dB	AV Correction factor dB	Level corrected dBm	Limit dBm	Margin dB	Polaris. EUT / antenna	Antenna height cm
1829.400	100, PK	-64.3	3	20.1* ⁶	0	0	-44.2	10		V,0°/V	147
2744.100	Measured acc. to Section 15.205(a) and section 15.209(a)										
3658.800	Measured acc. to Section 15.205(a) and section 15.209(a)										
4573.500	Measured acc. to Section 15.205(a) and section 15.209(a)										
5488.200	100, PK	≤ -92	3	21.2* ⁶	0	0	-70.8	10	80.8	H,V/H,V	100-400
6402.900	100, PK	≤ -92	3	23.1* ⁶	0	0	-68.9	10	78.9	H,V/H,V	100-400
7317.600	Measured acc. to Section 15.205(a) and section 15.209(a)										
8232.300	Measured acc. to Section 15.205(a) and section 15.209(a)										
9147.000	Measured acc. to Section 15.205(a) and section 15.209(a)										
10061.700	100, PK	≤ -92	3	25.3* ⁶	0	0	-66.7	10	76.7	H,V/H,V	100-400
Measurement uncertainty			± 4 dB								

* Bandwidth = the measuring receiver bandwidth

EUT: UHF Long Range Reader ID ISC.LRU 3500
FCC ID: PJMLRU3000

Date of issue: 2010-01-19

(highest frequency, 927.200MHz)
 worst case

Spurious emissions - radiated (Transmitter) (Section 15.247 (c)(1))

f (GHz)	Bandwidth (kHz) Type of detector	Noted receiver level dBm	Test distance m	Correction factor dB	Distance extrapol. factor dB	AV Correction factor dB	Level corrected dBm	Limit dBm	Margin dB	Polaris. EUT / antenna	Antenna height cm
1854.400	100, PK	-68.8	3	20.1* ⁶	0	0	-48.7	10	58.7	V,0°/V	144
2781.600	Measured acc. to Section 15.205(a) and section 15.209(a)										
3708.800	Measured acc. to Section 15.205(a) and section 15.209(a)										
4636.000	Measured acc. to Section 15.205(a) and section 15.209(a)										
5563.200	100, PK	≤ -92	3	21.2* ⁶	0	0	70.8	10	80.8	H,V/H,V	100-400
6490.400	100, PK	≤ -92	3	23.1* ⁶	0	0	68.9	10	78.9	H,V/H,V	100-400
7417.600	Measured acc. to Section 15.205(a) and section 15.209(a)										
8344.800	Measured acc. to Section 15.205(a) and section 15.209(a)										
9272.000	100, PK	≤ -92	3	24.6* ⁶	0	0	-67.4	10	77.4	H,V/H,V	100-400
10199.200	100, PK	≤ -92	3	25.3* ⁶	0	0	-66.7	10	76.7	H,V/H,V	100-400
Measurement uncertainty		± 4 dB									

* Bandwidth = the measuring receiver bandwidth

- Remark: *¹ noise floor noise level of the measuring instrument ≤ -103 dBm @ 3m distance (30 – 1,000 MHz)
 Remark: *² noise floor noise level of the measuring instrument ≤ -102 dBm @ 3m distance (1,000 – 2,000 MHz)
 Remark: *³ noise floor noise level of the measuring instrument ≤ -96 dBm @ 3m distance (2,000 – 5,500 MHz)
 Remark: *⁴ noise floor noise level of the measuring instrument ≤ -92 dBm @ 3m distance (5,500 – 14,500 MHz)
 Remark: *⁵ for using a pre-amplifier in the range between 100 kHz and 1,000 MHz
 Remark: *⁶ for using a pre-amplifier in the range between 1.0 GHz and 18.0 GHz



The equipment meets the requirements	yes	no	not
Further test results are attached	yes	no	page no:

EUT: UHF Long Range Reader ID ISC.LRU 3500
FCC ID: PJMLRU3000

Date of issue: 2010-01-19

11.6.5 Result

Band-edge compliance of conducted emissions

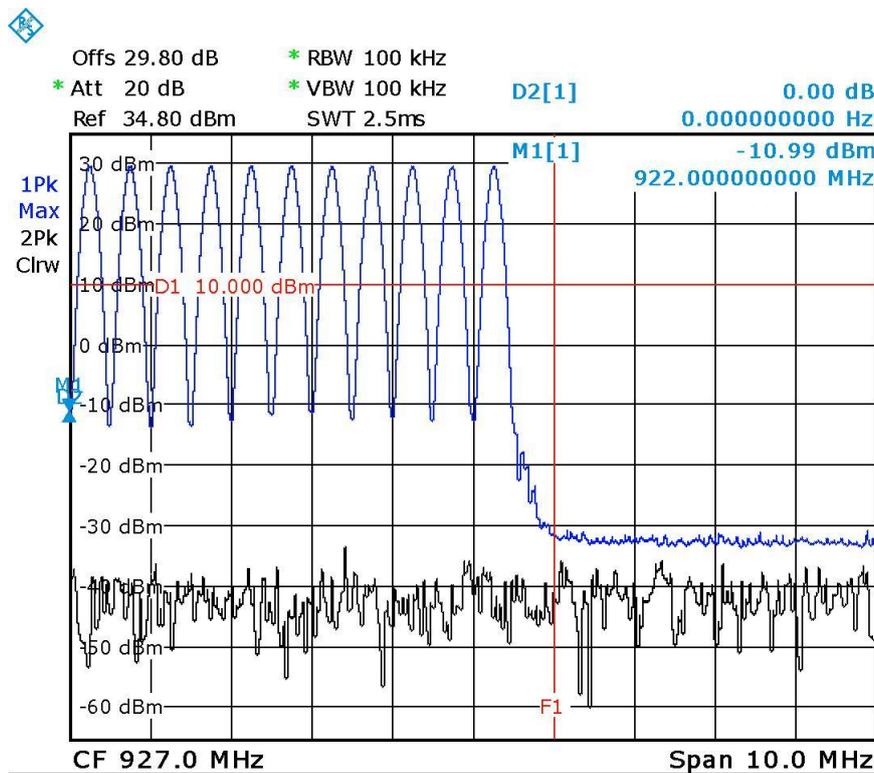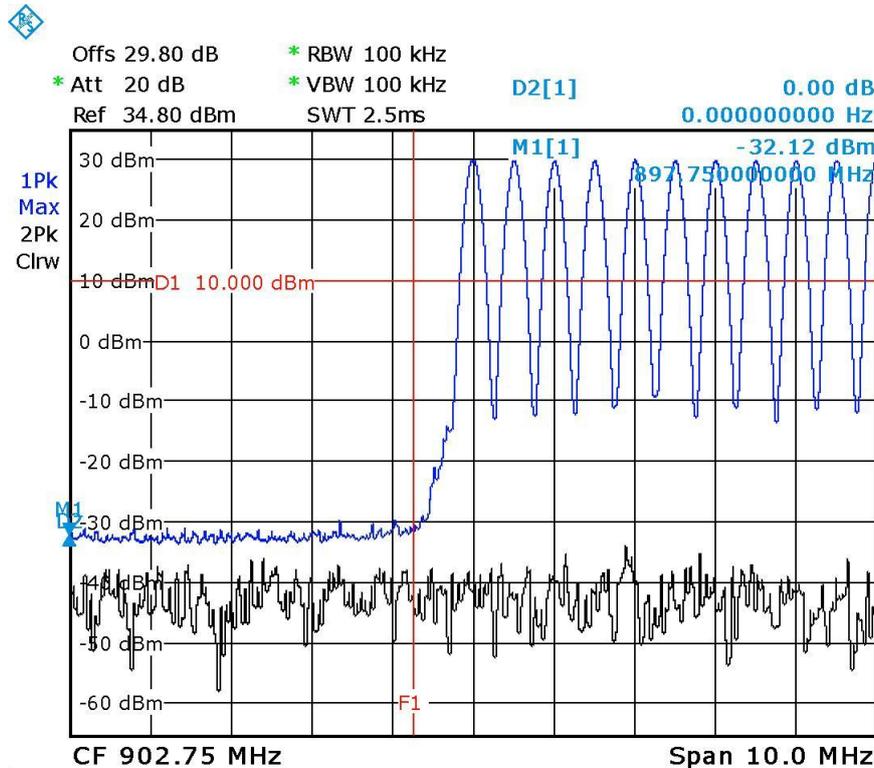

EUT: UHF Long Range Reader ID ISC.LRU 3500
FCC ID: PJMLRU3000

Date of issue: 2010-01-19

11.7 Radio frequency hazard

11.7.1 Regulation

15.247(i) Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See § 1.1307(b)(1) of this Chapter.

11.7.2 Result

MPE calculation to the FCC ID: PJMLRU3000

These equations are generally accurate in the far field of an antenna but will over predict power density in the near field, where they could be used for making a “worst case” prediction.

$$S = PG/4\pi R^2$$

where S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units e.g. mW)

G = power gain of the antenna in the direction of interest relative to the isotropic radiator

R = distance to the center of radiation of the antenna (appropriate units e.g. cm)

Or

$$S = \text{EIRP}/4\pi R^2$$

where EIRP = equivalent isotropically radiated power

Calculation:

(Calculated for max. EIRP)

EIRP: 35.9 dBm = 3890.5 mW

calculated at distance of 20 cm:

power density = $3890.5 / 4 * \pi * 20^2 = 0.774 \text{ mW/ cm}^2$

Limit:

1mW/ cm² is the reference level for general public exposure according to the OET Bulletin 65, Edition 97-01 Table 1.

EUT: UHF Long Range Reader ID ISC.LRU 3500
FCC ID: PJMLRU3000

Date of issue: 2010-01-19

11.8 Conducted limits

11.8.1 Regulation

Section 15.207 (a) For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50ohms line impedance stabilization network (LISN). Compliance with this provision of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission(MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.50	66 to 56*	56 to 46*
0.50-5.0	56	46
5.0-30.0	60	50

*Decreases with the logarithm of the frequency

Section 15.207 (c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provision for, the use of battery chargers which permit operating while charging, AC adaptors or battery eliminators or connected to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

EUT: UHF Long Range Reader ID ISC.LRU 3500
FCC ID: PJMLRU3000

Date of issue: 2010-01-19

10.8.2 Test equipment

Type	Manufacturer/ Model no.	Serial no.	Last calibration	Next calibration	Remarks
Receiver (9 kHz - 30MHz)	Schwarzbeck FMLK 1518 (428)	1518-294	06 / 2009	06 / 2011	---
Protector limiter 9 kHz - 30MHz, 10 dB	Rhode & Schwarz ESH 3Z2 (272)	357,881052	03 / 2008	03 / 2010	---
V-LISN 50 ohms//(50 uH+5 ohms)	RFT NNB 11 (72)	13835240	03 / 2007	03 / 2010	---
V-LISN 50 ohms//(50 uH+5 ohms)	emco 3810/2 LISN (49b)	---	03 / 2007	03 / 2010	---

10.8.3 Test procedures

The EUT and the additional equipment (if required) are connected to the main power through a line impedance stabilization network (LISN). The LISN must be appropriate to ANSI C63.4: 2003 Section 7.

Additional equipment must also be connected to a second LISN with the same specifications described in the above sentence (if required).

EUT: UHF Long Range Reader ID ISC.LRU 3500
FCC ID: PJMLRU3000

Date of issue: 2010-01-19

11.8.4 Test results

1.) UHF Long Range Reader ID ISC.LRU 3500 with external PoE power supply (model: PW183RD48000F07 (UL: 2L85 / E136791))

TRANSMITTER CONDUCTED EMISSIONS (Section 15.207)						
Tested line	Emission frequency [MHz]	Receiver bandwidth [kHz]	Result quasi-peak [dB μ V]	Spec. limit (average) [dB μ V]	Margin [dB]	Remarks
L1	0.1829	9	51.5	54.6	3.1	* ²
N	0.1829	9	51.5	54.6	3.1	* ²
L1	0.2059	9	45.0	54.5	9.5	* ²
N	0.2059	9	45.5	54.5	9.0	* ²
L1	0.400	9	-2	47.7	49.7	* ¹
N	0.400	9	-2	47.7	49.7	* ¹
L1	0.600	9	-2	46	48.0	* ¹
N	0.600	9	-2	46	48.0	* ¹
L1	0.775	9	-2	46	48.0	* ¹
N	0.775	9	-2	46	48.0	* ¹
L1	0.850	9	-2	46	48.0	* ¹
N	0.850	9	-2	46	48.0	* ¹
L1	1.000	9	-2	46	48.0	* ¹
N	1.000	9	-2	46	48.0	* ¹
L1	1.575	9	-2	46	48.0	* ¹
N	1.575	9	-2	46	48.0	* ¹
L1	2.450	9	-2	46	48.0	* ¹
N	2.450	9	-2	46	48.0	* ¹
L1	3.443	9	32.0	46	14.0	* ²
N	3.443	9	32.0	46	14.0	* ²
L1	4.302	9	34.5	46	11.5	* ²
N	4.302	9	34.5	46	11.5	* ²
L1	5.750	9	-2	46	48.0	* ¹
N	5.750	9	-2	46	48.0	* ¹
L1	6.300	9	-2	50	52.0	* ¹
N	6.300	9	-2	50	52.0	* ¹
L1	11.100	9	-2	50	52.0	* ¹
N	11.100	9	-2	50	52.0	* ¹
L1	20.293	9	-2	50	52.0	* ¹
N	20.293	9	-2	50	52.0	* ¹
L1	27.058	9	-2	50	52.0	* ¹
N	27.058	9	-2	50	52.0	* ¹

Remark: *¹ Noise level of the measuring instrument \leq -2dB μ V (0.009 – 30MHz)Remark: *² Quasi peak measurements lower than "Specified Average Limit"

The equipment meets the requirements	yes	no	na
--------------------------------------	-----	----	----

Further test results are attached	yes	no	page no:
-----------------------------------	-----	----	----------

EUT: UHF Long Range Reader ID ISC.LRU 3500
FCC ID: PJMLRU3000

Date of issue: 2010-01-19

2.) UHF Long Range Reader ID ISC.LRU 3500 with USB connection to an HP Laptop (Type: compaq nx6325 / SN CNU64907YN)

TRANSMITTER CONDUCTED EMISSIONS (Section 15.207)						
Tested line	Emission frequency [MHz]	Receiver bandwidth [kHz]	Result quasi-peak [dB μ V]	Spec. limit (average) [dB μ V]	Margin [dB]	Remarks
L1	0.1829	9	51.5	54.6	3.1	* ²
N	0.1829	9	51.5	54.6	3.1	* ²
L1	0.2059	9	45.0	54.5	9.5	* ²
N	0.2059	9	45.5	54.5	9.0	* ²
L1	0.400	9	-2	47.7	49.7	* ¹
N	0.400	9	-2	47.7	49.7	* ¹
L1	0.600	9	-2	46	48.0	* ¹
N	0.600	9	-2	46	48.0	* ¹
L1	0.775	9	-2	46	48.0	* ¹
N	0.775	9	-2	46	48.0	* ¹
L1	0.850	9	-2	46	48.0	* ¹
N	0.850	9	-2	46	48.0	* ¹
L1	1.000	9	-2	46	48.0	* ¹
N	1.000	9	-2	46	48.0	* ¹
L1	1.575	9	-2	46	48.0	* ¹
N	1.575	9	-2	46	48.0	* ¹
L1	2.450	9	-2	46	48.0	* ¹
N	2.450	9	-2	46	48.0	* ¹
L1	3.443	9	32.0	46	14.0	* ²
N	3.443	9	32.0	46	14.0	* ²
L1	4.302	9	34.5	46	11.5	* ²
N	4.302	9	34.5	46	11.5	* ²
L1	5.750	9	-2	46	48.0	* ¹
N	5.750	9	-2	46	48.0	* ¹
L1	6.300	9	-2	50	52.0	* ¹
N	6.300	9	-2	50	52.0	* ¹
L1	11.100	9	-2	50	52.0	* ¹
N	11.100	9	-2	50	52.0	* ¹
L1	20.293	9	-2	50	52.0	* ¹
N	20.293	9	-2	50	52.0	* ¹
L1	27.058	9	-2	50	52.0	* ¹
N	27.058	9	-2	50	52.0	* ¹

Remark: *¹ Noise level of the measuring instrument $\leq -2\text{dB}\mu\text{V}$ (0.009 – 30MHz)Remark: *² Quasi peak measurements lower than "Specified Average Limit"

The equipment meets the requirements	yes	no	na
--------------------------------------	-----	---------------	---------------

Further test results are attached	yes	no	page no:
-----------------------------------	-----	----	----------

EUT: UHF Long Range Reader ID ISC.LRU 3500
FCC ID: PJMLRU3000

Date of issue: 2010-01-19

3.) UHF Long Range Reader ID ISC.LRU 3500 with RS232 connection to an HP Laptop (Type: compaq nx6325 / SN CNU64907YN)

TRANSMITTER CONDUCTED EMISSIONS (Section 15.207)						
Tested line	Emission frequency [MHz]	Receiver bandwidth [kHz]	Result quasi-peak [dB μ V]	Spec. limit (average) [dB μ V]	Margin [dB]	Remarks
L1	0.1829	9	51.5	54.6	3.1	* ²
N	0.1829	9	51.5	54.6	3.1	* ²
L1	0.2059	9	45.0	54.5	9.5	* ²
N	0.2059	9	45.5	54.5	9.0	* ²
L1	0.400	9	-2	47.7	49.7	* ¹
N	0.400	9	-2	47.7	49.7	* ¹
L1	0.600	9	-2	46	48.0	* ¹
N	0.600	9	-2	46	48.0	* ¹
L1	0.775	9	-2	46	48.0	* ¹
N	0.775	9	-2	46	48.0	* ¹
L1	0.850	9	-2	46	48.0	* ¹
N	0.850	9	-2	46	48.0	* ¹
L1	1.000	9	-2	46	48.0	* ¹
N	1.000	9	-2	46	48.0	* ¹
L1	1.575	9	-2	46	48.0	* ¹
N	1.575	9	-2	46	48.0	* ¹
L1	2.450	9	-2	46	48.0	* ¹
N	2.450	9	-2	46	48.0	* ¹
L1	3.443	9	32.0	46	14.0	* ²
N	3.443	9	32.0	46	14.0	* ²
L1	4.302	9	34.5	46	11.5	* ²
N	4.302	9	34.5	46	11.5	* ²
L1	5.750	9	-2	46	48.0	* ¹
N	5.750	9	-2	46	48.0	* ¹
L1	6.300	9	-2	50	52.0	* ¹
N	6.300	9	-2	50	52.0	* ¹
L1	11.100	9	-2	50	52.0	* ¹
N	11.100	9	-2	50	52.0	* ¹
L1	20.293	9	-2	50	52.0	* ¹
N	20.293	9	-2	50	52.0	* ¹
L1	27.058	9	-2	50	52.0	* ¹
N	27.058	9	-2	50	52.0	* ¹

Remark: *¹ Noise level of the measuring instrument $\leq -2\text{dB}\mu\text{V}$ (0.009 – 30MHz)Remark: *² Quasi peak measurements lower than "Specified Average Limit"

The equipment meets the requirements	yes	no	na
--------------------------------------	-----	---------------	---------------

Further test results are attached	yes	no	page no:
-----------------------------------	-----	----	----------

EUT: UHF Long Range Reader ID ISC.LRU 3500
FCC ID: PJMLRU3000

Date of issue: 2010-01-19

12. Additional information to the test report

Remarks

- n.t.¹ Not tested, because the antenna is part of the PCB
- n.t.² Not tested, because the EUT is directly battery powered

EUT: UHF Long Range Reader ID ISC.LRU 3500
FCC ID: PJMLRU3000

Date of issue: 2010-01-19

End of test report