



**FCC CFR47 PART 15 SUBPART C
CERTIFICATION
TEST REPORT**

FOR

POINT-TO-POINT WIRELESS INTERNET SYSTEM

BRAND NAME: ARCXtend MetroE

MODEL NUMBER: FX5010-SM-PD

MODEL SERIES: FX5010*

FCC ID: PLRFX501000

REPORT NUMBER: 06U10341-1

ISSUE DATE: SEPTEMBER 5, 2006

Prepared for
ARCWAVE, INC
100 ALBRIGHT WAY, SUITE A
LOS GATOS, CA 95032, USA

Prepared by
COMPLIANCE CERTIFICATION SERVICES
561F MONTEREY ROAD
MORGAN HILL, CA 95037, USA
TEL: (408) 463-0885
FAX: (408) 463-0888

**: Details of specific model(s) tested and model differences are identified in the body of report.*



Revision History

Rev.	Issue Date	Revisions	Revised By
--	9/5/06	Initial Issue	A. Ilarina

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY.....	5
4.1. MEASURING INSTRUMENT CALIBRATION.....	5
4.2. MEASUREMENT UNCERTAINTY.....	5
5. EQUIPMENT UNDER TEST.....	6
5.1. DESCRIPTION OF EUT	6
5.2. MANUFACTURER'S DESCRIPTION OF MODEL DIFFERENCES.....	6
5.3. MAXIMUM OUTPUT POWER	6
5.4. DESCRIPTION OF AVAILABLE ANTENNAS.....	6
5.5. SOFTWARE AND FIRMWARE	6
5.6. WORST-CASE CONFIGURATION AND MODE.....	6
5.7. DESCRIPTION OF TEST SETUP	7
6. TEST AND MEASUREMENT EQUIPMENT	9
7. LIMITS AND RESULTS	10
7.1. CHANNEL TESTS FOR THE 5725 TO 5850 MHz BAND	10
7.1.1. 6 dB BANDWIDTH	10
7.1.2. 99% BANDWIDTH.....	14
7.1.3. PEAK OUTPUT POWER	18
7.1.4. AVERAGE POWER.....	23
7.1.5. MAXIMUM PERMISSIBLE EXPOSURE.....	24
7.1.6. PEAK POWER SPECTRAL DENSITY	27
7.1.7. CONDUCTED SPURIOUS EMISSIONS.....	31
7.2. RADIATED EMISSIONS.....	38
7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS	38
7.2.2. TRANSMITTER ABOVE 1 GHz FOR 5725 TO 5850 MHz BAND	40
7.2.3. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz.....	41
7.3. POWERLINE CONDUCTED EMISSIONS	49
8. SETUP PHOTOS.....	56

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: ARCWAVE, INC
100 ALBRIGH WAY, SUITE A
LOS GATOS, CA 95032, USA

EUT DESCRIPTION: POINT-TO-POINT WIRELESS INTERNET SYSTEM

MODEL TESTED: FX5010-SM-PD

SERIAL NUMBER: 01794

DATE TESTED: JUNE 26 TO AUGUST 08, 2006

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.


Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:

Tested By:



ALVIN ILARINA
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES



WILLIAM ZHUANG
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is an 802.11a based transceiver.

5.2. MANUFACTURER'S DESCRIPTION OF MODEL DIFFERENCES

There are two model versions under the FX5010 model series, the following table shows the model differences.

Model Number	Model Differences
FX5010-VM-PD	When shipped with vertical mount hardware
FX5010-SM-PD	When shipped with horizontal mount hardware

5.3. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

5725 to 5850 MHz Authorized Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5745 - 5825	802.11a	20.06	101.39

5.4. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an integrated single sector 20° Patch antenna, with a maximum gain of 18 dBi.

5.5. SOFTWARE AND FIRMWARE

The test utility software used in the support laptop to control the radio.

5.6. WORST-CASE CONFIGURATION AND MODE

The worst-case channel is determined as the channel with the highest output power. The highest measured output power was at 5825 MHz.

5.7. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST			
Description	Manufacturer	Model	Serial Number
P3 Laptop, Windows XP SP2	Dell Computers	PP01L	TW-0791UH-12800-0B2-3731
AC / DC Power inserter	Toner	TGP1	NA
+18VDC, 500mA Wallwart	Group West	48D-18-500	NA


I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	2	US 115V	Un-shielded	2m	
2	DC	1	DC Plug	Un-shielded	2m	
3	OUT	1	RJ45	Un-shielded	.5m	
4	IN	1	RJ45	Un-shielded	4m	To remote laptop

TEST SETUP

The EUT is connected to a host laptop that controls the function of the radio.

SETUP DIAGRAM FOR TESTS

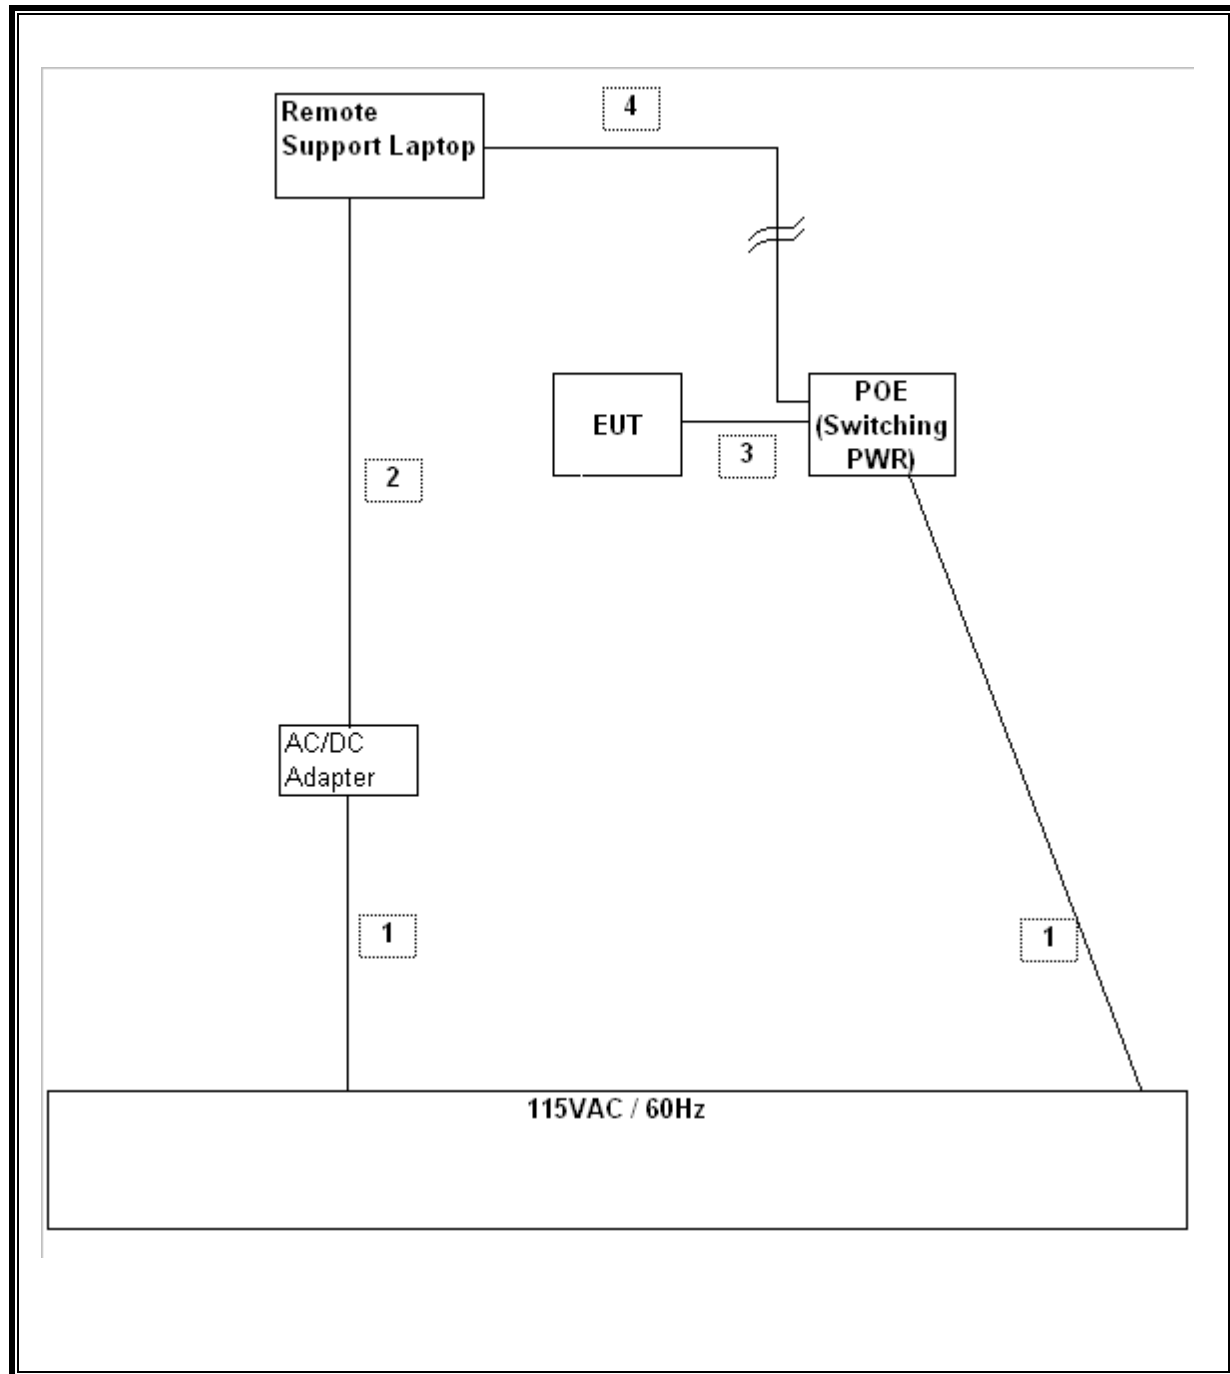

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
Peak Power Meter	Agilent / HP	E4416A	GB41291160	12/2/2007
Peak / Average Power Sensor	Agilent	E9327A	US40440755	12/2/2007
Spectrum Analyzer 3 Hz ~ 44 GHz	Agilent / HP	E4446A	MY43360112	5/3/2007
Antenna, Horn 1 ~ 18 GHz	EMCO	3115	6717	4/22/2007
Preamplifier, 1 ~ 26.5 GHz	Agilent / HP	8449B	3008A00931	6/24/2007
EMI Receiver, 9 kHz ~ 2.9 GHz	Agilent / HP	8542E	3942A00286	2/4/2007
RF Filter Section	Agilent / HP	85420E	3705A00256	2/4/2007
Antenna, Bilog 30 MHz ~ 2 Ghz	Sunol Sciences	JB1	A121003	9/3/2006
EMI Test Receiver	R & S	ESHS 20	827129/006	6/3/2007
LISN, 10 kHz ~ 30 MHz	FCC	LISN-50/250-25-2	2023	8/30/2006

7. LIMITS AND RESULTS

7.1. CHANNEL TESTS FOR THE 5725 TO 5850 MHz BAND

7.1.1. 6 dB BANDWIDTH

LIMIT

§15.247 (a) (2) For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.


RESULTS


No non-compliance noted:


802.11a Mode

Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	5745	16583.333	500	16083
Middle	5785	16583.333	500	16083
High	5825	16583.333	500	16083

6 DB BANDWIDTH (802.11a MODE)

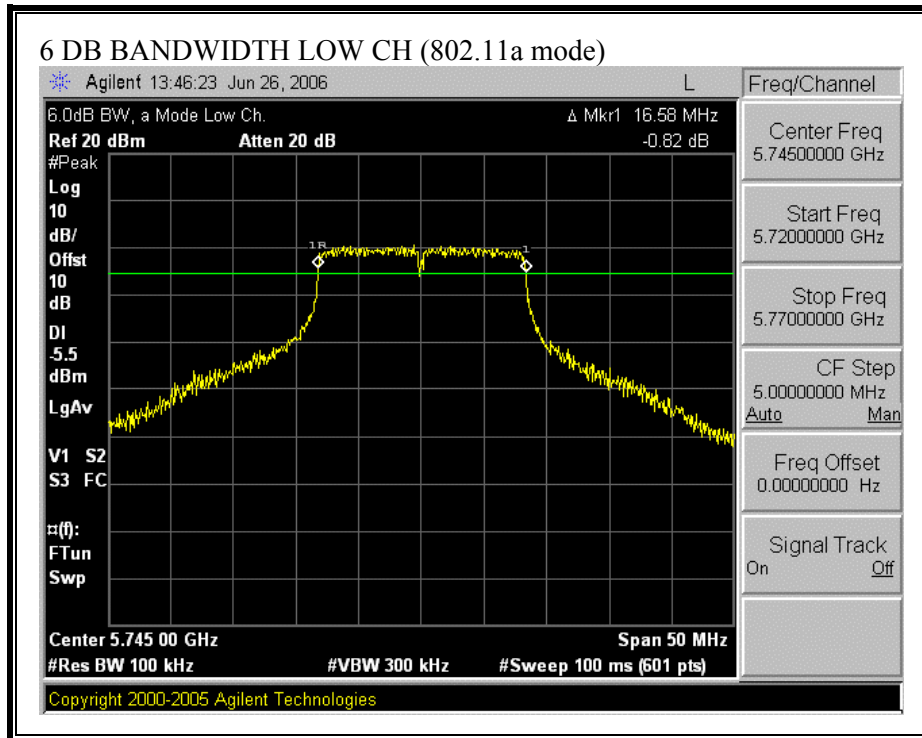

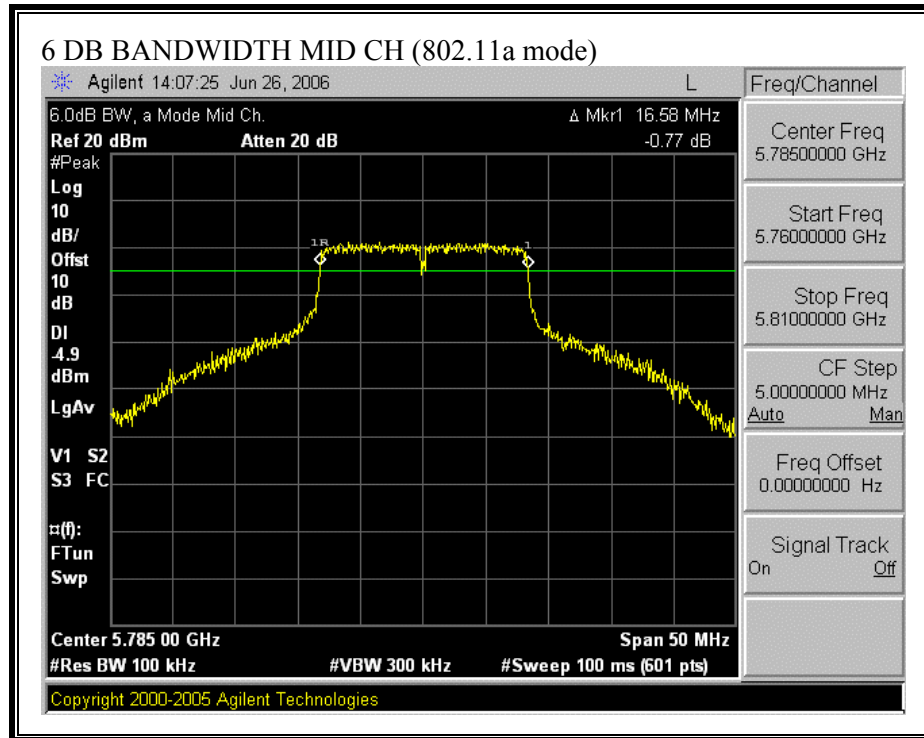

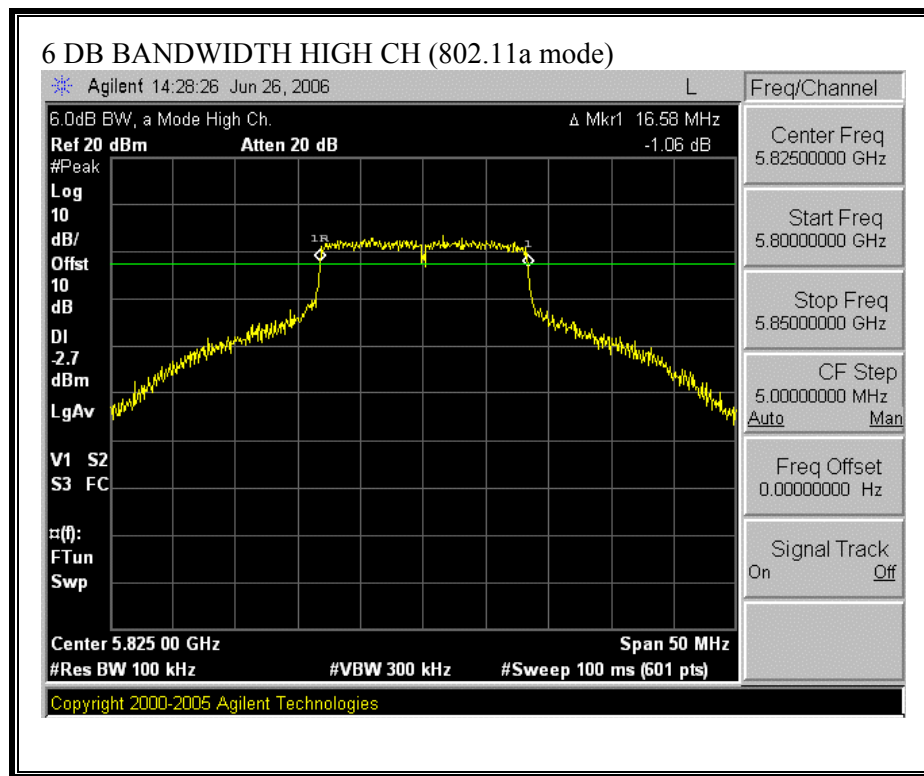

7.1.2. 99% BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.


RESULTS


No non-compliance noted:


802.11a Mode

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5745	25.605	16.477
Middle	5785	32.013	16.528
High	5825	32.71	17.069

99% BANDWIDTH (802.11a MODE)

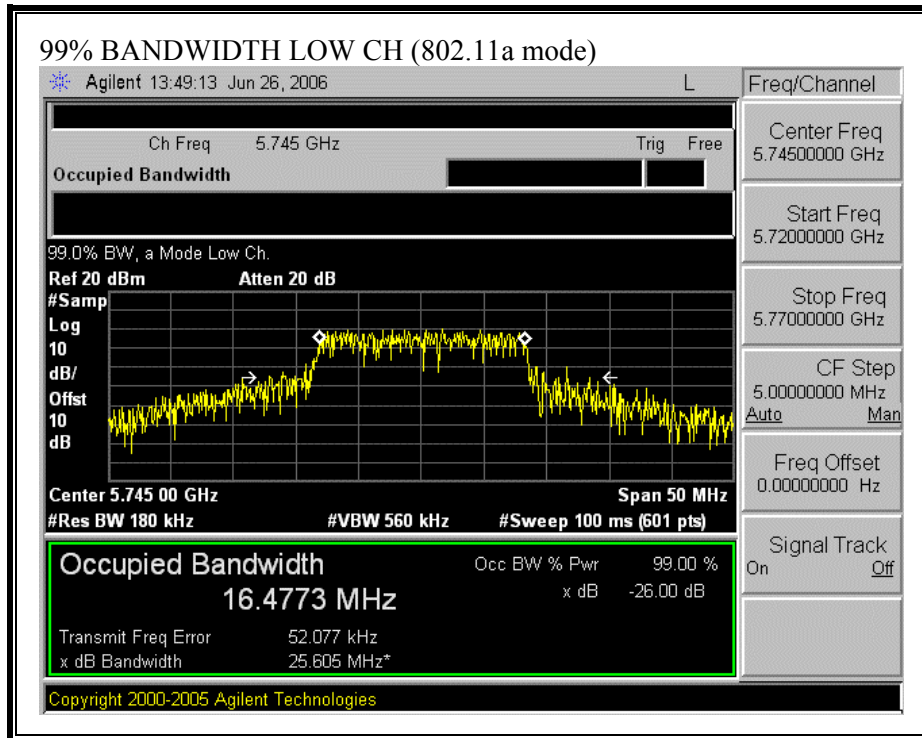

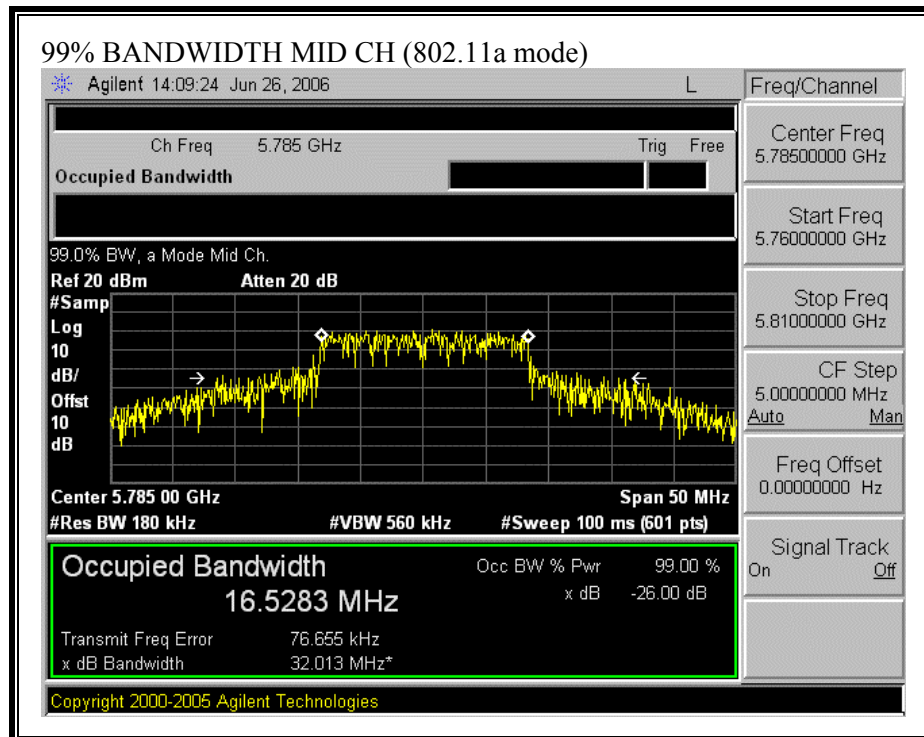

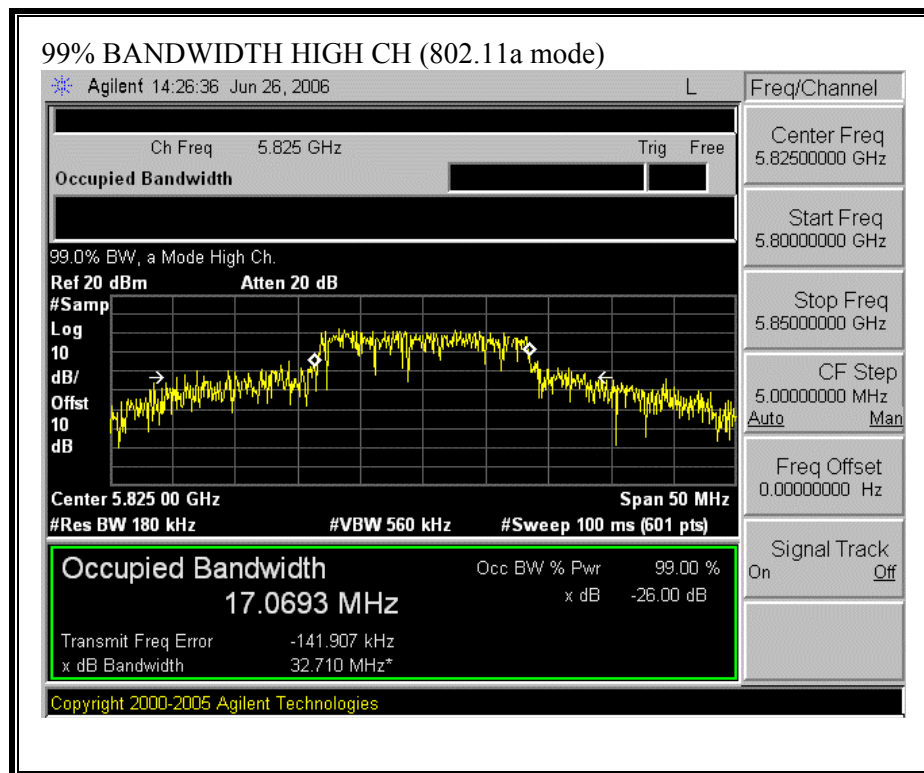

7.1.3. PEAK OUTPUT POWER

PEAK POWER LIMIT

§15.247 (b) The maximum peak output power of the intentional radiator shall not exceed the following:

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz , and 5725-5850 MHz bands: 1 watt.

§15.247 (b) (4) Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

§15.247 (b) (4) (ii) Systems operating in the 5725–5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer and the analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth.

RESULTS


The maximum antenna gain is 18 dBi exclusively for fixed, point-to-point operations, therefore the limit is 30 dBm.


No non-compliance noted:


802.11a Mode

Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	5745	17.92	30	-12.08
Middle	5785	18.71	30	-11.29
High	5825	20.06	30	-9.94

OUTPUT POWER (802.11a MODE)

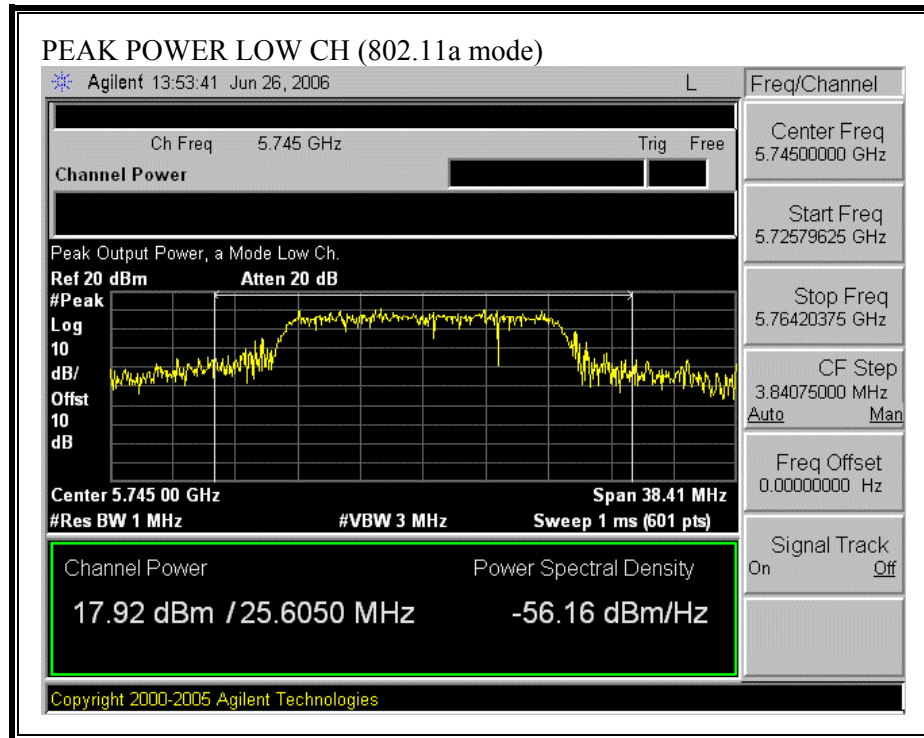



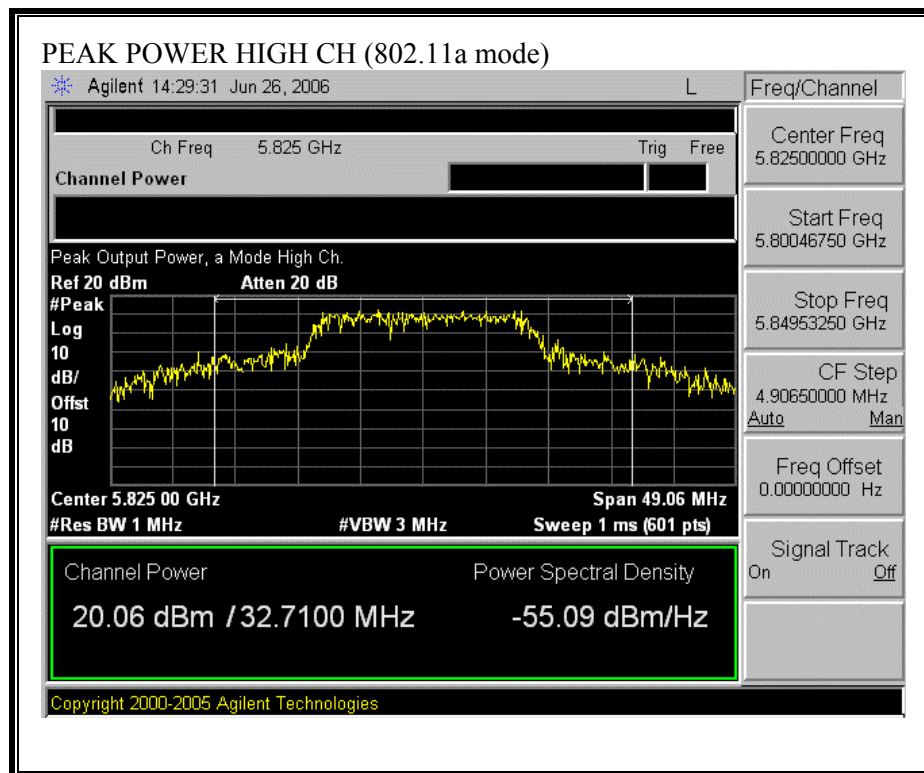

7.1.4. AVERAGE POWER

AVERAGE POWER LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

No non-compliance noted:

The cable assembly insertion loss of 10 dB (including 10 dB pad and 0 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

802.11a Mode

Channel	Frequency (MHz)	Average Power (dBm)
Low	5745	14.40
Middle	5785	15.45
High	5825	16.55

7.1.5. MAXIMUM PERMISSIBLE EXPOSURE

LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500			f/300	6
1500–100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500			f/1500	30
1500–100,000			1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

CALCULATIONS

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations and rearranging the terms to express the distance as a function of the remaining variables yields:

$$d = \sqrt{((30 * P * G) / (3770 * S))}$$

Changing to units of Power to mW and Distance to cm, using:

$$P \text{ (mW)} = 1000 * P \text{ (W)} \text{ and}$$

$$d \text{ (cm)} = 100 * d \text{ (m)}$$

yields

$$d = 100 * \sqrt{((30 * (P / 1000) * G) / (3770 * S))}$$

$$d = 0.282 * \sqrt{(P * G / S)}$$

where

d = distance in cm

P = Power in mW

G = Numeric antenna gain

S = Power Density in mW/cm²

Substituting the logarithmic form of power and gain using:

$$P \text{ (mW)} = 10^{(P \text{ (dBm)} / 10)} \text{ and}$$

$$G \text{ (numeric)} = 10^{(G \text{ (dBi)} / 10)}$$

yields

$$d = 0.282 * 10^{((P + G) / 20)} / \sqrt{S}$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm²

Rearranging terms to calculate the power density at a specific distance yields

$$S = 0.0795 * 10^{((P + G) / 10)} / (d^2)$$

LIMITS

From §1.1310 Table 1 (B), the maximum value of $S = 1.0 \text{ mW/cm}^2$

RESULTS

No non-compliance noted:

Mode	Power Density Limit (mW/cm²)	Output Power (dBm)	Antenna Gain (dBi)	MPE Distance (cm)
802.11a	1.0	20.06	18.00	22.56

7.1.6. PEAK POWER SPECTRAL DENSITY

LIMIT

§15.247 (d) For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer, the maximum level in a 3 kHz bandwidth is measured with the spectrum analyzer using RBW = 3 kHz and VBW > 3 kHz, sweep time = span / 3 kHz, and video averaging is turned off. The PPSD is the highest level found across the emission in any 3 kHz band.


RESULTS


No non-compliance noted:


802.11a Mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	5745	-7.23	8	-15.23
Middle	5785	-7.45	8	-15.45
High	5825	-4.82	8	-12.82

PEAK POWER SPECTRAL DENSITY (802.11a MODE)

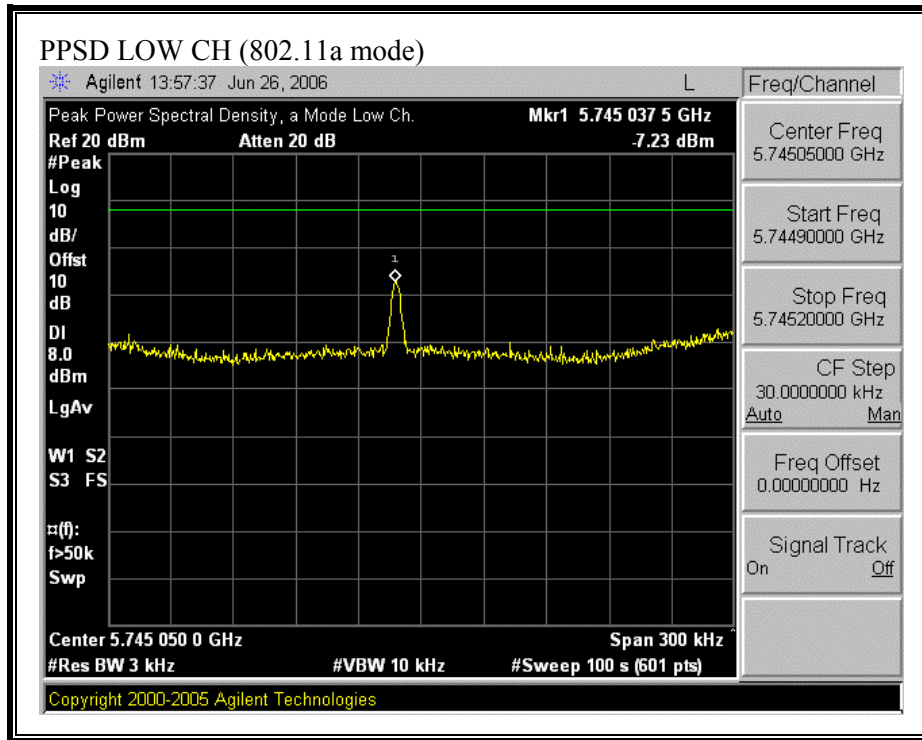

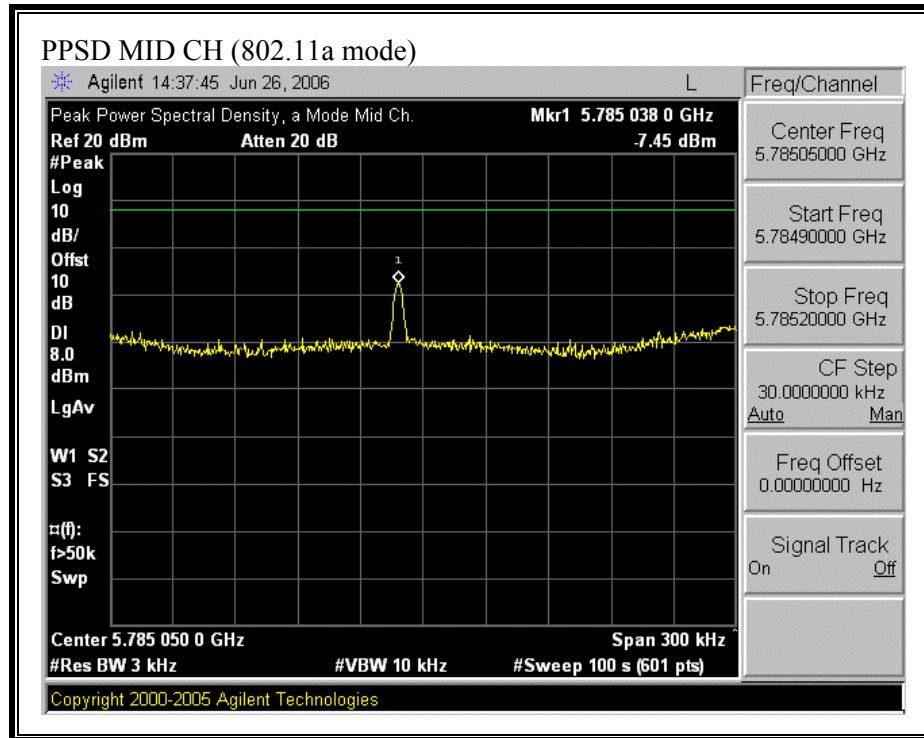

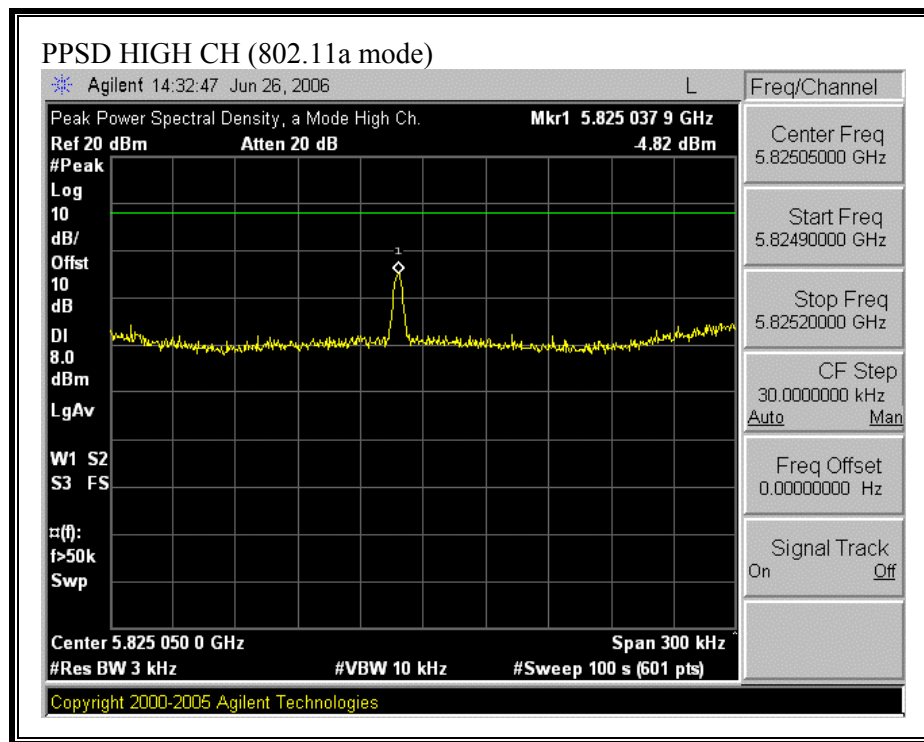

7.1.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

§15.247 (c) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.


RESULTS

No non-compliance noted:


SPURIOUS EMISSIONS, LOW CHANNEL (802.11a MODE)

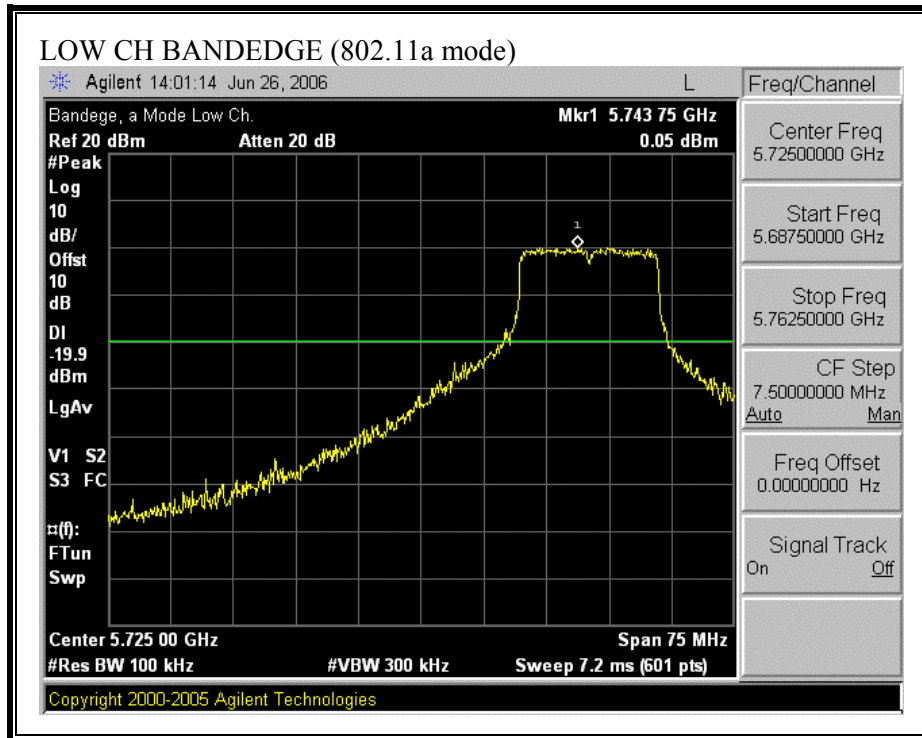


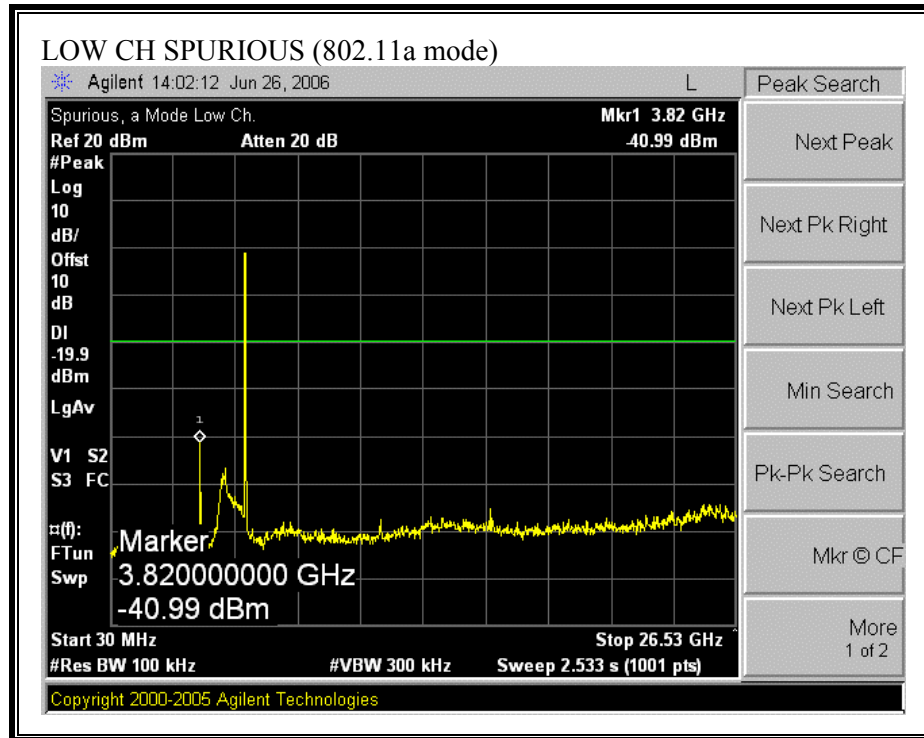

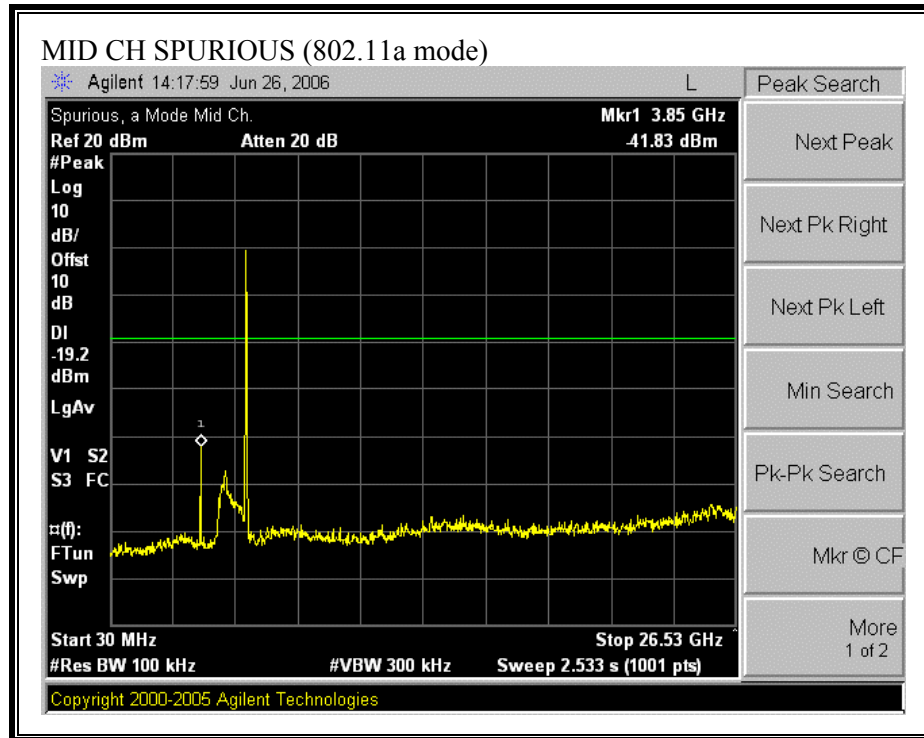

SPURIOUS EMISSIONS, HIGH CHANNEL (802.11a MODE)

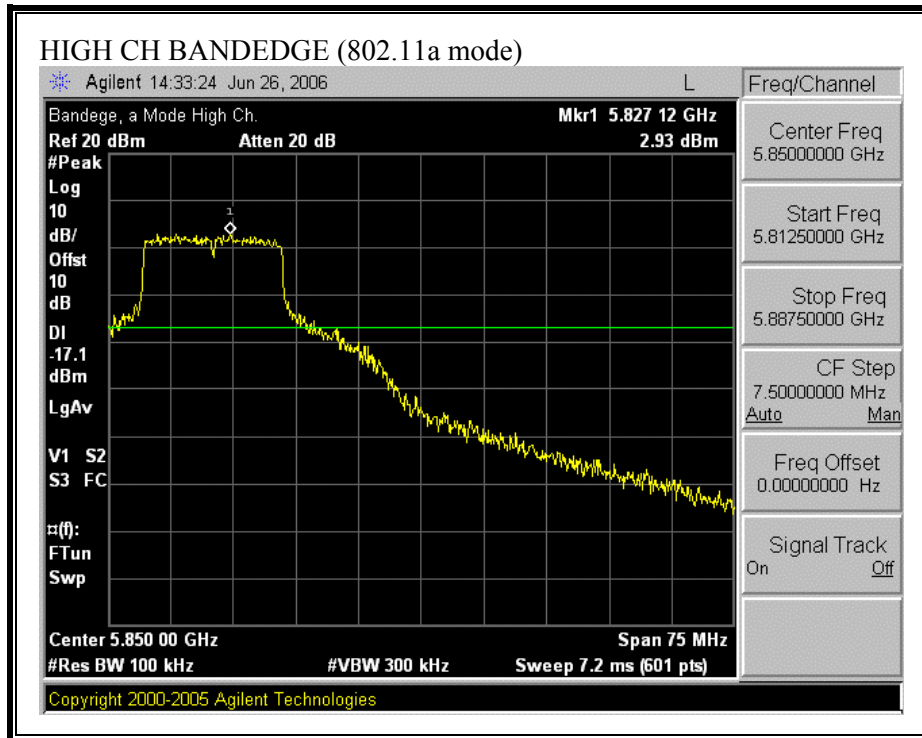

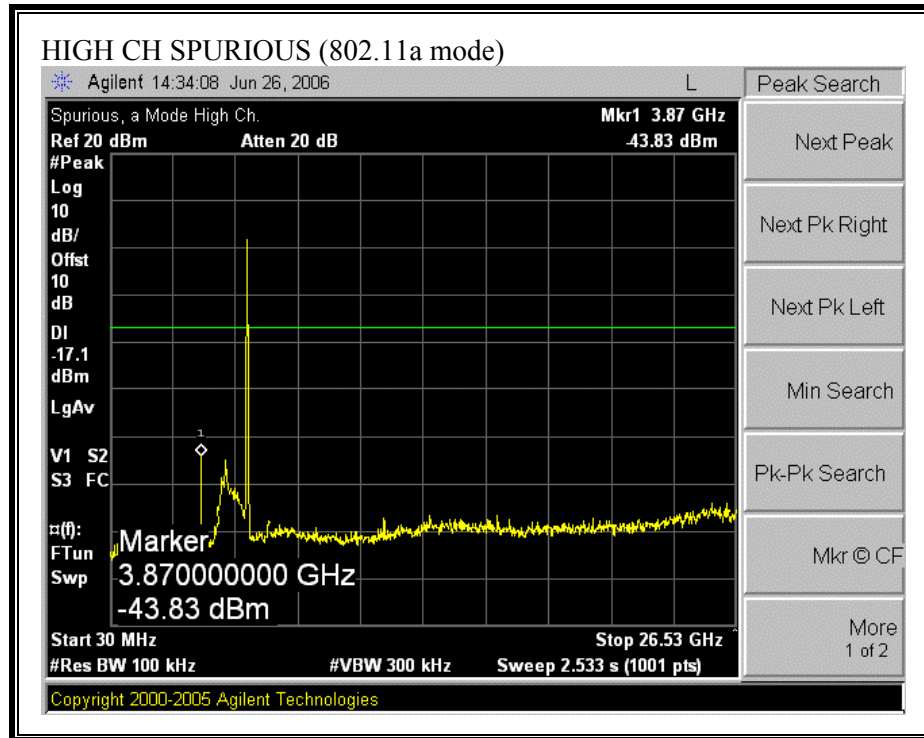

7.2. RADIATED EMISSIONS

7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each 5 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

7.2.2. TRANSMITTER ABOVE 1 GHz FOR 5725 TO 5850 MHz BAND

HARMONICS AND SPURIOUS EMISSIONS (802.11a MODE)

High Frequency Measurement																																																																																																																																																																																			
Compliance Certification Services, Morgan Hill Open Field Site																																																																																																																																																																																			
Company:ARCWAVE																																																																																																																																																																																			
Project #:06U10341																																																																																																																																																																																			
Date:06/26/06																																																																																																																																																																																			
Test Engineer:William Zhuang																																																																																																																																																																																			
Configuration:Continuous Transmit Mode																																																																																																																																																																																			
Mode:5.725 - 5.850 Point to Point Wireless Internet System																																																																																																																																																																																			
Average Power Meter: Low = xx dBm, Mid = xx dBm, High = xx dBm																																																																																																																																																																																			
Test Equipment:																																																																																																																																																																																			
Horn 1-18GHz			Pre-amplifier 1-26GHz			Pre-amplifier 26-40GHz			Horn > 18GHz			Limit																																																																																																																																																																							
T73; SIN: 6717 @3m			T144 Miteq 3008A00931									FCC 15.205																																																																																																																																																																							
Hi Frequency Cables																																																																																																																																																																																			
2 foot cable			3 foot cable			12 foot cable			HPF			Reject Filter																																																																																																																																																																							
William 177079009						William 187209004						R_002																																																																																																																																																																							
<table border="1"> <thead> <tr> <th>f GHz</th> <th>Dist (m)</th> <th>Read Pk dBuV</th> <th>Read Avg. dBuV</th> <th>AF dB/m</th> <th>CL dB</th> <th>Amp dB</th> <th>D Corr dB</th> <th>Filtr dB</th> <th>Peak dBuV/m</th> <th>Avg dBuV/m</th> <th>Pk Lim dBuV/m</th> <th>Avg Lim dBuV/m</th> <th>Pk Mar dB</th> <th>Avg Mar dB</th> <th>Notes (V/H)</th> </tr> </thead> <tbody> <tr> <td colspan="17">High Ch. 5825MHz</td> </tr> <tr> <td>11.650</td> <td>3.0</td> <td>53.0</td> <td>38.6</td> <td>37.5</td> <td>5.3</td> <td>-35.7</td> <td>0.0</td> <td>0.0</td> <td>60.1</td> <td>45.7</td> <td>74</td> <td>54</td> <td>-13.9</td> <td>-8.3</td> <td>V</td> </tr> <tr> <td>11.650</td> <td>3.0</td> <td>48.9</td> <td>35.8</td> <td>37.5</td> <td>5.3</td> <td>-35.7</td> <td>0.0</td> <td>0.0</td> <td>56.0</td> <td>42.9</td> <td>74</td> <td>54</td> <td>-18.0</td> <td>-11.1</td> <td>H</td> </tr> <tr> <td colspan="17">Mid Ch. 5785MHz</td> </tr> <tr> <td>11.570</td> <td>3.0</td> <td>48.8</td> <td>34.5</td> <td>37.5</td> <td>5.3</td> <td>-35.8</td> <td>0.0</td> <td>0.0</td> <td>55.8</td> <td>41.5</td> <td>74</td> <td>54</td> <td>-18.2</td> <td>-12.5</td> <td>V</td> </tr> <tr> <td>11.570</td> <td>3.0</td> <td>48.1</td> <td>35.7</td> <td>37.5</td> <td>5.3</td> <td>-35.8</td> <td>0.0</td> <td>0.0</td> <td>55.1</td> <td>42.7</td> <td>74</td> <td>54</td> <td>-18.9</td> <td>-11.3</td> <td>H</td> </tr> <tr> <td colspan="17">Low Ch. 5745MHz</td> </tr> <tr> <td>11.490</td> <td>3.0</td> <td>50.1</td> <td>36.7</td> <td>37.5</td> <td>5.3</td> <td>-35.9</td> <td>0.0</td> <td>0.0</td> <td>57.0</td> <td>43.5</td> <td>74</td> <td>54</td> <td>-17.0</td> <td>-10.5</td> <td>V</td> </tr> <tr> <td>11.490</td> <td>3.0</td> <td>51.6</td> <td>37.9</td> <td>37.5</td> <td>5.3</td> <td>-35.9</td> <td>0.0</td> <td>0.0</td> <td>58.5</td> <td>44.7</td> <td>74</td> <td>54</td> <td>-15.5</td> <td>-9.3</td> <td>H</td> </tr> </tbody> </table>																	f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	High Ch. 5825MHz																	11.650	3.0	53.0	38.6	37.5	5.3	-35.7	0.0	0.0	60.1	45.7	74	54	-13.9	-8.3	V	11.650	3.0	48.9	35.8	37.5	5.3	-35.7	0.0	0.0	56.0	42.9	74	54	-18.0	-11.1	H	Mid Ch. 5785MHz																	11.570	3.0	48.8	34.5	37.5	5.3	-35.8	0.0	0.0	55.8	41.5	74	54	-18.2	-12.5	V	11.570	3.0	48.1	35.7	37.5	5.3	-35.8	0.0	0.0	55.1	42.7	74	54	-18.9	-11.3	H	Low Ch. 5745MHz																	11.490	3.0	50.1	36.7	37.5	5.3	-35.9	0.0	0.0	57.0	43.5	74	54	-17.0	-10.5	V	11.490	3.0	51.6	37.9	37.5	5.3	-35.9	0.0	0.0	58.5	44.7	74	54	-15.5	-9.3	H
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)																																																																																																																																																																				
High Ch. 5825MHz																																																																																																																																																																																			
11.650	3.0	53.0	38.6	37.5	5.3	-35.7	0.0	0.0	60.1	45.7	74	54	-13.9	-8.3	V																																																																																																																																																																				
11.650	3.0	48.9	35.8	37.5	5.3	-35.7	0.0	0.0	56.0	42.9	74	54	-18.0	-11.1	H																																																																																																																																																																				
Mid Ch. 5785MHz																																																																																																																																																																																			
11.570	3.0	48.8	34.5	37.5	5.3	-35.8	0.0	0.0	55.8	41.5	74	54	-18.2	-12.5	V																																																																																																																																																																				
11.570	3.0	48.1	35.7	37.5	5.3	-35.8	0.0	0.0	55.1	42.7	74	54	-18.9	-11.3	H																																																																																																																																																																				
Low Ch. 5745MHz																																																																																																																																																																																			
11.490	3.0	50.1	36.7	37.5	5.3	-35.9	0.0	0.0	57.0	43.5	74	54	-17.0	-10.5	V																																																																																																																																																																				
11.490	3.0	51.6	37.9	37.5	5.3	-35.9	0.0	0.0	58.5	44.7	74	54	-15.5	-9.3	H																																																																																																																																																																				

7.2.3. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION WITH AC VIA COAX, HORIZONTAL)


HORIZONTAL PLOT



561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 9 File#: Bmi.emi

Date: 06-27-2006 Time: 13:44:08

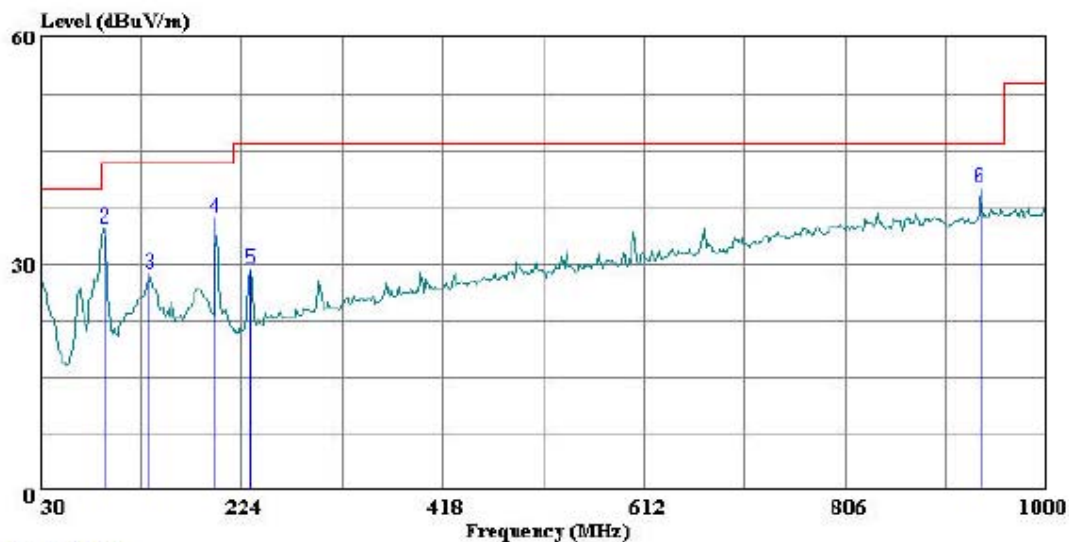

(Auxiliary ATC)

Trace: 8

Ref Trace:

Condition: FCC CLASS-B HORIZONTAL
Test Operator: : William Zhuang
Company: : ARCWAVE
Project #: : 06U10341
Model: : ARCxtend MetroE
Configuration: : EUT with AC via Coax
Mode of Operation: TX (Worst Case)

HORIZONTAL DATA

Page: 1

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	30.970	7.36	20.45	27.81	40.00	-12.19	Peak
2	92.080	25.32	9.31	34.63	43.50	-8.87	Peak
3	135.730	13.65	14.96	28.61	43.50	-14.89	Peak
4	198.780	21.79	14.37	36.16	43.50	-7.34	Peak
5	232.730	16.21	13.17	29.38	46.00	-16.62	Peak
6	935.980	13.68	26.33	40.01	46.00	-5.99	Peak


SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION WITH AC VIA COAX, VERTICAL)

VERTICAL PLOT



561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 7 File#: Emi.emi Date: 06-27-2006 Time: 13:34:51

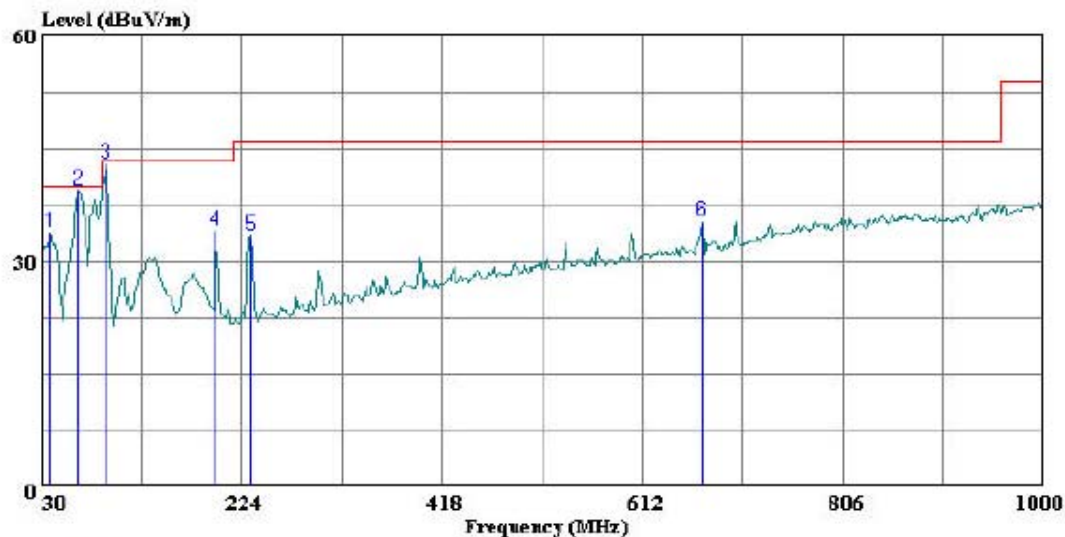

(Auxiliary ATC)

Trace: 6

Ref Trace:

Condition: FCC CLASS-B VERTICAL
Test Operator: : William Zhuang
Company: : ARCWAVE
Project #: : 06U10341
Model: : ARCxtend MetroE
Configuration: : EUT with AC via Coax
Mode of Operation: TX (Worst Case)

VERTICAL DATA

Page: 1

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	38.730	17.75	16.12	33.87	40.00	-6.13	Peak
2	65.890	30.40	9.09	39.49	40.00	-0.51	Peak
3	92.080	33.68	9.31	42.99	43.50	-0.51	Peak
4	198.780	19.64	14.37	34.01	43.50	-9.49	Peak
5	232.730	20.29	13.17	33.46	46.00	-12.54	Peak
6	669.230	12.64	22.65	35.29	46.00	-10.71	Peak


SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, WITH POE ADAPTOR, HORIZONTAL)

HORIZONTAL PLOT



561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 40 File#: Em arcwave1.emi Date: 08-08-2006 Time: 12:36:00

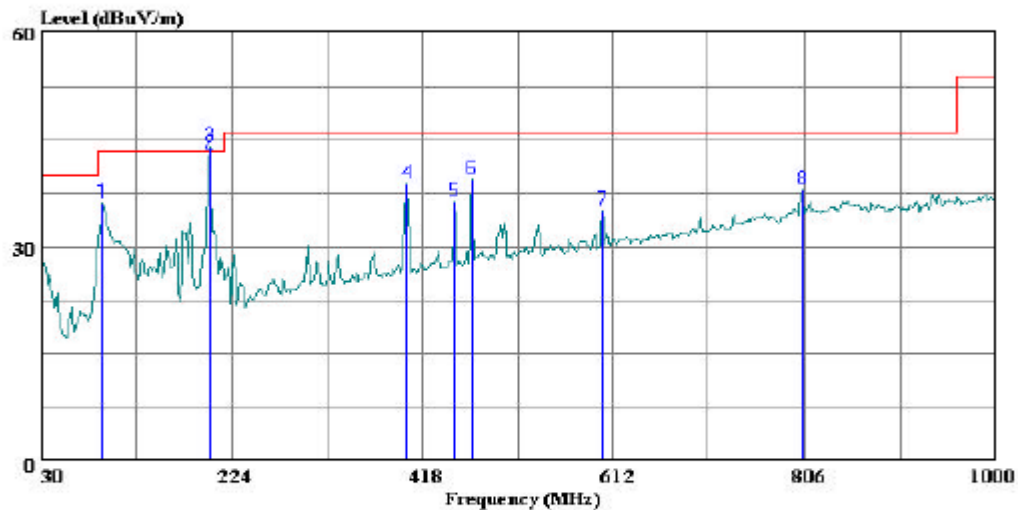

(Auxiliary ATC)

Trace: 37

Ref Trace:

Condition: FCC CLASS-B HORIZONTAL
Test Operator: : ThanhNguyen
Company: : ARCWAVE
Project #: : 06U10341
Model: : ARCxtend MetroE
Configuration: : EUT ,POE and Grounded Chassis
Mode of Operation: TX (Worst Case)

HORIZONTAL DATA

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	92.080	26.72	9.31	36.03	43.50	-7.47	Peak
2	201.690	28.60	14.32	42.92	43.50	-0.58	QP
3 *	201.690	29.63	14.32	43.95	43.50	0.45	Peak
4	402.480	20.73	18.11	38.84	46.00	-7.16	Peak
5	450.980	17.13	19.20	36.33	46.00	-9.67	Peak
6	468.440	19.80	19.61	39.41	46.00	-6.59	Peak
7	601.330	13.61	21.50	35.11	46.00	-10.89	Peak
8	803.090	13.42	24.59	38.01	46.00	-7.99	Peak


SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, WITH POE ADAPTOR, VERTICAL)

VERTICAL PLOT



561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 36 File#: Em arcwave1.emi Date: 08-08-2006 Time: 12:26:22

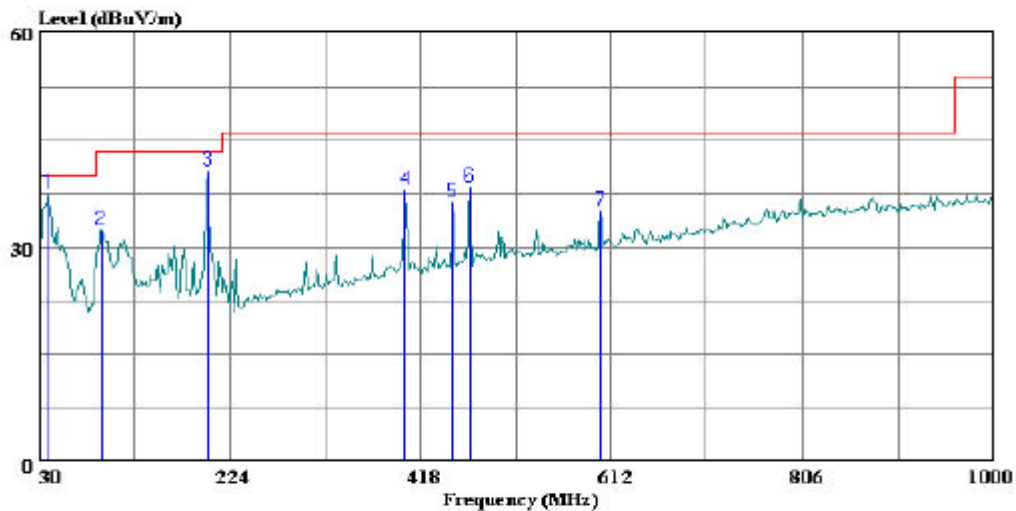

(Auxiliary ATC)

Trace: 35

Ref Trace:

Condition: FCC CLASS-B VERTICAL
Test Operator: : ThanhNguyen
Company: : ARCWAVE
Project #: : 06U10341
Model: : ARCXtend MetroE
Configuration: : EUT ,POE and Grounded Chassis
Mode of Operation: TX (Worst Case)

VERTICAL DATA

		Read			Limit	Over	
	Freq	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	38.730	21.55	16.12	37.67	40.00	-2.33	Peak
2	93.050	22.73	9.58	32.31	43.50	-11.19	Peak
3	201.690	26.39	14.32	40.71	43.50	-2.79	Peak
4	402.480	19.96	18.11	38.07	46.00	-7.93	Peak
5	450.980	17.11	19.20	36.31	46.00	-9.69	Peak
6	468.440	18.86	19.61	38.47	46.00	-7.53	Peak
7	601.330	13.52	21.50	35.02	46.00	-10.98	Peak

7.3. POWERLINE CONDUCTED EMISSIONS

LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS


No non-compliance noted:

6 WORST EMISSIONS


EUT with AC via Coax

Line Conduction, EUT with AC via Coax:									
CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq.	Reading			Closs	Limit	FCC_B	Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.18	32.18	--	21.06	0.00	64.53	54.53	-32.35	-33.47	L1
18.62	42.08	--	41.17	0.00	60.00	50.00	-17.92	-8.83	L1
21.83	49.18	--	48.29	0.00	60.00	50.00	-10.82	-1.71	L1
0.18	31.62	--	20.53	0.00	64.30	54.30	-32.68	-33.77	L2
21.04	50.34	--	49.61	0.00	60.00	50.00	-9.66	-0.39	L2
21.83	52.22	--	48.90	0.00	60.00	50.00	-7.78	-1.10	L2
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
6 Worst Data									

LINE 1 RESULTS, EUT with AC via Coax

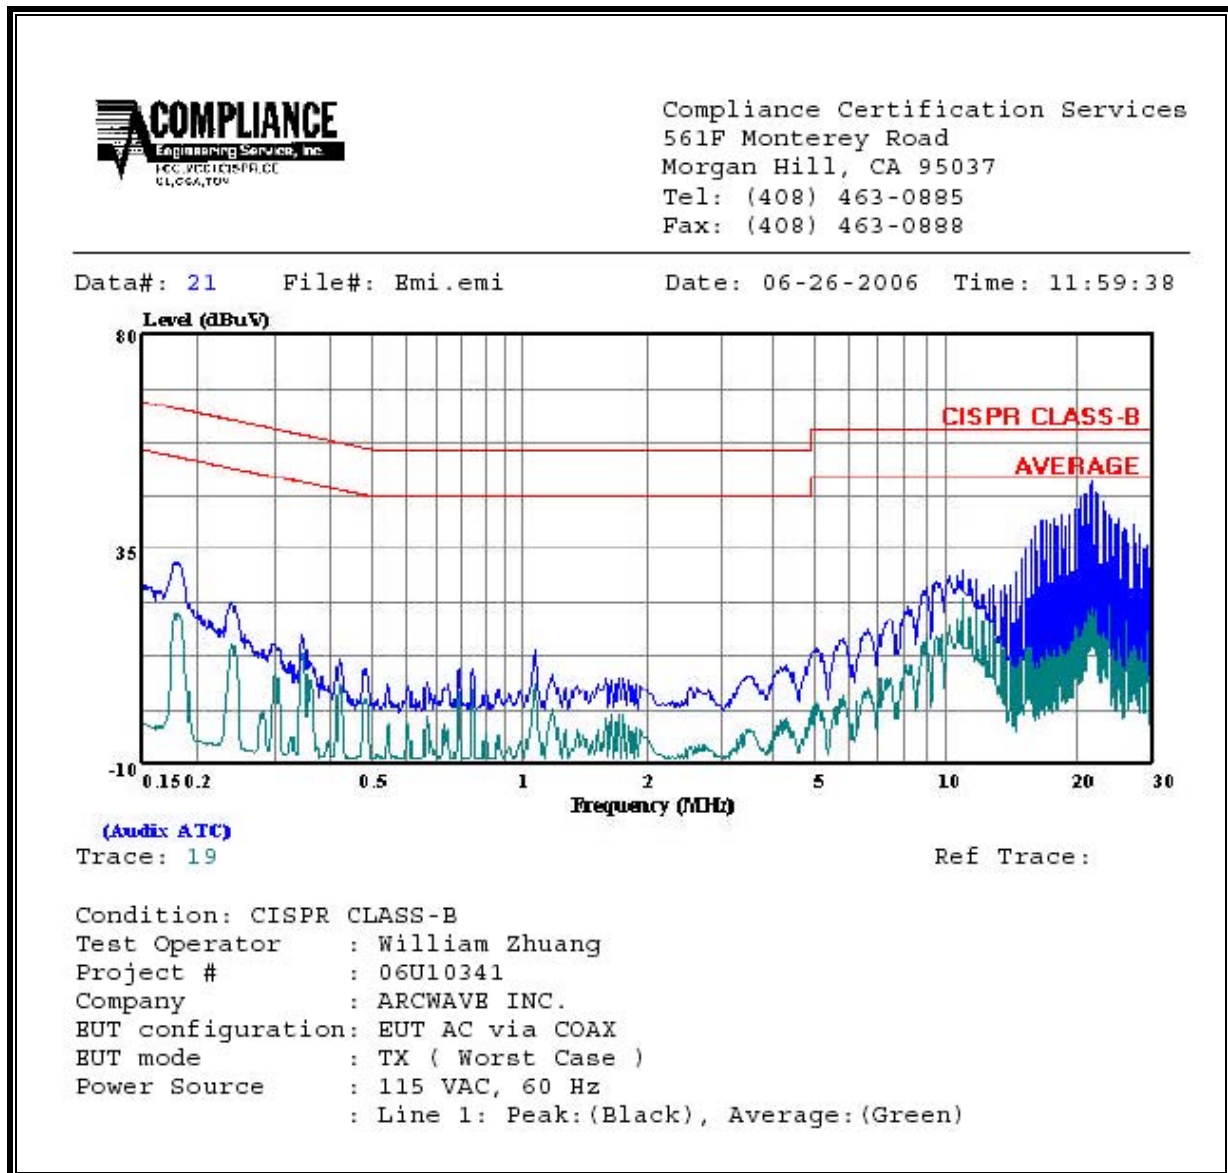

LINE 2 RESULTS, EUT with AC via Coax

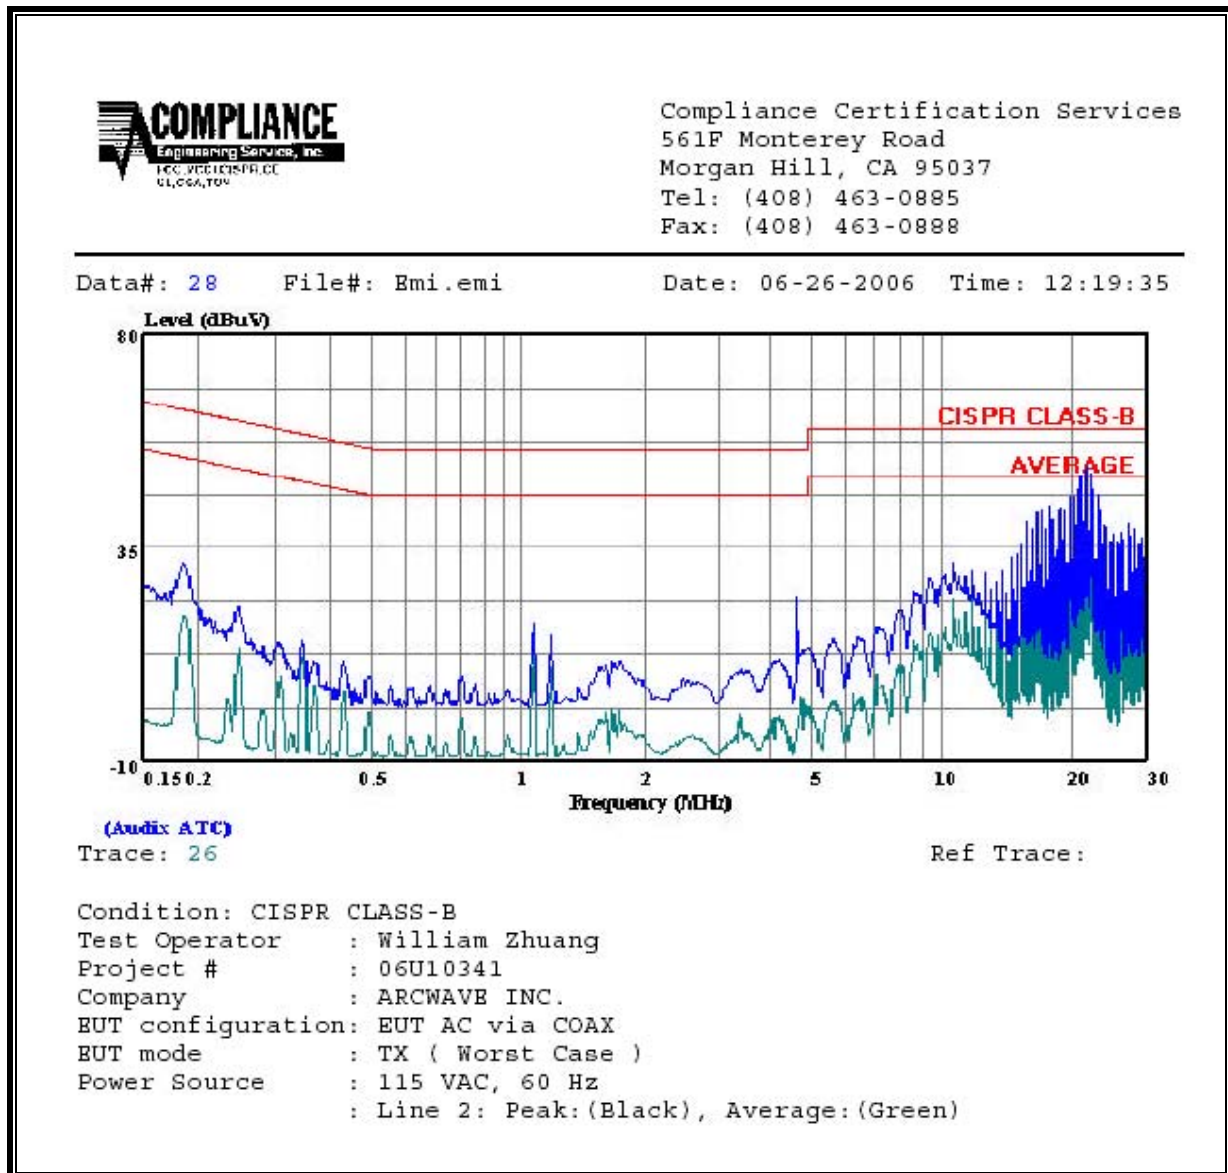


6 WORST EMISSIONS


EUT with POE Switching Power

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq.	Reading			Closs	Limit	EN_B	Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.16	58.68	--	45.80	0.00	65.73	55.73	-7.05	-9.93	L1
0.38	54.94	--	37.04	0.00	58.26	48.26	-3.32	-11.22	L1
6.49	48.82	--	36.18	0.00	60.00	50.00	-11.18	-13.82	L1
0.15	63.74	--	44.08	0.00	65.94	55.94	-2.20	-11.86	L2
0.47	49.84	--	34.83	0.00	56.53	46.53	-6.69	-11.70	L2
6.66	51.44	--	38.63	0.00	60.00	50.00	-8.56	-11.37	L2
6 Worst Data									

LINE 1 RESULTS, EUT with POE Switching Power

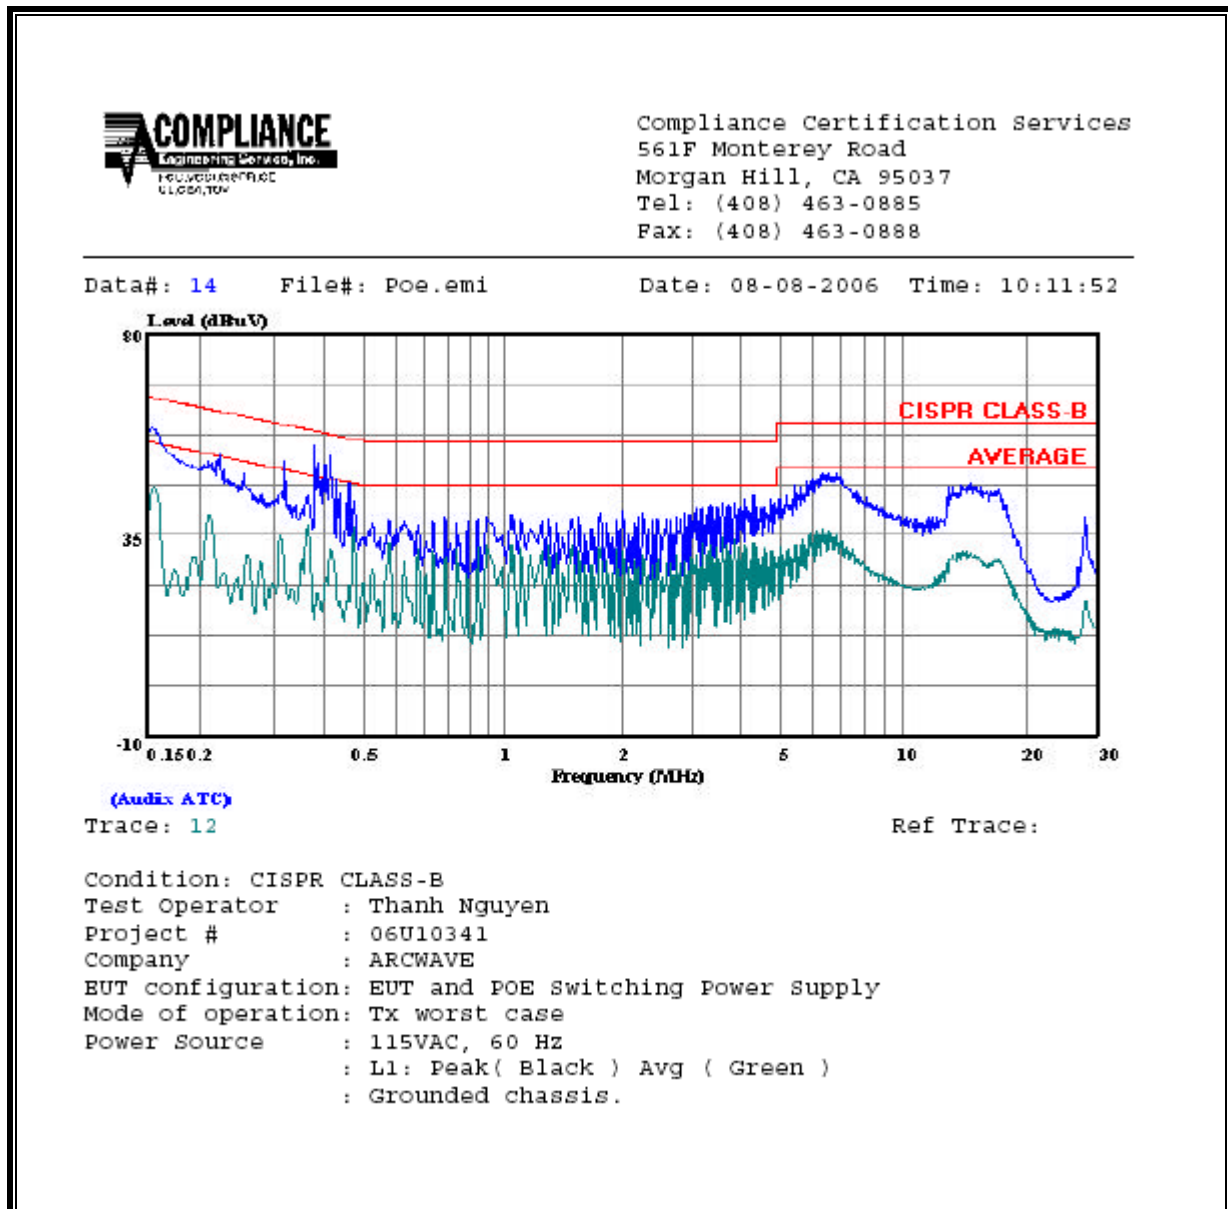


LINE 2 RESULTS, EUT with POE Switching Power

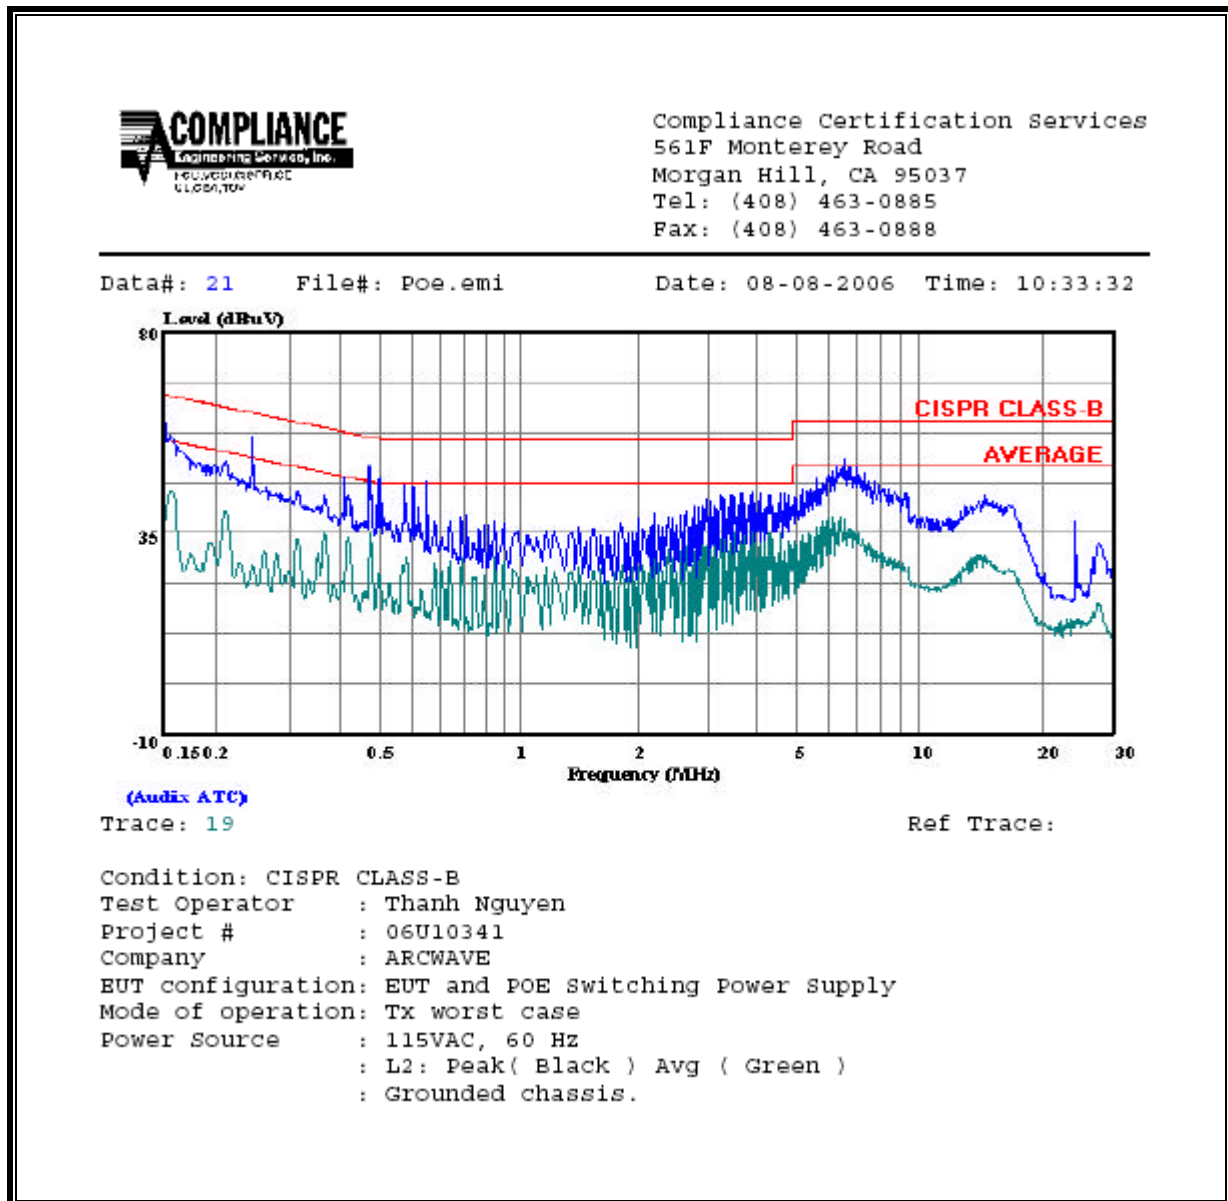


8. SETUP PHOTOS

ANTENNA PORT CONDUCTED RF MEASUREMENT SETUP

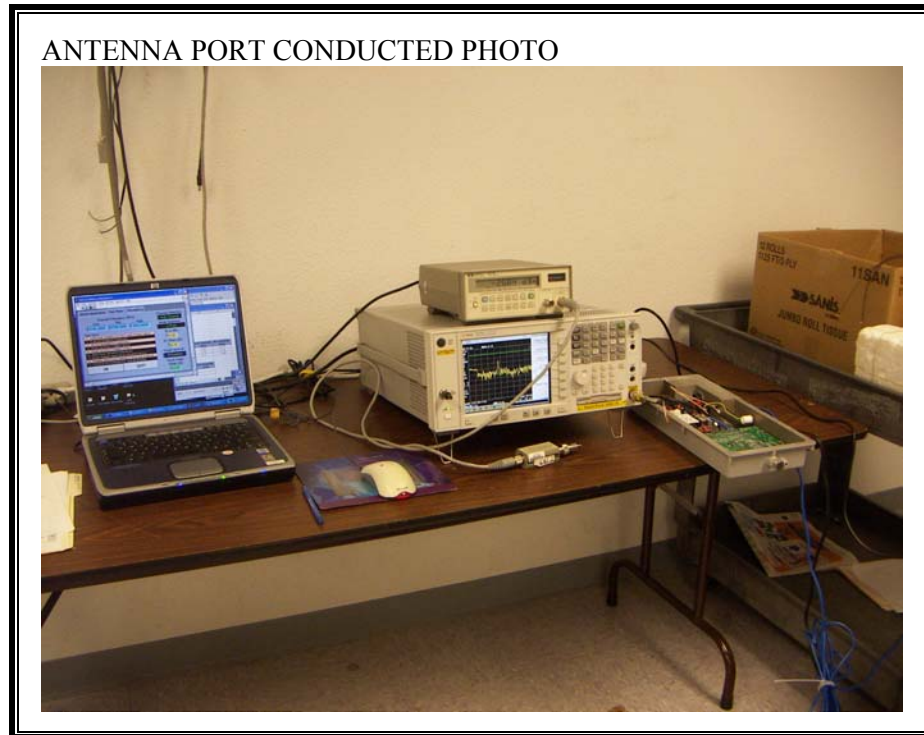


RADIATED RF MEASUREMENT SETUP

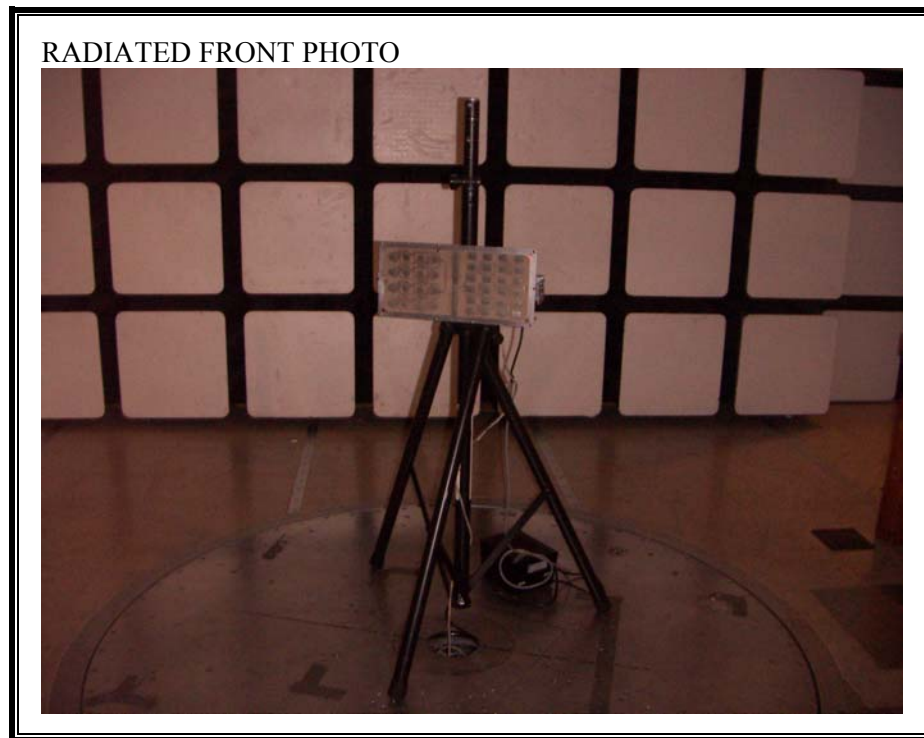

RADIATED BACK PHOTO



POWERLINE CONDUCTED EMISSIONS MEASUREMENT SETUP – EUT with AV via Coax

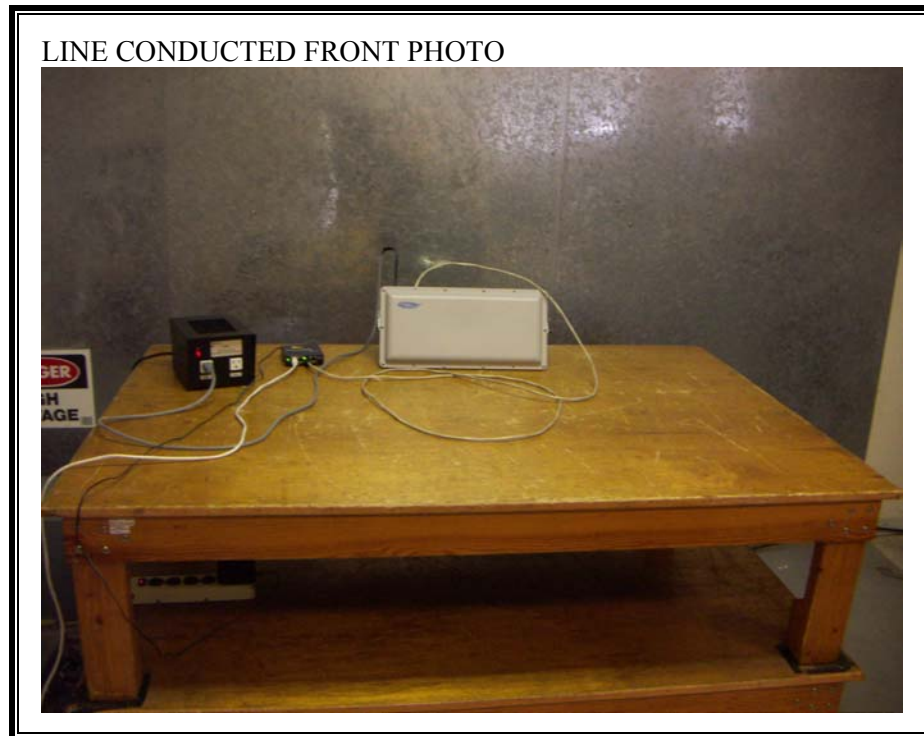

LINE CONDUCTED BACK PHOTO



POWERLINE CONDUCTED EMISSIONS MEASUREMENT SETUP – EUT with POE



LINE CONDUCTED BACK PHOTO



END OF REPORT