



Electromagnetic Compatibility Test Report

Tests Performed on a DCSI

Wireless Meter Reading System, Model Y72553-1

Radiometrics Document RP-6015



Product Detail:

IC: 7100A-Y725531

FCC ID: PN3Y72553-1

Equipment type: 902.6 to 927.8 MHz Transceiver for Meter Reading.

Test Standards:

US CFR Title 47, Chapter I, FCC Part 15 Subpart C

FCC Part 15 CFR Title 47: 2002

Industry Canada RSS-210, Issue 7 as required for Category I Equipment

This report concerns: Original Grant

FCC Part 15.249

RSS-210 A2.9

Tests Performed For:

DCSI

945 Hornet Dr.

Hazelwood, MO 63042

Phone: (314) 895-6505

Test Facility:

Radiometrics Midwest Corporation

12 East Devonwood

Romeoville, IL 60446

Phone: (815) 293-0772

e-mail: info@radiomet.com

Test Date(s): (Month-Day-Year)

May 9 to August 7, 2007

Document RP-6015 Revisions:

Rev.	Issue Date	Affected Pages	Revised By
0	August 8, 2007		
1	August 9, 2007	All	Joseph Strzelecki
2	August 14, 2007	1, 5	Joseph Strzelecki

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report		
<i>Equipment Tested (Company, Model, Product Name):</i> DCSI, Y72553-1, UHF Ttransmitter	<i>Document No.:</i> RP-6015 Rev. 2	<i>Page:</i> 2 of 28



Table of Contents

1 ADMINISTRATIVE DATA	3
2 TEST SUMMARY AND RESULTS	3
2.1 RF Exposure Compliance Requirements	3
3 EQUIPMENT UNDER TEST (EUT) DETAILS	3
3.1 EUT Description	3
4 TESTED SYSTEM DETAILS	4
4.1 Tested System Configuration	4
4.2 Special Accessories	4
4.3 Equipment Modifications	4
5 TEST SPECIFICATIONS AND RELATED DOCUMENTS.....	5
6 RADIOMETRICS' TEST FACILITIES	5
7 DEVIATIONS AND EXCLUSIONS FROM THE TEST SPECIFICATIONS.....	6
8 CERTIFICATION	6
9 TEST EQUIPMENT TABLE	6
10 TEST SECTIONS	7
10.1 AC Conducted Emissions; Section 15.207.....	7
Figure 1. Conducted Emissions Test Setup.....	9
10.2 Radiated Emissions.....	9
10.2.1 Radiated Emissions Field Strength Sample Calculation.....	10
Figure 2. Drawing of Radiated Emissions Setup	11
10.2.2 Spurious Radiated Emissions Test Results	12

Notice: This report must not be reproduced (except in full) without the written approval of Radiometrics Midwest Corporation.

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report		
<i>Equipment Tested (Company, Model, Product Name):</i> DCSI, Y72553-1, UHF Ttransmitter	<i>Document No.:</i> RP-6015 Rev. 2	<i>Page:</i> 3 of 28

1 ADMINISTRATIVE DATA

<i>Equipment Under Test:</i> A DCSI, Wireless Meter Reading System Model: Y72553-1 The EMTR has a Serial Number: 8502300 This will be referred to as the EUT in this Report	
<i>Date EUT Received at Radiometrics: (Month-Day-Year)</i> May 9, 2007	<i>Test Date(s): (Month-Day-Year)</i> August 7, 2007
<i>Test Report Written By:</i> Joseph Strzelecki Senior EMC Engineer	<i>Test Witnessed By:</i> Not witnessed by personnel from DCSI
<i>Radiometrics' Personnel Responsible for Test:</i> 	<i>Test Report Approved By</i> 
Joseph Strzelecki Senior EMC Engineer NARTE EMC-000877-NE	Chris W. Carlson Director of Engineering NARTE EMC-000921-NE

2 TEST SUMMARY AND RESULTS

The EUT (Equipment Under Test) is a Wireless Meter Reading System, Model Y72553-1, manufactured by DCSI. The detailed test results are presented in a separate section. The following is a summary of the test results. This report is for a system of three transceivers.

Environmental Phenomena	Frequency Range	FCC Section	RSS-210 Section	Test Result
Radiated Emissions (Spurious & Fundamental)	30-9300 MHz	15.249	Annex 7	Pass
AC Conducted Emissions	0.15-30 MHz	15.249	6.6	Pass

2.1 RF Exposure Compliance Requirements

Since the power output is less than 1 mW, the EUT meets the FCC requirement for RF exposure and it is exempt from RSS-102. There are no power level adjustments and the antenna is permanently attached as a PCB trace.

3 EQUIPMENT UNDER TEST (EUT) DETAILS

3.1 EUT Description

The EUT is a Wireless Meter Reading System, Model Y72553-1, manufactured by DCSI. The EUT was in good working condition during the tests, with no known defects.

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report		
<i>Equipment Tested (Company, Model, Product Name):</i> DCSI, Y72553-1, UHF Ttransmitter	<i>Document No.:</i> RP-6015 Rev. 2	<i>Page:</i> 4 of 28

The Antenna has a gain of less than 2 dBi.

4 TESTED SYSTEM DETAILS

4.1 Tested System Configuration

The system was configured for testing in a typical fashion. The EUT was placed on an 80-cm high, nonconductive test stand. The testing was performed in conditions as close as possible to installed conditions. Wiring was consistent with manufacturer's recommendations.

The identification for all equipment, plus descriptions of all cables used in the tested system, are:

Tested System Configuration List

Item	Description	Type*	Manufacturer	Model Number	Assem #	Serial Number
1	Wireless Meter Reading System	E	DCSI	Y72553-1	Y72650	8502300

* Type: E = EUT, P = Peripheral,

The EMTR was tested in an Itron Meter, S/N 38 764 286 with a DCSI S/N 8502300.

List of System Cables

QTY	Length (m)	Cable Description	Connected to (Item #)	Shielded?
1	1.0	3 wire AC input Cable for EMTR	#1	No
1	1.0	2-wire AC Output Unterminated Cable	#1	No

The EMTR is installed in an electricity meter. The meter connects to a standard mount for households and businesses. Since the EMTR is wall mounted, it was placed in an upright configuration during the tests. Line and load cables were connected to the EUT as in a typical installation. Power was supplied at 240 VAC, 60 Hz single-phase.

4.2 Special Accessories

No special accessories were used during the tests in order to achieve compliance.

4.3 Equipment Modifications

No modifications were made to the EUT at Radiometrics' test facility in order to comply with the standards listed in this report.

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report		
<i>Equipment Tested (Company, Model, Product Name):</i> DCSI, Y72553-1, UHF Ttransmitter	<i>Document No.:</i> RP-6015 Rev. 2	<i>Page:</i> 5 of 28

5 TEST SPECIFICATIONS AND RELATED DOCUMENTS

Document	Date	Title
FCC CFR Title 47	2005	Code of Federal Regulations Title 47, Chapter 1, Federal Communications Commission, Part 15 - Radio Frequency Devices
ANSI C63.4-2003	2003	Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
IC RSS-Gen Issue 2	2007	General Requirements and Information for the Certification of Radiocommunication Equipment (RSS-Gen)
IC RSS-210 Issue 7	2007	Low Power Licence-Exempt Radiocommunication Devices (All Frequency Bands)

The test procedures used are in accordance with the FCC DA 00-75, Industry Canada RSS-212 and ANSI document C63.4-2003, "Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz". The specific procedures are described herein. Radiated testing was performed at an antenna to EUT distance of 3 meters. The antenna was raised and lowered from 1 to 4 meters.

6 RADIOMETRICS' TEST FACILITIES

The results of these tests were obtained at Radiometrics Midwest Corp. in Romeoville, Illinois, USA. Radiometrics has been accredited by A2LA (American Association for Laboratory Accreditation) to conform to ISO/IEC 17025: 1999 "General Requirements for the Competence of Calibration and Testing Laboratories". Radiometrics' Lab Code is 121191 and Certification Number is 1495.01. Radiometrics' scope of accreditation includes all of the "basic standards" listed herein. A copy of the accreditation can be accessed on our web site (www.radiomet.com). Radiometrics' accreditation status can be verified at A2LA's web site (www.a2la.org).

The following is a list of shielded enclosures located in Romeoville, Illinois:

Chamber A: Is an anechoic chamber that measures 24' L X 12' W X 12' H. The walls and ceiling are fully lined with ferrite absorber tiles. The floor has a 10' x 10' section of ferrite absorber tiles in the located in the center. Panashield of Rowayton, Connecticut manufactured the chamber. The enclosure is NAMAS certified.

Chamber B: Is a shielded enclosure that measures 24' L X 12' W X 8' H. Erik A. Lindgren & Associates of Chicago, Illinois manufactured the enclosure.

Chamber C: Is a shielded enclosure that measures 20' L X 10' W X 8' H. Lindgren RF Enclosures Inc. of Addison, Illinois manufactured the enclosure.

Chamber D: Is a fully anechoic chamber that measures 22' L X 10' W X 10' H. The walls, ceiling and floor are fully lined with ferrite absorber tiles. Braden Shielding Systems of Tulsa, Oklahoma manufactured the chamber.

Chamber E: Is a custom made anechoic chamber that measures 52' L X 30' W X 18' H. The walls and ceiling are fully lined with RF absorber. Pro-shield of Collinsville, Oklahoma manufactured the chamber.

A separate ten-foot long, brass plated, steel ground rod attached via a 6 inch copper braid grounds each of the above chambers. Each enclosure is also equipped with low-pass power line filters.

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report		
<i>Equipment Tested (Company, Model, Product Name):</i> DCSI, Y72553-1, UHF Ttransmitter	<i>Document No.:</i> RP-6015 Rev. 2	<i>Page:</i> 6 of 28

Open Area Test Site (OATS): Is located on 8625 Helmar Road in Newark, Illinois, USA and measures 56' L X 24' W X 17' H. The entire open field test site has a metal ground screen. The FCC has accepted these sites as test site number 31040/SIT 1300F2. The FCC test site Registration Number is 90897. Details of the site characteristics are on file with the Industry Canada as file number IC3124.

A complete list of the test equipment is provided herein. The calibration due dates are indicated on the equipment list. The equipment is calibrated in accordance to ANSI/NCSL Z540-1 with traceability to the National Institute of Standards and Technology (NIST).

7 DEVIATIONS AND EXCLUSIONS FROM THE TEST SPECIFICATIONS

There were no deviations or exclusions from the test specifications.

8 CERTIFICATION

Radiometrics Midwest Corporation certifies that the data contained herein was taken under conditions that meet or exceed the requirements of the test specification. The results relate only to the EUT listed herein. Any modifications made to the EUT subsequent to the indicated test date will invalidate the data and void this certification.

9 TEST EQUIPMENT TABLE

RMC ID	Manufacturer	Description	Model No.	Serial No.	Frequency Range	Cal Period	Cal Date
AMP-05	RMC/Celeritek	Pre-amplifier	MW110G	1001	1.0-12GHz	12 Mo.	12/27/06
AMP-16	MITEQ	Pre-amplifier	AM-1300	608852	0.01-1000MHz	12 Mo.	12/27/06
AMP-22	Anritsu	Pre-amplifier	MH648A	M23969	0.1-1200MHz	12 Mo.	12/29/06
ANT-13	EMCO	Horn Antenna	3115	2502	1.0-18GHz	24 Mo.	10/24/06
ANT-44	Imp Machine	Super Log Antenna	SL-20M2G	1002	20-2000MHz	24 Mo.	12/12/05
LSN-01	Electrometrics	50 uH LISN	FCC/VDE 50/2	1001	0.01-30MHz	24 Mo.	05/03/07
REC-07	Anritsu	Spectrum Analyzer	MS2601A	MT53067	0.01-2200MHz	12 Mo.	1/17/07
REC-08	Hewlett Packard	Spectrum Analyzer	8566B	2648A13481 2209A01436	30Hz-22GHz	12 Mo.	07/05/06
THM-01	Extech Inst.	Temp/Humid Meter	4465CF	001106557	N/A	24 Mo.	03/31/06

Note: All calibrated equipment is subject to periodic checks.

NCR – No Calibration Required. Device monitored by calibrated equipment. N/A: Not Applicable.

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report		
<i>Equipment Tested (Company, Model, Product Name):</i> DCSI, Y72553-1, UHF Ttransmitter	<i>Document No.:</i> RP-6015 Rev. 2	<i>Page:</i> 7 of 28

10 TEST SECTIONS

10.1 AC Conducted Emissions; Section 15.207

A computer-controlled analyzer was used to perform the conducted emissions measurements. The frequency range was divided into 500 subranges equally spaced on a logarithmic scale. The computer recorded the peak of each subrange. This data was then plotted on semi-log graph paper generated by the computer and plotter. Adjusting the positions of the cables and orientation of the test system then maximizes the highest emissions.

Mains Conducted emission measurements were performed using a 50 Ohm/50 uH Line Impedance Stabilization Network (LISN) as the pick-up device. Measurements were repeated on both leads within the power cord. If the EUT power cord exceeded 80 cm in length, the excess length of the power cord was made into a 30 to 40 cm bundle near the center of the cord. The LISN was placed on the floor at the base of the test platform and electrically bonded to the ground plane.

Broadband conducted emissions may exceed the following limits by no more than 13 dB. An emission is defined as broadband if the average detector amplitude is 6 dB or more under the quasi-peak detector amplitude.

FCC Limits of Conducted Emissions at the AC Mains Ports

Frequency Range (MHz)	Class B Limits (dBuV)	
	Quasi-Peak	Average
0.150 - 0.50*	66 - 56	56 - 46
0.5 - 5.0	56	46
5.0 - 30	60	50

* The limit decreases linearly with the logarithm of the frequency in this range.

The initial step in collecting conducted data is a peak detector scan and the plotting of the measurement range. Significant peaks are then marked as shown on the following table, and these signals are then measured with the quasi-peak detector. The following represents the worst case emissions from power cord, after testing all modes of operation.

The Data in red is with the peak detector function. The dashed line in blue is the QP level and the "X" is the Average level.

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report		
<i>Equipment Tested (Company, Model, Product Name):</i> DCSI, Y72553-1, UHF Ttransmitter	<i>Document No.:</i> RP-6015 Rev. 2	<i>Page:</i> 8 of 28


Test Date : August 7, 2007

The Amplitude is the final corrected value with cable and LISN Loss.

Freq	Lead Tested	Frequency MHz	QP Amplitude	QP Limit	Average Amplitude	Average Limit
Ch 1	AC Neutral	0.15	45.60	65.95	25.47	55.95
Ch 1	AC Neutral	0.67	25.88	56.00	20.40	46.00
Ch 1	AC Neutral	16.07	32.35	60.00	30.24	50.00
Ch 1	AC Neutral	24.10	31.04	60.00	27.88	50.00
Ch 39	AC Neutral	0.15	45.57	65.95	25.47	55.95
Ch 39	AC Neutral	16.07	32.33	60.00	30.24	50.00
Ch 39	AC Neutral	24.10	31.03	60.00	27.88	50.00
Ch 79	AC Neutral	0.15	45.50	65.94	25.47	55.94
Ch 79	AC Neutral	0.67	25.92	56.00	20.40	46.00
Ch 79	AC Neutral	8.03	27.53	60.00	24.44	50.00
Ch 79	AC Neutral	16.07	32.29	60.00	30.24	50.00
Ch 79	AC Neutral	24.10	30.90	60.00	27.88	50.00
Ch 1	AC Hot	0.15	44.44	65.96	25.22	55.96
Ch 1	AC Hot	8.04	29.91	60.00	27.85	50.00
Ch 1	AC Hot	16.07	31.39	60.00	28.74	50.00
Ch 1	AC Hot	24.10	31.24	60.00	28.47	50.00
Ch 1	AC Hot	26.22	32.59	60.00	29.92	50.00
Ch 39	AC Hot	0.15	44.50	65.98	25.22	55.98
Ch 39	AC Hot	8.03	29.91	60.00	27.09	50.00
Ch 39	AC Hot	16.07	31.28	60.00	28.74	50.00
Ch 39	AC Hot	24.10	31.19	60.00	28.47	50.00
Ch 39	AC Hot	26.22	32.49	60.00	29.92	50.00
Ch 79	AC Hot	0.15	44.32	66.00	25.22	56.00
Ch 79	AC Hot	8.03	30.01	60.00	27.09	50.00
Ch 79	AC Hot	16.07	31.35	60.00	28.74	50.00
Ch 79	AC Hot	22.09	28.78	60.00	24.58	50.00
Ch 79	AC Hot	24.10	31.21	60.00	28.47	50.00
Ch 79	AC Hot	26.22	32.53	60.00	29.92	50.00

Judgment: Passed by 19.8 dB

Figure 1. Conducted Emissions Test Setup

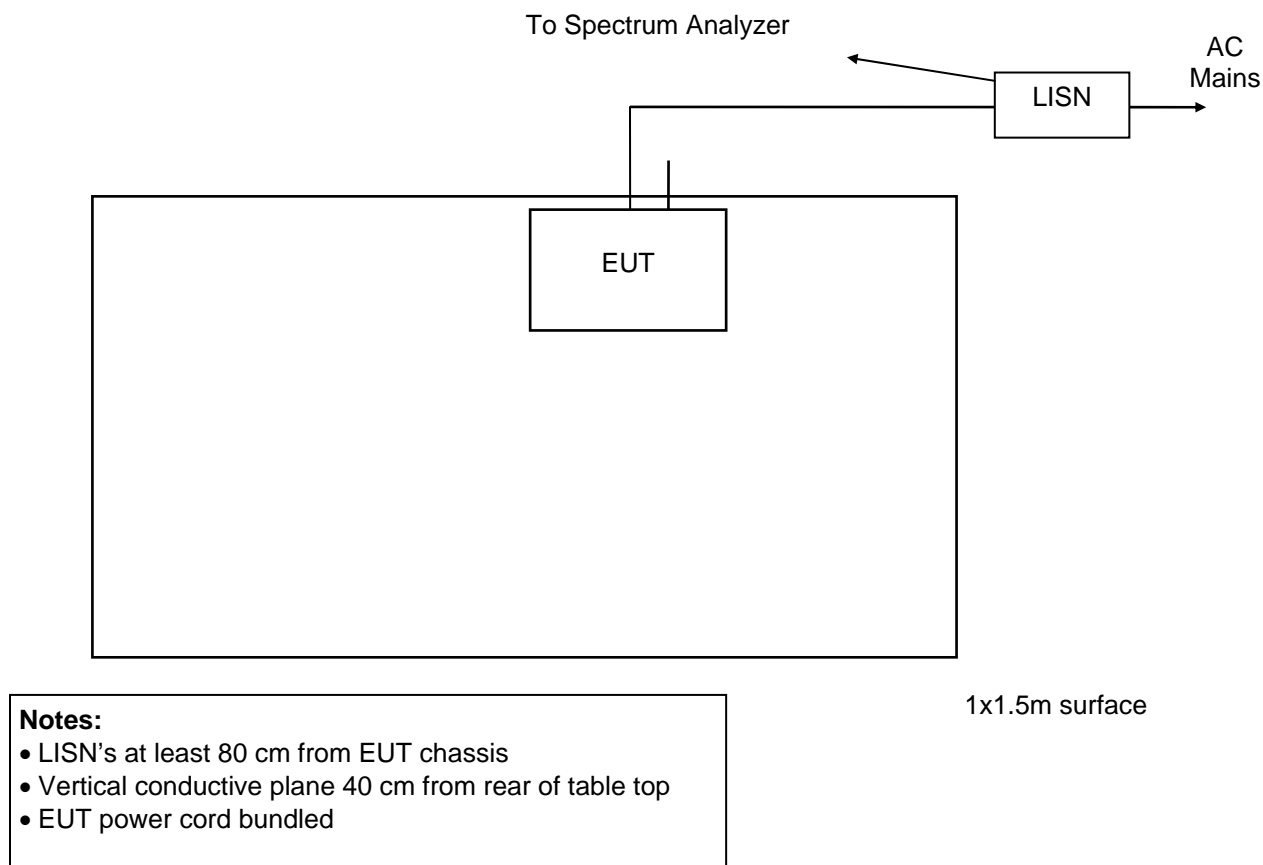

10.2 Radiated Emissions

Radiated emission measurements were performed with linearly polarized broadband antennas. The results obtained with these antennas can be correlated with results obtained with a tuned dipole antenna. Below 1 GHz, when a radiated emission is detected approaching the specification limit, the measurement of the emission is repeated using a tuned dipole antenna with a Roberts Balun. A 10 dB linearity check is performed prior to start of testing in order to determine if an overload condition exists.

From 30 to 1000 MHz, an Anritsu Spectrum analyzer and a MITEQ AM-1431 amplifier with a 10 dB attenuator connected to the input were used. The out of band emissions and the ambient emissions were below the level of input overload (80 dBuV).

For tests from 1 to 9.3 GHz, an HP8566A spectrum analyzer was used with a Celeritek uWave amplifier. The out of band emissions and the ambient emissions were below the level of input overload (72 dBuV).

Radiated emission measurements are performed with linearly polarized broadband antennas. Measurements were performed using two antenna polarizations, (vertical and horizontal). The worst case emissions were recorded.

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report		
<i>Equipment Tested (Company, Model, Product Name):</i> DCSI, Y72553-1, UHF Ttransmitter	<i>Document No.:</i> RP-6015 Rev. 2	<i>Page:</i> 10 of 28

Final radiated emissions measurements were performed in the open area test site at a test distance of 3 meters. The entire frequency range from 30 to 9300 MHz was slowly scanned and the emissions in the restricted frequency bands were recorded. Measurements were performed using the peak detector function. The detected emission levels were maximized by rotating the EUT, adjusting the positions of all cables, and by scanning the measurement antenna from 1 to 4 meters above the ground. The open area test site used to collect the radiated data is located on 8625 Helmar Road in Newark, Illinois. The open field test site has a metal ground screen. All other tests are performed at 12 East Devonwood Ave. Romeoville, Illinois EMI test lab.

10.2.1 Radiated Emissions Field Strength Sample Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and by subtracting the Amplifier Gain from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG$$

Where: FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor


AG = Amplifier Gain

Assume a receiver reading of 49.5 dBuV is obtained. The Antenna Factor of 8.1 and a Cable Factor of 1.7 is added. The Amplifier Gain of 23.3 dB is subtracted, giving a field strength of 36 dBuV/m. The 36 dBuV/m can be mathematically converted to its corresponding level in uV/m.


$$FS = 49.5 + 8.1 + 1.7 - 23.3 = 36.0 \text{ dBuV/m}$$

$$\text{Level in uV/m} = \text{Common Antilogarithm } [(36 \text{ dBuV/m})/20] = 63.1 \text{ uV/m}$$

Figure 2. Drawing of Radiated Emissions Setup

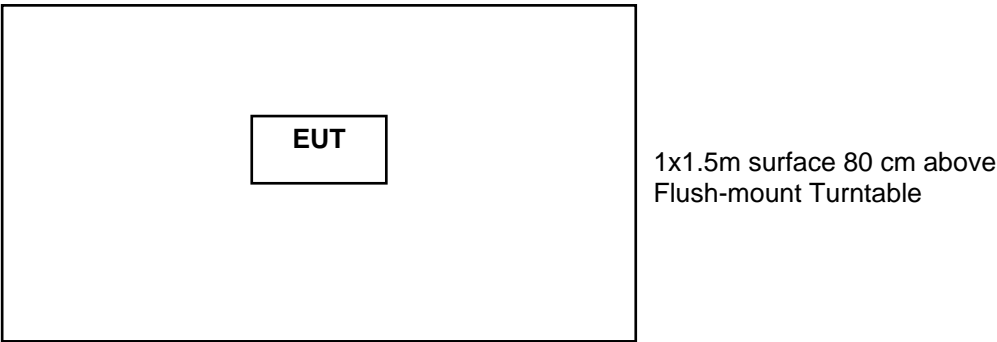

- Notes:**
- AC outlet with low-pass filter at the base of the turntable
 - Antenna height varied from 1 to 4 meters
 - Distance from antenna to tested system is 3 meters
 - Not to Scale

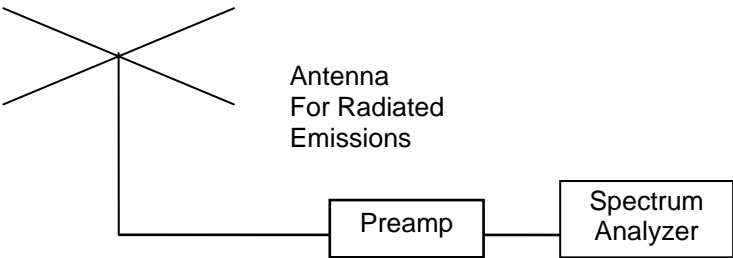

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report		
<i>Equipment Tested (Company, Model, Product Name):</i> DCSI, Y72553-1, UHF Ttransmitter	<i>Document No.:</i> RP-6015 Rev. 2	<i>Page:</i> 12 of 28

10.2.2 Transmitter Radiated Emissions Test Results

The following spectrum analyzer settings were used:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 120 kHz for $f < 1$ GHz

VBW = 1 kHz for Average Measurements

VBW = 1 MHz for Peak Measurements

Sweep = auto

Manufacturer	DCSI	Specification	FCC Part 15 Subpart C & RSS-210
Model	Y72553-1	Test Date	August 7, 2007
Serial Number	8502300	Test Distance	3 Meters
Abbreviations	Pol = Antenna Polarization; Vert = Vertical; Horz = Horizontal; QP = Quasi-Peak		
Antennas used	30 to 200 MHz Biconical (ANT-42); 200 to 1000 MHz Log-Periodic (ANT-6) 1 to 18 GHz Double Ridged Guide Horn (ANT-13)		
Notes	The Amplitude is the final corrected value with cable and the preamp gain subtracted.		

Tx Freq	Ant Pol.	Detector Function	Emission Freq. MHz	EUT Field Strength (dBuV/m)	Limit (dBuV/m)	Margin Under limit (dB)
902.6	Horz	Peak	902.7	86.3	94	7.7
902.6	Horz	Peak	1805.2	42.2	54	11.8
902.6	Horz	Peak	2708.1	40.3	54	13.7
902.6	Vert	Peak	902.7	90.3	94	3.7
902.6	Vert	Peak	904	45.6	94	48.4
902.6	Vert	Peak	1805.2	45.0	54	9.0
902.6	Vert	Peak	2708.1	42.1	54	11.9
914.9	Horz	Peak	250.8	20.5	46	25.5
914.9	Horz	Peak	348.4	25.4	46	20.6
914.9	Horz	Peak	760.0	31.7	46	14.3
914.9	Horz	Peak	915.0	84.2	94	9.8
914.9	Horz	Peak	1829.8	44.6	54	9.4
914.9	Horz	Peak	2744.7	42.8	54	11.2
914.9	Vert	Peak	73.2	17.9	40	22.1
914.9	Vert	Peak	102.8	20.5	43.5	23
914.9	Vert	Peak	661.6	29.0	46	17
914.9	Vert	Peak	860.8	37.2	46	8.8
914.9	Vert	Peak	915.0	88.3	94	5.7
914.9	Vert	Peak	1830.3	41.3	54	12.7
914.9	Vert	Peak	2744.7	42.8	54	11.2
927.8	Horz	Peak	927.9	83.5	94	10.5
927.8	Horz	Peak	1855.7	41.1	54	12.9
927.8	Horz	Peak	2783.4	42.9	54	11.1
927.8	Vert	Peak	926.8	39.9	94	54.1
927.8	Vert	QP	927.8	84.9	94	9.1
927.8	Vert	Peak	1855.6	40.8	54	13.2
927.8	Vert	Peak	2783.4	40.7	54	13.3
902.6	Vert	Peak	902	38.8	46	7.2
902.6	Horz	Peak	902	34.8	46	11.2
927.8	Vert	Peak	928	44.9	46	1.1
927.8	Horz	Peak	928	43.5	46	2.5

No other emissions detected within 10 dB of the limits.

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report		
<i>Equipment Tested (Company, Model, Product Name):</i> DCSI, Y72553-1, UHF Ttransmitter	<i>Document No.:</i> RP-6015 Rev. 2	<i>Page:</i> 13 of 28

The band edge measurements are at 902 and 928 MHz

For frequencies above 1 GHz, the Peak levels are under the Average and peak limits, therefore the average measurements were not performed.

10.2.3 Receiver Radiated Emissions Test Results

The following spectrum analyzer settings were used:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 120 kHz for $f < 1$ GHz

VBW = 1 kHz for Average Measurements

VBW = 1 MHz for Peak Measurements

Sweep = auto

Rx Freq	Ant Pol.	Detector Function	Emission Freq. MHz	EUT Field Strength (dBuV/m)	Limit (dBuV/m)	Margin Under limit (dB)
902.6	V/44	Peak	152.8	20.8	43.5	22.7
902.6	V/44	Peak	183.0	21.1	43.5	22.4
902.6	V/44	Peak	190.9	23.8	43.5	19.7
902.6	V/44	Peak	196.6	23.5	43.5	20.0
902.6	V/44	Peak	214.9	23.9	43.5	19.6
902.6	V/44	Peak	230.7	23.1	46.0	22.9
902.6	V/44	Peak	536.2	27.2	46.0	18.8
902.6	V/44	Peak	509.6	27.5	46.0	18.5
902.6	V/44	Peak	196.3	22.3	43.5	21.2
902.6	V/44	Peak	222.1	21.3	46.0	24.7
914.9	V/44	Peak	232.3	21.6	46.0	24.4
914.9	V/44	Peak	190.5	23.3	43.5	20.2
914.9	V/44	Peak	152.6	21.5	43.5	22.0
914.9	V/44	Peak	183.0	22.7	43.5	20.8
914.9	V/44	Peak	190.9	23.9	43.5	19.6
914.9	V/44	Peak	196.5	24.1	43.5	19.4
914.9	V/44	Peak	214.8	24.1	43.5	19.4
914.9	V/44	Peak	230.7	24.5	46.0	21.5
914.9	V/44	Peak	536.0	27.5	46.0	18.5
927.8	V/44	Peak	183.0	19.6	43.5	23.9
927.8	V/44	Peak	190.8	22.2	43.5	21.3
927.8	V/44	Peak	196.5	22.9	43.5	20.6
927.8	V/44	Peak	214.8	23.7	43.5	19.8
927.8	V/44	Peak	230.6	22.6	46.0	23.4
927.8	V/44	Peak	536.1	26.2	46.0	19.8
927.8	V/44	Peak	509.6	26.9	46.0	19.1
927.8	V/44	Peak	196.2	21.8	43.5	21.7
927.8	V/44	Peak	222.8	26.7	46.0	19.3
902.7	H/44	Peak	530.0	27.1	46.0	18.9
902.7	H/44	Peak	250.4	19.2	46.0	26.8
914.9	H/44	Peak	530.0	27.6	46.0	18.4
927.8	H/44	Peak	530.2	28.1	46.0	17.9
927.8	H/44	Peak	250.7	21.3	46.0	24.7

RADIOMETRICS MIDWEST CORPORATION - EMC Test Report		
<i>Equipment Tested (Company, Model, Product Name):</i> DCSI, Y72553-1, UHF Ttransmitter	<i>Document No.:</i> RP-6015 Rev. 2	<i>Page:</i> 14 of 28

10.3 20 dB Occupied Bandwidth

The occupied bandwidth of the RF output was measured using a spectrum analyzer. The bandwidth was measured using the peak detector function and a narrow resolution bandwidth as listed in the table below. The 20 dB Bandwidth was measured using the delta marker function.

Channel	10 kHz RBW ; 30 kHz VBW	30 kHz RBW ; 100kHz VBW
	BW in kHz	BW in kHz
1	168	259
39	173	260
79	162	256