# FCC PART 15, SUBPART C TEST METHOD: ANSI C63.4-1992 TEST REPORT

for

Wireless Tire Pressure Sensor Model PNZ1101T

> OEM Manufacture: Xilor Inc 1400 Liberty St. Knoxville, TN 37909 (865) 546-9863

DATE: 3-15-2002

<b>Table of Contents:</b>	Page
Purpose and Report Summary	3
Test Equipment settings and measurements Device flat measurements Device end measurements Device side measurements Device correction factors Scope capture of pulse widths Occupied bandwidth plot	4 5 6 7 8 9
Test Equipment/Antenna/Calibration List	10

#### **REPORT SUMMARY**

This is an electromagnetic emission test report. The test report is based on testing performed by Philips Testing Lab. The tests were performed in order to determine whether the electromagnetic emissions from the equipment under test are within the specification limits defined by CFR Title 47, Part 15, Subpart C, sections 15.205, 15.209, and 15.231(e).

Test Lab:	Philips Testing 3029 Gov. John Sevier Hwy. Knoxville TN 37914
	FCC Reg.# 90875 (exp. 1/28/03)
	NVLAP# 200409-0 exp. (6/30/02)
	(DBA Philips Consumer Electronics)
Device(s) Tested:	Wireless Tire Pressure Sensor
Model or P/N(s):	Model PNZ1101T
Modifications:	The EUT was not modified during the testing.
Manufacturer:	Xilor Inc 1400 Liberty St. Knoxville TN 37909
Test Date:	3-04-2002
Test	EMI requirements
Specifications:	CFR Title 47, Part 15 Subpart C, Sections 15.205, 15.209, and 15.231
Test Procedure:	ANSI C63.4: 1992
Test Deviation:	The test procedure was not deviated from during testing.

SUMMARY OF TEST RESULTS					
Conducted RF Emissions	This test was not performed because the EUT runs off 3-volt lithium coin cells only and cannot be powered by any device that runs off of the AC public mains.				
Radiated RF Emissions	Complies with the limits of CFR Title 47, Part 15, Subpart C, sections 15.205, 15.209, and 15.231 (e)				
END OF SUMMARY					

	Radiated Emissions FCC Section 15.205 and 15.231 (e)							
Report	# 20511 Test Distance 3 meters							
Date	3/04/2002	Test Conditions	Unit FLAT					
EUT	Wireless Tire Pressure Sensor/Transmitter							
Model	PNZ1101T							
Mfg.	Xilor							
FCC ID	PNZ1101T							

Frequency (MHz)	RAW Horiz dBuV	RAW Vert dBuV	Antenna Factor dBuV	Duty Cycle Correction factor	Horiz dBuV	Vert dBuV	Horiz Margin dBuV	Vert Margin dBuV	Limit dBuV
355	53.6	51.54	18.2	-9.94	61.86	59.8	-7.94	-10	69.8
710	14.94	13.84	26.8	-9.94	31.8	30.7	-18	-19.1	49.8
1065	10.44	4.94	31.8	-9.94	32.3	26.8	-17.5	-23	49.8
1420	8.14	10.6	33.9	-9.94	32.1	34.56	-17.7	-15.24	49.8
1775	12.54	11.84	37.1	-9.94	39.7	39	-10.1	-10.8	49.8

#### **Test Equipment Setup/Comments**

RBW & VBW= 100 kHz (30 - 1000 MHz)

RBW & VBW= 1MHz (1 - 5 GHz)

MEASUREMENTS WERE TAKEN FROM 30 MHz UP TO THE 10TH HARMONIC

The above RAW readings are Peak readings. Duty cycle correction and antenna factors applied with results under Horiz and Vert.

Radiated Emissions FCC Section 15.205 and 15.231 (e)								
Report	port # 20511 Test Distance 3 meters							
Date	3/04/2002	Test Conditions	Units Rotation arrow DOWN					
EUT	Wireless Tire Pressure Sensor/Transmitter							
Model	PNZ1101T							
Mfg.	Xilor							
FCC ID	PNZ1101T							

Frequency (MHz)	RAW Horiz dBuV	RAW Vert dBuV	Antenna Factor dBuV	Duty Cycle Correction factor	Horiz dBuV	Vert dBuV	Horiz Margin dBuV	Vert Margin dBuV	Limit dBuV
355	50.84	53.04	18.2	-9.94	59.1	61.3	-10.7	-8.5	69.8
710	12.64	17.24	26.8	-9.94	29.5	34.1	-20.3	-15.7	49.8
1065	4.94	13.04	31.8	-9.94	26.8	34.9	-23	-14.9	49.8
1420	7.14	15.04	33.9	-9.94	31.1	39	-18.7	-10.8	49.8
1775	8.54	12.04	37.1	-9.94	35.7	39.2	-14.1	-10.6	49.8

## Test Equipment Setup/Comments

RBW & VBW= 100 kHz (30 - 1000 MHz)

RBW & VBW= 1MHz (1 - 5 GHz)

MEASUREMENTS WERE TAKEN FROM 30 MHz UP TO THE 10TH HARMONIC

The above RAW readings are Peak readings. Duty cycle correction and antenna factors applied with results under Horiz and Vert.

	Radiated Emissions FCC Section 15.205 and 15.231 (e)							
Report	eport # 20511 Test Distance 3 meters							
Date	3/04/2002	Test Conditions	Units Rotation arrow UP					
EUT	Wireless Tire Pressure Sensor/Transmitter							
Model	PNZ1101T							
Mfg.	Xilor							
FCC ID	PNZ1101T							

Frequency (MHz)	RAW Horiz dBuV	RAW Vert dBuV	Antenna Factor dBuV	Duty Cycle Correction factor	Horiz dBuV	Vert dBuV	Horiz Margin dBuV	Vert Margin dBuV	Limit dBuV
355	52.54	53.74	18.2	-9.94	60.8	62	-9	-7.8	69.8
710	11.84	16.94	26.8	-9.94	28.7	33.8	-21.1	-16	49.8
1065	5.54	13.64	31.8	-9.94	27.4	35.5	-22.4	-14.3	49.8
1420	8.74	15.14	33.9	-9.94	32.7	39.1	-17.1	-10.7	49.8
1775	11.54	12.04	37.1	-9.94	38.7	39.2	-11.1	-10.6	49.8

## Test Equipment Setup/Comments

RBW & VBW= 100 kHz (30 - 1000 MHz)

RBW & VBW= 1MHz (1 - 5 GHz)


MEASUREMENTS WERE TAKEN FROM 30 MHz UP TO THE 10TH HARMONIC


The above RAW readings are Peak readings. Duty cycle correction and antenna factors applied with results under Horiz and Vert.

#### PEAK TO AVERAGE CORRECTION FACTOR

## **Model PNZ1101T Carrier Frequency 355MHz**

Pulse Width (mS)	Number of Pulses	ON Time (mS)
0.22	1	0.22
0.24	1	0.24
0.26	2	0.52
0.64	2	1.28
0.66	2	1.32
0.68	1	0.68
Max on Time (mS)		4.26
Period (mS)		13.38
Duty Cycle (Max on Time / Period)		0.31838565
Correction Factor (dB)	20Log(Duty Cycle)	-9.94

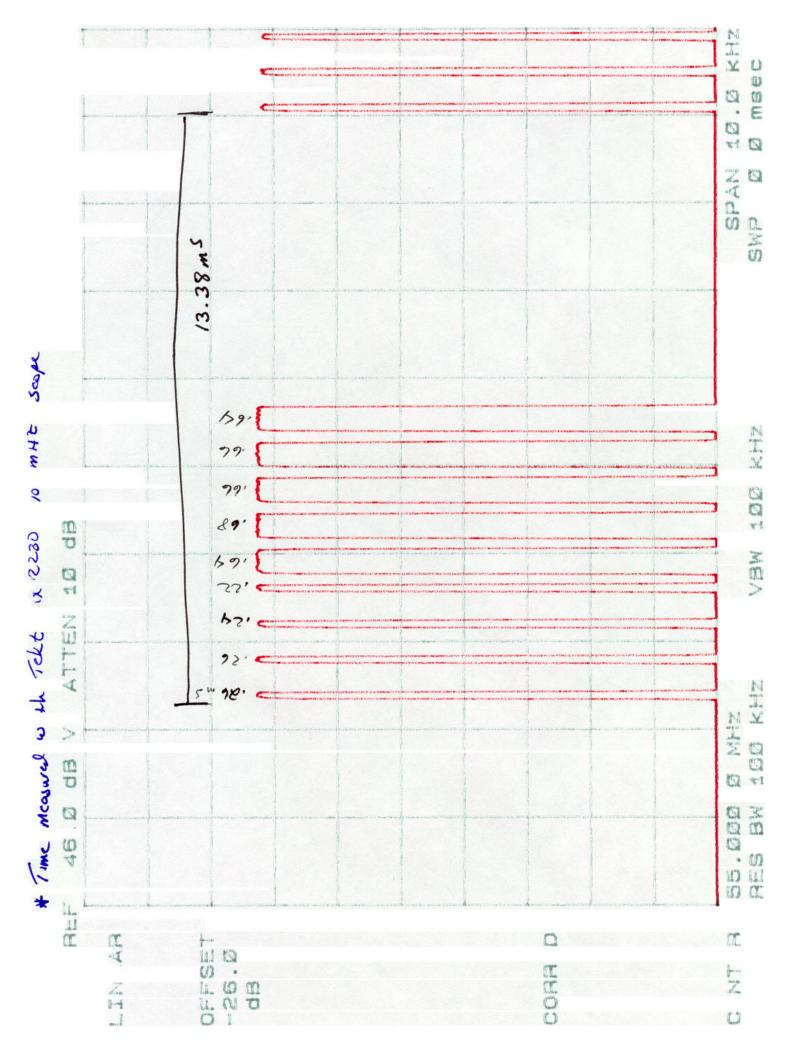

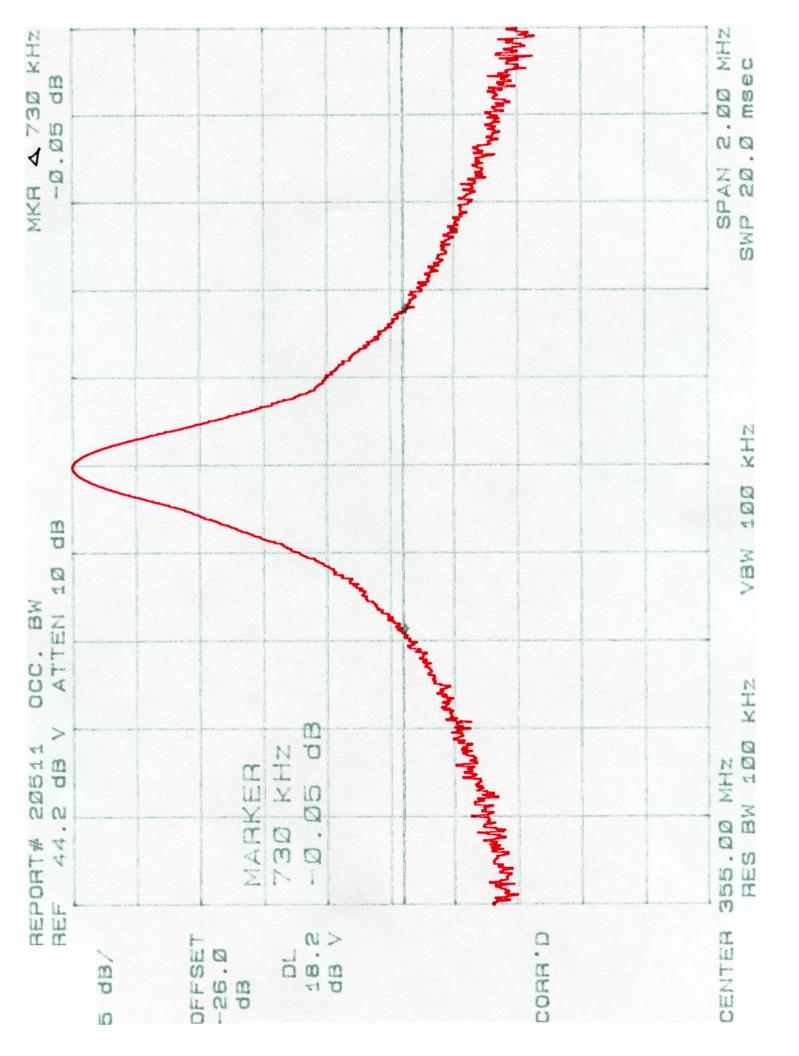

Philips Testing Service						
PCEC Asset #	Description	Model	S/N	Mfg.	Cal Date	Cal Due
T29655	Spectrum Analyzer	8568B	2314A02597	HP	03-28-01	03-28-02
T33179	Oscilloscope	2230	25795	Tektronix	04-23-01	07-30-02
T33858	Antenna	3102	9003-2790	EMCO	05-26-01	05-28-02
EX1523	Antenna	3110B	9304-1679	EMCO	08-02-00	11-02-01
EX1664	Antenna	3146	9502-3974	EMCO	08-02-00	11-02-01
T33167	RF Preselector	85685A	2724A00627	HP	12-29-00	12-28-01
T37815	Spectrum Analyzer	8566B	3014A06612	HP	05-17-01	05-17-02
T33168	Quasi Peak Adapter	85650A	2521A01001	HP	12-13-00	12-013-01