
FCC Part 90 Rules Test Report

Report No.: AGC01039140701FE10

FCC ID : PODDM-UVF10

PRODUCT DESIGNATION : DPMR Digital Transceiver

BRAND NAME : TYT, Infinity

MODEL NAME : DM-UVF10, K911-AD1, DM-UVF12

CLIENT : TYT ELECTRONICS CO., LTD

DATE OF ISSUE : Sep.12, 2014

STANDARD(S) : FCC Part 90 Rules

REPORT VERSION : V 1.0

Attestation of *Global Compliance (Shenzhen) Co., Ltd*

CAUTION: This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Sep.12, 2014	Valid	Original Report

VERIFICATION OF COMPLIANCE

Applicant:	TYT ELECTRONICS CO., LTD
	Block 39-1, Optoelectronics-information industry base, Nan'an, quanzhou, Fujian
Manufacturer:	TYT ELECTRONICS CO., LTD
	Block 39-1, Optoelectronics-information industry base, Nan'an, quanzhou, Fujian
Product Designation:	DPMR Digital Transceiver
Brand Name:	TYT, Infinity
Test Model	DM-UVF10
Series Model	K911-AD1, DM-UVF12
Difference description	All the same except for the model name.
Date of Test:	Sep.08, 2014 to Sep.10, 2014

WE HEREBY CERTIFY THAT:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C 63.4:2009. The sample tested as described in this report is in compliance with the FCC Rules Part 90 requirements

The test results of this report relate only to the tested sample identified in this report.


Tested by	
	Freddie Duan Sep.12, 2014
Checked By	
	Kidd Yang Sep.12, 2014
Authorized By	
	Solger Zhang Sep.12, 2014

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	6
1.1 PRODUCT DESCRIPTION	6
1.3 TEST METHODOLOGY	7
1.4 TEST FACILITY	7
1.5 SPECIAL ACCESSORIES	7
1.6 EQUIPMENT MODIFICATIONS	7
2. SYSTEM TEST CONFIGURATION	8
2.1 EUT CONFIGURATION	8
2.2 EUT EXERCISE	8
2.3 GENERAL TECHNICAL REQUIREMENTS.....	8
2.4 CONFIGURATION OF TESTED SYSTEM.....	9
3. SUMMARY OF TEST RESULTS	10
4. DESCRIPTION OF TEST MODES.....	11
5. CONDUCTED LIMITS.....	12
5.1 PROVISIONS APPLICABLE.....	12
5.2 MEASUREMENT PROCEDURE	12
5.3 TEST SETUP BLOCK DIAGRAM	12
5.4 TEST EQUIPMENT USED.....	13
5.5 TEST RESULT	13
6. FREQUENCY TOLERANCE.....	16
6.1 PROVISIONS APPLICABLE.....	16
6.2 MEASUREMENT PROCEDURE	16
6.3 TEST SETUP BLOCK DIAGRAM	17
6.4 TEST EQUIPMENT USED:.....	17
6.5 TEST RESULT	18
7. EMISSION BANDWIDTH.....	17
7.1 PROVISIONS APPLICABLE	30
7.2 MEASUREMENT PROCEDURE	30
7.3 TEST SETUP BLOCK DIAGRAM	30
7.4 MEASUREMENT EQUIPMENT USED:.....	30
7.5 MEASUREMENT RESULT:.....	31
8. UNWANTED RADIATION	31
8.1 PROVISIONS APPLICABLE.....	39
8.2 MEASUREMENT PROCEDURE	39

8.3 TEST SETUP BLOCK DIAGRAM	40
8.4 MEASUREMENT EQUIPMENT USED:	42
8.5 MEASUREMENT RESULTS:	42
8.6 EMISSION MASK PLOT	46
9. MODULATION CHARACTERISTICS	49
9.1 PROVISIONS APPLICABLE	50
9.2 MEASUREMENT METHOD	50
9.3 MEASUREMENT INSTRUMENTS	50
9.4 MEASUREMENT RESULT	51
10. MAXIMUM TRANSMITTER POWER (CONDUCTED OUTPUT POWER)	57
10.1 PROVISIONS APPLICABLE	57
10.2 TEST PROCEDURE	57
10.3 TEST INSTRUMENTS	57
10.4 TEST CONFIGURATION	57
10.5 TEST RESULT	58
10.6 CONDUCT SPURIOUS PLOT	61
11. TRANSMITTER FREQUENCY BEHAVIOR	65
11.1 PROVISIONS APPLICABLE	66
11.2 TEST METHOD	66
11.3 TEST INSTRUMENTS	66
11.4 DESCRIBE LIMIT LINE OF TRANSMITTER FREQUENCY BEHAVIOR	67
11.5 MEASURE RESULT	68
12. RADIATED EMISSION ON RECEIVING MODE	69
12.1 PROVISIONS APPLICABLE	69
12.2 TEST METHOD	69
12.3 TEST INSTRUMENTS	69
12.4 MEASURE RESULT (MEASURED AT 3M USING FCC PART15 B LIMITS)	70
13. AUDIO LOW PASS FILTER RESPONSE	74
13.1 LIMITS	74
13.2. METHOD OF MEASUREMENTS	74
13.3 TEST DATA	75
APPENDIX I	77
PHOTOGRAPHS OF SETUP	79
APPENDIX II	79
EXTERNAL VIEW OF EUT	80

1. GENERAL INFORMATION

1.1 PRODUCT DESCRIPTION

The EUT is a DPMR Digital Transceiver designed for voice communication. It is designed by way of utilizing the FM modulation achieves the system operating.

A major technical description of EUT is described as following:

Communication Type	Voice / Tone only	
Modulation	FM/4FSK	
Emission Type	11K ϕ F3E	
Emission Bandwidth	Analog: HIGH POWER:10.65KHz(UHF), 10.68KHz(VHF) LOW POWER: 10.32KHz(UHF), 10.14KHz(VHF) Digital: HIGH POWER:4.756KHz(UHF), 4.717KHz(VHF) LOW POWER: 4.752KHz(UHF), 4.716KHz(VHF)	
Peak Frequency Deviation	1.78KHz	
Audio Frequency Response	10.88dB	
Maximum Transmitter Power	Analog:26.91 dBm(0.5W), 36.92 dBm(5W) Digital: 26.90 dBm(0.5W), 36.93 dBm(5W)	
Output power Modification	L:0.5W H:5W (It was fixed by the manufacturer, any individual can't arbitrarily change it.)	
Antenna Designation	Detachable	
Power Supply	DC 7.4V, 1800mAh (by battery)	
Adapter Parameter	Input: AC110V-260V, 50/60HZ Output: DC12V, 0.75A	
Limiting Voltage	DC 6.29V-8.51V	
Operation Frequency Range and Channel	Frequency Range: 400MHz to 480MHz (UHF) & 136MHz~174MHz (VHF) Channel Separation: 12.5KHz (Analog), 6.25KHz(Digital)	
	Top Channel: 400.025MHz Centre Channel: 440.025MHz Bottom Channel: 479.975MHz	Top Channel: 136.025MHz Centre Channel: 155.000MHz Bottom Channel: 173.975MHz
Frequency Tolerance	0.787ppm	

1.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: PODDM-UVF10**, filing to comply with the FCC Part 90 requirements.

1.3 TEST METHODOLOGY

The radiated emission testing was performed according to the procedures of ANSI C 63.4: 2009; TIA/EIA 603 and FCC CFR 47 Rules of 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057.

1.4 TEST FACILITY

The test site used to collect the radiated data is located on the address of Attestation of Global Compliance (Shenzhen) Co., Ltd. 2/F., Building 2, No.1-No.4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China. The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003 and IC requirements in documents RS212.

FCC register No.: 259865

1.5 SPECIAL ACCESSORIES

Not available for this EUT intended for grant.

1.6 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2. SYSTEM TEST CONFIGURATION

2.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT EXERCISE

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

2.3 GENERAL TECHNICAL REQUIREMENTS

For FCC Part 90 requirements:

- (1). Section 15.207: Conducted Limits
- (2). Section 90.205: Maximum ERP is dependent upon the station's antenna HAAT and required service area
- (3). Section 90.207: Modulation Characteristic
- (4). Section 90.209: Occupied Bandwidth
- (5). Section 90.210: Emission Mask
- (6). Section 90.213: Frequency Tolerance
- (7). Section 90.214: Transient Frequency Behavior
- (8). Section 15.109: Radiated Emission

2.4 CONFIGURATION OF TESTED SYSTEM

Fig. 2-1 Configuration of Tested System



Table 2-1 Equipment Used in Tested System

Item	Equipment	Model No.	Identifier	Note
1	DPMR Digital Transceiver	DM-UVF10	FCC ID: PODDM-UVF10	EUT

Table 2-2 Cable used in test

Name of Equipment	Manufacturer	Model	Number	Cal. Due
RF Cable	SUIRONG	30MHz-18GHz	2	07/15/2015
Headphone Line	AGC	N/A	1	07/15/2015

3. SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.207	Conducted Emission	Compliant
§90.205	Maximum Transmitter Power	Compliant
§90.207	Modulation Characteristic	Compliant
§90.209	Occupied Bandwidth	Compliant
§90.210	Emission Mask	Compliant
§90.213	Frequency Tolerance	Compliant
§90.214	Transient Frequency Behavior	Compliant
§15.109	Radiated Emission	Compliant

4. DESCRIPTION OF TEST MODES

RF TEST MODES

The EUT (DPMR Digital Transceiver) has been tested under normal operating condition. (The top channel, the middle channel and the bottom channel) are chosen for testing at each channel separation.

Analog:

No.	TEST MODES	CHANNEL SEPARATION
1	Low Channel	12.5 KHz
2	Middle Channel	12.5 KHz
3	High Channel	12.5 KHz

Digital:

No.	TEST MODES	CHANNEL SEPARATION
1	Low Channel	6.25 KHz
2	Middle Channel	6.25 KHz
3	High Channel	6.25 KHz

EMC TEST MODES

No.	TEST MODES
1	Standby Mode

Note: Only the result of the worst case was recorded in the report.

5. CONDUCTED LIMITS

5.1 PROVISIONS APPLICABLE

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the, the radio frequency voltage that is conducted back onto the AC power line on any frequencies within the band 150 KHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50uH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.


Frequency of Emission (MHz)	Conducted Limit(dBuV)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56 *	56 to 46 *
0.5 – 5	56	46
5 – 30	60	50

* Decreases with the logarithm of the frequency.

5.2 MEASUREMENT PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.4.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
4. The EUT received power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes. During the above scans, the emissions were maximized by cable manipulation.

5.3 TEST SETUP BLOCK DIAGRAM

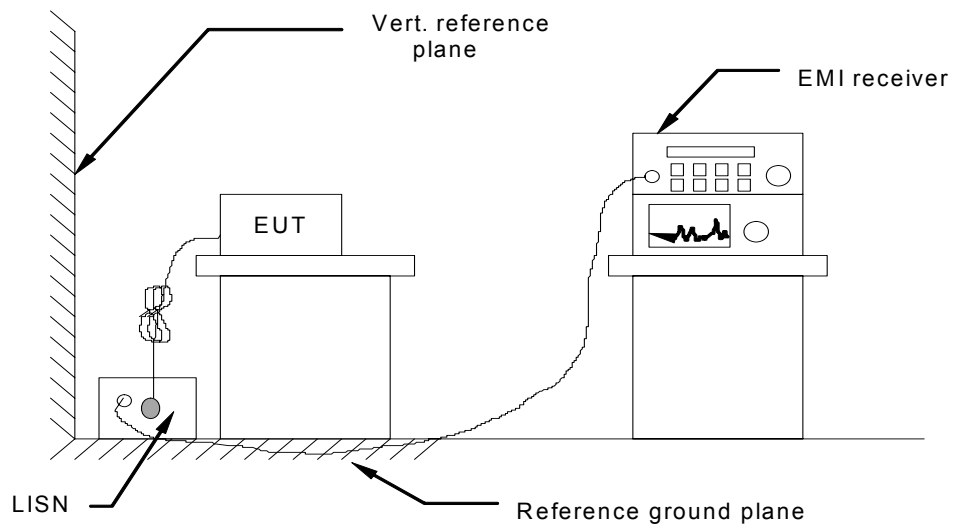

5.4 TEST EQUIPMENT USED


Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model	Serial Number	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	N/A	07/16/2014	07/15/2015
LISN	R&S	ESH3-Z5	N/A	07/16/2014	07/15/2015
RF Cable	SUIRONG	9KHz-30MHz	N/A	07/15/2014	07/15/2015

5.5 TEST RESULT

CONDUCTED EMISSION TEST – LINE L1

SCAN TABLE: "Voltage (150K-30M) FIN"

Short Description: 9k-30M Voltage

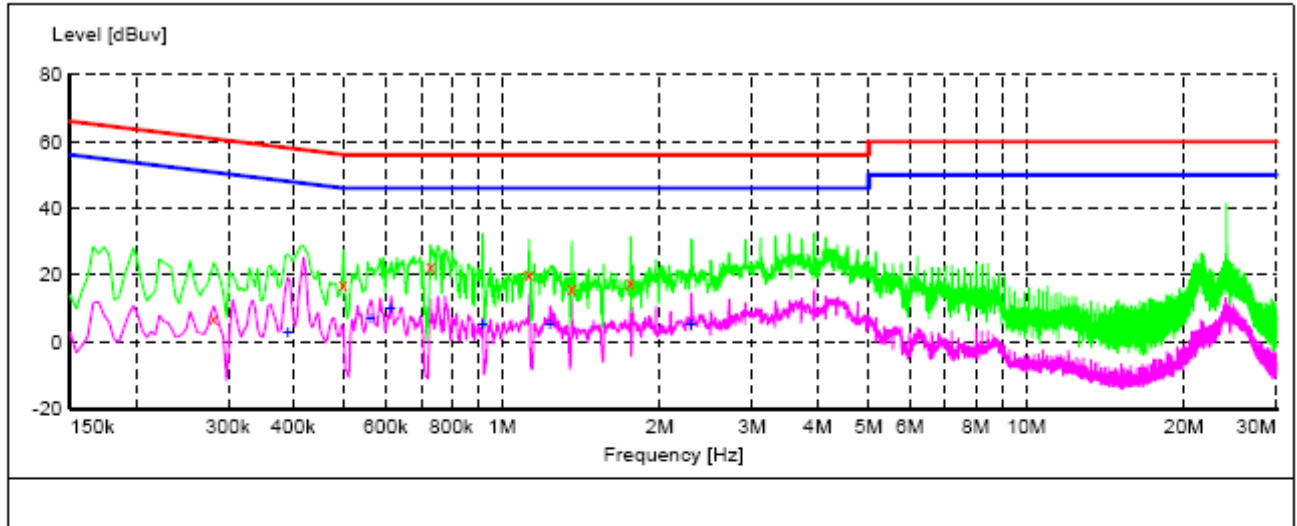

MEASUREMENT RESULT:

Frequency	Level	Transd	Limit	Margin	Detector	Line	PE	AUX STATE
MHz	dBuV	dB	dBuV	dB				
0.282000	7.10	0.2	61	53.7	QP	L1	FLO	ON
0.498000	17.40	0.2	56	38.6	QP	L1	FLO	ON
0.730000	22.40	0.2	56	33.6	QP	L1	FLO	ON
1.126000	20.00	0.2	56	36.0	QP	L1	FLO	ON
1.358000	15.90	0.2	56	40.1	QP	L1	FLO	ON
1.758000	17.70	0.3	56	38.3	QP	L1	FLO	ON


MEASUREMENT RESULT:

Frequency	Level	Transd	Limit	Margin	Detector	Line	PE	AUX STATE
MHz	dBuV	dB	dBuV	dB				
0.390000	3.20	0.2	48	44.9	AV	L1	FLO	ON
0.562000	7.10	0.2	46	38.9	AV	L1	FLO	ON
0.614000	10.30	0.2	46	35.7	AV	L1	FLO	ON
0.918000	5.50	0.2	46	40.5	AV	L1	FLO	ON
1.234000	5.00	0.2	46	41.0	AV	L1	FLO	ON
2.294000	5.40	0.3	46	40.6	AV	L1	FLO	ON

CONDUCTED EMISSION TEST – LINE N

SCAN TABLE: "Voltage (150K-30M) FIN"

Short Description: 9k-30M Voltage

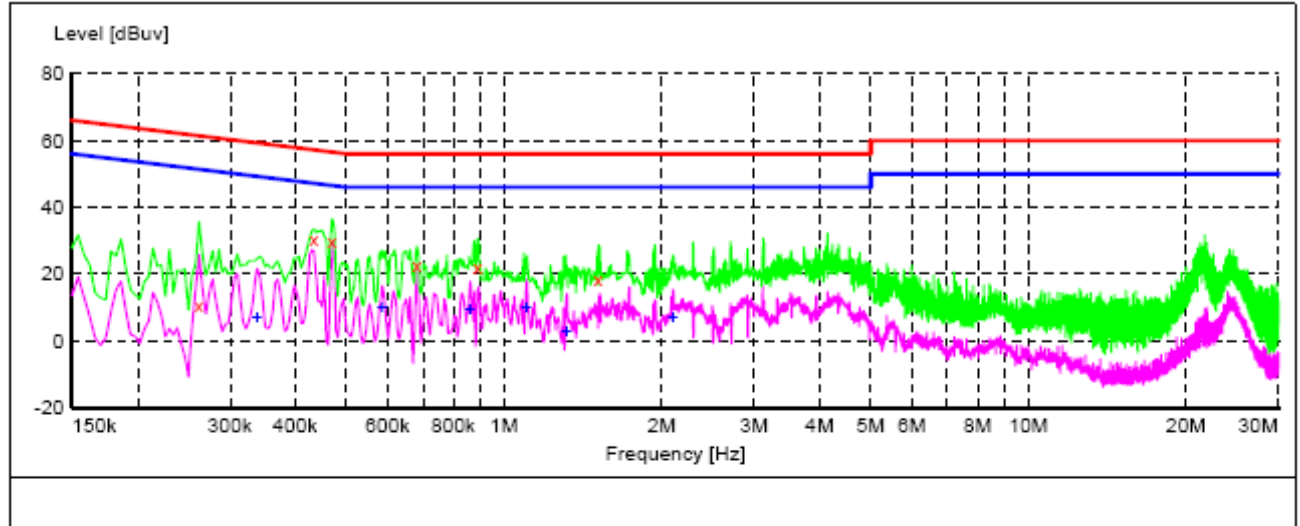**MEASUREMENT RESULT:**

Frequency	Level	Transd	Limit	Margin	Detector	Line	PE	AUX STATE
MHz	dBuV	dB	dBuV	dB				
0.262000	10.70	0.2	61	50.7	QP	N	FLO	ON
0.434000	30.60	0.2	57	26.6	QP	N	FLO	ON
0.470000	29.90	0.2	57	26.6	QP	N	FLO	ON
0.682000	22.70	0.2	56	33.3	QP	N	FLO	ON
0.890000	21.90	0.2	56	34.1	QP	N	FLO	ON
1.514000	18.50	0.2	56	37.5	QP	N	FLO	ON

MEASUREMENT RESULT:

Frequency	Level	Transd	Limit	Margin	Detector	Line	PE	AUX STATE
MHz	dBuV	dB	dBuV	dB				
0.338000	7.30	0.2	49	42.0	AV	N	FLO	ON
0.586000	9.90	0.2	46	36.1	AV	N	FLO	ON
0.862000	9.40	0.2	46	36.6	AV	N	FLO	ON
1.102000	10.10	0.2	46	35.9	AV	N	FLO	ON
1.314000	2.70	0.2	46	43.3	AV	N	FLO	ON
2.102000	7.10	0.3	46	38.9	AV	N	FLO	ON

6. FREQUENCY TOLERANCE

6.1 PROVISIONS APPLICABLE

- a). According to FCC Part 2 Section 2.1055(a)(1), the frequency stability shall be measured with variation of ambient temperature from -30°C to $+50^{\circ}\text{C}$ centigrade.
- b). According to FCC Part 2 Section 2.1055(d)(2), for battery powered equipment, the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point, which is specified by the manufacturer.
- c). According to FCC Part 90 Section 90.213, the frequency tolerance must be maintained within 0.00025% for 12.5 KHz channel separation and 0.0001% for 6.25 KHz channel separation.
- d). According to RSS-119 Section 119.5.3, the frequency tolerance must be maintained within 0.00025% for 12.5 KHz channel separation and 0.0005% for 25KHz channel separation.

6.2 MEASUREMENT PROCEDURE


6.2.1 Frequency stability versus environmental temperature

1. Setup the configuration per figure 1 for frequencies measurement inside an environment chamber, Install new battery in the EUT.
2. Turn on EUT and set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1KHz and Video Resolution Bandwidth to 1KHz and Frequency Span to 50KHz. Record this frequency as reference frequency.
3. Set the temperature of chamber to 50°C . Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
4. Repeat step 2 with a 10°C decreased per stage until the lowest temperature -30°C is measured, record all measured frequencies on each temperature step.

6.2.2 Frequency stability versus input voltage

1. Setup the configuration per figure 1 for frequencies measured at temperature if it is within 15°C to 25°C . Otherwise, an environment chamber set for a temperature of 20°C shall be used. The EUT shall be powered by DC 7.4V.
2. Set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1 KHz and Video Resolution Bandwidth to 1KHz. Record this frequency as reference frequency.
3. Supply the EUT primary voltage at the operating end point which is specified by manufacturer and record the frequency.

6.3 TEST SETUP BLOCK DIAGRAM

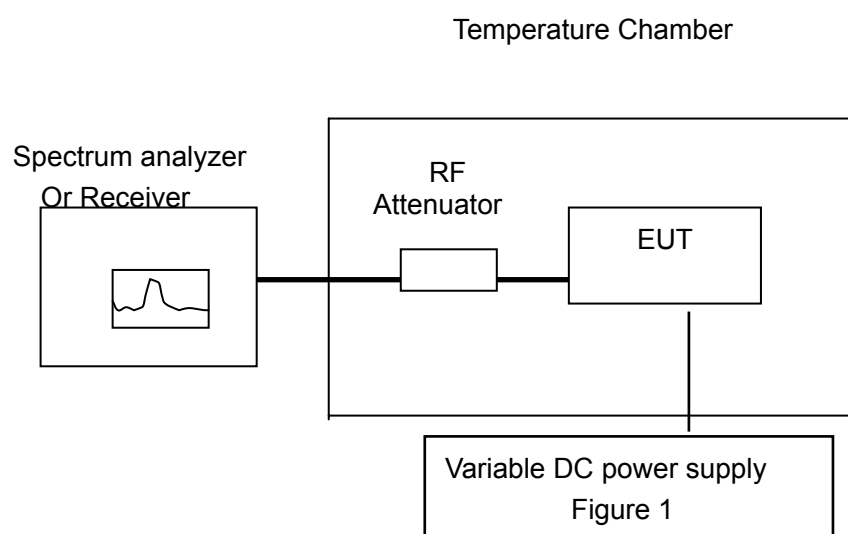

6.4 TEST EQUIPMENT USED:

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	Cal. Date	Cal. Due
RECEIVER	R&S	ESCI	N/A	07/16/2014	07/15/2015
CLIMATE CHAMBER	EXPERY	TN-400	N/A	07/16/2014	07/15/2015
ATTENUATOR	WEINSCHTEL CORP	58-30-33	ML030	07/16/2014	07/15/2015
DC POWER SUPPLY	ZHAOXIN	RXN-605D	N/A	05/16/2014	05/15/2015

TEST RESULT

Analog:

Frequency bands: UHF

(1) Frequency stability versus input voltage (Supply nominal voltage is 7.40V)-5W

Bottom Channel @ 12.5 KHz Channel Separation

Reference Frequency:	400.025 MHz	Limit:	2.5ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 7.40 V	400.025073	0.182
40	DC 7.40 V	400.025064	0.160
30	DC 7.40 V	400.025051	0.127
20	DC 7.40 V	400.025036	0.090
10	DC 7.40 V	400.025055	0.137
0	DC 7.40 V	400.025063	0.157
-10	DC 7.40 V	400.025075	0.187
-20	DC 7.40 V	400.025087	0.217
-30	DC 7.40 V	400.025092	0.230

Middle Channel @ 12.5 KHz Channel Separation

Reference Frequency:	440.025 MHz	Limit:	2.5ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 7.40 V	440.025074	0.168
40	DC 7.40 V	440.025061	0.139
30	DC 7.40 V	440.025053	0.120
20	DC 7.40 V	440.025034	0.077
10	DC 7.40 V	440.025042	0.095
0	DC 7.40 V	440.025056	0.127
-10	DC 7.40 V	440.025062	0.141
-20	DC 7.40 V	440.025071	0.161
-30	DC 7.40 V	440.025097	0.220

Top Channel @ 12.5 KHz Channel Separation

Reference Frequency:	479.975 MHz	Limit:	2.5ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 7.40 V	479.975083	0.173
40	DC 7.40 V	479.975064	0.133
30	DC 7.40 V	479.975054	0.113
20	DC 7.40 V	479.975035	0.073
10	DC 7.40 V	479.975046	0.096
0	DC 7.40 V	479.975053	0.110
-10	DC 7.40 V	479.975076	0.158
-20	DC 7.40 V	479.975087	0.181
-30	DC 7.40 V	479.975095	0.198

Frequency bands: VHF

Bottom Channel @ 12.5 KHz Channel Separation

Reference Frequency:	136.025 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 7.40 V	136.025072	0.529
40	DC 7.40 V	136.025069	0.507
30	DC 7.40 V	136.025052	0.382
20	DC 7.40 V	136.025034	0.250
10	DC 7.40 V	136.025057	0.419
0	DC 7.40 V	136.025065	0.478
-10	DC 7.40 V	136.025077	0.566
-20	DC 7.40 V	136.025086	0.632
-30	DC 7.40 V	136.025094	0.691

Middle Channel @ 12.5 KHz Channel Separation

Reference Frequency:	155.000 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 7.40 V	155.000073	0.471
40	DC 7.40 V	155.000067	0.432
30	DC 7.40 V	155.000054	0.348
20	DC 7.40 V	155.000033	0.213
10	DC 7.40 V	155.000045	0.290
0	DC 7.40 V	155.000056	0.361
-10	DC 7.40 V	155.000062	0.400
-20	DC 7.40 V	155.000078	0.503
-30	DC 7.40 V	155.000093	0.600

Top Channel @ 12.5 KHz Channel Separation

Reference Frequency:	173.975 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 7.40 V	173.975087	0.500
40	DC 7.40 V	173.975061	0.351
30	DC 7.40 V	173.975059	0.339
20	DC 7.40 V	173.975035	0.201
10	DC 7.40 V	173.975047	0.270
0	DC 7.40 V	173.975051	0.293
-10	DC 7.40 V	173.975072	0.414
-20	DC 7.40 V	173.975083	0.477
-30	DC 7.40 V	173.975091	0.523

Frequency bands: UHF

(2) Frequency stability versus input voltage (Battery limiting voltage is 6.29V) -5W

Bottom Channel @ 12.5 KHz Channel Separation

Reference Frequency:	400.025 MHz	Limit:	2.5ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 6.29 V	400.025081	0.202
40	DC 6.29 V	400.025074	0.185
30	DC 6.29 V	400.025052	0.130
20	DC 6.29 V	400.025046	0.115
10	DC 6.29 V	400.025065	0.162
0	DC 6.29 V	400.025072	0.180
-10	DC 6.29 V	400.025086	0.215
-20	DC 6.29 V	400.025094	0.235
-30	DC 6.29 V	400.025102	0.255

Middle Channel @ 12.5 KHz Channel Separation

Reference Frequency:	440.025 MHz	Limit:	2.5ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 6.29 V	440.025083	0.189
40	DC 6.29 V	440.025071	0.161
30	DC 6.29 V	440.025061	0.139
20	DC 6.29 V	440.025042	0.095
10	DC 6.29 V	440.025067	0.152
0	DC 6.29 V	440.025079	0.180
-10	DC 6.29 V	440.025085	0.193
-20	DC 6.29 V	440.025091	0.207
-30	DC 6.29 V	440.025104	0.236

Top Channel @ 12.5 KHz Channel Separation

Reference Frequency:	479.975 MHz	Limit:	2.5ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 6.29 V	479.975083	0.173
40	DC 6.29 V	479.975072	0.150
30	DC 6.29 V	479.975065	0.135
20	DC 6.29 V	479.975047	0.098
10	DC 6.29 V	479.975064	0.133
0	DC 6.29 V	479.975074	0.154
-10	DC 6.29 V	479.975082	0.171
-20	DC 6.29 V	479.975097	0.202
-30	DC 6.29 V	479.975109	0.227

Frequency bands: VHF

Bottom Channel @ 12.5 KHz Channel Separation

Reference Frequency:	136.025 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 6.29 V	136.025089	0.654
40	DC 6.29 V	136.025077	0.566
30	DC 6.29 V	136.025058	0.426
20	DC 6.29 V	136.025044	0.323
10	DC 6.29 V	136.025063	0.463
0	DC 6.29 V	136.025076	0.559
-10	DC 6.29 V	136.025083	0.610
-20	DC 6.29 V	136.025095	0.698
-30	DC 6.29 V	136.025102	0.750

Middle Channel @ 12.5 KHz Channel Separation

Reference Frequency:	155.000 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 6.29 V	155.000083	0.535
40	DC 6.29 V	155.000072	0.465
30	DC 6.29 V	155.000062	0.400
20	DC 6.29 V	155.000045	0.290
10	DC 6.29 V	155.000066	0.426
0	DC 6.29 V	155.000077	0.497
-10	DC 6.29 V	155.000081	0.523
-20	DC 6.29 V	155.000096	0.619
-30	DC 6.29 V	155.000104	0.671

Top Channel @ 12.5 KHz Channel Separation

Reference Frequency:	173.975 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 6.29 V	173.97506	0.345
40	DC 6.29 V	173.975073	0.420
30	DC 6.29 V	173.975062	0.356
20	DC 6.29 V	173.975041	0.236
10	DC 6.29 V	173.975064	0.368
0	DC 6.29 V	173.975072	0.414
-10	DC 6.29 V	173.975084	0.483
-20	DC 6.29 V	173.975097	0.558
-30	DC 6.29 V	173.975105	0.604

Frequency bands:UHF

(3) Frequency stability versus input voltage (Battery Fully Charged voltage is 8.51V) -5W

Bottom Channel @ 12.5 KHz Channel Separation

Reference Frequency:	400.025 MHz	Limit:	2.5ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 8.51 V	400.025085	0.212
40	DC 8.51 V	400.025073	0.182
30	DC 8.51 V	400.025056	0.140
20	DC 8.51 V	400.025044	0.110
10	DC 8.51 V	400.025063	0.157
0	DC 8.51 V	400.025072	0.180
-10	DC 8.51 V	400.025084	0.210
-20	DC 8.51 V	400.025091	0.227
-30	DC 8.51 V	400.025102	0.255

Middle Channel @ 12.5 KHz Channel Separation

Reference Frequency:	440.025 MHz	Limit:	2.5ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 8.51 V	440.025081	0.184
40	DC 8.51 V	440.025073	0.166
30	DC 8.51 V	440.025064	0.145
20	DC 8.51 V	440.025041	0.093
10	DC 8.51 V	440.025066	0.150
0	DC 8.51 V	440.025072	0.164
-10	DC 8.51 V	440.025087	0.198
-20	DC 8.51 V	440.025095	0.216
-30	DC 8.51 V	440.025103	0.234

Top Channel @ 12.5 KHz Channel Separation

Reference Frequency:	479.975 MHz	Limit:	2.5ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 8.51 V	479.975082	0.171
40	DC 8.51 V	479.975077	0.160
30	DC 8.51 V	479.975061	0.127
20	DC 8.51 V	479.975042	0.088
10	DC 8.51 V	479.975061	0.127
0	DC 8.51 V	479.975073	0.152
-10	DC 8.51 V	479.975087	0.181
-20	DC 8.51 V	479.975093	0.194
-30	DC 8.51 V	479.975106	0.221

Frequency bands: VHF

Bottom Channel @ 12.5 KHz Channel Separation

Reference Frequency:	136.025 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 8.51 V	136.025082	0.603
40	DC 8.51 V	136.025075	0.551
30	DC 8.51 V	136.025054	0.397
20	DC 8.51 V	136.025044	0.323
10	DC 8.51 V	136.025065	0.478
0	DC 8.51 V	136.025073	0.537
-10	DC 8.51 V	136.025081	0.595
-20	DC 8.51 V	136.025095	0.698
-30	DC 8.51 V	136.025102	0.750

Middle Channel @ 12.5 KHz Channel Separation

Reference Frequency:	155.000 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 8.51 V	155.000086	0.555
40	DC 8.51 V	155.000073	0.471
30	DC 8.51 V	155.000067	0.432
20	DC 8.51 V	155.000043	0.277
10	DC 8.51 V	155.000065	0.419
0	DC 8.51 V	155.000074	0.477
-10	DC 8.51 V	155.000087	0.561
-20	DC 8.51 V	155.000094	0.606
-30	DC 8.51 V	155.000102	0.658

Top Channel @ 12.5 KHz Channel Separation

Reference Frequency:	173.975 MHz	Limit:	5.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 8.51 V	173.975088	0.506
40	DC 8.51 V	173.975073	0.420
30	DC 8.51 V	173.975064	0.368
20	DC 8.51 V	173.975045	0.259
10	DC 8.51 V	173.975062	0.356
0	DC 8.51 V	173.975077	0.443
-10	DC 8.51 V	173.975082	0.471
-20	DC 8.51 V	173.975095	0.546
-30	DC 8.51 V	173.975108	0.621

Digital:

Frequency bands: UHF

(1) Frequency stability versus input voltage (Supply nominal voltage is 7.40V)-5W

Bottom Channel @ 6.25 KHz Channel Separation

Reference Frequency:	400.025 MHz	Limit:	1.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 7.40 V	400.025074	0.185
40	DC 7.40 V	400.025062	0.155
30	DC 7.40 V	400.025057	0.142
20	DC 7.40 V	400.025036	0.090
10	DC 7.40 V	400.025051	0.127
0	DC 7.40 V	400.025062	0.155
-10	DC 7.40 V	400.025073	0.182
-20	DC 7.40 V	400.025083	0.207
-30	DC 7.40 V	400.025091	0.227

Middle Channel @ 6.25 KHz Channel Separation

Reference Frequency:	440.025 MHz	Limit:	1.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 7.40 V	440.025074	0.168
40	DC 7.40 V	440.025061	0.139
30	DC 7.40 V	440.025053	0.120
20	DC 7.40 V	440.025035	0.080
10	DC 7.40 V	440.025047	0.107
0	DC 7.40 V	440.025052	0.118
-10	DC 7.40 V	440.025069	0.157
-20	DC 7.40 V	440.025073	0.166
-30	DC 7.40 V	440.025094	0.214

Top Channel @ 6.25 KHz Channel Separation

Reference Frequency:	479.975 MHz	Limit:	1.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 7.40 V	479.975083	0.173
40	DC 7.40 V	479.975062	0.129
30	DC 7.40 V	479.975057	0.119
20	DC 7.40 V	479.975031	0.065
10	DC 7.40 V	479.975044	0.092
0	DC 7.40 V	479.975053	0.110
-10	DC 7.40 V	479.975079	0.165
-20	DC 7.40 V	479.975087	0.181
-30	DC 7.40 V	479.975096	0.200

Frequency bands: VHF

Bottom Channel @ 6.25 KHz Channel Separation

Reference Frequency:	136.025 MHz	Limit:	2.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 7.40 V	136.025074	0.544
40	DC 7.40 V	136.025063	0.463
30	DC 7.40 V	136.025052	0.382
20	DC 7.40 V	136.025036	0.265
10	DC 7.40 V	136.025057	0.419
0	DC 7.40 V	136.025069	0.507
-10	DC 7.40 V	136.025077	0.566
-20	DC 7.40 V	136.025082	0.603
-30	DC 7.40 V	136.025086	0.632

Middle Channel @ 6.25 KHz Channel Separation

Reference Frequency:	155.000 MHz	Limit:	2.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 7.40 V	155.000081	0.523
40	DC 7.40 V	155.000064	0.413
30	DC 7.40 V	155.000052	0.335
20	DC 7.40 V	155.000035	0.226
10	DC 7.40 V	155.000052	0.335
0	DC 7.40 V	155.000044	0.284
-10	DC 7.40 V	155.000062	0.400
-20	DC 7.40 V	155.000075	0.484
-30	DC 7.40 V	155.000092	0.594

Top Channel @ 6.25 KHz Channel Separation

Reference Frequency:	173.975 MHz	Limit:	2.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 7.40 V	173.975081	0.466
40	DC 7.40 V	173.975073	0.420
30	DC 7.40 V	173.975052	0.299
20	DC 7.40 V	173.975029	0.167
10	DC 7.40 V	173.975044	0.253
0	DC 7.40 V	173.975056	0.322
-10	DC 7.40 V	173.975072	0.414
-20	DC 7.40 V	173.975082	0.471
-30	DC 7.40 V	173.975097	0.558

Frequency bands:UHF

(2) Frequency stability versus input voltage (Battery limiting voltage is 6.29V) -5W

Bottom Channel @ 6.25 KHz Channel Separation

Reference Frequency:	400.025 MHz	Limit:	1.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 6.29 V	400.025082	0.205
40	DC 6.29 V	400.025079	0.197
30	DC 6.29 V	400.025054	0.135
20	DC 6.29 V	400.025046	0.115
10	DC 6.29 V	400.025061	0.152
0	DC 6.29 V	400.025078	0.195
-10	DC 6.29 V	400.025085	0.212
-20	DC 6.29 V	400.025096	0.240
-30	DC 6.29 V	400.025102	0.255

Middle Channel @ 6.25 KHz Channel Separation

Reference Frequency:	440.025 MHz	Limit:	1.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 6.29 V	440.025075	0.170
40	DC 6.29 V	440.025069	0.157
30	DC 6.29 V	440.025063	0.143
20	DC 6.29 V	440.025042	0.095
10	DC 6.29 V	440.025066	0.150
0	DC 6.29 V	440.025071	0.161
-10	DC 6.29 V	440.025084	0.191
-20	DC 6.29 V	440.025091	0.207
-30	DC 6.29 V	440.025104	0.236

Top Channel @ 6.25 KHz Channel Separation

Reference Frequency:	479.975 MHz	Limit:	1.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 6.29 V	479.975082	0.171
40	DC 6.29 V	479.975071	0.148
30	DC 6.29 V	479.975064	0.133
20	DC 6.29 V	479.975043	0.090
10	DC 6.29 V	479.975065	0.135
0	DC 6.29 V	479.975073	0.152
-10	DC 6.29 V	479.975084	0.175
-20	DC 6.29 V	479.975094	0.196
-30	DC 6.29 V	479.975106	0.221

Frequency bands: VHF

Bottom Channel @ 6.25 KHz Channel Separation

Reference Frequency:	136.025 MHz	Limit:	2.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 6.29 V	136.025082	0.603
40	DC 6.29 V	136.025074	0.544
30	DC 6.29 V	136.025051	0.375
20	DC 6.29 V	136.025046	0.338
10	DC 6.29 V	136.025064	0.471
0	DC 6.29 V	136.025072	0.529
-10	DC 6.29 V	136.025083	0.610
-20	DC 6.29 V	136.025094	0.691
-30	DC 6.29 V	136.025107	0.787

Middle Channel @ 6.25 KHz Channel Separation

Reference Frequency:	155.000 MHz	Limit:	2.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 6.29 V	155.000083	0.535
40	DC 6.29 V	155.000071	0.458
30	DC 6.29 V	155.000064	0.413
20	DC 6.29 V	155.000045	0.290
10	DC 6.29 V	155.000066	0.426
0	DC 6.29 V	155.000075	0.484
-10	DC 6.29 V	155.000084	0.542
-20	DC 6.29 V	155.000092	0.594
-30	DC 6.29 V	155.000103	0.665

Top Channel @ 6.25 KHz Channel Separation

Reference Frequency:	173.975 MHz	Limit:	2.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 6.29 V	173.975082	0.471
40	DC 6.29 V	173.975074	0.425
30	DC 6.29 V	173.975065	0.374
20	DC 6.29 V	173.975041	0.236
10	DC 6.29 V	173.975065	0.374
0	DC 6.29 V	173.975072	0.414
-10	DC 6.29 V	173.975086	0.494
-20	DC 6.29 V	173.975097	0.558
-30	DC 6.29 V	173.975108	0.621

Frequency bands: UHF

(3) Frequency stability versus input voltage (Battery Fully Charged voltage is 8.51V) -5W

Bottom Channel @ 6.25 KHz Channel Separation

Reference Frequency:	400.025 MHz	Limit:	1.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 8.51 V	400.025083	0.207
40	DC 8.51 V	400.025072	0.180
30	DC 8.51 V	400.025054	0.135
20	DC 8.51 V	400.025048	0.120
10	DC 8.51 V	400.025066	0.165
0	DC 8.51 V	400.025072	0.180
-10	DC 8.51 V	400.025086	0.215
-20	DC 8.51 V	400.025097	0.242
-30	DC 8.51 V	400.025109	0.272

Middle Channel @ 6.25 KHz Channel Separation

Reference Frequency:	440.025 MHz	Limit:	1.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 8.51 V	440.025082	0.186
40	DC 8.51 V	440.025071	0.161
30	DC 8.51 V	440.025063	0.143
20	DC 8.51 V	440.025047	0.107
10	DC 8.51 V	440.025065	0.148
0	DC 8.51 V	440.025072	0.164
-10	DC 8.51 V	440.025086	0.195
-20	DC 8.51 V	440.025097	0.220
-30	DC 8.51 V	440.025106	0.241

Top Channel @ 6.25 KHz Channel Separation

Reference Frequency:	479.975 MHz	Limit:	1.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 8.51 V	479.975081	0.169
40	DC 8.51 V	479.975073	0.152
30	DC 8.51 V	479.975065	0.135
20	DC 8.51 V	479.975042	0.088
10	DC 8.51 V	479.975064	0.133
0	DC 8.51 V	479.975072	0.150
-10	DC 8.51 V	479.975086	0.179
-20	DC 8.51 V	479.975097	0.202
-30	DC 8.51 V	479.975101	0.210

Frequency bands: VHF

Bottom Channel @ 6.25 KHz Channel Separation

Reference Frequency:	136.025 MHz	Limit:	2.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 8.51 V	136.025082	0.603
40	DC 8.51 V	136.025073	0.537
30	DC 8.51 V	136.025051	0.375
20	DC 8.51 V	136.025047	0.346
10	DC 8.51 V	136.025065	0.478
0	DC 8.51 V	136.025073	0.537
-10	DC 8.51 V	136.025082	0.603
-20	DC 8.51 V	136.025093	0.684
-30	DC 8.51 V	136.025107	0.787

Middle Channel @ 6.25 KHz Channel Separation

Reference Frequency:	155.000 MHz	Limit:	2.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 8.51 V	155.000086	0.555
40	DC 8.51 V	155.000078	0.503
30	DC 8.51 V	155.000067	0.432
20	DC 8.51 V	155.000043	0.277
10	DC 8.51 V	155.000063	0.406
0	DC 8.51 V	155.000072	0.465
-10	DC 8.51 V	155.000084	0.542
-20	DC 8.51 V	155.000097	0.626
-30	DC 8.51 V	155.000102	0.658

Top Channel @ 6.25 KHz Channel Separation

Reference Frequency:	173.975 MHz	Limit:	2.0ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 8.51 V	173.975089	0.512
40	DC 8.51 V	173.975076	0.437
30	DC 8.51 V	173.975067	0.385
20	DC 8.51 V	173.975042	0.241
10	DC 8.51 V	173.975064	0.368
0	DC 8.51 V	173.975077	0.443
-10	DC 8.51 V	173.975086	0.494
-20	DC 8.51 V	173.975095	0.546
-30	DC 8.51 V	173.975103	0.592

7. EMISSION BANDWIDTH

7.1 PROVISIONS APPLICABLE


According to FCC Part 90 Section 90.209: The authorized bandwidth shall be 11.25 KHz for 12.5 KHz channel separation and 6 KHz for 6.25 KHz channel separation.

According to RSS-119 Section 119.5.5: The authorized bandwidth shall be 11.25 KHz for 12.5 KHz

7.2 MEASUREMENT PROCEDURE

- 1). The EUT was placed on a turn table which is 0.8m above ground plane.
- 2). The EUT was modulated by 2.5 KHz Sine wave audio signal, The level of the audio signal employed is 16 dB greater than that necessary to produce 50% of rated system deviation. Rated system deviation is 2.5 kHz (12.5 kHz channel spacing).
- 3). Set SPA Center Frequency = fundamental frequency, RBW=VBW= 300 Hz, Span =50 KHz.
- 4). Set SPA Max hold. Mark peak, -26 dB.

7.3 TEST SETUP BLOCK DIAGRAM

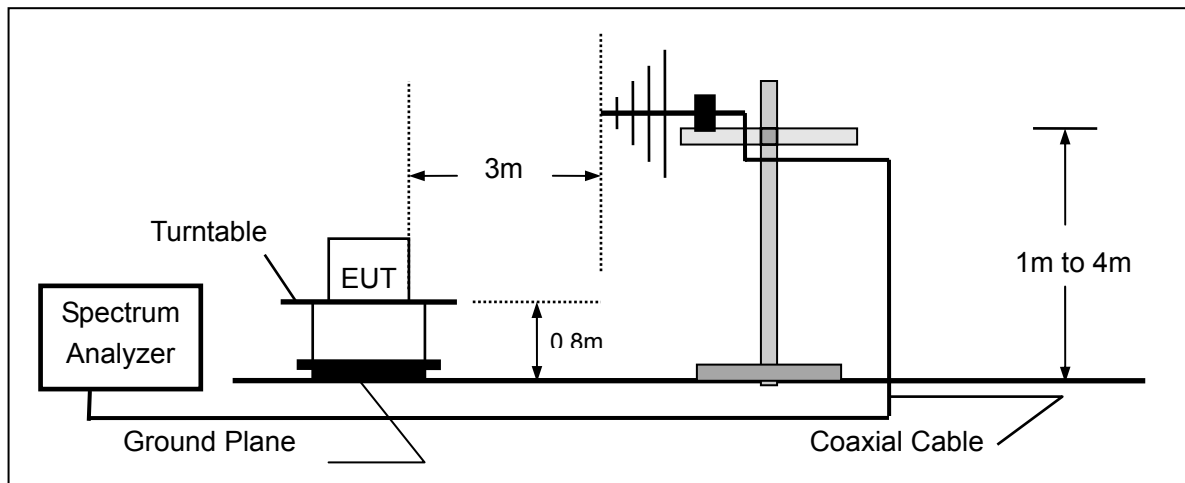


7.4 MEASUREMENT EQUIPMENT USED:

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	Cal. Date	Cal. Due
SPECTRUM ANALYZER	AGILENT	E4440A	US44300399	07/16/2014	07/15/2015
MODULATION ANALYZER	HP	8920B	3104A03367	07/16/2014	07/15/2015
BROADBAND ANT.	A.H.	SAS-521-4	A0304224	07/16/2014	07/15/2015
ATTENUATOR	WEINSCHEL CORP	58-30-33	ML030	07/16/2014	07/15/2015
HEADPHONE LINE	AGC	N/A	N/A	N/A	N/A

26 DB BANDWIDTH MEASUREMENT RESULT			
Operating Frequency	12.5 KHz Channel Separation		
	Test Data	Limits	Result
400.025MHz	10.65KHz	11.25 KHz	Pass
440.000MHz	10.62KHz	11.25 KHz	Pass
479.975MHz	10.63KHz	11.25 KHz	Pass


Occupied bandwidth of Low Channel (Maximum)-UHF

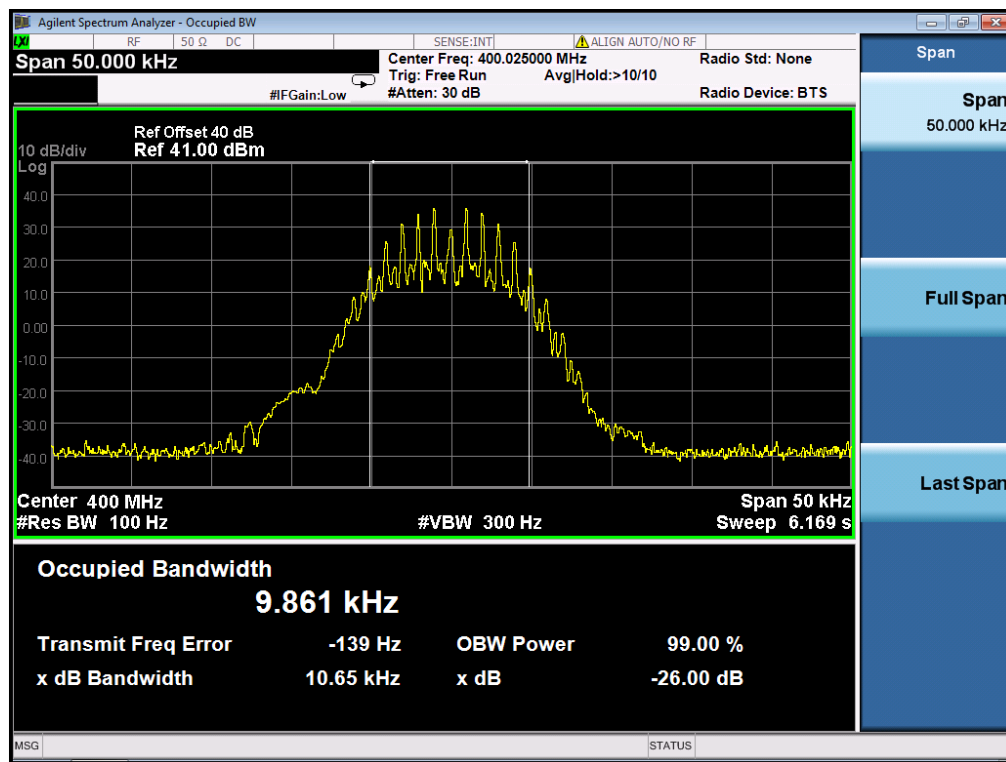

TEST RESULT TS FOR LOW POWER LEVEL


26 DB BANDWIDTH MEASUREMENT RESULT			
Operating Frequency	12.5 KHz Channel Separation		
	Test Data	Limits	Result
136.025MHz	10.11KHz	11.25 KHz	Pass
155.000MHz	10.14KHz	11.25 KHz	Pass
173.975MHz	10.12KHz	11.25 KHz	Pass

Occupied bandwidth of Middle Channel (Maximum)-VHF

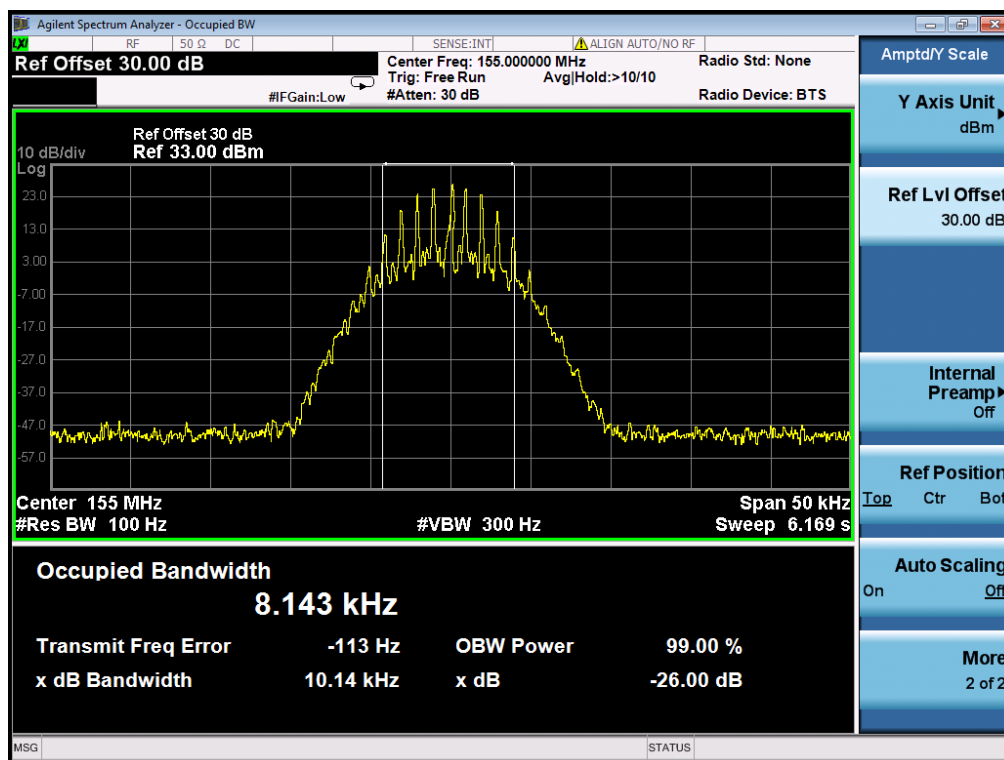

26 DB BANDWIDTH MEASUREMENT RESULT			
Operating Frequency	12.5 KHz Channel Separation		
	Test Data	Limits	Result
400.025MHz	10.32KHz	11.25 KHz	Pass
440.025MHz	10.29KHz	11.25 KHz	Pass
479.975MHz	10.31KHz	11.25 KHz	Pass

Occupied bandwidth of Low Channel (Maximum)-UHF

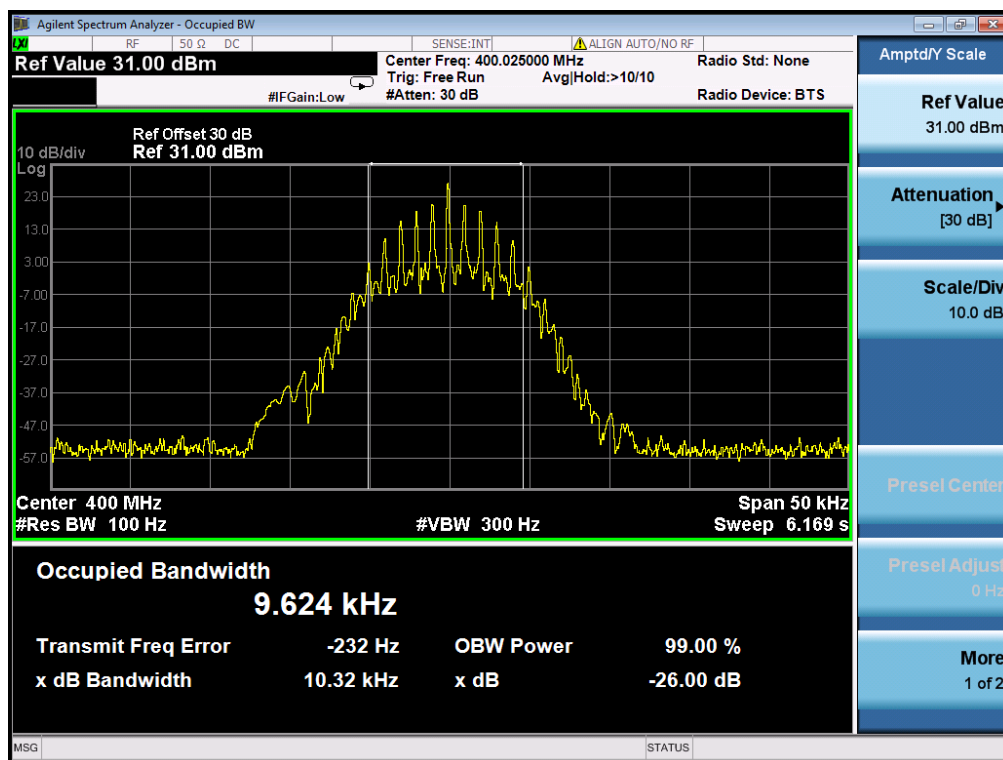


Digital:

TEST RESULT TS FOR HIGH POWER LEVEL


26 DB BANDWIDTH MEASUREMENT RESULT			
Operating Frequency	6.25 KHz Channel Separation		
	Test Data	Limits	Result
400.025MHz	4.756KHz	6.00 KHz	Pass
440.025MHz	4.748KHz	6.00 KHz	Pass
479.975MHz	4.751KHz	6.00 KHz	Pass

Occupied bandwidth of Low Channel (Maximum)-UHF

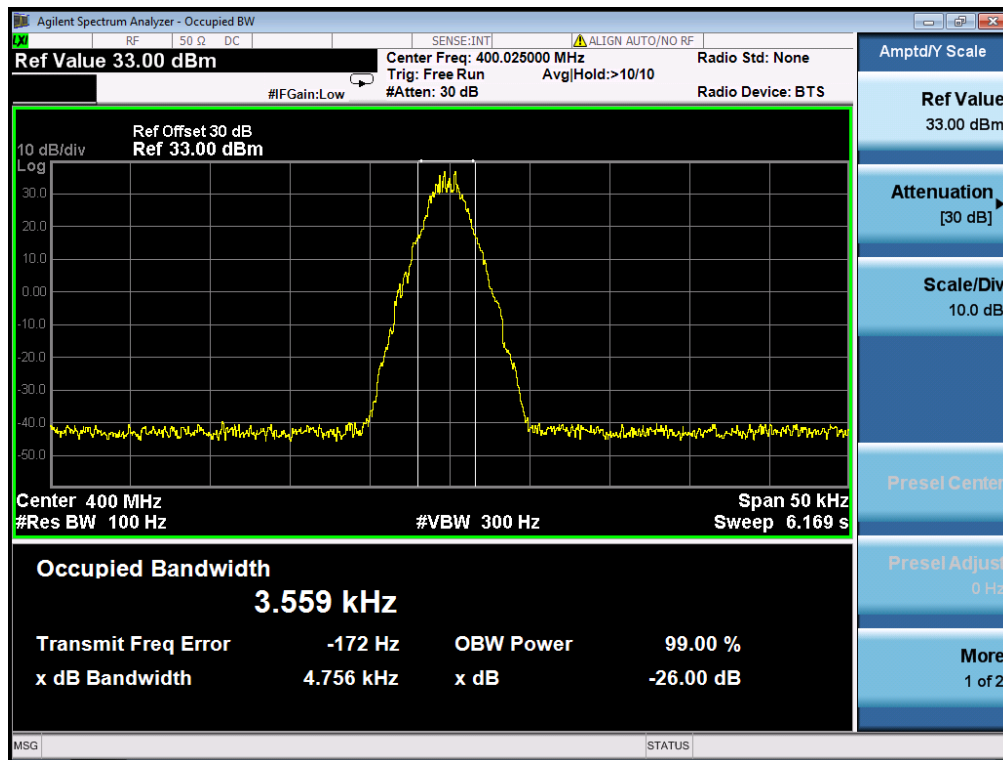

26 DB BANDWIDTH MEASUREMENT RESULT			
Operating Frequency	6.25 KHz Channel Separation		
	Test Data	Limits	Result
136.025MHz	4.701KHz	6.00 KHz	Pass
155.000MHz	4.717KHz	6.00 KHz	Pass
173.975MHz	4.706KHz	6.00 KHz	Pass


Occupied bandwidth of Middle Channel (Maximum)-VHF

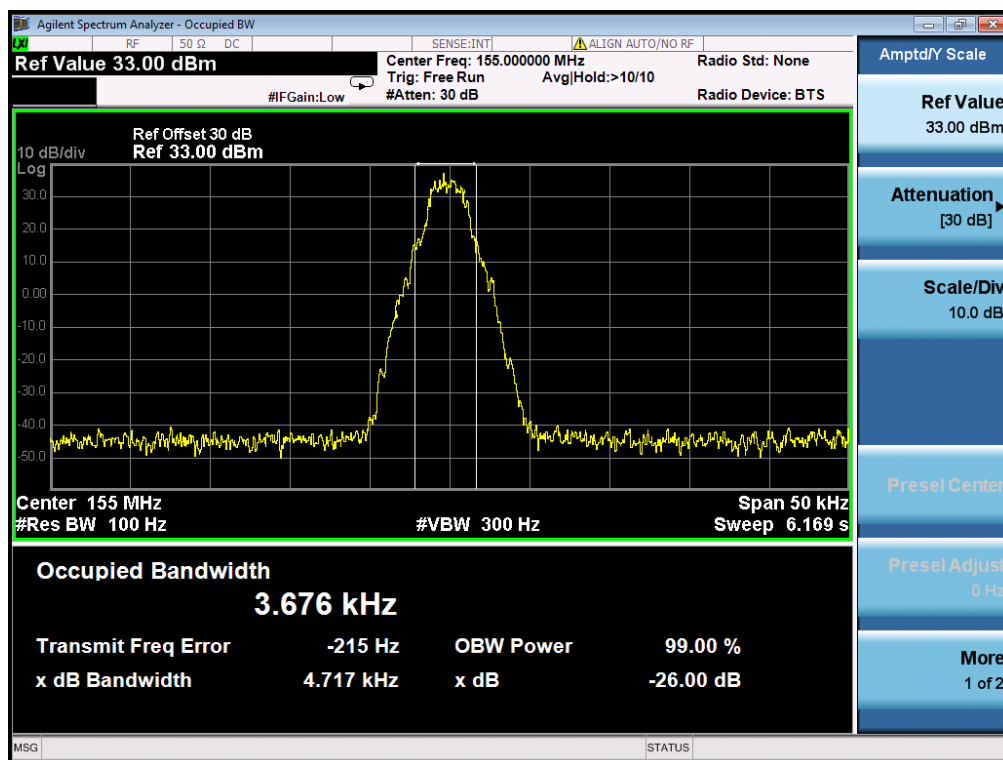

TEST RESULT TS FOR LOW POWER LEVEL


26 DB BANDWIDTH MEASUREMENT RESULT			
Operating Frequency	6.25 KHz Channel Separation		
	Test Data	Limits	Result
136.025MHz	4.702KHz	6.00 KHz	Pass
155.000MHz	4.716KHz	6.00 KHz	Pass
173.975MHz	4.712KHz	6.00 KHz	Pass

Occupied bandwidth of Middle Channel (Maximum)-VHF

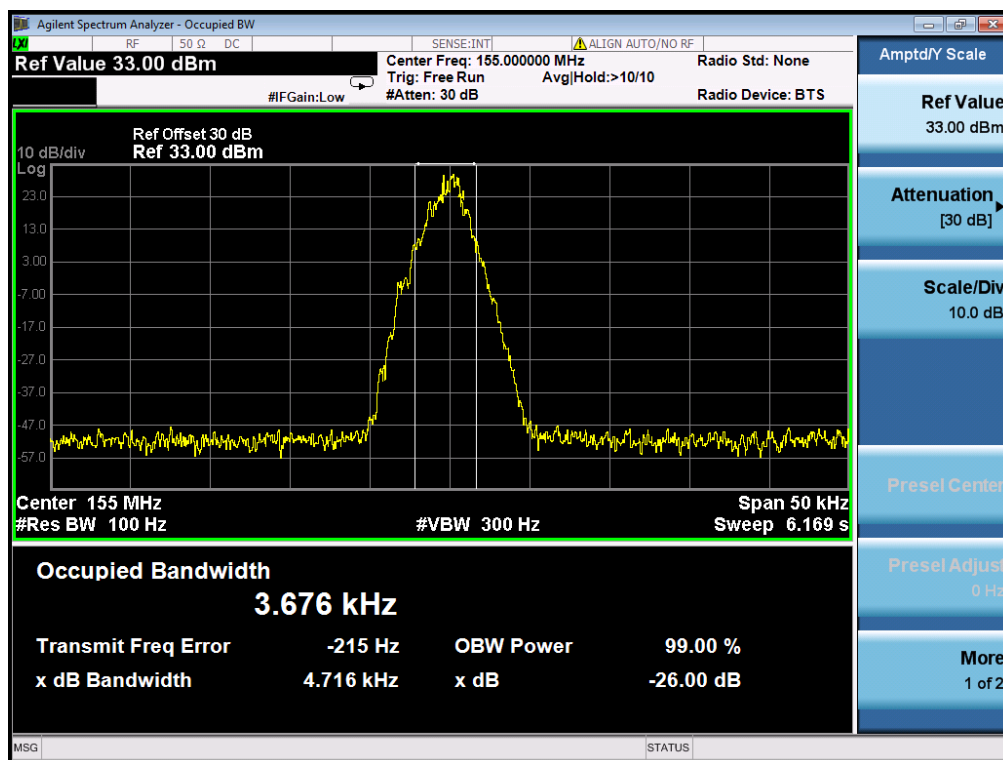

26 DB BANDWIDTH MEASUREMENT RESULT			
Operating Frequency	6.25 KHz Channel Separation		
	Test Data	Limits	Result
400.025MHz	4.752KHz	6.00 KHz	Pass
440.025MHz	4.734KHz	6.00 KHz	Pass
479.975MHz	4.741KHz	6.00 KHz	Pass

Occupied bandwidth of Low Channel (Maximum)-UHF

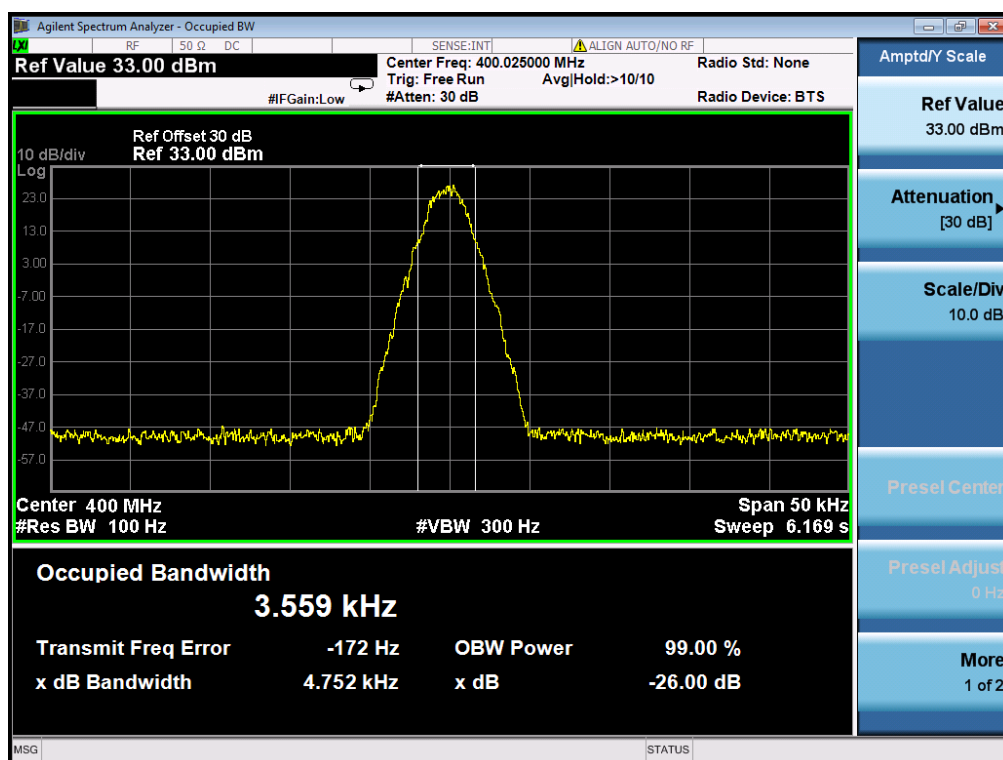

8. UNWANTED RADIATION

8.1 PROVISIONS APPLICABLE

8.1.1 According to Section 90.210, the power of each unwanted emission shall be less than Transmitted Power as specified below for transmitters designed to operate with each channel separation.

According to RSS-119 Section 119.5.8, the power of each unwanted emission shall be less than Transmitted Power as specified below for transmitters with each channel separation.

For 12.5 KHz Channel Separation:

- (1). On any frequency removed from the center of the authorized bandwidth f_o to 5.625 KHz removed from f_o : Zero dB.
- (2). On any frequency removed from the center of the authorized bandwidth by a displacement Frequency (f_d in KHz) f_o of more than 5.625 KHz but no more than 12.5 KHz: At least $7.27(f_d - 2.88 \text{ KHz})$ dB
- (3). On any frequency removed from the center of the authorized bandwidth by a displacement Frequency (f_d in KHz) f_o of more than 12.5 KHz: At least $50 + 10 \log(P)$ dB or 70 dB, whichever is lesser attenuation.

For 6.25 KHz Channel Separation:


- (1). On any frequency from the center of the authorized bandwidth f_o to 3.0 kHz removed from f_o : Zero dB.
- (2). On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 3.0 kHz but no more than 4.6 kHz: At least $30 + 16.67(f_d - 3 \text{ kHz})$ or $55 + 10 \log(P)$ or 65 dB, whichever is the lesser attenuation.
- (3). On any frequency removed from the center of the authorized bandwidth by more than 4.6 kHz: At least $55 + 10 \log(P)$ or 65 dB, whichever is the lesser attenuation.

8.2 MEASUREMENT PROCEDURE

- (1) On a test site, the EUT shall be placed on a turntable, and in the position closest to the normal use as declared by the user.
- (2) The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the transmitter.
- (3) The output of the antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.
- (4) The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
- (5) The test antenna shall be raised and lowered through the specified range of height until the measuring receiver detects a maximum signal level.
- (6) The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- (7) The test antenna shall be raised and lowered again through the specified range of height until the measuring receiver detects a maximum signal level.


- (8) The maximum signal level detected by the measuring receiver shall be noted.
- (9) The measurement shall be repeated with the test antenna set to horizontal polarization.
- (10) Replace the antenna with a proper Antenna (substitution antenna).
- (11) The substitution antenna shall be oriented for vertical polarization and, if necessary, the length of the substitution antenna shall be adjusted to correspond to the frequency of transmitting.
- (12) The substitution antenna shall be connected to a calibrated signal generator.
- (13) If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- (14) The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.
- (15) The input signal to substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver.
- (16) The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
- (17) The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.

8.3 TEST SETUP BLOCK DIAGRAM

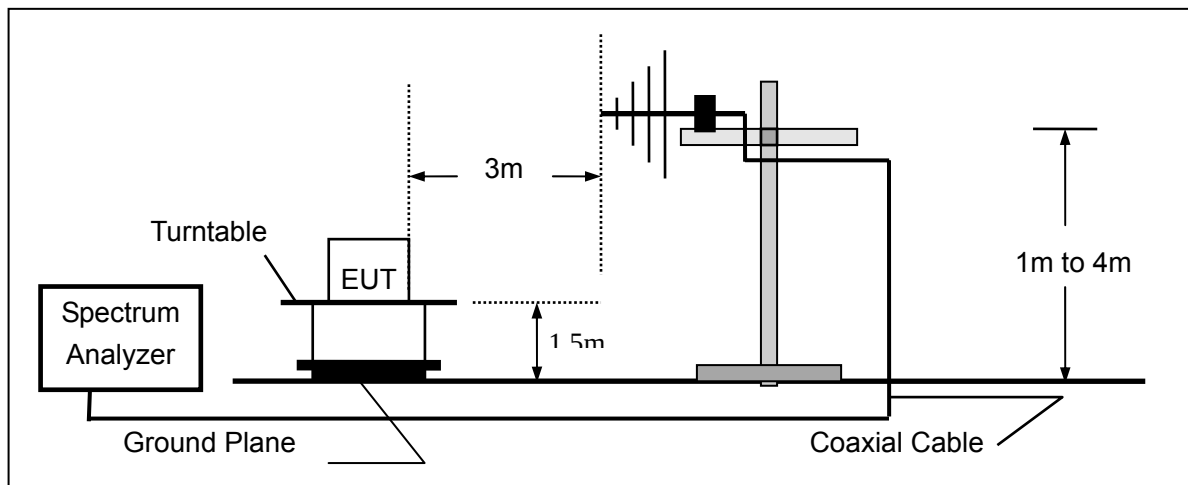


SUBSTITUTION METHOD: (Radiated Emissions)

Radiated Below 1GHz

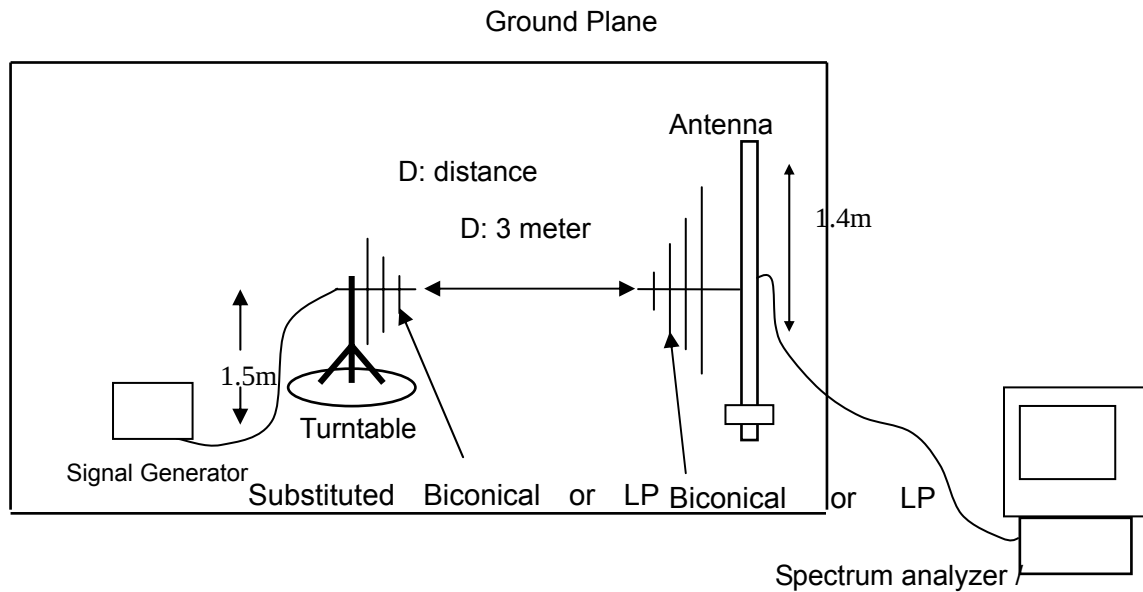

Radiated Above 1 GHz

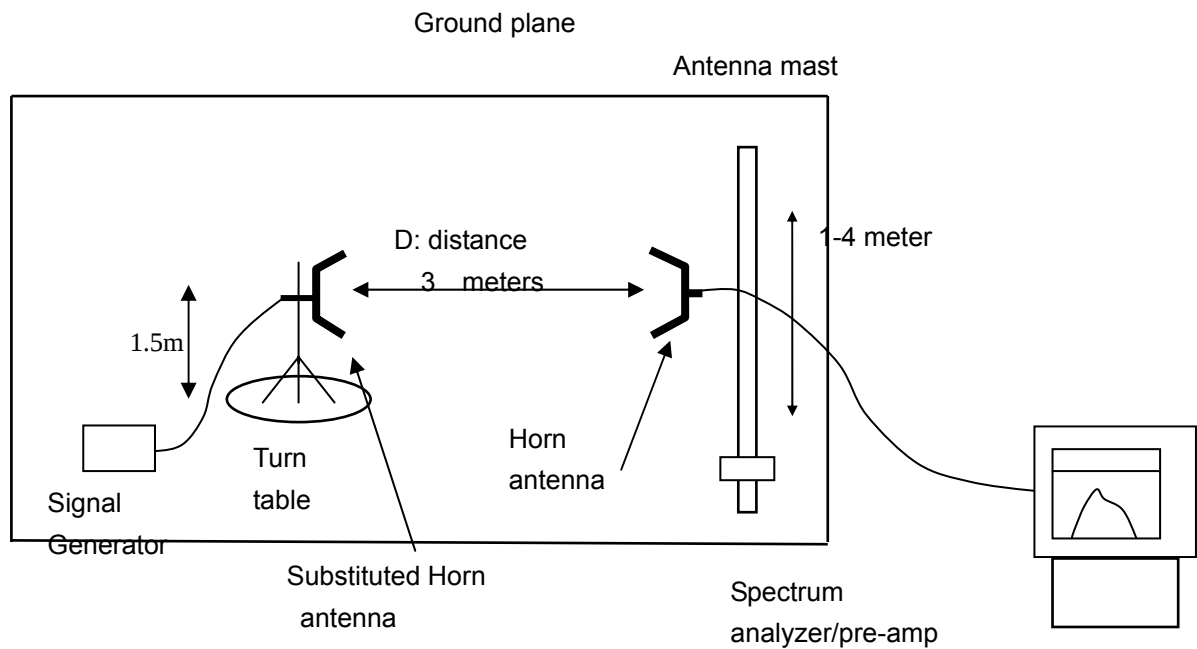

8.4 MEASUREMENT EQUIPMENT USED:

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	Cal. Date	Cal. Due
SPECTRUM ANALYZER	AGILENT	E4440A	US44300399	07/16/2014	07/15/2015
HORN ANT.	EM	EM-AH-10180	100150	04/20/2014	04/19/2015
BROADBAND ANT.	A.H.	SAS-521-4	A0304224	06/06/2014	06/05/2015
AMPLIFIER	EM	EM30180	0607030	07/16/2014	07/15/2015
POSITIONING CONTROLLER	MF	MF-7802	MF780208147	--	--
HORN ANTENNA	A.H. SYSTEMS INC.	SAS-574	--	07/16/2014	07/15/2015
SIGNAL GENERATOR	AGILENT	E4421B	122501288	07/16/2014	07/15/2015
ATTENUATOR	WEINSCHEL CORP	58-30-33	ML030	07/16/2014	07/15/2015

8.5 MEASUREMENT RESULTS:**Measurement Result for 12.5 KHz Channel Separation**

On any frequency removed from the center of the authorized bandwidth by a displacement

Frequency (f_d in KHz) for of more than 12.5 KHz: at least $50+10 \log(P)$ dB or 70 dB, which ever is lesser attenuation.

High Power Limit: At least $50+10 \log(P) = 50+10 \log(5) = 57$ (dB)

Low Power Limit: At least $50+10 \log(P) = 50+10 \log(0.5) = 47$ (dB)

Measurement Result for 6.25 KHz Channel Separation

On any frequency removed from the center of the authorized bandwidth by more than 4.6 kHz:

At least $55 + 10 \log(P)$ or 65 dB, whichever is the lesser attenuation

High Power Limit: At least $55 + 10 \log(P) = 55+10 \log(5) = 62$ (dB)

Low Power Limit: At least $55 + 10 \log(P) = 55+10 \log(0.5) = 52$ (dB)

Analog:

TEST RESULT TS FOR H POWER LEVEL

Measurement Result for 12.5 KHz Channel Separation @ 400.025MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
400.025	V	0		pass
800.050	V	69.26	57	pass
1200.075	V	70.16	57	pass
1600.100	V	70.34	57	pass
2000.125	V	72.53	57	pass
2400.150	V	74.11	57	pass
2800.175	V	75.14	57	pass
3200.200	V	77.55	57	pass
3600.225	V	79.83	57	pass
4000.250	V	81.37	57	pass

Measurement Result for 12.5 KHz Channel Separation @ 440.025MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
400.025	V	0		pass
800.050	V	68.33	57	pass
1200.075	V	69.65	57	pass
1600.100	V	72.64	57	pass
2000.125	V	75.56	57	pass
2400.150	V	76.42	57	pass
2800.175	V	78.25	57	pass
3200.200	V	70.61	57	pass
3600.225	V	80.45	57	pass
4000.250	V	81.23	57	pass

Measurement Result for 12.5 KHz Channel Separation @ 479.975MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
479.975	V	0		pass
959.950	V	69.56	57	pass
1439.925	V	71.34	57	pass
1919.900	V	73.25	57	pass
2399.875	V	74.47	57	pass
2879.850	V	75.46	57	pass
3359.825	V	77.53	57	pass
3839.800	V	79.54	57	pass
4319.775	V	70.48	57	pass
4799.750	V	71.71	57	pass

Measurement Result for 12.5 KHz Channel Separation @ 136.025MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
136.025	V	0		pass
272.050	V	69.28	57	pass
408.08	V	70.17	57	pass
544.100	V	70.32	57	pass
680.125	V	72.52	57	pass
816.150	V	74.12	57	pass
952.175	V	75.15	57	pass
1088.200	V	77.57	57	pass
1224.225	V	79.85	57	pass
1360.250	V	81.36	57	pass

Measurement Result for 12.5 KHz Channel Separation @ 155.000MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
155.000	V	0		pass
310.000	V	68.34	57	pass
465.000	V	69.65	57	pass
620.000	V	72.67	57	pass
775.000	V	75.56	57	pass
930.000	V	76.43	57	pass
1085.000	V	78.29	57	pass
1240.000	V	70.64	57	pass
1395.000	V	80.46	57	pass
1550.000	V	81.23	57	pass

Measurement Result for 12.5 KHz Channel Separation @ 173.975MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
173.975	V	0		pass
347.950	V	69.54	57	pass
521.925	V	71.32	57	pass
695.900	V	73.28	57	pass
869.875	V	74.47	57	pass
1043.850	V	75.46	57	pass
1217.825	V	77.57	57	pass
1391.800	V	79.53	57	pass
1565.775	V	70.48	57	pass
1739.750	V	71.72	57	pass

Digital:

TEST RESULT TS FOR H POWER LEVEL

Measurement Result for 6.25 KHz Channel Separation @ 400.025MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
400.025	V	0		pass
800.050	V	69.88	62	pass
1200.075	V	70.17	62	pass
1600.100	V	70.31	62	pass
2000.125	V	72.53	62	pass
2400.150	V	74.12	62	pass
2800.175	V	75.11	62	pass
3200.200	V	77.53	62	pass
3600.225	V	79.82	62	pass
4000.250	V	81.35	62	pass

Measurement Result for 6.25 KHz Channel Separation @ 440.025MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
440.025	V	0		pass
880.050	V	68.32	62	pass
1320.075	V	69.64	62	pass
1760.100	V	72.64	62	pass
2200.125	V	75.54	62	pass
2640.150	V	76.43	62	pass
3080.175	V	78.27	62	pass
3520.200	V	70.65	62	pass
3960.225	V	80.44	62	pass
4400.250	V	81.25	62	pass

Measurement Result for 6.25 KHz Channel Separation @ 479.975MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
479.975	V	0		pass
959.950	V	69.53	62	pass
1439.925	V	71.34	62	pass
1919.900	V	73.25	62	pass
2399.875	V	74.43	62	pass
2879.850	V	75.47	62	pass
3359.825	V	77.56	62	pass
3839.800	V	79.54	62	pass
4319.775	V	70.47	62	pass
4799.750	V	71.73	62	pass

Measurement Result for 6.25 KHz Channel Separation @ 136.025MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
136.025	V	0		pass
272.050	V	69.27	62	pass
408.08	V	70.18	62	pass
544.100	V	70.32	62	pass
680.125	V	72.52	62	pass
816.150	V	74.14	62	pass
952.175	V	75.14	62	pass
1088.200	V	77.56	62	pass
1224.225	V	79.83	62	pass
1360.250	V	81.34	62	pass

Measurement Result for 6.25 KHz Channel Separation @ 155.000MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
155.000	V	0		pass
310.000	V	68.32	62	pass
465.000	V	69.65	62	pass
620.000	V	72.67	62	pass
775.000	V	75.53	62	pass
930.000	V	75.49	62	pass
1085.000	V	78.29	62	pass
1240.000	V	70.65	62	pass
1395.000	V	80.46	62	pass
1550.000	V	81.23	62	pass

Measurement Result for 6.25 KHz Channel Separation @ 173.975MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
173.975	V	0		pass
347.950	V	69.55	62	pass
521.925	V	71.35	62	pass
695.900	V	73.28	62	pass
869.875	V	74.49	62	pass
1043.850	V	75.46	62	pass
1217.825	V	77.57	62	pass
1391.800	V	79.53	62	pass
1565.775	V	70.48	62	pass
1739.750	V	71.72	62	pass


8.6 EMISSION MASK PLOT

The detailed procedure employed for Emission Mask measurements are specified as following:


- The transmitter shall be modulated by a 2.5 kHz audio signal,
- The level of the audio signal employed is 16 dB greater than that necessary to produce 50% of rated system deviation. Rated system deviation is 2.5 kHz.

Analog:

The Worst Emission Mask D for 12.5 KHz channel Separation (5W)-(VHF)

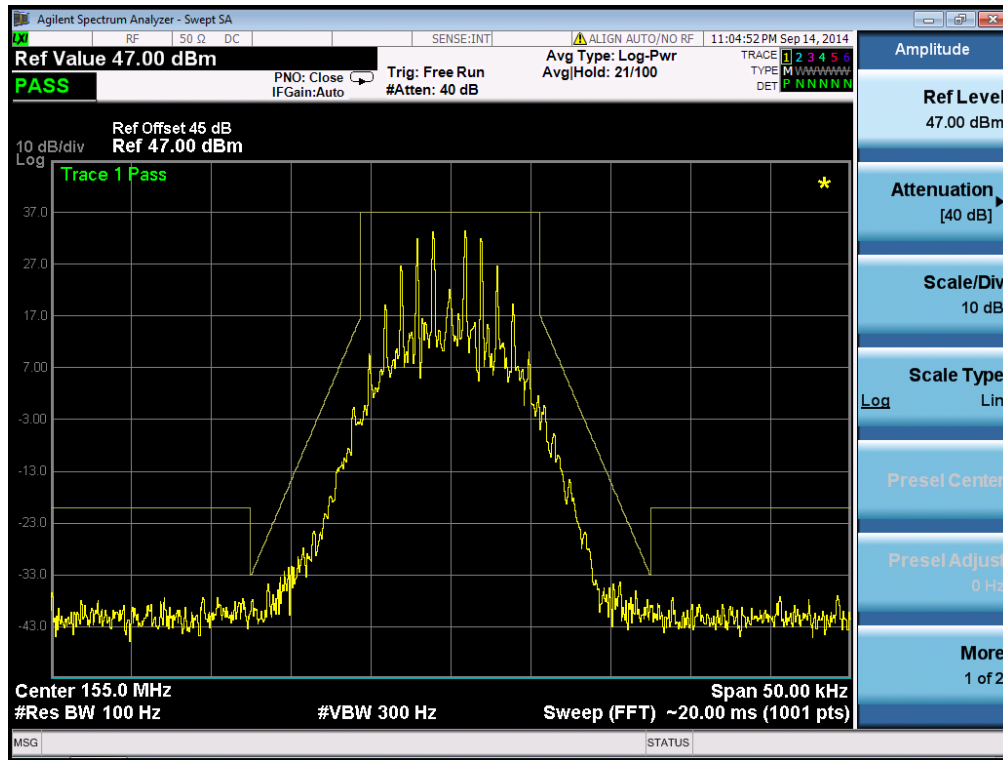


The Worst Emission Mask D for 12.5 KHz channel Separation (0.5W)-(UHF)

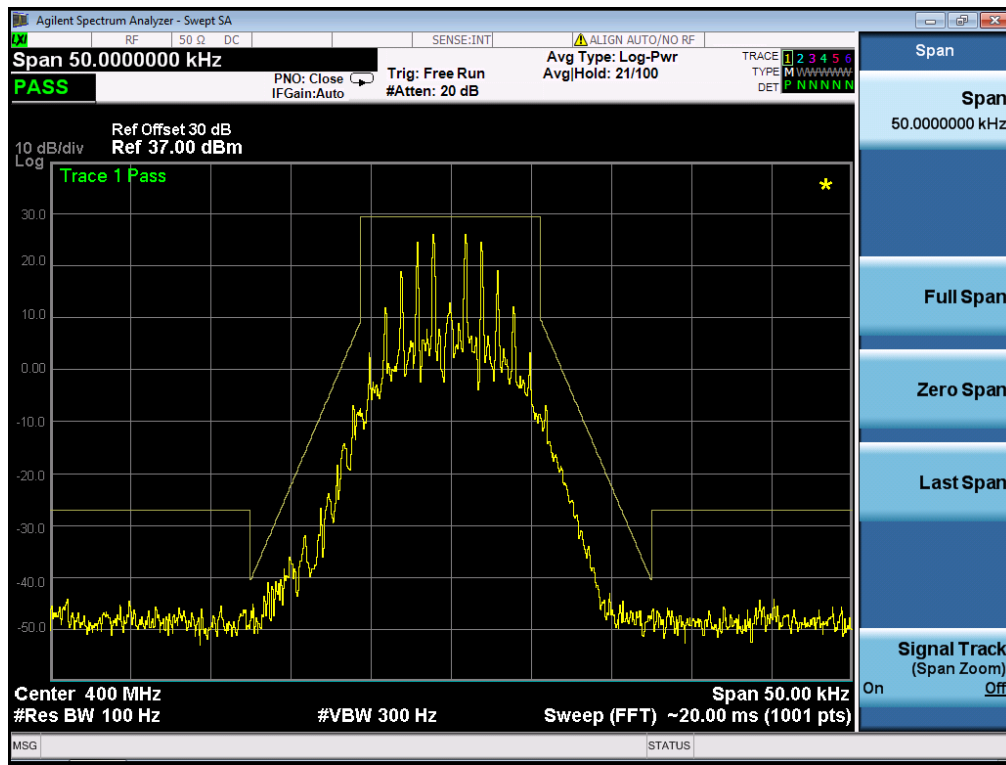


Digital:

The Worst Emission Mask E for 6.25 KHz channel Separation (5W)-(VHF)

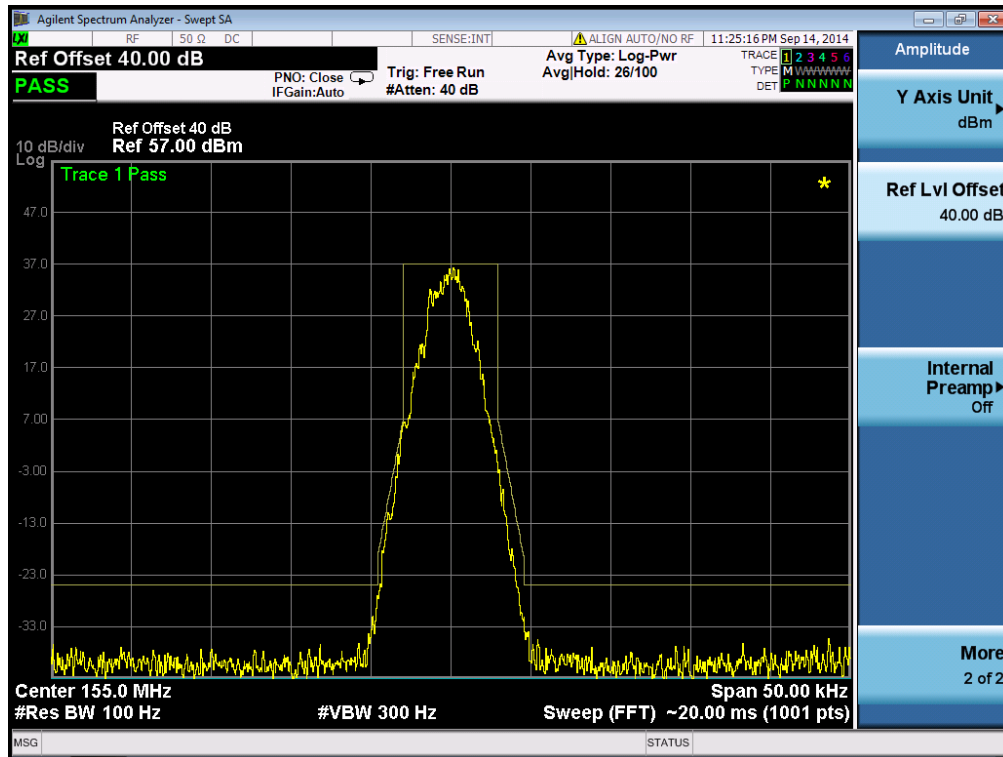

The Worst Emission Mask E for 6.25 KHz channel Separation (0.5W)-(VHF)

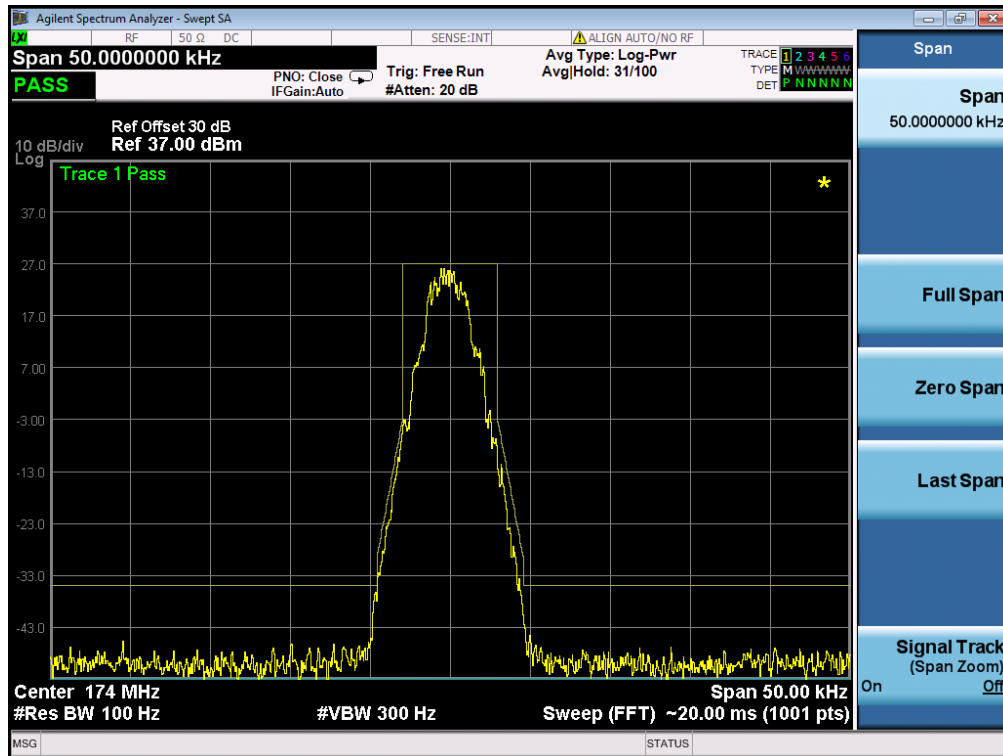

9. MODULATION CHARACTERISTICS

9.1 PROVISIONS APPLICABLE

According to CFR 47 section 2.1047(a), for Voice Modulation Communication Equipment, the frequency response of the audio modulation circuit over a range of 100 to 5000Hz shall be measured.

9.2 MEASUREMENT METHOD

9.2.1 Modulation Limit

- (1). Configure the EUT as shown in figure 1, adjust the audio input for 60% of rated system deviation at 1KHz using this level as a reference (0dB) and vary the input level from –20 to +20dB. Record the frequency deviation obtained as a function of the input level.
- (2). Repeat step 1 with input frequency changing to 300, 1000, 1500 and 3000Hz in sequence.

9.2.2 Audio Frequency Response

- (1). Configure the EUT as shown in figure 1.
- (2). Adjust the audio input for 20% of rated system deviation at 1 KHz using this level as a reference (0 dB).
- (3). Vary the Audio frequency from 100 Hz to 10 KHz and record the frequency deviation.
- (4). Audio Frequency Response = $20\log_{10} (\text{Deviation of test frequency} / \text{Deviation of 1 KHz reference})$.

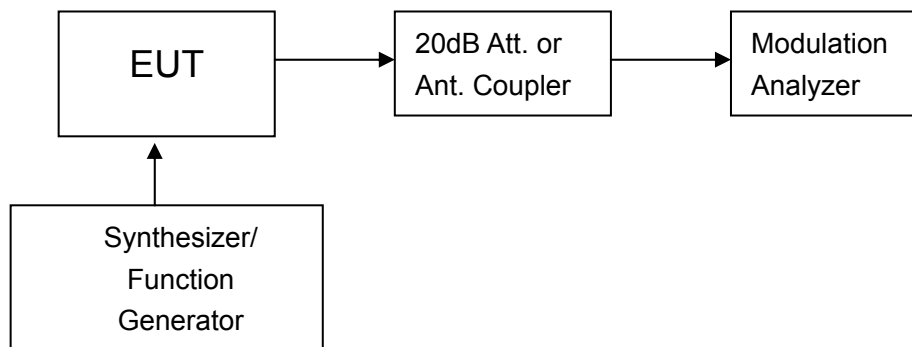


Figure 1: Modulation characteristic measurement configuration

9.3 MEASUREMENT INSTRUMENTS

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	Cal. Date	Cal. Due
MODULATION ANALYZER	HP	8920B	3104A03367	07/16/2014	07/15/2015
SIGNAL GENERATOR	R&S	SMT02	A0304261	05/26/2014	05/26/2015
ATTENUATOR	WEINSCHEL CORP	58-30-33	ML030	07/16/2014	07/15/2015

NOTE: 8920B can generate audio modulation frequency.

9.4 MEASUREMENT RESULT


Analog:

TEST RESULT TS FOR H POWER LEVEL

(A). MODULATION LIMIT:

Middle Channel @ 12.5 KHz Channel Separations

Modulation Level (dB)	Peak Freq. Deviation At 300 Hz	Peak Freq. Deviation At 1000 Hz	Peak Freq. Deviation At 1500 Hz	Peak Freq. Deviation At 3000 Hz
-20	-20	0.23	0.82	0.88
-15	-15	0.35	0.94	0.97
-10	-10	0.47	1.27	1.29
-5	-5	0.52	1.34	1.43
0	0	0.67	1.5	1.52
+5	5	0.72	1.63	1.74
+10	10	0.86	1.75	1.79
+15	15	0.98	1.65	1.73
+20	20	0.86	1.58	1.67

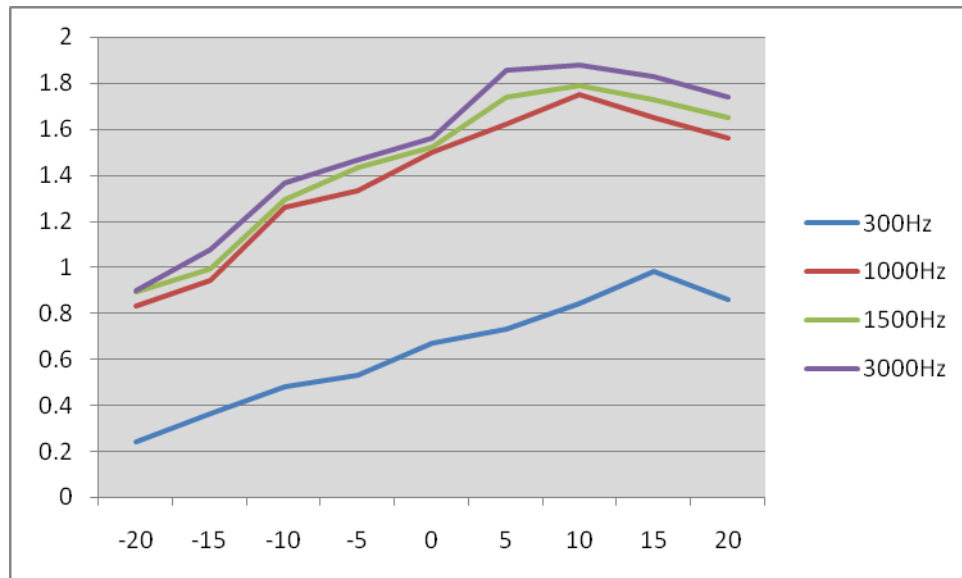


Note: All the modes had been tested, but only the worst data recorded in the report.

(B). AUDIO FREQUENCY RESPONSE:

Middle Channel @ 12.5 KHz Channel Separations

Frequency (Hz)	Deviation (KHz)	Audio Frequency Response(dB)
100	--	--
200	--	--
300	0.14	-11.70
400	0.17	-8.87
500	0.23	-7.13
600	0.27	-5.35
700	0.29	-4.73
800	0.36	-2.85
900	0.42	-1.72
1000	0.50	0.00
1200	0.55	0.83
1400	0.65	2.28
1600	0.75	3.52
1800	0.86	4.71
2000	0.94	5.48
2400	1.22	7.75
2500	1.44	9.19
2800	1.66	10.42
3000	1.75	10.88
3200	1.71	10.68
3600	1.56	9.88
4000	1.05	6.44
4500	0.84	4.51
5000	0.75	3.41
5500	0.46	-0.72
6000	0.14	-11.06
6500	0.06	-18.42
7000	0.04	-21.94
7500	0.02	-27.96
9000	--	--
10000	--	--
14000	--	--
18000	--	--
20000	--	--
30000	--	--

Frequency Response of Middle Channel (VHF)

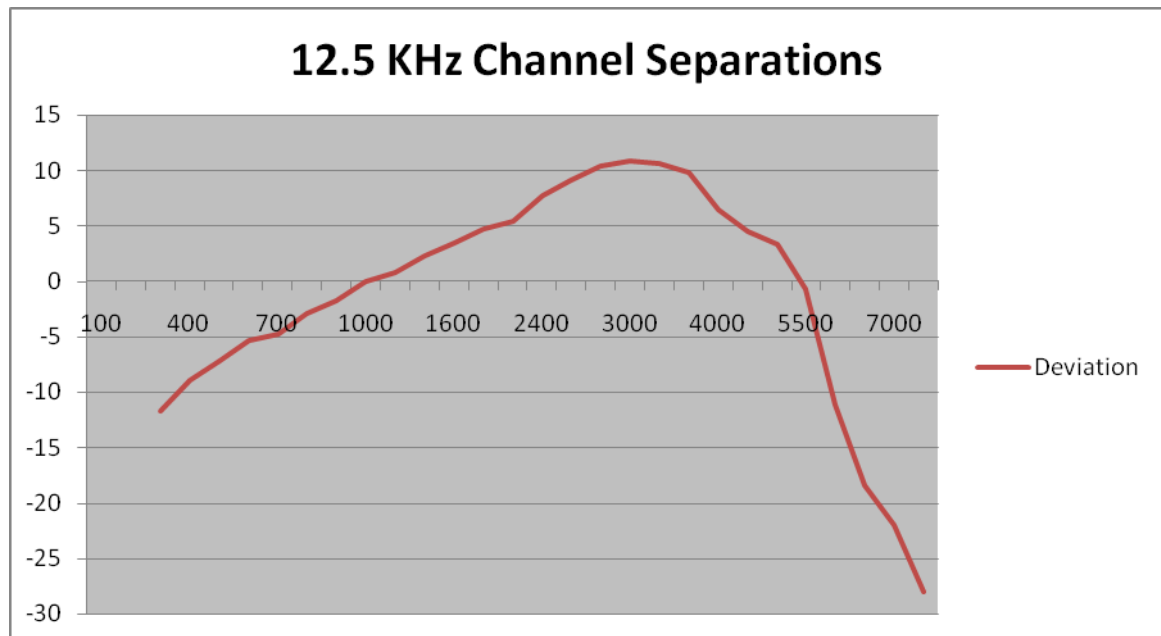

Note: All the modes had been tested, but only the worst data recorded in the report.


Digital:

TEST RESULT TS FOR H POWER LEVEL

(A). MODULATION LIMIT:

High Channel @ 6.25 KHz Channel Separations

Modulation Level (dB)	Peak Freq. Deviation At 300 Hz	Peak Freq. Deviation At 1000 Hz	Peak Freq. Deviation At 1500 Hz	Peak Freq. Deviation At 3000 Hz
-20	-20	0.22	0.83	0.87
-15	-15	0.34	0.94	0.96
-10	-10	0.46	1.27	1.28
-5	-5	0.54	1.34	1.43
0	0	0.67	1.5	1.52
+5	5	0.73	1.63	1.74
+10	10	0.87	1.76	1.78
+15	15	0.97	1.65	1.74
+20	20	0.88	1.59	1.68

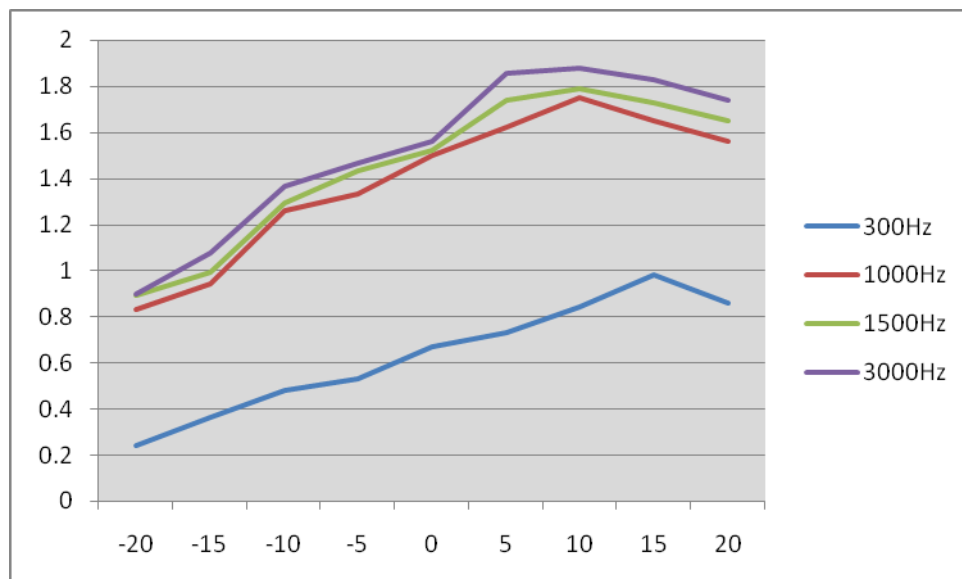


Note: All the modes had been tested, but only the worst data recorded in the report.

(B). AUDIO FREQUENCY RESPONSE:

High Channel @ 6.25 KHz Channel Separations

Frequency (Hz)	Deviation (KHz)	Audio Frequency Response(dB)
100	--	--
200	--	--
300	0.06	-5.55
400	0.07	-4.44
500	0.12	-3.57
600	0.13	-2.68
700	0.15	-2.37
800	0.19	-1.43
900	0.21	-0.86
1000	0.25	0.00
1200	0.28	0.42
1400	0.32	1.14
1600	0.38	1.76
1800	0.43	2.36
2000	0.47	2.74
2400	0.61	3.88
2500	0.72	4.60
2800	0.83	5.21
3000	0.88	5.44
3200	0.86	5.34
3600	0.78	4.94
4000	0.53	3.22
4500	0.42	2.26
5000	0.38	1.71
5500	0.23	-0.36
6000	0.07	-5.53
6500	0.03	-9.21
7000	0.02	-10.97
7500	0.01	-13.58
9000	--	--
10000	--	--
14000	--	--
18000	--	--
20000	--	--
30000	--	--

Frequency Response of Middle Channel (VHF)

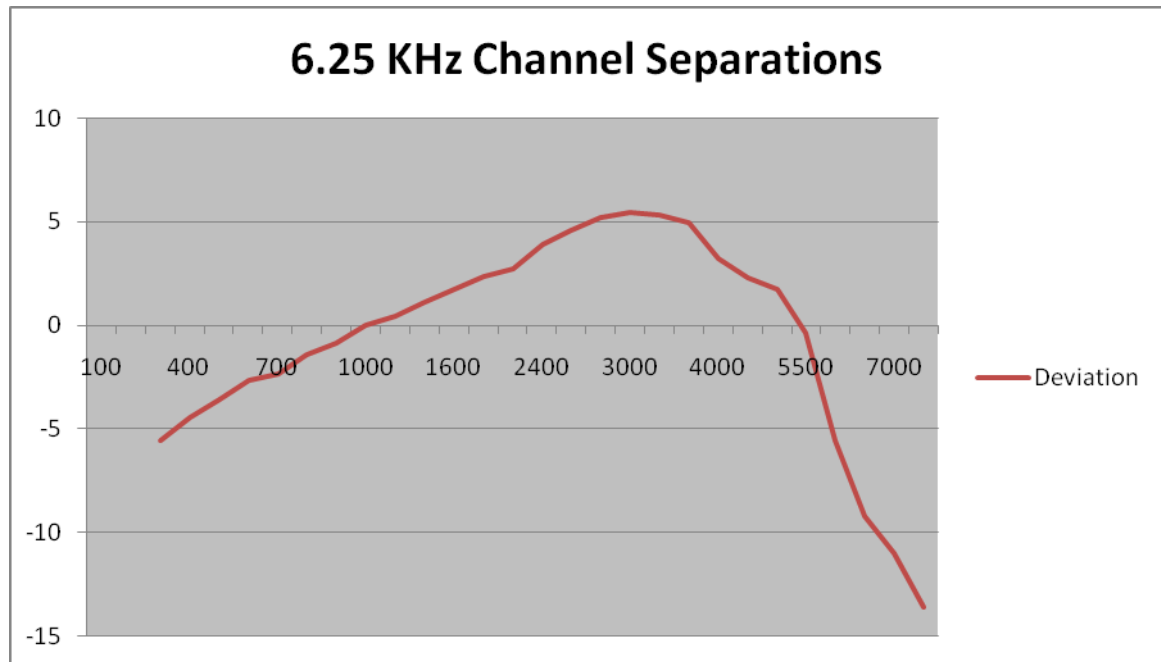

Note: All the modes had been tested, but only the worst data recorded in the report.

10. MAXIMUM TRANSMITTER POWER (CONDUCTED OUTPUT POWER)

10.1 PROVISIONS APPLICABLE

Per FCC §2.1046 and §90.205 AND RSS 119 Part 4.1: Maximum ERP is dependent upon the station's antenna HAAT and required service area.

10.2 TEST PROCEDURE


The RF output of Two-way Radio was conducted to a spectrum analyzer through an appropriate attenuator.

10.3 TEST INSTRUMENTS

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	Cal. Date	Cal. Due
SPECTRUM ANALYZER	AGILENT	E4440A	US44300399	07/17/2014	07/15/2015
Signal Generator	R&S	SMT02	A0304261	05/26/2014	05/26/2015
Attenuator	Weinschel Corp	58-30-33	ML030	07/17/2014	07/15/2015



10.4 TEST CONFIGURATION

Conducted Output Power:


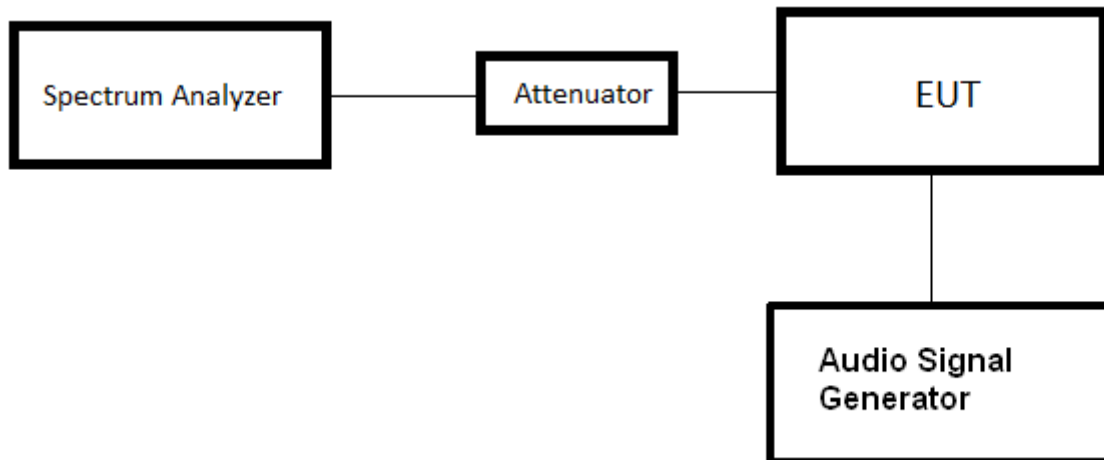


Effective Radiated Power measurement

Below 1GHz

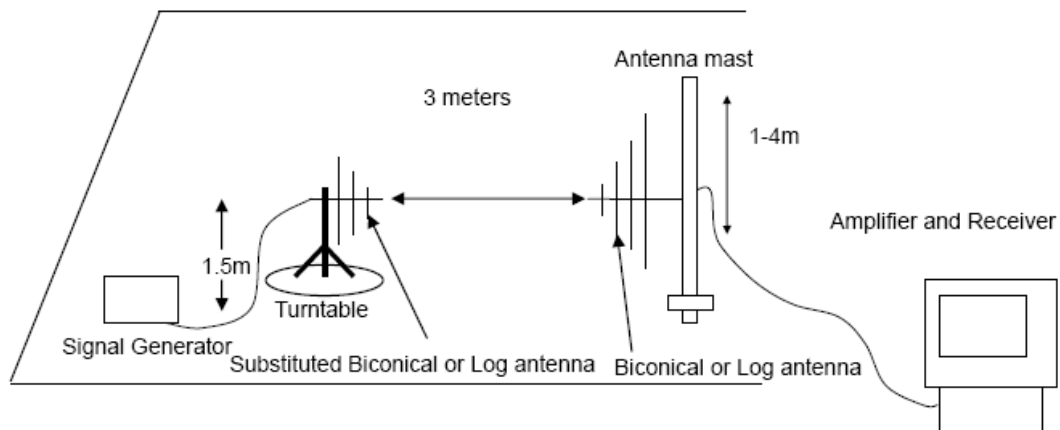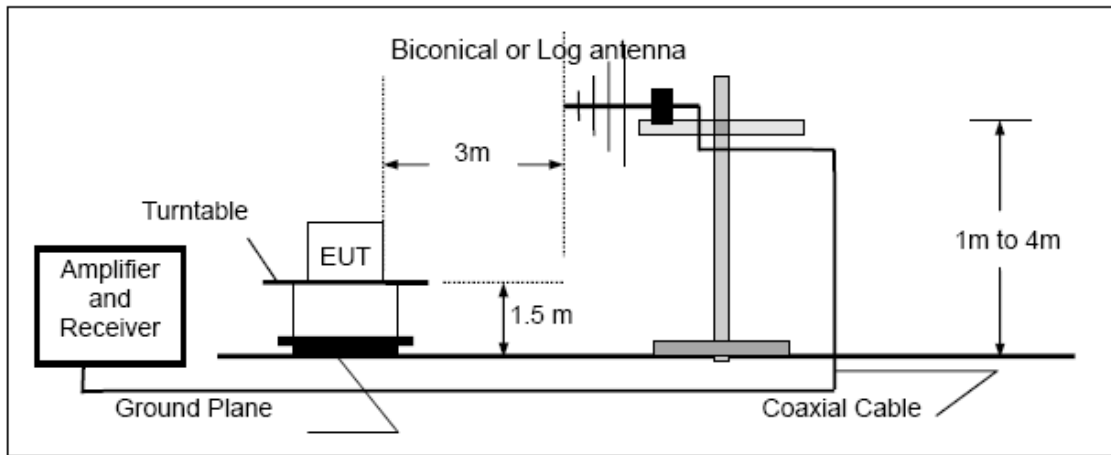

Above 1GHz

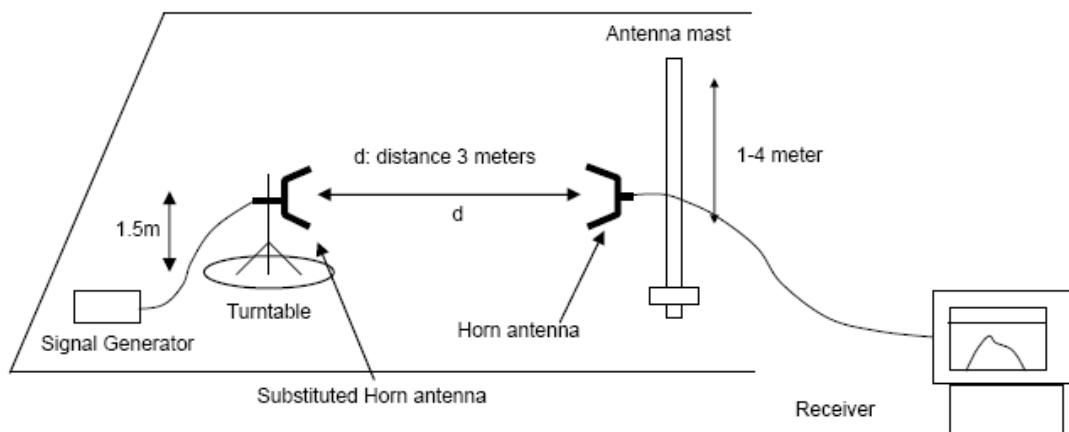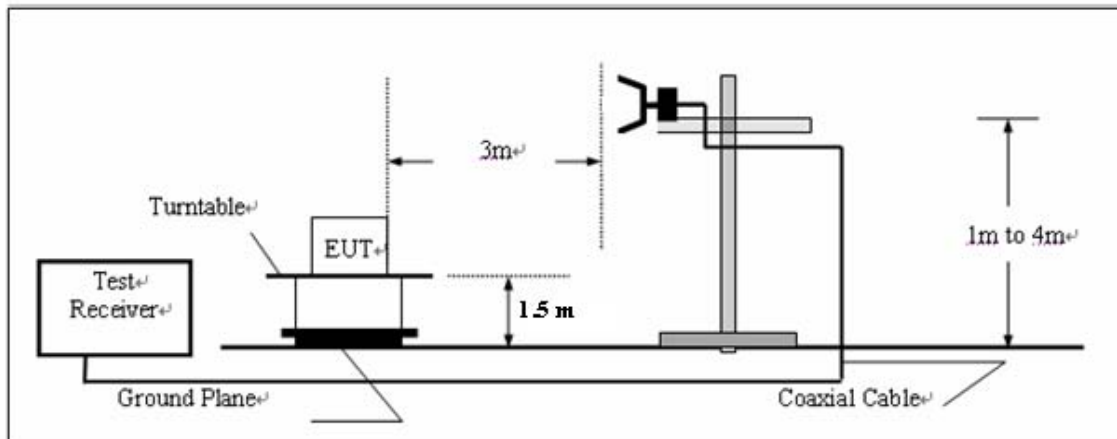

10.5 TEST RESULT

The maximum Conducted Power (CP) is

5 W/0.5 W for 12.5 KHz Channel Separation

5W/0.5 W for 6.25 KHz Channel Separation

Calculation Formula: $CP = R + A + L$

* Note:

CP: The final Conducted Power

R : The reading value from spectrum analyzer

A : The attenuation value of the used attenuator

L : The loss of all connection cables

Analog:

Conducted Power Measurement Results		
Channel Separation	Channel	Measurement Result (dBm)
		For 36.99dBm(5W)
12.5 KHz	Bottom(400.025MHz)	36.85
	Middle(440.025MHz)	36.92
	Top (479.975MHz)	36.87
	Bottom(136.025MHz)	36.84
	Middle(155.000MHz)	36.90
	Top (173.975MHz)	36.86
	Channel	Measurement Result (dBm)
	For 26.99dBm(0.5W)	
	Bottom(400.025MHz)	26.84
	Middle(440.025MHz)	26.90
	Top (479.975MHz)	26.86
	Bottom(136.025MHz)	26.83
	Middle(155.000MHz)	26.91
	Top (173.975MHz)	26.85

Radiated Power Measurement Results		
Channel Separation	Channel	Measurement Result (dBm)
		For 36.99dBm(5W)
12.5 KHz	Bottom(400.025MHz)	36.78
	Middle(440.025MHz)	36.89
	Top (479.975MHz)	36.80
	Bottom(136.025MHz)	36.79
	Middle(155.000MHz)	36.89
	Top (173.975MHz)	36.81
	Channel	Measurement Result (dBm)
	For 26.99dBm(0.5W)	
	Bottom(400.025MHz)	26.81
	Middle(440.025MHz)	26.86
	Top (479.975MHz)	26.81
	Bottom(136.025MHz)	26.76
	Middle(155.000MHz)	26.86
	Top (173.975MHz)	26.81

Digital:


Conducted Power Measurement Results		
Channel Separation	Channel	Measurement Result (dBm)
		For 36.99dBm(5W)
6.25 KHz	Bottom(400.025MHz)	36.91
	Middle(440.025MHz)	36.93
	Top (479.975MHz)	36.92
	Bottom(136.025MHz)	36.81
	Middle(155.000MHz)	36.92
	Top (173.975MHz)	36.84
	Channel	Measurement Result (dBm)
	For 26.99dBm(0.5W)	
	Bottom(400.025MHz)	26.87
	Middle(440.025MHz)	26.90
	Top (479.975MHz)	26.81
	Bottom(136.025MHz)	26.82
	Middle(155.000MHz)	26.89
	Top (173.975MHz)	26.84

Radiated Power Measurement Results		
Channel Separation	Channel	Measurement Result (dBm)
		For 36.99dBm(5W)
6.25 KHz	Bottom(400.025MHz)	36.89
	Middle(440.025MHz)	36.85
	Top (479.975MHz)	36.86
	Bottom(136.025MHz)	36.79
	Middle(155.000MHz)	36.79
	Top (173.975MHz)	36.85
	Channel	Measurement Result (dBm)
	For 26.99dBm(0.5W)	
	Bottom(400.025MHz)	26.86
	Middle(440.025MHz)	26.89
	Top (479.975MHz)	26.79
	Bottom(136.025MHz)	26.76
	Middle(155.000MHz)	26.81
	Top (173.975MHz)	26.79


10.6 CONDUCT SPURIOUS PLOT

Analog:

Conducted Spurious Emission (worst) @ 400.025MHz With 12.5 KHz Channel Separation-5W
30MHz-1GHz

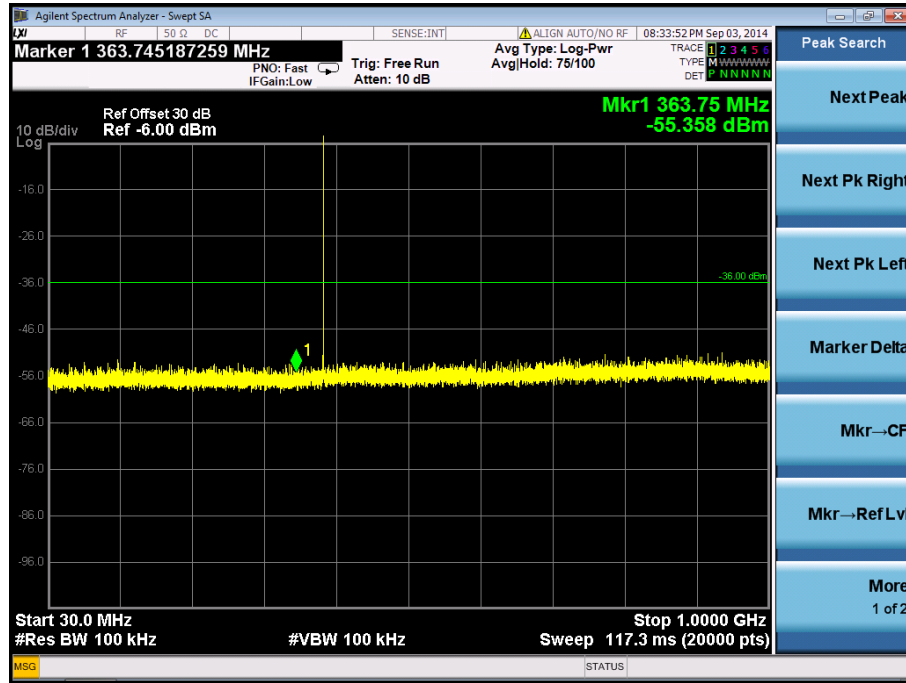


Conduct Spurious Emission (worst) @ 400.025MHz With 12.5 KHz Channel Separation-5W
1GHz-12.75GHz

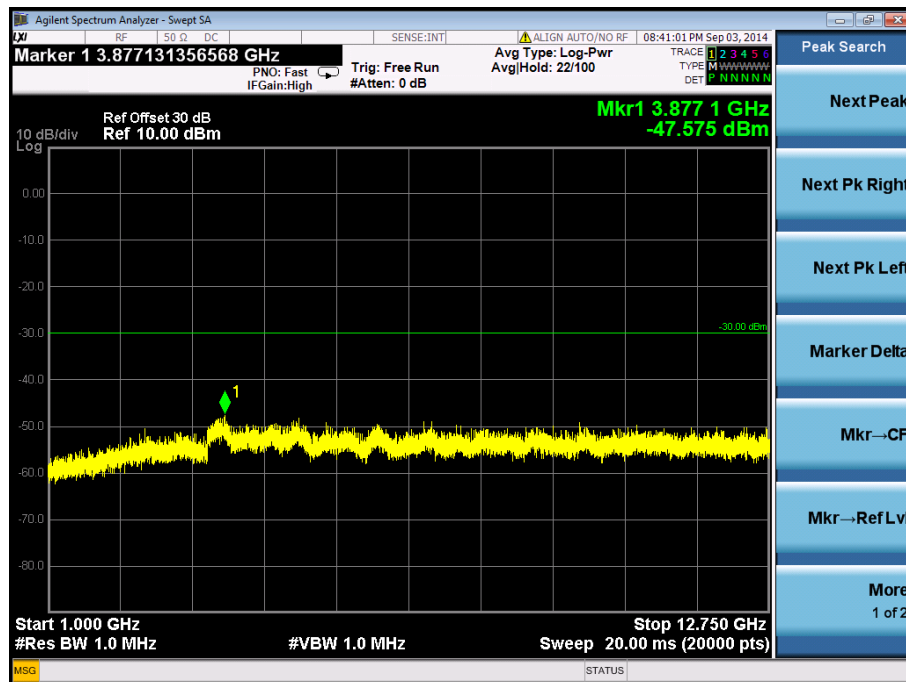


Digital:

Conducted Spurious Emission (worst) @ 400.025MHz With 6.25 KHz Channel Separation-5W
30MHz-1GHz

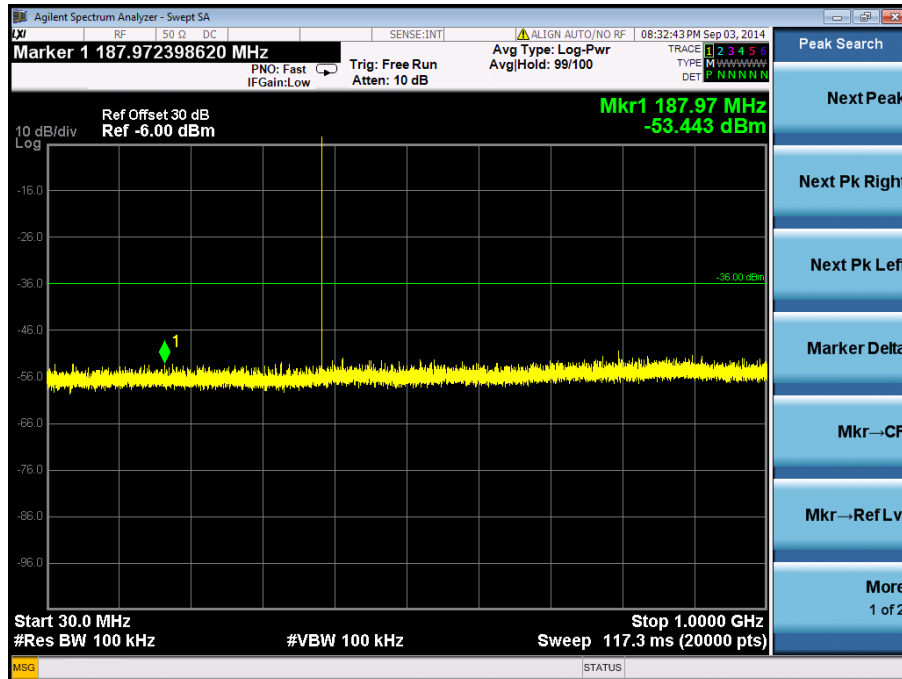

Conduct Spurious Emission (worst) @ 400.025MHz With 6.25 KHz Channel Separation-5W
1GHz-12.75GHz

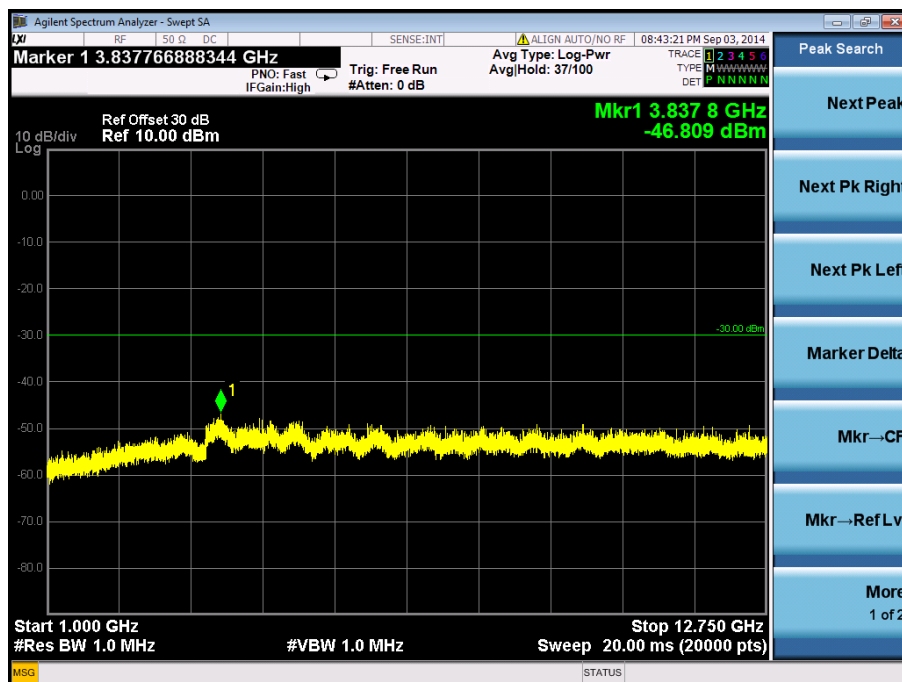

11. TRANSMITTER FREQUENCY BEHAVIOR

11.1 PROVISIONS APPLICABLE

Section 90.214

Time intervals ^{1, 2}	Maximum frequency difference ³	All equipment	
		150 to 174 MHz	421 to 512 MHz
Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels			
t ₁ ⁴	± 25.0 kHz	5.0 ms	10.0 ms
t ₂	± 12.5 kHz	20.0 ms	25.0 ms
t ₃ ⁴	± 25.0 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels			
t ₁ ⁴	± 12.5 kHz	5.0 ms	10.0 ms
t ₂	± 6.25 kHz	20.0 ms	25.0 ms
t ₃ ⁴	± 12.5 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels			
t ₁ ⁴	± 6.25 kHz	5.0 ms	10.0 ms
t ₂	± 3.125 kHz	20.0 ms	25.0 ms
t ₃ ⁴	± 6.25 kHz	5.0 ms	10.0 ms

¹ t_{on} is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.

t_1 is the time period immediately following t_{on} .

t_2 is the time period immediately following t_1 .

t_3 is the time period from the instant when the transmitter is turned off until t_{off} .

t_{off} is the instant when the 1 kHz test signal starts to rise.

² During the time from the end of t_2 to the beginning of t_3 , the frequency difference must not exceed the limits specified in § 90.213.

³ Difference between the actual transmitter frequency and the assigned transmitter frequency.

⁴ If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

11.2 TEST METHOD

TIA/EIA-603 2.2.19

11.3 TEST INSTRUMENTS

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	Cal. Date	Cal. Due
SIGNAL GENERATOR	AGILENT	E4412B	LR114196	05/28/2014	05/27/2015
STORAGE OSCILLOSCOPE	TEKTRONIX	TDS3052	B017447	07/16/2014	07/15/2015
VOLTAGE PROBE	SCHWARZBECK	TK 9420	N/A	07/16/2014	07/15/2015

11.4 DESCRIBE LIMIT LINE OF TRANSMITTER FREQUENCY BEHAVIOR


ton: The switch-on instant t_{on} of a transmitter is defined by the condition when the output power, measured at the antenna terminal, exceeds 0,1 % of the full output power (-30 dBc).

t1: period of time starting at t_{on} and finishing according to above 11.1

t2: period of time starting at the end of t_1 and finishing according to above 11.1


toff: switch-off instant defined by the condition when the output power falls below 0,1 % of the full output power (-30 dBc).

t3: period of time that finishing at t_{off} and starting according to above 11.1

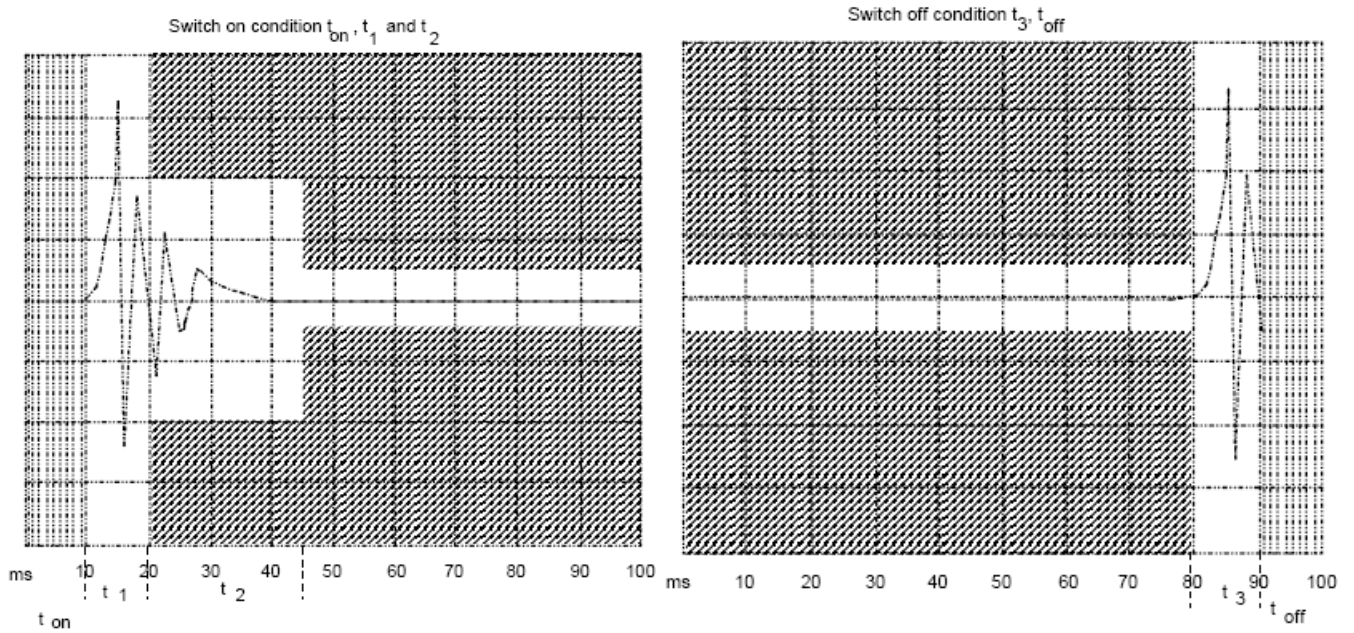


11.5 MEASURE RESULT

Transmitter Frequency Behaviour @ 12.5 KHz Channel Separation--Off to On

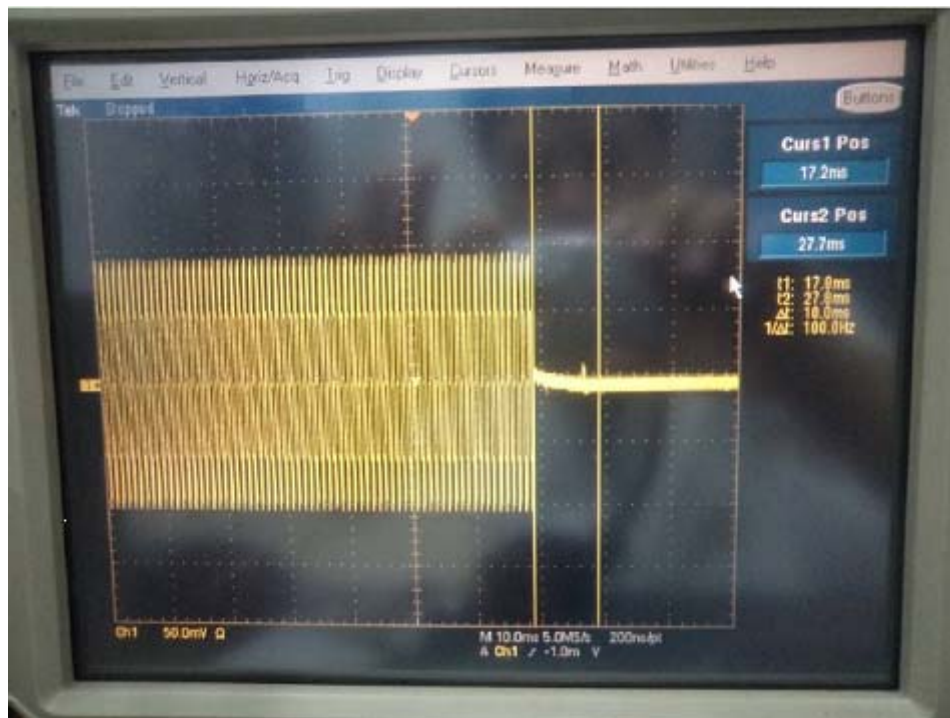

Transmitter Frequency Behaviour @ 12.5 KHz Channel Separation--On to Off

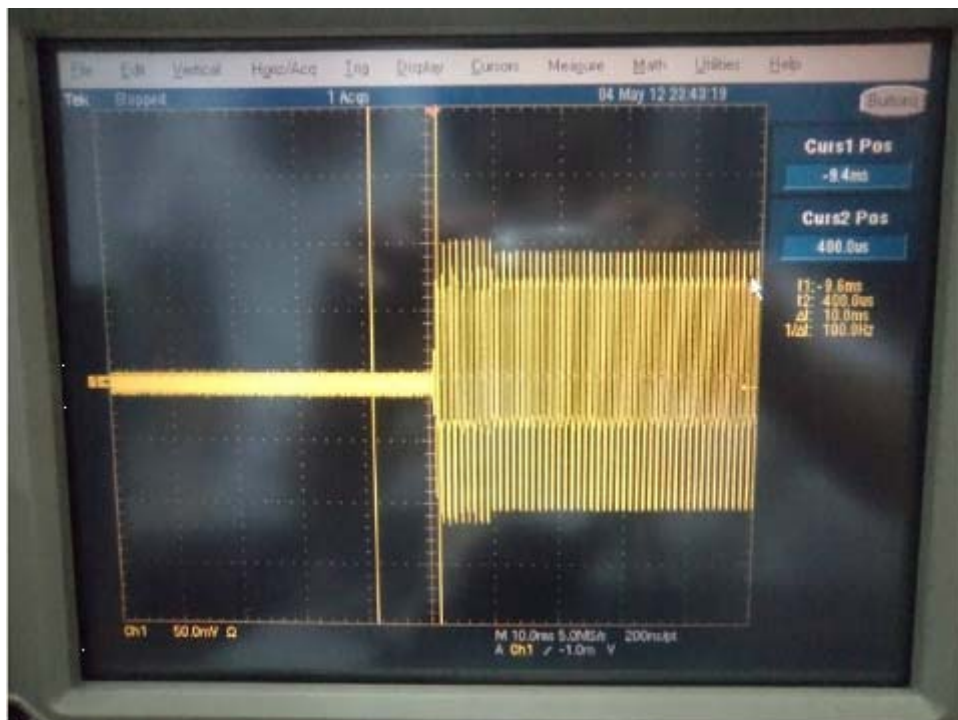

12. RADIATED EMISSION ON RECEIVING MODE

12.1 PROVISIONS APPLICABLE

FCC Part 15 Subpart B Section 15.109

RSS-Gen Subpart B Section RSS-Gen.6.1

12.2 TEST METHOD


ANSI C 63.4: 2003

12.3 TEST INSTRUMENTS

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	Cal. Date	Cal. Due
SPECTRUM ANALYZER	AGILENT	E4440A	US44300399	07/16/2014	07/15/2015
HORN ANT.	EM	EM-AH-10180	100150	04/20/2014	04/19/2015
BROADBAND ANT.	A.H.	SAS-521-4	A0304224	06/06/2014	06/05/2015
AMPLIFIER	EM	EM30180	0607030	07/16/2014	07/15/2015
POSITIONING CONTROLLER	MF	MF-7802	MF780208147	--	--
RF CABLE	SUIRONG	30MHZ-18GHZ	N/A	07/15/2014	07/15/2015


12.4 MEASURE RESULT (MEASURED AT 3M USING FCC PART15 B LIMITS)

RADIATED EMISSION TEST RESULTS – HORIZONTAL (BELOW 1G)

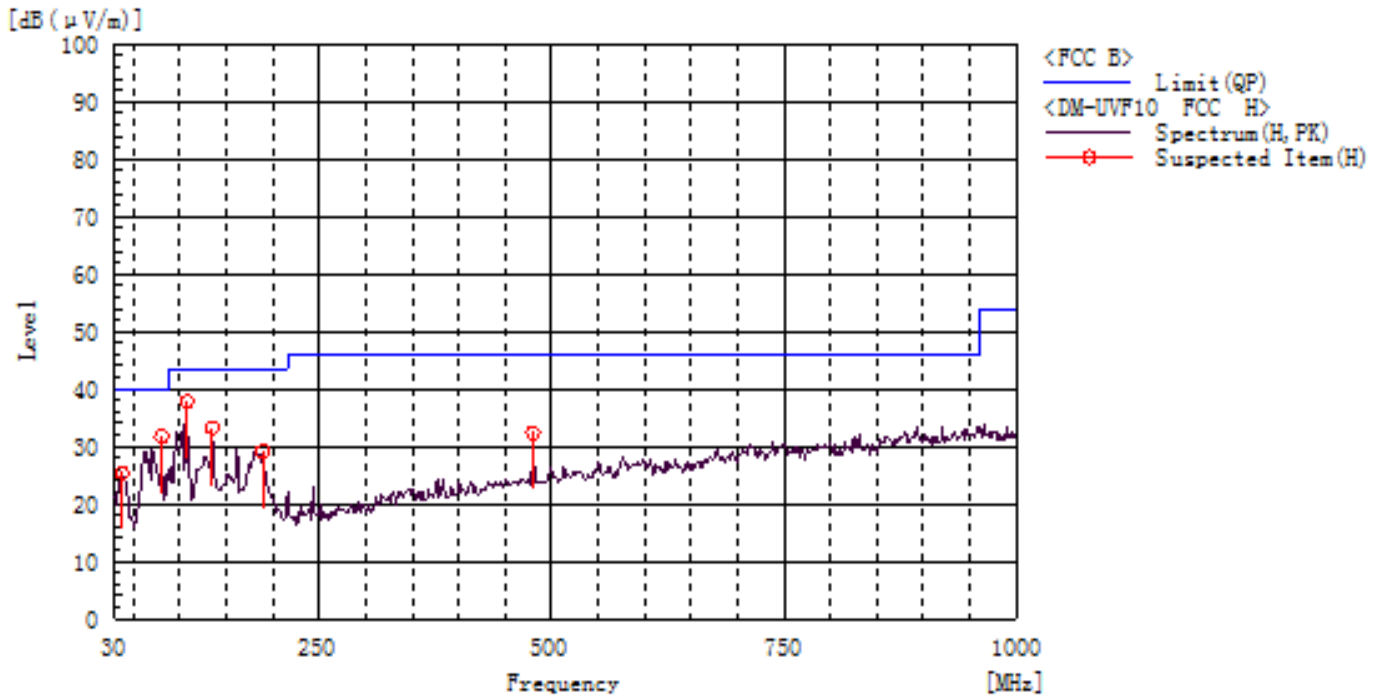


Frequency MHz	Polarization	Reading dB(μV)	Factor dB (1/m)	Level dB(μV/m)	Limit dB(μV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
37.760	H	4.2	21.2	25.4	40.0	14.6	Pass	200.0	58.9
80.440	H	22.0	9.8	31.8	40.0	8.2	Pass	200.0	15.9
107.600	H	26.5	11.3	37.8	43.5	5.7	Pass	200.0	38.0
134.760	H	18.7	14.6	33.3	43.5	10.2	Pass	200.0	15.9
189.080	H	16.2	12.9	29.1	43.5	14.4	Pass	200.0	42.3
480.080	H	12.1	20.2	32.3	46.0	13.7	Pass	200.0	54.4

RADIATED EMISSION TEST RESULTS – VERTICAL (BELOW 1G)

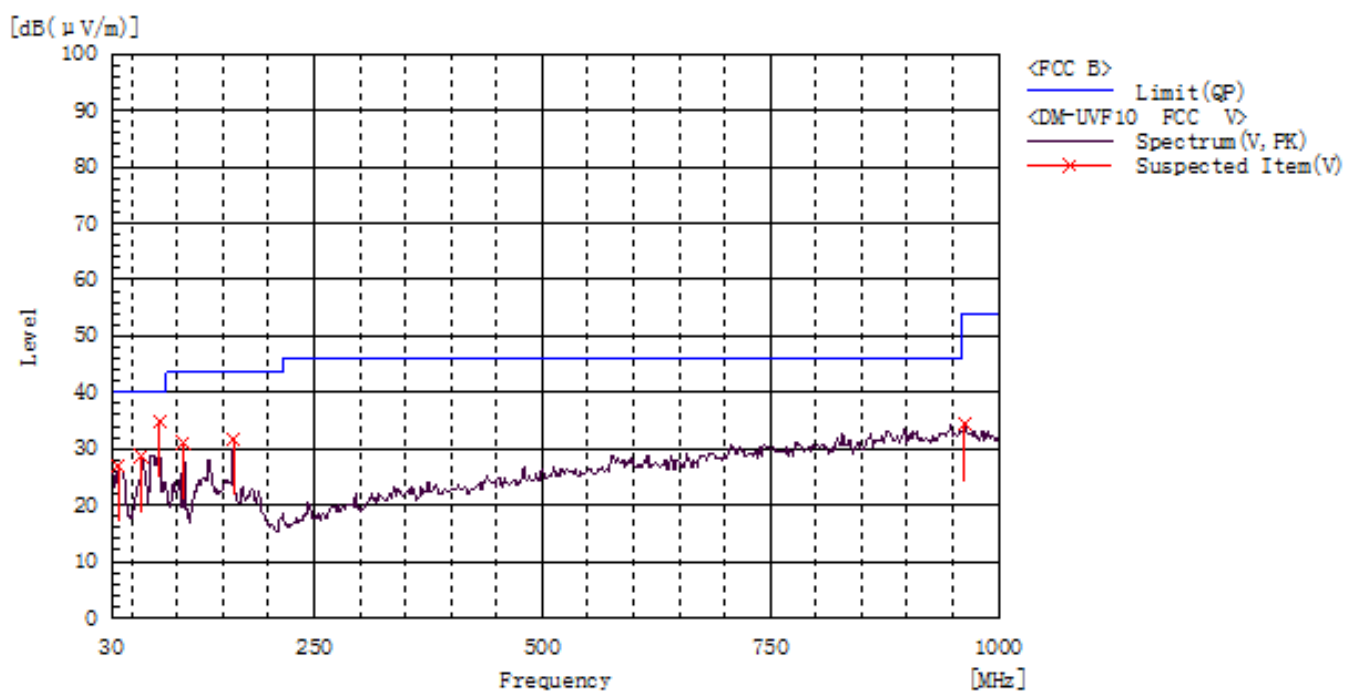


Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m)	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
35.820	V	8.0	18.9	26.9	40.0	13.1	Pass	200.0	283.5
61.040	V	16.6	12.0	28.6	40.0	11.4	Pass	200.0	206.3
80.440	V	25.1	9.8	34.9	40.0	5.1	Pass	200.0	206.3
107.600	V	19.7	11.3	31.0	43.5	12.5	Pass	200.0	345.1
161.920	V	16.6	15.0	31.6	43.5	11.9	Pass	200.0	195.3
963.140	V	5.6	28.7	34.3	54.0	19.7	Pass	200.0	174.3

RADIATED EMISSION TEST RESULTS – HORIZONTAL (ABOVE 1G)

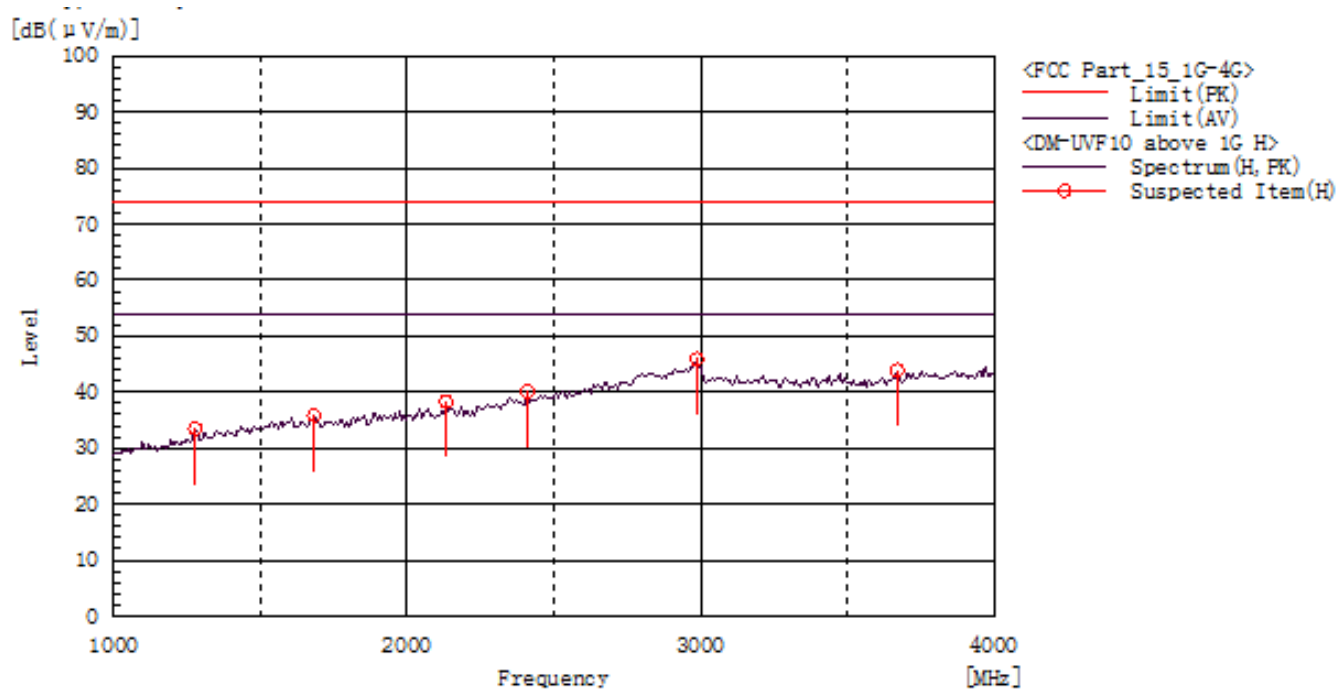

Frequency MHz	Polarization	Reading dB(μV)	Factor dB (1/m)	Level dB(μV/m)	Limit dB(μV/m) AV	Margin dB	Pass/Fail	Height cm	Angle deg
2987.500	H	42.4	3.5	45.9	54.0	8.1	Pass	200.0	212.9
3670.000	H	39.1	4.8	43.9	54.0	10.1	Pass	200.0	212.9
2132.500	H	40.6	-2.2	38.4	54.0	15.6	Pass	100.0	180.9
2410.000	H	40.5	-0.4	40.1	54.0	13.9	Pass	100.0	108.7
1682.500	H	39.2	-3.4	35.8	54.0	18.2	Pass	100.0	217.3
1277.500	H	39.1	-5.6	33.5	54.0	20.5	Pass	200.0	141.0

RADIATED EMISSION TEST RESULTS – VERTICAL (ABOVE 1G)

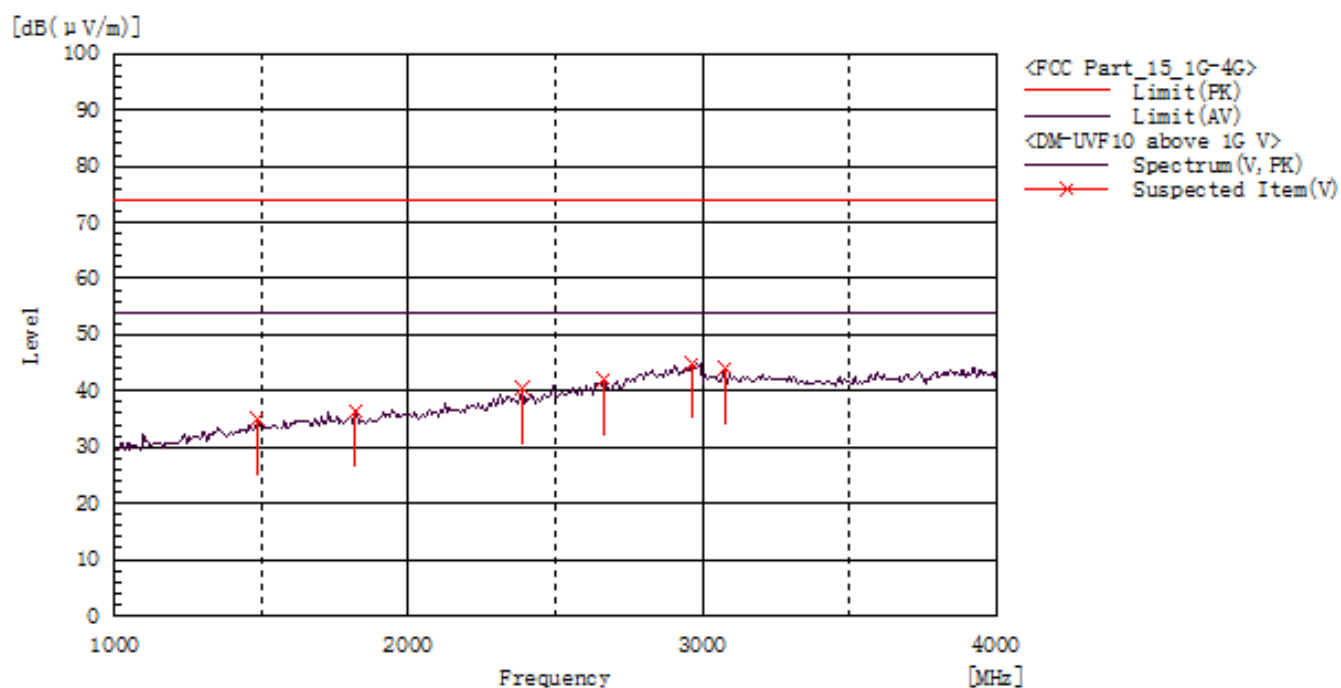

Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m)	Limit dB(uV/m) PK	Margin dB PK	Pass/Fail	Height cm	Angle deg
1817.500	V	39.6	-3.2	36.4	54.0	17.6	Pass	200.0	289.8
1487.500	V	39.1	-4.1	35.0	54.0	19.0	Pass	100.0	151.7
2387.500	V	40.9	-0.5	40.4	54.0	13.6	Pass	100.0	333.1
2665.000	V	40.7	1.4	42.1	54.0	11.9	Pass	100.0	115.9
2965.000	V	41.8	3.2	45.0	54.0	9.0	Pass	200.0	253.4
3077.500	V	40.2	3.7	43.9	54.0	10.1	Pass	200.0	71.9

13. AUDIO LOW PASS FILTER RESPONSE

13.1 LIMITS

2.1047(a): Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.

90.242(b)(8): Recommended audio filter attenuation characteristics are given below:

Audio band	Minimum Attenuation Rel. to 1 KHz Attenuation
3 –20 KHz 20 – 30 KHz	$60 \log_{10}(f/3)$ dB where f is in KHz 50dB

13.2. METHOD OF MEASUREMENTS

The rated audio input signal was applied to the input of the audio low-pass filter (or of all modulation stages) using an audio oscillator, this input signal level and its corresponding output signal were then measured and recorded using the FFT Digital Spectrum Analyzer. Tests were repeated at different audio signal frequencies from 0 to 50 KHz.


13.3 TEST DATA

Analog:

12.5 KHZ CHANNEL SPACING, F3E, FREQUENCY OF ALL MODULATION STATES (TEST RESULT FOR VHF)-5W

Frequency	Audio In	Audio out	Attenuation	Attenuation	Recommended Attenuation
(KHz)	(dBV)	(dBV)	(Out_In)	Rel.to 3 KHz	(dB)
			dB	(dB)	
0.1	-76.17	-31.21	46.38	-36.53	
0.2	-76.17	-17.38	58.25	-25.63	
0.4	-76.17	-6.29	71.65	-12.83	
0.6	-76.17	0.41	74.25	-6.43	
0.8	-76.17	4.17	78.95	-2.93	
1.0	-76.17	7.18	83.65	-0.03	
1.5	-76.17	8.27	84.85	2.16	
2.0	-76.17	8.99	85.35	1.57	
2.5	-76.17	7.52	83.85	0.67	
3.0	-76.17	6.27	82.55	-1.82	0
3.5	-76.17	2.63	78.45	-4.93	-4
4.0	-76.17	-2.3	74.65	-9.43	-7
4.5	-76.17	-9.21	68.25	-16.53	-12
5.0	-76.17	-15.17	60.65	-21.73	-15
6.0	-76.17	-21.23	54.15	-28.63	-18
7.0	-76.17	-31.61	46.25	-36.43	-22
8.0	-76.17	-39.22	37.95	-47.63	-26
9.0	-76.17	-61.95	15.15	-66.93	-28
10.0	-76.17	-61.95	15.15	-66.43	-31
12.0	-76.17	-61.95	15.15	-66.43	-37
14.0	-76.17	-61.95	15.15	-66.43	-40
16.0	-76.17	-61.95	15.15	-66.43	-44
18.0	-76.17	-61.95	15.15	-66.43	-47
20.0	-76.17	-61.95	15.15	-66.43	-49
25.0	-76.17	-61.95	15.15	-66.43	-49
30.0	-76.17	-61.95	15.15	-66.43	-49
35.0	-76.17	-61.95	15.15	-66.43	-49
40.0	-76.17	-61.95	15.15	-66.43	-49
45.0	-76.17	-61.95	15.15	-66.43	-49
50.0	-76.17	-61.95	15.15	-66.43	-49

Note: Due to the difficulty of measuring the Frequency Response of the internal low-pass filter, the Frequency Response of All Modulation States is performed to show the roll-off at 3 KHz in comparison with the recommended audio filter attenuation.

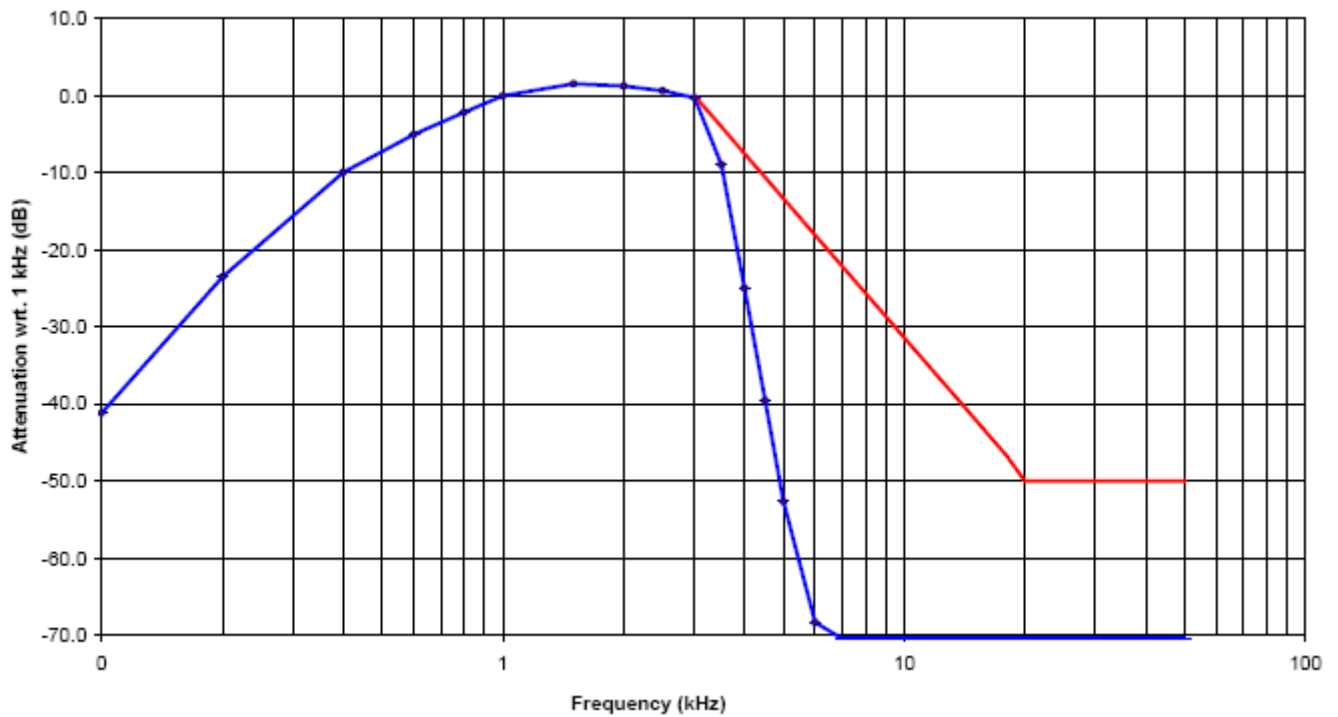


Digital:

6.25KHZ CHANNEL SPACING, F3E, FREQUENCY OF ALL MODULATION STATES (TEST RESULT FOR VHF)-5W

Frequency	Audio In	Audio out	Attenuation	Attenuation	Recommended Attenuation
(KHz)	(dBV)	(dBV)	(Out_In)	Rel.to 3 KHz	(dB)
			dB	(dB)	
0.1	-76.16	-31.22	46.39	-36.55	
0.2	-76.16	-17.37	58.26	-25.64	
0.4	-76.16	-6.28	71.67	-12.83	
0.6	-76.16	0.42	74.26	-6.43	
0.8	-76.16	4.16	78.96	-2.93	
1.0	-76.16	7.17	83.66	-0.03	
1.5	-76.16	8.26	84.86	2.16	
2.0	-76.16	8.98	85.36	1.57	
2.5	-76.16	7.51	83.86	0.67	
3.0	-76.16	6.26	82.56	-1.82	0
3.5	-76.16	2.64	78.46	-4.94	-4
4.0	-76.16	-2.31	74.66	-9.44	-7
4.5	-76.16	-9.22	68.26	-16.54	-12
5.0	-76.16	-15.16	60.66	-21.74	-15
6.0	-76.16	-21.22	54.16	-28.64	-18
7.0	-76.16	-31.62	46.26	-36.44	-22
8.0	-76.16	-39.22	37.96	-47.64	-26
9.0	-76.16	-61.95	15.16	-66.94	-28
10.0	-76.16	-61.94	15.16	-66.44	-31
12.0	-76.16	-61.94	15.16	-66.44	-37
14.0	-76.16	-61.94	15.16	-66.44	-40
16.0	-76.16	-61.94	15.16	-66.44	-44
18.0	-76.16	-61.94	15.16	-66.44	-47
20.0	-76.16	-61.94	15.16	-66.44	-49
25.0	-76.16	-61.94	15.16	-66.44	-49
30.0	-76.16	-61.94	15.16	-66.44	-49
35.0	-76.16	-61.94	15.16	-66.44	-49
40.0	-76.16	-61.94	15.16	-66.44	-49
45.0	-76.16	-61.94	15.16	-66.44	-49
50.0	-76.16	-61.94	15.16	-66.44	-49

Note: Due to the difficulty of measuring the Frequency Response of the internal low-pass filter, the Frequency Response of All Modulation States is performed to show the roll-off at 3 KHz in comparison with the recommended audio filter attenuation.

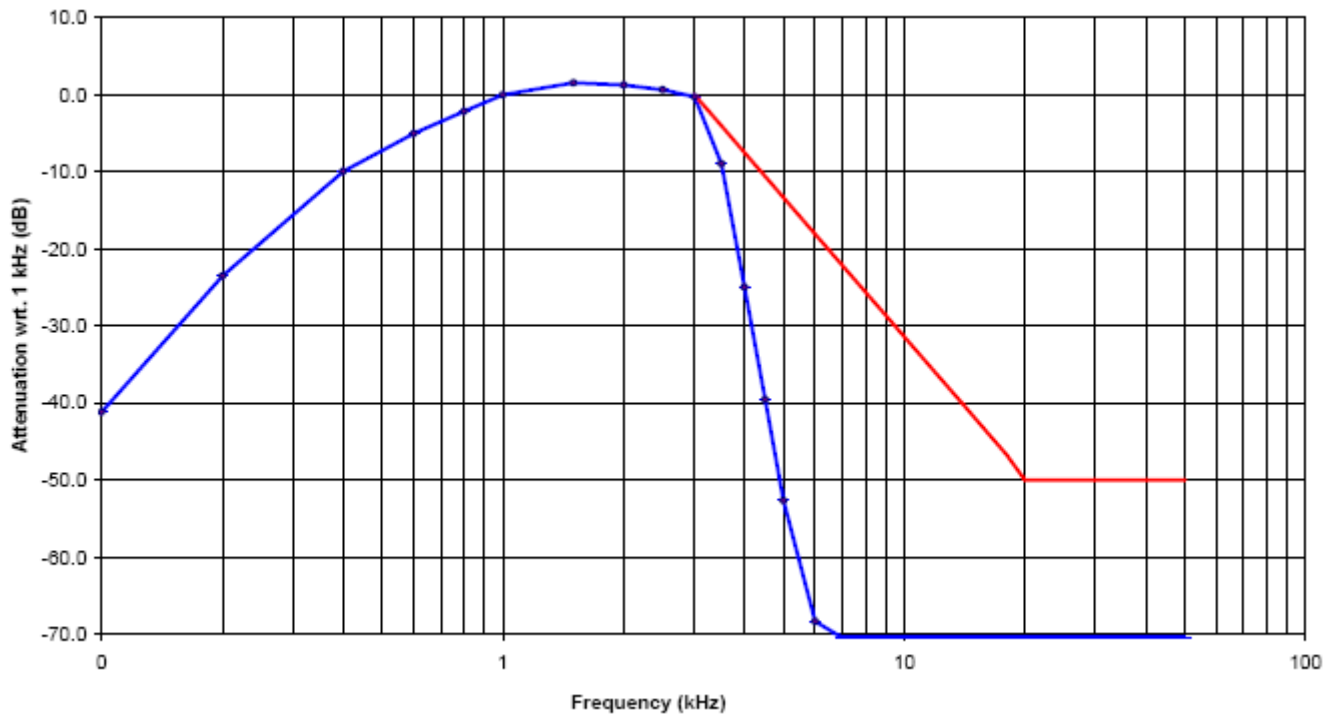


APPENDIX I: PHOTOGRAPHS OF SETUP

RADIATED EMISSION TEST SETUP



CONDUCTED EMISSION TEST SETUP

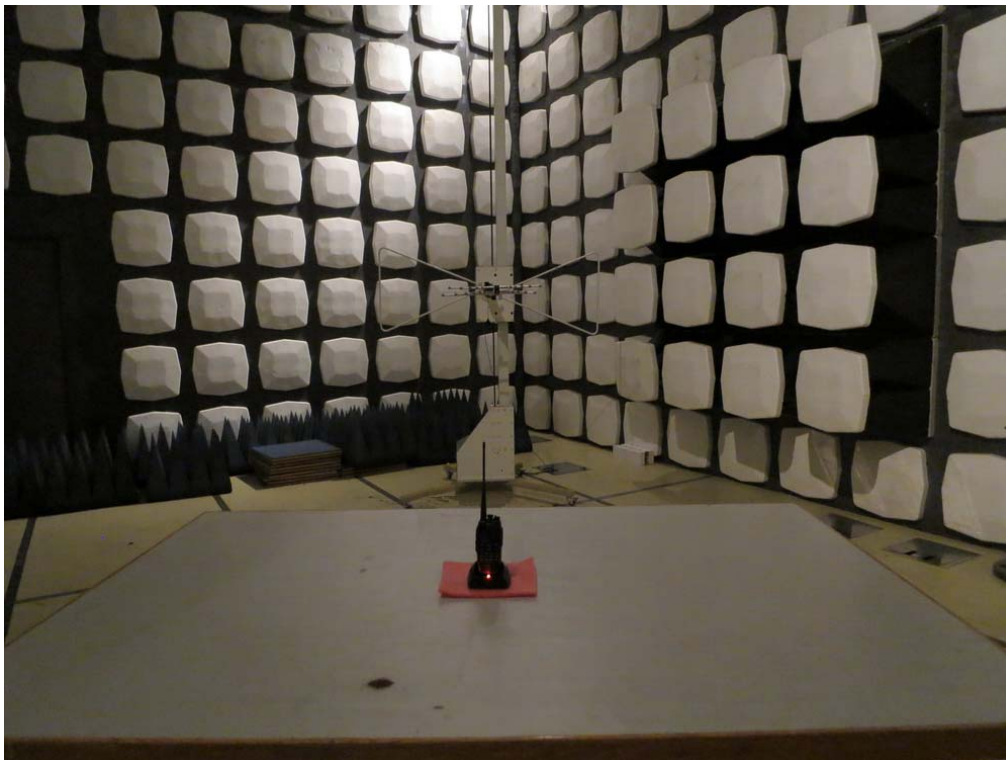

APPENDIX II: EXTERNAL VIEW OF EUT

TOTAL VIEW OF EUT



TOP VIEW OF EUT



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



BACK VIEW OF EUT



LEFT VIEW OF EUT



RIGHT VIEW OF EUT



OPEN VIEW-1 OF EUT




OPEN VIEW-2 OF EUT




INTERNAL VIEW-1 OF EUT




INTERNAL VIEW-1 OF EUT

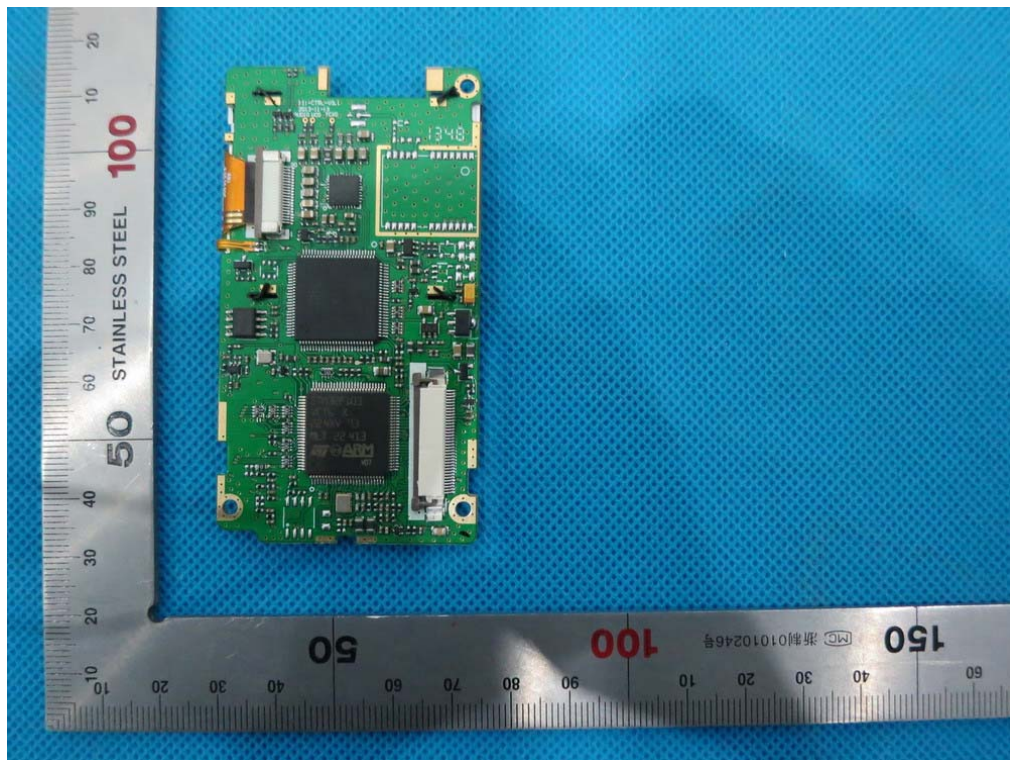

INTERNAL VIEW-3 OF EUT

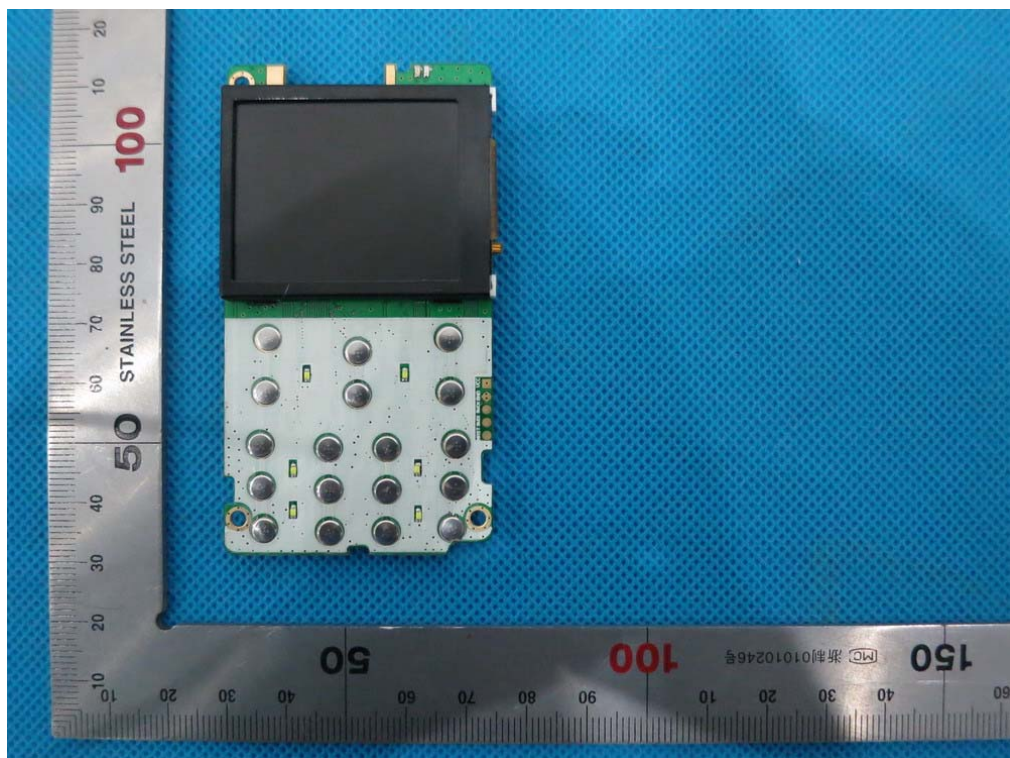


INTERNAL VIEW-4 OF EUT

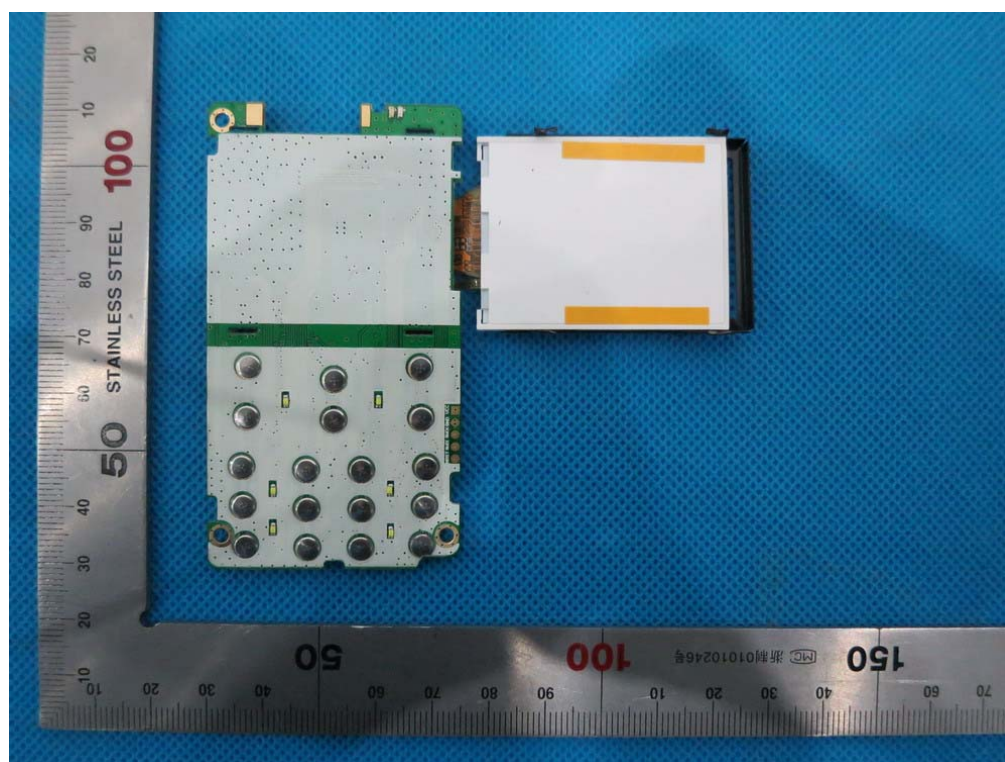


INTERNAL VIEW-5 OF EUT



INTERNAL VIEW-6 OF EUT

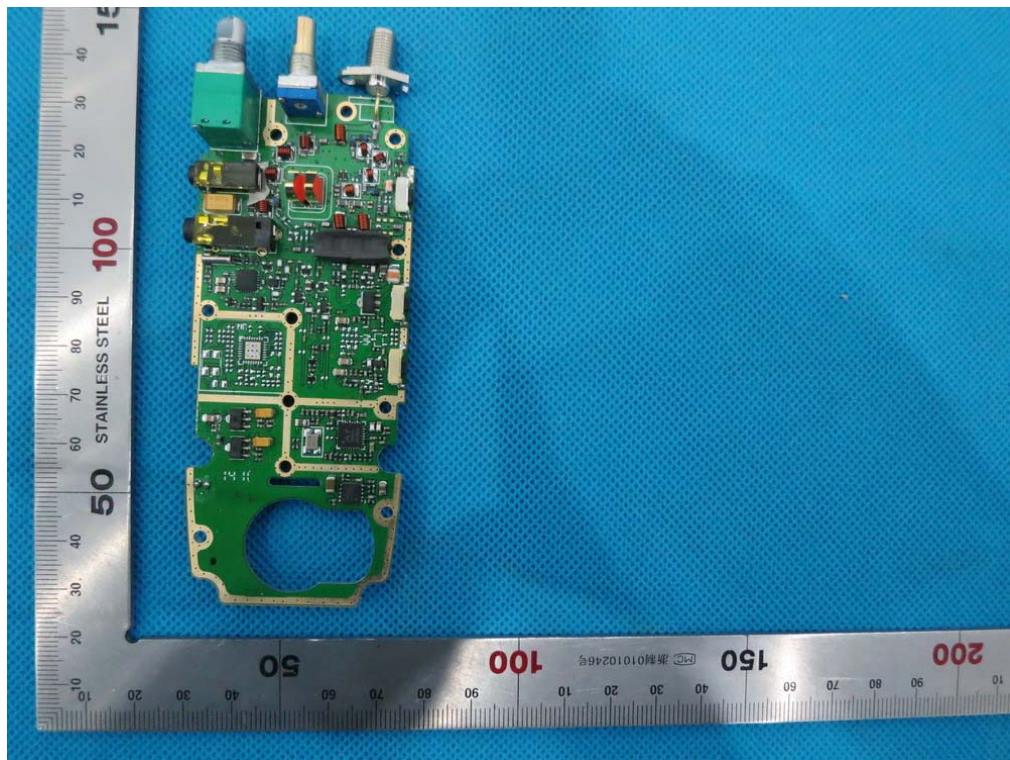

INTERNAL VIEW-7 OF EUT

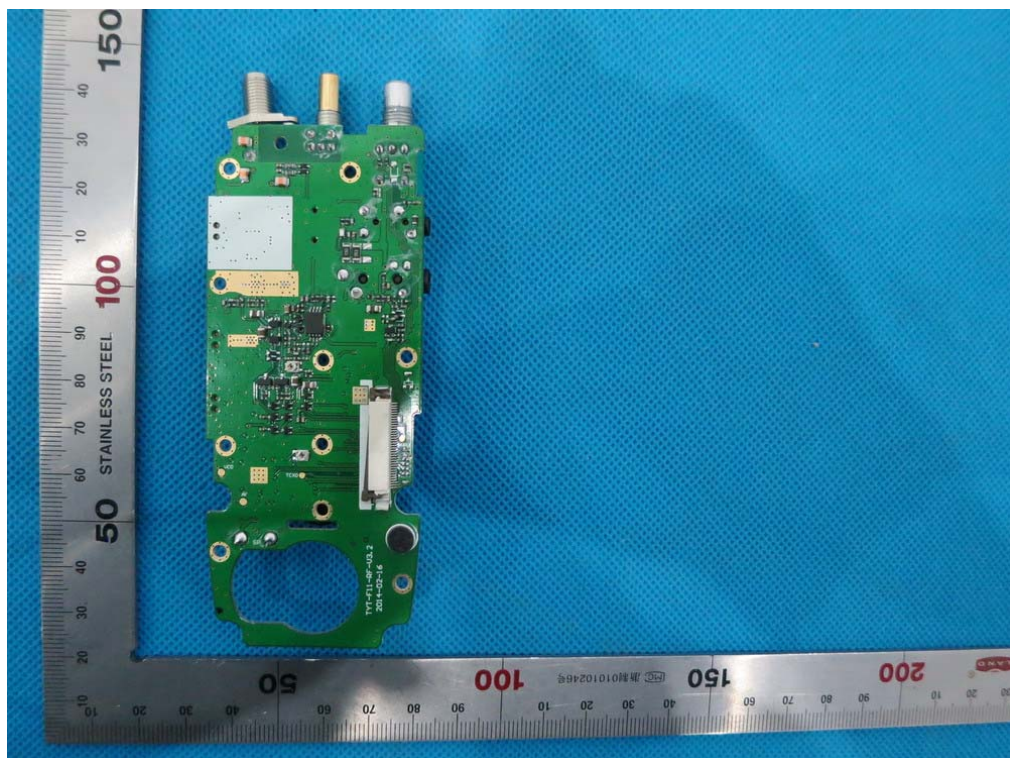

-----END OF REPORT-----