

---

# FCC Part 95 Rules Test Report

---

Report No.:AGC02931190802FE10

**FCC ID** : PODGMRS-45  
**PRODUCT DESIGNATION** : Analog Transceiver  
**BRAND NAME** : TYT  
**MODEL NAME** : GMR45  
**APPLICANT** : TYT Electronics Co., Ltd.  
**DATE OF ISSUE** : Aug. 20, 2019  
**STANDARD(S)** : FCC Part 95 Rules  
**REPORT VERSION** : V 1.0

## Attestation of Global Compliance (Shenzhen) Co., Ltd

**CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Attestation of Global Compliance

Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,  
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline: 400 089 2118

### Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Aug. 20, 2019	Valid	Initial release



## VERIFICATION OF COMPLIANCE

<b>Applicant</b>	TYT Electronics Co., Ltd.
<b>Address</b>	Block 39-1, Optoelectronics-information industry base, Nan'an, Quanzhou, Fujian, China.
<b>manufacturer</b>	TYT Electronics Co., Ltd.
<b>Address</b>	Block 39-1, Optoelectronics-information industry base, Nan'an, Quanzhou, Fujian, China.
<b>Factory</b>	TYT Electronics Co., Ltd.
<b>Address</b>	Block 39-1, Optoelectronics-information industry base, Nan'an, Quanzhou, Fujian, China.
<b>Product Designation:</b>	Analog Transceiver
<b>Brand Name:</b>	TYT
<b>Test Model</b>	GMR45
<b>Date of Test:</b>	Aug. 12, 2019~Aug. 20, 2019

## WE HEREBY CERTIFY THAT:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in TIA/EIA 603. The sample tested as described in this report is in compliance with the FCC Rules Part 95 requirements. The test results of this report relate only to the tested sample identified in this report.

Prepared By



Calvin Liu  
(Project Engineer)

Aug. 20, 2019


Reviewed By



Max Zhang  
(Reviewer)

Aug. 20, 2019

Approved By



Forrest Lei  
Authorized Officer

Aug. 20, 2019

## TABLE OF CONTENTS

<b>1. GENERAL INFORMATION.....</b>	<b>6</b>
1.1 PRODUCT DESCRIPTION.....	6
1.2 RELATED SUBMITTAL(S) / GRANT (S).....	8
1.3 TEST METHODOLOGY.....	8
1.4 TEST FACILITY .....	8
1.5 SPECIAL ACCESSORIES .....	8
1.6 EQUIPMENT MODIFICATIONS .....	8
<b>2. SYSTEM TEST CONFIGURATION .....</b>	<b>9</b>
2.1 EUT CONFIGURATION.....	9
2.2 EUT EXERCISE .....	9
2.3 CONFIGURATION OF TESTED SYSTEM .....	10
<b>3. SUMMARY OF TEST RESULTS .....</b>	<b>11</b>
<b>4. DESCRIPTION OF TEST MODES.....</b>	<b>13</b>
<b>5. FREQUENCY TOLERANCE.....</b>	<b>14</b>
5.1 PROVISIONS APPLICABLE.....	14
5.2 MEASUREMENT PROCEDURE .....	14
5.3 TEST SETUP BLOCK DIAGRAM .....	15
5.4 TEST RESULT .....	16
<b>6. EMISSION BANDWIDTH.....</b>	<b>18</b>
6.1 PROVISIONS APPLICABLE .....	18
6.2 MEASUREMENT PROCEDURE .....	18
6.3 TEST SETUP BLOCK DIAGRAM .....	19
6.4 MEASUREMENT RESULT .....	22
<b>7. UNWANTED RADIATION .....</b>	<b>25</b>
7.1 PROVISIONS APPLICABLE .....	25
7.2 MEASUREMENT PROCEDURE .....	25
7.3 TEST SETUP BLOCK DIAGRAM .....	27
7.4 MEASUREMENT RESULTS:.....	29
7.5 EMISSION MASK PLOT .....	35
<b>8. AUDIO LOW PASS FILTER RESPONSE .....</b>	<b>38</b>
8.1.PROVISIONS APPLICABLE .....	38
8.2.TEST PROCEDURE .....	38
8.3 TEST CONFIGURATION .....	38
8.4 TEST RESULT .....	39



<b>9. MAXIMUM TRANSMITTER POWER .....</b>	<b>40</b>
9.1 PROVISIONS APPLICABLE .....	40
9.2 TEST PROCEDURE .....	41
9.3 TEST CONFIGURATION .....	42
9.4 TEST RESULT .....	44
<b>10. MODULATION CHARACTERISTICS .....</b>	<b>45</b>
10.1 PROVISIONS APPLICABLE .....	45
10.2 MEASUREMENT METHOD .....	45
10.3 MEASUREMENT RESULT .....	46
<b>APPENDIX I: PHOTOGRAPHS OF SETUP .....</b>	<b>49</b>
<b>APPENDIX II: EXTERNAL VIEW OF EUT .....</b>	<b>50</b>



## 1. GENERAL INFORMATION

### 1.1 PRODUCT DESCRIPTION

The EUT is a **Analog Transceiver** designed for voice communication. It is designed by way of utilizing the FM modulation achieves the system operating.

A major technical description of EUT is described as following:

Product Designation	Analog Transceiver
Test Model	GMR45
Hardware Version	TH-9000D-UHF-1.5
Software Version	V2.1
Modulation	FM
Channel Separation	12.5KHz
Emission Type	F3E
Emission Bandwidth	10.474KHz
Maximum Transmitter Power	46.49 dBm
Rated Output power	5W/45W (It was fixed by the manufacturer, any individual can't arbitrarily change it.)
Antenna Designation	Detachable
Antenna Type	External antenna
Antenna Gain	0dBi
Power Supply	DC 13.8V
Limiting Voltage	DC 11.73 V~ 15.87V
Operation Frequency Range and Channel	GMRS: 462.5625MHz -462.7125MHz(5W) 462.5500MHz -462.7250MHz(45W) 467.5500MHz -467.7250MHz(45W) Test Channel :4, 11 and 19 channel
Frequency Tolerance	1.096ppm

**Channel List:**

CH. No	CH. Freq	Power	CH. No	CH. Freq	Power
1	462.5625	5W	13	462.6750	45W
2	462.5875		14	462.7000	
3	462.6125		15	462.7250	
4	462.6375		16	467.5500	45W
5	462.6625		17	467.5750	
6	462.6875		18	467.6000	
7	462.7125		19	467.6250	
8	462.5500	45W	20	467.6500	
9	462.5750		21	467.6750	
10	462.6000		22	467.7000	
11	462.6250		23	467.7250	
12	462.6500				



## 1.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for FCC ID:**PODGMRS-45**, filing to comply with the FCC Part 95 requirements.

## 1.3 TEST METHODOLOGY.

The radiated emission testing was performed according to the procedures of TIA/EIA 603.

## 1.4 TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Designation Number	CN1259
FCC Test Firm Registration Number	975832
A2LA Cert. No.	5054.02
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA

## 1.5 SPECIAL ACCESSORIES

Not available for this EUT intended for grant.

## 1.6 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.



## 2. SYSTEM TEST CONFIGURATION

### 2.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### 2.2 EUT EXERCISE

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.



## 2.3 CONFIGURATION OF TESTED SYSTEM

Fig. 2-1 Configuration of Tested System




Table 2-1 Equipment Used in Tested System

Item	Equipment	Model No.	Identifier	Note
1	Analog Transceiver	GMR45	FCC ID: PODGMRS-45	EUT



### 3. SUMMARY OF TEST RESULTS

FCC 47 CFR Part 95 Test Cases			
Test Item	Test Requirement	Test Method	Result
Maximum Transmitter Power	FCC CFR Part 95.1767 FCC 47 CFR Part 2.1046(a)	ANSI/TIA-603-E-2016	PASS
Modulation Limit	FCC CFR Part 95.1775 FCC 47 CFR Part 2.1047(a)(b)	ANSI/TIA-603-E-2016	PASS
Audio Frequency Response	FCC CFR Part 95.1775 FCC 47 CFR Part 2.1047(a)	ANSI/TIA-603-E-2016	PASS
Audio Low Pass Filter Response	FCC 47 CFR Part 95.1775(e)	ANSI/TIA-603-E-2016	PASS
Emission Bandwidth	FCC CFR Part 95.1773	ANSI/TIA-603-E-2016	PASS
Emission Mask	FCC CFR Part 95.1779	ANSI/TIA-603-E-2016	PASS
Transmitter Radiated Spurious Emission	FCC CFR Part 95.1779	ANSI/TIA-603-E-2016	PASS
Frequency Stability	FCC CFR Part 95.1765 FCC 47 CFR Part 2.1055 (a)(1)	ANSI/TIA-603-E-2016	PASS
<b>Note:</b> 1) N/A: In this whole report not application. 2) The EUT is External antenna			



# LIST OF EQUIPMENTS USED

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Jun. 12, 2019	Jun. 11, 2020
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec.06, 2018	Dec.05, 2019
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep.18, 2018	Sep.17, 2019
preamplifier	ChengYi	EMC184045SE	980508	Sep.20, 2018	Sep.19, 2020
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	May 17, 2019	May 16, 2021
Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-205	Jun. 12, 2019	Jun. 11, 2020
HORN ANTENNA	EM	EM-AH-10180	/	Mar.01, 2018	Feb.29, 2020
SIGNAL GENERATOR	AGILENT	E4421B	122501288	Jun. 12, 2019	Jun. 11, 2020
SIGNAL GENERATOR	R&S	SMT03	A0304261	Jun. 12, 2019	Jun. 11, 2020
ANTENNA	SCHWARZBECK	VULB9168	VULB9168-494	Jan. 09, 2019	Jan. 08, 2020
ANTENNA	SCHWARZBECK	VULB9168	D69250	Sep.26, 2018	Sep.25, 2019
Modulation Domain Analyzer	HP	53310A	3121A02467	Nov. 01, 2018	Oct. 31, 2019
Small environmental tester	ESPEC	SH-242	--	Feb. 25, 2019	Feb. 24, 2020
RF Communication Test Set	HP	8920B	--	Jun. 12, 2019	Jun. 11, 2020
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	Jun. 12, 2019	Jun. 11, 2020
Attenuator	Weinachel Corp	58-30-33	ML030	Jul. 10, 2019	Jul. 09, 2020
Vector Analyzer	Agilent	E4440A	--	Feb. 27, 2019	Feb. 26, 2020
RF Cable	R&S	1#	--	Each time	N/A
RF Cable	R&S	2#	--	Each time	N/A

Note: 8920B can generate audio modulation frequency.



#### 4. DESCRIPTION OF TEST MODES

##### RF TEST MODES

The EUT (**Analog Transceiver**) has been tested under normal operating condition. (GMRS TX) are chosen for testing at each channel separation.

No.	TEST MODES	CHANNEL SEPARATION
1	GMRS TX	12.5 KHz

**Note:1.** Only the result of the worst case was recorded in the report.



## 5. FREQUENCY TOLERANCE

### 5.1 PROVISIONS APPLICABLE

Standard Applicable [Part 95.1765]The carrier frequency stability is the ability of the transmitter to maintain an assigned carrier frequency.

FCC Part 95.1765,

GMRS: The carrier frequency of each GMRS transmitter transmitting an emission with an occupied bandwidth of 12.5 kHz or less must remain within 2.5 ppm

The carrier frequency of each GMRS transmitter transmitting an emission with an occupied bandwidth greater than 12.5 kHz must remain within 5 ppm

### 5.2 MEASUREMENT PROCEDURE


#### 5.2.1 Frequency stability versus environmental temperature

1. Setup the configuration per figure 1 for frequencies measurement inside an environment chamber, Install new battery in the EUT.
2. Turn on EUT and set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1KHz and Video Resolution Bandwidth to 1KHz and Frequency Span to 50KHz.Record this frequency as reference frequency.
3. Set the temperature of chamber to 50 °C . Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
4. Repeat step 2 with a 10°C decreased per stage until the lowest temperature -30°C is measured, record all measured frequencies on each temperature step.

#### 5.2.2 Frequency stability versus input voltage

1. Setup the configuration per figure 1 for frequencies measured at temperature if it is within 15°C to 25°C . Otherwise, an environment chamber set for a temperature of 20°C shall be used. The EUT shall be powered by DC 13.8V.
2. Set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1 KHz and Video Resolution Bandwidth to 1KHz. Record this frequency as reference frequency.
3. Supply the EUT primary voltage at the operating end point which is specified by manufacturer and record the frequency.

### 5.3 TEST SETUP BLOCK DIAGRAM

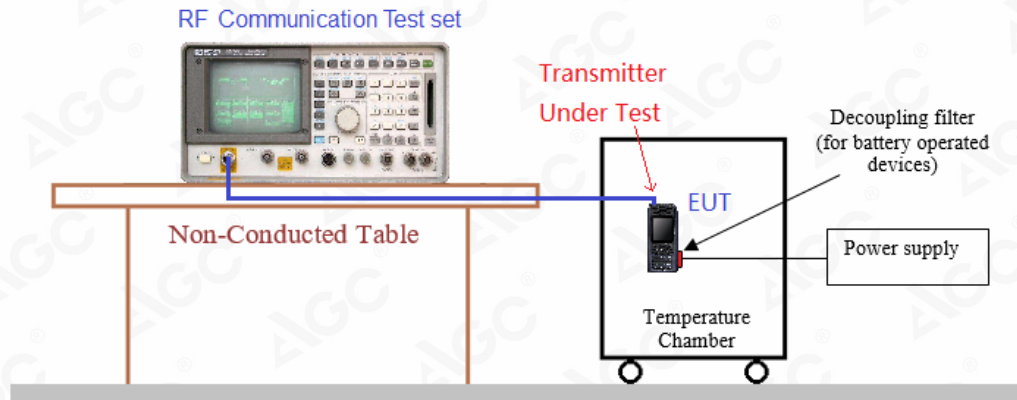

## 5.4TEST RESULT

(1) Frequency stability versus input voltage (Supply nominal voltage is 13.8V)

Environment Temperature  (°C)	Power Supply	Reference Frequency			Limit:
	(V)	462.6375MHz	462.6250MHz	467.6250MHz	ppm
50	DC 13.8V	0.874	0.653	0.656	±2.5for GMRS
40	DC 13.8V	0.922	0.722	0.844	
30	DC 13.8V	0.923	0.586	1.057	
20	DC 13.8V	0.798	0.848	1.070	
10	DC 13.8V	0.767	1.052	0.680	
0	DC 13.8V	0.697	0.984	0.932	
-10	DC 13.8V	0.955	0.604	0.892	
-20	DC 13.8V	0.549	0.843	0.877	
-30	DC 13.8V	0.907	0.714	0.712	
Result	Pass				

(2) Frequency stability versus input voltage (Battery limiting voltage is 11.73V)

Environment Temperature(℃)	Power Supply	Reference Frequency			Limit:
	(V)	462.6375MHz	462.6250MHz	467.6250MHz	ppm
50	DC11.73V	0.657	0.851	0.456	±2.5for GMRS
40	DC11.73V	0.851	0.797	0.436	
30	DC11.73V	0.463	0.447	0.776	
20	DC11.73V	0.468	0.818	0.327	
10	DC11.73V	0.667	0.381	0.668	
0	DC11.73V	0.774	0.623	0.351	
-10	DC11.73V	0.342	0.932	0.625	
-20	DC11.73V	0.777	0.407	0.722	
-30	DC11.73V	0.473	0.748	0.534	
Result	Pass				





## (3) Frequency stability versus input voltage (Battery Fully Charged voltage is 15.87V)

Environment Temperature(℃)	Power Supply	Reference Frequency			Limit:
	(V)	462.6375MHz	462.6250MHz	467.6250MHz	ppm
50	DC 15.87V	0.613	0.653	0.703	±2.5for GMRS
40	DC 15.87V	0.595	1.096	1.057	
30	DC 15.87V	0.563	1.031	0.612	
20	DC 15.87V	0.534	0.528	0.823	
10	DC 15.87V	0.901	0.933	0.807	
0	DC 15.87V	1.049	0.553	0.955	
-10	DC 15.87V	0.816	0.917	0.507	
-20	DC 15.87V	1.096	0.959	0.814	
-30	DC 15.87V	0.659	1.061	1.026	
Result	Pass				



## 6. EMISSION BANDWIDTH

### 6.1 PROVISIONS APPLICABLE

FCC Part 95.1773: GMRS:

(a) Main channels. The authorized bandwidth is 20 kHz for GMRS transmitters operating on any of the 462 MHz main channels, or any of the 467 MHz main channels.

(b) Interstitial channels. The authorized bandwidth is 20 kHz for GMRS transmitters operating on any of the 462 MHz interstitial channels, and is 12.5 kHz for GMRS transmitters operating on any of the 467 MHz interstitial channels.

Occupied Bandwidth: The EUT was connected to the audio signal generator and the spectrum analyzer via the main RF connector, and through an appropriate attenuator. The EUT was controlled to transmit its maximum power. Then the bandwidth of 99% power can be measured by the spectrum analyzer.

### 6.2 MEASUREMENT PROCEDURE


- 1). The EUT was modulated by 2.5 KHz Sine wave audio signal, The level of the audio signal employed is 16 dB greater than that necessary to produce 50% of rated system deviation. Rated system deviation is 2.5 kHz (12.5 kHz channel spacing).
- 2). Set SPA Center Frequency = fundamental frequency, RBW=300Hz.VBW= 1KHz, Span =50 KHz.
- 3). Set SPA Max hold. Mark peak, -26 dB.





### 6.3 TEST SETUP BLOCK DIAGRAM

Radiation method:

**Radiated Below 1GHz**

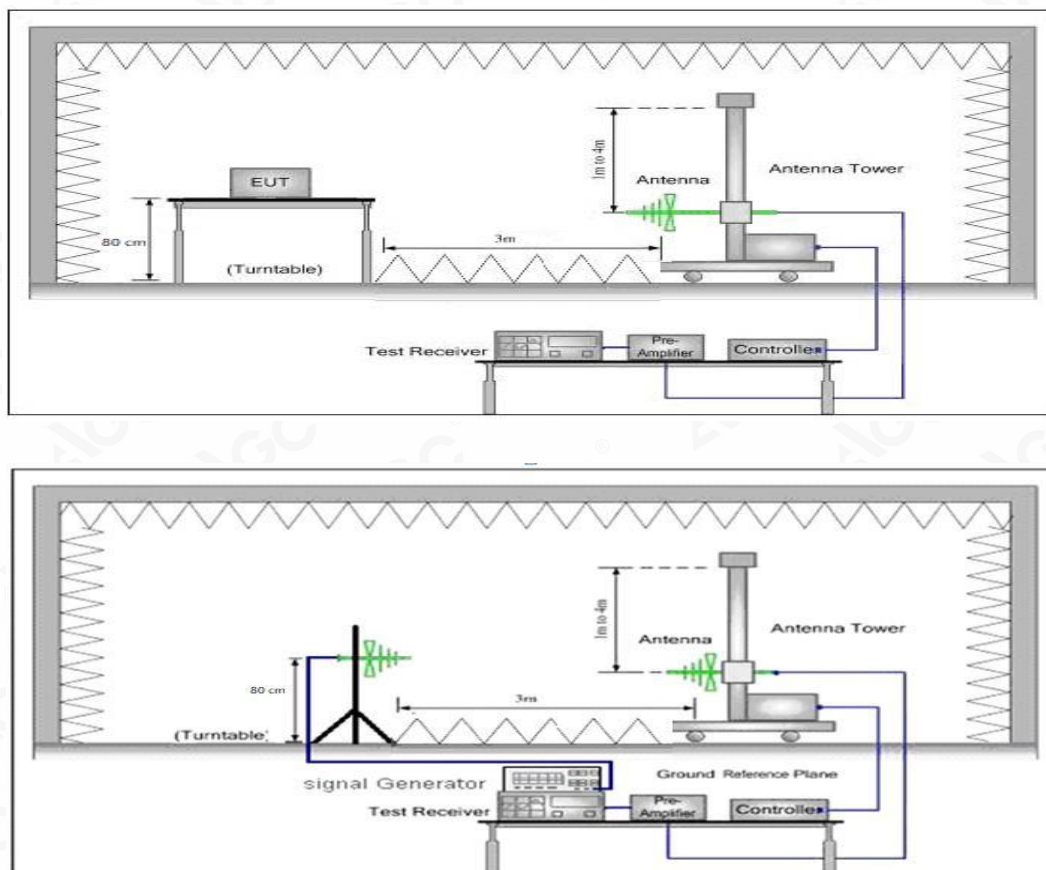


**Radiated Above 1 GHz**

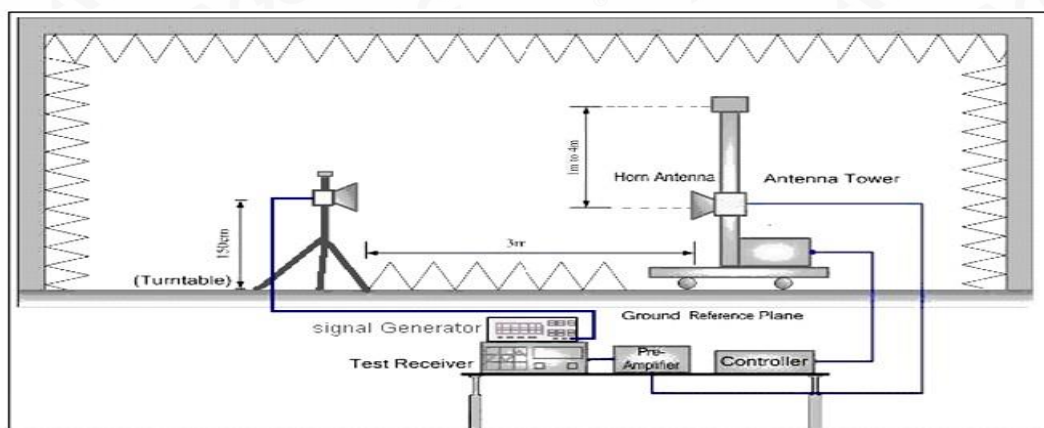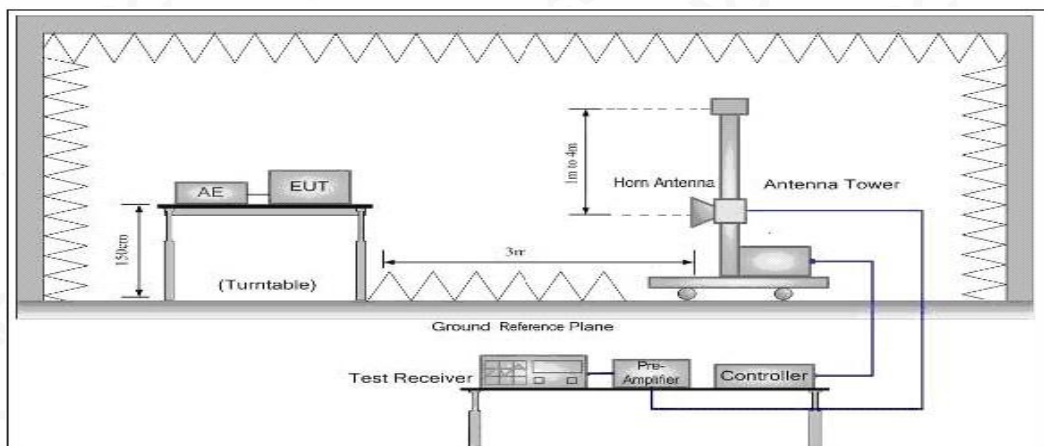




**Conduction method:**

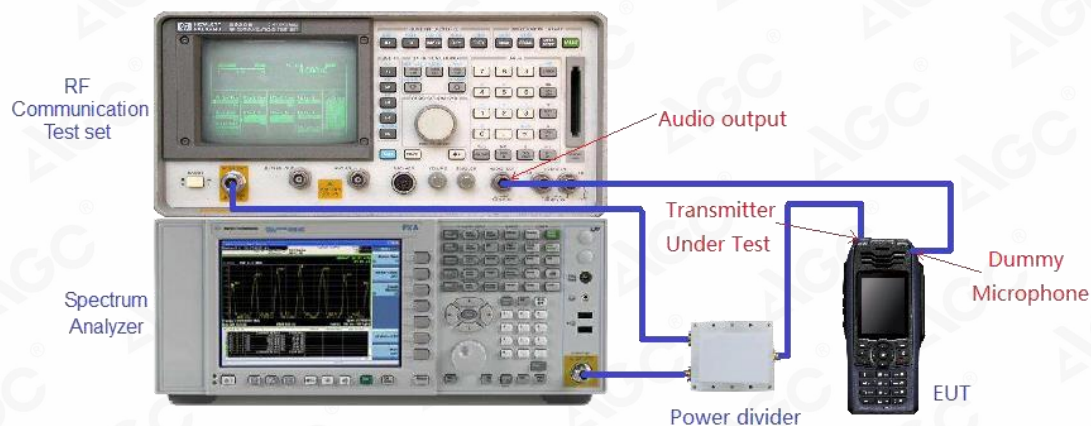

#### 6.4 MEASUREMENT RESULT


26 dB Bandwidth Measurement Result-5W			
Operating Frequency	12.5 KHz Channel Separation		
	Test Data	Limits	Result
462.6375MHz	10.448 KHz	20 KHz	Pass

#### Occupied bandwidth of 462.6375MHz

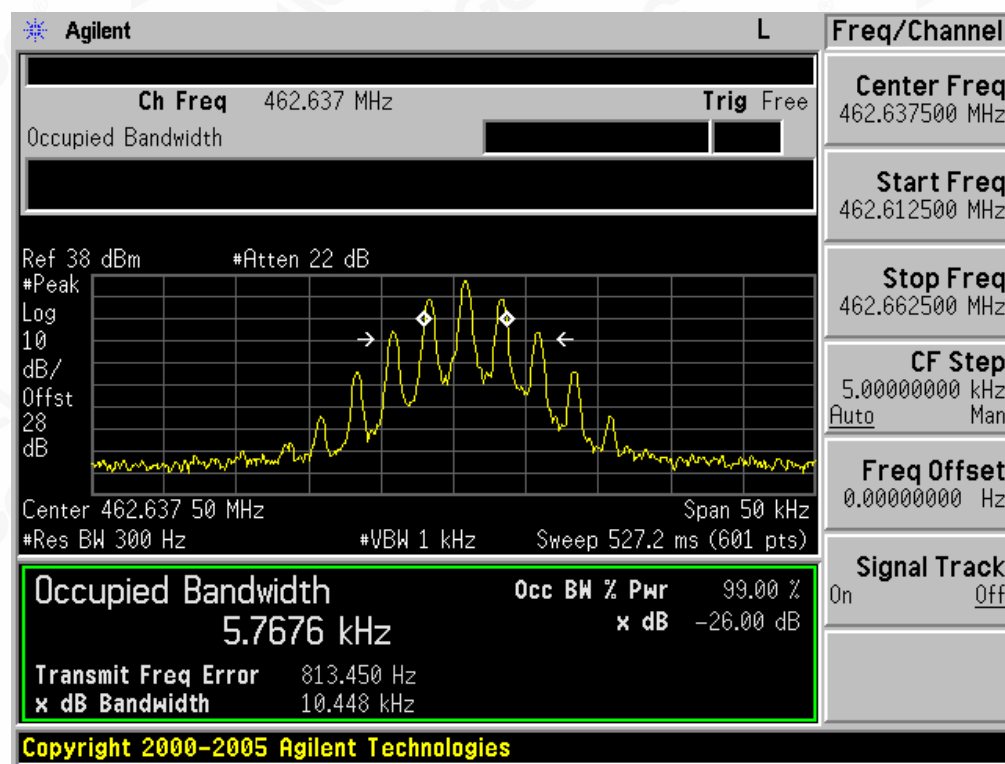


26 dB Bandwidth Measurement Result-45W			
Operating Frequency	12.5 KHz Channel Separation		
	Test Data	Limits	Result
462.6250MHz	10.438 KHz	20 KHz	Pass
467.6250MHz	10.474 KHz	20 KHz	Pass

### Occupied bandwidth of 462.6250MHz

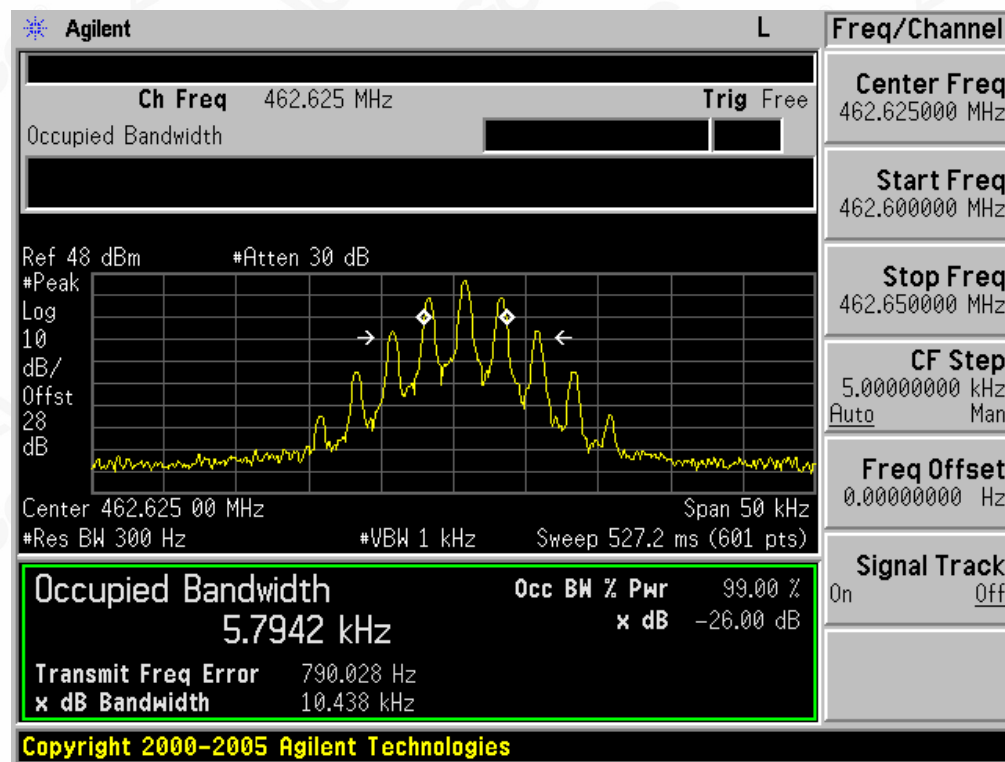

### Occupied bandwidth of 467.6250MHz

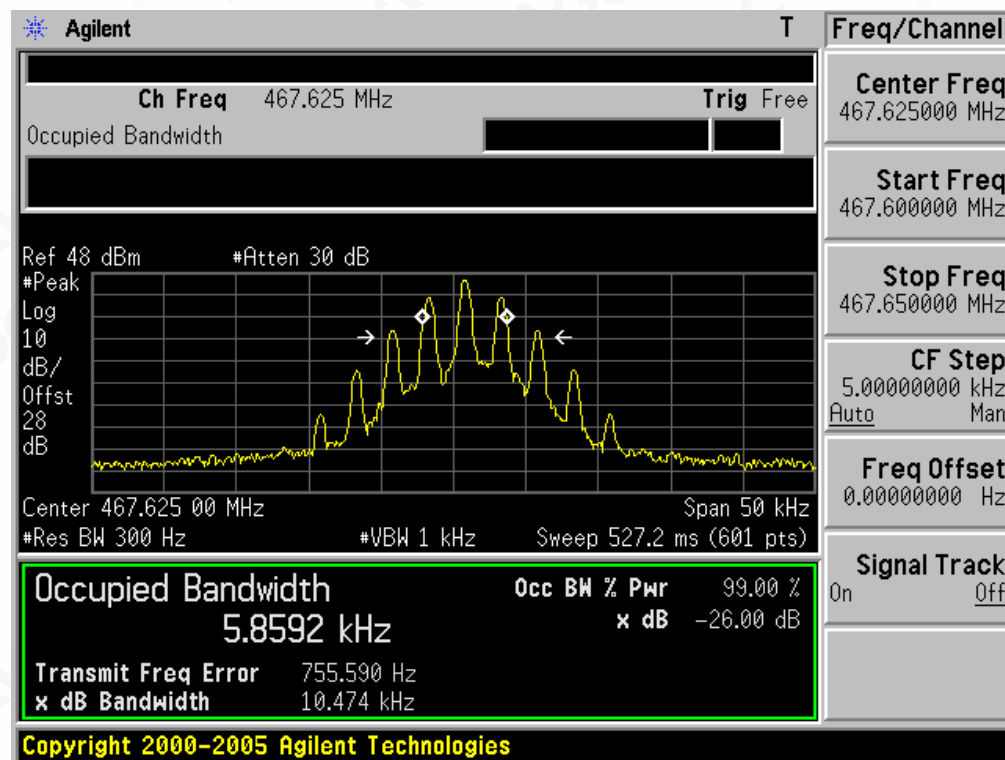



## 7. UNWANTED RADIATION

### 7.1 PROVISIONS APPLICABLE

Standard Applicable [FCC Part 95.1779]

According to FCC section 95.1779, the unwanted emission should be attenuated below TP by at least  $43+10 \log(\text{Transmit Power})$  dB.

### 7.2 MEASUREMENT PROCEDURE

Each GMRS transmitter type must be designed to comply with the applicable unwanted emissions limits in this section.

(a)Emission masks. Emission masks applicable to transmitting equipment in the GMRS are defined by the requirements in the following table. The numbers in the attenuation requirements column refer to rule paragraph numbers under paragraph (b) of this section.

Emission types filter	Attenuation requirements
A1D, A3E, F1D, G1D, F2D, F3E, G3E with audio filter	(1), (2), (7)
A1D, A3E, F1D, G1D, F3E, G3E without audio filter	(3), (4), (7)
H1D, J1D, R1D, H3E, J3E, R2E	(5), (6), (7)

(1) Filtering noted for GMRS transmitters refers to the requirement in §95.1775(e).

(2) Unwanted emission power may be measured as either mean power or peak envelope power, provided that the transmitter output power is measured the same way.

(b) Attenuation requirements. The power of unwanted emissions must be attenuated below the transmitter output power in Watts (P) by at least:

(1) 25 dB (decibels) on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 100% of the authorized bandwidth.

(2) 35 dB on any frequency removed from the center of the authorized bandwidth by more than 100% up to and including 250% of the authorized bandwidth.

(3)  $83 \log (f_d \div 5)$  dB on any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 5 kHz up to and including 10 kHz.

(4)  $116 \log (f_d \div 6.1)$  dB or  $50 + 10 \log (P)$  dB, whichever is the lesser attenuation, on any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz), of more than 10 kHz up to and including 250% of the authorized bandwidth.

(5) 25 dB on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 150% of the authorized bandwidth.

(6) 35 dB on any frequency removed from the center of the authorized bandwidth by more than 150% up to and including 250% of the authorized bandwidth.


(7)  $43 + 10 \log (P)$  dB on any frequency removed from the center of the authorized bandwidth by more than 250%.

- (1) EUT was placed on a 0.8 or 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made. The radiated emission measurements of all transmit frequencies in all channels were measured with peak detector.
- (2) A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- (3) The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).
- (4) The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
- (5) A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
- (6) The measurement results are obtained as described below:  $\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} - \text{Ga}$  The measurement results are amend as described below:  
 $\text{Power(EIRP)} = \text{PMea} - \text{Pcl} - \text{Ga}$
- (7) This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.  
ERP can be calculated from EIRP by subtracting the gain of the dipole,  $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$ .
- (8) Test the EUT in the lowest channel, the middle channel the Highest channel

### 7.3 TEST SETUP BLOCK DIAGRAM



#### SUBSTITUTION METHOD: (Radiated Emissions)

##### Radiated Below 1GHz

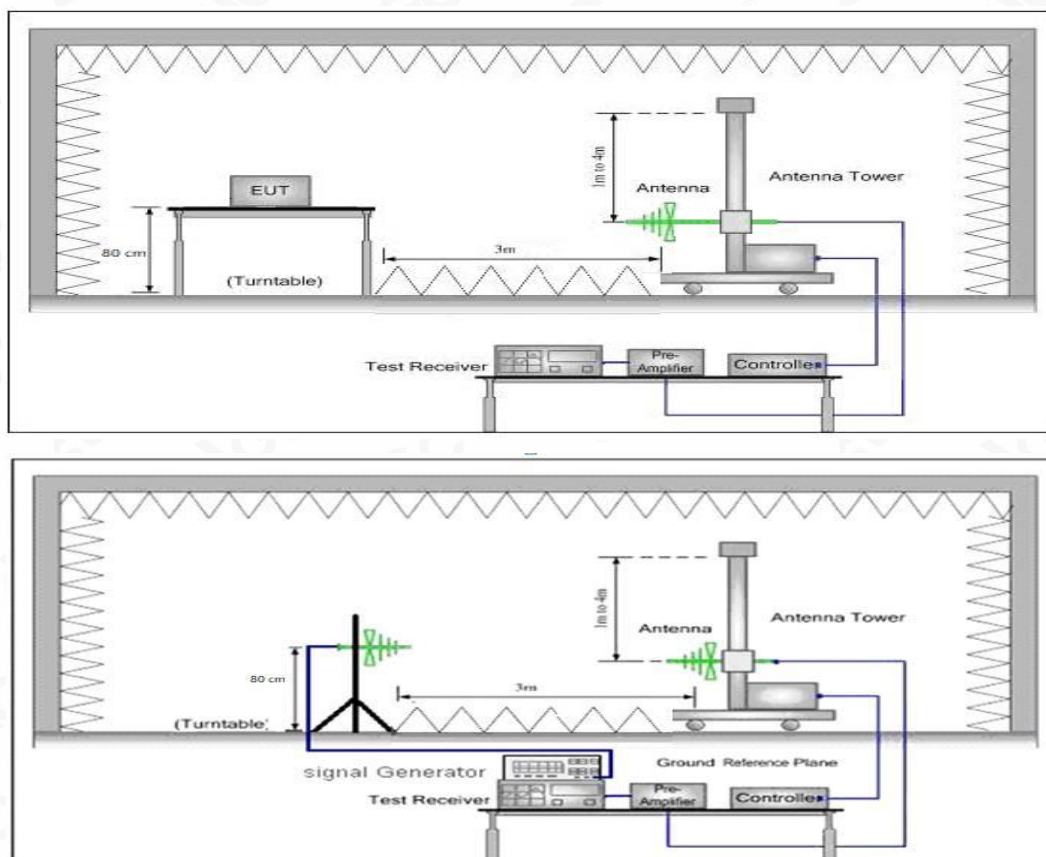



**Radiated Above 1 GHz**

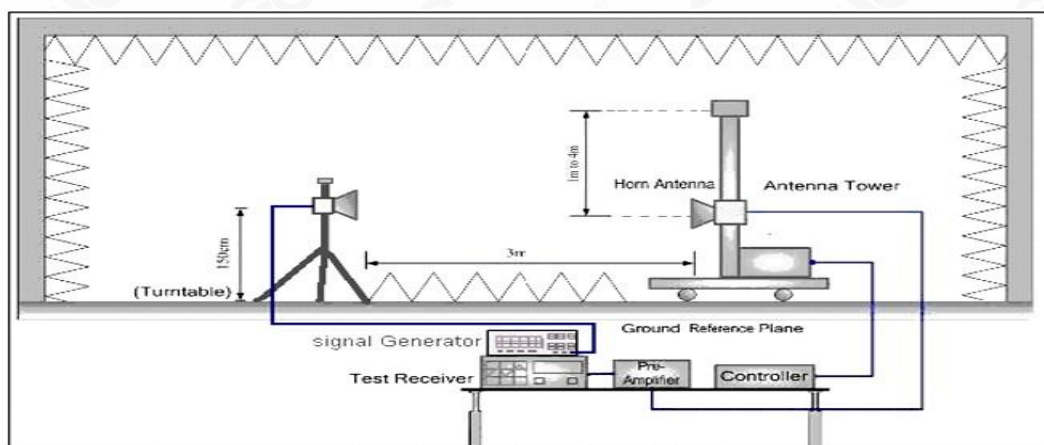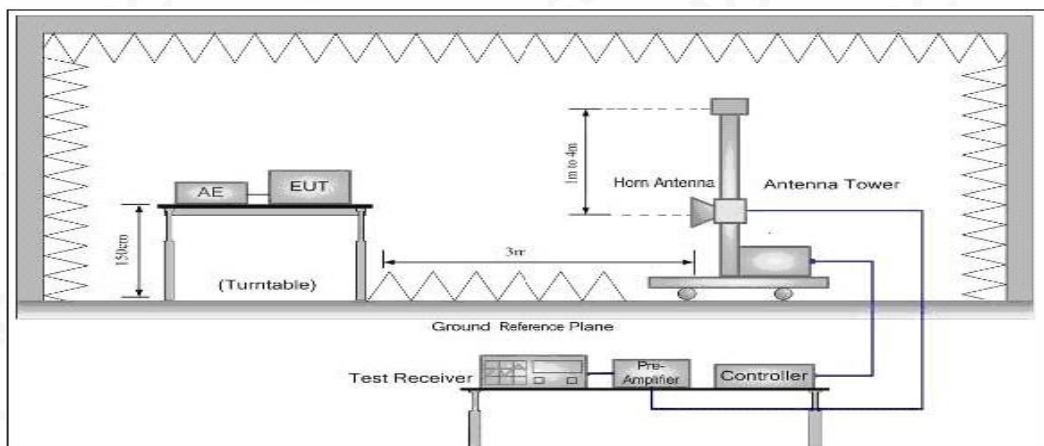




#### 7.4 MEASUREMENT RESULTS:

the unwanted emission should be attenuated below TP by at least  $43+10 \log(\text{Transmit Power})$  dB

**Limit:** At least  $43+10 \log(P) = 43+10 \log(5) = 49.99$  (dBc)     $36.99-49.99=-13$ dBm

At least  $43+10 \log(P) = 43+10 \log(45) = 59.53$  (dBc)     $46.53-59.53=-13$ dBm

#### Measurement Result for 12.5 KHz Channel Separation @ 462.6375MHz-5W-Horizontal

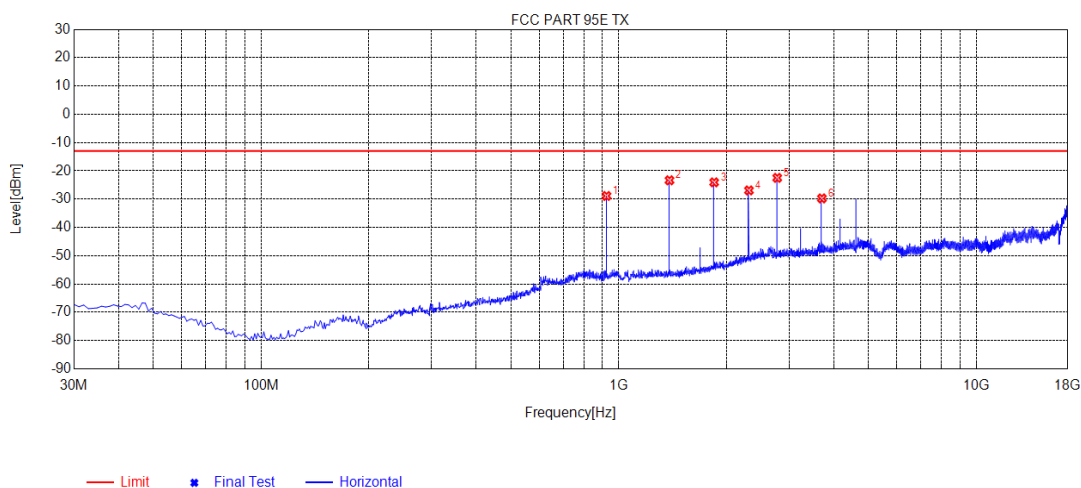


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	925.2352	-72.36	-28.87	-13.00	15.87	43.49	47	Horizontal
2	1387.6388	-19.89	-23.34	-13.00	10.34	-3.45	257	Horizontal
3	1850.0850	-23.47	-24.06	-13.00	11.06	-0.59	248	Horizontal
4	2314.2314	-29.90	-26.91	-13.00	13.91	2.99	286	Horizontal
5	2776.6777	-27.38	-22.47	-13.00	9.47	4.91	142	Horizontal
6	3701.5702	-36.55	-29.74	-13.00	16.74	6.81	219	Horizontal

#### Note:

1. Factor=Antenna Factor + Cable loss. (Below 1GHz)
2. Factor=Antenna Factor+ Cable loss-Pre-amplifier.(Above 1 GHz)
3. Margin=Limit- Level

# Measurement Result for 12.5 KHz Channel Separation @ 462.6375MHz-5W-Vertical

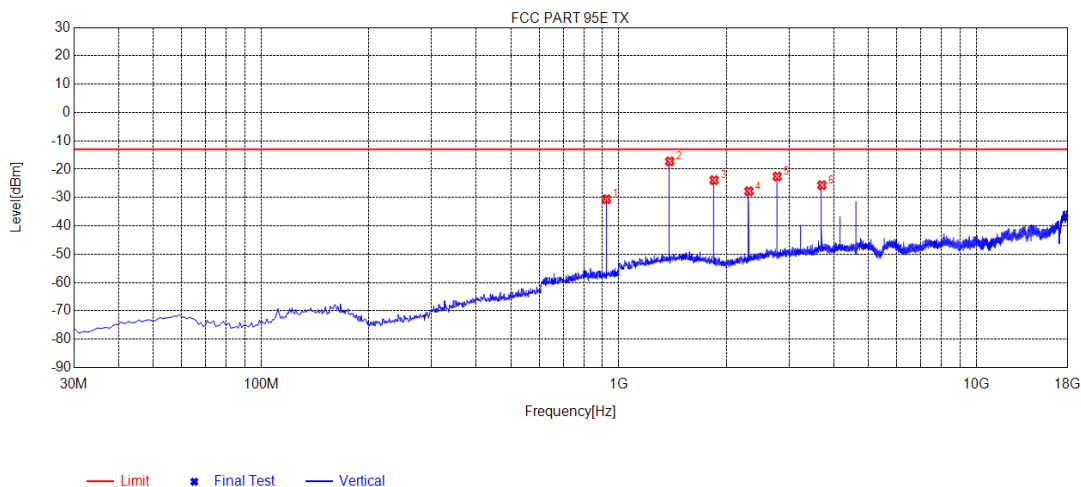


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	925.2352	-74.15	-30.58	-13.00	17.58	43.57	85	Vertical
2	1389.3389	-18.68	-17.25	-13.00	4.25	1.43	199	Vertical
3	1850.0850	-24.79	-23.86	-13.00	10.86	0.93	142	Vertical
4	2314.2314	-30.17	-27.77	-13.00	14.77	2.40	199	Vertical
5	2776.6777	-27.06	-22.58	-13.00	9.58	4.48	333	Vertical
6	3701.5702	-32.19	-25.63	-13.00	12.63	6.56	209	Vertical

## Note:

- Factor=Antenna Factor + Cable loss. (Below 1GHz)
- Factor=Antenna Factor+ Cable loss-Pre-amplifier.(Above 1 GHz)
- Margin=Limit- Level

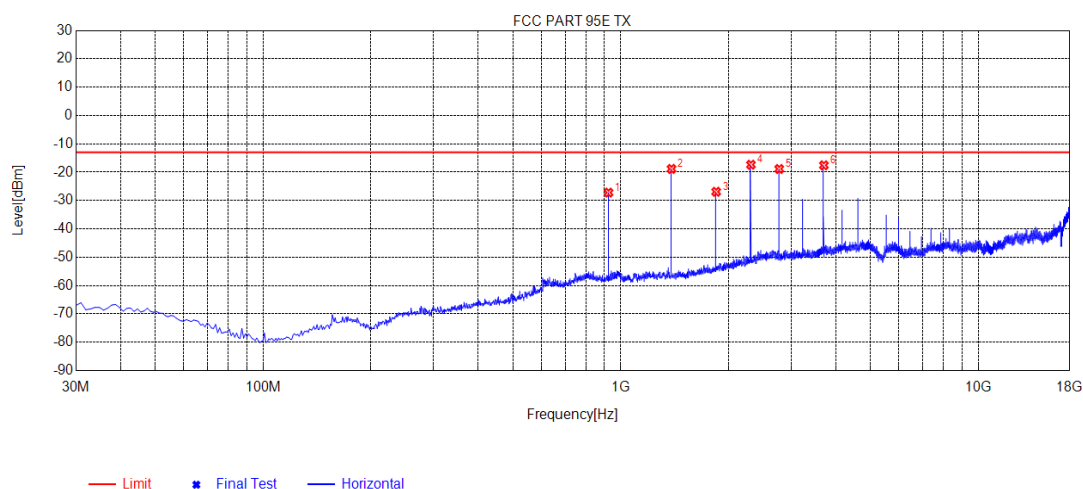

**Measurement Result for 12.5 KHz Channel Separation @ 462.6250MHz-45W-Horizontal**


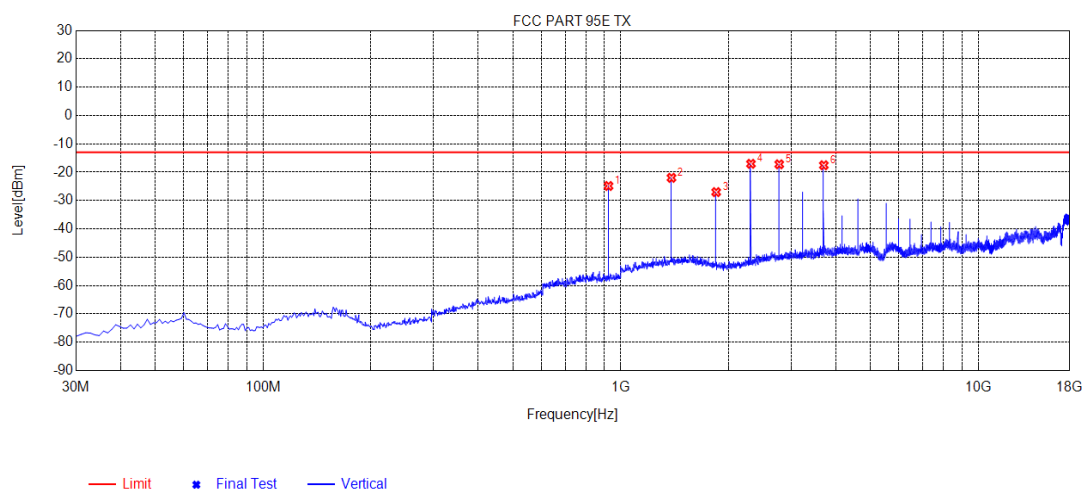
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	925.2352	-70.69	-27.20	-13.00	14.20	43.49	295	Horizontal
2	1387.6388	-15.39	-18.84	-13.00	5.84	-3.45	124	Horizontal
3	1850.0850	-26.31	-26.90	-13.00	13.90	-0.59	247	Horizontal
4	2314.2314	-20.35	-17.36	-13.00	4.36	2.99	190	Horizontal
5	2776.6777	-23.78	-18.87	-13.00	5.87	4.91	162	Horizontal
6	3701.5702	-24.38	-17.57	-13.00	4.57	6.81	209	Horizontal

**Note:**

- Factor=Antenna Factor + Cable loss. (Below 1GHz)
- Factor=Antenna Factor+ Cable loss-Pre-amplifier.(Above 1 GHz)
- Margin=Limit- Level



### Measurement Result for 12.5 KHz Channel Separation @ 462.6250MHz-45W-Vertical




NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	925.2352	-68.43	-24.86	-13.00	11.86	43.57	114	Vertical
2	1387.6388	-23.39	-21.98	-13.00	8.98	1.41	172	Vertical
3	1850.0850	-27.95	-27.02	-13.00	14.02	0.93	57	Vertical
4	2314.2314	-19.44	-17.04	-13.00	4.04	2.40	162	Vertical
5	2776.6777	-21.69	-17.21	-13.00	4.21	4.48	210	Vertical
6	3699.8700	-24.11	-17.56	-13.00	4.56	6.55	210	Vertical

#### Note:

- Factor=Antenna Factor + Cable loss. (Below 1GHz)
- Factor=Antenna Factor+ Cable loss-Pre-amplifier.(Above 1 GHz)
- Margin=Limit- Level



### Measurement Result for 12.5 KHz Channel Separation @ 467.6250MHz-45W-Horizontal

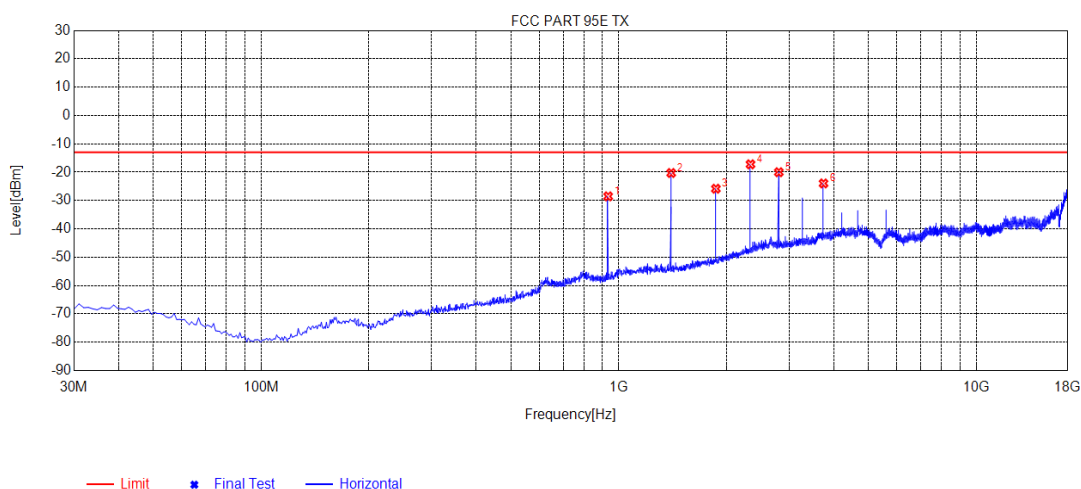

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	934.9449	-72.22	-28.52	-13.00	15.52	43.70	84	Horizontal
2	1402.9403	-16.87	-20.28	-13.00	7.28	-3.41	180	Horizontal
3	1870.4870	-25.39	-25.83	-13.00	12.83	-0.44	246	Horizontal
4	2338.0338	-20.39	-17.22	-13.00	4.22	3.17	189	Horizontal
5	2805.5806	-24.97	-20.01	-13.00	7.01	4.96	199	Horizontal
6	3740.6741	-30.90	-23.96	-13.00	10.96	6.94	199	Horizontal

#### Note:

1. Factor=Antenna Factor + Cable loss. (Below 1GHz)
2. Factor=Antenna Factor+ Cable loss-Pre-amplifier.(Above 1 GHz)
3. Margin=Limit- Level



Attestation of Global Compliance

Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,  
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline: 400 089 2118

### Measurement Result for 12.5 KHz Channel Separation @ 467.6250MHz-45W -Vertical

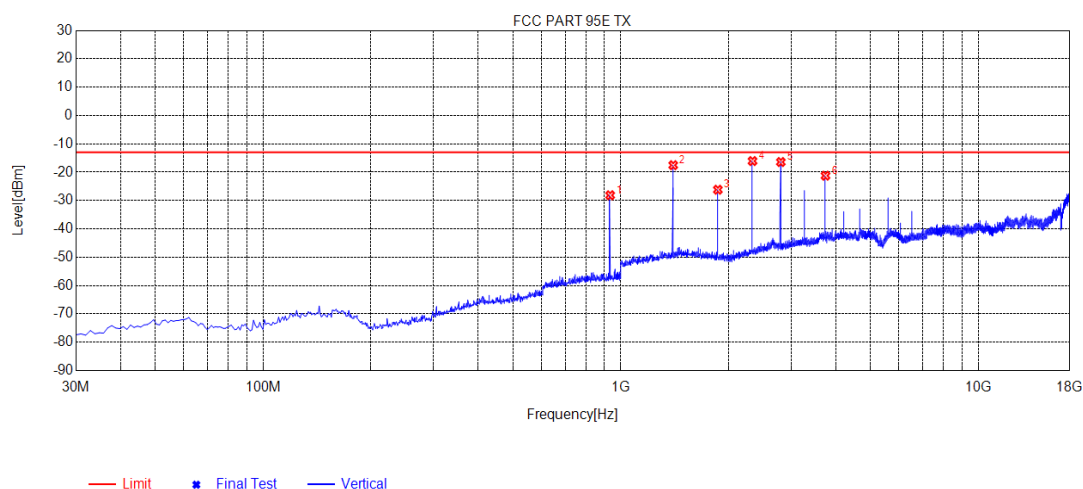

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Angle [°]	Polarity
1	934.9449	-71.81	-28.14	-13.00	15.14	43.67	104	Vertical
2	1402.9403	-19.05	-17.53	-13.00	4.53	1.52	343	Vertical
3	1870.4870	-27.04	-26.18	-13.00	13.18	0.86	142	Vertical
4	2338.0338	-18.62	-16.07	-13.00	3.07	2.55	190	Vertical
5	2805.5806	-20.98	-16.41	-13.00	3.41	4.57	334	Vertical
6	3740.6741	-27.88	-21.23	-13.00	8.23	6.65	359	Vertical

#### Note:

1. Factor=Antenna Factor + Cable loss. (Below 1GHz)
2. Factor=Antenna Factor+ Cable loss-Pre-amplifier.(Above 1 GHz)
3. Margin=Limit- Level



## 7.5 EMISSION MASK PLOT

Standard Applicable [FCC Part 95.1779] GMRS: Unwanted emissions shall be attenuated below the unmodulated carrier power in accordance with the following:


- (1) At least 25 dB (decibels) on any frequency removed from the center of the authorized bandwidth by more than 50 % up to and including 100% of the authorized bandwidth.
- (2) At least 35 dB on any frequency removed from the center of the authorized bandwidth by more than 100 % up to and including 250 % of the authorized bandwidth.
- (3) At least  $43 + 10 \log_{10}(T)$  dB on any frequency removed from the center of the authorized bandwidth by more than 250 %.

The detailed procedure employed for Emission Mask measurements are specified as following:

- The transmitter shall be modulated by a 2.5 kHz audio signal,
- The level of the audio signal employed is 16 dB greater than that necessary to produce 50% of rated system deviation. Rated system deviation is 2.5 kHz.


### CHANNEL 4:

#### The Worst Emission Mask for channel 4 -5W-12.5K

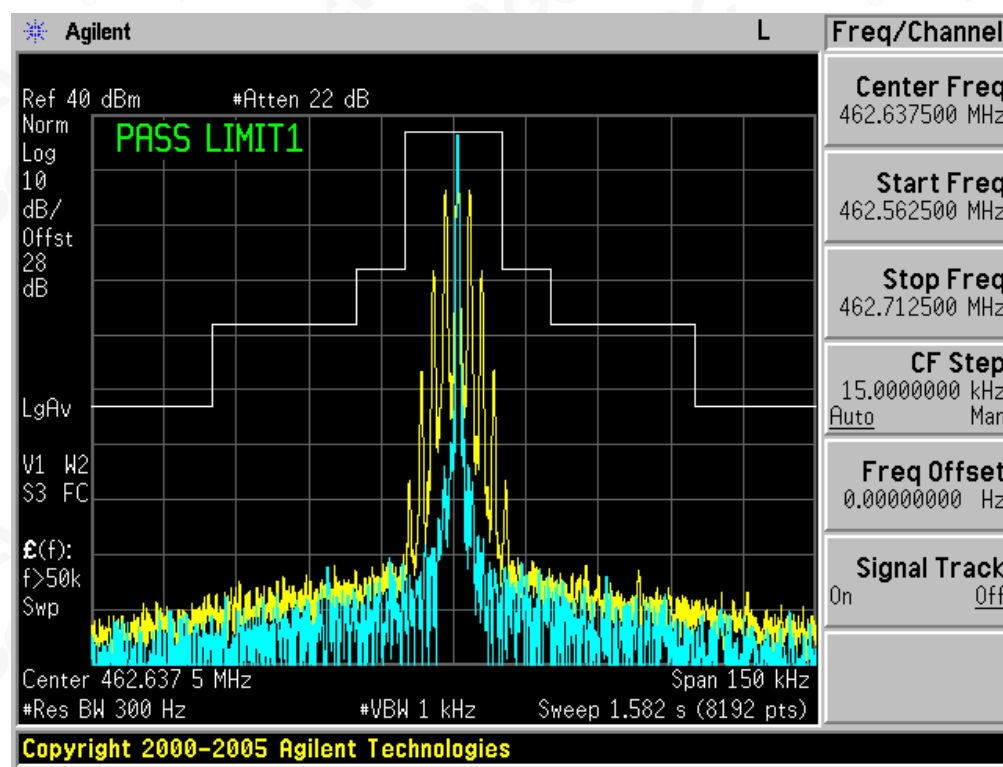

CHANNEL 11:

The Worst Emission Mask for channel 11-45W-12.5K

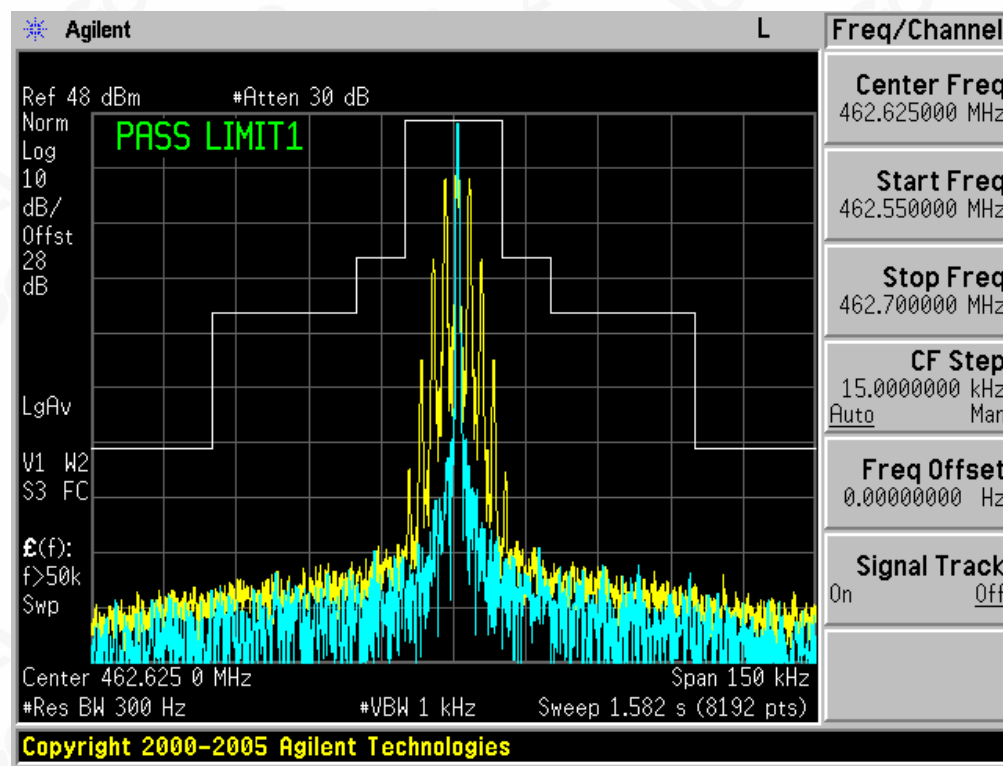

Attestation of Global Compliance

Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,  
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088


E-mail: agc@agc-cert.com

Service Hotline: 400 089 2118



CHANNEL 19:

The Worst Emission Mask for channel 19-45W-12.5K

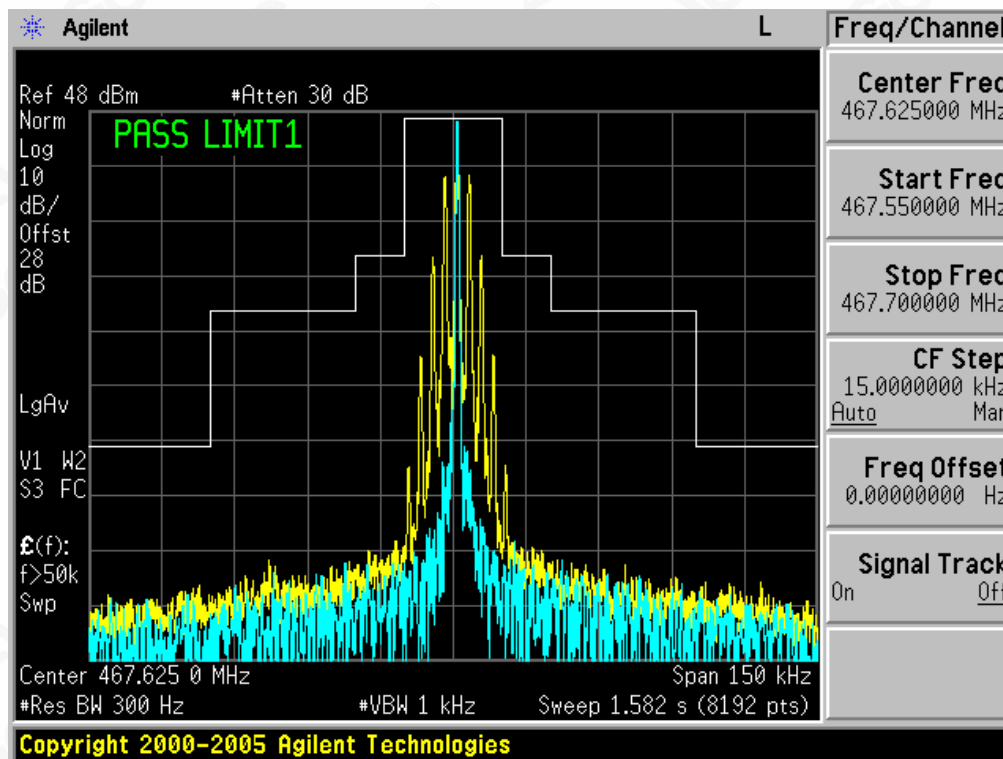

Attestation of Global Compliance

Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,  
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline: 400 089 2118

## 8. AUDIO LOW PASS FILTER RESPONSE

### 8.1.PROVISIONS APPLICABLE

§95.1775 GMRS modulation requirements

Audio filter. Each GMRS transmitter type must include audio frequency low pass filtering, unless it complies with the applicable paragraphs of §95.1779 (without filtering).


The filter must be between the modulation limiter and the modulated stage of the transmitter.

At any frequency ( $f$  in kHz) between 3 and 20 kHz, the filter must have an attenuation of at least  $60 \log(f/3)$  dB more than the attenuation at 1 kHz. Above 20 kHz, it must have an attenuation of at least 50 dB more than the attenuation at 1 kHz

### 8.2.TEST PROCEDURE


- (1) The DUT transmitter output port was connected to Modulation Analyzer.
- (2) Path loss for the measurement included.
- (3) Press 23.1SPCL on modulation analyzer to enable the external LO from Sigen.
- (4) Set the Sigen frequency to  $F_c + 1.5\text{MHz}$ , RF output level to 0dBm without modulation.
- (5) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 60% of the maximum deviation.
- (6) Up the amplitude by 20dB.
- (7) On DSA, get the reference point to 0dB.
- (8) Vary the frequency on audio analyzer from 3 kHz to 30 kHz, record the audio tone from DSA.

### 8.3 TEST CONFIGURATION

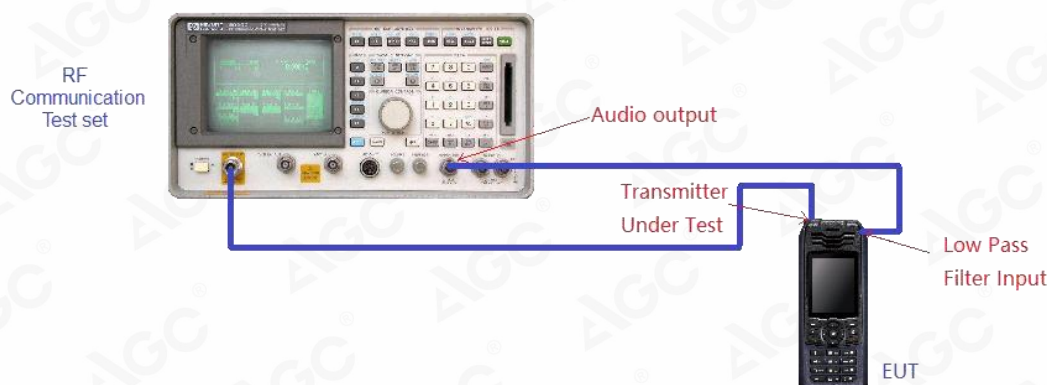

#### 8.4 TEST RESULT

Audio Frequency (kHz)	Response Attenuation (dB)	Limit (dB)
1	0	/
3	-1.73	0.00
4	-9.23	-7.50
5	-15.57	-13.31
6	-20.32	-18.06
7	-25.00	-22.08
8	-28.48	-25.56
9	-31.55	-28.63
10	-34.29	-31.37
15	-44.86	-41.94
20	-53.02	-50.00
30	-53.02	-50.00
50	-53.02	-50.00
70	-53.02	-50.00

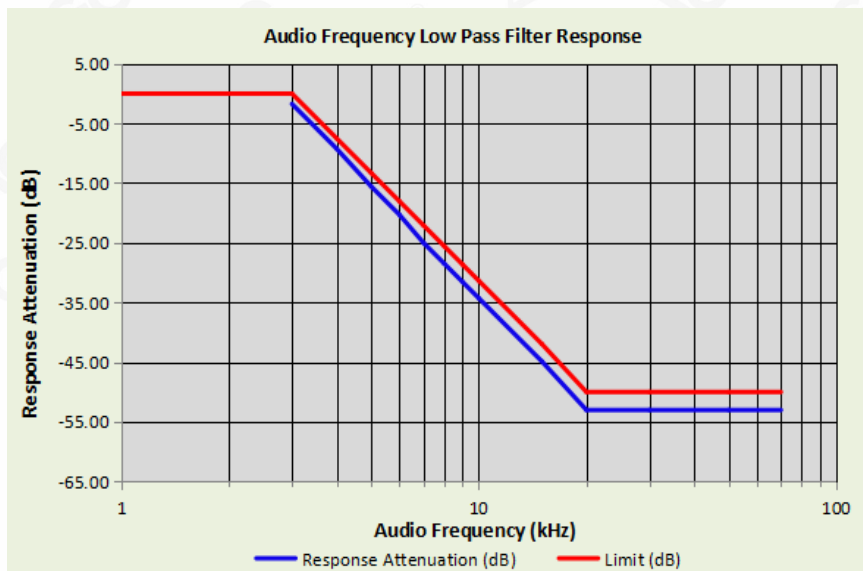

## 9. MAXIMUM TRANSMITTER POWER

### 9.1 PROVISIONS APPLICABLE

FCC Part 95.1767 For GMRS, the maximum permissible transmitter output power effective radiated power (e.r.p.) as follows.

This section contains transmitting power limits for GMRS stations. The maximum transmitting power depends on which channels are being used and the type of station.

(a)462/467 MHz main channels. The limits in this paragraph apply to stations transmitting on any of the 462 MHz main channels or any of the 467 MHz main channels. Each GMRS transmitter type must be capable of operating within the allowable power range. GMRS licensees are responsible for ensuring that their GMRS stations operate in compliance with these limits.

(1)The transmitter output power of mobile, repeater and base stations must not exceed 50 Watts.

(2)The transmitter output power of fixed stations must not exceed 15 Watts.

(b)462 MHz interstitial channels. The effective radiated power (ERP) of mobile, hand-held portable and base stations transmitting on the 462 MHz interstitial channels must not exceed 5 Watts.

(c)467 MHz interstitial channels. The effective radiated power (ERP) of hand-held portable units transmitting on the 467 MHz interstitial channels must not exceed 0.5 Watt. Each GMRS transmitter type capable of transmitting on these channels must be designed such that the ERP does not exceed 0.5 Watt.






## 9.2 TEST PROCEDURE

- (1) EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made. The radiated emission measurements of all transmit frequencies in all channels were measured with peak detector
- (2) A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver
- (3) The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=100kHz, VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).
- (4) The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
- (5) A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.  
The measurement results are obtained as described below:  $\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} - \text{Ga}$  The measurement results are amend as described below:  
 $\text{Power(EIRP)} = \text{PMea} - \text{Pcl} - \text{Ga}$
- (6) This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
- (7) ERP can be calculated from EIRP by subtracting the gain of the dipole,  $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$ .
- (8) Test the EUT in the lowest channel, the middle channel the Highest channel



### 9.3 TEST CONFIGURATION

#### Effective Radiated Power

#### Radiated Below 1GHz

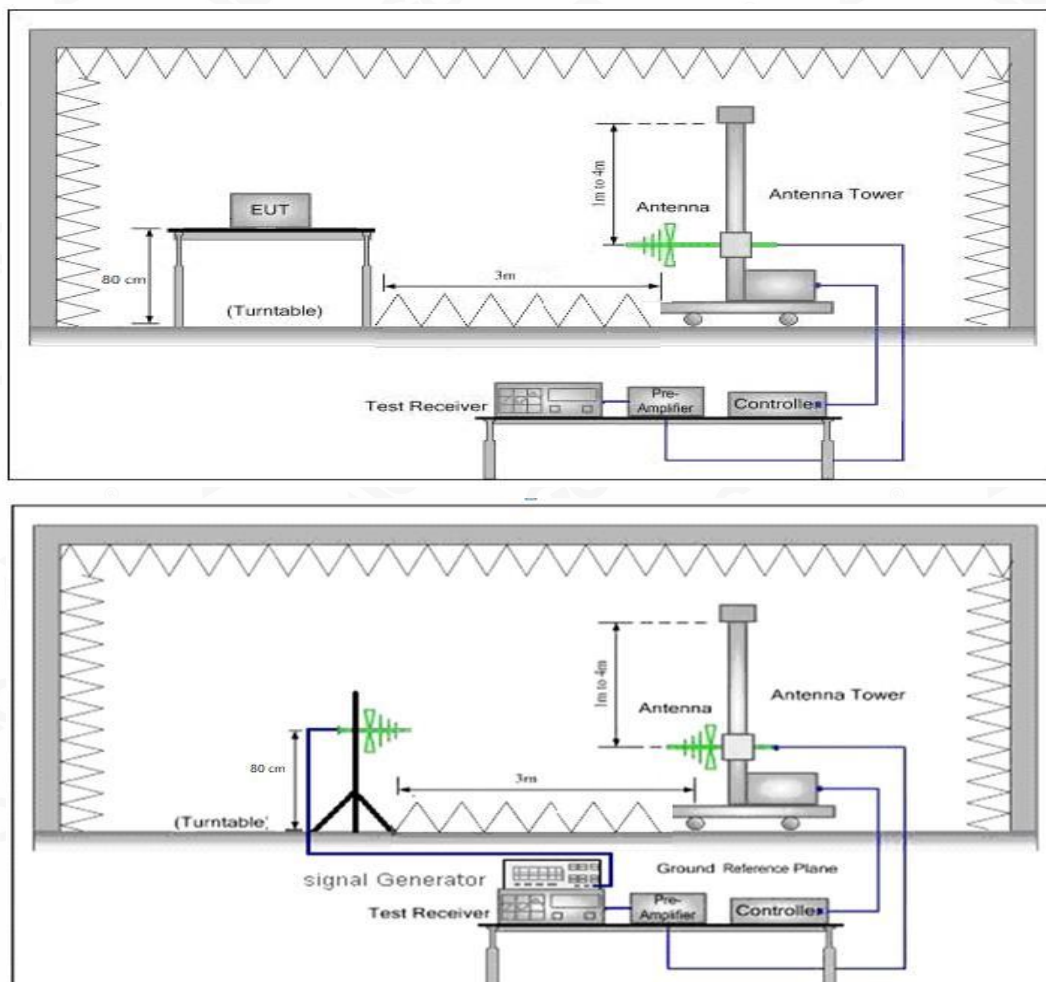

**Radiated Above 1 GHz**

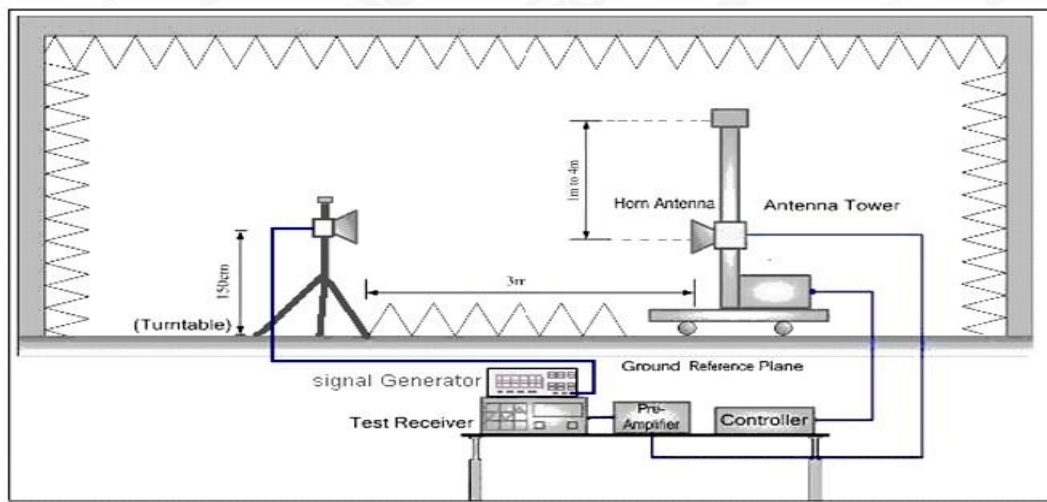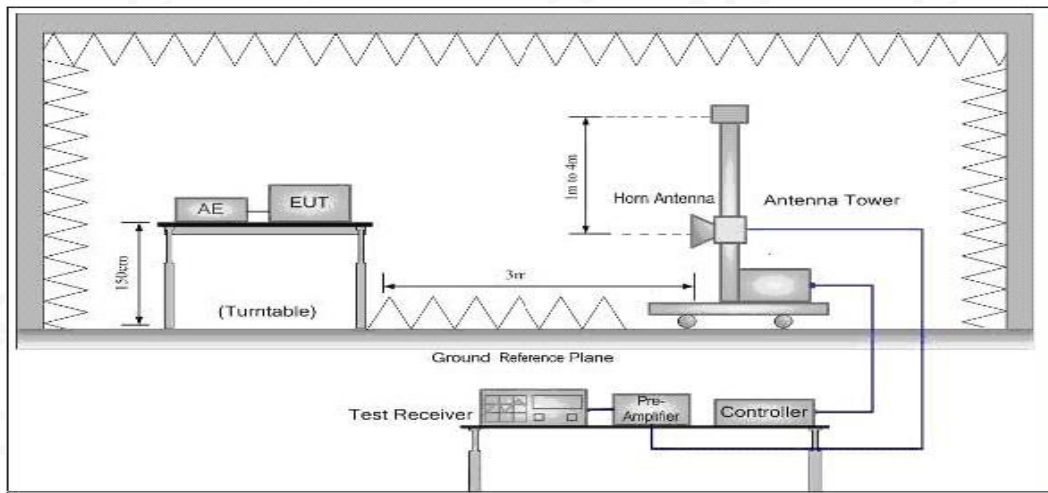



#### 9.4 TEST RESULT

The maximum Power (CP) for UHF is

Analog: 5W/45W for 12.5 KHz Channel Separation

Calculation Formula:  $CP = R + A + L$

\* Note:

CP: The final Conducted Power

R : The reading value from spectrum analyzer

A : The attenuation value of the used attenuator

L : The loss of all connection cables

#### ERP RESULT:

Frequency	Reading Level	Antenna	S.G.	Cable Loss	Ant.Gain	Emission Level	Emission Level	Limit	Margin
(MHz)	(dBuv/m)	Polarization	(dBm)	(dB)	(dBi)	(dBm)	(W)	(W)	(W)
ChannelSeparation:12.5KHz									
462.6375	127.99	V	30.61	0.38	6.60	36.83	4.82	5	0.18
462.6375	127.93	H	30.55	0.38	6.60	36.77	4.75	5	0.25
462.6250	137.65	V	40.27	0.38	6.60	46.49	44.57	50	5.43
462.6250	137.51	H	40.13	0.38	6.60	46.35	43.15	50	6.85
467.6250	137.61	V	40.23	0.38	6.60	46.45	44.16	50	5.84
467.6250	137.49	H	40.11	0.38	6.60	46.33	42.95	50	7.05

**Note:** The antenna will not be sold with the device, we test the power with Alternative method, added a 50Ω car antenna (mode:C-002) max gain: 0dBi) in the test.