



Test Report – FCC PART 15.236 LOW POWER
UNLICENSED WIRELESS MICROPHONE
Applicant: Wisycom s.r.l.

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA). This test report relates only to the items tested as identified and is not valid for any subsequent changes or modifications made to the equipment under test.



Table of Contents

1.	CUSTOMER INFORMATION.....	4
1.1	TEST RESULT SUMMARY	4
2.	LOCATION OF TESTING	5
2.1	TEST LABORATORY	5
2.2	TESTING WAS PERFORMED, REVIEWED BY	6
3.	TEST SAMPLE(S) (EUT/DUT)	7
3.1	DESCRIPTION OF THE EUT	7
3.2	CONFIGURATION OF EUT	8
3.3	TEST SETUP OF EUT	8
4.	TEST METHODS & APPLICABLE REGULATORY LIMITS.....	9
4.1	TEST METHODS/STANDARDS/GUIDANCE	9
5.	MEASUREMENT UNCERTAINTY	9
6.	ENVIRONMENTAL CONDITIONS	9
7.	LIST OF TEST EQUIPMENT AND TEST FACILITY	10
8.	TEST RESULTS	11
8.1	RF POWER OUTPUT	12
8.1.1	Test Data: RF Power Output Measurement Table, 470.075 MHz.....	13
8.1.2	Test Data: RF Power Output Measurement Table, 555.000 MHz.....	14
8.1.3	Test Data: RF Power Output Measurement Table, 607.925 MHz.....	15
8.1.4	Test Data: RF Power Output Measurement Table, 614.075 MHz.....	16
8.1.5	Test Data: RF Power Output Measurement Table, 615.925 MHz.....	17
8.1.6	Test Data: RF Power Output Measurement Table, 662.925 MHz.....	18
8.2	OCCUPIED BANDWIDTH	19
8.2.1	Test Data: 99% Occupied Bandwidth Measurement Plot, 470.075 MHz	20
8.2.2	Test Data: 99% Occupied Bandwidth Measurement Plot, 555.000 MHz	21
8.2.3	Test Data: 99% Occupied Bandwidth Measurement Plot, 607.925 MHz	22
8.2.4	Test Data: 99% Occupied Bandwidth Measurement Plot, 614.075 MHz.....	23
8.2.5	Test Data: 99% Occupied Bandwidth Measurement Plot, 615.925 MHz.....	24
8.2.6	Test Data: 99% Occupied Bandwidth Measurement Plot, 662.925 MHz	25
8.2.7	Test Data: 26dB Occupied Bandwidth Measurement Plot, 470.075 MHz	26
8.2.8	Test Data: 26dB Occupied Bandwidth Measurement Plot, 555.000 MHz	27
8.2.9	Test Data: 26dB Occupied Bandwidth Measurement Plot, 607.925 MHz	28
8.2.10	Test Data: 26dB Occupied Bandwidth Measurement Plot, 614.075 MHz.....	29
8.2.11	Test Data: 26dB Occupied Bandwidth Measurement Plot, 615.925 MHz.....	30
8.2.12	Test Data: 26dB Occupied Bandwidth Measurement Plot, 662.925 MHz	31
8.3	OCCUPIED BANDWIDTH (Mask)	32
8.3.1	Test Data: Emission Mask Plot, 470.075 MHz	33
8.3.2	Test Data: Emission Mask Plot, 555.000 MHz	34
8.3.3	Test Data: Emission Mask Plot, 607.925 MHz	35



8.3.4	Test Data: Emission Mask Plot, 614.075 MHz	36
8.3.5	Test Data: Emission Mask Plot, 615.925 MHz.....	37
8.3.6	Test Data: Emission Mask Plot, 662.925 MHz	38
8.4	RADIATED EMISSIONS.....	39
8.4.1	Radiated Emissions Table, 470.075 MHz	40
8.4.2	Radiated Emissions Table, 555.000 MHz	41
8.4.3	Radiated Emissions Table, 607.925 MHz	42
8.4.4	Radiated Emissions Table, 614.075 MHz	43
8.4.5	Radiated Emissions Table, 615.925 MHz.....	44
8.4.6	Radiated Emissions Table, 662.925 MHz	45
9.	ANNEX-A - PHOTOGRAPHS OF THE EUT.....	46
10.	ANNEX-B – TEST SETUP PHOTOGRAPHS.....	46
11.	HISTORY OF TEST REPORT CHANGES	46



Timco Engineering, Inc., an IIA Company
13146 NW 86th Drive, Suite 400, Alachua, Florida 32615
(352) 472-5500 / testing@industrial-ia.com

1. Customer Information

Applicant: Wisycom s.r.l.
Address: Via Tiepolo, 7/E
Tombolo, 35019, Italy

1.1 Test Result Summary

The following test procedure was used ANSI C63.10. Full test results are available in this report.

No additions to the test methods were needed. There were no deviations, or exclusions from the test methods. No test results are from external providers or from the customer. The test results relate only to the items tested. Timco does not offer opinions and interpretations, only a pass/fail statement.

Applicable Clauses from Part 15.236		
FCC Clauses	Description of the requirements	Result: (Pass, Fail, N/A)
15.236 (c) (1) – (6)	Permissible Frequency Bands	Pass
15.236 (d) (1) – (2)	Maximum Radiated Power	Pass
15.236 (f) (1) – (2)	Channel Aggregation & Bandwidth	Pass
15.236 (f) (3)	Frequency Tolerance	Pass
15.236 (g)	Radiated Emissions, In-band	Pass

Other Applicable Clauses from Part 2 and Part 15 Subpart C		
FCC Clauses	Description of the requirements	Result: (Pass, Fail, N/A)
15.203	Antenna requirements	Pass
15.205	Restricted bands of operation	Pass
15.207	AC Power Conducted Emissions	n/a
15.209	Radiated Emissions, Out-of-band	Pass
15.211	Tunnel Radio Systems	n/a
15.212 (a)	Single Modular Transmitter	n/a
15.212 (b)	Limited Modular Transmitter	n/a
15.213	Cable Locating Equipment	n/a
15.214	Cordless Telephones	n/a



Timco Engineering, Inc., an IIA Company
13146 NW 86th Drive, Suite 400, Alachua, Florida 32615
(352) 472-5500 / testing@industrial-ia.com

2. Location of Testing

2.1 Test Laboratory

Timco Engineering Inc. is a subsidiary of Industrial Inspection & Analysis, Inc. ("IIA"). Testing was performed at Timco's permanent laboratory located at 849 NW State Road 45, Newberry, Florida 32669

FCC test firm # 578780

FCC Designation # US1070

FCC site registration is under A2LA certificate # 0955.01

ISED Canada test site registration # 2056A

EU Notified Body # 1177

For all designations see A2LA scope # 0955.01



Timco Engineering, Inc., an IIA Company
13146 NW 86th Drive, Suite 400, Alachua, Florida 32615
(352) 472-5500 / testing@industrial-ia.com

2.2 Testing was performed, reviewed by

Dates of Testing: 11/18/2024-11/29/2024

Signature:

Sr. EMC Engineer
EMC-003838-NE



Name & Title:

Tim Royer, Lab Manager

Date of Signature

2/6/2025



3. Test Sample(s) (EUT/DUT)

The test sample was received: 11/15/2024

3.1 Description of the EUT

A description as well as unambiguous identification of the EUT(s) tested. Where more than one sample is required for technical reasons (such as the use of connected units for the purpose of conducted output power testing where the product units will have integral antennas), each specific test shall identify which unit was tested.

Identification	
FCC ID:	POUMTH610
Brief Description	Handheld microphone transmitter
Model(s) #	MTH610
Firmware version	V1.0
Serial Number	39900005

Technical Characteristics	
Technology	Wireless Microphone
Frequency Range	470-608 MHz, 614-616 MHz, 657-663 MHz
Modulation	FM
Number of Channels	10
Duty Cycle	100%
Antenna Connector	SSMA
Voltage Rating (AC or Batt.)	Battery, 3.7V

Antenna Characteristics			
Antenna	Frequency Range	Mode / BW	Antenna Gain
1	470-663 MHz +	Transmit	0.8 dBi
1	940-1075 MHz	Transmit	0.8 dBi



3.2 Configuration of EUT

Band (MHz)	Mode	Number of Ant.
470-608	Transmit	1
614-616	Transmit	1
657-663	Transmit	1

Operating conditions during Testing:

No modifications of the device under test (including firmware, specific software settings, and input/output signal levels to the EUT).

Peripherals used during Testing:

No peripherals used.

3.3 Test Setup of EUT

Equipment, antenna, and cable arrangement. The setup of the equipment and cable or wire placement on the test site that produces the highest radiated and the highest ac power-line conducted emissions shall be shown clearly and described. Information on the orientation of portable equipment during testing shall be included. Drawings or photographs may be used for this purpose.

Test Setups are included in the test report.



4. Test methods & Applicable Regulatory Limits

4.1 Test methods/Standards/Guidance

The measurement was performed as per ANSI C63.10. Full test results are available in this report.

Limits and Regulatory Limits:

- 1) FCC Part 15.236

5. Measurement Uncertainty

Parameter	Uncertainty (dB)
Conducted Emissions	± 3.14 dB
Radiated Emissions (9kHz – 30 MHz)	± 3.08 dB
Radiated Emissions (30 – 200 MHz)	± 2.16 dB
Radiated Emissions (200 – 1000 MHz)	± 2.15 dB
Radiated Emissions (1 GHz – 18 GHz)	± 2.14 dB
Radiated Emissions (18 GHz – 40 GHz)	± 2.31 dB
Note: The uncertainties provided in this table represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of K=2.	

6. Environmental Conditions

Temperature & Humidity

Measurements performed at the test site did not exceed the following:

Parameter	Measurement
Temperature	23 C +/- 5%
Humidity	55% +/- 5%
Barometric Pressure	30.05 in Hg
Note: Specific environmental conditions that are applicable to a specific test are available in the test result section.	



7. List of Test Equipment and Test Facility

The test equipment used identified by type, manufacturer, serial number, or other identification and the date on which the next calibration or service check is due.

Description of the firmware or software used to operate EUT for testing purposes.

A complete list of all test equipment used shall be included with the test report. The manufacturer's model and serial numbers, and date of last calibration, and calibration interval shall be included. Measurement cable loss, measuring instrument bandwidth and detector function, video bandwidth, if appropriate, and antenna factors shall also be included where applicable.

List of Test Equipment

Type	Device	Manufacturer	Model	SN#	Current Cal	Cal Due
Antenna	Biconical 1057	Eaton	94455-1	1057	10/27/24	10/27/27
Antenna, NSA	Log-Periodic 1243	Eaton	96005	1243	10/27/24	10/27/27
Antenna	Double-Ridged Horn/ETS Horn 1	ETS-Lindgren	3117	00035923	10/27/24	10/27/27
Receiver	EMI Test Receiver R&S ESU 40	Rohde & Schwarz	ESU 40	100320	10/27/24	10/27/27
Signal Generator	Signal Generator HP 8648C	HP	8648C	35537A01679	03/29/19	8/03/2025

Software			
Software	Author	Version	Validation on
ESU Firmware	Rohde & Schwarz	4.43 SP3; BIOS v5.1-24-3	2018
RSCCommander	Rohde & Schwarz	1.6.4	2014
ScopeExplorer	LeCroy	v2.25.0.0	2009
Field Strength	Timco	v4.10.7.0	2016



8. Test Results

The results of the test are usually indicated in the form of tables, spectrum analyzer plots, charts, sample calculations, as appropriate for each test procedure.

A description and/or a block diagram of the test setup is usually provided.


The measurement results, along with the appropriate limits for comparison, may be presented in tabular or graphical form. In addition, any variation in the measurement environment may be reported if applicable (e.g., a significant change of temperature that could affect the cable loss and amplifier response).

Units of measurement

Unless noted otherwise in the referenced standard, the measurements of ac power-line conducted emissions and conducted power output will be reported in units of dB μ V. Unless noted otherwise in the referenced standard, the measurements of radiated emissions will be reported in units of decibels, referenced to one microvolt per meter (dB μ V/m) for electric fields, or to one ampere per meter (dBA/m) for magnetic fields, at the distance specified in the appropriate standards or requirements. The measurements of antenna-conducted power for receivers may be reported in units of dB μ V if the impedance of the measuring instrument is also reported. Otherwise, antenna-conducted power will be reported in units of decibels referenced to one milliwatt (dBm). All formulas for data conversions and conversion factors, if used, will be included in this measurement report.

8.1 RF POWER OUTPUT


Limits from Part 2.1046 ,15.236 (d) (1) and test procedure from ANSI C63.10.

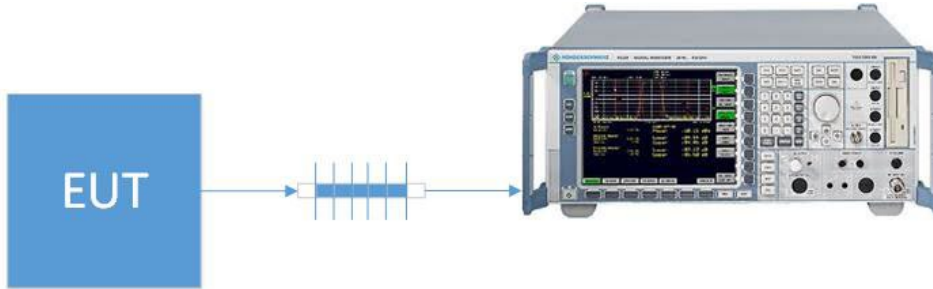

Test Results					
Tuned Frequency (MHz)	Power Output (dBm)	Power Output (W)	Gain	EIRP Power Output (dBm)	Limit EIRP
470.075	15.87	0.039	0.8	16.67	50
555.000	15.83	0.038	1.0	16.83	50
607.925	15.75	0.037	1.0	16.75	50
614.075	10.81	0.012	1.0	11.81	20
615.925	10.77	0.012	1.0	11.77	20
662.925	11.44	0.014	1.0	12.44	20




8.1.1 Test Data: RF Power Output Measurement Table, 470.075 MHz

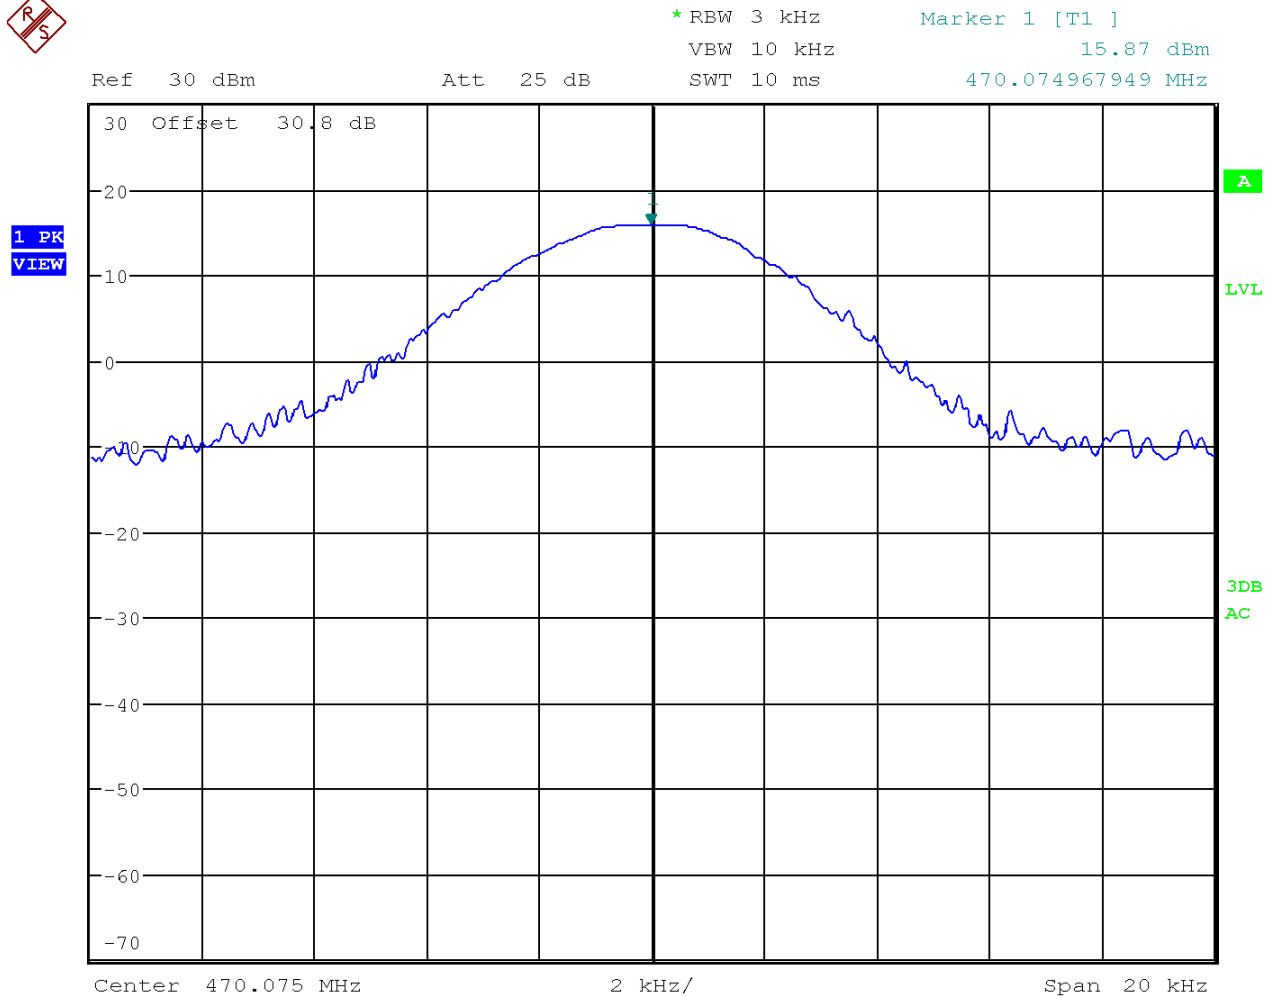

Date: 19.NOV.2024 09:58:45




8.1.2 Test Data: RF Power Output Measurement Table, 555.000 MHz

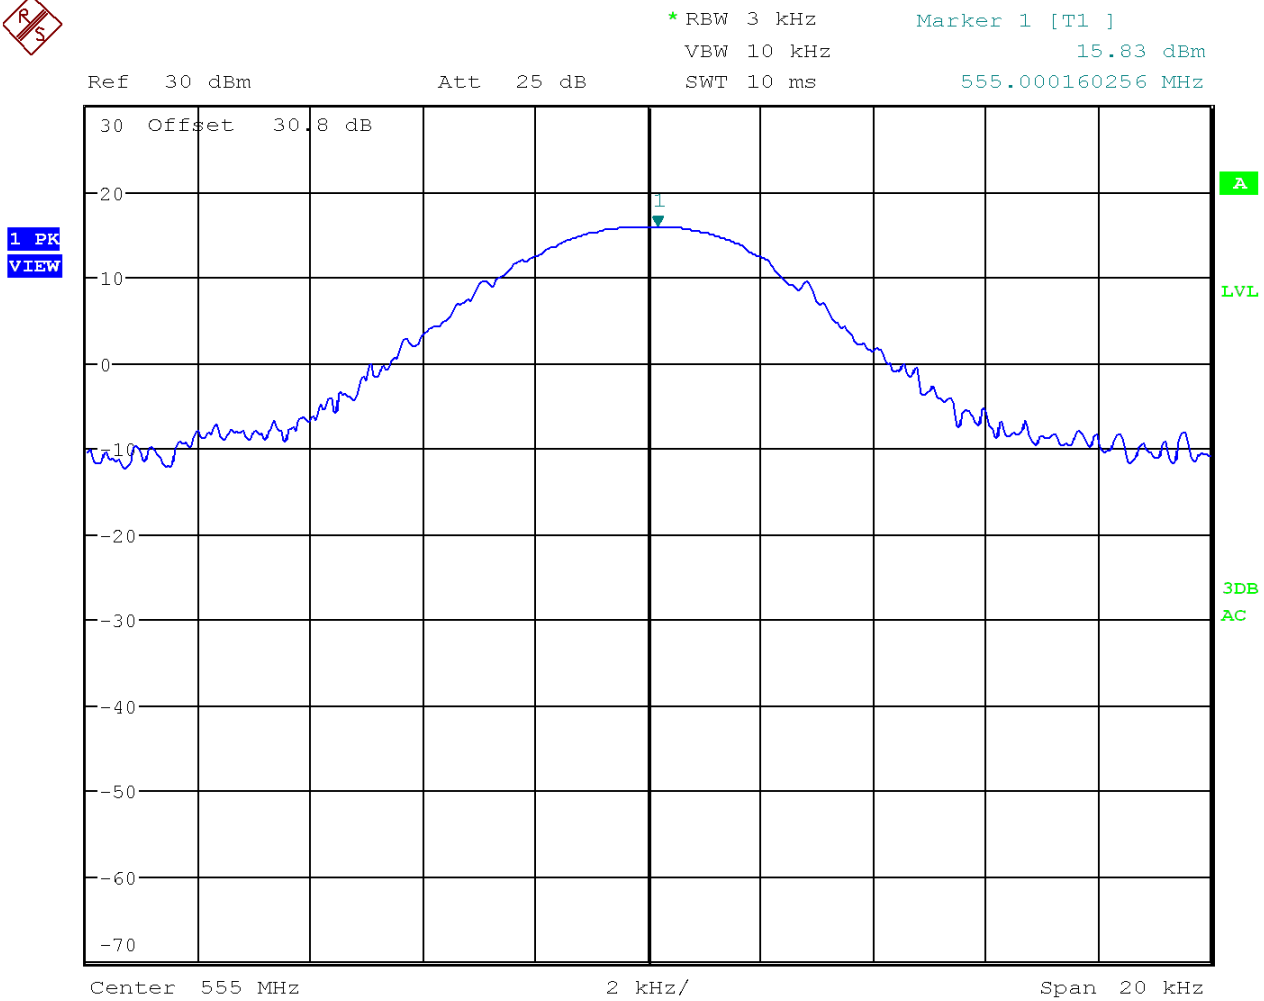

Date: 19.NOV.2024 10:00:01




8.1.3 Test Data: RF Power Output Measurement Table, 607.925 MHz

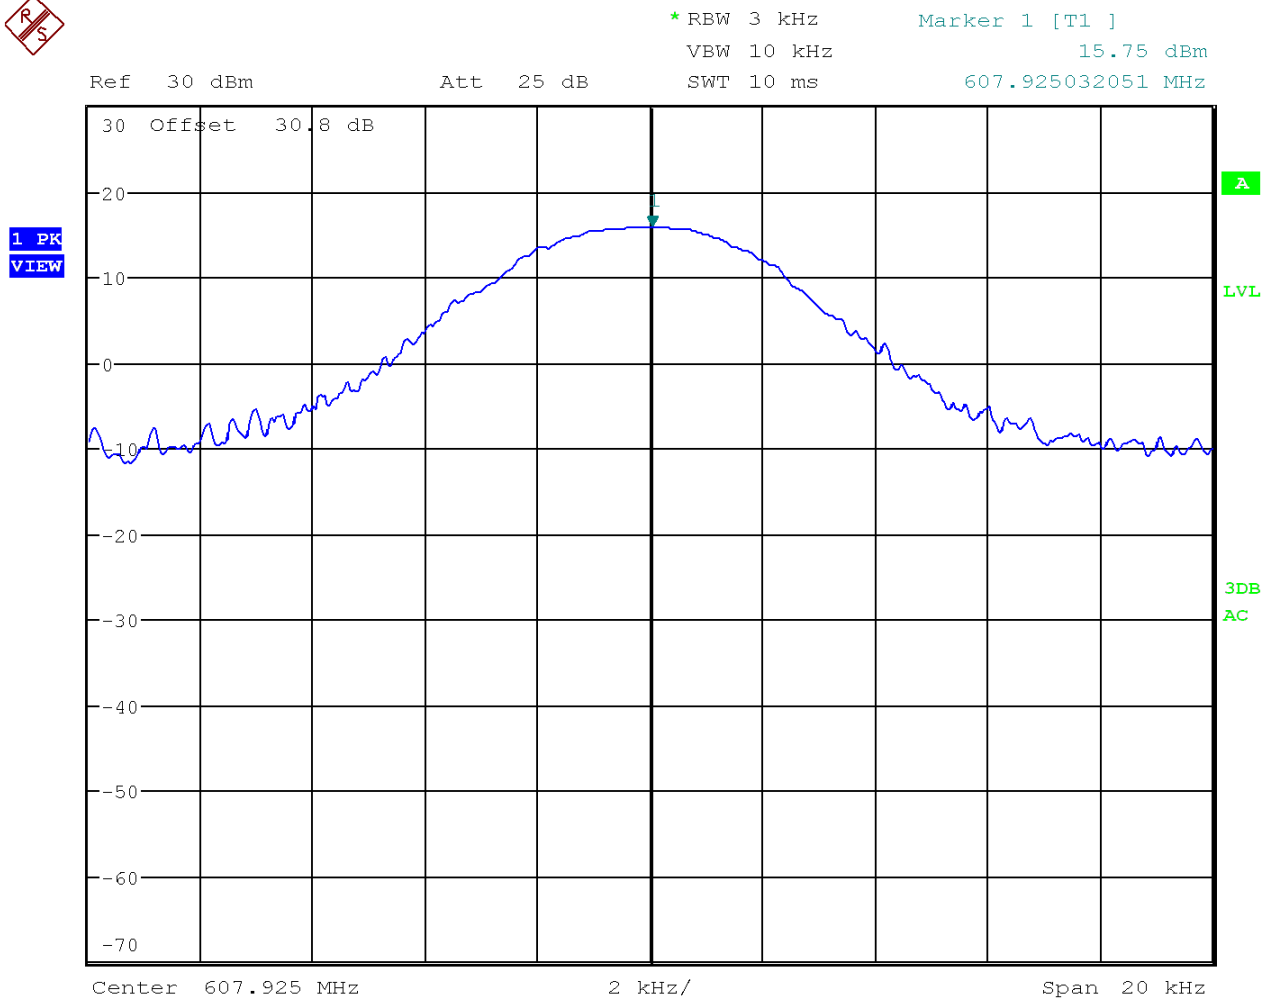

Date: 19.NOV.2024 10:01:15




8.1.4 Test Data: RF Power Output Measurement Table, 614.075 MHz

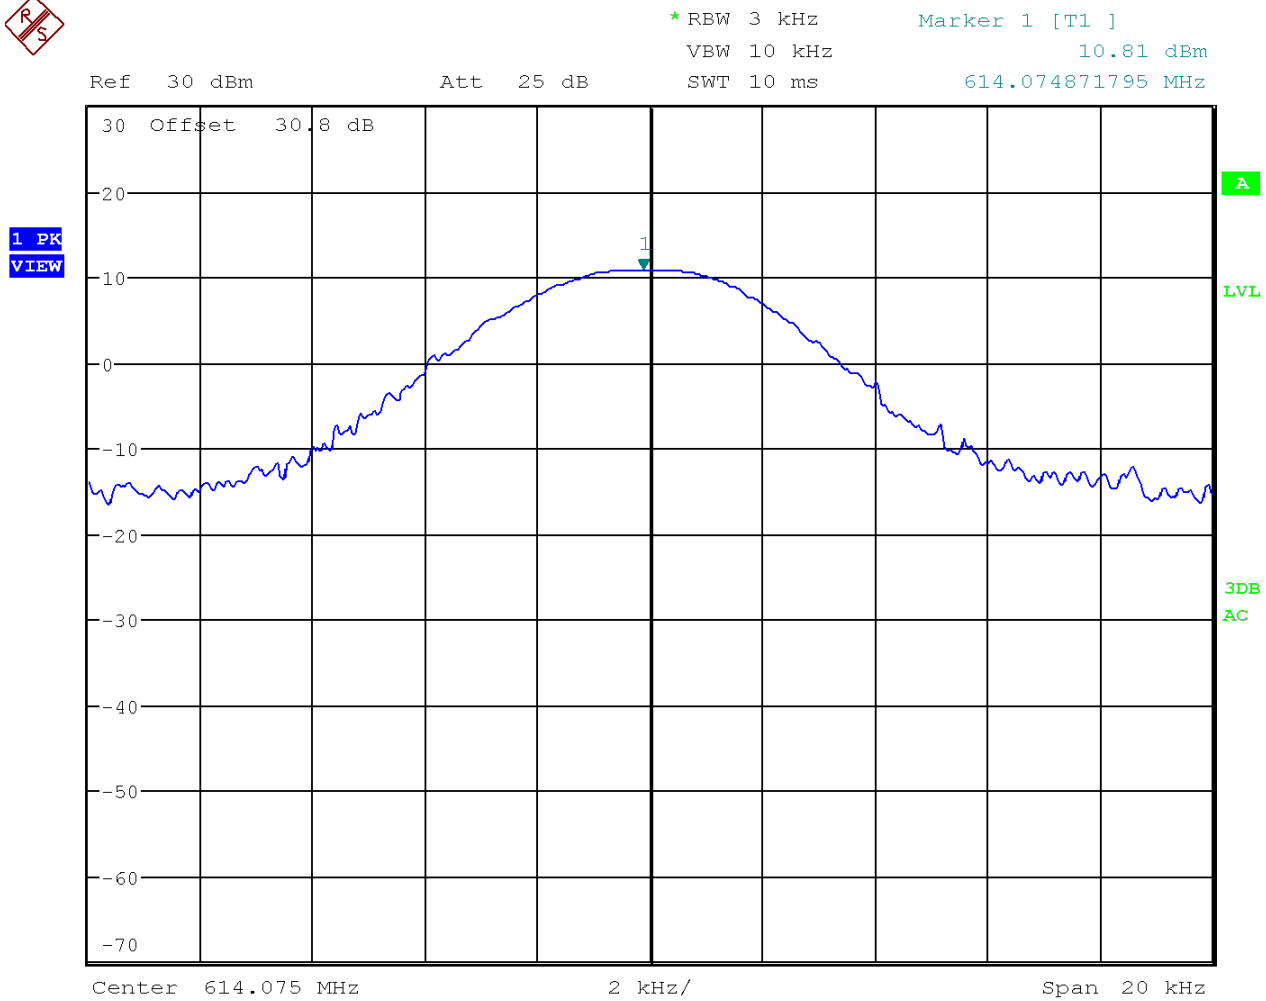

Date: 19.NOV.2024 11:29:24




8.1.5 Test Data: RF Power Output Measurement Table, 615.925 MHz

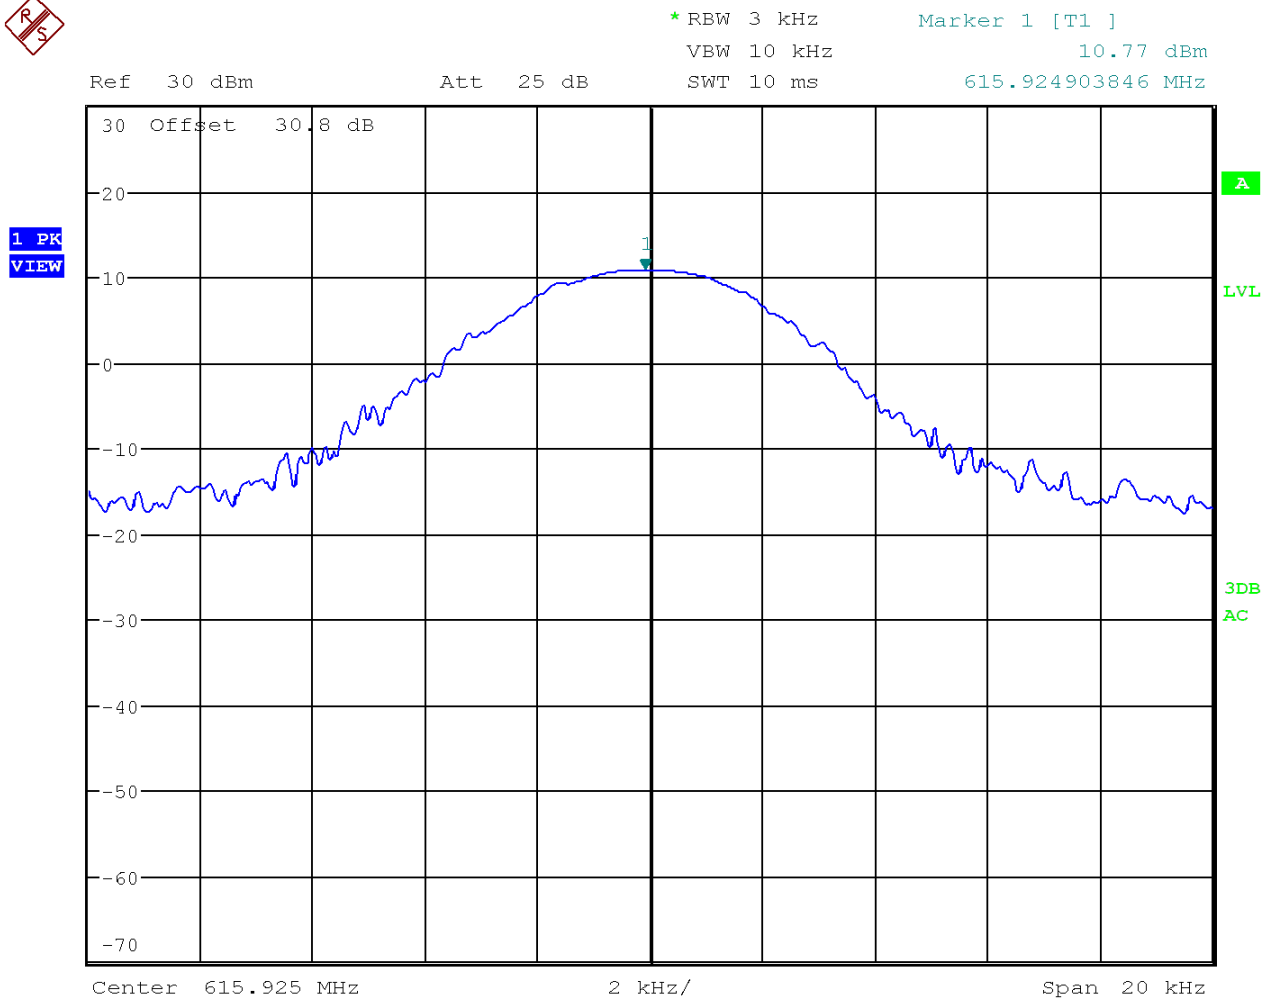

Date: 19.NOV.2024 11:29:58




8.1.6 Test Data: RF Power Output Measurement Table, 662.925 MHz

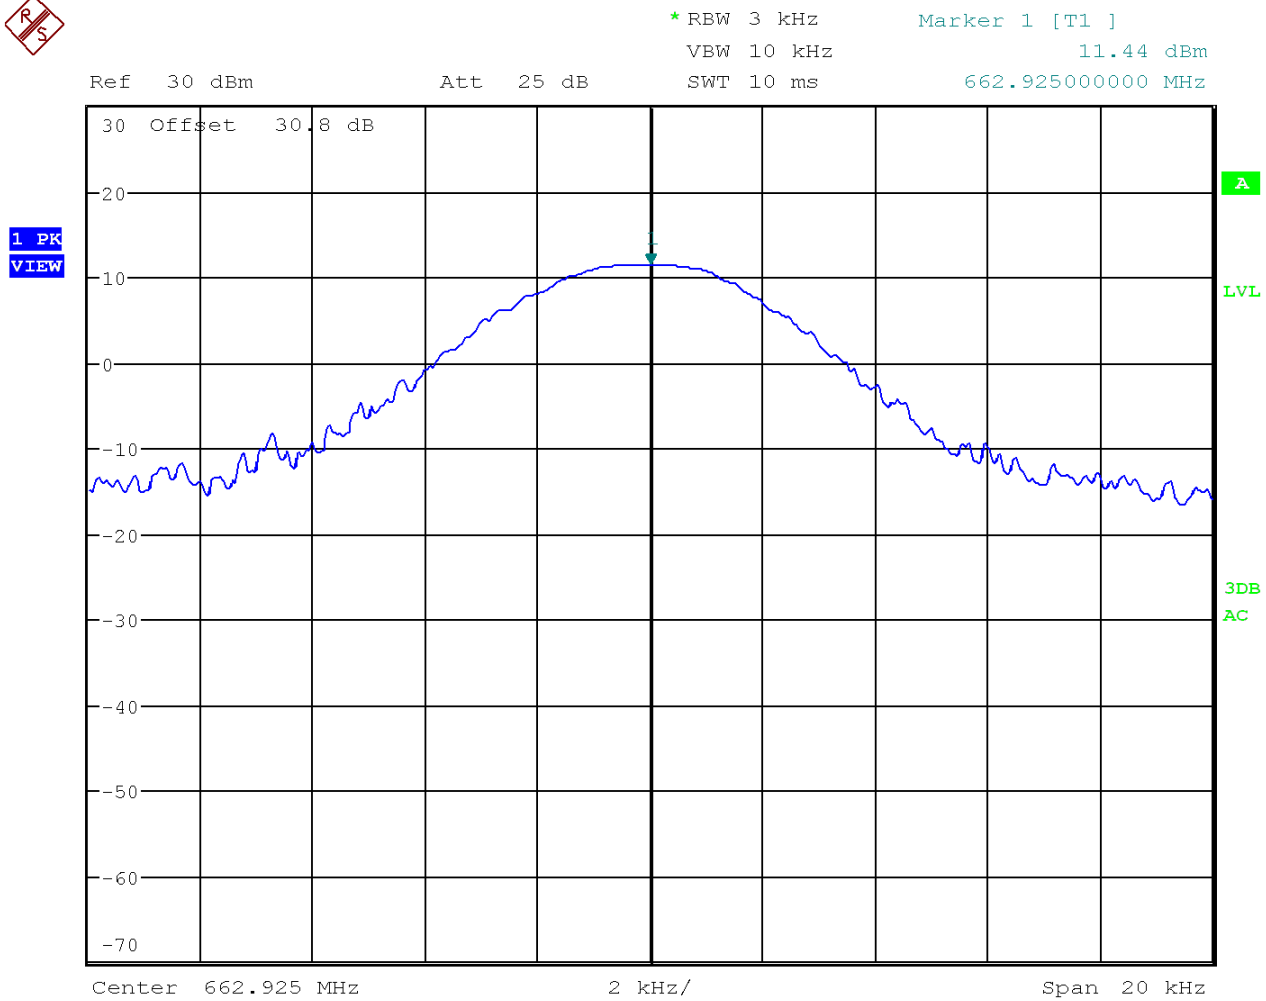

Date: 19.NOV.2024 11:30:55


8.2 OCCUPIED BANDWIDTH

Limits from Part 2.1046 ,15.236 and test procedure from ANSI C63.10.

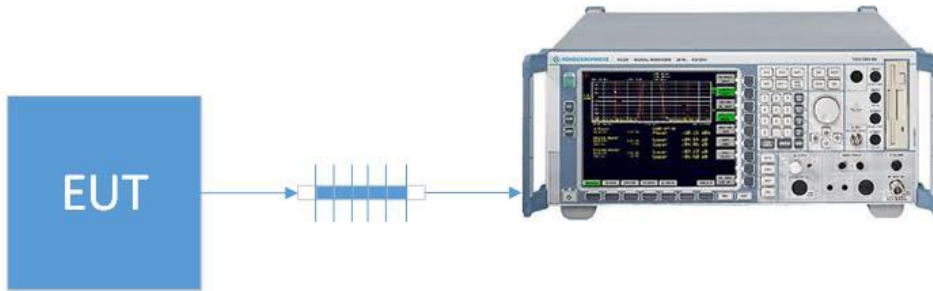


Tuned Frequency (MHz)	99% BW (kHz)
470.075	130.81
555.000	131.51
607.925	133.69
614.075	132.39
615.925	133.15
662.925	130.17

8.2.1 Test Data: 99% Occupied Bandwidth Measurement Plot, 470.075 MHz

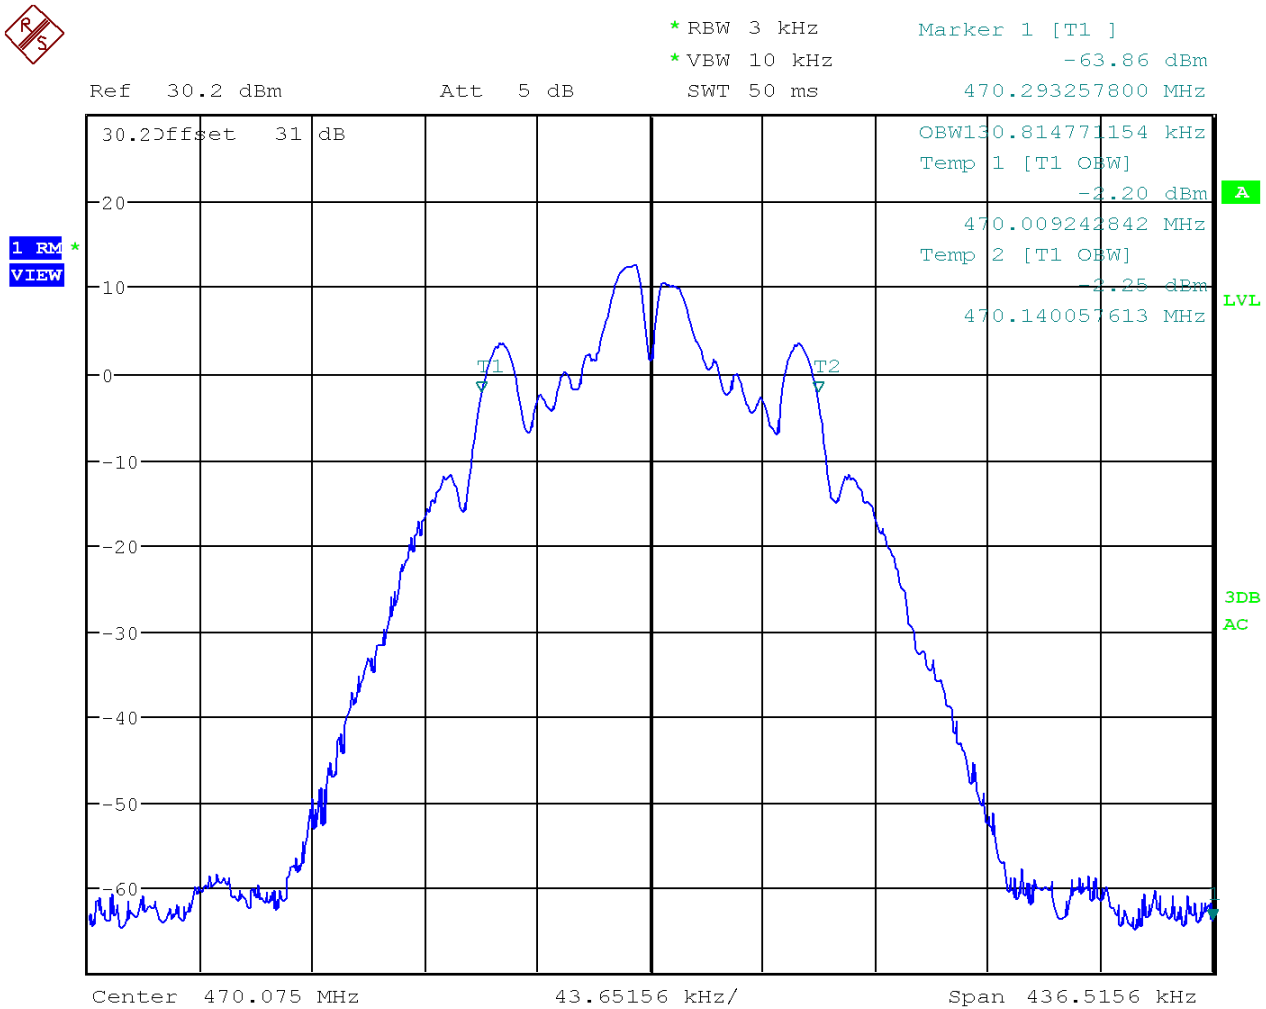


Date: 19.NOV.2024 12:34:28

8.2.2 Test Data: 99% Occupied Bandwidth Measurement Plot, 555.000 MHz

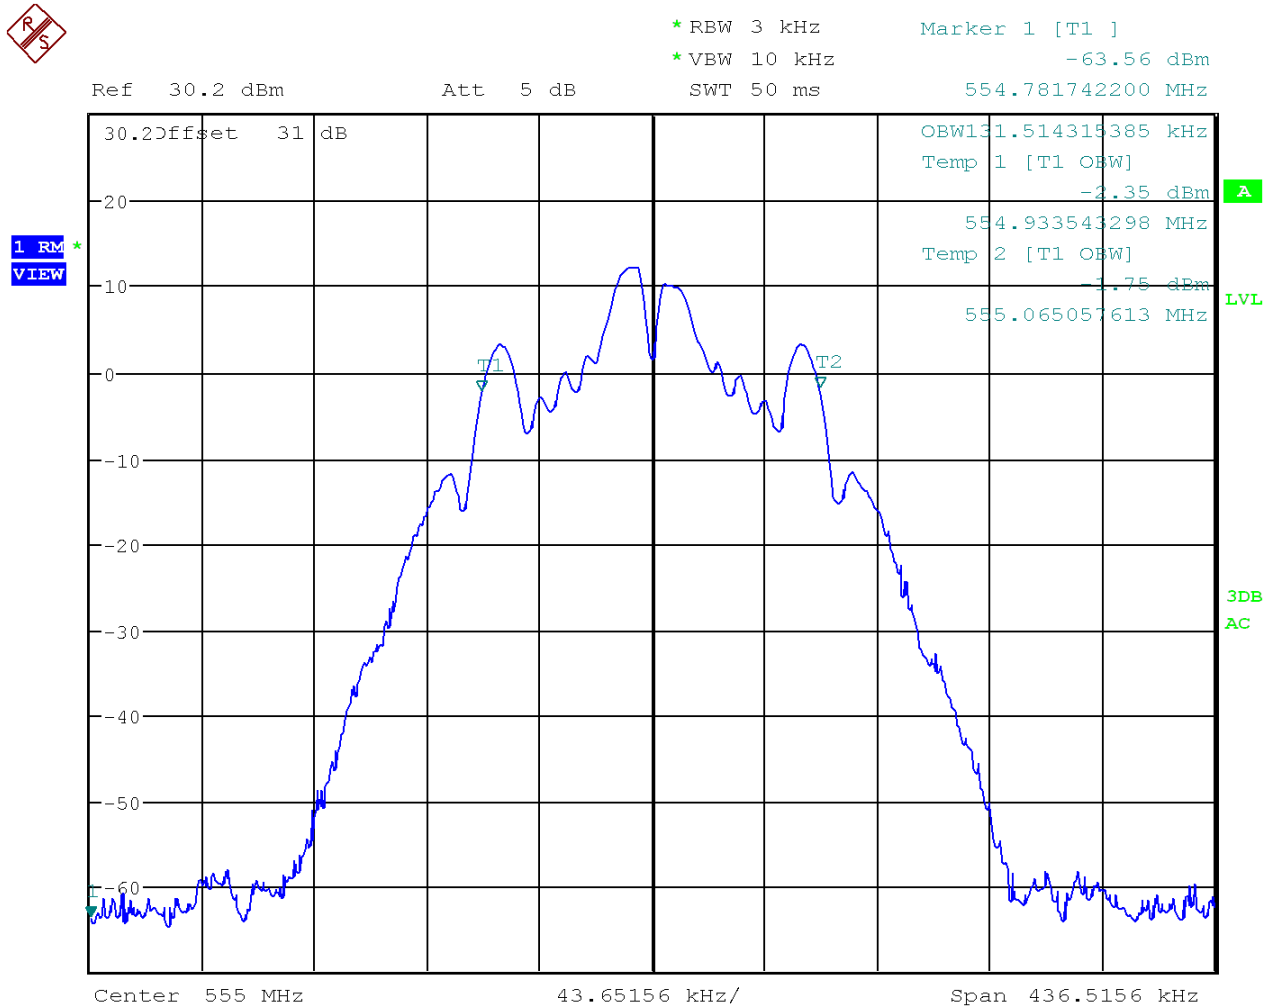

Date: 19.NOV.2024 12:38:00


8.2.3 Test Data: 99% Occupied Bandwidth Measurement Plot, 607.925 MHz

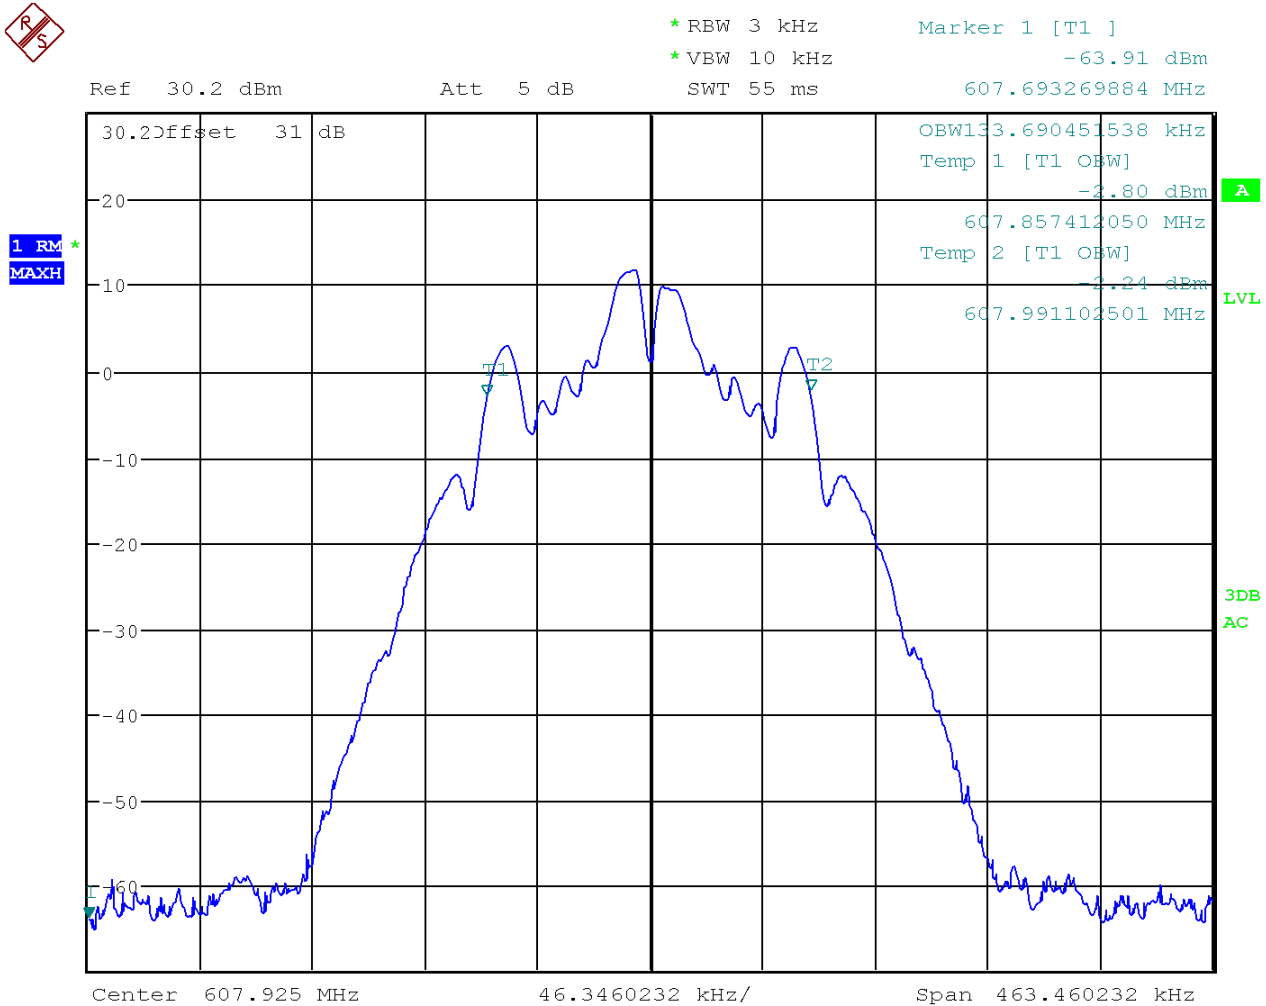

Date: 19.NOV.2024 13:48:02




8.2.4 Test Data: 99% Occupied Bandwidth Measurement Plot, 614.075 MHz

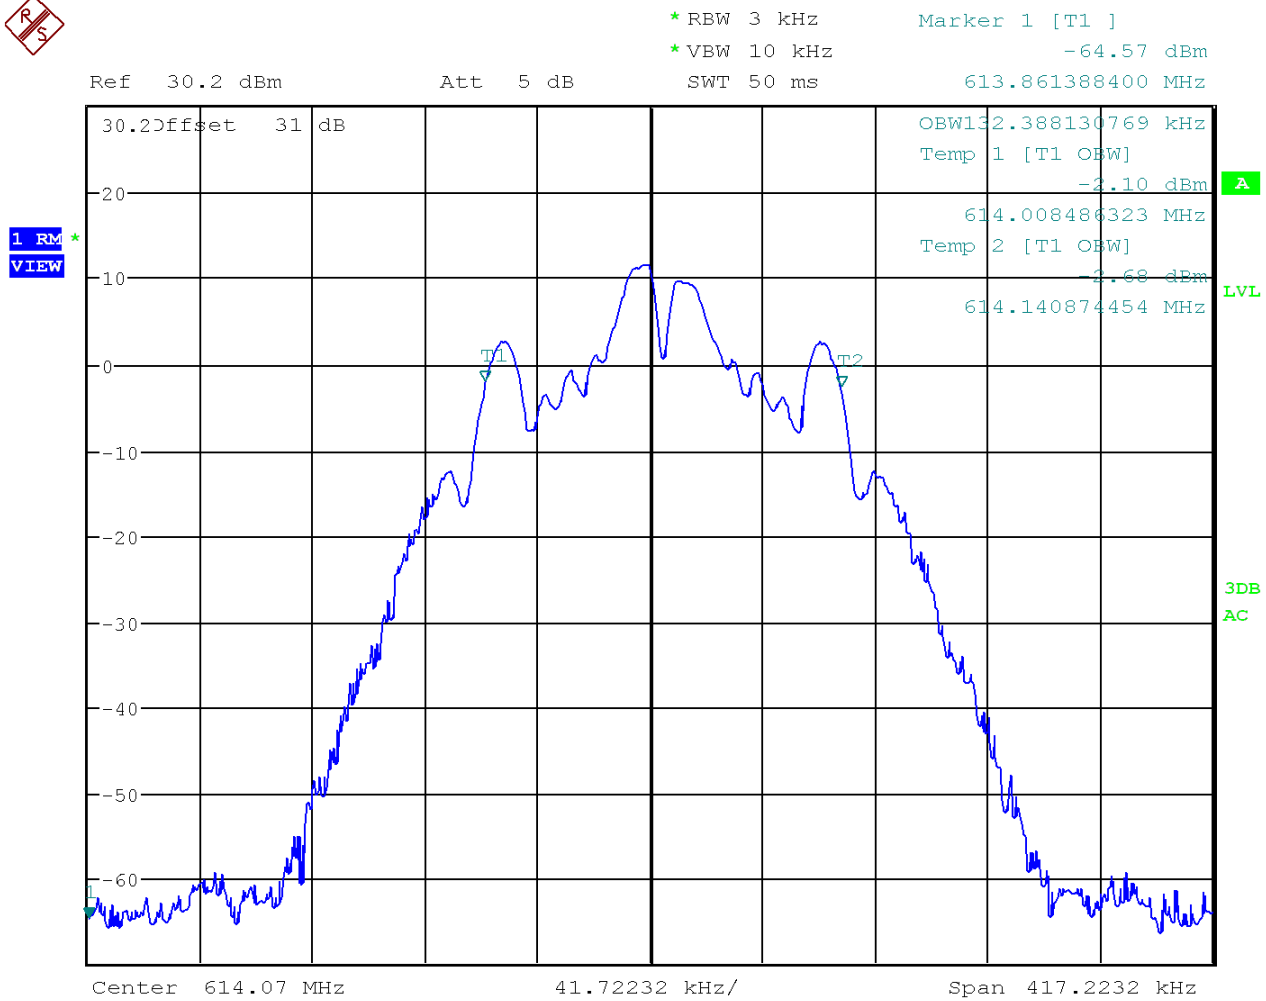

Date: 19.NOV.2024 13:52:38



8.2.5 Test Data: 99% Occupied Bandwidth Measurement Plot, 615.925 MHz

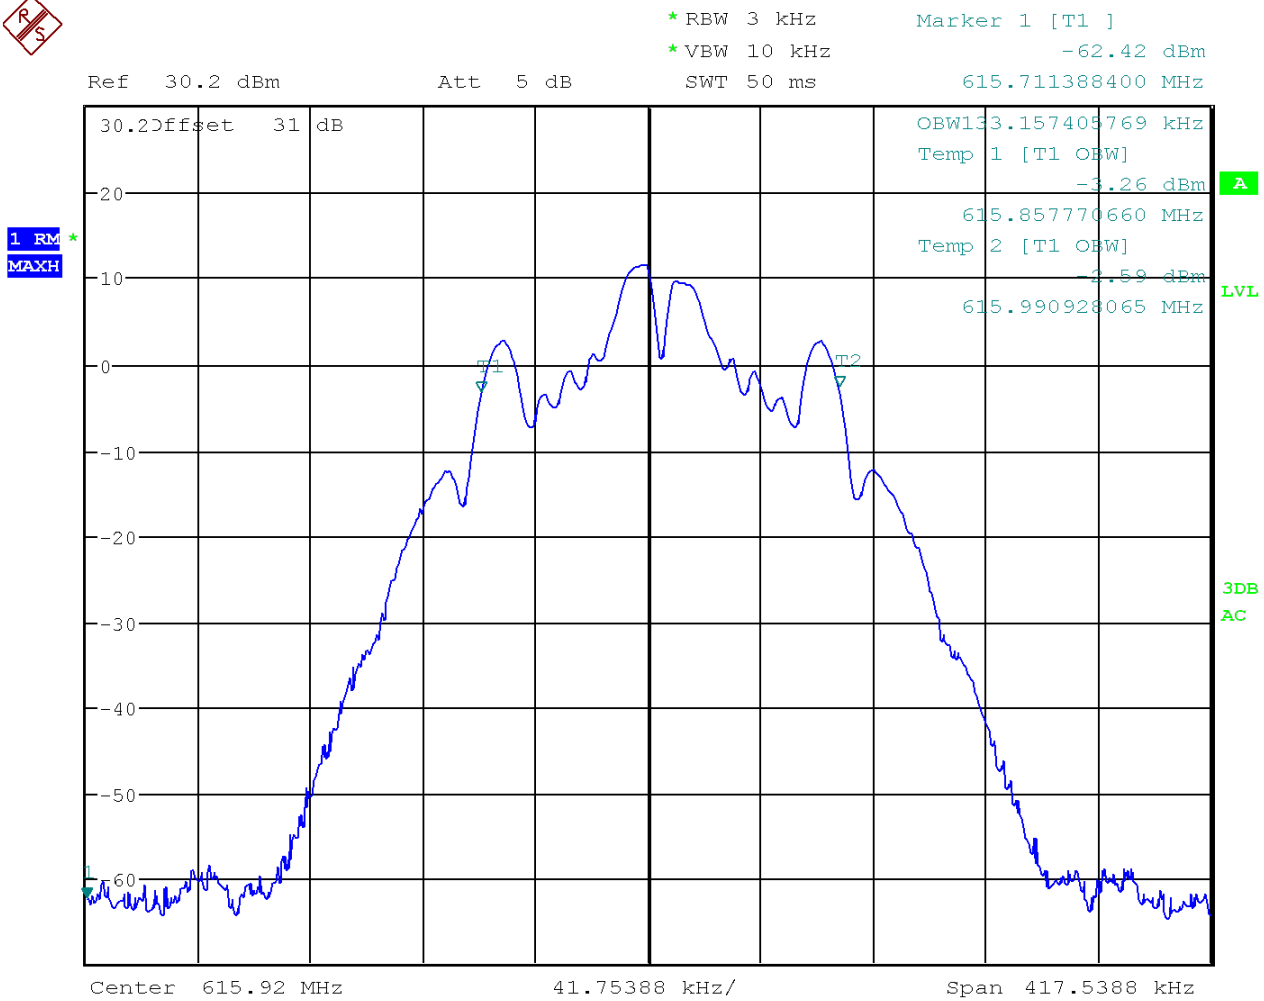

Date: 19.NOV.2024 13:54:59

8.2.6 Test Data: 99% Occupied Bandwidth Measurement Plot, 662.925 MHz



* RBW 3 kHz
 * VBW 10 kHz
 Marker 1 [T1]
 -62.01 dBm
 662.718834300 MHz


Ref 30.2 dBm

Att 5 dB

SWT 50 ms

662.718834300 MHz


1 RM
 VIEW

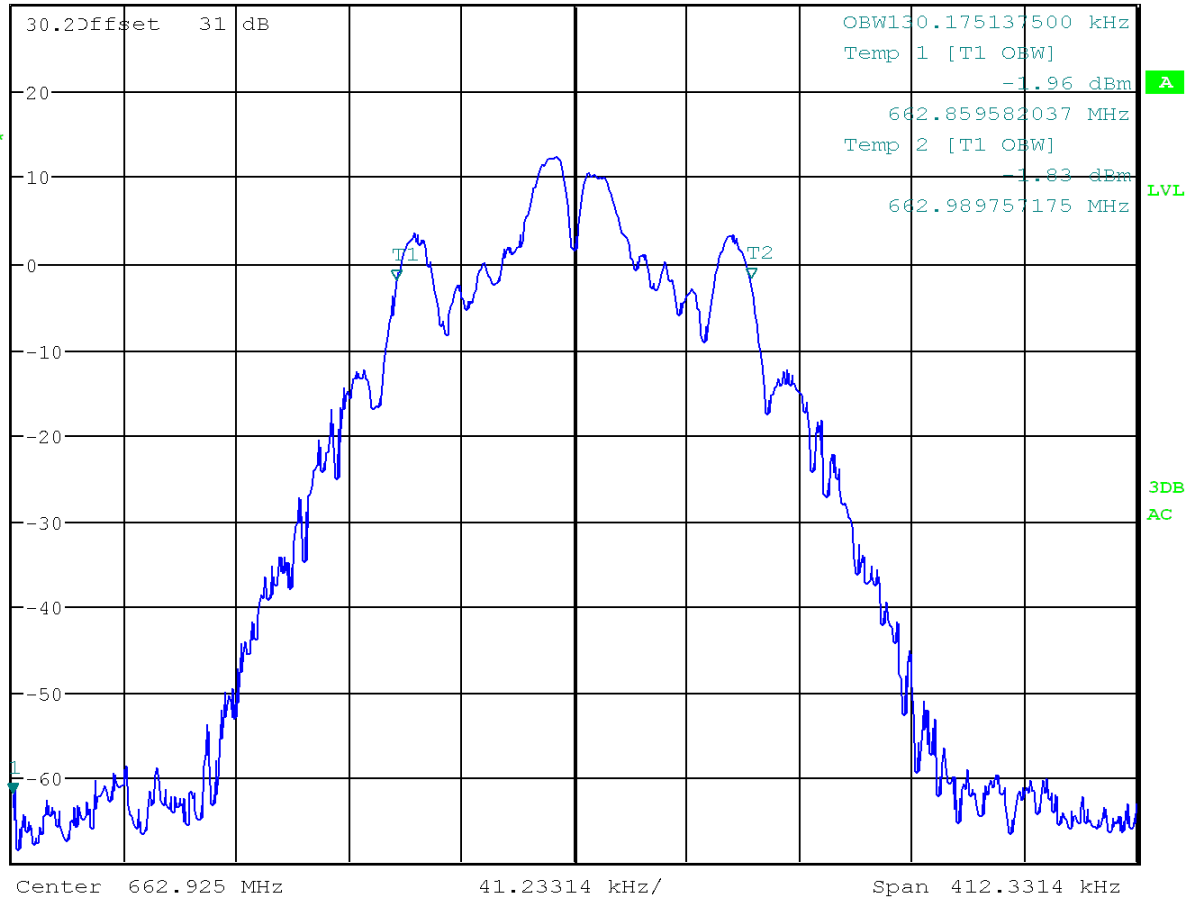

Date: 19.NOV.2024 13:58:28




8.2.7 Test Data: 26dB Occupied Bandwidth Measurement Plot, 470.075 MHz

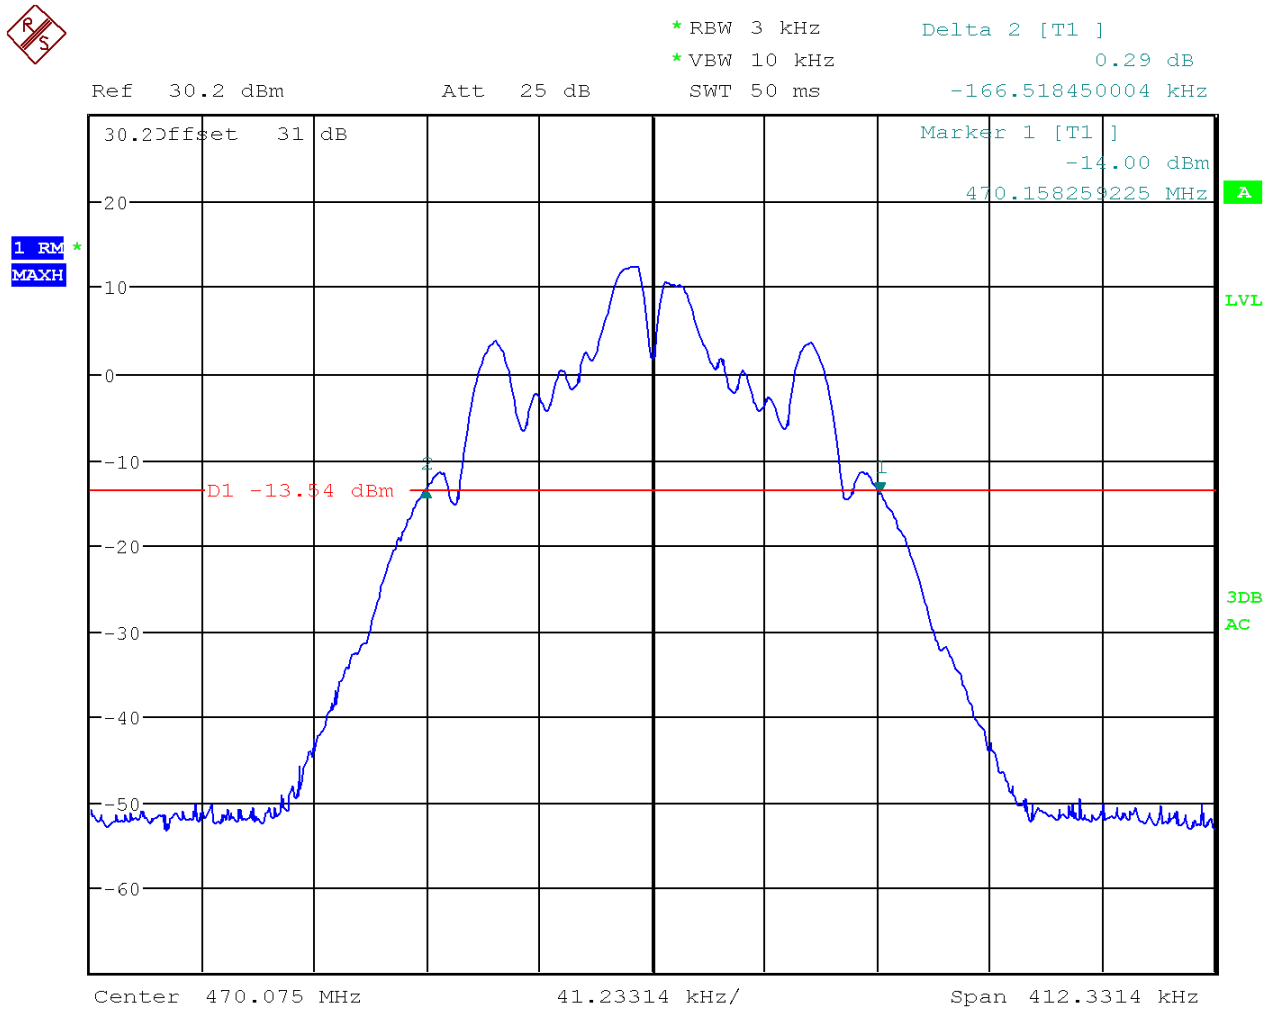

Date: 19.NOV.2024 15:02:12




8.2.8 Test Data: 26dB Occupied Bandwidth Measurement Plot, 555.000 MHz

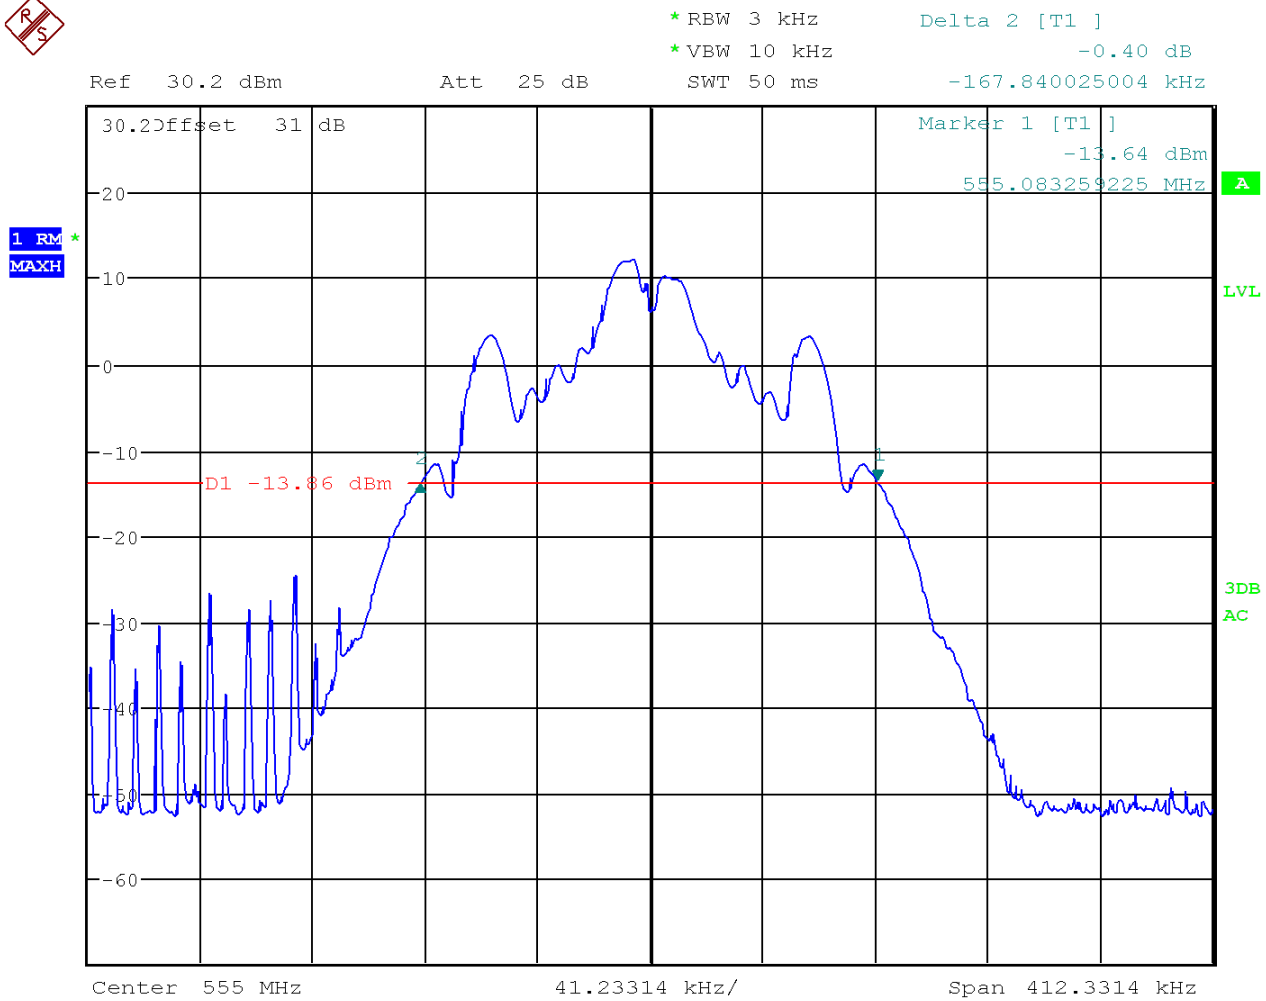

Date: 19.NOV.2024 14:57:04


8.2.9 Test Data: 26dB Occupied Bandwidth Measurement Plot, 607.925 MHz

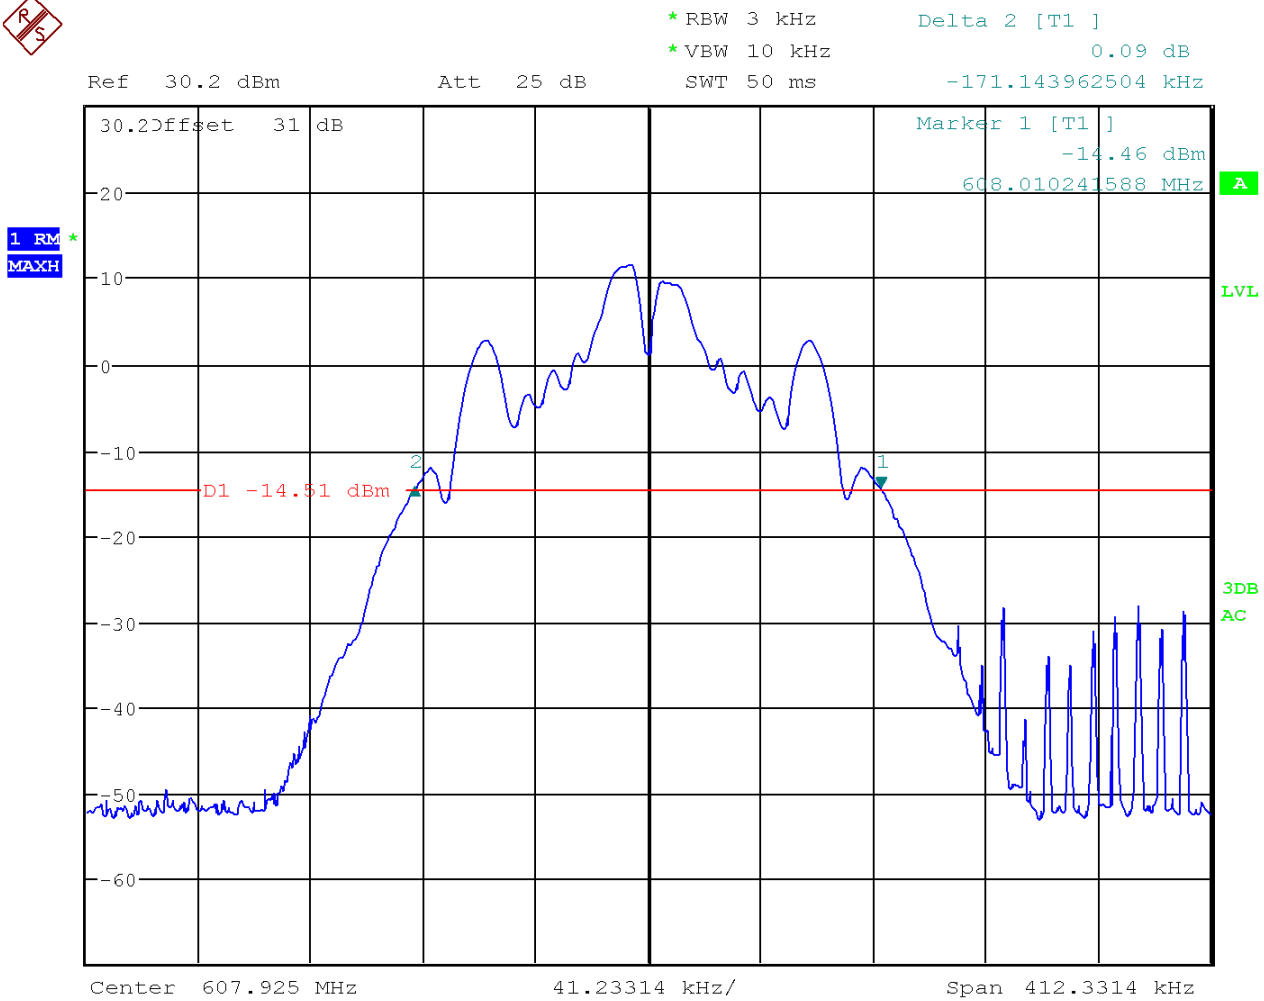

Date: 19.NOV.2024 14:53:28



8.2.10 Test Data: 26dB Occupied Bandwidth Measurement Plot, 614.075 MHz

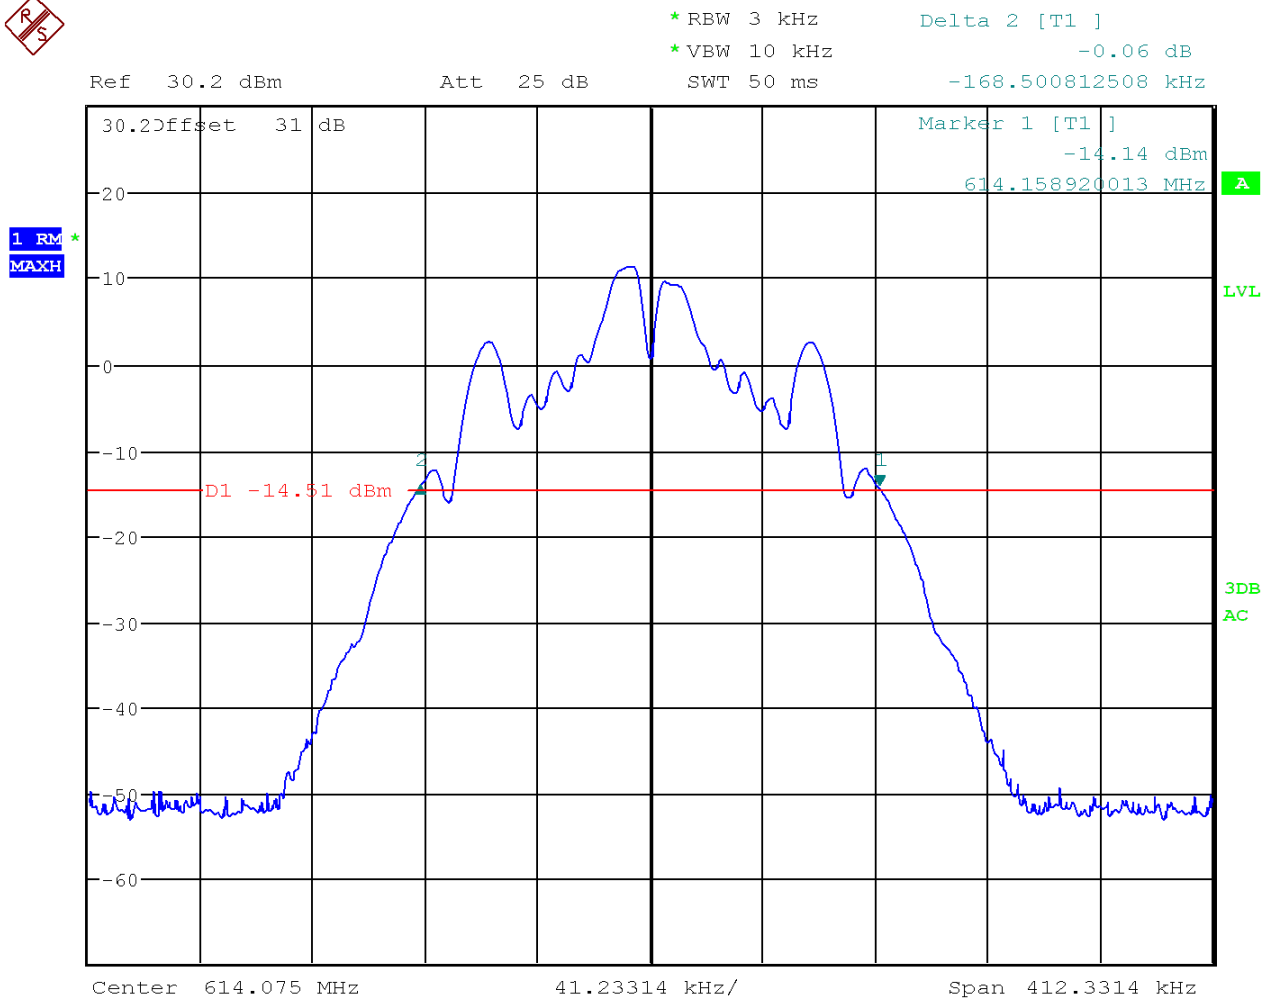


Date: 19.NOV.2024 14:49:02



Timco Engineering, Inc., an IIA Company
13146 NW 86th Drive, Suite 400, Alachua, Florida 32615
(352) 472-5500 / testing@industrial-ia.com


8.2.11 Test Data: 26dB Occupied Bandwidth Measurement Plot, 615.925 MHz

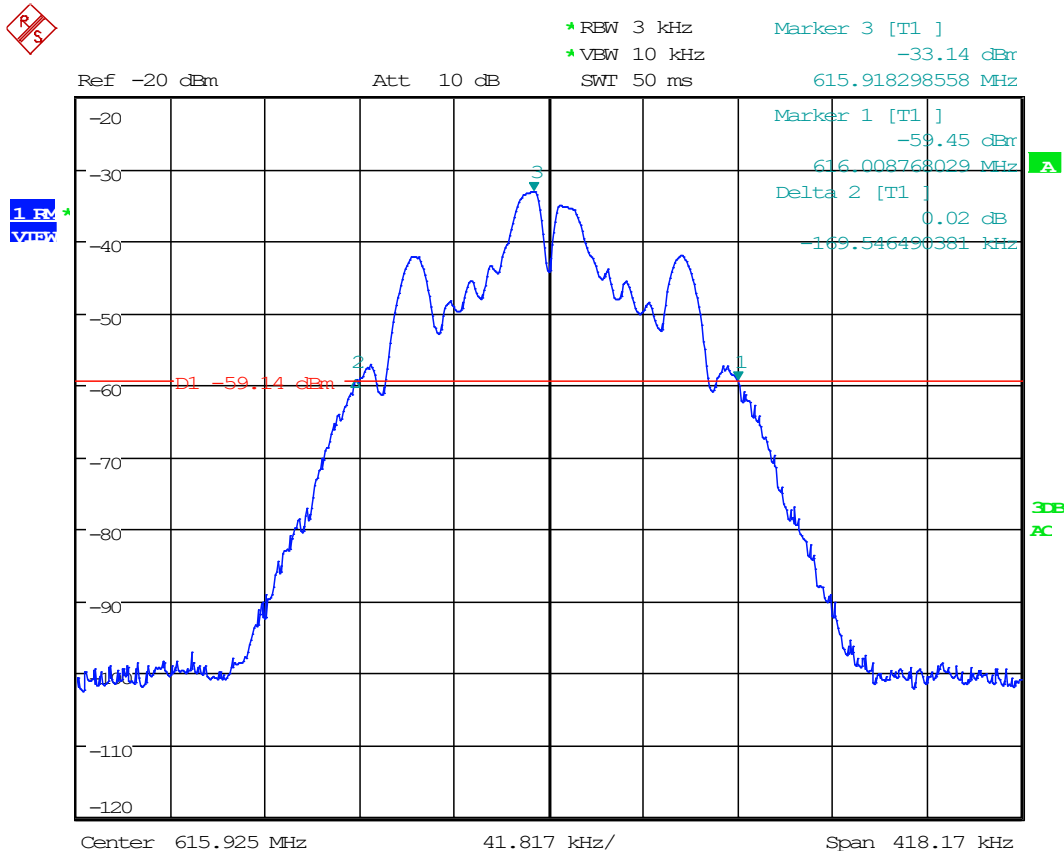

Date: 25.NOV.2024 16:33:43




8.2.12 Test Data: 26dB Occupied Bandwidth Measurement Plot, 662.925 MHz

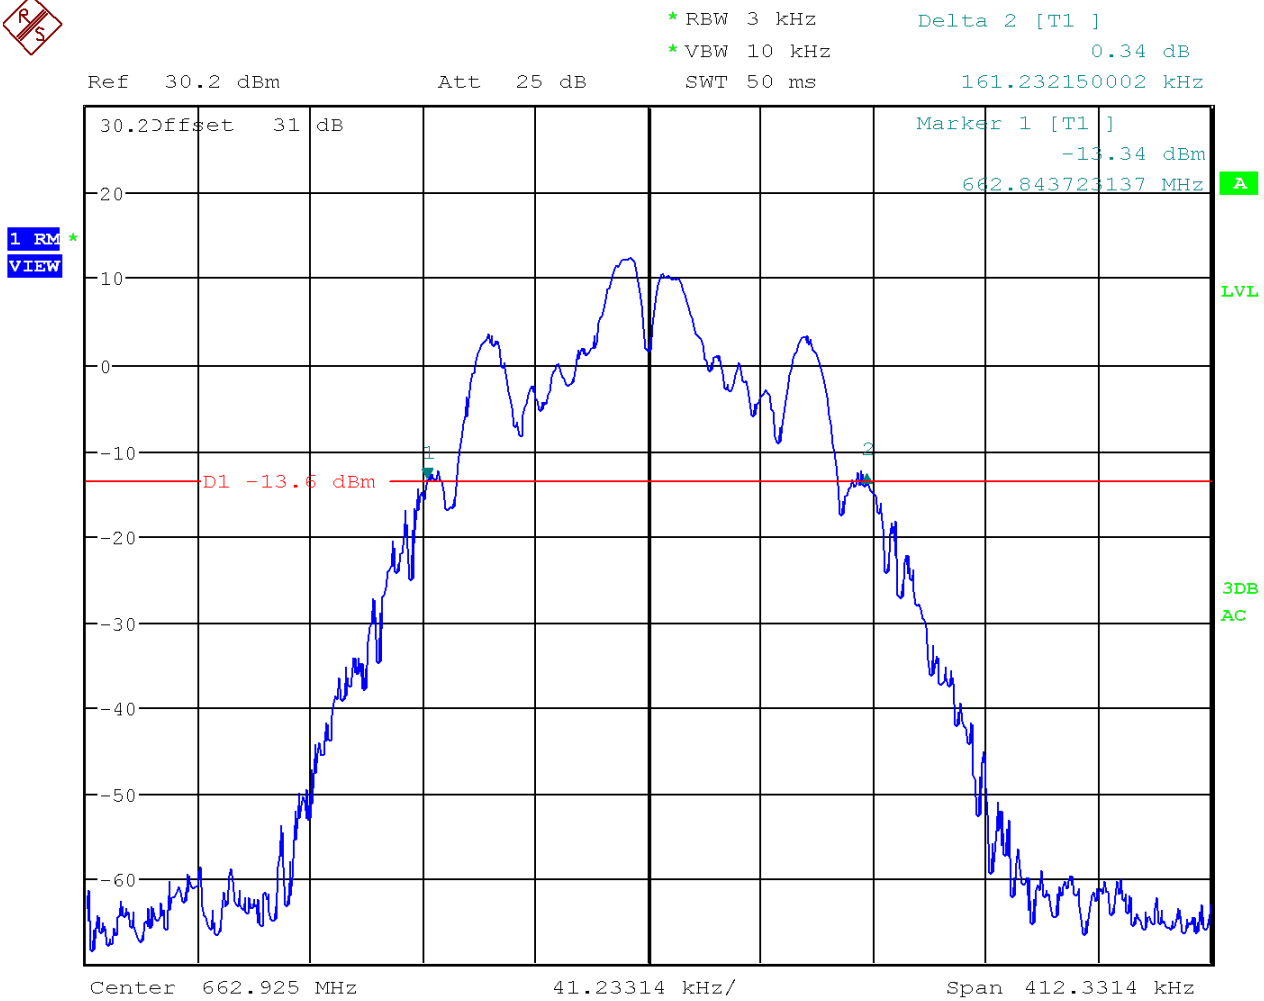


Date: 19.NOV.2024 14:02:28

8.3 OCCUPIED BANDWIDTH (Mask)

Limits from Part FCC Part 15.236 (g) and ETSI EN 300 422-1, test procedure from ANSI C63.10.

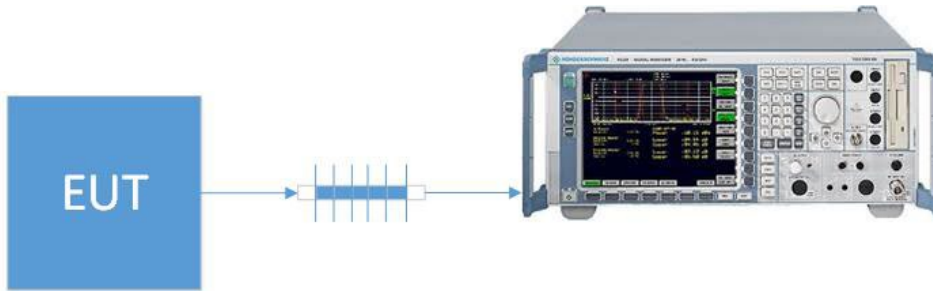


8.3.1 Test Data: Emission Mask Plot, 470.075 MHz

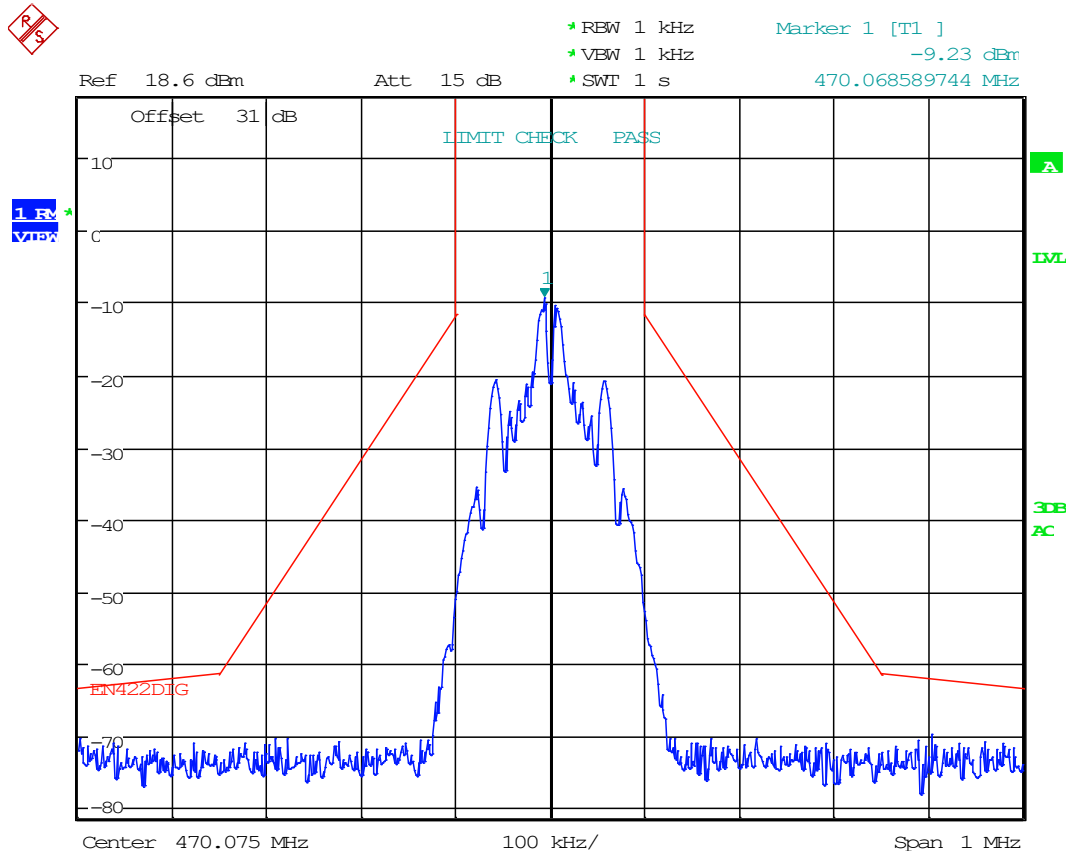


Date: 25.NOV.2024 16:40:52

8.3.2 Test Data: Emission Mask Plot, 555.000 MHz

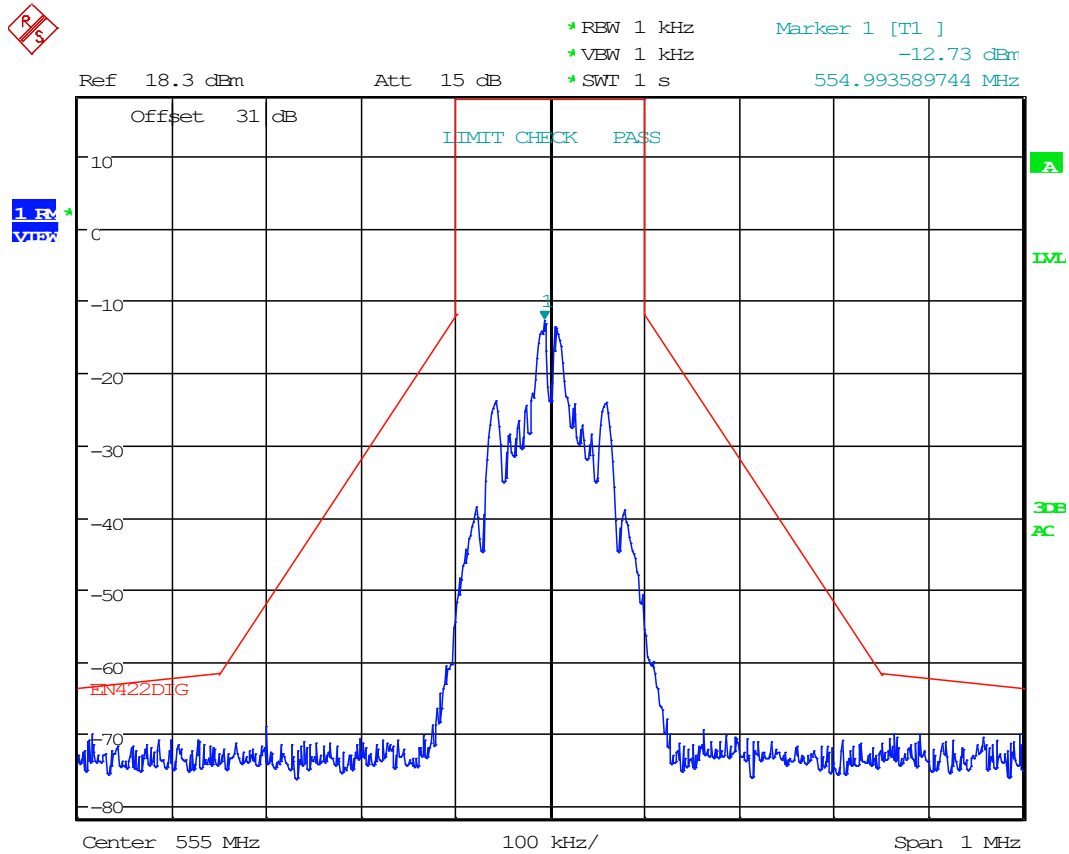


Date: 25.NOV.2024 16:42:13

8.3.3 Test Data: Emission Mask Plot, 607.925 MHz

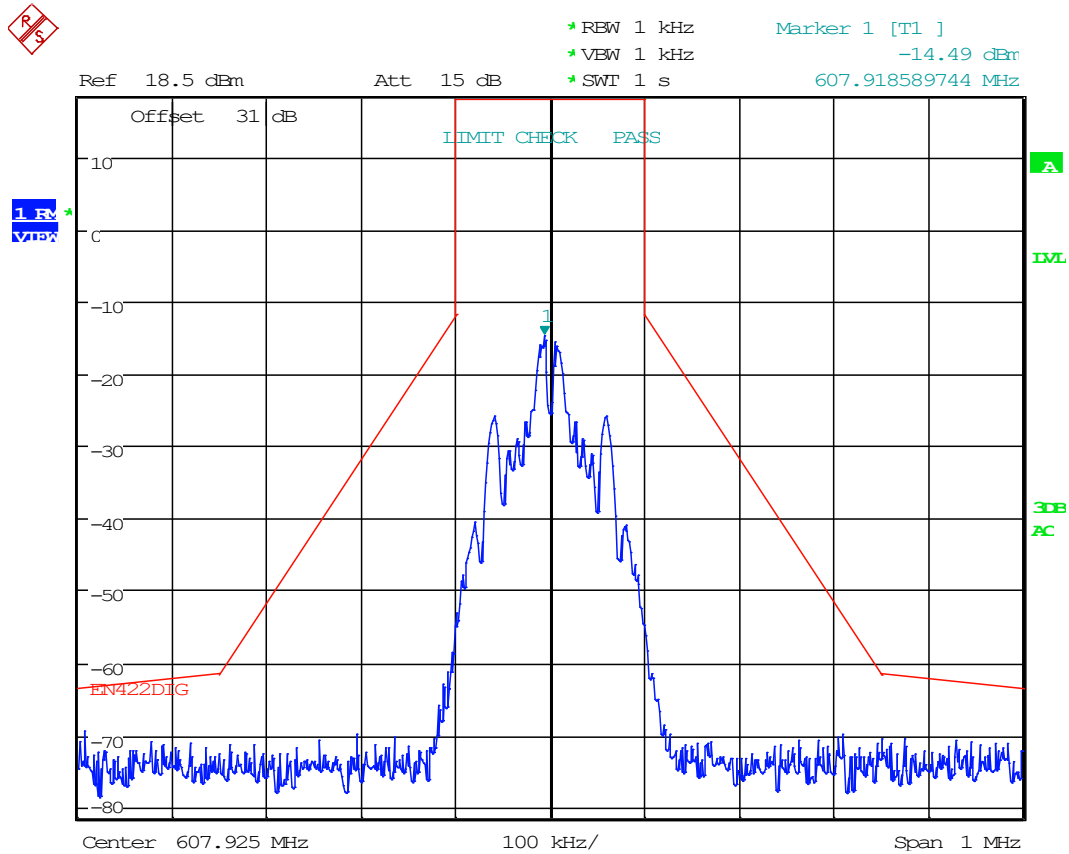


Date: 25.NOV.2024 16:43:14

8.3.4 Test Data: Emission Mask Plot, 614.075 MHz

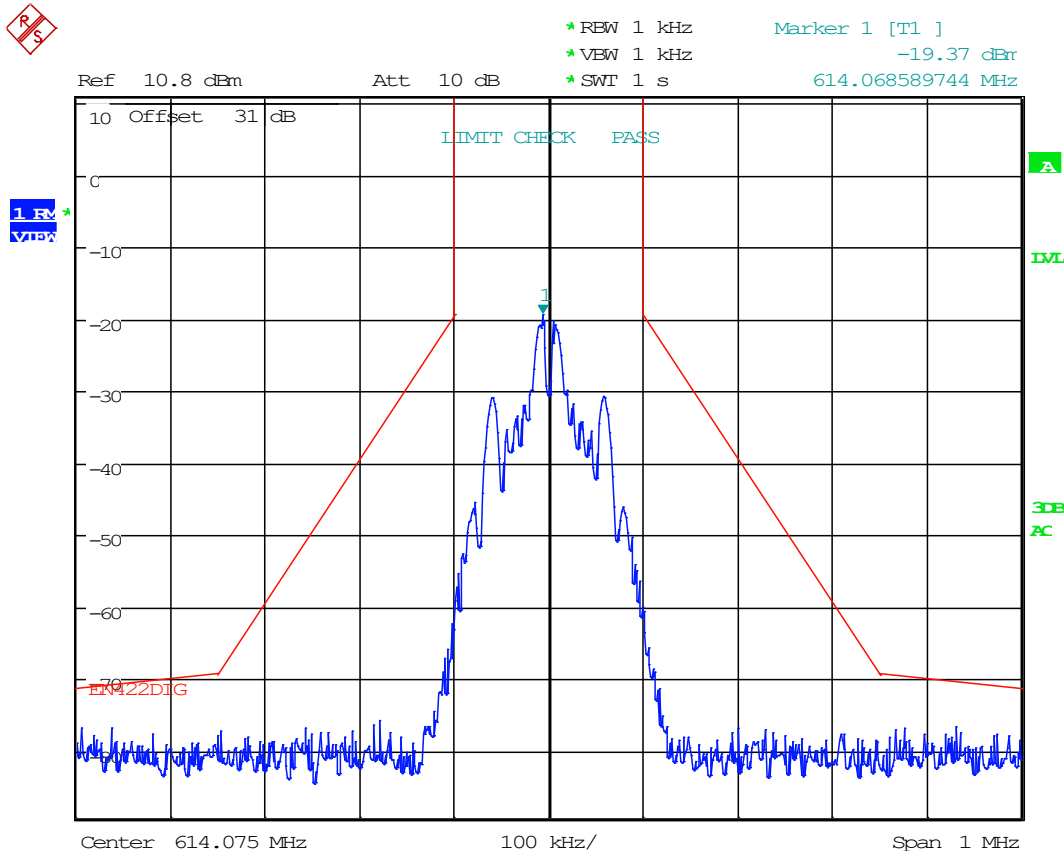


Date: 25.NOV.2024 16:44:55

8.3.5 Test Data: Emission Mask Plot, 615.925 MHz

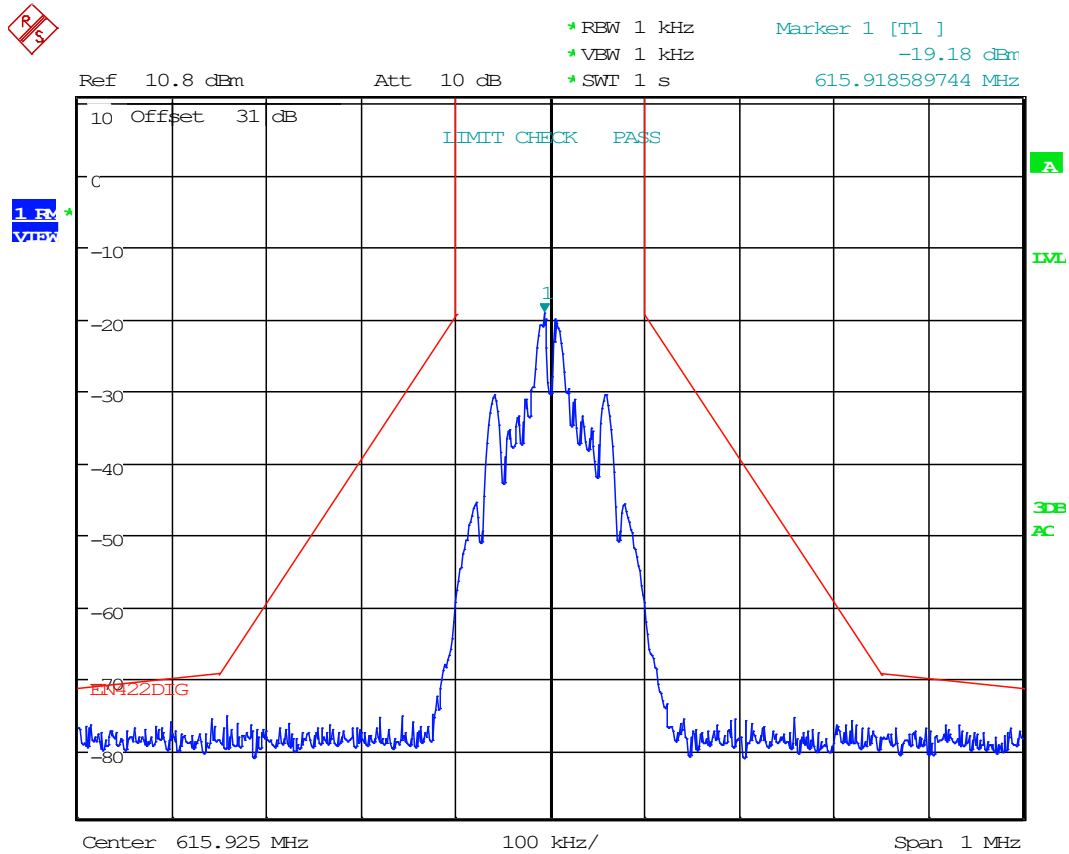

Date: 25.NOV.2024 16:46:14

8.3.6 Test Data: Emission Mask Plot, 662.925 MHz

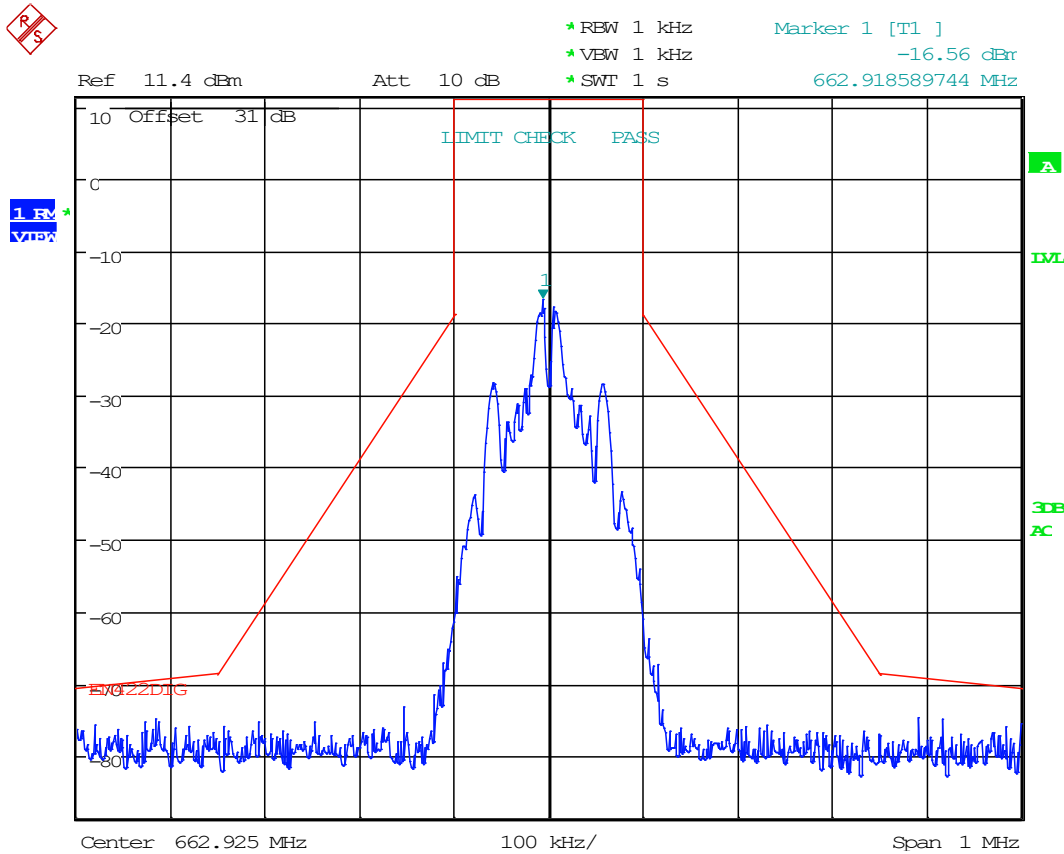


Date: 25.NOV.2024 16:48:31


8.4 Radiated Emissions

Limits from FCC Part 15.236 (g) and test procedure from ANSI C63.10.

Radiated Test Setup, 30 – 1000 MHz

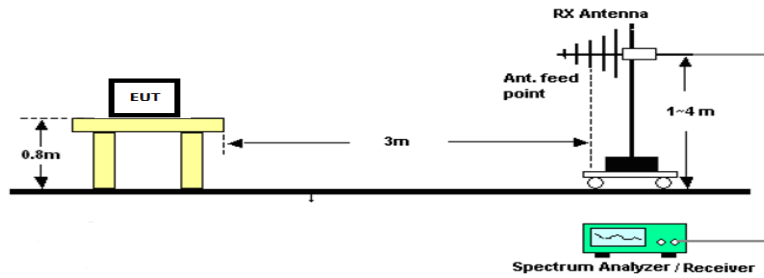

Radiated Test Setup, Above 1000 MHz

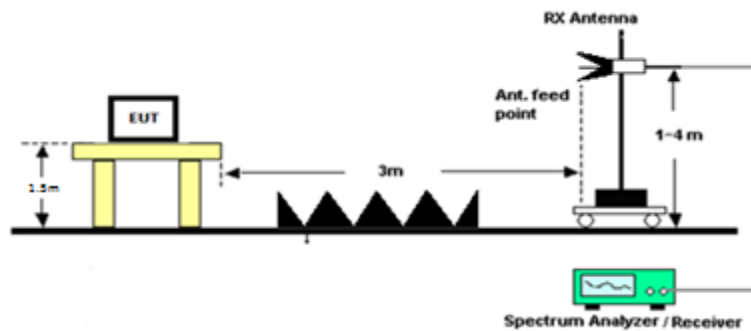



Timco Engineering, Inc., an IIA Company
13146 NW 86th Drive, Suite 400, Alachua, Florida 32615
(352) 472-5500 / testing@industrial-ia.com

8.4.1 Radiated Emissions Table, 470.075 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBuV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
470.075	940.150	PK	22.20	H	-3.59	23.04	3.00	41.65	-55.73	-30.00	25.73
470.075	940.150	PK	21.00	V	-3.59	23.04	3.00	40.45	-56.93	-30.00	26.93
470.075	1410.225	PK	22.20	H	-4.38	27.95	3.00	45.77	-51.61	-30.00	21.61
470.075	1410.225	PK	18.20	V	-4.38	27.95	3.00	41.77	-55.61	-30.00	25.61
470.075	1880.300	PK	11.20	H	-5.11	31.37	3.00	37.46	-59.91	-30.00	29.91
470.075	1880.300	PK	10.60	V	-5.11	31.37	3.00	36.86	-60.51	-30.00	30.51
470.075	2350.375	PK	11.00	H	-5.81	31.91	3.00	37.10	-60.28	-30.00	30.28
470.075	2350.375	PK	10.80	V	-5.81	31.91	3.00	36.90	-60.48	-30.00	30.48
470.075	2820.450	PK	13.80	H	-6.33	32.52	3.00	39.98	-57.39	-30.00	27.39
470.075	2820.450	PK	13.70	V	-6.33	32.52	3.00	39.88	-57.49	-30.00	27.49
470.075	3290.525	PK	10.40	H	-6.83	32.80	3.00	36.36	-61.02	-30.00	31.02
470.075	3290.525	PK	11.90	V	-6.83	32.80	3.00	37.86	-59.52	-30.00	29.52
470.075	3760.600	PK	11.20	H	-7.29	33.19	3.00	37.10	-60.28	-30.00	30.28
470.075	3760.600	PK	11.00	V	-7.29	33.19	3.00	36.90	-60.48	-30.00	30.48
470.075	4230.675	PK	12.00	H	-7.77	33.46	3.00	37.69	-59.69	-30.00	29.69
470.075	4230.675	PK	11.70	V	-7.77	33.46	3.00	37.39	-59.99	-30.00	29.99
470.075	4700.750	PK	10.20	H	-8.19	34.07	3.00	36.08	-61.29	-30.00	31.29
470.075	4700.750	PK	11.40	V	-8.19	34.07	3.00	37.28	-60.09	-30.00	30.09



Timco Engineering, Inc., an IIA Company
 13146 NW 86th Drive, Suite 400, Alachua, Florida 32615
 (352) 472-5500 / testing@industrial-ia.com

8.4.2 Radiated Emissions Table, 555.000 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBμV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
555.00	1110.00	PK	23.20	H	-3.95	27.50	3.00	46.75	-50.63	-30.00	20.63
555.00	1110.00	PK	22.40	V	-3.95	27.50	3.00	45.95	-51.43	-30.00	21.43
555.00	1665.00	PK	13.20	H	-4.73	28.84	3.00	37.31	-60.06	-30.00	30.06
555.00	1665.00	PK	15.20	V	-4.73	28.84	3.00	39.31	-58.06	-30.00	28.06
555.00	2220.00	PK	12.20	H	-5.65	31.54	3.00	38.08	-59.29	-30.00	29.29
555.00	2220.00	PK	12.20	V	-5.65	31.54	3.00	38.08	-59.29	-30.00	29.29
555.00	2775.00	PK	13.80	H	-6.28	32.51	3.00	40.03	-57.34	-30.00	27.34
555.00	2775.00	PK	13.50	V	-6.28	32.51	3.00	39.73	-57.64	-30.00	27.64
555.00	3330.00	PK	12.60	H	-6.87	32.72	3.00	38.45	-58.93	-30.00	28.93
555.00	3330.00	PK	12.90	V	-6.87	32.72	3.00	38.75	-58.63	-30.00	28.63
555.00	3885.00	PK	10.70	H	-7.46	33.46	3.00	36.70	-60.68	-30.00	30.68
555.00	3885.00	PK	10.40	V	-7.46	33.46	3.00	36.40	-60.98	-30.00	30.98
555.00	4440.00	PK	11.70	H	-7.99	33.85	3.00	37.56	-59.82	-30.00	29.82
555.00	4440.00	PK	11.40	V	-7.99	33.85	3.00	37.26	-60.12	-30.00	30.12
555.00	4995.00	PK	12.90	H	-8.44	34.02	3.00	38.48	-58.89	-30.00	28.89
555.00	4995.00	PK	12.80	V	-8.44	34.02	3.00	38.38	-58.99	-30.00	28.99
555.00	5550.00	PK	11.30	H	-8.97	34.72	3.00	37.05	-60.32	-30.00	30.32
555.00	5550.00	PK	11.60	V	-8.97	34.72	3.00	37.35	-60.02	-30.00	30.02



Timco Engineering, Inc., an IIA Company
13146 NW 86th Drive, Suite 400, Alachua, Florida 32615
(352) 472-5500 / testing@industrial-ia.com

8.4.3 Radiated Emissions Table, 607.925 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBuV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
607.925	1215.850	PK	24.50	H	-4.04	28.33	3.00	48.78	-48.59	-30.00	18.59
607.925	1215.850	PK	19.70	V	-4.04	28.33	3.00	43.98	-53.39	-30.00	23.39
607.925	1823.775	PK	13.20	H	-5.11	30.77	3.00	38.86	-58.52	-30.00	28.52
607.925	1823.775	PK	11.00	V	-5.11	30.77	3.00	36.66	-60.72	-30.00	30.72
607.925	2431.700	PK	13.00	H	-5.90	32.33	3.00	39.43	-57.95	-30.00	27.95
607.925	2431.700	PK	12.70	V	-5.90	32.33	3.00	39.13	-58.25	-30.00	28.25
607.925	3039.625	PK	12.30	H	-6.57	32.86	3.00	38.59	-58.78	-30.00	28.78
607.925	3039.625	PK	12.70	V	-6.57	32.86	3.00	38.99	-58.38	-30.00	28.38
607.925	3647.550	PK	12.10	H	-7.18	33.21	3.00	38.13	-59.25	-30.00	29.25
607.925	3647.550	PK	12.30	V	-7.18	33.21	3.00	38.33	-59.05	-30.00	29.05
607.925	4255.475	PK	12.90	H	-7.79	33.45	3.00	38.56	-58.81	-30.00	28.81
607.925	4255.475	PK	12.50	V	-7.79	33.45	3.00	38.16	-59.21	-30.00	29.21
607.925	4863.400	PK	11.00	H	-8.31	34.14	3.00	36.83	-60.54	-30.00	30.54
607.925	4863.400	PK	11.90	V	-8.31	34.14	3.00	37.73	-59.64	-30.00	29.64
607.925	5471.325	PK	10.90	H	-8.89	34.71	3.00	36.72	-60.65	-30.00	30.65
607.925	5471.325	PK	11.70	V	-8.89	34.71	3.00	37.52	-59.85	-30.00	29.85
607.925	6079.250	PK	12.00	H	-9.40	35.47	3.00	38.07	-59.31	-30.00	29.31
607.925	6079.250	PK	12.20	V	-9.40	35.47	3.00	38.27	-59.11	-30.00	29.11



Timco Engineering, Inc., an IIA Company
 13146 NW 86th Drive, Suite 400, Alachua, Florida 32615
 (352) 472-5500 / testing@industrial-ia.com

8.4.4 Radiated Emissions Table, 614.075 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBμV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
614.075	1228.15	PK	18.90	H	-4.08	28.50	3.00	43.32	-54.06	-30.00	24.06
614.075	1228.15	PK	18.10	V	-4.08	28.50	3.00	42.52	-54.86	-30.00	24.86
614.075	1842.23	PK	10.80	H	-5.11	31.03	3.00	36.72	-60.65	-30.00	30.65
614.075	1842.23	PK	10.60	V	-5.11	31.03	3.00	36.52	-60.85	-30.00	30.85
614.075	2456.30	PK	13.00	H	-5.93	32.32	3.00	39.39	-57.98	-30.00	27.98
614.075	2456.30	PK	13.80	V	-5.93	32.32	3.00	40.19	-57.18	-30.00	27.18
614.075	3070.38	PK	10.60	H	-6.61	32.90	3.00	36.89	-60.49	-30.00	30.49
614.075	3070.38	PK	10.70	V	-6.61	32.90	3.00	36.99	-60.39	-30.00	30.39
614.075	3684.45	PK	11.80	H	-7.21	33.20	3.00	37.79	-59.59	-30.00	29.59
614.075	3684.45	PK	12.10	V	-7.21	33.20	3.00	38.09	-59.29	-30.00	29.29
614.075	4298.53	PK	10.80	H	-7.83	33.51	3.00	36.48	-60.90	-30.00	30.90
614.075	4298.53	PK	11.50	V	-7.83	33.51	3.00	37.18	-60.20	-30.00	30.20
614.075	4912.60	PK	11.60	H	-8.35	34.05	3.00	37.30	-60.08	-30.00	30.08
614.075	4912.60	PK	11.70	V	-8.35	34.05	3.00	37.40	-59.98	-30.00	29.98
614.075	5526.68	PK	11.40	H	-8.95	34.70	3.00	37.15	-60.22	-30.00	30.22
614.075	5526.68	PK	11.00	V	-8.95	34.70	3.00	36.75	-60.62	-30.00	30.62
614.075	6140.75	PK	12.00	H	-9.47	35.55	3.00	38.08	-59.30	-30.00	29.30
614.075	6140.75	PK	12.70	V	-9.47	35.55	3.00	38.78	-58.60	-30.00	28.60



Timco Engineering, Inc., an IIA Company
13146 NW 86th Drive, Suite 400, Alachua, Florida 32615
(352) 472-5500 / testing@industrial-ia.com

8.4.5 Radiated Emissions Table, 615.925 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBuV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
615.925	1231.85	PK	18.20	H	-4.09	28.53	3.00	42.64	-54.74	-30.00	24.74
615.925	1231.85	PK	17.30	V	-4.09	28.53	3.00	41.74	-55.64	-30.00	25.64
615.925	1847.78	PK	10.70	H	-5.11	31.08	3.00	36.67	-60.70	-30.00	30.70
615.925	1847.78	PK	10.80	V	-5.11	31.08	3.00	36.77	-60.60	-30.00	30.60
615.925	2463.70	PK	13.10	H	-5.93	32.33	3.00	39.49	-57.89	-30.00	27.89
615.925	2463.70	PK	13.60	V	-5.93	32.33	3.00	39.99	-57.39	-30.00	27.39
615.925	3079.63	PK	10.70	H	-6.62	32.90	3.00	36.97	-60.40	-30.00	30.40
615.925	3079.63	PK	10.50	V	-6.62	32.90	3.00	36.77	-60.60	-30.00	30.60
615.925	3695.55	PK	12.30	H	-7.22	33.19	3.00	38.27	-59.10	-30.00	29.10
615.925	3695.55	PK	12.30	V	-7.22	33.19	3.00	38.27	-59.10	-30.00	29.10
615.925	4311.48	PK	11.30	H	-7.84	33.55	3.00	37.01	-60.37	-30.00	30.37
615.925	4311.48	PK	11.10	V	-7.84	33.55	3.00	36.81	-60.57	-30.00	30.57
615.925	4927.40	PK	11.70	H	-8.37	34.02	3.00	37.35	-60.02	-30.00	30.02
615.925	4927.40	PK	12.00	V	-8.37	34.02	3.00	37.65	-59.72	-30.00	29.72
615.925	5543.33	PK	11.40	H	-8.96	34.72	3.00	37.15	-60.22	-30.00	30.22
615.925	5543.33	PK	11.00	V	-8.96	34.72	3.00	36.75	-60.62	-30.00	30.62
615.925	6159.25	PK	12.60	H	-9.50	35.56	3.00	38.67	-58.71	-30.00	28.71
615.925	6159.25	PK	12.50	V	-9.50	35.56	3.00	38.57	-58.81	-30.00	28.81



Timco Engineering, Inc., an IIA Company
 13146 NW 86th Drive, Suite 400, Alachua, Florida 32615
 (352) 472-5500 / testing@industrial-ia.com

8.4.6 Radiated Emissions Table, 662.925 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBμV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
662.925	1325.85	PK	18.70	H	-4.30	28.98	3.00	43.38	-54.00	-30.00	24.00
662.925	1325.85	PK	17.70	V	-4.30	28.98	3.00	42.38	-55.00	-30.00	25.00
662.925	1988.78	PK	11.60	H	-5.37	31.62	3.00	37.86	-59.52	-30.00	29.52
662.925	1988.78	PK	10.90	V	-5.37	31.62	3.00	37.16	-60.22	-30.00	30.22
662.925	2651.70	PK	11.80	H	-6.14	32.52	3.00	38.18	-59.20	-30.00	29.20
662.925	2651.70	PK	12.20	V	-6.14	32.52	3.00	38.58	-58.80	-30.00	28.80
662.925	3314.63	PK	10.10	H	-6.86	32.76	3.00	36.01	-61.37	-30.00	31.37
662.925	3314.63	PK	10.90	V	-6.86	32.76	3.00	36.81	-60.57	-30.00	30.57
662.925	3977.55	PK	12.20	H	-7.54	33.43	3.00	38.09	-59.29	-30.00	29.29
662.925	3977.55	PK	12.20	V	-7.54	33.43	3.00	38.09	-59.29	-30.00	29.29
662.925	4640.48	PK	11.30	H	-8.15	34.10	3.00	37.25	-60.13	-30.00	30.13
662.925	4640.48	PK	10.80	V	-8.15	34.10	3.00	36.75	-60.63	-30.00	30.63
662.925	5303.40	PK	11.10	H	-8.73	34.47	3.00	36.84	-60.54	-30.00	30.54
662.925	5303.40	PK	11.80	V	-8.73	34.47	3.00	37.54	-59.84	-30.00	29.84
662.925	5966.33	PK	12.40	H	-9.27	35.29	3.00	38.42	-58.96	-30.00	28.96
662.925	5966.33	PK	12.20	V	-9.27	35.29	3.00	38.22	-59.16	-30.00	29.16
662.925	6629.25	PK	13.80	H	-9.81	35.76	3.00	39.75	-57.62	-30.00	27.62
662.925	6629.25	PK	13.40	V	-9.81	35.76	3.00	39.35	-58.02	-30.00	28.02



9. ANNEX-A - Photographs of the EUT

Photographs of the EUT and any manufacturer supplied accessories to be used with the EUT are in a separate document.

10. ANNEX-B – Test Setup Photographs

Test setup photographs are located in a separate document.

11. History of Test Report Changes

Test Report #	Revision #	Description	Date of Issue
TR_17549-24_PT 15.236	1	Initial release	12/16/2024



Timco Engineering, Inc., an IIA Company
13146 NW 86th Drive, Suite 400, Alachua, Florida 32615
(352) 472-5500 / testing@industrial-ia.com

END OF TEST REPORT
