



FCC Part 15.236 Test Report

APPLICANT	WISYCOM
	VIA SPIN, 156 ROMANO D'EZZELINO (VI) 36060 ITALY
FCC ID	POUMTP41
MODEL NUMBER	MTP41
PRODUCT DESCRIPTION	WIDEBAND BODYPACK TRANSMITTER
DATE SAMPLE RECEIVED	8/23/2018
DATE TESTED	8/23/2018
TESTED BY	Tim Royer
APPROVED BY	Franklin Rose
TEST RESULTS	☒ PASS ☐ FAIL

Report Number	Report Version	Description	Issue Date
1336BUT18_PT15_TestReport	Rev1	Initial Issue	10/31/2018
1336BUT18_PT15_TestReport	Rev2	Corrected RE Data	12/24/2018

THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.

TABLE OF CONTENTS

GENERAL REMARKS	2
GENERAL INFORMATION	3
RESULTS SUMMARY	4
CHANGE(S) TO EUT, SUMMARY.....	4
RF POWER OUTPUT	5
TEST DATA: MEAN OUTPUT MEASUREMENT TABLE, 600 MHZ GUARD BAND & DUPLEX GAP	5
FREQUENCY SELECTION	6
OCCUPIED BANDWIDTH	7
OCCUPIED BANDWIDTH (26 DB)	8
TEST DATA: 614.075 MHZ	8
TEST DATA: 615.925 MHZ	9
TEST DATA: 658 MHZ	10
TEST DATA: 662.925 MHZ	11
OCCUPIED BANDWIDTH (99 %)	12
TEST DATA: 614.075 MHz	12
TEST DATA: 615.925 MHz	13
TEST DATA: 658 MHz	14
TEST DATA: 662.925 MHz	15
EMISSION MASK	16
TEST DATA: 614.075 MHZ EMISSION MASK PLOT	18
TEST DATA: 615.925 MHZ EMISSION MASK PLOT	19
TEST DATA: 658 MHZ EMISSION MASK PLOT	20
TEST DATA: 662.925 MHZ EMISSION MASK PLOT	21
FIELD STRENGTH OF SPURIOUS EMISSIONS.....	22
FREQUENCY STABILITY	27
STATEMENT OF MEASUREMENT UNCERTAINTY.....	28
EMC EQUIPMENT LIST	29

GENERAL REMARKS

Summary

The device under test does:

- ☒ Fulfill the general approval requirements as identified in this test report and was selected by the customer.
- ☐ Not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.

I attest that the necessary measurements were made at:

Timco Engineering Inc.
849 NW State Road 45
Newberry, FL 32669
Designation #: US1070

Tested by:



Name and Title	Tim Royer, Project Manager / EMC Testing Engineer
Date	10/31/2018

Reviewed and Approved by:



Name and Title	Franklin Rose, Project Manager / EMC Testing Technician
Date	11/01/2018

GENERAL INFORMATION

EUT Description	WIDEBAND BODYPACK TRANSMITTER
FCC ID	POUMTP41
Model Number	MTP41
Operating Frequency	Band 2: 614.075 – 615.925 MHz Band 4: 658.000 – 662.925 MHz
Test Frequencies	Band 2: 614.075 - 615.925 MHz Band 4: 658.000 - 662.925 MHz
EUT Power Source	☐ 110–120Vac/50– 60Hz
	☐ DC Power
	☒ Battery Operated Exclusively
Test Item	☐ Prototype
	☐ Pre-Production
	☒ Production
Type of Equipment	☐ Fixed
	☐ Mobile
	☒ Portable
Antenna Connector	BNC
Test Conditions	The temperature was 26°C Relative humidity of 50%.
Modification to the EUT	No Modification to EUT.
Test Exercise	The EUT was placed in continuous transmit and was operated in “Test Mode” for digital emissions tests.
Applicable Standards	FCC CFR 47 Part 2, & 15, KDB 206256 D01 v02, , ANSI C63.10 2013, ANSI C63.26 2015
Test Facility	Timco Engineering Inc. at 849 NW State Road 45 Newberry, FL 32669 USA. Designation #: US1070

RESULTS SUMMARY

FCC Rule Part	Requirement	Test Item	Result
PART 2.1046(a), 15.236(d)(2)	Conducted Power	RF Power Output	PASS
PART 15.236(g), ETSI EN 300-422-1 s. 8.3.2	Unwanted Emissions	Emission Mask	PASS

CHANGE(S) TO EUT, SUMMARY

The changes to Part 74 H, specifically in the 600 MHz band have impact on the granted function of this device. In order to comply with the changes outlined in KDB 206256 D01 Wireless Microphones v02, this device has been tested to show compliance with the new rulings.

This device's hardware has not been altered; only the software/firmware settings have been changed in order to become compliant with the newly updated rules, as per KDB 206256, sections II and III. For more specific information, please see the updated Operational Description of the device.

This device was previously granted on the following frequency bands:

Date of Grant: 10/23/2013

470.075 – 607.925 MHz

614.075 – 697.925 MHz

And only the software has been altered to limit operation to:

614.075 – 615.925 MHz

658.000 – 662.925 MHz

Note: The EUT is only marketed and sold to “Professional Users” and Part 74 frequencies are also selectable in device. For more details, see companion report:

“1336AUT18_PT74_TestReport_Rev1”

RF POWER OUTPUT

Rule Part No.: PART 2.1046(a), 15.236(d)(2)


Requirement:

§15.236 Operation of wireless microphones in the bands 54-72 MHz, 76-88 MHz, 174-216 MHz, 470-608 MHz and 614-698 MHz.

(d) The maximum radiated power shall not exceed the following values:

(2) In the 600 MHz guard band and the 600 MHz duplex gap: 20 mW EIRP.

Setup Diagram:

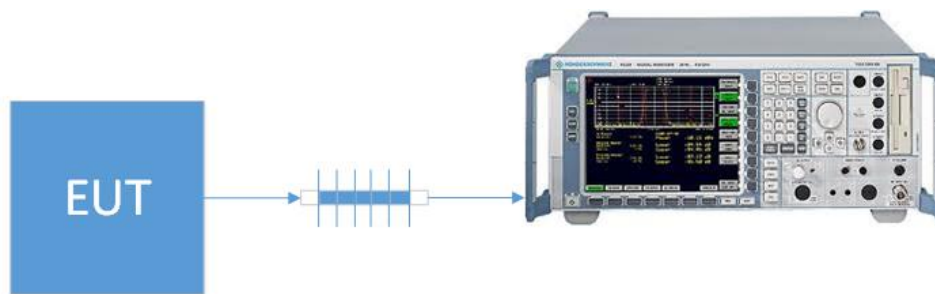

Test Data: Mean Output Measurement Table, 600 MHz Guard Band & Duplex Gap

Tuned Frequency (MHz)	Mean Power Output			
	Level (dBm)	Ant. Gain (dBi)	Level (mW)	Margin (mW)
614.075	10.90	0.00	12.3	7.7
615.925	10.91	0.00	12.3	7.7
658.000	10.91	0.00	12.3	7.7
662.925	11.09	0.00	12.9	7.1

Frequency Selection


Rule Part No.: 15.236(f)(1)

Test Requirements:

(1) The frequency selection shall be offset from the upper or lower band limits by 25 kHz or an integral multiple thereof.

Method of Measurement: For a device that has a permanently attached antenna, RF power is measured radiated. With a nominal battery voltage, and the transmitter properly adjusted, the ,RF output measures:

Test Setup Diagram:

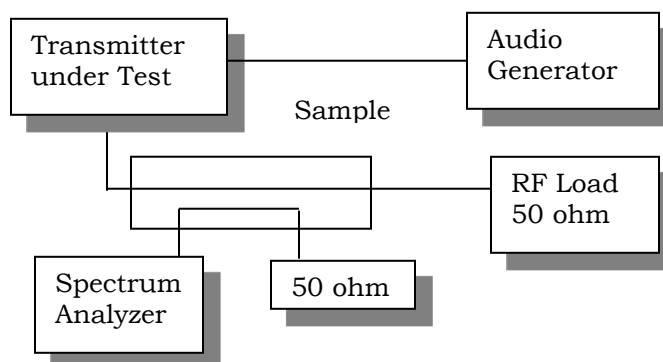

Test Data:

Frequency Range

Low Frequency	470.075	MHz
High Frequency	662.925	MHz

Result: Meets Requirements

OCCUPIED BANDWIDTH


Rules Part No.: FCC Part 15.236 (f) (2)

Requirements:

(2) One or more adjacent 25 kHz segments within the assignable frequencies may be combined to form a channel whose maximum bandwidth shall not exceed 200 kHz. The operating bandwidth shall not exceed 200 kHz.


Measurement Procedure: ANSI C63.26 sec. 5.4.3

Test Setup Diagram:

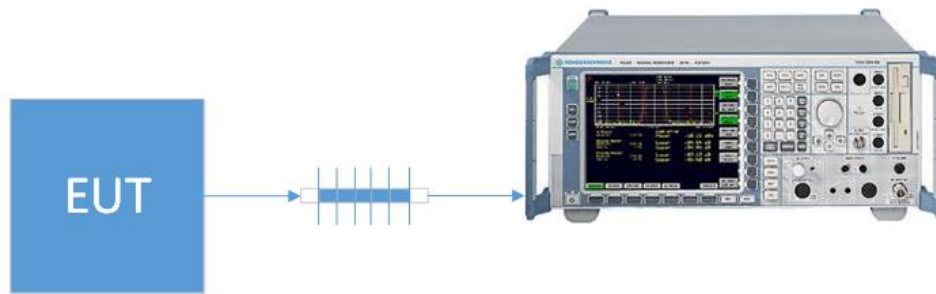

OCCUPIED BANDWIDTH (26 dB)


Test Data: 614.075 MHz

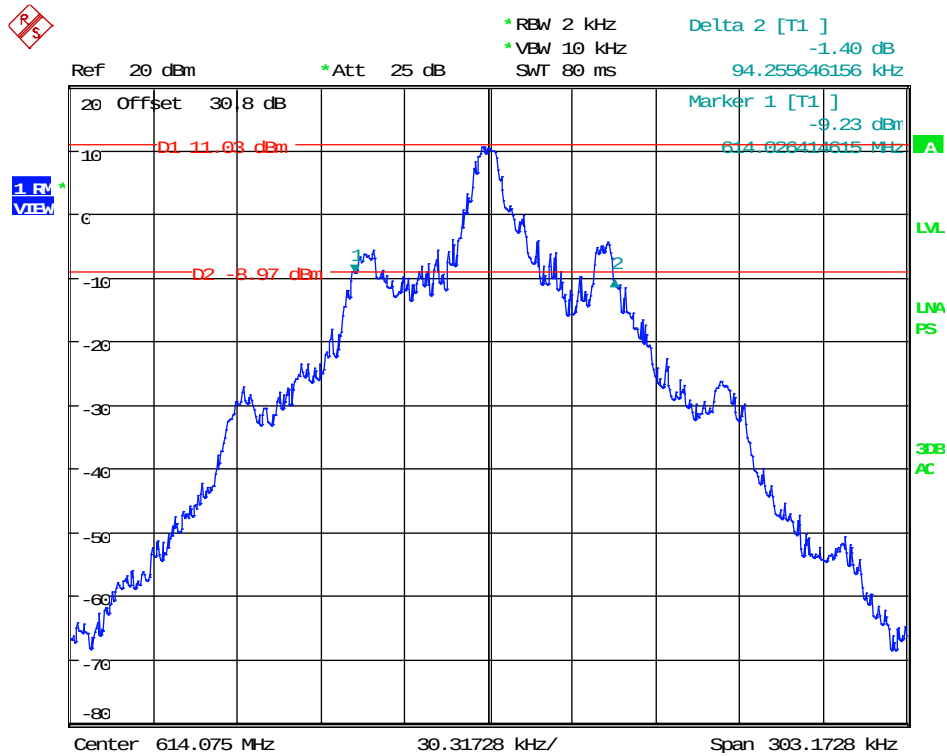

Date: 30.OCT.2018 13:58:46

OCCUPIED BANDWIDTH PLOT (26 dB)


Test Data: 615.925 MHz

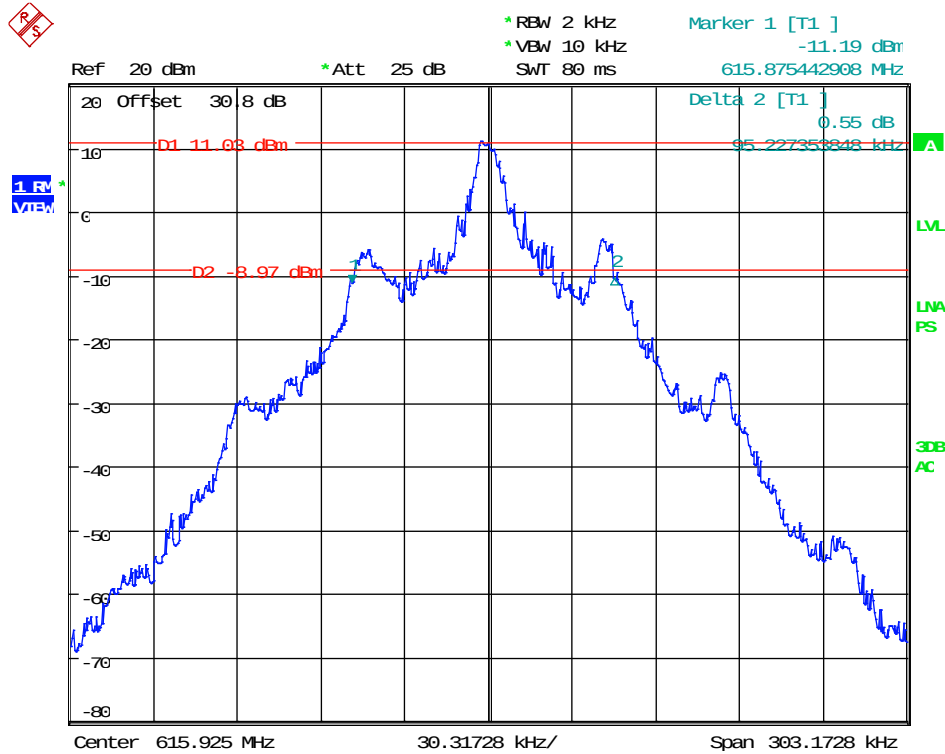

Date: 30.OCT.2018 13:59:38

OCCUPIED BANDWIDTH PLOT (26 dB)


Test Data: 658.000 MHz

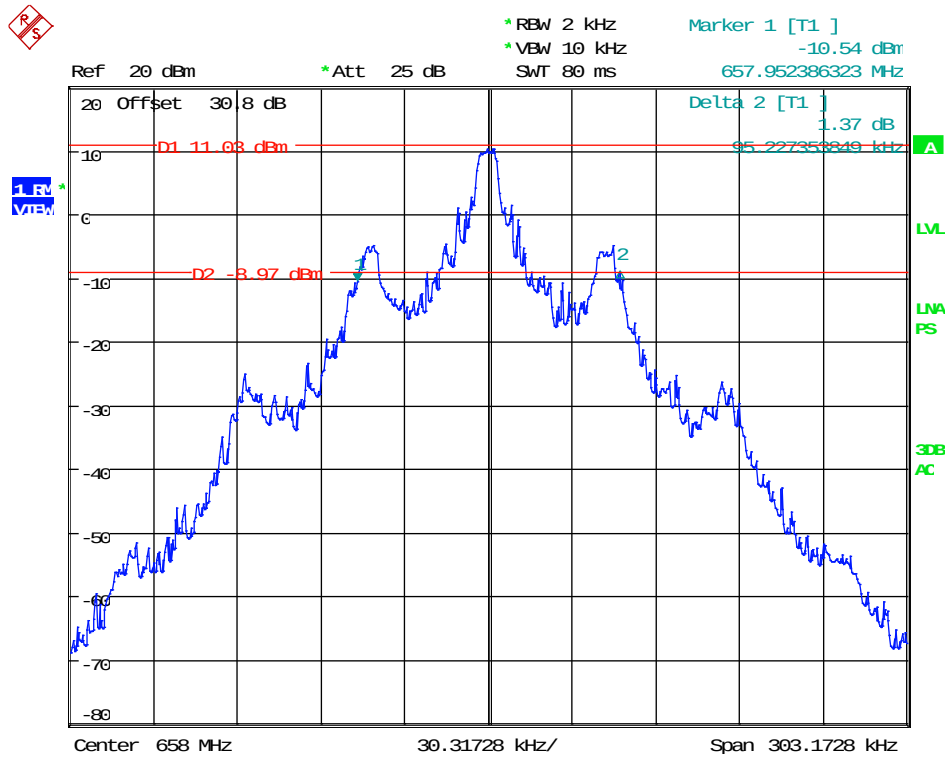

Date: 30.OCT.2018 14:05:32

OCCUPIED BANDWIDTH PLOT (26 dB)


Test Data: 662.925 MHz

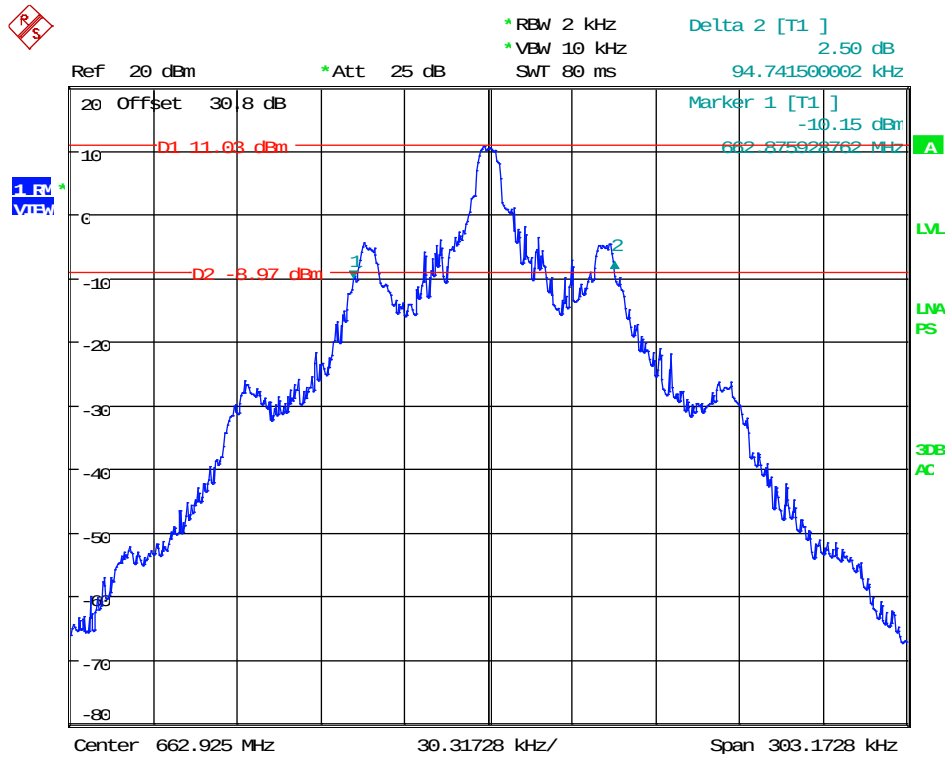

Date: 30.OCT.2018 14:07:10

OCCUPIED BANDWIDTH (99%)


Test Data: 614.075 MHz

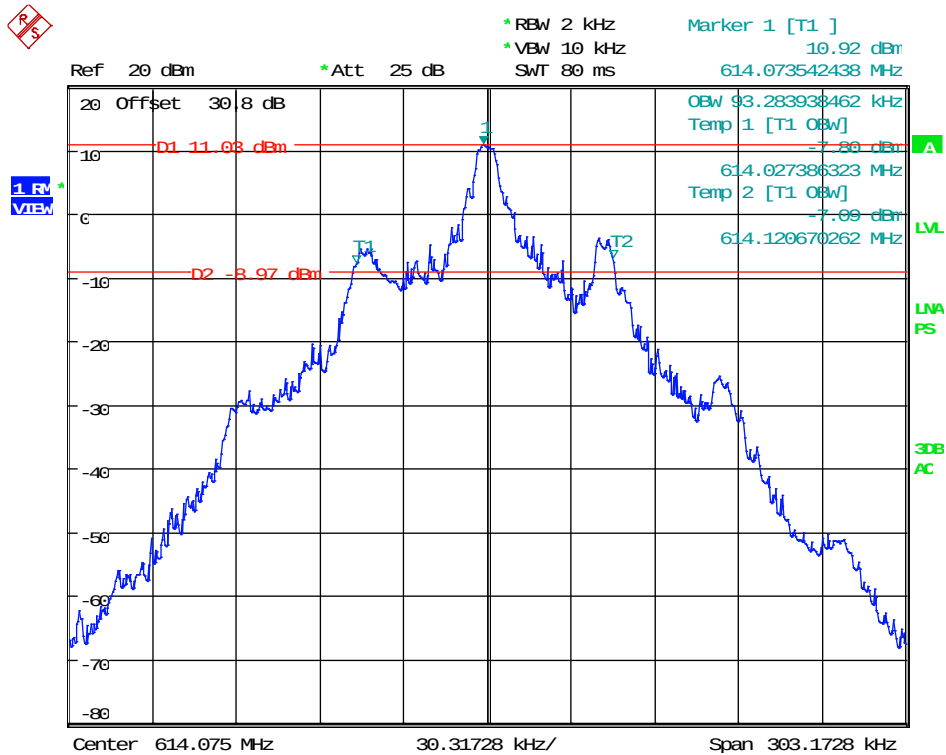

Date: 30.OCT.2018 13:58:08

OCCUPIED BANDWIDTH PLOT (99%)


Test Data: 615.925 MHz

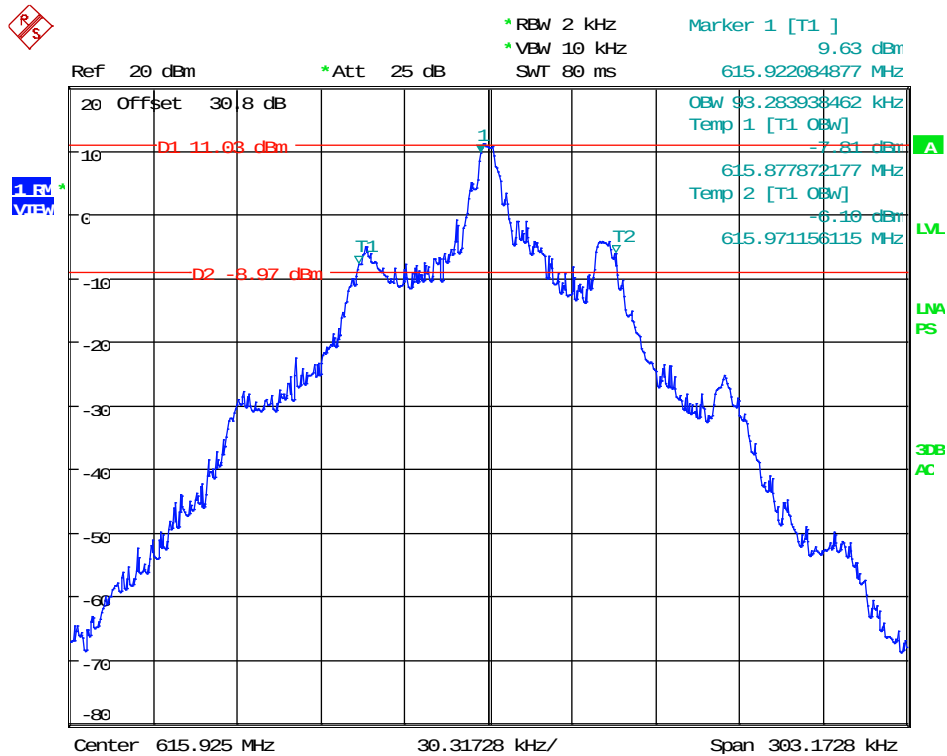

Date: 30.OCT.2018 14:00:22

OCCUPIED BANDWIDTH PLOT (99%)


Test Data: 658.000 MHz

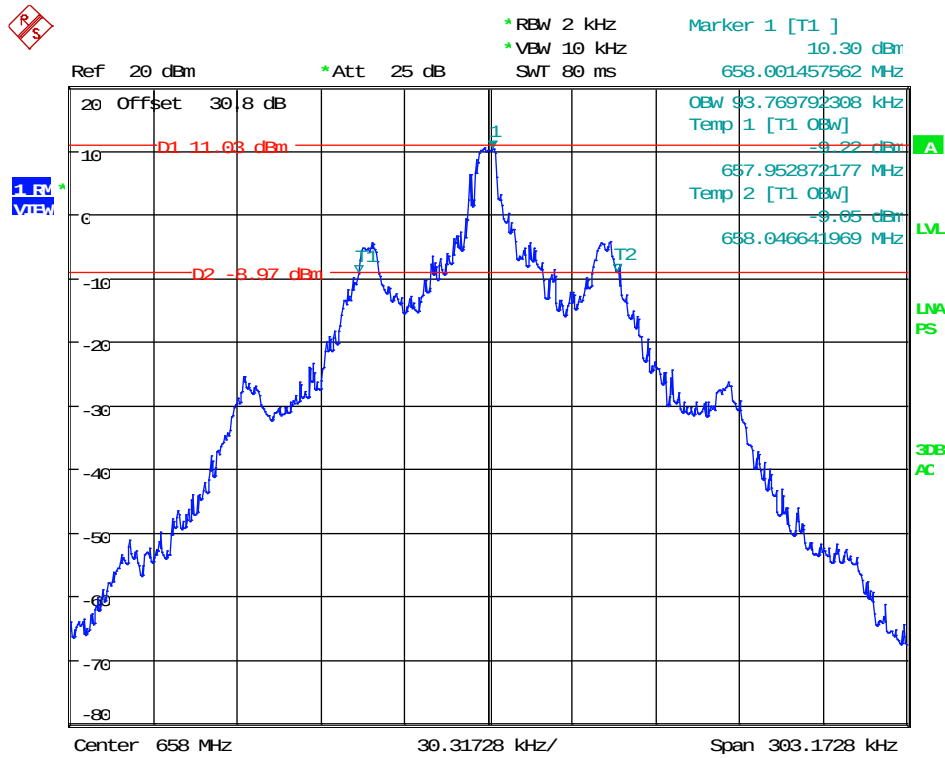

Date: 30.OCT.2018 14:05:59

OCCUPIED BANDWIDTH PLOT (99%)

Test Data: 662.925 MHz

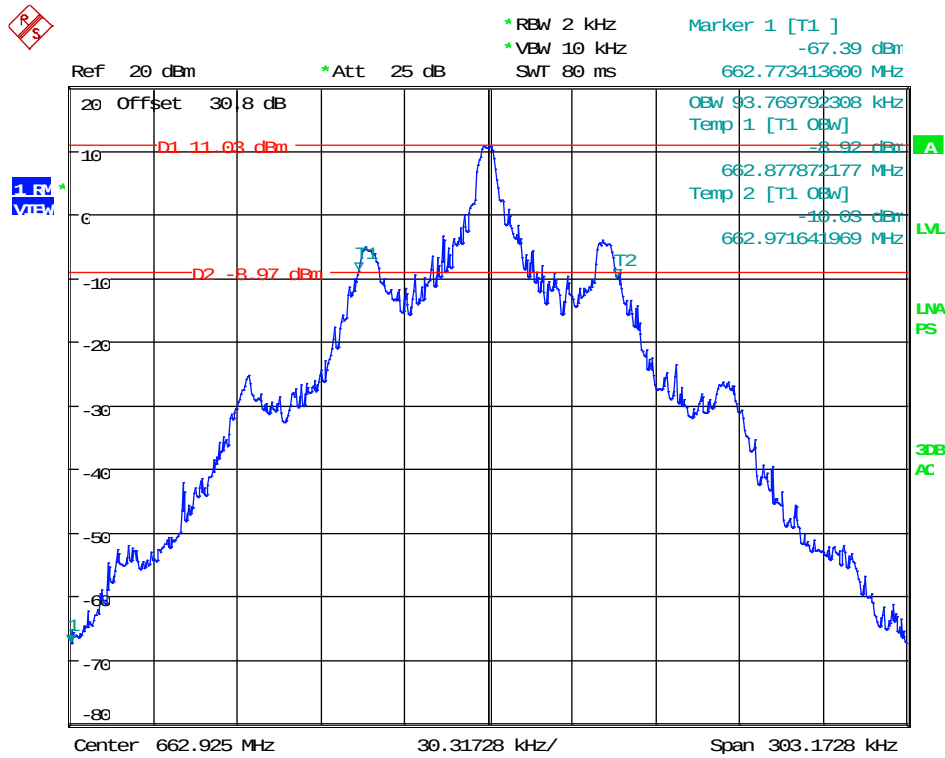

Date: 30.OCT.2018 14:06:36

EMISSION MASK

Rule Part No.: FCC CFR 47 PART 15.236(g)

(g) Emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in §8.3 of ETSI EN 300 422-1 V1.4.2 (2011-08), *Electromagnetic compatibility and Radio spectrum Matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range; Part 1: Technical characteristics and methods of measurement*. Emissions outside of this band shall comply with the limits specified in section 8.4 of ETSI EN 300 422-1 V1.4.2 (2011-08).

Requirement: ETSI EN 300 422-1 Section 8.3.2

- (c) Compliance for emission mask and spurious emission requirements shall be demonstrated using the applicable measurement procedures of ETSI EN 300 422-1. Compliance with the emission limits shall be demonstrated using a RMS Average detector. Emissions shall be investigated up to the 10th harmonic of the fundamental. All other technical requirements shall be demonstrated utilizing the procedures specified in ANSI C63.26,⁴ as applicable.

EMISSION MASK

8.3.2.2 Limits

The transmitter output spectrum shall be within the mask defined in figure 4. This mask may also be used for analogue.


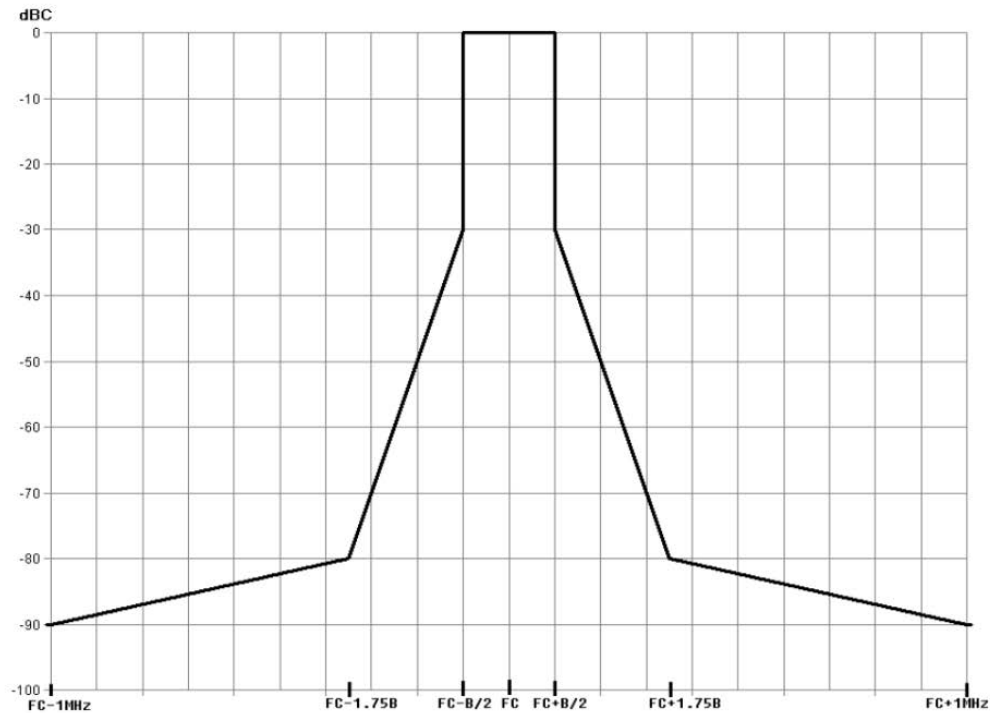


Figure 4: Spectrum mask for digital systems below 1 GHz

Procedure: ETSI EN 300 422-1 s. 8.3.2
KDB 971168 D01 Spurious Emissions at antenna term section 6
ANSI C63.26, 5.4.4 (using Test Setup from TIA 603-E 2.2.11, below)

Setup Diagram:

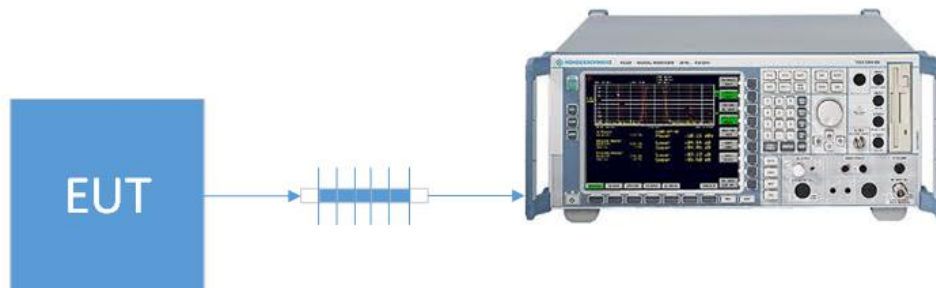


EMISSION MASK

Test Data: 614.075 MHz Emission Mask Plot



Ref Lvl	RBW	1 kHz	RF Att	20 dB
11 dBm	VBW	1 kHz	Unit	dBm
	SWT	5 s		

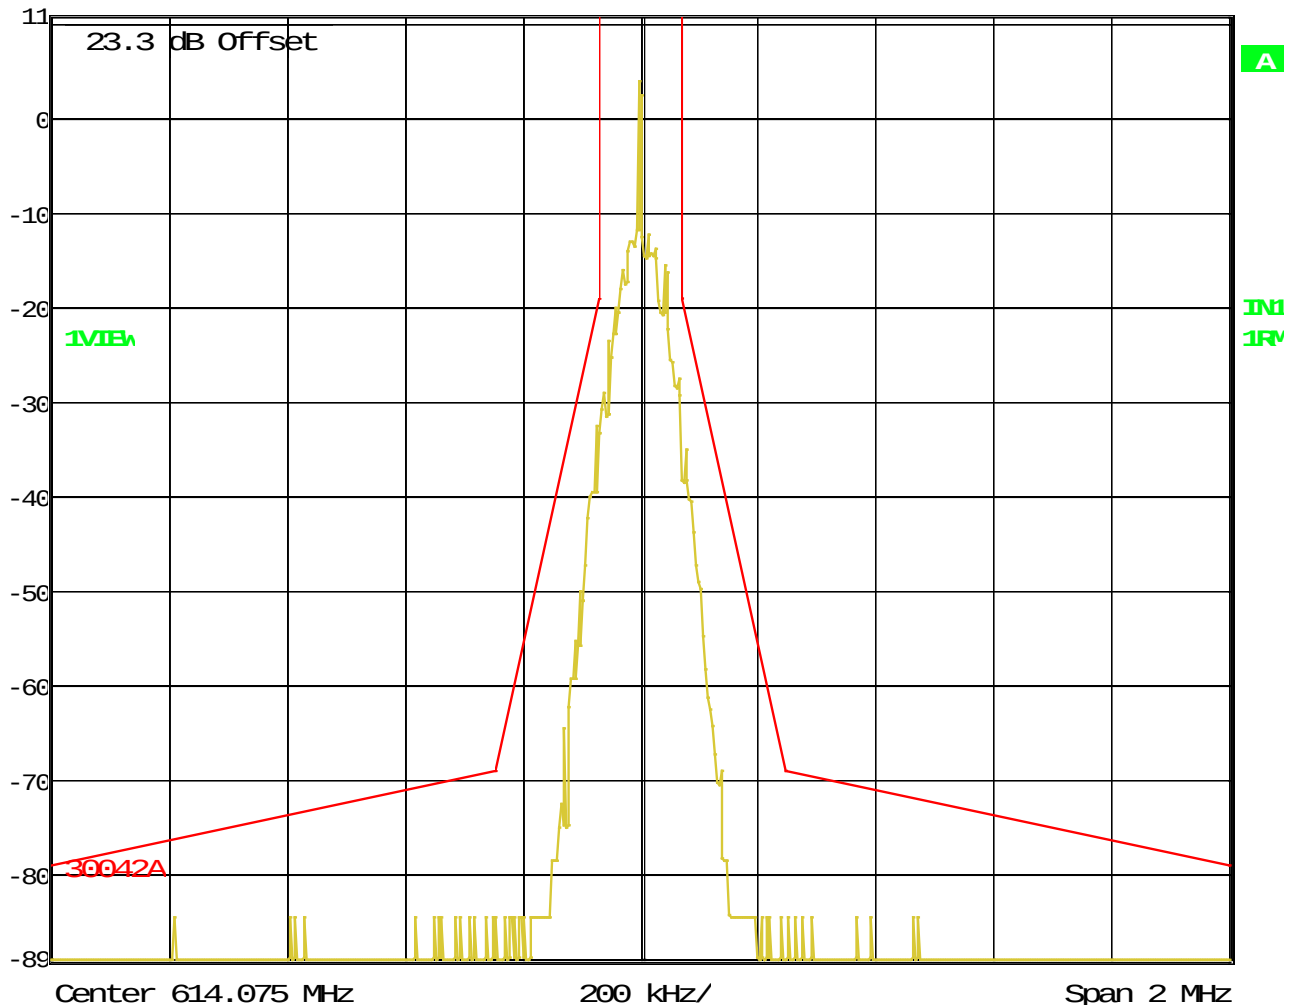


Date: 1. JAN. 1997 02:16:55

EMISSION MASK

Test Data: 615.925 MHz Emission Mask Plot



 Ref Lvl 11 dBm
 Marker 1 [T1] -89.00 dBm
 616.92500000 MHz
 RBW 1 kHz
 VBW 1 kHz
 SWT 5 s
 RF Att 20 dB
 Unit dBm

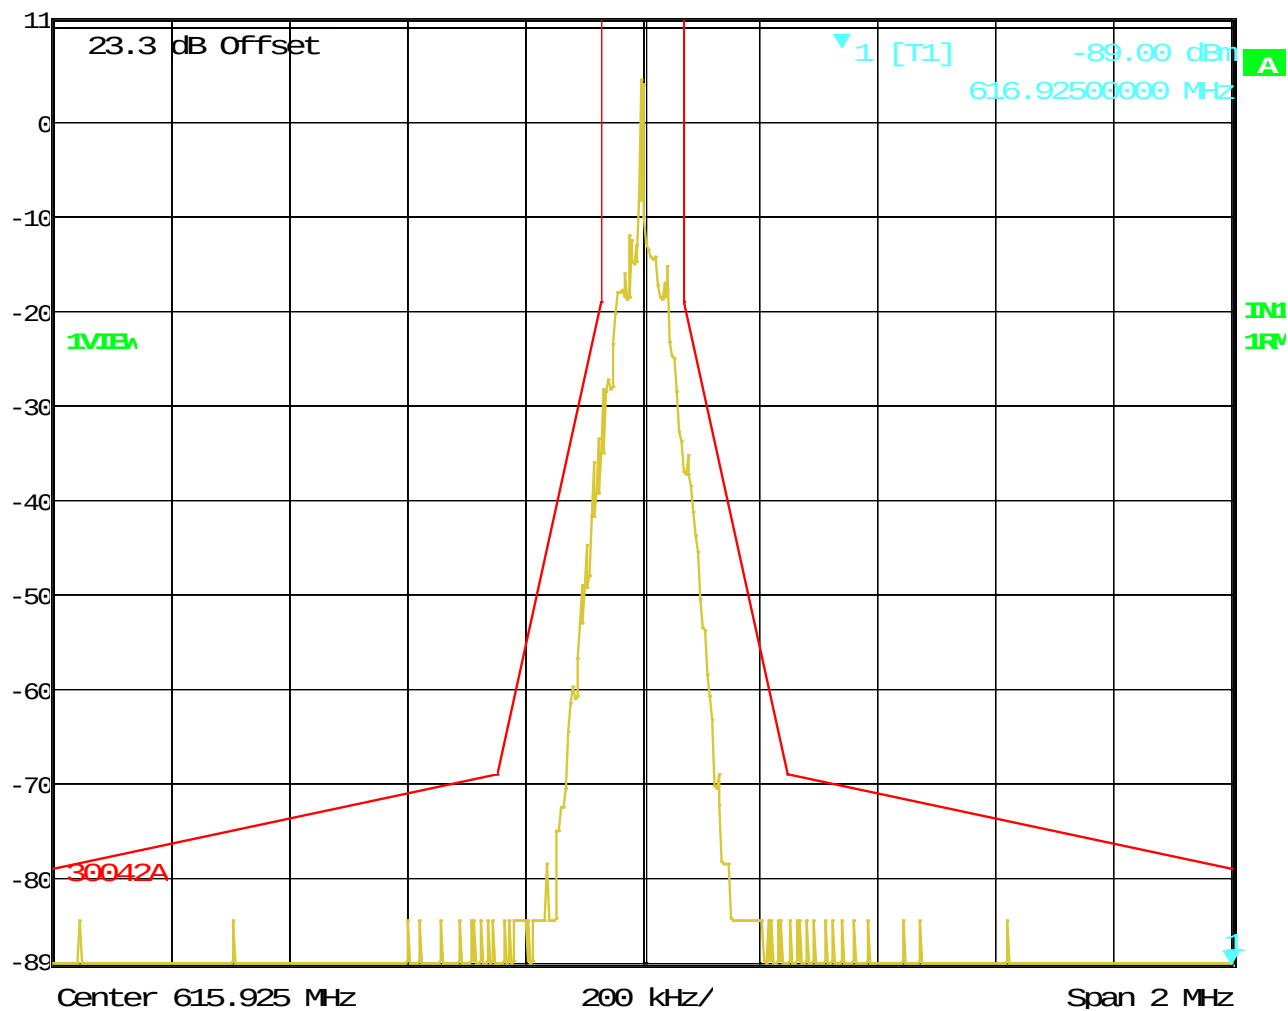

Date: 1.JAN.1997 02:14:16

EMISSION MASK

Test Data: 658 MHz Emission Mask Plot

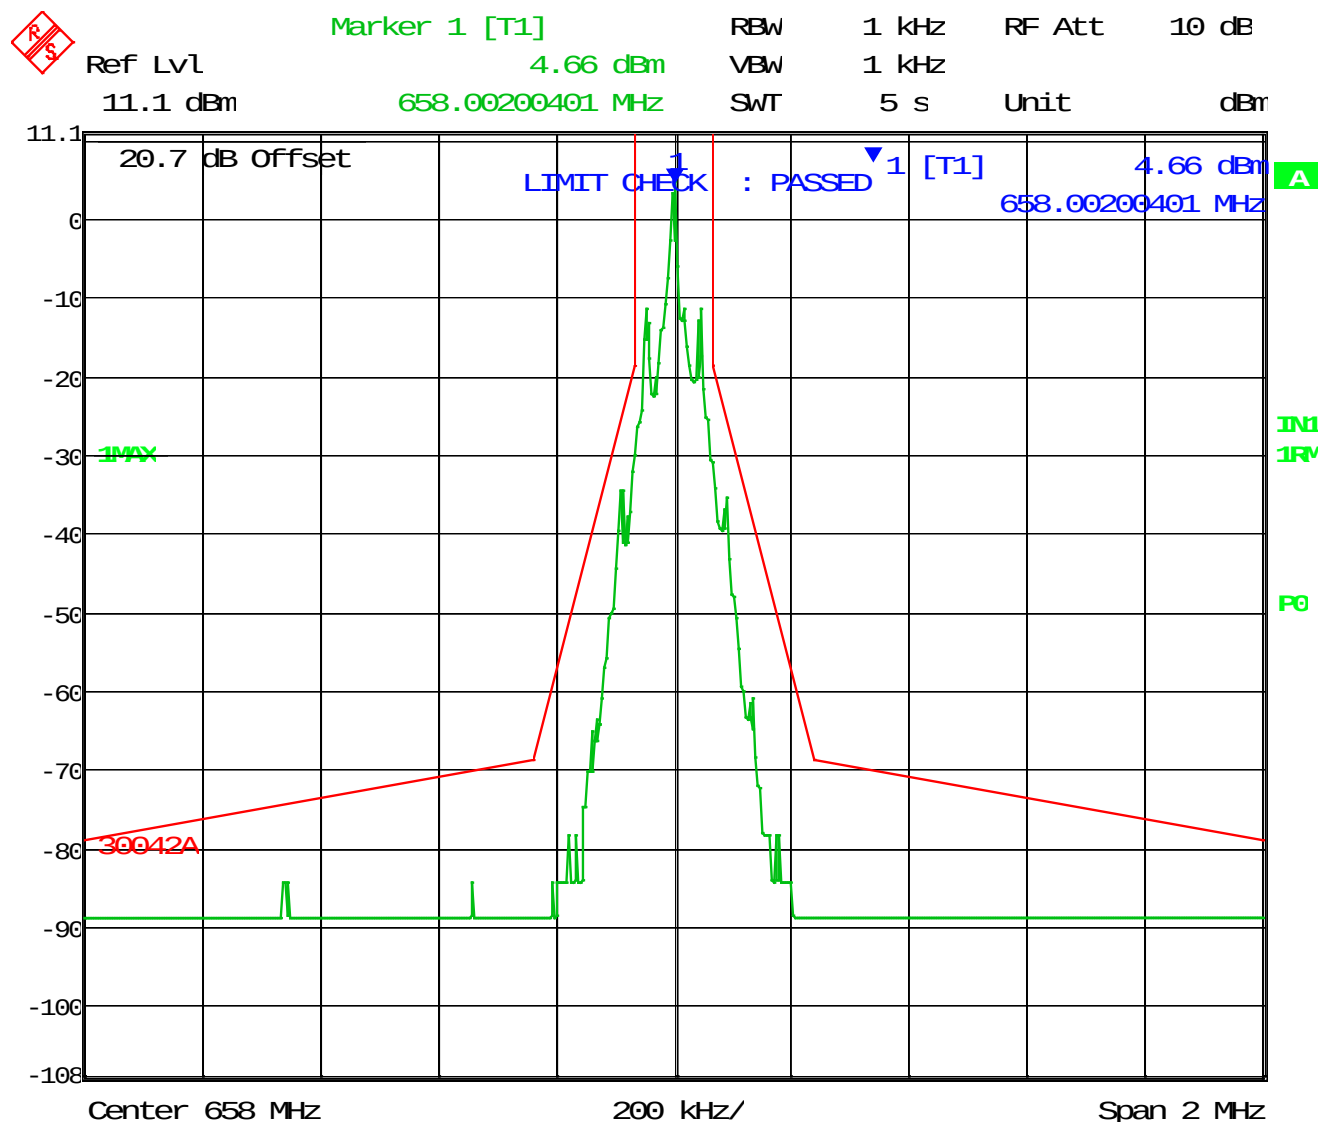


Date: 1.JAN.1997 03:21:22

EMISSION MASK

Test Data: 662.925 MHz Emission Mask Plot



Ref Lvl 11.1 dBm
 Marker 1 [T1] -0.42 dBm
 662.92299599 MHz
 RBW 1 kHz
 VBW 1 kHz
 SWT 5 s
 RF Att 10 dB
 Unit dBm

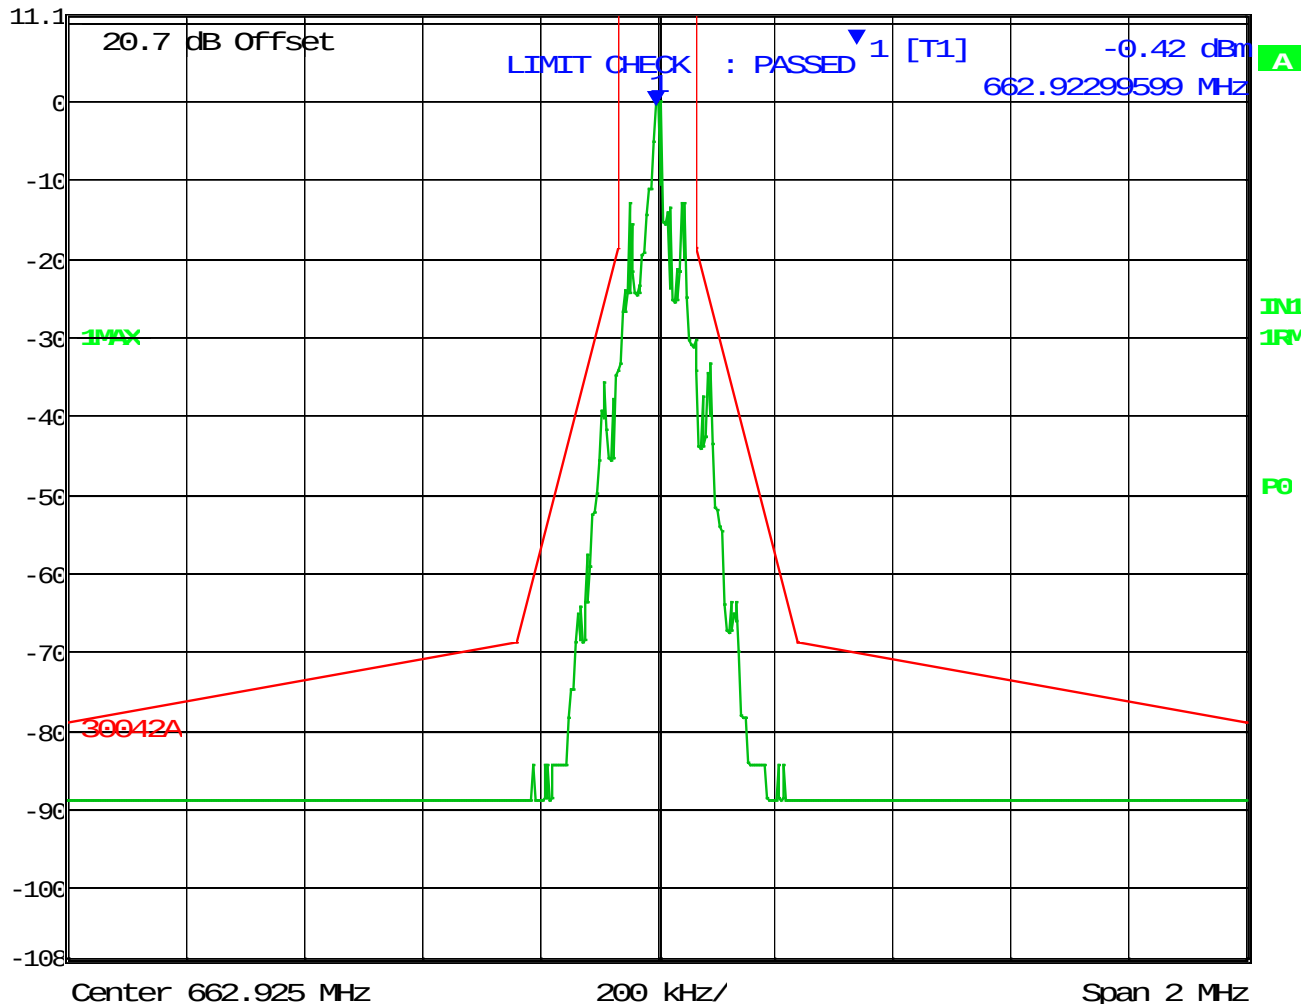

Date: 1.JAN.1997 03:20:16

FIELD STRENGTH OF SPURIOUS EMISSIONS

Rules Part No.: FCC Part 15.236 (g)

Requirements:


(g) Emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in §8.3 of ETSI EN 300 422-1 V1.4.2 (2011-08), *Electromagnetic compatibility and Radio spectrum Matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range; Part 1: Technical characteristics and methods of measurement*. Emissions outside of this band shall comply with the limits specified in section 8.4 of ETSI EN 300 422-1 V1.4.2 (2011-08).

State	Frequency		
	47 MHz to 74 MHz 87,5 MHz to 137 MHz 174 MHz to 230 MHz 470 MHz to 862 MHz	Other Frequencies below 1 000 MHz	Frequencies above 1 000 MHz
Operation	4 nW	250 nW	1 µW
Standby	2 nW	2 nW	20 nW

METHOD OF MEASUREMENT: The measuring receiver, as defined in table 4, shall be tuned over the frequency range 25 MHz to 4 GHz for equipment operating on frequencies below 1 GHz or in the frequency range of 25 MHz to 12,75 GHz for equipment operating on frequencies above 1 GHz.

Measurements were made at the test site of **Timco Engineering, Inc. located at 849 NW State Road 45, Newberry, FL 32669.**

Test Setup Diagram:

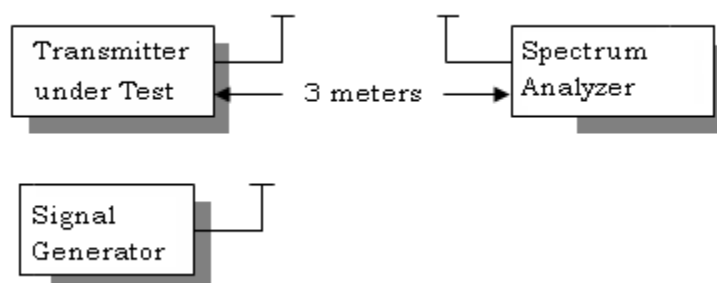

FIELD STRENGTH OF SPURIOUS EMISSIONS

Test Data: 614.075 MHz

Tuned Freq MHz	Emission Frequency MHz	Antenna Polarity	ERP (dBm)	Limit (dBm)	Margin (dB)
614.08	103.83	H	-82.812	-66	16.81
614.08	103.83	V	-79.202	-66	13.20
614.08	815.38	V	-76.146	-66	10.15
614.08	357.60	H	-84.849	-66	18.85
614.08	1228.15	H	-73.127	-60	13.13
614.08	1228.15	V	-70.810	-60	10.81
614.08	1842.23	H	-69.470	-60	9.47
614.08	1842.23	V	-74.217	-60	14.22
614.08	2456.30	H	-68.816	-60	8.82
614.08	2456.30	H	-68.026	-60	8.03
614.08	3070.38	H	-67.941	-60	7.94
614.08	3070.38	V	-65.511	-60	5.51
614.08	3684.45	V	-65.055	-60	5.06
614.08	3684.45	H	-64.155	-60	4.16

Result: Meets Requirements

FIELD STRENGTH OF SPURIOUS EMISSIONS

Test Data: 615.925 MHz

Tuned Freq MHz	Emission Frequency MHz	Antenna Polarity	ERP (dBm)	Limit	Margin (dB)
615.93	103.83	H	-82.222	-66	16.22
615.93	103.83	V	-78.612	-66	12.61
615.93	815.38	V	-75.556	-66	9.56
615.93	357.60	H	-84.259	-66	18.26
615.93	1231.85	H	-73.377	-60	13.38
615.93	1231.85	V	-71.060	-60	11.06
615.93	1847.78	H	-69.720	-60	9.72
615.93	1847.78	V	-74.467	-60	14.47
615.93	2463.70	H	-69.066	-60	9.07
615.93	2463.70	H	-68.276	-60	8.28
615.93	3079.63	H	-68.191	-60	8.19
615.93	3079.63	V	-65.761	-60	5.76
615.93	3695.55	V	-65.305	-60	5.31
615.93	3695.55	H	-64.405	-60	4.41

Result: Meets Requirements

FIELD STRENGTH OF SPURIOUS EMISSIONS

Test Data: 658.000 MHz

Tuned Freq MHz	Emission Frequency MHz	Antenna Polarity	ERP (dBm)	Limit (dBm)	Margin (dB)
658.00	103.83	H	-81.932	-66	15.93
658.00	103.83	V	-78.322	-66	12.32
658.00	815.38	V	-75.266	-66	9.27
658.00	357.60	H	-83.969	-66	17.97
658.00	1316.00	H	-73.177	-60	13.18
658.00	1316.00	V	-70.860	-60	10.86
658.00	1974.00	V	-69.520	-60	9.52
658.00	1974.00	H	-74.267	-60	14.27
658.00	2632.00	H	-68.866	-60	8.87
658.00	2632.00	H	-68.076	-60	8.08
658.00	3290.00	H	-67.991	-60	7.99
658.00	3290.00	V	-65.561	-60	5.56
658.00	3948.00	V	-65.105	-60	5.11
658.00	3948.00	H	-64.205	-60	4.21

Result: Meets Requirements

FIELD STRENGTH OF SPURIOUS EMISSIONS

Test Data: 662.925 MHz

Tuned Freq MHz	Emission Frequency MHz	Antenna Polarity	ERP (dBm)	Limit (dBm)	Margin (dB)
662.92	103.83	H	-82.432	-66	16.43
662.92	103.83	V	-78.822	-66	12.82
662.92	815.38	V	-75.766	-66	9.77
662.92	357.60	H	-84.469	-66	18.47
662.92	1325.85	H	-71.877	-60	11.88
662.92	1988.78	V	-69.560	-60	9.56
662.92	1988.78	H	-68.220	-60	8.22
662.92	1325.85	V	-72.967	-60	12.97
662.92	2651.70	H	-67.566	-60	7.57
662.92	2651.70	H	-66.776	-60	6.78
662.92	3314.63	H	-66.691	-60	6.69
662.92	3314.63	V	-64.261	-60	4.26
662.92	3977.55	V	-63.805	-60	3.81
662.92	3977.55	H	-62.905	-60	2.91

Result: Meets Requirements

FREQUENCY STABILITY

Rule Parts. No.: Part 2.1055, Part 74.861

Requirements: Temperature and voltage tests were performed to verify that the frequency remains within the .0050%,(50 ppm)

Method of Measurements: ANSI/TIA 603-C: 2004.

The test was conducted as follows: The transmitter was placed in the temperature chamber at 25 °C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15-second intervals. The worst case number used in the table below. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to -20 °C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15-second intervals. The worst-case number was again used in the table below. This procedure was repeated in 10-degree increments up to + 50 °C.

Test Data:

Temperature	Frequency MHz	Hz	PPM
25°C (reference)	470.07463		
-30°C	470.07501	380	0.808
-20°C	470.07496	330	0.702
-10°C	470.07494	310	0.659
0°C	470.0748	170	0.362
10°C	470.07476	130	0.277
20°C	470.07463	0	0.000
30°C	470.07461	-20	-0.043
40°C	470.07461	-20	-0.043
50°C	470.07459	-40	-0.085
Battery Voltage	Frequency	Hz	PPM
-15%	470.07463	0	0.000
15%	470.07462	-10	-0.021

Result: Meets Requirements

STATEMENT OF MEASUREMENT UNCERTAINTY

The data and results referenced in this document are true and accurate. The measurement uncertainty was calculated for all measurements listed in this test report according To CISPR 16-4 or ENTR 100-028 Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: “Uncertainty in EMC Measurements” and is documented in the Timco Engineering, Inc. quality system according to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Timco Engineering, Inc. is reported:

Test Items	Measurement Uncertainty	Notes
RF Frequency Accuracy	± 49.5 Hz	(1)
RF Conducted Power	± 0.93 dB	(1)
Conducted spurious emission of transmitter valid up to 40GHz	± 1.86 dB	
Occupied Bandwidth	± 2.65 %	
Audio Frequency Response	± 1.86 dB	
Modulation limiting	± 1.88 %	
Radiated RF Power	± 1.4 dB	
Maximum frequency deviation: Within 300 Hz and 6kHz of audio freq.	± 1.88 %	
Within 6kHz and 25kHz of audio Freq.	± 2.04 %	
Rad Emissions Sub Meth up to 26.5GHz	± 2.14 dB	
Adjacent channel power	± 1.47 dB	(1)
Transient Frequency Response	± 1.88 %	
Temperature	± 1.0 °C	(1)
Humidity	± 5.0 %	

Notes: (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

EMC EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
Sweep/Signal Generator	Anritsu	68369B	985112	11/08/17	11/08/19
EMI Test Receiver R & S ESIB 40 Screen Room	Rohde & Schwarz	ESIB 40	100274	08/16/16	08/16/19
Antenna: Biconical 1096	Eaton	94455-1	1096	08/01/17	08/01/19
Antenna: Log-Periodic 1122	Electro-Metrics	LPA-25	1122	07/26/17	07/26/19
Temperature Chamber LARGE	Tenney Engineering	TTRC	11717-7	N/A	N/A
Frequency Counter Small Chamber	HP	5385A	3242A07460	08/22/17	08/22/19
CHAMBER	Panashield	3M	N/A	12/31/17	12/31/19
Antenna: Double-Ridged Horn/ETS Horn 2	ETS-Lindgren	3117	00041534	03/01/17	03/01/19
Type K J Thermometer	Martel	303	080504494	11/02/17	11/02/19
Software: Field Strength Program	Timco	N/A	Version 4.10.7.0	N/A	N/A

*EMI RECEIVER SOFTWARE VERSION

The receiver firmware used was version 4.43 Service Pack 3

END OF TEST REPORT