



A D T

FCC TEST REPORT

REPORT NO.: RF110907E02R-2

MODEL NO.: AR5B22

FCC ID: PPD-AR5B22

IC: 4104A-AR5B22

RECEIVED: Jan. 23, 2013

TESTED: Jan. 29 to Feb. 04, 2013

ISSUED: Feb. 08, 2013

APPLICANT: Qualcomm Atheros, Inc.

ADDRESS: 1700 Technology Drive, San Jose, CA 95110

ISSUED BY: Bureau Veritas Consumer Products Services (H.K.)
Ltd., Taoyuan Branch Hsin Chu Laboratory

LAB ADDRESS: No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

TEST LOCATION (1): No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

TEST LOCATION (2): No.49, Ln. 206, Wende Rd., Shangshan Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

This report should not be used by the client to claim
product certification, approval, or endorsement by TAF
or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification

TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 CERTIFICATION	5
2 SUMMARY OF TEST RESULTS.....	6
2.1 MEASUREMENT UNCERTAINTY	7
3 GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT.....	8
3.2 DESCRIPTION OF ANTENNA.....	9
3.3 DESCRIPTION OF TEST MODES.....	10
3.4 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:	11
3.5 GENERAL DESCRIPTION OF APPLIED STANDARDS	13
3.6 DESCRIPTION OF SUPPORT UNITS	14
3.7 CONFIGURATION OF SYSTEM UNDER TEST.....	14
4 TEST PROCEDURES AND RESULTS	15
4.1 MAXIMUM PEAK OUTPUT POWER	15
4.1.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	15
4.1.2 INSTRUMENTS	15
4.1.3 TEST PROCEDURES	15
4.1.4 DEVIATION FROM TEST STANDARD	15
4.1.5 TEST SETUP	16
4.1.6 EUT OPERATING CONDITION	16
4.1.7 TEST RESULTS	17
4.2 AVERAGE OUTPUT POWER.....	19
4.2.1 FOR REFERENCE.....	19
4.2.2 INSTRUMENTS	19
4.2.3 TEST PROCEDURES	19
4.2.4 TEST SETUP	19
4.2.5 EUT OPERATING CONDITION	19
4.2.6 TEST RESULTS	20
4.3 RADIATED EMISSION MEASUREMENT	21
4.3.1 LIMITS OF RADIATED EMISSION MEASUREMENT	21
4.3.2 TEST INSTRUMENTS.....	22
4.3.3 TEST PROCEDURES	24
4.3.4 DEVIATION FROM TEST STANDARD	24
4.3.5 TEST SETUP	25
4.3.6 EUT OPERATING CONDITIONS.....	26
4.3.7 TEST RESULTS	27
4.4 CONDUCTED EMISSION MEASUREMENT	34
4.4.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	34
4.4.2 TEST INSTRUMENTS.....	34
4.4.3 TEST PROCEDURES	35
4.4.4 DEVIATION FROM TEST STANDARD	35
4.4.5 TEST SETUP	36
4.4.6 EUT OPERATING CONDITIONS.....	36
4.4.7 TEST RESULTS	37



A D T

5	PHOTOGRAPHS OF THE TEST CONFIGURATION	39
6	INFORMATION ON THE TESTING LABORATORIES.....	40
7	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	41



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF110907E02R-2	Original release	Feb. 08, 2013




A D T

1 CERTIFICATION

PRODUCT : PCIE 802.11a/b/g/n 2.4GHz/5GHz + USB BT 4.0 card
BRAND NAME : Atheros
MODEL NO. : AR5B22
TEST SAMPLE : R&D SAMPLE
APPLICANT : Qualcomm Atheros, Inc.
TESTED : Jan. 29 to Feb. 04, 2013
STANDARDS : FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10-2009
Canada RSS-210 Issue 8 (2010-12)
Canada RSS-Gen Issue 3 (2010-12)

The above equipment (Model: AR5B22) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and was in compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : , **DATE:** Feb. 08, 2013
(Lori Chung, Specialist)

APPROVED BY : , **DATE:** Feb. 08, 2013
(May Chen, Deputy Manager)

**A D T**

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C; RSS-210; RSS-Gen				
STANDARD SECTION		TEST TYPE AND LIMIT	RESULT	REMARK
FCC Part 15	RSS-Gen RSS-210			
15.207	RSS-Gen 7.2.4	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -6.90dB at 0.18906MHz.
15.247(b)	RSS-210 A8.4(2)	Maximum Peak Output Power	PASS	Meet the requirement of limit.
15.247(d)	RSS-210 A8.5	Transmitter Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -4.3dB at 597.20MHz.

NOTE:

1. Frequency Hopping System operating in 2400-2483.5MHz band and the output power less than 125mW. The hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of hopping channel whichever is greater.
2. This report is prepared for FCC class II change and IC reassessment change. Only conducted emission / radiated emission / conducted power were presented in this test report.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions	2.98 dB
Radiated emissions (30MHz-1GHz)	5.63 dB
Radiated emissions (1GHz -6GHz)	3.73 dB
Radiated emissions (6GHz -18GHz)	3.90 dB
Radiated emissions (18GHz -40GHz)	4.11 dB

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	PCIE 802.11a/b/g/n 2.4GHz/5GHz + USB BT 4.0 card
MODEL NO.	AR5B22
FCC ID	PPD-AR5B22
IC	4104A-AR5B22
POWER SUPPLY	DC 3.3V from host equipment
MODULATION TYPE	GFSK, $\pi/4$ -DQPSK, 8DPSK
MODULATION TECHNOLOGY	FHSS
OPRTAING FREQUENCY	2402MHz ~ 2480MHz
NUMBER OF CHANNEL	79
MAXIMUM OUTPUT POWER	GFSK: 2.094 mW 8DPSK: 4.315 mW
ANTENNA TYPE	See item 3.2
ANTENNA CONNECTOR	See item 3.2
DATA CABLE	NA
I/O PORTS	NA
ASSOCIATED DEVICES	NA

NOTE:

1. This report is prepared for FCC class II permissive change and IC reassessment change. The difference compared with the Report No.: RF110907E02I-2 R1 design is as the following information:
 - u Add shielded cover
 - u HW version CUS217
2. There are Bluetooth technology and WLAN technology used for the EUT. < the WLAN test data please refer to Report No. "RF110907E02R & RF110907E02R-1 ">
3. The Bluetooth supports version 4.0.
4. The device has three configurations (working mode)
 - a. WLAN only (2x2 MIMO)
 - b. BT+WLAN (2x2 MIMO) with reduced power on WLAN
 - c. BT+WLAN (1x1 mode on a/b/g only, chain 0 is used for BT and chain 1 is used for WLAN)

5. This device support the power back off (For WLAN only mode.) for WLAN/BT coexist mode. The WiFi output power will reduce 5dB from Maximum power for WLAN and BT simultaneously transmission.
6. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

3.2 DESCRIPTION OF ANTENNA

There is one set of antenna provided to this EUT, please refer to the following table:

No.	Brand	Model	Antenna Type	Connector	Antenna Gain (dBi)< included cable loss>			
					For 2.4GHz	For 5GHz (5.15~5.35)	For 5GHz (5.47~5.725)	For 5GHz (5.725~5.850)
1&2	WNC	81.EBJ15.005	PIFA	IPEX	3.62	3.08	4.76	4.76

Cable Loss:

No.	Brand	Model	Cable Loss(dB)				Cable Length
			For 2.4GHz	For 5GHz (5.15~5.35)	For 5GHz (5.47~5.725)	For 5GHz (5.725~5.850)	
1&2	WNC	81-EBJ15.005	1.15	1.70	1.74	1.79	300

Note: Above antenna gains of antenna are Total (H+V).

3.3 DESCRIPTION OF TEST MODES

For Bluetooth 2.1+ EDR: 79

Seventy-nine channels are provided to this EUT.

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

3.4 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	PLC	RE < 1G	RE ≥ 1G	APCM	
-	√	√	√	√	-

Where **PLC**: Power Line Conducted Emission

RE < 1G: Radiated Emission below 1GHz

RE ≥ 1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Type	Packet Type
0 to 78	78	8DPSK	DH5

Radiated Emission Test (Below 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Type	Packet Type
0 to 78	78	8DPSK	DH5

Radiated Emission Test (Above 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Type	Packet Type
0 to 78	0, 39, 78	GFSK	DH5
0 to 78	0, 39, 78	8DPSK	DH5

Antenna Port Conducted Measurement:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Type	Packet Type
0 to 78	0, 39, 78	GFSK	DH5
0 to 78	0, 39, 78	8DPSK	DH5

**TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (SYSTEM)	TESTED BY
PLC	25deg. C, 51%RH	120Vac, 60Hz	Jason Huang
RE ³ 1G	25deg. C, 72%RH	120Vac, 60Hz	Amos Chuang
RE<1G	23deg. C, 60%RH	120Vac, 60Hz	Amos Chuang
APCM	25deg. C, 60%RH	120Vac, 60Hz	Robert Cheng

3.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (Section 15.247)

558074 D01 DTS Meas Guidance

ANSI C63.10-2009

Canada RSS-210 Issue 8 (2010-12)

Canada RSS-Gen Issue 3 (2010-12)

All test items have been performed and recorded as per the above standards.

NOTE: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.6 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP32LA	FSLB32S	FCC DoC
2	EXTENSION CARD	Atheros	NA	NA	NA

No.	Signal cable description
1	NA
2	NA

Note: The power cords of the above support units were unshielded (1.8m).

3.7 CONFIGURATION OF SYSTEM UNDER TEST

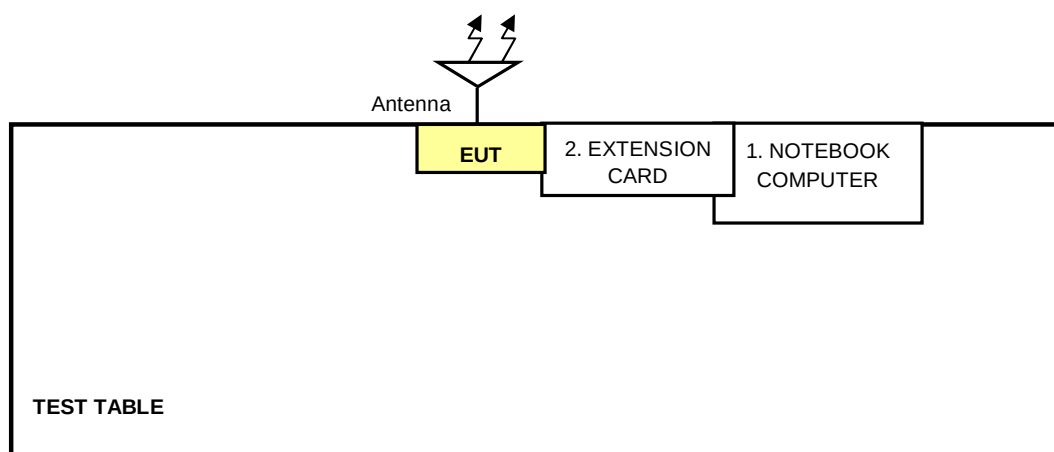

4 TEST PROCEDURES AND RESULTS

4.1 MAXIMUM PEAK OUTPUT POWER

4.1.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Limit is 125mW.

4.1.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
SPECTRUM ANALYZER R&S	FSP40	100036	Jan. 21, 2013	Jan. 20, 2014

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Feb. 04, 2013


4.1.3 TEST PROCEDURES

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. The center frequency of the spectrum analyzer is set to the fundamental frequency and using 3MHz RBW and 10 MHz VBW.
- d. Measure the captured power within the band and recording the plot.
- e. Repeat above procedures until all frequencies required were complete.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.




A D T

4.1.7 TEST RESULTS

CHANNEL	FREQUENCY (MHz)	OUTPUT POWER (mW)		OUTPUT POWER (dBm)		POWER LIMIT (mW)	PASS / FAIL
		GFSK	8DPSK	GFSK	8DPSK		
0	2402	1.897	3.908	2.78	5.92	125	PASS
39	2441	2.065	4.256	3.15	6.29	125	PASS
78	2480	2.094	4.315	3.21	6.35	125	PASS


For GFSK

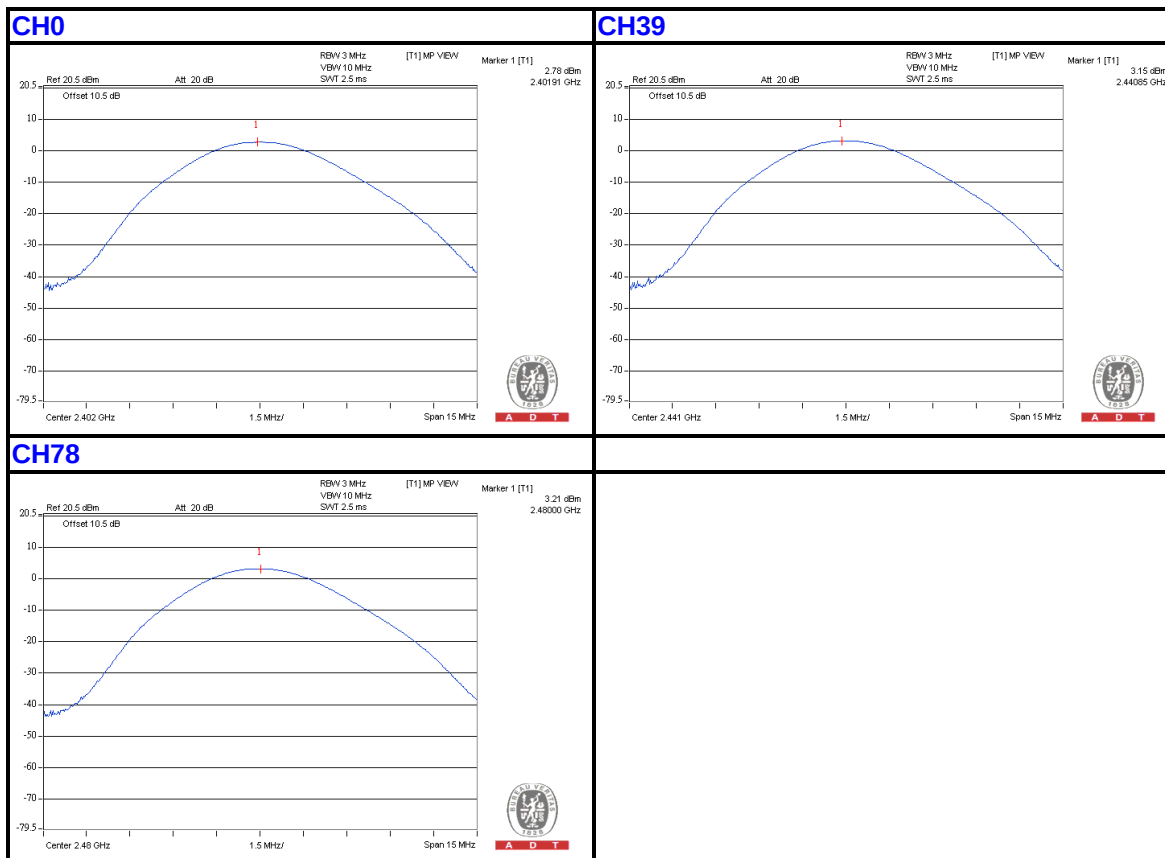



A D T

For 8DPSK

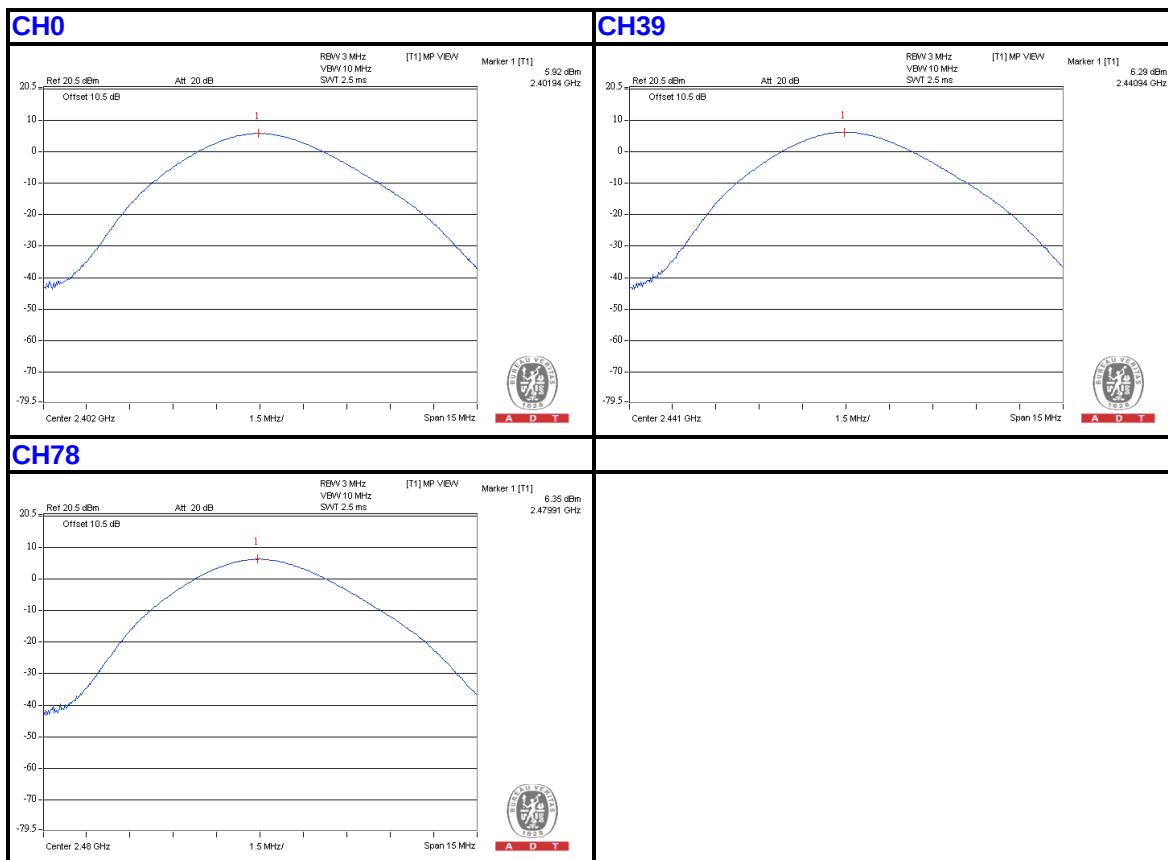

4.2 AVERAGE OUTPUT POWER

4.2.1 FOR REFERENCE.

4.2.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Power Meter	ML2495A	0824006	May 10, 2012	May 09, 2013
Average Power Sensor	MA2411B	0738172	May 10, 2012	May 09, 2013


Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Feb. 04, 2013

4.2.3 TEST PROCEDURES

1. The transmitter output was connected to the power meter through an attenuator, the bandwidth of the fundamental frequency was measured with the power meter.
2. Record the average power level.

4.2.4 TEST SETUP

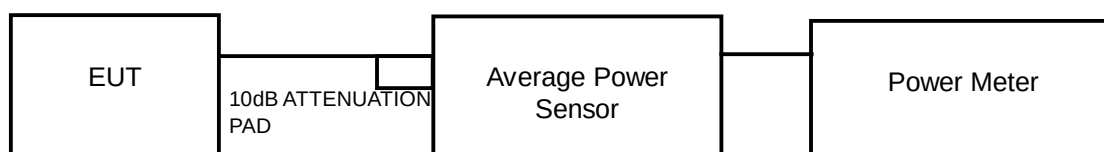

4.2.5 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.



4.2.6 TEST RESULTS

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER OUTPUT (dBm)	
		GFSK	8DPSK
0	2402	2.6	2.71
39	2441	3.17	3.46
78	2480	3.19	3.49

4.3 RADIATED EMISSION MEASUREMENT

4.3.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	$2400/F(\text{kHz})$	300
0.490 ~ 1.705	$24000/F(\text{kHz})$	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = $20 \log$ Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

**A D T**

4.3.2 TEST INSTRUMENTS

Below 1GHz test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer Agilent	E4446A	MY48250254	July 09, 2012	July 08, 2013
Pre-Selector Agilent	N9039A	MY46520311	July 09, 2012	July 08, 2013
Signal Generator Agilent	N5181A	MY49060517	July 09, 2012	July 08, 2013
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-03	Nov. 14, 2012	Nov. 13, 2013
Pre-Amplifier Agilent	8449B	3008A02578	June 26, 2012	June 25, 2013
Pre-Amplifier SPACEK LABS	SLKKa-48-6	9K16	Nov. 14, 2012	Nov. 13, 2013
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-360	Apr. 09, 2012	Apr. 08, 2013
Horn_Antenna AISI	AIH.8018	0000320091110	Nov. 19, 2012	Nov. 18, 2013
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Oct. 12, 2012	Oct. 11, 2013
RF Cable	NA	RF104-201 RF104-203 RF104-204	Dec. 25, 2012	Dec. 24, 2013
RF Cable	NA	CHGCAB_001	Oct. 06, 2012	Oct. 05, 2013
Software	ADT_Radiated _V8.7.05	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
- 3 The test was performed in 966 Chamber No. G.
4. The FCC Site Registration No. is 966073.
- 5 The VCCI Site Registration No. is G-137.
- 6 The CANADA Site Registration No. is IC 7450H-2.
- 7 Tested Date: Jan. 29, 2013



A D T

Above 1GHz test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer Agilent	E4446A	MY48250253	Sep. 03, 2012	Sep. 02, 2013
Pre-Selector Agilent	N9039A	MY46520310	Sep. 03, 2012	Sep. 02, 2013
Signal Generator Agilent	N5181A	MY49060347	July 24, 2012	July 23, 2013
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-04	Nov. 14, 2012	Nov. 13, 2013
Pre-Amplifier Agilent	8449B	3008A02465	Feb. 27, 2012	Feb. 26, 2013
SPACEK LABS	SLKKa-48-6	9K16	Nov. 14, 2012	Nov. 13, 2013
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-361	Apr. 06, 2012	Apr. 05, 2013
Horn_Antenna AISI	AIH.8018	0000220091110	Nov. 27, 2012	Nov. 26, 2013
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Oct. 12, 2012	Oct. 11, 2013
RF Cable	NA	RF104-205 RF104-207 RF104-202	Dec. 26, 2012	Dec. 25, 2013
RF Cable	NA	CHHCAB_001	Oct. 07, 2012	Oct. 06, 2013
Software	ADT_Radiated _V8.7.05	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
- 3 The test was performed in 966 Chamber No. H.
4. The FCC Site Registration No. is 797305.
- 5 The CANADA Site Registration No. is IC 7450H-3.
- 6 Tested Date: Feb. 04, 2013

4.3.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.3.4 DEVIATION FROM TEST STANDARD


No deviation

4.3.5 TEST SETUP

<Frequency Range below 1GHz>

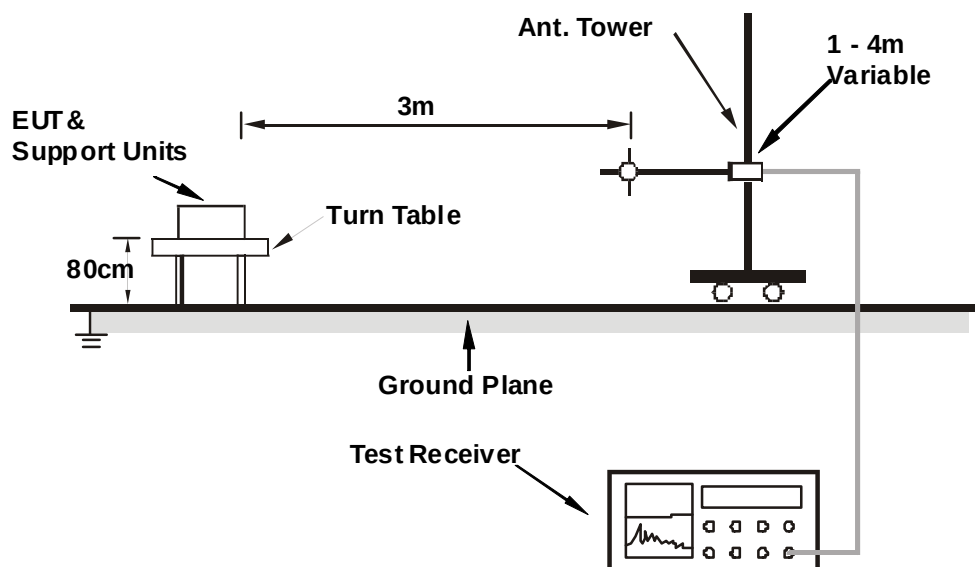

<Frequency Range above 1GHz>

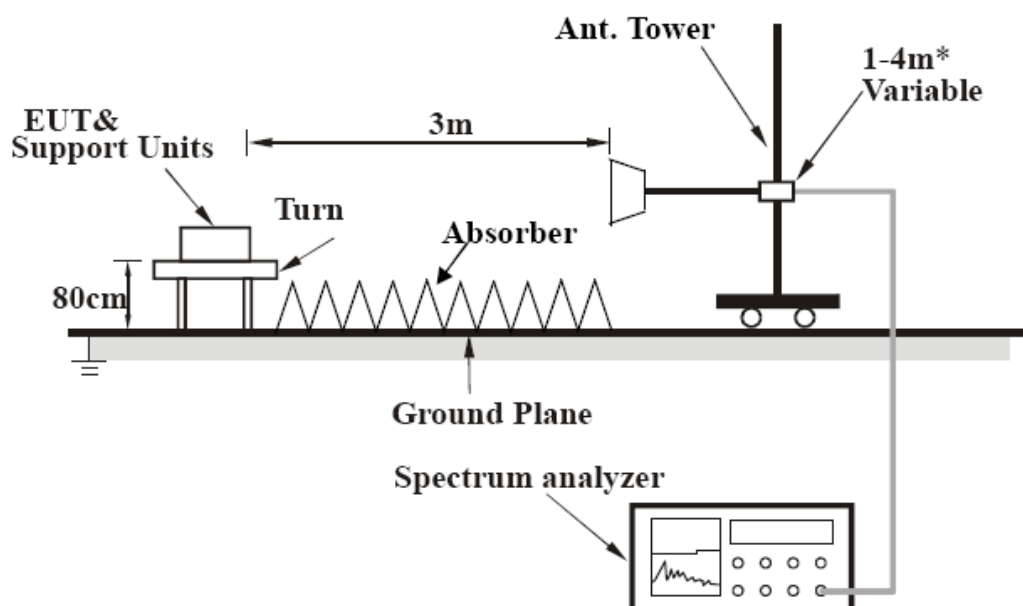

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.3.6 EUT OPERATING CONDITIONS

1. Connect the EUT with the support unit 1 (Notebook Computer) which is placed on a testing table.
2. The communication partner run test program “artgui.exe” to enable EUT under transmission/receiving condition continuously at specific channel frequency.



A D T

4.3.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA

BT_8DPSK

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	100.00	35.0 QP	43.5	-8.5	1.00 H	181	25.15	9.88
2	162.00	37.6 QP	43.5	-5.9	1.00 H	100	23.43	14.21
3	300.00	38.7 QP	46.0	-7.3	1.90 H	80	23.43	15.29
4	600.40	40.6 QP	46.0	-5.4	1.00 H	336	17.93	22.67
5	802.00	41.5 QP	46.0	-4.5	1.00 H	14	15.53	25.95
6	871.40	37.9 QP	46.0	-8.1	1.00 H	230	10.86	27.07
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	38.83	28.4 QP	40.0	-11.6	1.19 V	81	14.71	13.66
2	176.69	34.9 QP	43.5	-8.6	1.73 V	212	21.66	13.25
3	300.69	34.4 QP	46.0	-11.6	1.45 V	98	19.06	15.31
4	402.69	35.8 QP	46.0	-10.2	1.13 V	286	17.89	17.93
5	597.20	41.7 QP	46.0	-4.3	1.35 V	226	19.12	22.60
6	760.00	37.4 QP	46.0	-8.6	1.73 V	142	12.33	25.11

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.



A D T

ABOVE 1GHz DATA

BT_GFSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2322.00	57.6 PK	74.0	-16.4	1.08 H	112	25.04	32.56
2	2322.00	47.4 AV	54.0	-6.6	1.08 H	112	14.84	32.56
3	*2402.00	98.6 PK			1.05 H	112	65.78	32.82
4	*2402.00	90.9 AV			1.05 H	112	58.08	32.82
5	4804.00	50.6 PK	74.0	-23.4	1.00 H	156	8.35	42.25
6	4804.00	38.1 AV	54.0	-15.9	1.00 H	156	-4.15	42.25
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2322.00	57.7 PK	74.0	-16.3	1.38 V	234	25.14	32.56
2	2322.00	45.4 AV	54.0	-8.6	1.38 V	234	12.84	32.56
3	*2402.00	95.6 PK			1.38 V	233	62.78	32.82
4	*2402.00	90.1 AV			1.38 V	233	57.28	32.82
5	4804.00	50.9 PK	74.0	-23.1	1.00 V	81	8.65	42.25
6	4804.00	37.9 AV	54.0	-16.1	1.00 V	81	-4.35	42.25

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2361.00	58.5 PK	74.0	-15.5	1.01 H	106	25.81	32.69
2	2361.00	48.4 AV	54.0	-5.6	1.01 H	106	15.71	32.69
3	*2441.00	98.9 PK			1.00 H	110	65.98	32.92
4	*2441.00	91.1 AV			1.00 H	110	58.18	32.92
5	2483.50	58.1 PK	74.0	-15.9	1.01 H	106	25.07	33.03
6	2483.50	45.2 AV	54.0	-8.8	1.01 H	106	12.17	33.03
7	4882.00	50.5 PK	74.0	-23.5	1.00 H	150	8.18	42.32
8	4882.00	37.9 AV	54.0	-16.1	1.00 H	150	-4.42	42.32
9	7323.00	53.9 PK	74.0	-20.1	1.00 H	170	6.91	46.99
10	7323.00	42.3 AV	54.0	-11.7	1.00 H	170	-4.69	46.99
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2361.00	58.6 PK	74.0	-15.4	1.37 V	248	25.91	32.69
2	2361.00	47.5 AV	54.0	-6.5	1.37 V	248	14.81	32.69
3	*2441.00	97.8 PK			1.37 V	248	64.88	32.92
4	*2441.00	90.4 AV			1.37 V	248	57.48	32.92
5	2483.50	57.7 PK	74.0	-16.3	1.37 V	248	24.67	33.03
6	2483.50	45.1 AV	54.0	-8.9	1.37 V	248	12.07	33.03
7	4882.00	49.5 PK	74.0	-24.5	1.00 V	68	7.18	42.32
8	4882.00	37.7 AV	54.0	-16.3	1.00 V	68	-4.62	42.32
9	7323.00	53.7 PK	74.0	-20.3	1.00 V	155	6.71	46.99
10	7323.00	42.1 AV	54.0	-11.9	1.00 V	155	-4.89	46.99

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	98.8 PK			1.00 H	111	65.78	33.02
2	*2480.00	91.1 AV			1.00 H	111	58.08	33.02
3	2483.50	58.1 PK	74.0	-15.9	1.00 H	113	25.07	33.03
4	2483.50	45.3 AV	54.0	-8.7	1.00 H	113	12.27	33.03
5	4960.00	49.8 PK	74.0	-24.2	1.00 H	155	7.50	42.30
6	4960.00	37.6 AV	54.0	-16.4	1.00 H	155	-4.70	42.30
7	7440.00	54.3 PK	74.0	-19.7	1.00 H	165	7.01	47.29
8	7440.00	42.7 AV	54.0	-11.3	1.00 H	165	-4.59	47.29
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	98.5 PK			1.37 V	246	65.48	33.02
2	*2480.00	90.3 AV			1.37 V	246	57.28	33.02
3	2483.50	58.0 PK	74.0	-16.0	1.37 V	246	24.97	33.03
4	2483.50	45.2 AV	54.0	-8.8	1.37 V	246	12.17	33.03
5	4960.00	49.3 PK	74.0	-24.7	1.00 V	68	7.00	42.30
6	4960.00	37.5 AV	54.0	-16.5	1.00 V	68	-4.80	42.30
7	7440.00	53.5 PK	74.0	-20.5	1.00 V	141	6.21	47.29
8	7440.00	42.1 AV	54.0	-11.9	1.00 V	141	-5.19	47.29

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



A D T

BT_8DPSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2322.00	57.6 PK	74.0	-16.4	1.11 H	113	25.04	32.56
2	2322.00	46.8 AV	54.0	-7.2	1.11 H	113	14.24	32.56
3	*2402.00	100.1 PK			1.05 H	111	67.28	32.82
4	*2402.00	89.5 AV			1.05 H	111	56.68	32.82
5	4804.00	50.3 PK	74.0	-23.7	1.00 H	154	8.05	42.25
6	4804.00	37.6 AV	54.0	-16.4	1.00 H	154	-4.65	42.25
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2322.00	57.4 PK	74.0	-16.6	1.42 V	249	24.84	32.56
2	2322.00	46.1 AV	54.0	-7.9	1.42 V	249	13.54	32.56
3	*2402.00	98.2 PK			1.42 V	249	65.38	32.82
4	*2402.00	88.1 AV			1.42 V	249	55.28	32.82
5	4804.00	50.1 PK	74.0	-23.9	1.00 V	72	7.85	42.25
6	4804.00	37.5 AV	54.0	-16.5	1.00 V	72	-4.75	42.25

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2361.00	58.4 PK	74.0	-15.6	1.03 H	108	25.71	32.69
2	2361.00	48.1 AV	54.0	-5.9	1.03 H	108	15.41	32.69
3	*2441.00	100.2 PK			1.00 H	108	67.28	32.92
4	*2441.00	89.9 AV			1.00 H	108	56.98	32.92
5	2483.50	58.6 PK	74.0	-15.4	1.03 H	108	25.57	33.03
6	2483.50	45.3 AV	54.0	-8.7	1.03 H	108	12.27	33.03
7	4882.00	50.0 PK	74.0	-24.0	1.00 H	145	7.68	42.32
8	4882.00	37.5 AV	54.0	-16.5	1.00 H	145	-4.82	42.32
9	7323.00	54.9 PK	74.0	-19.1	1.00 H	166	7.91	46.99
10	7323.00	42.8 AV	54.0	-11.2	1.00 H	166	-4.19	46.99
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2361.00	57.3 PK	74.0	-16.7	1.39 V	248	24.61	32.69
2	2361.00	46.8 AV	54.0	-7.2	1.39 V	248	14.11	32.69
3	*2441.00	99.1 PK			1.39 V	248	66.18	32.92
4	*2441.00	88.9 AV			1.39 V	248	55.98	32.92
5	2483.50	57.3 PK	74.0	-16.7	1.39 V	248	24.27	33.03
6	2483.50	45.1 AV	54.0	-8.9	1.39 V	248	12.07	33.03
7	4882.00	49.6 PK	74.0	-24.4	1.00 V	71	7.28	42.32
8	4882.00	37.4 AV	54.0	-16.6	1.00 V	71	-4.92	42.32
9	7323.00	54.3 PK	74.0	-19.7	1.00 V	152	7.31	46.99
10	7323.00	42.6 AV	54.0	-11.4	1.00 V	152	-4.39	46.99

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	100.2 PK			1.00 H	108	67.18	33.02
2	*2480.00	89.8 AV			1.00 H	108	56.78	33.02
3	2483.50	57.8 PK	74.0	-16.2	1.00 H	108	24.77	33.03
4	2483.50	45.3 AV	54.0	-8.7	1.00 H	108	12.27	33.03
5	4960.00	50.2 PK	74.0	-23.8	1.00 H	150	7.90	42.30
6	4960.00	37.6 AV	54.0	-16.4	1.00 H	150	-4.70	42.30
7	7440.00	54.5 PK	74.0	-19.5	1.00 H	167	7.21	47.29
8	7440.00	42.8 AV	54.0	-11.2	1.00 H	167	-4.49	47.29
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2480.00	100.1 PK			1.38 V	246	67.08	33.02
2	*2480.00	89.5 AV			1.38 V	246	56.48	33.02
3	2483.50	57.6 PK	74.0	-16.4	1.38 V	246	24.57	33.03
4	2483.50	45.2 AV	54.0	-8.8	1.38 V	246	12.17	33.03
5	4960.00	49.9 PK	74.0	-24.1	1.00 V	69	7.60	42.30
6	4960.00	37.5 AV	54.0	-16.5	1.00 V	69	-4.80	42.30
7	7440.00	54.1 PK	74.0	-19.9	1.00 V	149	6.81	47.29
8	7440.00	42.7 AV	54.0	-11.3	1.00 V	149	-4.59	47.29

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

4.4 CONDUCTED EMISSION MEASUREMENT

4.4.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:** 1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver	ESCS 30	100375	Mar. 12, 2012	Mar. 11, 2013
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK8127	8127-522	Sep. 06, 2012	Sep. 05, 2013
Line-Impedance Stabilization Network (for Peripheral)	ENV216	100072	June 08, 2012	June 07, 2013
RF Cable (JYEBAO)	5DFB	COCCAB-001	Aug. 28, 2012	Aug. 27, 2013
50 ohms Terminator	50	EMC-3	Sep. 25, 2012	Sep. 24, 2013
Software ADT	BV ADT_Cond_V7.3.7.3	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.
4. Tested Date: Jan. 30, 2013

4.4.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN.
- b. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- c. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- d. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit – 20dB) were not recorded.


NOTE:

1. The resolution bandwidth of test receiver is 9kHz for Quasi-peak detection (QP) & Average detection (AV).

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP

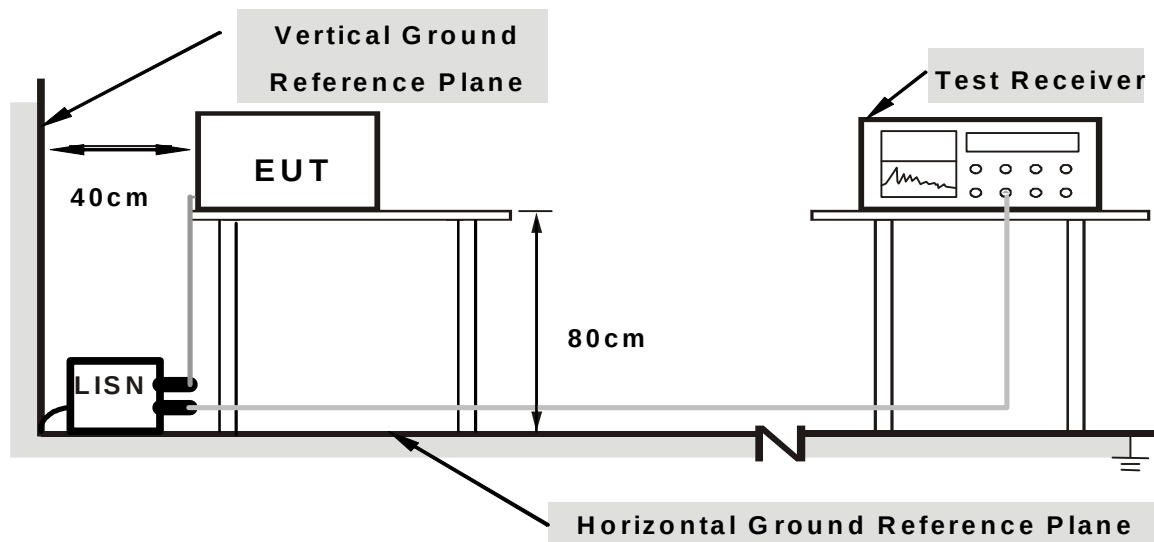

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.4.6 EUT OPERATING CONDITIONS

Same as the 4.3.6


4.4.7 TEST RESULTS

PHASE	Line (L)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor [dB]	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	(dB)	(dB)
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	0.11	48.37	19.43	48.48	19.54	65.79	55.79	-17.31	-36.25
2	0.18906	0.12	53.46	47.06	53.58	47.18	64.08	54.08	-10.50	-6.90
3	0.25547	0.13	46.11	39.68	46.24	39.81	61.58	51.58	-15.34	-11.77
4	0.31797	0.14	39.87	35.18	40.01	35.32	59.76	49.76	-19.75	-14.44
5	0.38047	0.16	37.37	33.46	37.53	33.62	58.27	48.27	-20.74	-14.65
6	0.50572	0.17	33.92	31.67	34.09	31.84	56.00	46.00	-21.91	-14.16

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

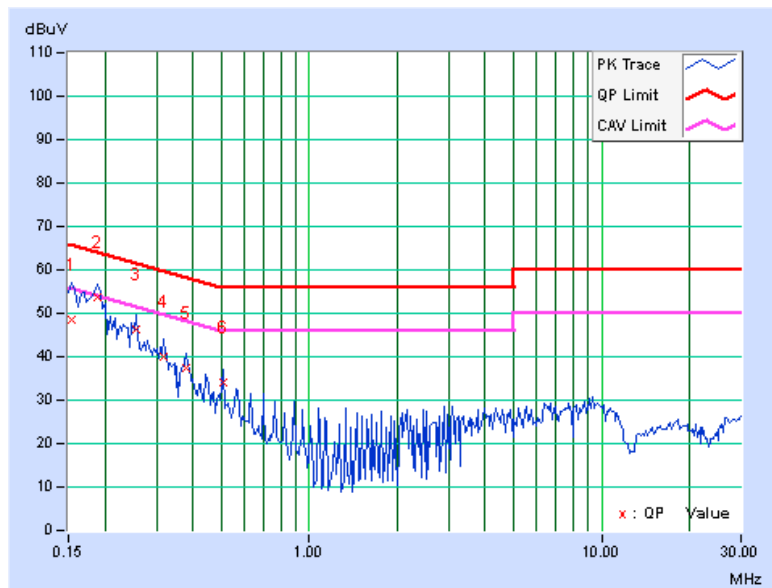


PHASE	Neutral (N)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	0.09	48.95	20.03	49.04	20.12	65.79	55.79	-16.75	-35.67
2	0.19297	0.10	52.07	45.51	52.17	45.61	63.91	53.91	-11.74	-8.30
3	0.25156	0.11	46.62	40.13	46.73	40.24	61.71	51.71	-14.97	-11.46
4	0.31981	0.13	38.22	33.37	38.35	33.50	59.71	49.71	-21.36	-16.21
5	0.38047	0.15	37.64	33.65	37.79	33.80	58.27	48.27	-20.48	-14.47
6	0.50938	0.15	32.84	30.22	32.99	30.37	56.00	46.00	-23.01	-15.63

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

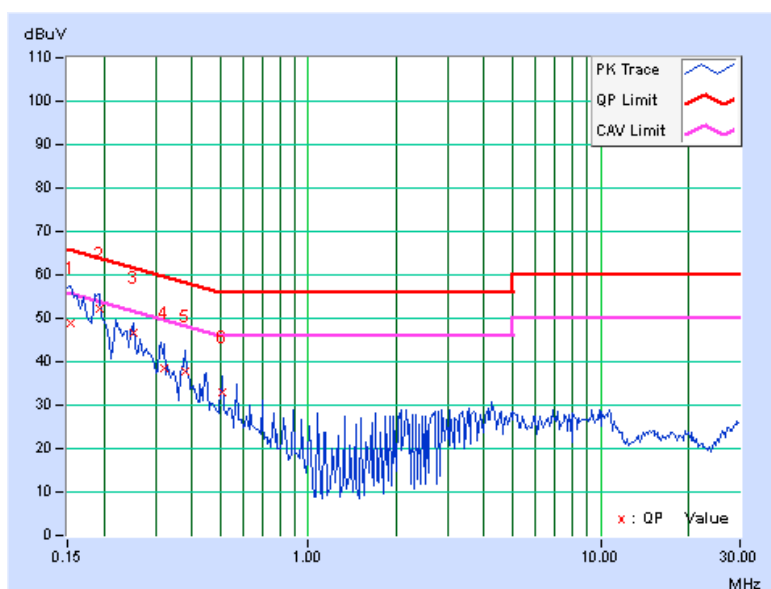

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

6 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

7 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

--- END ---