



**FCC CFR47 CLASS II PERMISSIVE CHANGE
CERTIFICATION
TEST REPORT**

FOR

AR5BXB6 802.11abg PCI Express Module

MODEL NUMBER: AR5BXB6

FCC ID: PPD- AR5BXB6-M

REPORT NUMBER: 05U3787-1

ISSUE DATE: DECEMBER 20, 2005

Prepared for
**ATHEROS COMMUNICATIONS INC.
5480 GREAT AMERICA PARKWAY
SANTA CLARA, CA 95054
U.S.A.**

Prepared by
**COMPLIANCE CERTIFICATION SERVICES
561F MONTEREY ROAD,
MORGAN HILL, CA 95037, USA
TEL: (408) 463-0885
FAX: (408) 463-0888**

NVLAP[®]
LAB CODE:200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
A	12/20/05	Initial Issue	DG

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY.....	5
4.1. MEASURING INSTRUMENT CALIBRATION.....	5
4.2. MEASUREMENT UNCERTAINTY.....	5
5. EQUIPMENT UNDER TEST.....	6
5.1. DESCRIPTION OF EUT	6
5.2. DESCRIPTION OF CLASS II PERMISSIVE CHANGE.....	6
5.3. DESCRIPTION OF AVAILABLE ANTENNAS.....	6
5.4. SOFTWARE AND FIRMWARE	6
5.5. WORST-CASE CONFIGURATION AND MODE.....	6
5.6. DESCRIPTION OF TEST SETUP	7
6. TEST AND MEASUREMENT EQUIPMENT	11
6.1.1. PEAK OUTPUT POWER 2400 – 2483.5 MHz BAND	12
6.1.2. PEAK OUTPUT POWER 5725-5850 MHz BAND.....	20
6.2. RADIATED EMISSIONS.....	25
6.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS	25
6.2.2. TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND.....	27
6.2.3. TRANSMITTER ABOVE 1 GHz FOR 5725 TO 5850 MHz BAND.....	45
6.2.4. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz	46
6.2.5. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz	54
7. SETUP PHOTOS.....	58

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: ATHEROS COMMUNICATIONS INC.
5480 GREAT AMERICA PARKWAY
SANTA CLARA, CA 95054

EUT DESCRIPTION: AR5BXB6 802.11abg PCI Express Module

MODEL: AR5BXB6

SERIAL NUMBER: 6F54500CMU4FE

DATE TESTED: DECEMBER 2 - DECEMBER 14, 2005

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.


Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:

Tested By:



DAVID GARCIA
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES



VIEN TRAN
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is an 802.11 a/b/g transceiver.

The radio module is manufactured by Atheros Communications Inc..

5.2. DESCRIPTION OF CLASS II PERMISSIVE CHANGE

Added new antenna model:

Tyco P/N: 631-0153 12-5, inverted F type.

Full antenna details are included in a separate exhibit.

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes two dual band inverted F antennas on a flexible substrate for diversity, each with a maximum gain of 4.06 dBi.

5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was Devlib Revision 5.3, rev. Build #15.

The EUT driver software installed in the Apple 15" PowerBook equipment during testing was Apple80211, rev. 12_5_05. The serial number of the PowerBook is SW854600JUNO.

The test utility software used during testing was moma, rev. M35aFred_12_5_05.

5.5. WORST-CASE CONFIGURATION AND MODE

The worst-case channel is determined as the channel with the highest output power. The highest measured output power was at 2437 MHz and was.

The worst-case data rate for this channel is determined to be 6 Mb/s, based on previous experience with AR5BXB6 WLAN product design architectures.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop PC	Apple	PowerBook	SW854600JUNO	DOC
AC Adapter	Delta	ADP90UBC	MV54207YSCN	N/A

I/O CABLES


I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	AC	Unshielded	1.7	
2	DC	1	DC	Shielded	1.7	

TEST SETUP

The EUT is installed in a host laptop computer via its internal Mini PCIe slot during the tests. Test software exercised the radio card.

SETUP DIAGRAM FOR TESTS

=

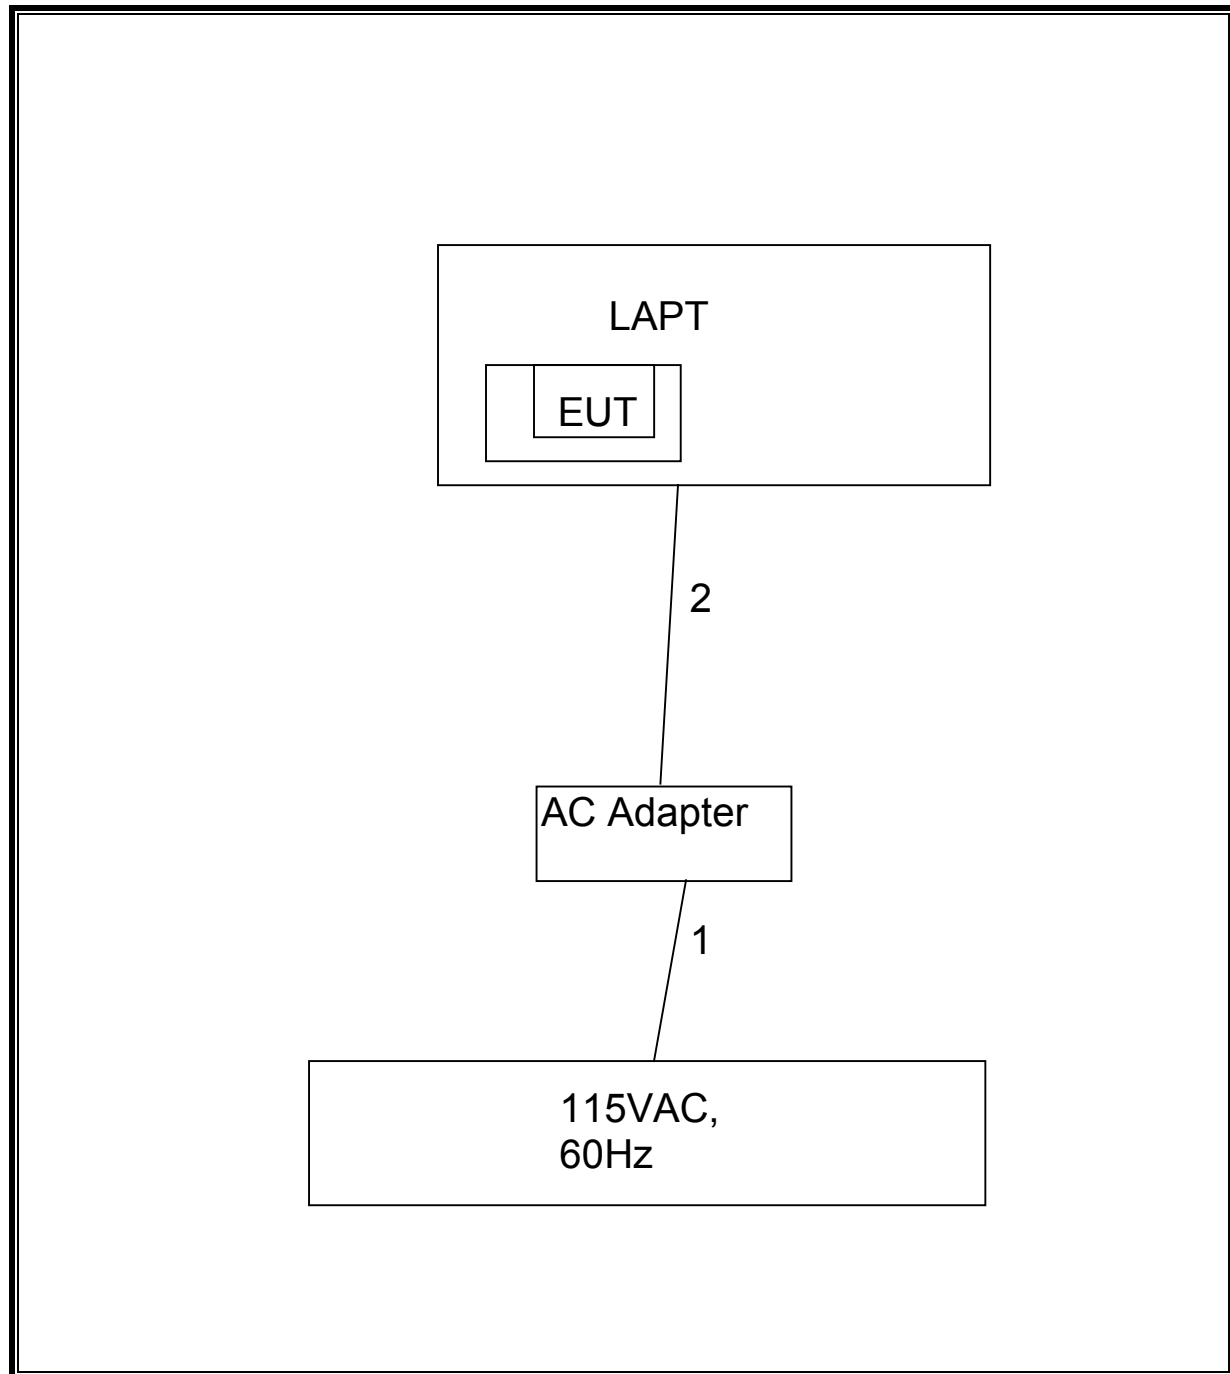

SETUP FOR DIGITAL DEVICE TESTS

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop PC	Apple	PowerBook	SW854600JUNO	DOC
AC Adapter	Delta	ADP90UBC	MV54207YSCN	N/A
Mouse	Apple	M5769	VJ5250Q5BNWDA	DOC
Keyboard	Apple	A1048	KY5230SCEQL3B	DOC
Combo Headphone/Microphone	Radio Shack	33-1187	N/A	N/A
iPod Mini	Apple	A1015	JQ4104QHPFW	DOC
iPod 20 GB	Apple	A1059	JQ436KK6PS9	DOC
Display Monitor	Apple	M6496	CY9374AZGZC	DOC


I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	AC	Unshielded	1.7	
2	DC	1	DC	Shielded	1.7	
3	USB	1	USB	Shielded	0.75	Mouse
4	USB	1	USB	Shielded	0.85	Keyboard
5	Audio	1	Audio Jack	Shielded	2.5	Headphone/Microphone
6	USB	1	USB	Shielded	1.1	iPod Mini
7	USB	1	USB	Shielded	1.1	iPod 20GB
8	Video	1	RGB	Shielded w/Ferrite	1.75	Display
9	AC	1	AC	Shielded	1.75	Display

TEST SETUP

The EUT is installed in a host laptop computer via its internal Mini PCIe slot during the tests. Test software exercised the radio card.

SETUP DIAGRAM FOR DIGITAL DEVICE TESTS

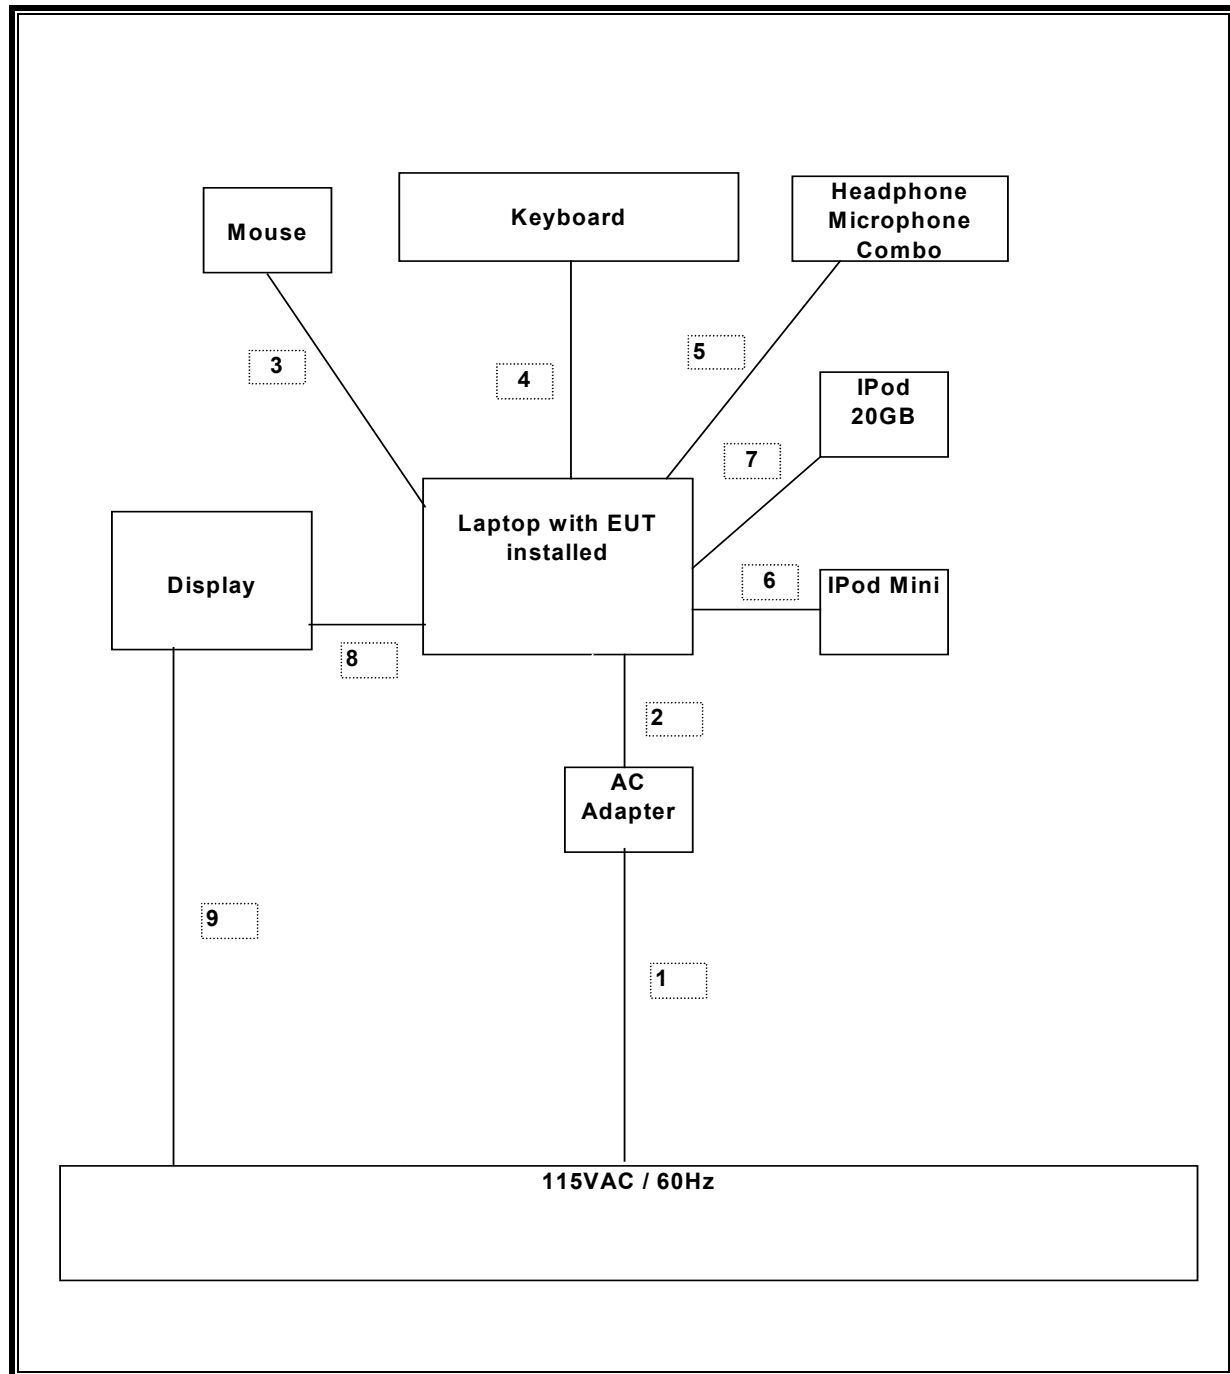

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
Spectrum Analyzer 3 Hz ~ 44 GHz	Agilent	E4446A	US42070220	1/1/2006
Antenna, Horn 1 ~ 18 GHz	EMCO	3115	6717	4/22/2006
Preamplifier 1-26.5 GHz	HP	8449B	3008A00931	6/24/2006
Preamplifier, 1 ~ 26.5 GHz	HP	8449B	3008A00369	8/17/2006
Spectrum Analyzer, 26.5 GHz	HP	8593EM	3710A00205	1/6/2006
Preamplifier	HP	8447D	1937A02062	1/7/2006
Antenna, Bilog 30MHz ~ 2Ghz	Sunol Sciences	JB1	A121003	3/3/2006

6.1.1. PEAK OUTPUT POWER 2400 – 2483.5 MHz BAND

PEAK POWER LIMIT

§15.247 (b) The maximum peak output power of the intentional radiator shall not exceed the following:

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz , and 5725-5850 MHz bands: 1 watt.

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz , and 5725-5850 MHz bands: 1 watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

§15.247 (b) (4) (i) Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer and the analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth.

RESULTS

The maximum antenna gain is 4.06 dBi for other than fixed, point-to-point operations, therefore the limit is 30 dBm.

No non-compliance noted:


802.11b Mode


Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	15.50	30	-14.50
Middle	2437	19.84	30	-10.16
High	2462	17.26	30	-12.74


802.11g Mode

Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	18.71	30	-11.29
Middle	2437	22.33	30	-7.67
High	2462	16.63	30	-13.37


OUTPUT POWER (802.11b MODE)

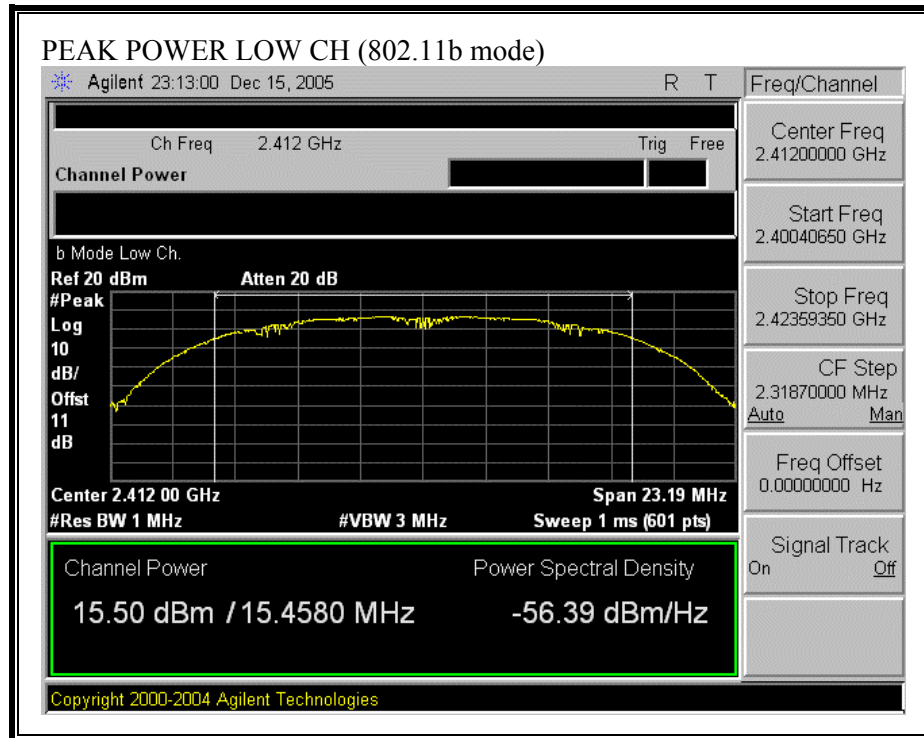


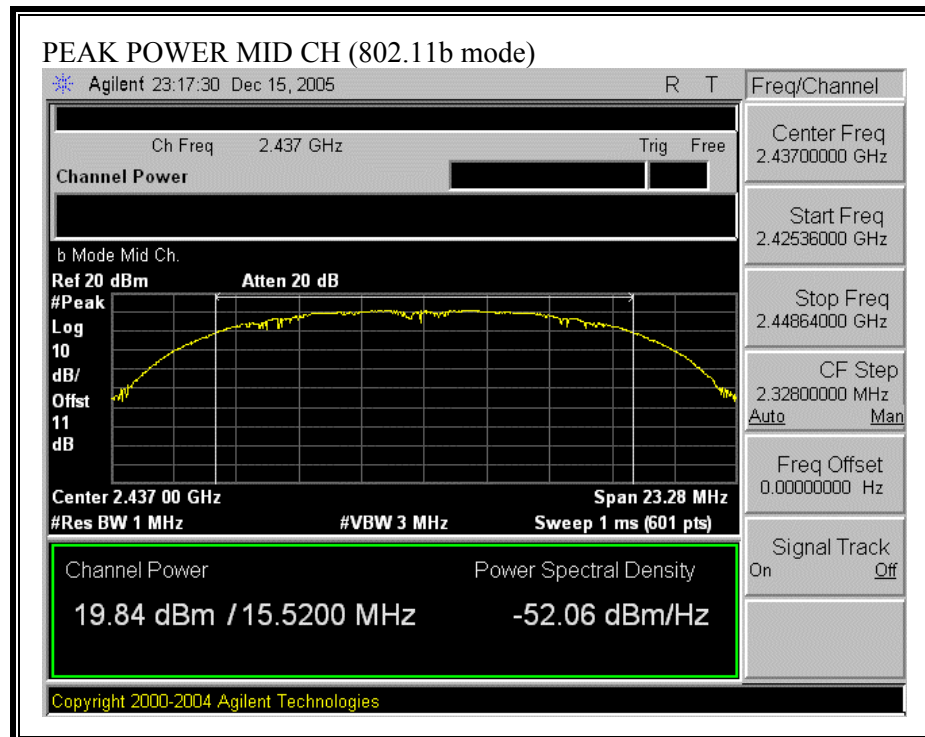


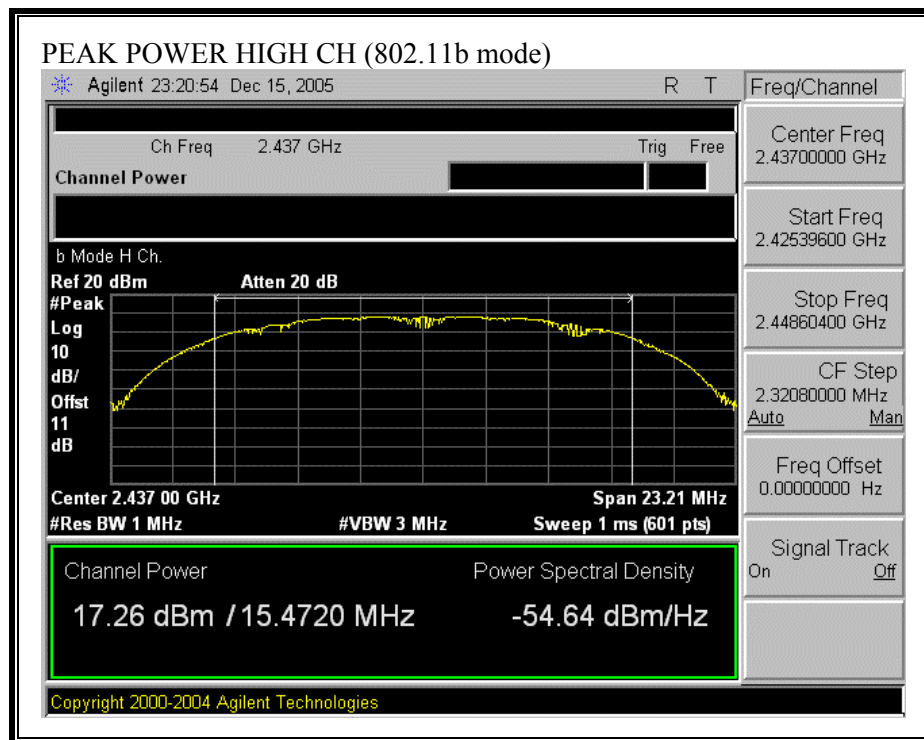

OUTPUT POWER (802.11g MODE)

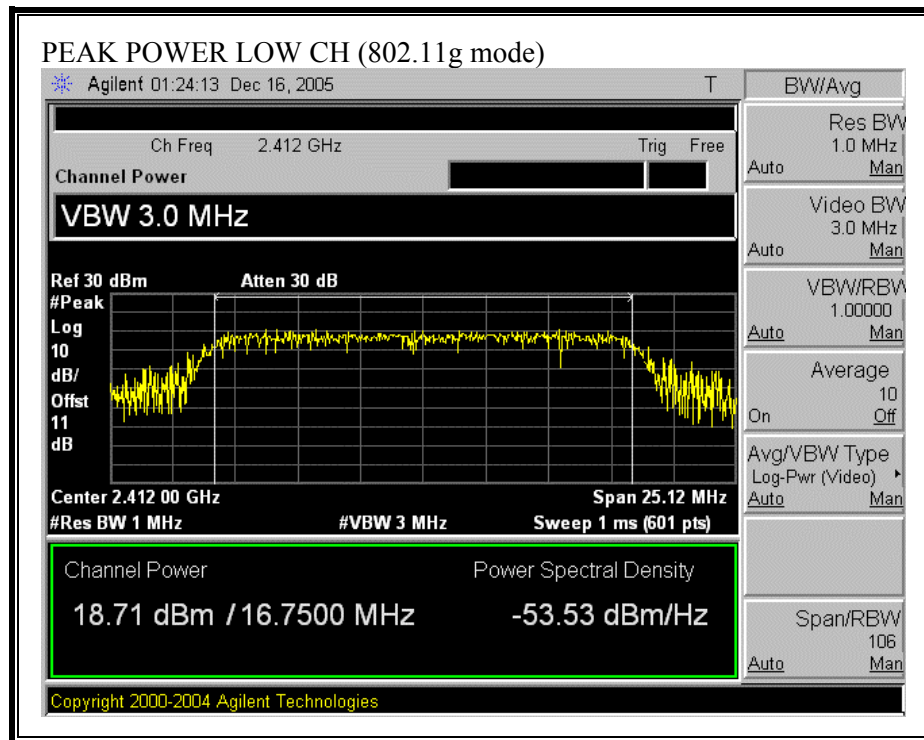

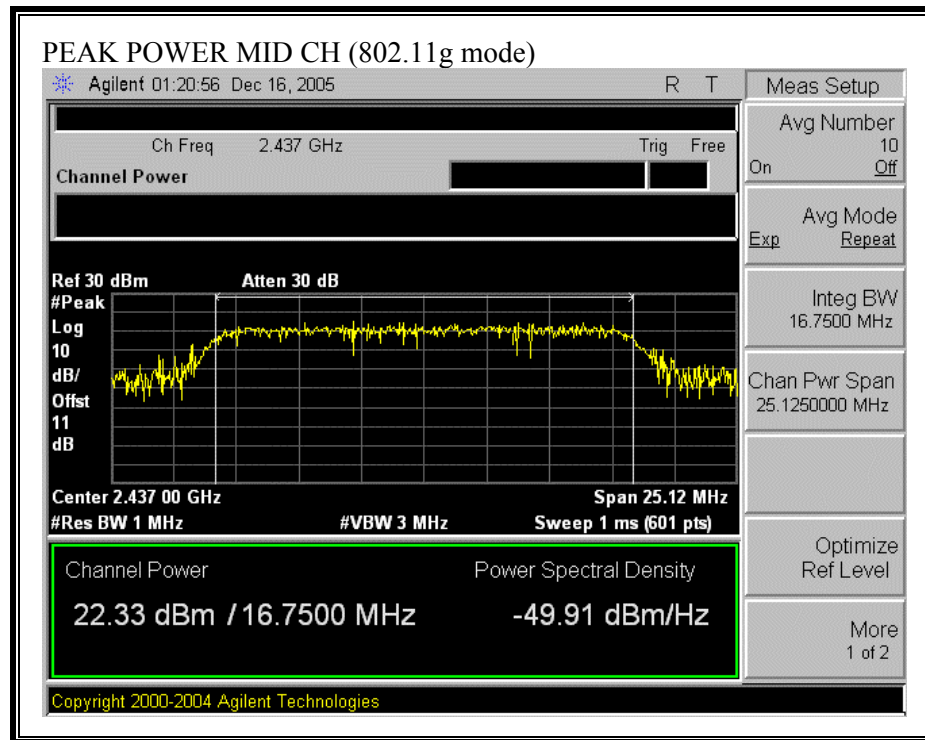

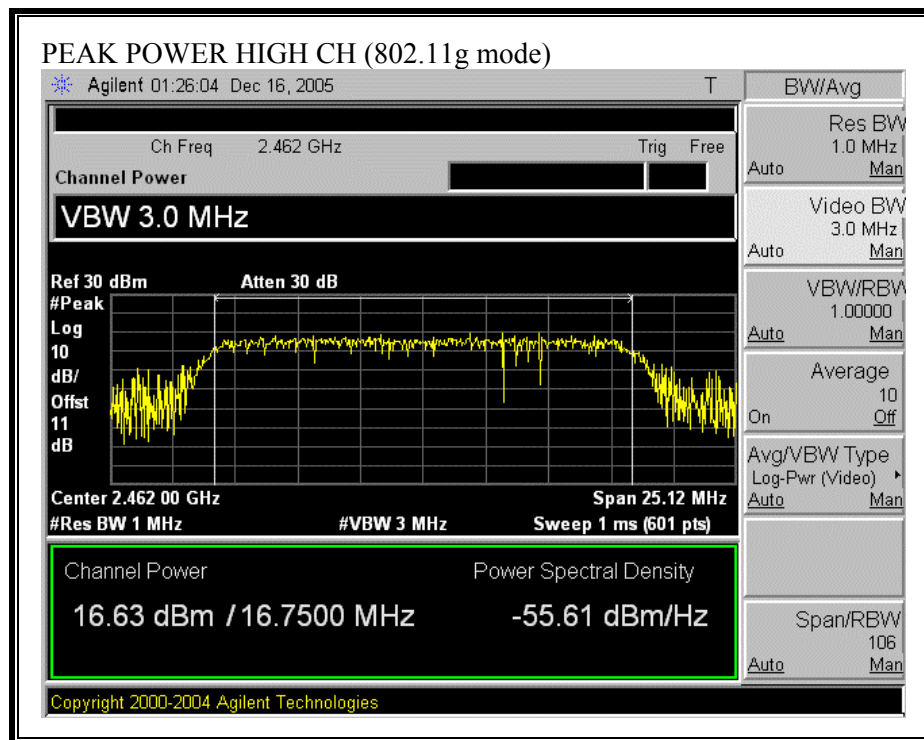

6.1.2. PEAK OUTPUT POWER 5725-5850 MHz BAND

PEAK POWER LIMIT

§15.247 (b) The maximum peak output power of the intentional radiator shall not exceed the following:

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz , and 5725-5850 MHz bands: 1 watt.

§15.247 (b) (4) Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

§15.247 (b) (4) (ii) Systems operating in the 5725–5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer and the analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth.

RESULTS


The maximum antenna gain is 4.06 dBi for other than fixed, point-to-point operations, therefore the limit is 30 dBm.


No non-compliance noted:


802.11a Mode

Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	5745	21.21	30	-8.79
Middle	5785	21.19	30	-8.81
High	5825	21.14	30	-8.86

OUTPUT POWER (802.11a MODE)

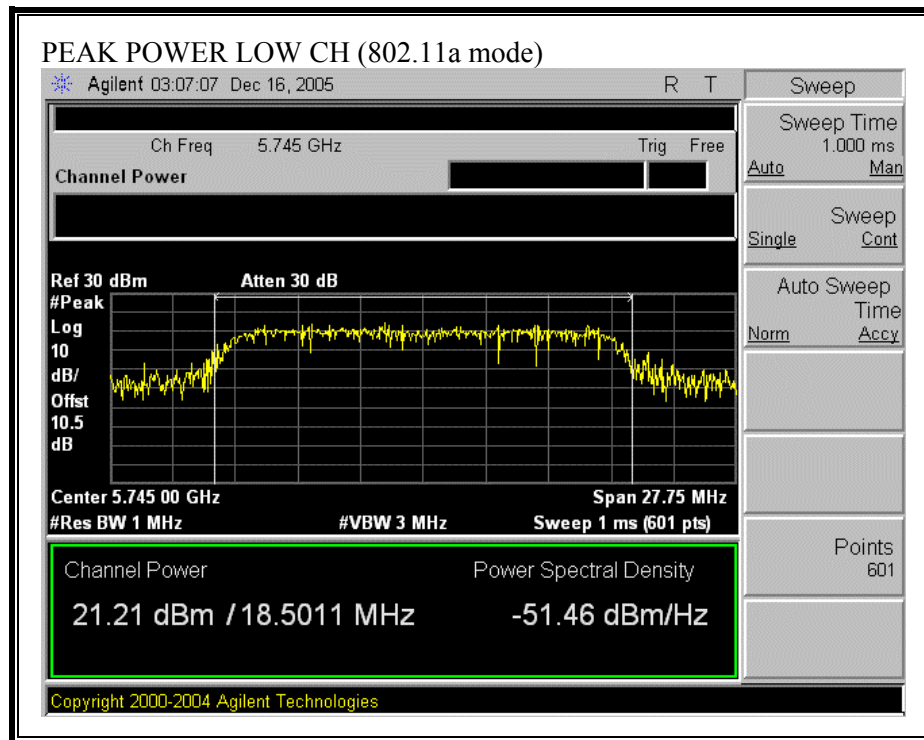

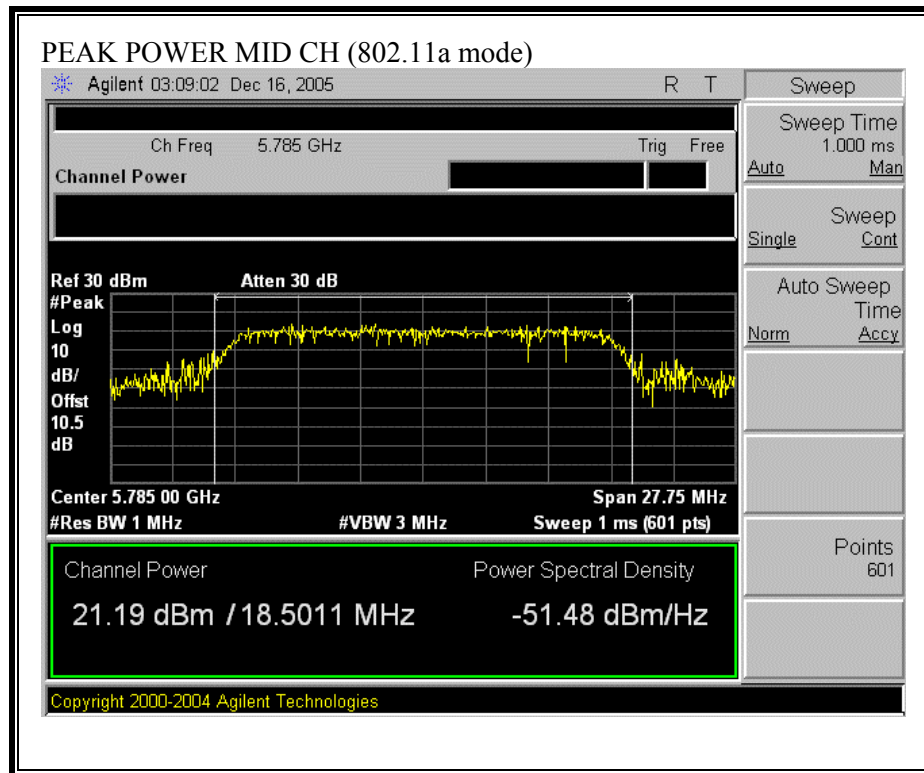

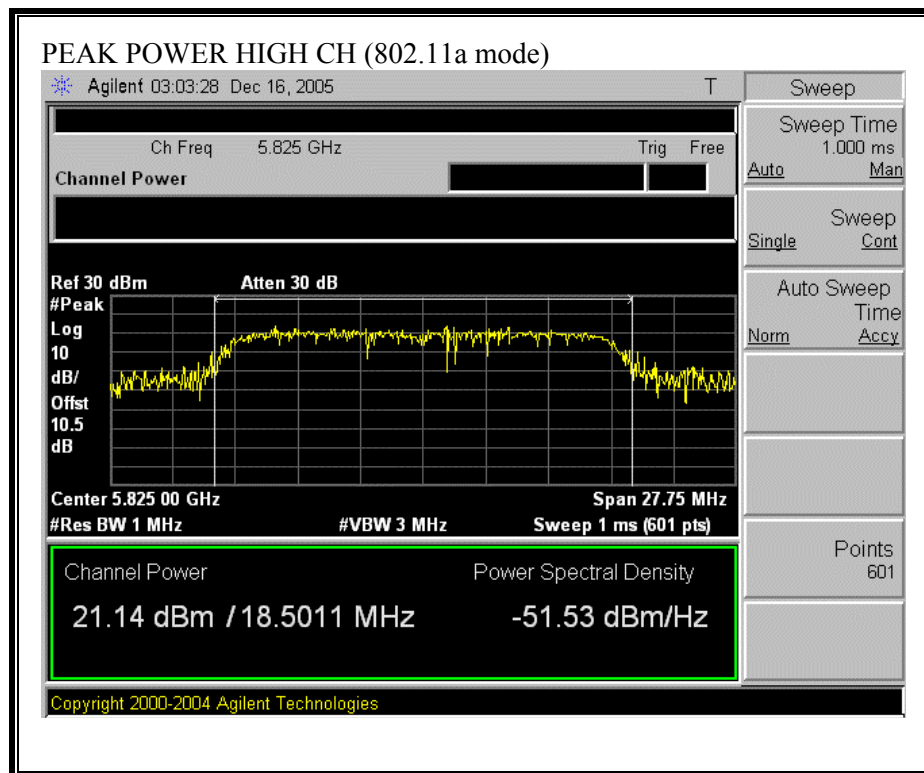

6.2. RADIATED EMISSIONS

6.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each 5 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


6.2.2. TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND


RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

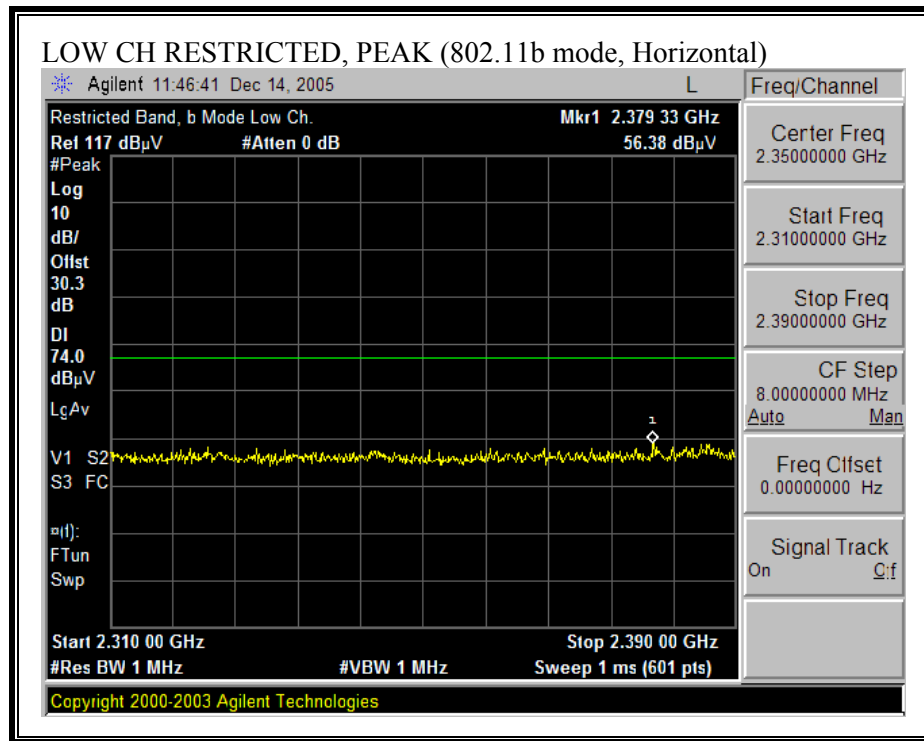

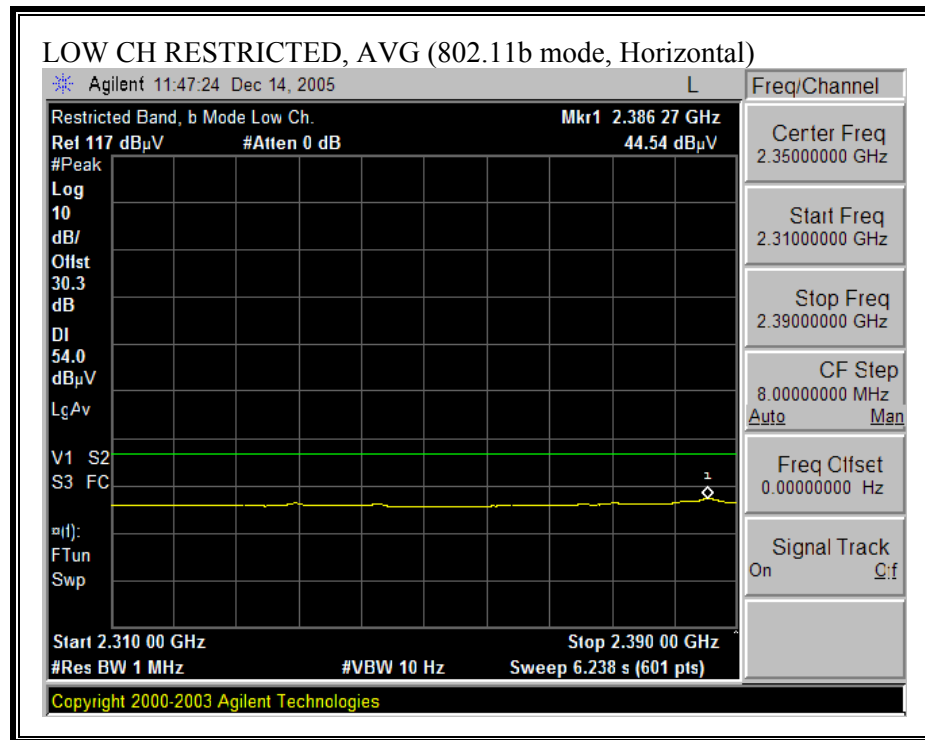



RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

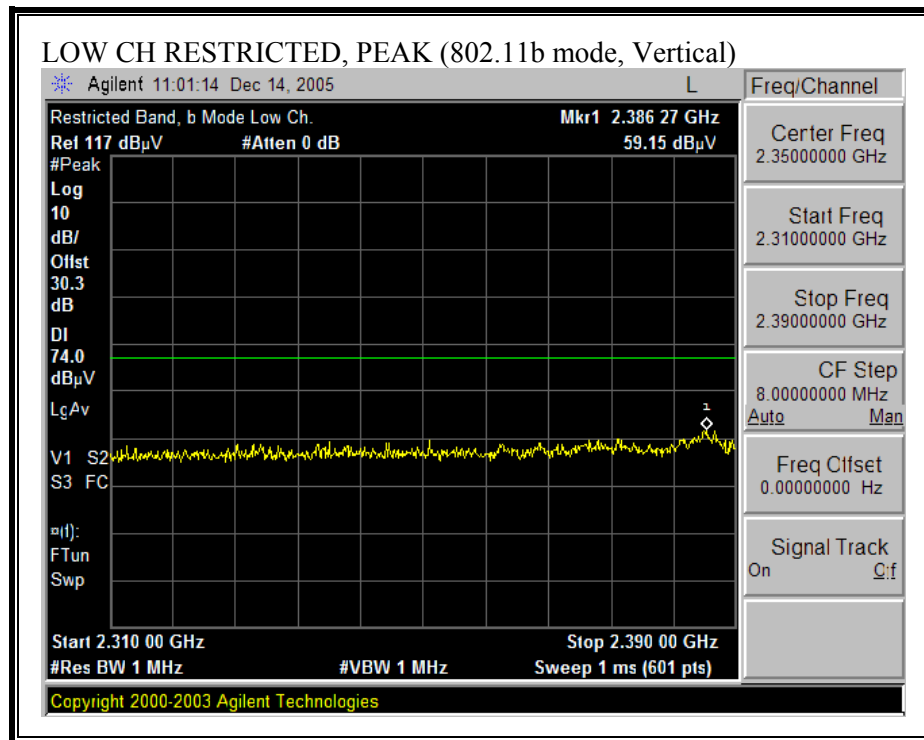

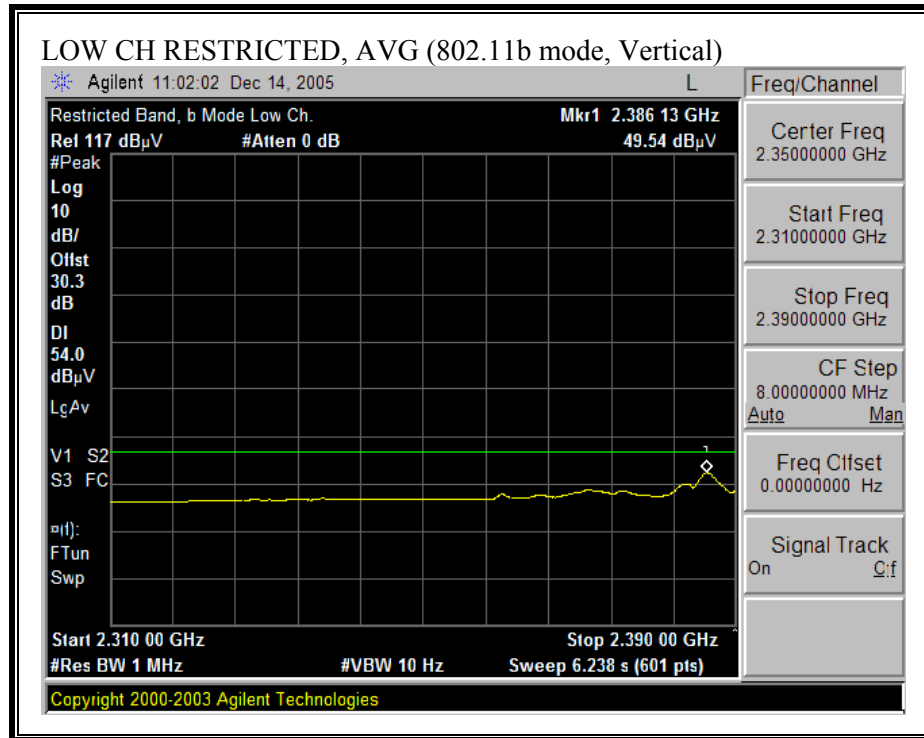



RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)

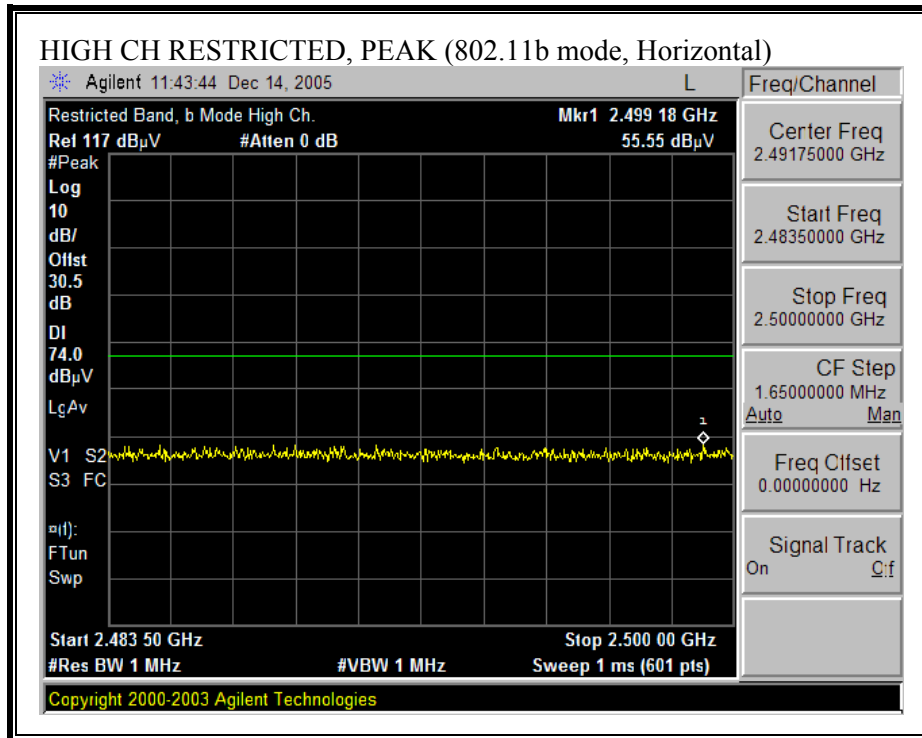

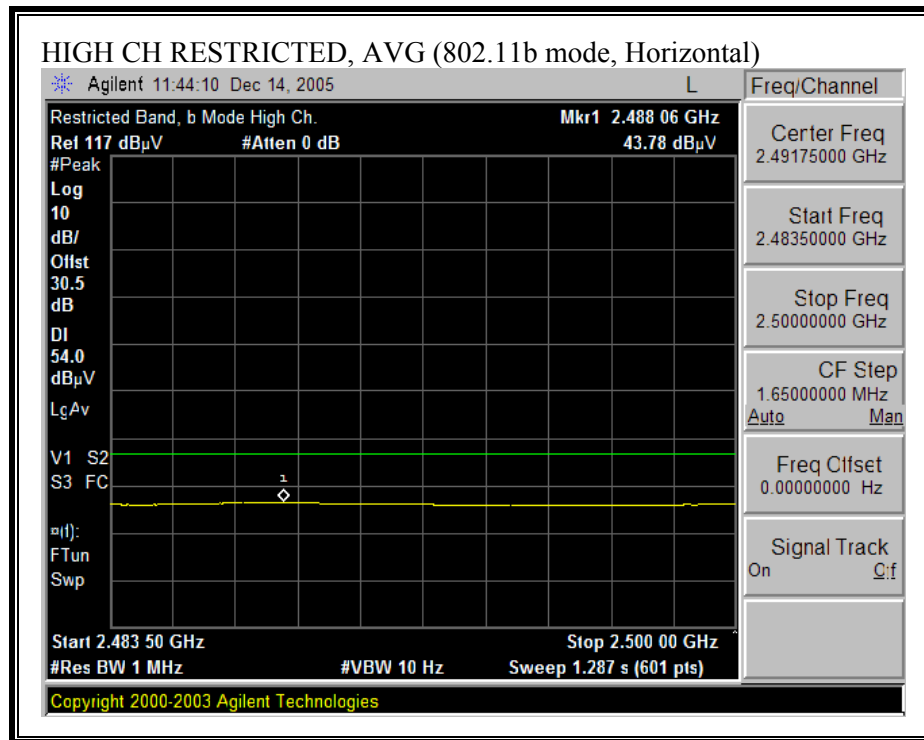

RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)

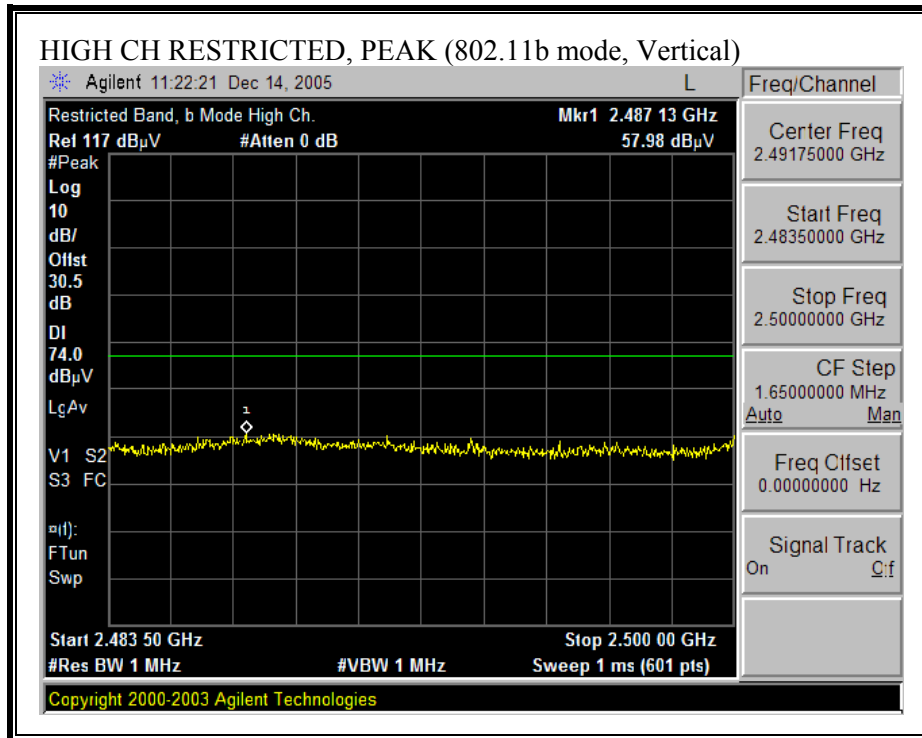


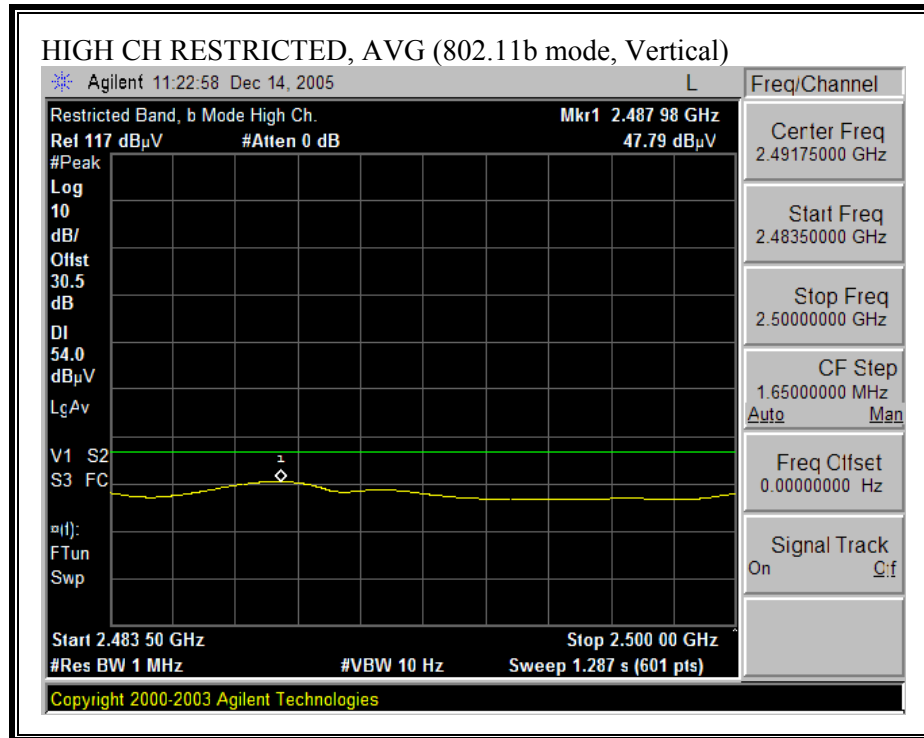


HARMONICS AND SPURIOUS EMISSIONS (b MODE)


12/14/05 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site Test Engr: Vien Tran Project #:05U3787 Company:Apple Computers Inc. EUT Descrip.:802.11 abg WLAN Mini Card in 1 Apple Laptop with 1 Antenna Type EUT M/N:AR5BXB6 Test Target:FCC 15.247 Mode Oper:Tx On_11b Mode Test Equipment: <table border="1"><tr><td>Horn 1-18GHz T73; S/N: 6717 @3m</td><td>Pre-amplifier 1-26GHz T145 Agilent 3008A005t</td><td>Pre-amplifier 26-40GHz</td><td>Horn > 18GHz</td></tr><tr><td colspan="4">Hi Frequency Cables <table border="1"><tr><td>2 foot cable</td><td>3 foot cable Vien 187215002</td><td>12 foot cable Vien 197209005</td><td>HPF HPF_4.0GHz</td><td>Reject Filter</td></tr></table></td></tr></table> <table border="1"><thead><tr><th>f GHz</th><th>Dist (m)</th><th>Read Pk dBuV</th><th>Read Avg. dBuV</th><th>AF dB/m</th><th>CL dB</th><th>Amp dB</th><th>D Corr dB</th><th>Filtr dB</th><th>Peak dBuV/m</th><th>Avg dBuV/m</th><th>Pk Lim dBuV/m</th><th>Avg Lim dBuV/m</th><th>Pk Mar dB</th><th>Avg Mar dB</th><th>Notes (V/H)</th></tr></thead><tbody><tr><td colspan="16">Low Ch. 16dBm</td></tr><tr><td>4.824</td><td>3.0</td><td>52.8</td><td>50.3</td><td>33.7</td><td>2.9</td><td>-34.8</td><td>0.0</td><td>0.6</td><td>55.2</td><td>52.7</td><td>74</td><td>54</td><td>-18.8</td><td>-1.3</td><td>V</td></tr><tr><td>4.824</td><td>3.0</td><td>48.3</td><td>42.9</td><td>33.7</td><td>2.9</td><td>-34.8</td><td>0.0</td><td>0.6</td><td>50.7</td><td>45.3</td><td>74</td><td>54</td><td>-23.3</td><td>-8.7</td><td>H</td></tr><tr><td colspan="16">Mid Ch. 17.5dBm</td></tr><tr><td>4.874</td><td>3.0</td><td>51.8</td><td>47.9</td><td>33.8</td><td>3.0</td><td>-34.9</td><td>0.0</td><td>0.6</td><td>54.3</td><td>50.4</td><td>74</td><td>54</td><td>-19.7</td><td>-3.6</td><td>V</td></tr><tr><td>7.311</td><td>3.0</td><td>52.5</td><td>46.8</td><td>35.5</td><td>4.2</td><td>-34.7</td><td>0.0</td><td>0.6</td><td>58.2</td><td>52.5</td><td>74</td><td>54</td><td>-15.8</td><td>-1.5</td><td>V</td></tr><tr><td>4.874</td><td>3.0</td><td>47.5</td><td>38.2</td><td>33.8</td><td>3.0</td><td>-34.9</td><td>0.0</td><td>0.6</td><td>50.0</td><td>40.7</td><td>74</td><td>54</td><td>-24.0</td><td>-13.3</td><td>H</td></tr><tr><td>7.311</td><td>3.0</td><td>44.0</td><td>31.7</td><td>35.5</td><td>4.2</td><td>-34.7</td><td>0.0</td><td>0.6</td><td>49.7</td><td>37.4</td><td>74</td><td>54</td><td>-24.3</td><td>-16.6</td><td>H</td></tr><tr><td colspan="16">High Ch. 16dBm</td></tr><tr><td>4.924</td><td>3.0</td><td>47.8</td><td>41.1</td><td>33.8</td><td>3.1</td><td>-34.9</td><td>0.0</td><td>0.6</td><td>50.5</td><td>43.7</td><td>74</td><td>54</td><td>-23.5</td><td>-10.3</td><td>V</td></tr><tr><td>7.386</td><td>3.0</td><td>48.0</td><td>41.8</td><td>35.6</td><td>4.2</td><td>-34.6</td><td>0.0</td><td>0.6</td><td>53.8</td><td>47.6</td><td>74</td><td>54</td><td>-20.2</td><td>-6.4</td><td>V</td></tr><tr><td>4.924</td><td>3.0</td><td>44.0</td><td>33.0</td><td>33.8</td><td>3.1</td><td>-34.9</td><td>0.0</td><td>0.6</td><td>46.7</td><td>35.6</td><td>74</td><td>54</td><td>-27.3</td><td>-18.4</td><td>H</td></tr><tr><td>7.386</td><td>3.0</td><td>44.4</td><td>32.4</td><td>35.6</td><td>4.2</td><td>-34.6</td><td>0.0</td><td>0.6</td><td>50.2</td><td>38.2</td><td>74</td><td>54</td><td>-23.8</td><td>-15.8</td><td>H</td></tr></tbody></table> <table border="1"><tr><td>f</td><td>Measurement Frequency</td><td>Amp</td><td>Preamp Gain</td><td>Avg Lim</td><td>Average Field Strength Limit</td></tr><tr><td>Dist</td><td>Distance to Antenna</td><td>D Corr</td><td>Distance Correct to 3 meters</td><td>Pk Lim</td><td>Peak Field Strength Limit</td></tr><tr><td>Read</td><td>Analyzer Reading</td><td>Avg</td><td>Average Field Strength @ 3 m</td><td>Avg Mar</td><td>Margin vs. Average Limit</td></tr><tr><td>AF</td><td>Antenna Factor</td><td>Peak</td><td>Calculated Peak Field Strength</td><td>Pk Mar</td><td>Margin vs. Peak Limit</td></tr><tr><td>CL</td><td>Cable Loss</td><td>HPF</td><td>High Pass Filter</td><td></td><td></td></tr></table>																Horn 1-18GHz T73; S/N: 6717 @3m	Pre-amplifier 1-26GHz T145 Agilent 3008A005t	Pre-amplifier 26-40GHz	Horn > 18GHz	Hi Frequency Cables <table border="1"><tr><td>2 foot cable</td><td>3 foot cable Vien 187215002</td><td>12 foot cable Vien 197209005</td><td>HPF HPF_4.0GHz</td><td>Reject Filter</td></tr></table>				2 foot cable	3 foot cable Vien 187215002	12 foot cable Vien 197209005	HPF HPF_4.0GHz	Reject Filter	f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	Low Ch. 16dBm																4.824	3.0	52.8	50.3	33.7	2.9	-34.8	0.0	0.6	55.2	52.7	74	54	-18.8	-1.3	V	4.824	3.0	48.3	42.9	33.7	2.9	-34.8	0.0	0.6	50.7	45.3	74	54	-23.3	-8.7	H	Mid Ch. 17.5dBm																4.874	3.0	51.8	47.9	33.8	3.0	-34.9	0.0	0.6	54.3	50.4	74	54	-19.7	-3.6	V	7.311	3.0	52.5	46.8	35.5	4.2	-34.7	0.0	0.6	58.2	52.5	74	54	-15.8	-1.5	V	4.874	3.0	47.5	38.2	33.8	3.0	-34.9	0.0	0.6	50.0	40.7	74	54	-24.0	-13.3	H	7.311	3.0	44.0	31.7	35.5	4.2	-34.7	0.0	0.6	49.7	37.4	74	54	-24.3	-16.6	H	High Ch. 16dBm																4.924	3.0	47.8	41.1	33.8	3.1	-34.9	0.0	0.6	50.5	43.7	74	54	-23.5	-10.3	V	7.386	3.0	48.0	41.8	35.6	4.2	-34.6	0.0	0.6	53.8	47.6	74	54	-20.2	-6.4	V	4.924	3.0	44.0	33.0	33.8	3.1	-34.9	0.0	0.6	46.7	35.6	74	54	-27.3	-18.4	H	7.386	3.0	44.4	32.4	35.6	4.2	-34.6	0.0	0.6	50.2	38.2	74	54	-23.8	-15.8	H	f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit	Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit	Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit	AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit	CL	Cable Loss	HPF	High Pass Filter		
Horn 1-18GHz T73; S/N: 6717 @3m	Pre-amplifier 1-26GHz T145 Agilent 3008A005t	Pre-amplifier 26-40GHz	Horn > 18GHz																																																																																																																																																																																																																																																																																							
Hi Frequency Cables <table border="1"><tr><td>2 foot cable</td><td>3 foot cable Vien 187215002</td><td>12 foot cable Vien 197209005</td><td>HPF HPF_4.0GHz</td><td>Reject Filter</td></tr></table>				2 foot cable	3 foot cable Vien 187215002	12 foot cable Vien 197209005	HPF HPF_4.0GHz	Reject Filter																																																																																																																																																																																																																																																																																		
2 foot cable	3 foot cable Vien 187215002	12 foot cable Vien 197209005	HPF HPF_4.0GHz	Reject Filter																																																																																																																																																																																																																																																																																						
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)																																																																																																																																																																																																																																																																											
Low Ch. 16dBm																																																																																																																																																																																																																																																																																										
4.824	3.0	52.8	50.3	33.7	2.9	-34.8	0.0	0.6	55.2	52.7	74	54	-18.8	-1.3	V																																																																																																																																																																																																																																																																											
4.824	3.0	48.3	42.9	33.7	2.9	-34.8	0.0	0.6	50.7	45.3	74	54	-23.3	-8.7	H																																																																																																																																																																																																																																																																											
Mid Ch. 17.5dBm																																																																																																																																																																																																																																																																																										
4.874	3.0	51.8	47.9	33.8	3.0	-34.9	0.0	0.6	54.3	50.4	74	54	-19.7	-3.6	V																																																																																																																																																																																																																																																																											
7.311	3.0	52.5	46.8	35.5	4.2	-34.7	0.0	0.6	58.2	52.5	74	54	-15.8	-1.5	V																																																																																																																																																																																																																																																																											
4.874	3.0	47.5	38.2	33.8	3.0	-34.9	0.0	0.6	50.0	40.7	74	54	-24.0	-13.3	H																																																																																																																																																																																																																																																																											
7.311	3.0	44.0	31.7	35.5	4.2	-34.7	0.0	0.6	49.7	37.4	74	54	-24.3	-16.6	H																																																																																																																																																																																																																																																																											
High Ch. 16dBm																																																																																																																																																																																																																																																																																										
4.924	3.0	47.8	41.1	33.8	3.1	-34.9	0.0	0.6	50.5	43.7	74	54	-23.5	-10.3	V																																																																																																																																																																																																																																																																											
7.386	3.0	48.0	41.8	35.6	4.2	-34.6	0.0	0.6	53.8	47.6	74	54	-20.2	-6.4	V																																																																																																																																																																																																																																																																											
4.924	3.0	44.0	33.0	33.8	3.1	-34.9	0.0	0.6	46.7	35.6	74	54	-27.3	-18.4	H																																																																																																																																																																																																																																																																											
7.386	3.0	44.4	32.4	35.6	4.2	-34.6	0.0	0.6	50.2	38.2	74	54	-23.8	-15.8	H																																																																																																																																																																																																																																																																											
f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit																																																																																																																																																																																																																																																																																					
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit																																																																																																																																																																																																																																																																																					
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit																																																																																																																																																																																																																																																																																					
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit																																																																																																																																																																																																																																																																																					
CL	Cable Loss	HPF	High Pass Filter																																																																																																																																																																																																																																																																																							


RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)

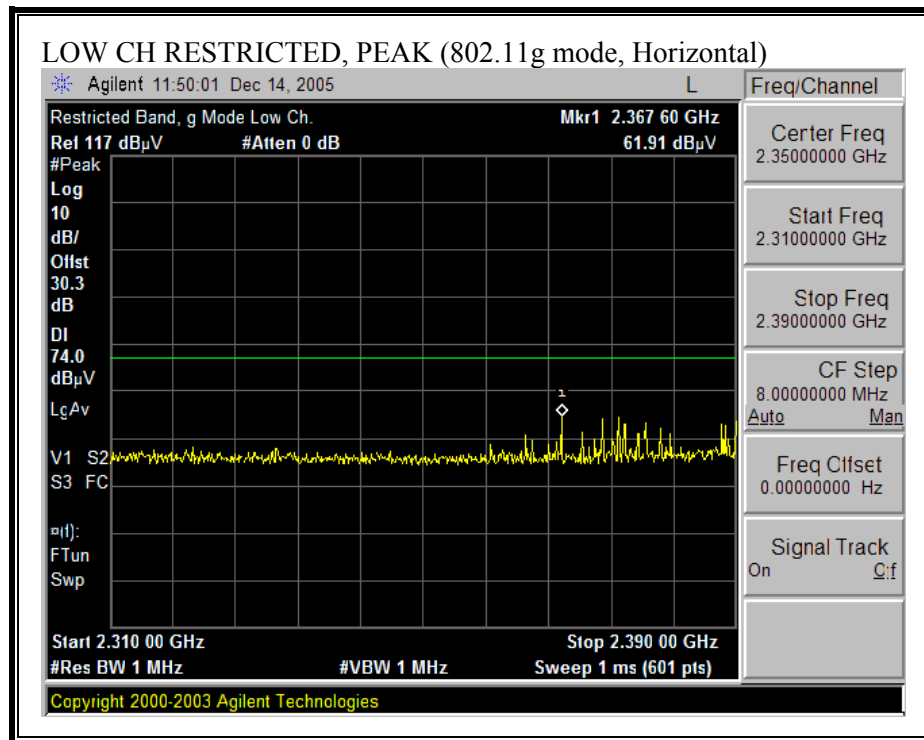

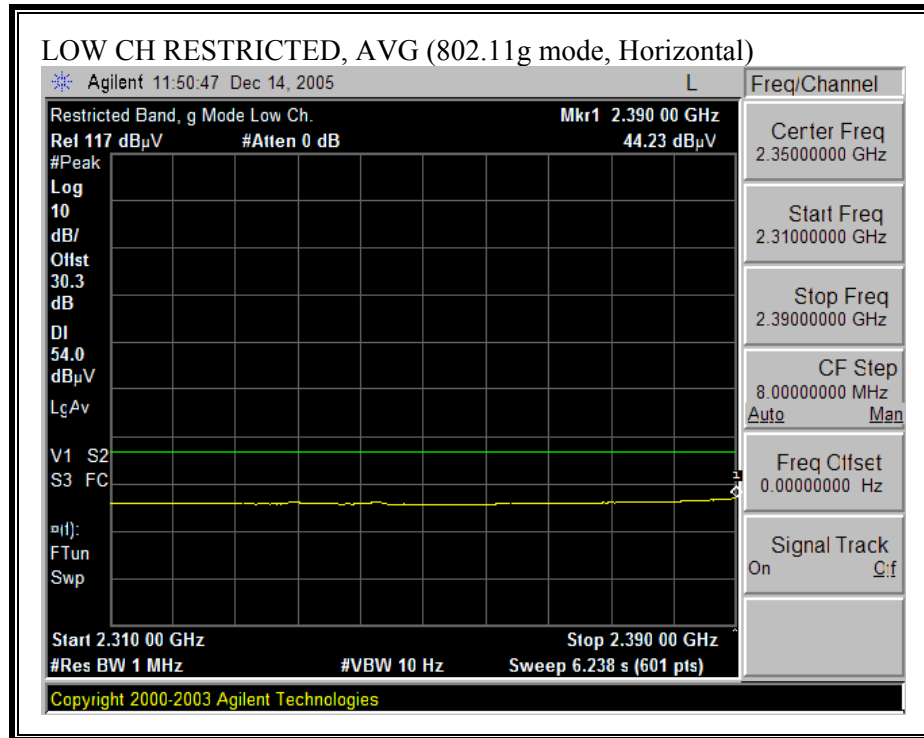



RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, VERTICAL)

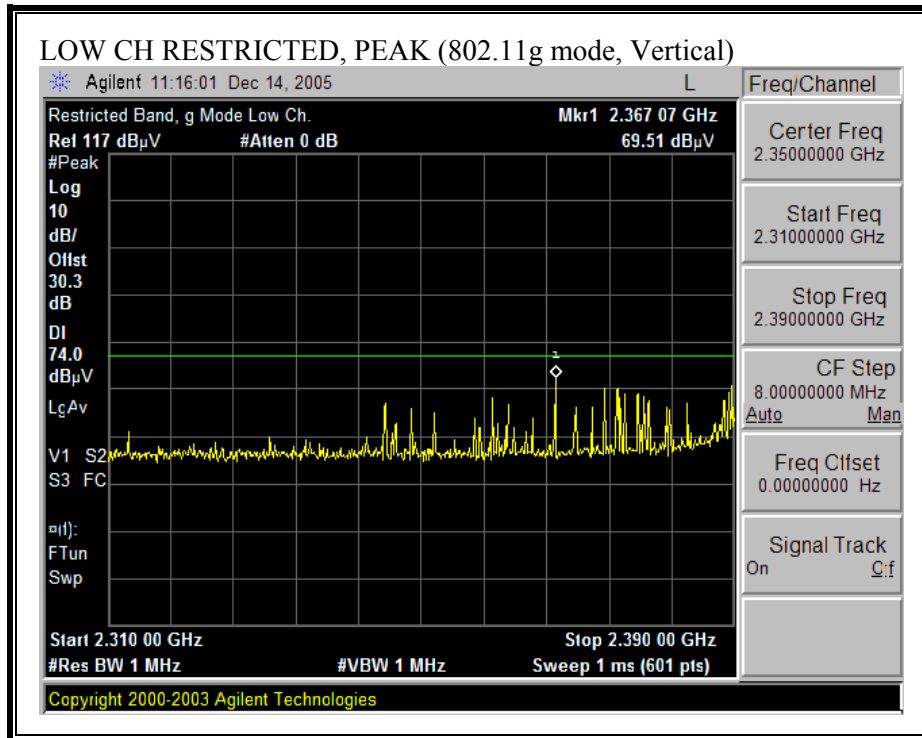

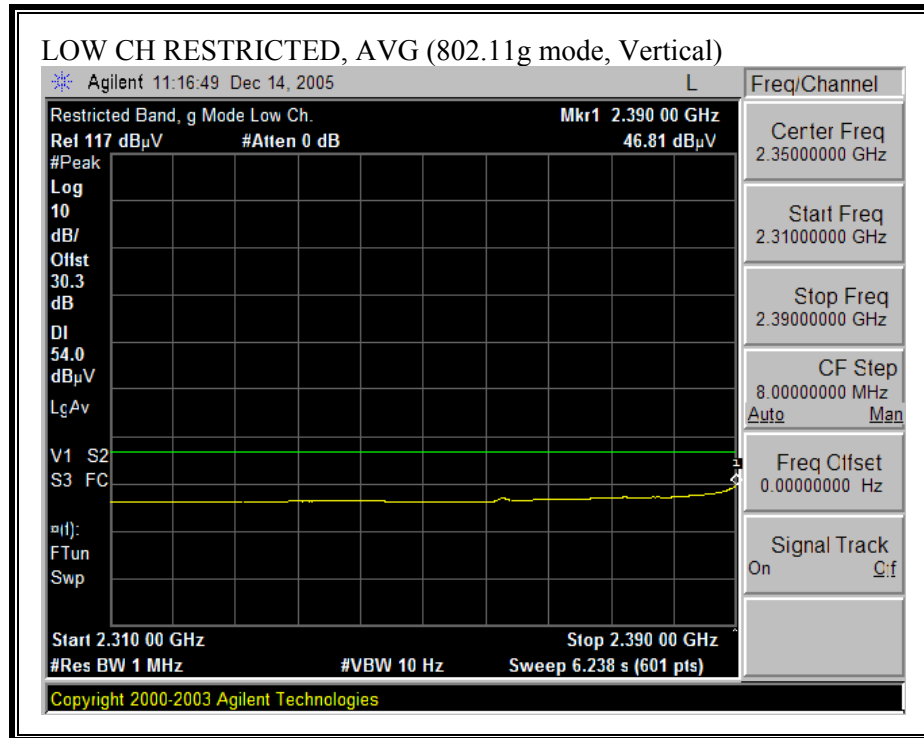



RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)

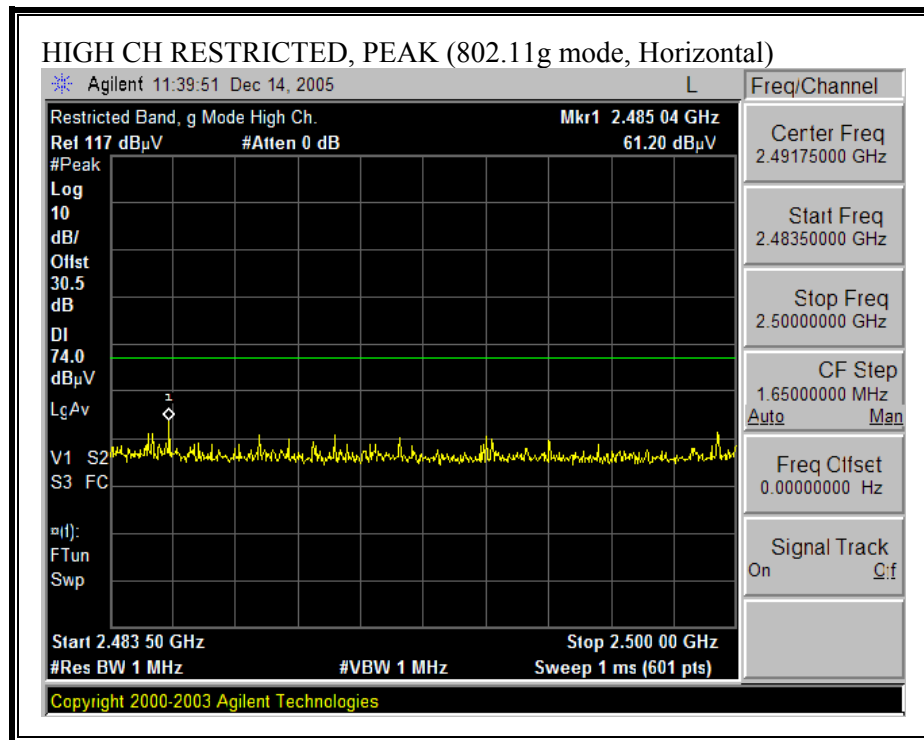

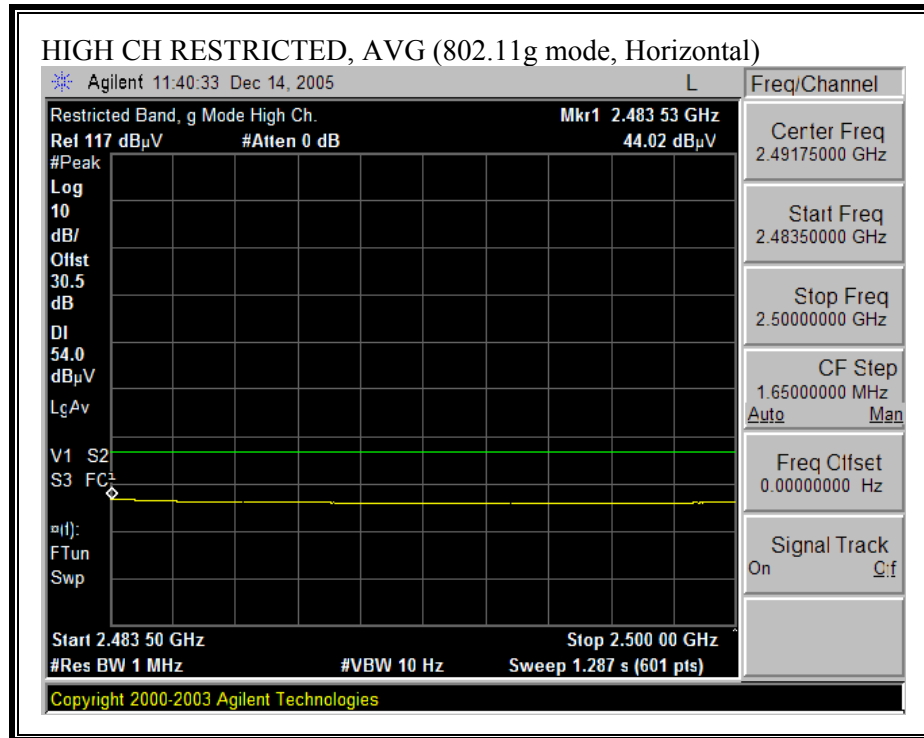

RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)

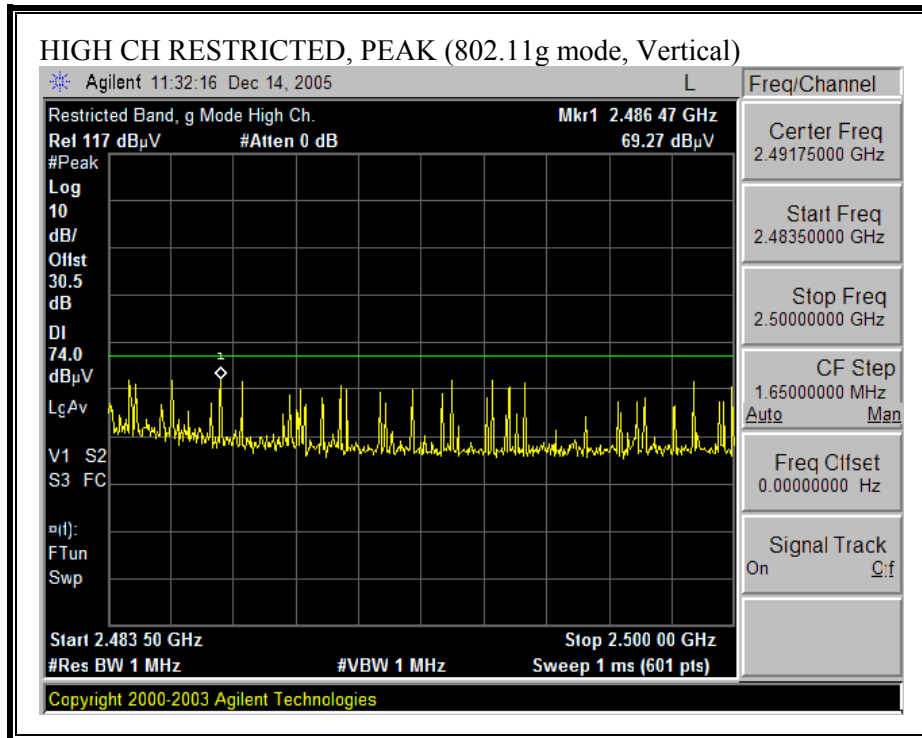

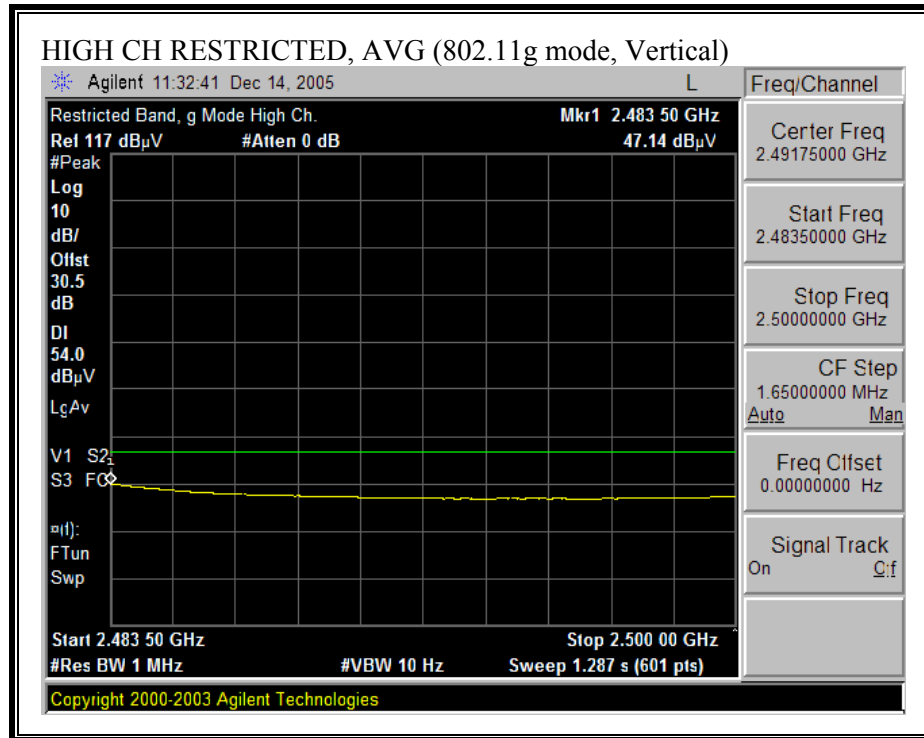

HARMONICS AND SPURIOUS EMISSIONS (g MODE)

12/14/05 High Frequency Measurement

Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: Vien Tran

Project #:05U3787

Company: Apple Computers Inc.

EUT Descrip.:802.11 abg WLAN Mini Card in 1 Apple Laptop with 1 Antenna Type

EUT M/N:AR5BXB6

Test Target:FCC 15.247

Mode Oper:Tx On_11g Mode

Test Equipment:

Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz	Limit
T73; S/N: 6717 @3m	T145 Agilent 3008A005t			FCC 15.205
Hi Frequency Cables				
2 foot cable	3 foot cable	12 foot cable	HPF	Reject Filter
	Vien 187215002	Vien 197209005	HPF_4.0GHz	
Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz; VBW=10Hz				

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low Ch. 13.3dBm															
4.824	3.0	43.6	32.0	33.7	2.9	-34.8	0.0	0.6	46.0	34.4	74	54	-28.0	-19.6	V
4.824	3.0	42.7	31.8	33.7	2.9	-34.8	0.0	0.6	45.1	34.2	74	54	-28.9	-19.8	H
Mid Ch. 17.5dBm															
4.874	3.0	52.4	40.6	33.8	3.0	-34.9	0.0	0.6	54.9	43.1	74	54	-19.1	-10.9	V
7.311	3.0	53.5	41.1	35.5	4.2	-34.7	0.0	0.6	59.2	46.8	74	54	-14.8	-7.2	V
4.874	3.0	46.0	33.8	33.8	3.0	-34.9	0.0	0.6	48.5	36.3	74	54	-25.5	-17.7	H
7.311	3.0	46.9	34.1	35.5	4.2	-34.7	0.0	0.6	52.6	39.8	74	54	-21.4	-14.2	H
High Ch. 13.6dBm															
4.924	3.0	44.3	31.7	33.8	3.1	-34.9	0.0	0.6	47.0	34.4	74	54	-27.0	-19.6	V
7.386	3.0	45.0	32.1	35.6	4.2	-34.6	0.0	0.6	50.8	37.9	74	54	-23.2	-16.1	V
4.924	3.0	43.7	31.8	33.8	3.1	-34.9	0.0	0.6	46.4	34.5	74	54	-27.6	-19.5	H
7.386	3.0	43.9	32.0	35.6	4.2	-34.6	0.0	0.6	49.7	37.8	74	54	-24.3	-16.2	H

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		


6.2.3. TRANSMITTER ABOVE 1 GHz FOR 5725 TO 5850 MHz BAND

HARMONICS AND SPURIOUS EMISSIONS (802.11a MODE)

12/14/05 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site																
Test Engr: Vien Tran Project #:05U3787 Company:Apple Computers Inc. EUT Descrip.:802.11 abg WLAN Mini Card in 1 Apple Laptop with 1 Antenna Type EUT M/N:AR5BXB6 Test Target:FCC 15.247 Mode Oper:TX, 5.8GHz																
Test Equipment:																
Horn 1-18GHz T73; S/N: 6717 @3m		Pre-amplifier 1-26GHz T145 Agilent 3008A005		Pre-amplifier 26-40GHz		Horn > 18GHz T39-T88 ARA 18-40GHz & Mixer > 40GHz		Limit FCC 15.205								
Hi Frequency Cables																
2 foot cable		3 foot cable Vien 187215002		12 foot cable Vien 197209005		HPF HPF_7.6GHz		Reject Filter R_001		Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz, VBW=10Hz						
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fldr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	
Low Ch, 5745MHz Average=17.4dBm																
11.490	3.0	49.7	37.5	38.3	4.8	-33.1	0.0	0.7	60.4	48.2	74	54	-13.6	-5.8	V	
11.490	3.0	44.9	32.4	38.3	4.8	-33.1	0.0	0.7	55.6	43.1	74	54	-18.4	-10.9	H	
Mid Ch, 5785MHz Average=17.3dBm																
11.570	3.0	47.3	35.9	38.3	4.8	-33.0	0.0	0.7	58.1	46.7	74	54	-15.9	-7.3	V	
11.570	3.0	43.6	31.8	38.3	4.8	-33.0	0.0	0.7	54.4	42.6	74	54	-19.6	-11.4	H	
High Ch, 5825MHz Average=17.4dBm																
11.650	3.0	48.3	36.5	38.4	4.8	-32.9	0.0	0.7	59.3	47.5	74	54	-14.7	-6.5	V	
11.650	3.0	44.8	32.3	38.4	4.8	-32.9	0.0	0.7	55.8	43.3	74	54	-18.2	-10.7	H	
Note: No other emissions were detected above the system noise floor.																
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit			
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit			
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit			
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit			
CL	Cable Loss					HPF	High Pass Filter									

6.2.4. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz


SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL B&G mode)

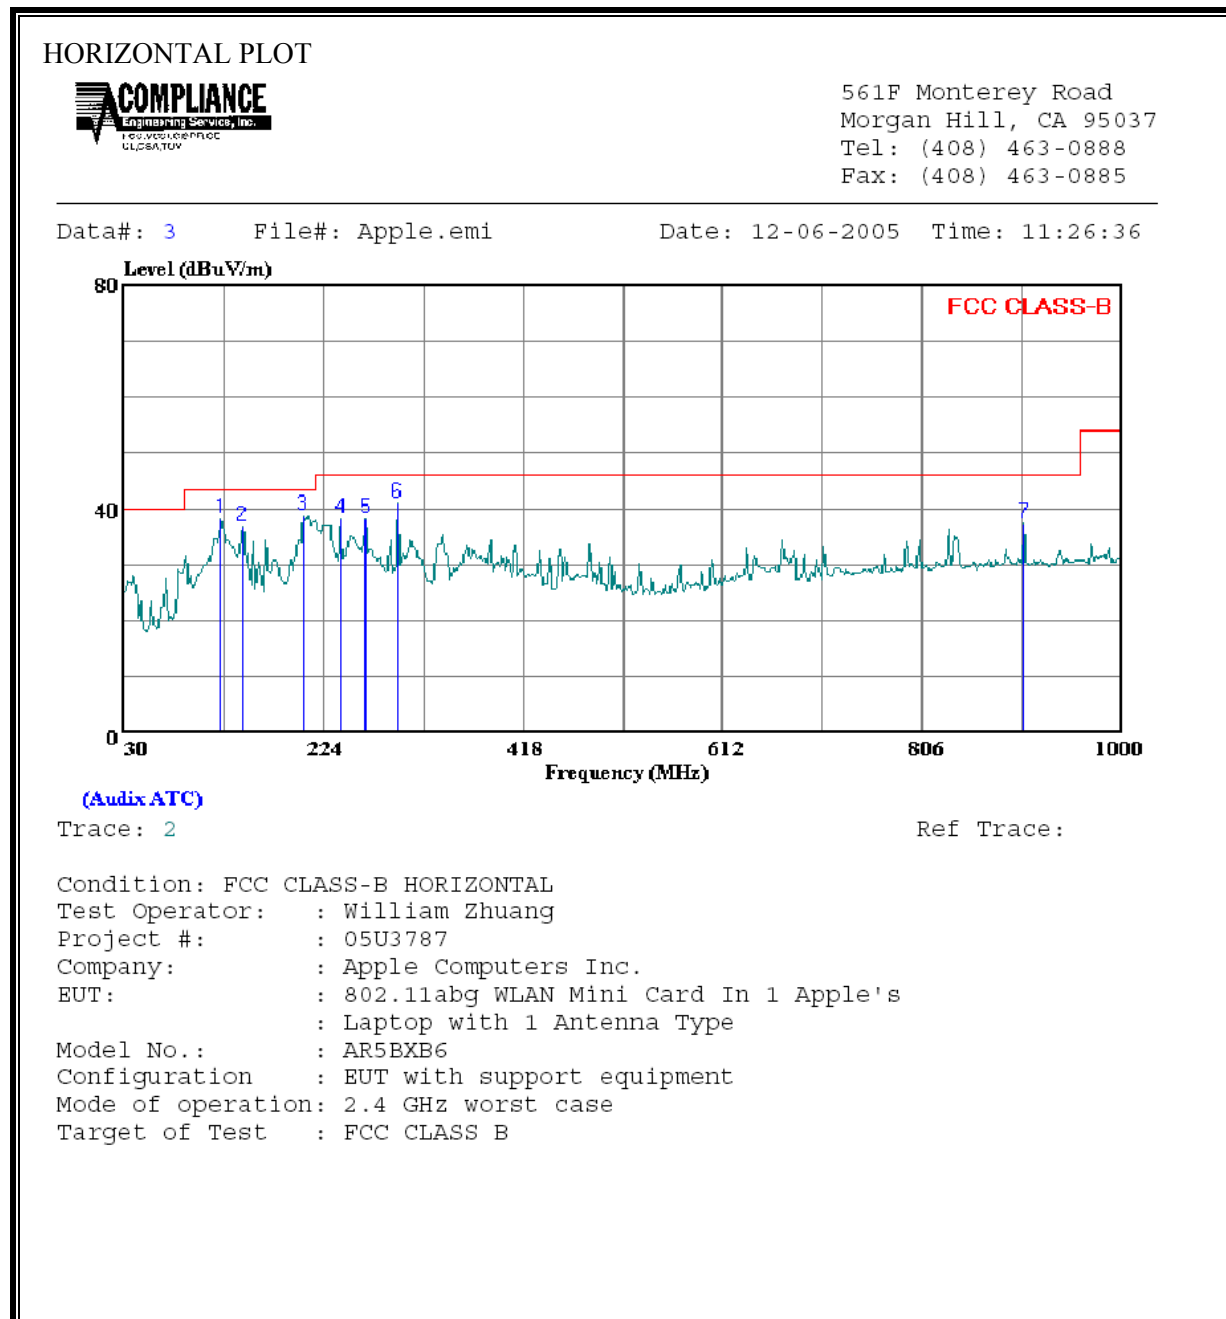

HORIZONTAL DATA

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	124.090	50.72	-12.59	38.13	43.50	-5.37	Peak
2	145.430	50.19	-13.23	36.97	43.50	-6.54	Peak
3	203.630	52.45	-13.63	38.82	43.50	-4.68	Peak
4	240.490	52.26	-14.06	38.20	46.00	-7.80	Peak
5	264.740	51.34	-13.21	38.14	46.00	-7.86	Peak
6	295.780	53.08	-12.05	41.03	46.00	-4.97	Peak
7	904.940	38.20	-0.95	37.25	46.00	-8.75	Peak


SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL B&G mode)

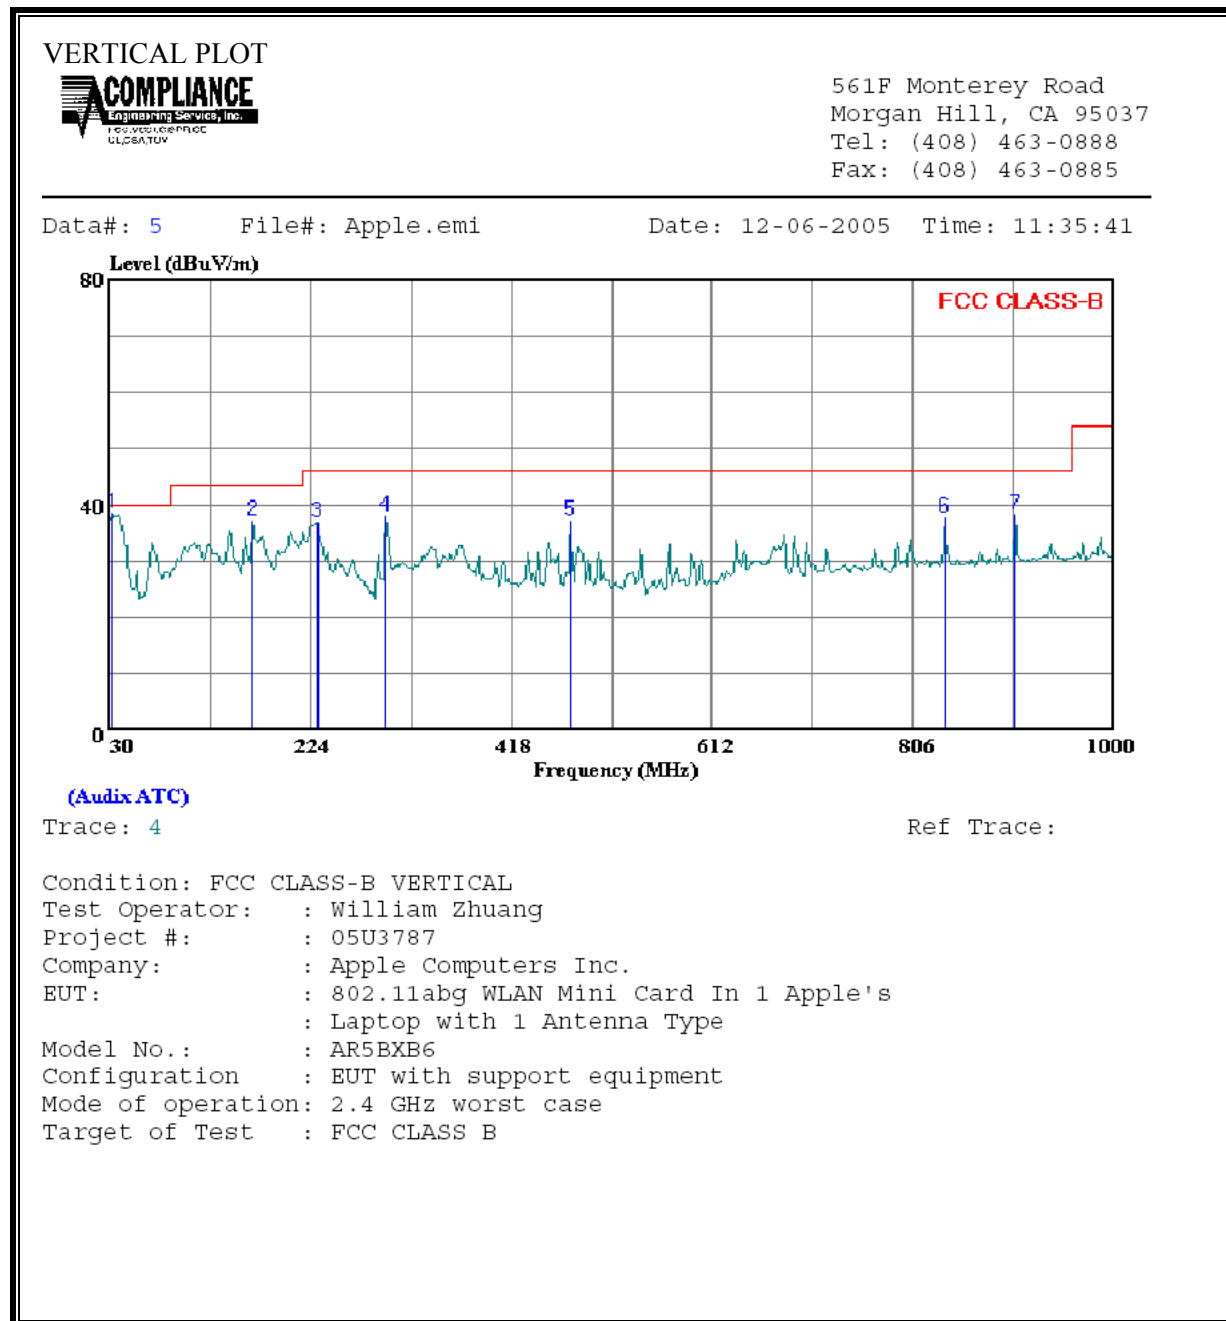

VERTICAL DATA

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	31.940	46.48	-8.01	38.47	40.00	-1.53	Peak
2	167.740	51.31	-14.20	37.11	43.50	-6.39	Peak
3	230.790	51.34	-14.56	36.78	46.00	-9.22	Peak
4	295.780	49.86	-12.05	37.81	46.00	-8.19	Peak
5	475.230	44.95	-7.78	37.17	46.00	-8.83	Peak
6	837.040	39.07	-1.53	37.54	46.00	-8.46	Peak
7	904.940	39.08	-0.95	38.13	46.00	-7.87	Peak


SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL A mode)

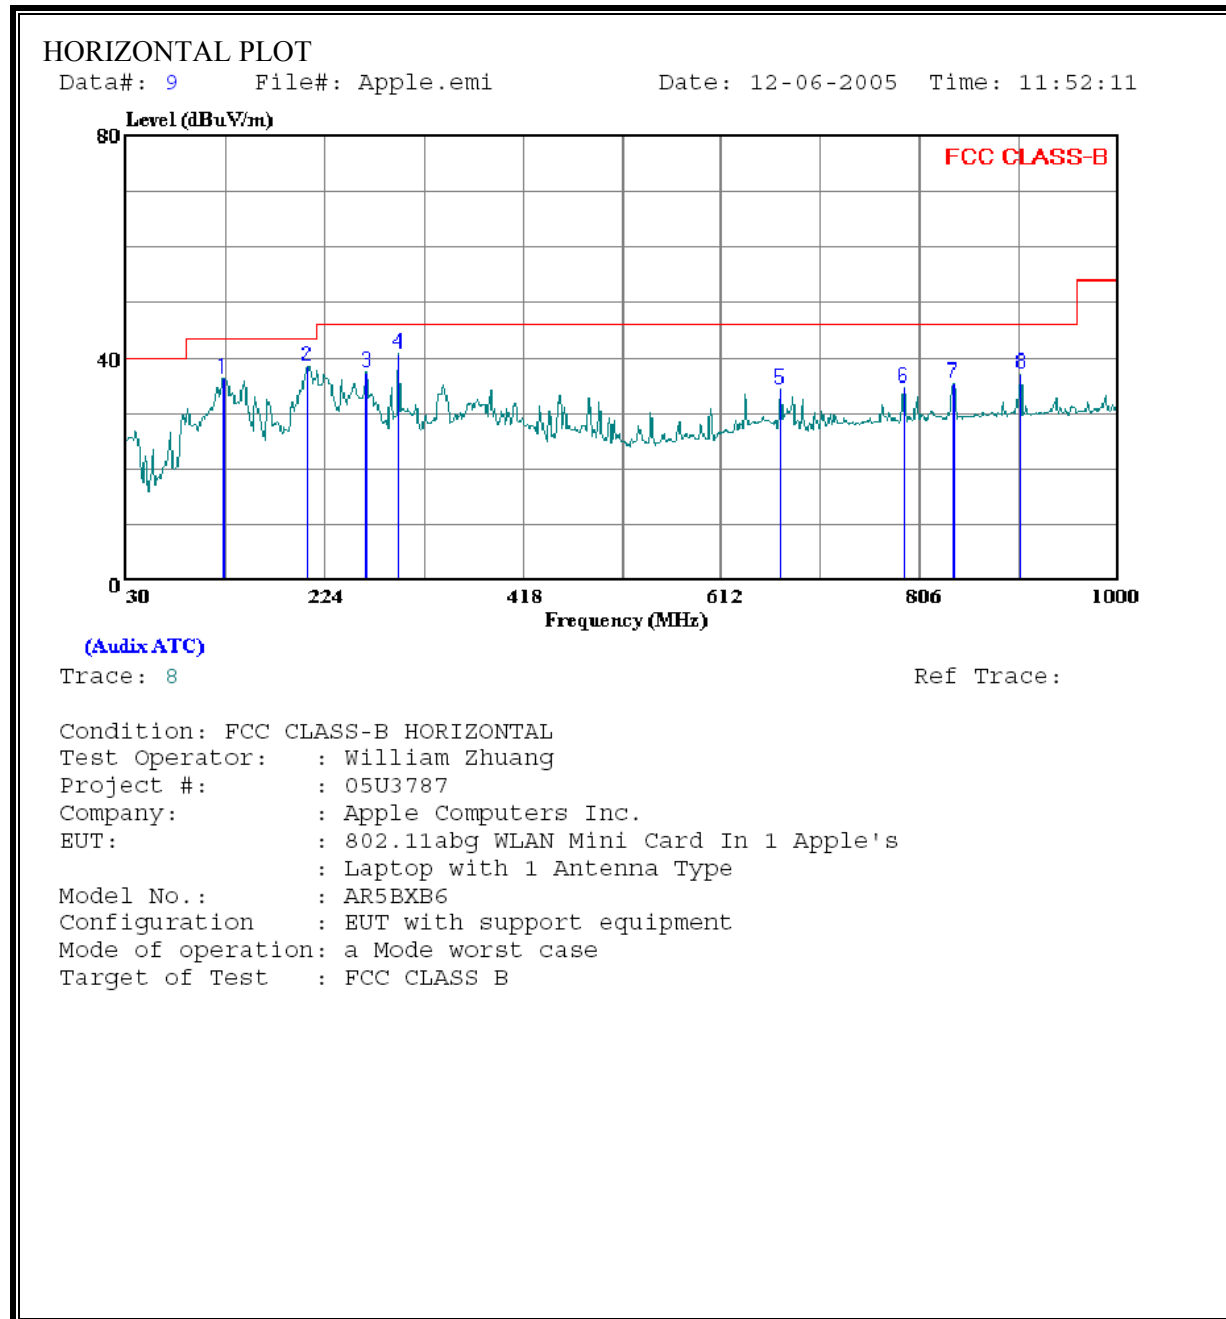

HORIZONTAL DATA

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	125.060	48.92	-12.55	36.38	43.50	-7.13	Peak
2	207.510	52.55	-14.11	38.44	43.50	-5.06	Peak
3	264.740	50.52	-13.21	37.32	46.00	-8.68	Peak
4	295.780	52.75	-12.05	40.70	46.00	-5.30	Peak
5	669.230	38.19	-3.80	34.39	46.00	-11.61	Peak
6	790.480	36.65	-1.95	34.70	46.00	-11.30	Peak
7	838.980	37.07	-1.53	35.54	46.00	-10.46	Peak
8	904.940	38.08	-0.95	37.13	46.00	-8.87	Peak

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL A mode)

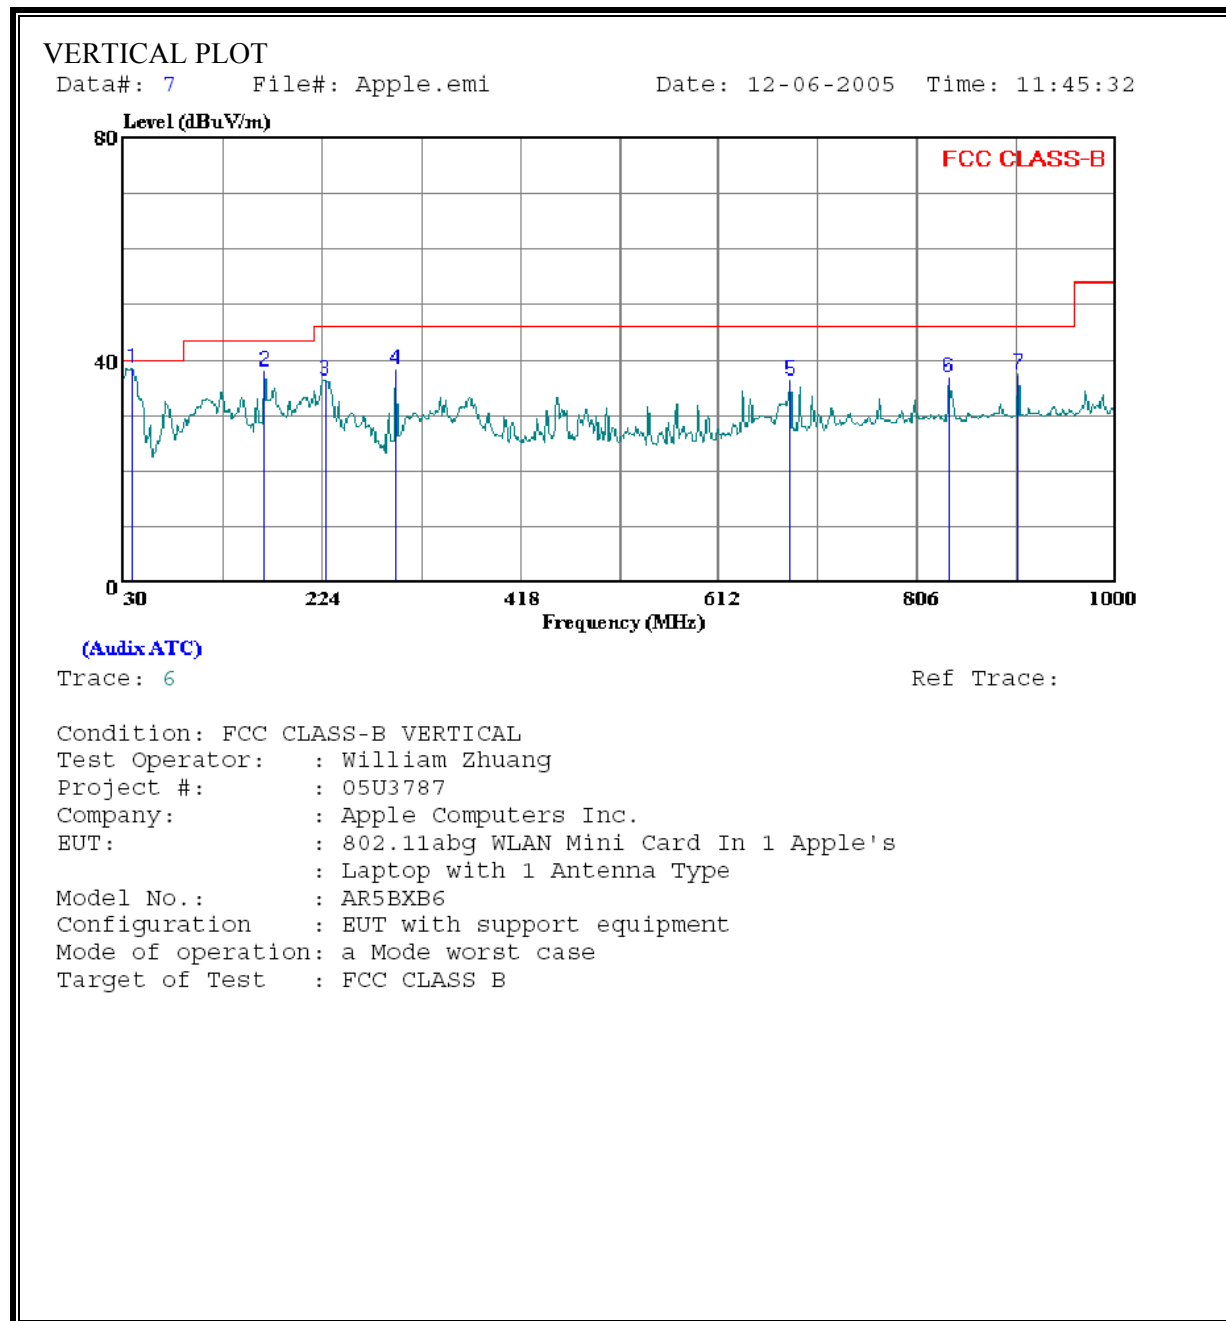

VERTICAL DATA

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	38.730	50.23	-11.81	38.42	40.00	-1.58	Peak
2	167.740	52.08	-14.20	37.88	43.50	-5.62	Peak
3	226.910	50.86	-14.71	36.15	46.00	-9.85	Peak
4	295.780	50.14	-12.05	38.09	46.00	-7.91	Peak
5	681.840	39.72	-3.45	36.27	46.00	-9.73	Peak
6	837.040	38.42	-1.53	36.89	46.00	-9.11	Peak
7	904.940	38.41	-0.95	37.46	46.00	-8.54	Peak

6.2.5. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz


SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

HORIZONTAL PLOT



561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 9 File#: Apple.emi Date: 12-06-2005 Time: 11:52:11

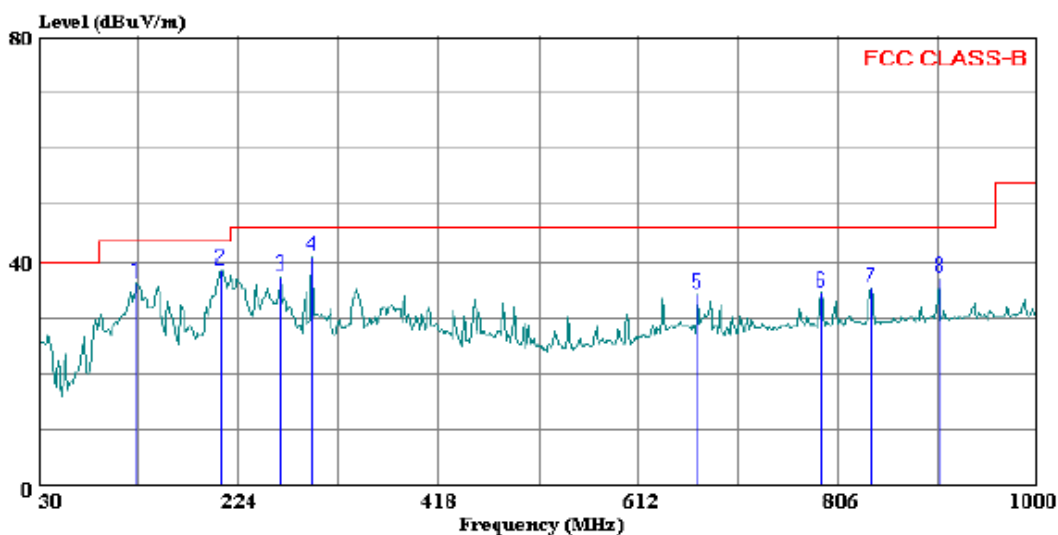

(Auxiliary ATC)

Trace: 8

Ref Trace:

Condition: FCC CLASS-B HORIZONTAL
Test Operator: : William Zhuang
Project #: : 05U3787
Company: : Apple Computers Inc.
EUT: : 802.11abg WLAN Mini Card In 1 Apple's
: Laptop with 1 Antenna Type
Model No.: : AR5BXB6
Configuration : EUT with support equipment
Mode of operation: a Mode worst case
Target of Test : FCC CLASS B

HORIZONTAL DATA

Page: 1

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	125.060	48.92	-12.55	36.38	43.50	-7.13	Peak
2	207.510	52.55	-14.11	38.44	43.50	-5.06	Peak
3	264.740	50.52	-13.21	37.32	46.00	-8.68	Peak
4	295.780	52.75	-12.05	40.70	46.00	-5.30	Peak
5	669.230	38.19	-3.80	34.39	46.00	-11.61	Peak
6	790.480	36.65	-1.95	34.70	46.00	-11.30	Peak
7	838.980	37.07	-1.53	35.54	46.00	-10.46	Peak
8	904.940	38.08	-0.95	37.13	46.00	-8.87	Peak


SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

VERTICAL PLOT



561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 7 File#: Apple.emi Date: 12-06-2005 Time: 11:45:32

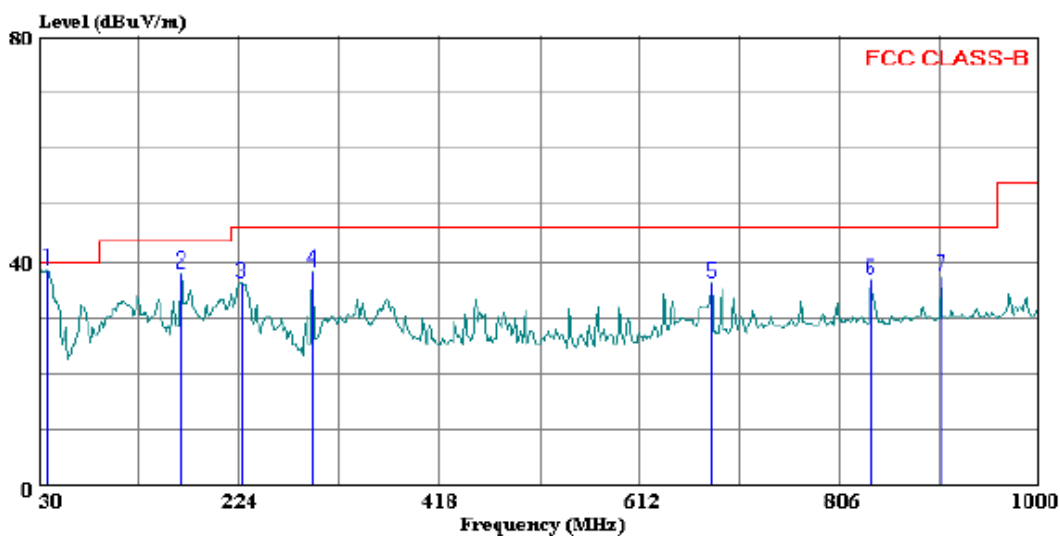

Trace: 6

Ref Trace:

Condition: FCC CLASS-B VERTICAL
Test Operator: : William Zhuang
Project #: : 05U3787
Company: : Apple Computers Inc.
EUT: : 802.11abg WLAN Mini Card In 1 Apple's
: Laptop with 1 Antenna Type
Model No.: : AR5BXB6
Configuration : EUT with support equipment
Mode of operation: a Mode worst case
Target of Test : FCC CLASS B

VERTICAL DATA

Page: 1

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	38.730	50.23	-11.81	38.42	40.00	-1.58	Peak
2	167.740	52.08	-14.20	37.88	43.50	-5.62	Peak
3	226.910	50.86	-14.71	36.15	46.00	-9.85	Peak
4	295.780	50.14	-12.05	38.09	46.00	-7.91	Peak
5	681.840	39.72	-3.45	36.27	46.00	-9.73	Peak
6	837.040	38.42	-1.53	36.89	46.00	-9.11	Peak
7	904.940	38.41	-0.95	37.46	46.00	-8.54	Peak