

System Check_Body_2450MHz_120424**DUT: D2450V2-SN:736**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL_2450_120424 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.966$ mho/m; $\epsilon_r =$

52.714; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: ET3DV6R - SN1788; ConvF(3.55, 3.55, 3.55); Calibrated: 2012/1/26;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2011/11/22
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP1127
- Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

Pin=250mW/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 14.5 mW/g



Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 84.855 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 33.541 mW/g

SAR(1 g) = 12.9 mW/g; SAR(10 g) = 5.79 mW/g

Maximum value of SAR (measured) = 14.1 mW/g

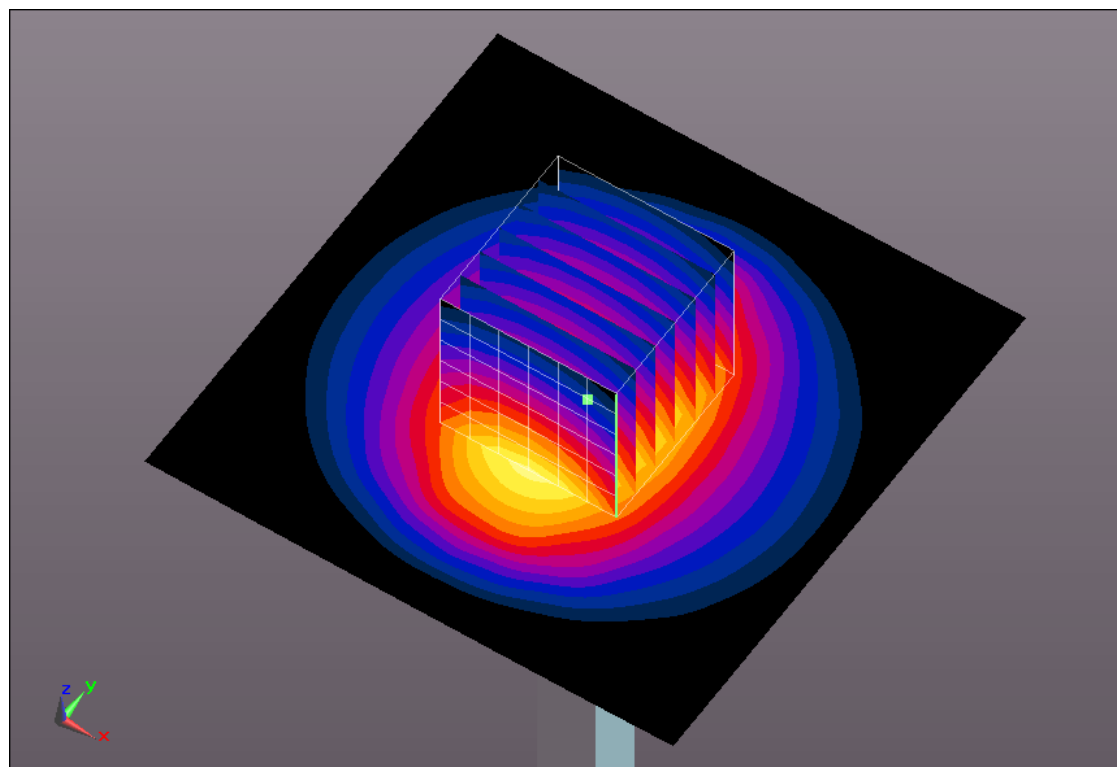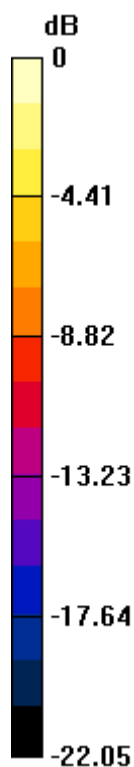

0 dB = 14.1 mW/g = 22.98 dB mW/g