

## FCC Part 15C Compliance Test Report

<b>Test Report no.:</b>	Tre_FCC_0804_10.doc	<b>Date of Report:</b>	19-Feb-2008
<b>Number of pages:</b>	40	<b>Customer's Contact person:</b>	Ralph Schwarz
<b>Testing laboratory:</b>	TCC Nokia Tampere Laboratory P.O. Box 68 Sinitaival 5 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880	<b>Customer:</b>	Nokia Corporation Lise Meitner Strasse 10 89081 ULM GERMANY Tel. +49 731 1754 0 Fax. +49 731 1754 6800
<b>FCC listing no.:</b>	94436		
<b>IC recognition no.:</b>	3608		
<b>Tested devices/ accessories:</b>	<b>GSM-Phone RM-379 / Battery BL- 4CT / AC-Charger AC-3E / Headset HS-47</b>		
<b>FCC ID:</b>	PPIRM-379	<b>IC:</b>	661U-RM379
<b>Supplement reports:</b>	-		
<b>Testing has been carried out in accordance with:</b>	<b>CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards RSS-GEN (Issue 2, June 2007) and RSS-210 (Issue 7, June 2007). Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".</b>		
<b>Documentation:</b>	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
<b>Test Results:</b>	<b>The EUT complies with the requirements in respect of all parameters subject to the test.</b> The test results relate only to devices specified in this document.		
<b>Date and signature for the contents:</b>			

Jari Jantunen, System Manager

## 1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	25-Jan-2008
Testing completed	07-Feb-2008
The customer's contact person	Ralph Schwarz
Test Plan referred to	T:\Projects\RM-379\TestPlan_RS\RS_test_plan_RM-379.xls
Notes	-
Document name	T:\Projects\RM-379\EMC\Results\FCC\Tre_FCC_0804_10.doc

### 1.1. EUT and Accessory Information

The EUT is a 3-band (GSM900/1800/1900) mobile phone with GPRS, EGPRS and Bluetooth. Bluetooth is tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
GSM-Phone	RM-379	004401016044436	0210	-	sp5.58	41392
GSM-Phone	RM-379	004401015992023	0210	-	sp5.58	41386
Battery	BL-4CT	-	V10	-	-	41389
AC-Charger	AC-3E	-	-	-	-	40843
AC-Charger	AC-3E	-	-	-	-	41293
Headset	HS-47	-	-	-	-	41390

### 1.2. Summary of Test Results

#### Bluetooth:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8.4 (2)	Conducted peak output power	PASSED
15.247(d)	A8.5	Band edge compliance of RF emissions	PASSED
15.247(d)	A8.5	Spurious RF conducted emissions	PASSED
15.247(d), 15.209	A8.5	Spurious radiated emissions	PASSED
15.207	7.2.2	AC powerline conducted emissions	PASSED
15.247(a)(1)	A8.1 (1)	20 dB bandwidth	PASSED
15.247(a)(1)	A8.1 (2)	Carrier frequency separation	PASSED
15.247(a)(1)(iii)	A8.1 (4)	Number of hopping frequencies	PASSED
15.247(a)(1)(iii)	A8.1 (4)	Time of occupancy	PASSED

PASSED

The EUT complies with the essential requirements in the standard.

FAILED

The EUT does not comply with the essential requirements in the standard.

NP

The test was not performed by the TCC Nokia Tampere Laboratory.

## CONTENTS


<b>1. Summary for FCC Part 15C Compliance Test Report.....</b>	<b>2</b>
1.1. EUT and Accessory Information .....	2
1.2. Summary of Test Results .....	2
<b>2. Test setups.....</b>	<b>5</b>
2.1. Conducted RF test setup .....	5
2.2. AC powerline conducted emissions test setup.....	5
2.3. Radiated test setup .....	5
<b>3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (2)) .....</b>	<b>6</b>
3.1. Test method and limit .....	6
3.2. Bluetooth Test results .....	7
<b>4. Band edge compliance of RF emissions (FCC §15.247(d), RSS-210 A8.5).....</b>	<b>10</b>
4.1. Test method and limit.....	10
4.2. Bluetooth Test results .....	11
<b>5. Spurious RF conducted emissions (FCC §15.247(d), RSS-A8.5).....</b>	<b>15</b>
5.1. Test method and limit.....	15
5.2. Bluetooth Test results .....	16
<b>6. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5).....</b>	<b>19</b>
6.1. Test method and limit.....	19
6.2. Bluetooth Test results .....	20
<b>7. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2) .....</b>	<b>23</b>
7.1. Test method and limit.....	23
7.2. Bluetooth Test results .....	24
<b>8. 20 dB bandwidth (FCC §15.247(a)(1), RSS-210 A8.1 (1)) .....</b>	<b>26</b>
8.1. Test method and limit.....	26
8.2. Bluetooth Test results .....	27
<b>9. Carrier frequency separation (FCC §15.247(a)(1), RSS-210 A8.1 (2)).....</b>	<b>30</b>
9.1. Test method and limit.....	30
9.2. Bluetooth Test results .....	31
<b>10. Number of hopping frequencies (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (4)).....</b>	<b>33</b>
10.1. Test method and limit.....	33
10.2. Bluetooth Test results .....	34
<b>11. Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (4)) .....</b>	<b>36</b>
11.1. Test method and limit.....	36
11.2. Bluetooth test results.....	37

---


<b>12.</b>	<b>Test Equipment .....</b>	<b>39</b>
12.1.	Conducted measurements .....	39
12.2.	Radiated measurements .....	39

## 2. Test setups


### 2.1. Conducted RF test setup

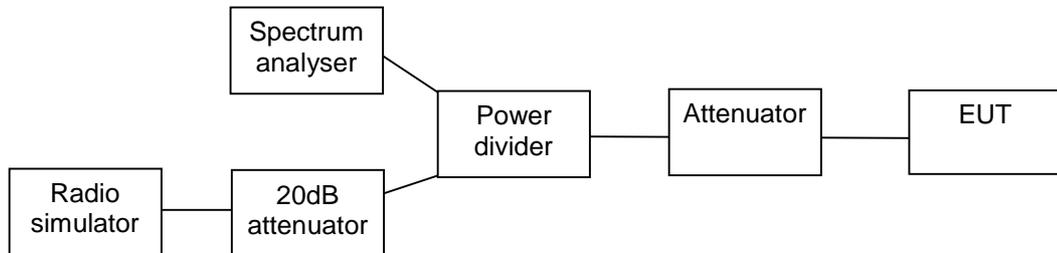

### 2.2. AC powerline conducted emissions test setup

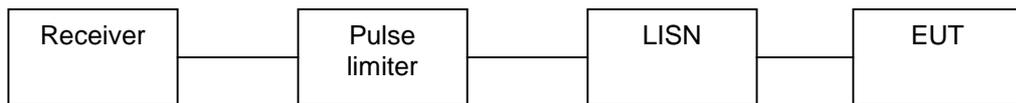

### 2.3. Radiated test setup

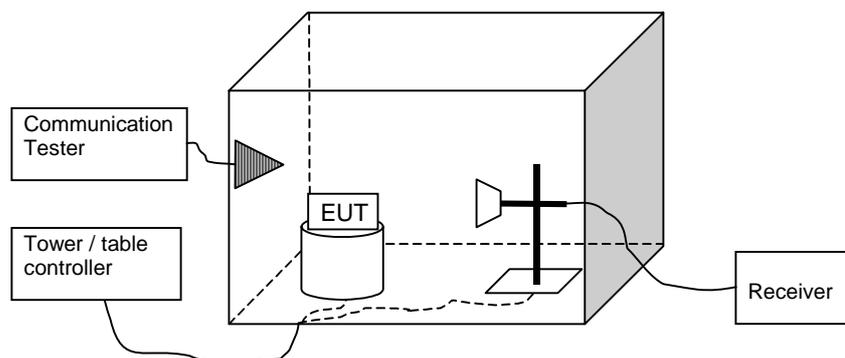

### 3. Conducted peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (2))

<b>EUT with DUT number</b>	RM-379 DUT 41392
<b>Accessories with DUT numbers</b>	AC-3E DUT 40843 / BL-4CT DUT 41389 / HS-47 DUT 41390
<b>Operation Voltage [V] / [Hz]</b>	Nominal
<b>Result</b>	PASSED
<b>Remarks</b>	-
<b>Temp [°C] / Humidity [%RH] / Air Pressure [kPa]</b>	20 / 50 / 101.8
<b>Date of measurements</b>	28-Jan-2008
<b>Measured by</b>	Petteri Suni

#### 3.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for conducted peak output power measurements


Frequency range [MHz]	Limit [W]	Limit [dBm]
2400 – 2483.5	≤ 1	≤ 30

### 3.2. Bluetooth Test results


#### 3.2.1 GFSK modulation, PRBS packet type

Channel / $f_c$ [MHz]	P [dBm]	P [mW]	Result
0 / 2402	-1.90	0.646	PASSED
40 / 2442	-1.50	0.708	PASSED
78 / 2480	-1.80	0.661	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

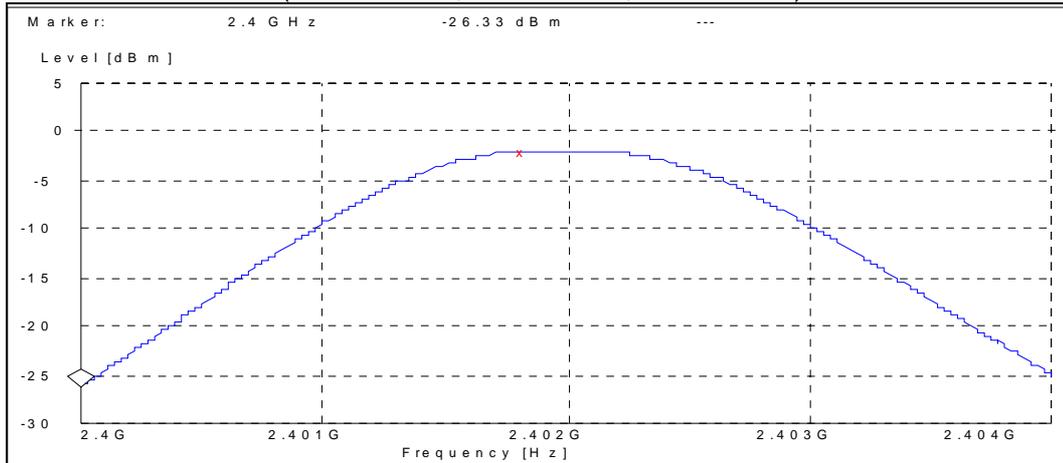

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

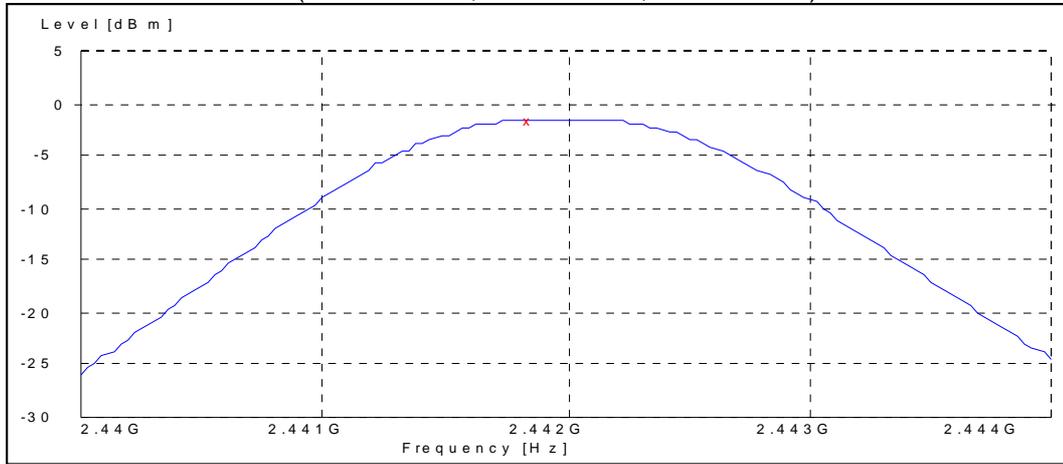


Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

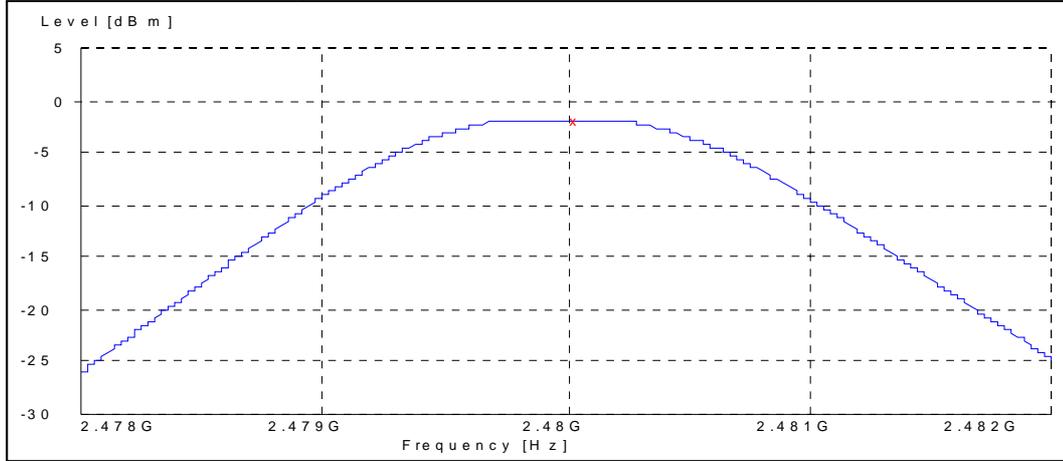


### 3.2.2 8DPSK modulation, PRBS packet type

Channel / $f_c$ [MHz]	P [dBm]	P [mW]	Result
0 / 2402	-0.20	0.955	PASSED
40 / 2442	0.00	1.000	PASSED
78 / 2480	-0.30	0.933	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

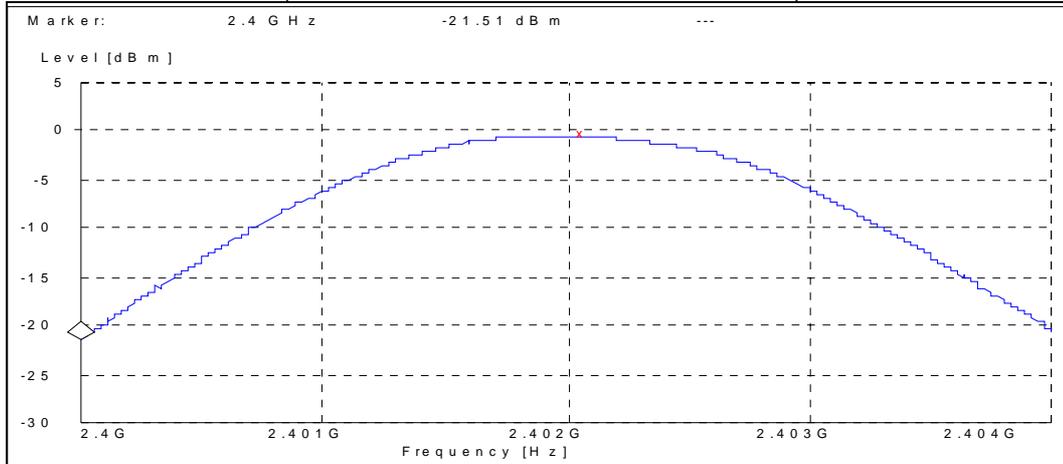

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

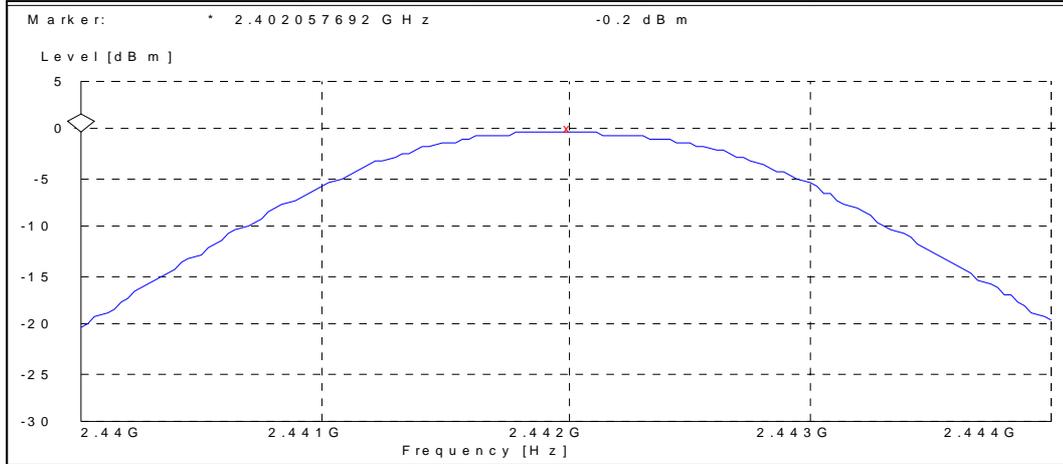

Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz, VBW: 3 MHz)

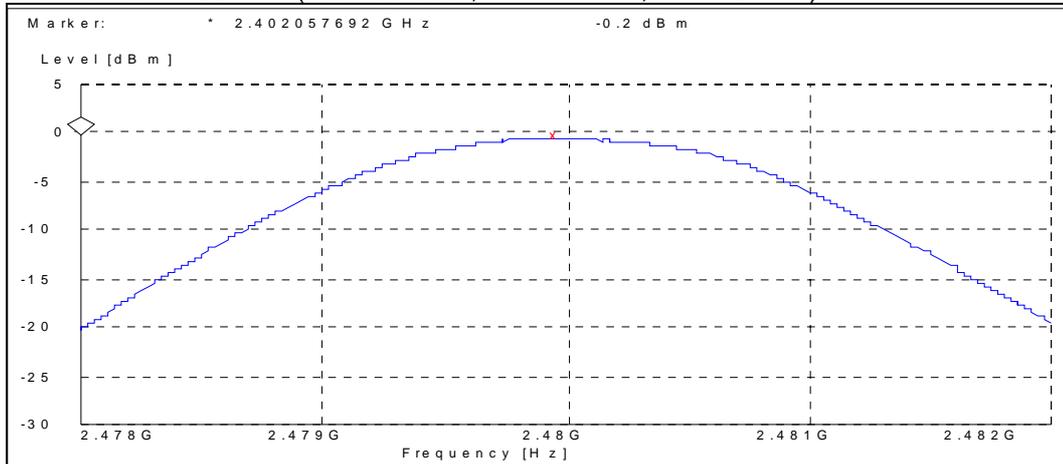

**4. Band edge compliance of RF emissions**  
(FCC §15.247(d), RSS-210 A8.5)

<b>EUT with DUT number</b>	RM-379 DUT 41386
<b>Accessories with DUT numbers</b>	AC-3E DUT 41293, BL-4CT DUT 41389, HS-47 DUT 41390
<b>Operation Voltage [V] / [Hz]</b>	115 / 60
<b>Result</b>	PASSED
<b>Remarks</b>	-
<b>Temp [°C] / Humidity [%RH] / Air Pressure [kPa]</b>	24 / 51 / 101.3
<b>Date of measurements</b>	06-Feb-2008
<b>Measured by</b>	Jari Jantunen

**4.1. Test method and limit**

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.


Limits for band edge compliance of RF emissions measurements (3 m measurement distance)

<b>Frequency range [MHz]</b>	<b>Limit Average [dBµV/m]</b>	<b>Limit Peak [dBµV/m]</b>
Below 2390 and above 2483.5	≤ 54	≤ 74

## 4.2. Bluetooth Test results


### 4.2.1 GFSK modulation, PRBS packet type

Channel 0 / 2402 MHz

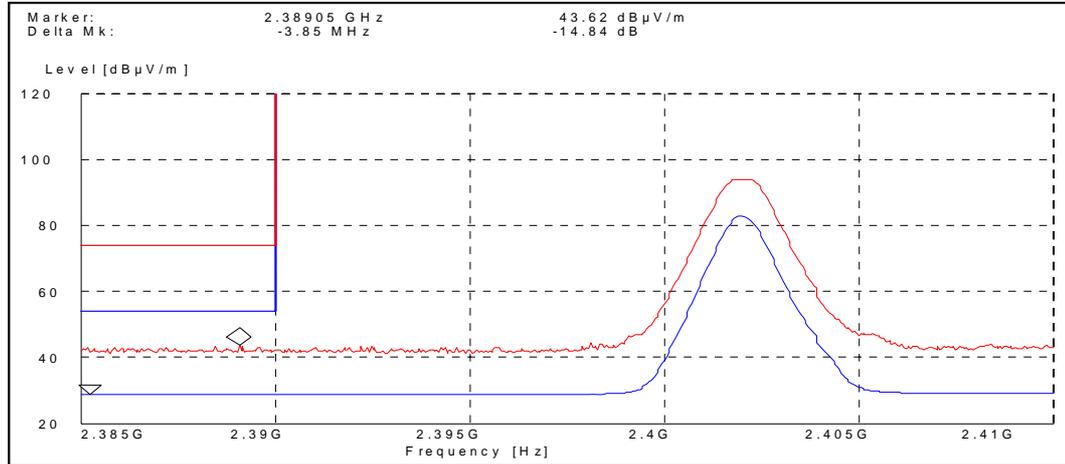


Detector (RBW: 1 MHz)	E [dBµV/m]	Result
Peak	43.60	PASSED
Average	28.80	PASSED

Channel 78 / 2480 MHz

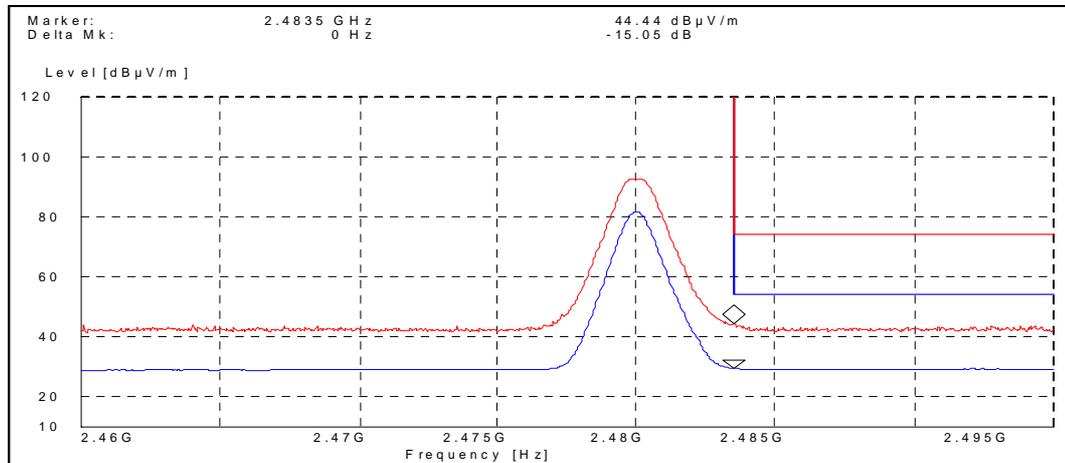


Detector (RBW: 1 MHz)	E [dBµV/m]	Result
Peak	44.40	PASSED
Average	29.40	PASSED

Hopping on, low end

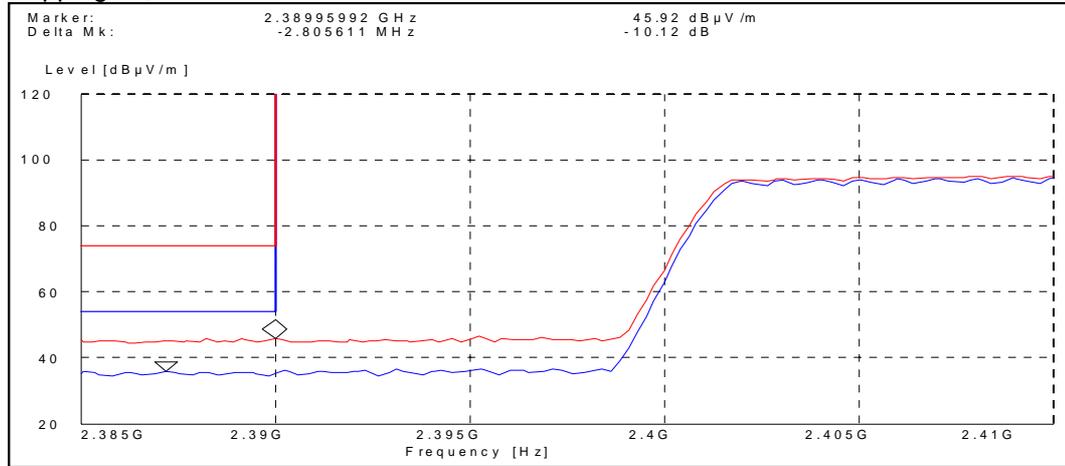

Detector (RBW: 1 MHz)	E [dBµV/m]	Result
Peak	45.90	PASSED
Average	35.80	PASSED


Hopping on, high end

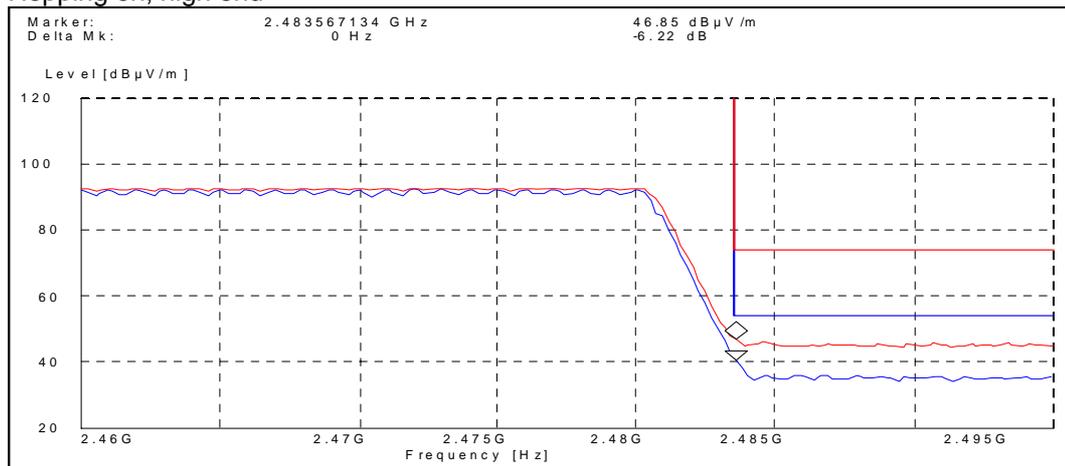

Detector (RBW: 1 MHz)	E [dBµV/m]	Result
Peak	46.90	PASSED
Average	40.60	PASSED


**4.2.2 8DPSK modulation, PRBS packet type**

**Channel 0 / 2402 MHz**

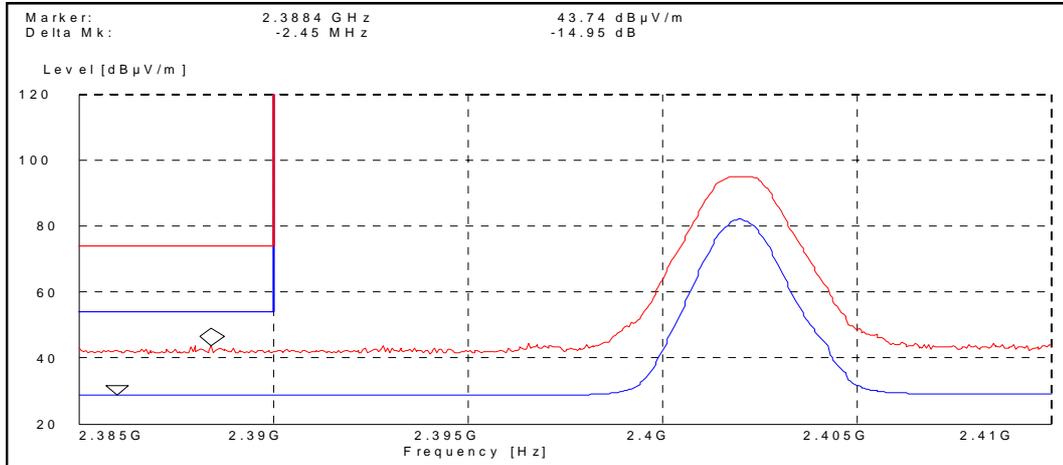


Detector (RBW: 1 MHz)	E [dBµV/m]	Result
Peak	43.70	PASSED
Average	28.80	PASSED

**Channel 78 / 2480 MHz**

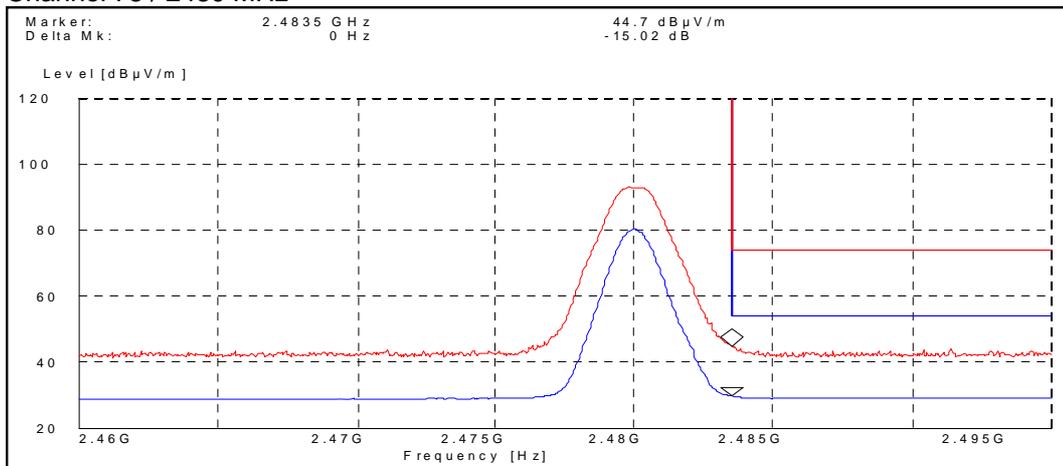


Detector (RBW: 1 MHz)	E [dBµV/m]	Result
Peak	44.70	PASSED
Average	29.70	PASSED

Hopping on, low end

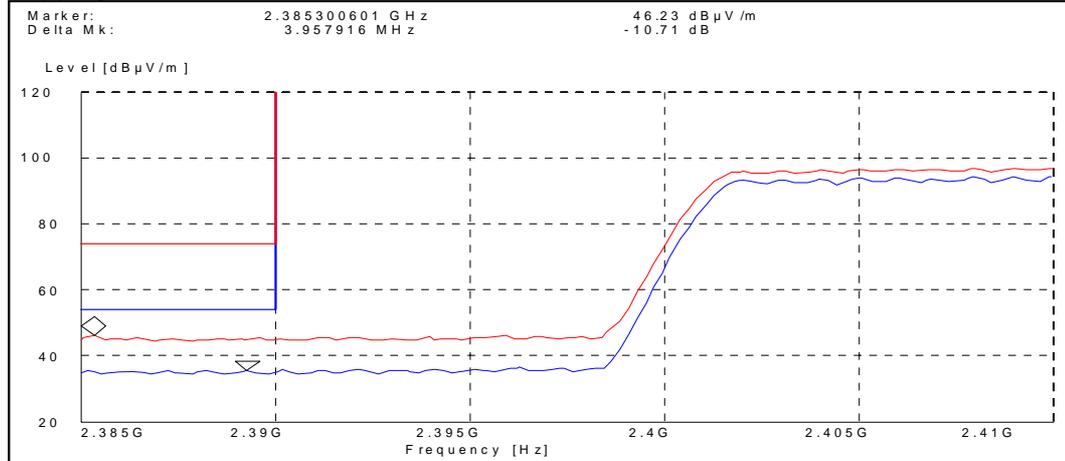

Detector (RBW: 1 MHz)	E [dBµV/m]	Result
Peak	46.20	PASSED
Average	35.50	PASSED

Hopping on, high end

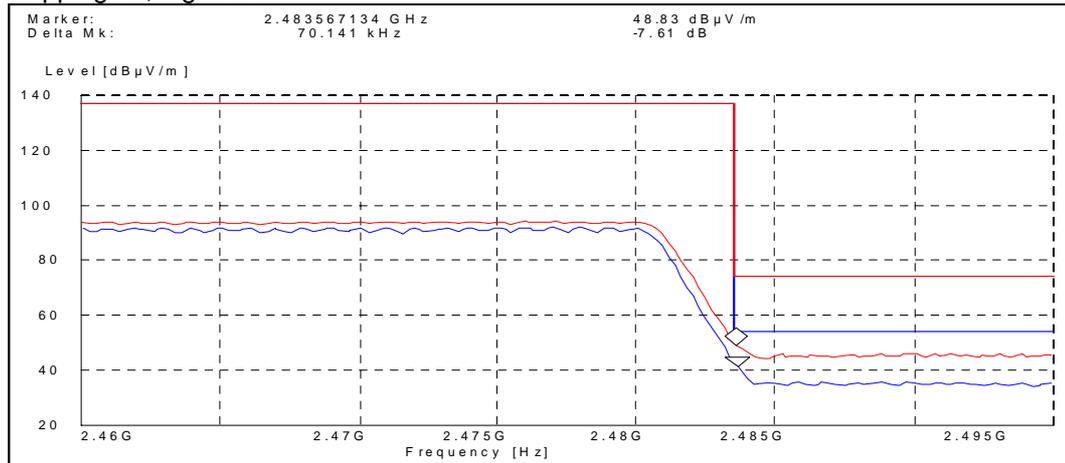

Detector (RBW: 1 MHz)	E [dBµV/m]	Result
Peak	48.80	PASSED
Average	41.20	PASSED

**5. Spurious RF conducted emissions**  
(FCC §15.247(d), RSS-A8.5)

<b>EUT with DUT number</b>	RM-379 DUT 41392
<b>Accessories with DUT numbers</b>	AC-3E DUT 40843 / BL-4CT DUT 41389 / HS-47 DUT 41390
<b>Operation Voltage [V] / [Hz]</b>	Nominal
<b>Result</b>	PASSED
<b>Remarks</b>	-
<b>Temp [°C] / Humidity [%RH] / Air Pressure [kPa]</b>	20 / 50 / 101.8
<b>Date of measurements</b>	28-Jan-2008
<b>Measured by</b>	Petteri Suni

**5.1. Test method and limit**

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.


Limits for spurious RF conducted emissions measurements

<b>Frequency range [MHz]</b>	<b>Limit [dBc]</b>
1 – 25000	≤ -20

## 5.2. Bluetooth Test results

### 5.2.1 GFSK modulation, PRBS packet type


Channel 0 / 2402 MHz

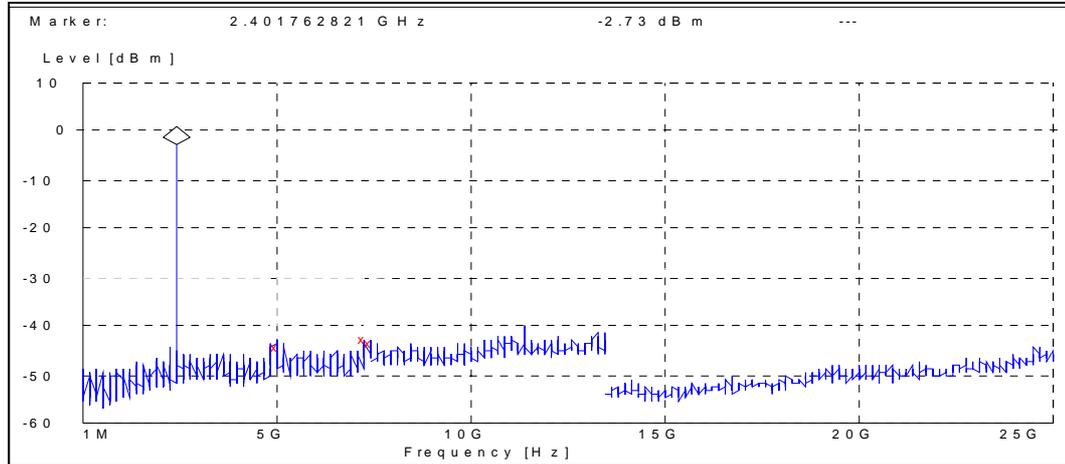

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4982.371795	-41.469666	PASSED
7318.750000	-40.169666	PASSED
7500.000000	-41.169666	PASSED


Channel 40 / 2442 MHz

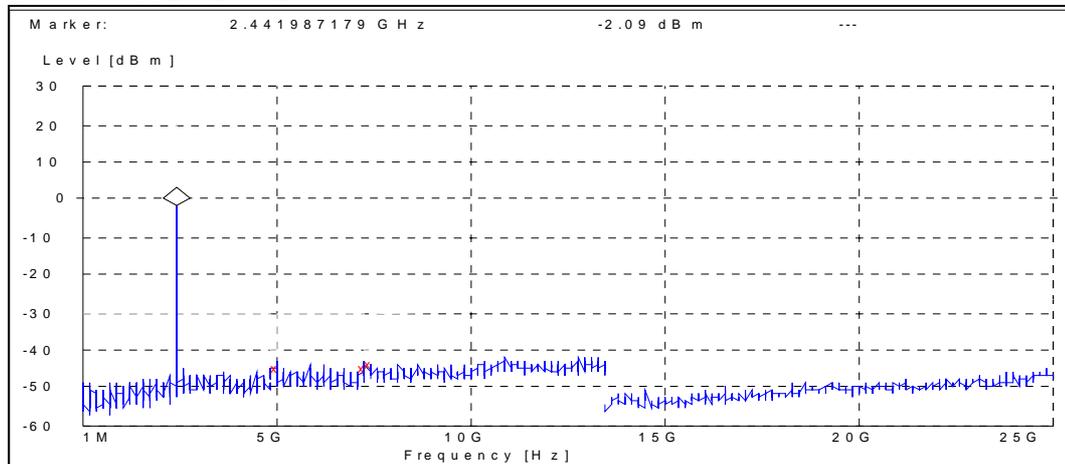

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4951.282051	-42.712722	PASSED
7255.288462	-42.312722	PASSED
7500.000000	-41.812722	PASSED

Channel 78 / 2480 MHz

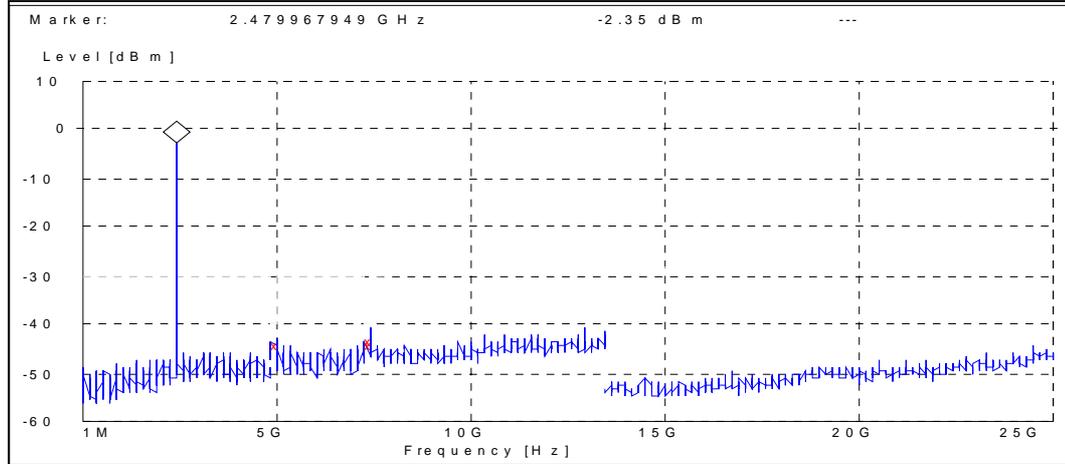


Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4985.256410	-41.854724	PASSED
7422.596154	-41.654724	PASSED
7500.000000	-42.154724	PASSED

5.2.2 8DPSK modulation, PRBS packet type


Channel 0 / 2402 MHz

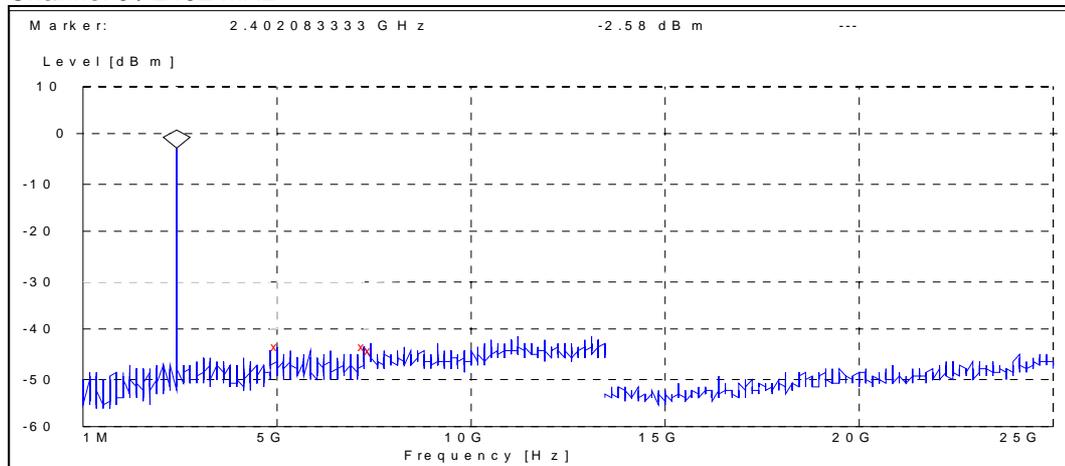

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4951.602564	-40.819807	PASSED
7339.903846	-40.919807	PASSED
7500.000000	-41.819807	PASSED


Channel 40 / 2442 MHz

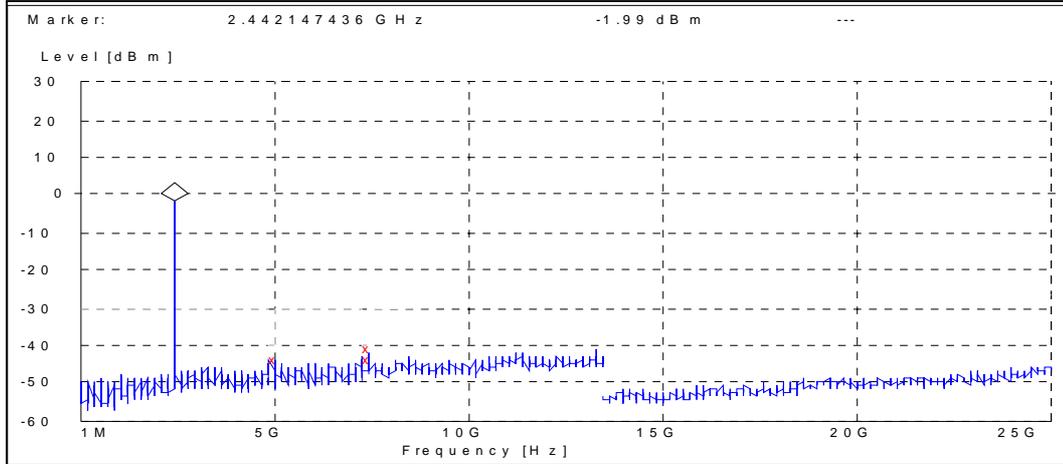

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4956.410256	-42.012332	PASSED
7422.596154	-39.312332	PASSED
7500.000000	-42.012332	PASSED

Channel 78 / 2480 MHz

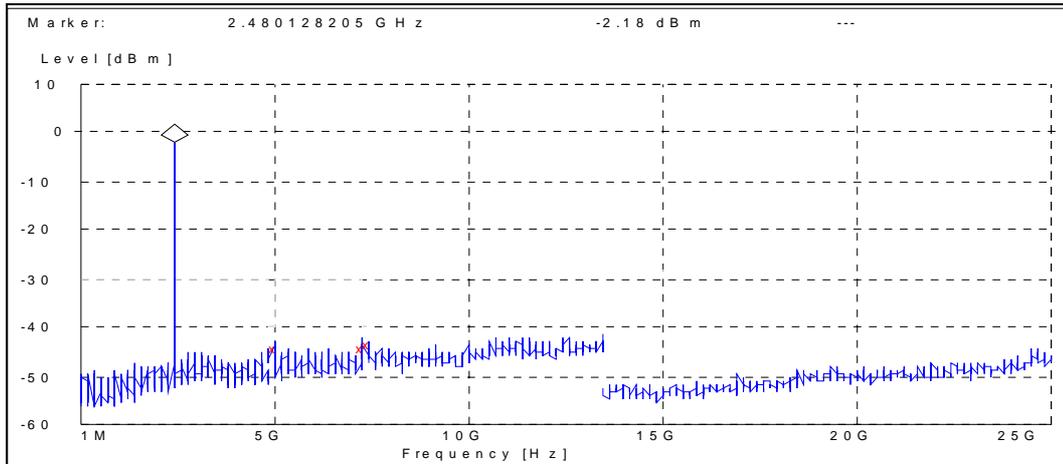

Peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	P [dBc]	Result
4957.051282	-42.120843	PASSED
7219.230769	-42.120843	PASSED
7500.000000	-41.220843	PASSED

## 6. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5)

<b>EUT with DUT number</b>	RM-379 DUT 41386
<b>Accessories with DUT numbers</b>	AC-3E DUT 41293, BL-4CT DUT 41389, HS-47 DUT 41390
<b>Operation Voltage [V] / [Hz]</b>	115 / 60
<b>Result</b>	PASSED
<b>Remarks</b>	-
<b>Temp [°C] / Humidity [%RH] / Air Pressure [kPa]</b>	24 / 51 / 101.3
<b>Date of measurements</b>	06-Feb-2008
<b>Measured by</b>	Jari Jantunen

### 6.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu\text{V/m}] = U_{RX} + A_{TOT}$$

Where  $U_{RX}$  is receiver reading and  $A_{TOT}$  is total correction factor including cable loss, antenna factor and preamplifier gain ( $A_{TOT} = L_{CABLES} + AF - G_{PREAMP}$ ).

Limits for spurious radiated emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit [ $\mu\text{V/m}$ ]	Limit [dB $\mu\text{V/m}$ ]	Detector
30 – 88	100	40	Quasi peak
88 – 216	150	43.5	Quasi peak
216 – 960	200	46	Quasi peak
960 – 1000	500	54	Quasi peak
Above 1000	500	54	Average
Above 1000	5000	74	Peak

## 6.2. Bluetooth Test results

### 6.2.1 GFSK modulation, PRBS packet type

Channel 0 / 2402 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$ ]	E [ $\mu\text{V/m}$ ]	U <sub>RX</sub> [dB $\mu\text{V}$ ]	A <sub>TOT</sub> [dB]	Polarisation	Result
4804.000000	38.60	85.11	40.40	-1.8	VERTICAL	PASSED
7206.000000	42.10	127.35	39.50	2.6	VERTICAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$ ]	E [ $\mu\text{V/m}$ ]	U <sub>RX</sub> [dB $\mu\text{V}$ ]	A <sub>TOT</sub> [dB]	Polarisation	Result
4804.000000	26.10	20.18	27.90	-1.8	VERTICAL	PASSED
7206.000000	29.20	28.84	26.60	2.6	HORIZONTAL	PASSED

Channel 40 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$ ]	E [ $\mu\text{V/m}$ ]	U <sub>RX</sub> [dB $\mu\text{V}$ ]	A <sub>TOT</sub> [dB]	Polarisation	Result
38.235872	28.20	25.70	43.20	-15.0	VERTICAL	PASSED
52.264729	24.30	16.41	48.20	-23.9	VERTICAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$ ]	E [ $\mu\text{V/m}$ ]	U <sub>RX</sub> [dB $\mu\text{V}$ ]	A <sub>TOT</sub> [dB]	Polarisation	Result
7278.565130	43.50	149.62	40.50	3.0	HORIZONTAL	PASSED
7339.171343	43.40	147.91	40.30	3.1	VERTICAL	PASSED
7415.337675	43.40	147.91	39.70	3.7	HORIZONTAL	PASSED
7420.843687	43.50	149.62	39.80	3.7	VERTICAL	PASSED
17971.943888	53.20	457.09	33.70	19.5	HORIZONTAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$ ]	E [ $\mu\text{V/m}$ ]	U <sub>RX</sub> [dB $\mu\text{V}$ ]	A <sub>TOT</sub> [dB]	Polarisation	Result
7281.065130	30.30	32.73	27.30	3.0	HORIZONTAL	PASSED
7335.171343	30.10	31.99	27.00	3.1	VERTICAL	PASSED
7419.343687	30.70	34.28	27.00	3.7	VERTICAL	PASSED
7422.837675	30.60	33.88	26.90	3.7	HORIZONTAL	PASSED
17971.943888	40.40	104.71	20.90	19.5	HORIZONTAL	PASSED

Channel 78 / 2480 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu$ V/m]	E [ $\mu$ V/m]	U <sub>RX</sub> [dB $\mu$ V]	A <sub>TOT</sub> [dB]	Polarisation	Result
4960.000000	40.40	104.71	41.70	-1.3	VERTICAL	PASSED
7440.000000	43.90	156.68	40.30	3.6	HORIZONTAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu$ V/m]	E [ $\mu$ V/m]	U <sub>RX</sub> [dB $\mu$ V]	A <sub>TOT</sub> [dB]	Polarisation	Result
4960.000000	27.10	22.65	28.40	-1.3	VERTICAL	PASSED
7440.000000	30.50	33.50	26.90	3.6	VERTICAL	PASSED

## 6.2.2 8DPSK modulation, PRBS packet type

Channel 0 / 2402 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu$ V/m]	E [ $\mu$ V/m]	U <sub>RX</sub> [dB $\mu$ V]	A <sub>TOT</sub> [dB]	Polarisation	Result
4804.000000	38.90	88.10	40.70	-1.8	VERTICAL	PASSED
7206.000000	42.70	136.46	40.10	2.6	VERTICAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu$ V/m]	E [ $\mu$ V/m]	U <sub>RX</sub> [dB $\mu$ V]	A <sub>TOT</sub> [dB]	Polarisation	Result
4804.000000	26.60	21.38	28.40	-1.8	VERTICAL	PASSED
7206.000000	29.20	28.84	26.60	2.6	VERTICAL	PASSED

Channel 40 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dB $\mu$ V/m]	E [ $\mu$ V/m]	U <sub>RX</sub> [dB $\mu$ V]	A <sub>TOT</sub> [dB]	Polarisation	Result
38.135872	23.30	14.62	38.20	-14.9	VERTICAL	PASSED
51.062325	24.40	16.60	47.60	-23.2	HORIZONTAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu$ V/m]	E [ $\mu$ V/m]	U <sub>RX</sub> [dB $\mu$ V]	A <sub>TOT</sub> [dB]	Polarisation	Result
4956.411824	40.00	100.00	41.30	-1.3	HORIZONTAL	PASSED
7283.069138	43.30	146.22	40.30	3.0	HORIZONTAL	PASSED
7300.607214	43.10	142.89	40.00	3.1	HORIZONTAL	PASSED
7390.287575	43.50	149.62	39.90	3.6	VERTICAL	PASSED
7400.303607	43.10	142.89	39.40	3.7	HORIZONTAL	PASSED
17925.345691	53.00	446.68	33.50	19.5	VERTICAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu$ V/m]	E [ $\mu$ V/m]	U <sub>RX</sub> [dB $\mu$ V]	A <sub>TOT</sub> [dB]	Polarisation	Result
4953.411824	27.00	22.39	28.40	-1.4	HORIZONTAL	PASSED
4966.433868	27.10	22.65	28.30	-1.2	HORIZONTAL	PASSED
7287.569138	30.20	32.36	27.20	3.0	HORIZONTAL	PASSED
7304.607214	29.90	31.26	26.90	3.0	HORIZONTAL	PASSED
7393.787575	30.50	33.50	26.90	3.6	VERTICAL	PASSED
7404.803607	30.50	33.50	26.80	3.7	HORIZONTAL	PASSED
17923.845691	40.40	104.71	20.90	19.5	VERTICAL	PASSED

Channel 78 / 2480 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu$ V/m]	E [ $\mu$ V/m]	U <sub>RX</sub> [dB $\mu$ V]	A <sub>TOT</sub> [dB]	Polarisation	Result
4960.000000	40.30	103.51	41.60	-1.3	VERTICAL	PASSED
7440.000000	43.30	146.22	39.70	3.6	VERTICAL	PASSED

Average (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB $\mu$ V/m]	E [ $\mu$ V/m]	U <sub>RX</sub> [dB $\mu$ V]	A <sub>TOT</sub> [dB]	Polarisation	Result
4960.000000	27.20	22.91	28.50	-1.3	VERTICAL	PASSED
7440.000000	30.40	33.11	26.80	3.6	VERTICAL	PASSED

## 7. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)

<b>EUT with DUT number</b>	RM-379 DUT 41386
<b>Accessories with DUT numbers</b>	AC-3E DUT 41293, BL-4CT DUT 41389, HS-47 DUT 41390
<b>Operation Voltage [V] / [Hz]</b>	115 / 60
<b>Result</b>	PASSED
<b>Remarks</b>	-
<b>Temp [°C] / Humidity [%RH] / Air Pressure [kPa]</b>	19 / 49 / 101.7
<b>Date of measurements</b>	07-Feb-2008
<b>Measured by</b>	Jari Jantunen

### 7.1. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-GEN as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$

Where  $U_{RX}$  is receiver reading and  $A_{TOT}$  is total correction factor including cable and pulse limiter attenuations.


CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

## 7.2. Bluetooth Test results

### 7.2.1 GFSK modulation, PRBS packet type

Channel 40 / 2442 MHz

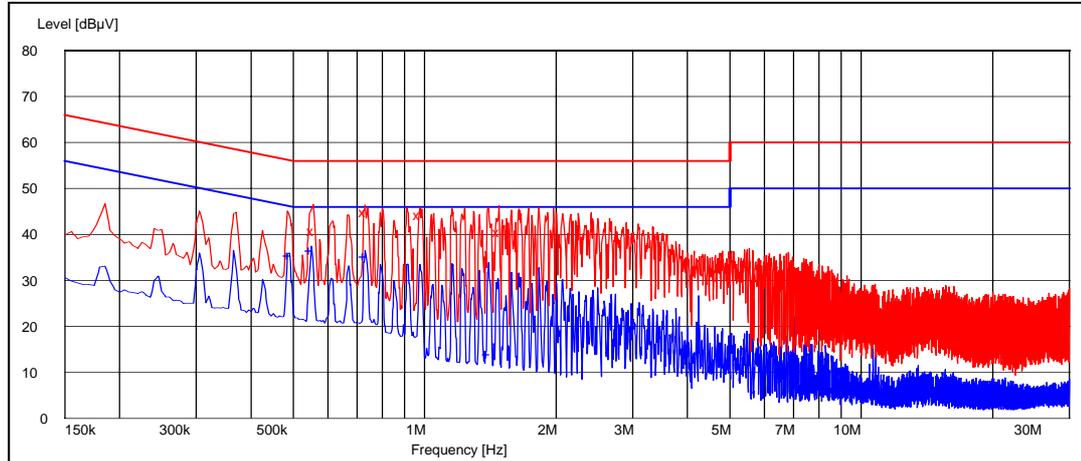

Quasi peak (RBW: 9 kHz)


Frequency [MHz]	U [dBµV]	Line	Result
0.555000	40.80	L1	PASSED
0.730000	44.70	L1	PASSED
0.975000	44.10	L1	PASSED
1.480000	40.60	L1	PASSED

Average (RBW: 9 kHz)

Frequency [MHz]	U [dBµV]	Line	Result
0.490000	35.60	L1	PASSED
0.550000	36.60	L1	PASSED
0.730000	35.30	L1	PASSED
1.400000	14.10	L1	PASSED

**7.2.2 8DPSK modulation, PRBS packet type**

Channel 40 / 2442 MHz

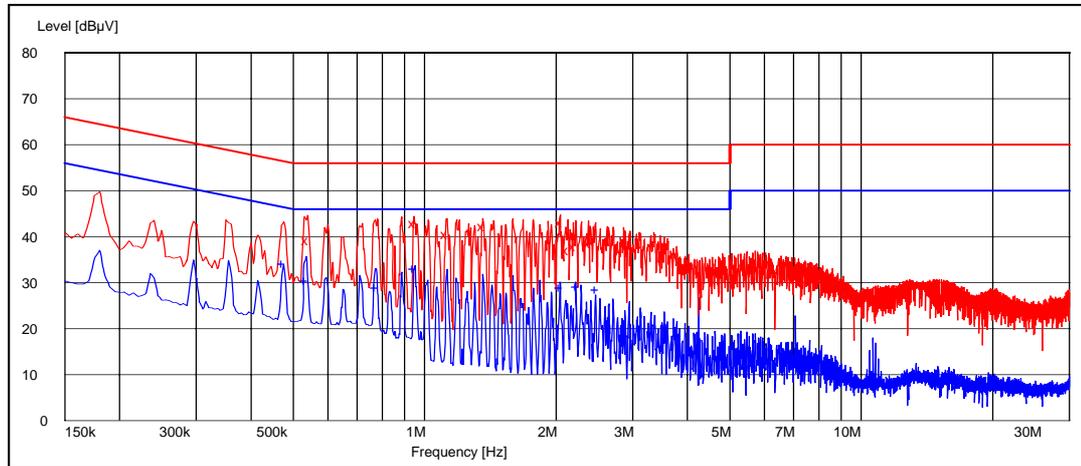

Quasi peak (RBW: 9 kHz)

Frequency [MHz]	U [dBµV]	Line	Result
0.540000	39.20	L1	PASSED
0.950000	42.90	L1	PASSED
1.125000	40.60	L1	PASSED
1.365000	42.30	L1	PASSED
2.060000	43.20	L1	PASSED
2.130000	37.00	N	PASSED
2.210000	37.90	L1	PASSED
2.395000	38.50	L1	PASSED

Average (RBW: 9 kHz)

Frequency [MHz]	U [dBµV]	Line	Result
0.475000	34.10	L1	PASSED
0.535000	30.50	N	PASSED
0.775000	29.00	N	PASSED
0.950000	33.10	L1	PASSED
2.055000	29.10	L1	PASSED
2.240000	29.30	L1	PASSED
2.485000	28.70	L1	PASSED

**8. 20 dB bandwidth**  
(FCC §15.247(a)(1), RSS-210 A8.1 (1))

<b>EUT with DUT number</b>	RM-379 DUT 41392
<b>Accessories with DUT numbers</b>	AC-3E DUT 40843 / BL-4CT DUT 41389 / HS-47 DUT 41390
<b>Operation Voltage [V] / [Hz]</b>	Nominal
<b>Result</b>	PASSED
<b>Remarks</b>	-
<b>Temp [°C] / Humidity [%RH] / Air Pressure [kPa]</b>	20 / 50 / 101.8
<b>Date of measurements</b>	28-Jan-2008
<b>Measured by</b>	Petteri Suni

**8.1. Test method and limit**

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for 20 dB bandwidth measurements


<b>Limit [MHz]</b>
N/A

## 8.2. Bluetooth Test results


### 8.2.1 GFSK modulation, PRBS packet type

Channel / $f_c$ [MHz]	20 dB bandwidth [kHz]	Result
0 / 2402	900.641	PASSED
40 / 2442	900.641	PASSED
78 / 2480	900.641	PASSED


Channel 0 / 2402 MHz

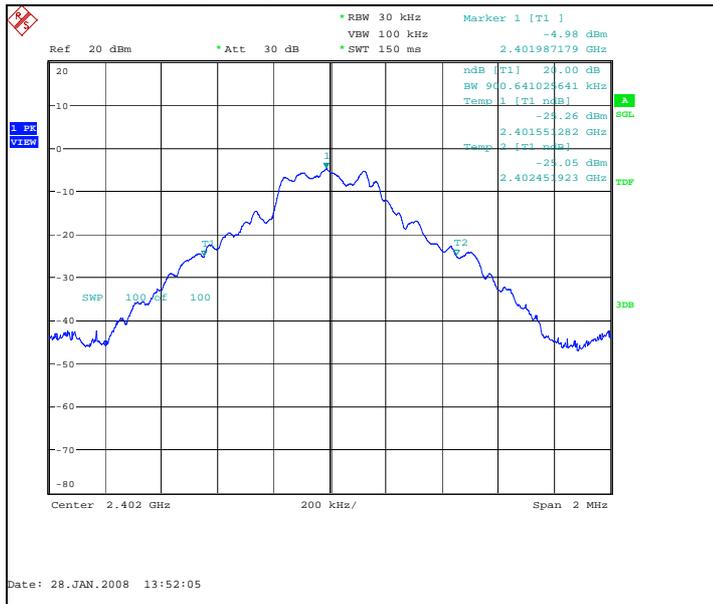

Channel 40 / 2442 MHz

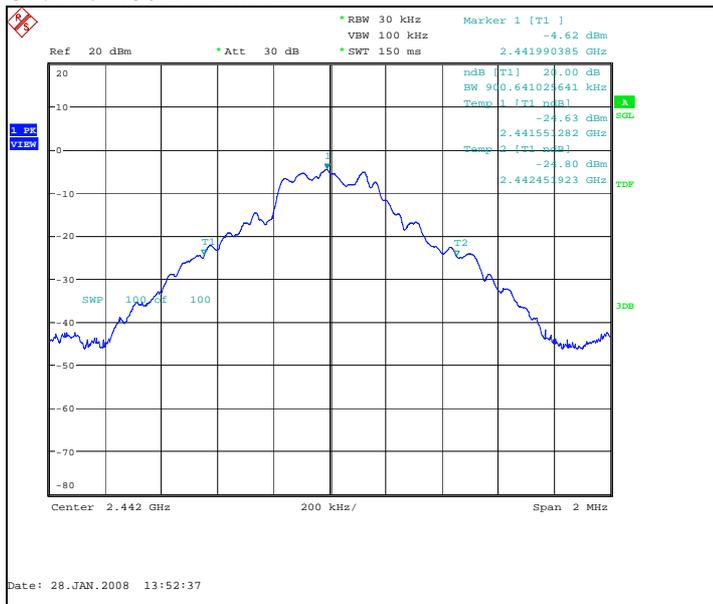


Channel 78 / 2480 MHz

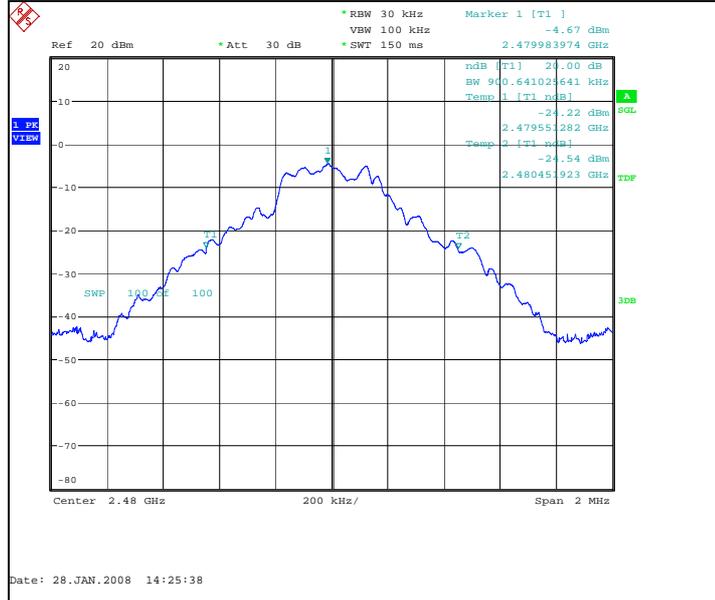

8.2.2 8DPSK modulation, PRBS packet type

Channel / $f_c$ [MHz]	20 dB bandwidth [kHz]	Result
0 / 2402	1310.897	PASSED
40 / 2442	1310.897	PASSED
78 / 2480	1314.103	PASSED


Channel 0 / 2402 MHz

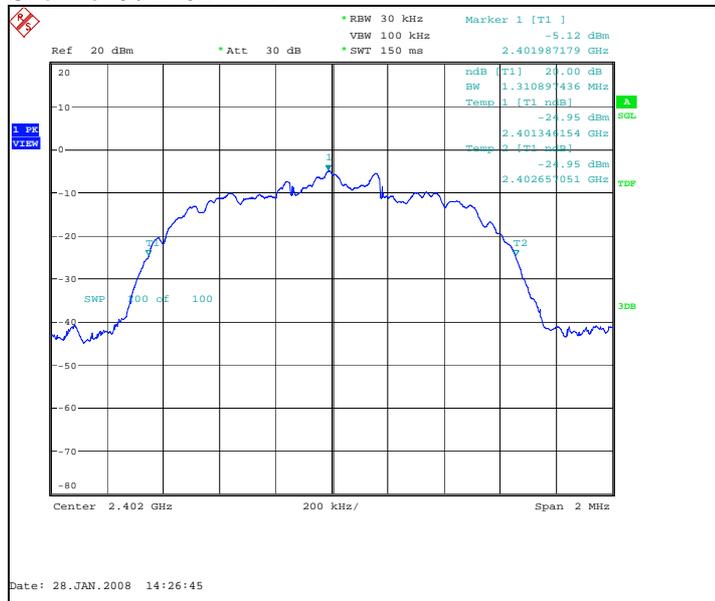

Channel 40 / 2442 MHz



Channel 78 / 2480 MHz

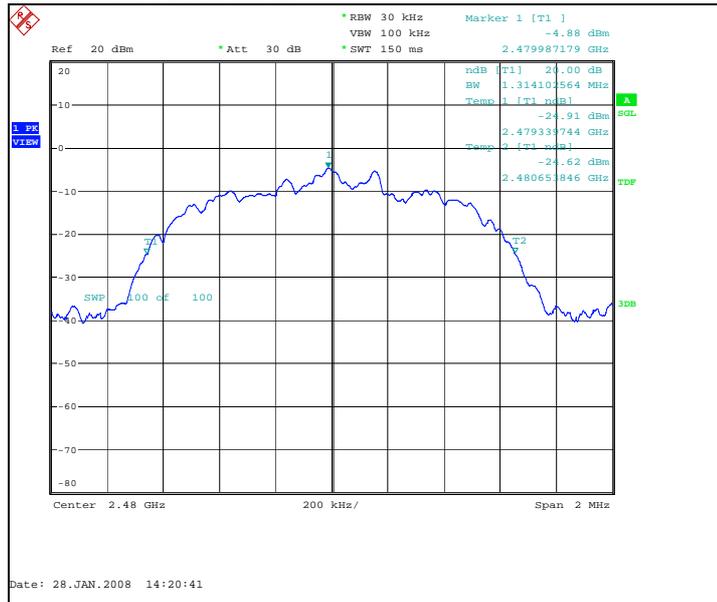

**9. Carrier frequency separation**  
(FCC §15.247(a)(1), RSS-210 A8.1 (2))

<b>EUT with DUT number</b>	RM-379 DUT 41392
<b>Accessories with DUT numbers</b>	AC-3E DUT 40843 / BL-4CT DUT 41389 / HS-47 DUT 41390
<b>Operation Voltage [V] / [Hz]</b>	Nominal
<b>Result</b>	PASSED
<b>Remarks</b>	-
<b>Temp [°C] / Humidity [%RH] / Air Pressure [kPa]</b>	20 / 50 / 101.8
<b>Date of measurements</b>	28-Jan-2008
<b>Measured by</b>	Petteri Suni

**9.1. Test method and limit**

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for carrier frequency separation measurements


<b>Limit [MHz]</b>
≥ 0.025 or 2/3 of the 20 dB bandwidth

## 9.2. Bluetooth Test results

### 9.2.1 GFSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
1001.603	PASSED


Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

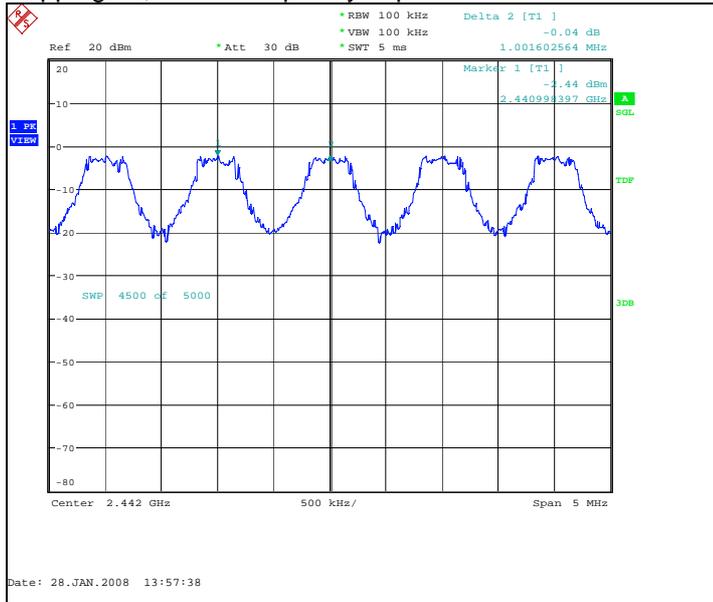

**9.2.2 8DPSK modulation, PRBS packet type**

Carrier frequency separation [kHz]	Result
1081.731	PASSED

Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

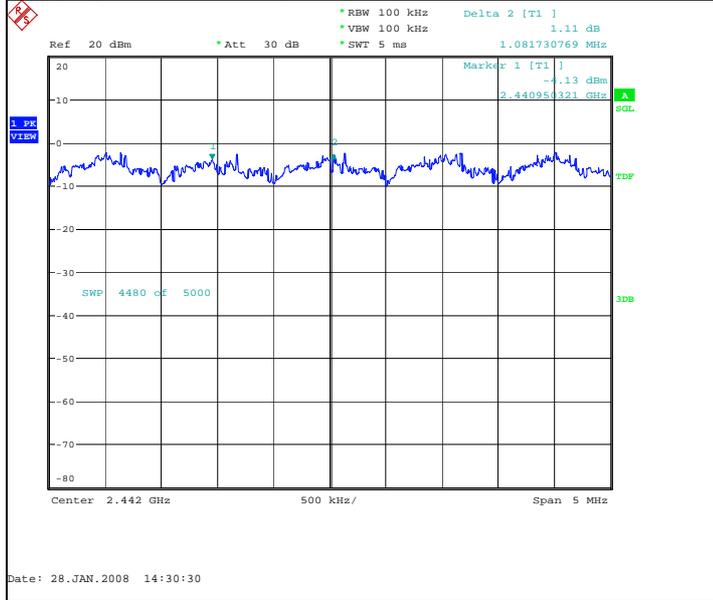

**10. Number of hopping frequencies**  
(FCC §15.247(a)(1)(iii), RSS-210 A8.1 (4))

<b>EUT with DUT number</b>	RM-379 DUT 41392
<b>Accessories with DUT numbers</b>	AC-3E DUT 40843 / BL-4CT DUT 41389 / HS-47 DUT 41390
<b>Operation Voltage [V] / [Hz]</b>	Nominal
<b>Result</b>	PASSED
<b>Remarks</b>	-
<b>Temp [°C] / Humidity [%RH] / Air Pressure [kPa]</b>	20 / 50 / 101.8
<b>Date of measurements</b>	28-Jan-2008
<b>Measured by</b>	Petteri Suni

**10.1. Test method and limit**

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

Limits for number of hopping frequencies measurements


<b>Limit [number]</b>
≥ 15

## 10.2. Bluetooth Test results

### 10.2.1 GFSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
79	PASSED


Hopping on, number of hopping frequencies

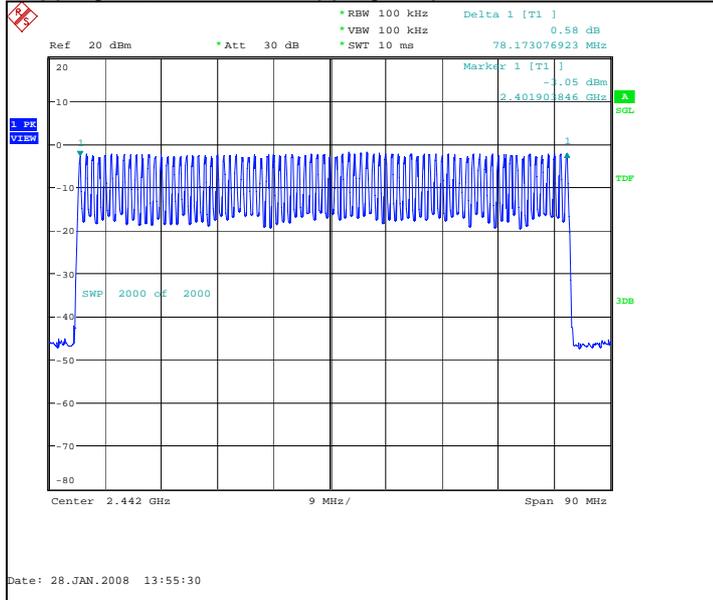

**10.2.2 8DPSK modulation, PRBS packet type**

Measured number of hopping frequencies	Result
75	PASSED

Hopping on, number of hopping frequencies

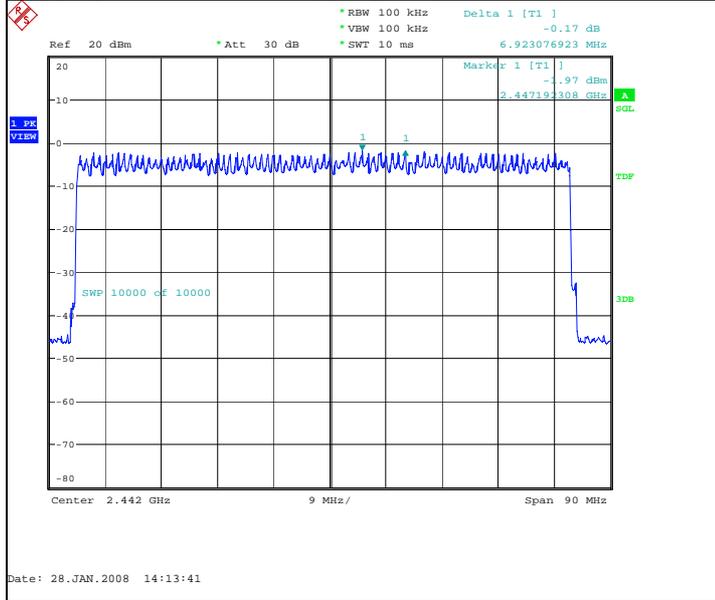

**11. Time of occupancy**  
(FCC §15.247(a)(1)(iii), RSS-210 A8.1 (4))

<b>EUT with DUT number</b>	RM-379 DUT 41392
<b>Accessories with DUT numbers</b>	AC-3E DUT 40843 / BL-4CT DUT 41389 / HS-47 DUT 41390
<b>Operation Voltage [V] / [Hz]</b>	Nominal
<b>Result</b>	PASSED
<b>Remarks</b>	-
<b>Temp [°C] / Humidity [%RH] / Air Pressure [kPa]</b>	20 / 50 / 101.8
<b>Date of measurements</b>	28-Jan-2008
<b>Measured by</b>	Petteri Suni

**11.1. Test method and limit**

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210 as follows:

The total time of occupancy is get by multiplying the measured number of transmissions occurred during 31.6 second period with the duration of one transmission.

Limits for time of occupancy measurements


Limit [s]
≤ 0.4

## 11.2. Bluetooth test results


### 11.2.1 GFSK modulation, PRBS packet type

Measured number of transmissions	Duration of one transmission [ $\mu$ s]	Time of occupancy [s]	Result
85	2,917	0.247917	PASSED

Hopping on, number of transmissions, channel 40 / 2442 MHz

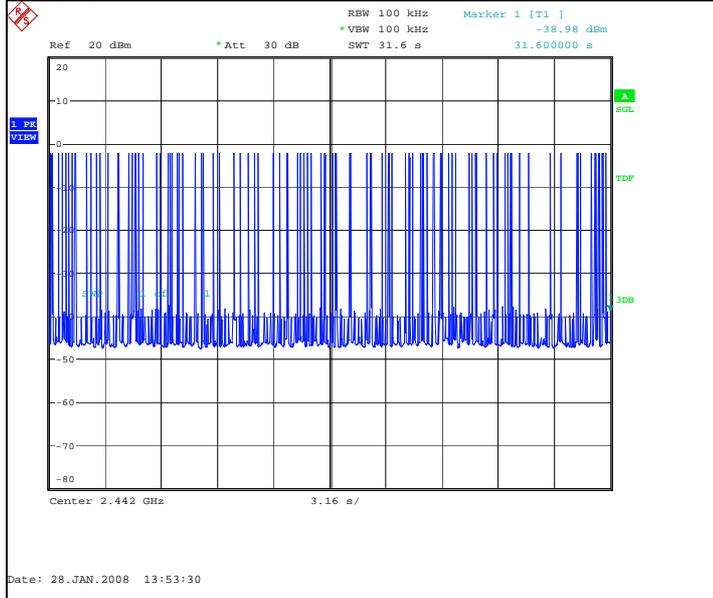


Hopping on, duration of one transmission, channel 40 / 2442 MHz

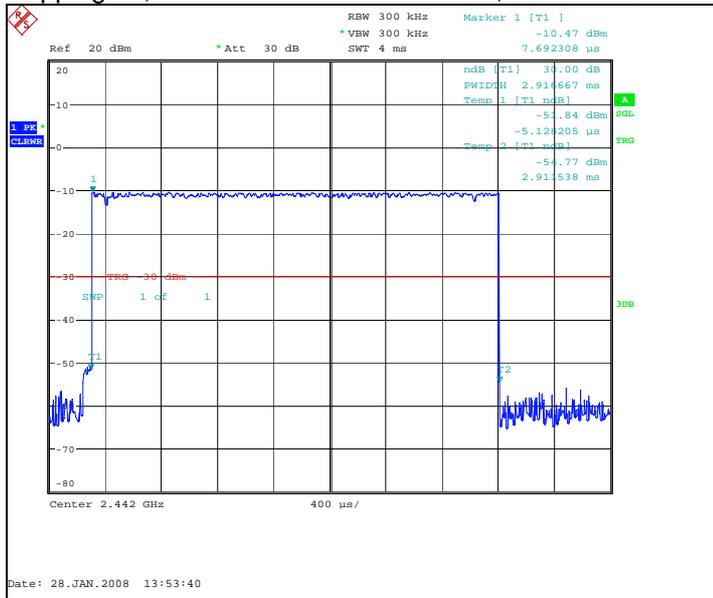


**11.2.2 8DPSK modulation, PRBS packet type**

Measured number of transmissions	Duration of one transmission [ $\mu$ s]	Time of occupancy [s]	Result
79	2,923	0.230923	PASSED

Hopping on, number of transmissions, channel 40 / 2442 MHz

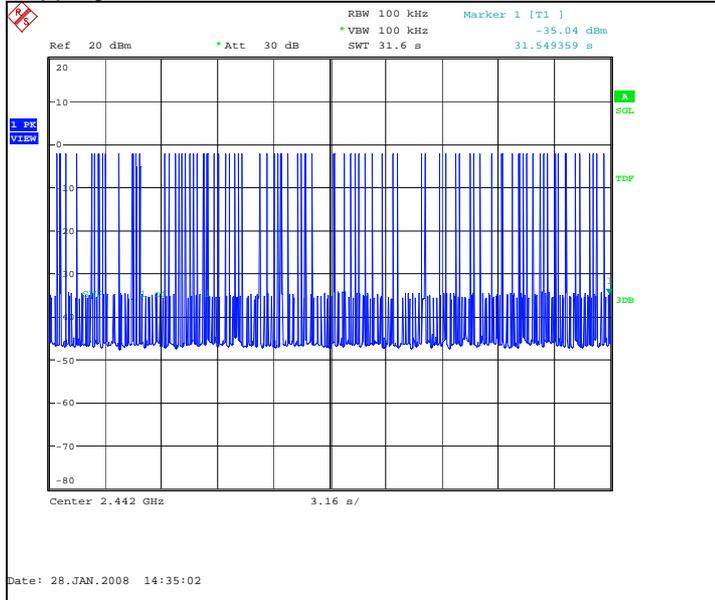

Hopping on, duration of one transmission, channel 40 / 2442 MHz

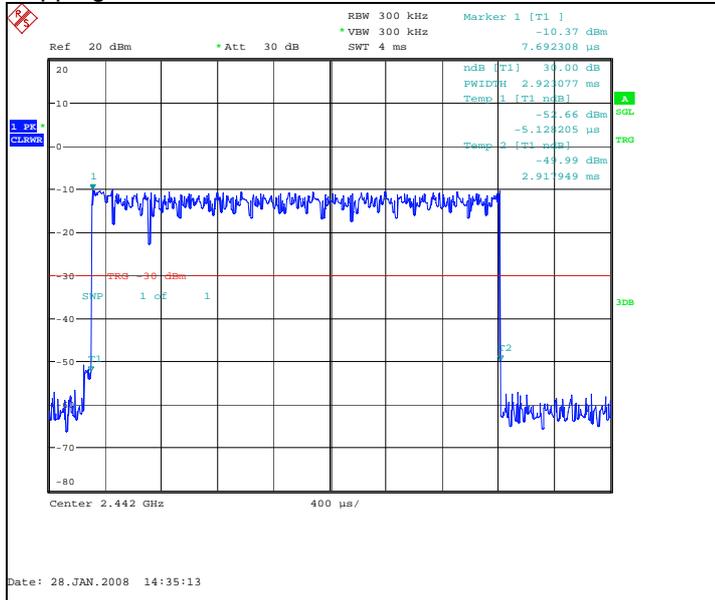

## 12. Test Equipment

### 12.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM30597	Power splitter	11667A	Agilent	22/24/27, 15C
TM37499	Power splitter	11667A	Agilent	22/24/27, 15C
TM38111	Multimeter	34401A	Agilent	22/24/27, 15C
TM38112	DC power supply	6632A	Agilent	22/24/27, 15C
TM22901	Attenuator	8496A	Agilent	22/24/27, 15C
TM30636	Artificial mains net	L2-16	PMM	15C, 15B
TM37678	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM37773	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM30600	Pulse Limiter	ESH3-Z2	R&S	15C, 15B
TM26490	LISN 50 $\mu$ H	ESH3-Z5	R&S	15C, 15B
TM37610	Spectrum analyzer	FSU	R&S	22/24/27, 15C
TM22835	Multimeter	87	Fluke	15C, 15B
TM37500	Microwave switch system	7116-MSW	Keithley	22/24/27, 15C, 15B
TM22638	Power supply	OL63743-901	Transformatric	22/24/27, 15C, 15B
	Temperature chamber	VT4002	Vötsch	22/24/27, 15C
2058	EMI Test receiver	ESPC	R&S	15C, 15B
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B
2002	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B

### 12.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM30599	3m semi-anechoic chamber		TDK	22/24/27, 15C, 15B
TM38845	EMI receiver	ESI 40	R&S	22/24/27, 15C, 15B
TM37498	Preamplifier	AMF-5D-020180-26-10P	MITEQ	22/24/27, 15C, 15B
TM37523	Preamplifier	AMF-4D-10M-3G-25-20P	MITEQ	22/24/27, 15C, 15B
TM37516	Biconilog antenna	HL562	R&S	22/24/27, 15C, 15B
TM26496	Double ridged waveguide antenna	3115	EMCO	22/24/27, 15C, 15B
TM39158	Horn antenna	3116	EMCO	22/24/27, 15C, 15B
TM26492	Reference dipole set	UHAP/VHAP	Schwarzbeck	22/24/27, 15C, 15B
TM37501	Dipole antenna	3125-870	EMCO	22/24/27
TM37502	Dipole antenna	3125-1880	EMCO	22/24/27
TM37773	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM38631	Signal generator	83640L	Agilent	22/24/27, 15C, 15B
TM38066	High pass filter	4HC3000/18000-3-KK	Trilithic	22/24/27, 15C, 15B
TM26511	Tunable notch filter	WRCA870	Wainwright	22/24/27
TM38215	Tunable notch filter	WRCD1850/1910-0.2/40	Wainwright	22/24/27
TM38214	Band reject filter	WRCT 2402/2480-2400/2483.5-30	Wainwright	15C
TM30642	Mast/Turntable controller	HD-100	Deisel	22/24/27, 15C, 15B
TM26500	Turntable	DS412	Deisel	22/24/27, 15C, 15B
TM38842	Antenna mast controller	2090	EMCO	22/24/27, 15C, 15B
TM38843	Antenna mast	2075	EMCO	22/24/27, 15C, 15B
TM38114	DC power supply	6632A	Agilent	22/24/27, 15C, 15B
TM38323	Preamplifier	PA-02 18-26 GHz	EMC Automation	22/24/27, 15C, 15B
TM37678	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B
TM22638	Power supply	OL63743-901	Transformatric	22/24/27, 15C, 15B
TM23892	Yaesu controller	G-1000SDX	Yaesu	22/24/27, 15C, 15B
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B

---

Eq. No	Equipment	Type	Manufacturer	Used in
2002	Radio communication tester	CMU-200	R&S	22/24/27, 15C, 15B