

## 6. Band Edge

### 6.1. Test Equipment

#### RF Conducted Measurement

The following test equipments are used during the band edge tests:

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2011
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2011
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2012

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

#### RF Radiated Measurement:


The following test equipments are used during the band edge tests:

Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
☒ Site # 3		Bilog Antenna	Schaffner Chase	CBL6112B/2673	Sep., 2011
	X	Horn Antenna	Schwarzbeck	BBHA9120D/D305	Sep., 2011
		Horn Antenna	Schwarzbeck	BBHA9170/208	Jul., 2011
	X	Pre-Amplifier	Agilent	8447D/2944A09549	Sep., 2011
	X	Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2011
		Test Receiver	R & S	ESCS 30/ 825442/018	Sep., 2011
	X	Coaxial Cable	Quietek	QTK-CABLE/ CAB5	Feb., 2012
	X	Controller	Quietek	QTK-CONTROLLER/ CTRL3	N/A
	X	Coaxial Switch	Anritsu	MP59B/6200265729	N/A


- Note:
1. All instruments are calibrated every one year.
  2. The test instruments marked by “X” are used to measure the final test results.

## 6.2. Test Setup

### RF Conducted Measurement:

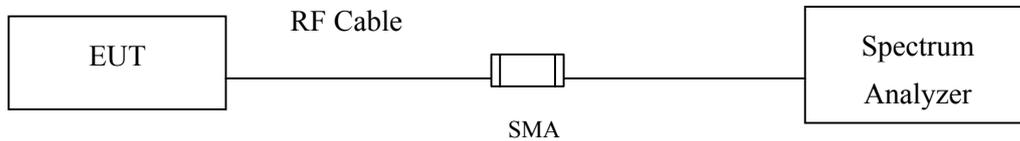

### RF Radiated Measurement:

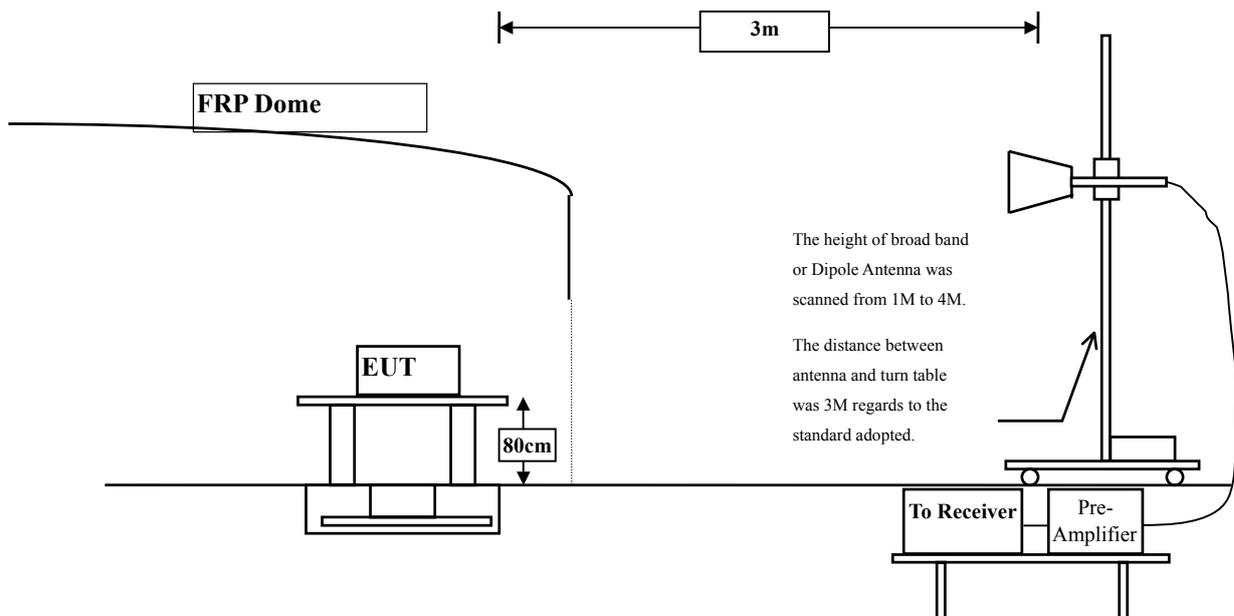

## 6.3. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

#### **6.4. Test Procedure**

The EUT was setup according to ANSI C63.4, 2003 and tested according to DTS test procedure of Jan. 2012 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4:2003 on radiated measurement.

#### **6.5. Uncertainty**

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

## 6.6. Test Result of Band Edge

Product : Wireless Music System  
 Test Item : Band Edge Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)

### Fundamental Filed Strength

Antenna Pole	Frequency [MHz]	Correction Factor [dB/m]	Reading Level [dBuV]	Emission Level [dBuV/m]	Detector
Horizontal	2412	31.646	72.616	104.262	Peak
Horizontal	2412	31.66	68.804	100.464	Average
Vertical	2412	30.956	77.025	107.981	Peak
Vertical	2412	30.968	73.224	104.192	Average

Note: 1:Spectrum Analyzer setting:

Peak detector: RBW=1MHz, VBW=1MHz

Average detector: RBW=1MHz, VBW=10Hz

### Band Edge Test Data

Antenna Pole	Test Frequency (MHz)	Fundamental (dBuV/m)	$\Delta$ (dB)	Band Edge Field Strength (dBuV/m)	Limit (dBuV/m)	Detector
Horizontal	2386.3	104.262	43.18	61.082	74.000	Peak
Horizontal	2386.6	100.464	50.373	50.091	54.000	Average
Vertical	2386.3	107.981	43.18	64.801	74.000	Peak
Vertical	2386.6	104.192	50.373	53.819	54.000	Average

Note:


The Band Edge Field Strength was calculated using the Fundamental and Conducted Band Edge measurements per the Marker-Delta Method with the following formula:

Band Edge field Strength = F -  $\Delta$

F = Fundamental field Strength (Peak or Average)

$\Delta$  = Conducted Band Edge Delta (Peak or Average)

### Peak Detector of conducted Band Edge Delta

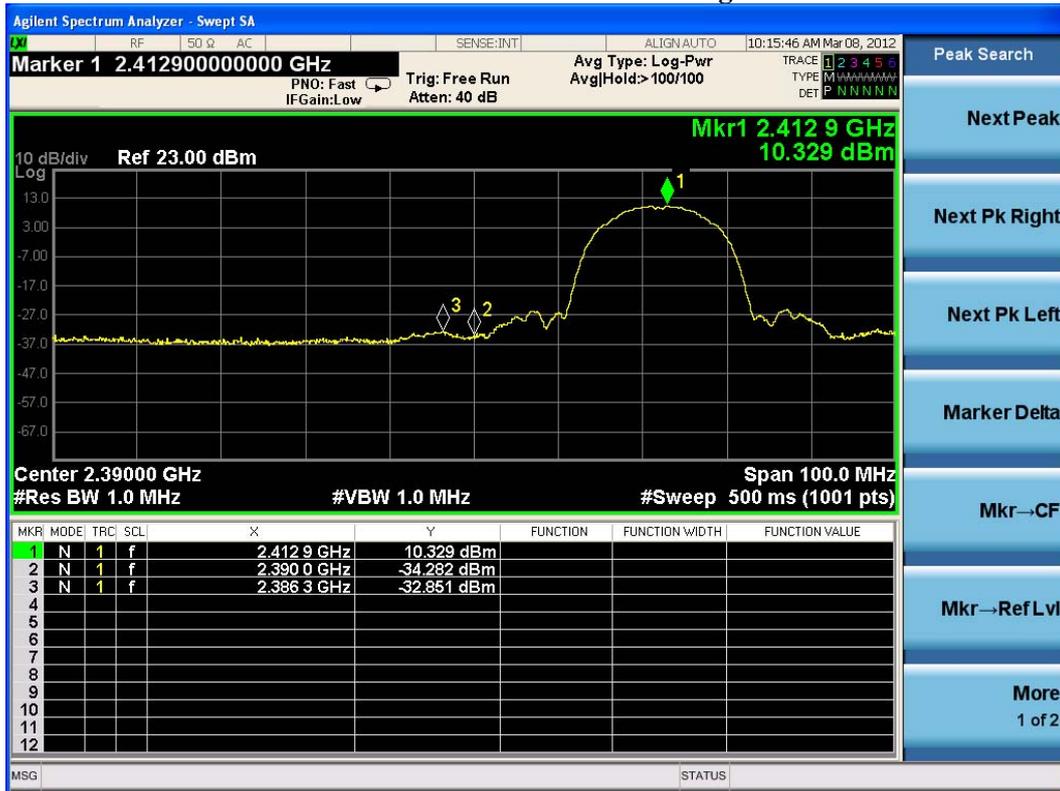

### Average Detector of conducted Band Edge Delta



Product : Wireless Music System  
 Test Item : Band Edge Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)

**Fundamental Filed Strength**

Antenna Pole	Frequency [MHz]	Correction Factor [dB/m]	Reading Level [dBuV]	Emission Level [dBuV/m]	Detector
Horizontal	2462	32.026	68.293	100.319	Peak
Horizontal	2462	32.013	64.686	96.699	Average
Vertical	2462	31.296	74.987	106.283	Peak
Vertical	2462	31.285	71.291	102.575	Average

Note: 1: Spectrum Analyzer setting:

Peak detector: RBW=1MHz, VBW=1MHz

Average detector: RBW=1MHz, VBW=10Hz

**Band Edge Test Data**

Antenna Pole	Test Frequency (MHz)	Fundamental (dBuV/m)	$\Delta$ (dB)	Band Edge Field Strength (dBuV/m)	Limit (dBuV/m)	Detector
Horizontal	2490.2	100.319	41.437	58.882	74.000	Peak
Horizontal	2488	96.699	50.883	45.816	54.000	Average
Vertical	2490.2	106.283	41.437	64.846	74.000	Peak
Vertical	2488	102.575	50.883	51.692	54.000	Average

Note:


The Band Edge Field Strength was calculated using the Fundamental and Conducted Band Edge measurements per the Marker-Delta Method with the following formula:

Band Edge field Strength = F -  $\Delta$

F = Fundamental field Strength (Peak or Average)

$\Delta$  = Conducted Band Edge Delta (Peak or Average)

### Peak Detector of conducted Band Edge Delta

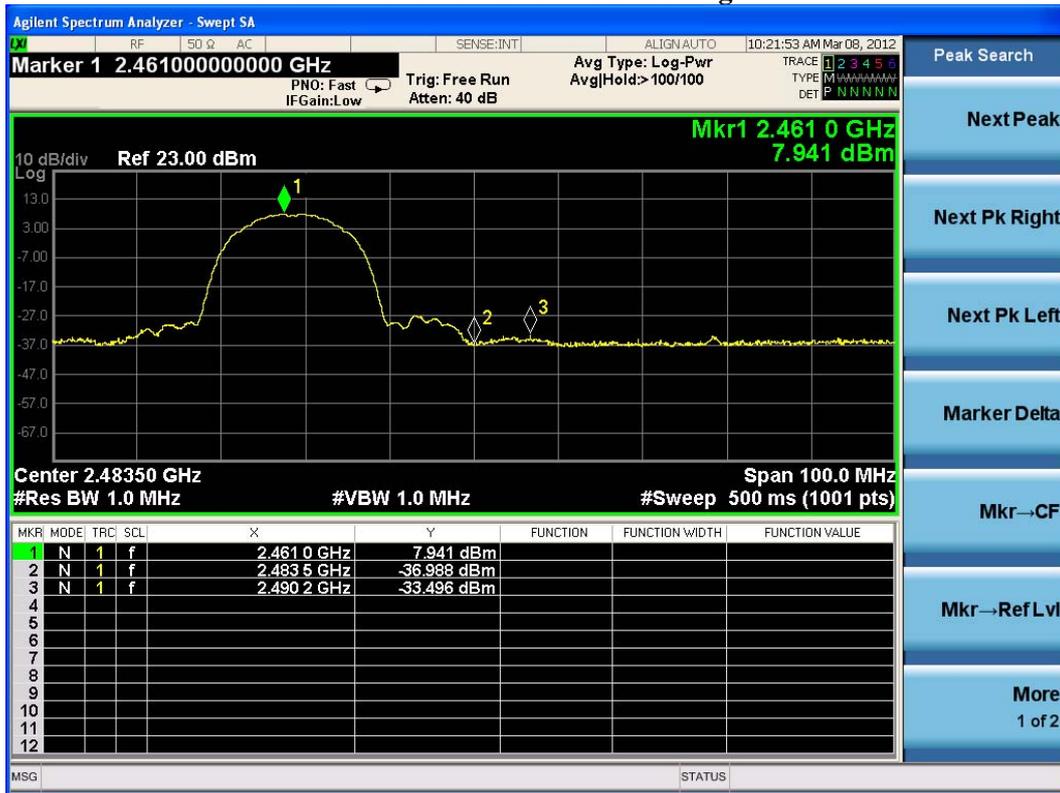

### Average Detector of conducted Band Edge Delta



Product : Wireless Music System  
 Test Item : Band Edge Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

**Fundamental Filed Strength**

Antenna Pole	Frequency [MHz]	Correction Factor [dB/m]	Reading Level [dBuV]	Emission Level [dBuV/m]	Detector
Horizontal	2412	31.67	71.107	102.776	Peak
Horizontal	2412	31.598	56.702	88.301	Average
Vertical	2412	30.977	78.592	109.568	Peak
Vertical	2412	30.932	63.297	94.23	Average

Note: 1: Spectrum Analyzer setting:

Peak detector: RBW=1MHz, VBW=1MHz

Average detector: RBW=1MHz, VBW=10Hz

**Band Edge Test Data**

Antenna Pole	Test Frequency (MHz)	Fundamental (dBuV/m)	$\Delta$ (dB)	Band Edge Field Strength (dBuV/m)	Limit (dBuV/m)	Detector
Horizontal	2388.9	102.776	37.88	64.896	74.000	Peak
Horizontal	2390	88.301	40.42	47.881	54.000	Average
Vertical	2388.9	109.568	37.88	71.688	74.000	Peak
Vertical	2390	94.23	40.42	53.81	54.000	Average

Note:

The Band Edge Field Strength was calculated using the Fundamental and Conducted Band Edge measurements per the Marker-Delta Method with the following formula:

Band Edge field Strength = F -  $\Delta$


F = Fundamental field Strength (Peak or Average)

$\Delta$  = Conducted Band Edge Delta (Peak or Average)

### Peak Detector of conducted Band Edge Delta



### Average Detector of conducted Band Edge Delta

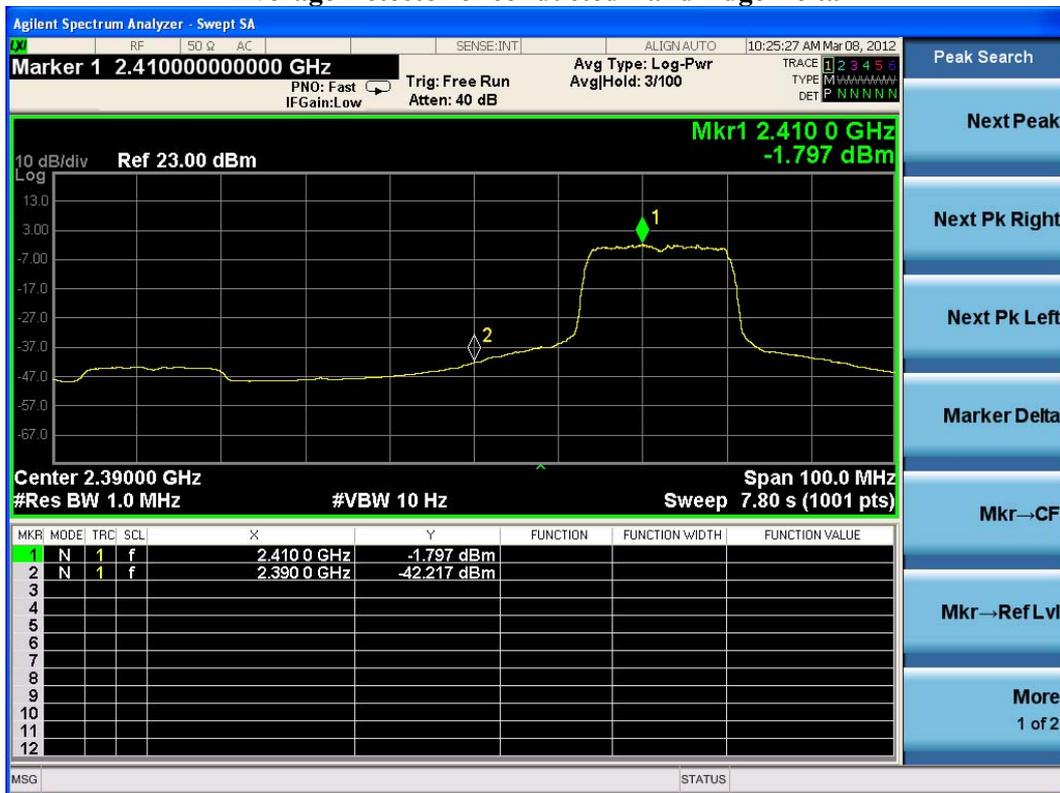

Product : Wireless Music System  
 Test Item : Band Edge Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

**Fundamental Filed Strength**

Antenna Pole	Frequency [MHz]	Correction Factor [dB/m]	Reading Level [dBuV]	Emission Level [dBuV/m]	Detector
Horizontal	2462	32.002	72.313	104.315	Peak
Horizontal	2462	31.998	56.339	88.336	Average
Vertical	2462	31.307	77.069	108.376	Peak
Vertical	2462	31.281	61.076	92.357	Average

Note: 1: Spectrum Analyzer setting:

Peak detector: RBW=1MHz, VBW=1MHz

Average detector: RBW=1MHz, VBW=10Hz

**Band Edge Test Data**

Antenna Pole	Test Frequency (MHz)	Fundamental (dBuV/m)	$\Delta$ (dB)	Band Edge Field Strength (dBuV/m)	Limit (dBuV/m)	Detector
Horizontal	2485	104.315	38.267	66.048	74.000	Peak
Horizontal	2483.5	88.336	40.529	47.807	54.000	Average
Vertical	2485	108.376	38.267	70.109	74.000	Peak
Vertical	2483.5	92.357	40.529	51.828	54.000	Average

Note:

The Band Edge Field Strength was calculated using the Fundamental and Conducted Band Edge measurements per the Marker-Delta Method with the following formula:

Band Edge field Strength = F -  $\Delta$


F = Fundamental field Strength (Peak or Average)

$\Delta$  = Conducted Band Edge Delta (Peak or Average)

### Peak Detector of conducted Band Edge Delta



### Average Detector of conducted Band Edge Delta

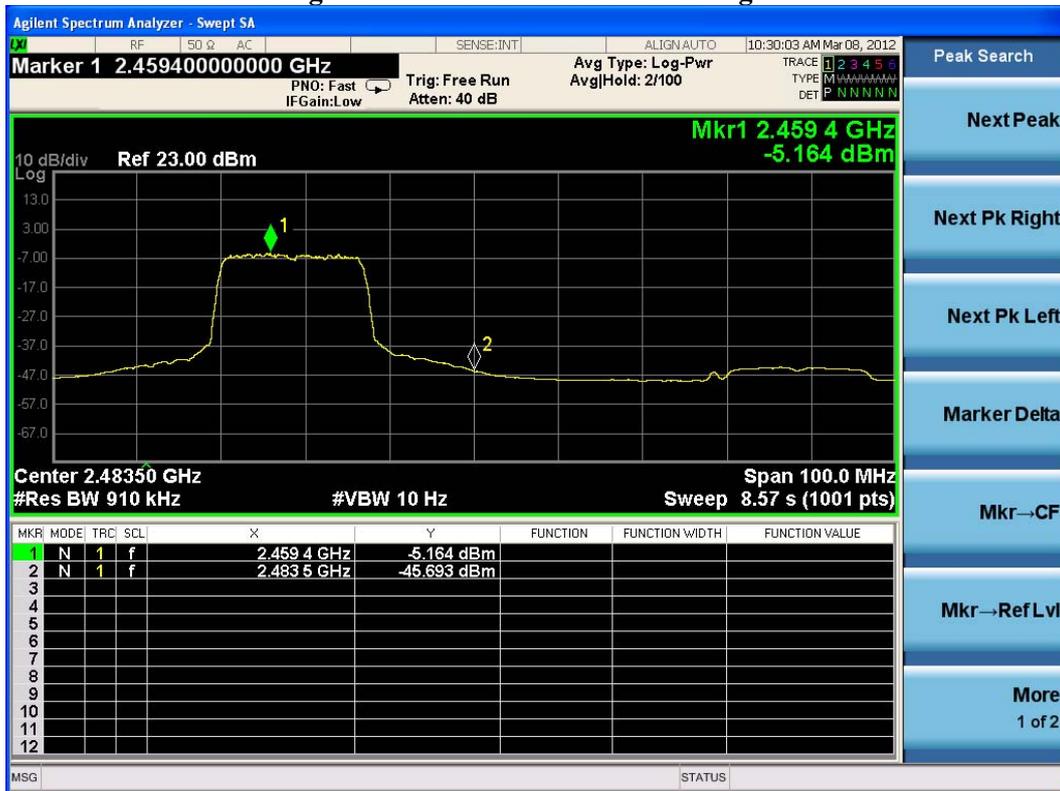

**7. Occupied Bandwidth**


**7.1. Test Equipment**

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2011
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2011
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2012

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

**7.2. Test Setup**

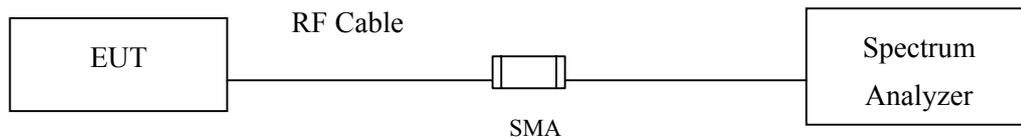

**7.3. Limits**

The minimum bandwidth shall be at least 500 kHz.

**7.4. Test Procedure**

The EUT was setup according to ANSI C63.4, 2003; tested according to DTS test procedure of Jan. 2012 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 1-5% of the emission bandwidth, VBW ≥ 3\*RBW

**7.5. Uncertainty**


± 150Hz

### 7.6. Test Result of Occupied Bandwidth

Product : Wireless Music System  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2412MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
1	2412	10200	>500	Pass


**Figure Channel 1:**

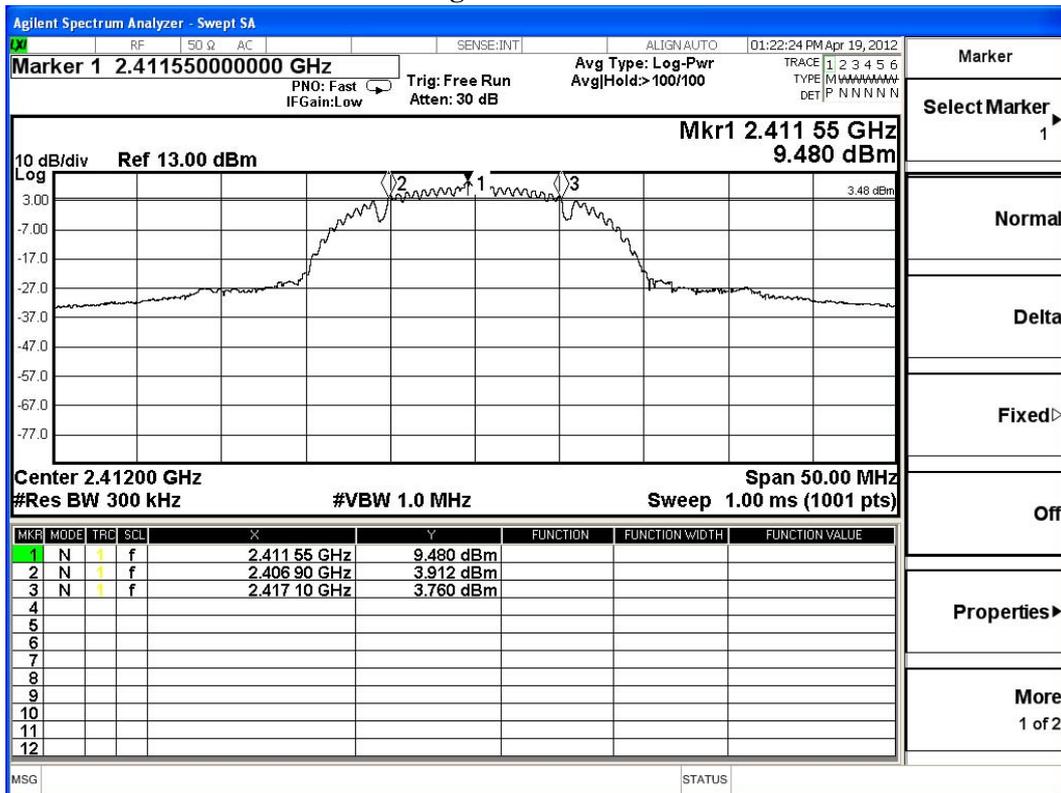

Product : Wireless Music System  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2437MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
6	2437	12200	>500	Pass


**Figure Channel 6:**

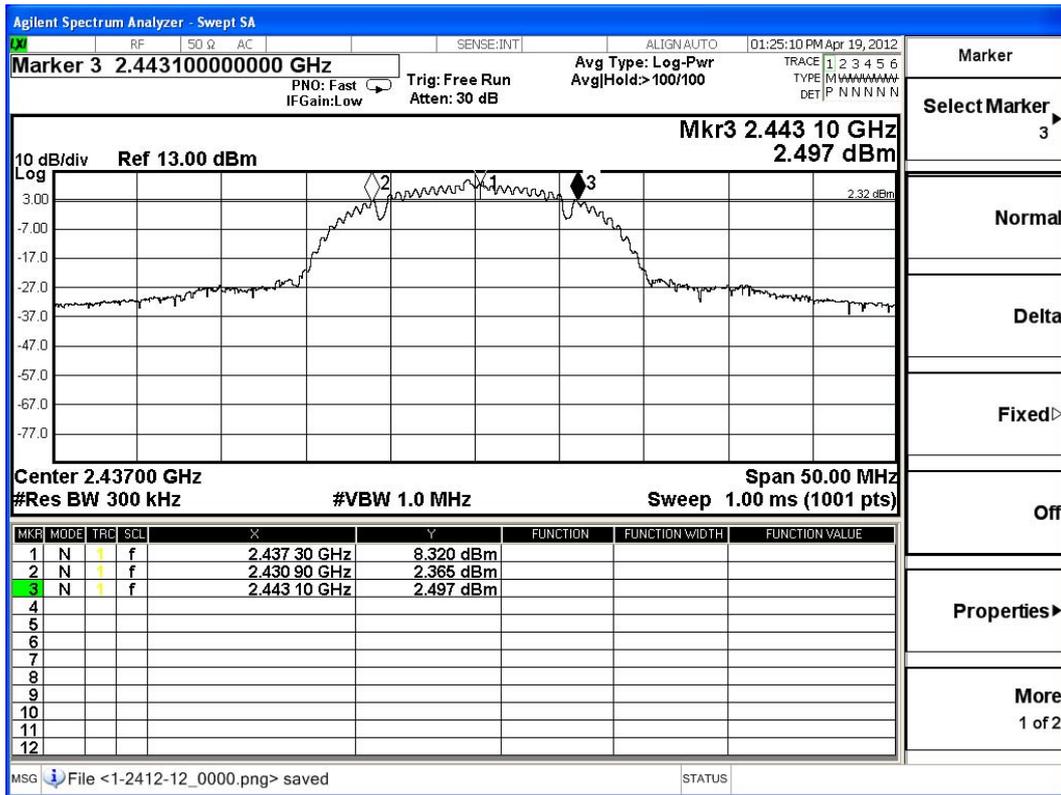

Product : Wireless Music System  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2462MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
11	2462	12200	>500	Pass


**Figure Channel 11:**

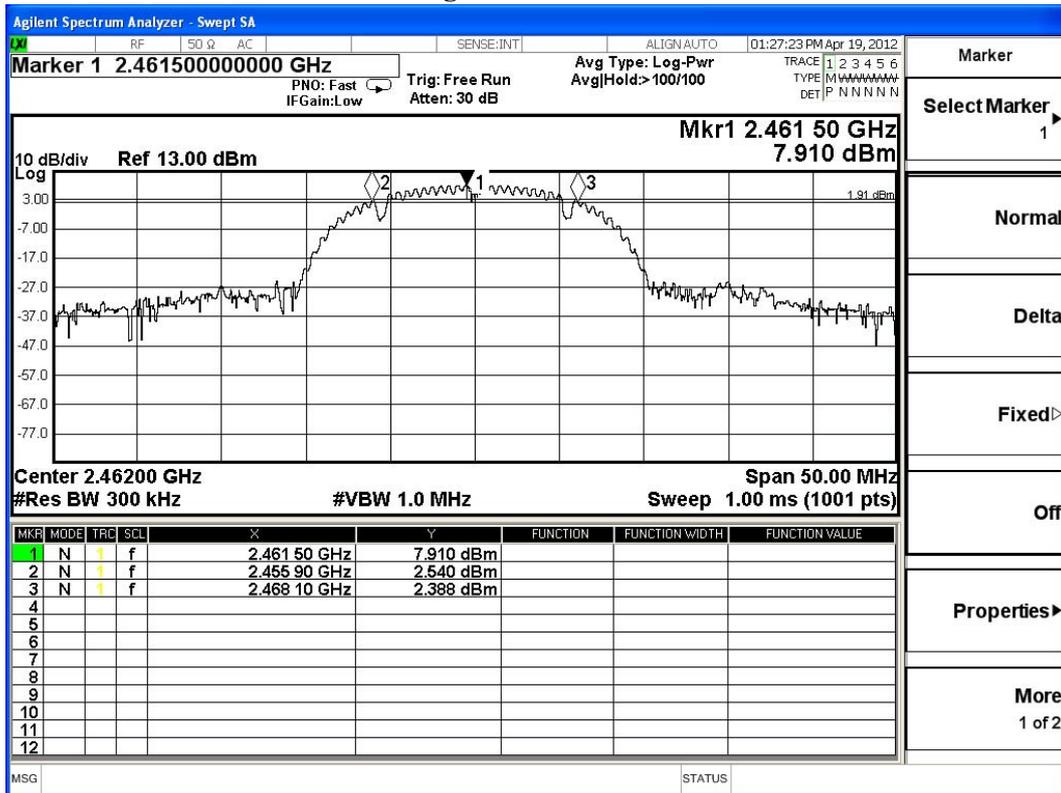

Product : Wireless Music System  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2412MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
1	2412	16450	>500	Pass


**Figure Channel 1:**

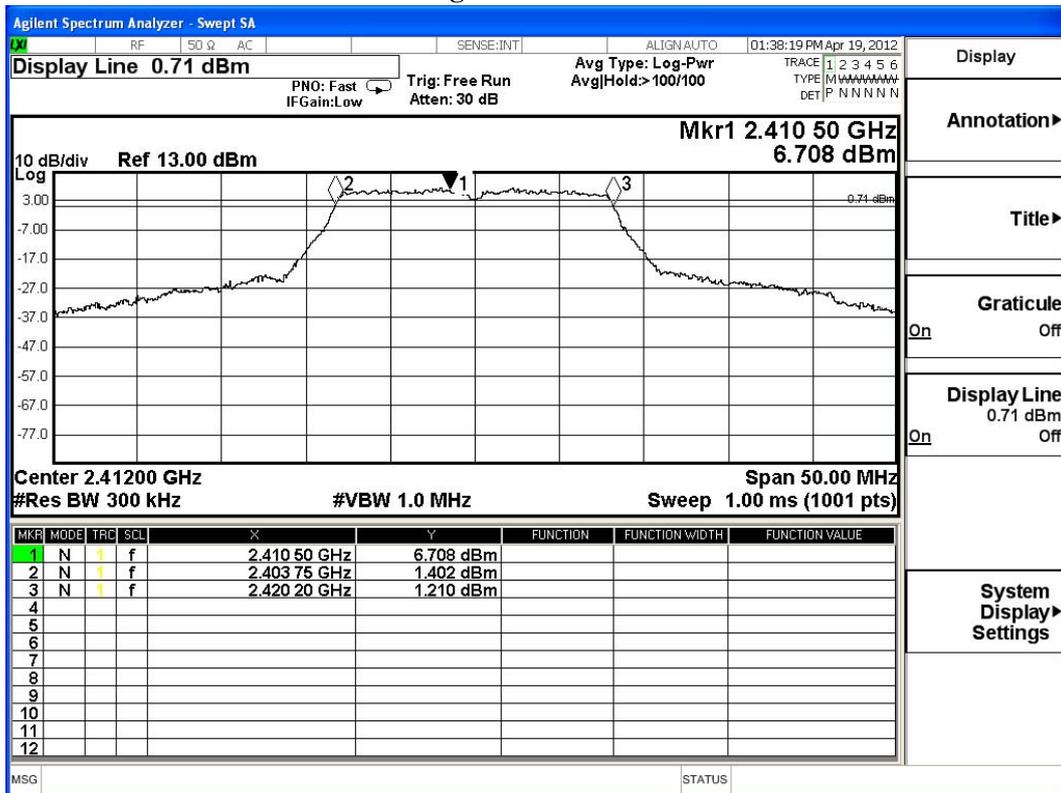

Product : Wireless Music System  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2437MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
6	2437	16450	>500	Pass


**Figure Channel 6:**

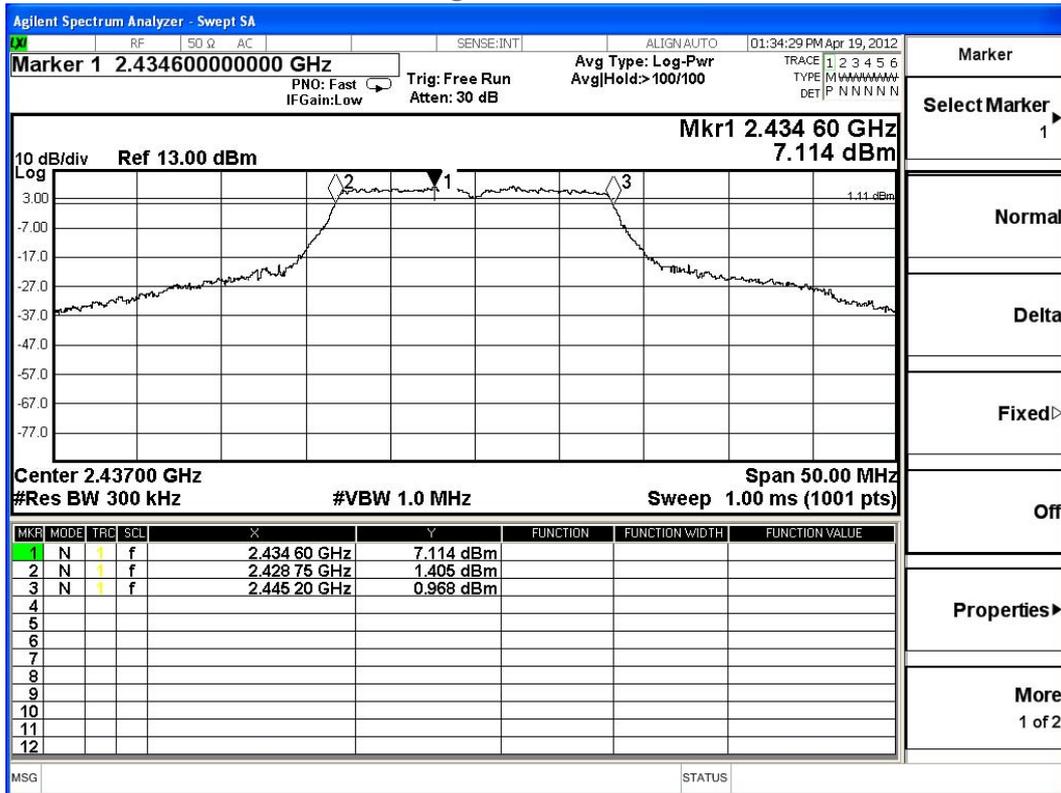

Product : Wireless Music System  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2462MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
11	2462	16450	>500	Pass

**Figure Channel 11:**

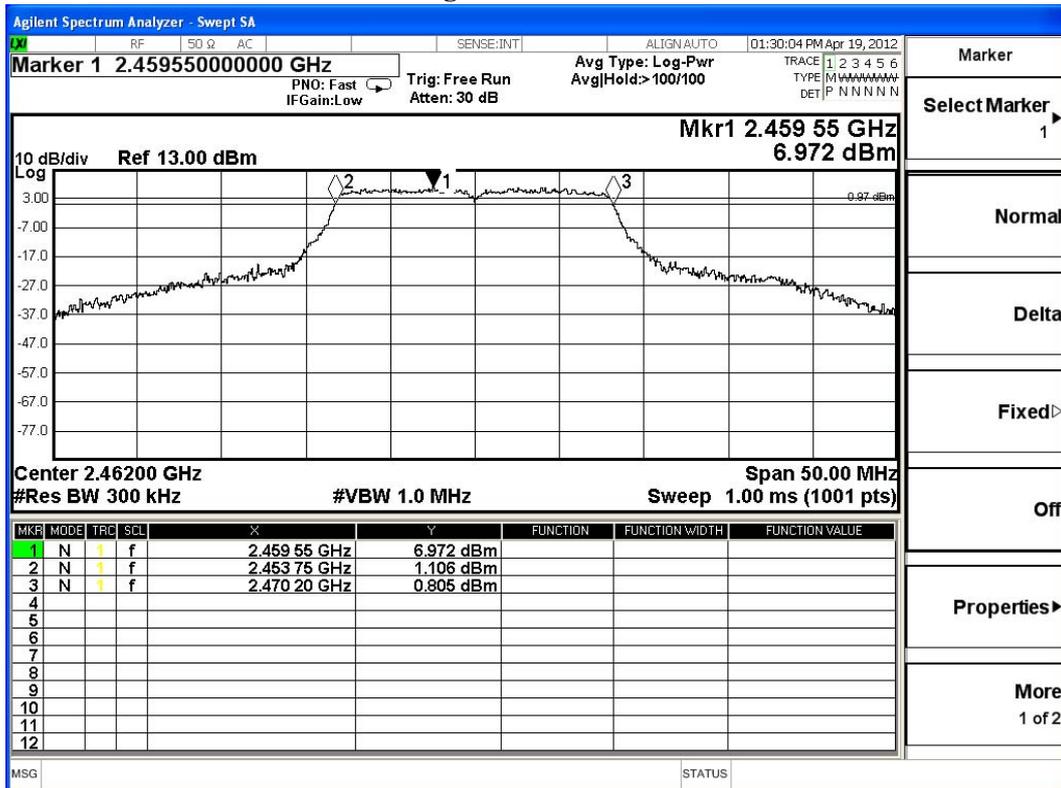

## 8. Power Density


### 8.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2011
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2011
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2012

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

### 8.2. Test Setup

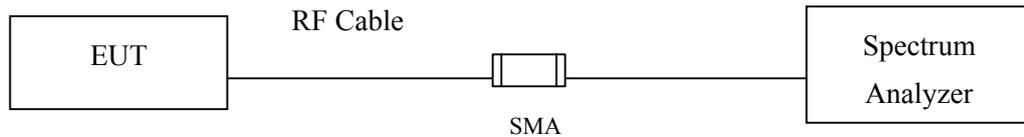

### 8.3. Limits

The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3kHz bandwidth.

### 8.4. Test Procedure

The EUT was setup according to ANSI C63.4, 2003; tested according to DTS test procedure of Jan. 2012 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Set RBW= 100 kHz, VBW $\geq$ 300KHz, SPAN to 5-30 % greater than the EBW,

Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where  $BWCF = 10\log(3\text{ kHz}/100\text{ kHz}) = -15.2\text{ dB}$ .

### 8.5. Uncertainty


$\pm 1.27\text{ dB}$



Product : Wireless Music System  
 Test Item : Power Density Data  
 Test Site : No.3OATS  
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2437MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
6	2437	-8.311	< 8dBm	Pass


**Figure Channel 6:**

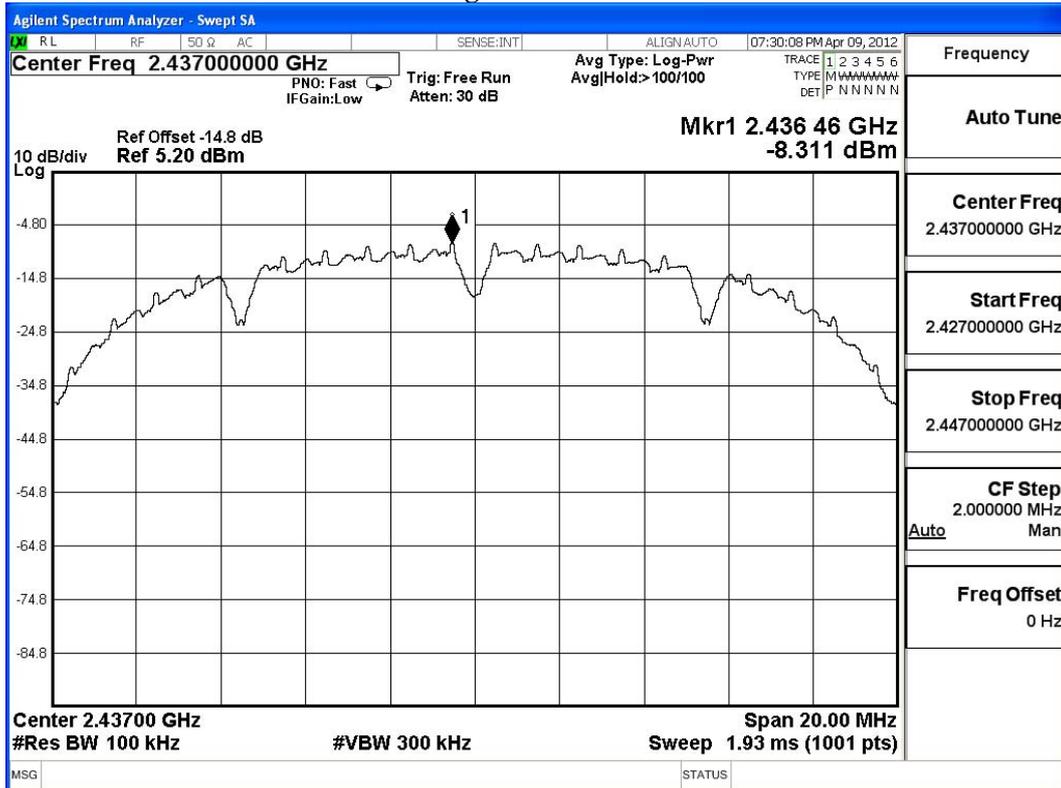

Product : Wireless Music System  
 Test Item : Power Density Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2462MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
11	2462	-10.871	< 8dBm	Pass


**Figure Channel 11:**

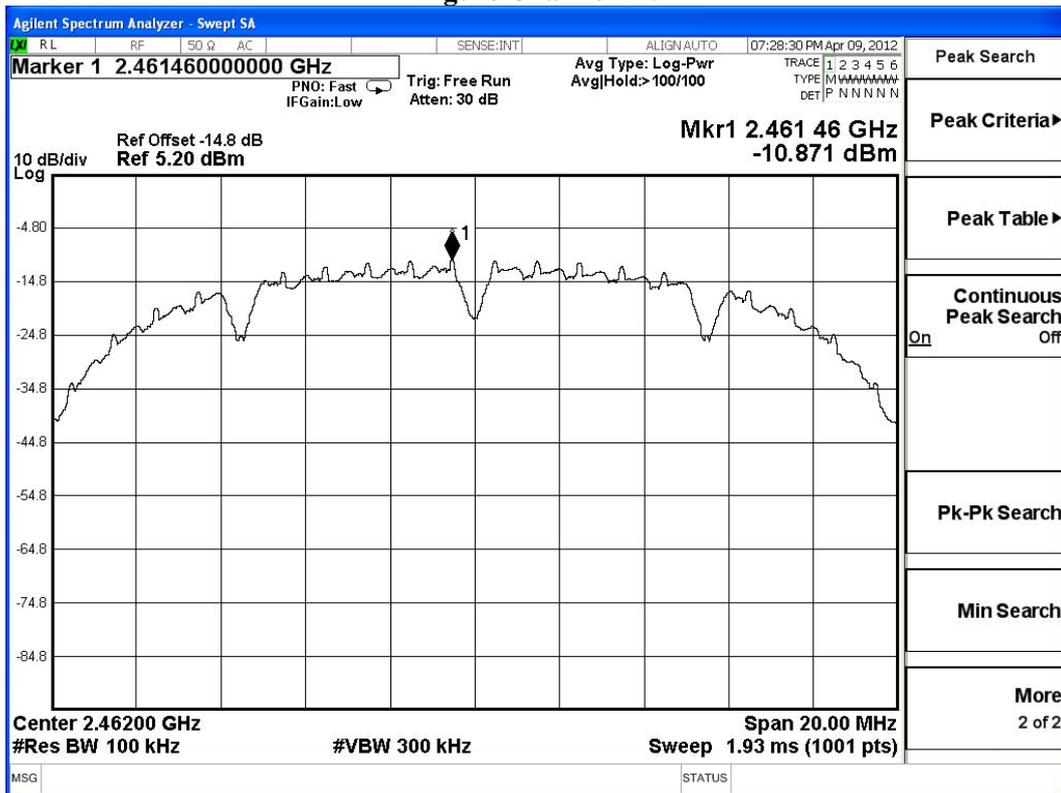

Product : Wireless Music System  
 Test Item : Power Density Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2412MHz)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
1	2412	-10.871	< 8dBm	Pass


**Figure Channel 1:**

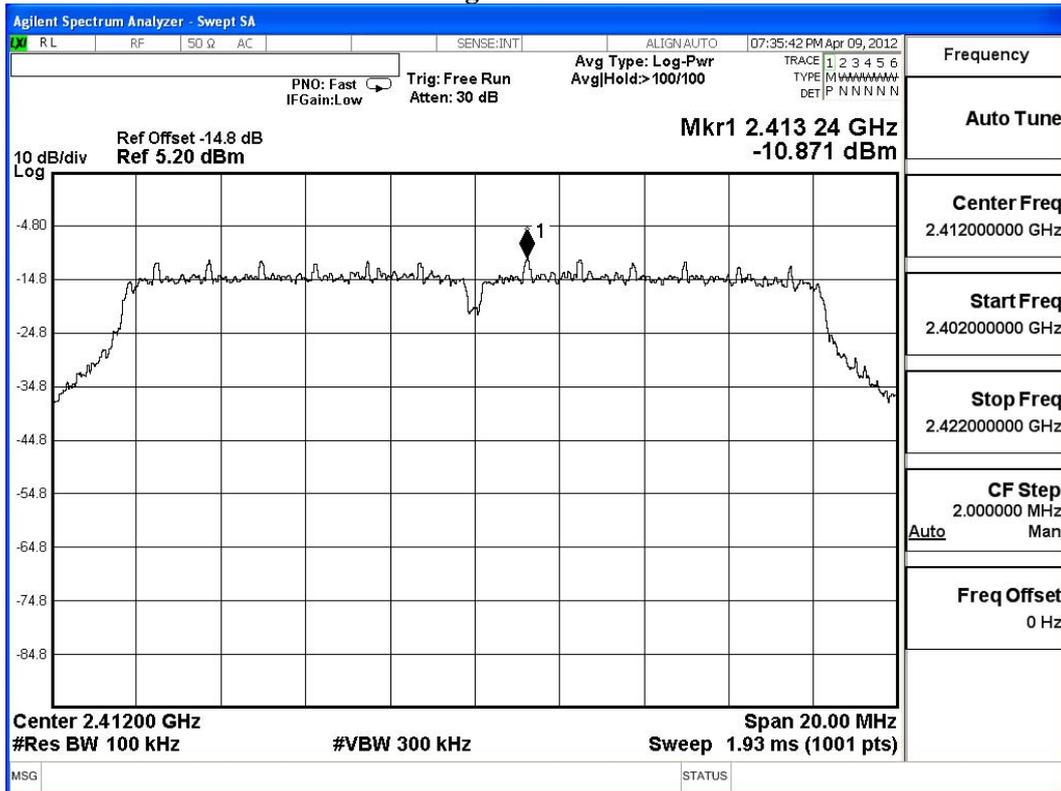

Product : Wireless Music System  
 Test Item : Power Density Data  
 Test Site : No.3OATS  
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2437MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
6	2437	-10.857	< 8dBm	Pass


**Figure Channel 6:**

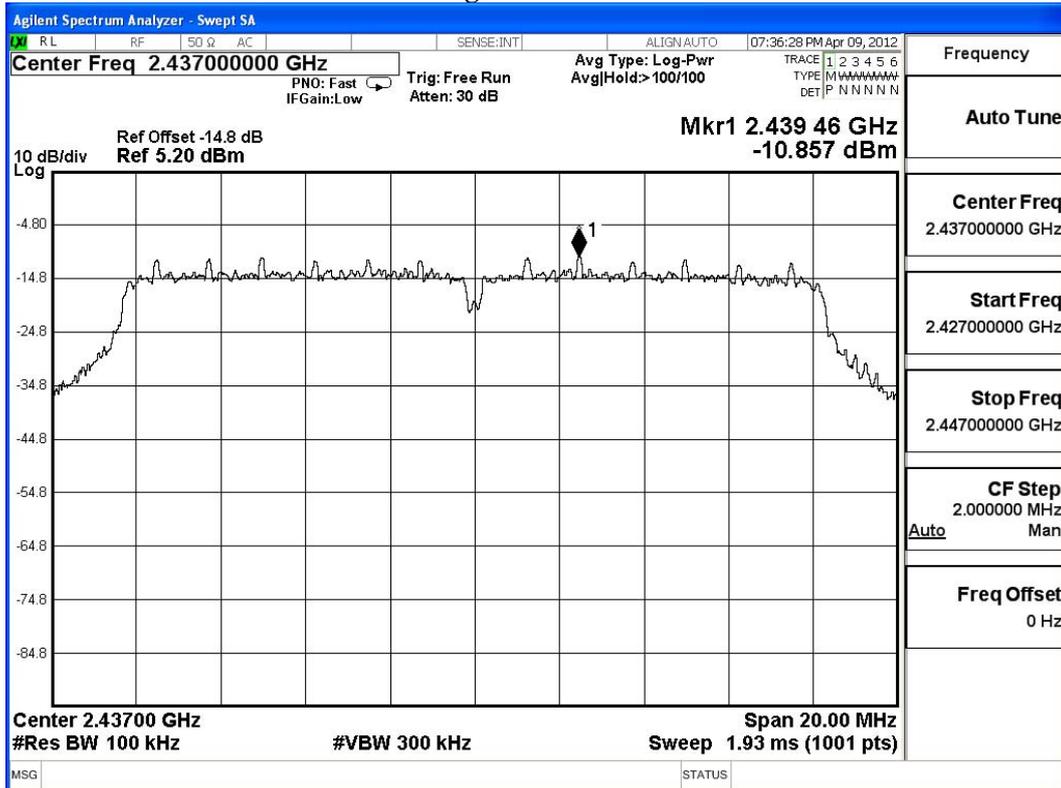

Product : Wireless Music System  
 Test Item : Power Density Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2462MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
11	2462	-11.437	< 8dBm	Pass

**Figure Channel 11:**

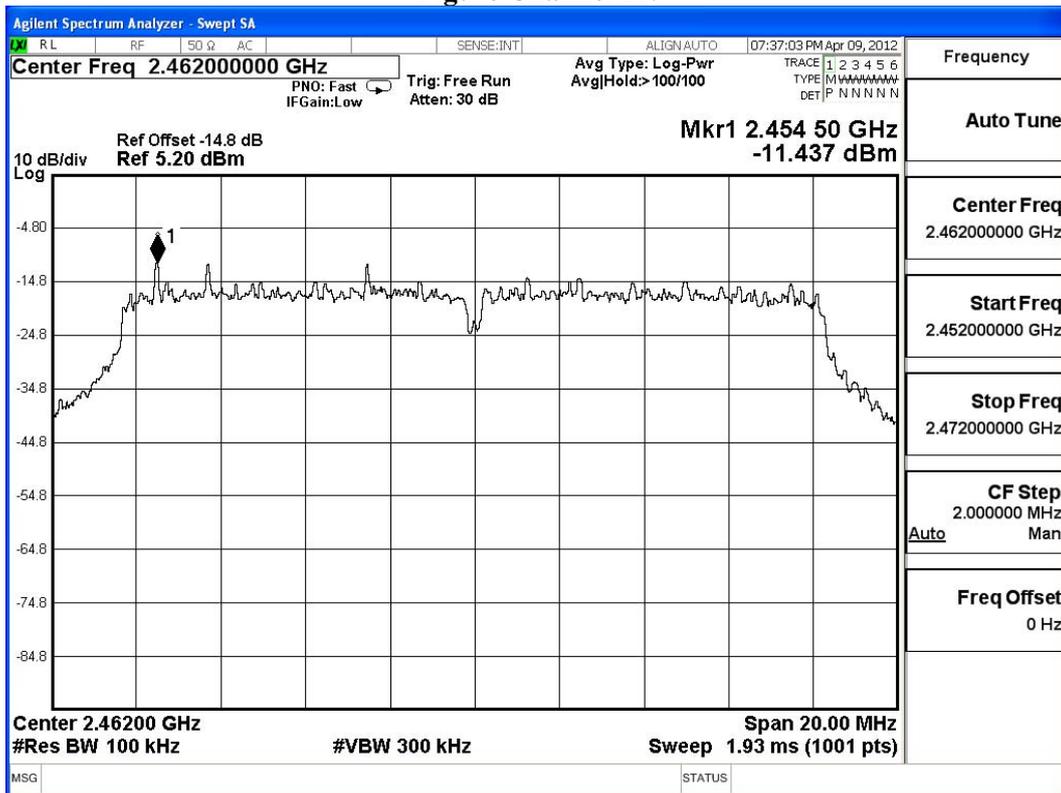

## 9. EMI Reduction Method During Compliance Testing

No modification was made during testing.